



FCC PART 15, SUBPART C ISED C RSS-247, ISSUE 2, FEBRUARY 2017



TEST REPORT

For

Roku, Inc.

1155 Coleman Avenue, San Jose, CA 95110, USA

FCC ID: TC2-R1044
IC: 5959A-R1041

Report Type: Original Report	Model: 3940X2
Prepared By: Christian Schwartz Test Engineer	
Report Number: R2206134-407	
Report Date: 2022-09-06	
Reviewed By: Chrisitan McCaig RF Lead Engineer	
<p>Bay Area Compliance Laboratories Corp. 1274 Anvilwood Avenue, Sunnyvale, CA 94089, USA Tel: +1 (408) 732-9162, Fax: +1 (408) 732-9164</p>	



Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by A2LA*, NIST, or any agency of the Federal Government.

* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "*" (Rev.2)

TABLE OF CONTENTS

1	GENERAL DESCRIPTION.....	5
1.1	PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2	OBJECTIVE	5
1.3	RELATED SUBMITTAL(S)/GRANT(S)	5
1.4	TEST METHODOLOGY	5
1.5	MEASUREMENT UNCERTAINTY	6
1.6	TEST FACILITY REGISTRATIONS	6
1.7	TEST FACILITY ACCREDITATIONS.....	6
2	EUT TEST CONFIGURATION.....	9
2.1	JUSTIFICATION.....	9
2.2	EUT EXERCISE SOFTWARE.....	9
2.3	DUTY CYCLE CORRECTION FACTOR.....	11
2.4	EQUIPMENT MODIFICATIONS.....	14
2.5	LOCAL SUPPORT EQUIPMENT	14
2.6	SUPPORT EQUIPMENT	14
2.7	INTERFACE PORTS AND CABLING	14
3	SUMMARY OF TEST RESULTS	15
4	FCC §2.1091, §15.407(F) & ISEDC RSS-102 - RF EXPOSURE.....	16
4.1	APPLICABLE STANDARDS	16
4.2	FCC RF EXPOSURE EXEMPTION EVALUATION PROCEDURES	18
4.3	RF EXPOSURE EVALUATION EXEMPTION FOR FCC	21
4.4	RF EXPOSURE EVALUATION EXEMPTION FOR IC.....	21
5	FCC §15.203 & ISEDC RSS-GEN §6.8 - ANTENNA REQUIREMENTS.....	22
5.1	APPLICABLE STANDARDS	22
5.2	ANTENNA LIST	23
6	FCC §15.207 & ISEDC RSS-GEN §8.8 - AC POWER LINE CONDUCTED EMISSIONS.....	24
6.1	APPLICABLE STANDARDS	24
6.2	TEST SETUP	24
6.3	TEST PROCEDURE	24
6.4	TEST SETUP BLOCK DIAGRAM.....	25
6.5	CORRECTED AMPLITUDE AND MARGIN CALCULATION	26
6.6	TEST EQUIPMENT LIST AND DETAILS	26
6.7	TEST ENVIRONMENTAL CONDITIONS.....	27
6.8	SUMMARY OF TEST RESULTS.....	27
6.9	CONDUCTED EMISSIONS TEST PLOTS AND DATA	28
7	FCC §15.209, §15.407(B) & ISEDC RSS-247 §6.2 - SPURIOUS RADIATED EMISSIONS	30
7.1	APPLICABLE STANDARD	30
7.2	TEST SETUP	32
7.3	TEST PROCEDURE	32
7.4	CORRECTED AMPLITUDE AND MARGIN CALCULATION	32
7.5	TEST SETUP BLOCK DIAGRAM.....	33
7.6	TEST EQUIPMENT LIST AND DETAILS	35
7.7	TEST ENVIRONMENTAL CONDITIONS.....	35
7.8	SUMMARY OF TEST RESULTS.....	36
7.9	RADIATED EMISSIONS TEST RESULT DATA	37
8	FCC §15.407(E) & ISEDC RSS-247 §6.2 - 6 DB, 26 DB, & 99% - OCCUPIED BANDWIDTH	57
8.1	APPLICABLE STANDARDS	57
8.2	MEASUREMENT PROCEDURE	57
8.3	TEST SETUP BLOCK DIAGRAM.....	57

8.4	TEST EQUIPMENT LIST AND DETAILS	58
8.5	TEST ENVIRONMENTAL CONDITIONS.....	58
8.6	TEST RESULTS	59
9	FCC §407(A) & ISEDC RSS-247 §6.2 - OUTPUT POWER.....	100
9.1	APPLICABLE STANDARDS	100
9.2	MEASUREMENT PROCEDURE	101
9.3	TEST SETUP BLOCK DIAGRAM.....	101
9.4	TEST EQUIPMENT LIST AND DETAILS	101
9.5	TEST ENVIRONMENTAL CONDITIONS.....	102
9.6	TEST RESULTS	103
10	FCC §15.407(A) & ISEDC RSS-247 §6.2 - POWER SPECTRAL DENSITY	107
10.1	APPLICABLE STANDARDS	107
10.2	MEASUREMENT PROCEDURE	108
10.3	TEST SETUP BLOCK DIAGRAM.....	108
10.4	TEST EQUIPMENT LIST AND DETAILS	109
10.5	TEST ENVIRONMENTAL CONDITIONS.....	109
10.6	TEST RESULTS	110
11	FCC §15.407(B) & ISEDC RSS-247 §6.2 - OUT OF BAND EMISSIONS.....	132
11.1	APPLICABLE STANDARDS	132
11.2	MEASUREMENT PROCEDURE	133
11.3	TEST SETUP BLOCK DIAGRAM.....	133
11.4	TEST EQUIPMENT LIST AND DETAILS	134
11.5	TEST ENVIRONMENTAL CONDITIONS.....	134
11.6	TEST RESULTS	134
12	FCC §15.407(H) & ISEDC RSS-247 §6.3 – DYNAMIC FREQUENCY SELECTION	174
12.1	APPLICABLE STANDARDS	174
12.2	DFS MEASUREMENT SYSTEM	177
12.3	SYSTEM BLOCK DIAGRAM.....	177
12.4	RADIATED METHOD	177
12.5	TEST PROCEDURE	178
12.6	TEST EQUIPMENT LIST AND DETAILS	178
12.7	TEST ENVIRONMENTAL CONDITIONS.....	178
12.8	TEST RESULTS	179
13	ANNEX A (NORMATIVE) – EUT TEST SETUP PHOTOGRAPHS	186
14	ANNEX B (NORMATIVE) – EUT EXTERNAL PHOTOGRAPHS	187
15	ANNEX C (NORMATIVE) – EUT INTERNAL PHOTOGRAPHS	188
16	ANNEX D (NORMATIVE) - A2LA ELECTRICAL TESTING CERTIFICATE	189

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	R2206134-407	Original Report	2022-09-06

1 General Description

1.1 Product Description for Equipment Under Test (EUT)

This test report was prepared on behalf of *Roku, Inc.*, and their product model: 3940X2, FCC ID: TC2-R1044, IC: 5959A-R1041 or the “EUT” as referred to in this report. It is a Set-Top-Box with 2.4GHz and 5GHz Wifi capability.

1.2 Objective

This report was prepared on behalf of *Roku, Inc* in accordance with FCC CFR47 §15.407 and ISEDC RSS-247 Issue 2, February 2017.

The objective was to determine compliance with FCC Part 15.407 and ISEDC RSS-247 rules for Output Power, Antenna Requirements, AC Line Conducted Emissions, Emission Bandwidth, Power spectral density, Conducted and Radiated Spurious Emissions.

1.3 Related Submittal(s)/Grant(s)

Equipment Class: DTS, FCC ID: TC2-R1044, IC: 5959A-R1041

1.4 Test Methodology

All measurements contained in this report were conducted in accordance with ANSI C63.10-2013, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz, and FCC KDB 789033 D02 General UNII Test Procedure New Rules v02r01.

1.5 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Parameter	Measurement uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.57 dB
Power Spectral Density, conducted	±1.48dB
Unwanted Emissions, conducted	±1.57dB
All emissions, radiated	±4.0 dB
AC power line Conducted Emission	±2.0 dB
Temperature	±2 ° C
Humidity	±5 %
DC and low frequency voltages	±1.0 %
Time	±2 %
Duty Cycle	±3 %

1.6 Test Facility Registrations

BACLs test facilities that are used to perform Radiated and Conducted Emissions tests are currently recognized by the Federal Communications Commission as Accredited with NIST Designation Number US1129.

BACL's test facilities that are used to perform Radiated and Conducted Emissions tests are currently registered with Industry Canada under Registration Numbers: 3062A-1, 3062A-2, and 3062A-3.

BACL is a Chinese Taipei Bureau of Standards Metrology and Inspection (BSMI) validated Conformity Assessment Body (CAB), under Appendix B, Phase I Procedures of the APEC Mutual Recognition Arrangement (MRA). BACL's BSMI Lab Code Number is: SL2-IN-E-1002R

BACL's test facilities that are used to perform AC Line Conducted Emissions, Telecommunications Line Conducted Emissions, Radiated Emissions from 30 MHz to 1 GHz, and Radiated Emissions from 1 GHz to 6 GHz are currently recognized as Accredited in accordance with the Voluntary Control Council for Interference [VCCI] Article 15 procedures under Registration Number A-0027.

1.7 Test Facility Accreditations

Bay Area Compliance Laboratories Corp. (BACL) is:

A- An independent, 3rd-Party, Commercial Test Laboratory accredited to ISO/IEC 17025:2017 by A2LA (Test Laboratory Accreditation Certificate Number 3297.02), in the fields of: Electromagnetic Compatibility and Telecommunications. Unless noted by an Asterisk (*) in the Compliance Matrix (See Section 3 of this Test Report), BACL's ISO/IEC 17025:2017 Scope of Accreditation includes all of the Test Method Standards and/or the Product Family Standards detailed in this Test Report..

BACL's ISO/IEC 17025:2017 Scope of Accreditation includes a comprehensive suite of EMC Emissions, EMC Immunity, Radio, RF Exposure, Safety and wireline Telecommunications test methods applicable to a wide range of product categories. These product categories include Central Office Telecommunications Equipment [including NEBS - Network Equipment Building Systems], Unlicensed and Licensed Wireless and RF devices,

Information Technology Equipment (ITE); Telecommunications Terminal Equipment (TTE); Medical Electrical Equipment; Industrial, Scientific and Medical Test Equipment; Professional Audio and Video Equipment; Industrial and Scientific Instruments and Laboratory Apparatus; Cable Distribution Systems, and Energy Efficient Lighting.

B- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3297.03) to certify

- For the USA (Federal Communications Commission):
 - 1- All Unlicensed radio frequency devices within FCC Scopes A1, A2, A3, and A4;
 - 2- All Licensed radio frequency devices within FCC Scopes B1, B2, B3, and B4;
 - 3- All Telephone Terminal Equipment within FCC Scope C.
- For the Canada (Industry Canada):
 - 1 All Scope 1-Licence-Exempt Radio Frequency Devices;
 - 2 All Scope 2-Licensed Personal Mobile Radio Services;
 - 3 All Scope 3-Licensed General Mobile & Fixed Radio Services;
 - 4 All Scope 4-Licensed Maritime & Aviation Radio Services;
 - 5 All Scope 5-Licensed Fixed Microwave Radio Services
 - 6 All Broadcasting Technical Standards (BETS) in the Category I Equipment Standards List.
- For Singapore (Info-Communications Development Authority (IDA)):
 - 1 All Line Terminal Equipment: All Technical Specifications for Line Terminal Equipment – Table 1 of IDA MRA Recognition Scheme: 2011, Annex 2
 2. All Radio-Communication Equipment: All Technical Specifications for Radio-Communication Equipment – Table 2 of IDA MRA Recognition Scheme: 2011, Annex 2
- For the Hong Kong Special Administrative Region:
 - 1 All Radio Equipment, per KHCA 10XX-series Specifications;
 - 2 All GMDSS Marine Radio Equipment, per HKCA 12XX-series Specifications;
 - 3 All Fixed Network Equipment, per HKCA 20XX-series Specifications.
- For Japan:
 - 1 MIC Telecommunication Business Law (Terminal Equipment):
 - All Scope A1 - Terminal Equipment for the Purpose of Calls;
 - All Scope A2 - Other Terminal Equipment
 - 2 Radio Law (Radio Equipment):
 - All Scope B1 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 1 of the Radio Law
 - All Scope B2 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 2 of the Radio Law
 - All Scope B3 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 3 of the Radio Law

C- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3297.01) to certify Products to USA's Environmental Protection Agency (EPA) ENERGY STAR Product Specifications for:

- 1 Electronics and Office Equipment:
 - for Telephony (ver. 3.0)
 - for Audio/Video (ver. 3.0)
 - for Battery Charging Systems (ver. 1.1)
 - for Set-top Boxes & Cable Boxes (ver. 4.1)
 - for Televisions (ver. 6.1)
 - for Computers (ver. 6.0)
 - for Displays (ver. 6.0)
 - for Imaging Equipment (ver. 2.0)
 - for Computer Servers (ver. 2.0)

- 2 Commercial Food Service Equipment
 - for Commercial Dishwashers (ver. 2.0)
 - for Commercial Ice Machines (ver. 2.0)
 - for Commercial Ovens (ver. 2.1)
 - for Commercial Refrigerators and Freezers
- 3 Lighting Products
 - For Decorative Light Strings (ver. 1.5)
 - For Luminaires (including sub-components) and Lamps (ver. 1.2)
 - For Compact Fluorescent Lamps (CFLs) (ver. 4.3)
 - For Integral LED Lamps (ver. 1.4)
- 4 Heating, Ventilation, and AC Products
 - for Residential Ceiling Fans (ver. 3.0)
 - for Residential Ventilating Fans (ver. 3.2)
- 5 Other
 - For Water Coolers (ver. 3.0)

D- A NIST Designated Phase-I and Phase-II Conformity Assessment Body (CAB) for the following economies and regulatory authorities under the terms of the stated MRAs/Treaties:

- Australia: ACMA (Australian Communication and Media Authority) – APEC Tel MRA -Phase I;
- Canada: (Innovation, Science and Economic development Canada - ISEDC) Foreign Certification Body – FCB – APEC Tel MRA -Phase I & Phase II;
- Chinese Taipei (Republic of China – Taiwan):
 - o BSMI (Bureau of Standards, Metrology and Inspection) APEC Tel MRA -Phase I;
 - o NCC (National Communications Commission) APEC Tel MRA -Phase I;
- European Union:
 - o EMC Directive 2014/30/EU US-EU EMC & Telecom MRA CAB (NB)
 - o Radio Equipment (RE) Directive 2014/53/EU US-EU EMC & Telecom MRA CAB (NB)
 - o Low Voltage Directive (LVD) 2014/35/EU
- Hong Kong Special Administrative Region: (Office of the Telecommunications Authority – OFTA) APEC Tel MRA -Phase I & Phase II
- Israel – US-Israel MRA Phase I
- Republic of Korea (Ministry of Communications - Radio Research Laboratory) APEC Tel MRA -Phase I
- Singapore: (Infocomm Media Development Authority - IMDA) APEC Tel MRA -Phase I & Phase II;
- Japan: VCCI - Voluntary Control Council for Interference US-Japan Telecom Treaty VCCI Side Letter-
- USA:
 - o ENERGY STAR Recognized Test Laboratory – US EPA
 - o Telecommunications Certification Body (TCB) – US FCC;
 - o Nationally Recognized Test Laboratory (NRTL) – US OSHA
- Vietnam: APEC Tel MRA -Phase I;

2 EUT Test Configuration

2.1 Justification

The EUT was configured for testing according to ANSI C63.10-2013 and FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

The EUT was tested in a testing mode to represent worst-case results during the final qualification test.

The worst-case data rates are determined by measuring the average power, peak power and PPSD across all data rates bandwidths, and modulations.

2.2 EUT Exercise Software

The test software used was TeraTerm. The software is compliant with the standard requirements being tested against.

Please refer to the following power setting table.

5150MHz-5250MHz

Modulation	Frequency (MHz)	Power Setting
802.11a	5180	56
	5200	56
	5240	56
802.11n/ac20	5180	58
	5200	56
	5240	56
802.11n/ac40	5190	54
	5230	68
802.11ac80	5210	58

5250MHz-5350MHz

Modulation	Frequency (MHz)	Power Setting
802.11a	5260	68
	5280	68
	5320	60
802.11n/ac20	5260	68
	5280	68
	5320	60
802.11n/ac40	5270	68
	5310	50
802.11ac80	5290	47

5470MHz-5725MHz

Modulation	Frequency (MHz)	Power Setting
802.11a	5500	53
	5580	68
	5700	49
802.11n/ac20	5500	52
	5580	68
	5700	49
802.11n/ac40	5510	46
	5590	68
	5670	54
802.11ac80	5530	46
	5610	68

5725MHz-5850MHz

Modulation	Frequency (MHz)	Power Setting
802.11a	5745	68
	5785	68
	5825	68
802.11n/ac20	5745	68
	5785	68
	5825	68
802.11n/ac40	5755	68
	5795	68
802.11ac80	5775	68

*Data rates tested:

802.11a mode:

6 Mbps 802.11n/ac20 HT20/VHT20: MCS0

2.3 Duty Cycle Correction Factor

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 section B:


All measurements are to be performed with the EUT transmitting at 100% duty cycle at its maximum power control level; however, if 100% duty cycle cannot be achieved, measurements of duty cycle, x, and maximum-power transmission duration, T, are required for each tested mode of operation.

Radio Mode	On Time (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
802.11a	-	-	100%	0
802.11n/ac20	1.867	2.05	91%	0.40
802.11n/ac40	.8833	1.092	80%	0.96
802.11ac80	.420	.570	73%	1.3


Note: Duty Cycle Correction Factor = $10 \cdot \log(1/\text{duty cycle})$

Please refer to the following plots.


802.11a mode

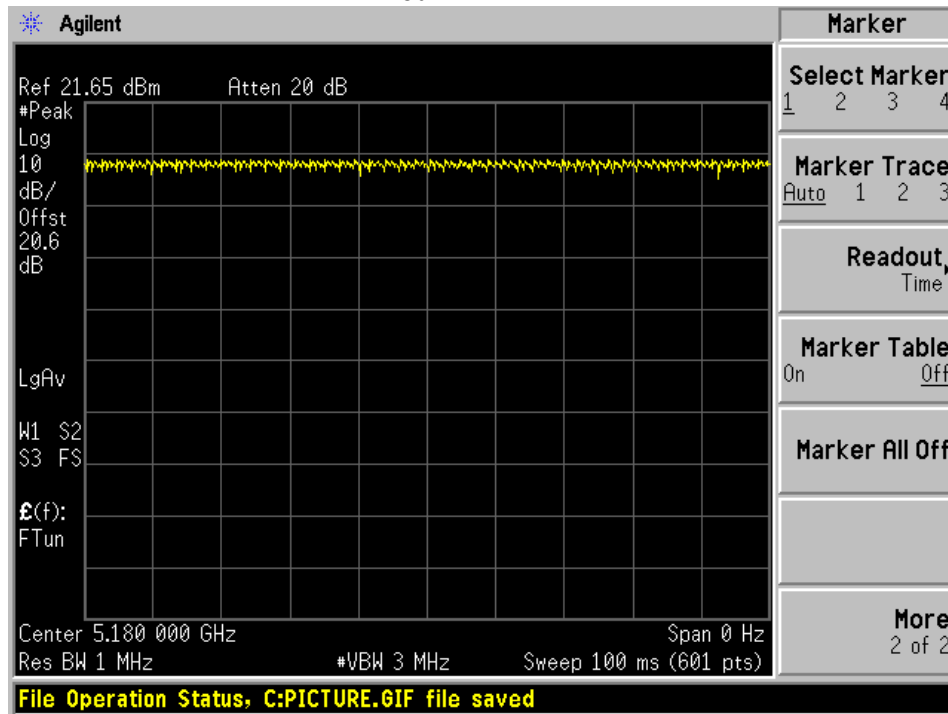


802.11n20/ac20 mode

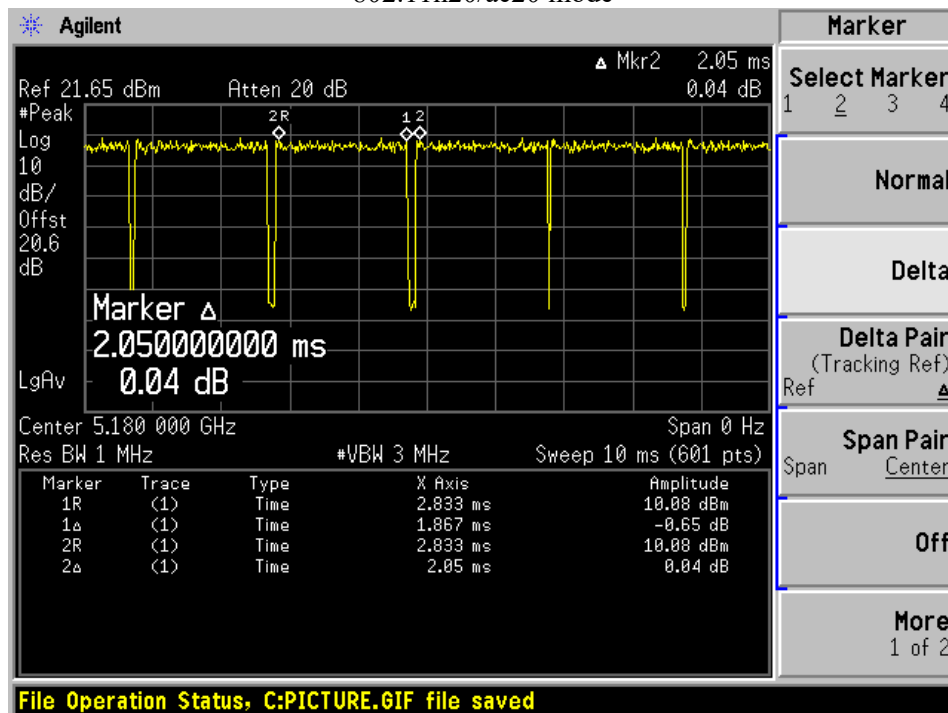

802.11n20/ac40 mode

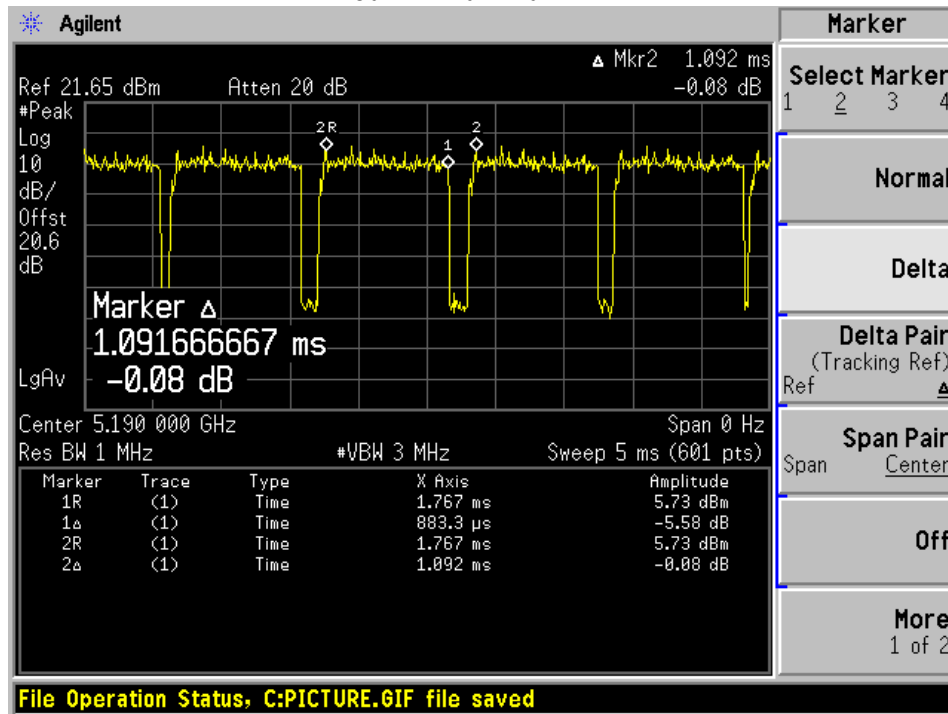

802.11ac80

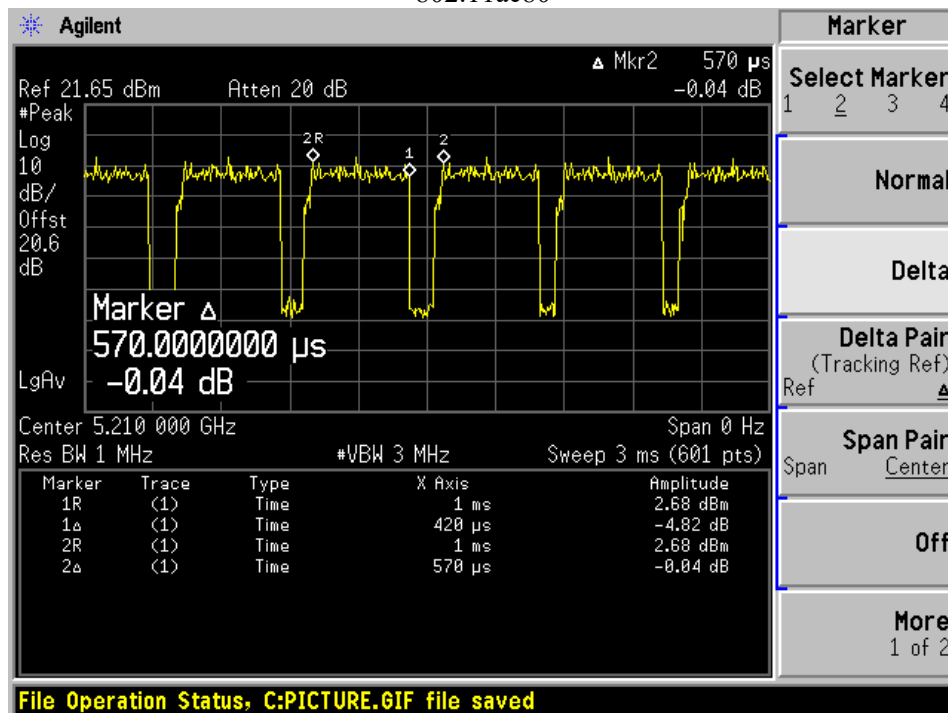

2.4 Equipment Modifications

N/A

2.5 Local Support Equipment

Manufacturer	Description	Model
Dell	Laptop	Latitude E6410
Dell	TV Monitor	S3221QS

2.6 Support Equipment

Manufacturer	Description	Model
Roku, Inc.	Debug Board	-

2.7 Interface Ports and Cabling

Cable Description	Length (m)	To	From
USB Cable	< 1 m	Laptop	EUT
HDMI Cable	0.5	EUT	Monitor
RF Cable	< 1 m	EUT	PSA

3 Summary of Test Results

FCC/ISED Rules	Description of Test	Result
FCC §2.1091, §15.407(f), ISED RSS-102	RF Exposure	Compliant
FCC §15.203 ISED RSS-Gen §6.8	Antenna Requirement	Compliant
FCC §15.207 ISED RSS-Gen §8.8	AC Power Line Conducted Emissions	Compliant
FCC §2.1053, §15.205, §15.209, 15.407(b) ISED RSS-247 §6.2	Spurious Radiated Emissions	Compliant
FCC §15.407(e) ISED RSS-Gen §6.2	Emission Bandwidth	Compliant
FCC §407(a) ISED RSS-247 §6.2	Output Power	Compliant
FCC §2.1051, §15.407(b) ISED RSS-247 §6.2	Band Edges	Compliant
FCC §15.407(a) ISED RSS-247 §6.2	Power Spectral Density	Compliant

BACL is responsible for all the information provided in this report, except when information is provided by the customer as identified in this report. Information provided by the customer, e.g., antenna gain, can affect the validity of results.

4 FCC §2.1091, §15.407(f) & ISEDC RSS-102 - RF Exposure

4.1 Applicable Standards

According to FCC KDB 447498 D04 Interim General RF Exposure Guidance v01, Section 2.1 RF Exposure Test Exemptions for Single Source,

2.1.1 General RF Exposure Test Exemption Considerations

RF exposure test exemptions provide means to obtain certification without the need of showing data (measurements, or analytical/numerical modeling) to demonstrate compliance. Hereafter, in this context, an RF source is referred to as “*exempt RF device*” in the sense that it is not required to show data demonstrating compliance to RF exposure limits.

Test exemptions apply for devices used in general population/uncontrolled exposure environments, according to the SAR-based, or MPE-based exemption thresholds.⁸ However, it is always possible, especially when the potential for exposure cannot be easily determined, that an RF exposure evaluation may become required according §§ 1.1307(c) and (d).

As detailed in Section 2.1.2, the 1 mW and SAR-based test exemption conditions are in terms of source-based available maximum time-averaged (matched conducted) output power for all operating configurations, adjusted for tune-up tolerance, and at the minimum *test separation distance* required for the particular RF exposure scenario under consideration. This minimum *test separation distance* is determined by the smallest distance from the antenna and radiating structures or outer surface of the device, according to the host form factor, exposure conditions and platform requirements, to any part of the body or extremity of a user or bystander. To qualify for SAR test exemption, the *test separation distances* applied must be fully explained and justified (typically in the SAR measurement, or SAR analysis report, according to KDB Pub. 865664) by showing the actual operating configurations and exposure conditions of the transmitter, and applicable host platform requirements (e.g., KDB Pubs. 648474, 616217, 941225)

When no other RF exposure testing or reporting is required, a statement of justification and compliance must be included in the equipment approval, in lieu of the SAR report, to qualify for SAR test exemption.

If RF exposure testing requirements for a specific device are covered in a KDB Publication, those requirements must be satisfied before applying any SAR test exemption provisions. For example, this is the case for handheld PTT two-way radios, handsets, laptops, and tablets, etc.⁹

Finally, when 10-g extremity SAR applies, SAR test exemption may be considered by applying a factor of 2.5 to the SAR-based exemption thresholds.

2.1.2 1-mW Test Exemption

Per §1.1307(b)(3)(i)(A), a single RF source is *exempt RF device* (from the requirement to show data demonstrating compliance to RF exposure limits, as previously mentioned) if the available maximum time-averaged power is no more than 1 mW, regardless of separation distance.

This exemption applies to all operating configurations and exposure conditions, for the frequency range 100 kHz to 100 GHz, regardless of fixed, mobile, or portable device exposure conditions. This is a standalone exemption, and it cannot be applied in conjunction with any other test exemption.

2.1.3 SAR-Based Exemption

A more comprehensive exemption, considering a variable power threshold that depends on both the *separation distance* and power, is provided in §1.1307(b)(3)(ii)(B). This exemption is applicable to the frequency range between 300 MHz and 6 GHz, with *test separation distances* between 0.5 cm and 40 cm, and for all RF sources in fixed, mobile, and portable device exposure conditions.

Accordingly, a RF source is considered an *RF exempt device* if its available maximum time-averaged (matched conducted) power or its effective radiated power (ERP), whichever is greater, are below a specified threshold. This exemption threshold was derived based on general population 1-g SAR requirements and is detailed in Appendix C.

2.1.4 MPE-Based Exemption

An alternative to the SAR-based exemption is provided in §1.1307(b)(3)(ii)(C), for a much wider frequency range, from 300 kHz to 100 GHz, applicable for separation distances greater or equal to $\lambda/2\pi$, where λ is the free-space operating wavelength in meters. The MPE-based test exemption condition is in terms of ERP, defined as the

⁸ Specific test exemption thresholds for operations under occupational/controlled limits are not established.

⁹ When SAR evaluation is required by the hotspot mode or UMPC mini-tablet procedures, that is, where an antenna is ≤ 2.5 cm from a surface or edge, the *test separation distance* from the phantom to the antenna or device enclosure, as appropriate, should be applied to determine SAR test exemption for such configurations, according to the criteria in this document. For that case, the *test separation distance* cannot be determined from the distance of the antenna to the device surface or edge.

According to ISED RSS-102 Issue 5 Section 2.5.1 Exemption Limits for Routine Evaluation-SAR Evaluation:

SAR evaluation is required if the separation distance between the user and/or bystander and the antenna and/or radiating element of the device is less than or equal to 20 cm, except when the device operates at or below the applicable output power level (adjusted for tune-up tolerance) for the specified separation distance defined in table below,

Frequency (MHz)	Exemption Limits (mW)				
	At separation distance of ≤ 5 mm	At separation distance of 10 mm	At separation distance of 15 mm	At separation distance of 20 mm	At separation distance of 25 mm
≤ 300	71	101	132	162	193
450	52	70	88	106	123
835	17	30	42	55	67
1900	7	10	18	34	60
2450	4	7	15	30	52
3500	2	6	16	32	55
5800	1	6	15	27	41

Frequency (MHz)	Exemption Limits (mW)				
	At separation distance of 30 mm	At separation distance of 35 mm	At separation distance of 40 mm	At separation distance of 45 mm	At separation distance of ≥ 50 mm
≤ 300	223	254	284	315	345
450	141	159	177	195	213
835	80	92	105	117	130
1900	99	153	225	316	431
2450	83	123	173	235	309
3500	86	124	170	225	290
5800	56	71	85	97	106

4.2 FCC RF Exposure Exemption Evaluation Procedures

According to FCC KDB 447498 D04 Interim General RF Exposure Guidance v01, Annex B Exemptions for Single Source,

B.1 General

This appendix provides the exemption criteria and summarizes relevant parameters and usage considerations based on descriptions in FCC 19-126.

B.2 Blanket 1 mW Blanket Exemption

The 1 mW Blanket Exemption of § 1.1307(b)(3)(i)(A) applies for single fixed, mobile, and portable RF sources with available maximum time-averaged power of no more than 1 mW, regardless of separation distance. The 1 mW blanket exemption applies at separation distances less than 0.5 cm, including where there is no separation. This exemption shall not be used in conjunction with other exemption criteria other than those for multiple RF sources in paragraph § 1.1307(b)(3)(ii)(A). The 1 mW exemption is independent of service type and covers the full range of 100 kHz to 100 GHz, but it shall not be used in conjunction with other exemption criteria or in devices with higher-power transmitters operating in the same time-averaging period. Exposure from such higher-power transmitters would invalidate the underlying assumption that exposure from the lower-power transmitter is the only contributor to SAR in the relevant volume of tissue.

B.3 MPE-based Exemption

General frequency and separation-distance dependent MPE-based effective radiated power (ERP) thresholds are in Table B.1 [Table 1 of § 1.1307(b)(1)(i)(C)] to support an exemption from further evaluation from 300 kHz through 100 GHz.

Table B.1 – THRESHOLD FOR SINGLE RF SOURCE SUBJECT TO ROUTINE ENVIRONMENTAL EVALUATION

RF Source			Minimum Distance			Threshold ERP
f_L MHz		f_H MHz	$\lambda_L/2\pi$		$\lambda_H/2\pi$	W
0.3	-	1.34	159 m	-	35.6 m	1,920 R ²
1.34	-	30	35.6 m	-	1.6 m	3,450 R ² / f^2
30	-	300	1.6 m	-	159 mm	3.83 R ²
300	-	1,500	159 mm	-	31.8 mm	0.0128 R ² f
1,500	-	100,000	31.8 mm	-	0.5 mm	19.2 R ²

Subscripts L and H are low and high; λ is wavelength.
From § 1.1307(b)(3)(i)(C), modified by adding Minimum Distance columns.

The table applies to any RF source (i.e., single fixed, mobile, and portable transmitters) and specifies power and distance criteria for each of the five frequency ranges used for the MPE limits. These criteria apply at separation distances from any part of the radiating structure of at least $\lambda/2\pi$. The thresholds are based on the general population MPE limits with a single perfect reflection, outside of the reactive near-field, and in the main beam of the radiator.

For mobile devices that are not exempt per Table B.1 [Table 1 of § 1.1307(b)(1)(i)(C)] at distances from 20 cm to 40 cm and in 0.3 GHz to 6 GHz, evaluation of compliance with the exposure limits in § 1.1310 is necessary if the ERP of the device is greater than ERP_{20cm} in Formula (B.1) [repeated from § 2.1091(c)(1) and § 1.1307(b)(1)(i)(B)].

$$P_{th} \text{ (mW)} = ERP_{20 \text{ cm}} \text{ (mW)} = 2040f \quad 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz}$$

$$P_{th} \text{ (mW)} = ERP_{20 \text{ cm}} \text{ (mW)} = 3060 \quad 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz}$$
(B.1)

If the ERP is not easily obtained, then the available maximum time-averaged power may be used (i.e., without consideration of ERP only if the physical dimensions of the radiating structure(s) do not exceed the electrical length of $\lambda/4$ or if the antenna gain is less than that of a half-wave dipole.

SAR-based exemptions are constant at separation distances between 20 cm and 40 cm to avoid discontinuities in the threshold when transitioning between SAR-based and MPE-based exemption criteria at 40 cm, considering the importance of reflections.

B.4 SAR-based Exemption

SAR-based thresholds are derived based on frequency, power, and separation distance of the RF source. The formula defines the thresholds in general for either available maximum time-averaged power or maximum time-averaged ERP, whichever is greater.

If the ERP of a device is not easily determined, such as for a portable device with a small form factor, the applicant may use the available maximum time-averaged power exclusively if the device antenna or radiating structure does not exceed an electrical length of $\lambda/4$.

As for devices with antennas of length greater than $\lambda/4$ where the gain is not well defined, but always less than that of a half-wave dipole (length $\lambda/2$), the available maximum time-averaged power generated by the device may be used in place of the maximum time-averaged ERP, where that value is not known.

The separation distance is the smallest distance from any part of the antenna or radiating structure for all persons, during operation at the applicable ERP. In the case of mobile or portable devices, the separation distance is from the outer housing of the device where it is closest to the antenna.

The SAR-based exemption formula of § 1.1307(b)(3)(i)(B), repeated here as Formula (B.2), applies for single fixed, mobile, and portable RF sources with available maximum time-averaged power or effective radiated power (ERP), whichever is greater, of less than or equal to the threshold P_{th} (mW).

This method shall only be used at separation distances from 0.5 cm to 40 cm and at frequencies from 0.3 GHz to 6 GHz (inclusive). P_{th} is given by Formula (B.2).

$$P_{th} \text{ (mW)} = ERP_{20 \text{ cm}} (d/20 \text{ cm})^x \quad d \leq 20 \text{ cm}$$

$$P_{th} \text{ (mW)} = ERP_{20 \text{ cm}} \quad 20 \text{ cm} < d \leq 40 \text{ cm}$$
(B.2)

Where

$$x = -\log_{10} (60/(ERP_{20 \text{ cm}} \sqrt{f}))$$

and f is in GHz, d is the separation distance (cm), and $EPR_{20\text{cm}}$ is per Formula (B.1).

The example values shown in Table B.2 are for illustration only.

Table B.2 – Example Power Thresholds (mW)

Frequency (MHz)	Distance (mm)										
	5	10	15	20	25	30	35	40	45	50	
300	39	65	88	110	129	148	166	184	201	217	
450	22	44	67	89	112	135	158	180	203	226	
835	9	25	44	66	90	116	145	175	207	240	
1900	3	12	26	44	66	92	122	157	195	236	
2450	3	10	22	38	59	83	111	143	179	219	
3600	2	8	18	32	49	71	96	125	158	195	
5800	1	6	14	25	40	58	80	106	136	169	

4.3 RF exposure evaluation exemption for FCC

Prediction frequency (GHz)		5.795		
Maximum output power (dBm)		18.7		
Maximum ERP (dBm)		21.73		
Maximum ERP (mW)		148.94		
Prediction distance (cm)		20		
Maximum antenna gain (dBi)		5.18		
0.3 GHz $\leq f <$ 1.5 GHz	$ERP_{20\text{ cm}}$ (mW)	x	SAR-based Exemption Threshold	
	-	-	$d \leq 20\text{ cm}$	P_{th} (mW)
			-	-
	-	-	$20\text{ cm} < d \leq 40\text{ cm}$	P_{th} (mW)
-			-	
1.5 GHz $\leq f \leq$ 6 GHz	$ERP_{20\text{ cm}}$ (mW)	x	SAR-based Exemption Threshold	
	3060	-	$d \leq 20\text{ cm}$	P_{th} (mW)
			-	-
	3060	-	$20\text{ cm} < d \leq 40\text{ cm}$	P_{th} (mW)
3060			3060	

As shown in the table above, the EUT's Max ERP is lower than the SAR-based Exemption Threshold. SAR testing for this device is exempted.

4.4 RF exposure evaluation exemption for IC

Maximum EIRP = 18.7 dBm + 5.18dBi = 23.88 dBm (0.244 W), which is less $1.31 \times 10^{-2} f^{0.6834} = 4.89\text{ W} = 36.89\text{ dBm}$. Therefore, ISED SAR testing is not required.

5 FCC §15.203 & ISEDC RSS-Gen §6.8 - Antenna Requirements

5.1 Applicable Standards

According to FCC §15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to FCC §15.247 (b) (4), if transmitting antennas of directional gain greater than 6 dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to ISEDC RSS-Gen §6.8: Transmitter Antenna

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

5.2 Antenna List

Radio	Frequency Range (MHz)	Maximum Antenna Gain (dBi)
5 GHz Wi-Fi	5150-5850	5.18

Note: The antennas used by the EUT are permanent attached antennas.

Note: Antenna used is a Chip Antenna.

Note: Antenna info is information provided by customer.

6 FCC §15.207 & ISEDC RSS-Gen §8.8 - AC Power Line Conducted Emissions

6.1 Applicable Standards

As per FCC §15.207 and ISEDC RSS GEN §8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56 ^{Note1}	56 to 46 ^{Note2}
0.5-5	56	46
5-30	60	50

Note1: Decreases with the logarithm of the frequency.

Note2: A linear average detector is required

6.2 Test Setup

The measurement was performed at shield room, using the setup per ANSI C63.10-2013 measurement procedure. The specification used was FCC §15.207 limits and and ISEDC RSS GEN §8.8.

External I/O cables were draped along the edge of the test table and bundle when necessary.

The AC/DC power adapter of the EUT was connected with LISN-1 which provided 120 V / 60 Hz AC power.


6.3 Test Procedure

During the conducted emissions test, the power cord of the EUT host system was connected to the mains outlet of the LISN-1 and the power cords of support equipment were connected to LISN-2.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the peak, quasi-peak, and average detection mode. Quasi-Peak readings are distinguished with a "QP." Average readings are distinguished with an "Ave".

6.4 Test Setup Block Diagram

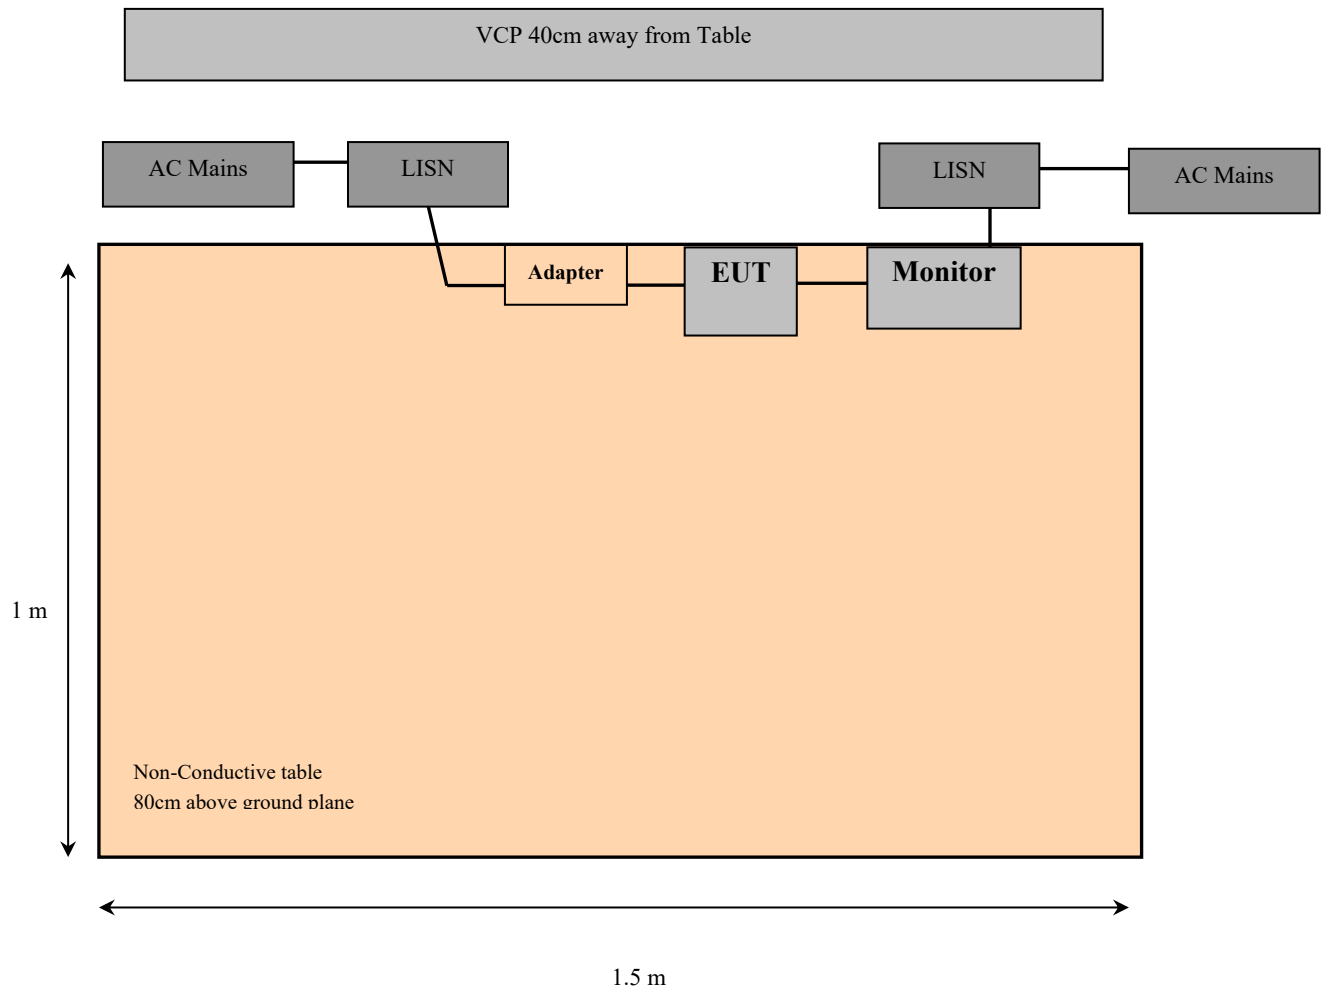

6.5 Corrected Amplitude and Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Correction Factor (CF) to indicated Amplitude (Ai) reading. The basic equation is as follows:

$$CA = A_i + CF$$

For example, a corrected amplitude of 46.2 dBuV = Indicated Reading (32.5 dBuV) + Correction Factor (13.7 dB)

The Correction Factor is calculated by adding Cable loss (CL), LISN calibration factor, and attenuation of the impulse limiter and the high pass filter. The basic equation is as follows:

$$CF = CL + \text{LISN calibration factor} + \text{Attenuation}$$

For example, a corrected amplitude of 46.2 dBuV = Indicated Reading (32.5 dBuV) + Cable Loss (3.5 dB) + LISN calibration factor (0.2 dB) + Attenuator (10 dB)

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

6.6 Test Equipment List and Details

BACL No.	Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Interval
124	Rohde & Schwarz	Receiver, EMI Test	ESCI 1166.5950K03	100044	2021-05-14	2 years
681	Rohde & Schwarz	Impulse Limiter	ESH3-Z2	101962	2021-11-30	1 year
725	Solar Electronics Company	High Pass Filter	Type 7930-100	7930150203	2022-03-18	1 year
732	FCC	LISN	FCC-LISN-50-25-2-10-CISPR16	160129	2021-11-24	1 year
1187	Fairview Microwave	Coaxial Cable	PE3C2220-1250CM	1	2021-09-08	1 year
-	Vasona	Test software	V6.0 build 11	10400213	N/R	N/R

Statement of Traceability: *BACL Corp.* attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 “A2LA Policy on Metrological Traceability”.

6.7 Test Environmental Conditions

Temperature:	20° C
Relative Humidity:	55 %
ATM Pressure:	102.1 kPa

The testing was performed by Weishan Zhang on 2022-08-04 in the Ground Plane test site.


6.8 Summary of Test Results

According to the recorded data in following table, the EUT complied with the FCC Part 15 and RSS-Gen standards'conducted emissions limits, with the margin reading of:

Connection: AC/DC adapter connected to 120 V/60 Hz, AC			
Margin (dB)	Frequency (MHz)	Conductor Mode (Line/Neutral)	Range (MHz)
-2.73	0.48979	Line	0.15-30


6.9 Conducted Emissions Test Plots and Data

120 V, 60 Hz – Line

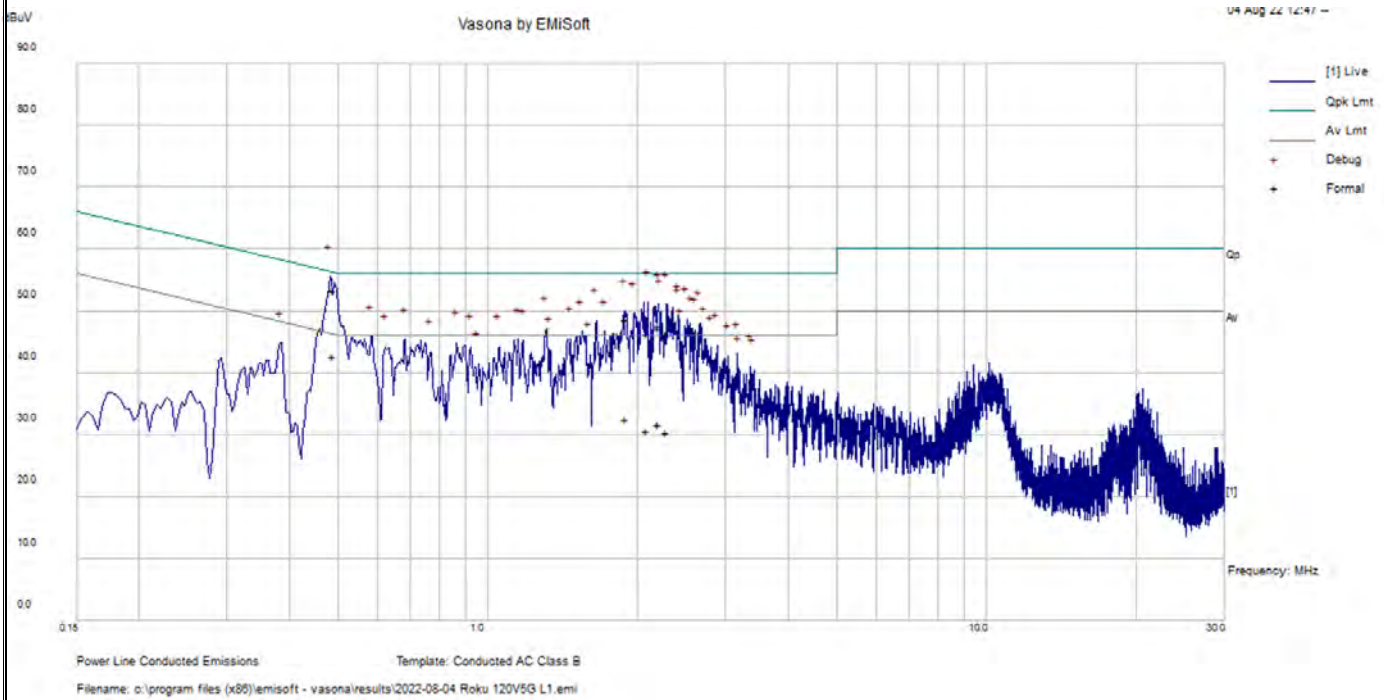

Frequency (MHz)	Ai. Reading (dBμV)	Correction Factor (dB)	Corrected Amplitude (dBμV)	Limit (dBμV)	Margin (dB)	Detector
0.48979	43.03	10.42	53.45	56.17	-2.73	QP
2.083564	36.13	10.14	46.27	56	-9.73	QP
2.204318	37.53	10.12	47.65	56	-8.35	QP
2.277452	36.21	10.12	46.33	56	-9.67	QP
2.206259	37.11	10.12	47.23	56	-8.77	QP
1.892931	38.64	10.13	48.77	56	-7.23	QP
0.48979	32.28	10.41	42.69	46.17	-3.48	Ave
2.083564	20.54	10.13	30.67	46	-15.33	Ave
2.204318	21.56	10.12	31.68	46	-14.32	Ave
2.277452	20.37	10.12	30.49	46	-15.51	Ave
2.206259	21.61	10.11	31.72	46	-14.28	Ave
1.892931	22.42	10.13	32.55	46	-13.45	Ave

120 V, 60 Hz – Neutral

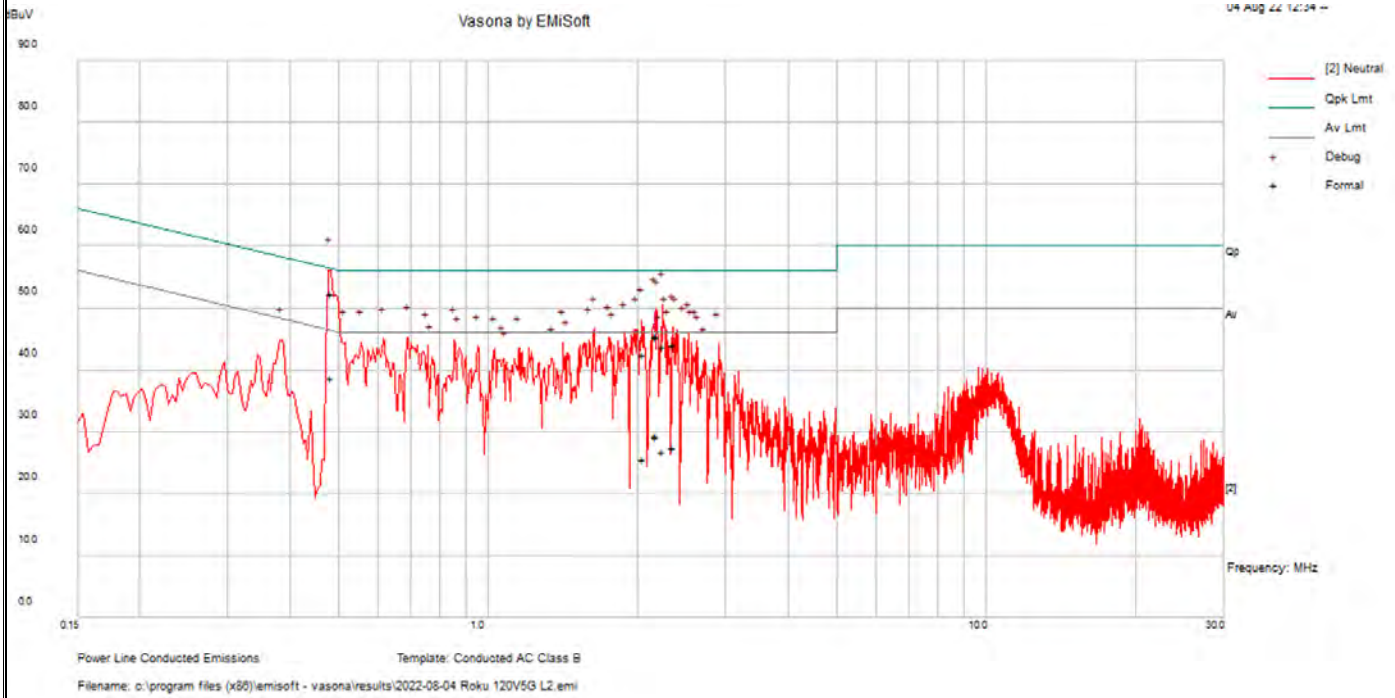

Frequency (MHz)	Ai. Reading (dBuV)	Correction Factor (dB)	Corrected Amplitude (dBµV)	Limit (dBµV)	Margin (dB)	Detector
0.483418	41.91	10.42	52.33	56.28	-3.95	QP
2.243798	33.72	10.11	43.83	56	-12.17	QP
2.179428	35.37	10.13	45.5	56	-10.5	QP
2.16925	35.11	10.13	45.24	56	-10.76	QP
2.049798	32.38	10.13	42.51	56	-13.49	QP
2.358168	33.86	10.11	43.97	56	-12.03	QP
0.483418	28.28	10.42	38.7	46.28	-7.58	Ave
2.243798	16.63	10.12	26.75	46	-19.25	Ave
2.179428	19.13	10.13	29.26	46	-16.74	Ave
2.16925	19.02	10.13	29.15	46	-16.85	Ave
2.049798	15.41	10.13	25.54	46	-20.46	Ave
2.358168	17.23	10.11	27.34	46	-18.66	Ave

7 FCC §15.209, §15.407(b) & ISEDC RSS-247 §6.2 - Spurious Radiated Emissions

7.1 Applicable Standard

As Per FCC §15.205(a) except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	960 – 1240	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	1300 – 1427	5.35 – 5.46
2.1735 – 2.1905	25.5 – 25.67	1435 – 1626.5	7.25 – 7.75
4.125 – 4.128	37.5 – 38.25	1645.5 – 1646.5	8.025 – 8.5
4.17725 – 4.17775	73 – 74.6	1660 – 1710	9.0 – 9.2
4.20725 – 4.20775	74.8 – 75.2	1718.8 – 1722.2	9.3 – 9.5
6.215 – 6.218	108 – 121.94	2200 – 2300	10.6 – 12.7
6.26775 – 6.26825	123 – 138	2310 – 2390	13.25 – 13.4
6.31175 – 6.31225	149.9 – 150.05	2483.5 – 2500	14.47 – 14.5
8.291 – 8.294	156.52475 – 156.52525	2690 – 2900	15.35 – 16.2
8.362 – 8.366	156.7 – 156.9	3260 – 3267	17.7 – 21.4
8.37625 – 8.38675	162.0125 – 167.17	3.332 – 3.339	22.01 – 23.12
8.41425 – 8.41475	167.72 – 173.2	3.3458 – 3.358	23.6 – 24.0
12.29 – 12.293	240 – 285	3.600 – 4.400	31.2 – 31.8
12.51975 – 12.52025	322 – 335.4		36.43 – 36.5
12.57675 – 12.57725	399.9 – 410		Above 38.6
13.36 – 13.41	608 – 614		

As per FCC §15.209: The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100 Note 1	3
88 - 216	150 Note 1	3
216 - 960	200 Note 1	3
Above 960	500	3

Note 1: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As per FCC Part 15.407 (b)

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47 -5.725 GHz band: All emissions outside of the 5.47-5725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.
- (7) The provisions of §15.205 apply to intentional radiators operating under this section.

As per ISSED RSS-247 §6.2

For transmitters operating in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. However, any unwanted emissions that fall into the band 5250- 5350 MHz must be 26 dBc, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth, above 5.25 GHz. Otherwise, the transmission is considered as intentional and the devices shall implement dynamic frequency selection (DFS) and transmitter power control (TPC) as per the requirements for the band 5250-5350 MHz

For devices with both operating frequencies and channel bandwidths contained within the band 5250-5350 MHz, the device shall comply with the following:

1. All emissions outside the band 5250-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. if the equipment is intended for outdoor use; or
2. All emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. and any emissions within the band 5150-5250 MHz shall meet the power spectral density limits of Section 6.2.1. The device shall be labelled "for indoor use only."

For devices with operating frequencies in the band 5250-5350 MHz but having a channel bandwidth that overlaps the band 5150-5250 MHz, the devices' unwanted emission shall not exceed -27 dBm/MHz e.i.r.p. outside the band 5150-5350 MHz and its power shall comply with the spectral power density for operation within the band 5150-5250 MHz. The device shall be labelled "for indoor use only."

For transmitters operating in the band 5470-5725 MHz, emissions outside the band shall not exceed -27 dBm/MHz e.i.r.p.

For the band 5725-5850 MHz, emissions at frequencies from the band edges to 10 MHz above or below the band edges shall not exceed -17 dBm/MHz e.i.r.p. For emissions at frequencies more than 10 MHz above or below the band edges, the emissions power shall not exceed -27 dBm/MHz.

7.2 Test Setup

The radiated emissions tests were performed in the 5-meter Chamber, using the setup in accordance with ANSI C63.10-2013. The specification used was the FCC 15.407 and ISEDC RSS-247 limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle when necessary.

7.3 Test Procedure

For the radiated emissions test, the EUT host, and all support equipment power cords were connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The EUT is set 3 meter away from the testing antenna, which is varied from 1-4 meter, and the EUT is placed on a turntable, which is 0.8 meter or 1.5 meter above ground plane, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna should be changed the polarization both of horizontal and vertical.

The spectrum analyzer or receiver is set as:

Below 1000 MHz:

$$\text{RBW} = 100 \text{ kHz} / \text{VBW} = 300 \text{ kHz} / \text{Sweep} = \text{Auto}$$

Above 1000 MHz:

- (1) Peak: RBW = 1MHz / VBW = 3MHz / Sweep = 100ms
- (2) Average: RBW = 1MHz / VBW = 10Hz / Sweep = Auto

7.4 Corrected Amplitude and Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) to indicated Amplitude (Ai) reading. The basic equation is as follows:

$$\text{CA} = \text{Ai} + \text{AF} + \text{CL} + \text{Atten} - \text{Ga}$$


For example, a corrected amplitude of 40.3 dBuV/m = Indicated Reading (32.5 dBuV) + Antenna Factor (+23.5dB) + Cable Loss (3.7 dB) + Attenuator (10 dB) - Amplifier Gain (29.4 dB)

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit for Class A. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$


7.5 Test Setup Block Diagram

Below 1GHz:

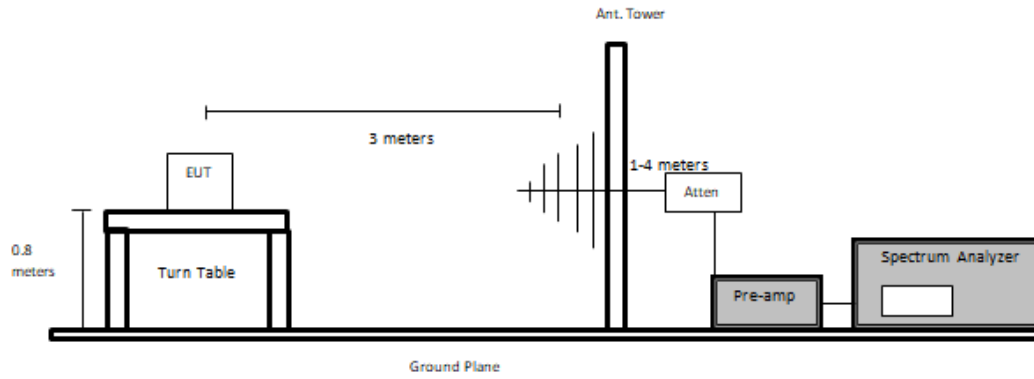


Above 1GHz:

Using Asset #1192

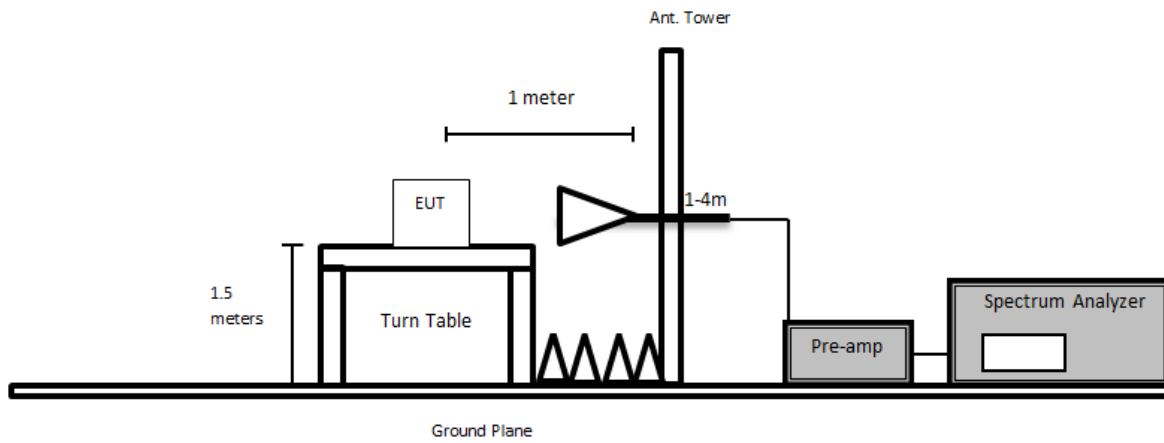

Using Asset #91,#92

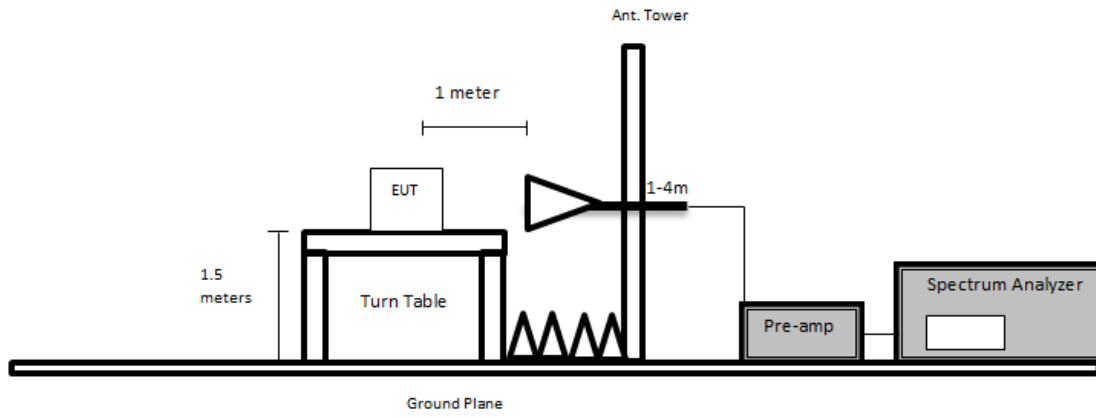

7.6 Test Equipment List and Details

BACL No.	Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
655	Rohde & Schwarz	Signal Analyzer	FSQ26	200749	2022-02-07	2 years
-	Sunol Science Corp	System Controller	SC110V	122303-1	N/R	N/A
310	Rohde & Schwarz	Receiver, EMI Test	ESCI 1166.5950.03	G132150 CM53511 19	2021-04-05	2 years
658	HP	Pre-Amplifier	8449B	3008A01 103	2022-07-22	1 year
459	HP	Pre Amplifier	8447D	2443A04 374	2021-11-02	1 year
827	AH Systems	Preamplifier	PAM 1840 VH	170	2021-09-03	1 year
1192	ETS Lindgren	Horn Antenna	3117	00218973	2021-09-14	2 years
321	Sunol Sciences	Biconilog Antenna	JB3	A020106-2	2021-11-22	2 years
91	Wisewave	Antenna, Horn	ARH-4223-02	10555-02	2022-03-08	2 years
92	Wisewave	Antenna, Horn	ARH-2823-02	10555-01	2022-03-17	2 years
-	-	RF cable	-	-	Each time ¹	N/A
-	-	Notch Filter	-	-	Each time ¹	N/A
-	-	20dB attenuator	-	-	Each time ¹	N/A
1077	Insulated Wire Corp.	157 Series 2.92 SM (x2) Armored 33 ft. Cable	KPS-1571AN-3960-KPS	DC 1917	2022-03-03	1 year
1228	Pasternack	Coaxial Cable, RG213	PE3496-800CM	2111301	2021-11-30	1 year
	Vasona	Test software	V6.0 build 11	10400213	N/R	N/R

Note¹: equipment included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 "A2LA Policy on Metrological Traceability".

7.7 Test Environmental Conditions

Temperature:	20-22 °C
Relative Humidity:	42-50 %
ATM Pressure:	102.7 kPa

The testing was performed by Deepak Mishra from 2022-07-07 to 2022-08-03 in 5m chamber 3.

7.8 Summary of Test Results

According to the data hereinafter, the EUT complied with the FCC Part 15.407 and RSS-247 standards' radiated emissions limits, and had the worst margin of:


Mode: Transmitting			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Mode, Channel
-0.107	5150	Horizontal	802.11ac80 mode, 5210 MHz

7.9 Radiated Emissions Test Result Data

Note: Pre-scan was performed in order to determine worst-case orientation of device with respect to measurement antenna. Plots/data shown represent measurements made in worst-case orientation.

1) 30 MHz – 1 GHz at 3 meters

Worst Case: 802.11n/ac40, 5190 MHz

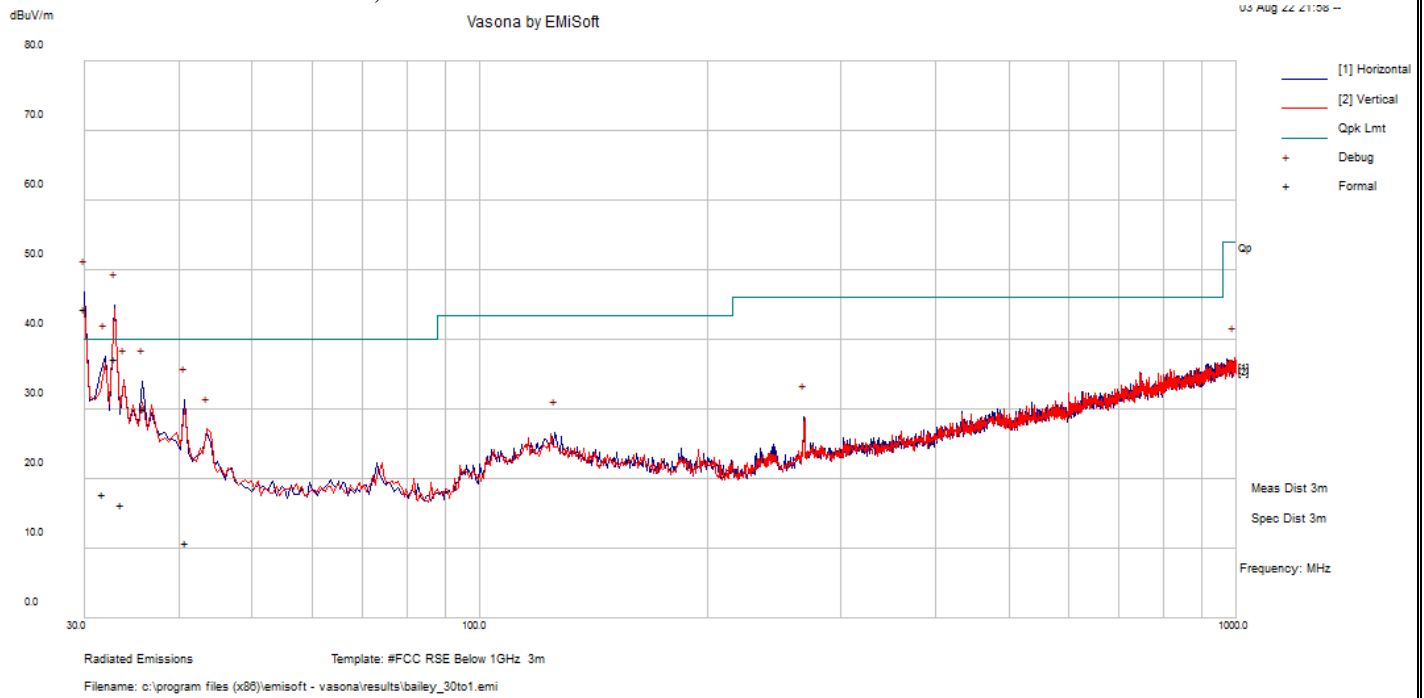

Frequency (MHz)	S.A. Reading (dBUV)	Correction Factor (dB/m)	Corrected Amplitude (dBµV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBµV/m)	Margin (dB)	Comment
30	43.52	-10.36	33.16	139	H	298	40	-6.84	QP
32.979	49.98	-12.68	37.3	105	H	49	40	-2.7	QP
31.752	29.49	-11.76	17.73	272	H	280	40	-22.27	QP
33.64625	29.54	-13.29	16.25	280	H	90	40	-23.75	QP
36.0425	45.19	-15.06	30.13	105	H	51	40	-9.87	QP
40.90025	29.65	-18.89	10.76	138	H	337	40	-29.24	QP

FCC/IC Limits for 1 GHz to 40 GHz				
Applicability	(dBm)	(uV/m at 3meters)	(dBuV/m at 3meters)	(dBuV/m at 1meter) ²
Restricted Band Average Limit	-	500	54	64
Restricted Band Peak Limit ¹	-	-	74	84
FCC §15.407(b) & ISEDC RSS-247 §6.2 Defined Unwanted Emissions Limit	-27	-	68	78

Note¹: Restricted Band Peak Limit is defined to be 20dB higher than Average Limit.

Note²: Limits at 1 meter are determined by applying a Distance correction factor accounts for extrapolation from 1 meters to 3 meters. Formula used is as follows: $20 \cdot \log(3\text{meters}/1\text{meter}) = 9.54$ (According to ANSI C63.10-2013 Section 9.4)

Note³: Where Restricted Band Peak Limit is replaced with stricter 78 dB μ V/m at 1 meter, compliance is being shown for unwanted emissions per FCC §15.407(b) & ISEDC RSS-247 §6.2

2) 1 – 18 GHz, Band Edges, Harmonics & Emission Masks measured at 1 meter

5150 - 5250 MHz

802.11a mode

Frequency (MHz)	S.A. Reading (dB μ V)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dB μ V/m)	FCC/IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dB μ V/m)	Margin (dB)	
Low Channel: 5180 MHz											
5150	66.870	71	150	H	35.532	8.94	36.82	74.526	78	-3.474	Peak
5150	52.487	71	150	H	35.532	8.94	36.82	60.143	64	-3.857	Ave
10360	49.250	0	150	H	38.148	12.87	36.57	63.699	78	-14.301	Peak
10360	37.954	0	150	H	38.148	12.87	36.57	52.403	64	-11.597	Ave
15540	49.950	0	150	H	41.071	16.03	34.82	72.235	84	-11.766	Peak
15540	38.588	0	150	H	41.071	16.03	34.82	60.873	64	-3.127	Ave
Middle Channel: 5220 MHz											
10440	49.000	360	150	H	38.14	12.78	36.57	63.361	78	-14.639	Peak
10440	37.738	360	150	H	38.14	12.78	36.57	52.099	64	-11.901	Ave
15660	49.660	360	123	H	41.07	16.17	35.35	71.549	84	-12.451	Peak
15660	39.197	360	123	H	41.07	16.17	35.35	61.086	64	-2.914	Ave
High Channel: 5240 MHz											
10480	49.410	85	117	H	38.14	12.91	36.46	64.008	78	-13.992	Peak
10480	38.057	85	117	H	38.14	12.91	36.46	52.655	64	-11.345	Ave
15720	49.800	89	150	H	41.07	16.48	36.16	71.182	84	-12.818	Peak
15720	38.580	89	150	H	41.07	16.48	36.16	59.962	64	-4.038	Ave

5150 - 5250 MHz

802.11ac20/n20 mode

Frequency (MHz)	S.A. Reading (dB μ V)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dB μ V/m)	FCC/IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dB μ V/m)	Margin (dB)	
Low Channel: 5180 MHz											
5150	65.340	61	150	H	35.532	9.686	38.14	72.416	78	-5.584	Peak
5150	50.756	61	150	H	35.532	9.686	38.14	57.832	64	-6.168	Ave
10360	47.580	170	218	H	38.148	12.87	36.57	62.029	78	-15.971	Peak
10360	34.996	170	218	H	38.148	12.87	36.57	49.445	64	-14.555	Ave
15540	49.330	256	150	H	41.071	16.03	34.82	71.615	84	-12.386	Peak
15540	36.856	256	150	H	41.071	16.03	34.82	59.140	64	-4.860	Ave
Middle Channel: 5200 MHz											
10440	47.510	253	107	H	38.148	12.78	36.57	61.871	78	-16.129	Peak
10440	35.176	253	107	H	38.148	12.78	36.57	49.537	64	-14.463	Ave
15660	48.590	91	252	H	41.071	16.17	35.35	70.479	84	-13.521	Peak
15660	36.586	91	252	H	41.071	16.17	35.35	58.475	64	-5.525	Ave
High Channel: 5240 MHz											
10480	47.030	69	127	H	38.148	12.91	36.46	61.628	78	-16.372	Peak
10480	37.686	69	127	H	38.148	12.91	36.46	52.284	64	-11.716	Ave
15720	48.720	68	203	H	41.071	16.48	36.16	70.102	84	-13.898	Peak
15720	39.126	68	203	H	41.071	16.48	36.16	60.508	64	-3.492	Ave

5150 - 5250 MHz

802.11ac40/n40 mode

Frequency (MHz)	S.A. Reading (dB μ V)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dB μ V/m)	FCC/IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dB μ V/m)	Margin (dB)	
Low Channel: 5190 MHz											
5150.00	68.930	52	150	H	35.532	8.944	36.82	76.586	78	-1.414	Peak
5150.00	53.934	52	150	H	35.532	8.944	36.82	61.590	78	-16.410	Ave
10380.0	47.590	224	279	H	38.148	12.79	36.57	61.956	78	-16.044	Peak
10380.0	38.344	224	279	H	38.148	15.85	36.57	55.770	64	-8.230	Ave
15570.0	49.230	236	298	H	41.071	16.07	35.35	71.023	84	-12.977	Peak
15570.0	37.184	236	298	H	41.071	16.07	35.35	58.977	64	-5.023	Ave
High Channel: 5230 MHz											
10460	46.700	58	163	H	38.148	13.00	36.36	61.493	78	-16.507	Peak
15690	35.324	58	163	H	38.148	13.00	36.36	50.117	64	-13.883	Ave
15690	48.430	130	153	H	41.071	16.33	36.16	69.666	84	-14.334	Peak

5150 - 5250 MHz

802.11ac80 mode

Frequency (MHz)	S.A. Reading (dB μ V)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dB μ V/m)	FCC/IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dB μ V/m)	Margin (dB)	
Low Channel: 5210 MHz											
5150.00	70.300	63	146	H	35.532	8.944	36.88	77.893	78	-0.107	Peak
5150.00	55.509	63	146	H	35.532	8.944	36.88	63.102	64	-0.898	Ave
10420.00	46.960	68	298	H	38.148	12.86	36.57	61.393	78	-16.607	Peak
10420.00	35.165	68	298	H	38.148	12.86	36.57	49.598	64	-14.402	Ave

5250 - 5350 MHz

802.11a mode

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dBμV/m)	FCC/IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel: 5260											
10520.0	47.800	81	305	H	38.19	12.93	36.46	62.457	78	-15.543	Peak
10520.0	35.129	81	305	H	38.19	12.93	36.46	49.786	64	-14.214	Ave
15780.0	49.620	360	282	H	41.59	16.44	36.87	70.785	84	-13.215	Peak
15780.0	36.349	360	282	H	41.59	16.44	36.87	57.514	64	-6.486	Ave
Middle Channel: 5280 MHz											
10560	47.450	209	218	H	38.19	13.06	36.36	62.346	78	-15.654	Peak
10560	34.909	209	218	H	38.19	13.06	36.36	49.805	64	-14.195	Ave
15840	49.390	232	143	H	41.59	16.55	36.87	70.660	84	-13.340	Peak
15840	36.829	232	143	H	41.59	16.55	36.87	58.099	64	-5.901	Ave
High Channel: 5320 MHz											
5350	70.150	84	150	H	35.24	9.06	36.64	77.815	78	-0.185	Peak
5350	54.799	84	150	H	35.24	9.06	36.64	62.464	64	-1.536	Ave
10640	48.140	360	186	H	38.19	13.13	36.36	63.110	84	-20.890	Peak
10640	35.349	360	186	H	38.19	13.13	36.36	50.319	64	-13.681	Ave
15960	48.390	359	150	H	41.59	16.55	37.09	69.438	84	-14.562	Peak
15960	35.439	359	150	H	41.59	16.55	37.09	56.487	64	-7.513	Ave

5250 - 5350 MHz

802.11ac20/n20 mode

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dBμV/m)	FCC/IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel: 5260 MHz											
10520.0	48.020	26	176	H	38.194	12.93	36.46	62.677	78	-15.323	Peak
10520.0	34.650	26	176	H	38.194	12.93	36.46	49.307	64	-14.693	Ave
Middle Channel: 5280 MHz											
10560.0	47.810	203	274	H	38.194	13.06	36.36	62.706	78	-15.294	Peak
10560.0	35.200	203	274	H	38.194	13.06	36.36	50.096	64	-13.904	Ave
High Channel: 5320 MHz											
5350.00	69.580	59	150	H	35.242	9.068	36.64	77.245	78	-0.755	Peak
5350.00	55.464	59	150	H	35.242	9.068	36.64	63.129	64	-0.871	Ave
10640.0	48.040	225	100	H	38.194	13.139	36.36	63.010	84	-20.990	Peak
10640.0	35.770	225	100	H	38.194	13.139	36.36	50.740	64	-13.260	Ave

5250 - 5350 MHz

802.11ac40/n40 mode

Frequency (MHz)	S.A. Reading (dBµV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dBµV/m)	FCC/IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBµV/m)	Margin (dB)	
Low Channel: 5270 MHz											
10540.0	46.37	84	176	H	38.19	12.98	36.46	61.081	78	-16.919	Peak
10540.0	34.31	84	176	H	38.19	12.98	36.46	49.029	64	-14.971	Ave
High Channel: 5310 MHz											
5350.00	69.280	59	150	H	35.242	9.068	36.645	76.945	78	-1.055	Peak
5350.00	54.847	59	150	H	35.242	9.068	36.645	62.512	64	-1.488	Ave
10620.0	48.310	210	290	H	38.194	13.166	36.363	63.307	84	-20.693	Peak
10620.0	36.578	210	290	H	38.194	13.166	36.363	51.575	64	-12.425	Ave

5250 - 5350 MHz

802.11ac80 mode

Frequency (MHz)	S.A. Reading (dBµV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dBµV/m)	FCC/IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBµV/m)	Margin (dB)	
High Channel: 5290 MHz											
5350.00	70.070	65	131	H	35.242	9.06	36.71	77.662	78	-0.338	Peak
5350.00	54.035	65	131	H	35.242	9.06	36.71	61.627	64	-2.373	Ave
10580.0	48.680	119	305	H	38.194	13.12	36.363	63.631	84	-20.369	Peak
10580.0	35.152	119	305	H	38.194	13.12	36.363	50.103	64	-13.897	Ave

5470 - 5725 MHz

802.11a mode

Frequency (MHz)	S.A. Reading (dBµV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dBµV/m)	FCC/IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBµV/m)	Margin (dB)	
Low Channel: 5500											
5470.00	69.040	62	150	H	35.21	9.185	36.57	76.864	78	-1.136	Peak
5470.00	53.883	62	150	H	35.21	9.185	36.57	61.707	64	-2.293	Ave
11000.0	46.790	56	120	H	38.63	13.52	36.15	62.797	84	-21.203	Peak
11000.0	34.578	56	120	H	38.63	13.52	36.15	50.585	64	-13.415	Ave
Middle Channel: 5580 MHz											
11160.0	47.890	360	153	H	38.63	13.36	36.099	63.789	84	-20.211	Peak
11160.0	35.668	360	153	H	38.63	13.36	36.099	51.567	64	-12.433	Ave
High Channel: 5700 MHz											
5725.00	67.960	78	150	H	35.24	9.412	36.61	76.001	78	-1.999	Peak
5725.00	50.593	78	150	H	35.24	9.412	36.61	58.634	64	-5.366	Ave
11400.0	47.830	360	199	H	38.63	13.75	36.03	64.176	84	-19.824	Peak
11400.0	35.228	360	199	H	38.63	13.75	36.03	51.574	64	-12.426	Ave

5470 - 5725 MHz

802.11ac20/n20 mode

Frequency (MHz)	S.A. Reading (dB μ V)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dB μ V/m)	FCC/IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dB μ V/m)	Margin (dB)	
Low Channel: 5500 MHz											
5470.00	48.020	26	176	H	38.194	12.93	36.46	62.677	78	-15.323	Peak
5470.00	34.650	26	176	H	38.194	12.93	36.46	49.307	64	-14.693	Ave
11000.0	47.070	98	192	H	38.631	13.52	36.15	63.077	84	-20.923	Peak
11000.0	34.599	98	192	H	38.631	13.52	36.15	50.606	64	-13.394	Ave
Middle Channel: 5580 MHz											
11160.0	48.050	232	135	H	38.631	13.36	36.09	63.949	84	-20.051	Peak
11160.0	35.649	232	135	H	38.631	13.36	36.09	51.548	64	-12.452	Ave
High Channel: 5700 MHz											
5725.00	69.820	79	150	H	35.242	9.412	36.61	77.861	78	-0.139	Peak
5725.00	52.857	79	150	H	35.242	9.412	36.61	60.898	64	-3.102	Ave
11400.0	47.760	249	184	H	38.631	13.752	36.03	64.106	84	-19.894	Peak
11400.0	35.629	249	184	H	38.631	13.752	36.03	51.975	64	-12.025	Ave

5470 - 5725 MHz

802.11ac40/n40 mode

Frequency (MHz)	S.A. Reading (dB μ V)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dB μ V/m)	FCC/IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dB μ V/m)	Margin (dB)	
Low Channel: 5510 MHz											
5470.00	68.430	74	125	H	35.213	9.185	36.57	76.254	78	-1.746	Peak
5470.00	50.518	74	125	H	35.213	9.185	36.57	58.342	64	-5.658	Ave
11020.0	47.020	197	258	H	38.631	13.46	36.15	62.963	84	-21.037	Peak
11020.0	35.073	197	258	H	38.631	13.46	36.15	51.016	64	-12.984	Ave
Middle Channel: 5590 MHz											
11180.0	47.930	128	149	H	38.631	13.378	36.099	63.840	84	-20.160	Peak
11180.0	36.053	128	249	H	38.631	13.378	36.099	51.962	64	-12.038	Ave
High Channel: 5670 MHz											
5725.00	69.640	67	117	H	35.242	9.412	36.613	77.681	78	-0.319	Peak
5725.00	55.456	67	117	H	35.242	9.412	36.613	63.497	64	-0.503	Ave
11340.0	45.630	163	170	H	38.631	13.453	36.071	61.643	84	-22.357	Peak
11340.0	34.913	163	170	H	38.631	13.453	36.071	50.926	64	-13.074	Ave

5470 - 5725 MHz

802.11ac80 mode

Frequency (MHz)	S.A. Reading (dB μ V)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dB μ V/m)	FCC/IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dB μ V/m)	Margin (dB)	
Low Channel: 5530 MHz											
5470.00	69.190	67	146	H	35.21	9.185	36.57	77.014	78	-0.986	Peak
5470.00	52.401	67	146	H	35.21	9.185	36.57	60.225	64	-3.775	Ave
11060.00	46.890	138	240	H	38.63	13.238	36.13	62.628	84	-21.372	Peak
11060.00	34.143	138	240	H	38.63	13.238	36.13	49.881	64	-14.119	Ave


5725 - 5850 MHz

802.11a mode


Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dBμV/m)	FCC/IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel: 5745 MHz											
11490	47.800	160	155	H	38.86	13.75	36.02	64.390	84	-19.610	Peak
11490	35.133	160	155	H	38.86	13.75	36.02	51.723	64	-12.277	Ave
Middle Channel: 5785 MHz											
11570	49.030	360	258	H	38.86	13.98	36.05	65.825	84	-18.175	Peak
11570	36.413	360	258	H	38.86	13.98	36.05	53.208	64	-10.792	Ave
High Channel: 5825 MHz											
11650	48.120	198	112	H	38.86	14.09	36.08	64.994	84	-19.006	Peak
11650	35.503	198	112	H	38.86	14.09	36.08	52.376	64	-11.624	Ave

5725 - 5850 MHz Emission Mask

Low Channel

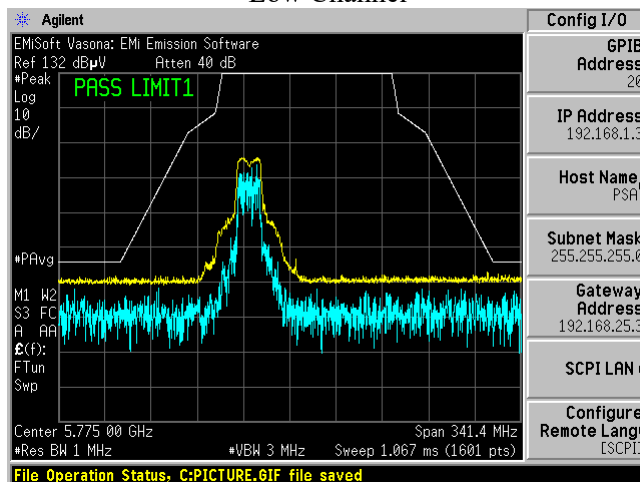

High Channel

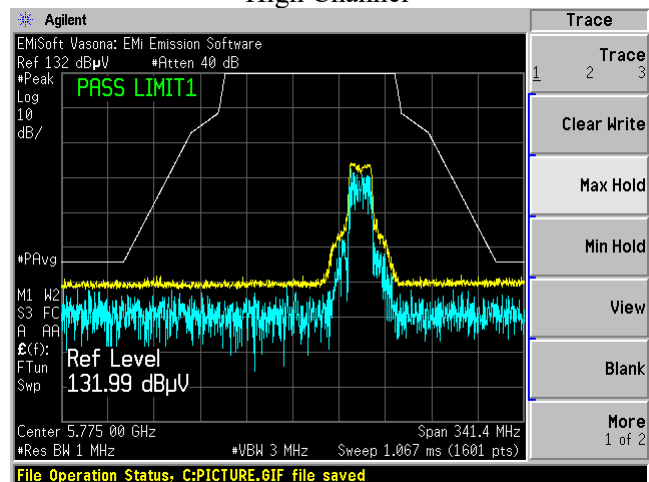


5725 - 5850 MHz

802.11ac20/n20 mode


Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dBμV/m)	FCC/IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel: 5745 MHz											
11490	47.520	185	120	H	38.86	13.75	36.02	64.110	84	-19.890	Peak
11490	35.135	185	120	H	38.86	13.75	36.02	51.726	64	-12.274	Ave
Middle Channel: 5785 MHz											
11570	47.230	42	212	H	38.86	13.98	36.05	64.025	84	-19.975	Peak
11570	35.115	42	212	H	38.86	13.98	36.05	51.910	64	-12.090	Ave
High Channel: 5825 MHz											
11650	47.660	250	178	H	38.86	14.09	36.08	64.534	84	-19.466	Peak
11650	35.515	250	178	H	38.861	14.099	36.086	52.389	64	-11.611	Ave

5725 - 5850 MHz Emission Mask

Low Channel

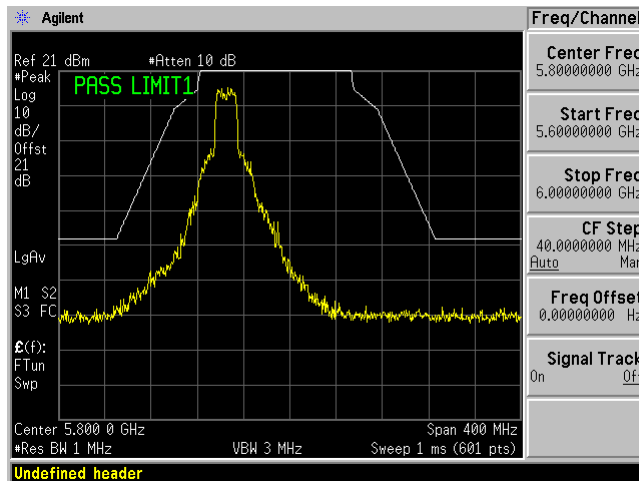

High Channel

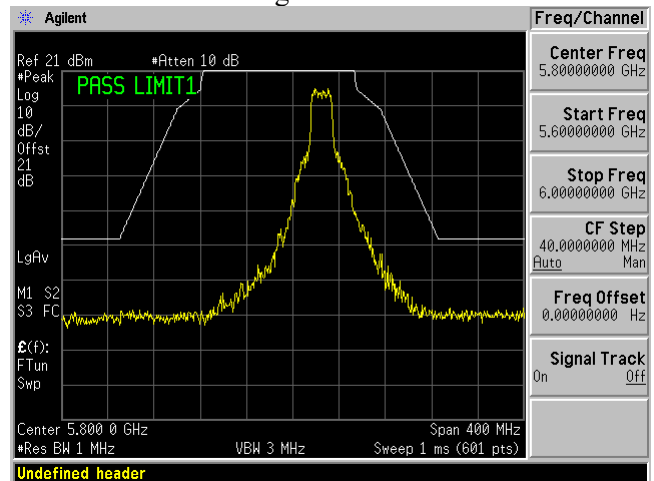

Note: ac20/n20 Emission mask was performed by measuring from conducted port and adding maximum antenna gain into offset.


5725 - 5850 MHz

802.11ac40/n40 mode


Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dBμV/m)	FCC/IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel: 5755 MHz											
11510	47.010	190	225	H	38.86	13.82	36.02	63.667	84	-20.333	Peak
11510	35.576	190	225	H	38.86	13.82	36.02	52.234	64	-11.766	Ave
High Channel: 5795 MHz											
11590	47.040	360	285	H	38.861	13.91	36.05	63.761	84	-20.239	Peak
11590	35.636	360	285	H	38.861	13.91	36.05	52.357	64	-11.643	Ave

5725 - 5850 MHz Emission Mask

Low Channel

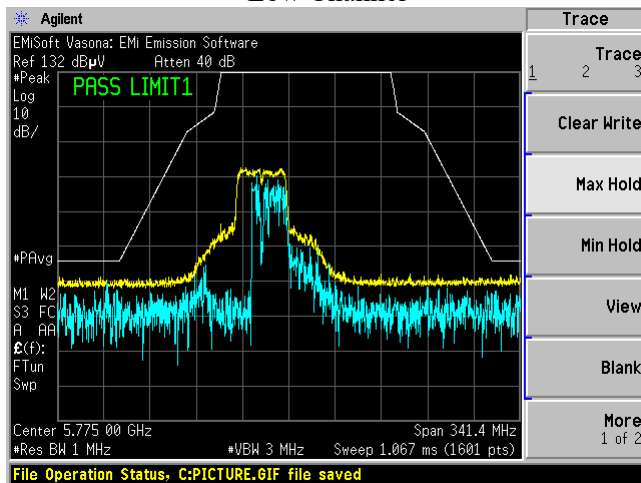

High Channel

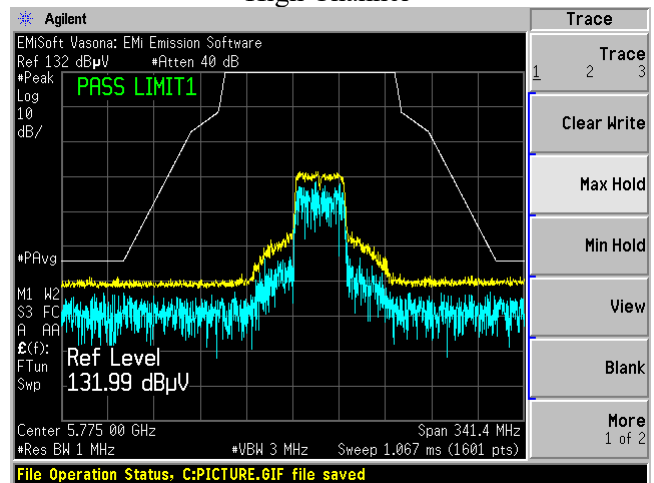


5725 - 5850 MHz

802.11ac80 mode


Frequency (MHz)	S.A. Reading (dBµV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dBµV/m)	FCC/IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBµV/m)	Margin (dB)	
High Channel: 5775 MHz											
11550	47.670	220	284	H	38.86	13.99	36.05	64.480	84	-19.520	Peak
11550	35.080	220	284	H	38.86	13.99	36.05	51.890	64	-12.110	Ave

5725 - 5850 MHz Emission Mask

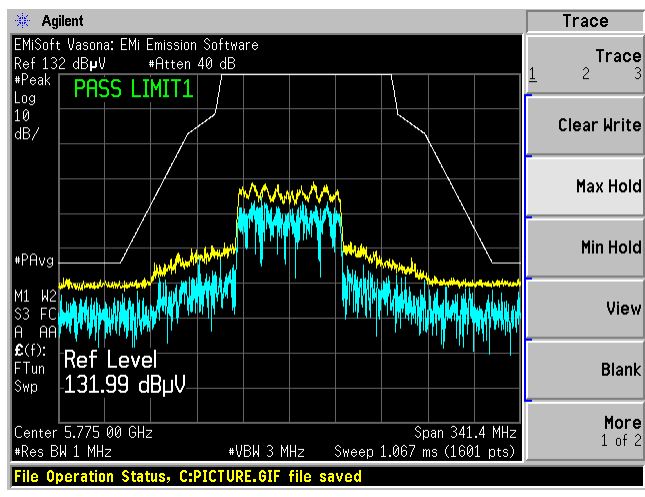

3) 1 to 18 GHz Vasona scan at 1 meter


Worst Case: 802.11n/ac40, 5190 MHz

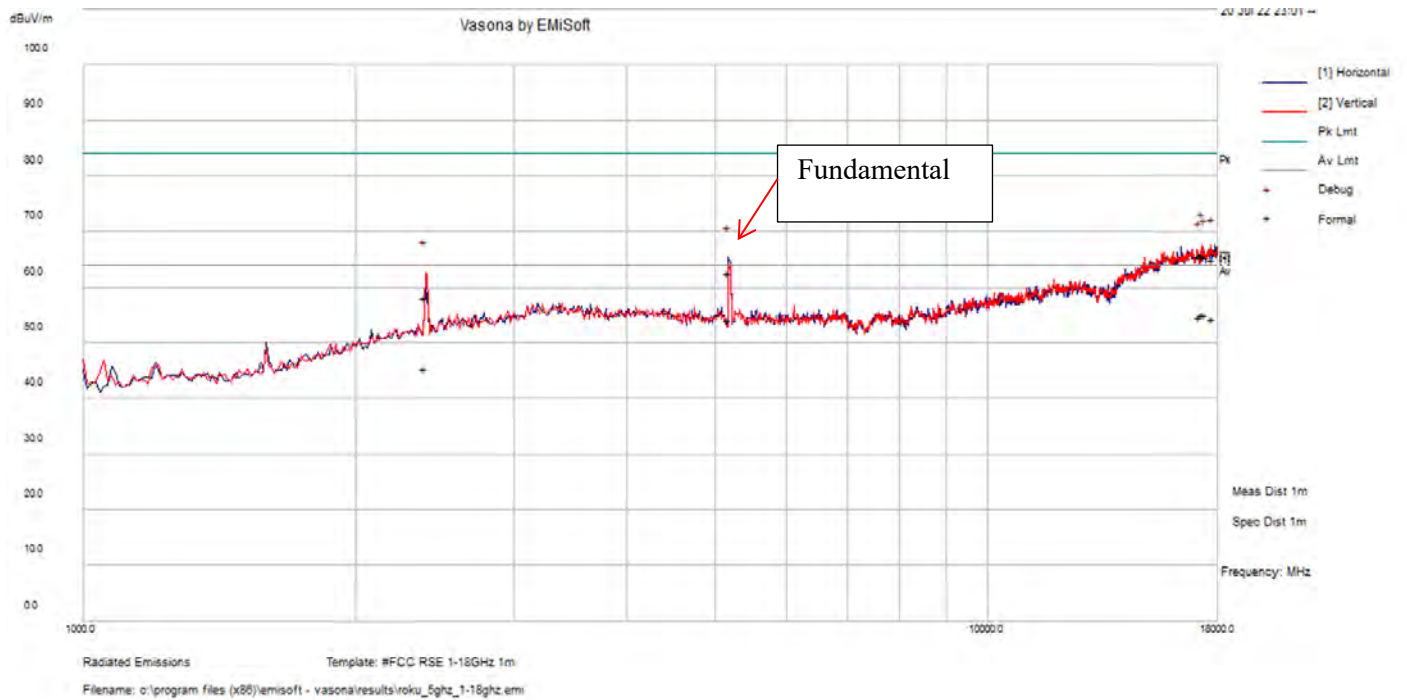

Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)	Comment
17287	47.27	18.31	65.59	237	V	113	84	-18.41	Peak
17287	36.82	18.31	55.14	237	V	113	64	-8.86	Avg

4) 18 – 26.5 GHz Worst Case Scan at 1 Meter


Worst Case: 802.11n/ac40, 5190 MHz

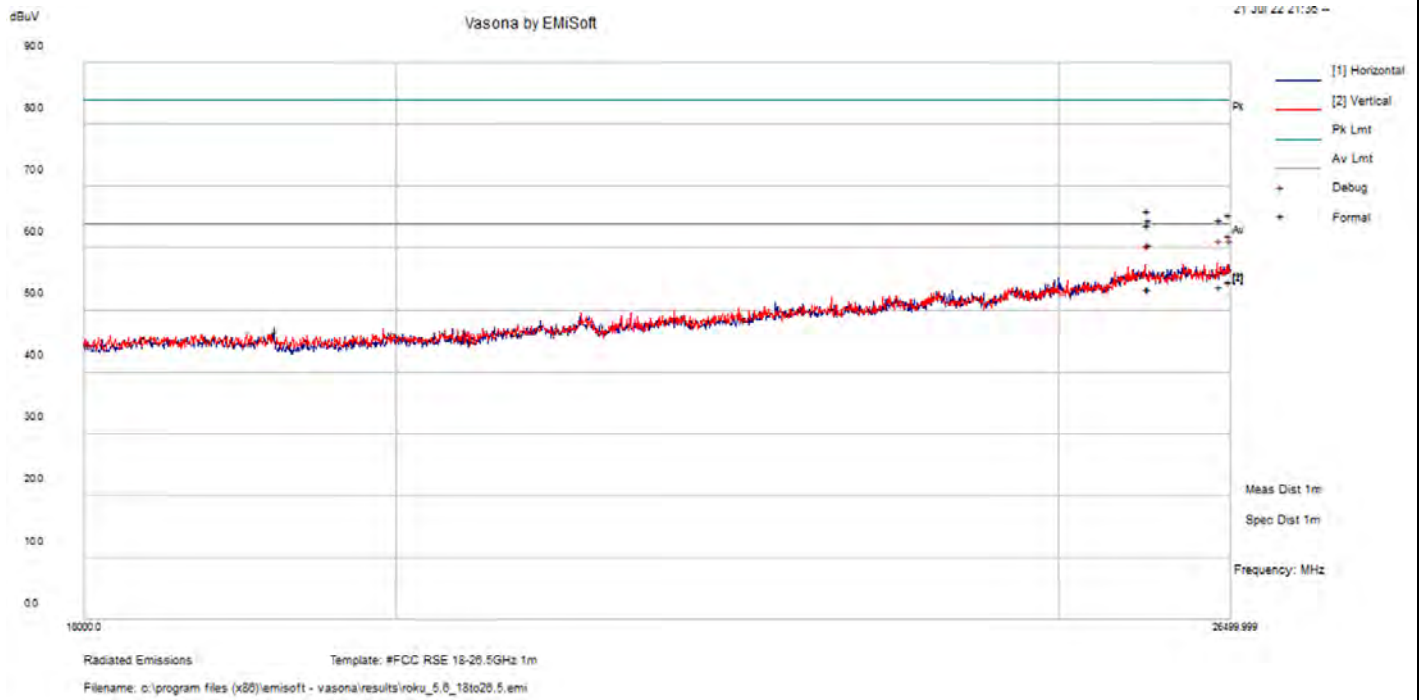

Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBµV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBµV/m)	Margin (dB)	Comment
26486	42.36	15.69	65.55	152	H	204	84	-18.45	Peak
26486	31.36	15.69	54.55	152	H	204	64	-9.45	Avg

5) 26.5 – 40 GHz Worst Case Scan at 1 Meter

Worst Case: 802.11n/ac40, 5190 MHz

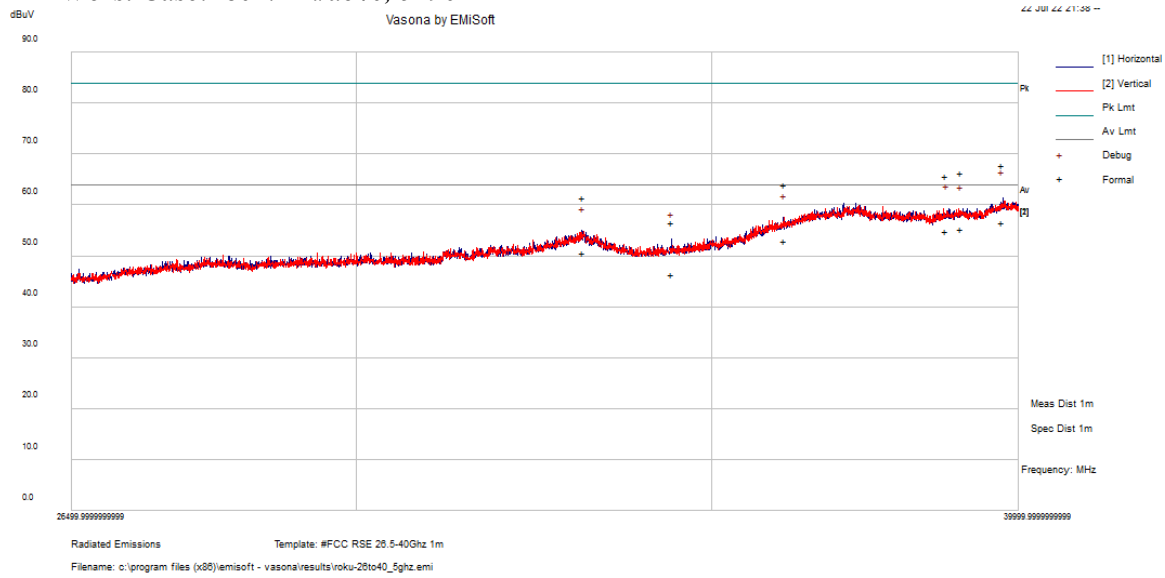

Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBµV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBµV/m)	Margin (dB)	Comment
39727.1	52.1	15.69	67.78	149	H	254	84	-16.22	Peak
39727.1	40.97	15.69	56.66	149	H	254	64	-7.34	Avg

8 FCC §15.407(e) & ISEDC RSS-247 §6.2 - 6 dB, 26 dB, & 99% - Occupied Bandwidth


8.1 Applicable Standards

As per FCC §15.407(e) and ISEDC RSS-247 6.2.4(1): for equipment operating in the band 5725 – 5850 MHz, the minimum 6 dB bandwidth of U-NII devices shall be 500 kHz.

8.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 or 26 dB from the reference level. Record the frequency difference as the minimum emission or emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

8.3 Test Setup Block Diagram

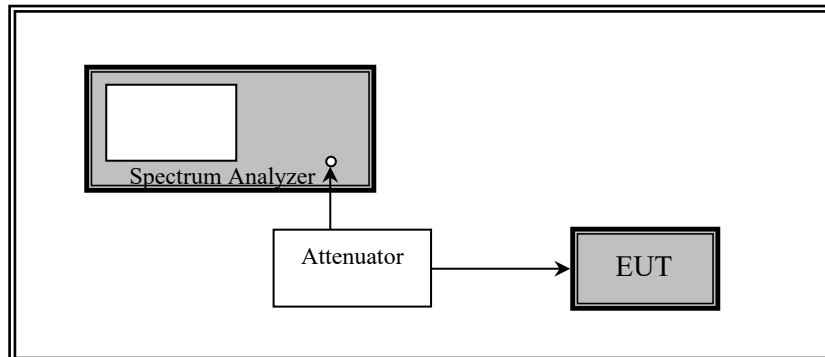

8.4 Test Equipment List and Details

BACL Number	Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Interval
287	Agilent	Signal Analyzer	E4446 A	US44300386	2022-05-05	1 year
912	Rhode & Schwarz	Signal Analyzer	FSV40	1321.3008k3 9-101203- UW	2022-05-05	1 year
655	Rohde & Schwarz	Signal Analyzer	FSQ26	200749	2022-02-07	2 years
-	-	20dB attenuator	-	-	Each time ¹	N/A
-	-	RF cable	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 "A2LA Policy on Metrological Traceability".

8.5 Test Environmental Conditions

Temperature:	22-24 °C
Relative Humidity:	40-41 %
ATM Pressure:	103.1-104.1 kPa

Testing was performed by Christian Schwartz from 2022-07-08 to 2022-07-28 at the RF site.

8.6 Test Results

Please refer to the following tables and plots.

5150 - 5250 MHz

Channel	Frequency (MHz)	99% OBW (MHz)	26 dB OBW (MHz)
802.11a mode			
36	5180	16.6388	34.993
40	5200	16.6831	35.601
48	5240	16.7864	35.948
802.11n/ac20 mode			
36	5180	17.8853	36.382
40	5200	17.7390	38.466
48	5240	17.7232	36.816
802.11n/ac40 mode			
38	5190	36.3767	70.59
46	5230	38.1580	87.87
802.11ac80 mode			
42	5210	76.1329	161.22

5250 - 5350 MHz

Channel	Frequency (MHz)	99% OBW (MHz)	26 dB OBW (MHz)
802.11a mode			
52	5260	17.8407	41.766
56	5280	17.9832	39.247
64	5320	17.1547	39.161
802.11n/ac20 mode			
52	5260	18.3411	42.2
56	5280	18.3295	43.155
64	5320	18.0921	43.502
802.11n/ac40 mode			
54	5270	36.8597	92.01
62	5310	36.1447	43.3
802.11ac80 mode			
58	5290	75.5960	84.52

5470MHz - 5725 MHz

Channel	Frequency (MHz)	99% OBW (MHz)	26 dB OBW (MHz)
802.11a mode			
100	5500	19.0110	42.894
116	5580	31.548	49.407
140	5700	16.8552	33.777
802.11n/ac20 mode			
100	5500	18.3229	44.11
116	5580	30.738	48.73
140	5700	17.7930	38.09
802.11n/ac40 mode			
102	5510	36.4072	79.75
118	5590	54.399	107.58
134	5670	37.0604	83.88
802.11ac80 mode			
106	5530	76.0746	154.56
122	5610	96.382	213.541


5725 - 5850 MHz

Channel	Frequency (MHz)	99% OBW (MHz)	6 dB OBW (MHz)	Limit ($\geq 500\text{kHz}$)
802.11a mode				
149	5745	27.1084	16.263	Pass
157	5785	27.1244	16.350	Pass
165	5825	26.5805	16.325	Pass
802.11n/ac20 mode				
149	5745	28.5323	16.737	Pass
157	5785	27.5414	16.677	Pass
165	5825	26.5057	16.700	Pass
802.11n/ac40 mode				
151	5755	58.0821	35.87	Pass
159	5795	57.4060	35.679	Pass
802.11ac80 mode				
155	5775	106.4691	75.392	Pass

5150 - 5250 MHz 802.11a OBW


99% Occupied Band Width

Low Channel

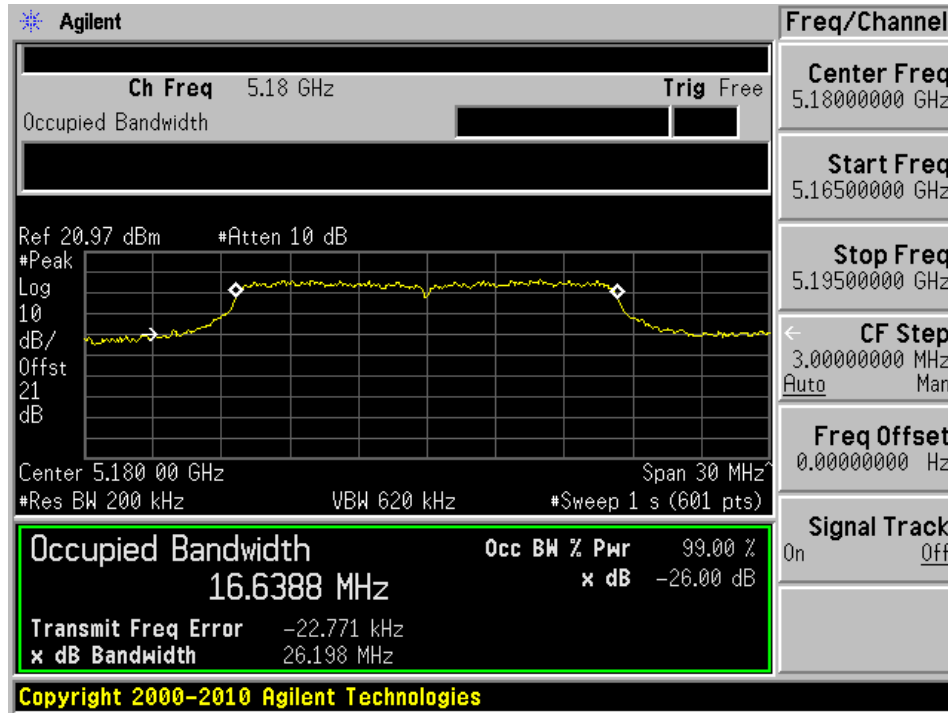

26dB Occupied Band Width


Low Channel

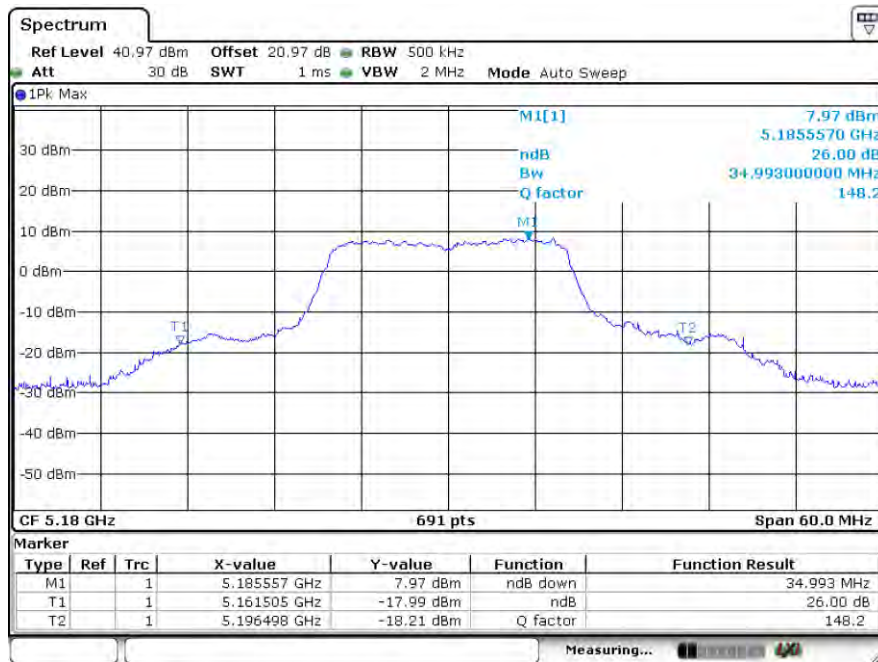

Date: 27 JUL 2022 13:31:05


99% Occupied Band Width

Middle Channel

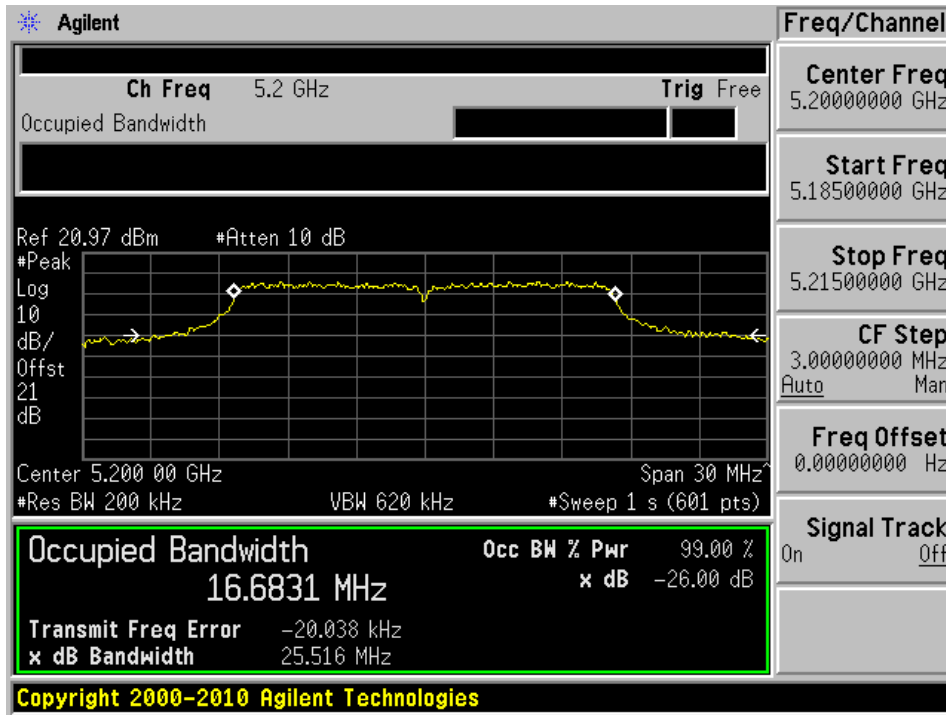

26dB Occupied Band Width


Middle Channel

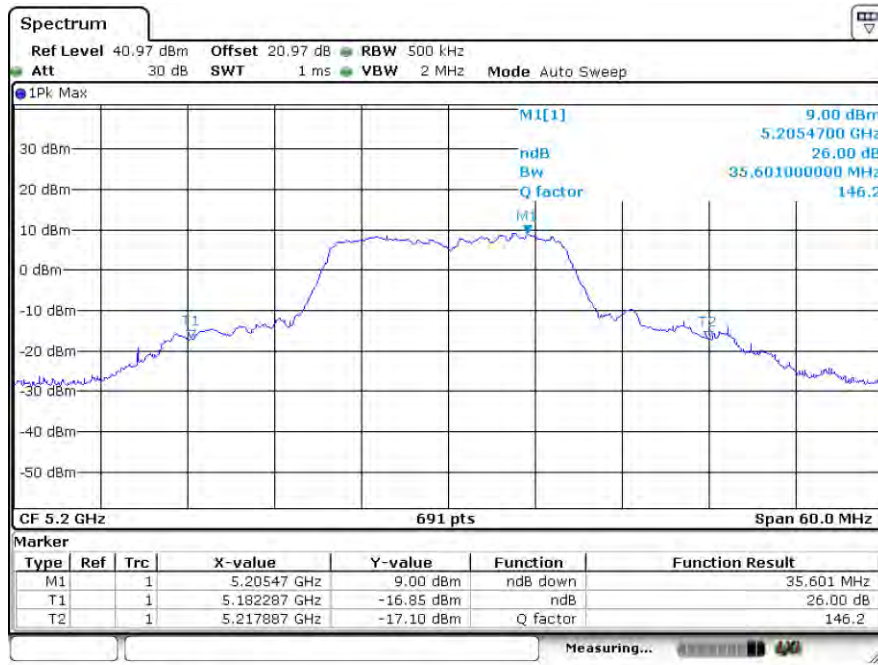

Date: 27 JUL 2022 13:39:26


99% Occupied Band Width

High Channel

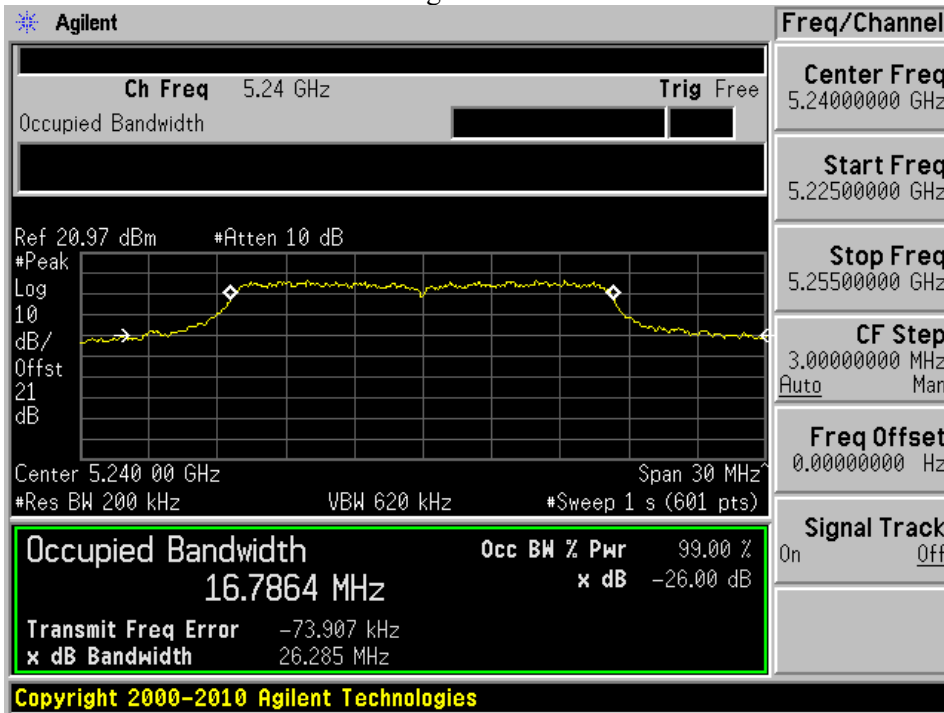

26dB Occupied Band Width

High Channel

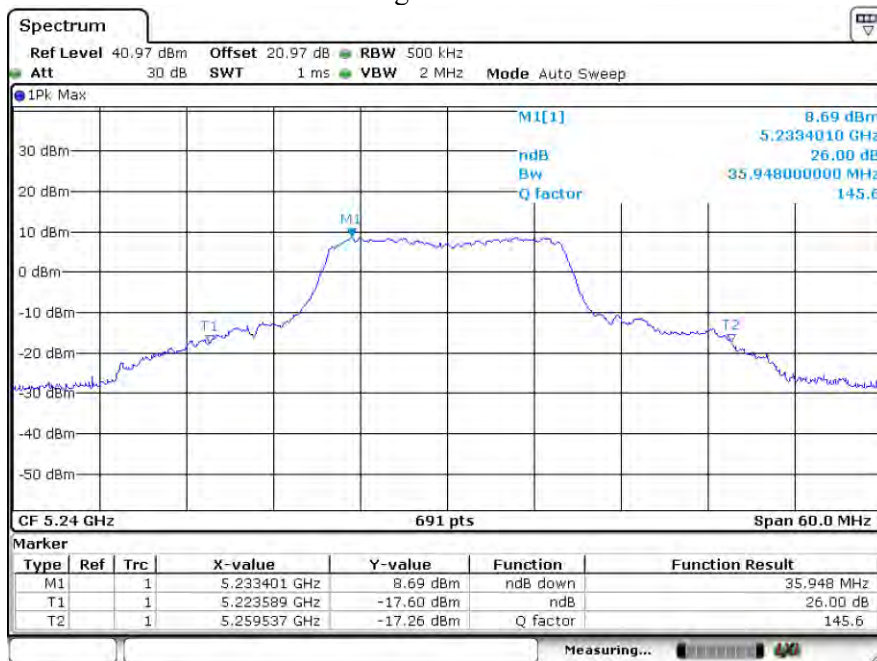


Date: 27 JUL 2022 13:40:55

5150 - 5250 MHz 802.11n20 OBW


99% Occupied Band Width

Low Channel

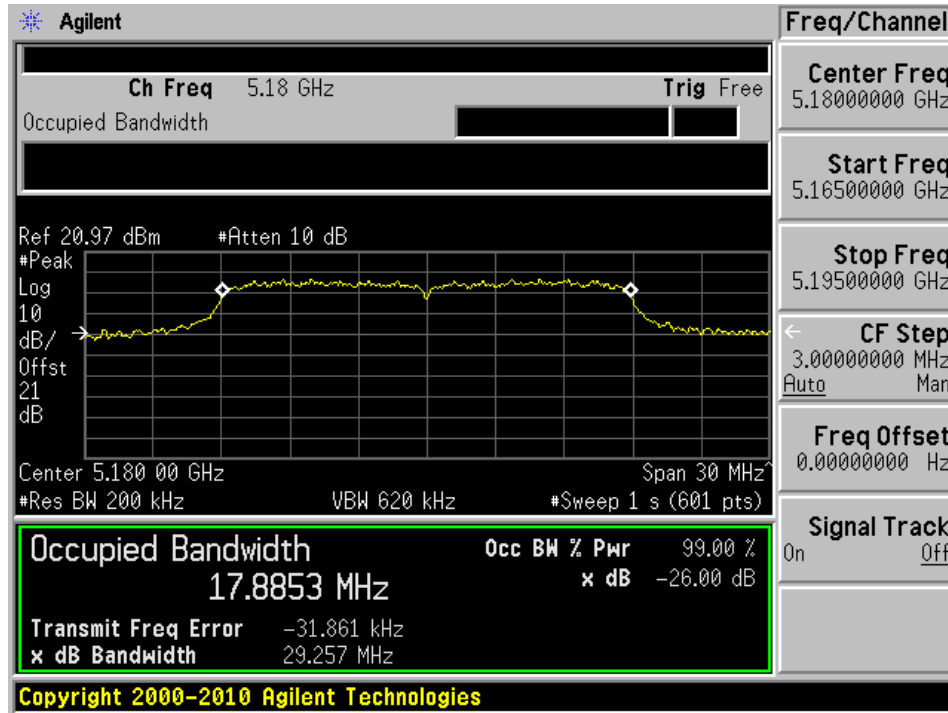

26dB Occupied Band Width


Low Channel

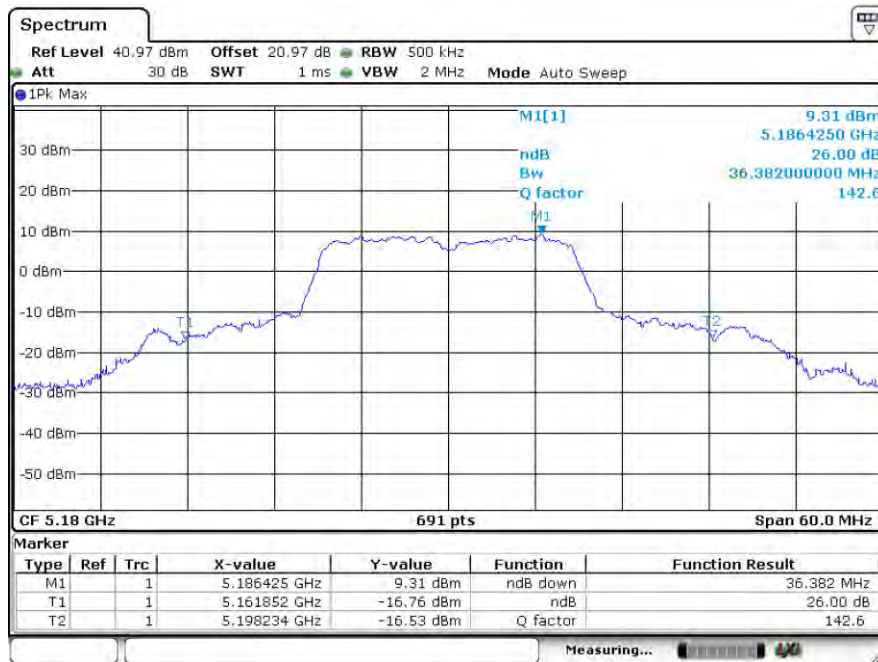

Date: 27 JUL 2022 14:11:43


99% Occupied Band Width

Middle Channel

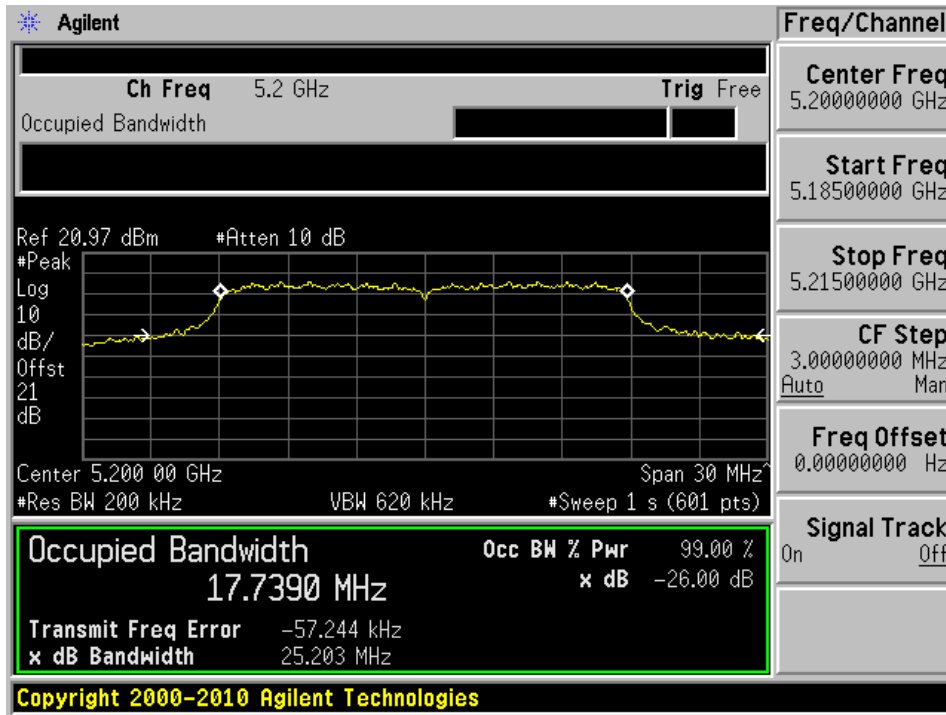

26dB Occupied Band Width


Middle Channel

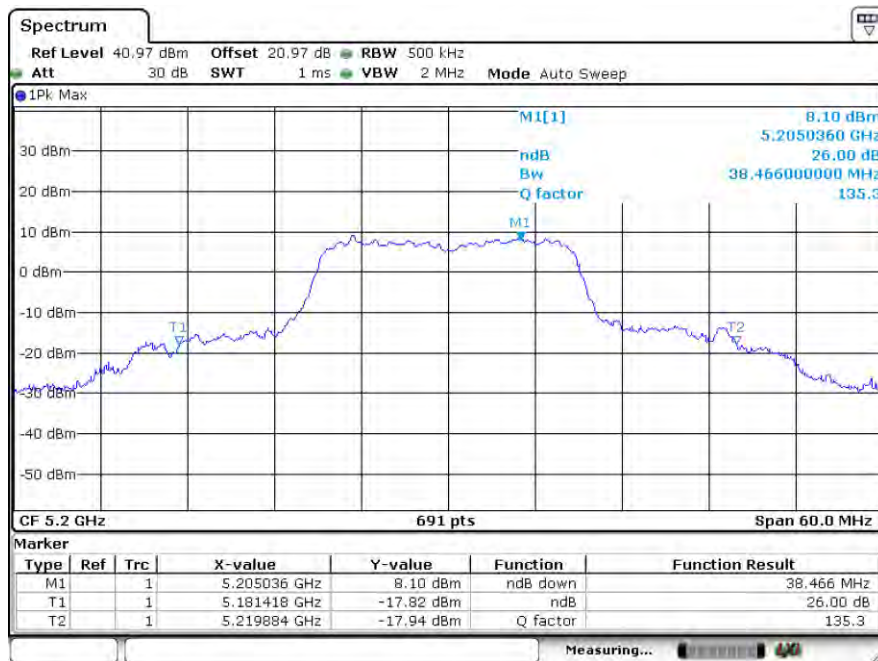

Date: 27 JUL 2022 14:14:17


99% Occupied Band Width

High Channel

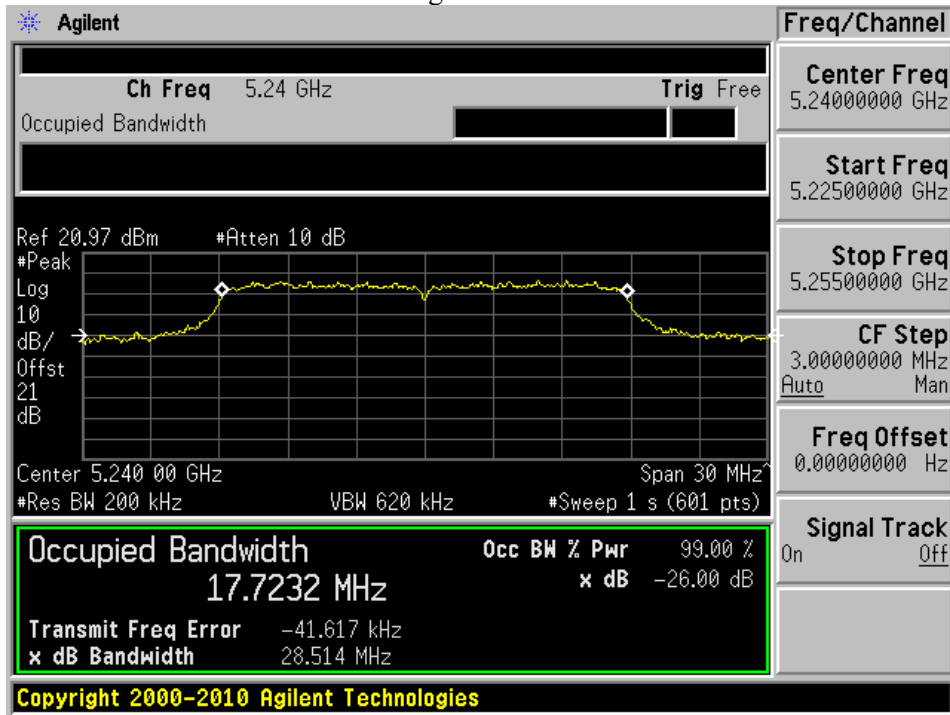

26dB Occupied Band Width

High Channel

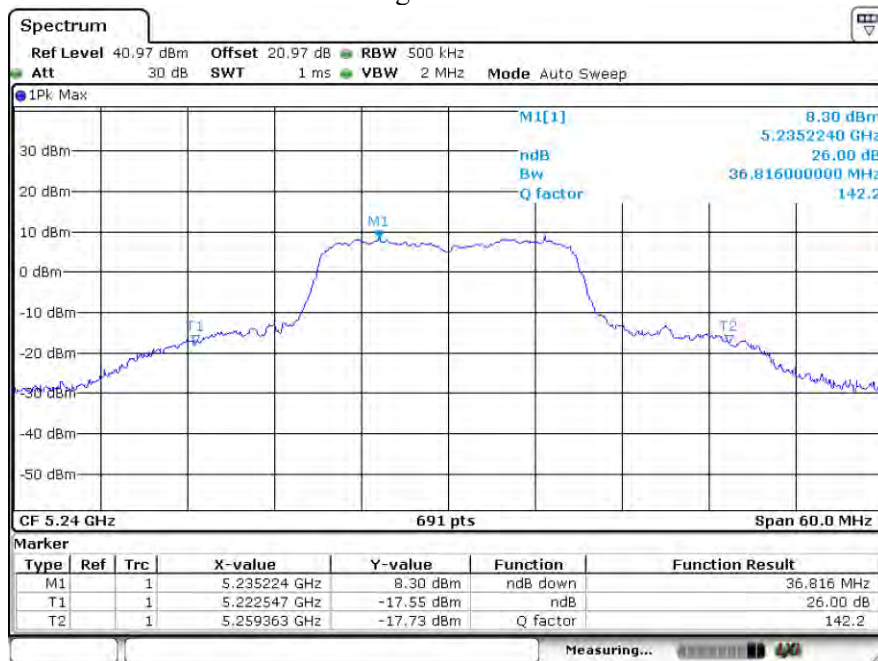


Date: 27 JUL 2022 14:15:33

5150 - 5250 MHz 802.11n40 OBW


99% Occupied Band Width

Low Channel

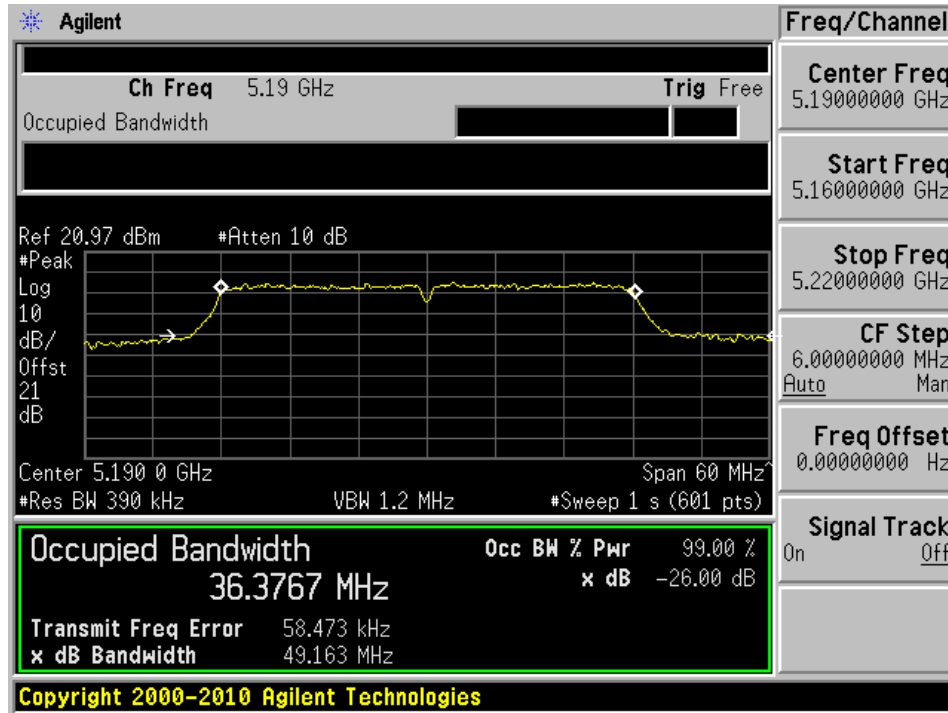

26dB Occupied Band Width


Low Channel

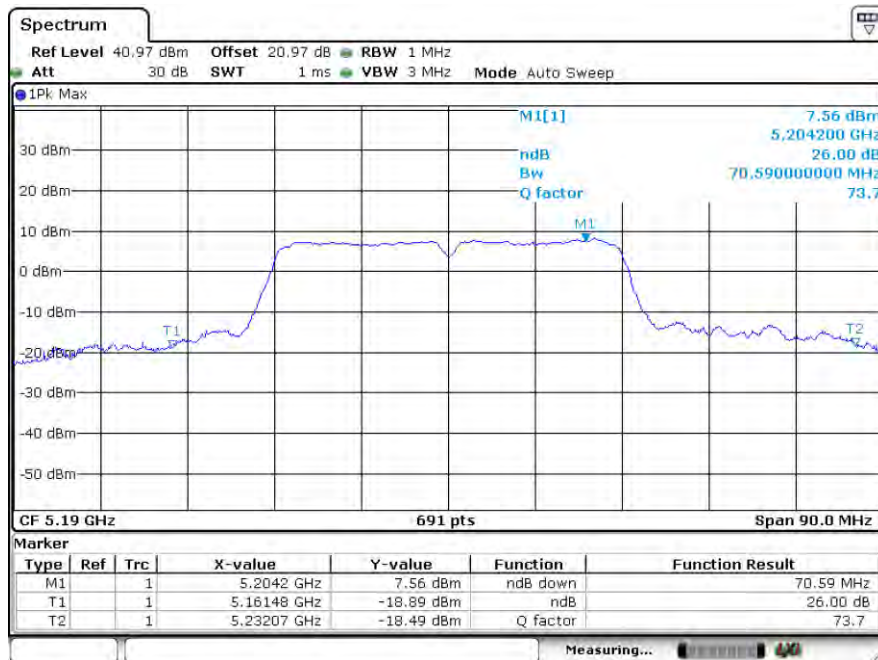

Date: 27 JUL 2022 14:37:50


99% Occupied Band Width

Mid Channel

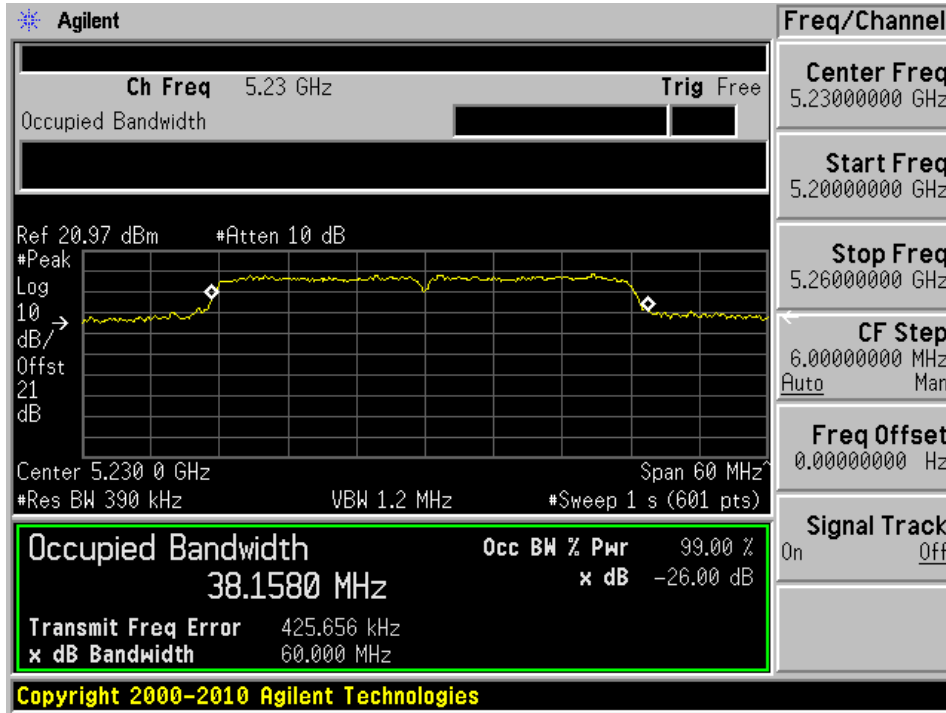

26dB Occupied Band Width

Mid Channel

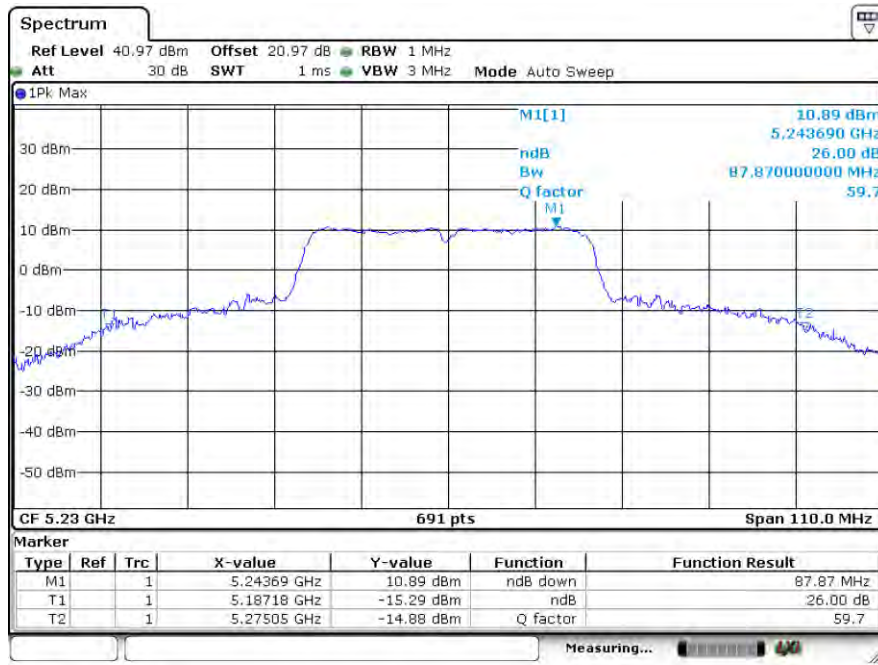


Date: 27 JUL 2022 14:41:14

5150 - 5250 MHz 802.11ac80 OBW


99% Occupied Band Width

Low Channel

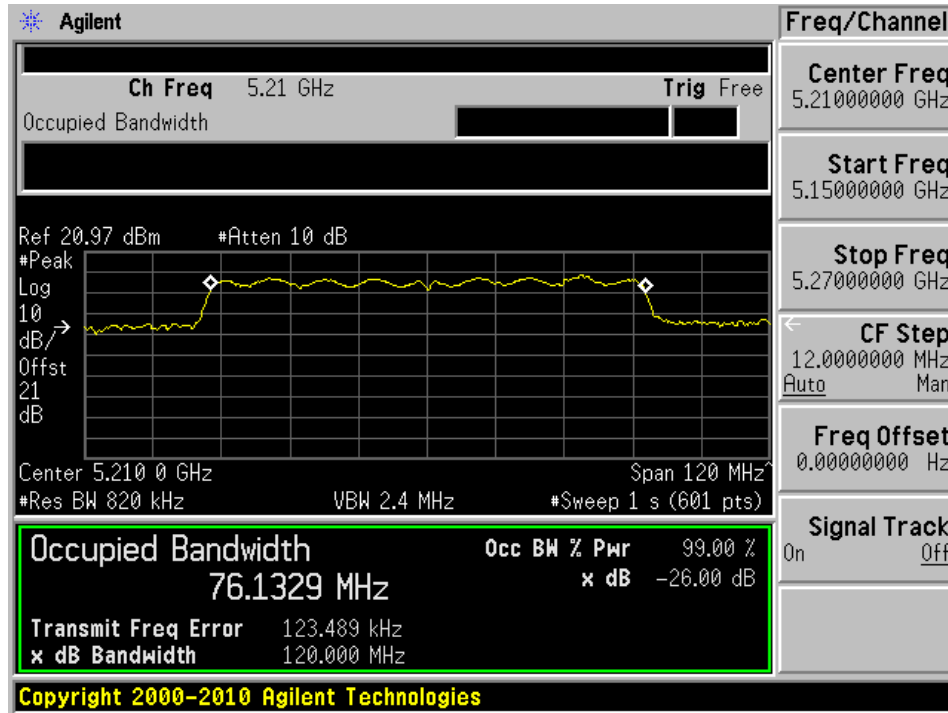

26dB Occupied Band Width

Low Channel

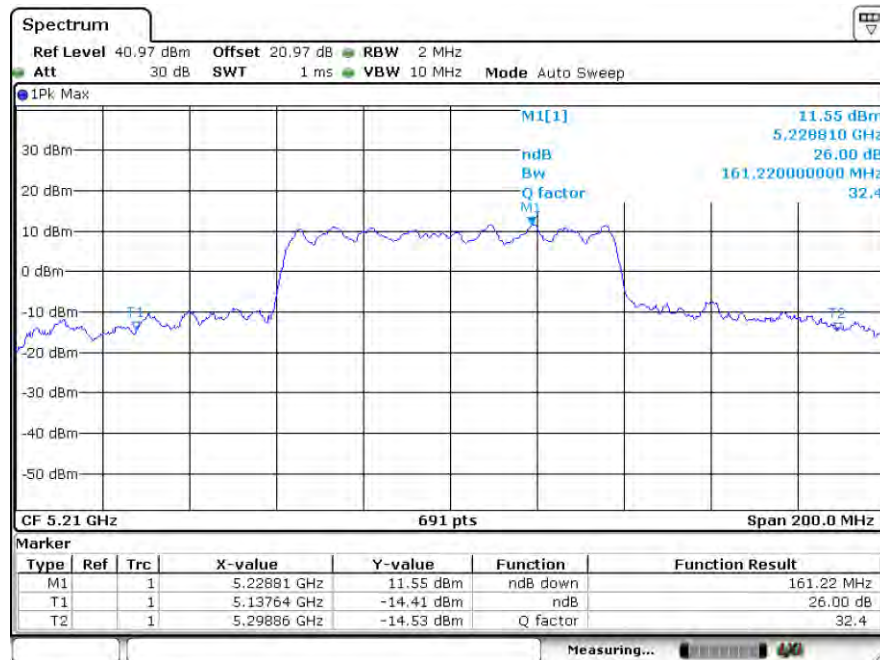


Date: 27 JUL 2022 15:16:03

5250 - 5350 MHz 802.11a


99% Occupied Band Width

Low Channel

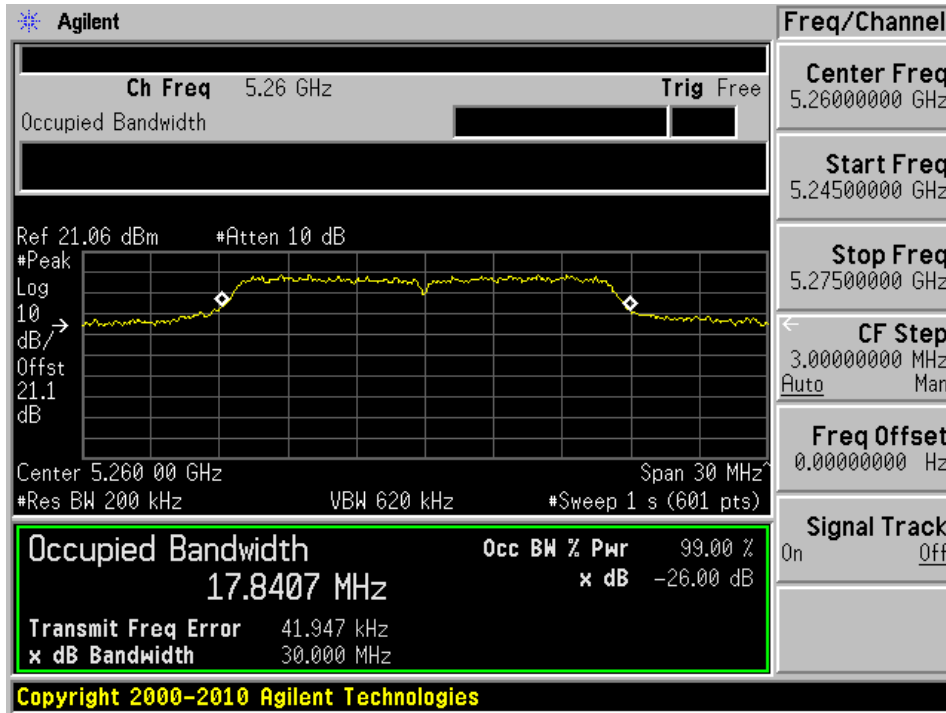

26dB Occupied Band Width


Low Channel

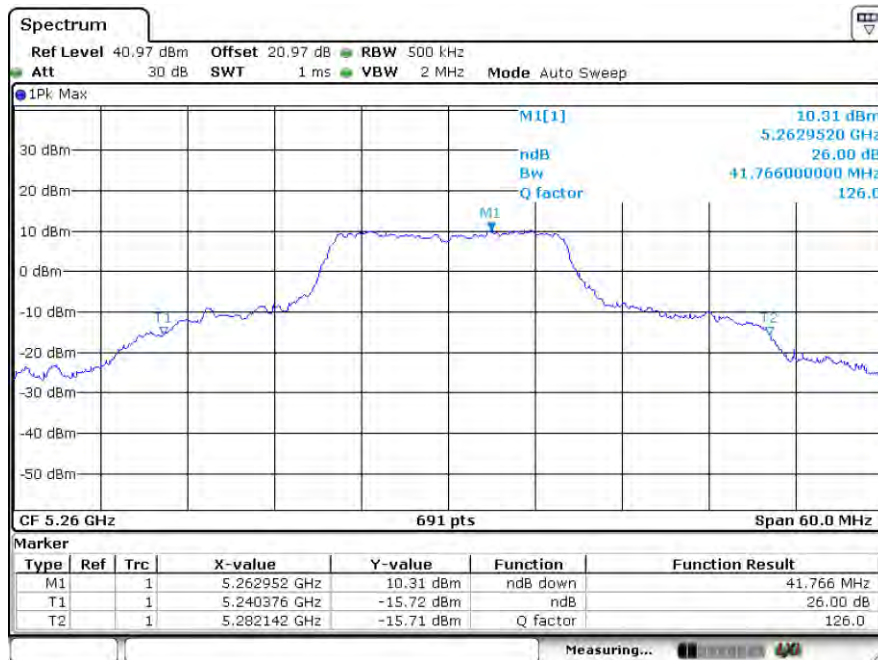

Date: 27 JUL 2022 13:46:06


99% Occupied Band Width

Mid Channel

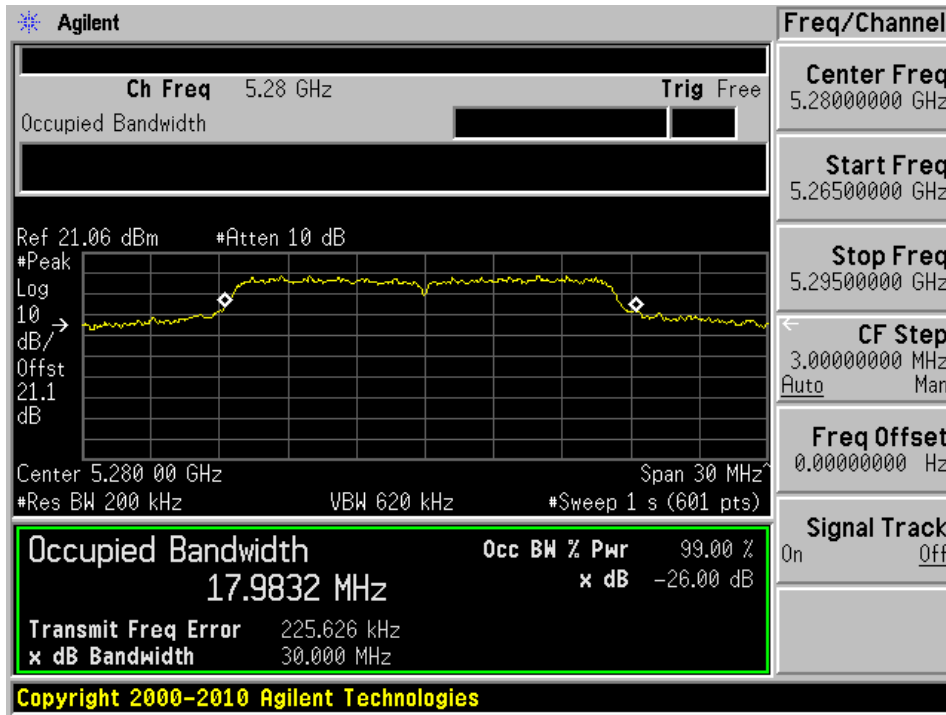

26dB Occupied Band Width


Mid Channel

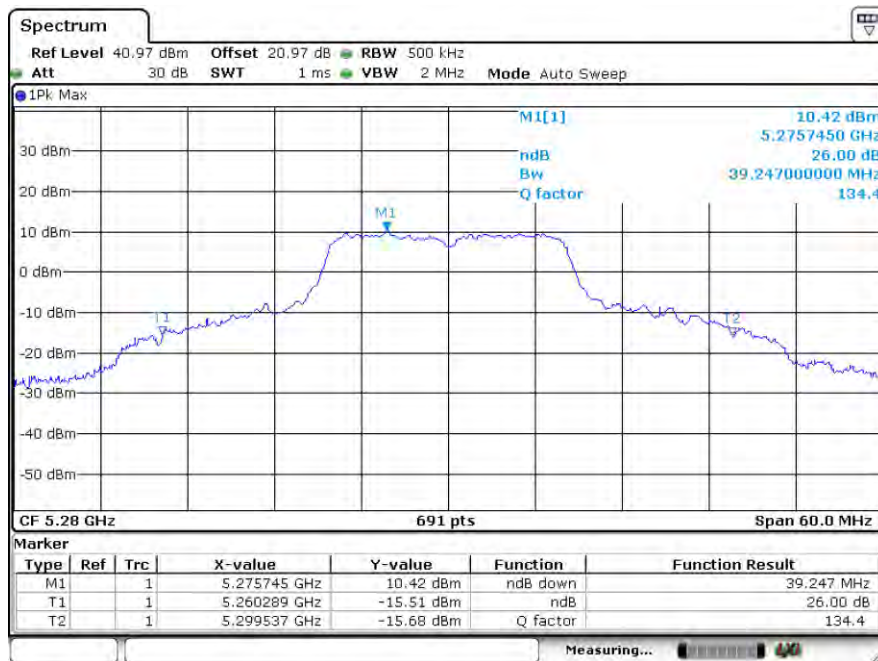

Date: 27 JUL 2022 13:48:11


99% Occupied Band Width

High Channel

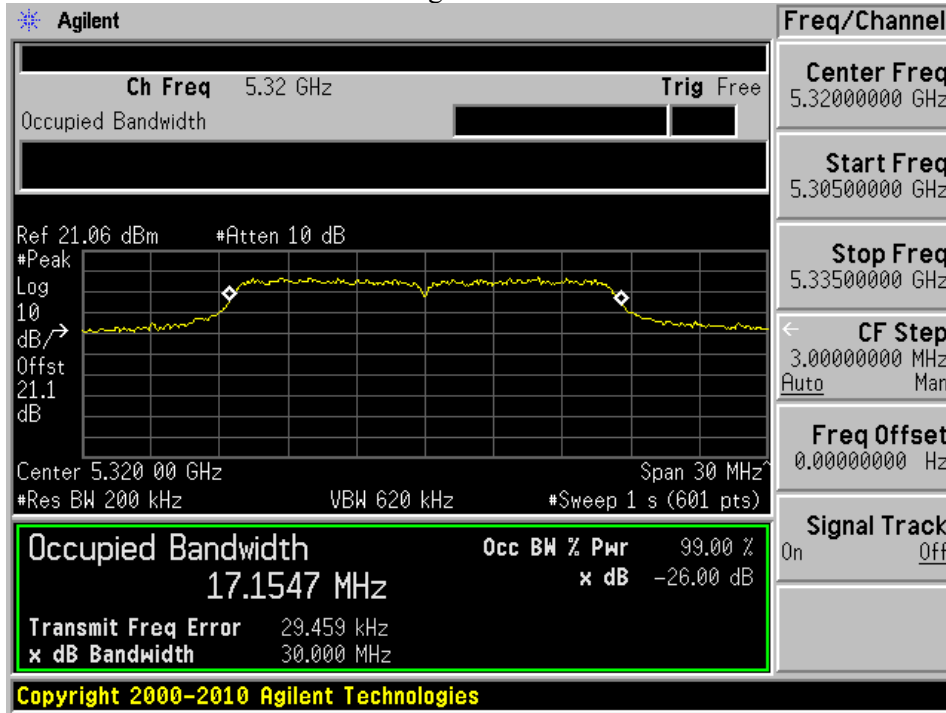

26dB Occupied Band Width

High Channel

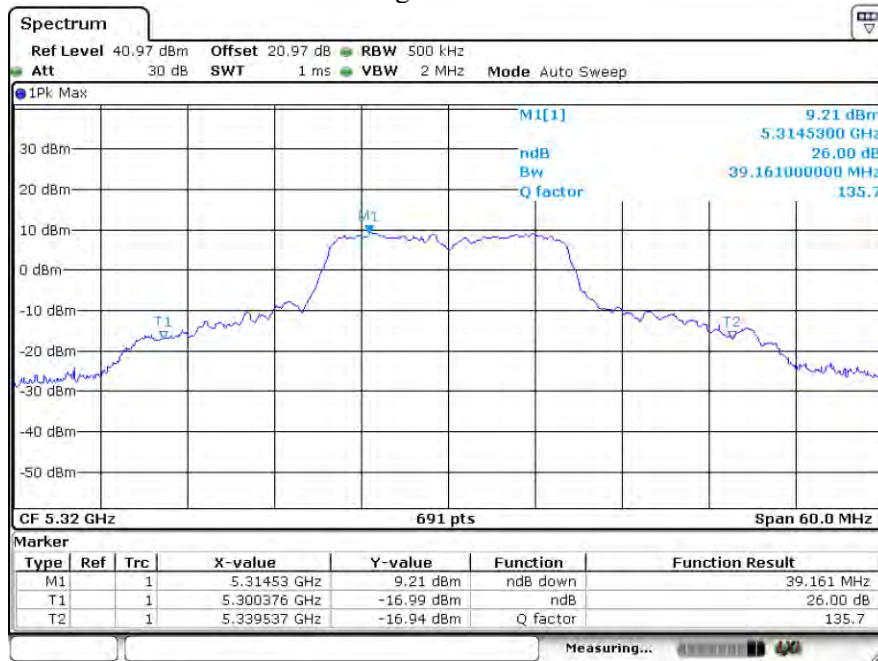


Date: 27 JUL 2022 13:51:21

5250 - 5350 MHz 802.11n20


99% Occupied Band Width

Low Channel

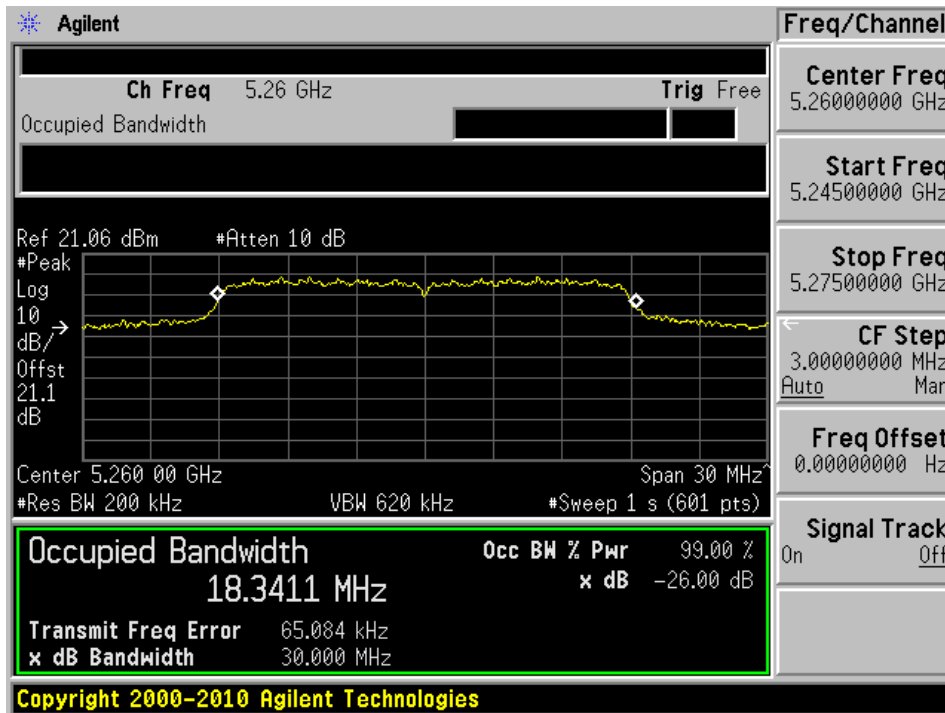

26dB Occupied Band Width


Low Channel

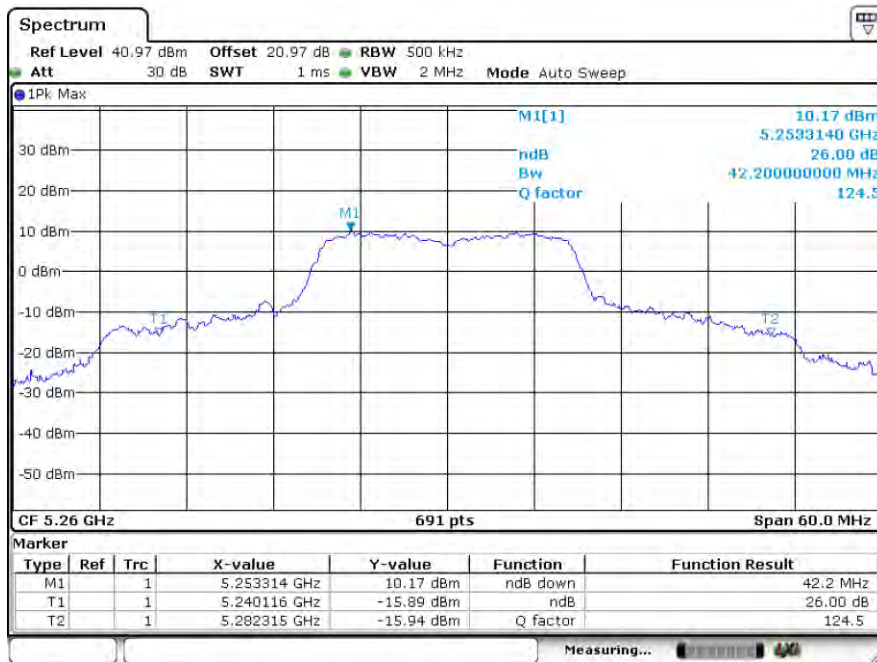

Date: 27 JUL 2022 14:17:28


99% Occupied Band Width

Mid Channel

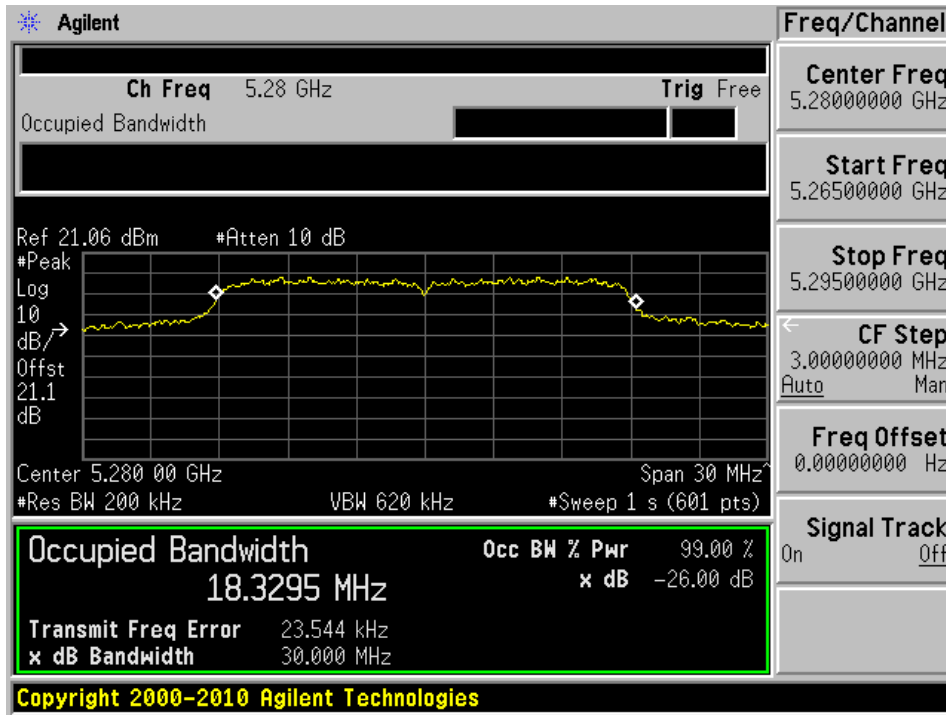

26dB Occupied Band Width


Mid Channel

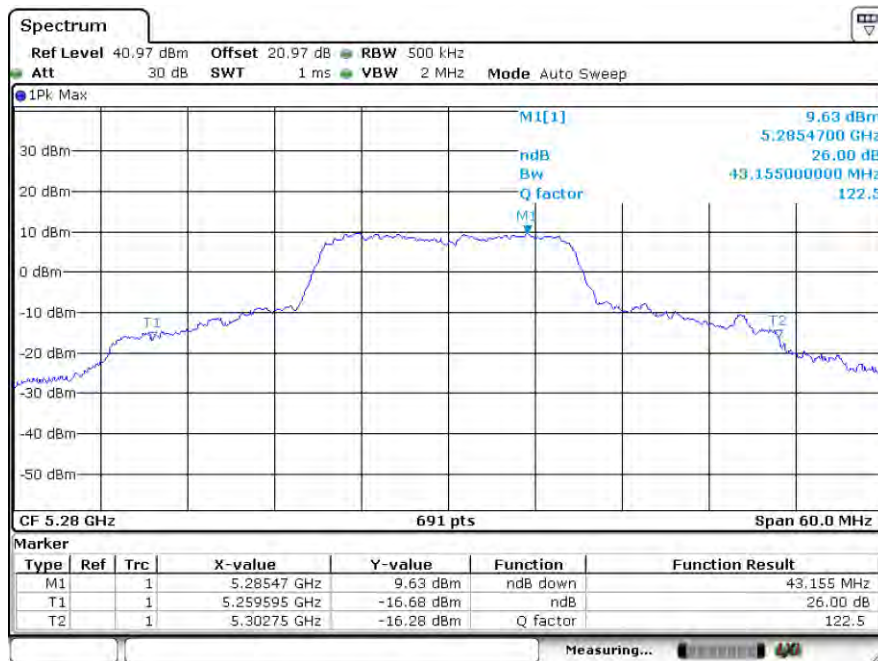

Date: 27 JUL 2022 14:21:32


99% Occupied Band Width

High Channel

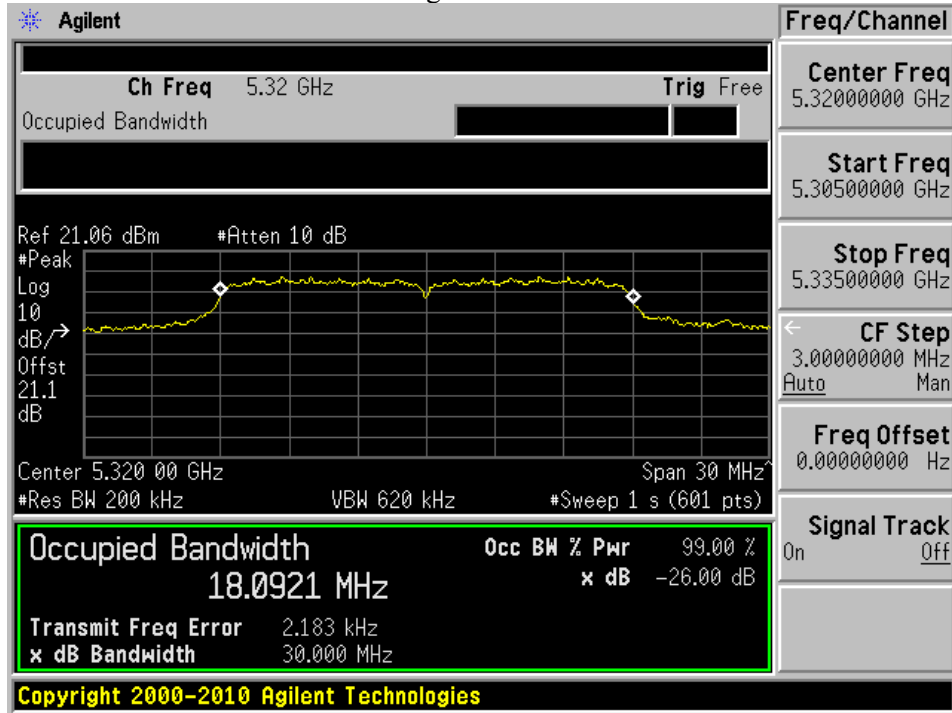

26dB Occupied Band Width

High Channel

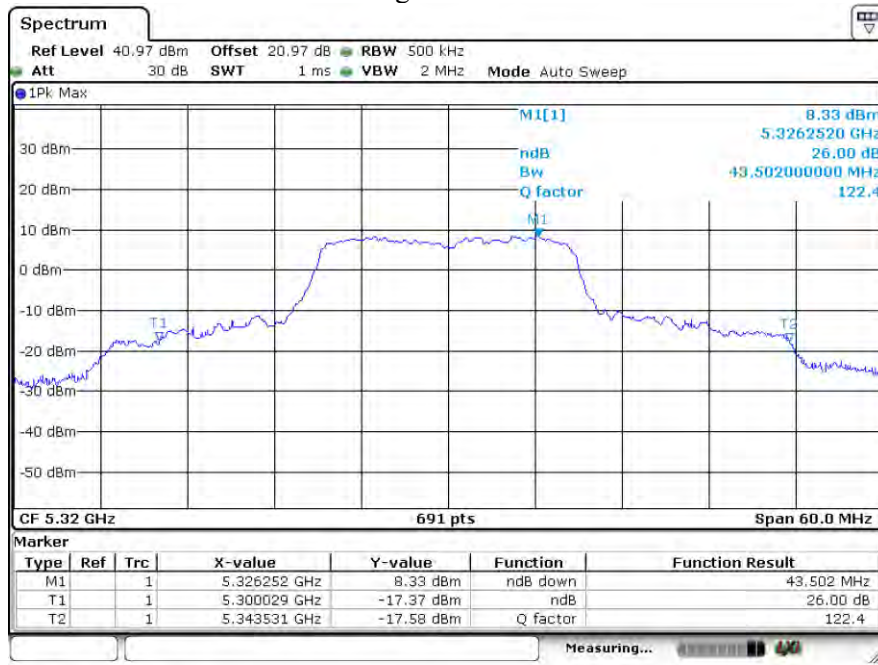


Date: 27 JUL 2022 14:24:16

5250 - 5350 MHz 802.11n40


99% Occupied Band Width

Low Channel

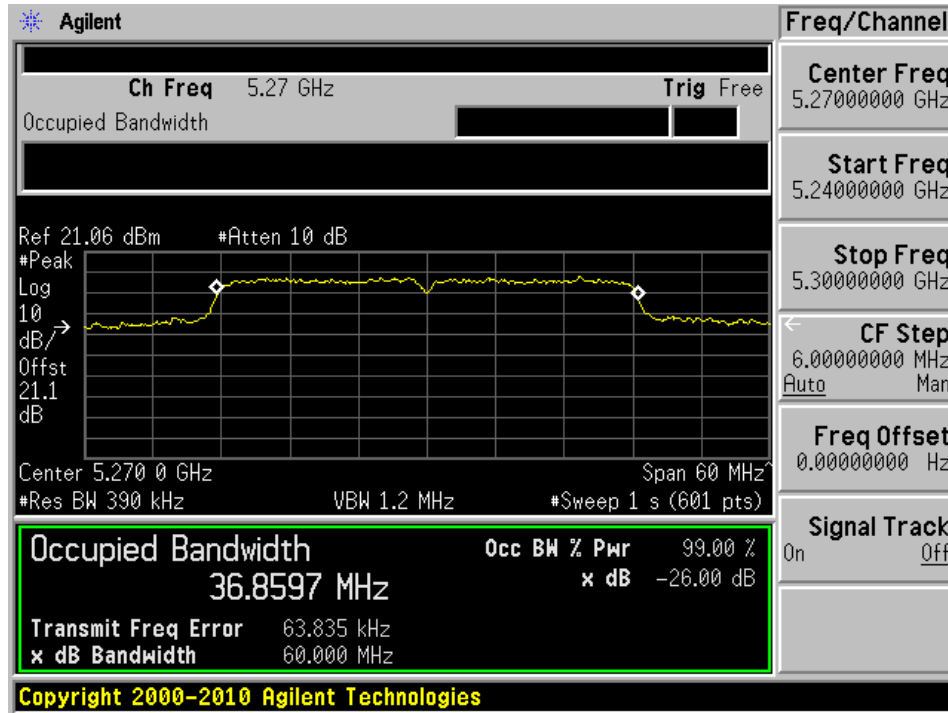

26dB Occupied Band Width


Low Channel

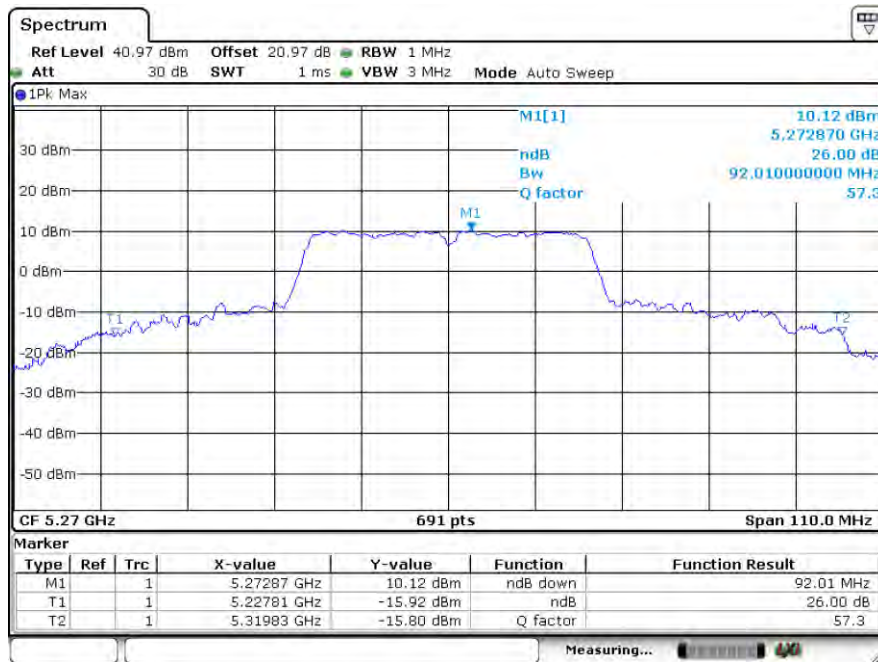

Date: 27 JUL 2022 14:42:52


99% Occupied Band Width

Mid Channel

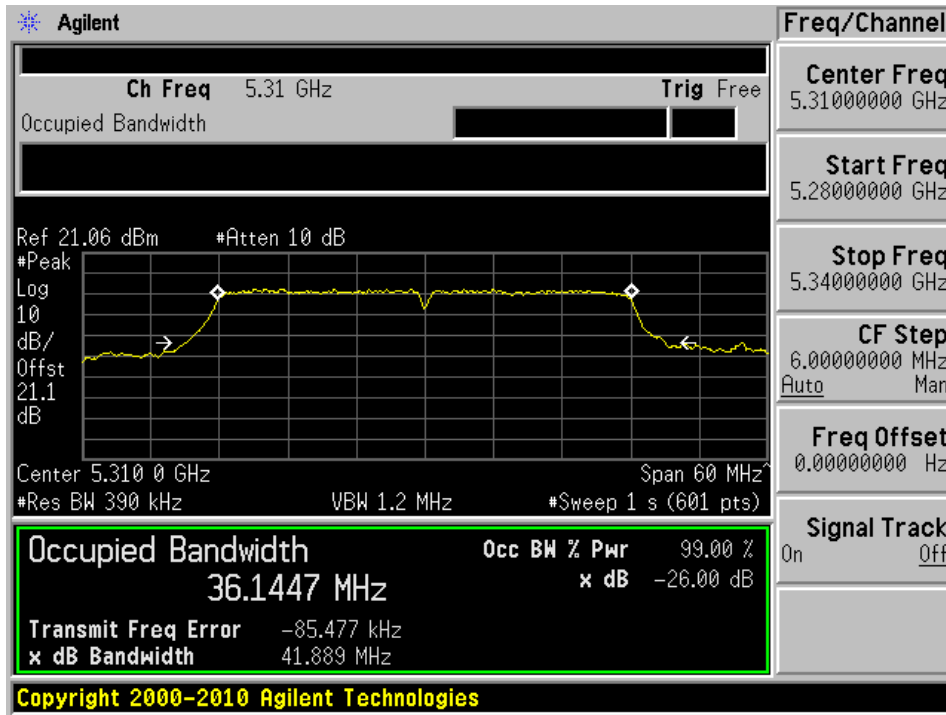

26dB Occupied Band Width

Mid Channel

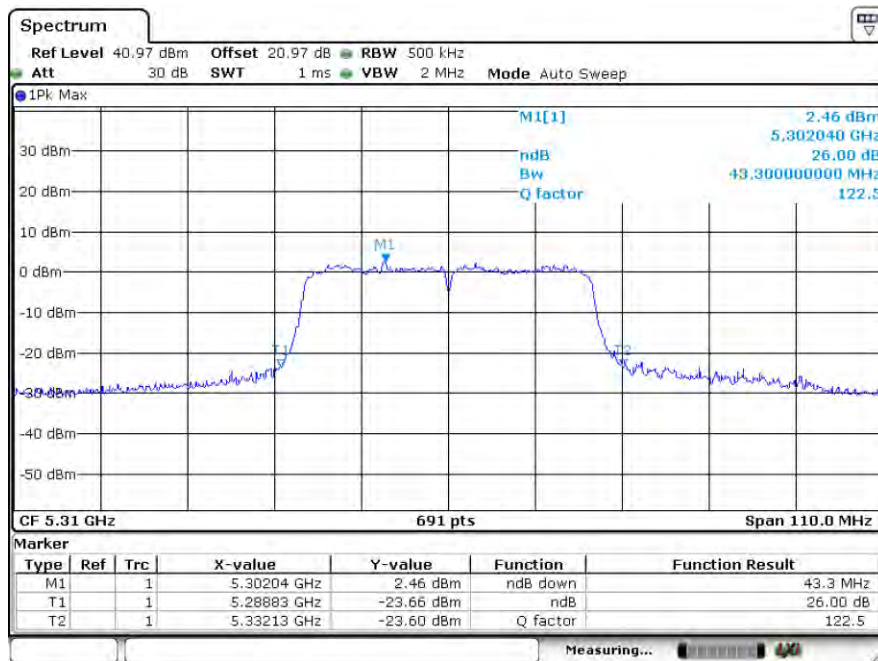


Date: 27 JUL 2022 14:45:23

5250 - 5350 MHz 802.11ac80


99% Occupied Band Width

Low Channel

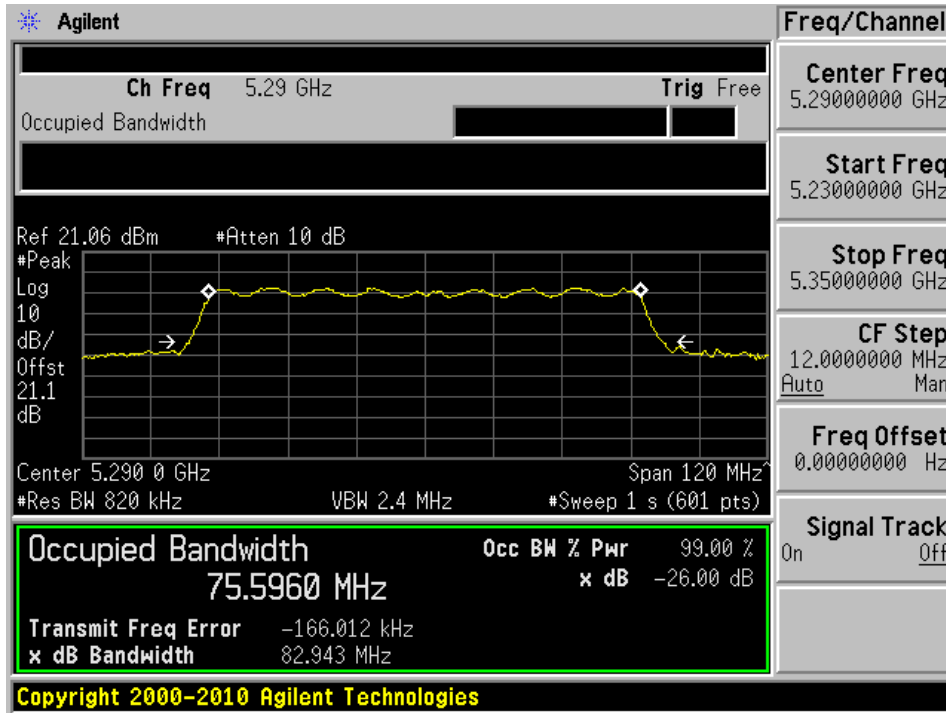

26dB Occupied Band Width

Low Channel

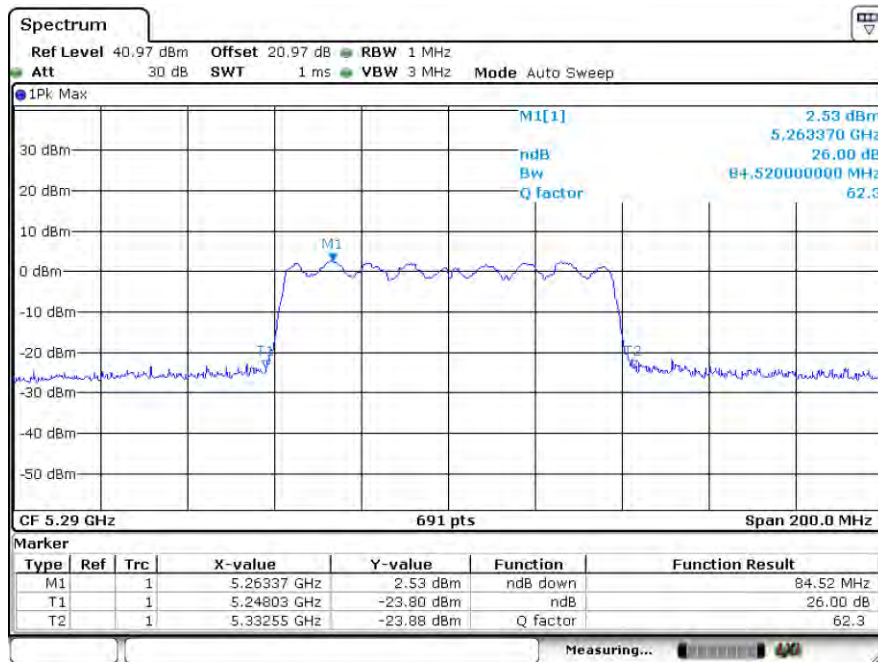


Date: 27 JUL 2022 15:19:18

5470 - 5725 MHz 802.11a


99% Occupied Band Width

Low Channel

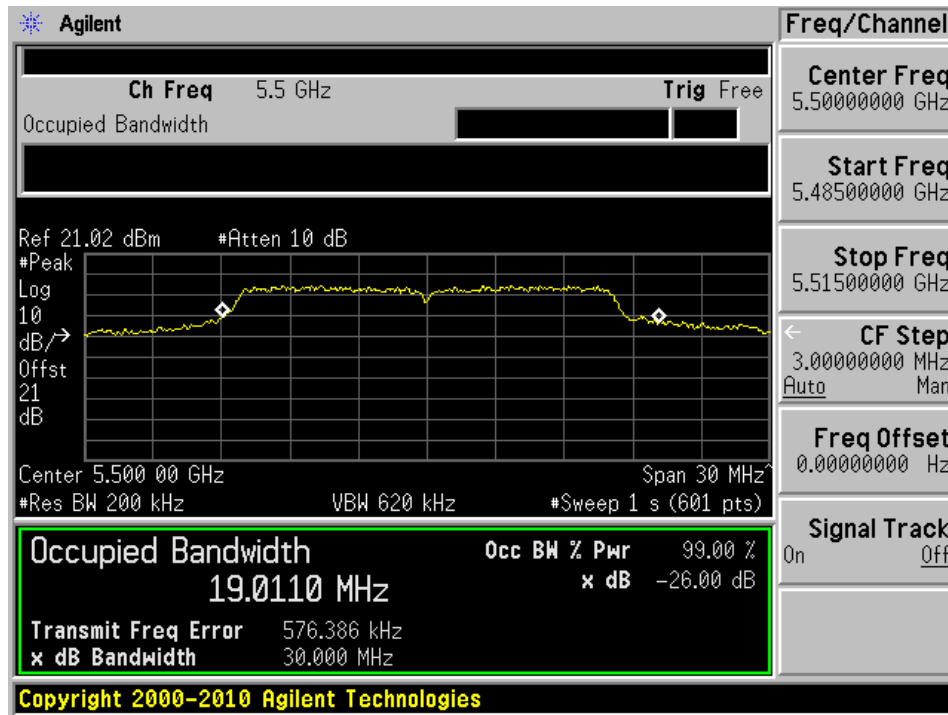

26dB Occupied Band Width


Low Channel

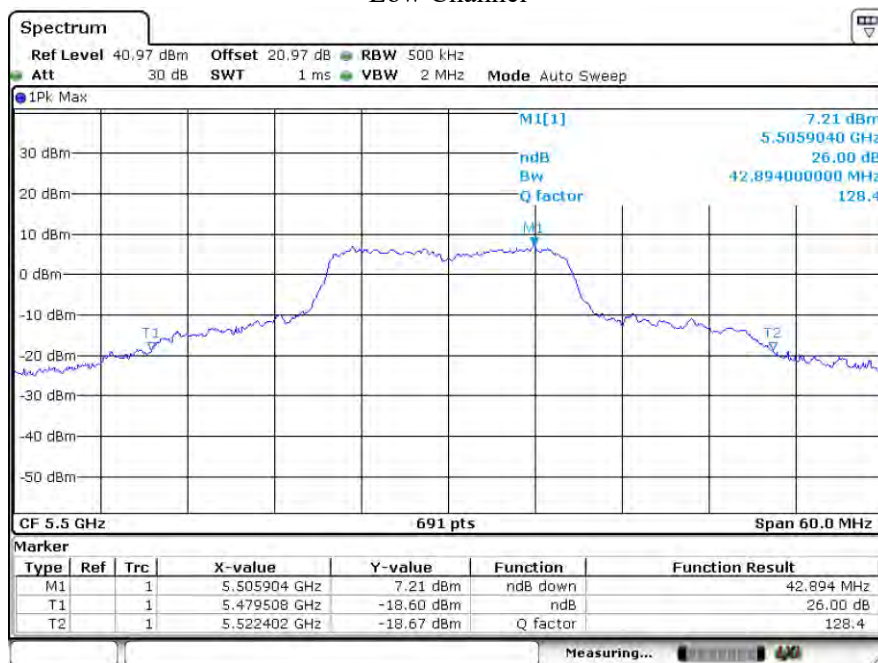

Date: 27 JUL 2022 13:53:58

99% Occupied Band Width


Mid Channel

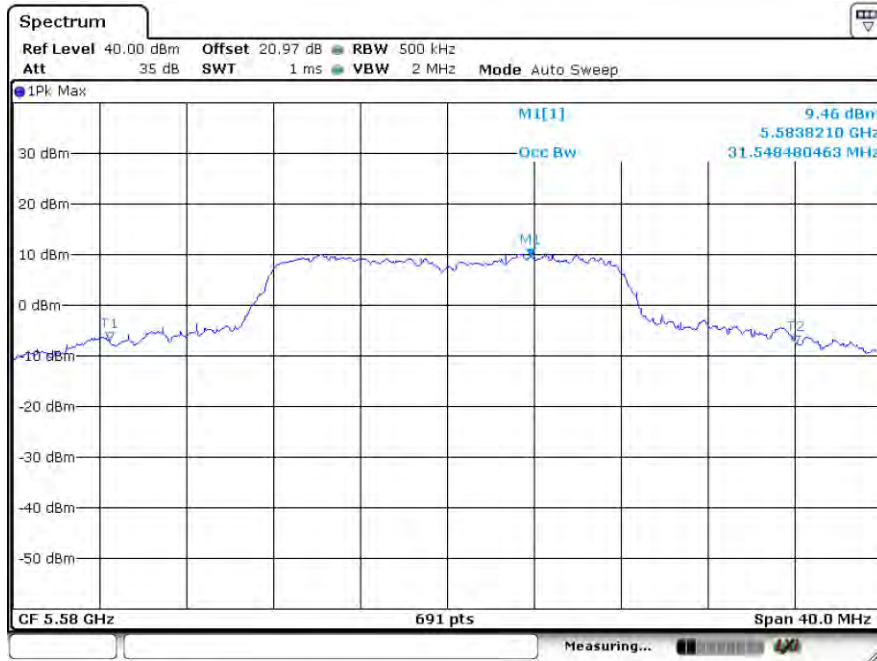

Date: 27 JUL 2022 16:02:46

26dB Occupied Band Width


Mid Channel

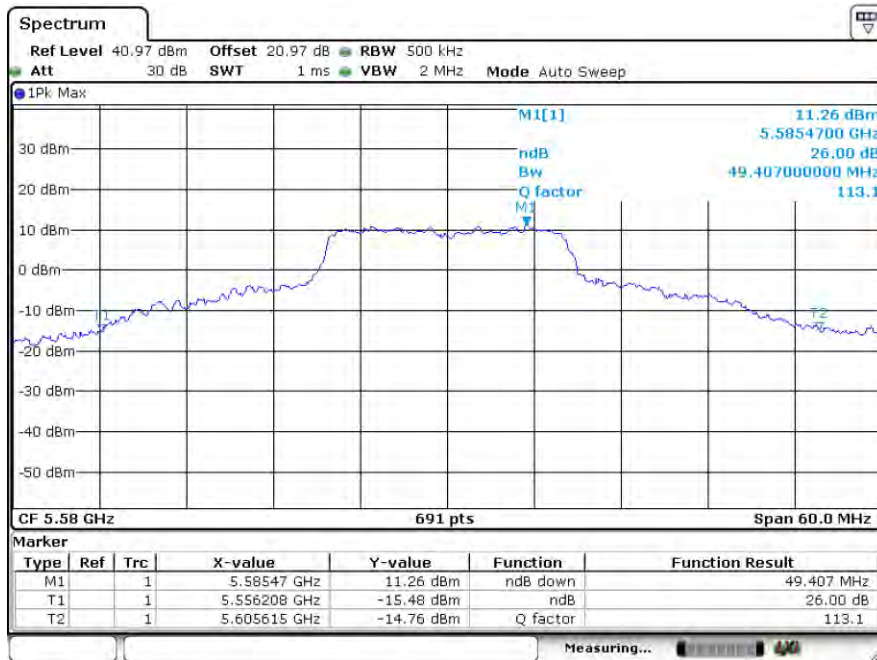

Date: 27 JUL 2022 14:00:04


99% Occupied Band Width

High Channel

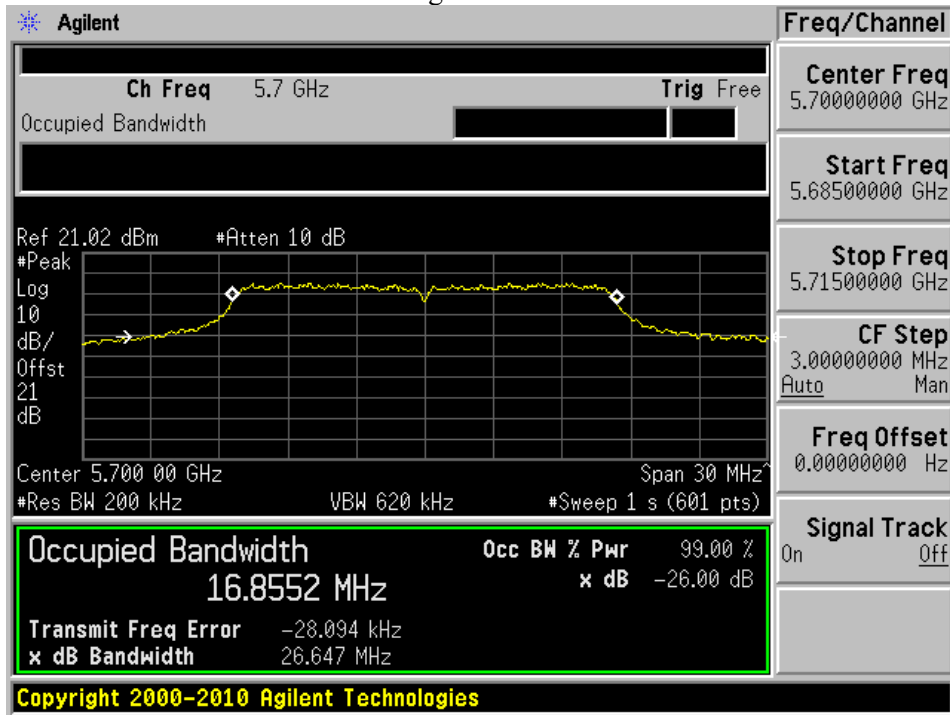

26dB Occupied Band Width

High Channel

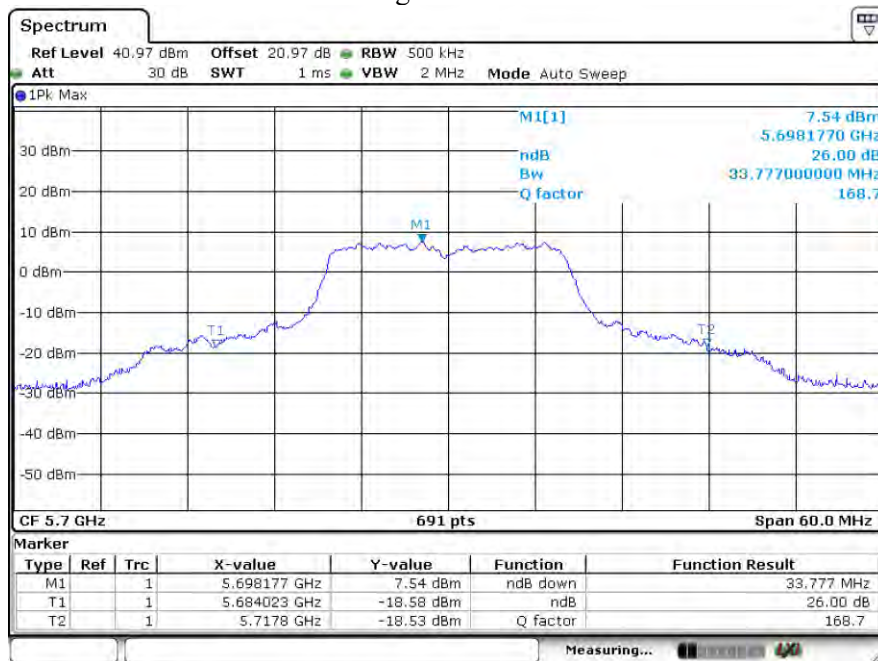


Date: 27 JUL 2022 14:02:39

5470 - 5725 MHz 802.11n20


99% Occupied Band Width

Low Channel

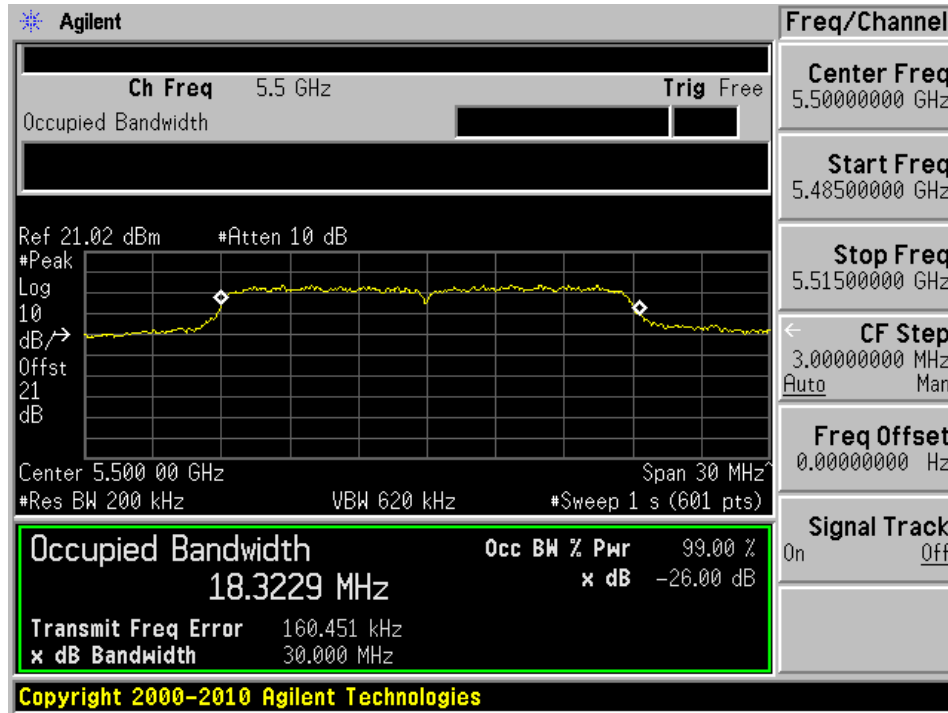

26dB Occupied Band Width


Low Channel

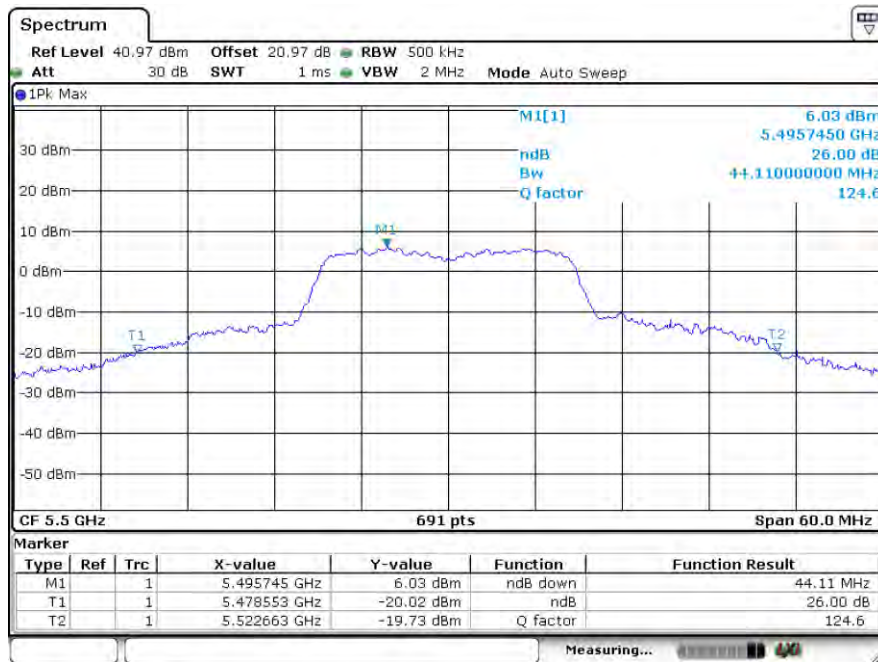

Date: 27 JUL 2022 14:26:27

99% Occupied Band Width


Mid Channel

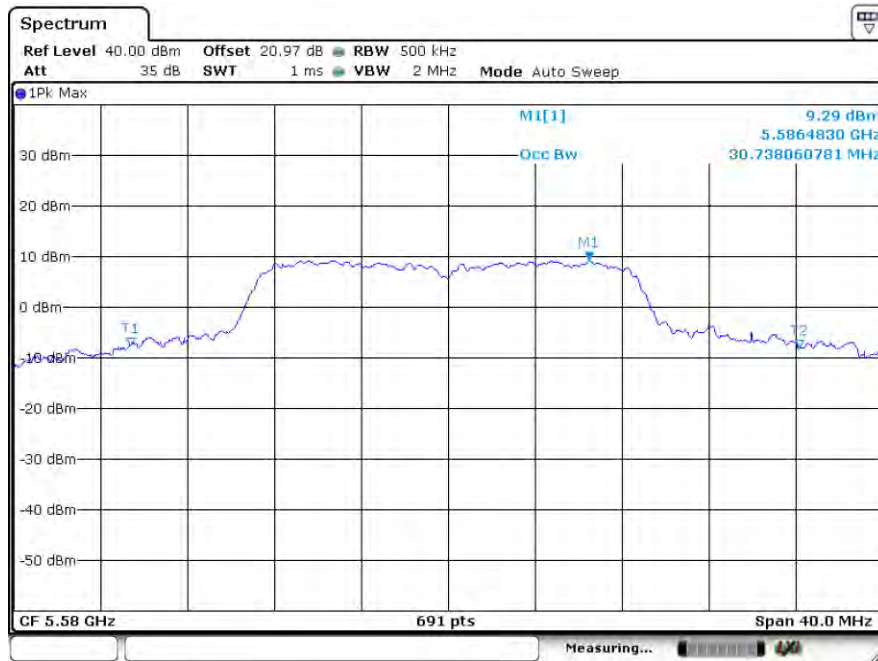

Date: 27 JUL 2022 16:06:09

26dB Occupied Band Width


Mid Channel

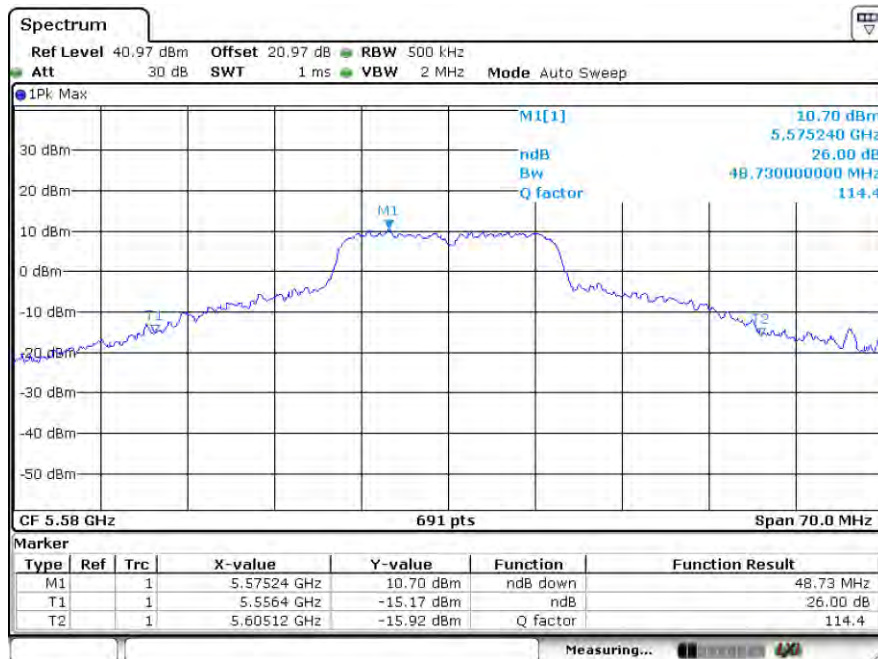

Date: 27 JUL 2022 14:28:33


99% Occupied Band Width

High Channel

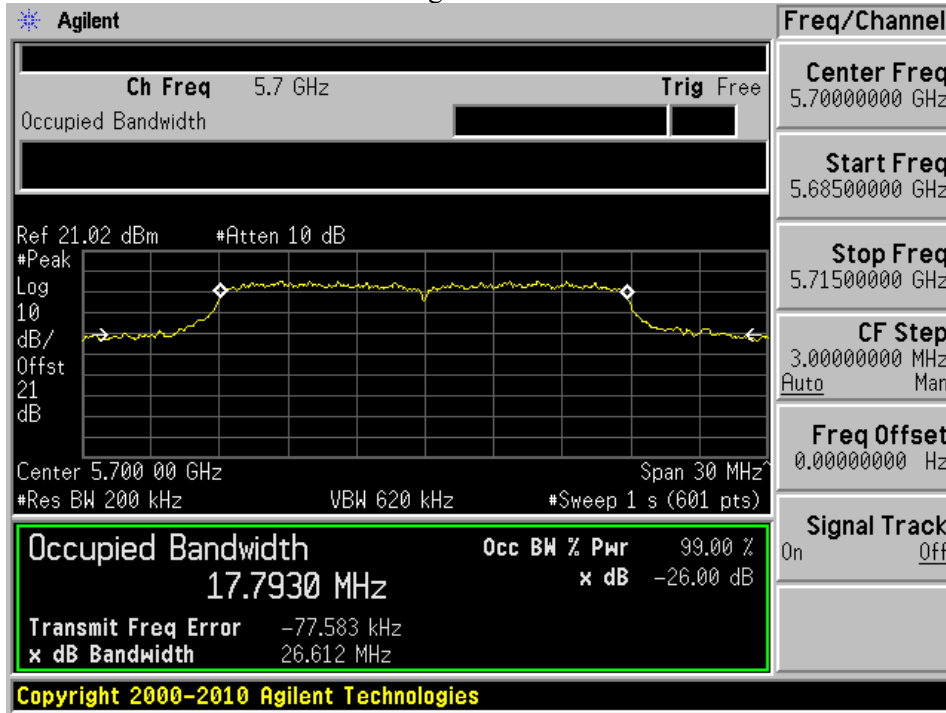

26dB Occupied Band Width

High Channel

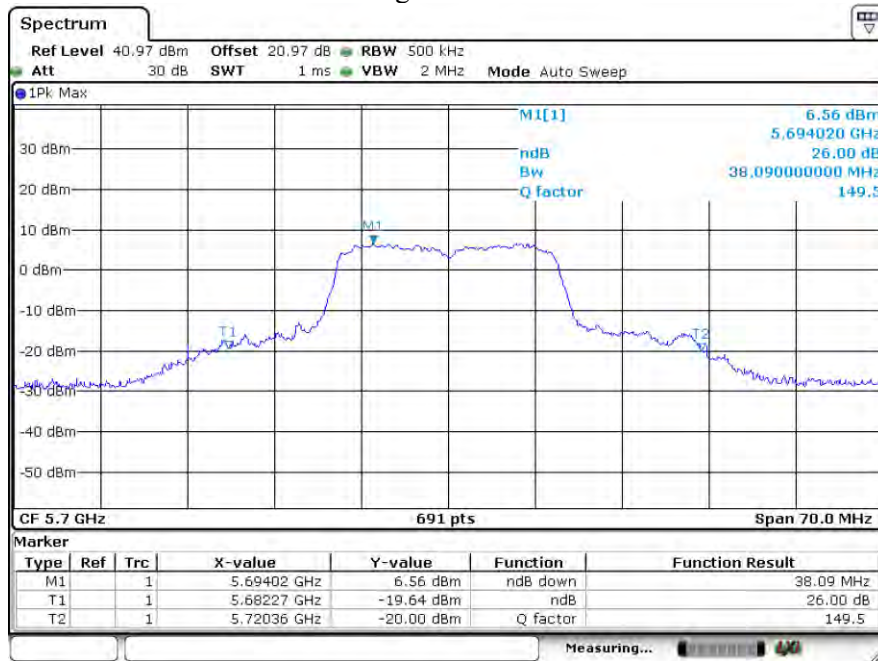


Date: 27 JUL 2022 14:30:04

5470 - 5725 MHz 802.11n40


99% Occupied Band Width

Low Channel

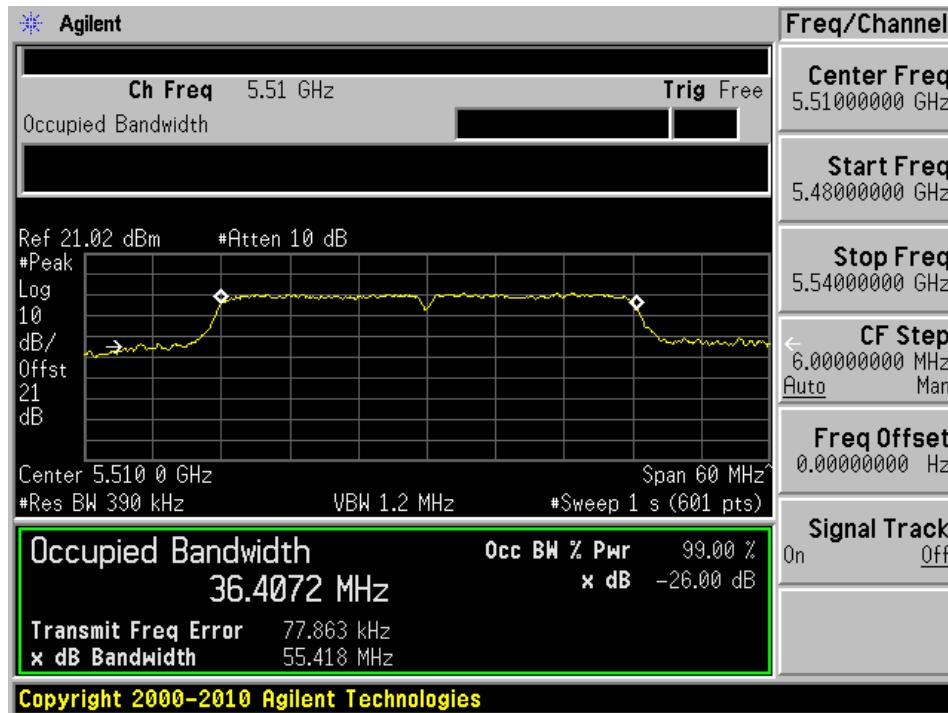

26dB Occupied Band Width

Low Channel

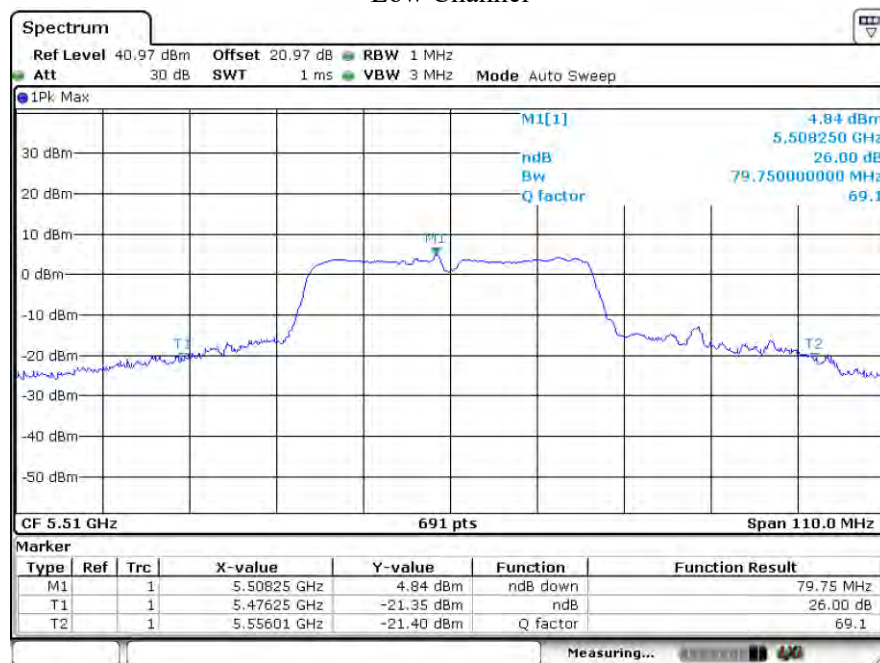

Date: 27 JUL 2022 14:55:52

99% Occupied Band Width

Mid Channel




26dB Occupied Band Width

Mid Channel




99% Occupied Band Width

High Channel

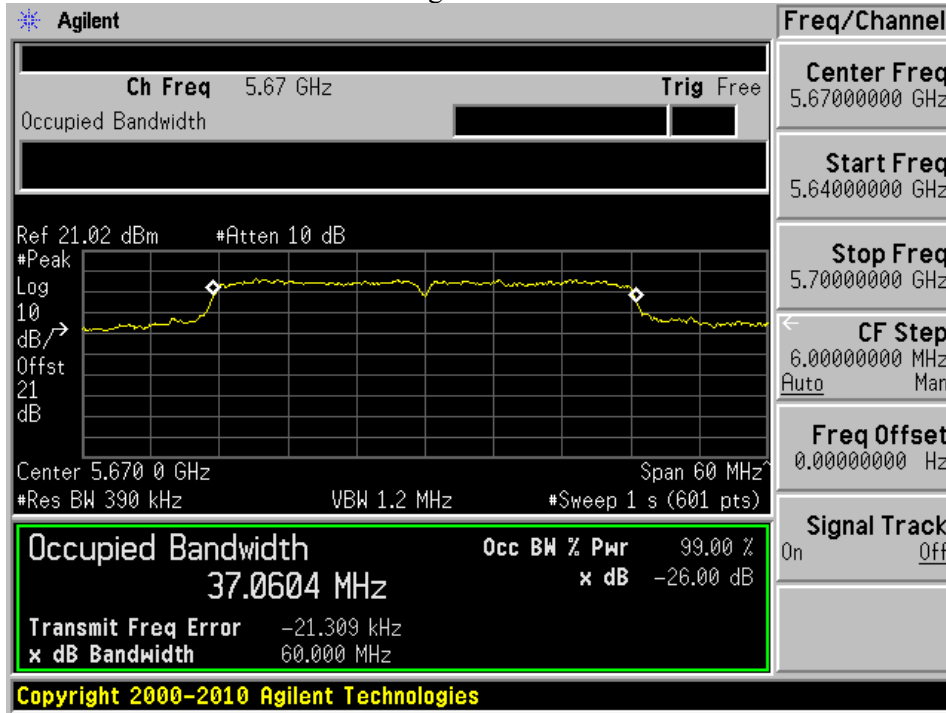

26dB Occupied Band Width

High Channel

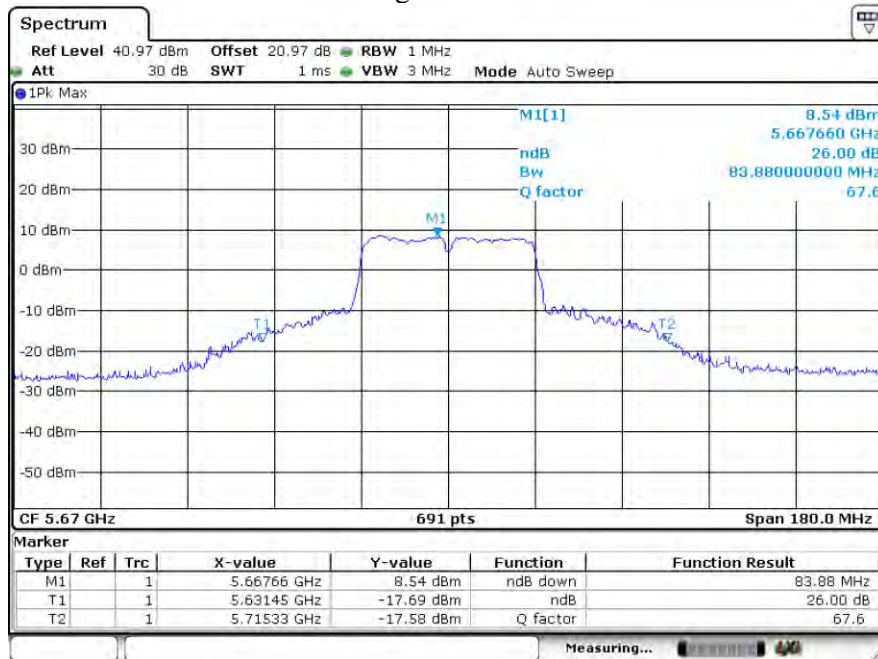


Date: 27 JUL 2022 15:10:58

5470 - 5725 MHz 802.11ac80


99% Occupied Band Width

Low Channel

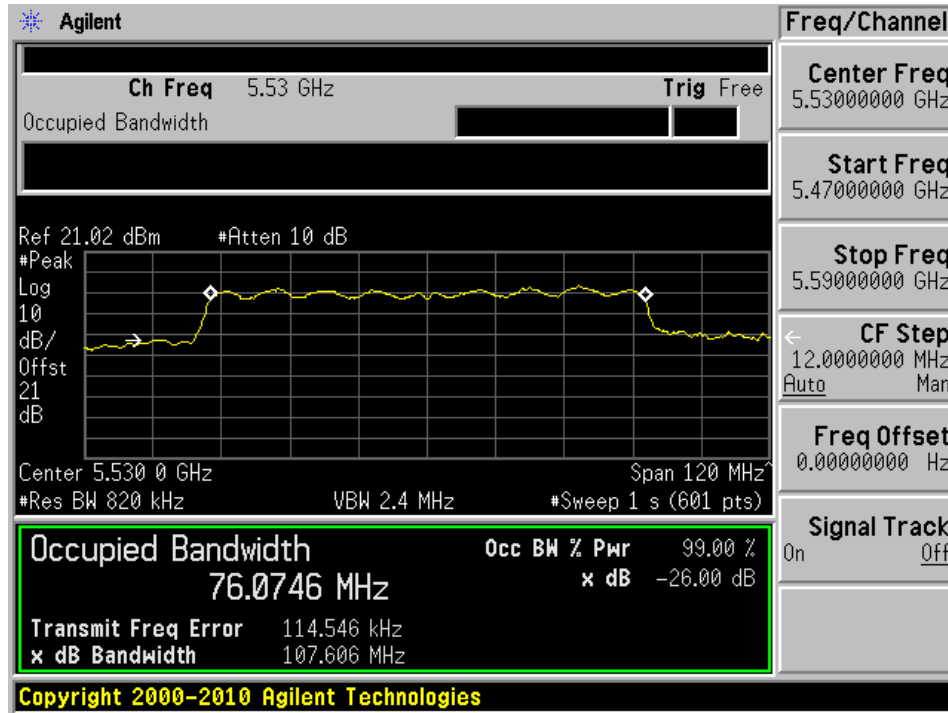

26dB Occupied Band Width


Low Channel

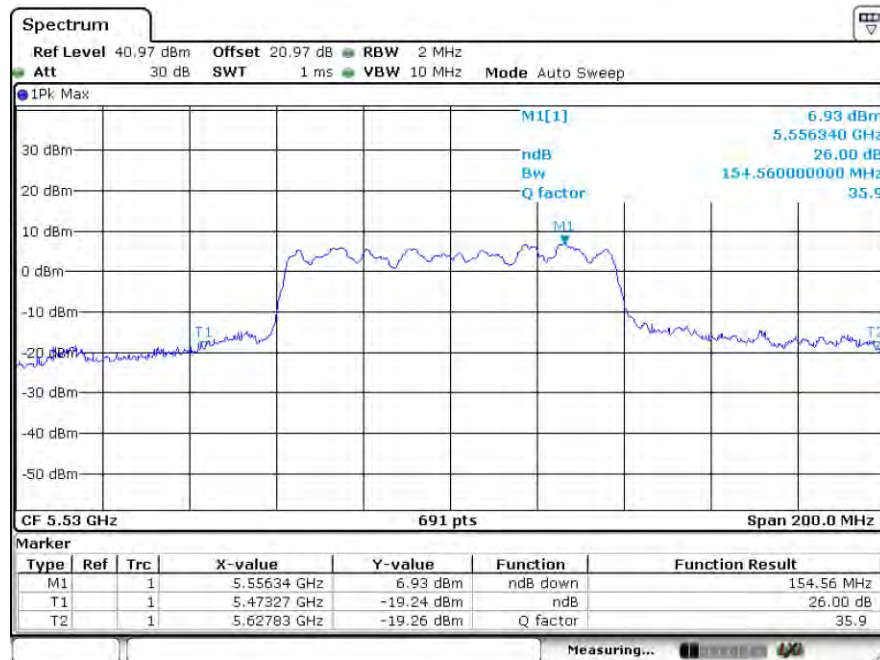

Date: 27 JUL 2022 15:21:47

99% Occupied Band Width


Mid Channel

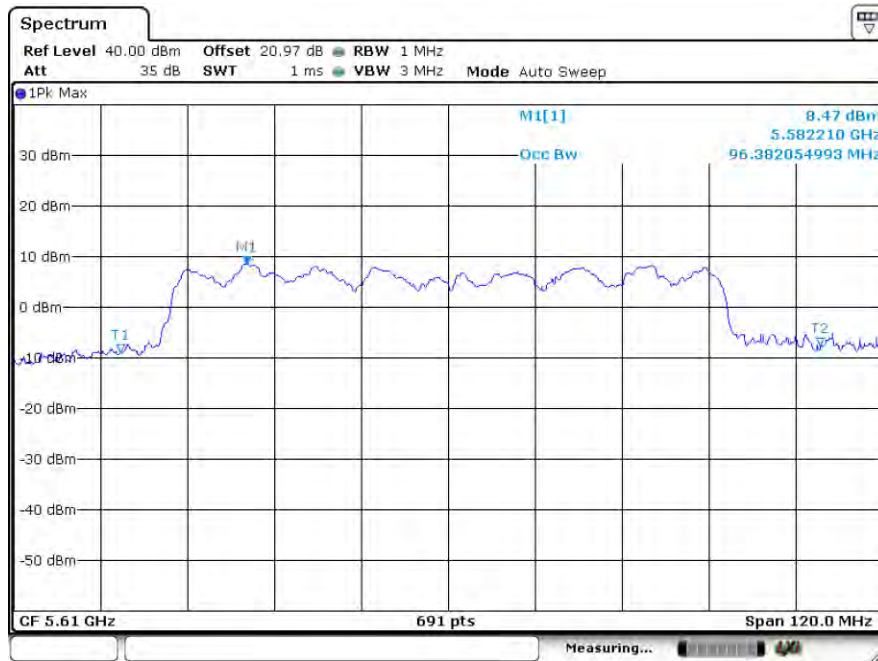

Date: 27 JUL 2022 16:12:01

26dB Occupied Band Width


Mid Channel

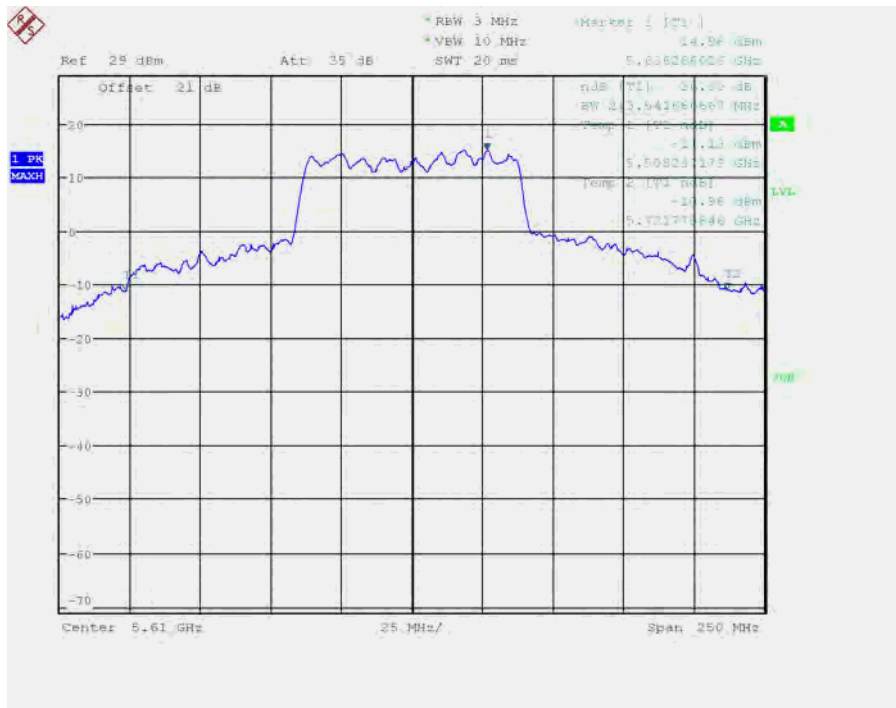

5725 - 5850 MHz 802.11a


99% Occupied Band Width

Low Channel

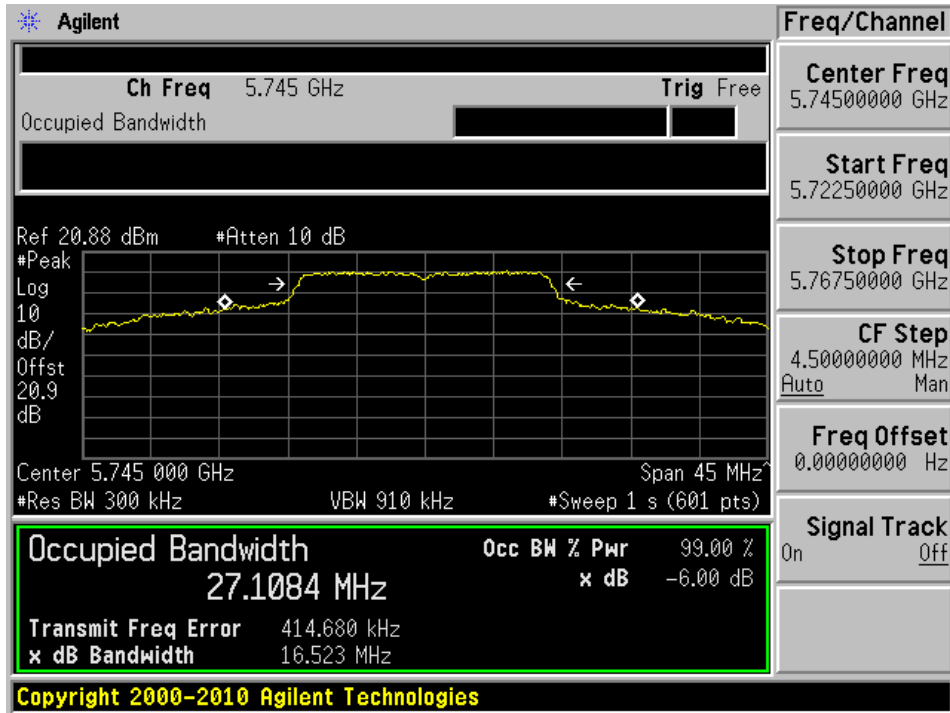


6dB Occupied Band Width

Low Channel

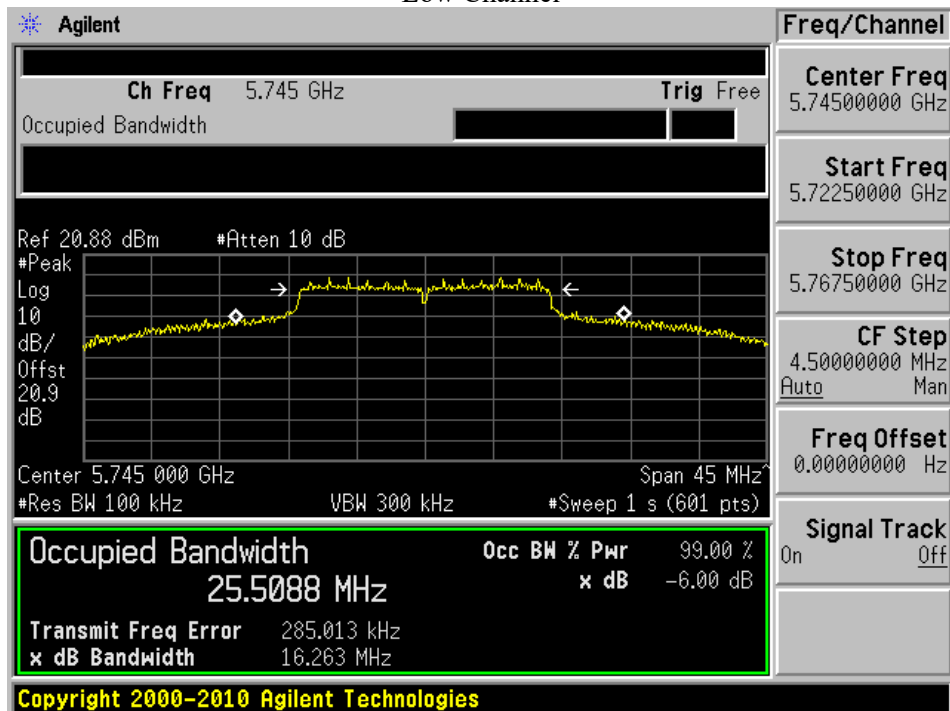


99% Occupied Band Width

Mid Channel

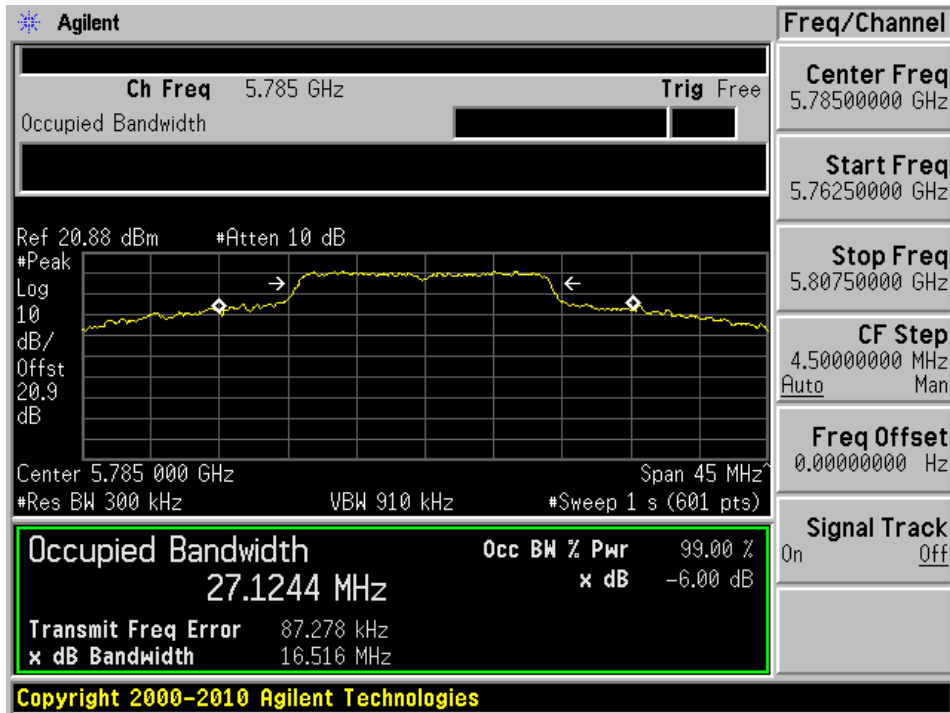


6dB Occupied Band Width

Mid Channel

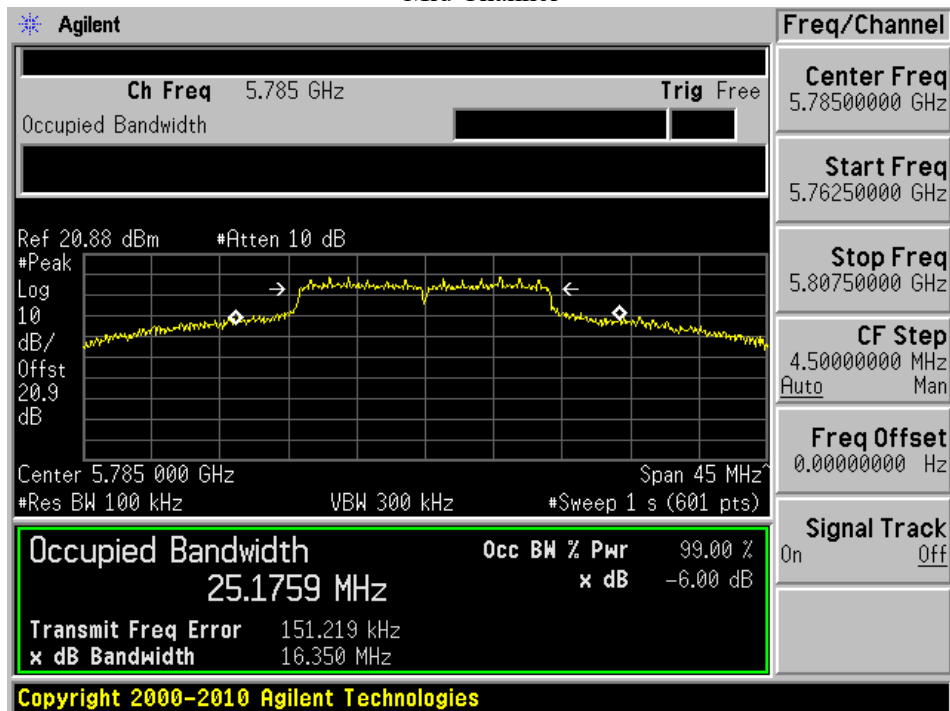


99% Occupied Band Width

High Channel

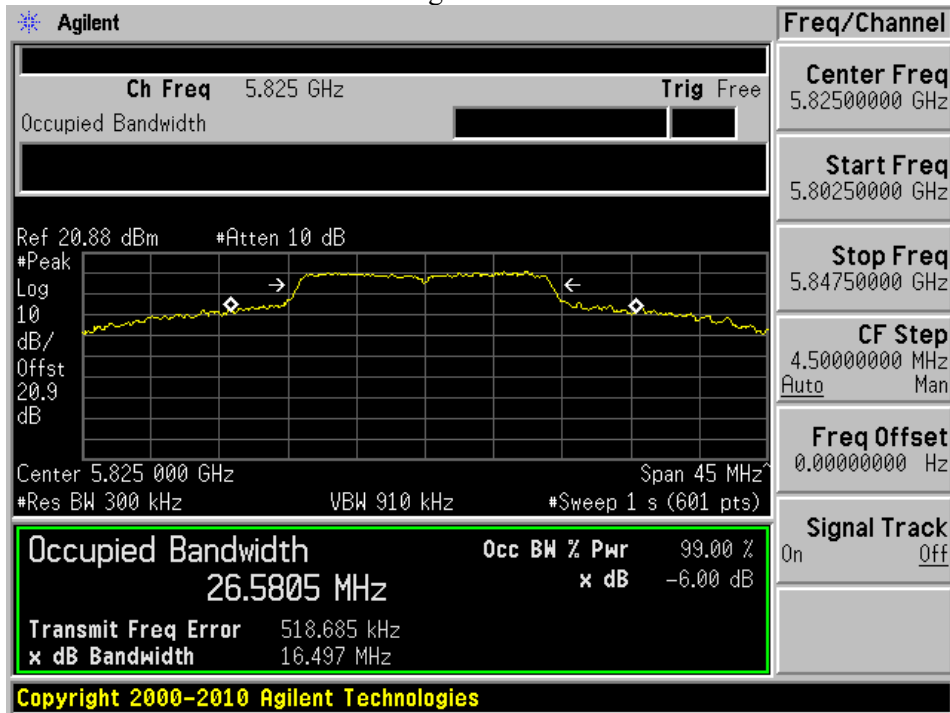

6dB Occupied Band Width


High Channel

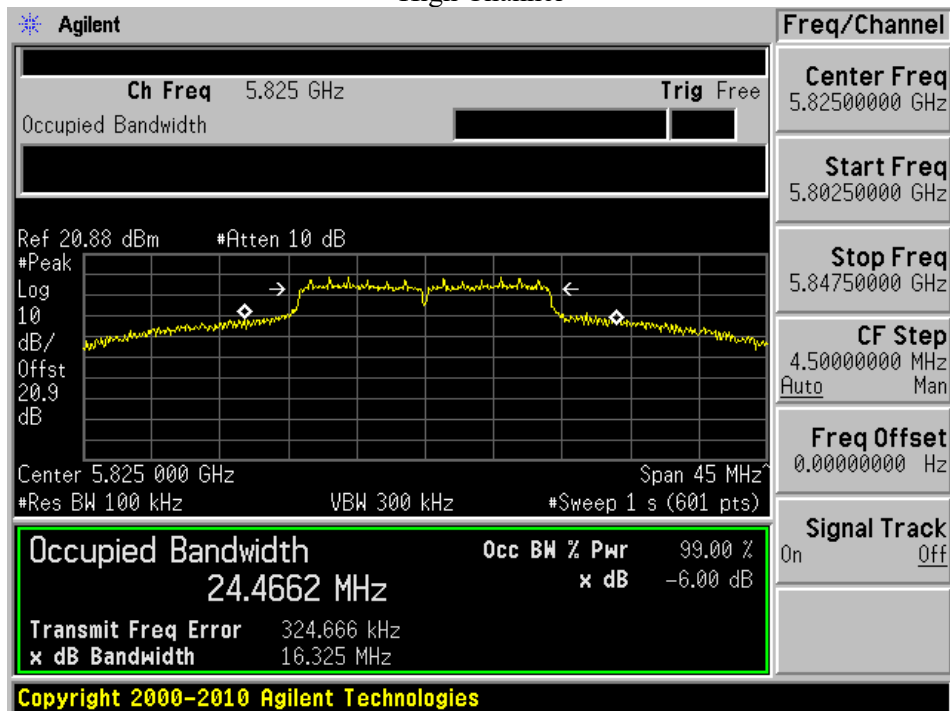

5725 - 5850 MHz 802.11n20


99% Occupied Band Width

Low Channel

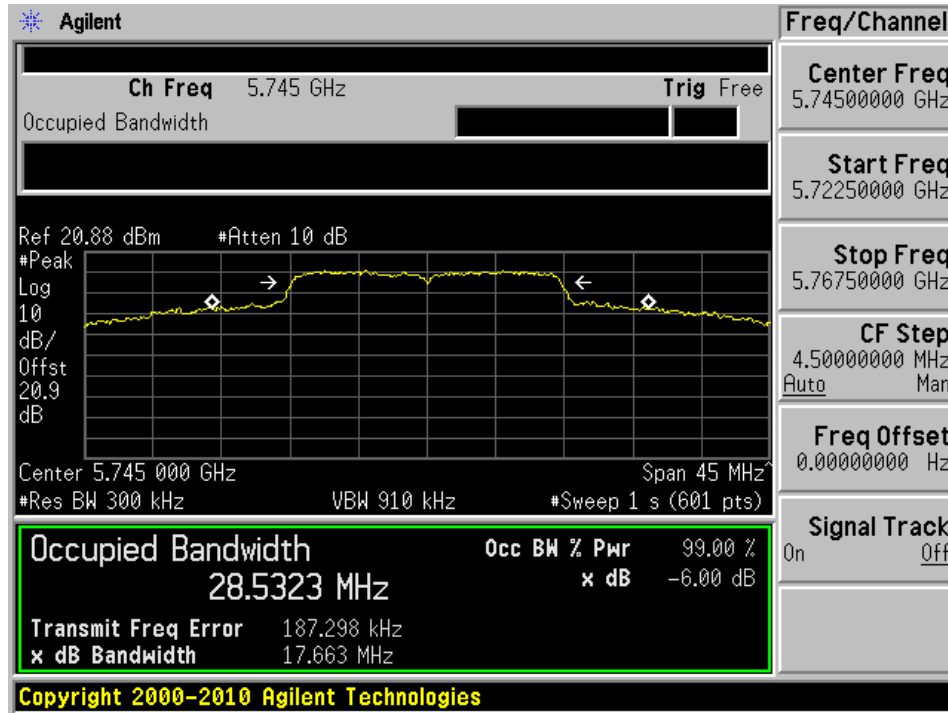


6dB Occupied Band Width

Low Channel

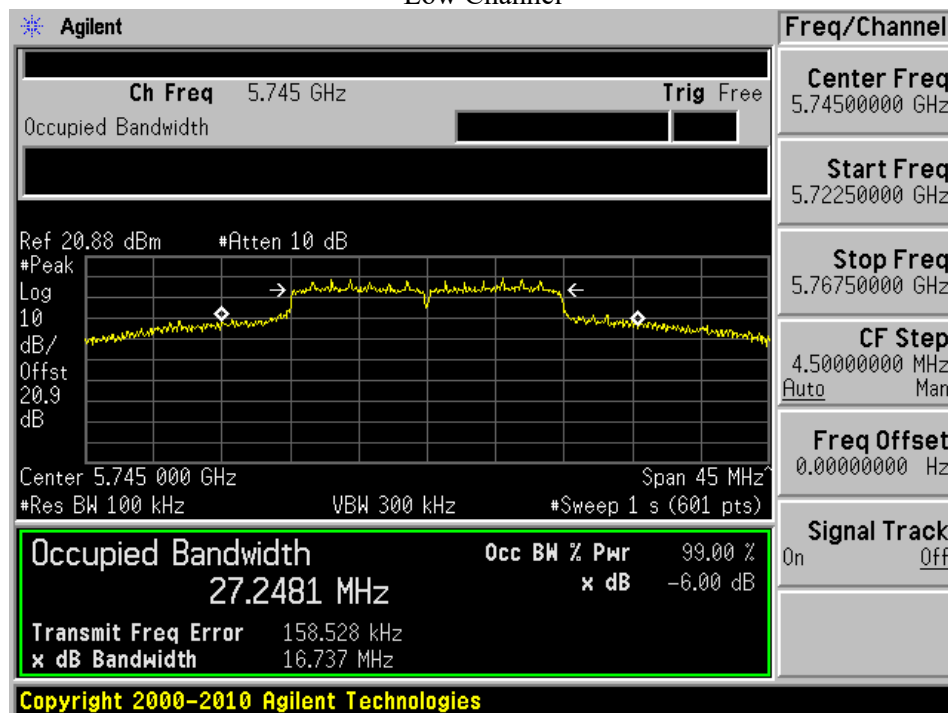


99% Occupied Band Width

Mid Channel

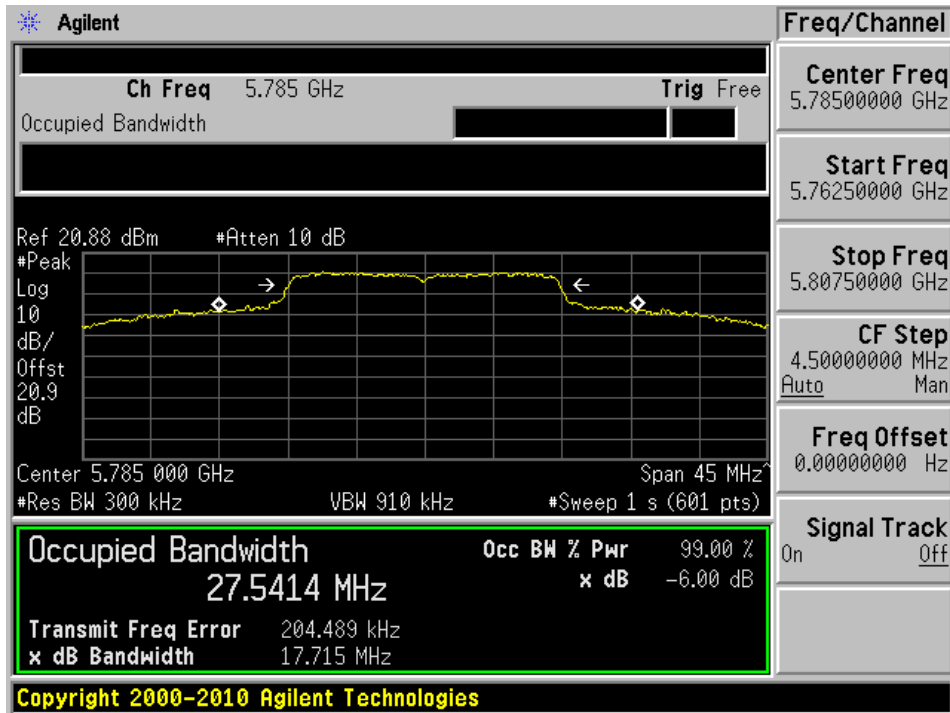


6dB Occupied Band Width

Mid Channel

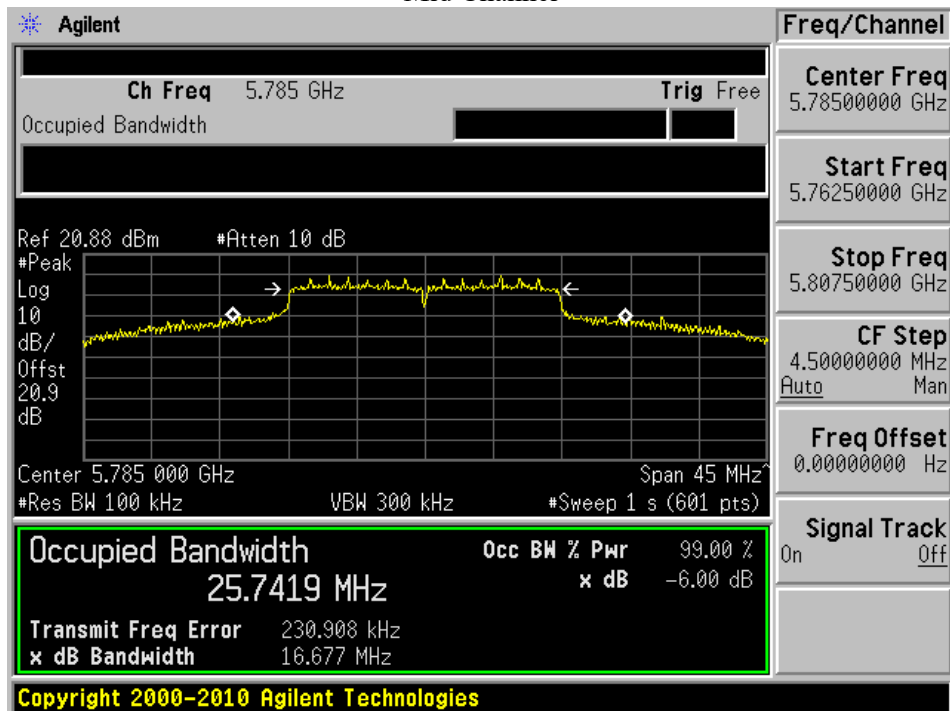


99% Occupied Band Width

High Channel

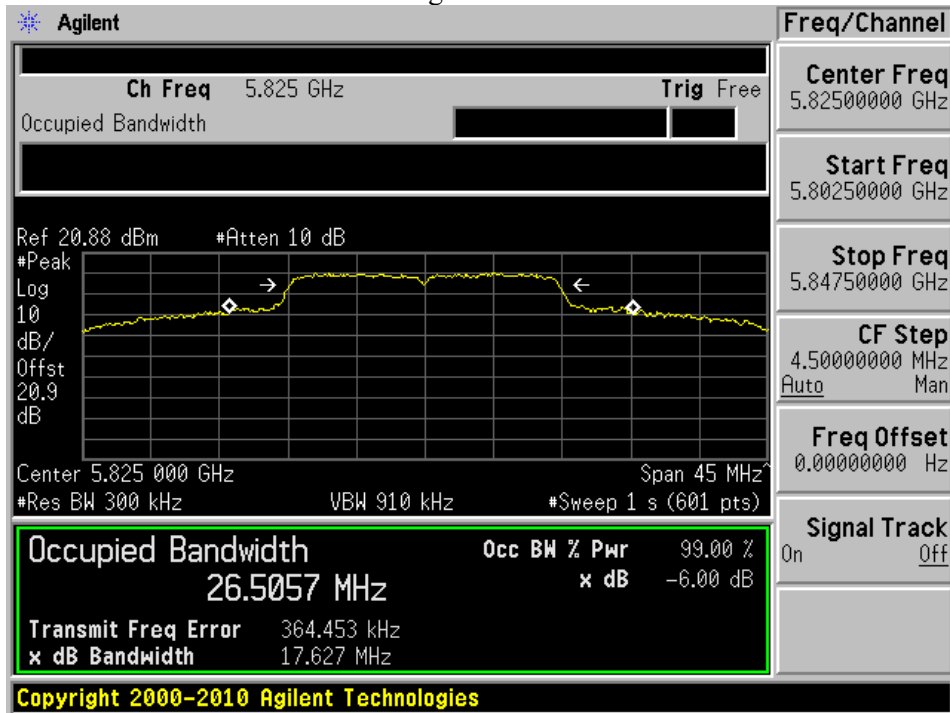

6dB Occupied Band Width


High Channel

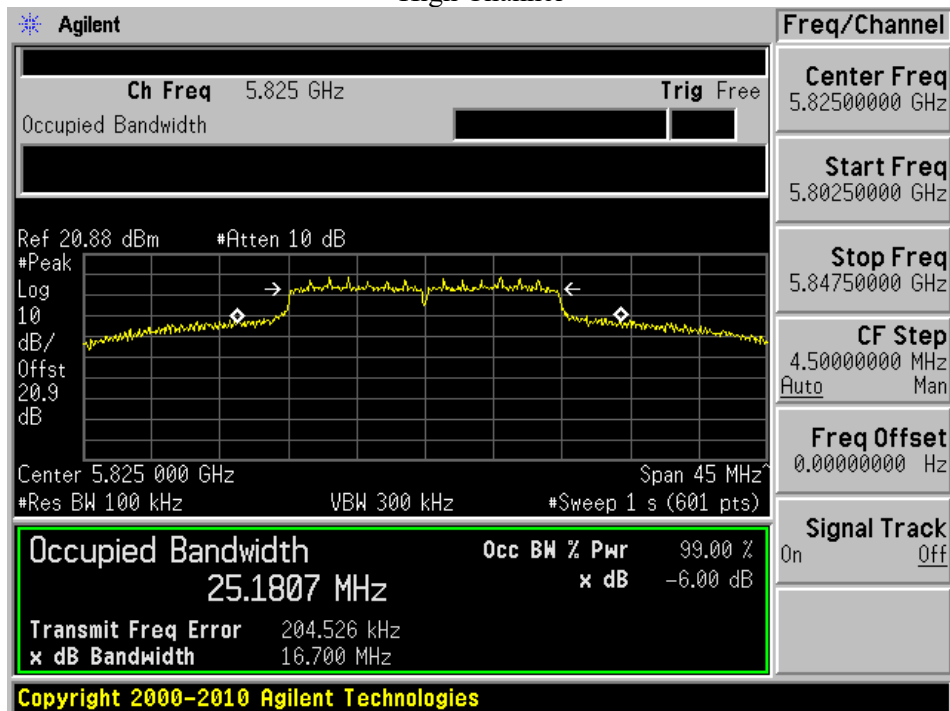

5725 - 5850 MHz 802.11n40


99% Occupied Band Width

Low Channel

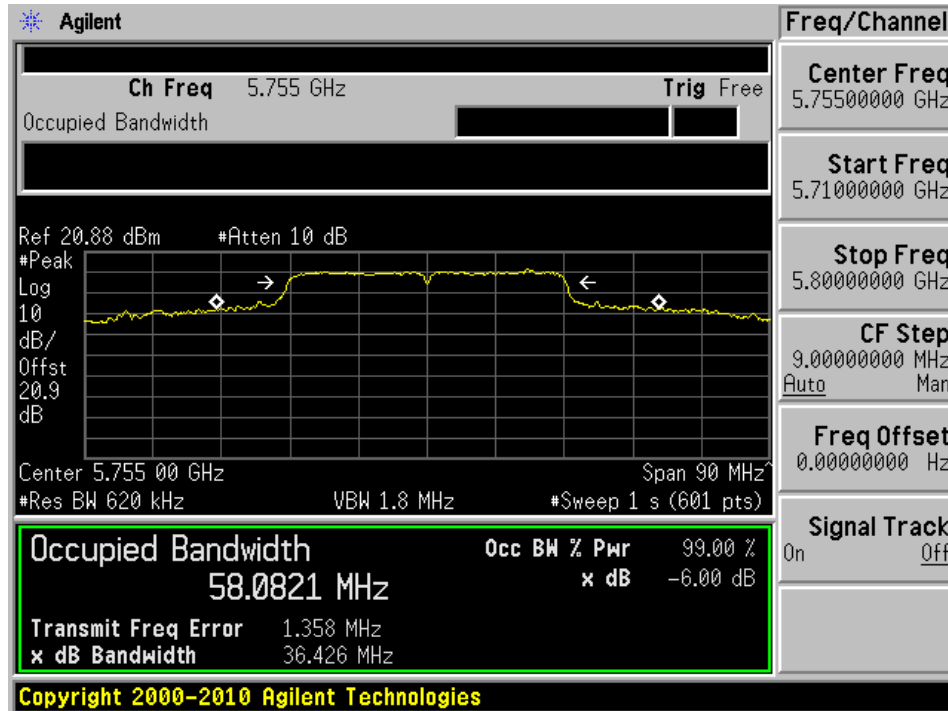


6dB Occupied Band Width

Low Channel

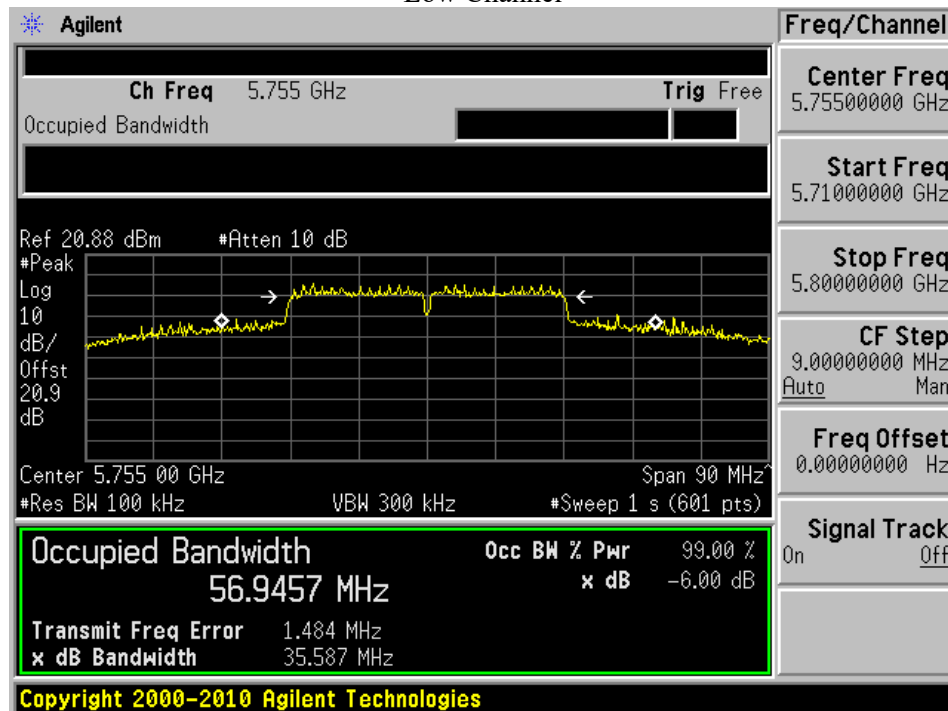


99% Occupied Band Width

Mid Channel

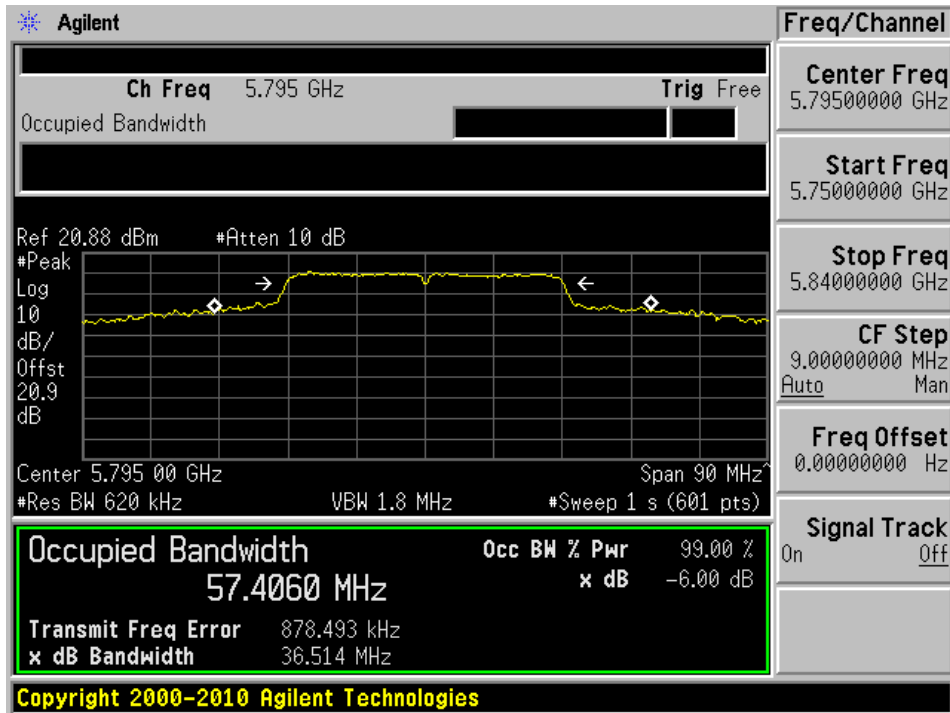

6dB Occupied Band Width


Mid Channel

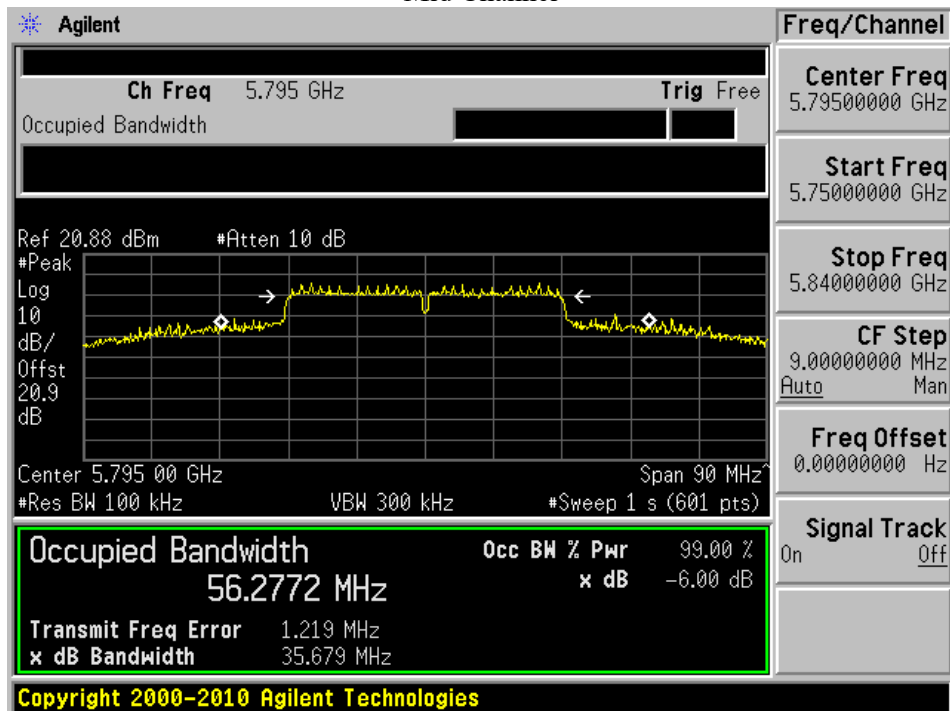

5725 - 5850 MHz 802.11ac80


99% Occupied Band Width

Low Channel

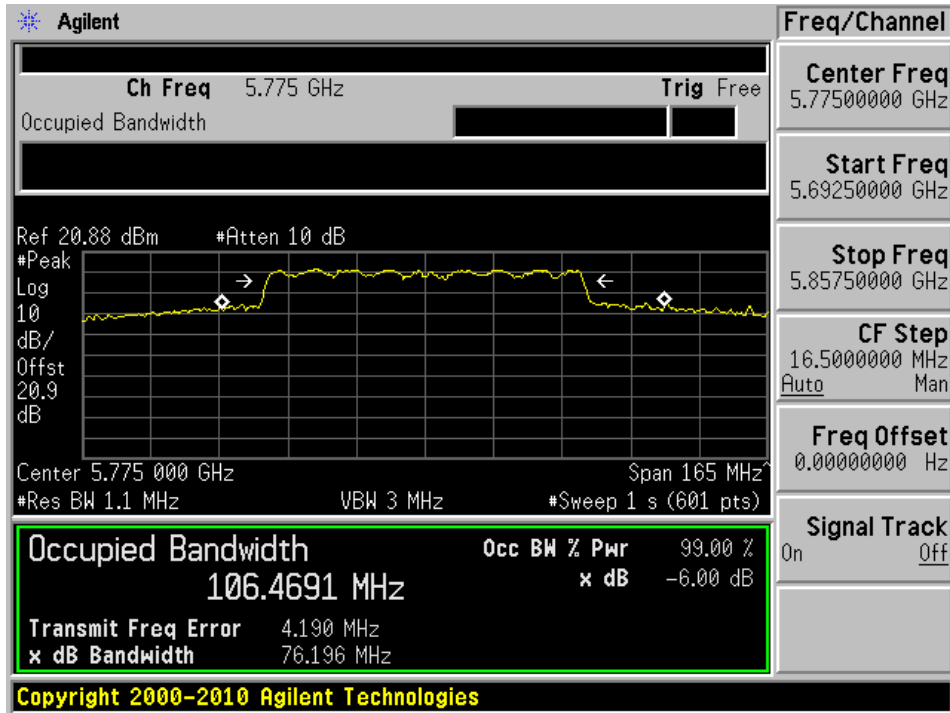

6dB Occupied Band Width

Low Channel

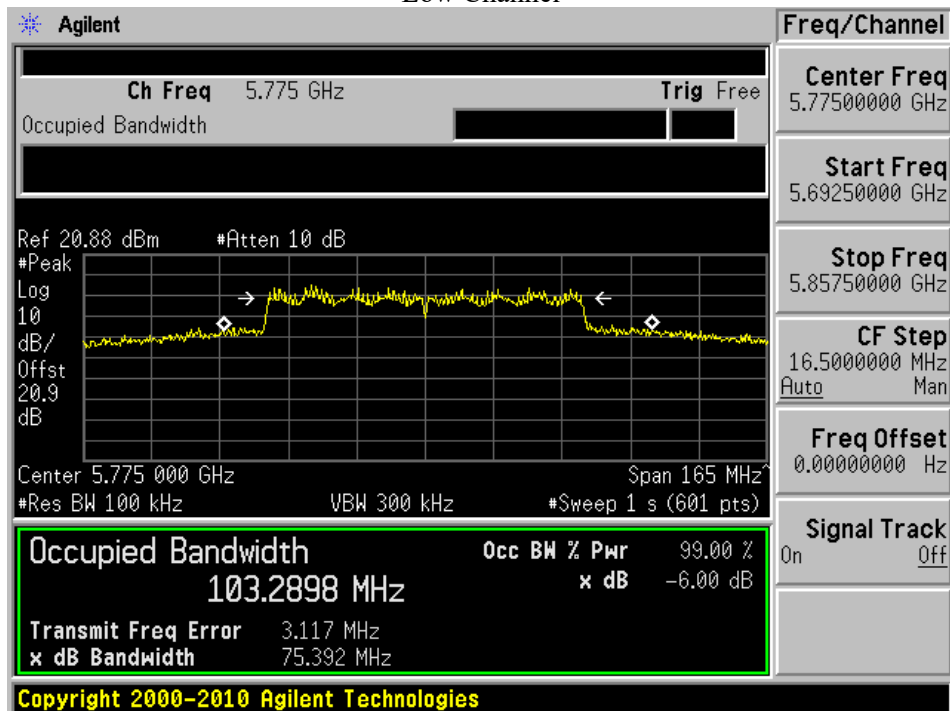

9 FCC §407(a) & ISEDC RSS-247 §6.2 - Output Power

9.1 Applicable Standards

According to FCC §15.407(a):

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

According to ISEDC RSS-247 §6.2.1 for frequency band 5150-5250 MHz:

The maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

According to ISEDC RSS-247 §6.2.2 for frequency band 5250-5350 MHz:

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

According to ISEDC RSS-247 §6.2.3 for frequency band 5470-5600 MHz and 5650-5725 MHz:

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.


According to ISEDC RSS-247 §6.2.4 for frequency band 5725-5850 MHz:

The maximum conducted output power shall not exceed 1 W. The power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

9.2 Measurement Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to a power meter.

9.3 Test Setup Block Diagram

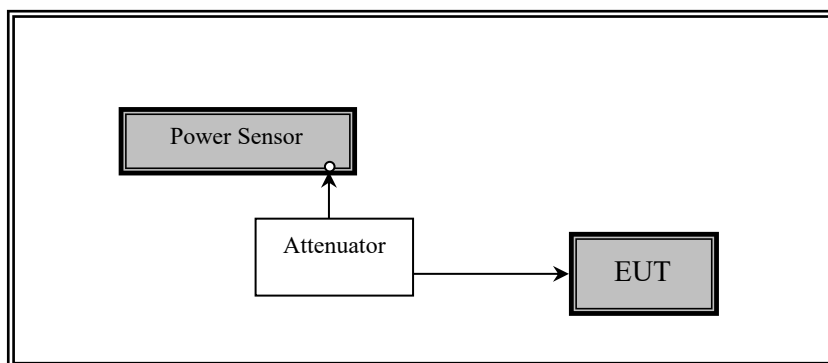

9.4 Test Equipment List and Details

BACL Number	Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Interval
-	-	20dB attenuator	-	-	Each time ¹	N/A
-	-	RF cable	-	-	Each time ¹	N/A
697	ETS- Lindgren	Power Sensor	7002-006	160097	2021-02-12	2 years

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 "A2LA Policy on Metrological Traceability".

9.5 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	55 %
ATM Pressure:	102.2 KPa

Testing was performed by Christian Schwartz from 2022-07-08 to 2022-07-28 at the RF site.

9.6 Test Results

5150 - 5250 MHz

FCC Results:

Channel	Frequency (MHz)	Conducted Output Power (dBm)	FCC Limit (dBm)
802.11a mode			
36	5180	16.55	24
44	5220	16.71	24
48	5240	16.89	24
802.11n/ac20 mode			
36	5180	17.11	24
44	5220	16.78	24
48	5240	16.87	24
802.11n/ac40 mode			
38	5190	15.43	24
46	5230	16.83	24
802.11ac80 mode			
42	5210	15.54	24

IC Results:

Channel	Frequency (MHz)	EIRP (dBm)	IC Limit (dBm)
802.11a mode			
36	5180	19.55	22.2
44	5220	19.71	22.2
48	5240	19.89	22.2
802.11n/ac20 mode			
36	5180	20.11	22.2
44	5220	19.78	22.2
48	5240	19.87	22.2
802.11n/ac40 mode			
38	5190	18.43	22.2
46	5230	19.83	22.2
802.11ac80 mode			
42	5210	18.54	22.2

Note: Total EIRP (dBm) = Conducted Output Power + Antenna Gain (dBi) Note: Duty cycle correction factor has already been added to the measurements Note: IC limit is determined by formula: $10 + 10 \log_{10} B$, dBm, where B is the 99% emission bandwidth in megahertz. In this instance B was chosen to be the lowest measured BW rounded down to represent the worst case limit.

5250 - 5350 MHz

Channel	Frequency (MHz)	Conducted Output Power (dBm)	FCC/IC Limit (dBm)
802.11a mode			
52	5260	16.11	23
56	5280	15.78	23
64	5320	14.49	23
802.11n/ac20 mode			
52	5260	18.31	23
56	5280	18.3	23
64	5320	17.2	23
802.11n/ac40 mode			
54	5270	16.22	23
62	5310	11.27	23
802.11ac80 mode			
58	5290	10.47	23

Note: Duty cycle correction factor has already been added to the measurements

Note: For 5250MHz-5350MHz for FCC: the maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10}B$, dBm, whichever is less. Here B is the 26dB bandwidth in megahertz. In this instance B was chosen to be the lowest measured BW rounded down to represent the worst case limit.

Note: For 5250MHz-5350MHz for IC: the maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10}B$, dBm, whichever is less. Here B is the 99% emission bandwidth in megahertz. In this instance B was chosen to be the lowest measured BW rounded down to represent the worst case limit.

5470MHz - 5725 MHz

Channel	Frequency (MHz)	Conducted Output Power (dBm)	FCC/IC Limit (dBm)
802.11a mode			
100	5500	12.31	23
116	5580	18.21	23
140	5700	15.24	23
802.11n/ac20 mode			
100	5500	14.53	23
116	5580	18.59	23
140	5700	15.38	23
802.11n/ac40 mode			
102	5510	8.41	23
118	5590	15.82	23
134	5670	14.81	23
802.11ac80 mode			
106	5530	9.34	23
122	5610	16.93	23

Note: Duty cycle correction factor has already been added to the measurements

Note: For 5470MHz-5725MHz for FCC: the maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10}B$, dBm, whichever is less. Here B is the 26dB bandwidth in megahertz. In this instance B was chosen to be the lowest measured BW rounded down to represent the worst case limit.

Note: For 5470MHz-5725MHz for IC: the maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10}B$, dBm, whichever is less. Here B is the 99% emission bandwidth in megahertz. In this instance B was chosen to be the lowest measured BW rounded down to represent the worst case limit.

5725 - 5850 MHz

Channel	Frequency (MHz)	Conducted Output Power (dBm)	FCC/IC Limit (dBm)
802.11a mode			
149	5745	18.55	30
157	5785	18.22	30
165	5825	17.91	30
802.11n/ac20 mode			
149	5745	18.52	30
157	5785	18.29	30
165	5825	18.05	30
802.11n/ac40 mode			
151	5755	18.65	30
159	5795	18.7	30
802.11ac80 mode			
155	5775	18.57	30

Note: Duty cycle correction factor has already been added to the measurements

10 FCC §15.407(a) & ISEDC RSS-247 §6.2 - Power Spectral Density

10.1 Applicable Standards

According to FCC §15.407(a):

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

According to ISEDC RSS-247 §6.2.1 for frequency band 5150-5250 MHz:

The maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

According to ISEDC RSS-247 §6.2.2 for frequency band 5250-5350 MHz:

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

According to ISEDC RSS-247 §6.2.3 for frequency band 5470-5600 MHz and 5650-5725 MHz:

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.


According to ISEDC RSS-247 §6.2.4 for frequency band 5725-5850 MHz:

The maximum conducted output power shall not exceed 1 W. The power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

10.2 Measurement Procedure

- (i) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- (ii) Set RBW = 1 MHz.
- (iii) Set VBW \geq 3 MHz.
- (iv) Number of points in sweep \geq 2 Span / RBW. (This ensures that bin-to-bin spacing is \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
- (v) Sweep time = auto.
- (vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- (vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle \geq 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.
- (viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- (ix) Compute power by integrating the spectrum across the 26 dB EBW of the signal using the spectrum analyzer’s band power measurement function with band limits set equal to the EBW band edges. If the spectrum analyzer does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the 26 dB EBW of the spectrum.

10.3 Test Setup Block Diagram

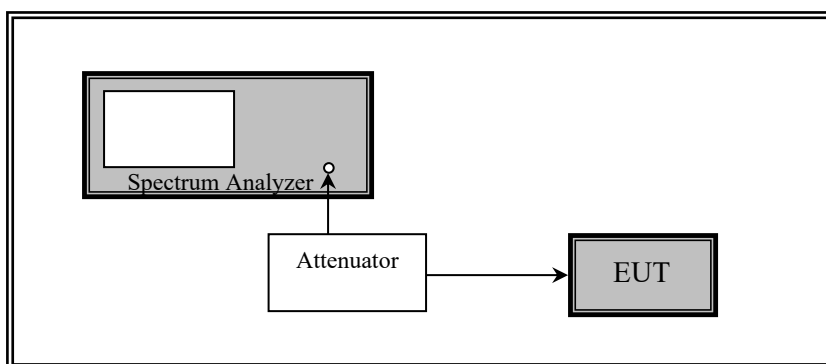

10.4 Test Equipment List and Details

BACL Number	Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Interval
287	Agilent	Signal Analyzer	E4446 A	US44300386	2022-05-05	1 year
-	-	20dB attenuator	-	-	Each time ¹	N/A
-	-	RF cable	-	-	Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 "A2LA Policy on Metrological Traceability".*

10.5 Test Environmental Conditions

Temperature:	22-24 °C
Relative Humidity:	50-55 %
ATM Pressure:	102.1-102.7 kPa

Testing was performed by Christian Schwartz from 2022-07-08 to 2022-07-28 at the RF site.

10.6 Test Results**5150 - 5250 MHz****FCC Results:**

Channel	Frequency (MHz)	Conducted PSD(dBm/MHz)	Corrected PSD (dBm/MHz)	FCC Limit (dBm/MHz)
802.11a mode				
36	5180	5.984	5.984	11
44	5220	5.562	5.562	11
48	5240	5.964	5.964	11
802.11n/ac20 mode				
36	5180	5.925	6.325	11
44	5220	5.328	5.725	11
48	5240	5.601	6.001	11
802.11n/ac40 mode				
38	5190	1.318	2.278	11
46	5230	4.219	5.179	11
802.11ac80 mode				
42	5210	.957	2.257	11

IC Results:

Channel	Frequency (MHz)	Conducted PSD(dBm/MHz)	EIRP PSD (dBm/MHz)	Corrected EIRP PSD(dBm/MHz)	IC Limit (dBm/MHz)
802.11a mode					
36	5180	5.984	8.984	8.984	10
44	5220	5.562	8.562	8.562	10
48	5240	5.964	8.964	8.964	10
802.11n/ac20 mode					
36	5180	5.925	8.925	9.325	10
44	5220	5.328	8.328	8.728	10
48	5240	5.601	8.601	9.001	10
802.11n/ac40 mode					
38	5190	1.318	4.318	5.278	10
46	5230	4.219	7.219	8.179	10
802.11ac80 mode					
42	5210	.957	3.957	5.257	10

Note: Corrected PSD (dBm/MHz) = Conducted PSD(dBm/MHz) + Duty Cycle Correction Factor(dB)

Note: Corrected EIRP PSD (dBm/MHz) = Conducted PSD(dBm/MHz) + Duty Cycle Correction Factor(dB) + Antenna Gain(dBi)

5250 - 5350 MHz

Channel	Frequency (MHz)	PSD (dBm/MHz)	Corrected PSD(dBm/MHz)	FCC/IC Limit (dBm/ MHz)
802.11a mode				
52	5260	7.317	7.317	11
56	5280	7.264	7.264	11
64	5320	6.195	6.195	11
802.11n/ac20 mode				
52	5260	7.149	7.549	11
56	5280	7.101	7.501	11
64	5320	6.243	6.643	11
802.11n/ac40 mode				
54	5270	3.828	4.788	11
62	5310	-.754	.206	11
802.11ac80 mode				
58	5290	-4.27	-2.97	11

5470MHz - 5725 MHz

Channel	Frequency (MHz)	PSD (dBm/MHz)	Corrected PSD(dBm/MHz)	FCC/IC Limit (dBm/ MHz)
802.11a mode				
100	5500	3.523	3.523	11
116	5580	7.79	7.79	11
140	5700	4.581	4.581	11
802.11n/ac20 mode				
100	5500	3.386	3.786	11
116	5580	7.662	8.062	11
140	5700	4.231	4.631	11
802.11n/ac40 mode				
102	5510	-2.617	-1.657	11
118	5590	4.593	5.553	11
134	5670	2.491	3.37	11
802.11ac80 mode				
106	5530	-3.837	-2.237	11
122	5610	2.3	3.6	11

Note: Corrected PSD (dBm/MHz) = Conducted PSD(dBm/MHz) + Duty Cycle Correction Factor(dB)


5725 - 5850 MHz

Channel	Frequency (MHz)	PSD (dBm/100 kHz)	Corrected PSD(dBm/500 kHz)	FCC/IC Limit (dBm/500 kHz)
802.11a mode				
149	5745	-.569	6.431	30
157	5785	-.79	6.21	30
165	5825	-.881	6.119	30
802.11n/ac20 mode				
149	5745	-.0066	7.0466	30
157	5785	-.817	6.583	30
165	5825	-.947	6.453	30
802.11n/ac40 mode				
151	5755	-3.876	4.084	30
159	5795	-4.221	3.739	30
802.11ac80 mode				
155	5775	-6.832	1.128	30


Note: Corrected PSD (dBm/MHz) = Conducted PSD(dBm/MHz) + Duty Cycle Correction Factor(dB) + 10log(500kHz/100kHz)

5150 - 5250 MHz 802.11a


Low Channel

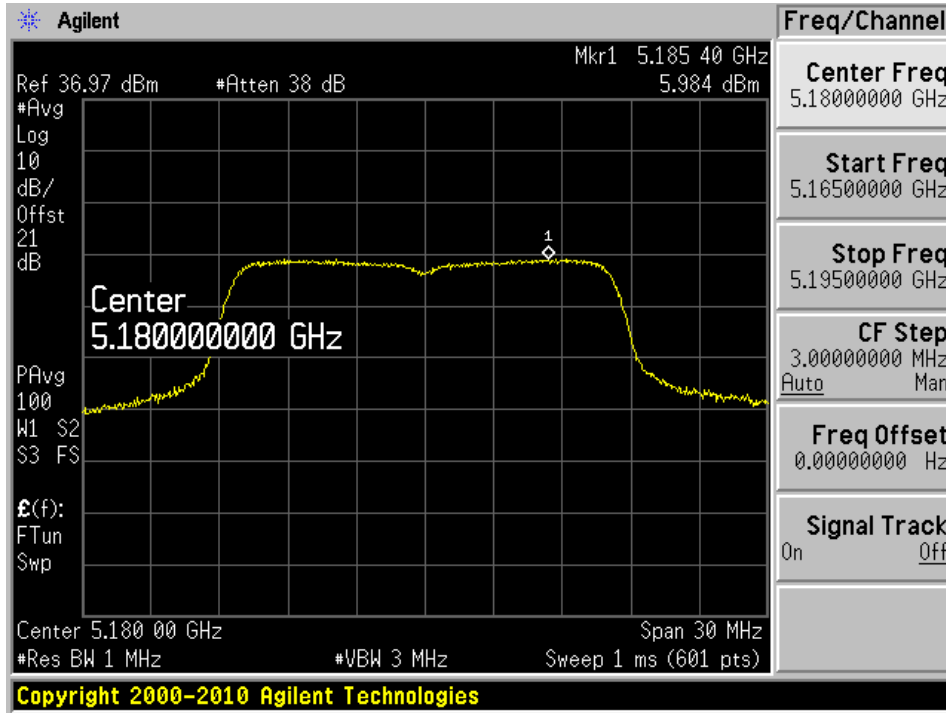

Mid Channel

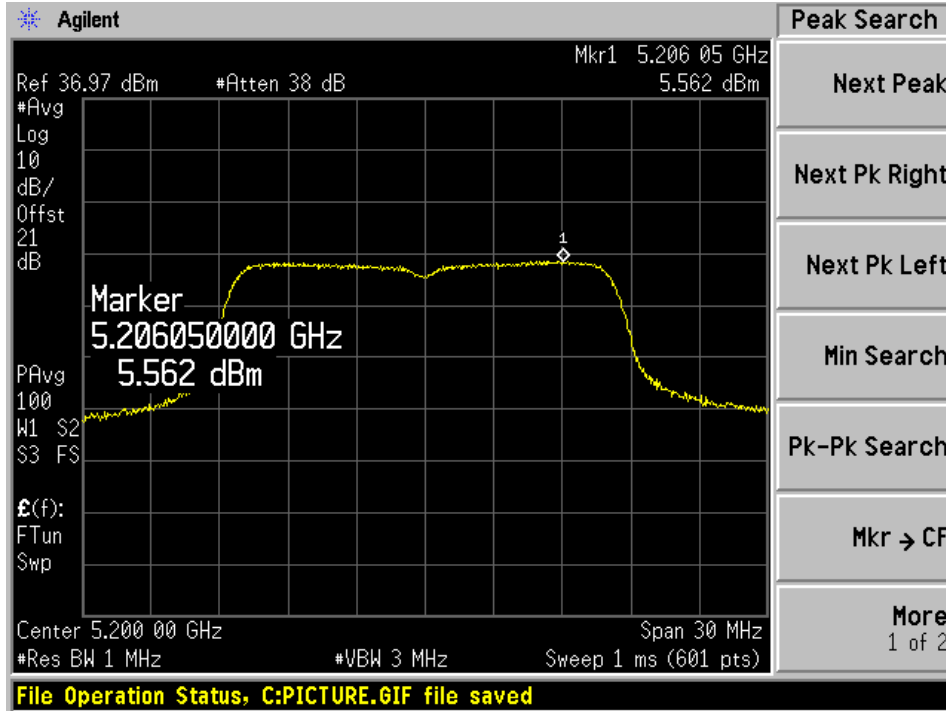


High Channel

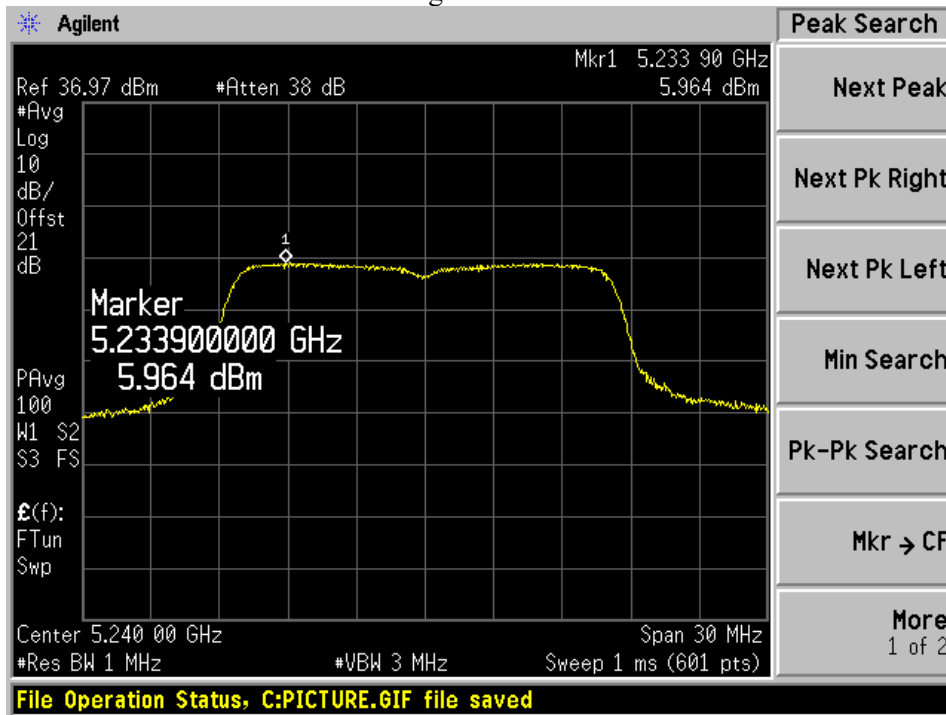


5150 - 5250 MHz 802.11n20


Low Channel

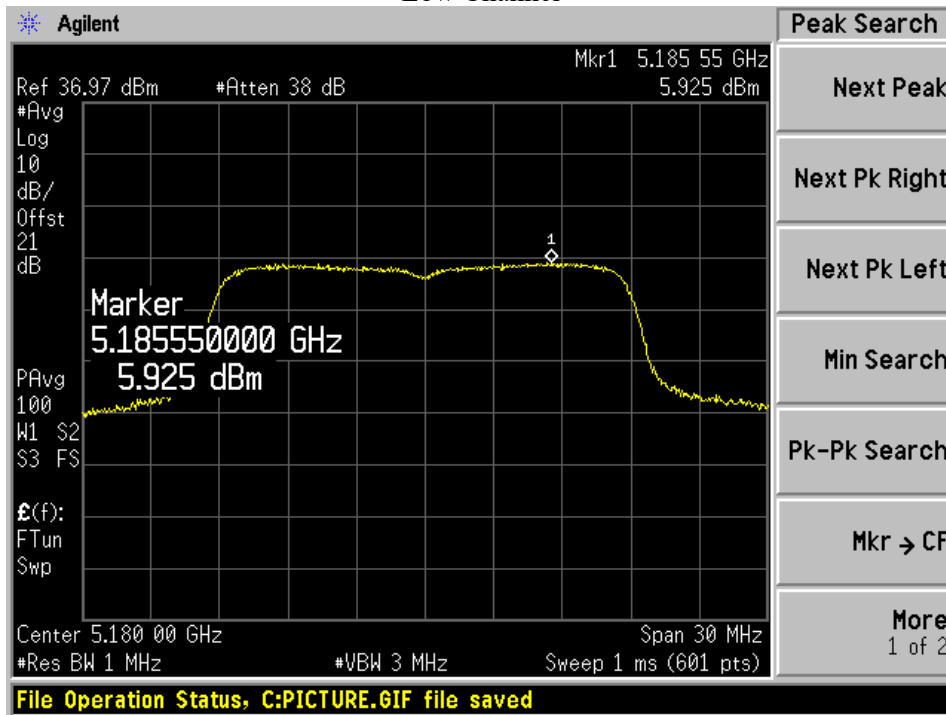

Mid Channel

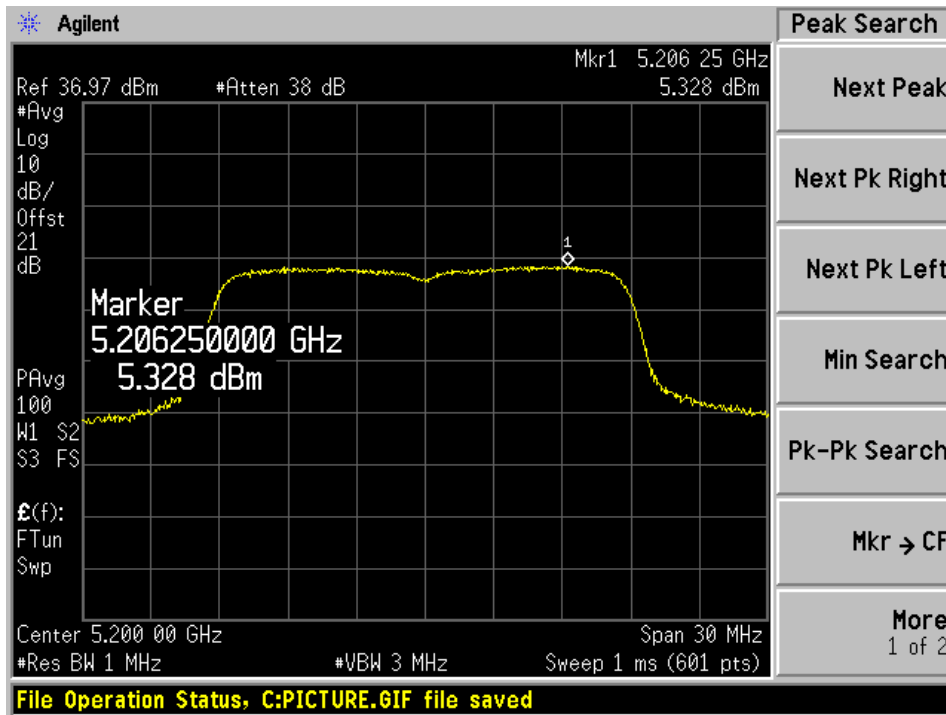


High Channel

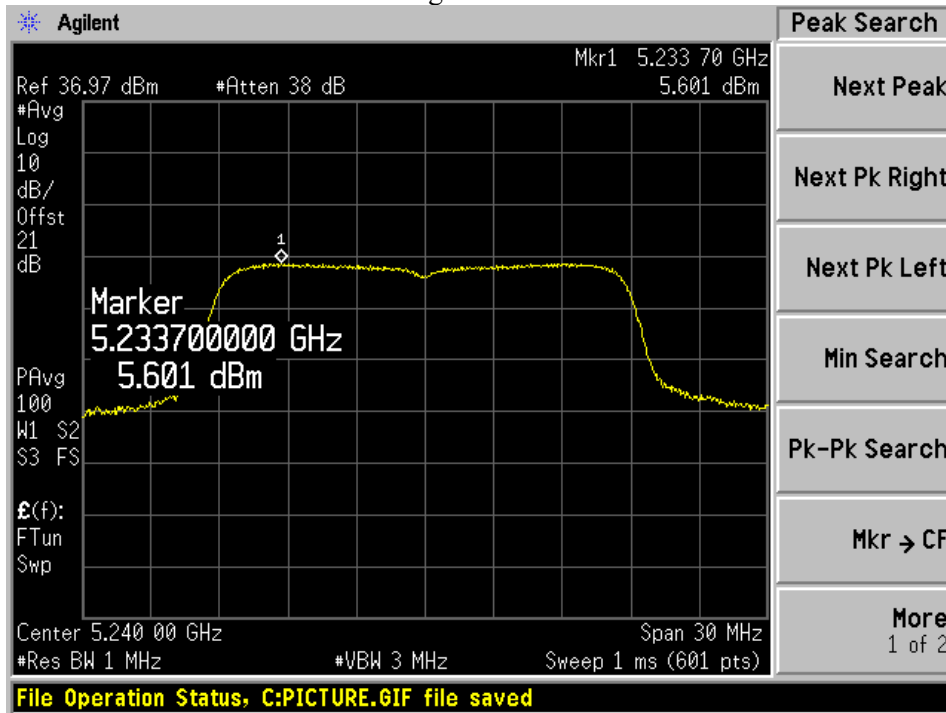


5150 - 5250 MHz 802.11n40

Low Channel

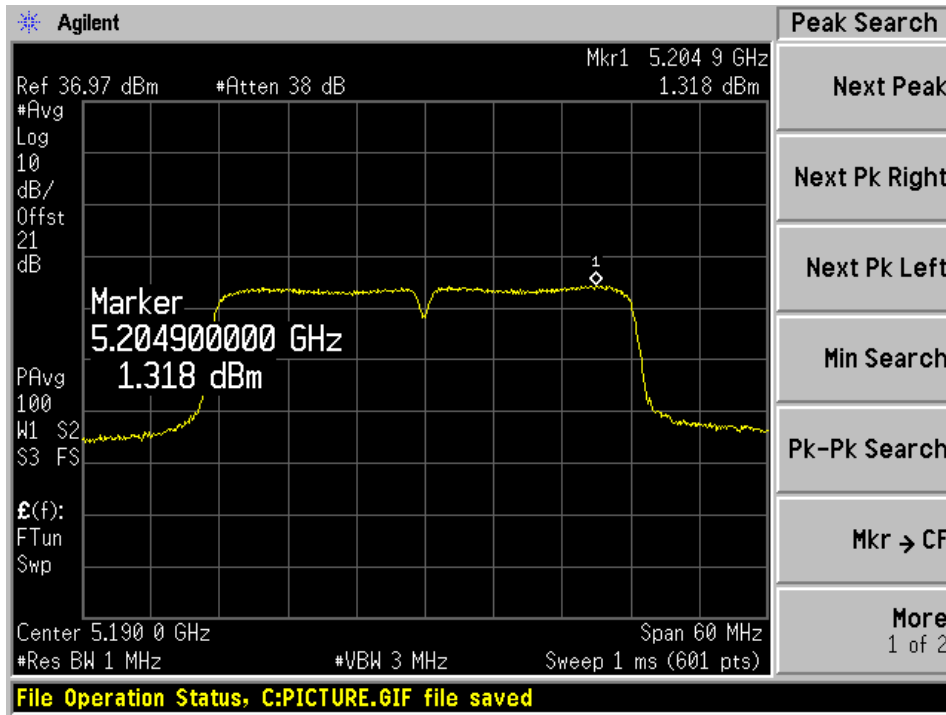


Mid Channel

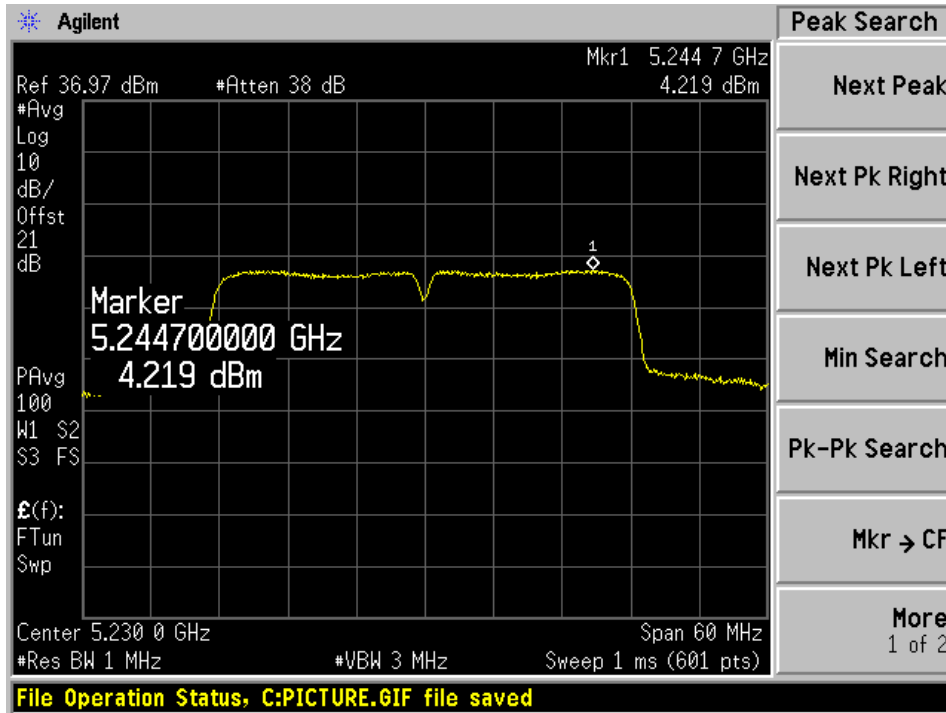


5150 - 5250 MHz 802.11ac80

Low Channel

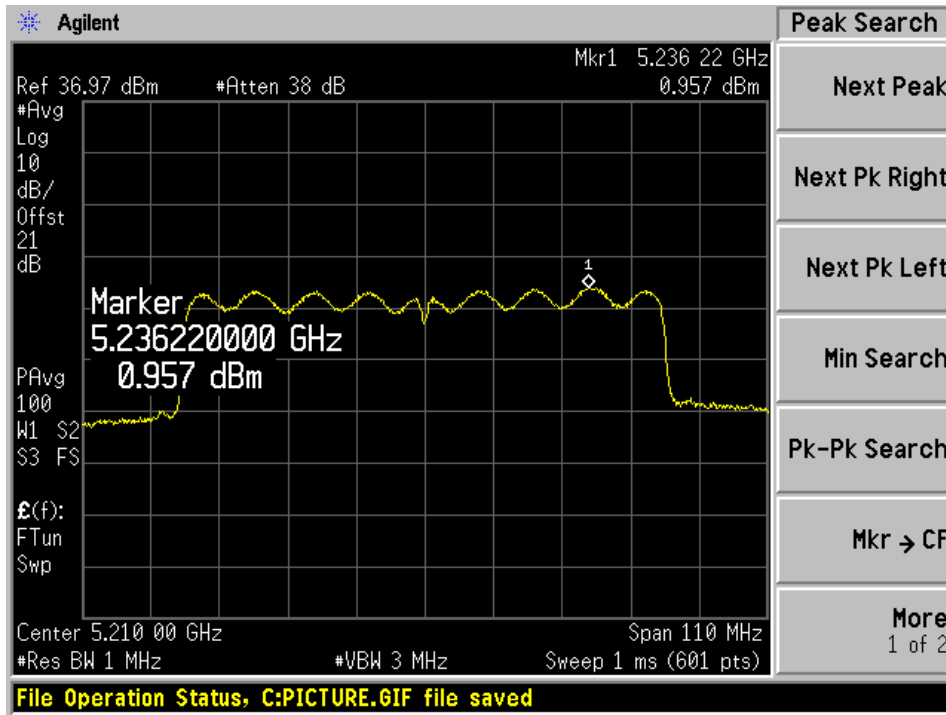


5250 - 5350 MHz 802.11a


Low Channel

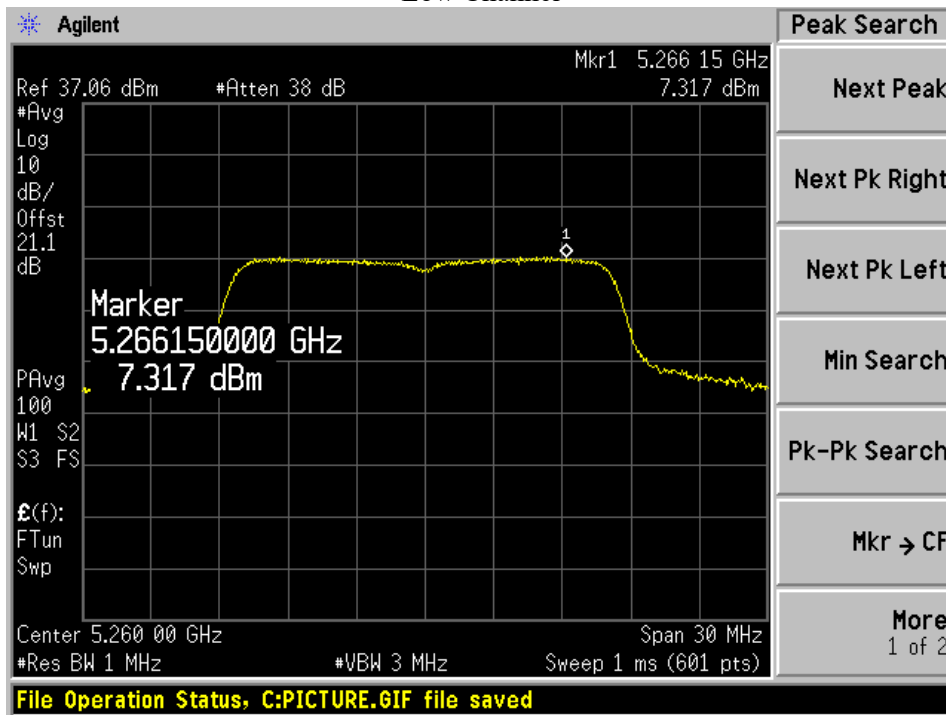

Mid Channel

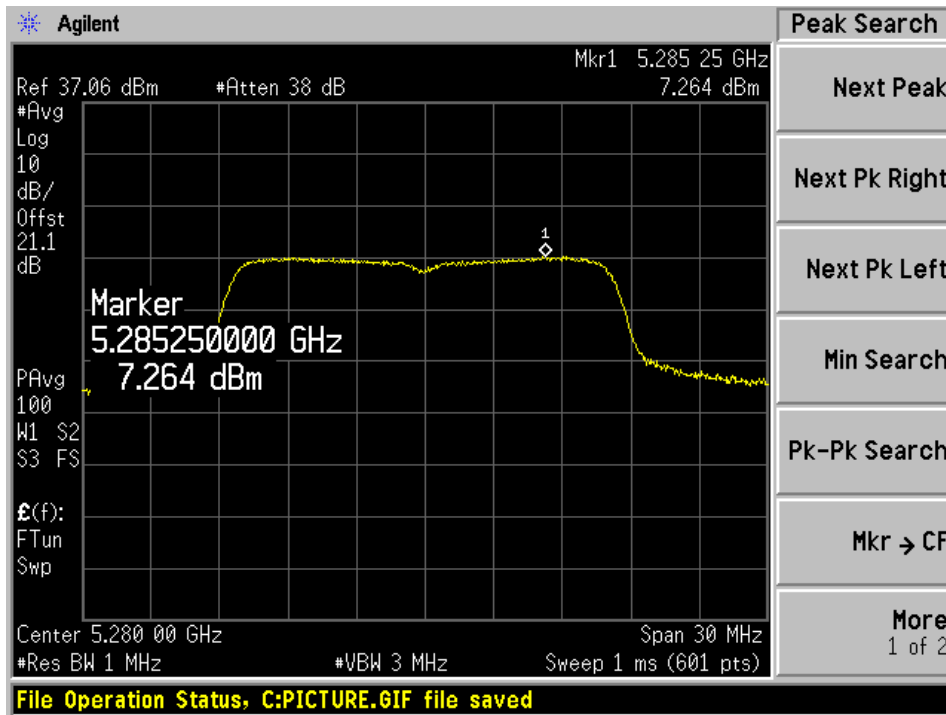


High Channel

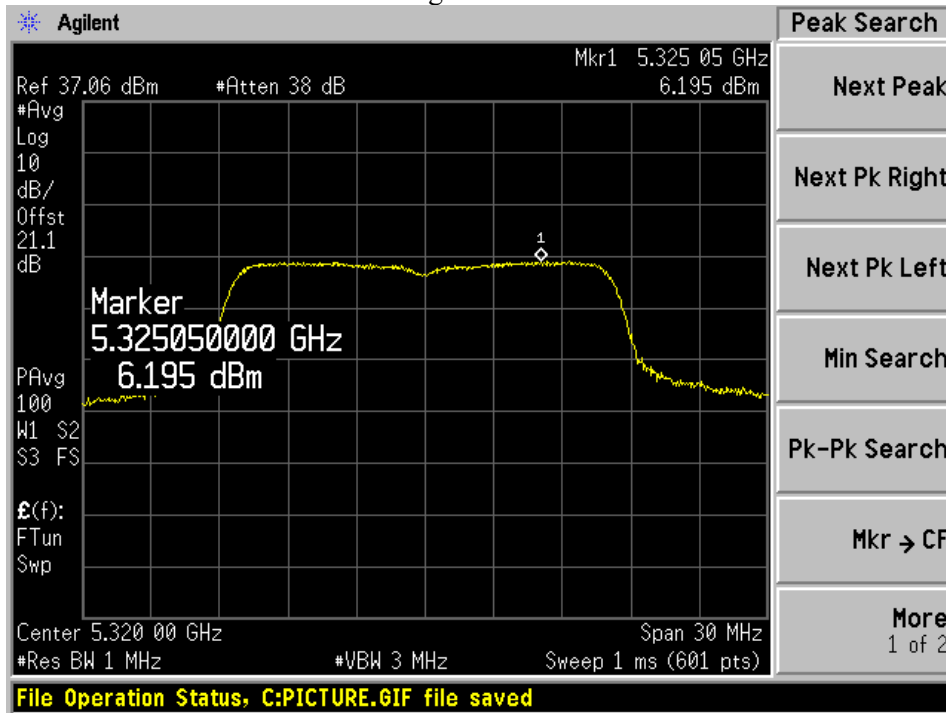


5250 - 5350 MHz 802.11n20


Low Channel

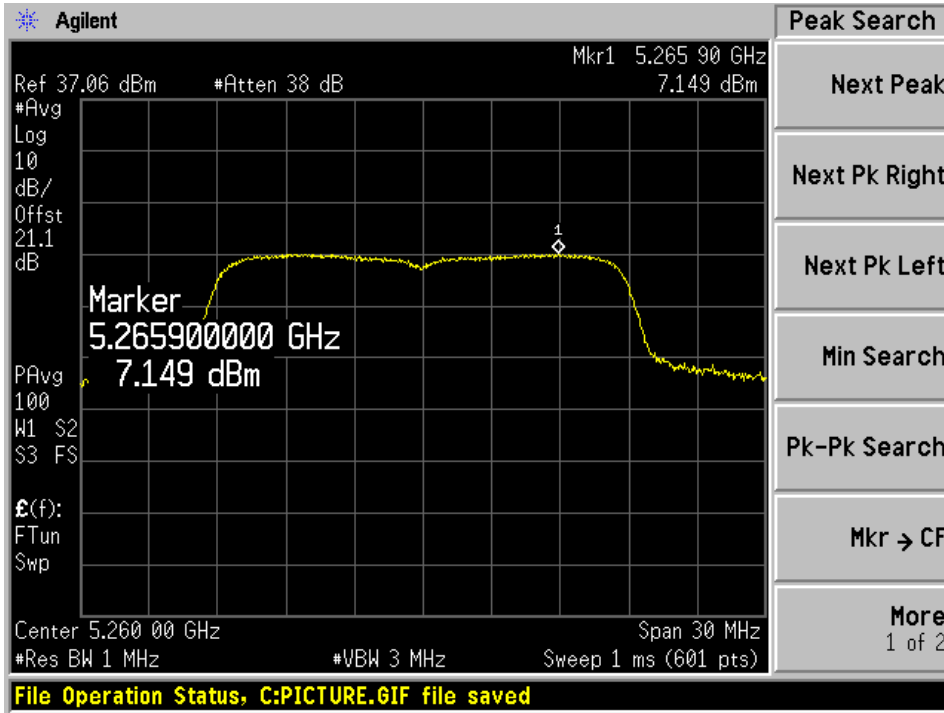

Mid Channel

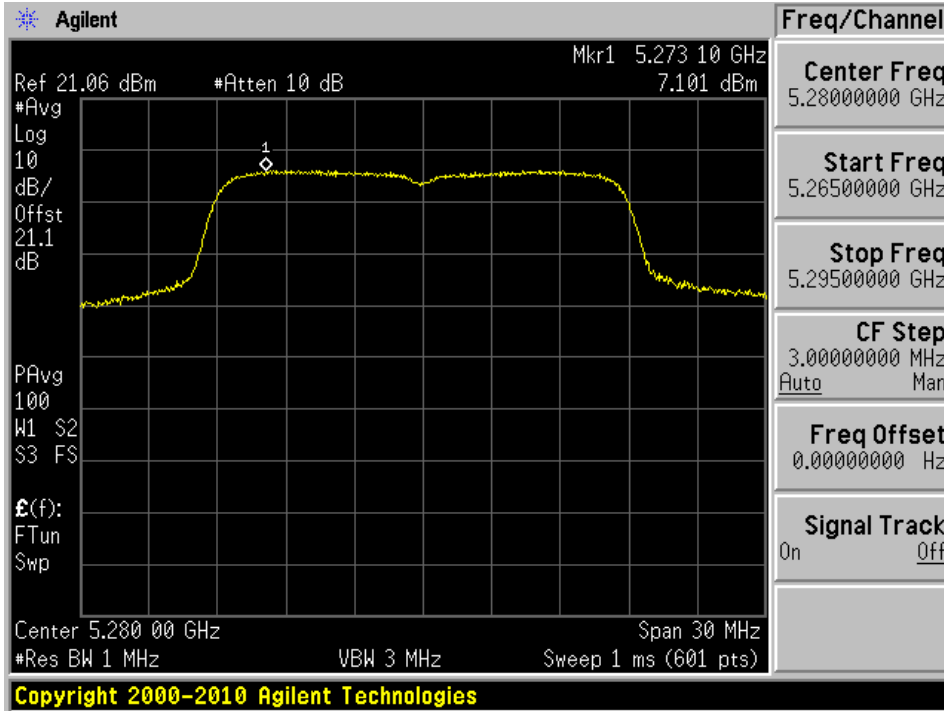


High Channel

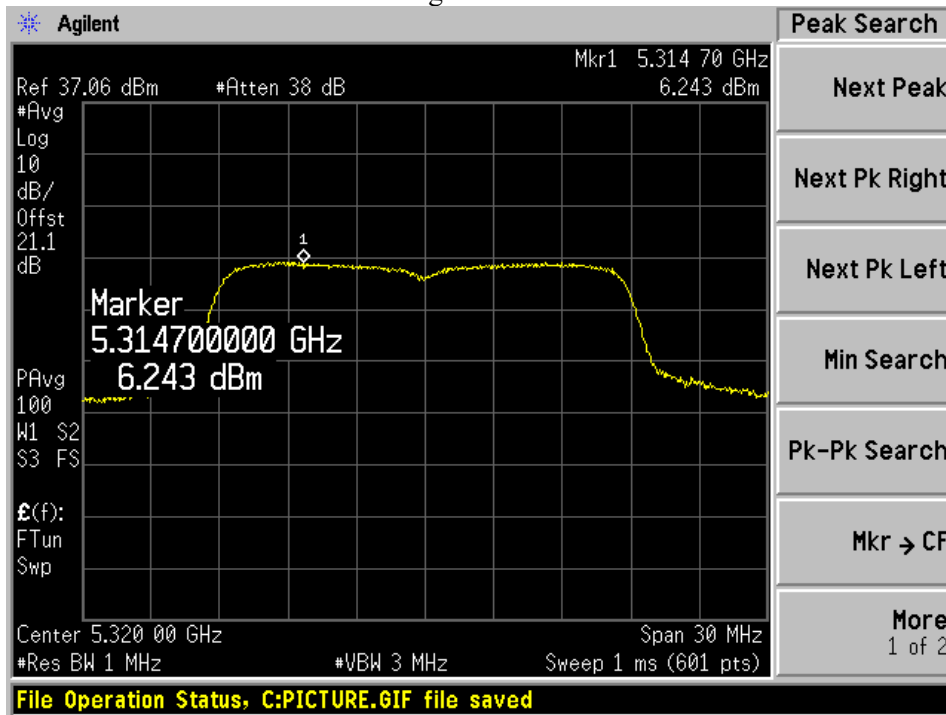


5250 - 5350 MHz 802.11n40

Low Channel

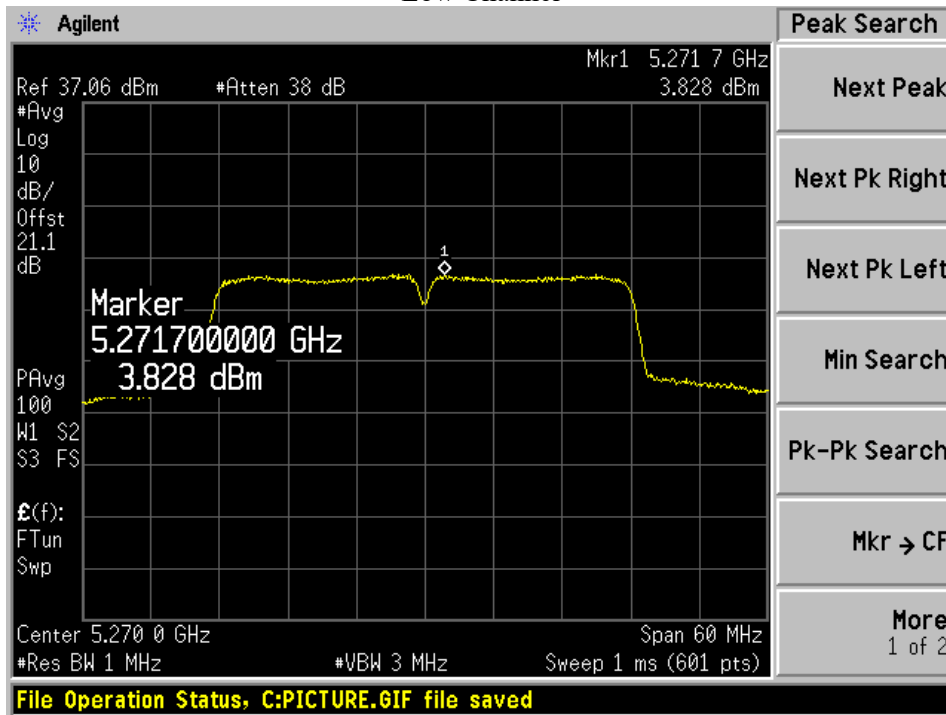


Mid Channel

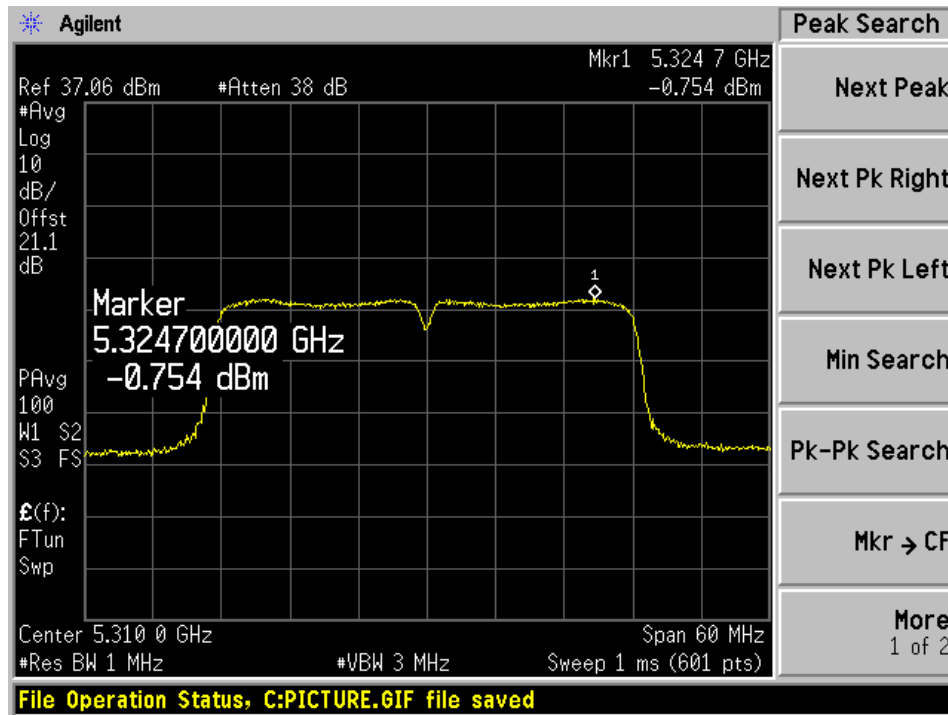


5250 - 5350 MHz 802.11ac80

Low Channel

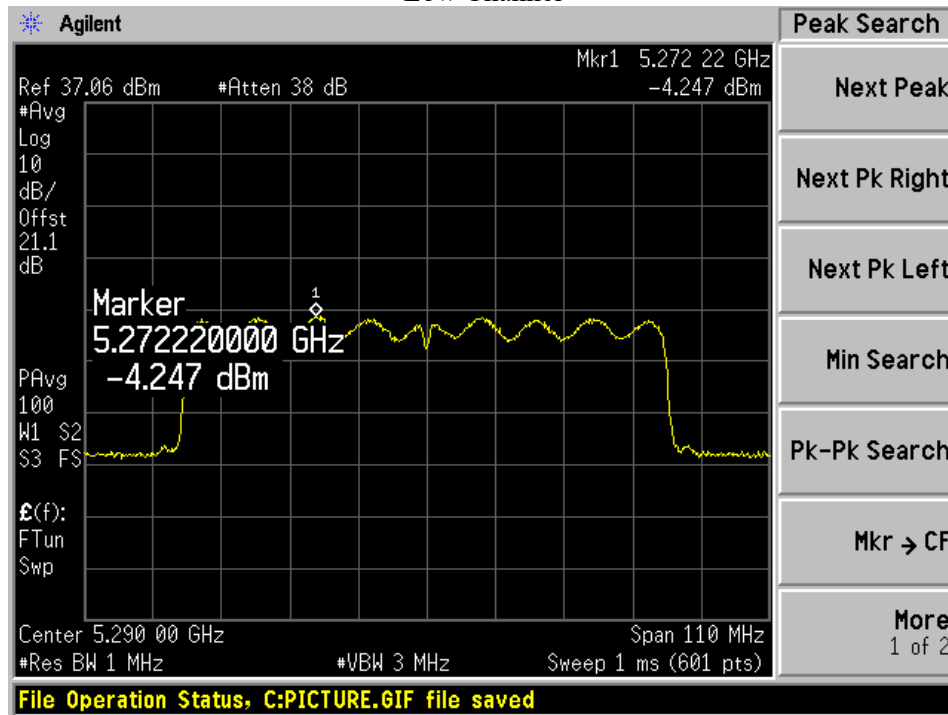


5470MHz - 5725 MHz 802.11a


Low Channel

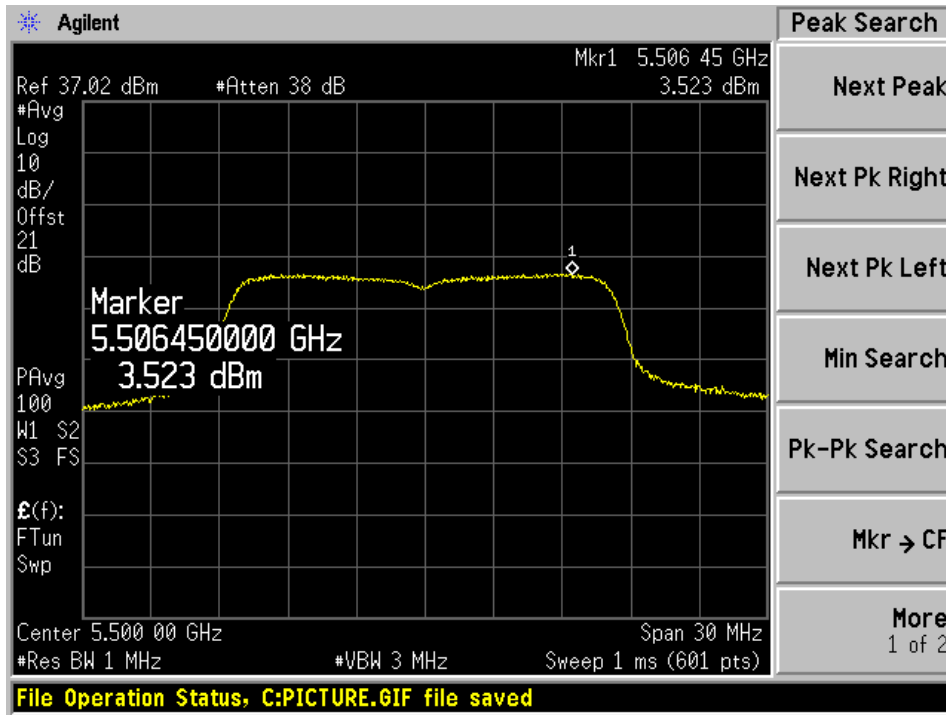

Mid Channel

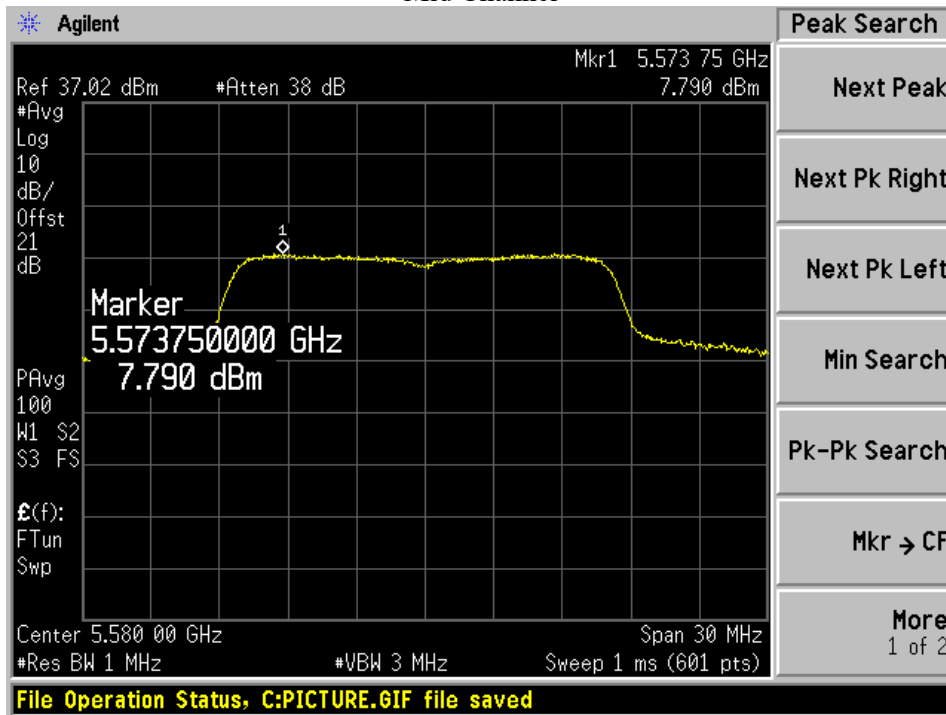


High Channel

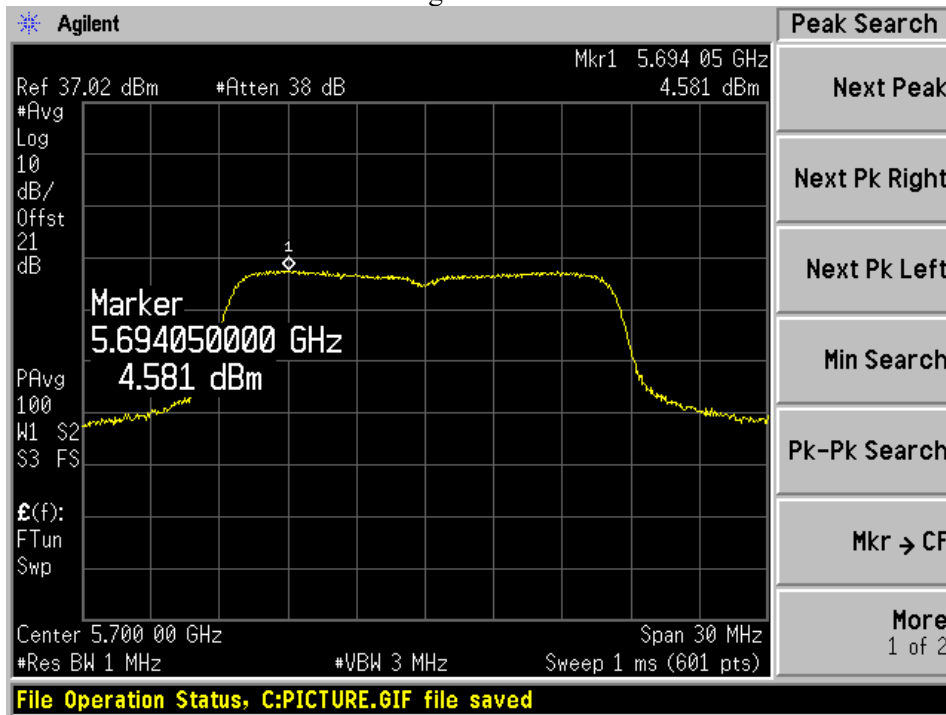


5470MHz - 5725 MHz 802.11n20


Low Channel

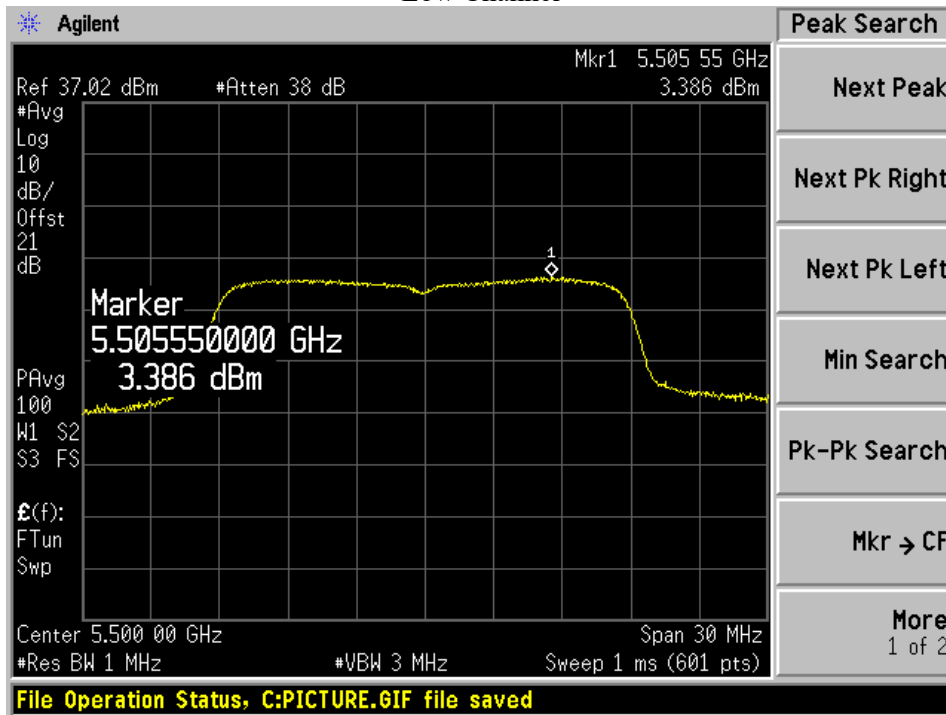

Mid Channel

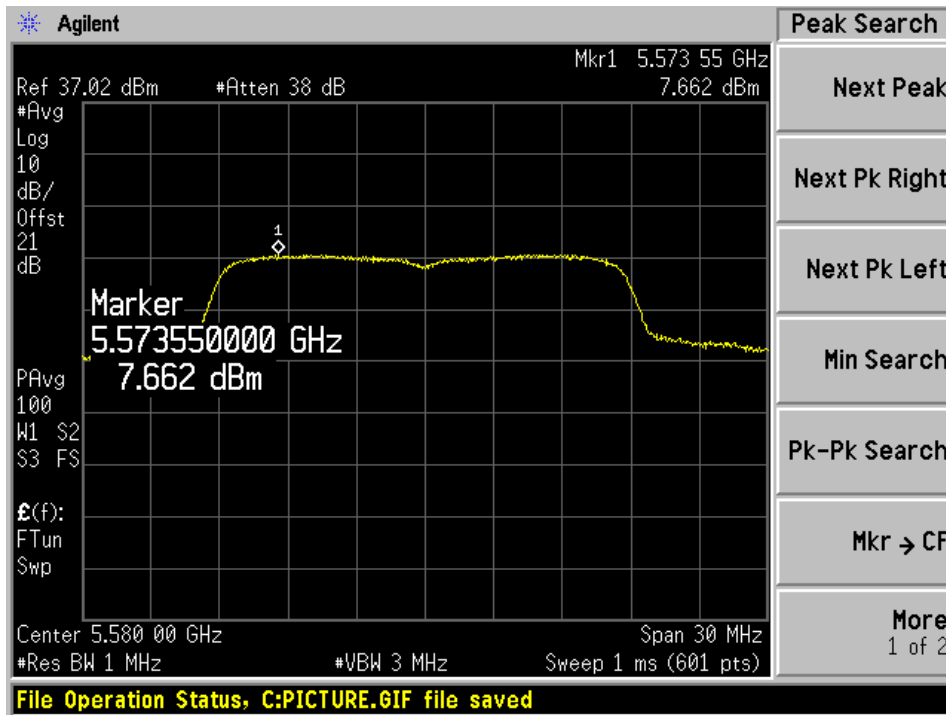


High Channel

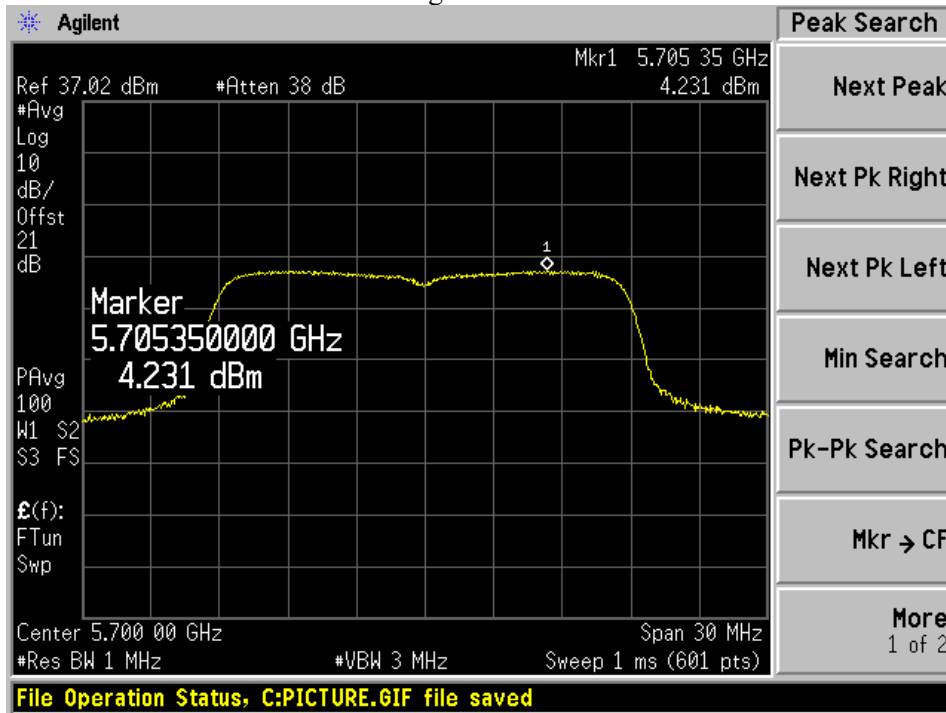


5470MHz - 5725 MHz 802.11n40


Low Channel

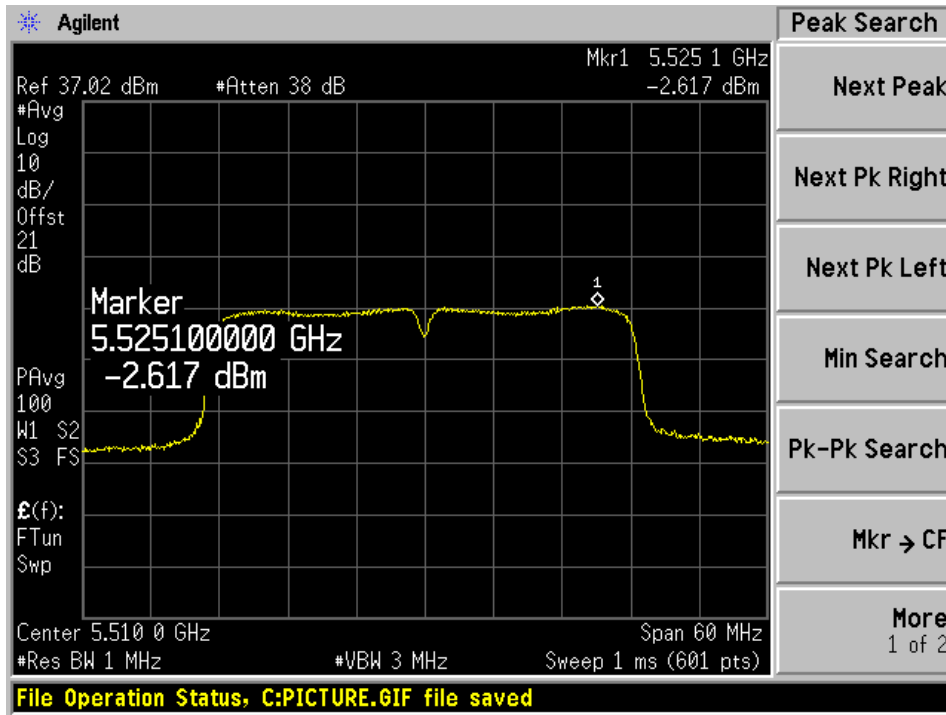

Mid Channel

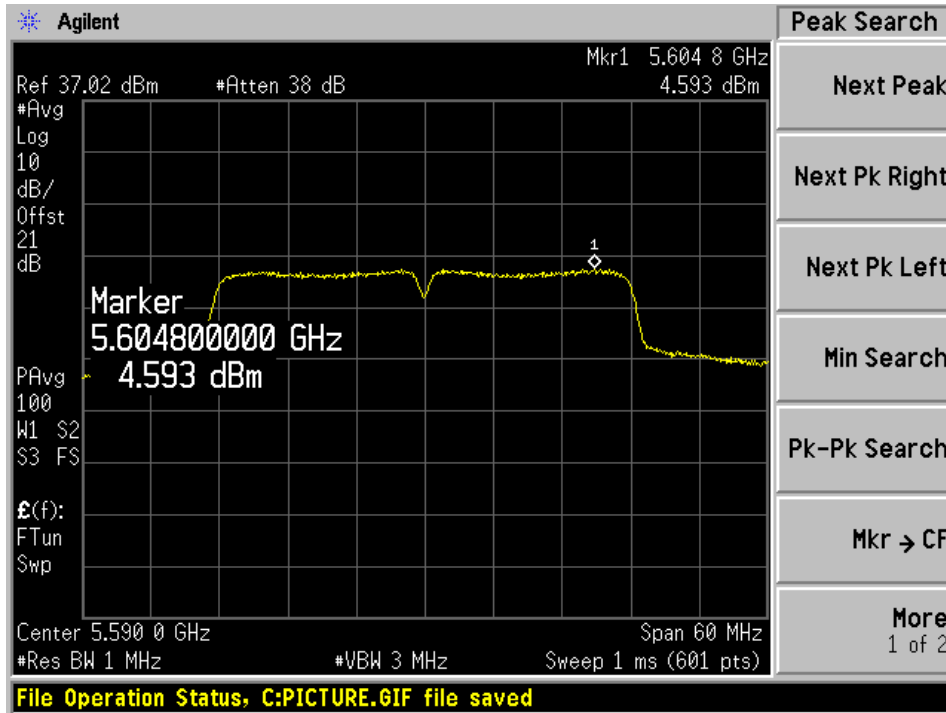


High Channel

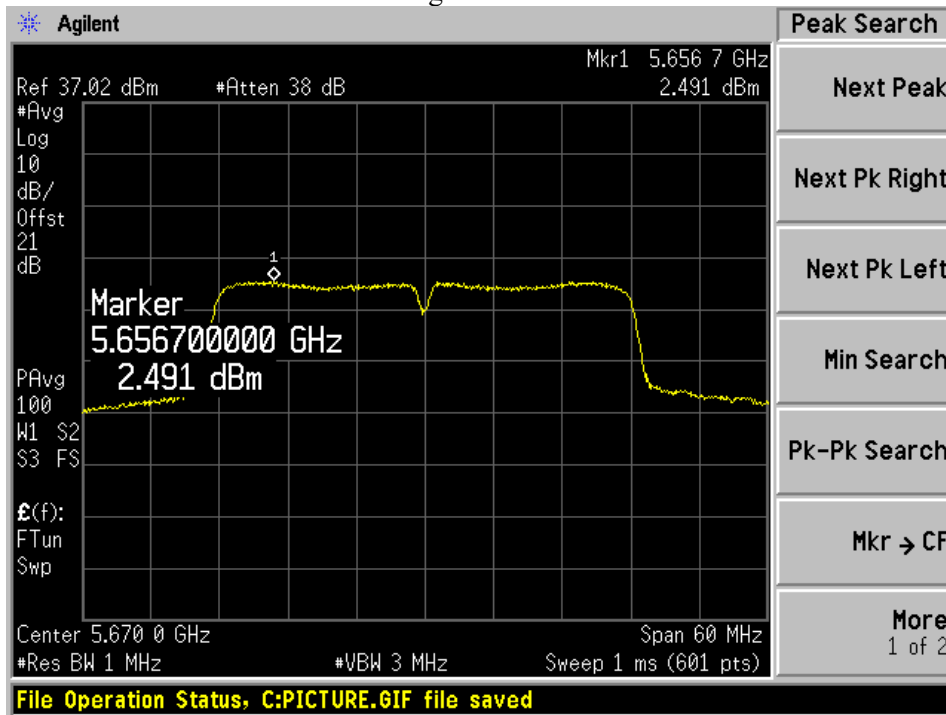


5470MHz - 5725 MHz 802.11ac80

Low Channel

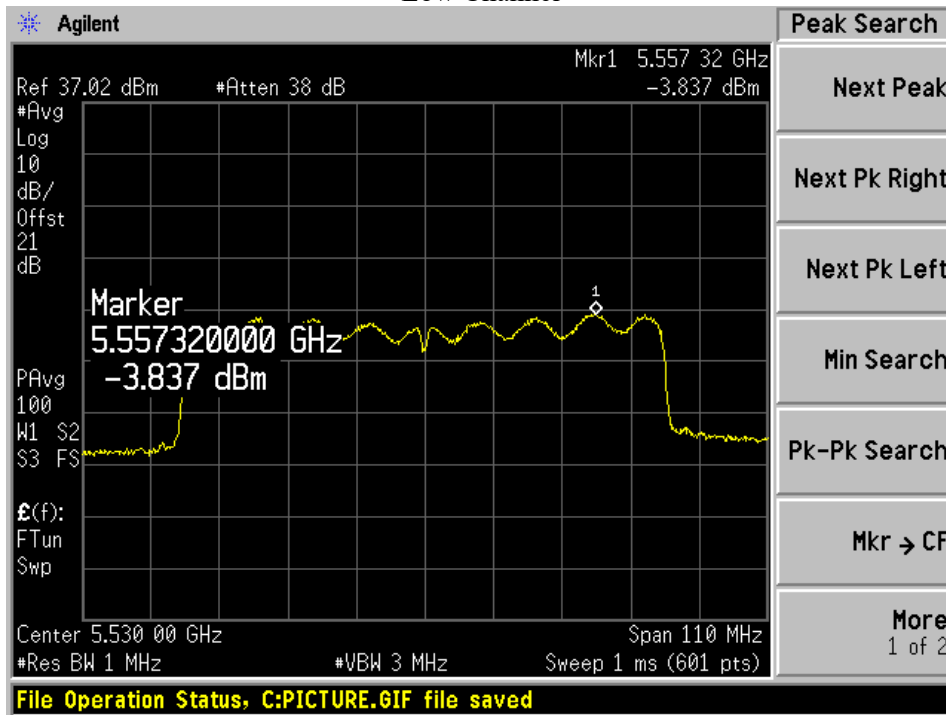


Mid Channel

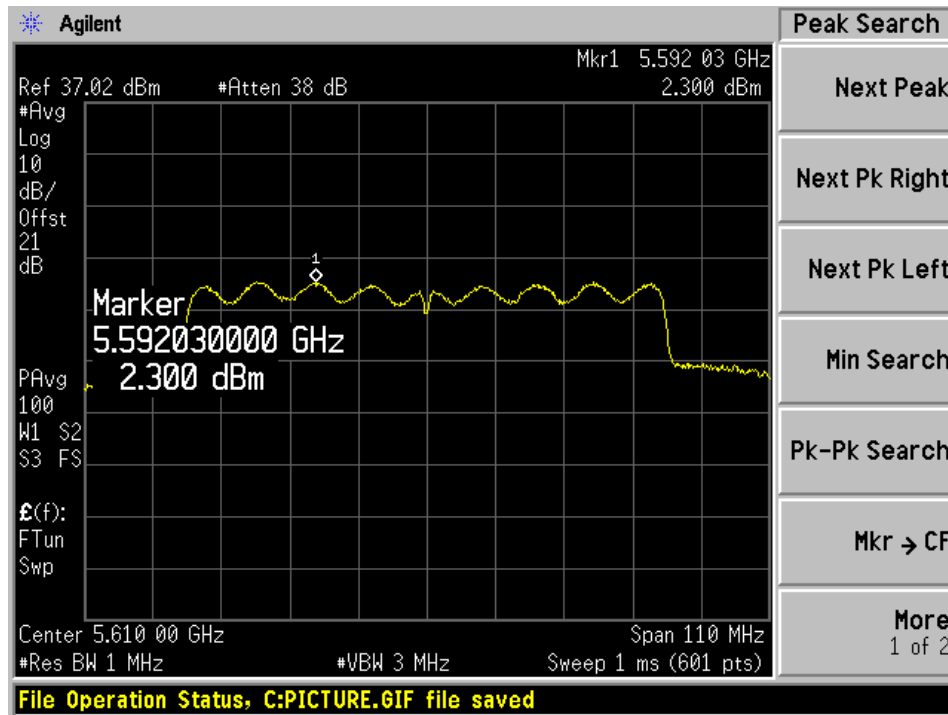


5725 - 5850 MHz 802.11a


Low Channel

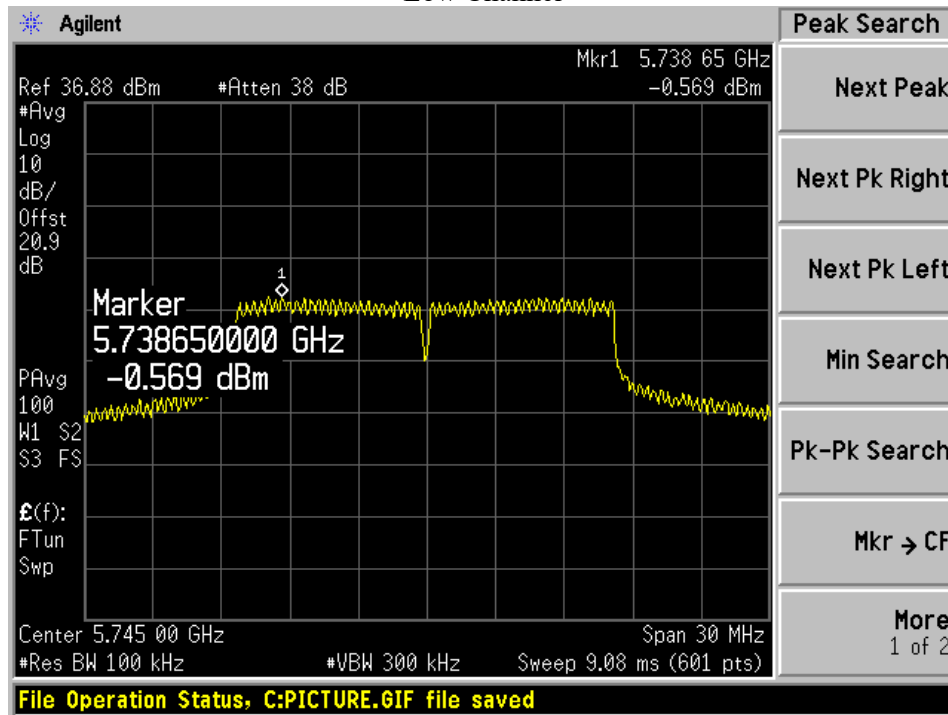

Mid Channel

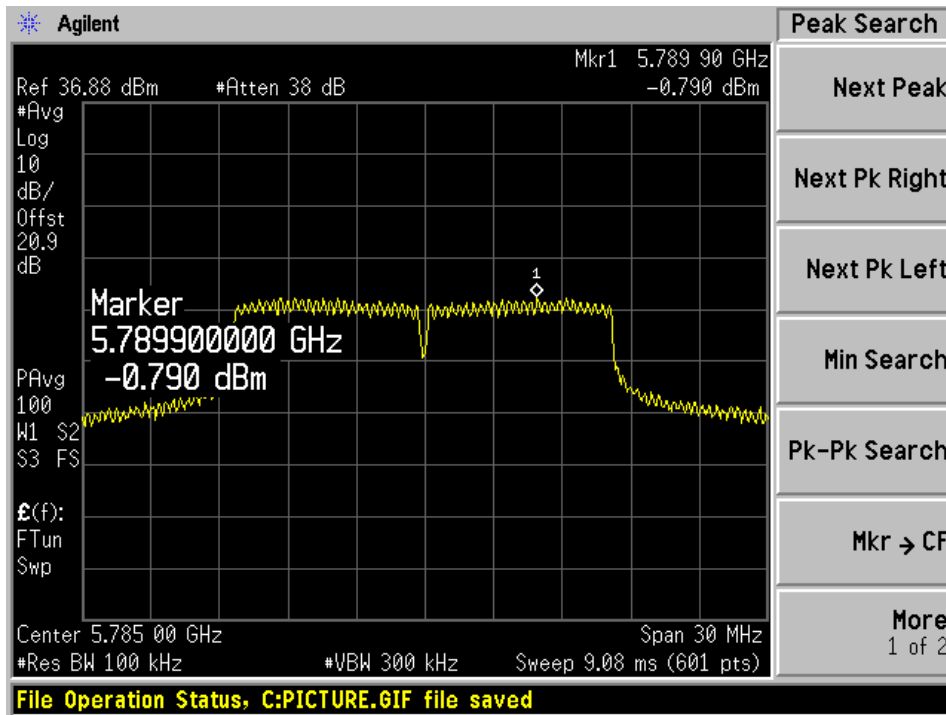


High Channel

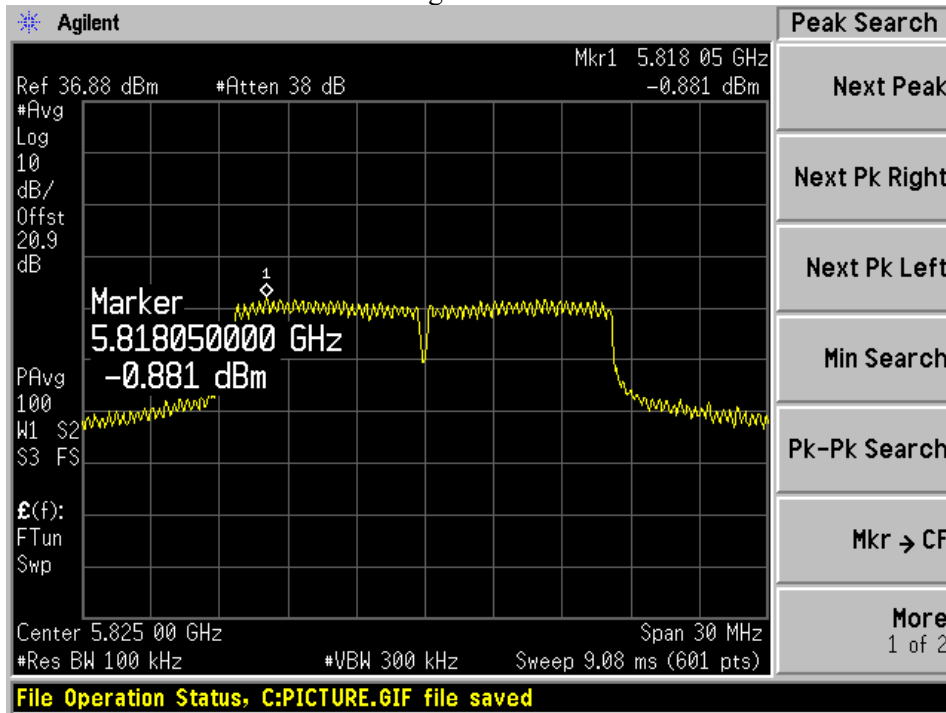


5725 - 5850 MHz 802.11n20


Low Channel

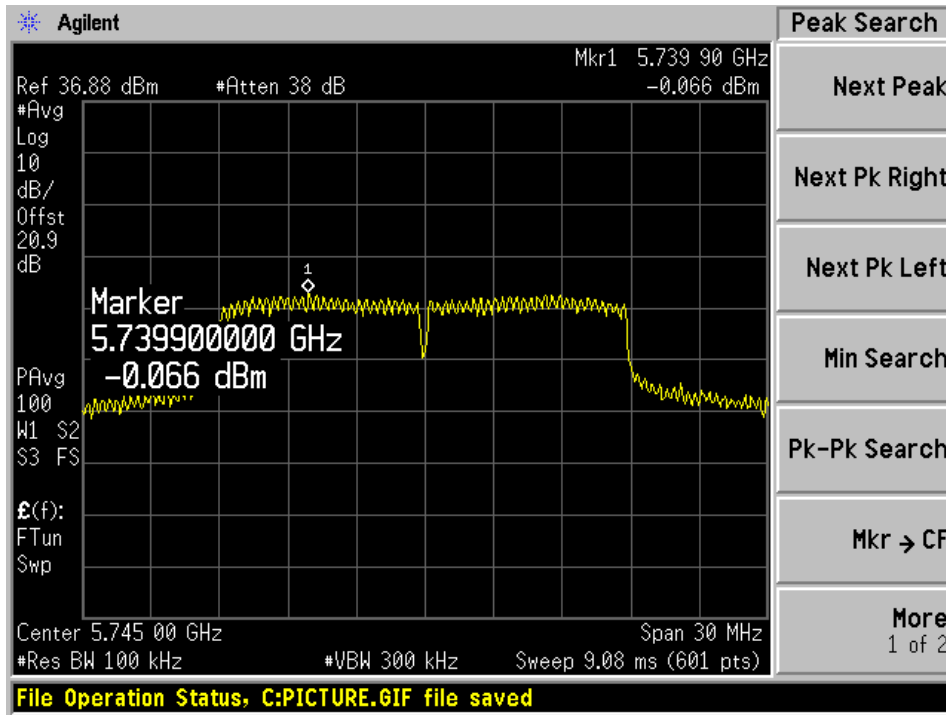

Mid Channel

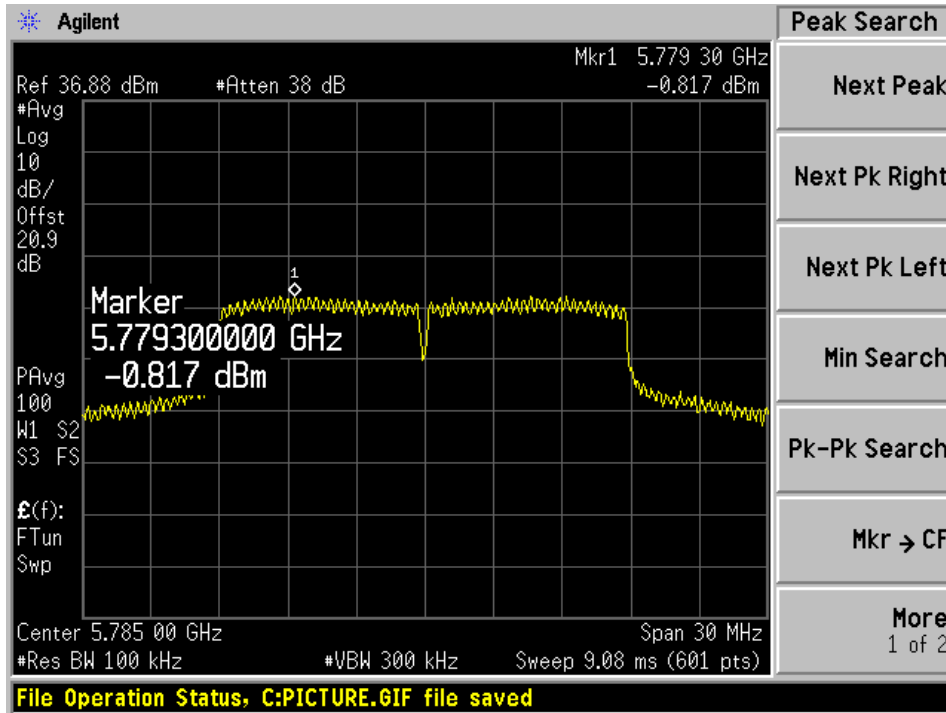


High Channel

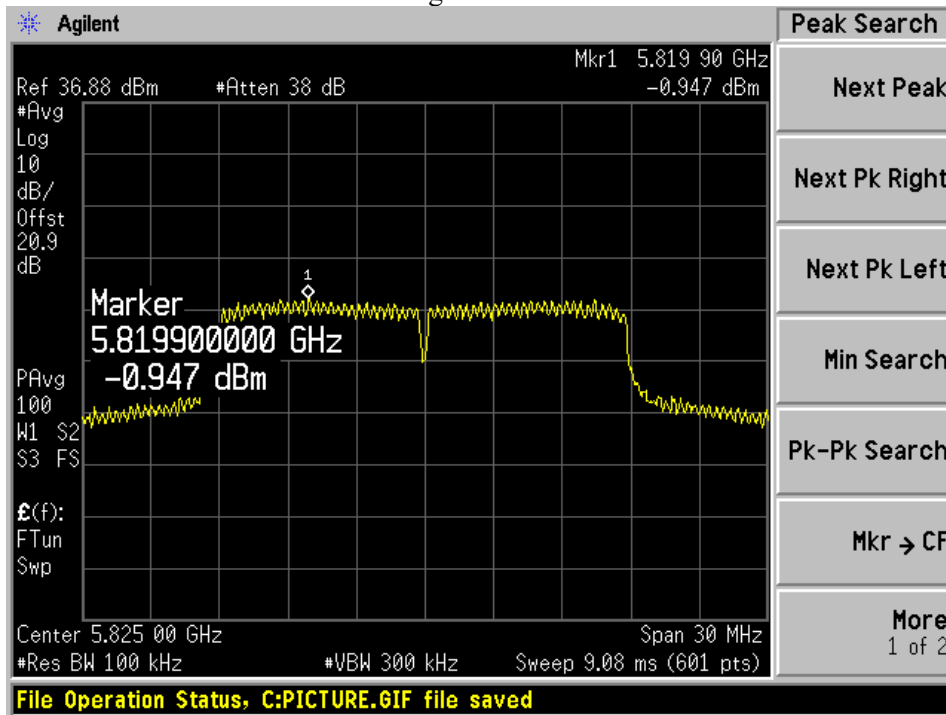


5725 - 5850 MHz 802.11n40

Low Channel

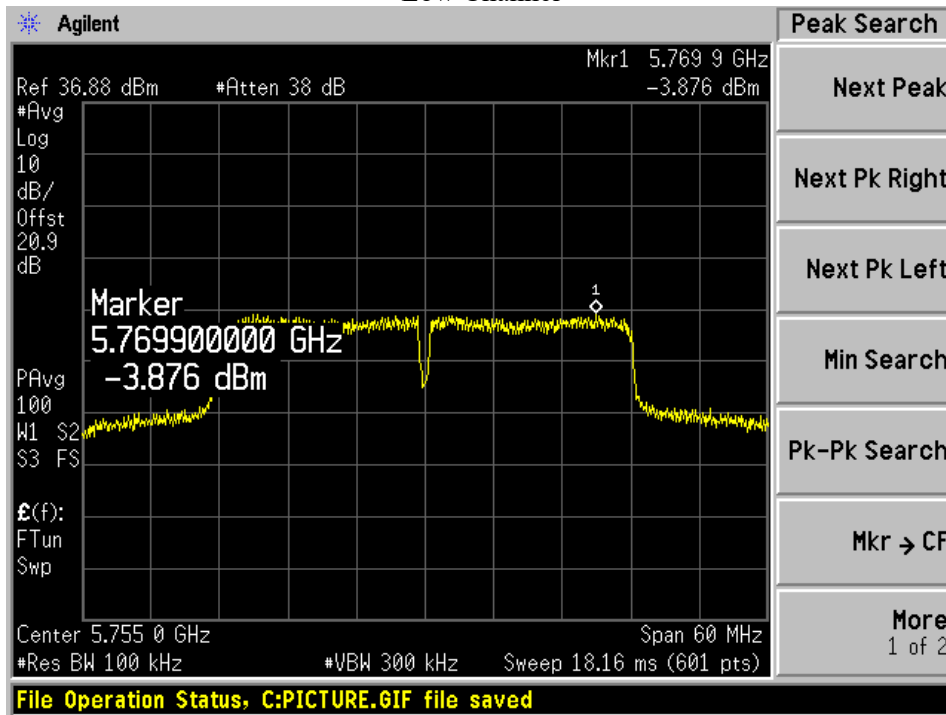


Mid Channel

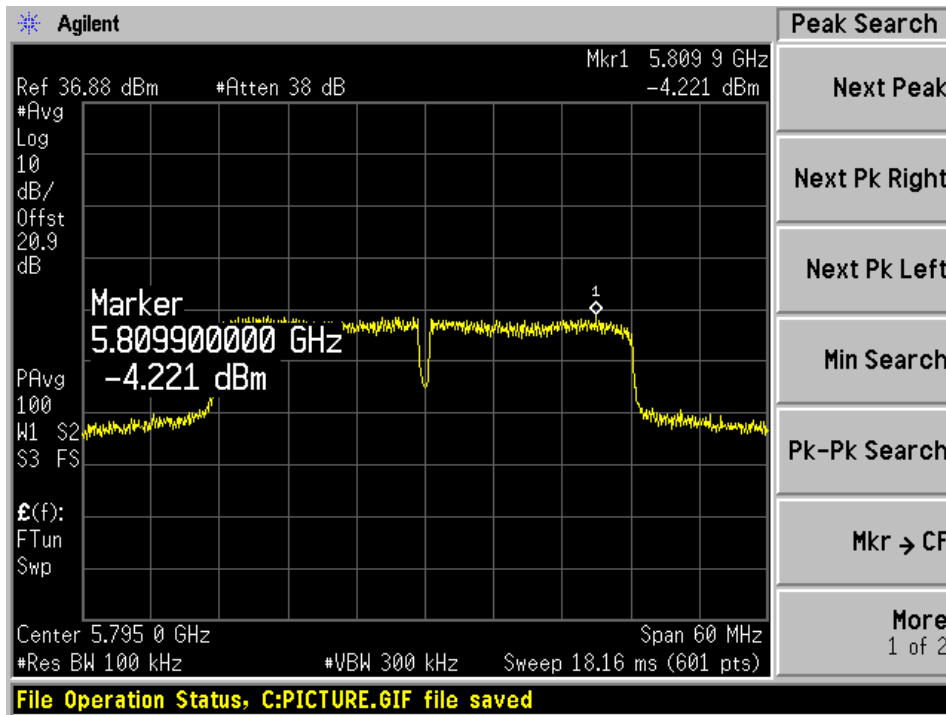

5725 - 5850 MHz 802.11ac80

Low Channel

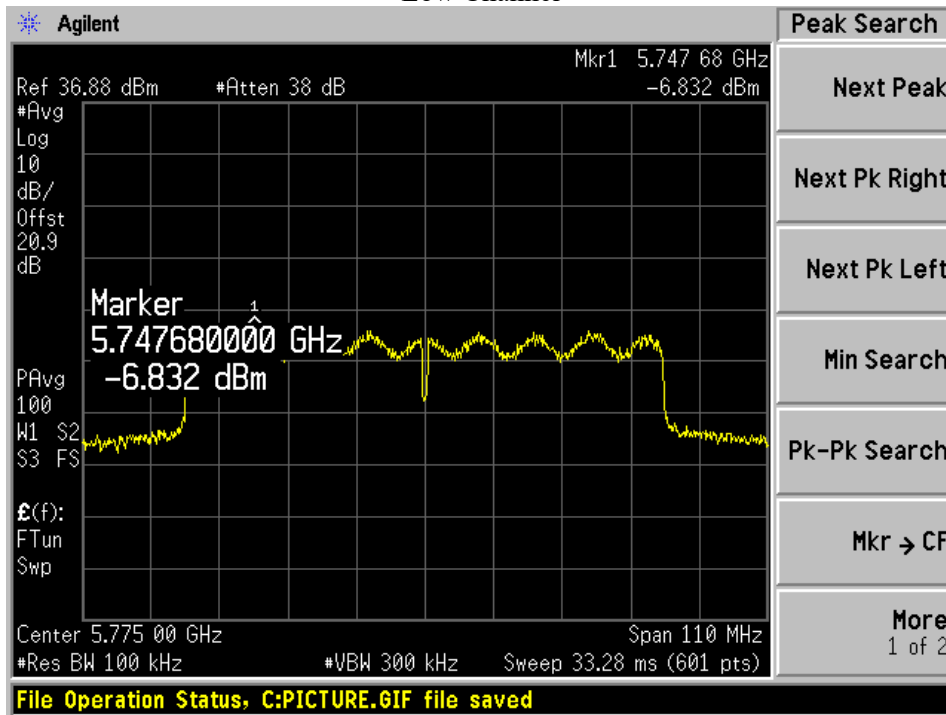

11 FCC §15.407(b) & ISEDC RSS-247 §6.2 - Out of Band Emissions

11.1 Applicable Standards

According to FCC §15.407(b):

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

The provisions of §15.205 apply to intentional radiators operating under this section.

According to ISEDC RSS-247 §6.2.1 for devices operating in the frequency band 5150-5250 MHz:

For transmitters operating in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. However, any unwanted emissions that fall into the band 5250-5350 MHz must be 26 dBc, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth, above 5.25 GHz. Otherwise, the transmission is considered as intentional and the devices shall implement dynamic frequency selection (DFS) and transmitter power control (TPC) as per the requirements for the band 5250-5350 MHz.

According to ISEDC RSS-247 §6.2.2 for devices operating in the frequency band 5250-5350 MHz:

For devices with both operating frequencies and channel bandwidths contained within the band 5250-5350 MHz, the device shall comply with the following:

1. All emissions outside the band 5250-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. if the equipment is intended for outdoor use; or
2. All emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. and any emissions within the band 5150-5250 MHz shall meet the power spectral density limits of Section 6.2.1. The device shall be labelled "for indoor use only."

For devices with operating frequencies in the band 5250-5350 MHz but having a channel bandwidth that overlaps the band 5150-5250 MHz, the devices' unwanted emission shall not exceed -27 dBm/MHz e.i.r.p. outside the band 5150-5350 MHz and its power shall comply with the spectral power density for operation within the band 5150-5250 MHz. The device shall be labelled "for indoor use only."

According to ISEDC RSS-247 §6.2.3 for devices operating in the frequency band 5470-5600 MHz and 5650-5725 MHz. Emissions outside the band 5470-5725 MHz shall not exceed -27 dBm/MHz e.i.r.p.

According to ISEDC RSS-247 §6.2.4 for devices operating in the frequency band 5725-5850 MHz:

For the band 5725-5850 MHz, emissions at frequencies from the band edges to 10 MHz above or below the band edges shall not exceed -17 dBm/MHz e.i.r.p.

For emissions at frequencies more than 10 MHz above or below the band edges, the emissions power shall not exceed -27 dBm/MHz.

11.2 Measurement Procedure

Add a correction factor (antenna gain+ Attenuator loss+cable loss) to the offset of the spectrum analyzer.

Unwanted Emission Measurement:


Maximum emission levels are measured by setting the analyzer as follows:

- i. RBW = 1 MHz
- ii. VBW \geq 3 MHz
- iii. Detector = Peak
- iv. Sweep time = auto
- v. Trace mode = max hold

Integration Method:

1. For peak emissions measurements, follow the procedures described in section H)5), “Procedures for Peak Unwanted Emissions Measurements above 1000 MHz”, except for the following changes:
 - Set RBW = 100 kHz
 - Set VBW = 3RBW
 - Perform a band-power integration across the 1 MHz bandwidth in which the band-edge emission level is to be measured. CAUTION: You must ensure that the spectrum analyzer or EMI receiver is set for peak-detection and max-hold for this measurement.
2. For average emissions measurements, follow the procedures described in section H)6), “Procedures for Average Unwanted Emissions Measurements above 1000 MHz”, except for the following changes:
 - Set RBW = 100 kHz
 - Set VBW = 3RBW
 - Perform a band-power integration across the 1 MHz bandwidth in which the band-edge emission level is to be measured.

11.3 Test Setup Block Diagram

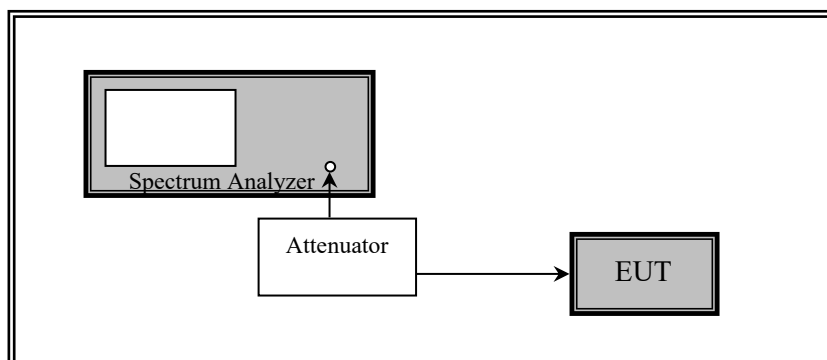

11.4 Test Equipment List and Details

BACL No.	Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
287	Agilent	Spectrum Analyzer	E4446A	US4430038 6	2022-05-05	1 year
-	-	RF cable	-	-	Each time ¹	N/A
-	-	10 dB attenuator			Each time ¹	N/A
-	-	20 dB attenuator			Each time ¹	N/A

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 "A2LA Policy on Metrological Traceability".

11.5 Test Environmental Conditions

Temperature:	22-24° C
Relative Humidity:	40-41 %
ATM Pressure:	103.1-104.1 kPa

Testing was performed by Christian Schwartz from 2022-07-08 to 2022-07-28 at the RF site.

11.6 Test Results


Please refer to the following plots

ISED Emission falling into 5250 – 5350 MHz


Channel	Frequency (MHz)	Channel Power (dBm)	Unwanted Emission Power (dBm)	Delta (dB)	Limit (dB)
802.11a					
48	5240	16.89	-12.97	29.86	>26
802.11ac/n20					
48	5240	16.87	-13.44	30.31	>26
802.11ac/n40					
46	5230	16.83	-10.80	27.63	>26
802.11ac80					
42	5210	15.54	-11.47	27.01	>26

Note: please refer to section 9.6 for the output power result.


A mode, 5240MHz, Unwanted Emission Power

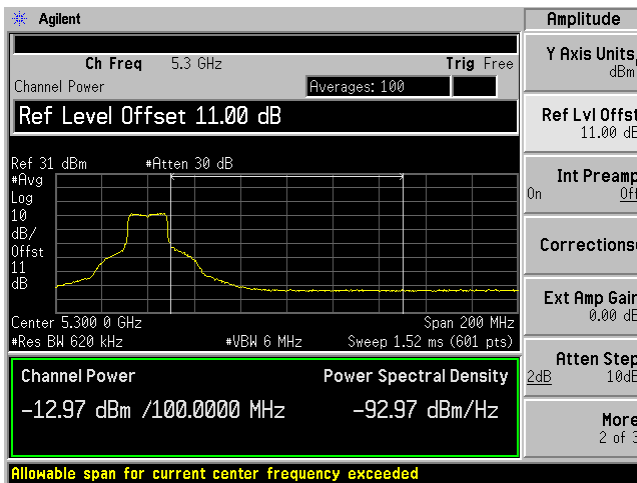


AC/N20 mode, 5240MHz, Unwanted Emission Power

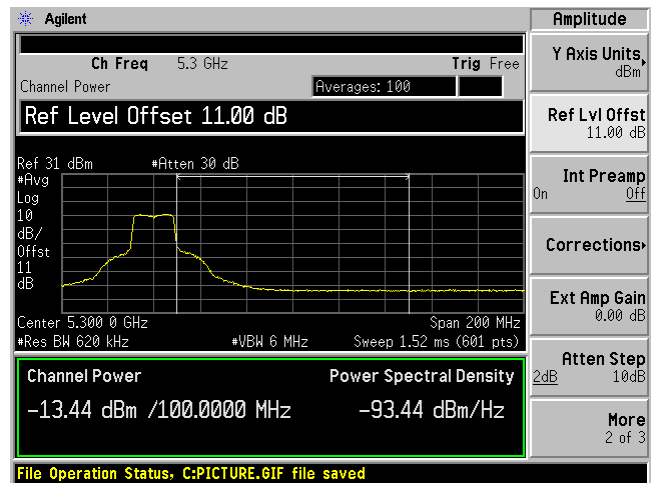

AC/N40 mode, 5230MHz, Unwanted Emission Power

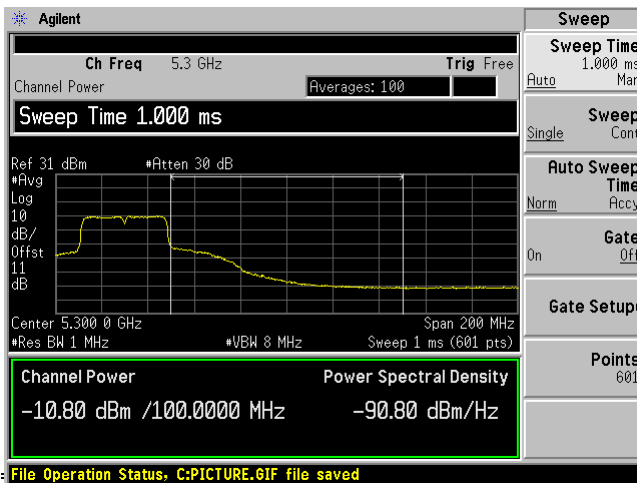

AC80 mode, 5210MHz, Unwanted Emission Power

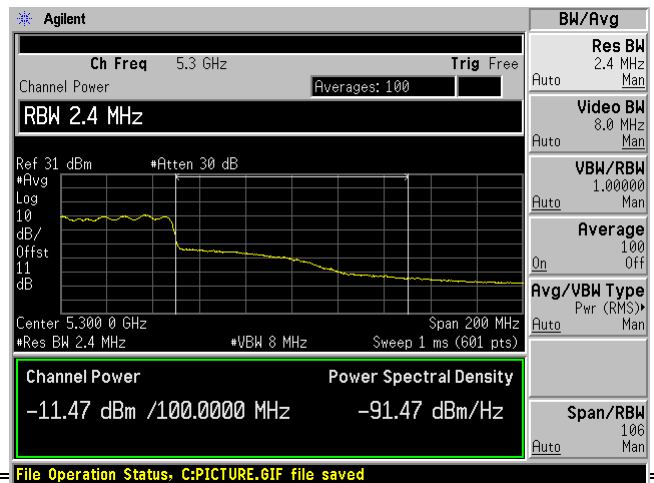


Spurious Emissions:


5150 - 5250 MHz 802.11a

Low Channel

30MHz – 6GHz

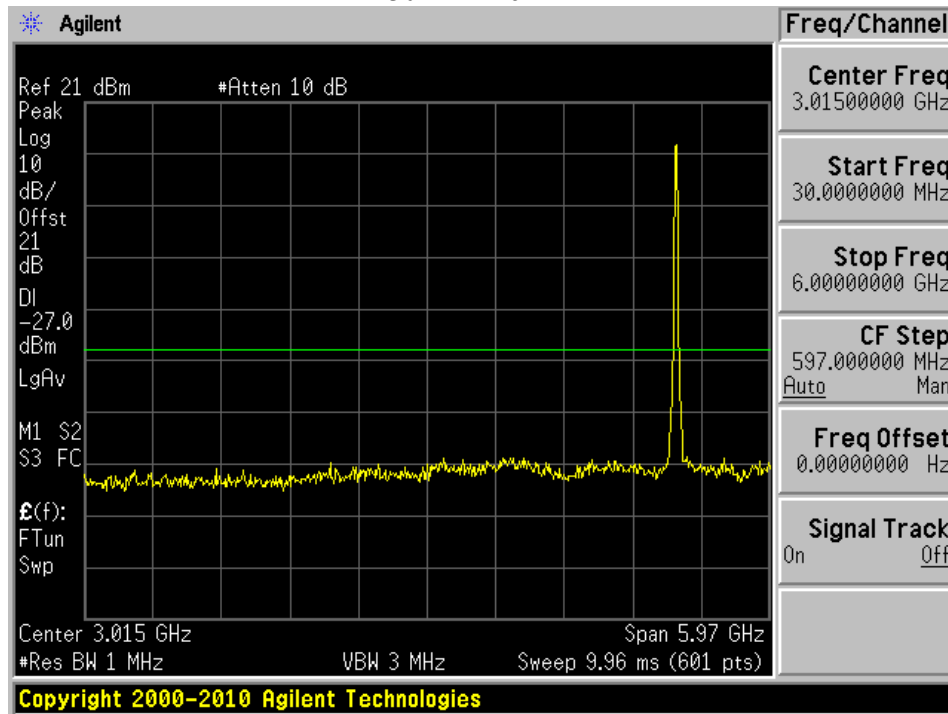


6GHz – 40GHz

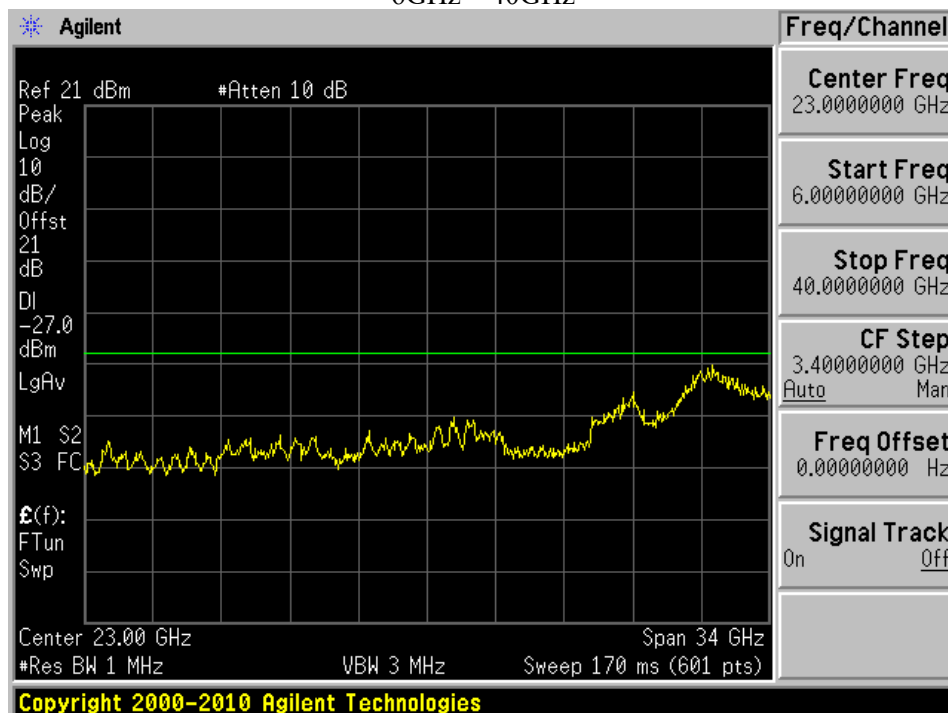


Mid Channel

30MHz – 6GHz

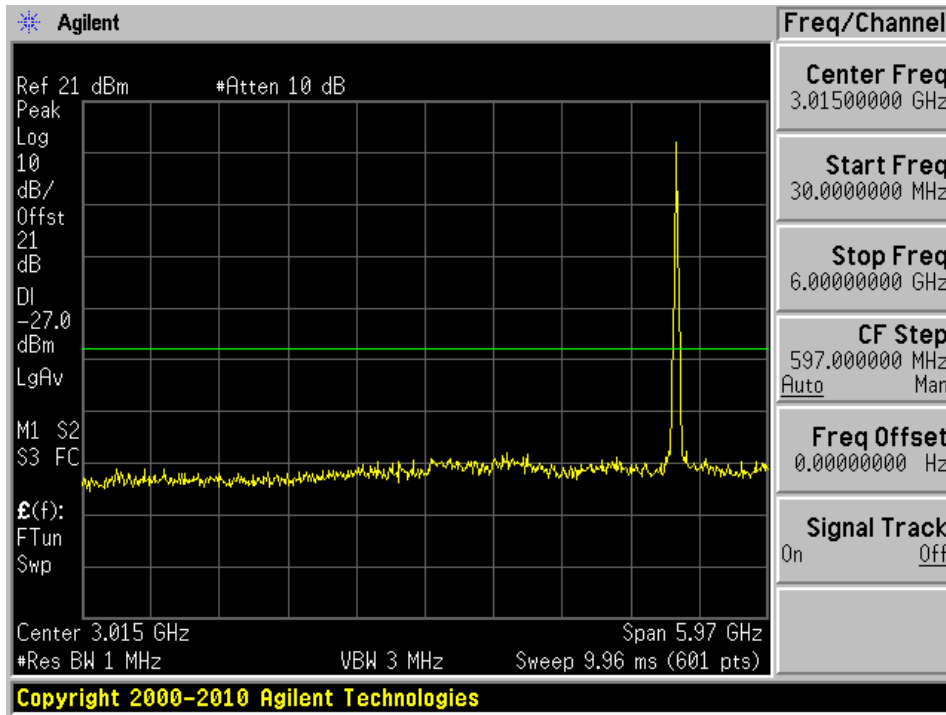


Mid Channel

6GHz – 40GHz

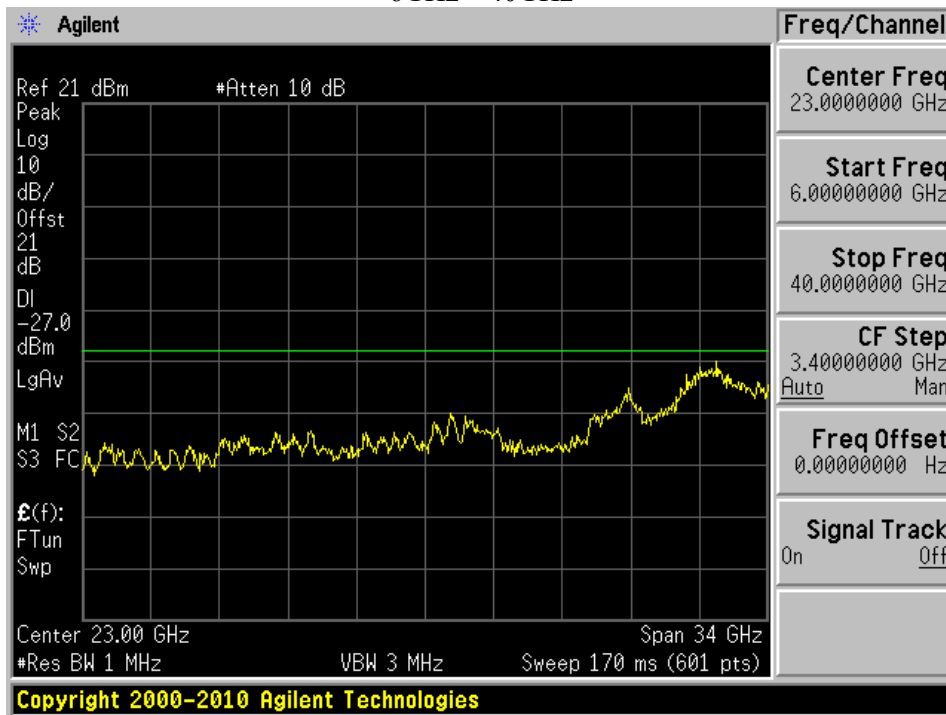


High Channel

30MHz – 6GHz

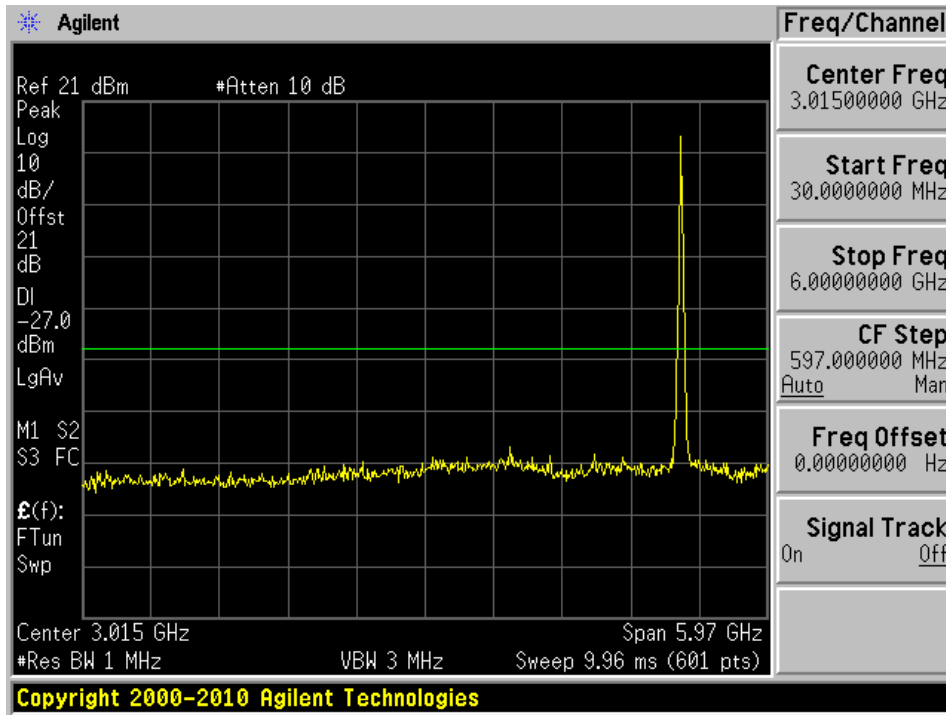

High Channel


6GHz – 40GHz

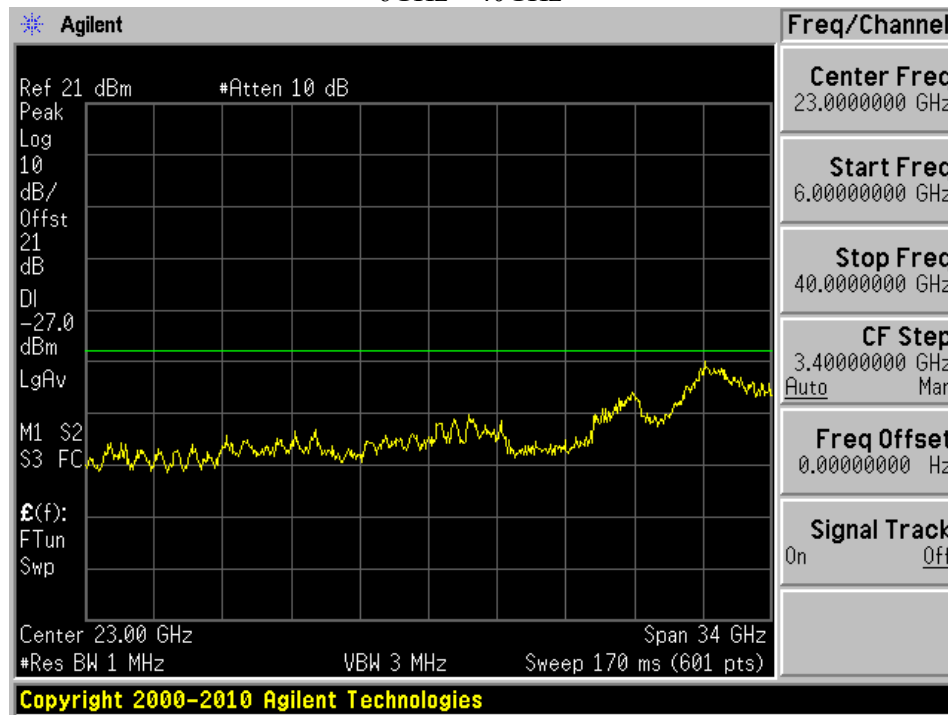

5150 - 5250 MHz 802.11n20

Low Channel

30MHz – 6GHz

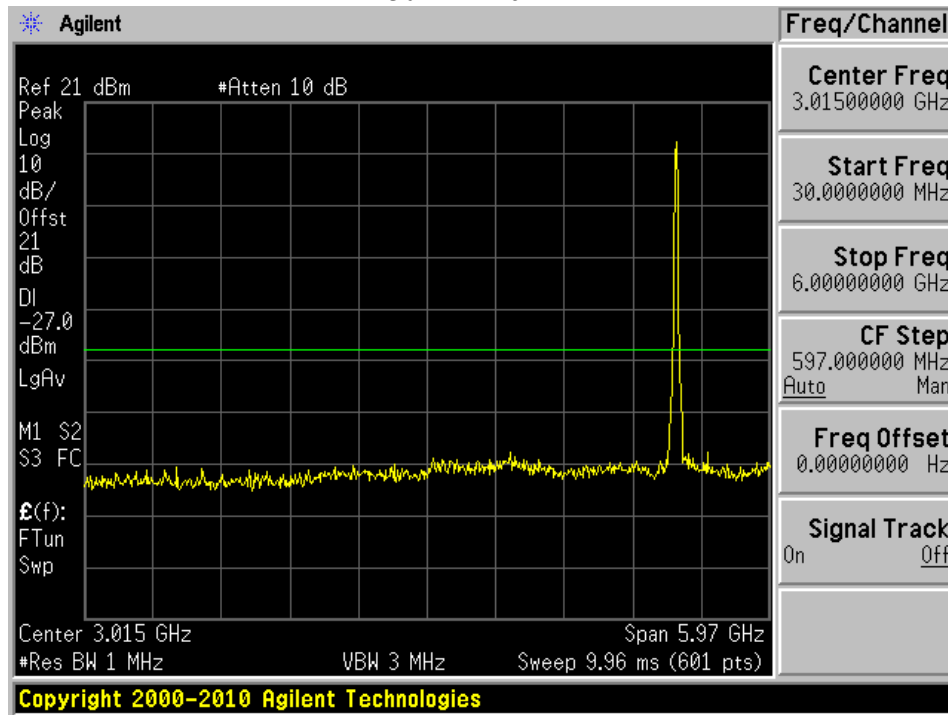


Low Channel

6GHz – 40GHz




Mid Channel

30MHz – 6GHz

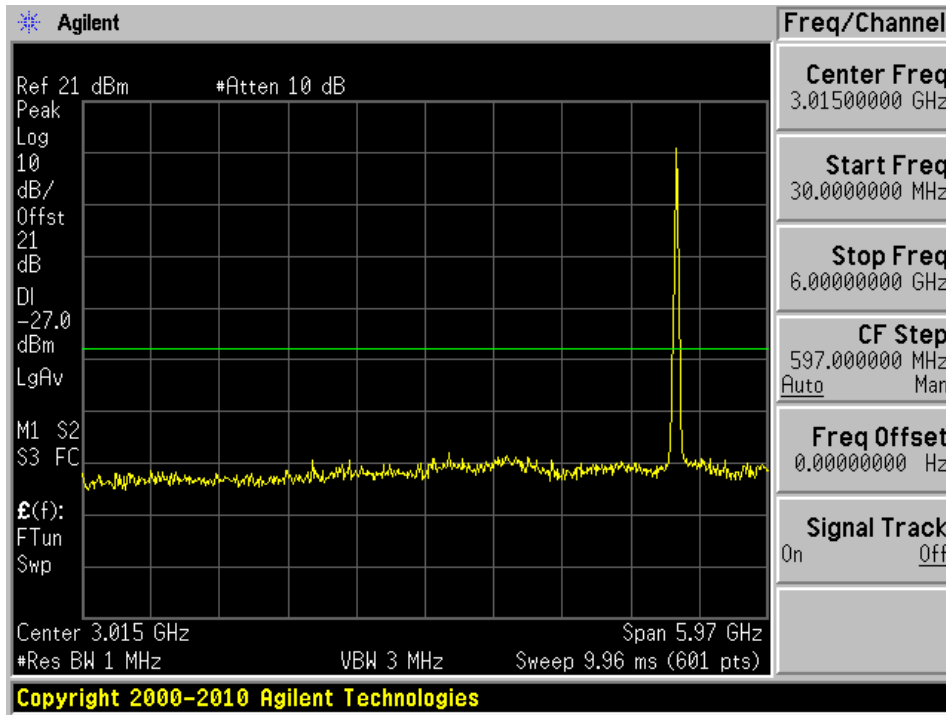


Mid Channel

6GHz – 40GHz

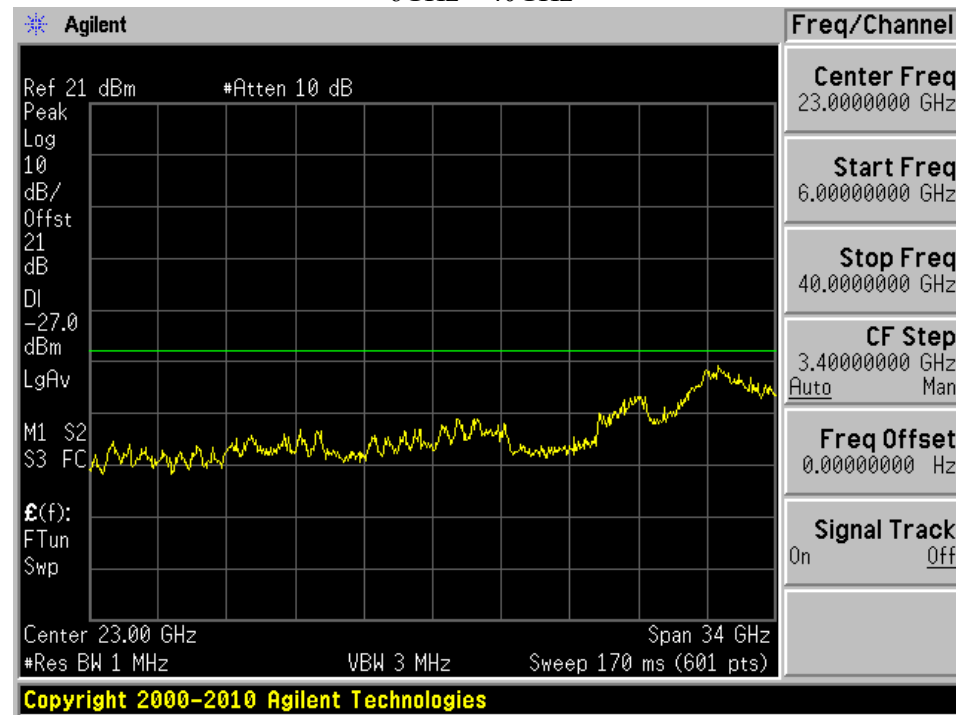


High Channel

30MHz – 6GHz

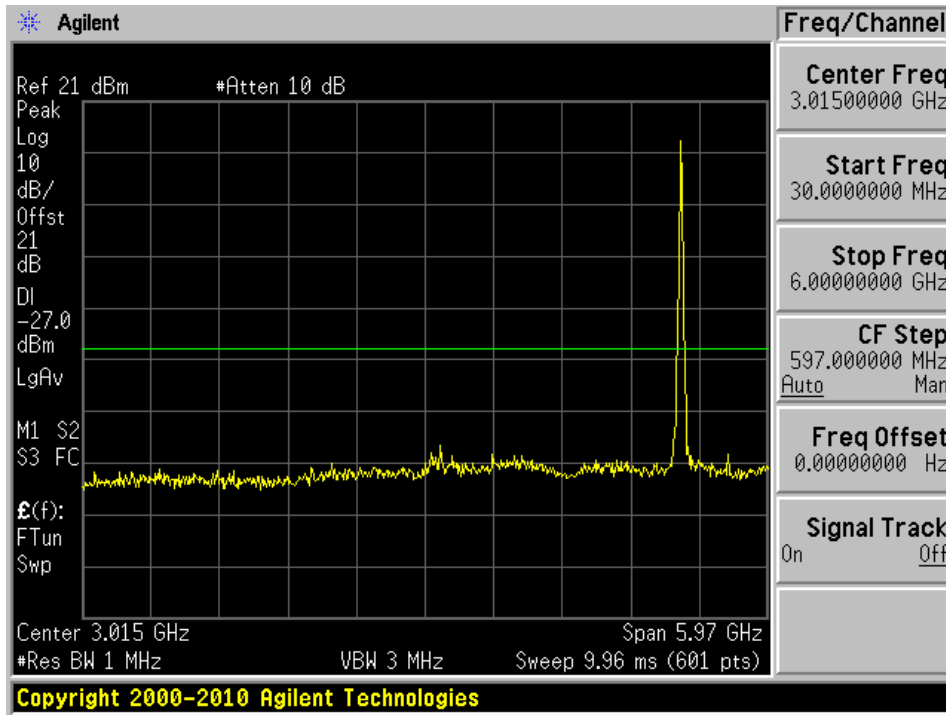

High Channel


6GHz – 40GHz

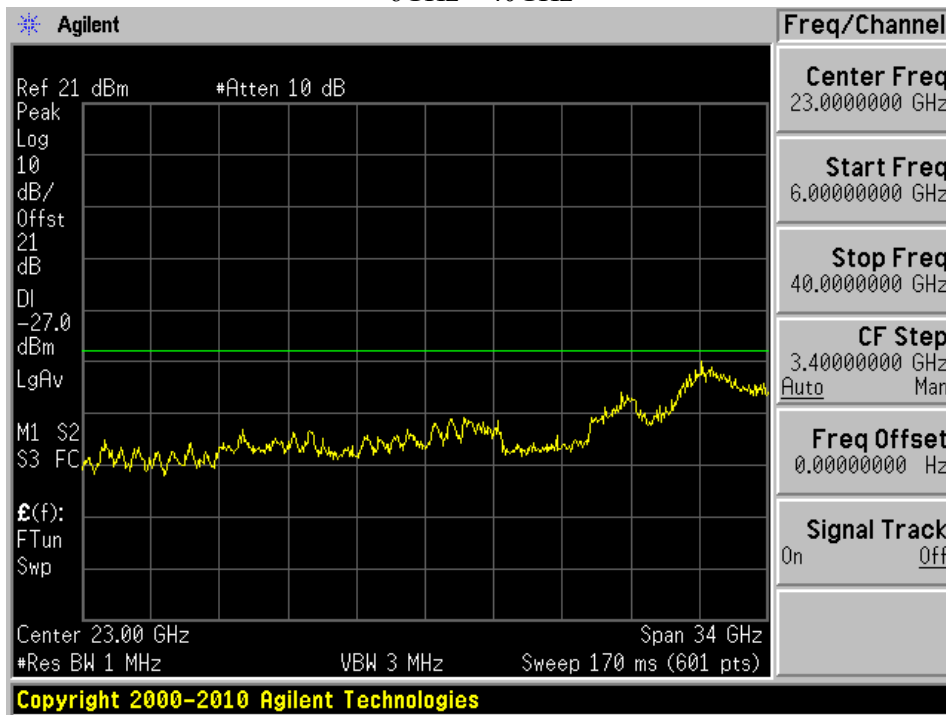

5150 - 5250 MHz 802.11n40


Low Channel

30MHz – 6GHz

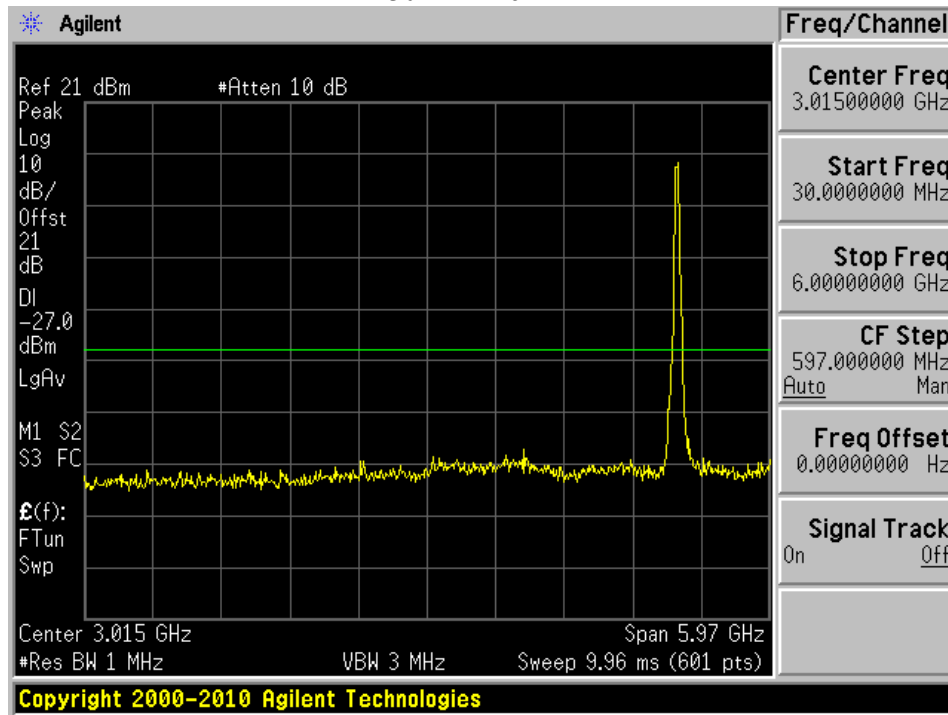


Low Channel

6GHz – 40GHz

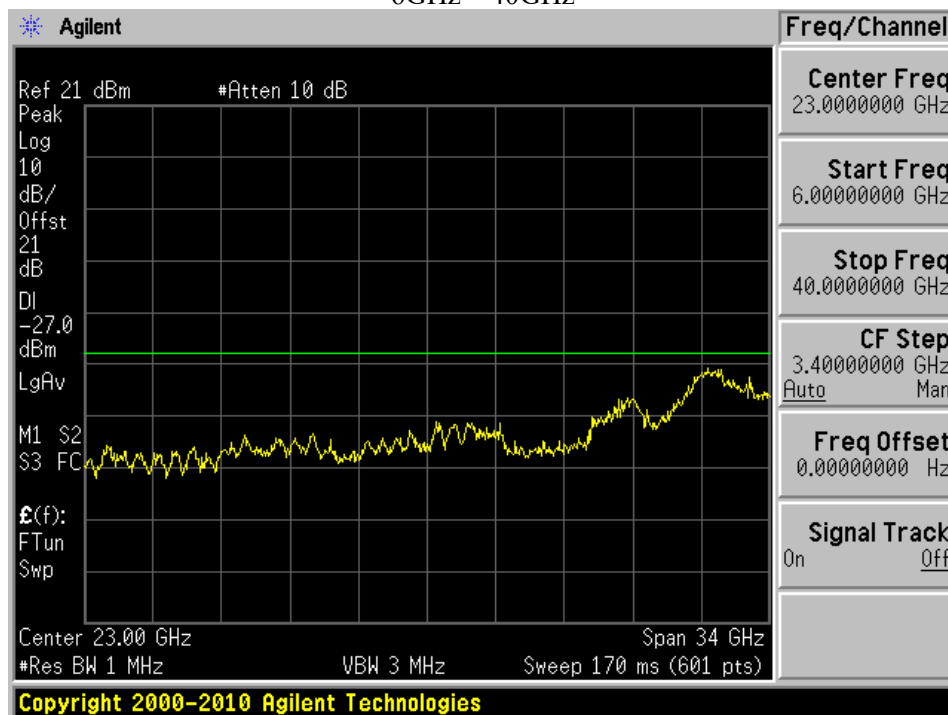


Mid Channel

30MHz – 6GHz

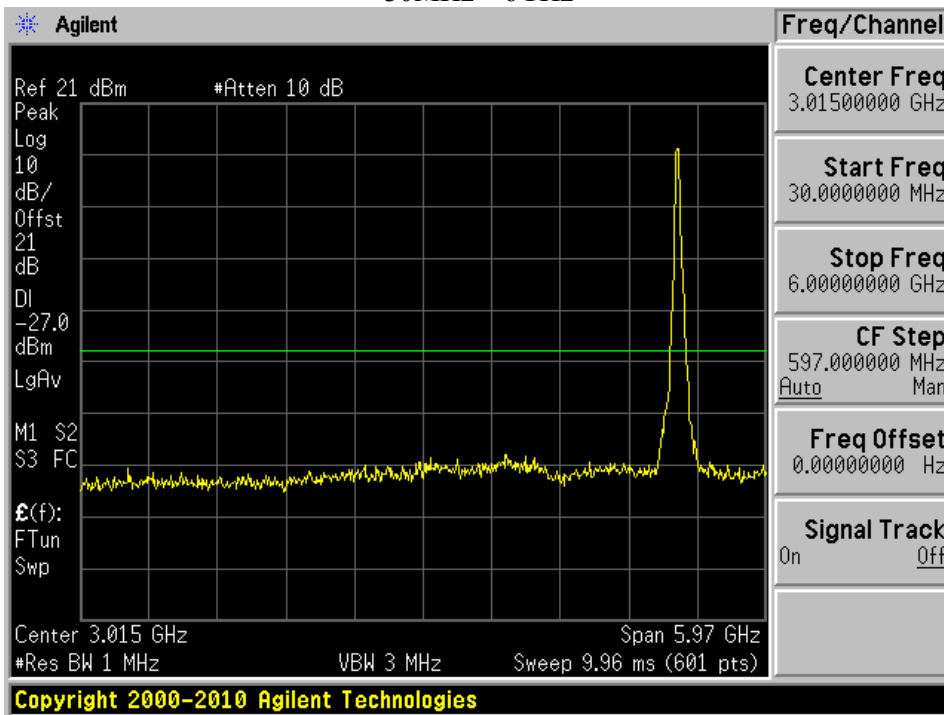

Mid Channel


6GHz – 40GHz

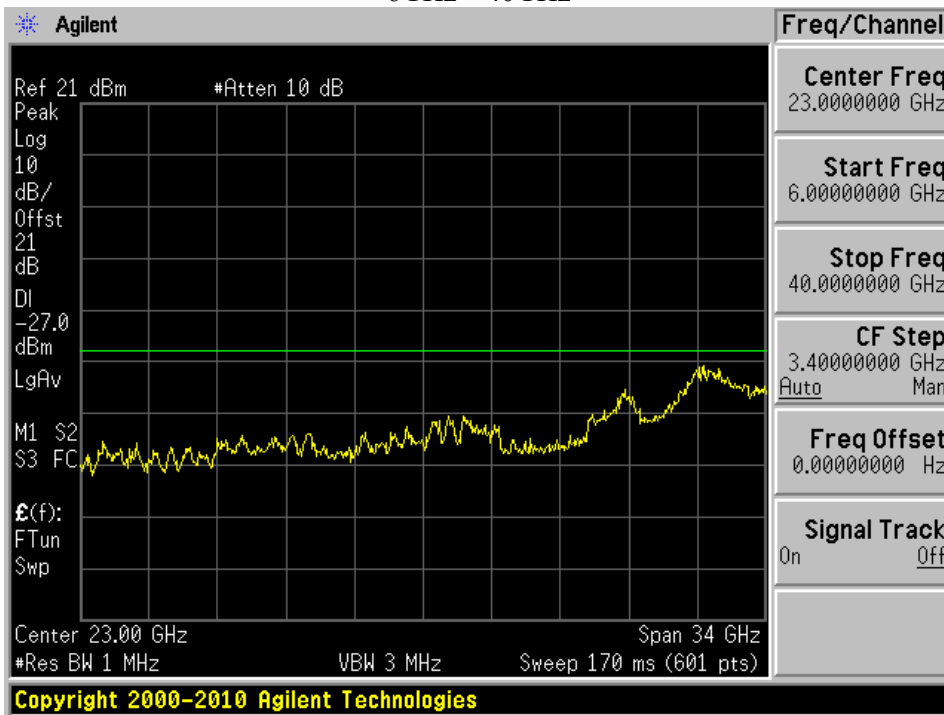

5150 - 5250 MHz 802.11ac80


Low Channel

30MHz – 6GHz

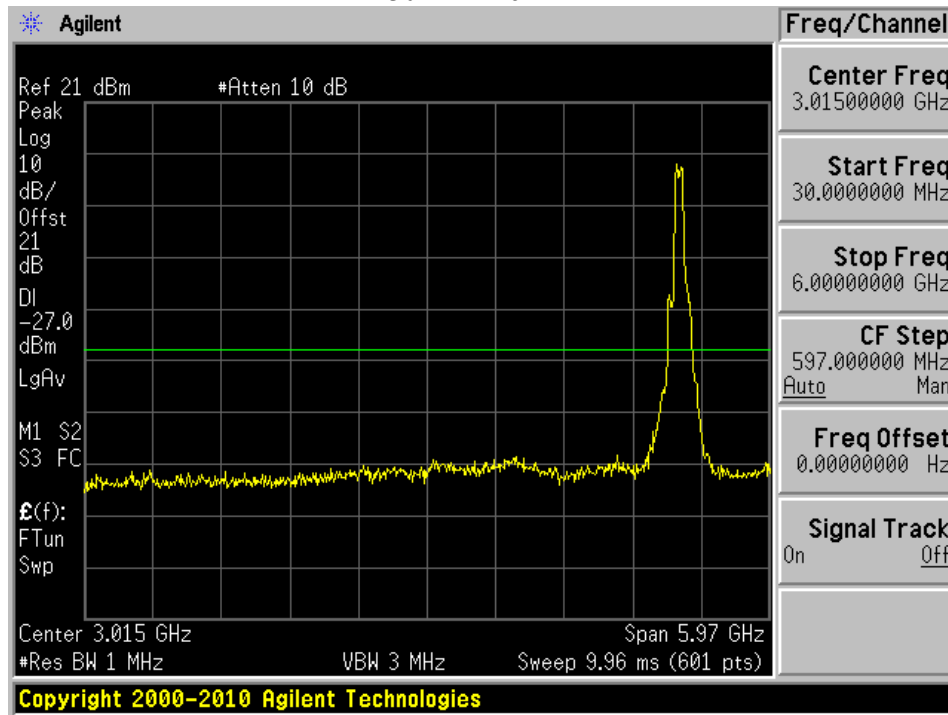

Low Channel


6GHz – 40GHz

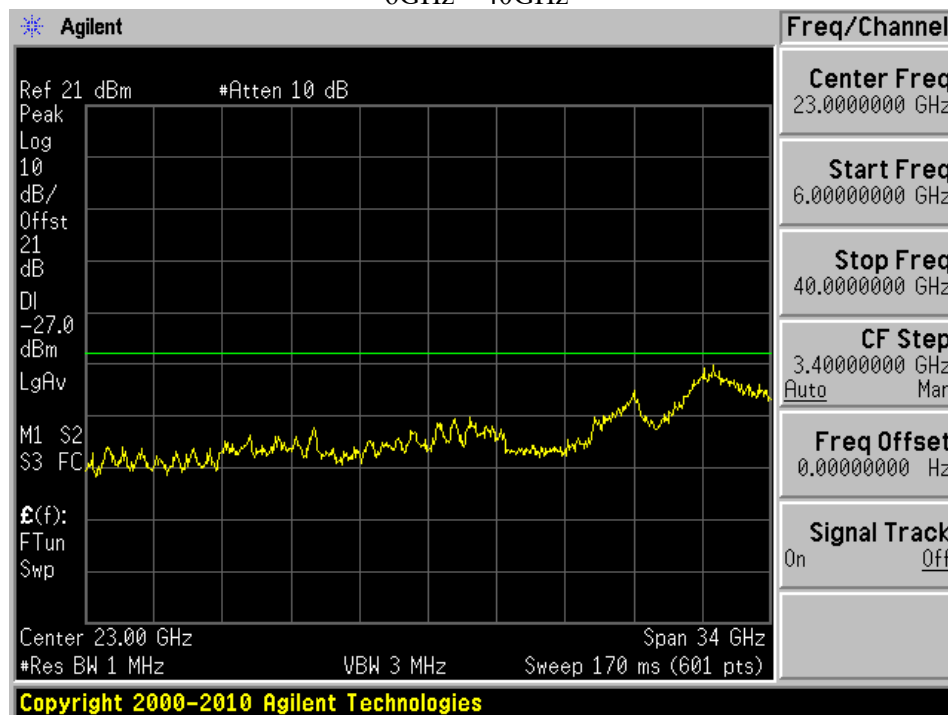

5250 - 5350 MHz 802.11a


Low Channel

30MHz – 6GHz

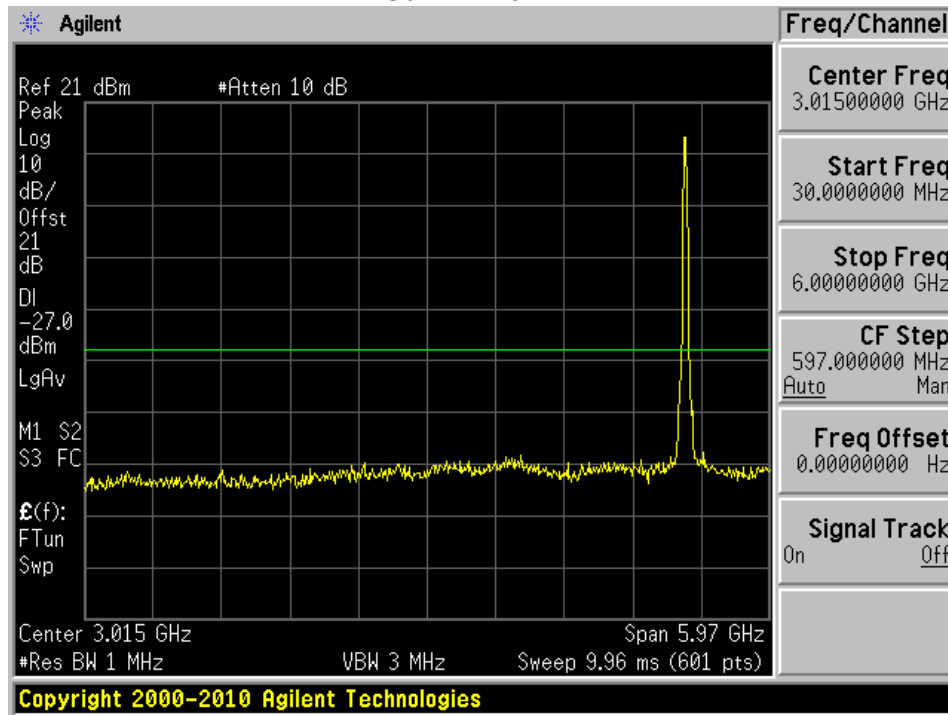


Low Channel

6GHz – 40GHz

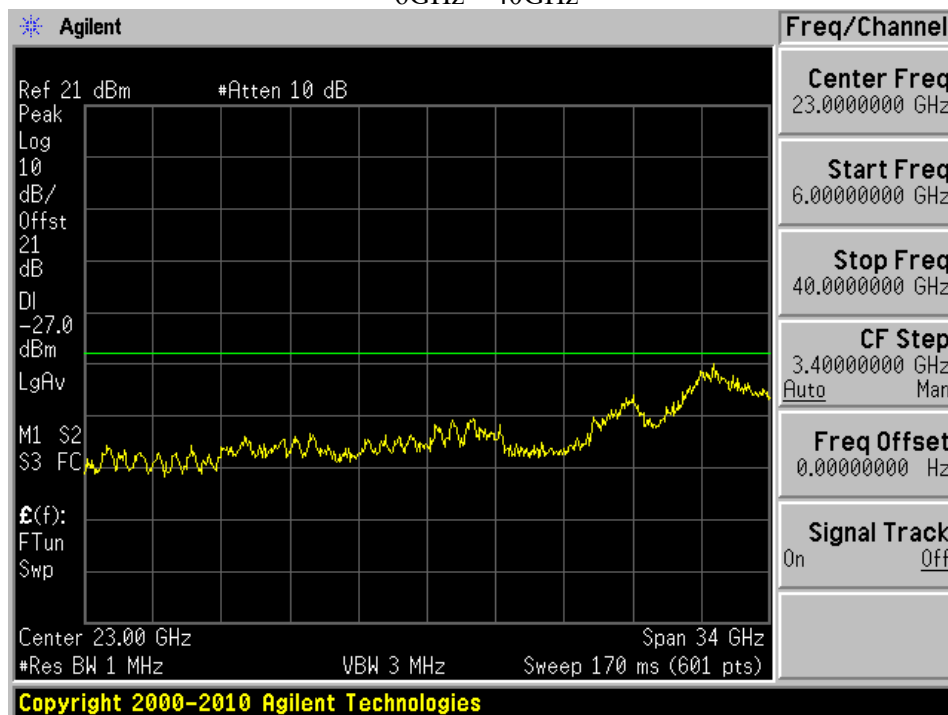


Mid Channel

30MHz – 6GHz

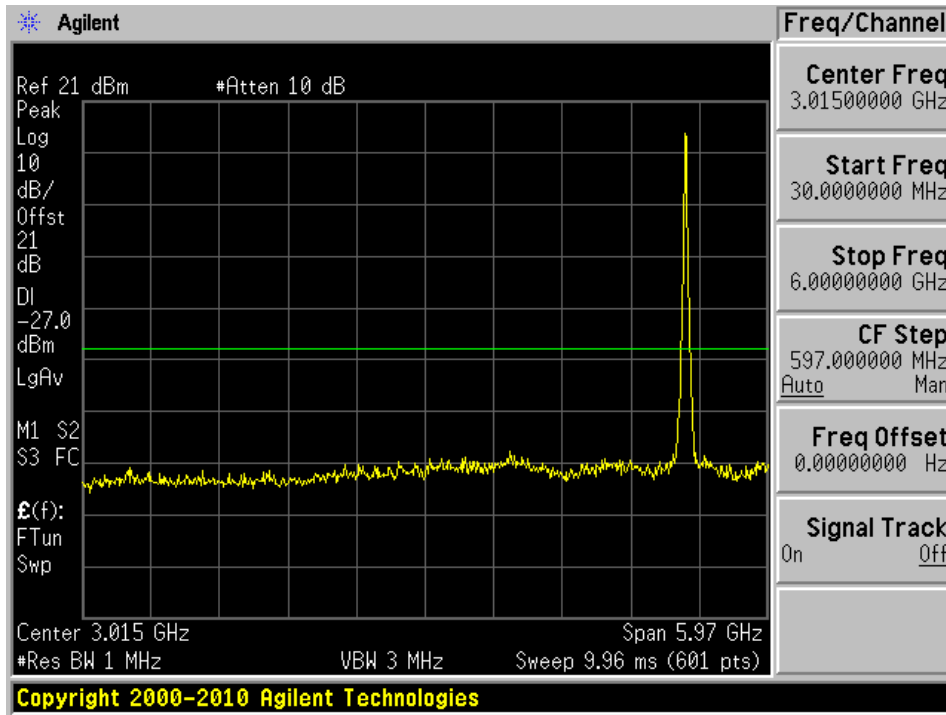


Mid Channel

6GHz- 40GHz

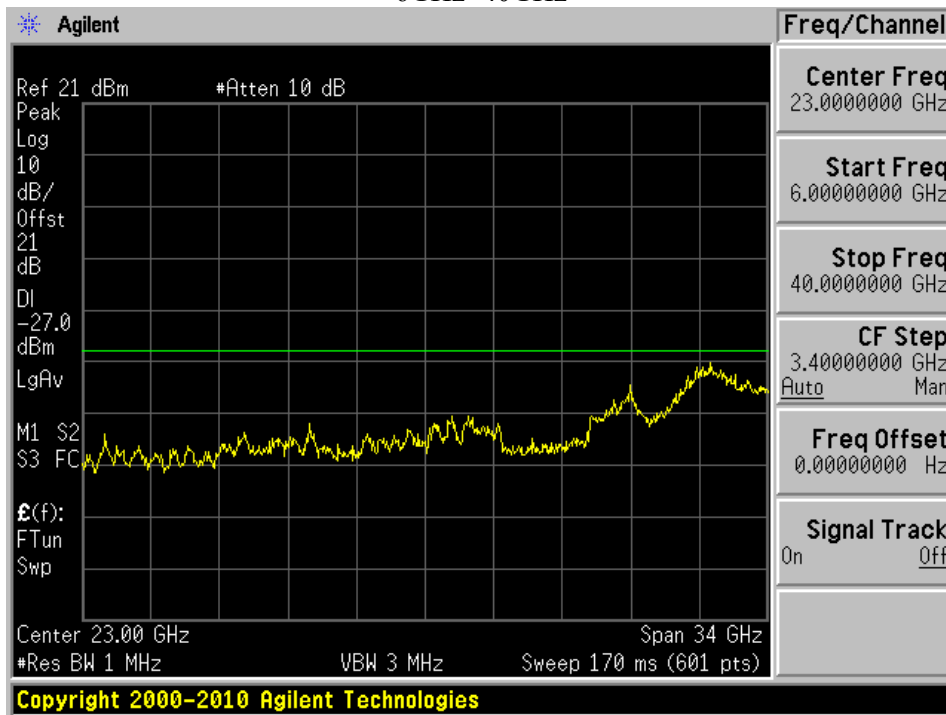


High Channel

30MHz – 6GHz

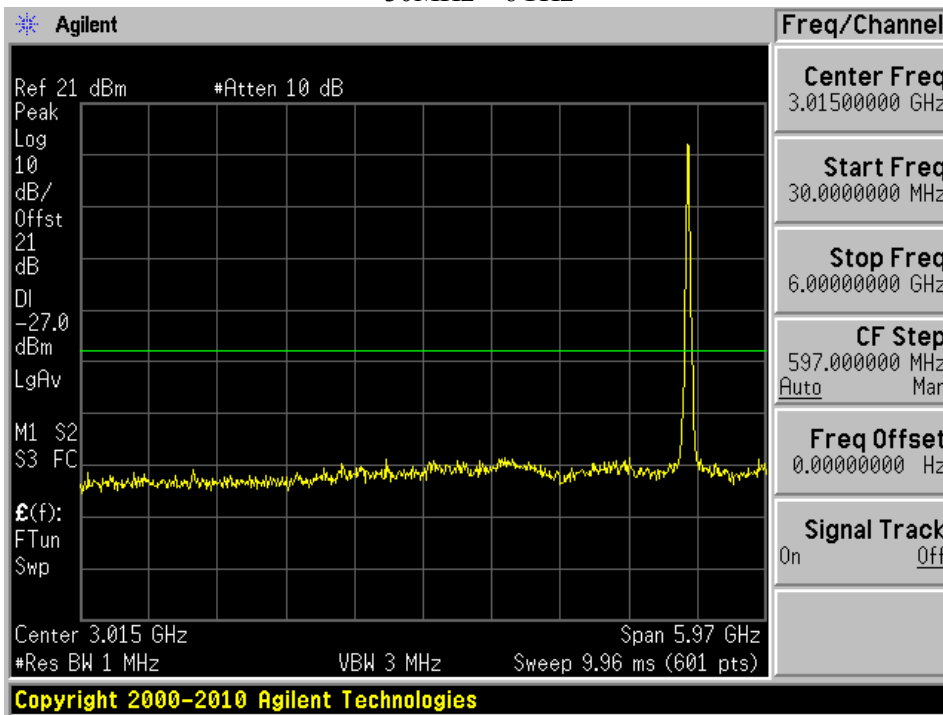

High Channel


6GHz – 40GHz

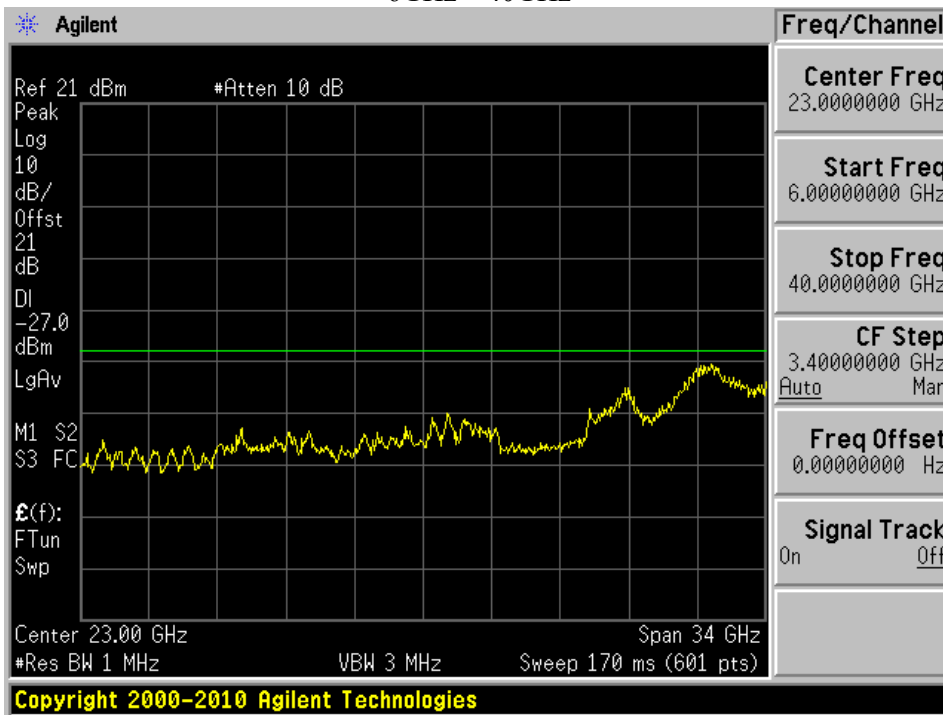

5250 - 5350 MHz 802.11n20

Low Channel

30MHz - 6GHz

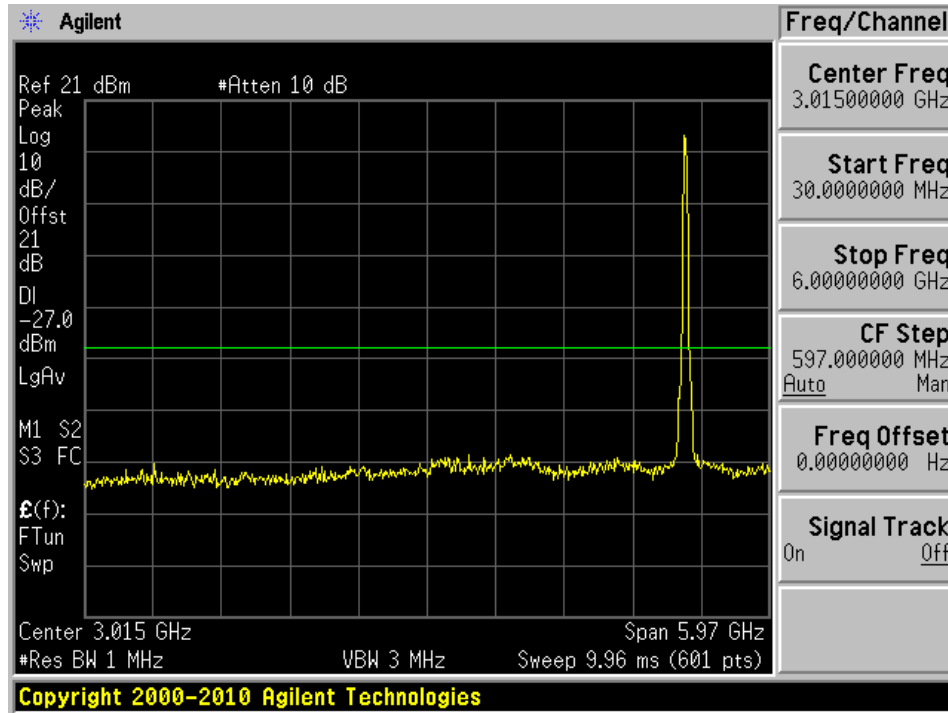


Low Channel

6GHz - 40GHz




Mid Channel

30Mhz – 6 GHz

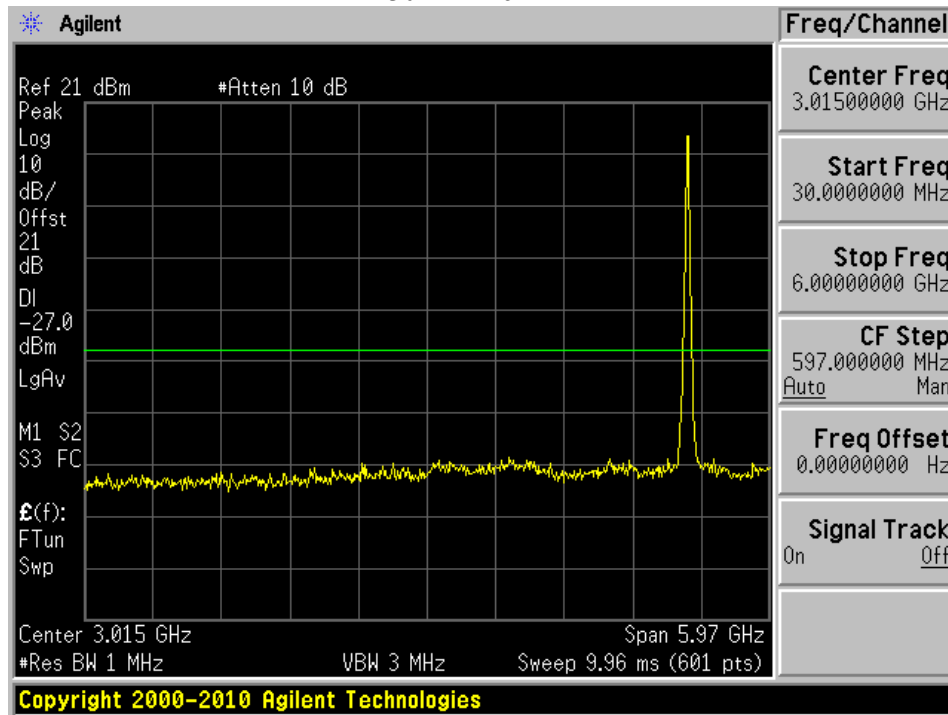


Mid Channel

6GHz – 40GHz

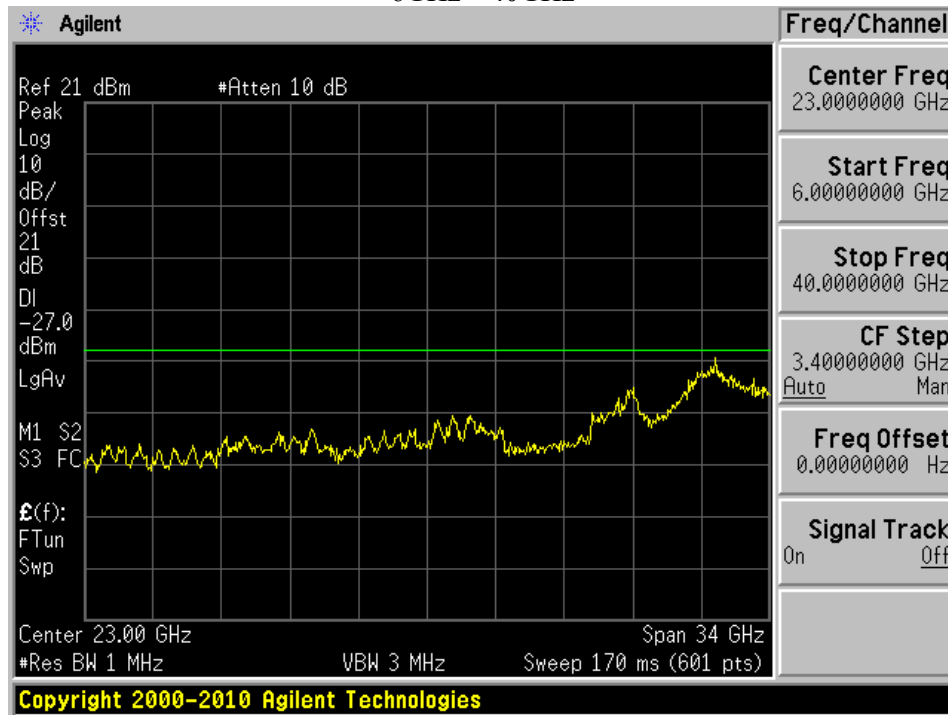


High Channel

30MHz – 6GHz

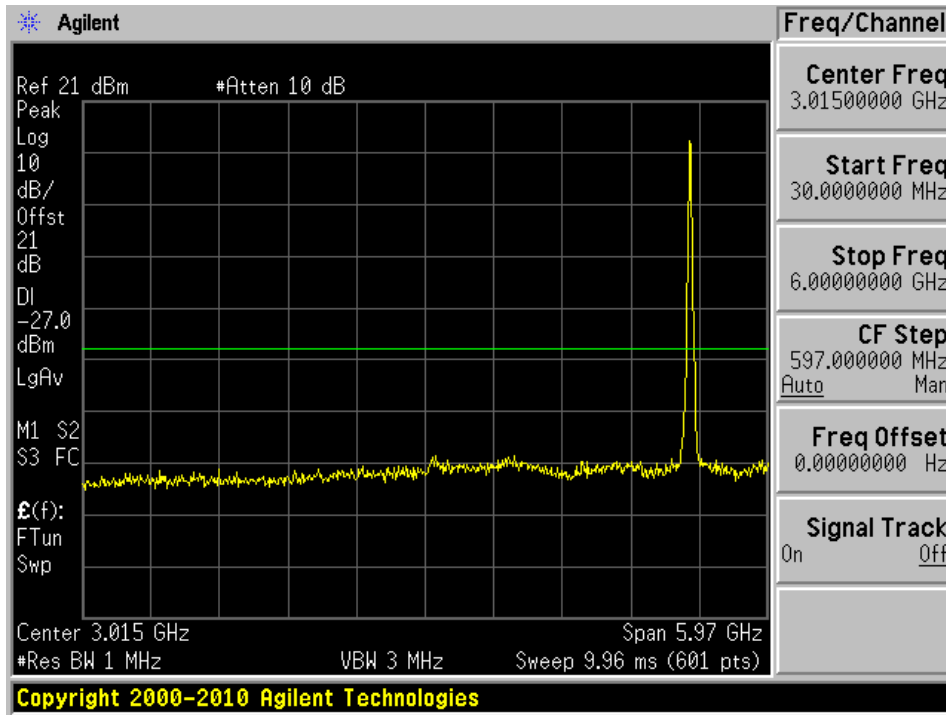

High Channel


6GHz – 40GHz

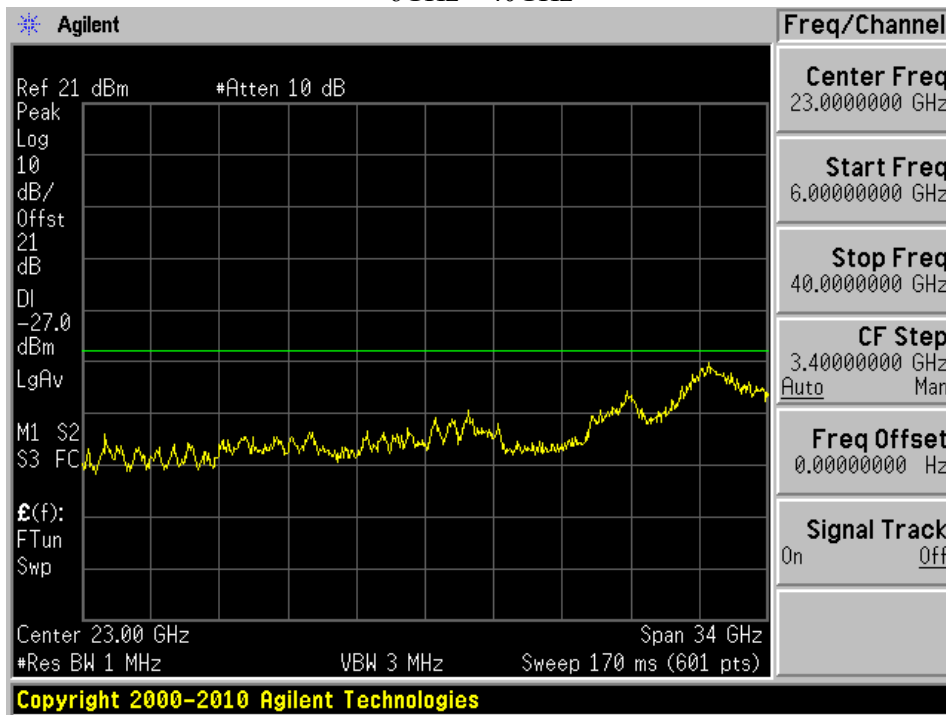

5250 - 5350 MHz 802.11n40


Low Channel

30MHz – 6GHz

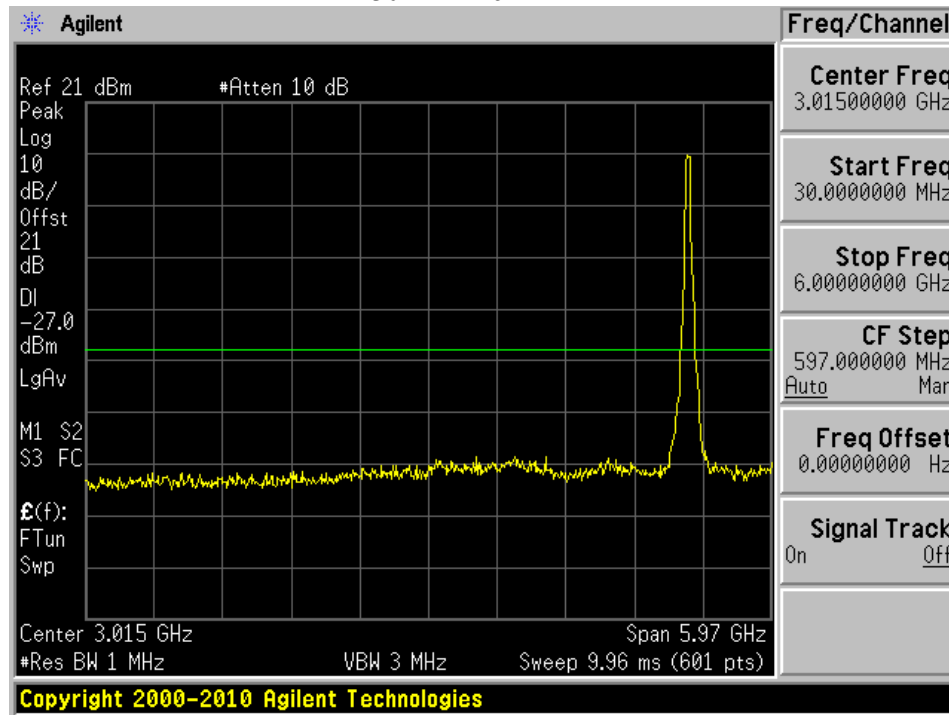


Low Channel

6GHz – 40GHz

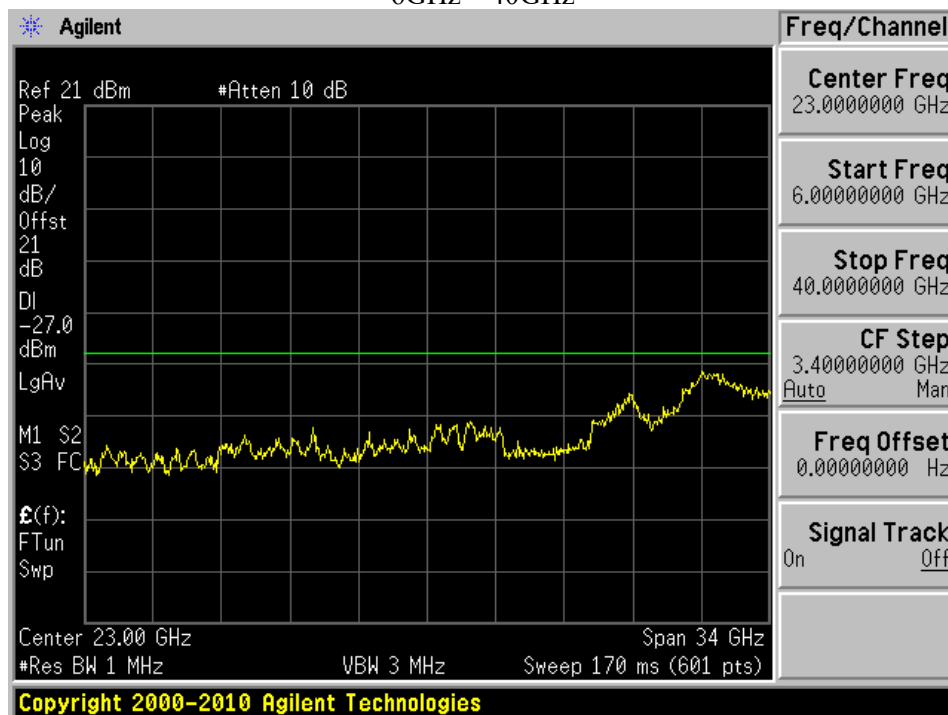


Mid Channel

30MHz – 6GHz

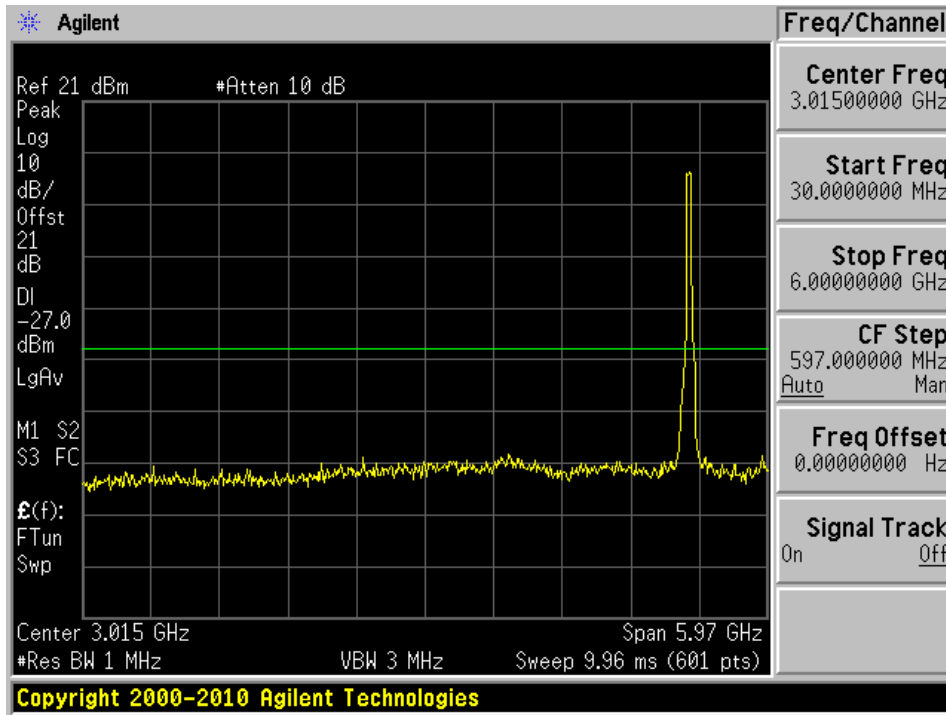

Mid Channel


6GHz – 40GHz

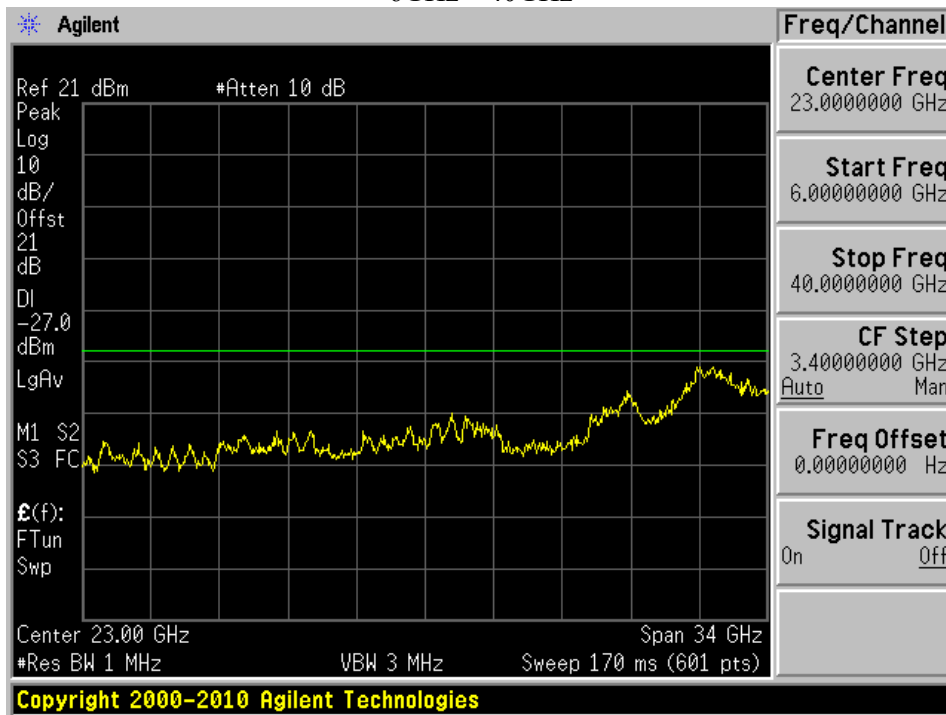

5250 - 5350 MHz 802.11ac80


Low Channel

30MHz – 6GHz

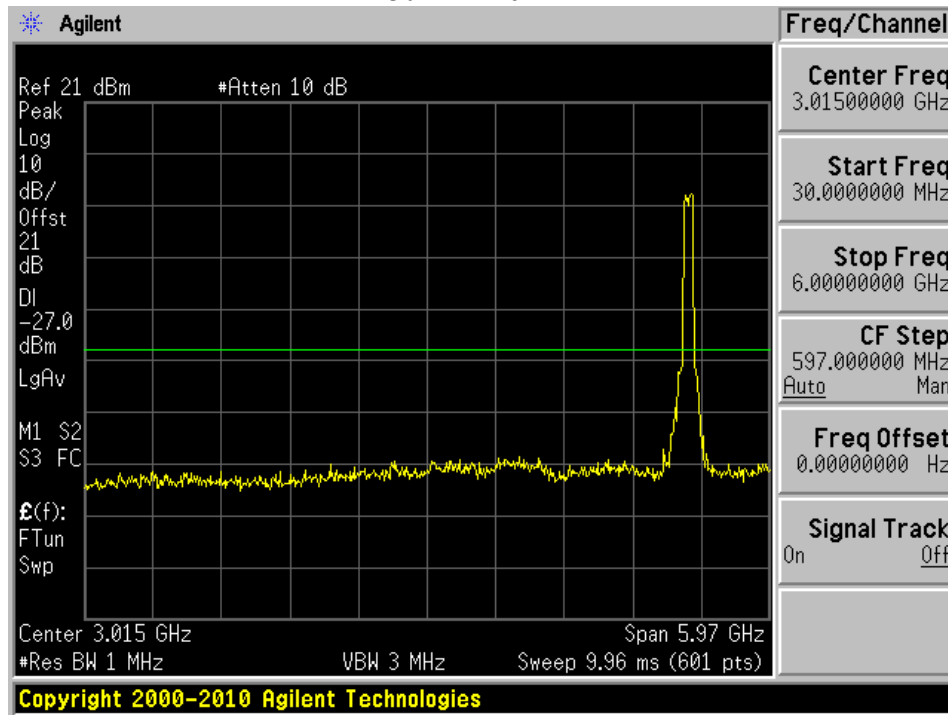

Low Channel


6GHz – 40GHz

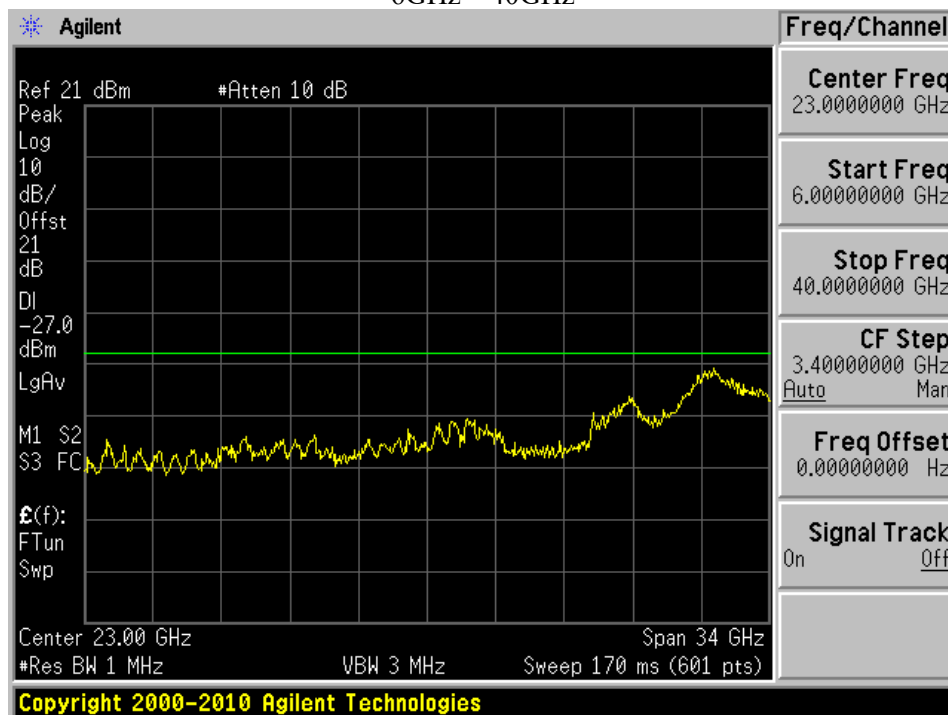

5470MHz – 5725 MHz 802.11a

Low Channel

30MHz – 6GHz

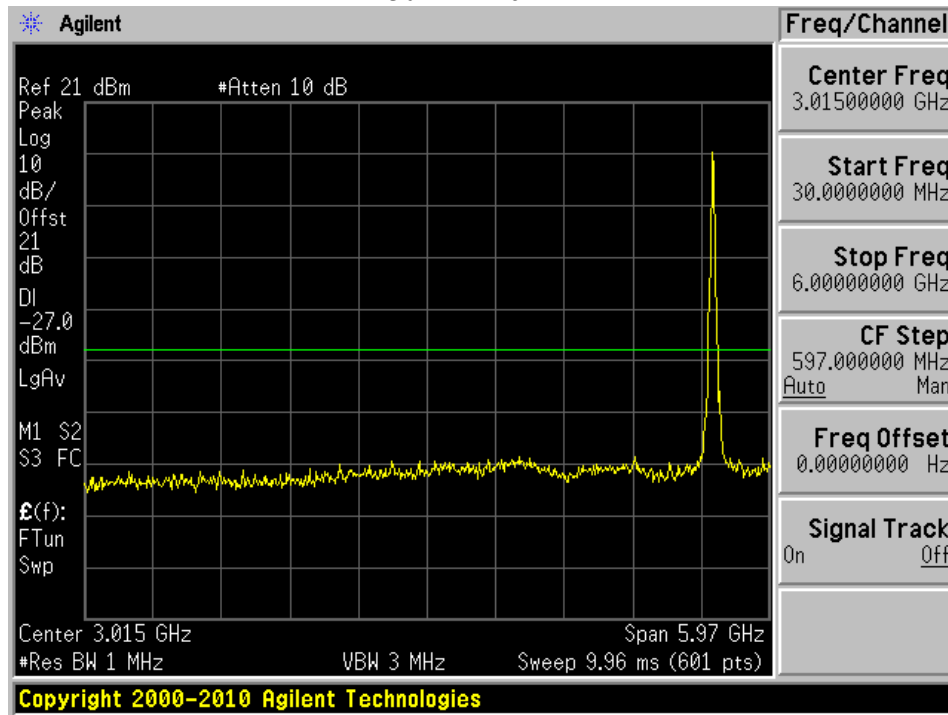


Low Channel

6GHz – 40GHz




Mid Channel

30MHz – 6GHz

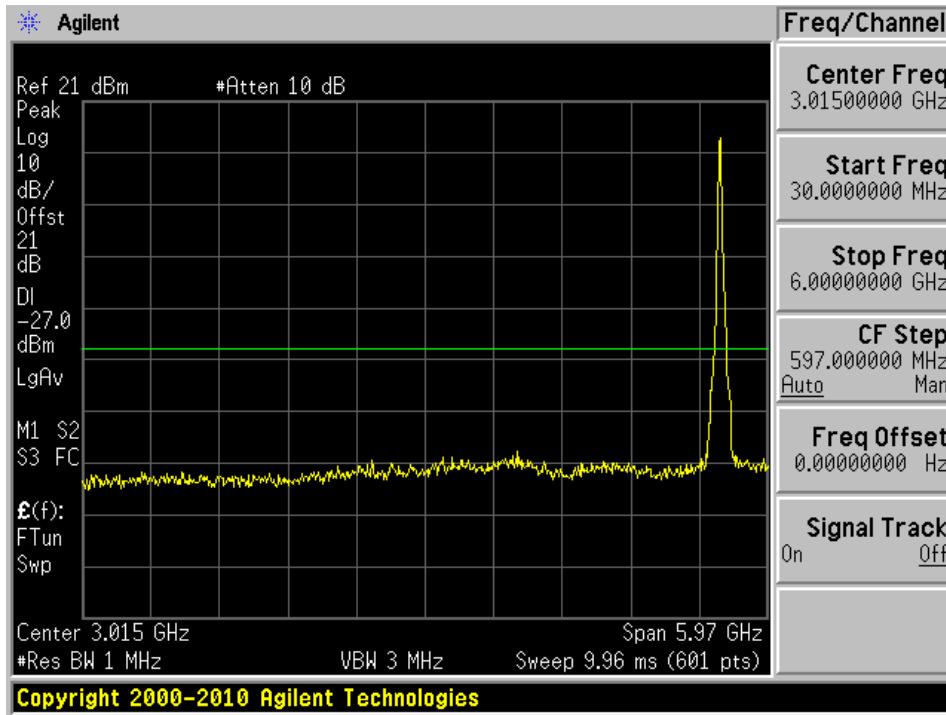


Mid Channel

6GHz – 40GHz

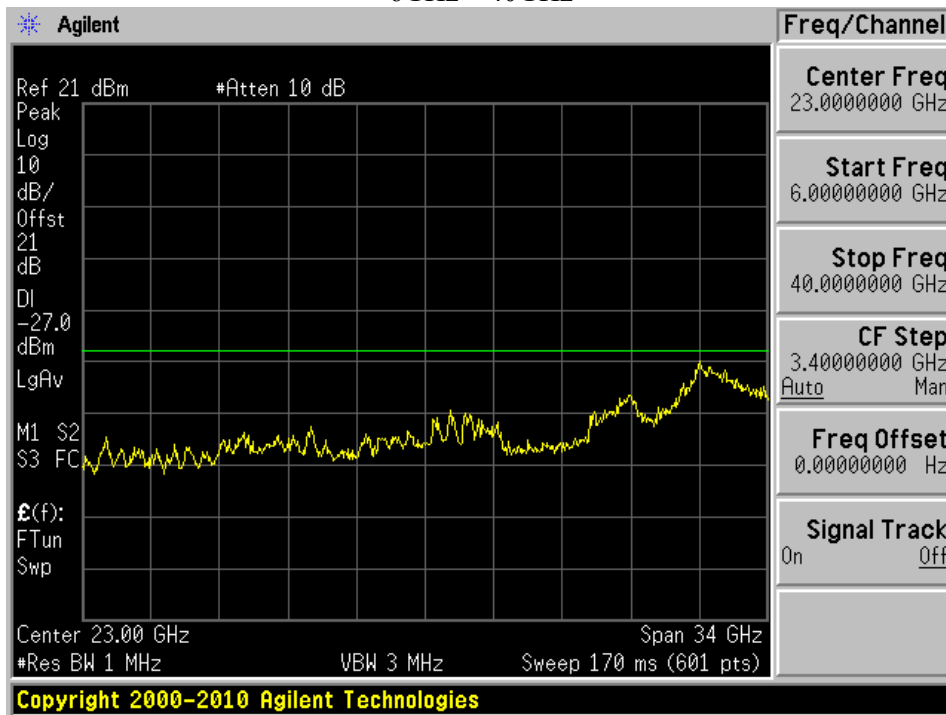


High Channel

30MHz – 6GHz

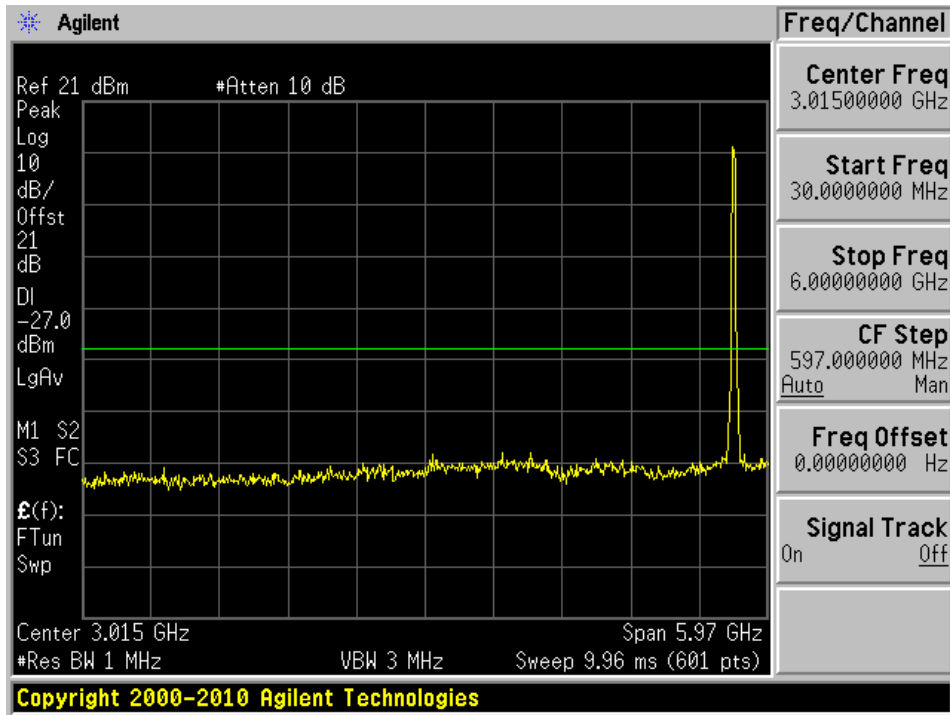

High Channel


6GHz – 40GHz

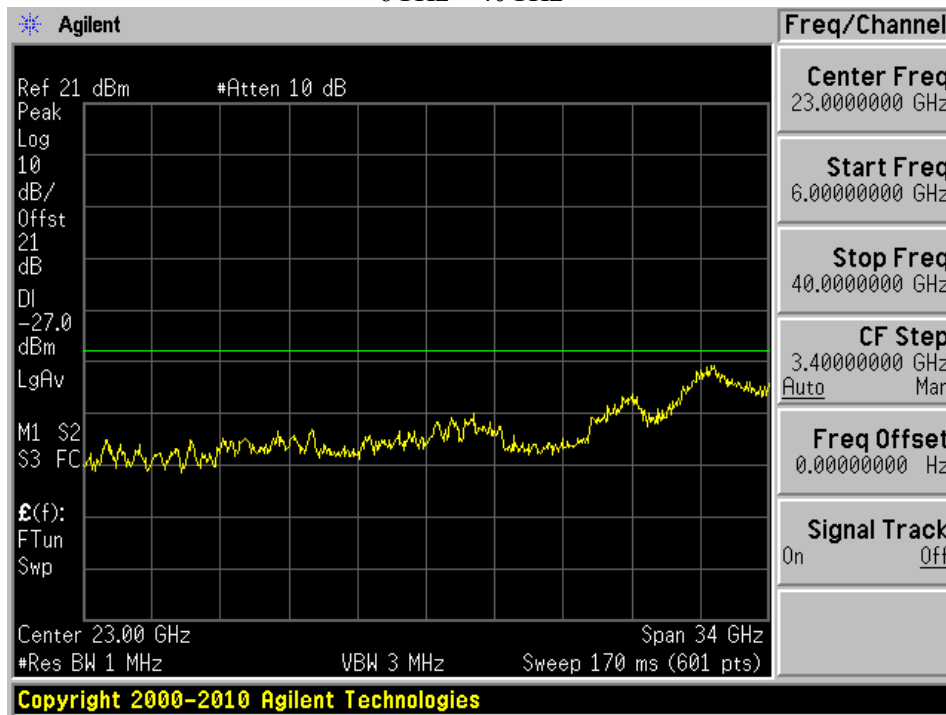

5470MHz – 5725 MHz 802.11n20


Low Channel

30MHz – 6GHz

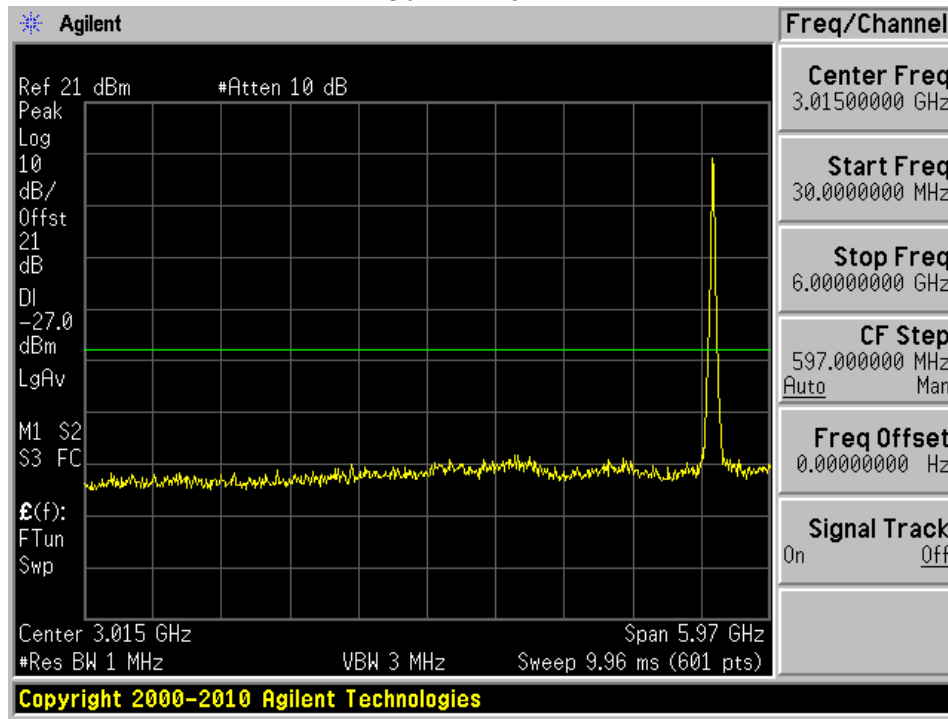


Low Channel

6GHz – 40GHz

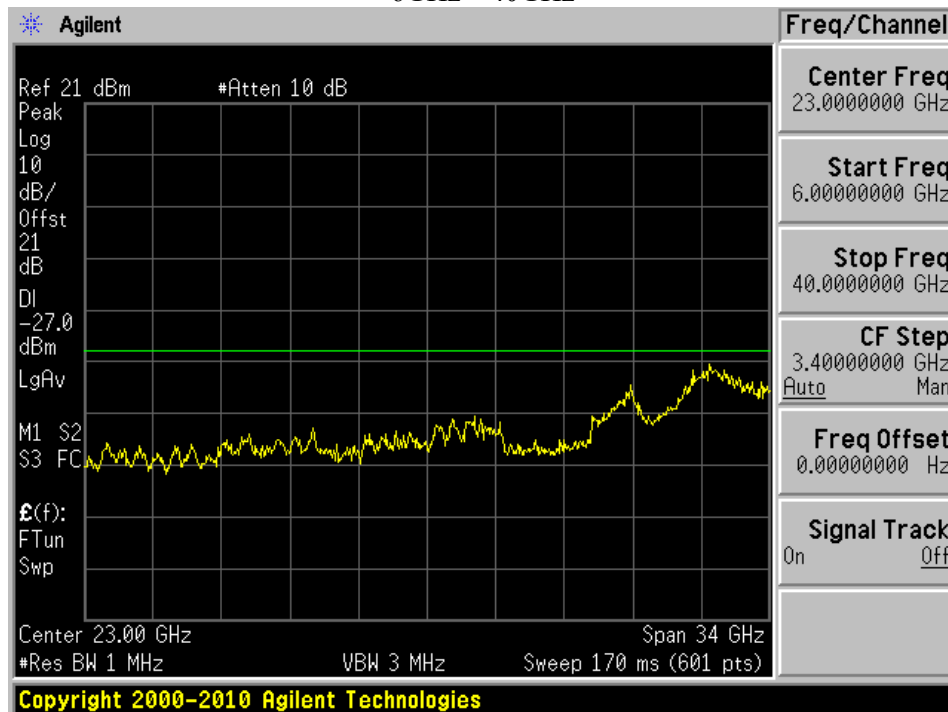


Mid Channel

30MHz – 6GHz

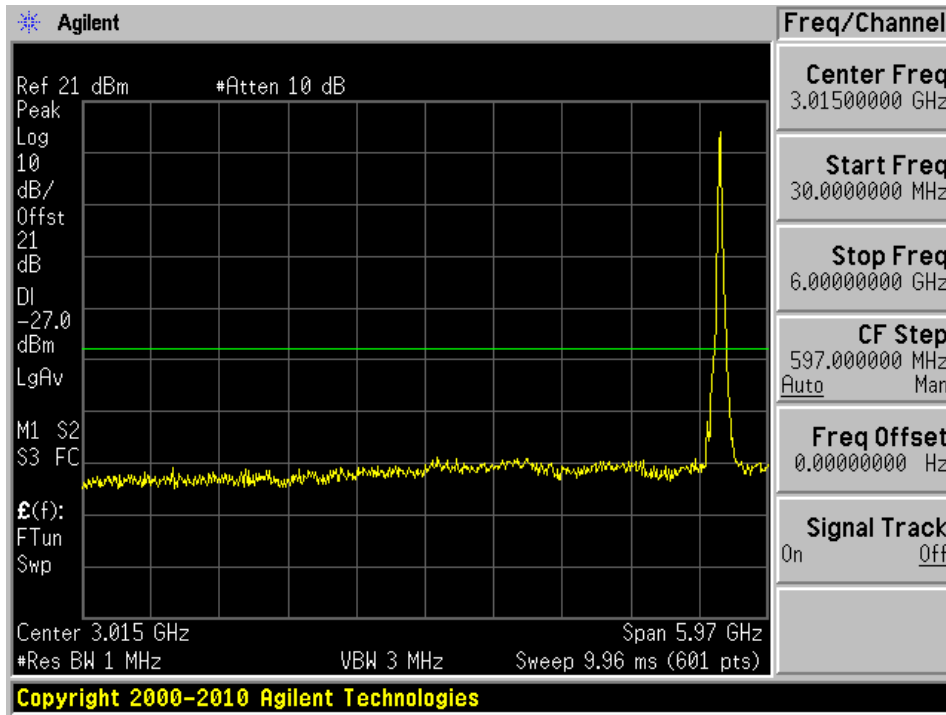


Mid Channel

6GHz – 40GHz

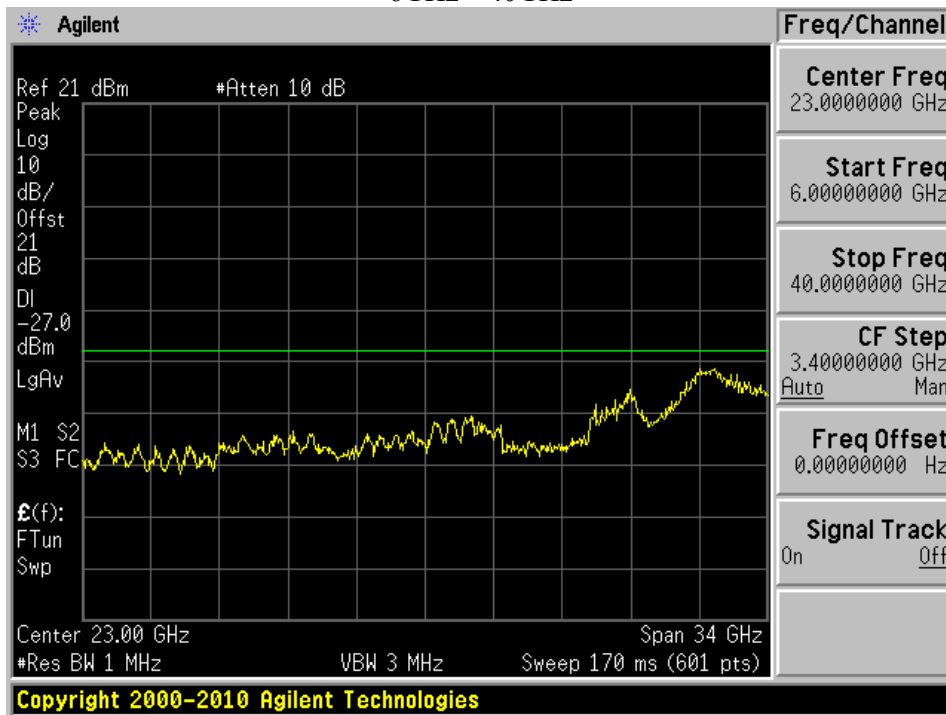


High Channel

30MHz – 6GHz

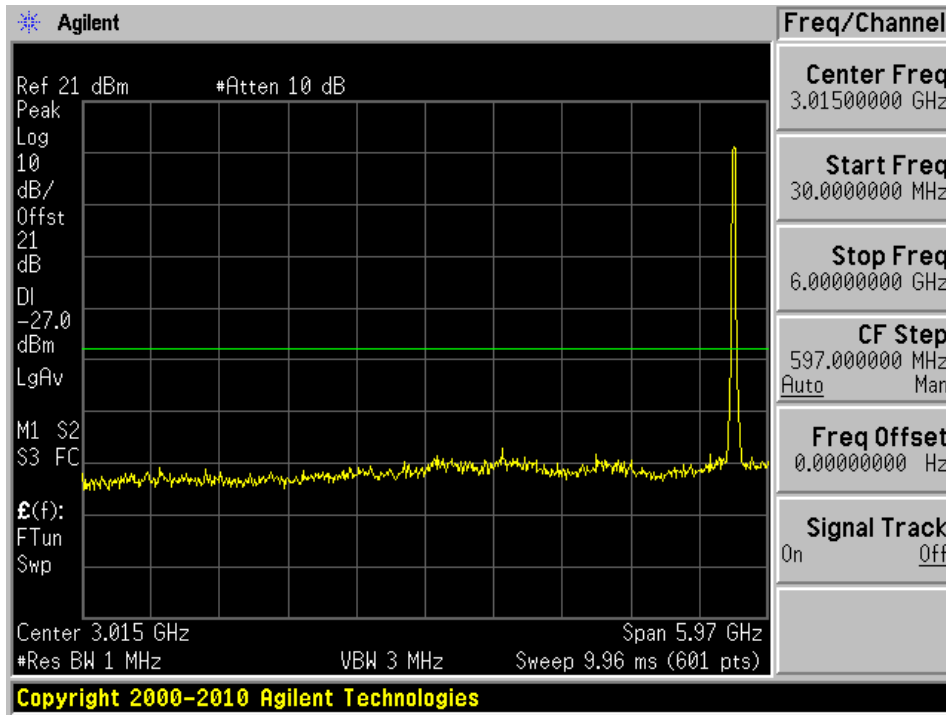

High Channel


6GHz – 40GHz

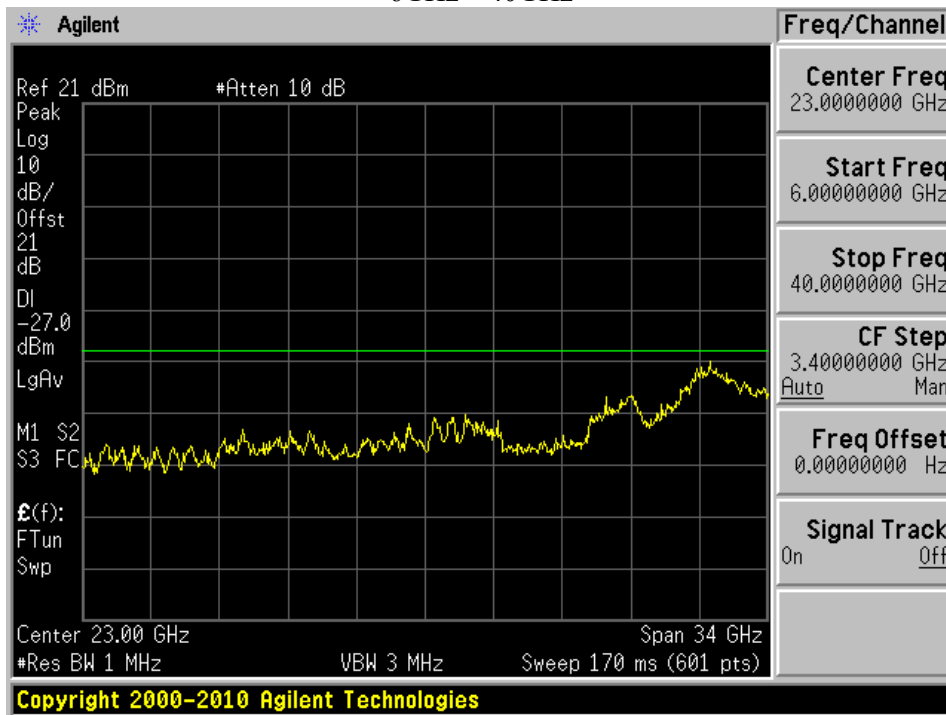

5470MHz – 5725 MHz 802.11n40


Low Channel

30MHz – 6GHz

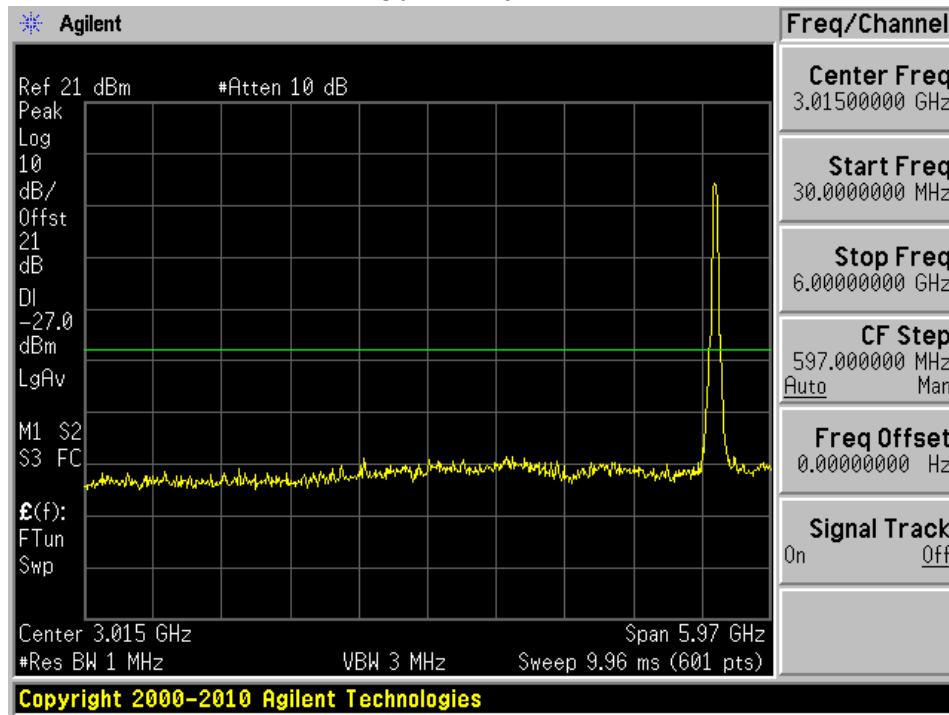


Low Channel

6GHz – 40GHz

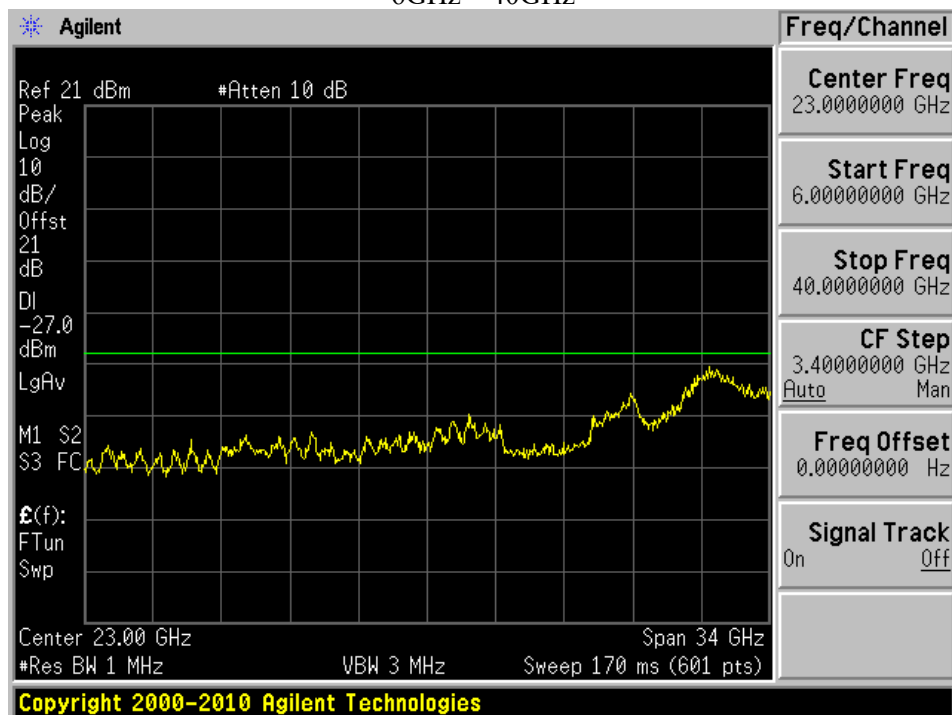


Mid Channel

30MHz – 6GHz

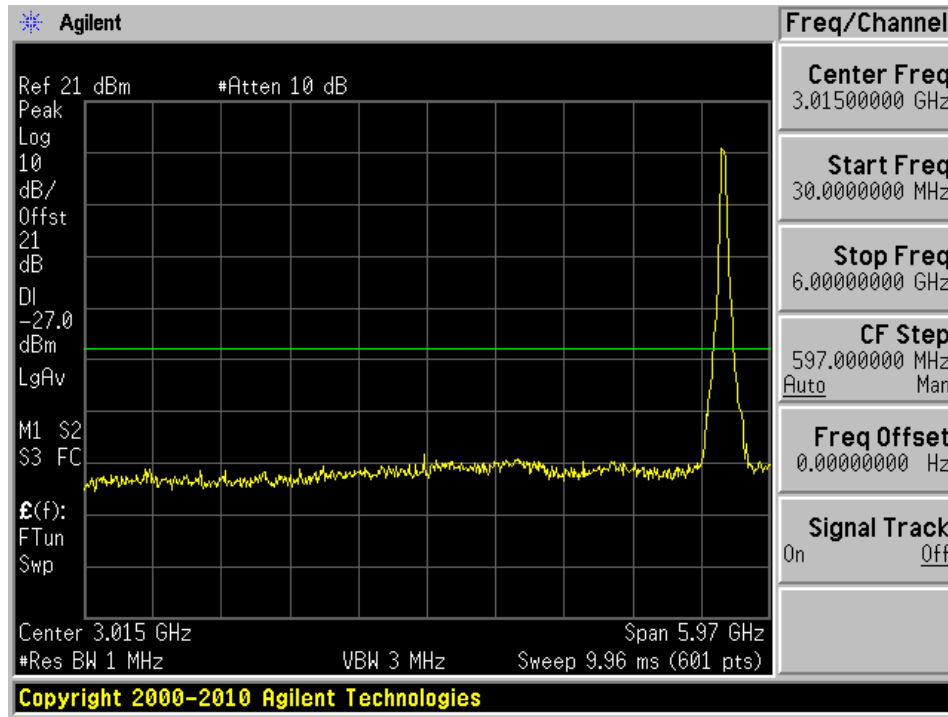


Mid Channel

6GHz – 40GHz

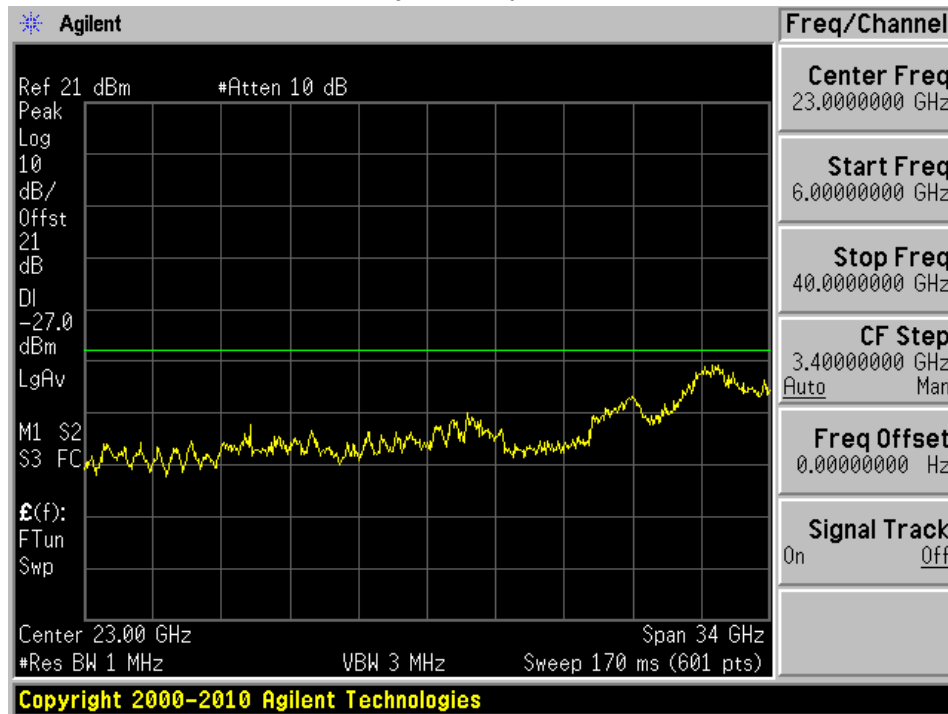


High Channel

30MHz – 6GHz

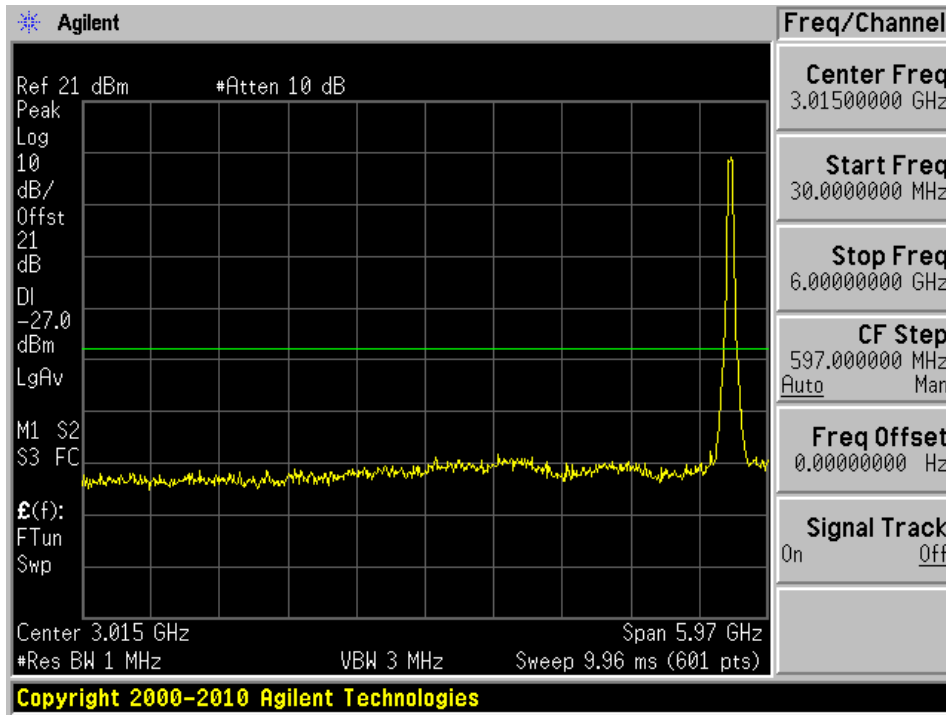

High Channel


6GHz – 40GHz

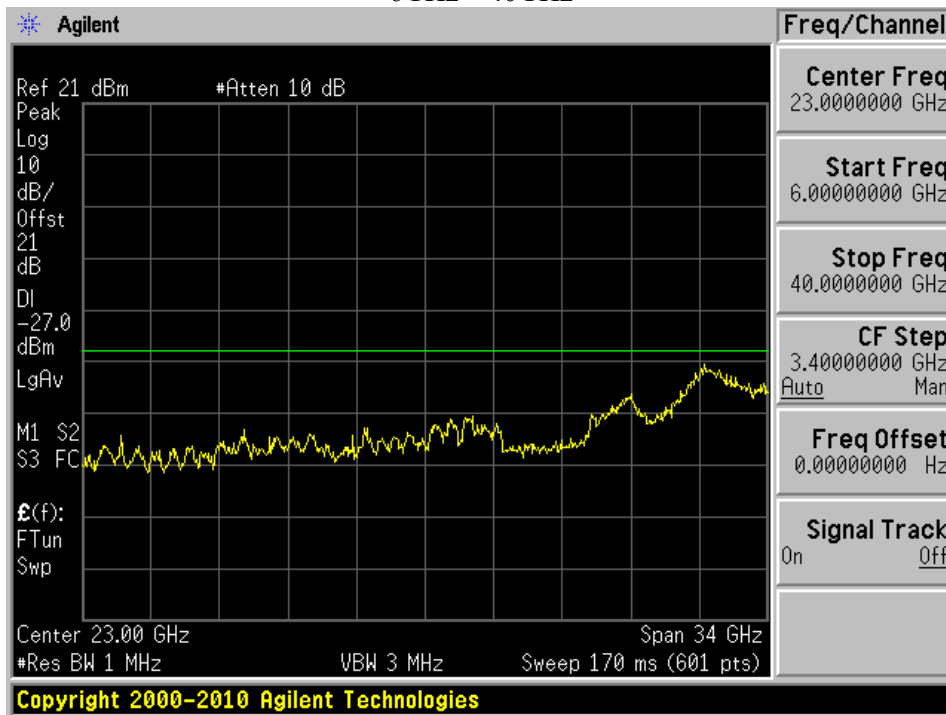

5470MHz – 5725 MHz 802.11ac80


Low Channel

30MHz – 6GHz

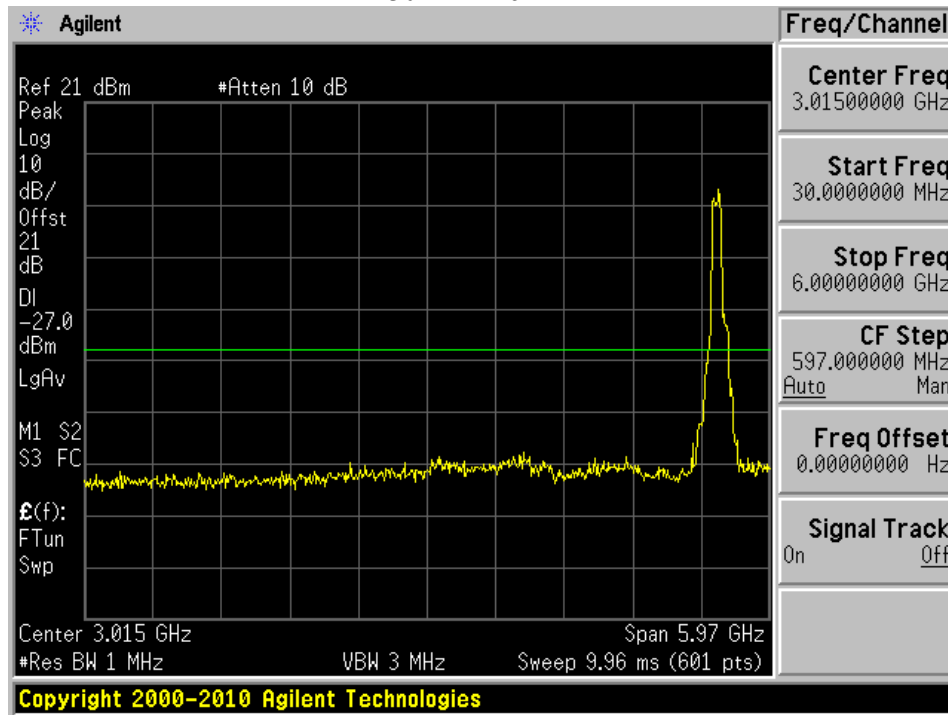


Low Channel

6GHz – 40GHz

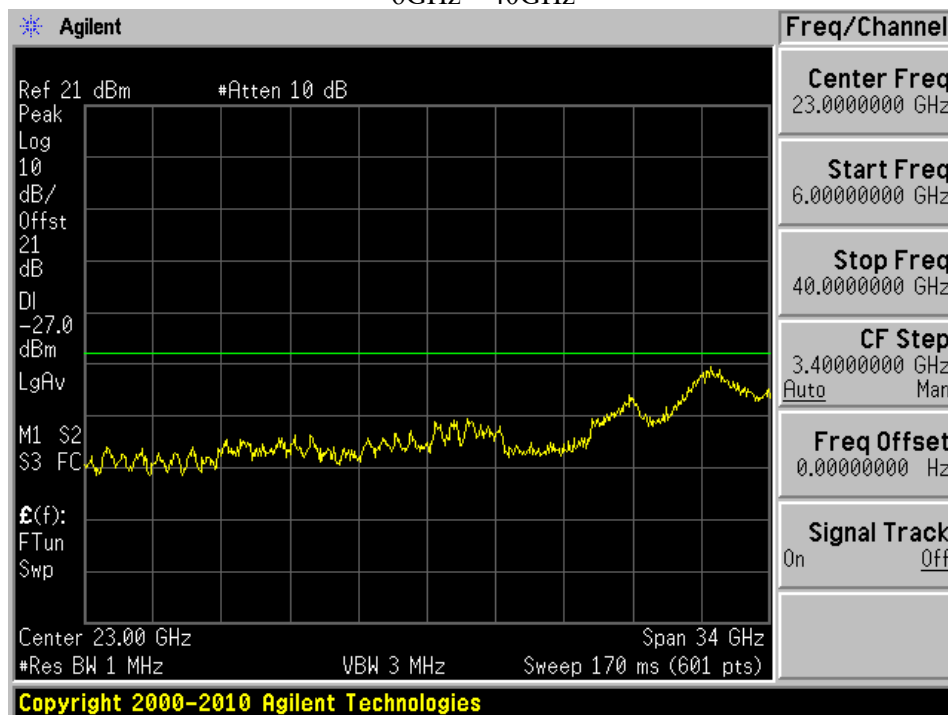


Mid Channel

30MHz – 6GHz

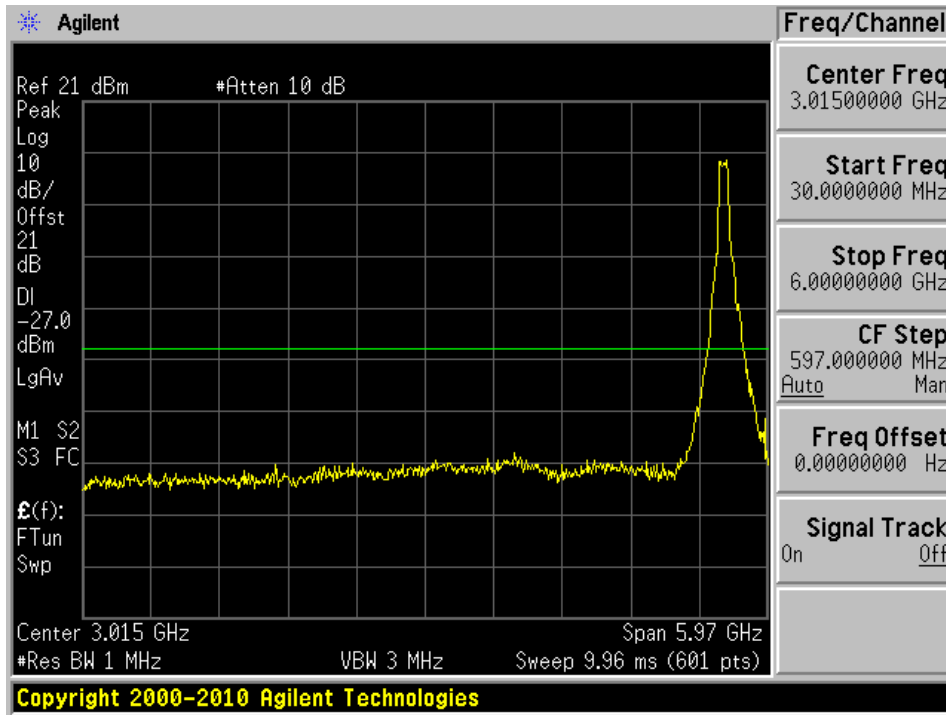

Mid Channel


6GHz – 40GHz

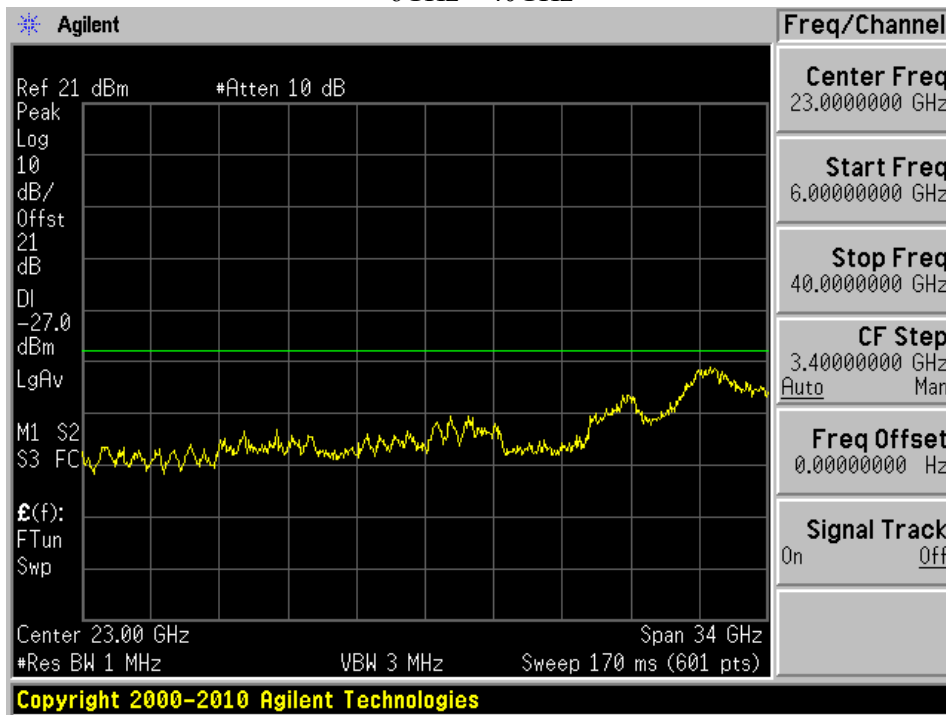

5725 - 5850 MHz 802.11n20


Low Channel

30MHz – 6GHz

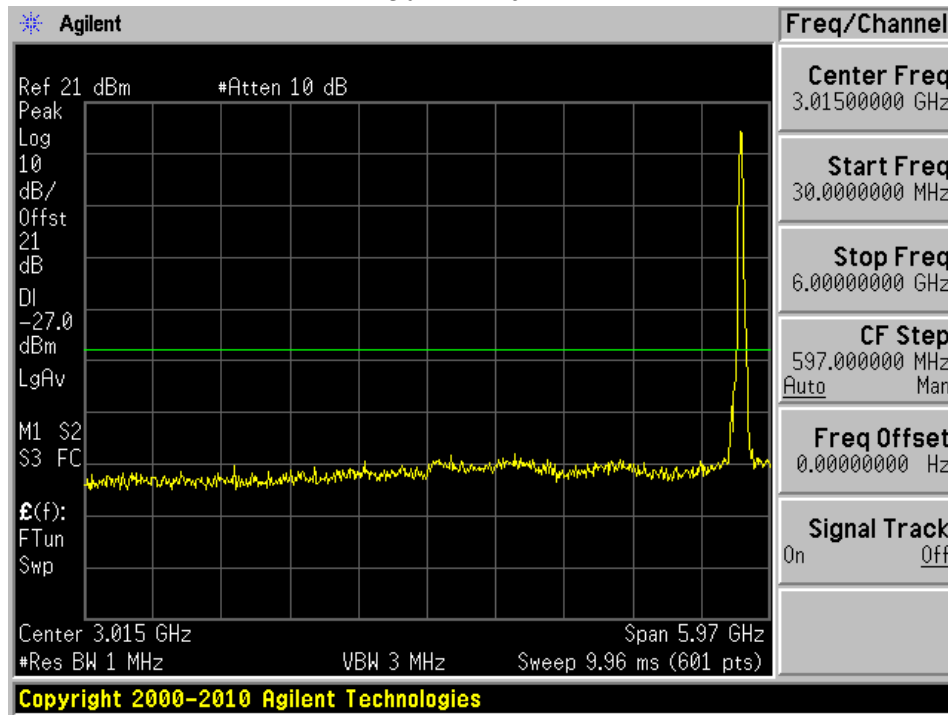


Low Channel A

6GHz – 40GHz

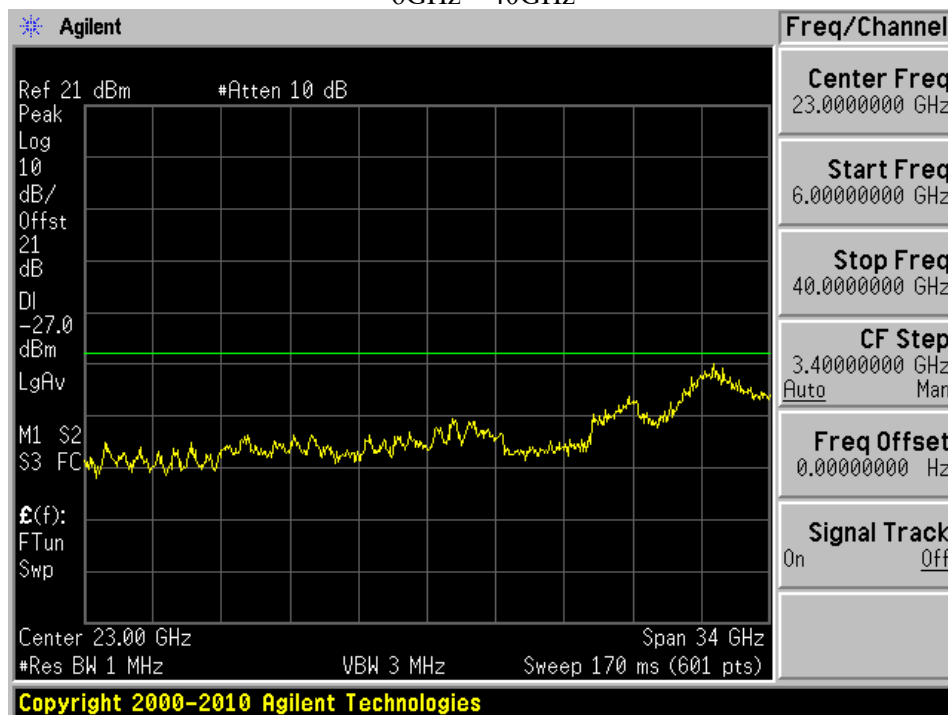


Mid Channel

30MHz – 6GHz

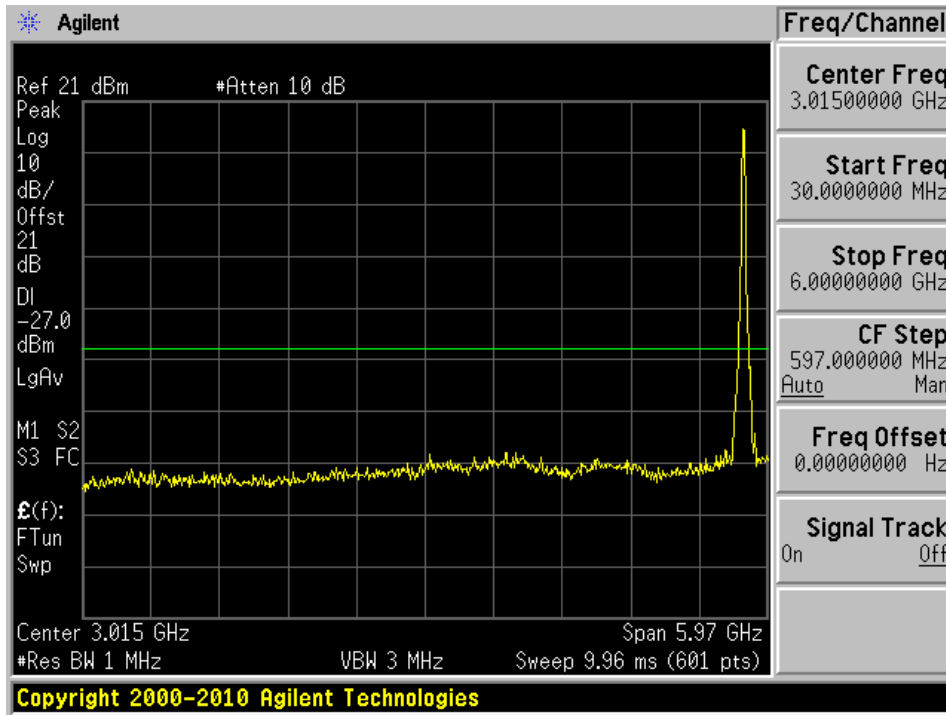


Mid Channel

6GHz – 40GHz

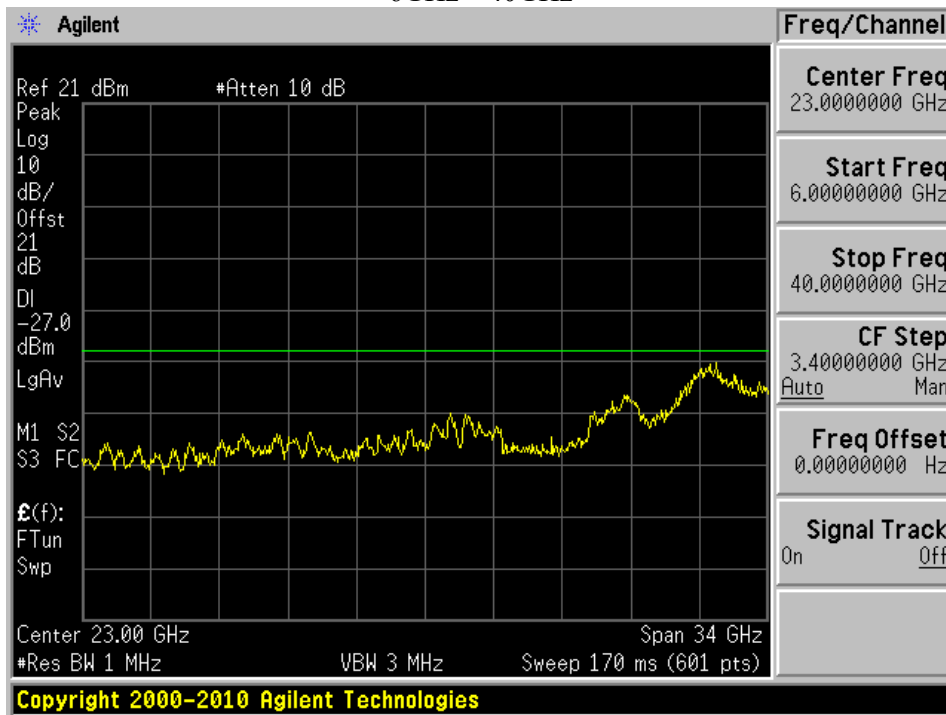


High Channel

30MHz – 6GHz

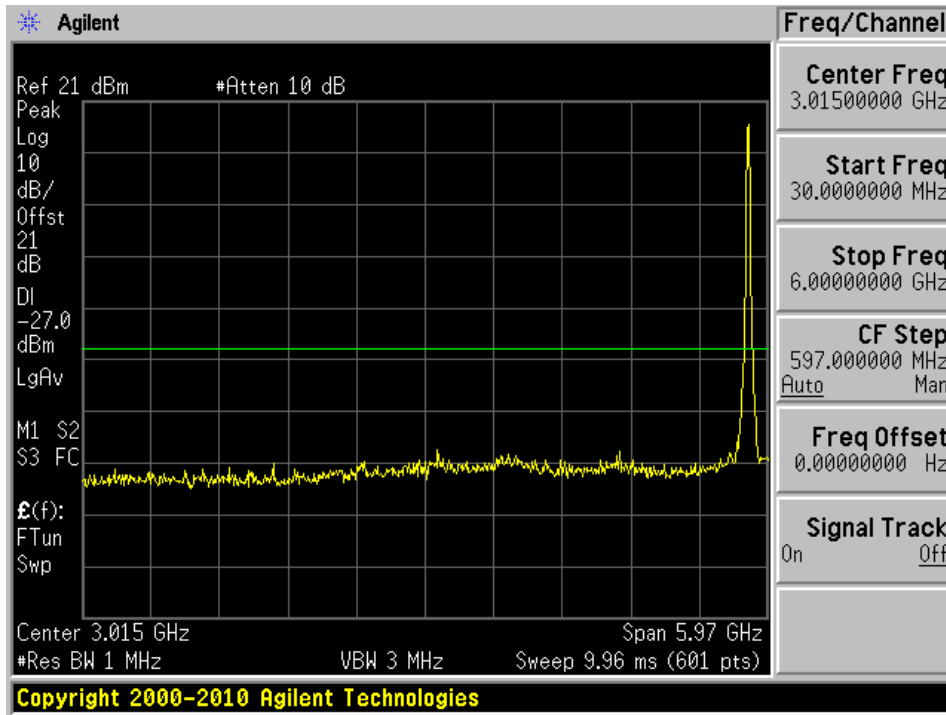

High Channel


6GHz – 40GHz

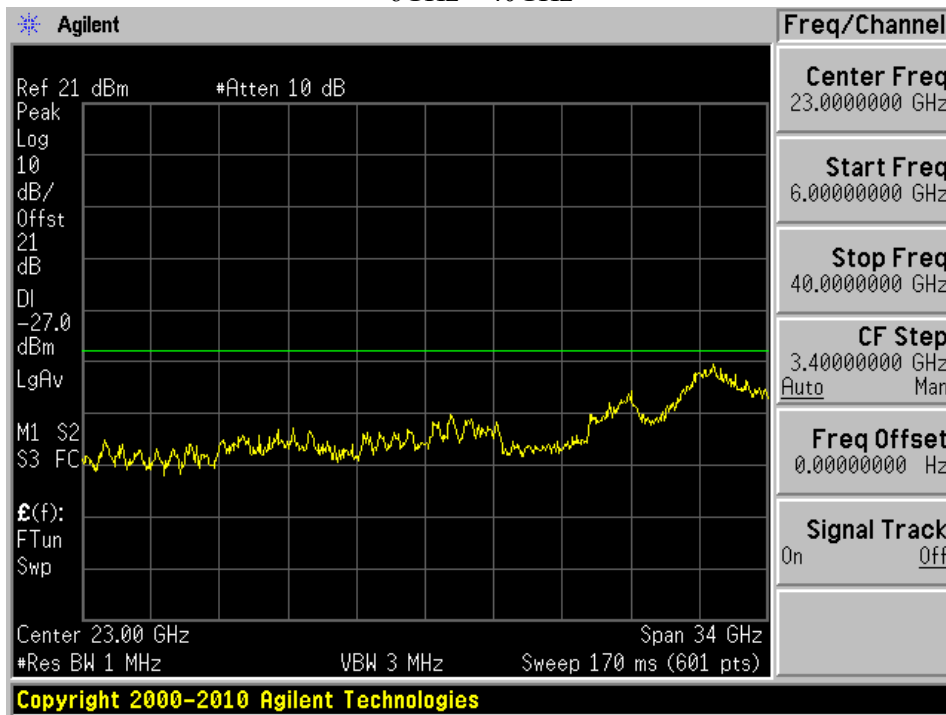

5725 - 5850 MHz 802.11n20

Low Channel

30MHz – 6GHz

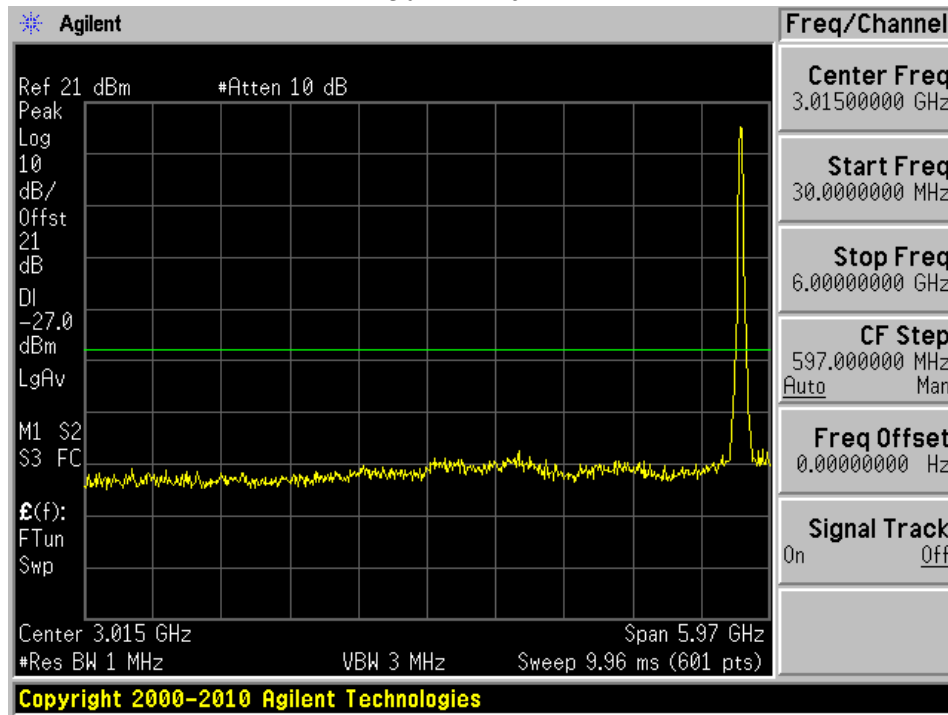


Low Channel

6GHz – 40GHz




Mid Channel

30MHz -6GHz

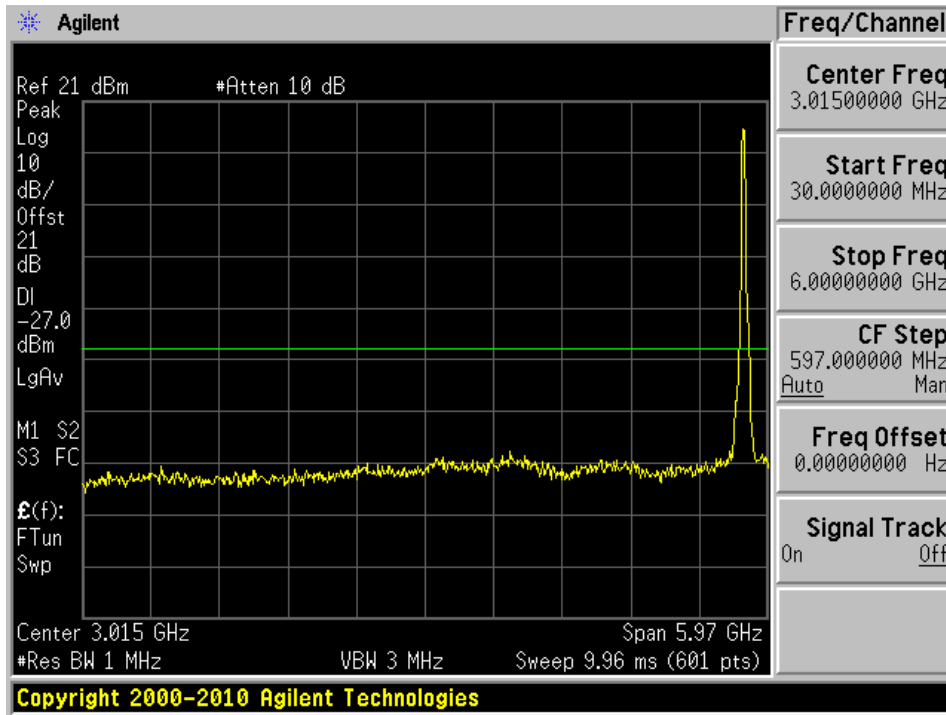


Mid Channel

6GHz - 40GHz

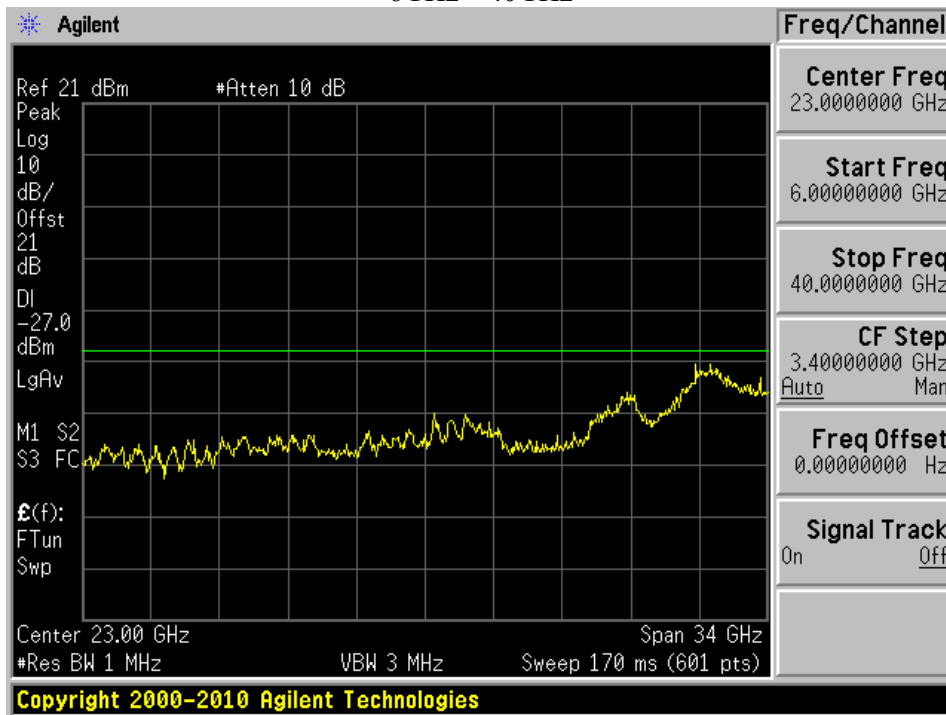


High Channel

30MHz - 6GHz

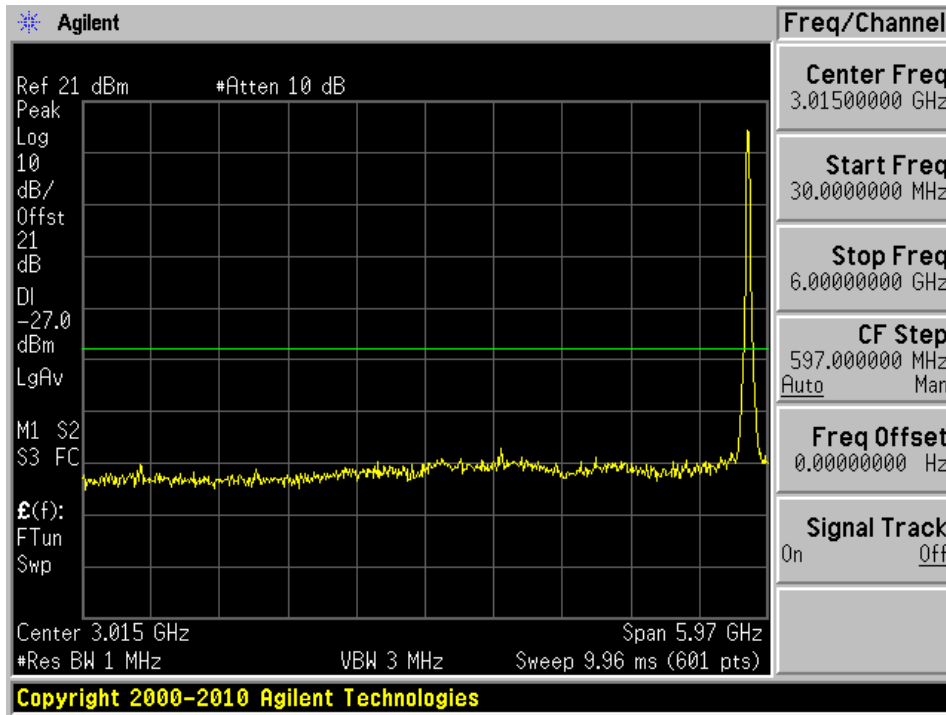

High Channel


6GHz - 40GHz

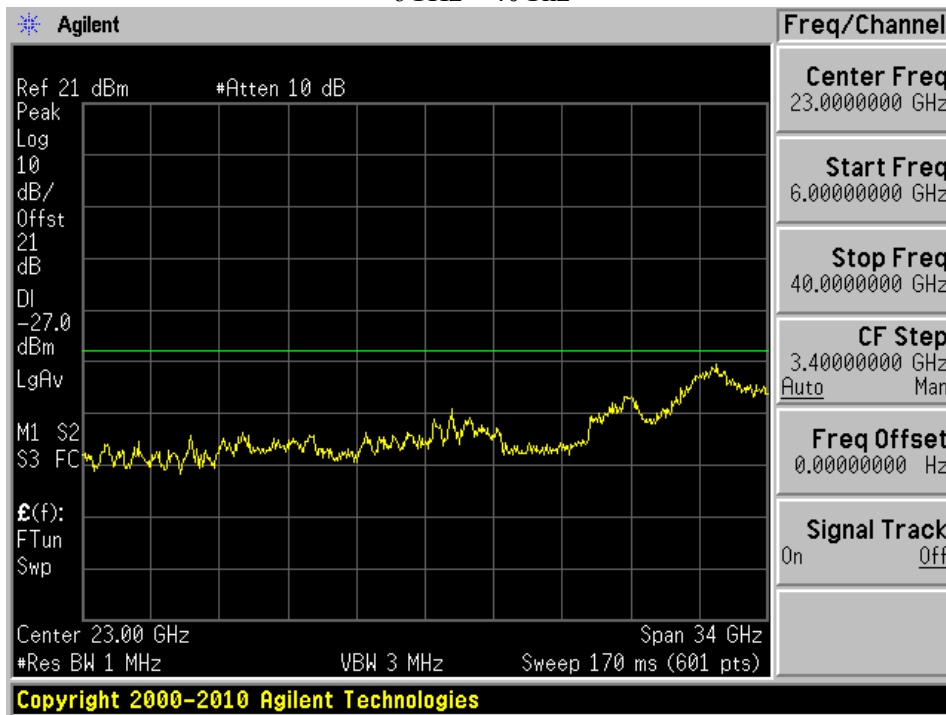

5725 - 5850 MHz 802.11n40

Low Channel

30MHz - 6GHz

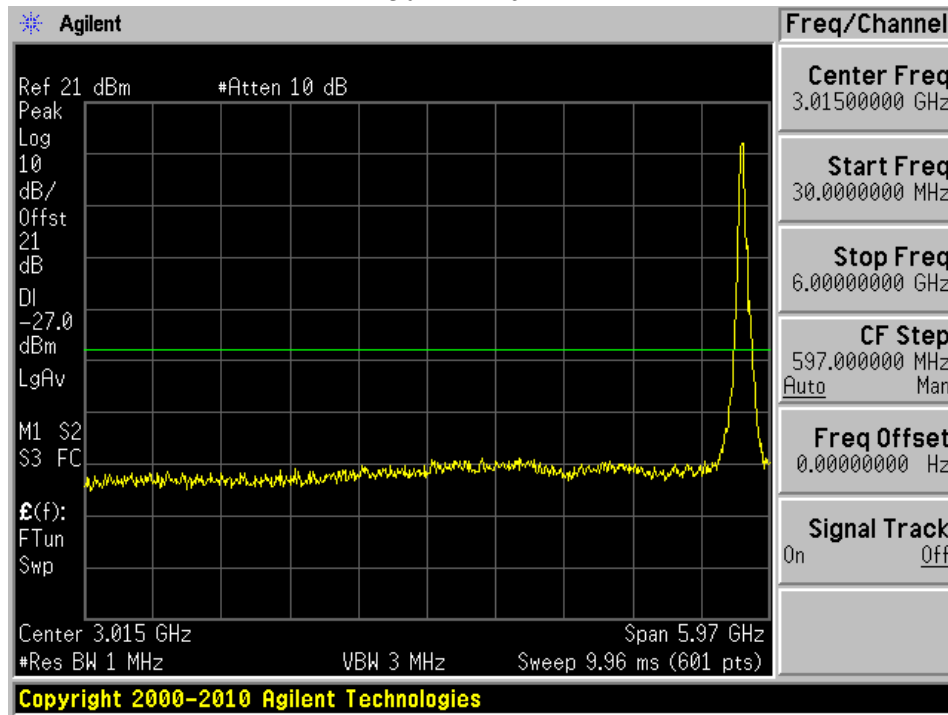


Low Channel

6GHz - 40GHz




Mid Channel

30MHz – 6GHz

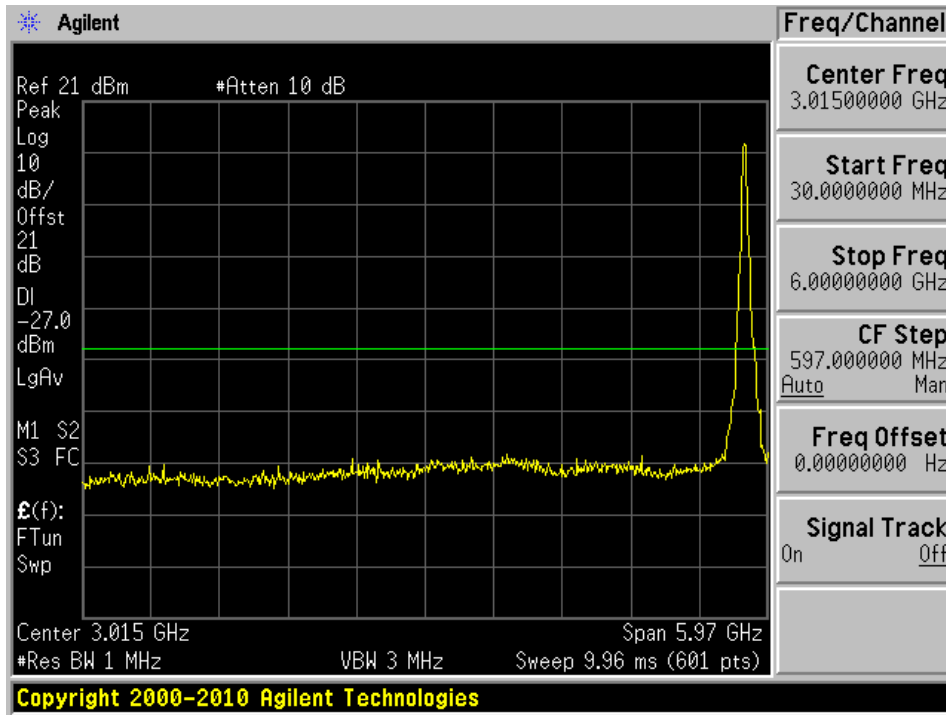


Mid Channel

6GHz – 40GHz

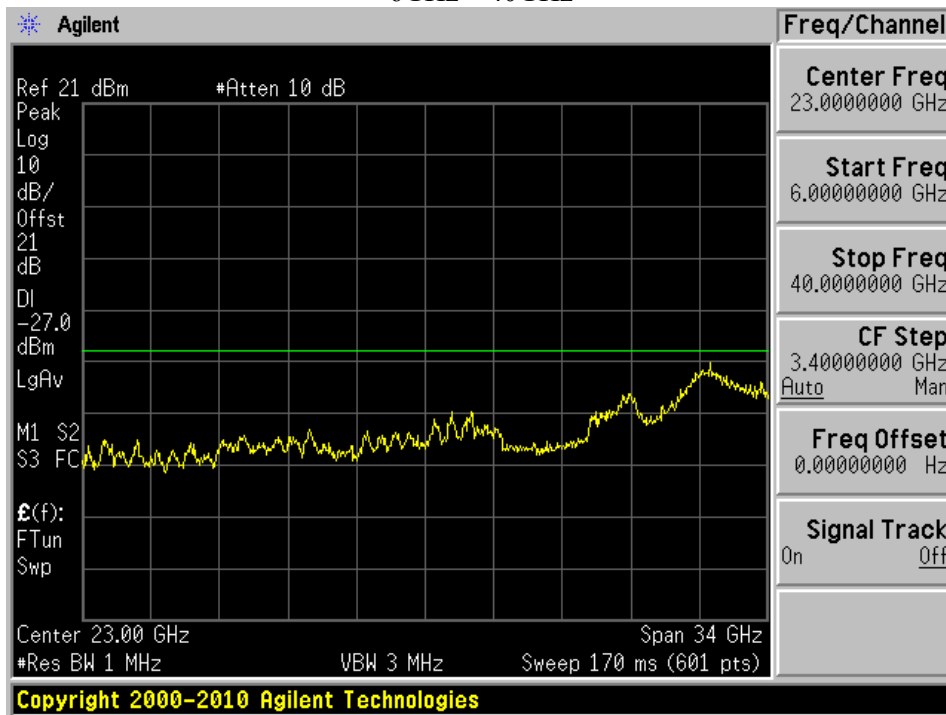


5725 - 5850 MHz 802.11ac80

Low Channel
30MHz – 6GHz

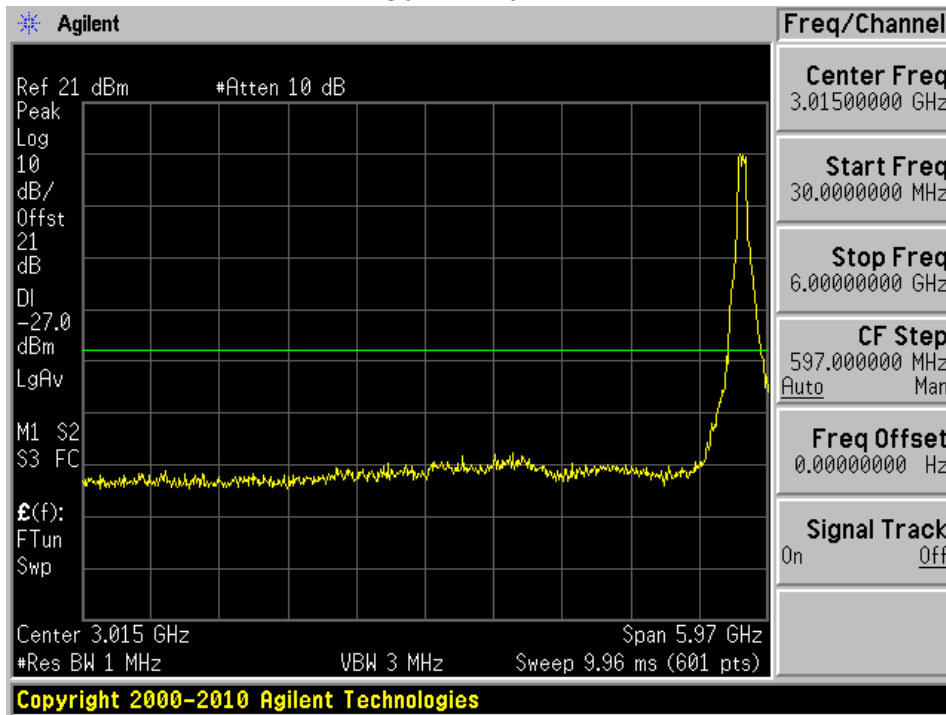

Low Channel
6GHz – 40GHz

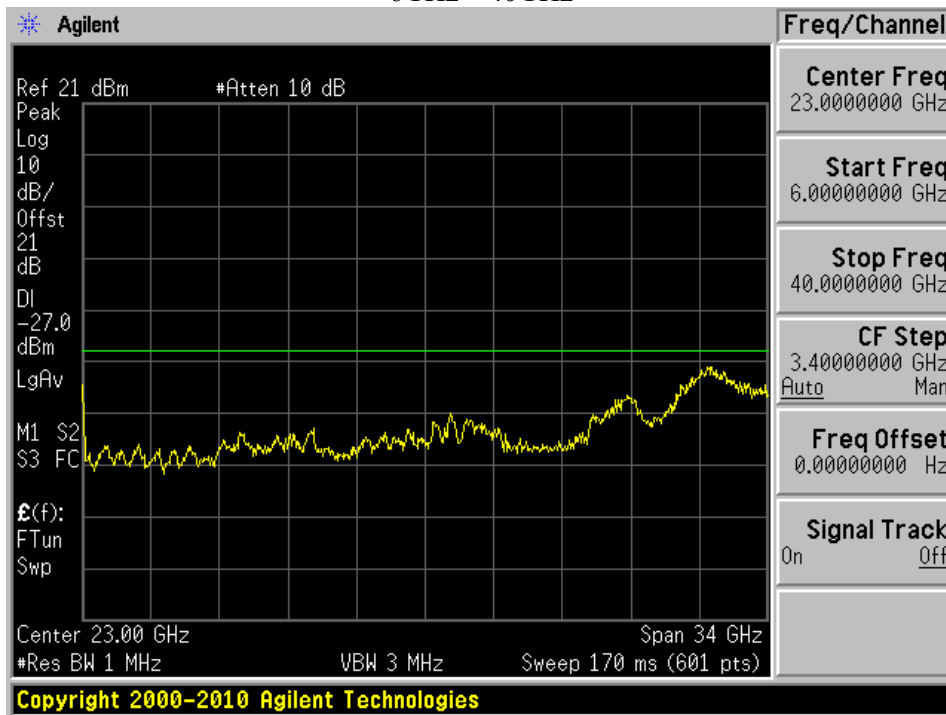

Note: Antenna Gain is considered into offset.

12 FCC §15.407(h) & ISEDC RSS-247 §6.3 – Dynamic Frequency Selection

12.1 Applicable Standards

FCC CFR47 §15.407 (h), RSS-247 Issue 2 and KDB: 905462 D02 UNII DFS Compliance Procedures New Rules v02.

Table 1: Applicability of DFS requirements prior to use of a channel

Requirement	Operational Mode		
	Master	Client (Without radar detection)	Client (With radar detection)
Non-Occupancy Period	Yes	Not Required	Yes
DFS Detection Threshold	Yes	Not Required	Yes
Channel Availability Check Time	Yes	Not Required	Not Required
U-NII Detection Bandwidth	Yes	Not Required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode	
	Master Device or Client with Radar Detection	Client Without Radar Detection
DFS Detection Threshold	Yes	Not Required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not Required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required
Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.		

Table 3: Interference Threshold for Master and Client with Radar Detection

Maximum Transmit Power	Value (See Notes 1, 2 and 3)
EIRP \geq 200 milliwatt	-64 dBm
EIRP $<$ 200 milliwatt and power spectral density $<$ 10dBm/MHz	-62 dBm
EIRP $<$ 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
<p>Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.</p> <p>Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.</p> <p>Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.</p>	

Table 4: DFS Response Requirement Values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds <i>See Note 1.</i>
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. <i>See Notes 1 and 2.</i>
U-NII Detection Bandwidth	Minimum 100% of the UNII 99% transmission power bandwidth. <i>See Note 3.</i>
<p>Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.</p> <p>Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.</p> <p>Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.</p>	

Table 5: Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (Microseconds)	PRI (Microseconds)	Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	$\text{Roundup} \left(\frac{1}{360} \right)$ $\left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right)$	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec , with a minimum increment of 1 μsec , excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
<p>Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.</p>					

Table 6: Long Pulse Radar Test Signal

Radar Type	Bursts	Chirp Width (MHz)	PRI (usec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30


Table 7: Frequency Hopping Radar Test Signal

Radar Type	Pulse Width (usec)	PRI (usec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30


12.2 DFS Measurement System

BACL DFS measurement system consists of two subsystems: (1) The radar signal generating subsystem and (2) the traffic monitoring subsystem.

12.3 System Block Diagram

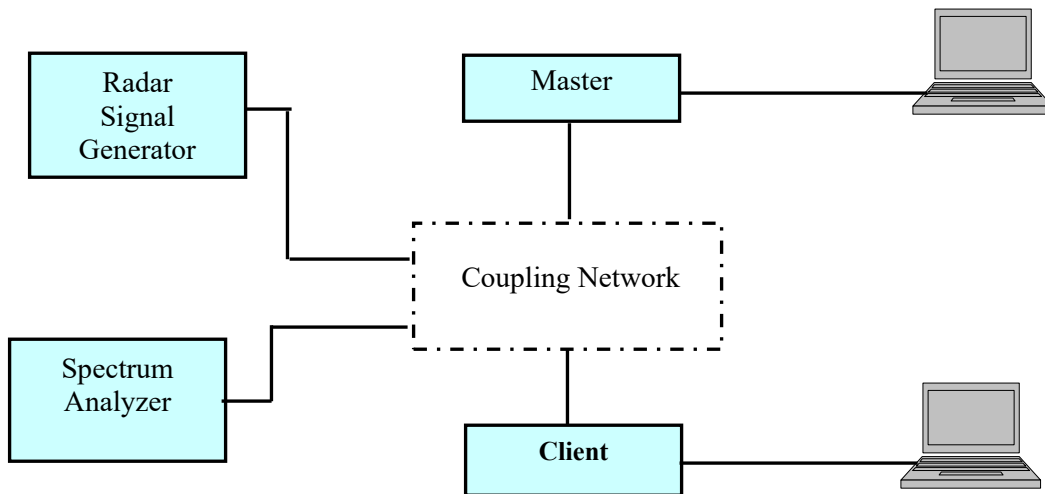

12.4 Radiated Method

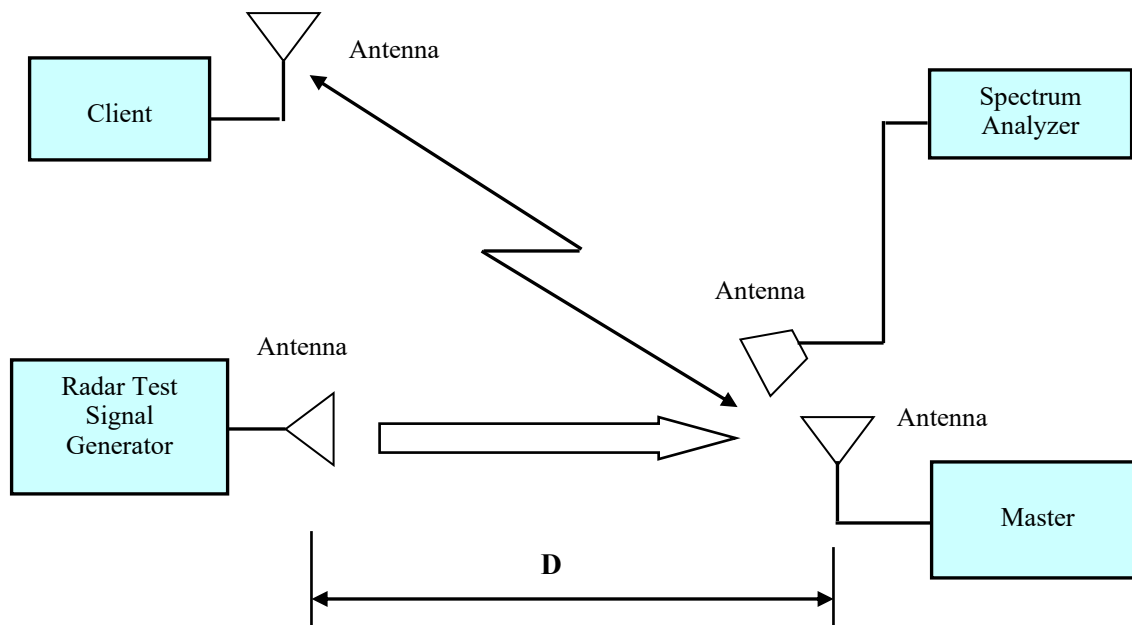

12.5 Test Procedure

The EUT was connected to a certified master device (FCC ID: S9GH350, IC: 5912A-H350). A spectrum analyzer was used as a monitor that verifies the EUT's status, which includes the Channel Closing Transmission Time and the Channel Move Time.

BACL use type 0 radar signal to test the channel move time and channel closing transmission time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time = N * Dwell Time

N is the number of spectrum analyzer bins showing a device transmission

Dwell Time is the dwell time per bin (i.e. Dwell Time = S/B, S is the sweep time and B is the number of bin, i.e. 8192)

12.6 Test Equipment List and Details

Bacl No.	Manufacturer	Equipment Description	Model	S/N	Calibration Date	Calibration Interval
547	National Instruments	NI PXI-1042 8-Slot chassis	PXI-1042	V08X01EE1	N/A	N/A
-	National Instruments	Arbitrary Waveform Generator	PXI-5421	N/A	N/A	N/A
-	National Instruments	RF Upconverter	PXI-5610	N/A	N/A	N/A
-	ASCOR	Upconverter	AS-7206	N/A	N/A	N/A
424	Agilent	Analyzer, Spectrum	E4440A	US45303156	2021-12-06	1 year
187	A.R.A	Horn Antenna	DRG-118/A	1132	2022-03-17	2 years
473	EMCO	Horn Antenna	3115	9511-4627	2020-10-12	2 years
-	-	RF Cable	-	-	Each Time	Each Time

Note¹: cable and attenuator included in the test set-up will be checked each time before testing.

Statement of Traceability: BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 "A2LA Policy on Metrological Traceability".

12.7 Test Environmental Conditions

Temperature:	22° C
Relative Humidity:	43 %
ATM Pressure:	101.9 kPa


Testing was performed by Simon Ma on 2022-08-04 at the DFS testing site.

12.8 Test Results


Plots of Radar Waveforms

Radar Type 0

5290 MHz

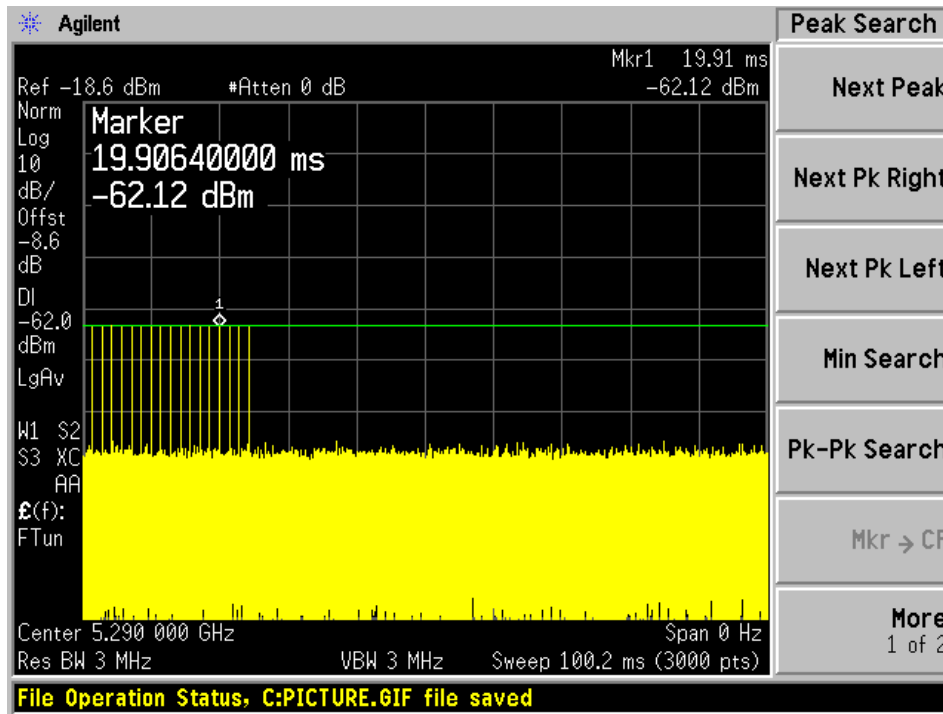


5500 MHz

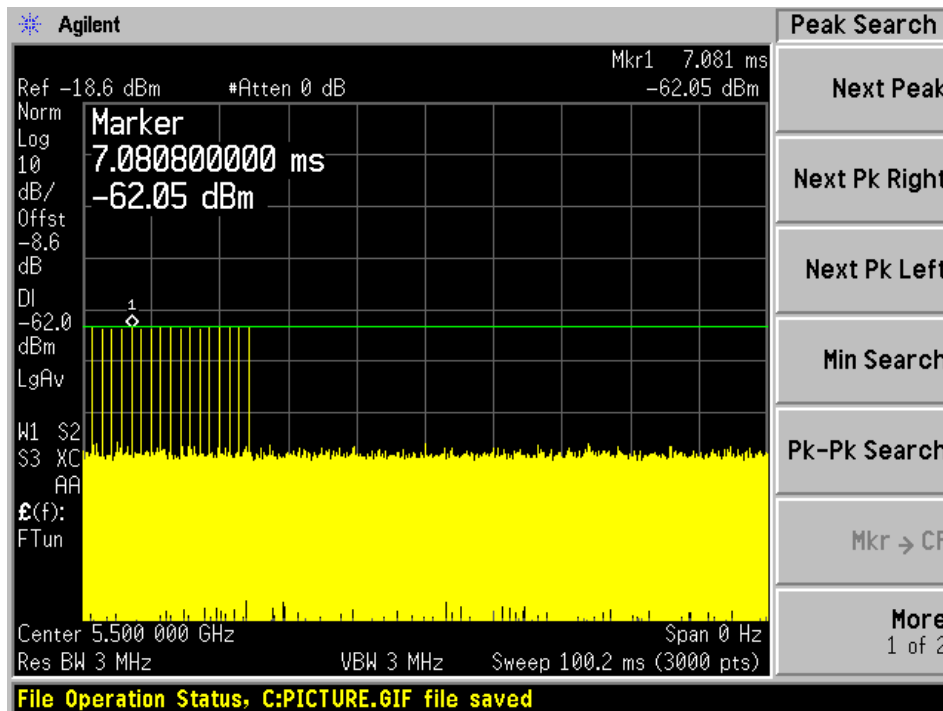

Frequency (MHz)	Bandwidth (MHz)	Radar Type	Results
5320	20	Type 0	Compliant
5290	80	Type 0	Compliant
5500	20	Type 0	Compliant
5530	80	Type 0	Compliant

5320 MHz 20 MHz Bandwidth

Type 0 radar channel move time less than 10s result:

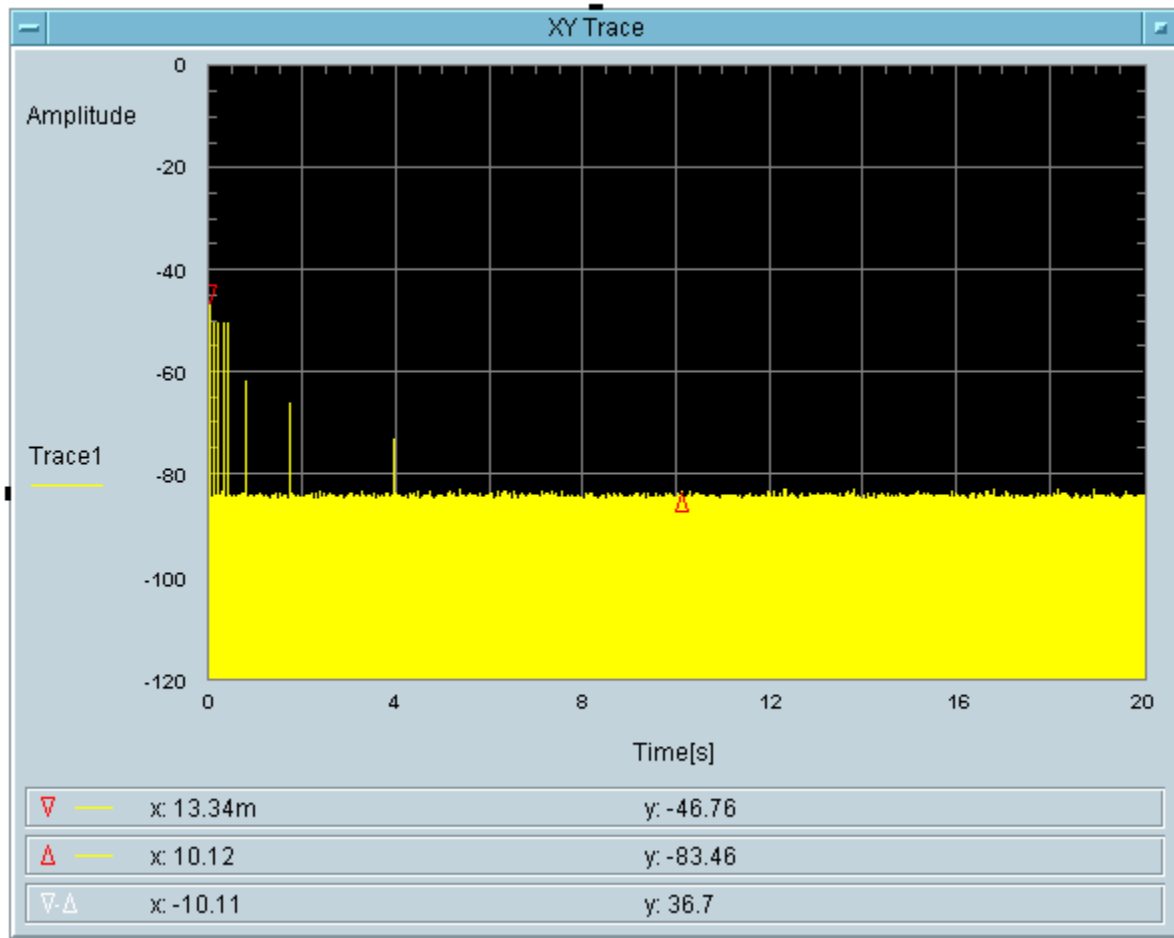

Type 0 radar channel closing transmission time result:


Channel closing transmitting time (ms)	Limit (ms)	Result
60+33.33	200	Pass

Total On Time [s]
60m

Total On Time After Delay [s]
33.33m

5290 MHz 80 MHz Bandwidth

Type 0 radar channel move time less than 10s result:

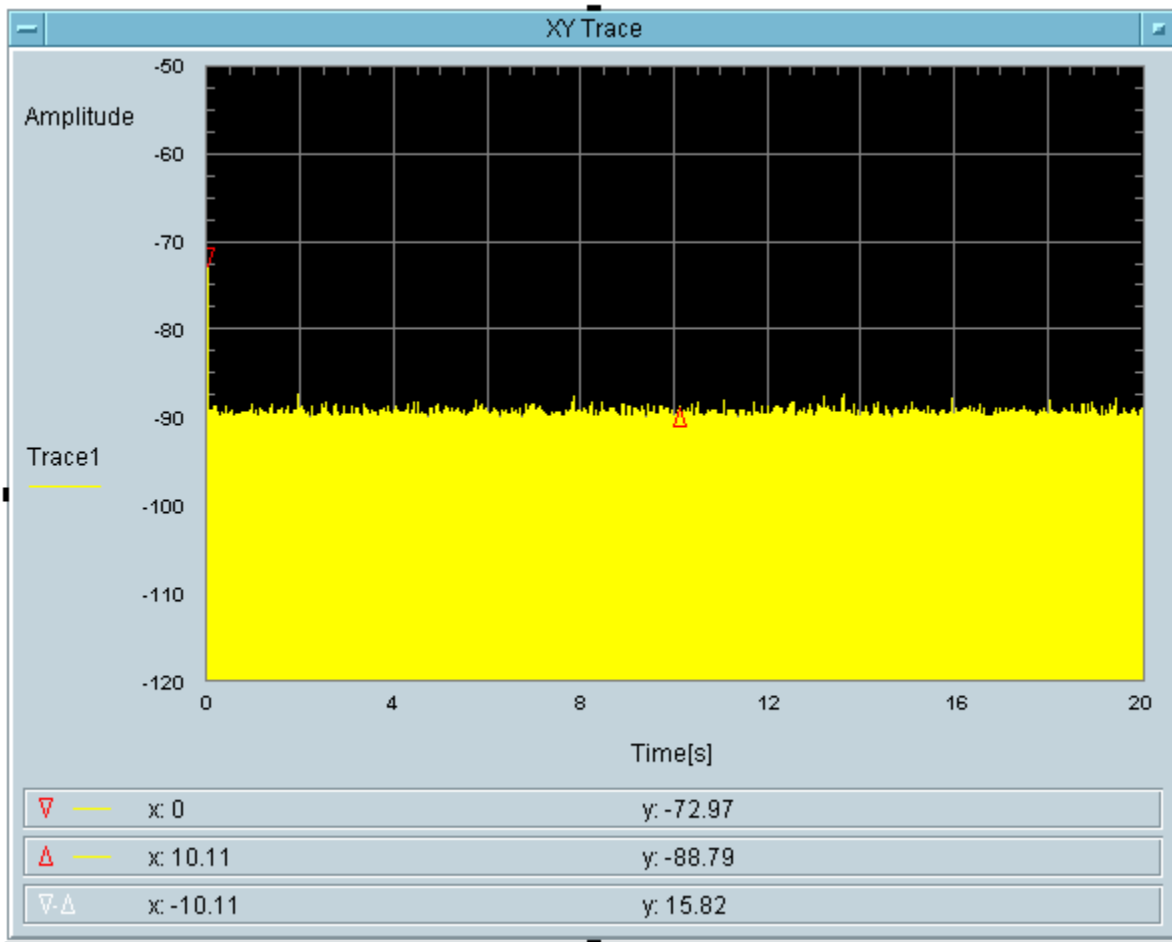

Type 0 radar channel closing transmission time result:


Channel closing transmitting time (ms)	Limit (ms)	Result
6.667+0	200	Pass

Total On Time [s]
6.667m

Total On Time After Delay [s]

5500 MHz 20 MHz Bandwidth

Type 0 radar channel move time less than 10s result:

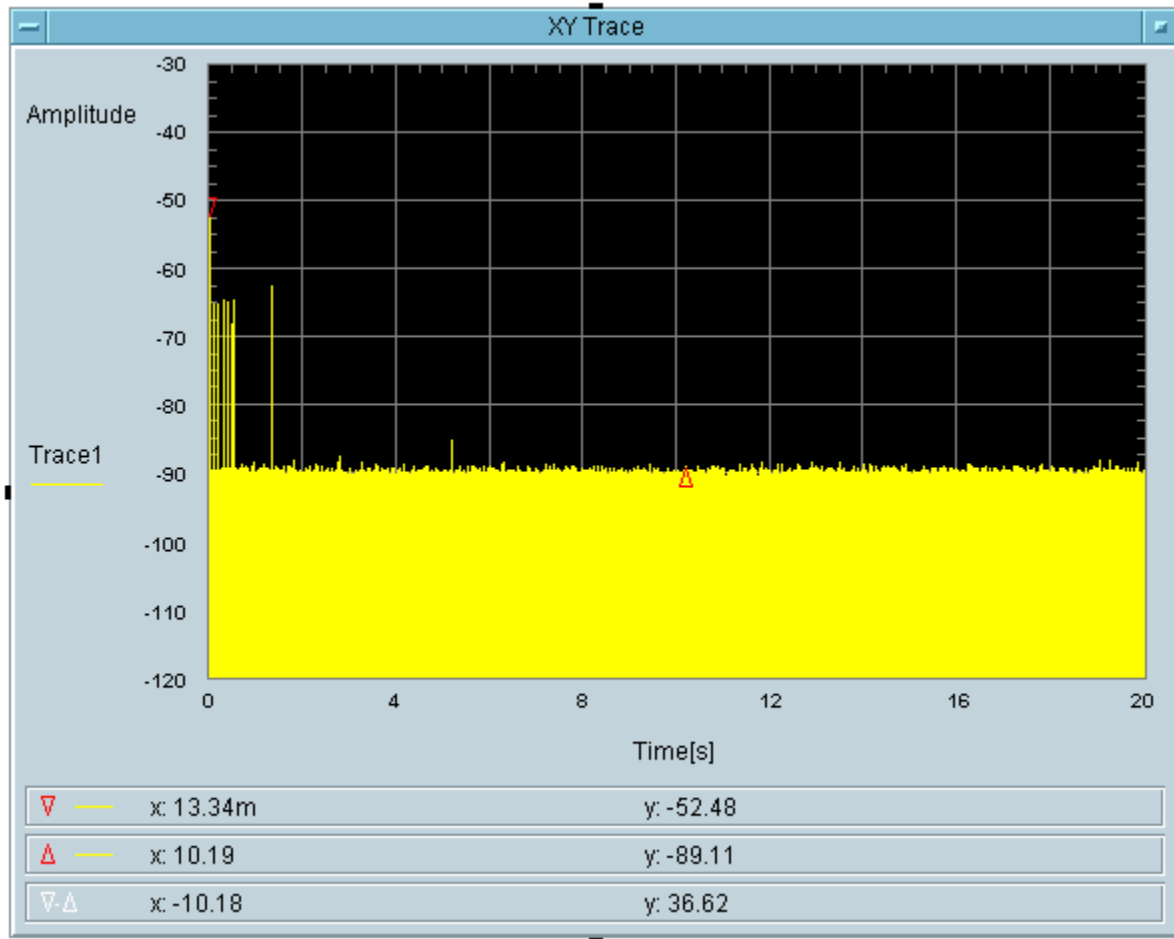

Type 0 radar channel closing transmission time result:


Channel closing transmitting time (ms)	Limit (ms)	Result
60+33.33	200	Pass

Total On Time [s]
60m

Total On Time After Delay [s]
33.33m

5530 MHz 80 MHz Bandwidth

Type 0 radar channel move time less than 10s result:

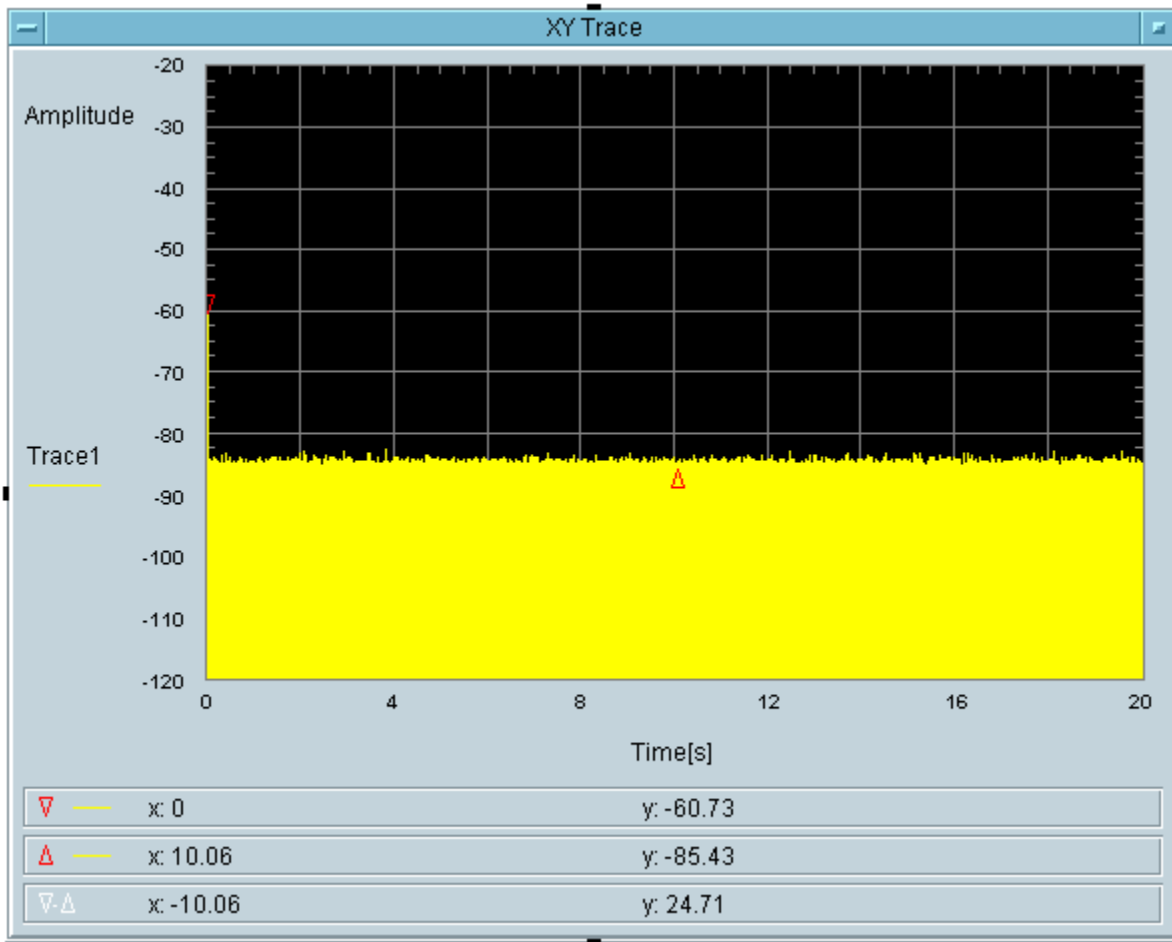

Type 0 radar channel closing transmission time result:


Channel closing transmitting time (ms)	Limit (ms)	Result
6.667+0	200	Pass

Total On Time [s]
6.667m


Total On Time After Delay [s]

Non-occupancy Time

5290 MHz

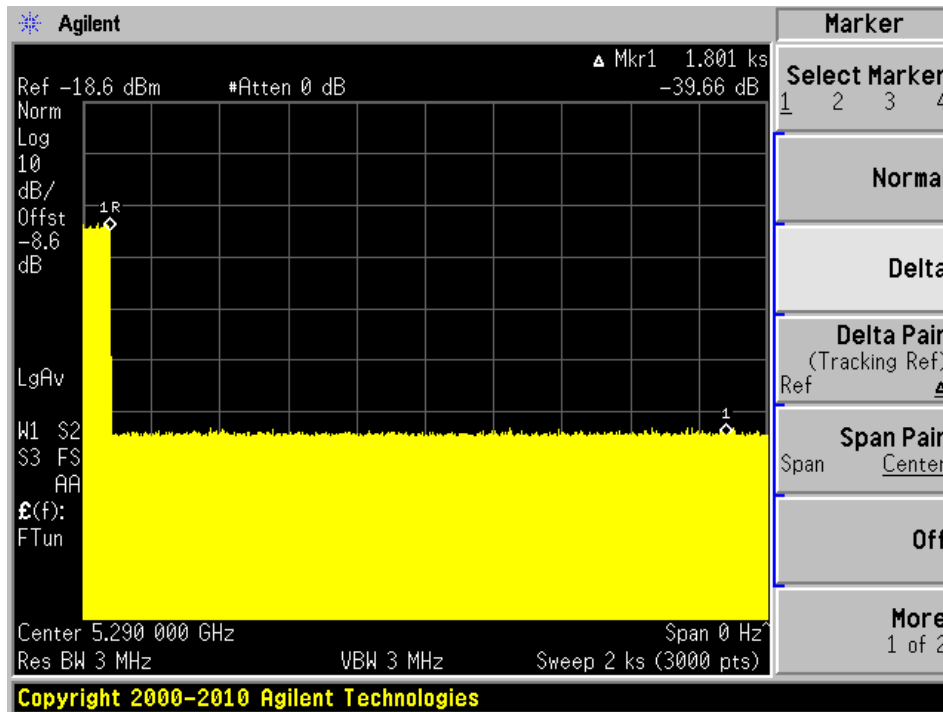

5530 MHz

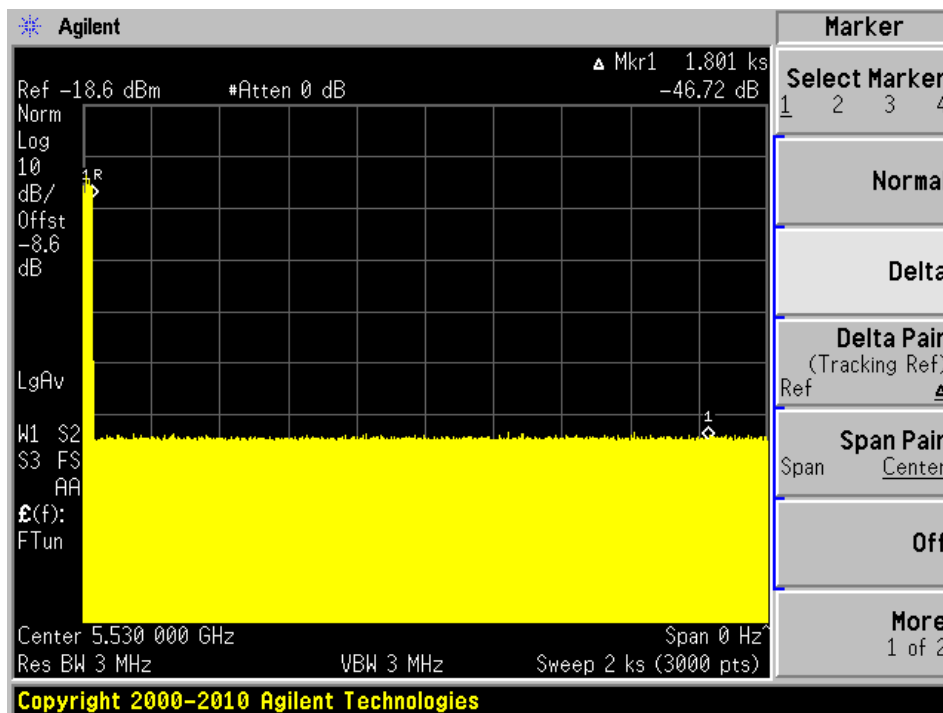

13 Annex A (Normative) – EUT Test Setup Photographs

Please refer to the attachment.

14 Annex B (Normative) – EUT External Photographs

Please refer to the attachment.

15 Annex C (Normative) – EUT Internal Photographs

Please refer to the attachment.

16 Annex D (Normative) - A2LA Electrical Testing Certificate



Accredited Laboratory

A2LA has accredited

BAY AREA COMPLIANCE LABORATORIES CORP.

Sunnyvale, CA

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 *General requirements for the competence of testing and calibration laboratories*. This laboratory also meets A2LA R222 - *Specific Requirements EPA ENERGY STAR Accreditation Program*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 10th day of March 2021.

Trace McInturf, Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 3297.02
Valid to September 30, 2022

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

Please follow the web link below for a full ISO 17025 scope

<https://www.a2la.org/scopepdf/3297-02.pdf>

--- END OF REPORT ---