



America

---

**Choose certainty.  
Add value.**

## Report On

Application for Grant of Equipment Authorization of the  
SMK Electronics Corp.

RC03 RF Remote Control (with TDK antenna)

FCC Part 15 Subpart C §15.247

IC RSS-Gen and RSS-210 Issue 8 December 2010

**Report No. SC1304645B**

**May 2013**



**REPORT ON** Radio Testing of the  
SMK Electronics Corp.  
RF Remote Control (with TDK antenna)

**TEST REPORT NUMBER** SC1304645B

**PREPARED FOR** SMK Electronics Corp.  
1055 Tierra Del Rey, Suite H  
Chula Vista, CA 91910

**CONTACT PERSON** Nikolay Shtin  
RF Engineer  
(619) 216-6400  
nshtin@smkusa.com

**PREPARED BY**

  
Ferdinand S. Custodio

**Name**  
Authorized Signatory  
Title: EMC/Wireless Test Engineer

**APPROVED BY**



Chip R. Fleury  
**Name**  
Authorized Signatory

**DATED**

May 20, 2013



**Revision History**

SC1304645B SMK Electronics Corp. RC03 RF Remote Control (with TDK antenna)					
DATE	OLD REVISION	NEW REVISION	REASON	PAGES AFFECTED	APPROVED BY
05/20/13	Initial Release				Ferdinand Custodio



## CONTENTS

Section	Page No
<b>1</b>	<b>REPORT SUMMARY ..... 5</b>
1.1	Introduction ..... 6
1.2	Brief Summary Of Results ..... 7
1.3	Product Information ..... 8
1.4	EUT Test Configuration ..... 10
1.5	Deviations From The Standard ..... 11
1.6	Modification Record ..... 11
1.7	Test Methodology ..... 11
1.8	Test Facility ..... 11
<b>2</b>	<b>TEST DETAILS ..... 12</b>
2.1	Peak Output Power ..... 13
2.2	Conducted Emissions ..... 16
2.3	99% Emission Bandwidth ..... 17
2.4	Minimum 6 dB RF Bandwidth ..... 23
2.5	Out-Of-Band Emissions - Conducted ..... 29
2.6	Band-Edge Compliance Of RFConducted Emissions ..... 35
2.7	Spurious Radiated Emissions ..... 39
2.8	Power Spectral Density ..... 63
<b>3</b>	<b>TEST EQUIPMENT USED ..... 69</b>
3.1	Test Equipment Used ..... 70
3.2	Measurement Uncertainty ..... 71
<b>4</b>	<b>DIAGRAM OF TEST SETUP ..... 72</b>
4.1	Test Setup Diagram ..... 73
<b>5</b>	<b>ACCREDITATION, DISCLAIMERS AND COPYRIGHT ..... 75</b>
5.1	Accreditation, Disclaimers and Copyright ..... 76



## **SECTION 1**

### **REPORT SUMMARY**

Radio Testing of the  
SMK Electronics Corp.  
RF Remote Control (with TDK antenna)



## 1.1 INTRODUCTION

The information contained in this report is intended to show verification of the SMK Electronics Corp. RF Remote Control (with TDK antenna) to the requirements of FCC Part 15 Subpart C §15.247 and IC RSS-Gen and RSS-210 Issue 8 December 2010.

Objective	To perform Radio Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	SMK Electronics Corp.
Model Number(s)	RC03
FCC ID Number	TC2-RCB3
IC Number	5959A-RCB3
Serial Number(s)	N/A
Number of Samples Tested	1
Test Specification/Issue/Date	<ul style="list-style-type: none"><li>• FCC Part 15 Subpart C §15.247 (October 1, 2011).</li><li>• RSS-210 - Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment (Issue 8, December 2010).</li><li>• RSS-Gen - General Requirements and Information for the Certification of Radio Apparatus (Issue 3, December 2010).</li></ul>
Start of Test	May 09, 2013
Finish of Test	May 20, 2013
Name of Engineer(s)	Ferdinand S. Custodio Juan Manuel Gonzalez Lan Sayasane
Related Document(s)	<ul style="list-style-type: none"><li>• KDB 558074 Revision to Compliance Measurement guidance for 15.247 Digital Transmission Systems (April 24, 2012).</li><li>• 558074 D01 DTS Meas Guidance v01 (Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247, January 18, 2012)</li><li>• ANSI C63.10-2009 (American National Standard for Testing Unlicensed Wireless Devices.</li><li>• Supporting documents for EUT certification are separate exhibits.</li></ul>



## 1.2 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out in accordance with FCC Part 15 Subpart C §15.247 with cross-reference to the corresponding IC RSS standard is shown below.

Section	§15.247 Spec Clause	RSS	Test Description	Result	Comments/ Base Standard
2.1	§15.247(b)(3)	RSS-210 A8.4 (4)	Peak Output Power	Compliant**	
2.2	§15.207(a)	RSS-Gen 7.2.4	Conducted Emissions	N/A*	
2.3		RSS-Gen 4.6.1	99% Emission Bandwidth	Compliant**	
2.4	§15.247(a)(2)	RSS-210 A8.2(a)	Minimum 6 dB RF Bandwidth	Compliant**	
2.5	§15.247(d)	RSS-210 A8.5	Out-of-Band Emissions - Conducted	Compliant**	
2.6	§15.247(d)	RSS-210 A8.5	Band-edge Compliance of RF Conducted Emissions	Compliant	
2.7	§15.247(d)	RSS-210 A8.5	Spurious Radiated Emissions	Compliant	
2.7		RSS-Gen 4.10	Receiver Spurious Emissions	Compliant	
2.8	§15.247(e)	RSS-210 A8.2(b)	Power Spectral Density for Digitally Modulated Device	Compliant**	

\* Not applicable. EUT is battery powered.

\*\* The data in this report for all conducted measurements were taken from report SC1208772 Rev 1. There were no changes to the conducted port measurements as the chip set and PCB layout were identical for this section. The only significant change was the addition of a new chip antenna and the addition of an audio port.



**1.3 PRODUCT INFORMATION**

**1.3.1 Technical Description**

The Equipment Under Test (EUT) was a SMK Electronics Corp. RF Remote Control (with TDK antenna). The EUT is a remote control for the Roku streaming player. The EUT operates using WLAN channels in the 2.4GHz and 5.0 GHz bands.

**1.3.2 EUT General Description**

EUT Description RF Remote CoRF Remote Control (with TDK antenna)  
 Model Number(s) RC03  
 Rated Voltage 3.0VDC from 2 (two) AA alkaline batteries.

Output Power	Mode	Average (conducted)	Peak (conducted)
	802.11 b	-2.3 dBm	7.48 dBm
	802.11 g	-7.6 dBm	7.41 dBm
	802.11 a	-11.05 dBm	5.6 dBm

Frequency Range 2412 MHz to 2462 MHz in the 2400 MHz to 2483.5 MHz Band  
 5745 MHz to 5825 MHz in the 5725 MHz to 5850 MHz Band

Number of Operating Frequencies 11 (802.11 b/g)  
 4 (802.11 a)

Channels Verified (802.11 b/g) Channel 1 (Low Channel 2412 MHz)  
 Channel 6(Mid Channel 2437 MHz)  
 Channel 11 (High Channel 2462 MHz)

Channels Verified (802.11 a) Channel 149 (Low Channel 5745 MHz)  
 Channel 153(Mid Channel 5765 MHz)  
 Channel 161 (High Channel 5805 MHz)

Modulation Used DSSS (802.11 b), OFDM/DSSS (802.11 g), OFDM (802.11 a)

**1.3.3 Antenna Details**

Model ANT016008LCD244MA1  
 Manufacturer TDK  
 Antenna Type Compact Dual-Band Chip Antenna



Antenna Gain (802.11 b/g)	2.27 dBi
Antenna Gain (802.11 a)	5.18 dBi
EUT Antenna Connector	N/A (small SMD chip antenna).

## 1.4 EUT TEST CONFIGURATION

### 1.4.1 Test Configuration Description

Test Configurations	Description
A	Antenna port conducted measurement. Manufacturer provided a SMA test port for conducted measurements. Power setting set to "SPW 1". (Originally measured in report SC1208772 and copied into this report)
B	Radiated emissions test configuration. EUT configured to transmit on either antenna #1 or antenna#2. Power setting set to "SPW 1".

### 1.4.2 EUT Exercise Software

Client provided a programming software (AT\_Cont131.exe) using Prolific USB-to-Serial adapter. The software allows the following channels: 1-14, 36,40,44,48,149,153,157 and 161. The following data rates were used: 1, 2, 5.5,11,6,9,12,18 and 24 Mbps.

### 1.4.3 Support Equipment and I/O cables

Manufacturer	Equipment/Cable	Description
Ozmo	Debug Jig (USB-to-Serial programmer)	Interface to program EUT (Channel, Data Rate, Power and Antenna). Not part of the test setup, removed during radiated emissions test.


*Laptop used during programming is generic and can be different brand and model.*

### 1.4.4 Worst Case Configuration

Worst-case configuration used in this test report based from Peak Output Power measurements:

Mode	Channel	Data Rate
802.11b	11 (High Channel)	1Mbps
802.11g	11 (High Channel)	6Mbps
802.11a	149 (Low Channel)	6Mbps

EUT is a portable device. For radiated measurements X, Y and Z orientations were verified. Worst case position is "Y".

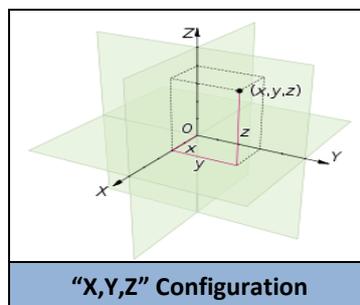



**1.5 DEVIATIONS FROM THE STANDARD**

No deviations from the applicable test standards or test plan were made during testing.

**1.6 MODIFICATION RECORD**

Description of Modification	Modification Fitted By	Date Modification Fitted
Serial Number N/A		
N/A		

The table above details modifications made to the EUT during the test programme. The modifications incorporated during each test (if relevant) are recorded on the appropriate test pages.

**1.7 TEST METHODOLOGY**

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

For conducted and radiated emissions the equipment under test (EUT) was configured to measure its highest possible emission level. This level was based on the maximized cable configuration from exploratory testing per ANSI C63.4-2009. The test modes were adapted according to the Operating Instructions provided by the manufacturer/client.

**1.8 TEST FACILITY**

**1.8.1 FCC – Registration No.: US5296**

TUV SUD America Inc. (San Diego), is an accredited test facility with the site description report on file and has met all the requirements specified in §2.498 of the FCC rules. The acceptance letter from the FCC is maintained in our files and the Registration is US5296.

**1.8.2 Industry Canada (IC) Registration No.: 3067A**

The 10m Semi-anechoic chamber of TUV SUD America Inc. (San Diego) has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No. 3067A.



## **SECTION 2**

### **TEST DETAILS**

Radio Testing of the  
SMK Electronics Corp.  
RF Remote Control (with TDK antenna)



## **2.1 PEAK OUTPUT POWER**

### **2.1.1 Specification Reference**

Part 15 Subpart C §15.247(b)(3)

### **2.1.2 Standard Applicable**

(3) For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

### **2.1.3 Equipment Under Test and Modification State**

Serial No: N/A / Test Configuration A

### **2.1.4 Date of Test/Initial of test personnel who performed the test**

September 6, 2012/FSC

### **2.1.5 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.1.6 Environmental Conditions**

Ambient Temperature	23.2°C
Relative Humidity	50.5%
ATM Pressure	99.1 kPa

### **2.1.7 Additional Observations**

- This is a conducted test using Option 3: Peak Power Meter Method discussed under KDB 558074 (Revision to Compliance Measurement Guidance for 15.247 Digital Transmission Systems, April 24, 2012).
- All available modes and data rates were verified. The worst case data rate for each mode (marked bold and italic) will be verified for each test throughout this test report.

### **2.1.8 Test Results**

See attached table



802.11 b				
Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Peak Power (dBm)
<b>1</b>	<b>2412</b>	<b>1</b>	<b>-4.4</b>	<b>7.09</b>
<b>6</b>	<b>2437</b>	<b>1</b>	<b>-2.4</b>	<b>7.26</b>
<b>11</b>	<b>2462</b>	<b>1</b>	<b>-2.3</b>	<b>7.48</b>
1	2412	2	-4.4	7.06
6	2437	2	-4	7.3
11	2462	2	-3.7	7.46
1	2412	5.5	-5.5	7.07
6	2437	5.5	-5.2	7.3
11	2462	5.5	-5.1	7.47
1	2412	11	-6.7	7.15
6	2437	11	-6.4	7.34
11	2462	11	-6.3	7.4

802.11 g				
Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Peak Power (dBm)
<b>1</b>	<b>2412</b>	<b>6</b>	<b>-8.2</b>	<b>6.81</b>
<b>6</b>	<b>2437</b>	<b>6</b>	<b>-7.8</b>	<b>7.15</b>
<b>11</b>	<b>2462</b>	<b>6</b>	<b>-7.6</b>	<b>7.41</b>
1	2412	9	-9.5	6.51
6	2437	9	-9.2	6.81
11	2462	9	-9.1	7.2
1	2412	12	-10.7	6.47
6	2437	12	-10.3	6.96
11	2462	12	-10.1	7.08
1	2412	18	-11.9	6.52
6	2437	18	-11.6	6.86
11	2462	18	-11.3	7.13
1	2412	24	-12.9	6.62
6	2437	24	-12.6	6.94
11	2462	24	-12.4	6.99

802.11 a				
Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Peak Power (dBm)
<b>149</b>	<b>5745</b>	<b>6</b>	<b>-11.05</b>	<b>5.6</b>
<b>153</b>	<b>5765</b>	<b>6</b>	<b>-11.2</b>	<b>5.49</b>
<b>161</b>	<b>5805</b>	<b>6</b>	<b>-11.63</b>	<b>5.19</b>
149	5745	9	-12.4	5.17
153	5765	9	-12.6	4.73



America

161	5805	9	-13.02	4.5
149	5745	12	-13.5	4.93
153	5765	12	-13.68	4.81
161	5805	12	-14.1	4.52
149	5745	18	-14.8	5.19
153	5765	18	-15.01	4.78
161	5805	18	-15.4	4.81
149	5745	24	-15.89	5.11
153	5765	24	-16.1	5.26
161	5805	24	-16.45	4.73



**2.2 CONDUCTED EMISSIONS**

**2.2.1 Specification Reference**

Part 15 Subpart C §15.207(a)

**2.2.2 Standard Applicable**

An intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN).

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50

*\*Decreases with the logarithm of the frequency.*

**2.2.3 Equipment Under Test and Modification State**

Not performed. EUT is battery operated only.



## **2.3 99% EMISSION BANDWIDTH**

### **2.3.1 Specification Reference**

RSS-Gen Clause 4.6.1

### **2.3.2 Standard Applicable**

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured.

The transmitter shall be operated at its maximum carrier power measured under normal test conditions. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used given that a peak or peak hold may produce a wider bandwidth than actual.

The trace data points are recovered and directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

### **2.3.3 Equipment Under Test and Modification State**

Serial No: N/A / Test Configuration A

### **2.3.4 Date of Test/Initial of test personnel who performed the test**

September 7, 2012/FSC

### **2.3.5 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.3.6 Environmental Conditions**

Ambient Temperature	23.5°C
Relative Humidity	47.4%
ATM Pressure	99.1 kPa

### **2.3.7 Additional Observations**

- This is a conducted test.
- An offset of 10.9dB was added to compensate for the external attenuator and cable used.
- Span is wide enough to capture the channel transmission.
- RBW is 1% of the span.
- VBW is 3X RBW.
- Sweep is auto.




- Detector is peak.
- The % Power Bandwidth setting in the spectrum analyzer was set to 99% (default).
- The Channel Bandwidth measurement function of the spectrum analyzer was used for this test.

**2.3.8 Test Results (For reporting purposes only)**


Mode	Channel	Measured 99% Bandwidth (MHz)
802.11b	1 (2412 MHz)	12.58
	6 (2437 MHz)	12.66
	11 (2462 MHz)	12.66
802.11g	1 (2412 MHz)	19.79
	6 (2437 MHz)	19.79
	11 (2462 MHz)	19.47
802.11a	149 (5745 MHz)	18.67
	153 (5765 MHz)	18.59
	161 (5805 MHz)	18.83

**2.3.9 Test Results Plots**

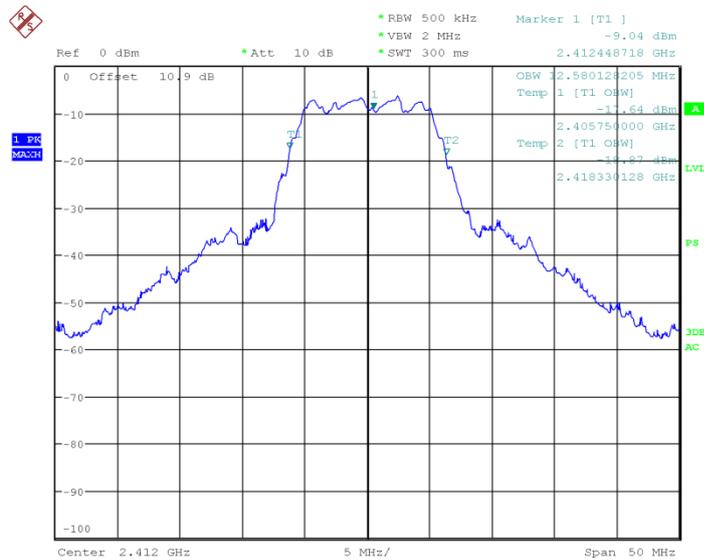


Date: 7.SEP.2012 15:00:27

**802.11b Low Channel**

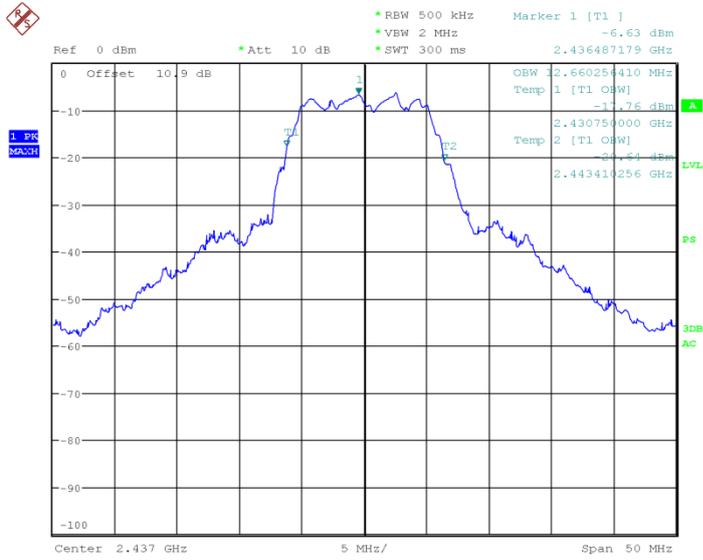


Date: 7.SEP.2012 15:01:46

**802.11b Mid Channel**

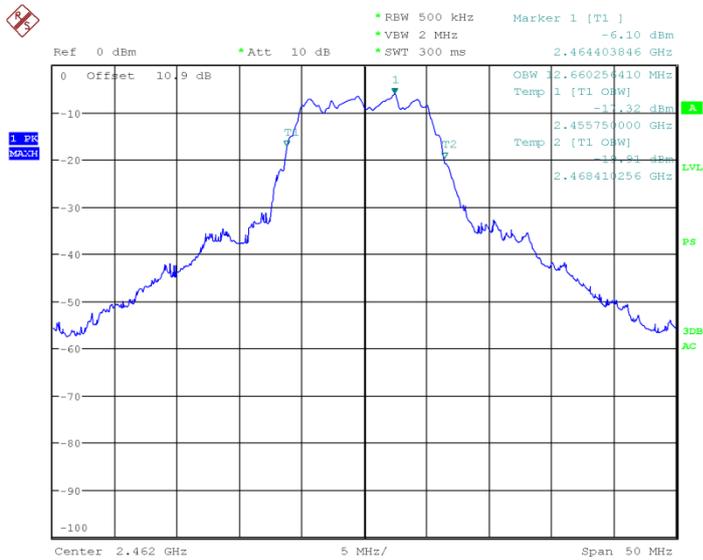


Date: 7.SEP.2012 15:04:11

**802.11b High Channel**

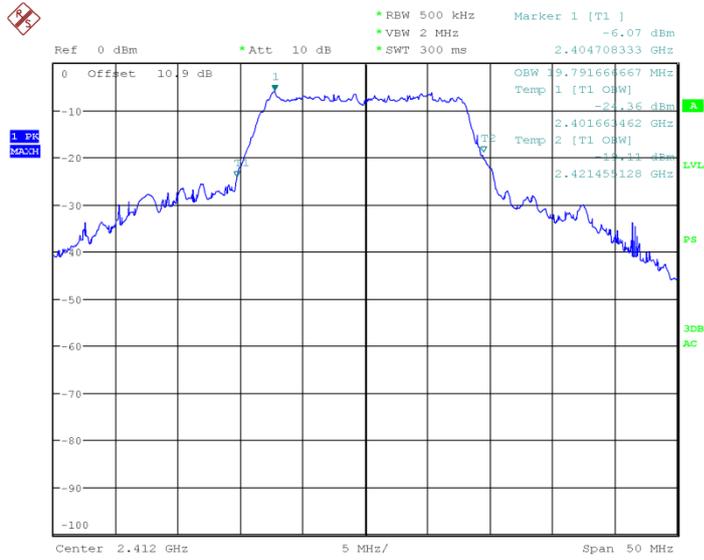


Date: 7.SEP.2012 15:17:11

**802.11g Low Channel**

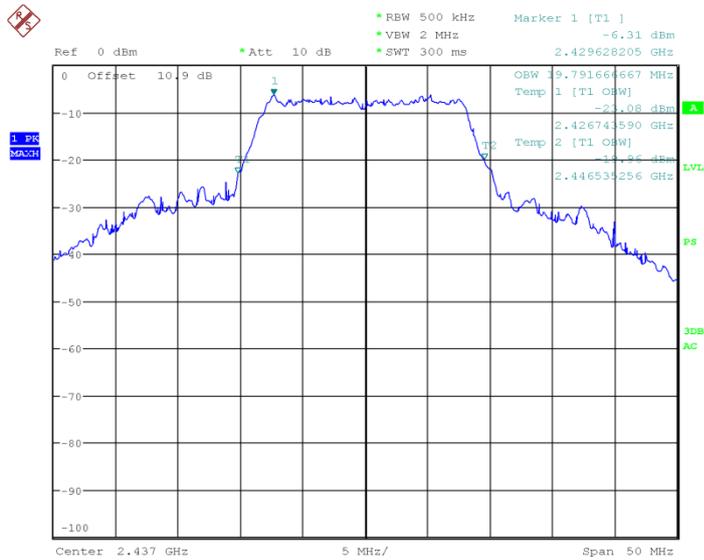


Date: 7.SEP.2012 15:19:02

**802.11g Mid Channel**

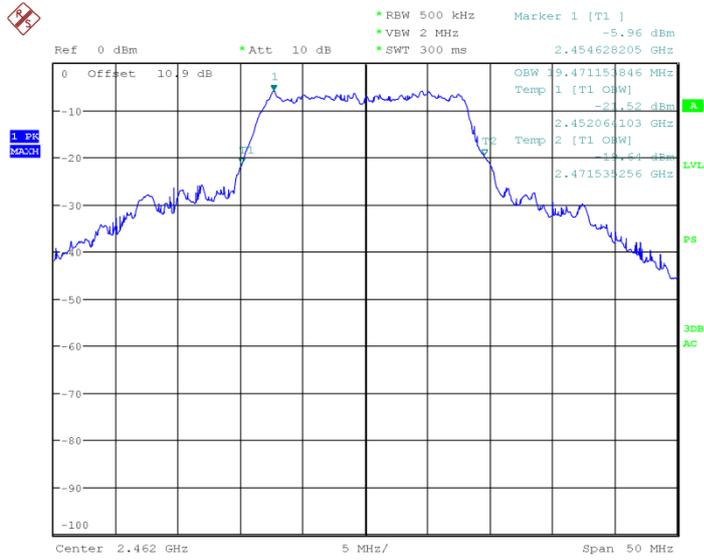


Date: 7.SEP.2012 15:20:37

### 802.11g High Channel

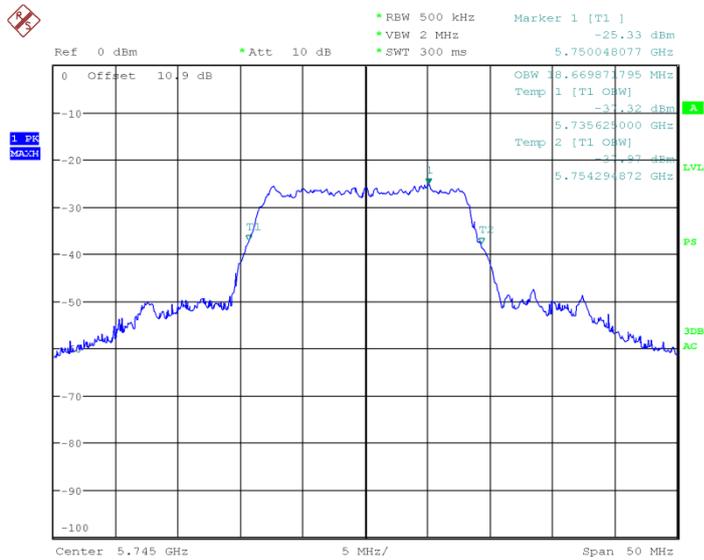


Date: 7.SEP.2012 15:27:18

### 802.11a Low Channel

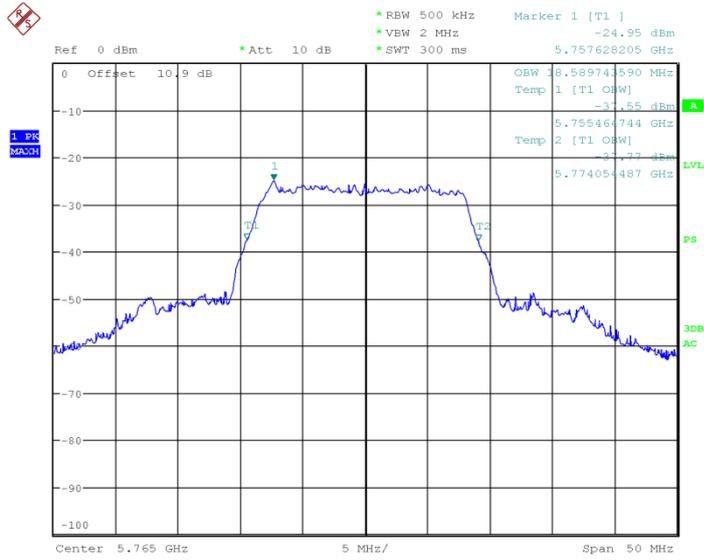

Date: 7.SEP.2012 15:29:05

**802.11a Mid Channel**

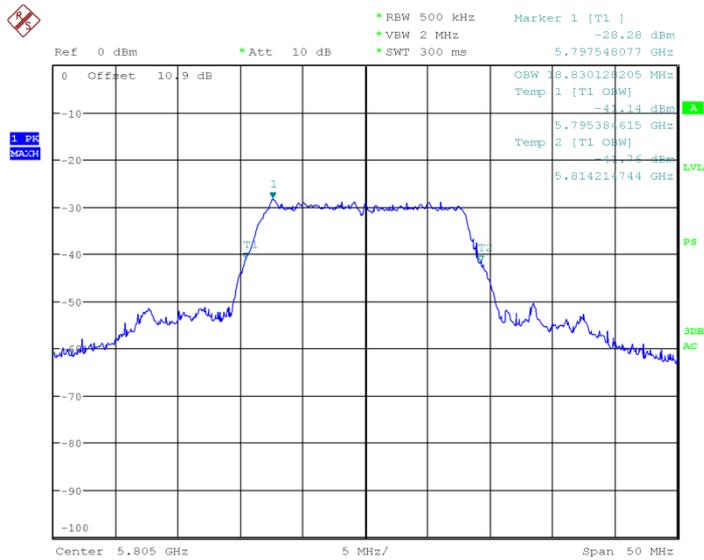

Date: 7.SEP.2012 15:30:31

**802.11a High Channel**



## **2.4 MINIMUM 6 dB RF BANDWIDTH**

### **2.4.1 Specification Reference**

Part 15 Subpart C §15.247(a)(2)

### **2.4.2 Standard Applicable**

(2) Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### **2.4.3 Equipment Under Test and Modification State**

Serial No: N/A / Test Configuration A

### **2.4.4 Date of Test/Initial of test personnel who performed the test**

September 7, 2012/FSC

### **2.4.5 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.4.6 Environmental Conditions**

Ambient Temperature	23.5°C
Relative Humidity	47.4%
ATM Pressure	99.1 kPa

### **2.4.7 Additional Observations**


- This is a conducted test as per DTS (6-dB) Bandwidth guidance of KDB 558074 (Revision to Compliance Measurement Guidance for 15.247 Digital Transmission Systems, April 24, 2012).
- An offset of 10.9dB was added to compensate for the external attenuator and cable used.
- Automatic bandwidth function of the spectrum analyzer was used for this test.
- Span is wide enough to capture the channel transmission.
- RBW is 1% to 5% of the fundamental bandwidth.
- VBW is 3X RBW.
- 100 kHz RBW setting not possible. Any RBW setting below 500 kHz will result in inaccurate measurement due to pronounced dip in the middle of the fundamental signal dividing the bandwidth by half when using automatic bandwidth function of the spectrum analyzer.
- Sweep is auto.
- Detector is peak.
- Trace is max hold.



**2.4.8 Test Results**


Mode	Channel	Measured Bandwidth (MHz)	Minimum Bandwidth (MHz)	Compliance
802.11b	1 (2412 MHz)	10.89	0.500	Complies
	6 (2437 MHz)	10.81	0.500	Complies
	11 (2462 MHz)	10.89	0.500	Complies
802.11g	1 (2412 MHz)	16.99	0.500	Complies
	6 (2437 MHz)	16.99	0.500	Complies
	11 (2462 MHz)	17.06	0.500	Complies
802.11a	149 (5745 MHz)	17.06	0.500	Complies
	153 (5765 MHz)	16.98	0.500	Complies
	161 (5805 MHz)	17.06	0.500	Complies

**2.4.9 Test Results Plots**

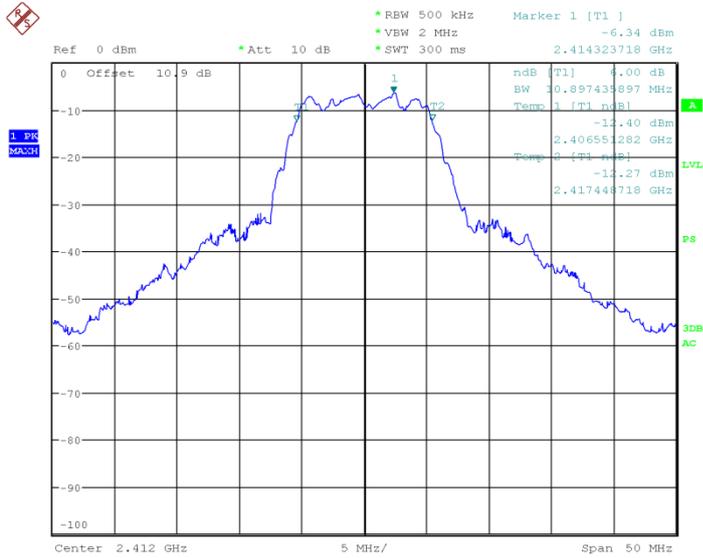


Date: 7.SEP.2012 15:13:53

**802.11b Low Channel**

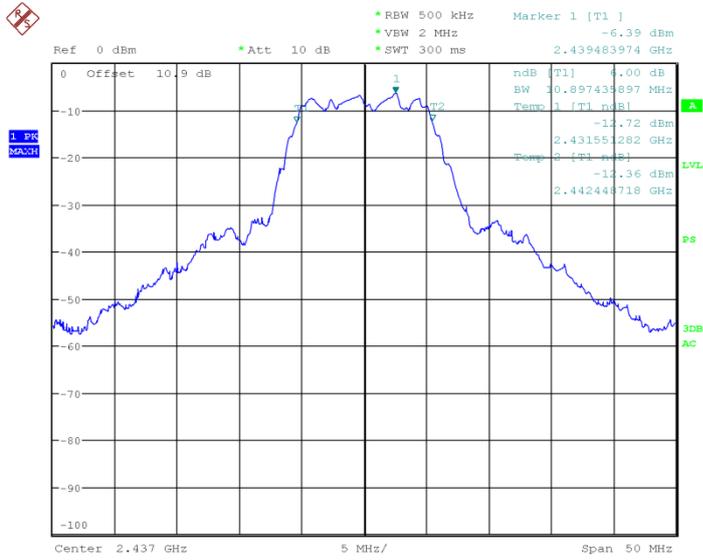


Date: 7.SEP.2012 15:02:38

### 802.11b Mid Channel

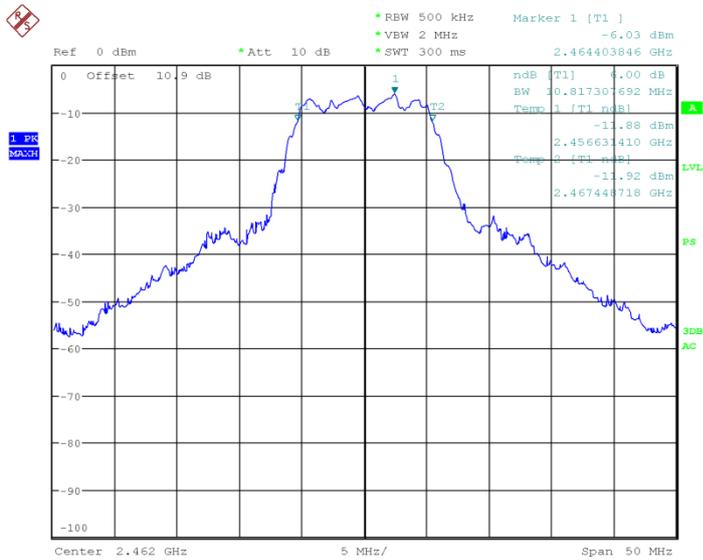


Date: 7.SEP.2012 15:03:48

### 802.11b High Channel

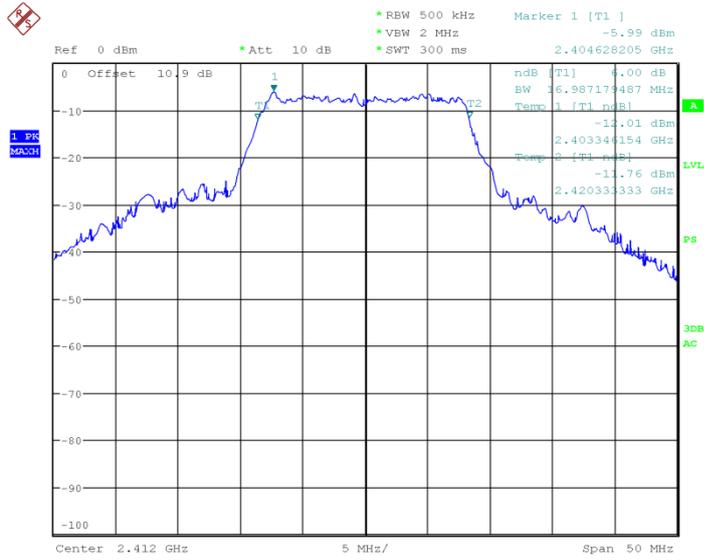


Date: 7.SEP.2012 15:16:27

### 802.11g Low Channel

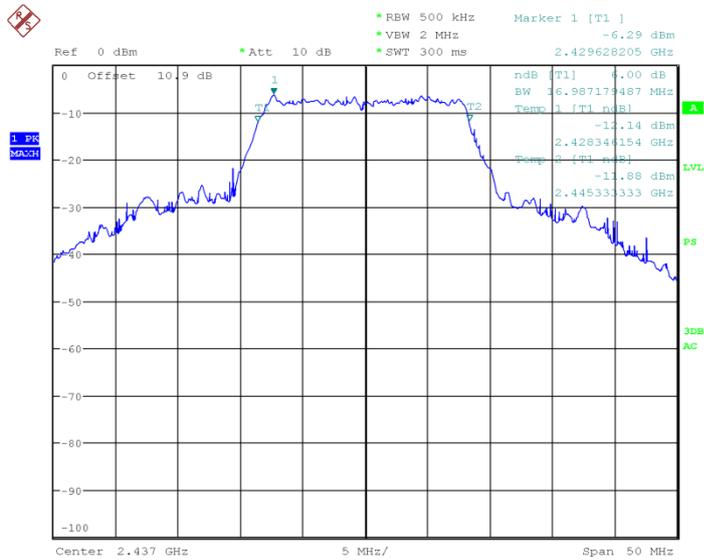


Date: 7.SEP.2012 15:18:36

### 802.11g Mid Channel

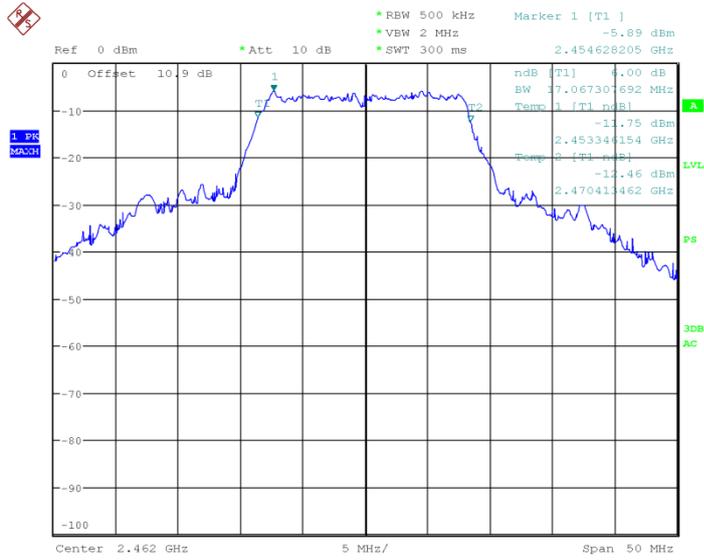


Date: 7.SEP.2012 15:20:12

### 802.11g High Channel

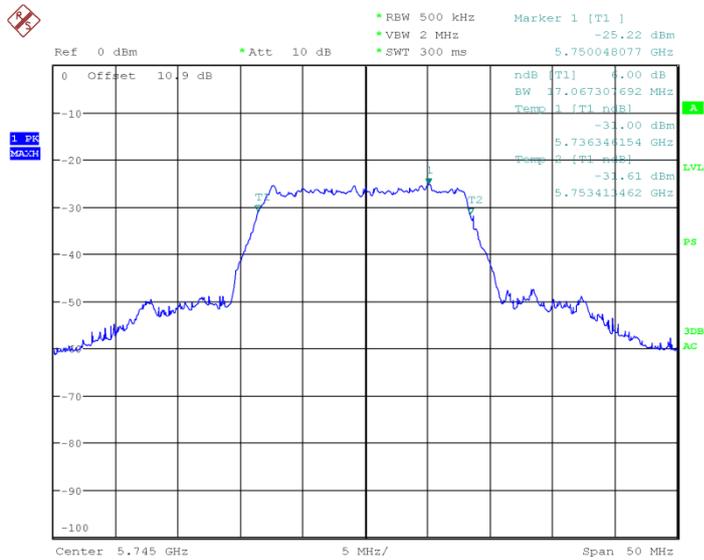


Date: 7.SEP.2012 15:26:56

### 802.11a Low Channel

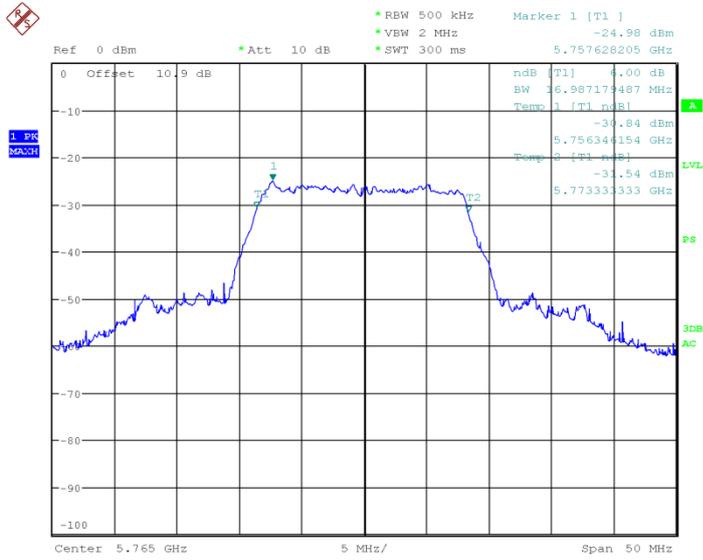

Date: 7.SEP.2012 15:28:35

### 802.11a Mid Channel

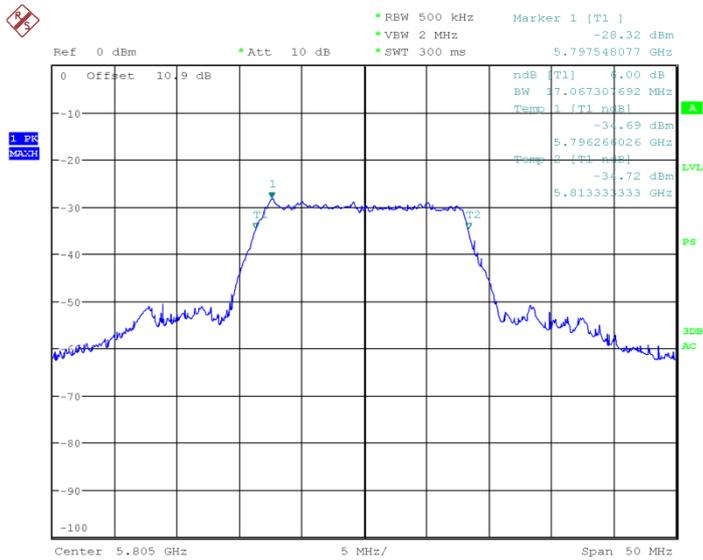

Date: 7.SEP.2012 15:30:12

### 802.11a High Channel



## **2.5 OUT-OF-BAND EMISSIONS - CONDUCTED**

### **2.5.1 Specification Reference**

Part 15 Subpart C §15.247(d)

### **2.5.2 Standard Applicable**

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### **2.5.3 Equipment Under Test and Modification State**

Serial No: N/A / Test Configuration A

### **2.5.4 Date of Test/Initial of test personnel who performed the test**

September 7, 2012/FSC

### **2.5.5 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.5.6 Environmental Conditions**


Ambient Temperature	23.5°C
Relative Humidity	47.4%
ATM Pressure	99.1 kPa

### **2.5.7 Additional Observations**

- This is a conducted test.
- An offset of 10.9dB (0.9dB for 802.11 a) was added to compensate for the external attenuator and cable used.
- RBW is 100kHz.VBW is 3X RBW.
- Sweep is auto. Detector is peak. Trace is max hold.
- Initial scan was performed to determine the highest level of the desired power within the band. Limit (display line) was drawn 30dB below this level (worst case).
- Spectrum was searched from 30MHz up to 26GHz (802.11 b/g) and up to 40GHz (802.11 a).


### 2.5.8 Test Results

See attached plots.

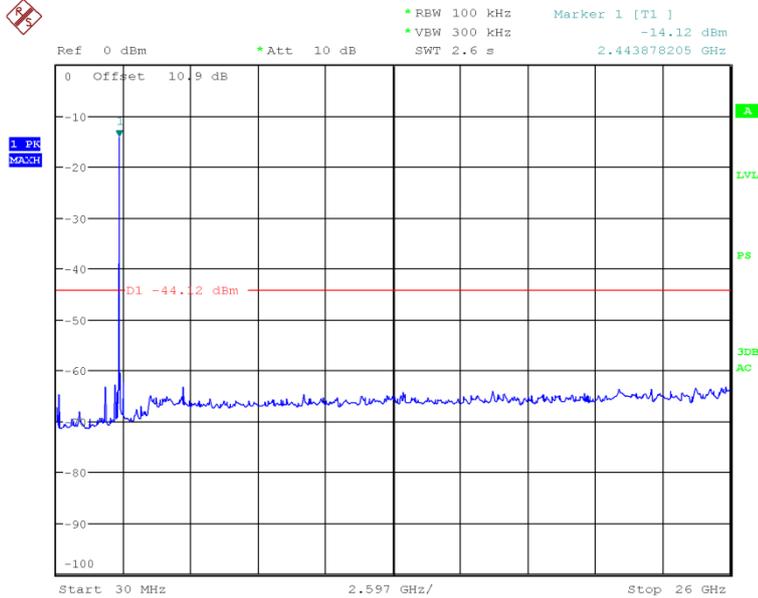


Date: 7.SEP.2012 16:28:30

#### Low Channel (802.11 b)

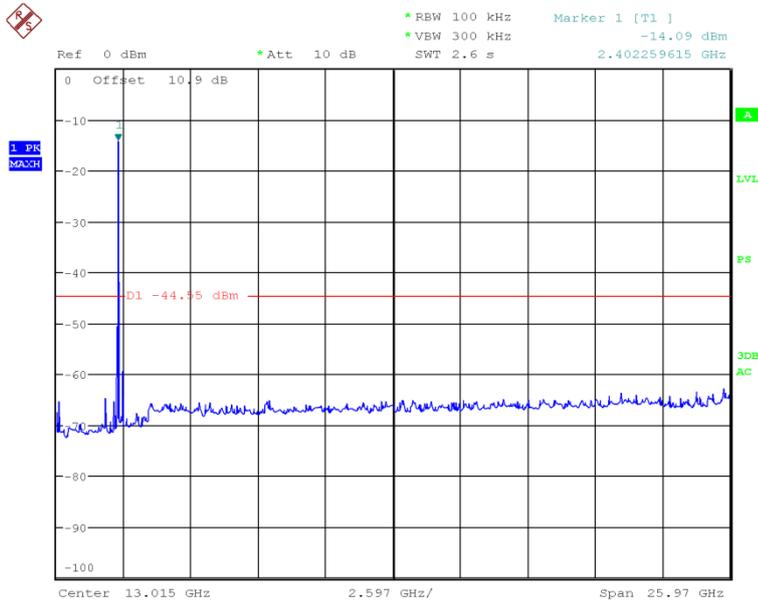


Date: 7.SEP.2012 16:30:34

#### Mid Channel (802.11 b)

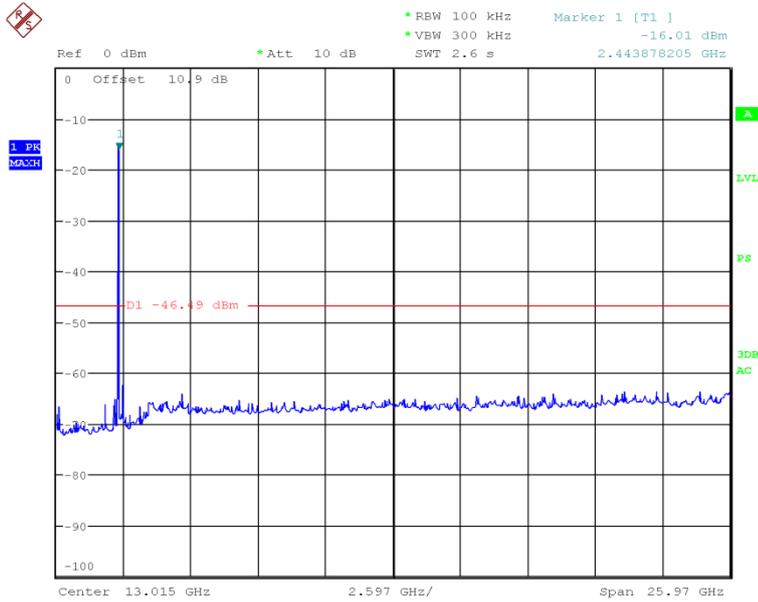


Date: 7.SEP.2012 16:32:42

### High Channel (802.11 b)

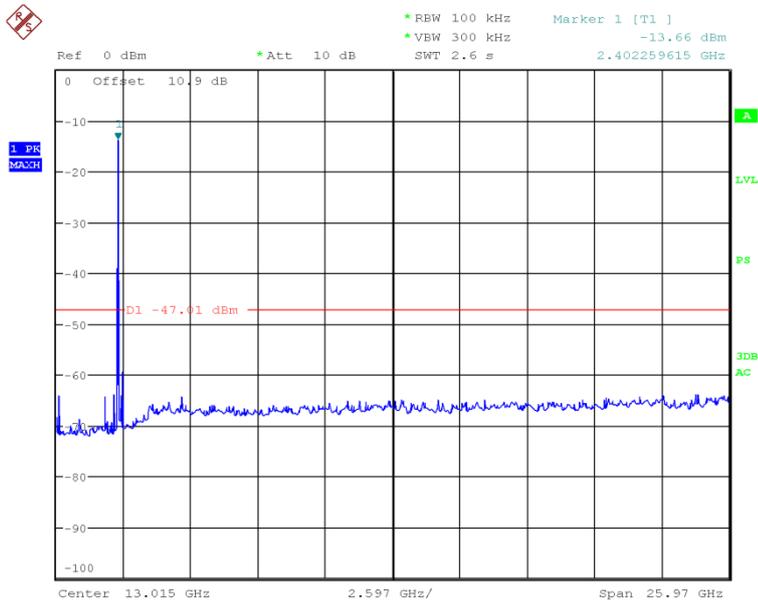


Date: 7.SEP.2012 16:39:34

### Low Channel (802.11 g)

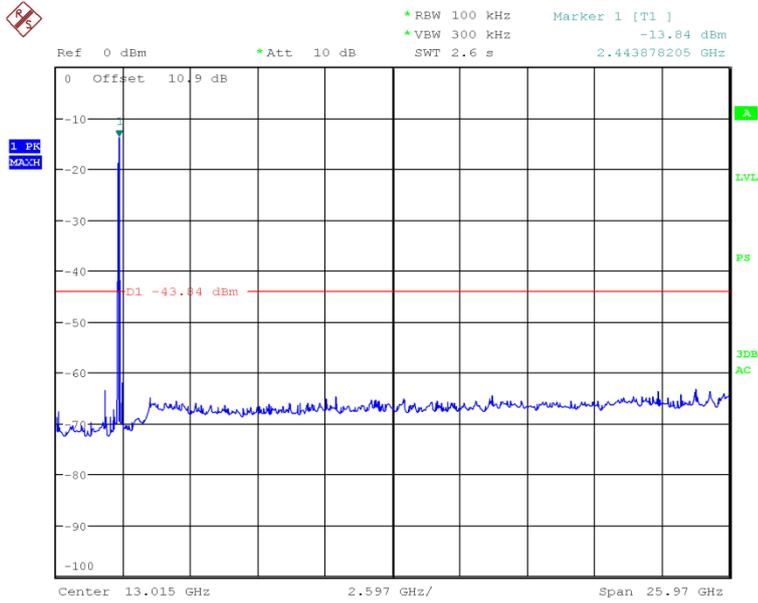


Date: 7.SEP.2012 16:40:38

### Mid Channel (802.11 g)

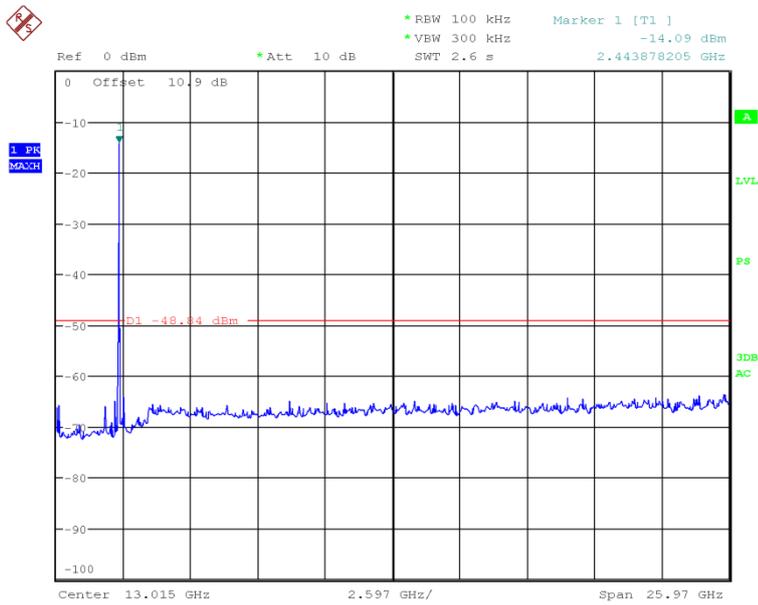


Date: 7.SEP.2012 16:41:49

### High Channel (802.11 g)

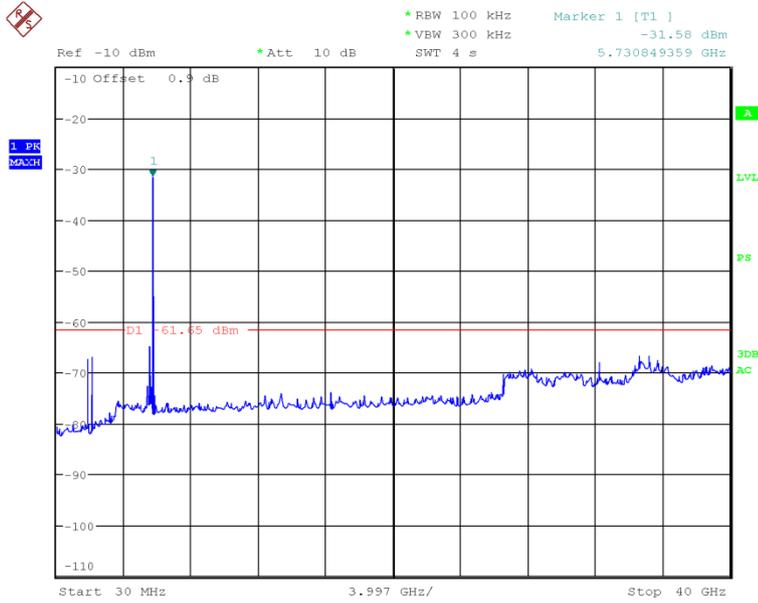


Date: 7.SEP.2012 16:51:30

### Low Channel (802.11 a)

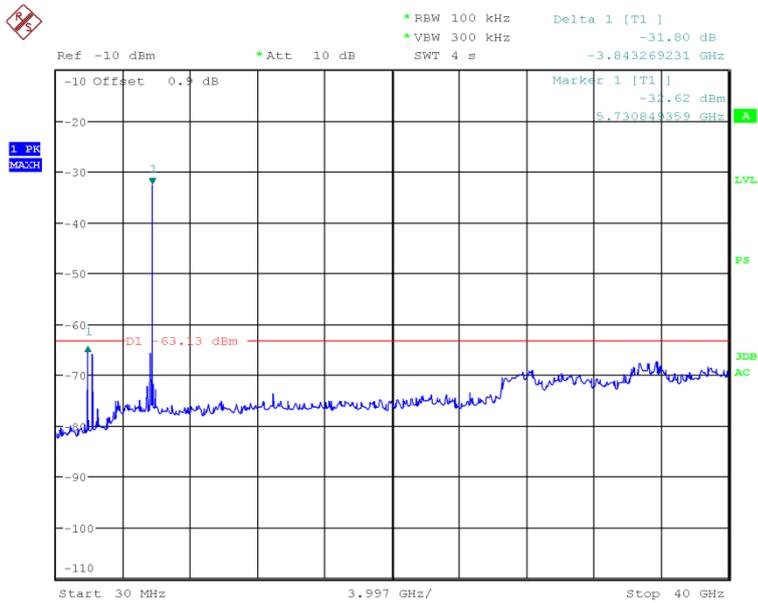

Date: 7.SEP.2012 16:53:44

### Mid Channel (802.11 a)

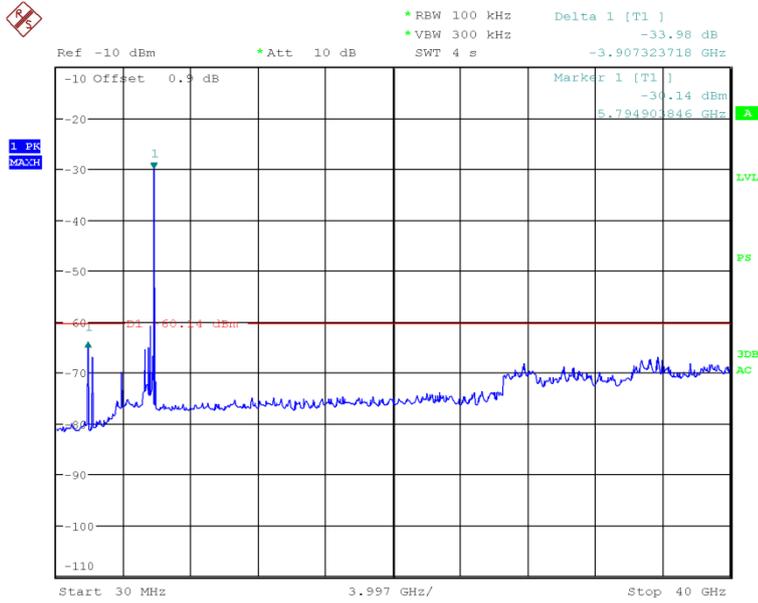

Date: 7.SEP.2012 16:56:34

### High Channel (802.11 a)



## **2.6 BAND-EDGE COMPLIANCE OF RF CONDUCTED EMISSIONS**

### **2.6.1 Specification Reference**

Part 15 Subpart C §15.247(d)

### **2.6.2 Standard Applicable**

See previous test.

### **2.6.3 Equipment Under Test and Modification State**

Serial No: N/A/ Test Configuration A

### **2.6.4 Date of Test/Initial of test personnel who performed the test**

September 9, 2012/FSC

### **2.6.5 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.6.6 Environmental Conditions**


Ambient Temperature	23.5°C
Relative Humidity	47.4%
ATM Pressure	99.1 kPa

### **2.6.7 Additional Observations**

- Setup is identical to “Out-of-Band Emissions – Conducted” test (previous test).
- Band-edge (2400MHz and 2483.5MHz/5727MHz and 5850MHz) emissions were verified in this test.
- The spectrum analyzer was centred on the band-edge frequency while setting the EUT to the corresponding transmit channel (i.e. Low Channel for lower band-edge).
- RBW setting used is 100 kHz.
- Limit used is 20dB which is relative to the in-band peak output power in 100 kHz.
- The worst delta from the highest level of desired power to or beyond the band edge is presented in this test report.


### **2.6.8 Test Results**

Complies. See attached plots.

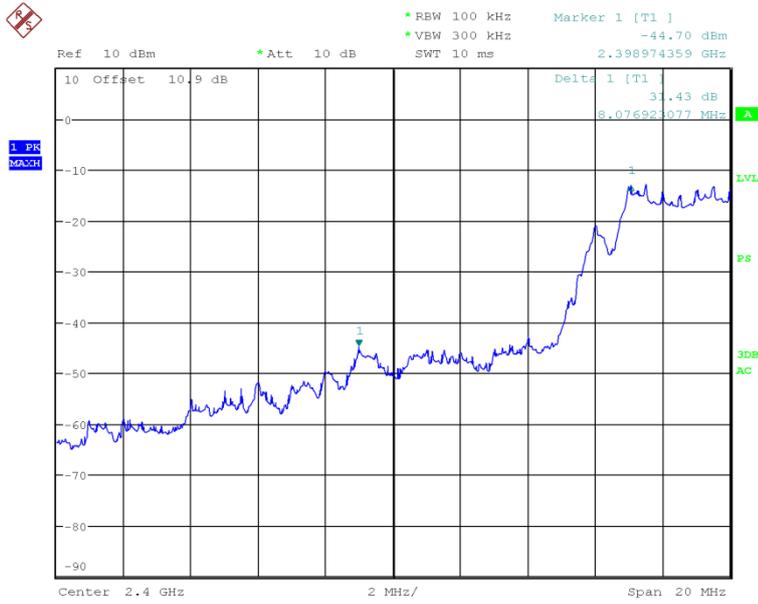


Date: 9.SEP.2012 08:24:29

**Lower Band-Edge (802.11 b)**

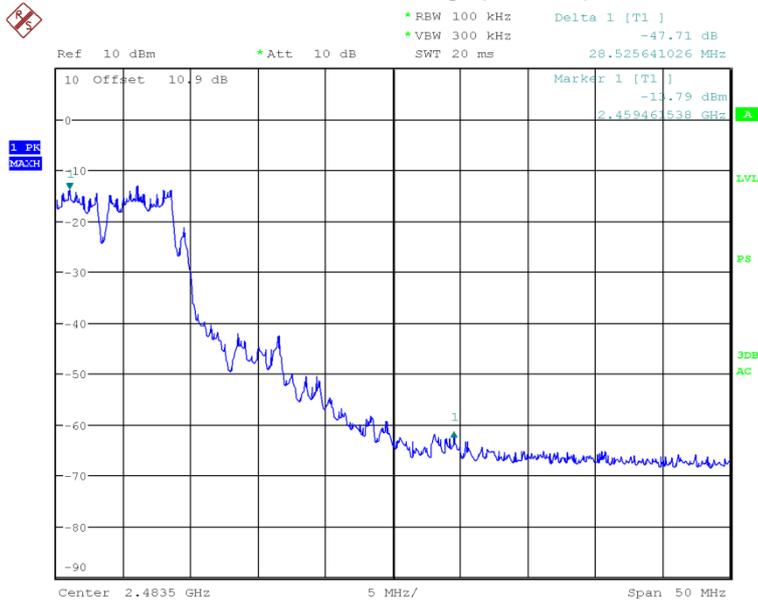


Date: 9.SEP.2012 08:30:37

**Higher Band-Edge (802.11 b)**

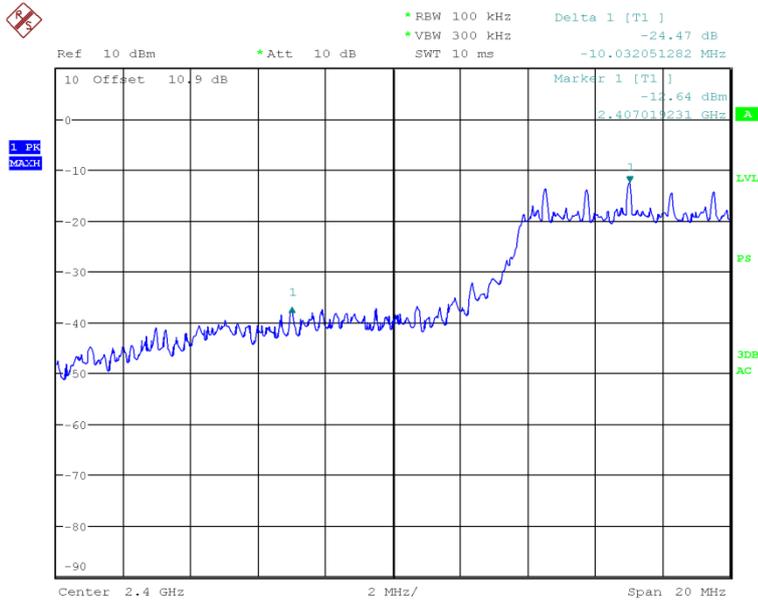


Date: 9.SEP.2012 08:28:15

**Lower Band-Edge (802.11 g)**

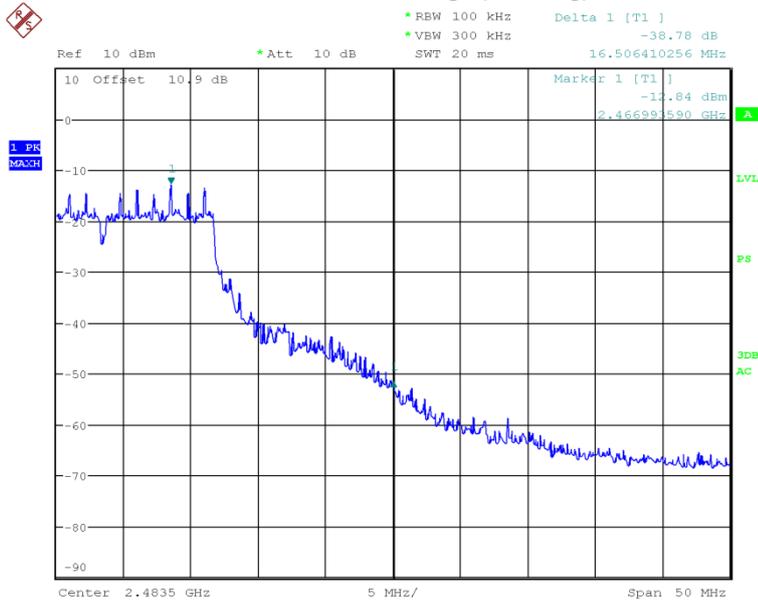


Date: 9.SEP.2012 08:31:51

**Higher Band-Edge (802.11 g)**

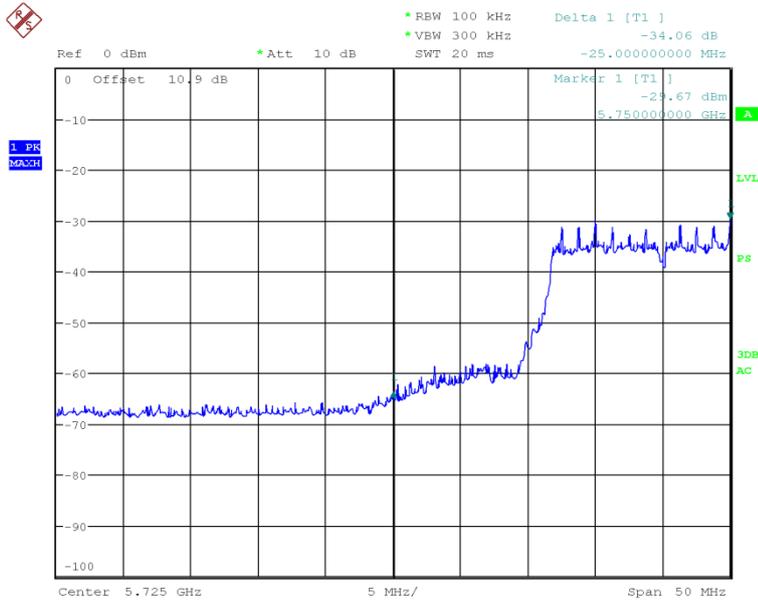

Date: 9.SEP.2012 08:34:03

**Lower Band-Edge (802.11 a)**

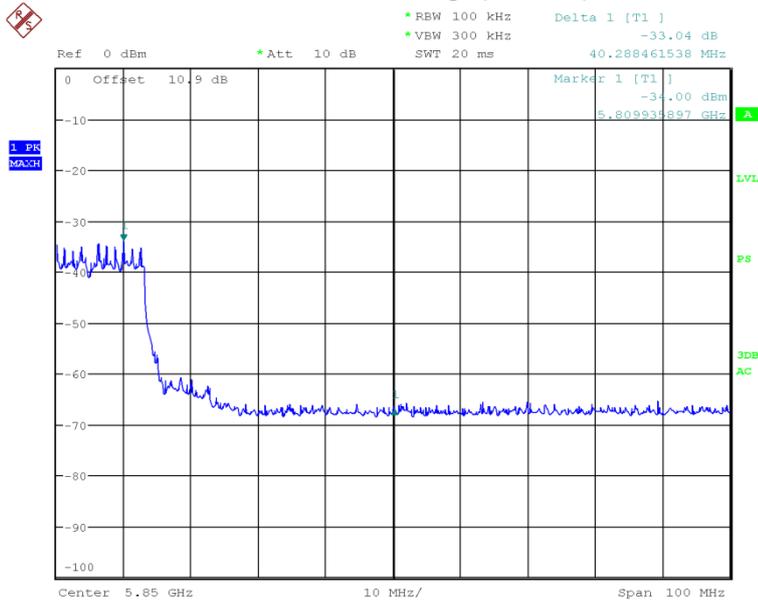

Date: 9.SEP.2012 08:36:04

**Higher Band-Edge (802.11 a)**



## **2.7 SPURIOUS RADIATED EMISSIONS**

### **2.7.1 Specification Reference**

Part 15 Subpart C §15.247(d)

### **2.7.2 Standard Applicable**

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### **2.7.3 Equipment Under Test and Modification State**

Serial No: N/A / Test Configuration B

### **2.7.4 Date of Test/Initial of test personnel who performed the test**

May 09 to May 20, 2013/FSC,JMG,LS

### **2.7.5 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.7.6 Environmental Conditions**

Ambient Temperature	23.3 to 25.6°C
Relative Humidity	48.7 to 50.7%
ATM Pressure	99.2 to 100.1 kPa

### **2.7.7 Additional Observations**

- This is a radiated test. The spectrum was searched from 30MHz to the 10<sup>th</sup> harmonic.
- There are no emissions found that do not comply to the restricted bands defined in FCC Part 15 Subpart C, 15.205 or Part 15.247(d).
- Test procedure is consistent with those specified under C63.10.
- Measurement was done using EMC32 automated software. Reported level is the actual level with all the correction factors factored in. Correction Factor column is for informational purposes only. See Section 2.7.8 for sample computation.



**2.7.8 Sample Computation (Radiated Emission)**


Measuring equipment raw measurement (db $\mu$ V) @ 30 MHz		24.4
Correction Factor (dB)	Asset# 1066 (cable)	0.3
	Asset# 1172 (cable)	0.3
	Asset# 1016 (preamplifier)	-30.7
	Asset# 1175(cable)	0.3
	Asset# 1002 (antenna)	17.2
<b>Reported QuasiPeak Final Measurement (db<math>\mu</math>V/m) @ 30MHz</b>		<b>11.8</b>

**2.7.9 Test Results**

See attached plots.



**2.7.10 Test Results Below 1GHz (Receive Mode)**

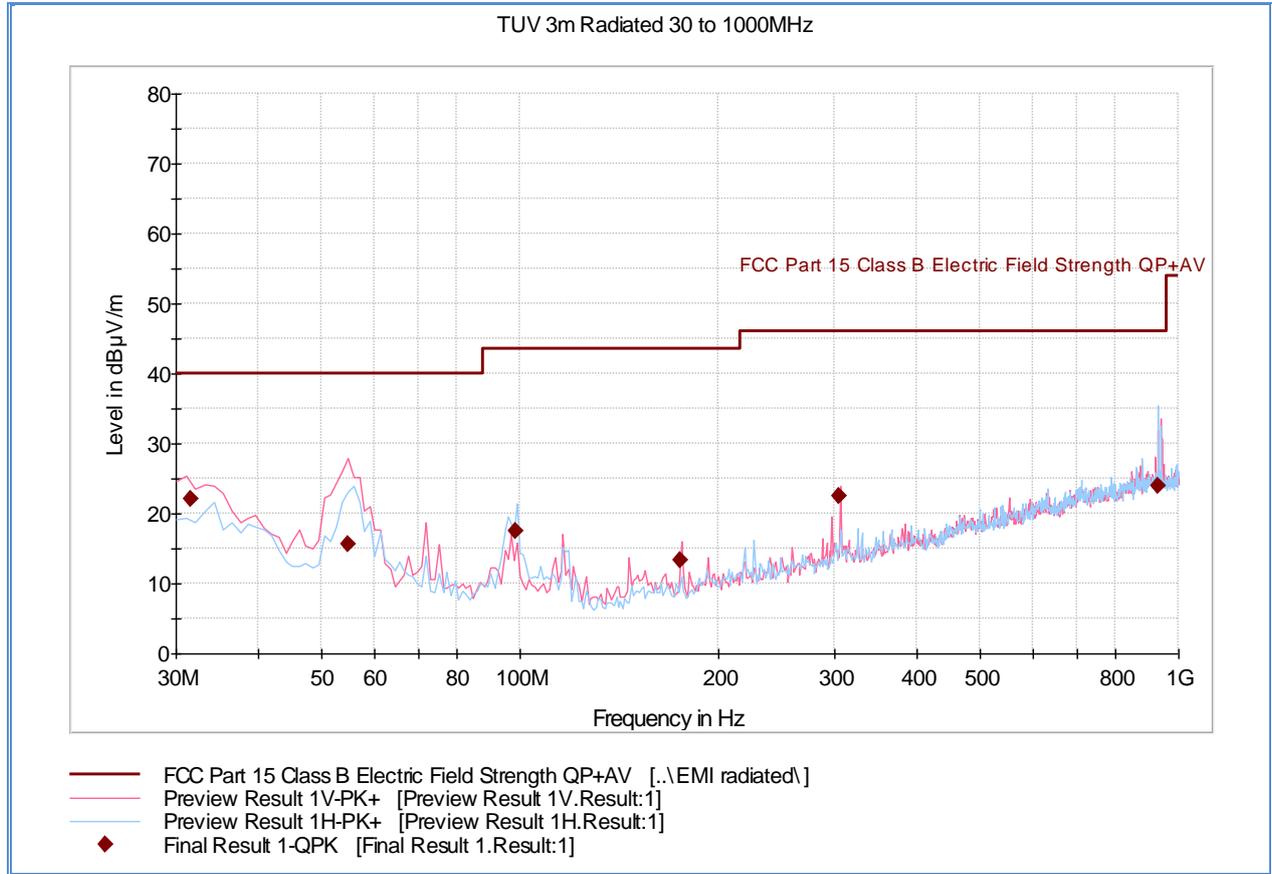


**Quasi Peak Data**

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
31.520000	22.1	1000.0	120.000	100.0	V	84.0	-13.5	18.0	40.0
54.788889	15.7	1000.0	120.000	100.0	V	28.0	-22.5	24.3	40.0
98.457778	17.5	1000.0	120.000	103.0	H	-1.0	-22.1	26.0	43.5
175.260000	13.4	1000.0	120.000	100.0	V	180.0	-21.3	30.1	43.5
305.428889	22.6	1000.0	120.000	100.0	V	45.0	-16.1	23.4	46.0
929.622222	24.0	1000.0	120.000	103.0	H	181.0	-5.2	22.0	46.0



2.7.11 Test Results Above 1GHz (Receive Mode)

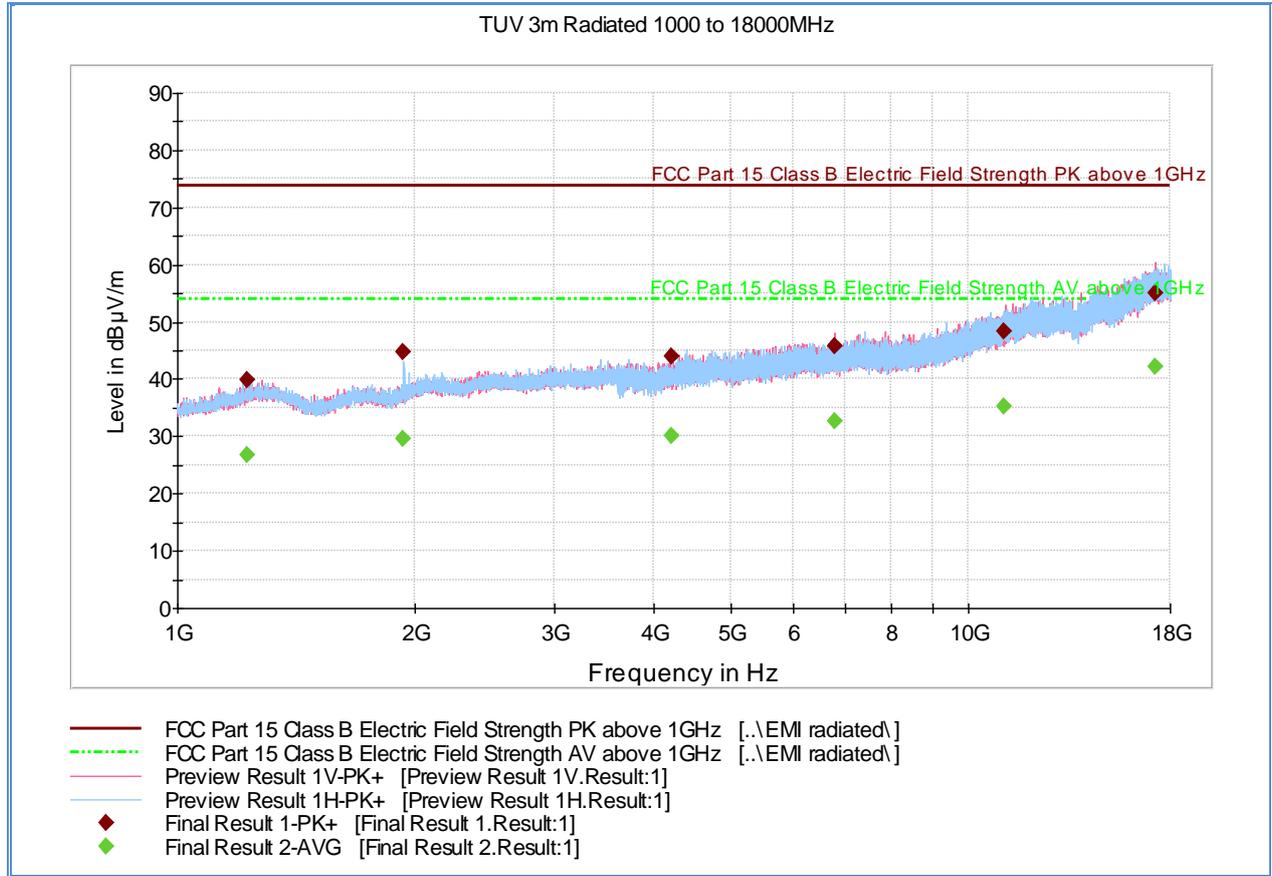

Peak Data

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
1223.526667	39.9	1000.0	1000.000	173.7	H	52.0	-4.9	34.0	73.9
1932.546667	44.7	1000.0	1000.000	135.8	H	296.0	-2.0	29.2	73.9
4219.420000	43.9	1000.0	1000.000	390.4	V	96.0	3.9	30.0	73.9
6785.073333	45.9	1000.0	1000.000	390.4	V	330.0	8.7	28.0	73.9
11096.16000	48.3	1000.0	1000.000	390.4	H	84.0	14.6	25.6	73.9
17229.84000	55.0	1000.0	1000.000	235.4	V	298.0	21.6	18.9	73.9


Average Data

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
1223.526667	26.7	1000.0	1000.000	173.7	H	52.0	-4.9	27.2	53.9
1932.546667	29.6	1000.0	1000.000	135.8	H	296.0	-2.0	24.3	53.9
4219.420000	30.0	1000.0	1000.000	390.4	V	96.0	3.9	23.9	53.9
6785.073333	32.6	1000.0	1000.000	390.4	V	330.0	8.7	21.3	53.9
11096.16000	35.3	1000.0	1000.000	390.4	H	84.0	14.6	18.6	53.9
17229.84000	42.1	1000.0	1000.000	235.4	V	298.0	21.6	11.8	53.9

**Test Notes:** No significant emissions observed above 2GHz. All measurements presented above 2GHz are noise floor figures.



**2.7.12 Test Results Below 1GHz (High Channel – 802.11 b)**

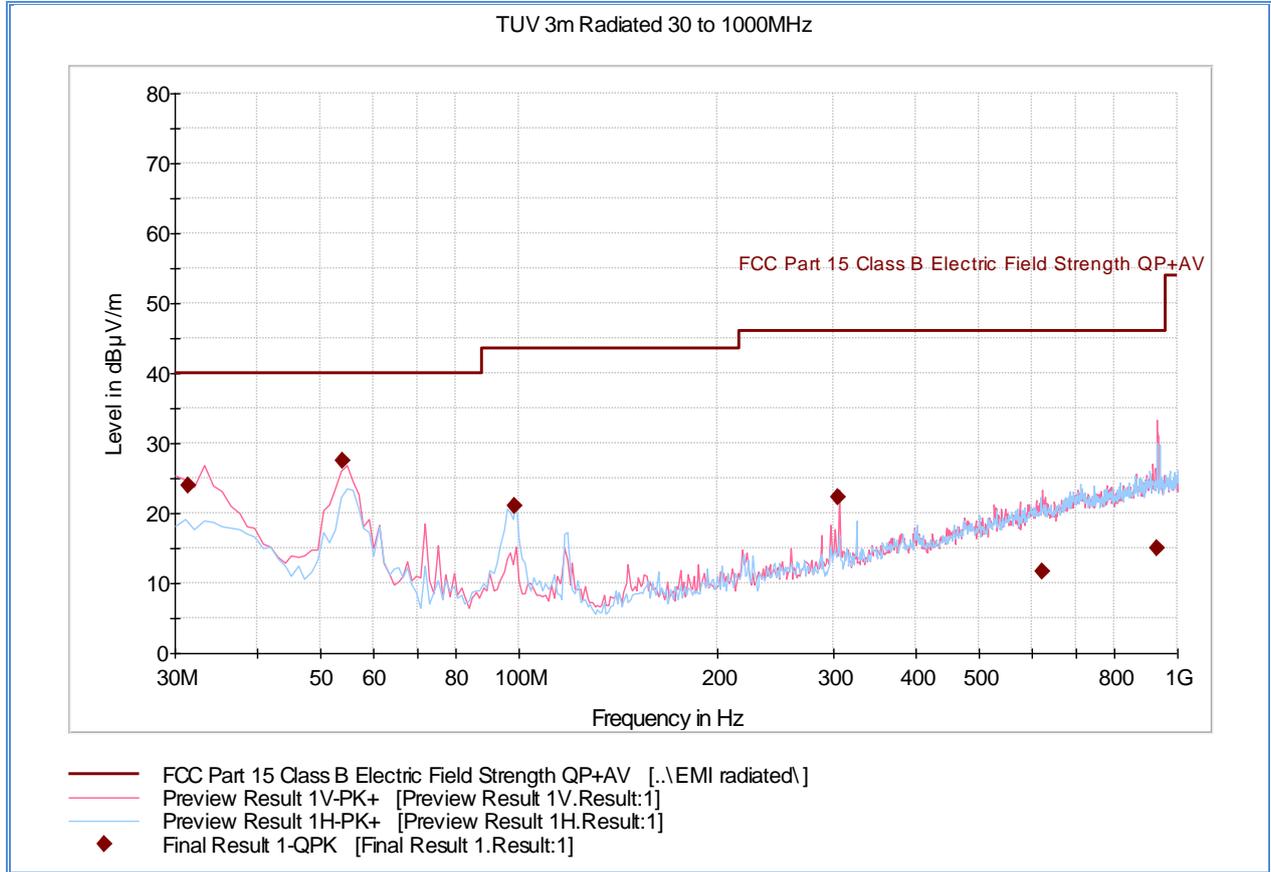


**Quasi Peak Data**

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
31.473333	23.9	1000.0	120.000	100.0	V	271.0	-13.5	16.1	40.0
53.908889	27.4	1000.0	120.000	100.0	V	318.0	-22.3	12.6	40.0
98.457778	21.0	1000.0	120.000	103.0	H	236.0	-22.1	22.5	43.5
305.431111	22.3	1000.0	120.000	100.0	V	129.0	-16.1	23.7	46.0
621.617778	11.6	1000.0	120.000	100.0	V	97.0	-8.9	34.4	46.0
929.782222	15.0	1000.0	120.000	100.0	V	49.0	-5.2	31.0	46.0

**Test Notes:** Only worst case channel presented for spurious emissions below 1GHz.



**2.7.13 Test Results Below 1GHz (High Channel – 802.11 g)**

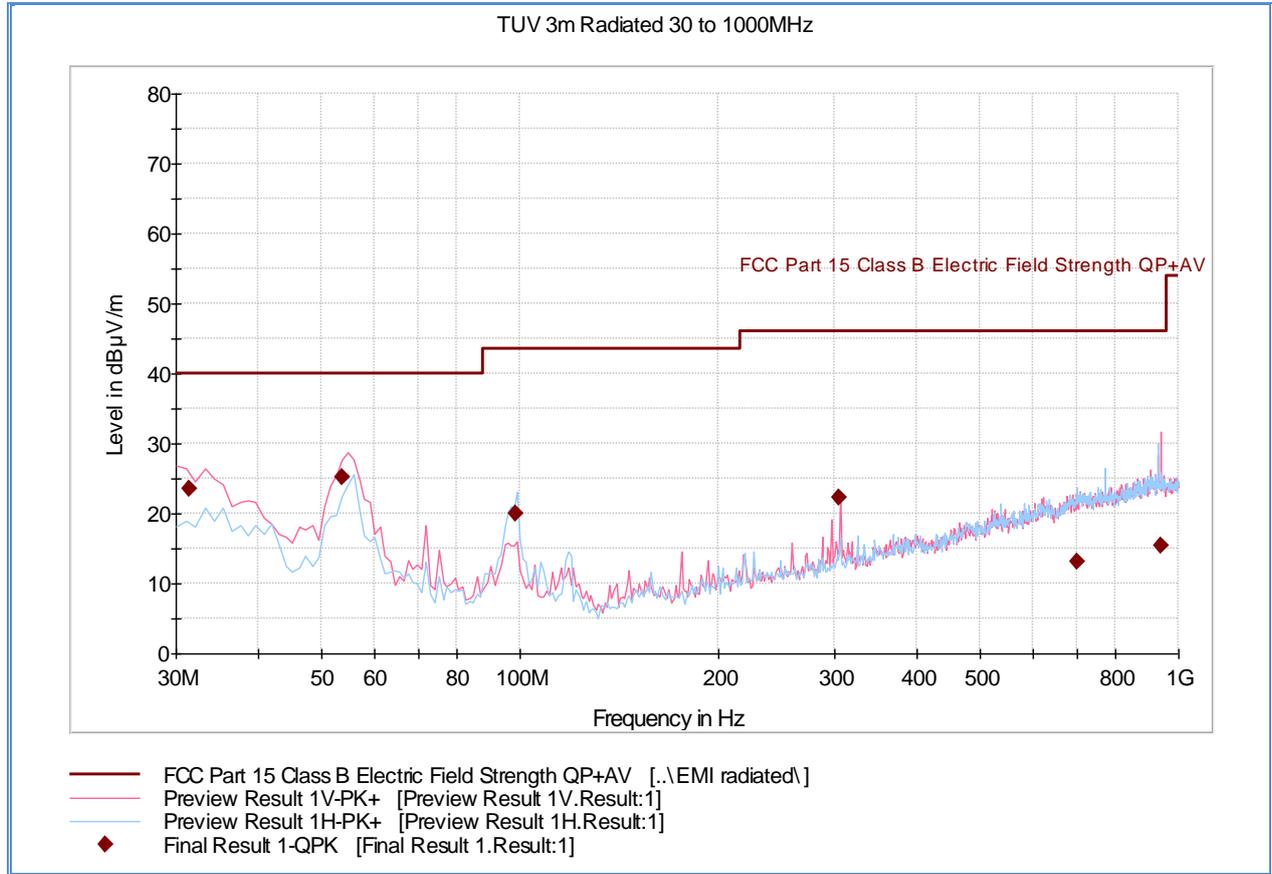


**Quasi Peak Data**

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
31.480000	23.5	1000.0	120.000	100.0	V	19.0	-13.5	16.5	40.0
53.548889	25.3	1000.0	120.000	100.0	V	36.0	-22.2	14.7	40.0
98.457778	19.9	1000.0	120.000	103.0	H	29.0	-22.1	23.6	43.5
305.431111	22.3	1000.0	120.000	100.0	V	208.0	-16.1	23.7	46.0
701.977778	13.0	1000.0	120.000	103.0	H	192.0	-7.5	33.0	46.0
938.602222	15.5	1000.0	120.000	100.0	V	205.0	-5.3	30.5	46.0

**Test Notes:** Only worst case channel presented for spurious emissions below 1GHz.



**2.7.14 Test Results Below 1GHz (Low Channel – 802.11 a)**

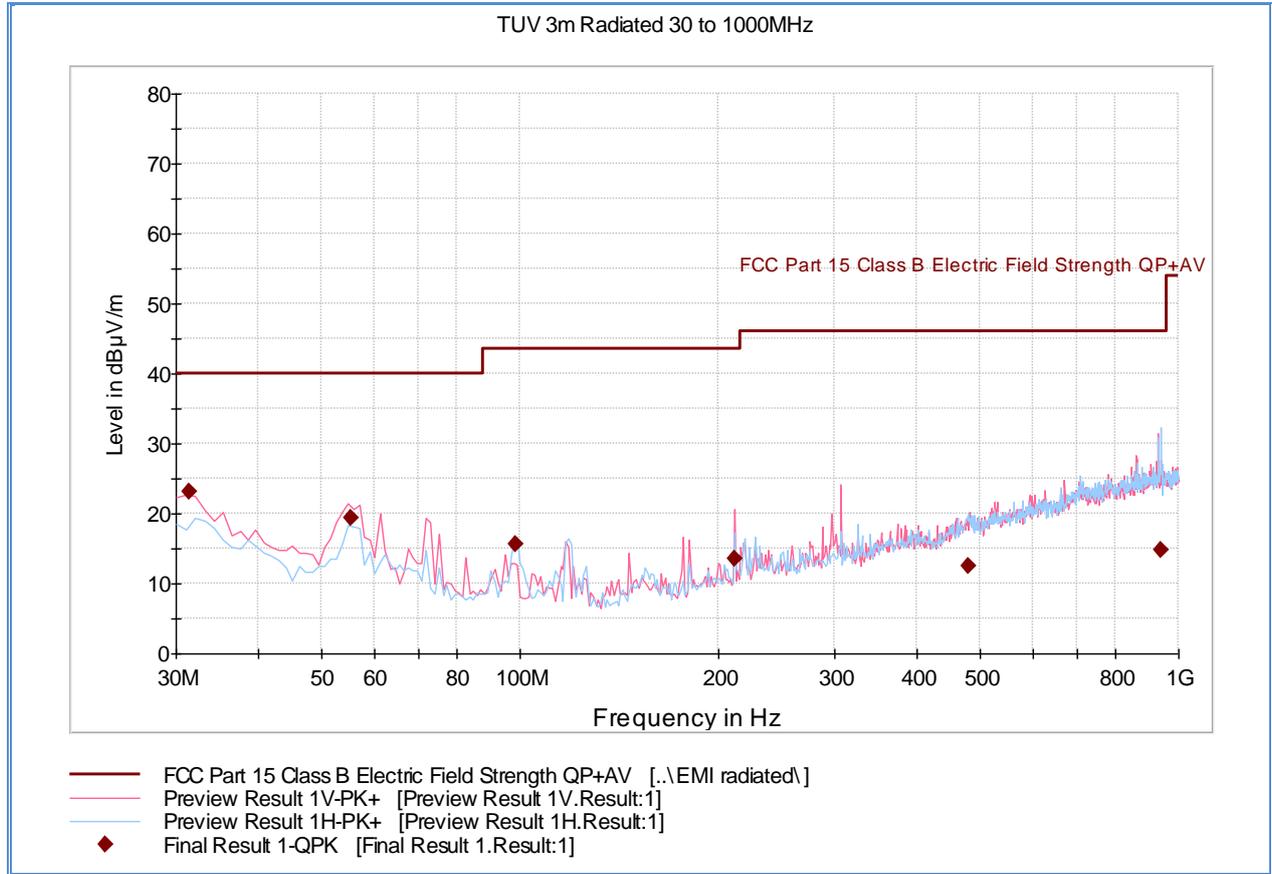


**Quasi Peak Data**

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
31.480000	23.2	1000.0	120.000	100.0	V	314.0	-13.5	16.8	40.0
55.268889	19.4	1000.0	120.000	100.0	V	281.0	-22.6	20.6	40.0
98.497778	15.7	1000.0	120.000	103.0	H	226.0	-22.1	27.8	43.5
211.264444	13.6	1000.0	120.000	100.0	V	183.0	-19.4	29.9	43.5
480.028889	12.5	1000.0	120.000	100.0	V	30.0	-11.6	33.5	46.0
940.242222	14.9	1000.0	120.000	103.0	H	46.0	-5.3	31.1	46.0

**Test Notes:** Only worst case channel presented for spurious emissions below 1GHz.



**2.7.15 Test Results Above 1GHz (Low Channel -802.11 b)**

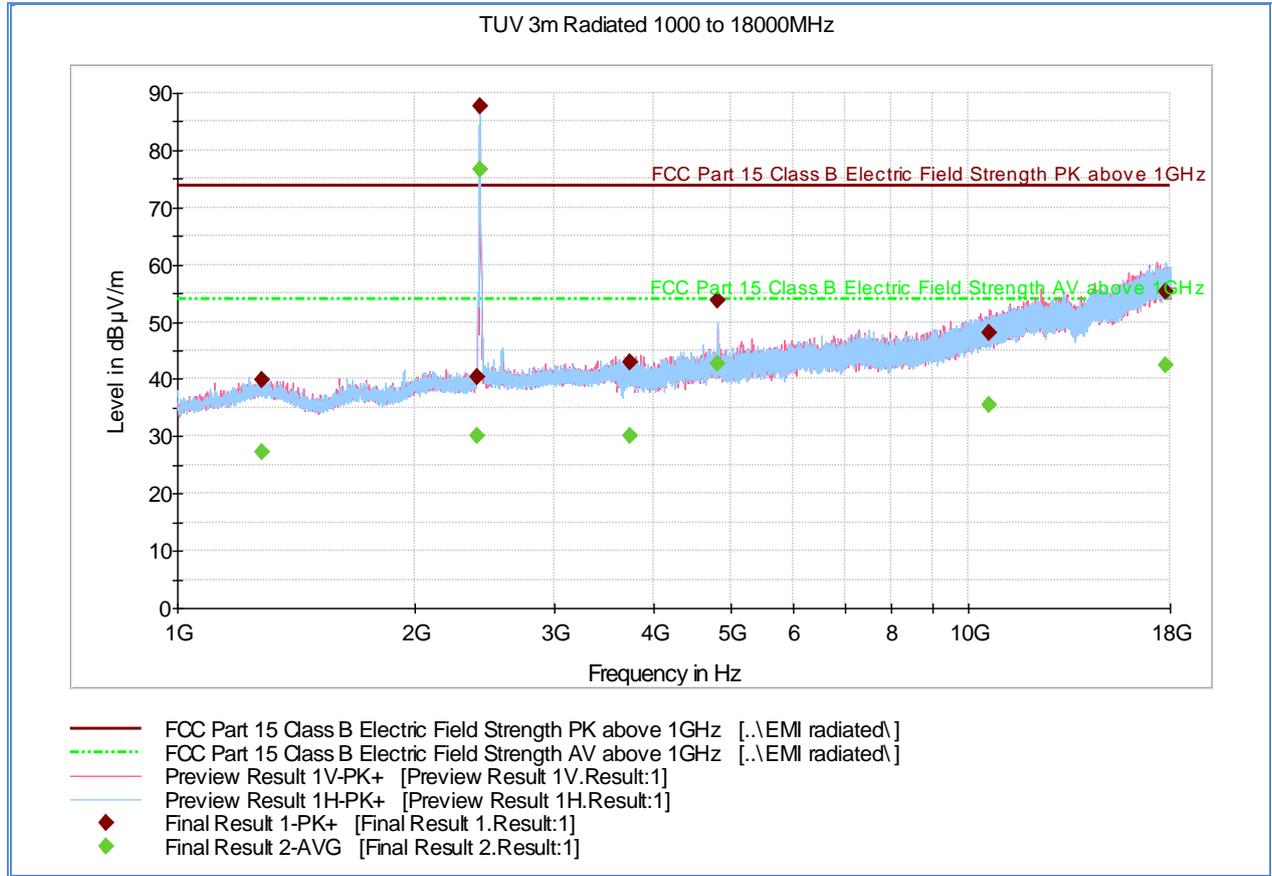

**Peak Data**


Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
1280.513333	39.9	1000.0	1000.000	223.5	V	69.0	-4.8	34.0	73.9
2414.013333	87.8	1000.0	1000.000	111.9	H	279.0	-0.4	-13.8	73.9
3730.666667	43.0	1000.0	1000.000	240.4	V	155.0	3.0	30.9	73.9
4824.006667	53.7	1000.0	1000.000	111.9	H	167.0	5.3	20.2	73.9
10618.58000	48.2	1000.0	1000.000	392.5	V	314.0	13.7	25.7	73.9
17806.18000	55.3	1000.0	1000.000	249.4	H	107.0	22.2	18.6	73.9

**Average Data**

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
1280.513333	27.3	1000.0	1000.000	223.5	V	69.0	-4.8	26.6	53.9
2414.013333	76.7	1000.0	1000.000	111.9	H	279.0	-0.4	-22.8	53.9
3730.666667	30.1	1000.0	1000.000	240.4	V	155.0	3.0	23.8	53.9
4824.006667	42.6	1000.0	1000.000	111.9	H	167.0	5.3	11.3	53.9
10618.58000	35.5	1000.0	1000.000	392.5	V	314.0	13.7	18.4	53.9
17806.18000	42.3	1000.0	1000.000	249.4	H	107.0	22.2	11.6	53.9

**Test Notes:** 2414 MHz is part of fundamental measurement and not subjected to 15.209 and 15.205 limits. There are no emissions observed above 6GHz (noise floor measurements).

### 2.7.16 Test Results Lower Band Edge 802.11 b

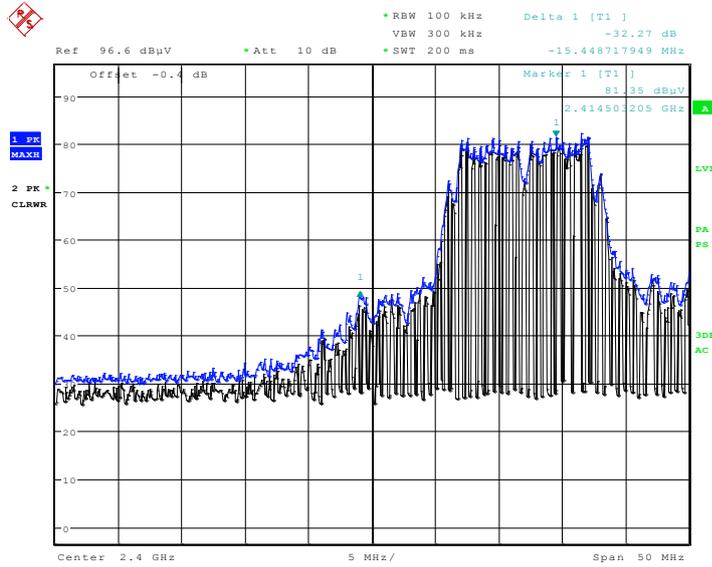


Date: 20.MAY.2013 07:35:12

**Test Notes:** Carrier frequency (Low Channel) was maximized for this test. Correction factor of -0.4dB is from the cable, antenna and preamp used. Limit for this test is 20dBc.



2.7.17 Test Results Restricted Band (2310 MHz to 2390 MHz) 802.11 b

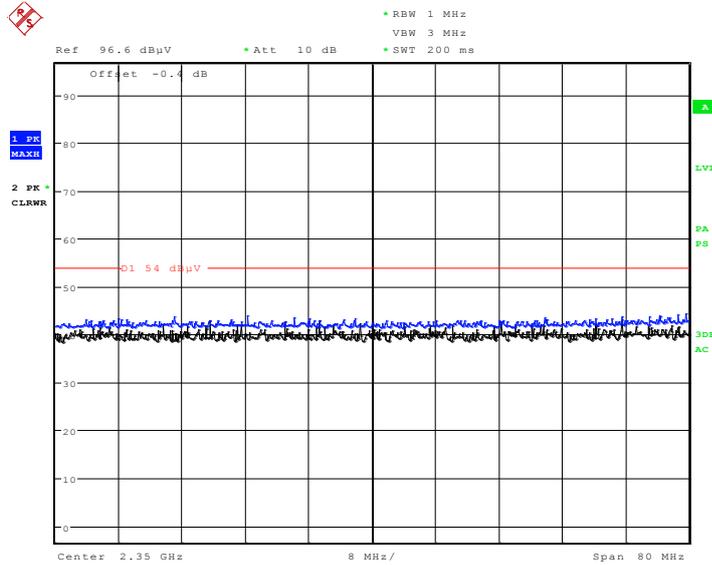


Date: 20.MAY.2013 07:36:08

**Test Notes:** Carrier frequency (Low Channel) was maximized for this test. Correction factor of -0.4dB is from the cable, antenna and preamp used. Peak complies with Average limit therefore no Average measurement performed.



**2.7.18 Test Results Above 1GHz 802.11 b (Mid Channel)**

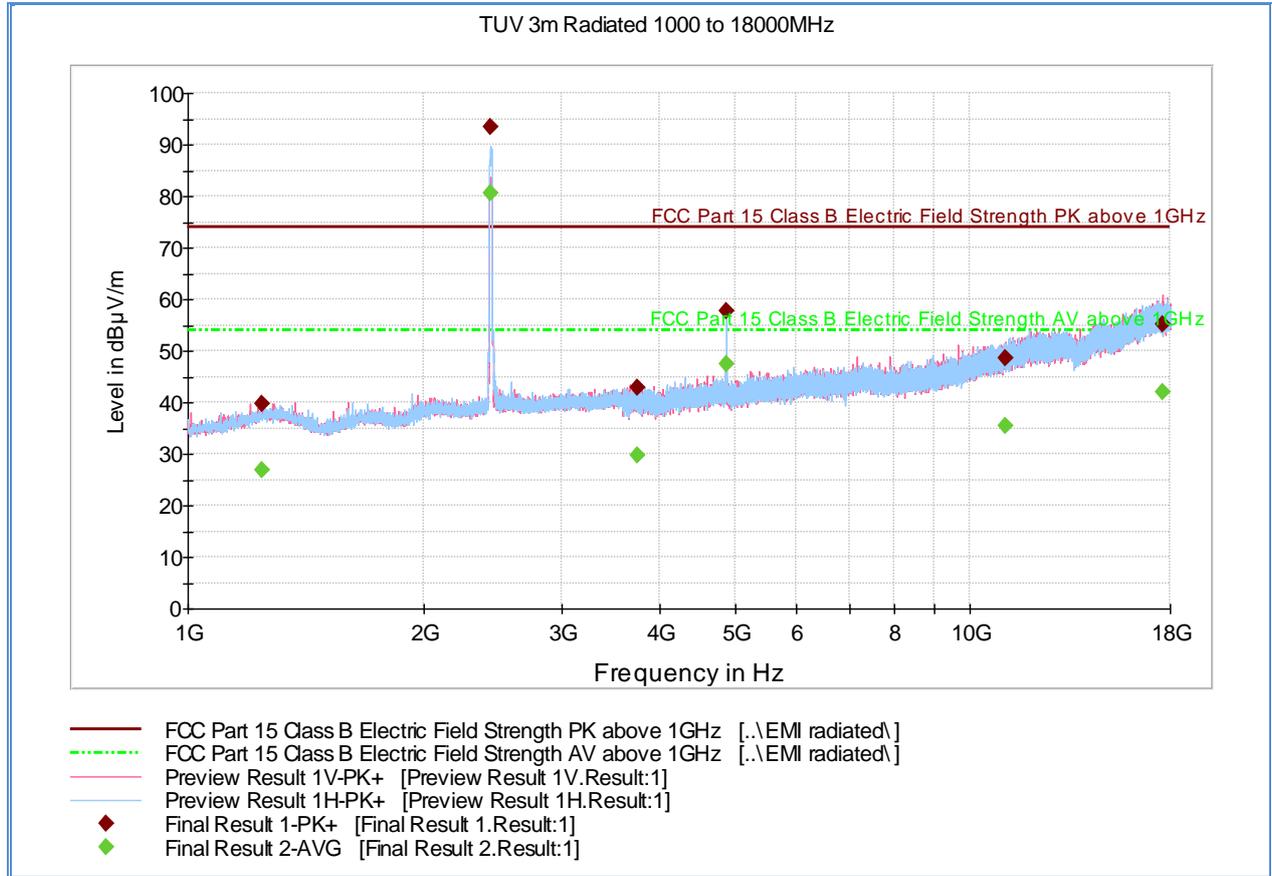

**Peak Data**

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
1244.533333	39.9	1000.0	1000.000	112.8	V	40.0	-4.8	34.0	73.9
2436.520000	93.5	1000.0	1000.000	101.9	H	186.0	-0.3	-19.6	73.9
3761.186667	42.9	1000.0	1000.000	281.3	V	219.0	2.9	31.0	73.9
4873.993333	57.8	1000.0	1000.000	111.9	H	186.0	5.2	16.1	73.9
11088.42666	48.7	1000.0	1000.000	102.9	V	111.0	14.6	25.2	73.9
17599.62666	55.1	1000.0	1000.000	99.8	V	246.0	22.1	18.8	73.9


**Average Data**

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
1244.533333	26.9	1000.0	1000.000	112.8	V	40.0	-4.8	27.0	53.9
2436.520000	80.5	1000.0	1000.000	101.9	H	186.0	-0.3	-26.6	53.9
3761.186667	29.7	1000.0	1000.000	281.3	V	219.0	2.9	24.2	53.9
4873.993333	47.6	1000.0	1000.000	111.9	H	186.0	5.2	6.3	53.9
11088.42666	35.4	1000.0	1000.000	102.9	V	111.0	14.6	18.5	53.9
17599.62666	42.1	1000.0	1000.000	99.8	V	246.0	22.1	11.8	53.9

**Test Notes:** 2436.52 MHz is part of fundamental measurement and not subjected to 15.209 and 15.205 limits. There are no emissions observed above 6GHz (noise floor measurements).



**2.7.19 Test Results Above 1GHz (High Channel - 802.11 b)**

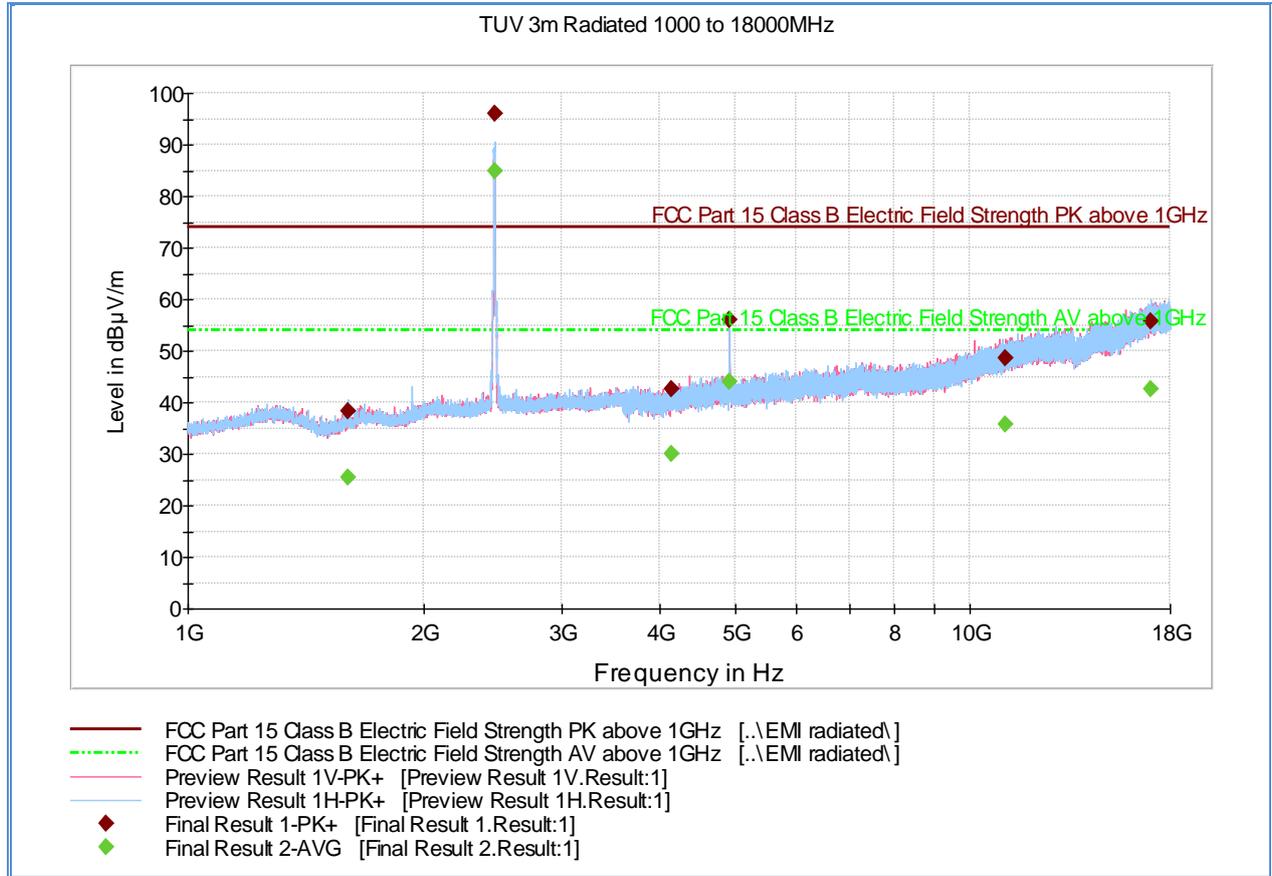

**Peak Data**

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
1599.553333	38.4	1000.0	1000.000	315.2	H	17.0	-4.3	35.5	73.9
2464.493333	95.9	1000.0	1000.000	102.9	H	186.0	-0.2	-22.0	73.9
4156.273333	42.4	1000.0	1000.000	180.6	V	123.0	3.7	31.5	73.9
4924.026667	55.9	1000.0	1000.000	103.8	H	189.0	5.2	18.0	73.9
11064.066666	48.6	1000.0	1000.000	133.8	V	268.0	14.6	25.3	73.9
17000.506666	55.7	1000.0	1000.000	99.8	H	284.0	22.0	18.2	73.9


**Average Data**

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
1599.553333	25.4	1000.0	1000.000	315.2	H	17.0	-4.3	28.5	53.9
2464.493333	84.9	1000.0	1000.000	102.9	H	186.0	-0.2	-30.9	53.9
4156.273333	29.9	1000.0	1000.000	180.6	V	123.0	3.7	24.0	53.9
4924.026667	43.9	1000.0	1000.000	103.8	H	189.0	5.2	10.0	53.9
11064.066666	35.6	1000.0	1000.000	133.8	V	268.0	14.6	18.3	53.9
17000.506666	42.5	1000.0	1000.000	99.8	H	284.0	22.0	11.4	53.9

**Test Notes:** 2464.49MHz is part of fundamental measurement and not subjected to 15.209 and 15.205 limits. There are no emissions observed above 10GHz (noise floor measurements).



2.7.20 Test Results Restricted Band (2483.5MHz to 2500MHz) 802.11 b

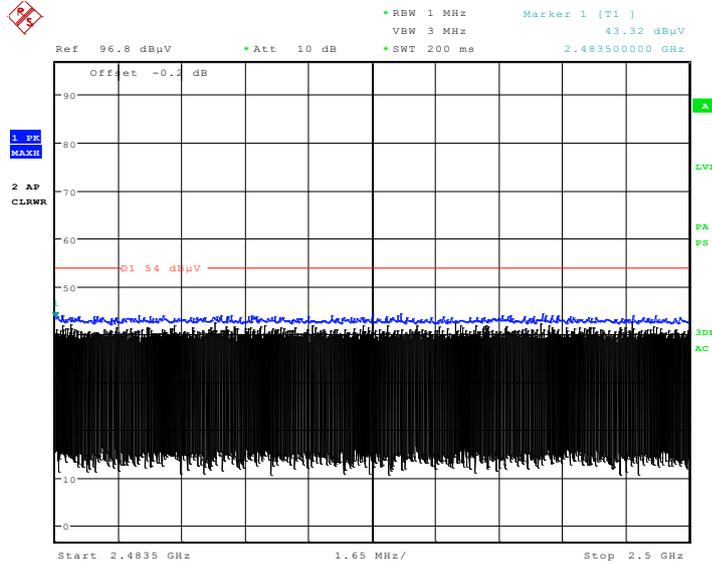


Date: 20.MAY.2013 07:00:05

**Test Notes:** Carrier frequency (High Channel) was maximized for this test. Correction factor of -0.2dB is from the cable, antenna and preamp used. Peak complies with Average limit therefore no Average measurement performed.



2.7.21 Test Results Above 1GHz (Low Channel - 802.11 g)

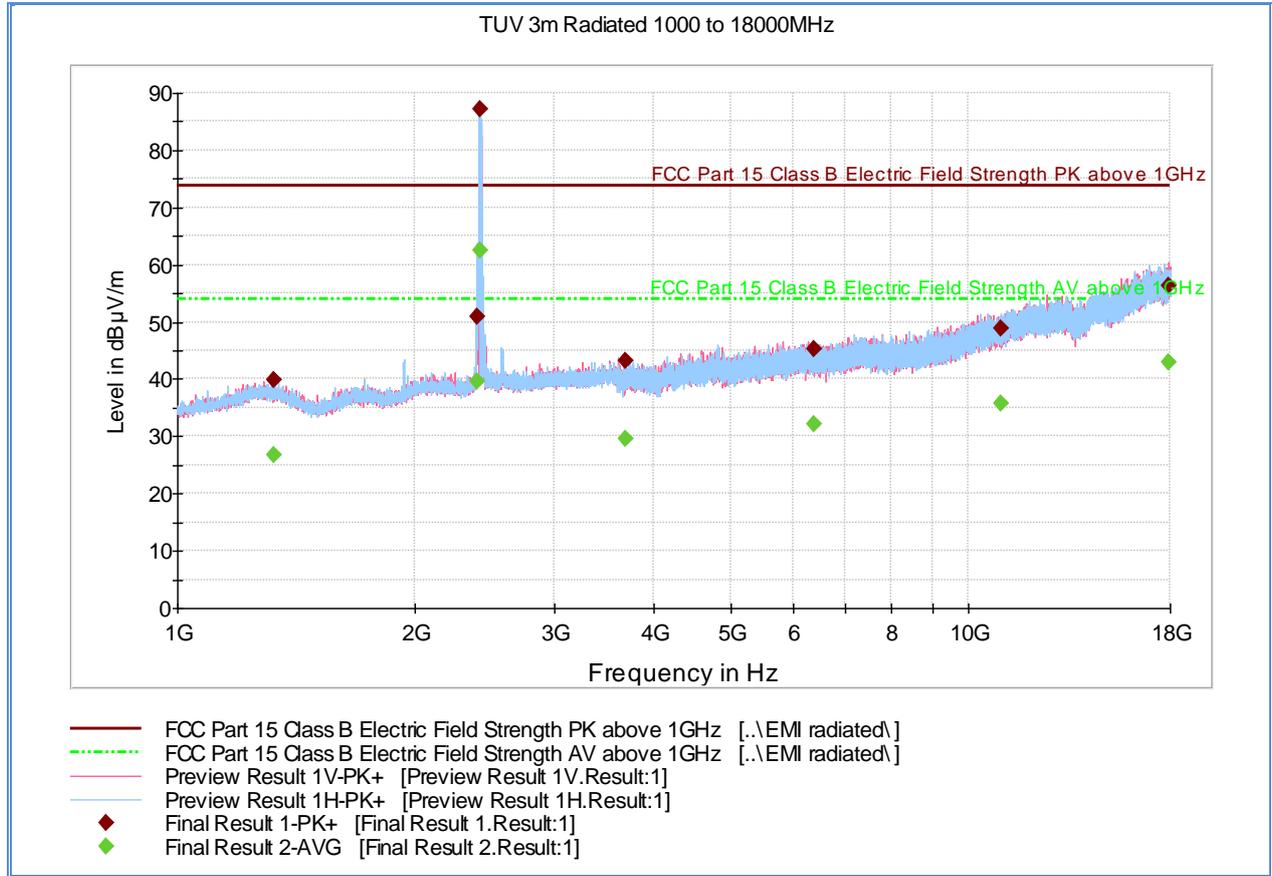

Peak Data


Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
1327.073333	39.8	1000.0	1000.000	305.2	H	357.0	-4.9	34.1	73.9
2415.760000	87.3	1000.0	1000.000	111.8	H	185.0	-0.4	-13.4	73.9
3690.193333	43.3	1000.0	1000.000	243.4	V	256.0	2.7	30.6	73.9
6395.126667	45.2	1000.0	1000.000	392.5	H	98.0	8.2	28.7	73.9
11016.26000	48.8	1000.0	1000.000	392.5	H	343.0	14.5	25.1	73.9
17955.85333	56.2	1000.0	1000.000	358.1	V	237.0	22.6	17.7	73.9

Average Data

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
1327.073333	26.8	1000.0	1000.000	305.2	H	357.0	-4.9	27.1	53.9
2415.760000	62.4	1000.0	1000.000	111.8	H	185.0	-0.4	-8.5	53.9
3690.193333	29.6	1000.0	1000.000	243.4	V	256.0	2.7	24.3	53.9
6395.126667	32.2	1000.0	1000.000	392.5	H	98.0	8.2	21.7	53.9
11016.26000	35.7	1000.0	1000.000	392.5	H	343.0	14.5	18.2	53.9
17955.85333	43.1	1000.0	1000.000	358.1	V	237.0	22.6	10.8	53.9

**Test Notes:** 2415.76MHz is part of fundamental measurement and not subjected to 15.209 and 15.205 limits. There are no emissions observed above 10GHz (noise floor measurements).

### 2.7.22 Test Results Lower Band Edge 802.11 g

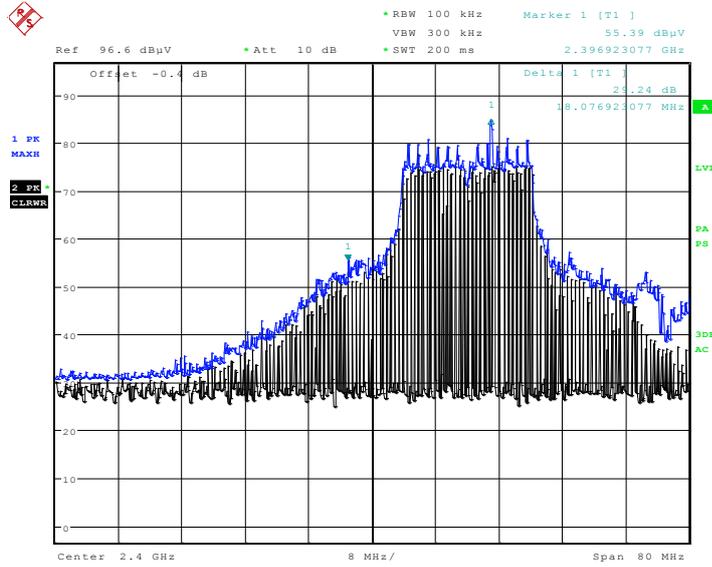


Date: 20.MAY.2013 07:23:24

**Test Notes:** Carrier frequency (Low Channel) was maximized for this test. Correction factor of -0.4dB is from the cable, antenna and preamp used. Limit for this test is 20dBc.



**2.7.23 Test Results Restricted Band (2310 MHz to 2390 MHz) 802.11 g**

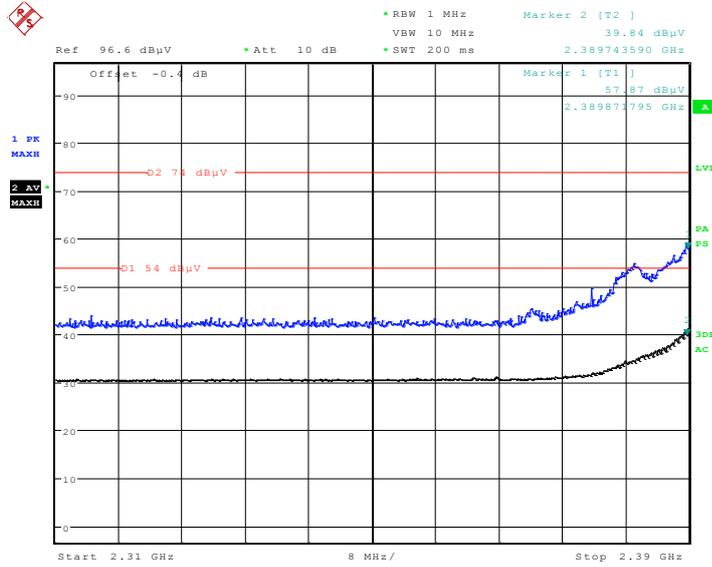


Date: 20.MAY.2013 07:20:51

**Test Notes:** Carrier frequency (Low Channel) was maximized for this test. Correction factor of -0.4dB is from the cable, antenna and preamp used. Peak and Average plots presented with corresponding 15.209 limits.



2.7.24 Test Results Above 1GHz 802.11 g (Mid Channel)

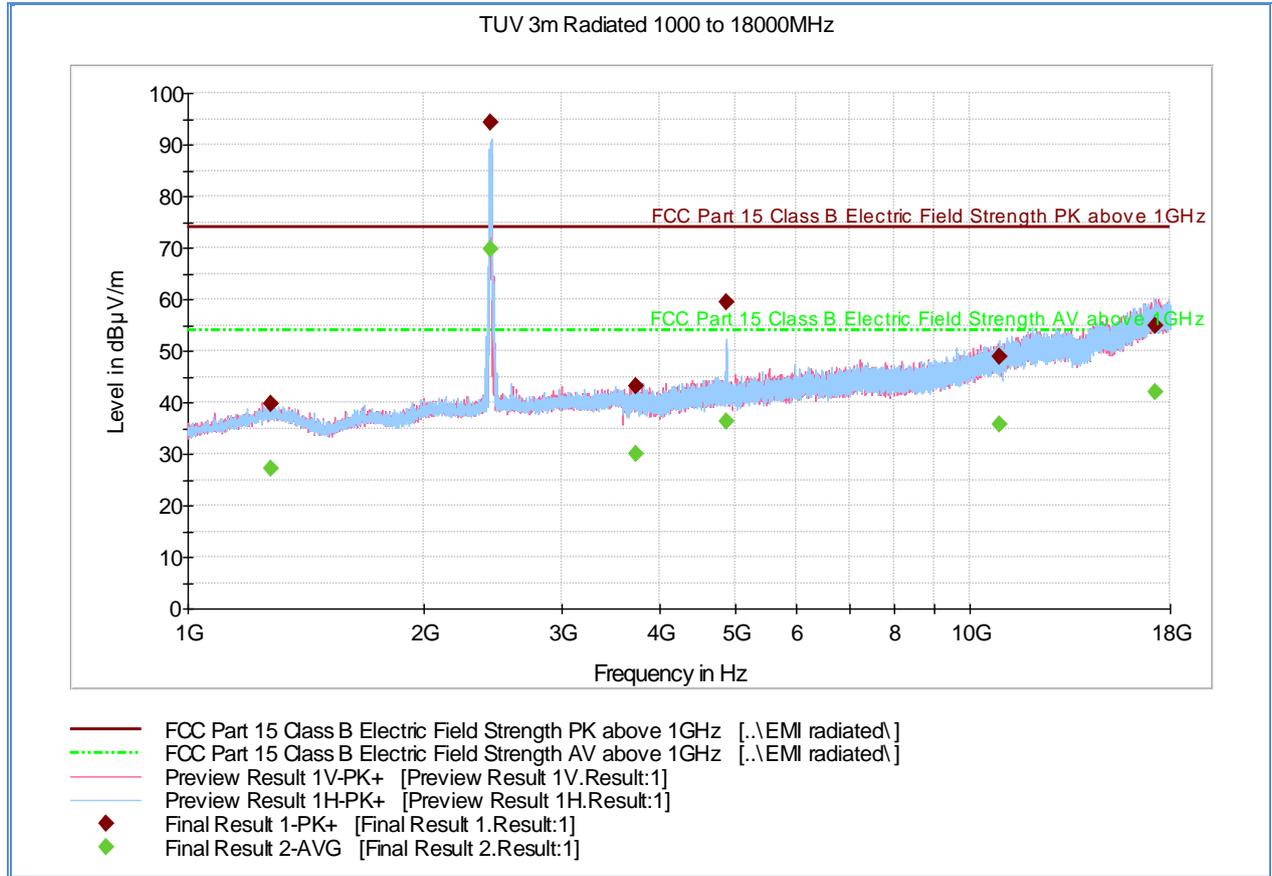

Peak Data

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
1275.053333	39.8	1000.0	1000.000	101.9	H	186.0	-4.8	34.1	73.9
2441.986667	94.4	1000.0	1000.000	99.8	H	186.0	-0.3	-20.5	73.9
3731.393333	43.1	1000.0	1000.000	179.6	H	32.0	3.0	30.8	73.9
4873.993333	59.4	1000.0	1000.000	100.9	H	186.0	5.2	14.5	73.9
10880.18000	48.8	1000.0	1000.000	375.7	H	324.0	14.2	25.1	73.9
17193.76666	54.9	1000.0	1000.000	339.2	H	265.0	21.7	19.0	73.9


Average Data

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
1275.053333	27.1	1000.0	1000.000	101.9	H	186.0	-4.8	26.8	53.9
2441.986667	69.6	1000.0	1000.000	99.8	H	186.0	-0.3	-15.7	53.9
3731.393333	30.0	1000.0	1000.000	179.6	H	32.0	3.0	23.9	53.9
4873.993333	36.3	1000.0	1000.000	100.9	H	186.0	5.2	17.6	53.9
10880.18000	35.8	1000.0	1000.000	375.7	H	324.0	14.2	18.1	53.9
17193.76666	42.1	1000.0	1000.000	339.2	H	265.0	21.7	11.8	53.9

**Test Notes:** 2441.98MHz is part of fundamental measurement and not subjected to 15.209 and 15.205 limits. There are no emissions observed above 10GHz (noise floor measurements).



2.7.25 Test Results Above 1GHz 802.11 g (High Channel)

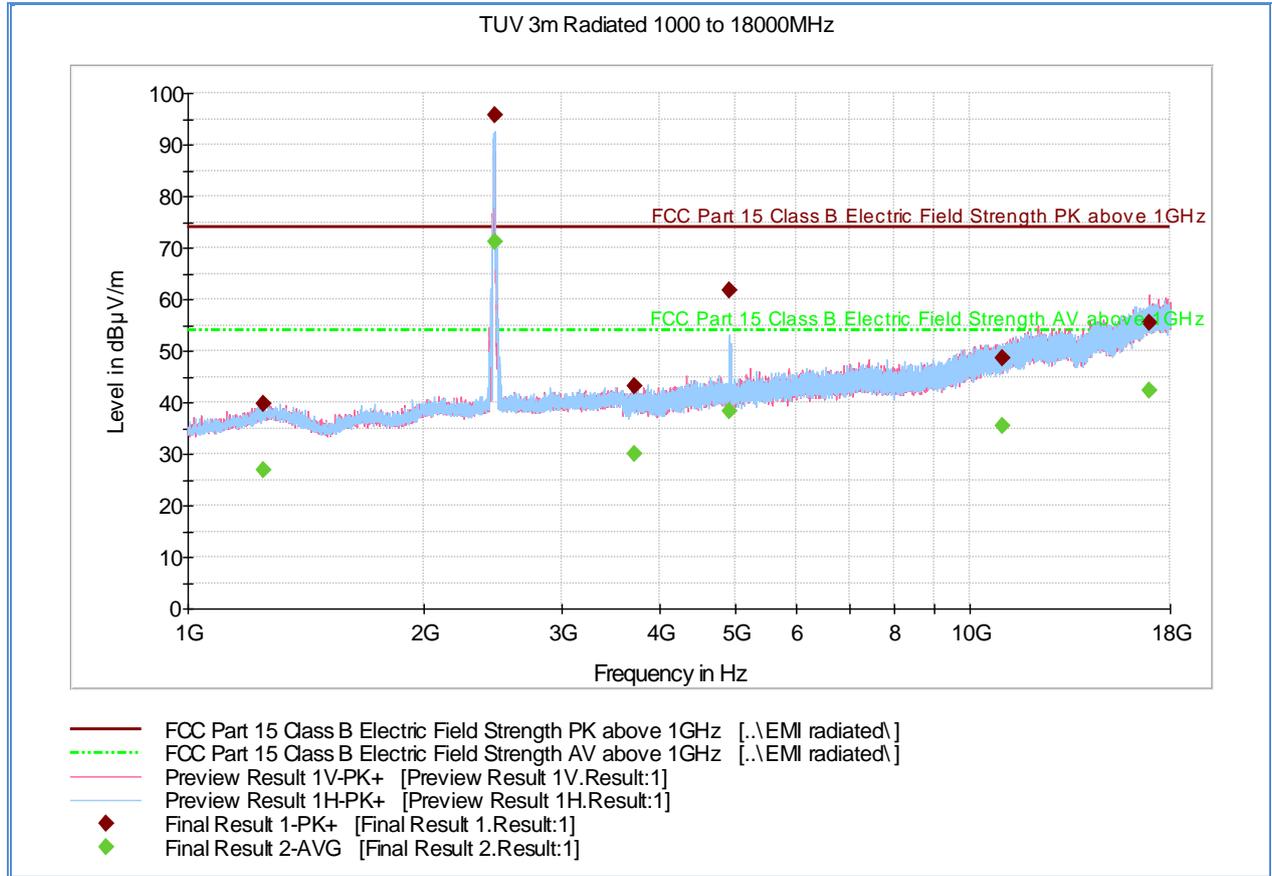

Peak Data


Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
1251.220000	39.7	1000.0	1000.000	324.2	V	214.0	-4.7	34.2	73.9
2468.260000	95.7	1000.0	1000.000	99.8	H	267.0	-0.2	-21.8	73.9
3721.520000	43.3	1000.0	1000.000	358.2	H	51.0	3.0	30.6	73.9
4926.213333	61.8	1000.0	1000.000	102.9	H	258.0	5.2	12.1	73.9
10998.50000	48.5	1000.0	1000.000	196.6	H	230.0	14.5	25.4	73.9
16963.86000	55.4	1000.0	1000.000	360.1	V	319.0	21.9	18.5	73.9

Average Data

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
1251.220000	27.0	1000.0	1000.000	324.2	V	214.0	-4.7	26.9	53.9
2468.260000	71.1	1000.0	1000.000	99.8	H	267.0	-0.2	-17.2	53.9
3721.520000	30.1	1000.0	1000.000	358.2	H	51.0	3.0	23.8	53.9
4926.213333	38.4	1000.0	1000.000	102.9	H	258.0	5.2	15.5	53.9
10998.50000	35.5	1000.0	1000.000	196.6	H	230.0	14.5	18.4	53.9
16963.86000	42.2	1000.0	1000.000	360.1	V	319.0	21.9	11.7	53.9

**Test Notes:** 2468.26MHz is part of fundamental measurement and not subjected to 15.209 and 15.205 limits. There are no emissions observed above 10GHz (noise floor measurements).

2.7.26 Test Results Restricted Band (2483.5MHz to 2500MHz) 802.11 g

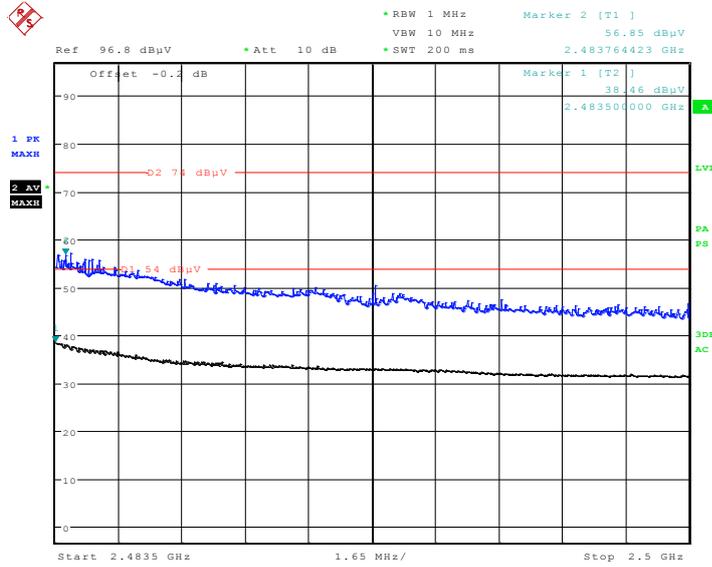


Date: 20.MAY.2013 07:06:23

**Test Notes:** Carrier frequency (High Channel) was maximized for this test. Correction factor of -0.2dB is from the cable, antenna and preamp used. Peak and Average plots presented with corresponding 15.209 limits.



2.7.27 Test Results Above 1GHz 802.11 a (Low Channel)

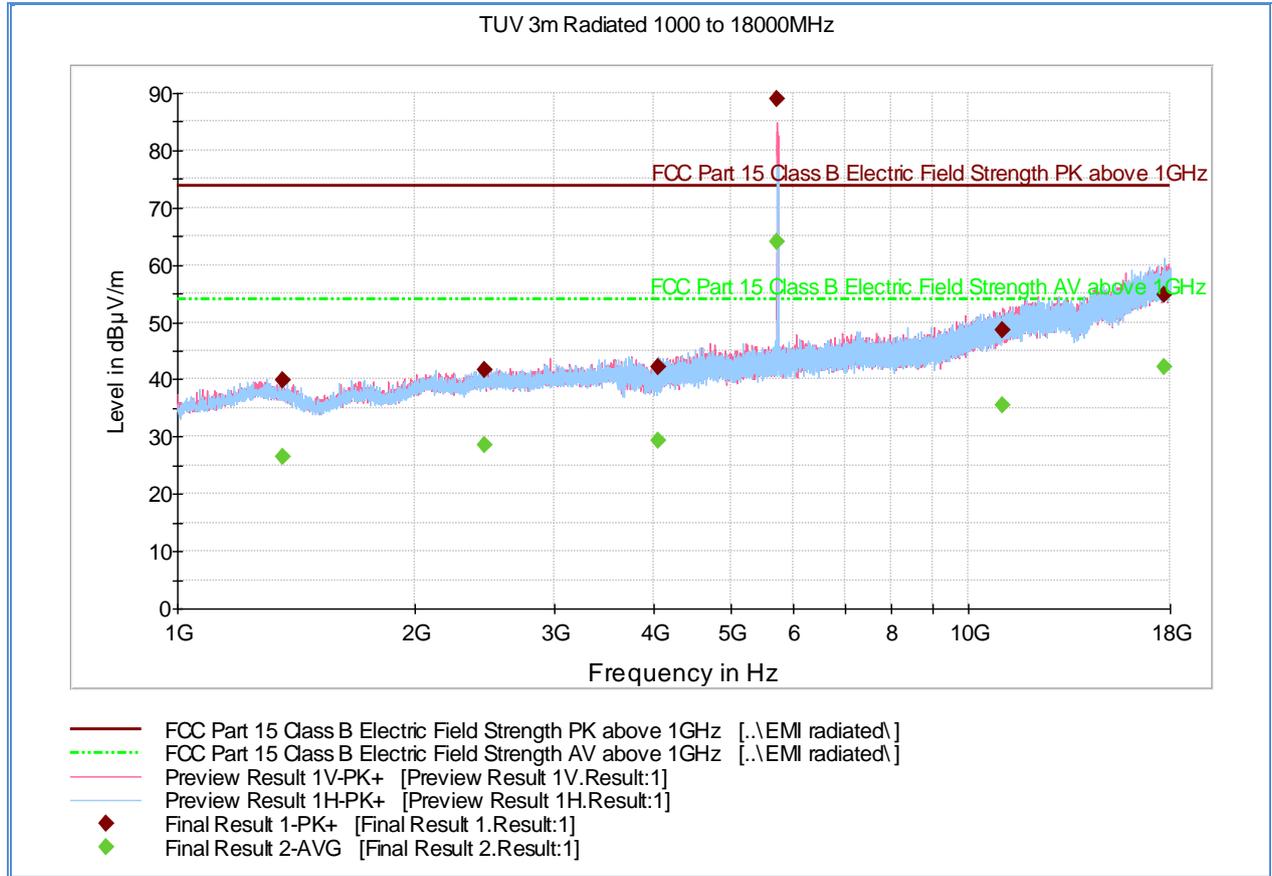

Peak Data

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
1357.833333	39.9	1000.0	1000.000	258.4	H	309.0	-4.9	34.0	73.9
2447.900000	41.7	1000.0	1000.000	204.5	V	123.0	-0.3	32.2	73.9
4061.393333	42.2	1000.0	1000.000	178.7	H	325.0	3.7	31.7	73.9
5737.553333	89.0	1000.0	1000.000	118.8	V	208.0	7.8	-15.1	73.9
11042.00666	48.6	1000.0	1000.000	387.0	V	176.0	14.6	25.3	73.9
17679.74000	54.7	1000.0	1000.000	387.0	H	73.0	22.1	19.2	73.9


Average Data

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
1357.833333	26.5	1000.0	1000.000	258.4	H	309.0	-4.9	27.4	53.9
2447.900000	28.6	1000.0	1000.000	204.5	V	123.0	-0.3	25.3	53.9
4061.393333	29.3	1000.0	1000.000	178.7	H	325.0	3.7	24.6	53.9
5737.553333	64.0	1000.0	1000.000	118.8	V	208.0	7.8	-10.1	53.9
11042.00666	35.6	1000.0	1000.000	387.0	V	176.0	14.6	18.3	53.9
17679.74000	42.3	1000.0	1000.000	387.0	H	73.0	22.1	11.6	53.9

**Test Notes:** Test Notes: 5737.55MHz is part of fundamental measurement and not subjected to 15.209 and 15.205 limits. There are no emissions observed above 10GHz (noise floor measurements).



2.7.28 Test Results Lower Band Edge 802.11 a

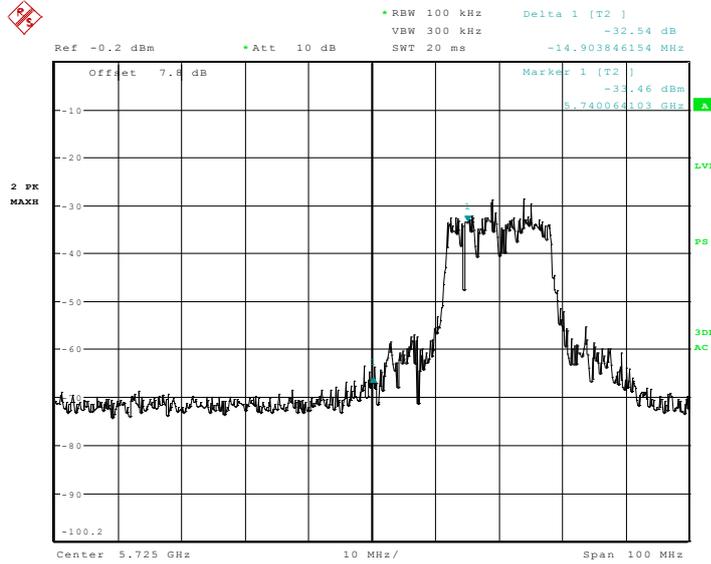


Date: 16.MAY.2013 19:01:53

**Test Notes:** Carrier frequency (Low Channel) was maximized for this test. Correction factor of 7.8dB is from the cable, antenna and preamp used. Limit for this test is 20dBc.



2.7.29 Test Results Above 1GHz 802.11 a (Mid Channel)

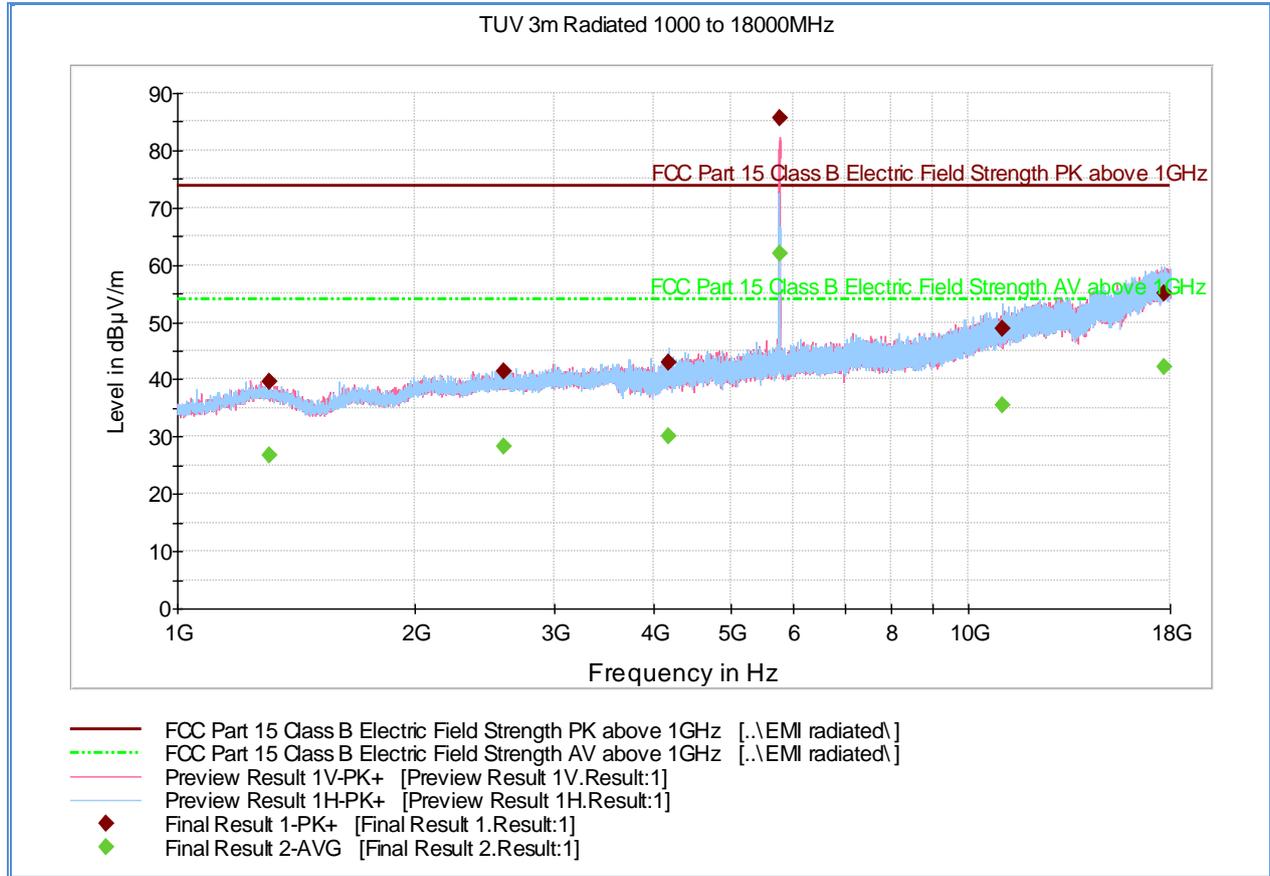

Peak Data

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
1308.653333	39.7	1000.0	1000.000	387.0	V	289.0	-4.8	34.2	73.9
2586.560000	41.3	1000.0	1000.000	243.4	V	161.0	0.3	32.6	73.9
4176.840000	43.1	1000.0	1000.000	120.8	H	61.0	3.7	30.9	73.9
5772.526667	85.7	1000.0	1000.000	119.8	V	217.0	7.8	-11.8	73.9
11059.486666	48.8	1000.0	1000.000	140.8	H	54.0	14.6	25.1	73.9
17668.886666	55.0	1000.0	1000.000	280.3	H	264.0	22.1	18.9	73.9


Average Data

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
1308.653333	26.9	1000.0	1000.000	387.0	V	289.0	-4.8	27.0	53.9
2586.560000	28.3	1000.0	1000.000	243.4	V	161.0	0.3	25.6	53.9
4176.840000	30.0	1000.0	1000.000	120.8	H	61.0	3.7	23.9	53.9
5772.526667	62.0	1000.0	1000.000	119.8	V	217.0	7.8	-8.1	53.9
11059.486666	35.6	1000.0	1000.000	140.8	H	54.0	14.6	18.3	53.9
17668.886666	42.3	1000.0	1000.000	280.3	H	264.0	22.1	11.6	53.9

**Test Notes:** 5772MHz is part of fundamental measurement and not subjected to 15.209 and 15.205 limits. There are no emissions observed above 10GHz (noise floor measurements).



**2.7.30 Test Results Above 1GHz 802.11 a (High Channel)**

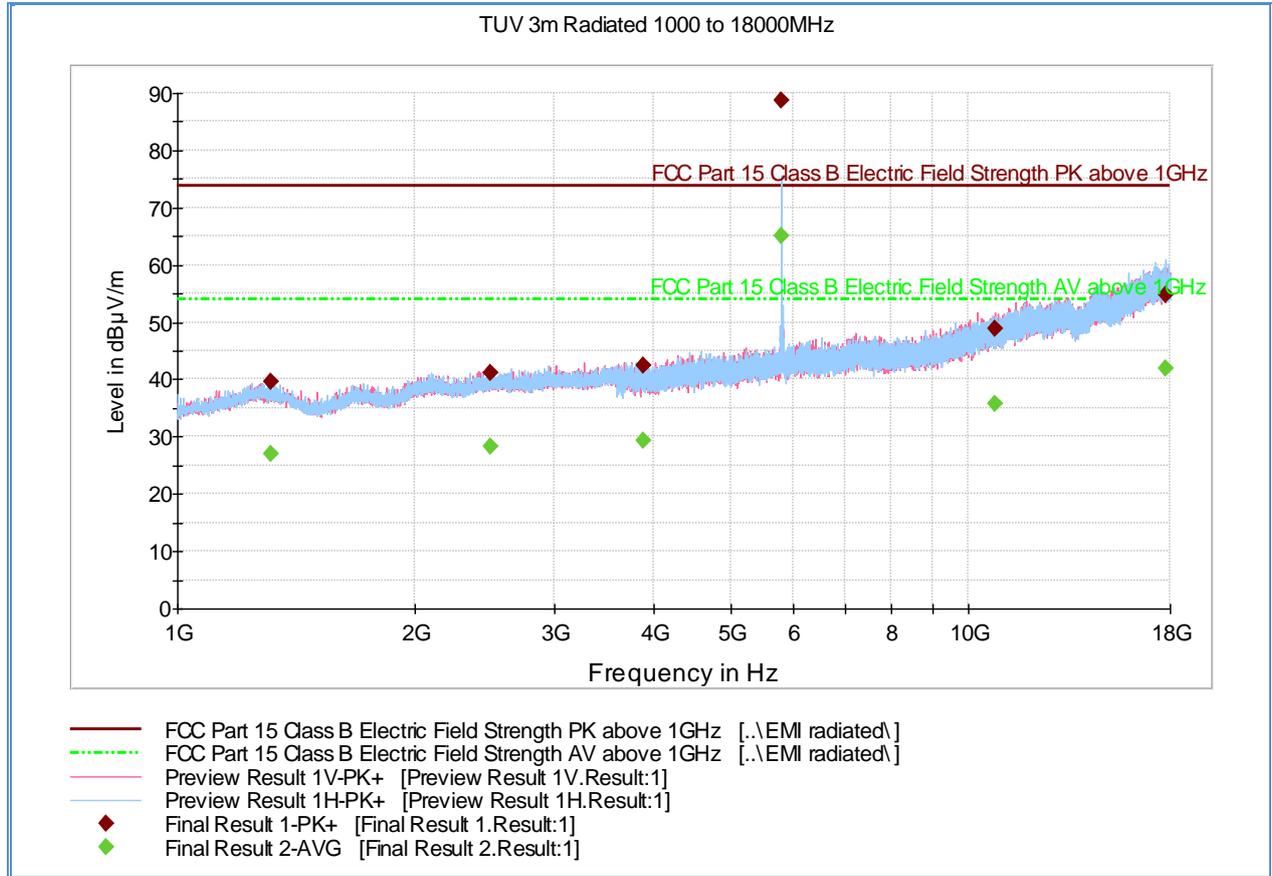

**Peak Data**


Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
1313.426667	39.6	1000.0	1000.000	387.0	V	321.0	-4.9	34.3	73.9
2484.480000	41.1	1000.0	1000.000	233.4	V	87.0	-0.2	32.8	73.9
3890.300000	42.3	1000.0	1000.000	155.7	H	350.0	3.2	31.6	73.9
5802.526667	88.7	1000.0	1000.000	187.6	H	262.0	7.9	-14.8	73.9
10806.560000	48.8	1000.0	1000.000	259.4	V	359.0	13.9	25.1	73.9
17747.493333	54.7	1000.0	1000.000	387.0	H	25.0	22.1	19.2	73.9

**Average Data**

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
1313.426667	26.9	1000.0	1000.000	387.0	V	321.0	-4.9	27.0	53.9
2484.480000	28.4	1000.0	1000.000	233.4	V	87.0	-0.2	25.5	53.9
3890.300000	29.4	1000.0	1000.000	155.7	H	350.0	3.2	24.5	53.9
5802.526667	65.1	1000.0	1000.000	187.6	H	262.0	7.9	-11.2	53.9
10806.560000	35.7	1000.0	1000.000	259.4	V	359.0	13.9	18.2	53.9
17747.493333	41.9	1000.0	1000.000	387.0	H	25.0	22.1	12.0	53.9

**Test Notes:** 5802.5 MHz is part of fundamental measurement and not subjected to 15.209 and 15.205 limits. There are no emissions observed above 10GHz (noise floor measurements).

### 2.7.31 Test Results Upper Band Edge 802.11 a

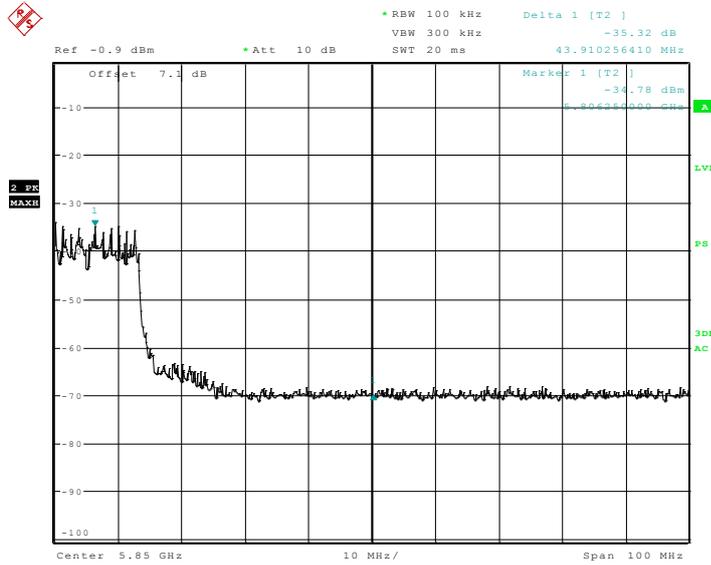

Date: 16.MAY.2013 18:53:31

**Test Notes:** Carrier frequency (High Channel) was maximized for this test. Correction factor of 7.1dB is from the cable, antenna and preamp used. Limit for this test is 20dBc.



## **2.8 POWER SPECTRAL DENSITY**

### **2.8.1 Specification Reference**

Part 15 Subpart C §15.247(e)

### **2.8.2 Standard Applicable**

(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### **2.8.3 Equipment Under Test and Modification State**

Serial No: N/A / Test Configuration B

### **2.8.4 Date of Test/Initial of test personnel who performed the test**

September 9, 2012/FSC

### **2.8.5 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.8.6 Environmental Conditions**

Ambient Temperature	23.2°C
Relative Humidity	50.5%
ATM Pressure	99.1 kPa

### **2.8.7 Additional Observations**


- This is a conducted test.
- Test procedure is per Section 5.3.1 of KDB 558074 (January 18, 2012).
- An offset of 10.9dB was added to compensate for the external attenuator and cable used.
- Detector is Peak.
- Trace mode is Max Hold.
- Sweep time is Auto Couple.
- Bandwidth Correction Factor BWCF is from  $10\log(3\text{kHz}/100\text{kHz})$ .



**2.8.8 Test Results Summary**

Mode	Channel	Marker Reading (dBm)	Bandwidth Correction Factor (BWCF)	PSD Level (dBm)	Limit (dBm)	Compliance
802.11b	1 (2412 MHz)	-12.31	15.228	-27.538	8	Complies
	6 (2437 MHz)	-13.08	15.228	-28.308	8	Complies
	11 (2462 MHz)	-13.52	15.228	-28.748	8	Complies
802.11g	1 (2412 MHz)	-12.57	15.228	-27.798	8	Complies
	6 (2437 MHz)	-12.83	15.228	-28.058	8	Complies
	11 (2462 MHz)	-12.80	15.228	-28.028	8	Complies
802.11a	149 (5745 MHz)	-29.46	15.228	-44.688	8	Complies
	153 (5765 MHz)	-29.96	15.228	-45.188	8	Complies
	161 (5805 MHz)	-33.14	15.228	-48.368	8	Complies

**2.8.9 Test Results Plots**

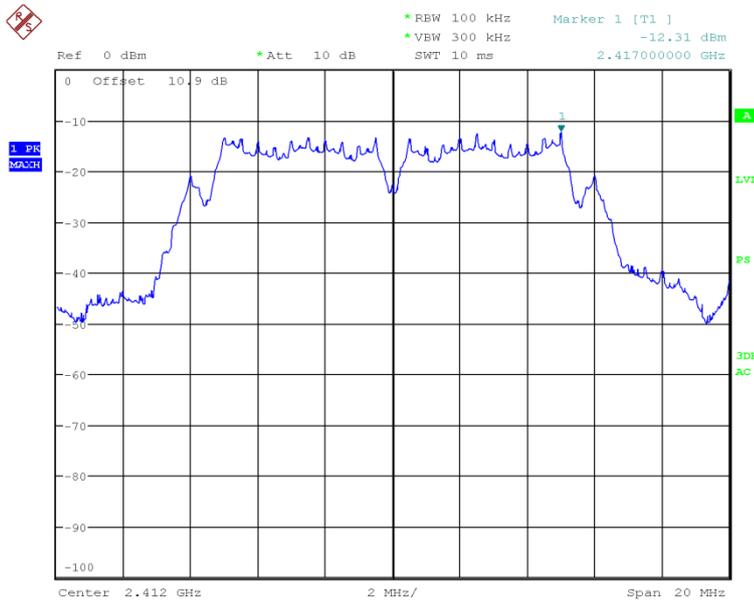


Date: 9.SEP.2012 09:45:14

**802.11 b Low Channel**




Date: 9.SEP.2012 09:46:21

### 802.11 b Mid Channel

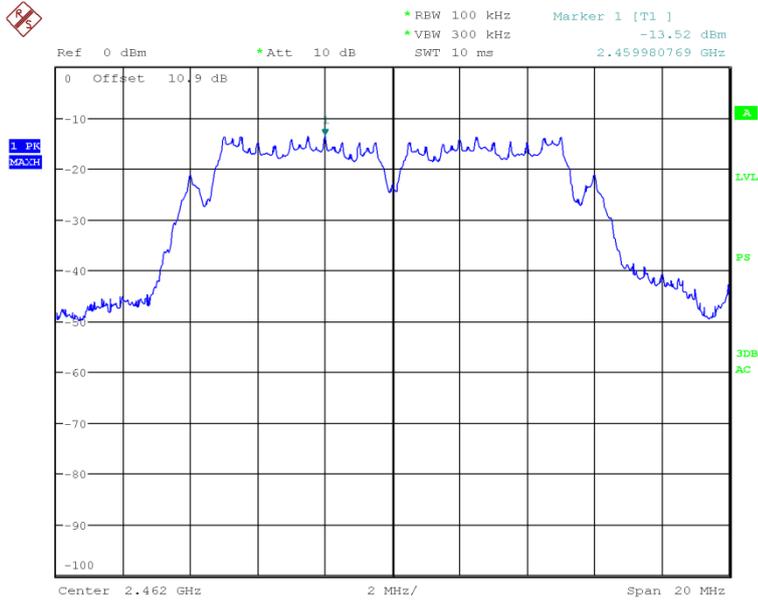


Date: 9.SEP.2012 09:47:37

### 802.11 b High Channel

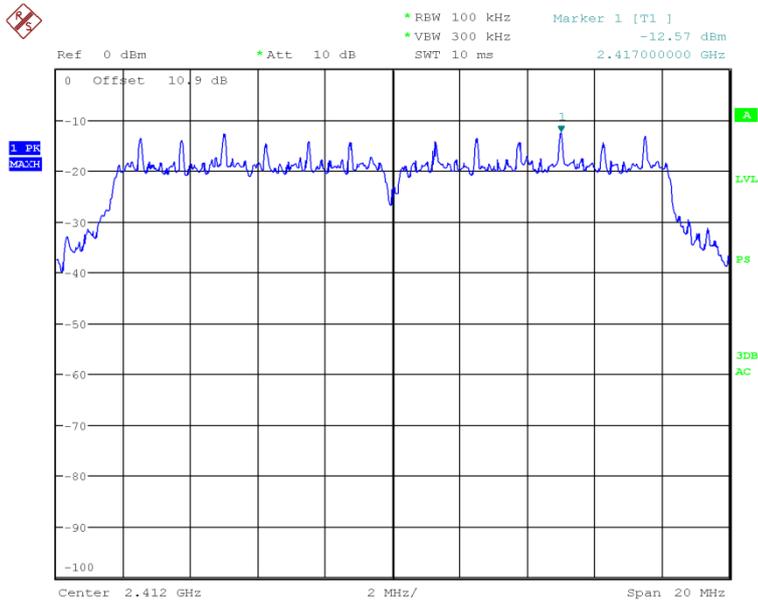


Date: 9.SEP.2012 09:48:22

### 802.11 g Low Channel

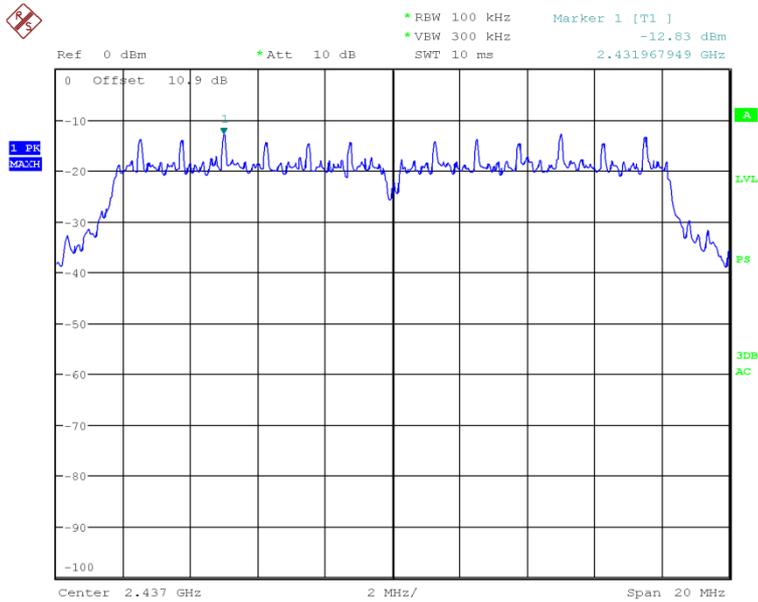


Date: 9.SEP.2012 09:50:01

### 802.11 g Mid Channel

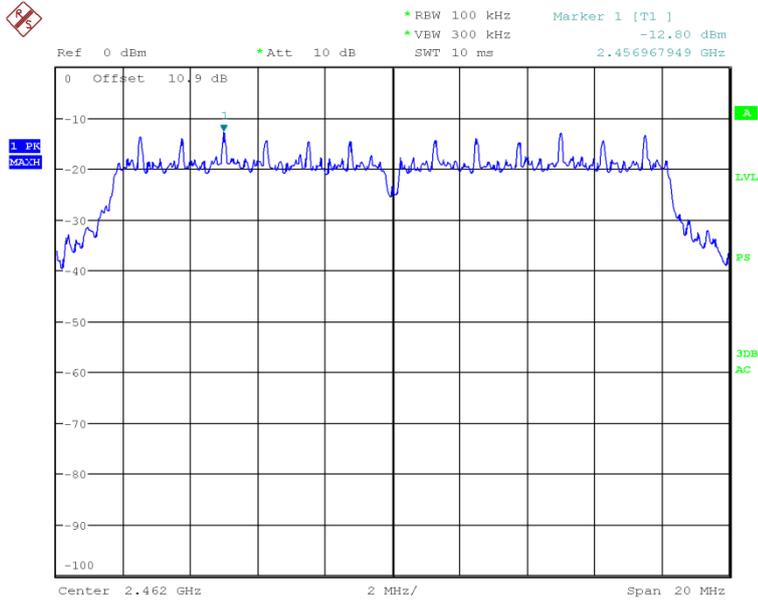


Date: 9.SEP.2012 09:50:49

### 802.11 g High Channel

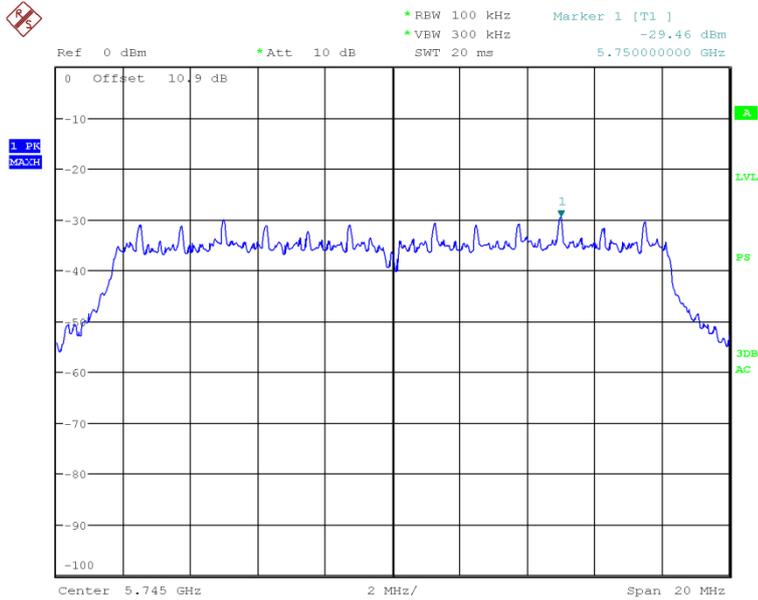


Date: 9.SEP.2012 09:52:16

### 802.11 a Low Channel

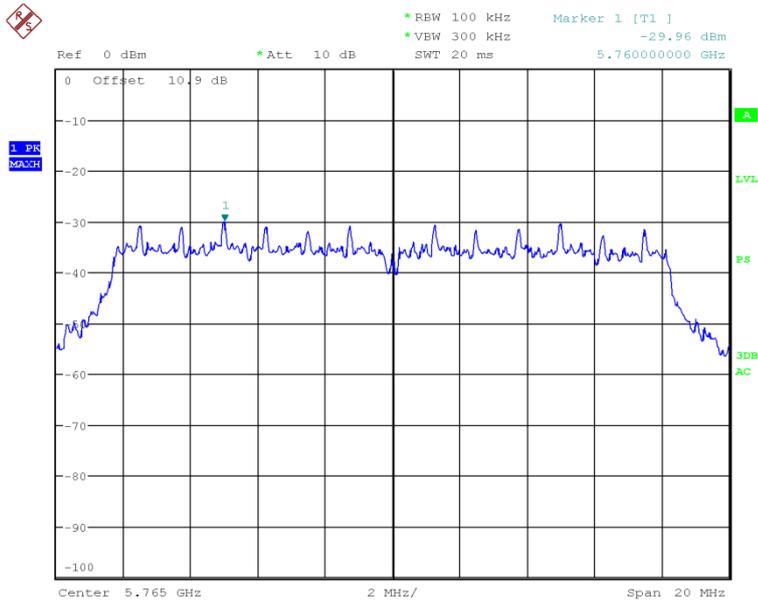

Date: 9.SEP.2012 09:54:26

### 802.11 a Mid Channel

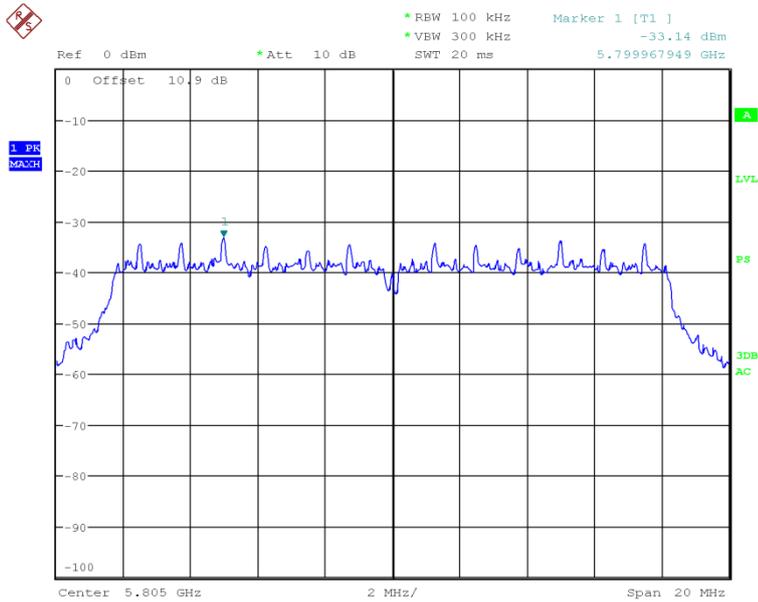

Date: 9.SEP.2012 09:55:33

### 802.11 a High Channel



### **SECTION 3**

#### **TEST EQUIPMENT USED**



### 3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

ID Number (SDGE/SDRB)	Test Equipment	Type	Serial Number	Manufacturer	Cal Date	Cal Due Date
Conducted Port Setup						
1049	EMI Test Receiver	ESU	100133	Rhode & Schwarz	06/13/12	06/13/13
7569	Series Power Meter	N1911A P-	MY45100625	Agilent	02/24/12	02/24/14
7570	50MHz-18GHz Wideband Power Sensor	N1921A	MY45240588	Agilent	02/14/12	02/24/13
Radiated Test Setup						
1033	Bilog Antenna	3142C	00044556	EMCO	05/23/12	05/23/13
7575	Double-ridged waveguide horn antenna	3117	00155511	EMCO	03/25/13	03/25/14
8628	Pre-amplifier	QLJ 01182835-JO	8986002	QuinStar Technologies Inc.	09/21/12	09/21/13
1153	High-frequency cable	SucoFlex 100 SX	N/A	Suhner	09/21/12	09/21/13
8543	High-frequency cable	Micropore 19057793	N/A	United Microwave Products	09/21/12	09/21/13
1040	EMI Test Receiver	ESIB40	100292	Rhode & Schwarz	08/10/12	08/10/13
1049	EMI Test Receiver	ESU	100133	Rhode & Schwarz	06/13/12	06/13/13
1016	Pre-amplifier	PAM-0202	187	PAM	08/17/12	08/17/13
1150	Horn antenna	RA42-K-F-4B-C	012054-004	CMT	Verified by 1003 and 1049	
1151	Pre-amplifier	TS-PR26	100026	Rhode & Schwarz	Verified by 1003 and 1049	
Miscellaneous						
	Test Software	EMC32	V8.53	Rhode & Schwarz	N/A	
1003	Signal Generator	SMR-40	1104.0002.40	Rhode & Schwarz	11/12/12	11/12/13
6452	Multimeter	3478A	2911A52177	Hewlett Packard	07/16/12	07/16/13
7560	Barometer/Temperature /Humidity Transmitter	iBTHX-W	1240476	Omega	11/19/12	11/19/13
7539	DC Power Supply	6434B	1140A01866	Hewlett Packard	Verified by 6452	



### 3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:

#### 3.2.1 Radiated Emission Measurements (Below 1GHz)

Contribution		Probability Distribution Type	Probability Distribution $x_i$	Standard Uncertainty $u(x_i)$	$[u(x_i)]^2$
1	Receiver/Spectrum Analyzer	Rectangular	0.45	0.26	0.07
2	Cables	Rectangular	0.50	0.29	0.08
3	Preamp	Rectangular	0.50	0.29	0.08
4	Antenna	Rectangular	0.75	0.43	0.19
5	Site	Rectangular	3.89	2.25	5.04
6	EUT Setup	Rectangular	1.00	0.58	0.33
Combined Uncertainty ( $u_c$ ):					2.41
Coverage Factor (k):					2
Expanded Uncertainty:					4.82

#### 3.2.2 Radiated Emission Measurements (Above 1GHz)

Contribution		Probability Distribution Type	Probability Distribution $x_i$	Standard Uncertainty $u(x_i)$	$[u(x_i)]^2$
1	Receiver/Spectrum Analyzer	Rectangular	0.57	0.33	0.11
2	Cables	Rectangular	0.70	0.40	0.16
3	Preamp	Rectangular	0.50	0.29	0.08
4	Antenna	Rectangular	0.37	0.21	0.05
5	Site	Rectangular	3.89	2.25	5.04
6	EUT Setup	Rectangular	1.00	0.58	0.33
Combined Uncertainty ( $u_c$ ):					2.40
Coverage Factor (k):					2
Expanded Uncertainty:					4.81

#### 3.2.3 Conducted Antenna Port Measurement


Contribution		Probability Distribution Type	Probability Distribution $x_i$	Standard Uncertainty $u(x_i)$	$[u(x_i)]^2$
1	Receiver/Spectrum Analyzer	Rectangular	0.57	0.33	0.11
2	Cables	Rectangular	0.50	0.29	0.08
3	EUT Setup	Rectangular	1.00	0.58	0.33
Combined Uncertainty ( $u_c$ ):					0.72
Coverage Factor (k):					2
Expanded Uncertainty:					1.45




## SECTION 4

### DIAGRAM OF TEST SETUP

#### 4.1 TEST SETUP DIAGRAM

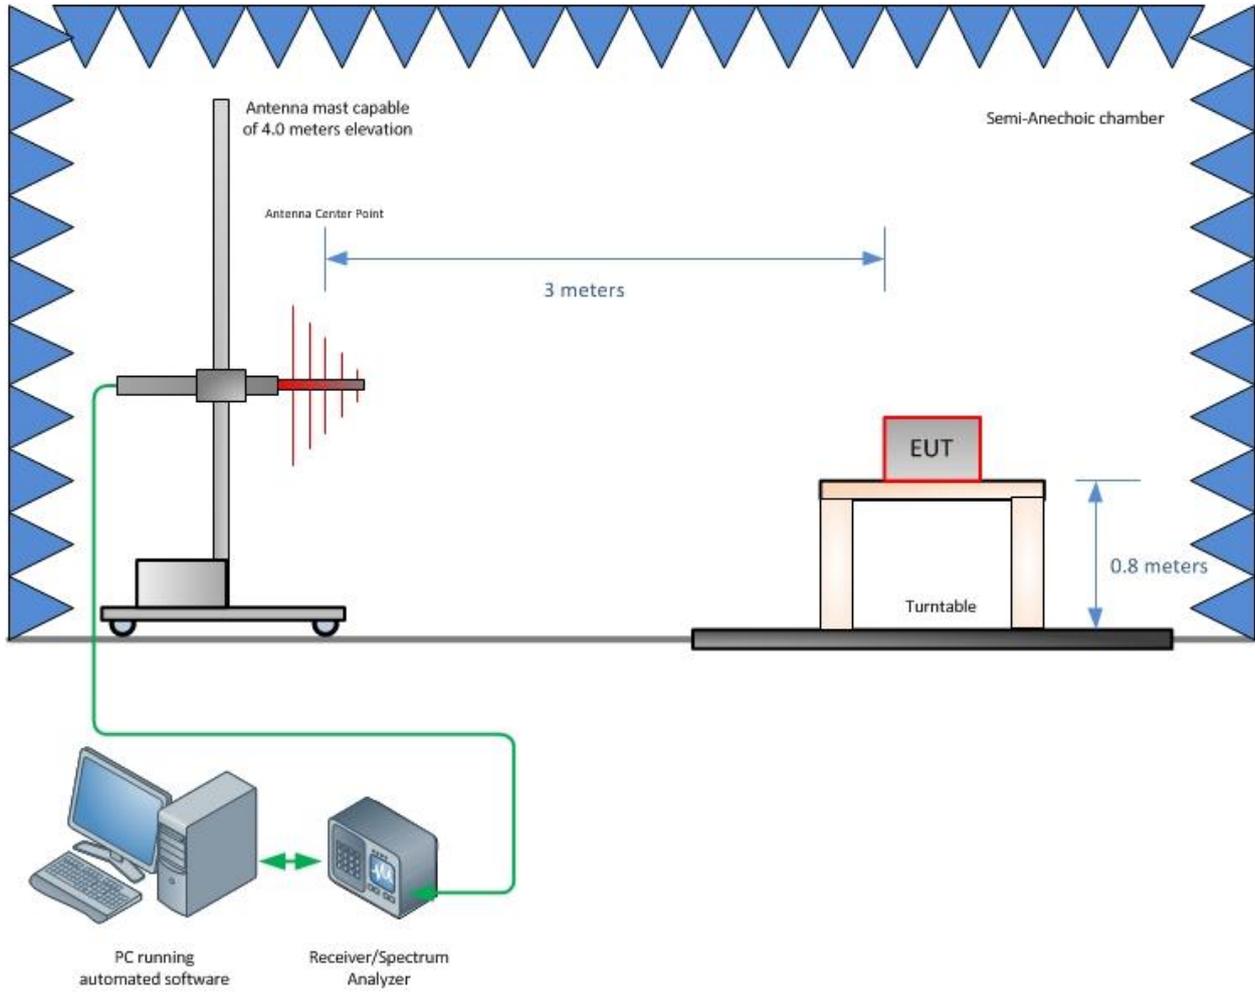

**Radiated Emission Test Setup (Below 1GHz)**

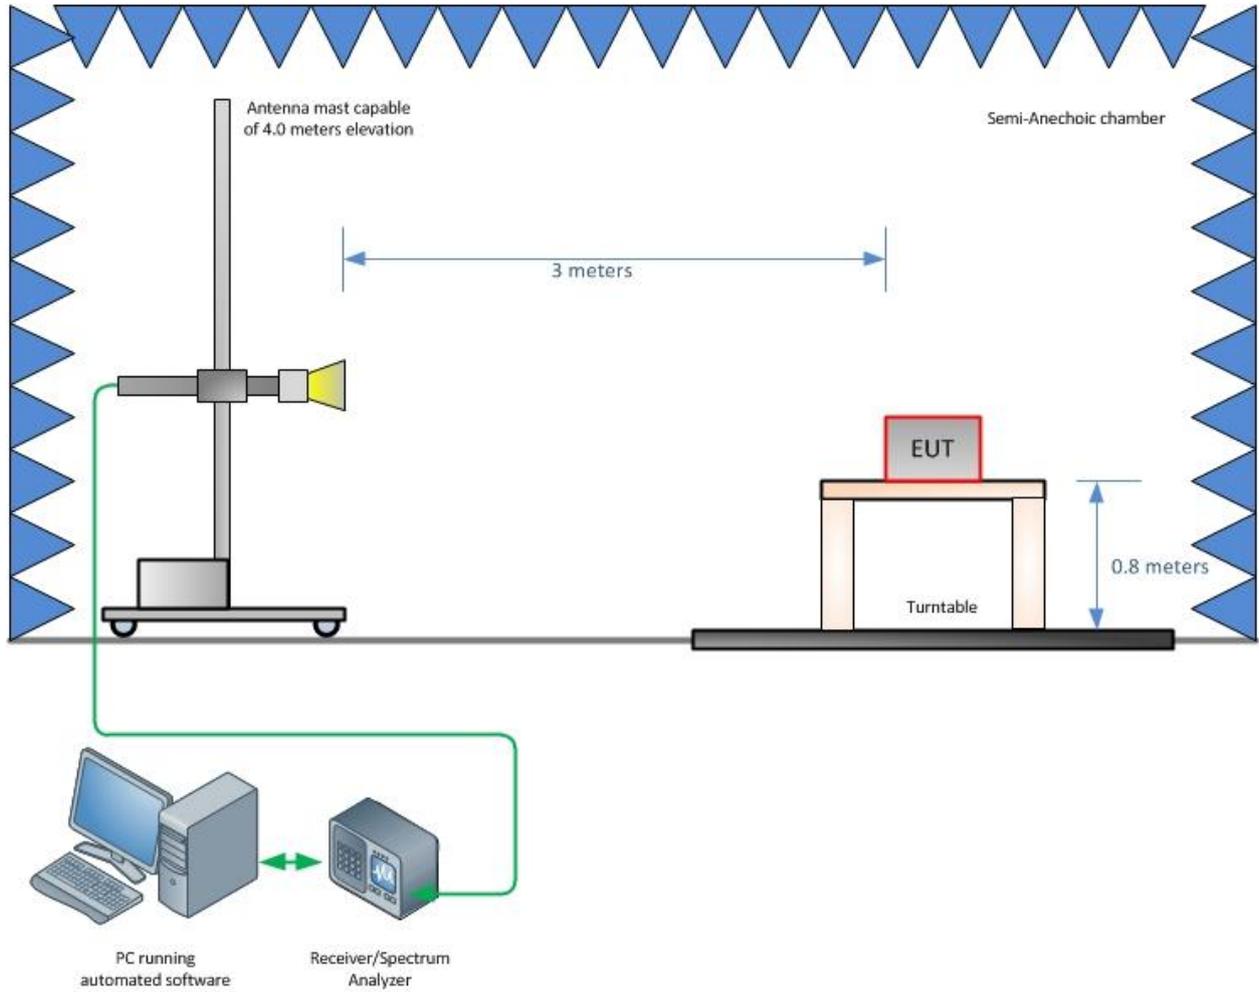

**Radiated Emission Test Setup (Above 1GHz)**



## SECTION 5

### ACCREDITATION, DISCLAIMERS AND COPYRIGHT



## 5.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT

TÜV SÜD America Inc.'s reports apply only to the specific sample tested under stated test conditions. It is the manufacturer's responsibility to assure the continued compliance of production units of this model. TÜV SÜD America, Inc. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD America, Inc.'s issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and TÜV SÜD America, Inc., extracts from the test report shall not be reproduced, except in full without TÜV SÜD America, Inc.'s written approval.

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

TÜV SÜD America, Inc. and its professional staff hold government and professional organization certifications for AAMI, ACIL, AEA, ANSI, IEEE, NVLAP, NIST and VCCI.



NVLAP Lab Code: 100268-0

