



Channel 120 (5600MHz)

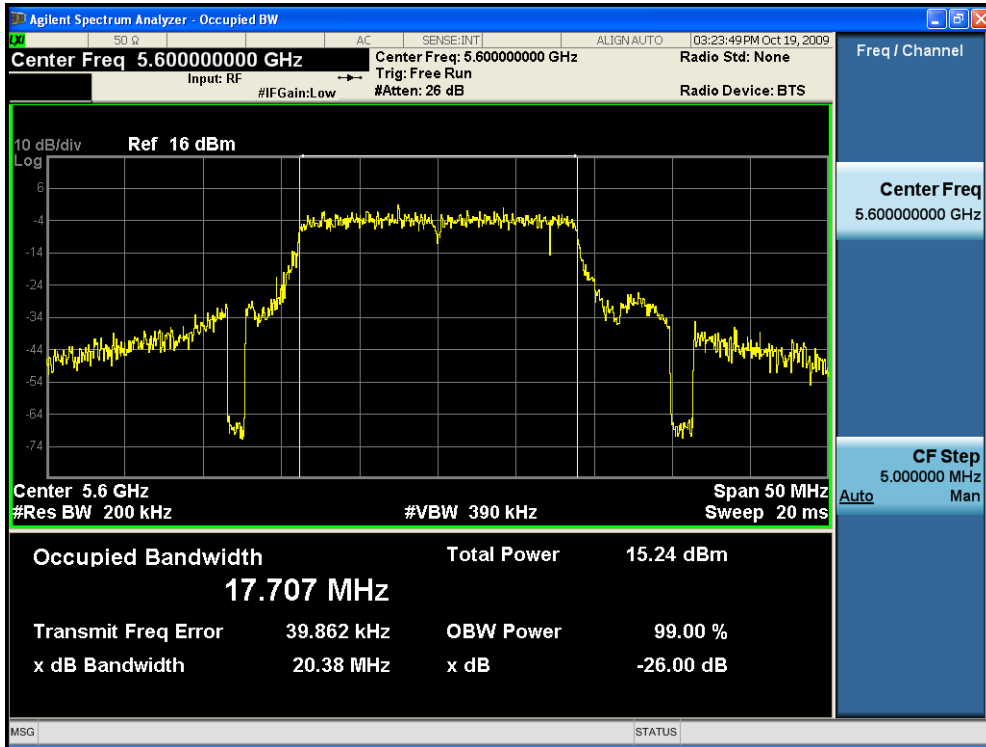


Channel 140 (5700MHz)

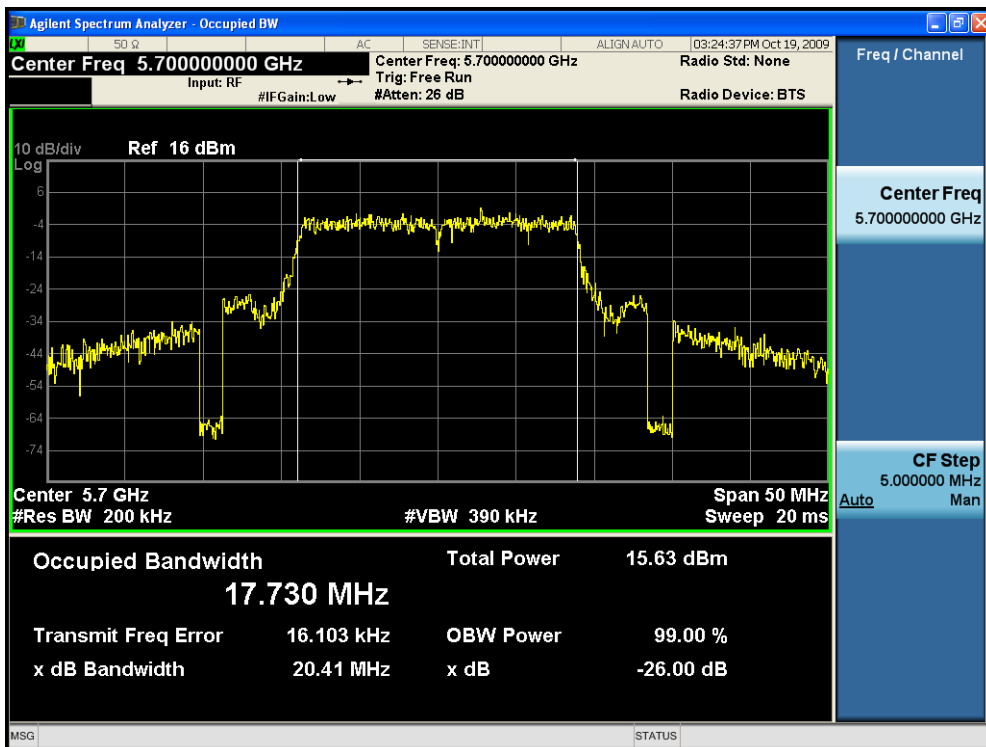


Product	:	802.11a/b/g/n WLAN Module
Test Item	:	26dB Occupied Bandwidth
Test Site	:	AC-6
Test Mode	:	Mode 3: Transmit by 802.11n (40MHz Bandwidth) (Chain 0)

Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	Limit (MHz)
38	5190	44.52	N/A
46	5230	40.70	N/A
54	5270	39.93	N/A
62	5310	42.49	N/A
102	5510	44.79	N/A
118	5590	44.54	N/A
134	5670	41.89	N/A


Channel 38 (5190MHz)

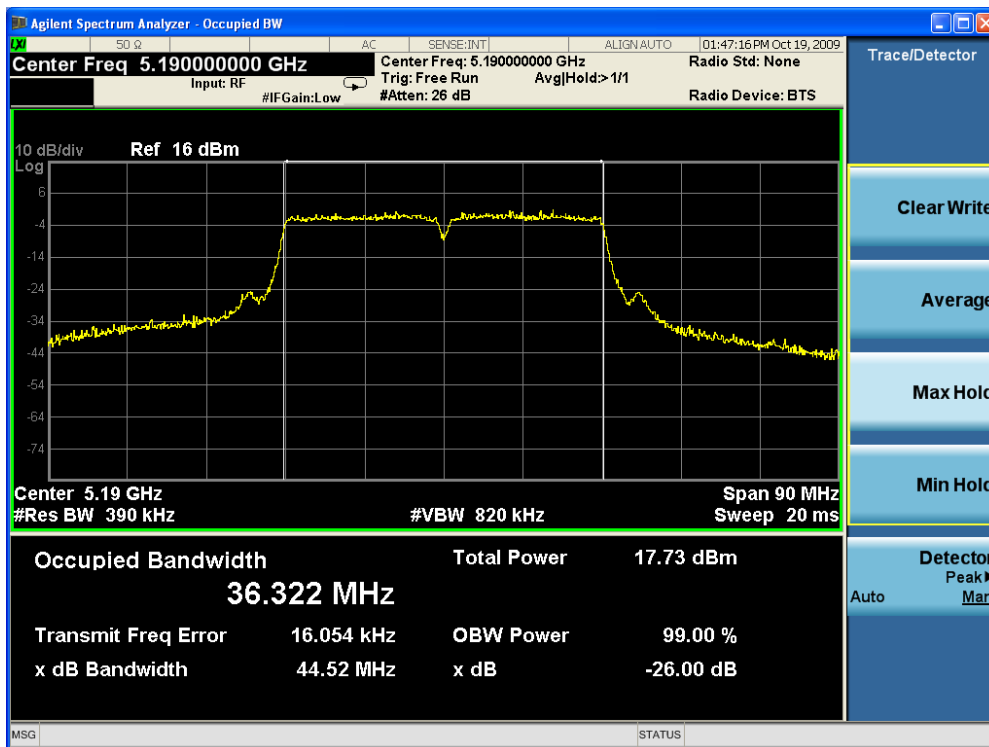


Channel 46 (5230MHz)

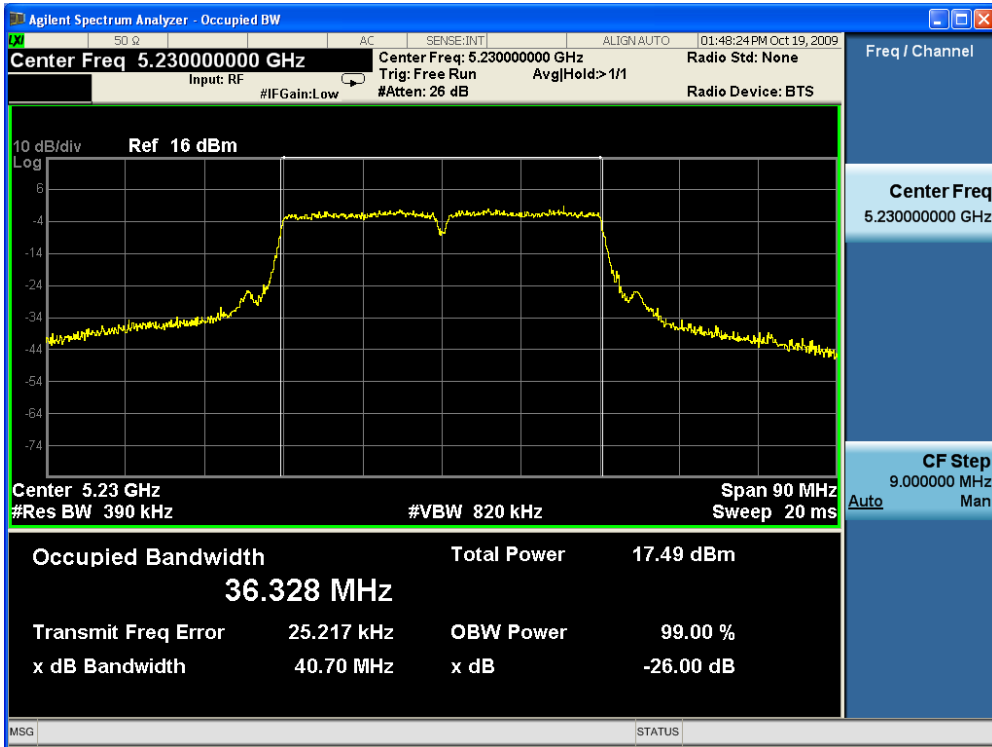


Channel 54 (5270MHz)

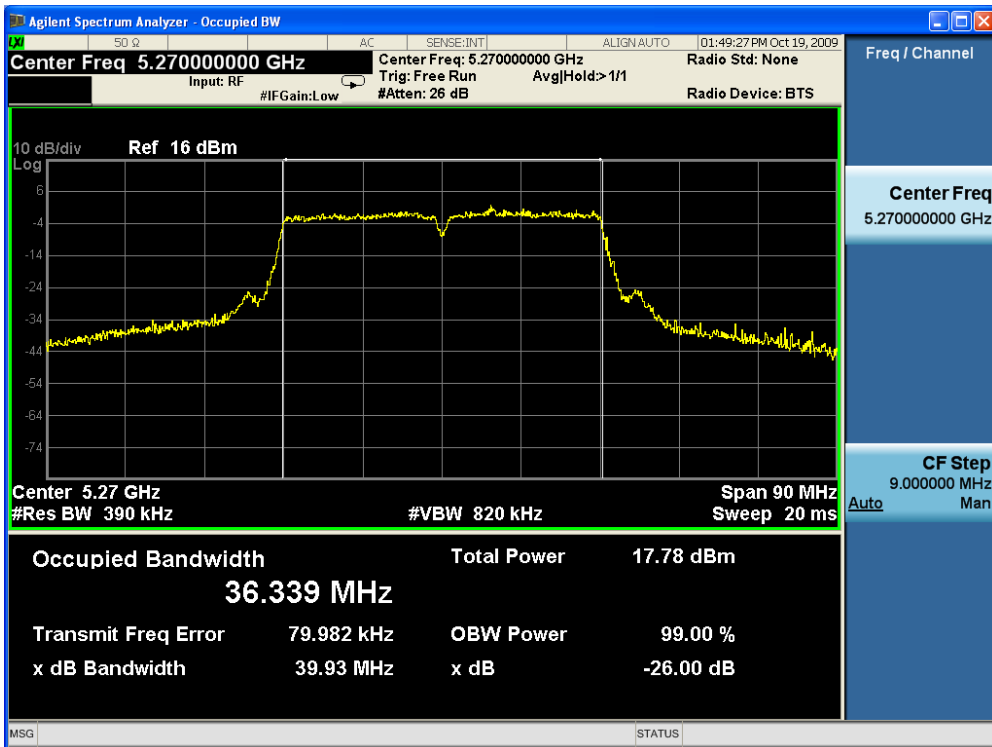


Channel 62 (5310MHz)

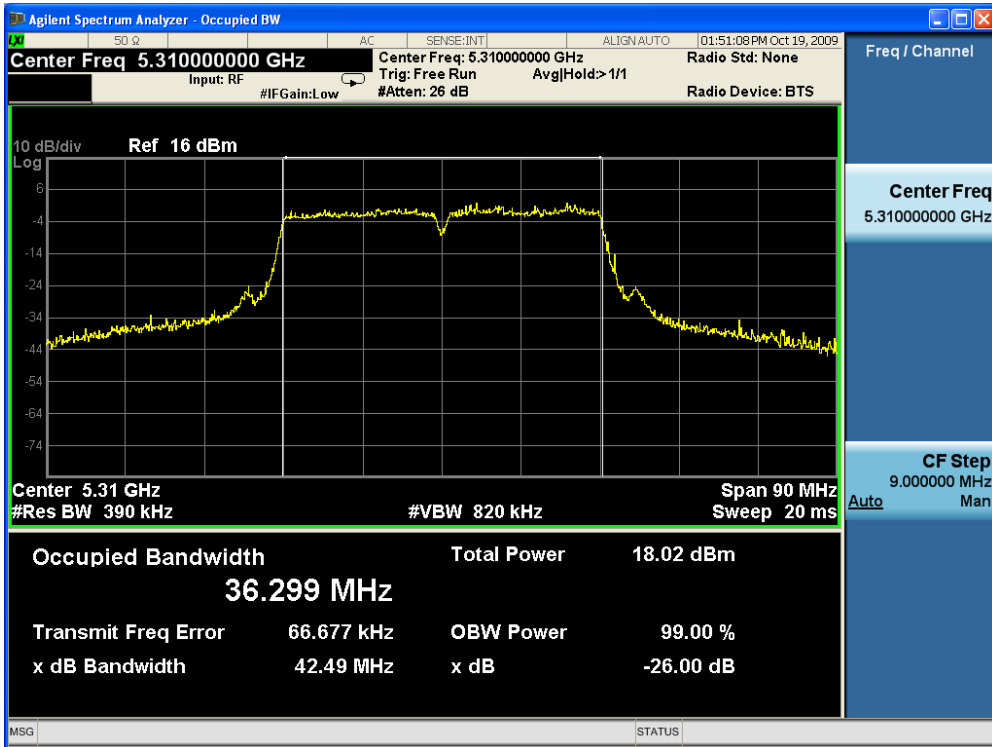


Channel 102 (5510MHz)

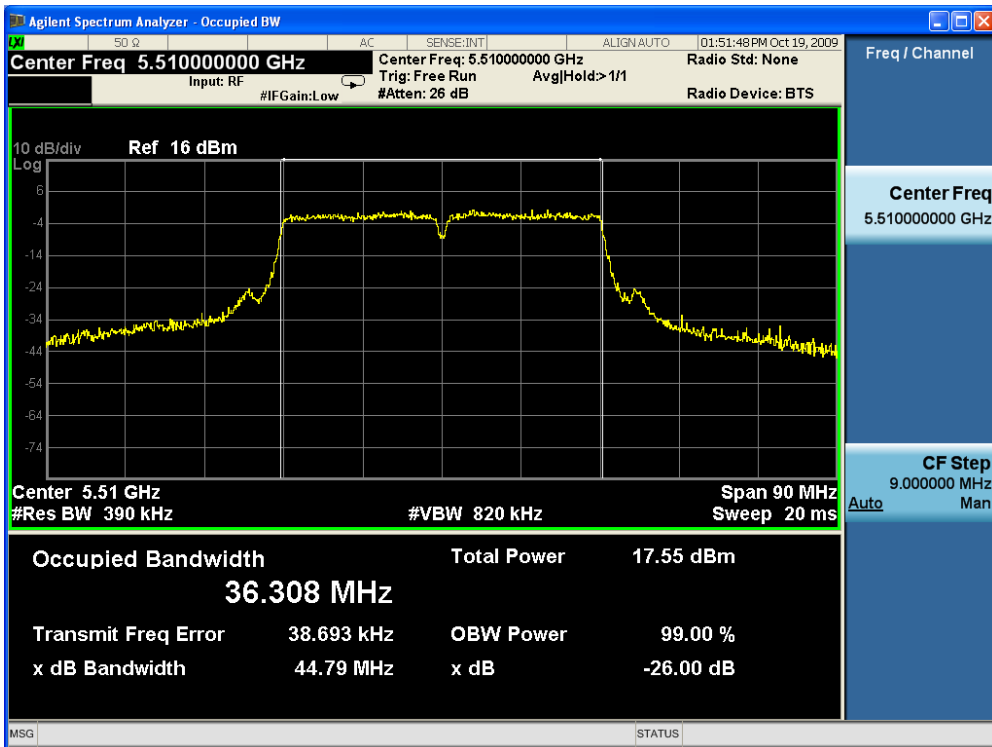

Channel 118 (5590MHz)

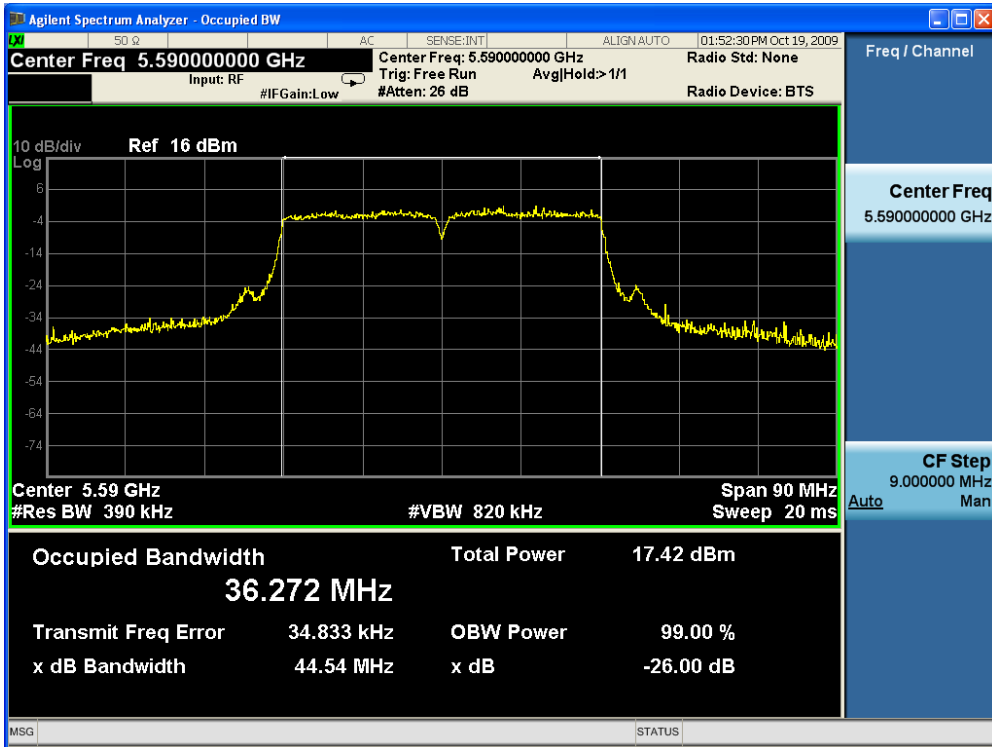


Channel 134 (5670MHz)

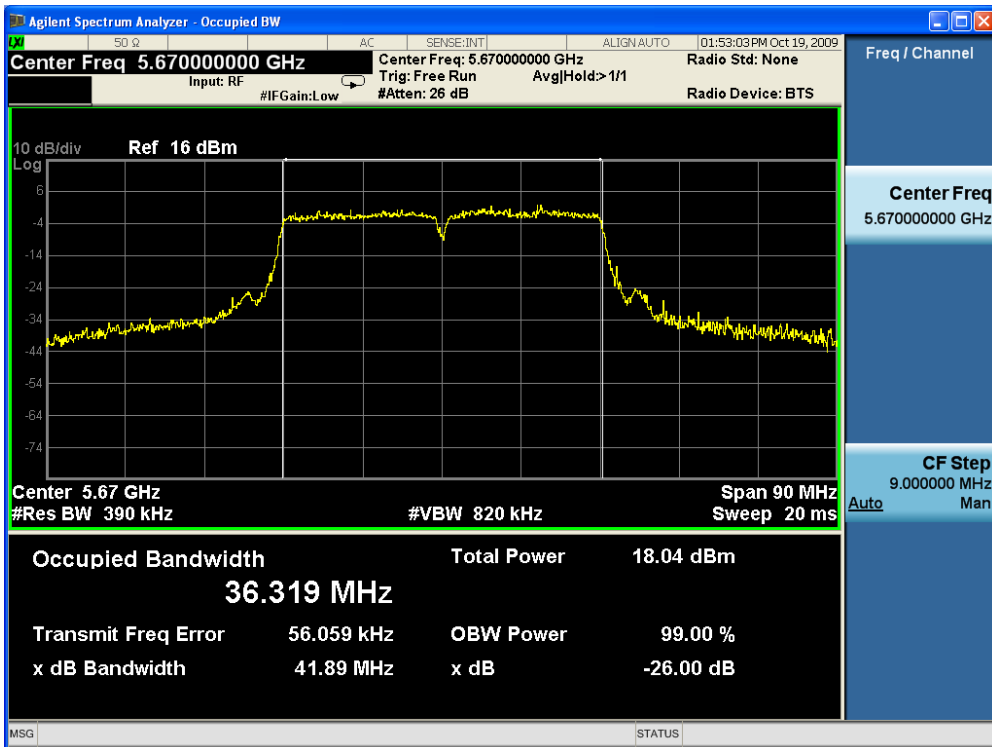


Product	:	802.11a/b/g/n WLAN Module
Test Item	:	26dB Occupied Bandwidth
Test Site	:	AC-6
Test Mode	:	Mode 3: Transmit by 802.11n (40MHz Bandwidth) (Chain 1)

Channel No.	Frequency (MHz)	26dB Occupied Bandwidth (MHz)	Limit (MHz)
38	5190	44.60	N/A
46	5230	39.17	N/A
54	5270	41.84	N/A
62	5310	39.85	N/A
102	5510	44.09	N/A
118	5590	41.81	N/A
134	5670	44.12	N/A


Channel 38 (5190MHz)

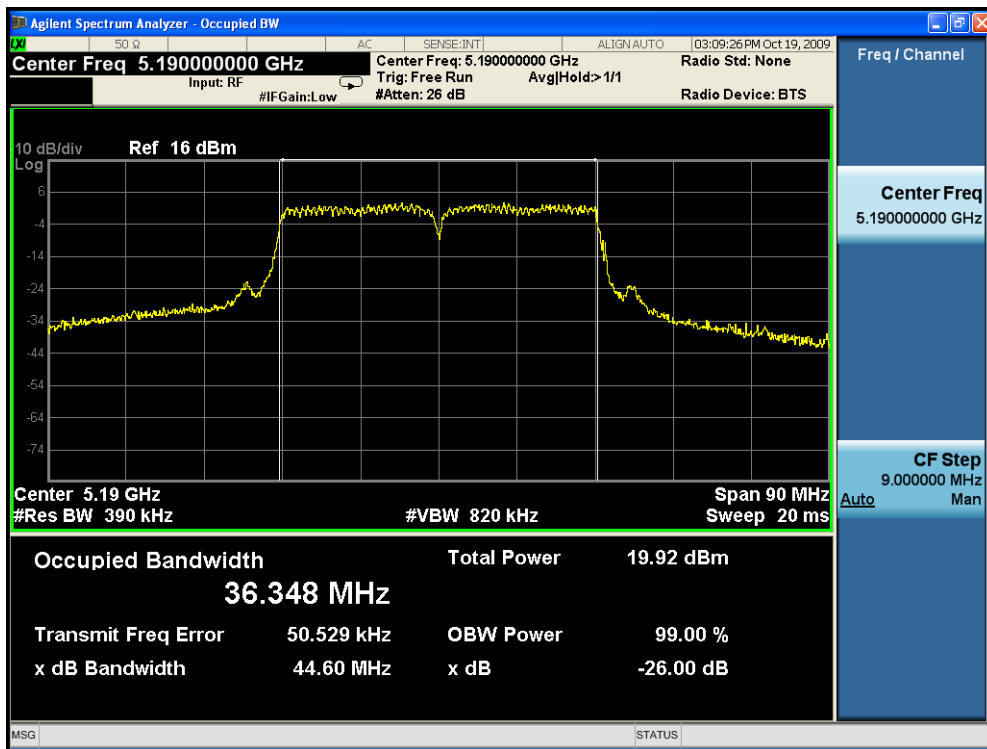


Channel 46 (5230MHz)

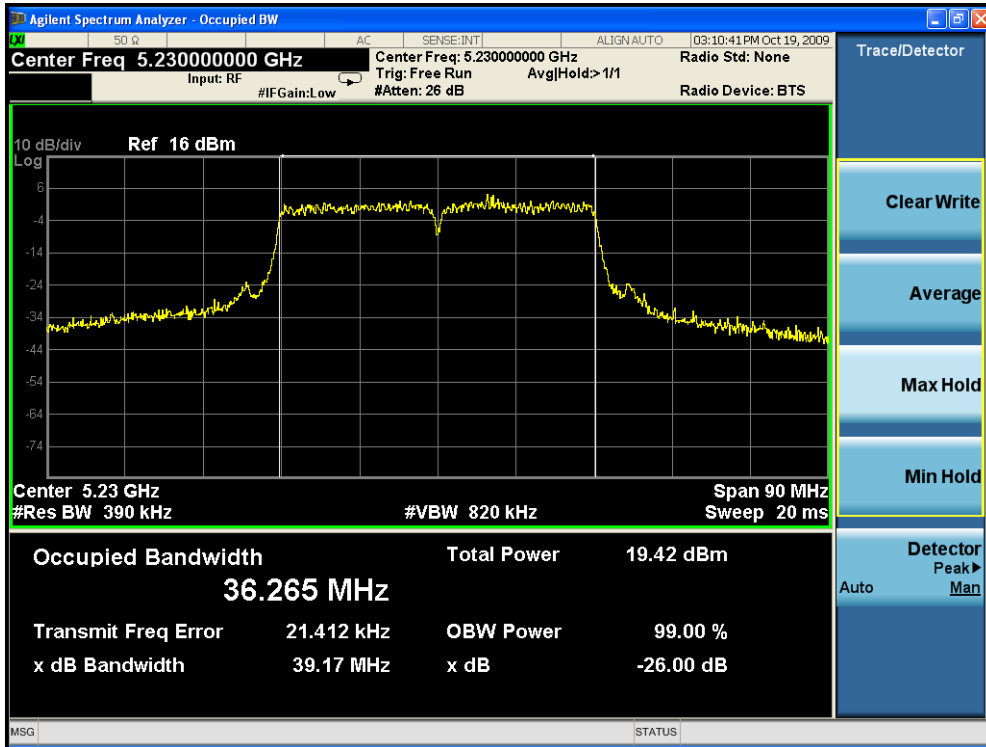


Channel 54 (5270MHz)

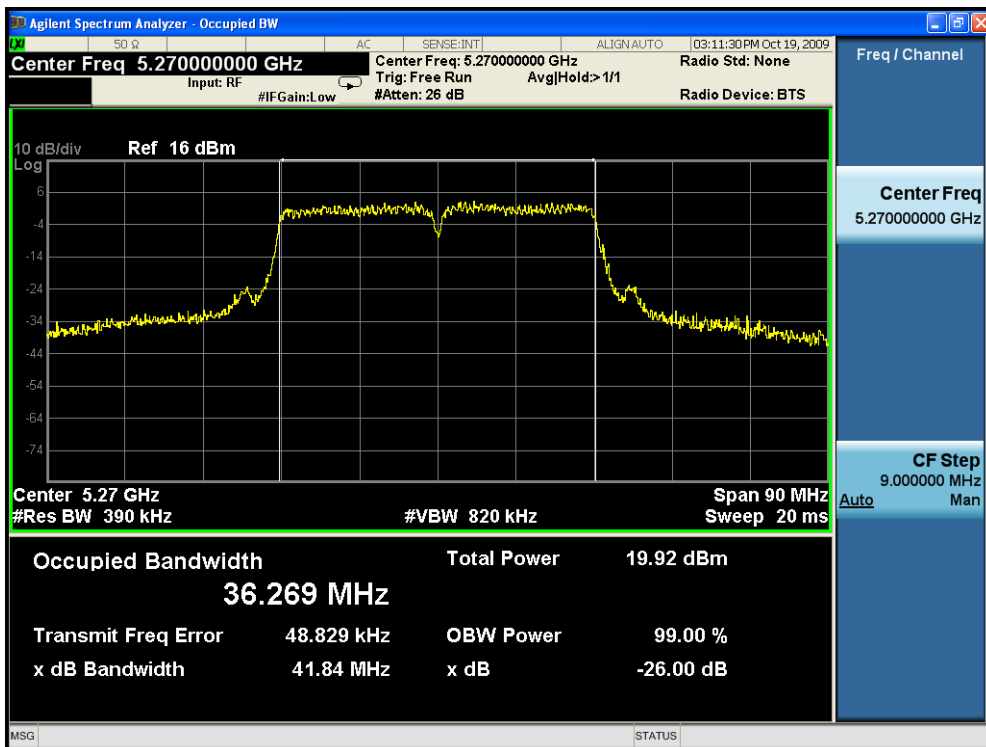


Channel 62 (5310MHz)

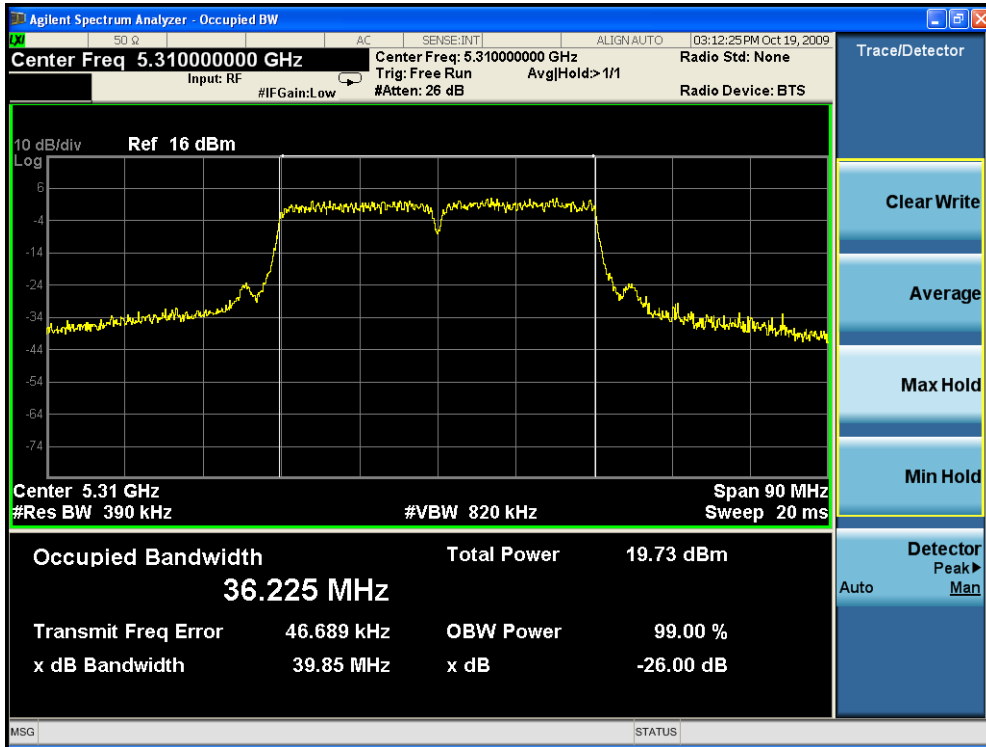


Channel 102 (5510MHz)

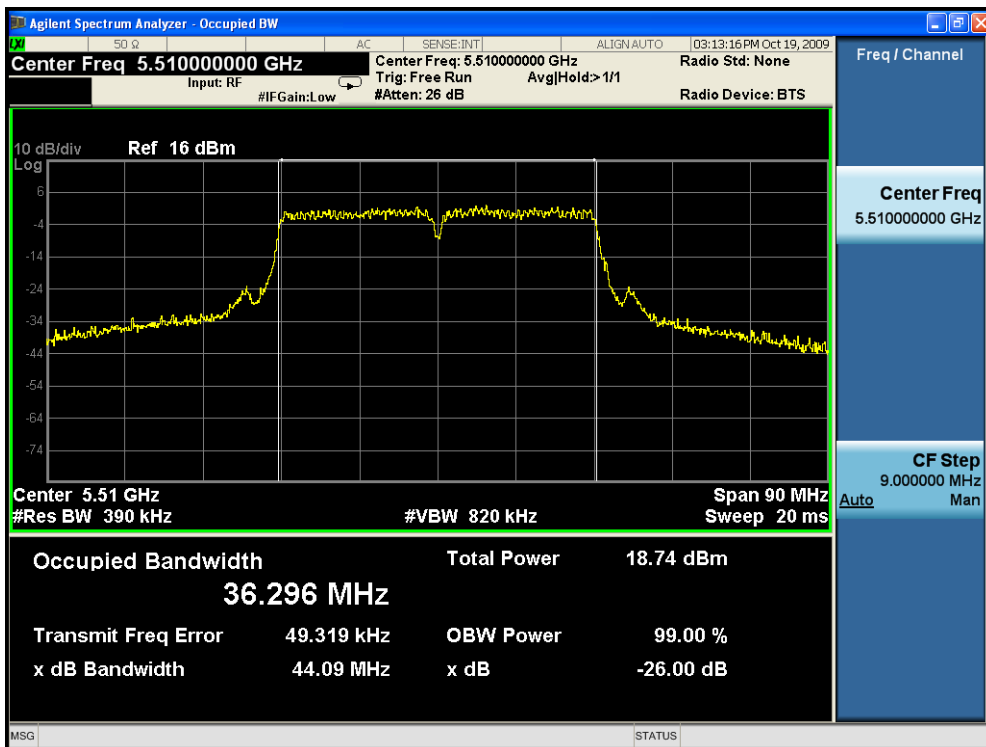

Channel 118 (5590MHz)

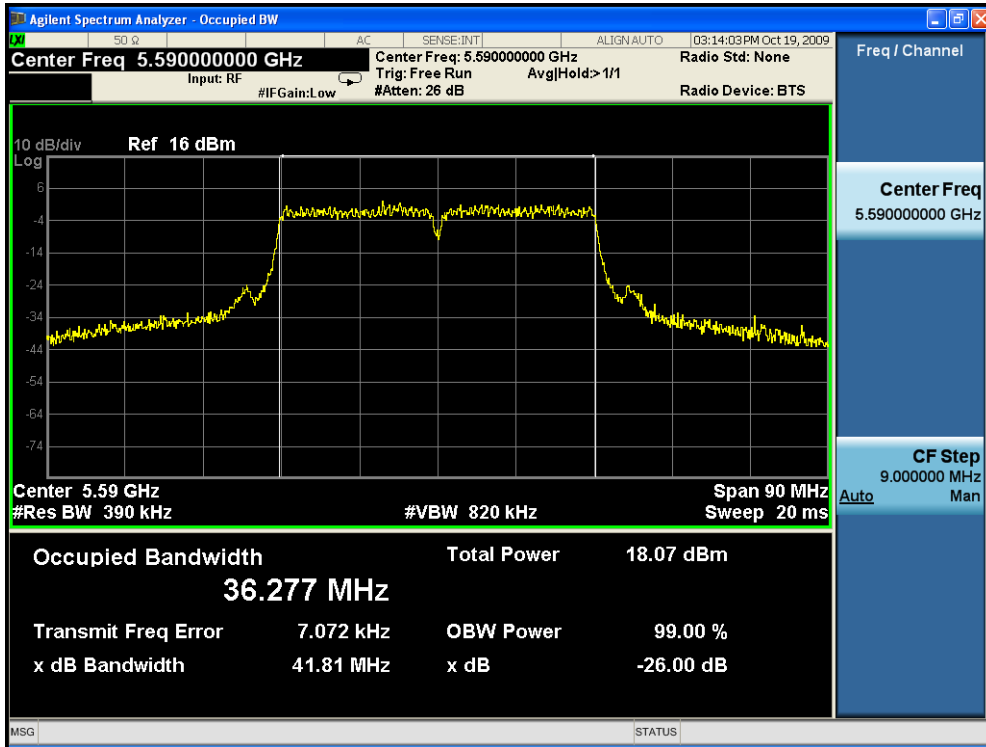

Channel 134 (5670MHz)

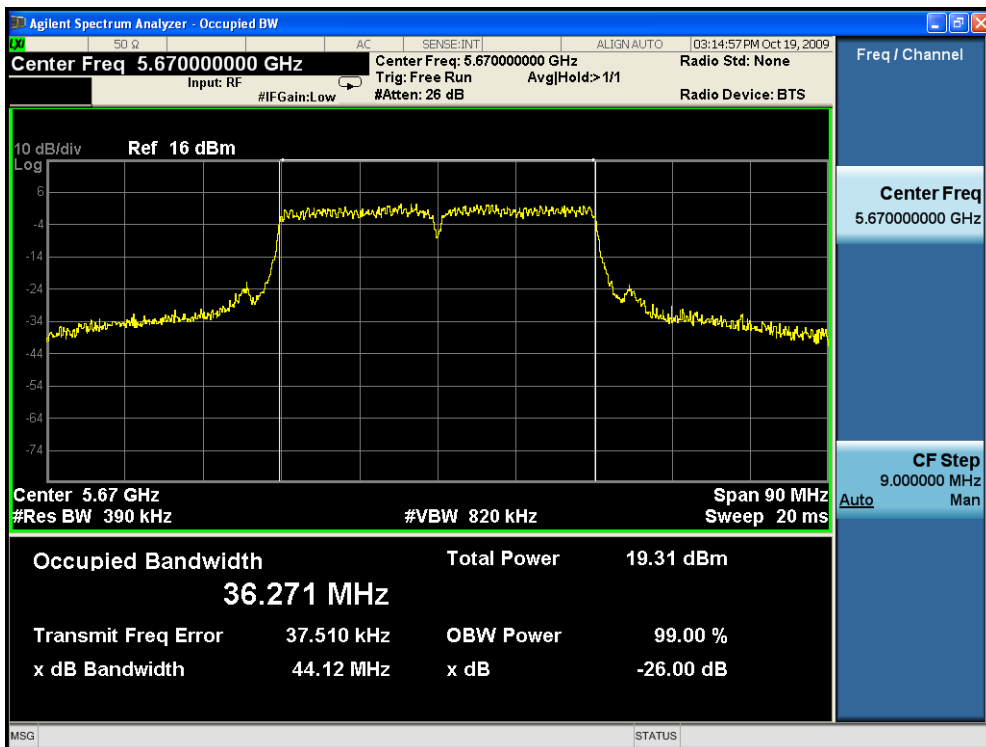

7. Power Output


7.1. Test Equipment

Power Output / AC-6

Instrument	Manufacturer	Type No.	Serial No.	Cal. Date
Wideband Peak Power Meter	Anritsu	ML2495A	0905006	2009/02/12
Power Sensor	Anritsu	MA2411B	0846014	2009/01/12
Coaxial Cable	Huber+Suhner	AC4-RF	09	2008/11/25
Temperature/Humidity Meter	zhicheng	ZC1-2	QT-TH007	2009/03/09

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

7.2. Test Setup

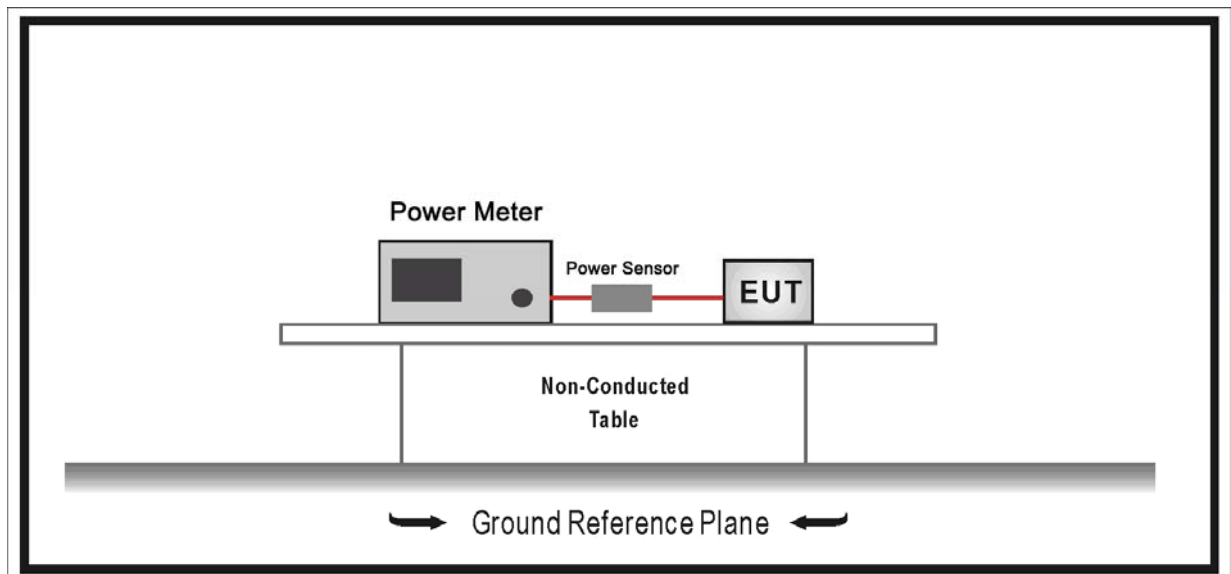

7.3. Limit

- For the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10\log B$, where B is the 26 dB emission bandwidth in MHz. If transmitting antenna of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that directional gain of the antenna exceeds 6 dBi.
- For the band 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10\log B$, where B is the 26 dB emission bandwidth in megahertz. If transmitting antenna of directional gain greater than 6 dBi are used, the maximum conducted output

power shall be reduced by the amount in dB that directional gain of the antenna exceeds 6 dBi.

- For the band 5.725-5.825 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 1 W or 17 dBm + 10log B, where B is the 26 dB emission bandwidth in MHz. If transmitting antenna of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain up to 23 dBi without any corresponding reduction in the transmitter peak output power. For fixed, point-to-point U-NII transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in peak transmitter power for each 1 dB of antenna gain in excess of 23 dBi would be required.

7.4. Test Procedure

The EUT was tested according to FCC Public Notice DA 02-2138, August 30, 2002 for compliance to FCC 47CFR 15.407 requirements.

Use the wideband power meter to test peak power and record the result.

7.5. Uncertainty

The measurement uncertainty is defined as ± 1.27 dB

7.6. Test Result

Power output test was verified over all data rates of each mode shown as below, and then choose the maximum power output (blue marker) for final test of each channel.

MCS Index for 802.11n	Spatial Streams	Data Rate (Mbps)				
		802.11a	20MHz Bandwidth		40MHz Bandwidth	
			800ns GI	400ns GI	800ns GI	400ns GI
0	1	6	6.5	7.2	13.5	15.0
1	1	9	13.0	14.4	27.0	30.0
2	1	12	19.5	21.7	40.5	45.0
3	1	18	26.0	28.9	54.0	60.0
4	1	24	39.0	43.3	81.0	90.0
5	1	36	52.0	57.8	108.0	120.0
6	1	48	58.5	65.0	121.5	135.0
7	1	54	65.0	72.2	135.0	150.0
8	2	---	13.0	14.4	27.0	30.0
9	2	---	26.0	28.9	54.0	60.0
10	2	---	39.0	43.3	81.0	90.0
11	2	---	52.0	57.8	108.0	120.0
12	2	---	78.0	86.7	162.0	180.0
13	2	---	104.0	115.6	216.0	240.0
14	2	---	117.0	130.0	243.0	270.0
15	2	---	130.0	144.0	270.0	300.0

Peak power output at various data rates:

Test Mode	Chain	Bandwidth	Frequency (MHz)	Channel	Data Rate	Peak Power (dBm)
802.11a	0	20	5200	40	6	16.57
					24	16.48
					54	16.36
802.11a	1	20	5200	40	6	16.45
					24	16.38
					54	16.31
802.11n	0	20	5200	40	HT0	16.26
					HT4	16.18
					HT7	16.09
802.11n	1	20	5200	40	HT0	16.42
					HT4	16.35
					HT7	16.28
802.11n	0	40	5230	46	HT0	16.05
					HT4	15.97
					HT7	15.86
802.11n	1	40	5230	46	HT0	16.25
					HT4	16.18
					HT7	16.12

Product	: 802.11a/b/g/n WLAN Module
Test Item	: Power Output
Test Site	: AC-6
Test Mode	: Mode 1: Transmit by 802.11a (Chain 0)

Channel No.	Frequency (MHz)	Measurement Power Output (dBm)		Total Power (dBm)	Limit (dBm)	Result
		Chain 0	Chain 1			
36	5180	16.70	N/A	16.70	17.00	Pass
40	5200	16.57	N/A	16.57	17.00	Pass
48	5240	16.42	N/A	16.42	17.00	Pass
52	5260	18.48	N/A	18.48	24.00	Pass
60	5300	18.60	N/A	18.60	24.00	Pass
64	5320	18.66	N/A	18.66	24.00	Pass
100	5500	18.44	N/A	18.44	24.00	Pass
120	5600	17.81	N/A	17.81	24.00	Pass
140	5700	19.02	N/A	19.02	24.00	Pass

Product	: 802.11a/b/g/n WLAN Module
Test Item	: Power Output
Test Site	: AC-6
Test Mode	: Mode 2: Transmit by 802.11n(20MHz) (Chain 0)

Channel No.	Frequency (MHz)	Measurement Power Output (dBm)		Total Power (dBm)	Limit (dBm)	Result
		Chain 0	Chain 1			
36	5180	16.42	N/A	16.42	17.00	Pass
40	5200	16.26	N/A	16.26	17.00	Pass
48	5240	16.25	N/A	16.25	17.00	Pass
52	5260	18.45	N/A	18.45	24.00	Pass
60	5300	18.73	N/A	18.73	24.00	Pass
64	5320	18.67	N/A	18.67	24.00	Pass
100	5500	18.46	N/A	18.46	24.00	Pass
120	5600	18.18	N/A	18.18	24.00	Pass
140	5700	19.08	N/A	19.08	24.00	Pass

Product	:	802.11a/b/g/n WLAN Module
Test Item	:	Power Output
Test Site	:	AC-6
Test Mode	:	Mode 3: Transmit by 802.11n(40MHz) (Chain 0)

Channel No.	Frequency (MHz)	Measurement Power Output (dBm)		Total Power (dBm)	Limit (dBm)	Result
		Chain 0	Chain 1			
38	5190	16.23	N/A	16.23	17.00	Pass
46	5230	16.05	N/A	16.05	17.00	Pass
54	5270	16.48	N/A	16.48	24.00	Pass
62	5310	16.52	N/A	16.52	24.00	Pass
102	5510	16.67	N/A	16.67	24.00	Pass
118	5590	16.01	N/A	16.01	24.00	Pass
134	5670	16.80	N/A	16.80	24.00	Pass

Product	:	802.11a/b/g/n WLAN Module
Test Item	:	Power Output
Test Site	:	AC-6
Test Mode	:	Mode 1: Transmit by 802.11a (Chain 1)

Channel No.	Frequency (MHz)	Measurement Power Output (dBm)		Total Power (dBm)	Limit (dBm)	Result
		Chain 0	Chain 1			
36	5180	N/A	16.11	16.11	17.00	Pass
40	5200	N/A	16.45	16.45	17.00	Pass
48	5240	N/A	16.14	16.14	17.00	Pass
52	5260	N/A	19.22	19.22	24.00	Pass
60	5300	N/A	19.38	19.38	24.00	Pass
64	5320	N/A	19.58	19.58	24.00	Pass
100	5500	N/A	18.42	18.42	24.00	Pass
120	5600	N/A	18.40	18.40	24.00	Pass
140	5700	N/A	18.72	18.72	24.00	Pass

Product	: 802.11a/b/g/n WLAN Module
Test Item	: Power Output
Test Site	: AC-6
Test Mode	: Mode 2: Transmit by 802.11n(20MHz) (Chain 1)

Channel No.	Frequency (MHz)	Measurement Power Output (dBm)		Total Power (dBm)	Limit (dBm)	Result
		Chain 0	Chain 1			
36	5180	N/A	16.18	16.18	17.00	Pass
40	5200	N/A	16.42	16.42	17.00	Pass
48	5240	N/A	16.26	16.26	17.00	Pass
52	5260	N/A	19.08	19.08	24.00	Pass
60	5300	N/A	19.46	19.46	24.00	Pass
64	5320	N/A	19.34	19.34	24.00	Pass
100	5500	N/A	18.32	18.32	24.00	Pass
120	5600	N/A	18.13	18.13	24.00	Pass
140	5700	N/A	19.18	19.18	24.00	Pass

Product	: 802.11a/b/g/n WLAN Module
Test Item	: Power Output
Test Site	: AC-6
Test Mode	: Mode 3: Transmit by 802.11n(40MHz) (Chain 1)

Channel No.	Frequency (MHz)	Measurement Power Output (dBm)		Total Power (dBm)	Limit (dBm)	Result
		Chain 0	Chain 1			
38	5190	N/A	16.16	16.16	17.00	Pass
46	5230	N/A	16.25	16.25	17.00	Pass
54	5270	N/A	16.42	16.42	24.00	Pass
62	5310	N/A	17.22	17.22	24.00	Pass
102	5510	N/A	16.33	16.33	24.00	Pass
118	5590	N/A	16.49	16.49	24.00	Pass
134	5670	N/A	17.79	17.79	24.00	Pass

Product	: 802.11a/b/g/n WLAN Module
Test Item	: Power Output
Test Site	: AC-6
Test Mode	: Mode 2: Transmit by 802.11n(20MHz) (Chain 0+1)

Channel No.	Frequency (MHz)	Measurement Power Output (dBm)		Total Power (dBm)	Limit (dBm)	Result
		Chain 0	Chain 1			
36	5180	13.74	13.61	16.69	17.00	Pass
40	5200	13.42	13.16	16.30	17.00	Pass
48	5240	13.23	13.48	16.37	17.00	Pass
52	5260	18.68	18.81	21.76	24.00	Pass
60	5300	18.59	18.80	21.71	24.00	Pass
64	5320	18.74	18.73	21.75	24.00	Pass
100	5500	18.71	17.92	21.34	24.00	Pass
120	5600	16.92	17.87	20.43	24.00	Pass
140	5700	18.86	18.55	21.72	24.00	Pass

Product	: 802.11a/b/g/n WLAN Module
Test Item	: Power Output
Test Site	: AC-6
Test Mode	: Mode 3: Transmit by 802.11n(40MHz) (Chain 0+1)

Channel No.	Frequency (MHz)	Measurement Power Output (dBm)		Total Power (dBm)	Limit (dBm)	Result
		Chain 0	Chain 1			
38	5190	12.98	12.96	15.98	17.00	Pass
46	5230	12.69	13.08	15.90	17.00	Pass
54	5270	17.08	18.32	20.75	24.00	Pass
62	5310	18.31	17.44	20.91	24.00	Pass
102	5510	16.50	17.08	20.81	24.00	Pass
118	5590	16.93	16.80	20.88	24.00	Pass
134	5670	17.78	17.68	21.74	24.00	Pass

8. Peak Power Spectral Density


8.1. Test Equipment

Peak Power Spectral Density / AC-6

Instrument	Manufacturer	Type No.	Serial No.	Cal. Date
Spectrum Analyzer	Agilent	N9020A	MY49100159	2009/05/06
Coaxial Cable	Huber+Suhner	AC6-RF	09	2008/11/25
Temperature/Humidity Meter	zhicheng	ZC1-2	QT-TH007	2009/03/09

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

8.2. Test Setup

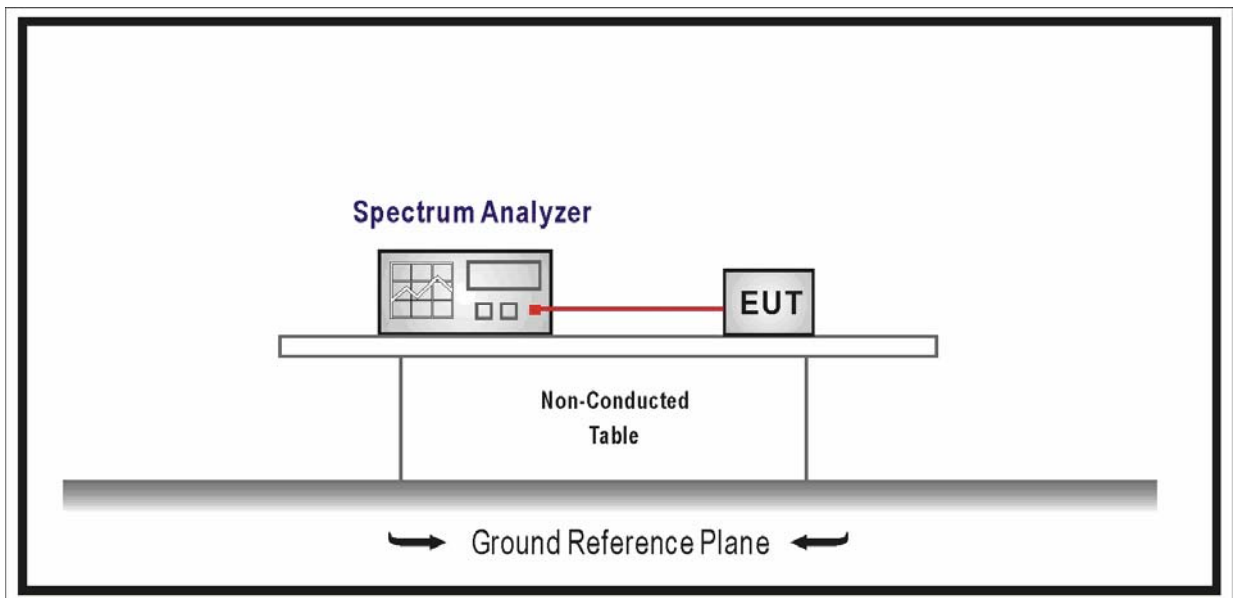

8.3. Limit

- For the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in MHz. If transmitting antenna of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that directional gain of the antenna exceeds 6 dBi.
- For the band 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. If transmitting

antenna of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that directional gain of the antenna exceeds 6 dBi.

- For the band 5.725-5.825 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 1 W or $17 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in MHz. If transmitting antenna of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain up to 23 dBi without any corresponding reduction in the transmitter peak output power. For fixed, point-to-point U-NII transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in peak transmitter power for each 1 dB of antenna gain in excess of 23 dBi would be required.

8.4. Test Procedure

The EUT was tested according to FCC Public Notice DA 02-2138, August 30, 2002 for compliance to FCC 47CFR 15.407 requirements.

Use sample detector and power averaging (not video averaging) mode. Set RBW= 1 MHz*, VBW > 1 MHz. The PPSD is the highest level found across the emission in any 1-MHz band after 100 sweeps of averaging. This method is permitted only if the transmission pulse or sequence of pulses remains at maximum transmit power throughout each of the 100 sweeps of averaging and that the interval between pulses is not included in any of the sweeps (e.g., 100 sweeps should occur during one transmission, or each sweep gated to occur during a transmission).

8.5. Uncertainty


The measurement uncertainty is defined as $\pm 1.27 \text{ dB}$

8.6. Test Result


Product	:	802.11a/b/g/n WLAN Module
Test Item	:	Peak Power Spectral Density
Test Site	:	AC-6
Test Mode	:	Mode 1: Transmit by 802.11a (Chain 0)

Channel No.	Frequency (MHz)	Measurement PPSD (dBm/MHz)		Total PPSD (dBm/MHz)	Limit (dBm/MHz)	Result
		Chain 0	Chain 1			
36	5180	1.843	N/A	1.843	4	Pass
40	5200	1.654	N/A	1.654	4	Pass
48	5240	1.589	N/A	1.589	4	Pass
52	5260	1.513	N/A	1.513	11	Pass
60	5300	1.836	N/A	1.836	11	Pass
64	5320	2.132	N/A	2.132	11	Pass
100	5500	1.959	N/A	1.959	11	Pass
120	5600	1.552	N/A	1.552	11	Pass
140	5700	2.249	N/A	2.249	11	Pass


Channel 36 (5180MHz)

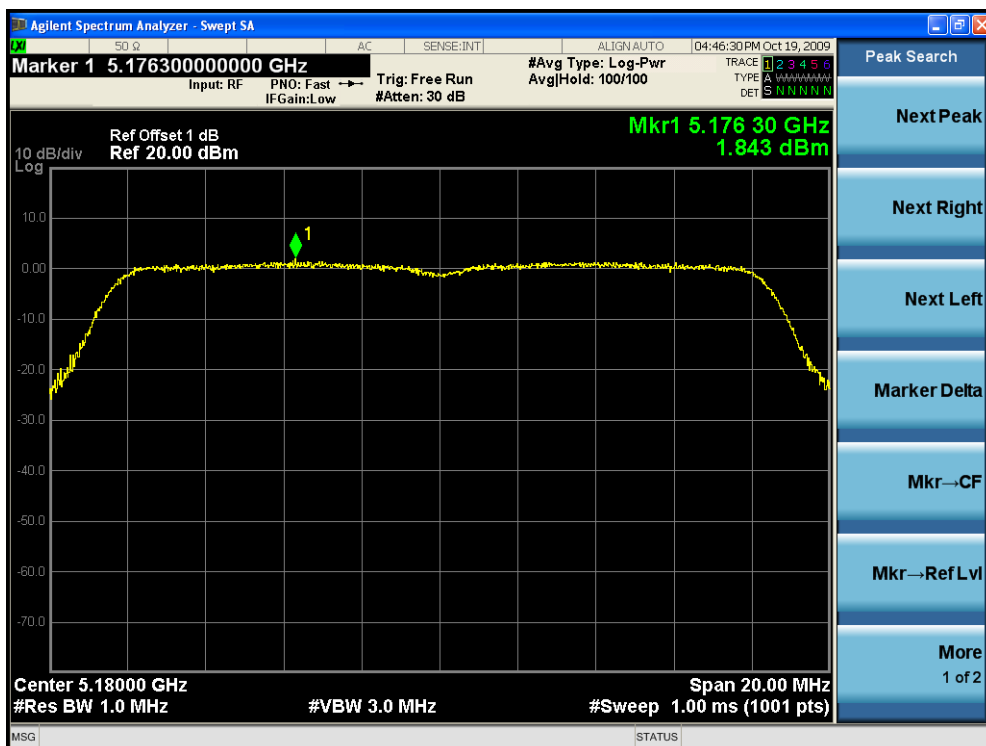

Channel 40 (5200MHz)

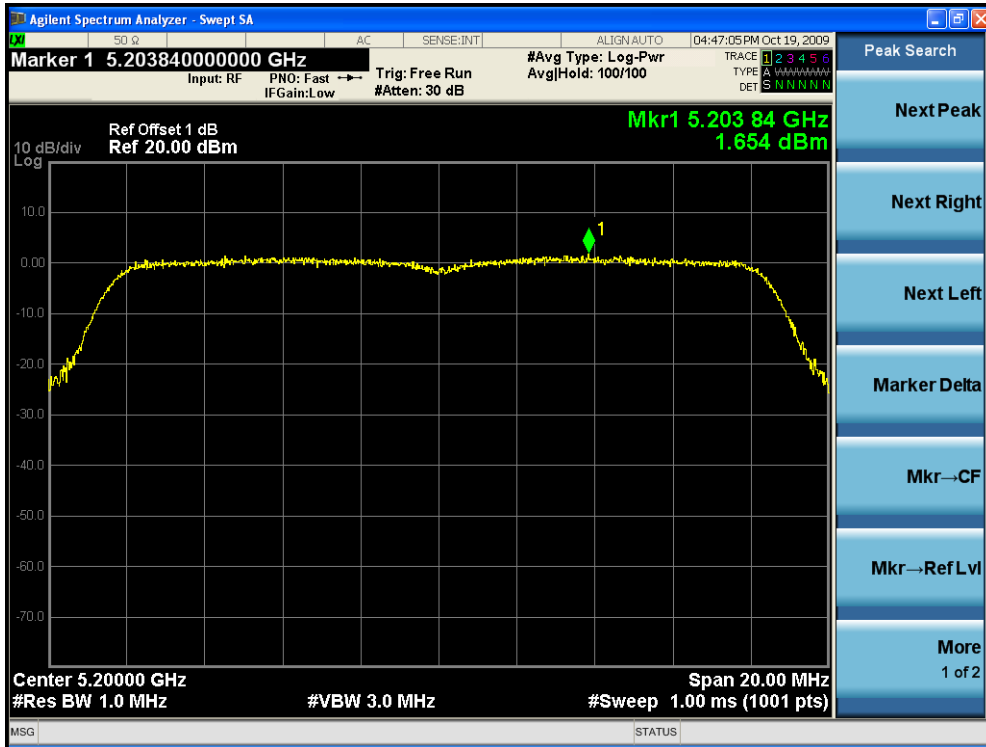


Channel 48 (5240MHz)

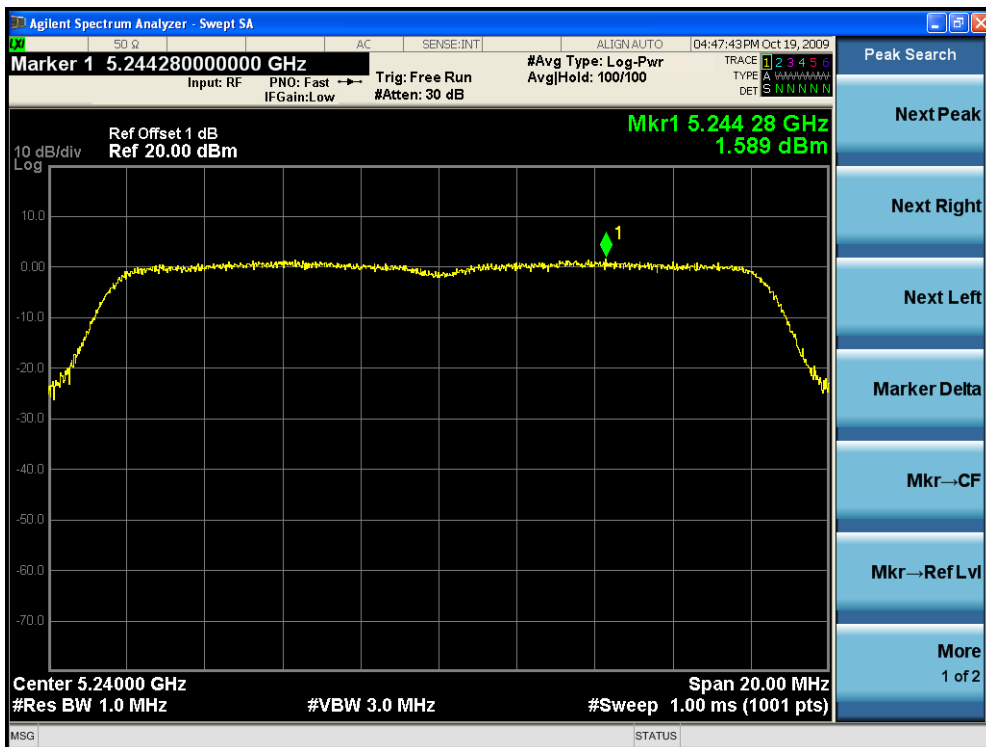

Channel 52 (5260MHz)




Channel 60 (5300MHz)

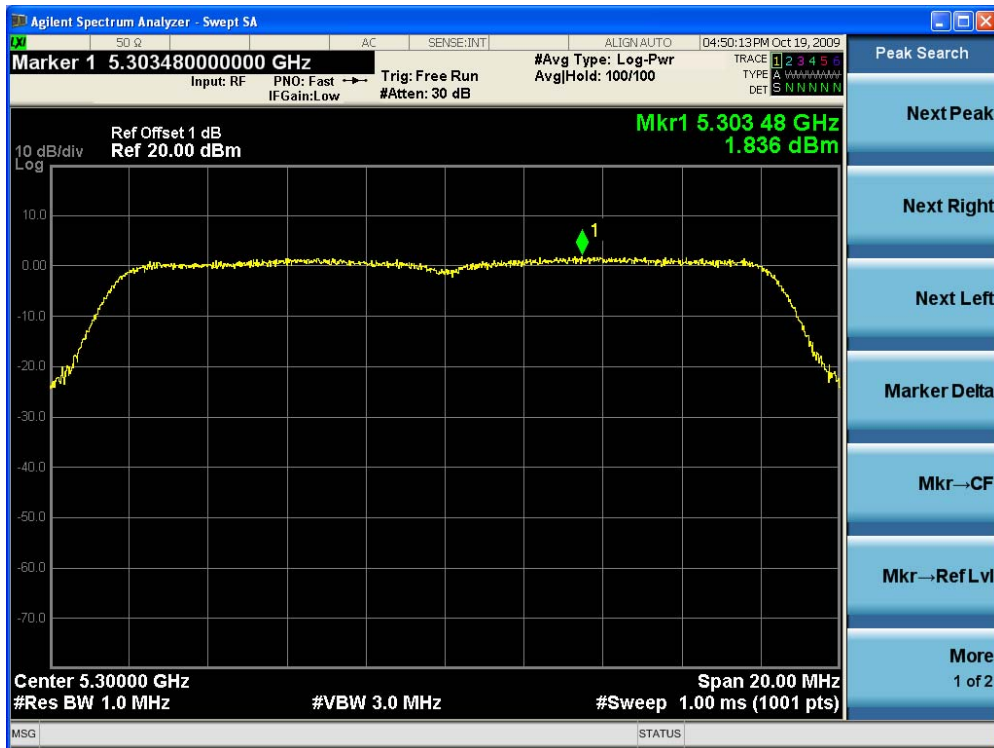


Channel 64 (5320MHz)



Channel 100 (5500MHz)

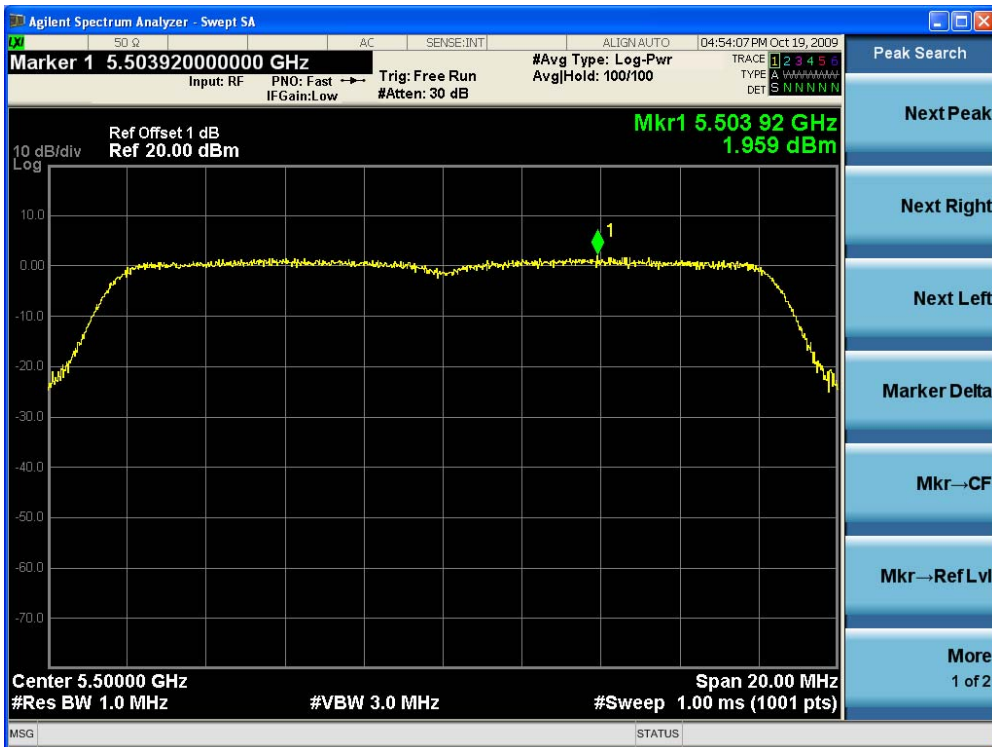

Channel 120 (5600MHz)

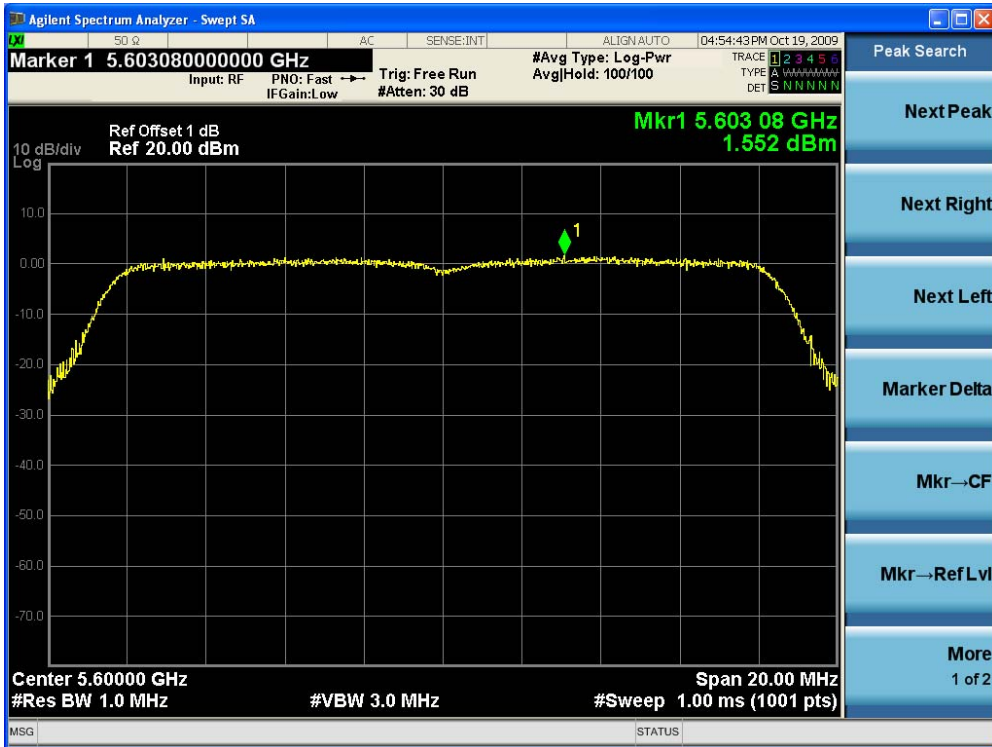

Channel 140 (5700MHz)




Product	:	802.11a/b/g/n WLAN Module
Test Item	:	Power Output
Test Site	:	AC-6
Test Mode	:	Mode 1: Transmit by 802.11a (Chain 1)

Channel No.	Frequency (MHz)	Measurement PPSD (dBm/MHz)		Total PPSD (dBm/MHz)	Limit (dBm/MHz)	Result
		Chain 0	Chain 1			
36	5180	N/A	2.129	2.129	4	Pass
40	5200	N/A	1.729	1.729	4	Pass
48	5240	N/A	1.734	1.734	4	Pass
52	5260	N/A	2.005	2.005	11	Pass
60	5300	N/A	2.840	2.840	11	Pass
64	5320	N/A	2.280	2.280	11	Pass
100	5500	N/A	1.201	1.201	11	Pass
120	5600	N/A	1.392	1.392	11	Pass
140	5700	N/A	1.931	1.931	11	Pass


Channel 36 (5180MHz)




Channel 40 (5200MHz)

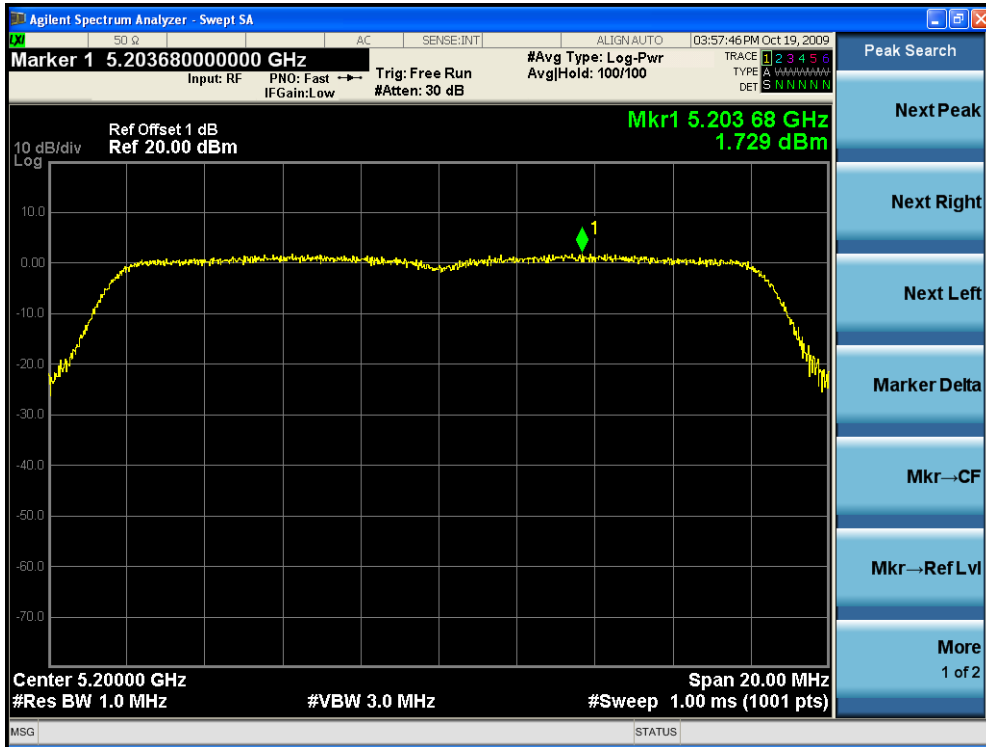


Channel 48 (5240MHz)

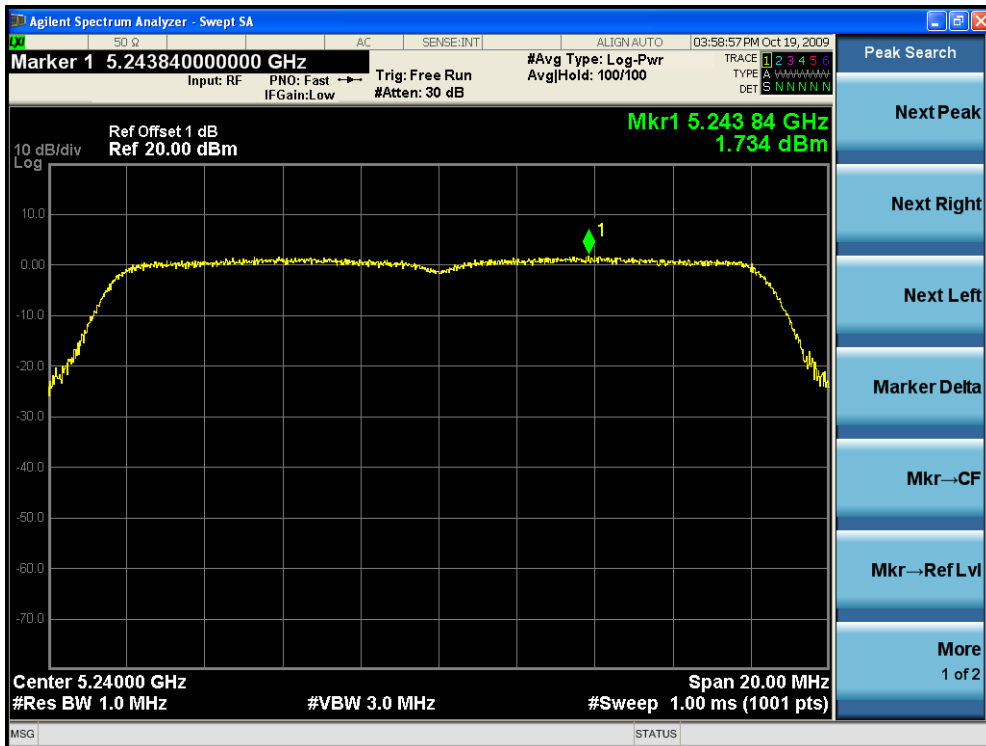


Channel 52 (5260MHz)

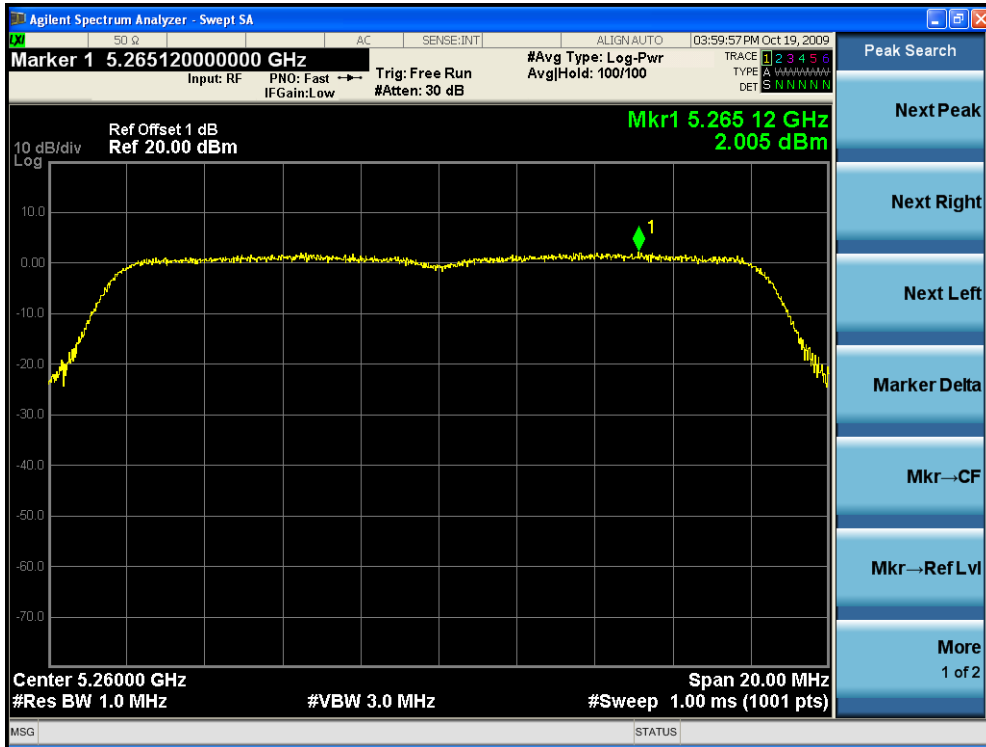


Channel 60 (5300MHz)

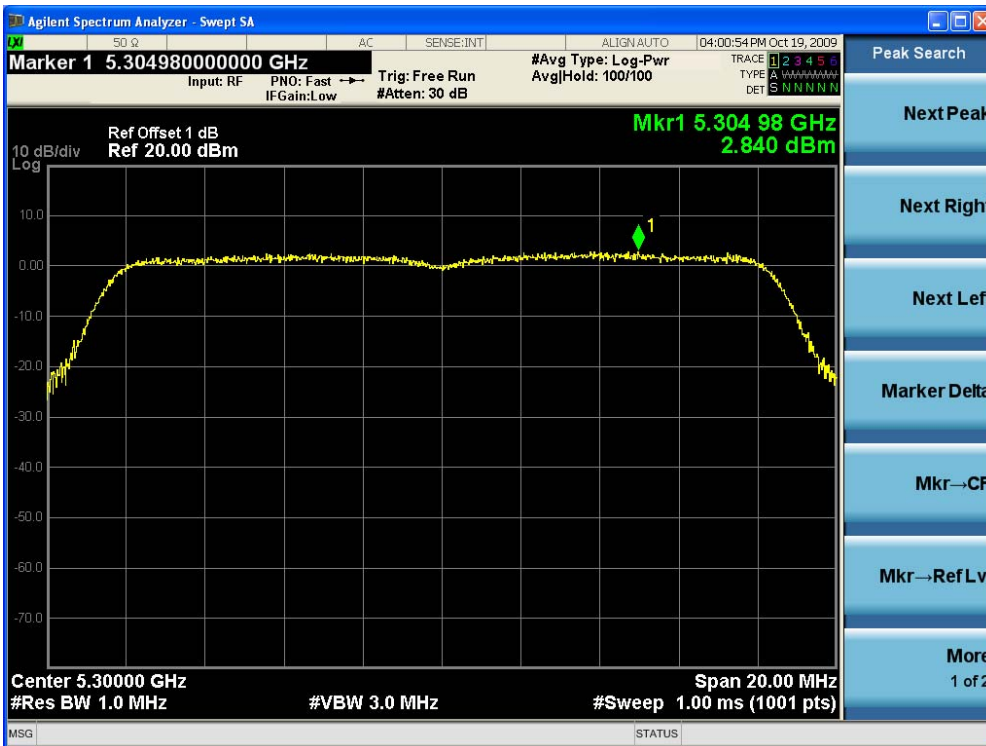


Channel 64 (5320MHz)

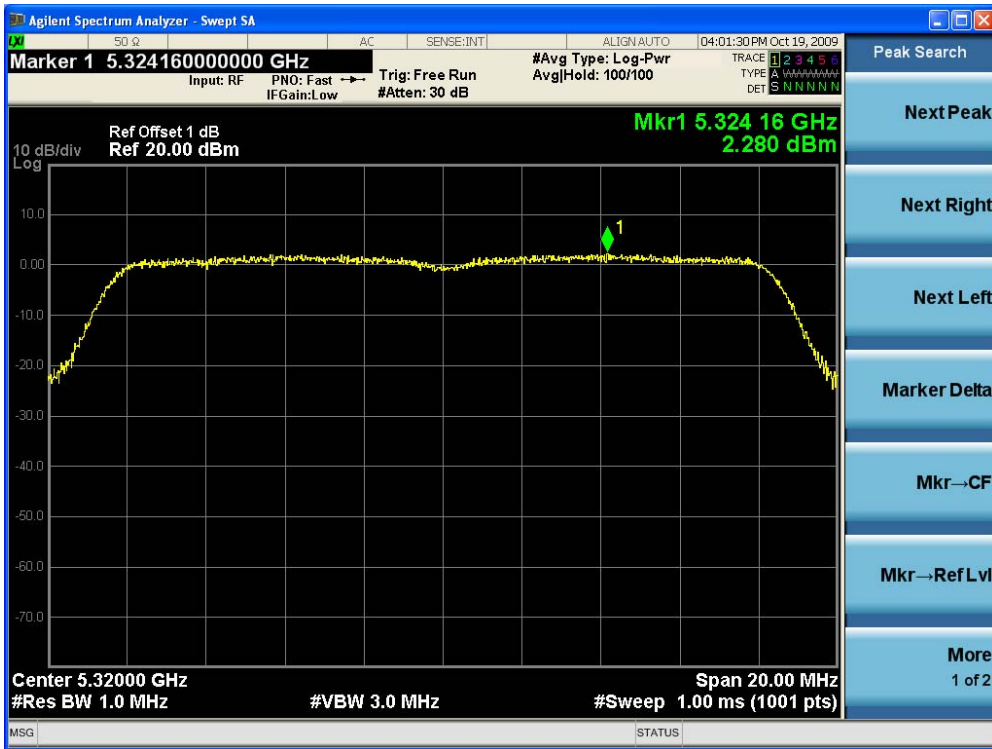


Channel 100 (5500MHz)

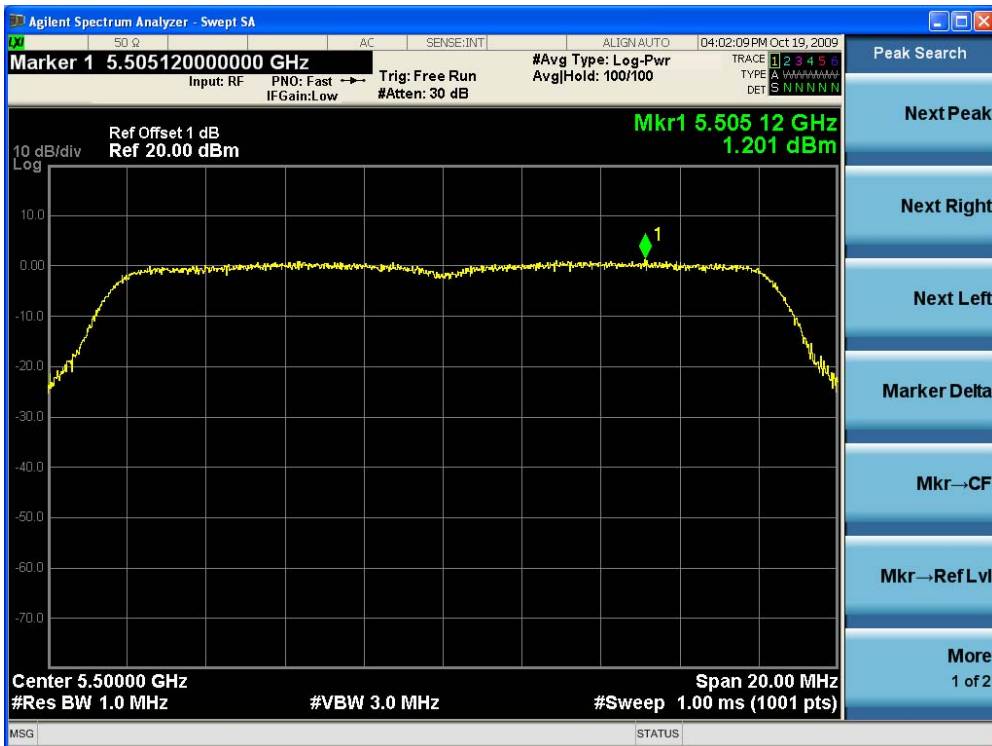

Channel 120 (5600MHz)

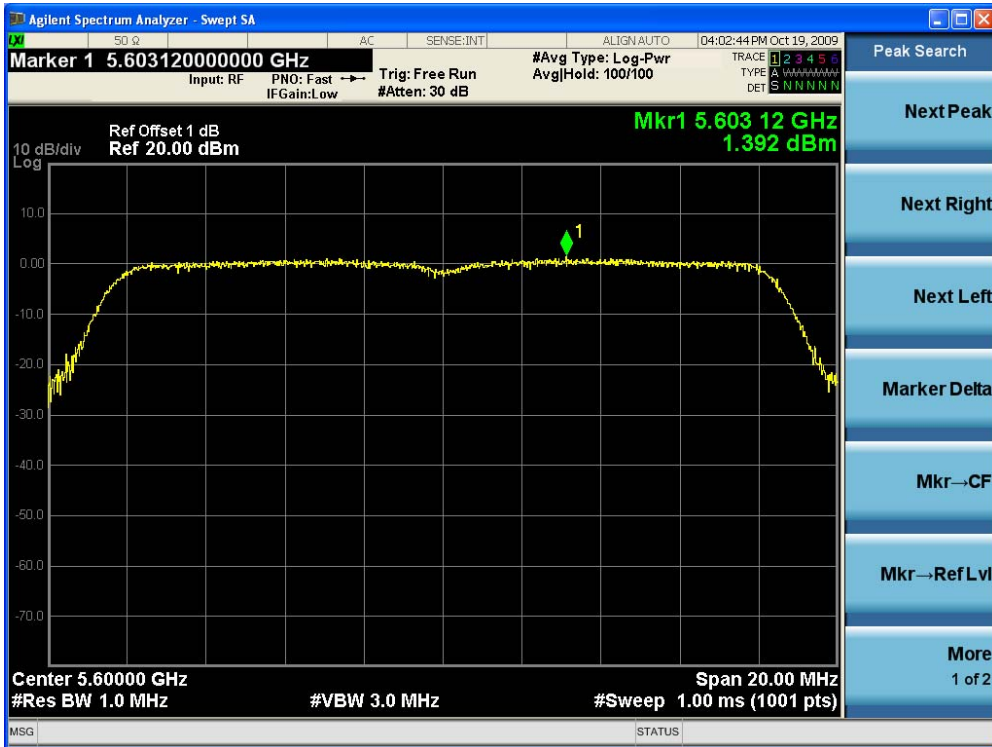


Channel 140 (5700MHz)

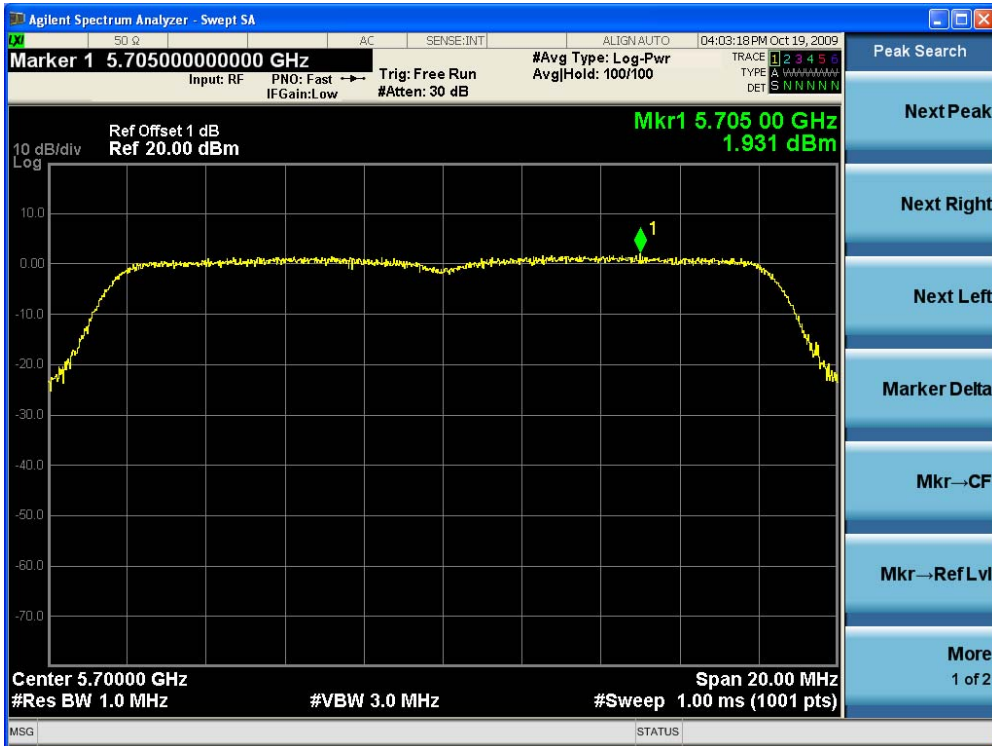


Product	:	802.11a/b/g/n WLAN Module
Test Item	:	Power Output
Test Site	:	AC-6
Test Mode	:	Mode 2: Transmit by 802.11n (20MHz Bandwidth) (Chain 0)

Channel No.	Frequency (MHz)	Measurement PPSD (dBm/MHz)		Total PPSD (dBm/MHz)	Limit (dBm/MHz)	Result
		Chain 0	Chain 1			
36	5180	1.342	N/A	1.342	4	Pass
40	5200	0.777	N/A	0.777	4	Pass
48	5240	1.161	N/A	1.161	4	Pass
52	5260	1.356	N/A	1.356	11	Pass
60	5300	1.902	N/A	1.902	11	Pass
64	5320	1.579	N/A	1.579	11	Pass
100	5500	1.639	N/A	1.639	11	Pass
120	5600	1.117	N/A	1.117	11	Pass
140	5700	2.262	N/A	2.262	11	Pass


Channel 36 (5180MHz)

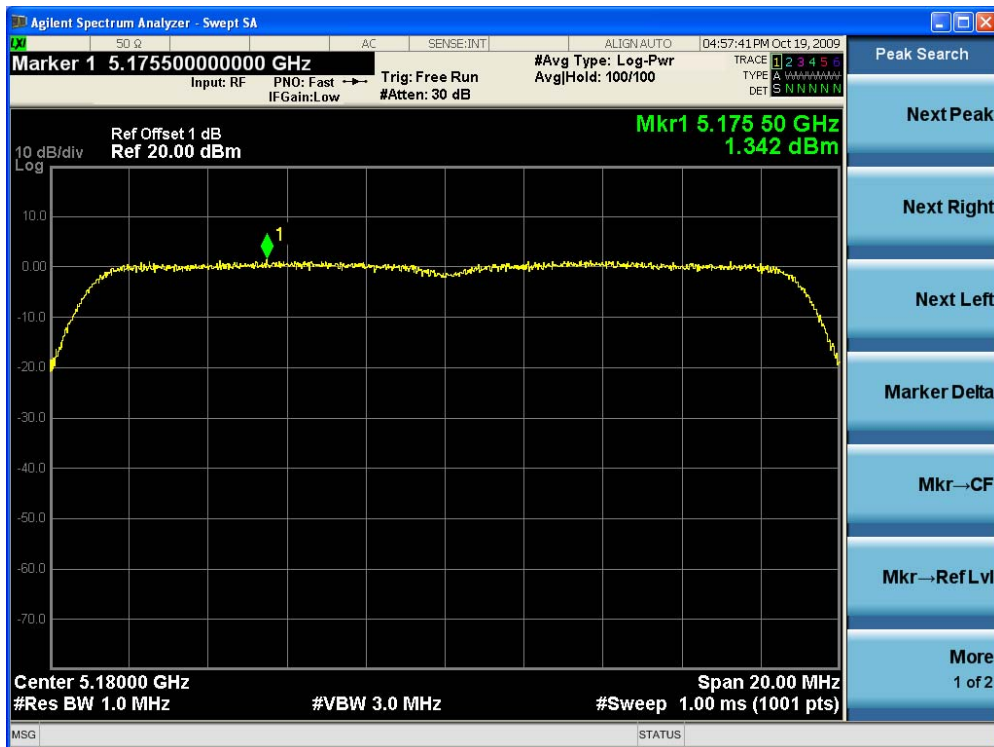


Channel 40 (5200MHz)

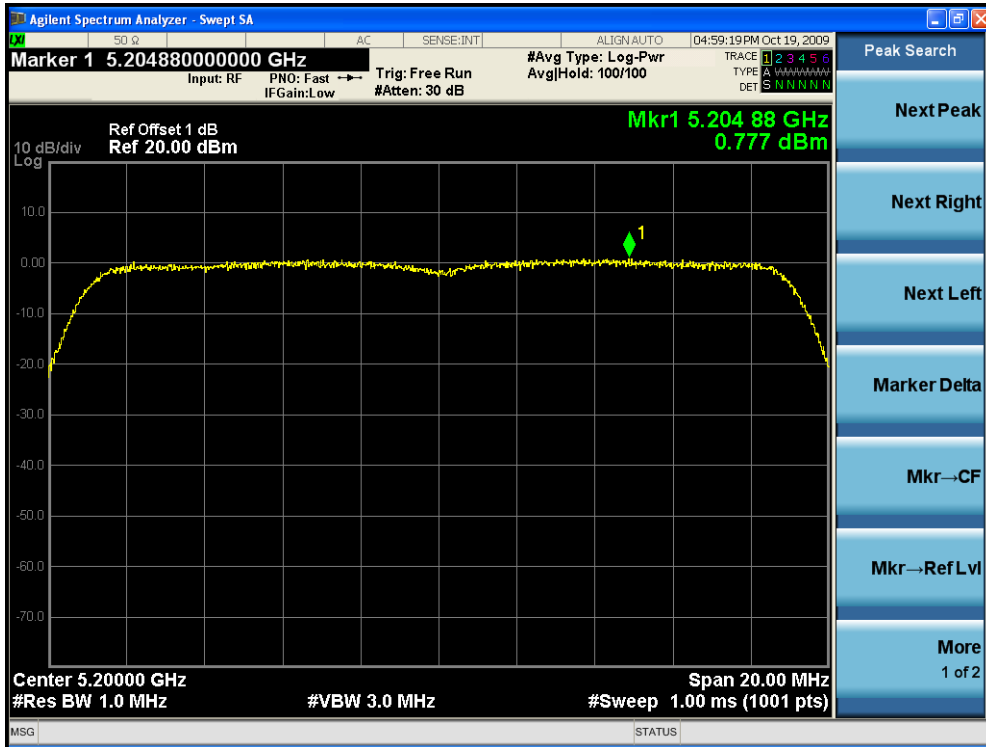


Channel 48 (5240MHz)

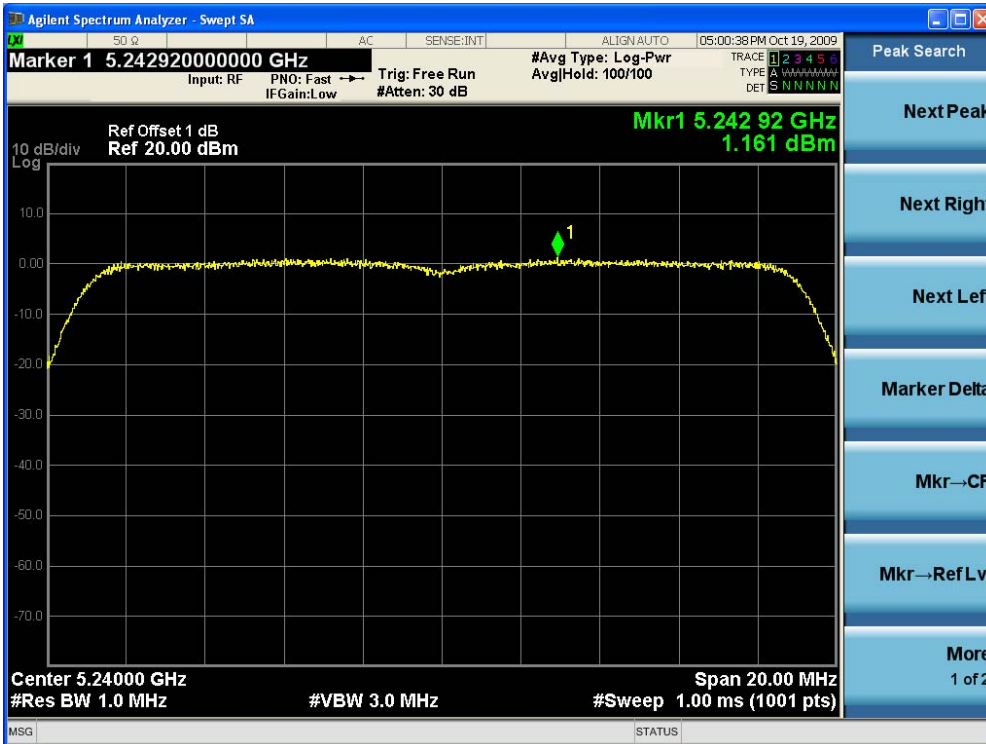

Channel 52 (5260MHz)

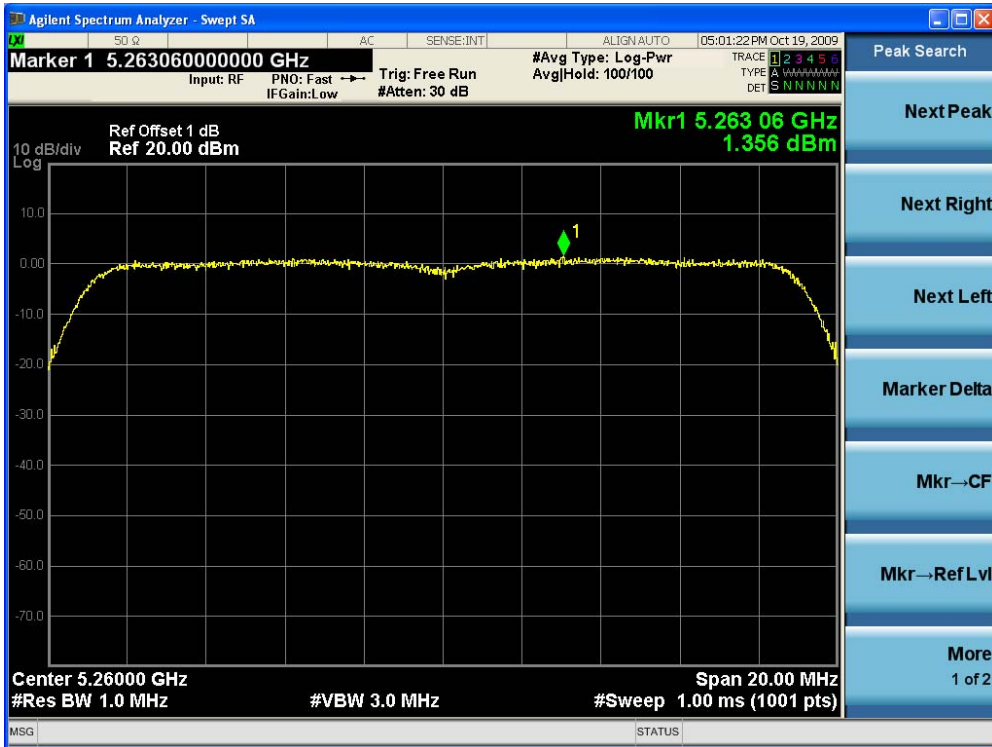

Channel 60 (5300MHz)

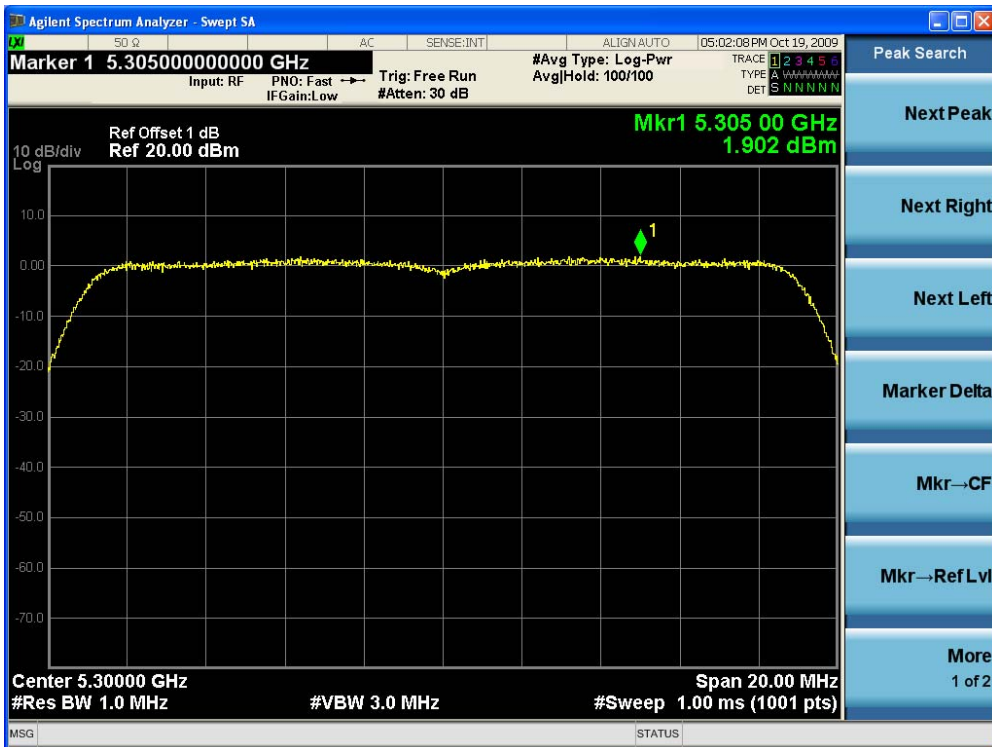


Channel 64 (5320MHz)




Channel 100 (5500MHz)



Channel 120 (5600MHz)

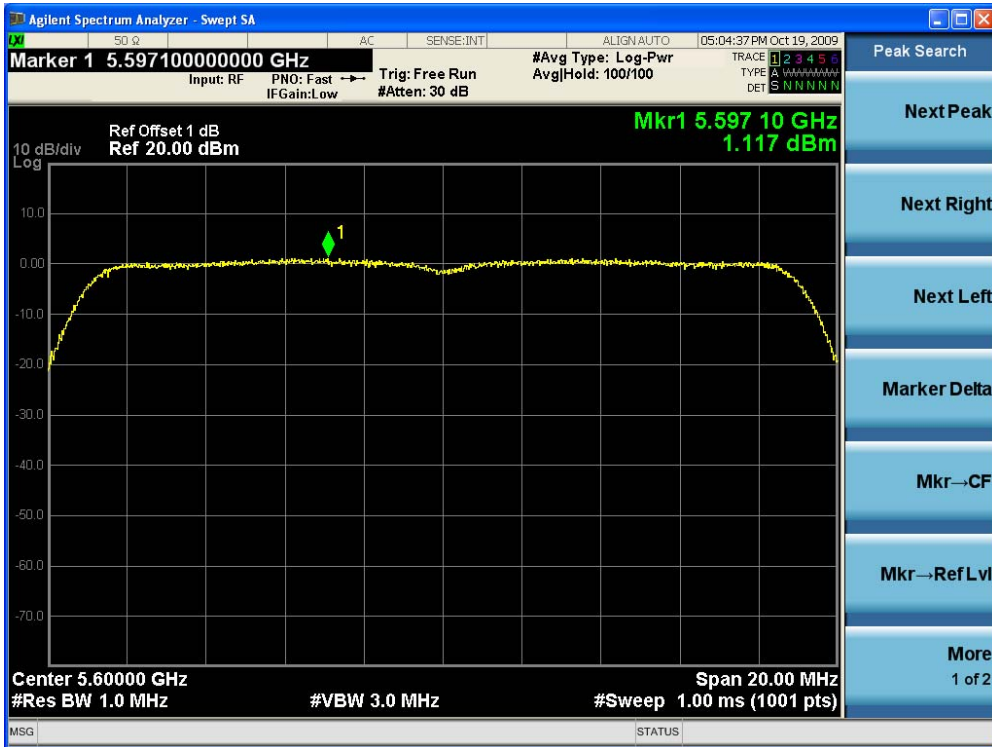


Channel 140 (5700MHz)

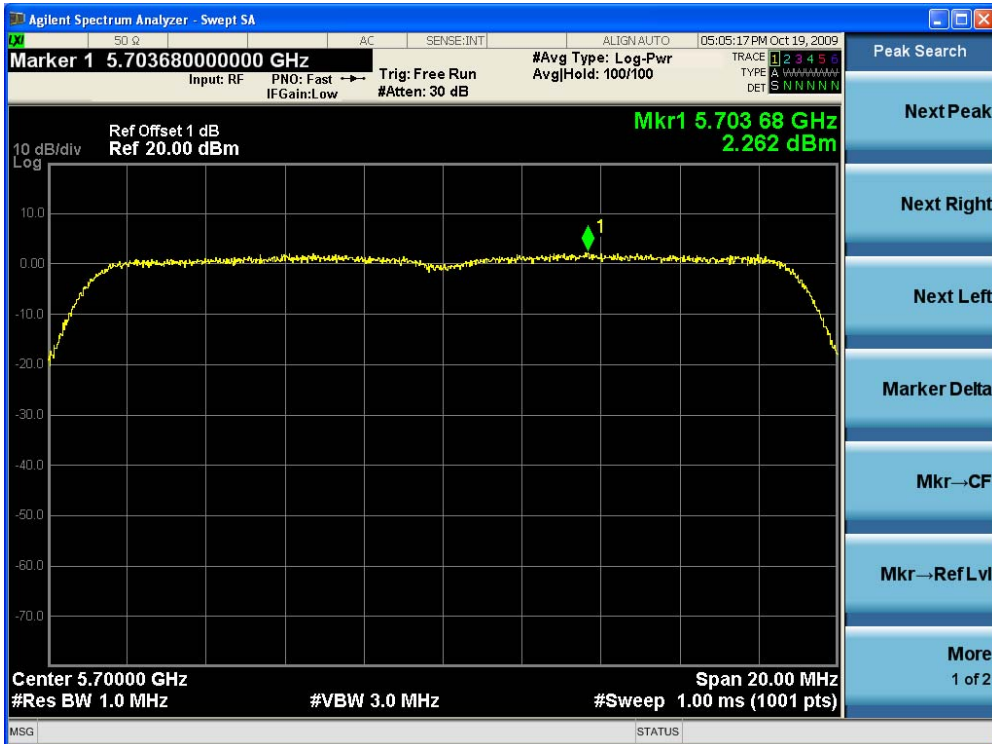


Product	:	802.11a/b/g/n WLAN Module
Test Item	:	Power Output
Test Site	:	AC-6
Test Mode	:	Mode 2: Transmit by 802.11n (20MHz Bandwidth) (Chain 1)

Channel No.	Frequency (MHz)	Measurement PPSD (dBm/MHz)		Total PPSD (dBm/MHz)	Limit (dBm/MHz)	Result
		Chain 0	Chain 1			
36	5180	N/A	2.118	2.118	4	Pass
40	5200	N/A	1.655	1.655	4	Pass
48	5240	N/A	1.709	1.709	4	Pass
52	5260	N/A	2.388	2.388	11	Pass
60	5300	N/A	2.554	2.554	11	Pass
64	5320	N/A	2.511	2.511	11	Pass
100	5500	N/A	1.225	1.225	11	Pass
120	5600	N/A	1.247	1.247	11	Pass
140	5700	N/A	1.600	1.600	11	Pass

Channel 36 (5180MHz)

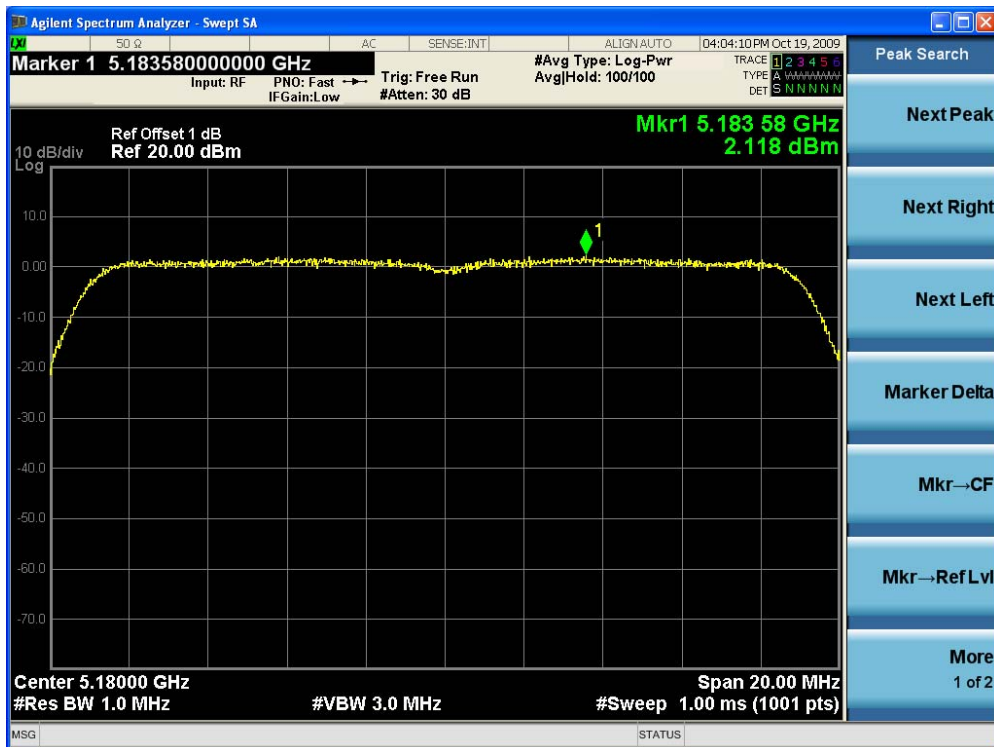


Channel 40 (5200MHz)

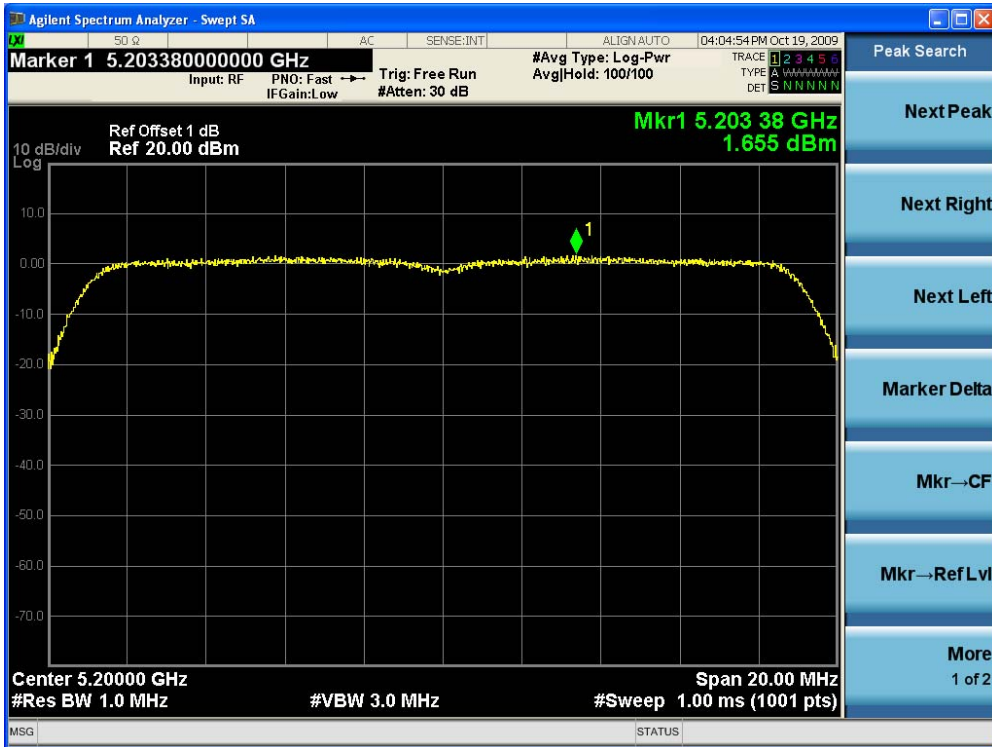


Channel 48 (5240MHz)




Channel 52 (5260MHz)

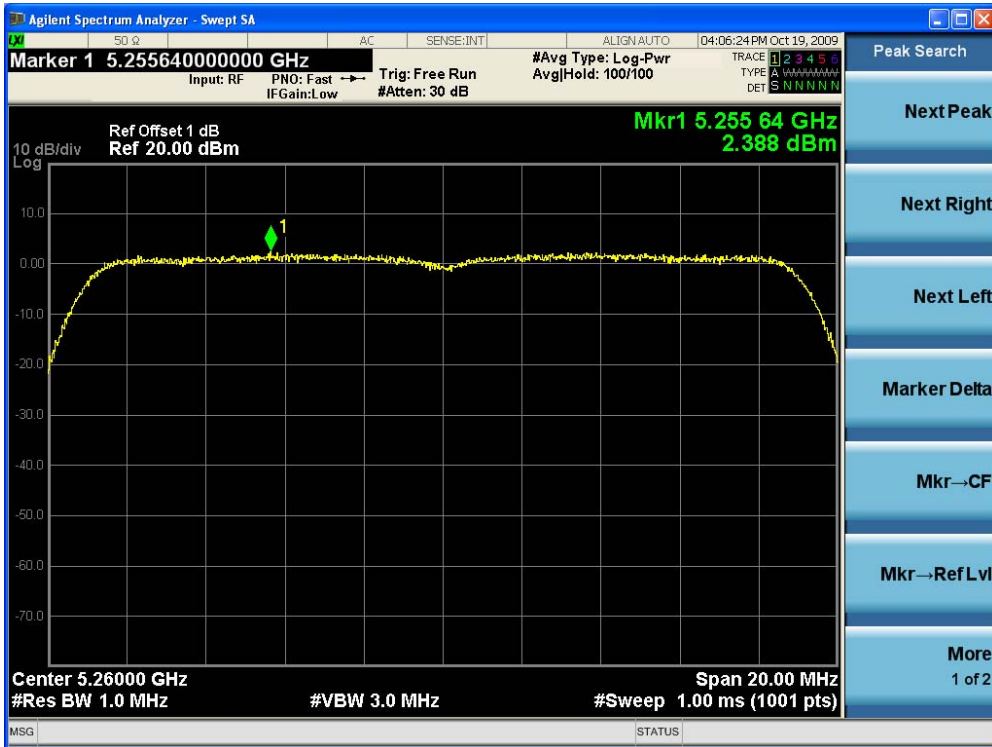


Channel 60 (5300MHz)

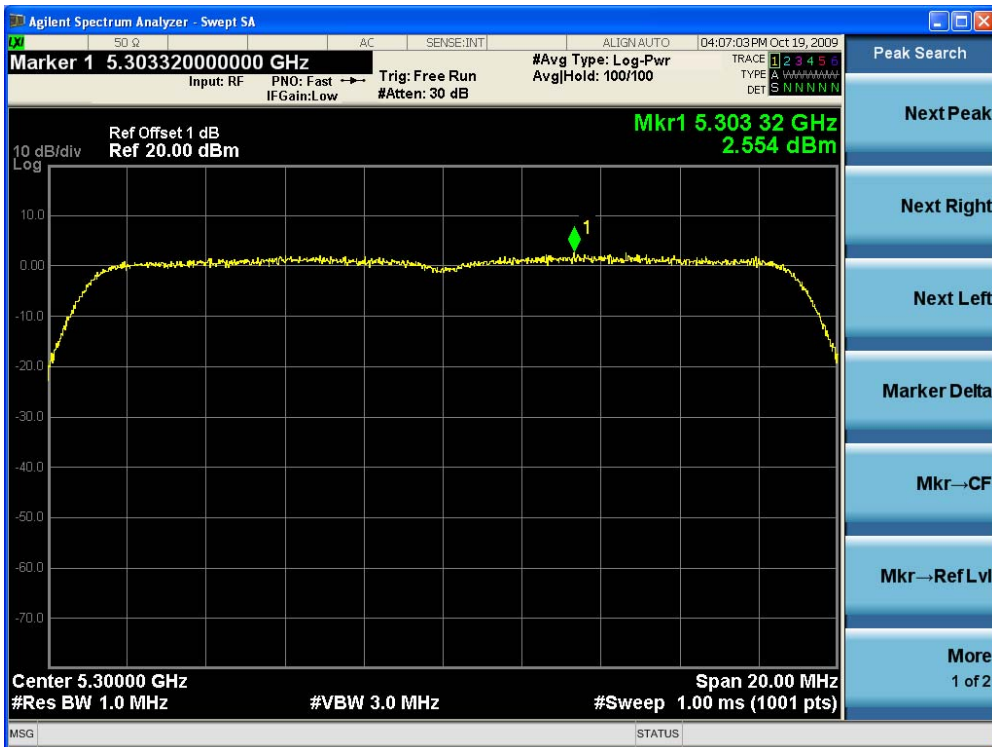


Channel 64 (5320MHz)

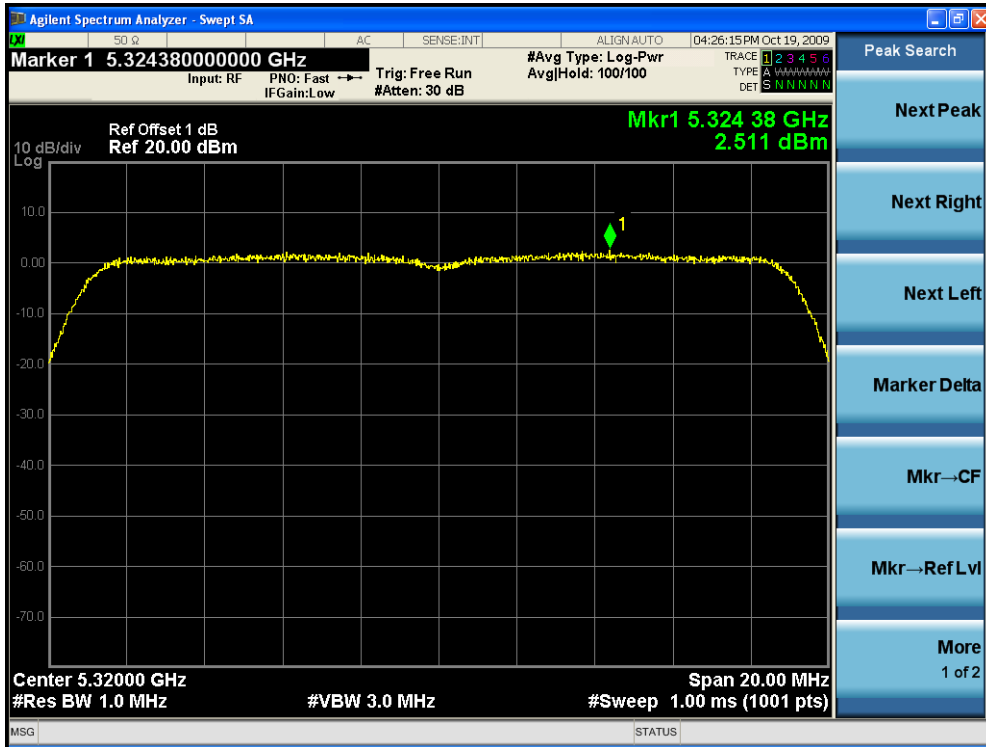


Channel 100 (5500MHz)

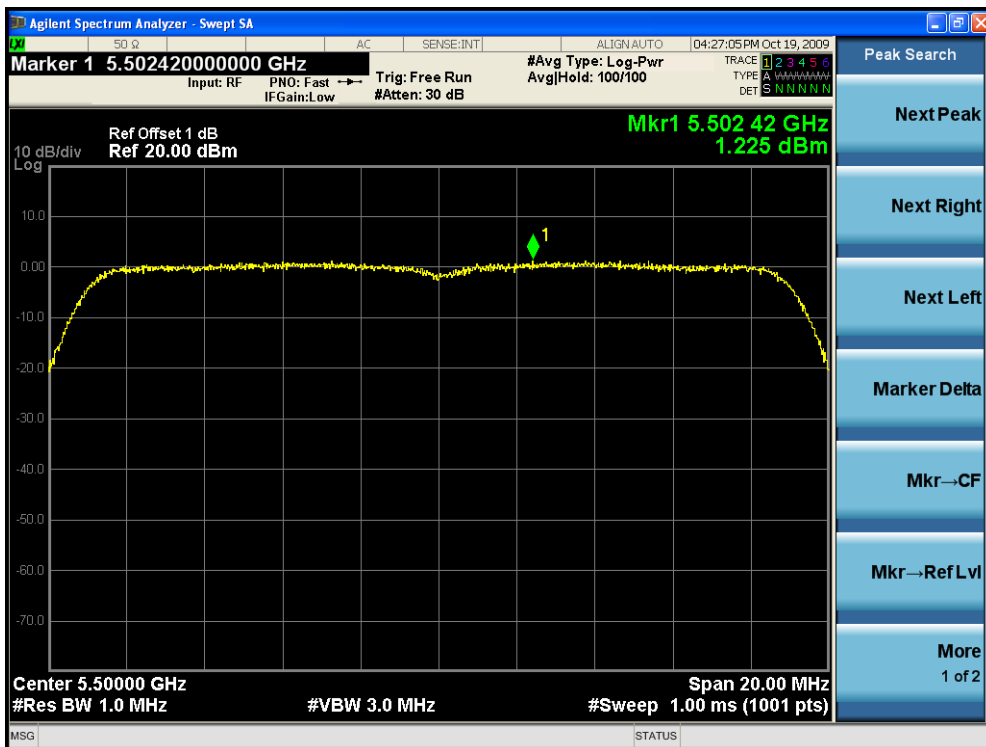

Channel 120 (5600MHz)

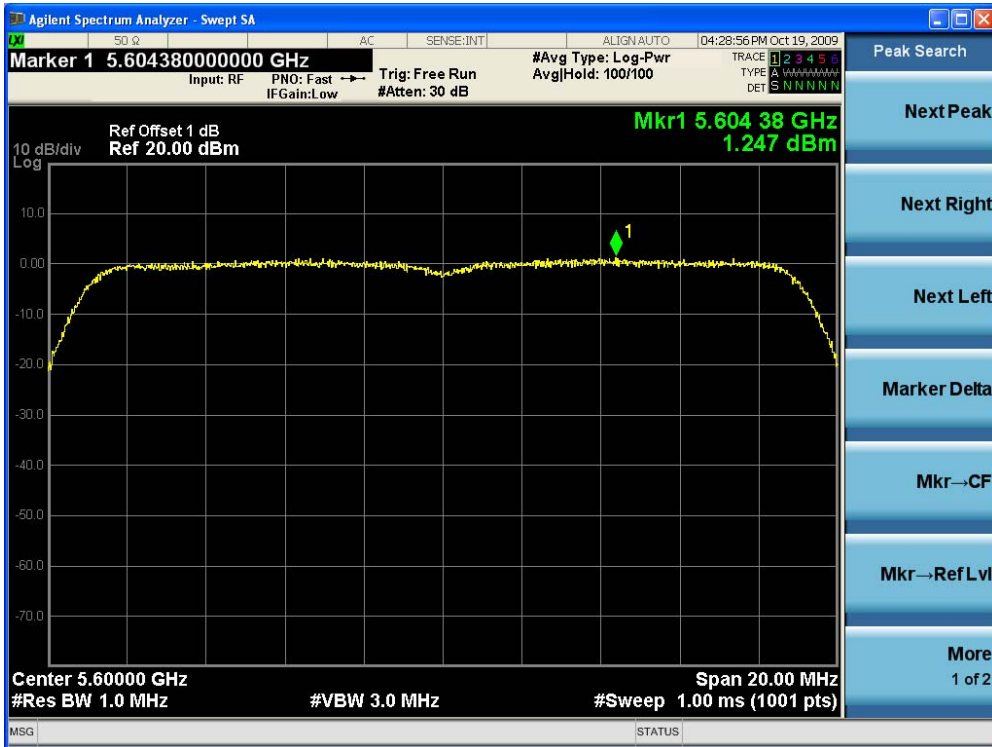


Channel 140 (5700MHz)

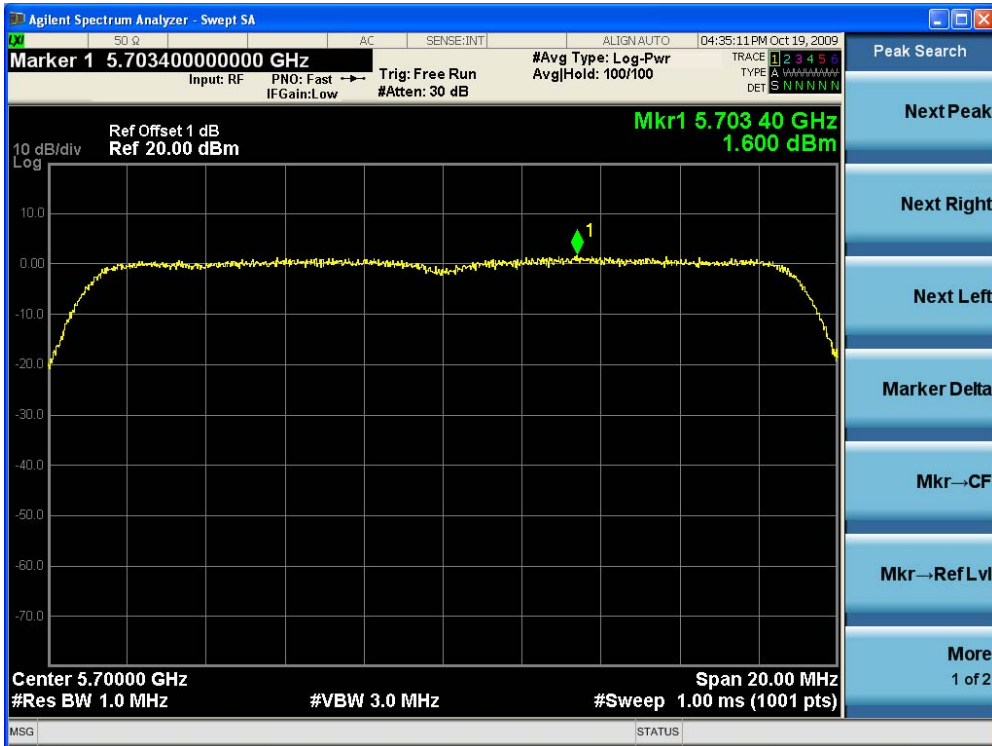


Product	:	802.11a/b/g/n WLAN Module
Test Item	:	Power Output
Test Site	:	AC-6
Test Mode	:	Mode 2: Transmit by 802.11n (20MHz Bandwidth) (Chain 0+1)

Channel No.	Frequency (MHz)	Measurement PPSD (dBm/MHz)		Total PPSD (dBm/MHz)	Limit (dBm/MHz)	Result
		Chain 0	Chain 1			
36	5180	-4.374	-4.082	-1.22	4	Pass
40	5200	-4.535	-4.092	-1.30	4	Pass
48	5240	-4.293	-3.483	-0.86	4	Pass
52	5260	0.878	0.992	3.95	11	Pass
60	5300	0.895	1.647	4.30	11	Pass
64	5320	1.134	1.608	4.39	11	Pass
100	5500	1.223	0.058	3.69	11	Pass
120	5600	0.616	0.679	3.66	11	Pass
140	5700	2.194	1.747	4.99	11	Pass


Channel 36 (5180MHz) - Chain 0

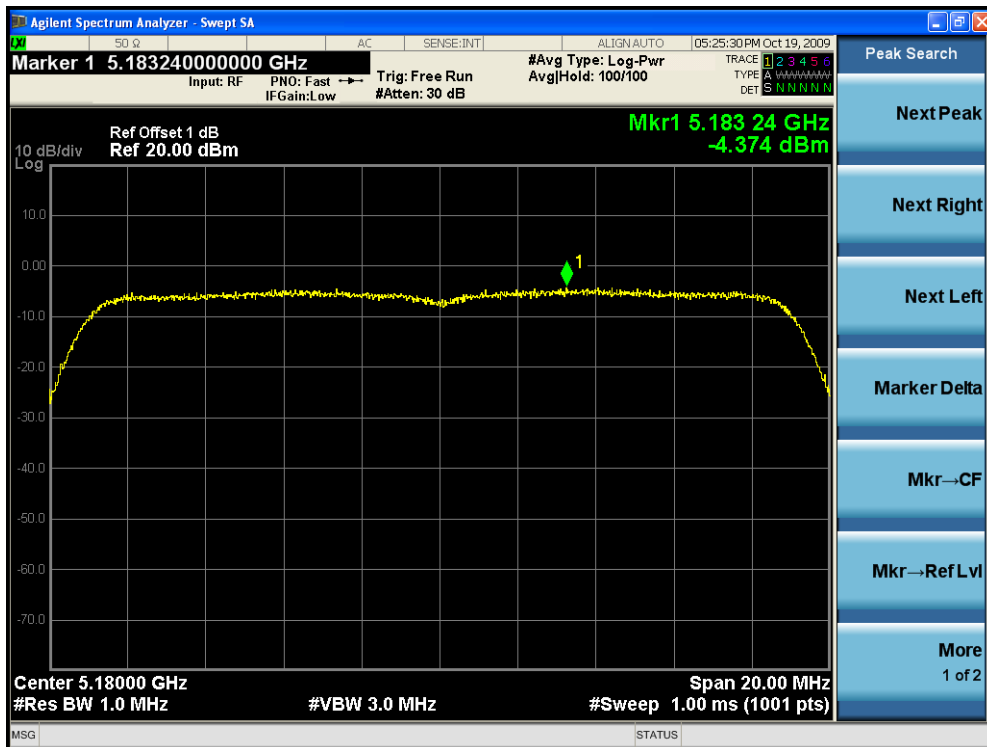


Channel 40 (5200MHz) - Chain 0

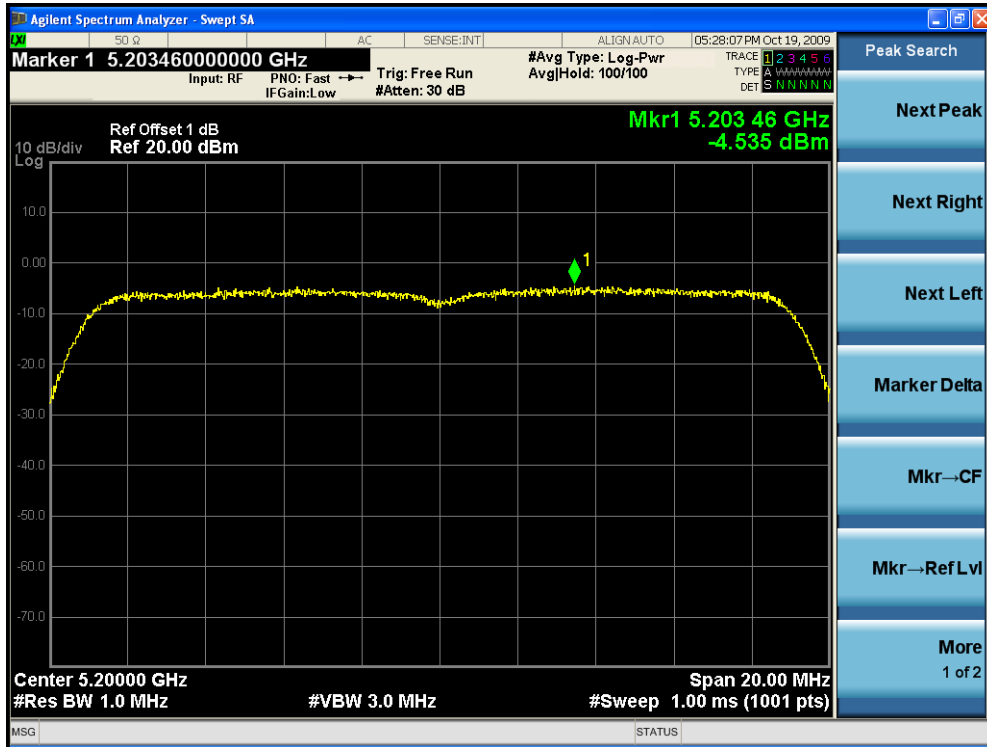

Channel 48 (5240MHz) - Chain 0

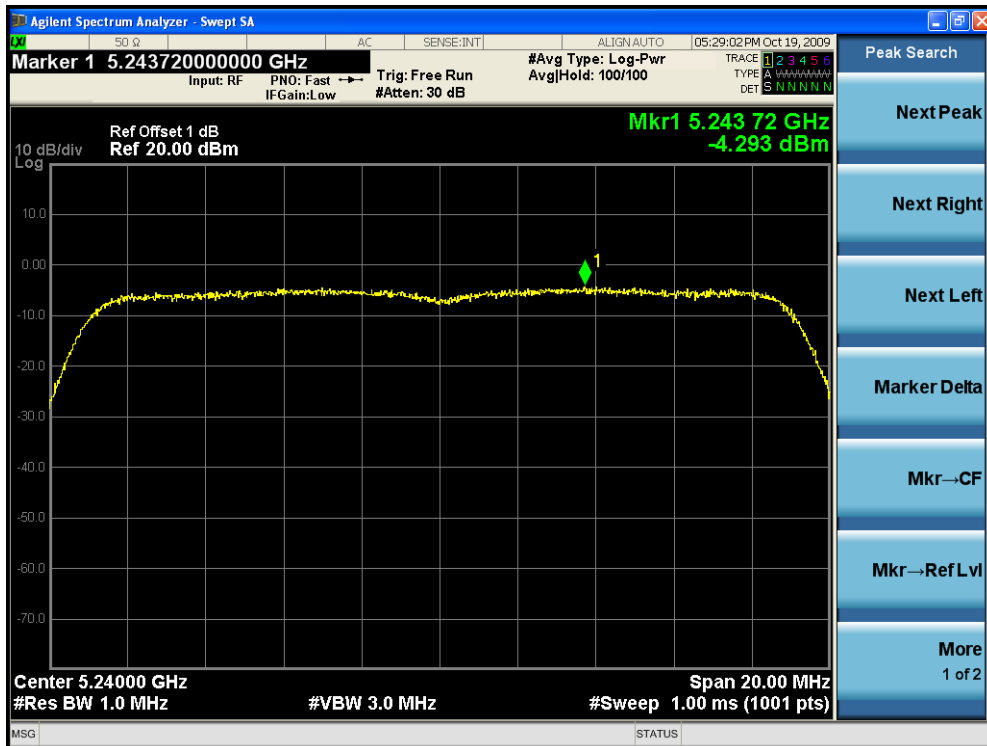


Channel 52 (5260MHz) - Chain 0

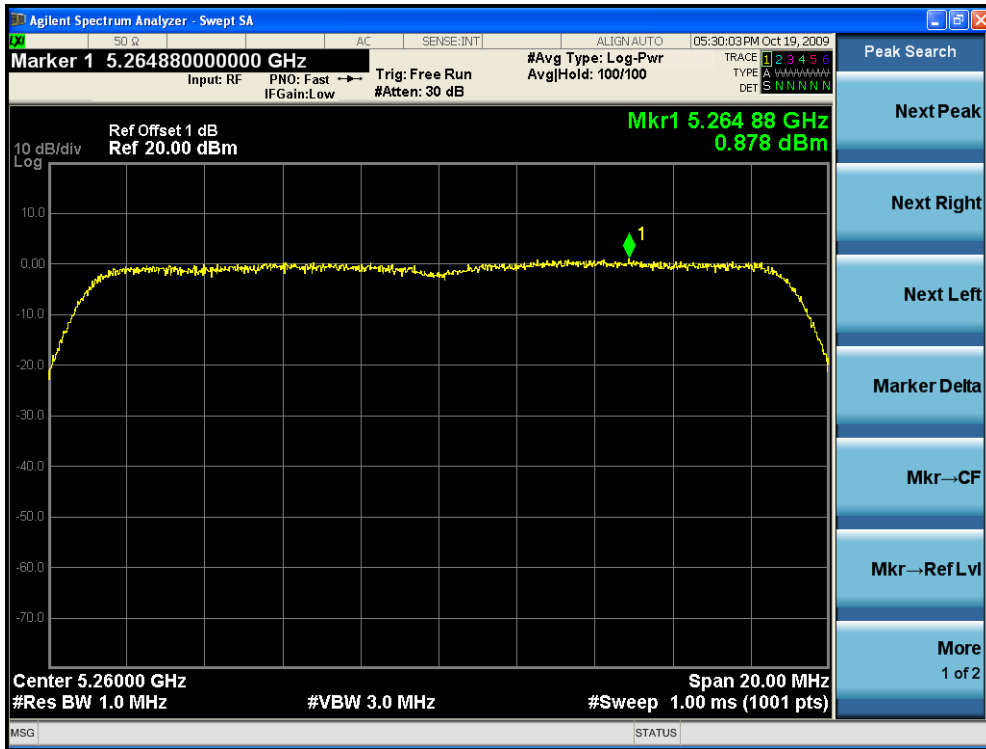


Channel 60 (5300MHz) - Chain 0




Channel 64 (5320MHz) - Chain 0

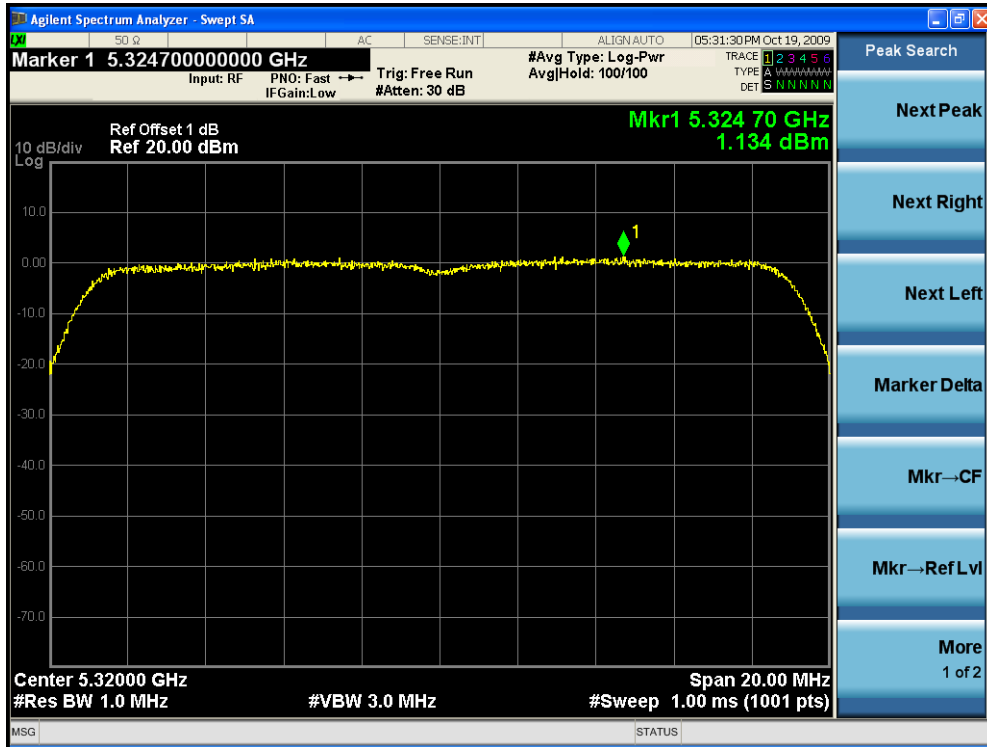


Channel 100 (5500MHz) - Chain 0

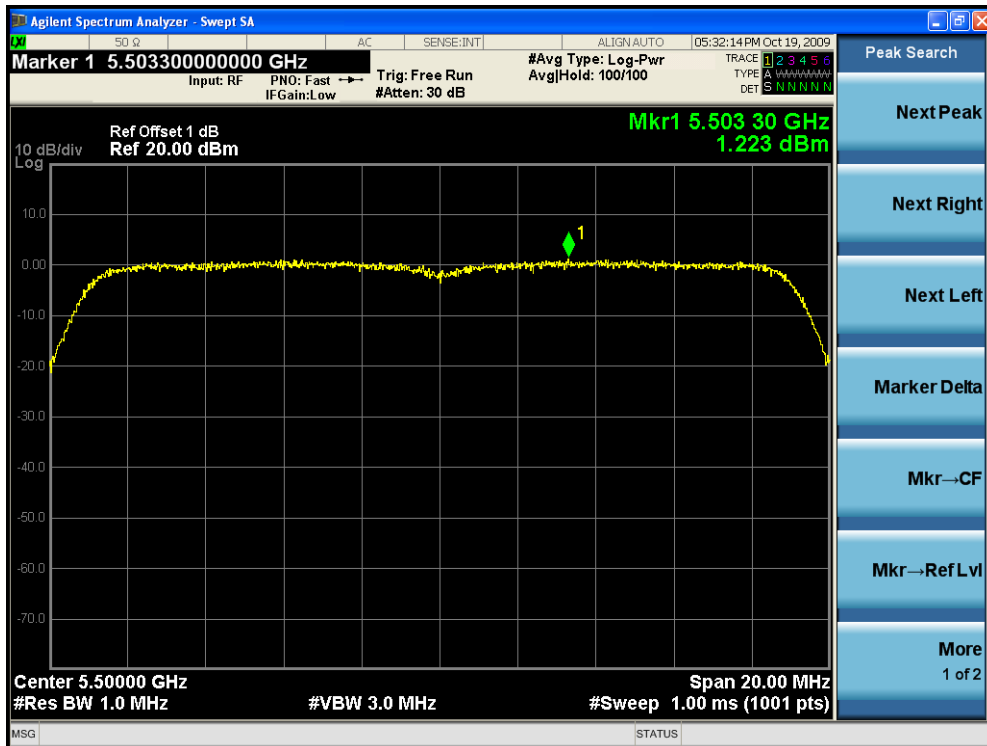


Channel 120 (5600MHz) - Chain 0

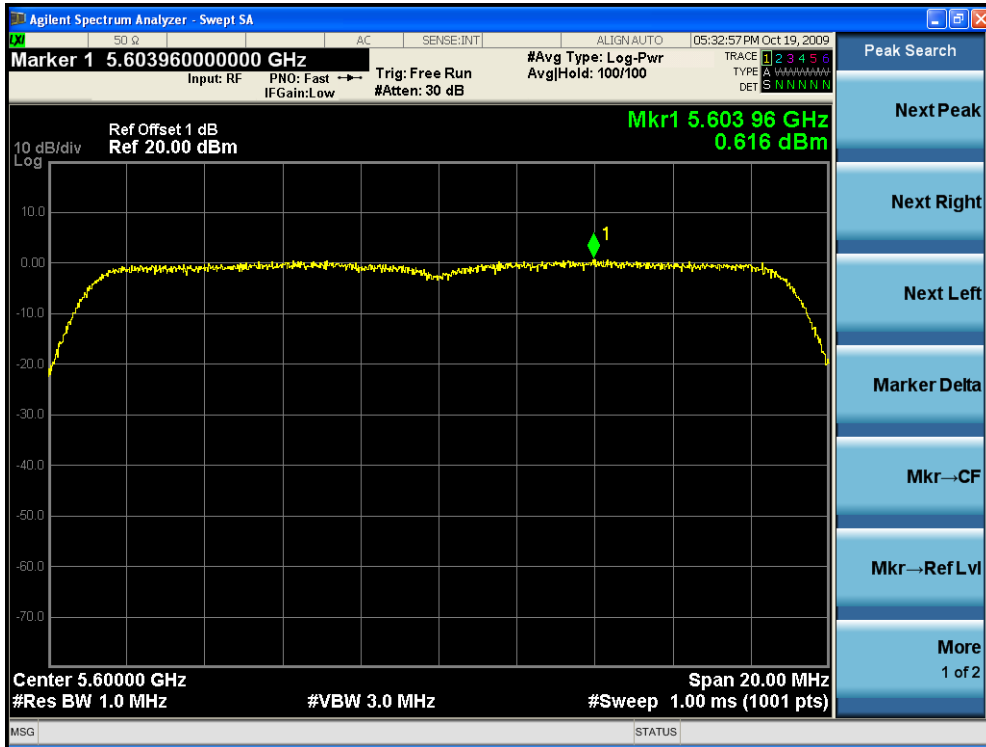


Channel 140 (5700MHz) - Chain 0

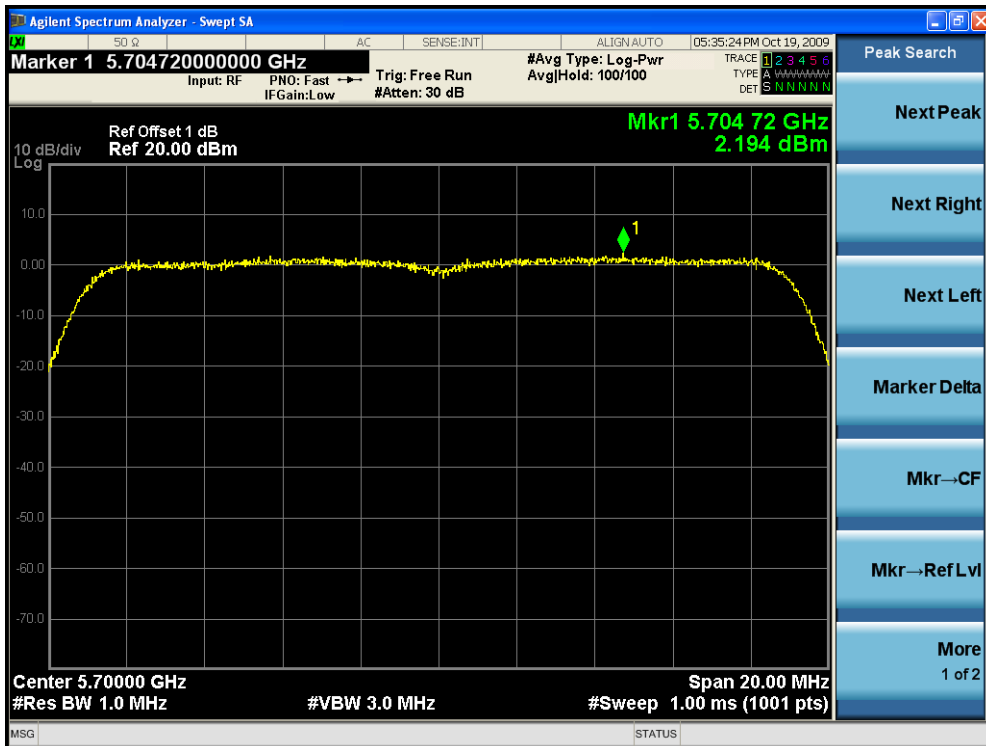


Channel 36 (5180MHz) - Chain 1

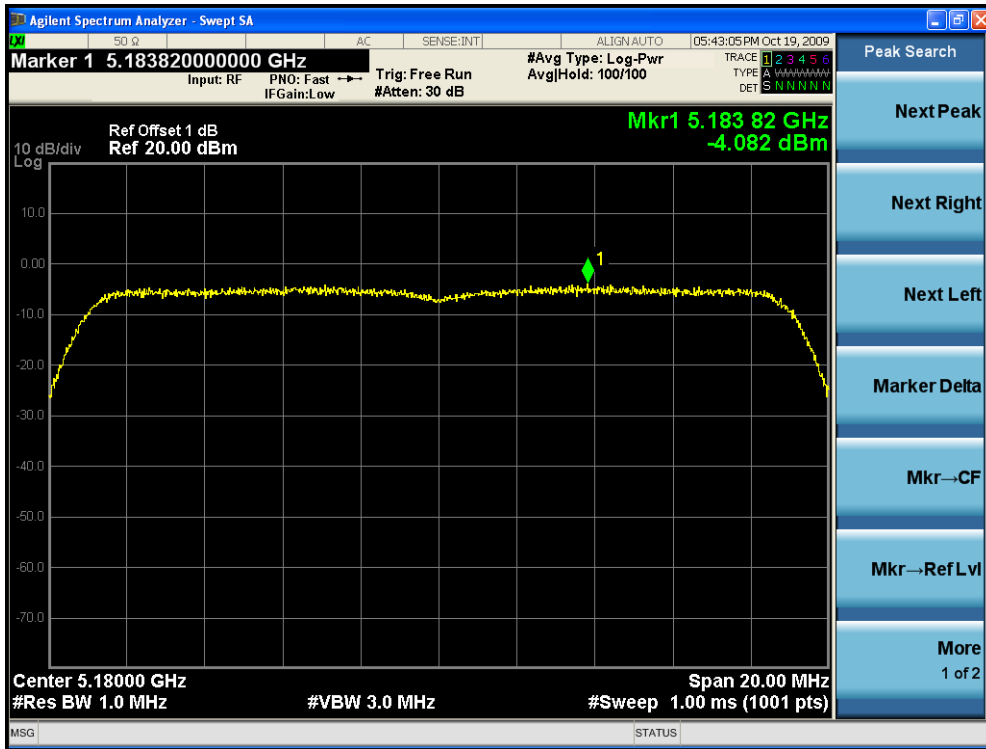


Channel 40 (5200MHz) - Chain 1

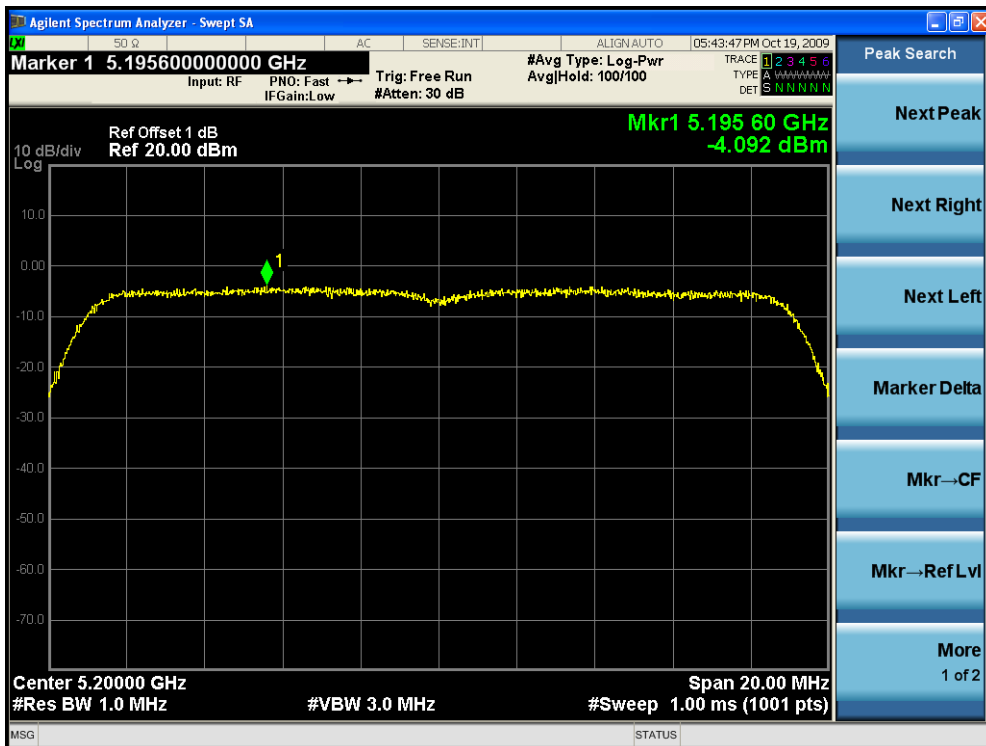

Channel 48 (5240MHz) - Chain 1

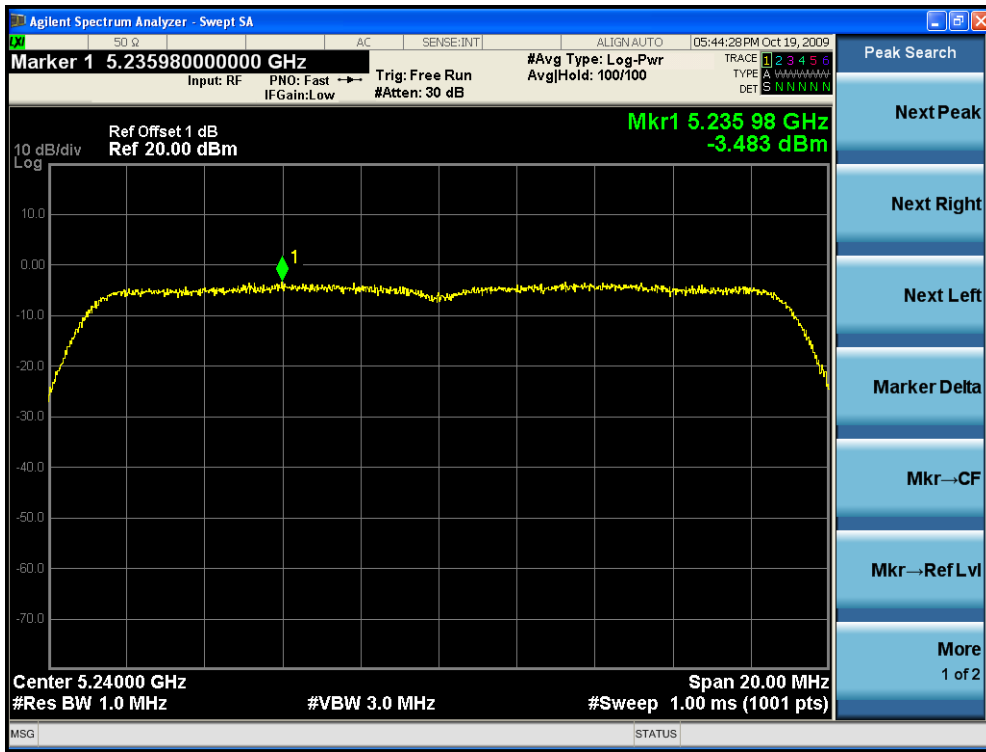


Channel 52 (5260MHz) - Chain 1

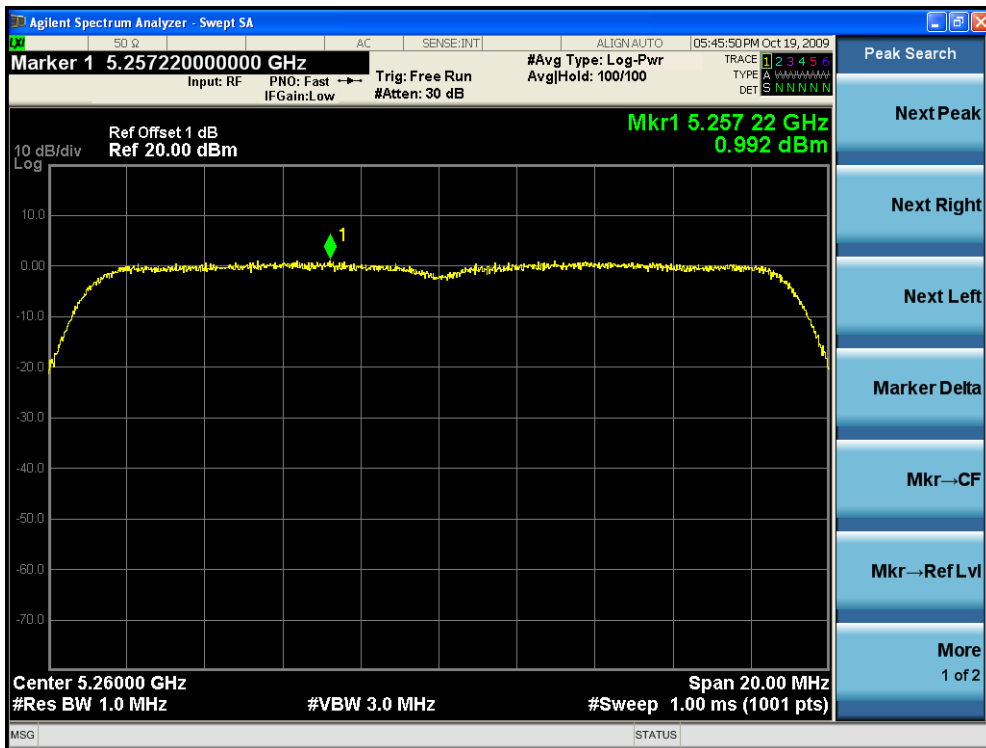


Channel 60 (5300MHz) - Chain 1




Channel 64 (5320MHz) - Chain 1

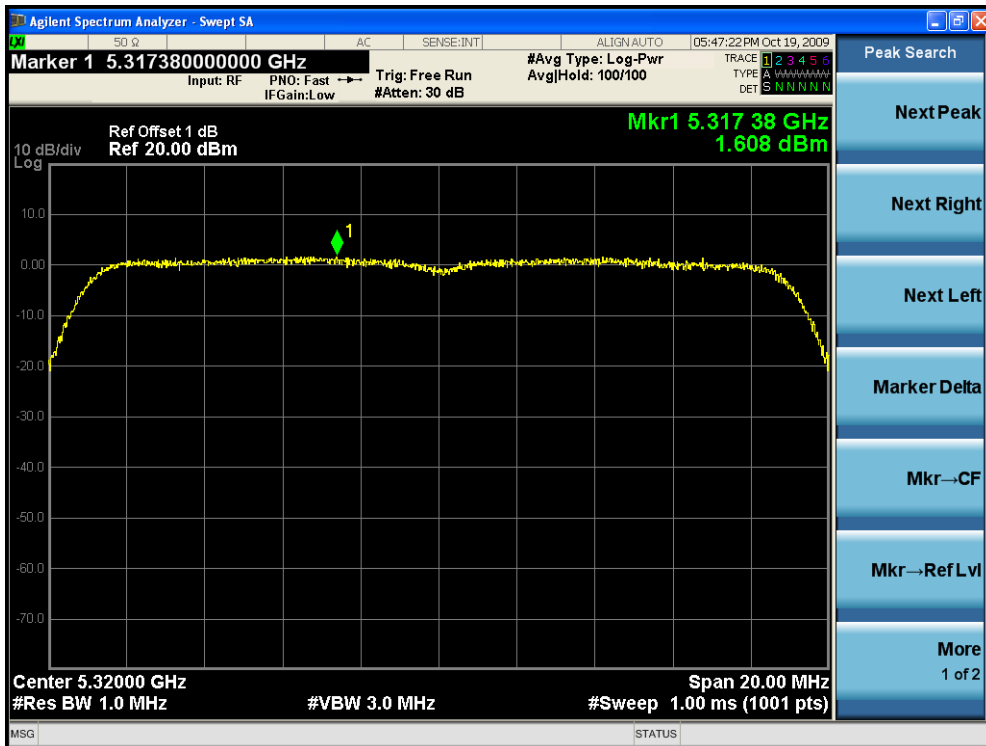


Channel 100 (5500MHz) - Chain 1

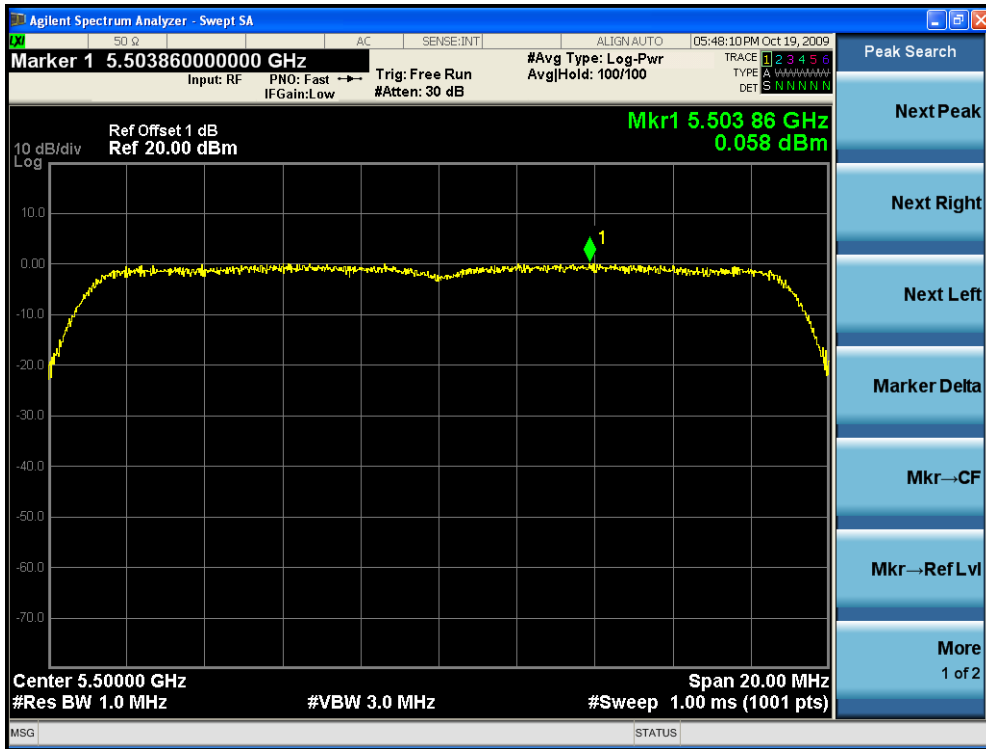

Channel 120 (5600MHz) - Chain 1

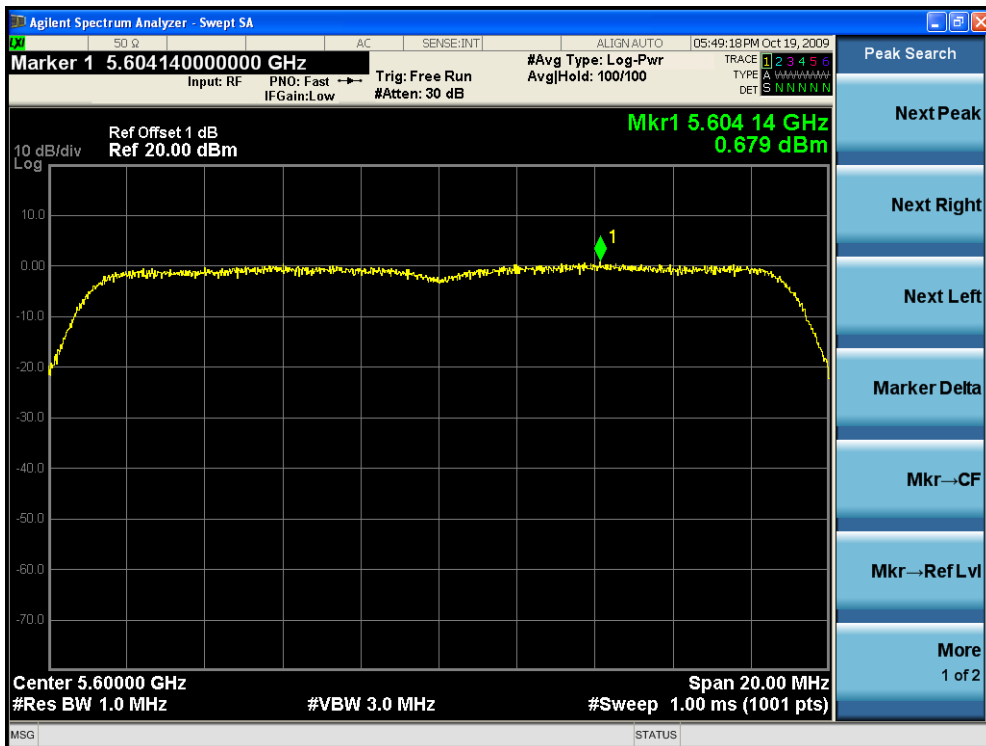

Channel 140 (5700MHz) - Chain 1

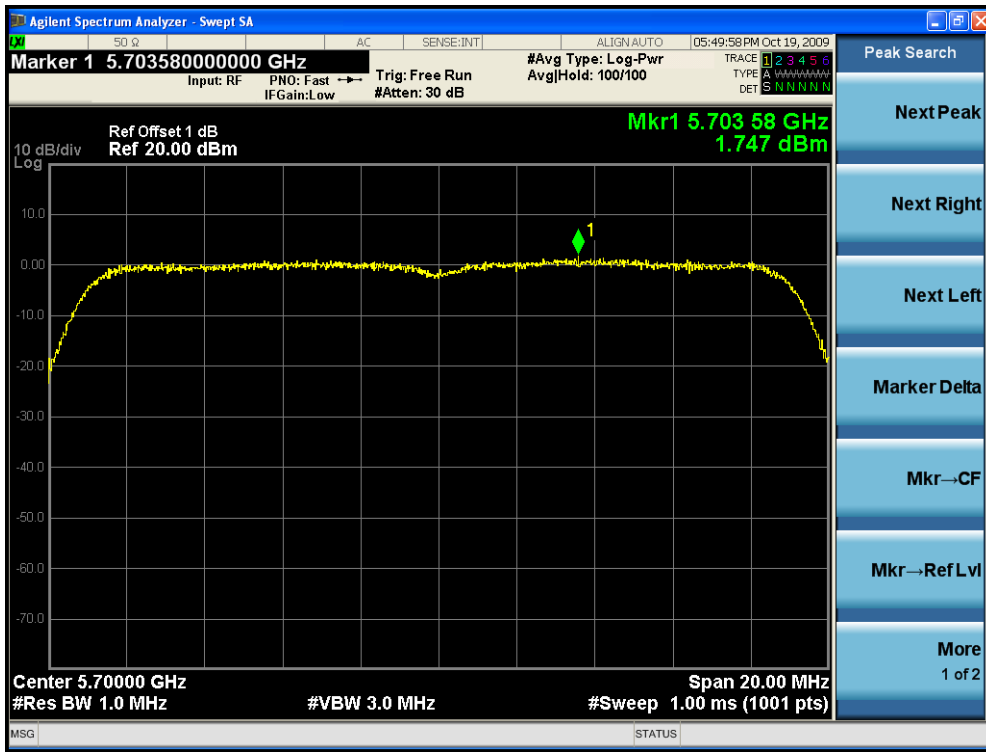

Product	:	802.11a/b/g/n WLAN Module
Test Item	:	Power Output
Test Site	:	AC-6
Test Mode	:	Mode 3: Transmit by 802.11n (40MHz Bandwidth) (Chain 0)

Channel No.	Frequency (MHz)	Measurement PPSD (dBm/MHz)		Total PPSD (dBm/MHz)	Limit (dBm/MHz)	Result
		Chain 0	Chain 1			
38	5190	-3.774	N/A	-3.774	4	Pass
46	5230	-3.575	N/A	-3.575	4	Pass
54	5270	-3.166	N/A	-3.166	11	Pass
62	5310	-3.292	N/A	-3.292	11	Pass
102	5510	-3.397	N/A	-3.397	11	Pass
118	5590	-3.853	N/A	-3.853	11	Pass
134	5670	-3.185	N/A	-3.185	11	Pass

Channel 38 (5190MHz)

