

Report on the FCC and IC Testing of the
Sphinx Electronics GmbH & Co. KG
Model: WRU 200
In accordance with FCC 47 CFR Part 15C and
ISED Canada RSS-210 and ISED Canada RSS-
GEN



Product Service

Choose certainty.
Add value.

Prepared for: Sphinx Electronics GmbH & Co. KG
Tullastr. 3
79341 Kenzingen
Germany

FCC ID: TCN20
IC: 5103A-020

COMMERCIAL-IN-CONFIDENCE

Date: 2019-06-06
Document Number: TR-01330-45142-03 | Issue: 03

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Project Management	Michael Ingerl	2019-06-06	
Authorized Signatory	Matthias Stumpe	2019-06-06	

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Product Service document control rules.

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15C and ISED Canada RSS-210 and ISED Canada RSS-GEN. The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Testing	Michael Ingerl	2019-06-06	

Laboratory Accreditation Laboratory recognition ISED Canada test site registration
DAkKS Reg. No. D-PL-11321-11-02 Registration No. BNetzA-CAB-16/21-15 3050A-2

EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 15C, ISED Canada RSS-210 and ISED Canada RSS-GEN:2016, Issue 09 (08-2016) and Issue 04 (11-2014).

DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD Product Service with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD Product Service. No part of this document may be reproduced without the prior written approval of TÜV SÜD Product Service. © 2019 TÜV SÜD Product Service.

Trade Register Munich
HRB 85742
VAT ID No. DE129484267
Information pursuant to Section 2(1)
DL-InfoV (Germany) at
www.tuev-sued.com/imprint

Managing Directors:
Dr. Peter Havel (CEO)
Dr. Jens Butenandt

Phone: +49 (0) 9421 55 22-0
Fax: +49 (0) 9421 55 22-99
www.tuev-sued.de

TÜV SÜD Product Service GmbH
Äußere Frühlingstraße 45
94315 Straubing
Germany



Contents

1	Report Summary	2
1.1	Report Modification Record.....	2
1.2	Introduction.....	2
1.3	Brief Summary of Results	3
1.4	Product Information	4
1.5	Deviations from the Standard.....	4
1.6	EUT Modification Record	4
1.7	Test Location	4
2	Test Details	5
2.1	Field Strength of any Emission	5
2.2	Frequency Tolerance Under Temperature Variations.....	10
2.3	20 dB Bandwidth	12
2.4	Restricted Band Edges.....	15
2.5	AC Power Line Conducted Emissions	17
2.6	Exposure of Humans to RF Fields and SAR exclusion threshold.....	21
3	Photographs	26
3.1	Equipment Under Test (EUT).....	26
4	Test Equipment Information	31
4.1	General Test Equipment Used.....	31
5	Measurement Uncertainty	32



1 Report Summary

1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	2018-11-26
2	Changed Software Versions to Hardware Versions	2018-12-14
3	Changed the Separation distance between the user from above 20cm to under 20cm, Added SAR evaluation, Changed from "Industry Canada" to "ISED Canada"	2019-06-06

Table 1

1.2 Introduction

Applicant	Sphinx Electronics GmbH & Co. KG
Manufacturer	Sphinx Electronics GmbH & Co. KG
Model Number(s)	WRU 200
Serial Number(s)	---
Hardware Version(s)	SWS-71 v1.1 (IO and Power supply) SAS-40 v1.1 (Antenna) SWS-81 v1.0 (Controller and RFID)
Software Version(s)	---
Number of Samples Tested	1
Test Specification/Issue/Date	FCC 47 CFR Part 15C, ISED Canada RSS-210 and ISED Canada RSS-GEN:2016, Issue 09 (08-2016) and Issue 04 (11-2014), FCC rule Part 2.1093, KDB 447498 D01, RSS-102 Issue 5
Test Plan/Issue/Date	---
Order Number	926541
Date	2018-10-23
Date of Receipt of EUT	2018-11-19
Start of Test	2018-11-20
Finish of Test	2018-11-22
Name of Engineer(s)	Michael Ingerl
Related Document(s)	ANSI C63.10 (2013) ANSI C63.4 (2014)



1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15C and ISED Canada RSS-210, ISED Canada RSS-GEN, FCC rule Part 2.1093, KDB 447498 D01 and RSS-102 Issue 5 is shown below.

Section	Specification Clause	Test Description	Result	Comments/Base Standard
Configuration and Mode: 12 V DC power supply - Transmitting continuously				
2.1	15.225 (a)(b)(c)(d), B.1 to B.9, 6.4 and 6.5.	Field Strength of any Emission	Pass	ANSI C63.10 (2013)
2.2	15.225 (e), B.1 to B.9 and 6.11.	Frequency Tolerance Under Temperature Variations	Pass	ANSI C63.10 (2013)
2.3	15.215 (c), N/A and 6.6	20 dB Bandwidth	Pass	ANSI C63.10 (2013)
2.4	15.205, 4.1 and 8.10	Restricted Band Edges	Pass	ANSI C63.10 (2013)
2.5	15.207 and 8.8	AC Power Line Conducted Emissions	Pass	ANSI C63.10 (2013)
2.6	15.107 and 6.1	Exposure of Humans to RF Fields and SAR exclusion threshold	Pass	ANSI C63.4 (2014)

Table 2



1.4 Product Information

1.4.1 Technical Description

Wall Terminal. Use as authorization reader, block lock function for controlling any type of door, gates, car park barriers, furniture and furnishings, lights, alarm systems, video surveillance.

Wall-Terminal WT 200 system consisting of:

- Wall-Reading-Unit WRU 200 (radio equipment + RS485)
- Wall-Terminal-Controller WTC 200 [Ethernet + RS485]

I/O Extensions:

- Wall-Terminal-Extension WTX 200 [mounted on WTC 200]
- Wall-Terminal-Extension WTX 201 [RS485]

1.5 Deviations from the Standard

None

1.6 EUT Modification Record

The table below details modifications made to the EUT during the test programme. The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
0	As supplied by the customer	Not Applicable	Not Applicable

Table 3

1.7 Test Location

TÜV SÜD Product Service conducted the following tests at our Straubing Test Laboratory.

Test Name	Name of Engineer(s)
Configuration and Mode: 12 V DC power supply - Transmitting continuously	
Field Strength of any Emission	Michael Ingerl
Frequency Tolerance Under Temperature Variations	Michael Ingerl
20 dB Bandwidth	Michael Ingerl
Restricted Band Edges	Michael Ingerl
AC Power Line Conducted Emissions	Michael Ingerl
Exposure of Humans to RF Fields and SAR exclusion threshold	Michael Ingerl

Table 4

Office Address:

Äußere Frühlingstraße 45
 94315 Straubing
 Germany



2 Test Details

2.1 Field Strength of any Emission

2.1.1 Specification Reference

FCC 47 CFR Part 15C, ISED Canada RSS-210 and ISED Canada RSS-GEN, Clause 15.225 (a)(b)(c)(d), B.1 to B.9, 6.4 and 6.5.

2.1.2 Equipment Under Test and Modification State

WRU 200, S/N: --- - Modification State 0

2.1.3 Date of Test

2018-11-20

2.1.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 6.3, 6.4 and 6.5.

Measurements were made at a distance of 3 m. The limit lines shown on the plot were extrapolated from either 300 m or 30 m to the measurement distance of 3 m in accordance with ANSI C63.10 Clause 6.4.4.2.

2.1.5 Environmental Conditions


Ambient Temperature	22,0 °C
Relative Humidity	30,0 %

2.1.6 Test Results

12 V DC power supply - Transmitting continuously




Frequency MHz	Quasi-Peak Level (dBµV/m) at 10 m	Quasi-Peak Level (dBµV/m) at 30 m
13.56	43.0	23.9

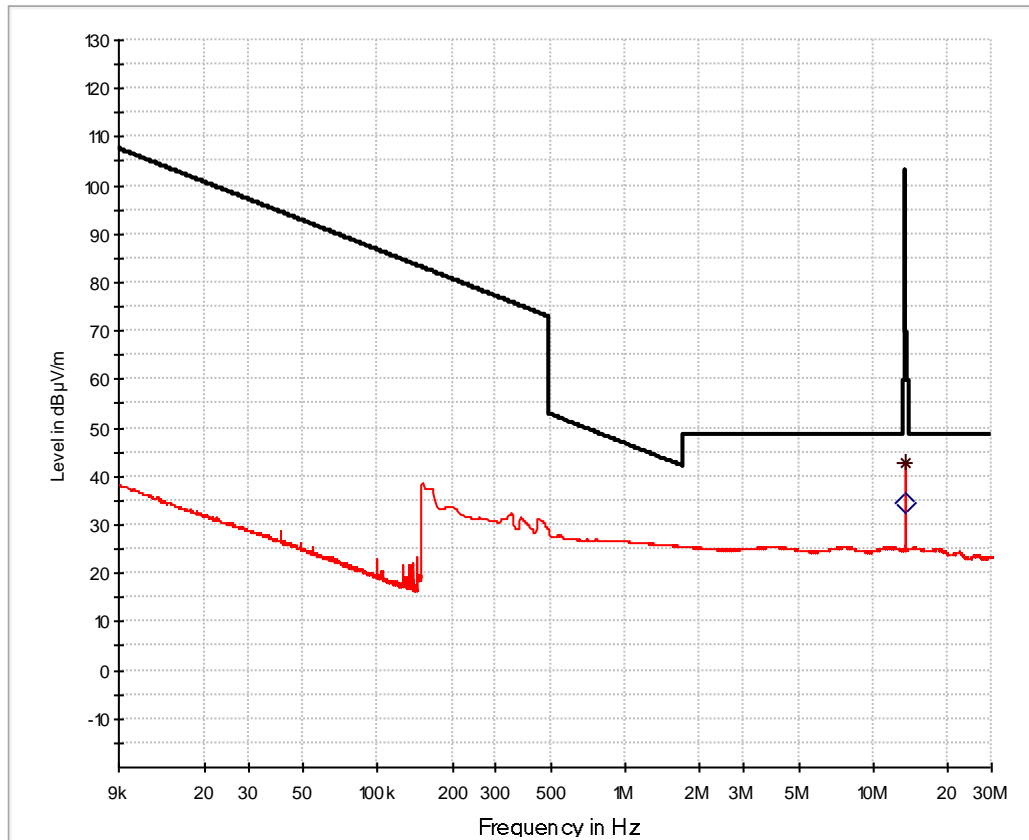

— Preview Result 1-QPK — FCC 15.225 mag (10 m)
* Final_Result QP K ◇ Final_Result CA V

9 kHz to 30 MHz

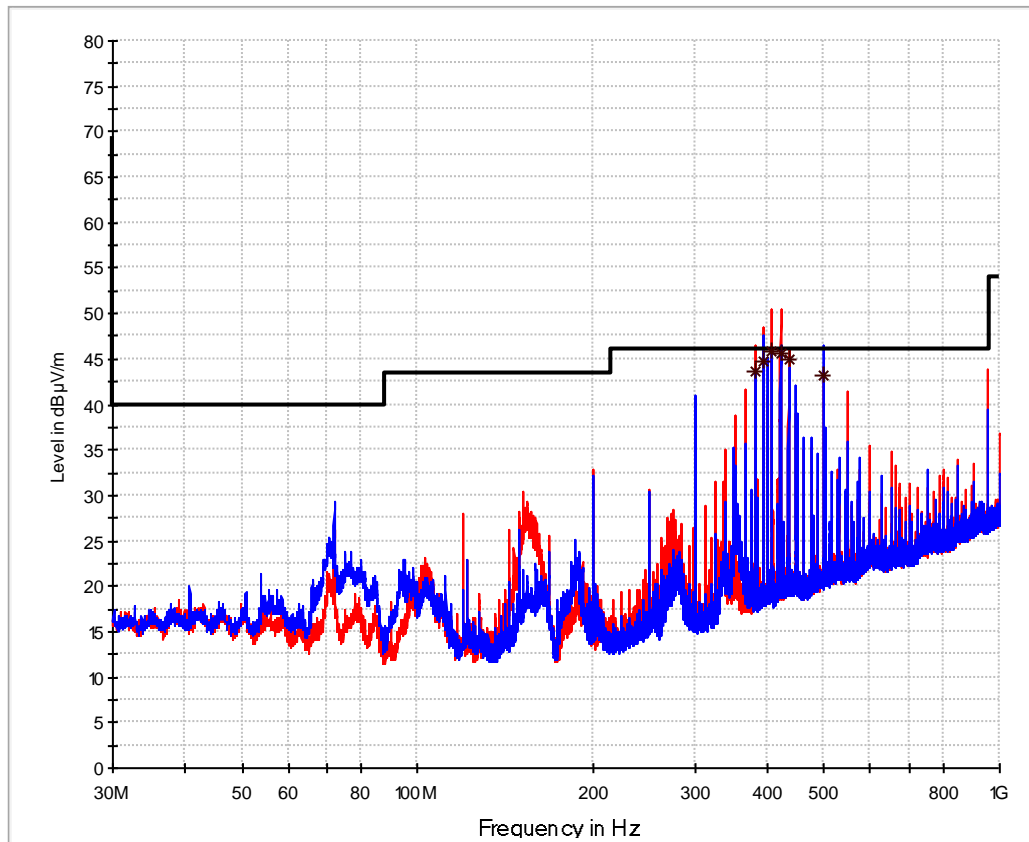

— Preview Result 1H-PK+ — Preview Result 1V-PK+ — FCC 15.209_3m
* Final_Result QP K ◇ Final_Result AVG

Final Results 1:

Frequency MHz	QuasiPeak dBµV/m	Limit dBµV/m	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol	Azimuth deg	Corr. dB
379,680000	43,62	46,00	2,38	1000,0	120,000	100,0	H	-132,0	17,5
393,240000	44,74	46,00	1,26	1000,0	120,000	100,0	H	-92,0	17,8
406,800000	45,84	46,00	0,16	1000,0	120,000	186,0	H	-108,0	18,3
420,360000	45,53	46,00	0,47	1000,0	120,000	175,0	H	-106,0	18,8
433,920000	44,86	46,00	1,14	1000,0	120,000	189,0	H	-109,0	18,9
500,010000	43,13	46,00	2,87	1000,0	120,000	100,0	V	97,0	20,0

30 MHz to 1 GHz



FCC 47 CFR Part 15, Limit Clause 15.225 (a)(b)(c)(d)

(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 m.

(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 m.

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 m.

(d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

FCC 47 CFR Part 15, Limit Clause 15.209

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 to 0.490	2400/F (kHz)	300
0.490 to 1.705	24000/F (kHz)	30
1705 to 30	30	30
30 to 88	100**	3
88 to 216	150**	3
216 to 960	200**	3
Above 960	500	5

Table 5 - FCC Radiated Emission Limit



ISED Canada RSS-210, Limit Clause B.6

The field strength of any emission shall not exceed the following limits:

- (a) 15.848 mW/m (84 dBμV/m) at 30 m, within the band 13.553 – 13.567 MHz.
- (b) 334 μV/m (50.5 dBμV/m) at 30 m, withing the bands 13.410 – 13.553 MHz and 13.567 – 13.710 MHz.
- (c) 106 μV/m (40.5 dBμV/m) at 30 m, within the bands 13.110 – 13.410 MHz and 13.710 – 14.010 MHz.
- (d) RSS-GEN general field strength limits for frequencies outside the band 13.110 – 14.010 MHz.

ISED Canada RSS-GEN, Limit Clause

Frequency	Electric Field Strength (μV/m)	Magnetic Field Strength (H-Field) (μA/m)	Measurement Distance (m)
9 - 490 kHz	2,400/F (F in kHz)	2,400/377F (F in kHz)	300
490 - 1,705 kHz	24,000/F (F in kHz)	24,000/377F (F in kHz)	30
1,705 kHz - 30 MHz	30	N/A	30

Table 6 - ISED Canada Radiated Emission Limit - Less than 30 MHz

Frequency (MHz)	Field Strength (μV/m at 3 m)
30 - 88	100
88 - 216	150
216 - 960	200
> 960	500

Table 7 - ISED Canada Radiated Emission Limit - 30 MHz to 1 GHz

2.1.7 Test Location and Test Equipment Used

This test was carried out in Semi anechoic room - cabin no. 8.

Instrument	Manufacturer	Type No	T-ID	Calibration Period (months)	Calibration Due
Loop antenna	Rohde & Schwarz	HFH2-Z2	18876	24	2019-07-31
TRILOG Antenna	Schwarzbeck	VULB 9163	19691	24	2020-12-31
EMI test receiver	Rohde & Schwarz	ESW26	28268	12	2019-05-31

Table 8

TU - Traceability Unscheduled
 O/P Mon – Output Monitored using calibrated equipment
 N/A - Not Applicable



2.2 Frequency Tolerance Under Temperature Variations

2.2.1 Specification Reference

FCC 47 CFR Part 15C, ISED Canada RSS-210 and ISED Canada RSS-GEN, Clause 15.225 (e), B.1 to B.9 and 6.11.

2.2.2 Equipment Under Test and Modification State

WRU 200, S/N: --- - Modification State 0

2.2.3 Date of Test

2018-11-22

2.2.4 Test Method

2.2.5 Environmental Conditions

Ambient Temperature 21,0 °C
 Relative Humidity 31,0 %

2.2.6 Test Results

12 V DC power supply - Transmitting continuously

Temperature	Voltage	Measured Frequency (MHz)	Frequency Deviation (%)	Frequency Error (ppm)
-20.0 °C	12V	13.560070	0.000052	0.516
-10.0 °C	12V	13.560106	0.000317	3.171
0.0 °C	12V	13.560119	0.000413	4.130
+10.0 °C	12V	13.560103	0.000295	2.950
+20.0 °C	12V	13.560063	0.000000	0.000
+30.0 °C	12V	13.560025	-0.000280	-2.802
+40.0 °C	12V	13.559984	-0.000583	-5.826
+50.0 °C	12V	13.559969	-0.000695	-6.947

Table 9 - Frequency Tolerance Under Temperature Variation

Temperature	Voltage	Measured Frequency (MHz)	Frequency Deviation (%)	Frequency Error (ppm)
+20.0 °C	9V	13.560016	-0.000346	-3.459
+20.0 °C	12V	13.560063	0.000000	0.000
+20.0 °C	14V	13.560019	-0.000323	-3.230

Table 10 - Frequency Tolerance Under Voltage Variation



FCC 47 CFR Part 15, Limit Clause 15.225 (e)

The frequency tolerance of the carrier signal shall be maintained within ± 0.01 % of the operating frequency.

ISED Canada RSS-210, Limit Clause B.6

Carrier frequency stability shall be maintained to $\pm 0.01\%$ (± 100 ppm)

2.2.7 Test Location and Test Equipment Used

This test was carried out in Non shielded room.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Spectrum Analyzer	Rohde & Schwarz	FSV40	20219	12	2019-01-31
Climatic test chamber	ESPEC	PL-2J	18843	24	2019-03-31

Table 11

TU - Traceability Unscheduled

O/P Mon – Output Monitored using calibrated equipment

N/A - Not Applicable



2.3 20 dB Bandwidth

2.3.1 Specification Reference

FCC 47 CFR Part 15C, ISED Canada RSS-210 and ISED Canada RSS-GEN, Clause 15.215 (c), N/A and 6.6

2.3.2 Equipment Under Test and Modification State

WRU 200, S/N: --- - Modification State 0

2.3.3 Date of Test

2018-11-22

2.3.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 6.9.1.

2.3.5 Environmental Conditions

Ambient Temperature 21,0 °C
Relative Humidity 30,0 %

2.3.6 Test Results

12 V DC power supply - Transmitting continuously

Frequency (MHz)	20 dB Bandwidth (Hz)	99% Occupied Bandwidth (Hz)	F _{LOWER} (MHz)	F _{UPPER} (MHz)
13.56	300303	514046	13.477002	13.777305

Table 12

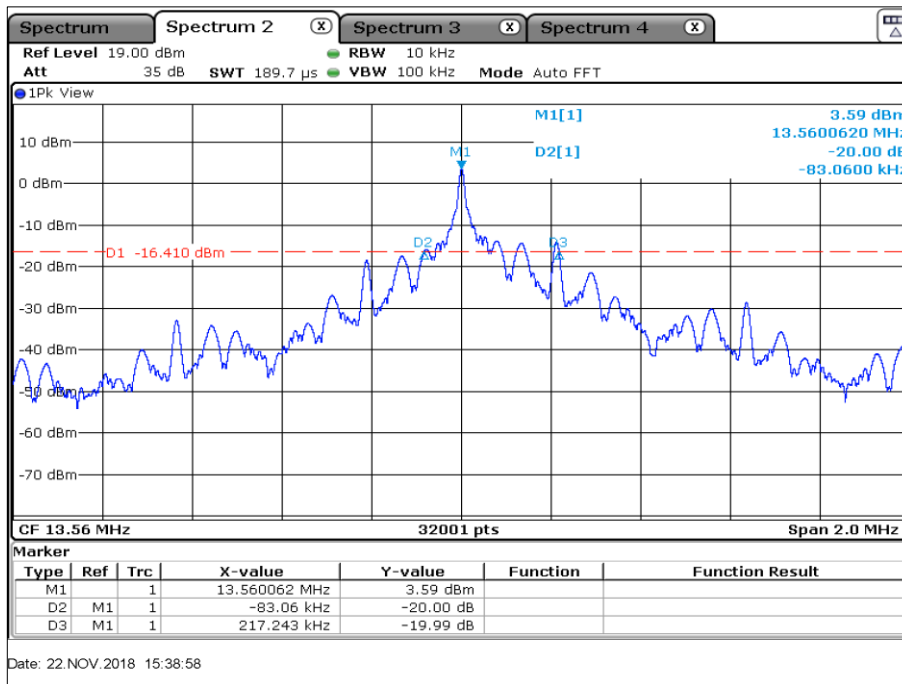


Figure 1 - 20 dB Bandwidth

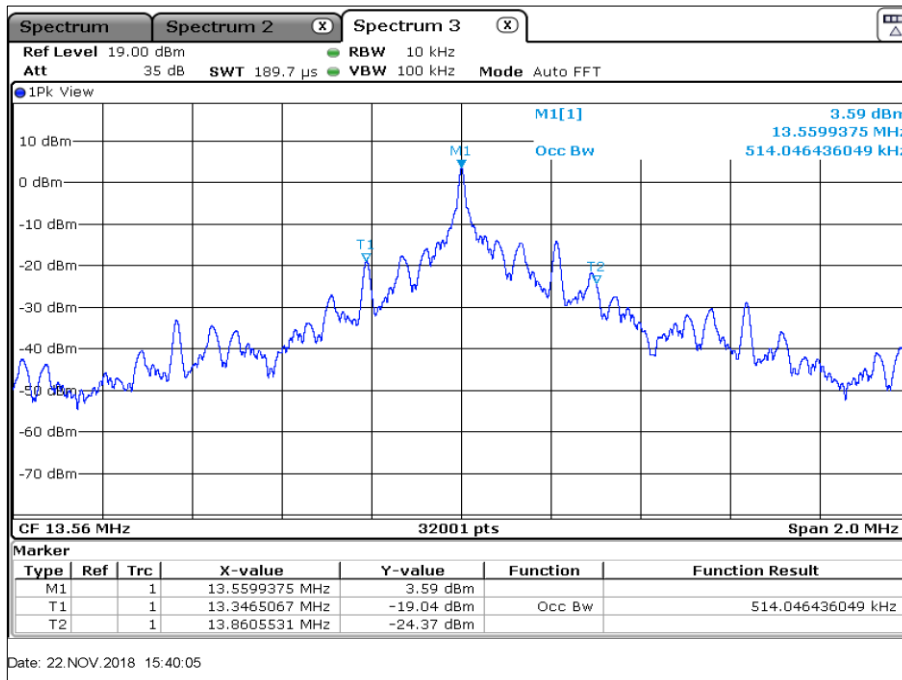


Figure 2 - 99% Occupied Bandwidth



FCC 47 CFR Part 15, Limit Clause 15.215 (c)

The 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

ISED Canada RSS 210 and ISED Canada RSS GEN, Limit Clause

None specified.

2.3.7 Test Location and Test Equipment Used

This test was carried out in Non shielded room.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Spectrum Analyzer	Rohde & Schwarz	FSV40	20219	12	2019-01-31
Climatic test chamber	ESPEC	PL-2J	18843	24	2019-03-31

Table 13

TU - Traceability Unscheduled
O/P Mon – Output Monitored using calibrated equipment
N/A - Not Applicable



2.4 Restricted Band Edges

2.4.1 Specification Reference

FCC 47 CFR Part 15C, ISED Canada RSS-210 and ISED Canada RSS-GEN, Clause 15.205, 4.1 and 8.10

2.4.2 Equipment Under Test and Modification State

WRU 200, S/N: --- - Modification State 0

2.4.3 Date of Test

2018-11-20

2.4.4 Test Method

This test was performed in accordance with ANSI C63.10, clause 11.13.1.

Plots for average measurements were taken in accordance with ANSI C63.10 clause 4.1.4.2.3.

Final average measurements were taken in accordance with ANSI C63.10 clause 4.1.4.2.2.

2.4.5 Environmental Conditions

Ambient Temperature	22,0 °C
Relative Humidity	30,0 %

2.4.6 Test Results

No restricted band in the range



FCC 47 CFR Part 15, Limit Clause 15.205

	Peak (dBµV/m)	Average (dBµV/m)
Restricted Bands of Operation	74	54

Table 14

ISED Canada RSS-GEN, Limit Clause 8.9

Frequency (MHz)	Field Strength (µV/m at 3 metres)
30-88	100
88-216	150
216-960	200
Above 960*	500

Table 15

*Unless otherwise specified, for all frequencies greater than 1 GHz, the radiated emission limits for licence-exempt radio apparatus stated in applicable RSSs (including RSS-Gen) are based on measurements using a linear average detector function having a minimum resolution bandwidth of 1 MHz. If an average limit is specified for the EUT, then the peak emission shall also be measured with instrumentation properly adjusted for such factors as pulse desensitization to ensure the peak emission is less than 20 dB above the average limit.

2.4.7 Test Location and Test Equipment Used

This test was carried out in Semi anechoic room - cabin no. 8.

Instrument	Manufacturer	Type No	T-ID	Calibration Period (months)	Calibration Due
Loop antenna	Rohde & Schwarz	HFH2-Z2	18876	24	2019-07-31
TRILOG Antenna	Schwarzbeck	VULB 9163	19691	24	2020-12-31
EMI test receiver	Rohde & Schwarz	ESW26	28268	12	2019-05-31

Table 16

TU - Traceability Unscheduled
 O/P Mon – Output Monitored using calibrated equipment
 N/A - Not Applicable



2.5 AC Power Line Conducted Emissions

2.5.1 Specification Reference

FCC 47 CFR Part 15C, ISED Canada RSS-210 and ISED Canada RSS-GEN, Clause 15.207, N/A and 8.8

2.5.2 Equipment Under Test and Modification State

WRU 200, S/N: --- - Modification State 0

2.5.3 Date of Test

2018-11-21


2.5.4 Test Method

2.5.5 Environmental Conditions

Ambient Temperature	21,0 °C
Relative Humidity	30,0 %

2.5.6 Test Results

12 V DC power supply - Transmitting continuously

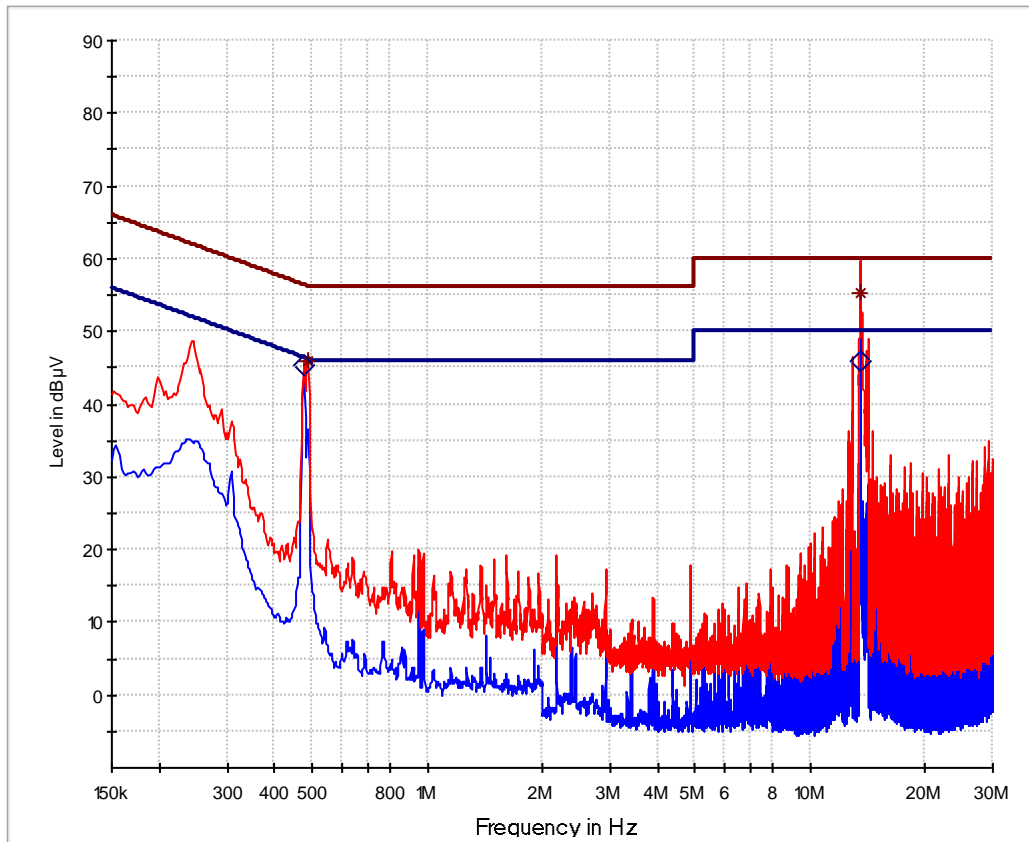


— Preview Result 2-AVG — Preview Result 1-PK+ — FCC 15.107 Class B QP
— FCC 15.107 Class B AV * Final Result QP K ◊ Final Result AVG

Final Results 1:

Frequency MHz	QuasiPeak dBµV	Average dBµV	Limit dBµV	Margin dB	Meas. Time ms	Bandwidth kHz	PE	Corr. dB
0,476250	0,00	45,37	46,40	1,03	1000,0	9,000	GND	0,0
0,487500	45,99	0,00	56,21	10,22	1000,0	9,000	GND	0,0
13,560000	0,00	45,81	50,00	4,19	1000,0	9,000	GND	0,2
13,560000	55,32	0,00	60,00	4,68	1000,0	9,000	GND	0,2

Line Plus - 150 kHz to 30 MHz

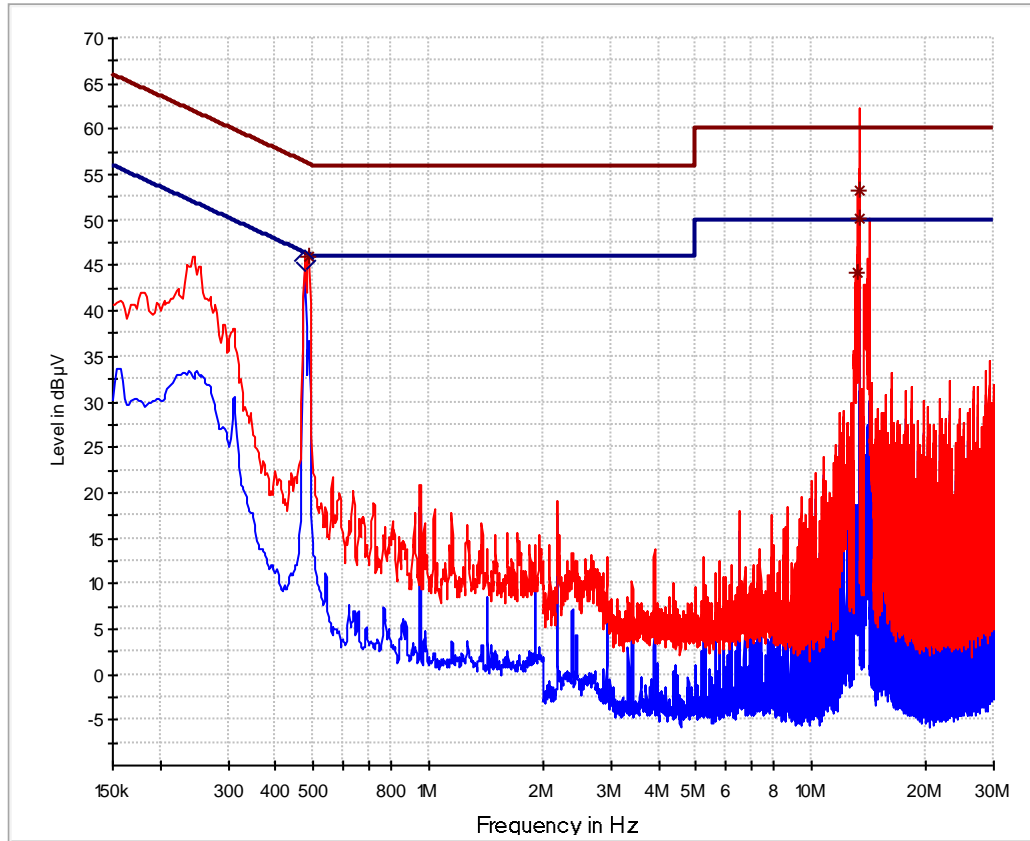

— Preview Result 2-AVG
— FCC 15.107 Class B AV
— Preview Result 1-PK+
* Final Result QP K
— FCC 15.107 Class B QP
◇ Final Result AVG

Final Results 1:

Frequency MHz	QuasiPeak dBµV	Average dBµV	Limit dBµV	Margin dB	Meas. Time ms	Bandwidth kHz	PE	Corr. dB
0,476250	0,00	45,51	46,40	0,90	1000,0	9,000	GND	0,0
0,487500	45,87	0,00	56,21	10,34	1000,0	9,000	GND	0,0
13,269750	44,24	0,00	60,00	15,76	1000,0	9,000	GND	0,2
13,348500	53,20	0,00	60,00	6,80	1000,0	9,000	GND	0,2
13,402500	50,27	0,00	60,00	9,73	1000,0	9,000	GND	0,2

Line Minus - 150 kHz to 30 MHz



FCC 47 CFR Part 15, Limit Clause 15.207 and ISED Canada RSS-GEN, Limit Clause 8.8

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50

Table 17

*Decreases with the logarithm of the frequency.

2.5.7 Test Location and Test Equipment Used

This test was carried out in Shielded room - cabin no. 9.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
EMI test receiver	Rohde & Schwarz	ESU8	19904	12	2018-12-31
V-network	Rohde & Schwarz	ESH 3-Z5	18919	36	2019-10-31

Table 18

TU - Traceability Unscheduled
 O/P Mon – Output Monitored using calibrated equipment
 N/A - Not Applicable



2.6 Exposure of Humans to RF Fields and SAR exclusion threshold

2.6.1 Specification Reference

ISED Canada RSS-102 Issue 5, section 2.5
KDB 447498 D01 V06, section 4.3.1 c)

2.6.2 Equipment Under Test and Modification State

WRU 200, S/N: --- - Modification State 0

2.6.3 Date of Test

2018-11-20

2.6.4 Test Results

12 V DC power supply - Transmitting continuously



Exposure of Humans to RF Fields	Applicable	Declared by applicant	Measured	Exemption
The antenna is				
<input type="checkbox"/> detachable				
The conducted output power (CP in watts) is measured at the antenna connector: $CP = \dots\dots\dots \mathbf{W}$ The effective isotropic radiated power (EIRP in watts) is calculated using <input type="checkbox"/> the numerical antenna gain: $G = \dots\dots\dots$ $EIRP = G \cdot CP \Rightarrow EIRP = \dots\dots\dots \mathbf{W}$ <input type="checkbox"/> the field strength ¹ in V/m: $FS = \dots\dots\dots \mathbf{V/m}$ $EIRP = \frac{(FS \cdot D)^2}{30} \Rightarrow EIRP = \dots\dots\dots \mathbf{W}$ with: Distance between the antennas in m: $D = \dots\dots\dots \mathbf{m}$			<input type="checkbox"/>	
<input checked="" type="checkbox"/> not detachable				
A field strength measurement is used to determine the effective isotropic radiated power (EIRP in watts) given by: $EIRP = \frac{(FS \cdot D)^2}{30} \Rightarrow EIRP = \mathbf{65.33 \text{ nW}}$ (FS taken from chapter 2.1 of this test report) with: Field strength in V/m: $FS = \mathbf{0.00014}$ Distance between the two antennas in m: $D = \mathbf{10}$			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Selection of output power				
The output power TP is the higher of the conducted or effective isotropic radiated power (e.i.r.p.): $TP = \mathbf{65.33 \text{ nW}}$				

¹ The conversion formula is valid only for properly matched antennas. In other cases the transmitter output power may have to be measured by a terminated measurement when applying the exemption clauses. If an open area test site is used for field strength measurement, the effect due to the metal ground reflecting plane should be subtracted from the maximum field strength value in order to reference it to free space, before calculating TP.



Exposure of Humans to RF Fields (continued)	Applicable	Declared by applicant	Measured	Exemption
Separation distance between the user and the transmitting device is				
<input checked="" type="checkbox"/> less than or equal to 20 cm	<input type="checkbox"/> greater than 20 cm	<input checked="" type="checkbox"/>		
Transmitting device is				
<input type="checkbox"/> in the vicinity of the human head	<input type="checkbox"/> body-worn	<input type="checkbox"/>		



SAR evaluation

SAR evaluation is required if the separation distance between the user and/or bystander and the antenna and/or radiating element of the device is less than or equal to 20 cm, except when the device operates at or below the applicable output power level (adjusted for tune-up tolerance) for the specified separation distance defined in the table.

For controlled use devices where the 8 W/kg for 1 gram of tissue applies, the exemption limits for routine evaluation in the table are multiplied by a factor of 5. For limb-worn devices where the 10 gram value applies, the exemption limits for routine evaluation in the table are multiplied by a factor of 2.5. If the operating frequency of the device is between two frequencies located in the table, linear interpolation shall be applied for the applicable separation distance. For test separation distance less than 5 mm, the exemption limits for a separation distance of 5 mm can be applied to determine if a routine evaluation is required.

For medical implants devices, the exemption limit for routine evaluation is set at 1 mW. The output power of a medical implants device is defined as the higher of the conducted or e.i.r.p to determine whether the device is exempt from the SAR evaluation.

Frequency (MHz)	Exemption limits (mW) ² at separation distance of									
	≤5 mm	10 mm	15 mm	20 mm	25 mm	30 mm	35 mm	40 mm	45 mm	≥50 mm
≤300 ³	71	101	132	162	193	223	254	284	315	345
450	52	70	88	106	123	141	159	177	195	213
835	17	30	42	55	67	80	92	105	117	130
1900	7	10	18	34	60	99	153	225	316	431
2450	4	7	15	30	52	83	123	173	235	309
3500	2	6	16	32	55	86	124	170	225	290
5800	1	6	15	27	41	56	71	85	97	106

Carrier frequency:	f	=	13.56 MHz				
Distance:	d	=	5 mm				
Transmitter output power:	TP	=	0.000065 mW				
Limit:	TP_{limit}	=	71 mW				<input checked="" type="checkbox"/>
<input type="checkbox"/> SAR evaluation is documented in test report no. ...							

² The exemption limit in the table are based on measurements and simulations on half-wave dipole antennas at separaton distances of 5 mm to 25 mm from a flat phantom, providing a SAR value of approximately 0.4 W/kg for 1 g of tissue. For low frequencies (300 MHz to 835 MHz), the exemption limits are derived from a linear fit. For high frequencies (1900 MHz and above), the exemption limits are derived from a third order polynomial fit.

³ Transmitters operating between 3 kHz and 10 MHz, meeting the exemption from routine SAR evaluation, shall demonstrate compliance to the instantaneous limits in ISED CANADA RSS-102, issue 5, section 4.



SAR Exclusion threshold

Maximum Radiated Fields Strength: 43.0 dBµV/m
 (see chapter 2.1.6 of this test report) (at 10 m distance and 13.56 MHz)
 Calculated Equivalent Radiated Power: 0.065 mW (e.i.r.p.) < 0.1 mW
 Minimum separation distance: 5 mm (≤ 50 mm)
 1-g numeric threshold: (1 mW / 5 mm) · √(0.01356 GHz) = 0.023
 1-g numeric threshold limit: 0.25

Note 1: For test distances below 5 mm according to 4.3.1 c) the test distance is fixed to 5 mm.

$$EIRP = \frac{(FS \cdot D)^2}{30}$$

2.6.5 Test Location and Test Equipment Used

This test was carried out in a Shielded room - cabin no. 4.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Loop antenna	Rohde & Schwarz	HFH2-Z2	18876	24	2019-07-31
EMI test receiver	Rohde & Schwarz	ESW26	28268	12	2019-05-31

Table 19

3 Photographs

3.1 Equipment Under Test (EUT)

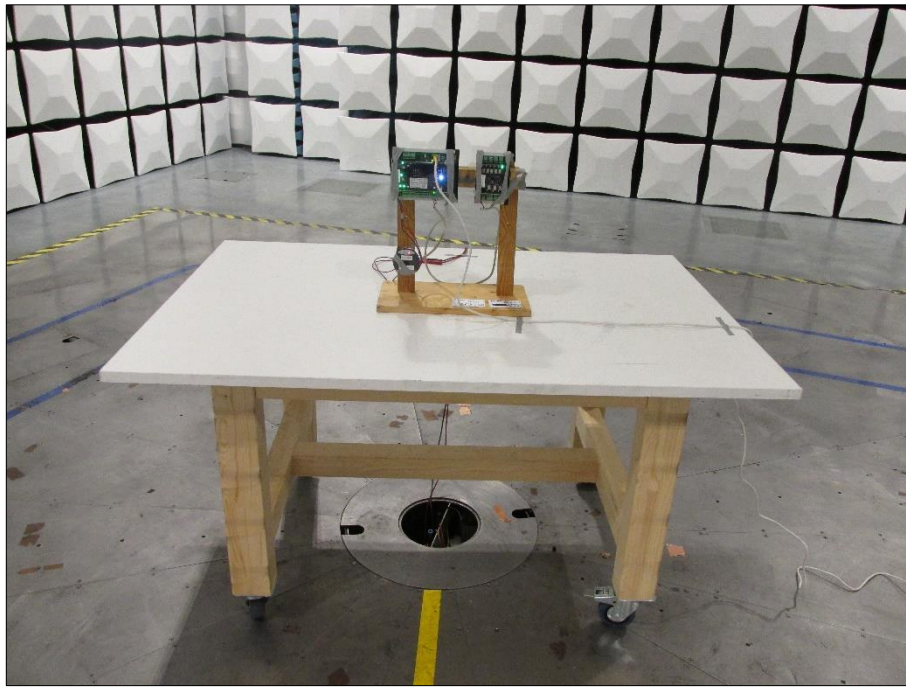


Figure 3

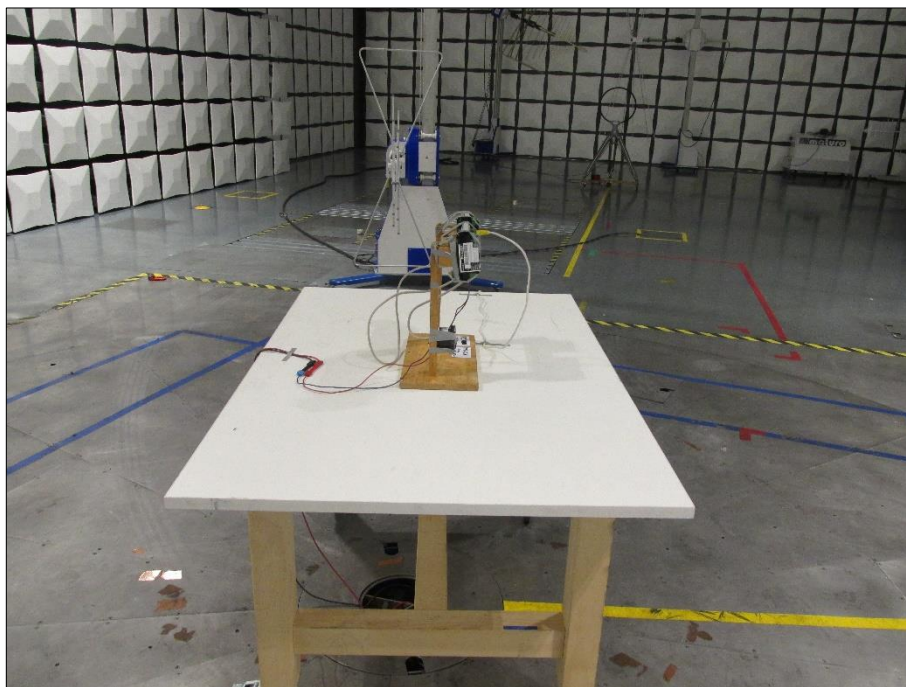


Figure 4

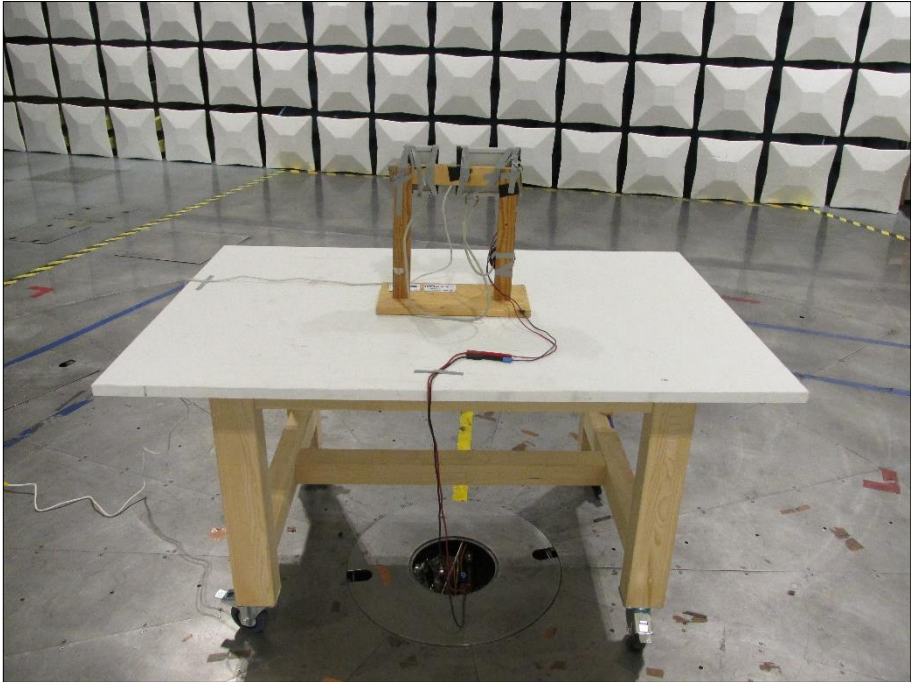


Figure 5

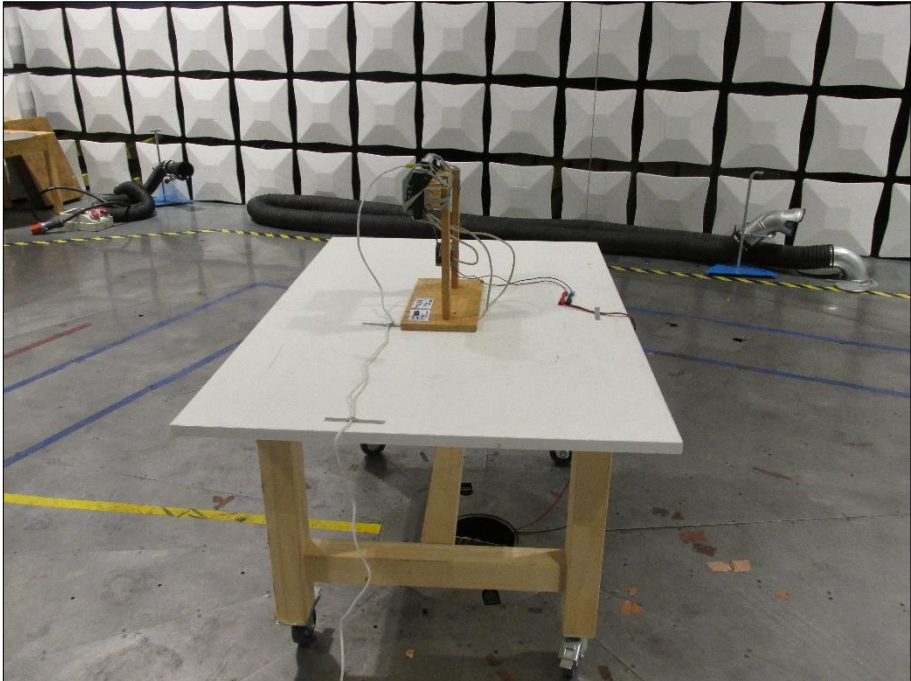


Figure 6

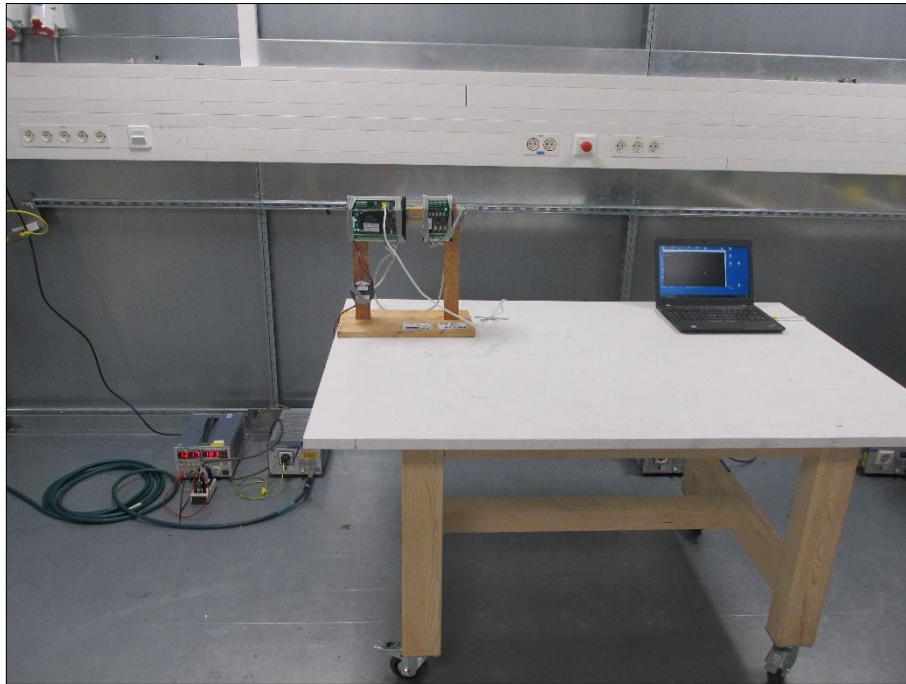


Figure 7

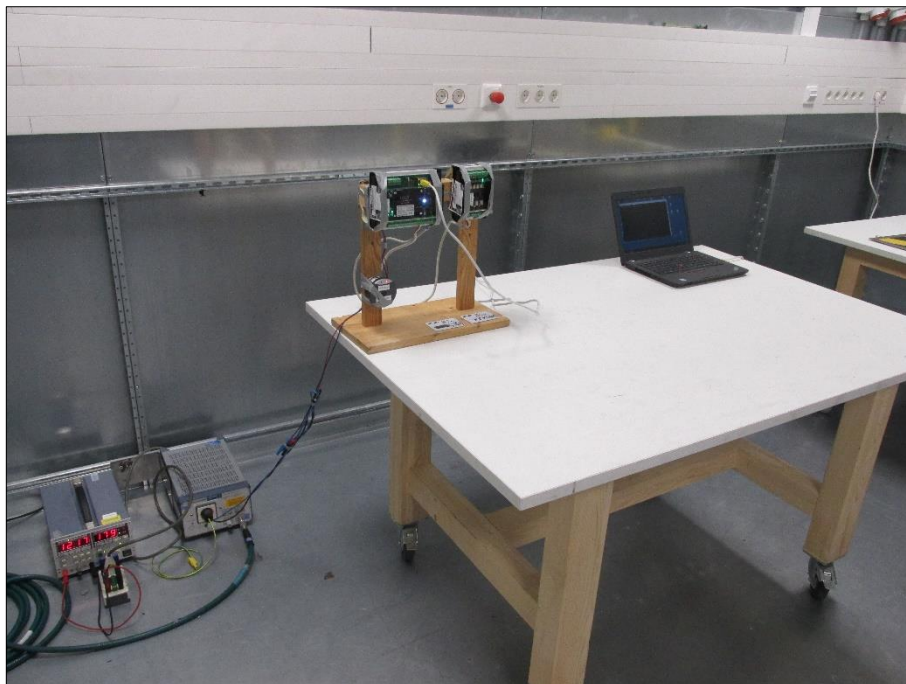


Figure 8

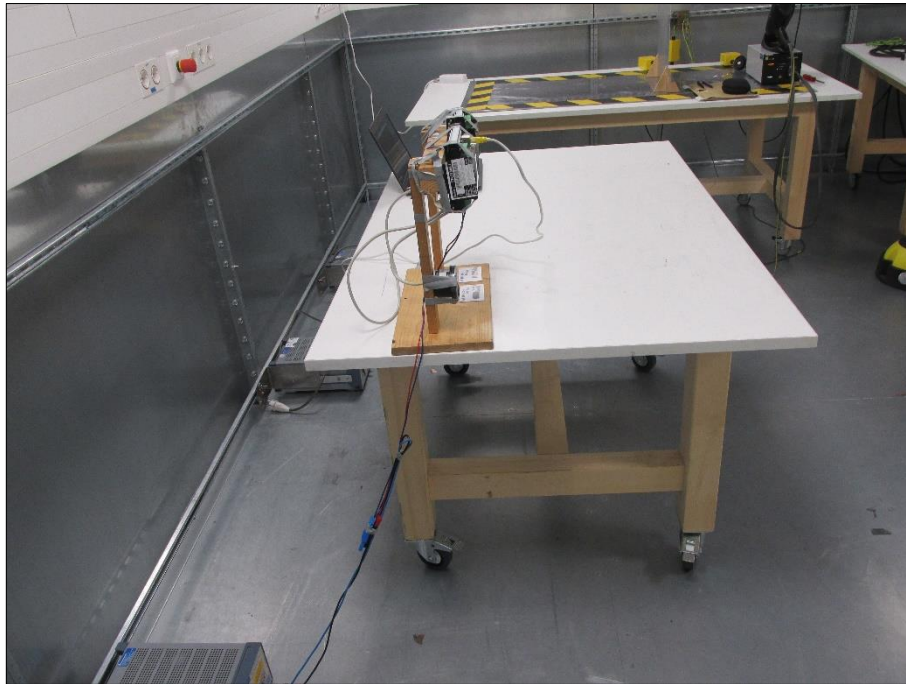


Figure 9



Figure 10

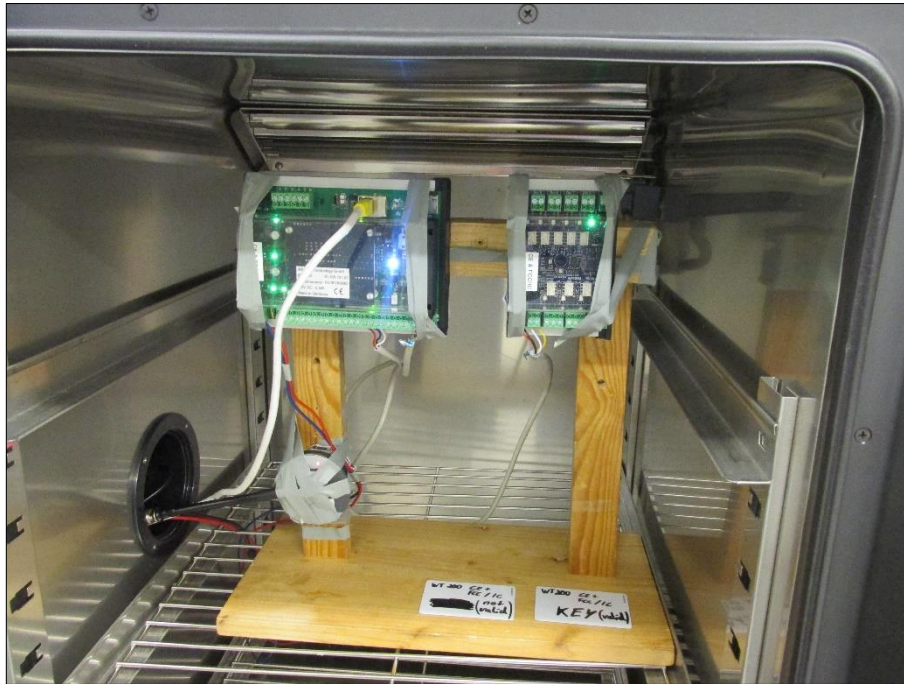


Figure 11



4 Test Equipment Information

4.1 General Test Equipment Used

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Spectrum Analyzer	Rohde & Schwarz	FSV40	20219	12	2019-01-31
Climatic test chamber	ESPEC	PL-2J	18843	24	2019-03-31
Loop antenna	Rohde & Schwarz	HFH2-Z2	18876	24	2019-07-31
TRILOG Antenna	Schwarzbeck	VULB 9163	19691	24	2020-12-31
EMI test receiver	Rohde & Schwarz	ESW26	28268	12	2019-05-31
EMI test receiver	Rohde & Schwarz	ESU8	19904	12	2018-12-31
V-network	Rohde & Schwarz	ESH 3-Z5	18919	36	2019-10-31

Table 20

TU - Traceability Unscheduled

O/P Mon – Output Monitored using calibrated equipment

N/A - Not Applicable



5 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Radio Testing			
Test Name	kp	Expanded Uncertainty	Note
Occupied Bandwidth	2.0	±1.14 %	2
RF-Frequency error	1.96	±1 · 10 ⁻⁷	7
RF-Power, conducted carrier	2	±0.079 dB	2
RF-Power uncertainty for given BER	1.96	+0.94 dB / -1.05	7
RF power, conducted, spurious emissions	1.96	+1.4 dB / -1.6 dB	7
RF power, radiated			
25 MHz – 4 GHz	1.96	+3.6 dB / -5.2 dB	8
1 GHz – 18 GHz	1.96	+3.8 dB / -5.6 dB	8
18 GHz – 26.5 GHz	1.96	+3.4 dB / -4.5 dB	8
40 GHz – 170 GHz	1.96	+4.2 dB / -7.1 dB	8
Spectral Power Density, conducted	2.0	±0.53 dB	2
Maximum frequency deviation			
300 Hz – 6 kHz	2	±2,89 %	2
6 kHz – 25 kHz	2	±0.2 dB	2
Maximum frequency deviation for FM	2	±2,89 %	2
Adjacent channel power 25 MHz – 1 GHz	2	±2.31 %	2
Temperature	2	±0.39 K	4
(Relative) Humidity	2	±2.28 %	2
DC- and low frequency AC voltage			
DC voltage	2	±0.01 %	2
AC voltage up to 1 kHz	2	±1.2 %	2
Time	2	±0.6 %	2

Table 21



Radio Interference Emission Testing			
Test Name	kp	Expanded Uncertainty	Note
Conducted Voltage Emission			
9 kHz to 150 kHz (50Ω/50μH AMN)	2	± 3.8 dB	1
150 kHz to 30 MHz (50Ω/50μH AMN)	2	± 3.4 dB	1
100 kHz to 200 MHz (50Ω/5μH AMN)	2	± 3.6 dB	1
Discontinuous Conducted Emission			
9 kHz to 150 kHz (50Ω/50μH AMN)	2	± 3.8 dB	1
150 kHz to 30 MHz (50Ω/50μH AMN)	2	± 3.4 dB	1
Conducted Current Emission			
9 kHz to 200 MHz	2	± 3.5 dB	1
Magnetic Fieldstrength			
9 kHz to 30 MHz (with loop antenna)	2	± 3.9 dB	1
9 kHz to 30 MHz (large-loop antenna 2 m)	2	± 3.5 dB	1
Radiated Emission			
Test distance 1 m (ALSE)			
9 kHz to 150 kHz	2	± 4.6 dB	1
150 kHz to 30 MHz	2	± 4.1 dB	1
30 MHz to 200 MHz	2	± 5.2 dB	1
200 MHz to 2 GHz	2	± 4.4 dB	1
2 GHz to 3 GHz	2	± 4.6 dB	1
Test distance 3 m			
30 MHz to 300 MHz	2	± 4.9 dB	1
300 MHz to 1 GHz	2	± 5.0 dB	1
1 GHz to 6 GHz	2	± 4.6 dB	1
Test distance 10 m			
30 MHz to 300 MHz	2	± 4.9 dB	1
300 MHz to 1 GHz	2	± 4.9 dB	1
Radio Interference Power			
30 MHz to 300 MHz	2	± 3.5 dB	1
Harmonic Current Emissions			
			4
Voltage Changes, Voltage Fluctuations and Flicker			
			4

Table 22



Immunity Testing			
Test Name	kp	Expanded Uncertainty	Note
Electrostatic Discharges			4
Radiated RF-Field			
Pre-calibrated field level	2	+32.2 / -24.3 %	5
Dynamic feedback field level	2.05	+21.2 / -17.5 %	3
Electrical Fast Transients (EFT) / Bursts			4
Surges			4
Conducted Disturbances, induced by RF-Fields			
via CDN	2	+15.1 / -13.1 %	6
via EM clamp	2	+42.6 / -29.9 %	6
via current clamp	2	+43.9 / -30.5 %	6
Power Frequency Magnetic Field	2	+20.7 / -17.1 %	2
Pulse Magnetic Field			4
Voltage Dips, Short Interruptions and Voltage Variations			4
Oscillatory Waves			4
Conducted Low Frequency Disturbances			
Voltage setting	2	± 0.9 %	2
Frequency setting	2	± 0.1 %	2
Electrical Transient Transmission in Road Vehicles			4

Table 23



Note 1:

The expanded uncertainty reported according to CISPR 16-4-2:2003-11 is based on a standard uncertainty multiplied by a coverage factor of $k_p = 2$, providing a level of confidence of $p = 95.45\%$

Note 2:

The expanded uncertainty reported according to UKAS Lab 34 (Edition 1, 2002-08) is based on a standard uncertainty multiplied by a coverage factor of $k_p = 2$, providing a level of confidence of $p = 95.45\%$

Note 3:

The expanded uncertainty reported according to UKAS Lab 34 (Edition 1, 2002-08) is based on a standard uncertainty multiplied by a coverage factor of $k_p = 2.05$, providing a level of confidence of $p = 95.45\%$

Note 4:

It has been demonstrated that the used test equipment meets the specified requirements in the standard with at least a 95% confidence.

Note 5:

The expanded uncertainty reported according to IEC 61000-4-3 is based on a standard uncertainty multiplied by a coverage factor of $k_p = 2$, providing a level of confidence of $p = 95.45\%$

Note 6:

The expanded uncertainty reported according to IEC 61000-4-6 is based on a standard uncertainty multiplied by a coverage factor of $k_p = 2$, providing a level of confidence of $p = 95.45\%$

Note 7:

The expanded uncertainty reported according to ETSI TR 100 028 V1.4.1 (all parts) is based on a standard uncertainty multiplied by a coverage factor of $k_p = 1.96$, providing a level of confidence of $p = 95.45\%$

Note 8:

The expanded uncertainty reported according to ETSI TR 102 273 V1.2.1 (all parts) is based on a standard uncertainty multiplied by a coverage factor of $k_p = 1.96$, providing a level of confidence of $p = 95.45\%$