

"High Frequency Ceramic Solutions"

2.45 GHz Antenna

P/N 2450AT42A100


Detail Specification: 08/29/2008

Page 1 of 3


General Specifications

Part Number	2450AT42A100
Frequency Range	2400 - 2500 Mhz
Peak Gain	0 dBi typ. (XZ-V)
Average Gain	-1 dBi typ. (XZ-V)
Return Loss	9.5 dB min.

Input Power	3 Watts max.
Impedance	50 Ω
Operating Temperature	-40 to +85°C
Reel Quantity	2,000

No.	Function	Terminal Configuration
1	Feeding Point	
2	NC	


Mechanical Dimensions

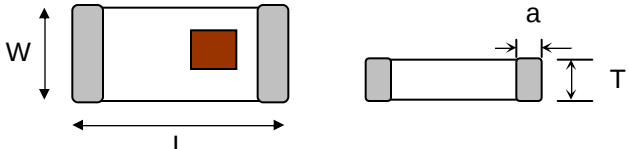	In	mm	
L	0.197 $\pm$ 0.008	5.00 $\pm$ 0.20	
W	0.079 $\pm$ 0.008	2.00 $\pm$ 0.20	
T	0.043 $\pm$ 0.008	1.10 $\pm$ 0.20	
a	0.020 $\pm$ 0.012	0.50 $\pm$ 0.30	

Mounting Considerations

Mount these devices with brown mark facing up. Units: mm

*Line width should be designed to provide 50 Ω impedance matching characteristics.

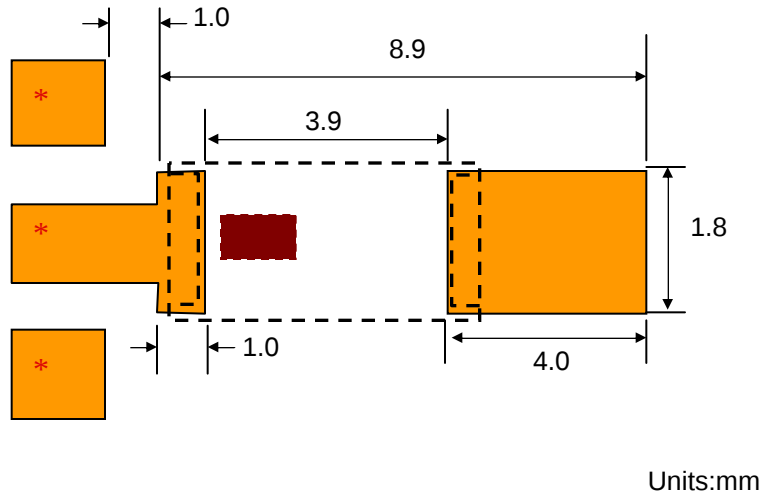

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.

"High Frequency Ceramic Solutions"


2.45 GHz Antenna

P/N 2450AT42A100

Detail Specification: 08/29/2008



Page 2 of 3

Typical Electrical Characteristics (T=25°C)

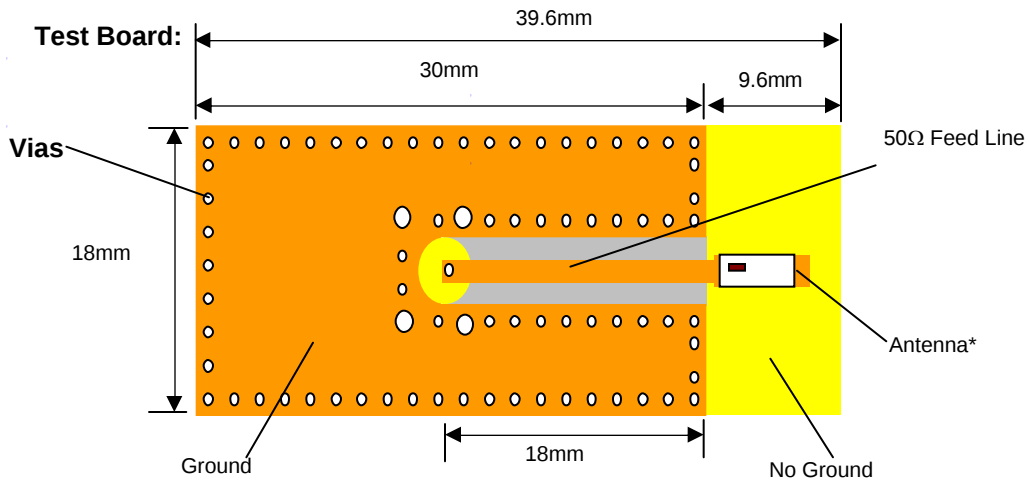

Return Loss

*No Matching Circuit required

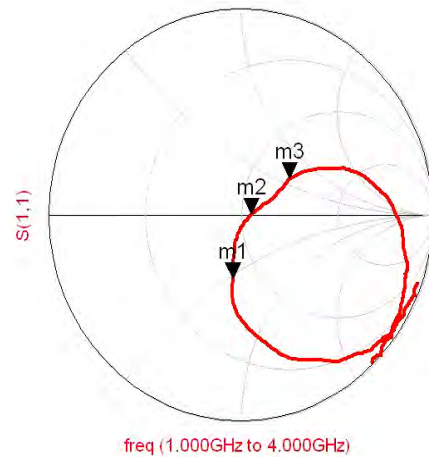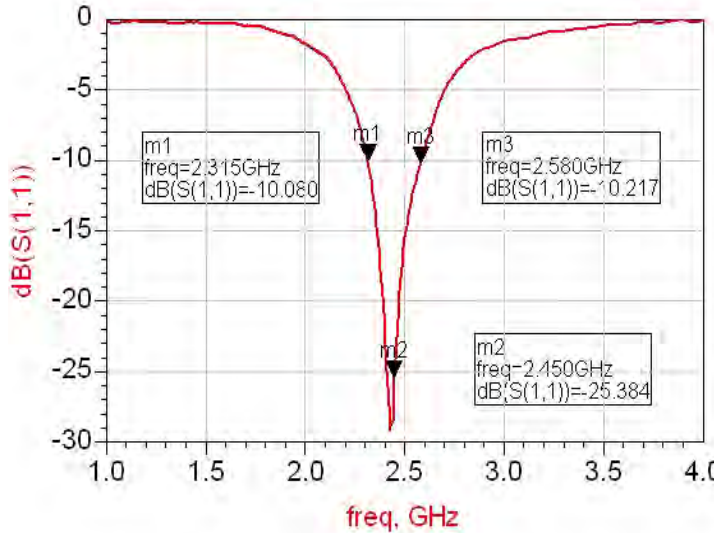

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.

"High Frequency Ceramic Solutions"


2.45 GHz Antenna

Detail Specification: 08/29/2008

P/N 2450AT42A100

Page 2 of 3

Typical Radiation Patterns

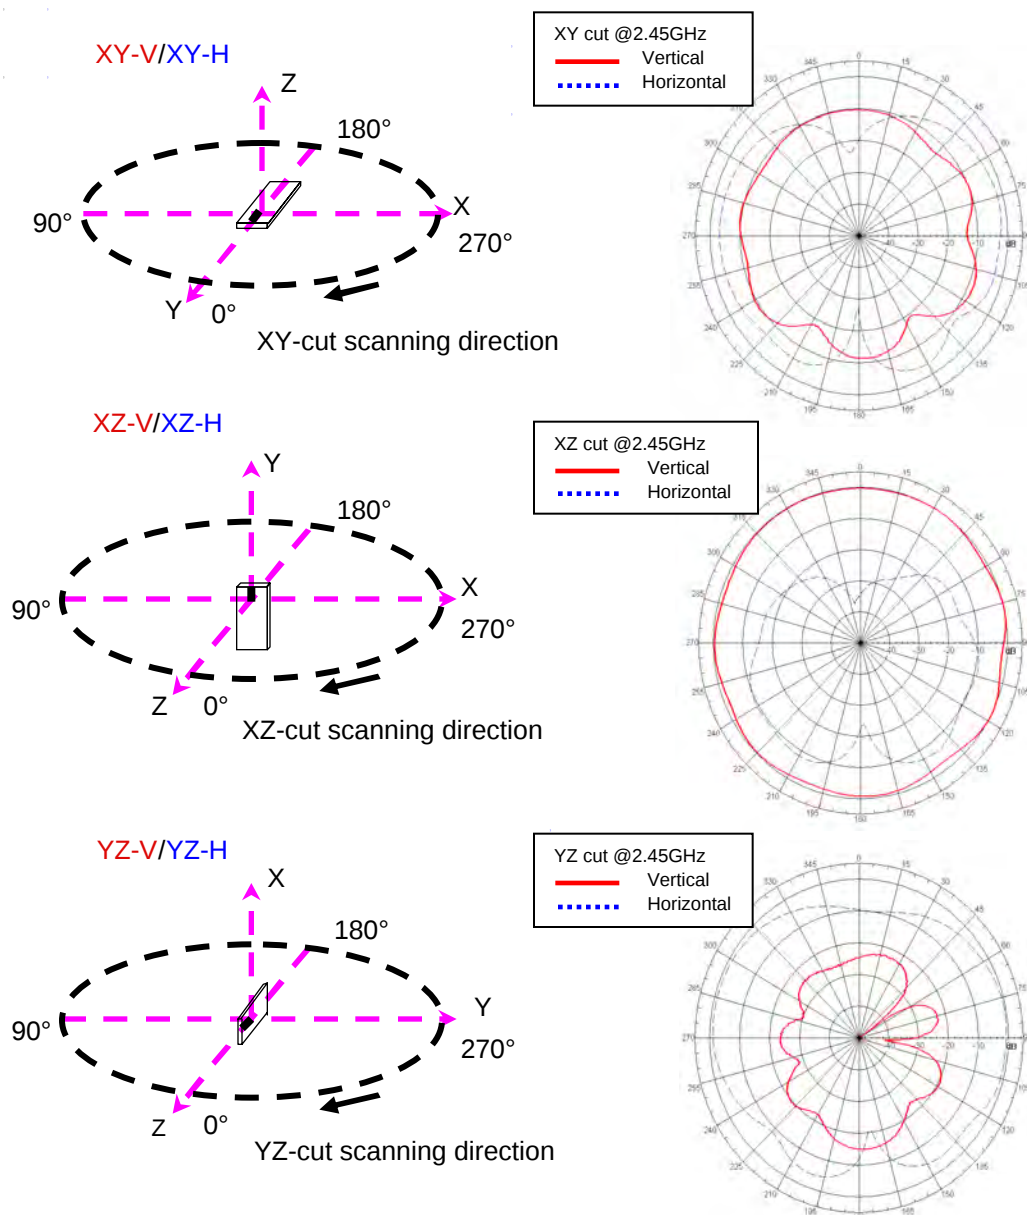

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2008 Johanson Technology, Inc. All Rights Reserved