



**FCC CFR47 PART 15 SUBPART C
CERTIFICATION TEST REPORT**

FOR

802.11b/g ACCESS POINT

MODEL NUMBER: BWRG500

FCC ID: TDK-BWRG500

REPORT NUMBER: 07U11036-1, REVISION B

ISSUE DATE: JUNE 25, 2007

Prepared for

**BOUNTIFUL WIFI LLC
625 EAST 500 SOUTH SUITE 102
BOUNTIFUL, UT 84010, U.S.A.**

Prepared by

**COMPLIANCE CERTIFICATION SERVICES
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	05/18/07	Initial Issue	T. Chan
B	06/25/07	Updated antenna and model information	T. Hong

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. MEASURING INSTRUMENT CALIBRATION	5
4.2. MEASUREMENT UNCERTAINTY	5
5. EQUIPMENT UNDER TEST	6
5.1. DESCRIPTION OF EUT	6
5.2. MAXIMUM OUTPUT POWER	6
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	6
5.4. MODIFICATION REPORT	6
5.5. SOFTWARE AND FIRMWARE	7
5.6. WORST-CASE CONFIGURATION AND MODE	7
5.7. DESCRIPTION OF TEST SETUP	8
6. TEST AND MEASUREMENT EQUIPMENT	10
7. LIMITS AND RESULTS	11
7.1. CHANNEL TESTS FOR THE 2400 TO 2483.5 MHz BAND	11
7.1.1. 6 dB BANDWIDTH	11
7.1.2. 99% BANDWIDTH	18
7.1.3. PEAK OUTPUT POWER	25
7.1.4. MAXIMUM PERMISSIBLE EXPOSURE	33
7.1.5. AVERAGE POWER	36
7.1.6. PEAK POWER SPECTRAL DENSITY	37
7.1.7. CONDUCTED SPURIOUS EMISSIONS	44
7.2. RADIATED EMISSIONS	57
7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS	57
7.2.2. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND	60
7.2.3. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz	78
7.3. POWERLINE CONDUCTED EMISSIONS	82
8. SETUP PHOTOS	86

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: BOUNTIFUL WIFI LLC
625 EAST 500 SOUTH SUITE 102
BOUNTIFUL, UT 84010, U.S.A.

EUT DESCRIPTION: 802.11b/g ACCESS POINT

MODEL TESTED: BWRG500

SERIAL NUMBER: 01948

DATE TESTED: MAY 09-11, 2007

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:

Tested By:



THU CHAN
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES

WILLIAM ZHUANG
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is an 802.11b/g Access Point

The radio module is manufactured by Bountiful WiFi LL.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

2400 to 2483.5 MHz Authorized Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2462	802.11b	22.31	170.22
2412 - 2462	802.11g	22.54	179.47

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a dipole antenna with a maximum gain of 3.0dBi.

5.4. MODIFICATION REPORT

Added ferrite with couple turns to the AC/DC adapter which is close to the AP's end.

5.5. SOFTWARE AND FIRMWARE

The EUT driver software installed in the host support equipment during testing was Art program.

The test utility software used during testing was ART 5.2 build 298

5.6. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest output power. The highest measured output power was at 2437 MHz.

The worst-case data rate for this channel is determined to be 1Mb/s for b mode and 6Mb/s for g mode based on previous experience with 2.4GHz WLAN product design architectures.

The model BWRG500 is selected for the final test because it has the highest output power & antenna gain.

5.7. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop PC	Toshiba	PSAA8U-0FH02K	X6480519Q	DoC
AC/DC Adapter	Delta Electronics	SADP-75PB A	6032B0007001-0643-	N/A
AC Adapter	Bountiful WiFi	KSAFE0500400W1US	01958	N/A


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	DC	1	AC	Unshielded	2m	Ferrite on EUT End
2	AC	1	AC	Unshielded	2m	NA
3	DC	1	DC	Unshielded	2m	Ferrite on PC END
4	Ethernet	1	RJ45	Unshielded	2m	NA

TEST SETUP

The EUT is connected to a host laptop computer via a RJ45 cable during the tests. Test software exercised the Access Point.

SETUP DIAGRAM FOR TESTS

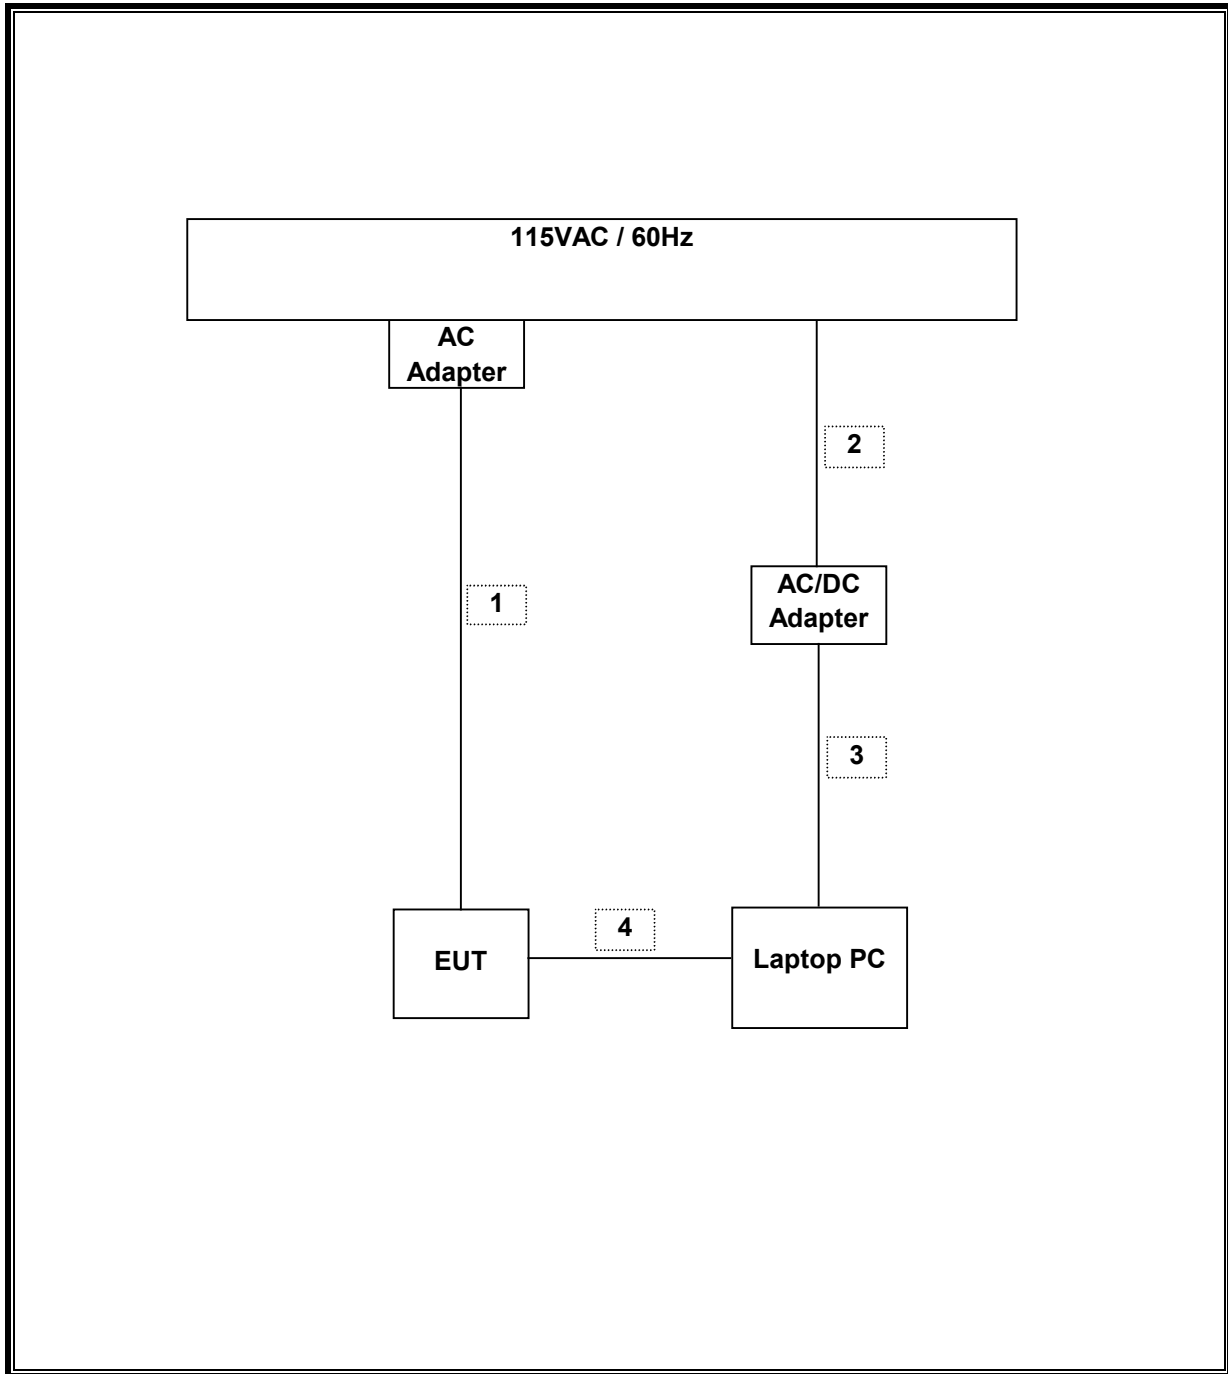

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
SA RF Section, 1.5 GHz	Agilent / HP	85680B	2814A04227	1/7/2008
SA Display Section 2	Agilent / HP	85662A	2816A16696	4/7/2008
Preamplifier, 1300 MHz	Agilent / HP	8447D	1937A02062	5/9/2008
Antenna, Bilog 30 MHz ~ 2 Ghz	Sunol Sciences	JB1	A0022704	8/13/2007
Spectrum Analyzer	Agilent	E4446A	MY45300064	12/18/2007
Antenna, Horn 1 ~ 18 GHz	EMCO	3115	6717	4/15/2008
Preamplifier, 1 ~ 26.5 GHz	Agilent / HP	8449B	3008A00369	8/1/2007
Power Meter	Agilent / HP	438A	3513U04320	9/4/2007
Power Sensor 10MHz - 18GHz	Agilent / HP	8481A	2702A66876	4/22/2008
EMI Test Receiver	R & S	ESHS 20	827129/006	1/27/2008
LISN, 10 kHz - 30 MHz	FCC	LISN50/250-25-2	2023	9/27/2008
LISN, 10 kHz - 30 MHz	Solar	8012-50-R-24-BNC	8379443	9/27/2008
4.0 High Pass Filter	Micro Tronics	HPM13351	3	N/A
Spectrum Analyzer	Agilent	E4446A	MY45300064	12/18/07

7. LIMITS AND RESULTS

7.1. CHANNEL TESTS FOR THE 2400 TO 2483.5 MHz BAND

7.1.1. 6 dB BANDWIDTH

LIMIT

§15.247 (a) (2) For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

No non-compliance noted:


802.11b Mode


Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	11166.667	500	10667
Middle	2437	12083.333	500	11583
High	2462	12083.333	500	11583


802.11g Mode

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	16333.333	500	15833
Middle	2437	16333.333	500	15833
High	2462	16333.333	500	15833


6 DB BANDWIDTH (802.11b MODE)

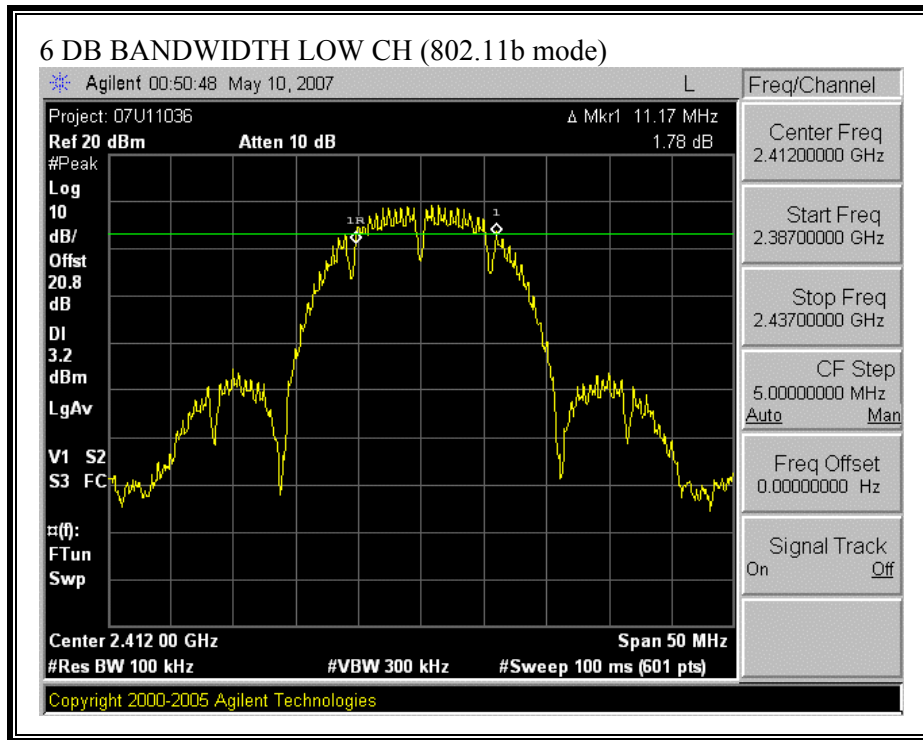


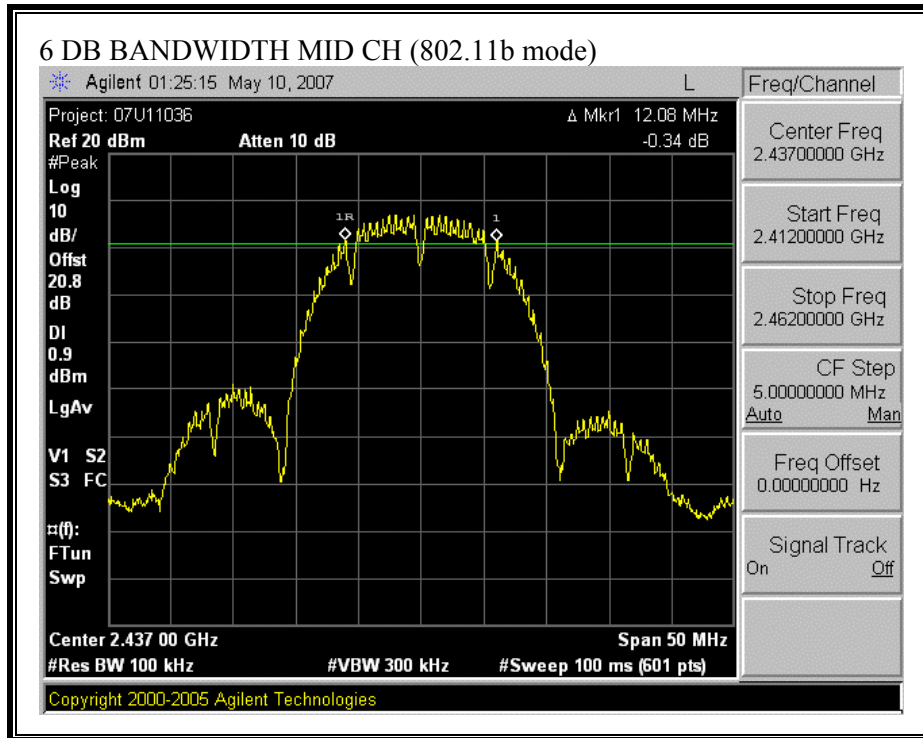


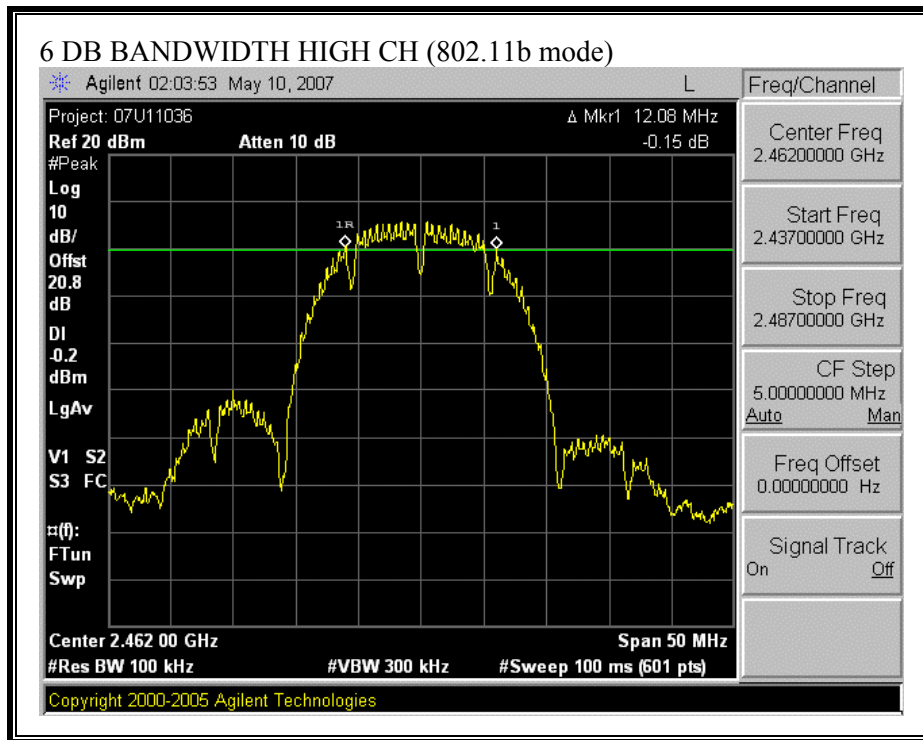

6 DB BANDWIDTH (802.11g MODE)

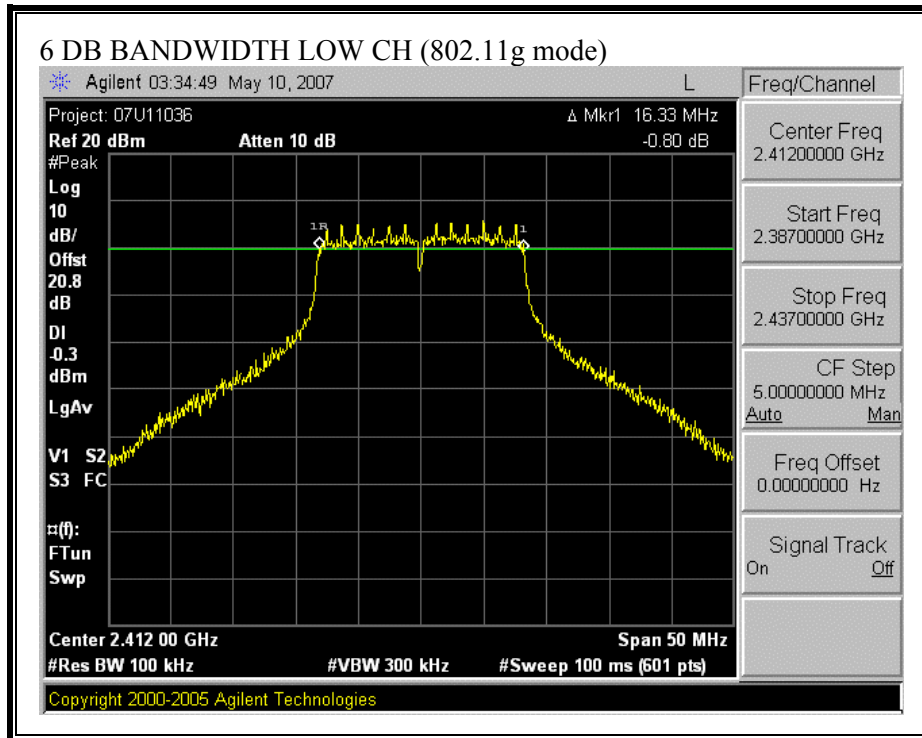

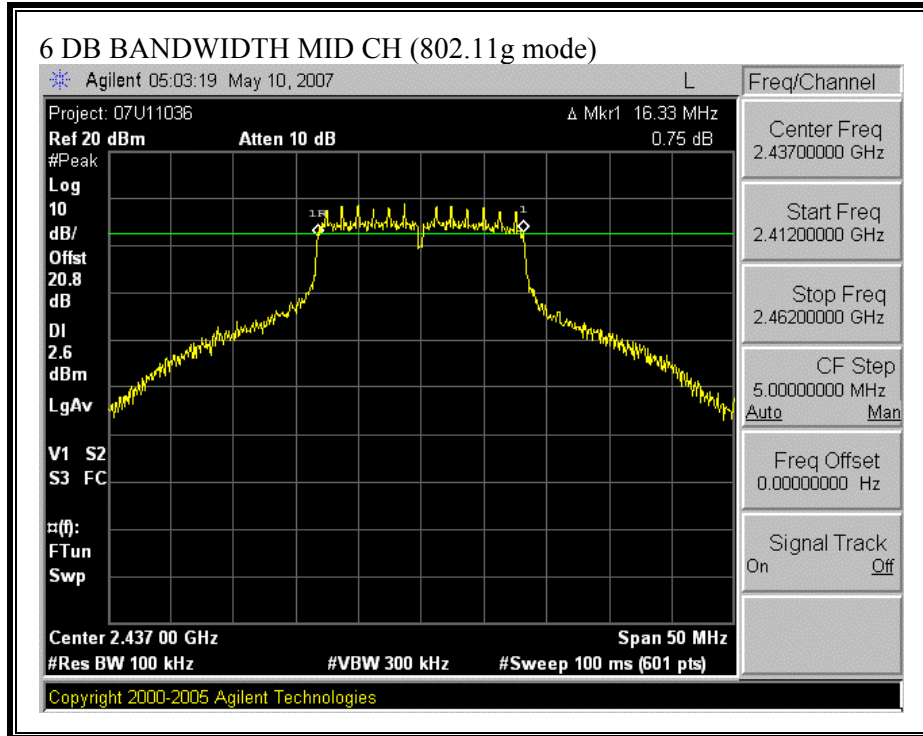

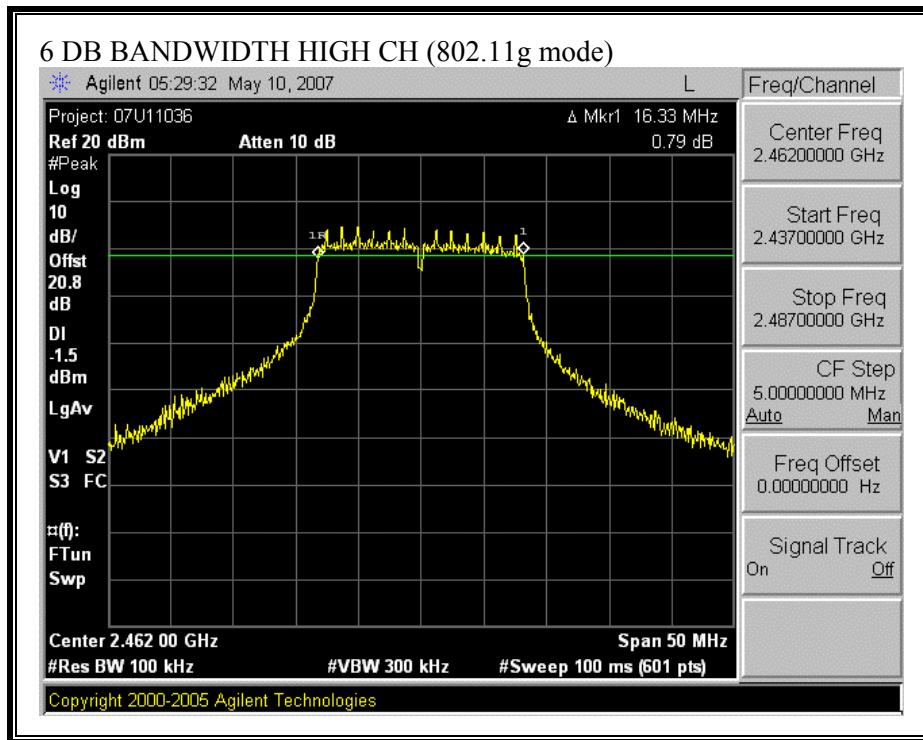

7.1.2. 99% BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

No non-compliance noted:


802.11b Mode


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	15.521
Middle	2437	15.423
High	2462	15.472


802.11g Mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	16.609
Middle	2437	17.381
High	2462	16.602


99% BANDWIDTH (802.11b MODE)

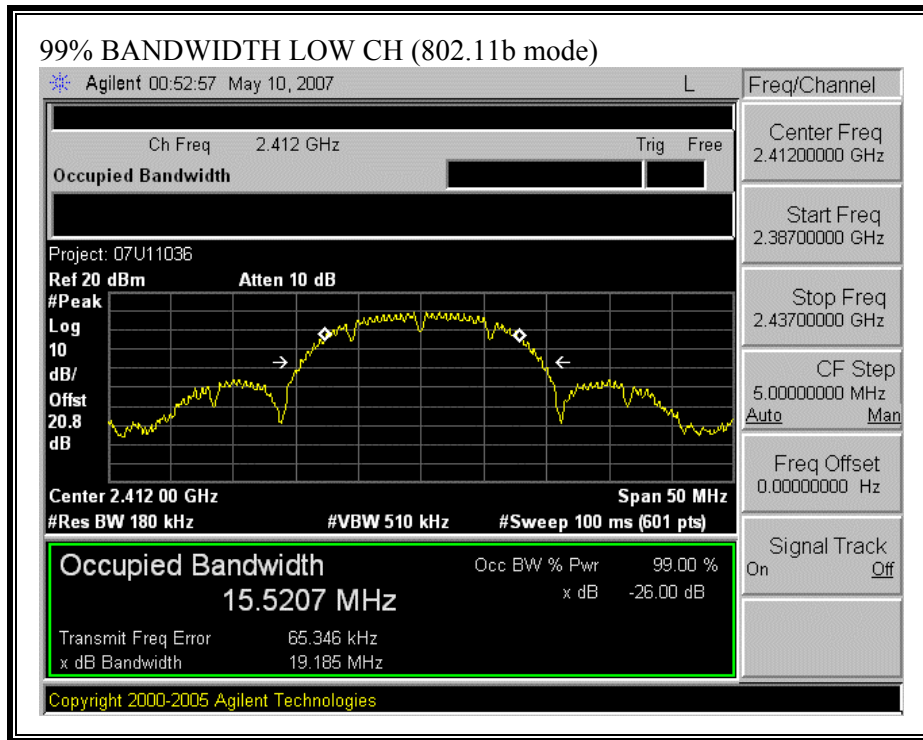


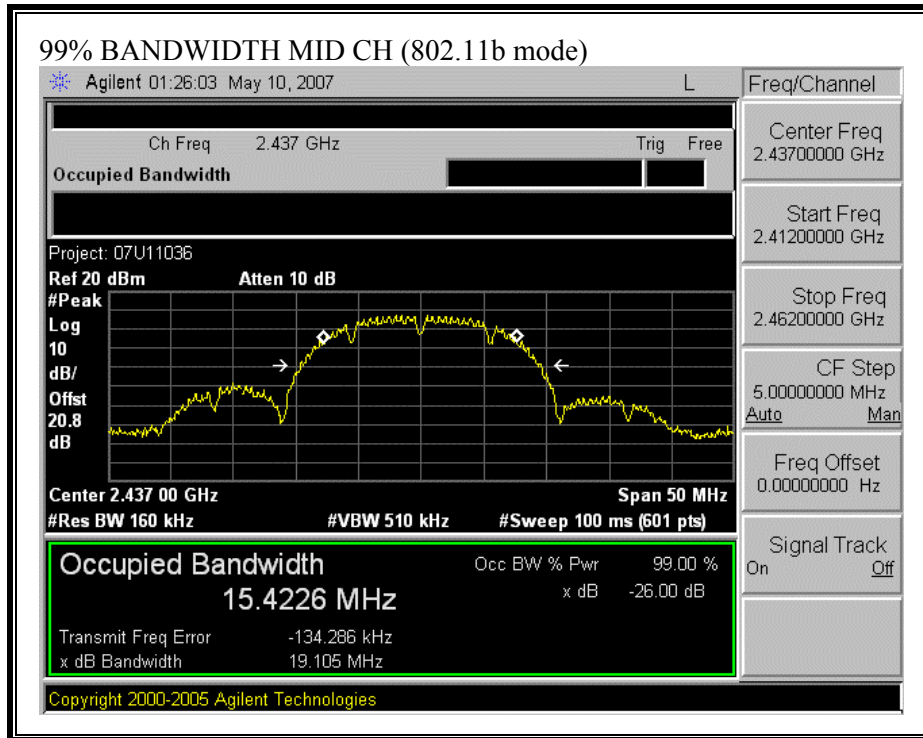


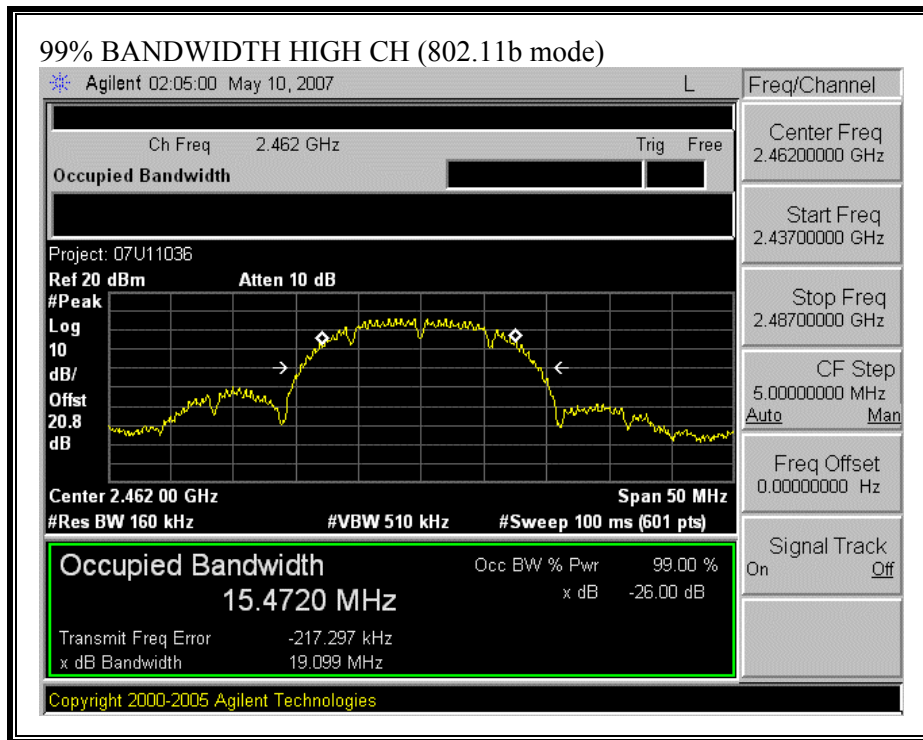

99% BANDWIDTH (802.11g MODE)

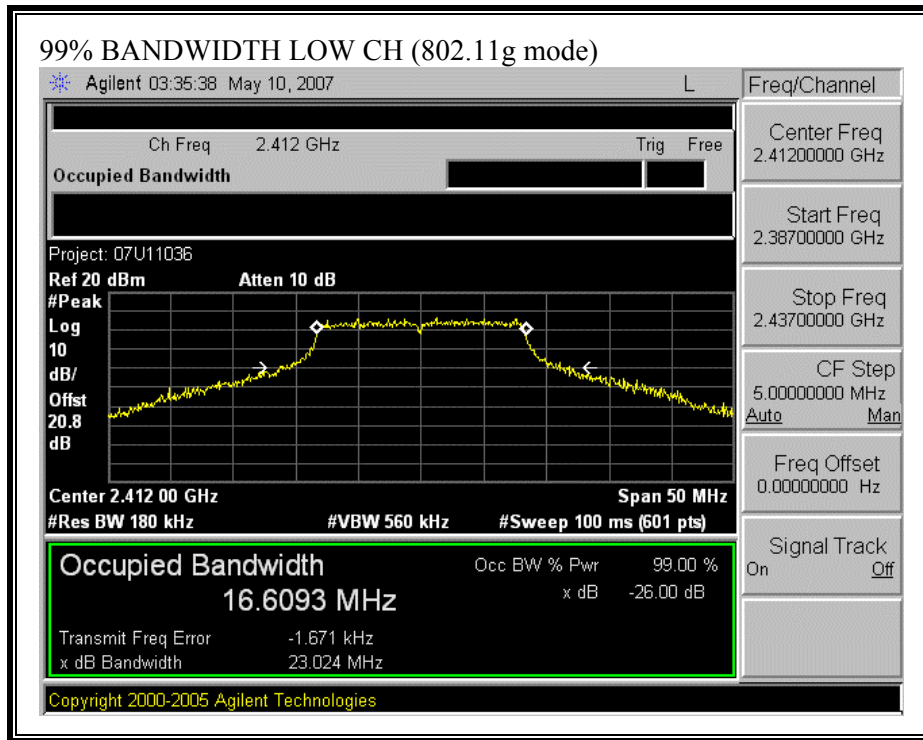

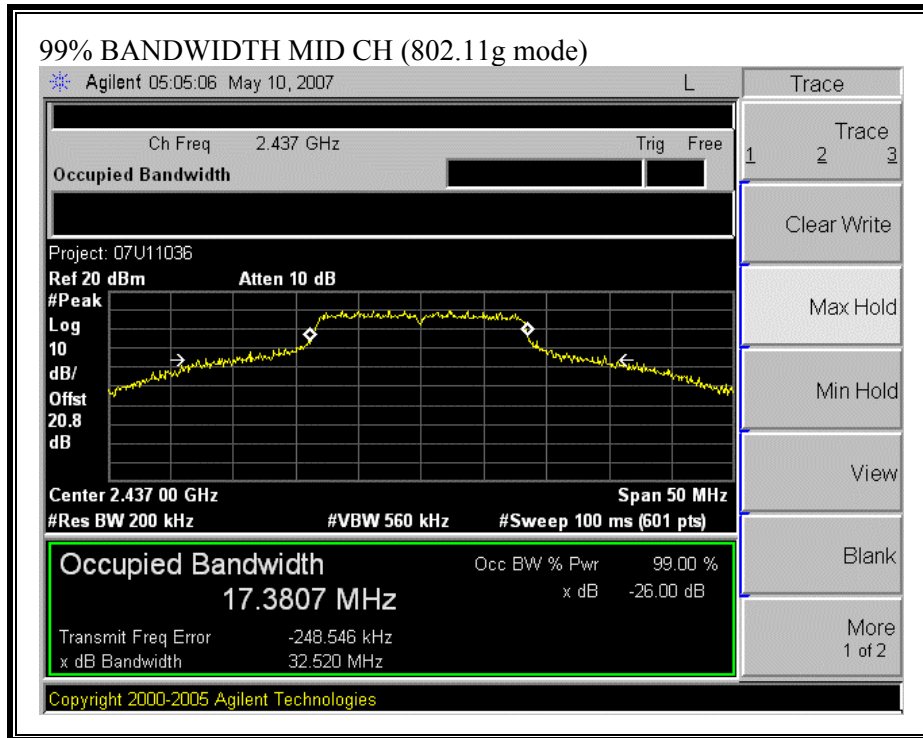

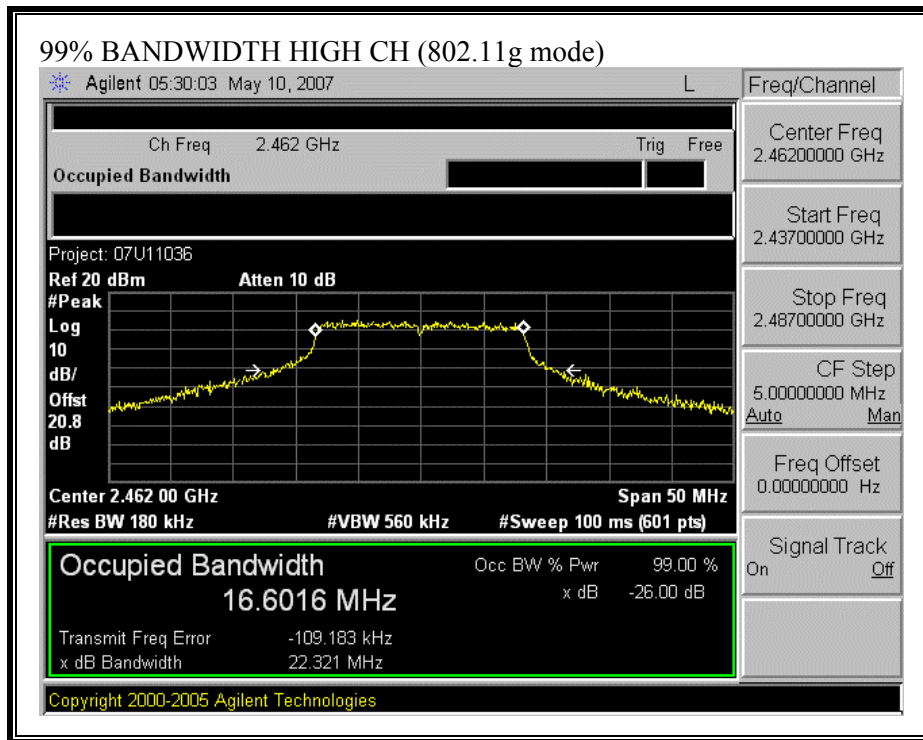

7.1.3. PEAK OUTPUT POWER

PEAK POWER LIMIT

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt.

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

§15.247 (b) (4) (i) Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.

RESULTS

The maximum antenna gain is 3.0 dBi for other than fixed, point-to-point operations, therefore the limit is 30 dBm.

No non-compliance noted:


802.11b Mode


Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	21.31	30	-8.69
Middle	2437	19.29	30	-10.71
High	2462	18.19	30	-11.81


802.11g Mode

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	19.69	30	-10.31
Middle	2437	22.54	30	-7.46
High	2462	18.91	30	-11.09


OUTPUT POWER (802.11b MODE)

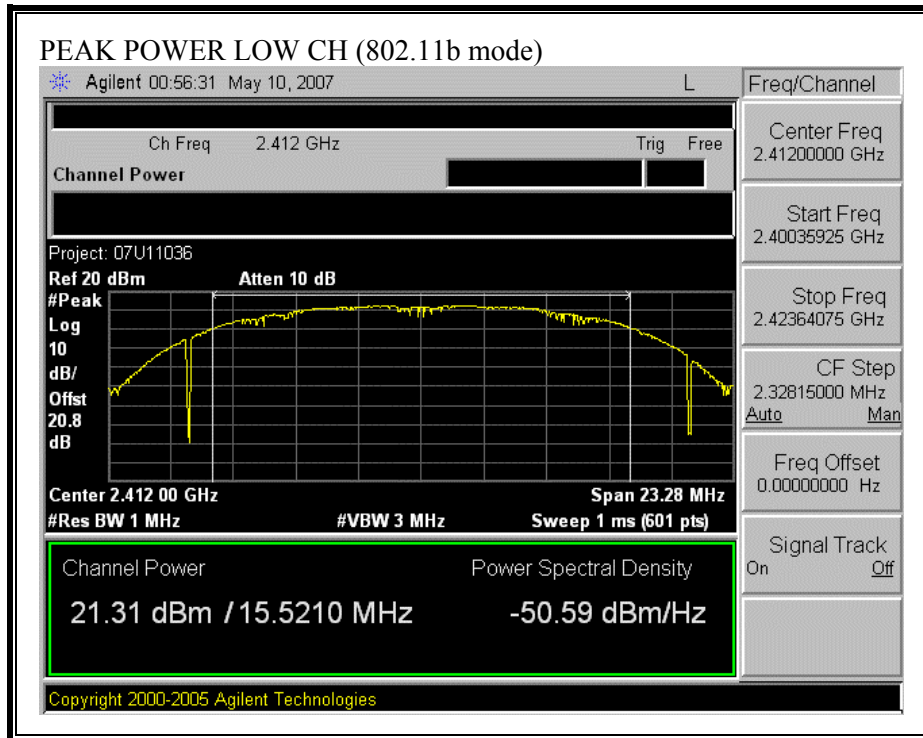


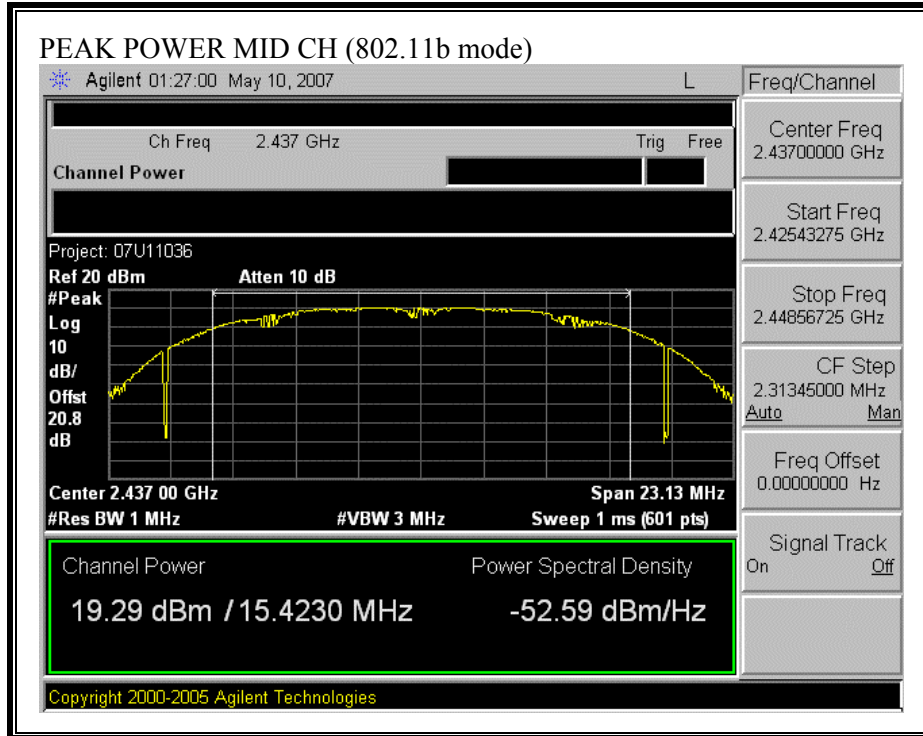


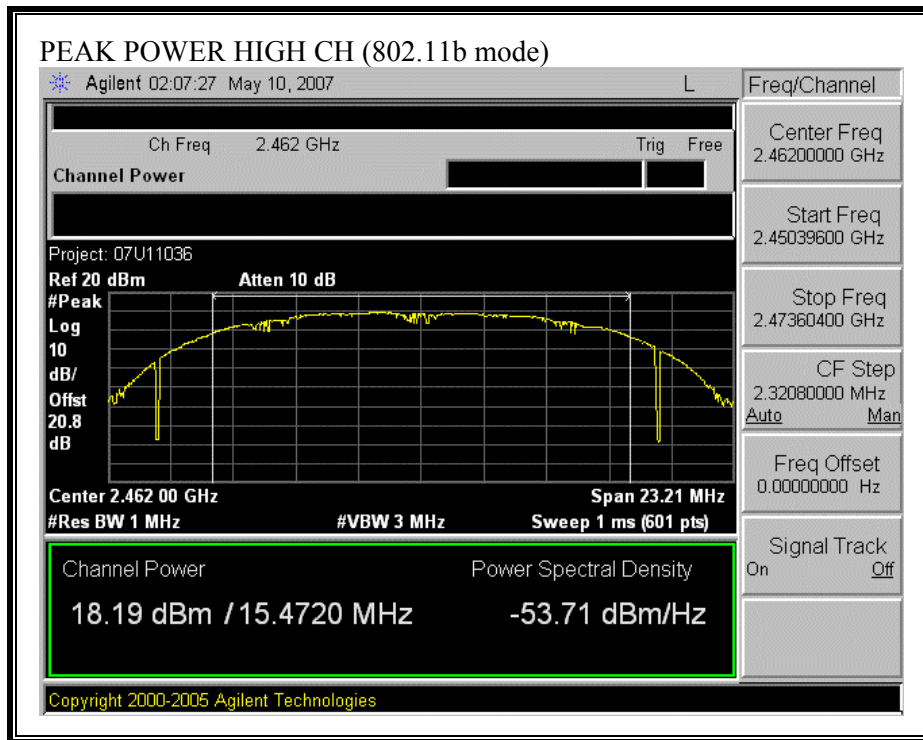

OUTPUT POWER (802.11g MODE)

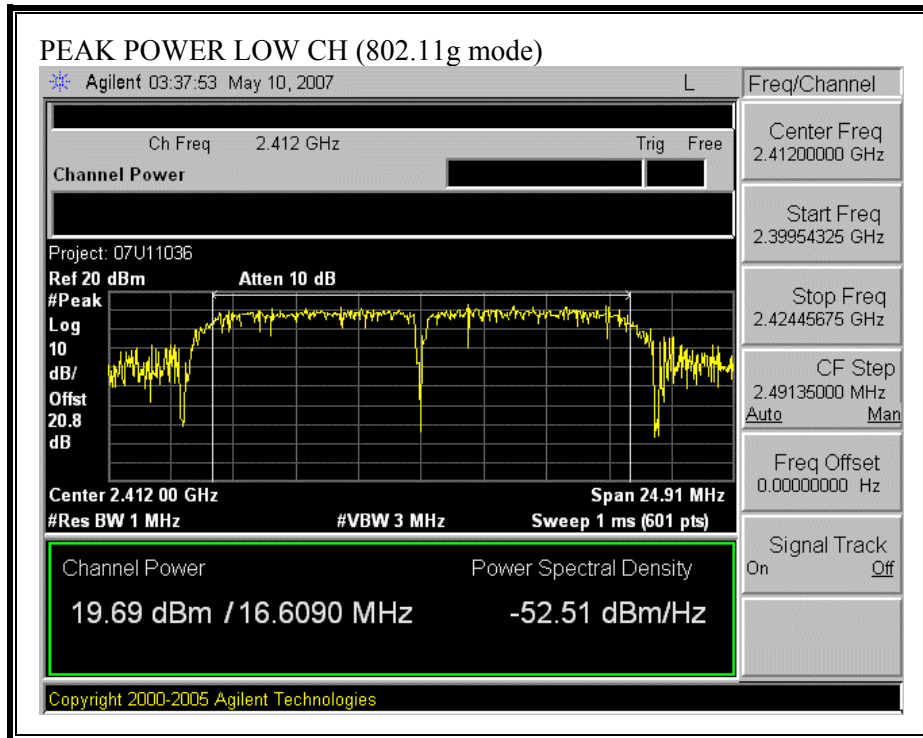

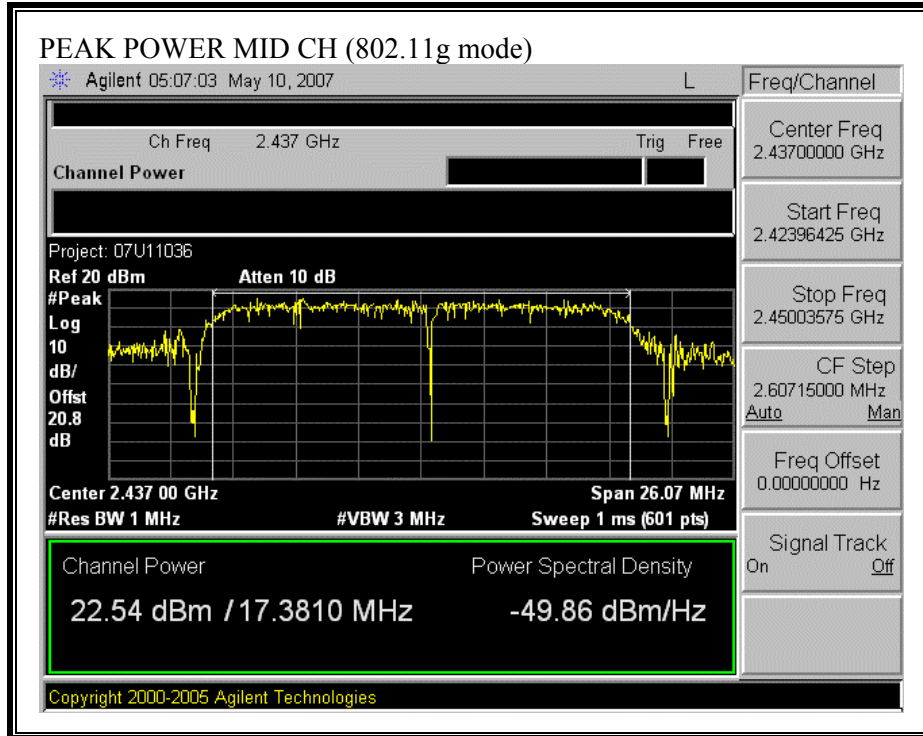

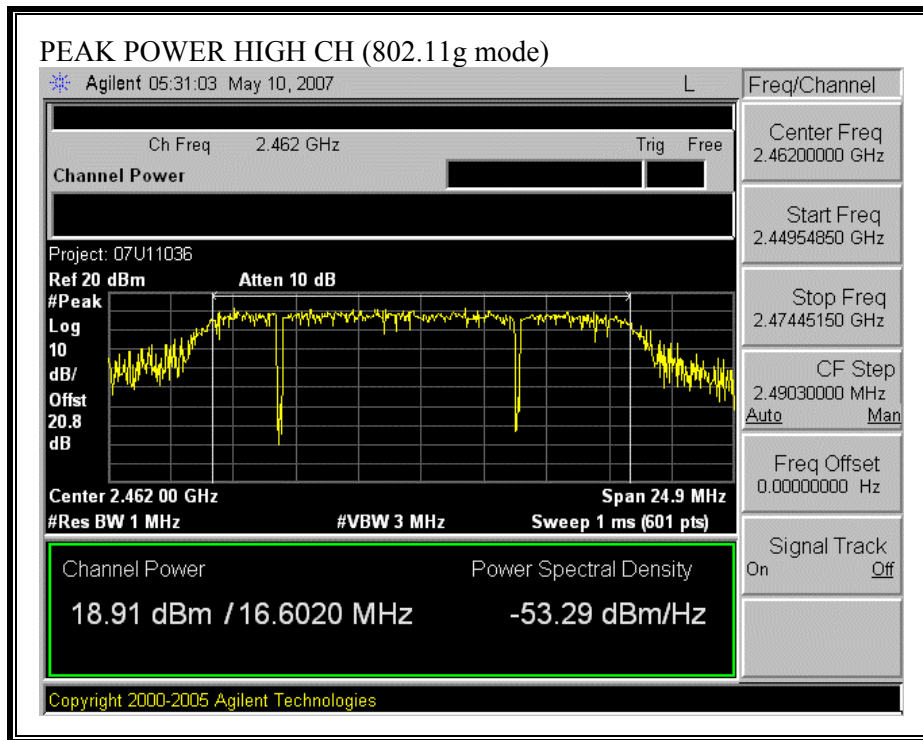

7.1.4. MAXIMUM PERMISSIBLE EXPOSURE

LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500	f/300	6
1500–100,000	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500	f/1500	30
1500–100,000	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations and rearranging the terms to express the distance as a function of the remaining variables yields:

$$d = \sqrt{((30 * P * G) / (3770 * S))}$$

Changing to units of Power to mW and Distance to cm, using:

$$P \text{ (mW)} = P \text{ (W)} / 1000 \text{ and}$$

$$d \text{ (cm)} = 100 * d \text{ (m)}$$

yields

$$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d = distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power Density in mW/cm²

Substituting the logarithmic form of power and gain using:

$$P \text{ (mW)} = 10^{(P \text{ (dBm)} / 10)} \text{ and}$$

$$G \text{ (numeric)} = 10^{(G \text{ (dBi)} / 10)}$$

yields

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm²

Rearranging terms to calculate the power density at a specific distance yields

$$S = 0.0795 * 10^{((P + G) / 10)} / (d^2)$$

LIMITS

From §1.1310 Table 1 (B), the maximum value of $S = 1.0 \text{ mW/cm}^2$

RESULTS

No non-compliance noted: (MPE distance equals 20 cm)

Mode	MPE Distance (cm)	Output Power (dBm)	Antenna Gain (dBi)	Power Density (mW/cm²)
802.11b	20.0	21.31	3.00	0.05
802.11g	20.0	22.54	3.00	0.07

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

7.1.5. AVERAGE POWER

AVERAGE POWER LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

No non-compliance noted:

The cable assembly insertion loss of 20.78 dB (including 20 dB pad and 0.78 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

802.11b Mode

Channel	Frequency (MHz)	Power (dBm)
Low	2412	18.91
Middle	2437	16.85
High	2462	15.57

802.11g Mode

Channel	Frequency (MHz)	Power (dBm)
Low	2412	16.51
Middle	2437	19.23
High	2462	15.36

7.1.6. PEAK POWER SPECTRAL DENSITY

LIMIT

§15.247 (d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer, the maximum level in a 3 kHz bandwidth is measured with the spectrum analyzer using RBW = 3 kHz and VBW > 3 kHz, sweep time = span / 3 kHz, and video averaging is turned off. The PPSD is the highest level found across the emission in any 3 kHz band.

RESULTS

No non-compliance noted:


802.11b Mode


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-5.29	8	-13.29
Middle	2437	-7.43	8	-15.43
High	2462	-8.43	8	-16.43


802.11g Mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-8.13	8	-16.13
Middle	2437	-4.30	8	-12.30
High	2462	-9.09	8	-17.09


PEAK POWER SPECTRAL DENSITY (802.11b MODE)

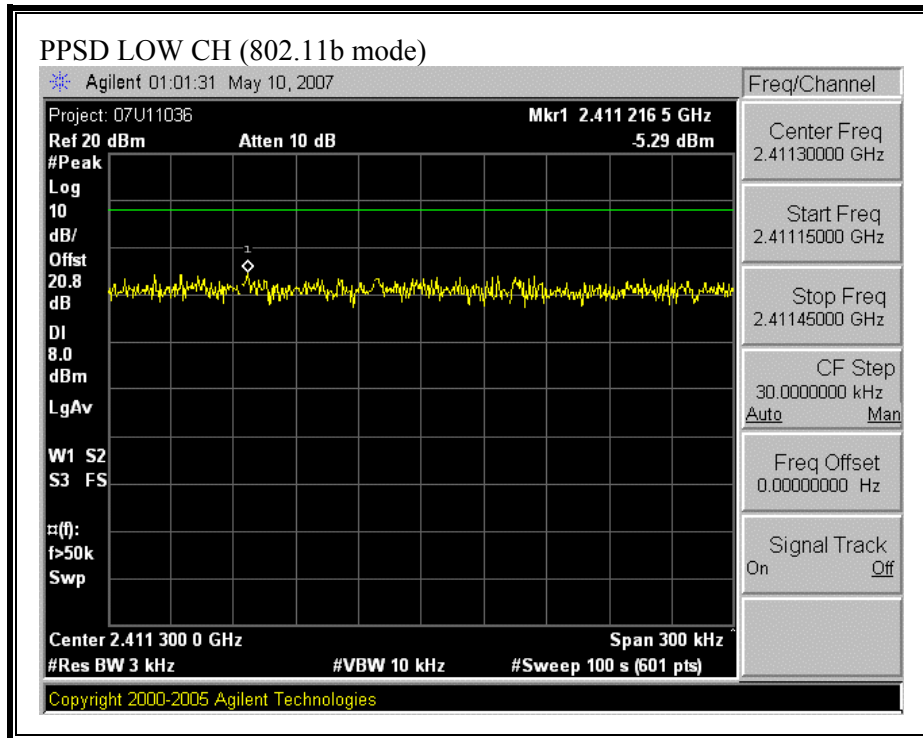


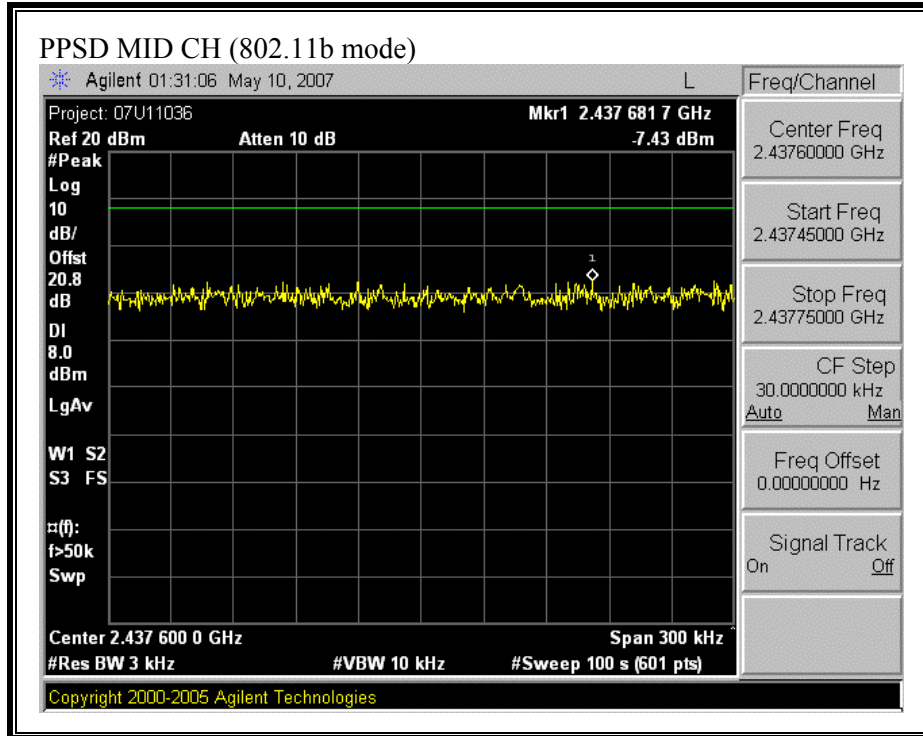


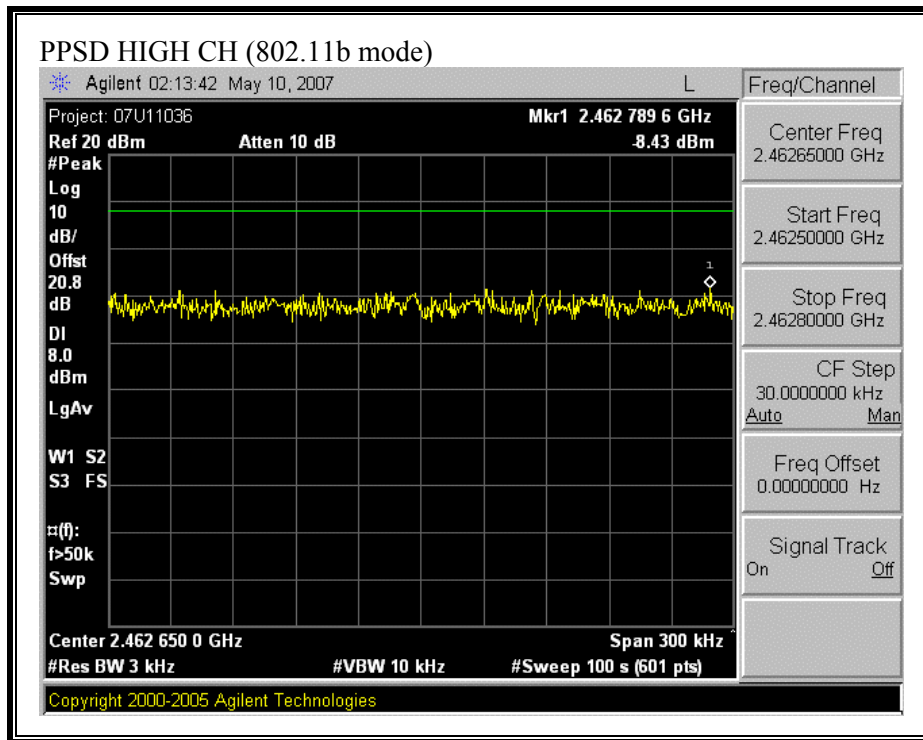

PEAK POWER SPECTRAL DENSITY (802.11g MODE)

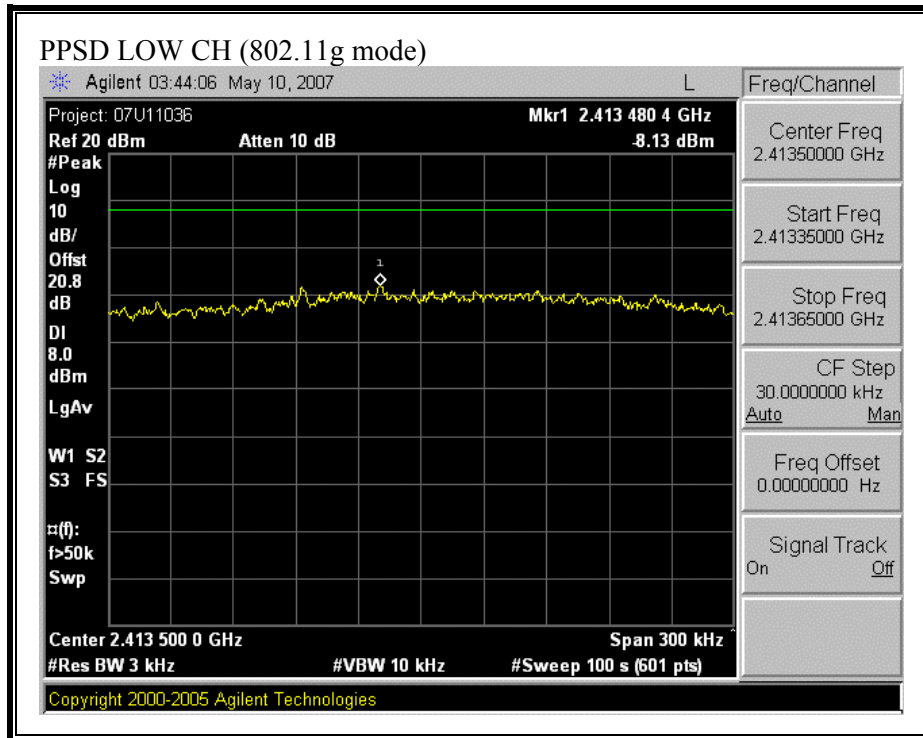

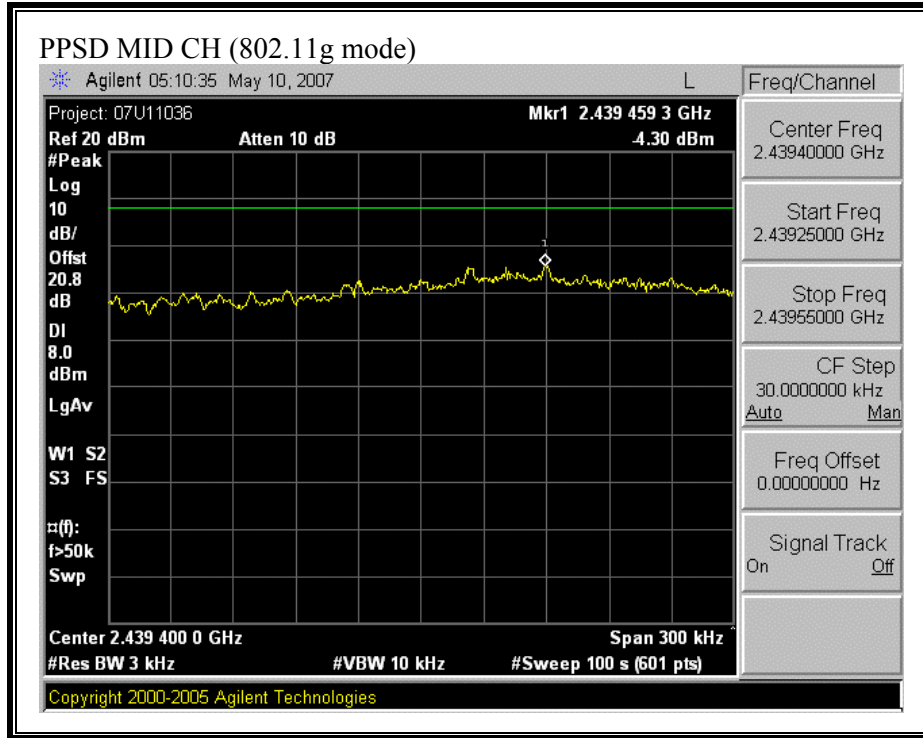

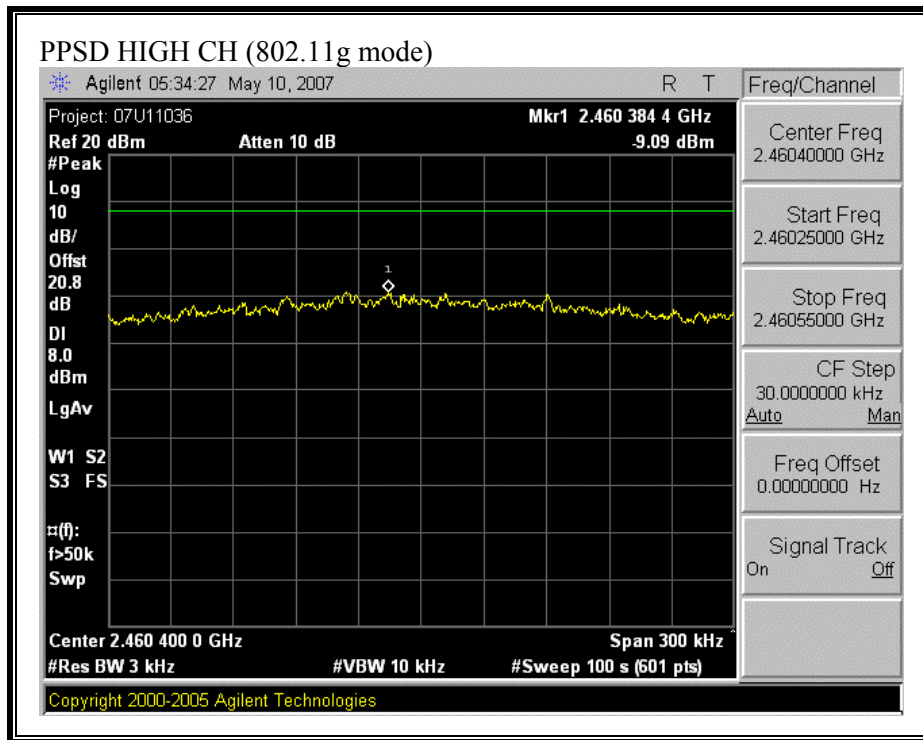

7.1.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

§15.247 (c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Conducted power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

RESULTS


No non-compliance noted:


SPURIOUS EMISSIONS, LOW CHANNEL (802.11b MODE)

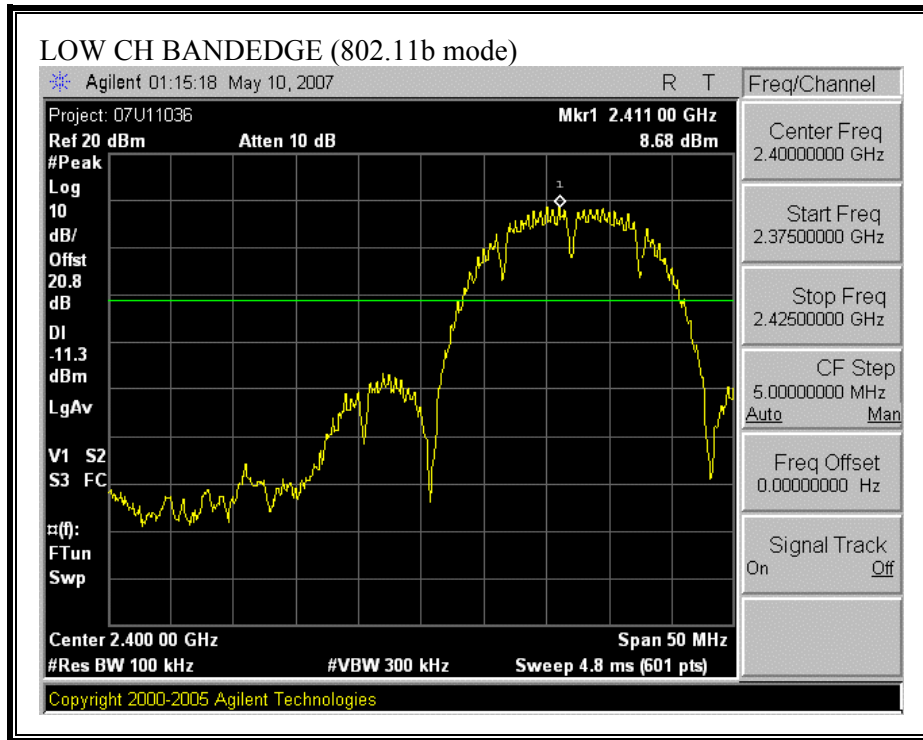

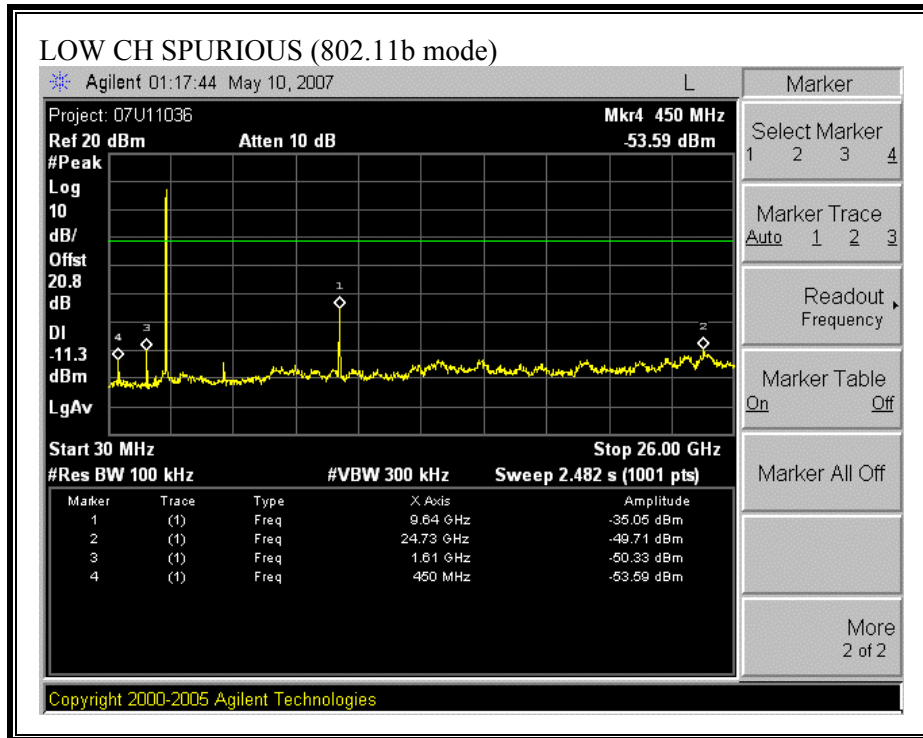



SPURIOUS EMISSIONS, MID CHANNEL (802.11b MODE)

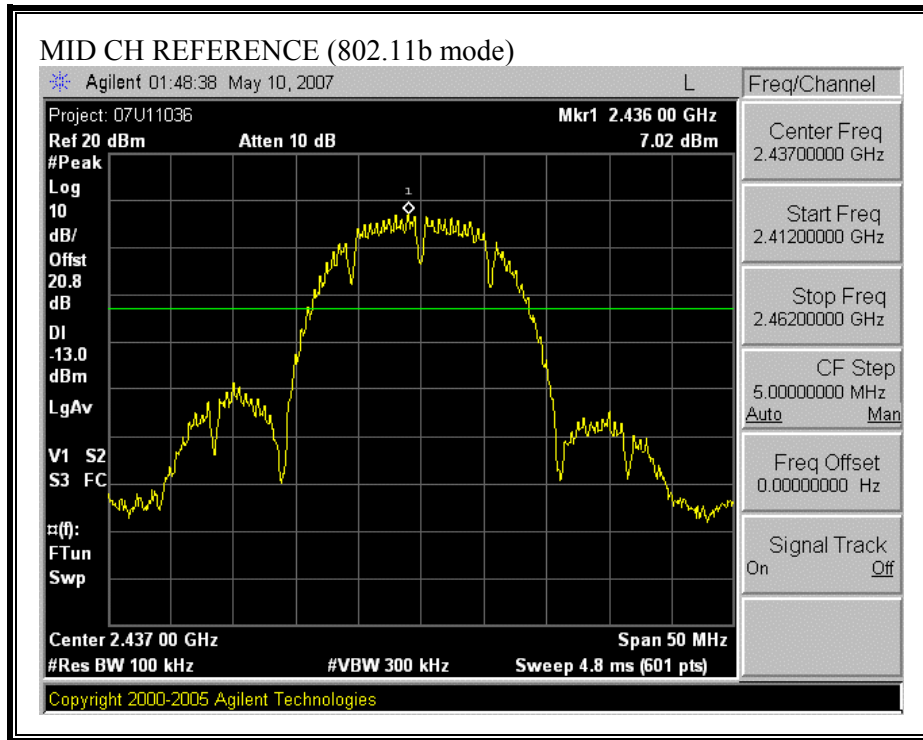

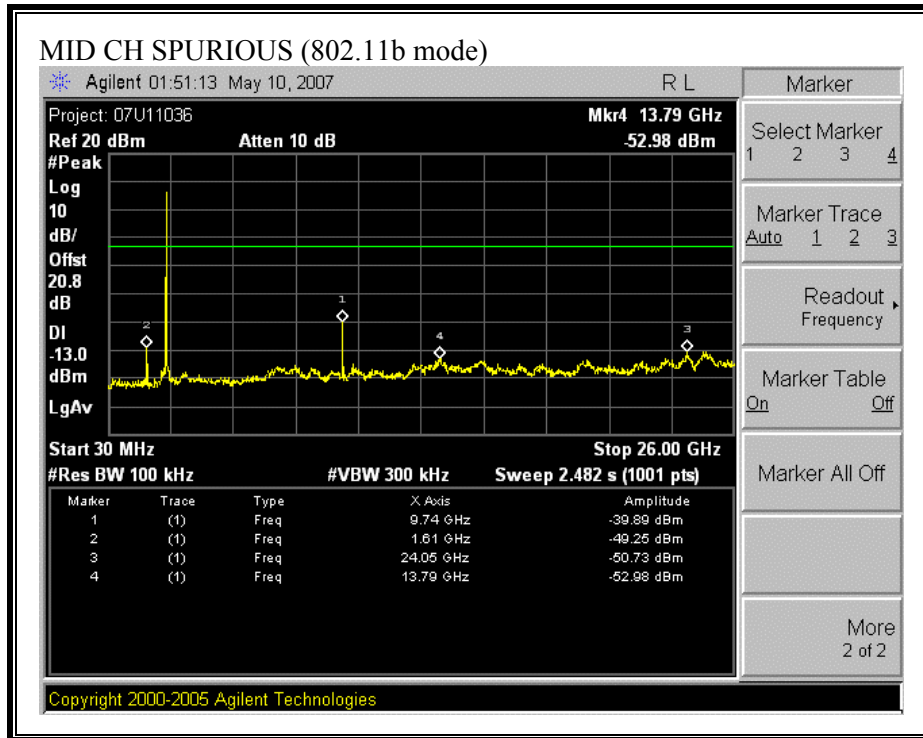



SPURIOUS EMISSIONS, HIGH CHANNEL (802.11b MODE)

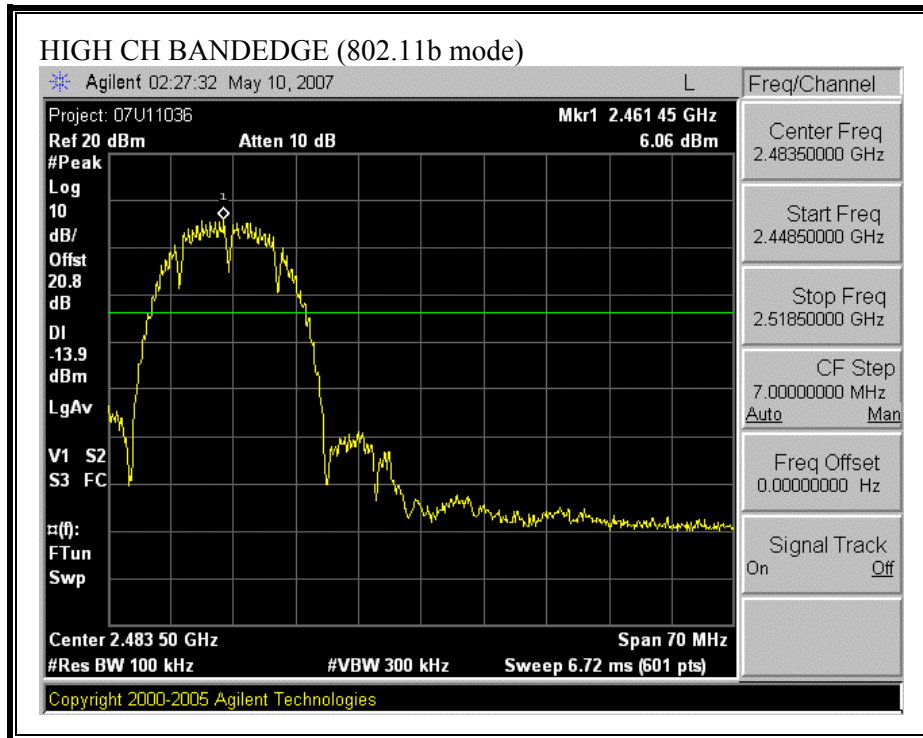

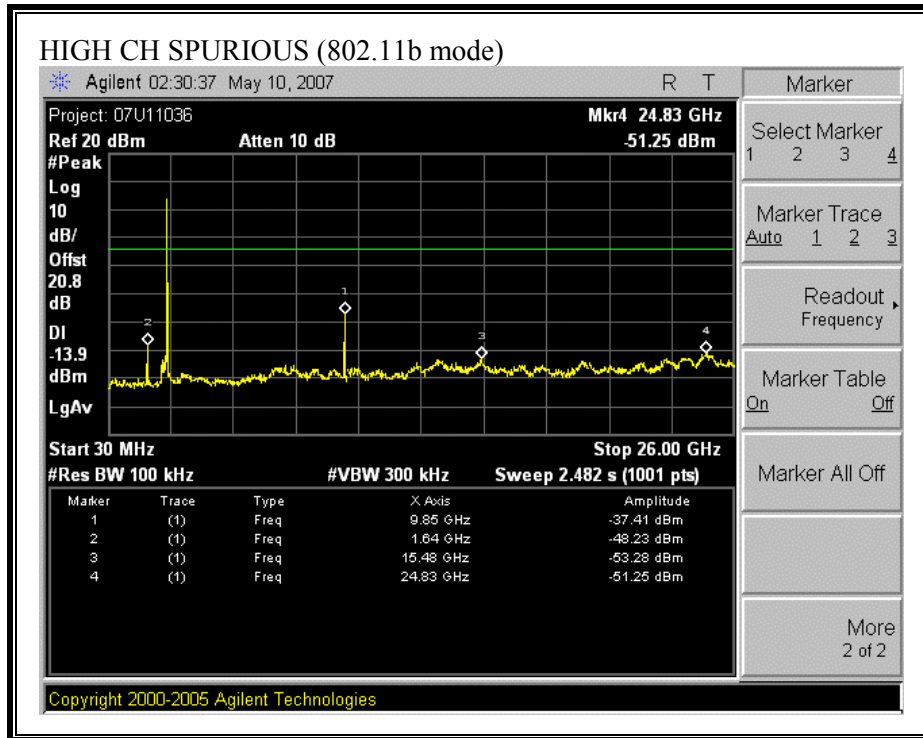



SPURIOUS EMISSIONS, LOW CHANNEL (802.11g MODE)

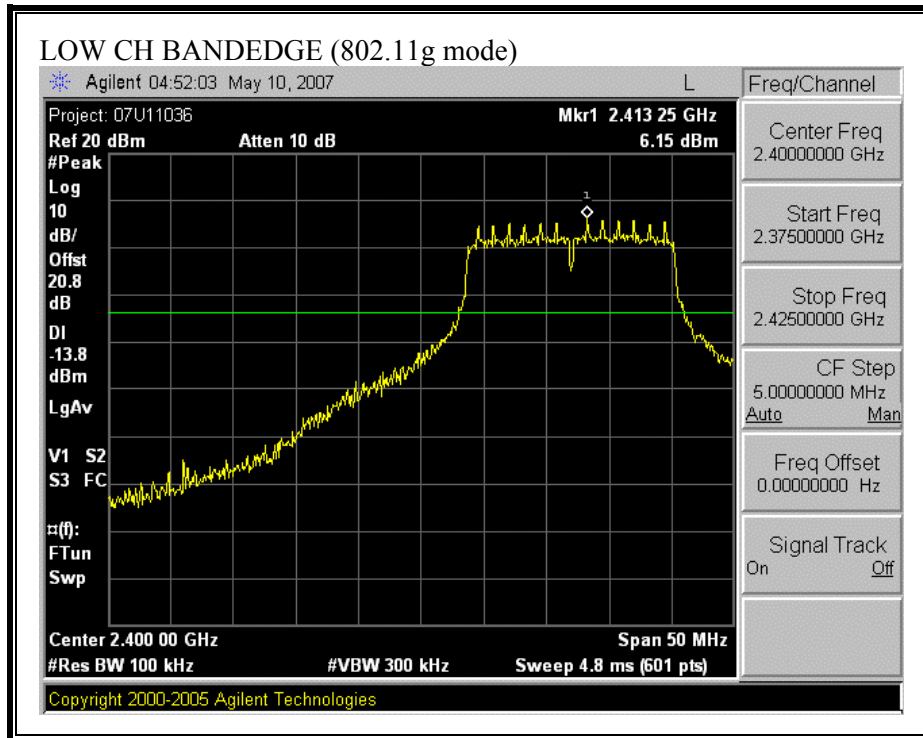

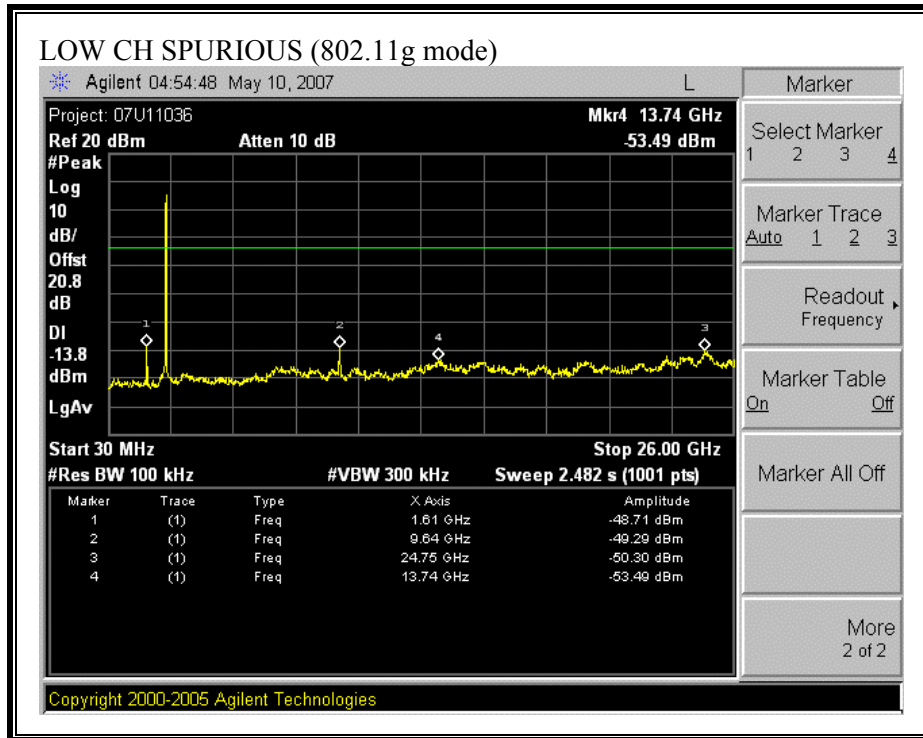



SPURIOUS EMISSIONS, MID CHANNEL (802.11g MODE)

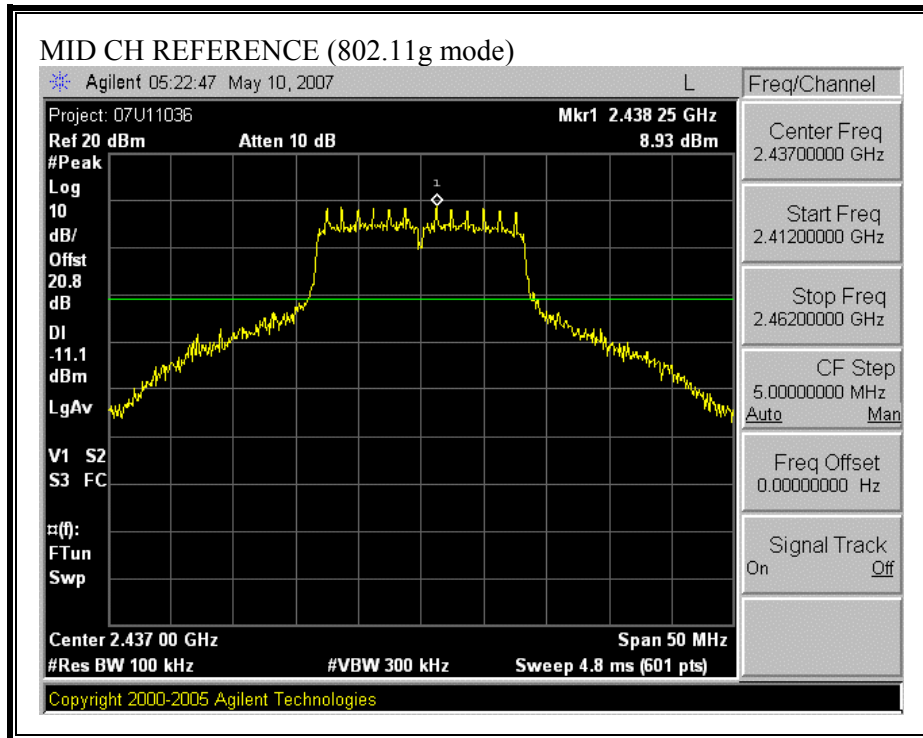

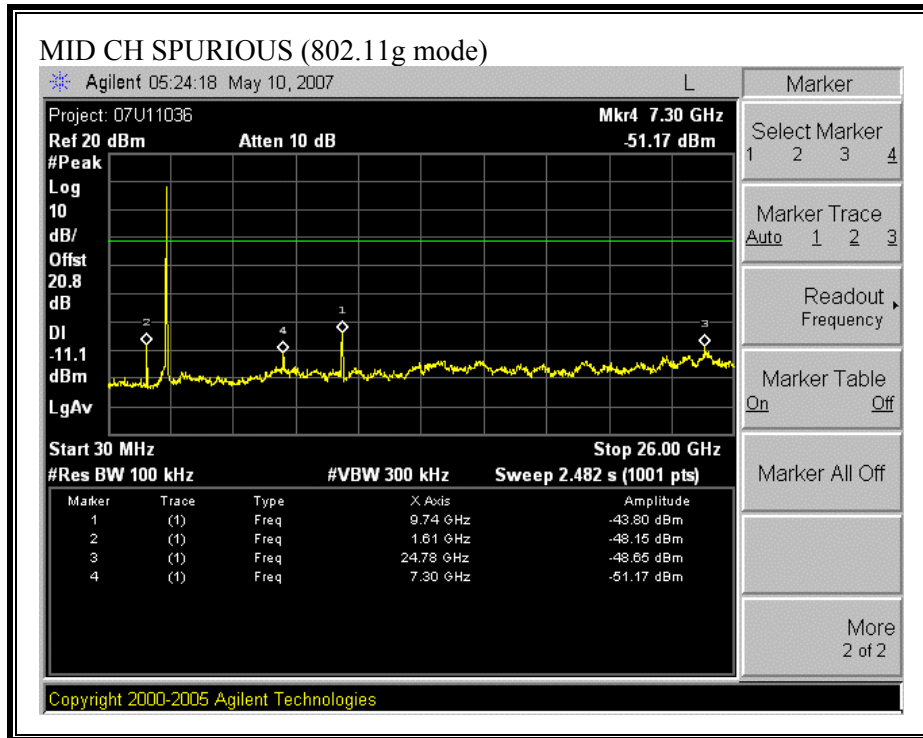

SPURIOUS EMISSIONS, HIGH CHANNEL (802.11g MODE)

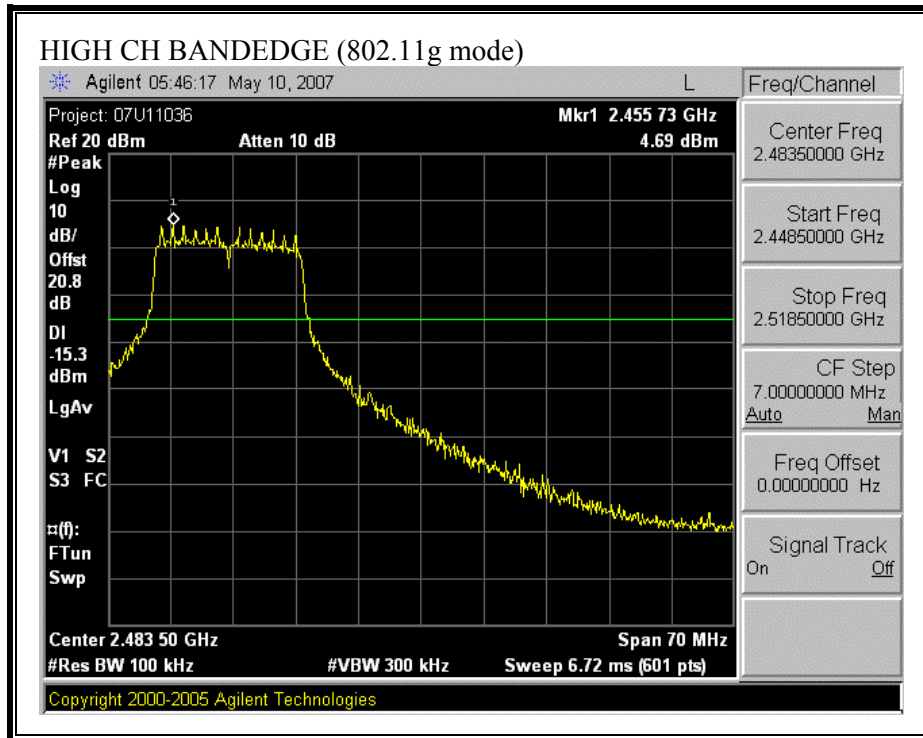

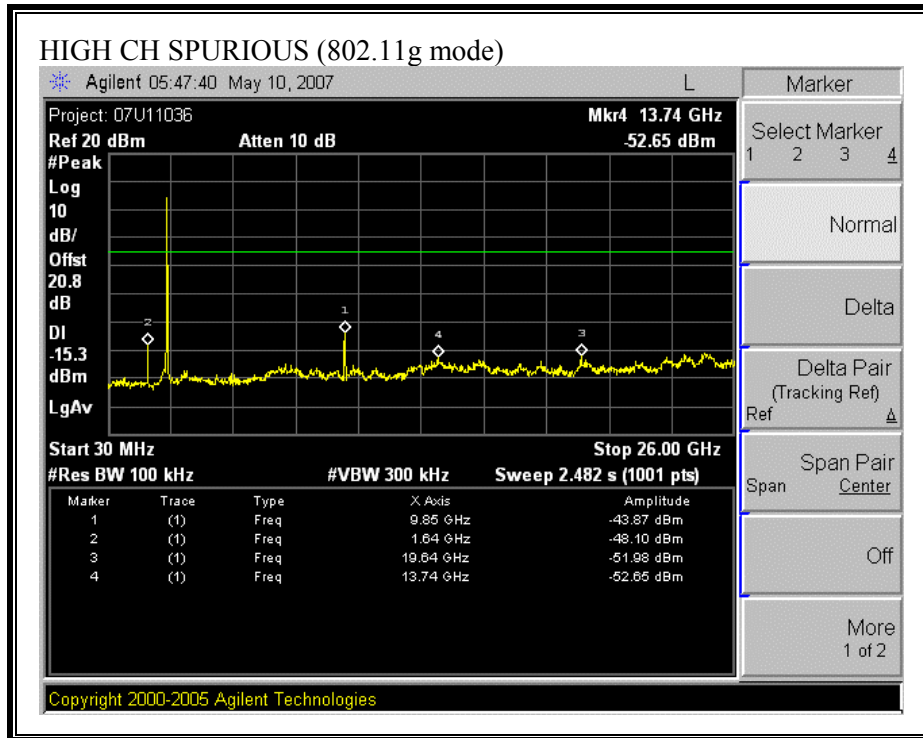

7.2. RADIATED EMISSIONS

7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each 5 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


7.2.2. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

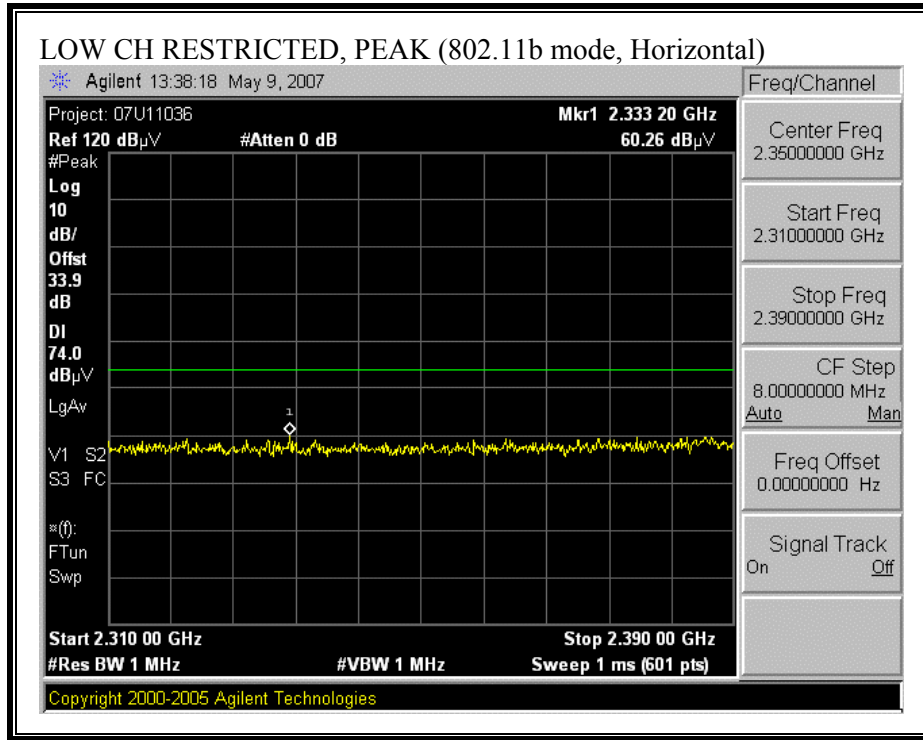

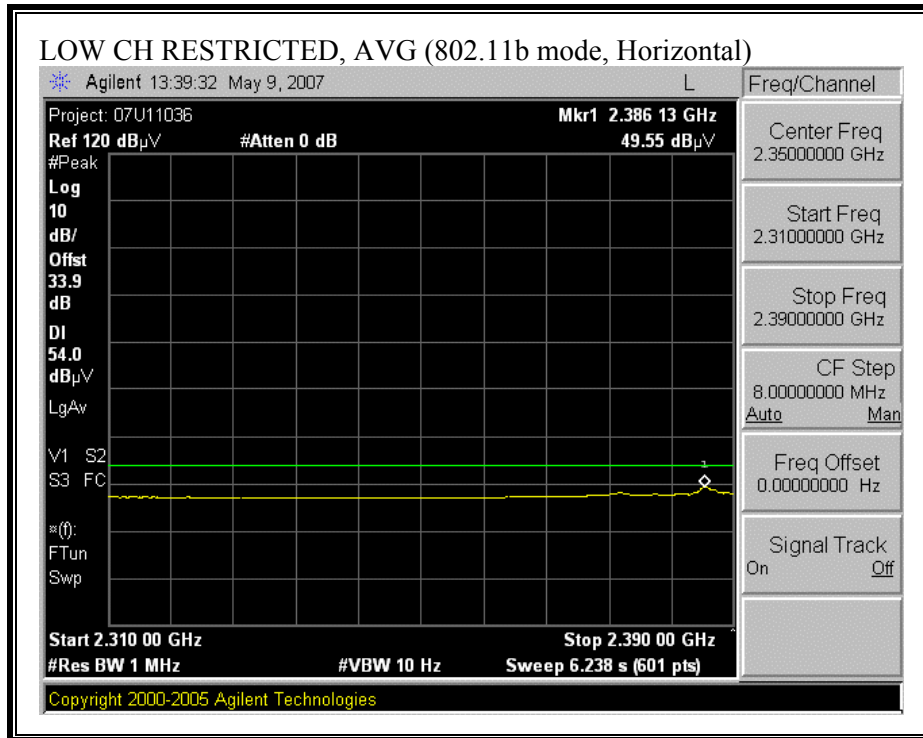



RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

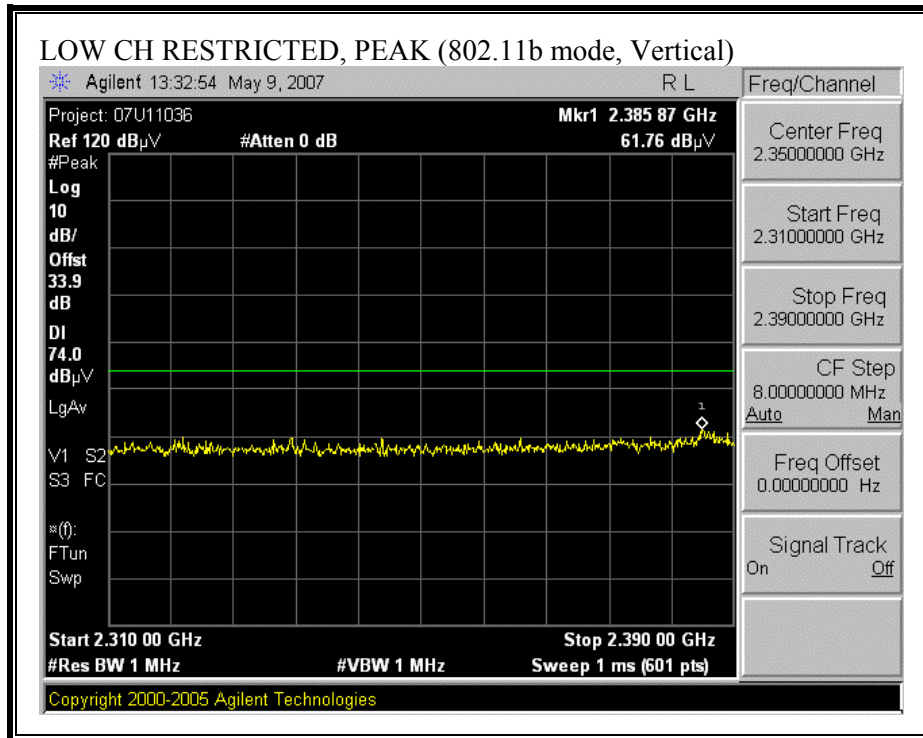

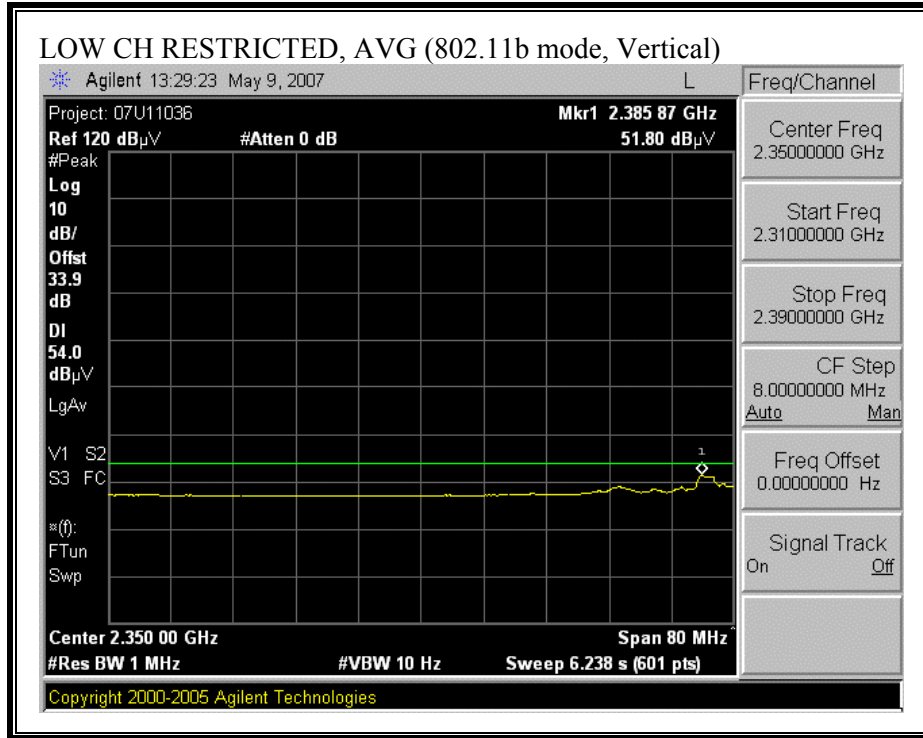



RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

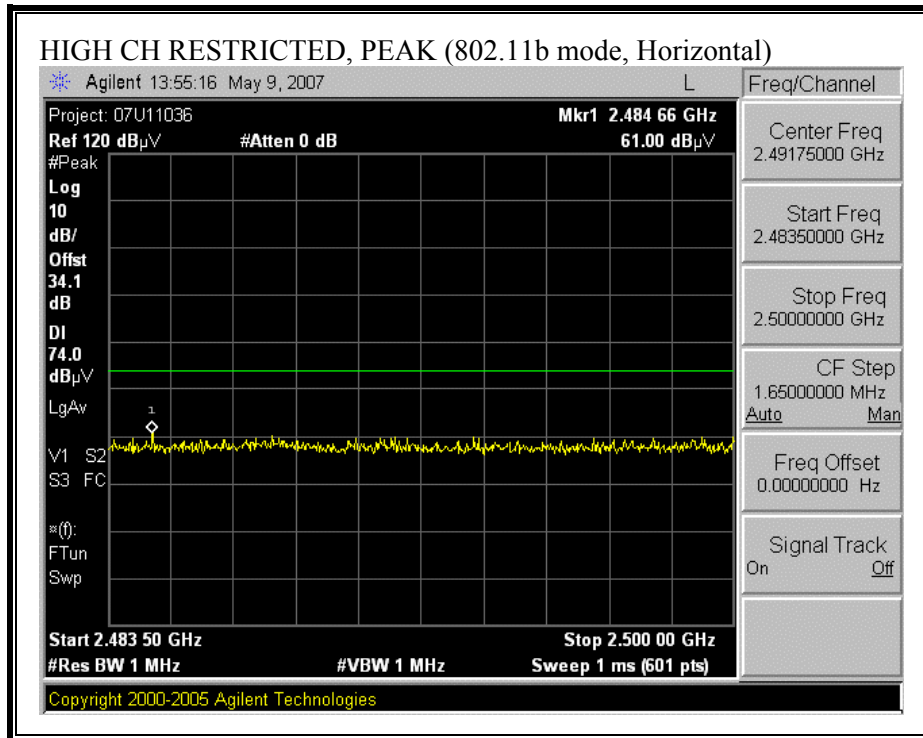

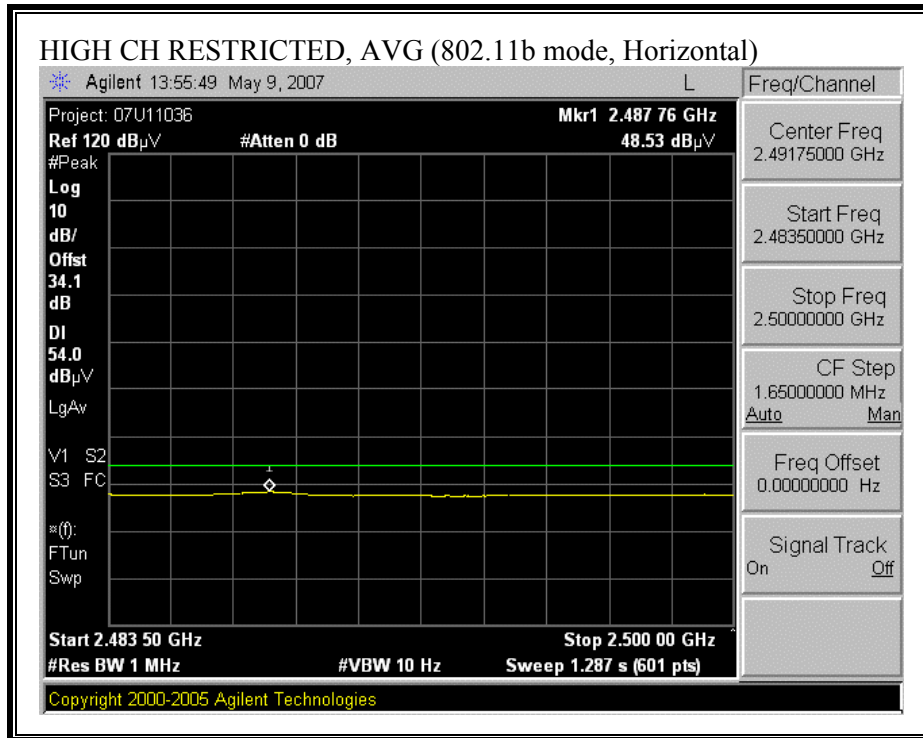

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

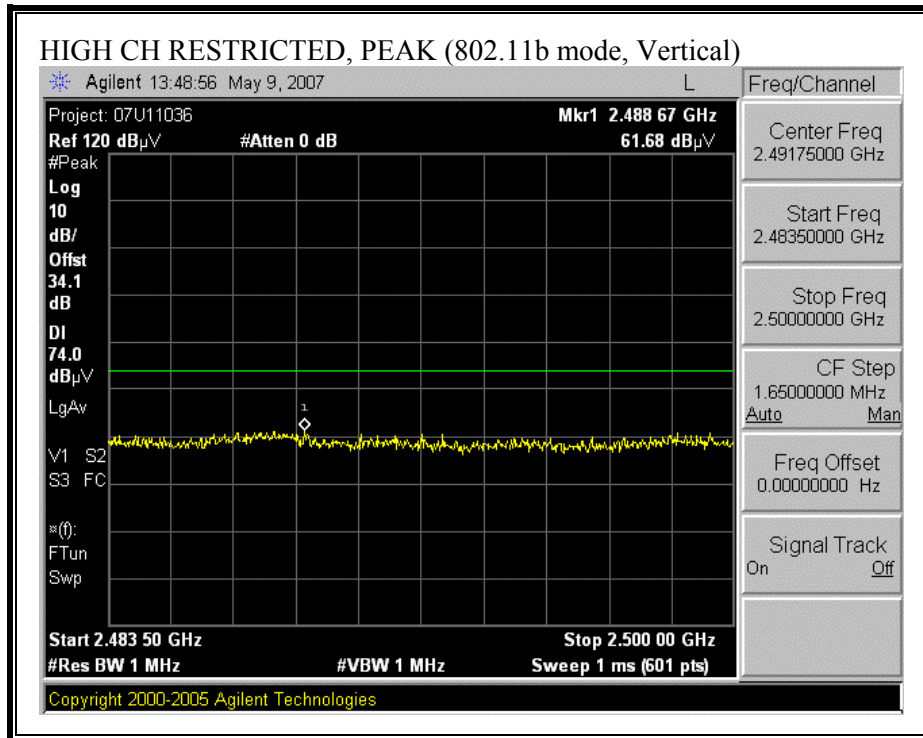


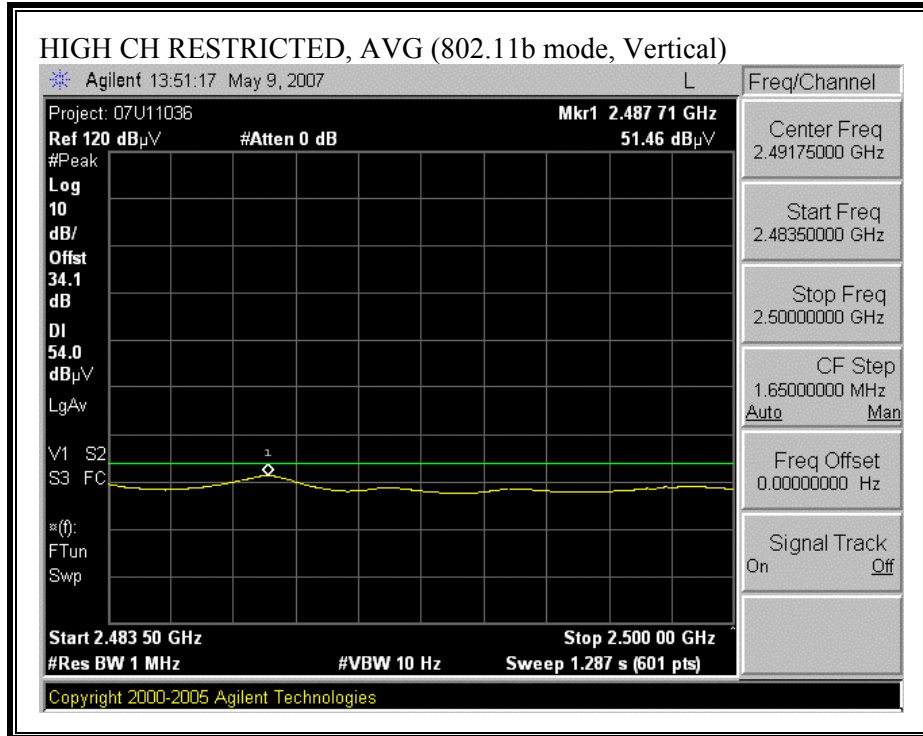


HARMONICS AND SPURIOUS EMISSIONS (b MODE)


05/09/07 High Frequency Measurement																
Compliance Certification Services, Morgan Hill Open Field Site																
Test Engr: William Zhuang																
Project #: 07U11036																
Company: Bountifull WiFi																
EUT Descr.: 802.11 b/g Access Point with Dipole Antenna																
EUT M/N: BWRG500																
Test Target:FCC 1.247																
Mode Oper: Tx On, b Mode																
f	Measurement Frequency			Amp	Preamp Gain			Avg Lim			Average Field Strength Limit					
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters			Pk Lim			Peak Field Strength Limit					
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m			Avg Mar			Margin vs. Average Limit					
AF	Antenna Factor			Peak	Calculated Peak Field Strength			Pk Mar			Margin vs. Peak Limit					
CL	Cable Loss			HPF	High Pass Filter											
b Mode, Low Ch. 2412 MHz, Att=20.5dBm																
4.824	3.0	42.4	37.4	33.3	7.7	-34.8	0.0	0.6	49.1	44.1	74.0	54.0	-24.9	-9.9	V	
7.236	3.0	44.4	39.3	34.9	9.3	-34.1	0.0	0.6	55.1	50.0	74.0	54.0	-18.9	-4.0	V	
9.648	3.0	38.4	33.1	36.7	10.4	-33.6	0.0	0.8	52.8	47.5	74.0	54.0	-21.2	-6.5	V	
4.824	3.0	37.3	28.1	33.3	7.7	-34.8	0.0	0.6	44.1	34.9	74.0	54.0	-29.9	-19.1	H	
7.236	3.0	39.1	31.0	34.9	9.3	-34.1	0.0	0.6	49.8	41.7	74.0	54.0	-24.2	-12.3	H	
9.648	3.0	37.4	29.8	36.7	10.4	-33.6	0.0	0.8	51.8	44.1	74.0	54.0	-22.2	-9.9	H	
b Mode, Mid Ch. 2437 MHz, Att=19dBm																
4.874	3.0	42.3	37.9	33.4	7.7	-34.8	0.0	0.6	49.2	44.8	74.0	54.0	-24.8	-9.2	V	
7.311	3.0	46.9	42.7	35.0	9.3	-34.1	0.0	0.6	57.7	53.5	74.0	54.0	-16.3	-0.5	V	
9.748	3.0	41.9	38.4	36.8	10.5	-33.3	0.0	0.8	56.6	53.1	74.0	54.0	-17.4	-0.9	V	
4.874	3.0	39.4	32.3	33.4	7.7	-34.8	0.0	0.6	46.3	39.1	74.0	54.0	-27.7	-14.9	H	
7.311	3.0	40.9	33.2	35.0	9.3	-34.1	0.0	0.6	51.7	44.1	74.0	54.0	-22.3	-9.9	H	
9.748	3.0	37.8	32.4	36.8	10.5	-33.3	0.0	0.8	52.5	47.1	74.0	54.0	-21.5	-6.9	H	
b Mode, High Ch. 2462 MHz, Att=18dBm																
4.924	3.0	43.8	40.6	33.4	7.8	-34.8	0.0	0.6	50.8	47.6	74.0	54.0	-23.2	-6.4	V	
7.386	3.0	42.7	36.2	35.0	9.3	-34.1	0.0	0.6	53.6	47.1	74.0	54.0	-20.4	-6.9	V	
9.848	3.0	41.2	37.9	36.8	10.5	-33.1	0.0	0.8	56.3	53.0	74.0	54.0	-17.7	-1.0	V	
4.924	3.0	39.0	31.9	33.4	7.8	-34.8	0.0	0.6	46.0	38.9	74.0	54.0	-28.0	-15.1	H	
7.386	3.0	38.4	30.1	35.0	9.3	-34.1	0.0	0.6	49.3	41.0	74.0	54.0	-24.7	-13.0	H	
9.848	3.0	38.0	31.9	36.8	10.5	-33.1	0.0	0.8	53.1	47.1	74.0	54.0	-20.9	-6.9	H	


RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)

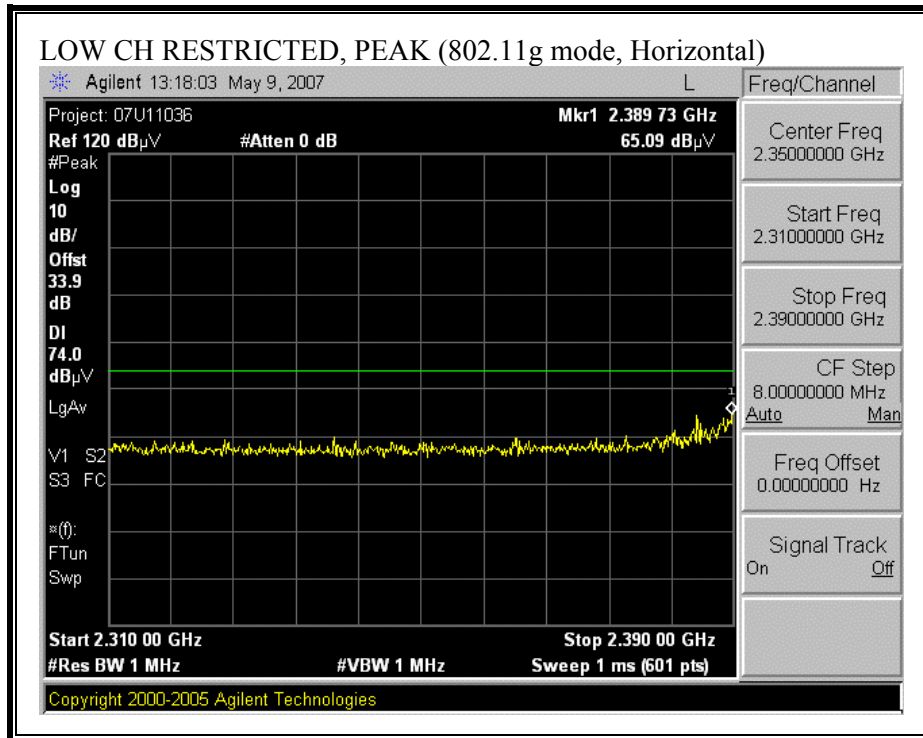

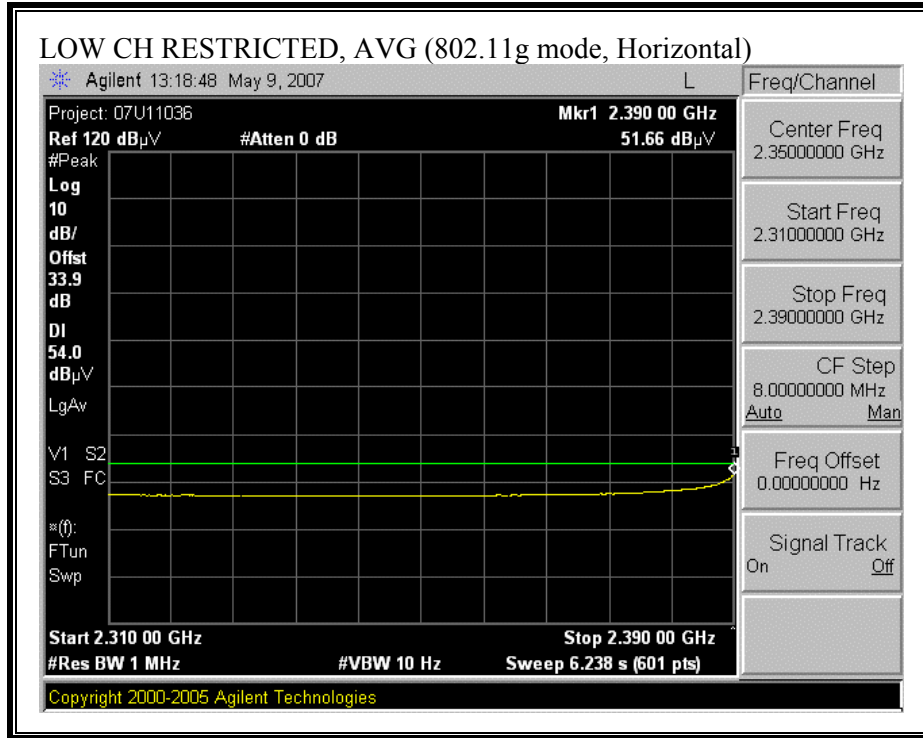



RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)

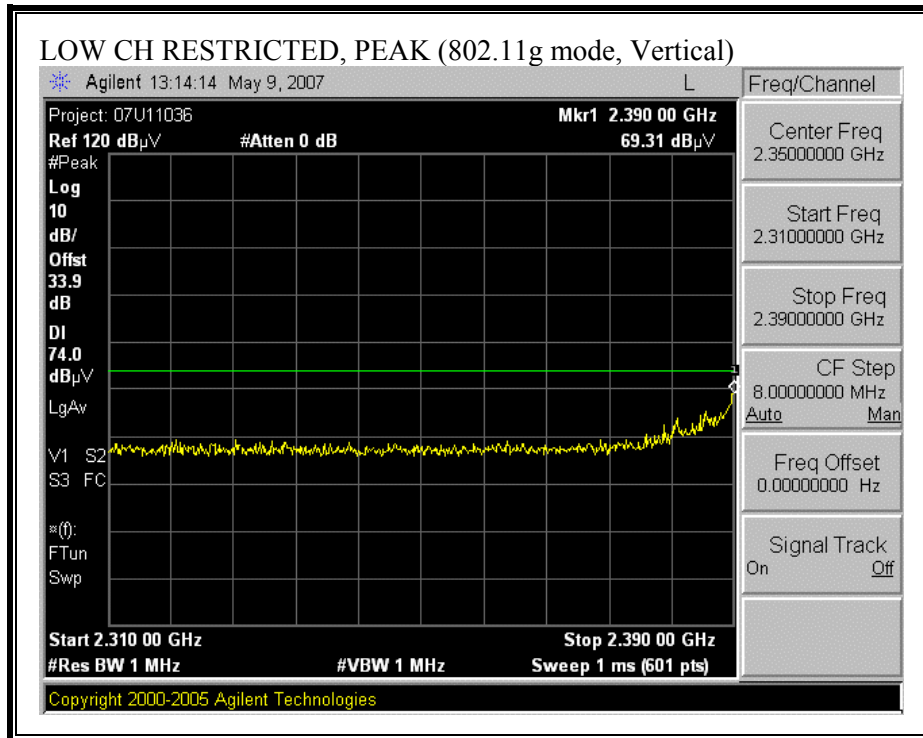

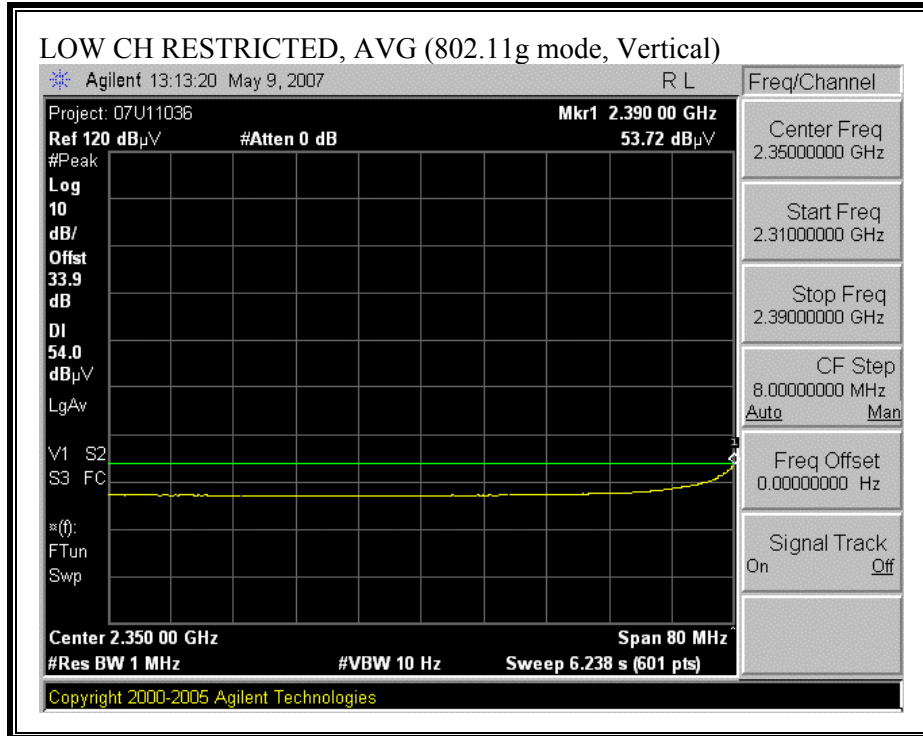



RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)

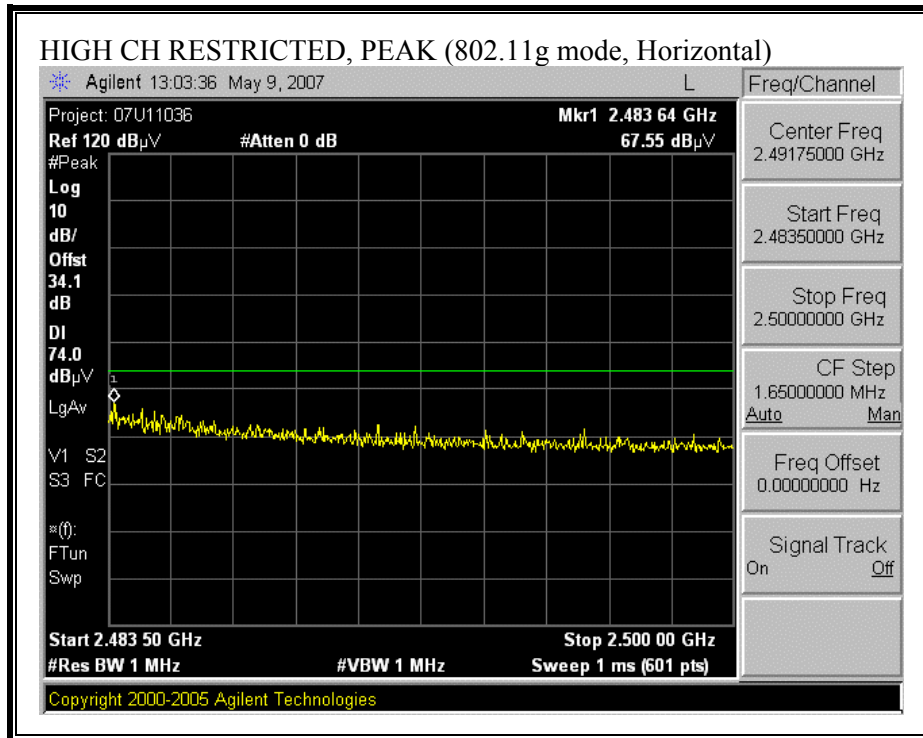

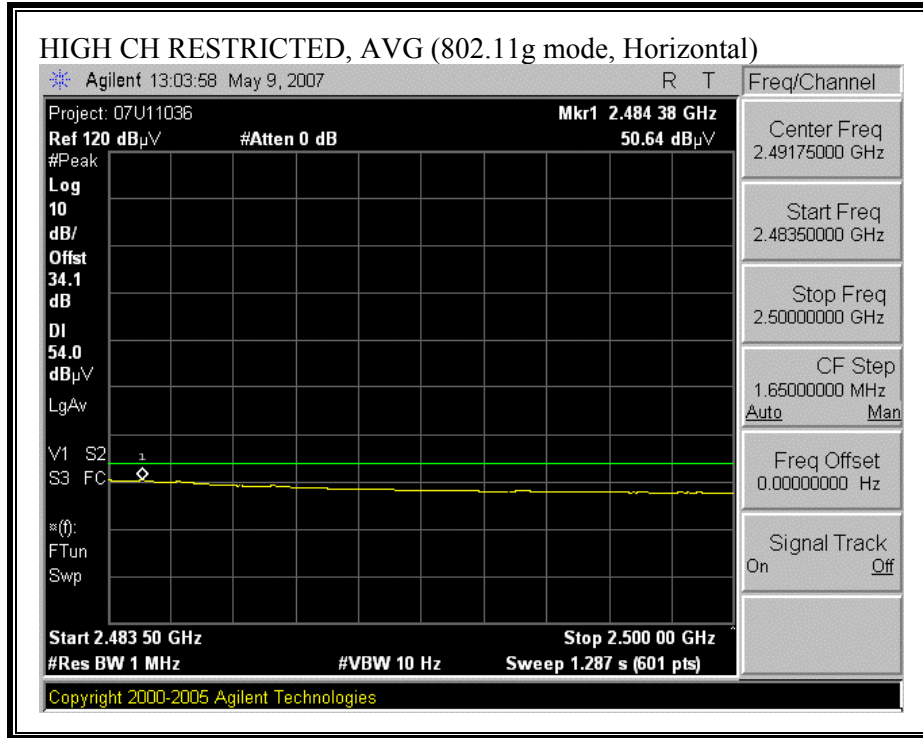

RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)

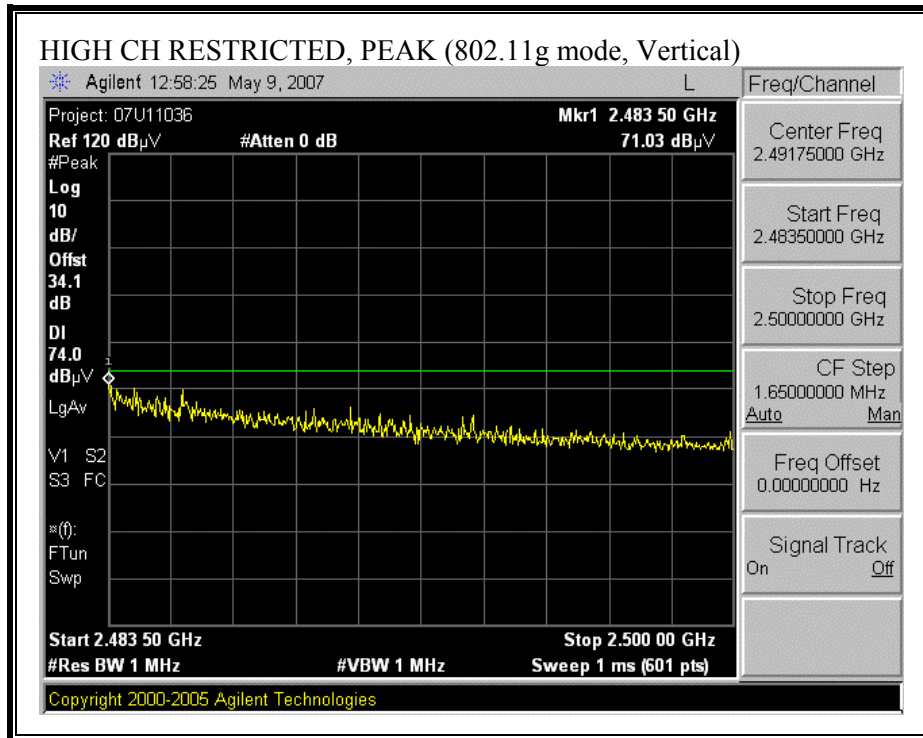

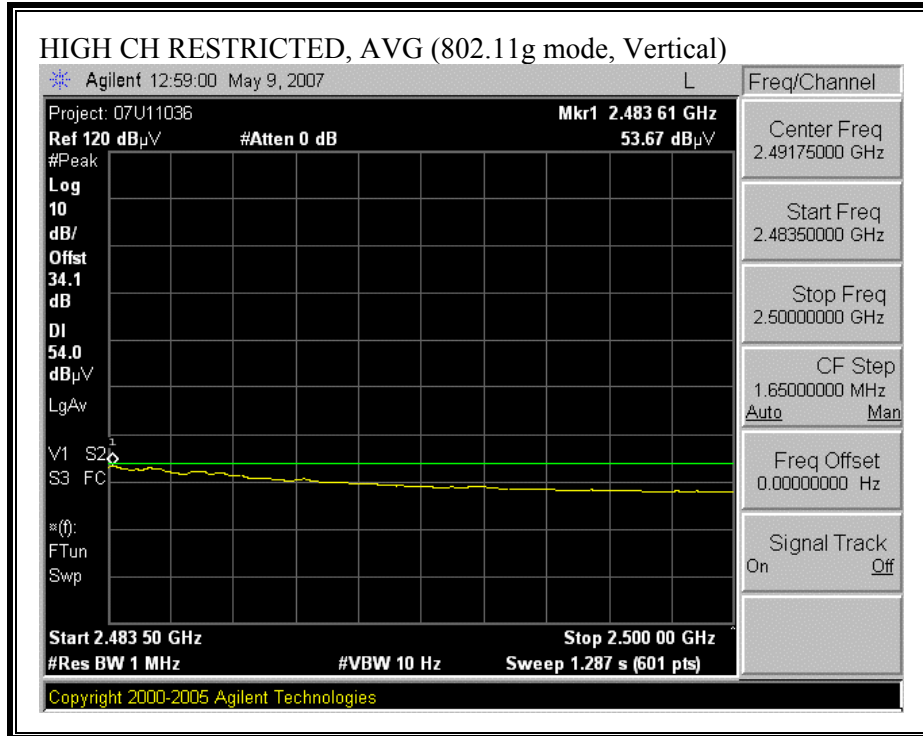

HARMONICS AND SPURIOUS EMISSIONS (g MODE)

05/09/07 High Frequency Measurement
 Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: William Zhuang
 Project #: 07U11036
 Company: Bountiful WiFi
 EUT Descrip.: 802.11 b/g Access Point with Dipole Antenna
 EUT M/N: BWRG500
 Test Target: FCC 1.247
 Mode Oper: Tx On, g Mode
 Test Equipment:

Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz	Limit
T73; S/N: 6717 @3m	T34 HP 8449B			FCC 15.209

Hi Frequency Cables

2 foot cable	3 foot cable	12 foot cable	HPF	Reject Filter	Peak Measurements RBW=VBW=1MHz
		Gordon 203134001	HPF_4.0GHz		Average Measurements RBW=1MHz; VBW=10Hz


f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltn dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
g Mode, Low Ch. 2412 MHz, Art=18.5dBm															
4.824	3.0	37.0	25.3	33.3	6.9	-34.8	0.0	0.6	43.0	31.3	74	54	-31.0	-22.7	V
7.236	3.0	45.1	31.5	34.9	8.4	-34.1	0.0	0.6	54.9	41.3	74	54	-19.1	-12.7	V
9.648	3.0	35.1	22.9	36.7	9.7	-33.6	0.0	0.8	48.8	36.6	74	54	-25.2	-17.4	V
4.824	3.0	39.8	26.5	33.3	6.9	-34.8	0.0	0.6	45.8	32.5	74	54	-28.2	-21.5	H
7.237	3.0	43.5	30.3	34.9	8.4	-34.1	0.0	0.6	53.3	40.2	74	54	-20.7	-13.8	H
9.644	3.0	37.6	24.9	36.7	9.7	-33.6	0.0	0.8	51.2	38.5	74	54	-22.8	-15.5	H
g Mode, Mid Ch. 2442 MHz, Art=21.5dBm															
4.880	3.0	49.9	33.5	33.4	6.9	-34.8	0.0	0.6	55.9	39.6	74	54	-18.1	-14.4	V
7.321	3.0	57.4	43.9	35.0	8.4	-34.1	0.0	0.6	67.4	53.8	74	54	-6.6	-0.2	V
9.769	3.0	41.8	31.8	36.8	9.8	-33.3	0.0	0.8	56.0	45.9	74	54	-18.0	-8.1	Y
4.893	3.0	43.3	30.8	33.4	6.9	-34.8	0.0	0.6	49.4	36.9	74	54	-24.6	-17.1	H
7.317	3.0	50.9	37.2	35.0	8.4	-34.1	0.0	0.6	60.8	47.2	74	54	-13.2	-6.8	H
9.774	3.0	43.2	30.0	36.8	9.8	-33.2	0.0	0.8	57.4	44.2	74	54	-16.6	-9.8	H
g Mode, High Ch. 2462 MHz, Art=17.5dBm															
4.924	3.0	44.1	30.7	33.4	7.0	-34.8	0.0	0.6	50.3	36.9	74	54	-23.7	-17.1	V
7.383	3.0	49.0	33.0	35.0	8.4	-34.1	0.0	0.6	59.0	43.0	74	54	-15.0	-11.0	V
9.845	3.0	47.5	30.0	36.8	9.9	-33.1	0.0	0.8	62.0	44.4	74	54	-12.0	-9.6	V
4.941	3.0	40.8	27.0	33.4	7.0	-34.8	0.0	0.6	47.0	33.2	74	54	-27.0	-20.8	H
7.381	3.0	44.1	31.2	35.0	8.4	-34.1	0.0	0.6	54.2	41.2	74	54	-19.8	-12.8	H
9.847	3.0	40.1	25.9	36.8	9.9	-33.1	0.0	0.8	54.6	40.4	74	54	-19.4	-13.6	H

Rev. 5.1.6

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

7.2.3. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

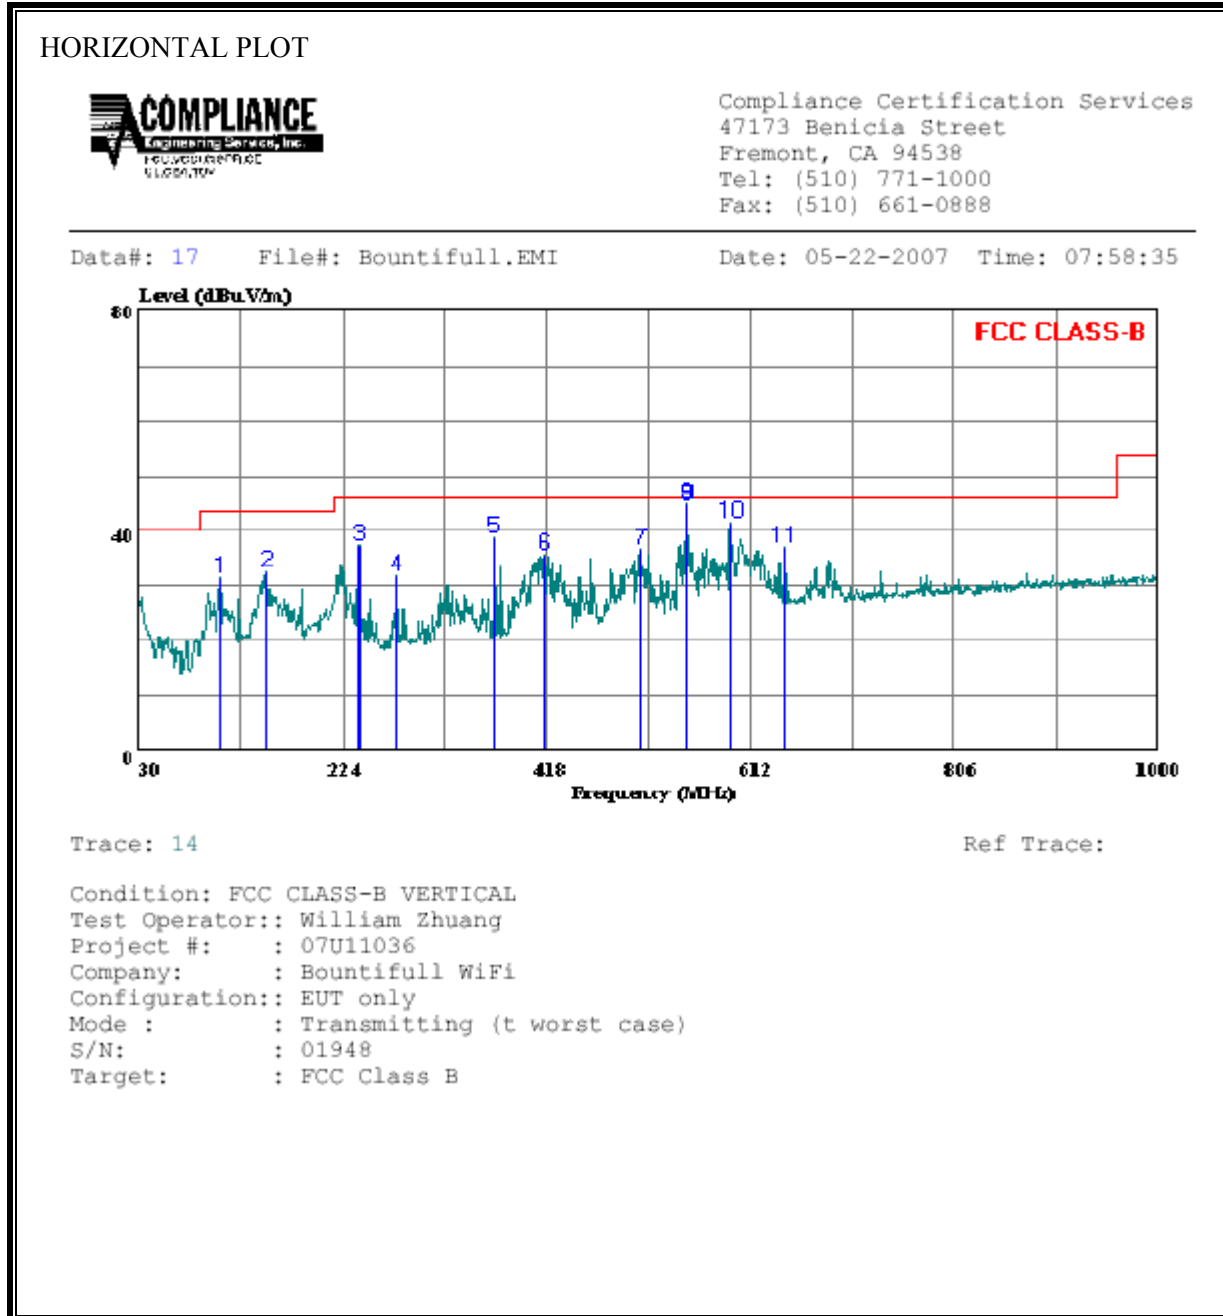


HORIZONTAL DATA

Page: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	106.630	47.23	-15.77	31.46	43.50	-12.04	Peak
2	151.250	46.69	-13.97	32.72	43.50	-10.78	Peak
3	239.520	51.80	-14.53	37.27	46.00	-8.73	Peak
4	275.410	45.05	-13.25	31.80	46.00	-14.20	Peak
5	367.560	49.39	-10.62	38.77	46.00	-7.23	Peak
6	415.090	45.10	-9.45	35.65	46.00	-10.35	Peak
7	507.240	44.01	-7.20	36.80	46.00	-9.20	Peak
8	551.860	50.89	-6.33	44.56	46.00	-1.44	QP
9	551.860	51.42	-6.33	45.09	46.00	-0.91	Peak
10	592.600	47.00	-5.57	41.43	46.00	-4.57	Peak
11	644.010	41.70	-4.52	37.18	46.00	-8.82	Peak

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

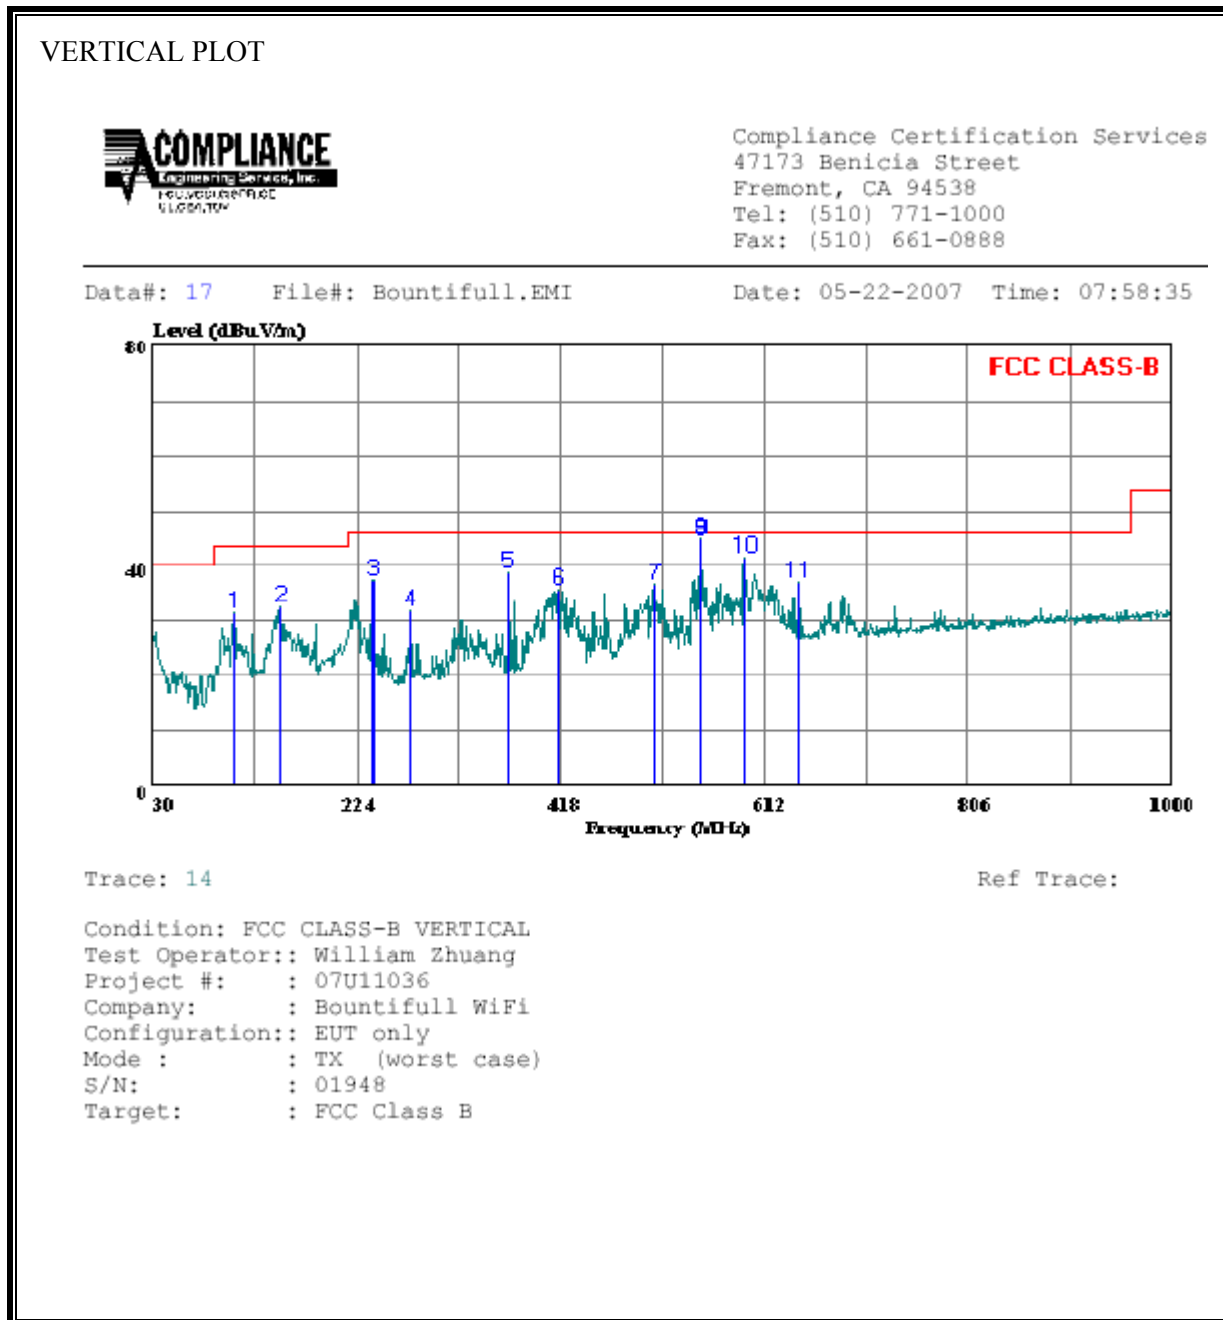

VERTICAL DATA

Page: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	106.630	47.23	-15.77	31.46	43.50	-12.04	Peak
2	151.250	46.69	-13.97	32.72	43.50	-10.78	Peak
3	239.520	51.80	-14.53	37.27	46.00	-8.73	Peak
4	275.410	45.05	-13.25	31.80	46.00	-14.20	Peak
5	367.560	49.39	-10.62	38.77	46.00	-7.23	Peak
6	415.090	45.10	-9.45	35.65	46.00	-10.35	Peak
7	507.240	44.01	-7.20	36.80	46.00	-9.20	Peak
8	551.860	50.89	-6.33	44.56	46.00	-1.44	QP
9	551.860	51.42	-6.33	45.09	46.00	-0.91	Peak
10	592.600	47.00	-5.57	41.43	46.00	-4.57	Peak
11	644.010	41.70	-4.52	37.18	46.00	-8.82	Peak

7.3. POWERLINE CONDUCTED EMISSIONS

LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.


RESULTS

No non-compliance noted:


6 WORST EMISSIONS

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Closs	Limit		Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.57	49.94		38.29	0.00	56.00	46.00	-56.00	-7.71	L1
0.72	43.30		33.42	0.00	56.00	46.00	-56.00	-12.58	L1
0.77	43.17		31.18	0.00	56.00	46.00	-56.00	-14.82	L1
0.57	49.08		38.35	0.00	56.00	46.00	-56.00	-7.65	L2
0.72	42.67		31.95	0.00	56.00	46.00	-56.00	-14.05	L2
0.77	42.69		31.03	0.00	56.00	46.00	-56.00	-14.97	L2
6 Worst Data									

LINE 1 RESULTS

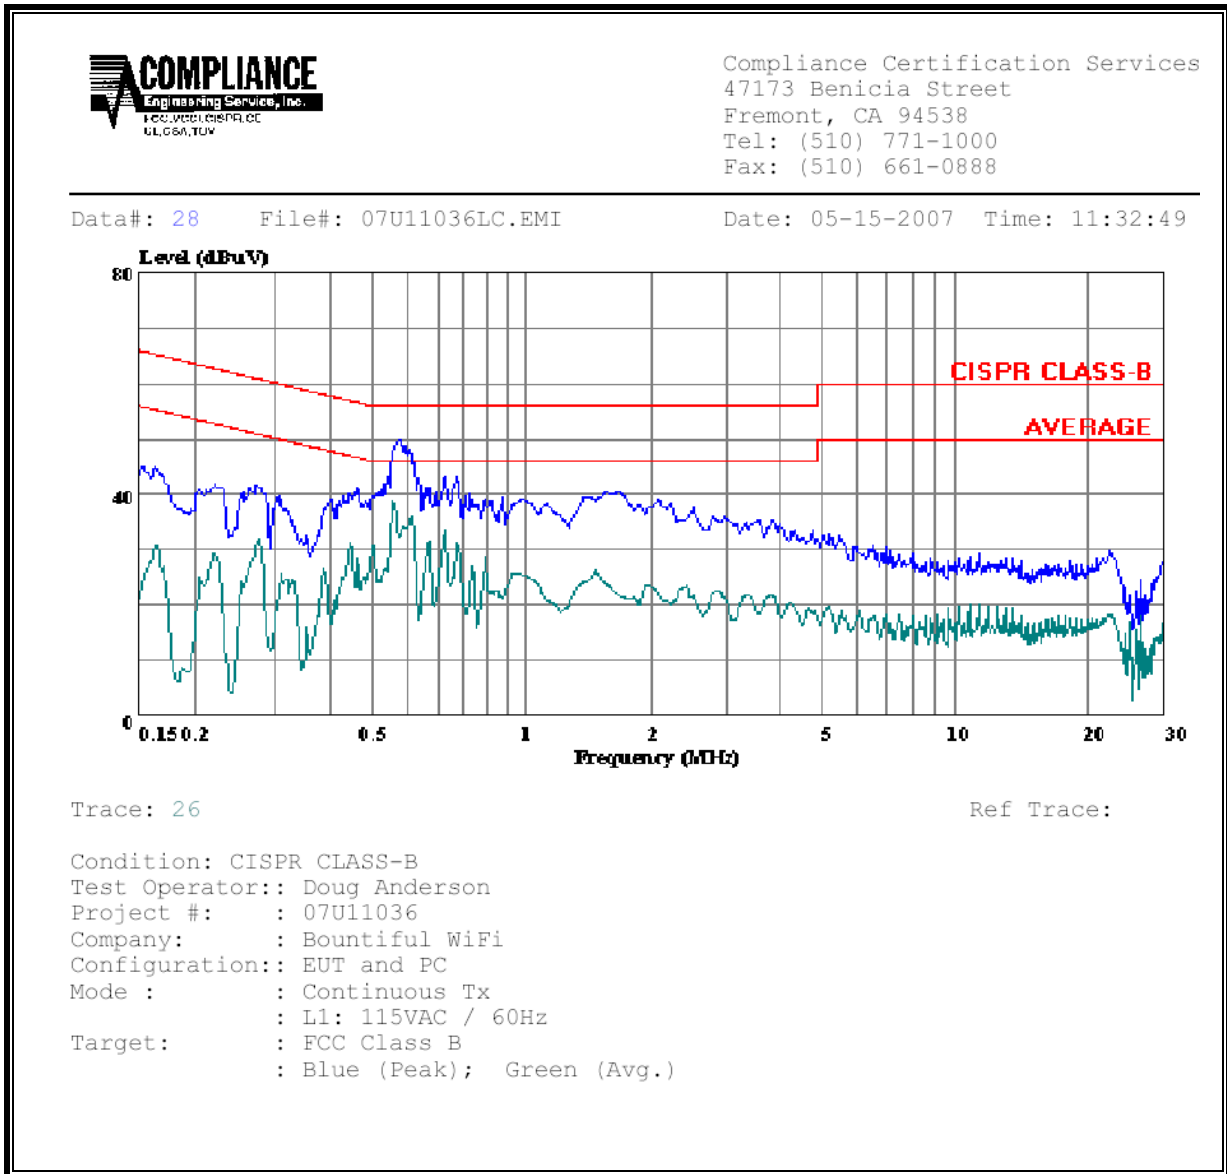


LINE 2 RESULTS

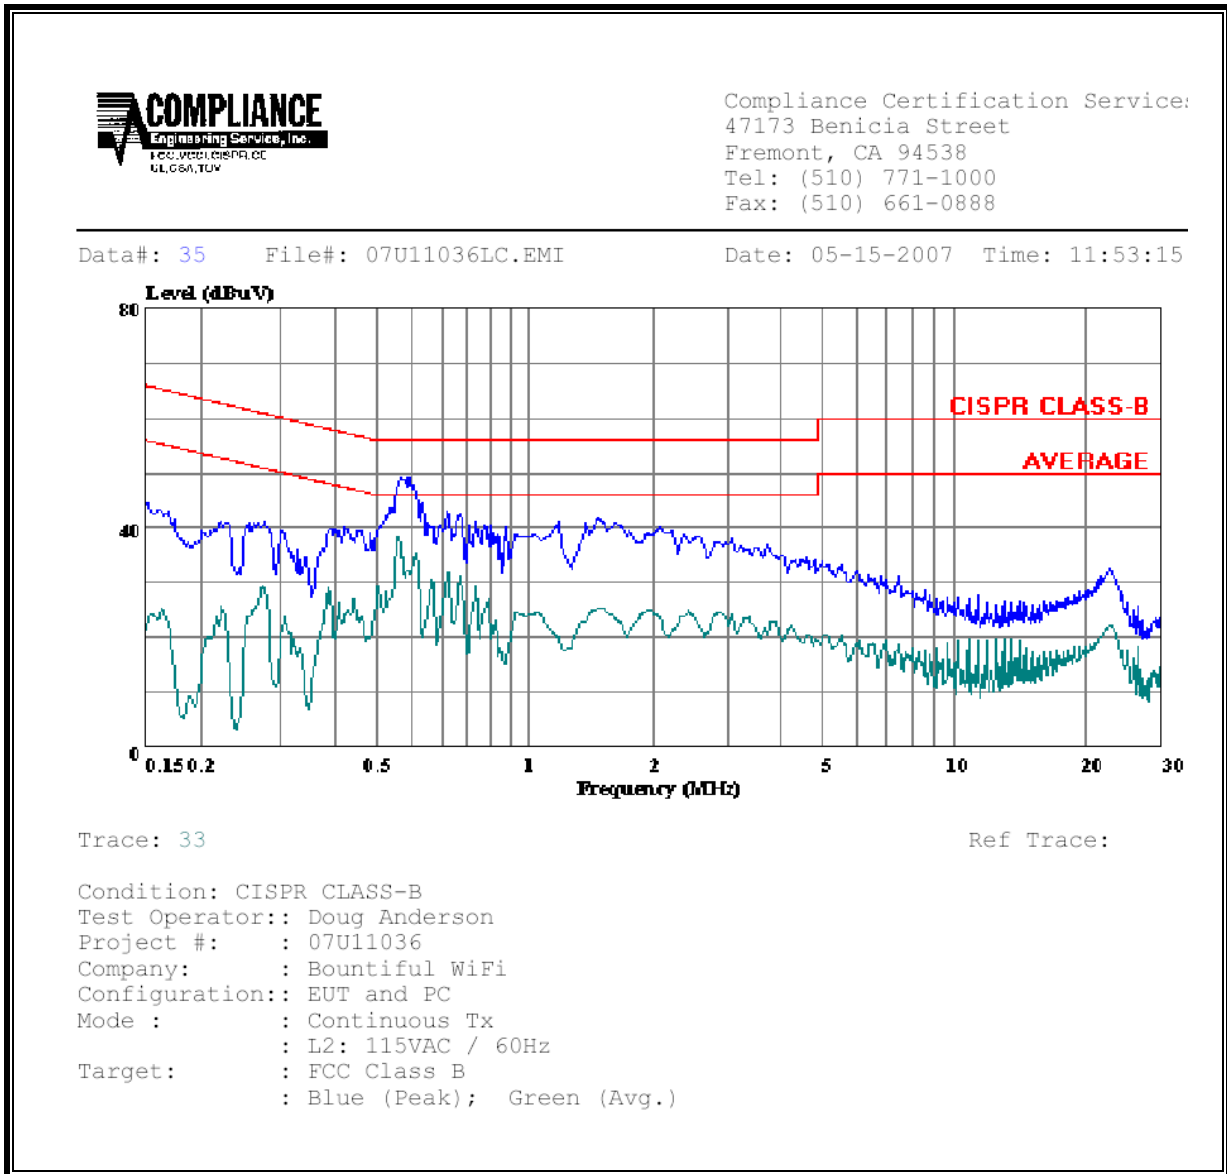

8. SETUP PHOTOS

ANTENNA PORT CONDUCTED RF MEASUREMENT SETUP

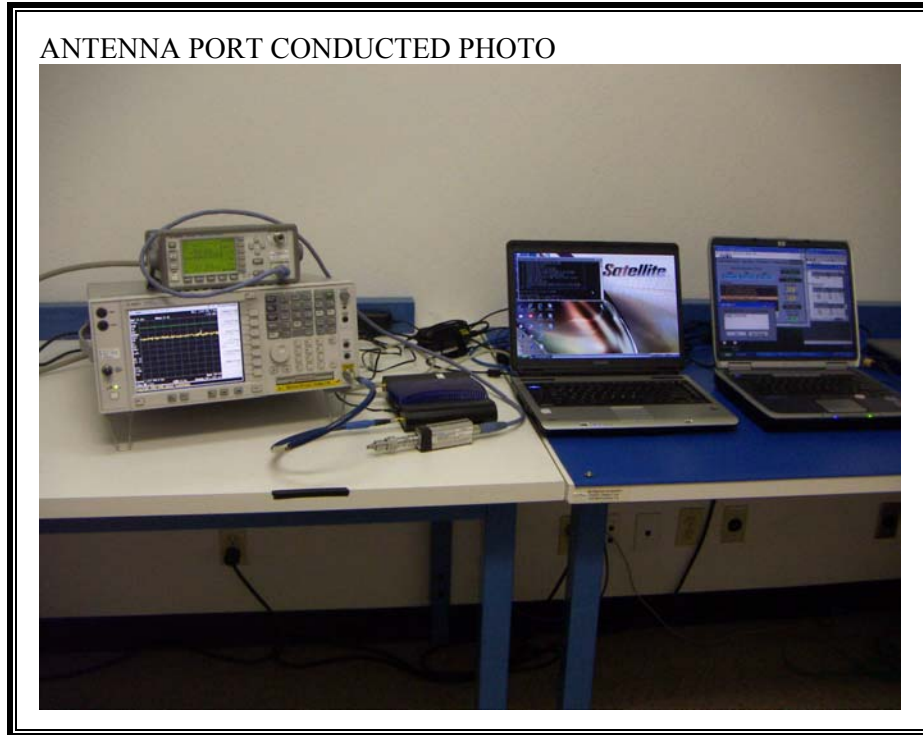


RADIATED RF MEASUREMENT SETUP





POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP



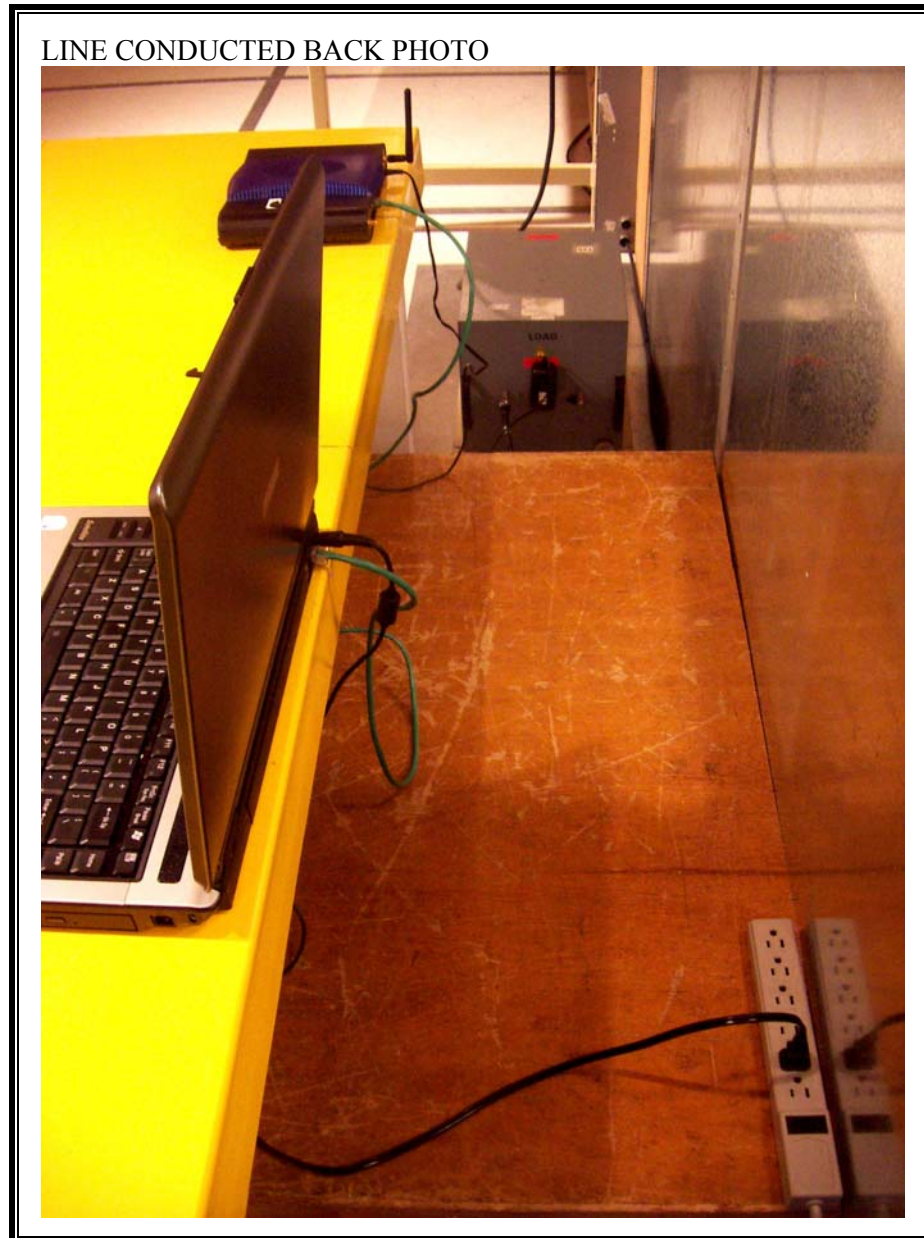

END OF REPORT