


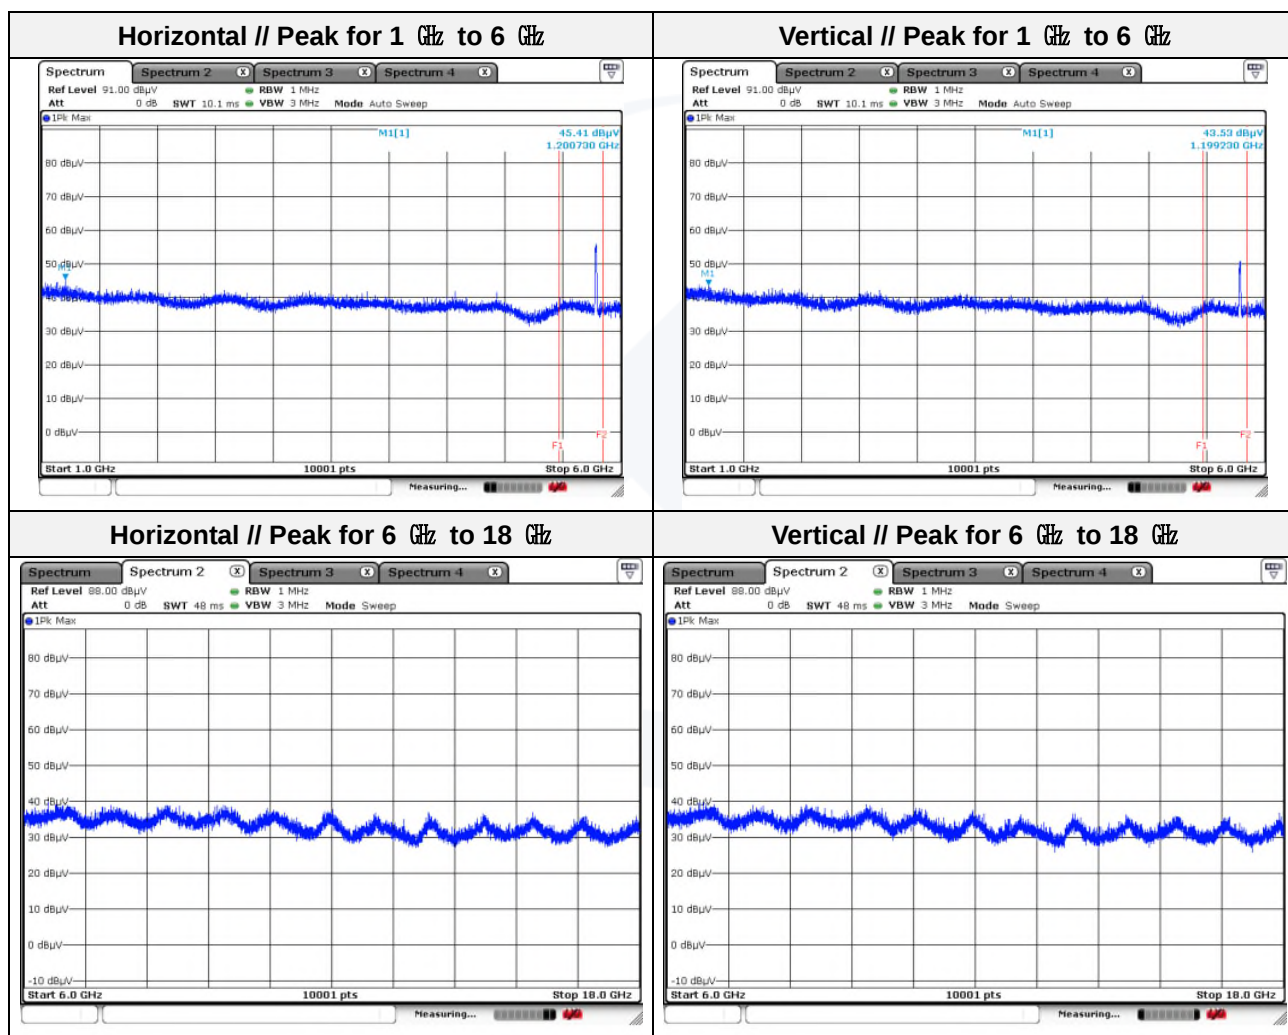

Mode: 802.11a (6 Mbps)
Band: UNII-3
Distance of measurement: 3 meter
Channel: 157

- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 199.23	43.53	Peak	V	-7.17	-	36.36	74.00	37.64
1 200.73	45.41	Peak	H	-7.17	-	38.24	74.00	35.76

**Note.**

1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.




Mode: 802.11a (6 Mbps)
Band: UNII-3
Distance of measurement: 3 meter
Channel: 165


- Spurious

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 017.75	44.66	Peak	V	-8.11	-	36.55	74.00	37.45
1 199.23	44.41	Peak	H	-7.17	-	37.24	74.00	36.76

- Band edge

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
5 850.00	57.72	Peak	V	7.35	-	65.07	122.23	57.16
5 850.19	60.28	Peak	H	7.35	-	67.63	121.80	54.17
5 850.65	57.39	Peak	V	7.35	-	64.74	120.75	56.01
5 851.23	60.56	Peak	H	7.36	-	67.92	119.43	51.51

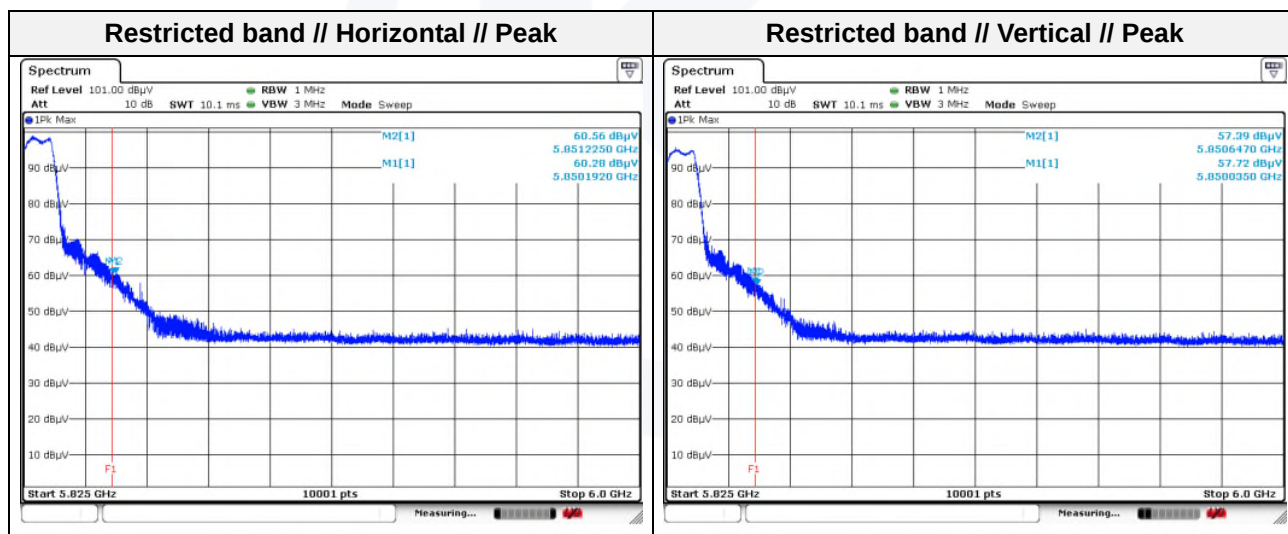

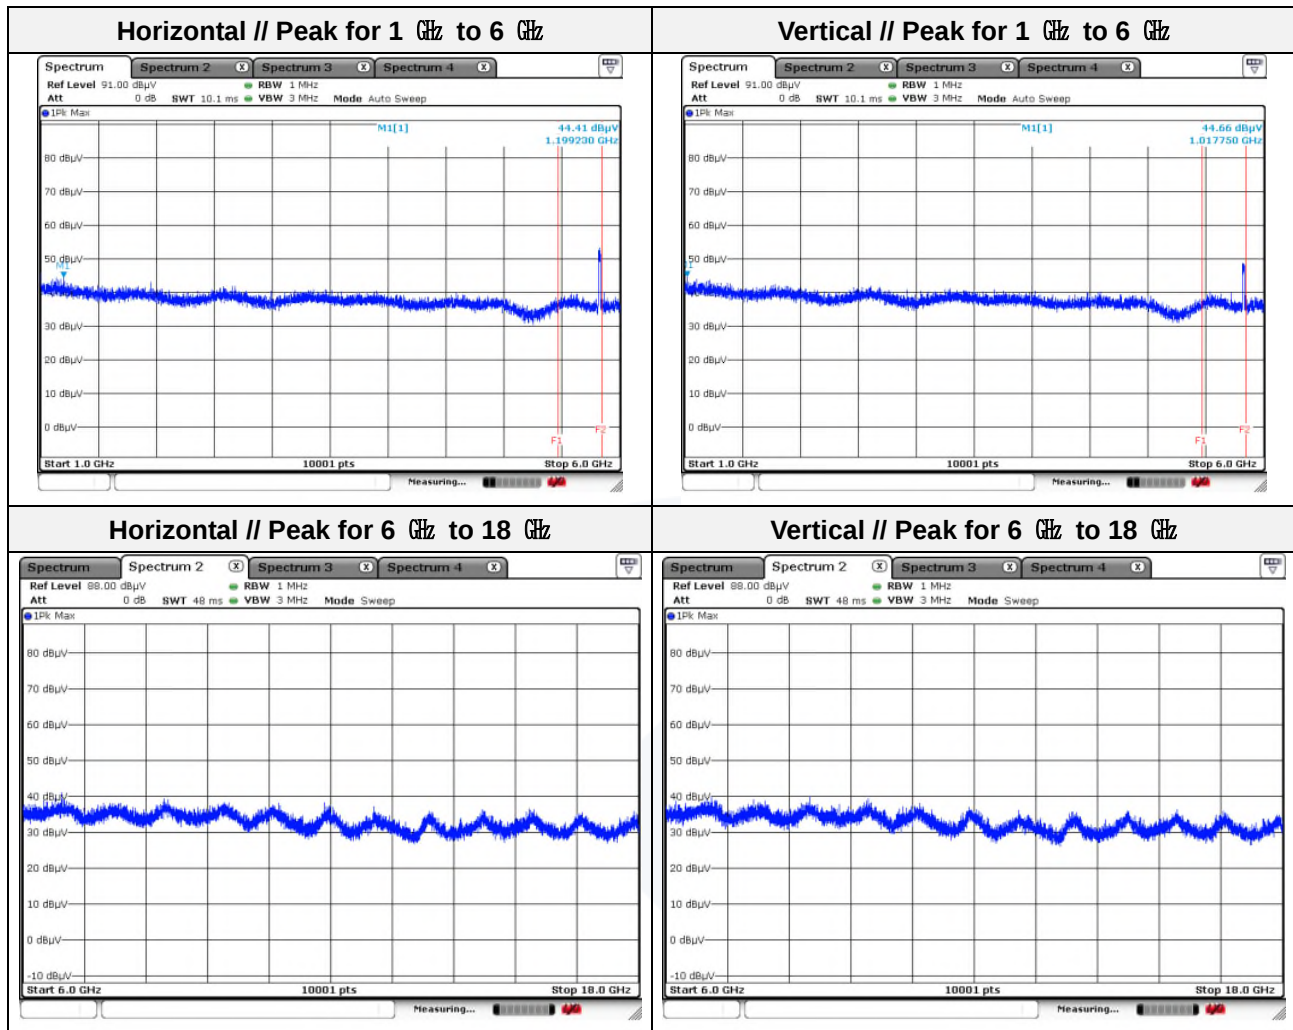

Note.

1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.




Mode: 802.11n_HT20 (MCS0)
Band: UNII-3
Distance of measurement: 3 meter
Channel: 149


- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 086.74	44.25	Peak	V	-7.75	-	36.50	74.00	37.50
1 089.24	44.90	Peak	H	-7.74	-	37.16	74.00	36.84

- Band edge

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
5 721.32	60.45	Peak	V	6.97	-	67.42	113.84	46.42
5 722.22	63.85	Peak	H	6.98	-	70.83	115.89	45.06
5 723.73	64.18	Peak	H	6.98	-	71.16	119.33	48.17
5 724.22	62.28	Peak	V	6.98	-	69.26	120.45	51.19

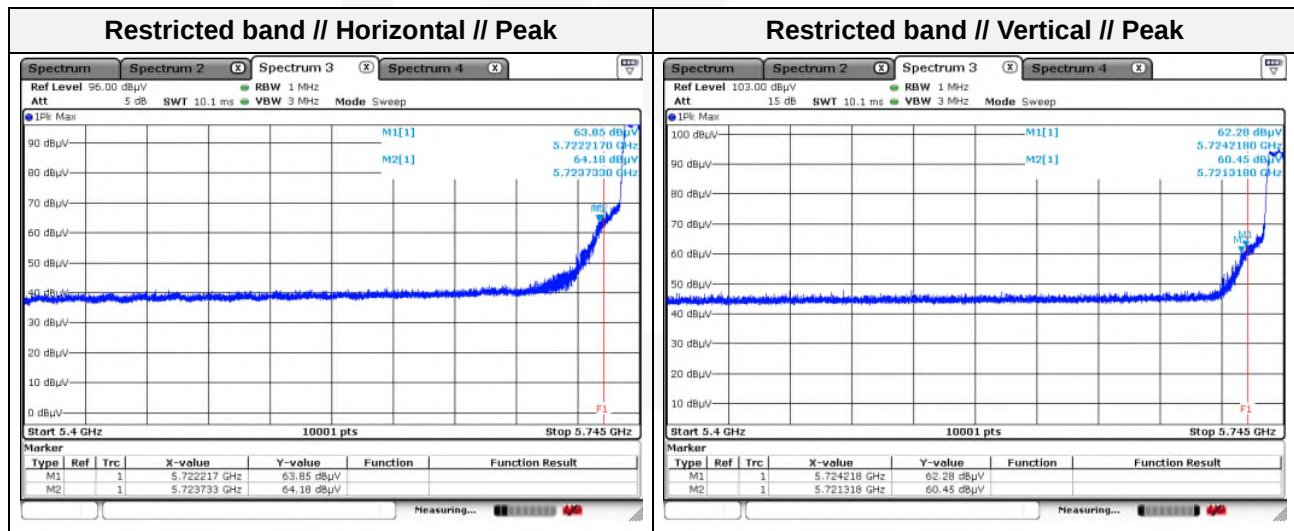

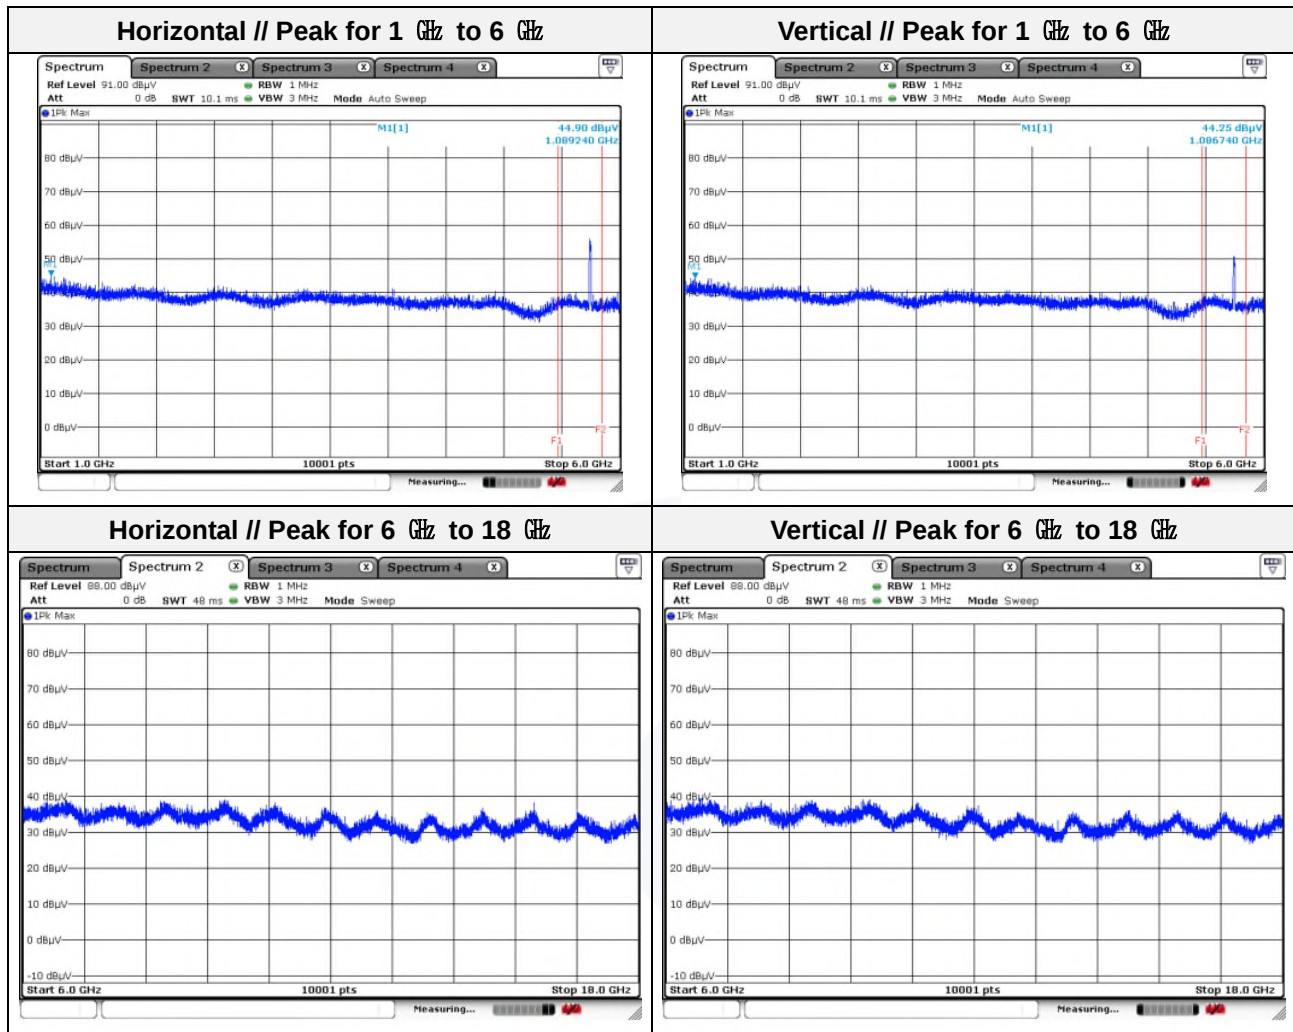

Note.


1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.



Mode: 802.11n_HT20 (MCS0)
Band: UNII-3
Distance of measurement: 3 meter
Channel: 157

- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 200.73	45.15	Peak	H	-7.17	-	37.98	74.00	36.02
1 256.22	43.51	Peak	V	-6.89	-	36.62	68.20	31.58

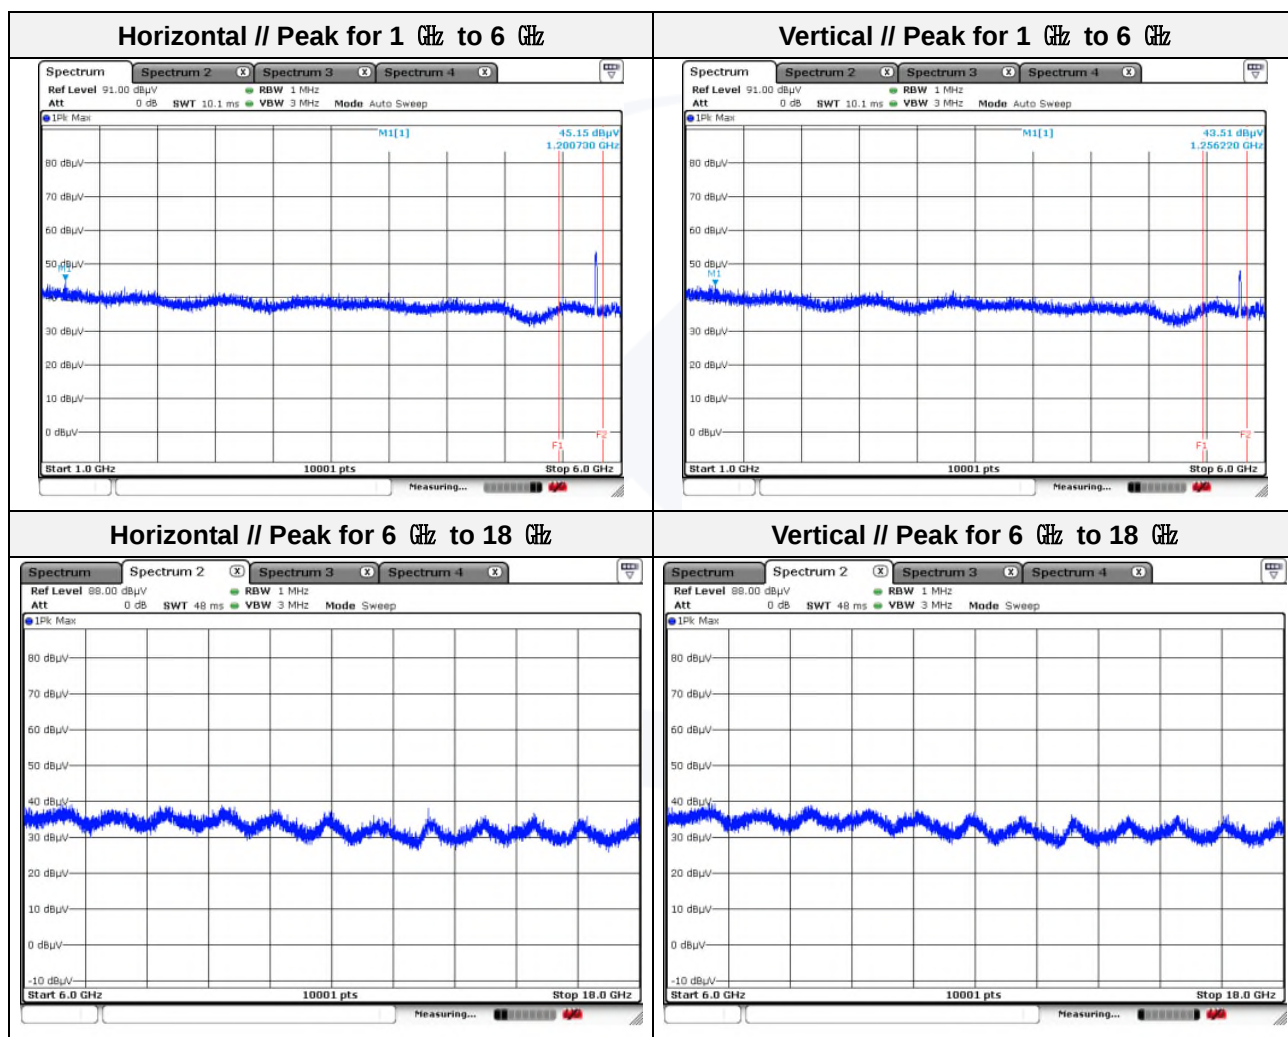

Note.

1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.




Mode: 802.11n_HT20 (MCS0)
Band: UNII-3
Distance of measurement: 3 meter
Channel: 165


- Spurious

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 059.24	44.73	Peak	V	-7.90	-	36.83	74.00	37.17
1 104.74	44.14	Peak	H	-7.66	-	36.48	74.00	37.52

- Band edge

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
5 851.59	60.47	Peak	H	7.36	-	67.83	118.60	50.77
5 851.79	57.24	Peak	V	7.36	-	64.60	118.15	53.55
5 852.27	60.55	Peak	H	7.36	-	67.91	117.05	49.14
5 852.29	56.94	Peak	V	7.36	-	64.30	117.01	52.71

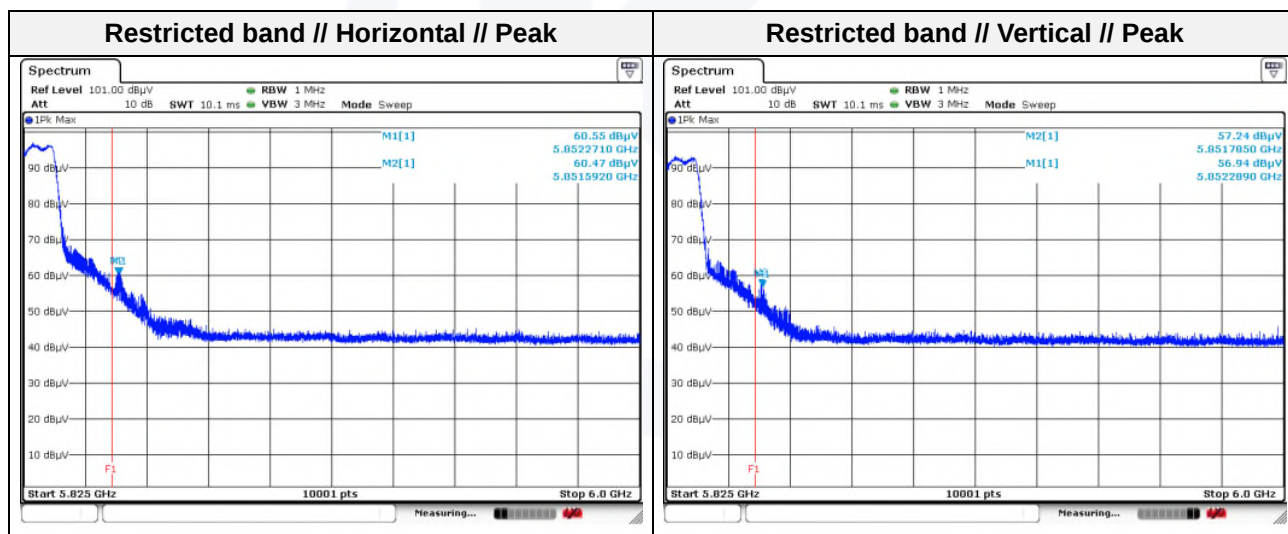

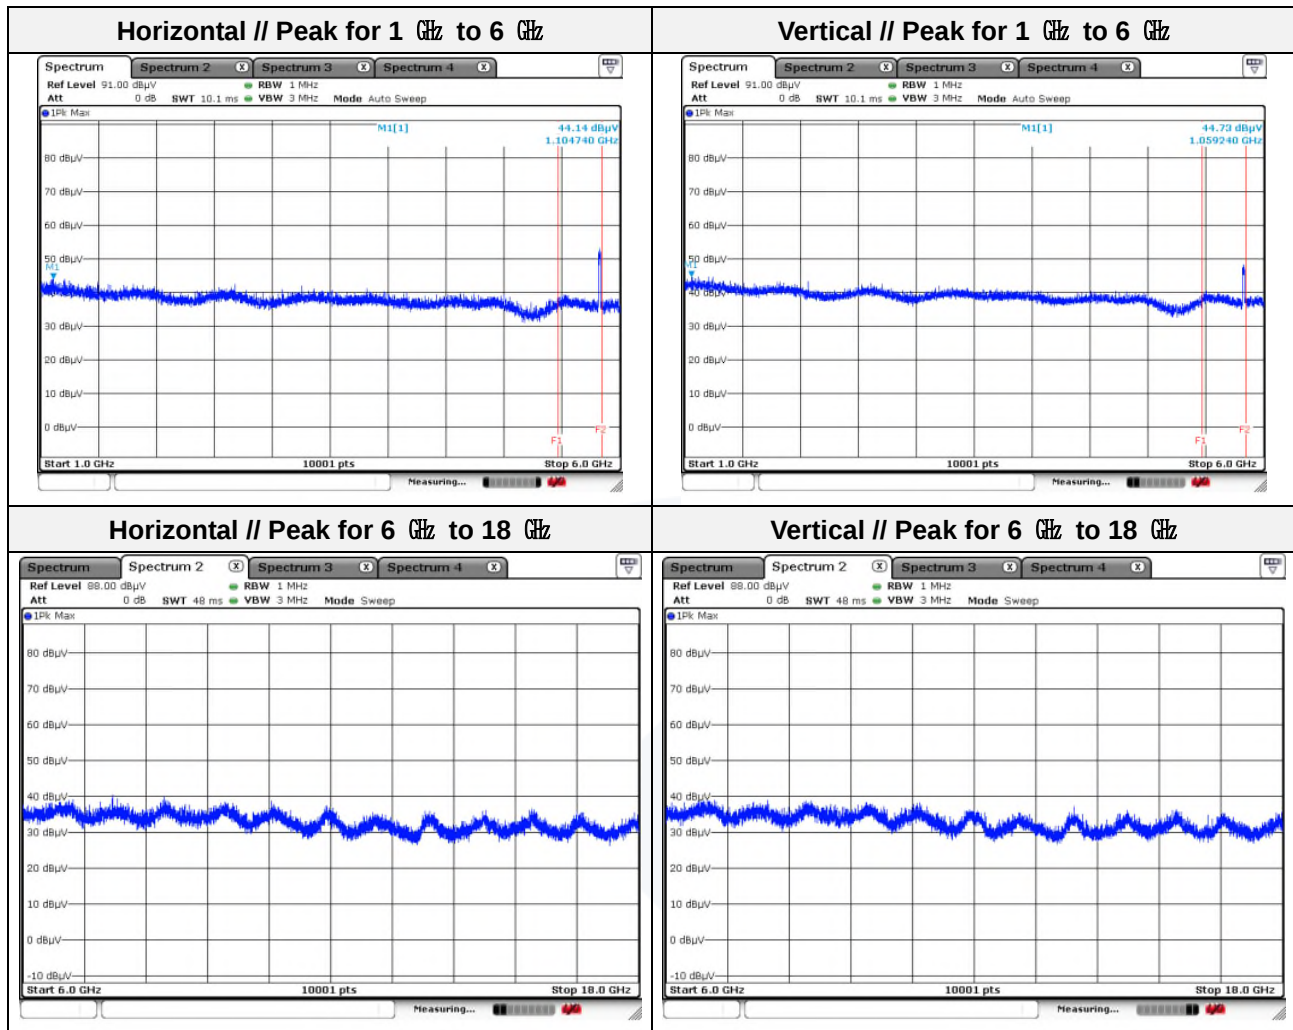

Note.

1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.




Mode: 802.11ac_VHT20 (MCS0)
Band: UNII-3
Distance of measurement: 3 meter
Channel: 149


- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 087.74	44.03	Peak	V	-7.75	-	36.28	74.00	37.72
1 200.73	44.80	Peak	H	-7.17	-	37.63	74.00	36.37

- Band edge

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
5 721.87	59.78	Peak	V	6.97	-	66.75	115.09	48.34
5 723.18	64.55	Peak	H	6.98	-	71.53	118.08	46.55
5 723.39	65.13	Peak	H	6.98	-	72.11	118.56	46.45
5 723.94	62.17	Peak	V	6.98	-	69.15	119.81	50.66

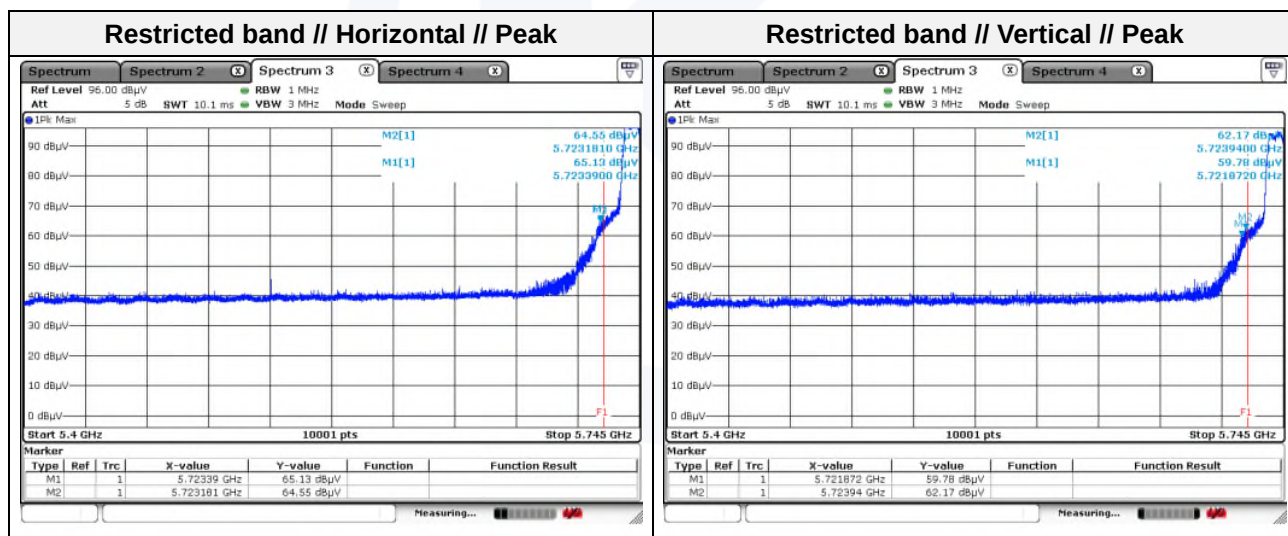

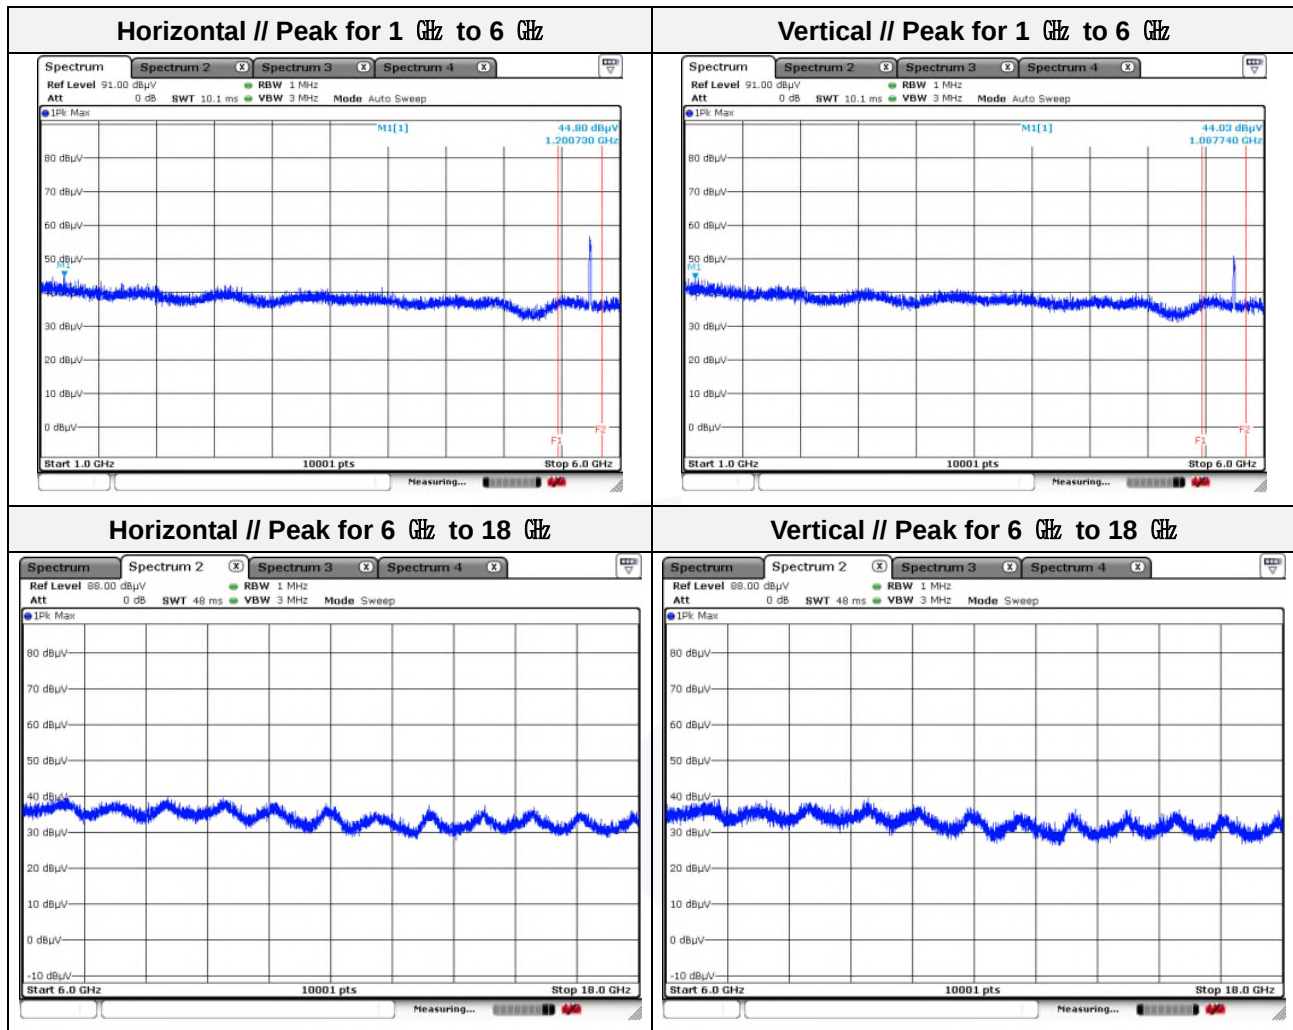

Note.


1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.



Mode: 802.11ac_VHT20 (MCS0)
Band: UNII-3
Distance of measurement: 3 meter
Channel: 157

- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 147.24	44.18	Peak	V	-7.44	-	36.74	74.00	37.26
1 199.73	44.92	Peak	H	-7.17	-	37.75	74.00	36.25

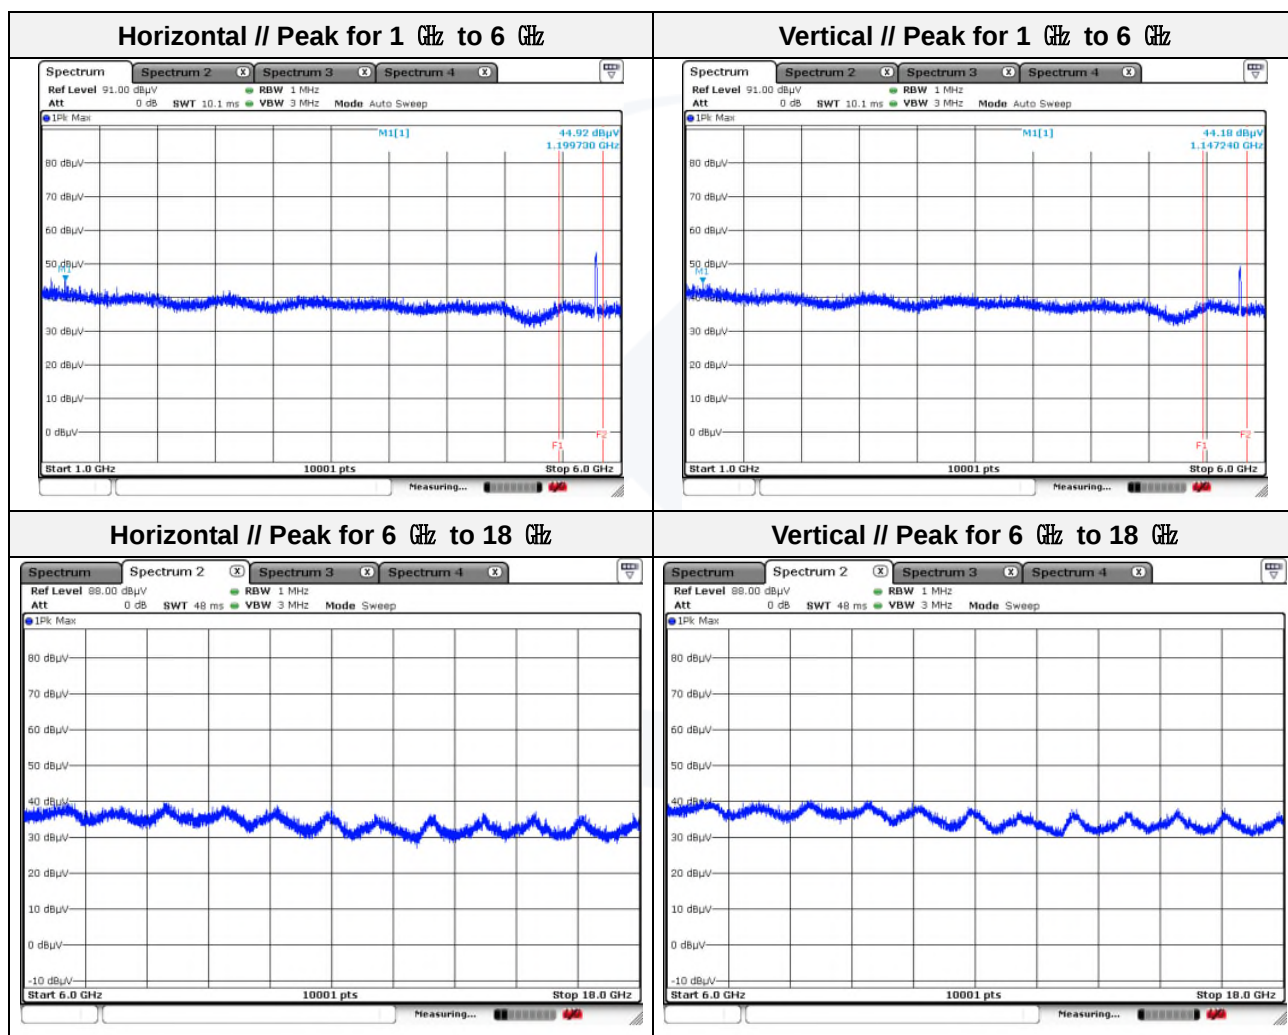

Note.

1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.




Mode: 802.11ac_VHT20 (MCS0)
Band: UNII-3
Distance of measurement: 3 meter
Channel: 165


- Spurious

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 076.74	44.41	Peak	V	-7.81	-	36.60	74.00	37.40
1 200.73	45.83	Peak	H	-7.17	-	38.66	74.00	35.34

- Band edge

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
5 851.15	58.99	Peak	H	7.36	-	66.35	119.61	53.26
5 851.62	57.34	Peak	V	7.36	-	64.70	118.54	53.84
5 852.24	57.36	Peak	V	7.36	-	64.72	117.12	52.40
5 852.43	59.99	Peak	H	7.36	-	67.35	116.69	49.34

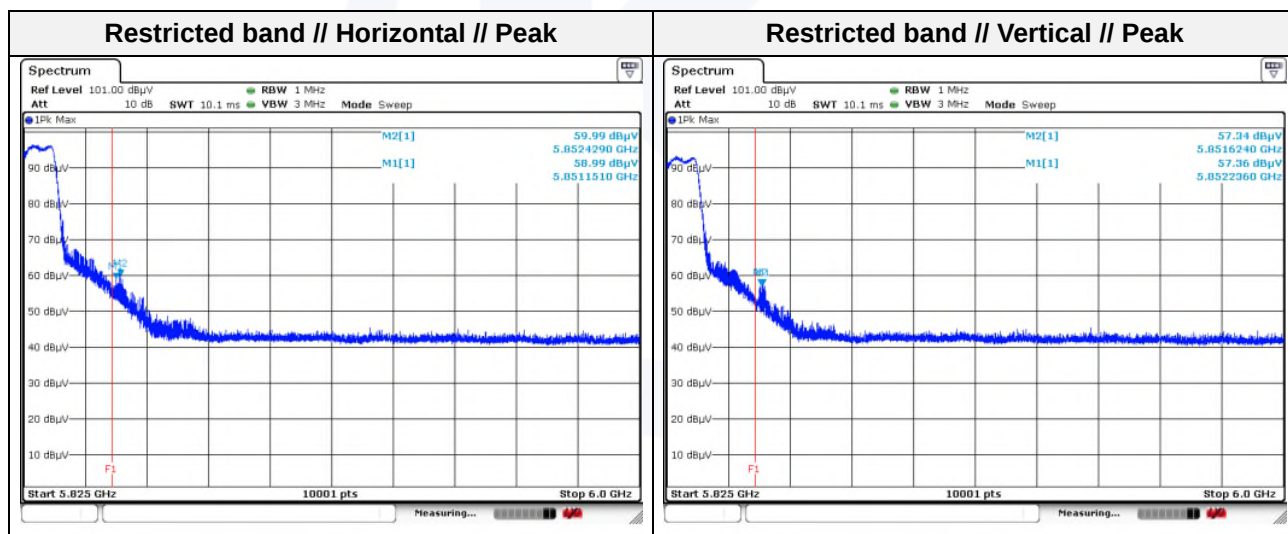

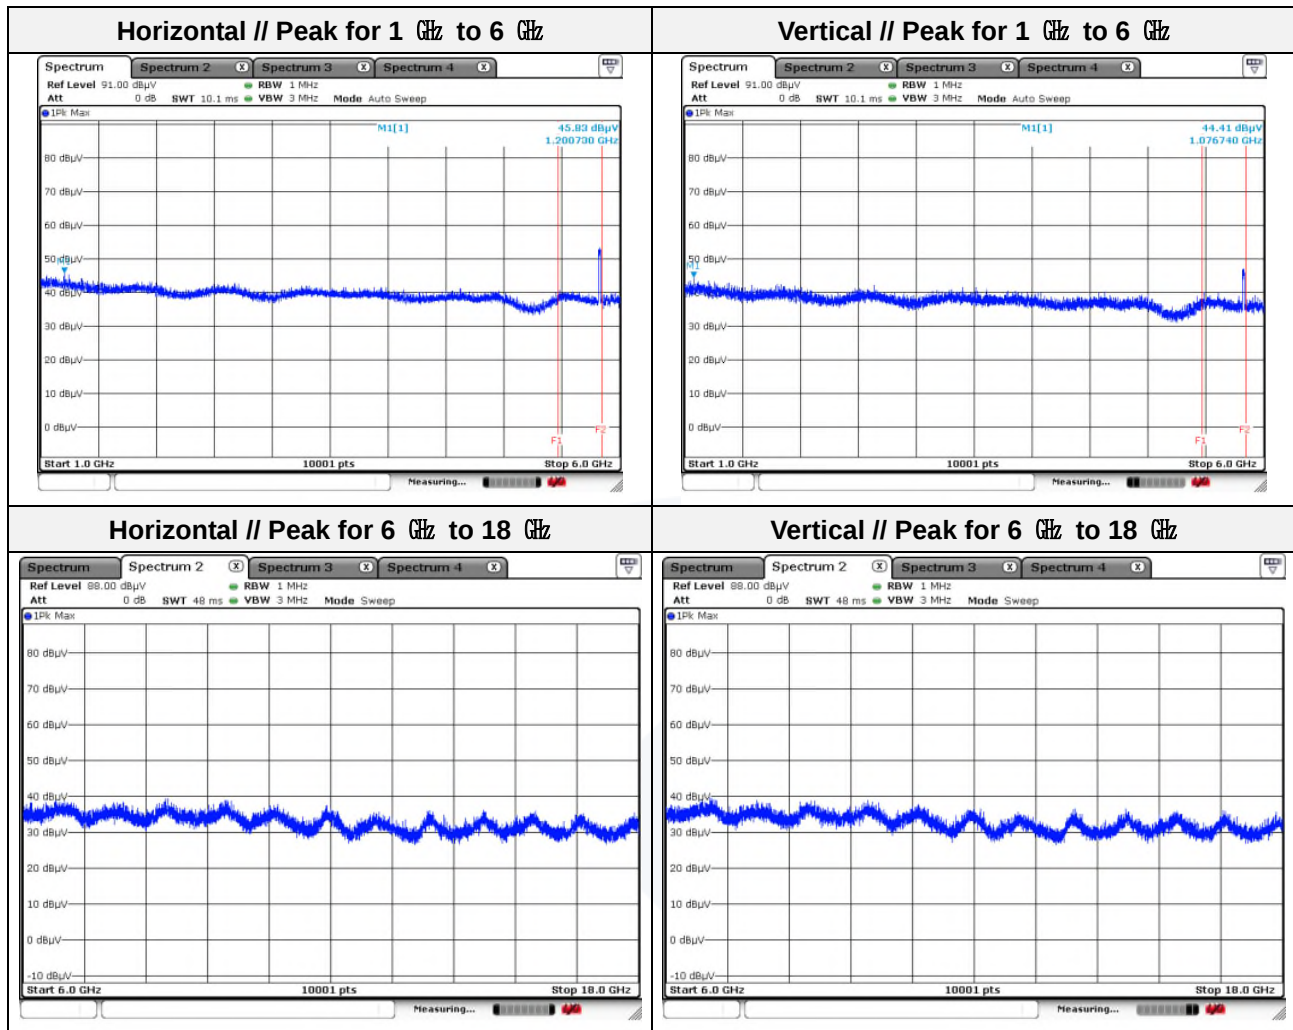

Note.

1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.




Mode: 802.11ax_HE20 (MCS0)
Band: UNII-3
Distance of measurement: 3 meter
Channel: 149


- Spurious

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 017.25	44.21	Peak	V	-8.11	-	36.10	74.00	37.90
1 200.73	44.99	Peak	H	-7.17	-	37.82	74.00	36.18

- Band edge

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
5 722.32	53.50	Peak	V	6.98	-	60.48	116.12	55.64
5 722.42	49.87	Peak	H	6.98	-	56.85	116.35	59.50
5 724.04	58.46	Peak	V	6.98	-	65.44	120.04	54.60
5 724.15	54.79	Peak	H	6.98	-	61.77	120.29	58.52

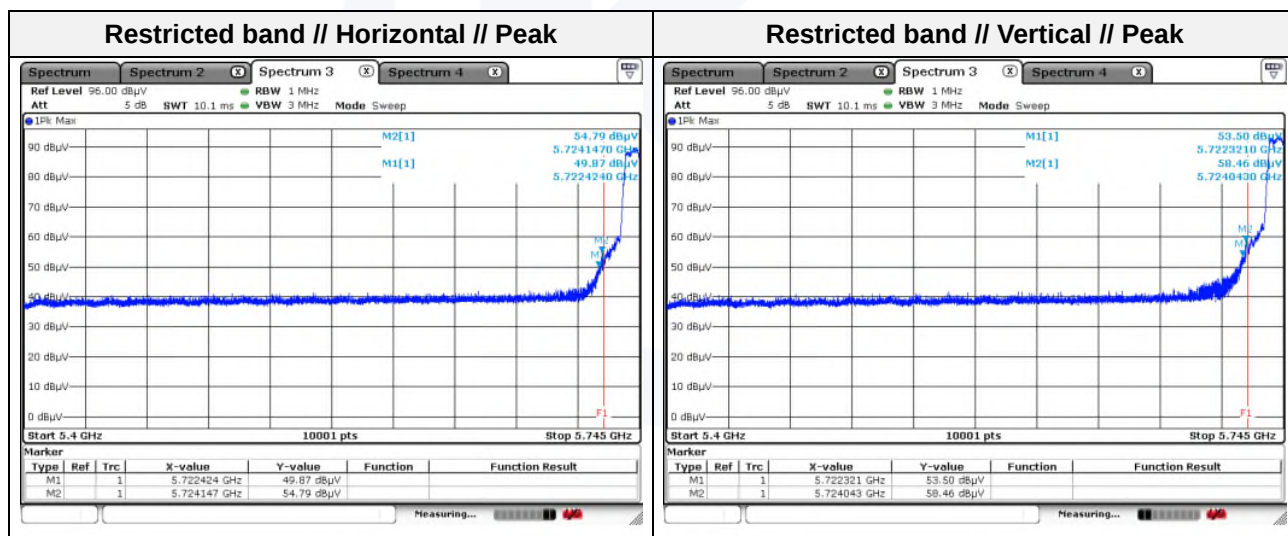

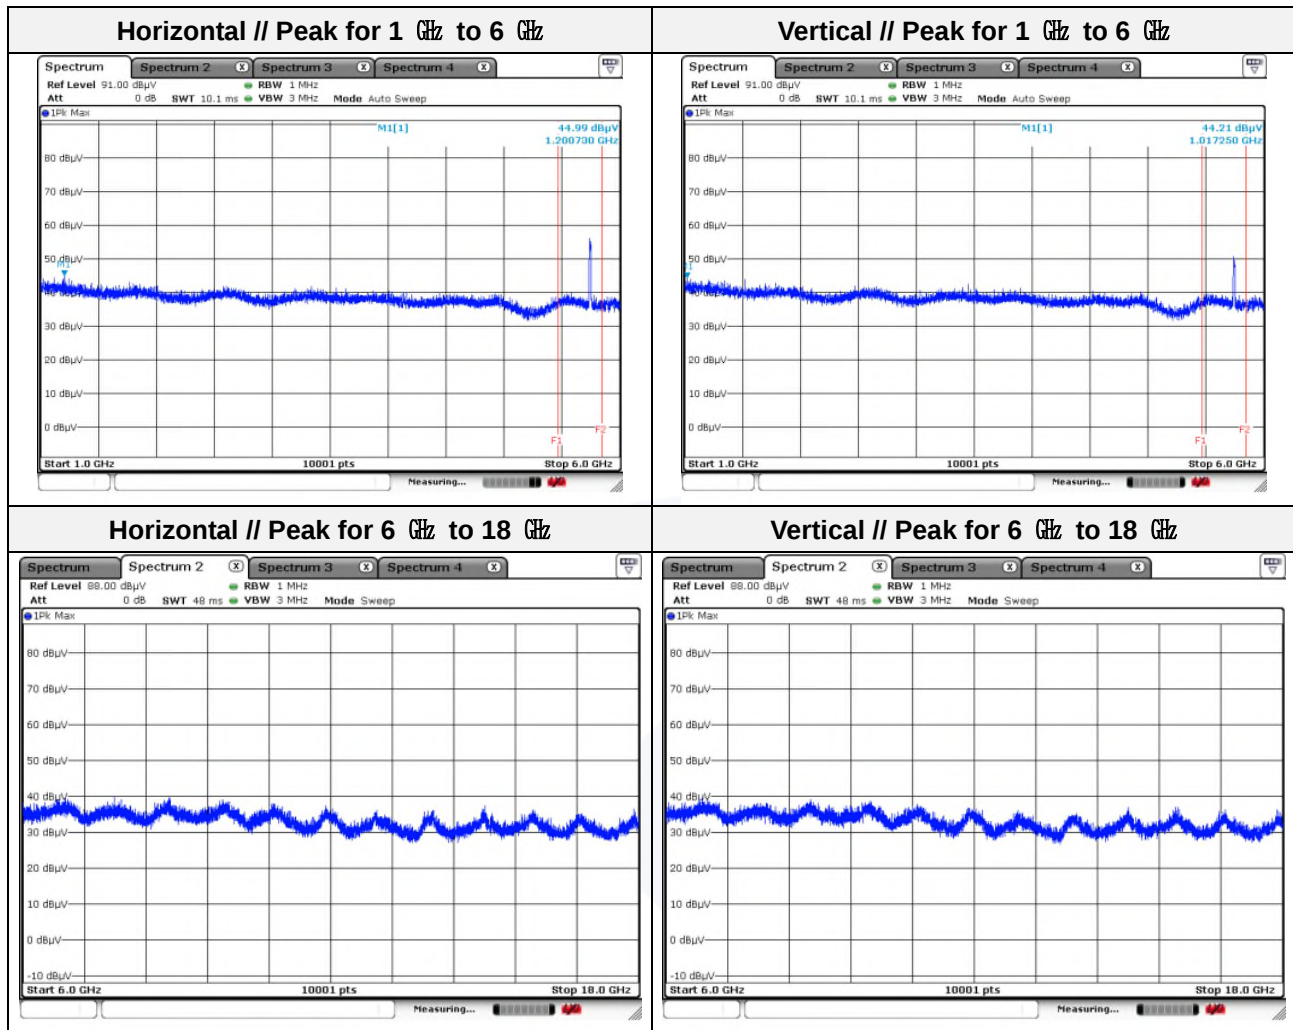

Note.


1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.



Mode: 802.11ax_HE20 (MCS0)
Band: UNII-3
Distance of measurement: 3 meter
Channel: 157

- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 072.74	43.98	Peak	V	-7.83	-	36.15	74.00	37.85
1 200.73	44.82	Peak	H	-7.17	-	37.65	74.00	36.35

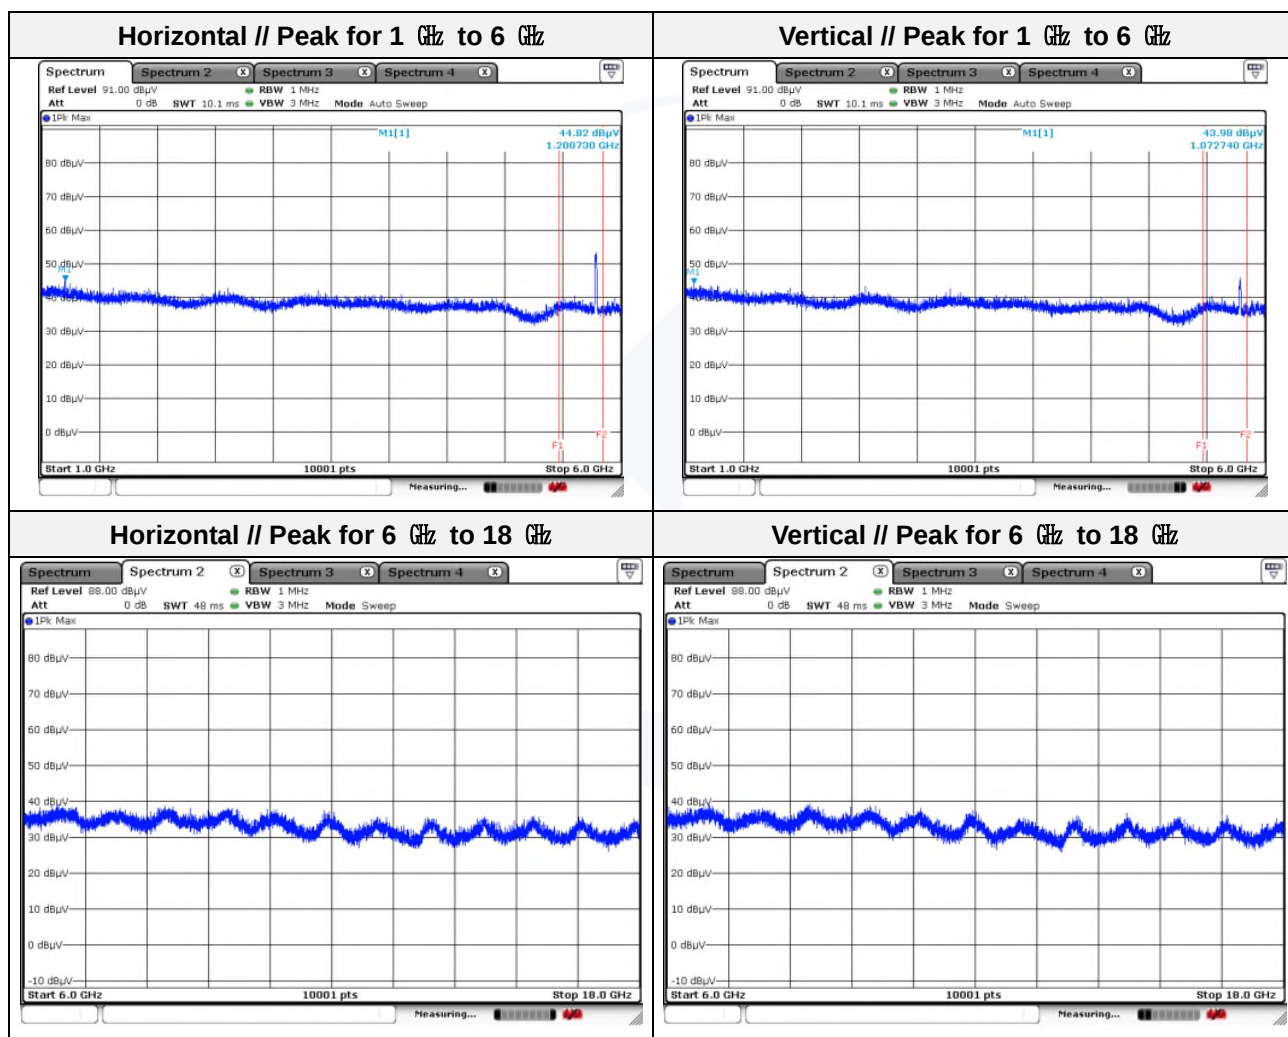**Note.**

1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.




Mode: 802.11ax_HE20 (MCS0)
Band: UNII-3
Distance of measurement: 3 meter
Channel: 165


- Spurious

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 029.75	44.69	Peak	H	-8.05	-	36.64	74.00	37.36
1 116.24	43.58	Peak	V	-7.60	-	35.98	74.00	38.02

- Band edge

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
5 850.59	50.21	Peak	V	7.35	-	57.56	120.88	63.32
5 850.71	53.21	Peak	H	7.35	-	60.56	120.61	60.05
5 852.69	49.86	Peak	V	7.36	-	57.22	116.10	58.88
5 853.62	52.56	Peak	H	7.36	-	59.92	113.98	54.06

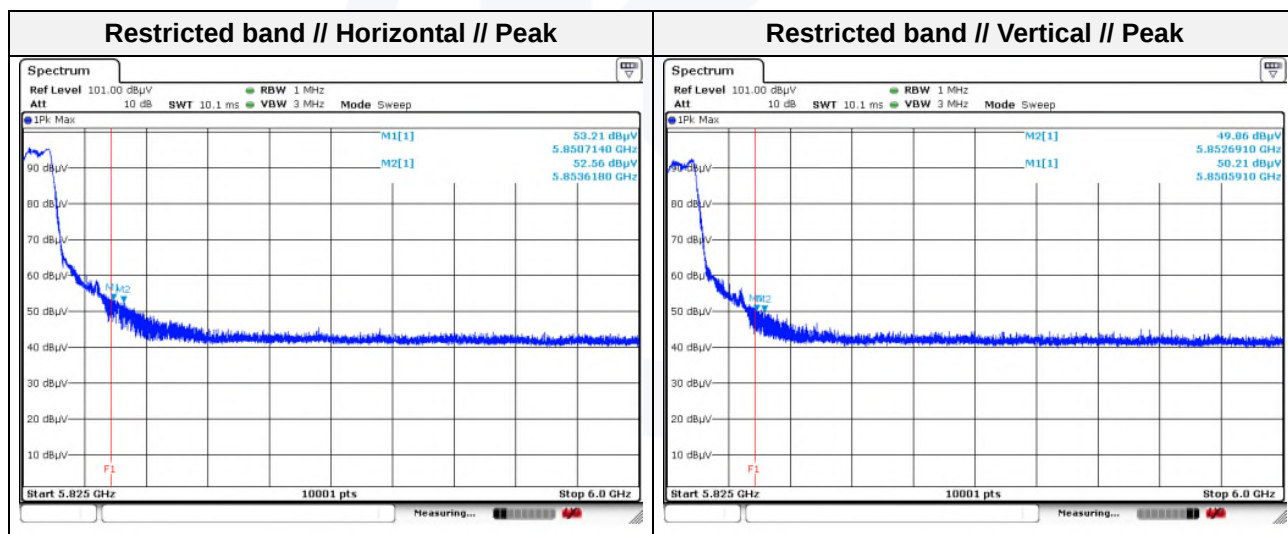

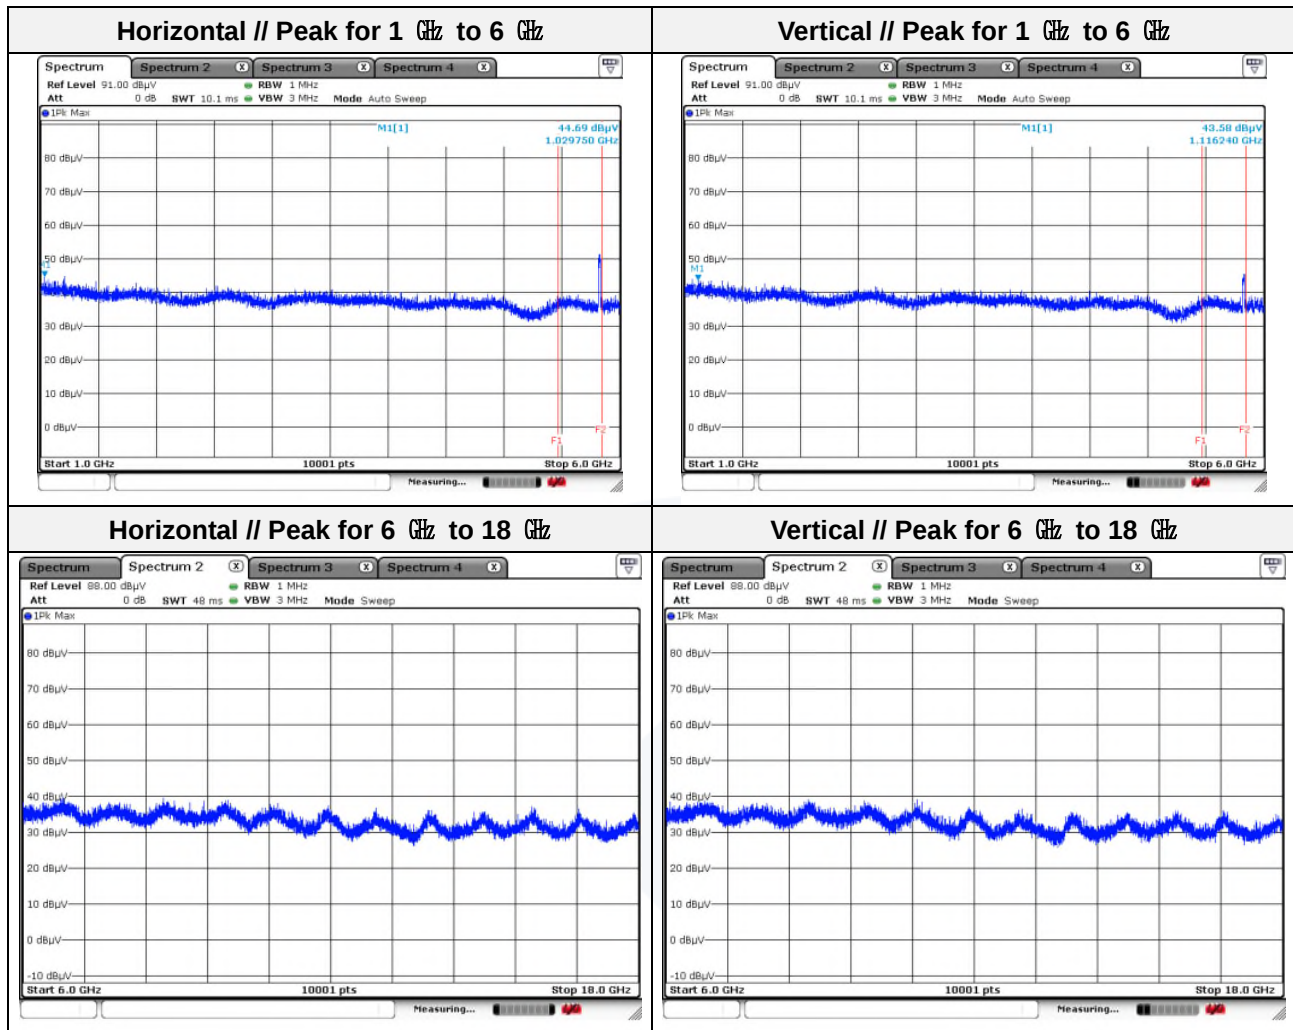

Note.

1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.




Mode:	802.11n_HT40 (MCS0)
Band:	UNII-3
Distance of measurement:	3 meter
Channel:	151


- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 200.23	44.61	Peak	H	-7.17	-	37.44	74.00	36.56
1 200.23	43.65	Peak	V	-7.17	-	36.48	74.00	37.52

- Band edge

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
5 706.14	55.02	Peak	H	6.94	-	61.96	106.95	44.99
5 710.01	59.80	Peak	V	6.95	-	66.75	108.03	41.28
5 719.63	60.91	Peak	V	6.97	-	67.88	110.73	42.85
5 721.58	58.94	Peak	H	6.97	-	65.91	114.43	48.52

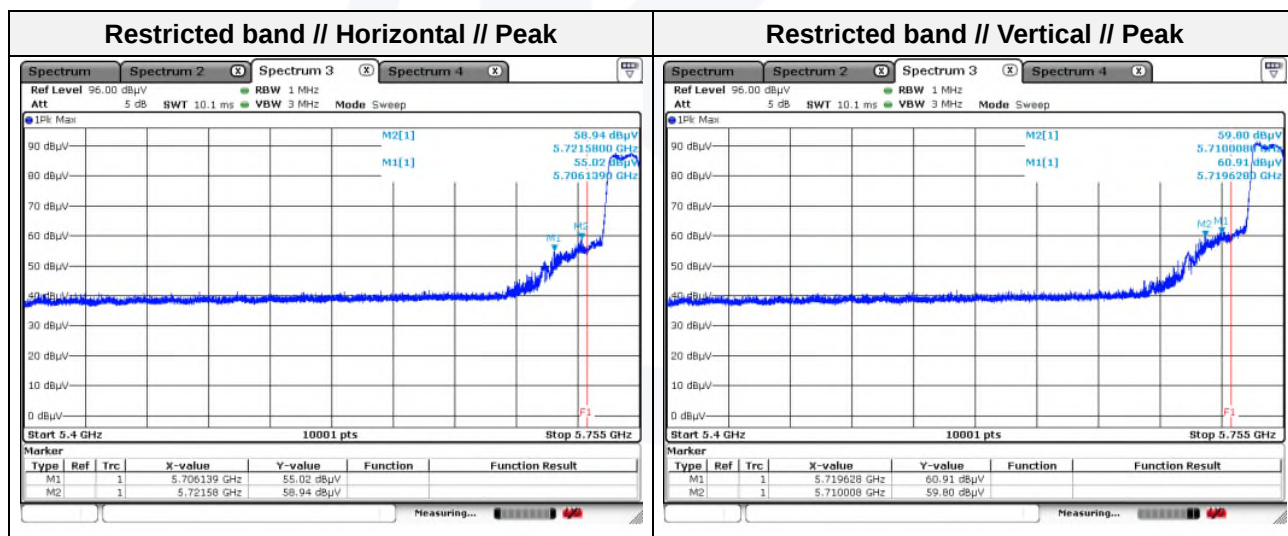

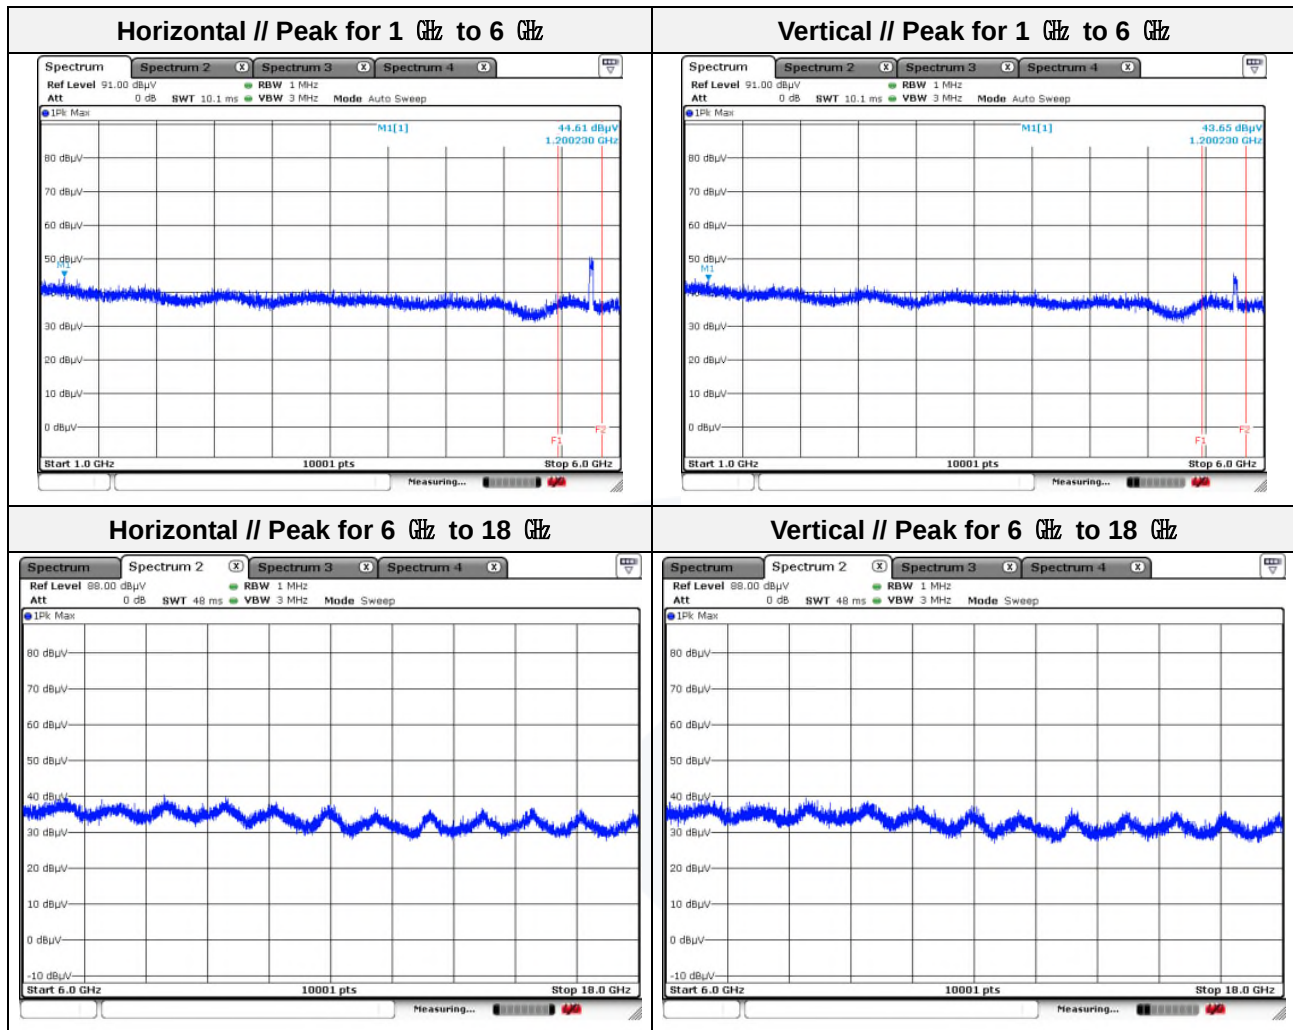

Note.

1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.




Mode: 802.11n_HT40 (MCS0)
Band: UNII-3
Distance of measurement: 3 meter
Channel: 159


- Spurious

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 075.74	44.19	Peak	H	-7.81	-	36.38	74.00	37.62
1 084.24	43.23	Peak	V	-7.77	-	35.46	74.00	38.54

- Band edge

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
5 851.60	55.77	Peak	H	7.36	-	63.13	118.58	55.45
5 851.82	52.85	Peak	V	7.36	-	60.21	118.08	57.87
5 852.51	52.51	Peak	V	7.36	-	59.87	116.51	56.64
5 852.92	55.00	Peak	H	7.36	-	62.36	115.57	53.21

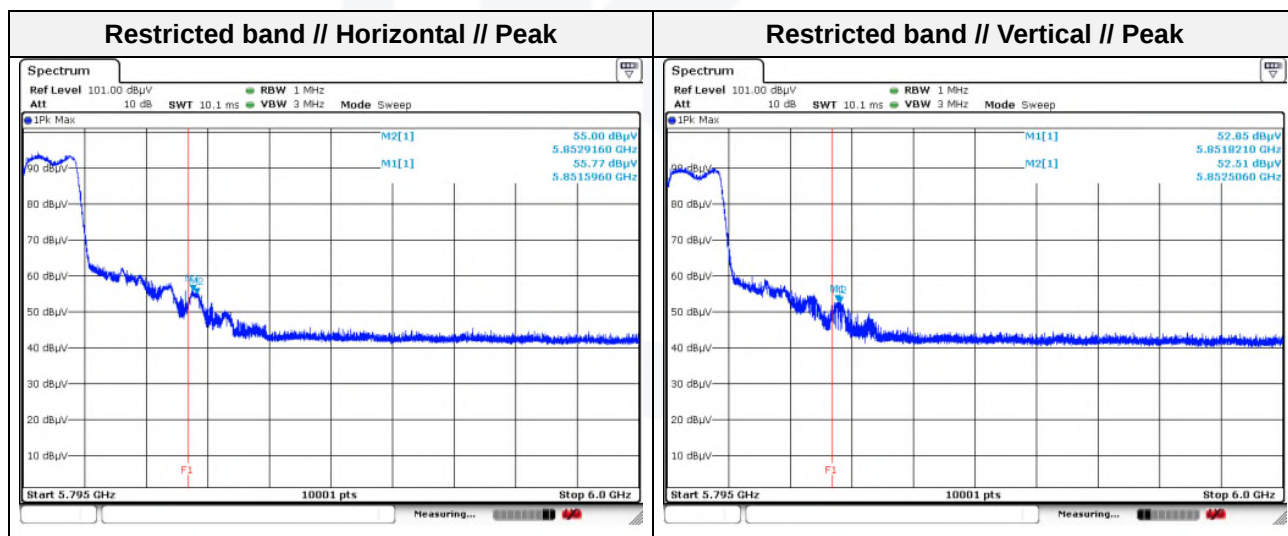

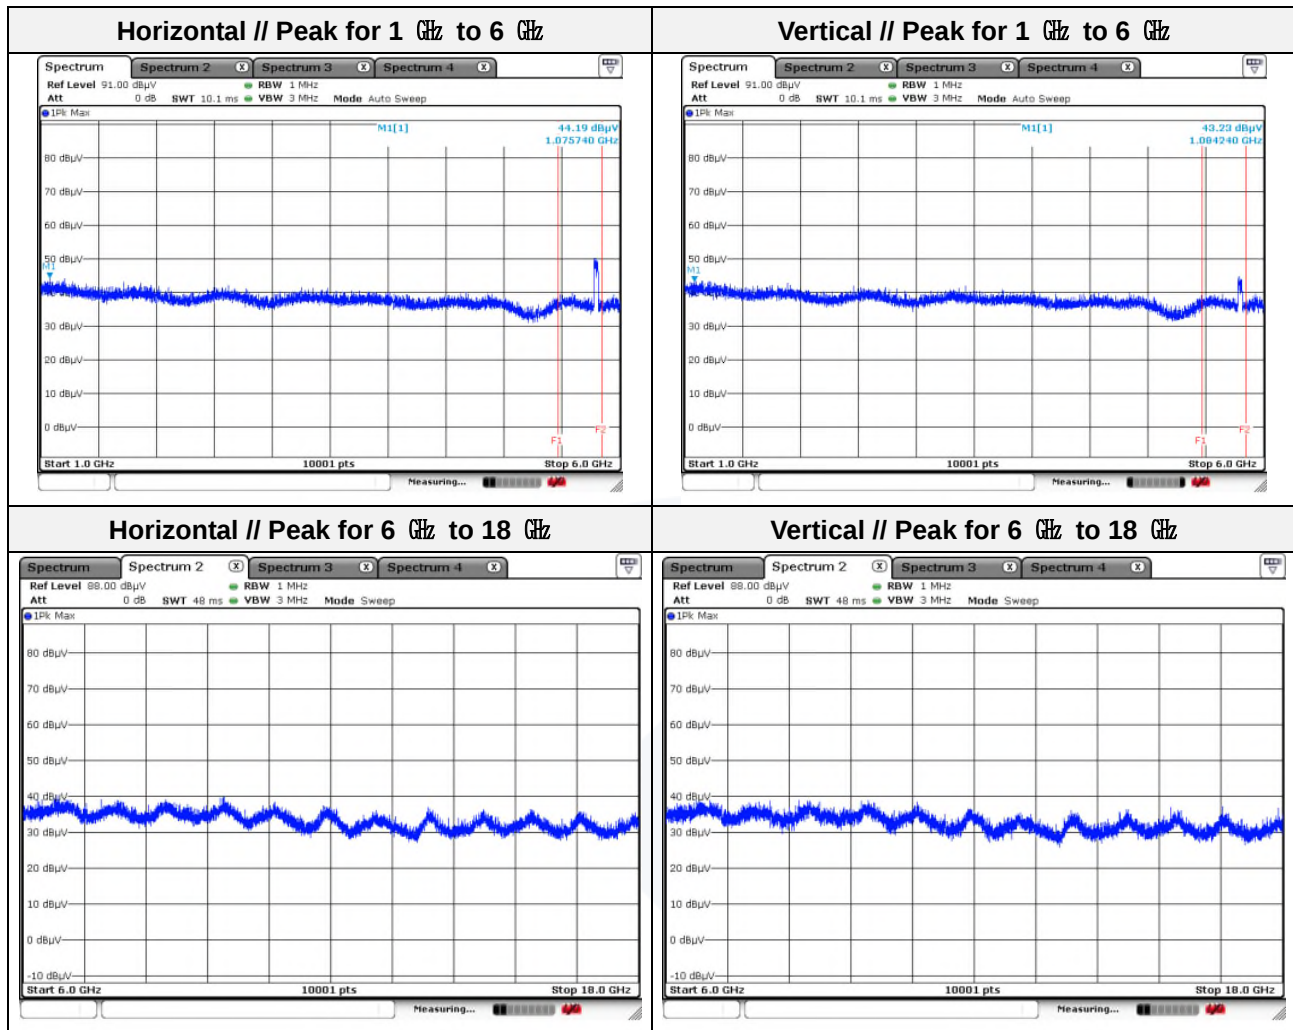

Note.

1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.



Mode: 802.11ac_VHT40 (MCS0)

Band: UNII-3

Distance of measurement: 3 meter


Channel: 151


- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 048.75	44.84	Peak	V	-7.95	-	36.89	74.00	37.11
1 200.73	43.53	Peak	H	-7.17	-	36.36	74.00	37.64

- Band edge


Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
5 712.35	61.01	Peak	H	6.95	-	67.96	108.69	40.73
5 712.92	58.63	Peak	V	6.95	-	65.58	108.85	43.27
5 717.14	60.61	Peak	H	6.96	-	67.57	110.03	42.46
5 722.61	57.81	Peak	V	6.98	-	64.79	116.78	51.99

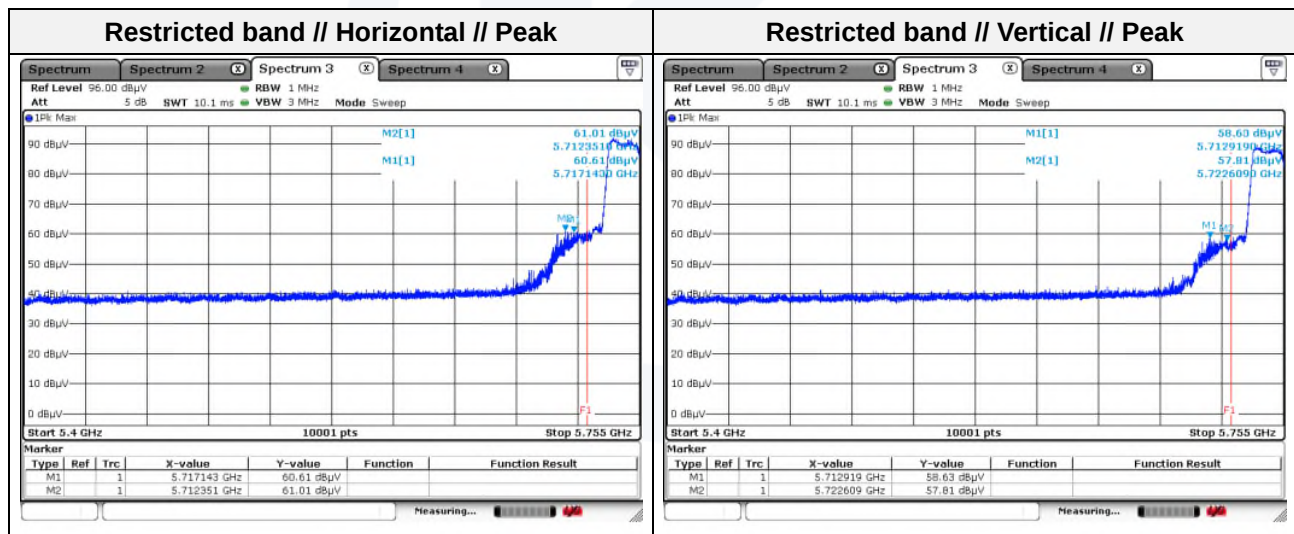

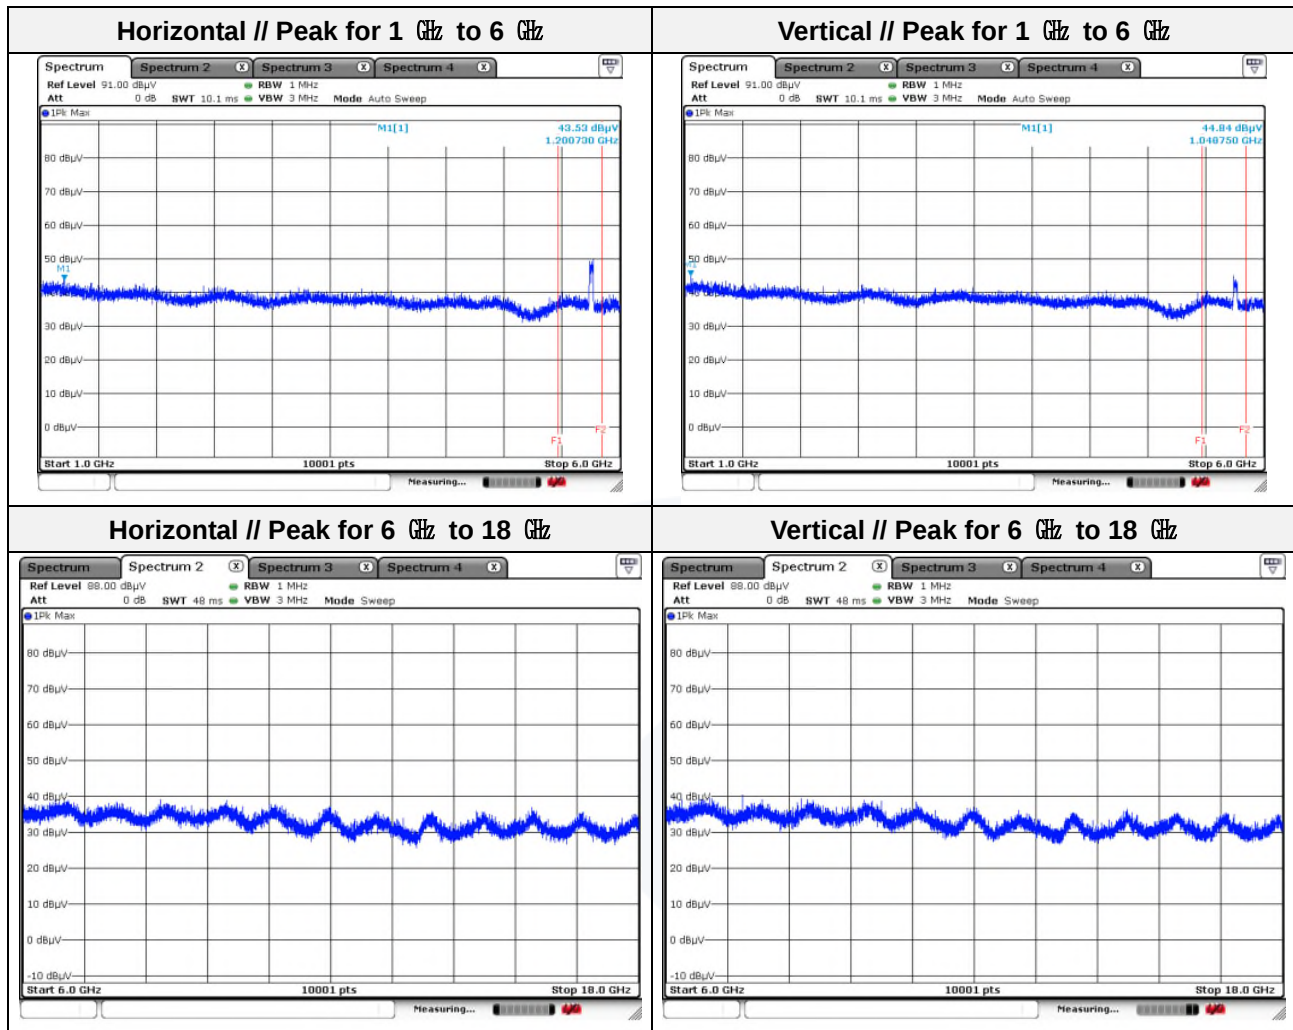

Note.

1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

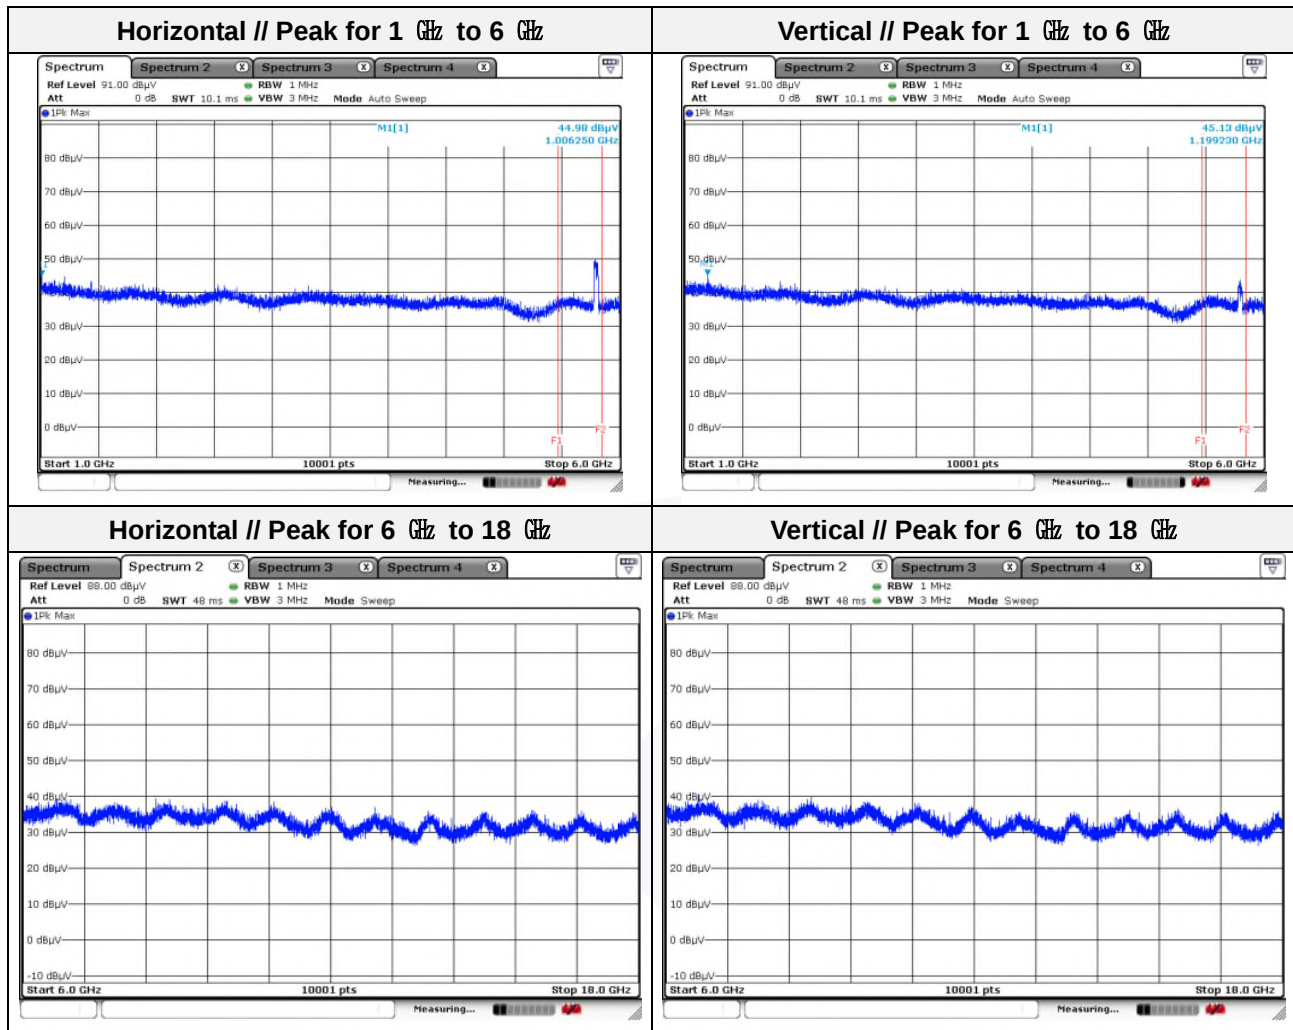

Note.

1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.




Mode: 802.11ax_HE40 (MCS0)
Band: UNII-3
Distance of measurement: 3 meter
Channel: 151


- Spurious

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 032.25	44.46	Peak	H	-8.03	-	36.43	74.00	37.57
1 280.72	43.95	Peak	V	-6.77	-	37.18	68.20	31.02

- Band edge

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
5 711.36	58.33	Peak	V	6.95	-	65.28	108.41	43.13
5 714.62	60.71	Peak	H	6.96	-	67.67	109.32	41.65
5 723.32	59.61	Peak	V	6.98	-	66.59	118.40	51.81
5 723.85	61.60	Peak	H	6.98	-	68.58	119.61	51.03

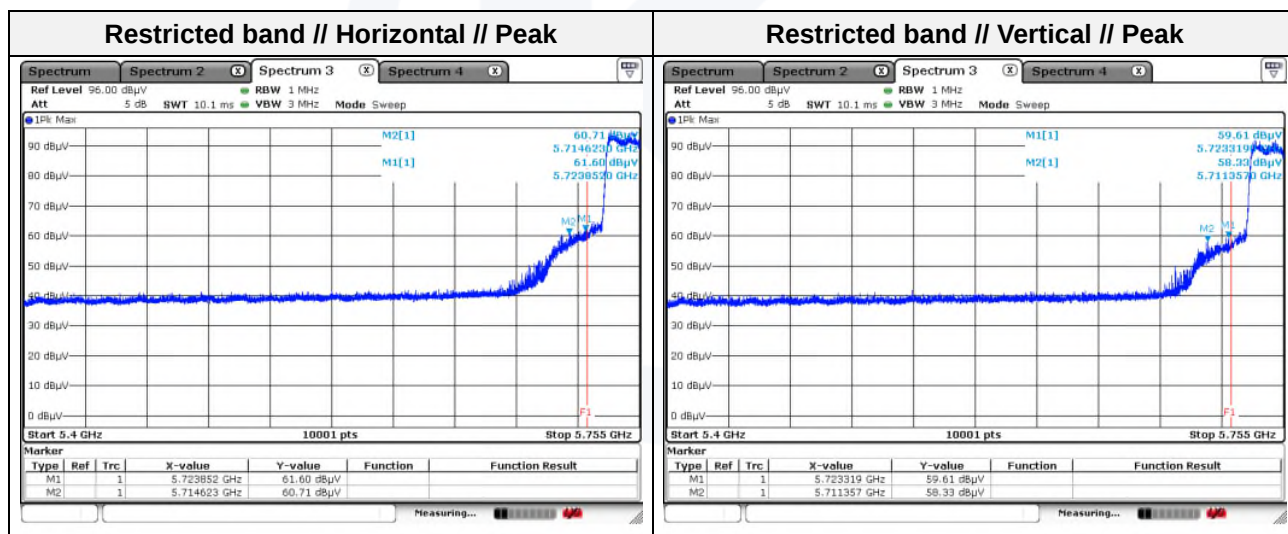

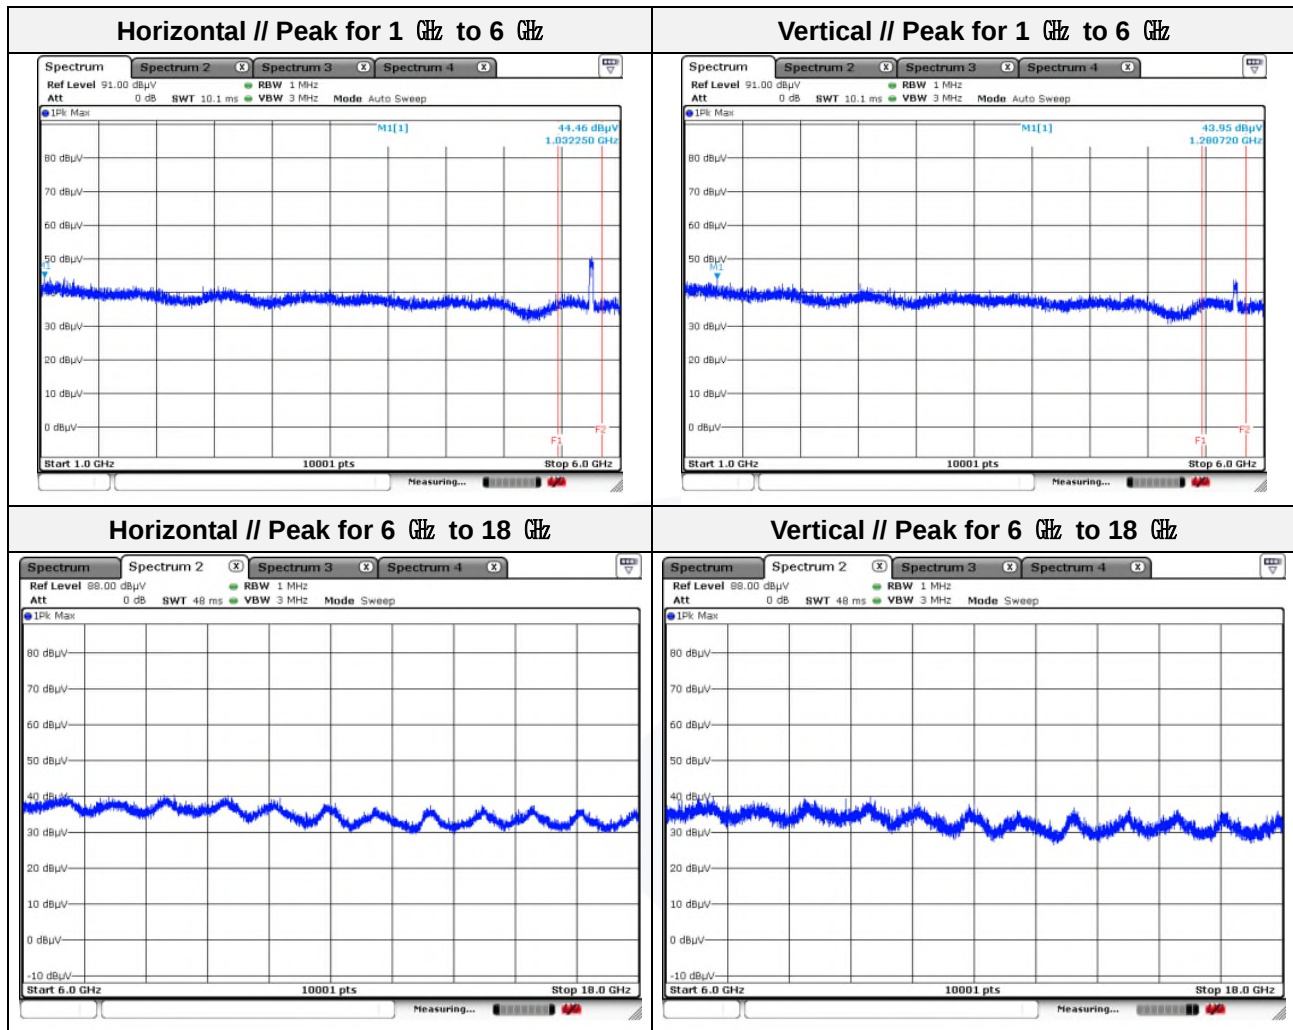

Note.

1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.




Mode: 802.11ax_HE40 (MCS0)
Band: UNII-3
Distance of measurement: 3 meter
Channel: 159


- Spurious

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 199.23	44.42	Peak	H	-7.17	-	37.25	74.00	36.75
1 214.23	44.46	Peak	V	-7.10	-	37.36	74.00	36.64

- Band edge

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
5 850.71	46.20	Peak	V	7.35	-	53.55	120.61	67.06
5 854.00	49.80	Peak	H	7.37	-	57.17	113.11	55.94
5 854.96	49.79	Peak	H	7.37	-	57.16	110.92	53.76
5 866.06	46.10	Peak	V	7.41	-	53.51	107.73	54.22

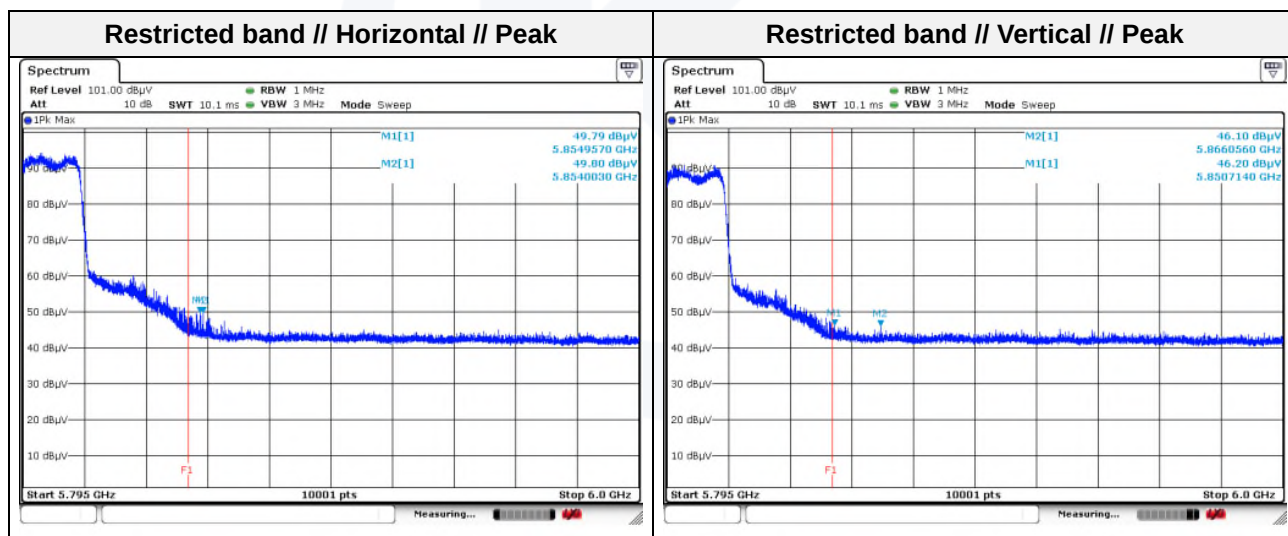

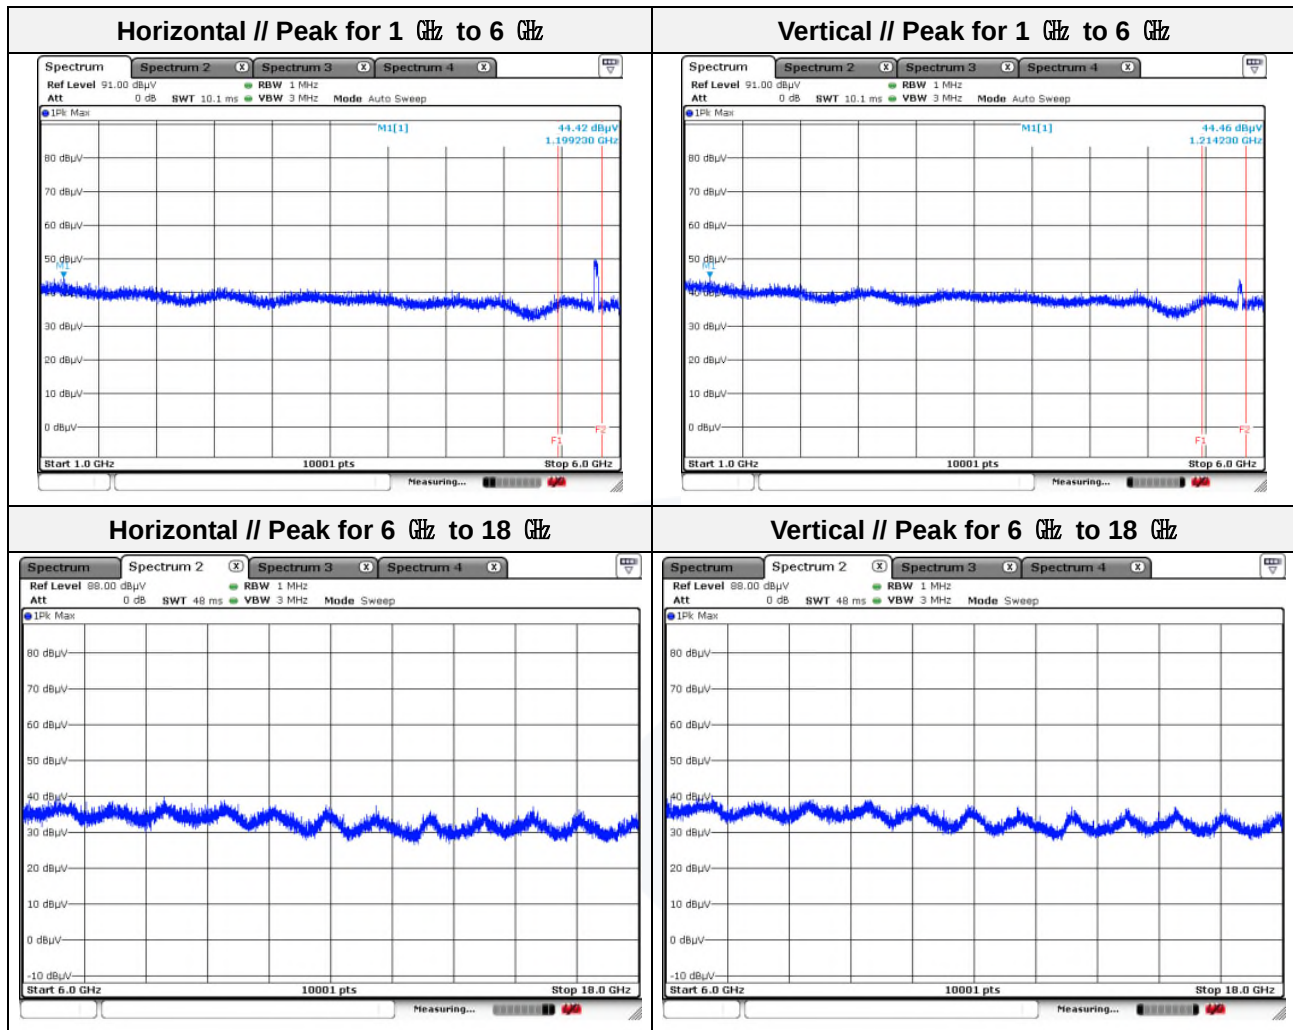

Note.

1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.



Mode: 802.11ac_VHT80 (MCS0)
Band: UNII-3
Distance of measurement: 3 meter
Channel: 155

- Spurious


Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 214.73	43.72	Peak	H	-7.10	-	36.62	74.00	37.38
1 266.22	43.32	Peak	V	-6.84	-	36.48	68.20	31.72


- Band edge (Lower)

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
5 710.83	48.31	Peak	V	6.95	-	55.26	108.26	53.00
5 716.12	48.71	Peak	V	6.96	-	55.67	109.74	54.07
5 721.89	51.08	Peak	H	6.97	-	58.05	115.14	57.09
5 723.58	50.69	Peak	H	6.98	-	57.67	118.99	61.32

- Band edge (Higher)

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
5 850.65	42.26	Peak	H	7.35	-	49.61	120.75	71.14
5 854.32	42.60	Peak	H	7.37	-	49.97	112.38	62.41
5 865.90	41.94	Peak	V	7.41	-	49.35	107.78	58.43
5 868.26	42.15	Peak	V	7.42	-	49.57	107.12	57.55

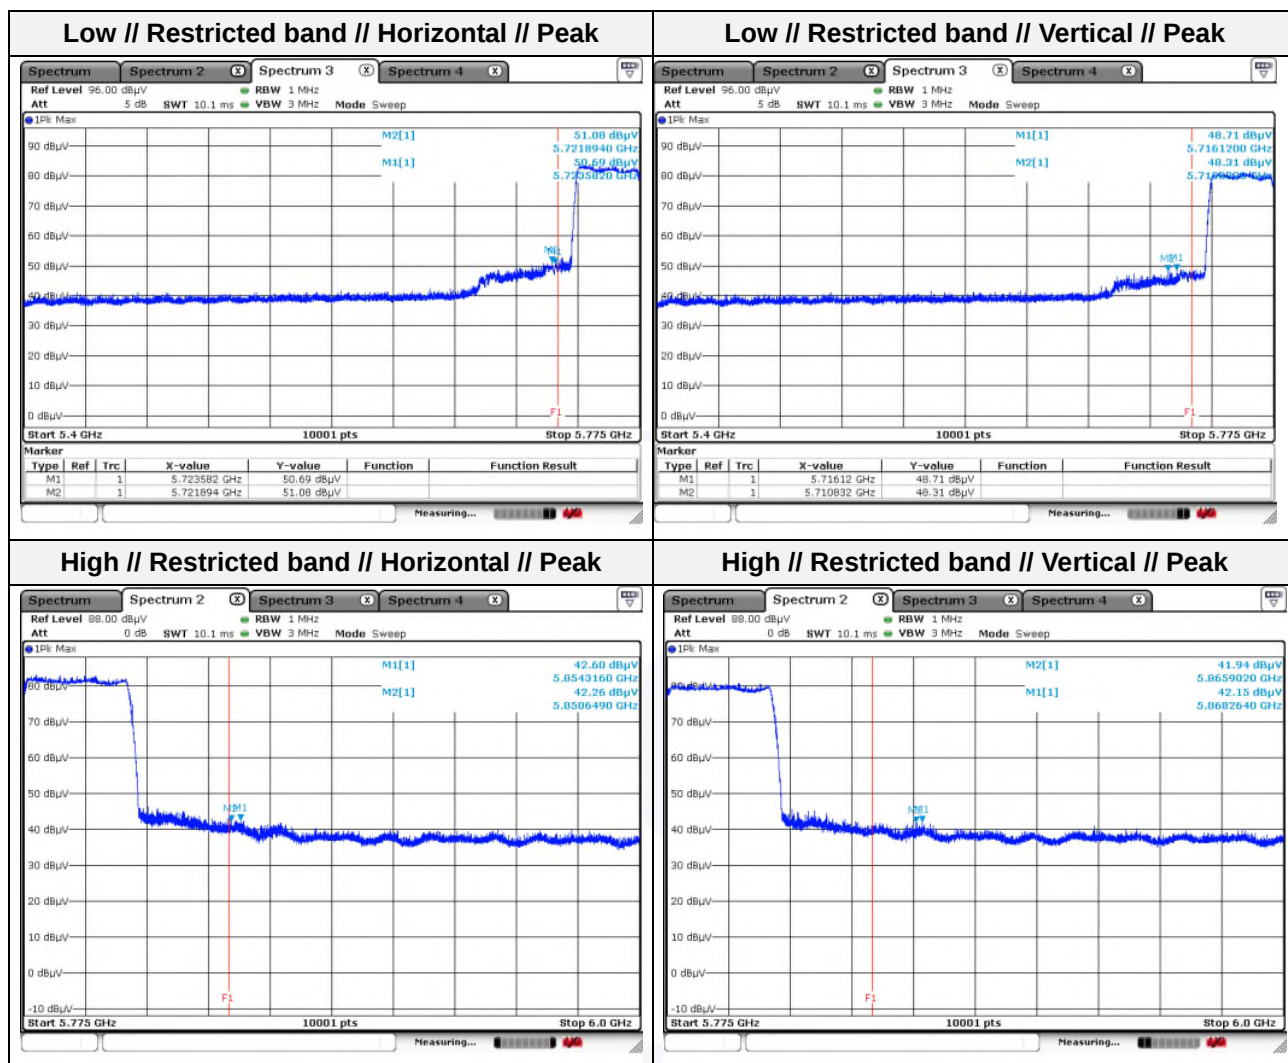

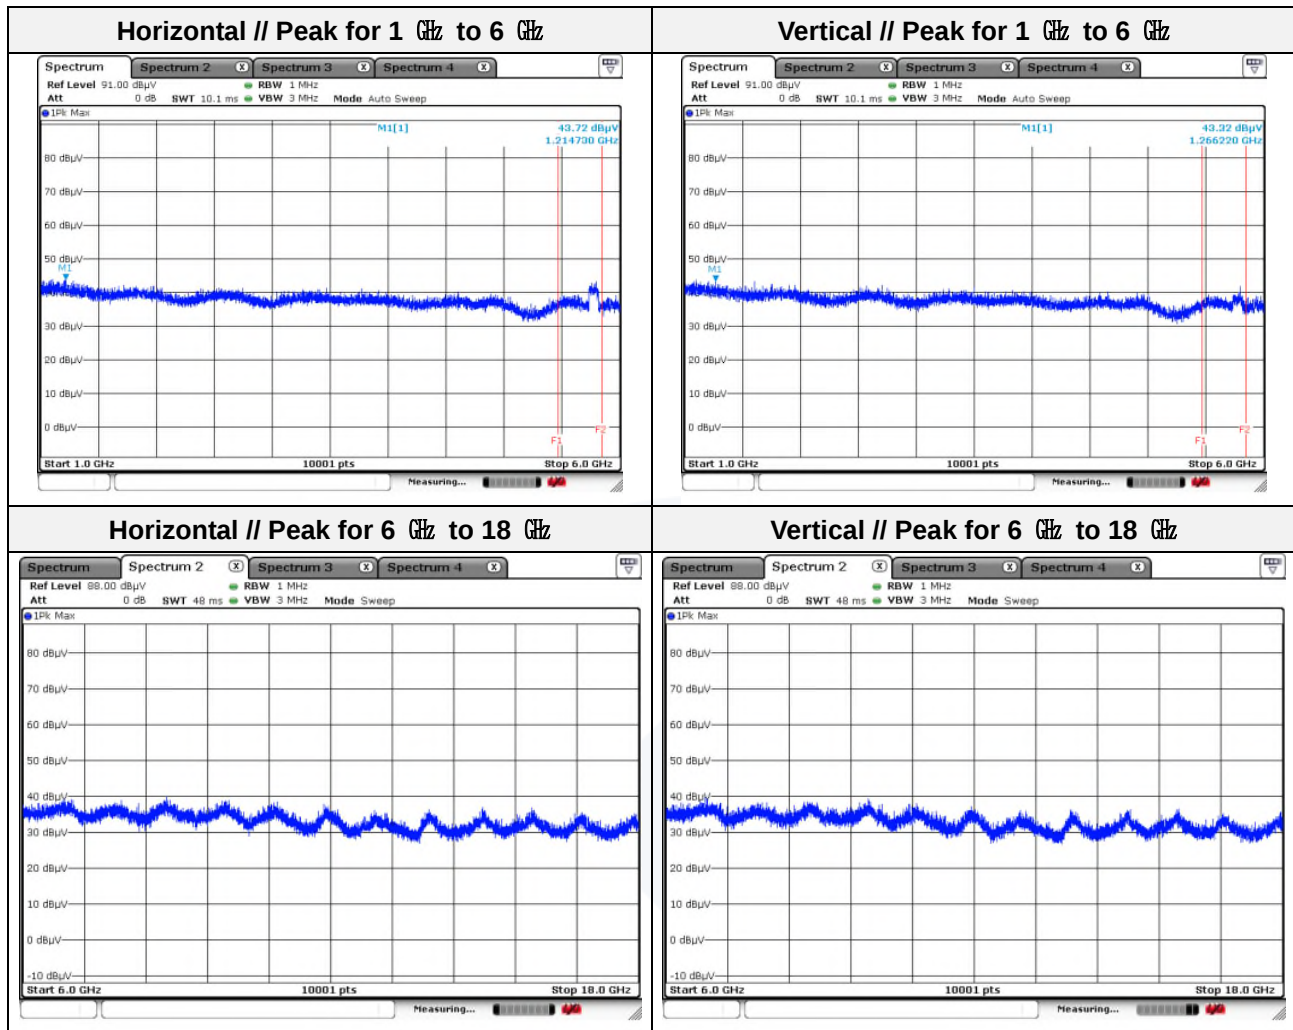

Note.

1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.



Mode: 802.11ax_HE80 (MCS0)
Band: UNII-3
Distance of measurement: 3 meter
Channel: 155

- Spurious


Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 045.25	43.93	Peak	V	-7.97	-	35.96	74.00	38.04
1 199.23	43.90	Peak	H	-7.17	-	36.73	74.00	37.27


- Band edge (Lower)

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
5 699.92	49.26	Peak	V	6.92	-	56.18	105.17	48.99
5 701.87	51.55	Peak	H	6.93	-	58.48	105.75	47.27
5 721.78	50.67	Peak	V	6.97	-	57.64	114.89	57.25
5 721.97	53.96	Peak	V	6.97	-	60.93	115.32	54.39

- Band edge (Higher)

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
5 862.84	44.02	Peak	H	7.40	-	51.42	108.63	57.21
5 864.41	43.04	Peak	H	7.40	-	50.44	108.20	57.76
5 865.48	42.05	Peak	V	7.41	-	49.46	107.90	58.44
5 866.53	42.69	Peak	V	7.41	-	50.10	107.60	57.50

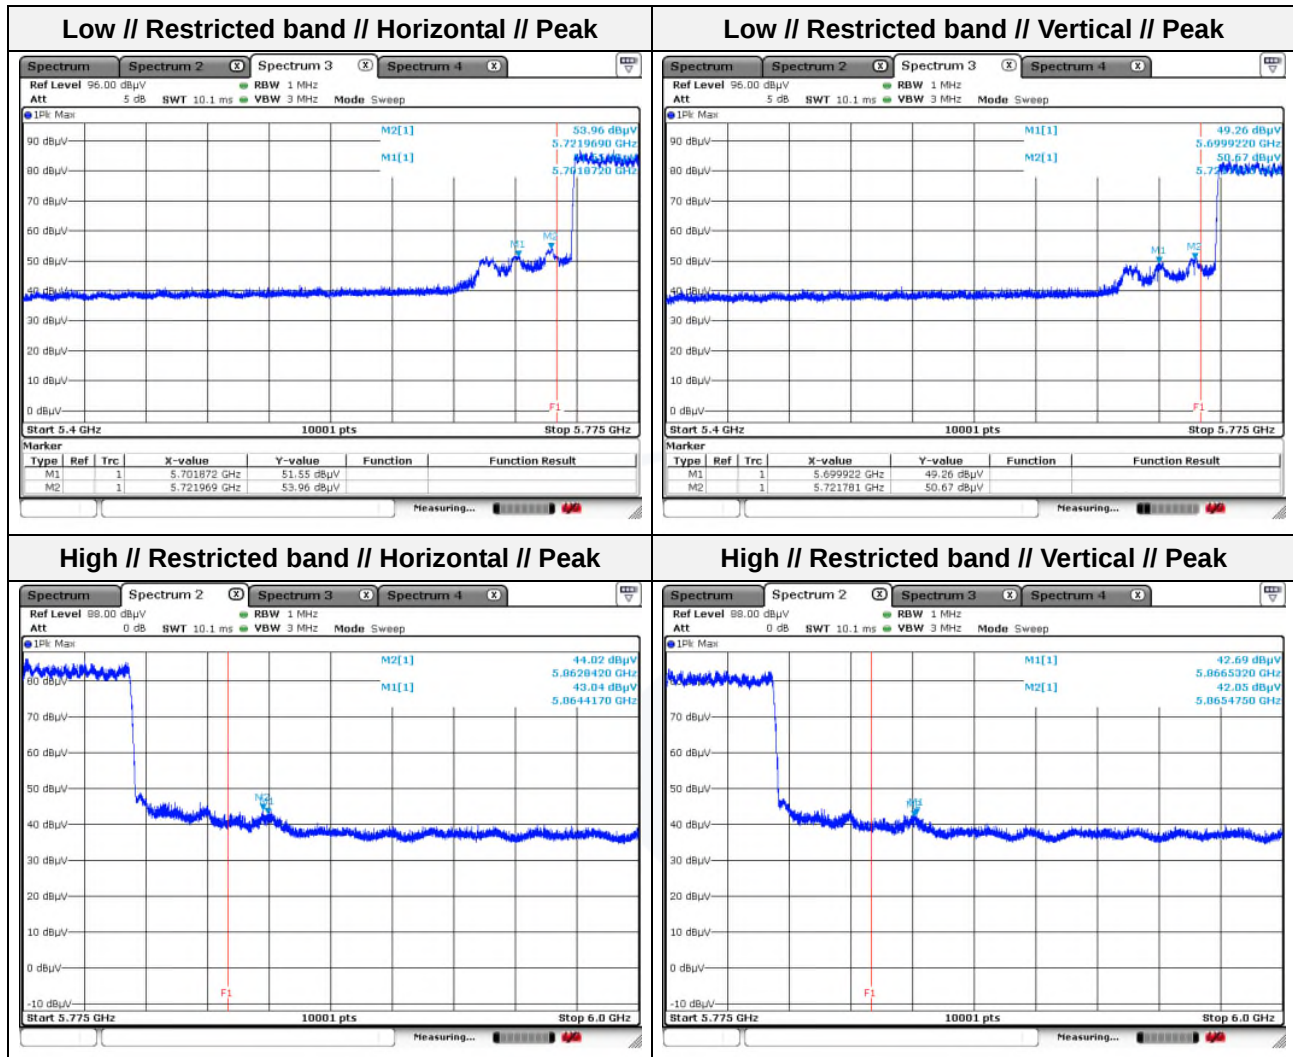

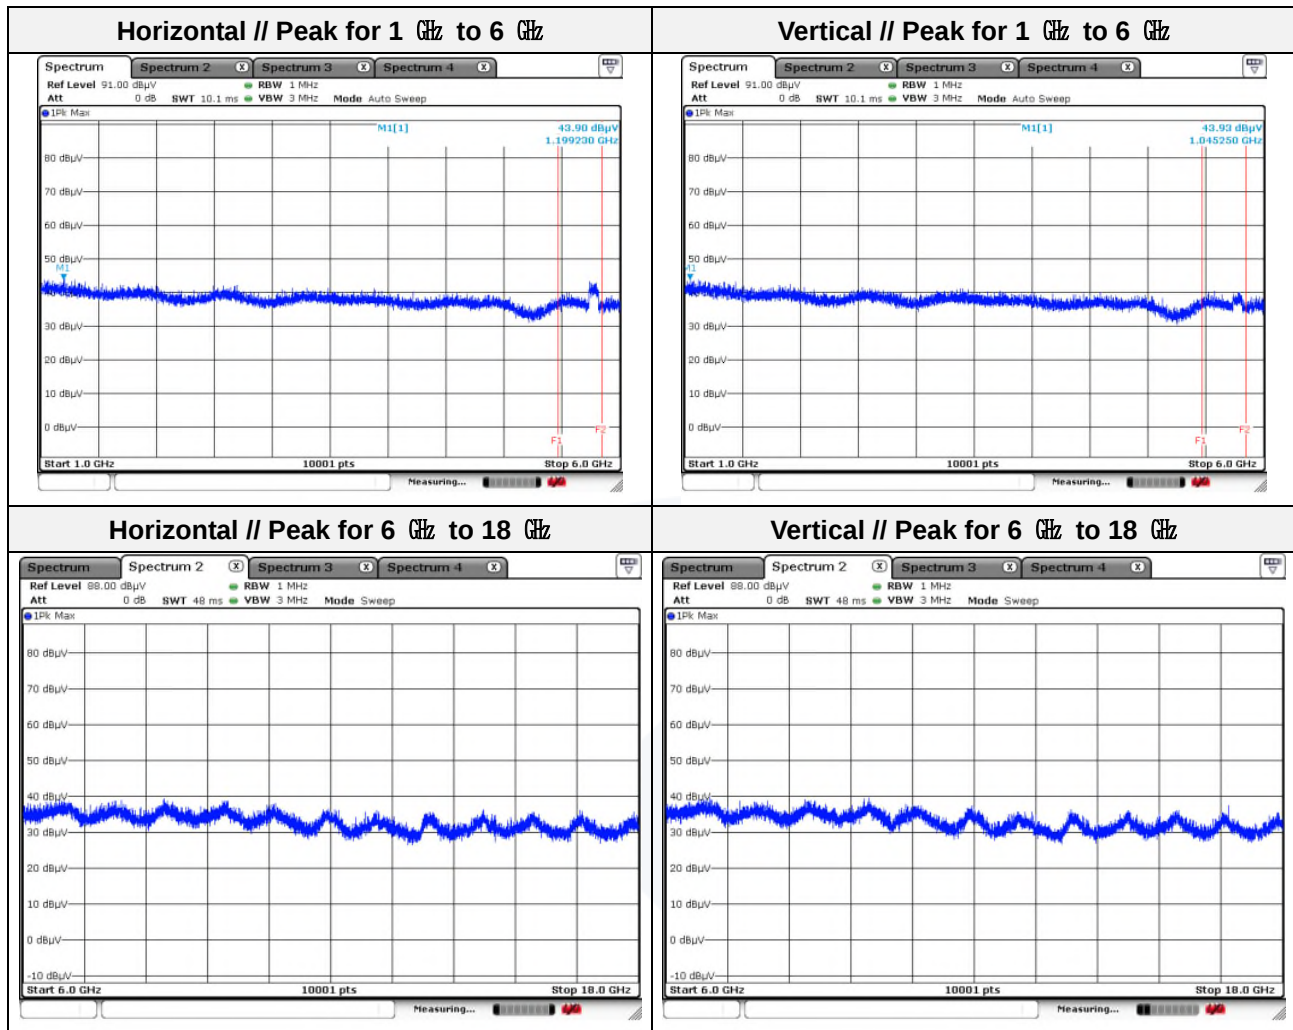


Note.

1. No spurious emission were detected above 6 GHz.
2. Average test would be performed if the peak result were greater than the average limit.



Test results (18 GHz to 40 GHz)

Band 802.11a (6 Mbps) (Worst Case)
Distance of measurement: 3 meter
Channel 52 (Worst Case)

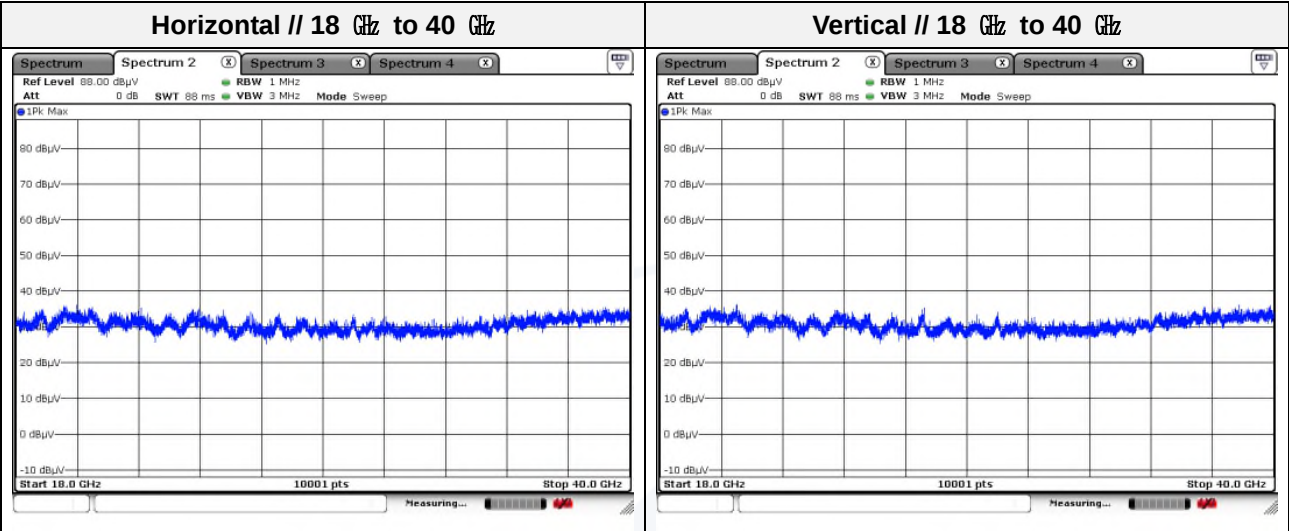

- Note.
1. No spurious emission were detected above 18 GHz.



3.7. AC conducted emissions

Limit

According to 15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50uH/50 ohm line impedance stabilization network (LISN). Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequencies ranges.


Frequency of Emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

**Test results**

Mode: 802.11a (6 Mbps) (Worst Case)_DC 3.3 V

Band: UNII-2A

Channel: 52 (Worst Case)

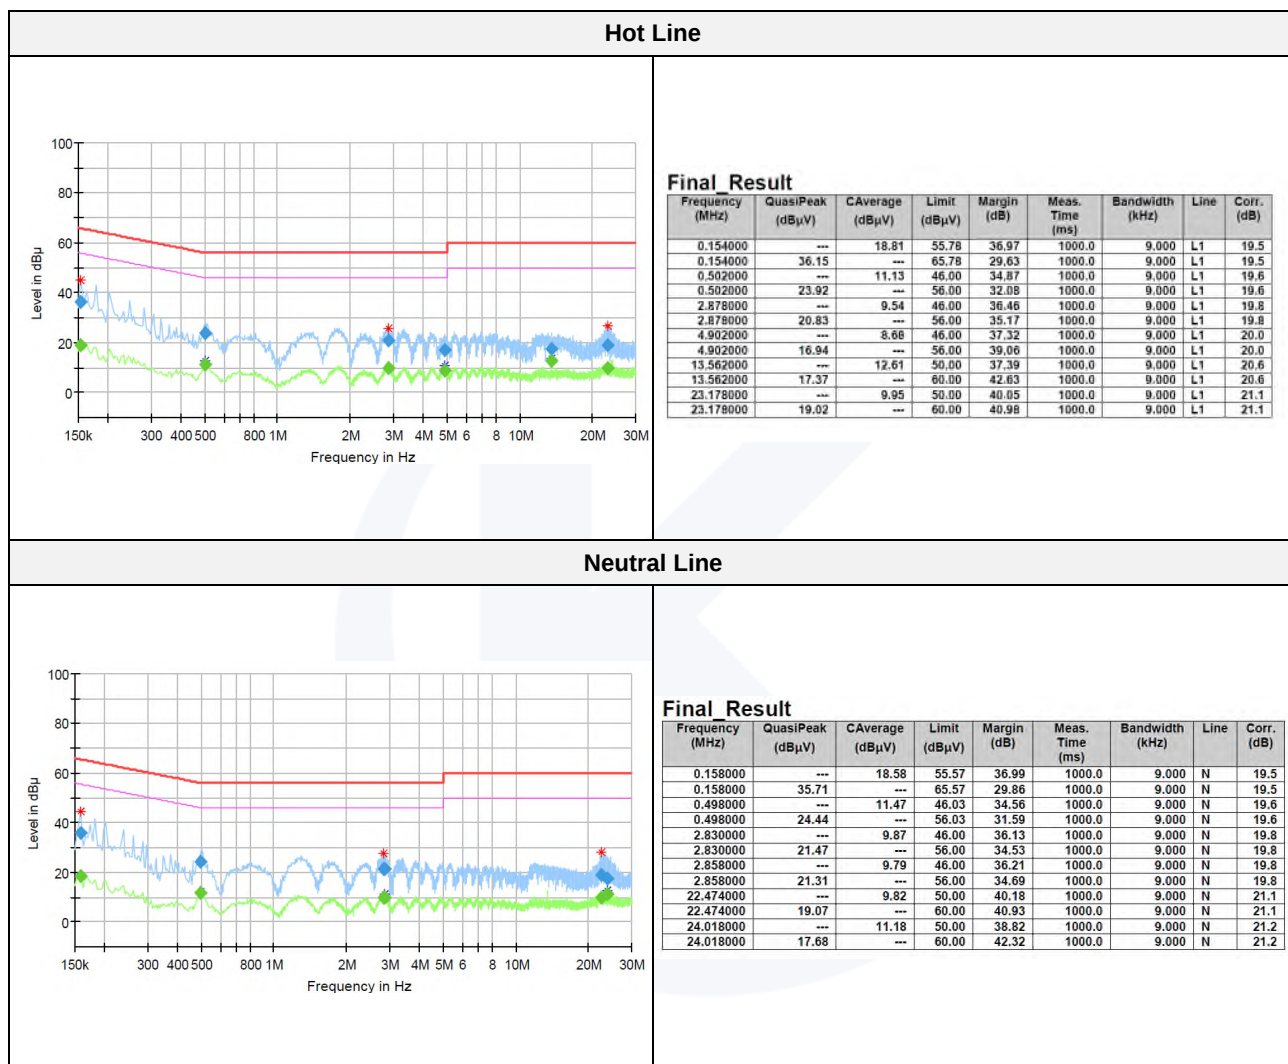




Mode: 802.11a (6 Mbps) (Worst Case)_DC 1.8 V

Band: UNII-2A

Channel: 52 (Worst Case)


Hot Line

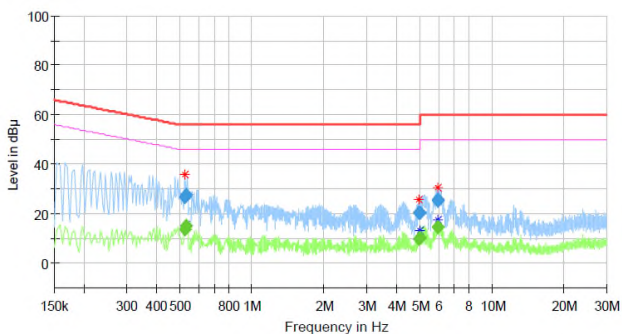

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.526000	---	13.73	46.00	32.27	1000.0	9.000	L1	19.6
0.526000	26.57	---	56.00	29.43	1000.0	9.000	L1	19.6
0.530000	---	15.06	46.00	30.94	1000.0	9.000	L1	19.6
0.530000	27.56	---	56.00	28.44	1000.0	9.000	L1	19.6
4.974000	---	10.02	46.00	35.98	1000.0	9.000	L1	20.0
4.974000	20.17	---	56.00	35.83	1000.0	9.000	L1	20.0
4.998000	---	10.37	46.00	35.63	1000.0	9.000	L1	20.0
4.998000	20.58	---	56.00	35.42	1000.0	9.000	L1	20.0
5.962000	---	14.47	50.00	35.53	1000.0	9.000	L1	20.1
5.962000	25.30	---	60.00	34.70	1000.0	9.000	L1	20.1
5.974000	---	14.71	50.00	35.29	1000.0	9.000	L1	20.1
5.974000	25.55	---	60.00	34.45	1000.0	9.000	L1	20.1

Neutral Line

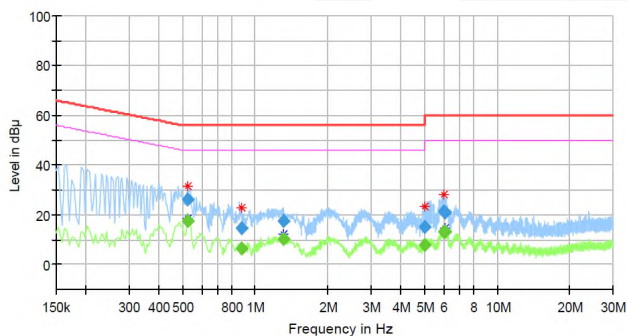

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.526000	25.98	---	56.00	30.02	1000.0	9.000	N	19.6
0.526000	---	17.70	46.00	28.30	1000.0	9.000	N	19.6
0.882000	14.70	---	56.00	41.30	1000.0	9.000	N	19.6
0.882000	---	6.40	46.00	39.60	1000.0	9.000	N	19.6
1.302000	17.44	---	56.00	38.56	1000.0	9.000	N	19.6
1.302000	---	10.27	46.00	35.73	1000.0	9.000	N	19.6
5.018000	---	7.73	50.00	42.27	1000.0	9.000	N	20.0
5.018000	15.07	---	60.00	44.93	1000.0	9.000	N	20.0
5.990000	---	13.10	50.00	36.90	1000.0	9.000	N	20.1
5.990000	21.16	---	60.00	38.84	1000.0	9.000	N	20.1
6.062000	---	12.93	50.00	37.07	1000.0	9.000	N	20.1
6.062000	20.72	---	60.00	39.28	1000.0	9.000	N	20.1



3.8. Antenna Requirement

According to 15.207(a), An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

**Appendix A. Measurement equipment**

Equipment	Manufacturer	Model	Serial No.	Calibration interval	Calibration due.
Spectrum analyzer	R&S	FSV3044	101272	1 year	2024.03.16
Spectrum analyzer	R&S	FSV40-N	102194	1 year	2024.08.08
SIGNAL GENERATOR	KEYSIGHT	N5182B	MY59100115	1 year	2024.04.19
SIGNAL GENERATOR	Anritsu	68369B	002118	1 year	2024.05.12
Power Meter	Anritsu	ML2495A	2010001	1 year	2024.04.19
Pulse Power Sensor	Anritsu	MA2411B	1911111	1 year	2024.04.18
Attenuator	Mini-Circuits	BW-S10-2W263+	2	1 year	2024.01.13 2025.01.15
Attenuator	HP	8494B	2630A12857	1 year	2024.01.12 2025.01.12
Attenuator	HP	8495B	2814A14772	1 year	2024.01.12 2025.01.12
Attenuator	Agilent	8494B	MY42143296	1 year	2024.01.12 2025.01.12
ACTIVE LOOP ANTENNA	SCHWARZBECK	FMZB 1513	1513-257	2 years	2025.03.22
TRILOG-BROADBAND ANTENNA	Schwarzbeck	VULB 9163	714	2 years	2024.04.19
BAND REJECT FILTER	MICRO-TRONICS	BRM50716	G199	1 year	2024.01.12 2025.01.12
Attenuator	HUBER+SHHNER	6806.17.A	NONE	1 year	2024.03.21
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1802	1 year	2024.11.03
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA 9170550	1 year	2024.01.16 2025.01.16
Amplifier	SONOMA INSTRUMENT	310N	186549	1 year	2024.03.21
PREAMPLIFIER	HP	8449B	3008A00538	1 year	2024.05.31
BROADBAND AMPLIFIER	SCHWARZBECK	BBV9721	PS9721-003	1 year	2024.01.16 2025.01.15
DC POWER SUPPLY	AGILENT	6632B	MY43004090	1 year	2024.06.19
DC POWER SUPPLY	AGILENT	6632B	MY43004130	1 year	2024.06.14
EMI Test Receiver	R&S	ESU26	100517	1 year	2024.07.31
EMI Test Receiver	R&S	ESR3	101783	1 year	2024.11.08
PULSE LIMITER	R&S	ESH2-Z2	101915	1 year	2024.11.08
LISN	R&S	ENV216	101787	1 year	2024.11.08

* Statement of Traceability: KES Co., Ltd. attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Peripheral devices

Device	Manufacturer	Model No.	Serial No.
Notebook computer	LG Electronics Inc.,	LGS53	306QCZP560949
Test Jig Board	N/A	N/A	N/A

The end of test report.