


Appendix B. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	24°C	Humidity	55%
Test Engineer	Eason Chen / Gino Huang / Brian Sun / Lucke Hsieh	Configurations	2.4GHz + 5GHz + 60GHz

Horizontal

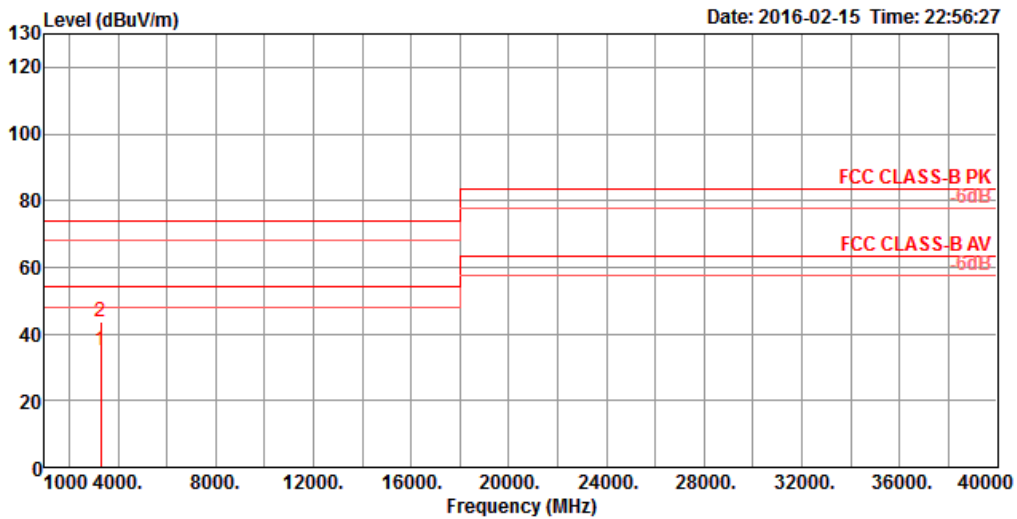

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	3282.55	34.94	54.00	-19.06	36.24	5.43	29.94	36.67	133	53 Average	HORIZONTAL
2	3282.65	43.84	74.00	-30.16	45.14	5.43	29.94	36.67	133	53 Peak	HORIZONTAL

Vertical

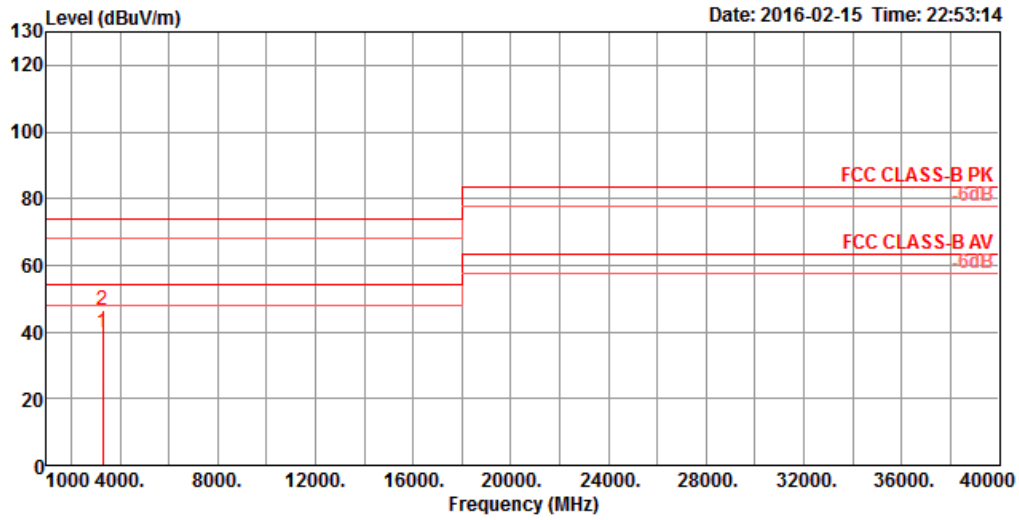

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	3282.58	39.82	54.00	-14.18	41.12	5.43	29.94	36.67	116	191	Average	VERTICAL
2	3282.74	46.58	74.00	-27.42	47.88	5.43	29.94	36.67	116	191	Peak	VERTICAL