



3DH5 Number of Hopping Channels


2402 ~ 2421MHz

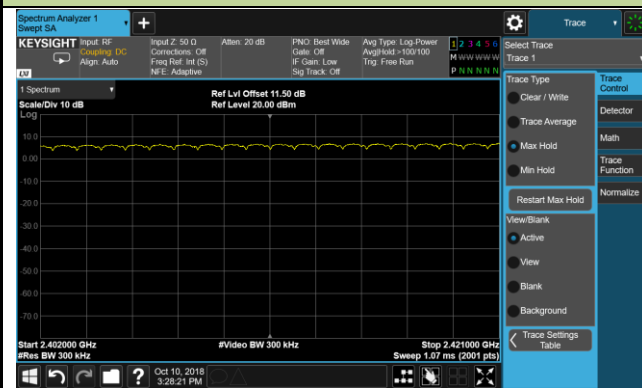


2422 ~ 2441MHz

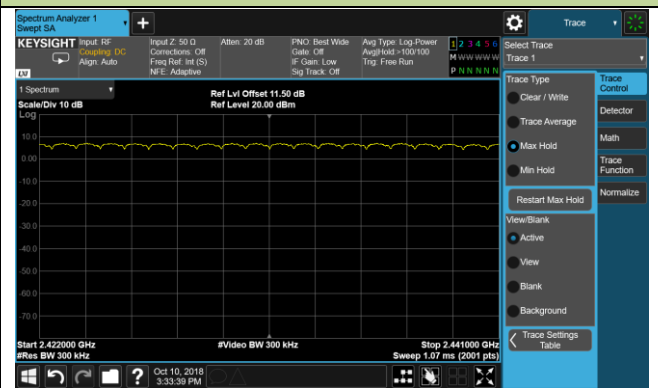

2442 ~ 2461MHz

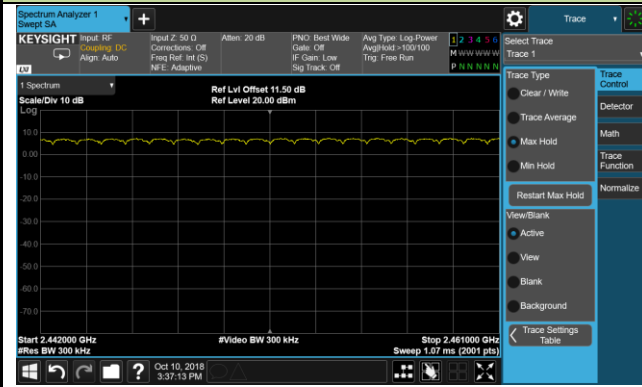

2462 ~ 2480MHz

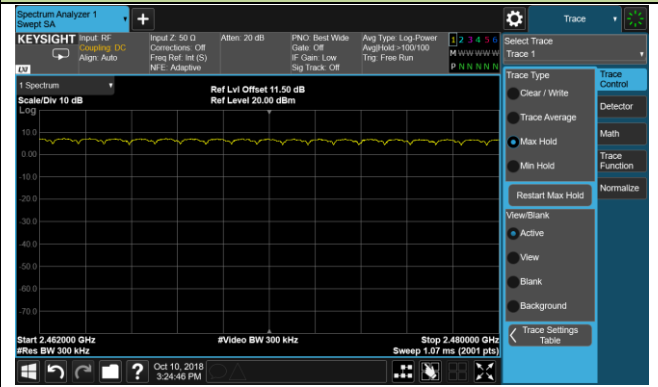

7.6. Time of Occupancy Measurement

7.6.1. Test Limit

The maximum permissible time of occupancy is 400ms within a period of 400ms multiplied by the number of hopping channels employed.


7.6.2. Test Procedure Used

ANSI C63.10-2013 - Section 7.8.4

7.6.3. Test Setting

1. Span = zero span, centered on a hopping channel.
2. RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel.
3. VBW \geq RBW
4. Sweep time = as necessary to capture the entire dwell time per hopping channel
5. Detector = Peak
6. Trace mode = max hold
7. Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time. An oscilloscope may be used instead of a spectrum analyzer. The EUT shall show compliance with the appropriate regulatory limit for the number of hopping channels. A plot of the data shall be included in the test report.

7.6.4. Test Setup

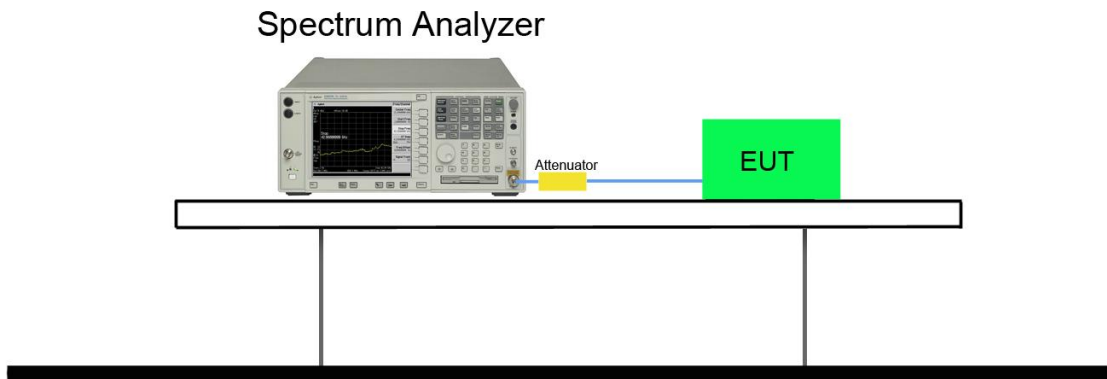

7.6.5. Test Result

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	25°C
Test Engineer	Snake Ni	Relative Humidity	56%
Test Site	TR3	Test Date	2018/09/25

Test Mode	Channel No.	Frequency (MHz)	Hops Over Occupancy Time(Hops)	Packet Transfer Time (ms)	Time of Occupancy (ms)	Limit (ms)	Result
3DH1	39	2441	320	0.385	123.20	≤ 400	Pass
3DH3	39	2441	160	1.640	262.40	≤ 400	Pass
3DH5	39	2441	107	2.880	308.16	≤ 400	Pass



Note 1: According the Bluetooth Standard Specification, the nominal hop rate is 1600 hops/s. All Bluetooth unit participating in the piconet are time and hop synchronized to the channel.

Hops Over Occupancy Time in 31.6s for 3DH1 = $1600 / 2 / 79 * 31.6 = 320$.

Hops Over Occupancy Time in 31.6s for 3DH3 = $1600 / 4 / 79 * 31.6 = 160$.

Hops Over Occupancy Time in 31.6s for 3DH5 = $1600 / 6 / 79 * 31.6 = 107$.

Note 2: Time of Occupancy = Packet Transfer Time * Hops Over Occupancy Time in 31.6s.

7.7. Band-edge Compliance Measurement

7.7.1. Test Limit

The maximum permissible emission level is 20dBc. Any emissions were lying outside of the emission bandwidth and in authorized band edges to a field strength limit specified in Section 15.209 of the Title 47 CFR.


7.7.2. Test Procedure Used

ANSI C63.10-2013 - Section 6.10.4

7.7.3. Test Setting

1. Span = wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation.
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize
8. Allow the trace to stabilize. Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission.

7.7.4. Test Setup

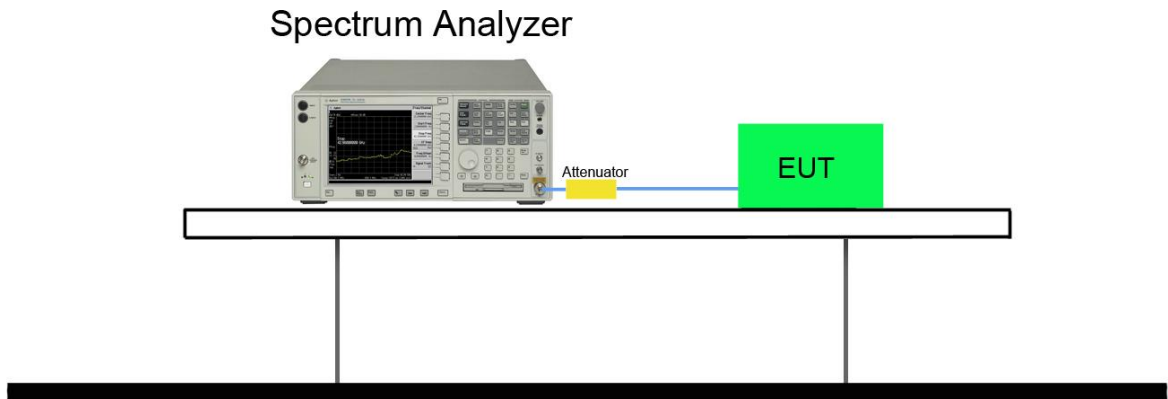


7.7.5. Test Result

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	25°C
Test Engineer	Snake Ni	Relative Humidity	56%
Test Site	TR3	Test Date	2018/10/11


Test Mode	Channel No.	Frequency (MHz)	Limit	Result
DH5	00	2402	20dBc	Pass
DH5	78	2480	20dBc	Pass
2DH5	00	2402	20dBc	Pass
2DH5	78	2480	20dBc	Pass
3DH5	00	2402	20dBc	Pass
3DH5	78	2480	20dBc	Pass

Band-edge Compliance


DH5 - Channel 00 (2402MHz)

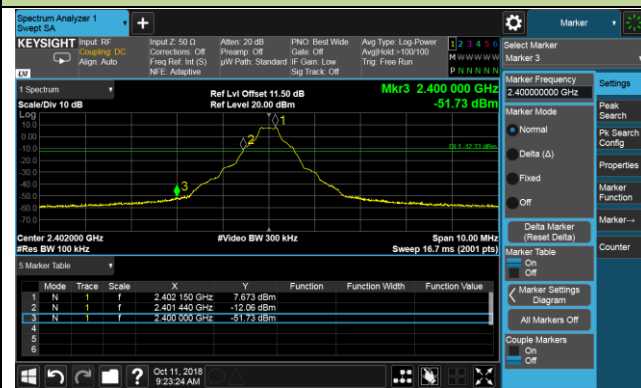


DH5 - Channel 78 (2480MHz)

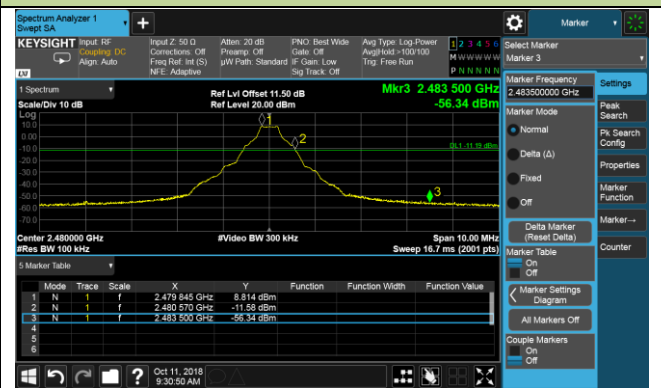


2DH5 - Channel 00 (2402MHz)

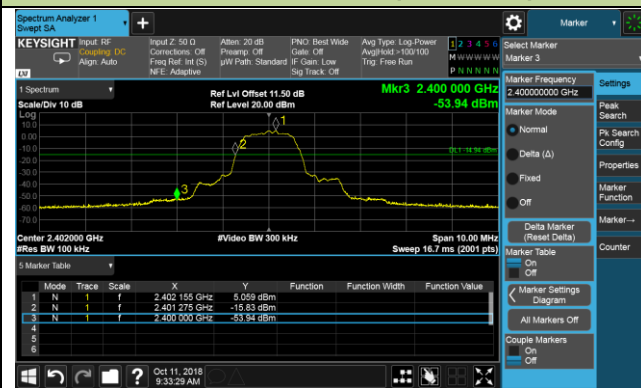


2DH5 - Channel 78 (2480MHz)

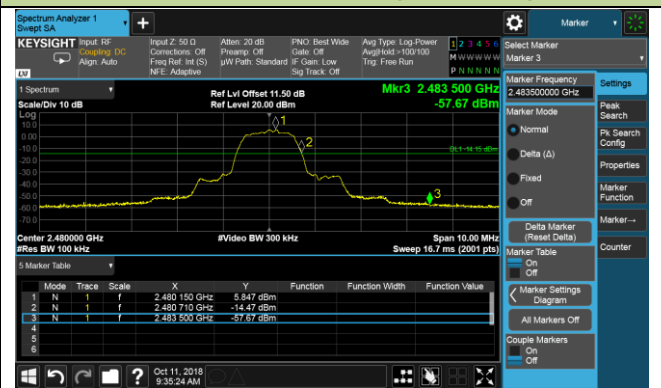

3DH5 - Channel 00 (2402MHz)

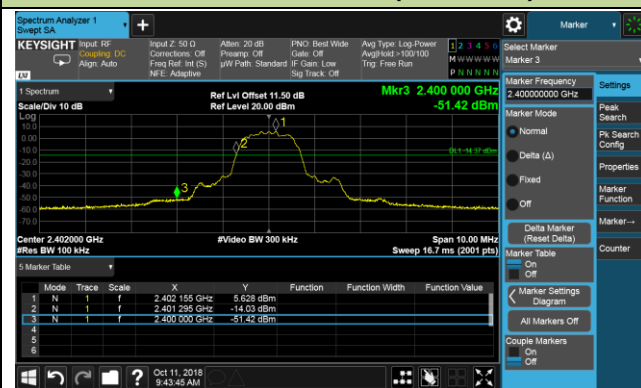


3DH5 - Channel 78 (2480MHz)

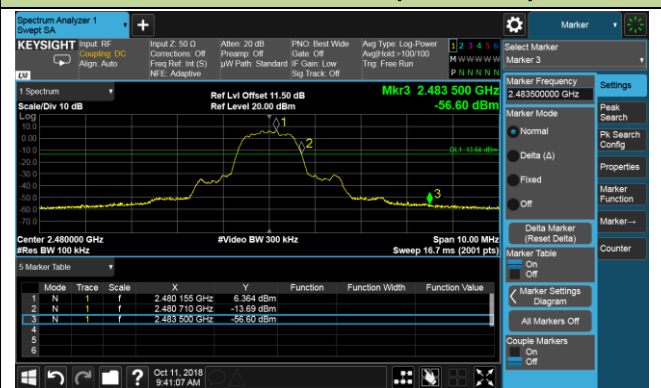


Operation Frequency Range of 20dB Bandwidth within Hopping Mode


DH5 - Channel 00 (2402MHz)

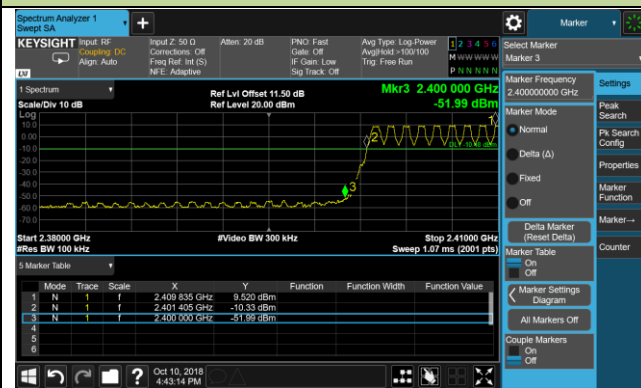


DH5 - Channel 78 (2480MHz)

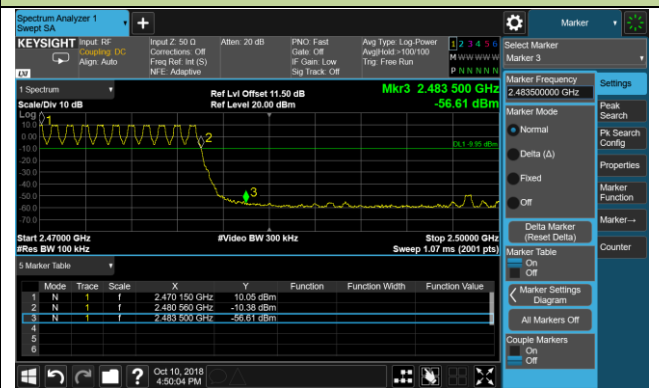


2DH5 - Channel 00 (2402MHz)

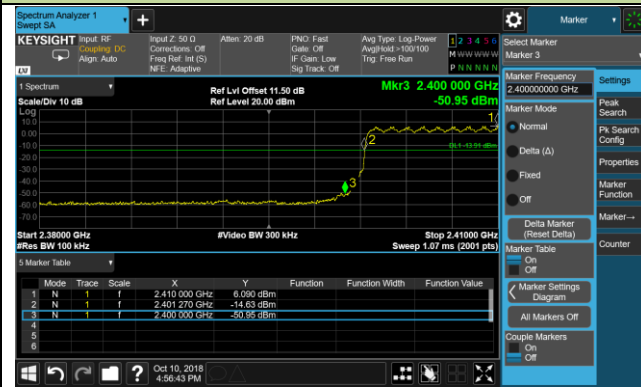


2DH5 - Channel 78 (2480MHz)

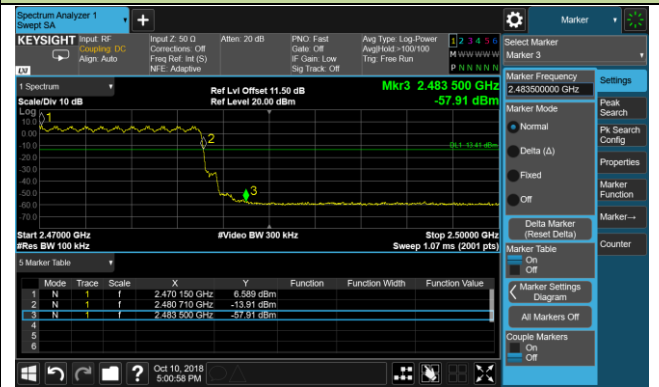

3DH5 - Channel 00 (2402MHz)

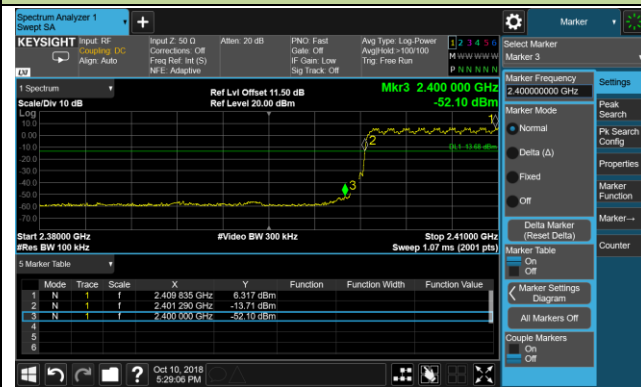

3DH5 - Channel 78 (2480MHz)

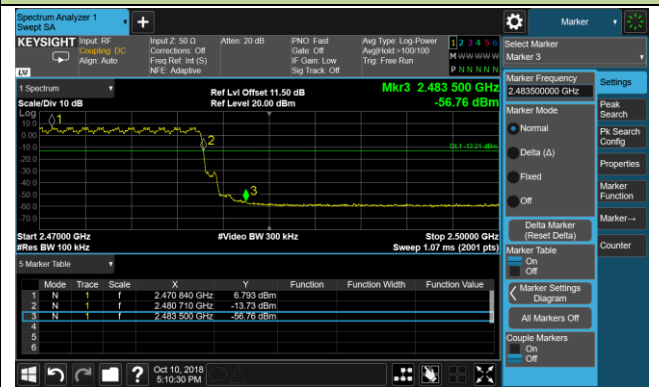

7.8. Conducted Spurious Emissions Measurement

7.8.1. Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.


7.8.2. Test Procedure Used

ANSI C63.10-2013 - Section 7.8.8

7.8.3. Test Setting

1. Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.
Typically, several plots are required to cover this entire span.
2. RBW = 100 KHz
3. VBW \geq RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize
8. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this section.

7.8.4. Test Setup

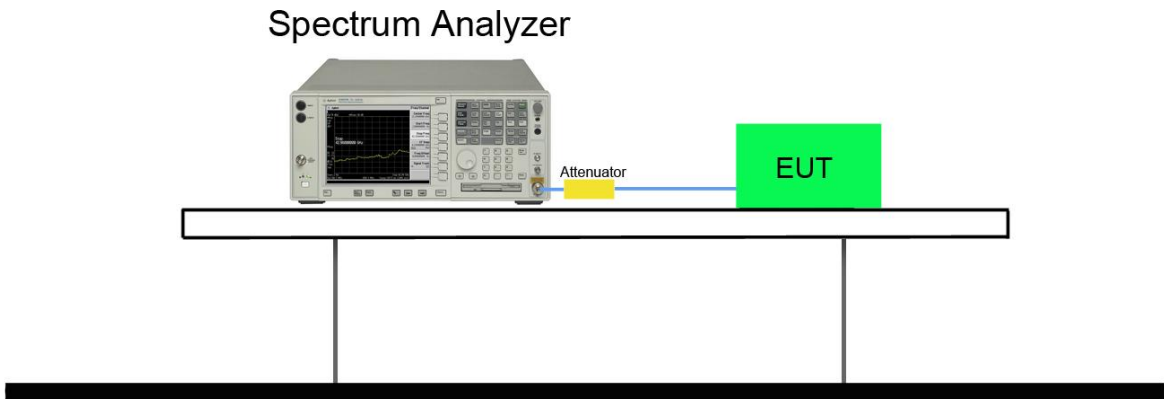

7.8.5. Test Result

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	25°C
Test Engineer	Snake Ni	Relative Humidity	56%
Test Site	TR3	Test Date	2018/09/25

Test Mode	Channel No.	Frequency (MHz)	Limit (MHz)	Result
DH5	00	2402	20dBc	Pass
DH5	39	2441	20dBc	Pass
DH5	78	2480	20dBc	Pass
2DH5	00	2402	20dBc	Pass
2DH5	39	2441	20dBc	Pass
2DH5	78	2480	20dBc	Pass
3DH5	00	2402	20dBc	Pass
3DH5	39	2441	20dBc	Pass
3DH5	78	2480	20dBc	Pass

DH5 Conducted Spurious Emissions


Channel 00 (2402MHz)



Channel 39 (2441MHz)




Channel 78 (2480MHz)

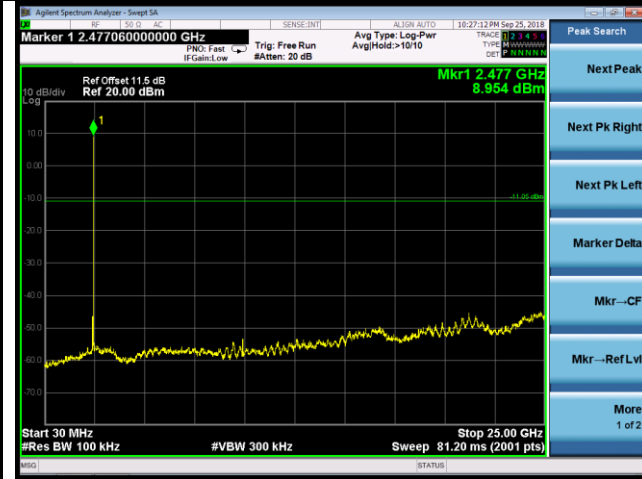

2DH5 Conducted Spurious Emissions


Channel 00 (2402MHz)

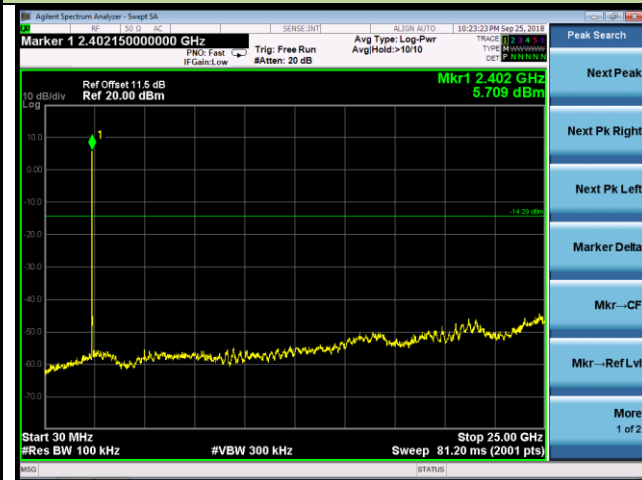

Channel 39 (2441MHz)




Channel 78 (2480MHz)

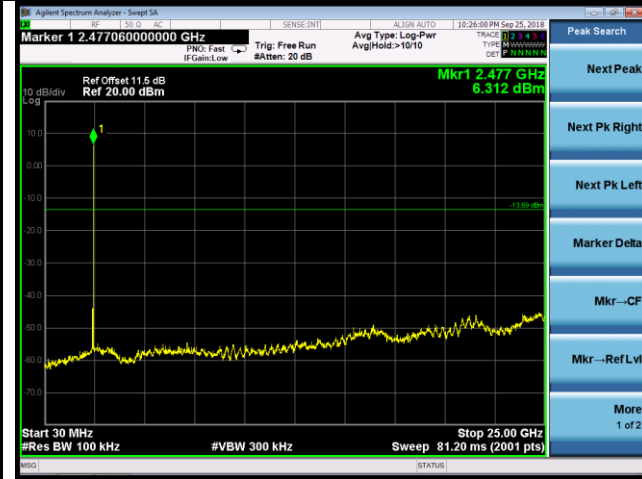

3DH5 Conducted Spurious Emissions


Channel 00 (2402MHz)

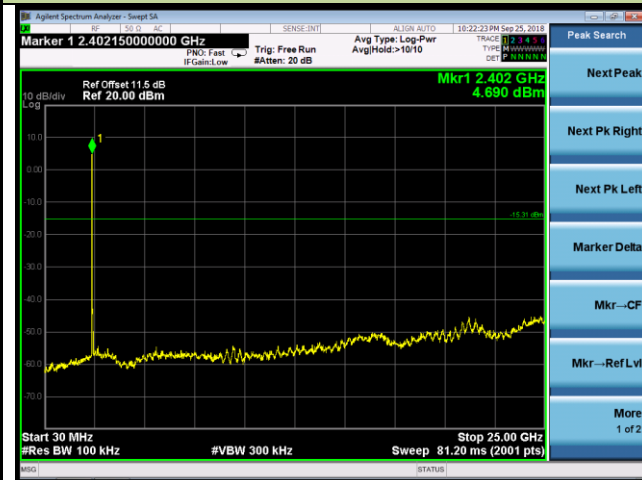

Channel 39 (2441MHz)



Channel 78 (2480MHz)

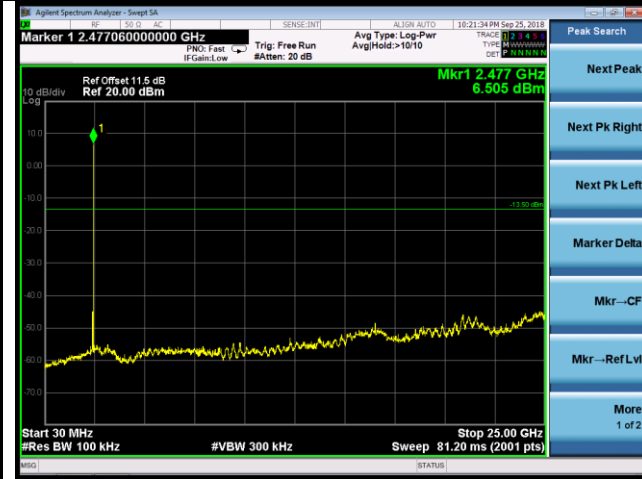

7.9. Radiated Spurious Emission Measurement

7.9.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.9.2. Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

7.9.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.


If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.9.4. Test Setup


9kHz ~ 30MHz Test Setup:

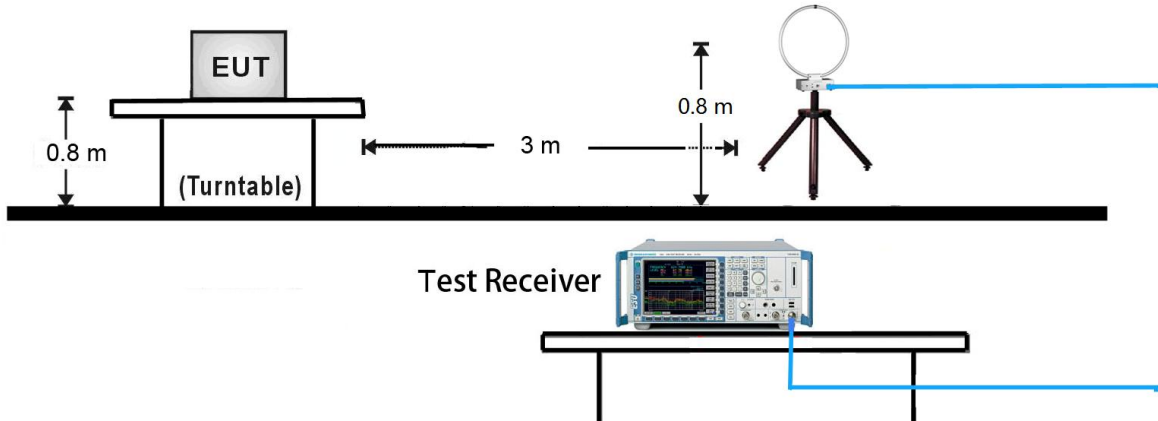


30MHz ~ 1GHz Test Setup:

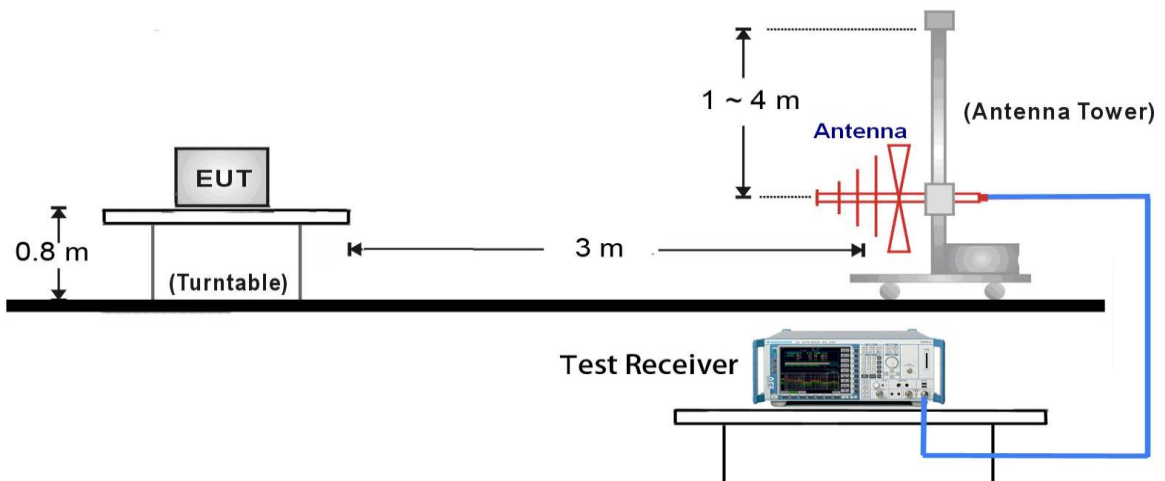

1GHz ~ 18GHz Test Setup:

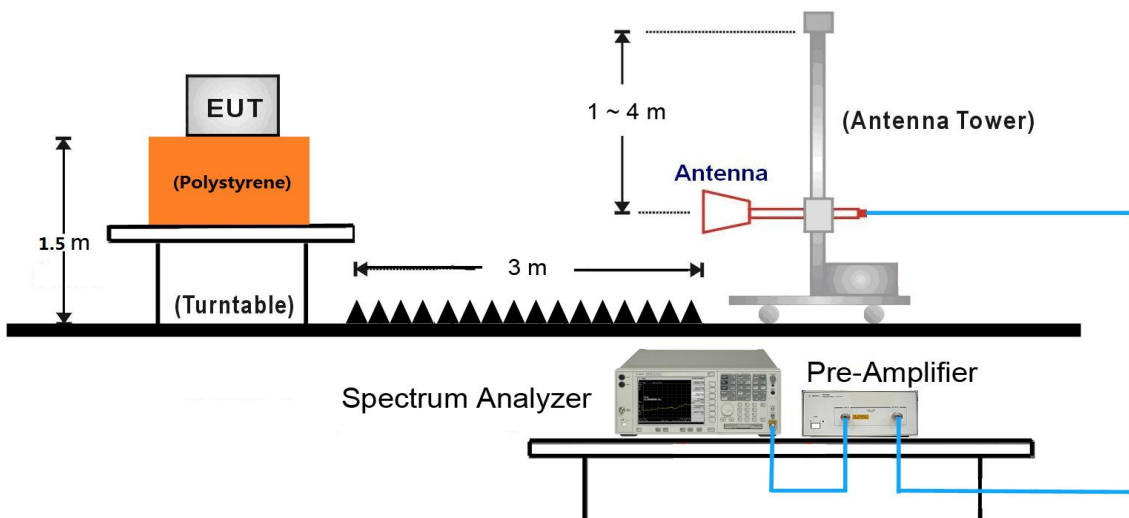

18GHz ~25GHz Test Setup:

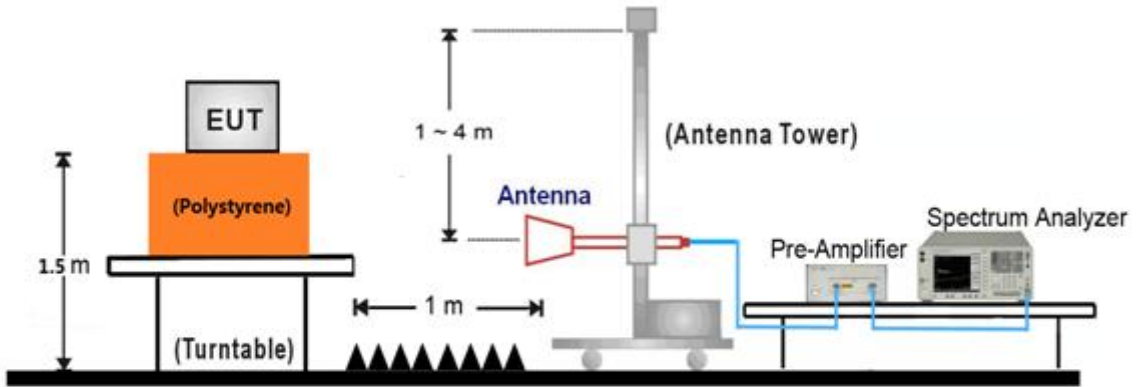

7.9.5. Test Result

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	25°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC2	Test Date	2018/09/18
Test Mode:	DH5	Test Channel:	00
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4179.0	36.7	3.6	40.3	74.0	-33.7	Peak	Horizontal
*	5012.0	36.6	5.8	42.4	74.0	-31.6	Peak	Horizontal
*	6202.0	34.9	8.6	43.5	85.0	-41.5	Peak	Horizontal
	7961.5	33.1	14.8	47.9	85.0	-37.1	Peak	Horizontal
	4102.5	36.6	3.1	39.7	74.0	-34.3	Peak	Vertical
	5003.5	35.1	5.8	40.9	74.0	-33.1	Peak	Vertical
*	6193.5	35.6	8.6	44.2	85.0	-40.8	Peak	Vertical
*	7868.0	33.2	14.6	47.8	85.0	-37.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (105.0dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	25°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC2	Test Date	2018/09/18
Test Mode:	DH5	Test Channel:	39
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	3966.5	37.9	2.5	40.4	74.0	-33.6	Peak	Horizontal
*	4842.0	34.9	5.6	40.5	74.0	-33.5	Peak	Horizontal
*	6618.5	34.6	10.7	45.3	85.8	-40.5	Peak	Horizontal
	7851.0	33.0	14.5	47.5	85.8	-38.3	Peak	Horizontal
	3966.5	37.9	2.5	40.4	74.0	-33.6	Peak	Vertical
	5114.0	35.9	6.1	42.0	74.0	-32.0	Peak	Vertical
*	6618.5	34.6	10.7	45.3	85.8	-40.5	Peak	Vertical
*	7970.0	32.9	14.8	47.7	85.8	-38.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (105.8dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	25°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC2	Test Date	2018/09/18
Test Mode:	DH5	Test Channel:	78
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	3958.0	37.8	2.5	40.3	74.0	-33.7	Peak	Horizontal
*	5020.5	35.6	5.9	41.5	74.0	-32.5	Peak	Horizontal
*	5666.5	35.6	7.0	42.6	84.8	-42.2	Peak	Horizontal
	7851.0	32.8	14.5	47.3	84.8	-37.5	Peak	Horizontal
	3966.5	37.2	2.5	39.7	74.0	-34.3	Peak	Vertical
	4604.0	35.9	4.9	40.8	74.0	-33.2	Peak	Vertical
*	6193.5	34.8	8.6	43.4	84.8	-41.4	Peak	Vertical
*	7859.5	33.0	14.5	47.5	84.8	-37.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (104.8dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	25°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC2	Test Date	2018/09/18
Test Mode:	2DH5	Test Channel:	00
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4153.5	36.2	3.5	39.7	74.0	-34.3	Peak	Horizontal
*	4646.5	36.5	5.1	41.6	74.0	-32.4	Peak	Horizontal
*	6465.5	33.8	10.0	43.8	84.7	-40.9	Peak	Horizontal
	7885.0	32.8	14.6	47.4	84.7	-37.3	Peak	Horizontal
	4187.5	36.5	3.6	40.1	74.0	-33.9	Peak	Vertical
	5088.5	35.0	6.2	41.2	74.0	-32.8	Peak	Vertical
*	6193.5	36.3	8.6	44.9	84.7	-39.8	Peak	Vertical
*	7902.0	32.6	14.6	47.2	84.7	-37.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (104.7dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	25°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC2	Test Date	2018/09/18
Test Mode:	2DH5	Test Channel:	39
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	3949.5	37.2	2.4	39.6	74.0	-34.4	Peak	Horizontal
*	5088.5	36.2	6.2	42.4	74.0	-31.6	Peak	Horizontal
*	6414.5	34.1	9.6	43.7	84.9	-41.2	Peak	Horizontal
	7876.5	32.8	14.6	47.4	84.9	-37.5	Peak	Horizontal
	4000.5	37.6	2.6	40.2	74.0	-33.8	Peak	Vertical
	4910.0	35.8	5.6	41.4	74.0	-32.6	Peak	Vertical
*	6457.0	34.3	10.0	44.3	84.9	-40.6	Peak	Vertical
*	7842.5	32.8	14.5	47.3	84.9	-37.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (104.9dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	25°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC2	Test Date	2018/09/18
Test Mode:	2DH5	Test Channel:	78
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	3949.5	37.3	2.4	39.7	74.0	-34.3	Peak	Horizontal
*	4680.5	35.6	5.4	41.0	74.0	-33.0	Peak	Horizontal
*	6712.0	34.0	10.7	44.7	83.8	-39.1	Peak	Horizontal
	7876.5	33.0	14.6	47.6	83.8	-36.2	Peak	Horizontal
	3966.5	37.0	2.5	39.5	74.0	-34.5	Peak	Vertical
	5088.5	36.1	6.2	42.3	74.0	-31.7	Peak	Vertical
*	6729.0	34.1	10.7	44.8	83.8	-39.0	Peak	Vertical
*	7987.0	32.3	14.8	47.1	83.8	-36.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (103.8dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	25°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC2	Test Date	2018/09/18
Test Mode:	3DH5	Test Channel:	00
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4179.0	36.6	3.6	40.2	74.0	-33.8	Peak	Horizontal
*	4672.0	36.0	5.4	41.4	74.0	-32.6	Peak	Horizontal
*	6270.0	34.7	9.0	43.7	85.1	-41.4	Peak	Horizontal
	7851.0	33.5	14.5	48.0	85.1	-37.1	Peak	Horizontal
	4170.5	36.0	3.6	39.6	74.0	-34.4	Peak	Vertical
	4893.0	35.1	5.5	40.6	74.0	-33.4	Peak	Vertical
*	5615.5	36.1	6.7	42.8	85.1	-42.3	Peak	Vertical
*	7961.5	32.3	14.8	47.1	85.1	-38.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (105.1dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	25°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC2	Test Date	2018/09/18
Test Mode:	3DH5	Test Channel:	39
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	3949.5	37.5	2.4	39.9	74.0	-34.1	Peak	Horizontal
*	5063.0	35.4	6.0	41.4	74.0	-32.6	Peak	Horizontal
*	6703.5	34.4	10.7	45.1	85.8	-40.7	Peak	Horizontal
	7910.5	31.1	14.6	45.7	85.8	-40.1	Peak	Horizontal
	3975.0	37.5	2.6	40.1	74.0	-33.9	Peak	Vertical
	4672.0	36.2	5.4	41.6	74.0	-32.4	Peak	Vertical
*	5615.5	35.6	6.7	42.3	85.8	-43.5	Peak	Vertical
*	7868.0	33.0	14.6	47.6	85.8	-38.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (105.8dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	25°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC2	Test Date	2018/09/18
Test Mode:	3DH5	Test Channel:	78
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4170.5	36.0	3.6	39.6	74.0	-34.4	Peak	Horizontal
*	5114.0	36.7	6.1	42.8	74.0	-31.2	Peak	Horizontal
*	6440.0	33.8	9.9	43.7	84.2	-40.5	Peak	Horizontal
	7987.0	30.5	14.8	45.3	84.2	-38.9	Peak	Horizontal
	3966.5	37.5	2.5	40.0	74.0	-34.0	Peak	Vertical
	5097.0	36.8	6.2	43.0	74.0	-31.0	Peak	Vertical
*	6491.0	33.8	10.2	44.0	84.2	-40.2	Peak	Vertical
*	7834.0	33.5	14.5	48.0	84.2	-36.2	Peak	Vertical


Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (104.2dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Worst Case of Radiated Emission below 1GHz:

Site: AC2	Time: 2018/09/27 - 15:01
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: VULB 9168 _20-2000MHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: There is the worst case within frequency range 30MHz~1GHz.	

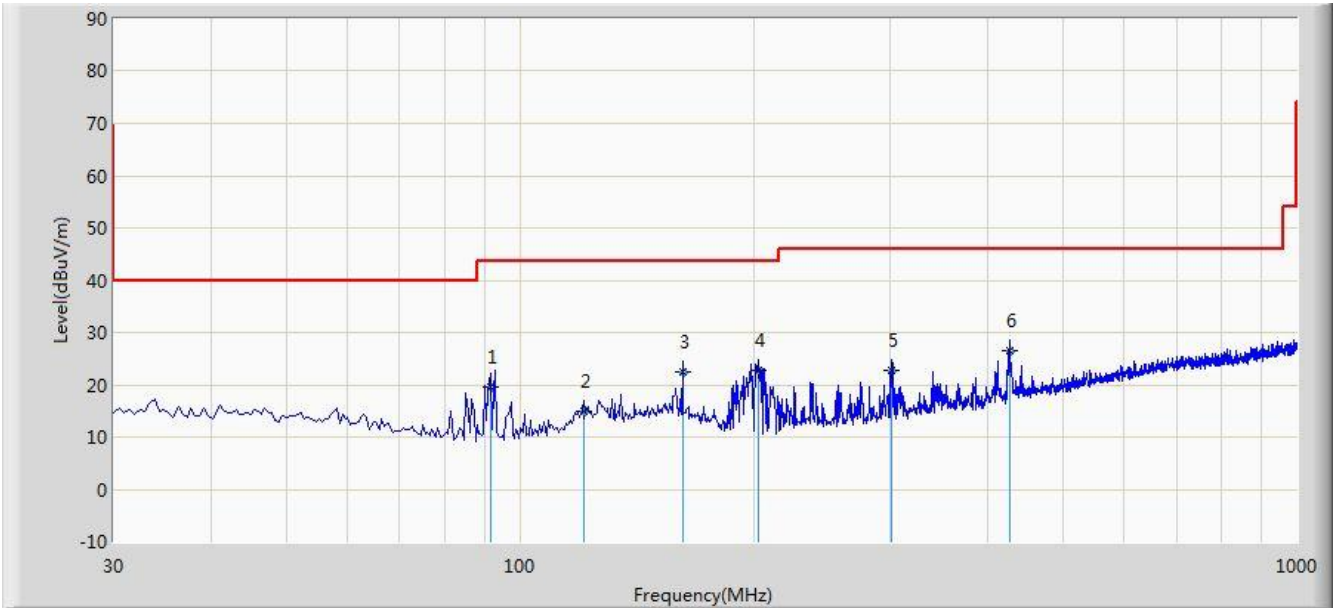


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			91.595	19.612	9.177	-23.888	43.500	10.435	QP
2			120.695	14.824	1.549	-28.676	43.500	13.275	QP
3			161.920	22.386	7.256	-21.114	43.500	15.130	QP
4			202.660	22.898	11.648	-20.602	43.500	11.249	QP
5			300.630	22.691	8.276	-23.309	46.000	14.414	QP
6		*	427.700	26.417	9.068	-19.583	46.000	17.349	QP

Note 1: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

Site: AC2	Time: 2018/09/27 - 15:03
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: VULB 9168 _20-2000MHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: There is the worst case within frequency range 30MHz~1GHz.	

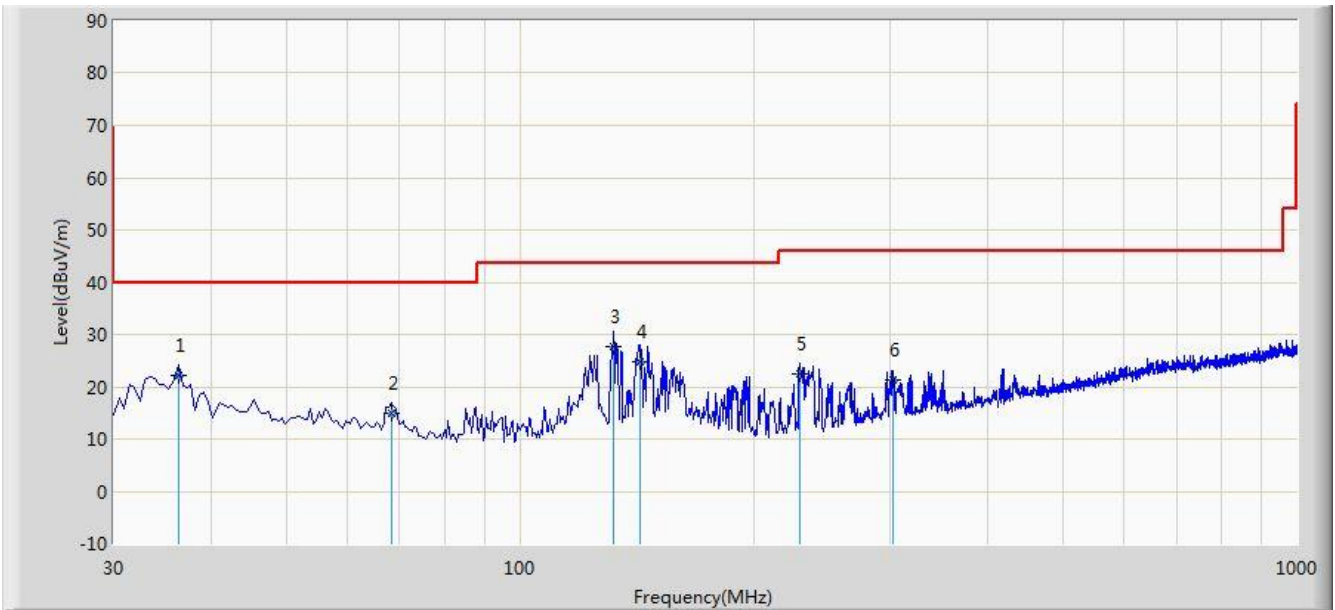

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			36.305	22.244	8.119	-17.756	40.000	14.125	QP
2			68.315	14.812	2.910	-25.188	40.000	11.903	QP
3		*	131.850	27.541	13.568	-15.959	43.500	13.973	QP
4			142.520	24.882	10.116	-18.618	43.500	14.766	QP
5			228.850	22.349	9.812	-23.651	46.000	12.537	QP
6			301.600	21.183	6.743	-24.817	46.000	14.440	QP

Note 1: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

7.10. Radiated Restricted Band Edge Measurement

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.10.1. Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

7.10.2. Test Setting


Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.10.3. Test Setup

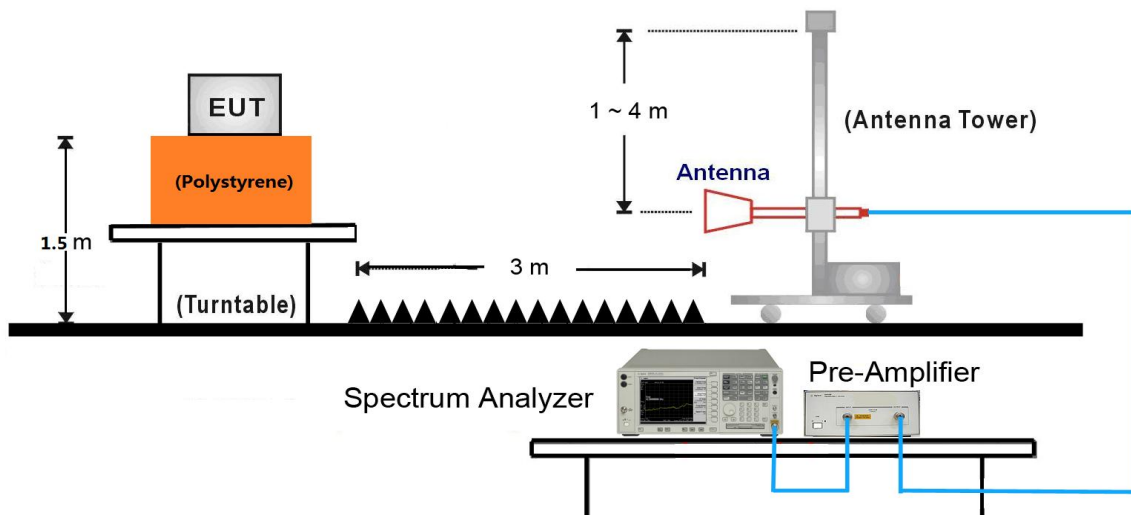

7.10.4. Test Result

Site: AC2	Time: 2018/08/14 - 10:20
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at Channel 2402MHz	

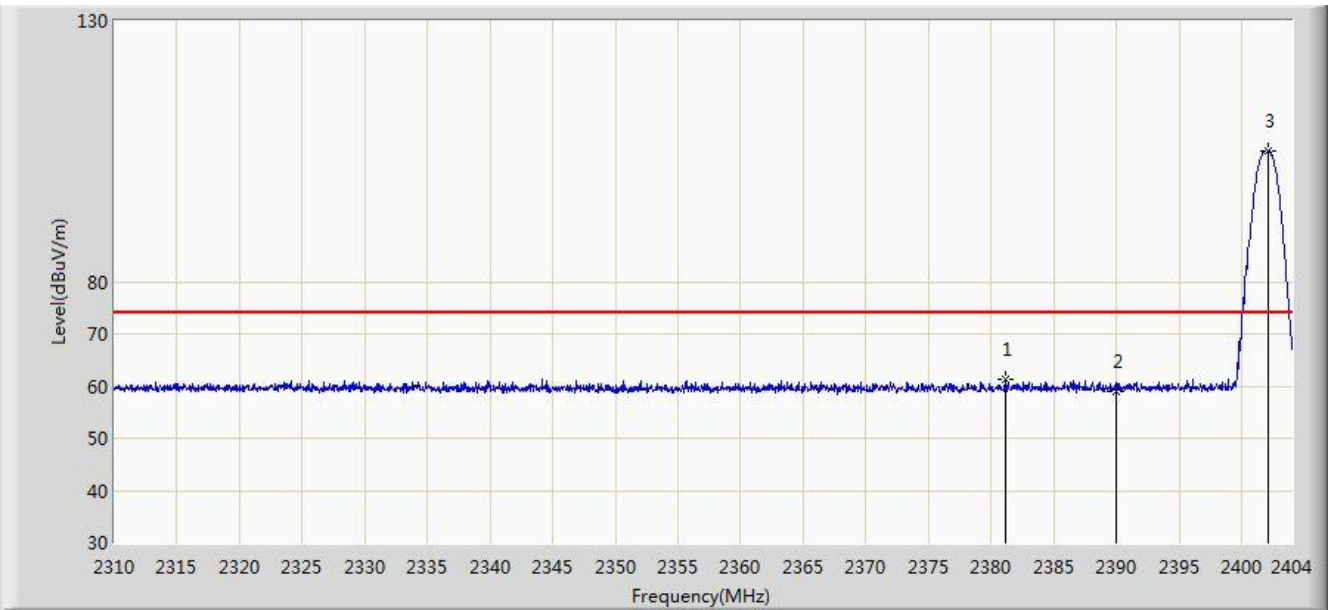


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2381.205	61.396	28.806	-12.604	74.000	32.590	PK
2			2390.000	59.126	26.551	-14.874	74.000	32.575	PK
3		*	2402.120	105.007	72.448	N/A	N/A	32.558	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/14 - 10:25
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at Channel 2402MHz	

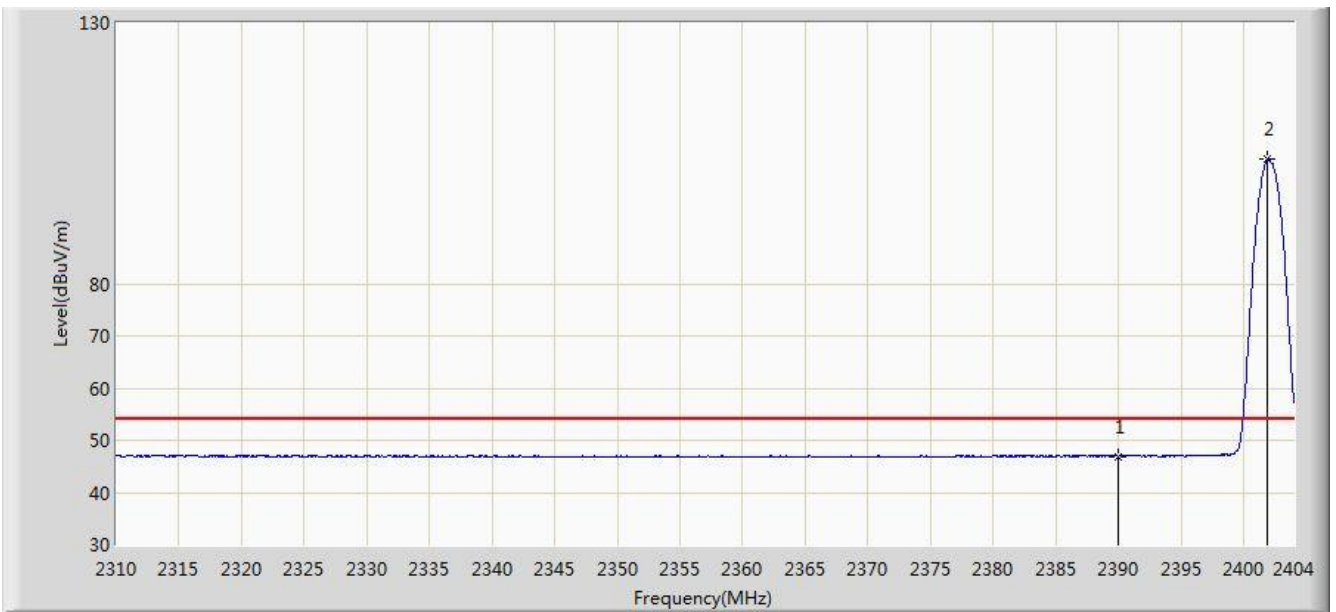


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.908	14.333	-7.092	54.000	32.575	AV
2		*	2401.932	103.802	71.243	N/A	N/A	32.559	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/14 - 10:26
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at Channel 2402MHz	

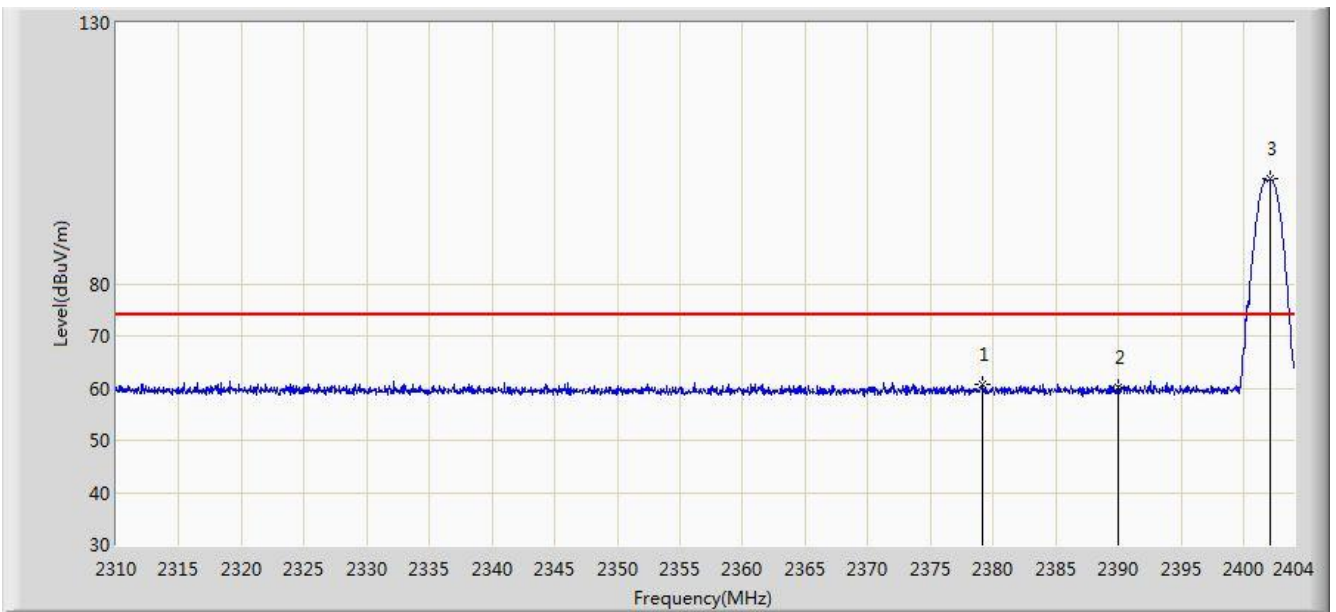


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2379.090	60.596	28.002	-13.404	74.000	32.594	PK
2			2390.000	60.264	27.689	-13.736	74.000	32.575	PK
3		*	2402.120	100.046	67.487	N/A	N/A	32.558	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/14 - 10:27
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at Channel 2402MHz	

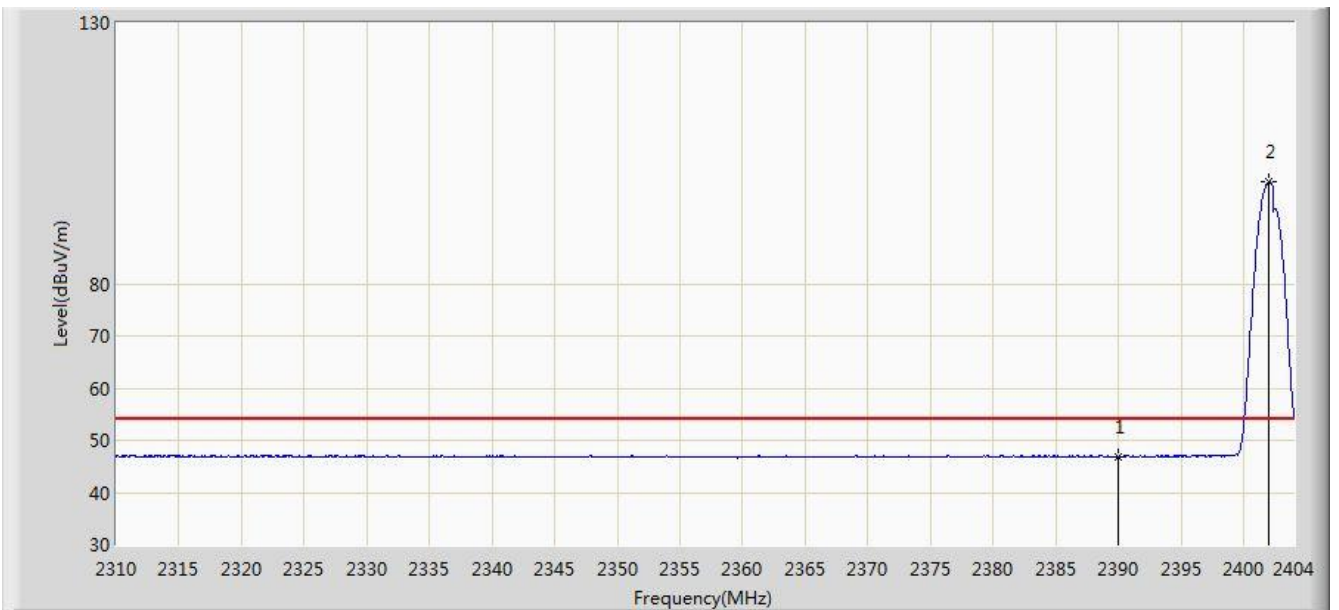


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.875	14.300	-7.125	54.000	32.575	AV
2		*	2401.979	99.472	66.913	N/A	N/A	32.559	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/14 - 10:28
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at Channel 2480MHz	

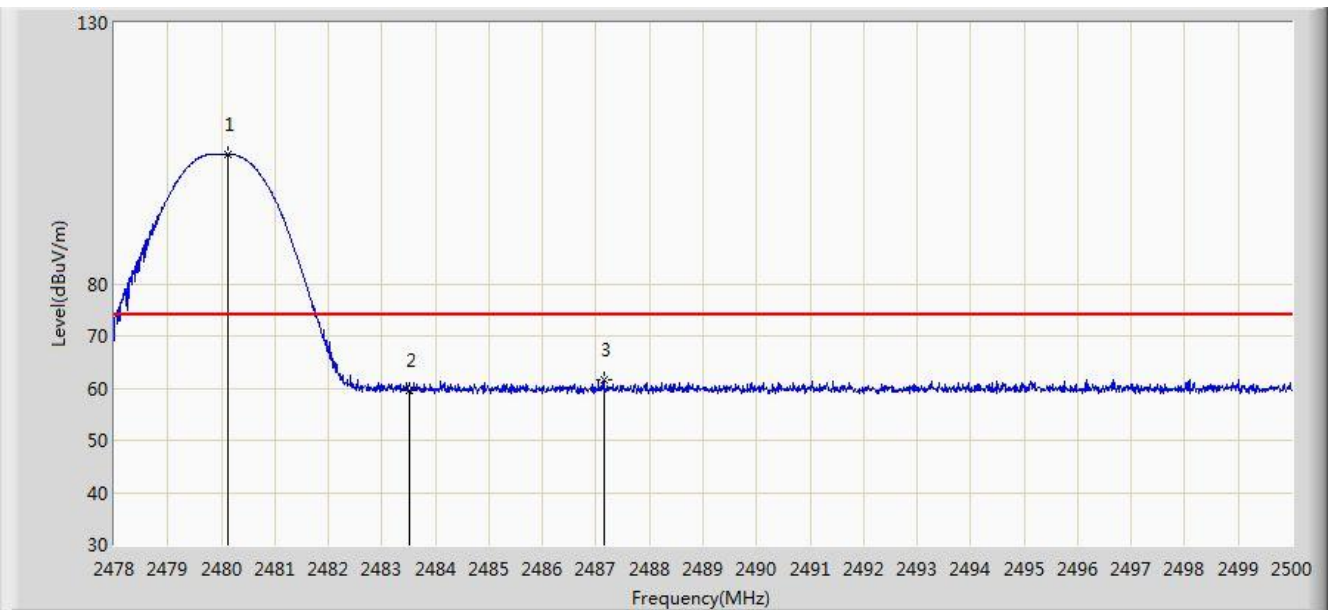


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.112	104.820	72.233	N/A	N/A	32.587	PK
2			2483.500	59.657	27.061	-14.343	74.000	32.596	PK
3			2487.141	61.734	29.129	-12.266	74.000	32.605	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/14 - 10:55
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at Channel 2480MHz	

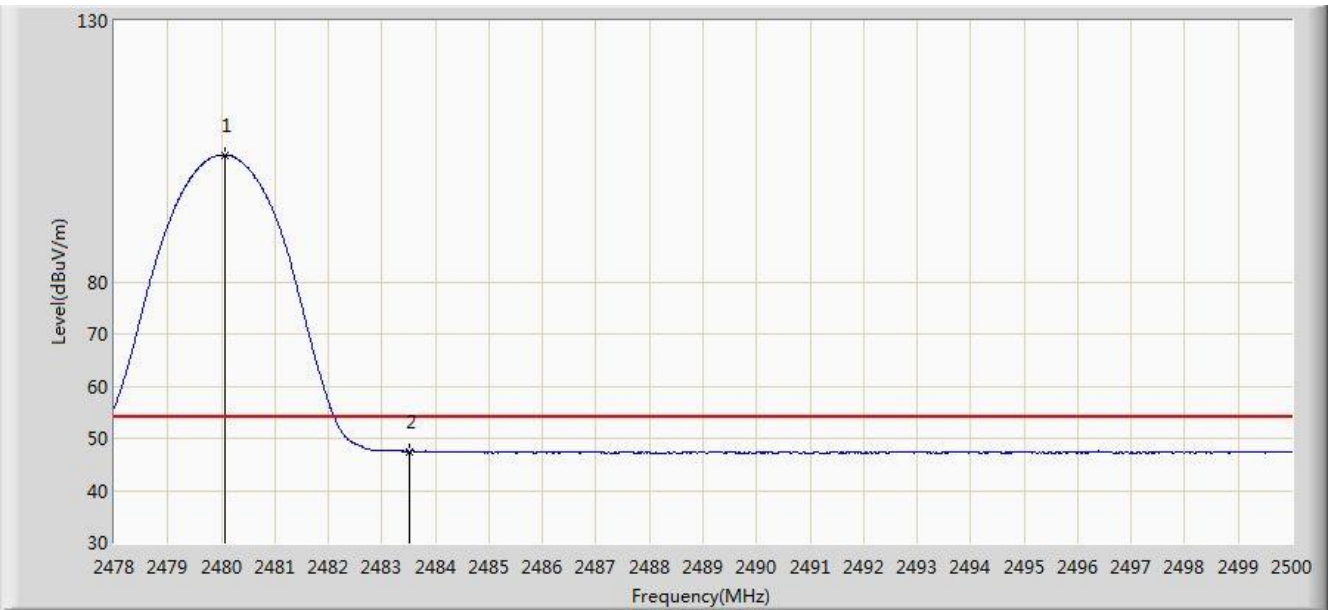


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.057	104.336	71.749	N/A	N/A	32.587	AV
2			2483.500	47.489	14.893	-6.511	54.000	32.596	AV
3			3483.500	47.350	12.426	-6.650	54.000	34.923	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/14 - 10:56
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at Channel 2480MHz	

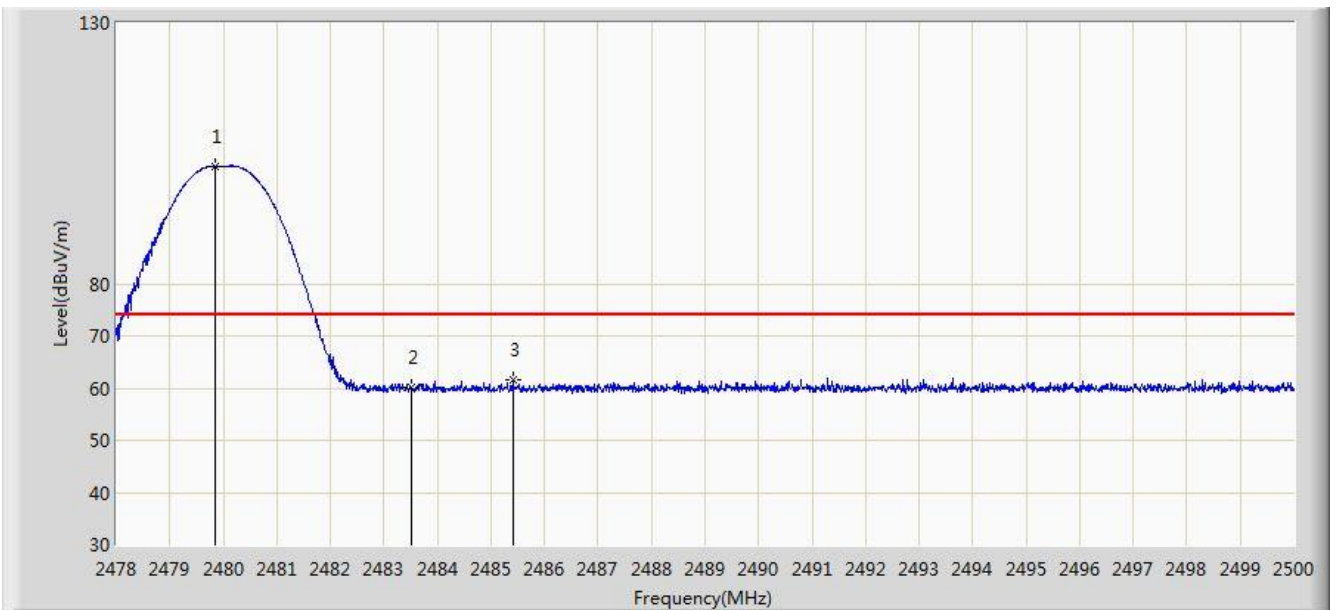

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.848	102.601	70.014	N/A	N/A	32.587	PK
2			2483.500	60.031	27.435	-13.969	74.000	32.596	PK
3			2485.414	61.717	29.116	-12.283	74.000	32.601	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/14 - 10:58
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at Channel 2480MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.046	101.681	69.094	N/A	N/A	32.587	AV
2			2483.500	47.450	14.854	-6.550	54.000	32.596	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/14 - 10:59
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at Channel 2402MHz	

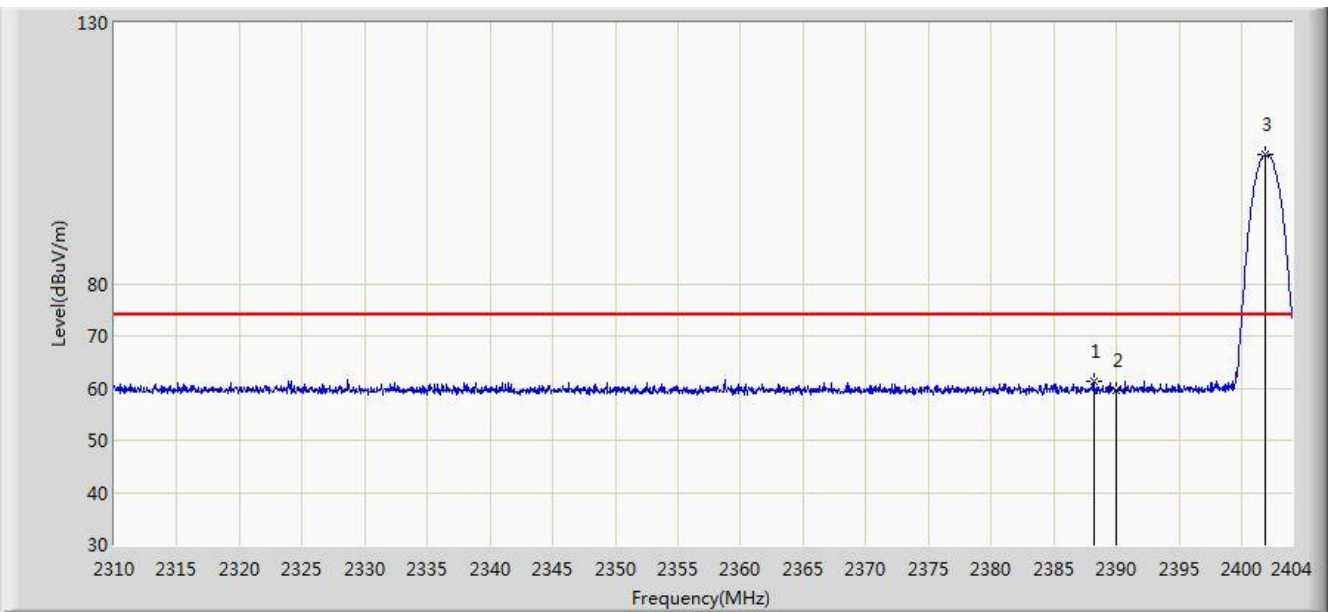


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.161	61.396	28.818	-12.604	74.000	32.578	PK
2			2390.000	59.444	26.869	-14.556	74.000	32.575	PK
3		*	2401.885	104.686	72.127	N/A	N/A	32.559	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/14 - 11:03
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at Channel 2402MHz	

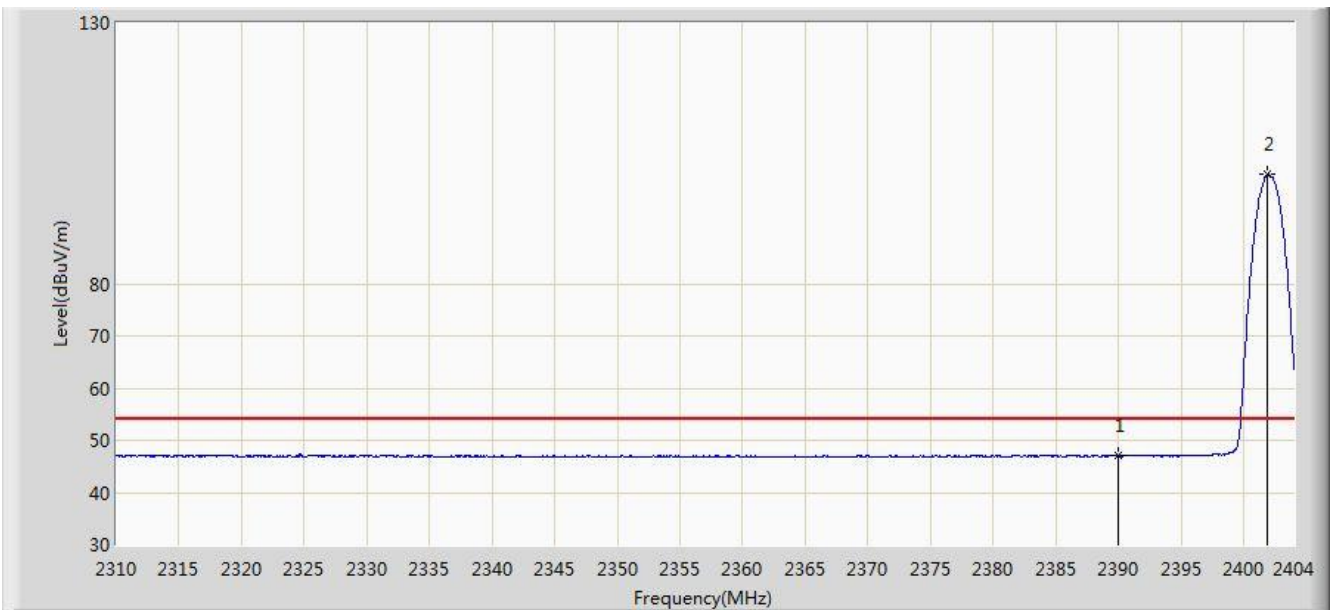


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.994	14.419	-7.006	54.000	32.575	AV
2		*	2401.885	100.978	68.419	N/A	N/A	32.559	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/14 - 11:04
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at Channel 2402MHz	

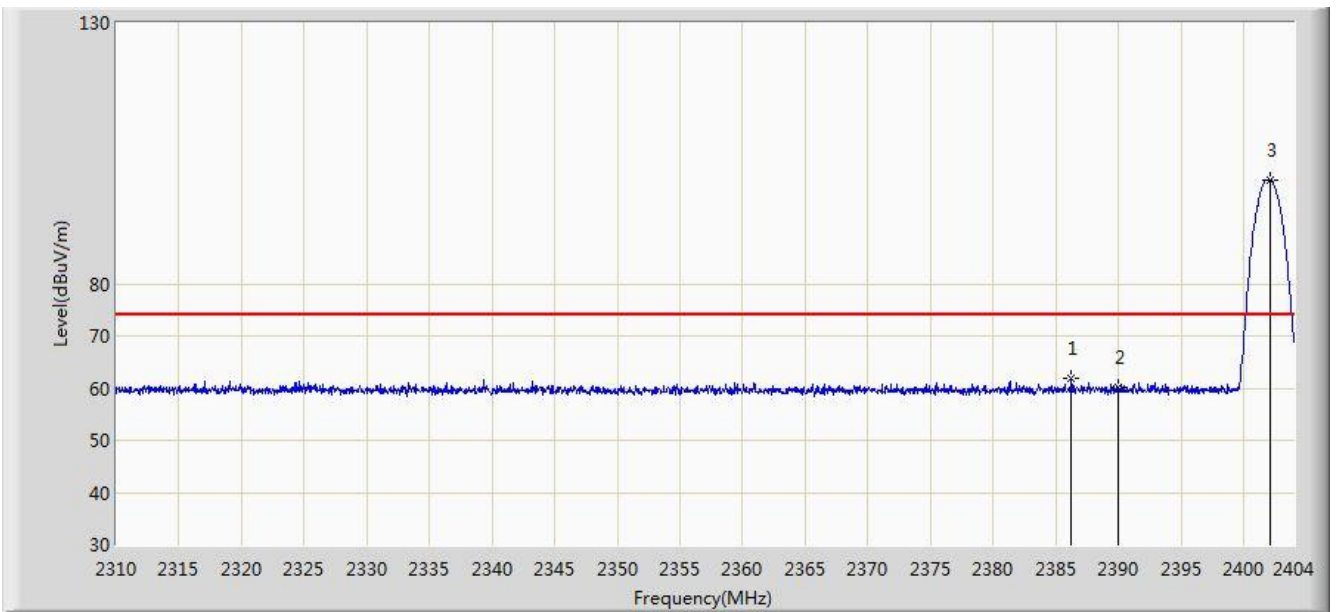


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2386.234	62.027	29.446	-11.973	74.000	32.582	PK
2			2390.000	60.164	27.589	-13.836	74.000	32.575	PK
3		*	2402.073	99.828	67.269	N/A	N/A	32.558	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/14 - 11:06
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at Channel 2402MHz	

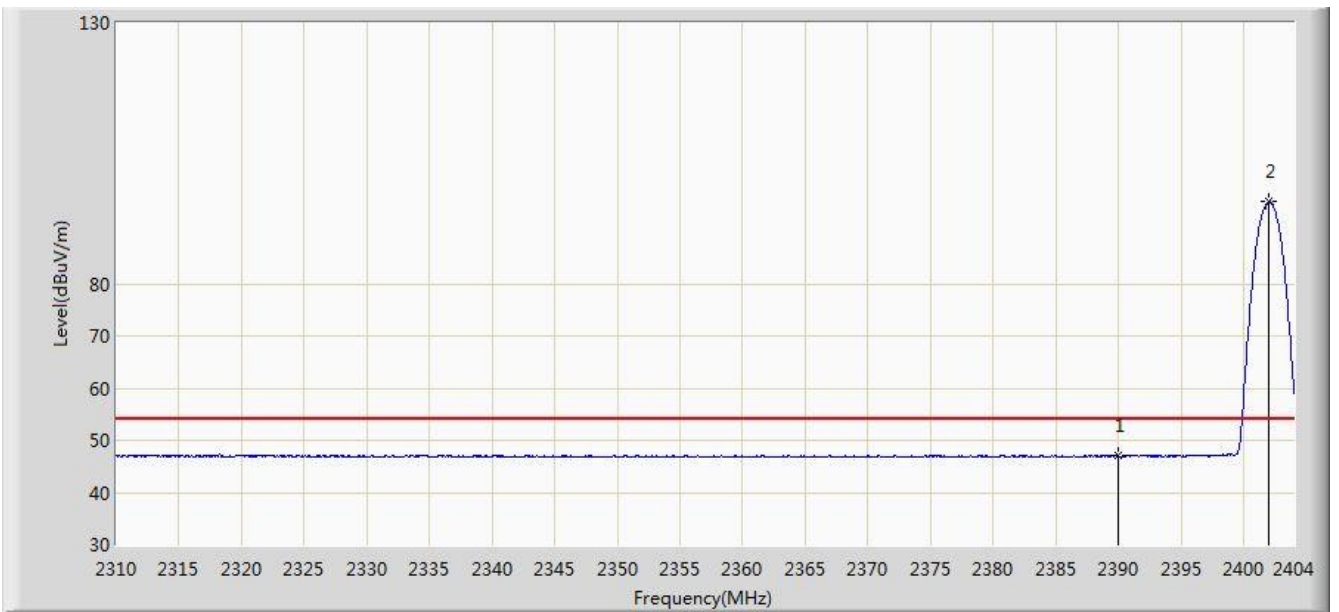


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	47.040	14.465	-6.960	54.000	32.575	AV
2		*	2402.026	95.685	63.126	N/A	N/A	32.559	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/14 - 11:06
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at Channel 2480MHz	

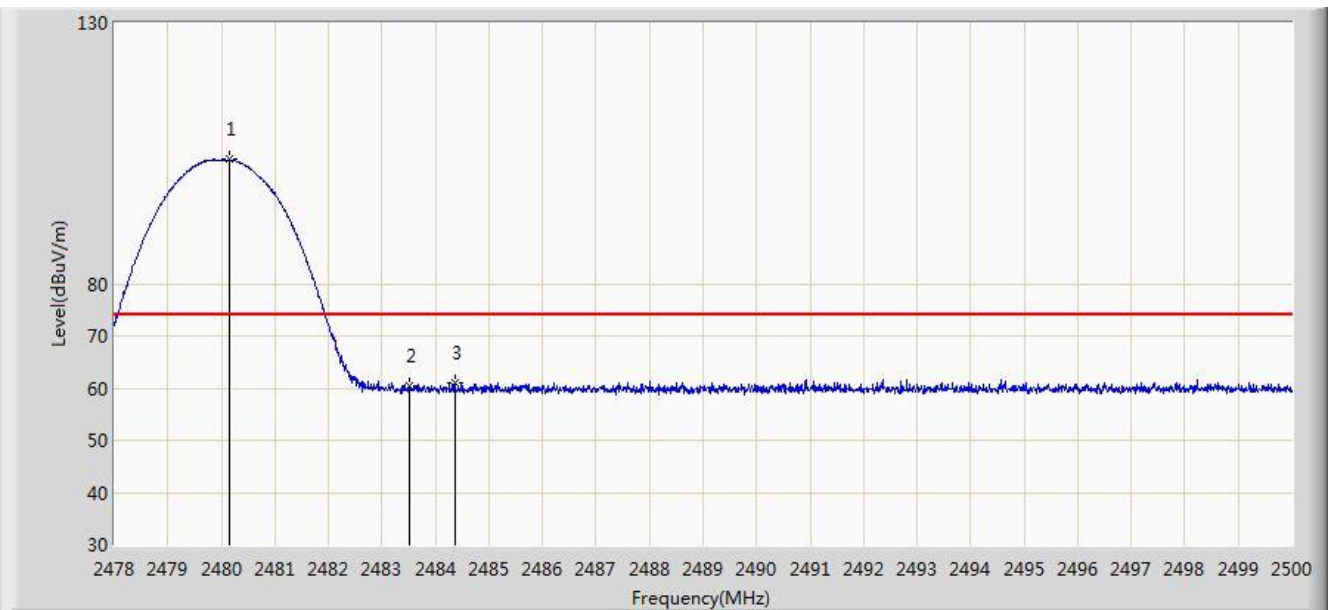


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.145	103.772	71.185	N/A	N/A	32.588	PK
2			2483.500	60.501	27.905	-13.499	74.000	32.596	PK
3			2484.369	61.059	28.461	-12.941	74.000	32.598	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/14 - 11:08
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at Channel 2480MHz	

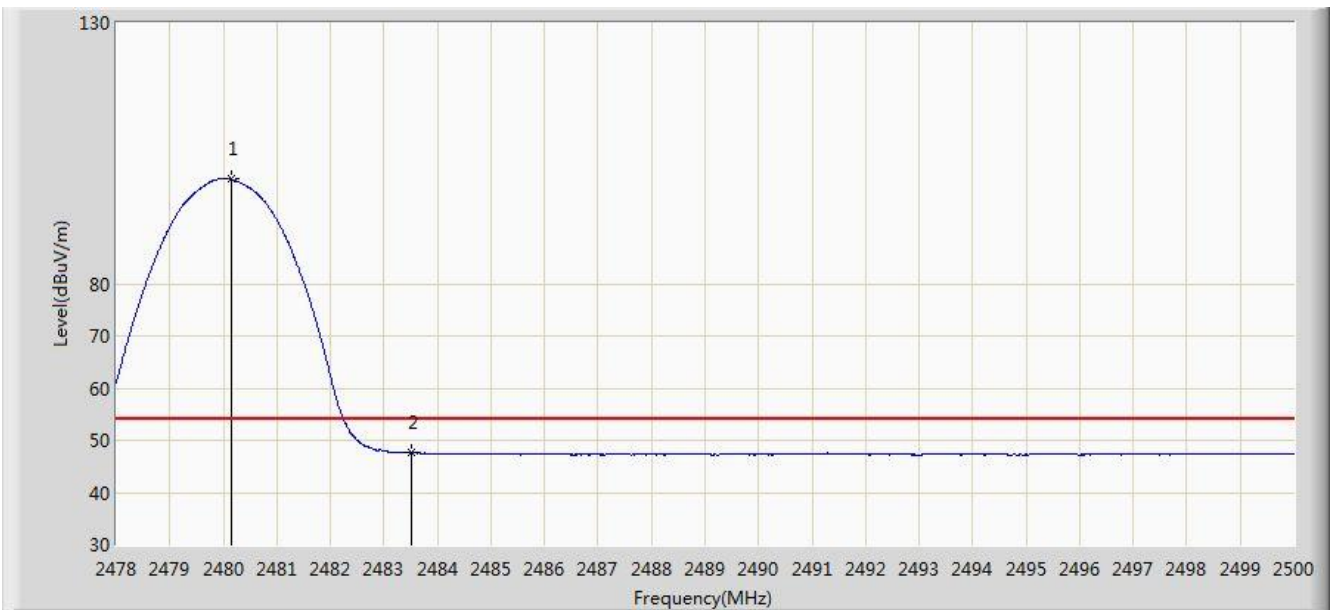


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.145	100.034	67.447	N/A	N/A	32.588	AV
2			2483.500	47.659	15.063	-6.341	54.000	32.596	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/14 - 11:09
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at Channel 2480MHz	

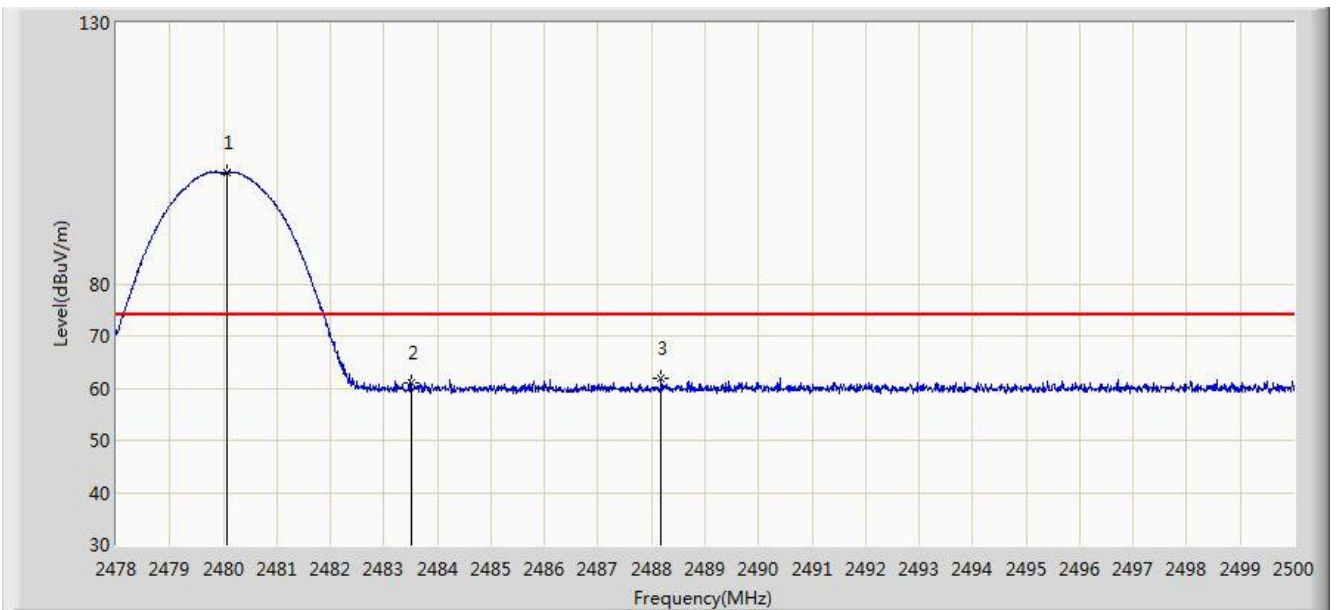


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.079	101.446	68.859	N/A	N/A	32.587	PK
2			2483.500	60.932	28.336	-13.068	74.000	32.596	PK
3			2488.186	61.933	29.325	-12.067	74.000	32.607	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/14 - 11:10
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at Channel 2480MHz	

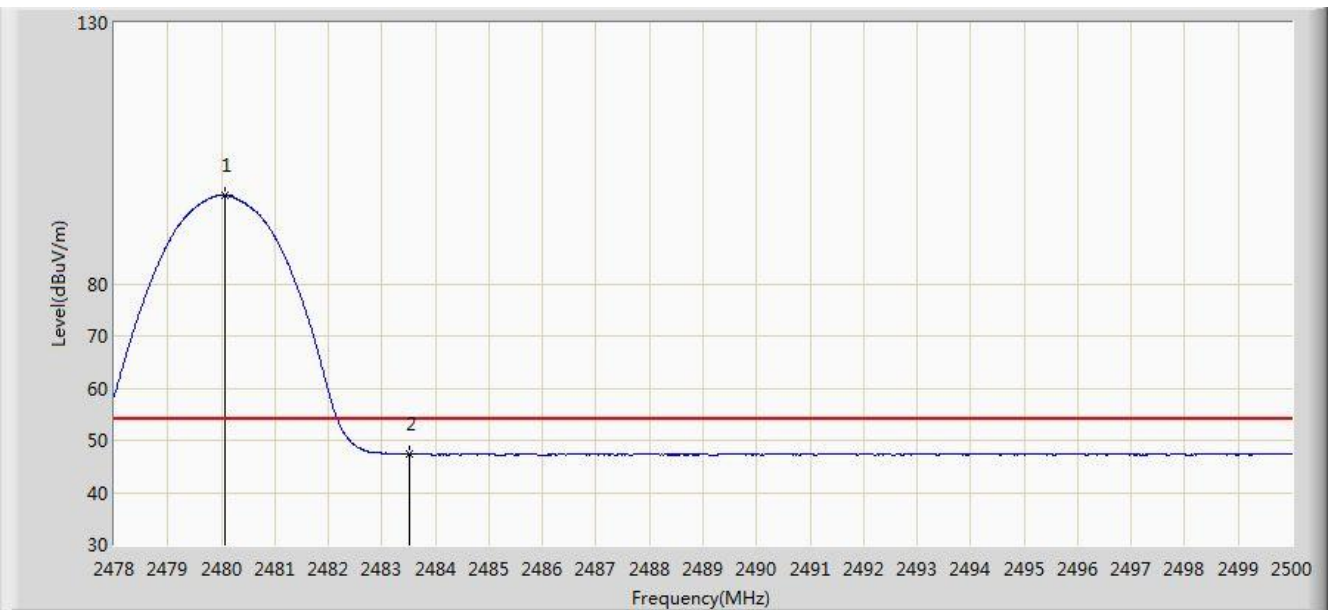


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.079	96.929	64.342	N/A	N/A	32.587	AV
2			2483.500	47.313	14.717	-6.687	54.000	32.596	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/14 - 11:11
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at Channel 2402MHz	

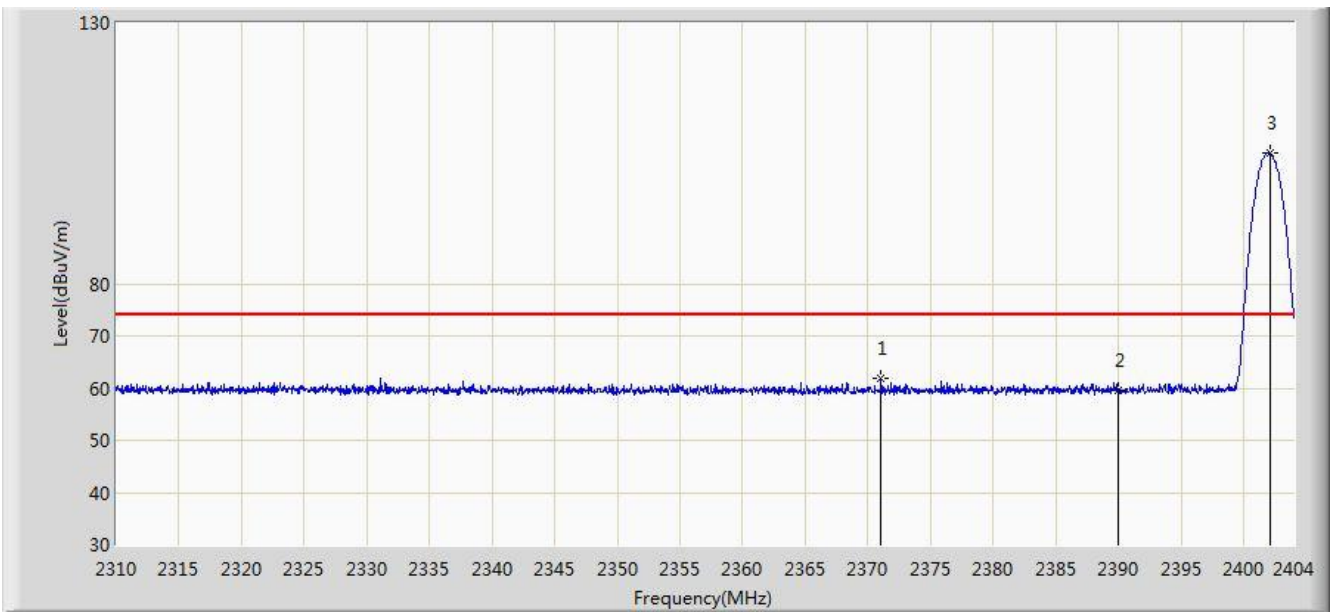


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2371.053	61.990	29.384	-12.010	74.000	32.606	PK
2			2390.000	59.689	27.114	-14.311	74.000	32.575	PK
3		*	2402.073	105.052	72.493	N/A	N/A	32.558	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/14 - 11:14
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at Channel 2402MHz	

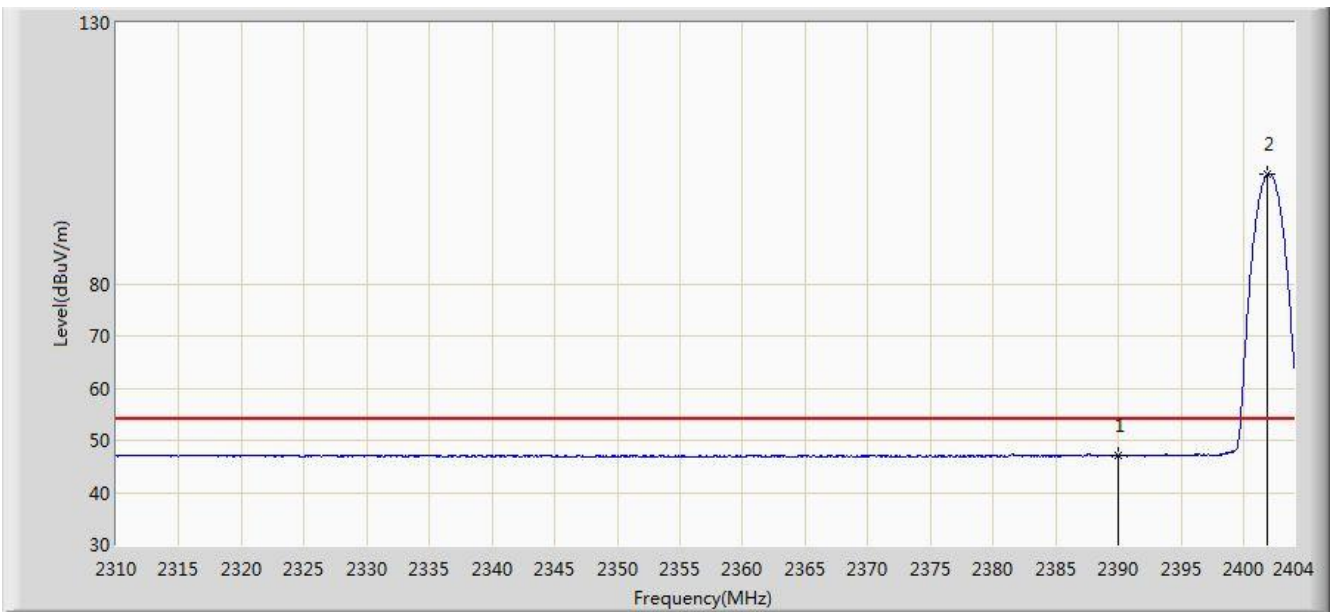


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	47.083	14.508	-6.917	54.000	32.575	AV
2		*	2401.932	100.985	68.426	N/A	N/A	32.559	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/14 - 11:14
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at Channel 2402MHz	

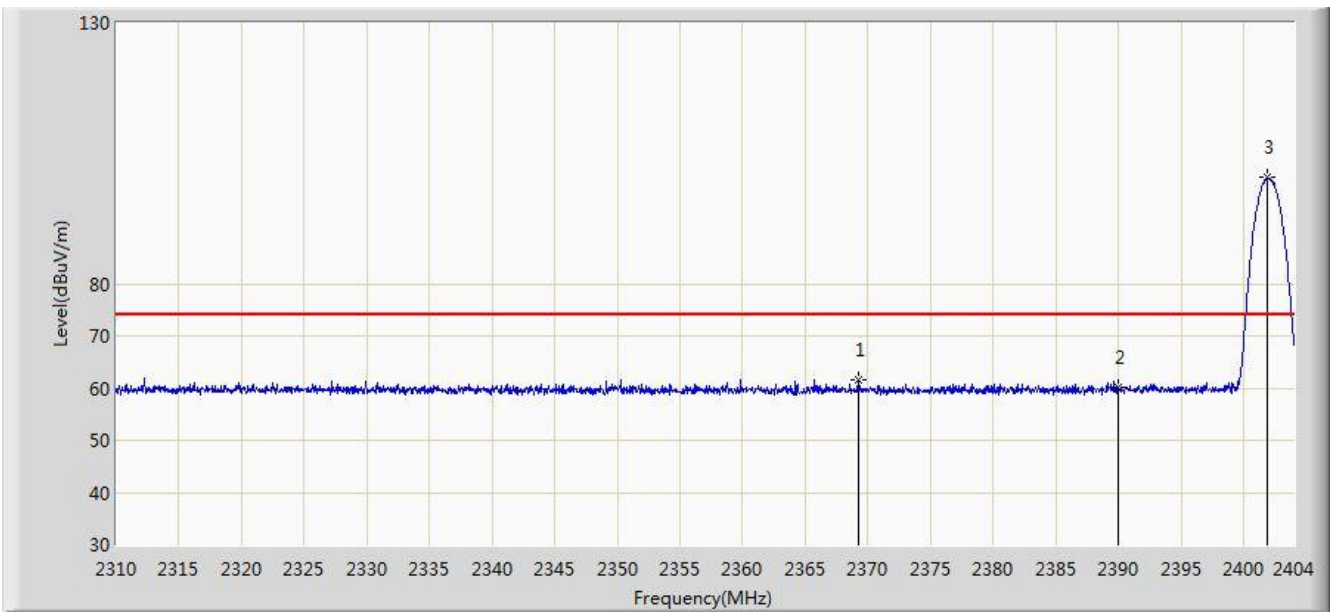


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2369.220	61.636	29.027	-12.364	74.000	32.609	PK
2			2390.000	60.136	27.561	-13.864	74.000	32.575	PK
3		*	2401.885	100.373	67.814	N/A	N/A	32.559	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/14 - 11:16
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at Channel 2402MHz	

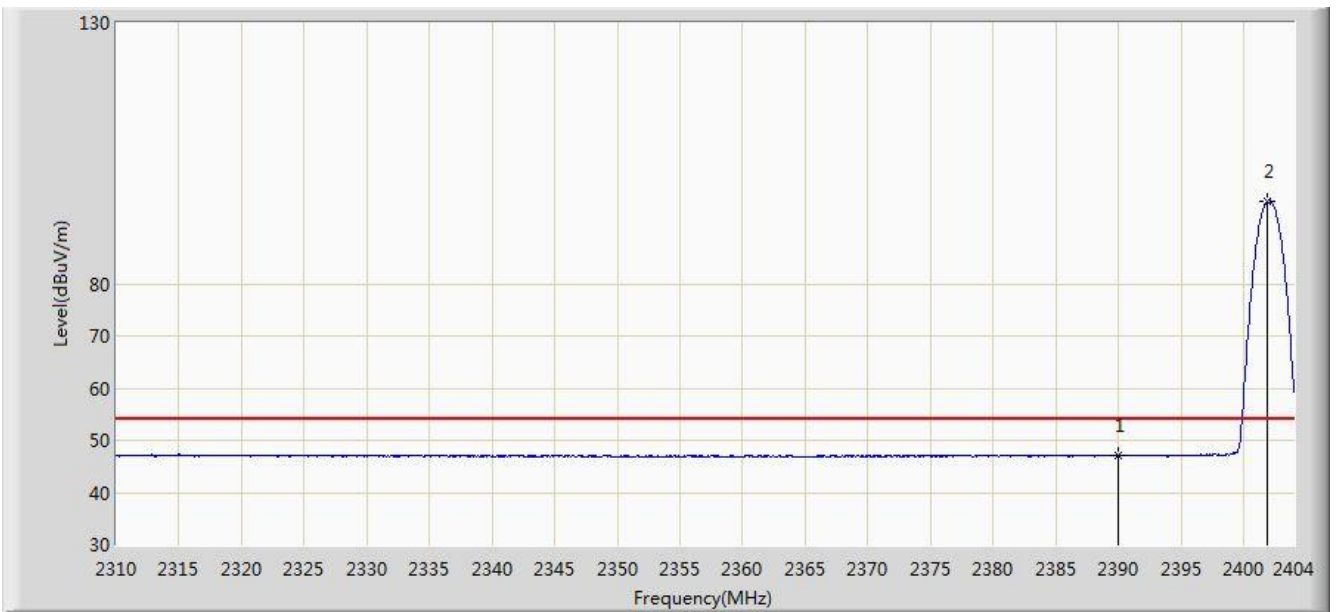


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	47.169	14.594	-6.831	54.000	32.575	AV
2		*	2401.838	95.685	63.126	N/A	N/A	32.559	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/14 - 11:17
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at Channel 2480MHz	

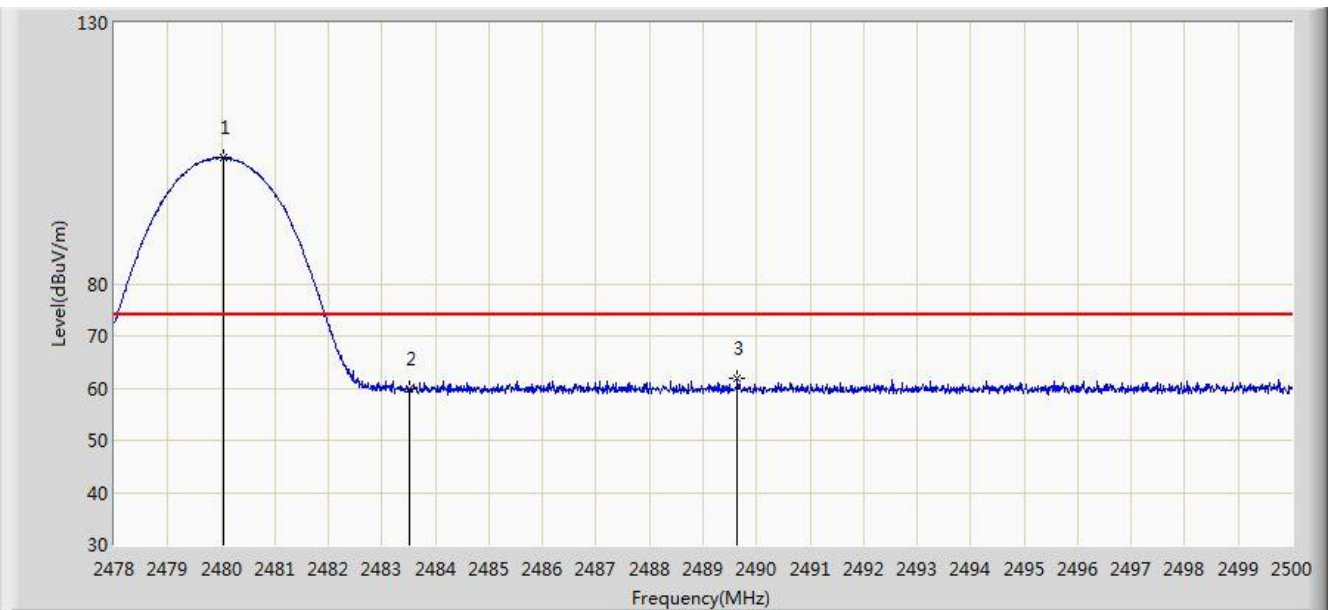


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.046	104.224	71.637	N/A	N/A	32.587	PK
2			2483.500	59.847	27.251	-14.153	74.000	32.596	PK
3			2489.638	61.958	29.347	-12.042	74.000	32.612	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/14 - 11:18
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at Channel 2480MHz	

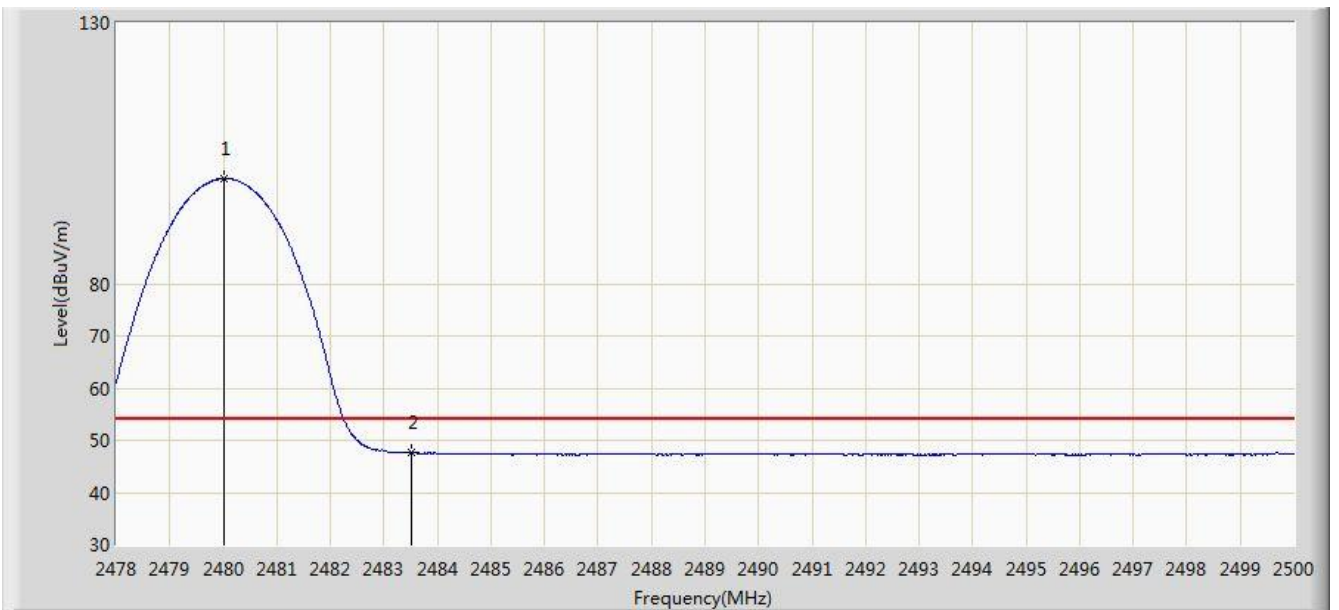


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.002	100.133	67.546	N/A	N/A	32.587	AV
2			2483.500	47.560	14.964	-6.440	54.000	32.596	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/14 - 11:18
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at Channel 2480MHz	

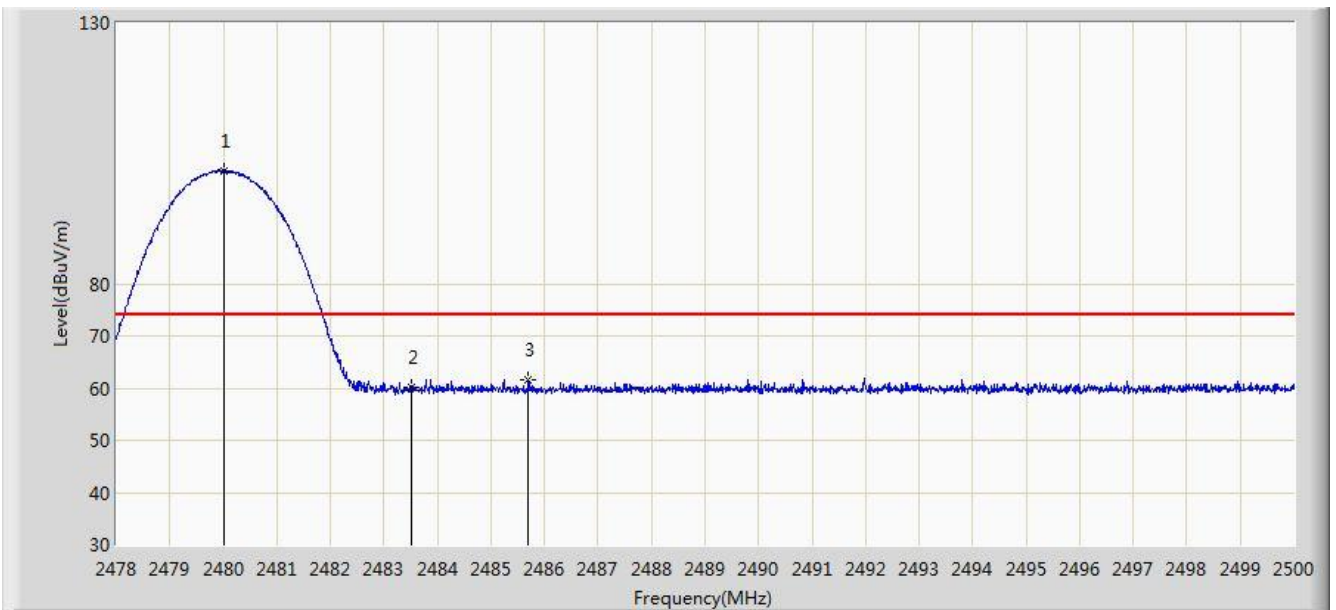


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.002	101.648	69.061	N/A	N/A	32.587	PK
2			2483.500	60.035	27.439	-13.965	74.000	32.596	PK
3			2485.700	61.565	28.964	-12.435	74.000	32.602	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/14 - 11:20
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at Channel 2480MHz	

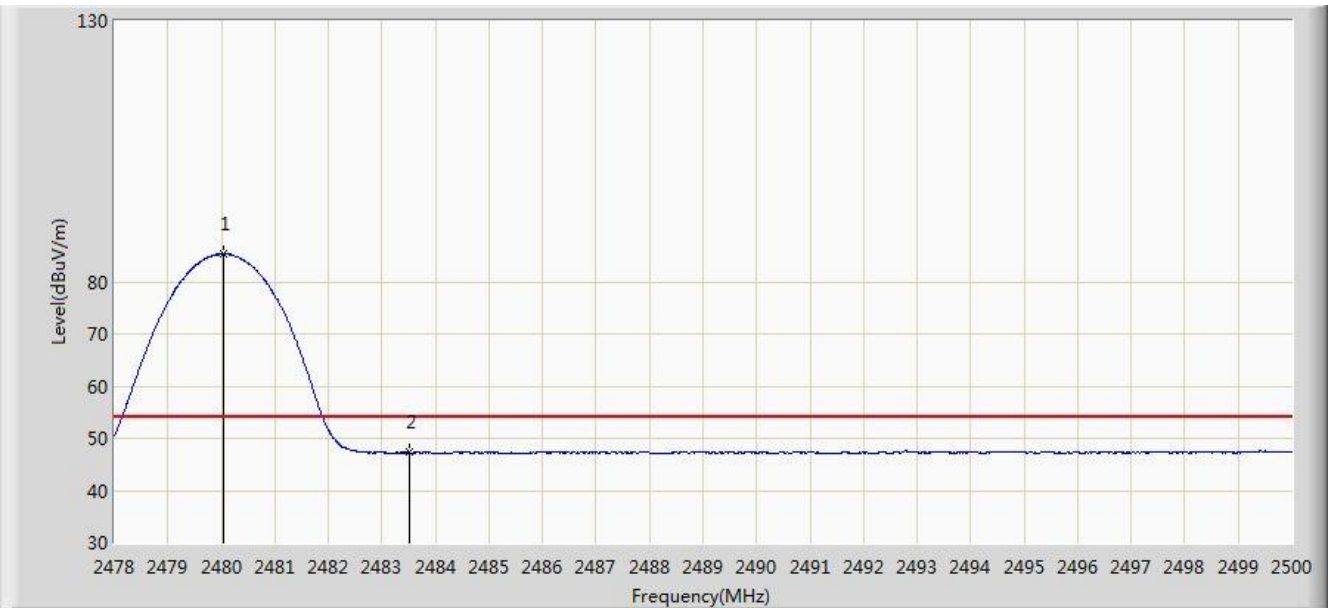

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.046	85.288	52.701	N/A	N/A	32.587	AV
2			2483.500	47.280	14.684	-6.720	54.000	32.596	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

7.11. AC Conducted Emissions Measurement


7.11.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.11.2. Test Setup

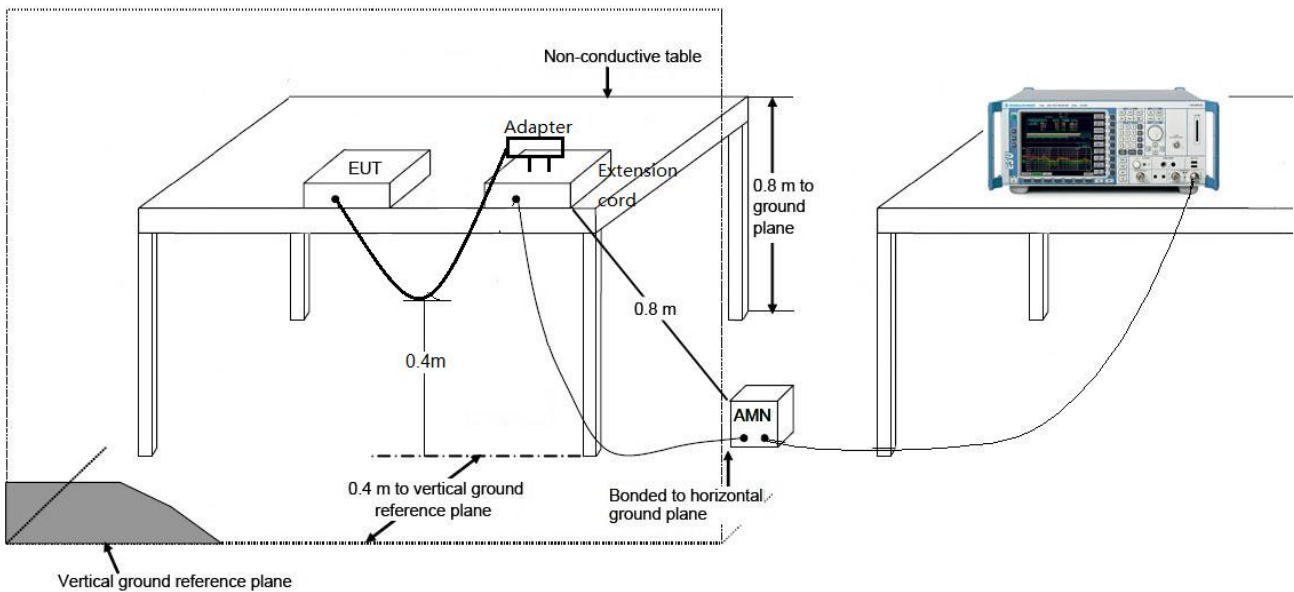

7.11.3. Test Result

Site: SR2	Time: 2018/08/15 - 03:11
Limit: FCC_Part15.207_CE_AC Power_Class B	Engineer: Bacon Dong
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode 1	

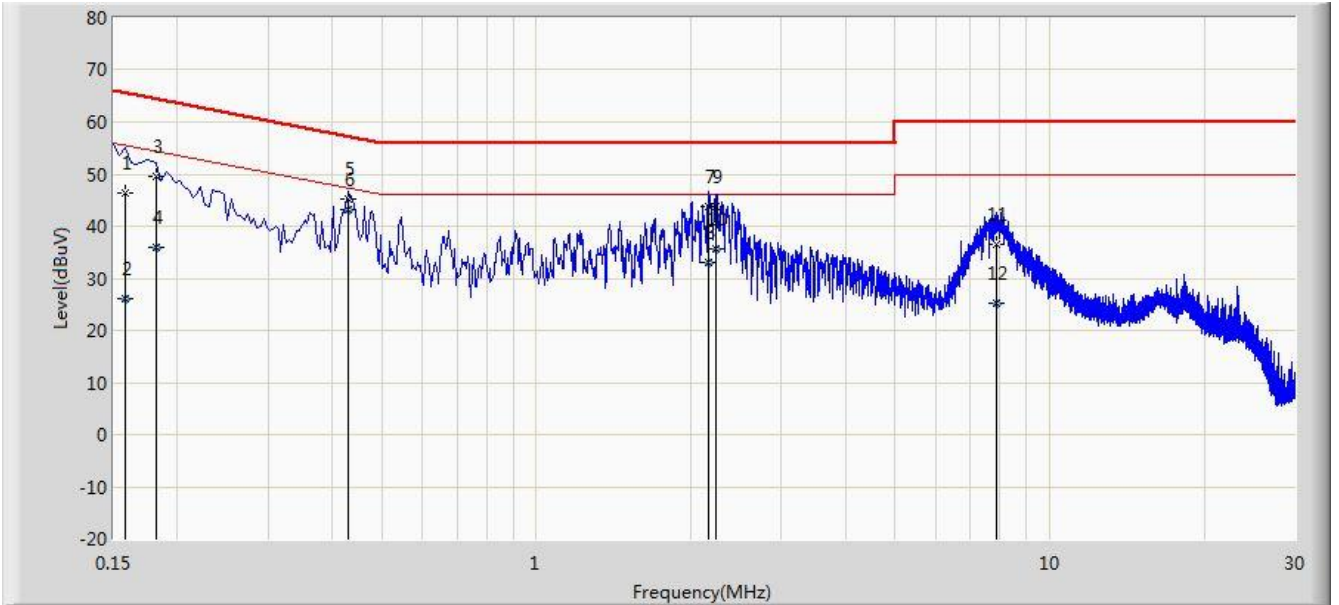


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.158	46.258	35.947	-19.311	65.568	10.311	QP
2			0.158	26.005	15.694	-29.564	55.568	10.311	AV
3			0.182	49.450	39.401	-14.944	64.394	10.048	QP
4			0.182	35.886	25.838	-18.508	54.394	10.048	AV
5			0.430	45.199	35.089	-12.054	57.253	10.110	QP
6		*	0.430	43.135	33.025	-4.117	47.253	10.110	AV
7			2.170	43.766	33.900	-12.234	56.000	9.866	QP
8			2.170	32.963	23.097	-13.037	46.000	9.866	AV
9			2.242	43.831	33.966	-12.169	56.000	9.864	QP
10			2.242	35.765	25.900	-10.235	46.000	9.864	AV
11			7.854	36.553	26.380	-23.447	60.000	10.173	QP
12			7.854	25.116	14.943	-24.884	50.000	10.173	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: SR2	Time: 2018/08/15 - 03:12
Limit: FCC_Part15.207_CE_AC Power_Class B	Engineer: Bacon Dong
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode 1	

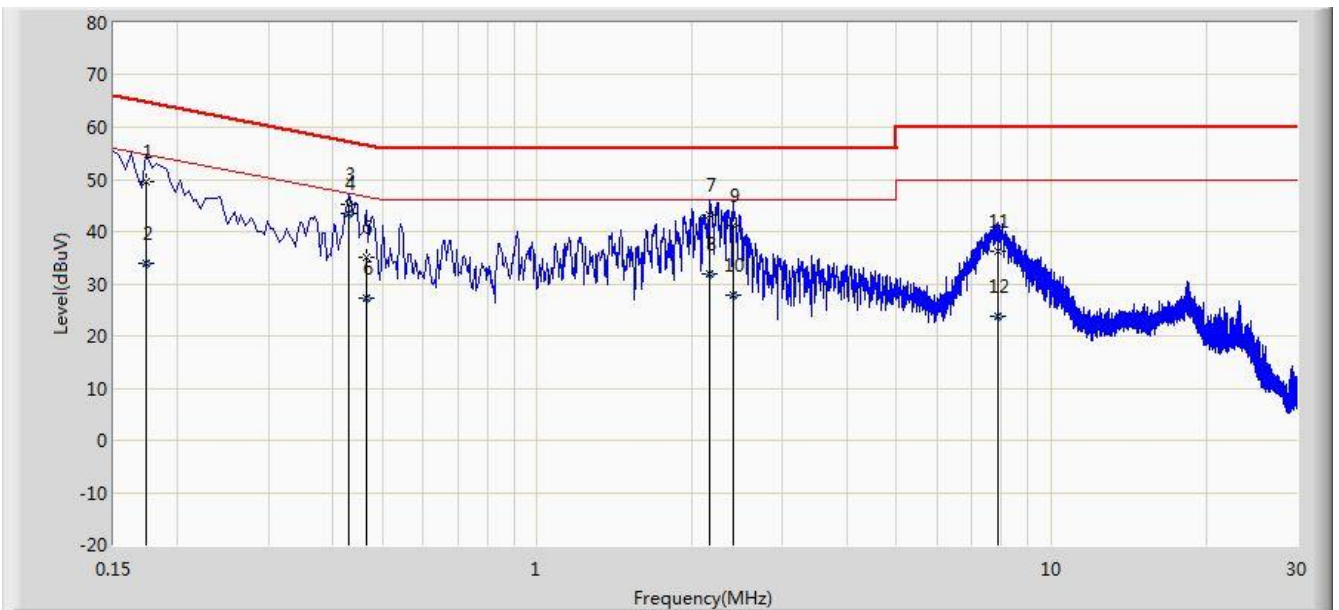

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.174	49.655	39.598	-15.113	64.767	10.057	QP
2			0.174	33.923	23.866	-20.845	54.767	10.057	AV
3			0.430	45.358	35.223	-11.895	57.253	10.135	QP
4		*	0.430	43.418	33.283	-3.835	47.253	10.135	AV
5			0.466	35.180	25.018	-21.405	56.585	10.162	QP
6			0.466	27.192	17.031	-19.393	46.585	10.162	AV
7			2.170	43.122	33.253	-12.878	56.000	9.869	QP
8			2.170	31.918	22.049	-14.082	46.000	9.869	AV
9			2.402	41.225	31.361	-14.775	56.000	9.864	QP
10			2.402	27.726	17.861	-18.274	46.000	9.864	AV
11			7.858	36.334	26.145	-23.666	60.000	10.189	QP
12			7.858	23.863	13.674	-26.137	50.000	10.189	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **AX6000 MU-MIMO Wi-Fi Router** is in compliance with Part 15C of the FCC rules.

_____ The End _____

Appendix A - Test Setup Photograph

Refer to "1808RSU004-UT" file.

Appendix B - EUT Photograph

Refer to "1808RSU004-UE" file.