

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	26°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC2	Test Date	2018/08/12
Test Mode:	802.11g - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	01
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4825.0	39.5	5.6	45.1	74.0	-28.9	Peak	Horizontal
	8216.5	32.2	14.1	46.3	74.0	-27.7	Peak	Horizontal
*	8786.0	32.2	14.9	47.1	87.5	-40.4	Peak	Horizontal
*	9772.0	33.0	17.0	50.0	87.5	-37.5	Peak	Horizontal
	4825.0	45.0	5.6	50.6	74.0	-23.4	Peak	Vertical
	8276.0	33.9	14.0	47.9	74.0	-26.1	Peak	Vertical
*	8769.0	33.5	14.8	48.3	87.5	-39.2	Peak	Vertical
*	10035.5	32.6	17.7	50.3	87.5	-37.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (117.5dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	26°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC2	Test Date	2018/08/12
Test Mode:	802.11g - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	06
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4867.5	50.3	5.6	55.9	74.0	-18.1	Peak	Horizontal
	4874.0	47.9	5.6	53.5	54.0	-0.5	Average	Horizontal
	8259.0	33.5	14.1	47.6	74.0	-26.4	Peak	Horizontal
*	8658.5	33.0	14.4	47.4	92.4	-45.0	Peak	Horizontal
*	9721.0	32.6	16.4	49.0	92.4	-43.4	Peak	Horizontal
	4876.0	46.6	5.6	52.2	74.0	-21.8	Peak	Vertical
	8276.0	33.4	14.0	47.4	74.0	-26.6	Peak	Vertical
*	8743.5	32.6	14.7	47.3	92.4	-45.1	Peak	Vertical
*	9704.0	32.4	16.2	48.6	92.4	-43.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (122.4BμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	26°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC2	Test Date	2018/08/12
Test Mode:	802.11g - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	11
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4927.0	42.5	5.7	48.2	74.0	-25.8	Peak	Horizontal
	8276.0	31.8	14.0	45.8	74.0	-28.2	Peak	Horizontal
*	8777.5	32.5	14.9	47.4	88.7	-41.3	Peak	Horizontal
*	9721.0	32.8	16.4	49.2	88.7	-39.5	Peak	Horizontal
	4918.5	43.4	5.6	49.0	74.0	-25.0	Peak	Vertical
	8276.0	32.8	14.0	46.8	74.0	-27.2	Peak	Vertical
*	8701.0	32.8	14.6	47.4	88.7	-41.3	Peak	Vertical
*	9636.0	32.8	16.2	49.0	88.7	-39.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (118.7dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	26°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC2	Test Date	2018/08/12
Test Mode:	802.11n-HT20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	01
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7545.0	33.5	14.4	47.9	74.0	-26.1	Peak	Horizontal
	8199.5	32.9	14.2	47.1	74.0	-26.9	Peak	Horizontal
*	8794.5	32.5	14.9	47.4	86.0	-38.6	Peak	Horizontal
*	9746.5	32.2	16.8	49.0	86.0	-37.0	Peak	Horizontal
	4825.0	40.3	5.6	45.9	74.0	-28.1	Peak	Vertical
	7672.5	34.4	13.9	48.3	74.0	-25.7	Peak	Vertical
*	8667.0	33.0	14.4	47.4	86.0	-38.6	Peak	Vertical
*	9636.0	32.2	16.2	48.4	86.0	-37.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (116.0dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	26°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC2	Test Date	2018/08/12
Test Mode:	802.11n-HT20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	06
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	4876.0	45.1	5.6	50.7	74.0	-23.3	Peak	Horizontal
	8191.0	34.5	14.2	48.7	74.0	-25.3	Peak	Horizontal
*	8769.0	33.1	14.8	47.9	91.3	-43.4	Peak	Horizontal
*	10035.5	32.4	17.7	50.1	91.3	-41.2	Peak	Horizontal
	4876.0	47.1	5.6	52.7	74.0	-21.3	Peak	Vertical
	8352.5	32.0	13.8	45.8	74.0	-28.2	Peak	Vertical
*	8854.0	33.4	14.8	48.2	91.3	-43.1	Peak	Vertical
*	9712.5	32.1	16.3	48.4	91.3	-42.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (121.3dB μ V/m) or 15.209 which is higher.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	26°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC2	Test Date	2018/08/12
Test Mode:	802.11n-HT20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	11
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4927.0	39.3	5.7	45.0	74.0	-29.0	Peak	Horizontal
	8242.0	32.2	14.2	46.4	74.0	-27.6	Peak	Horizontal
*	8786.0	32.4	14.9	47.3	86.5	-39.2	Peak	Horizontal
*	9772.0	32.7	17.0	49.7	86.5	-36.8	Peak	Horizontal
	4935.5	38.8	5.7	44.5	74.0	-29.5	Peak	Vertical
	7468.5	33.7	14.1	47.8	74.0	-26.2	Peak	Vertical
*	8820.0	33.0	14.9	47.9	86.5	-38.6	Peak	Vertical
*	10163.0	32.4	17.8	50.2	86.5	-36.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (116.5dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	26°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC2	Test Date	2018/08/12
Test Mode:	802.11n-HT40 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	03
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7579.0	33.5	13.9	47.4	74.0	-26.6	Peak	Horizontal
	8276.0	32.9	14.0	46.9	74.0	-27.1	Peak	Horizontal
*	8692.5	33.0	14.6	47.6	81.5	-33.9	Peak	Horizontal
*	9670.0	32.0	16.5	48.5	81.5	-33.0	Peak	Horizontal
	7468.5	34.4	14.1	48.5	74.0	-25.5	Peak	Vertical
	8216.5	33.5	14.1	47.6	74.0	-26.4	Peak	Vertical
*	8692.5	33.0	14.6	47.6	81.5	-33.9	Peak	Vertical
*	9721.0	32.1	16.4	48.5	81.5	-33.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (111.5dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	26°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC2	Test Date	2018/08/12
Test Mode:	802.11n-HT40 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	06
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7366.5	33.1	13.9	47.0	74.0	-27.0	Peak	Horizontal
	8412.0	34.1	13.9	48.0	74.0	-26.0	Peak	Horizontal
*	8769.0	32.9	14.8	47.7	84.7	-37.0	Peak	Horizontal
*	9831.5	32.3	17.2	49.5	84.7	-35.2	Peak	Horizontal
	4859.0	39.8	5.6	45.4	74.0	-28.6	Peak	Vertical
	7604.5	34.0	14.2	48.2	74.0	-25.8	Peak	Vertical
*	8922.0	35.0	14.7	49.7	84.7	-35.0	Peak	Vertical
*	9746.5	33.4	16.8	50.2	84.7	-34.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (114.7dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	26°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC2	Test Date	2018/08/12
Test Mode:	802.11n-HT40 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	09
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7434.5	33.3	14.3	47.6	74.0	-26.4	Peak	Horizontal
	8276.0	32.2	14.0	46.2	74.0	-27.8	Peak	Horizontal
*	8692.5	33.3	14.6	47.9	82.5	-34.6	Peak	Horizontal
*	9678.5	33.2	16.4	49.6	82.5	-32.9	Peak	Horizontal
	7604.5	34.4	14.2	48.6	74.0	-25.4	Peak	Vertical
	8208.0	32.9	14.1	47.0	74.0	-27.0	Peak	Vertical
*	8854.0	33.1	14.8	47.9	82.5	-34.6	Peak	Vertical
*	9882.5	33.8	17.3	51.1	82.5	-31.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (112.5dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	26°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC2	Test Date	2018/08/12
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	01
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7604.5	34.9	14.2	49.1	74.0	-24.9	Peak	Horizontal
	8352.5	33.5	13.8	47.3	74.0	-26.7	Peak	Horizontal
*	8692.5	32.4	14.6	47.0	85.9	-38.9	Peak	Horizontal
*	10069.5	32.1	17.5	49.6	85.9	-36.3	Peak	Horizontal
	7570.5	33.5	14.0	47.5	74.0	-26.5	Peak	Vertical
	8284.5	34.1	13.9	48.0	74.0	-26.0	Peak	Vertical
*	8786.0	32.3	14.9	47.2	85.9	-38.7	Peak	Vertical
*	9814.5	33.2	17.0	50.2	85.9	-35.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (115.9dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	26°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC2	Test Date	2018/08/12
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	06
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4876.0	45.4	5.6	51.0	74.0	-23.0	Peak	Horizontal
	7570.5	34.3	14.0	48.3	74.0	-25.7	Peak	Horizontal
*	8769.0	32.2	14.8	47.0	90.4	-43.4	Peak	Horizontal
*	9678.5	33.2	16.4	49.6	90.4	-40.8	Peak	Horizontal
	4876.0	46.5	5.6	52.1	74.0	-21.9	Peak	Vertical
	7562.0	33.9	14.1	48.0	74.0	-26.0	Peak	Vertical
*	8684.0	34.0	14.5	48.5	90.4	-41.9	Peak	Vertical
*	9874.0	34.4	17.3	51.7	90.4	-38.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (120.4dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	26°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC2	Test Date	2018/08/12
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	11
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4918.5	40.7	5.6	46.3	74.0	-27.7	Peak	Horizontal
	8310.0	33.2	13.8	47.0	74.0	-27.0	Peak	Horizontal
*	8735.0	33.4	14.6	48.0	86.8	-38.8	Peak	Horizontal
*	9678.5	32.3	16.4	48.7	86.8	-38.1	Peak	Horizontal
	4910.0	40.1	5.6	45.7	74.0	-28.3	Peak	Vertical
	7528.0	35.3	14.5	49.8	74.0	-24.2	Peak	Vertical
*	8811.5	33.2	14.9	48.1	86.8	-38.7	Peak	Vertical
*	10154.5	32.5	17.8	50.3	86.8	-36.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (116.8dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	26°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC2	Test Date	2018/08/12
Test Mode:	802.11ac-VHT40 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	03
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7400.5	33.1	13.9	47.0	74.0	-27.0	Peak	Horizontal
	8327.0	33.7	13.9	47.6	74.0	-26.4	Peak	Horizontal
*	8769.0	32.9	14.8	47.7	81.3	-33.6	Peak	Horizontal
*	10086.5	32.2	17.7	49.9	81.3	-31.4	Peak	Horizontal
	7511.0	34.0	14.3	48.3	74.0	-25.7	Peak	Vertical
	8242.0	32.5	14.2	46.7	74.0	-27.3	Peak	Vertical
*	8854.0	33.6	14.8	48.4	81.3	-32.9	Peak	Vertical
*	10078.0	32.3	17.5	49.8	81.3	-31.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (111.3dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	26°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC2	Test Date	2018/08/12
Test Mode:	802.11ac-VHT40 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	06
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4876.0	38.7	5.6	44.3	74.0	-29.7	Peak	Horizontal
	7562.0	35.3	14.1	49.4	74.0	-24.6	Peak	Horizontal
*	8709.5	34.5	14.6	49.1	84.1	-35.0	Peak	Horizontal
*	9831.5	32.2	17.2	49.4	84.1	-34.7	Peak	Horizontal
	4876.0	39.2	5.6	44.8	74.0	-29.2	Peak	Vertical
	7485.5	35.3	14.0	49.3	74.0	-24.7	Peak	Vertical
*	8726.5	33.1	14.6	47.7	84.1	-36.4	Peak	Vertical
*	9687.0	32.4	16.4	48.8	84.1	-35.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (114.1dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	26°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC2	Test Date	2018/08/12
Test Mode:	802.11ac-VHT40 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	09
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7434.5	33.7	14.3	48.0	74.0	-26.0	Peak	Horizontal
	8310.0	32.6	13.8	46.4	74.0	-27.6	Peak	Horizontal
*	8803.0	32.1	14.9	47.0	83.1	-36.1	Peak	Horizontal
*	9729.5	32.5	16.5	49.0	83.1	-34.1	Peak	Horizontal
	7502.5	33.6	14.2	47.8	74.0	-26.2	Peak	Vertical
	8267.5	33.9	14.0	47.9	74.0	-26.1	Peak	Vertical
*	8803.0	32.7	14.9	47.6	83.1	-35.5	Peak	Vertical
*	10061.0	32.6	17.5	50.1	83.1	-33.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (113.1dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	26°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC2	Test Date	2018/08/12
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	01
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7570.5	33.9	14.0	47.9	74.0	-26.1	Peak	Horizontal
	8276.0	32.6	14.0	46.6	74.0	-27.4	Peak	Horizontal
*	8743.5	32.6	14.7	47.3	87.6	-40.3	Peak	Horizontal
*	9721.0	32.2	16.4	48.6	87.6	-39.0	Peak	Horizontal
	4825.0	40.6	5.6	46.2	74.0	-27.8	Peak	Vertical
	7613.0	33.8	14.2	48.0	74.0	-26.0	Peak	Vertical
*	8769.0	32.8	14.8	47.6	87.6	-40.0	Peak	Vertical
*	9729.5	32.1	16.5	48.6	87.6	-39.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (117.6dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	26°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC2	Test Date	2018/08/12
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	06
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4876.0	43.9	5.6	49.5	74.0	-24.5	Peak	Horizontal
	8242.0	32.6	14.2	46.8	74.0	-27.2	Peak	Horizontal
*	8803.0	32.3	14.9	47.2	93.0	-45.8	Peak	Horizontal
*	10052.5	32.5	17.5	50.0	93.0	-43.0	Peak	Horizontal
	4876.0	47.1	5.6	52.7	74.0	-21.3	Peak	Vertical
	8165.5	32.1	14.4	46.5	74.0	-27.5	Peak	Vertical
*	8675.5	32.8	14.5	47.3	93.0	-45.7	Peak	Vertical
*	9712.5	32.2	16.3	48.5	93.0	-44.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (123.0dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	26°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC2	Test Date	2018/08/12
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	11
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	4927.0	38.9	5.7	44.6	74.0	-29.4	Peak	Horizontal
	8352.5	33.2	13.8	47.0	74.0	-27.0	Peak	Horizontal
*	8811.5	32.9	14.9	47.8	87.7	-39.9	Peak	Horizontal
*	9721.0	33.4	16.4	49.8	87.7	-37.9	Peak	Horizontal
	4918.5	40.4	5.6	46.0	74.0	-28.0	Peak	Vertical
	8335.5	32.6	13.9	46.5	74.0	-27.5	Peak	Vertical
*	8794.5	33.0	14.9	47.9	87.7	-39.8	Peak	Vertical
*	9678.5	32.7	16.4	49.1	87.7	-38.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (117.7dB μ V/m) or 15.209 which is higher.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	26°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC2	Test Date	2018/08/12
Test Mode:	802.11ax-HE40 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	03
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7502.5	34.1	14.2	48.3	74.0	-25.7	Peak	Horizontal
	8276.0	32.0	14.0	46.0	74.0	-28.0	Peak	Horizontal
*	8769.0	32.8	14.8	47.6	83.9	-36.3	Peak	Horizontal
*	9865.5	32.8	17.3	50.1	83.9	-33.8	Peak	Horizontal
	7502.5	33.8	14.2	48.0	74.0	-26.0	Peak	Vertical
	8216.5	33.1	14.1	47.2	74.0	-26.8	Peak	Vertical
*	8743.5	32.5	14.7	47.2	83.9	-36.7	Peak	Vertical
*	10078.0	32.7	17.5	50.2	83.9	-33.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (113.9dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	26°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC2	Test Date	2018/08/12
Test Mode:	802.11ax-HE40 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	06
Remark:	<ol style="list-style-type: none"> Average measurement was not performed if peak level lower than average limit. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. 		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7468.5	33.9	14.1	48.0	74.0	-26.0	Peak	Horizontal
	8301.5	33.6	13.8	47.4	74.0	-26.6	Peak	Horizontal
*	8726.5	32.5	14.6	47.1	86.8	-39.7	Peak	Horizontal
*	9755.0	32.2	16.9	49.1	86.8	-37.7	Peak	Horizontal
	7545.0	33.8	14.4	48.2	74.0	-25.8	Peak	Vertical
	8293.0	34.7	13.9	48.6	74.0	-25.4	Peak	Vertical
*	8777.5	32.9	14.9	47.8	86.8	-39.0	Peak	Vertical
*	9678.5	32.6	16.4	49.0	86.8	-37.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (116.8dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	26°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC2	Test Date	2018/08/12
Test Mode:	802.11ax-HE40 - Ant 0 + 1 + 2 + 3 (CDD Mode)	Test Channel:	09
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7604.5	36.1	14.2	50.3	74.0	-23.7	Peak	Horizontal
	8242.0	32.7	14.2	46.9	74.0	-27.1	Peak	Horizontal
*	8692.5	33.6	14.6	48.2	81.9	-33.7	Peak	Horizontal
*	9899.5	33.3	17.3	50.6	81.9	-31.3	Peak	Horizontal
	7536.5	34.5	14.4	48.9	74.0	-25.1	Peak	Vertical
	8276.0	33.4	14.0	47.4	74.0	-26.6	Peak	Vertical
*	8709.5	33.4	14.6	48.0	81.9	-33.9	Peak	Vertical
*	10061.0	32.6	17.5	50.1	81.9	-31.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (111.9dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	26°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC2	Test Date	2018/08/12
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	01
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	3983.5	37.6	2.6	40.2	74.0	-33.8	Peak	Horizontal
	4833.5	43.4	5.6	49.0	74.0	-25.0	Peak	Horizontal
*	7137.0	32.7	13.7	46.4	87.2	-40.8	Peak	Horizontal
*	9806.0	33.1	17.0	50.1	87.2	-37.1	Peak	Horizontal
	4000.5	37.7	2.6	40.3	74.0	-33.7	Peak	Vertical
	4825.0	43.2	5.6	48.8	74.0	-25.2	Peak	Vertical
*	6610.0	33.8	10.7	44.5	87.2	-42.7	Peak	Vertical
*	10197.0	32.6	18.1	50.7	87.2	-36.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (117.2dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	26°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC2	Test Date	2018/08/12
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	06
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4000.5	37.7	2.6	40.3	74.0	-33.7	Peak	Horizontal
	4873.8	50.2	5.6	55.8	74.0	-18.2	Peak	Horizontal
	4873.8	40.0	5.6	45.6	54.0	-8.4	Average	Horizontal
*	6635.5	33.8	10.7	44.5	92.3	-47.8	Peak	Horizontal
*	10392.5	31.4	18.8	50.2	92.3	-42.1	Peak	Horizontal
	4000.5	37.8	2.6	40.4	74.0	-33.6	Peak	Vertical
	4867.5	47.9	5.6	53.5	74.0	-20.5	Peak	Vertical
*	7120.0	33.7	13.6	47.3	92.3	-45.0	Peak	Vertical
*	10163.0	32.5	17.8	50.3	92.3	-42.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (122.3dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	26°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC2	Test Date	2018/08/12
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	11
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	3898.5	37.4	2.4	39.8	74.0	-34.2	Peak	Horizontal
	4935.5	48.8	5.7	54.5	74.0	-19.5	Peak	Horizontal
	4927.5	34.2	5.7	39.9	54.0	-14.1	Average	Horizontal
*	6669.5	34.1	10.8	44.9	87.8	-42.9	Peak	Horizontal
*	10197.0	32.5	18.1	50.6	87.8	-37.2	Peak	Horizontal
	4034.5	38.0	2.8	40.8	74.0	-33.2	Peak	Vertical
	4935.5	44.6	5.7	50.3	74.0	-23.7	Peak	Vertical
*	7111.5	32.6	13.6	46.2	87.8	-41.6	Peak	Vertical
*	10188.5	32.8	18.0	50.8	87.8	-37.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (117.8dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	26°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC2	Test Date	2018/08/12
Test Mode:	802.11ac-VHT40 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	03
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	3992.0	37.9	2.6	40.5	74.0	-33.5	Peak	Horizontal
	4825.0	39.0	5.6	44.6	74.0	-29.4	Peak	Horizontal
*	6635.5	35.1	10.7	45.8	84.7	-38.9	Peak	Horizontal
*	10290.5	31.8	18.4	50.2	84.7	-34.5	Peak	Horizontal
	3975.0	37.8	2.6	40.4	74.0	-33.6	Peak	Vertical
	4825.0	39.8	5.6	45.4	74.0	-28.6	Peak	Vertical
*	6712.0	34.4	10.7	45.1	84.7	-39.6	Peak	Vertical
*	10001.5	32.3	17.6	49.9	84.7	-34.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (114.7dB μ V/m) or 15.209 which is higher.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	26°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC2	Test Date	2018/08/12
Test Mode:	802.11ac-VHT40 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	06
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4009.0	36.9	2.6	39.5	74.0	-34.5	Peak	Horizontal
	4876.0	40.6	5.6	46.2	74.0	-27.8	Peak	Horizontal
*	7128.5	32.9	13.6	46.5	86.6	-40.1	Peak	Horizontal
*	10273.5	32.3	18.3	50.6	86.6	-36.0	Peak	Horizontal
	4000.5	36.9	2.6	39.5	74.0	-34.5	Peak	Vertical
	4850.5	42.4	5.6	48.0	74.0	-26.0	Peak	Vertical
*	6686.5	34.4	10.8	45.2	86.6	-41.4	Peak	Vertical
*	10001.5	32.9	17.6	50.5	86.6	-36.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (116.6dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	26°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC2	Test Date	2018/08/12
Test Mode:	802.11ac-VHT40 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	09
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	3975.0	37.4	2.6	40.0	74.0	-34.0	Peak	Horizontal
	4927.0	39.3	5.7	45.0	74.0	-29.0	Peak	Horizontal
*	6533.5	33.8	10.6	44.4	88.1	-43.7	Peak	Horizontal
*	10044.0	32.6	17.6	50.2	88.1	-37.9	Peak	Horizontal
	4000.5	38.1	2.6	40.7	74.0	-33.3	Peak	Vertical
	4927.0	43.0	5.7	48.7	74.0	-25.3	Peak	Vertical
*	6703.5	34.6	10.7	45.3	88.1	-42.8	Peak	Vertical
*	10001.5	32.9	17.6	50.5	88.1	-37.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (118.1dB μ V/m) or 15.209 which is higher.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	26°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC2	Test Date	2018/08/12
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	01
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	3983.5	37.0	2.6	39.6	74.0	-34.4	Peak	Horizontal
	4833.5	41.8	5.6	47.4	74.0	-26.6	Peak	Horizontal
*	7145.5	33.0	13.7	46.7	89.1	-42.4	Peak	Horizontal
*	10265.0	31.9	18.2	50.1	89.1	-39.0	Peak	Horizontal
	4000.5	37.5	2.6	40.1	74.0	-33.9	Peak	Vertical
	4825.0	41.9	5.6	47.5	74.0	-26.5	Peak	Vertical
*	6754.5	33.5	10.8	44.3	89.1	-44.8	Peak	Vertical
*	10001.5	32.6	17.6	50.2	89.1	-38.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (119.1dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	26°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC2	Test Date	2018/08/12
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	06
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	3890.0	38.5	2.4	40.9	74.0	-33.1	Peak	Horizontal
	4873.9	51.2	5.6	56.8	74.0	-17.2	Peak	Horizontal
	4873.9	39.2	5.6	44.8	54.0	-9.2	Average	Horizontal
	4876.0	51.2	5.6	56.8	74.0	-17.2	Peak	Horizontal
*	6576.0	33.9	10.7	44.6	95.6	-51.0	Peak	Horizontal
*	10154.5	32.4	17.8	50.2	95.6	-45.4	Peak	Horizontal
	4060.0	37.0	3.1	40.1	74.0	-33.9	Peak	Vertical
	4876.4	53.3	5.6	58.9	74.0	-15.1	Peak	Vertical
	4876.4	39.0	5.6	44.6	54.0	-9.4	Average	Vertical
*	6610.0	33.6	10.7	44.3	95.6	-51.3	Peak	Vertical
*	10375.5	32.2	18.7	50.9	95.6	-44.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (125.6dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	26°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC2	Test Date	2018/08/12
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	11
Remark:	<ol style="list-style-type: none"> Average measurement was not performed if peak level lower than average limit. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. 		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	4119.5	36.9	3.2	40.1	74.0	-33.9	Peak	Horizontal
	4927.0	42.8	5.7	48.5	74.0	-25.5	Peak	Horizontal
*	7188.0	33.4	13.9	47.3	90.9	-43.6	Peak	Horizontal
*	10146.0	33.4	17.8	51.2	90.9	-39.7	Peak	Horizontal
	4136.5	36.1	3.4	39.5	74.0	-34.5	Peak	Vertical
	4935.5	40.3	5.7	46.0	74.0	-28.0	Peak	Vertical
*	7120.0	32.4	13.6	46.0	90.9	-44.9	Peak	Vertical
*	10112.0	32.1	18.0	50.1	90.9	-40.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (120.9dB μ V/m) or 15.209 which is higher.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	26°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC2	Test Date	2018/08/12
Test Mode:	802.11ax-HE40 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	03
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	3983.5	37.3	2.6	39.9	74.0	-34.1	Peak	Horizontal
	4859.0	37.1	5.6	42.7	74.0	-31.3	Peak	Horizontal
*	7103.0	33.2	13.5	46.7	85.6	-38.9	Peak	Horizontal
*	10265.0	33.3	18.2	51.5	85.6	-34.1	Peak	Horizontal
	4000.5	38.3	2.6	40.9	74.0	-33.1	Peak	Vertical
	4825.0	40.6	5.6	46.2	74.0	-27.8	Peak	Vertical
*	6372.0	34.9	9.3	44.2	85.6	-41.4	Peak	Vertical
*	10001.5	33.2	17.6	50.8	85.6	-34.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (115.6dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	26°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC2	Test Date	2018/08/12
Test Mode:	802.11ax-HE40 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	06
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	3975.0	37.5	2.6	40.1	74.0	-33.9	Peak	Horizontal
	4859.0	41.5	5.6	47.1	74.0	-26.9	Peak	Horizontal
*	6542.0	33.9	10.6	44.5	88.1	-43.6	Peak	Horizontal
*	10392.5	31.8	18.8	50.6	88.1	-37.5	Peak	Horizontal
	3992.0	38.2	2.6	40.8	74.0	-33.2	Peak	Vertical
	4901.5	42.0	5.6	47.6	74.0	-26.4	Peak	Vertical
*	7162.5	33.1	13.7	46.8	88.1	-41.3	Peak	Vertical
*	10078.0	33.1	17.5	50.6	88.1	-37.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (118.1dB μ V/m) or 15.209 which is higher.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	AX6000 MU-MIMO Wi-Fi Router	Temperature	26°C
Test Engineer	Dandy Li	Relative Humidity	56%
Test Site	AC2	Test Date	2018/08/12
Test Mode:	802.11ax-HE40 - Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	Test Channel:	09
Remark:	<ol style="list-style-type: none"> Average measurement was not performed if peak level lower than average limit. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. 		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	3975.0	37.6	2.6	40.2	74.0	-33.8	Peak	Horizontal
	4918.5	41.5	5.6	47.1	74.0	-26.9	Peak	Horizontal
*	6542.0	33.6	10.6	44.2	87.8	-43.6	Peak	Horizontal
*	10180.0	32.7	17.9	50.6	87.8	-37.2	Peak	Horizontal
	4051.5	37.6	3.0	40.6	74.0	-33.4	Peak	Vertical
	4927.0	46.0	5.7	51.7	74.0	-22.3	Peak	Vertical
*	6635.5	34.5	10.7	45.2	87.8	-42.6	Peak	Vertical
*	10137.5	32.5	17.9	50.4	87.8	-37.4	Peak	Vertical


Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (117.8dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Worst Case of Radiated Emission below 1GHz:

Site: AC2	Time: 2018/09/27 - 14:53
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: VULB 9168 _20-2000MHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: There is the worst case within frequency range 30MHz~1GHz.	

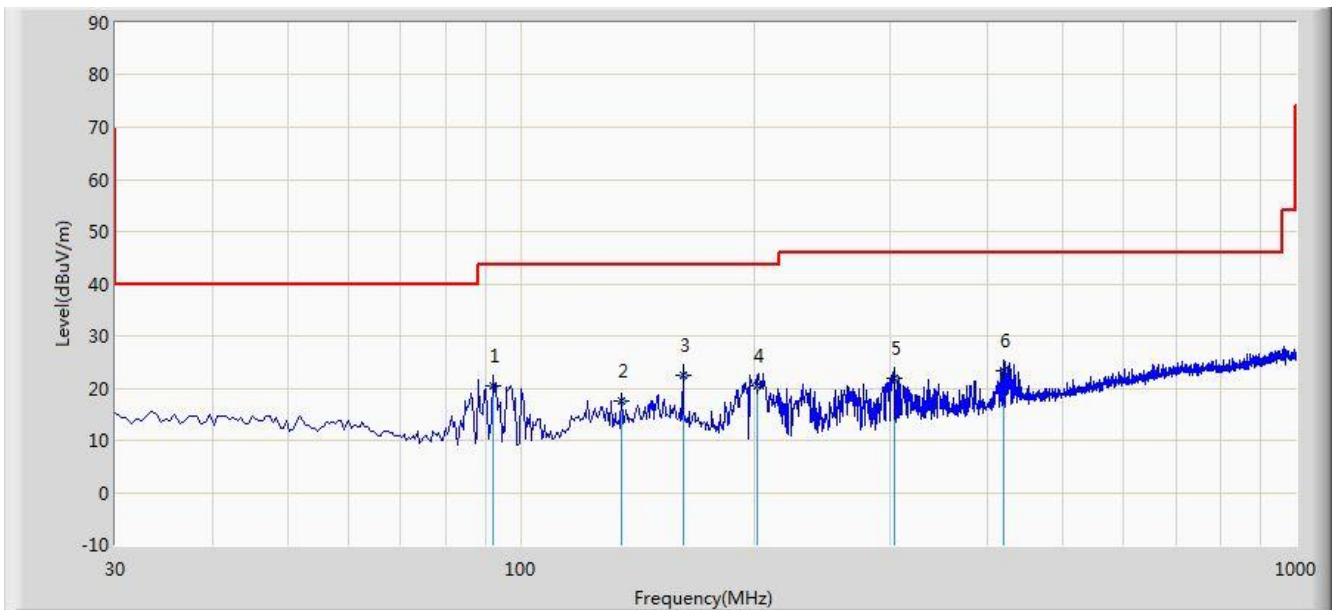


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			92.080	20.493	10.024	-23.007	43.500	10.469	QP
2			134.760	17.574	3.379	-25.926	43.500	14.195	QP
3		*	161.920	22.540	7.410	-20.960	43.500	15.130	QP
4			201.690	20.571	9.336	-22.929	43.500	11.235	QP
5			303.055	21.892	7.412	-24.108	46.000	14.481	QP
6			419.455	23.473	6.345	-22.527	46.000	17.128	QP

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

Site: AC2	Time: 2018/09/27 - 14:58
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: VULB 9168 _20-2000MHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: There is the worst case within frequency range 30MHz~1GHz.	

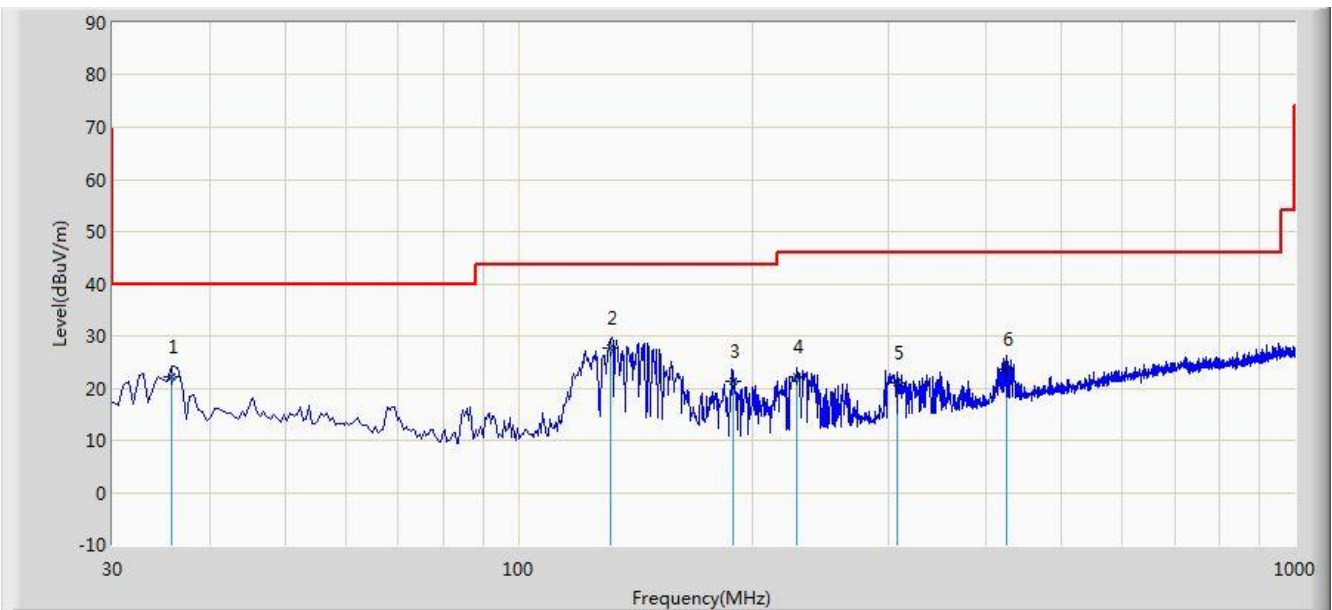

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			35.820	22.271	8.216	-17.729	40.000	14.055	QP
2		*	131.580	27.825	13.872	-15.675	43.500	13.954	QP
3			189.080	21.385	9.538	-22.115	43.500	11.847	QP
4			227.880	22.035	9.557	-23.965	46.000	12.478	QP
5			307.420	20.941	6.343	-25.059	46.000	14.598	QP
6			426.245	23.602	6.289	-22.398	46.000	17.313	QP

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2. Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

7.7.3. Test Setting


Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize


7.7.4. Test Setup

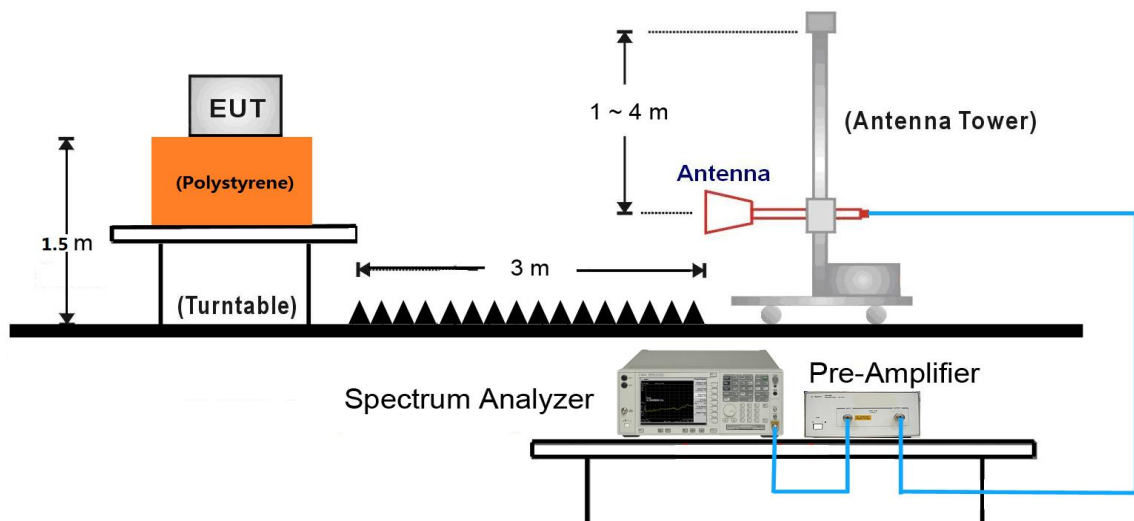

Note: This item was performed with the WIFI antenna connected.

7.7.5. Test Result

Site: AC2	Time: 2018/08/09 - 22:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2412MHz (CDD Mode)	

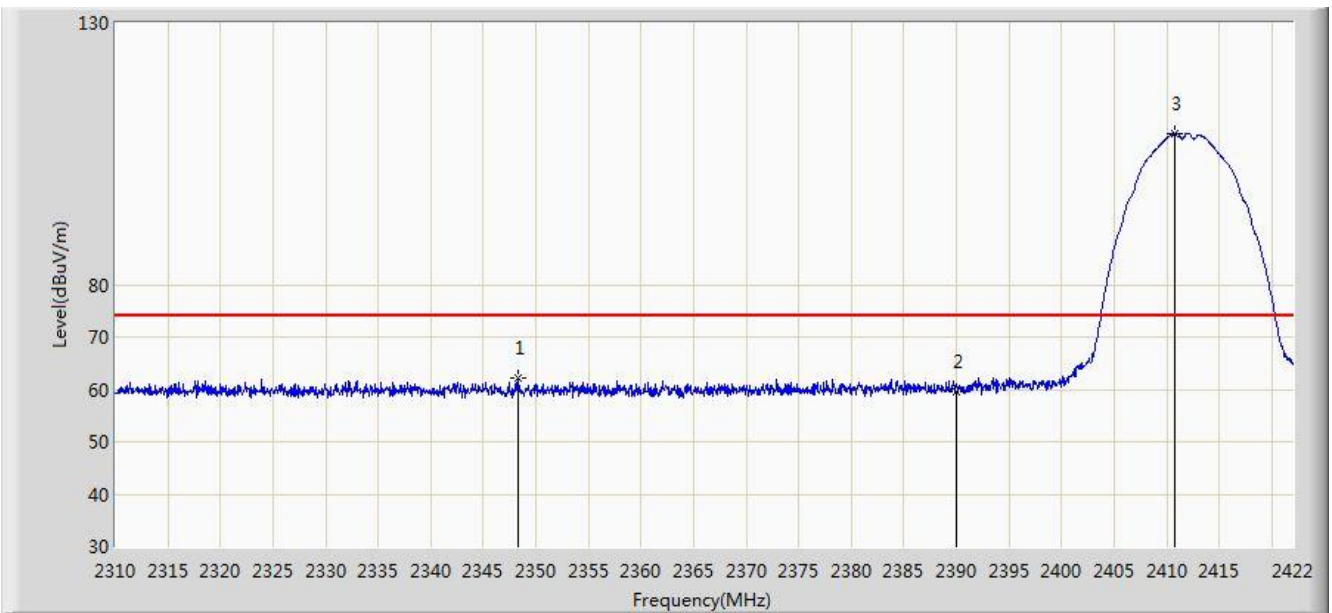


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2348.360	62.153	29.498	-11.847	74.000	32.655	PK
2			2390.000	59.604	27.029	-14.396	74.000	32.575	PK
3			2410.800	108.908	76.359	N/A	N/A	32.550	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/09 - 22:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2412MHz (CDD Mode)	

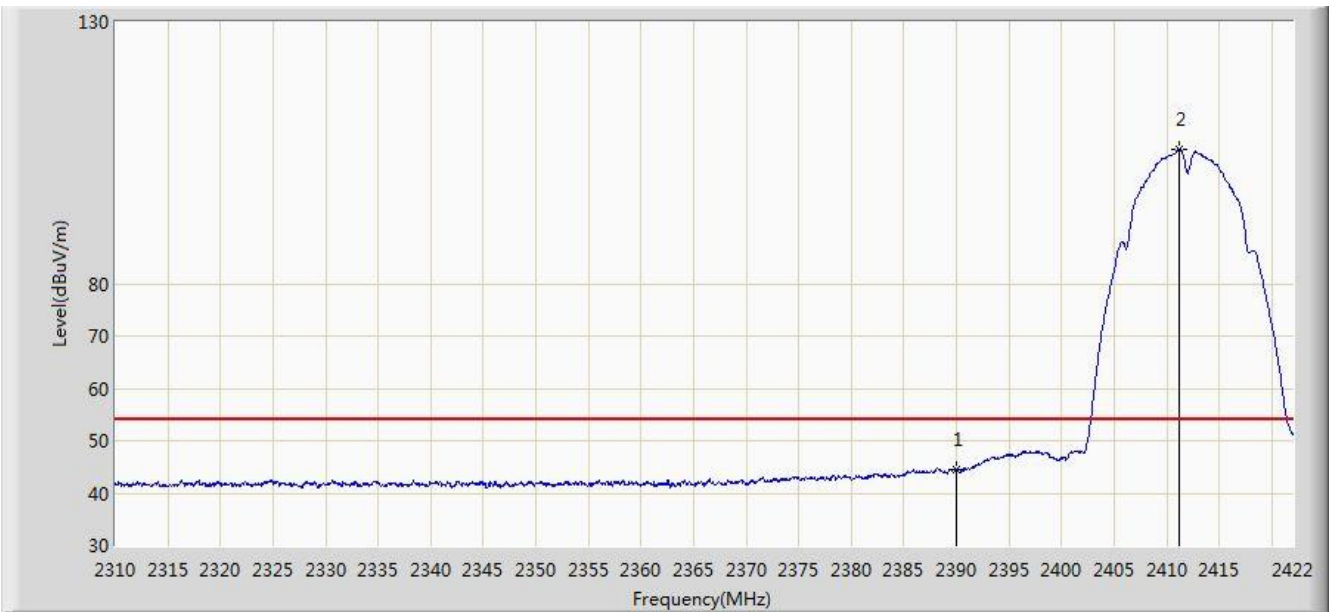


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.448	11.873	-9.552	54.000	32.575	AV
2			2411.192	105.643	73.094	N/A	N/A	32.549	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/09 - 22:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2412MHz (CDD Mode)	

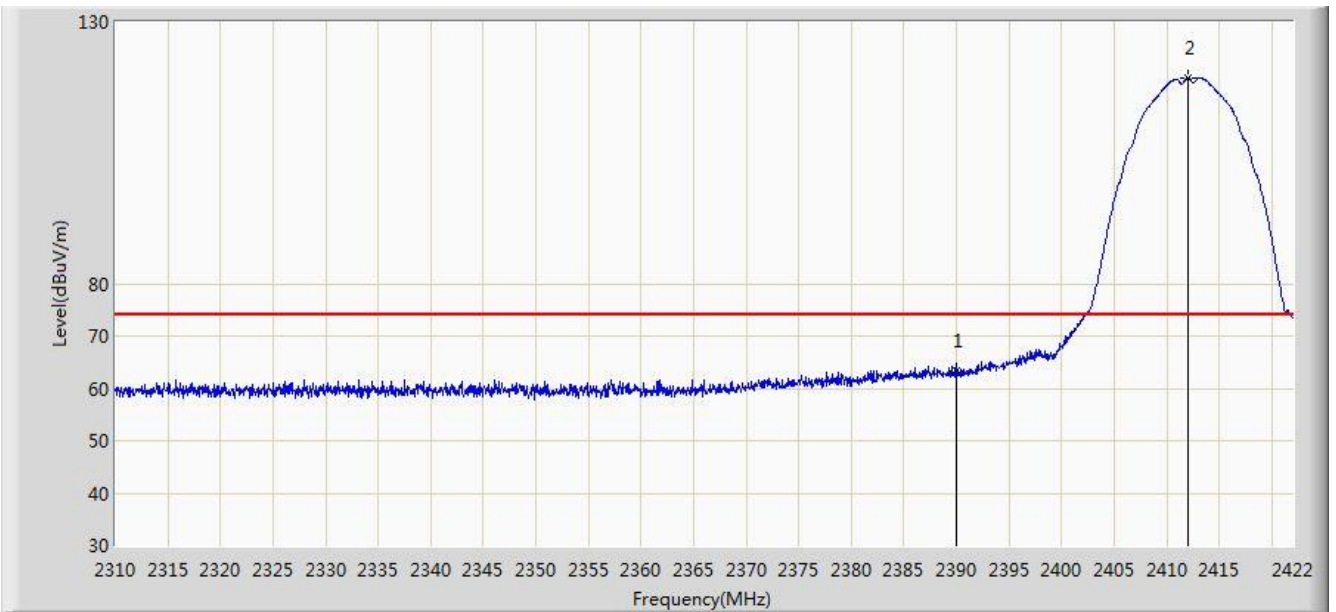


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	63.246	30.671	-10.754	74.000	32.575	PK
2			2412.032	119.360	86.812	N/A	N/A	32.548	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/09 - 22:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2412MHz (CDD Mode)	

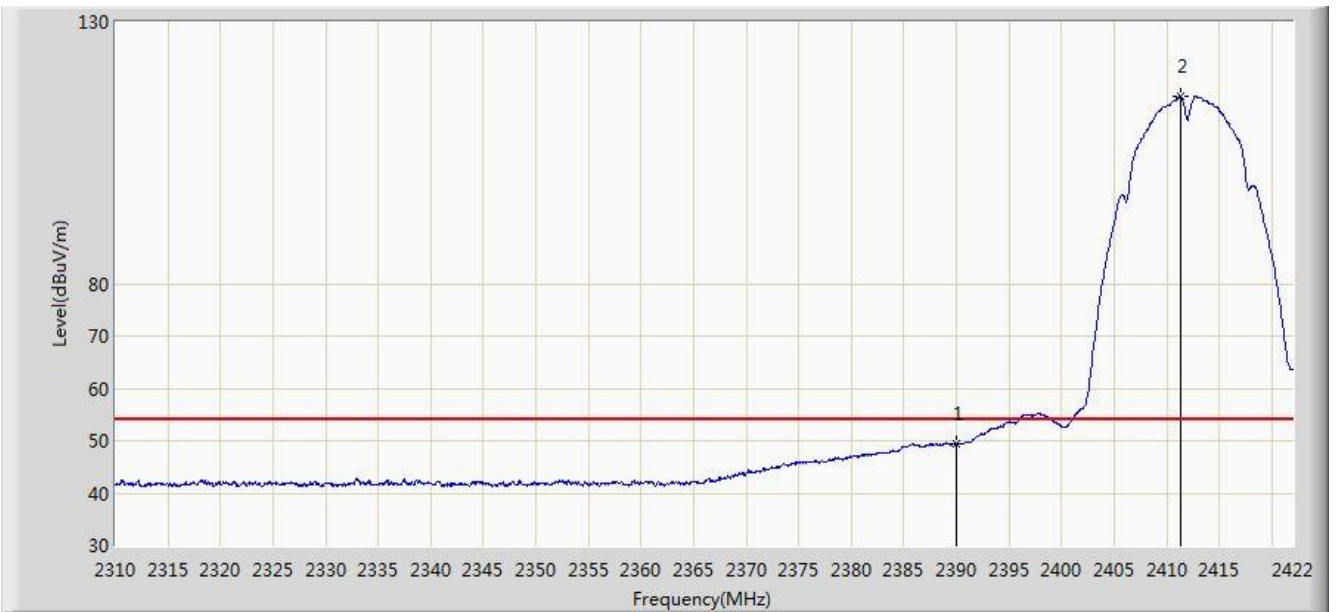


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.507	16.932	-4.493	54.000	32.575	AV
2			2411.304	115.773	83.224	N/A	N/A	32.549	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/09 - 22:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2437MHz (CDD Mode)	

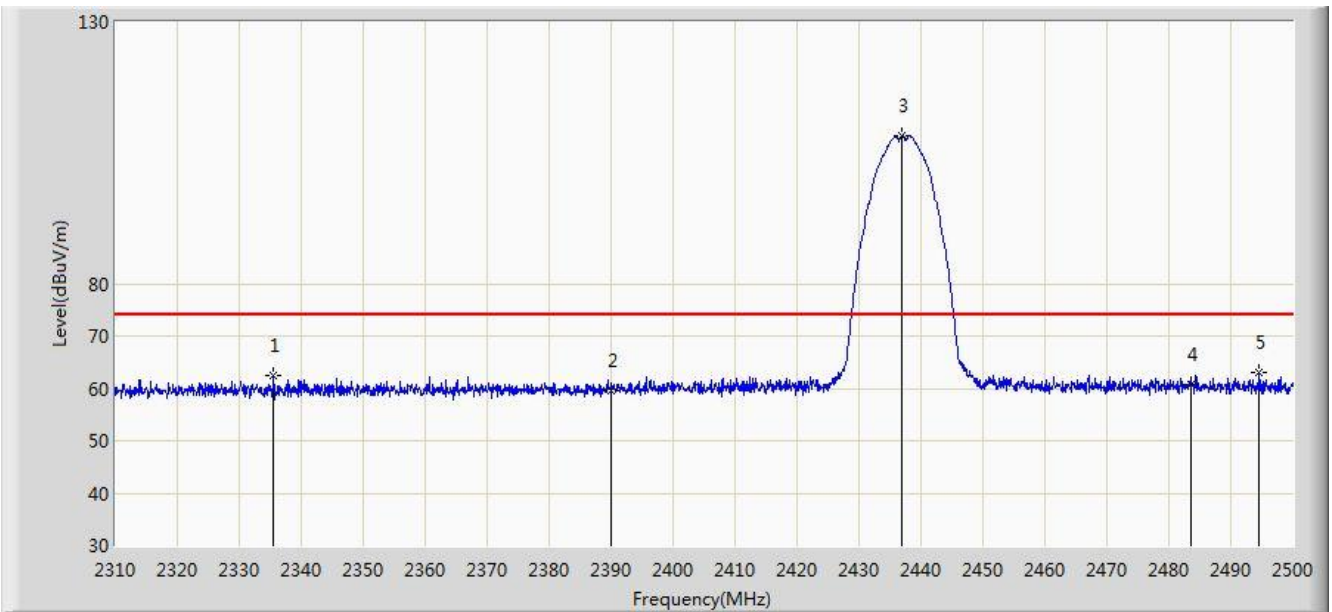


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2335.555	62.341	29.637	-11.659	74.000	32.704	PK
2			2390.000	59.442	26.867	-14.558	74.000	32.575	PK
3			2436.825	108.209	75.694	N/A	N/A	32.516	PK
4			2483.500	60.853	28.257	-13.147	74.000	32.596	PK
5			2494.585	62.939	30.315	-11.061	74.000	32.624	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/09 - 22:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2437MHz (CDD Mode)	

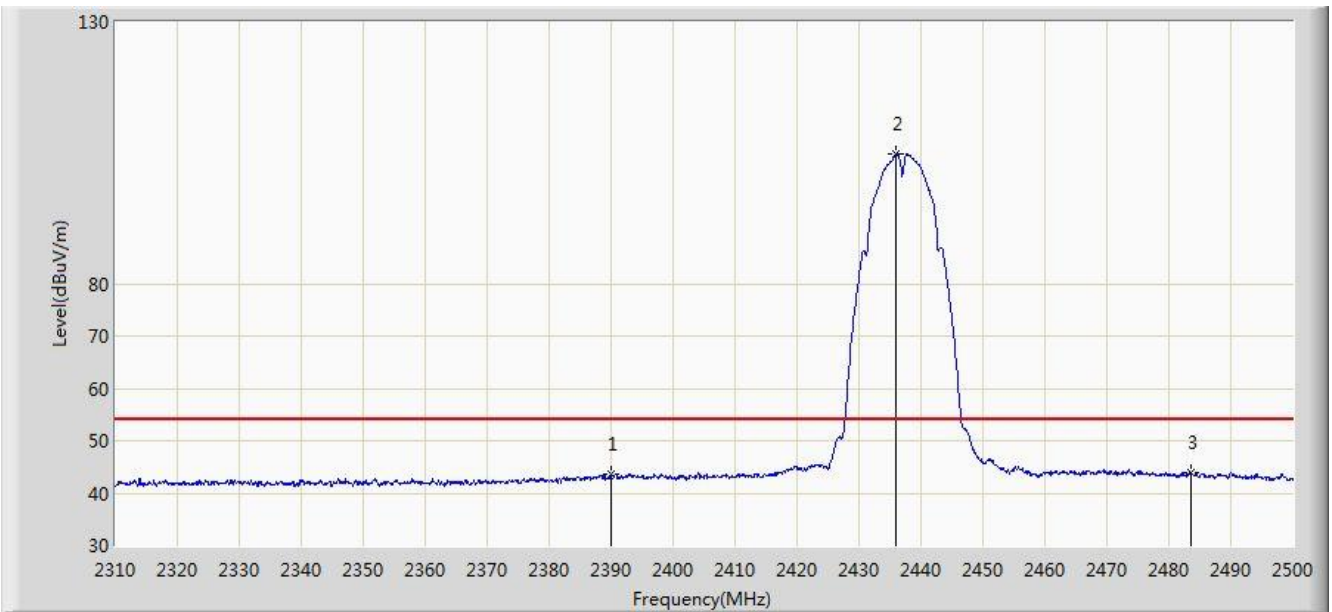


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	43.648	11.073	-10.352	54.000	32.575	AV
2			2436.065	104.737	72.221	N/A	N/A	32.516	AV
3			2483.500	43.869	11.273	-10.131	54.000	32.596	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/09 - 22:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2437MHz (CDD Mode)	

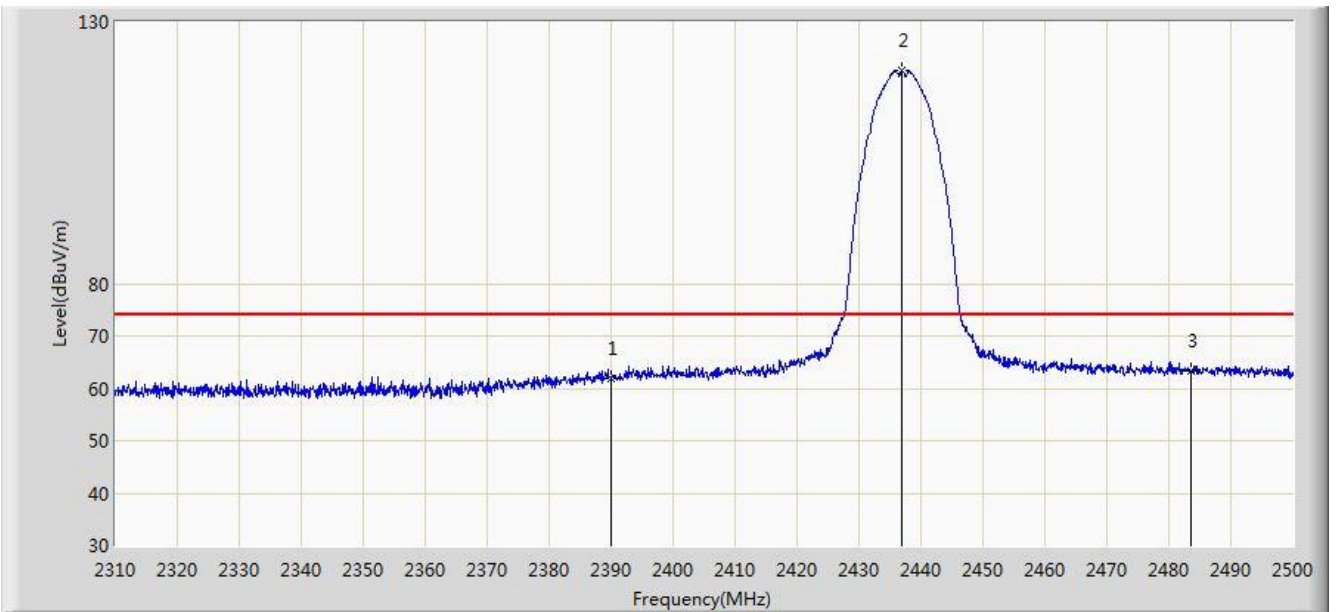


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	61.975	29.400	-12.025	74.000	32.575	PK
2			2436.920	120.589	88.074	N/A	N/A	32.515	PK
3			2483.500	63.278	30.682	-10.722	74.000	32.596	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/09 - 22:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2437MHz (CDD Mode)	

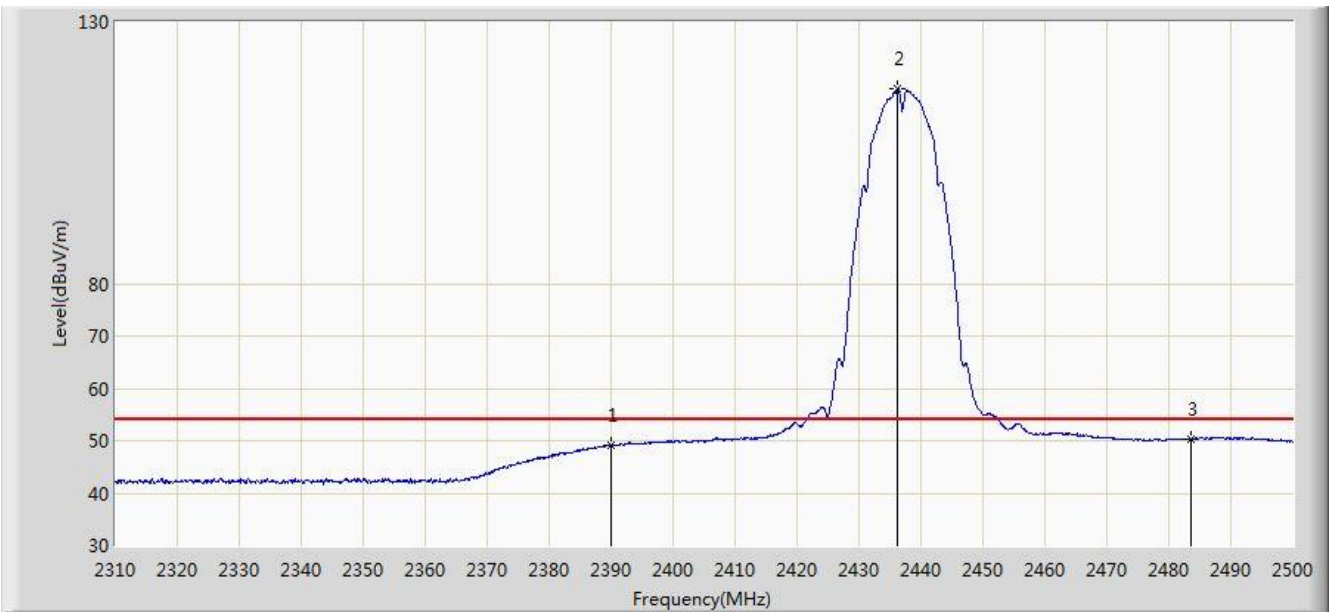


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.139	16.564	-4.861	54.000	32.575	AV
2			2436.255	117.149	84.633	N/A	N/A	32.516	AV
3			2483.500	50.318	17.722	-3.682	54.000	32.596	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/09 - 22:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2462MHz (CDD Mode)	

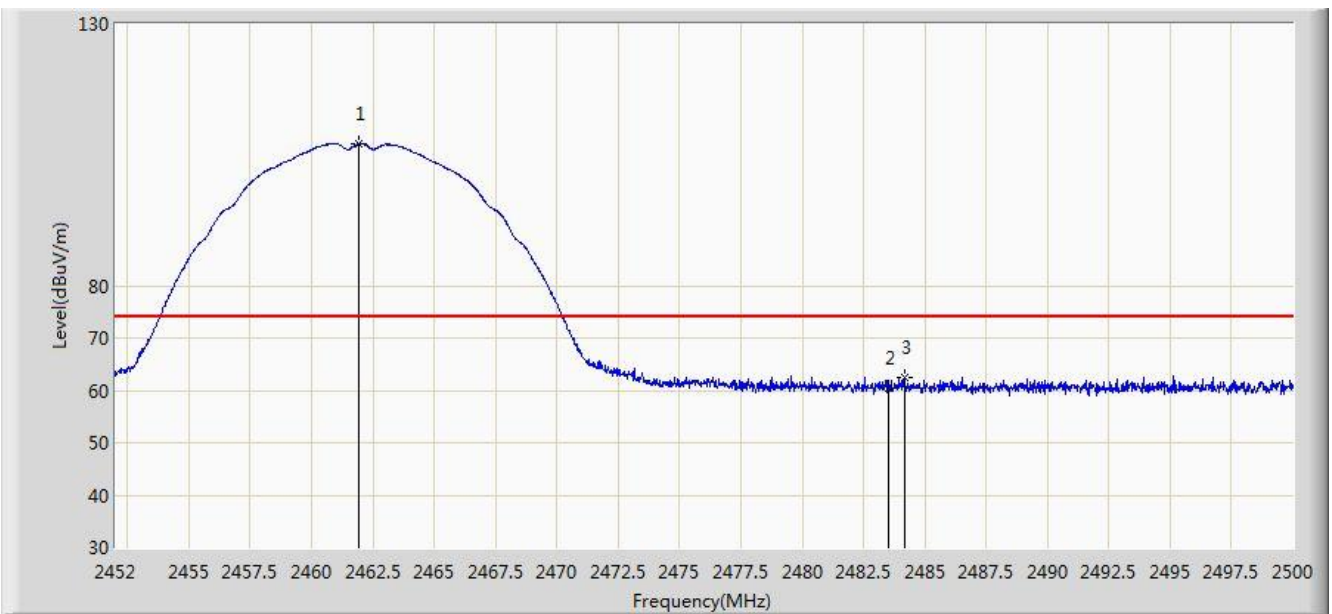

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2461.912	107.102	74.562	N/A	N/A	32.540	PK
2			2483.500	60.337	27.741	-13.663	74.000	32.596	PK
3			2484.184	62.536	29.938	-11.464	74.000	32.598	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/09 - 22:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2462MHz (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2461.312	103.891	71.352	N/A	N/A	32.539	AV
2			2483.500	44.218	11.622	-9.782	54.000	32.596	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/09 - 22:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2462MHz (CDD Mode)	

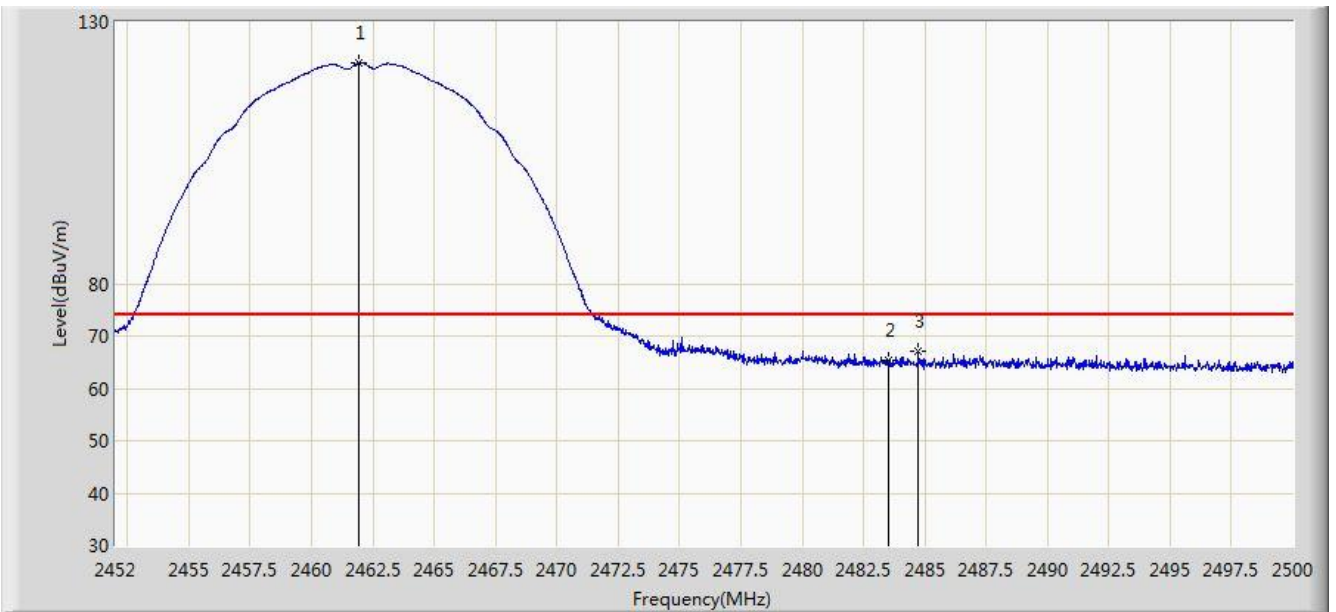

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2461.912	122.127	89.587	N/A	N/A	32.540	PK
2			2483.500	65.233	32.637	-8.767	74.000	32.596	PK
3			2484.736	67.014	34.415	-6.986	74.000	32.599	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/09 - 22:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2462MHz (CDD Mode)	



No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2461.384	118.489	85.950	N/A	N/A	32.539	AV
2			2483.500	51.762	19.166	-2.238	54.000	32.596	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/11 - 12:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2412MHz (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2341.136	63.022	30.343	-10.978	74.000	32.679	PK
2			2390.000	60.311	27.736	-13.689	74.000	32.575	PK
3		*	2417.912	107.886	75.346	N/A	N/A	32.540	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/11 - 12:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2412MHz (CDD Mode)	

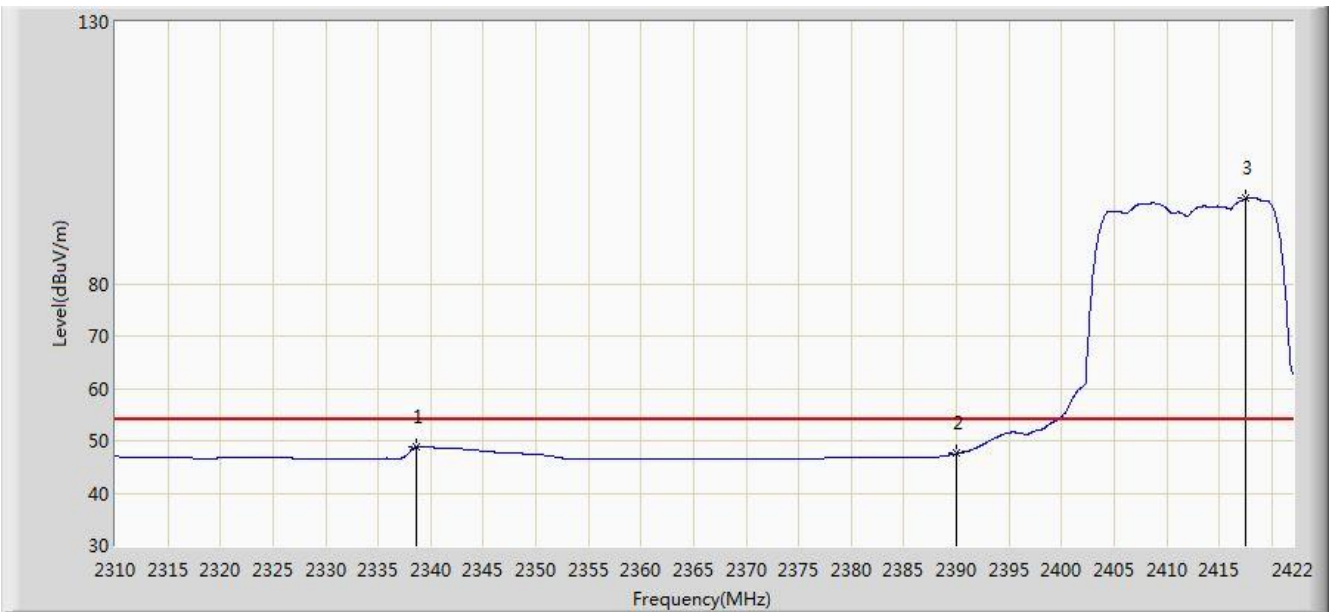

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2338.672	48.799	16.110	-5.201	54.000	32.689	AV
2			2390.000	47.551	14.976	-6.449	54.000	32.575	AV
3		*	2417.576	96.356	63.816	N/A	N/A	32.541	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/11 - 12:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2412MHz (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	68.890	36.315	-5.110	74.000	32.575	PK
2		*	2409.400	117.524	84.973	N/A	N/A	32.551	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/11 - 12:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2412MHz (CDD Mode)	

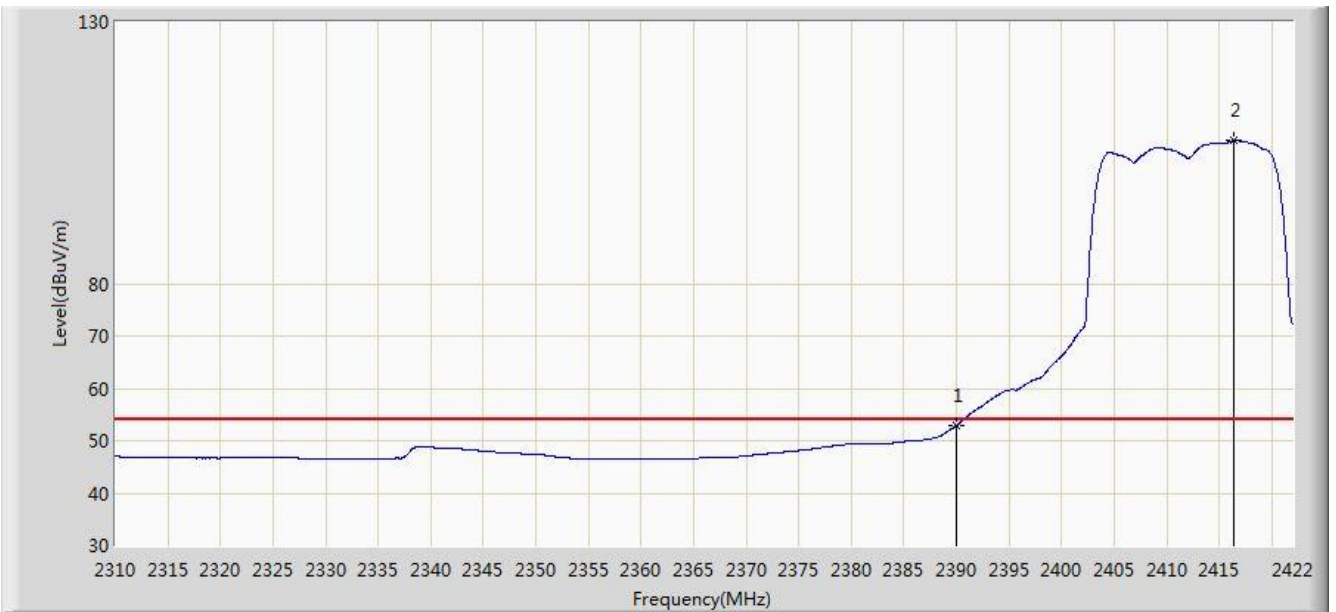

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.938	20.363	-1.062	54.000	32.575	AV
2		*	2416.344	107.306	74.764	N/A	N/A	32.542	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/11 - 12:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2417MHz (CDD Mode) (Worst Polarization)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	70.768	38.193	-3.232	74.000	32.575	PK
2			2410.035	119.185	86.635	N/A	N/A	32.551	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2018/08/11 - 12:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2417MHz (CDD Mode) (Worst Polarization)	

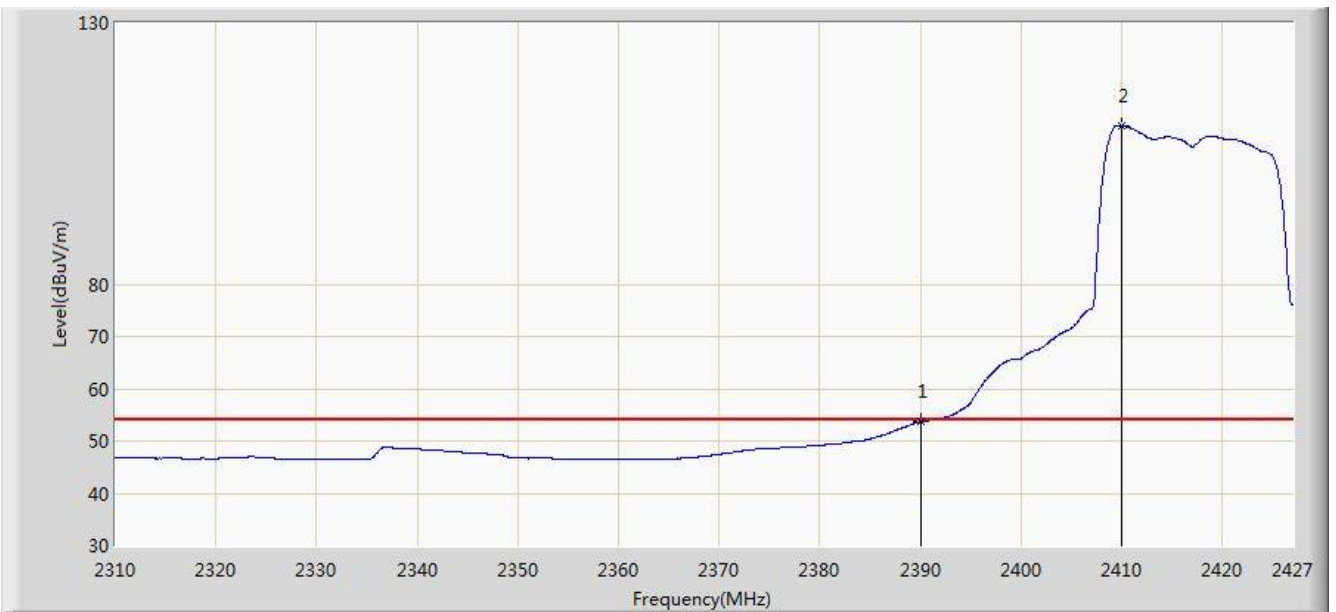


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.704	21.129	-0.296	54.000	32.575	AV
2			2409.977	110.281	77.731	N/A	N/A	32.551	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2018/08/09 - 23:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2422MHz (CDD Mode) (Worst Polarization)	

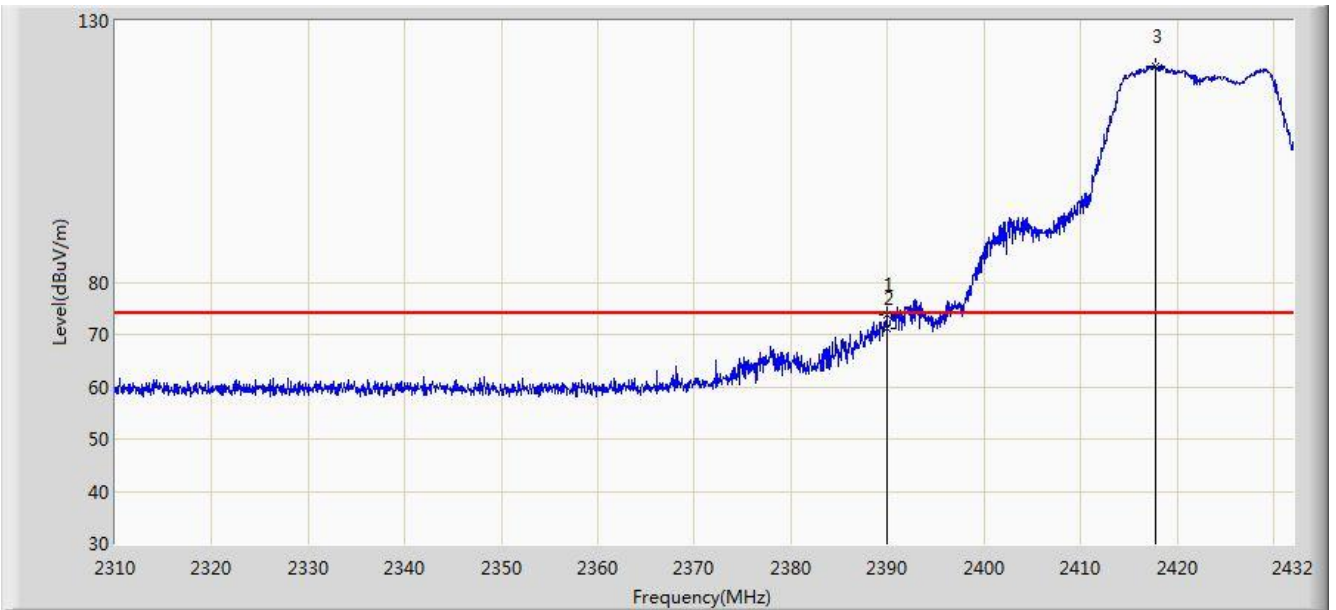


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.910	73.675	41.100	-0.325	74.000	32.575	PK
2			2390.000	71.062	38.487	-2.938	74.000	32.575	PK
3			2417.726	121.437	88.897	N/A	N/A	32.540	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2018/08/09 - 23:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2422MHz (CDD Mode) (Worst Polarization)	

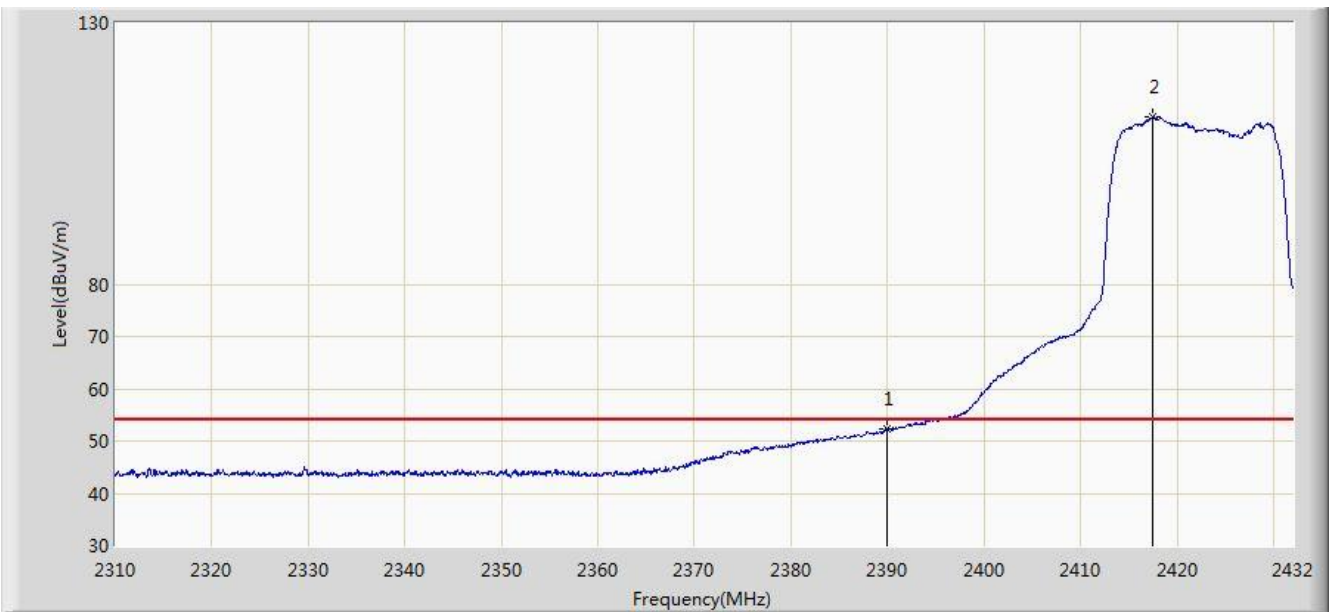


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.273	19.698	-1.727	54.000	32.575	AV
2			2417.543	112.075	79.535	N/A	N/A	32.541	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2018/08/09 - 22:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2437MHz (CDD Mode)	

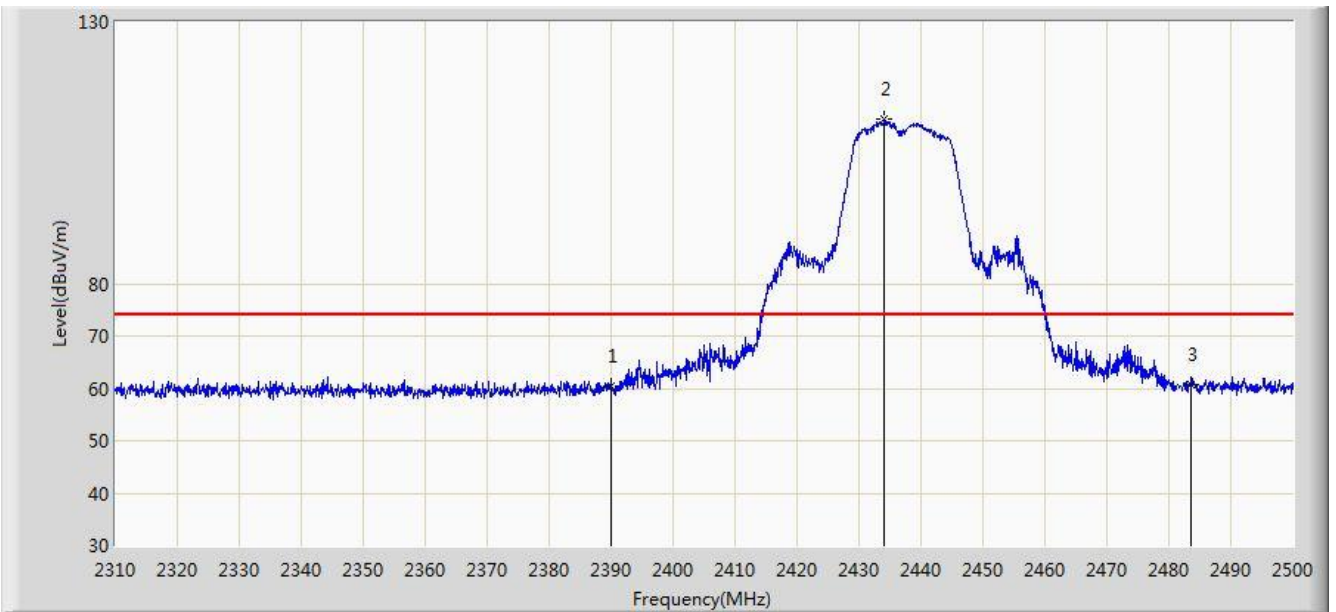


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	60.488	27.913	-13.512	74.000	32.575	PK
2			2434.070	111.351	78.832	N/A	N/A	32.518	PK
3			2483.500	60.600	28.004	-13.400	74.000	32.596	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/09 - 22:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2437MHz (CDD Mode)	

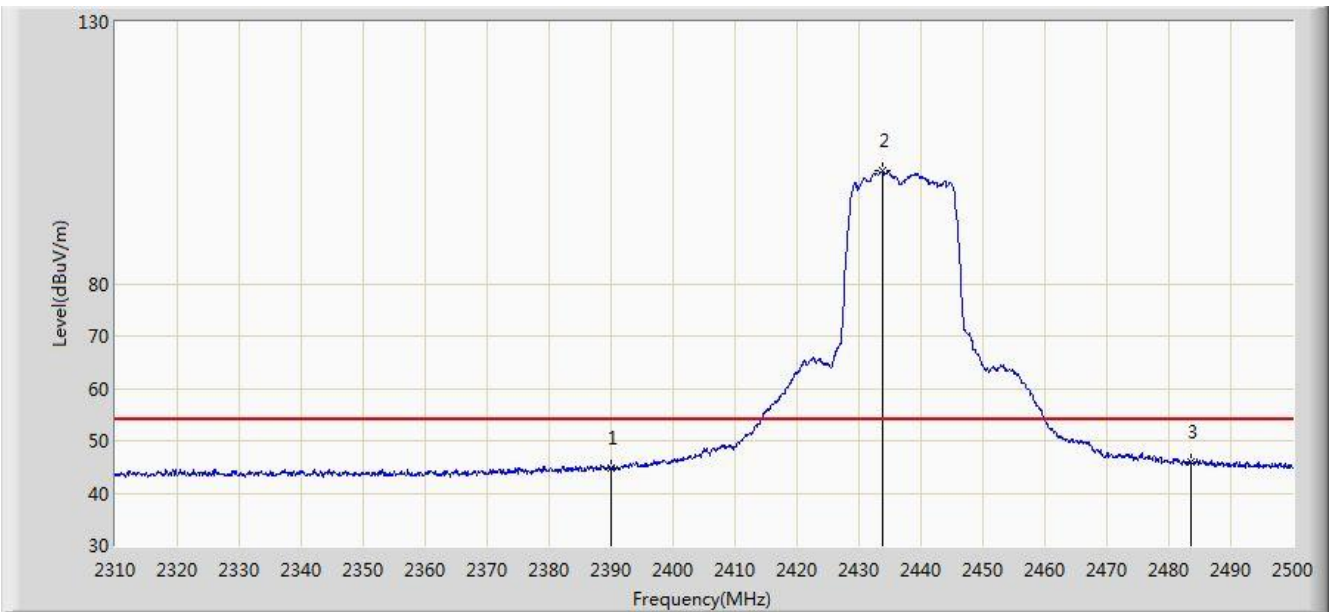


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.656	12.081	-9.344	54.000	32.575	AV
2			2433.880	101.593	69.074	N/A	N/A	32.519	AV
3			2483.500	45.972	13.376	-8.028	54.000	32.596	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/09 - 22:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2437MHz (CDD Mode)	

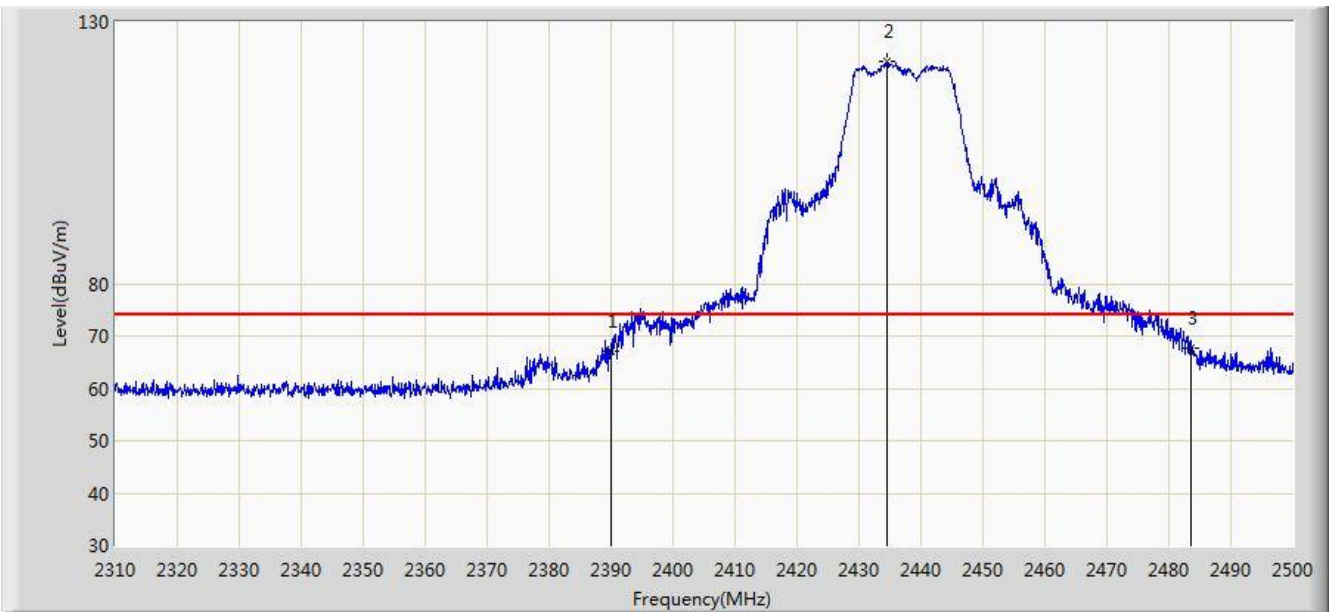


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	67.210	34.635	-6.790	74.000	32.575	PK
2			2434.450	122.363	89.845	N/A	N/A	32.518	PK
3			2483.500	67.802	35.206	-6.198	74.000	32.596	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/09 - 22:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2437MHz (CDD Mode)	

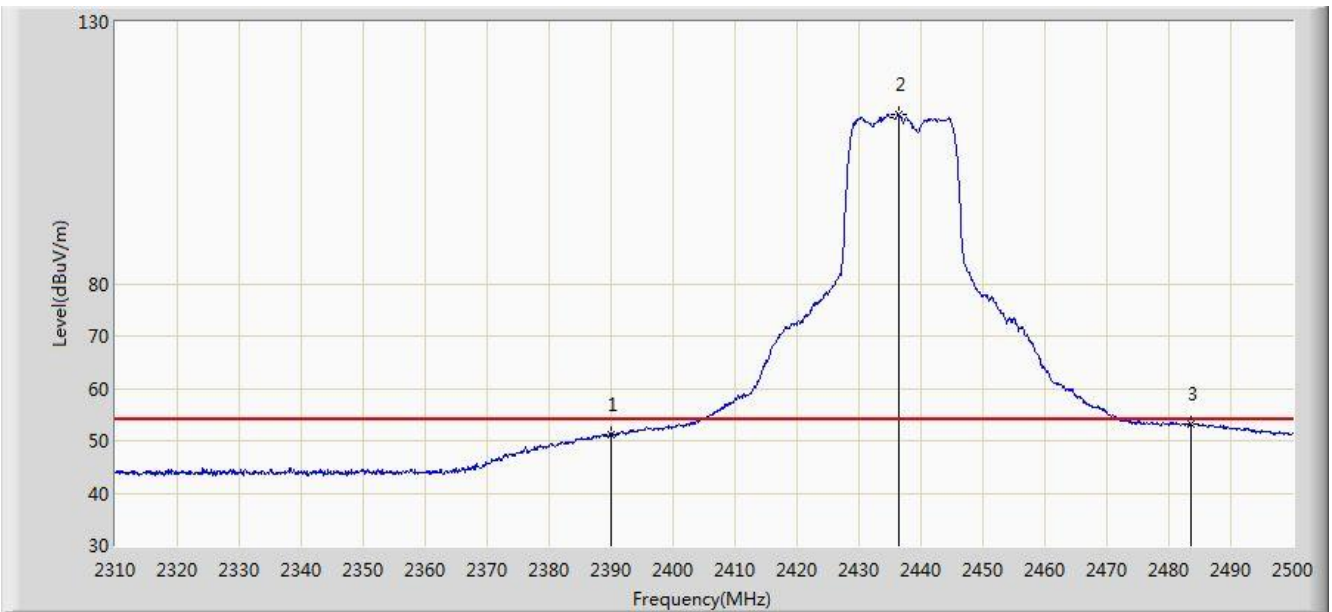


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	51.303	18.728	-2.697	54.000	32.575	AV
2			2436.350	112.351	79.835	N/A	N/A	32.516	AV
3			2483.500	53.130	20.534	-0.870	54.000	32.596	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/09 - 23:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2452MHz (CDD Mode) (Worst Polarization)	

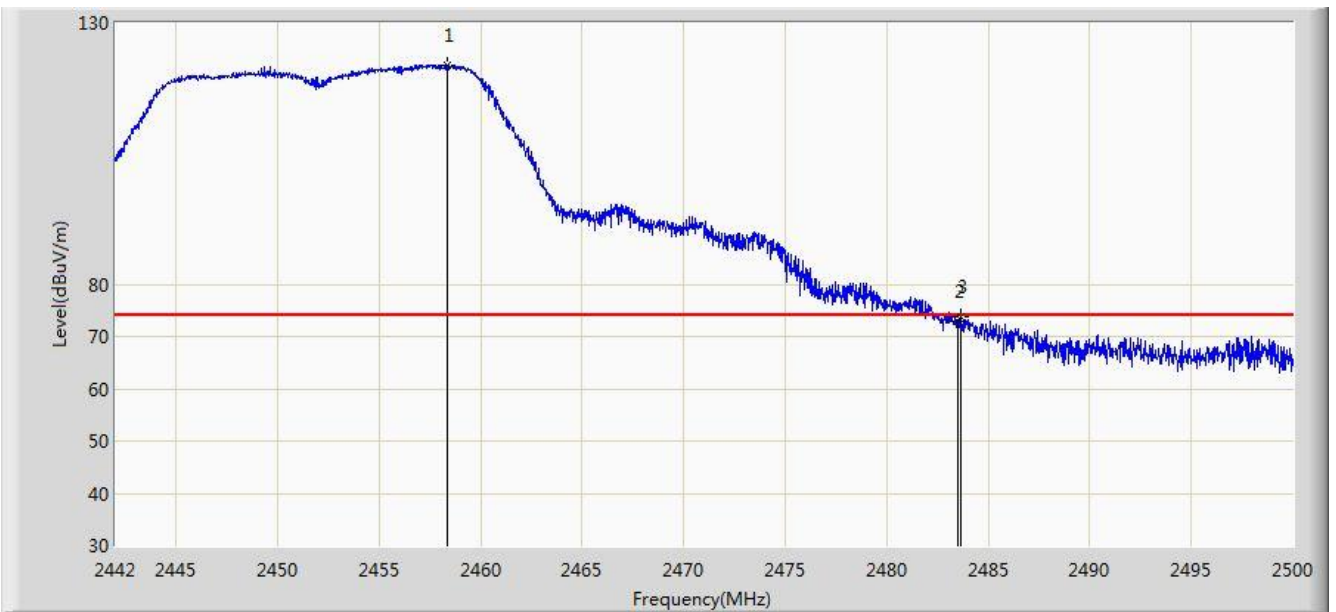


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2458.385	121.828	89.296	N/A	N/A	32.532	PK
2			2483.500	72.979	40.383	-1.021	74.000	32.596	PK
3			2483.644	73.663	41.067	-0.337	74.000	32.596	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2018/08/09 - 23:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2452MHz (CDD Mode) (Worst Polarization)	

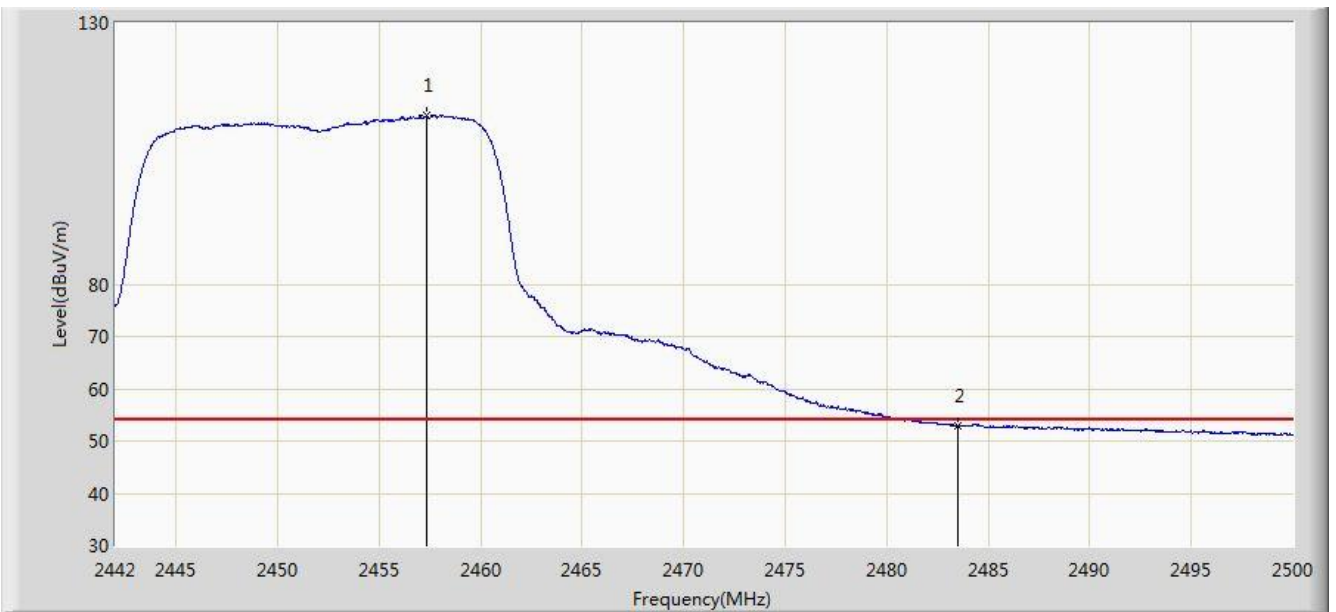


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2457.370	112.181	79.651	N/A	N/A	32.530	AV
2			2483.500	52.890	20.294	-1.110	54.000	32.596	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2018/08/11 - 12:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2457MHz (CDD Mode) (Worst Polarization)	

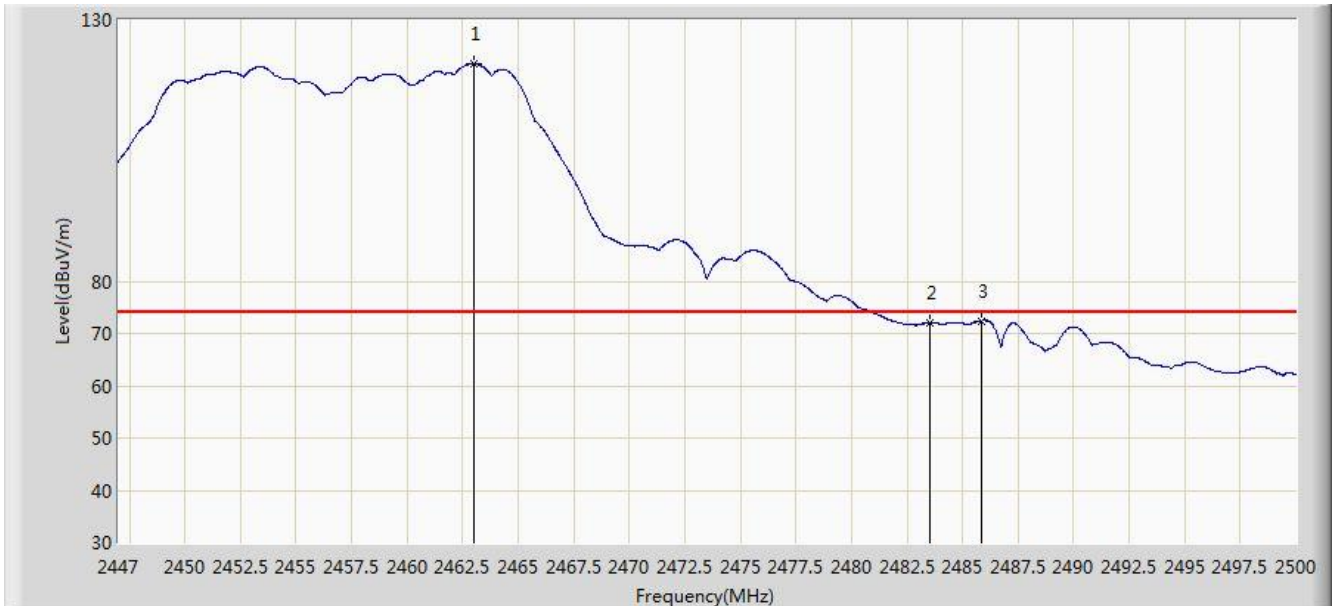


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2463.032	121.560	89.018	N/A	N/A	32.542	PK
2			2483.500	71.957	39.361	-2.043	74.000	32.596	PK
3			2485.823	72.409	39.807	-1.591	74.000	32.602	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2018/08/11 - 12:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2457MHz (CDD Mode) (Worst Polarization)	

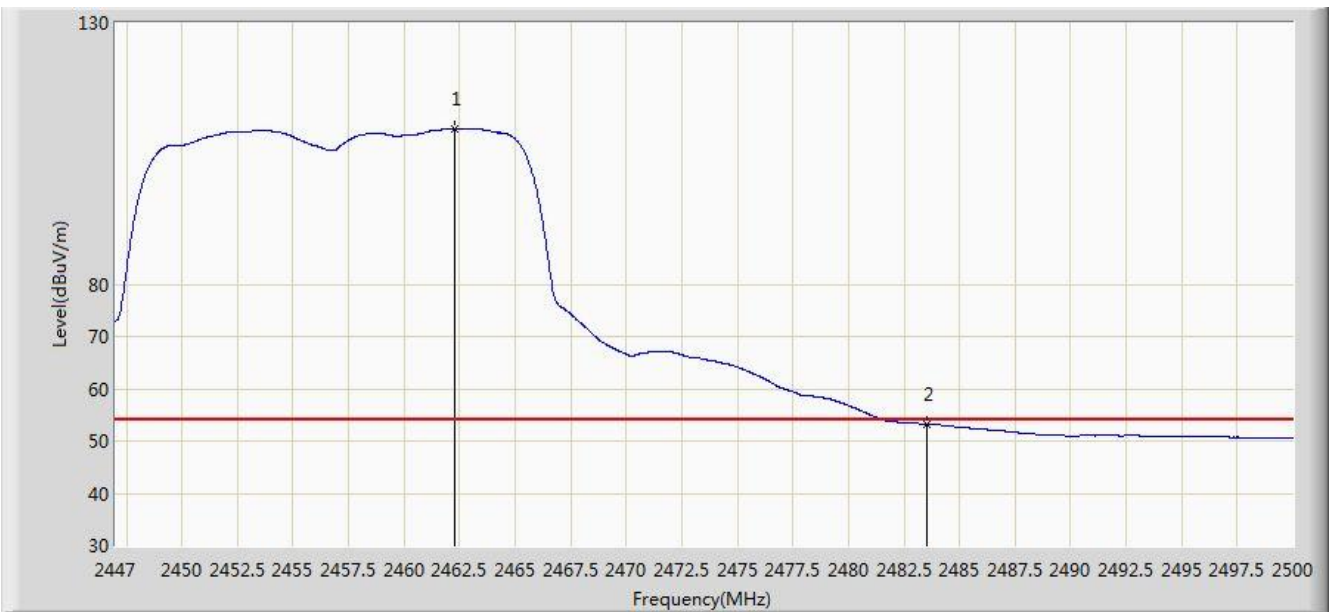

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2462.291	109.673	77.132	N/A	N/A	32.541	AV
2			2483.500	53.266	20.670	-0.734	54.000	32.596	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2018/08/11 - 12:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2462MHz (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2458.768	107.514	74.981	N/A	N/A	32.533	PK
2			2483.500	59.963	27.367	-14.037	74.000	32.596	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/11 - 12:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2462MHz (CDD Mode)	

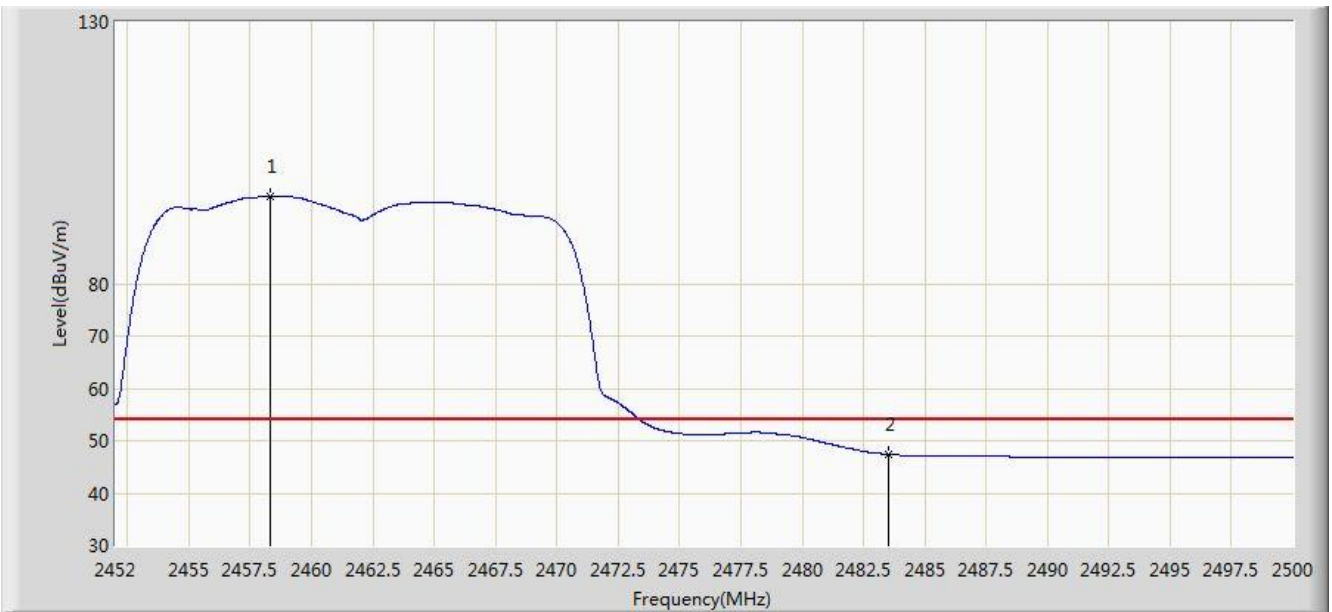

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2458.312	96.713	64.181	N/A	N/A	32.532	AV
2			2483.500	47.408	14.812	-6.592	54.000	32.596	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/11 - 12:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2462MHz (CDD Mode)	



No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2458.168	118.695	86.163	N/A	N/A	32.532	PK
2			2483.500	69.311	36.715	-4.689	74.000	32.596	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/11 - 12:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2462MHz (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2457.352	107.175	74.645	N/A	N/A	32.530	AV
2			2483.500	51.701	19.105	-2.299	54.000	32.596	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/09 - 23:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz (CDD Mode)	

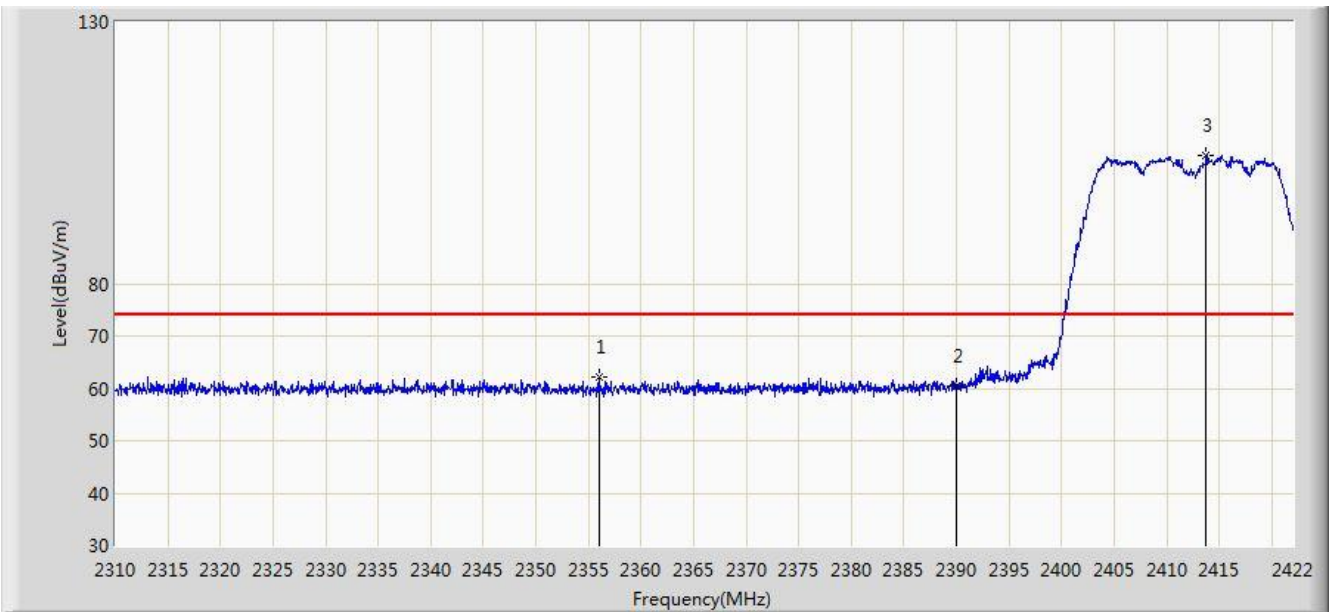


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2355.976	62.045	29.414	-11.955	74.000	32.632	PK
2			2390.000	60.382	27.807	-13.618	74.000	32.575	PK
3			2413.768	104.382	71.837	N/A	N/A	32.546	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/09 - 23:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz (CDD Mode)	

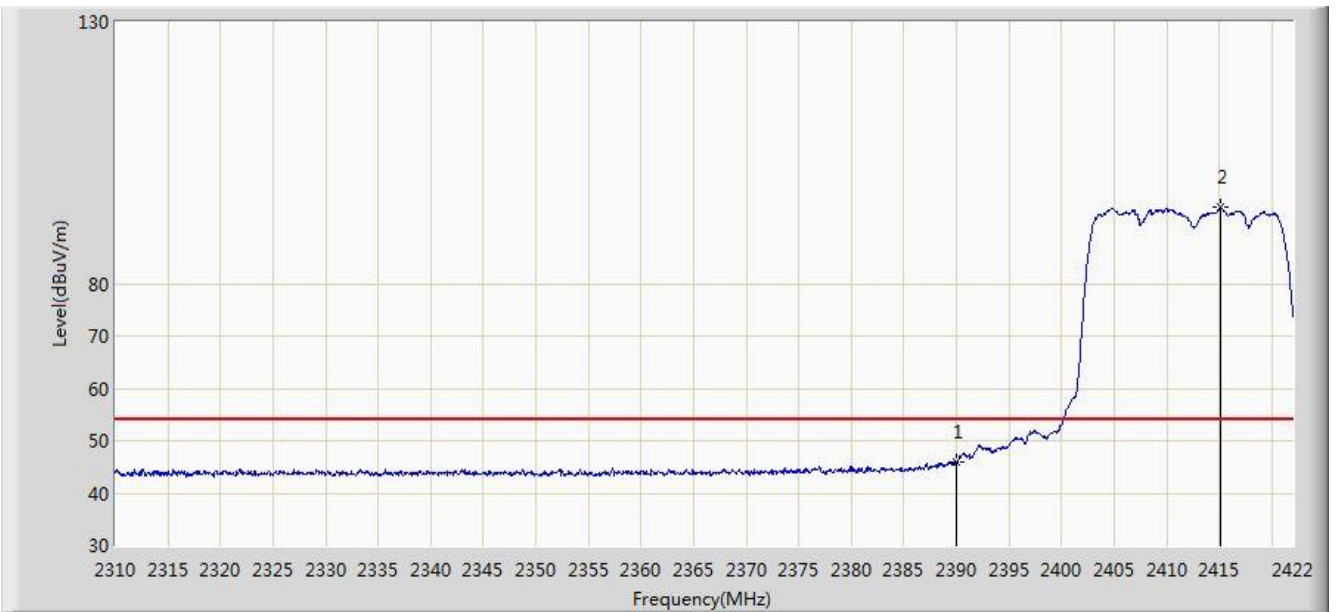


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.040	13.465	-7.960	54.000	32.575	AV
2			2415.112	94.523	61.979	N/A	N/A	32.544	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/09 - 23:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz (CDD Mode)	

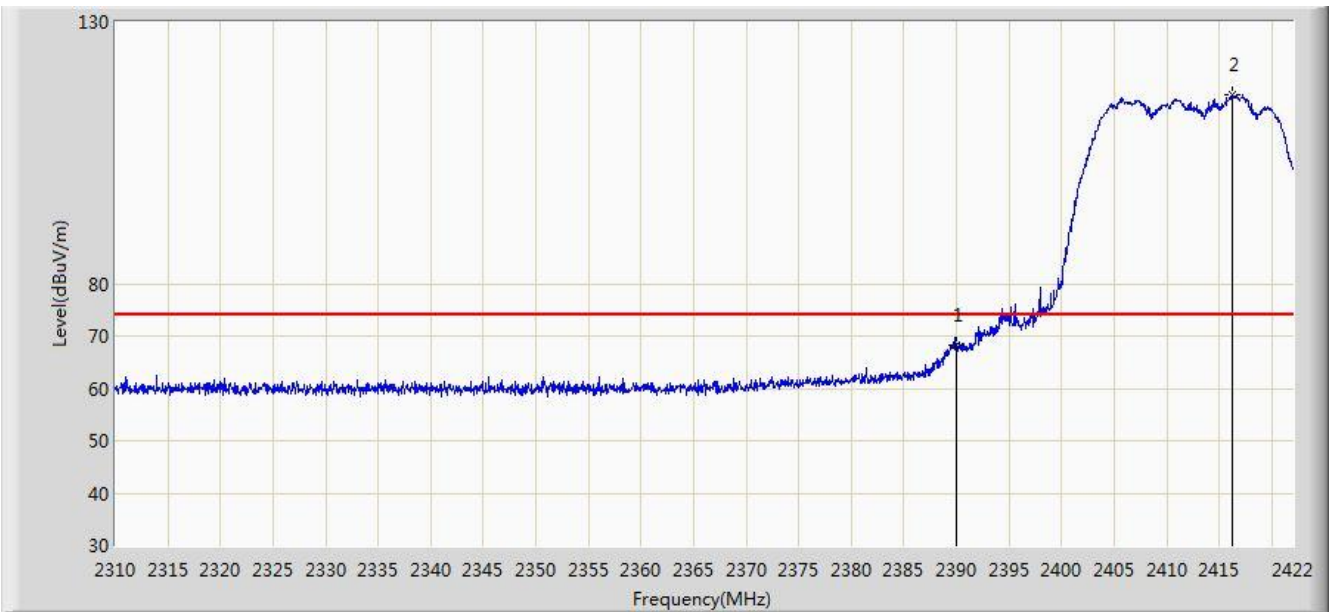


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	68.126	35.551	-5.874	74.000	32.575	PK
2			2416.288	115.956	83.414	N/A	N/A	32.542	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/09 - 23:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz (CDD Mode)	

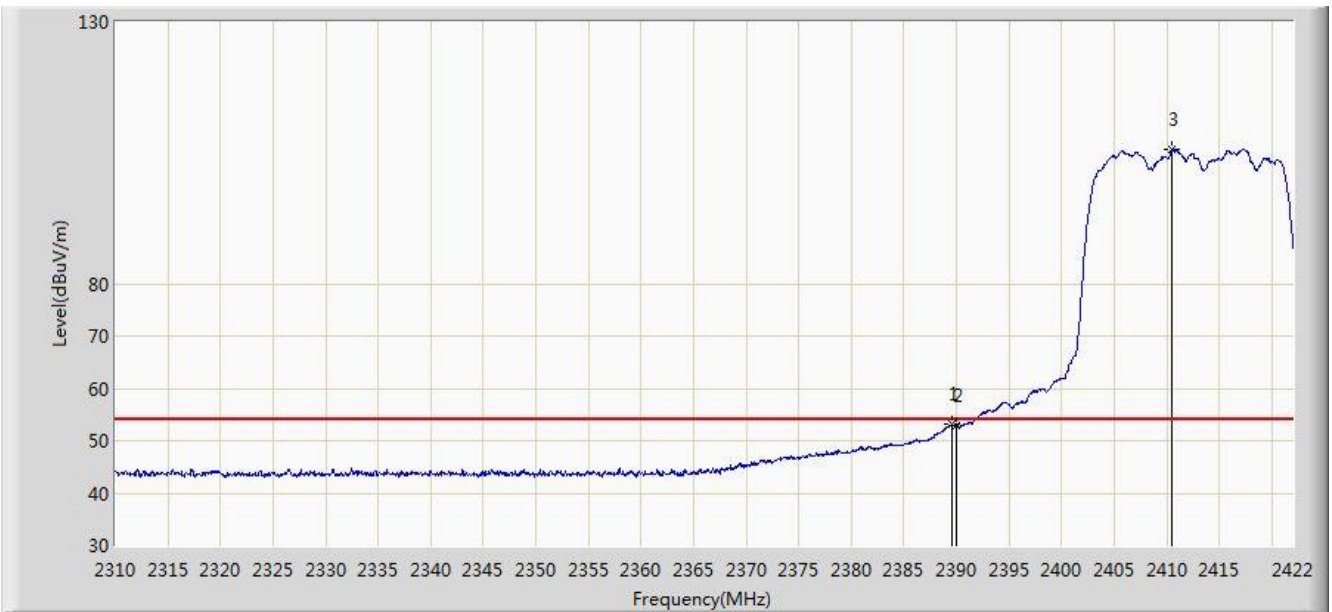


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.520	53.069	20.494	-0.931	54.000	32.575	AV
2			2390.000	53.019	20.444	-0.981	54.000	32.575	AV
3			2410.520	105.778	73.228	N/A	N/A	32.549	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/09 - 23:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2417MHz (CDD Mode) (Worst Polarization)	

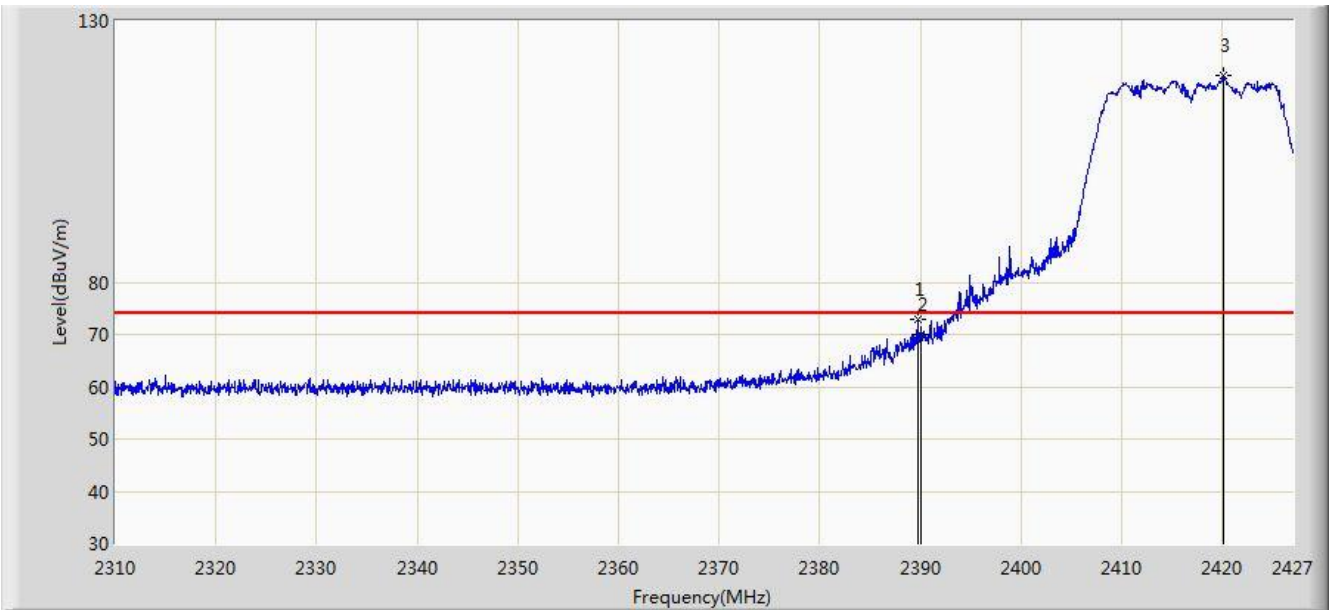


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.736	72.924	40.349	-1.076	74.000	32.574	PK
2			2390.000	70.088	37.513	-3.912	74.000	32.575	PK
3			2420.156	119.597	87.060	N/A	N/A	32.537	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2018/08/09 - 23:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2417MHz (CDD Mode) (Worst Polarization)	

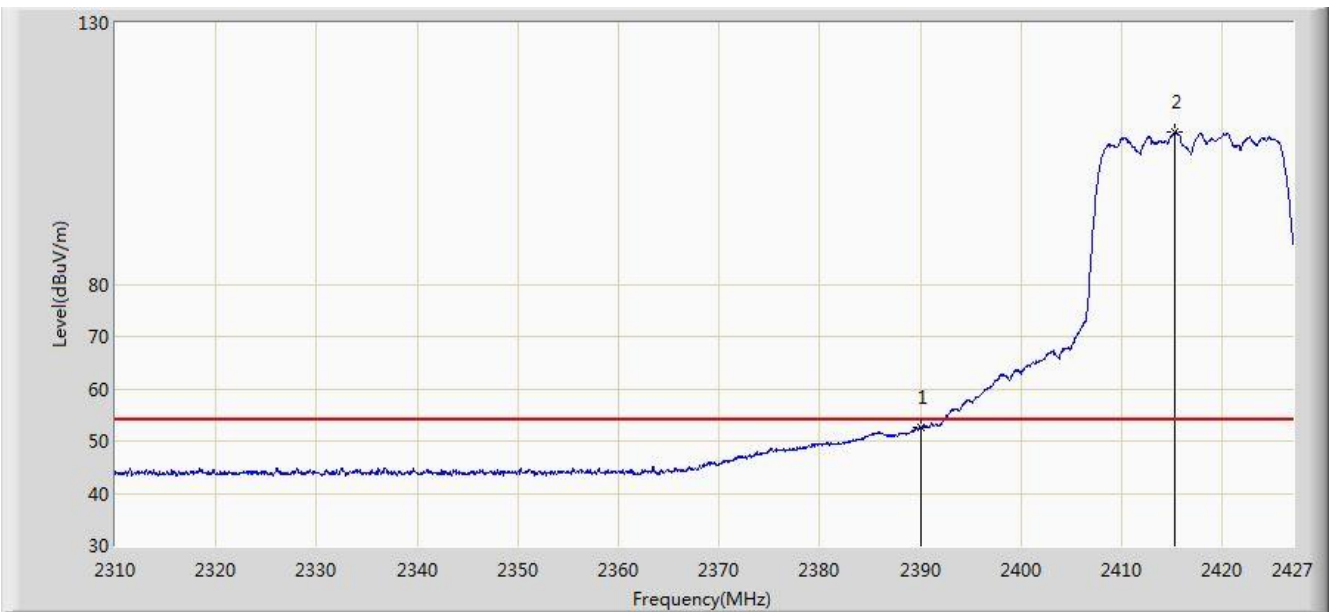


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.467	19.892	-1.533	54.000	32.575	AV
2			2415.300	109.147	76.604	N/A	N/A	32.543	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2018/08/09 - 23:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz (CDD Mode)	

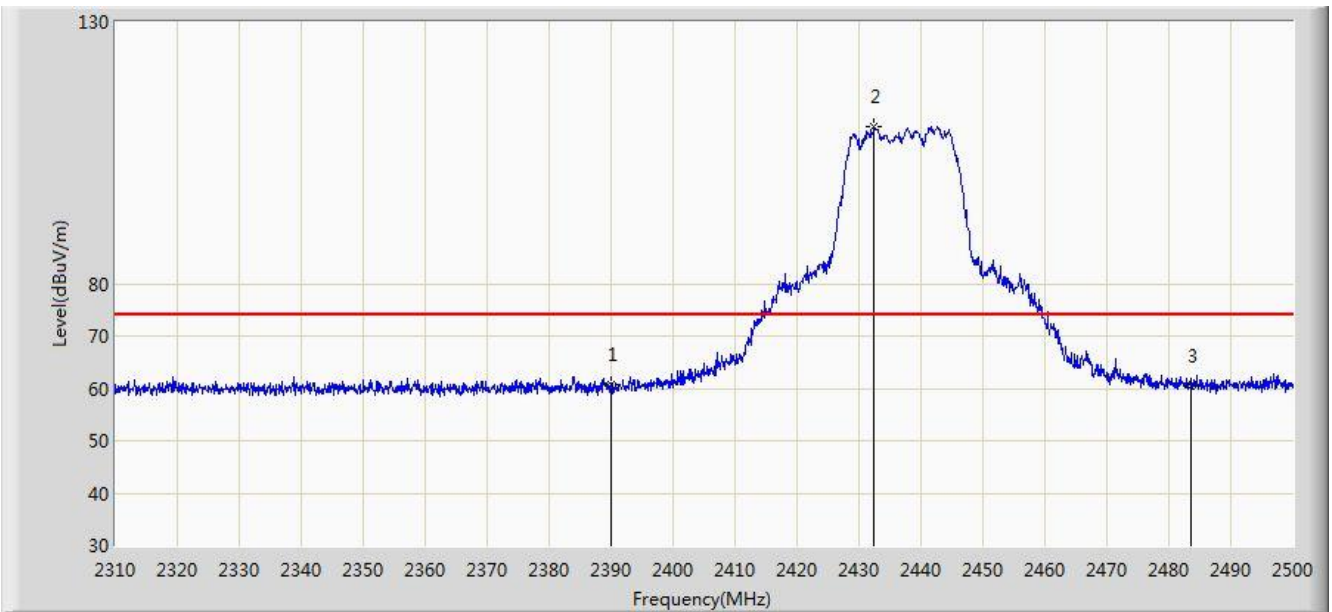


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	60.628	28.053	-13.372	74.000	32.575	PK
2			2432.360	110.007	77.486	N/A	N/A	32.520	PK
3			2483.500	60.416	27.820	-13.584	74.000	32.596	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/09 - 23:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz (CDD Mode)	

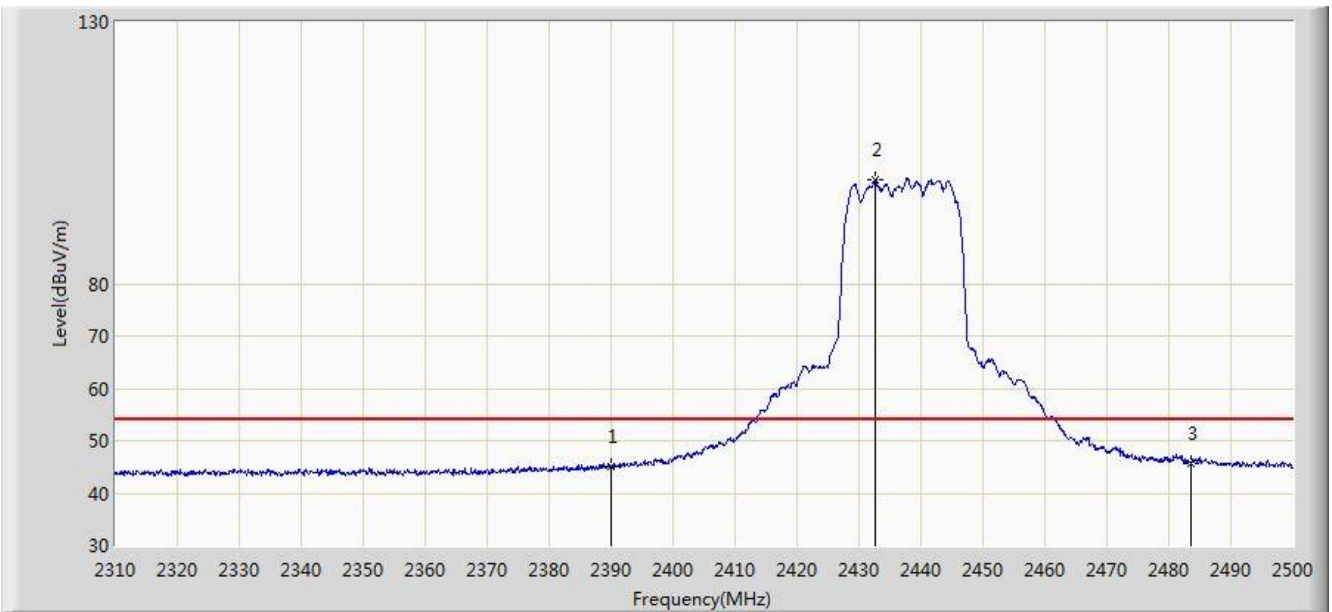


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	45.204	12.629	-8.796	54.000	32.575	AV
2			2432.645	99.855	67.335	N/A	N/A	32.521	AV
3			2483.500	45.710	13.114	-8.290	54.000	32.596	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/09 - 23:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz (CDD Mode)	

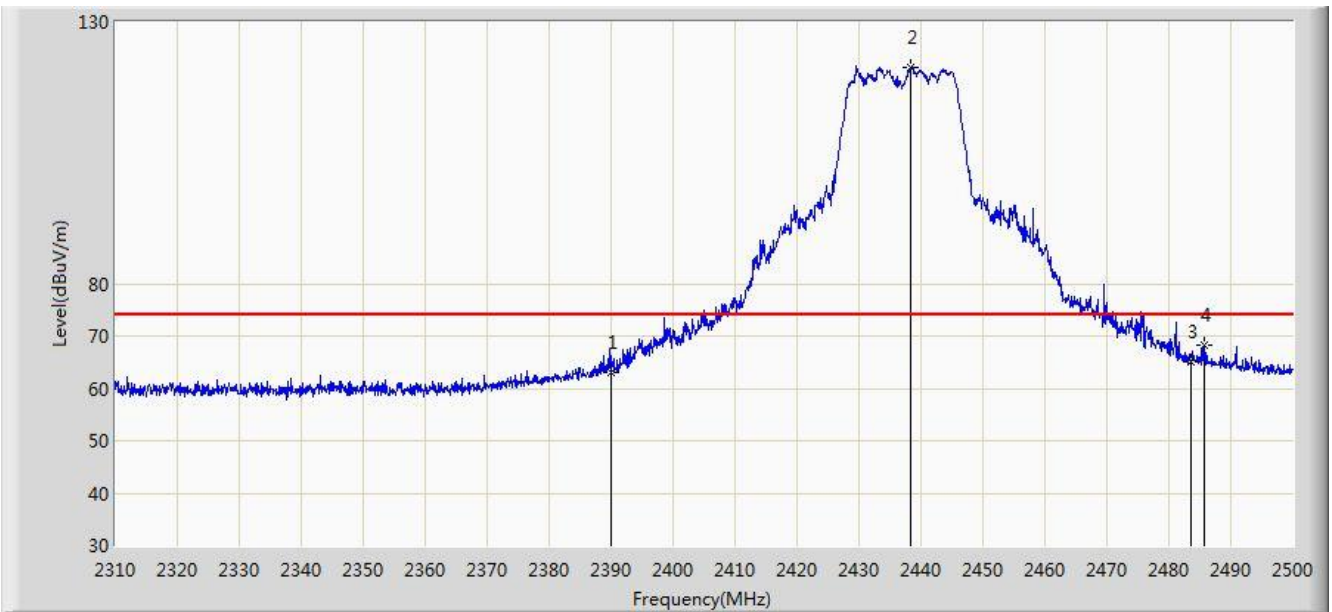


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	63.140	30.565	-10.860	74.000	32.575	PK
2			2438.345	121.292	88.778	N/A	N/A	32.514	PK
3			2483.500	65.109	32.513	-8.891	74.000	32.596	PK
4			2485.750	68.220	35.619	-5.780	74.000	32.602	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/09 - 23:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz (CDD Mode)	

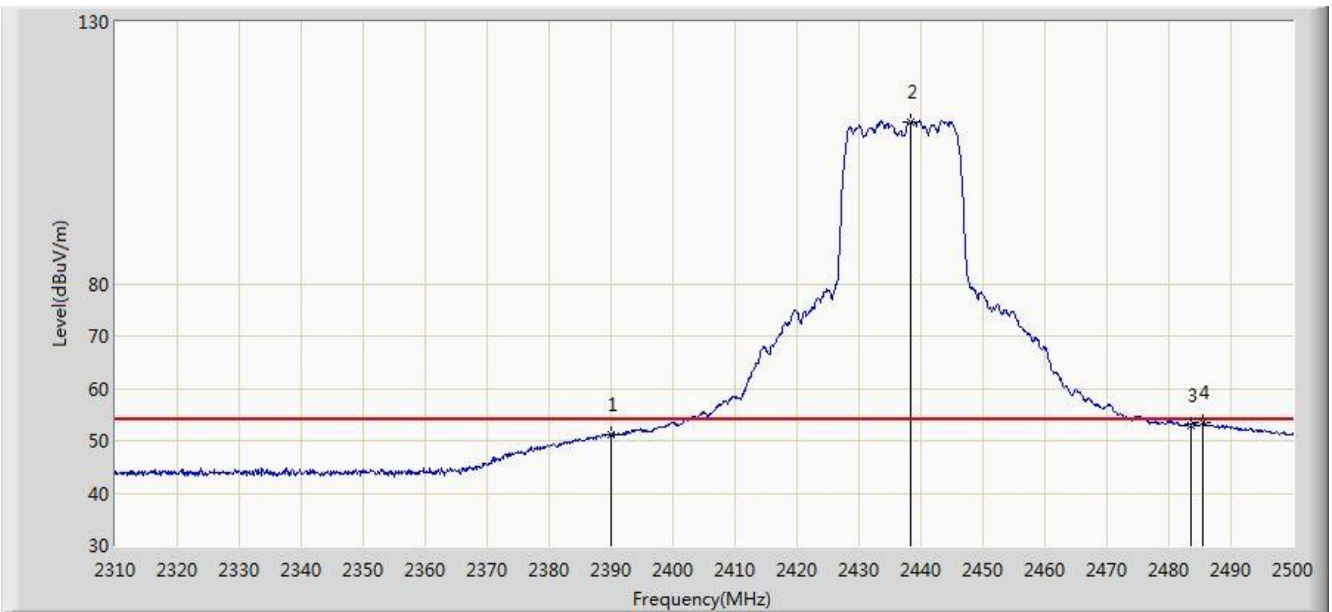


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	51.123	18.548	-2.877	54.000	32.575	AV
2			2438.440	110.911	78.397	N/A	N/A	32.514	AV
3			2483.500	53.040	20.444	-0.960	54.000	32.596	AV
4			2485.465	53.470	20.869	-0.530	54.000	32.601	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/09 - 23:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2457MHz (CDD Mode) (Worst Polarization)	

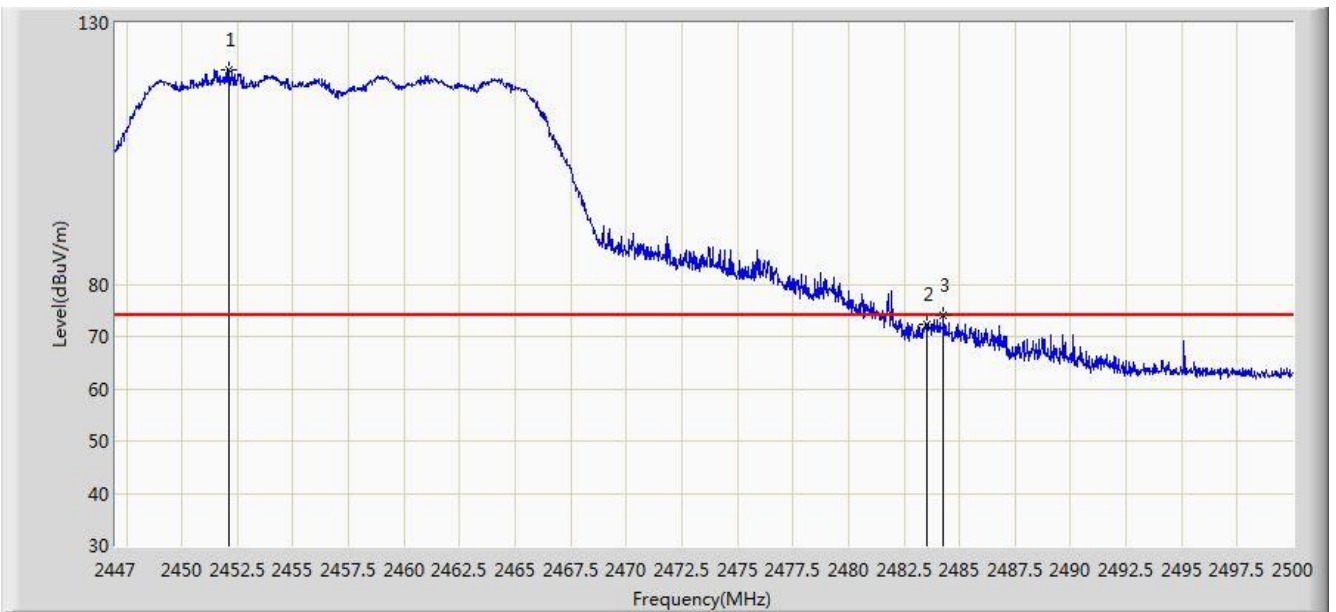


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2452.115	120.983	88.465	N/A	N/A	32.518	PK
2			2483.500	72.295	39.699	-1.705	74.000	32.596	PK
3			2484.285	73.978	41.380	-0.022	74.000	32.598	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2018/08/09 - 23:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2457MHz (CDD Mode) (Worst Polarization)	

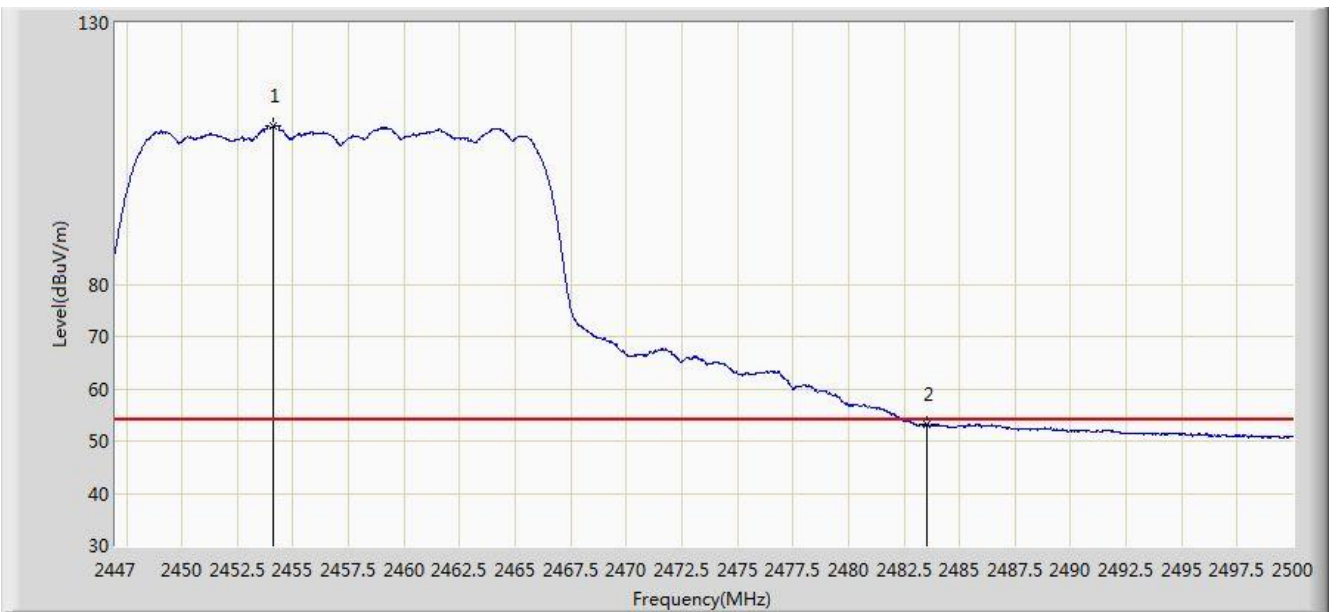


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2454.102	110.306	77.783	N/A	N/A	32.522	AV
2			2483.500	53.064	20.468	-0.936	54.000	32.596	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2018/08/09 - 23:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz (CDD Mode)	

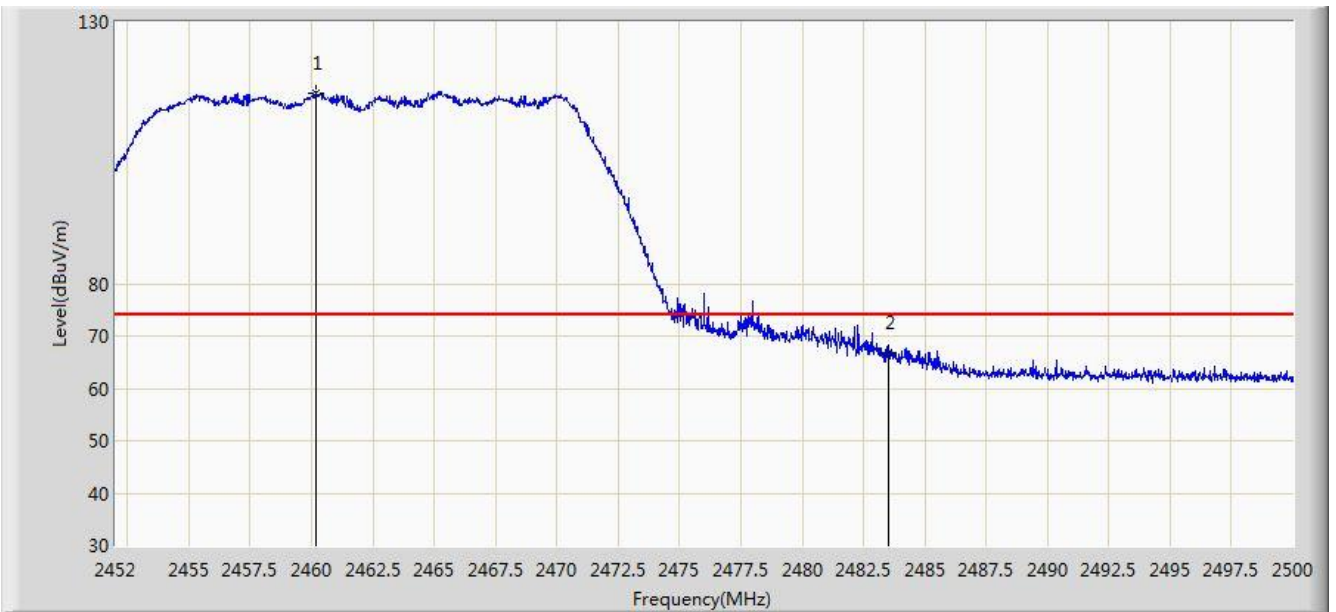


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2460.184	116.517	83.981	N/A	N/A	32.537	PK
2			2483.500	66.680	34.084	-7.320	74.000	32.596	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/09 - 23:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz (CDD Mode)	

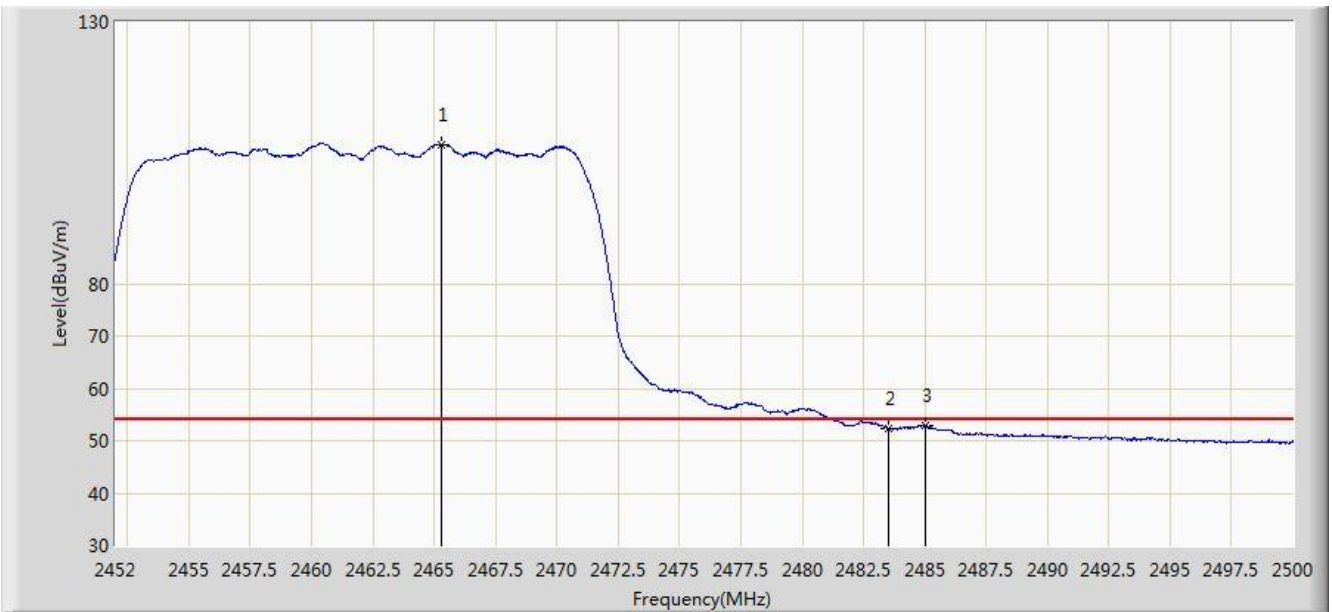


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2465.272	106.662	74.114	N/A	N/A	32.548	AV
2			2483.500	52.296	19.700	-1.704	54.000	32.596	AV
3			2485.048	52.854	20.254	-1.146	54.000	32.599	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/09 - 23:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz (CDD Mode)	

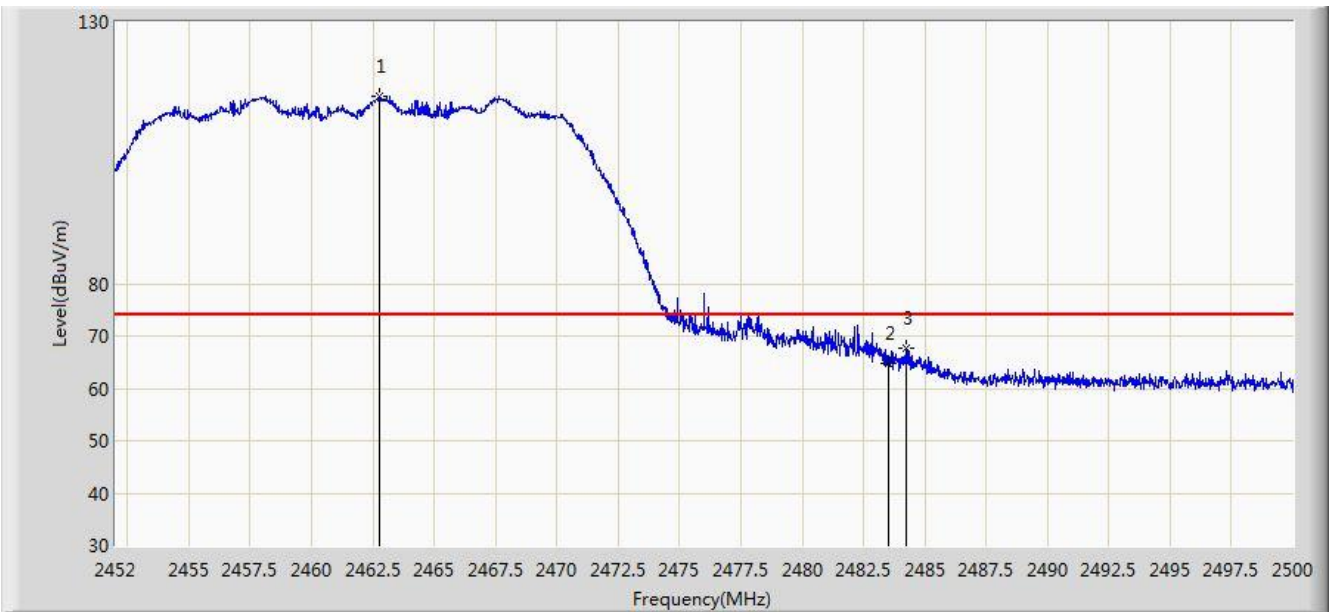


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.776	115.669	83.127	N/A	N/A	32.542	PK
2			2483.500	64.919	32.323	-9.081	74.000	32.596	PK
3			2484.232	67.538	34.940	-6.462	74.000	32.598	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/09 - 23:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz (CDD Mode)	

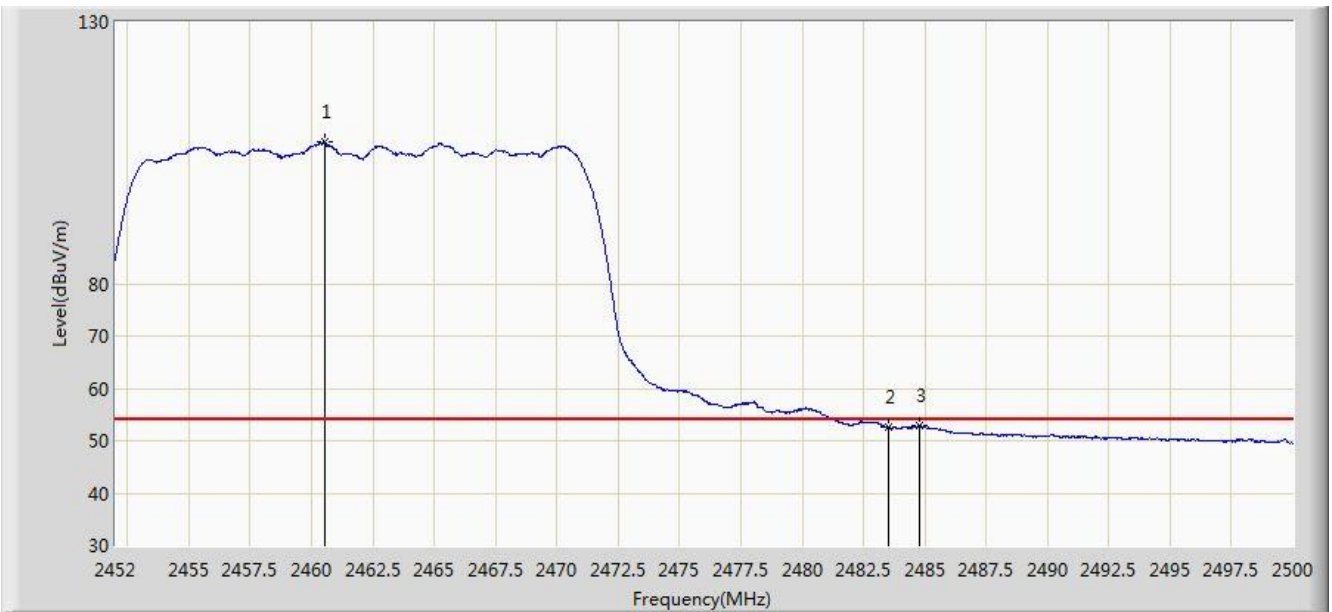


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2460.568	106.968	74.431	N/A	N/A	32.537	AV
2			2483.500	52.535	19.939	-1.465	54.000	32.596	AV
3			2484.784	52.932	20.333	-1.068	54.000	32.599	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/09 - 23:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz (CDD Mode)	

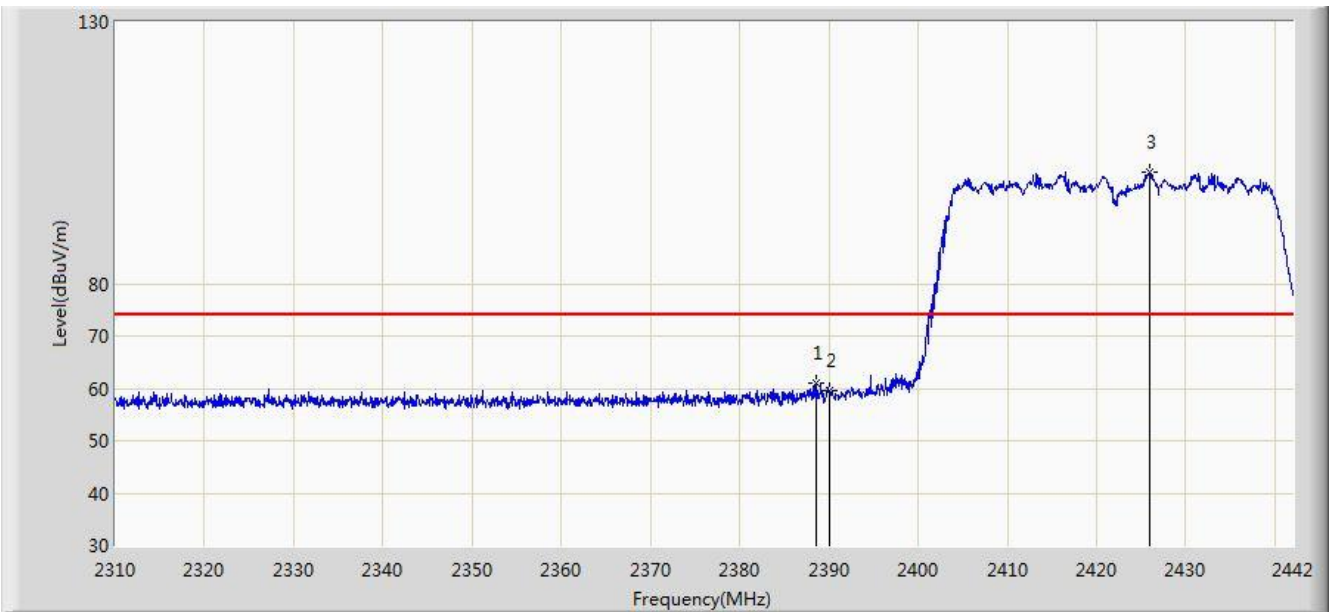


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.606	61.009	28.432	-12.991	74.000	32.577	PK
2			2390.000	59.498	26.923	-14.502	74.000	32.575	PK
3			2425.896	101.378	68.849	N/A	N/A	32.529	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/09 - 23:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz (CDD Mode)	

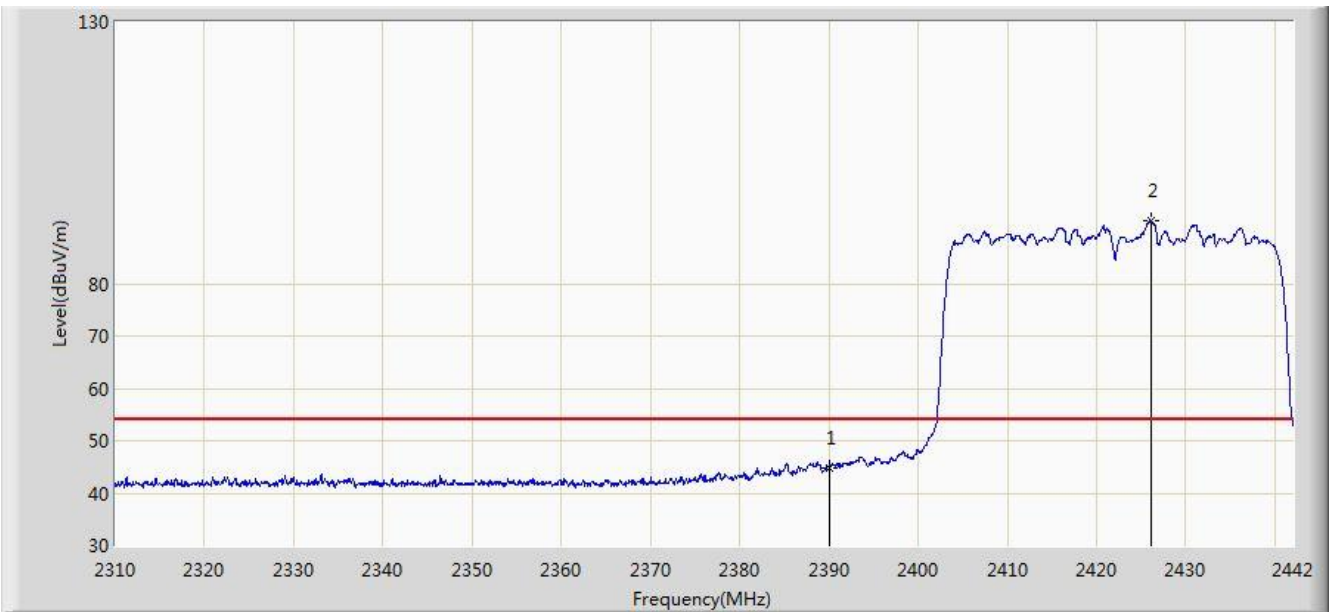


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.914	12.339	-9.086	54.000	32.575	AV
2			2426.094	91.996	59.467	N/A	N/A	32.528	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/09 - 23:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz (CDD Mode)	

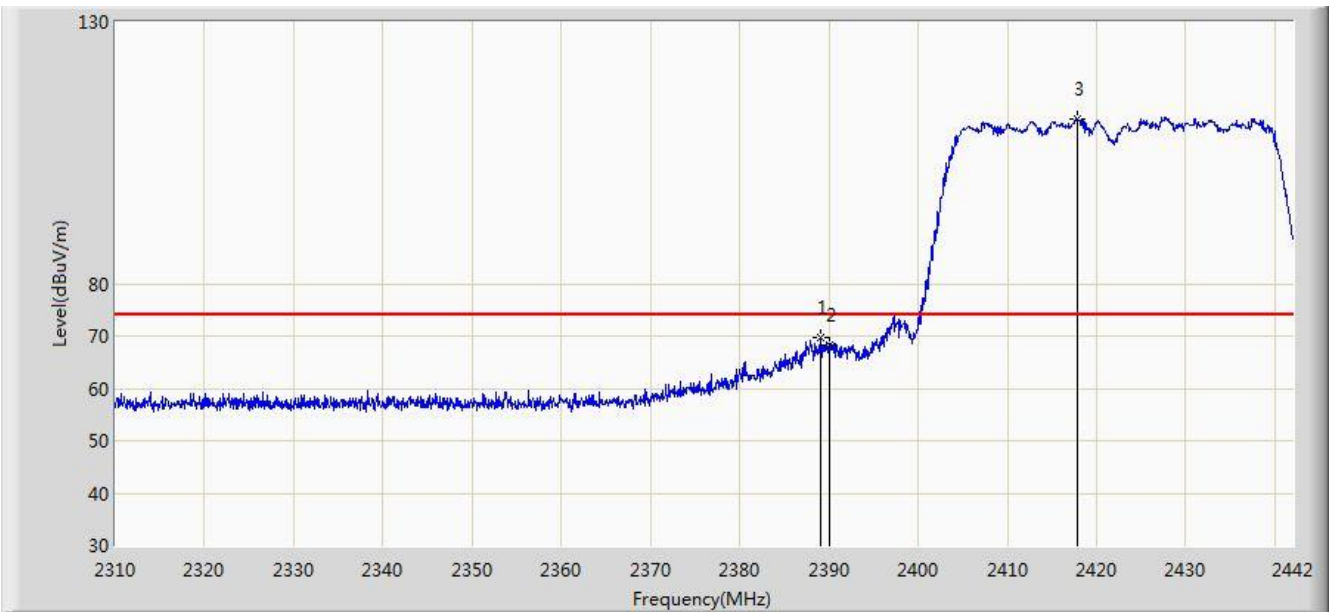


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.134	69.782	37.206	-4.218	74.000	32.576	PK
2			2390.000	68.156	35.581	-5.844	74.000	32.575	PK
3			2417.844	111.527	78.987	N/A	N/A	32.540	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/09 - 23:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz (CDD Mode)	

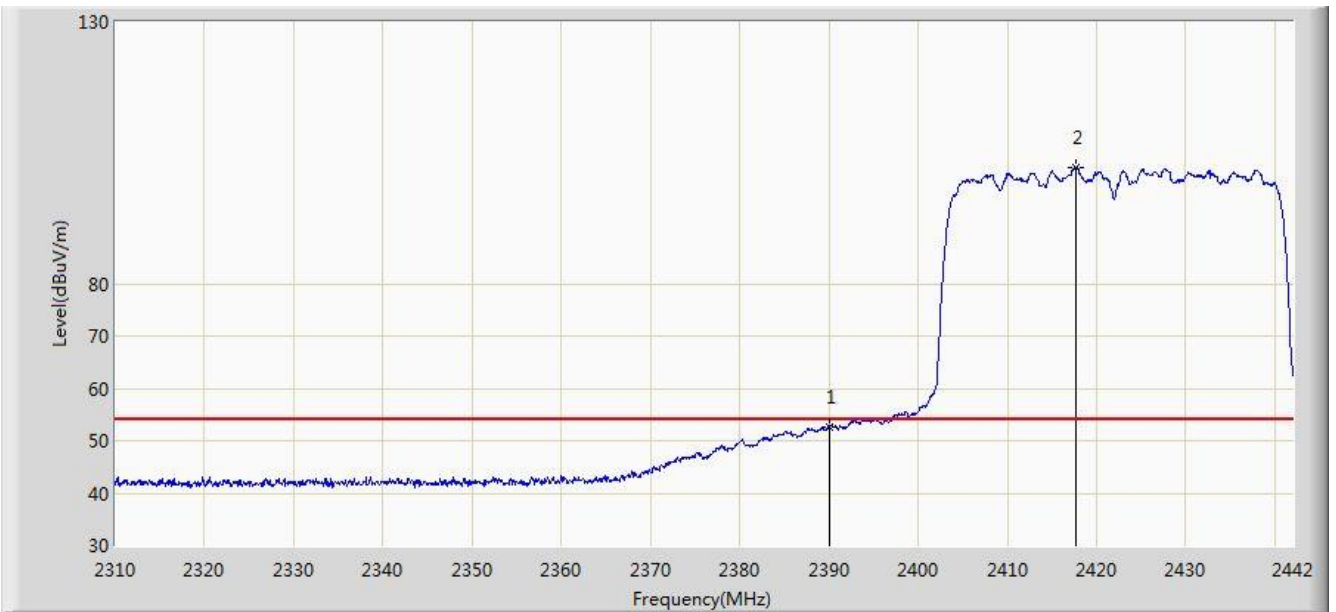


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.587	20.012	-1.413	54.000	32.575	AV
2			2417.646	102.269	69.729	N/A	N/A	32.541	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/10/15 - 21:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2427MHz (CDD Mode) (Worst Polarization)	

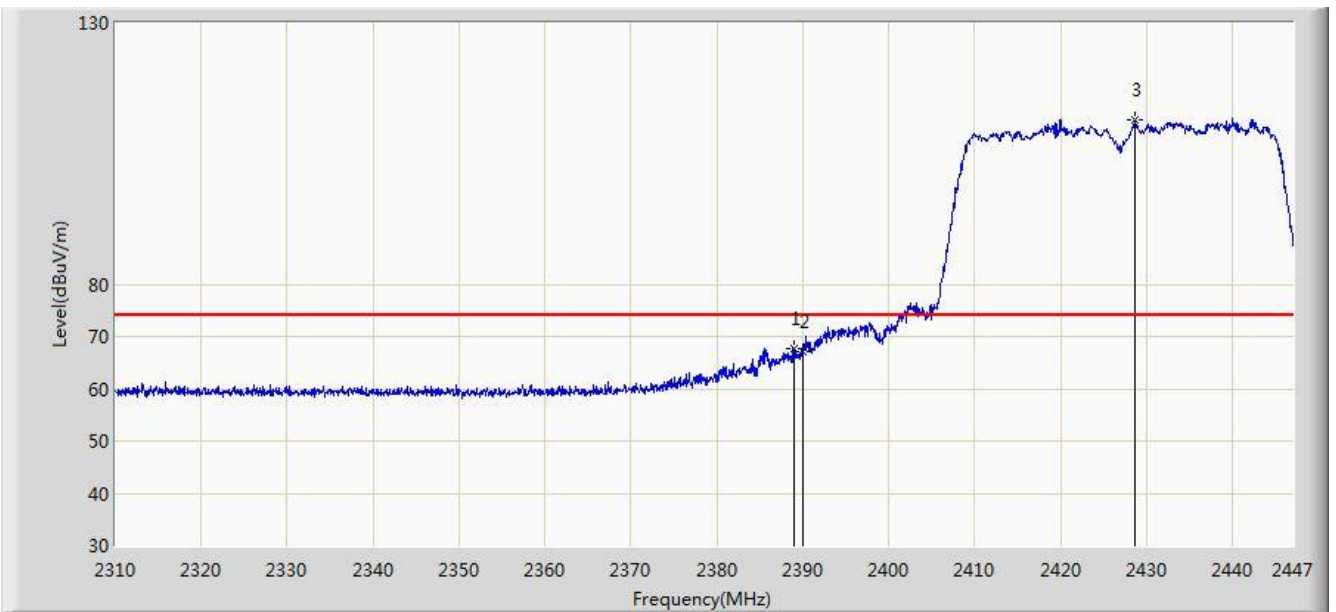


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.912	67.737	35.161	-6.263	74.000	32.577	PK
2			2390.000	67.030	34.455	-6.970	74.000	32.575	PK
3		*	2428.573	111.344	78.819	N/A	N/A	32.526	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2018/10/15 - 21:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2427MHz (CDD Mode) (Worst Polarization)	

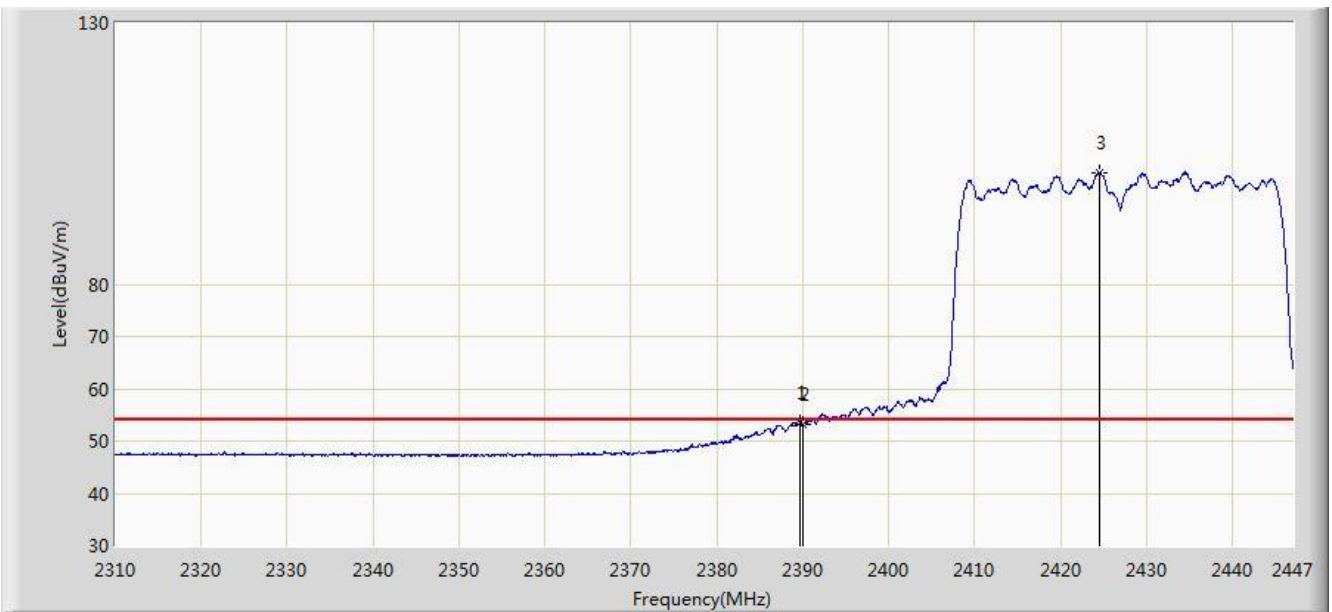


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.597	53.441	20.866	-0.559	54.000	32.575	AV
2			2390.000	53.095	20.520	-0.905	54.000	32.575	AV
3		*	2424.532	101.436	68.905	N/A	N/A	32.531	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2018/08/10 - 00:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz (CDD Mode)	

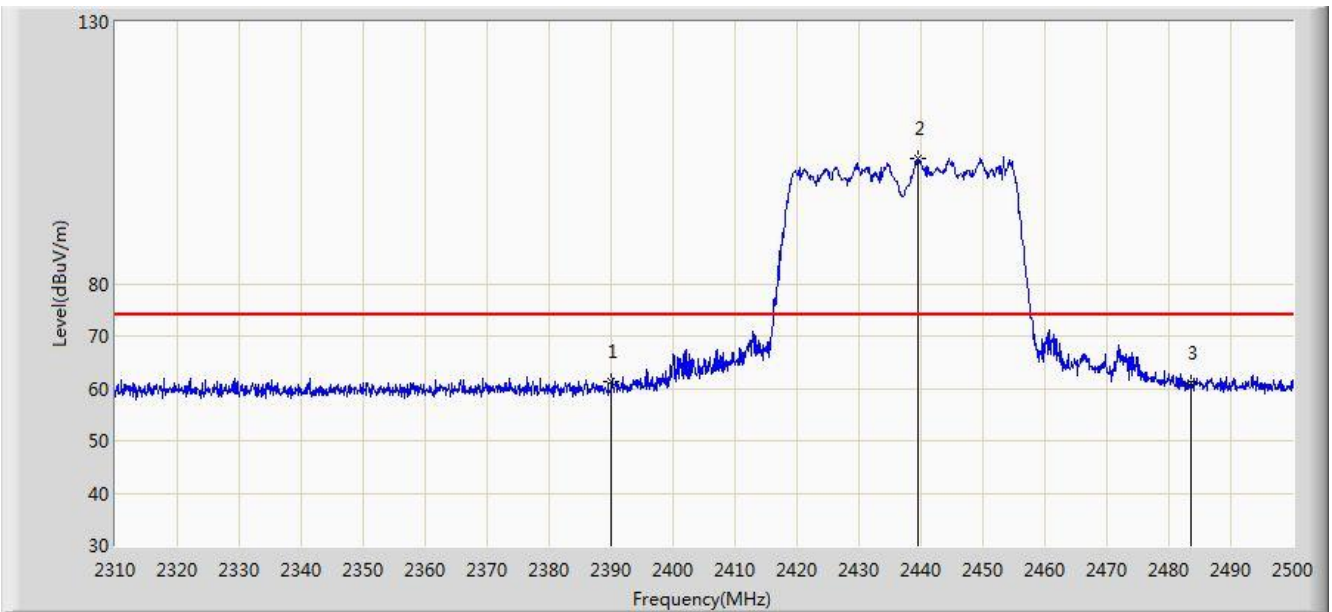


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	61.181	28.606	-12.819	74.000	32.575	PK
2			2439.580	103.933	71.421	N/A	N/A	32.512	PK
3			2483.500	61.087	28.491	-12.913	74.000	32.596	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/10 - 00:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz (CDD Mode)	

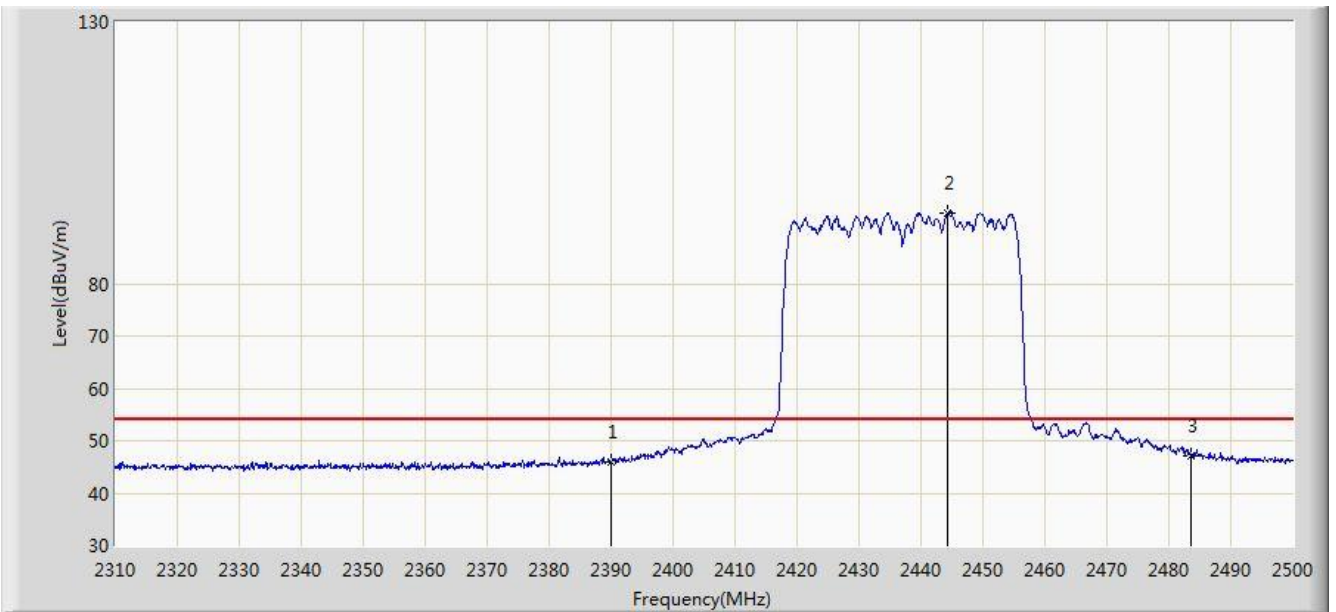


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	45.817	13.242	-8.183	54.000	32.575	AV
2			2444.330	93.596	61.090	N/A	N/A	32.506	AV
3			2483.500	47.217	14.621	-6.783	54.000	32.596	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/10 - 00:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz (CDD Mode)	

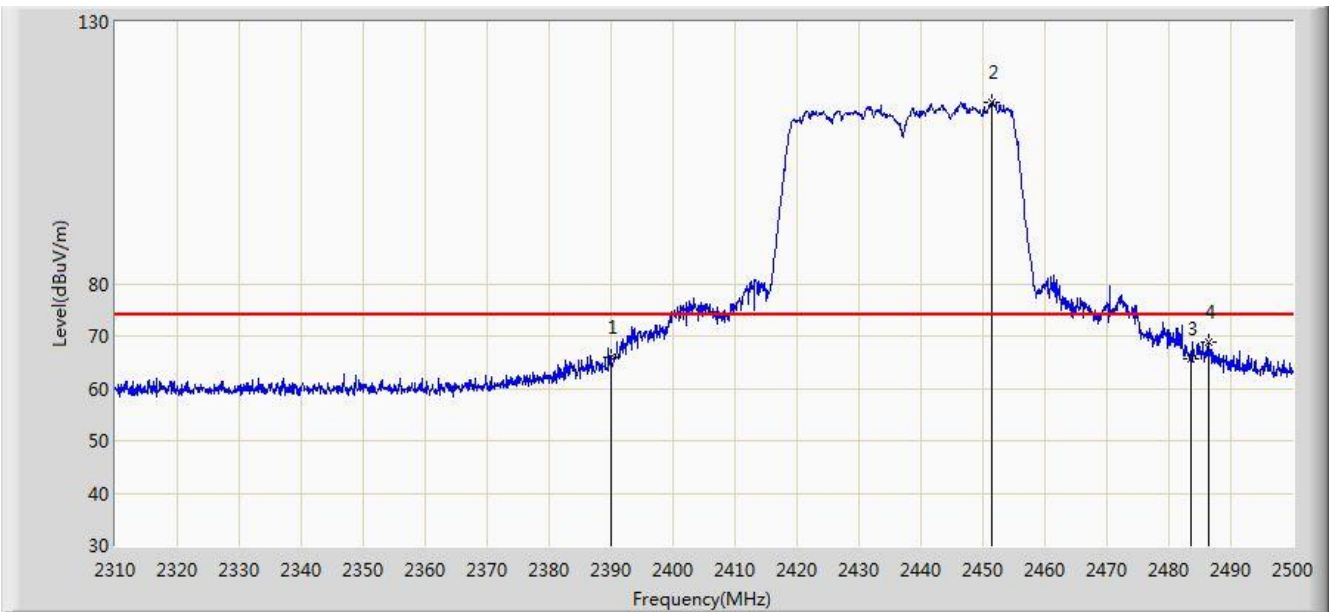


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	65.998	33.423	-8.002	74.000	32.575	PK
2			2451.455	114.656	82.139	N/A	N/A	32.517	PK
3			2483.500	65.723	33.127	-8.277	74.000	32.596	PK
4			2486.415	68.930	36.327	-5.070	74.000	32.603	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/10 - 00:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz (CDD Mode)	

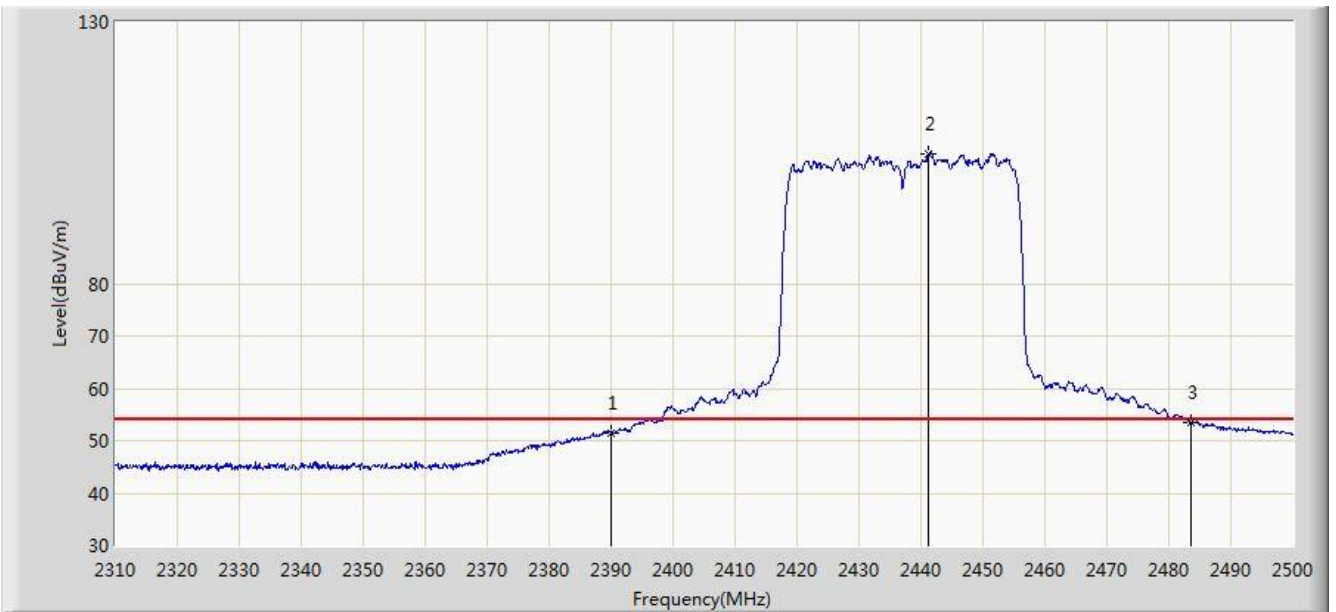

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	51.591	19.016	-2.409	54.000	32.575	AV
2			2441.195	104.712	72.202	N/A	N/A	32.510	AV
3			2483.500	53.404	20.808	-0.596	54.000	32.596	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/10/15 - 21:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2447MHz (CDD Mode) (Worst Polarization)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2458.098	111.216	78.684	N/A	N/A	32.532	PK
2			2483.500	67.205	34.609	-6.795	74.000	32.596	PK
3			2484.561	68.676	36.078	-5.324	74.000	32.599	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2018/10/15 - 21:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2447MHz (CDD Mode) (Worst Polarization)	

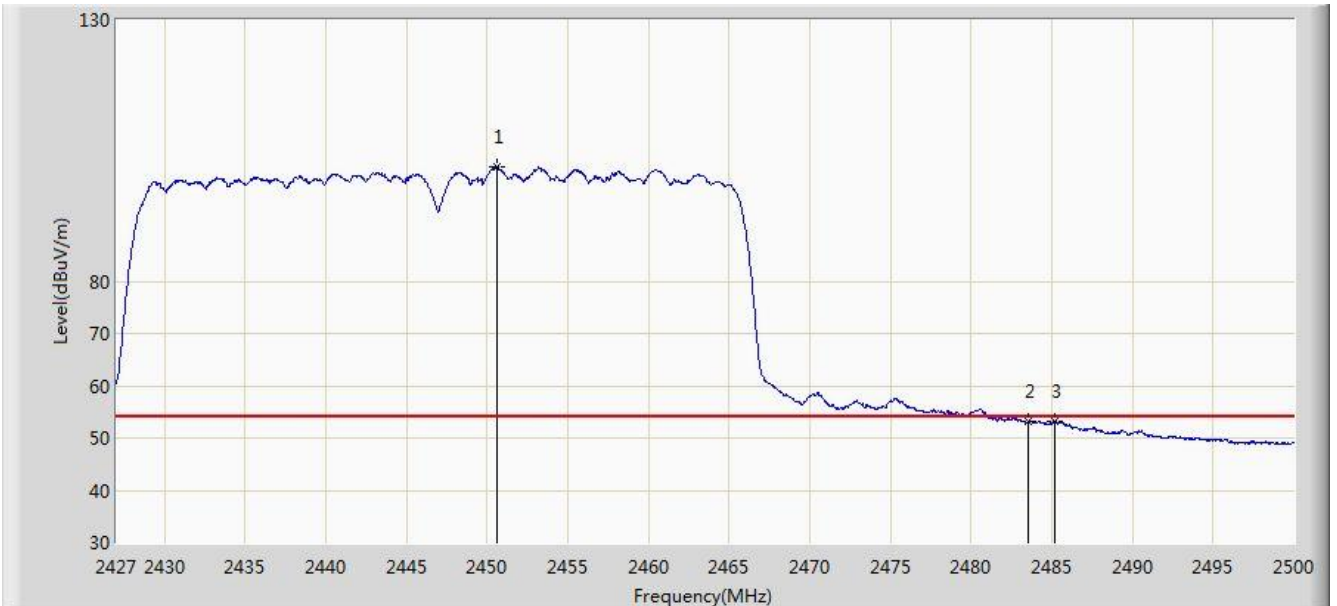


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2450.615	101.901	69.386	N/A	N/A	32.515	AV
2			2483.500	53.072	20.476	-0.928	54.000	32.596	AV
3			2485.145	53.150	20.550	-0.850	54.000	32.600	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2018/08/10 - 00:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz (CDD Mode)	

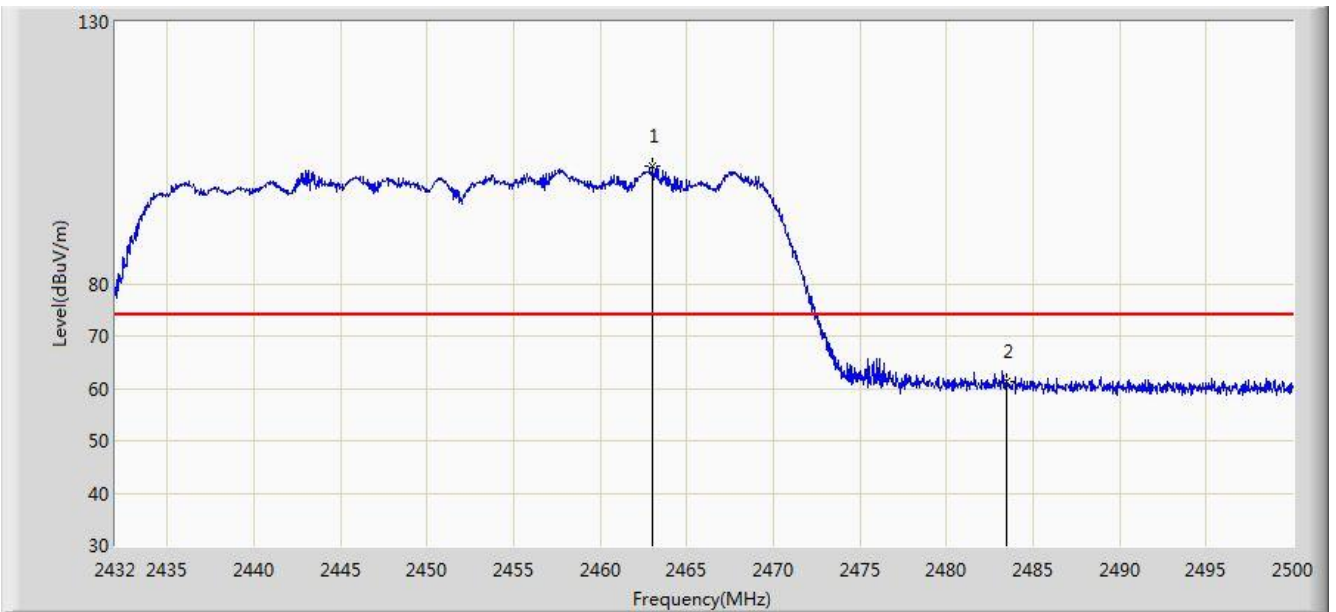


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2463.042	102.338	69.796	N/A	N/A	32.542	PK
2			2483.500	61.374	28.778	-12.626	74.000	32.596	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/10 - 00:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz (CDD Mode)	

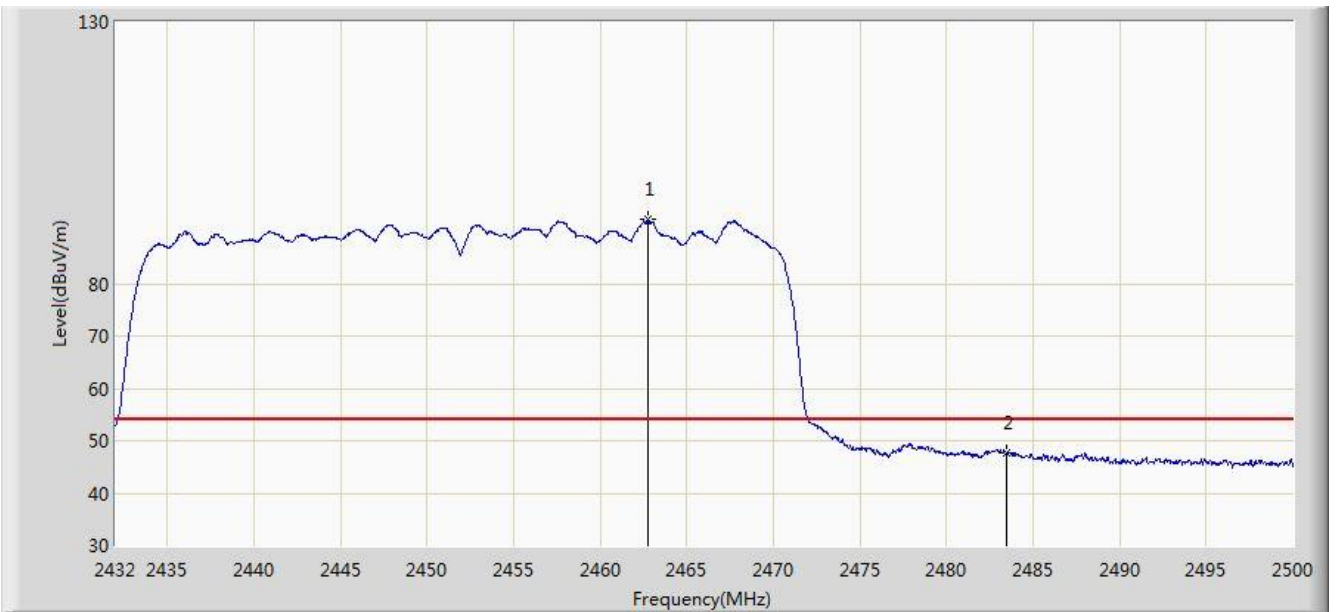


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2462.804	92.335	59.793	N/A	N/A	32.542	AV
2			2483.500	47.749	15.153	-6.251	54.000	32.596	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/10 - 00:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz (CDD Mode)	

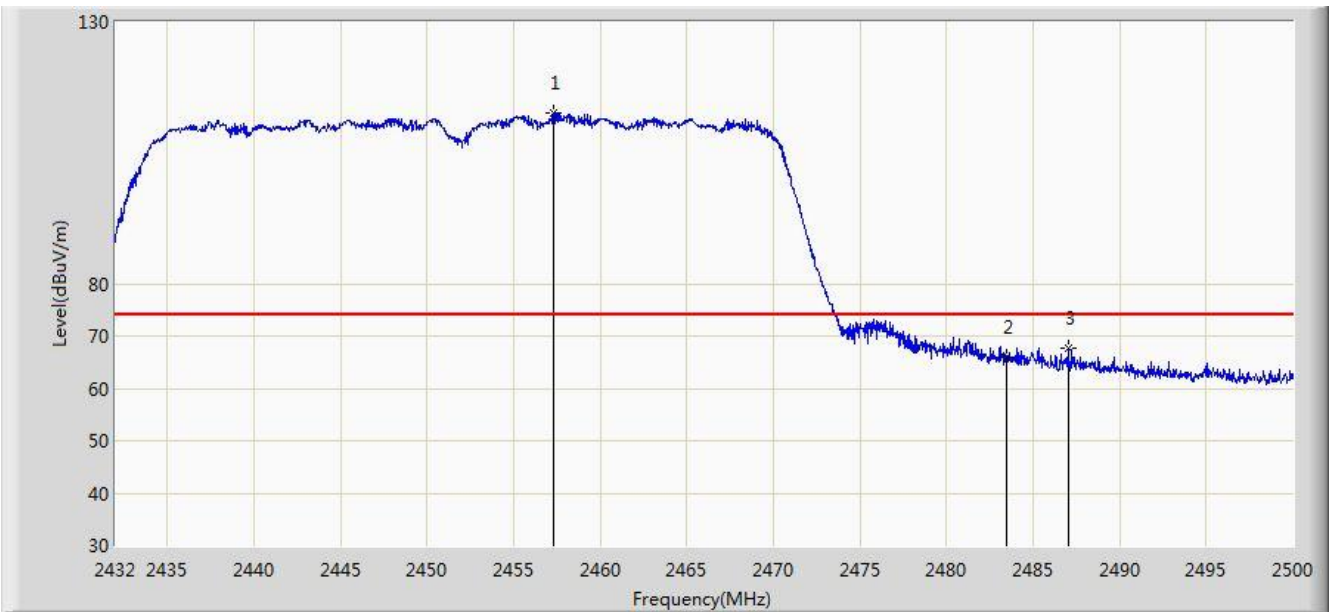


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2457.330	112.480	79.950	N/A	N/A	32.530	PK
2			2483.500	66.069	33.473	-7.931	74.000	32.596	PK
3			2487.012	67.666	35.061	-6.334	74.000	32.605	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/10 - 00:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz (CDD Mode)	

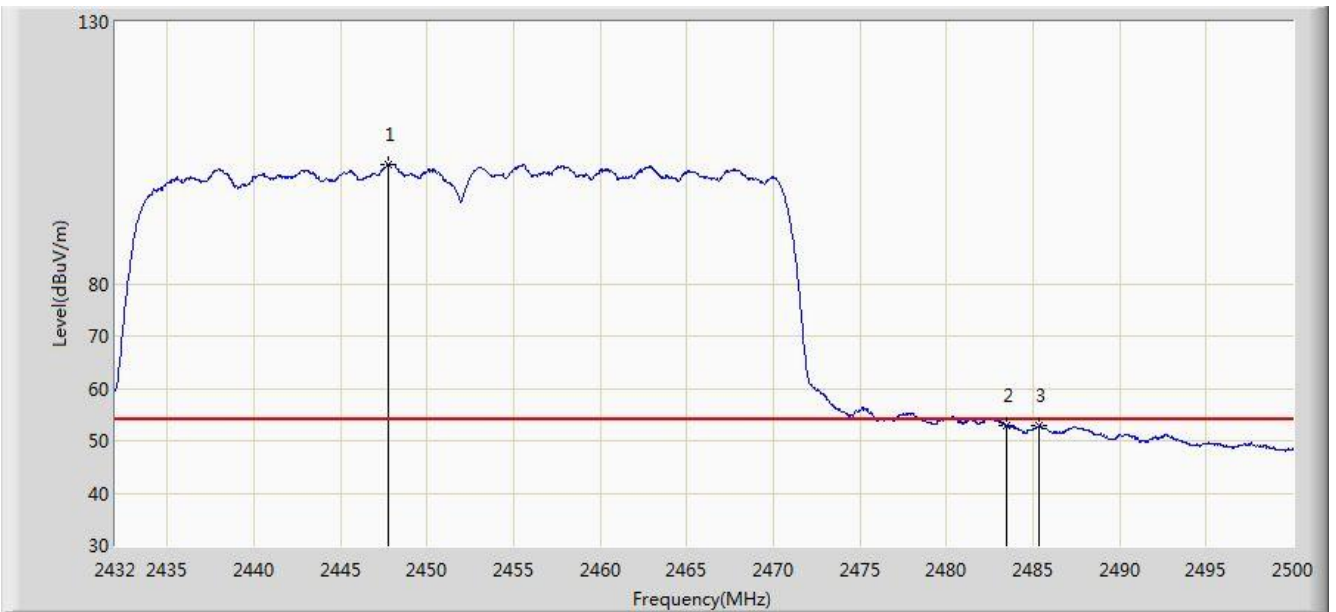


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2447.776	102.855	70.347	N/A	N/A	32.509	AV
2			2483.500	52.860	20.264	-1.140	54.000	32.596	AV
3			2485.380	52.913	20.312	-1.087	54.000	32.601	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/11 - 13:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 2412MHz (CDD Mode)	

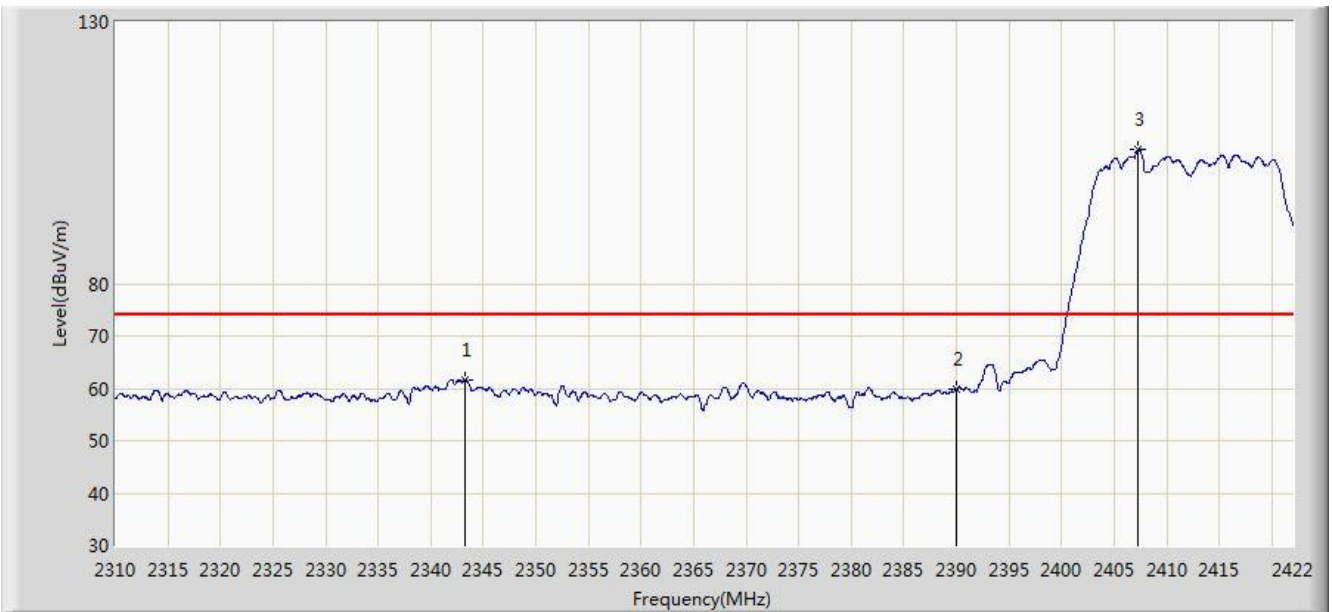


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2343.208	61.528	28.857	-12.472	74.000	32.671	PK
2			2390.000	59.769	27.194	-14.231	74.000	32.575	PK
3			2407.328	105.623	73.070	N/A	N/A	32.553	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/11 - 13:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 2412MHz (CDD Mode)	

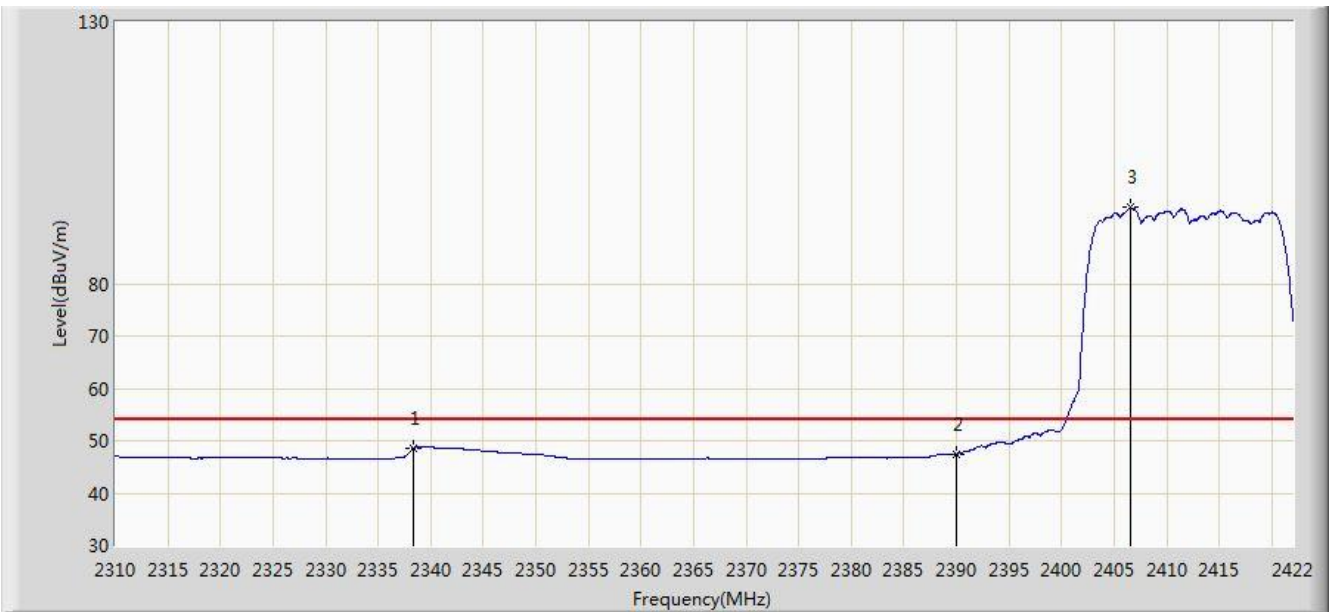

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2338.336	48.490	15.799	-5.510	54.000	32.690	AV
2			2390.000	47.416	14.841	-6.584	54.000	32.575	AV
3			2406.600	94.494	61.940	N/A	N/A	32.554	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/11 - 13:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 2412MHz (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	68.397	35.822	-5.603	74.000	32.575	PK
2			2407.328	115.906	83.353	N/A	N/A	32.553	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/11 - 13:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 2412MHz (CDD Mode)	

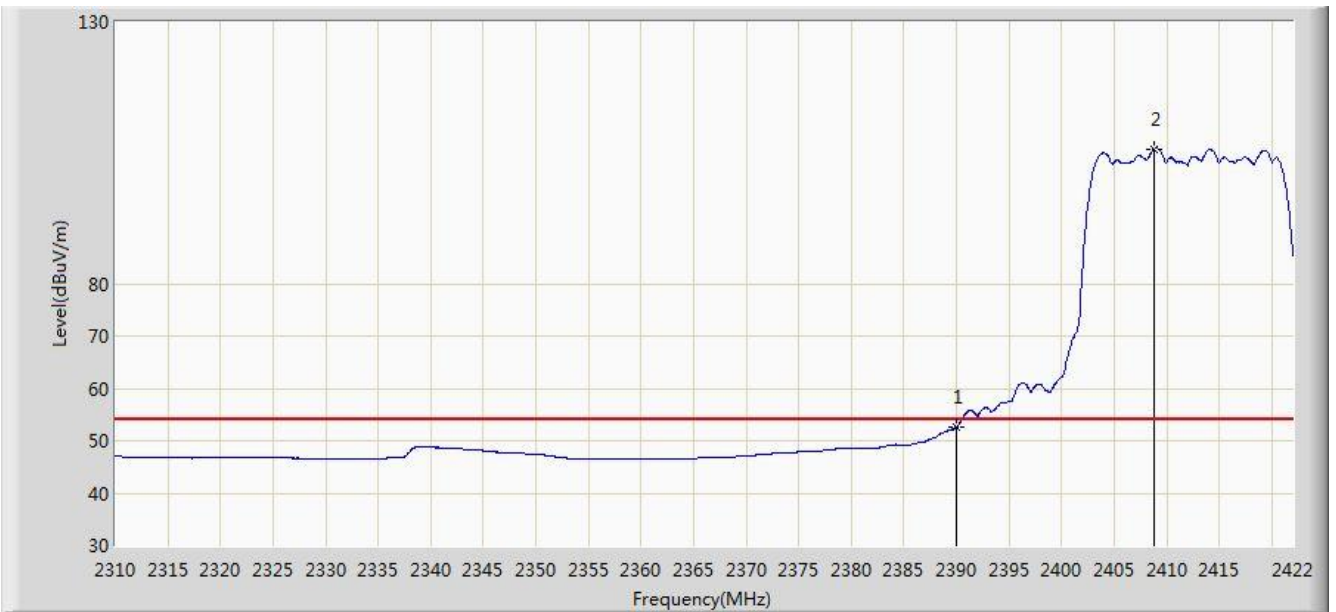


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.593	20.018	-1.407	54.000	32.575	AV
2			2408.784	105.675	73.123	N/A	N/A	32.552	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/11 - 13:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 2417MHz (CDD Mode) (Worst Polarization)	

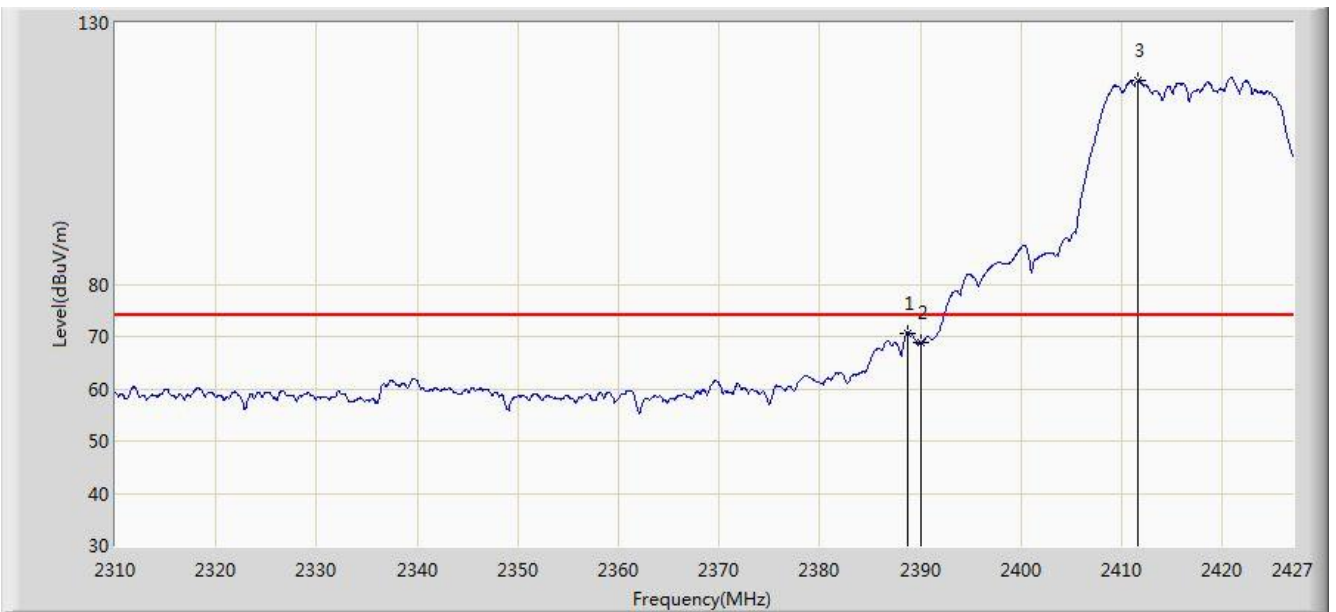


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.683	70.666	38.089	-3.334	74.000	32.577	PK
2			2390.000	68.935	36.360	-5.065	74.000	32.575	PK
3			2411.673	119.010	86.462	N/A	N/A	32.549	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2018/08/11 - 13:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 2417MHz (CDD Mode) (Worst Polarization)	

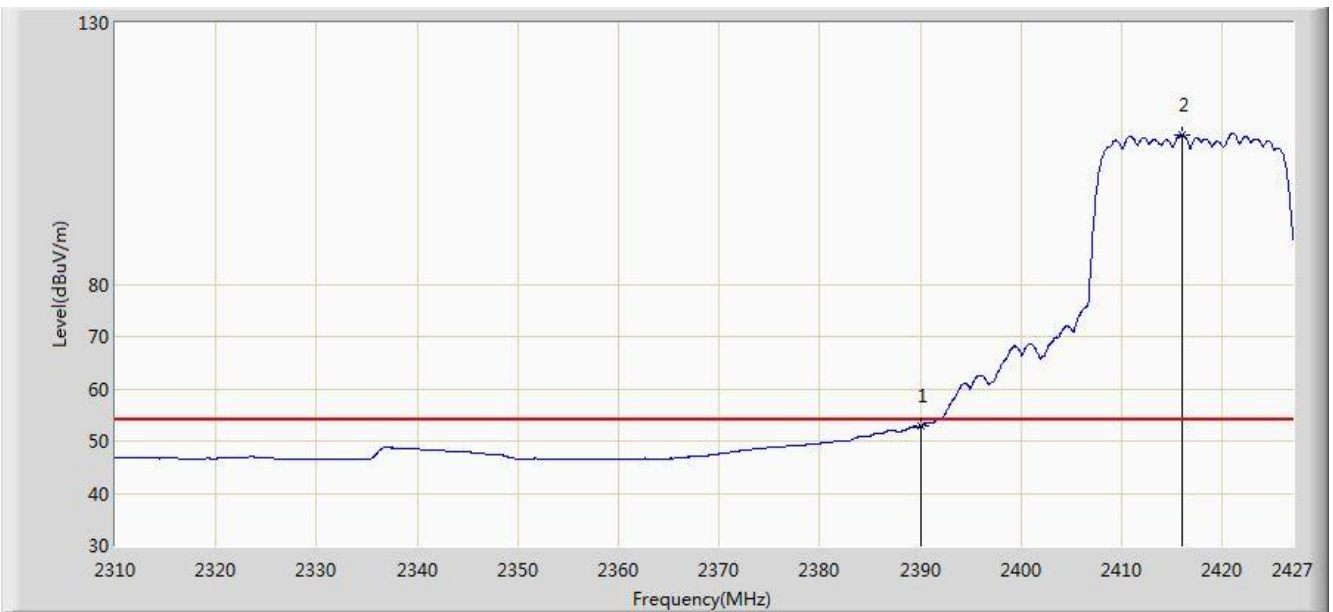


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.904	20.329	-1.096	54.000	32.575	AV
2			2416.002	108.680	76.138	N/A	N/A	32.542	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2018/08/11 - 14:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 2437MHz (CDD Mode)	

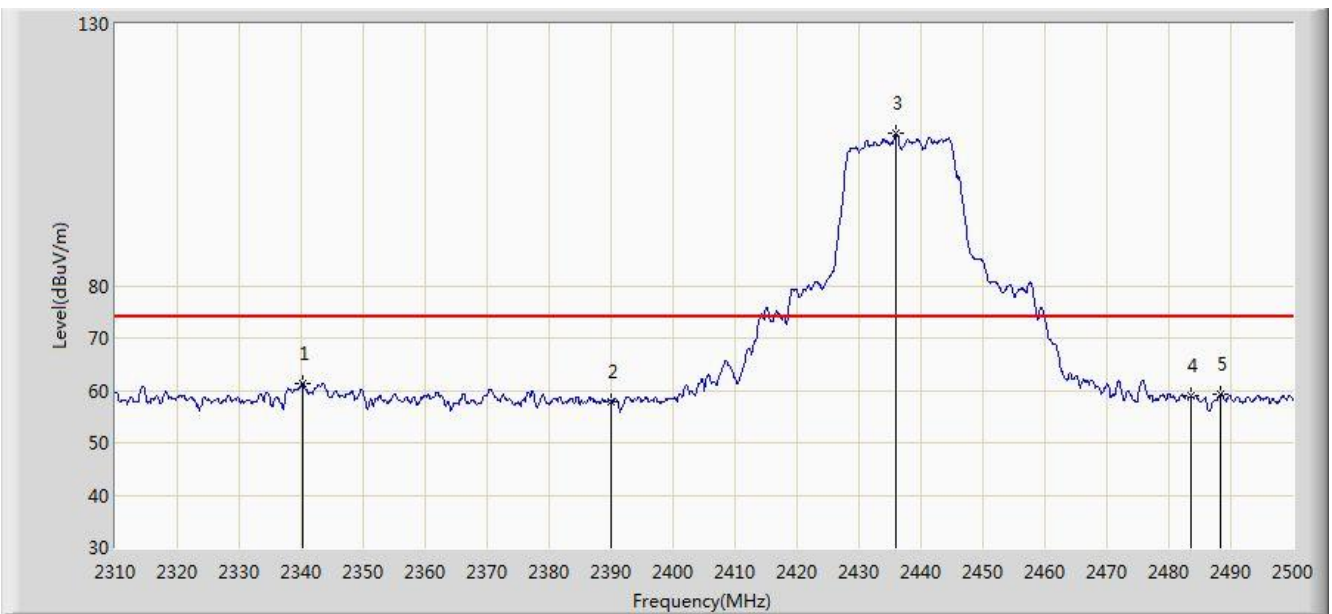


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2340.305	61.422	28.740	-12.578	74.000	32.681	PK
2			2390.000	57.738	25.163	-16.262	74.000	32.575	PK
3			2436.065	109.015	76.499	N/A	N/A	32.516	PK
4			2483.500	58.895	26.299	-15.105	74.000	32.596	PK
5			2488.220	59.145	26.537	-14.855	74.000	32.608	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/11 - 14:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 2437MHz (CDD Mode)	

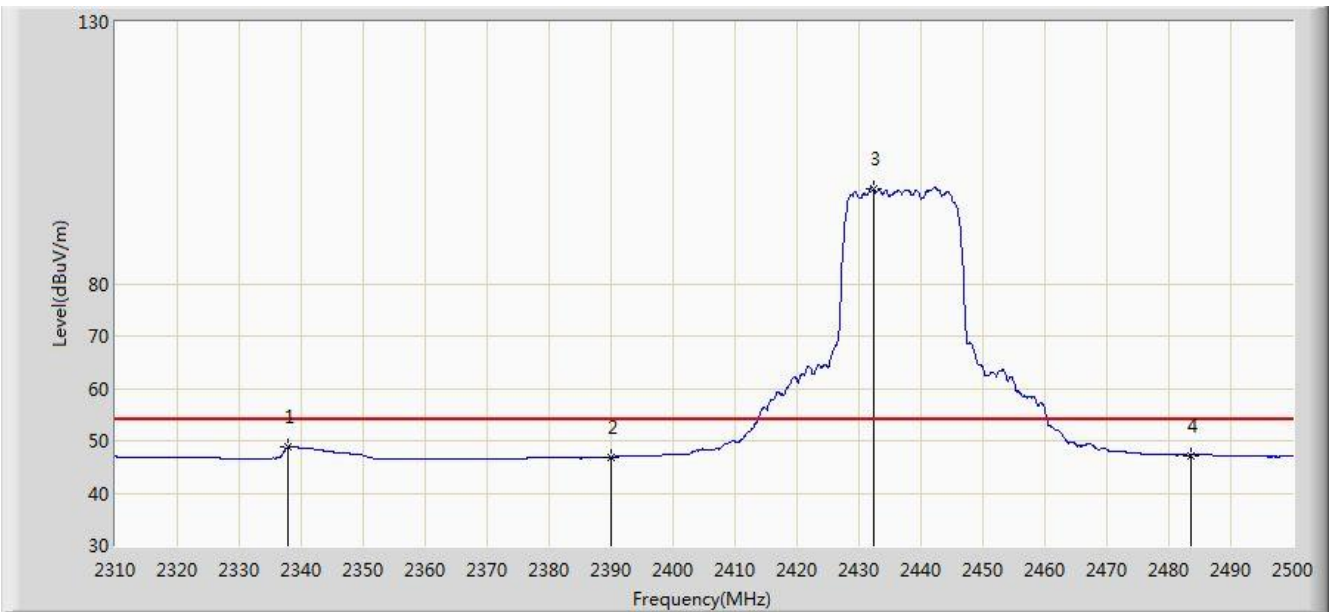

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2337.835	48.793	16.100	-5.207	54.000	32.693	AV
2			2390.000	46.911	14.336	-7.089	54.000	32.575	AV
3			2432.265	98.196	65.675	N/A	N/A	32.521	AV
4			2483.500	47.230	14.634	-6.770	54.000	32.596	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/11 - 14:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 2437MHz (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	62.306	29.731	-11.694	74.000	32.575	PK
2			2444.615	120.424	87.918	N/A	N/A	32.507	PK
3			2483.500	68.469	35.873	-5.531	74.000	32.596	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/11 - 14:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 2437MHz (CDD Mode)	

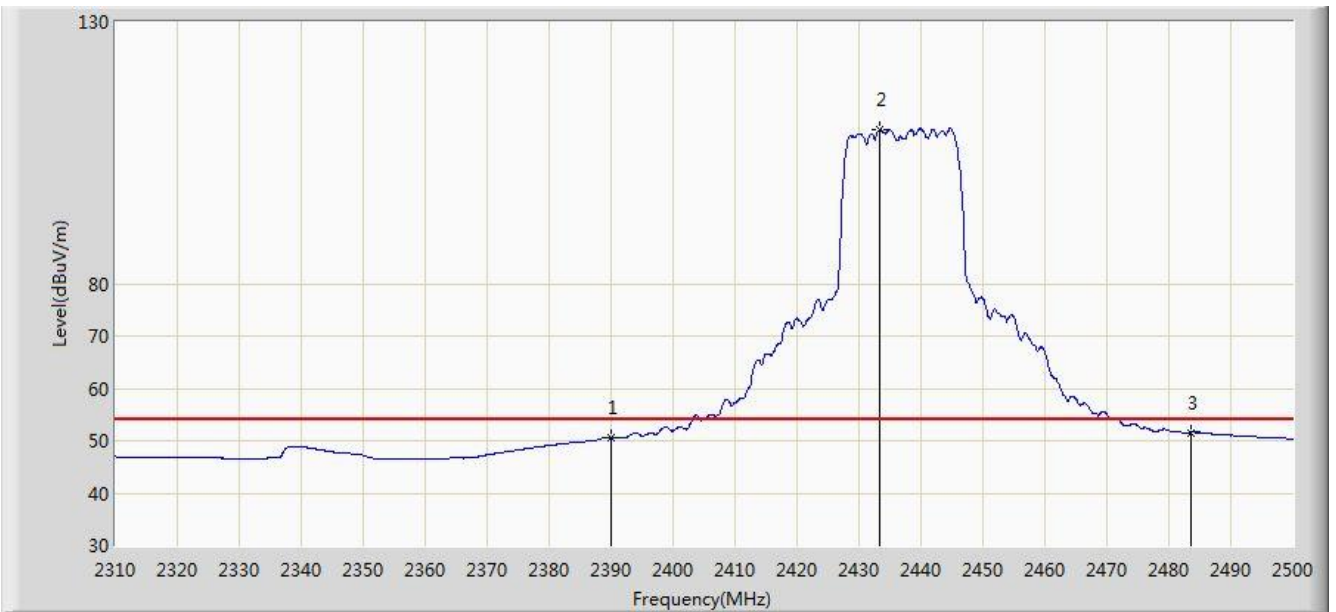


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	50.533	17.958	-3.467	54.000	32.575	AV
2			2433.310	109.354	76.834	N/A	N/A	32.520	AV
3			2483.500	51.574	18.978	-2.426	54.000	32.596	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/11 - 14:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 2457MHz (CDD Mode) (Worst Polarization)	

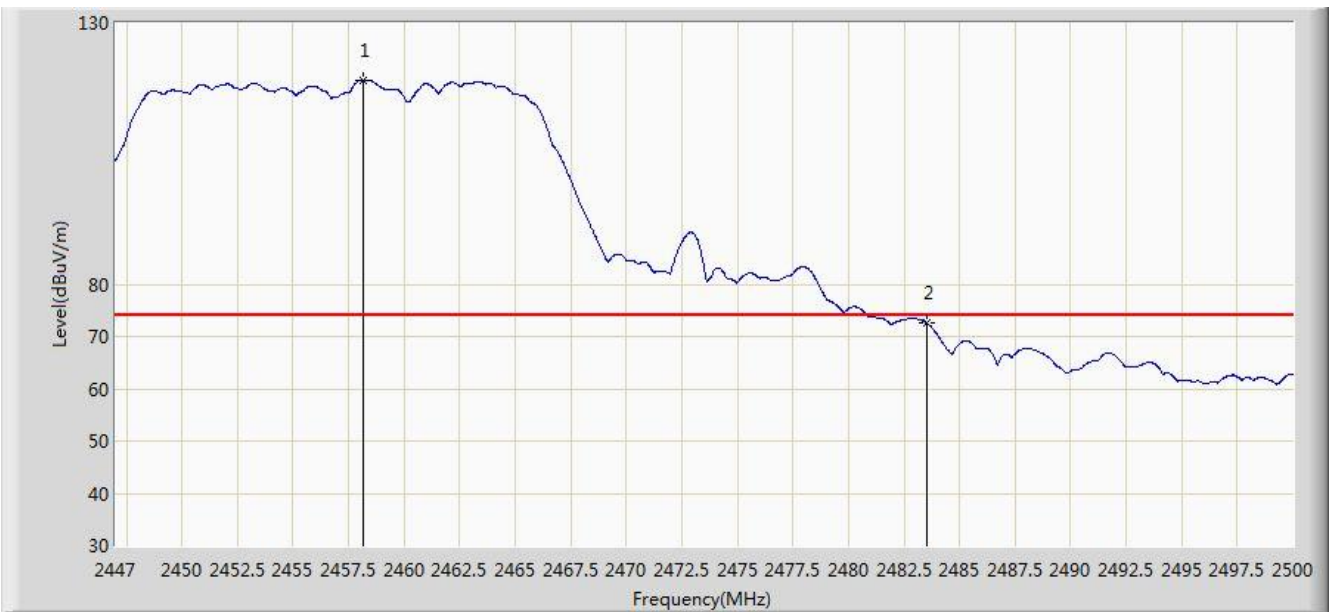


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2458.183	119.087	86.555	N/A	N/A	32.532	PK
2			2483.500	72.663	40.067	-1.337	74.000	32.596	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2018/08/11 - 14:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 2457MHz (CDD Mode) (Worst Polarization)	

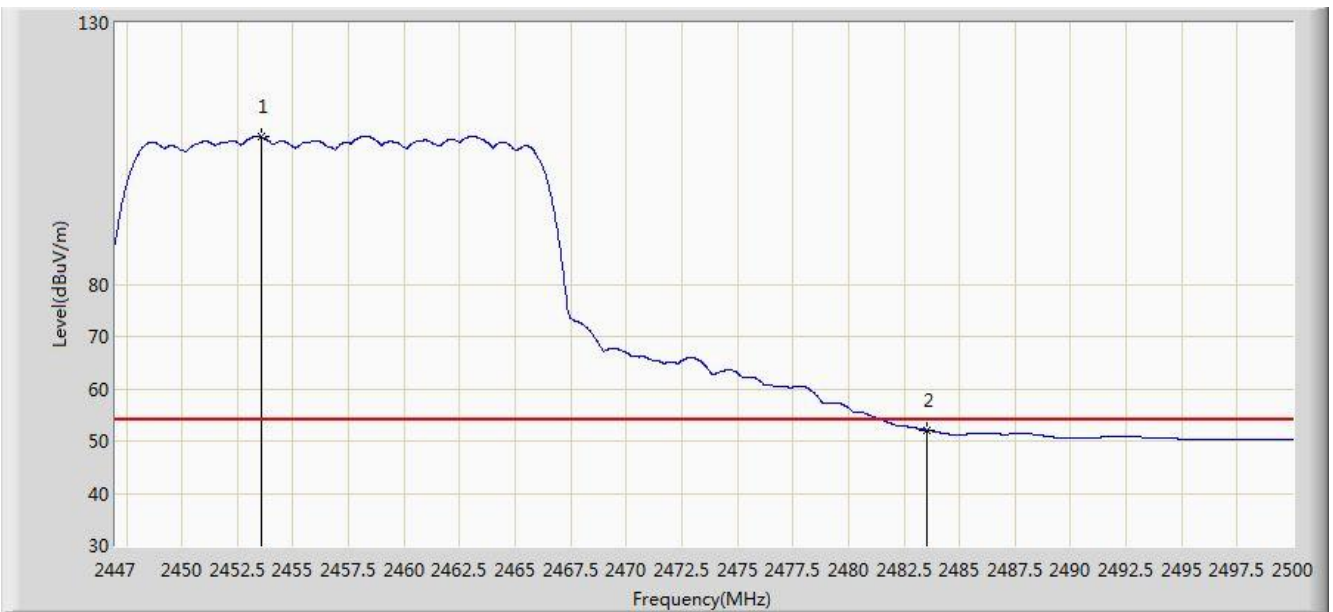


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2453.572	108.194	75.673	N/A	N/A	32.522	AV
2			2483.500	52.112	19.516	-1.888	54.000	32.596	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2018/08/11 - 13:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 2462MHz (CDD Mode)	

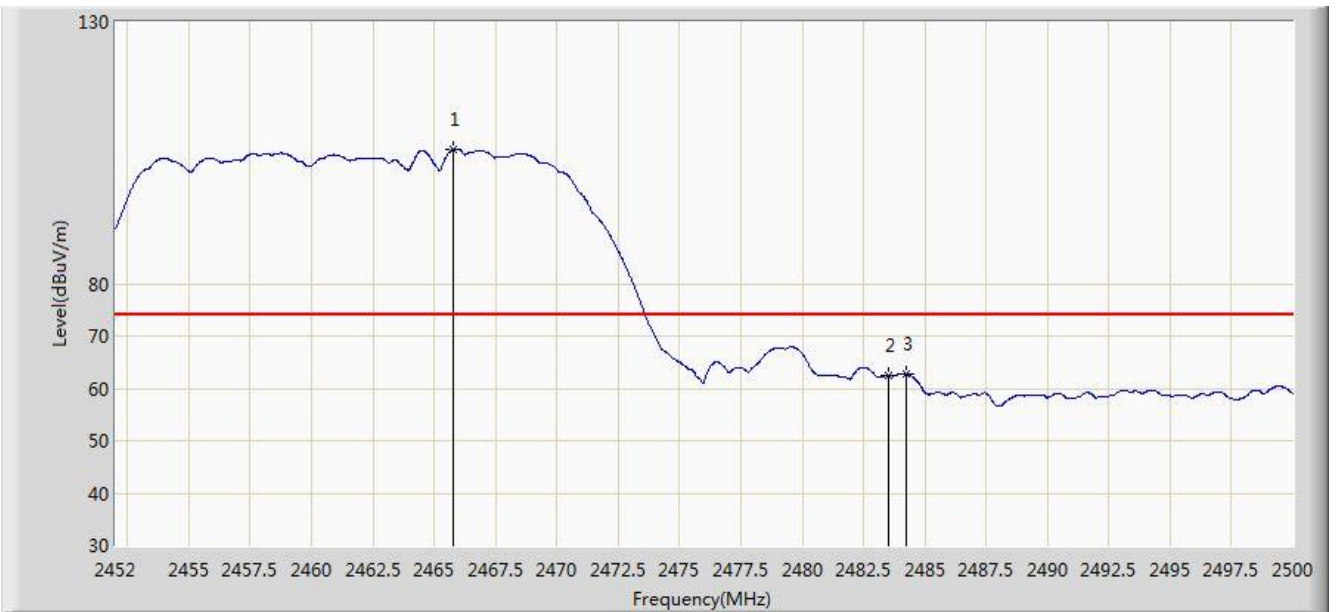


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2465.752	105.626	73.077	N/A	N/A	32.549	PK
2			2483.500	62.401	29.805	-11.599	74.000	32.596	PK
3			2484.232	62.796	30.198	-11.204	74.000	32.598	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/11 - 13:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 2462MHz (CDD Mode)	

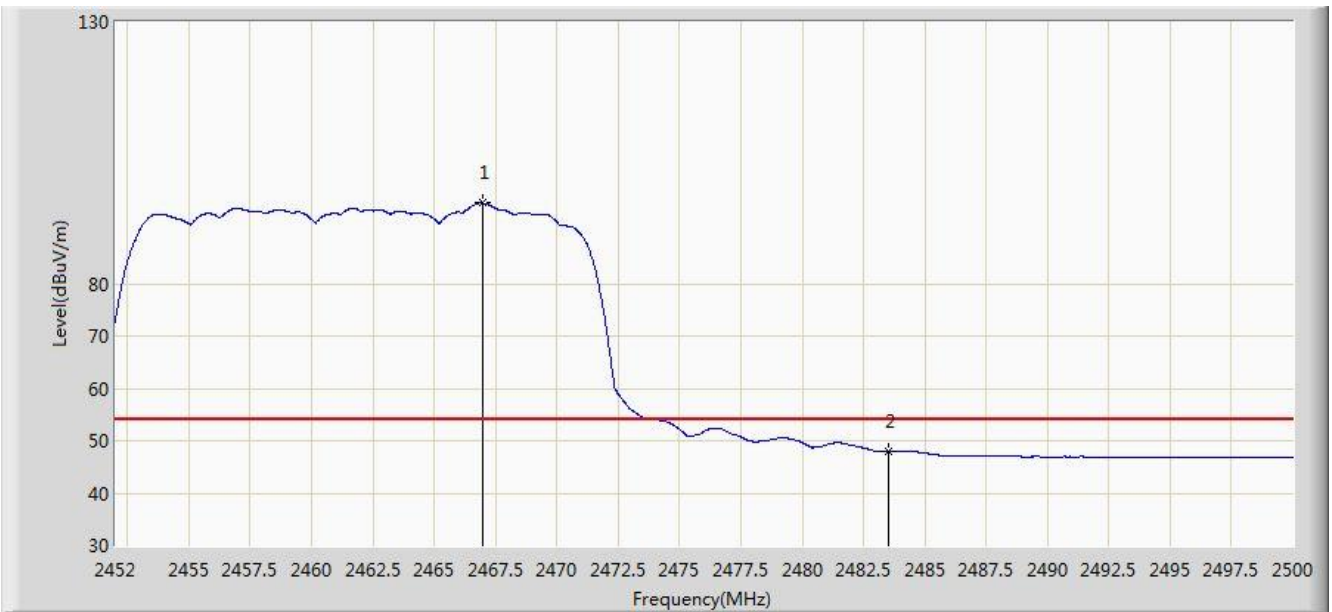

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2466.976	95.401	62.849	N/A	N/A	32.552	AV
2			2483.500	48.086	15.490	-5.914	54.000	32.596	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/11 - 13:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 2462MHz (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2458.168	116.818	84.286	N/A	N/A	32.532	PK
2			2483.500	73.234	40.638	-0.766	74.000	32.596	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/11 - 13:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 2462MHz (CDD Mode)	

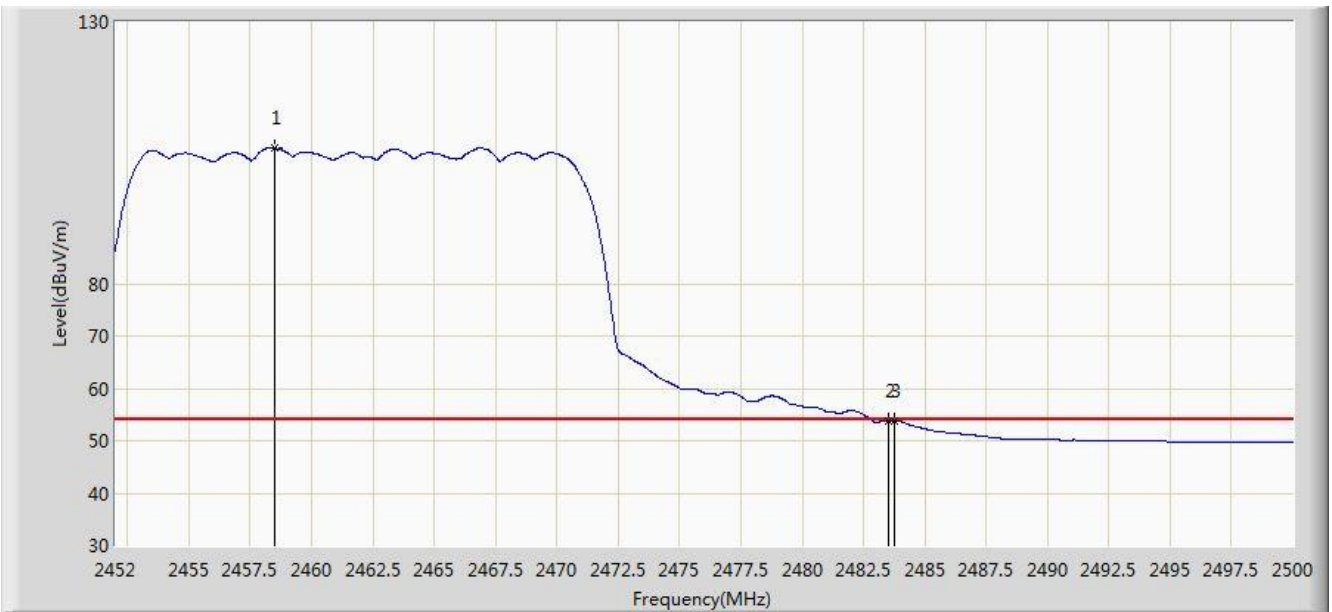


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2458.480	105.961	73.429	N/A	N/A	32.532	AV
2			2483.500	53.734	21.138	-0.266	54.000	32.596	AV
3			2483.776	53.833	21.237	-0.167	54.000	32.596	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/11 - 14:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 2422MHz (CDD Mode)	

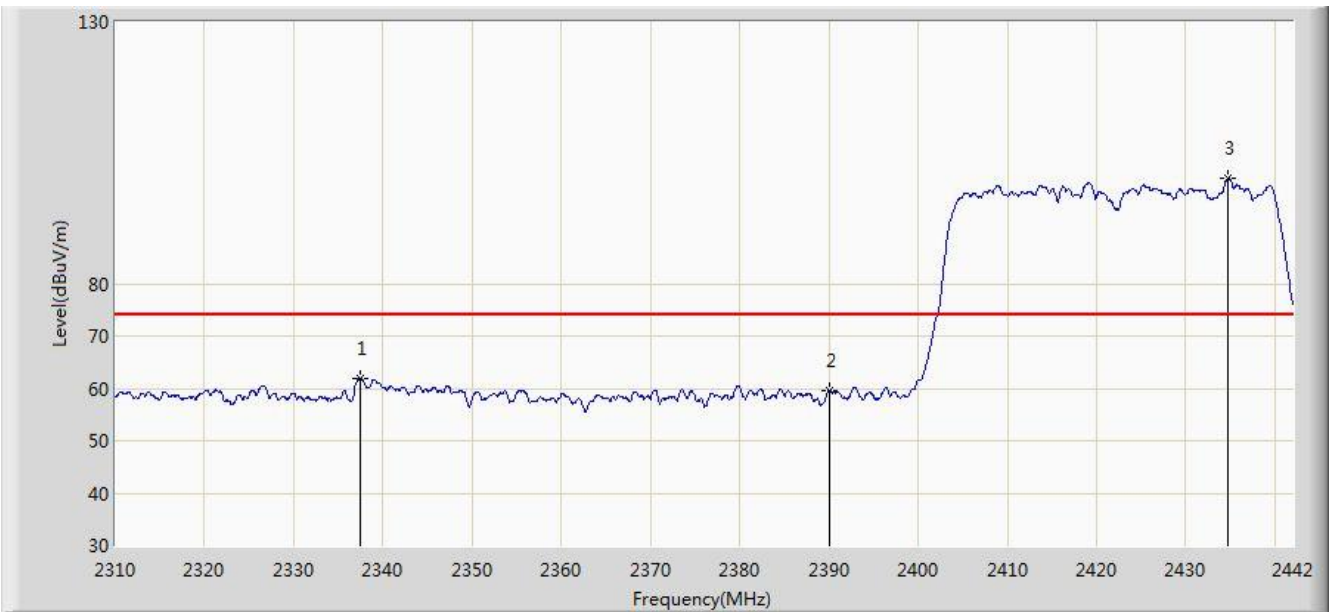


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2337.456	61.987	29.292	-12.013	74.000	32.695	PK
2			2390.000	59.481	26.906	-14.519	74.000	32.575	PK
3			2434.740	100.122	67.604	N/A	N/A	32.518	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/11 - 14:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 2422MHz (CDD Mode)	

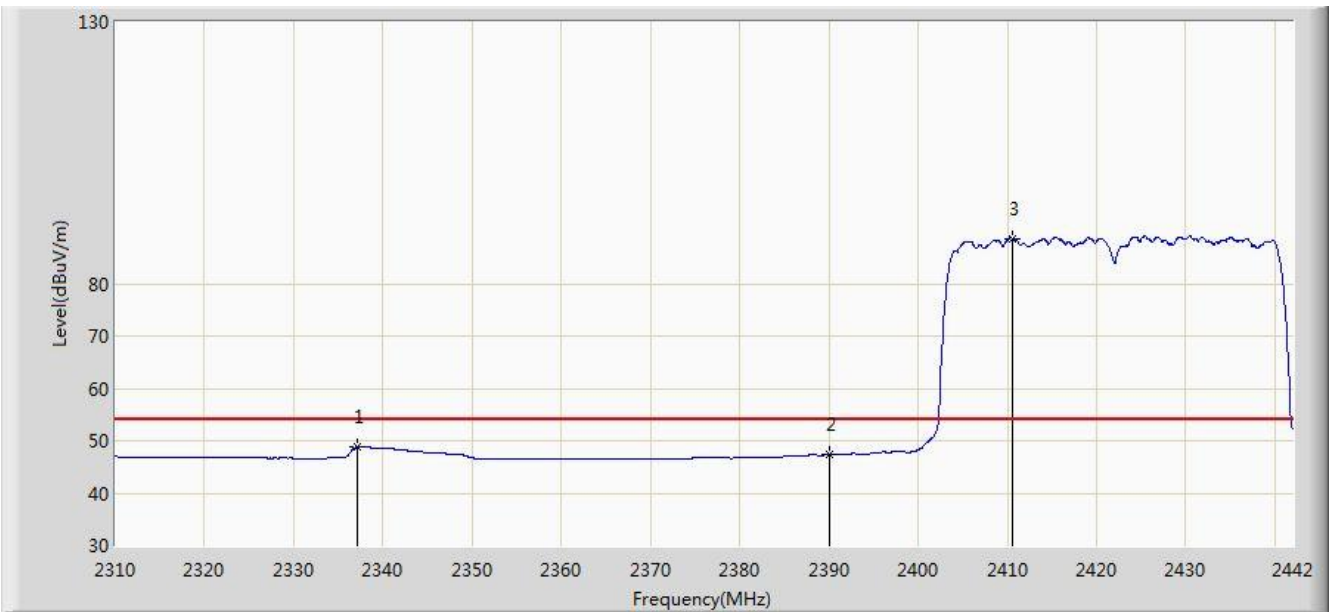


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2337.060	48.813	16.116	-5.187	54.000	32.697	AV
2			2390.000	47.392	14.817	-6.608	54.000	32.575	AV
3			2410.518	88.674	56.124	N/A	N/A	32.549	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/11 - 14:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 2422MHz (CDD Mode)	

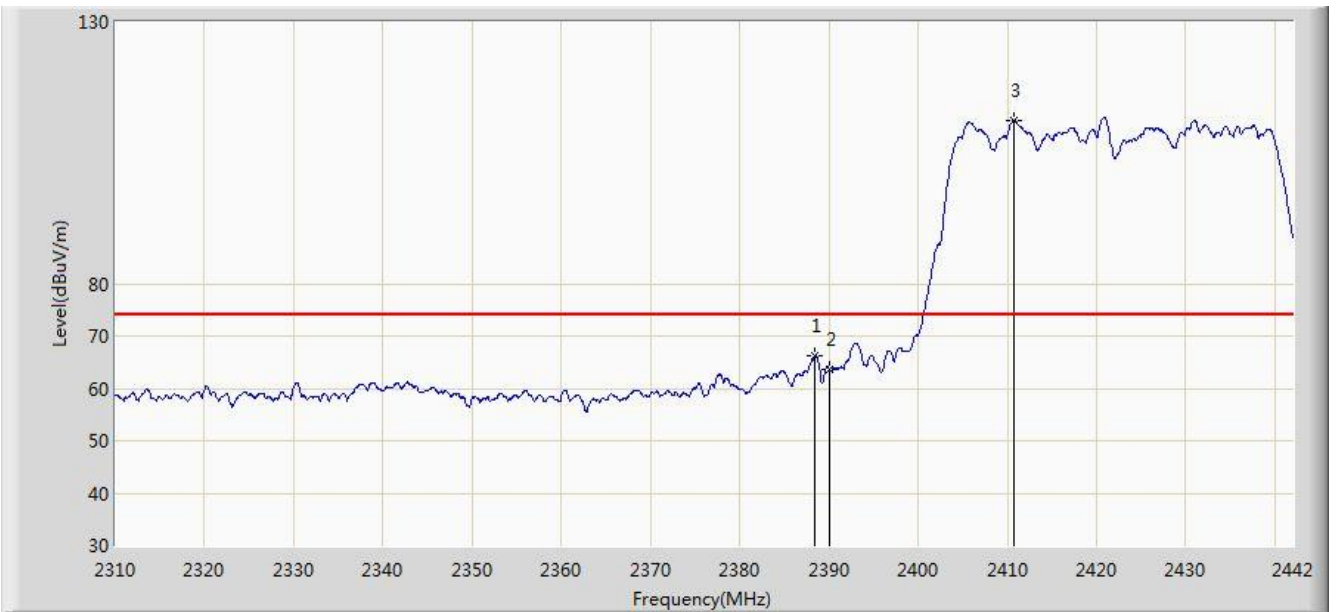


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.474	66.250	33.673	-7.750	74.000	32.577	PK
2			2390.000	63.707	31.132	-10.293	74.000	32.575	PK
3			2410.716	111.280	78.730	N/A	N/A	32.550	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/11 - 14:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 2422MHz (CDD Mode)	

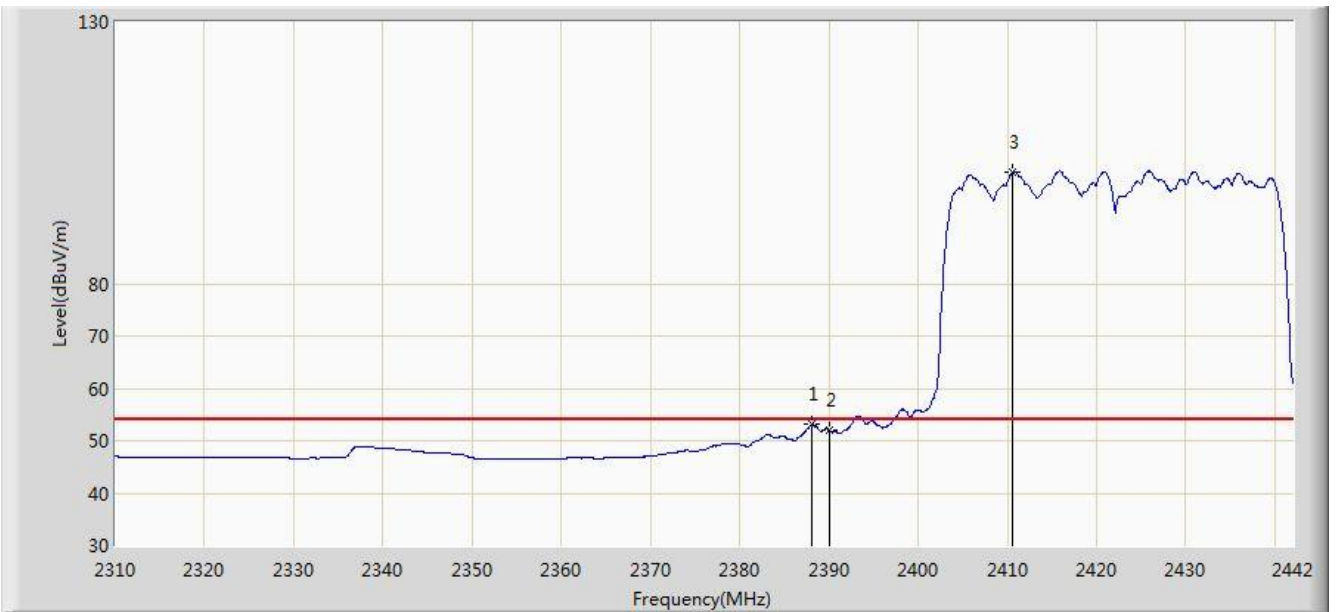


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.144	53.070	20.492	-0.930	54.000	32.578	AV
2			2390.000	52.072	19.497	-1.928	54.000	32.575	AV
3			2410.584	101.293	68.743	N/A	N/A	32.549	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/10/18 - 02:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 2427MHz (CDD Mode) (Worst Polarization)	

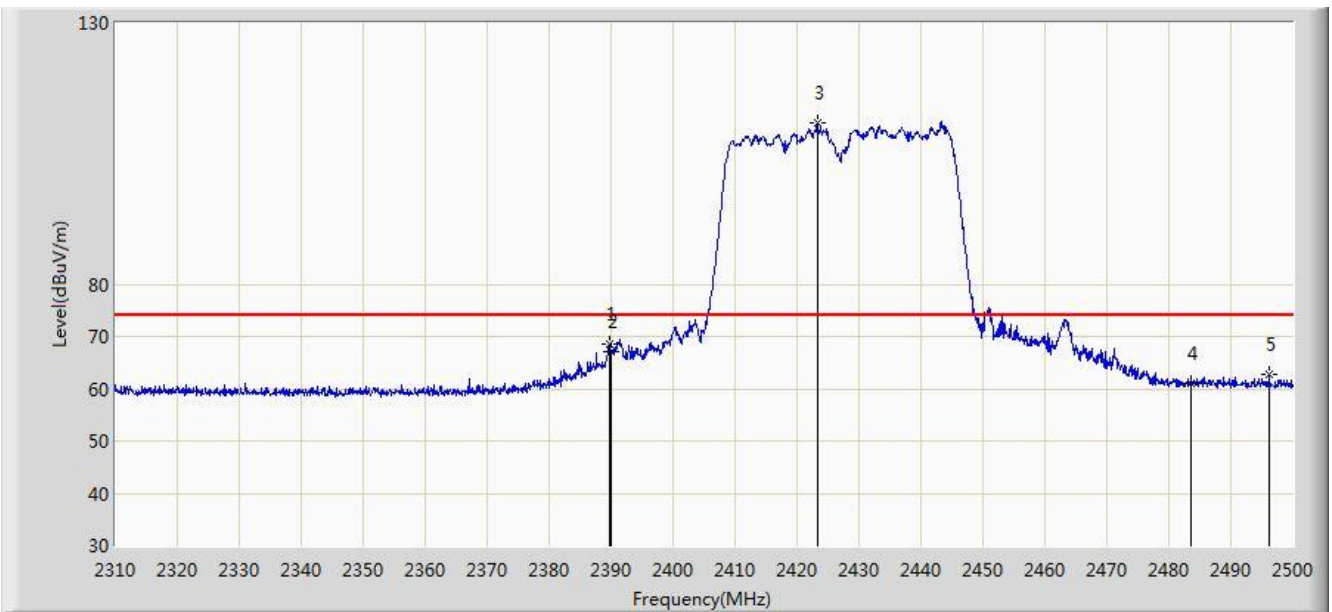


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.800	68.580	36.005	-5.420	74.000	32.575	PK
2			2390.000	67.183	34.608	-6.817	74.000	32.575	PK
3		*	2423.240	110.745	78.213	N/A	N/A	32.532	PK
4			2483.500	60.873	28.277	-13.127	74.000	32.596	PK
5			2496.200	62.841	30.213	-11.159	74.000	32.628	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2018/10/18 - 02:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 2427MHz (CDD Mode) (Worst Polarization)	

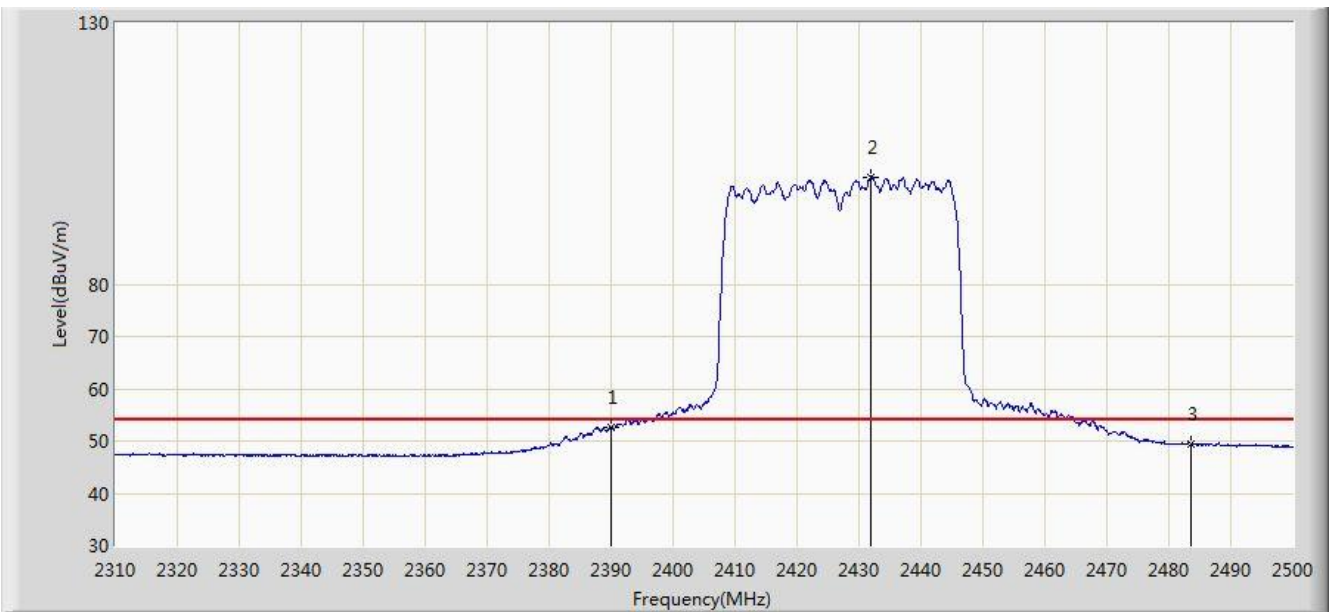


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.667	20.092	-1.333	54.000	32.575	AV
2		*	2431.790	100.415	67.894	N/A	N/A	32.522	AV
3			2483.500	49.451	16.855	-4.549	54.000	32.596	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2018/10/18 - 02:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 2432MHz (CDD Mode) (Worst Polarization)	

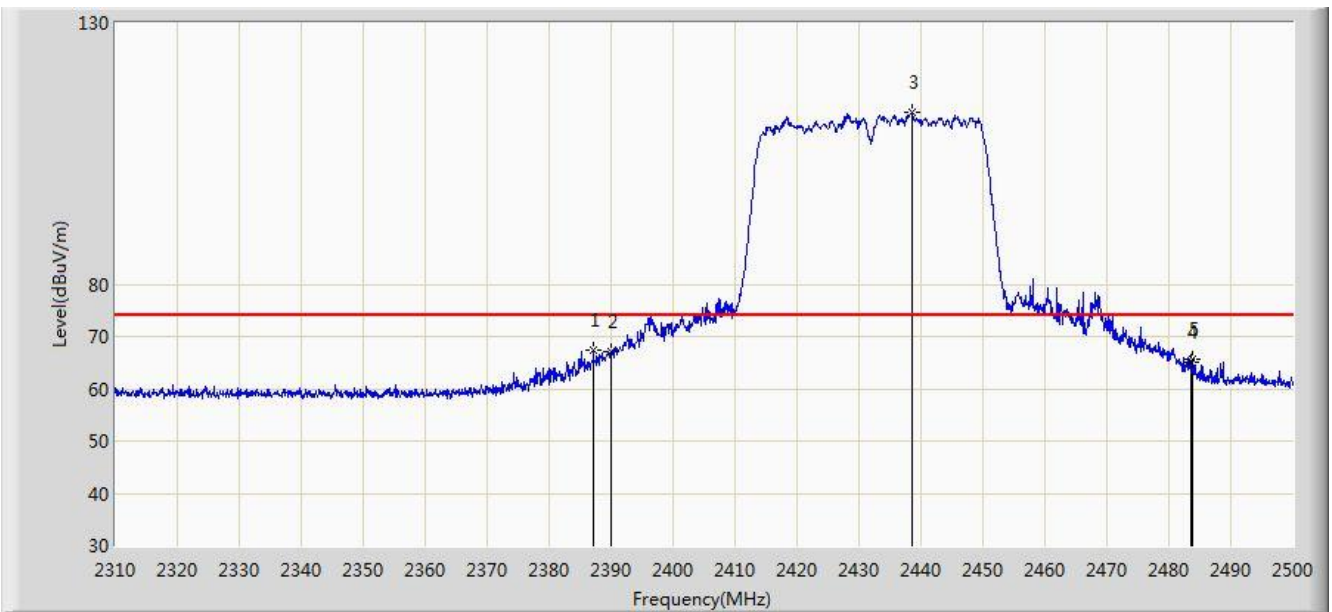


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.140	67.339	34.759	-6.661	74.000	32.579	PK
2			2390.000	67.191	34.616	-6.809	74.000	32.575	PK
3		*	2438.535	112.849	80.336	N/A	N/A	32.513	PK
4			2483.500	64.990	32.394	-9.010	74.000	32.596	PK
5			2483.755	65.728	33.132	-8.272	74.000	32.596	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2018/10/18 - 02:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 2432MHz (CDD Mode) (Worst Polarization)	

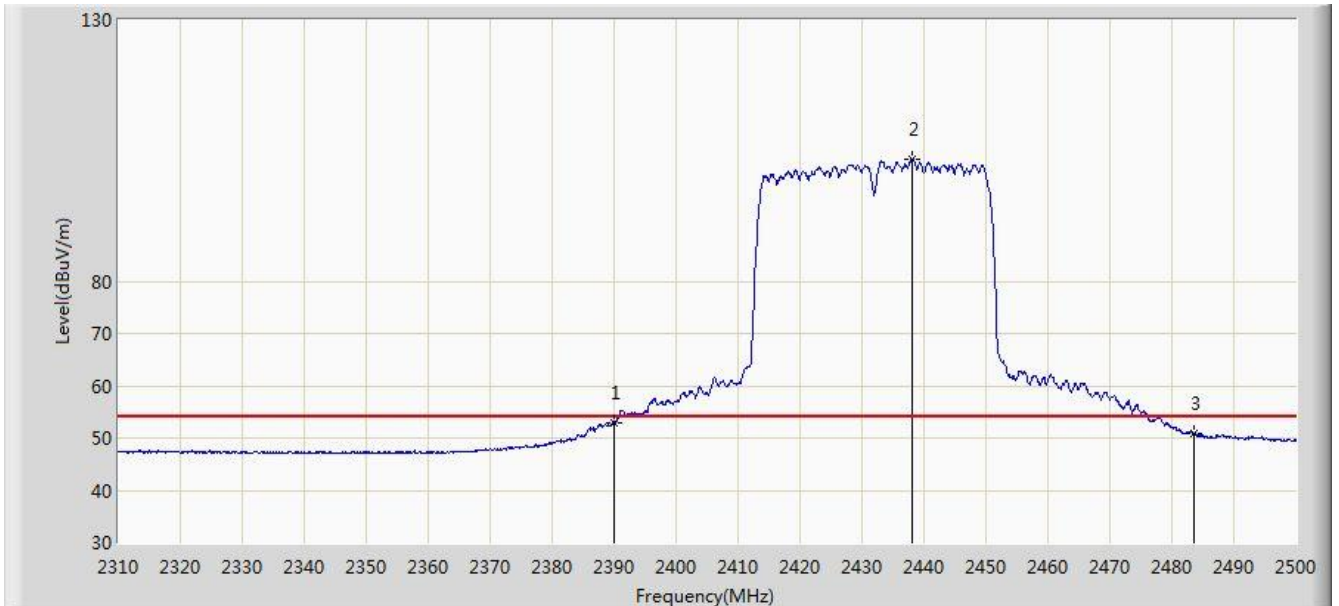


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.790	20.215	-1.210	54.000	32.575	AV
2		*	2438.060	103.462	70.948	N/A	N/A	32.514	AV
3			2483.500	50.796	18.200	-3.204	54.000	32.596	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2018/08/11 - 14:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 2437MHz (CDD Mode)	

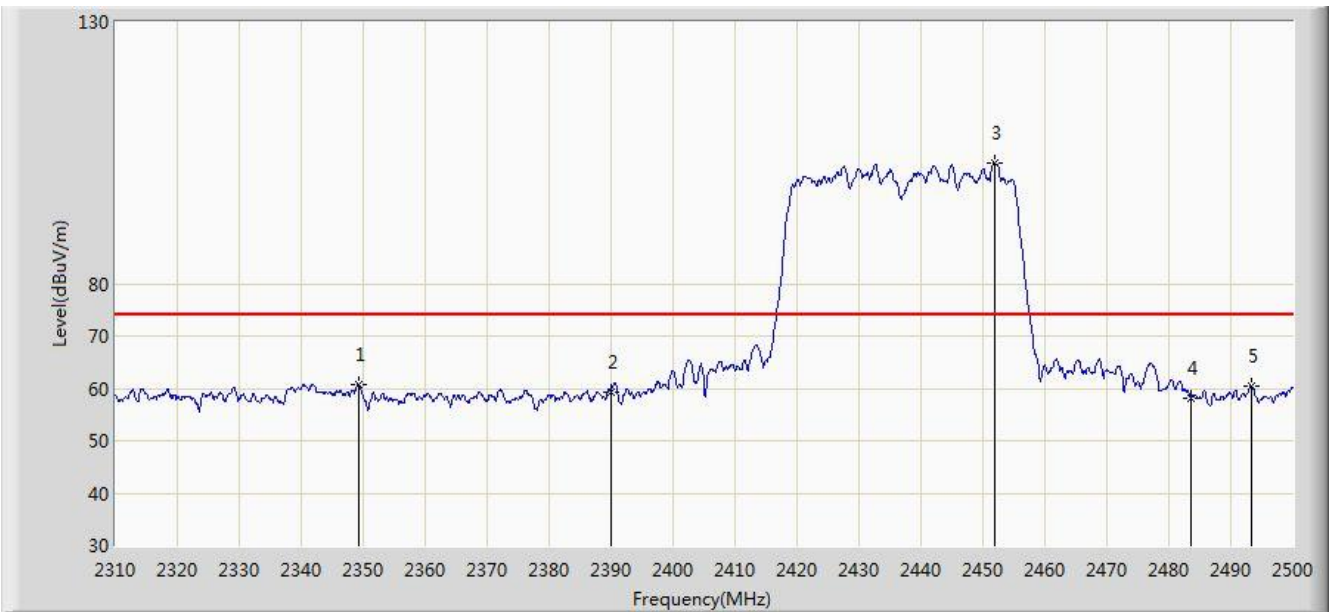


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2349.235	60.791	28.139	-13.209	74.000	32.652	PK
2			2390.000	59.345	26.770	-14.655	74.000	32.575	PK
3			2451.835	103.159	70.642	N/A	N/A	32.517	PK
4			2483.500	58.098	25.502	-15.902	74.000	32.596	PK
5			2493.445	60.424	27.803	-13.576	74.000	32.621	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/11 - 14:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 2437MHz (CDD Mode)	

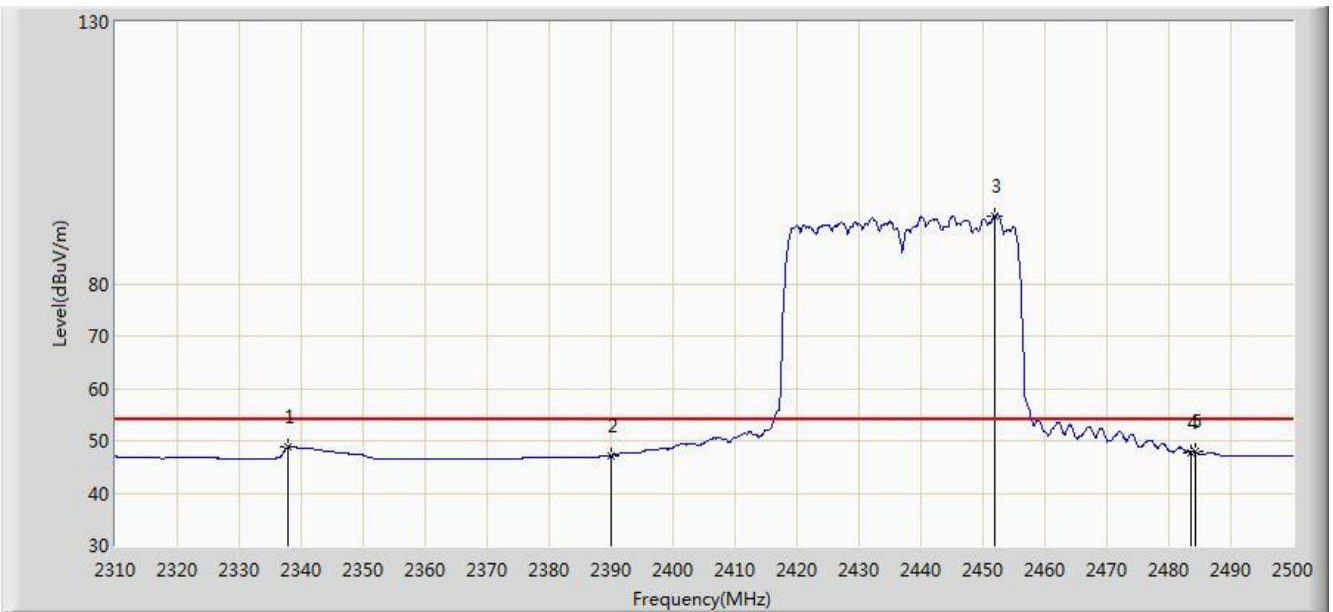


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2337.930	48.790	16.097	-5.210	54.000	32.693	AV
2			2390.000	47.208	14.633	-6.792	54.000	32.575	AV
3			2451.930	92.956	60.438	N/A	N/A	32.517	AV
4			2483.500	47.780	15.184	-6.220	54.000	32.596	AV
5			2484.230	47.931	15.333	-6.069	54.000	32.598	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/11 - 14:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 2437MHz (CDD Mode)	

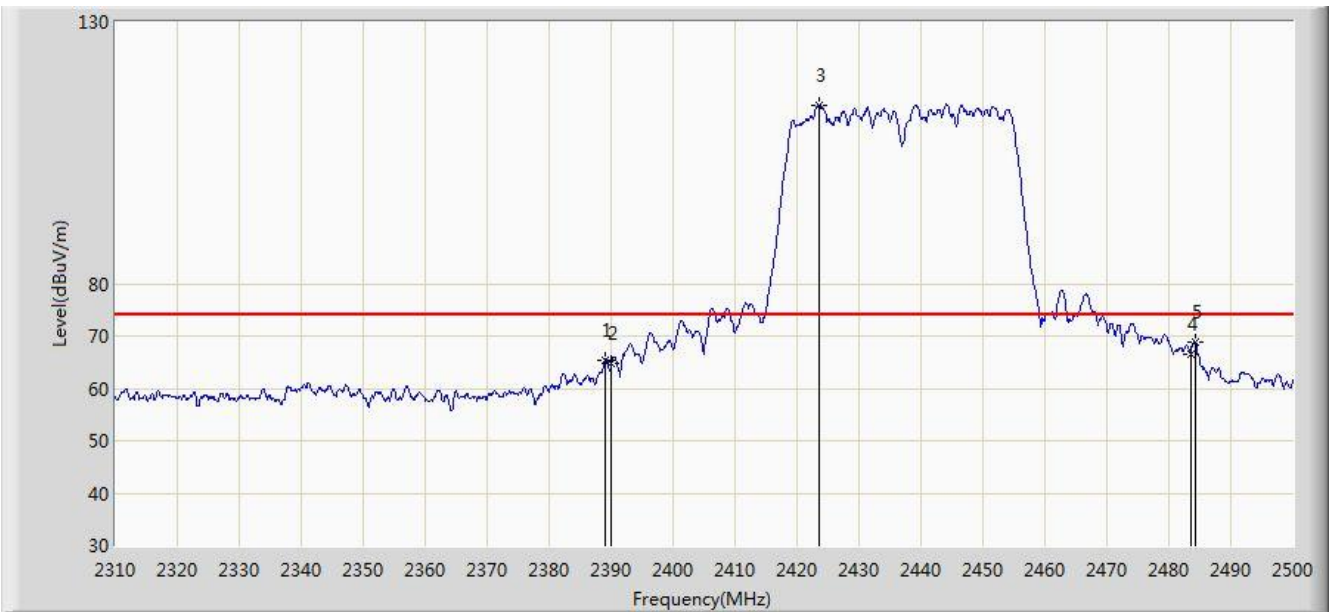


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.040	65.378	32.802	-8.622	74.000	32.576	PK
2			2390.000	64.847	32.272	-9.153	74.000	32.575	PK
3			2423.620	114.139	81.607	N/A	N/A	32.532	PK
4			2483.500	66.653	34.057	-7.347	74.000	32.596	PK
5			2484.230	68.760	36.162	-5.240	74.000	32.598	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/11 - 14:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 2437MHz (CDD Mode)	

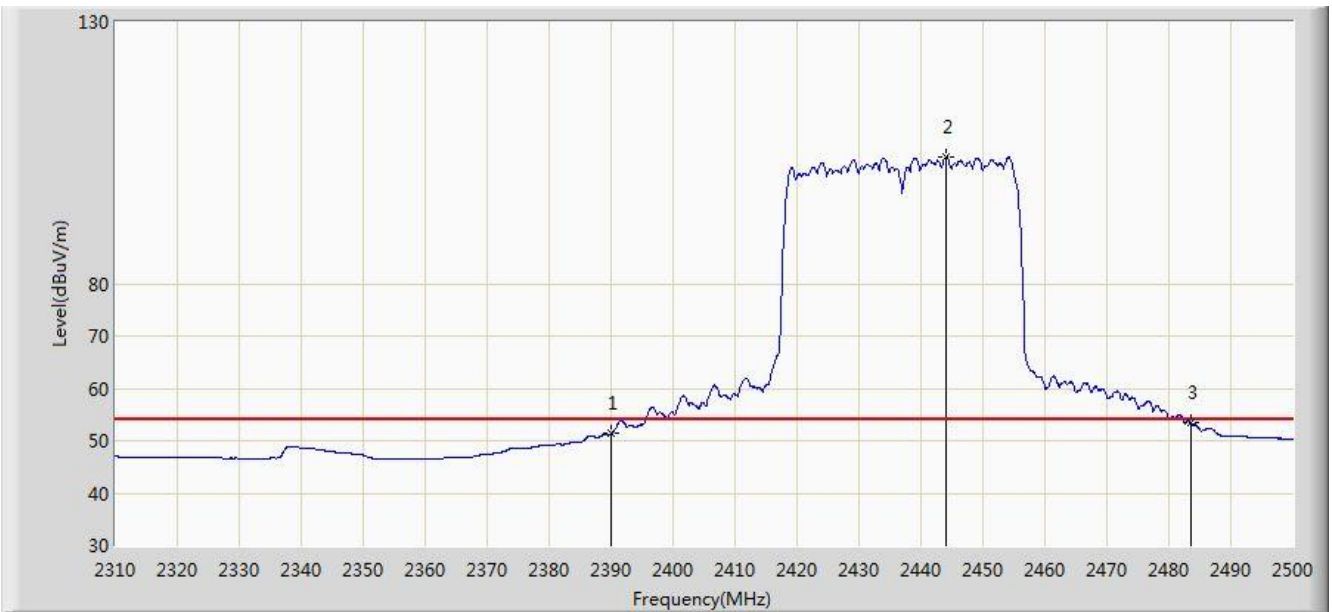


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	51.322	18.747	-2.678	54.000	32.575	AV
2			2443.950	104.204	71.697	N/A	N/A	32.507	AV
3			2483.500	53.386	20.790	-0.614	54.000	32.596	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/11/14 - 17:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 2442MHz (CDD Mode) (Worst Polarization)	

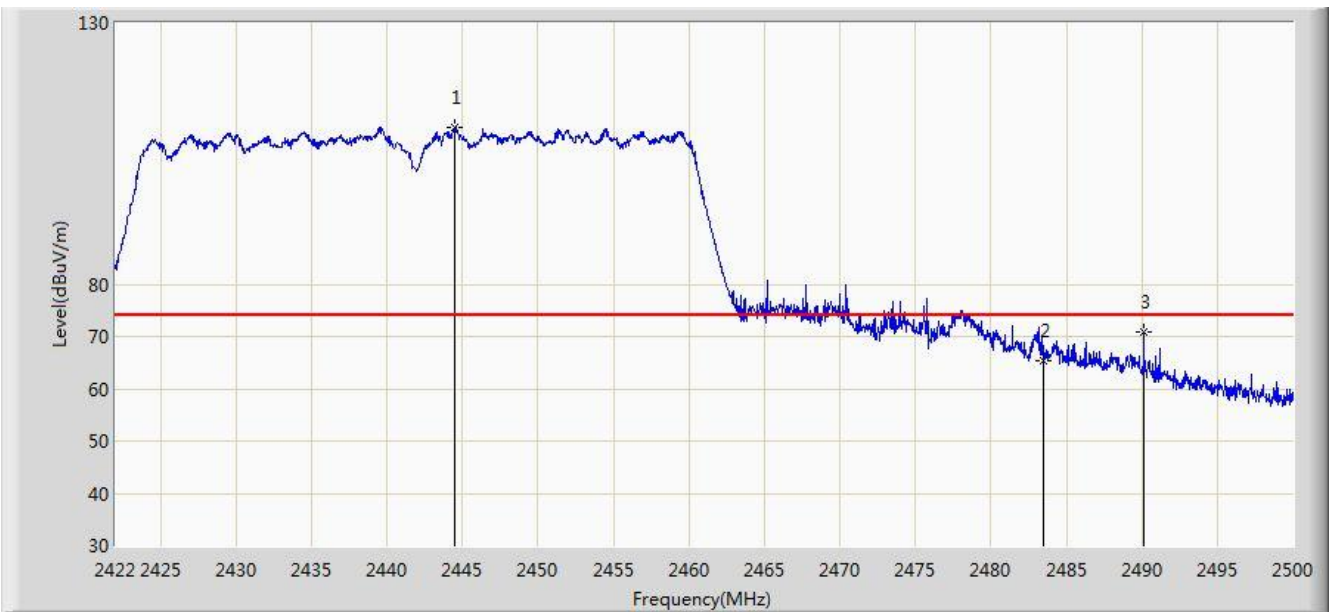


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2444.503	110.058	77.552	N/A	N/A	32.506	PK
2			2483.500	65.422	32.826	-8.578	74.000	32.596	PK
3			2490.133	70.932	38.320	-3.068	74.000	32.613	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2018/10/18 - 03:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 2442MHz (CDD Mode) (Worst Polarization)	

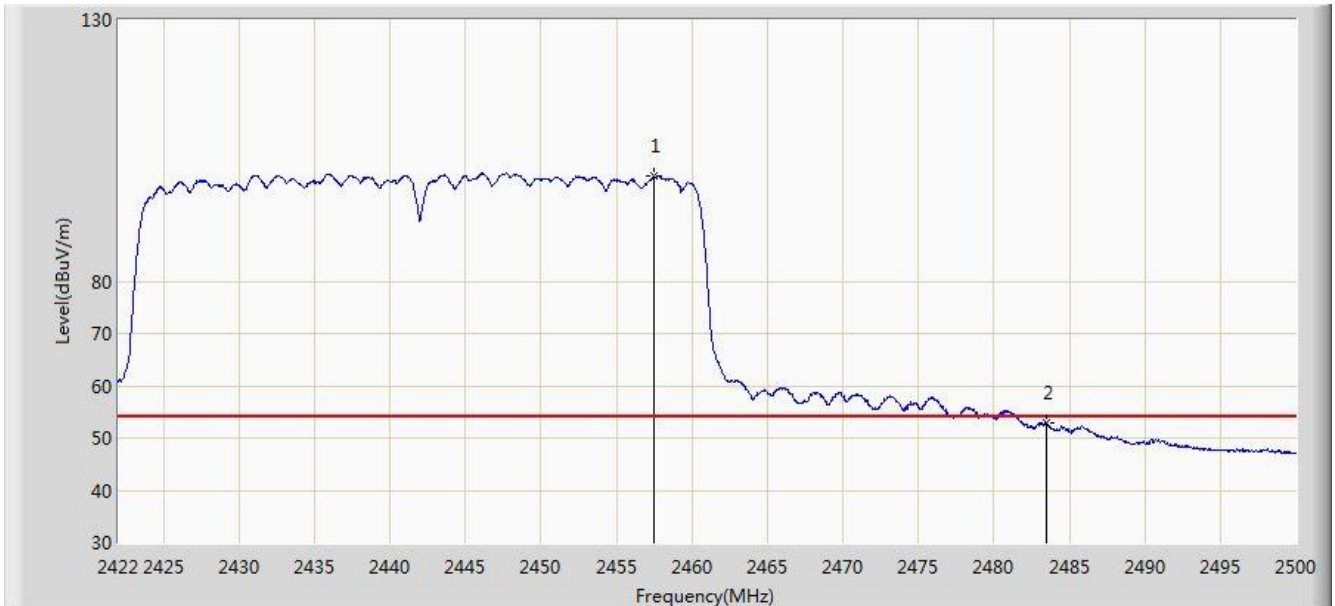


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2457.490	100.062	67.532	N/A	N/A	32.530	AV
2			2483.500	52.880	20.284	-1.120	54.000	32.596	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2018/10/18 - 03:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 2447MHz (CDD Mode) (Worst Polarization)	

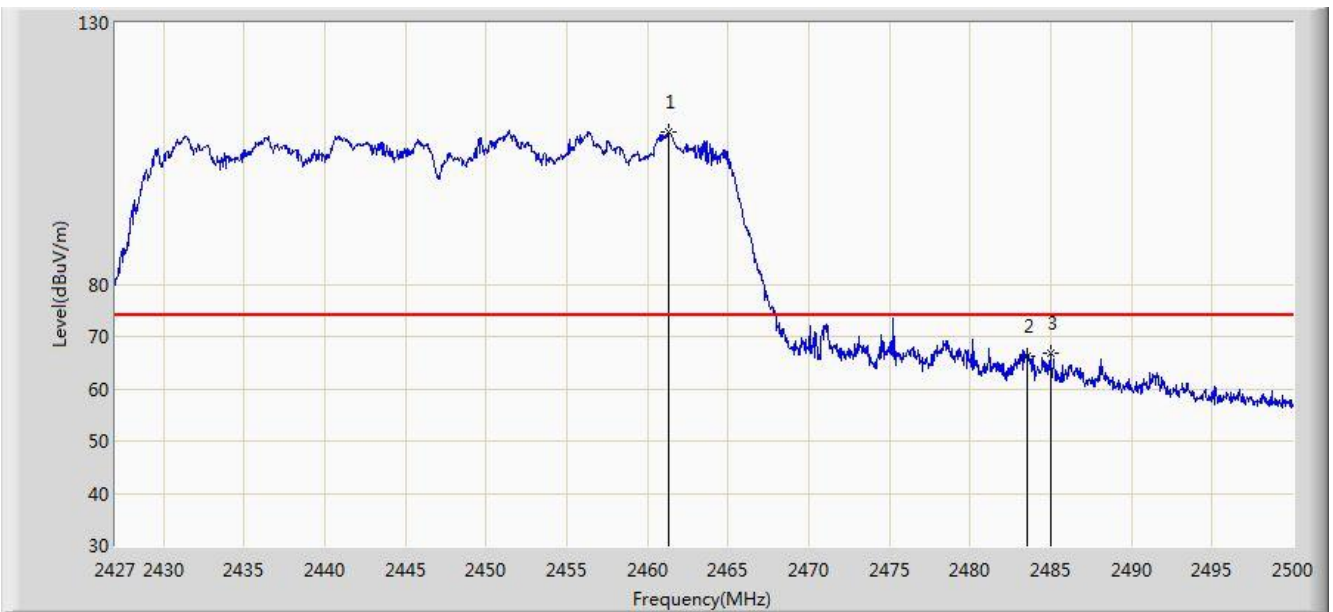


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.346	109.002	76.463	N/A	N/A	32.539	PK
2			2483.500	66.282	33.686	-7.718	74.000	32.596	PK
3			2484.962	66.731	34.132	-7.269	74.000	32.599	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2018/10/18 - 03:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 2447MHz (CDD Mode) (Worst Polarization)	

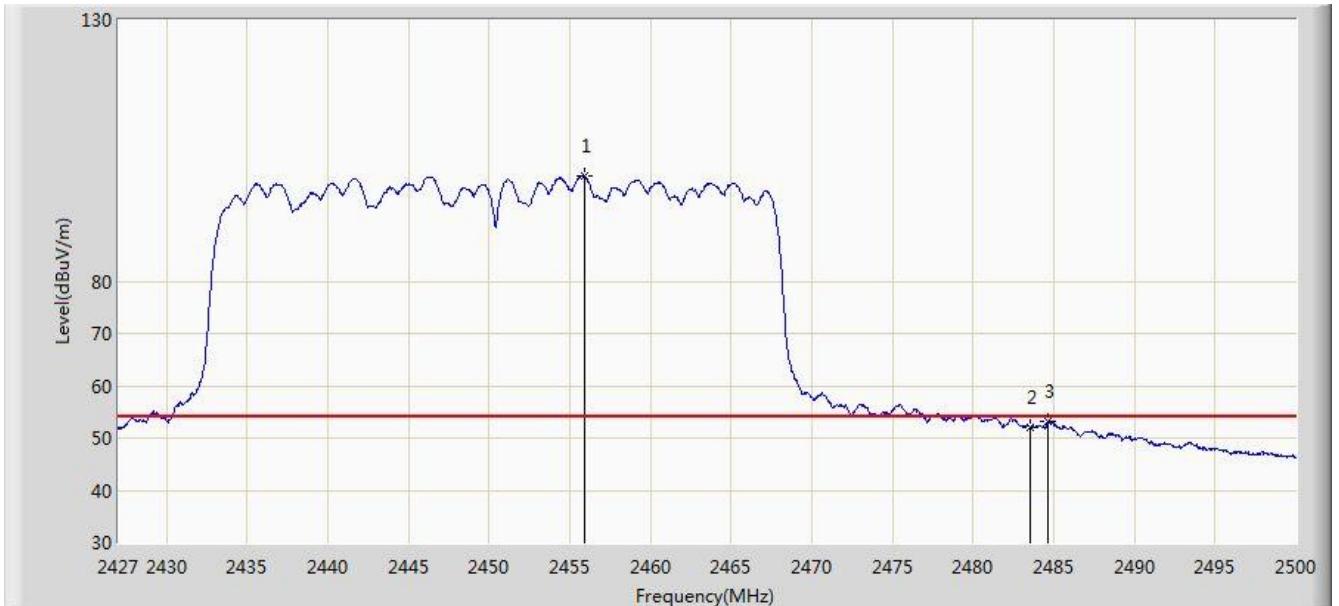


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2455.908	100.099	67.572	N/A	N/A	32.527	AV
2			2483.500	51.954	19.358	-2.046	54.000	32.596	AV
3			2484.670	53.224	20.625	-0.776	54.000	32.599	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2018/08/11 - 15:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 2452MHz (CDD Mode)	

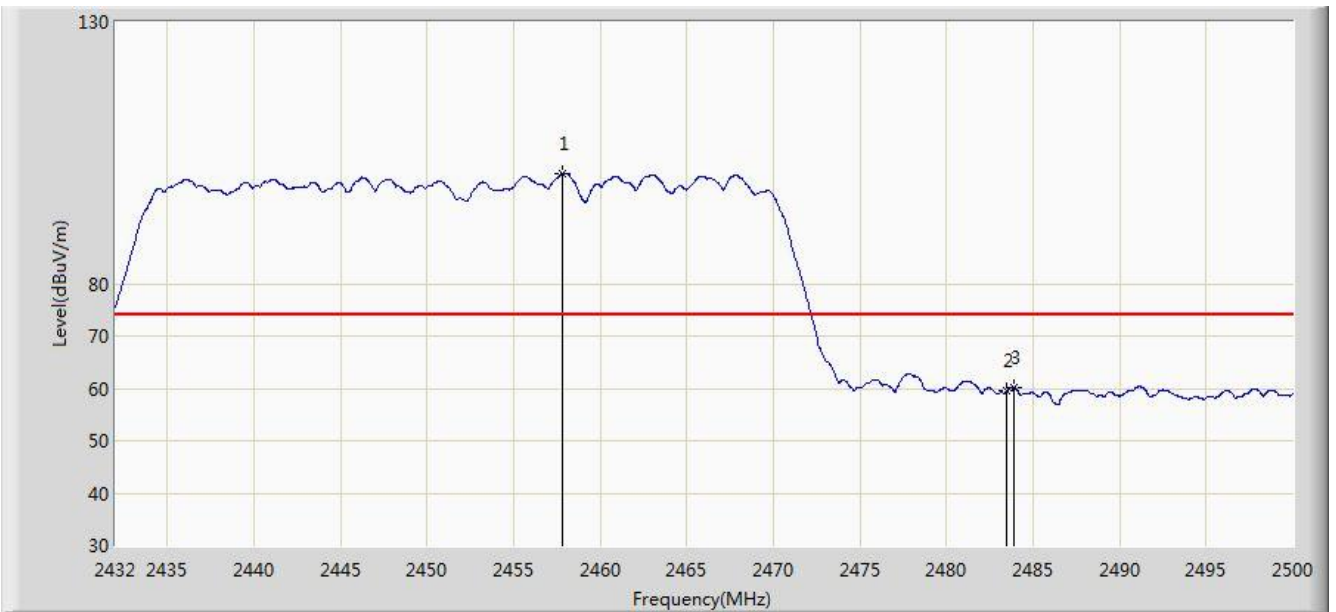


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2457.806	100.987	68.456	N/A	N/A	32.531	PK
2			2483.500	59.529	26.933	-14.471	74.000	32.596	PK
3			2483.884	60.127	27.530	-13.873	74.000	32.596	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/11 - 15:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 2452MHz (CDD Mode)	

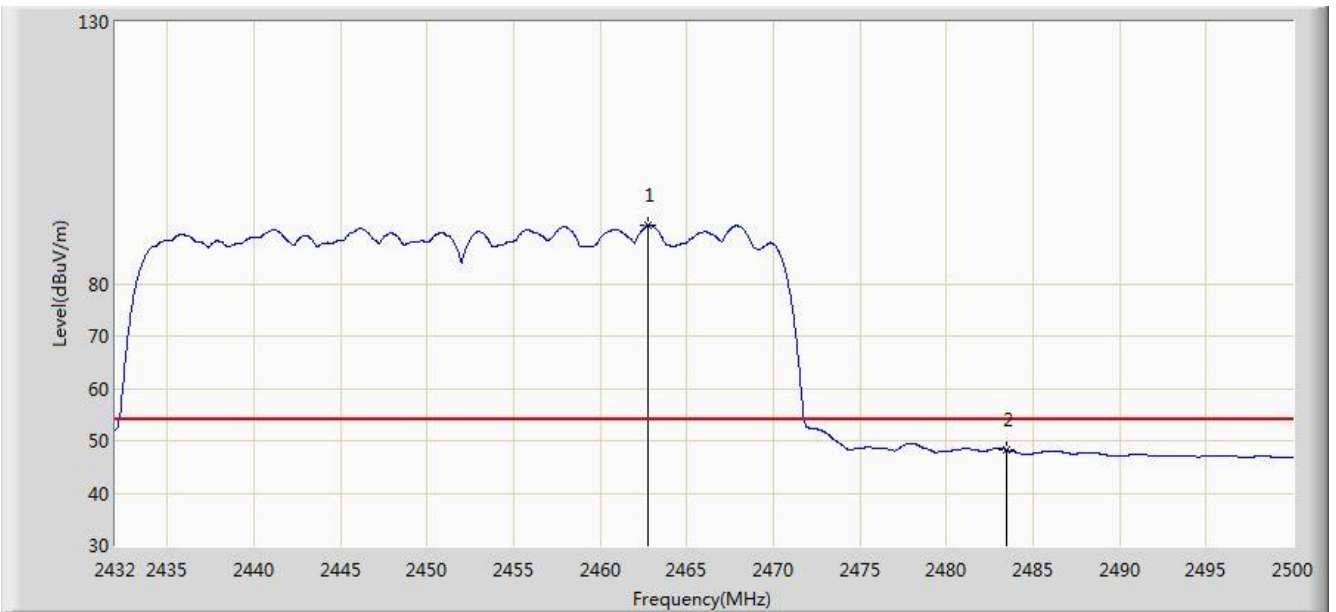


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2462.736	91.052	58.510	N/A	N/A	32.542	AV
2			2483.500	48.249	15.653	-5.751	54.000	32.596	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/11 - 15:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 2452MHz (CDD Mode)	

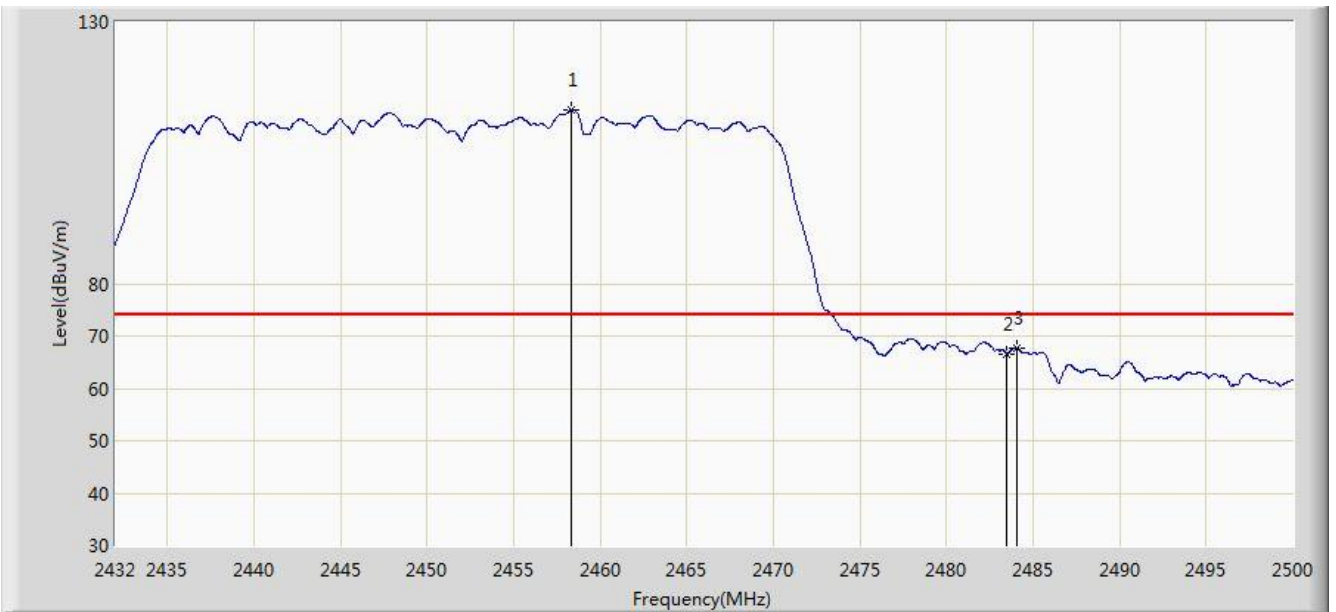


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2458.316	113.113	80.581	N/A	N/A	32.532	PK
2			2483.500	66.645	34.049	-7.355	74.000	32.596	PK
3			2484.088	67.612	35.015	-6.388	74.000	32.598	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/11 - 15:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 2452MHz (CDD Mode)	

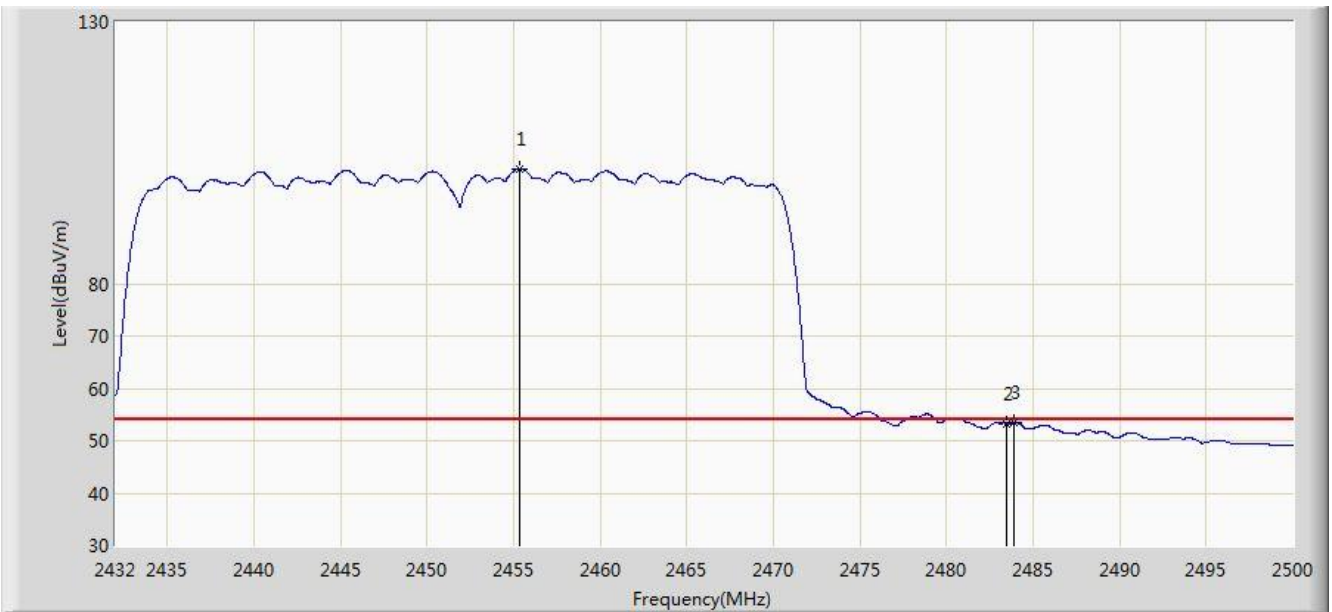


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2455.324	101.912	69.387	N/A	N/A	32.525	AV
2			2483.500	53.111	20.515	-0.889	54.000	32.596	AV
3			2483.884	53.498	20.901	-0.502	54.000	32.596	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/10 - 00:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 2412MHz (CDD Mode)	

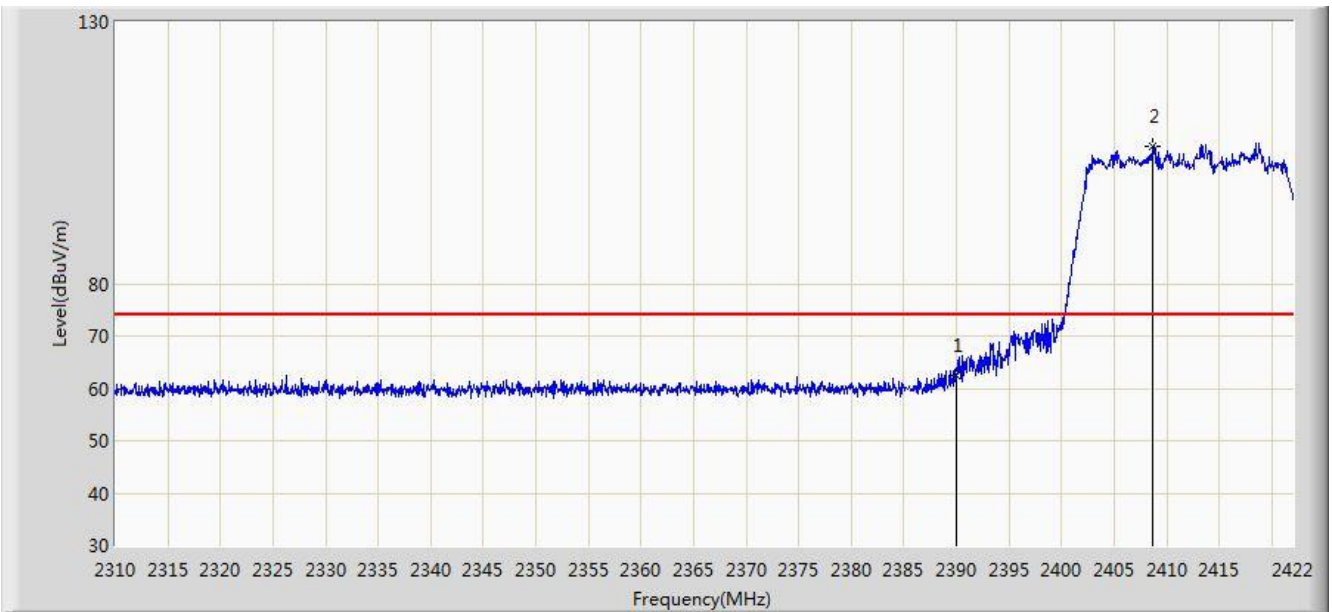


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	62.379	29.804	-11.621	74.000	32.575	PK
2			2408.728	106.245	73.693	N/A	N/A	32.552	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/10 - 00:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 2412MHz (CDD Mode)	

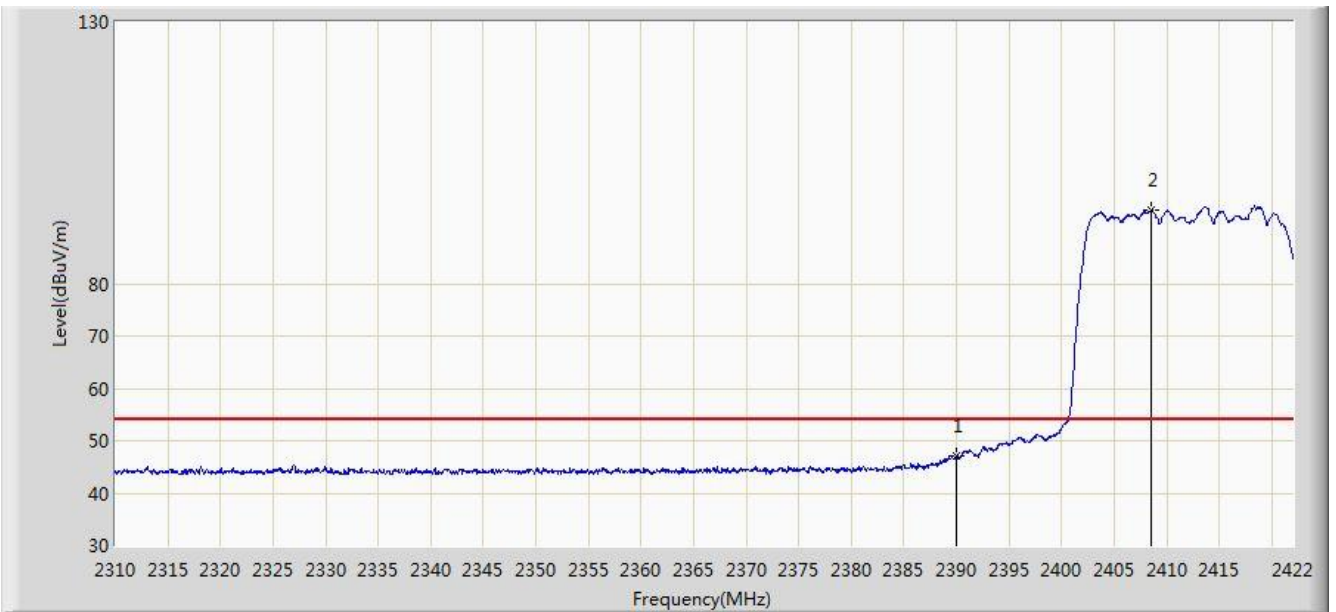


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.960	14.385	-7.040	54.000	32.575	AV
2			2408.504	93.935	61.383	N/A	N/A	32.551	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/10 - 00:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 2412MHz (CDD Mode)	

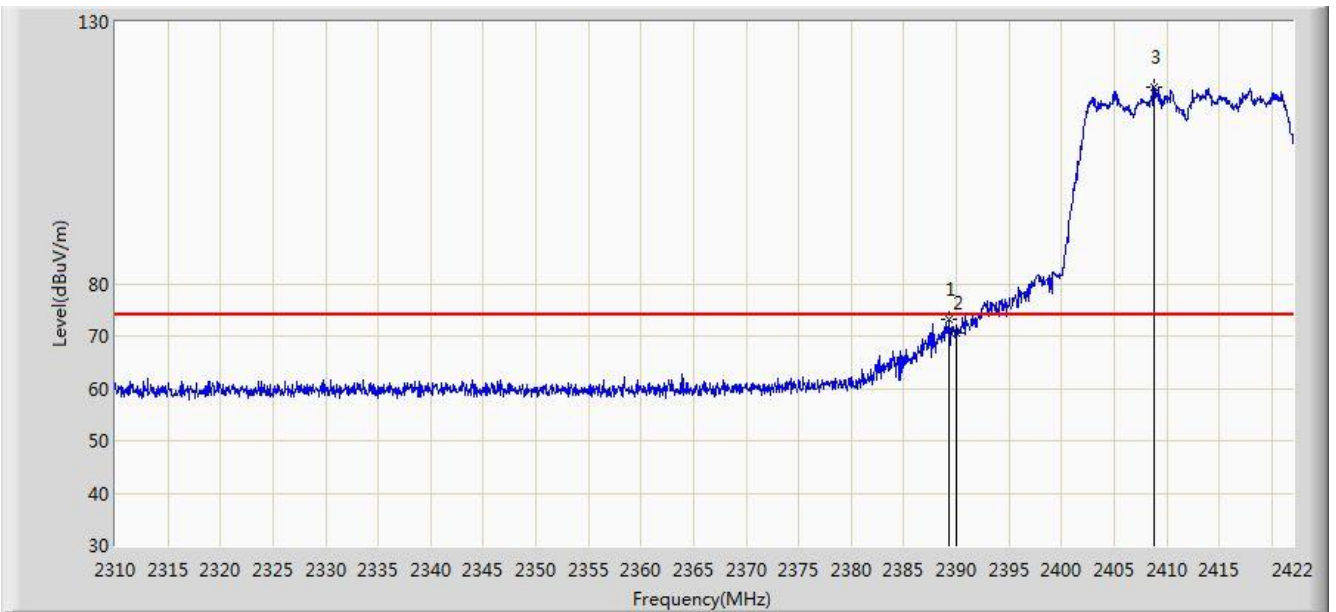


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.240	73.248	40.672	-0.752	74.000	32.576	PK
2			2390.000	70.552	37.977	-3.448	74.000	32.575	PK
3			2408.840	117.624	85.072	N/A	N/A	32.552	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/10 - 00:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 2412MHz (CDD Mode)	

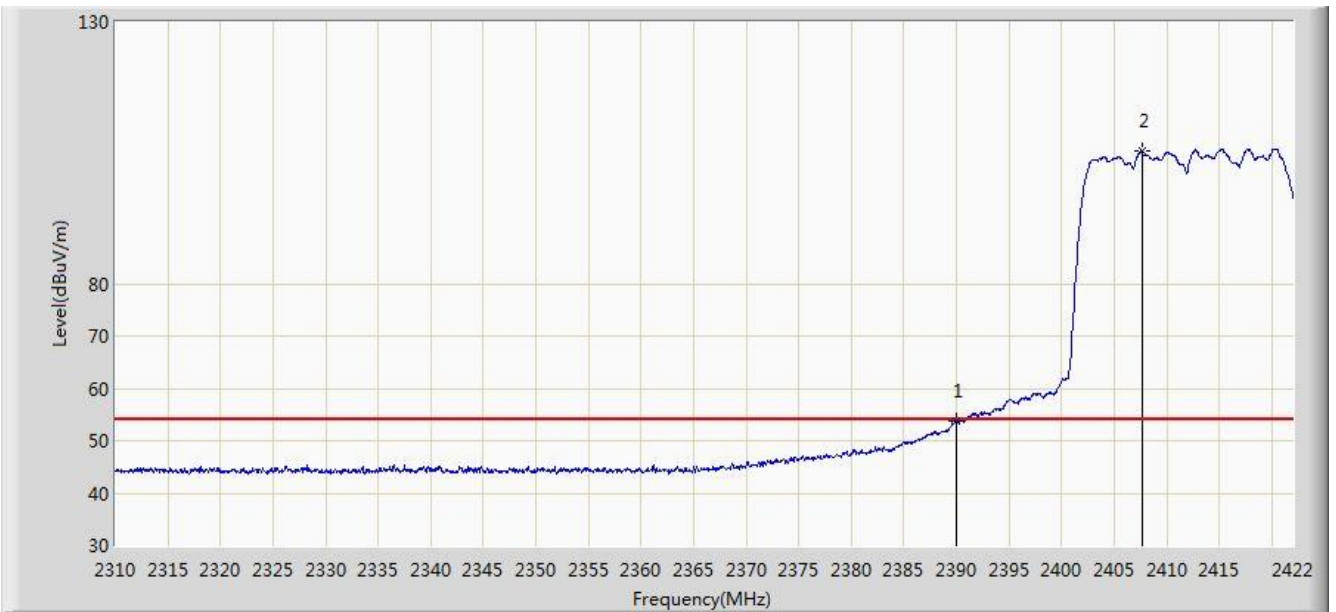


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.714	21.139	-0.286	54.000	32.575	AV
2			2407.664	105.416	72.863	N/A	N/A	32.553	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/10 - 01:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 2417MHz (CDD Mode) (Worst Polarization)	

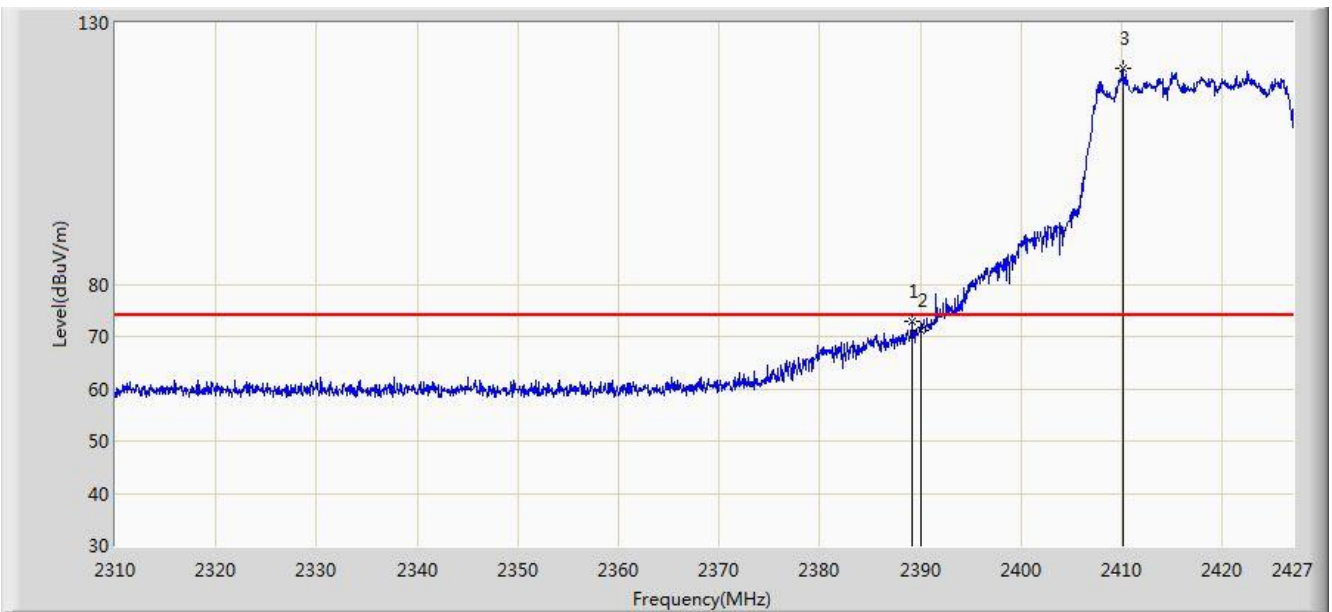


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.209	72.951	40.375	-1.049	74.000	32.576	PK
2			2390.000	71.106	38.531	-2.894	74.000	32.575	PK
3			2410.152	121.252	88.702	N/A	N/A	32.550	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2018/08/10 - 00:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 2417MHz (CDD Mode) (Worst Polarization)	

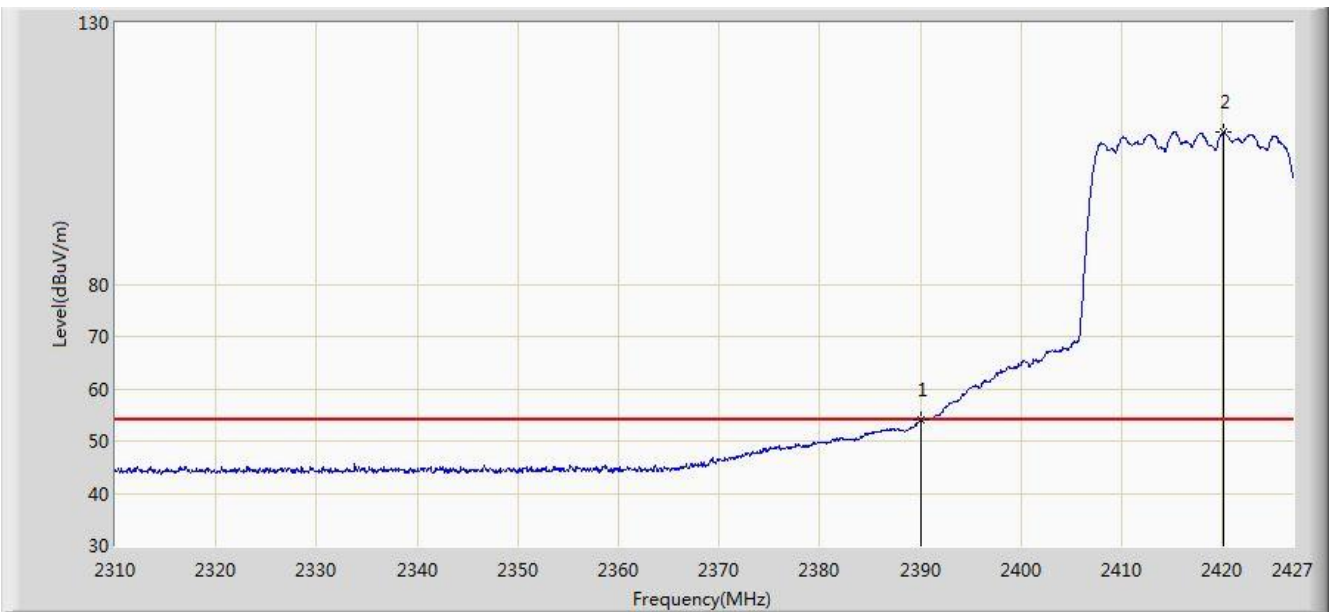


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.985	21.410	-0.015	54.000	32.575	AV
2			2420.156	109.041	76.504	N/A	N/A	32.537	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2018/08/10 - 00:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 2437MHz (CDD Mode)	

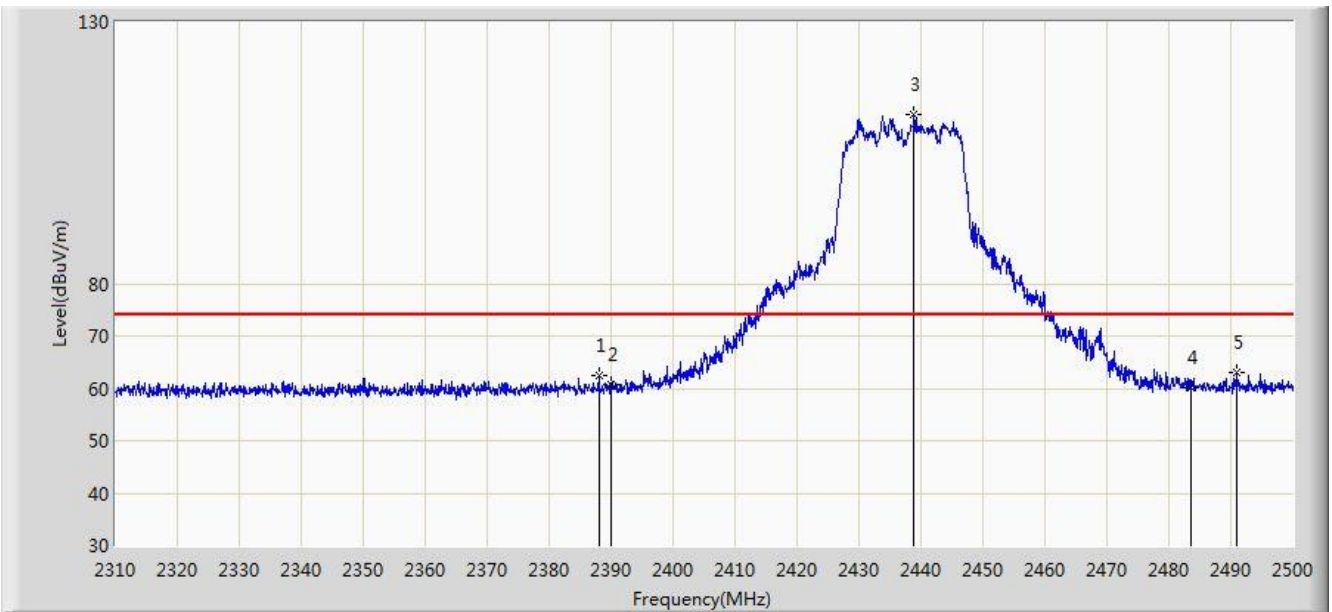


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.995	62.472	29.894	-11.528	74.000	32.578	PK
2			2390.000	60.631	28.056	-13.369	74.000	32.575	PK
3			2438.915	112.198	79.685	N/A	N/A	32.512	PK
4			2483.500	60.273	27.677	-13.727	74.000	32.596	PK
5			2490.880	62.917	30.303	-11.083	74.000	32.614	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/10 - 00:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 2437MHz (CDD Mode)	

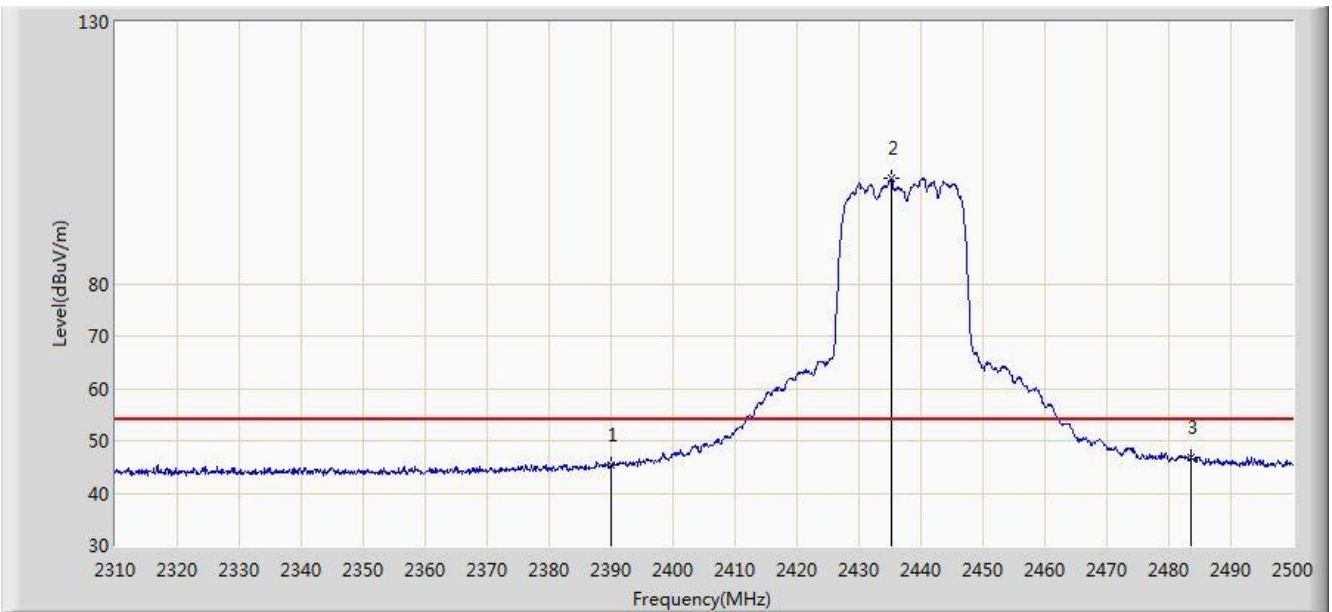


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	45.364	12.789	-8.636	54.000	32.575	AV
2			2435.210	100.057	67.540	N/A	N/A	32.517	AV
3			2483.500	46.705	14.109	-7.295	54.000	32.596	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/10 - 00:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 2437MHz (CDD Mode)	

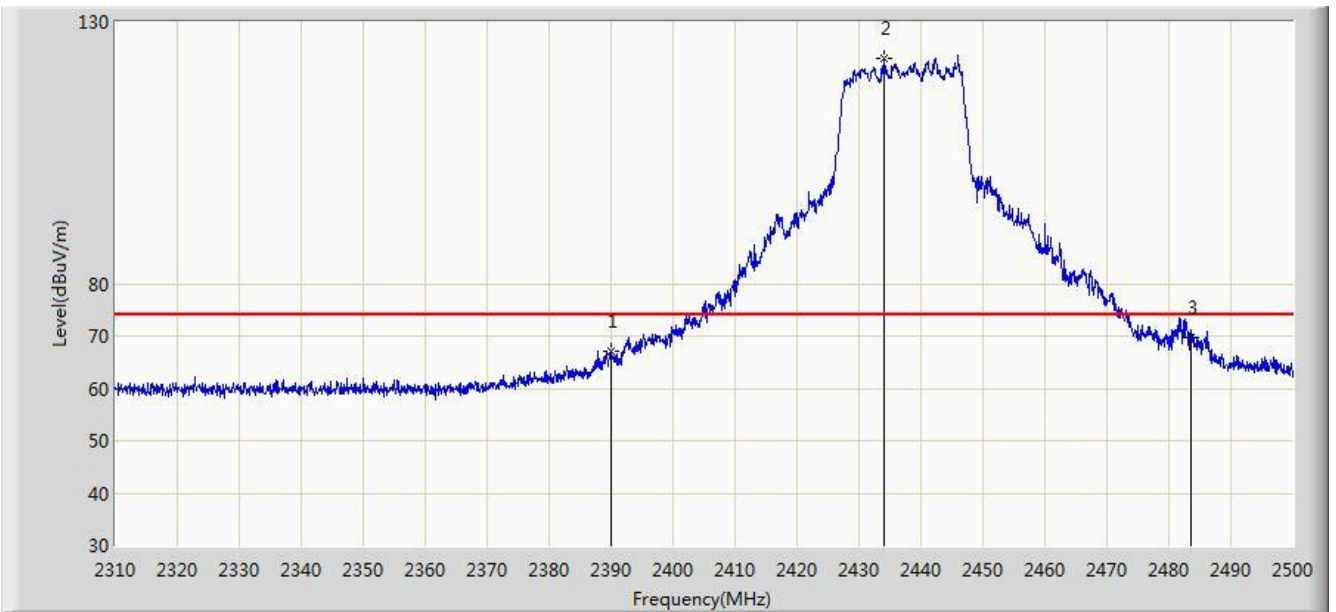

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	66.968	34.393	-7.032	74.000	32.575	PK
2			2434.070	122.994	90.475	N/A	N/A	32.518	PK
3			2483.500	69.684	37.088	-4.316	74.000	32.596	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)