


EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.4°C /40.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5510MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

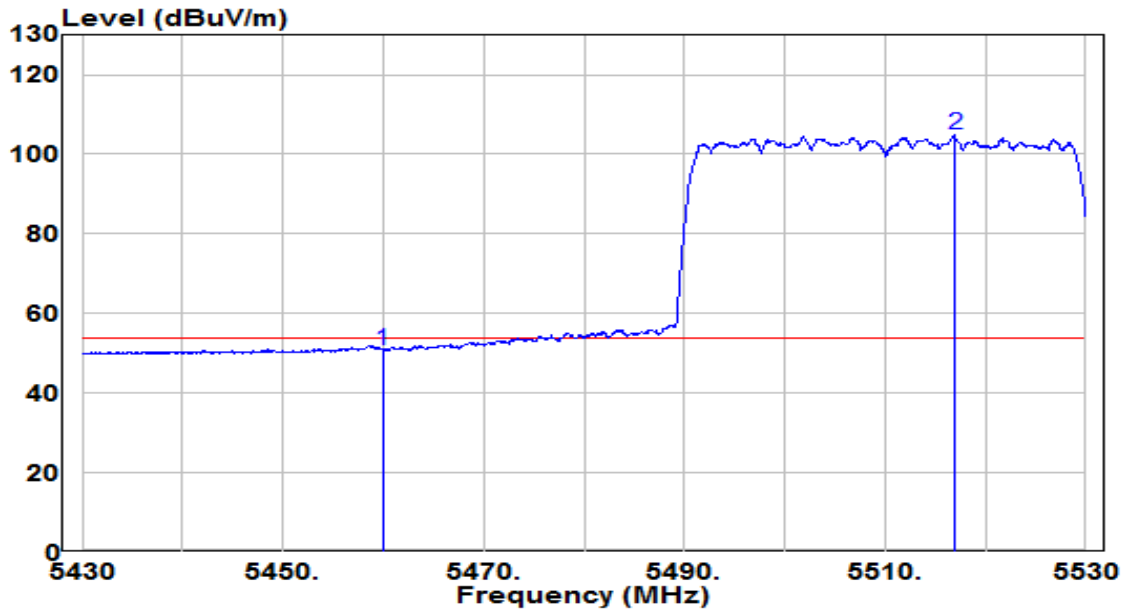


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	31.02	19.84	50.86	-3.14	54.00	Average
2	* 5516.950	84.78	19.94	104.71	N/A	N/A	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.4°C /40.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5670MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

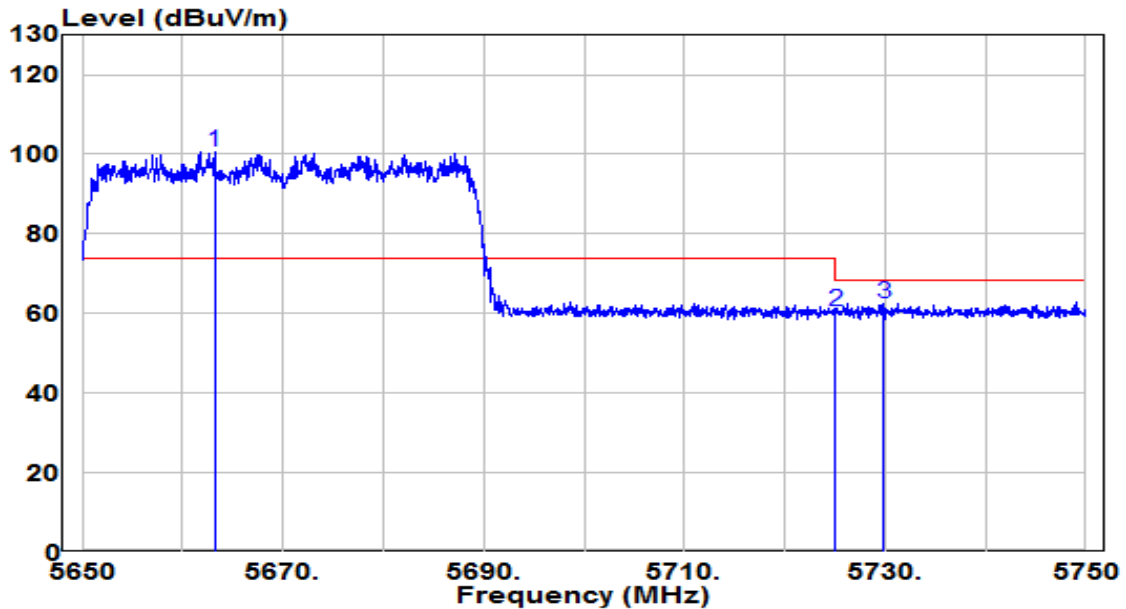


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5663.200	79.98	20.50	100.47	N/A	N/A	Peak
2	5725.000	39.86	20.73	60.60	-7.60	68.20	Peak
3	5729.900	41.66	20.75	62.41	-5.79	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.4°C /40.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5670MHz(CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

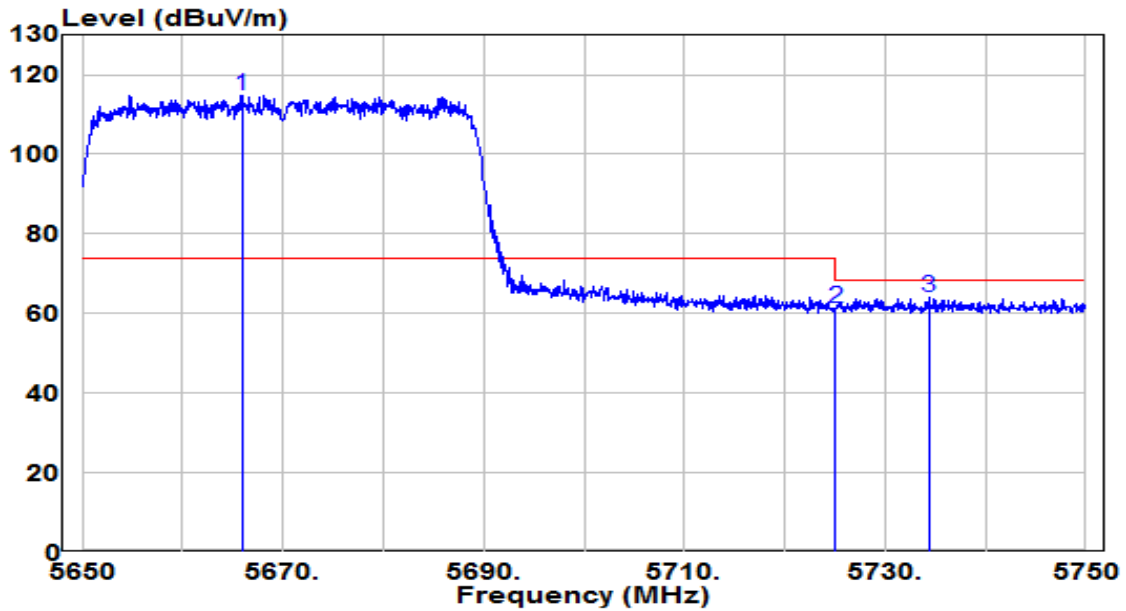


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5665.900	94.26	20.51	114.77	N/A	N/A	Peak
2	5725.000	40.64	20.73	61.38	-6.82	68.20	Peak
3	5734.350	43.11	20.77	63.87	-4.33	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.4°C /40.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5755MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

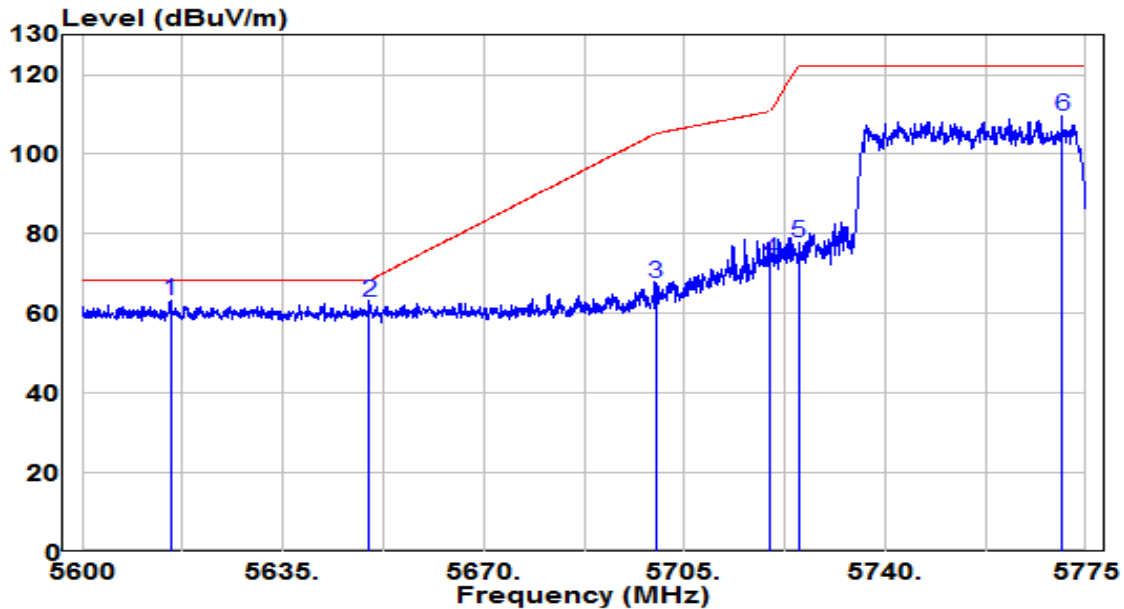


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5615.400	42.86	20.31	63.18	-5.02	68.20	Peak
2	5650.000	42.42	20.45	62.86	-5.34	68.20	Peak
3	5700.000	46.91	20.64	67.55	-37.65	105.20	Peak
4	5720.000	52.59	20.71	73.30	-37.50	110.80	Peak
5	5725.000	57.05	20.73	77.79	-44.41	122.20	Peak
6	5770.800	88.65	20.91	109.56	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.4°C /40.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5755MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

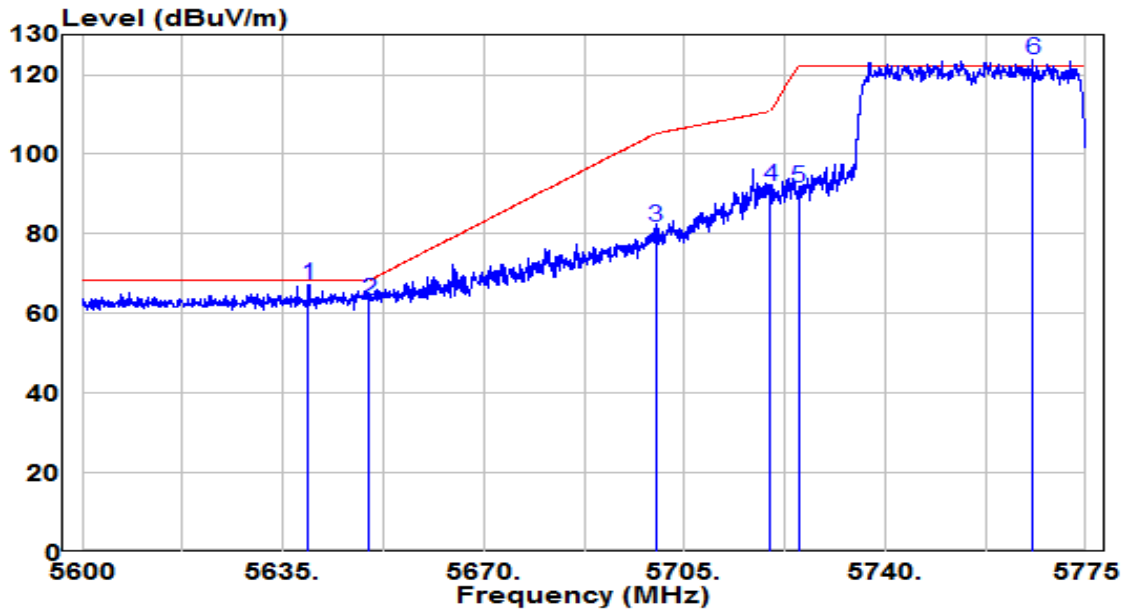


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5639.462	46.77	20.41	67.18	-1.02	68.20	Peak
2	5650.000	42.73	20.45	63.18	-5.02	68.20	Peak
3	5700.000	61.13	20.64	81.76	-23.44	105.20	Peak
4	5720.000	71.15	20.71	91.86	-18.94	110.80	Peak
5	5725.000	70.94	20.73	91.67	-30.53	122.20	Peak
6	* 5765.725	102.75	20.89	123.64	N/A	N/A	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.4°C /40.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5795MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

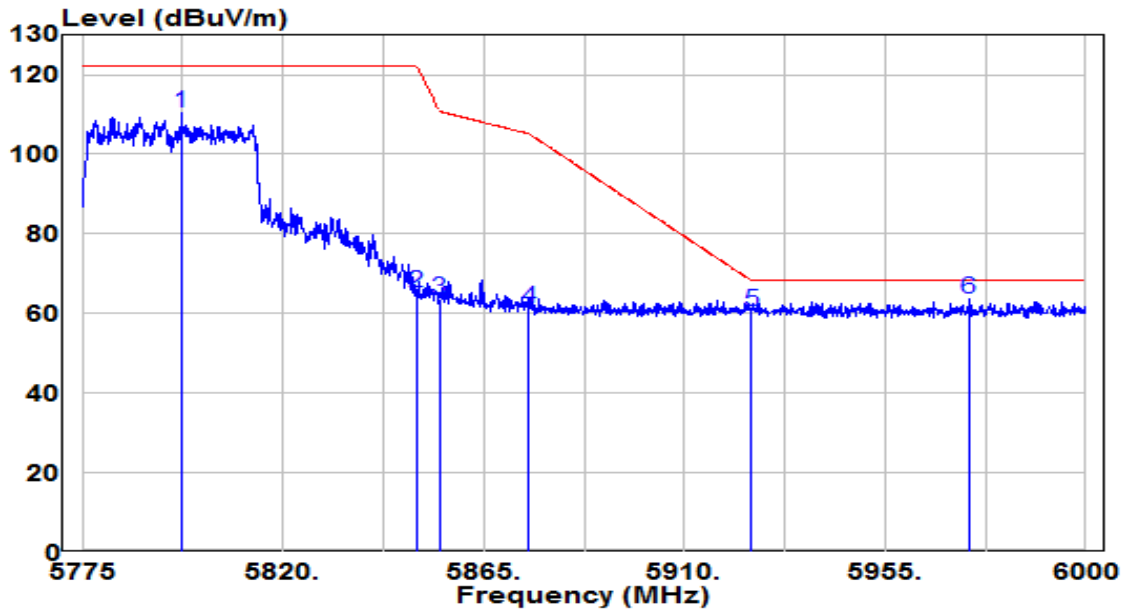


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5797.275	89.18	21.01	110.19	N/A	N/A	Peak
2	5850.000	43.80	21.21	65.02	-57.18	122.20	Peak
3	5855.000	42.48	21.23	63.72	-47.08	110.80	Peak
4	5875.000	40.05	21.31	61.36	-43.84	105.20	Peak
5	5925.000	39.18	21.50	60.68	-7.52	68.20	Peak
6	* 5973.788	41.77	21.69	63.46	-4.74	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.4°C /40.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5795MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

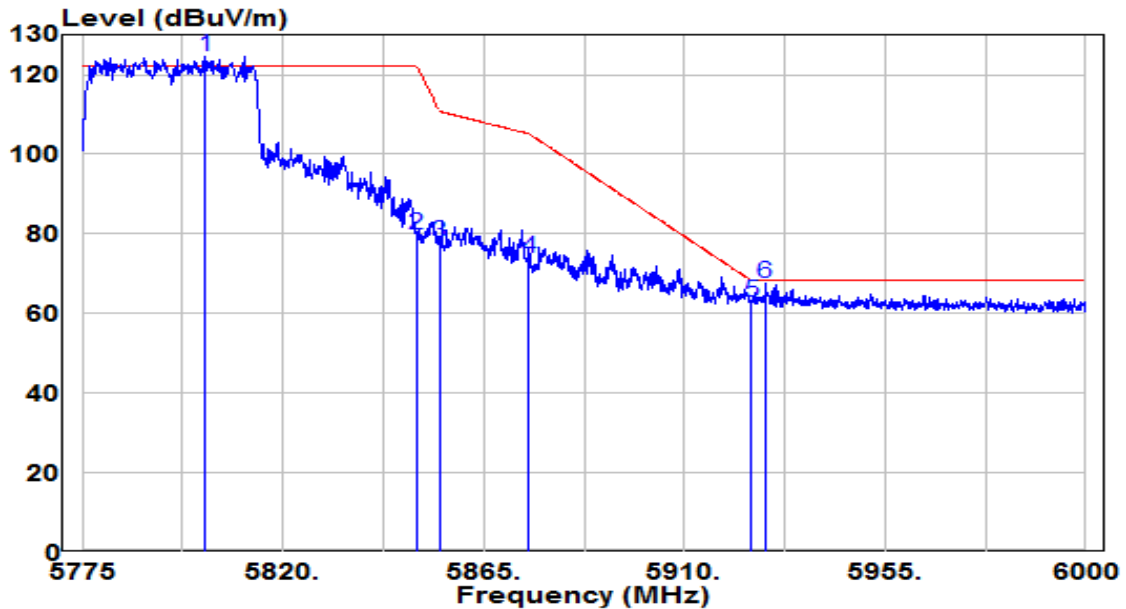


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5802.675	103.58	21.03	124.61	N/A	N/A	Peak
2	5850.000	58.34	21.21	79.55	-42.65	122.20	Peak
3	5855.000	56.70	21.23	77.93	-32.87	110.80	Peak
4	5875.000	52.43	21.31	73.74	-31.46	105.20	Peak
5	5925.000	41.44	21.50	62.94	-5.26	68.20	Peak
6	5928.112	45.90	21.51	67.41	-0.79	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.4°C /40.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5210MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

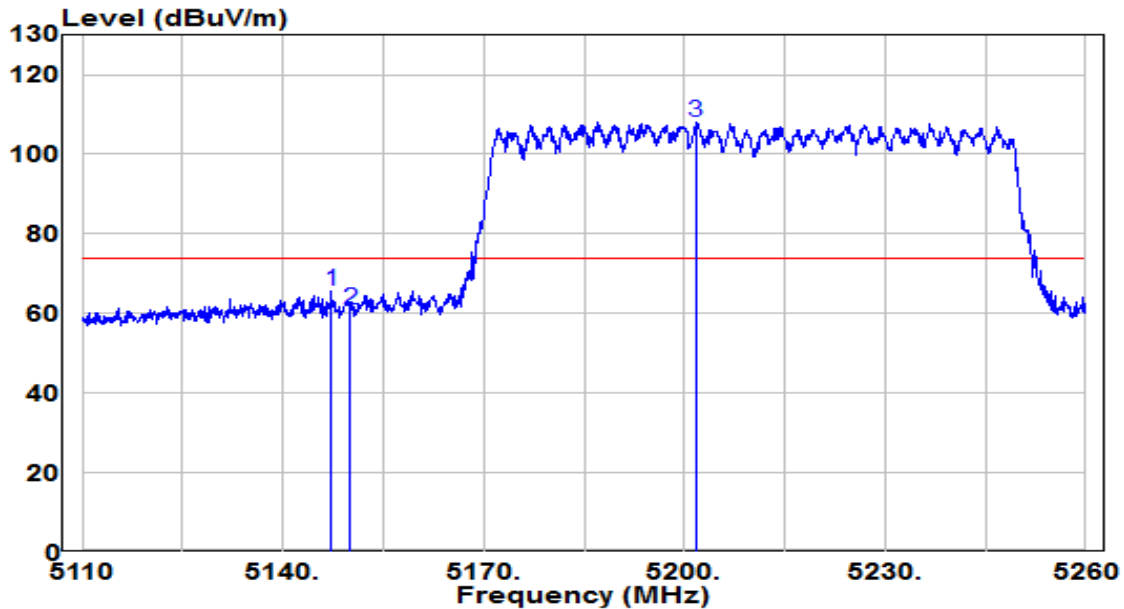


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5147.200	45.79	19.64	65.44	-8.56	74.00	Peak
2	5150.000	41.37	19.65	61.02	-12.98	74.00	Peak
3	* 5201.650	88.49	19.68	108.16	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.4°C /40.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5210MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

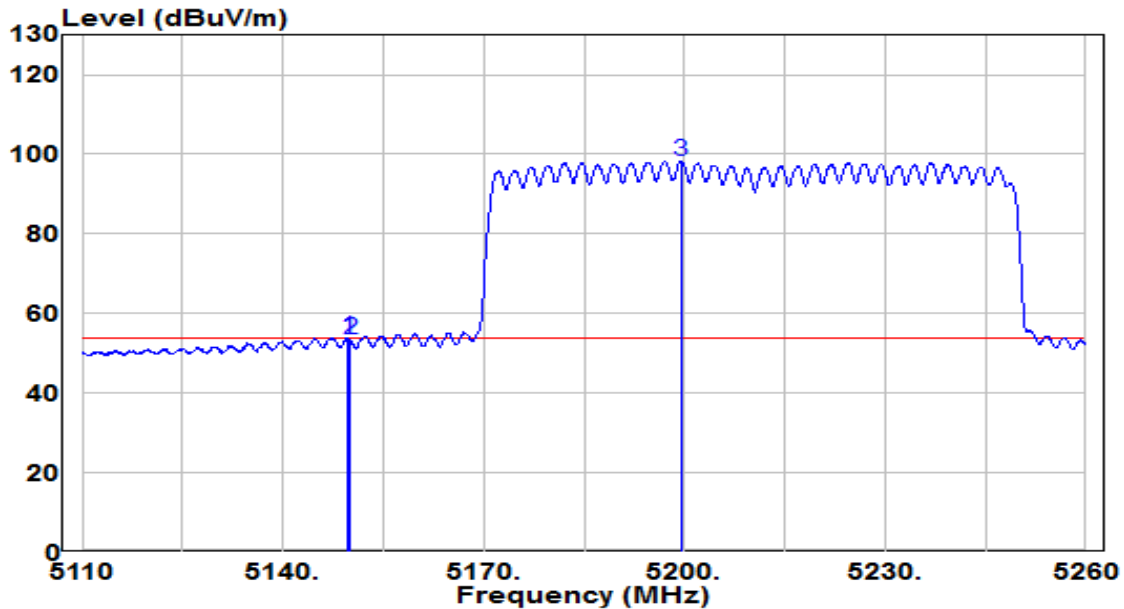


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.750	34.31	19.65	53.96	-0.04	54.00	Average
2	5150.000	33.95	19.65	53.60	-0.40	54.00	Average
3	* 5199.475	78.71	19.68	98.39	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.4°C /40.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5210MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

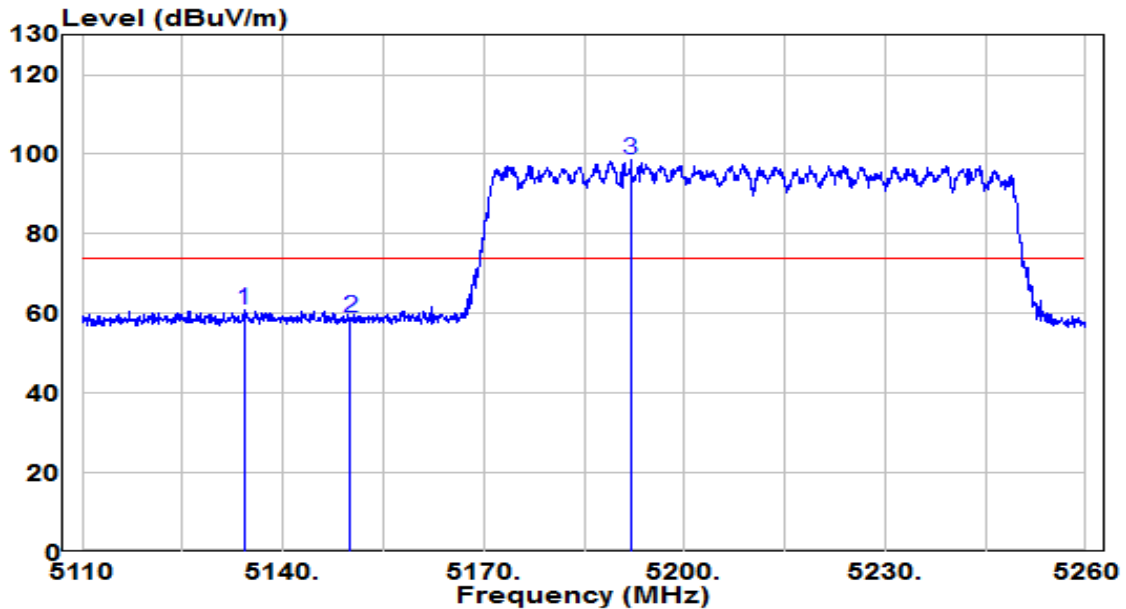


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5134.150	41.31	19.64	60.95	-13.05	74.00	Peak
2	5150.000	39.11	19.65	58.75	-15.25	74.00	Peak
3	* 5191.975	78.75	19.67	98.42	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.4°C /40.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5210MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

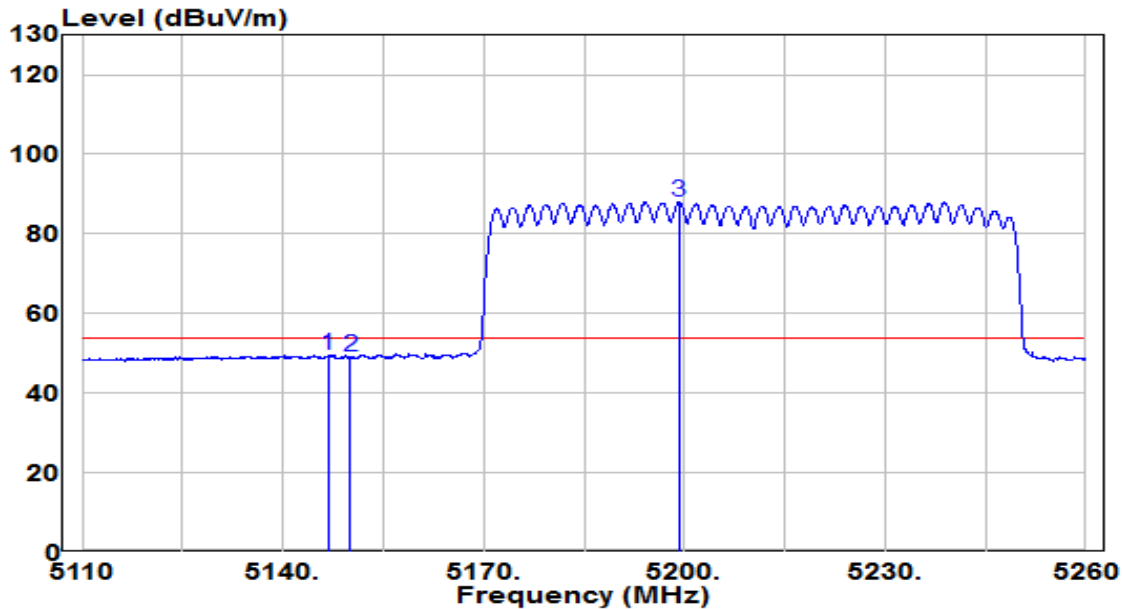


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5146.825	29.90	19.64	49.55	-4.45	54.00	Average
2	5150.000	29.28	19.65	48.92	-5.08	54.00	Average
3	* 5199.175	68.24	19.68	87.91	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.4°C /40.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5530MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

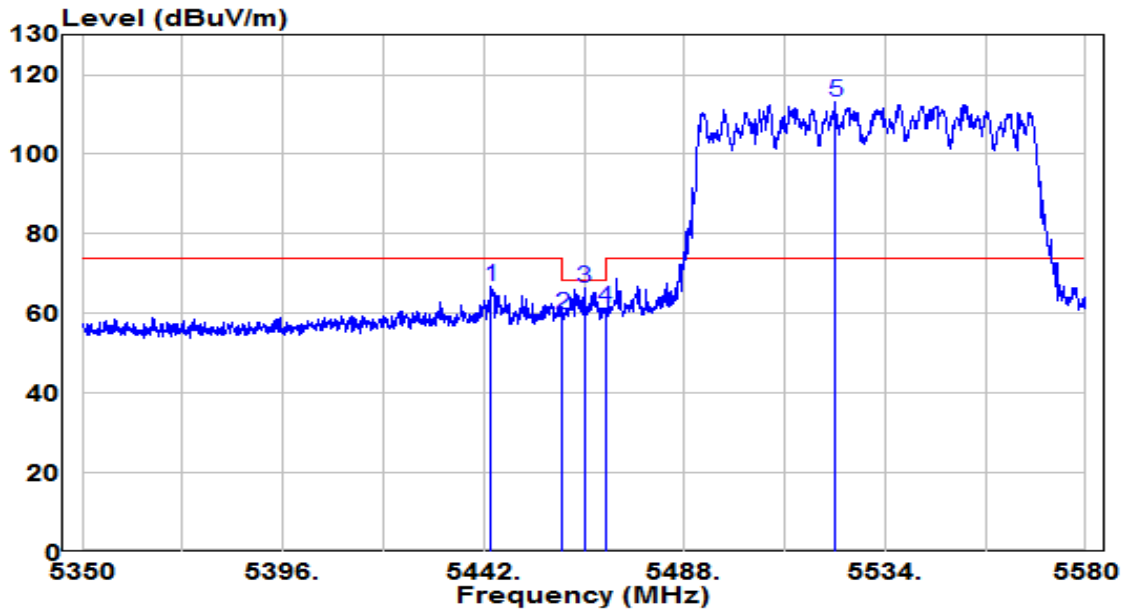


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5443.725	46.80	19.83	66.63	-7.37	74.00	Peak
2	5460.000	40.00	19.84	59.84	-8.36	68.20	Peak
3	5465.115	46.64	19.85	66.49	-1.71	68.20	Peak
4	5470.000	41.57	19.85	61.42	-6.78	68.20	Peak
5	* 5522.500	93.01	19.96	112.96	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.4°C /40.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5530MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

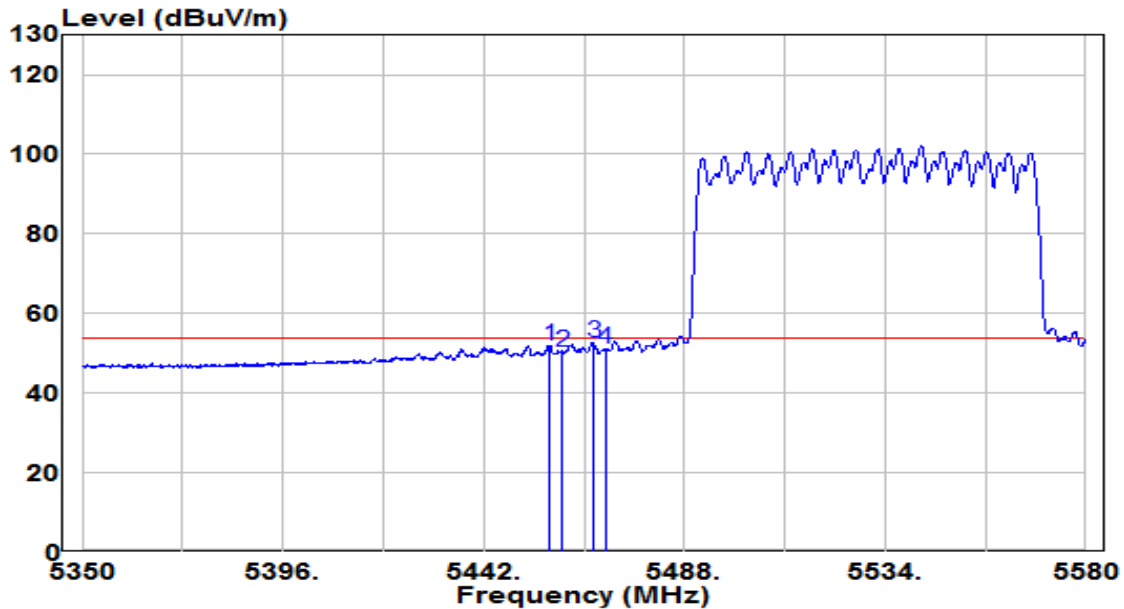


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5457.180	32.11	19.84	51.95	-2.05	54.00	Average
2	5460.000	30.50	19.84	50.34	-3.66	54.00	Average
3	* 5467.185	32.91	19.85	52.76	-1.24	54.00	Average
4	5470.000	31.23	19.85	51.08	-2.92	54.00	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.4°C /40.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5530MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

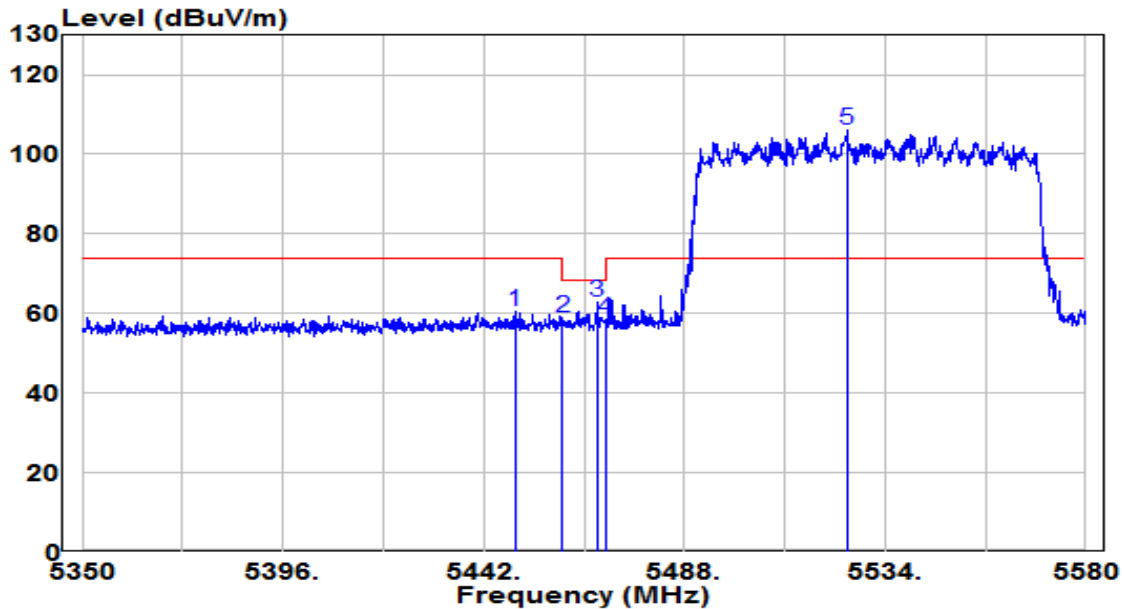


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5449.130	40.66	19.84	60.50	-13.50	74.00	Peak
2	5460.000	38.95	19.84	58.79	-9.41	68.20	Peak
3	5467.990	43.17	19.85	63.02	-5.18	68.20	Peak
4	5470.000	38.66	19.85	58.51	-9.69	68.20	Peak
5	* 5525.260	86.03	19.97	106.00	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.4°C /40.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5530MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

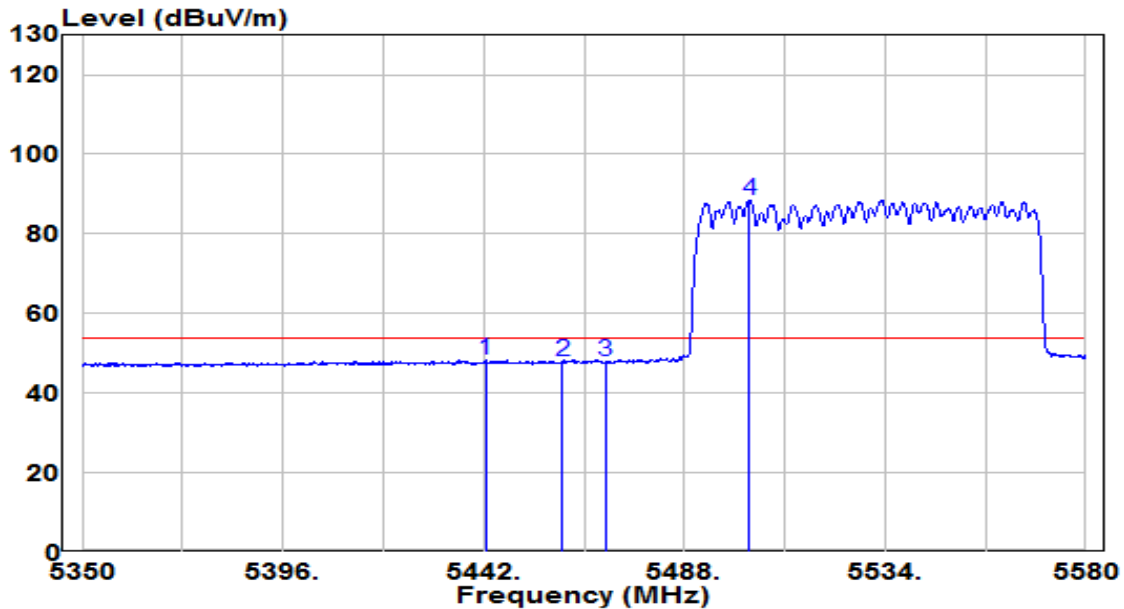


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5442.575	28.59	19.83	48.43	-5.57	54.00	Average
2	5460.000	28.05	19.84	47.90	-6.10	54.00	Average
3	5470.000	27.91	19.85	47.76	-6.24	54.00	Average
4	* 5502.950	68.55	19.89	88.43	N/A	N/A	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.4°C /40.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5775MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

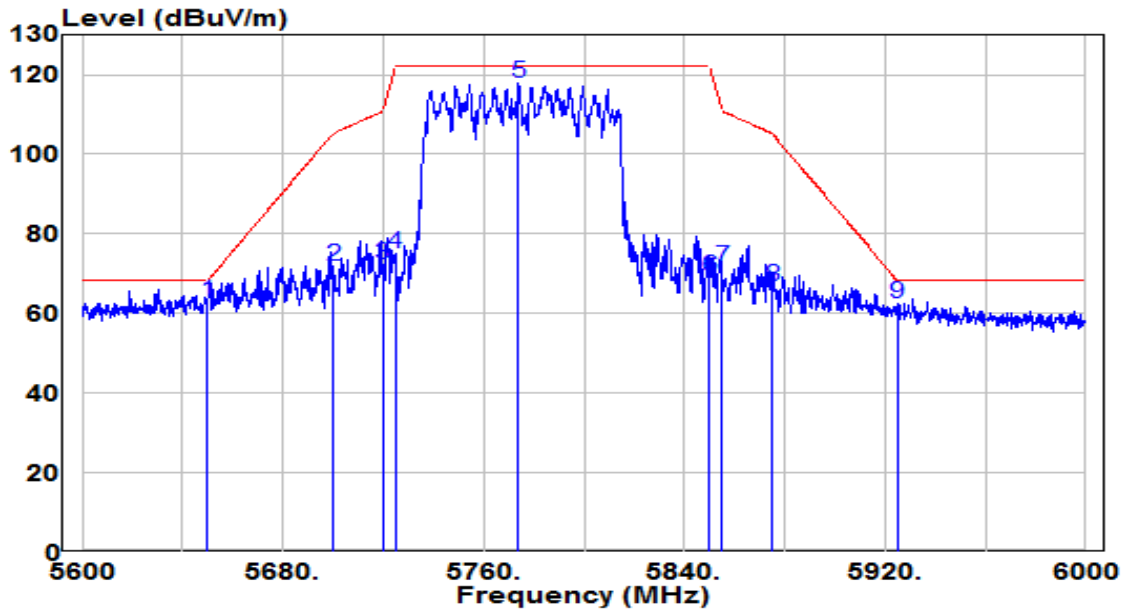


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5650.000	42.39	20.45	62.84	-5.36	68.20	Peak
2	5700.000	51.09	20.64	71.73	-33.47	105.20	Peak
3	5720.000	51.56	20.71	72.27	-38.53	110.80	Peak
4	5725.000	54.15	20.73	74.88	-47.32	122.20	Peak
5	* 5773.800	97.09	20.92	118.01	N/A	N/A	Peak
6	5850.000	47.88	21.21	69.09	-53.11	122.20	Peak
7	5855.000	50.36	21.23	71.59	-39.21	110.80	Peak
8	5875.000	45.65	21.31	66.96	-38.24	105.20	Peak
9	5925.000	41.14	21.50	62.64	-5.56	68.20	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.4°C /40.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5775MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

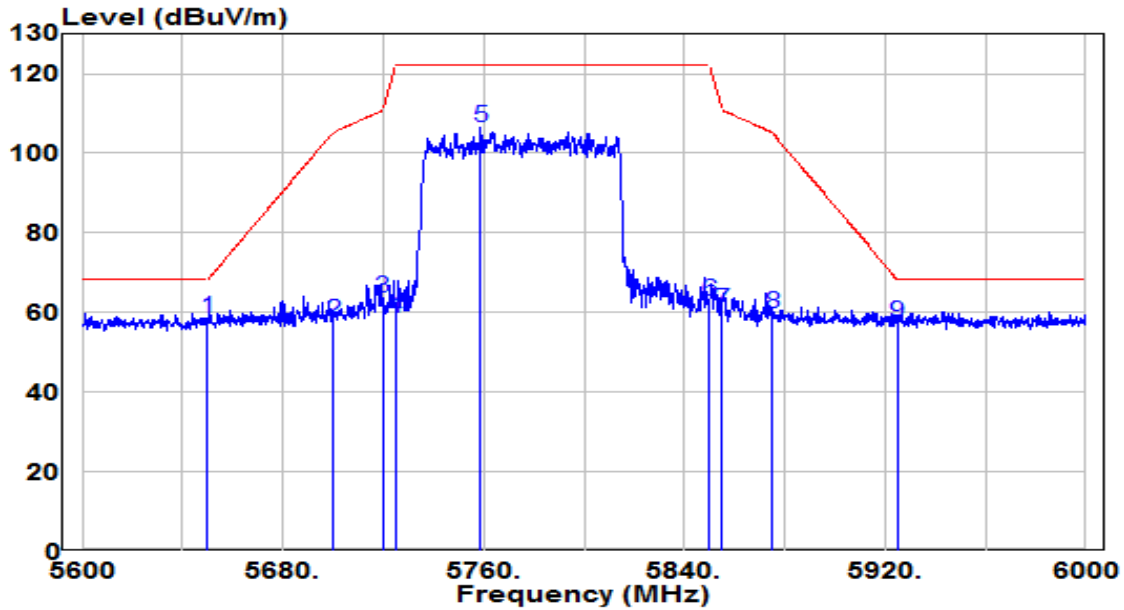


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5650.000	38.11	20.45	58.56	-9.64	68.20	Peak
2	5700.000	37.25	20.64	57.89	-47.31	105.20	Peak
3	5720.000	42.98	20.71	63.69	-47.11	110.80	Peak
4	5725.000	37.69	20.73	58.42	-63.78	122.20	Peak
5	5758.800	85.51	20.86	106.37	N/A	N/A	Peak
6	5850.000	41.64	21.21	62.85	-59.35	122.20	Peak
7	5855.000	39.19	21.23	60.42	-50.38	110.80	Peak
8	5875.000	38.21	21.31	59.52	-45.68	105.20	Peak
9	5925.000	35.78	21.50	57.28	-10.92	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.4°C /40.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE160 at channel 5570MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

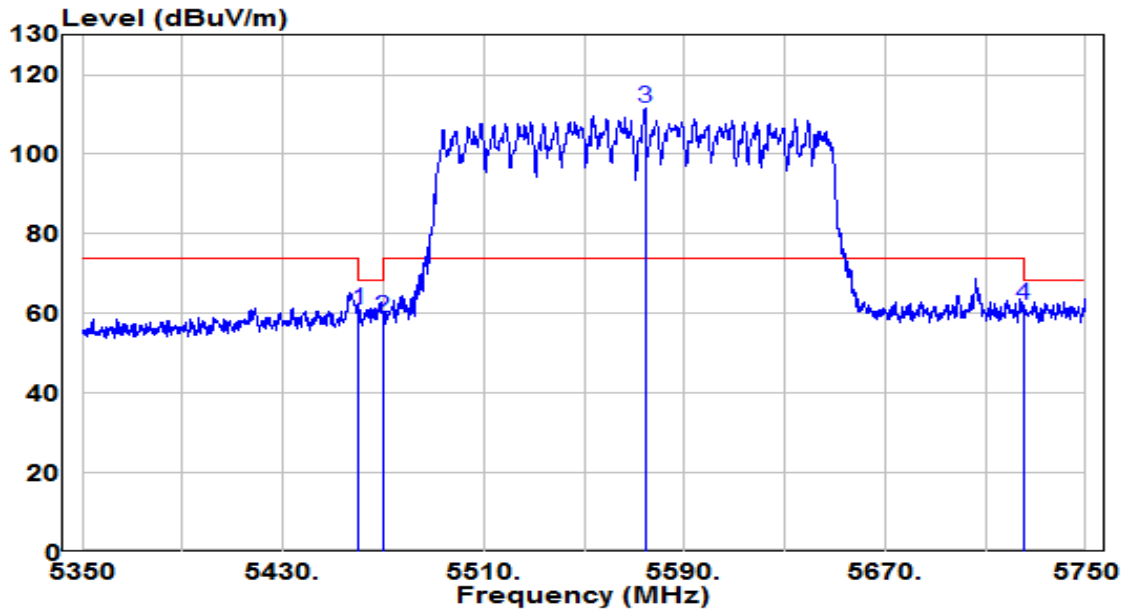


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	40.90	19.84	60.74	-7.46	68.20	Peak
2	5470.000	39.14	19.85	58.99	-9.21	68.20	Peak
3	* 5574.400	91.32	20.16	111.48	N/A	N/A	Peak
4	5725.000	41.52	20.73	62.26	-5.94	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.4°C /40.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE160 at channel 5570MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

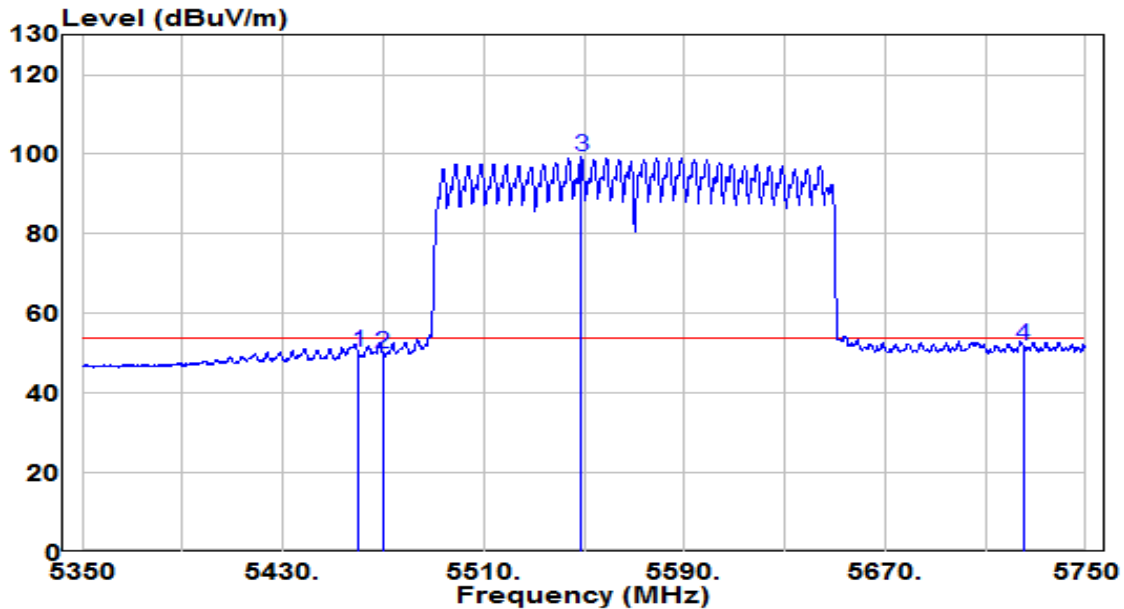


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	30.49	19.84	50.33	-3.67	54.00	Average
2	5470.000	30.15	19.85	50.00	-4.00	54.00	Average
3	* 5549.000	79.26	20.06	99.31	N/A	N/A	Average
4	5725.000	31.25	20.73	51.99	-2.01	54.00	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.4°C /40.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE160 at channel 5570MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

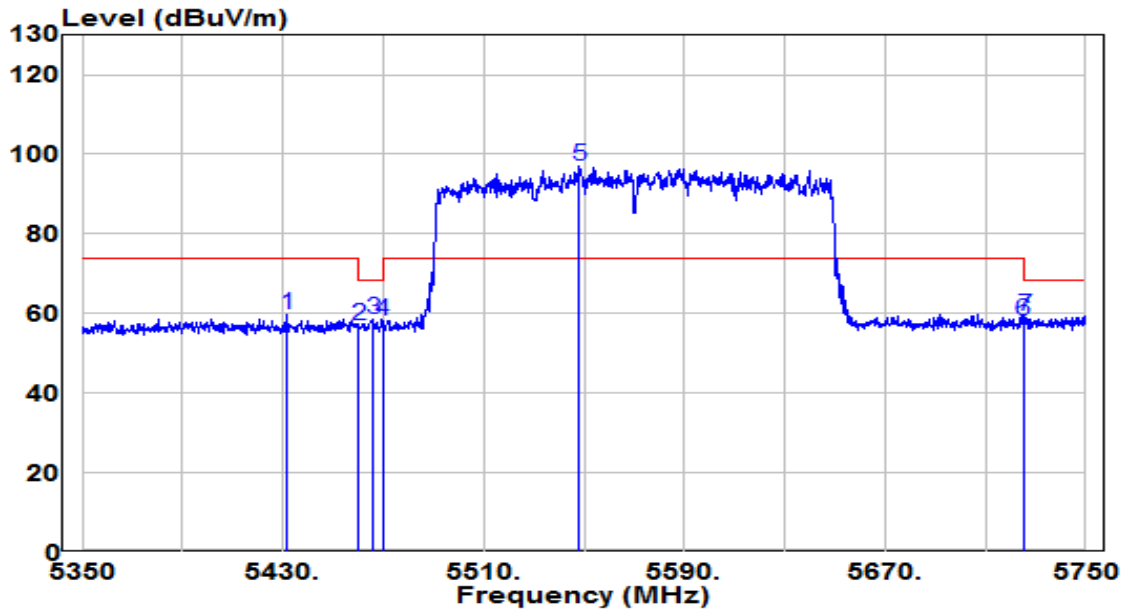


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5431.800	39.97	19.83	59.80	-14.20	74.00	Peak
2	5460.000	36.94	19.84	56.78	-11.42	68.20	Peak
3	5466.200	38.57	19.85	58.42	-9.78	68.20	Peak
4	5470.000	38.18	19.85	58.03	-10.17	68.20	Peak
5	* 5548.200	76.83	20.06	96.89	N/A	N/A	Peak
6	5725.000	37.60	20.73	58.34	-9.86	68.20	Peak
7	5725.400	38.67	20.74	59.41	-8.79	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.4°C /40.5%

Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE160 at channel 5570MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

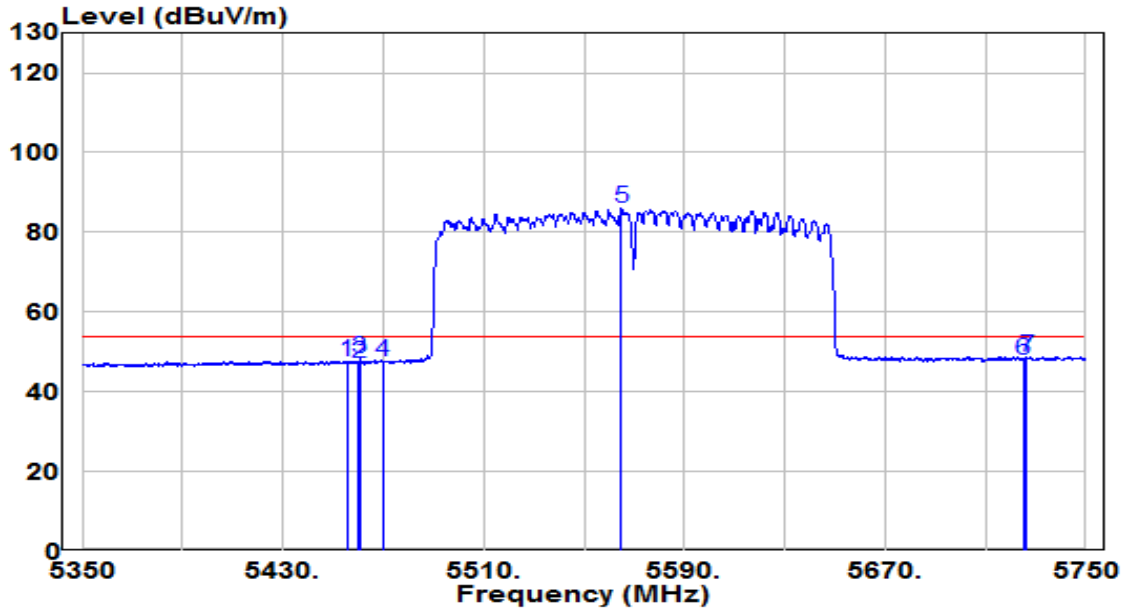


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5455.400	27.79	19.84	47.63	-6.37	54.00	Average
2	5460.000	27.34	19.84	47.18	-6.82	54.00	Average
3	5460.800	28.35	19.84	48.20	-5.80	54.00	Average
4	5470.000	27.67	19.85	47.52	-6.48	54.00	Average
5 *	5564.800	65.91	20.12	86.03	N/A	N/A	Average
6	5725.000	27.26	20.73	47.99	-6.01	54.00	Average
7	5726.400	27.97	20.74	48.71	-5.29	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5500MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

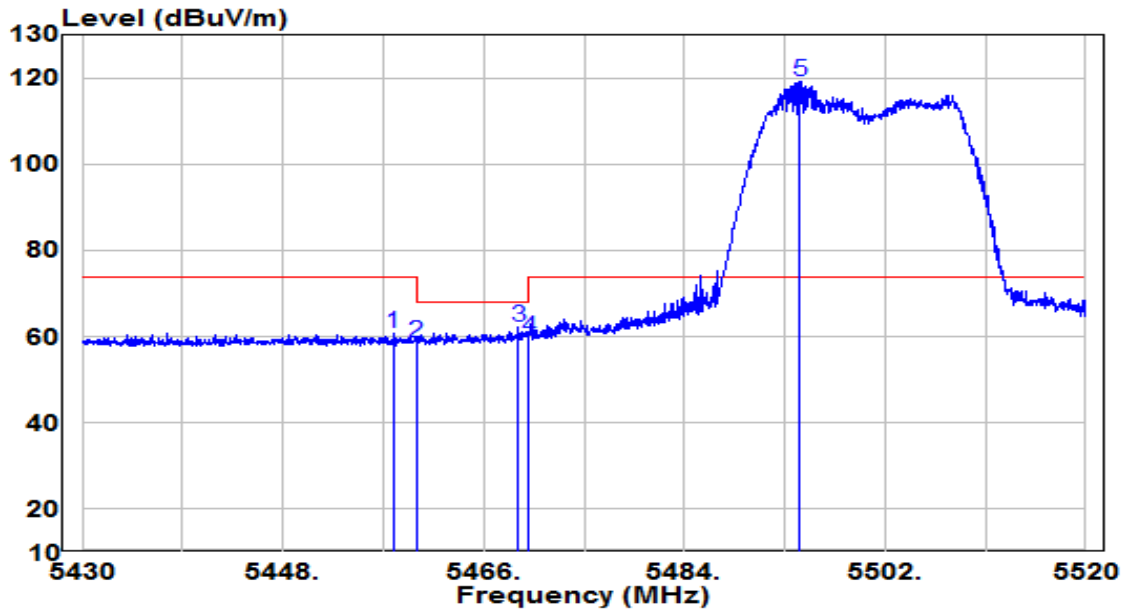


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5457.900	41.02	19.84	60.86	-13.14	74.00	Peak
2	5460.000	38.92	19.84	58.77	-9.43	68.20	Peak
3	5469.105	42.44	19.85	62.29	-5.91	68.20	Peak
4	5470.000	40.00	19.85	59.85	-8.35	68.20	Peak
5	* 5494.350	99.23	19.87	119.11	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5500MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

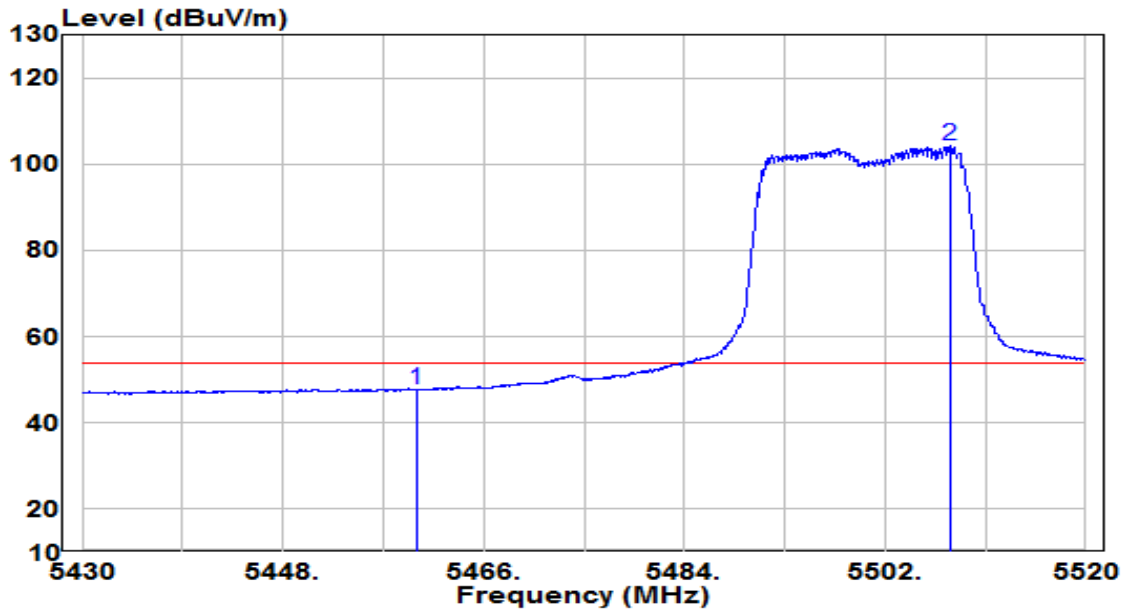


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	27.96	19.84	47.80	-6.20	54.00	Average
2	* 5507.850	84.28	19.90	104.18	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5500MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

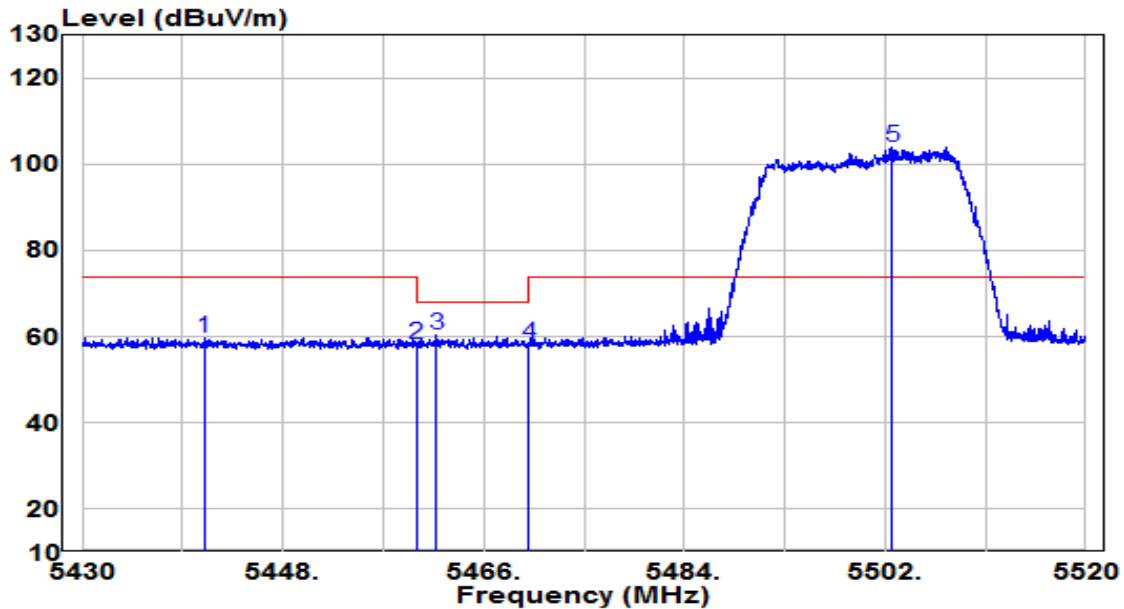


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5440.935	39.94	19.83	59.77	-14.23	74.00	Peak
2	5460.000	38.51	19.84	58.36	-9.84	68.20	Peak
3	5461.770	40.49	19.85	60.34	-7.86	68.20	Peak
4	5470.000	38.25	19.85	58.10	-10.10	68.20	Peak
5	* 5502.675	84.19	19.89	104.07	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5500MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

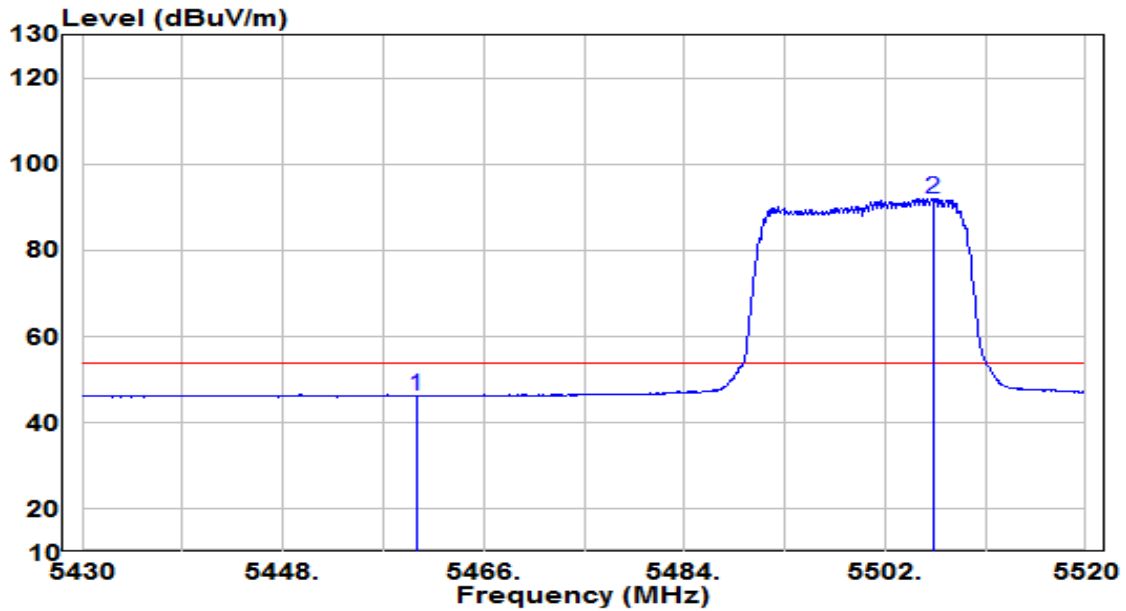


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	26.40	19.84	46.24	-7.76	54.00	Average
2	* 5506.275	72.11	19.89	92.01	N/A	N/A	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5700MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

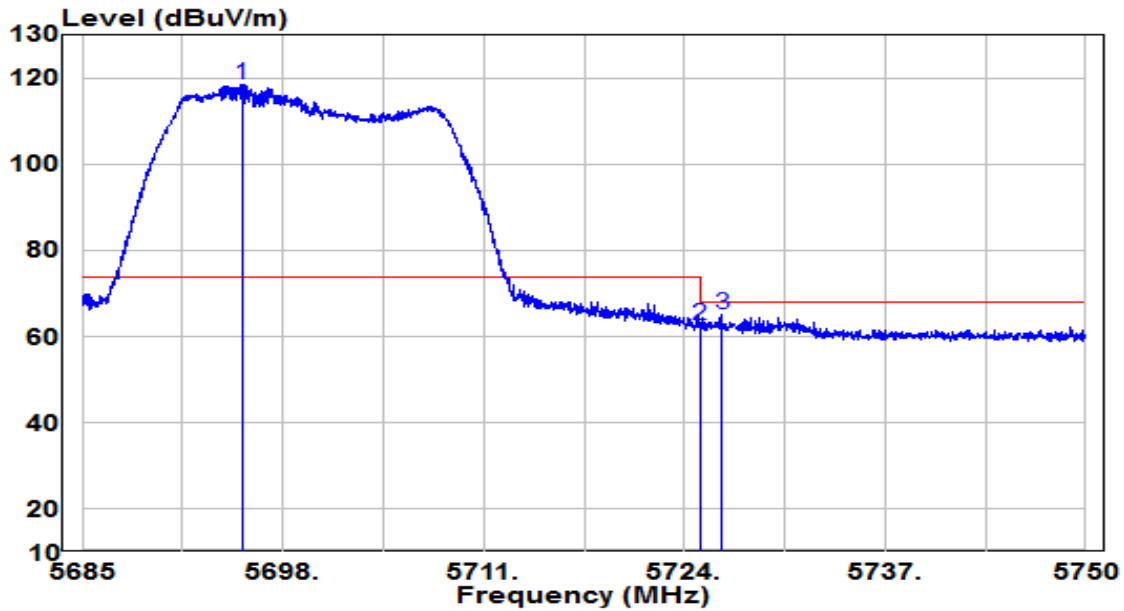


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5695.335	97.85	20.62	118.47	N/A	N/A	Peak
2	5725.000	41.89	20.73	62.62	-5.58	68.20	Peak
3	5726.438	44.39	20.74	65.13	-3.07	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5700MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

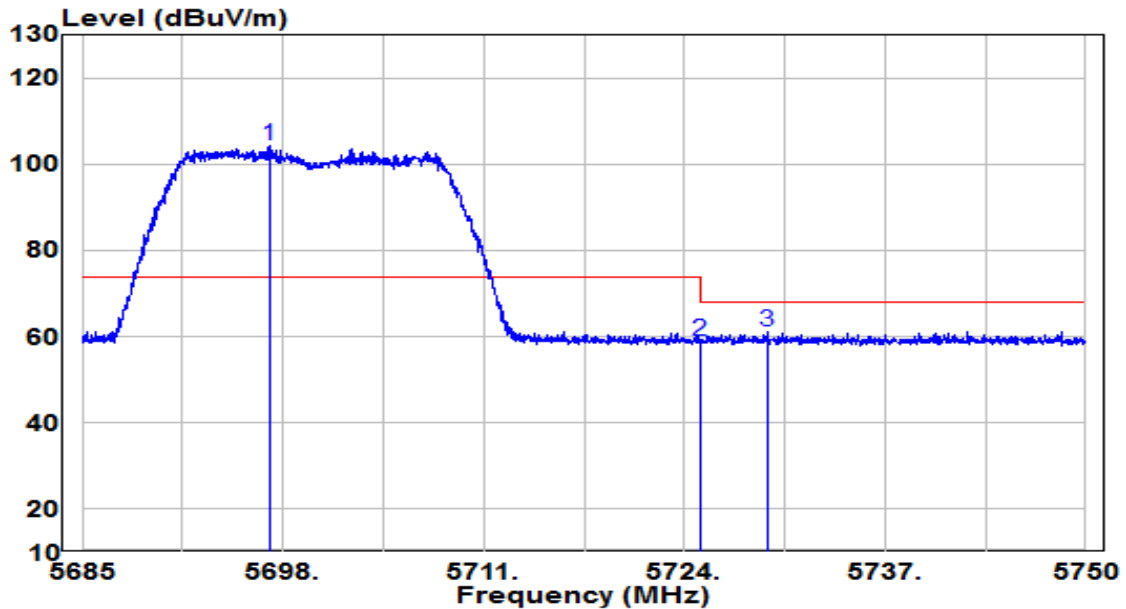


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5697.123	83.76	20.63	104.39	N/A	N/A	Peak
2	5725.000	38.08	20.73	58.81	-9.39	68.20	Peak
3	5729.362	40.40	20.75	61.15	-7.05	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5510MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

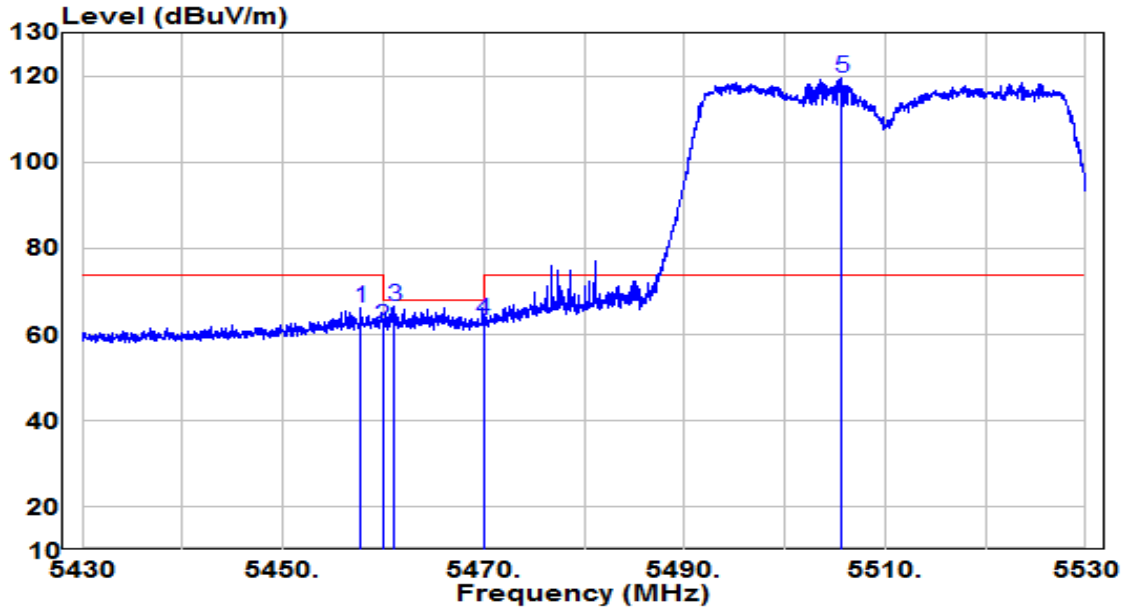


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5457.800	46.30	19.84	66.14	-7.86	74.00	Peak
2	5460.000	42.01	19.84	61.85	-6.35	68.20	Peak
3	5461.150	46.74	19.84	66.58	-1.62	68.20	Peak
4	5470.000	43.54	19.85	63.39	-4.81	68.20	Peak
5	* 5505.700	99.56	19.89	119.45	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5510MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

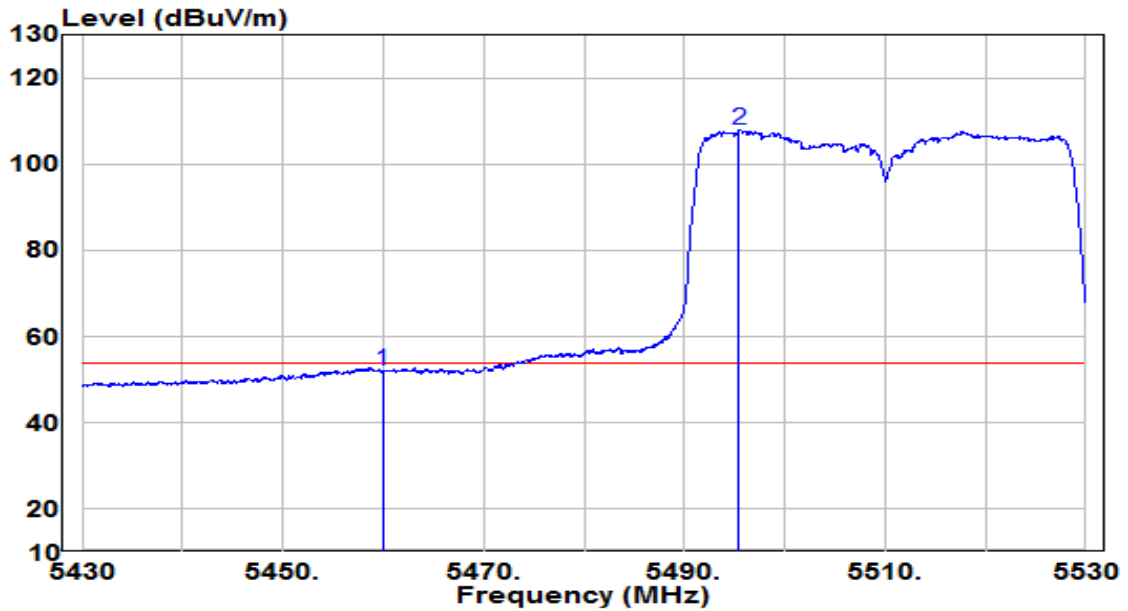


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	32.06	19.84	51.90	-2.10	54.00	Average
2	* 5495.450	88.15	19.87	108.02	N/A	N/A	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preampifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5510MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

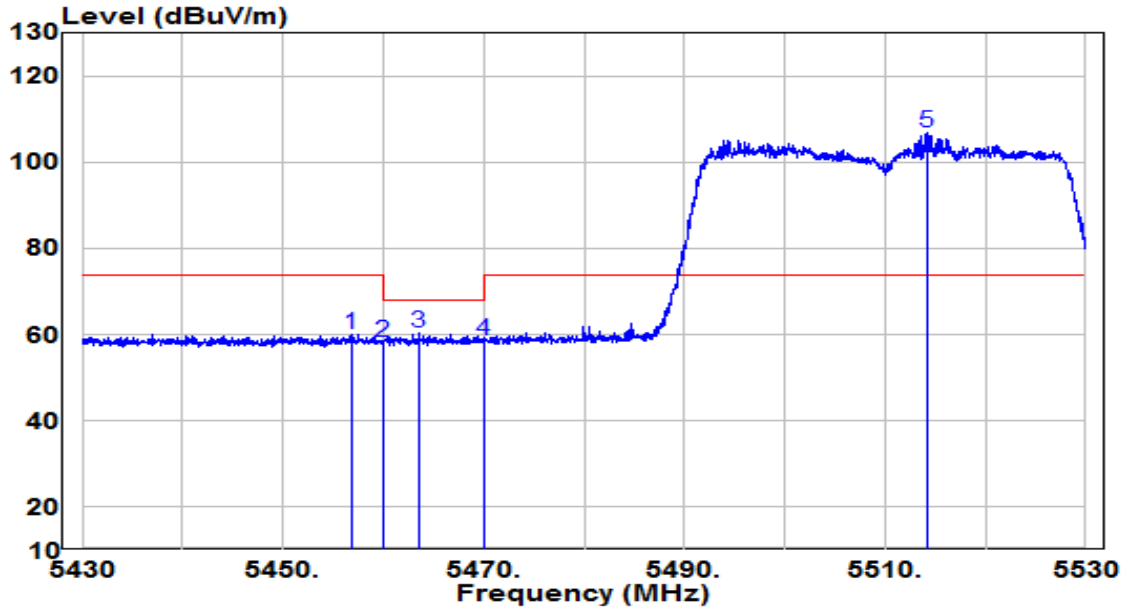


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5456.850	40.22	19.84	60.06	-13.94	74.00	Peak
2	5460.000	38.37	19.84	58.21	-9.99	68.20	Peak
3	5463.550	40.60	19.85	60.44	-7.76	68.20	Peak
4	5470.000	38.73	19.85	58.58	-9.62	68.20	Peak
5	* 5514.100	86.78	19.92	106.71	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5510MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

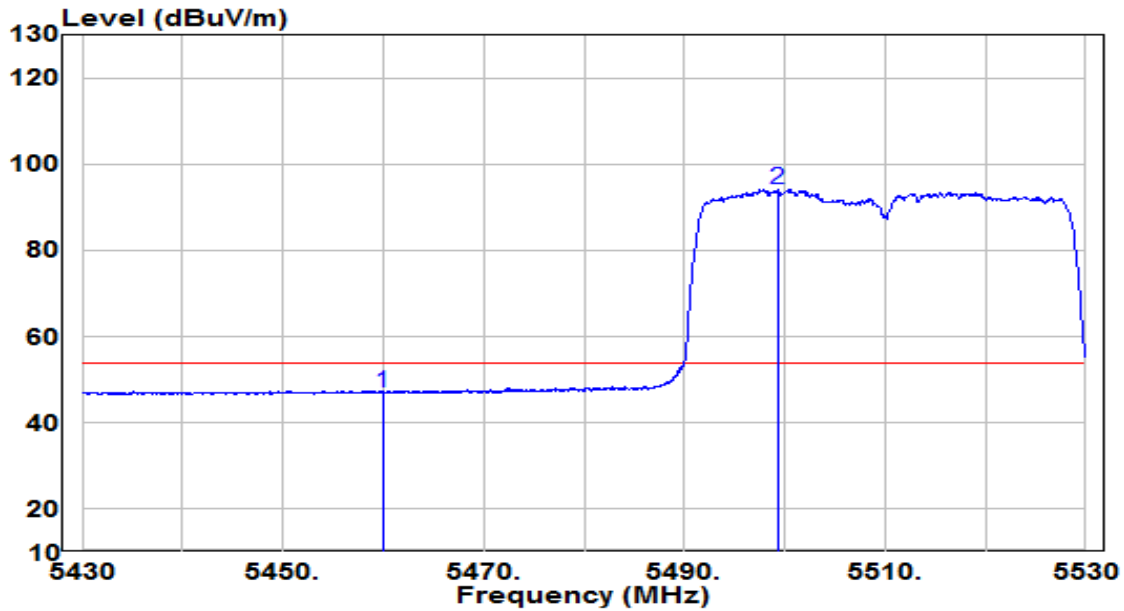


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	27.25	19.84	47.09	-6.91	54.00	Average
2	* 5499.250	74.31	19.88	94.19	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5670MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

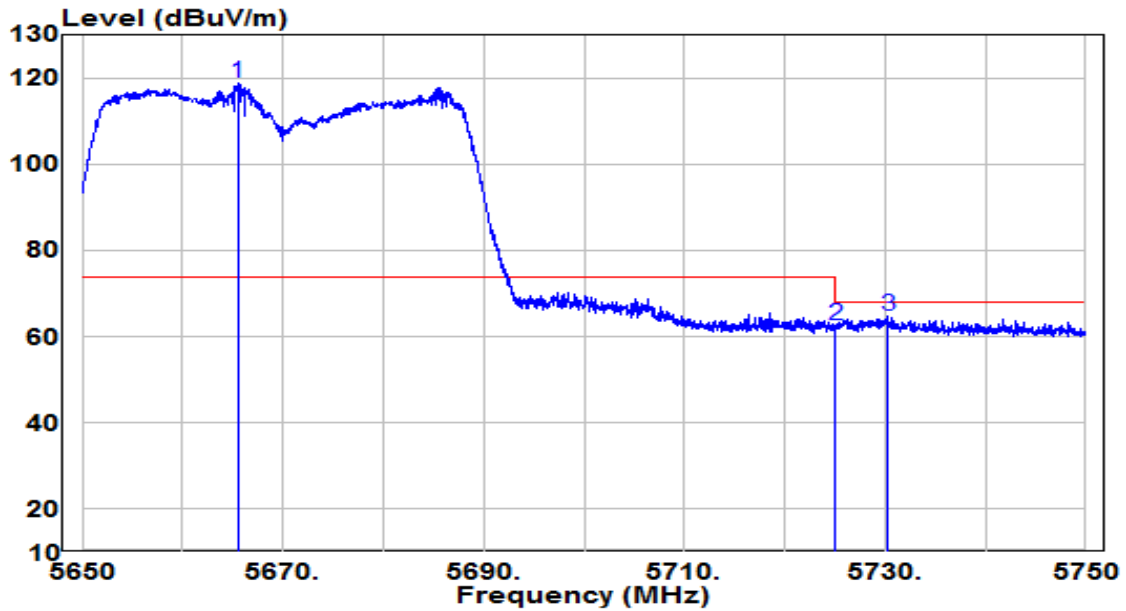


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5665.500	98.15	20.51	118.66	N/A	N/A	Peak
2	5725.000	41.96	20.73	62.69	-5.51	68.20	Peak
3	5730.300	44.10	20.75	64.85	-3.35	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5670MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

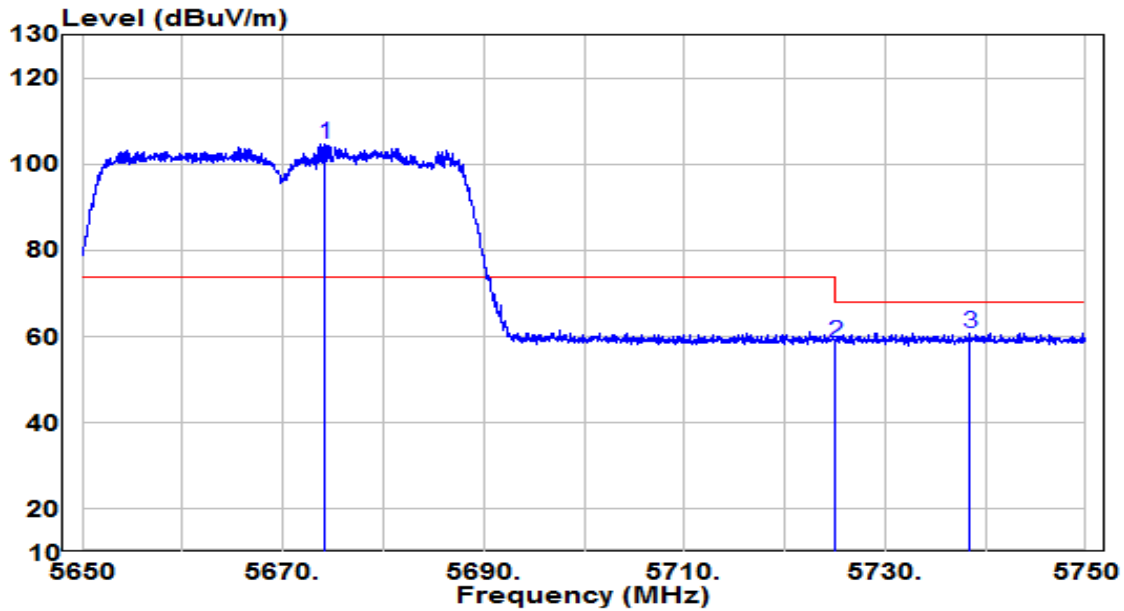


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5674.150	84.24	20.54	104.78	N/A	N/A	Peak
2	5725.000	37.93	20.73	58.67	-9.53	68.20	Peak
3	5738.450	40.12	20.79	60.90	-7.30	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5530MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

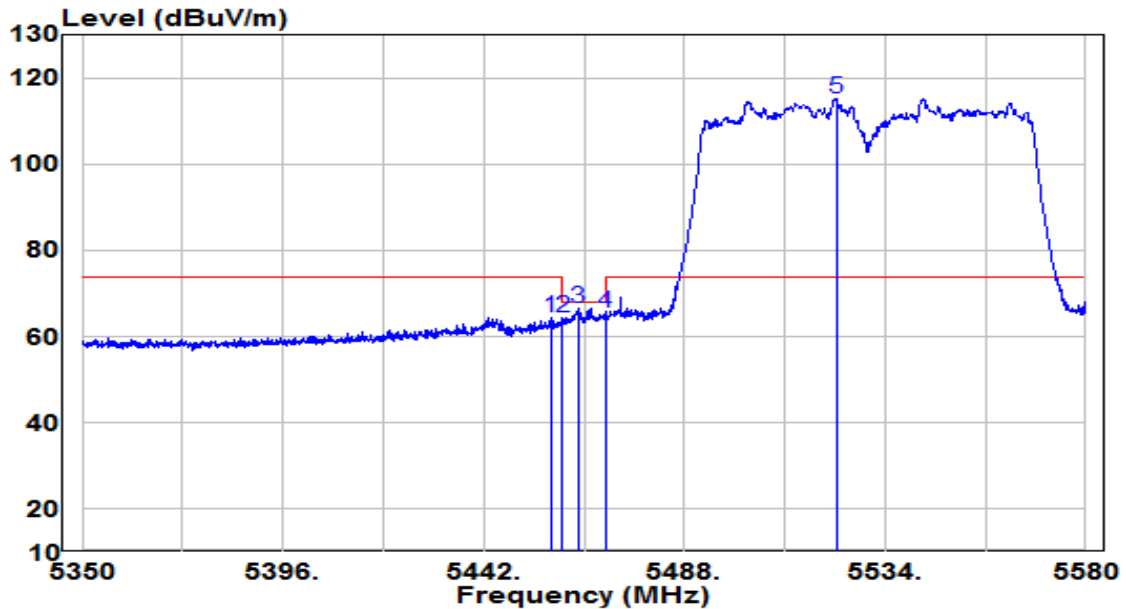


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5457.295	44.64	19.84	64.48	-9.52	74.00	Peak
2	5460.000	44.64	19.84	64.48	-3.72	68.20	Peak
3	5463.620	46.81	19.85	66.66	-1.54	68.20	Peak
4	5470.000	45.57	19.85	65.42	-2.78	68.20	Peak
5	* 5522.845	95.28	19.96	115.24	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5530MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

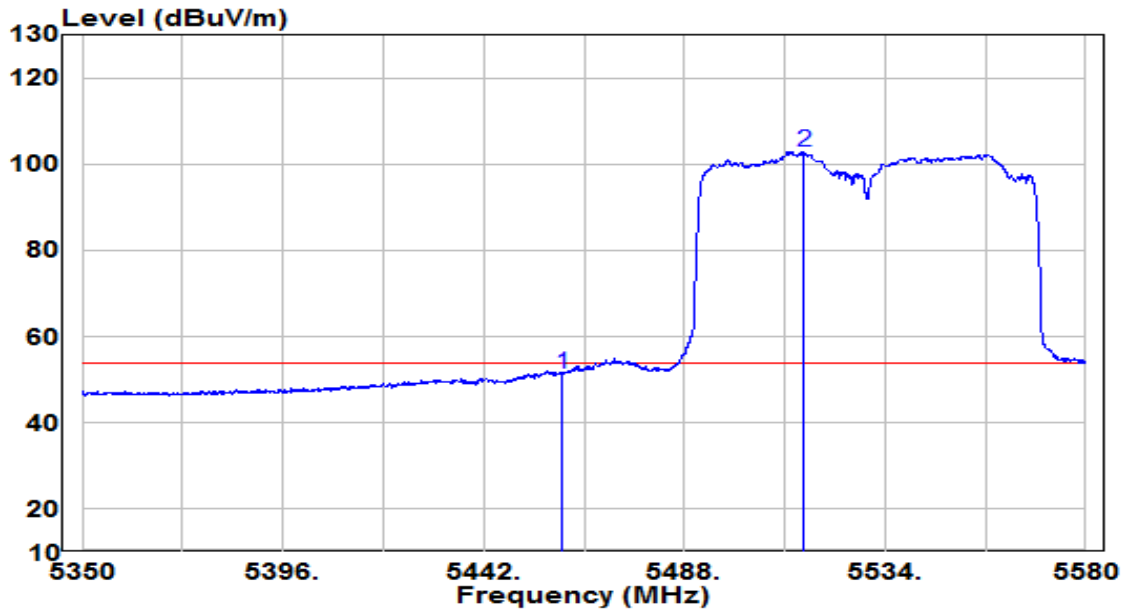


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	31.63	19.84	51.47	-2.53	54.00	Average
2	* 5515.370	83.04	19.93	102.97	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5530MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

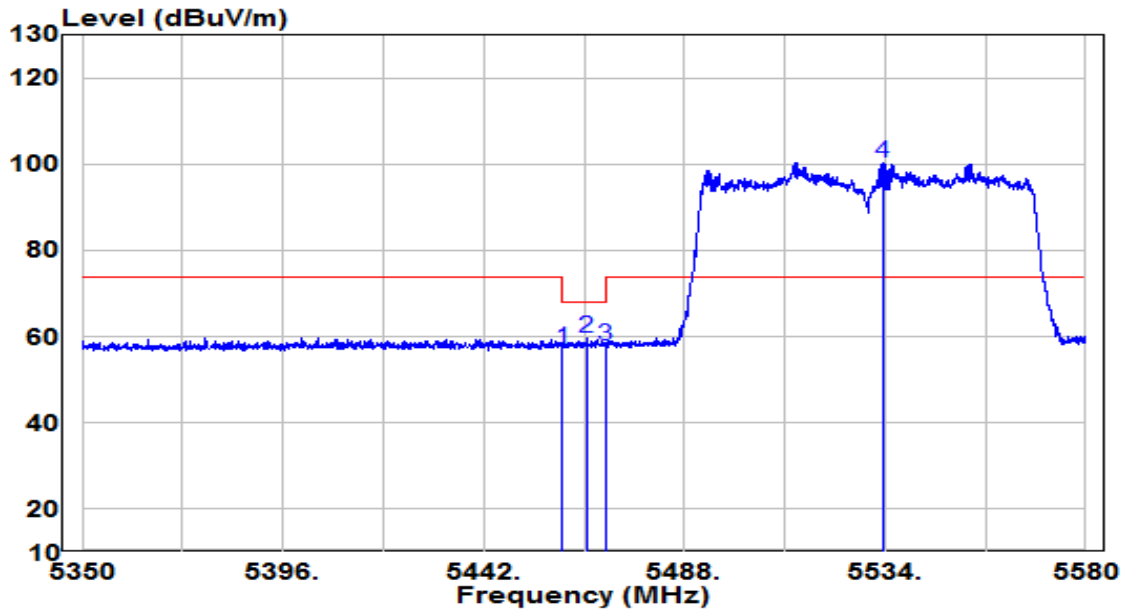


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	37.39	19.84	57.23	-10.97	68.20	Peak
2	5465.575	39.72	19.85	59.57	-8.63	68.20	Peak
3	5470.000	38.19	19.85	58.04	-10.16	68.20	Peak
4	* 5533.425	80.41	20.00	100.40	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5530MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

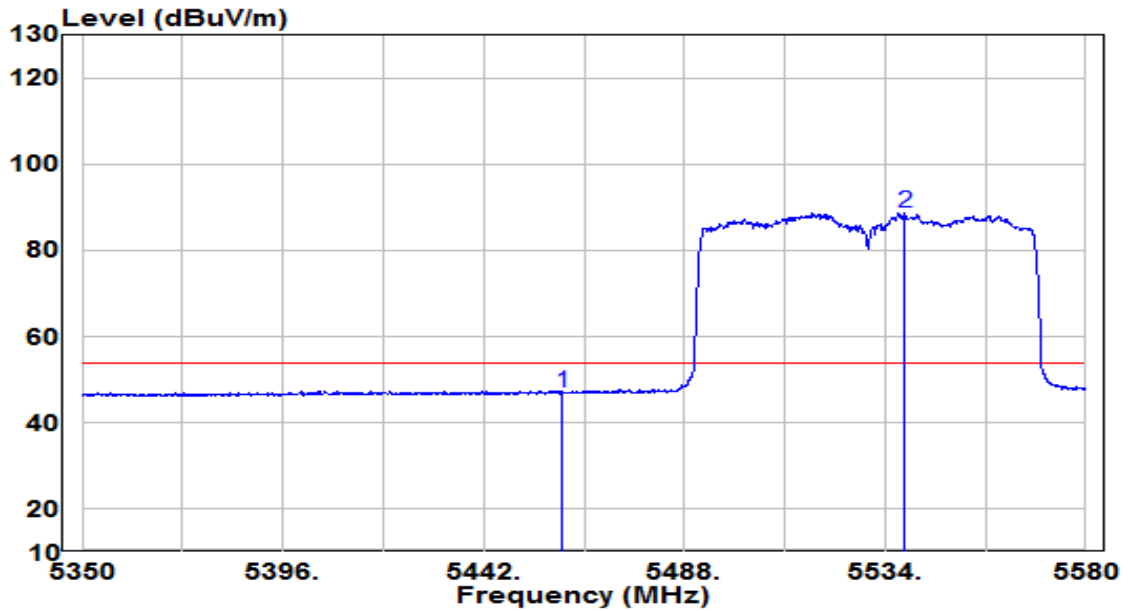


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	27.26	19.84	47.10	-6.90	54.00	Average
2	* 5538.370	68.64	20.02	88.65	N/A	N/A	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5610MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

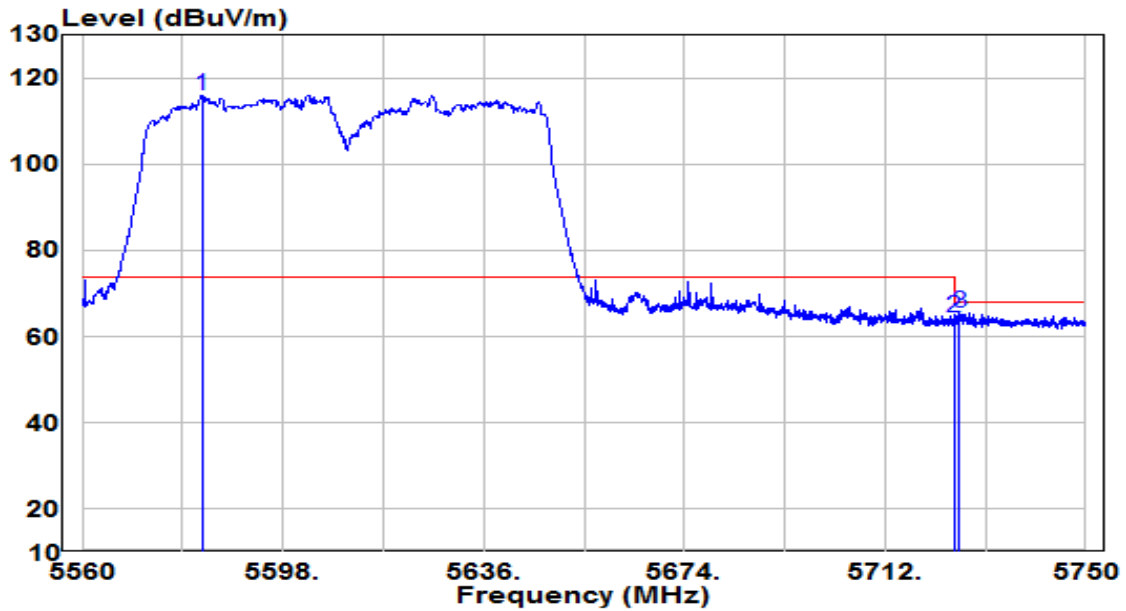


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5582.800	95.85	20.19	116.04	N/A	N/A	Peak
2	5725.000	43.73	20.73	64.46	-3.74	68.20	Peak
3	5726.060	44.81	20.74	65.54	-2.66	68.20	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5610MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

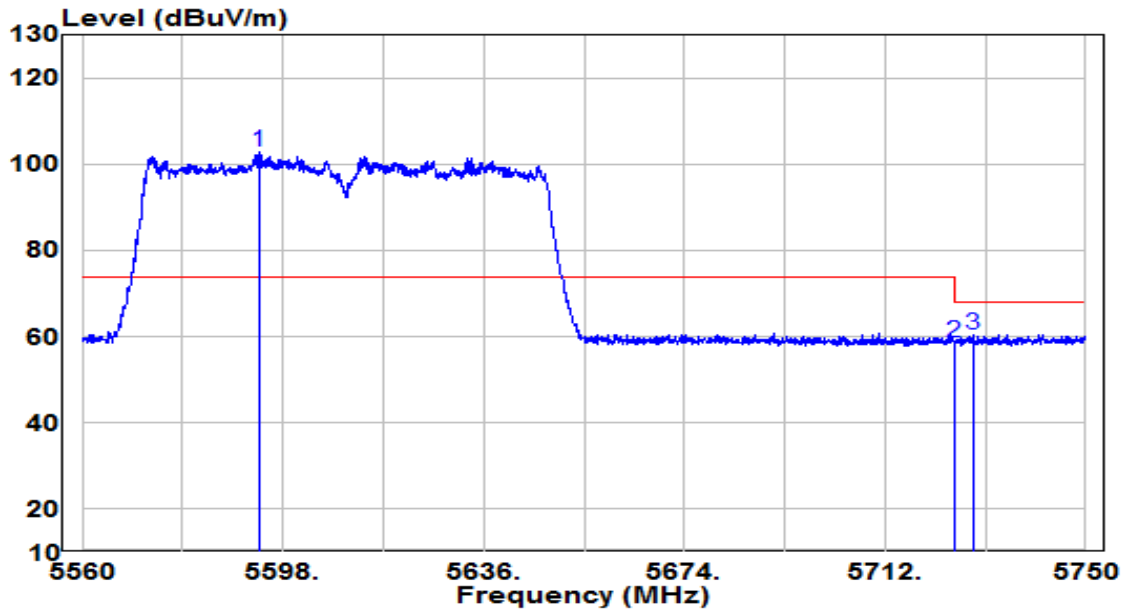


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5593.440	82.53	20.23	102.75	N/A	N/A	Peak
2	5725.000	38.03	20.73	58.77	-9.43	68.20	Peak
3	5728.625	39.76	20.75	60.50	-7.70	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT160 at channel 5570MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

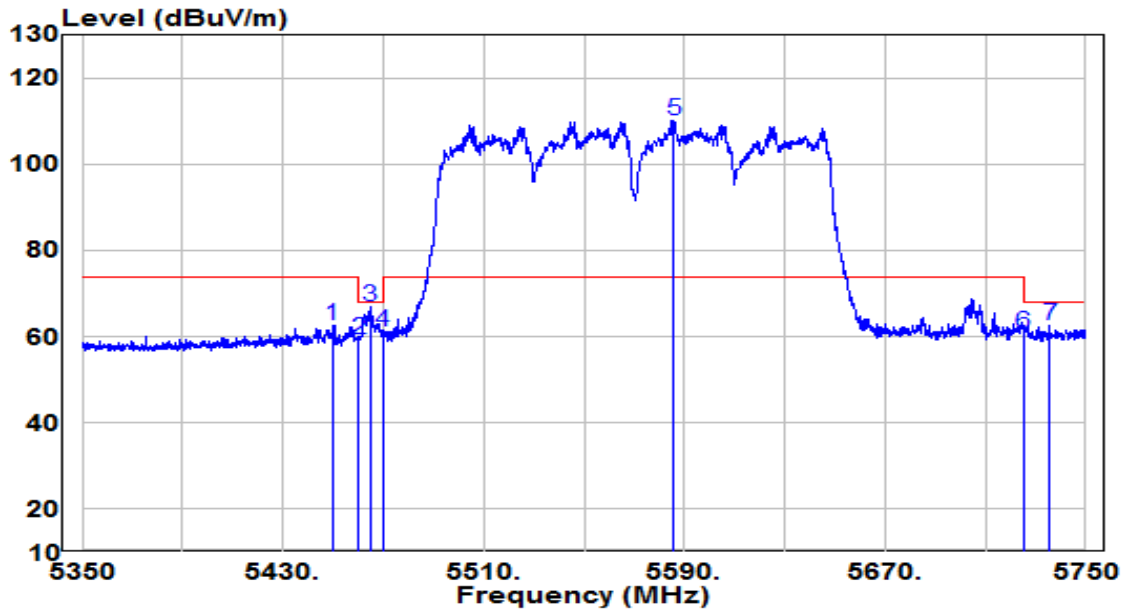


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5449.800	42.84	19.84	62.68	-11.32	74.00	Peak
2	5460.000	39.41	19.84	59.25	-8.95	68.20	Peak
3	5464.800	47.21	19.85	67.06	-1.14	68.20	Peak
4	5470.000	41.27	19.85	61.12	-7.08	68.20	Peak
5	* 5585.800	89.81	20.20	110.01	N/A	N/A	Peak
6	5725.000	40.12	20.73	60.85	-7.35	68.20	Peak
7	5735.600	41.80	20.77	62.57	-5.63	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT160 at channel 5570MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

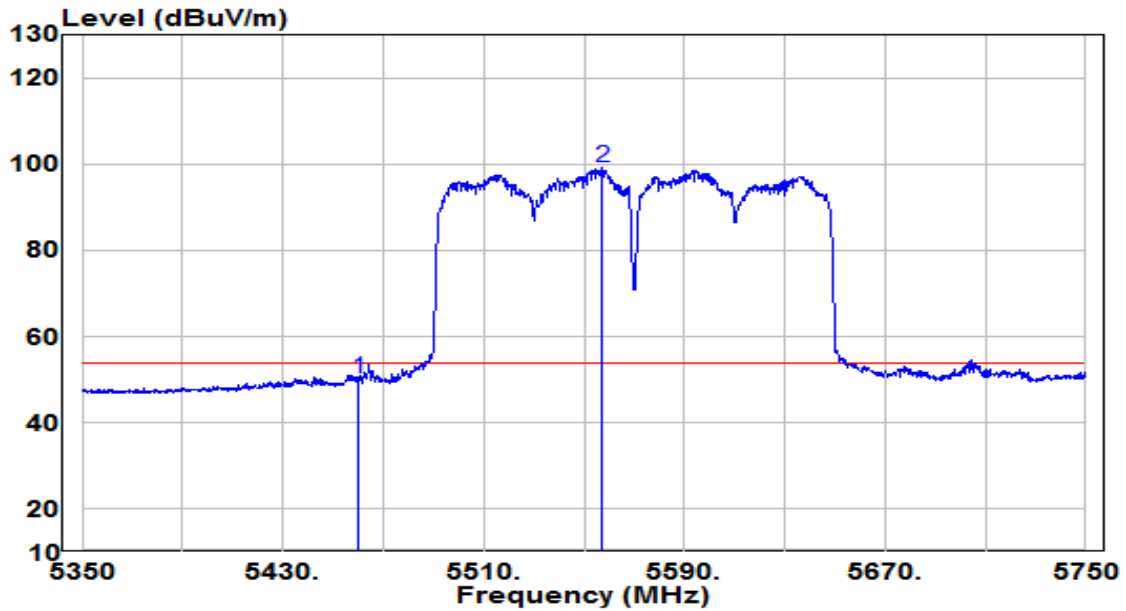


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	30.24	19.84	50.08	-3.92	54.00	Average
2	* 5557.200	79.15	20.09	99.24	N/A	N/A	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT160 at channel 5570MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

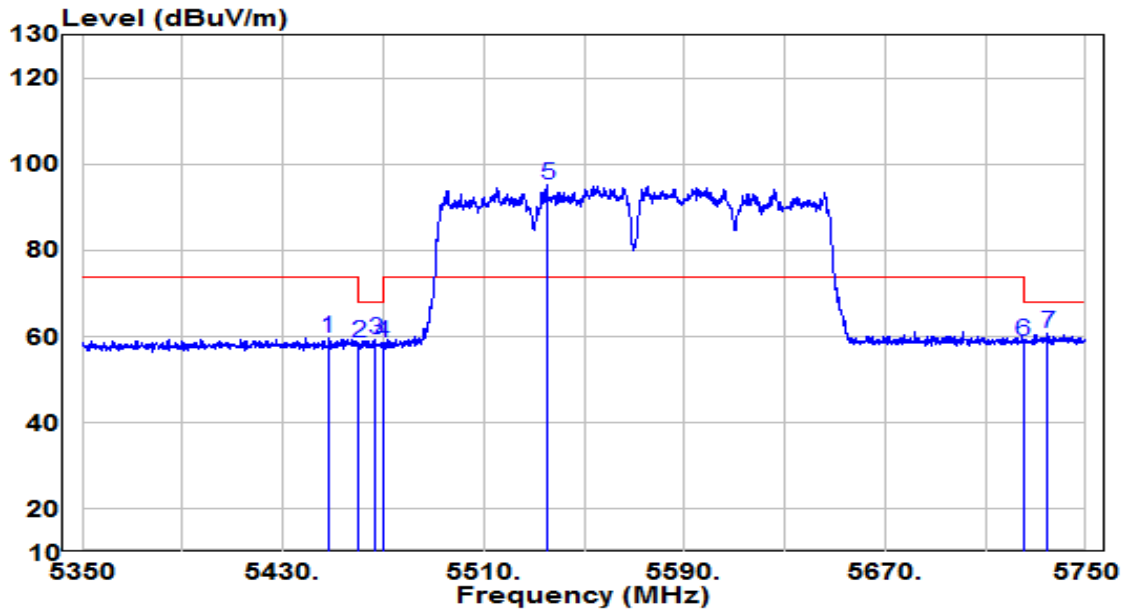


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5448.200	39.74	19.84	59.57	-14.43	74.00	Peak
2	5460.000	38.76	19.84	58.61	-9.59	68.20	Peak
3	5466.800	39.52	19.85	59.37	-8.83	68.20	Peak
4	5470.000	38.89	19.85	58.74	-9.46	68.20	Peak
5	* 5535.400	75.37	20.01	95.37	N/A	N/A	Peak
6	5725.000	38.31	20.73	59.04	-9.16	68.20	Peak
7	5734.800	39.85	20.77	60.62	-7.58	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT160 at channel 5570MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

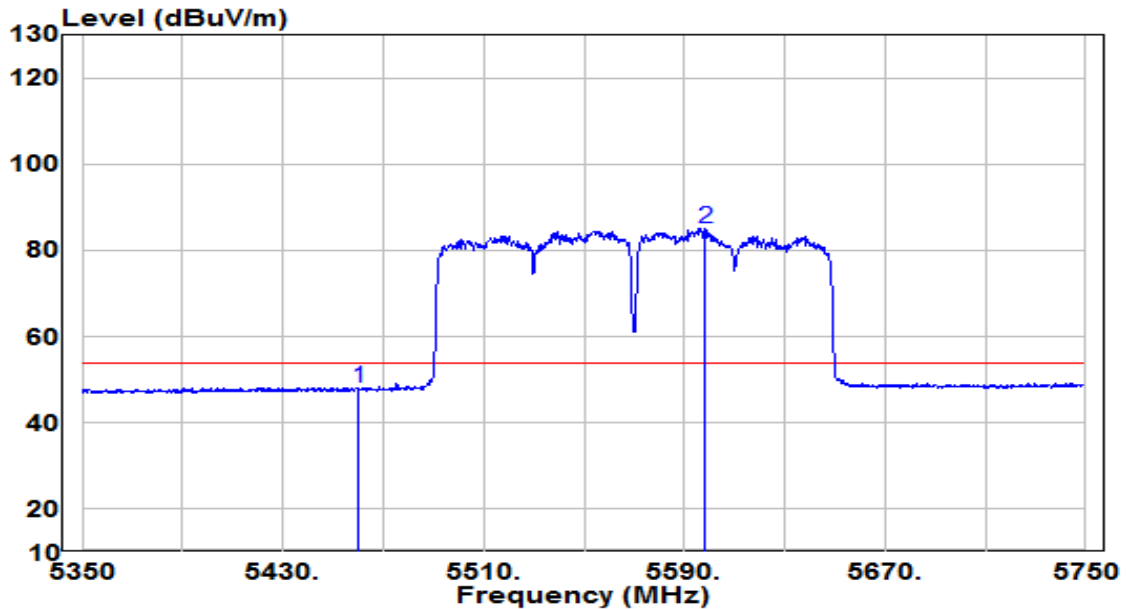


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	28.39	19.84	48.23	-5.77	54.00	Average
2	* 5598.400	64.77	20.25	85.02	N/A	N/A	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 5500MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

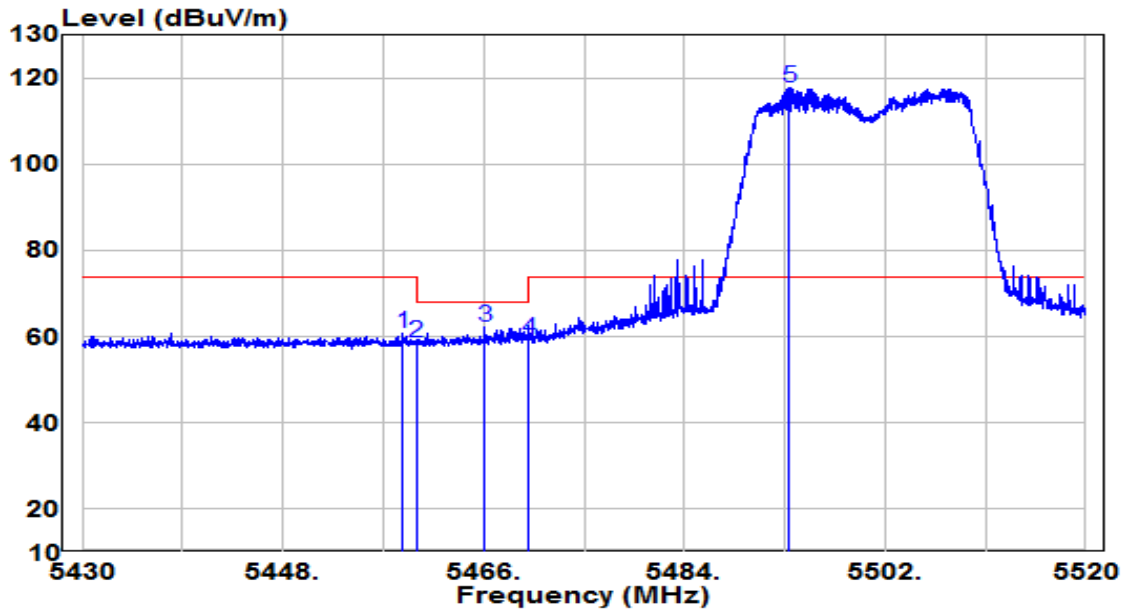


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.755	40.90	19.84	60.74	-13.26	74.00	Peak
2	5460.000	38.75	19.84	58.59	-9.61	68.20	Peak
3	5466.135	42.25	19.85	62.10	-6.10	68.20	Peak
4	5470.000	39.55	19.85	59.40	-8.80	68.20	Peak
5	* 5493.360	97.81	19.87	117.68	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 5500MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

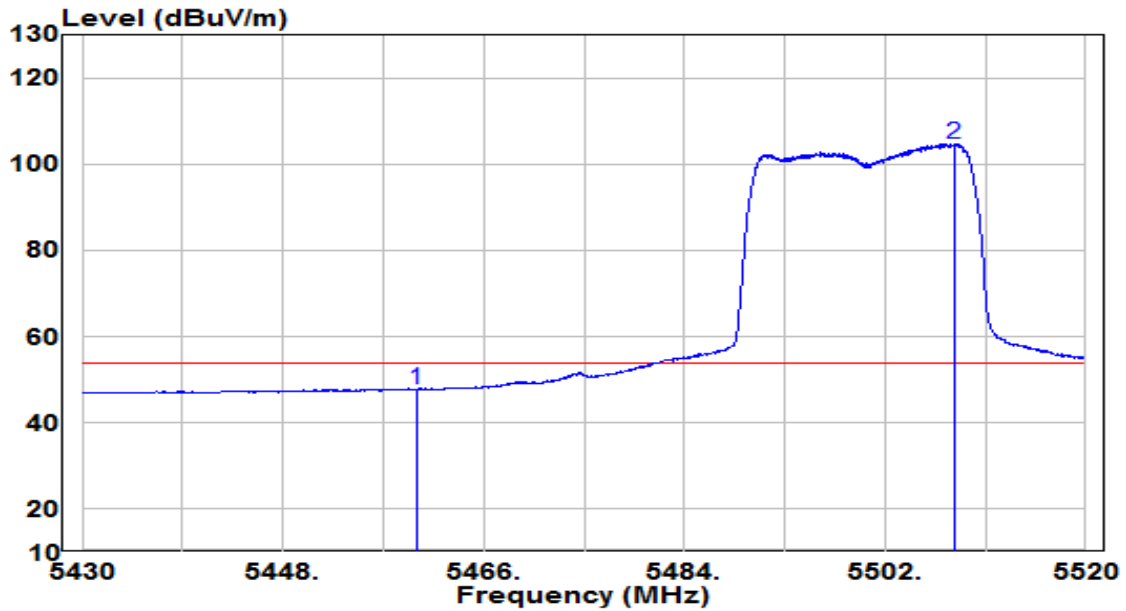


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	27.91	19.84	47.76	-6.24	54.00	Average
2	* 5508.210	84.77	19.90	104.67	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 5500MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

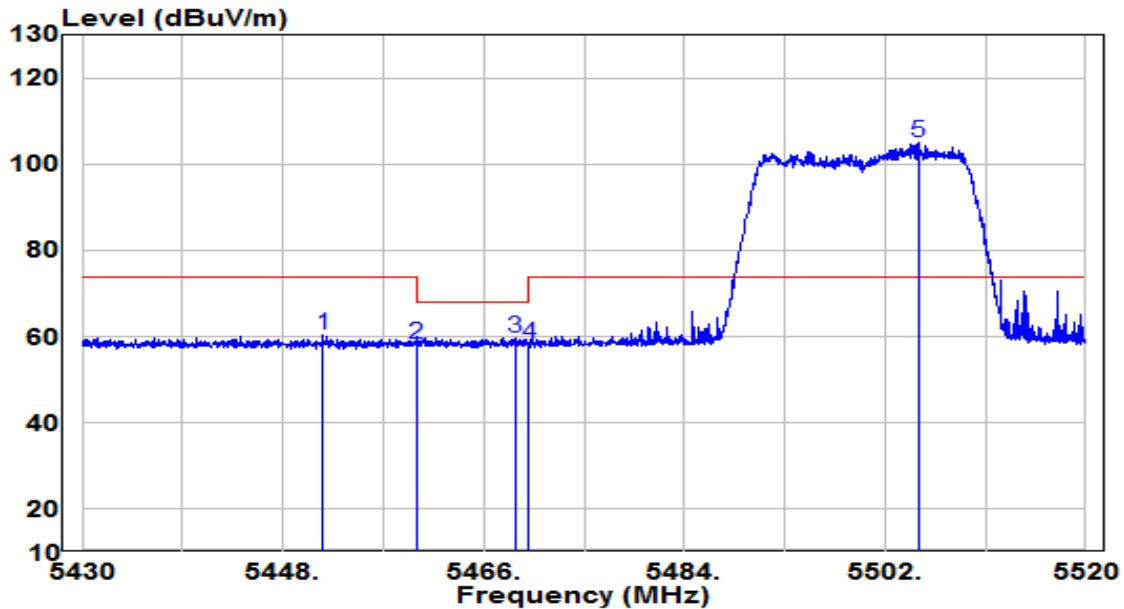


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5451.600	40.59	19.84	60.43	-13.57	74.00	Peak
2	5460.000	38.44	19.84	58.28	-9.92	68.20	Peak
3	5468.835	39.97	19.85	59.82	-8.38	68.20	Peak
4	5470.000	38.29	19.85	58.14	-10.06	68.20	Peak
5	* 5505.015	84.99	19.89	104.88	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 5500MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

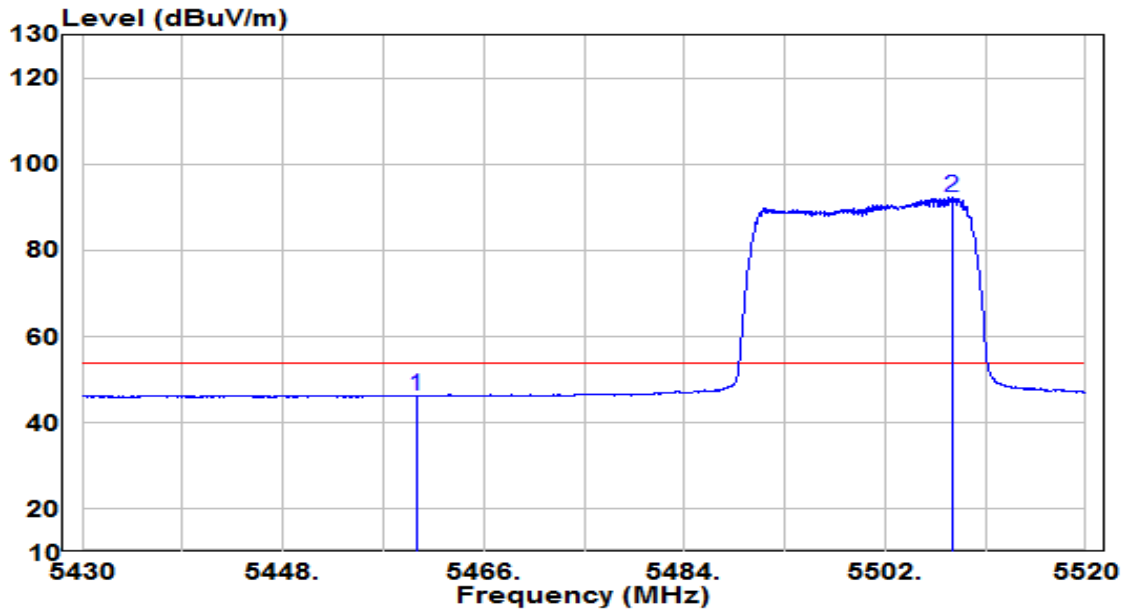


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	26.38	19.84	46.23	-7.77	54.00	Average
2	* 5507.985	72.31	19.90	92.21	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 5700MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

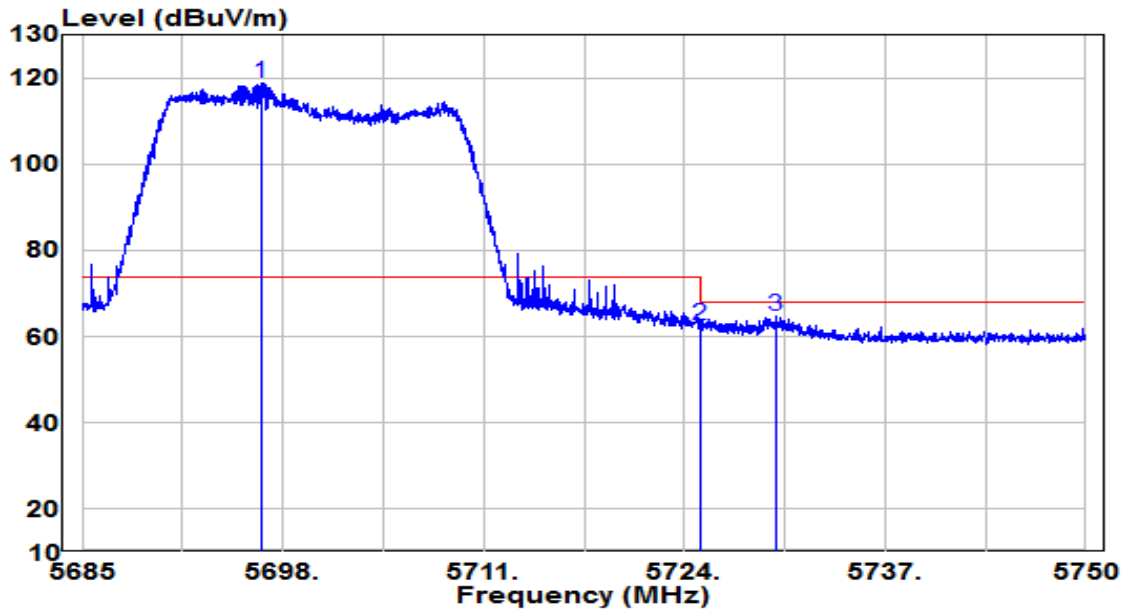


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5696.603	98.16	20.62	118.78	N/A	N/A	Peak
2	5725.000	41.85	20.73	62.58	-5.62	68.20	Peak
3	5729.915	43.98	20.75	64.73	-3.47	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at channel 5700MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

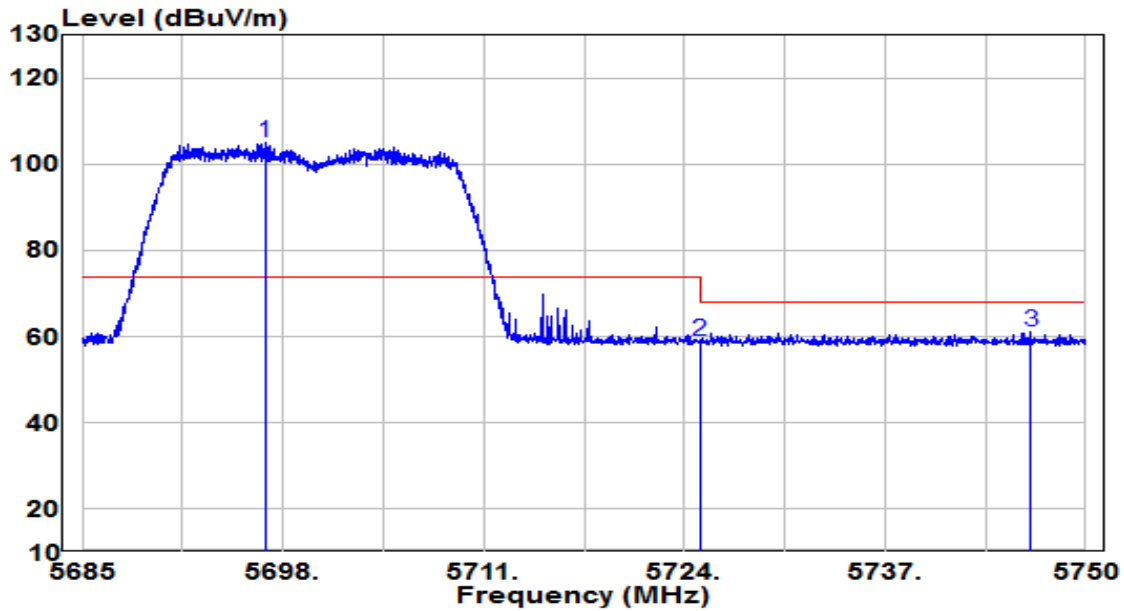


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5696.862	84.53	20.63	105.15	N/A	N/A	Peak
2	5725.000	38.29	20.73	59.02	-9.18	68.20	Peak
3	5746.458	40.36	20.82	61.17	-7.03	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5510MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

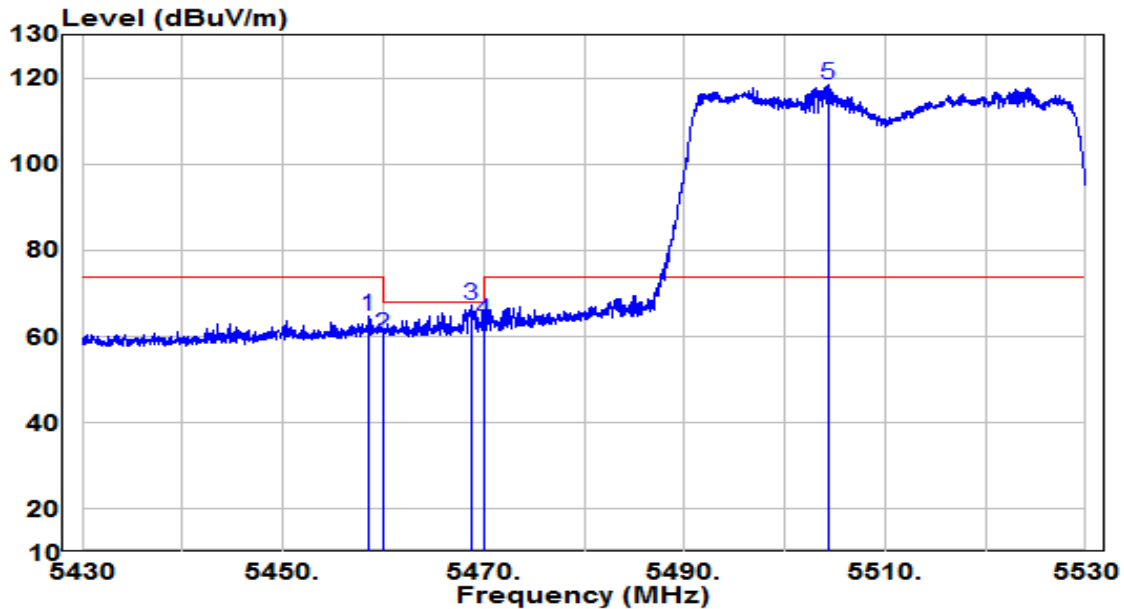


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.500	44.94	19.84	64.78	-9.22	74.00	Peak
2	5460.000	40.46	19.84	60.30	-7.90	68.20	Peak
3	5468.700	47.33	19.85	67.18	-1.02	68.20	Peak
4	5470.000	43.64	19.85	63.49	-4.71	68.20	Peak
5	* 5504.350	98.48	19.89	118.37	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5510MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

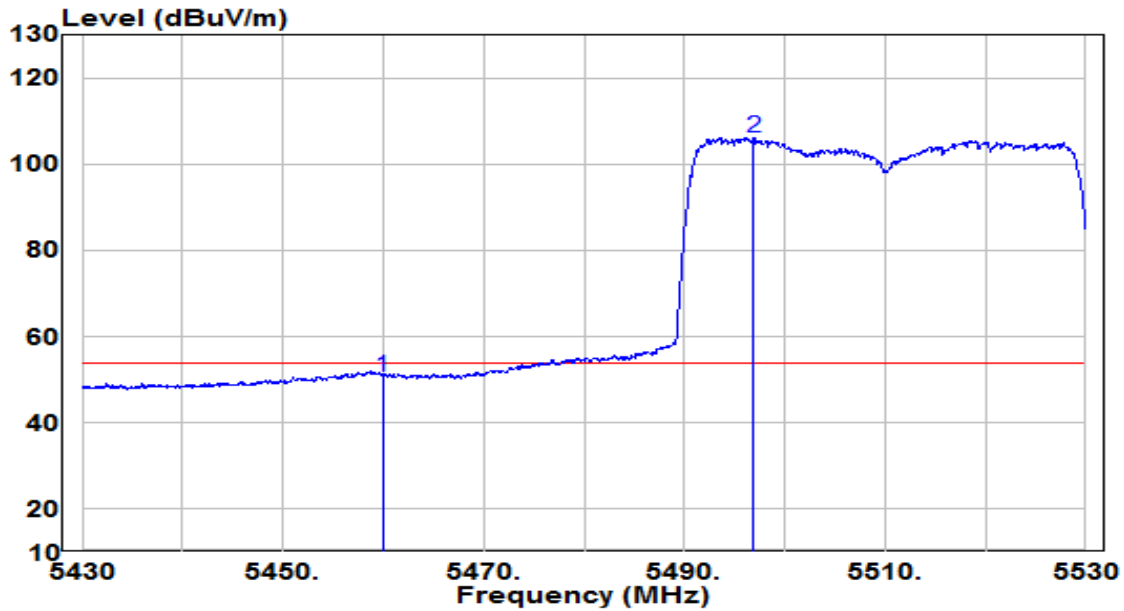


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	30.85	19.84	50.69	-3.31	54.00	Average
2	* 5496.850	86.37	19.88	106.25	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamp(ifier)(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5510MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

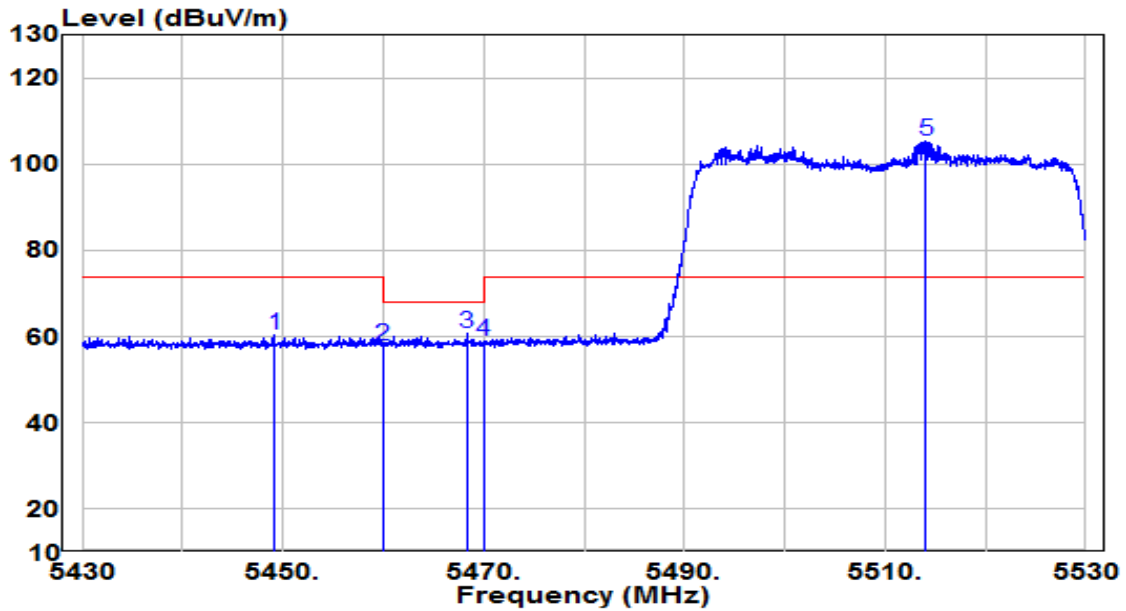


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5449.150	40.45	19.84	60.29	-13.71	74.00	Peak
2	5460.000	38.18	19.84	58.02	-10.18	68.20	Peak
3	5468.350	40.92	19.85	60.77	-7.43	68.20	Peak
4	5470.000	38.96	19.85	58.81	-9.39	68.20	Peak
5	* 5514.000	85.43	19.92	105.36	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5510MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

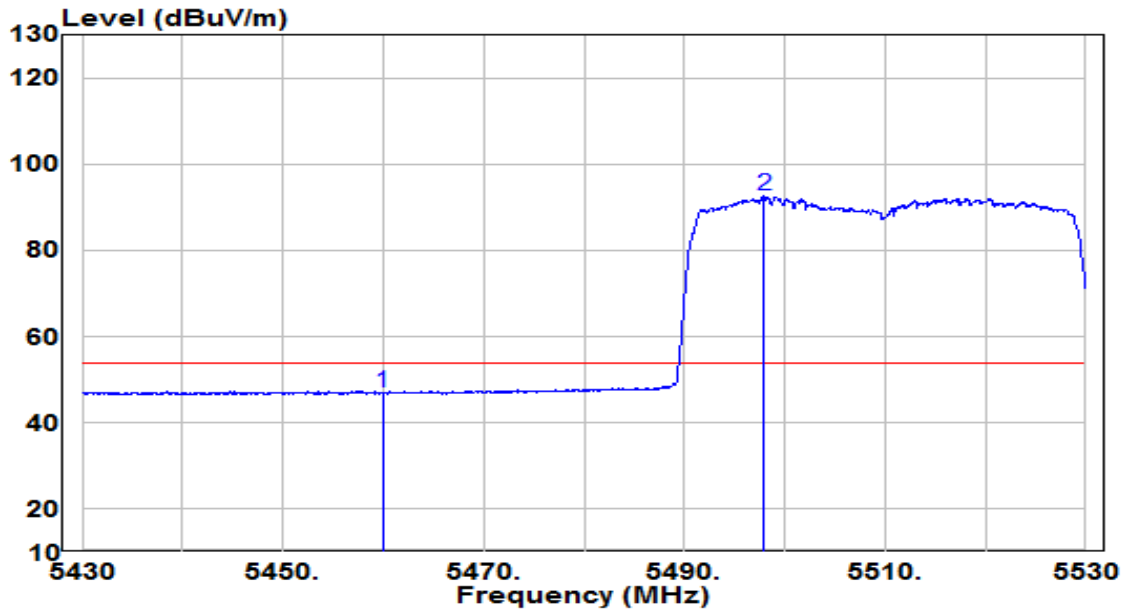


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	27.09	19.84	46.94	-7.06	54.00	Average
2	* 5497.900	72.65	19.88	92.53	N/A	N/A	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5670MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

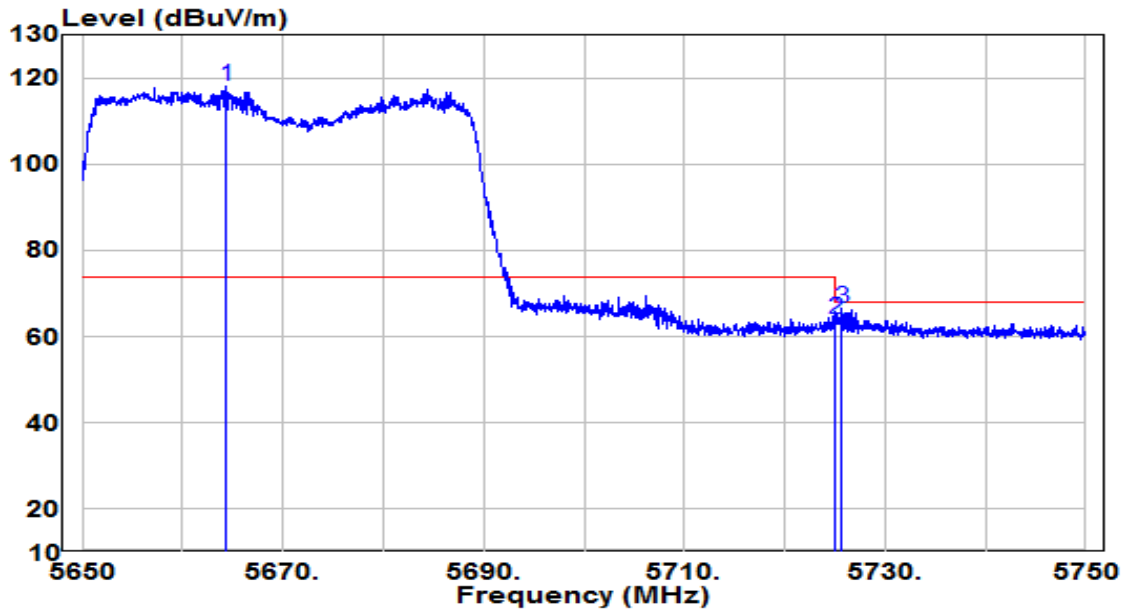


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5664.400	97.38	20.50	117.88	N/A	N/A	Peak
2	5725.000	43.43	20.73	64.17	-4.03	68.20	Peak
3	5725.700	45.80	20.74	66.53	-1.67	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5670MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

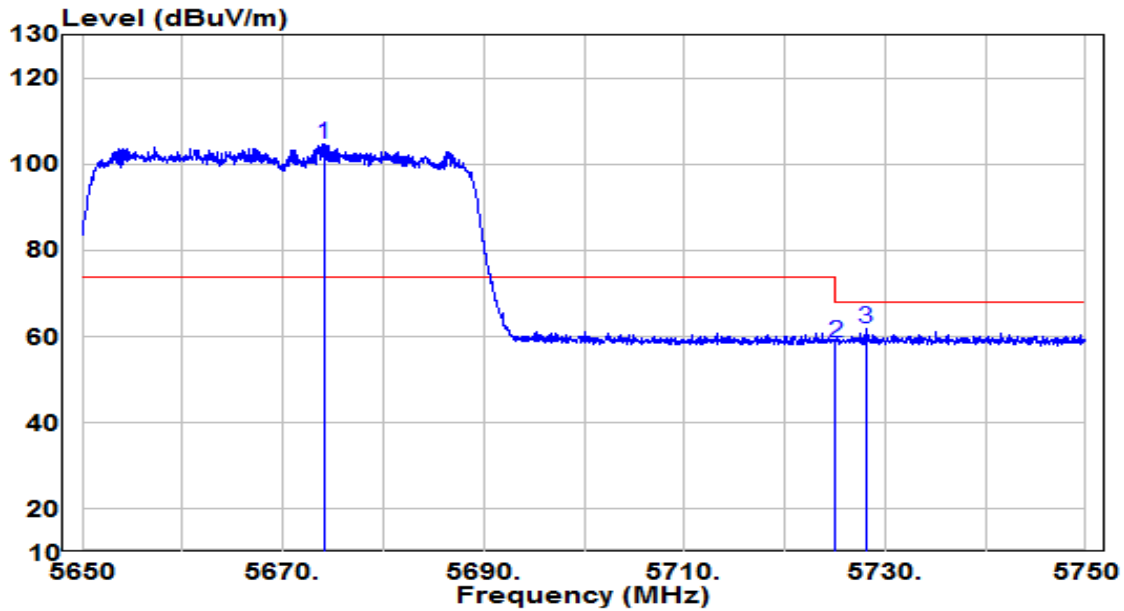


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5674.050	84.02	20.54	104.56	N/A	N/A	Peak
2	5725.000	37.95	20.73	58.69	-9.51	68.20	Peak
3	5728.050	41.20	20.75	61.95	-6.25	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5530MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

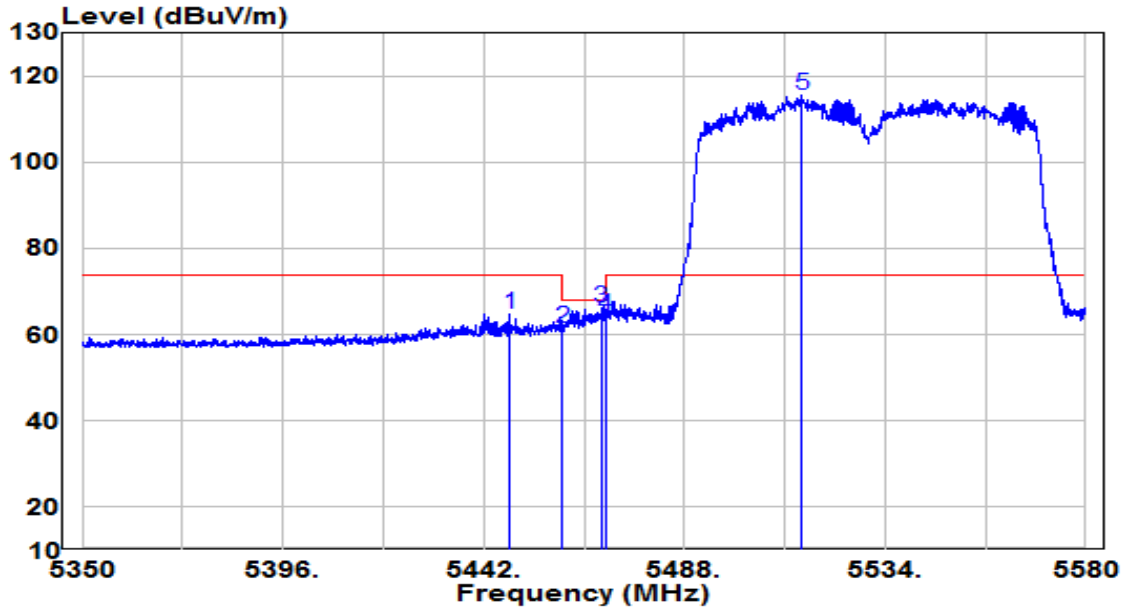


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5447.980	44.93	19.84	64.77	-9.23	74.00	Peak
2	5460.000	41.78	19.84	61.62	-6.58	68.20	Peak
3	5469.025	46.21	19.85	66.06	-2.14	68.20	Peak
4	5470.000	44.63	19.85	64.48	-3.72	68.20	Peak
5	* 5514.795	95.52	19.93	115.45	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5530MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

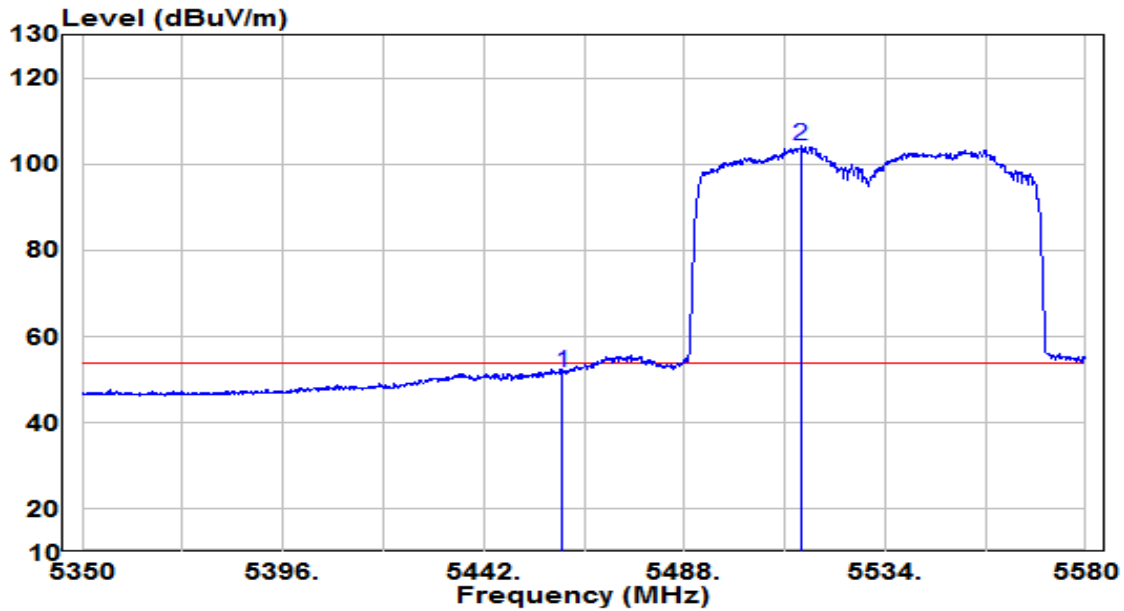


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	31.73	19.84	51.57	-2.43	54.00	Average
2	* 5514.680	84.38	19.93	104.31	N/A	N/A	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5530MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

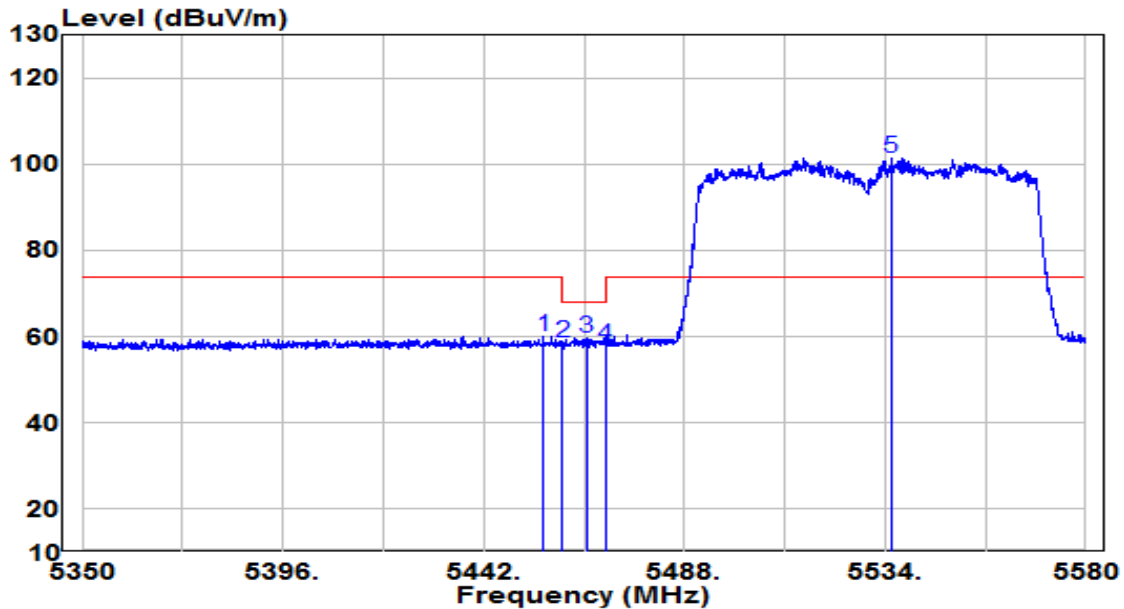


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5455.800	40.35	19.84	60.19	-13.81	74.00	Peak
2	5460.000	38.85	19.84	58.69	-9.51	68.20	Peak
3	5465.690	39.97	19.85	59.82	-8.38	68.20	Peak
4	5470.000	37.96	19.85	57.81	-10.39	68.20	Peak
5	* 5535.380	81.54	20.01	101.55	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5530MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

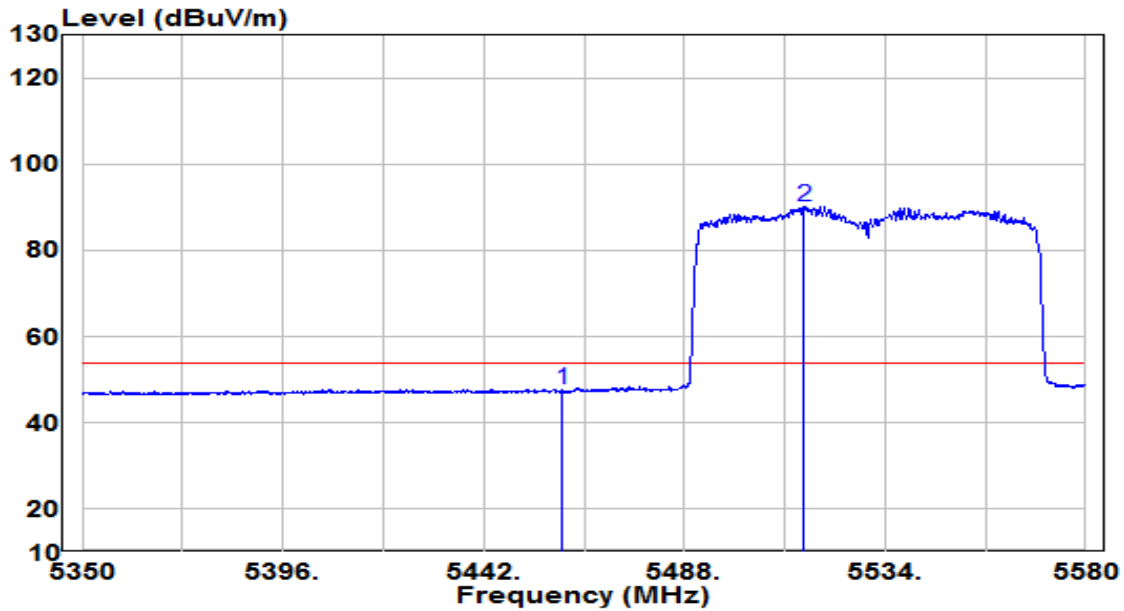


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	27.77	19.84	47.61	-6.39	54.00	Average
2	* 5515.370	70.25	19.93	90.18	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5610MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

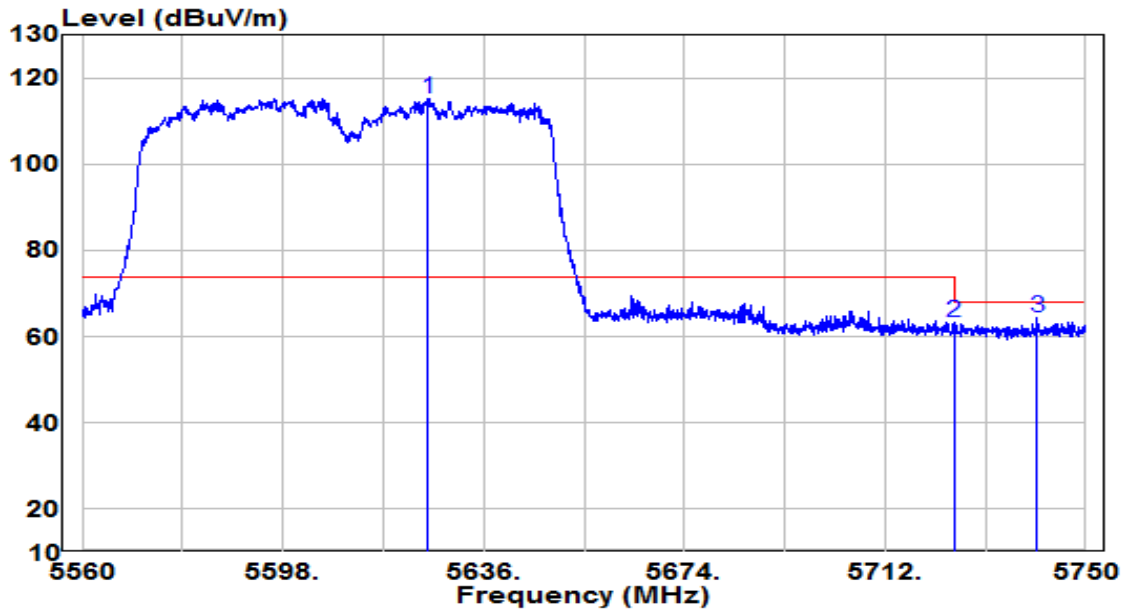


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5625.550	94.88	20.35	115.23	N/A	N/A	Peak
2	5725.000	42.53	20.73	63.26	-4.94	68.20	Peak
3	5740.785	43.78	20.79	64.57	-3.63	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5610MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

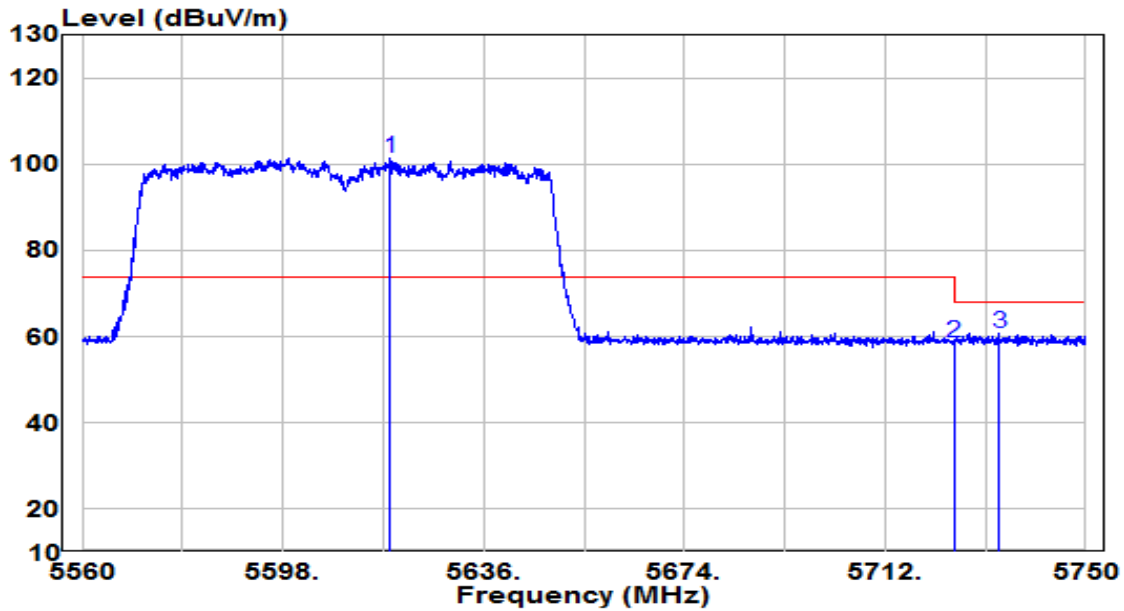


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5618.235	81.02	20.32	101.35	N/A	N/A	Peak
2	5725.000	37.88	20.73	58.61	-9.59	68.20	Peak
3	5733.660	40.14	20.77	60.90	-7.30	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE160 at channel 5570MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

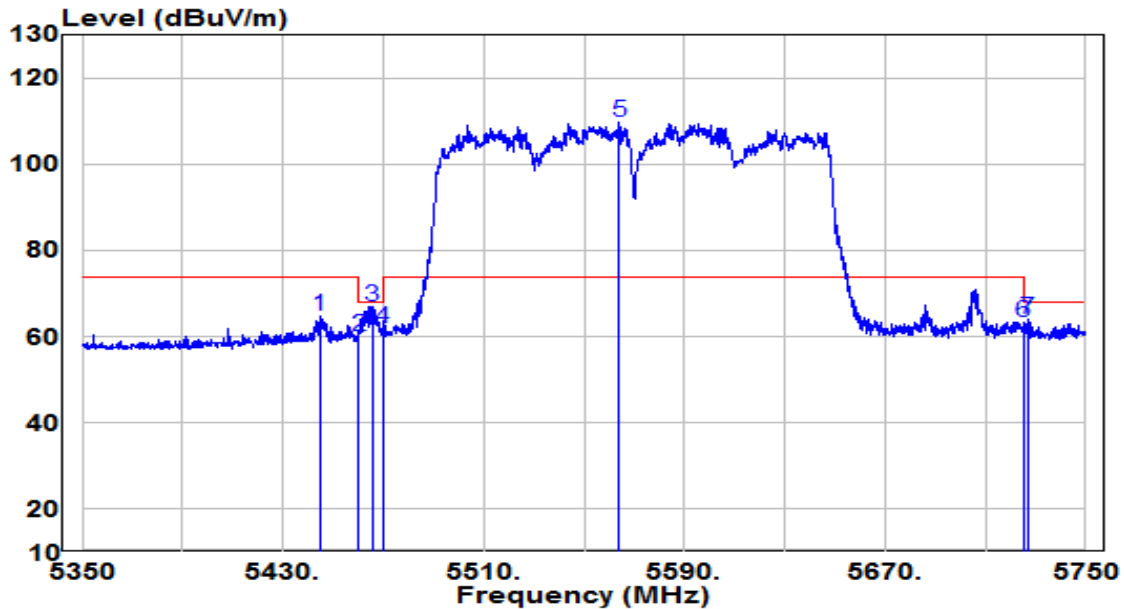


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5444.800	44.86	19.83	64.69	-9.31	74.00	Peak
2	5460.000	40.23	19.84	60.08	-8.12	68.20	Peak
3	5465.600	47.13	19.85	66.97	-1.23	68.20	Peak
4	5470.000	41.83	19.85	61.68	-6.52	68.20	Peak
5	* 5563.800	89.44	20.11	109.55	N/A	N/A	Peak
6	5725.000	42.59	20.73	63.33	-4.87	68.20	Peak
7	5726.600	43.41	20.74	64.15	-4.05	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE160 at channel 5570MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

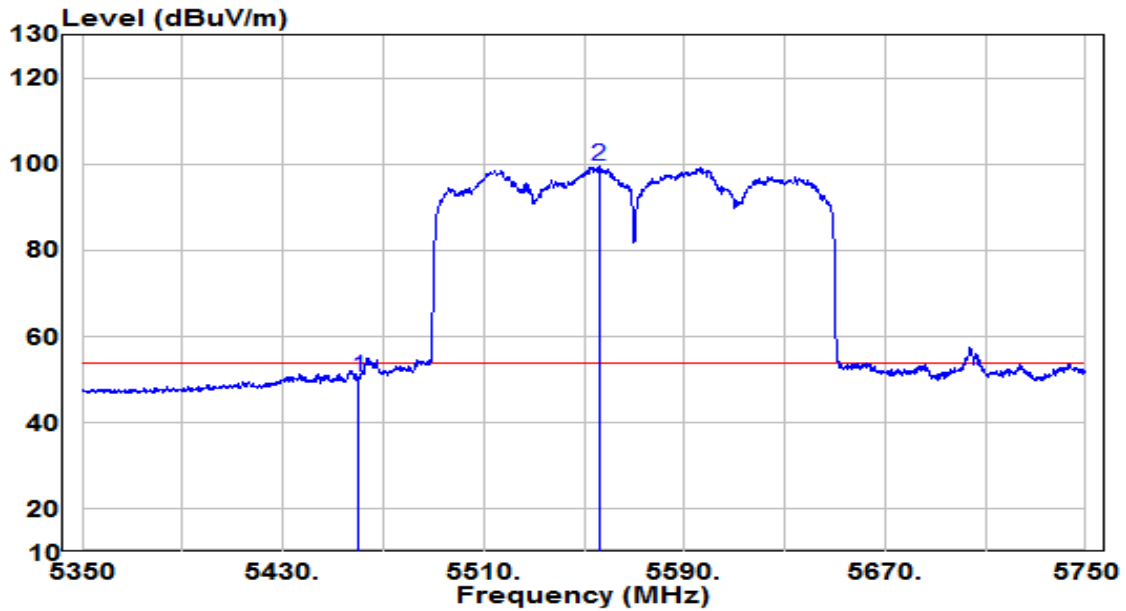


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	30.87	19.84	50.71	-3.29	54.00	Average
2	* 5556.200	79.34	20.09	99.42	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preampifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE160 at channel 5570MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

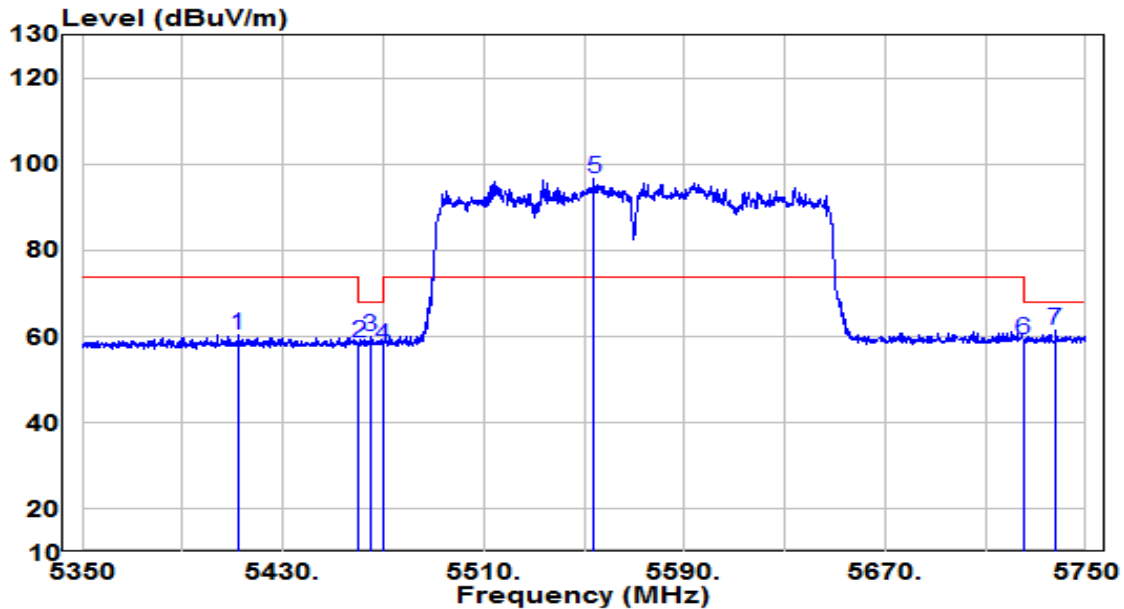


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5412.000	40.73	19.81	60.54	-13.46	74.00	Peak
2	5460.000	38.87	19.84	58.71	-9.49	68.20	Peak
3	5464.600	40.27	19.85	60.12	-8.08	68.20	Peak
4	5470.000	38.15	19.85	58.00	-10.20	68.20	Peak
5 *	5553.800	76.45	20.08	96.53	N/A	N/A	Peak
6	5725.000	38.70	20.73	59.43	-8.77	68.20	Peak
7	5737.800	40.68	20.78	61.46	-6.74	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preampfier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.2°C /35.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE160 at channel 5570MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60Hz

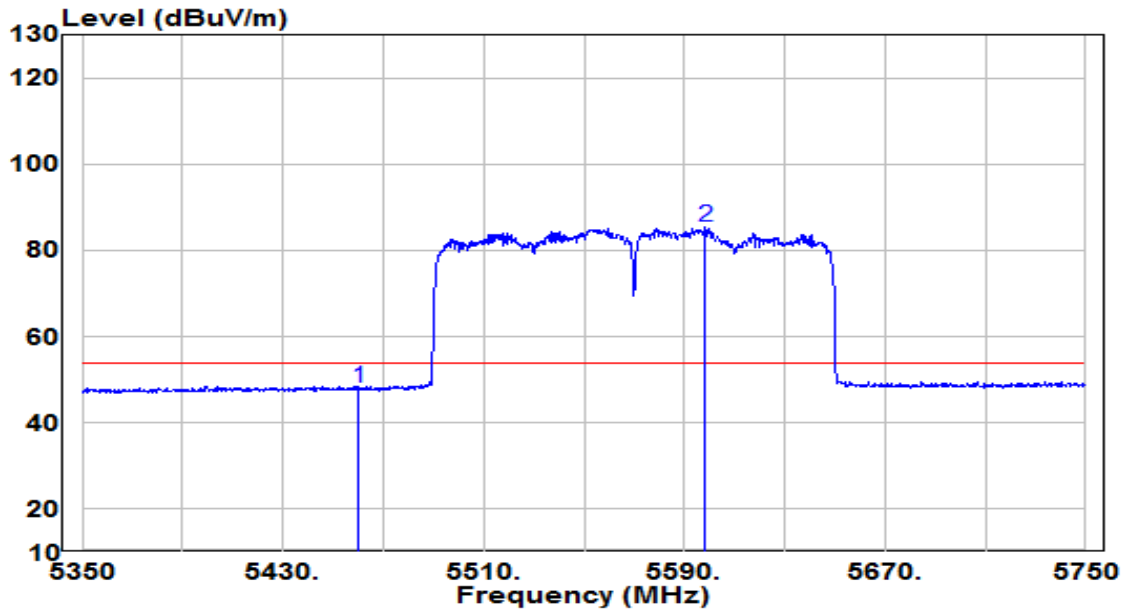


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	28.41	19.84	48.25	-5.75	54.00	Average
2	* 5598.400	65.29	20.25	85.53	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5180MHz (Beamforming Mode)	Test Voltage	120V/60Hz

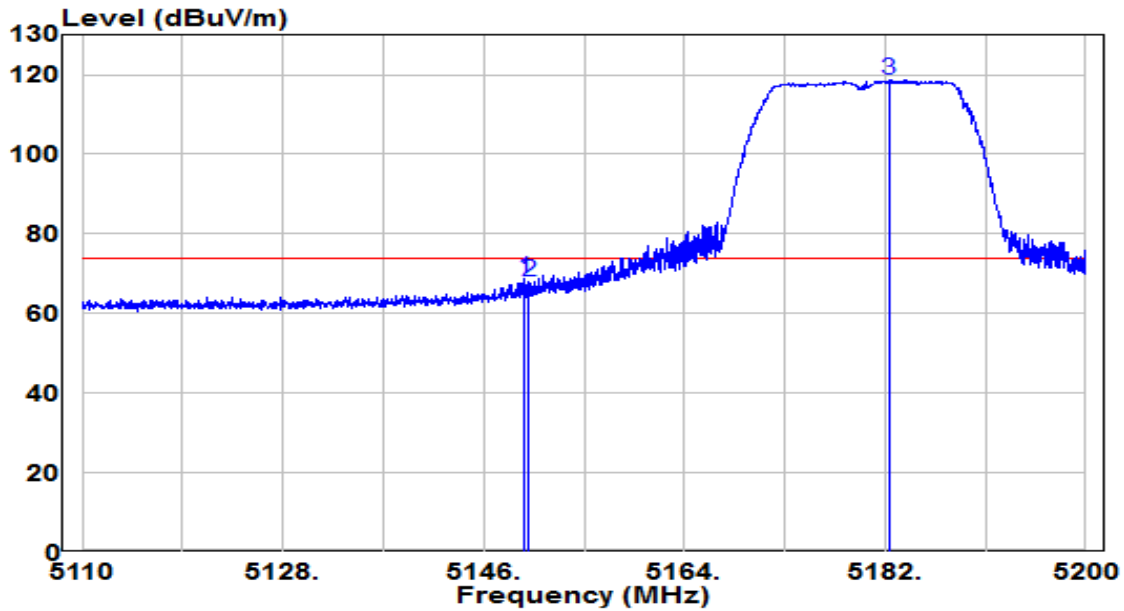


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.690	49.10	19.65	68.75	-5.25	74.00	Peak
2	5150.000	48.23	19.65	67.88	-6.12	74.00	Peak
3	* 5182.360	98.88	19.67	118.55	N/A	N/A	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5180MHz (Beamforming Mode)	Test Voltage	120V/60Hz

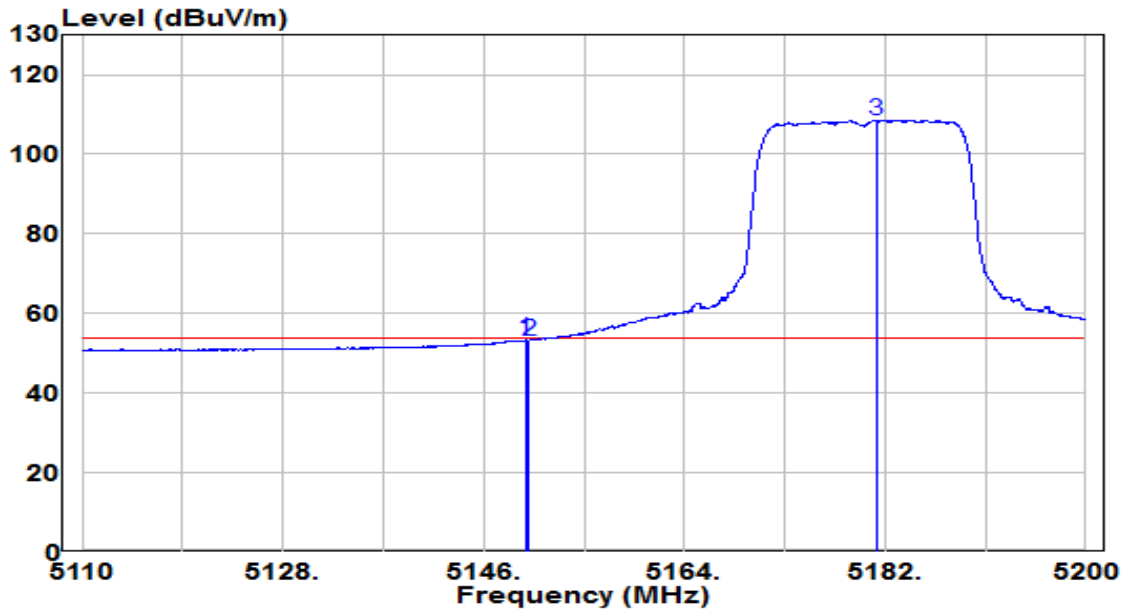


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.735	33.63	19.65	53.28	-0.72	54.00	Average
2	5150.000	33.53	19.65	53.17	-0.83	54.00	Average
3	* 5181.235	88.90	19.67	108.56	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5180MHz (Beamforming Mode)	Test Voltage	120V/60Hz

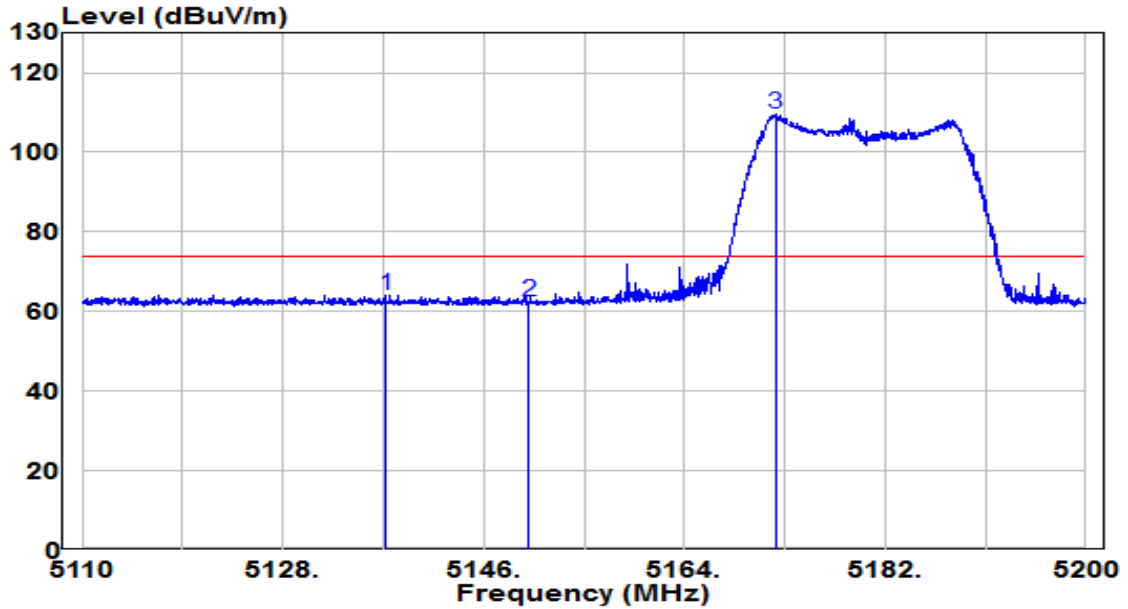


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5137.225	44.58	19.64	64.22	-9.78	74.00	Peak
2	5150.000	42.89	19.65	62.53	-11.47	74.00	Peak
3	* 5172.190	89.74	19.66	109.40	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5180MHz (Beamforming Mode)	Test Voltage	120V/60Hz

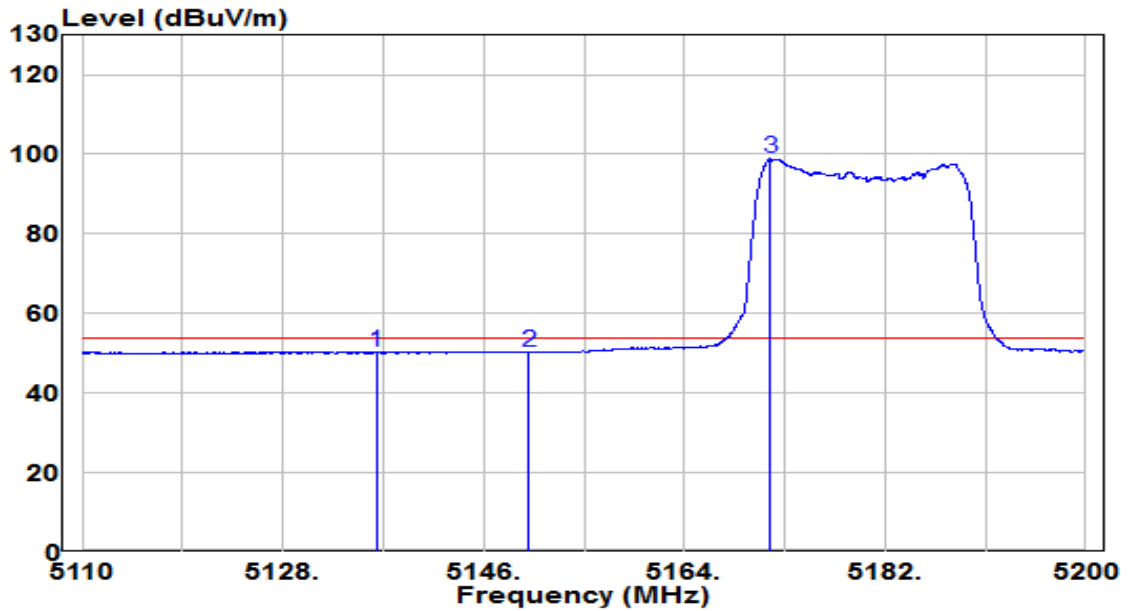


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5136.415	30.76	19.64	50.40	-3.60	54.00	Average
2	5150.000	30.68	19.65	50.33	-3.67	54.00	Average
3	* 5171.695	79.32	19.66	98.98	N/A	N/A	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5500MHz (Beamforming Mode)	Test Voltage	120V/60Hz

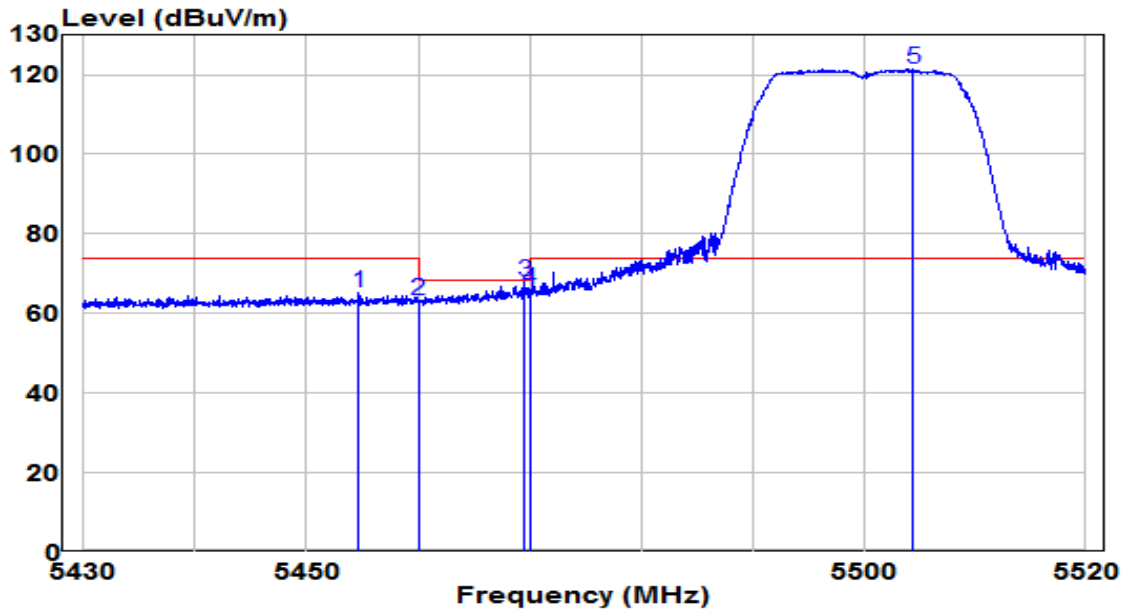


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5454.660	45.23	19.84	65.07	-8.93	74.00	Peak
2	5460.000	43.33	19.84	63.18	-5.02	68.20	Peak
3	5469.510	48.27	19.85	68.12	-0.08	68.20	Peak
4	5470.000	46.18	19.85	66.03	-2.17	68.20	Peak
5	* 5504.385	101.48	19.89	121.37	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5500MHz (Beamforming Mode)	Test Voltage	120V/60Hz

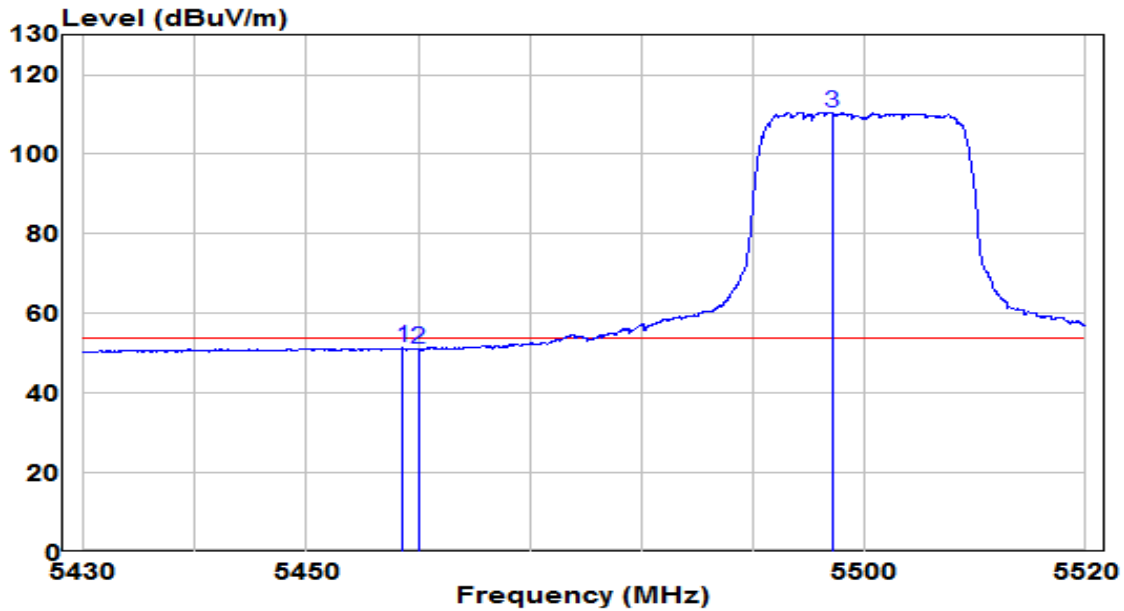


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.575	31.46	19.84	51.30	-2.70	54.00	Average
2	5460.000	31.15	19.84	51.00	-3.00	54.00	Average
3	* 5497.140	90.65	19.88	110.53	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5500MHz (Beamforming Mode)	Test Voltage	120V/60Hz

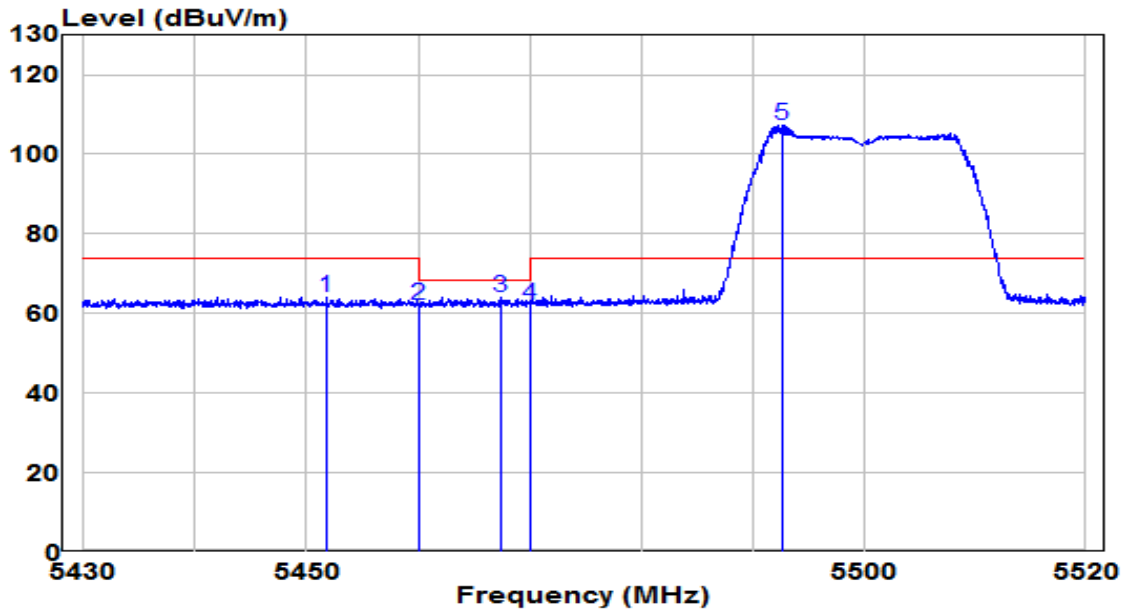


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5451.780	44.09	19.84	63.92	-10.08	74.00	Peak
2	5460.000	42.41	19.84	62.26	-5.94	68.20	Peak
3	5467.305	44.20	19.85	64.05	-4.15	68.20	Peak
4	5470.000	42.37	19.85	62.22	-5.98	68.20	Peak
5	* 5492.595	87.53	19.87	107.40	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5500MHz (Beamforming Mode)	Test Voltage	120V/60Hz

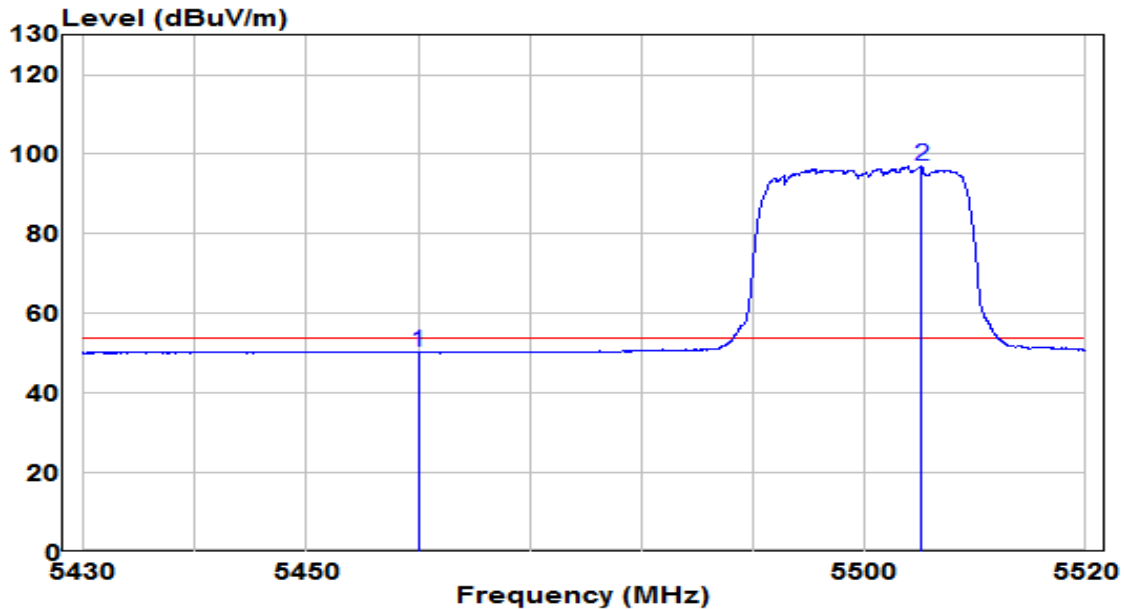


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	30.32	19.84	50.16	-3.84	54.00	Average
2	* 5505.195	77.02	19.89	96.92	N/A	N/A	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5700MHz (Beamforming Mode)	Test Voltage	120V/60Hz

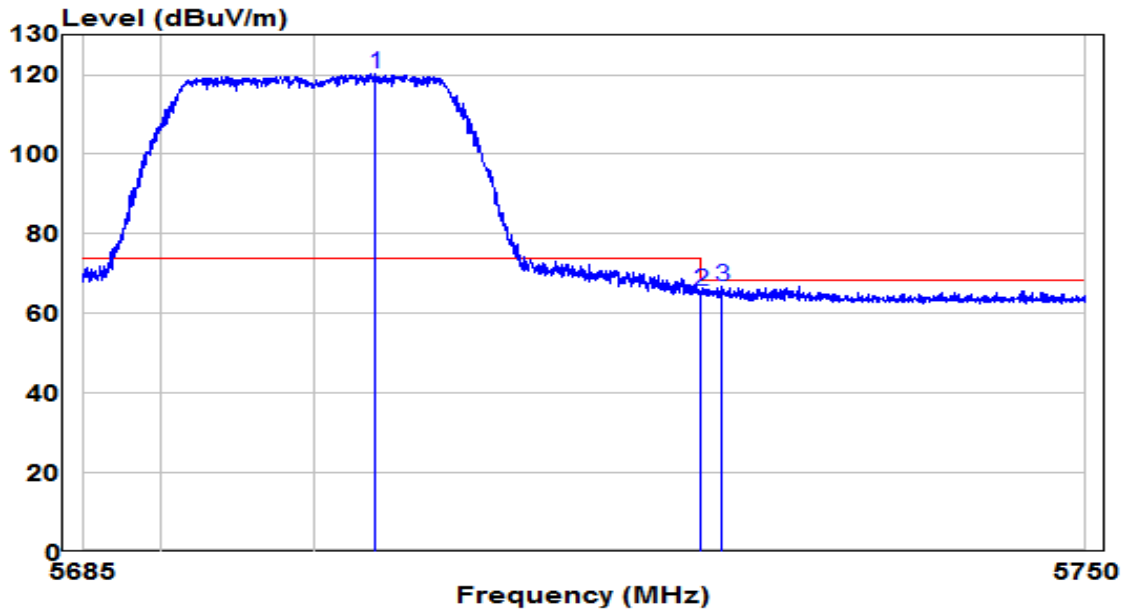


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5703.882	99.52	20.65	120.17	N/A	N/A	Peak
2	5725.000	44.91	20.73	65.65	-2.55	68.20	Peak
3	5726.373	46.21	20.74	66.94	-1.26	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5700MHz (Beamforming Mode)	Test Voltage	120V/60Hz

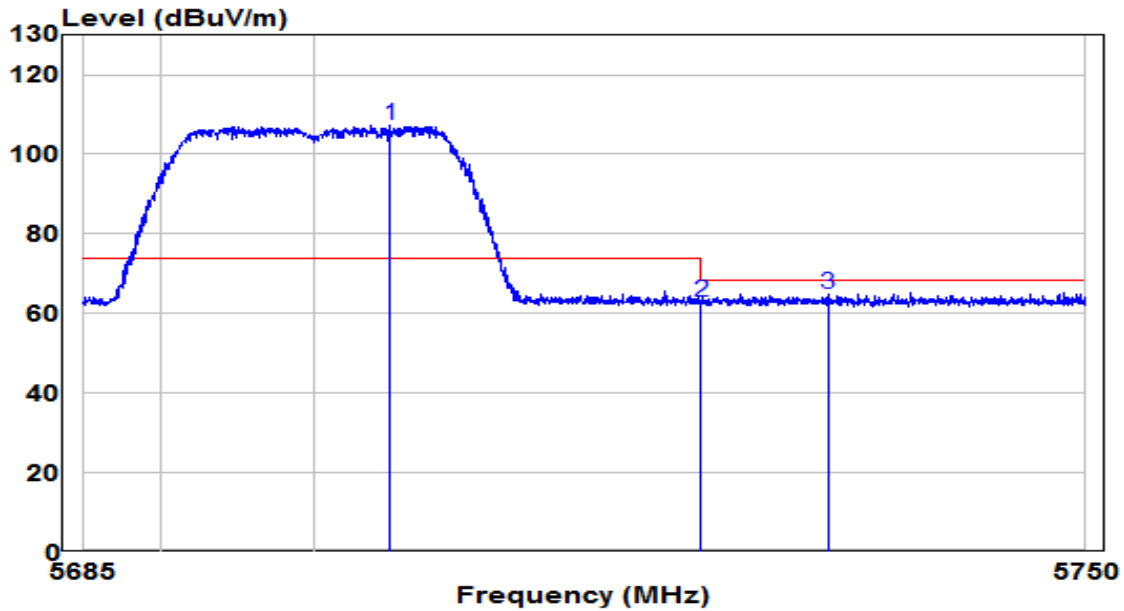


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5704.890	86.55	20.66	107.21	N/A	N/A	Peak
2	5725.000	42.22	20.73	62.96	-5.24	68.20	Peak
3	5733.230	44.17	20.77	64.94	-3.26	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5745MHz (Beamforming Mode)	Test Voltage	120V/60Hz

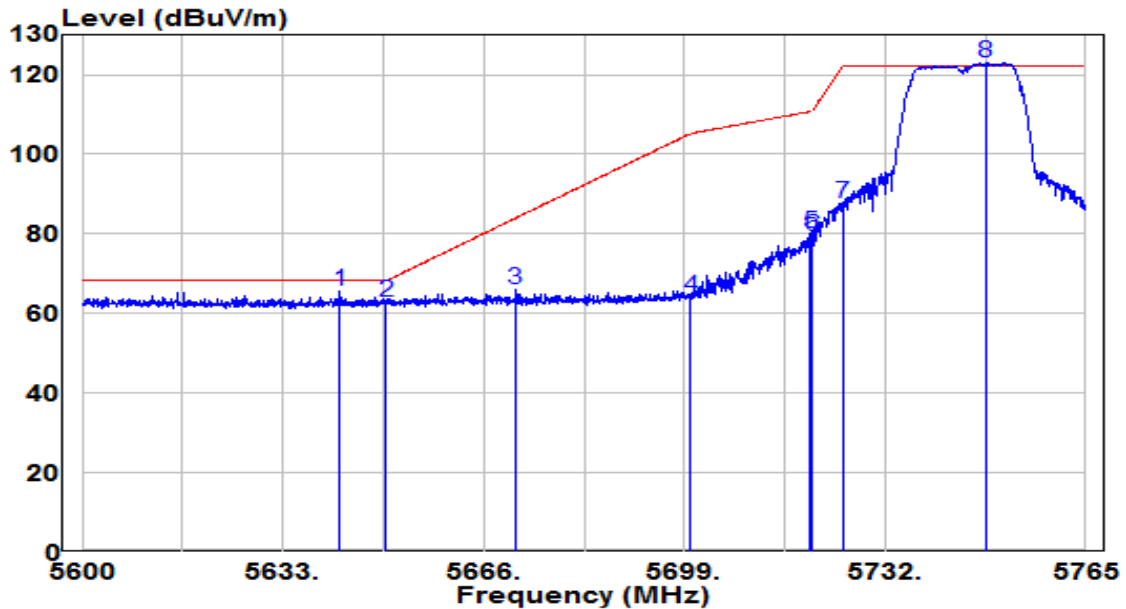


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5642.405	45.07	20.42	65.49	-2.71	68.20	Peak
2	5650.000	42.32	20.45	62.77	-5.43	68.20	Peak
3	5671.197	45.32	20.53	65.85	-18.08	83.93	Peak
4	5700.000	43.27	20.64	63.91	-41.29	105.20	Peak
5	5719.708	59.41	20.71	80.12	-30.60	110.72	Peak
6	5720.000	58.79	20.71	79.50	-31.30	110.80	Peak
7	5725.000	66.99	20.73	87.72	-34.48	122.20	Peak
8	* 5748.583	102.20	20.82	123.02	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5745MHz (Beamforming Mode)	Test Voltage	120V/60Hz

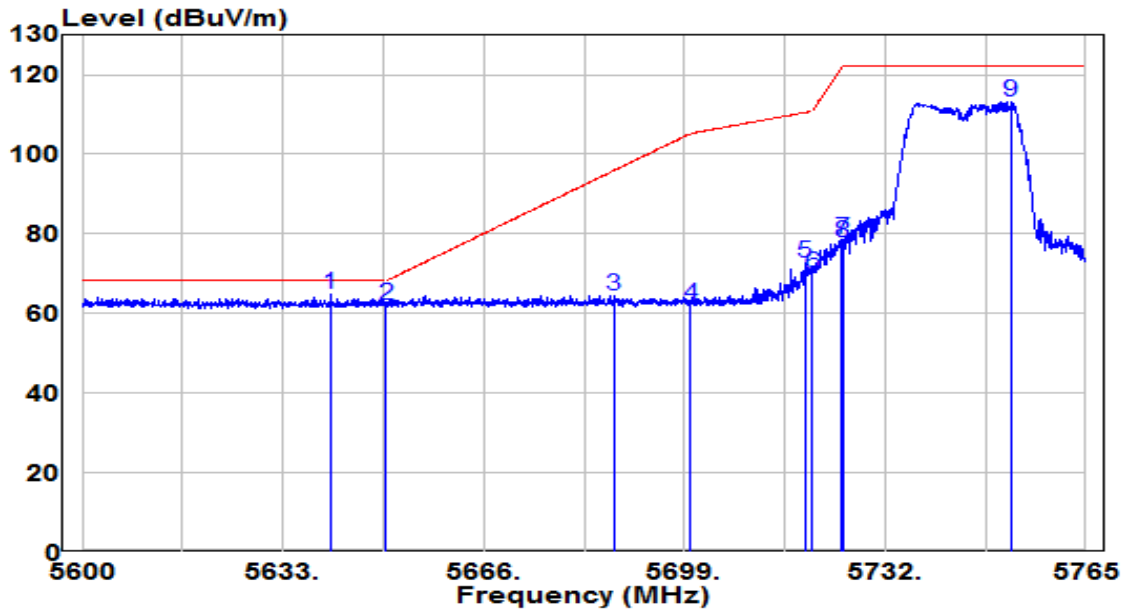


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5640.837	44.56	20.41	64.97	-3.23	68.20	Peak
2	5650.000	41.57	20.45	62.02	-6.18	68.20	Peak
3	5687.368	43.87	20.59	64.46	-31.43	95.88	Peak
4	5700.000	41.51	20.64	62.15	-43.05	105.20	Peak
5	5718.882	52.11	20.71	72.82	-37.67	110.49	Peak
6	5720.000	49.36	20.71	70.08	-40.72	110.80	Peak
7	5724.822	57.66	20.73	78.39	-43.40	121.79	Peak
8	5725.000	57.09	20.73	77.82	-44.38	122.20	Peak
9	5752.625	92.31	20.84	113.15	N/A	N/A	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5825MHz (Beamforming Mode)	Test Voltage	120V/60Hz

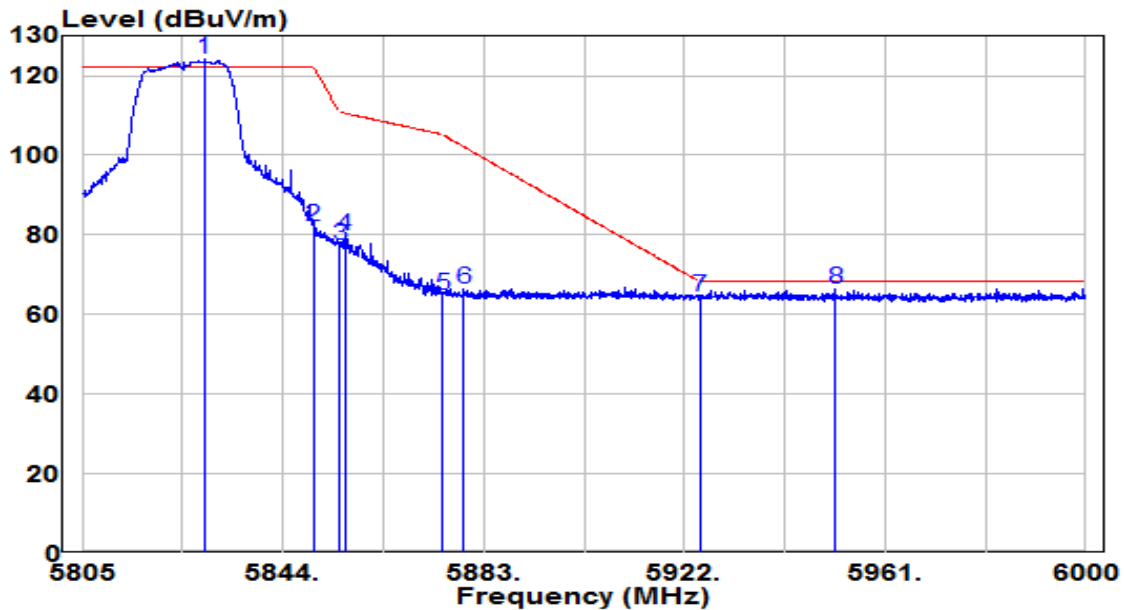


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5828.790	102.93	21.13	124.06	N/A	N/A	Peak
2	5850.000	61.08	21.21	82.29	-39.91	122.20	Peak
3	5855.000	56.13	21.23	77.36	-33.44	110.80	Peak
4	5856.090	58.36	21.24	79.60	-30.90	110.49	Peak
5	5875.000	43.41	21.31	64.72	-40.48	105.20	Peak
6	5879.197	45.14	21.33	66.46	-35.62	102.08	Peak
7	5925.000	42.93	21.50	64.43	-3.77	68.20	Peak
8	5951.250	44.68	21.60	66.29	-1.91	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5825MHz (Beamforming Mode)	Test Voltage	120V/60Hz

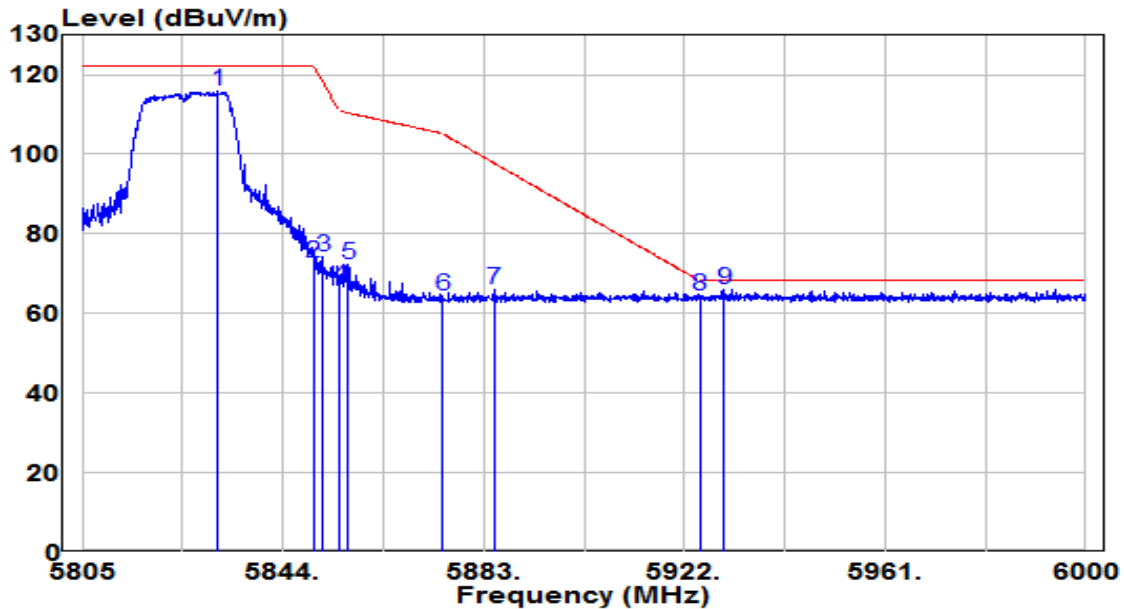


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5831.422	94.68	21.14	115.83	N/A	N/A	Peak
2	5850.000	51.37	21.21	72.58	-49.62	122.20	Peak
3	5851.703	52.94	21.22	74.16	-44.15	118.32	Peak
4	5855.000	45.73	21.23	66.96	-43.84	110.80	Peak
5	5856.675	51.08	21.24	72.32	-38.01	110.33	Peak
6	5875.000	42.96	21.31	64.27	-40.93	105.20	Peak
7	5884.950	44.84	21.35	66.19	-31.63	97.81	Peak
8	5925.000	42.93	21.50	64.43	-3.77	68.20	Peak
9	* 5929.800	44.31	21.52	65.83	-2.37	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz (Beamforming Mode)	Test Voltage	120V/60Hz

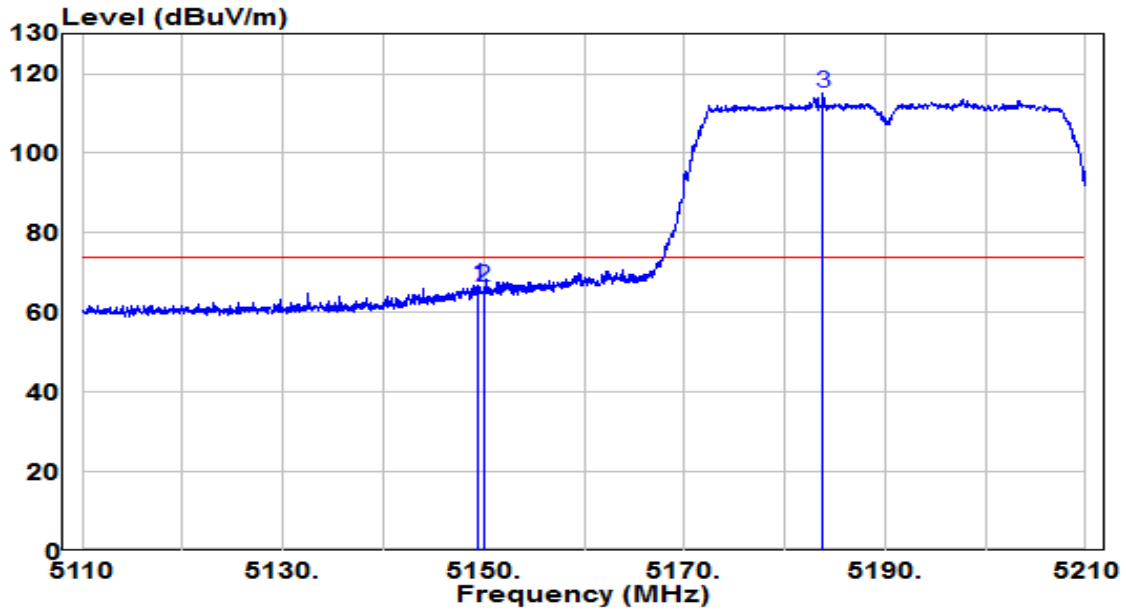


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.500	47.05	19.65	66.70	-7.30	74.00	Peak
2	5150.000	46.75	19.65	66.40	-7.60	74.00	Peak
3	* 5183.750	95.45	19.67	115.12	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz (Beamforming Mode)	Test Voltage	120V/60Hz

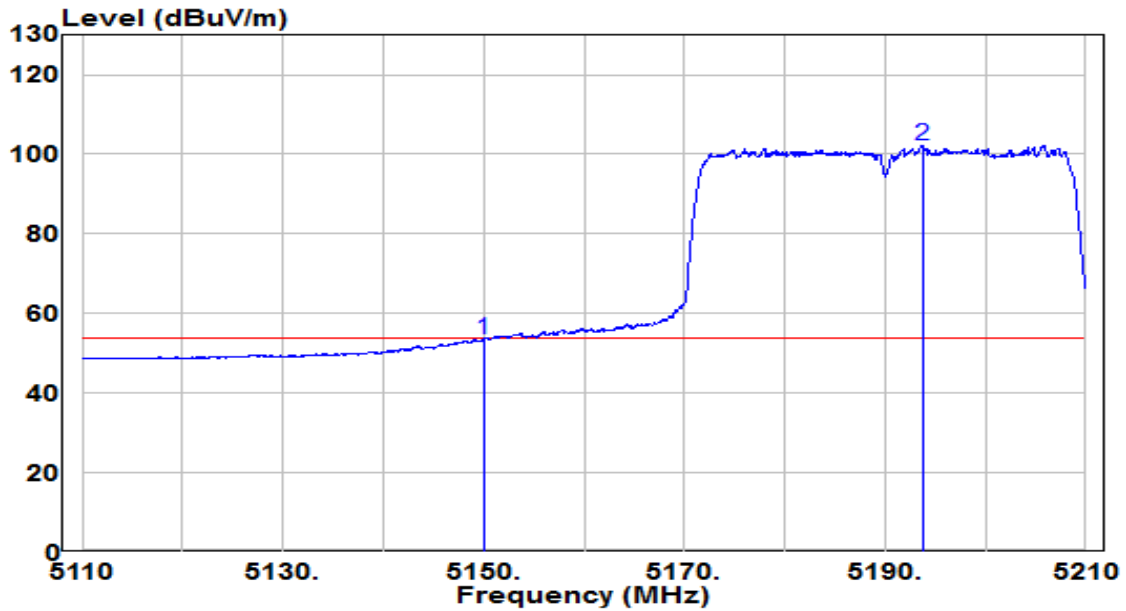


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	33.91	19.65	53.55	-0.45	54.00	Average
2	* 5193.750	82.48	19.67	102.16	N/A	N/A	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz (Beamforming Mode)	Test Voltage	120V/60Hz

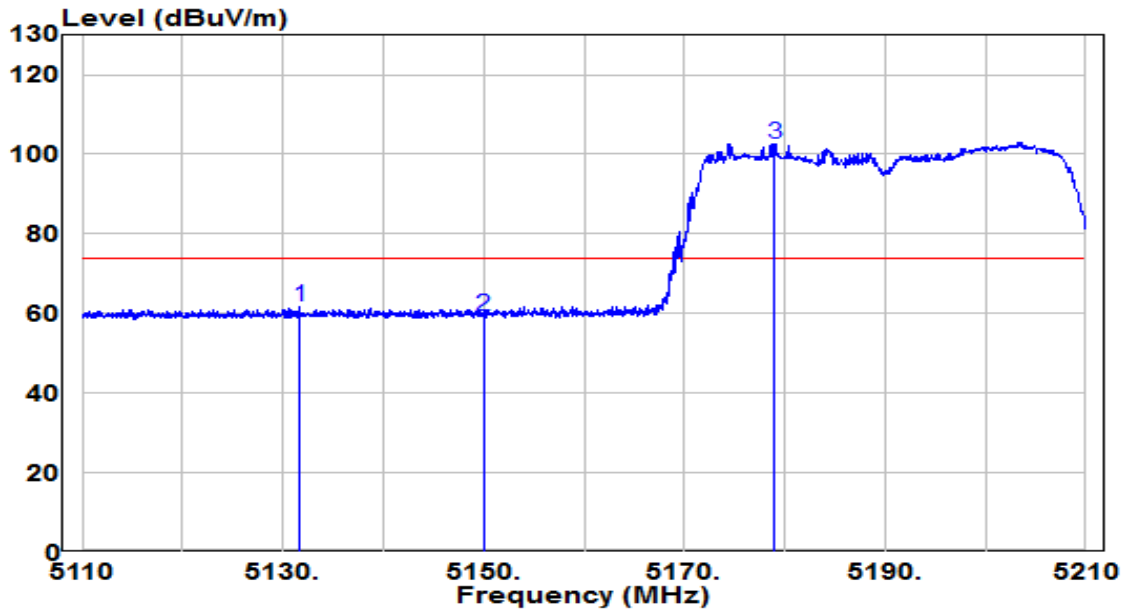


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5131.700	41.91	19.63	61.55	-12.45	74.00	Peak
2	5150.000	39.69	19.65	59.33	-14.67	74.00	Peak
3	* 5179.000	83.05	19.66	102.71	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz (Beamforming Mode)	Test Voltage	120V/60Hz

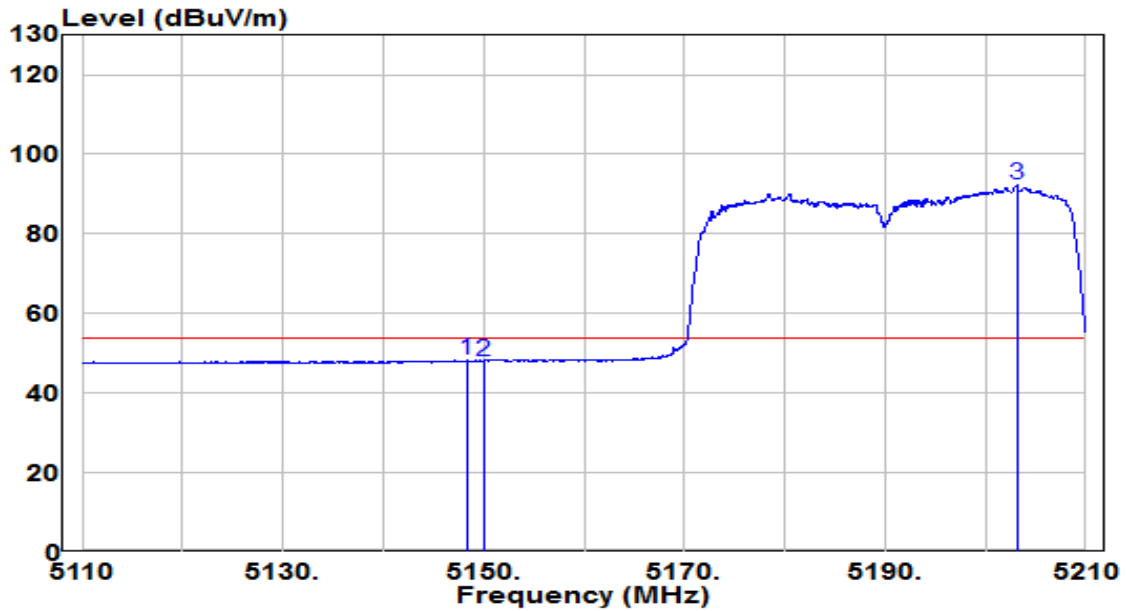


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.350	28.53	19.65	48.17	-5.83	54.00	Average
2	5150.000	28.45	19.65	48.10	-5.90	54.00	Average
3	* 5203.100	72.47	19.68	92.15	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5510MHz (Beamforming Mode)	Test Voltage	120V/60Hz

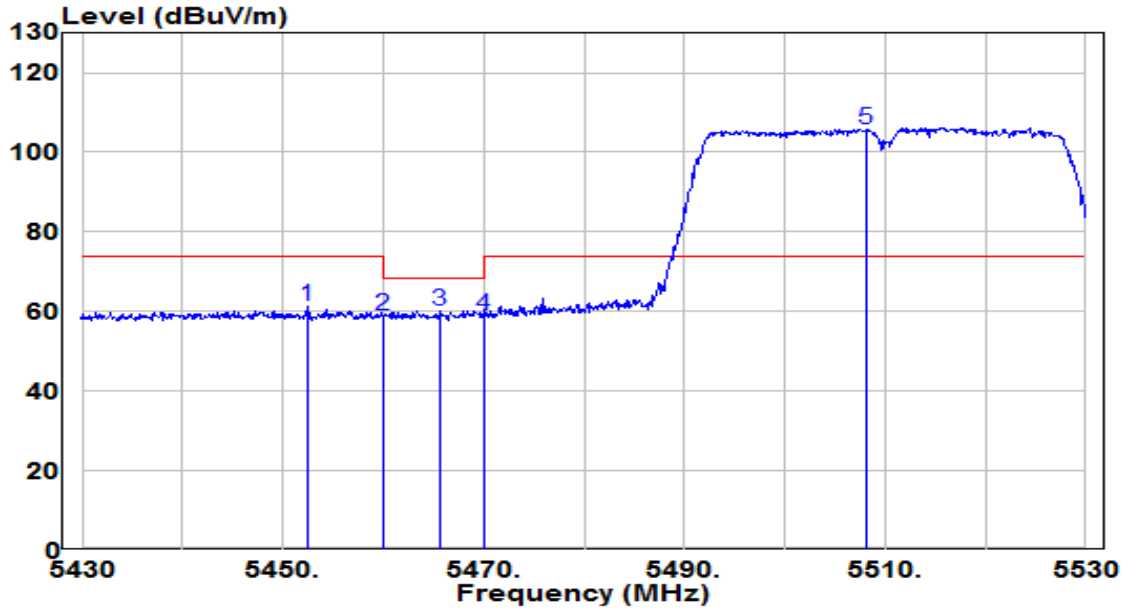


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5452.385	41.32	19.84	61.16	-12.84	74.00	Peak
2	5460.000	39.16	19.84	59.00	-9.20	68.20	Peak
3	5465.590	40.31	19.85	60.16	-8.04	68.20	Peak
4	5470.000	39.12	19.85	58.97	-9.23	68.20	Peak
5	* 5508.055	85.86	19.90	105.76	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5510MHz (Beamforming Mode)	Test Voltage	120V/60Hz

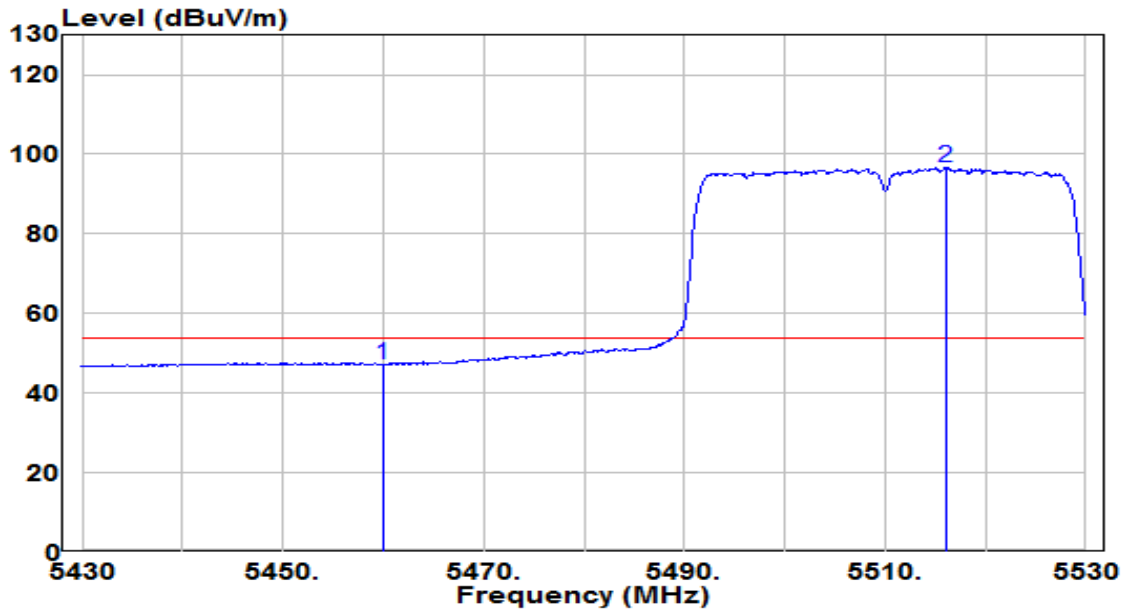


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	27.32	19.84	47.16	-6.84	54.00	Average
2	* 5516.035	76.84	19.93	96.77	N/A	N/A	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5510MHz (Beamforming Mode)	Test Voltage	120V/60Hz

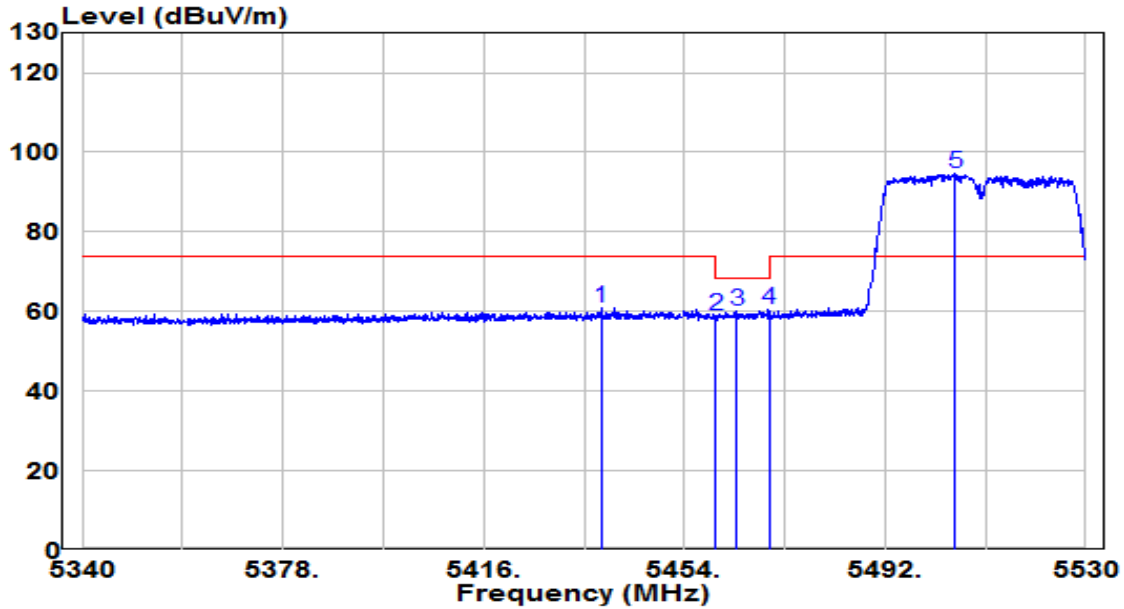


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5438.230	41.04	19.83	60.87	-13.13	74.00	Peak
2	5460.000	39.00	19.84	58.85	-9.35	68.20	Peak
3	5463.975	40.12	19.85	59.96	-8.24	68.20	Peak
4	5470.000	40.46	19.85	60.31	-7.89	68.20	Peak
5	* 5505.300	74.97	19.89	94.86	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5510MHz (Beamforming Mode)	Test Voltage	120V/60Hz

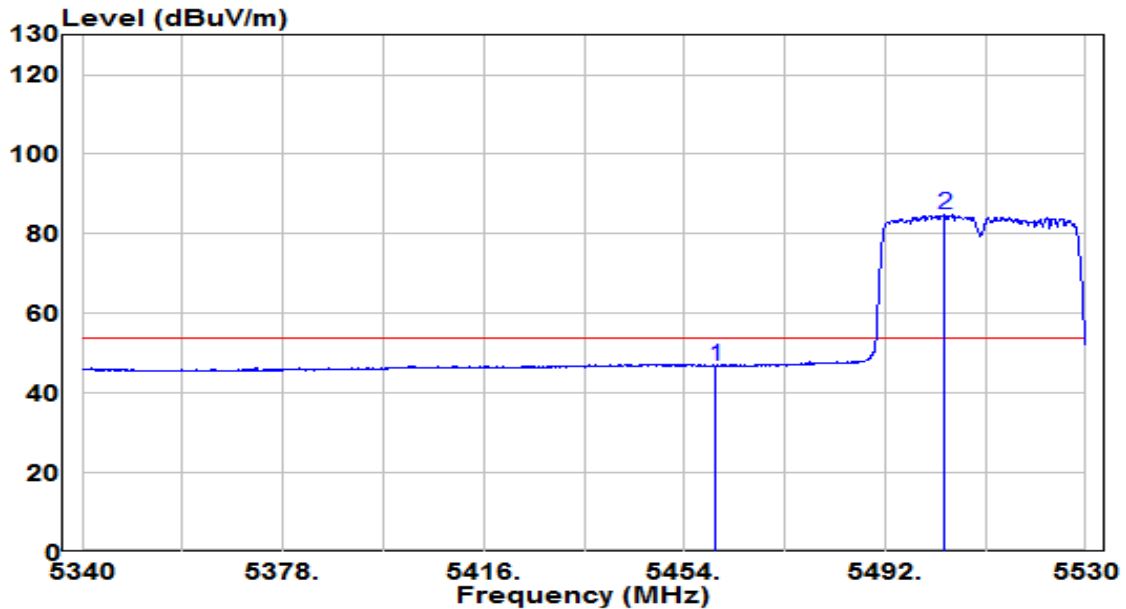


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	27.07	19.84	46.91	-7.09	54.00	Average
2	* 5503.305	65.03	19.89	84.92	N/A	N/A	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5670MHz (Beamforming Mode)	Test Voltage	120V/60Hz

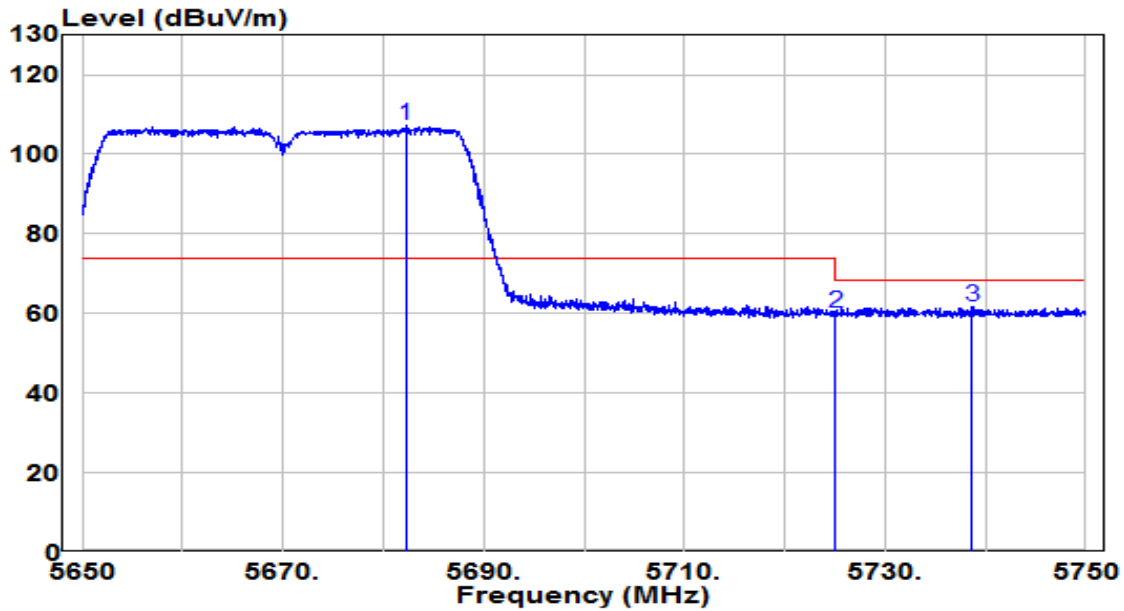


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5682.250	86.62	20.57	107.19	N/A	N/A	Peak
2	5725.000	39.53	20.73	60.26	-7.94	68.20	Peak
3	5738.650	41.03	20.79	61.82	-6.38	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5670MHz (Beamforming Mode)	Test Voltage	120V/60Hz

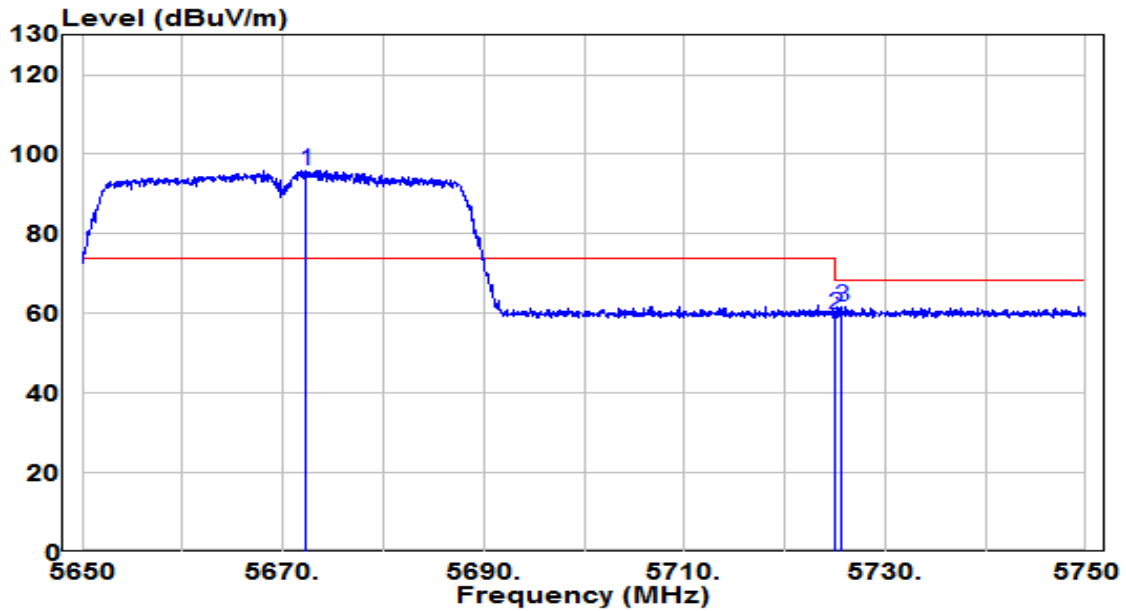


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5672.350	75.24	20.53	95.77	N/A	N/A	Peak
2	5725.000	38.93	20.73	59.66	-8.54	68.20	Peak
3	5725.700	40.91	20.74	61.65	-6.55	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C /45%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11 ac-VHT40 at channel 5755 (Beamforming Mode)	Test Voltage	230V/50Hz

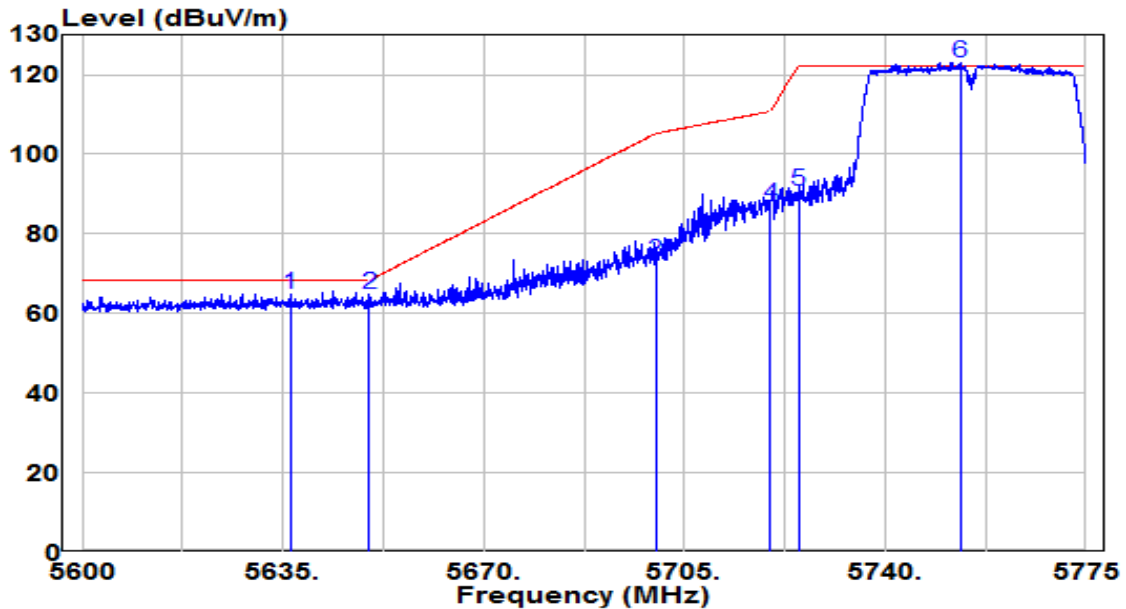


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5636.225	44.57	20.39	64.96	-3.24	68.20	Peak
2	5649.962	44.44	20.45	64.89	-3.31	68.20	Peak
3	5700.000	52.26	20.64	72.90	-32.30	105.20	Peak
4	5720.000	66.45	20.71	87.17	-23.63	110.80	Peak
5	5725.000	70.16	20.73	90.90	-31.30	122.20	Peak
6	* 5753.125	102.20	20.84	123.04	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C /45%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11 ac-VHT40 at channel 5755 (Beamforming Mode)	Test Voltage	230V/50Hz

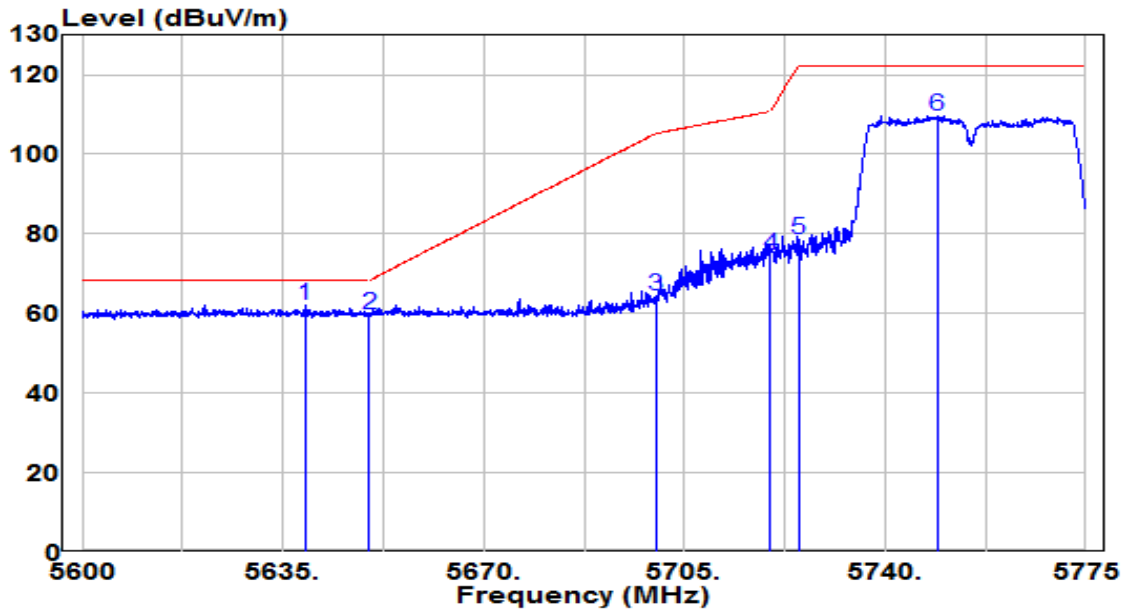


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5638.850	41.67	20.40	62.07	-6.13	68.20	Peak
2	5649.962	39.20	20.45	59.65	-8.55	68.20	Peak
3	5700.000	43.93	20.64	64.57	-40.63	105.20	Peak
4	5720.000	54.11	20.71	74.82	-35.98	110.80	Peak
5	5725.000	57.98	20.73	78.72	-43.48	122.20	Peak
6	5749.100	88.74	20.83	109.56	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C /45%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11 ac-VHT40 at channel 5795 (Beamforming Mode)	Test Voltage	230V/50Hz

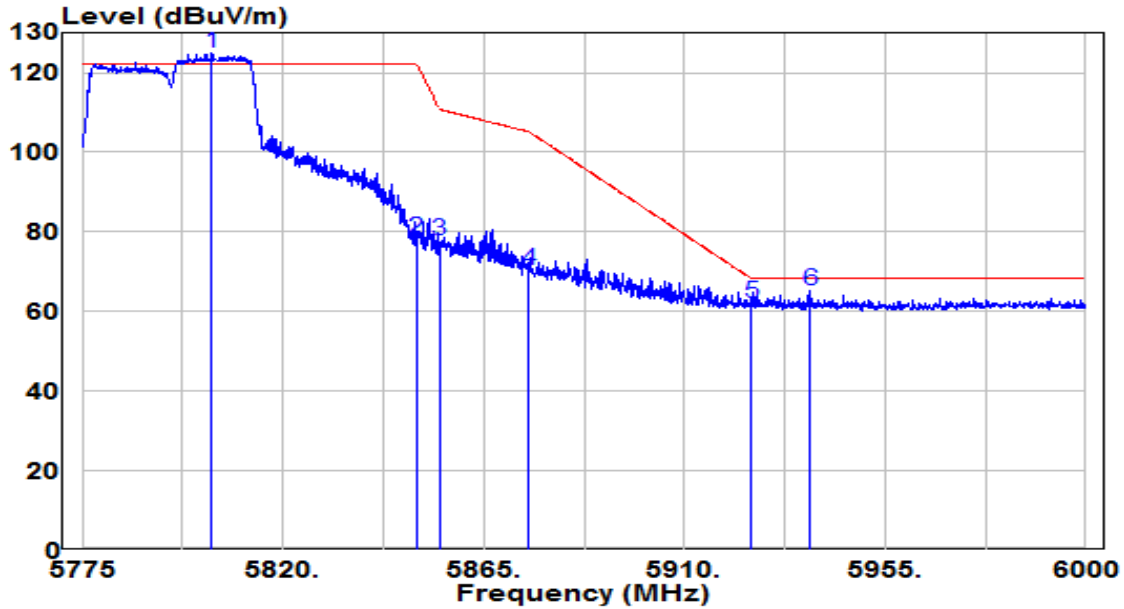


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5804.138	103.80	21.04	124.84	N/A	N/A	Peak
2	5850.038	57.07	21.21	78.28	-43.83	122.11	Peak
3	5855.000	56.45	21.23	77.68	-33.12	110.80	Peak
4	5875.000	49.08	21.31	70.39	-34.81	105.20	Peak
5	5925.000	40.44	21.50	61.94	-6.26	68.20	Peak
6	5938.125	43.83	21.55	65.39	-2.81	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C /45%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11 ac-VHT40 at channel 5795 (Beamforming Mode)	Test Voltage	230V/50Hz

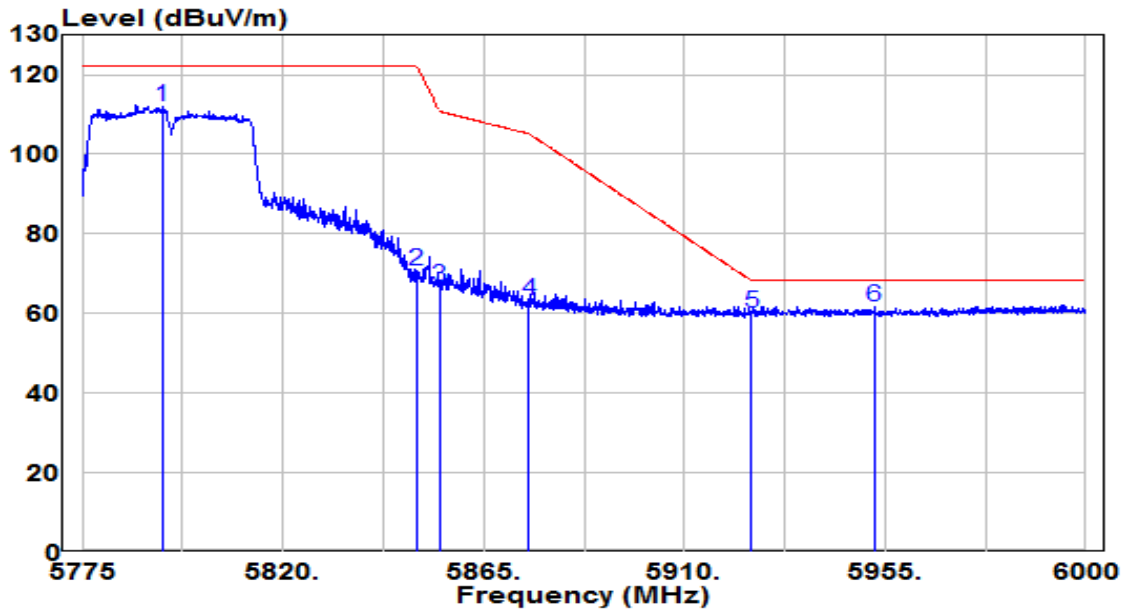


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5793.000	91.02	21.00	112.02	N/A	N/A	Peak
2	5850.038	49.46	21.21	70.67	-51.44	122.11	Peak
3	5855.000	45.72	21.23	66.95	-43.85	110.80	Peak
4	5875.000	41.98	21.31	63.29	-41.91	105.20	Peak
5	5925.000	38.79	21.50	60.29	-7.91	68.20	Peak
6	* 5952.638	40.07	21.61	61.68	-6.52	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz (Beamforming Mode)	Test Voltage	120V/60Hz

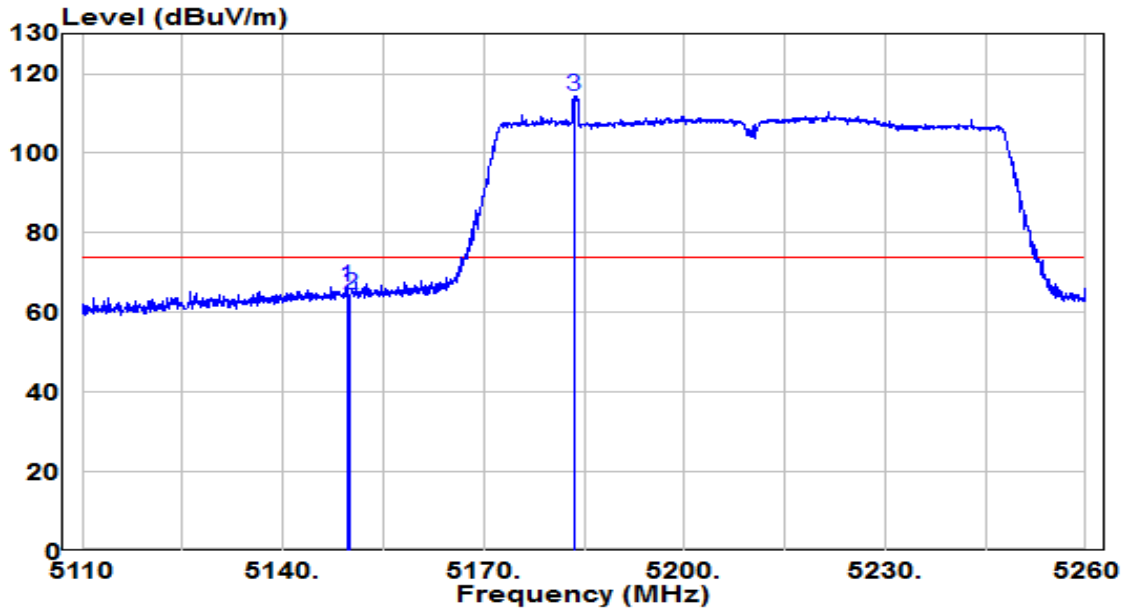


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.525	46.77	19.65	66.41	-7.59	74.00	Peak
2	5150.000	44.69	19.65	64.34	-9.66	74.00	Peak
3	* 5183.500	94.73	19.67	114.40	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz (Beamforming Mode)	Test Voltage	120V/60Hz

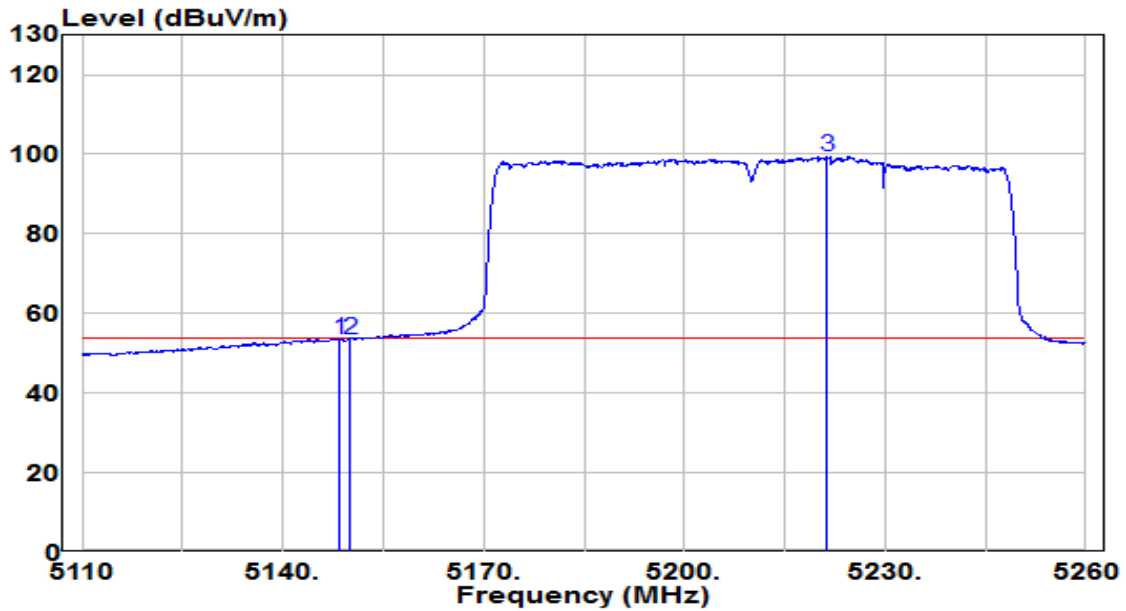


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.475	33.96	19.65	53.61	-0.39	54.00	Average
2	5150.000	33.83	19.65	53.47	-0.53	54.00	Average
3	* 5221.375	79.72	19.69	99.42	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz (Beamforming Mode)	Test Voltage	120V/60Hz

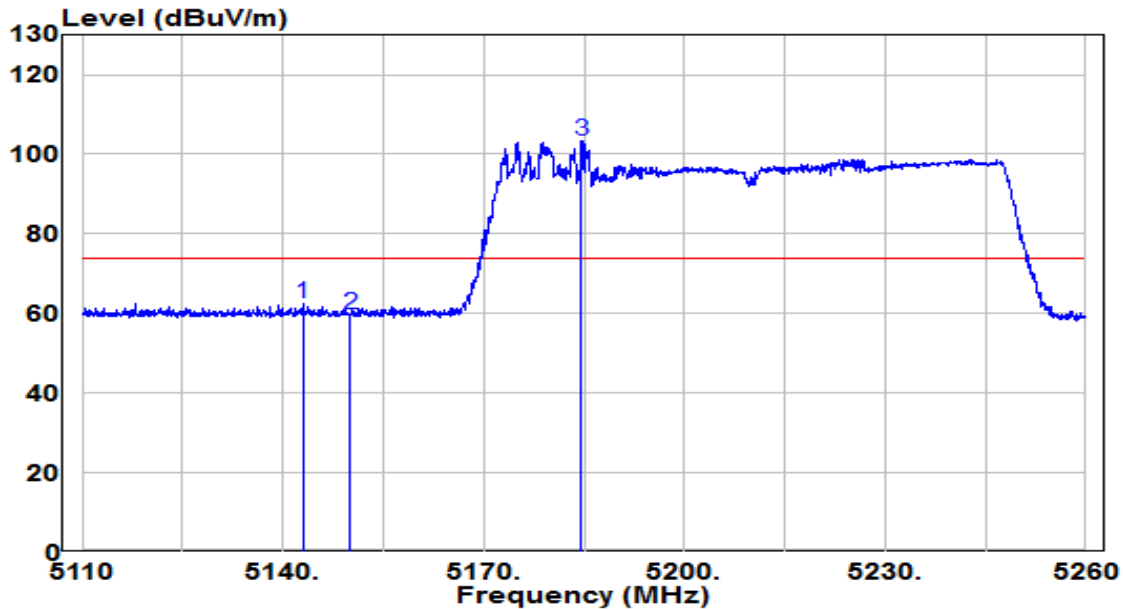


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5143.000	42.73	19.64	62.37	-11.63	74.00	Peak
2	5150.000	40.10	19.65	59.75	-14.25	74.00	Peak
3	* 5184.625	83.63	19.67	103.30	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz (Beamforming Mode)	Test Voltage	120V/60Hz

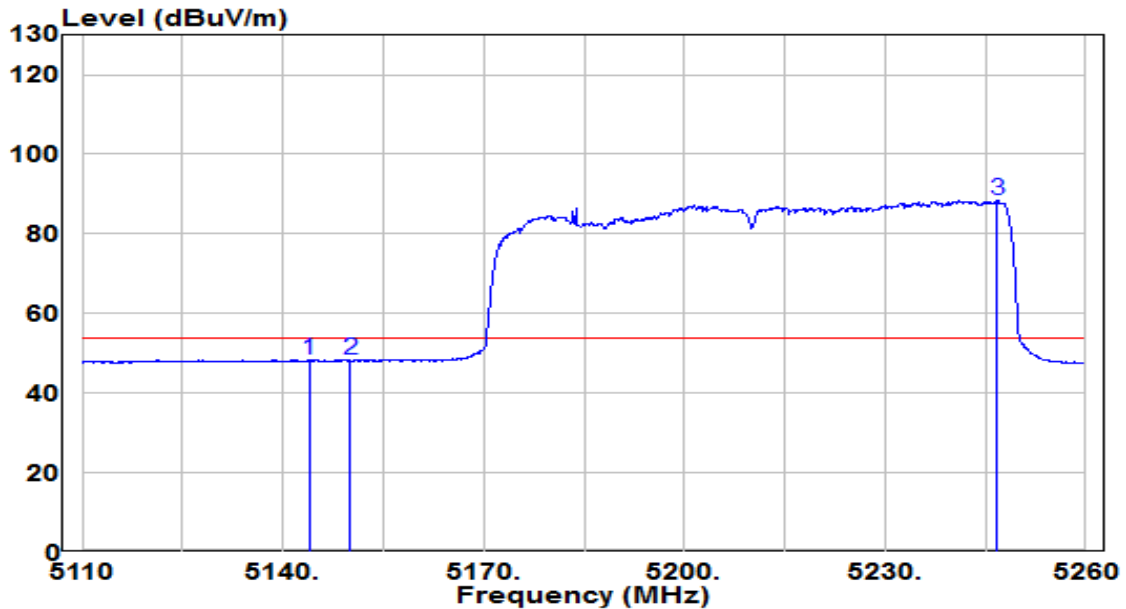


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5143.900	28.72	19.64	48.36	-5.64	54.00	Average
2	5150.000	28.49	19.65	48.14	-5.86	54.00	Average
3	* 5246.800	68.59	19.71	88.30	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5530MHz (Beamforming Mode)	Test Voltage	120V/60Hz

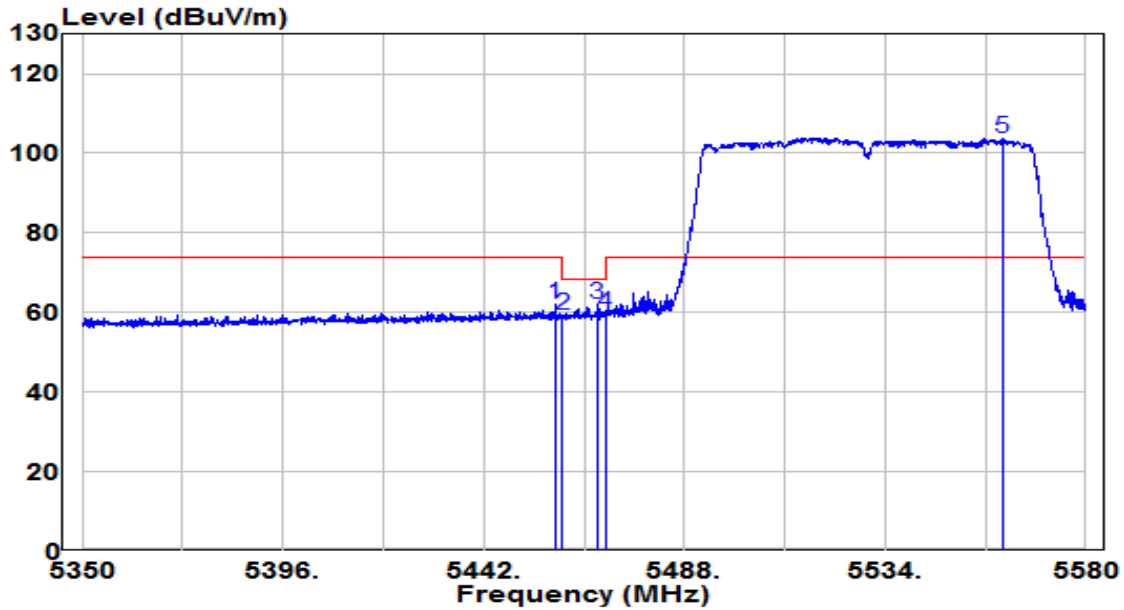


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.330	42.09	19.84	61.94	-12.06	74.00	Peak
2	5460.000	39.45	19.84	59.29	-8.91	68.20	Peak
3	5467.990	42.36	19.85	62.21	-5.99	68.20	Peak
4	5470.000	39.92	19.85	59.77	-8.43	68.20	Peak
5	* 5560.795	83.78	20.10	103.89	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5530MHz (Beamforming Mode)	Test Voltage	120V/60Hz

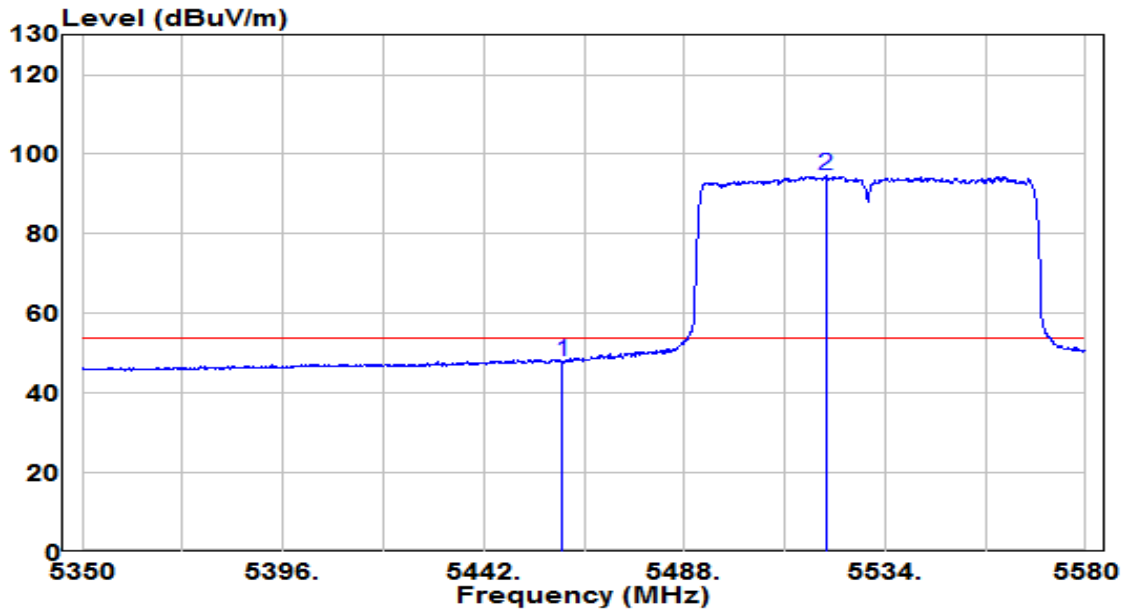


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	28.21	19.84	48.06	-5.94	54.00	Average
2	* 5520.430	74.54	19.95	94.49	N/A	N/A	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5530MHz (Beamforming Mode)	Test Voltage	120V/60Hz

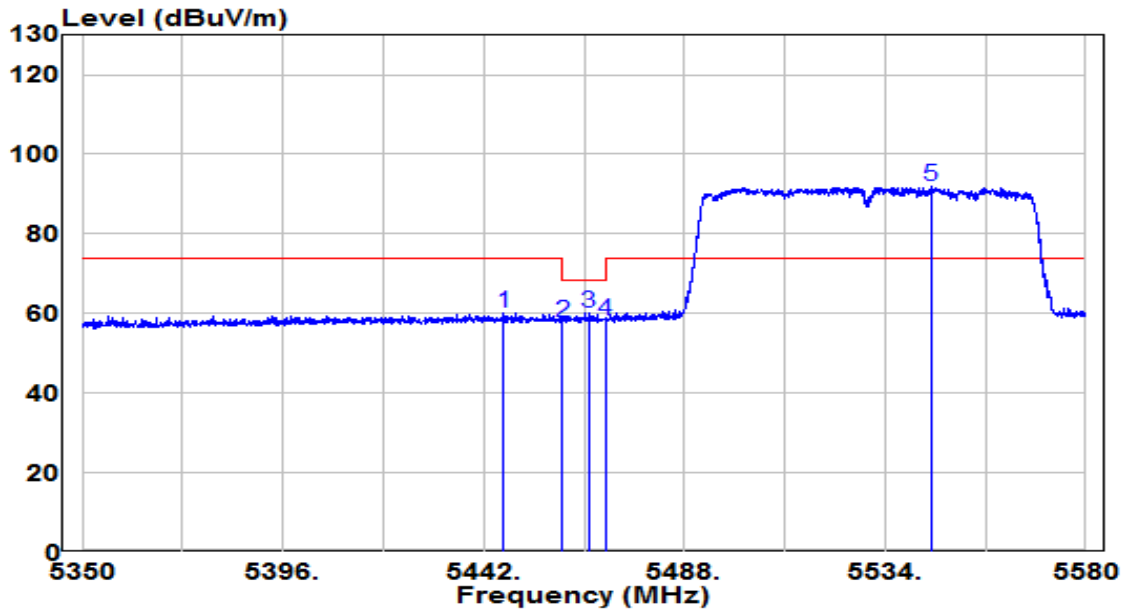


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5446.600	40.25	19.84	60.08	-13.92	74.00	Peak
2	5460.000	37.90	19.84	57.74	-10.46	68.20	Peak
3	5466.035	40.37	19.85	60.21	-7.99	68.20	Peak
4	5470.000	38.43	19.85	58.28	-9.92	68.20	Peak
5	* 5544.580	72.03	20.04	92.07	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5530MHz (Beamforming Mode)	Test Voltage	120V/60Hz

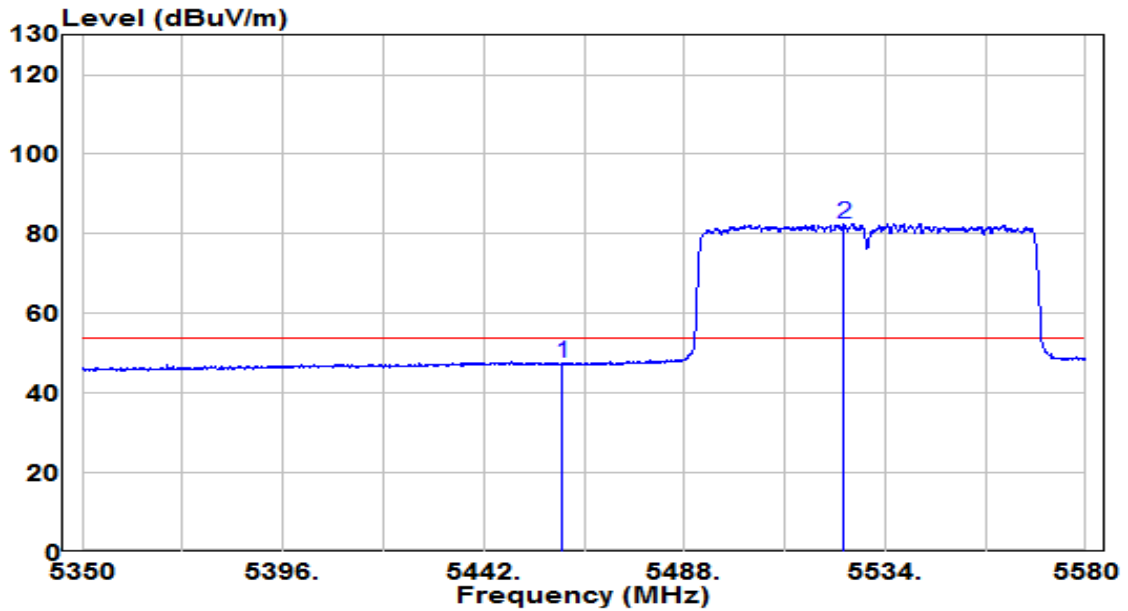


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	27.62	19.84	47.46	-6.54	54.00	Average
2	* 5524.570	62.72	19.96	82.68	N/A	N/A	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5610MHz (Beamforming Mode)	Test Voltage	120V/60Hz

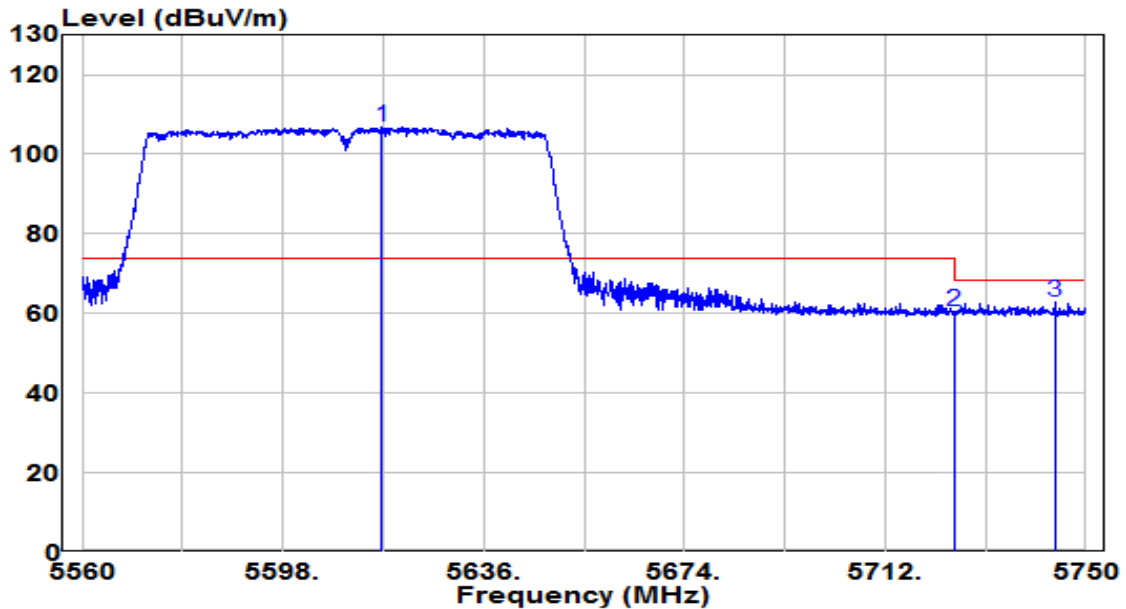


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5616.810	86.43	20.32	106.75	N/A	N/A	Peak
2	5725.000	39.58	20.73	60.31	-7.89	68.20	Peak
3	5744.110	42.07	20.81	62.88	-5.32	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5610MHz (Beamforming Mode)	Test Voltage	120V/60Hz

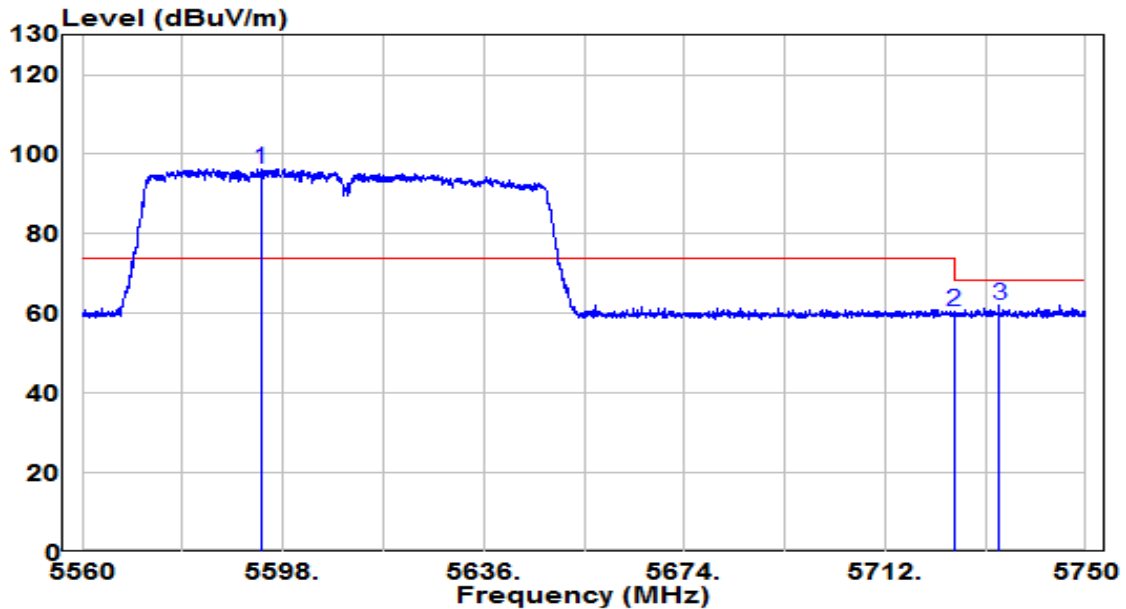


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5593.915	75.95	20.23	96.18	N/A	N/A	Peak
2	5725.000	39.67	20.73	60.41	-7.79	68.20	Peak
3	5733.565	41.26	20.77	62.03	-6.17	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C /45%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11 ac-VHT80 at channel 5775 (Beamforming Mode)	Test Voltage	230V/50Hz

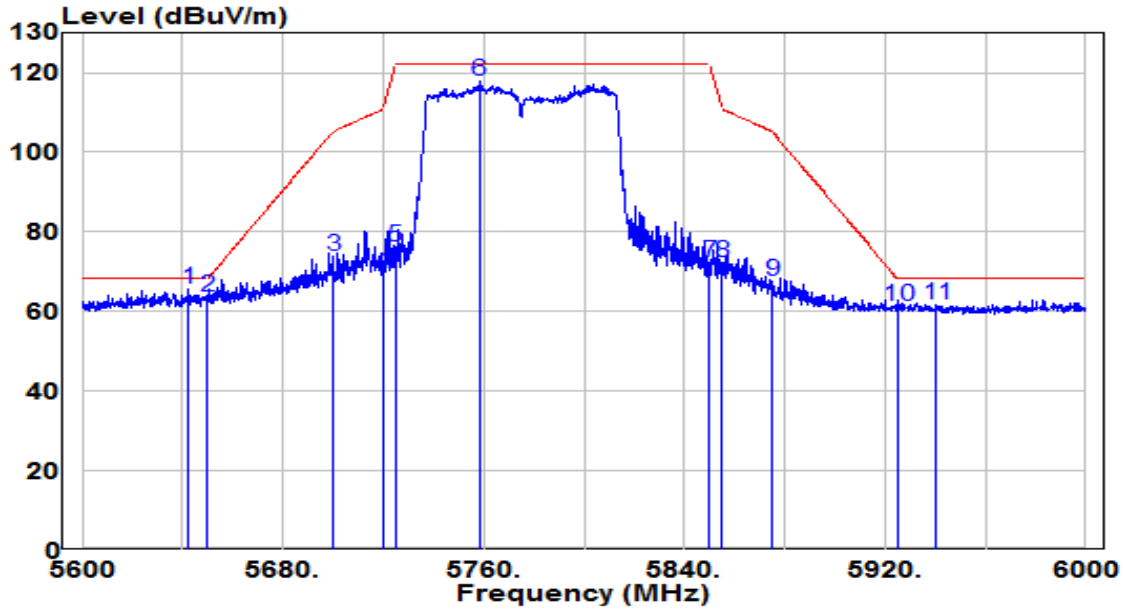


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5642.200	45.27	20.42	65.68	-2.52	68.20	Peak
2	5650.000	43.33	20.45	63.77	-4.43	68.20	Peak
3	5700.000	53.17	20.64	73.81	-31.39	105.20	Peak
4	5720.000	48.79	20.71	69.51	-41.29	110.80	Peak
5	5725.000	55.33	20.73	76.06	-46.14	122.20	Peak
6	5758.200	96.89	20.86	117.75	N/A	N/A	Peak
7	5850.000	51.23	21.21	72.44	-49.76	122.20	Peak
8	5855.000	50.86	21.23	72.09	-38.71	110.80	Peak
9	5875.000	46.12	21.31	67.43	-37.77	105.20	Peak
10	5925.000	39.98	21.50	61.48	-6.72	68.20	Peak
11	5940.400	40.27	21.56	61.83	-6.37	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C /45%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11 ac-VHT80 at channel 5775 (Beamforming Mode)	Test Voltage	230V/50Hz

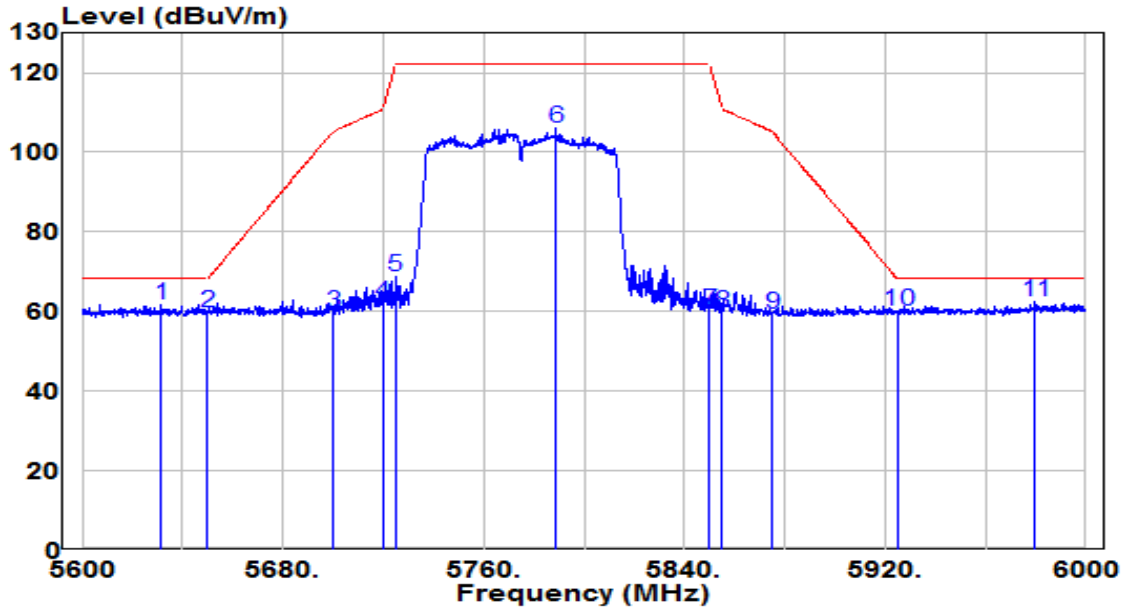


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5631.400	41.19	20.37	61.56	-6.64	68.20	Peak
2	5650.000	39.46	20.45	59.91	-8.29	68.20	Peak
3	5700.000	39.11	20.64	59.75	-45.45	105.20	Peak
4	5720.000	41.54	20.71	62.26	-48.54	110.80	Peak
5	5725.000	48.04	20.73	68.77	-53.43	122.20	Peak
6	5788.800	84.99	20.98	105.97	N/A	N/A	Peak
7	5850.000	38.93	21.21	60.14	-62.06	122.20	Peak
8	5855.000	38.38	21.23	59.61	-51.19	110.80	Peak
9	5875.000	38.07	21.31	59.38	-45.82	105.20	Peak
10	5925.000	38.41	21.50	59.91	-8.29	68.20	Peak
11	* 5979.600	40.80	21.71	62.51	-5.69	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT160 at Channel 5570MHz (Beamforming Mode)	Test Voltage	120V/60Hz

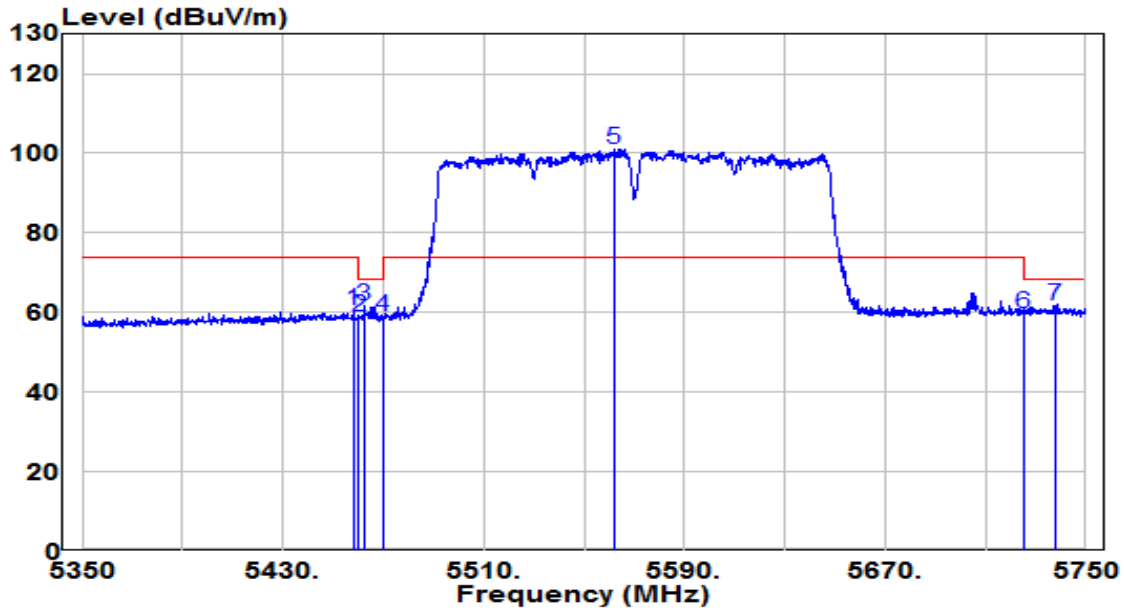


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.200	40.54	19.84	60.38	-13.62	74.00	Peak
2	5460.000	39.01	19.84	58.85	-9.35	68.20	Peak
3	5462.400	41.93	19.85	61.77	-6.43	68.20	Peak
4	5470.000	39.13	19.85	58.98	-9.22	68.20	Peak
5 *	5562.000	81.03	20.11	101.14	N/A	N/A	Peak
6	5725.000	39.00	20.73	59.74	-8.46	68.20	Peak
7	5737.800	40.89	20.78	61.67	-6.53	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT160 at Channel 5570MHz (Beamforming Mode)	Test Voltage	120V/60Hz

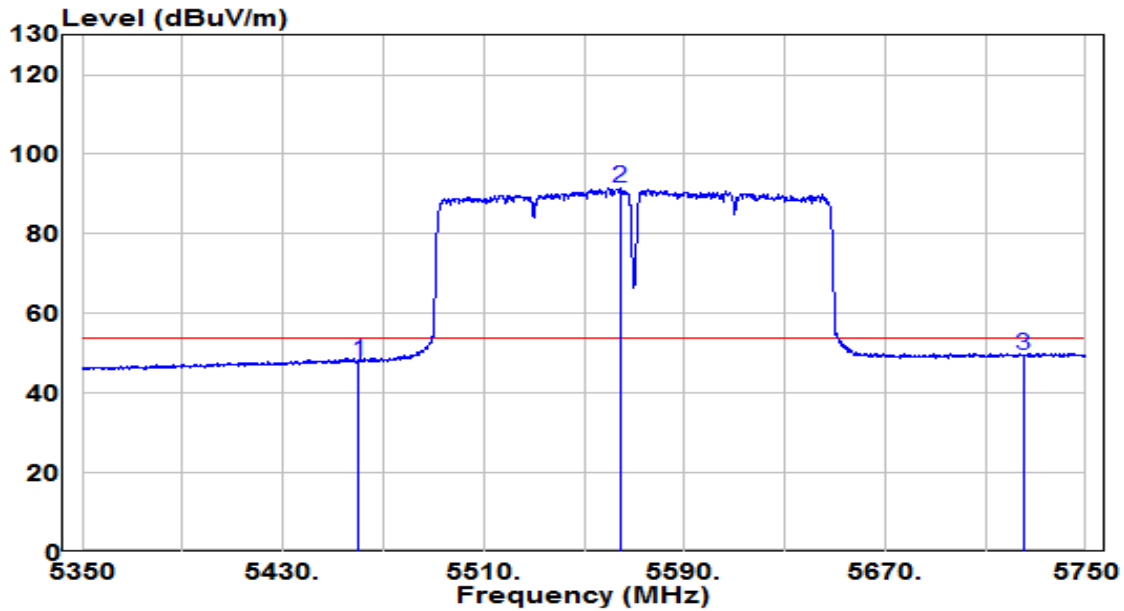


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	28.18	19.84	48.02	-5.98	54.00	Average
2	* 5564.400	71.29	20.12	91.41	N/A	N/A	Average
3	5725.000	28.89	20.73	49.62	-4.38	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT160 at Channel 5570MHz (Beamforming Mode)	Test Voltage	120V/60Hz

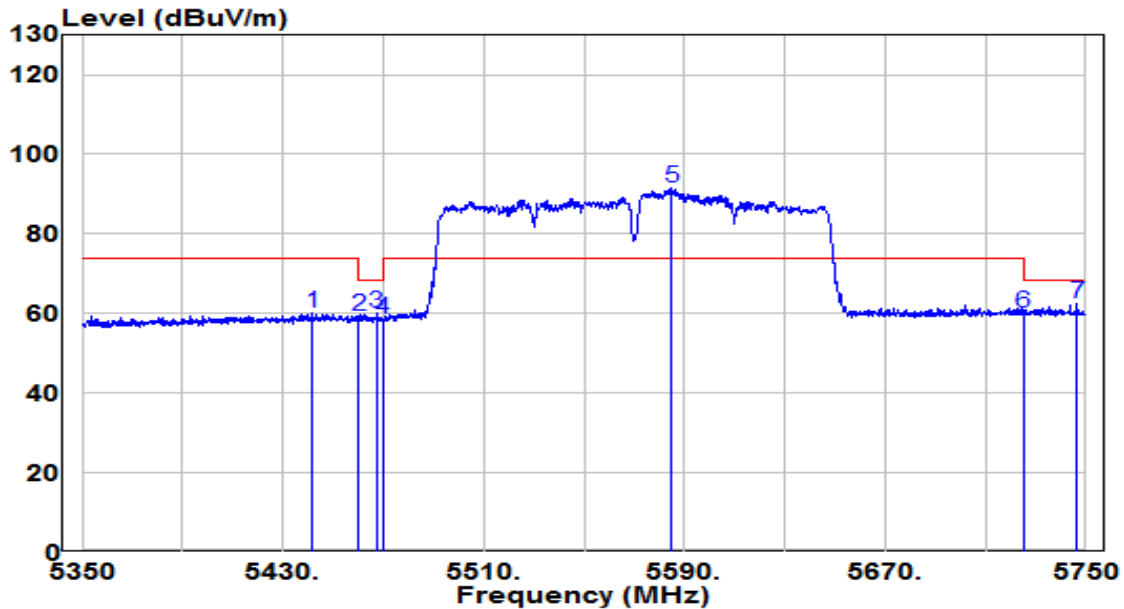


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5441.600	40.16	19.83	59.99	-14.01	74.00	Peak
2	5460.000	39.50	19.84	59.34	-8.86	68.20	Peak
3	5467.400	40.09	19.85	59.94	-8.26	68.20	Peak
4	5470.000	38.72	19.85	58.57	-9.63	68.20	Peak
5	* 5584.800	71.14	20.20	91.34	N/A	N/A	Peak
6	5725.000	39.24	20.73	59.97	-8.23	68.20	Peak
7	5746.600	41.52	20.82	62.34	-5.86	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ac-VHT160 at Channel 5570MHz (Beamforming Mode)	Test Voltage	120V/60Hz

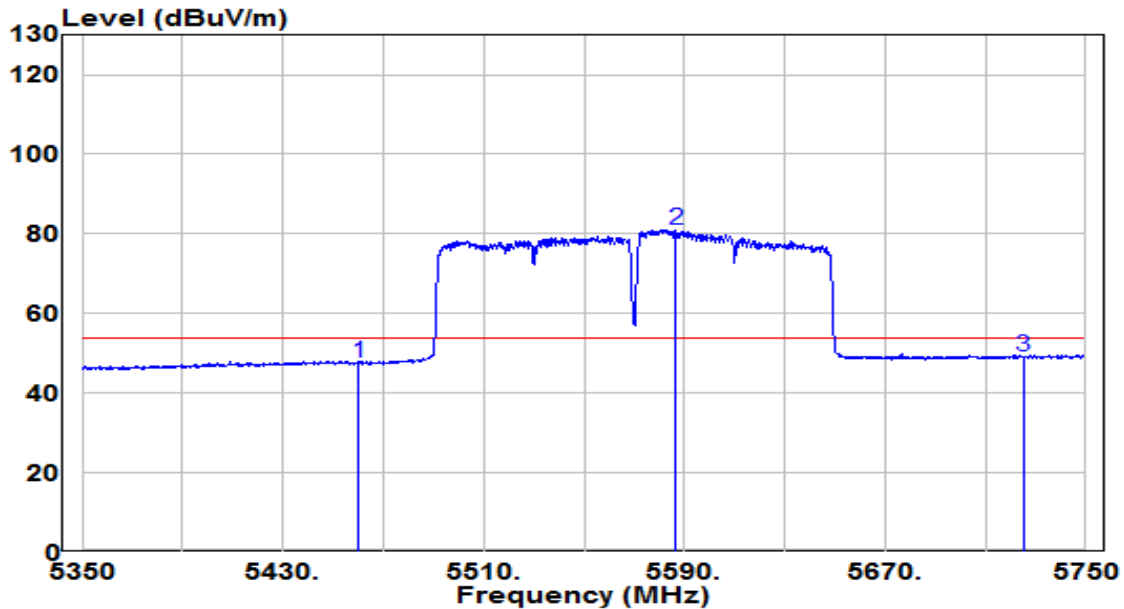


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	27.76	19.84	47.60	-6.40	54.00	Average
2	* 5586.600	60.84	20.20	81.04	N/A	N/A	Average
3	5725.000	28.41	20.73	49.14	-4.86	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C /45%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11 ax-HE20 at channel 5180 (Beamforming Mode)	Test Voltage	230V/50Hz

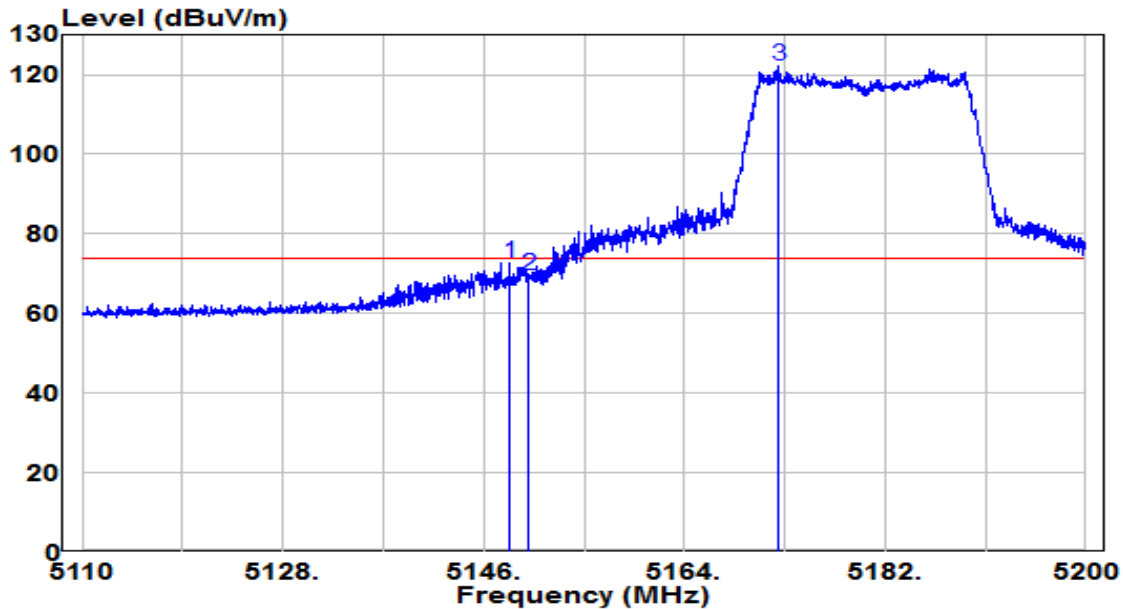


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.340	53.12	19.65	72.76	-1.24	74.00	Peak
2	5150.000	49.81	19.65	69.46	-4.54	74.00	Peak
3	* 5172.460	102.66	19.66	122.32	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C /45%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11 ax-HE20 at channel 5180 (Beamforming Mode)	Test Voltage	230V/50Hz

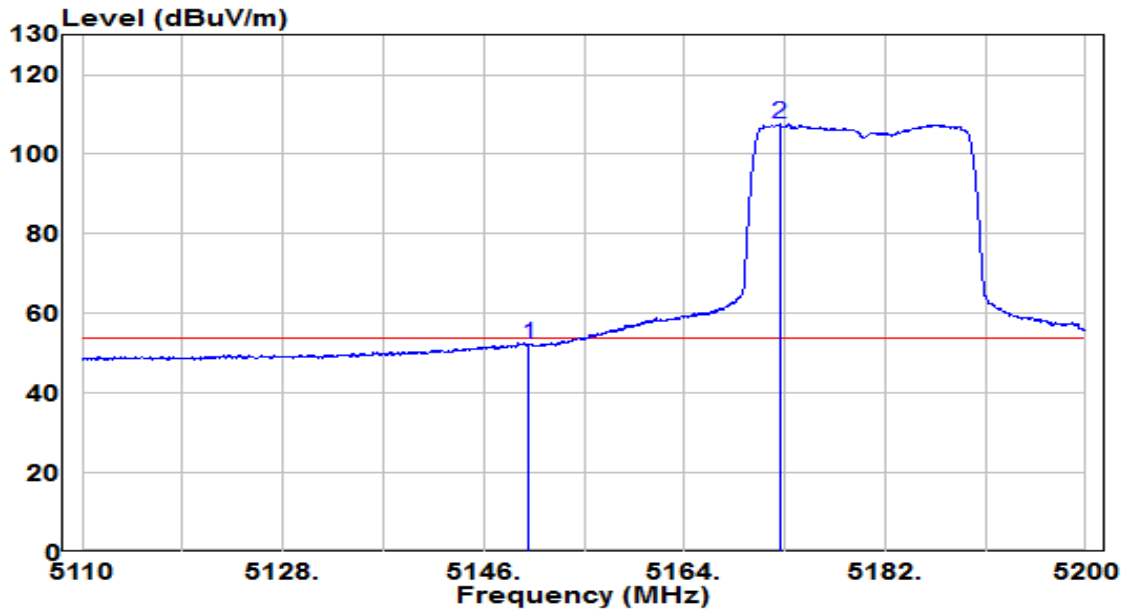


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	32.55	19.65	52.20	-1.80	54.00	Average
2	* 5172.550	87.91	19.66	107.57	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C /45%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11 ax-HE20 at channel 5180 (Beamforming Mode)	Test Voltage	230V/50Hz

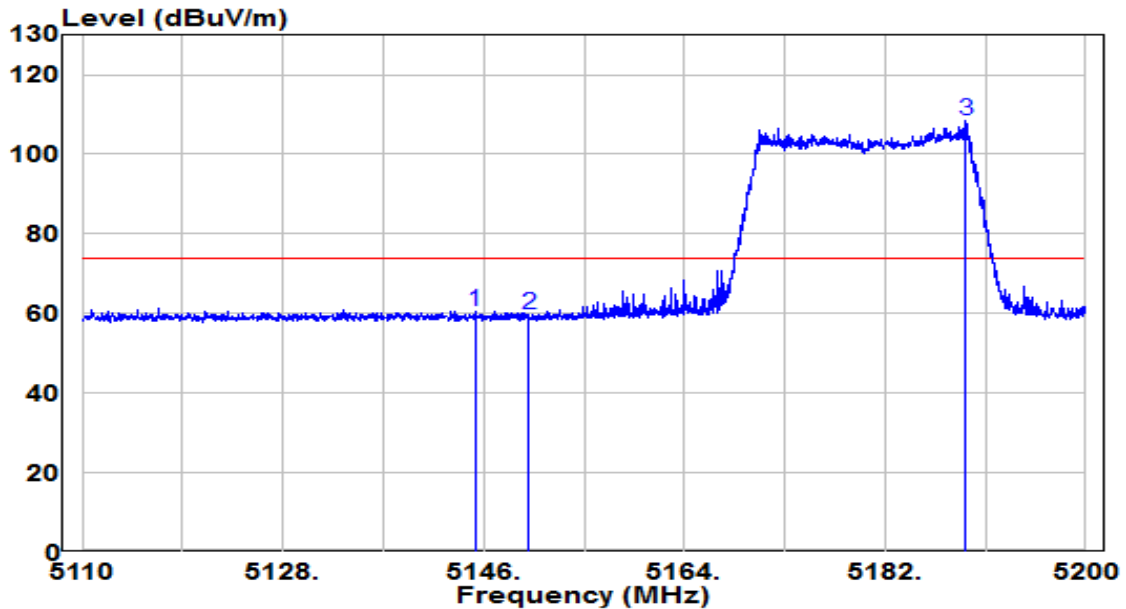


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5145.280	41.03	19.64	60.67	-13.33	74.00	Peak
2	5150.000	39.88	19.65	59.52	-14.48	74.00	Peak
3	* 5189.245	88.86	19.67	108.53	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C /45%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11 ax-HE20 at channel 5180 (Beamforming Mode)	Test Voltage	230V/50Hz

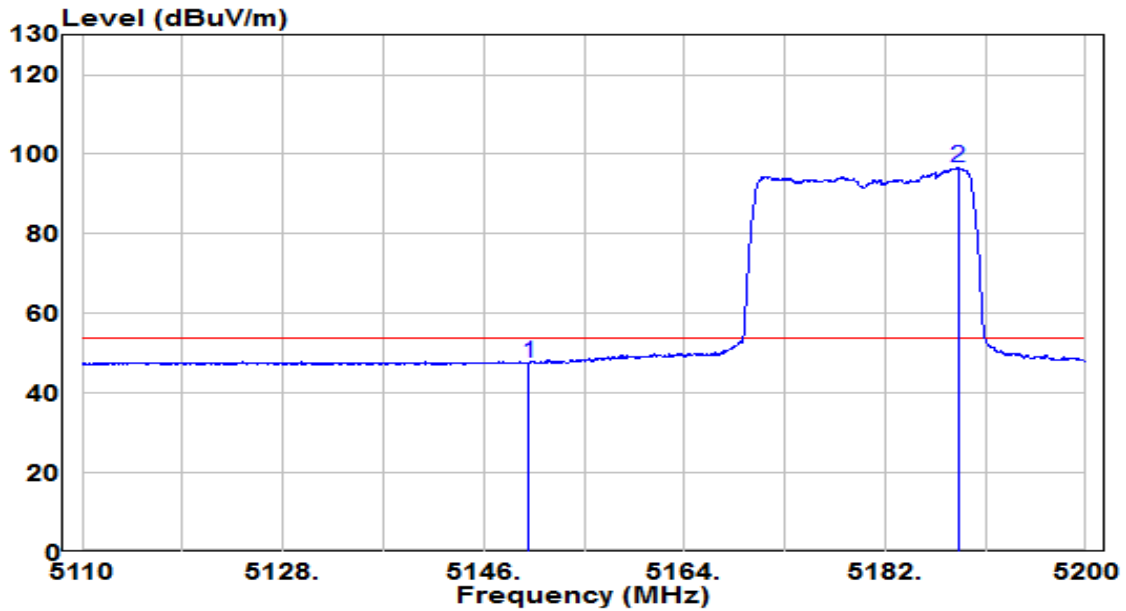


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	27.92	19.65	47.57	-6.43	54.00	Average
2	* 5188.570	76.90	19.67	96.58	N/A	N/A	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500MHz (Beamforming Mode)	Test Voltage	120V/60Hz

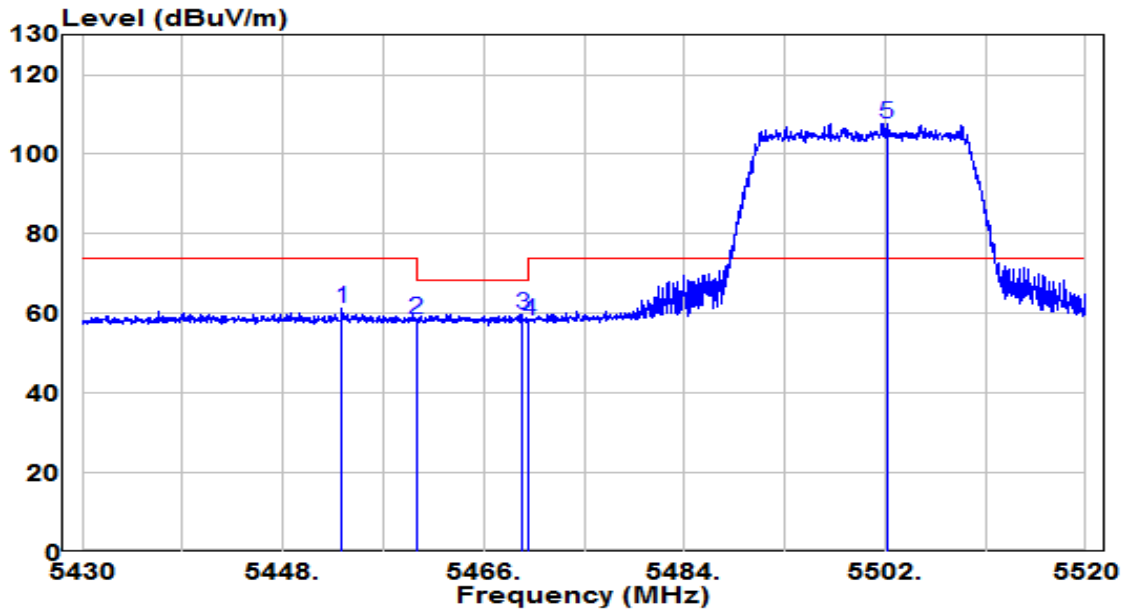


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5453.310	41.29	19.84	61.13	-12.87	74.00	Peak
2	5460.000	38.77	19.84	58.61	-9.59	68.20	Peak
3	5469.465	40.00	19.85	59.85	-8.35	68.20	Peak
4	5470.000	38.36	19.85	58.21	-9.99	68.20	Peak
5	* 5502.135	87.65	19.89	107.53	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500MHz (Beamforming Mode)	Test Voltage	120V/60Hz

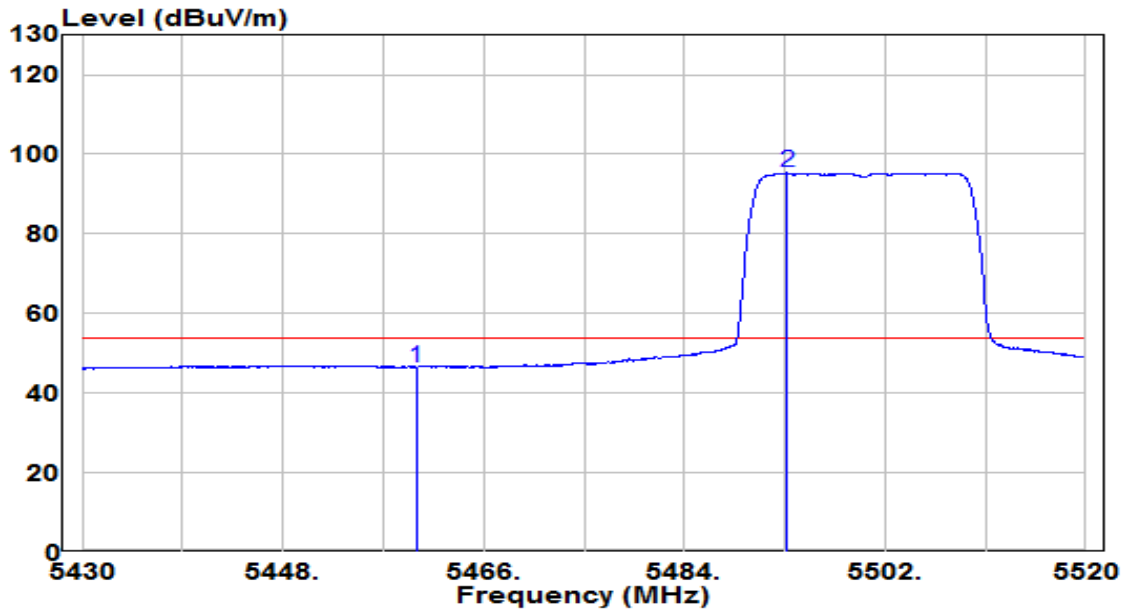


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	26.59	19.84	46.44	-7.56	54.00	Average
2	* 5493.180	75.39	19.87	95.26	N/A	N/A	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500MHz (Beamforming Mode)	Test Voltage	120V/60Hz

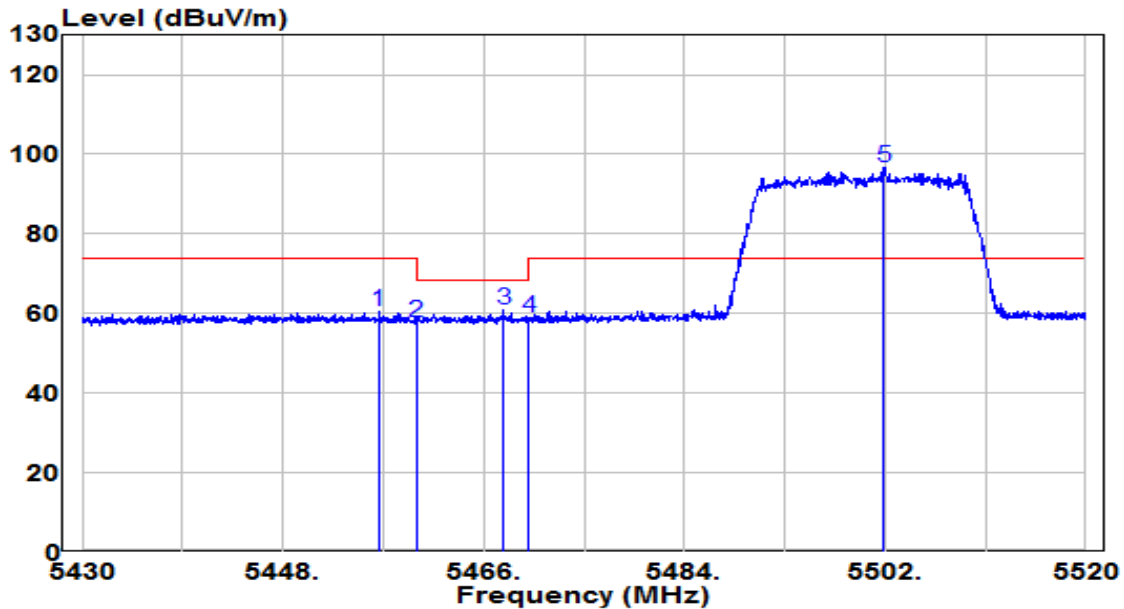


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5456.595	40.70	19.84	60.54	-13.46	74.00	Peak
2	5460.000	37.83	19.84	57.67	-10.53	68.20	Peak
3	5467.755	40.96	19.85	60.81	-7.39	68.20	Peak
4	5470.000	39.11	19.85	58.96	-9.24	68.20	Peak
5	* 5501.910	76.89	19.88	96.77	N/A	N/A	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500MHz (Beamforming Mode)	Test Voltage	120V/60Hz

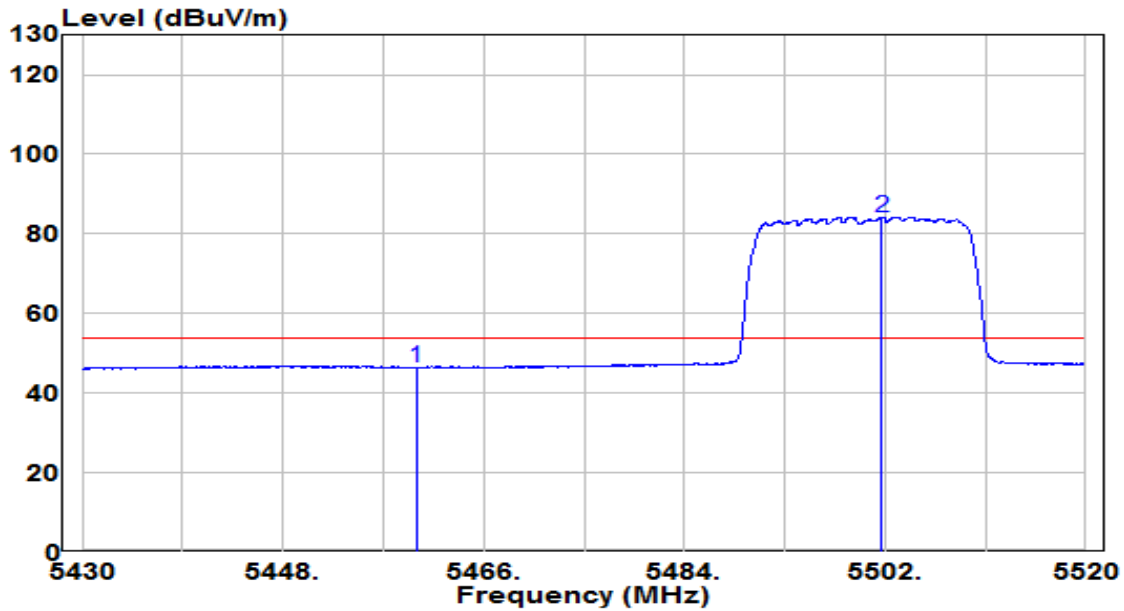


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	26.59	19.84	46.43	-7.57	54.00	Average
2	* 5501.730	64.36	19.88	84.25	N/A	N/A	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at Channel 5700MHz (Beamforming Mode)	Test Voltage	120V/60Hz

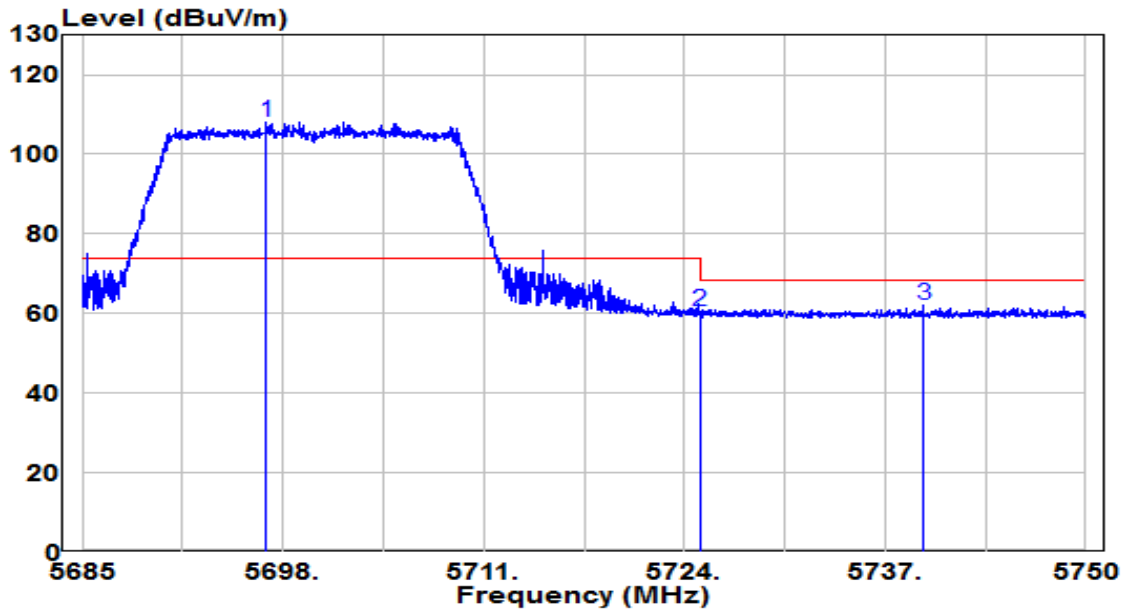


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5696.928	87.53	20.63	108.16	N/A	N/A	Peak
2	5725.000	39.81	20.73	60.54	-7.66	68.20	Peak
3	5739.470	41.11	20.79	61.90	-6.30	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE20 at Channel 5700MHz (Beamforming Mode)	Test Voltage	120V/60Hz

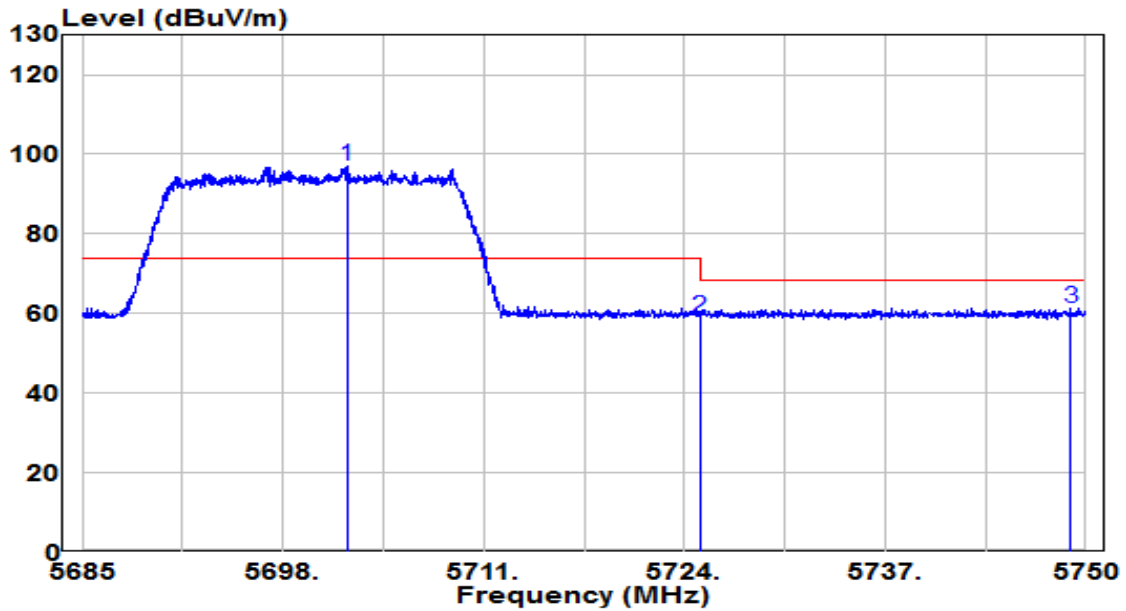


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5702.127	76.37	20.65	97.02	N/A	N/A	Peak
2	5725.000	38.13	20.73	58.86	-9.34	68.20	Peak
3	5748.993	40.63	20.83	61.46	-6.74	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C /45%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11 ax-HE20 at channel 5745 (Beamforming Mode)	Test Voltage	230V/50Hz

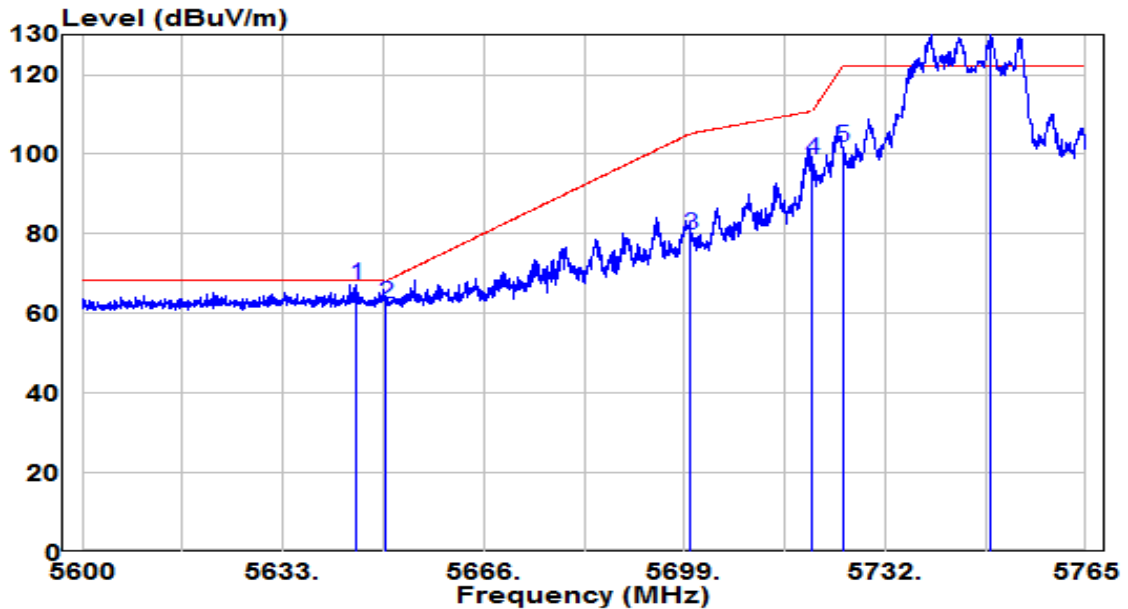


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5645.127	46.92	20.43	67.35	-0.85	68.20	Peak
2	5650.000	41.97	20.45	62.42	-5.78	68.20	Peak
3	5700.000	59.21	20.64	79.85	-25.35	105.20	Peak
4	5720.000	77.83	20.71	98.54	-12.26	110.80	Peak
5	5725.000	81.03	20.73	101.76	-20.44	122.20	Peak
6	* 5749.243	109.77	20.83	130.60	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C /45%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11 ax-HE20 at channel 5745 (Beamforming Mode)	Test Voltage	230V/50Hz

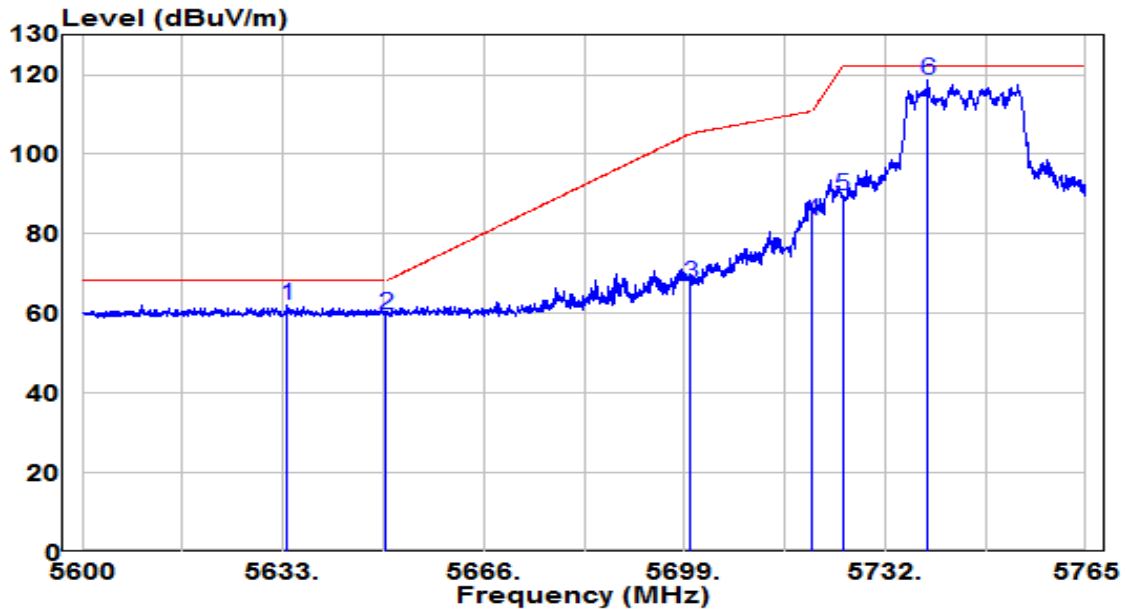


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5633.660	41.52	20.38	61.90	-6.30	68.20	Peak
2	5650.000	39.26	20.45	59.71	-8.49	68.20	Peak
3	5700.000	46.93	20.64	67.56	-37.64	105.20	Peak
4	5720.000	62.59	20.71	83.30	-27.50	110.80	Peak
5	5725.000	68.67	20.73	89.40	-32.80	122.20	Peak
6	* 5739.095	97.67	20.79	118.46	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C /45%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11 ax-HE20 at channel 5825 (Beamforming Mode)	Test Voltage	230V/50Hz

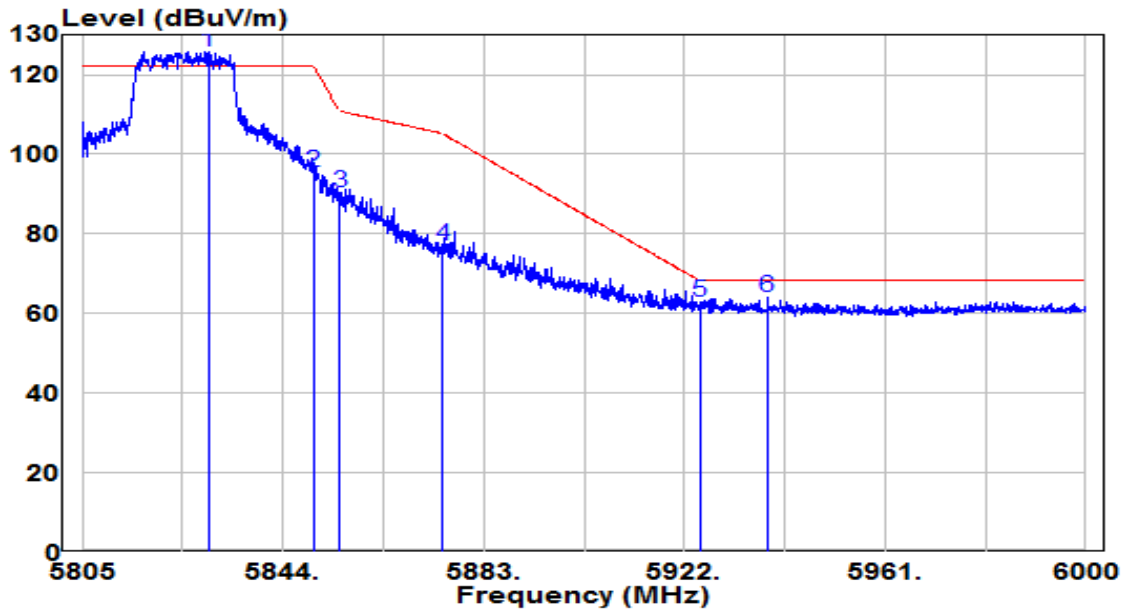


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5829.570	104.69	21.14	125.83	N/A	N/A	Peak
2	5850.000	74.14	21.21	95.35	-26.85	122.20	Peak
3	5855.000	69.31	21.23	90.54	-20.26	110.80	Peak
4	5875.000	55.57	21.31	76.88	-28.32	105.20	Peak
5	5925.000	41.21	21.50	62.71	-5.49	68.20	Peak
6	5938.087	42.46	21.55	64.02	-4.18	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C /45%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11 ax-HE20 at channel 5825 (Beamforming Mode)	Test Voltage	230V/50Hz

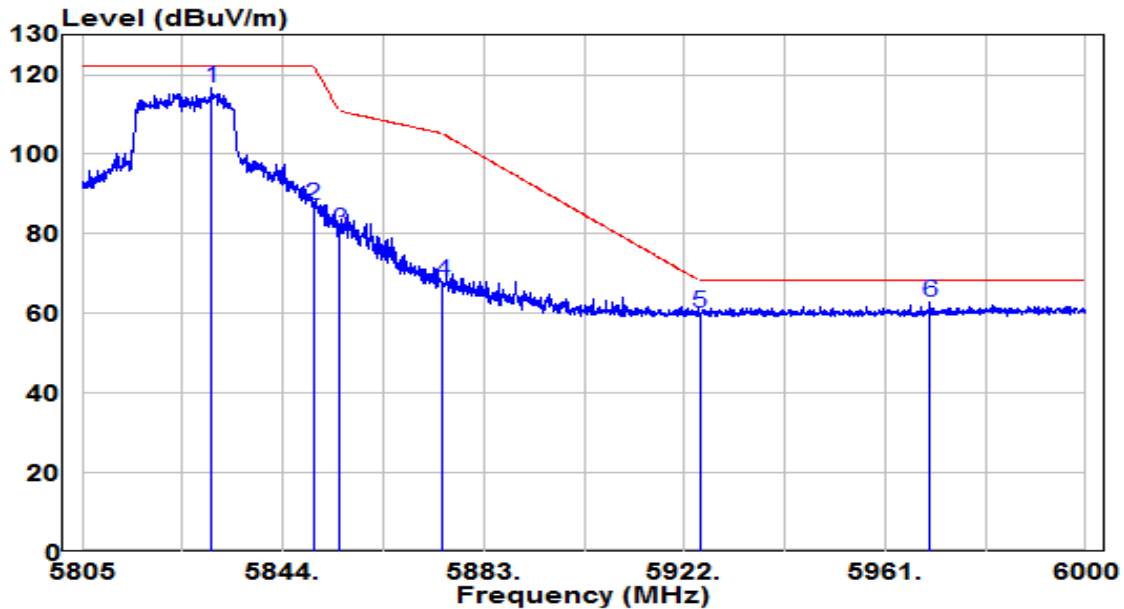


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5830.058	95.72	21.14	116.86	N/A	N/A	Peak
2	5850.000	66.07	21.21	87.28	-34.92	122.20	Peak
3	5855.000	59.69	21.23	80.92	-29.88	110.80	Peak
4	5875.000	46.81	21.31	68.12	-37.08	105.20	Peak
5	5925.000	38.73	21.50	60.23	-7.97	68.20	Peak
6	5969.775	41.04	21.67	62.72	-5.48	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C /45%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11 ax-HE40 at channel 5190 (Beamforming Mode)	Test Voltage	230V/50Hz

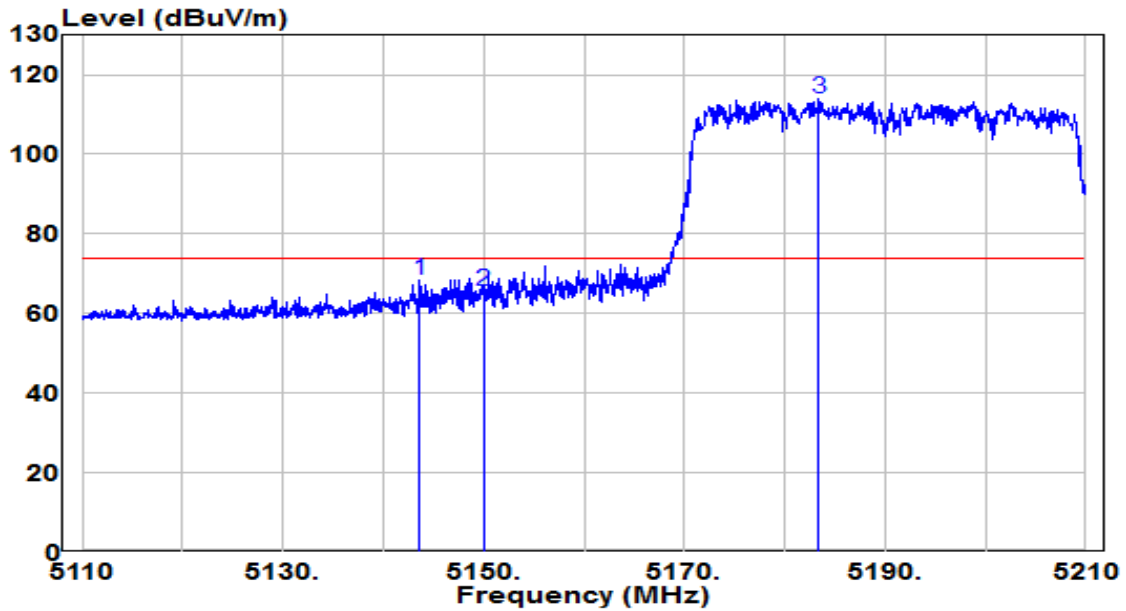


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5143.600	48.83	19.64	68.47	-5.53	74.00	Peak
2	5150.000	45.88	19.65	65.53	-8.47	74.00	Peak
3	* 5183.350	94.41	19.67	114.07	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C /45%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11 ax-HE40 at channel 5190 (Beamforming Mode)	Test Voltage	230V/50Hz

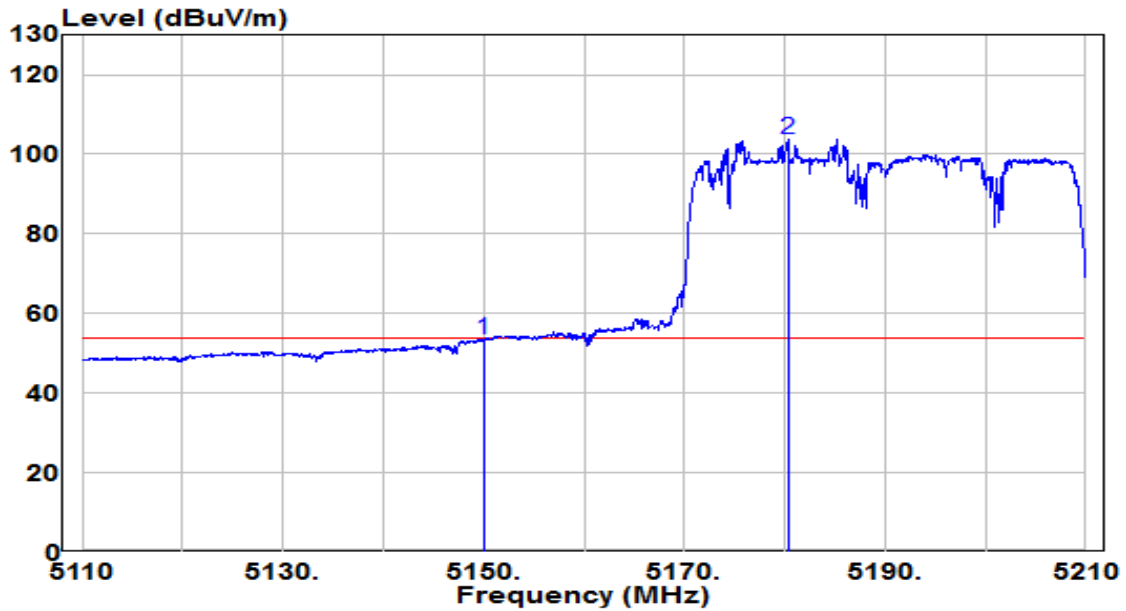


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	33.73	19.65	53.38	-0.62	54.00	Average
2	* 5180.350	83.87	19.67	103.54	N/A	N/A	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C /45%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11 ax-HE40 at channel 5190 (Beamforming Mode)	Test Voltage	230V/50Hz

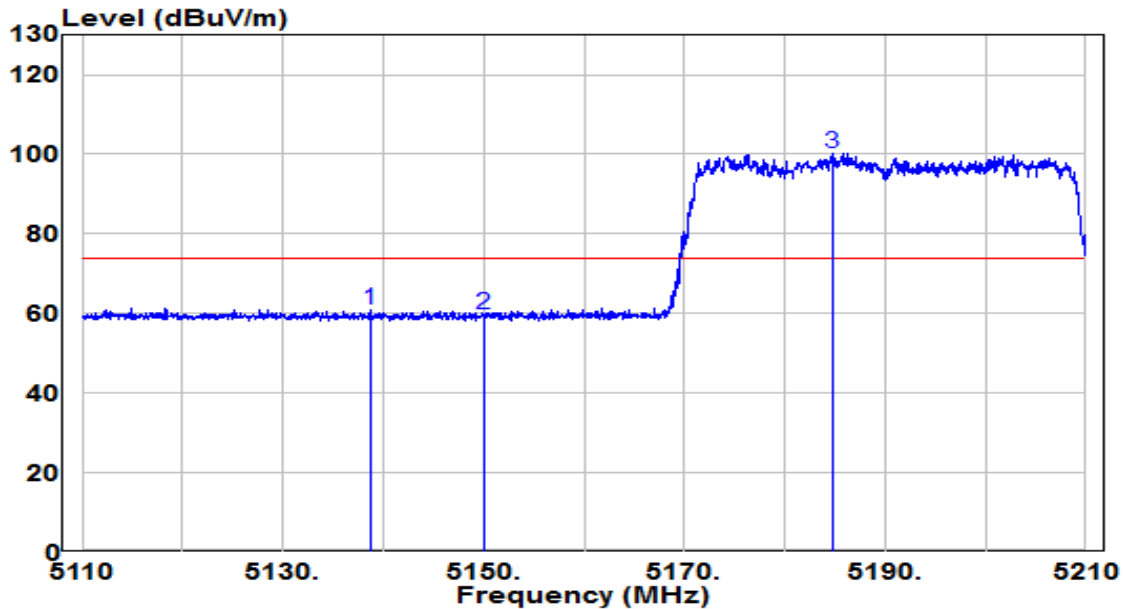


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5138.650	41.12	19.64	60.76	-13.24	74.00	Peak
2	5150.000	39.91	19.65	59.56	-14.44	74.00	Peak
3	* 5184.700	80.50	19.67	100.17	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C /45%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11 ax-HE40 at channel 5190 (Beamforming Mode)	Test Voltage	230V/50Hz

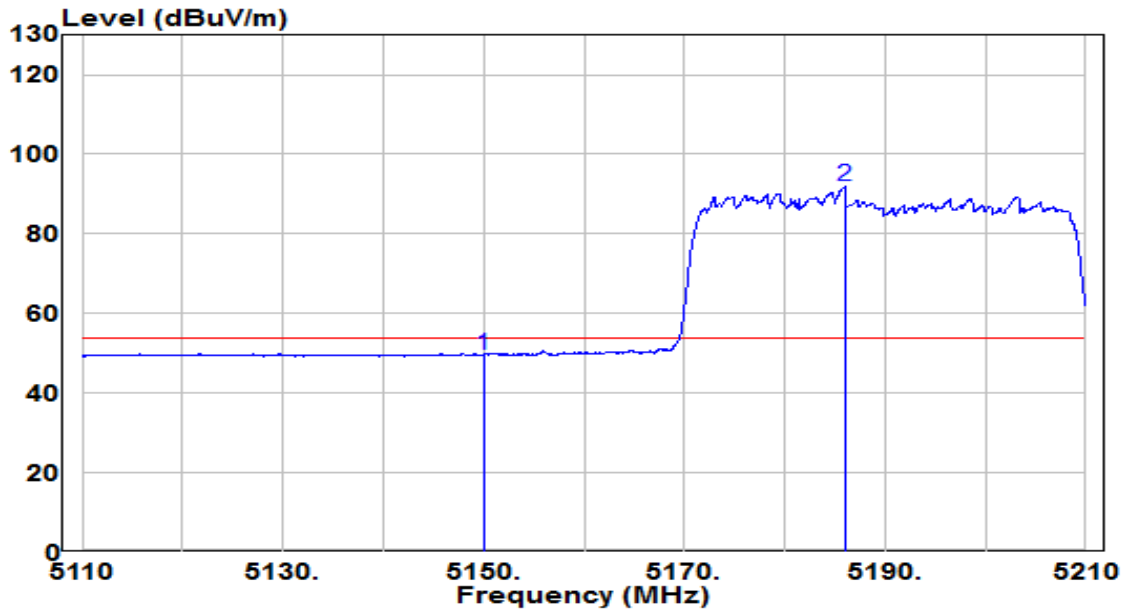


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	30.01	19.65	49.66	-4.34	54.00	Average
2	* 5185.950	72.08	19.67	91.75	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at Channel 5510MHz (Beamforming Mode)	Test Voltage	120V/60Hz

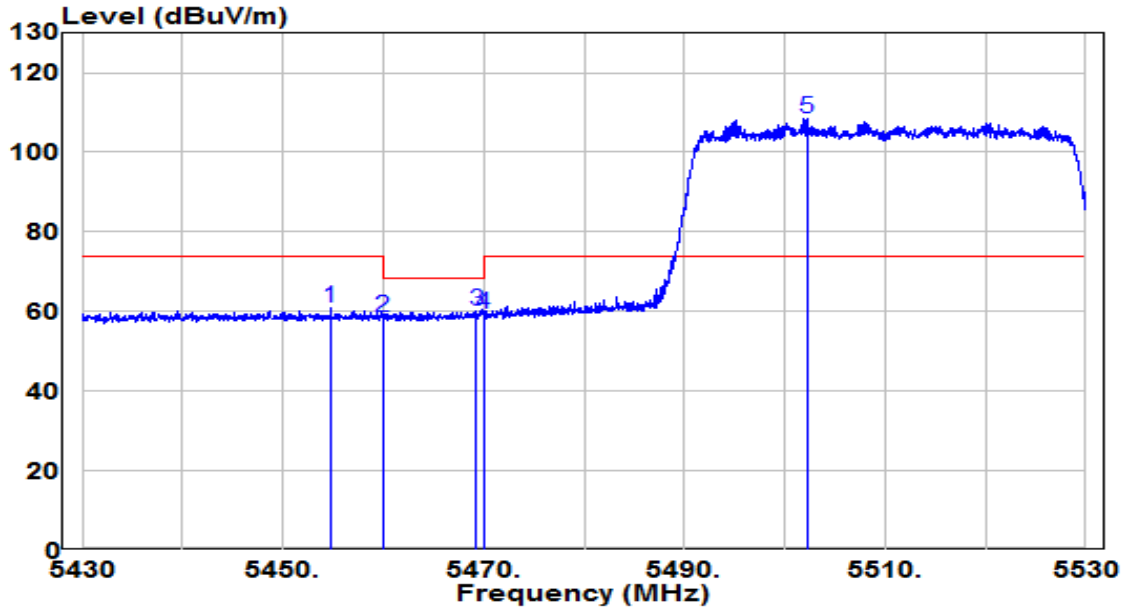


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5454.750	40.90	19.84	60.75	-13.25	74.00	Peak
2	5460.000	38.81	19.84	58.65	-9.55	68.20	Peak
3	5469.250	40.27	19.85	60.12	-8.08	68.20	Peak
4	5470.000	39.67	19.85	59.52	-8.68	68.20	Peak
5	* 5502.250	88.37	19.89	108.25	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at Channel 5510MHz (Beamforming Mode)	Test Voltage	120V/60Hz

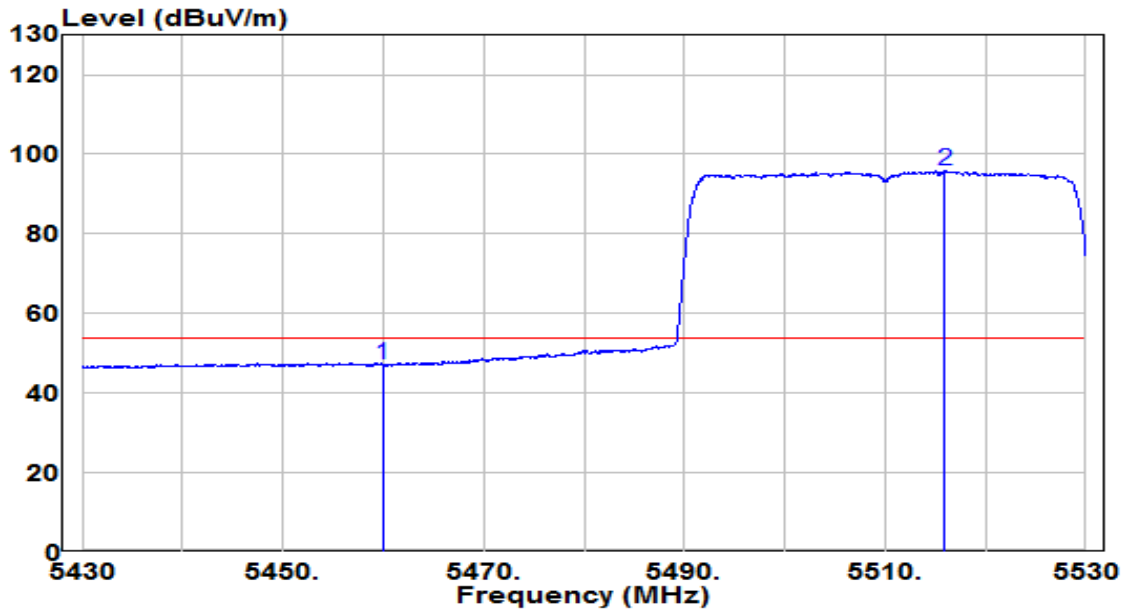


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	27.42	19.84	47.26	-6.74	54.00	Average
2	* 5515.950	75.85	19.93	95.78	N/A	N/A	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at Channel 5510MHz (Beamforming Mode)	Test Voltage	120V/60Hz

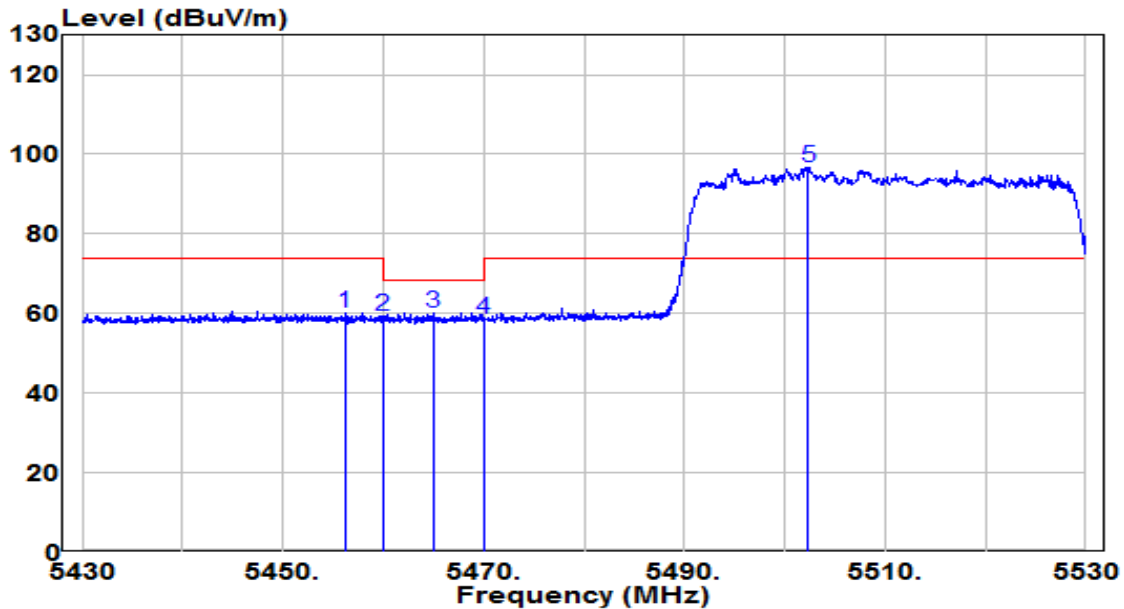


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5456.150	40.44	19.84	60.28	-13.72	74.00	Peak
2	5460.000	39.57	19.84	59.41	-8.79	68.20	Peak
3	5465.000	40.26	19.85	60.10	-8.10	68.20	Peak
4	5470.000	38.61	19.85	58.46	-9.74	68.20	Peak
5	* 5502.300	76.86	19.89	96.75	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at Channel 5510MHz (Beamforming Mode)	Test Voltage	120V/60Hz

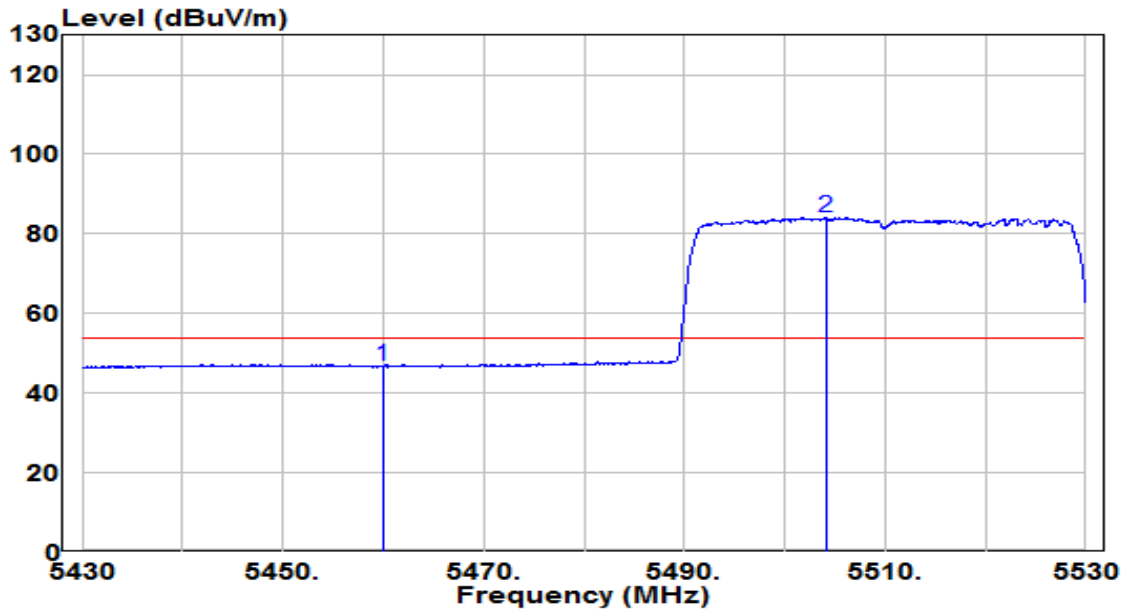


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	26.86	19.84	46.70	-7.30	54.00	Average
2	* 5504.100	64.26	19.89	84.14	N/A	N/A	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at Channel 5670MHz (Beamforming Mode)	Test Voltage	120V/60Hz

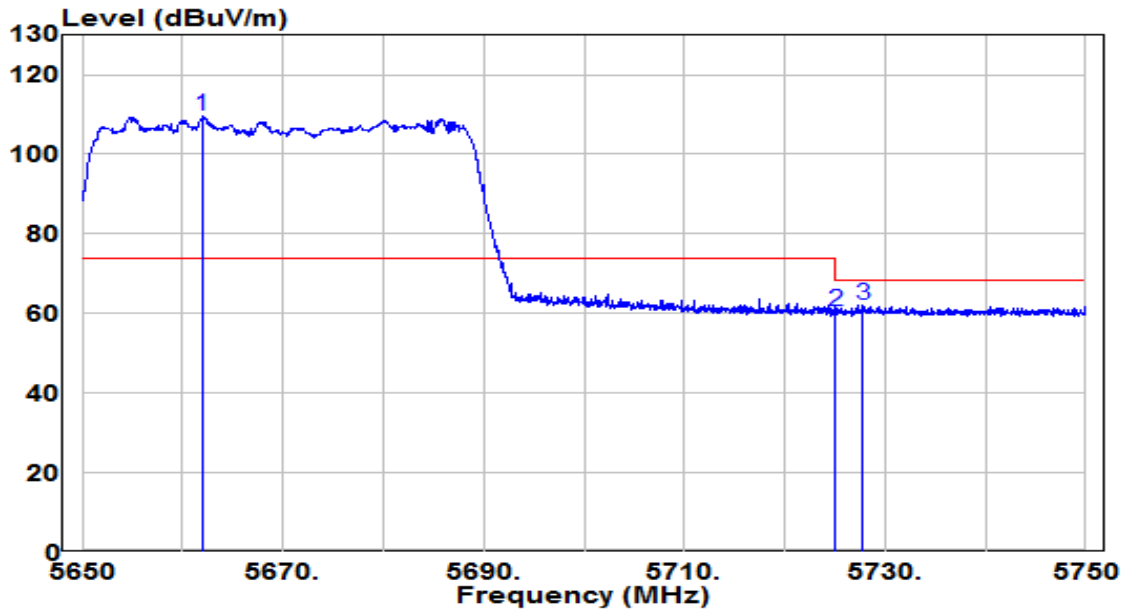


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5662.000	88.95	20.49	109.44	N/A	N/A	Peak
2	5725.000	39.85	20.73	60.58	-7.62	68.20	Peak
3	5727.750	41.42	20.74	62.16	-6.04	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE40 at Channel 5670MHz (Beamforming Mode)	Test Voltage	120V/60Hz

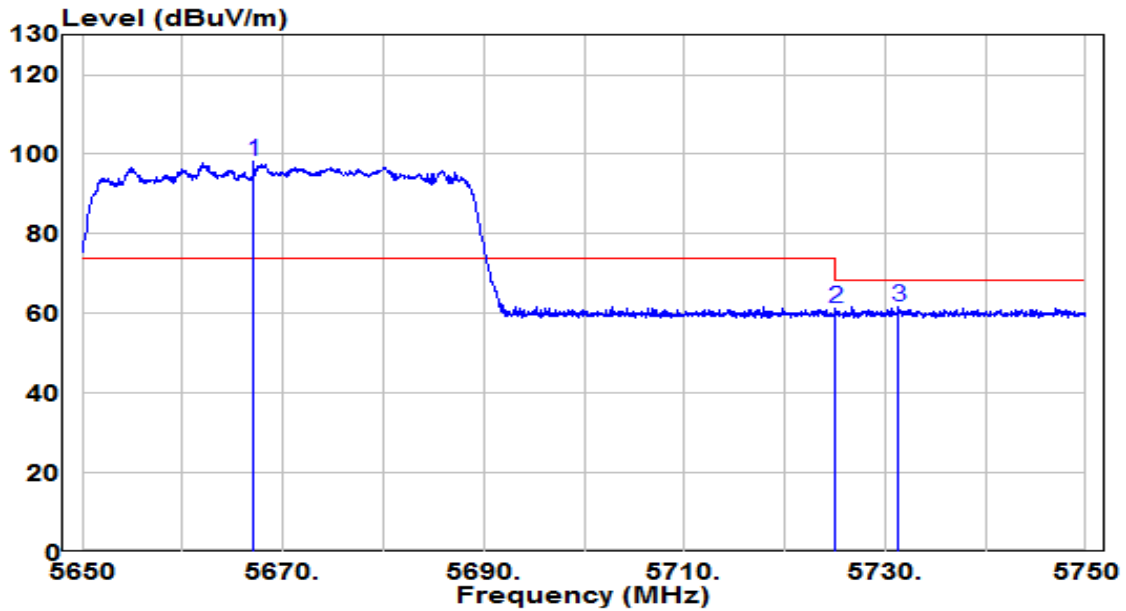


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5667.100	77.86	20.51	98.37	N/A	N/A	Peak
2	5725.000	40.53	20.73	61.26	-6.94	68.20	Peak
3	5731.350	40.81	20.76	61.57	-6.63	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C /45%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11 ax-HE40 at channel 5755 (Beamforming Mode)	Test Voltage	230V/50Hz

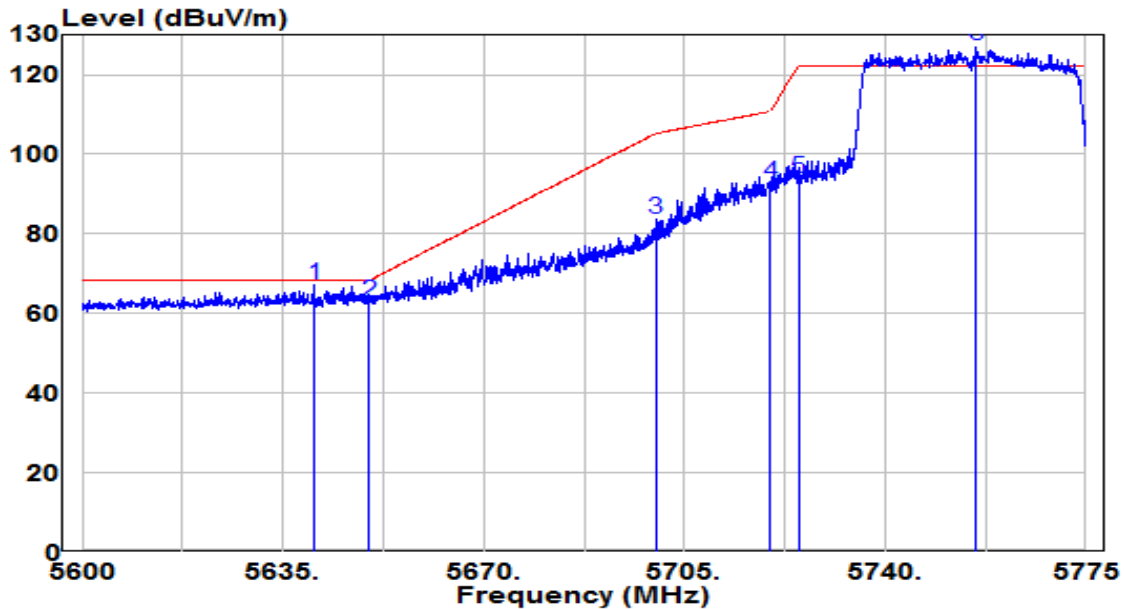


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5640.425	46.57	20.41	66.98	-1.22	68.20	Peak
2	5650.000	42.55	20.45	62.99	-5.21	68.20	Peak
3	5700.000	62.85	20.64	83.49	-21.71	105.20	Peak
4	5720.000	72.16	20.71	92.87	-17.93	110.80	Peak
5	5725.000	73.26	20.73	93.99	-28.21	122.20	Peak
6	* 5755.925	106.21	20.85	127.06	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C /45%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11 ax-HE40 at channel 5755 (Beamforming Mode)	Test Voltage	230V/50Hz

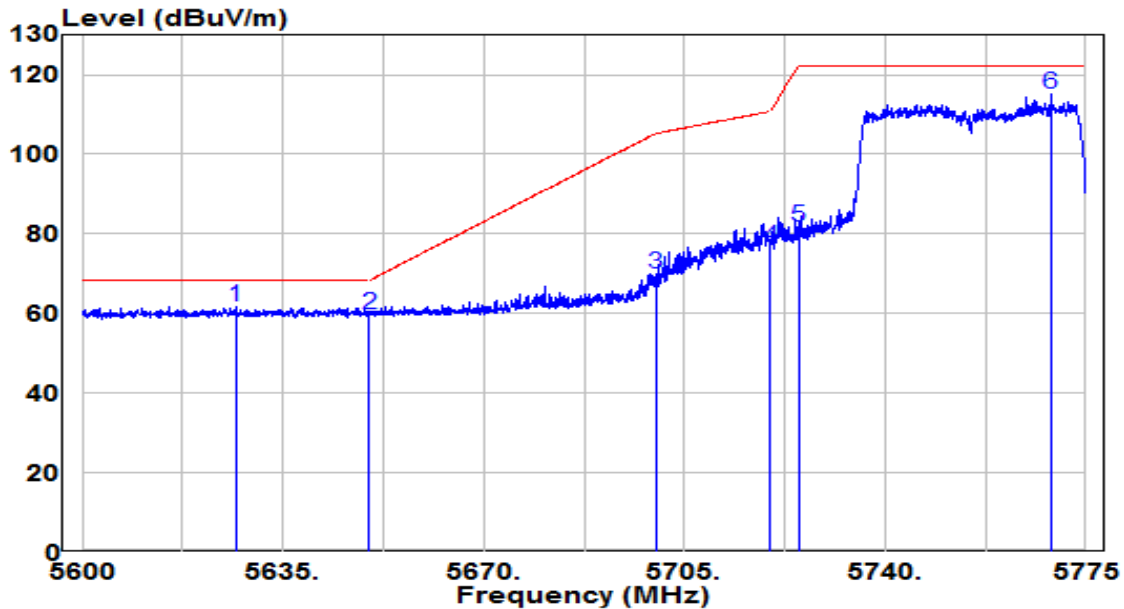


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5626.775	41.41	20.36	61.77	-6.43	68.20	Peak
2	5650.000	39.38	20.45	59.82	-8.38	68.20	Peak
3	5700.000	49.17	20.64	69.81	-35.39	105.20	Peak
4	5720.000	55.72	20.71	76.43	-34.37	110.80	Peak
5	5725.000	60.92	20.73	81.66	-40.54	122.20	Peak
6	5768.788	94.22	20.90	115.12	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C /45%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11 ax-HE40 at channel 5795 (Beamforming Mode)	Test Voltage	230V/50Hz

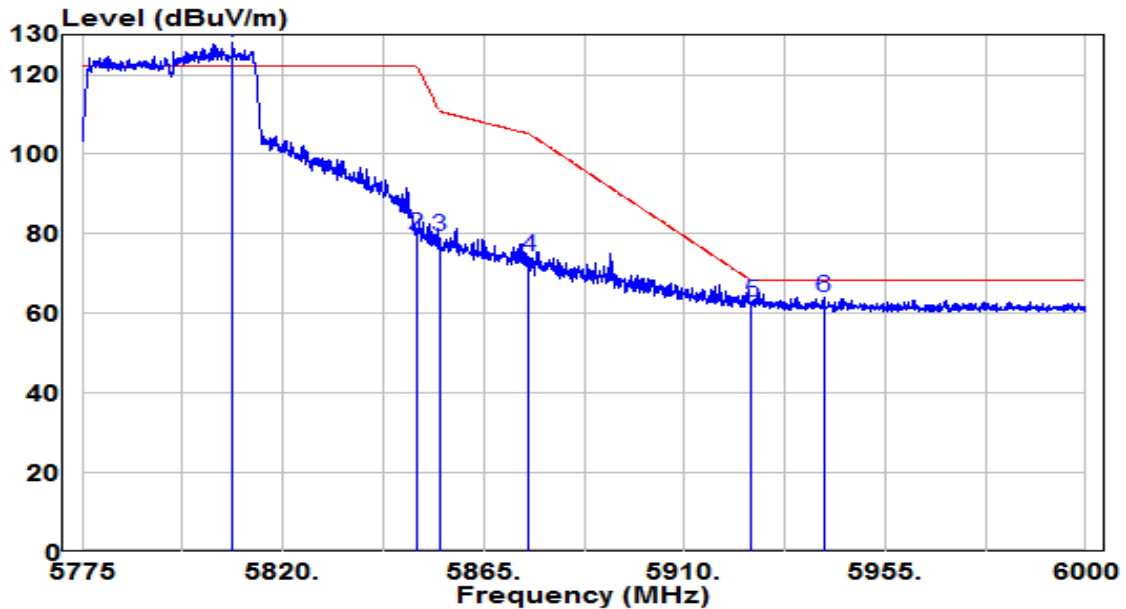


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5808.525	107.07	21.06	128.13	N/A	N/A	Peak
2	5850.000	58.38	21.21	79.59	-42.61	122.20	Peak
3	5855.000	57.97	21.23	79.21	-31.59	110.80	Peak
4	5875.000	52.77	21.31	74.08	-31.12	105.20	Peak
5	5925.000	41.34	21.50	62.84	-5.36	68.20	Peak
6	5941.163	42.61	21.56	64.18	-4.02	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C /45%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11 ax-HE40 at channel 5795 (Beamforming Mode)	Test Voltage	230V/50Hz

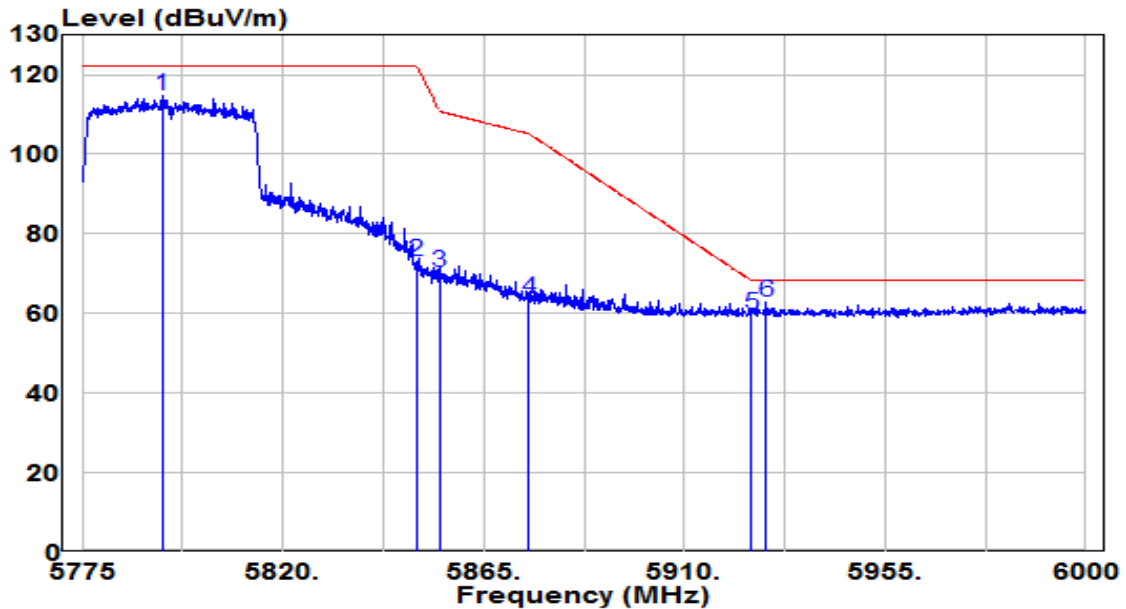


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5792.888	93.78	21.00	114.77	N/A	N/A	Peak
2	5850.000	51.86	21.21	73.07	-49.13	122.20	Peak
3	5855.000	49.01	21.23	70.24	-40.56	110.80	Peak
4	5875.000	42.49	21.31	63.80	-41.40	105.20	Peak
5	5925.000	38.14	21.50	59.64	-8.56	68.20	Peak
6	* 5928.337	41.47	21.51	62.98	-5.22	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C /45%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11 ax-HE80 at channel 5210 (Beamforming Mode)	Test Voltage	230V/50Hz

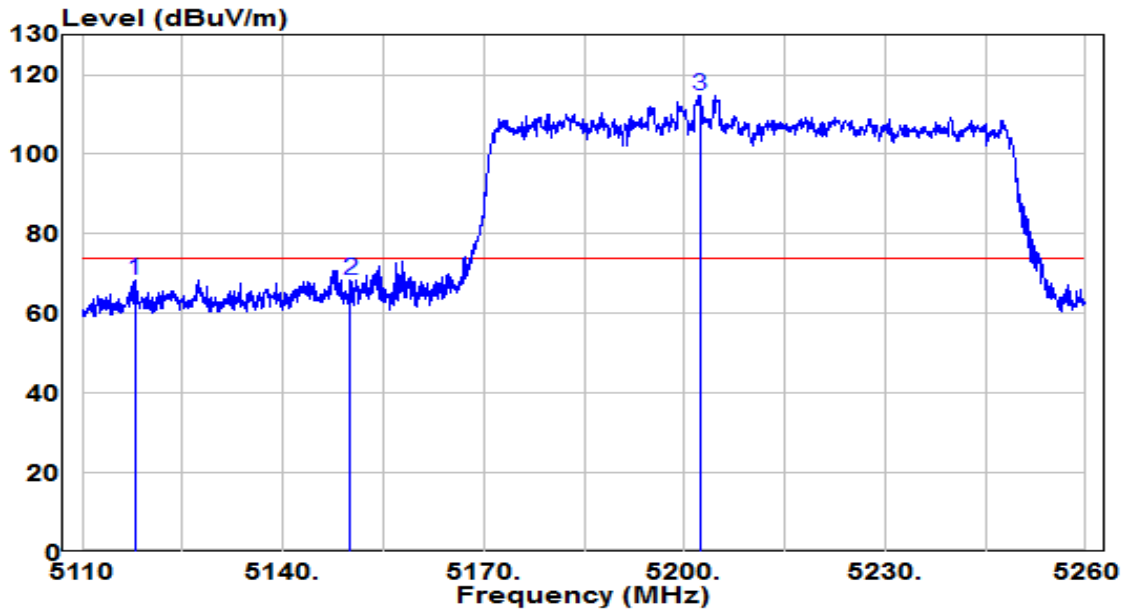


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5117.875	48.85	19.63	68.48	-5.52	74.00	Peak
2	5150.000	48.74	19.65	68.38	-5.62	74.00	Peak
3	* 5202.325	95.10	19.68	114.78	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C /45%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11 ax-HE80 at channel 5210 (Beamforming Mode)	Test Voltage	230V/50Hz

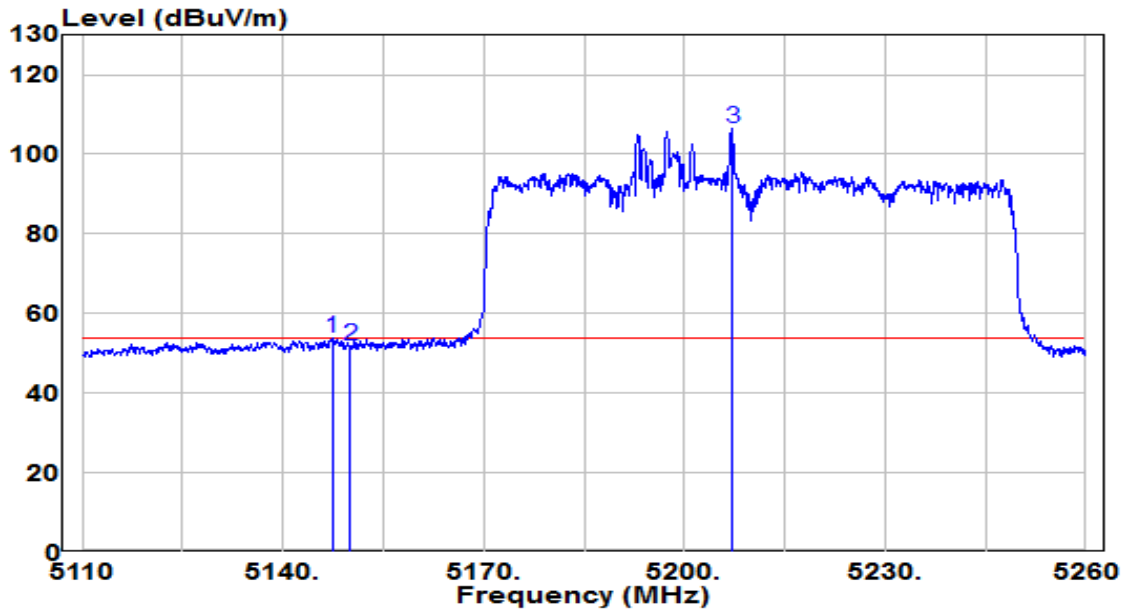


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5147.425	34.20	19.64	53.84	-0.16	54.00	Average
2	5150.000	32.16	19.65	51.81	-2.19	54.00	Average
3	* 5207.125	86.76	19.68	106.45	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C /45%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11 ax-HE80 at channel 5210 (Beamforming Mode)	Test Voltage	230V/50Hz

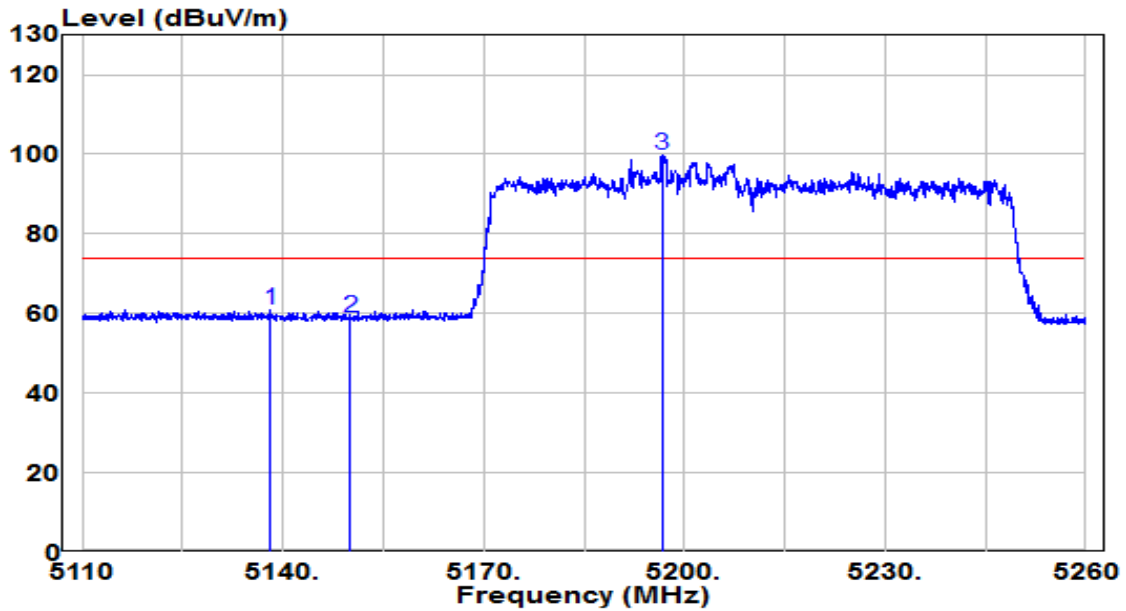


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5138.200	41.38	19.64	61.02	-12.98	74.00	Peak
2	5150.000	39.20	19.65	58.84	-15.16	74.00	Peak
3	* 5196.625	80.09	19.68	99.77	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C /45%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11 ax-HE80 at channel 5210 (Beamforming Mode)	Test Voltage	230V/50Hz

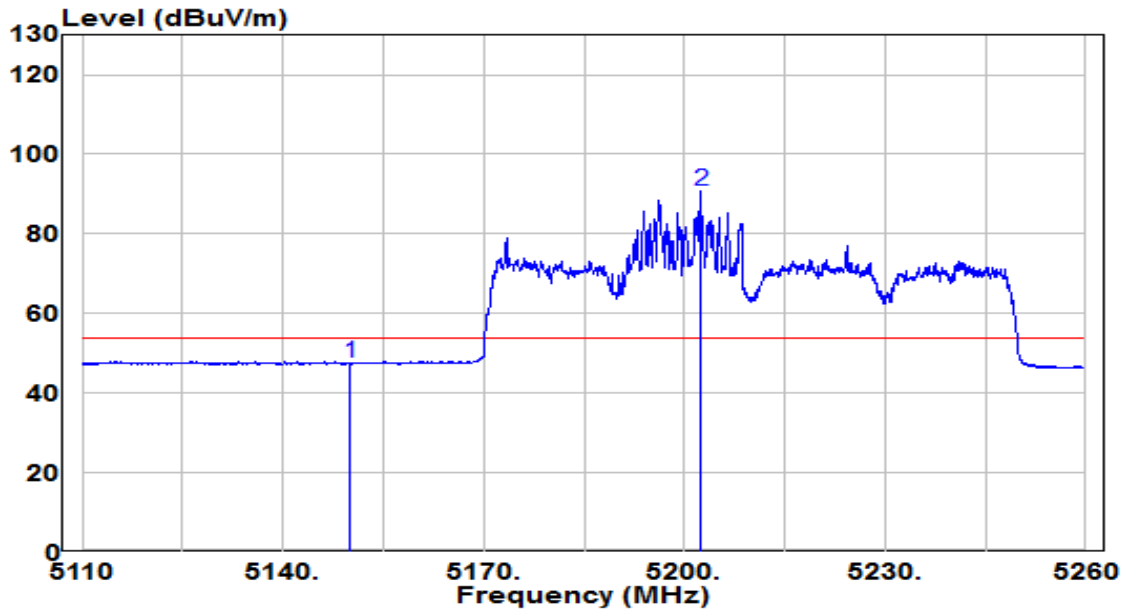


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	27.78	19.65	47.43	-6.57	54.00	Average
2	* 5202.550	71.01	19.68	90.69	N/A	N/A	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE80 at Channel 5530MHz (Beamforming Mode)	Test Voltage	120V/60Hz

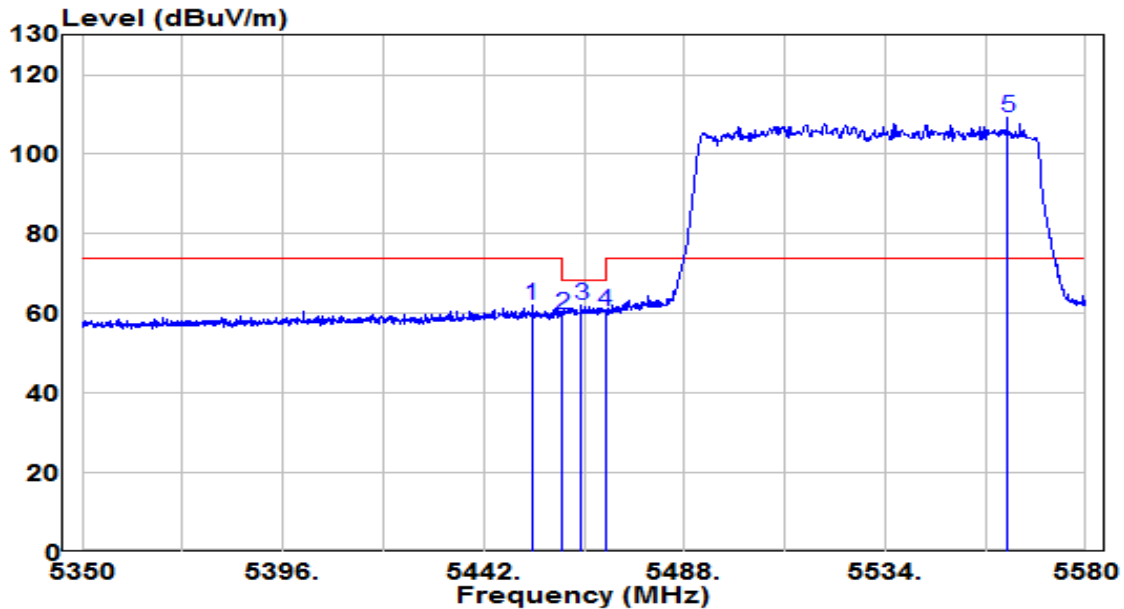


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5453.155	42.40	19.84	62.24	-11.76	74.00	Peak
2	5460.000	39.72	19.84	59.57	-8.63	68.20	Peak
3	5464.310	42.04	19.85	61.89	-6.31	68.20	Peak
4	5470.000	40.67	19.85	60.52	-7.68	68.20	Peak
5	* 5562.060	89.04	20.11	109.14	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE80 at Channel 5530MHz (Beamforming Mode)	Test Voltage	120V/60Hz

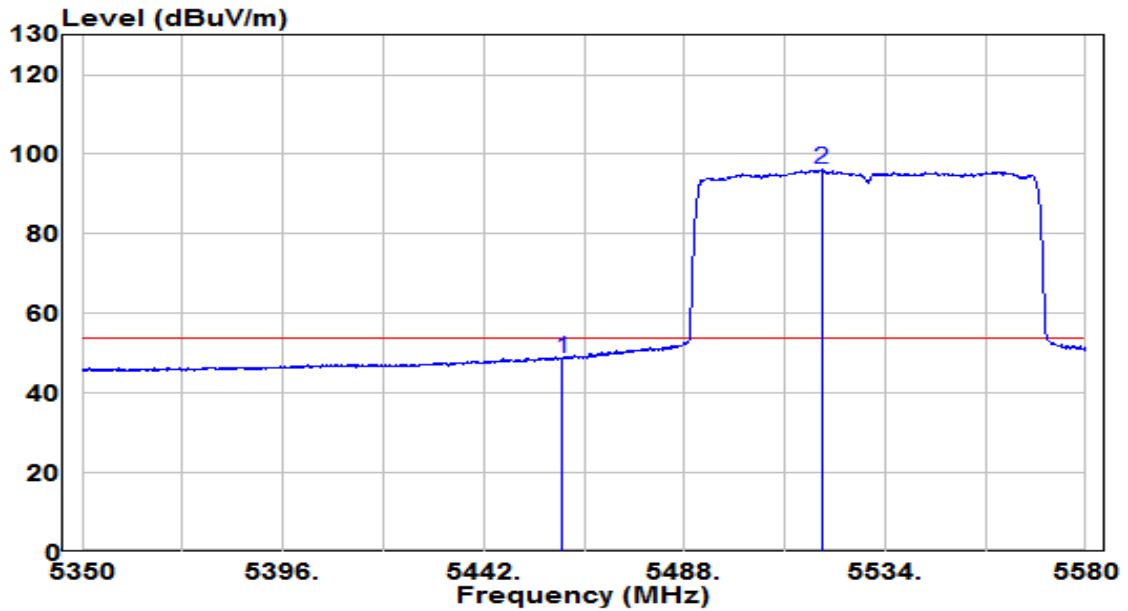


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	29.01	19.84	48.86	-5.14	54.00	Average
2	* 5519.395	76.12	19.94	96.06	N/A	N/A	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE80 at Channel 5530MHz (Beamforming Mode)	Test Voltage	120V/60Hz

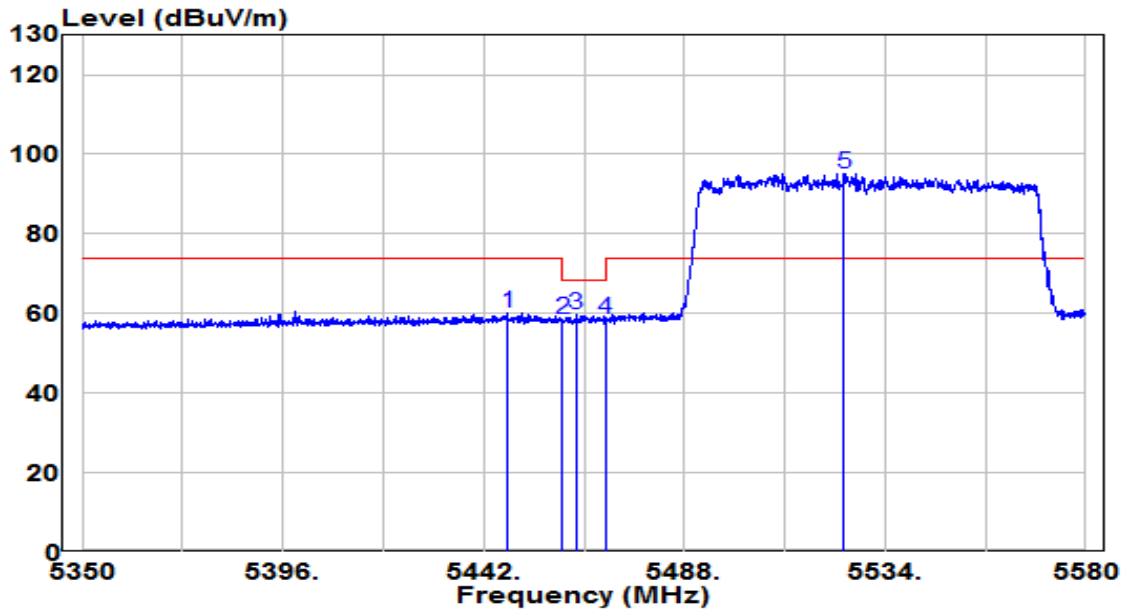


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5447.520	40.10	19.84	59.94	-14.06	74.00	Peak
2	5460.000	38.52	19.84	58.37	-9.83	68.20	Peak
3	5463.275	39.85	19.85	59.70	-8.50	68.20	Peak
4	5470.000	38.70	19.85	58.55	-9.65	68.20	Peak
5	* 5524.570	75.23	19.96	95.19	N/A	N/A	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE80 at Channel 5530MHz (Beamforming Mode)	Test Voltage	120V/60Hz

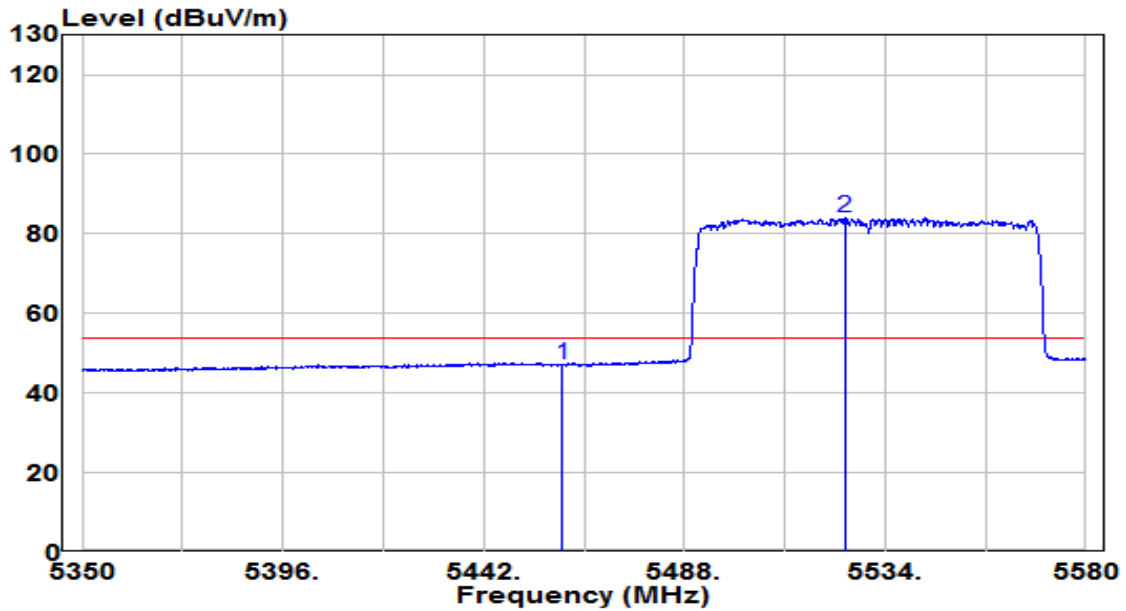


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	27.19	19.84	47.04	-6.96	54.00	Average
2	* 5524.685	64.04	19.96	84.01	N/A	N/A	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE80 at Channel 5610MHz (Beamforming Mode)	Test Voltage	120V/60Hz

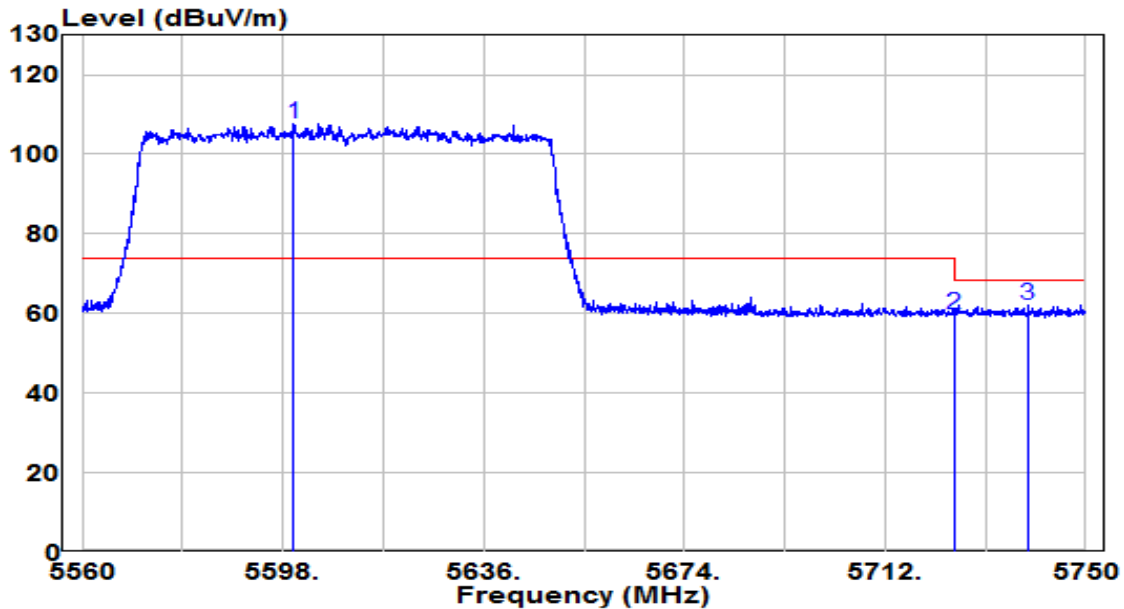


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5600.090	87.31	20.25	107.57	N/A	N/A	Peak
2	5725.000	38.93	20.73	59.66	-8.54	68.20	Peak
3	5738.980	41.10	20.79	61.88	-6.32	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE80 at Channel 5610MHz (Beamforming Mode)	Test Voltage	120V/60Hz

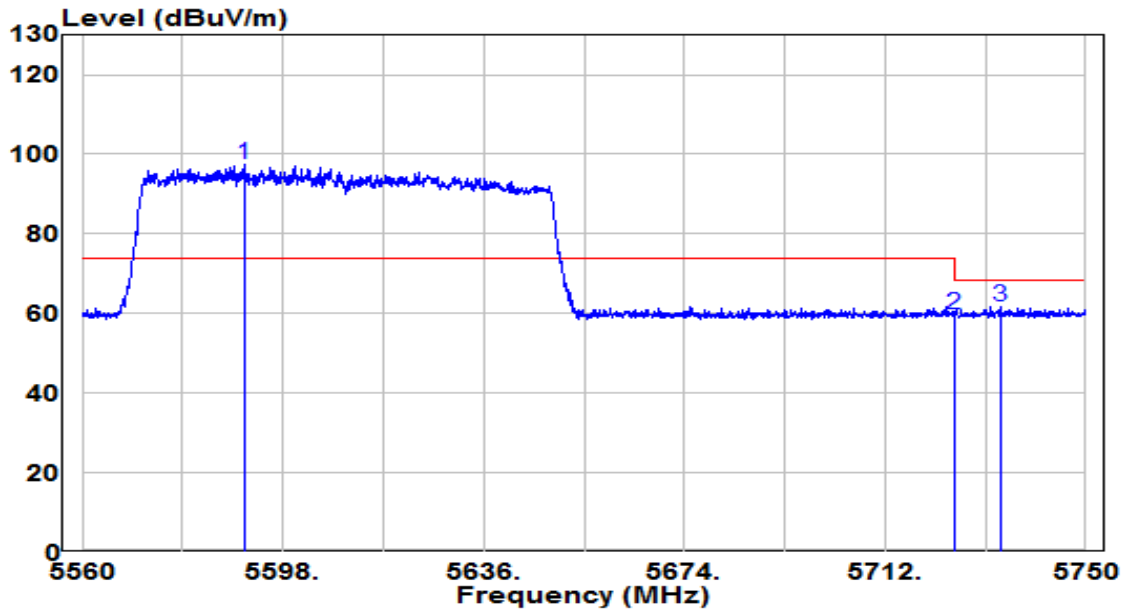


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5590.590	77.03	20.22	97.25	N/A	N/A	Peak
2	5725.000	39.06	20.73	59.80	-8.40	68.20	Peak
3	5733.755	40.85	20.77	61.62	-6.58	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C /45%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11 ax-HE80 at channel 5775 (Beamforming Mode)	Test Voltage	230V/50Hz

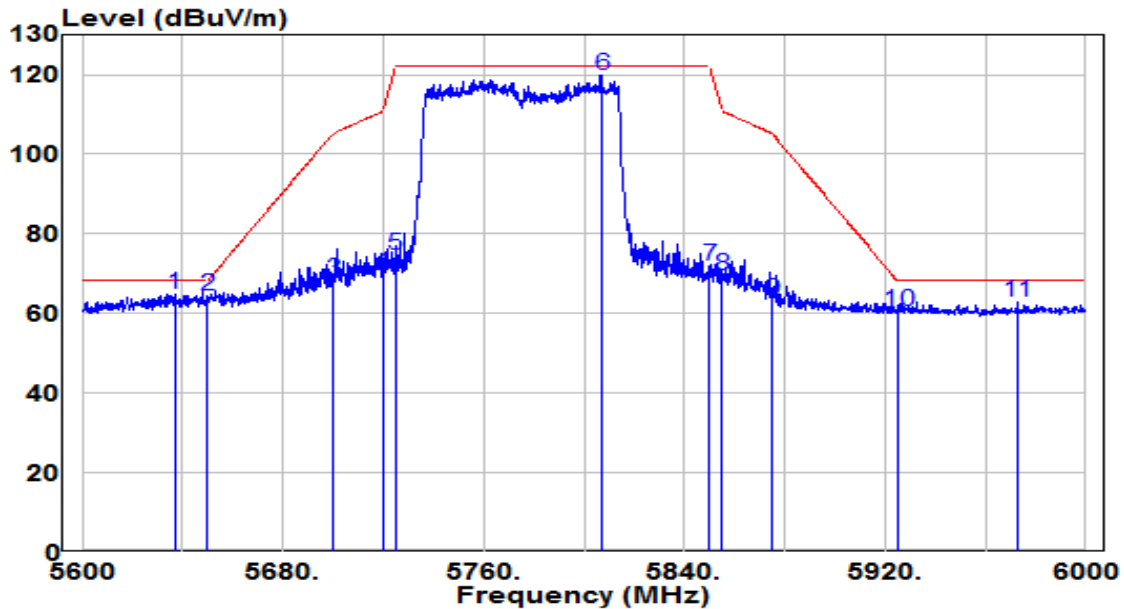


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5636.800	44.53	20.40	64.93	-3.28	68.20	Peak
2	5650.000	44.10	20.45	64.55	-3.65	68.20	Peak
3	5700.000	47.86	20.64	68.49	-36.71	105.20	Peak
4	5720.000	49.37	20.71	70.08	-40.72	110.80	Peak
5	5725.000	53.89	20.73	74.63	-47.57	122.20	Peak
6	* 5807.200	98.80	21.05	119.85	N/A	N/A	Peak
7	5850.000	50.84	21.21	72.05	-50.15	122.20	Peak
8	5855.000	48.25	21.23	69.49	-41.31	110.80	Peak
9	5875.000	42.05	21.31	63.35	-41.85	105.20	Peak
10	5925.000	39.00	21.50	60.50	-7.70	68.20	Peak
11	5972.800	41.03	21.69	62.72	-5.48	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C /45%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11 ax-HE80 at channel 5775(Beamforming Mode)	Test Voltage	230V/50Hz

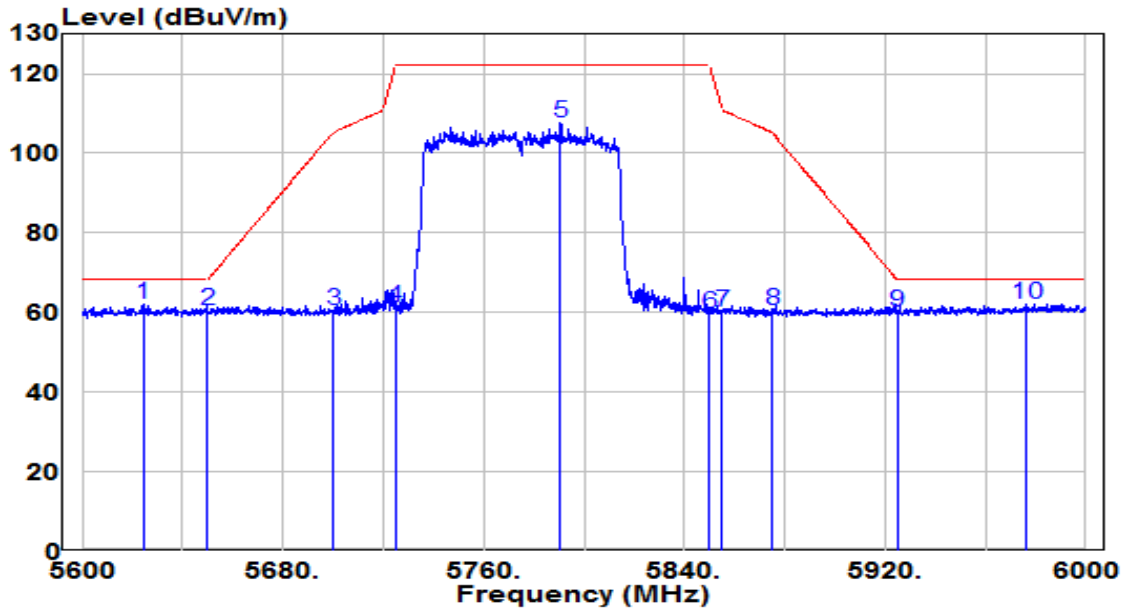


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5624.200	41.53	20.35	61.88	-6.32	68.20	Peak
2	5650.000	40.09	20.45	60.54	-7.66	68.20	Peak
3	5700.000	39.73	20.64	60.36	-44.84	105.20	Peak
4	5725.000	40.41	20.73	61.14	-61.06	122.20	Peak
5	5790.600	86.48	20.99	107.47	N/A	N/A	Peak
6	5850.000	38.62	21.21	59.84	-62.36	122.20	Peak
7	5855.000	39.02	21.23	60.25	-50.55	110.80	Peak
8	5875.000	39.21	21.31	60.52	-44.68	105.20	Peak
9	5925.000	38.41	21.50	59.91	-8.29	68.20	Peak
10	* 5976.400	40.49	21.70	62.19	-6.01	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE160 at Channel 5570MHz (Beamforming Mode)	Test Voltage	120V/60Hz

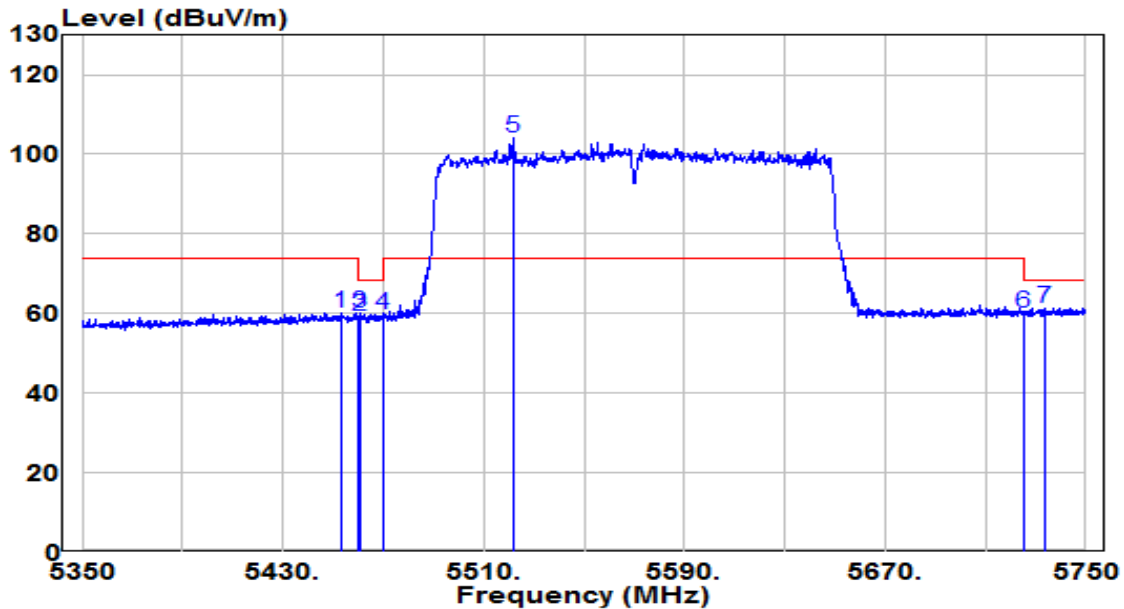


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5453.000	40.17	19.84	60.01	-13.99	74.00	Peak
2	5460.000	39.32	19.84	59.16	-9.04	68.20	Peak
3	5460.800	40.32	19.84	60.16	-8.04	68.20	Peak
4	5470.000	39.74	19.85	59.59	-8.61	68.20	Peak
5	* 5521.600	83.97	19.95	103.92	N/A	N/A	Peak
6	5725.000	39.23	20.73	59.97	-8.23	68.20	Peak
7	5733.400	40.67	20.77	61.44	-6.76	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE160 at Channel 5570MHz (Beamforming Mode)	Test Voltage	120V/60Hz

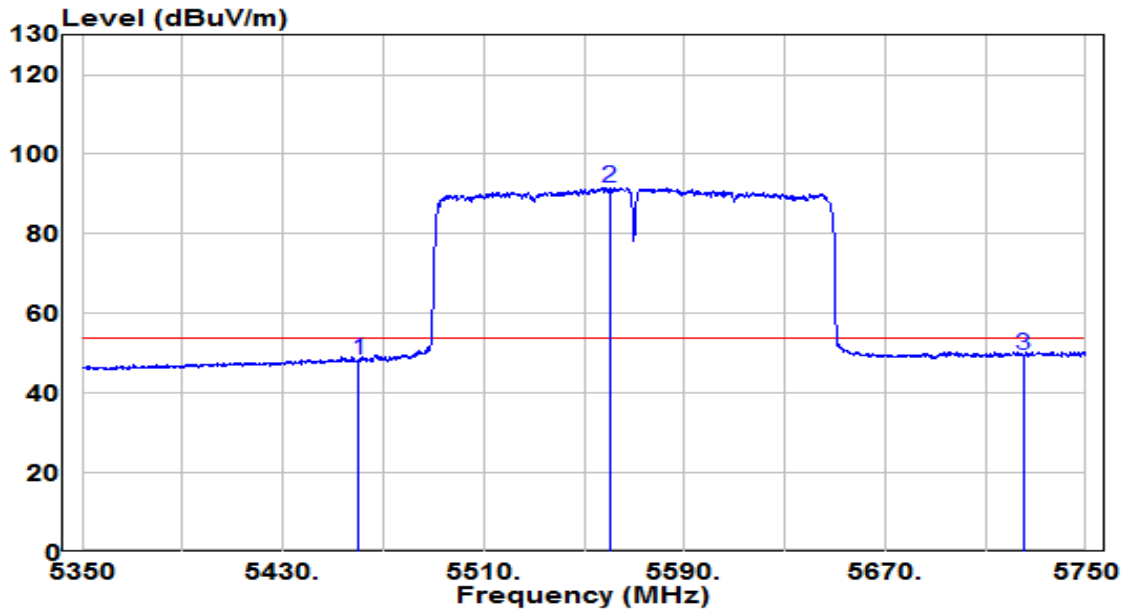


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	28.36	19.84	48.20	-5.80	54.00	Average
2	* 5560.400	71.57	20.10	91.67	N/A	N/A	Average
3	5725.000	28.69	20.73	49.43	-4.57	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE160 at Channel 5570MHz (Beamforming Mode)	Test Voltage	120V/60Hz

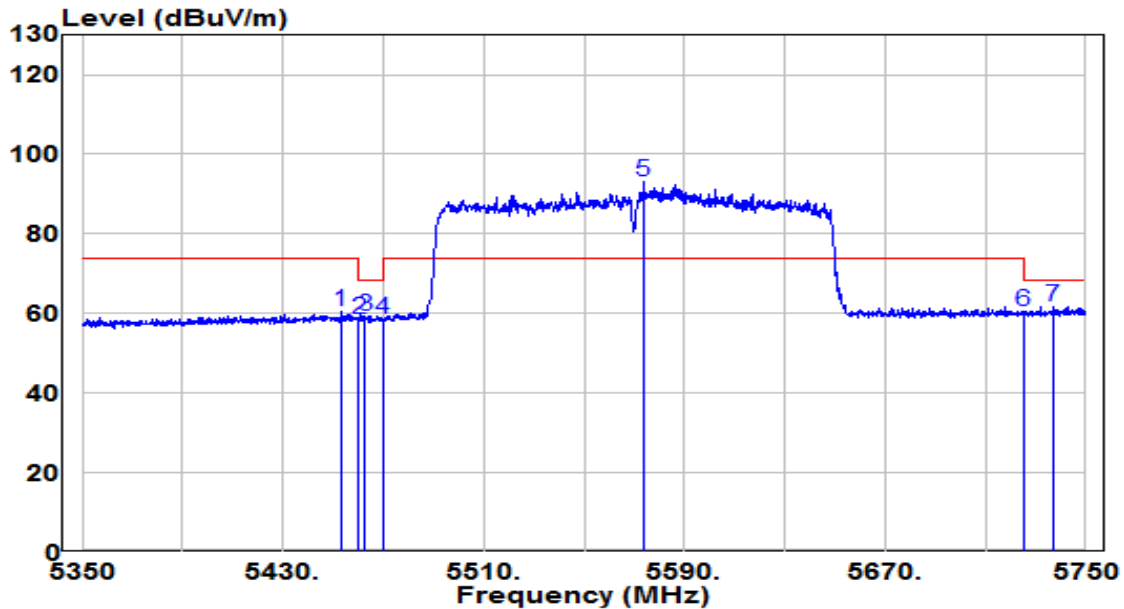


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5453.200	40.84	19.84	60.68	-13.32	74.00	Peak
2	5460.000	38.66	19.84	58.51	-9.69	68.20	Peak
3	5462.800	39.43	19.85	59.28	-8.92	68.20	Peak
4	5470.000	38.61	19.85	58.46	-9.74	68.20	Peak
5	* 5573.800	73.02	20.15	93.18	N/A	N/A	Peak
6	5725.000	39.79	20.73	60.52	-7.68	68.20	Peak
7	5736.800	40.92	20.78	61.70	-6.50	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-04-27
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	22.8°C /51.3%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit by 802.11ax-HE160 at Channel 5570MHz (Beamforming Mode)	Test Voltage	120V/60Hz

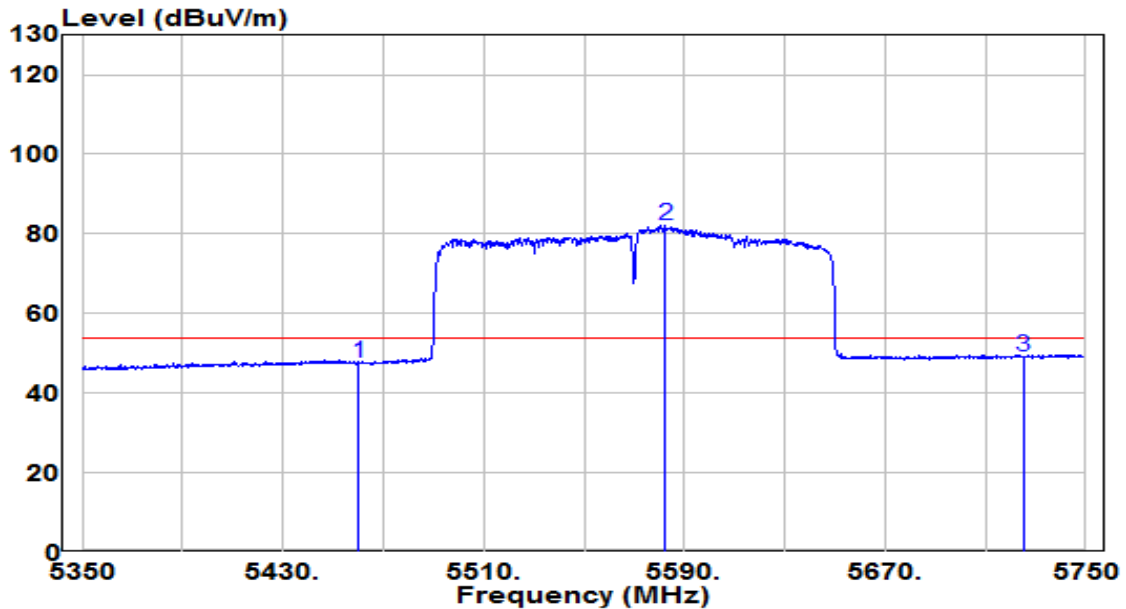

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	27.66	19.84	47.51	-6.49	54.00	Average
2	* 5582.600	61.90	20.19	82.08	N/A	N/A	Average
3	5725.000	28.42	20.73	49.16	-4.84	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.10. AC Conducted Emissions Measurement

7.10.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.


7.10.2. Test Procedure

The EUT was setup according to ANSI C63.4, 2009 and tested according to KDB 789033 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.


Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

7.10.3. Test Setup

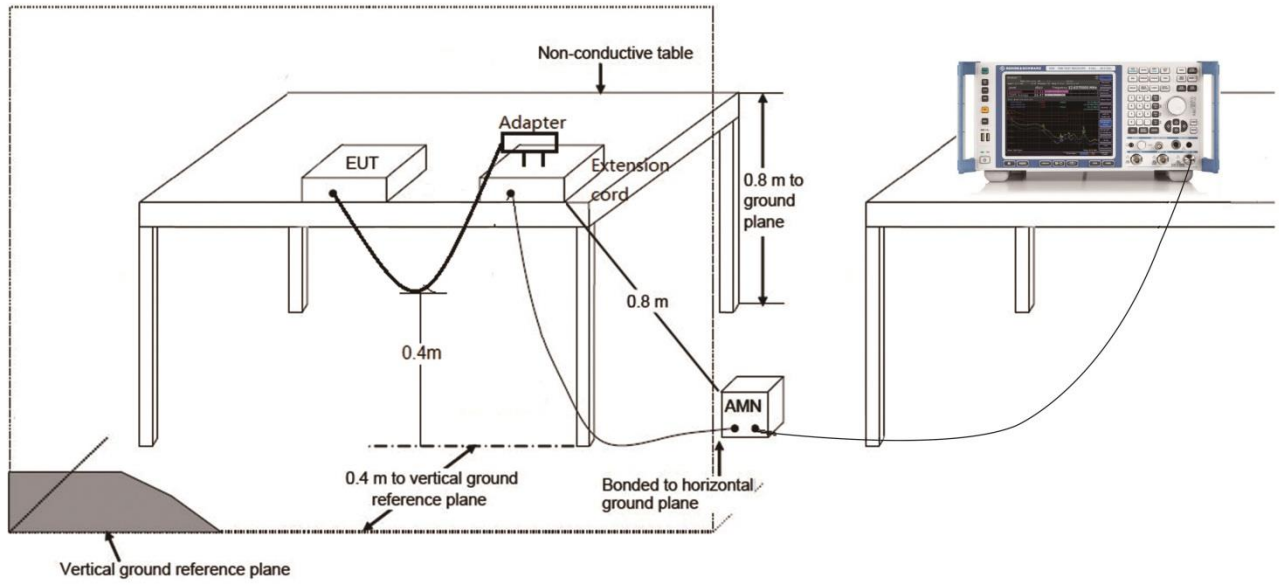

7.10.4. Test Result

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-05-13
Factor	CE_ENV216-L1 (Filter ON)_2020	Temp. / Humidity	22.4°C /45.6%
Polarity	Line1	Site / Test Engineer	SR2 / Peter Xu
Test Mode	1	Test Voltage	120V/60Hz

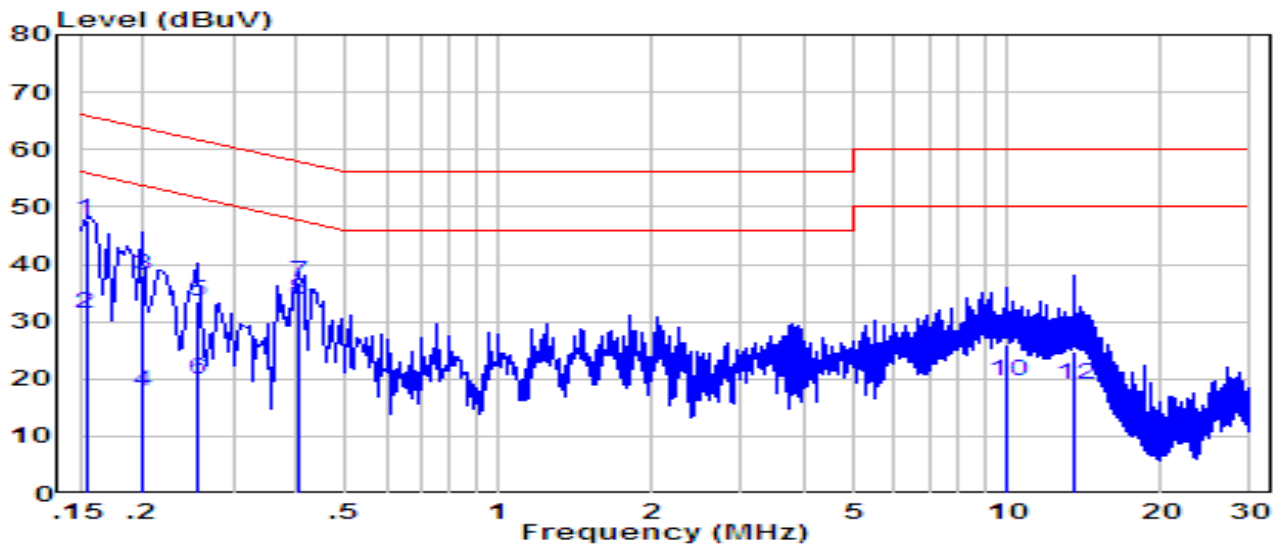


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	0.154	38.16	9.60	47.76	-18.02	65.78	QP
2	0.154	21.66	9.60	31.26	-24.52	55.78	Average
3	0.198	28.38	9.61	37.99	-25.70	63.69	QP
4	0.198	8.28	9.61	17.89	-35.80	53.69	Average
5	0.254	23.80	9.61	33.41	-28.21	61.63	QP
6	0.254	10.40	9.61	20.01	-31.61	51.63	Average
7	0.406	27.14	9.60	36.74	-20.99	57.73	QP
8	*	24.34	9.60	33.94	-13.79	47.73	Average
9	9.990	16.12	9.87	25.99	-34.01	60.00	QP
10	9.990	9.72	9.87	19.59	-30.41	50.00	Average
11	13.520	14.79	9.92	24.71	-35.30	60.00	QP
12	13.520	8.99	9.92	18.91	-31.10	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX6600 Tri-Band Wi-Fi 6 Router	Date of Test	2020-05-13
Factor	CE_ENV216-N (Filter ON)_2020	Temp. / Humidity	22.4°C /45.6%
Polarity	Neutral	Site / Test Engineer	SR2 / Peter Xu
Test Mode	1	Test Voltage	120V/60Hz

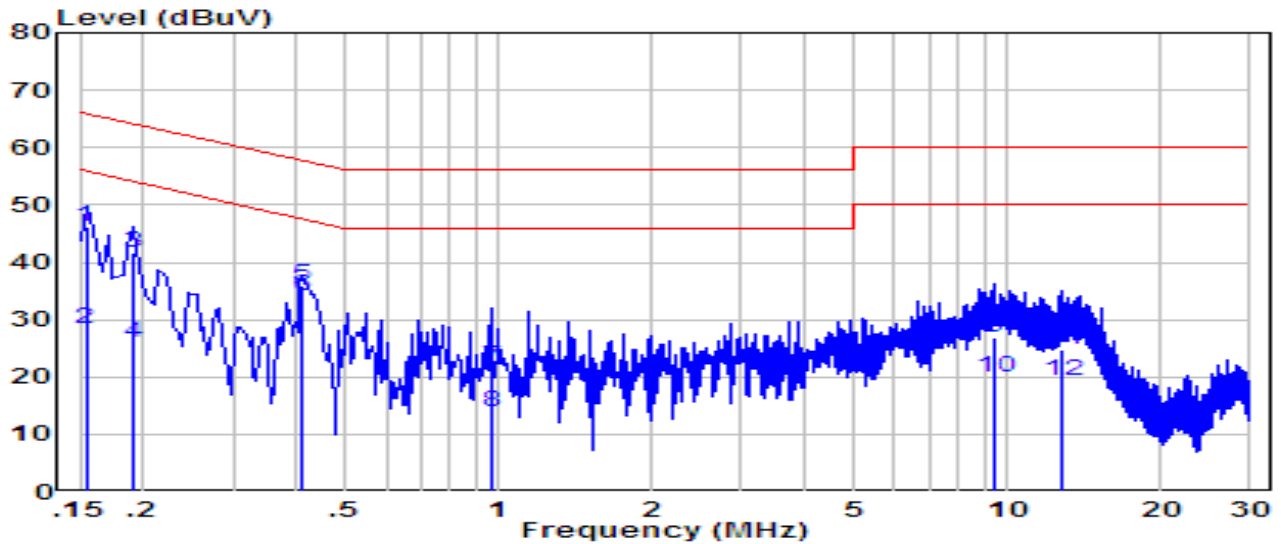

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	0.154	36.72	9.62	46.33	-19.45	65.78	QP
2	0.154	18.82	9.62	28.43	-27.35	55.78	Average
3	0.190	32.03	9.61	41.63	-22.40	64.04	QP
4	0.190	16.33	9.61	25.93	-28.10	54.04	Average
5	0.410	26.45	9.61	36.07	-21.58	57.65	QP
6	* 0.410	24.35	9.61	33.97	-13.68	47.65	Average
7	0.970	12.06	9.66	21.71	-34.29	56.00	QP
8	0.970	4.36	9.66	14.01	-31.99	46.00	Average
9	9.490	16.89	9.87	26.76	-33.24	60.00	QP
10	9.490	10.19	9.87	20.06	-29.94	50.00	Average
11	12.830	14.86	9.94	24.80	-35.20	60.00	QP
12	12.830	9.26	9.94	19.20	-30.80	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15E of the FCC Rules.

————— The End —————

Appendix A - Test Setup Photograph

Refer to "2004TW0003-UT" file.

Appendix B - EUT Photograph

Refer to "2004TW0003-UE" file.