


Appendix B. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	24°C	Humidity	51%
Test Engineer	Lucke Hsieh	Configurations	2.4GHz + 5GHz

Horizontal

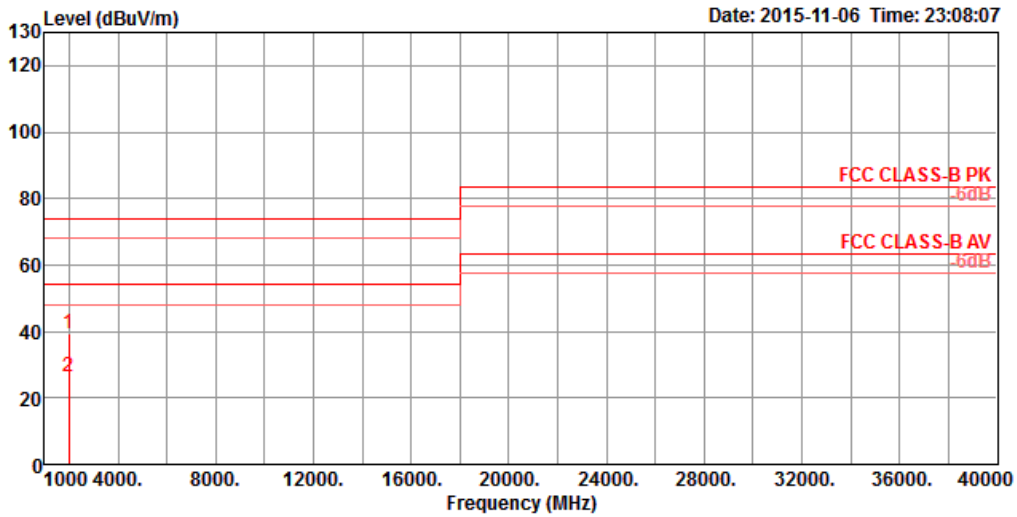

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1999.57	39.15	74.00	-34.85	44.03	4.25	26.00	35.13	154	164	Peak	HORIZONTAL
2	2000.00	26.53	54.00	-27.47	31.40	4.25	26.00	35.12	154	164	Average	HORIZONTAL

Vertical

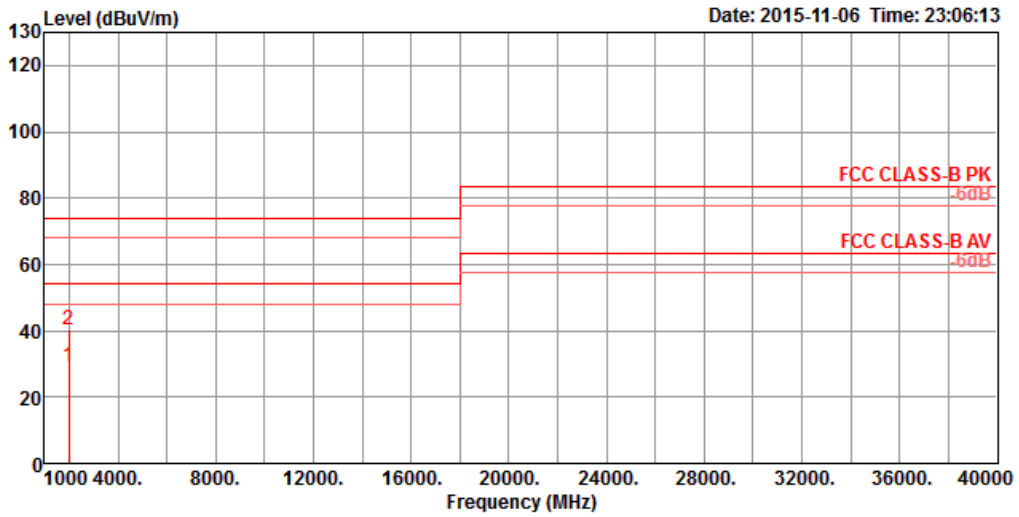

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2000.00	29.25	54.00	-24.75	34.12	4.25	26.00	35.12	100	355	Average VERTICAL
2	2000.00	40.16	74.00	-33.84	45.03	4.25	26.00	35.12	100	355	Peak VERTICAL