


Transmitter Radiated Unwanted Emissions (Above 1GHz) for 5150-5250MHz

Transmitter Radiated Unwanted Emissions (Above 1GHz)						
Modulation Mode	11a	Test Freq. (MHz)	5180			
N _{TX}	2	Polarization	V			

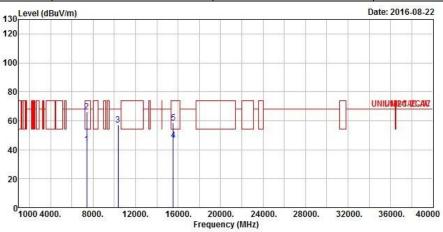

	Freq	Level	Over Limit	Limit Line		Antenna Factor		Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	2,-
1	7404.000	43.53	-10.47	54.00	34.98	36.35	7.63	35.43	Average
2	7404.000	66.11	-7.89	74.00	57.56	36.35	7.63	35.43	Peak
3	10360.000	57.17	-11.03	68.20	43.89	39.48	9.41	35.61	Peak
4	15540.000	46.54	-7.46	54.00	32.22	38.41	11.54	35.63	Average
5	15540.000	58.60	-15.40	74.00	44.28	38.41	11.54	35.63	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


 SPORTON INTERNATIONAL INC.
 Page No.
 : E3 of E38

 TEL: 886-3-327-3456
 Report Version
 : Rev. 02

 FAX: 886-3-327-0973
 Project No.
 : 651919



Transmitter Radiated Unwanted Emissions (Above 1GHz)						
Modulation Mode	11a	Test Freq. (MHz)	5180			
N_{TX}	2	Polarization	Н			

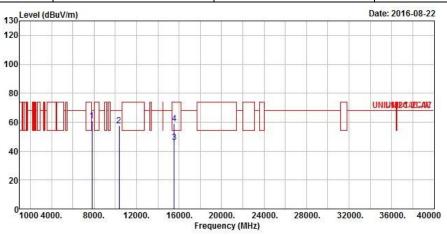

	Freq	Level	Over Limit	Limit Line		Antenna Factor		1000	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	-
1	7808.000	61.12	-7.08	68.20	51.83	36.97	7.88	35.56	Peak
2	10360.000	57.65	-10.55	68.20	44.37	39.48	9.41	35.61	Peak
3	15540.000	46.25	-7.75	54.00	31.93	38.41	11.54	35.63	Average
4	15540.000	58.90	-15.10	74.00	44.58	38.41	11.54	35.63	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


 SPORTON INTERNATIONAL INC.
 Page No.
 : E4 of E38

 TEL: 886-3-327-3456
 Report Version
 : Rev. 02

 FAX: 886-3-327-0973
 Project No.
 : 651919



Transmitter Radiated Unwanted Emissions (Above 1GHz)						
Modulation Mode	11a	Test Freq. (MHz)	5200			
N_{TX}	2	Polarization	V			

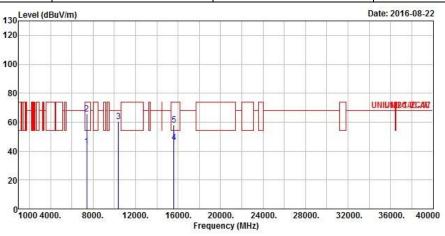

	Freq	Level	Over Limit	Limit Line		Antenna Factor			Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	-
1	7412.000	43.12	-10.88	54.00	34.55	36.37	7.63	35.43	Average
2	7412.000	65.49	-8.51	74.00	56.92	36.37	7.63	35.43	Peak
3	10400.000	60.53	-7.67	68.20	47.13	39.54	9.44	35.58	Peak
4	15600.000	46.21	-7.79	54.00	32.10	38.28	11.50	35.67	Average
5	15600.000	58.10	-15.90	74.00	43.99	38.28	11.50	35.67	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


 SPORTON INTERNATIONAL INC.
 Page No.
 : E5 of E38

 TEL: 886-3-327-3456
 Report Version
 : Rev. 02

 FAX: 886-3-327-0973
 Project No.
 : 651919



Tra	Transmitter Radiated Unwanted Emissions (Above 1GHz)						
Modulation Mode	11a	Test Freq. (MHz)	5200				
N _{TX}	2	Polarization	Н				

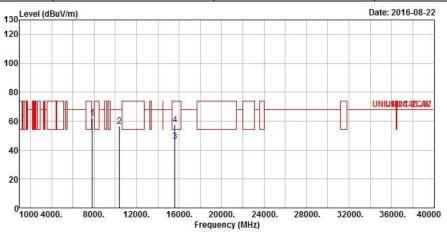

	Frea	Level	Over Limit	Limit Line		Antenna Factor		Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7836.000	61.99	-6.21	68.20	52.68	37.00	7.88	35.57	Peak
2	10400.000	56.46	-11.74	68.20	43.06	39.54	9.44	35.58	Peak
3	15600.000	46.16	-7.84	54.00	32.05	38.28	11.50	35.67	Average
4	15600.000	57.41	-16.59	74.00	43.30	38.28	11.50	35.67	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


 SPORTON INTERNATIONAL INC.
 Page No.
 : E6 of E38

 TEL: 886-3-327-3456
 Report Version
 : Rev. 02

 FAX: 886-3-327-0973
 Project No.
 : 651919



Transmitter Radiated Unwanted Emissions (Above 1GHz)							
Modulation Mode	11a	Test Freq. (MHz)	5240				
N_{TX}	2	Polarization	V				

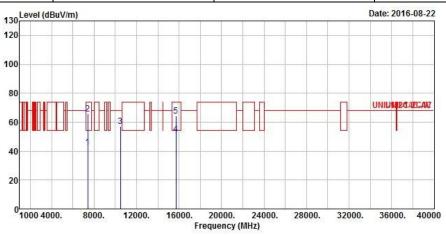

	Freq	Level	Over Limit	Limit Line		Antenna Factor		Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	-
1	7404.000	42.84	-11.16	54.00	34.29	36.35	7.63	35.43	Average
2	7404.000	65.80	-8.20	74.00	57.25	36.35	7.63	35.43	Peak
3	10480.000	57.32	-10.88	68.20	43.67	39.67	9.48	35.50	Peak
4	15720.000	51.60	-2.40	54.00	37.91	38.02	11.40	35.73	Average
5	15720 000	64 41	-9 59	71 00	50 72	38 02	11 10	35 73	Poak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


 SPORTON INTERNATIONAL INC.
 Page No.
 : E7 of E38

 TEL: 886-3-327-3456
 Report Version
 : Rev. 02

 FAX: 886-3-327-0973
 Project No.
 : 651919



Transmitter Radiated Unwanted Emissions (Above 1GHz)						
Modulation Mode	11a	Test Freq. (MHz)	5240			
N _{TX}	2	Polarization	Н			

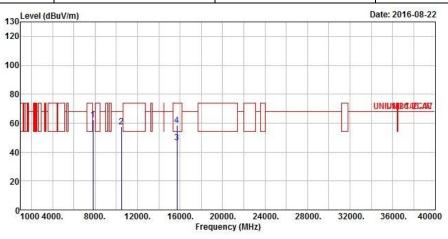

		1	0ver	Limit		Antenna			D
	Freq	revel	Limit	Line	revel	Factor	Loss	Factor	Kemark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	2
1	7816.000	62.55	-5.65	68.20	53.25	36.98	7.88	35.56	Peak
2	10480.000	57.70	-10.50	68.20	44.05	39.67	9.48	35.50	Peak
3	15720.000	46.49	-7.51	54.00	32.80	38.02	11.40	35.73	Average
4	15720.000	58.70	-15.30	74.00	45.01	38.02	11.40	35.73	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.


Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


 SPORTON INTERNATIONAL INC.
 Page No.
 : E8 of E38

 TEL: 886-3-327-3456
 Report Version
 : Rev. 02

 FAX: 886-3-327-0973
 Project No.
 : 651919





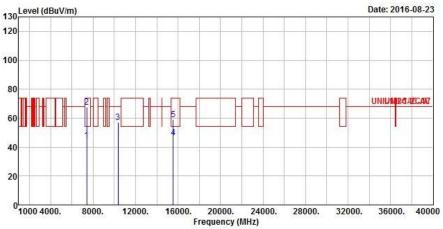

	Freq	Level	Over Limit	C 20 1 20 0		Antenna Factor			Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	-
1	7403.000	44.40	-9.60	54.00	35.85	36.35	7.63	35.43	Average
2	7403.000	67.56	-6.44	74.00	59.01	36.35	7.63	35.43	Peak
3	10360.000	57.15	-11.05	68.20	43.87	39.48	9.41	35.61	Peak
4	15540.000	46.72	-7.28	54.00	32.40	38.41	11.54	35.63	Average
5	15540.000	59.09	-14.91	74.00	44.77	38.41	11.54	35.63	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


 SPORTON INTERNATIONAL INC.
 Page No.
 : E9 of E38

 TEL: 886-3-327-3456
 Report Version
 : Rev. 02

 FAX: 886-3-327-0973
 Project No.
 : 651919



Tra	ınsmitter Radiated Unwan	ted Emissions (Above 1G	Hz)
Modulation Mode	VHT20	Test Freq. (MHz)	5180
N_{TX}	2	Polarization	Н

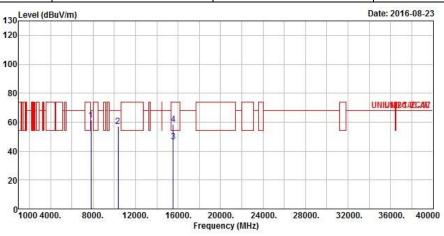

	Freq	Level	Over Limit	Limit Line		Antenna Factor			Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	-
1	7808.000	61.20	-7.00	68.20	51.91	36.97	7.88	35.56	Peak
2	10360.000	57.29	-10.91	68.20	44.01	39.48	9.41	35.61	Peak
3	15540.000	46.67	-7.33	54.00	32.35	38.41	11.54	35.63	Average
4	15540.000	58.70	-15.30	74.00	44.38	38.41	11.54	35.63	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.


Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


 SPORTON INTERNATIONAL INC.
 Page No.
 : E10 of E38

 TEL: 886-3-327-3456
 Report Version
 : Rev. 02

 FAX: 886-3-327-0973
 Project No.
 : 651919





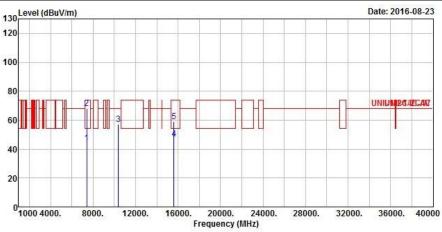

	Freq	Level	Over Limit	Limit Line		Antenna Factor			Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	2 -
1	7400.000	44.21	-9.79	54.00	35.67	36.34	7.63	35.43	Average
2	7400.000	68.12	-5.88	74.00	59.58	36.34	7.63	35.43	Peak
3	10400.000	57.17	-11.03	68.20	43.77	39.54	9.44	35.58	Peak
4	15600.000	47.11	-6.89	54.00	33.00	38.28	11.50	35.67	Average
5	15600.000	59.16	-14.84	74.00	45.05	38.28	11.50	35.67	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.


Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


 SPORTON INTERNATIONAL INC.
 Page No.
 : E11 of E38

 TEL: 886-3-327-3456
 Report Version
 : Rev. 02

 FAX: 886-3-327-0973
 Project No.
 : 651919





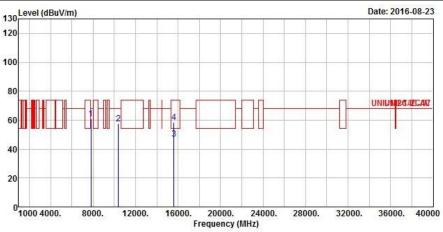

	-	1	0ver	C-201 1 201 0		Antenna		1000	DI.	
	Freq	revel	Limit	Line	revel	Factor	LOSS	Factor	Kemark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		
1	7816.000	60.83	-7.37	68.20	51.53	36.98	7.88	35.56	Peak	
2	10400.000	57.55	-10.65	68.20	44.15	39.54	9.44	35.58	Peak	
3	15600.000	46.80	-7.20	54.00	32.69	38.28	11.50	35.67	Average	
4	15600.000	58.74	-15.26	74.00	44.63	38.28	11.50	35.67	Peak	

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.


Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


 SPORTON INTERNATIONAL INC.
 Page No.
 : E12 of E38

 TEL: 886-3-327-3456
 Report Version
 : Rev. 02

 FAX: 886-3-327-0973
 Project No.
 : 651919





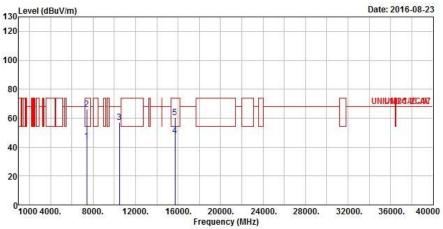

	Freq	Level	Over Limit	Limit Line		Antenna Factor			Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	-
1	7399.000	44.30	-9.70	54.00	35.76	36.34	7.63	35.43	Average
2	7399.000	66.27	-7.73	74.00	57.73	36.34	7.63	35.43	Peak
3	10480.000	57.26	-10.94	68.20	43.61	39.67	9.48	35.50	Peak
4	15720.000	48.06	-5.94	54.00	34.37	38.02	11.40	35.73	Average
5	15720.000	60.36	-13.64	74.00	46.67	38.02	11.40	35.73	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.


Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


 SPORTON INTERNATIONAL INC.
 Page No.
 : E13 of E38

 TEL: 886-3-327-3456
 Report Version
 : Rev. 02

 FAX: 886-3-327-0973
 Project No.
 : 651919





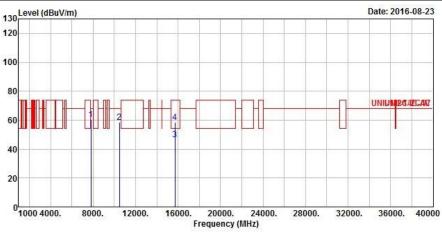

	-	1 1	0ver	Limit		Antenna		Preamp	D
	Freq	revel	Limit	Line	rever	Factor	LOSS	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	2
1	7816.000	60.31	-7.89	68.20	51.01	36.98	7.88	35.56	Peak
2	10480.000	58.61	-9.59	68.20	44.96	39.67	9.48	35.50	Peak
3	15720.000	46.59	-7.41	54.00	32.90	38.02	11.40	35.73	Average
4	15720.000	58.53	-15.47	74.00	44.84	38.02	11.40	35.73	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


 SPORTON INTERNATIONAL INC.
 Page No.
 : E14 of E38

 TEL: 886-3-327-3456
 Report Version
 : Rev. 02

 FAX: 886-3-327-0973
 Project No.
 : 651919



Transmitter Radiated Unwanted Emissions (Above 1GHz)								
Modulation Mode	VHT40	Test Freq. (MHz)	5190					
N_{TX}	2	Polarization	V					

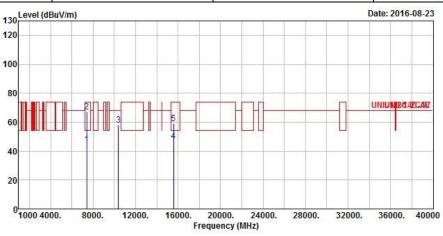

	Freq	Level	Over Limit	Limit Line		Antenna Factor			Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	-
1	7405.000	44.52	-9.48	54.00	35.97	36.35	7.63	35.43	Average
2	7405.000	67.12	-6.88	74.00	58.57	36.35	7.63	35.43	Peak
3	10380.000	57.81	-10.39	68.20	44.46	39.51	9.44	35.60	Peak
4	15570.000	46.79	-7.21	54.00	32.59	38.35	11.50	35.65	Average
5	15570.000	58.99	-15.01	74.00	44.79	38.35	11.50	35.65	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.


Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


 SPORTON INTERNATIONAL INC.
 Page No.
 : E15 of E38

 TEL: 886-3-327-3456
 Report Version
 : Rev. 02

 FAX: 886-3-327-0973
 Project No.
 : 651919





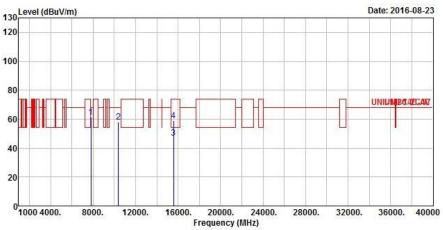

	Freq	Level	Over Limit	Limit Line		Antenna Factor			Remark
	MHZ	dBuV/m	qB	dBuV/m	dBuV	dB/m	dB	dB	
1	7816.000	61.39	-6.81	68.20	52.09	36.98	7.88	35.56	Peak
2	10380.000	57.99	-10.21	68.20	44.64	39.51	9.44	35.60	Peak
3	15570.000	46.85	-7.15	54.00	32.65	38.35	11.50	35.65	Average
4	15570.000	59.24	-14.76	74.00	45.04	38.35	11.50	35.65	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


 SPORTON INTERNATIONAL INC.
 Page No.
 : E16 of E38

 TEL: 886-3-327-3456
 Report Version
 : Rev. 02

 FAX: 886-3-327-0973
 Project No.
 : 651919



Tra	ınsmitter Radiated Unwan	ted Emissions (Above 1G	Hz)
Modulation Mode	VHT40	Test Freq. (MHz)	5230
N_{TX}	2	Polarization	V

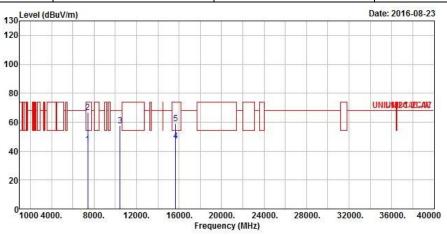

	Freq	Level	Over Limit	Limit Line		Antenna Factor		1000	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	-
1	7401.000	44.46	-9.54	54.00	35.92	36.34	7.63	35.43	Average
2	7401.000	66.81	-7.19	74.00	58.27	36.34	7.63	35.43	Peak
3	10460.000	57.65	-10.55	68.20	44.05	39.64	9.48	35.52	Peak
4	15690.000	46.97	-7.03	54.00	33.21	38.08	11.40	35.72	Average
5	15690.000	59.12	-14.88	74.00	45.36	38.08	11.40	35.72	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


 SPORTON INTERNATIONAL INC.
 Page No.
 : E17 of E38

 TEL: 886-3-327-3456
 Report Version
 : Rev. 02

 FAX: 886-3-327-0973
 Project No.
 : 651919



Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	Modulation Mode VHT40 Test Freq. (MHz) 5230								
N_{TX}	2	Polarization	Н						

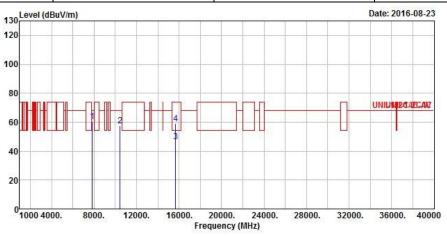

	Frea	Lovel	Over Limit	Limit		Antenna Factor		Preamp	Remark
	Freq	rever	LIMIL	Line	rever	Factor	LOSS	rac tor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	2
1	7824.000	60.55	-7.65	68.20	51.24	36.99	7.88	35.56	Peak
2	10460.000	57.46	-10.74	68.20	43.86	39.64	9.48	35.52	Peak
3	15690.000	46.55	-7.45	54.00	32.79	38.08	11.40	35.72	Average
4	15690.000	59.17	-14.83	74.00	45.41	38.08	11.40	35.72	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.


Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


 SPORTON INTERNATIONAL INC.
 Page No.
 : E18 of E38

 TEL: 886-3-327-3456
 Report Version
 : Rev. 02

 FAX: 886-3-327-0973
 Project No.
 : 651919





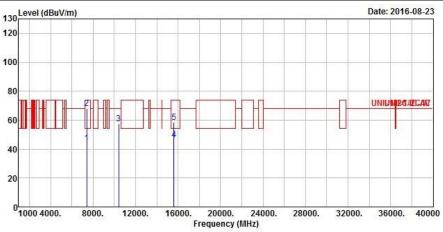

	Freq	Level	Over Limit	Limit Line		Antenna Factor		Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	-
1	7406.000	44.07	-9.93	54.00	35.51	36.36	7.63	35.43	Average
2	7406.000	68.15	-5.85	74.00	59.59	36.36	7.63	35.43	Peak
3	10420.000	57.38	-10.82	68.20	43.91	39.57	9.46	35.56	Peak
4	15630.000	46.66	-7.34	54.00	32.66	38.21	11.47	35.68	Average
5	15630 000	58 69	_15 31	71 00	11 69	38 21	11 17	35 68	Poak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


 SPORTON INTERNATIONAL INC.
 Page No.
 : E19 of E38

 TEL: 886-3-327-3456
 Report Version
 : Rev. 02

 FAX: 886-3-327-0973
 Project No.
 : 651919



Transmitter Radiated Unwanted Emissions (Above 1GHz)								
Modulation Mode VHT80 Test Freq. (MHz) 5210								
N_{TX}	2	Polarization	Н					

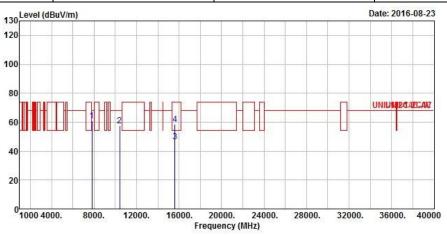

	Frea	Level	Over Limit	Limit Line		Antenna Factor		1000	Remark	
										_
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		
1	7816.000	61.13	-7.07	68.20	51.83	36.98	7.88	35.56	Peak	
2	10420.000	57.70	-10.50	68.20	44.23	39.57	9.46	35.56	Peak	
3	15630.000	46.65	-7.35	54.00	32.65	38.21	11.47	35.68	Average	
4	15630.000	58.75	-15.25	74.00	44.75	38.21	11.47	35.68	Peak	

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

 SPORTON INTERNATIONAL INC.
 Page No.
 : E20 of E38


 TEL: 886-3-327-3456
 Report Version
 : Rev. 02

 FAX: 886-3-327-0973
 Project No.
 : 651919



Transmitter Radiated Unwanted Emissions (Above 1GHz) for 5725-5850MHz

Tra	Transmitter Radiated Unwanted Emissions (Above 1GHz)								
Modulation Mode	Modulation Mode 11a Test Freq. (MHz) 5745								
N _{TX}	2	Polarization	V						

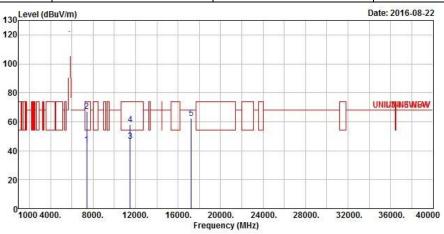

	Freq	Level	Over	Limit		Factor			Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	27-
1	7401.000	44.37	-9.63	54.00	35.83	36.34	7.63	35.43	Average
2	7401.000	66.92	-7.08	74.00	58.38	36.34	7.63	35.43	Peak
3	11490.000	46.50	-7.50	54.00	31.94	40.10	9.74	35.28	Average
4	11490.000	58.23	-15.77	74.00	43.67	40.10	9.74	35.28	Peak
5	17235.000	62.13	-6.07	68.20	44.24	41.05	11.93	35.09	Peak


- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


 SPORTON INTERNATIONAL INC.
 Page No.
 : E21 of E38

 TEL: 886-3-327-3456
 Report Version
 : Rev. 02

 FAX: 886-3-327-0973
 Project No.
 : 651919





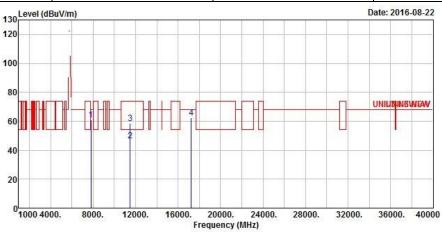

				Limit				10.00	
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	2,=-
1	7820.000	60.91	-7.29	68.20	51.61	36.98	7.88	35.56	Peak
2	11490.000	46.34	-7.66	54.00	31.78	40.10	9.74	35.28	Average
3	11490.000	58.75	-15.25	74.00	44.19	40.10	9.74	35.28	Peak
4	17235.000	62.28	-5.92	68.20	44.39	41.05	11.93	35.09	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


 SPORTON INTERNATIONAL INC.
 Page No.
 : E22 of E38

 TEL: 886-3-327-3456
 Report Version
 : Rev. 02

 FAX: 886-3-327-0973
 Project No.
 : 651919



Transmitter Radiated Unwanted Emissions (Above 1GHz)								
Modulation Mode 11a Test Freq. (MHz) 5785								
N _{TX}	2	Polarization	V					

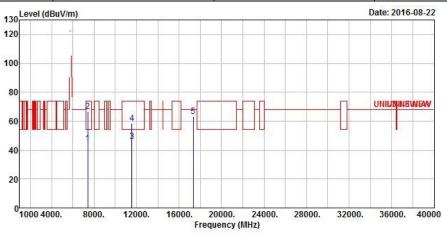

	Freq	Level	Over Limit	Limit Line		Antenna Factor		Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	2
1	7402.000	44.44	-9.56	54.00	35.89	36.35	7.63	35.43	Average
2	7402.000	66.76	-7.24	74.00	58.21	36.35	7.63	35.43	Peak
3	11570.000	46.15	-7.85	54.00	31.74	39.93	9.79	35.31	Average
4	11570.000	58.35	-15.65	74.00	43.94	39.93	9.79	35.31	Peak
5	17355.000	63.40	-4.80	68.20	45.18	41.44	11.92	35.14	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


 SPORTON INTERNATIONAL INC.
 Page No.
 : E23 of E38

 TEL: 886-3-327-3456
 Report Version
 : Rev. 02

 FAX: 886-3-327-0973
 Project No.
 : 651919



Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	Modulation Mode 11a Test Freq. (MHz) 5785								
N_{TX}	2	Polarization	Н						

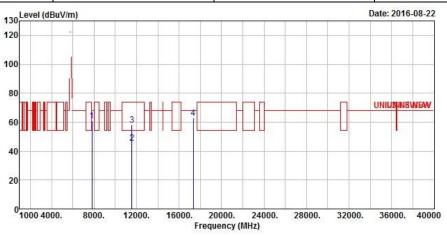

	Freq	Level	Over Limit	Limit Line		Antenna Factor		1000	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	-
1	7820.000	60.99	-7.21	68.20	51.69	36.98	7.88	35.56	Peak
2	11570.000	45.57	-8.43	54.00	31.16	39.93	9.79	35.31	Average
3	11570.000	58.05	-15.95	74.00	43.64	39.93	9.79	35.31	Peak
4	17355.000	62.64	-5.56	68.20	44.42	41.44	11.92	35.14	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


 SPORTON INTERNATIONAL INC.
 Page No.
 : E24 of E38

 TEL: 886-3-327-3456
 Report Version
 : Rev. 02

 FAX: 886-3-327-0973
 Project No.
 : 651919



Transmitter Radiated Unwanted Emissions (Above 1GHz)								
Modulation Mode 11a Test Freq. (MHz) 5825								
N _{TX}	Polarization	V						

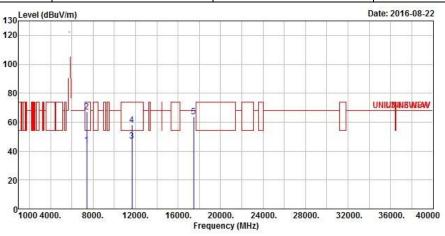

			0ver	Limit	Read	Antenna	Cable	Preamp	
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7400.000	44.29	-9.71	54.00	35.75	36.34	7.63	35.43	Average
2	7400.000	66.94	-7.06	74.00	58.40	36.34	7.63	35.43	Peak
3	11650.000	47.03	-6.97	54.00	32.79	39.74	9.84	35.34	Average
4	11650.000	58.27	-15.73	74.00	44.03	39.74	9.84	35.34	Peak
5	17475.000	63.59	-4.61	68.20	45.05	41.82	11.90	35.18	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


 SPORTON INTERNATIONAL INC.
 Page No.
 : E25 of E38

 TEL: 886-3-327-3456
 Report Version
 : Rev. 02

 FAX: 886-3-327-0973
 Project No.
 : 651919



Transmitter Radiated Unwanted Emissions (Above 1GHz)								
Modulation Mode 11a Test Freq. (MHz) 5825								
N_{TX}	N _{TX} 2 Polarization							

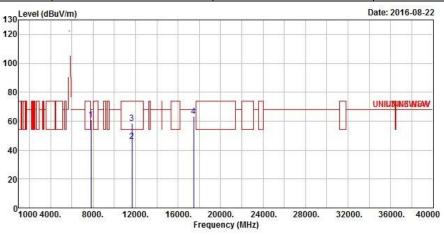

	Frea	l eve1	Over Limit	Limit		Antenna Factor		Preamp Factor	Remark
	,,,,,		LIMIL	Line		, accor	2033	decor	remark.
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7820.000	60.99	-7.21	68.20	51.69	36.98	7.88	35.56	Peak
2	11650.000	46.15	-7.85	54.00	31.91	39.74	9.84	35.34	Average
3	11650.000	58.76	-15.24	74.00	44.52	39.74	9.84	35.34	Peak
4	17475.000	63.34	-4.86	68.20	44.80	41.82	11.90	35.18	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.


Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


 SPORTON INTERNATIONAL INC.
 Page No.
 : E26 of E38

 TEL: 886-3-327-3456
 Report Version
 : Rev. 02

 FAX: 886-3-327-0973
 Project No.
 : 651919





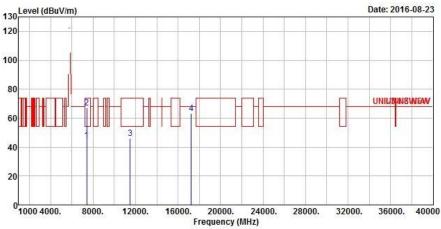

	Freq	Level	Over Limit	Limit Line		Antenna Factor		Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	-
1	7401.000	44.45	-9.55	54.00	35.91	36.34	7.63	35.43	Average
2	7401.000	67.06	-6.94	74.00	58.52	36.34	7.63	35.43	Peak
3	11490.000	46.28	-7.72	54.00	31.72	40.10	9.74	35.28	Average
4	17235.000	63.11	-5.09	68.20	45.22	41.05	11.93	35.09	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.


Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


 SPORTON INTERNATIONAL INC.
 Page No.
 : E27 of E38

 TEL: 886-3-327-3456
 Report Version
 : Rev. 02

 FAX: 886-3-327-0973
 Project No.
 : 651919





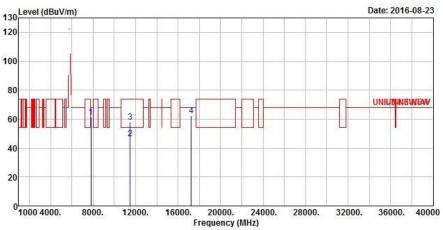

	Freq	Level	Over Limit	Limit Line		Antenna Factor		Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	-
1	7808.000	61.24	-6.96	68.20	51.95	36.97	7.88	35.56	Peak
2	11490.000	46.31	-7.69	54.00	31.75	40.10	9.74	35.28	Average
3	11490.000	58.23	-15.77	74.00	43.67	40.10	9.74	35.28	Peak
4	17235.000	62.38	-5.82	68.20	44.49	41.05	11.93	35.09	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


 SPORTON INTERNATIONAL INC.
 Page No.
 : E28 of E38

 TEL: 886-3-327-3456
 Report Version
 : Rev. 02

 FAX: 886-3-327-0973
 Project No.
 : 651919



Transmitter Radiated Unwanted Emissions (Above 1GHz)								
Modulation Mode VHT20 Test Freq. (MHz) 5785								
N_{TX}	2	Polarization	V					

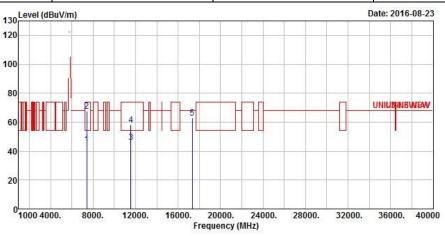

	Freq	Level	Over Limit	Limit Line		Antenna Factor		Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	2,
1	7401.000	44.49	-9.51	54.00	35.95	36.34	7.63	35.43	Average
2	7401.000	67.53	-6.47	74.00	58.99	36.34	7.63	35.43	Peak
3	11570.000	46.03	-7.97	54.00	31.62	39.93	9.79	35.31	Average
4	11570.000	57.95	-16.05	74.00	43.54	39.93	9.79	35.31	Peak
5	17355.000	62.99	-5.21	68.20	44.77	41.44	11.92	35.14	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


 SPORTON INTERNATIONAL INC.
 Page No.
 : E29 of E38

 TEL: 886-3-327-3456
 Report Version
 : Rev. 02

 FAX: 886-3-327-0973
 Project No.
 : 651919



Transmitter Radiated Unwanted Emissions (Above 1GHz)								
Modulation Mode VHT20 Test Freq. (MHz) 5785								
N _{TX} 2 Polarization H								

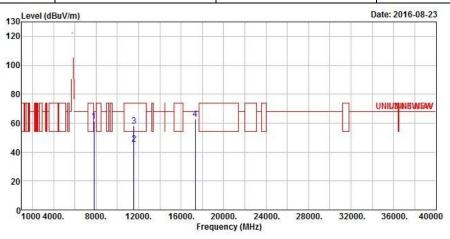

			0ver	Limit	ReadA	Antenna	Cable	Preamp	
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7820.000	61.45	-6.75	68.20	52.15	36.98	7.88	35.56	Peak
2	11570.000	45.77	-8.23	54.00	31.36	39.93	9.79	35.31	Average
3	11570.000	58.11	-15.89	74.00	43.70	39.93	9.79	35.31	Peak
4	17355.000	63.01	-5.19	68.20	44.79	41.44	11.92	35.14	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.


Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


 SPORTON INTERNATIONAL INC.
 Page No.
 : E30 of E38

 TEL: 886-3-327-3456
 Report Version
 : Rev. 02

 FAX: 886-3-327-0973
 Project No.
 : 651919





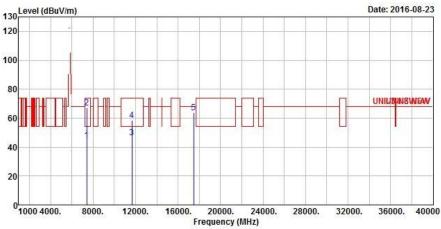

	Freq	Level	Over Limit	T-80 18 18		Antenna Factor		Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	2,=
1	7401.000	44.48	-9.52	54.00	35.94	36.34	7.63	35.43	Average
2	7401.000	67.23	-6.77	74.00	58.69	36.34	7.63	35.43	Peak
3	11650.000	46.63	-7.37	54.00	32.39	39.74	9.84	35.34	Average
4	11650.000	58.38	-15.62	74.00	44.14	39.74	9.84	35.34	Peak
5	17475 000	63 78	-4 42	68 20	45 24	41 82	11 90	35 18	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


 SPORTON INTERNATIONAL INC.
 Page No.
 : E31 of E38

 TEL: 886-3-327-3456
 Report Version
 : Rev. 02

 FAX: 886-3-327-0973
 Project No.
 : 651919



Transmitter Radiated Unwanted Emissions (Above 1GHz)								
Modulation Mode VHT20 Test Freq. (MHz) 5825								
N _{TX}	N _{TX} 2 Polarization							

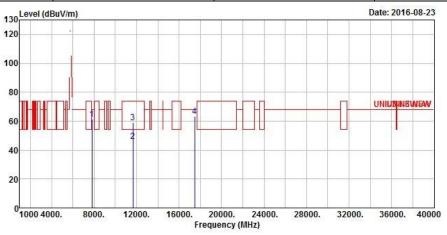

	Frea	l eve1	Over Limit	Limit		Antenna Factor		Preamp	Remark
	,,,,,		LIMIL	Line		, accor	2033	decor	II CIII CI I
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7820.000	61.18	-7.02	68.20	51.88	36.98	7.88	35.56	Peak
2	11650.000	46.06	-7.94	54.00	31.82	39.74	9.84	35.34	Average
3	11650.000	58.96	-15.04	74.00	44.72	39.74	9.84	35.34	Peak
4	17475.000	63.42	-4.78	68.20	44.88	41.82	11.90	35.18	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


 SPORTON INTERNATIONAL INC.
 Page No.
 : E32 of E38

 TEL: 886-3-327-3456
 Report Version
 : Rev. 02

 FAX: 886-3-327-0973
 Project No.
 : 651919



Transmitter Radiated Unwanted Emissions (Above 1GHz)							
Modulation Mode	VHT40	Test Freq. (MHz)	5755				
N _{TX}	2	Polarization	V				

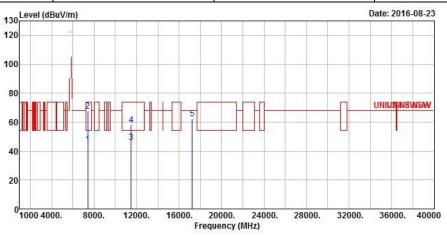

	Freq	Level	Over Limit	C 20 1 20 0		Antenna Factor			Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	2
1	7403.000	44.62	-9.38	54.00	36.07	36.35	7.63	35.43	Average
2	7403.000	67.62	-6.38	74.00	59.07	36.35	7.63	35.43	Peak
3	11510.000	46.25	-7.75	54.00	31.71	40.08	9.74	35.28	Average
4	11510.000	58.22	-15.78	74.00	43.68	40.08	9.74	35.28	Peak
5	17265.000	62.60	-5.60	68.20	44.64	41.15	11.92	35.11	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


 SPORTON INTERNATIONAL INC.
 Page No.
 : E33 of E38

 TEL: 886-3-327-3456
 Report Version
 : Rev. 02

 FAX: 886-3-327-0973
 Project No.
 : 651919



Transmitter Radiated Unwanted Emissions (Above 1GHz)							
Modulation Mode	VHT40	Test Freq. (MHz)	5755				
N _{TX}	2	Polarization	Н				

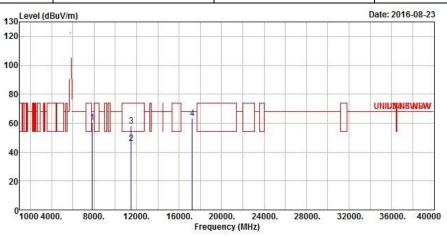

			0ver	Limit	Read	Antenna	Cable	Preamp	
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	-
1	7824.000	60.55	-7.65	68.20	51.24	36.99	7.88	35.56	Peak
2	11510.000	46.20	-7.80	54.00	31.66	40.08	9.74	35.28	Average
3	11510.000	58.02	-15.98	74.00	43.48	40.08	9.74	35.28	Peak
4	17265.000	63.40	-4.80	68.20	45.44	41.15	11.92	35.11	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


 SPORTON INTERNATIONAL INC.
 Page No.
 : E34 of E38

 TEL: 886-3-327-3456
 Report Version
 : Rev. 02

 FAX: 886-3-327-0973
 Project No.
 : 651919



Transmitter Radiated Unwanted Emissions (Above 1GHz)							
Modulation Mode	VHT40	Test Freq. (MHz)	5795				
N_{TX}	2	Polarization	V				

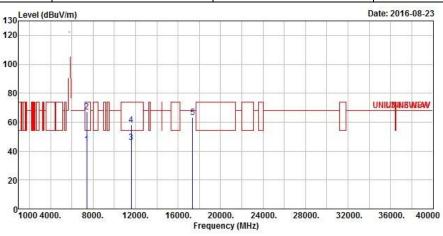

	Freq	Level	Over Limit	Limit Line		Antenna Factor		Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	2
1	7401.000	44.56	-9.44	54.00	36.02	36.34	7.63	35.43	Average
2	7401.000	66.97	-7.03	74.00	58.43	36.34	7.63	35.43	Peak
3	11590.000	46.09	-7.91	54.00	31.71	39.88	9.82	35.32	Average
4	11590.000	57.85	-16.15	74.00	43.47	39.88	9.82	35.32	Peak
5	17385.000	63.25	-4.95	68.20	44.96	41.53	11.91	35.15	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


 SPORTON INTERNATIONAL INC.
 Page No.
 : E35 of E38

 TEL: 886-3-327-3456
 Report Version
 : Rev. 02

 FAX: 886-3-327-0973
 Project No.
 : 651919



Transmitter Radiated Unwanted Emissions (Above 1GHz)							
Modulation Mode	VHT40	Test Freq. (MHz)	5795				
N _{TX}	2	Polarization	Н				

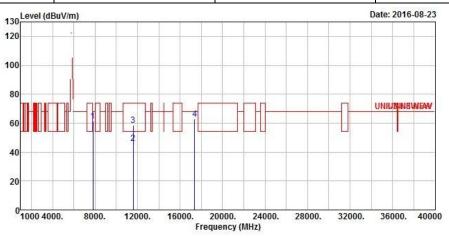

			0ver	Limit	ReadA	Antenna	Cable	Preamp	
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7816.000	61.62	-6.58	68.20	52.32	36.98	7.88	35.56	Peak
2	11590.000	46.07	-7.93	54.00	31.69	39.88	9.82	35.32	Average
3	11590.000	58.29	-15.71	74.00	43.91	39.88	9.82	35.32	Peak
4	17385.000	63.04	-5.16	68.20	44.75	41.53	11.91	35.15	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


 SPORTON INTERNATIONAL INC.
 Page No.
 : E36 of E38

 TEL: 886-3-327-3456
 Report Version
 : Rev. 02

 FAX: 886-3-327-0973
 Project No.
 : 651919



Transmitter Radiated Unwanted Emissions (Above 1GHz)							
Modulation Mode	VHT80	Test Freq. (MHz)	5775				
N_{TX}	2	Polarization	V				

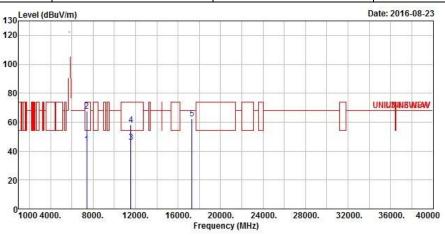

	Freq	Level	Over Limit	Limit Line		Antenna Factor		Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	2
1	7407.000	44.67	-9.33	54.00	36.11	36.36	7.63	35.43	Average
2	7407.000	67.81	-6.19	74.00	59.25	36.36	7.63	35.43	Peak
3	11550.000	46.00	-8.00	54.00	31.53	39.98	9.79	35.30	Average
4	11550.000	58.08	-15.92	74.00	43.61	39.98	9.79	35.30	Peak
5	17325.000	62.38	-5.82	68.20	44.25	41.34	11.92	35.13	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


 SPORTON INTERNATIONAL INC.
 Page No.
 : E37 of E38

 TEL: 886-3-327-3456
 Report Version
 : Rev. 02

 FAX: 886-3-327-0973
 Project No.
 : 651919



Transmitter Radiated Unwanted Emissions (Above 1GHz)							
Modulation Mode	VHT80	Test Freq. (MHz)	5775				
N_{TX}	2	Polarization	Н				

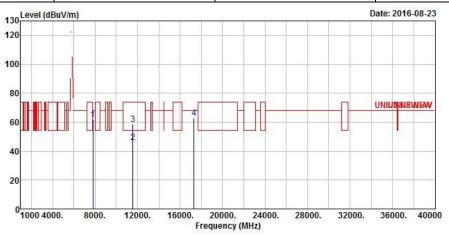

	Frea	l eve1	Over Limit	Limit	ReadAntenna Level Factor			Preamp Factor	Remark	
	,,,,,		LIMIL	Line		, accor	2033	decor	I CHIST K	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		
1	7816.000	61.89	-6.31	68.20	52.59	36.98	7.88	35.56	Peak	
2	11550.000	46.03	-7.97	54.00	31.56	39.98	9.79	35.30	Average	
3	11550.000	58.40	-15.60	74.00	43.93	39.98	9.79	35.30	Peak	
4	17325.000	62.99	-5.21	68.20	44.86	41.34	11.92	35.13	Peak	

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

 SPORTON INTERNATIONAL INC.
 Page No.
 : E38 of E38

 TEL: 886-3-327-3456
 Report Version
 : Rev. 02

 FAX: 886-3-327-0973
 Project No.
 : 651919



FS Result Appendix F

Summary

Mode	Result	Ch	Center	FI	Fh	ppm	Limit	Port	Remark
		(Hz)	(Hz)	(Hz)	(Hz)		(ppm)		
5.2G;11a;20;1;2;5200;M;T0,VN	Pass	5.2G	5.20004379G	NaN	NaN	8.422	20	1	0 min

 SPORTON INTERNATIONAL INC.
 Page No.
 : F1 of F2

 TEL: 886-3-327-3456
 Report Version
 : Rev. 02

 FAX: 886-3-327-0973
 Project No.
 : 651919



FS Result Appendix F

Result

Mode	Result	Ch	Center	FI	Fh	ppm	Limit	Port	Remark
		(Hz)	(Hz)	(Hz)	(Hz)		(ppm)		
5.2G;11a;20;1;2;5200;M;TN,VN	Pass	5.2G	5.2000153G	NaN	NaN	2.942	20	1	0 min
5.2G;11a;20;1;2;5200;M;TN,VN	Pass	5.2G	5.20001532G	NaN	NaN	2.946	20	1	2 min
5.2G;11a;20;1;2;5200;M;TN,VN	Pass	5.2G	5.20001531G	NaN	NaN	2.945	20	1	5 min
5.2G;11a;20;1;2;5200;M;TN,VN	Pass	5.2G	5.20001529G	NaN	NaN	2.94	20	1	10 min
5.2G;11a;20;1;2;5200;M;TN,VL	Pass	5.2G	5.20001521G	NaN	NaN	2.924	20	1	0 min
5.2G;11a;20;1;2;5200;M;TN,VL	Pass	5.2G	5.20001523G	NaN	NaN	2.929	20	1	2 min
5.2G;11a;20;1;2;5200;M;TN,VL	Pass	5.2G	5.20001518G	NaN	NaN	2.919	20	1	5 min
5.2G;11a;20;1;2;5200;M;TN,VL	Pass	5.2G	5.20001519G	NaN	NaN	2.921	20	1	10 min
5.2G;11a;20;1;2;5200;M;TN,VH	Pass	5.2G	5.20001526G	NaN	NaN	2.935	20	1	0 min
5.2G;11a;20;1;2;5200;M;TN,VH	Pass	5.2G	5.20001526G	NaN	NaN	2.935	20	1	2 min
5.2G;11a;20;1;2;5200;M;TN,VH	Pass	5.2G	5.20001525G	NaN	NaN	2.934	20	1	5 min
5.2G;11a;20;1;2;5200;M;TN,VH	Pass	5.2G	5.20001527G	NaN	NaN	2.936	20	1	10 min
5.2G;11a;20;1;2;5200;M;T35,VN	Pass	5.2G	5.19999447G	NaN	NaN	1.063	20	1	0 min
5.2G;11a;20;1;2;5200;M;T35,VN	Pass	5.2G	5.19999445G	NaN	NaN	1.067	20	1	2 min
5.2G;11a;20;1;2;5200;M;T35,VN	Pass	5.2G	5.19999446G	NaN	NaN	1.066	20	1	5 min
5.2G;11a;20;1;2;5200;M;T35,VN	Pass	5.2G	5.19999446G	NaN	NaN	1.065	20	1	10 min
5.2G;11a;20;1;2;5200;M;T30,VN	Pass	5.2G	5.20000126G	NaN	NaN	0.242	20	1	0 min
5.2G;11a;20;1;2;5200;M;T30,VN	Pass	5.2G	5.20000126G	NaN	NaN	0.243	20	1	2 min
5.2G;11a;20;1;2;5200;M;T30,VN	Pass	5.2G	5.2000013G	NaN	NaN	0.25	20	1	5 min
5.2G;11a;20;1;2;5200;M;T30,VN	Pass	5.2G	5.20000129G	NaN	NaN	0.248	20	1	10 min
5.2G;11a;20;1;2;5200;M;T20,VN	Pass	5.2G	5.20001537G	NaN	NaN	2.957	20	1	0 min
5.2G;11a;20;1;2;5200;M;T20,VN	Pass	5.2G	5.20001537G	NaN	NaN	2.956	20	1	2 min
5.2G;11a;20;1;2;5200;M;T20,VN	Pass	5.2G	5.20001536G	NaN	NaN	2.954	20	1	5 min
5.2G;11a;20;1;2;5200;M;T20,VN	Pass	5.2G	5.20001534G	NaN	NaN	2.951	20	1	10 min
5.2G;11a;20;1;2;5200;M;T10,VN	Pass	5.2G	5.20003096G	NaN	NaN	5.954	20	1	0 min
5.2G;11a;20;1;2;5200;M;T10,VN	Pass	5.2G	5.20003098G	NaN	NaN	5.957	20	1	2 min
5.2G;11a;20;1;2;5200;M;T10,VN	Pass	5.2G	5.20003096G	NaN	NaN	5.955	20	1	5 min
5.2G;11a;20;1;2;5200;M;T10,VN	Pass	5.2G	5.20003095G	NaN	NaN	5.951	20	1	10 min
5.2G;11a;20;1;2;5200;M;T0,VN	Pass	5.2G	5.20004379G	NaN	NaN	8.422	20	1	0 min
5.2G;11a;20;1;2;5200;M;T0,VN	Pass	5.2G	5.20004379G	NaN	NaN	8.421	20	1	2 min
5.2G;11a;20;1;2;5200;M;T0,VN	Pass	5.2G	5.20004377G	NaN	NaN	8.418	20	1	5 min
5.2G;11a;20;1;2;5200;M;T0,VN	Pass	5.2G	5.20004374G	NaN	NaN	8.411	20	1	10 min

 SPORTON INTERNATIONAL INC.
 Page No.
 : F2 of F2

 TEL: 886-3-327-3456
 Report Version
 : Rev. 02

 FAX: 886-3-327-0973
 Project No.
 : 651919