



RF TEST REPORT

Applicant TP-LINK TECHNOLOGIES CO., LTD.
FCC ID TE7C5LV1
Brand TP-LINK
Product C5L FDD-LTE Smartphone
Model TP601C
Report No. RXA1511-0187RF04R1
Issue Date December 21, 2015

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15C (2014)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Lingling Kang

Reviewed by: *lingling Kang/Manager*

Kai Xu

Approved by: *Kai Xu/Director*



TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

Table of Contents

| | | |
|---|---|----|
| 1 | Test Laboratory..... | 4 |
| 1.1 | Notes of the Test Report..... | 4 |
| 1.2 | Test facility..... | 4 |
| 1.3 | Testing Location..... | 5 |
| 2 | General Description of Equipment under Test..... | 6 |
| 2.1 | Client Information..... | 6 |
| 2.2 | General information..... | 6 |
| 2.3 | Applied Standards..... | 7 |
| 3 | Information about the FHSS characteristics..... | 8 |
| 3.1 | Pseudorandom Frequency Hopping Sequence..... | 8 |
| 3.2 | Equal Hopping Frequency Use..... | 9 |
| 3.3 | System Receiver Input Bandwidth..... | 9 |
| 4 | Test Information..... | 10 |
| 4.1 | Test Mode..... | 10 |
| 4.2 | Peak Power Output –Conducted..... | 11 |
| 4.3 | Occupied Bandwidth (20dB)..... | 13 |
| 4.4 | Frequency Separation..... | 19 |
| 4.5 | Time of Occupancy (Dwell Time)..... | 22 |
| 4.6 | Band Edge Compliance..... | 29 |
| 4.7 | Spurious Radiated Emissions in the Restricted Band..... | 36 |
| 4.8 | Number of hopping Frequency..... | 42 |
| 4.9 | Spurious RF Conducted Emissions..... | 46 |
| 4.10 | Radiates Emission..... | 54 |
| 4.11 | Conducted Emission..... | 81 |
| 5 | Main Test Instruments..... | 94 |
| ANNEX A: EUT Appearance and Test Setup..... | | 95 |
| A.1 | EUT Appearance..... | 95 |
| A.2 | Test Setup..... | 97 |

Summary of Measurement Results

| Number | Summary of measurements of results | Clause in FCC rules | Verdict |
|--|--|----------------------------|----------------|
| 1 | Peak Power Output -Conducted | 15.247(b)(1) | PASS |
| 2 | Occupied Bandwidth (20dB) | 15.247(a)(1) | PASS |
| 3 | Frequency Separation | 15.247(a)(1) | PASS |
| 4 | Time of Occupancy (Dwell Time) | 15.247(a)(1)(iii) | PASS |
| 5 | Band Edge Compliance | 15.247(d) | PASS |
| 6 | Spurious Radiated Emissions in the restricted band | 15.247(d),15.205,15.209 | PASS |
| 7 | Number of Hopping Frequency | 15.247(a)(1)(iii) | PASS |
| 8 | Spurious RF Conducted Emissions | 15.247(d) | PASS |
| 9 | Radiates Emission | 15.247(d),15.205,15.209 | PASS |
| 10 | AC Power Line Conducted Emission | 15.207 | PASS |
| Date of Testing: November16, 2015~ November 22, 2015 | | | |

1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of TA technology (shanghai) co., Ltd. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above. This report must not be used by the client to claim product certification, approval, or endorsement by CNAS or any government agencies.

1.2 Test facility

CNAS (accreditation number: L2264)

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (recognition number is 428261)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

IC (recognition number is 8510A)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

A2LA(Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2 General Description of Equipment under Test

Client Information

| | |
|-----------------------------|---|
| Applicant | TP-LINK TECHNOLOGIES CO., LTD. |
| Applicant address | Building 24 (floors 1,3,4,5) and 28 (floors1-4) Central Science and Technology Park, Shennan Rd, Nanshan, Shenzhen, China |
| Manufacturer | TP-LINK TECHNOLOGIES CO., LTD. |
| Manufacturer address | Building 24 (floors 1,3,4,5) and 28 (floors1-4) Central Science and Technology Park, Shennan Rd, Nanshan, Shenzhen, China |

Accessory Equipment Details

| Name | Model | Manufacturer | Capacity | S/N |
|---------|-------------|--------------------------------|----------|----------------|
| Battery | NBL-45A2000 | TP-LINK TECHNOLOGIES CO., LTD. | 2000mAh | B1151006100980 |

General information

| | | | |
|---|--|-------------------------|--------|
| Model: | TP601C | | |
| IMEI: | SIM 1: 868788020000031 SIM 2: 868788020001047 | | |
| HW Version: | P1 | | |
| SW Version: | H10S100D03B20151015R1003 | | |
| Power Supply: | Battery/AC adapter | | |
| Antenna Type: | Internal Antenna | | |
| Test Mode(s): | Basic Rate | Enhanced Data Rate(EDR) | |
| Modulation Type: | Frequency Hopping Spread Spectrum (FHSS) | | |
| | GFSK | $\pi/4$ DQPSK | 8DQPSK |
| Packet Type: (Maximum Payload) | DH5 | 2DH5 | 3DH5 |
| Max. Conducted Power | 11.704dBm | | |
| Tested Frequency Range(s): | 2400 ~ 2483.5 MHz | | |
| Note: 1. The information of the EUT is declared by the manufacturer. Please refer to the specifications or user manual for details. | | | |



2.1 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards

FCC CFR47 Part 15C (2014) Radio Frequency Devices

ANSI C63.4 (2014)

DA00-705 Filing and Frequency Measurement Guidelines For Frequency Hopping Spread Spectrum System.(2000)


3 Information about the FHSS characteristics

3.1 Pseudorandom Frequency Hopping Sequence

Frequency Hopping Systems. A spread spectrum system in which the carrier is modulated with the coded information in a conventional manner causing a conventional spreading of the RF energy about the frequency carrier. The frequency of the carrier is not fixed but changes at fixed intervals under the direction of a coded sequence. The wide RF bandwidth needed by such a system is not required by spreading of the RF energy about the carrier but rather to accommodate the range of frequencies to which the carrier frequency can hop. The test of a frequency hopping system is that the near term distribution of hops appears random, the long term distribution appears evenly distributed over the hop set, and sequential hops are randomly distributed in both direction and magnitude of change in the hop set.

The selection scheme chooses a segment of 32 hop frequencies spanning about 64 MHz and visits these hops in a pseudo-random order. Next, a different 32-hop segment is chosen, etc. In the page, master page response, slave page response, page scan, inquiry, inquiry response and inquiry scan hopping sequences, the same 32-hop segment is used all the time (the segment is selected by the address; different devices will have different paging segments).

When the basic channel hopping sequence is selected, the output constitutes a pseudo-random sequence that slides through the 79 hops. The principle is depicted in the figure below.

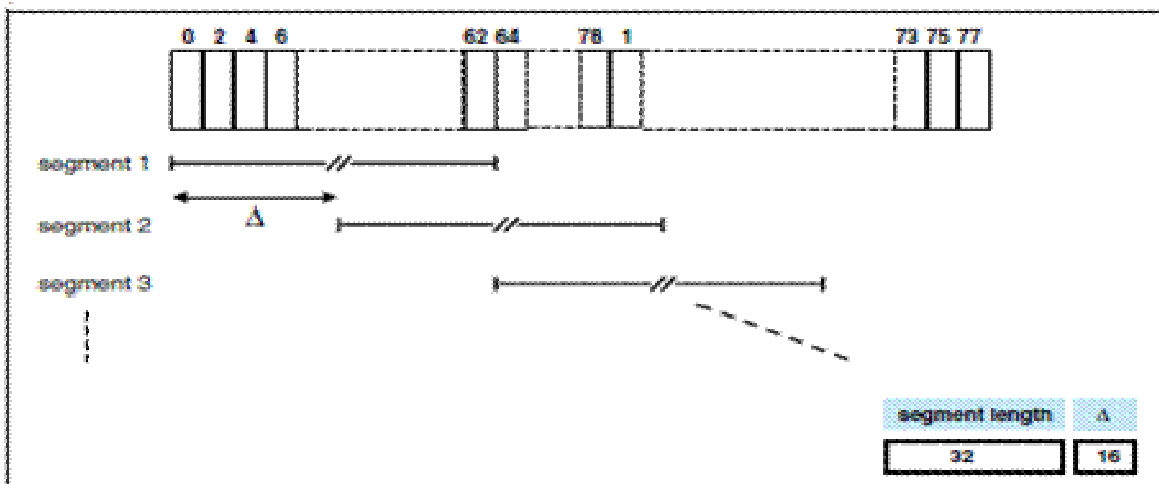

Hop selection scheme in CONNECTION state.

Pseudorandom Frequency Hopping Sequence Table as below:

Channel: 08, 24, 40, 56, 40, 56, 72, 09, 01, 09, 33, 41, 33, 41, 65, 73, 53, 69, 06, 22, 04, 20, 36, 52, 38, 46, 70, 78, 68, 76, 21, 29, 10, 26, 42, 58, 44, 60, 76, 13, 03, 11, 35, 43, 37, 45, 69, 77, 55, 71, 08, 24, 08, 24, 40, 56, 40, 48, 72, 01, 72, 01, 25, 33, 12, 28, 44, 60, 42, 58, 74, 11, 05, 13, 37, 45, etc.

Each frequency used equally on the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

3.2 Equal Hopping Frequency Use

All Bluetooth units participating in the Pico net are time and hop-synchronized to the channel. Each new transmission event begins on the next channel in the hopping sequence after the final channel used in the previous transmission event.

3.3 System Receiver Input Bandwidth

Each channel bandwidth is 1MHz. The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

4 Test Information

4.1 Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

| Test Modes | | |
|------------|-------------------------------|---|
| Band | Radiated Test Cases | Conducted Test Cases |
| BT | 3DH5 8DQPSK (Channel 0/39/78) | DH5 GFSK(Channel 0/39/78) 2DH5 $\pi/4$ -DQPSK(Channel 0/39/78) 3DH5 8DQPSK(Channel 0/39/78) |

Note: The maximum RF output power levels are 3DH5 for 8DQPSK modulation, For RSE and CSE, only the maximum RF output power is chosen.

4.2 Peak Power Output –Conducted


Ambient condition

| | | |
|-------------|-------------------|----------|
| Temperature | Relative humidity | Pressure |
| 23°C ~25°C | 45%~50% | 101.5kPa |

Methods of Measurement

During the process of the testing, The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss. The EUT is controlled by the Bluetooth test set to ensure max power transmission with proper modulation. The peak detector is used. RBW is set to 2 MHz; VBW is set to 6 MHz. These measurements have been tested at following channels: 0, 39, and 78.

Test Setup

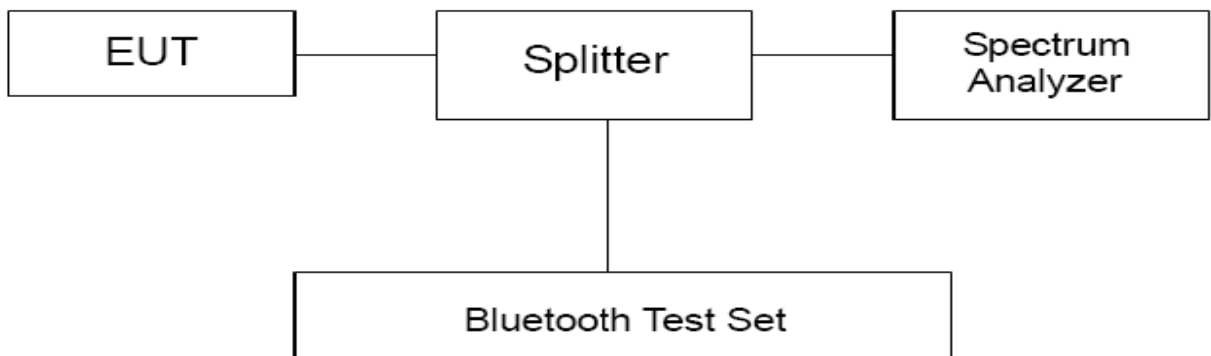

Limits

Rule Part 15.247 (b) (1) specifies that " For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts."

| | |
|-------------------|------------------|
| Peak Output Power | ≤ 0.125W (21dBm) |
|-------------------|------------------|

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U=0.44$ dB.

**Test Results**

| Channel | Frequency (MHz) | Peak Output Power (dBm) | | | Conclusion |
|---------|-----------------|-------------------------|--------|--------|------------|
| | | DH5 | 2DH5 | 3DH5 | |
| 0 | 2402 | 11.285 | 11.498 | 11.704 | PASS |
| 39 | 2441 | 11.035 | 11.423 | 11.402 | PASS |
| 78 | 2480 | 10.993 | 11.405 | 11.415 | PASS |

Note: The measured power density (dBm) has the offset with cable loss already.

4.3 Occupied Bandwidth (20dB)


Ambient condition

| | | |
|-------------|-------------------|----------|
| Temperature | Relative humidity | Pressure |
| 23°C ~25°C | 45%~50% | 101.5kPa |

Method of Measurement

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss. The occupied bandwidth is measured using spectrum analyzer. RBW is set to 20kHz and VBW is set to 62kHz on spectrum analyzer. -20dB occupied bandwidths are recorded.

Test Setup

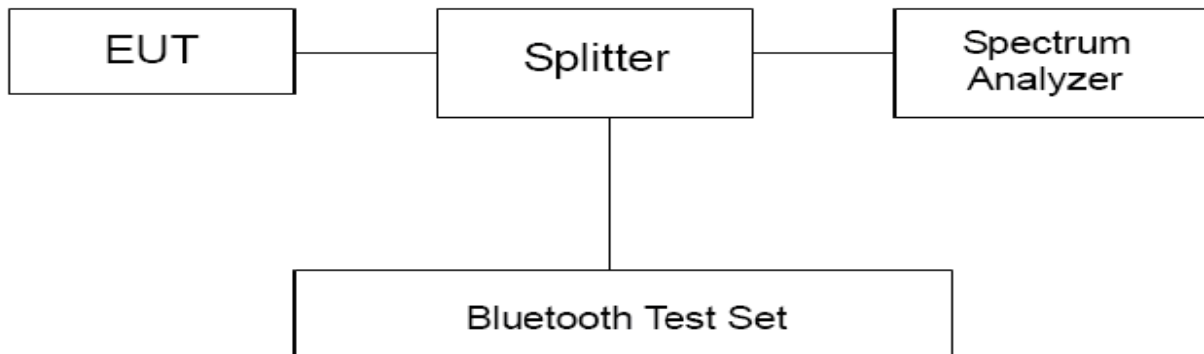

Limits

No specific occupied bandwidth requirements in part 15.247(a) (1).

Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U=936$ Hz.

Test Results


| Mode | Channel | Frequency (MHz) | 20dB Bandwidth(kHz) |
|------|---------|-----------------|---------------------|
| DH5 | 0 | 2402 | 1033 |
| DH5 | 39 | 2441 | 1033 |
| DH5 | 78 | 2480 | 1032 |
| 2DH5 | 0 | 2402 | 1089 |
| 2DH5 | 39 | 2441 | 1086 |
| 2DH5 | 78 | 2480 | 1092 |
| 3DH5 | 0 | 2402 | 1175 |
| 3DH5 | 39 | 2441 | 1180 |
| 3DH5 | 78 | 2480 | 1174 |



Carrier frequency (MHz): 2402
Channel No.:0

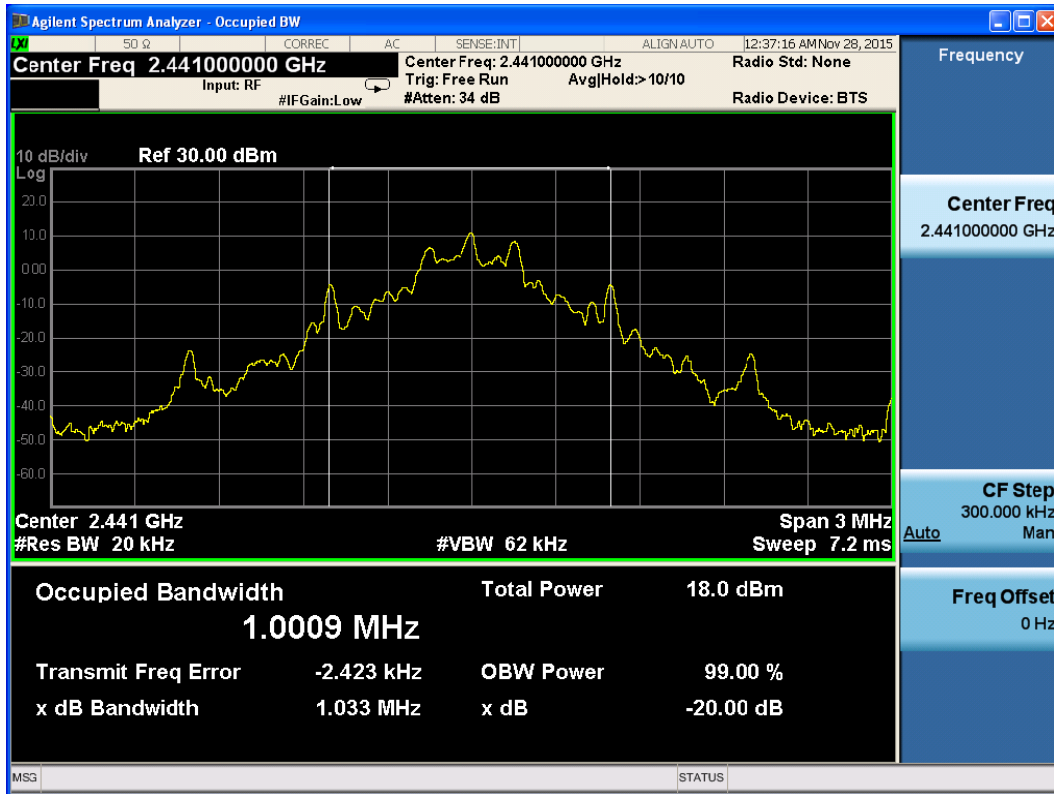

Carrier frequency (MHz): 2441
Channel No.:39

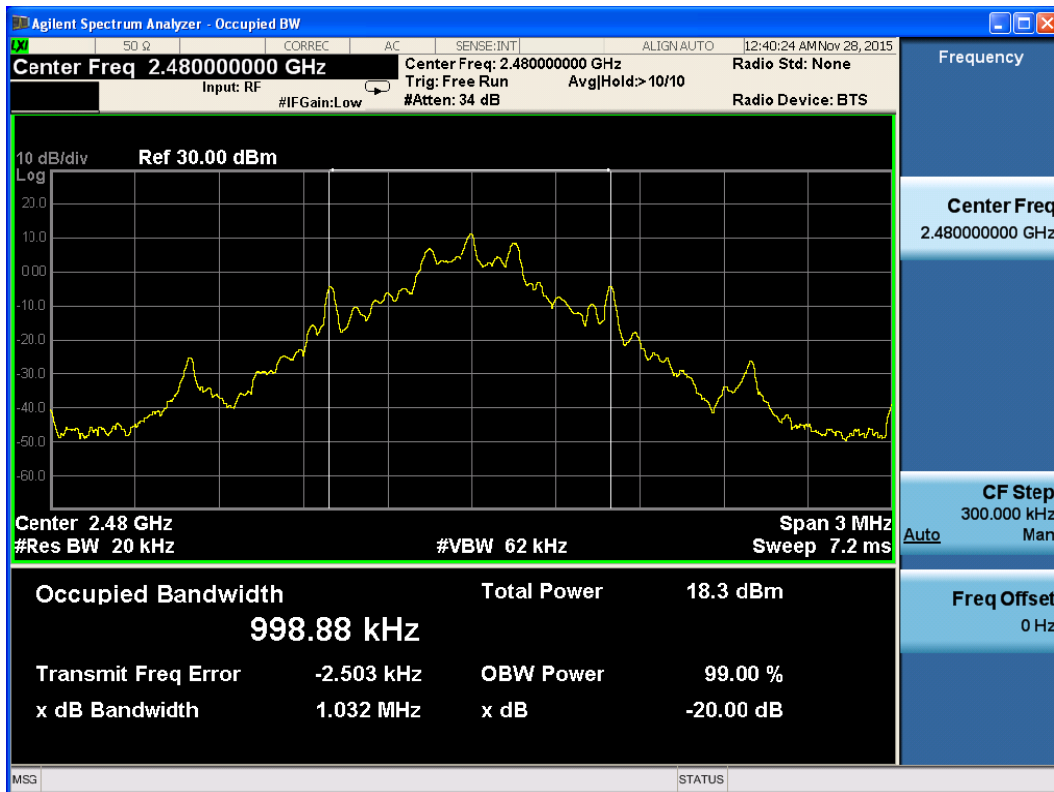

Carrier frequency (MHz): 2480
Channel No.:78




Carrier frequency (MHz): 2402

Channel No.:0




Carrier frequency (MHz): 2441


Channel No.:39

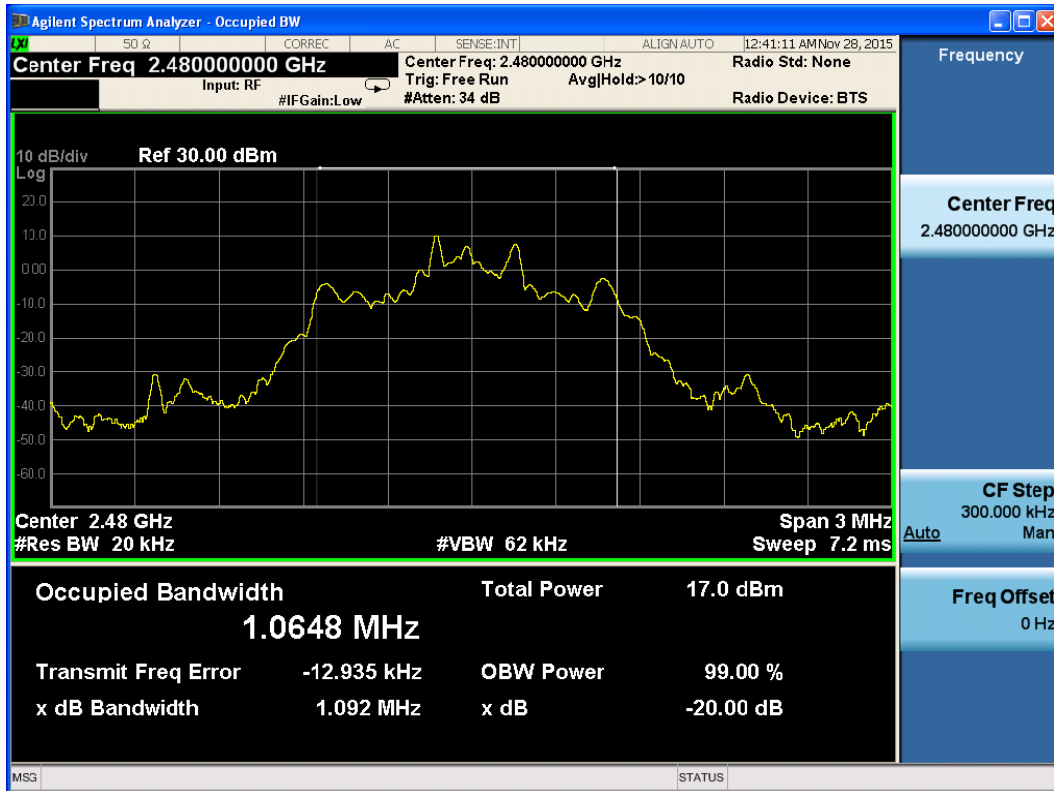


Carrier frequency (MHz): 2480
 Channel No.:78

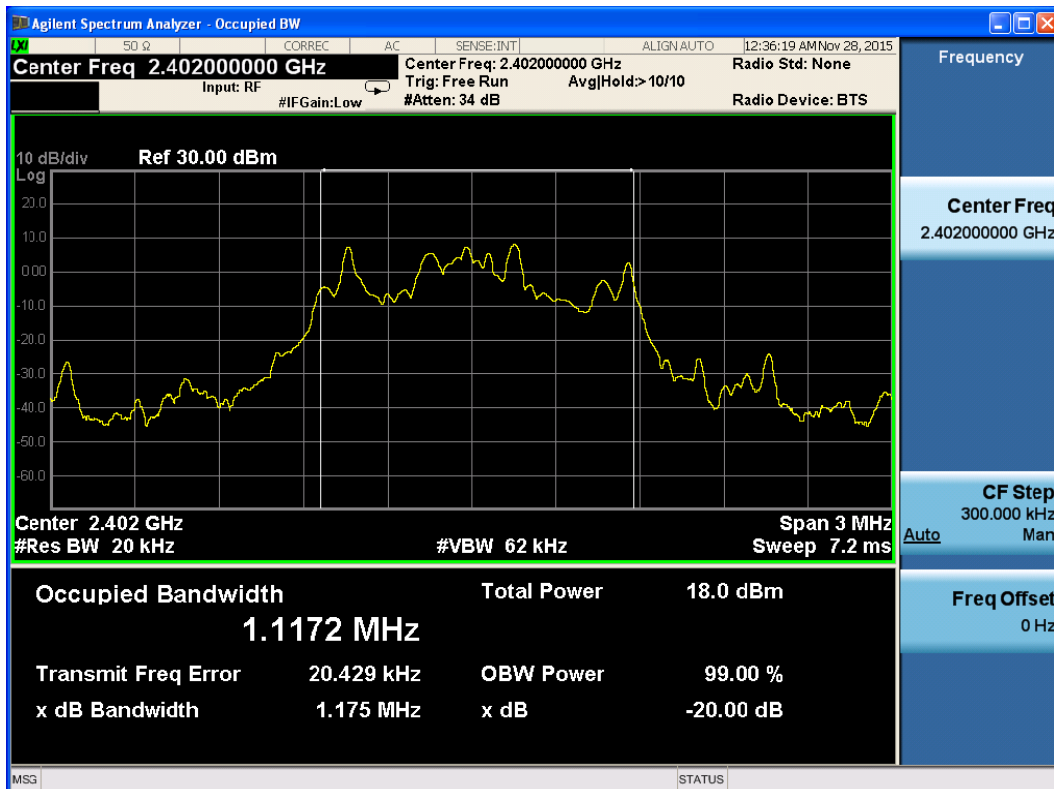

Carrier frequency (MHz): 2402
 Channel No.:0

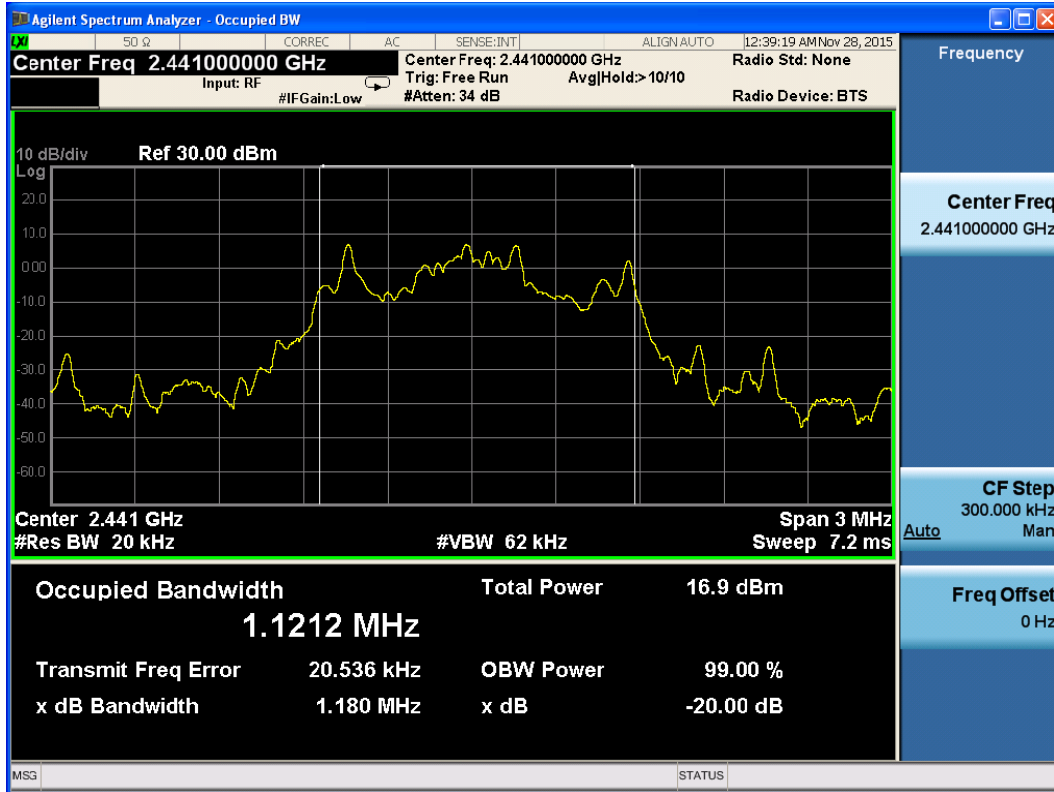

Carrier frequency (MHz): 2441
Channel No.:39

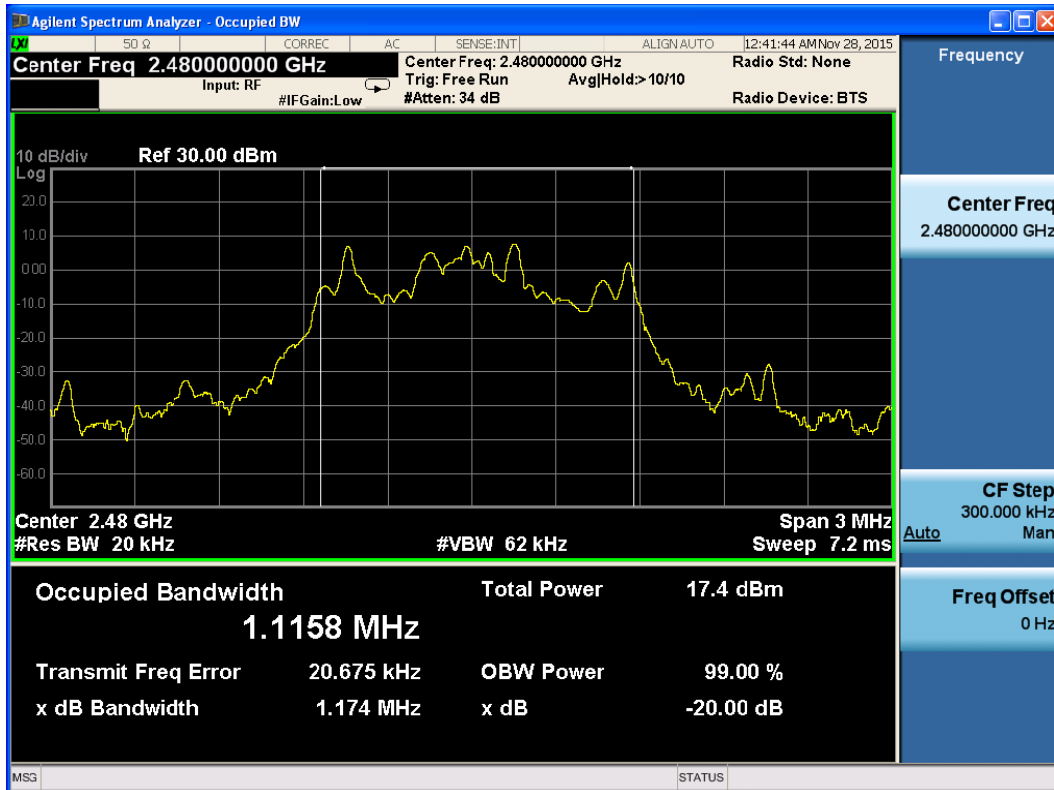

Carrier frequency (MHz): 2480
Channel No.:78

4.4 Frequency Separation


Ambient condition

| | | |
|-------------|-------------------|----------|
| Temperature | Relative humidity | Pressure |
| 23°C ~25°C | 45%~50% | 101.5kPa |

Method of Measurement

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss. RBW is set to 30 kHz and VBW is set to 3MHz on spectrum analyzer. Set EUT on Hopping on mode.

Test setup

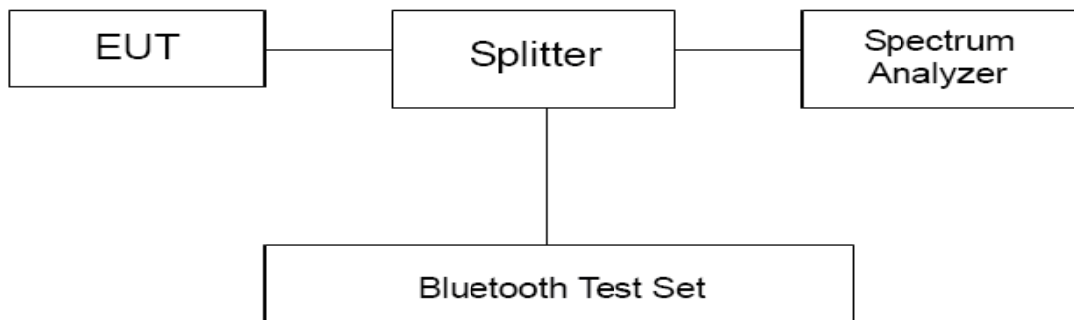

Limits

Rule Part 15.247(a)(1) specifies that “Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. ”

Note: The value of two-thirds of 20 dB bandwidth is always greater than 25 kHz.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U=936$ Hz.


Test Results:

| Packet type | Carrier frequency (MHz) | Carrier frequency separation(kHz) | 20dB Bandwidth(kHz) | Limit (kHz) | Conclusion |
|-------------|-------------------------|-----------------------------------|---------------------|-------------|------------|
| DH5 | 2441 | 1002 | 1033 | 688.67 | PASS |
| 2DH5 | 2441 | 999 | 1086 | 724.00 | PASS |
| 3DH5 | 2441 | 1002 | 1180 | 786.67 | PASS |


Note: The limit is two-thirds of 20 dB bandwidth.



DH5 Carrier frequency (MHz): 2441

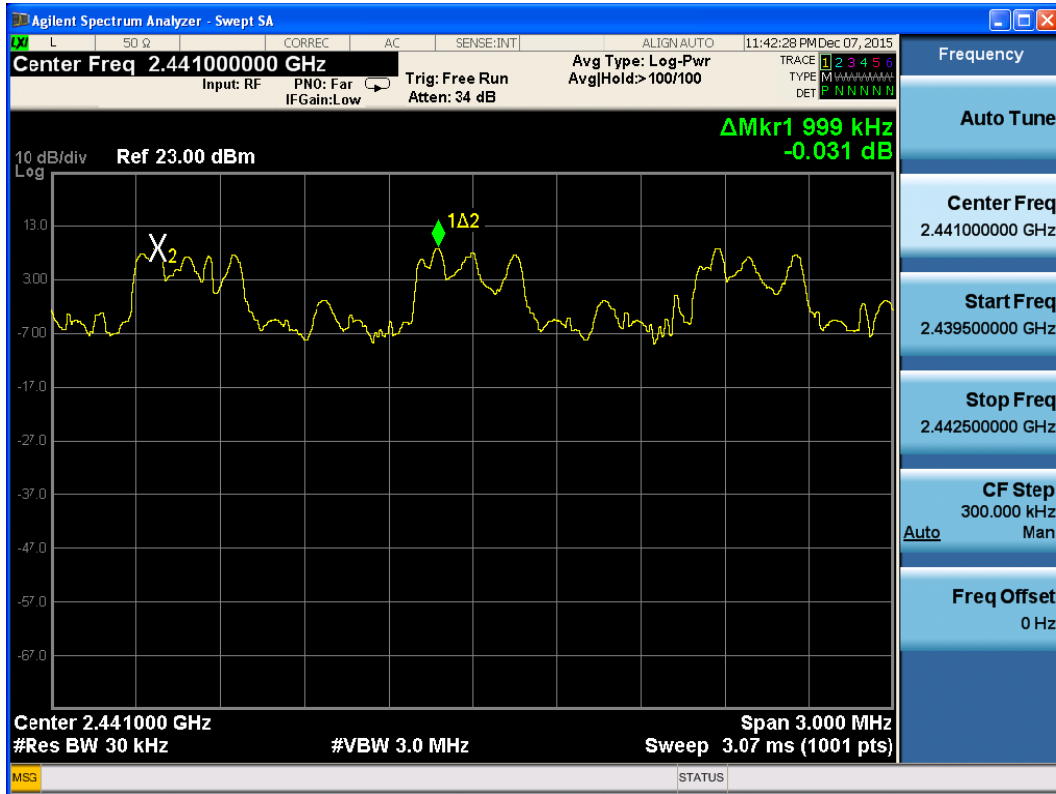

2DH5 Carrier frequency (MHz): 2441

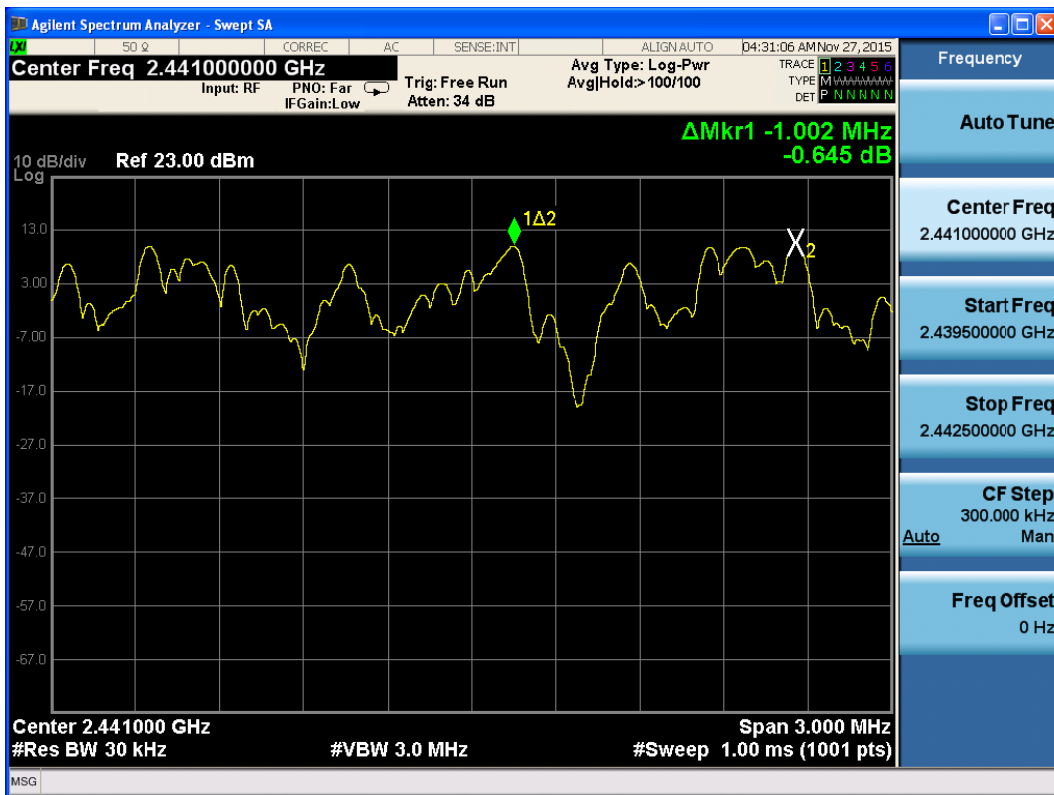

3DH5 Carrier frequency (MHz): 2441

4.5 Time of Occupancy (Dwell Time)

Ambient condition

| | | |
|-------------|-------------------|----------|
| Temperature | Relative humidity | Pressure |
| 23°C ~25°C | 45%~50% | 101.5kPa |


Methods of Measurement

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss. RBW is set to 1MHz and VBW is set to 3MHz on spectrum analyzer .The time slot length is measured of three different packet types, which are available in the Bluetooth technology. Those are DH1, DH3 and DH5 packets. The dwell time is calculated by:

Dwell time = time slot length * hop rate * 0.4s with:

- hop rate=1600 * 1/s for DH1 packet =1600
- hop rate=1600/3 * 1/s for DH3 packet =533.33
- hop rate=1600/5 * 1/s for DH5 packet =320

Test Setup

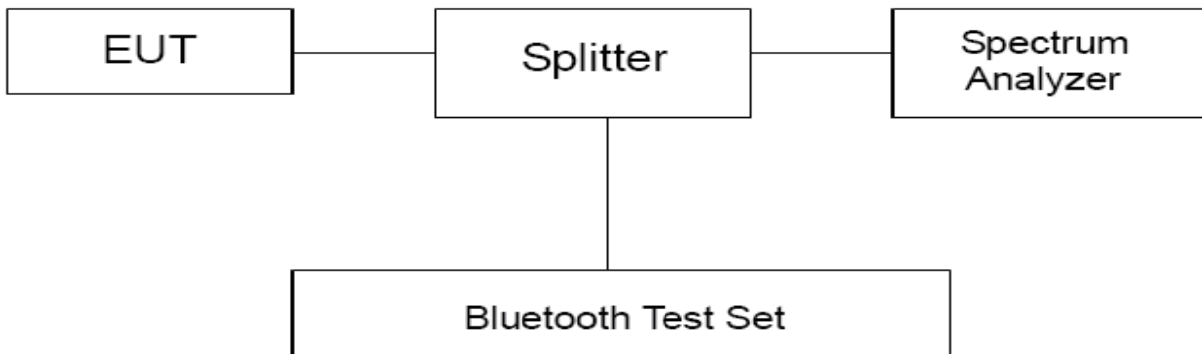

Limits

Rule Part 22.913(a) specifies that " Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed."

| | |
|------------|---------|
| Dwell time | ≤ 400ms |
|------------|---------|

Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$.

| Requirements | Uncertainty | |
|--------------|-------------|-------------------|
| Dwell Time | DH1 | $U=0.64\text{ms}$ |
| | DH3 | $U=0.80\text{ms}$ |
| | DH5 | $U=0.70\text{ms}$ |
| | 2DH1 | $U=0.64\text{ms}$ |
| | 2DH3 | $U=0.80\text{ms}$ |
| | 2DH5 | $U=0.70\text{ms}$ |
| | 3DH1 | $U=0.64\text{ms}$ |
| | 3DH3 | $U=0.80\text{ms}$ |
| | 3DH5 | $U=0.70\text{ms}$ |


Test Results:

| Channel 39 | | | | | |
|-------------|----------------|----------------------|-----------------|------------|------------|
| Packet type | hop rate (1/s) | Time slot length(ms) | Dwell time (ms) | Limit (ms) | Conclusion |
| DH1 | 1600 | 0.36 | 230.40 | 400 | PASS |
| DH3 | 533.33 | 1.62 | 345.60 | 400 | PASS |
| DH5 | 320 | 2.87 | 367.36 | 400 | PASS |
| 2DH1 | 1600 | 0.36 | 230.40 | 400 | PASS |
| 2DH3 | 533.33 | 1.61 | 343.46 | 400 | PASS |
| 2DH5 | 320 | 2.86 | 366.08 | 400 | PASS |
| 3DH1 | 1600 | 0.38 | 243.20 | 400 | PASS |
| 3DH3 | 533.33 | 1.62 | 345.60 | 400 | PASS |
| 3DH5 | 320 | 2.88 | 368.64 | 400 | PASS |


Note: Dwell time = time slot length * hop rate * 0.4s

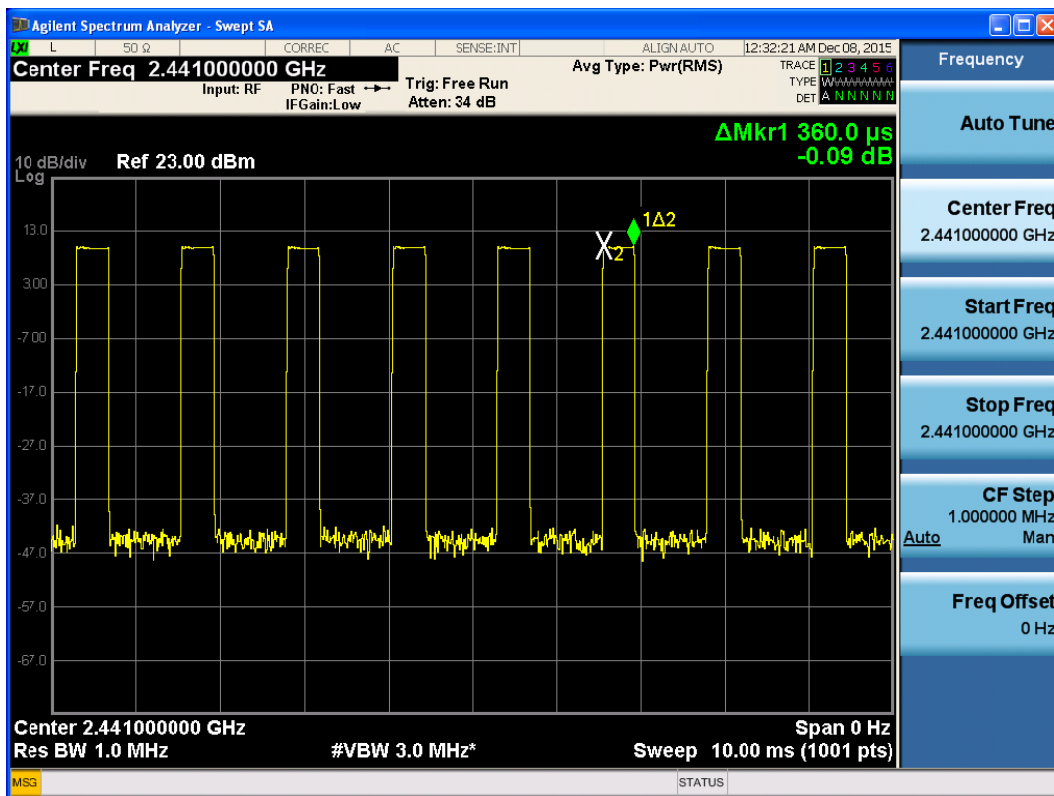


Carrier frequency (MHz): 2441, DH1

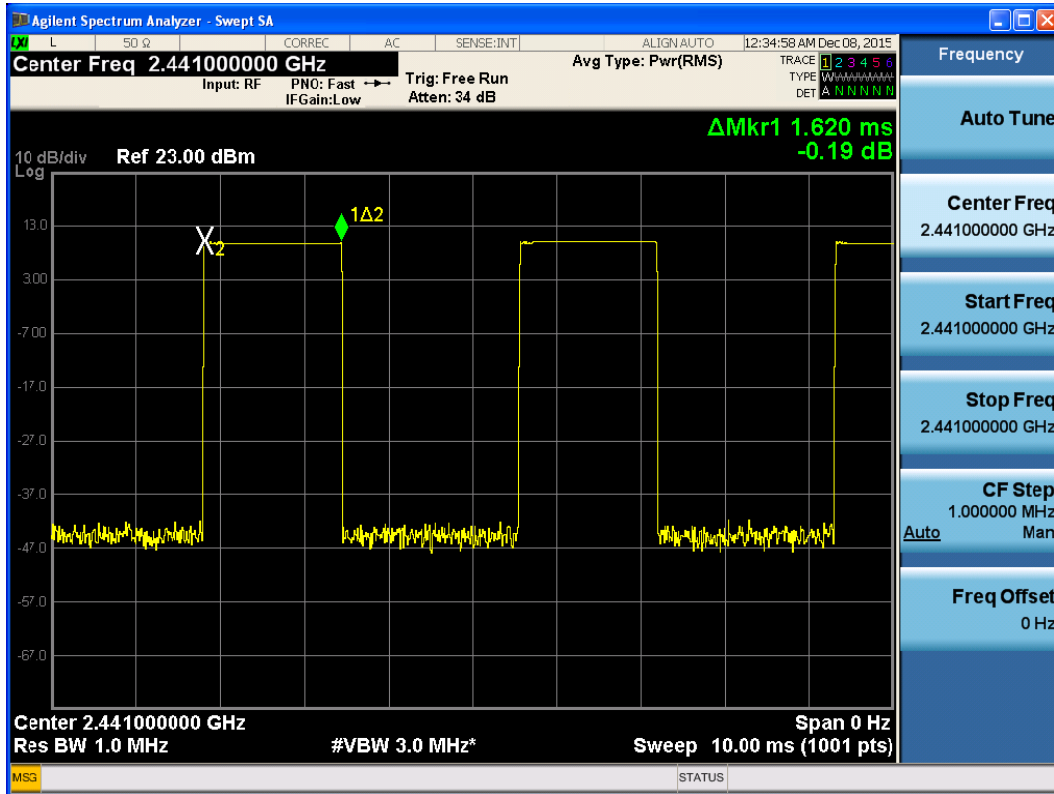


Carrier frequency (MHz): 2441, DH3

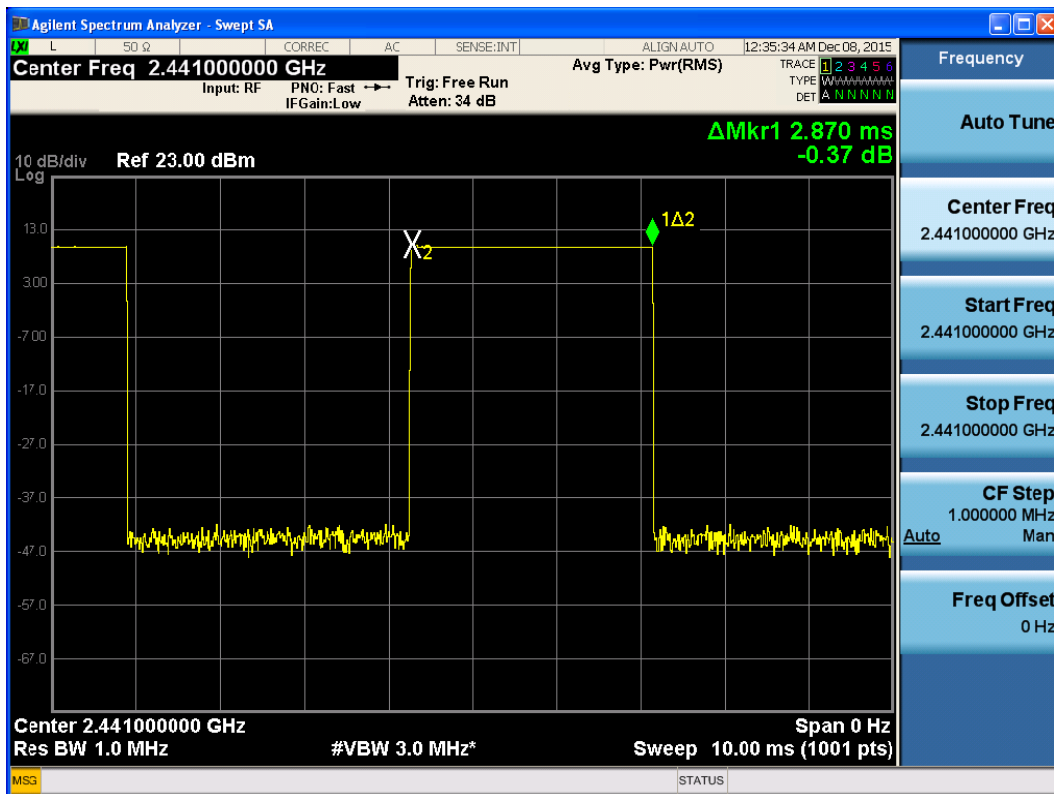


Carrier frequency (MHz): 2441, DH5

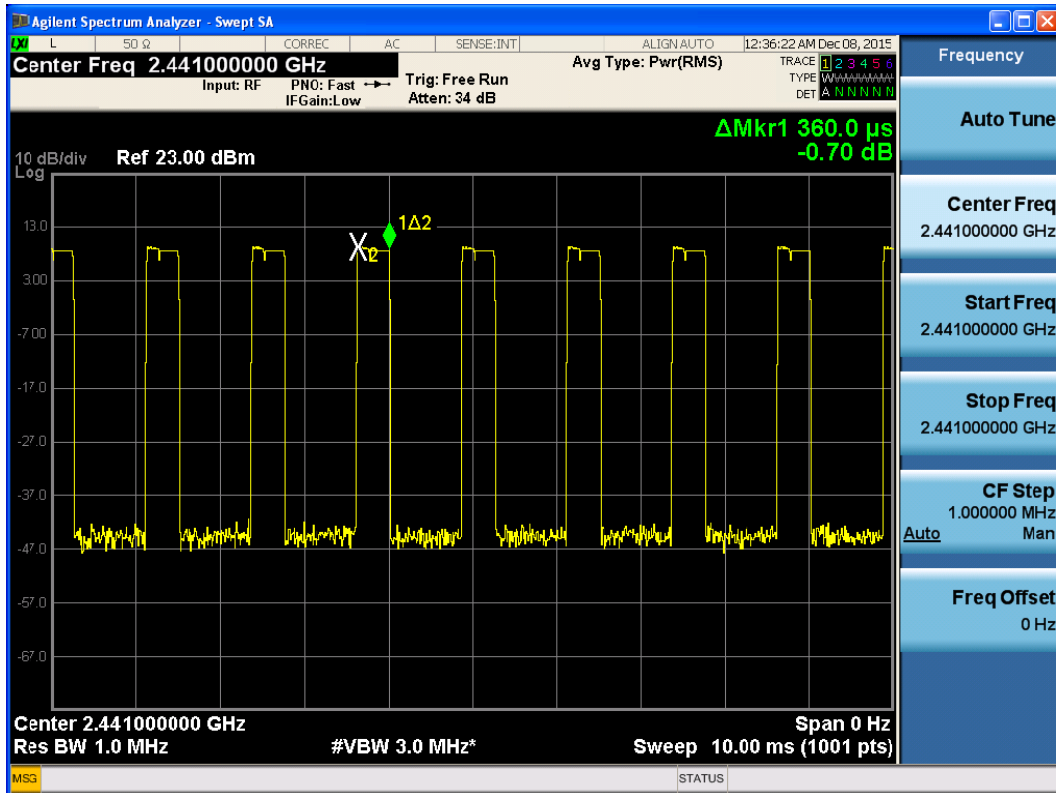


Carrier frequency (MHz): 2441, 2DH1

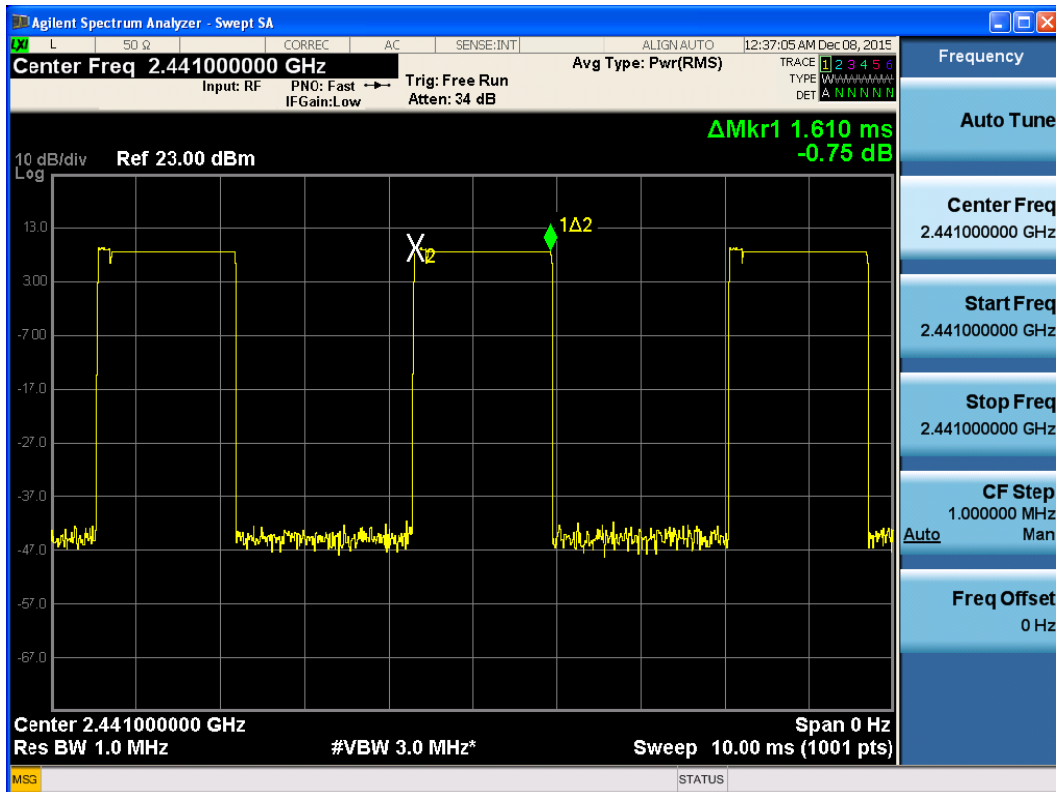


Carrier frequency (MHz): 2441, 2DH3

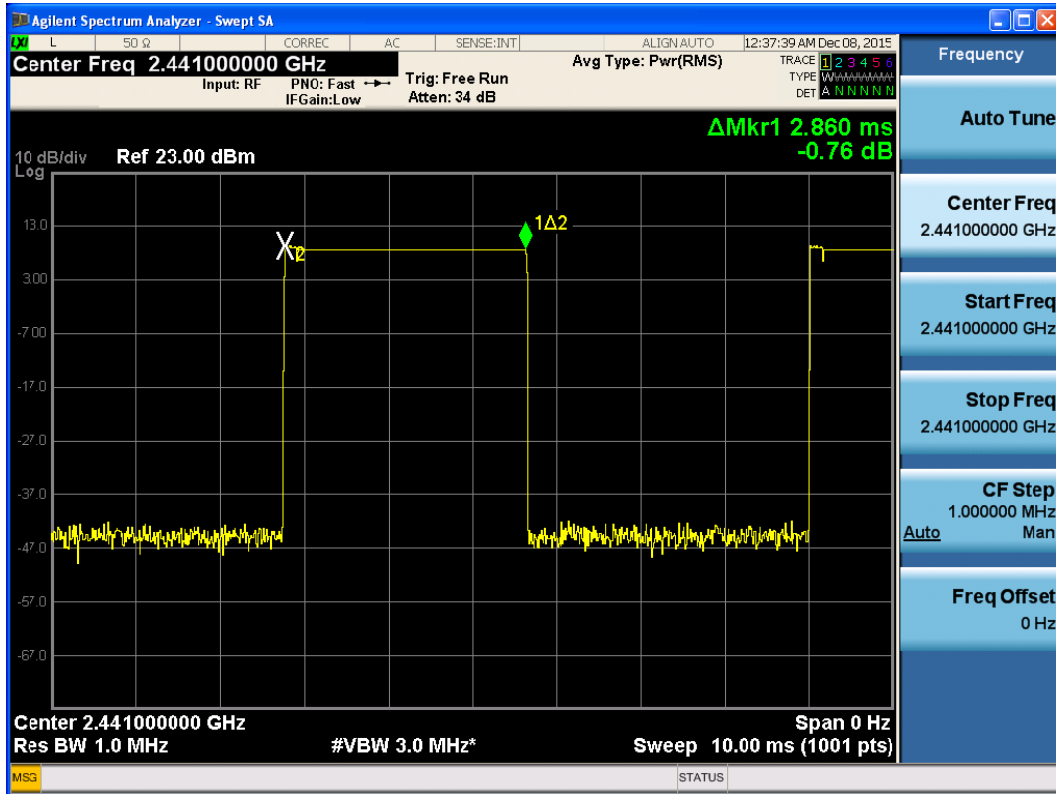


Carrier frequency (MHz): 2441, 2DH5

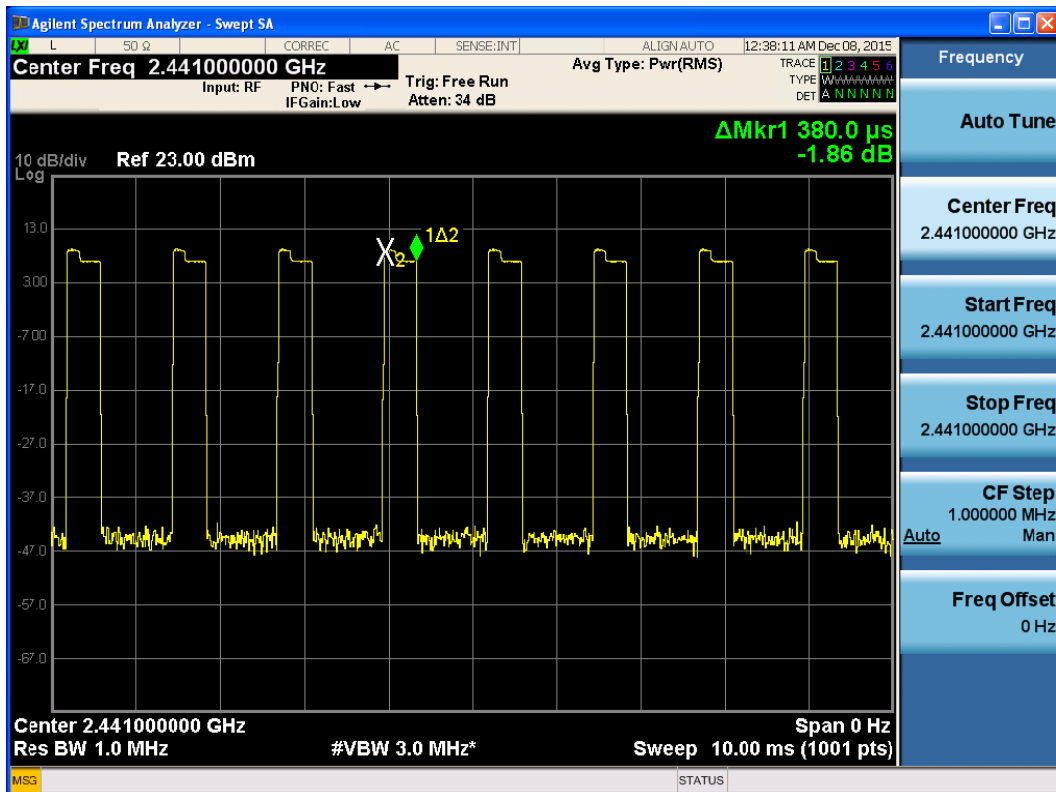

Carrier frequency (MHz): 2441, 3DH1

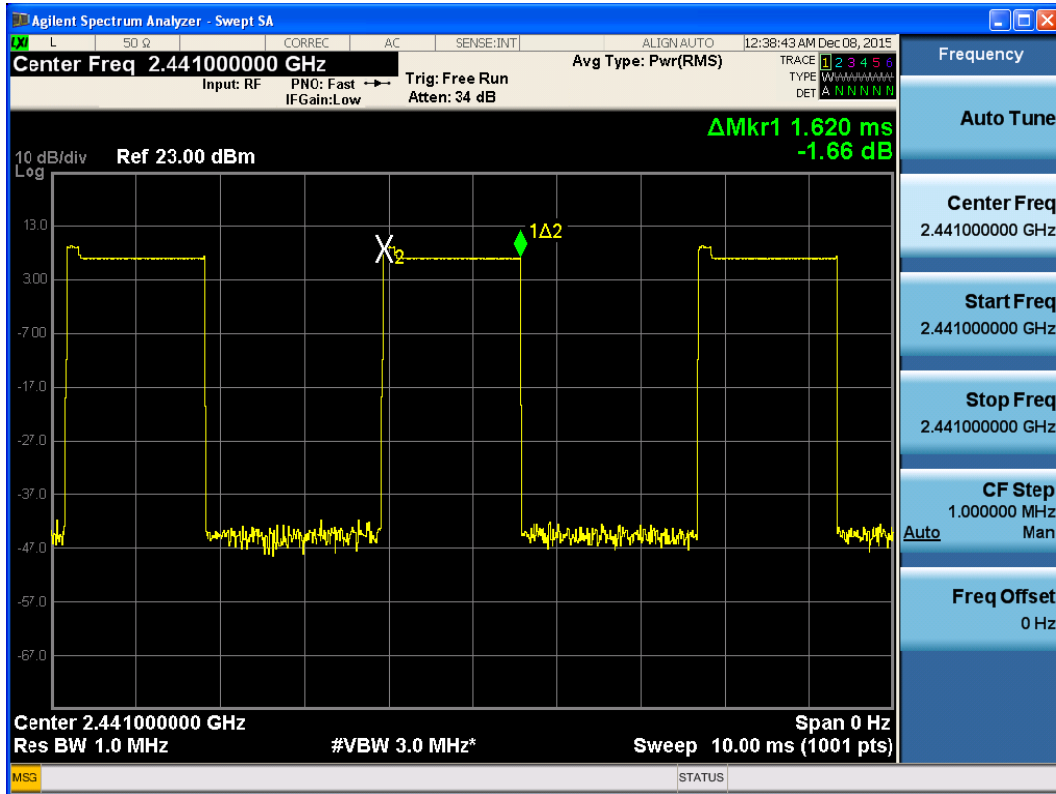

Carrier frequency (MHz): 2441, 3DH3

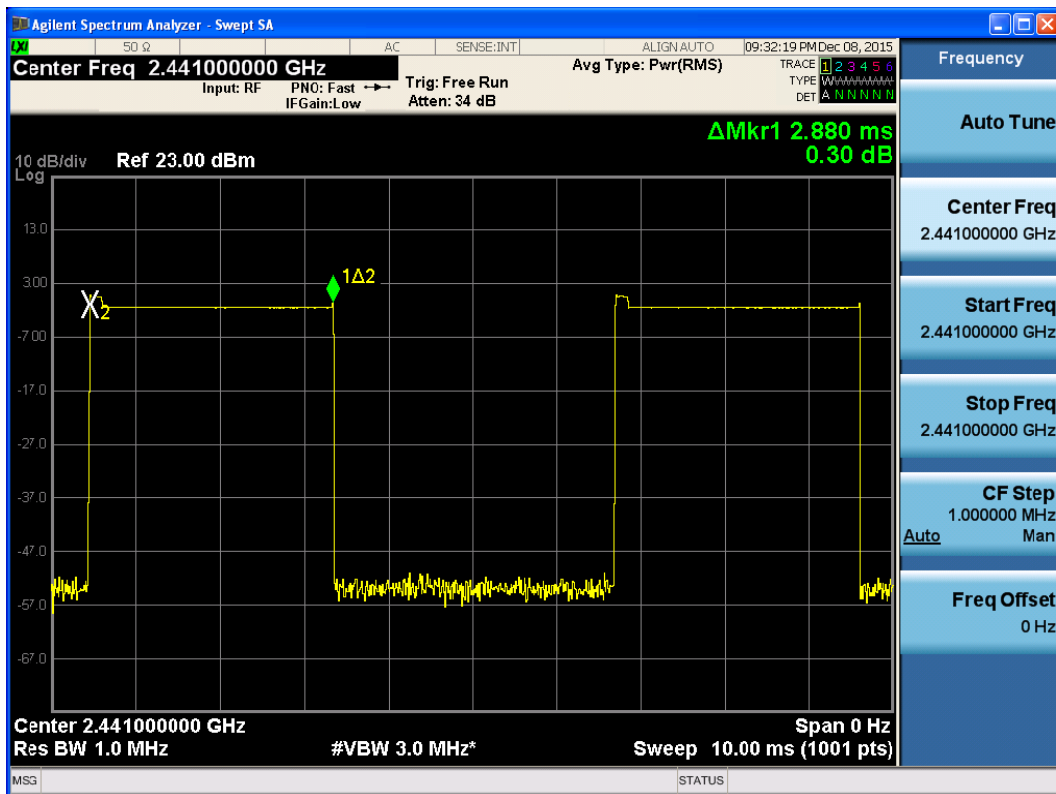

Carrier frequency (MHz): 2441, 3DH5

4.6 Band Edge Compliance


Ambient condition

| | | |
|-------------|-------------------|----------|
| Temperature | Relative humidity | Pressure |
| 23°C ~25°C | 45%~50% | 101.5kPa |

Method of Measurement

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss. The lowest and highest channels were measured. The peak detector is used. RBW is set to 100 kHz and VBW is set to 300 kHz on spectrum analyzer. EUT test for Hopping On mode and Hopping Off mode.

Test Setup

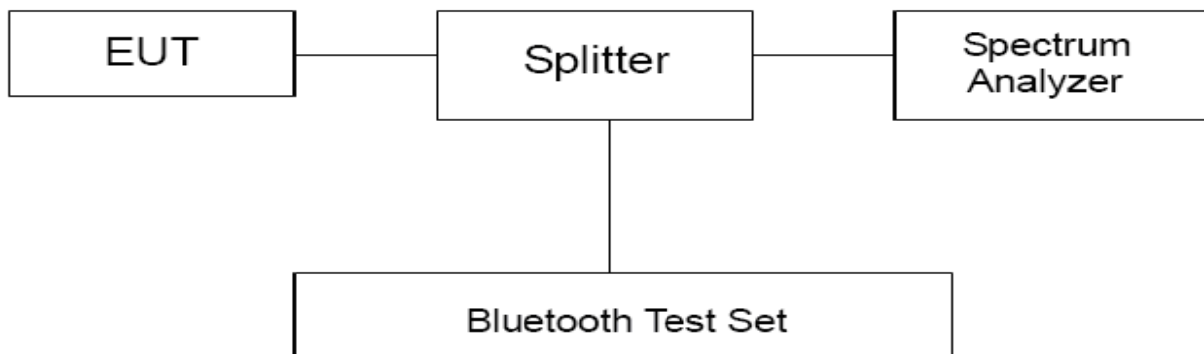

Limits

Rule Part 15.247(d) specifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.”

Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

| Frequency | Uncertainty |
|-----------|-------------|
| 2GHz-3GHz | 1.407 dB |




Test Results

Hopping On-DH5

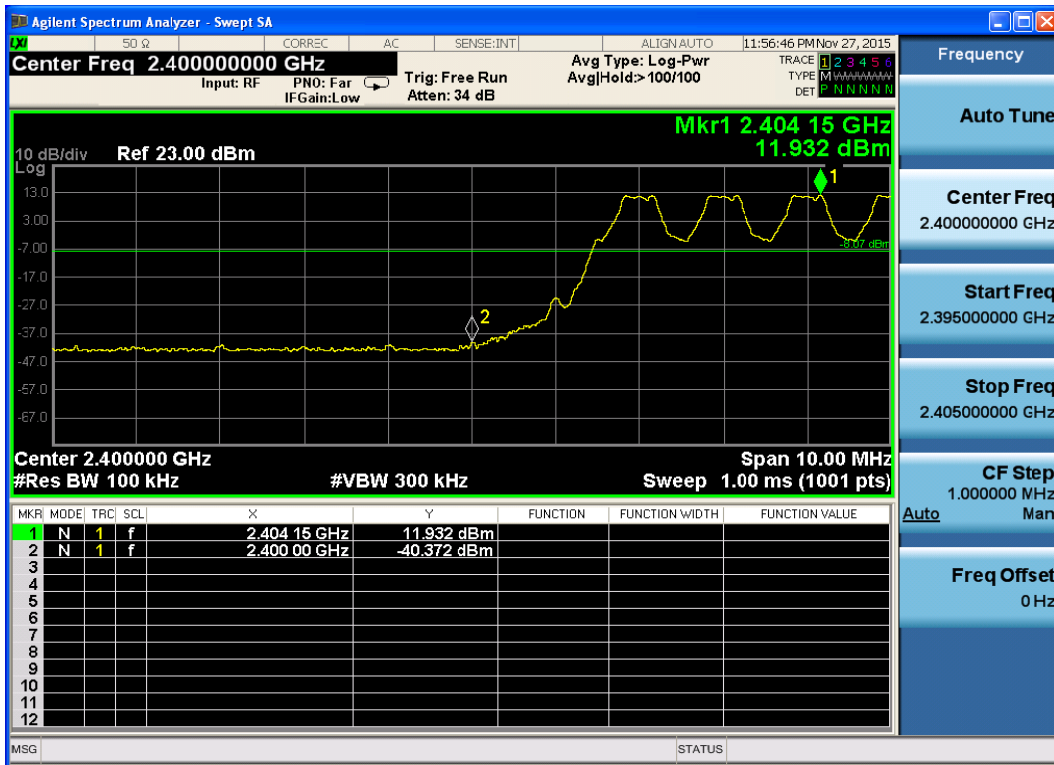

Carrier frequency (MHz): 2402

Channel No.:0

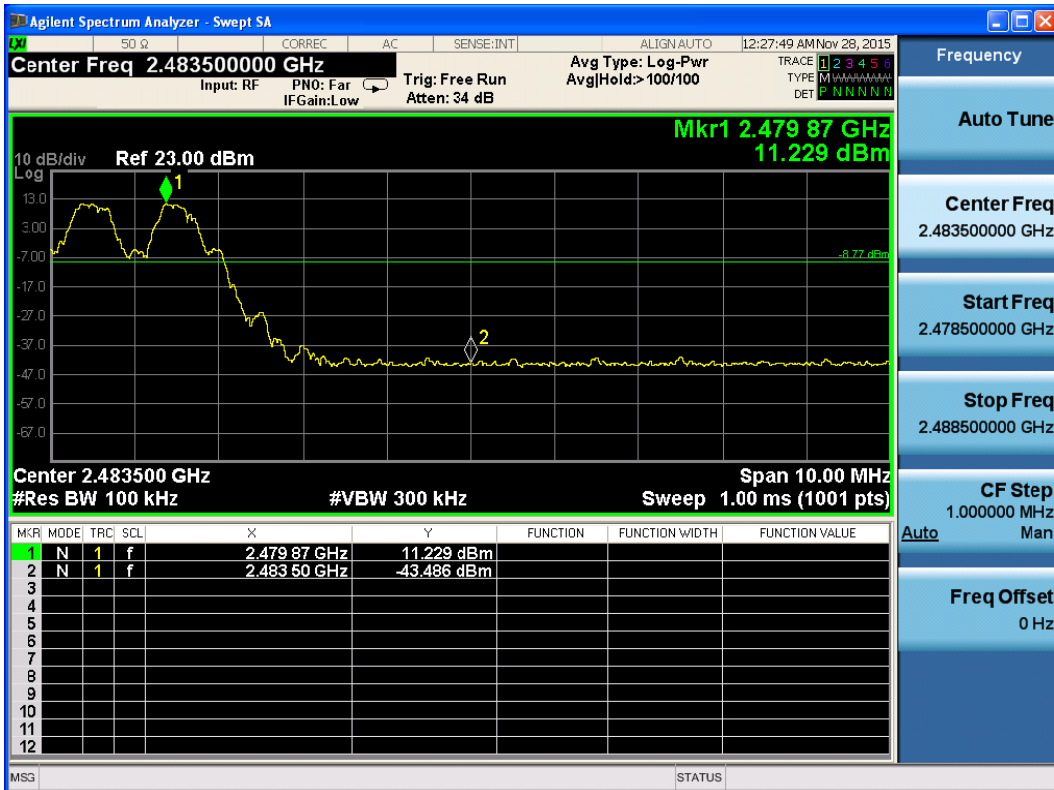


Carrier frequency (MHz): 2480

Channel No.:78




Hopping On-2DH5

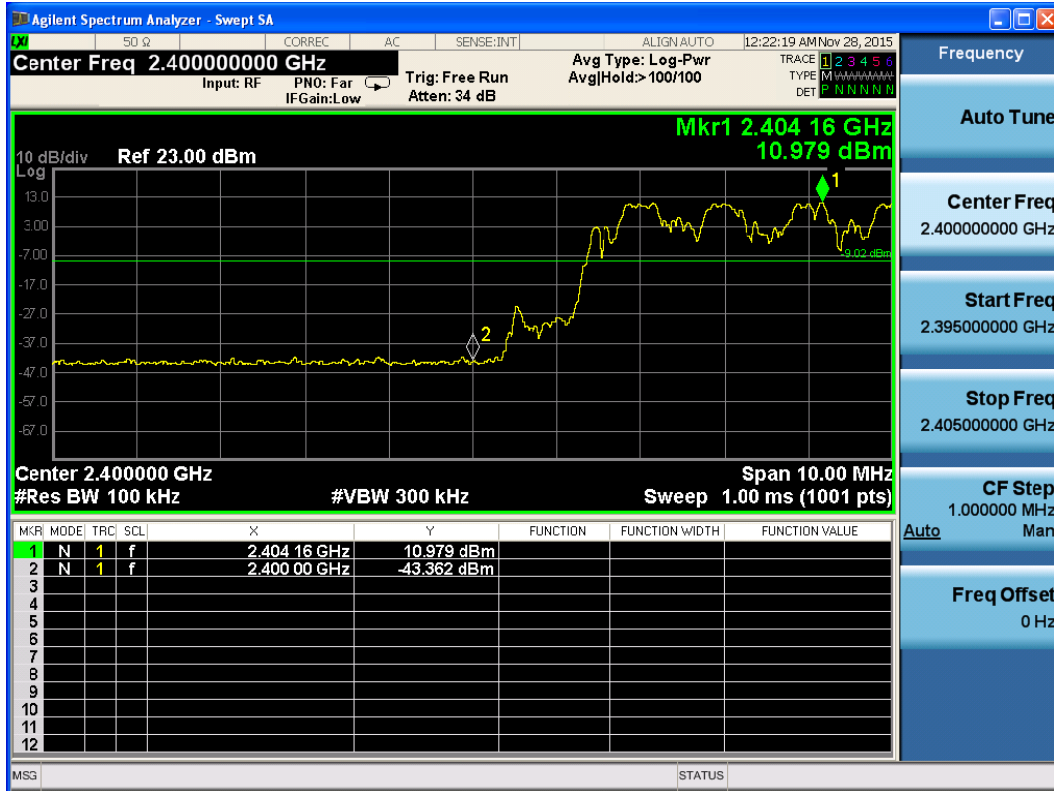

Carrier frequency (MHz): 2402

Channel No.:0

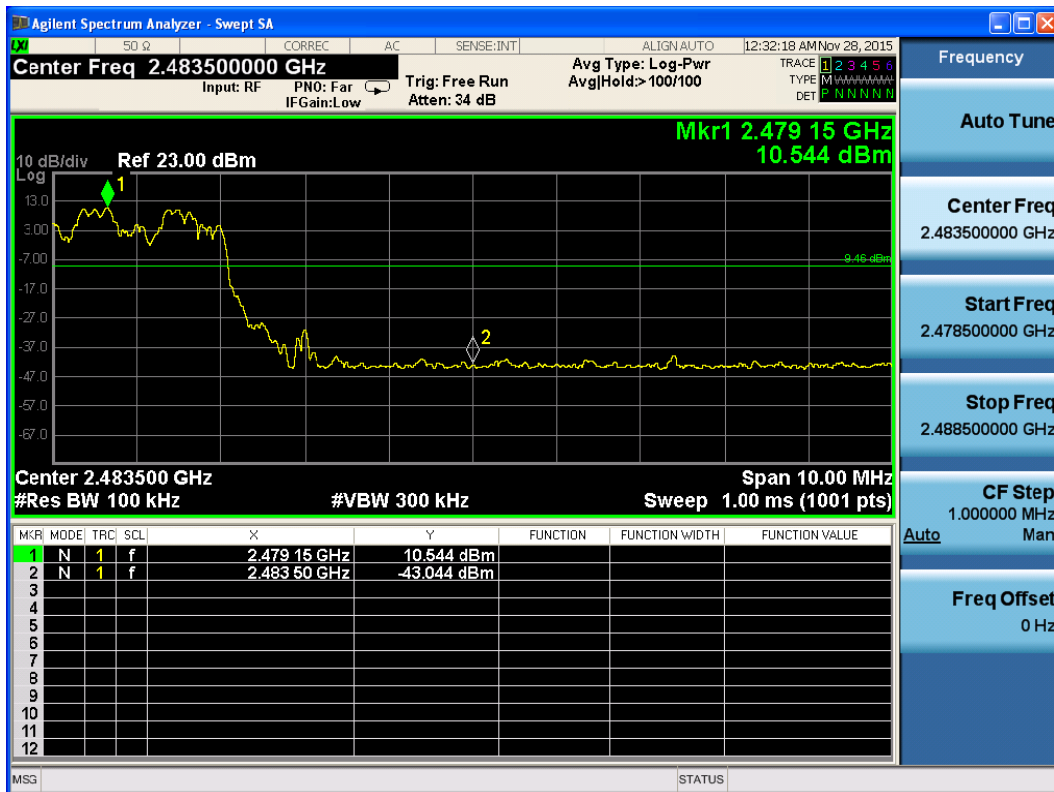


Carrier frequency (MHz): 2480

Channel No.:78



Hopping On-3DH5

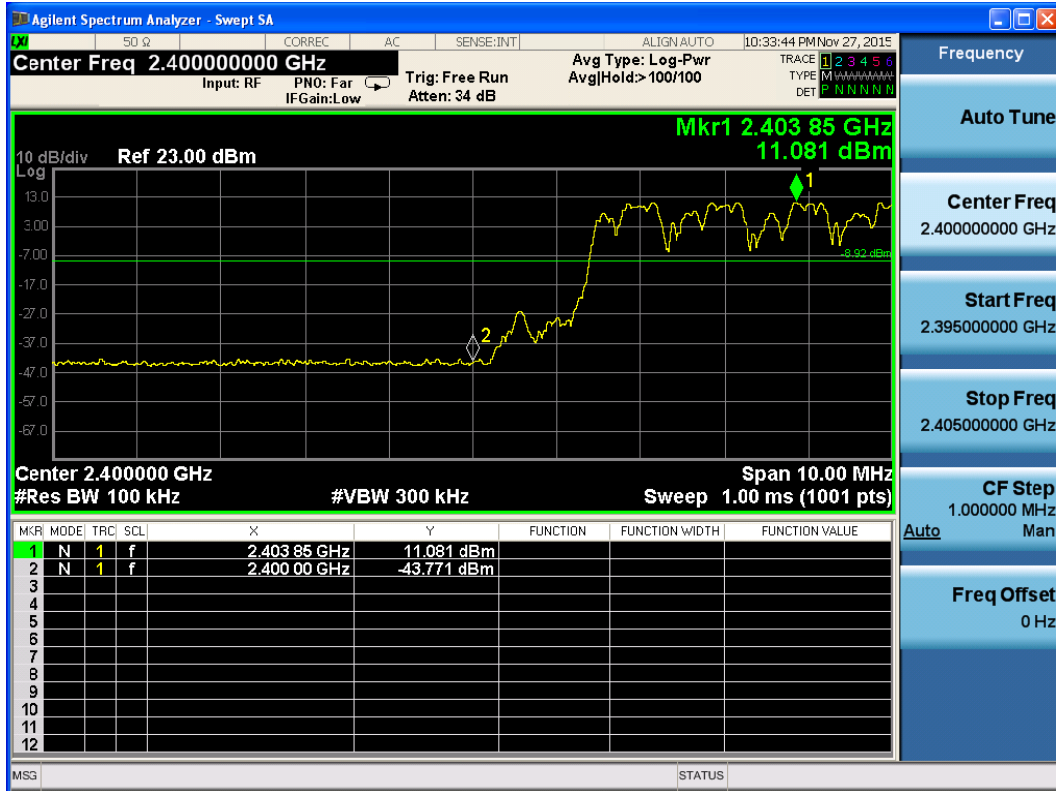

Carrier frequency (MHz): 2402

Channel No.:0




Carrier frequency (MHz): 2480

Channel No.:78




Hopping Off-DH5

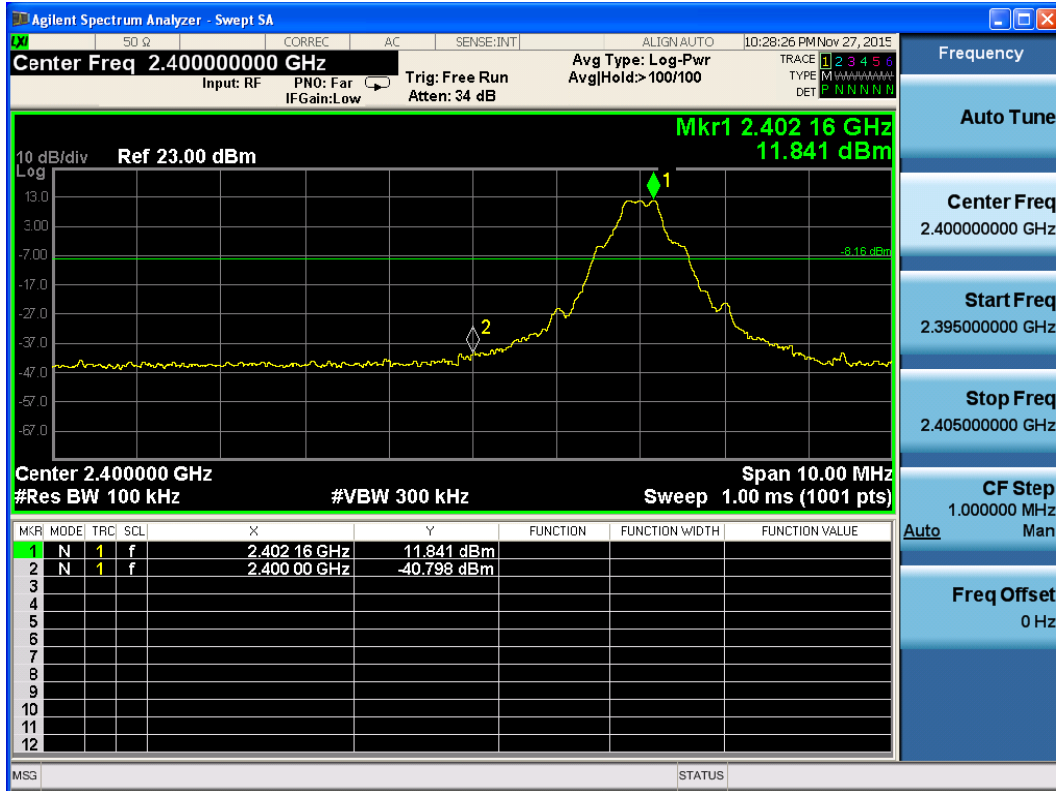

Carrier frequency (MHz): 2402

Channel No.:0

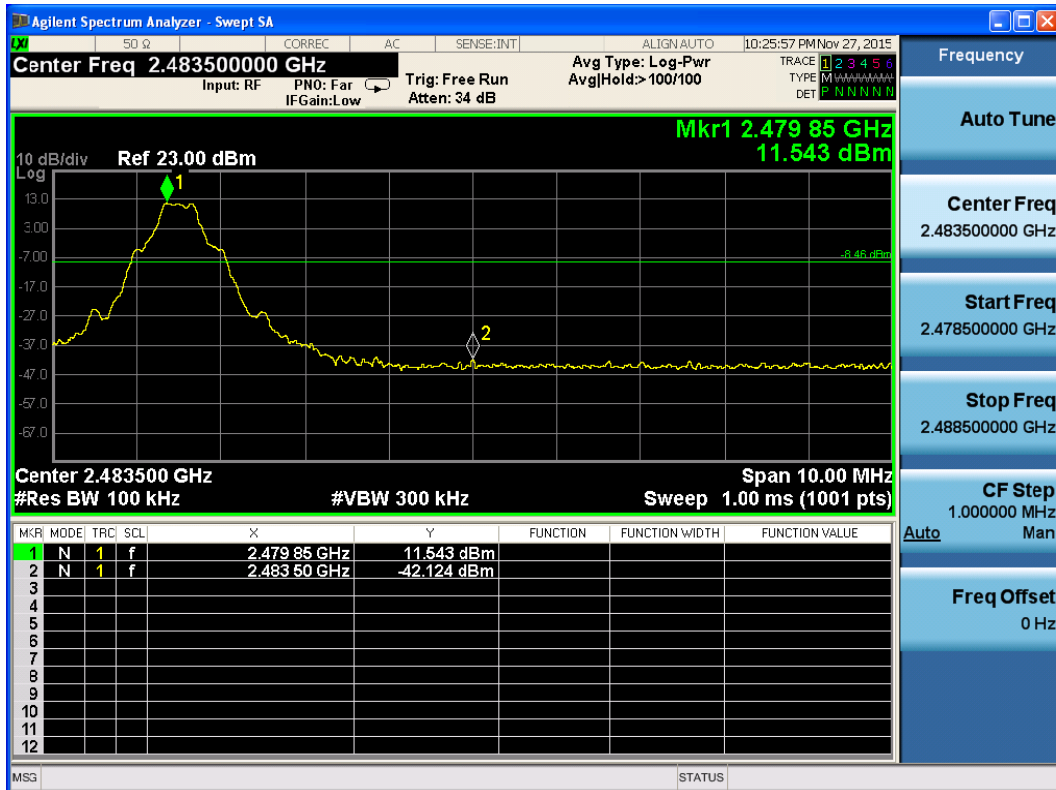


Carrier frequency (MHz): 2480

Channel No.:78




Hopping Off-2DH5

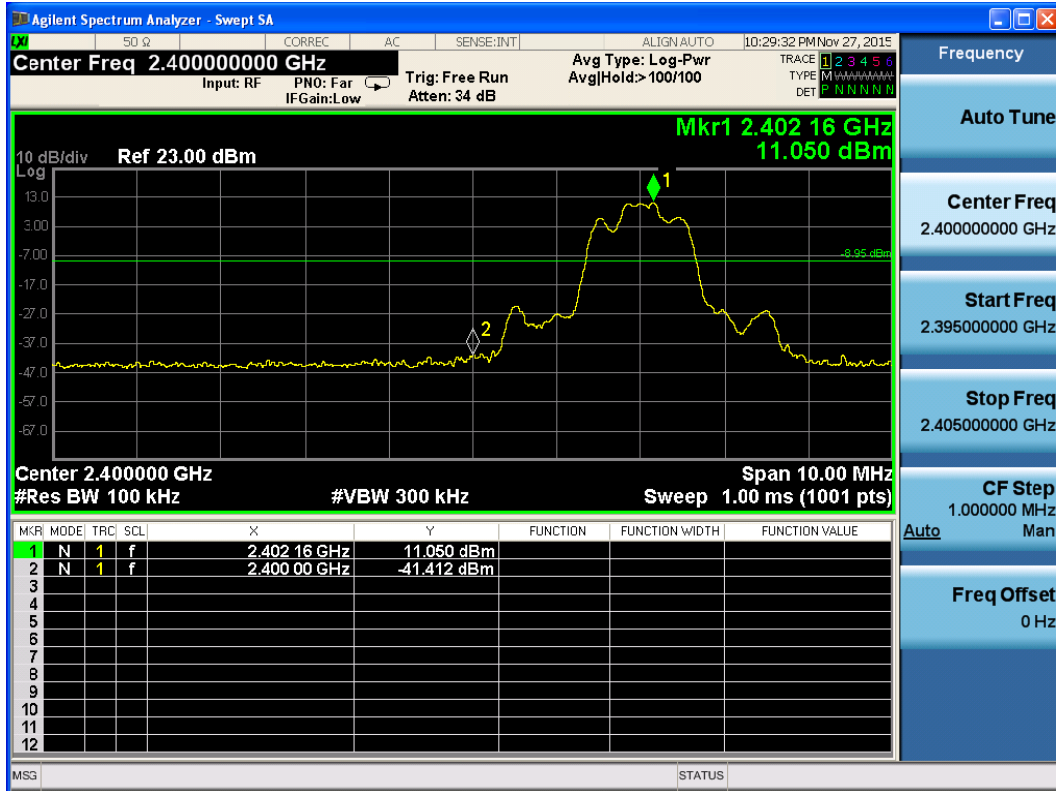

Carrier frequency (MHz): 2402

Channel No.:0

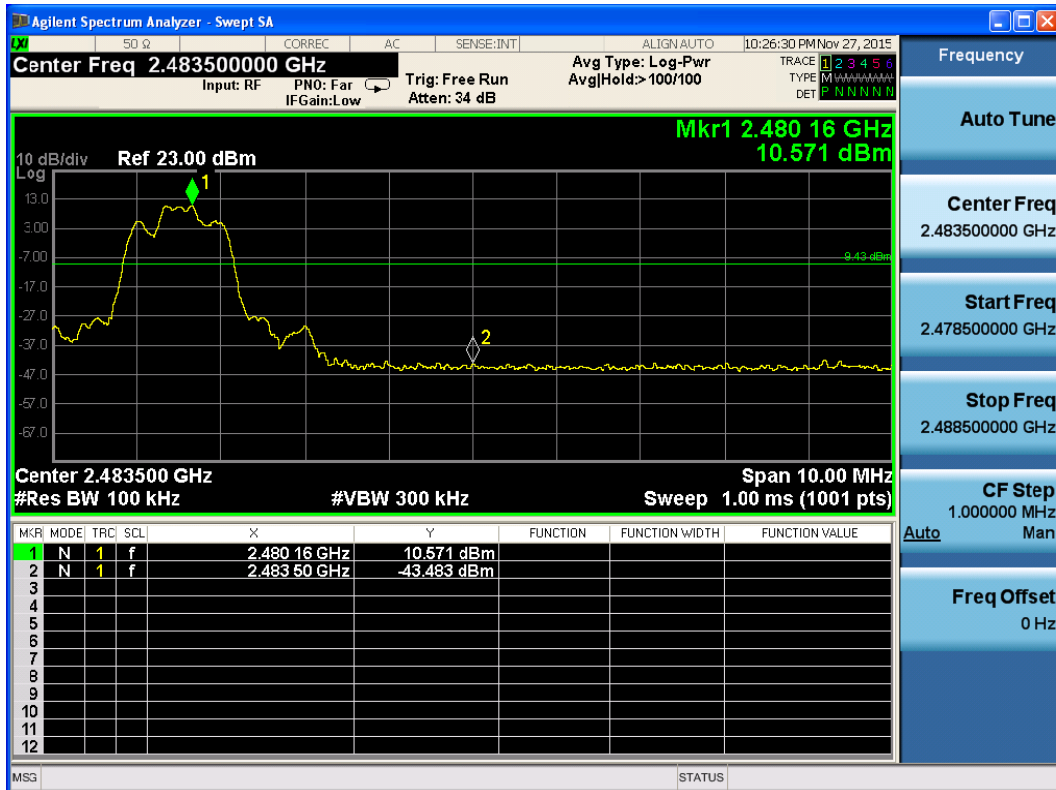


Carrier frequency (MHz): 2480

Channel No.:78




Hopping Off-3DH5

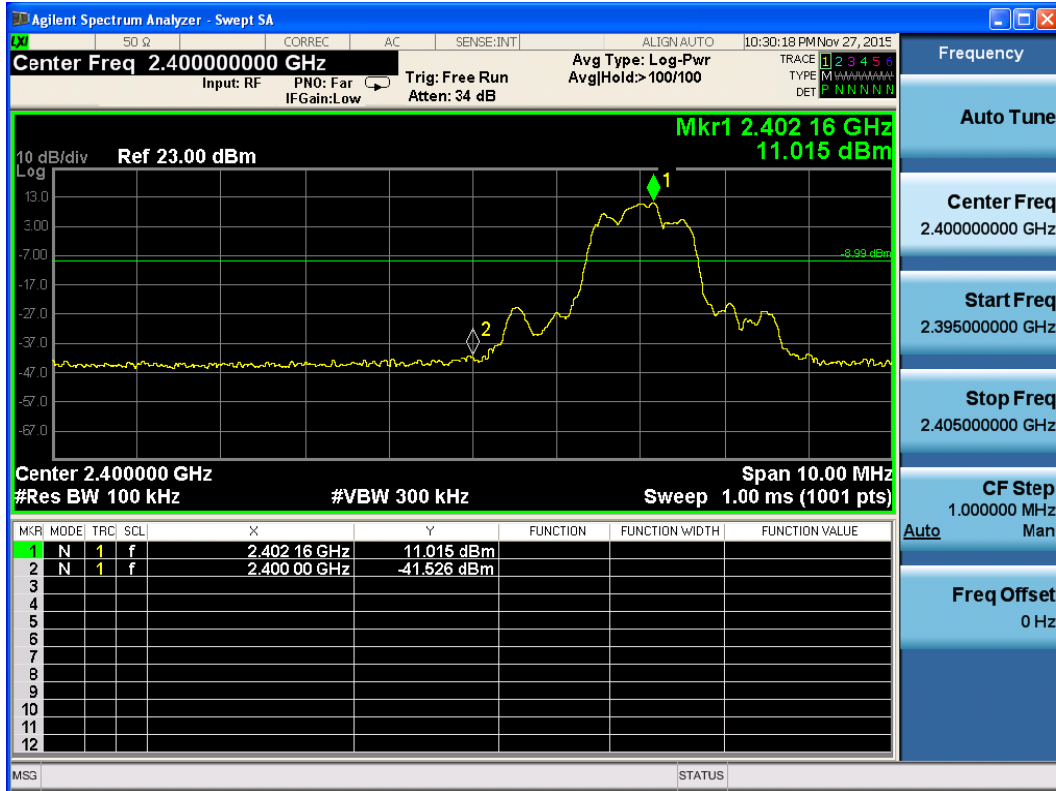

Carrier frequency (MHz): 2402

Channel No.:0

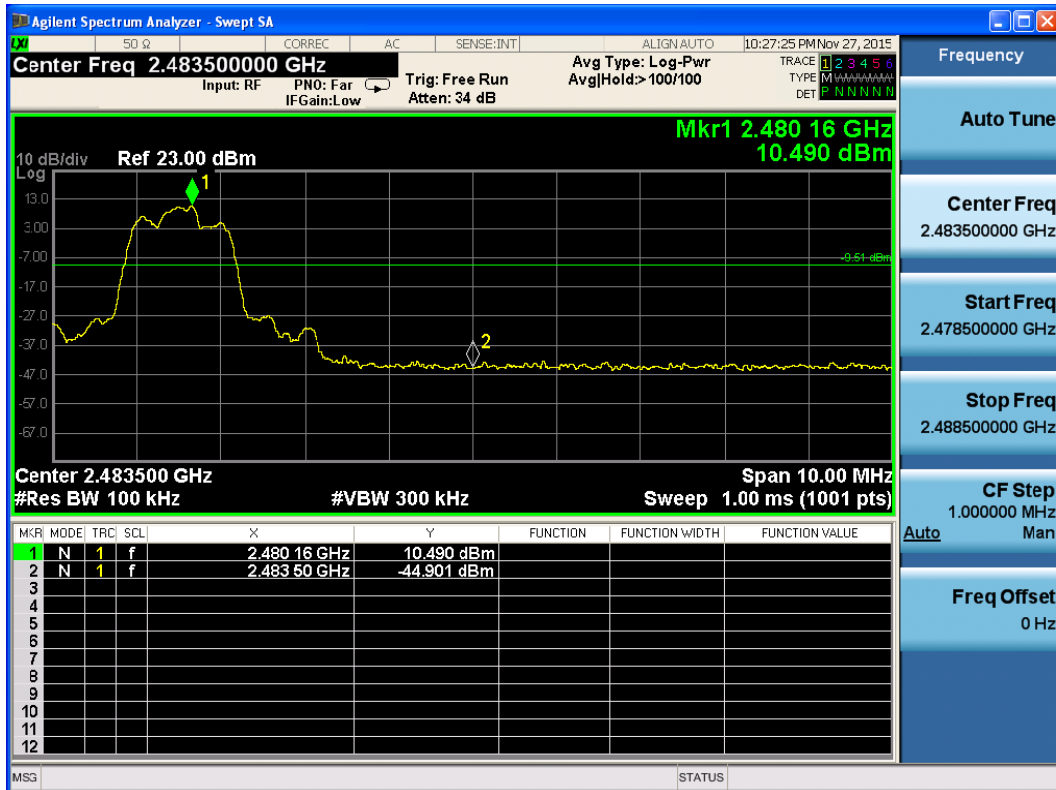

Carrier frequency (MHz): 2480

Channel No.:78

4.7 Spurious Radiated Emissions in the Restricted Band

Ambient condition

| | | |
|-------------|-------------------|----------|
| Temperature | Relative humidity | Pressure |
| 23°C ~25°C | 45%~50% | 101.5kPa |

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.


Set the spectrum analyzer in the following:

- (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
- (b) The dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak- average correction factor, derived from the appropriate duty cycle calculation.

This setting method can refer to **DA00-705**.

The test is in transmitting mode. The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis) and docking mode. The worst emission was found in stand-up position (Y axis) and the worst case was recorded.

Test setup

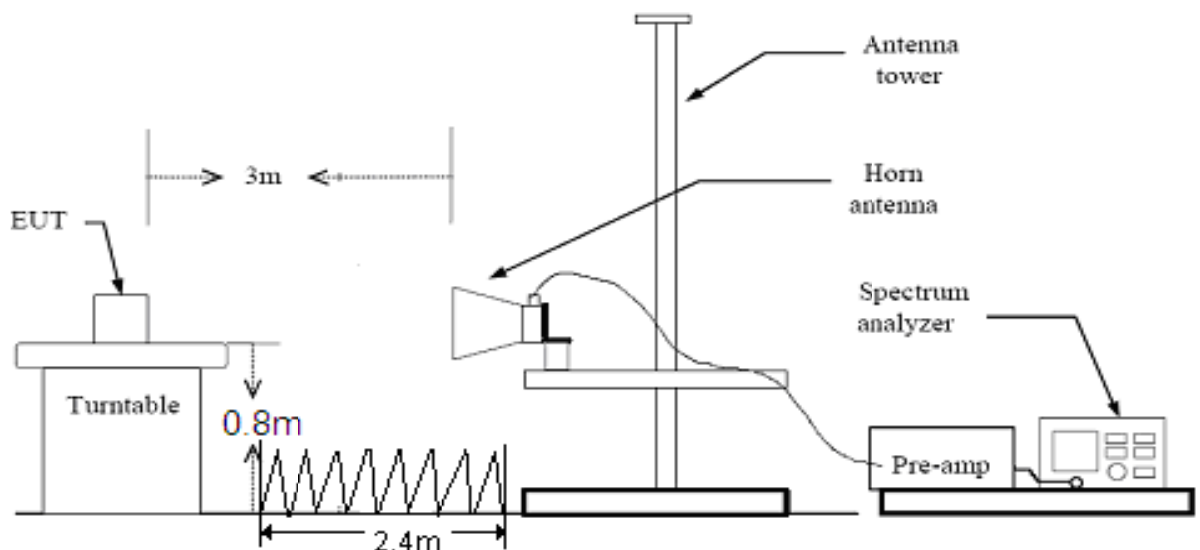

Note: Area side: 2.4mX3.6m

Limits

Spurious Radiated Emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|----------------------------|-----------------------|-----------------|------------------|
| 0.090 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| ¹ 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.6 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 - 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - 156.52525 | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.7 - 156.9 | 2690 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 162.0125 - 167.17 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 167.72 - 173.2 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 240 - 285 | 3345.8 - 3358 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 322 - 335.4 | 3600 - 4400 | (²) |
| 13.36 - 13.41 | | | |

Limit in restricted band

| Frequency of emission (MHz) | Field strength(uV/m) | Field strength(dBuV/m) |
|-----------------------------|----------------------|------------------------|
| 30-88 | 100 | 40 |
| 88-216 | 150 | 43.5 |
| 216-960 | 200 | 46 |
| Above960 | 500 | 54 |

§15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Peak Limit=74dBuV/m

Average Limit=54dBuV/m


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.


Test Results:

Themessy code(dBμV/m) including in the following plots mean dBuV/m.

DH5- Channel 0

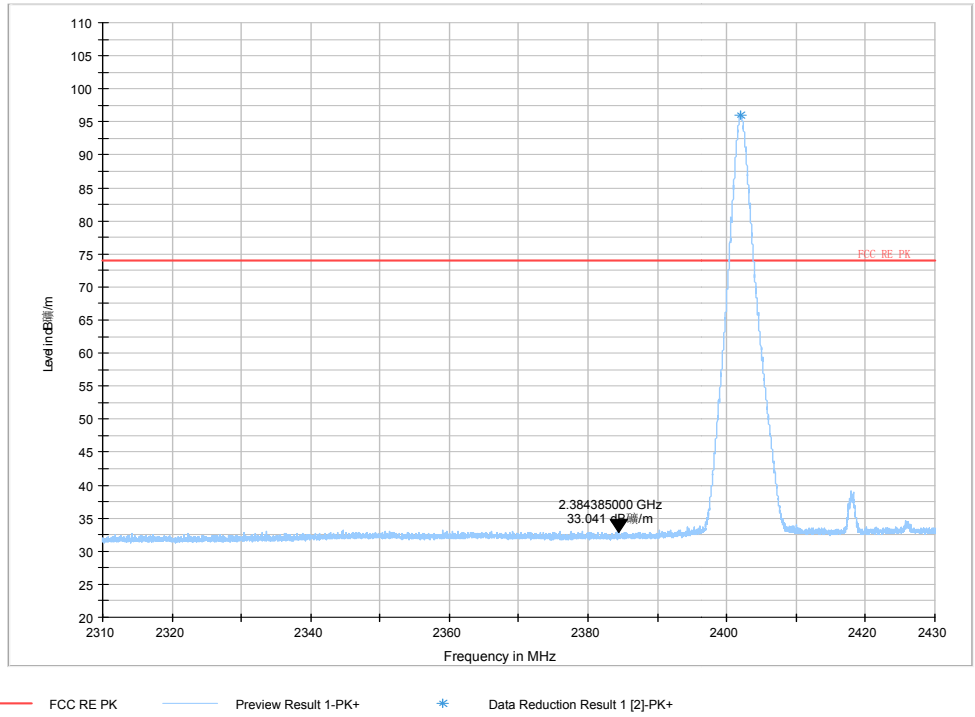


Lower band edge Peak-CH 0

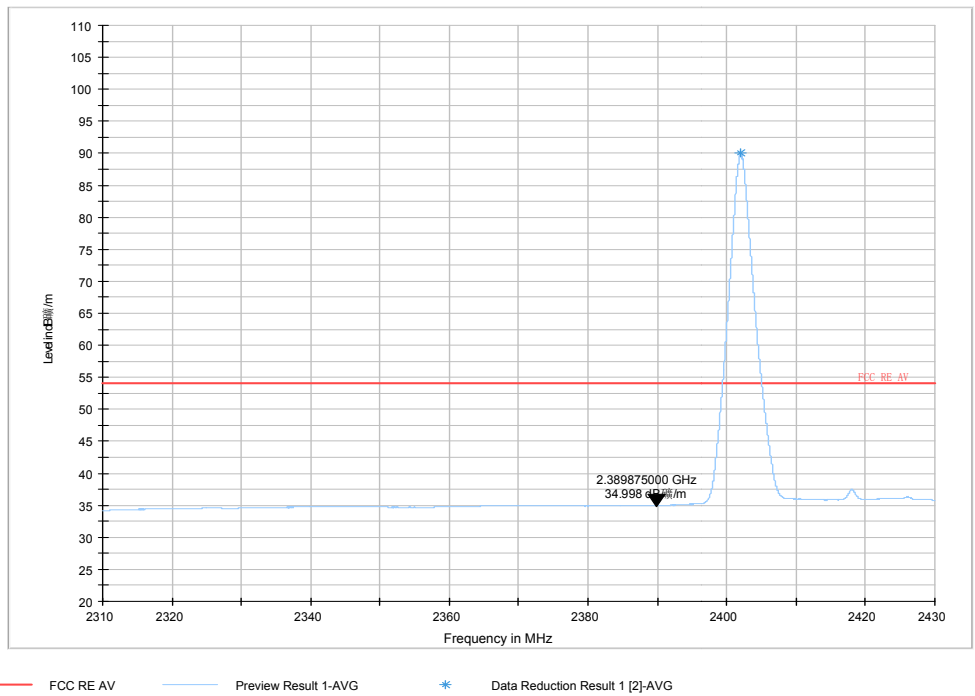

Lower band edge average-CH 0




DH5- Channel 78

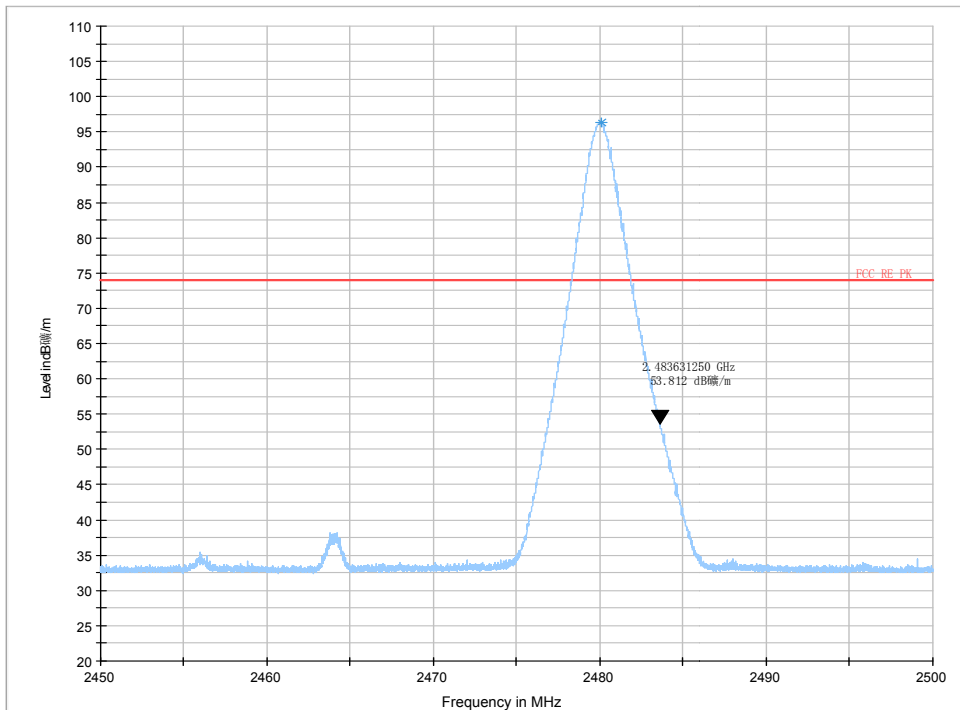

— FCC RE PK — Preview Result 1-PK+ * Data Reduction Result 1 [2]-PK+

Higher band edge Peak-CH 78

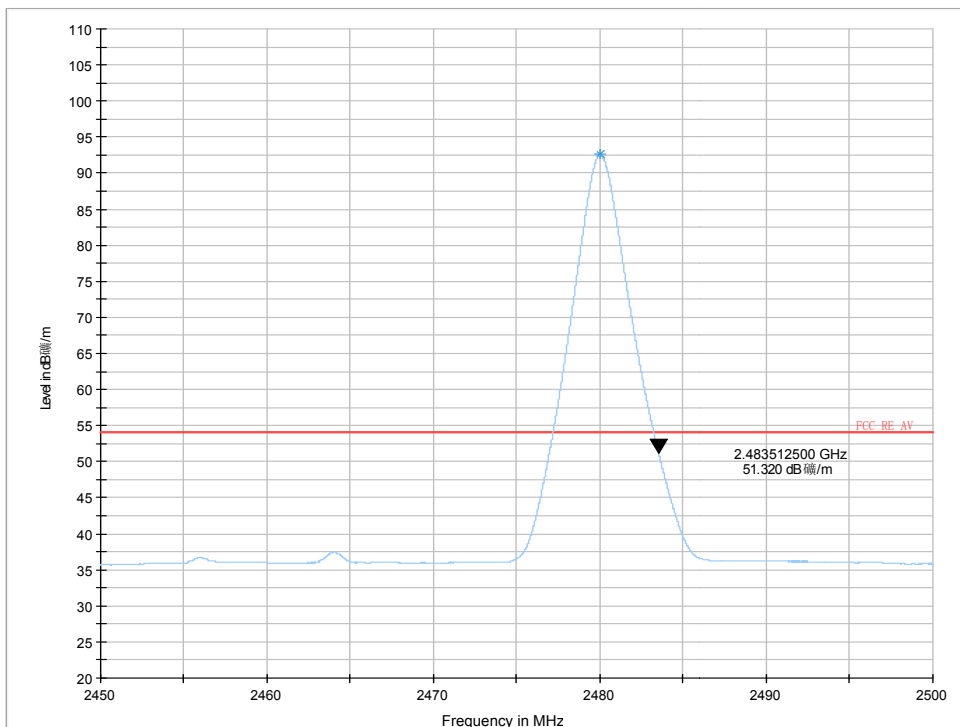


— FCC RE AV — Preview Result 1-AVG * Data Reduction Result 1 [2]-AVG

Higher band edge average-CH 78




3DH5- Channel 0

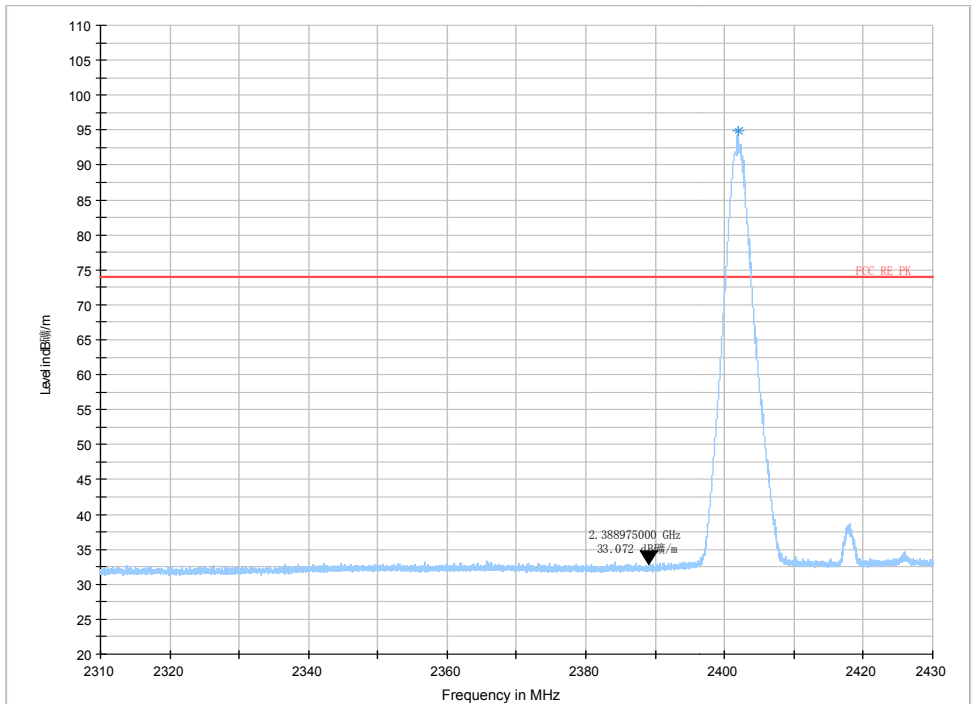

FCC RE PK Preview Result 1-PK+ * Data Reduction Result 1 [2]-PK+

Lower band edge Peak-CH 0

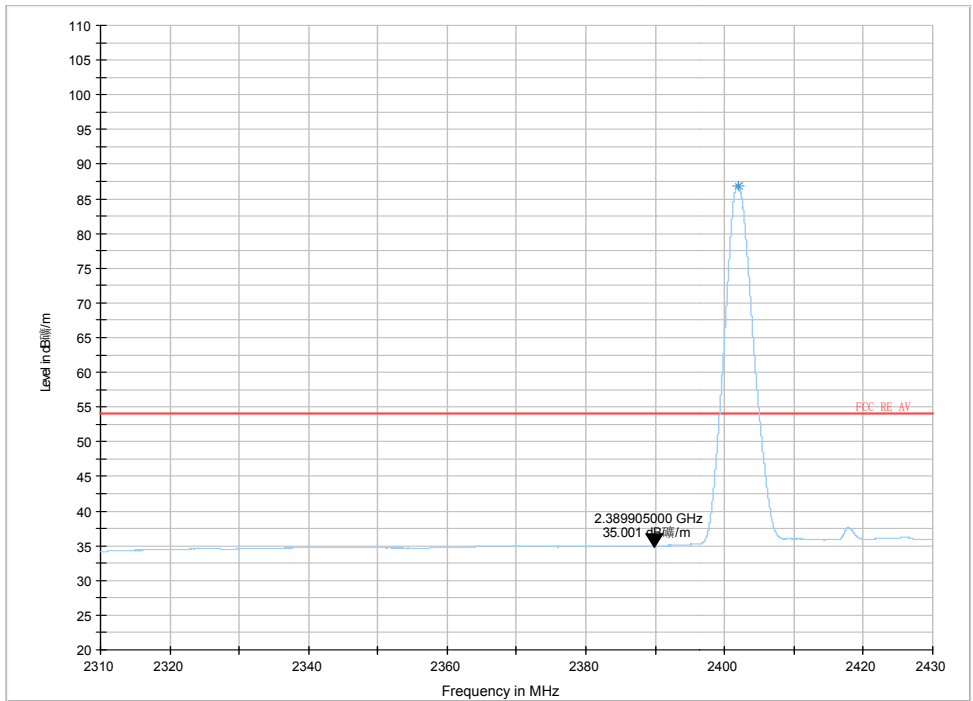


FCC RE AV Preview Result 1-AVG * Data Reduction Result 1 [2]-AVG

Lower band edge average-CH 0




3DH5- Channel 78

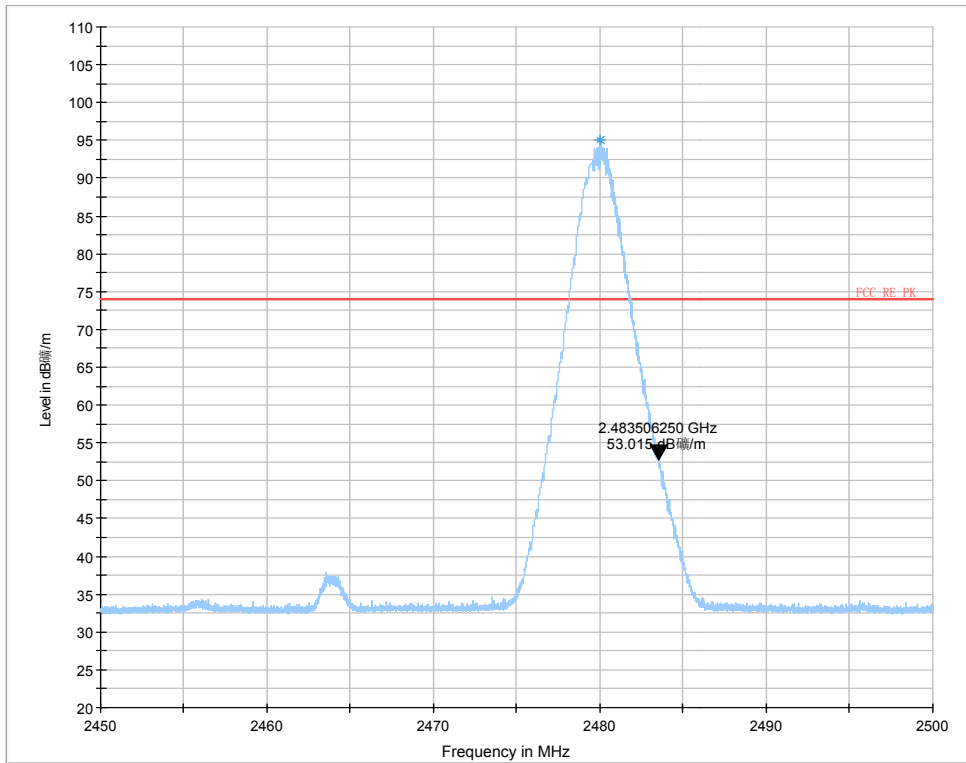

— FCC RE PK — Preview Result 1-PK+ * Data Reduction Result 1 [2]-PK+

Higher band edge Peak-CH 78

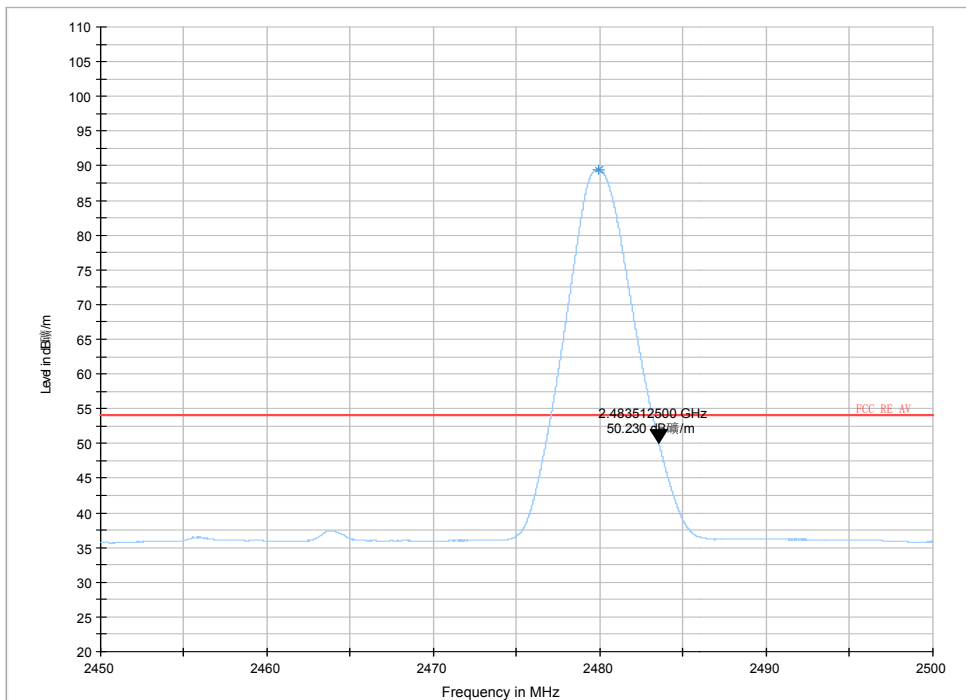

— FCC RE AV — Preview Result 1-AVG * Data Reduction Result 1 [2]-AVG

Higher band edge average-CH 78

4.8 Number of hopping Frequency


Ambient condition

| | | |
|-------------|-------------------|----------|
| Temperature | Relative humidity | Pressure |
| 23°C ~25°C | 45%~50% | 101.5kPa |

Method of Measurement

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss. RBW is set to 1MHz and VBW is set to 3 MHz on spectrum analyzer. Set EUT on Hopping on mode.

Test setup

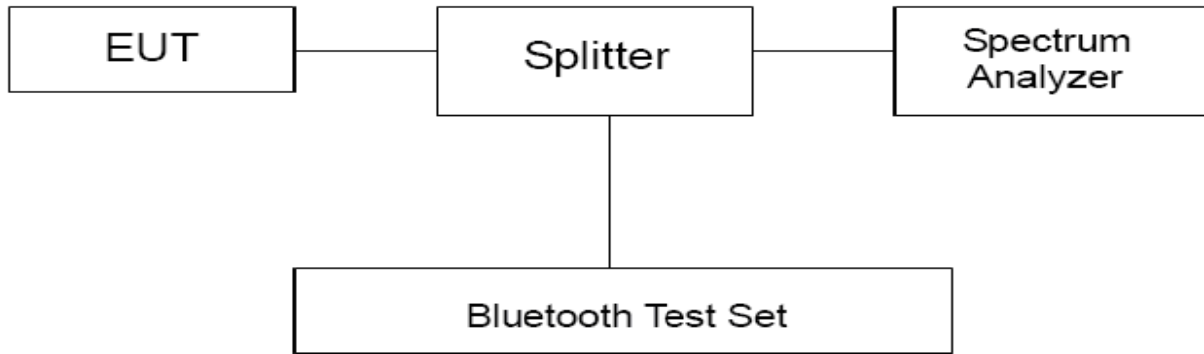

Limits


Rule Part 15.247(a) (1) (iii) specifies that” Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.”

| | |
|--------|---------------|
| Limits | ≥ 15 channels |
|--------|---------------|

Test Results:

DH5

| Number of hopping channels | conclusion |
|----------------------------|------------|
| 79 | PASS |

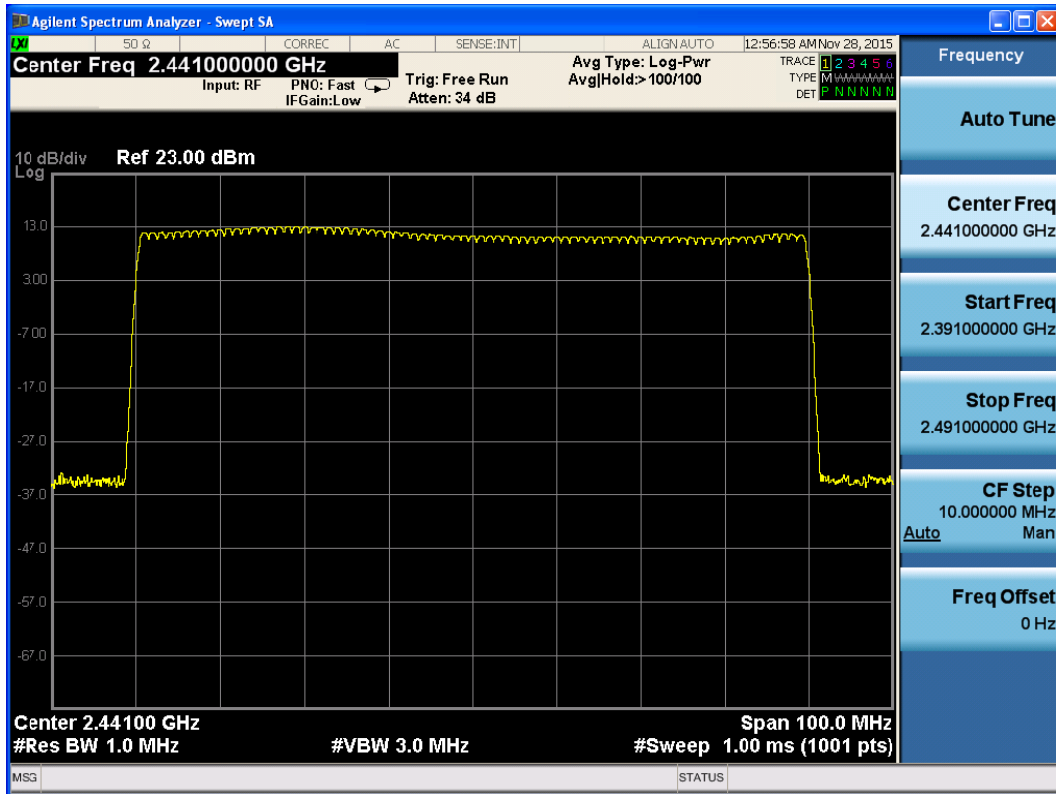


2400 MHz – 2483.5 MHz



2DH5

| Number of hopping channels | conclusion |
|----------------------------|------------|
| 79 | PASS |

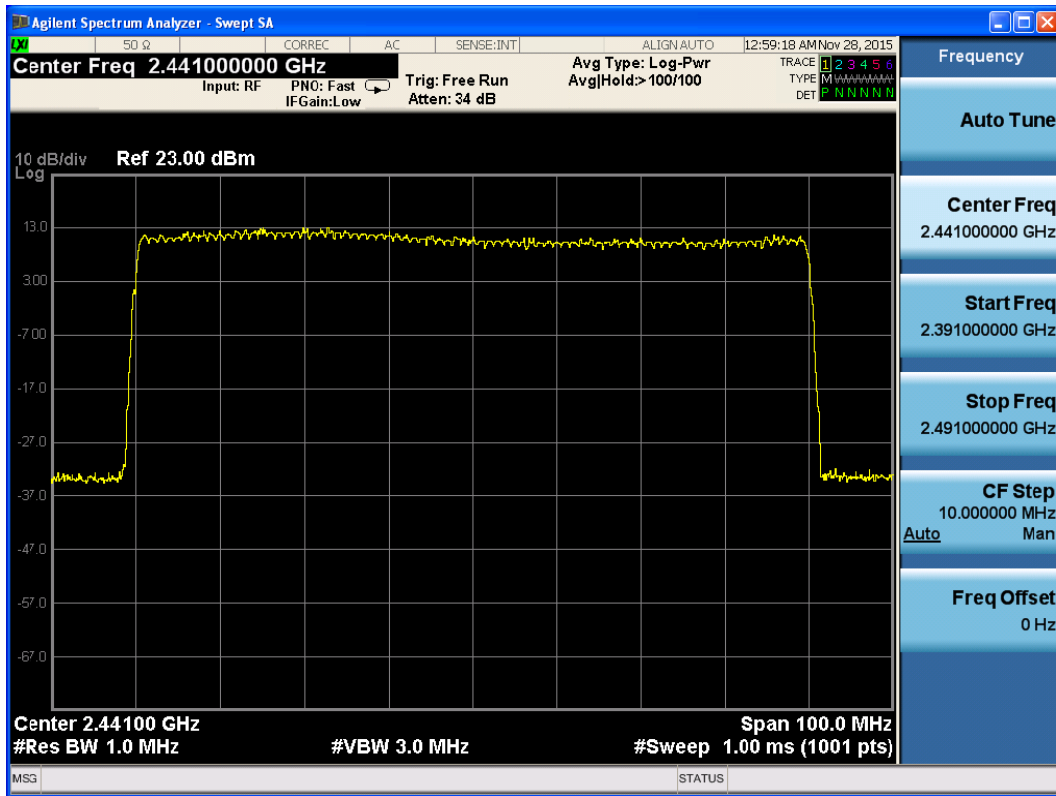


2400 MHz – 2483.5 MHz



3DH5

| Number of hopping channels | conclusion |
|----------------------------|------------|
| 79 | PASS |

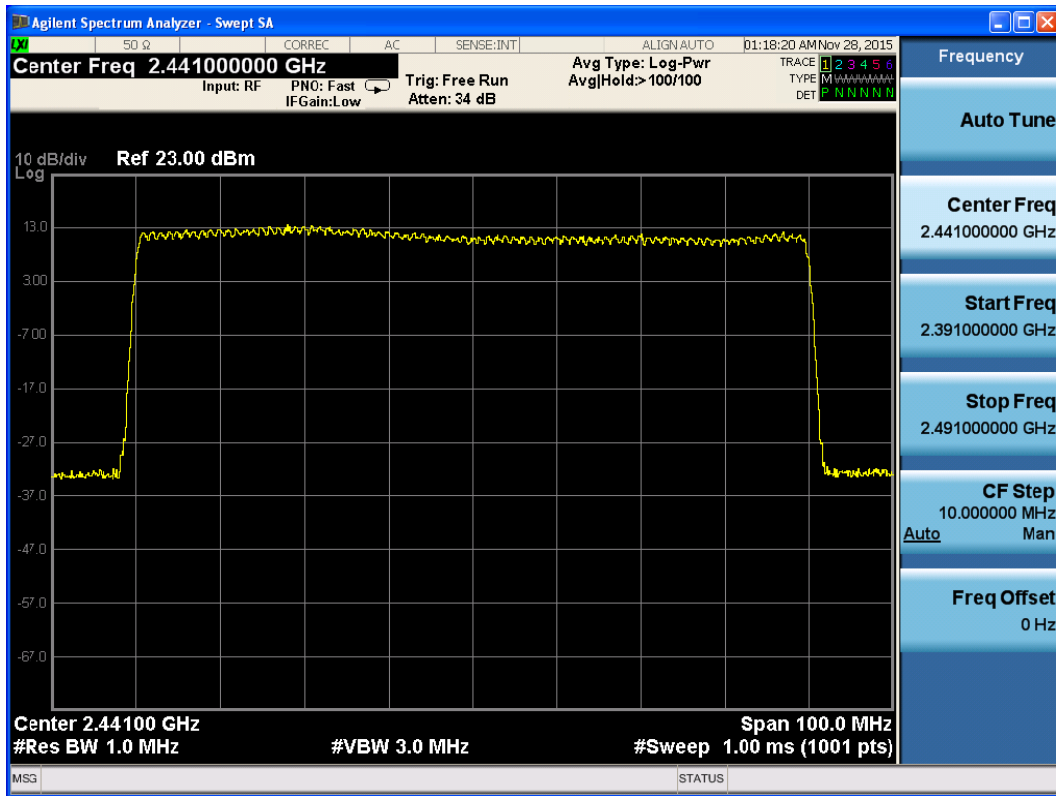

2400 MHz – 2483.5 MHz

4.9 Spurious RF Conducted Emissions


Ambient condition

| | | |
|-------------|-------------------|----------|
| Temperature | Relative humidity | Pressure |
| 23°C ~25°C | 45%~50% | 101.5kPa |

Method of Measurement

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. RBW and VBW are set to 100 kHz, Sweep is set to ATUO. The test is in transmitting mode.

Test setup

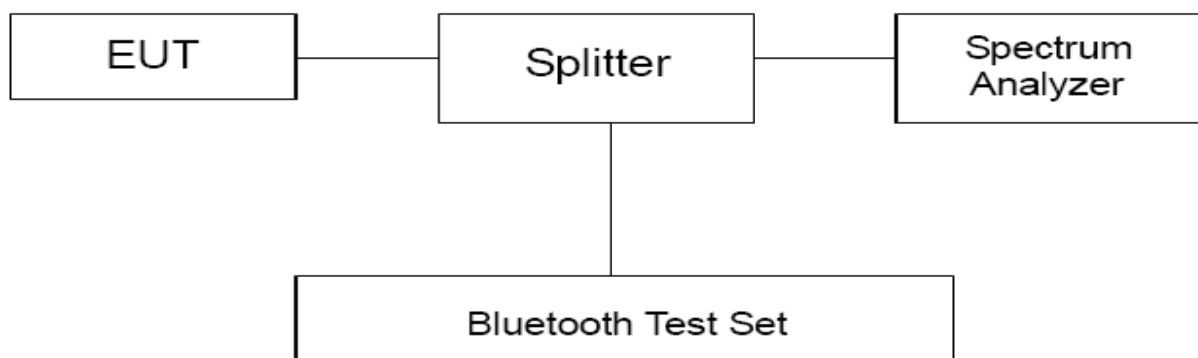

Limits

Rule Part 15.247(d) pacifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.”

| Mode | Carrier frequency (MHz) | Reference value (dBm) | Limit |
|------------|-------------------------|-----------------------|---------|
| DH5 | 2402 | 4.747 | -15.253 |
| | 2441 | 1.776 | -18.224 |
| | 2480 | 1.468 | -18.532 |
| EDR (3DH5) | 2402 | 5.827 | -14.173 |
| | 2441 | 6.825 | -13.175 |
| | 2480 | 1.779 | -18.221 |



Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

| Frequency | Uncertainty |
|-------------|-------------|
| 100kHz-2GHz | 0.684 dB |
| 2GHz-26GHz | 1.407 dB |




Test Results:

GFSK-CH0:

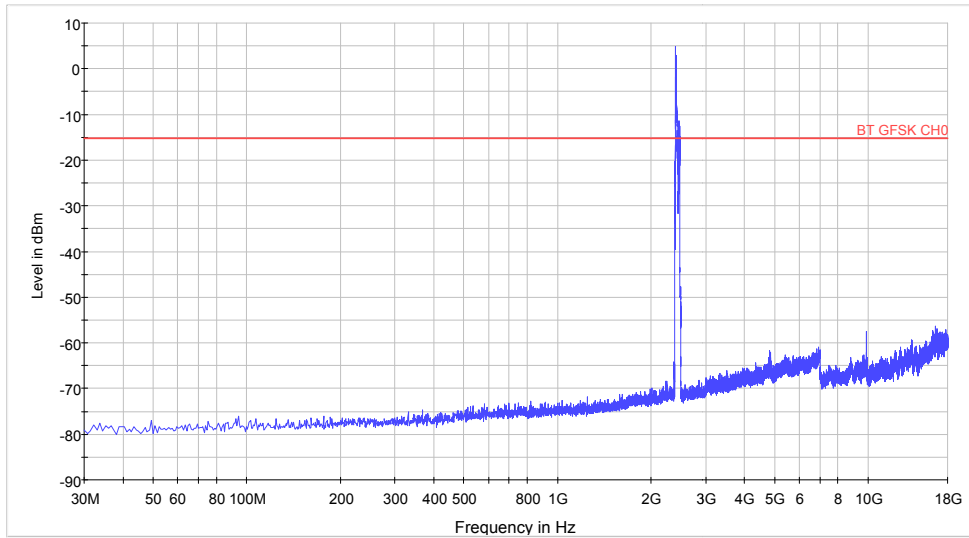

MaxPeak-MaxHold-PK+ BT GFSK CH0


Note: The signal beyond the limit is carrier. Carrier frequency (MHz): 2402
Spurious RF conducted emissions from 30MHz to 18GHz

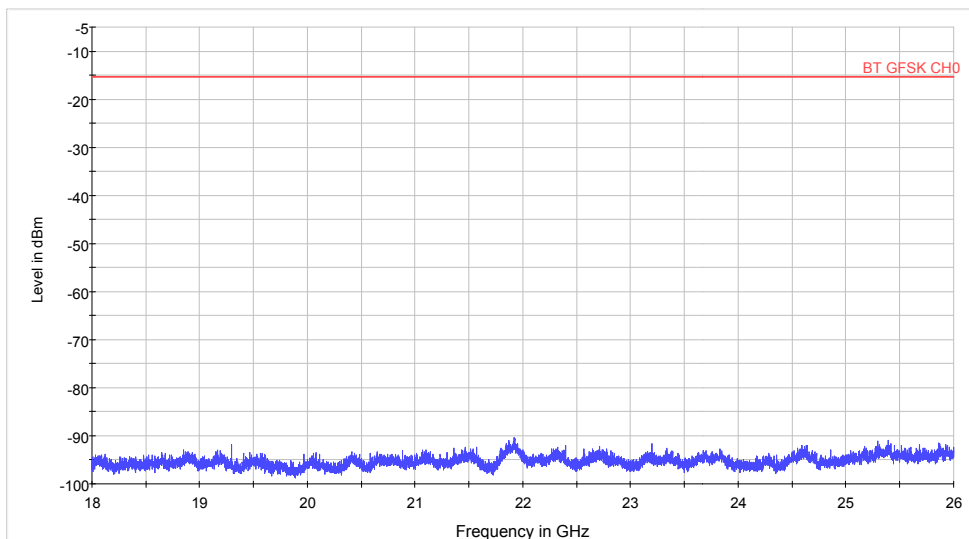

MaxPeak-MaxHold-PK+ BT GFSK CH0


Spurious RF conducted emissions from 18GHz to 26.5GHz

GFSK-CH39:

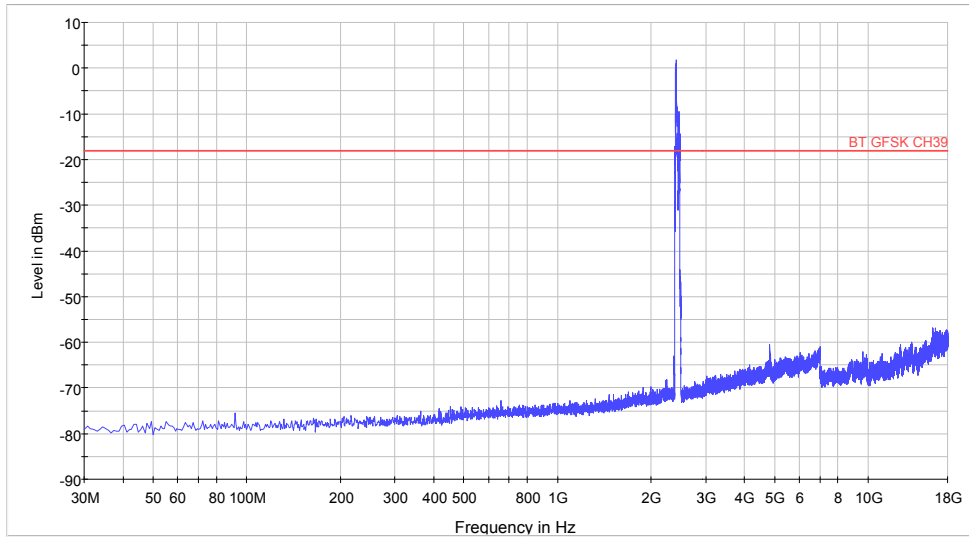

MaxPeak-MaxHold-PK+ BT GFSK CH39


Note: The signal beyond the limit is carrier. Carrier frequency (MHz): 2441
Spurious RF conducted emissions from 30MHz to 18GHz

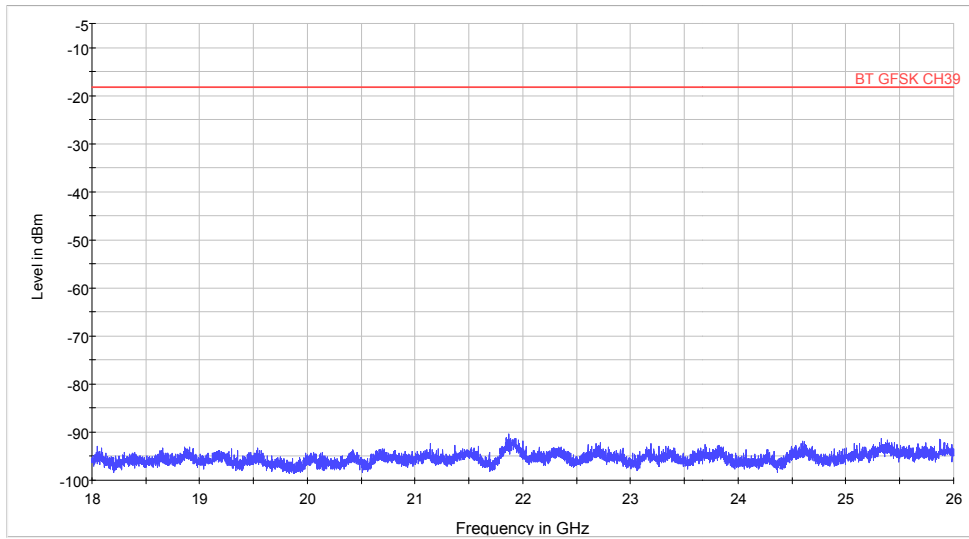

MaxPeak-MaxHold-PK+ BT GFSK CH39


Spurious RF conducted emissions from 18GHz to 26.5GHz

GFSK-CH78:

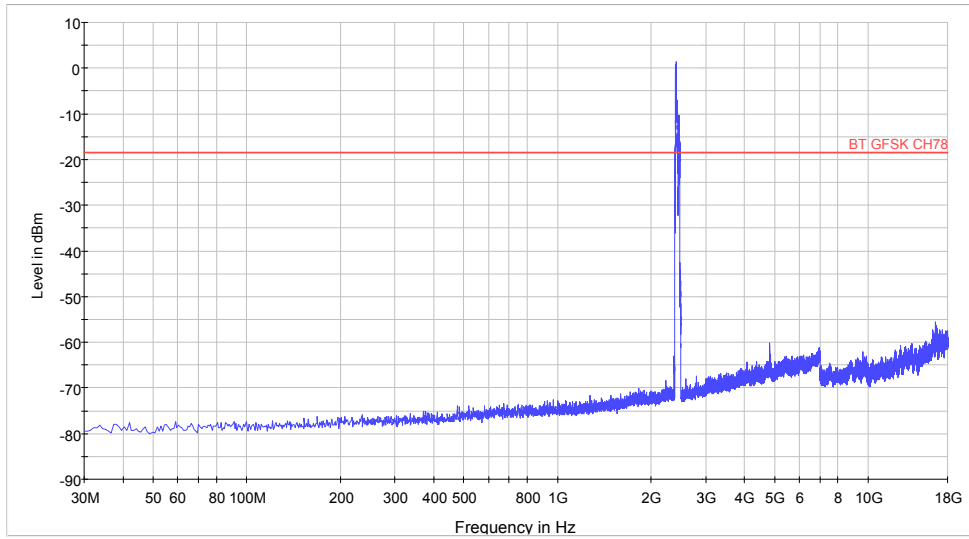

MaxPeak-MaxHold-PK+ BT GFSK CH78

Note: The signal beyond the limit is carrier. Carrier frequency (MHz): 2480
Spurious RF conducted emissions from 30MHz to 18GHz

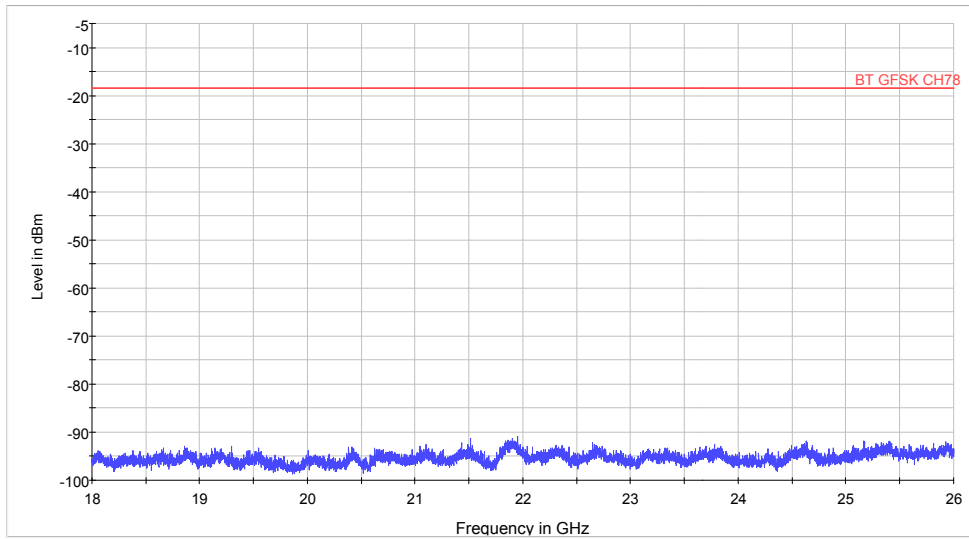


MaxPeak-MaxHold-PK+ BT GFSK CH78

Spurious RF conducted emissions from 18GHz to 26.5GHz




EDR-CH0:

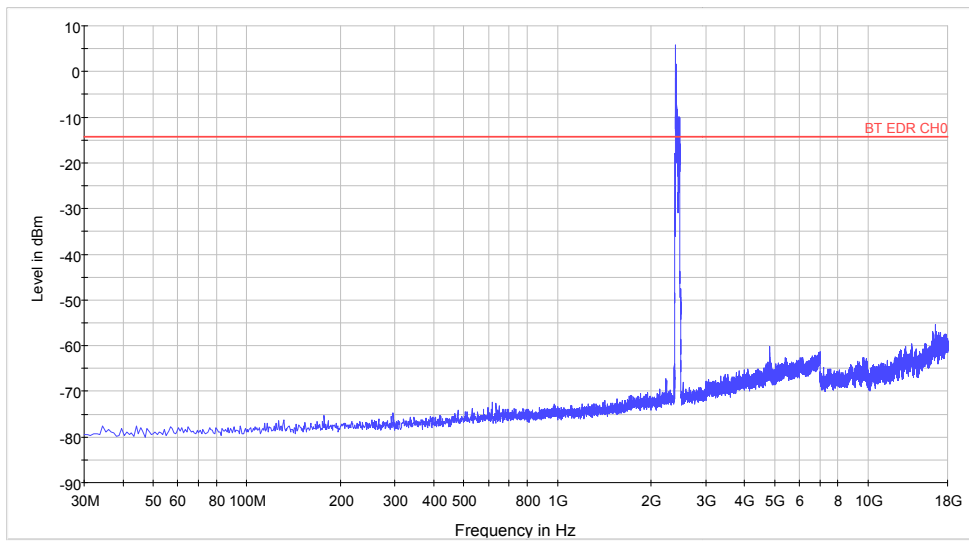

MaxPeak-MaxHold-PK+ BT EDR CH0

Note: The signal beyond the limit is carrier. Carrier frequency (MHz): 2402
Spurious RF conducted emissions from 30MHz to 18GHz

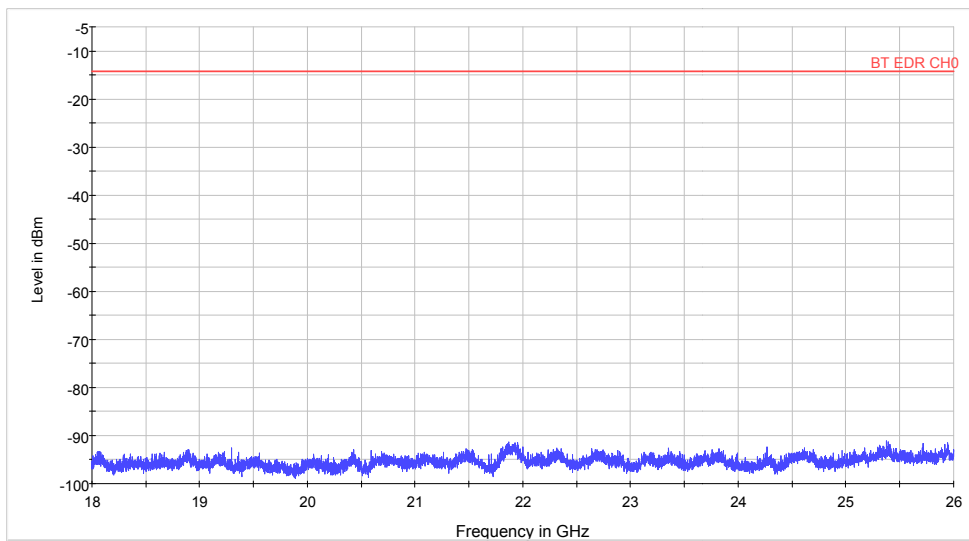


MaxPeak-MaxHold-PK+ BT EDR CH0

Spurious RF conducted emissions from 18GHz to 26.5GHz




EDR -CH39:

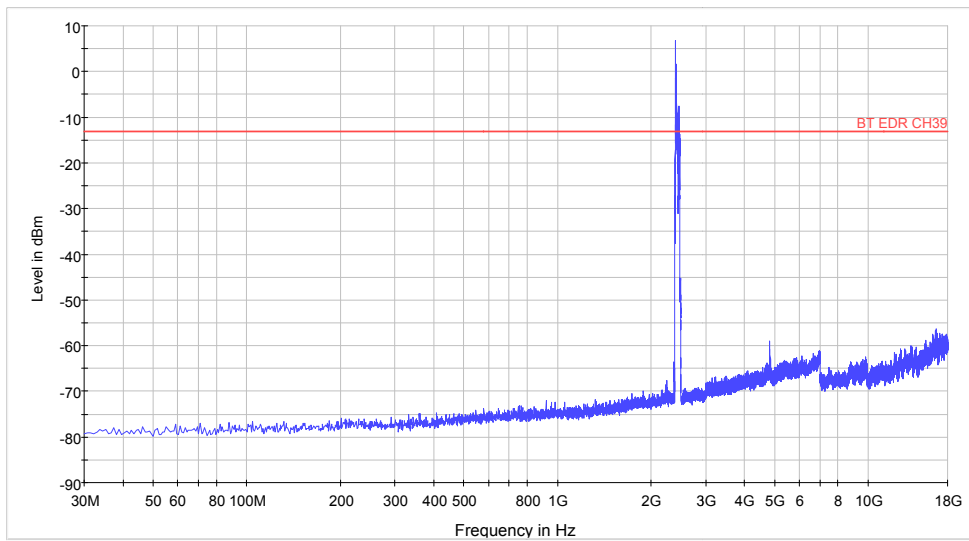

MaxPeak-MaxHold-PK+ BT EDR CH39

Note: The signal beyond the limit is carrier. Carrier frequency (MHz): 2441
Spurious RF conducted emissions from 30MHz to 18GHz

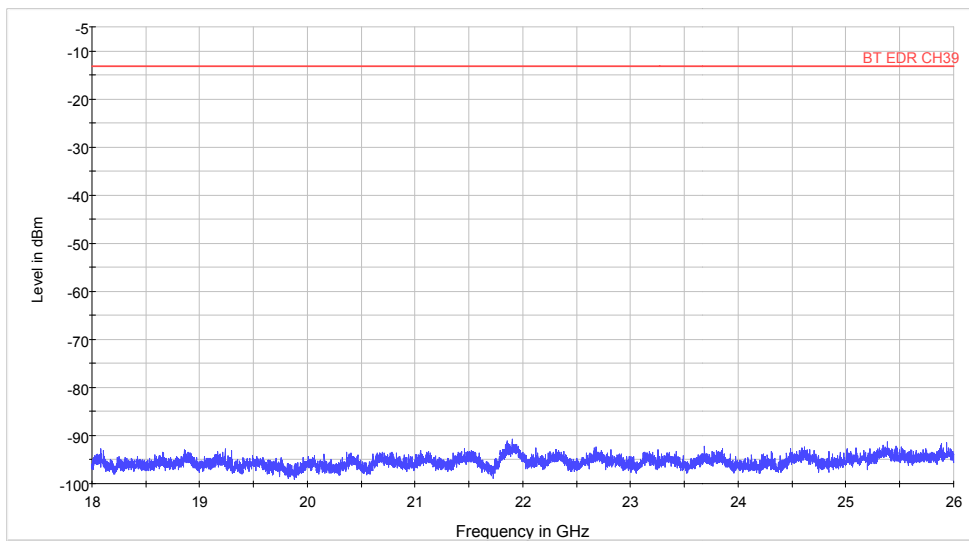


MaxPeak-MaxHold-PK+ BT EDR CH39

Spurious RF conducted emissions from 18GHz to 26.5GHz




EDR -CH78:

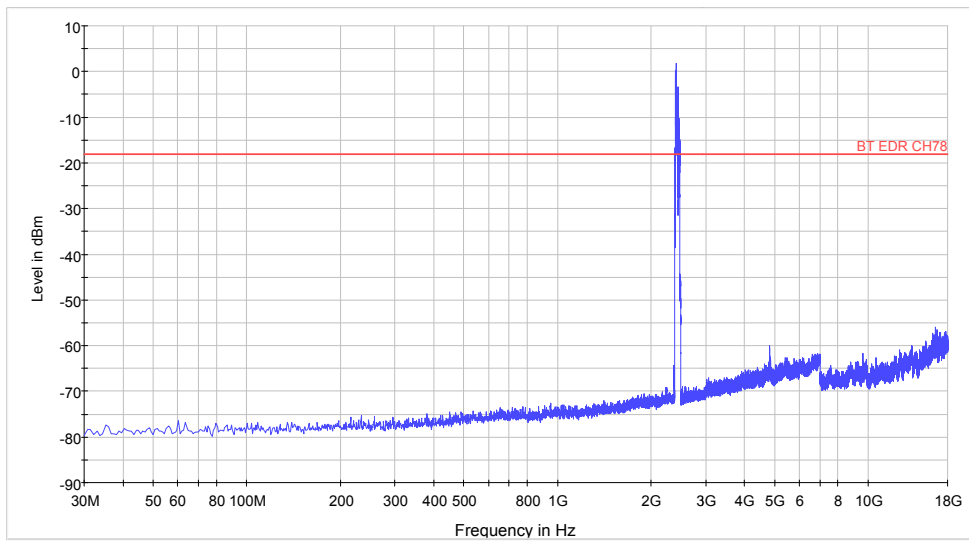

MaxPeak-MaxHold-PK+ BT EDR CH78

Note: The signal beyond the limit is carrier. Carrier frequency (MHz): 2480
Spurious RF conducted emissions from 30MHz to 18GHz

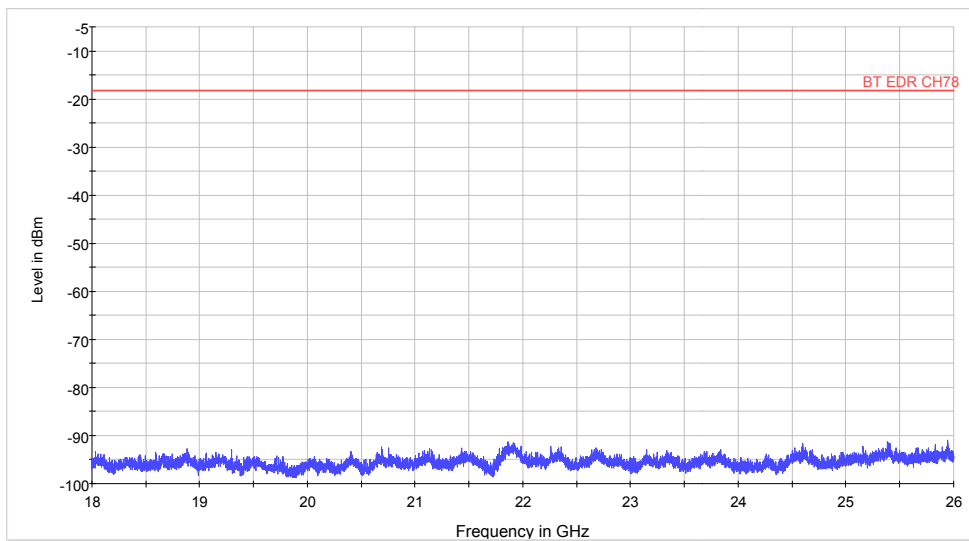

MaxPeak-MaxHold-PK+ BT EDR CH78

Spurious RF conducted emissions from 18GHz to 26.5GHz

4.10 Radiates Emission

Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C | 45%~50% | 102.5kPa |

Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.4-2014. The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band through the range from 9 kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

During the test, below 30MHz, the center of the loop shall be 1 meters; above 30MHz, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Set the spectrum analyzer in the following:

Below 1GHz (detector: Peak and Quasi-Peak)

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz(detector: Peak):

(a) PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO


(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded. Then this mode was measured in the following mode: EUT with cradle and EUT without cradle. The worst emission was found in EUT with cradle mode and the worst case was recorded.


The test is in transmitting mode.

Test setup


9KHz~~~ 30MHz

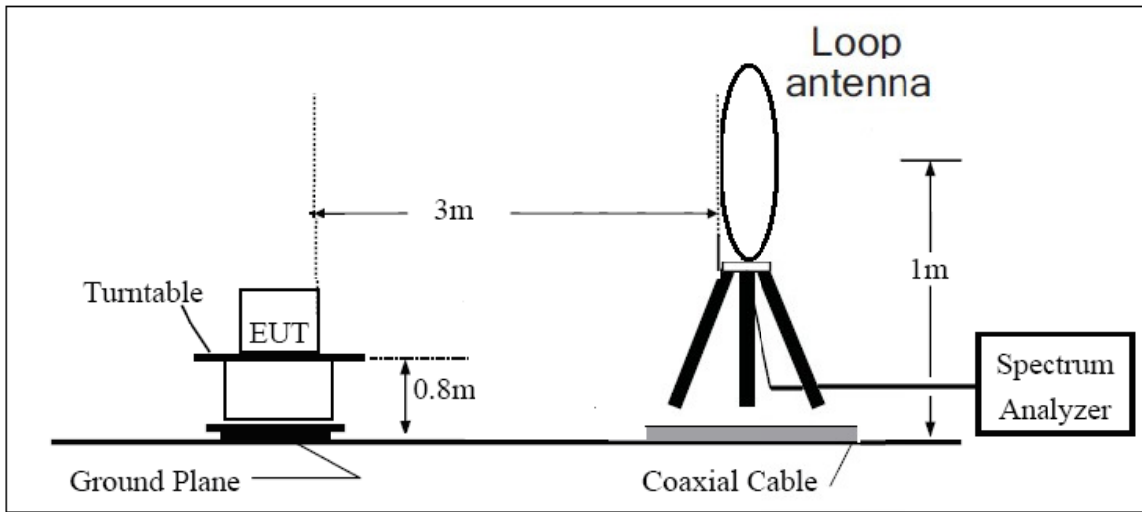

30MHz~~~ 1GHz

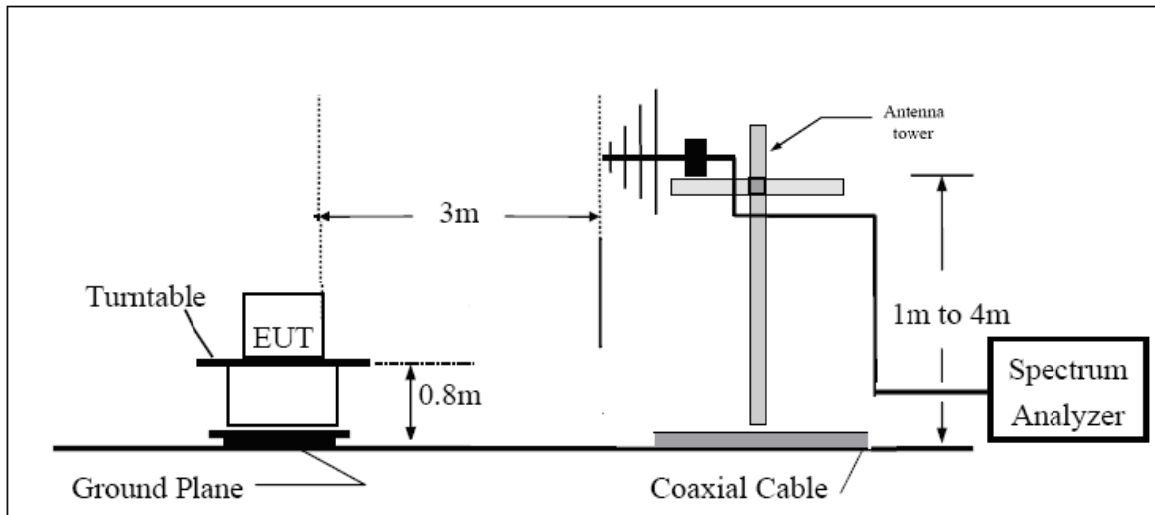

Above 1GHz

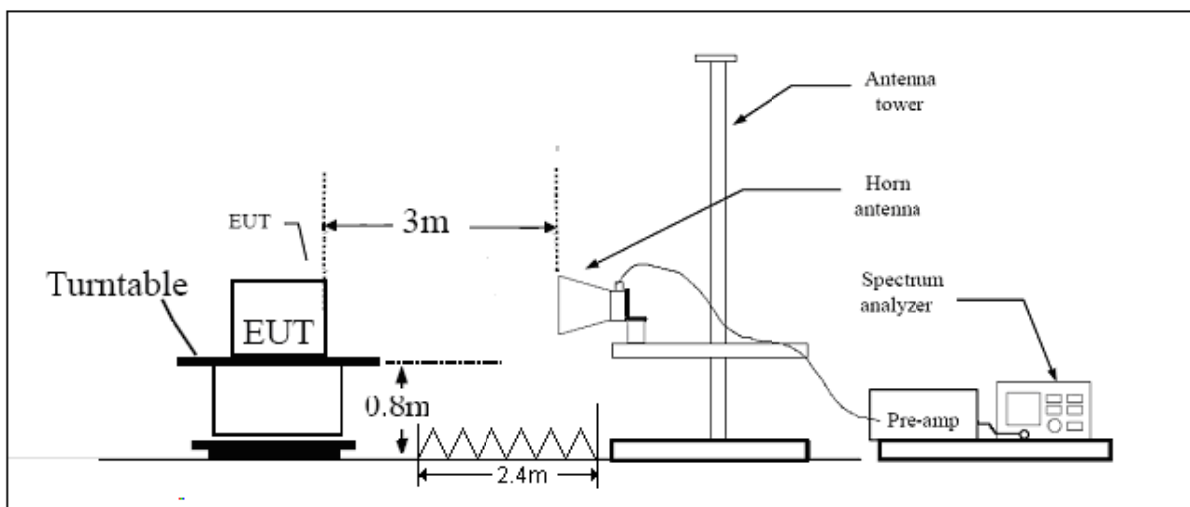

Limits

Rule Part 15.247(d) specifies that “In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).”

Limit in restricted band

| Frequency of emission (MHz) | Field strength(uV/m) | Field strength(dBuV/m) |
|-----------------------------|----------------------|------------------------|
| 0.009–0.490 | 2400/F(kHz) | / |
| 0.490–1.705 | 24000/F(kHz) | / |
| 1.705–30.0 | 30 | / |
| 30-88 | 100 | 40 |
| 88-216 | 150 | 43.5 |
| 216-960 | 200 | 46 |
| Above960 | 500 | 54 |

§15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

| Frequency | Uncertainty |
|--------------|-------------|
| 9KHz-30MHz | 3.55 dB |
| 30MHz-200MHz | 4.19 dB |
| 200MHz-1GHz | 3.63 dB |
| Above 1GHz | 3.68 dB |

Test result

Sweep from 9 kHz to 30MHz, and the emissions more than 20 dB below the permissible value are not reported.


The messy code(dB_{μV/m}) including in the following plots mean dBuV/m.

The following graphs display the maximum values of horizontal and vertical by software.

For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

GFSK-Channel 0

RE 0.03-1GHz QP Class B

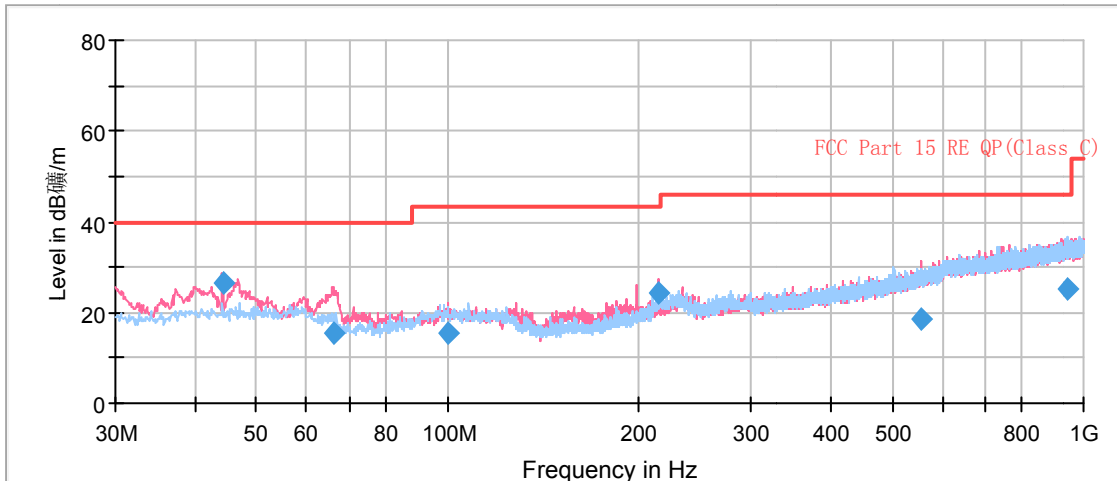


Radiates Emission from 30MHz to 1GHz

Note: This graph displays the maximum values of horizontal and vertical by software

| Frequency (MHz) | Quasi-Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 44.266250 | 26.4 | 100.0 | V | 24.0 | 39.5 | 13.1 | 13.6 | 40.0 |
| 66.011250 | 15.5 | 100.0 | V | 116.0 | 25.6 | 10.1 | 24.5 | 40.0 |
| 100.161250 | 15.4 | 125.0 | V | 28.0 | 28.6 | 13.2 | 28.1 | 43.5 |
| 214.502500 | 24.5 | 100.0 | V | 54.0 | 37.1 | 12.6 | 19.0 | 43.5 |
| 553.997500 | 18.7 | 125.0 | V | 0.0 | 39.9 | 21.2 | 27.3 | 46.0 |
| 946.287500 | 25.2 | 100.0 | H | 99.0 | 51.2 | 26.0 | 20.8 | 46.0 |

RE Bluetooth PK+AV

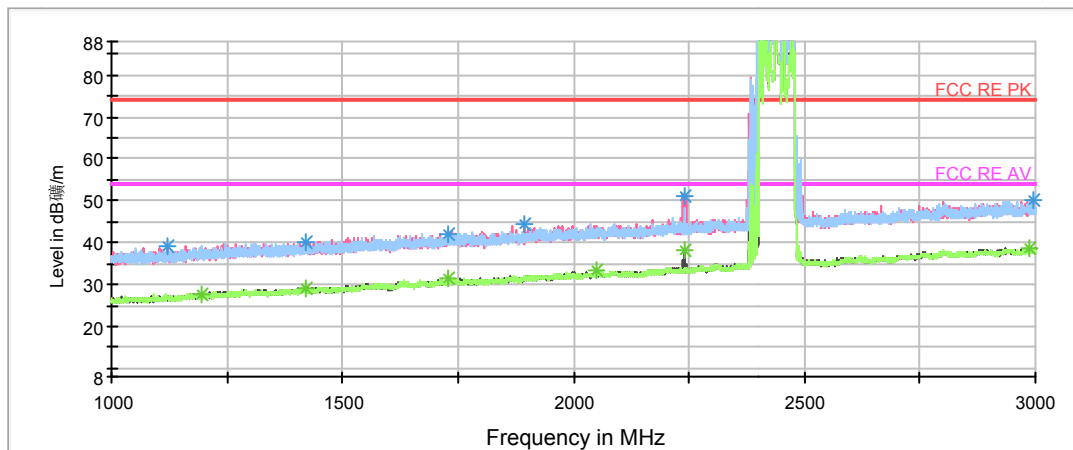

- FCC RE PK
- FCC RE AV
- Preview Result 1V-PK+
- Preview Result 2V-AVG
- Preview Result 1H-PK+
- Preview Result 2H-AVG
- * Data Reduction Result 1 [2]-PK+
- * Data Reduction Result 2 [2]-AVG

Radiates Emission from 1GHz to 3GHz


Note: The signal beyond the limit is carrier.

| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1194.750000 | 37.6 | 100.0 | H | 77.0 | 45.1 | -7.5 | 36.4 | 74 |
| 1422.000000 | 38.2 | 100.0 | V | 272.0 | 44.0 | -5.8 | 35.8 | 74 |
| 1729.750000 | 40.7 | 100.0 | H | 181.0 | 43.8 | -3.1 | 33.3 | 74 |
| 2051.750000 | 42.3 | 100.0 | V | 0.0 | 44.1 | -1.8 | 31.7 | 74 |
| 2240.750000 | 51.2 | 100.0 | V | 9.0 | 52.2 | -1.0 | 22.8 | 74 |
| 2986.750000 | 47.5 | 100.0 | V | 142.0 | 51.3 | 3.8 | 26.5 | 74 |

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1194.750000 | 27.9 | 100.0 | H | 77.0 | 35.4 | -7.5 | 26.1 | 54 |
| 1422.000000 | 29.3 | 100.0 | V | 272.0 | 35.1 | -5.8 | 24.7 | 54 |
| 1729.750000 | 31.5 | 100.0 | H | 181.0 | 34.6 | -3.1 | 22.5 | 54 |
| 2051.750000 | 33.2 | 100.0 | V | 0.0 | 35.0 | -1.8 | 20.8 | 54 |
| 2240.750000 | 38.4 | 100.0 | V | 9.0 | 39.4 | -1.0 | 15.6 | 54 |
| 2986.750000 | 38.7 | 100.0 | V | 142.0 | 42.5 | 3.8 | 15.3 | 54 |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 3-18GHz PK+AV

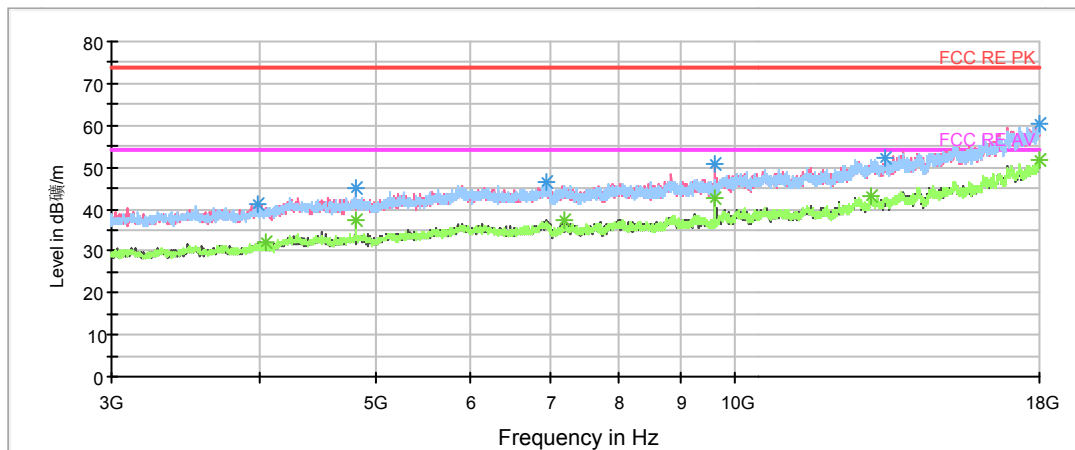

- FCC RE PK
- FCC RE AV
- Preview Result 1V-PK+
- Preview Result 2V-AVG
- Preview Result 1H-PK+
- Preview Result 2H-AVG
- * Data Reduction Result 1 [1]-PK+
- * Data Reduction Result 2 [1]-AVG


Radiates Emission from 3GHz to 18GHz

| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 4040.625000 | 39.5 | 100.0 | H | 0.0 | 40.1 | 0.6 | 34.5 | 74 |
| 4803.750000 | 44.1 | 100.0 | H | 3.0 | 46.8 | 2.7 | 29.9 | 74 |
| 7205.625000 | 43.9 | 100.0 | V | 340.0 | 52.6 | 8.7 | 30.1 | 74 |
| 9607.500000 | 51.0 | 100.0 | V | 11.0 | 61.0 | 10.0 | 23.0 | 74 |
| 13014.375000 | 51.1 | 100.0 | H | 25.0 | 67.3 | 16.2 | 22.9 | 74 |
| 17981.250000 | 59.5 | 100.0 | H | 117.0 | 84.7 | 25.2 | 14.5 | 74 |

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 4040.625000 | 32.1 | 100.0 | H | 0.0 | 32.7 | 0.6 | 21.9 | 54 |
| 4803.750000 | 37.4 | 100.0 | H | 3.0 | 40.1 | 2.7 | 16.6 | 54 |
| 7205.625000 | 37.4 | 100.0 | V | 340.0 | 46.1 | 8.7 | 16.6 | 54 |
| 9607.500000 | 42.8 | 100.0 | V | 11.0 | 52.8 | 10.0 | 11.2 | 54 |
| 13014.375000 | 43.0 | 100.0 | H | 25.0 | 59.2 | 16.2 | 11.0 | 54 |
| 17981.250000 | 51.6 | 100.0 | H | 117.0 | 76.8 | 25.2 | 2.4 | 54 |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 18-26.5GHz PK+AV

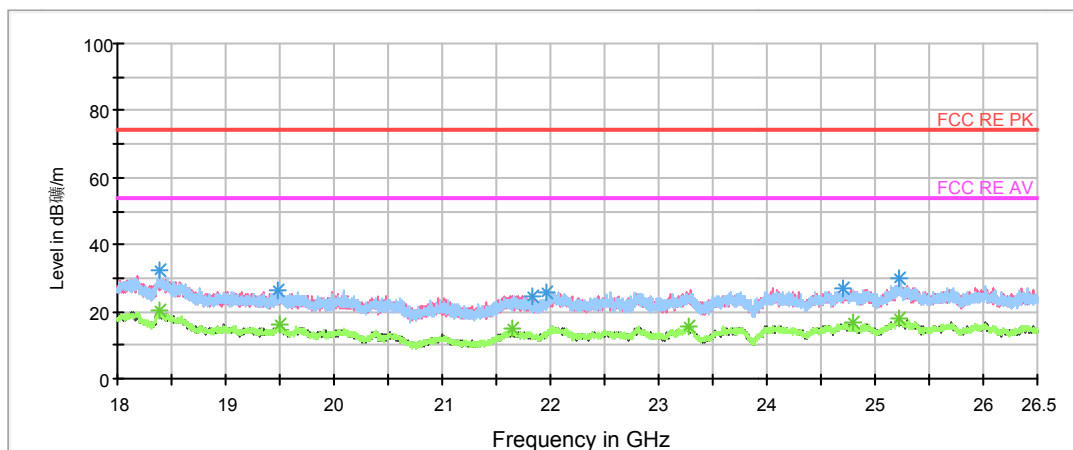

- FCC RE PK
- FCC RE AV
- Preview Result 1V-PK+
- Preview Result 2V-AVG
- Preview Result 1H-PK+
- Preview Result 2H-AVG
- * Data Reduction Result 1 [1]-PK+
- * Data Reduction Result 2 [1]-AVG


Radiates Emission from 18GHz to 26.5GHz

| Frequency (MHz) | Peak (dBuV/m) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 18381.437500 | 30.0 | H | 0.0 | 34.8 | -4.8 | 44.0 | 74 |
| 19492.812500 | 25.1 | V | 0.0 | 32.7 | -7.6 | 48.9 | 74 |
| 21644.375000 | 22.5 | H | 0.0 | 31.6 | -9.1 | 51.5 | 74 |
| 23277.437500 | 24.0 | H | 0.0 | 31.2 | -7.2 | 50.0 | 74 |
| 24800.000000 | 25.5 | H | 0.0 | 32.1 | -6.6 | 48.5 | 74 |
| 25223.937500 | 27.9 | V | 0.0 | 33.8 | -5.9 | 46.1 | 74 |

| Frequency (MHz) | Average (dBuV/m) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 18381.437500 | 20.2 | H | 0.0 | 25.0 | -4.8 | 33.8 | 54 |
| 19492.812500 | 15.9 | V | 0.0 | 23.5 | -7.6 | 38.1 | 54 |
| 21644.375000 | 14.7 | H | 0.0 | 23.8 | -9.1 | 39.3 | 54 |
| 23277.437500 | 15.6 | H | 0.0 | 22.8 | -7.2 | 38.4 | 54 |
| 24800.000000 | 16.6 | H | 0.0 | 23.2 | -6.6 | 37.4 | 54 |
| 25223.937500 | 18.2 | V | 0.0 | 24.1 | -5.9 | 35.8 | 54 |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


RE 0.03-1GHz QP Class B

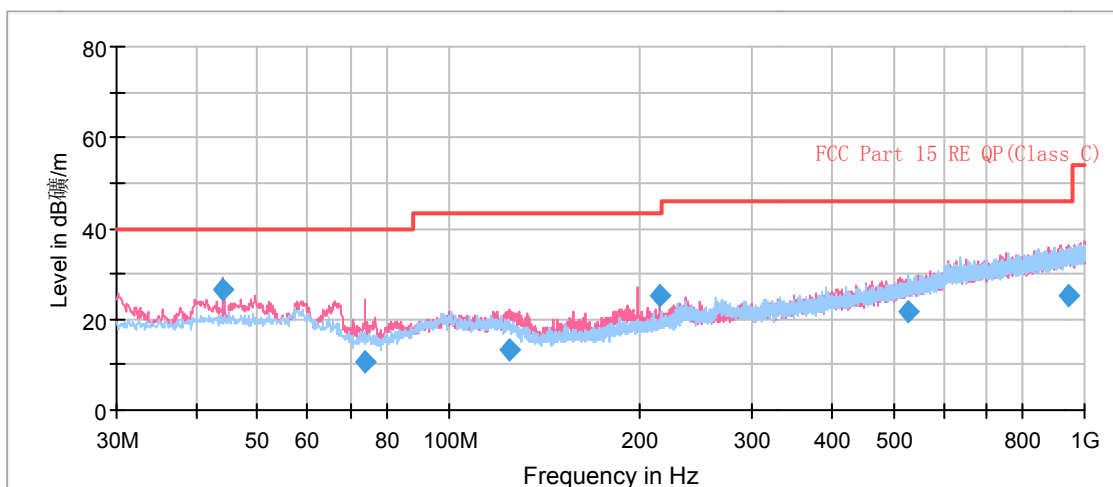

Radiates Emission from 30MHz to 1GHz

| Frequency (MHz) | Quasi-Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 44.226250 | 26.5 | 100.0 | V | 271.0 | 39.6 | 13.1 | 13.5 | 40.0 |
| 73.972500 | 10.4 | 114.0 | V | 0.0 | 19.0 | 8.6 | 29.6 | 40.0 |
| 124.812500 | 13.4 | 125.0 | V | 340.0 | 23.4 | 10.0 | 30.1 | 43.5 |
| 214.502500 | 25.1 | 100.0 | V | 14.0 | 37.7 | 12.6 | 18.4 | 43.5 |
| 528.013750 | 21.8 | 100.0 | H | 324.0 | 42.3 | 20.5 | 24.2 | 46.0 |
| 943.375000 | 25.3 | 125.0 | V | 2.0 | 51.3 | 26.0 | 20.7 | 46.0 |

RE Bluetooth PK+AV

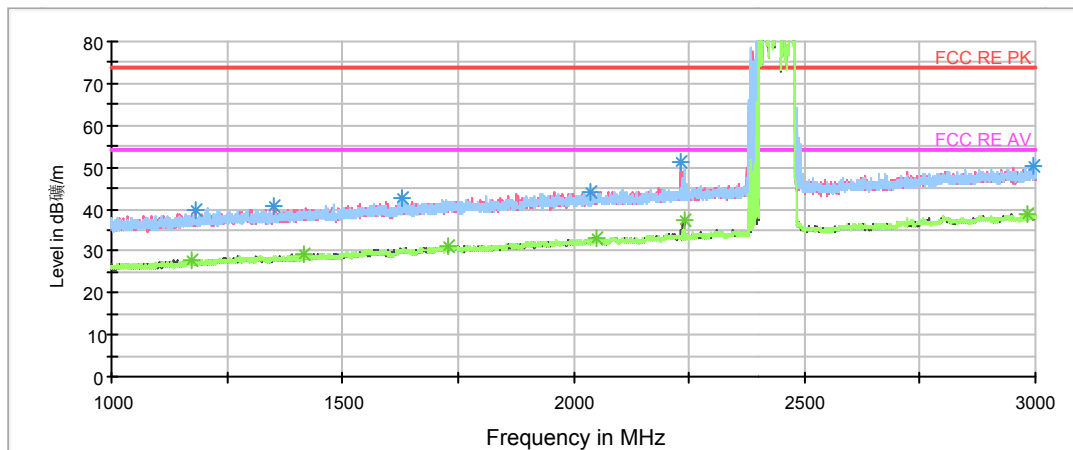

- FCC RE PK
- FCC RE AV
- Preview Result 1V-PK+
- Preview Result 2V-AVG
- Preview Result 1H-PK+
- Preview Result 2H-AVG
- * Data Reduction Result 1 [2]-PK+
- * Data Reduction Result 2 [2]-AVG

Radiates Emission from 1GHz to 3GHz


Note: The signal beyond the limit is carrier.

| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1171.750000 | 37.3 | 100.0 | H | 53.0 | 44.3 | -7.0 | 36.7 | 74 |
| 1418.000000 | 38.7 | 100.0 | V | 234.0 | 44.6 | -5.9 | 35.3 | 74 |
| 1729.750000 | 40.8 | 100.0 | H | 6.0 | 43.9 | -3.1 | 33.2 | 74 |
| 2051.250000 | 42.6 | 100.0 | V | 198.0 | 44.5 | -1.9 | 31.4 | 74 |
| 2240.750000 | 49.4 | 100.0 | V | 0.0 | 50.4 | -1.0 | 24.6 | 74 |
| 2983.500000 | 47.6 | 100.0 | V | 0.0 | 51.4 | 3.8 | 26.4 | 74 |

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1171.750000 | 28.0 | 100.0 | H | 53.0 | 35.0 | -7.0 | 26.0 | 54 |
| 1418.000000 | 29.3 | 100.0 | V | 234.0 | 35.2 | -5.9 | 24.7 | 54 |
| 1729.750000 | 31.3 | 100.0 | H | 6.0 | 34.4 | -3.1 | 22.7 | 54 |
| 2051.250000 | 33.3 | 100.0 | V | 198.0 | 35.2 | -1.9 | 20.7 | 54 |
| 2240.750000 | 37.3 | 100.0 | V | 0.0 | 38.3 | -1.0 | 16.7 | 54 |
| 2983.500000 | 38.9 | 100.0 | V | 0.0 | 42.7 | 3.8 | 15.1 | 54 |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 3-18GHz PK+AV

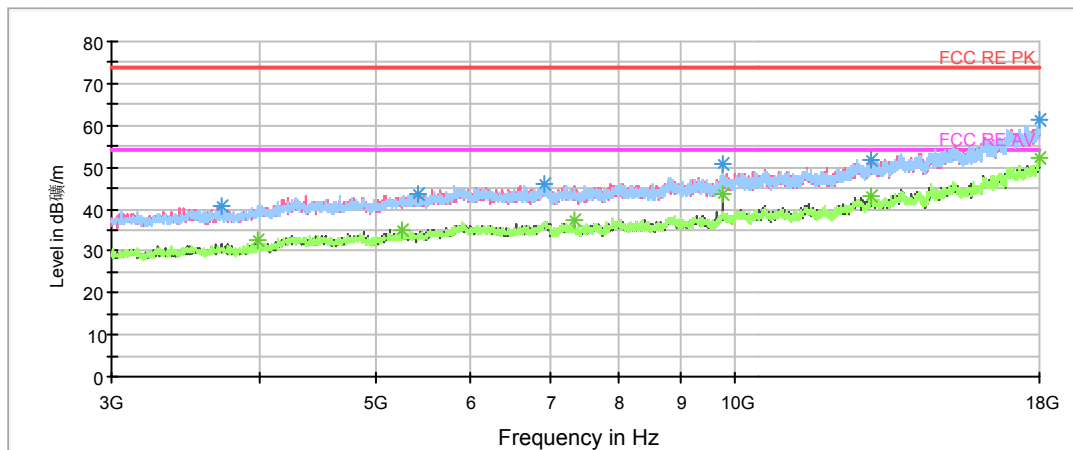

- FCC RE PK
- FCC RE AV
- Preview Result 1V-PK+
- Preview Result 2V-AVG
- Preview Result 1H-PK+
- Preview Result 2H-AVG
- * Data Reduction Result 1 [1]-PK+
- * Data Reduction Result 2 [1]-AVG


Radiates Emission from 3GHz to 18GHz

| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 3982.500000 | 38.5 | 100.0 | H | 18.0 | 38.9 | 0.4 | 35.5 | 74 |
| 5257.500000 | 41.8 | 100.0 | H | 18.0 | 45.5 | 3.7 | 32.2 | 74 |
| 7321.875000 | 44.9 | 100.0 | H | 311.0 | 53.4 | 8.5 | 29.1 | 74 |
| 9763.125000 | 50.6 | 100.0 | V | 25.0 | 62.4 | 11.8 | 23.4 | 74 |
| 12999.375000 | 49.7 | 100.0 | H | 74.0 | 65.9 | 16.2 | 24.3 | 74 |
| 17996.250000 | 58.9 | 100.0 | H | 52.0 | 84.3 | 25.4 | 15.1 | 74 |

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 3982.500000 | 32.7 | 100.0 | H | 18.0 | 33.1 | 0.4 | 21.3 | 54 |
| 5257.500000 | 34.9 | 100.0 | H | 18.0 | 38.6 | 3.7 | 19.1 | 54 |
| 7321.875000 | 37.3 | 100.0 | H | 311.0 | 45.8 | 8.5 | 16.7 | 54 |
| 9763.125000 | 43.4 | 100.0 | V | 25.0 | 55.2 | 11.8 | 10.6 | 54 |
| 12999.375000 | 43.0 | 100.0 | H | 74.0 | 59.2 | 16.2 | 11.0 | 54 |
| 17996.250000 | 52.0 | 100.0 | H | 52.0 | 77.4 | 25.4 | 2.0 | 54 |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 18-26.5GHz PK+AV

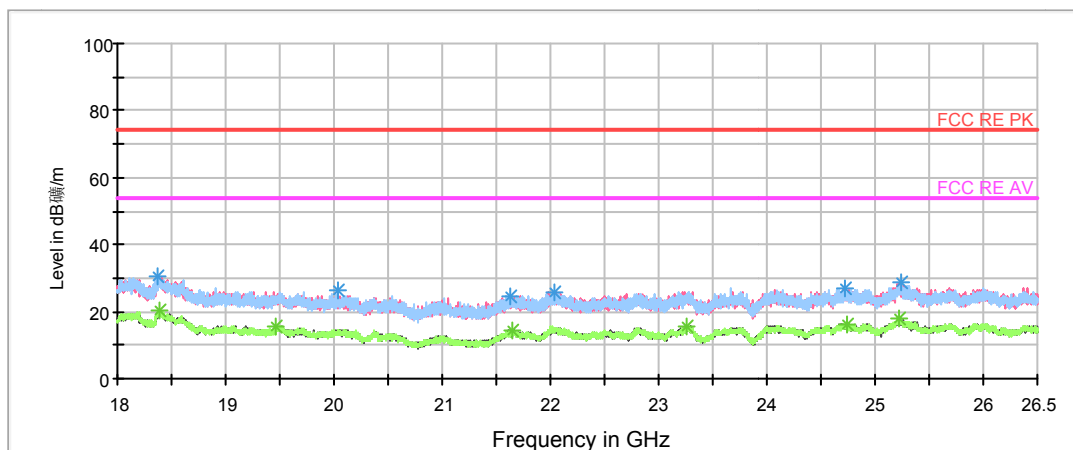

- FCC RE PK
- FCC RE AV
- Preview Result 1V-PK+
- Preview Result 2V-AVG
- Preview Result 1H-PK+
- Preview Result 2H-AVG
- * Data Reduction Result 1 [1]-PK+
- * Data Reduction Result 2 [1]-AVG

Radiates Emission from 18GHz to 26.5GHz


| Frequency (MHz) | Peak (dBuV/m) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 18391.000000 | 28.0 | H | 0.0 | 32.9 | -4.9 | 46.0 | 74 |
| 19471.562500 | 23.8 | H | 0.0 | 31.8 | -8.0 | 50.2 | 74 |
| 21642.250000 | 24.0 | H | 0.0 | 33.1 | -9.1 | 50.0 | 74 |
| 23262.562500 | 24.0 | V | 0.0 | 31.3 | -7.3 | 50.0 | 74 |
| 24733.062500 | 24.9 | H | 0.0 | 31.2 | -6.3 | 49.1 | 74 |
| 25226.062500 | 27.4 | V | 0.0 | 33.3 | -5.9 | 46.6 | 74 |

| Frequency (MHz) | Average (dBuV/m) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 18391.000000 | 20.1 | H | 0.0 | 25.0 | -4.9 | 33.9 | 54 |
| 19471.562500 | 15.5 | H | 0.0 | 23.5 | -8.0 | 38.5 | 54 |
| 21642.250000 | 14.6 | H | 0.0 | 23.7 | -9.1 | 39.4 | 54 |
| 23262.562500 | 15.6 | V | 0.0 | 22.9 | -7.3 | 38.4 | 54 |
| 24733.062500 | 16.3 | H | 0.0 | 22.6 | -6.3 | 37.7 | 54 |
| 25226.062500 | 18.2 | V | 0.0 | 24.1 | -5.9 | 35.8 | 54 |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



RE 0.03-1GHz QP Class B

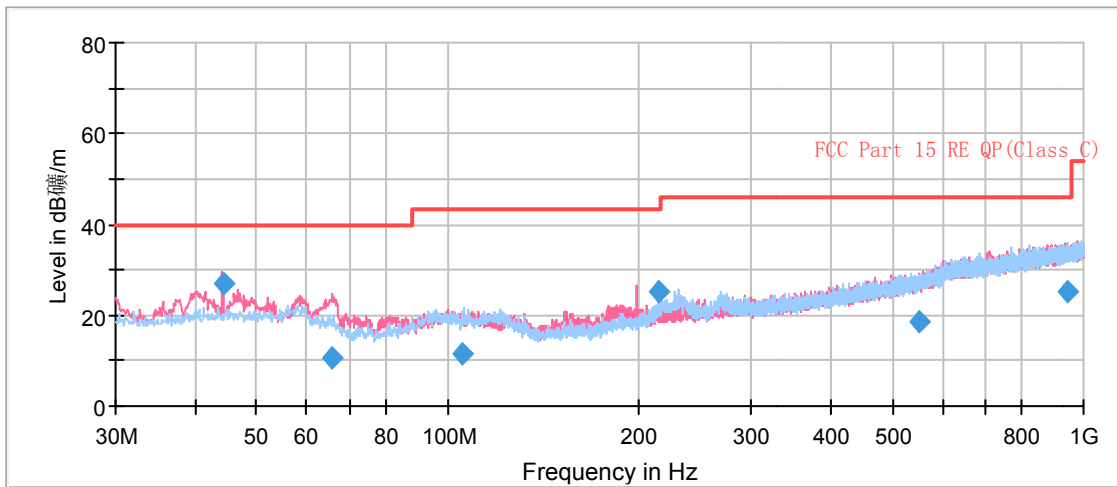


Radiates Emission from 30MHz to 1GHz

| Frequency (MHz) | Quasi-Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 44.266250 | 26.9 | 100.0 | V | 2.0 | 40.0 | 13.1 | 13.1 | 40.0 |
| 65.490000 | 10.6 | 100.0 | V | 117.0 | 20.9 | 10.3 | 29.4 | 40.0 |
| 105.421250 | 11.6 | 125.0 | H | 8.0 | 24.4 | 12.8 | 31.9 | 43.5 |
| 214.502500 | 25.0 | 100.0 | V | 44.0 | 37.6 | 12.6 | 18.5 | 43.5 |
| 551.976250 | 18.6 | 114.0 | V | 97.0 | 39.7 | 21.1 | 27.4 | 46.0 |
| 945.281250 | 25.2 | 125.0 | V | 331.0 | 51.2 | 26.0 | 20.8 | 46.0 |

- Remark:**
1. Quasi-Peak = Reading value + Correction factor
 2. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)
 3. Margin = Limit – Quasi-Peak

RE Bluetooth PK+AV

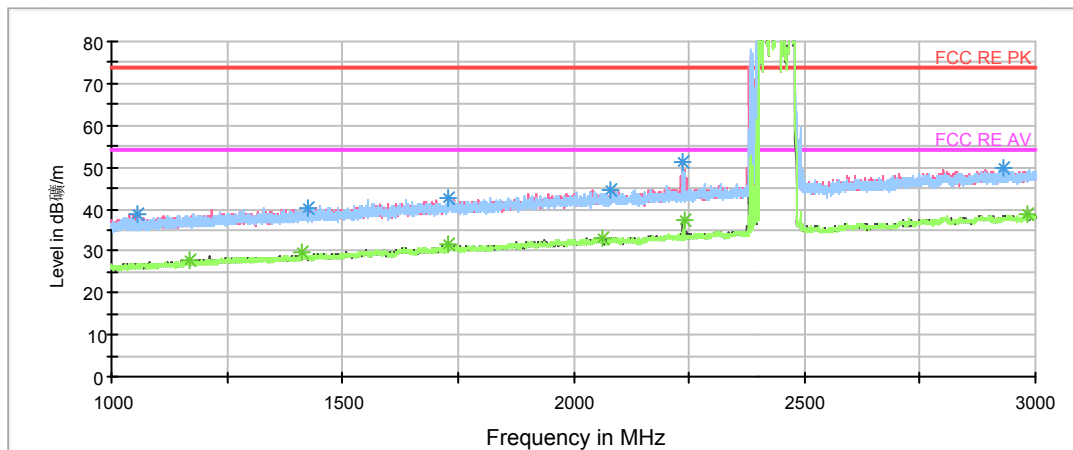

- FCC RE PK
- FCC RE AV
- Preview Result 1V-PK+
- Preview Result 2V-AVG
- Preview Result 1H-PK+
- Preview Result 2H-AVG
- * Data Reduction Result 1 [2]-PK+
- * Data Reduction Result 2 [2]-AVG


Radiates Emission from 1GHz to 3GHz

| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1169.250000 | 37.2 | 100.0 | H | 265.0 | 44.3 | -7.1 | 36.8 | 74 |
| 1413.250000 | 38.3 | 100.0 | V | 128.0 | 44.5 | -6.2 | 35.7 | 74 |
| 1729.250000 | 39.9 | 100.0 | H | 2.0 | 43.1 | -3.2 | 34.1 | 74 |
| 2061.500000 | 41.7 | 100.0 | V | 174.0 | 43.2 | -1.5 | 32.3 | 74 |
| 2238.750000 | 49.0 | 100.0 | H | 49.0 | 50.0 | -1.0 | 25.0 | 74 |
| 2980.750000 | 47.5 | 100.0 | H | 2.0 | 51.3 | 3.8 | 26.5 | 74 |

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1169.250000 | 27.8 | 100.0 | H | 265.0 | 34.9 | -7.1 | 26.2 | 54 |
| 1413.250000 | 29.5 | 100.0 | V | 128.0 | 35.7 | -6.2 | 24.5 | 54 |
| 1729.250000 | 31.5 | 100.0 | H | 2.0 | 34.7 | -3.2 | 22.5 | 54 |
| 2061.500000 | 33.1 | 100.0 | V | 174.0 | 34.6 | -1.5 | 20.9 | 54 |
| 2238.750000 | 37.4 | 100.0 | H | 49.0 | 38.4 | -1.0 | 16.6 | 54 |
| 2980.750000 | 38.9 | 100.0 | H | 2.0 | 42.7 | 3.8 | 15.1 | 54 |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 3-18GHz PK+AV

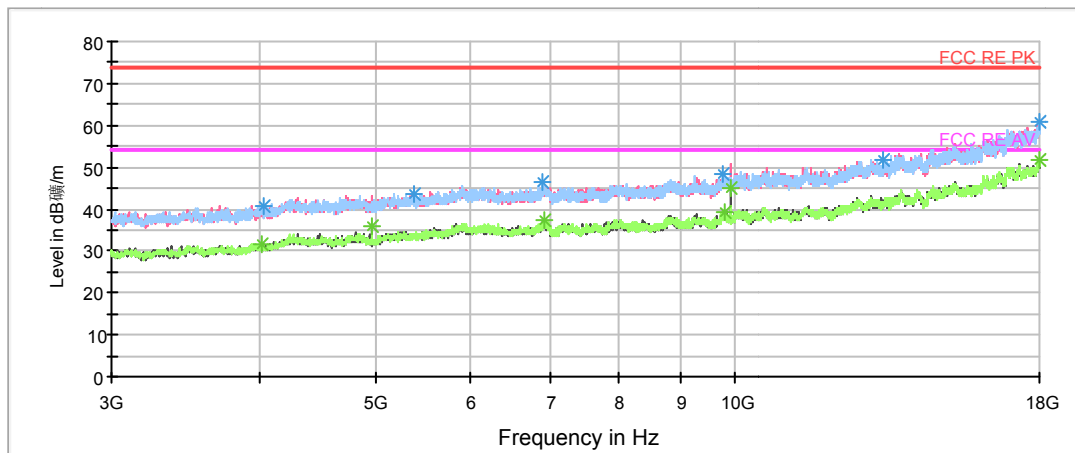

- FCC RE PK
- FCC RE AV
- Preview Result 1H-PK+
- Preview Result 2H-AVG
- * Data Reduction Result 1 [1]-PK+
- * Data Reduction Result 2 [1]-AVG


Radiates Emission from 3GHz to 18GHz

| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 4010.625000 | 39.9 | 100.0 | H | 207.0 | 40.4 | 0.5 | 34.1 | 74 |
| 4959.375000 | 43.0 | 100.0 | V | 325.0 | 46.0 | 3.0 | 31.0 | 74 |
| 6920.625000 | 45.3 | 100.0 | H | 139.0 | 52.2 | 6.9 | 28.7 | 74 |
| 9795.000000 | 46.3 | 100.0 | H | 7.0 | 58.5 | 12.2 | 27.7 | 74 |
| 9920.625000 | 50.8 | 100.0 | V | 25.0 | 62.4 | 11.6 | 23.2 | 74 |
| 17986.875000 | 58.8 | 100.0 | V | 335.0 | 84.0 | 25.2 | 15.2 | 74 |

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 4010.625000 | 31.8 | 100.0 | H | 207.0 | 32.3 | 0.5 | 22.2 | 54 |
| 4959.375000 | 36.1 | 100.0 | V | 325.0 | 39.1 | 3.0 | 17.9 | 54 |
| 6920.625000 | 37.2 | 100.0 | H | 139.0 | 44.1 | 6.9 | 16.8 | 54 |
| 9795.000000 | 39.5 | 100.0 | H | 7.0 | 51.7 | 12.2 | 14.5 | 54 |
| 9920.625000 | 45.3 | 100.0 | V | 25.0 | 56.9 | 11.6 | 8.7 | 54 |
| 17986.875000 | 51.8 | 100.0 | V | 335.0 | 77.0 | 25.2 | 2.2 | 54 |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 18-26.5GHz PK+AV

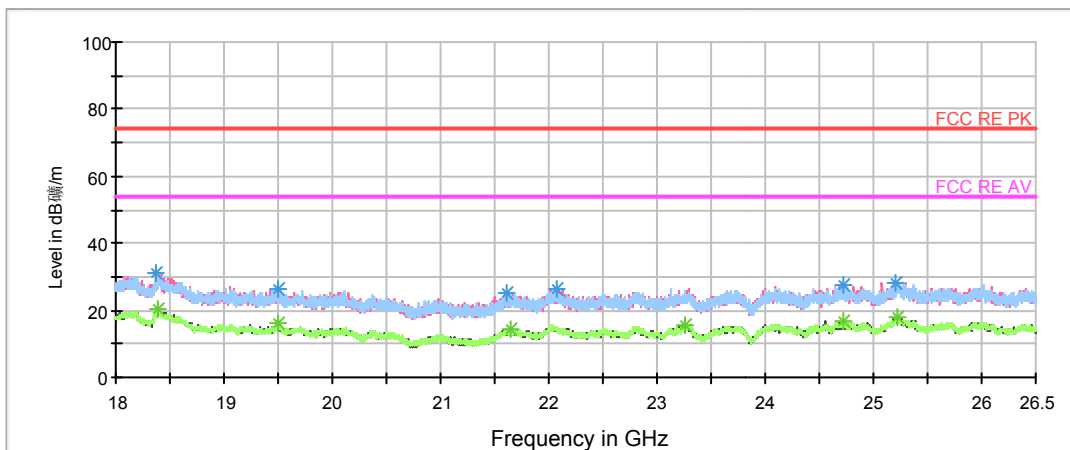

- FCC RE PK
- FCC RE AV
- Preview Result 1V-PK+
- Preview Result 2V-AVG
- Preview Result 1H-PK+
- Preview Result 2H-AVG
- * Data Reduction Result 1 [1]-PK+
- * Data Reduction Result 2 [1]-AVG

Radiates Emission from 18GHz to 26.5GHz


| Frequency (MHz) | Peak (dBuV/m) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 18392.062500 | 29.0 | V | 0.0 | 33.9 | -4.9 | 45.0 | 74 |
| 19499.187500 | 25.7 | H | 0.0 | 33.2 | -7.5 | 48.3 | 74 |
| 21652.875000 | 22.6 | V | 0.0 | 31.8 | -9.2 | 51.4 | 74 |
| 23267.875000 | 23.0 | V | 0.0 | 30.3 | -7.3 | 51.0 | 74 |
| 24725.625000 | 26.0 | V | 0.0 | 32.2 | -6.2 | 48.0 | 74 |
| 25220.750000 | 26.0 | H | 0.0 | 32.0 | -6.0 | 48.0 | 74 |

| Frequency (MHz) | Average (dBuV/m) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 18392.062500 | 20.2 | V | 0.0 | 25.1 | -4.9 | 33.8 | 54 |
| 19499.187500 | 15.9 | H | 0.0 | 23.4 | -7.5 | 38.1 | 54 |
| 21652.875000 | 14.4 | V | 0.0 | 23.6 | -9.2 | 39.6 | 54 |
| 23267.875000 | 15.5 | V | 0.0 | 22.8 | -7.3 | 38.5 | 54 |
| 24725.625000 | 16.6 | V | 0.0 | 22.8 | -6.2 | 37.4 | 54 |
| 25220.750000 | 18.2 | H | 0.0 | 24.2 | -6.0 | 35.8 | 54 |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)




RE 0.03-1GHz QP Class B

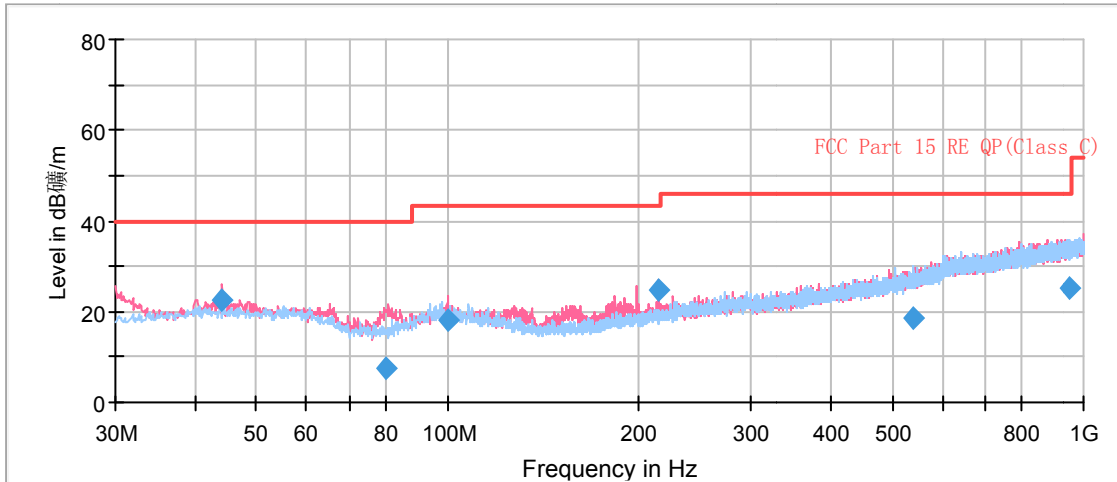

Radiates Emission from 30MHz to 1GHz

| Frequency (MHz) | Quasi-Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 44.226250 | 22.3 | 100.0 | V | 332.0 | 35.4 | 13.1 | 17.7 | 40.0 |
| 80.203750 | 7.6 | 100.0 | V | 75.0 | 16.2 | 8.6 | 32.4 | 40.0 |
| 100.163750 | 18.3 | 113.0 | V | 146.0 | 31.5 | 13.2 | 25.2 | 43.5 |
| 214.501250 | 24.8 | 100.0 | V | 156.0 | 37.4 | 12.6 | 18.7 | 43.5 |
| 539.971250 | 18.5 | 100.0 | H | 17.0 | 39.3 | 20.8 | 27.5 | 46.0 |
| 948.146250 | 25.1 | 100.0 | H | 17.0 | 51.1 | 26.0 | 20.9 | 46.0 |

RE Bluetooth PK+AV

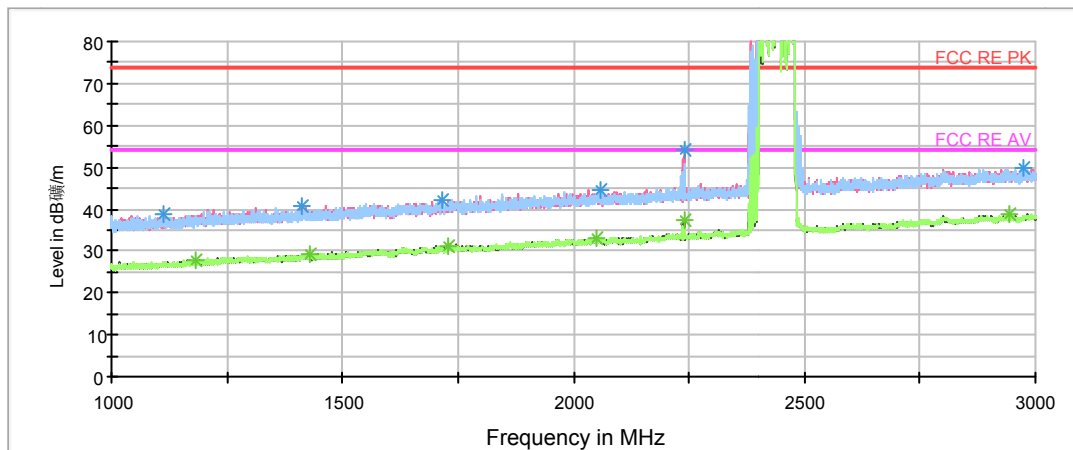

- FCC RE PK
- FCC RE AV
- Preview Result 1V-PK+
- Preview Result 2V-AVG
- Preview Result 1H-PK+
- Preview Result 2H-AVG
- * Data Reduction Result 1 [2]-PK+
- * Data Reduction Result 2 [2]-AVG

Radiates Emission from 1GHz to 3GHz


Note: The signal beyond the limit is carrier.

| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1183.750000 | 37.7 | 100.0 | H | 19.0 | 44.9 | -7.2 | 36.3 | 74 |
| 1427.500000 | 39.1 | 100.0 | H | 67.0 | 45.1 | -6.0 | 34.9 | 74 |
| 1730.500000 | 40.4 | 100.0 | H | 19.0 | 43.4 | -3.0 | 33.6 | 74 |
| 2051.500000 | 42.5 | 100.0 | V | 162.0 | 44.4 | -1.9 | 31.5 | 74 |
| 2240.250000 | 52.4 | 100.0 | V | 23.0 | 53.4 | -1.0 | 21.6 | 74 |
| 2945.000000 | 47.5 | 100.0 | H | 233.0 | 50.9 | 3.4 | 26.5 | 74 |

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1183.750000 | 27.9 | 100.0 | H | 19.0 | 35.1 | -7.2 | 26.1 | 54 |
| 1427.500000 | 29.2 | 100.0 | H | 67.0 | 35.2 | -6.0 | 24.8 | 54 |
| 1730.500000 | 31.2 | 100.0 | H | 19.0 | 34.2 | -3.0 | 22.8 | 54 |
| 2051.500000 | 33.2 | 100.0 | V | 162.0 | 35.1 | -1.9 | 20.8 | 54 |
| 2240.250000 | 37.1 | 100.0 | V | 23.0 | 38.1 | -1.0 | 16.9 | 54 |
| 2945.000000 | 38.8 | 100.0 | H | 233.0 | 42.2 | 3.4 | 15.2 | 54 |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 3-18GHz PK+AV

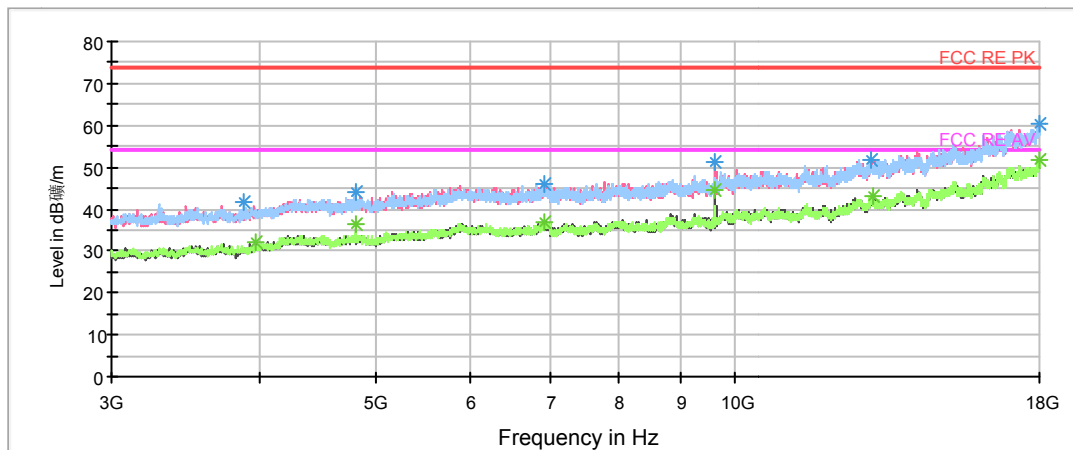

- FCC RE PK
- FCC RE AV
- Preview Result 1V-PK+
- Preview Result 2V-AVG
- Preview Result 1H-PK+
- Preview Result 2H-AVG
- * Data Reduction Result 1 [1]-PK+
- * Data Reduction Result 2 [1]-AVG


Radiates Emission from 3GHz to 18GHz

| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 3971.250000 | 39.1 | 100.0 | V | 108.0 | 39.4 | 0.3 | 34.9 | 74 |
| 4803.750000 | 43.6 | 100.0 | H | 16.0 | 46.3 | 2.7 | 30.4 | 74 |
| 6909.375000 | 43.0 | 100.0 | H | 95.0 | 49.9 | 6.9 | 31.0 | 74 |
| 9607.500000 | 51.2 | 100.0 | V | 10.0 | 61.2 | 10.0 | 22.8 | 74 |
| 13059.375000 | 49.5 | 100.0 | H | 39.0 | 65.7 | 16.2 | 24.5 | 74 |
| 17970.000000 | 57.8 | 100.0 | V | 258.0 | 82.9 | 25.1 | 16.2 | 74 |

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 3971.250000 | 32.2 | 100.0 | V | 108.0 | 32.5 | 0.3 | 21.8 | 54 |
| 4803.750000 | 36.5 | 100.0 | H | 16.0 | 39.2 | 2.7 | 17.5 | 54 |
| 6909.375000 | 37.1 | 100.0 | H | 95.0 | 44.0 | 6.9 | 16.9 | 54 |
| 9607.500000 | 44.8 | 100.0 | V | 10.0 | 54.8 | 10.0 | 9.2 | 54 |
| 13059.375000 | 43.0 | 100.0 | H | 39.0 | 59.2 | 16.2 | 11.0 | 54 |
| 17970.000000 | 51.8 | 100.0 | V | 258.0 | 76.9 | 25.1 | 2.2 | 54 |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 18-26.5GHz PK+AV

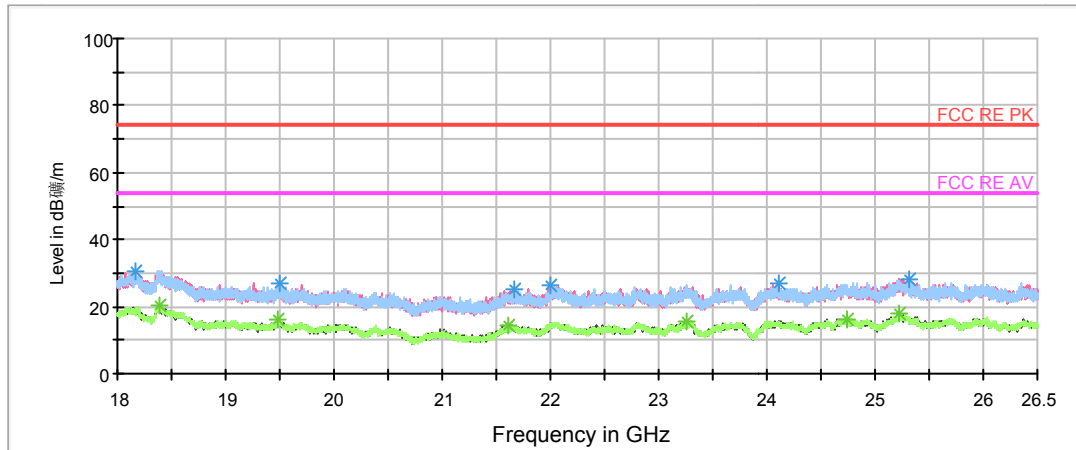

- FCC RE PK
- FCC RE AV
- Preview Result 1V-PK+
- Preview Result 2V-AVG
- Preview Result 1H-PK+
- Preview Result 2H-AVG
- * Data Reduction Result 1 [1]-PK+
- * Data Reduction Result 2 [1]-AVG

Radiates Emission from 18GHz to 26.5GHz


| Frequency (MHz) | Peak (dBuV/m) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 18393.125000 | 28.8 | V | 0.0 | 33.7 | -4.9 | 45.2 | 74 |
| 19486.437500 | 23.6 | V | 0.0 | 31.3 | -7.7 | 50.4 | 74 |
| 21617.812500 | 22.8 | H | 0.0 | 31.8 | -9.0 | 51.2 | 74 |
| 23265.750000 | 24.0 | H | 0.0 | 31.3 | -7.3 | 50.0 | 74 |
| 24738.375000 | 24.3 | V | 0.0 | 30.7 | -6.4 | 49.7 | 74 |
| 25214.375000 | 24.9 | V | 0.0 | 31.0 | -6.1 | 49.1 | 74 |

| Frequency (MHz) | Average (dBuV/m) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 18393.125000 | 20.4 | V | 0.0 | 25.3 | -4.9 | 33.6 | 54 |
| 19486.437500 | 15.9 | V | 0.0 | 23.6 | -7.7 | 38.1 | 54 |
| 21617.812500 | 14.6 | H | 0.0 | 23.6 | -9.0 | 39.4 | 54 |
| 23265.750000 | 15.6 | H | 0.0 | 22.9 | -7.3 | 38.4 | 54 |
| 24738.375000 | 16.4 | V | 0.0 | 22.8 | -6.4 | 37.6 | 54 |
| 25214.375000 | 17.9 | V | 0.0 | 24.0 | -6.1 | 36.1 | 54 |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)




RE 0.03-1GHz QP Class B

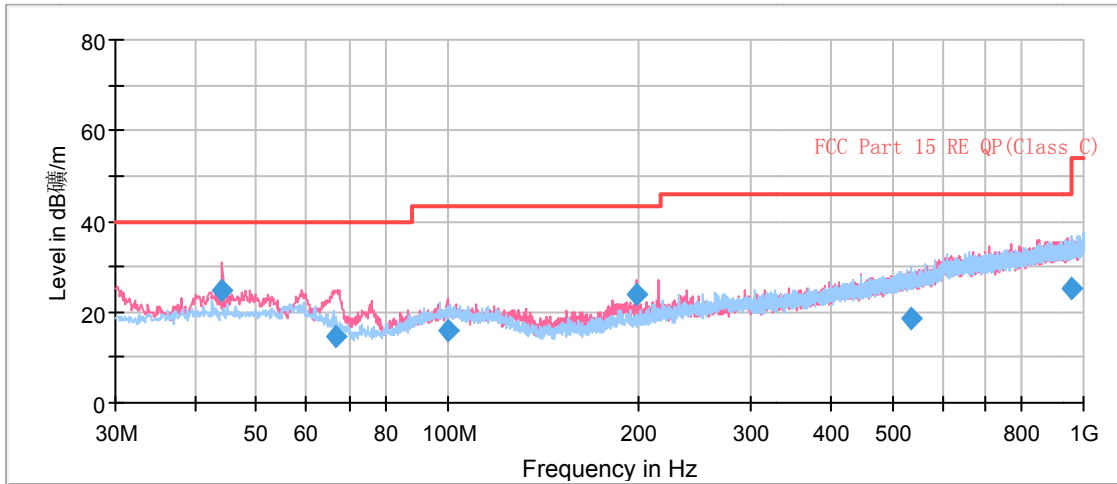

Radiates Emission from 30MHz to 1GHz

| Frequency (MHz) | Quasi-Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 44.226250 | 24.7 | 100.0 | V | 307.0 | 37.8 | 13.1 | 15.3 | 40.0 |
| 66.578750 | 14.7 | 125.0 | V | 302.0 | 24.6 | 9.9 | 25.3 | 40.0 |
| 100.160000 | 15.9 | 100.0 | V | 347.0 | 29.1 | 13.2 | 27.6 | 43.5 |
| 198.011250 | 24.1 | 100.0 | V | 90.0 | 36.0 | 11.9 | 19.4 | 43.5 |
| 536.260000 | 18.7 | 100.0 | H | 27.0 | 39.4 | 20.7 | 27.3 | 46.0 |
| 955.212500 | 25.3 | 100.0 | H | 189.0 | 51.4 | 26.1 | 20.7 | 46.0 |

RE Bluetooth PK+AV

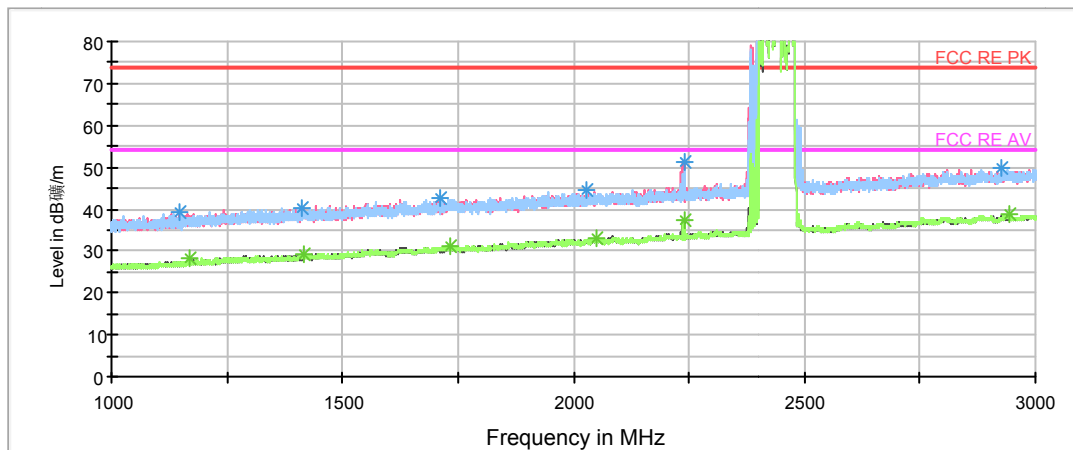

- FCC RE PK
- FCC RE AV
- Preview Result 1V-PK+
- Preview Result 2V-AVG
- Preview Result 1H-PK+
- Preview Result 2H-AVG
- * Data Reduction Result 1 [2]-PK+
- * Data Reduction Result 2 [2]-AVG

Radiates Emission from 1GHz to 3GHz


Note: The signal beyond the limit is carrier.

| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1169.250000 | 36.7 | 100.0 | H | 11.0 | 43.8 | -7.1 | 37.3 | 74 |
| 1416.000000 | 38.7 | 100.0 | H | 132.0 | 44.7 | -6.0 | 35.3 | 74 |
| 1731.250000 | 41.4 | 100.0 | H | 120.0 | 44.3 | -2.9 | 32.6 | 74 |
| 2050.750000 | 42.4 | 100.0 | V | 217.0 | 44.3 | -1.9 | 31.6 | 74 |
| 2238.750000 | 51.0 | 100.0 | V | 0.0 | 52.0 | -1.0 | 23.0 | 74 |
| 2943.500000 | 46.9 | 100.0 | H | 168.0 | 50.3 | 3.4 | 27.1 | 74 |

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1169.250000 | 28.1 | 100.0 | H | 11.0 | 35.2 | -7.1 | 25.9 | 54 |
| 1416.000000 | 29.4 | 100.0 | H | 132.0 | 35.4 | -6.0 | 24.6 | 54 |
| 1731.250000 | 31.2 | 100.0 | H | 120.0 | 34.1 | -2.9 | 22.8 | 54 |
| 2050.750000 | 32.9 | 100.0 | V | 217.0 | 34.8 | -1.9 | 21.1 | 54 |
| 2238.750000 | 37.5 | 100.0 | V | 0.0 | 38.5 | -1.0 | 16.5 | 54 |
| 2943.500000 | 38.7 | 100.0 | H | 168.0 | 42.1 | 3.4 | 15.3 | 54 |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 3-18GHz PK+AV

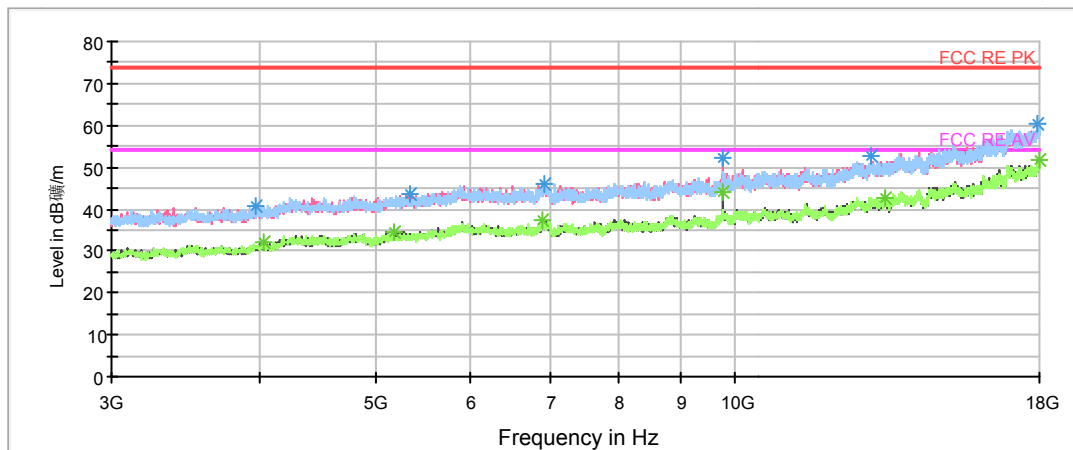

- FCC RE PK
- FCC RE AV
- Preview Result 1V-PK+
- Preview Result 2V-AVG
- Preview Result 1H-PK+
- Preview Result 2H-AVG
- * Data Reduction Result 1 [1]-PK+
- * Data Reduction Result 2 [1]-AVG


Radiates Emission from 3GHz to 18GHz

| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 4018.125000 | 39.3 | 100.0 | V | 88.0 | 39.8 | 0.5 | 34.7 | 74 |
| 5167.500000 | 40.9 | 100.0 | H | 262.0 | 44.5 | 3.6 | 33.1 | 74 |
| 6890.625000 | 44.0 | 100.0 | V | 359.0 | 50.9 | 6.9 | 30.0 | 74 |
| 9763.125000 | 52.4 | 100.0 | V | 337.0 | 64.2 | 11.8 | 21.6 | 74 |
| 13350.000000 | 50.1 | 100.0 | V | 110.0 | 65.9 | 15.8 | 23.9 | 74 |
| 17985.000000 | 58.5 | 100.0 | H | 101.0 | 83.7 | 25.2 | 15.5 | 74 |

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 4018.125000 | 32.1 | 100.0 | V | 88.0 | 32.6 | 0.5 | 21.9 | 54 |
| 5167.500000 | 34.5 | 100.0 | H | 262.0 | 38.1 | 3.6 | 19.5 | 54 |
| 6890.625000 | 37.2 | 100.0 | V | 359.0 | 44.1 | 6.9 | 16.8 | 54 |
| 9763.125000 | 44.3 | 100.0 | V | 337.0 | 56.1 | 11.8 | 9.7 | 54 |
| 13350.000000 | 42.8 | 100.0 | V | 110.0 | 58.6 | 15.8 | 11.2 | 54 |
| 17985.000000 | 51.7 | 100.0 | H | 101.0 | 76.9 | 25.2 | 2.3 | 54 |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 18-26.5GHz PK+AV

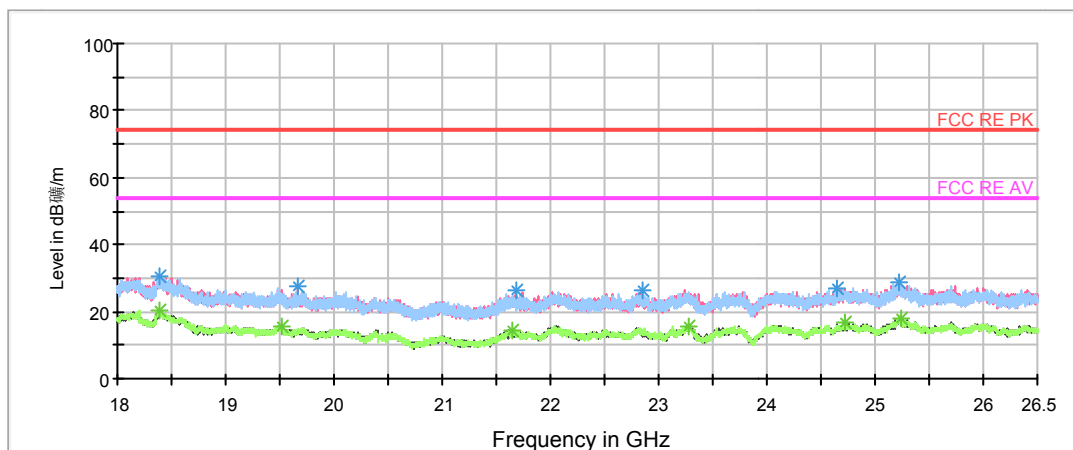

- FCC RE PK
- FCC RE AV
- Preview Result 1H-PK+
- Preview Result 2H-AVG
- * Data Reduction Result 1 [1]-PK+
- * Data Reduction Result 2 [1]-AVG


Radiates Emission from 18GHz to 26.5GHz

| Frequency (MHz) | Peak (dBuV/m) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 18381.437500 | 28.6 | V | 0.0 | 33.4 | -4.8 | 45.4 | 74 |
| 19517.250000 | 22.7 | H | 0.0 | 30.1 | -7.4 | 51.3 | 74 |
| 21652.875000 | 22.4 | H | 0.0 | 31.6 | -9.2 | 51.6 | 74 |
| 23278.500000 | 25.7 | H | 0.0 | 32.9 | -7.2 | 48.3 | 74 |
| 24728.812500 | 26.0 | V | 0.0 | 32.2 | -6.2 | 48.0 | 74 |
| 25232.437500 | 26.8 | H | 0.0 | 32.7 | -5.9 | 47.2 | 74 |

| Frequency (MHz) | Average (dBuV/m) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 18381.437500 | 20.5 | V | 0.0 | 25.3 | -4.8 | 33.5 | 54 |
| 19517.250000 | 15.5 | H | 0.0 | 22.9 | -7.4 | 38.5 | 54 |
| 21652.875000 | 14.5 | H | 0.0 | 23.7 | -9.2 | 39.5 | 54 |
| 23278.500000 | 15.6 | H | 0.0 | 22.8 | -7.2 | 38.4 | 54 |
| 24728.812500 | 16.7 | V | 0.0 | 22.9 | -6.2 | 37.3 | 54 |
| 25232.437500 | 18.1 | H | 0.0 | 24.0 | -5.9 | 35.9 | 54 |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


RE 0.03-1GHz QP Class B

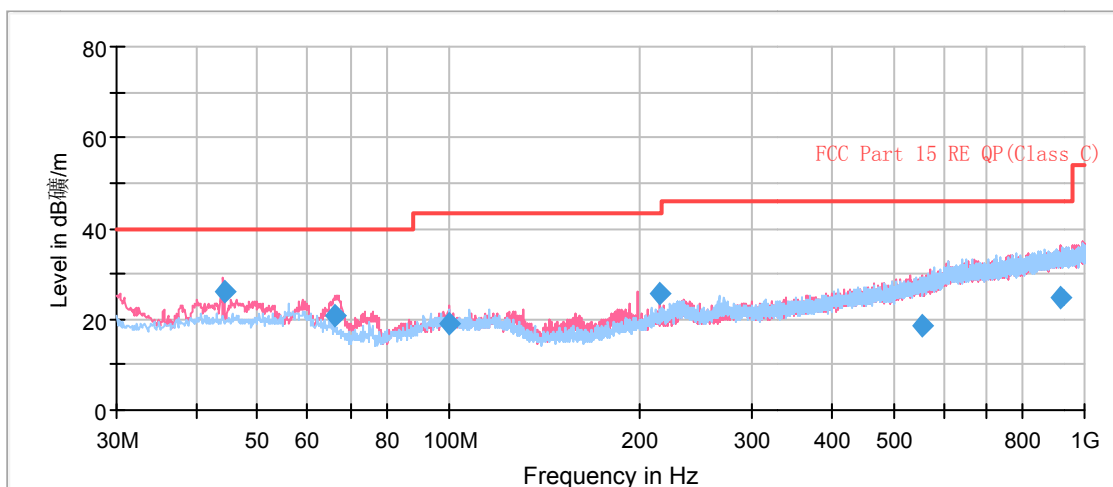

Radiates Emission from 30MHz to 1GHz

| Frequency (MHz) | Quasi-Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 44.266250 | 26.2 | 100.0 | V | 66.0 | 39.3 | 13.1 | 13.8 | 40.0 |
| 66.217500 | 20.8 | 100.0 | V | 280.0 | 30.9 | 10.1 | 19.2 | 40.0 |
| 100.163750 | 19.0 | 114.0 | V | 270.0 | 32.2 | 13.2 | 24.5 | 43.5 |
| 214.501250 | 25.8 | 100.0 | V | 0.0 | 38.4 | 12.6 | 17.7 | 43.5 |
| 556.057500 | 18.8 | 114.0 | V | 17.0 | 40.0 | 21.2 | 27.2 | 46.0 |
| 914.880000 | 24.9 | 100.0 | V | 122.0 | 50.7 | 25.8 | 21.1 | 46.0 |

RE Bluetooth PK+AV

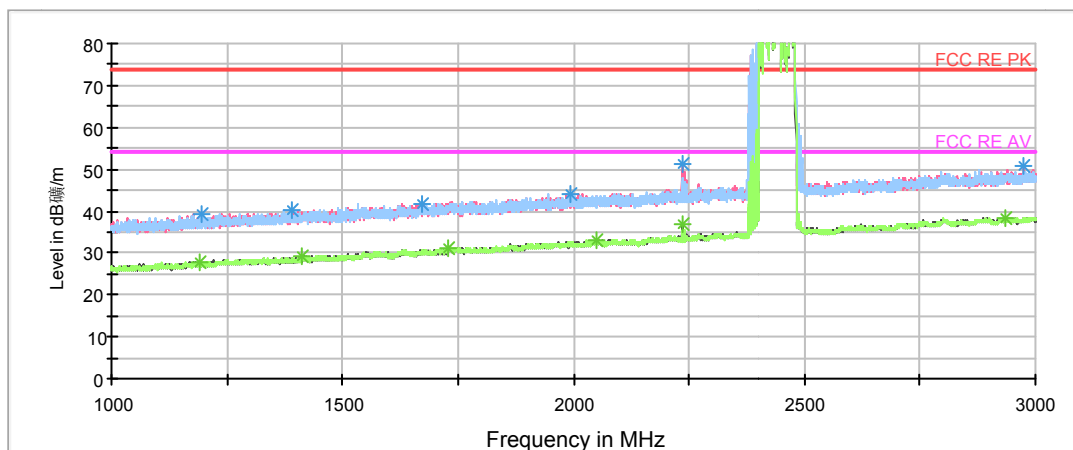

- FCC RE PK
- FCC RE AV
- Preview Result 1V-PK+
- Preview Result 2V-AVG
- Preview Result 1H-PK+
- Preview Result 2H-AVG
- * Data Reduction Result 1 [2]-PK+
- * Data Reduction Result 2 [2]-AVG

Radiates Emission from 1GHz to 3GHz


Note: The signal beyond the limit is carrier.

| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1189.000000 | 36.7 | 100.0 | H | 98.0 | 44.1 | -7.4 | 37.3 | 74 |
| 1414.250000 | 39.5 | 100.0 | V | 280.0 | 45.6 | -6.1 | 34.5 | 74 |
| 1730.750000 | 40.8 | 100.0 | V | 245.0 | 43.8 | -3.0 | 33.2 | 74 |
| 2047.750000 | 42.0 | 100.0 | H | 87.0 | 44.0 | -2.0 | 32.0 | 74 |
| 2236.250000 | 48.6 | 100.0 | V | 8.0 | 49.6 | -1.0 | 25.4 | 74 |
| 2936.750000 | 47.8 | 100.0 | V | 137.0 | 51.1 | 3.3 | 26.2 | 74 |

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1189.000000 | 27.7 | 100.0 | H | 98.0 | 35.1 | -7.4 | 26.3 | 54 |
| 1414.250000 | 29.2 | 100.0 | V | 280.0 | 35.3 | -6.1 | 24.8 | 54 |
| 1730.750000 | 31.3 | 100.0 | V | 245.0 | 34.3 | -3.0 | 22.7 | 54 |
| 2047.750000 | 33.0 | 100.0 | H | 87.0 | 35.0 | -2.0 | 21.0 | 54 |
| 2236.250000 | 36.7 | 100.0 | V | 8.0 | 37.7 | -1.0 | 17.3 | 54 |
| 2936.750000 | 38.5 | 100.0 | V | 137.0 | 41.8 | 3.3 | 15.5 | 54 |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 3-18GHz PK+AV

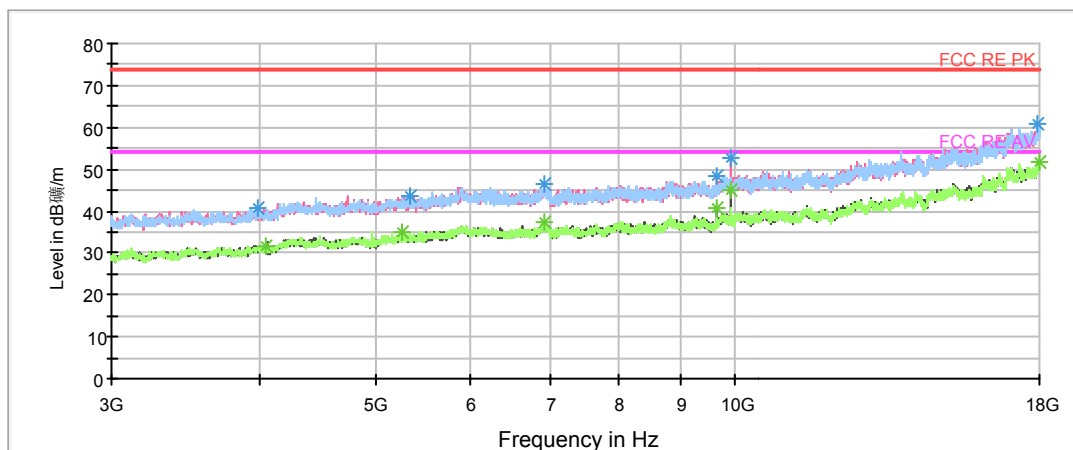

- FCC RE PK
- FCC RE AV
- Preview Result 1V-PK+
- Preview Result 2V-AVG
- Preview Result 1H-PK+
- Preview Result 2H-AVG
- * Data Reduction Result 1 [1]-PK+
- * Data Reduction Result 2 [1]-AVG


Radiates Emission from 3GHz to 18GHz

| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 4036.875000 | 38.1 | 100.0 | V | 358.0 | 38.7 | 0.6 | 35.9 | 74 |
| 5263.125000 | 42.0 | 100.0 | H | 218.0 | 45.7 | 3.7 | 32.0 | 74 |
| 6924.375000 | 43.6 | 100.0 | V | 303.0 | 50.4 | 6.8 | 30.4 | 74 |
| 9648.750000 | 48.5 | 100.0 | V | 336.0 | 59.0 | 10.5 | 25.5 | 74 |
| 9920.625000 | 52.5 | 100.0 | V | 11.0 | 64.1 | 11.6 | 21.5 | 74 |
| 17983.125000 | 59.7 | 100.0 | H | 82.0 | 84.9 | 25.2 | 14.3 | 74 |

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 4036.875000 | 31.8 | 100.0 | V | 358.0 | 32.4 | 0.6 | 22.2 | 54 |
| 5263.125000 | 34.9 | 100.0 | H | 218.0 | 38.6 | 3.7 | 19.1 | 54 |
| 6924.375000 | 37.1 | 100.0 | V | 303.0 | 43.9 | 6.8 | 16.9 | 54 |
| 9648.750000 | 40.9 | 100.0 | V | 336.0 | 51.4 | 10.5 | 13.1 | 54 |
| 9920.625000 | 45.1 | 100.0 | V | 11.0 | 56.7 | 11.6 | 8.9 | 54 |
| 17983.125000 | 51.8 | 100.0 | H | 82.0 | 77.0 | 25.2 | 2.2 | 54 |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 18-26.5GHz PK+AV

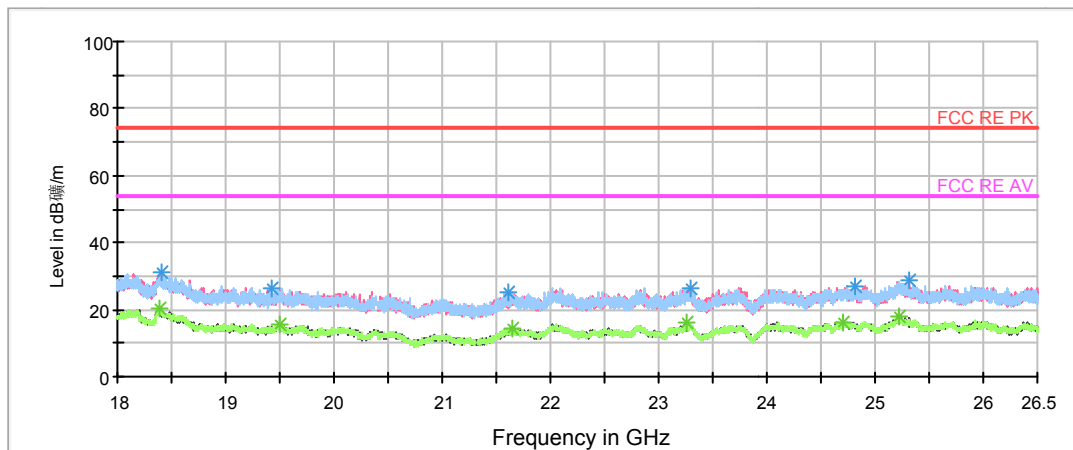

- FCC RE PK
- FCC RE AV
- Preview Result 1V-PK+
- Preview Result 2V-AVG
- Preview Result 1H-PK+
- Preview Result 2H-AVG
- * Data Reduction Result 1 [1]-PK+
- * Data Reduction Result 2 [1]-AVG

Radiates Emission from 18GHz to 26.5GHz

| Frequency (MHz) | Peak (dBuV/m) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 18388.875000 | 28.9 | H | 0.0 | 33.8 | -4.9 | 45.1 | 74 |
| 19497.062500 | 23.6 | V | 0.0 | 31.1 | -7.5 | 50.4 | 74 |
| 21653.937500 | 23.0 | V | 0.0 | 32.2 | -9.2 | 51.0 | 74 |
| 23267.875000 | 23.8 | H | 0.0 | 31.1 | -7.3 | 50.2 | 74 |
| 24702.250000 | 25.5 | H | 0.0 | 32.2 | -6.7 | 48.5 | 74 |
| 25227.125000 | 27.0 | V | 0.0 | 32.9 | -5.9 | 47.0 | 74 |

| Frequency (MHz) | Average (dBuV/m) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 18388.875000 | 20.3 | H | 0.0 | 25.2 | -4.9 | 33.7 | 54 |
| 19497.062500 | 15.7 | V | 0.0 | 23.2 | -7.5 | 38.3 | 54 |
| 21653.937500 | 14.3 | V | 0.0 | 23.5 | -9.2 | 39.7 | 54 |
| 23267.875000 | 15.9 | H | 0.0 | 23.2 | -7.3 | 38.1 | 54 |
| 24702.250000 | 16.4 | H | 0.0 | 23.1 | -6.7 | 37.6 | 54 |
| 25227.125000 | 18.1 | V | 0.0 | 24.0 | -5.9 | 35.9 | 54 |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

4.11 Conducted Emission


Ambient condition

| | | |
|-------------|-------------------|----------|
| Temperature | Relative humidity | Pressure |
| 23°C ~25°C | 45%~50% | 101.5kPa |

Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line. The test is in transmitting mode.

Test Setup

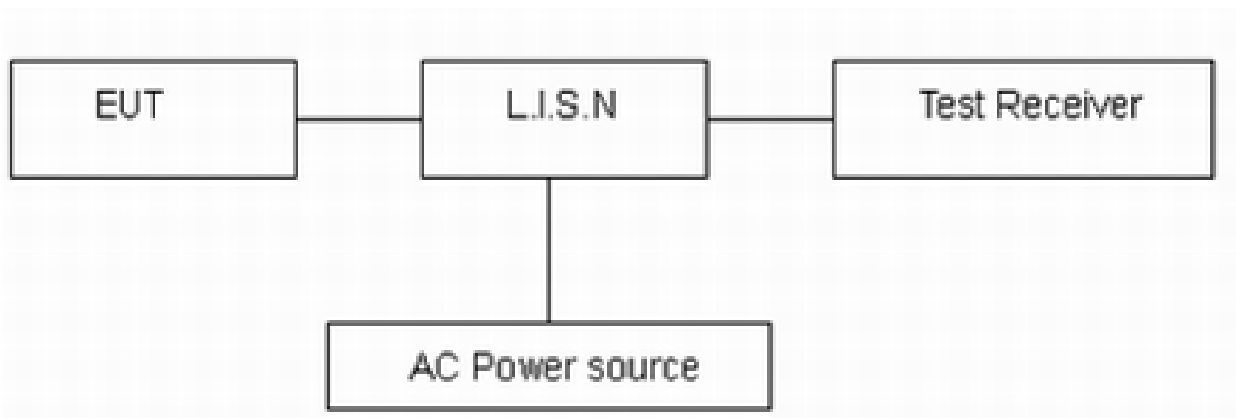

Note: AC Power source is used to change the voltage from 220V/50Hz to 110V/60Hz.

Limits

| Frequency (MHz) | Conducted Limits(dBμV) | |
|-----------------|------------------------|------------|
| | Quasi-peak | Average |
| 0.15 - 0.5 | 66 to 56 * | 56 to 46 * |
| 0.5 - 5 | 56 | 46 |
| 5 - 30 | 60 | 50 |


*: Decreases with the logarithm of the frequency.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U=2.69$ dB.

Test Results:

Following plots, Blue trace uses the peak detection, Green trace uses the average detection.
Basic Rate-CH0

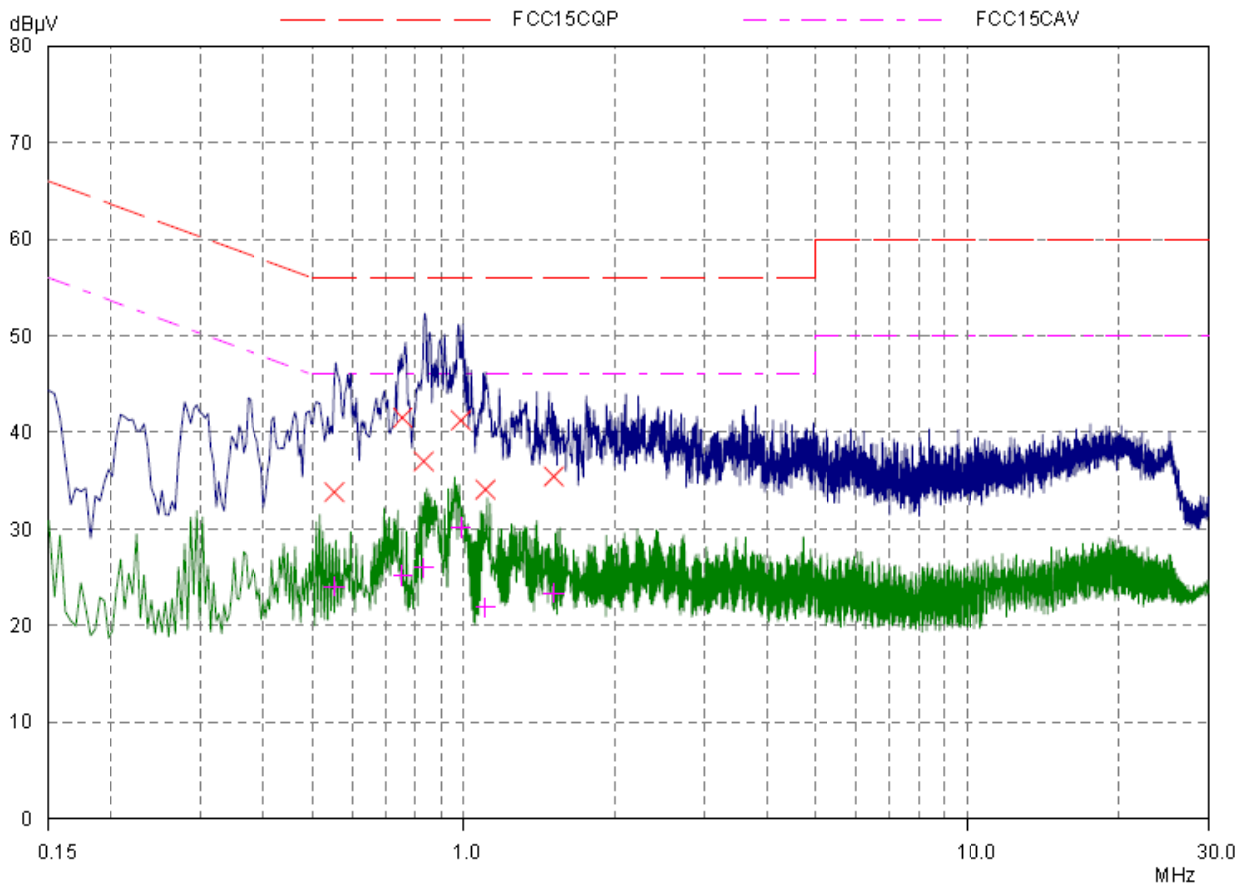


Final Measurement Results

| Frequency MHz | QP Level dBµV | QP Limit dBµV | QP Delta dB | Phase - | PE - |
|---------------|---------------|---------------|-------------|---------|------|
| 0.55234 | 33.82 | 56.00 | 22.18 | L1 | gnd |
| 0.75546 | 41.52 | 56.00 | 14.48 | L1 | gnd |
| 0.83359 | 37.00 | 56.00 | 19.00 | L1 | gnd |
| 0.98593 | 41.24 | 56.00 | 14.76 | L1 | gnd |
| 1.10312 | 34.08 | 56.00 | 21.92 | L1 | gnd |
| 1.50937 | 35.42 | 56.00 | 20.58 | L1 | gnd |

| Frequency MHz | AV Level dBµV | AV Limit dBµV | AV Delta dB | Phase - | PE - |
|---------------|---------------|---------------|-------------|---------|------|
| 0.55234 | 24.04 | 46.00 | 21.96 | L1 | gnd |
| 0.75546 | 25.22 | 46.00 | 20.78 | L1 | gnd |
| 0.83359 | 25.99 | 46.00 | 20.01 | L1 | gnd |
| 0.98593 | 30.14 | 46.00 | 15.86 | L1 | gnd |
| 1.10312 | 21.90 | 46.00 | 24.10 | L1 | gnd |
| 1.50937 | 23.38 | 46.00 | 22.62 | L1 | gnd |

L Line

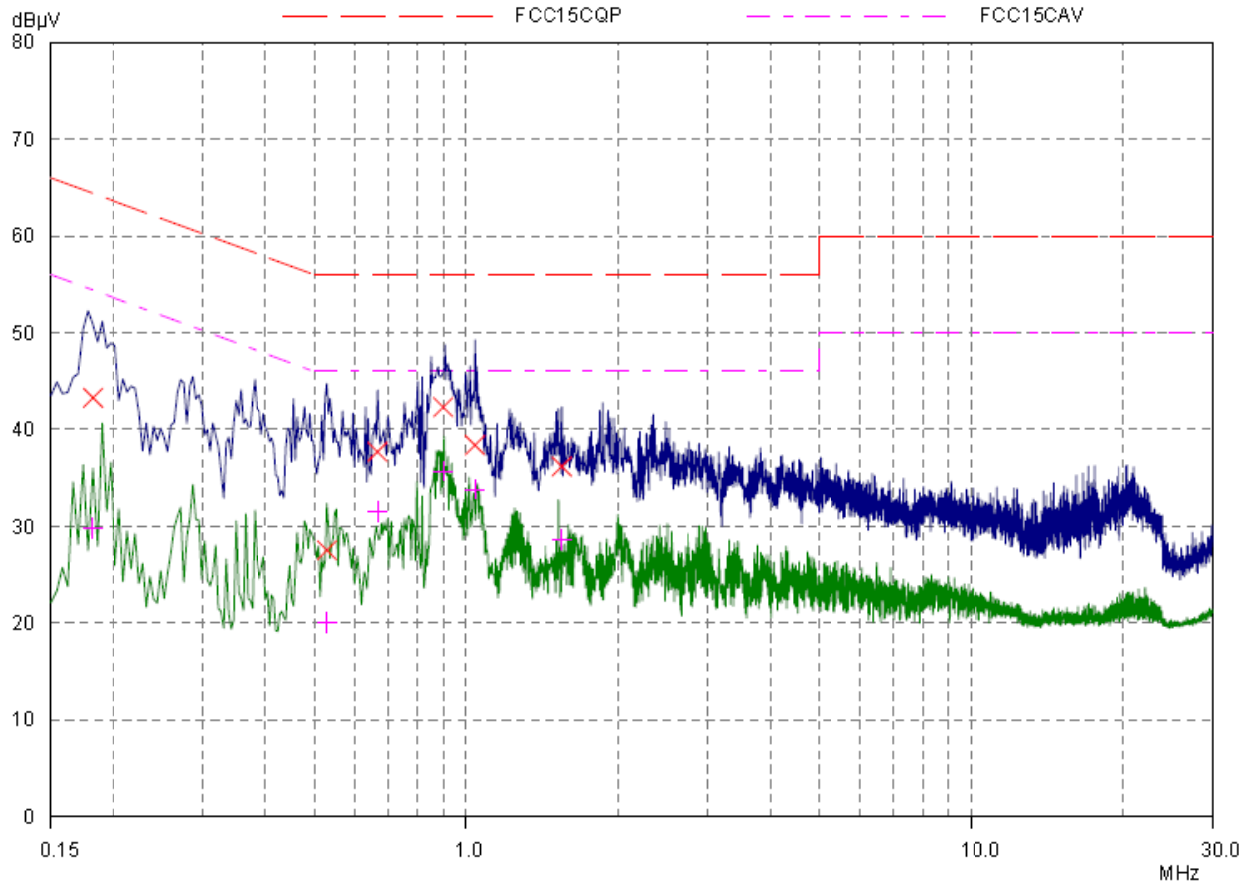

Final Measurement Results

| Frequency MHz | QP Level dBµV | QP Limit dBµV | QP Delta dB | Phase - | PE - |
|---------------|---------------|---------------|-------------|---------|------|
| 0.18125 | 43.30 | 64.43 | 21.13 | N | gnd |
| 0.5289 | 27.54 | 56.00 | 28.46 | N | gnd |
| 0.66562 | 37.70 | 56.00 | 18.30 | N | gnd |
| 0.9 | 42.32 | 56.00 | 13.68 | N | gnd |
| 1.04062 | 38.38 | 56.00 | 17.62 | N | gnd |
| 1.54843 | 36.18 | 56.00 | 19.82 | N | gnd |


| Frequency MHz | AV Level dBµV | AV Limit dBµV | AV Delta dB | Phase - | PE - |
|---------------|---------------|---------------|-------------|---------|------|
| 0.18125 | 29.80 | 54.43 | 24.63 | N | gnd |
| 0.5289 | 20.11 | 46.00 | 25.89 | N | gnd |
| 0.66562 | 31.53 | 46.00 | 14.47 | N | gnd |
| 0.9 | 35.69 | 46.00 | 10.31 | N | gnd |
| 1.04062 | 33.83 | 46.00 | 12.17 | N | gnd |
| 1.54843 | 28.64 | 46.00 | 17.36 | N | gnd |

N Line

Conducted Emission from 150 KHz to 30 MHz



Basic Rate-CH39

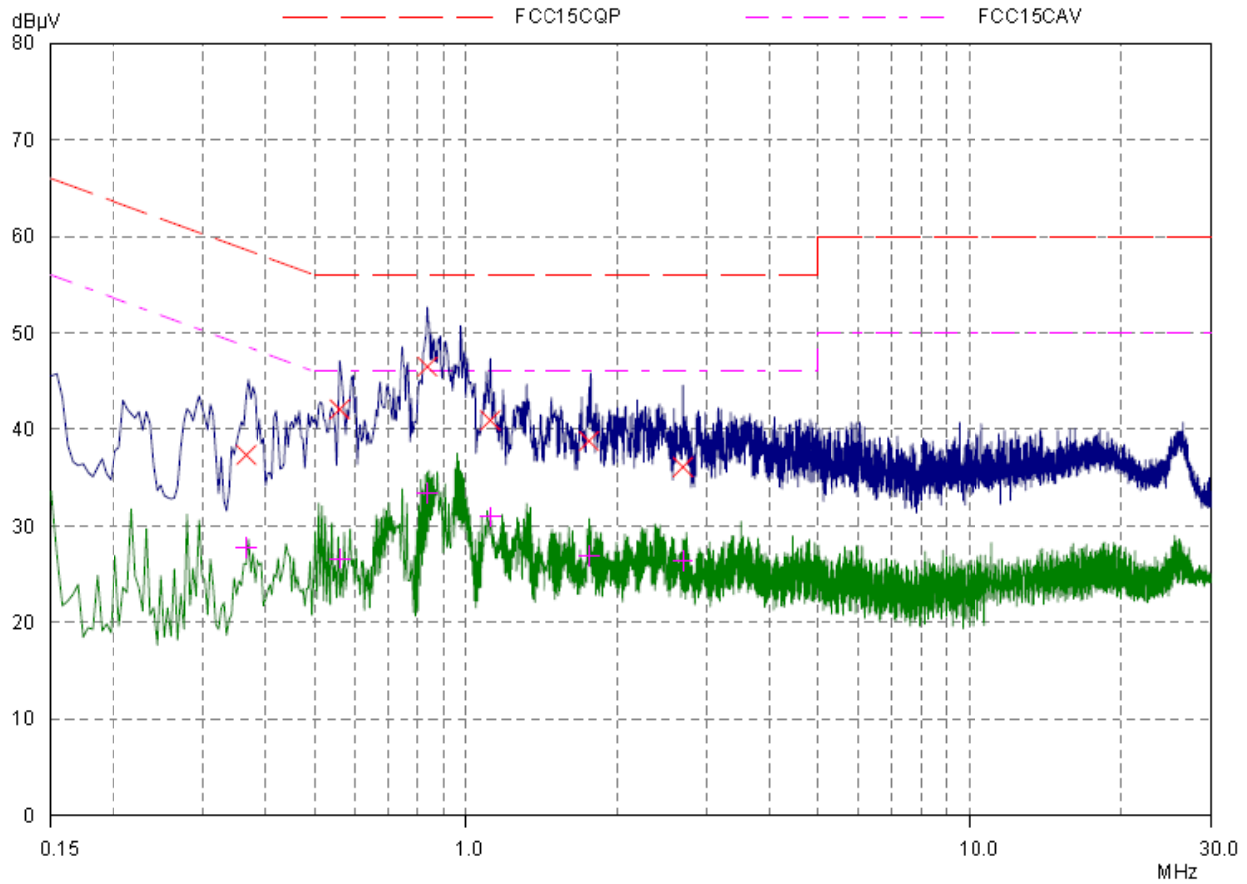


Final Measurement Results

| Frequency MHz | QP Level dBµV | QP Limit dBµV | QP Delta dB | Phase - | PE - |
|------------------|------------------|------------------|----------------|------------|---------|
| 0.36484 | 37.36 | 58.62 | 21.26 | L1 | gnd |
| 0.56015 | 42.08 | 56.00 | 13.92 | L1 | gnd |
| 0.8375 | 46.50 | 56.00 | 9.50 | L1 | gnd |
| 1.11484 | 40.96 | 56.00 | 15.04 | L1 | gnd |
| 1.75546 | 38.80 | 56.00 | 17.20 | L1 | gnd |
| 2.69296 | 36.10 | 56.00 | 19.90 | L1 | gnd |

| Frequency MHz | AV Level dBµV | AV Limit dBµV | AV Delta dB | Phase - | PE - |
|------------------|------------------|------------------|----------------|------------|---------|
| 0.36484 | 27.75 | 48.62 | 20.87 | L1 | gnd |
| 0.56015 | 26.64 | 46.00 | 19.36 | L1 | gnd |
| 0.8375 | 33.38 | 46.00 | 12.62 | L1 | gnd |
| 1.11484 | 30.94 | 46.00 | 15.06 | L1 | gnd |
| 1.75546 | 26.89 | 46.00 | 19.11 | L1 | gnd |
| 2.69296 | 26.39 | 46.00 | 19.61 | L1 | gnd |

L Line

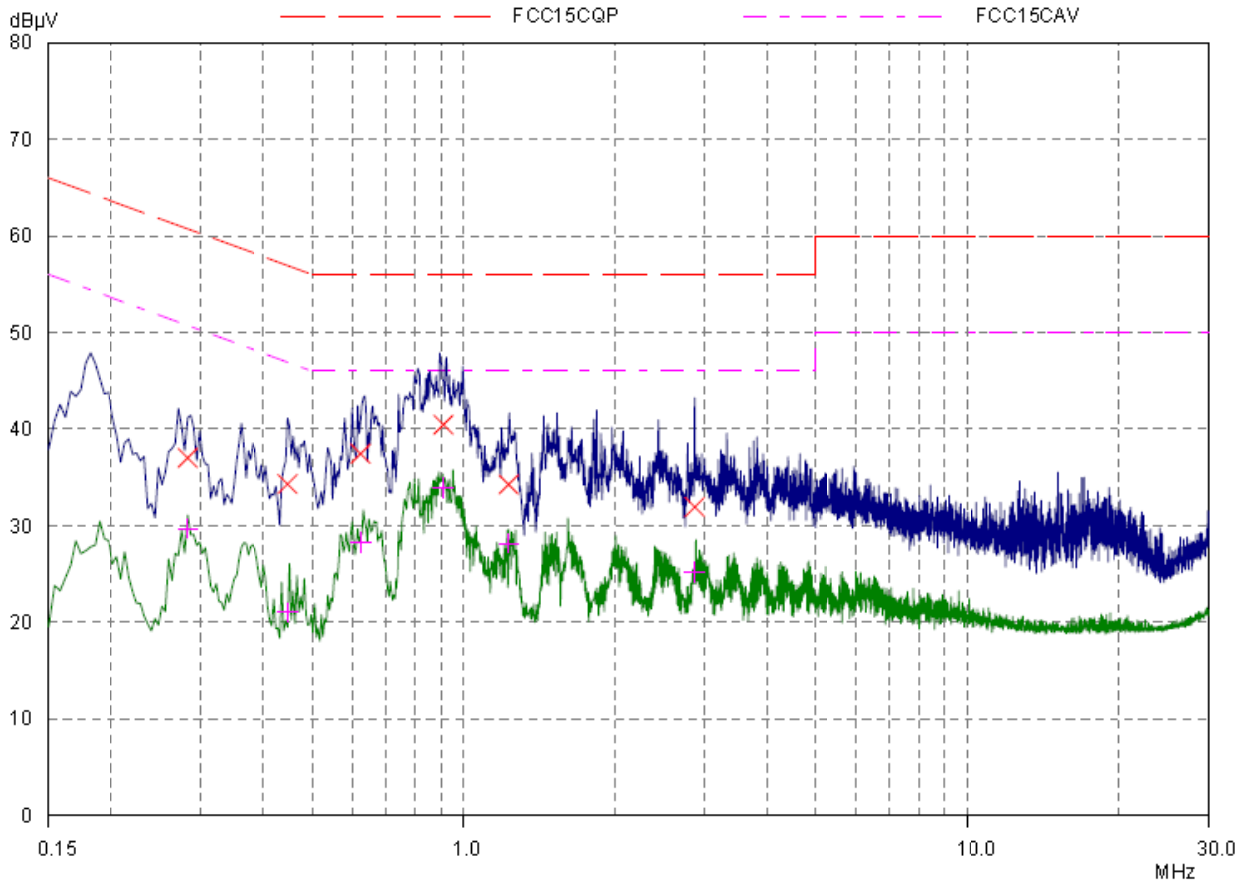

Final Measurement Results

| Frequency MHz | QP Level dBµV | QP Limit dBµV | QP Delta dB | Phase - | PE - |
|------------------|------------------|------------------|----------------|------------|---------|
| 0.28281 | 37.02 | 60.73 | 23.71 | N | gnd |
| 0.44687 | 34.32 | 56.93 | 22.61 | N | gnd |
| 0.62265 | 37.44 | 56.00 | 18.56 | N | gnd |
| 0.91171 | 40.46 | 56.00 | 15.54 | N | gnd |
| 1.22421 | 34.26 | 56.00 | 21.74 | N | gnd |
| 2.87265 | 31.94 | 56.00 | 24.06 | N | gnd |


| Frequency MHz | AV Level dBµV | AV Limit dBµV | AV Delta dB | Phase - | PE - |
|------------------|------------------|------------------|----------------|------------|---------|
| 0.28281 | 29.71 | 50.73 | 21.02 | N | gnd |
| 0.44687 | 21.05 | 46.93 | 25.88 | N | gnd |
| 0.62265 | 28.29 | 46.00 | 17.71 | N | gnd |
| 0.91171 | 33.94 | 46.00 | 12.06 | N | gnd |
| 1.22421 | 28.18 | 46.00 | 17.82 | N | gnd |
| 2.87265 | 25.22 | 46.00 | 20.78 | N | gnd |

N Line

Conducted Emission from 150 KHz to 30 MHz



Basic Rate-CH78

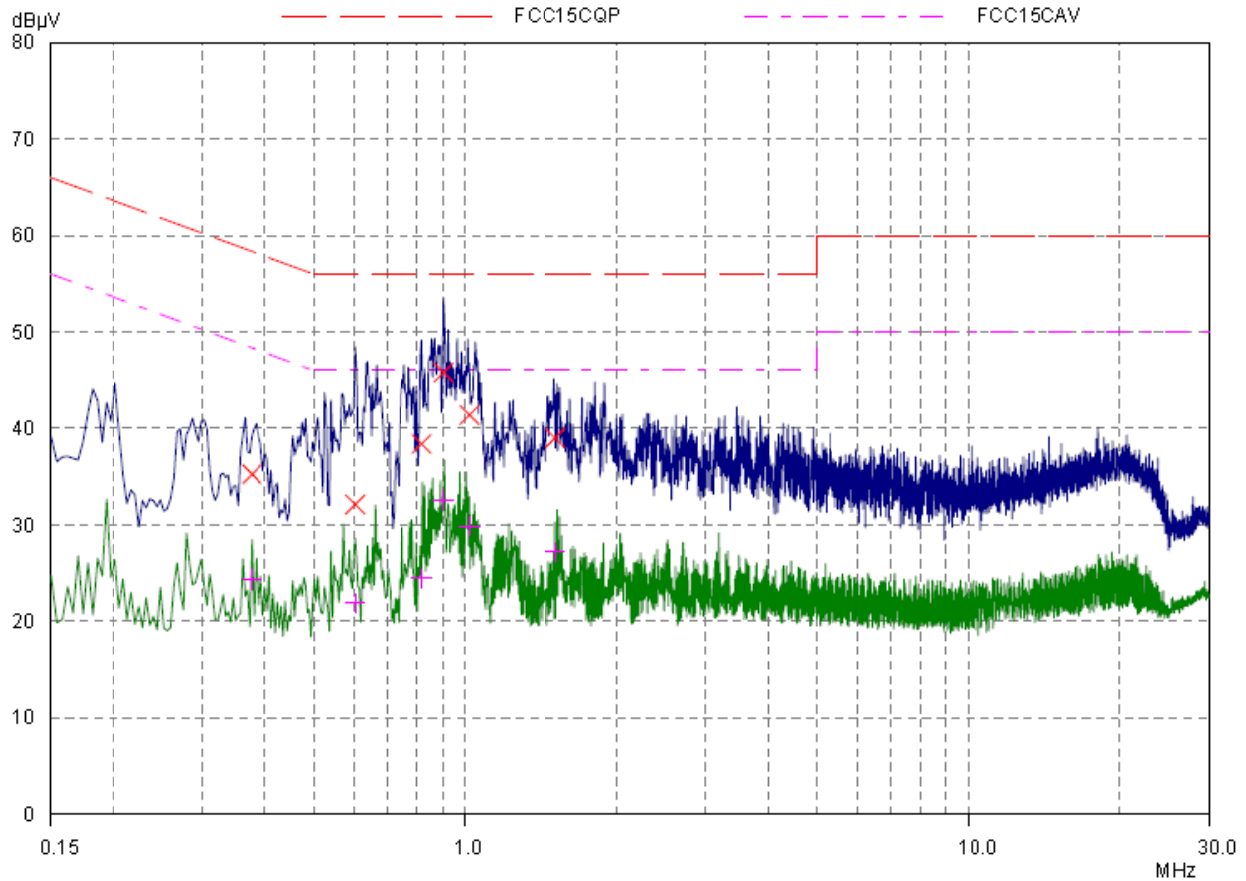


Final Measurement Results

| Frequency MHz | QP Level dBµV | QP Limit dBµV | QP Delta dB | Phase - | PE - |
|------------------|------------------|------------------|----------------|------------|---------|
| 0.37656 | 35.26 | 58.35 | 23.09 | L1 | gnd |
| 0.60312 | 32.12 | 56.00 | 23.88 | L1 | gnd |
| 0.81796 | 38.40 | 56.00 | 17.60 | L1 | gnd |
| 0.9039 | 45.80 | 56.00 | 10.20 | L1 | gnd |
| 1.01718 | 41.40 | 56.00 | 14.60 | L1 | gnd |
| 1.50546 | 39.00 | 56.00 | 17.00 | L1 | gnd |

| Frequency MHz | AV Level dBµV | AV Limit dBµV | AV Delta dB | Phase - | PE - |
|------------------|------------------|------------------|----------------|------------|---------|
| 0.37656 | 24.37 | 48.35 | 23.98 | L1 | gnd |
| 0.60312 | 21.90 | 46.00 | 24.10 | L1 | gnd |
| 0.81796 | 24.45 | 46.00 | 21.55 | L1 | gnd |
| 0.9039 | 32.53 | 46.00 | 13.47 | L1 | gnd |
| 1.01718 | 29.89 | 46.00 | 16.11 | L1 | gnd |
| 1.50546 | 27.19 | 46.00 | 18.81 | L1 | gnd |

L Line

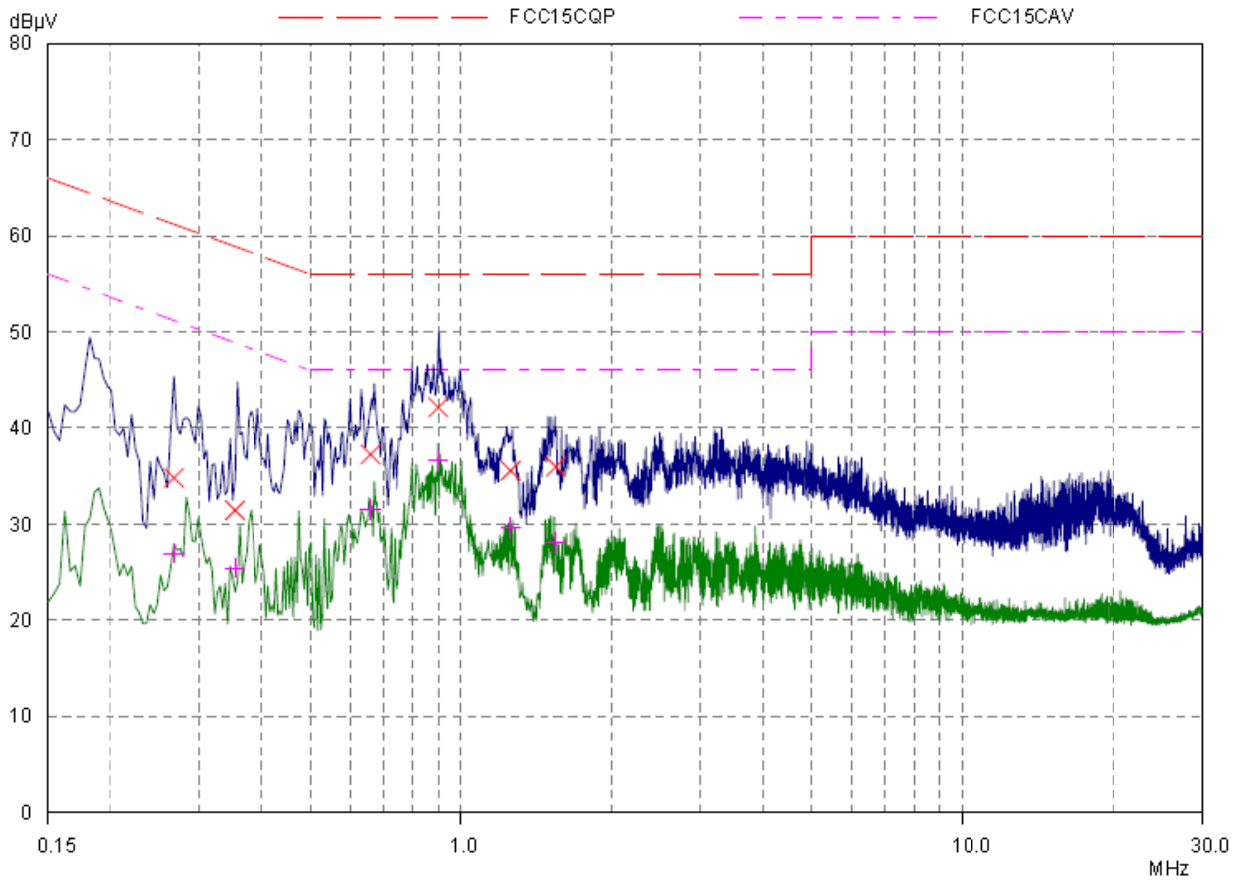

Final Measurement Results


| Frequency MHz | QP Level dBµV | QP Limit dBµV | QP Delta dB | Phase - | PE - |
|------------------|------------------|------------------|----------------|------------|---------|
| 0.26718 | 34.82 | 61.21 | 26.39 | N | gnd |
| 0.35312 | 31.44 | 58.89 | 27.45 | N | gnd |
| 0.65781 | 37.24 | 56.00 | 18.76 | N | gnd |
| 0.9 | 42.14 | 56.00 | 13.86 | N | gnd |
| 1.25156 | 35.56 | 56.00 | 20.44 | N | gnd |
| 1.54843 | 35.96 | 56.00 | 20.04 | N | gnd |

| Frequency MHz | AV Level dBµV | AV Limit dBµV | AV Delta dB | Phase - | PE - |
|------------------|------------------|------------------|----------------|------------|---------|
| 0.26718 | 26.95 | 51.21 | 24.26 | N | gnd |
| 0.35312 | 25.44 | 48.89 | 23.45 | N | gnd |
| 0.65781 | 31.53 | 46.00 | 14.47 | N | gnd |
| 0.9 | 36.65 | 46.00 | 9.35 | N | gnd |
| 1.25156 | 29.67 | 46.00 | 16.33 | N | gnd |
| 1.54843 | 28.13 | 46.00 | 17.87 | N | gnd |

N Line

Conducted Emission from 150 KHz to 30 MHz

EDR-CH0

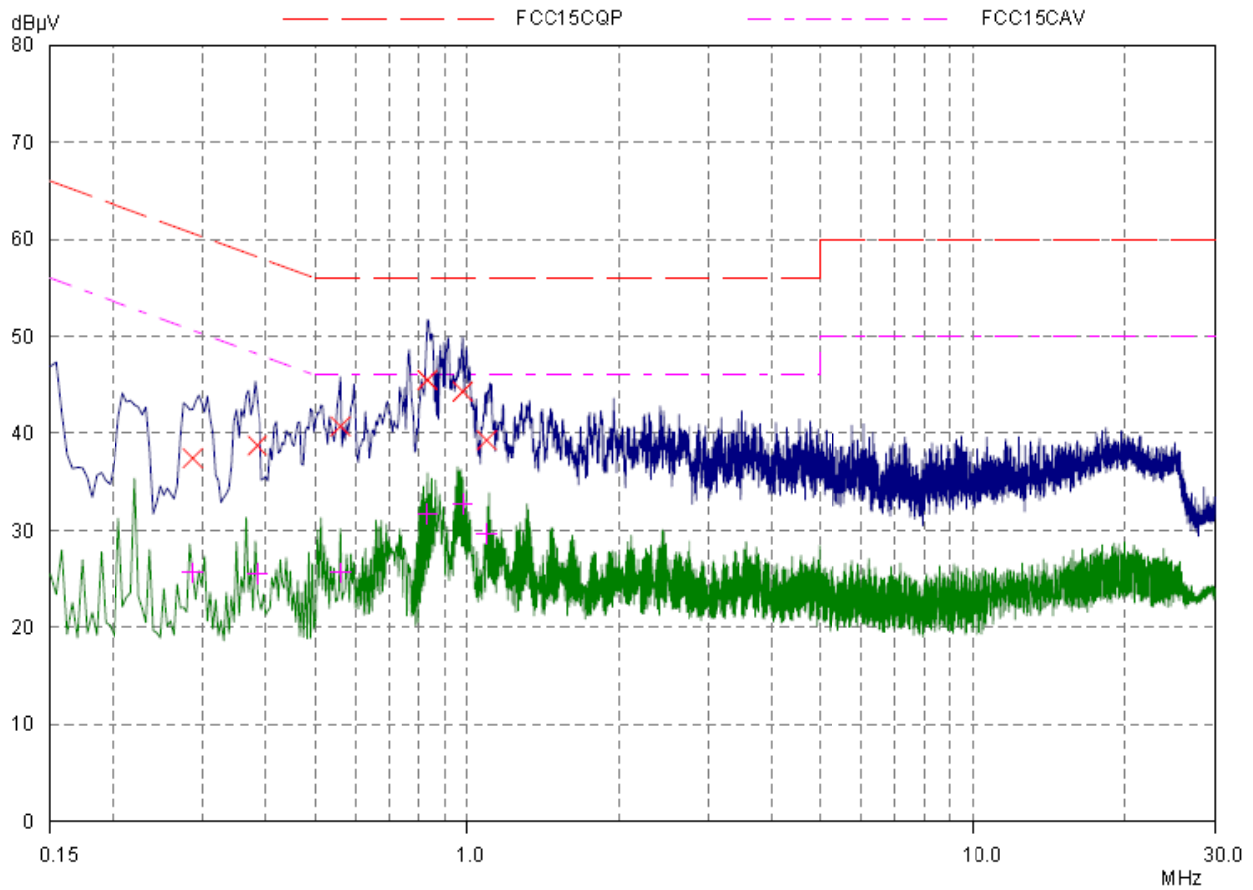


Final Measurement Results

| Frequency MHz | QP Level dBµV | QP Limit dBµV | QP Delta dB | Phase | PE |
|---------------|---------------|---------------|-------------|-------|-----|
| 0.28671 | 37.44 | 60.62 | 23.18 | L1 | gnd |
| 0.38437 | 38.76 | 58.18 | 19.42 | L1 | gnd |
| 0.56015 | 40.72 | 56.00 | 15.28 | L1 | gnd |
| 0.83359 | 45.50 | 56.00 | 10.50 | L1 | gnd |
| 0.97812 | 44.32 | 56.00 | 11.68 | L1 | gnd |
| 1.0914 | 39.30 | 56.00 | 16.70 | L1 | gnd |

| Frequency MHz | AV Level dBµV | AV Limit dBµV | AV Delta dB | Phase | PE |
|---------------|---------------|---------------|-------------|-------|-----|
| 0.28671 | 25.65 | 50.62 | 24.97 | L1 | gnd |
| 0.38437 | 25.58 | 48.18 | 22.60 | L1 | gnd |
| 0.56015 | 25.65 | 46.00 | 20.35 | L1 | gnd |
| 0.83359 | 31.67 | 46.00 | 14.33 | L1 | gnd |
| 0.97812 | 32.72 | 46.00 | 13.28 | L1 | gnd |
| 1.0914 | 29.67 | 46.00 | 16.33 | L1 | gnd |

L Line

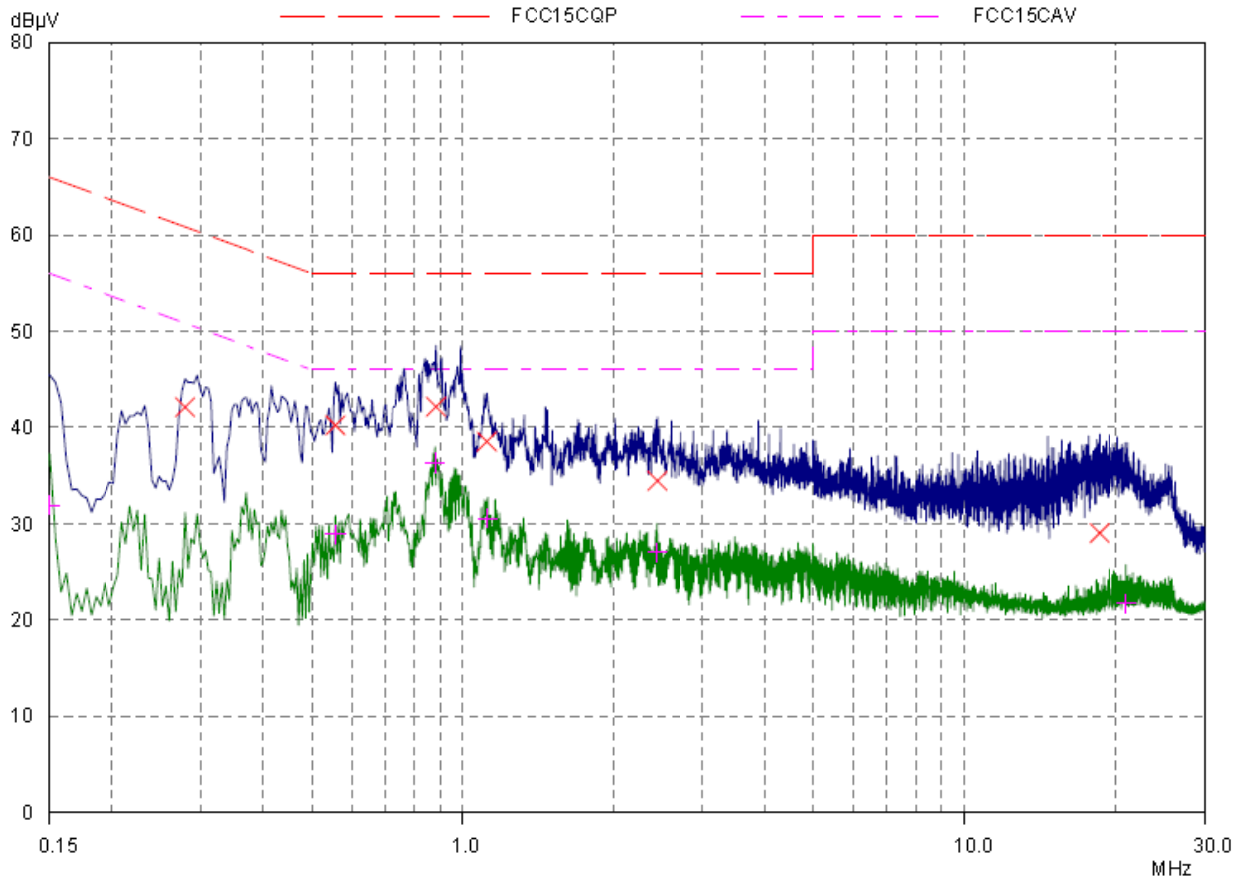

Final Measurement Results

| Frequency MHz | QP Level dBµV | QP Limit dBµV | QP Delta dB | Phase - | PE - |
|------------------|------------------|------------------|----------------|------------|---------|
| 0.2789 | 42.12 | 60.85 | 18.73 | L1 | gnd |
| 0.55625 | 40.24 | 56.00 | 15.76 | L1 | gnd |
| 0.88437 | 42.16 | 56.00 | 13.84 | L1 | gnd |
| 1.11484 | 38.54 | 56.00 | 17.46 | L1 | gnd |
| 2.43906 | 34.46 | 56.00 | 21.54 | L1 | gnd |
| 18.54062 | 29.04 | 60.00 | 30.96 | L1 | gnd |


| Frequency MHz | AV Level dBµV | AV Limit dBµV | AV Delta dB | Phase - | PE - |
|------------------|------------------|------------------|----------------|------------|---------|
| 0.15 | 31.94 | 56.00 | 24.06 | L1 | gnd |
| 0.55625 | 28.89 | 46.00 | 17.11 | L1 | gnd |
| 0.88046 | 36.33 | 46.00 | 9.67 | L1 | gnd |
| 1.11875 | 30.55 | 46.00 | 15.45 | L1 | gnd |
| 2.43515 | 27.01 | 46.00 | 18.99 | L1 | gnd |
| 20.97812 | 21.72 | 50.00 | 28.28 | L1 | gnd |

N Line

Conducted Emission from 150 KHz to 30 MHz



EDR-CH39

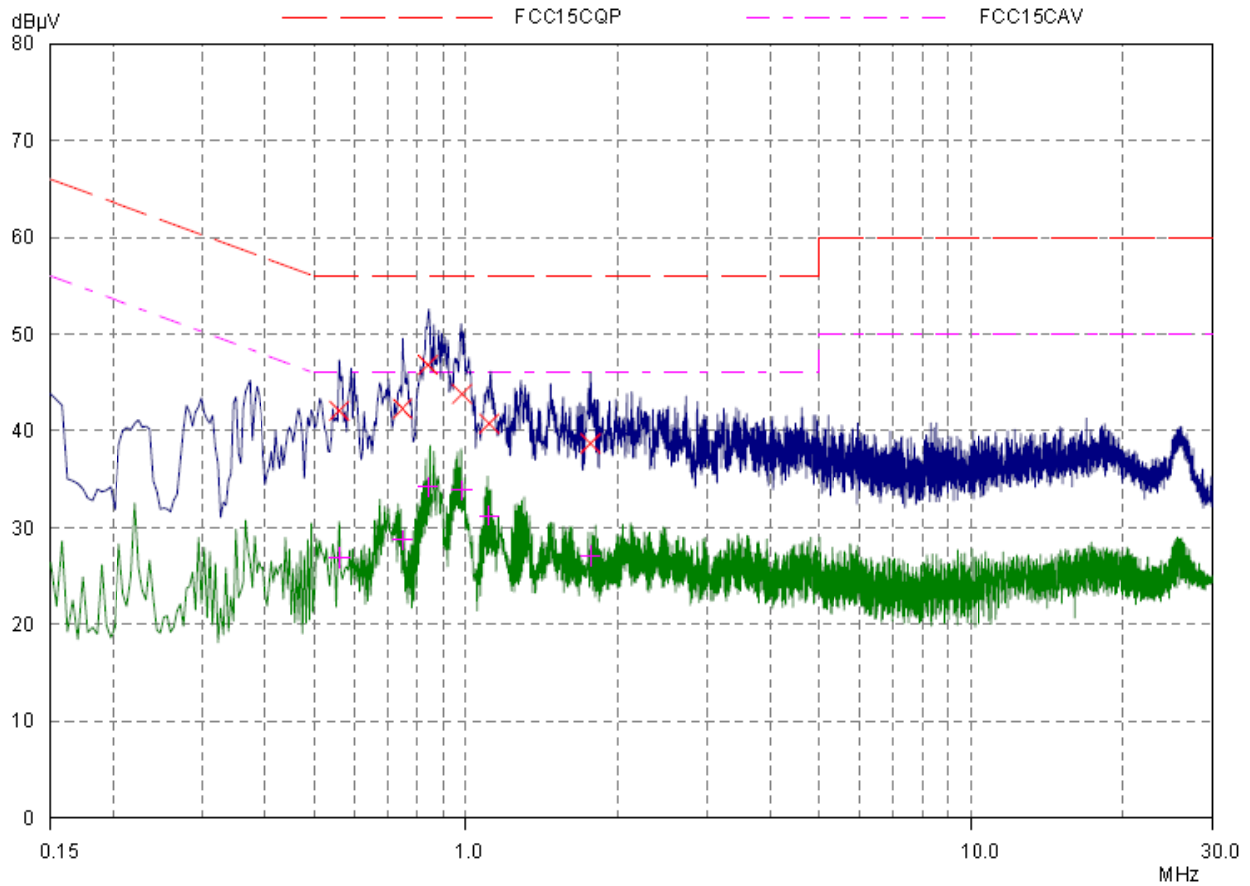


Final Measurement Results

| Frequency MHz | QP Level dBµV | QP Limit dBµV | QP Delta dB | Phase - | PE - |
|---------------|---------------|---------------|-------------|---------|------|
| 0.56015 | 42.08 | 56.00 | 13.92 | L1 | gnd |
| 0.74765 | 42.30 | 56.00 | 13.70 | L1 | gnd |
| 0.8414 | 46.82 | 56.00 | 9.18 | L1 | gnd |
| 0.98203 | 43.82 | 56.00 | 12.18 | L1 | gnd |
| 1.11093 | 40.76 | 56.00 | 15.24 | L1 | gnd |
| 1.76328 | 38.70 | 56.00 | 17.30 | L1 | gnd |

| Frequency MHz | AV Level dBµV | AV Limit dBµV | AV Delta dB | Phase - | PE - |
|---------------|---------------|---------------|-------------|---------|------|
| 0.56015 | 26.89 | 46.00 | 19.11 | L1 | gnd |
| 0.74765 | 28.74 | 46.00 | 17.26 | L1 | gnd |
| 0.8414 | 34.20 | 46.00 | 11.80 | L1 | gnd |
| 0.98203 | 33.88 | 46.00 | 12.12 | L1 | gnd |
| 1.11093 | 31.24 | 46.00 | 14.76 | L1 | gnd |
| 1.76328 | 27.07 | 46.00 | 18.93 | L1 | gnd |

L Line

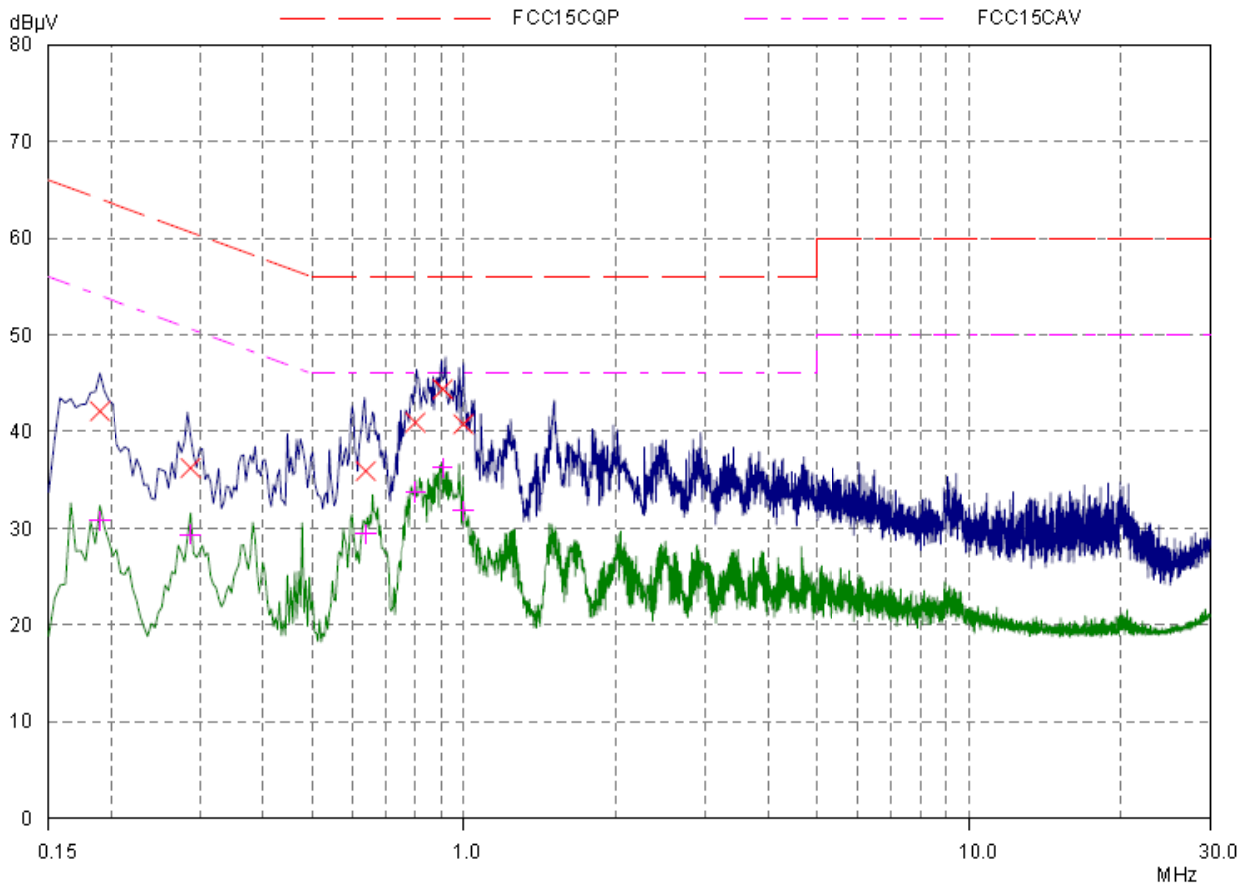

Final Measurement Results

| Frequency MHz | QP Level dBµV | QP Limit dBµV | QP Delta dB | Phase - | PE - |
|---------------|---------------|---------------|-------------|---------|------|
| 0.18906 | 42.10 | 64.08 | 21.98 | N | gnd |
| 0.28671 | 36.22 | 60.62 | 24.40 | N | gnd |
| 0.63828 | 35.92 | 56.00 | 20.08 | N | gnd |
| 0.80234 | 40.94 | 56.00 | 15.06 | N | gnd |
| 0.90781 | 44.40 | 56.00 | 11.60 | N | gnd |
| 0.99765 | 40.76 | 56.00 | 15.24 | N | gnd |


| Frequency MHz | AV Level dBµV | AV Limit dBµV | AV Delta dB | Phase - | PE - |
|---------------|---------------|---------------|-------------|---------|------|
| 0.18906 | 30.78 | 54.08 | 23.30 | N | gnd |
| 0.28671 | 29.36 | 50.62 | 21.26 | N | gnd |
| 0.63828 | 29.40 | 46.00 | 16.60 | N | gnd |
| 0.80234 | 33.77 | 46.00 | 12.23 | N | gnd |
| 0.90781 | 36.24 | 46.00 | 9.76 | N | gnd |
| 0.99765 | 31.81 | 46.00 | 14.19 | N | gnd |

N Line

Conducted Emission from 150 KHz to 30 MHz



EDR-CH78

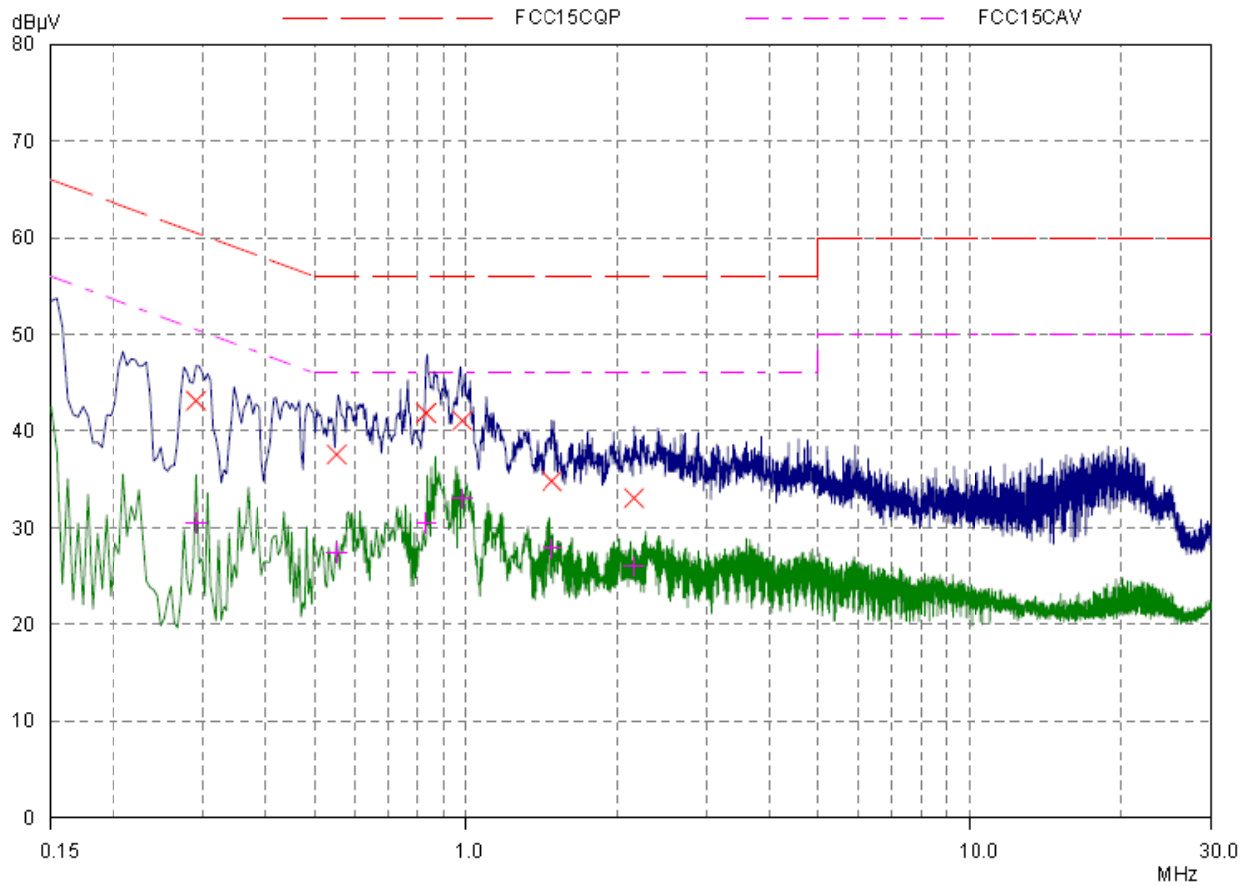


Final Measurement Results

| Frequency MHz | QP Level dBµV | QP Limit dBµV | QP Delta dB | Phase - | PE - |
|---------------|---------------|---------------|-------------|---------|------|
| 0.29062 | 43.14 | 60.51 | 17.37 | L1 | gnd |
| 0.55234 | 37.58 | 56.00 | 18.42 | L1 | gnd |
| 0.83359 | 41.86 | 56.00 | 14.14 | L1 | gnd |
| 0.98203 | 41.06 | 56.00 | 14.94 | L1 | gnd |
| 1.47812 | 34.82 | 56.00 | 21.18 | L1 | gnd |
| 2.1539 | 33.06 | 56.00 | 22.94 | L1 | gnd |

| Frequency MHz | AV Level dBµV | AV Limit dBµV | AV Delta dB | Phase - | PE - |
|---------------|---------------|---------------|-------------|---------|------|
| 0.29062 | 30.47 | 50.51 | 20.04 | L1 | gnd |
| 0.55234 | 27.47 | 46.00 | 18.53 | L1 | gnd |
| 0.83359 | 30.47 | 46.00 | 15.53 | L1 | gnd |
| 0.98203 | 33.03 | 46.00 | 12.97 | L1 | gnd |
| 1.47812 | 27.86 | 46.00 | 18.14 | L1 | gnd |
| 2.1539 | 25.99 | 46.00 | 20.01 | L1 | gnd |

L Line

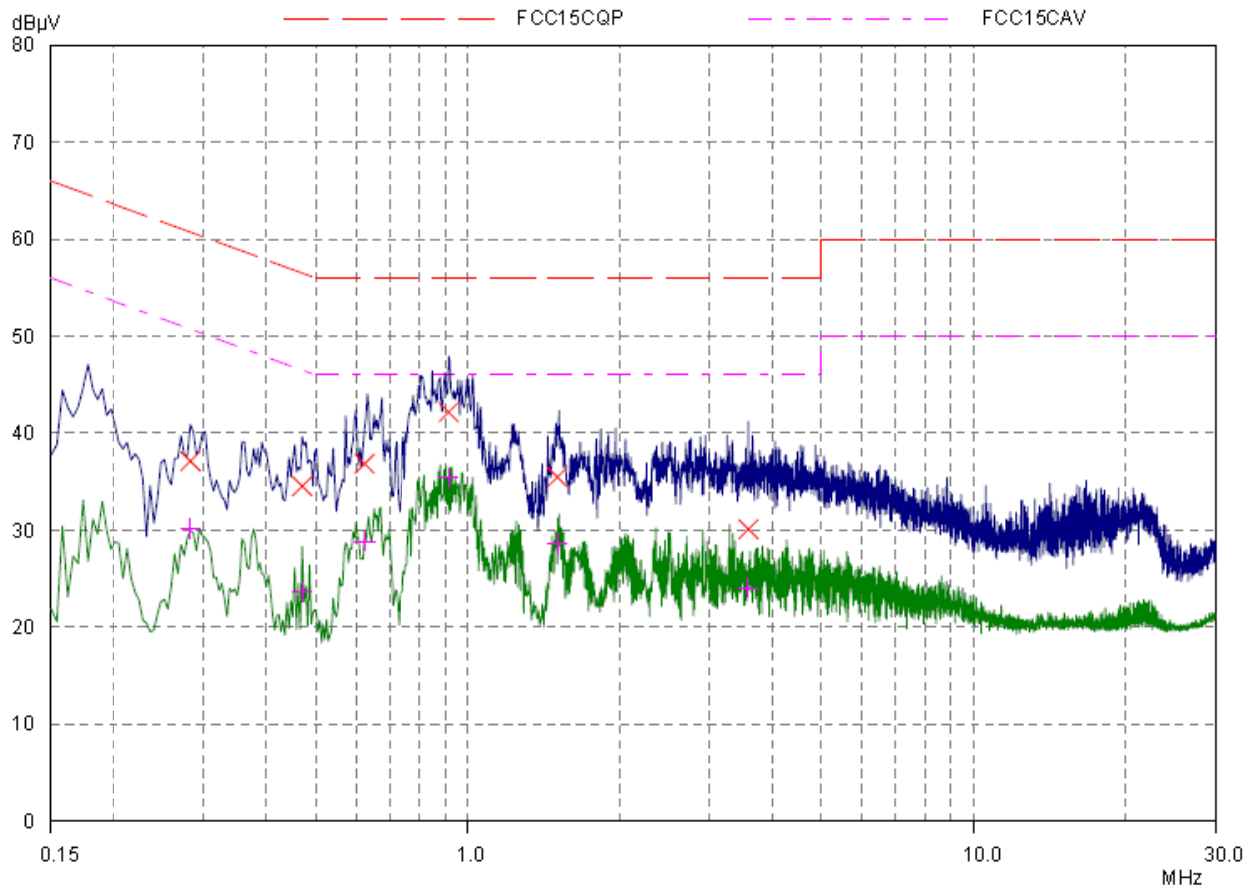

Final Measurement Results

| Frequency MHz | QP Level dBµV | QP Limit dBµV | QP Delta dB | Phase | PE |
|------------------|------------------|------------------|----------------|-------|-----|
| 0.28281 | 37.12 | 60.73 | 23.61 | N | gnd |
| 0.47031 | 34.54 | 56.51 | 21.97 | N | gnd |
| 0.62265 | 36.84 | 56.00 | 19.16 | N | gnd |
| 0.91562 | 42.16 | 56.00 | 13.84 | N | gnd |
| 1.50546 | 35.48 | 56.00 | 20.52 | N | gnd |
| 3.58359 | 30.10 | 56.00 | 25.90 | N | gnd |

| Frequency MHz | AV Level dBµV | AV Limit dBµV | AV Delta dB | Phase | PE |
|------------------|------------------|------------------|----------------|-------|-----|
| 0.28281 | 30.14 | 50.73 | 20.59 | N | gnd |
| 0.47031 | 23.61 | 46.51 | 22.90 | N | gnd |
| 0.62265 | 28.84 | 46.00 | 17.16 | N | gnd |
| 0.91562 | 35.38 | 46.00 | 10.62 | N | gnd |
| 1.50546 | 28.64 | 46.00 | 17.36 | N | gnd |
| 3.58359 | 24.04 | 46.00 | 21.96 | N | gnd |

N Line

Conducted Emission from 150 KHz to 30 MHz

5 Main Test Instruments

| Name | Type | Manufacturer | Serial Number | Calibration Date | Expiration Time |
|--------------------------------------|--------------|--------------|---------------|------------------|-----------------|
| BT Base Station Simulator | CBT | R&S | 100271 | 2015-05-25 | 2016-05-24 |
| Loop Antenna | FMZB1519 | SCHWARZBECK | 1519-047 | 2014-02-29 | 2017-02-28 |
| EMI Test Receiver | ESCS30 | R&S | 100138 | 2014-12-17 | 2015-12-16 |
| LISN | ENV216 | R&S | 101171 | 2014-12-17 | 2015-12-16 |
| EMI Test Receiver | ESCI | R&S | 100948 | 2015-05-25 | 2016-05-24 |
| TRILOG Broadband Antenna | VULB 9163 | Schwarzbeck | 9163-201 | 2013-11-25 | 2016-11-24 |
| Double Ridged Waveguide Horn Antenna | HF907 | R&S | 100126 | 2015-07-01 | 2018-06-30 |
| Power Splitter | SHX-GF2-2-13 | Hua Xiang | 10120101 | NA | NA |
| Spectrum Analyzer | FSV30 | R&S | 100815 | 2014-12-17 | 2015-12-16 |
| Spectrum Analyzer | N9010A | Agilent | MY47191109 | 2015-05-22 | 2016-05-21 |
| Standard Gain Horn | 3160-09 | ETS-Lindgren | 00102644 | 2015-05-19 | 2018-05-18 |
| RF Cable | SMA 15cm | Agilent | 0001 | 2015-11-09 | 2016-01-08 |

*****END OF REPORT *****

ANNEX A: EUT Appearance and Test Setup

A.1 EUT Appearance



Front Side



Back Side

a: EUT



b: Battery
Picture 1 EUT

A.2 Test Setup



Below 1GHz



Above 1GHz

Picture 2 Radiated Emission Test Setup



Picture 3 Conducted Emission Test Setup