



# RF TEST REPORT

|                   |                                |
|-------------------|--------------------------------|
| <b>Applicant</b>  | TP-LINK TECHNOLOGIES CO., LTD. |
| <b>FCC ID</b>     | TE7C5V1                        |
| <b>Brand</b>      | TP-LINK                        |
| <b>Product</b>    | C5 FDD-LTE Smartphone          |
| <b>Model</b>      | TP701C                         |
| <b>Report No.</b> | RXA1601-0001RF05R1             |
| <b>Issue Date</b> | June 1, 2016                   |

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15C (2015)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Handwritten signature of Lingling Kang in black ink.

*Reviewed by: Lingling Kang/ Manager*

Handwritten signature of Kai Xu in black ink.

*Approved by: Kai Xu/ Director*



## TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

## Table of Contents

|          |                                                         |     |
|----------|---------------------------------------------------------|-----|
| 1        | Test Laboratory .....                                   | 4   |
| 1.1.     | Notes of the Test Report.....                           | 4   |
| 1.2.     | Test facility .....                                     | 4   |
| 1.3.     | Testing Location.....                                   | 5   |
| 2        | General Description of Equipment under Test .....       | 6   |
| 3        | Applied Standards .....                                 | 7   |
| 4        | Test Configuration .....                                | 8   |
| 5        | Test Case Results .....                                 | 9   |
| 5.1.     | Peak Power Output –Conducted .....                      | 9   |
| 5.2.     | Occupied Bandwidth (6dB) .....                          | 12  |
| 5.3.     | Band Edge Compliance .....                              | 22  |
| 5.4.     | Spurious Radiated Emissions in the restricted band..... | 28  |
| 5.5.     | Power Spectral Density .....                            | 40  |
| 5.6.     | Spurious RF Conducted Emissions.....                    | 50  |
| 5.7.     | Radiates Emission .....                                 | 67  |
| 5.8.     | Conducted Emissions .....                               | 130 |
| 6        | Main Test Instruments .....                             | 161 |
| ANNEX A: | EUT Appearance and Test Setup .....                     | 162 |
| A.1      | EUT Appearance .....                                    | 162 |
| A.2      | Test Setup.....                                         | 164 |

### Summary of measurement results

| No.                                                | Test Type                                          | Clause in FCC rules     | Verdict |
|----------------------------------------------------|----------------------------------------------------|-------------------------|---------|
| 1                                                  | Peak Power Output –Conducted                       | 15.247(b)(3)            | PASS    |
| 2                                                  | Minimum 6dB bandwidth                              | 15.247(a)(2)            | PASS    |
| 3                                                  | Band Edges compliance                              | 15.247(d)               | PASS    |
| 4                                                  | Power spectral Density                             | 15.247(e)               | PASS    |
| 5                                                  | Conducted Spurious Emission                        | 15.247                  | PASS    |
| 6                                                  | Spurious Radiated Emissions in the restricted band | 15.247(d),15.205,15.209 | PASS    |
| 7                                                  | Radiated Emissions                                 | 15.247(d),15.205,15.209 | PASS    |
| 8                                                  | Conducted Emissions                                | 15.207,15.107           | PASS    |
| Date of Testing: January 4, 2016~ January 13, 2016 |                                                    |                         |         |

# 1 Test Laboratory

## 1.1. Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd**. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above. This report must not be used by the client to claim product certification, approval, or endorsement by CNAS or any government agencies.

## 1.2. Test facility

### **CNAS (accreditation number: L2264)**

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

### **FCC (recognition number is 428261)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

### **IC (recognition number is 8510A)**

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

### **VCCI (recognition number is C-4595, T-2154, R-4113, G-766)**

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

### **A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

### 1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.  
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Xu Kai  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [xukai@ta-shanghai.com](mailto:xukai@ta-shanghai.com)

## 2 General Description of Equipment under Test

### Client Information

|                             |                                                                                                                         |
|-----------------------------|-------------------------------------------------------------------------------------------------------------------------|
| <b>Applicant</b>            | TP-LINK TECHNOLOGIES CO., LTD.                                                                                          |
| <b>Applicant address</b>    | Building 24 (floors 1,3,4,5) and 28 (floors1-4) Central Science and Technology Park,Shennan Rd, Nanshan, Shenzhen,China |
| <b>Manufacturer</b>         | TP-LINK TECHNOLOGIES CO., LTD.                                                                                          |
| <b>Manufacturer address</b> | Building 24 (floors 1,3,4,5) and 28 (floors1-4) Central Science and Technology Park,Shennan Rd, Nanshan, Shenzhen,China |

### General information

|                                                                                                                                     |                                                                                                           |
|-------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|
| Model:                                                                                                                              | TP701C                                                                                                    |
| IMEI:                                                                                                                               | SIM 1: 868983020009872<br>SIM 2: 868983020011233                                                          |
| Hardware Version:                                                                                                                   | AL815_MB_PCB_V2.0                                                                                         |
| Software Version:                                                                                                                   | H10S100D03B20151124R1001                                                                                  |
| Power Supply:                                                                                                                       | Battery/AC adapter                                                                                        |
| Antenna Type:                                                                                                                       | Internal Antenna                                                                                          |
| Network Standards:                                                                                                                  | Bluetooth(Low Energy)<br>802.11b<br>802.11g, 802.11n(HT20/HT40);                                          |
| Modulation:                                                                                                                         | BLE :GFSK<br>802.11b DSSS;<br>802.11g/n(HT20/HT40) OFDM                                                   |
| Max Conducted Power:                                                                                                                | BLE :-0.206 dBm<br>Wi-Fi : 18.62 dBm                                                                      |
| Tested Frequency Range(s):                                                                                                          | 2400MHz~ 2483.5 MHz                                                                                       |
| EUT Accessory                                                                                                                       |                                                                                                           |
| Battery                                                                                                                             | Manufacturer: DongGuan Amperex Technology Co., Ltd<br>Model: NBL-42A2200<br>Power Rating: DC 3.8V, Li-ion |
| Note: The information of the EUT is declared by the manufacturer.<br>Please refer to the specifications or user manual for details. |                                                                                                           |



### **3 Applied Standards**

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC CFR47 Part 15C (2015) Radio Frequency Devices**

**ANSI C63.4 (2014)**

**KDB 558074 D01 DTS Meas Guidance v03r05**

## 4 Test Configuration

### Test Mode

The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate declared in basic standard IEEE802.11. Preliminary tests has been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.

| Band                  | Data Rate |
|-----------------------|-----------|
| Bluetooth(Low Energy) | 1Mbps     |
| 802.11b               | 2 Mbps    |
| 802.11g               | 18 Mbps   |
| 802.11n HT20          | MCS3      |
| 802.11n HT40          | MCS0      |

## 5 Test Case Results

### 5.1. Peak Power Output –Conducted


#### Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~ 25°C | 45% ~ 50%         | 101.5kPa |

#### Methods of Measurement

During the process of the testing, The EUT was connected to the power meter through an external attenuator and a known loss cable. The EUT is max power transmission with proper modulation. We use Maximum Peak Conducted Output Power Level Method in KDB 558074 D01 for this test.

#### Test Setup



#### Limits

Rule Part 15.247 (b) (3) specifies that " For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt."

|                   |                          |
|-------------------|--------------------------|
| Peak Output Power | $\leq 1\text{W}$ (30dBm) |
|-------------------|--------------------------|

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.44$  dB.

**Test Results:**

| Band                                                                                                     | Mode               | Data Rate | Peak Output Power (dBm) |        |         |
|----------------------------------------------------------------------------------------------------------|--------------------|-----------|-------------------------|--------|---------|
|                                                                                                          |                    |           | Channel/Frequency(MHz)  |        |         |
|                                                                                                          |                    |           | 1/2412                  | 6/2437 | 11/2462 |
| 2.4G                                                                                                     | 80.2 11b           | 1M        | 18.07                   | 18.51  | 18.02   |
|                                                                                                          |                    | 2M        | 18.62                   | 18.02  | 18.24   |
|                                                                                                          |                    | 5.5M      | 18.22                   | 17.88  | 18.17   |
|                                                                                                          |                    | 11M       | 18.30                   | 18.04  | 18.27   |
|                                                                                                          | 80.2 11g           | 6M        | 16.30                   | 16.09  | 16.15   |
|                                                                                                          |                    | 9M        | 13.94                   | 13.92  | 14.23   |
|                                                                                                          |                    | 12M       | 16.40                   | 16.31  | 16.26   |
|                                                                                                          |                    | 18M       | 16.78                   | 16.45  | 16.57   |
|                                                                                                          |                    | 24M       | 13.91                   | 14.21  | 14.28   |
|                                                                                                          |                    | 36M       | 13.92                   | 13.87  | 13.96   |
|                                                                                                          |                    | 48M       | 16.04                   | 15.59  | 15.63   |
|                                                                                                          |                    | 54M       | 15.82                   | 15.82  | 15.94   |
|                                                                                                          | 80.2 11n<br>(HT20) | 6.5M      | 15.87                   | 16.02  | 16.03   |
|                                                                                                          |                    | 13M       | 16.03                   | 15.77  | 16.02   |
|                                                                                                          |                    | 19.5M     | 16.06                   | 15.88  | 16.12   |
|                                                                                                          |                    | 26M       | 16.01                   | 15.93  | 15.87   |
|                                                                                                          |                    | 39M       | 16.23                   | 16.14  | 15.76   |
|                                                                                                          |                    | 52M       | 15.38                   | 15.12  | 15.24   |
|                                                                                                          |                    | 58.5M     | 15.40                   | 15.18  | 15.45   |
|                                                                                                          |                    | 65M       | 15.35                   | 15.22  | 15.34   |
|                                                                                                          | Mode               | Data Rate | Channel/Frequency(MHz)  |        |         |
|                                                                                                          |                    |           | 3/2422                  | 6/2437 | 9/2452  |
|                                                                                                          | 80.2 11n<br>(HT40) | 7.2M      | 15.57                   | 15.91  | 15.31   |
|                                                                                                          |                    | 14.4M     | 15.61                   | 15.81  | 15.75   |
|                                                                                                          |                    | 21.6M     | 15.50                   | 15.74  | 15.41   |
|                                                                                                          |                    | 28.8M     | 15.43                   | 15.73  | 15.48   |
|                                                                                                          |                    | 43.3M     | 15.48                   | 15.71  | 15.44   |
|                                                                                                          |                    | 57.7M     | 14.50                   | 14.80  | 14.52   |
|                                                                                                          |                    | 65M       | 15.45                   | 14.36  | 14.62   |
|                                                                                                          |                    | 72.2M     | 14.37                   | 14.28  | 14.28   |
| Note. The Tx power is set to 19 for 802.11 b mode, set to 17 for 802.11 g/ n HT20/HT40 mode by software. |                    |           |                         |        |         |

| Network Standards      | Carrier frequency (MHz) | Peak Output Power (dBm) | Conclusion |
|------------------------|-------------------------|-------------------------|------------|
| Bluetooth (Low Energy) | 2402                    | -0.284                  | PASS       |
|                        | 2440                    | -0.385                  | PASS       |
|                        | 2480                    | -0.206                  | PASS       |

## 5.2. Occupied Bandwidth (6dB)


### Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |

### Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable. RBW is set to 100 kHz; VBW is set to 300 kHz on spectrum analyzer.

### Test Setup



### Limits

Rule Part 15.247 (a) (2) specifies that “Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz. The minimum 6 dB bandwidth shall be at least 500 kHz.”

|                        |           |
|------------------------|-----------|
| minimum 6 dB bandwidth | ≥ 500 kHz |
|------------------------|-----------|

### Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 936$  Hz.

**Test Results:**


| Network Standards         | Carrier frequency (MHz) | Minimum 6 dB bandwidth (MHz) | Conclusion |
|---------------------------|-------------------------|------------------------------|------------|
| 802.11b                   | 2412                    | 9.150                        | PASS       |
|                           | 2437                    | 9.154                        | PASS       |
|                           | 2462                    | 7.553                        | PASS       |
| 802.11g                   | 2412                    | 16.39                        | PASS       |
|                           | 2437                    | 16.39                        | PASS       |
|                           | 2462                    | 16.40                        | PASS       |
| 802.11n<br>HT20           | 2412                    | 17.62                        | PASS       |
|                           | 2437                    | 17.61                        | PASS       |
|                           | 2462                    | 17.64                        | PASS       |
| 802.11n<br>HT40           | 2422                    | 36.32                        | PASS       |
|                           | 2437                    | 36.39                        | PASS       |
|                           | 2452                    | 36.40                        | PASS       |
| Bluetooth<br>(Low Energy) | 2402                    | 0.6806                       | PASS       |
|                           | 2440                    | 0.6849                       | PASS       |
|                           | 2480                    | 0.6904                       | PASS       |




802.11b

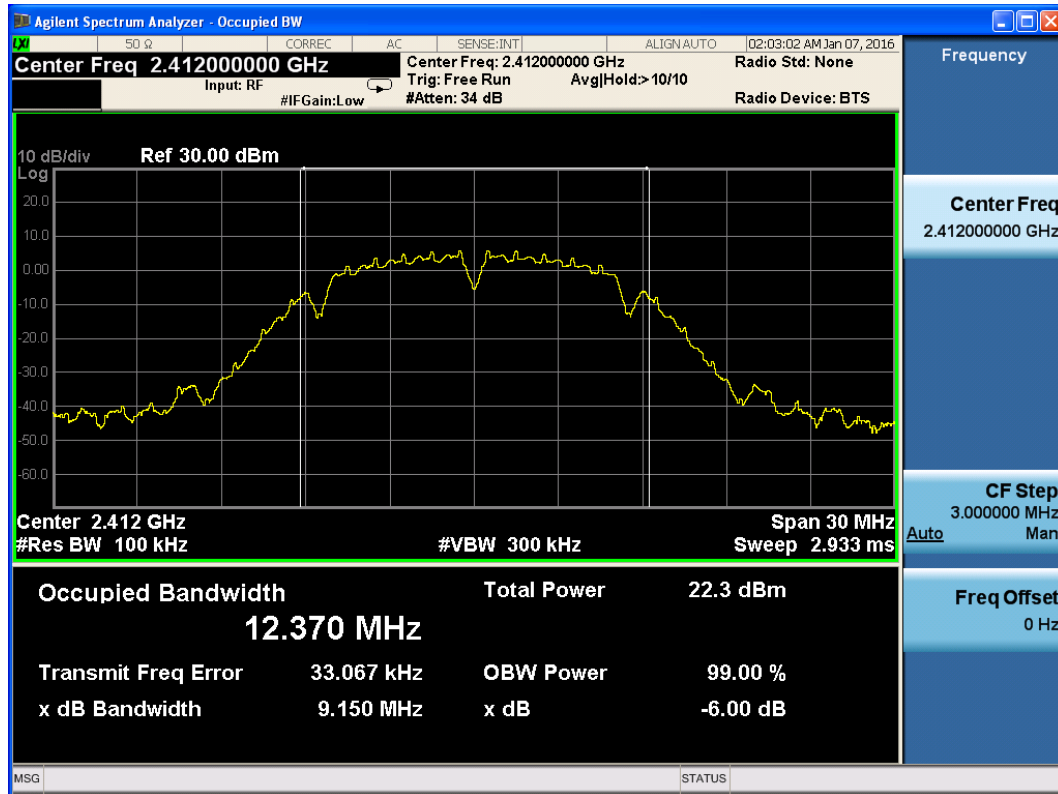

802.11b, Carrier frequency (MHz): 2412

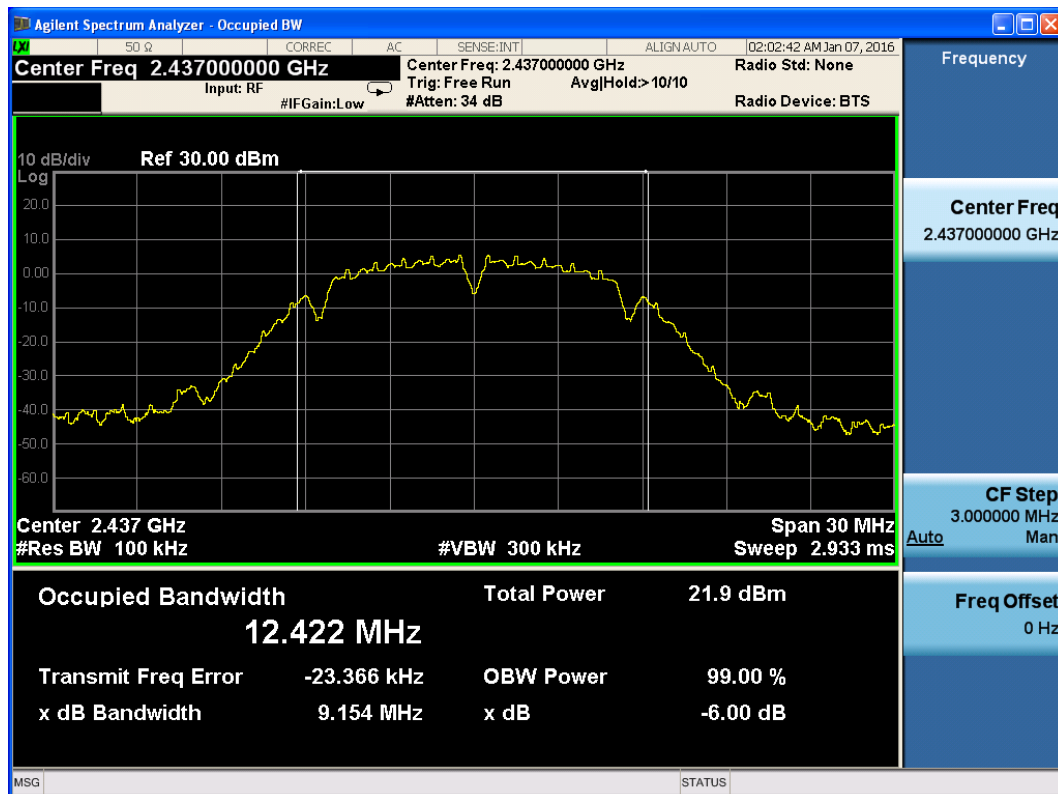


802.11b, Carrier frequency (MHz): 2437

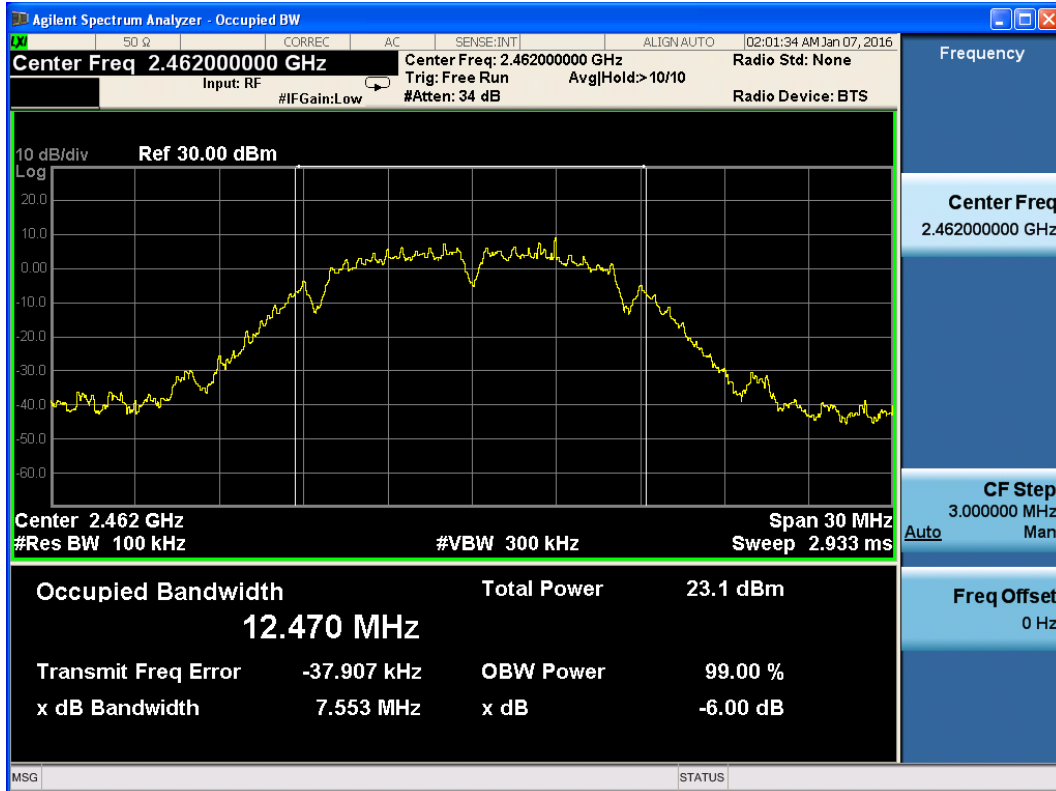


802.11b, Carrier frequency (MHz):2462


802.11g

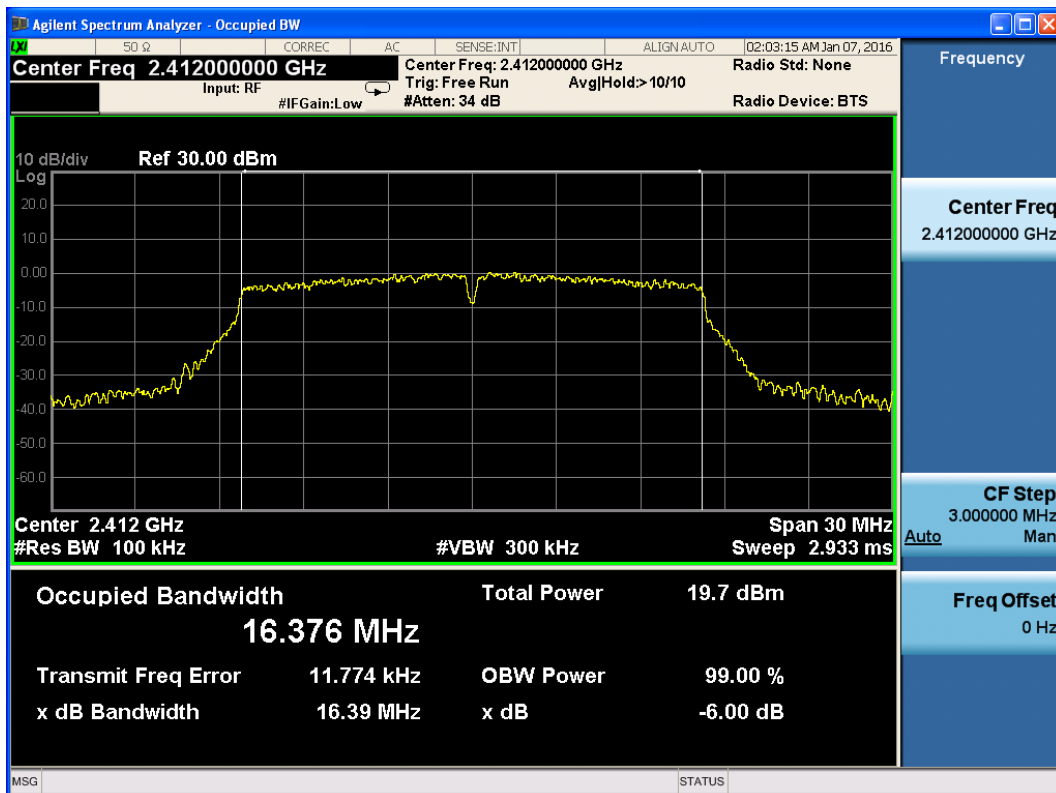

802.11g, Carrier frequency (MHz): 2412

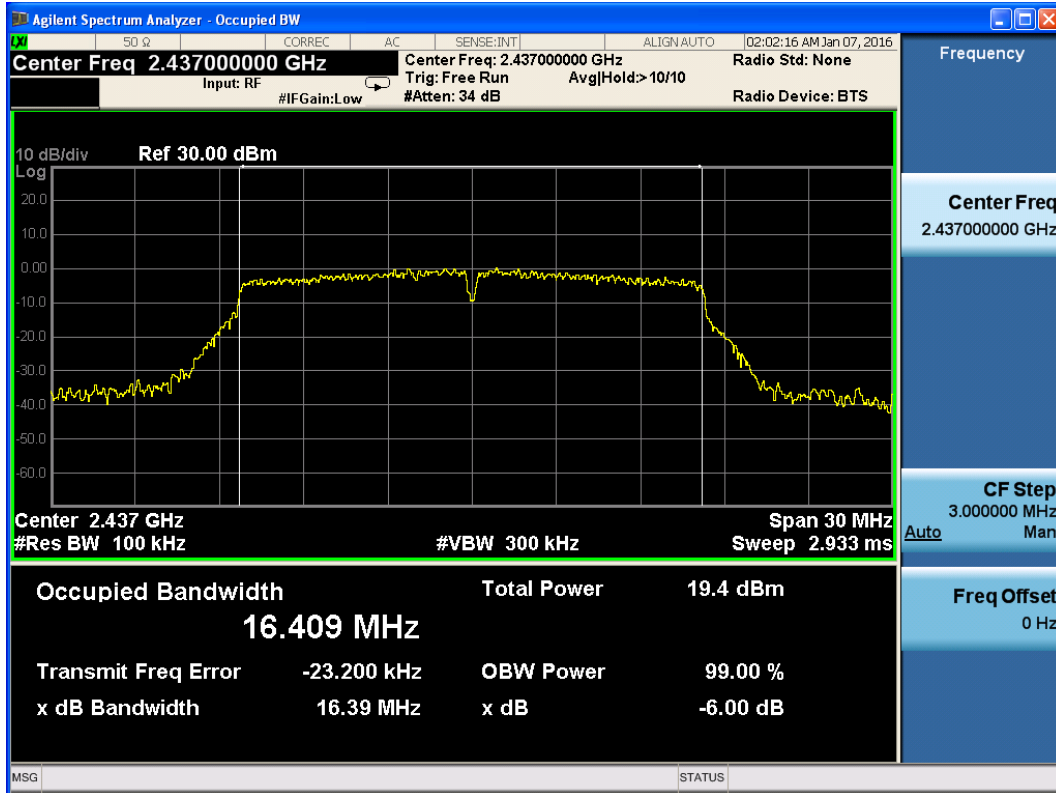


802.11g, Carrier frequency (MHz): 2437

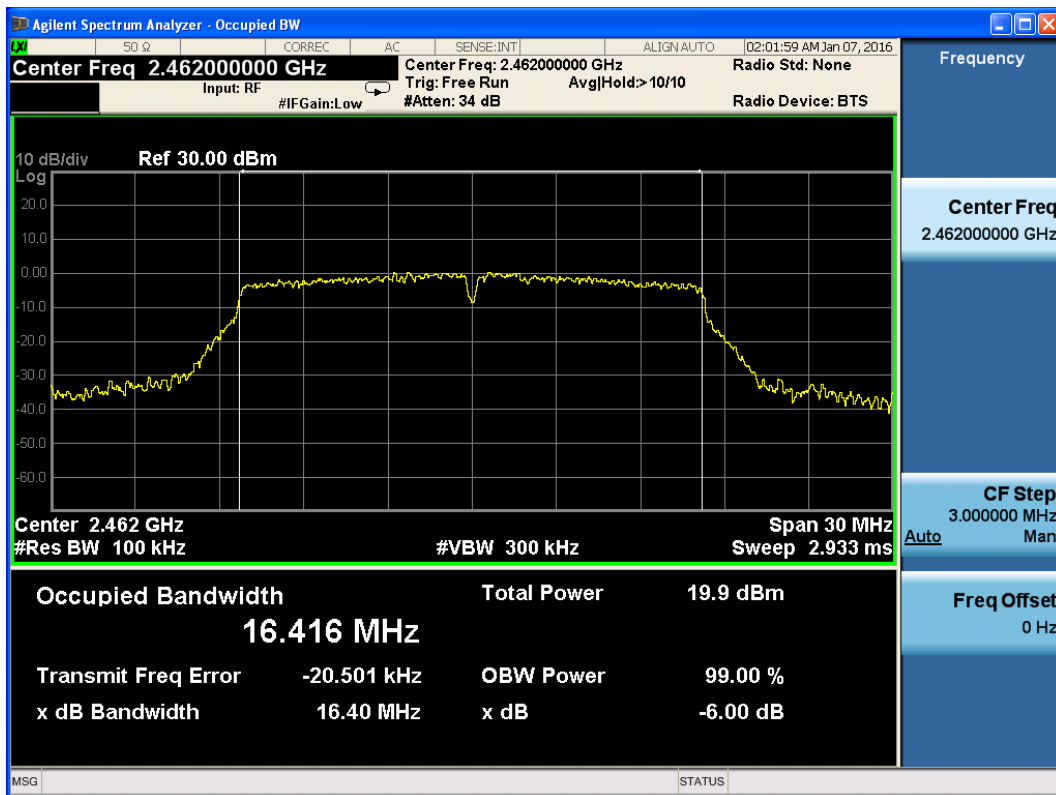


802.11g, Carrier frequency (MHz): 2462




802.11n (HT20)

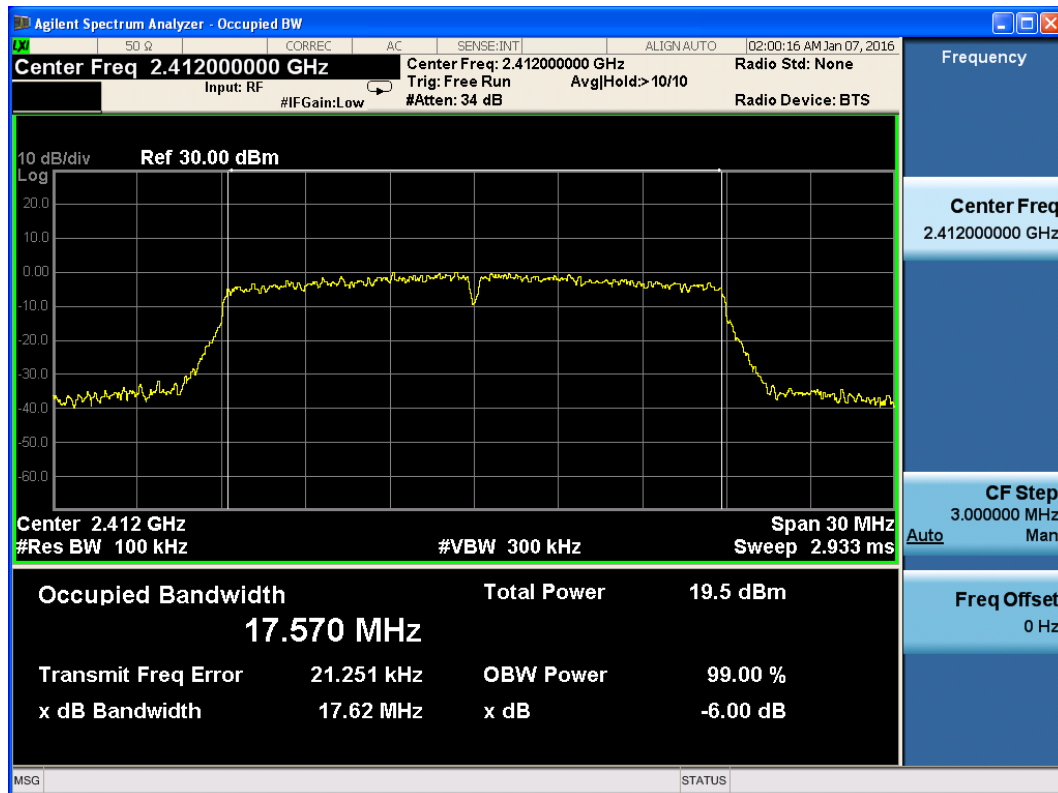

802.11n, Carrier frequency (MHz): 2412

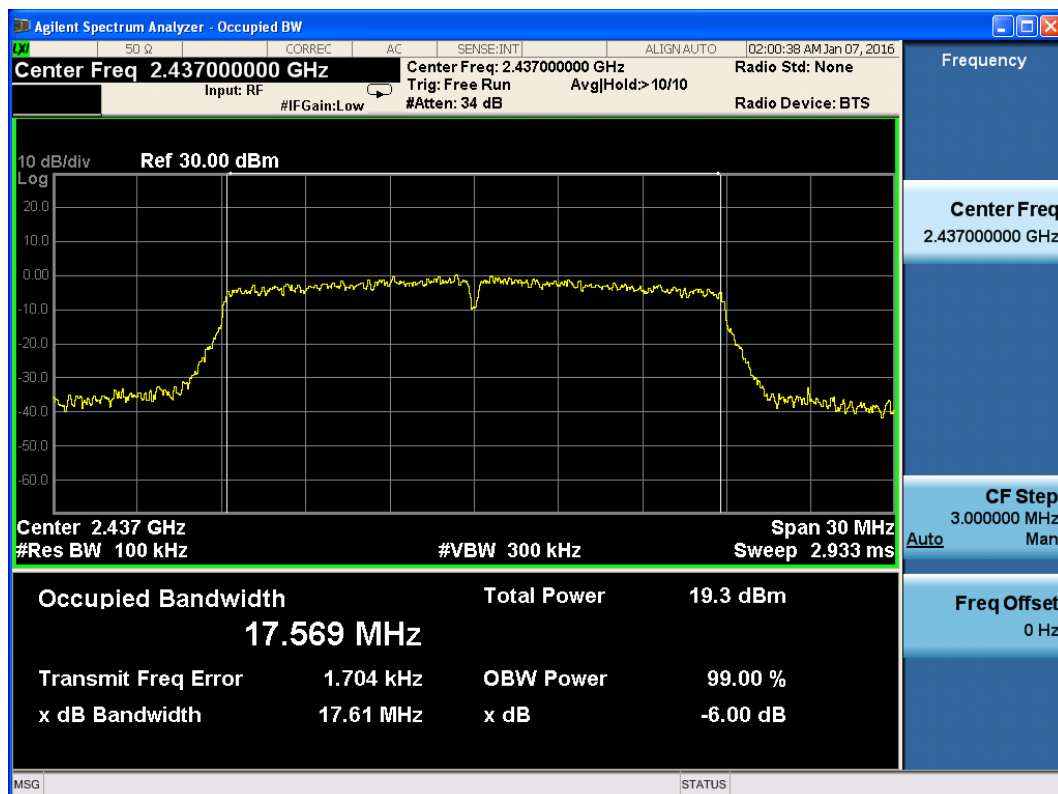


802.11n, Carrier frequency (MHz): 2437

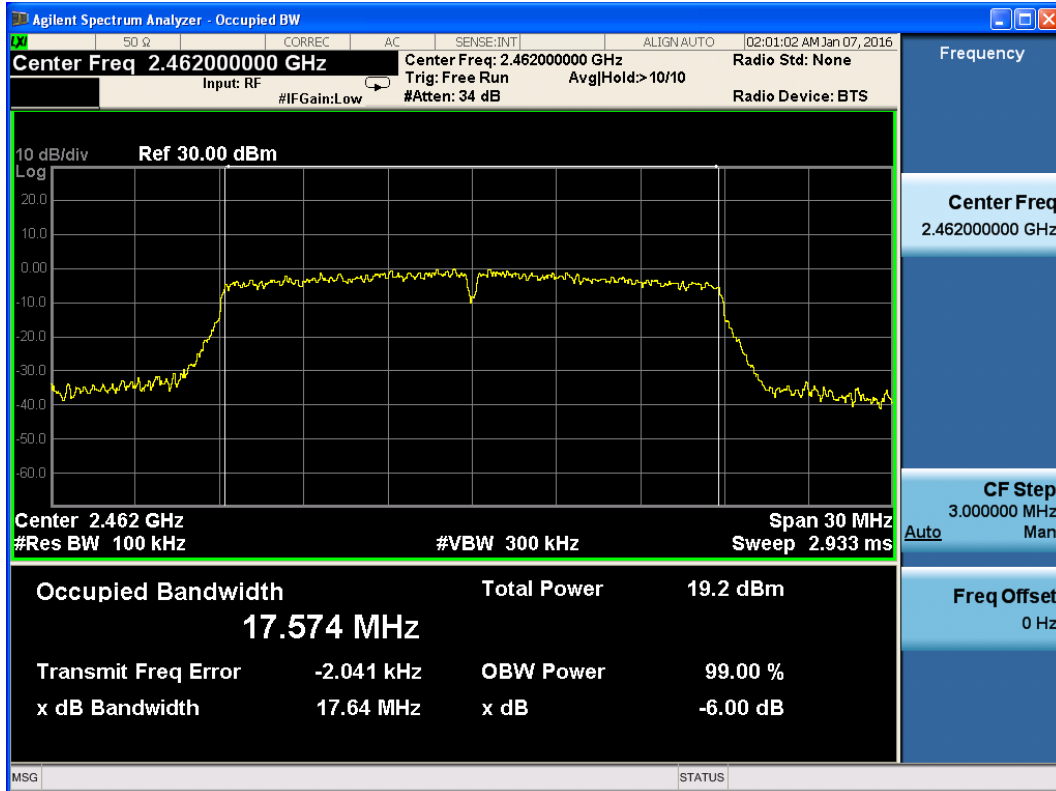


802.11n, Carrier frequency (MHz):2462


802.11n (HT40)

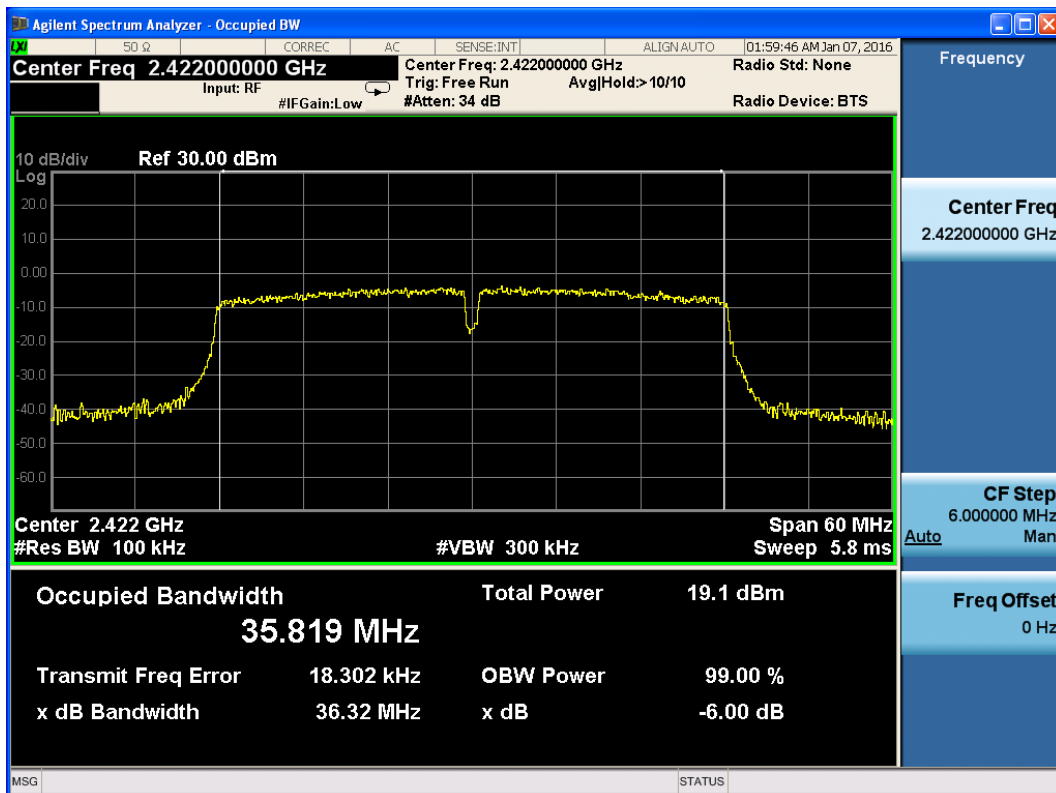

802.11n, Carrier frequency (MHz): 2422

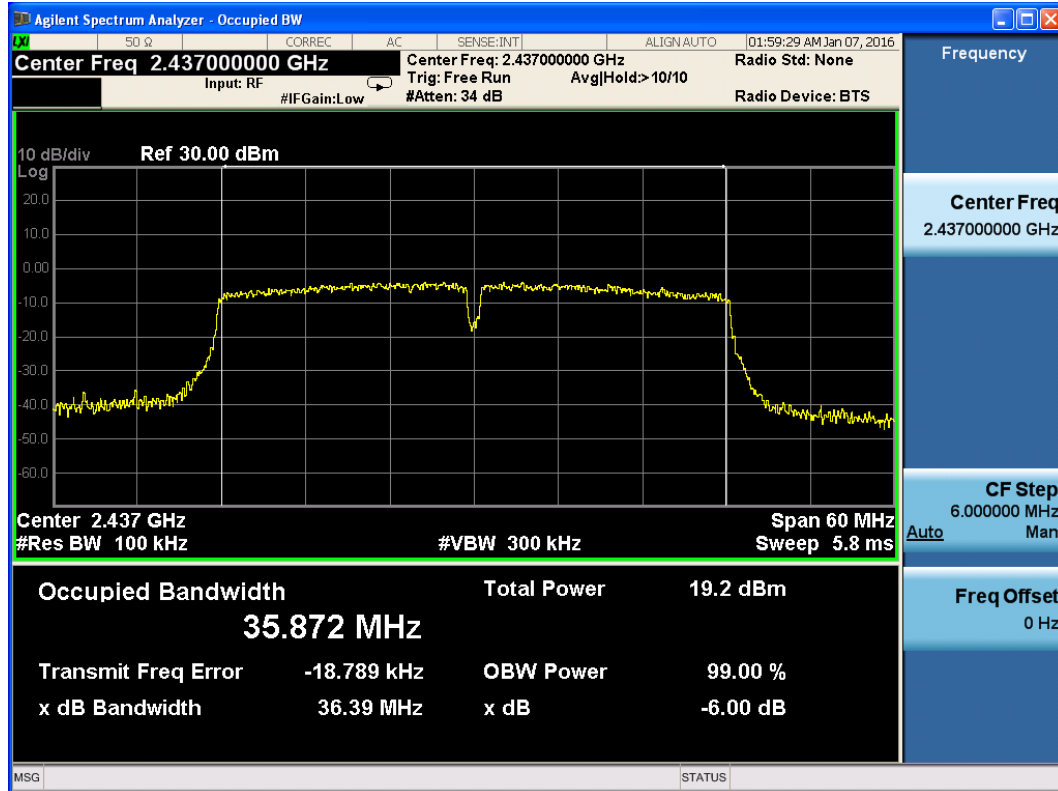


802.11n, Carrier frequency (MHz): 2437

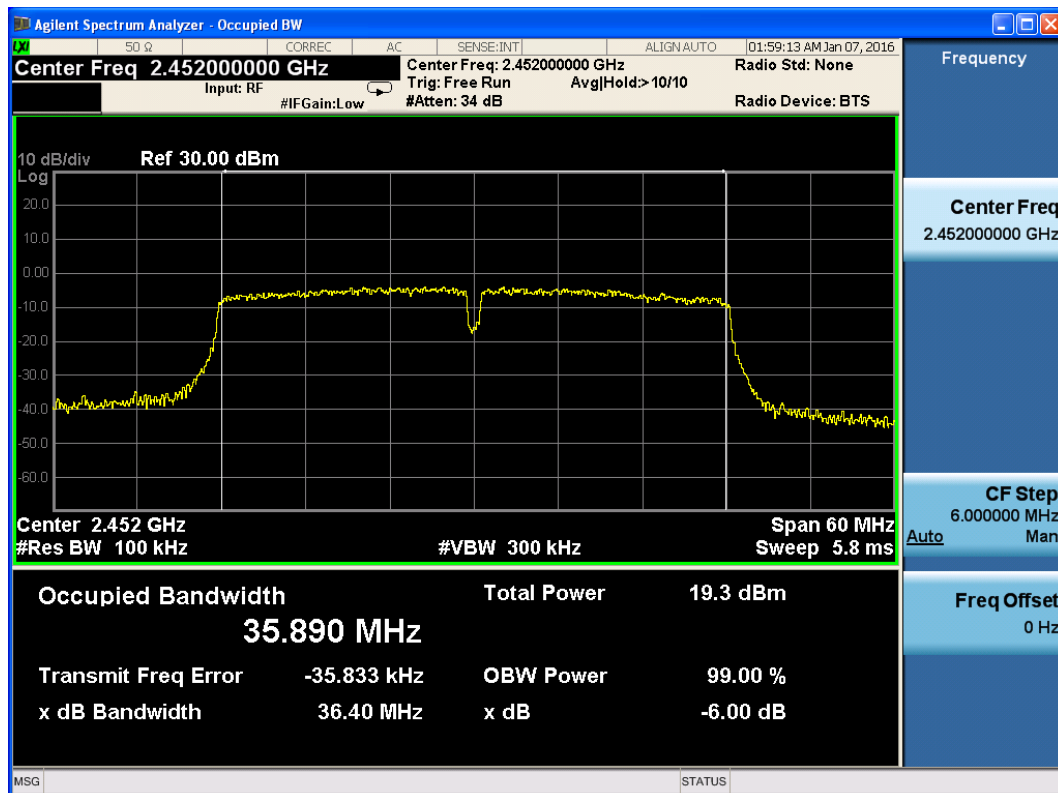


802.11n, Carrier frequency (MHz):2452




BLE

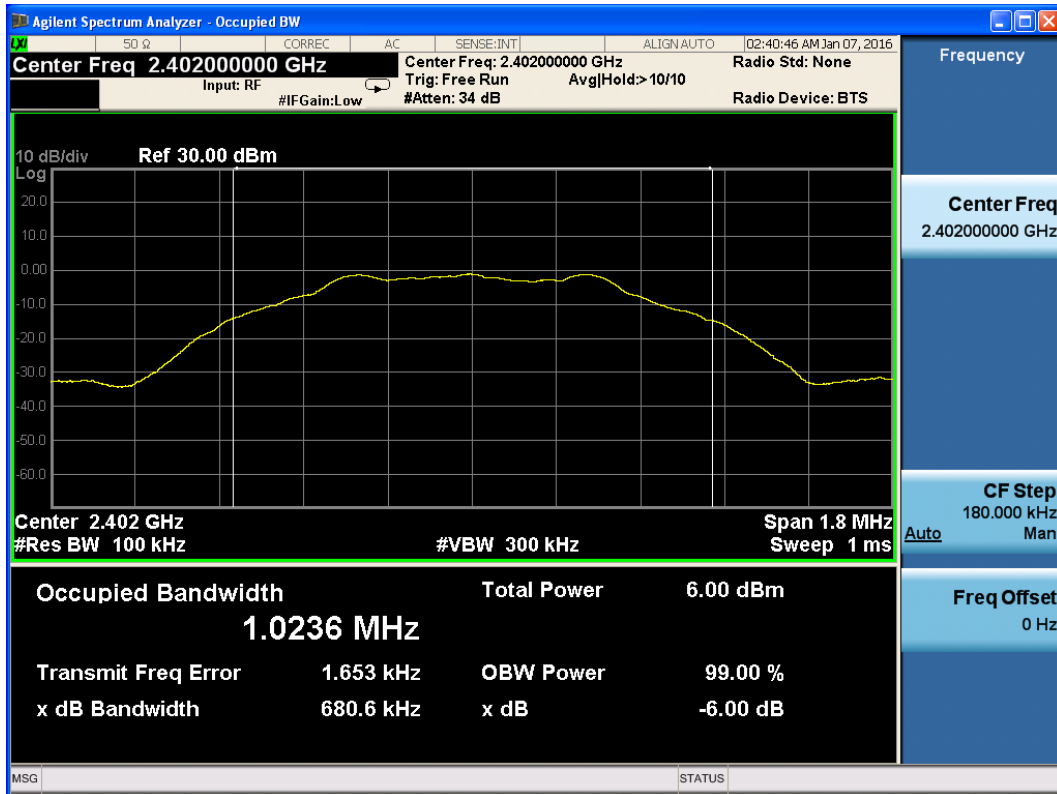

BLE Carrier frequency (MHz): 2402

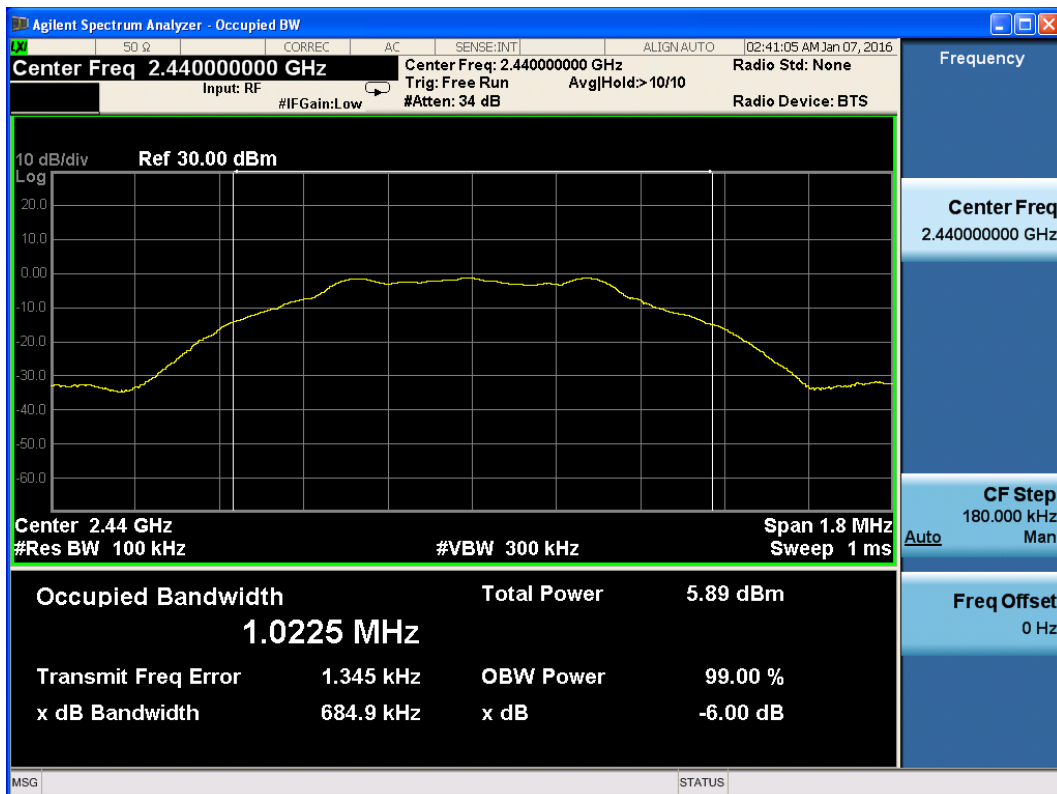

BLE Carrier frequency (MHz): 2440

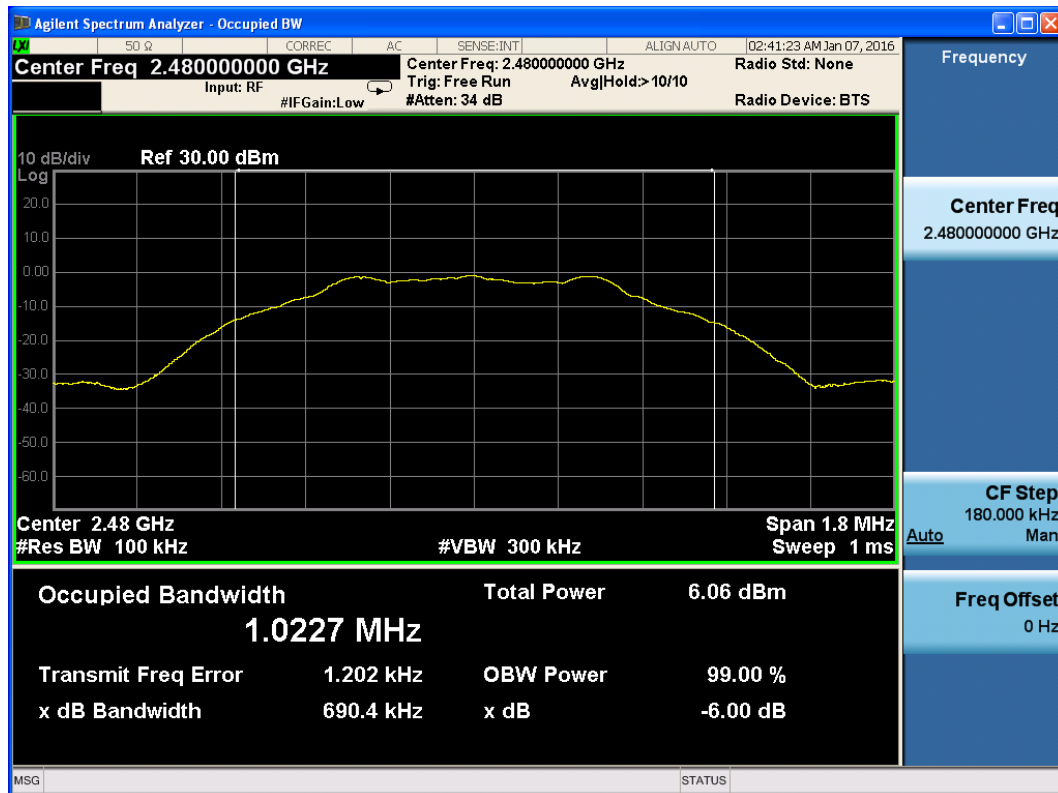

BLE Carrier frequency (MHz): 2480

### 5.3. Band Edge Compliance


#### Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |

#### Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable the band edge of the lowest and highest channels were measured. The peak detector is used and RBW is set to 100 kHz and VBW is set to 300 kHz on spectrum analyzer. Spectrum analyzer plots are included on the following pages.

#### Test Setup



#### Limits

Rule Part 15.247(d) specifies that "In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement."

#### Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .

| Frequency | Uncertainty |
|-----------|-------------|
| 2GHz-3GHz | 1.407 dB    |




## Test Results:

802.11b

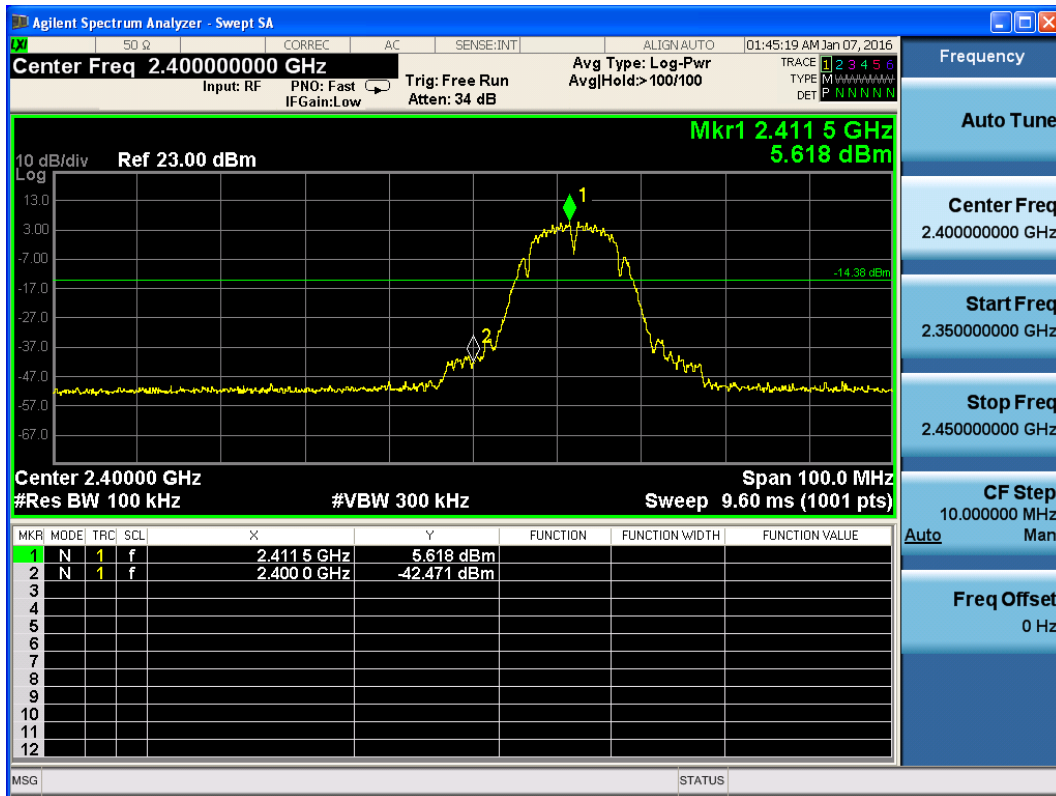


802.11b, Channel No.: 1

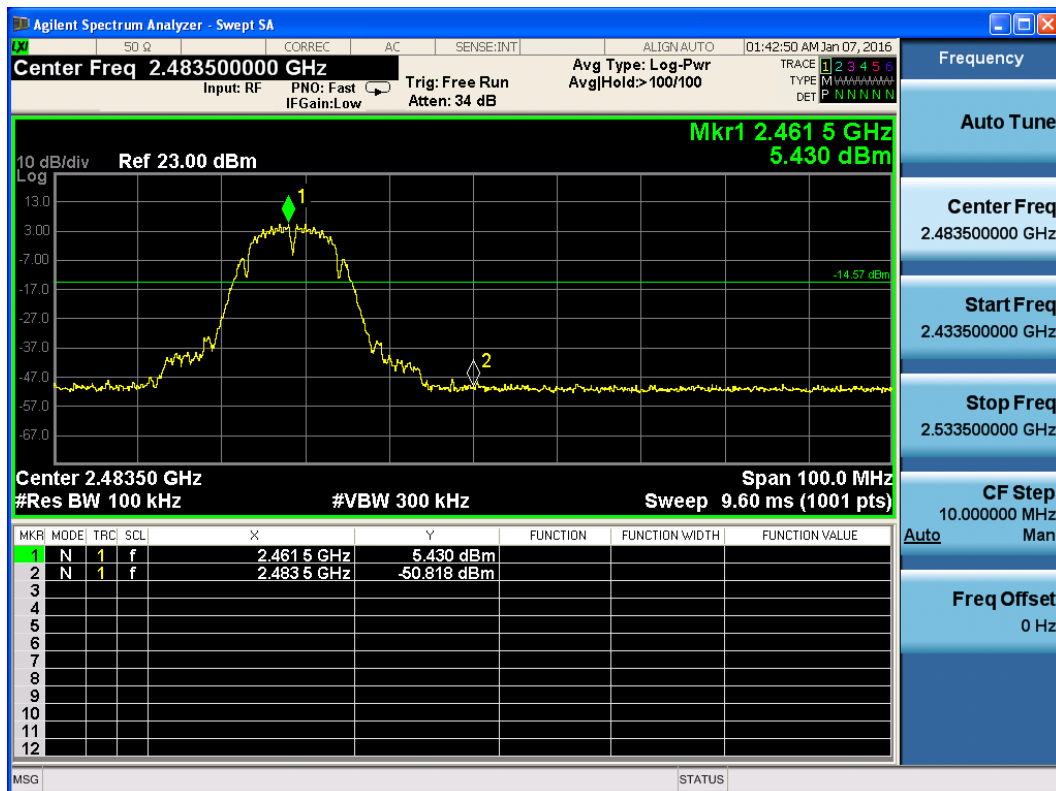


802.11b, Channel No.: 11



802.11g

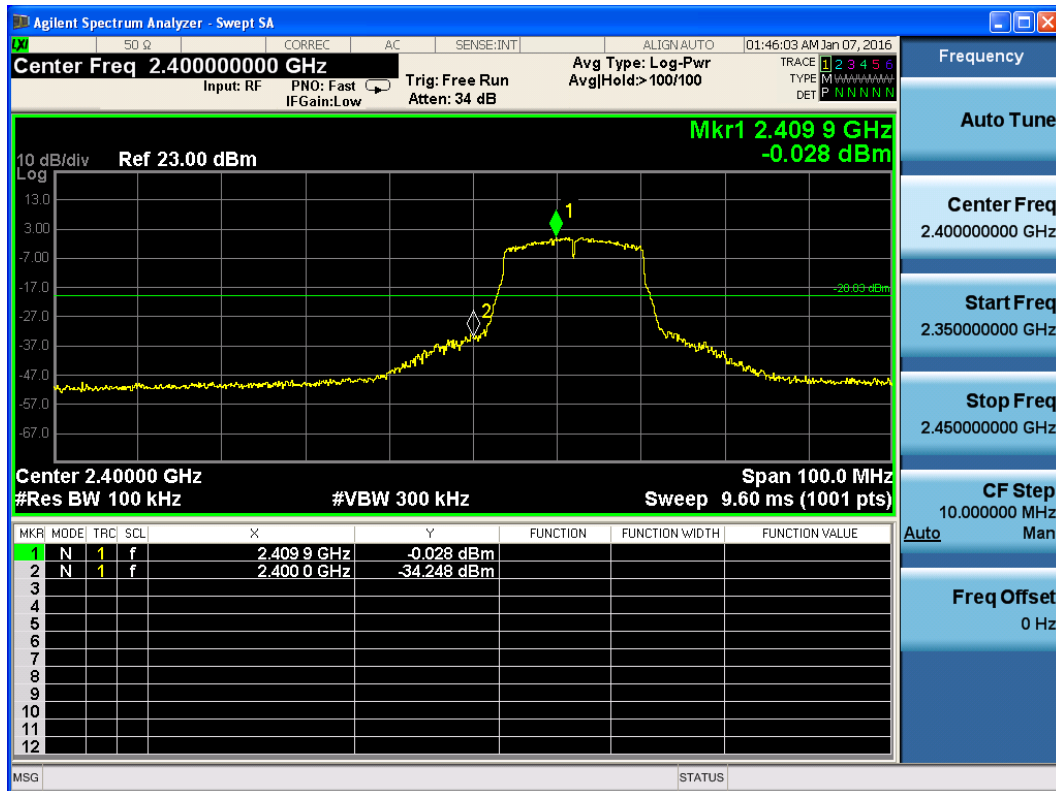


802.11g, Channel No.: 1

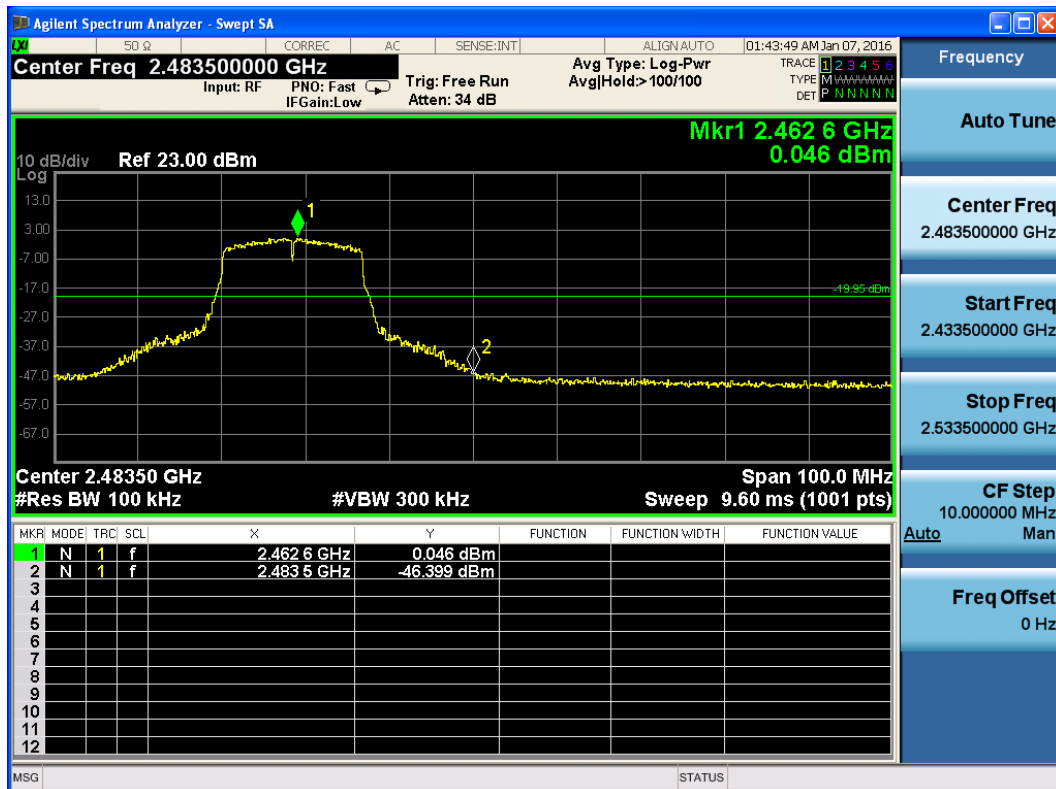


802.11g, Channel No.: 11



## 802.11n (HT20)

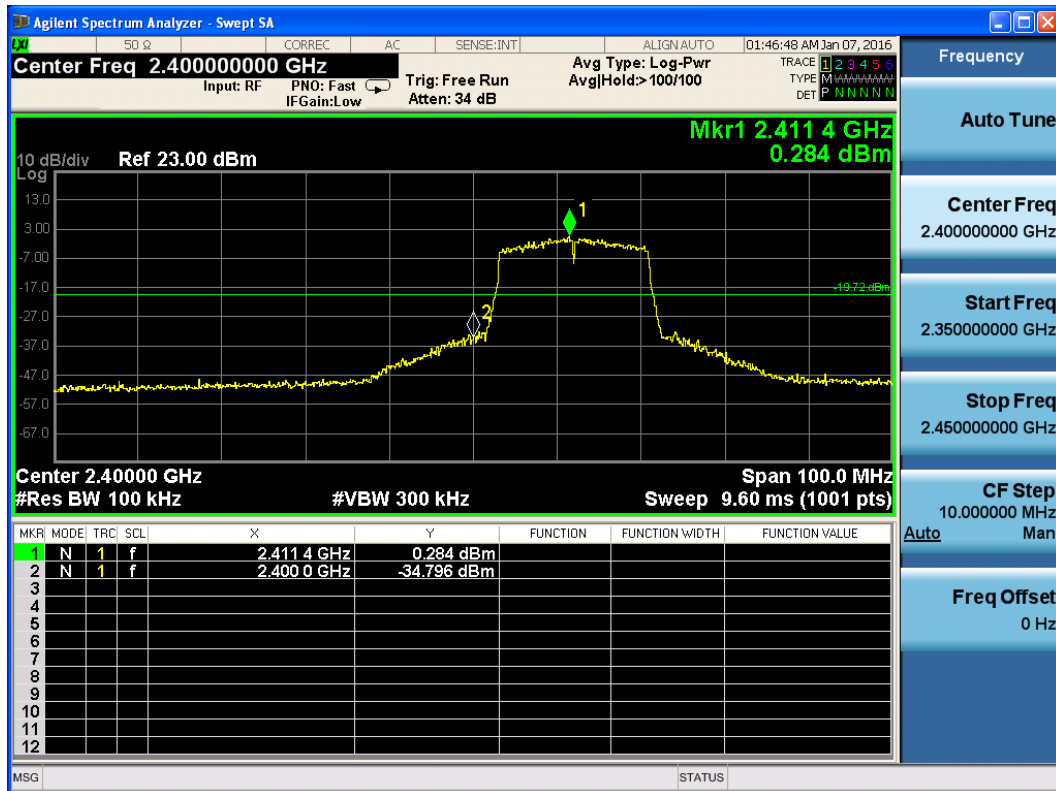


802.11n, Channel No.: 1

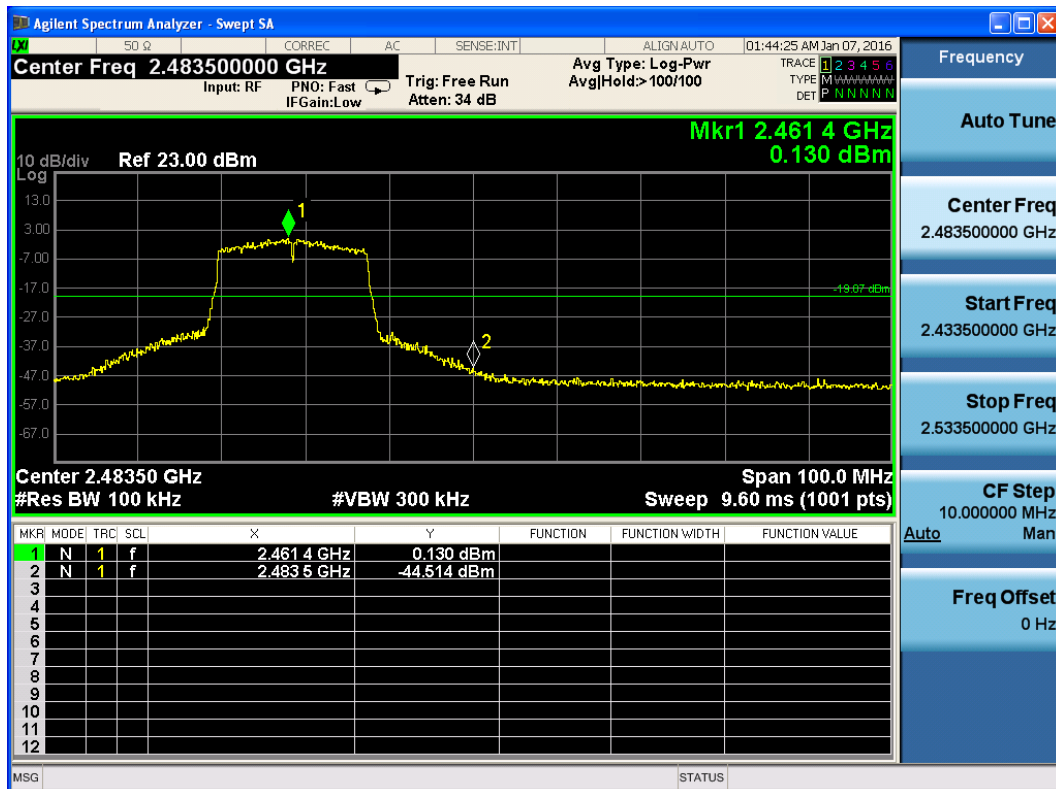


802.11n, Channel No.: 11



802.11n (HT40)

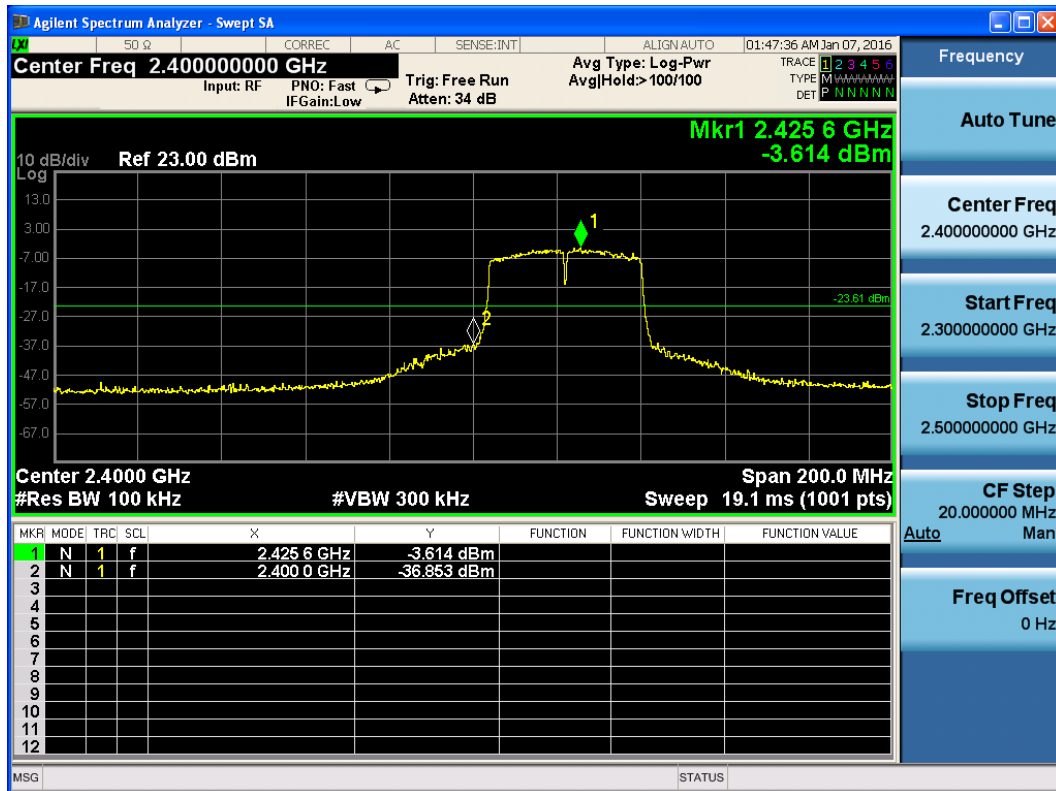


802.11n, Channel No.: 3

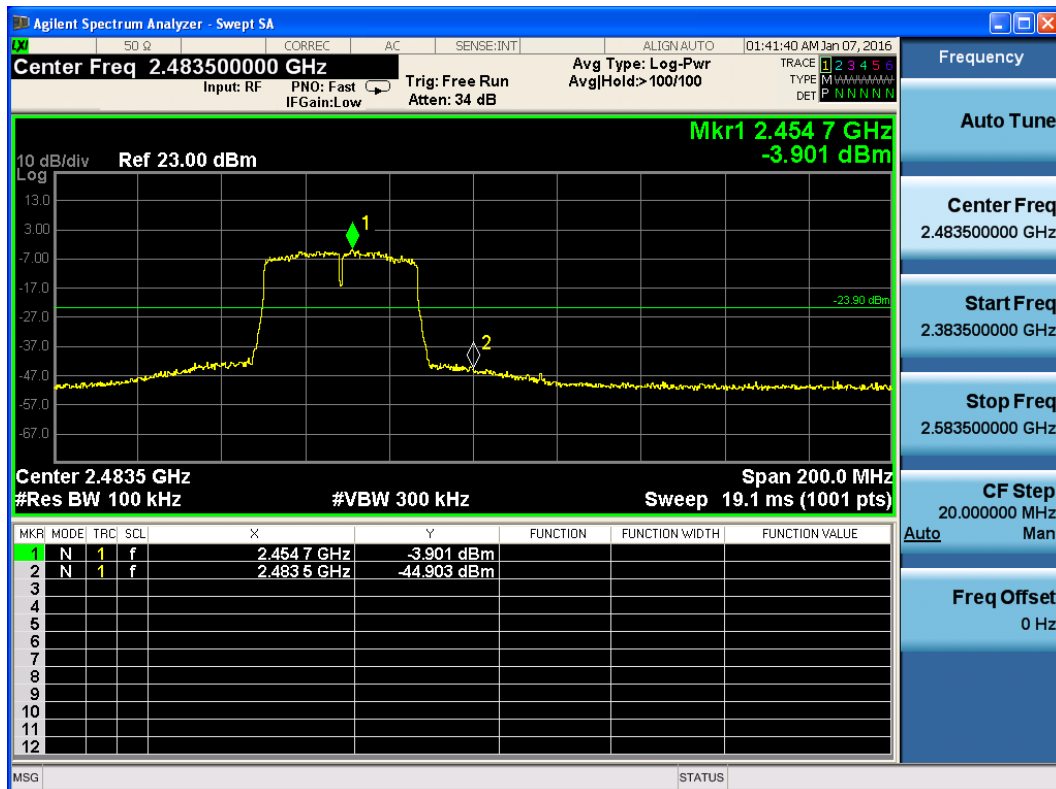


802.11n, Channel No.: 9



BLE

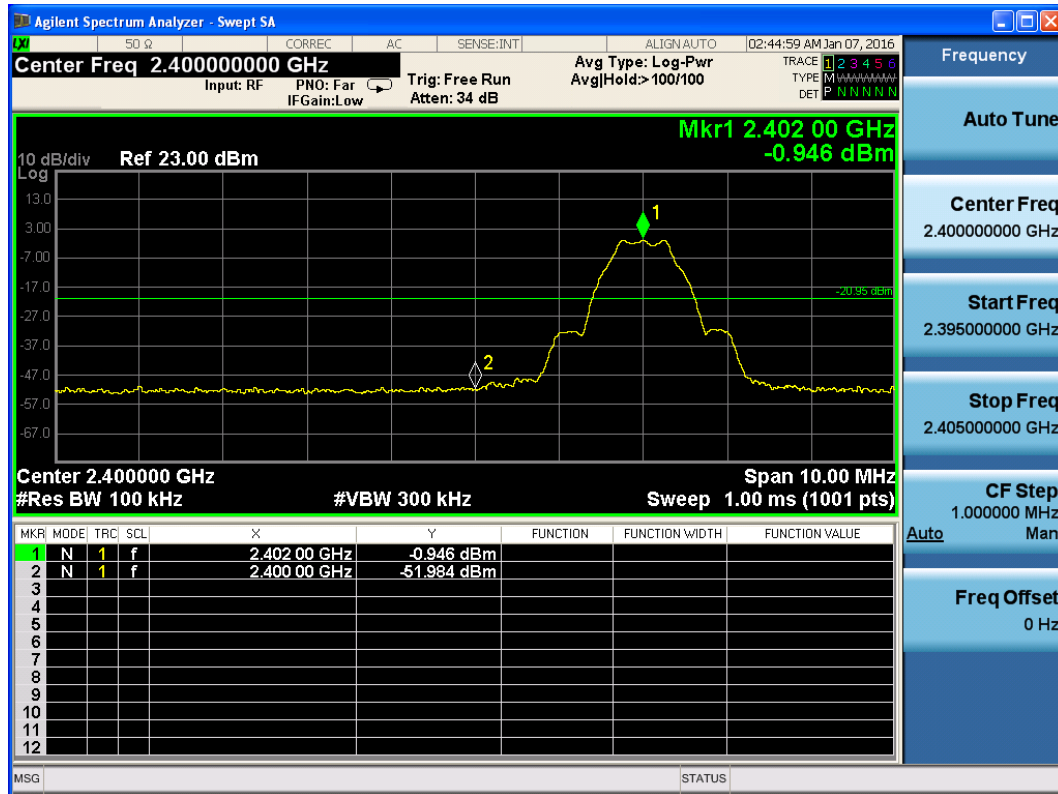

BLE, Channel No.: 0

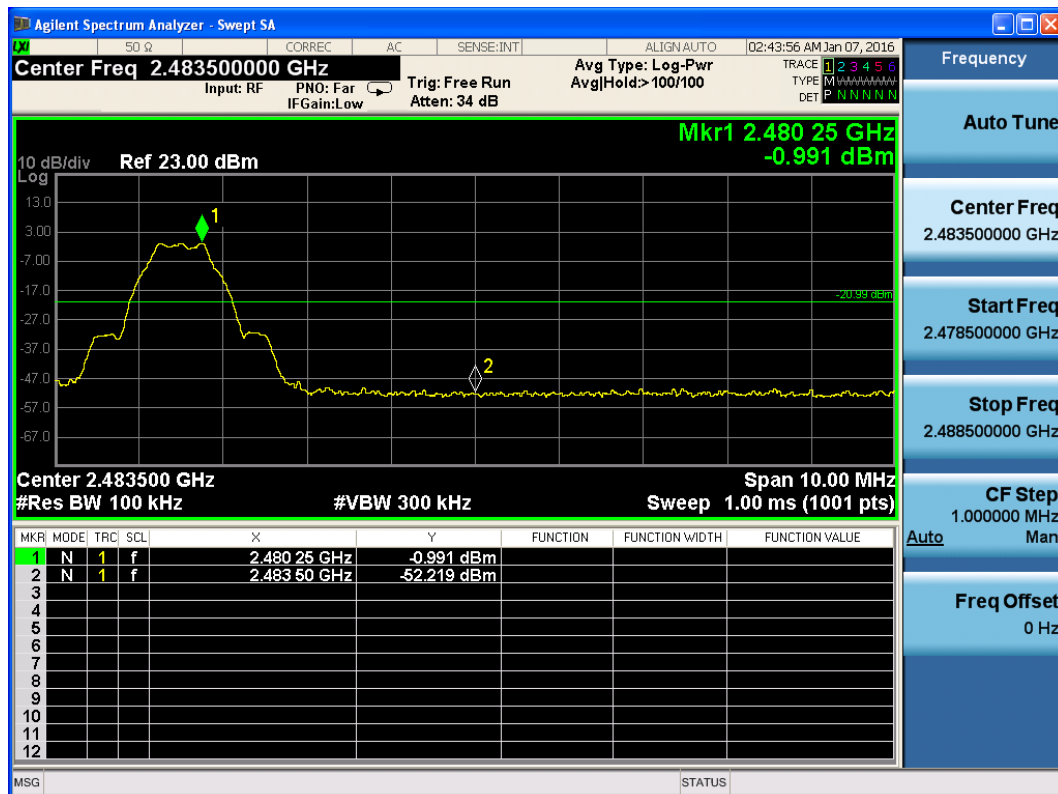

BLE, Channel No.: 39

## 5.4. Spurious Radiated Emissions in the restricted band

### Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. RBW is set to 100kHz. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

Set the spectrum analyzer in the following:


- (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
- (b) AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

This setting method can refer to **KDB 558074**.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Y axis) and the antenna is vertical.

The test is in transmitting mode.

### Test setup

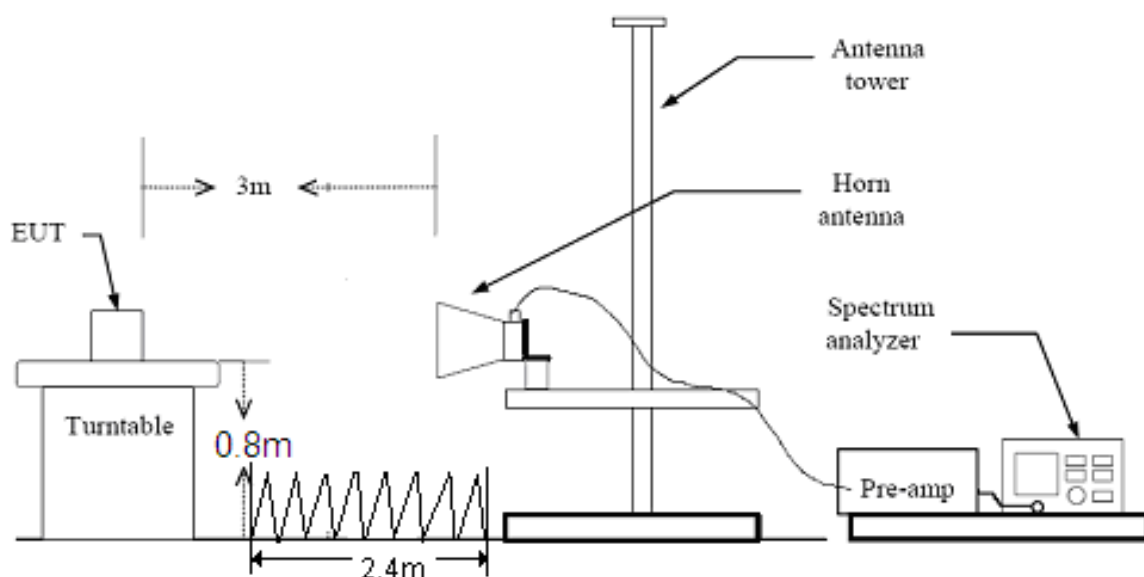

Note: Area side:2.4mX3.6m

### Limits

Spurious Radiated Emissions are permitted in any of the frequency bands listed below:

| MHz                        | MHz                   | MHz             | GHz              |
|----------------------------|-----------------------|-----------------|------------------|
| 0.090 - 0.110              | 16.42 - 16.423        | 399.9 - 410     | 4.5 - 5.15       |
| <sup>1</sup> 0.495 - 0.505 | 16.69475 - 16.69525   | 608 - 614       | 5.35 - 5.46      |
| 2.1735 - 2.1905            | 16.80425 - 16.80475   | 960 - 1240      | 7.25 - 7.75      |
| 4.125 - 4.128              | 25.5 - 25.67          | 1300 - 1427     | 8.025 - 8.5      |
| 4.17725 - 4.17775          | 37.5 - 38.25          | 1435 - 1626.5   | 9.0 - 9.2        |
| 4.20725 - 4.20775          | 73 - 74.6             | 1645.5 - 1646.5 | 9.3 - 9.5        |
| 6.215 - 6.218              | 74.8 - 75.2           | 1660 - 1710     | 10.6 - 12.7      |
| 6.26775 - 6.26825          | 108 - 121.94          | 1718.8 - 1722.2 | 13.25 - 13.4     |
| 6.31175 - 6.31225          | 123 - 138             | 2200 - 2300     | 14.47 - 14.5     |
| 8.291 - 8.294              | 149.9 - 150.05        | 2310 - 2390     | 15.35 - 16.2     |
| 8.362 - 8.366              | 156.52475 - 156.52525 | 2483.5 - 2500   | 17.7 - 21.4      |
| 8.37625 - 8.38675          | 156.7 - 156.9         | 2690 - 2900     | 22.01 - 23.12    |
| 8.41425 - 8.41475          | 162.0125 - 167.17     | 3260 - 3267     | 23.6 - 24.0      |
| 12.29 - 12.293             | 167.72 - 173.2        | 3332 - 3339     | 31.2 - 31.8      |
| 12.51975 - 12.52025        | 240 - 285             | 3345.8 - 3358   | 36.43 - 36.5     |
| 12.57675 - 12.57725        | 322 - 335.4           | 3600 - 4400     | ( <sup>2</sup> ) |
| 13.36 - 13.41              |                       |                 |                  |

Limit in restricted band

| Frequency of emission (MHz) | Field strength(uV/m) | Field strength(dBuV/m) |
|-----------------------------|----------------------|------------------------|
| 0.009–0.490                 | 2400/F(kHz)          | /                      |
| 0.490–1.705                 | 24000/F(kHz)         | /                      |
| 1.705–30.0                  | 30                   | /                      |
| 30-88                       | 100                  | 40                     |
| 88-216                      | 150                  | 43.5                   |
| 216-960                     | 200                  | 46                     |
| Above960                    | 500                  | 54                     |

§15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Peak Limit=74 dBuV/m

Average Limit=54 dBuV/m

### Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U = 3.55$  dB

**Test result:**

The messy code (dB<sub>碼</sub>/m) including in the following plots mean dBuV/m.


**802.11b-Channel 1:**

**Peak**

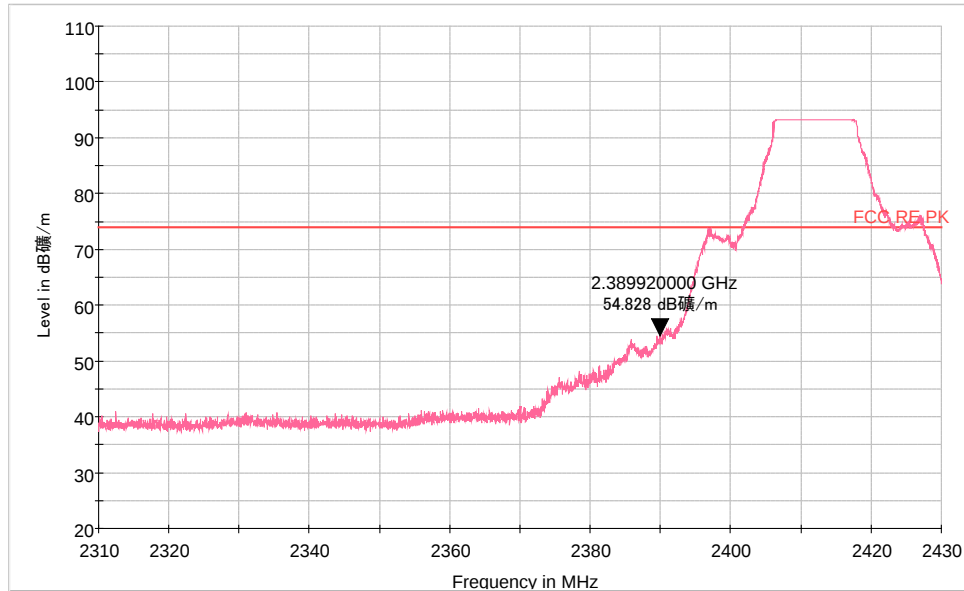

Note: The signal beyond the limit is carrier


**Average**

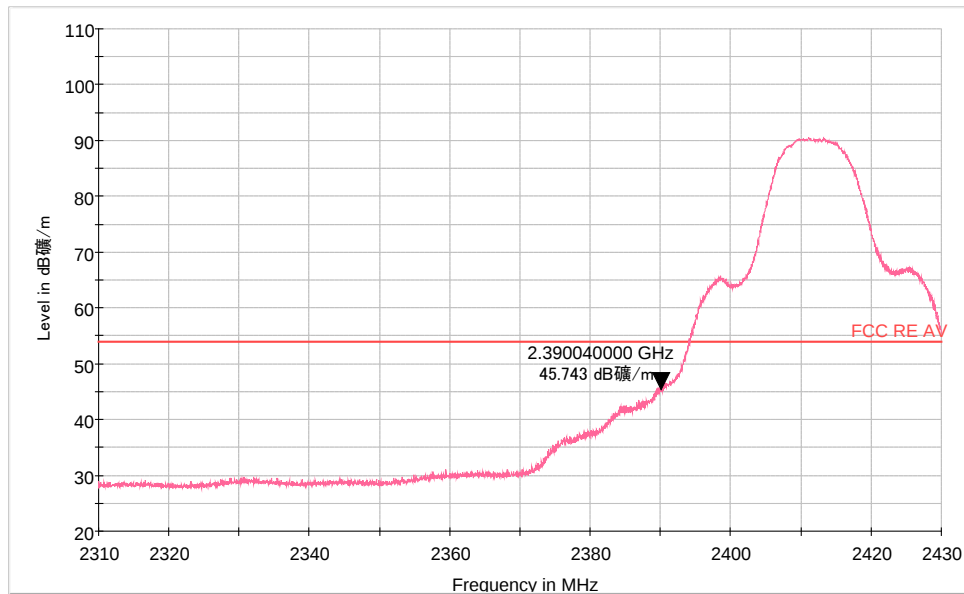

Note: The signal beyond the limit is carrier


## 802.11b-Channel 11:

### Peak

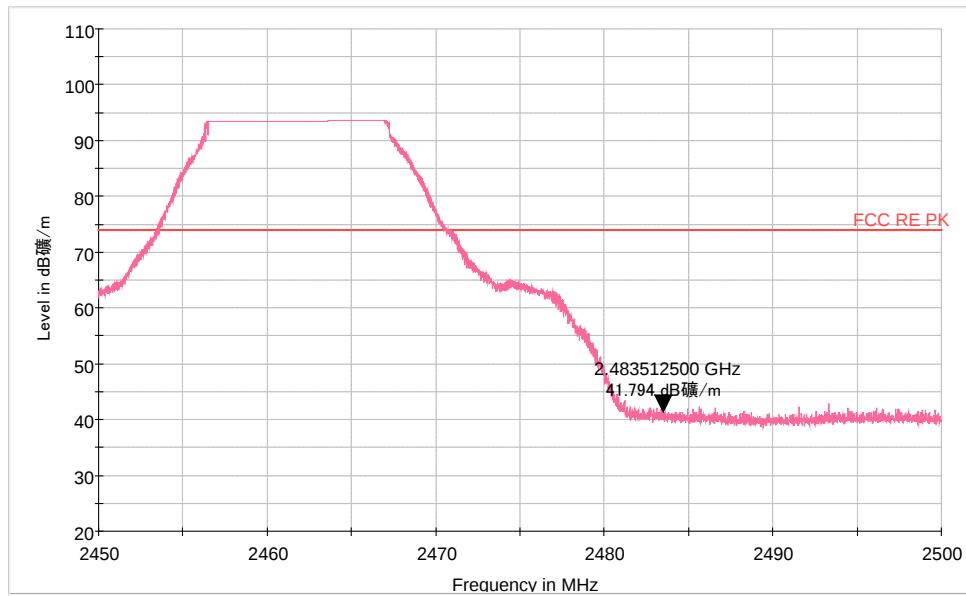

Note: The signal beyond the limit is carrier


### Average

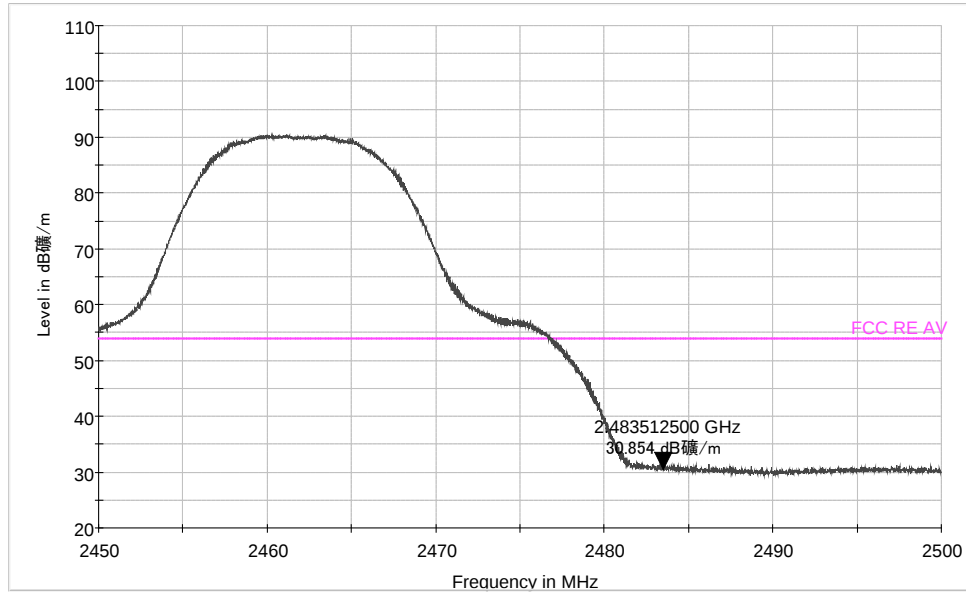

Note: The signal beyond the limit is carrier


## 802.11g-Channel 1:

### Peak

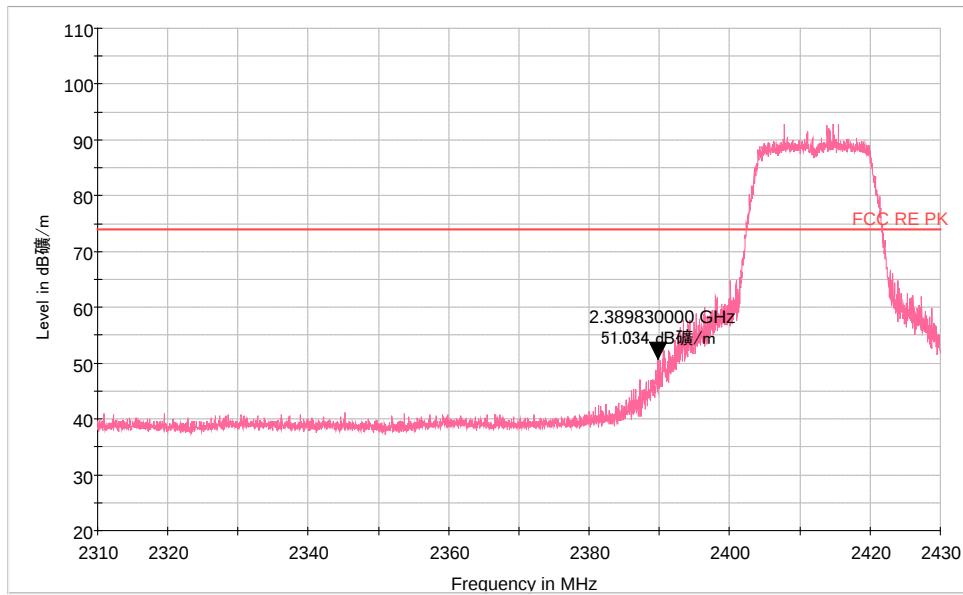

Note: The signal beyond the limit is carrier


### Average

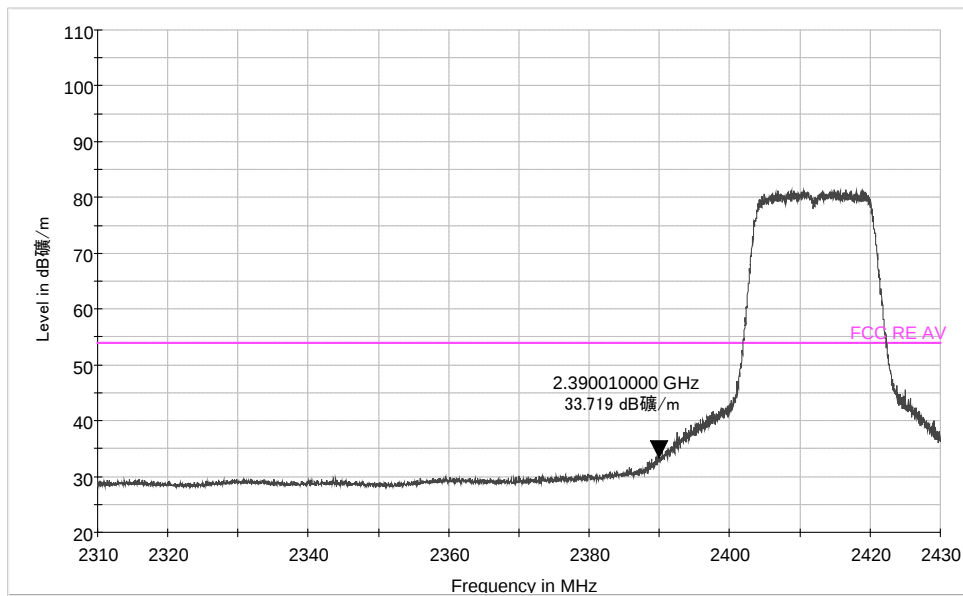

Note: The signal beyond the limit is carrier


## 802.11g-Channel 11:

### Peak

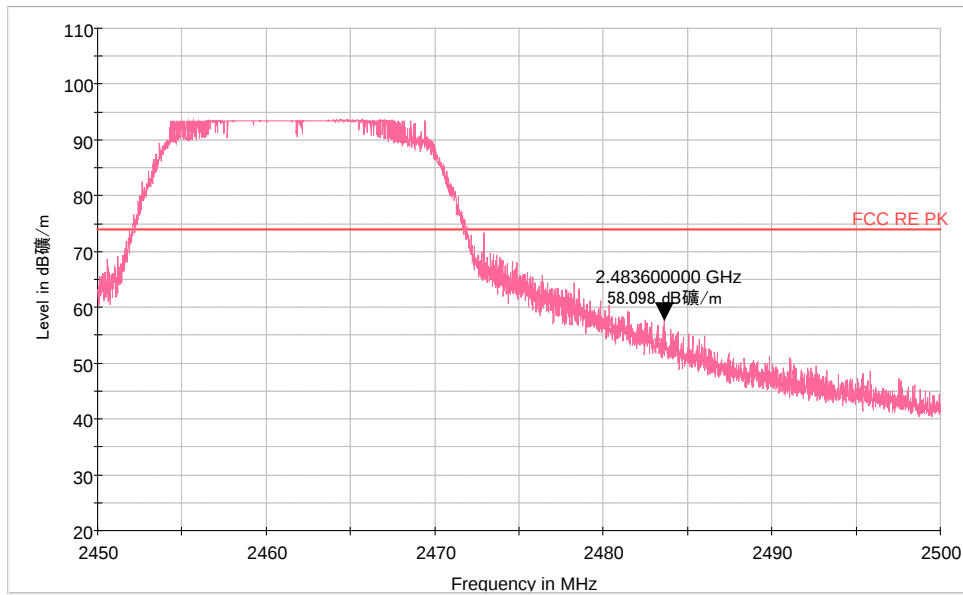

Note: The signal beyond the limit is carrier


### Average

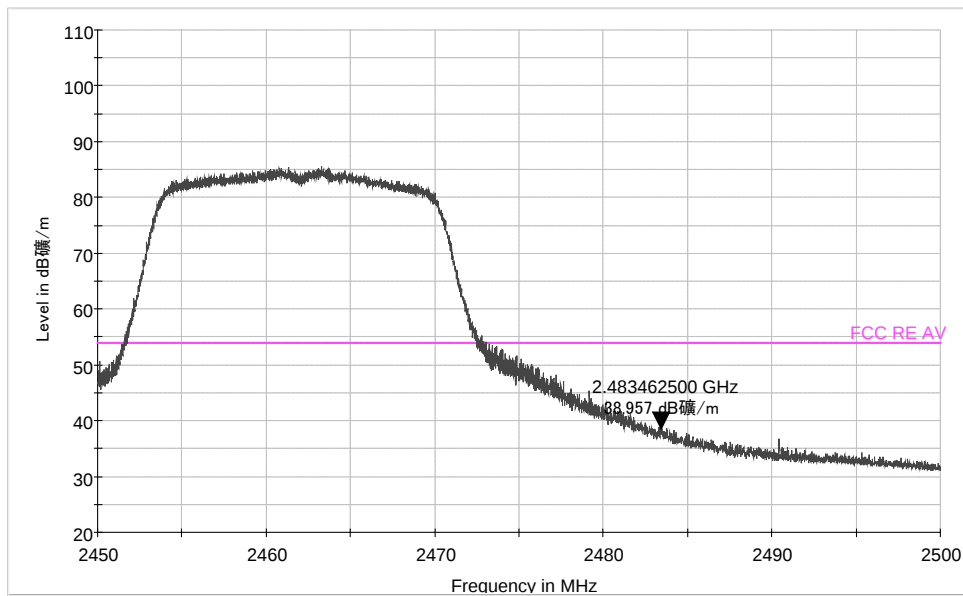

Note: The signal beyond the limit is carrier


802.11n-Channel 1(HT20):

Peak

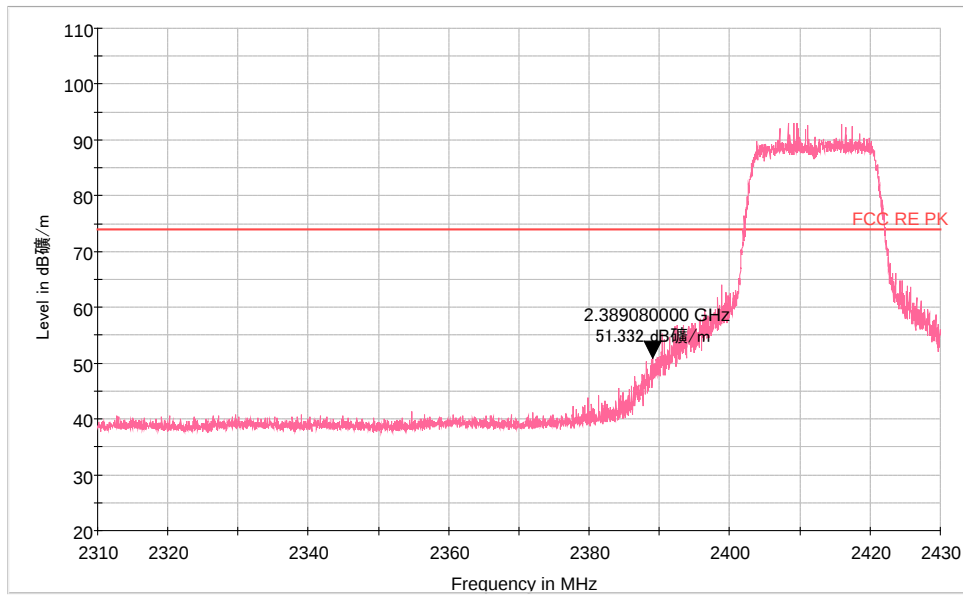

Note: The signal beyond the limit is carrier


Average

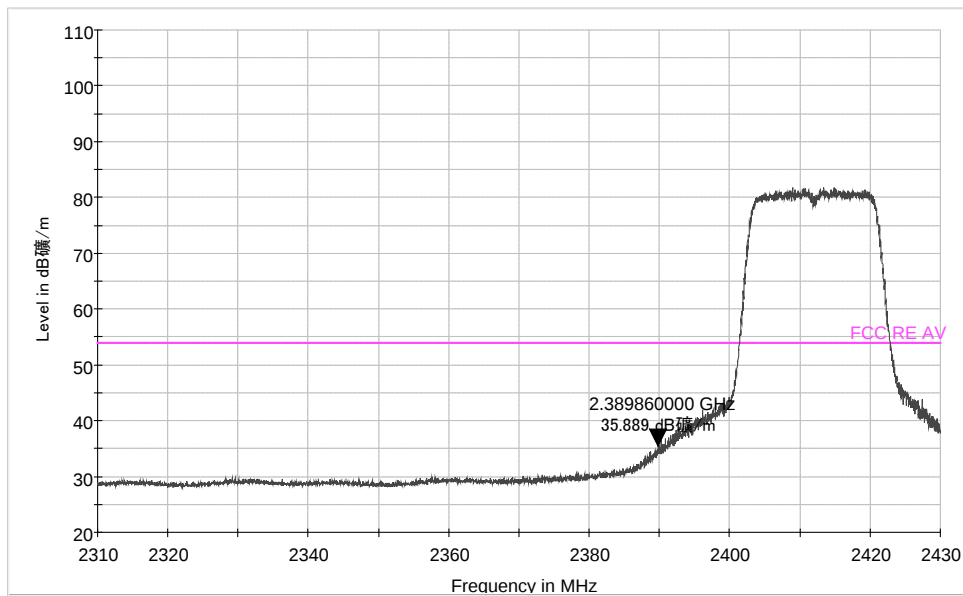

Note: The signal beyond the limit is carrier


**802.11n-Channel 11(HT20):**

**Peak**

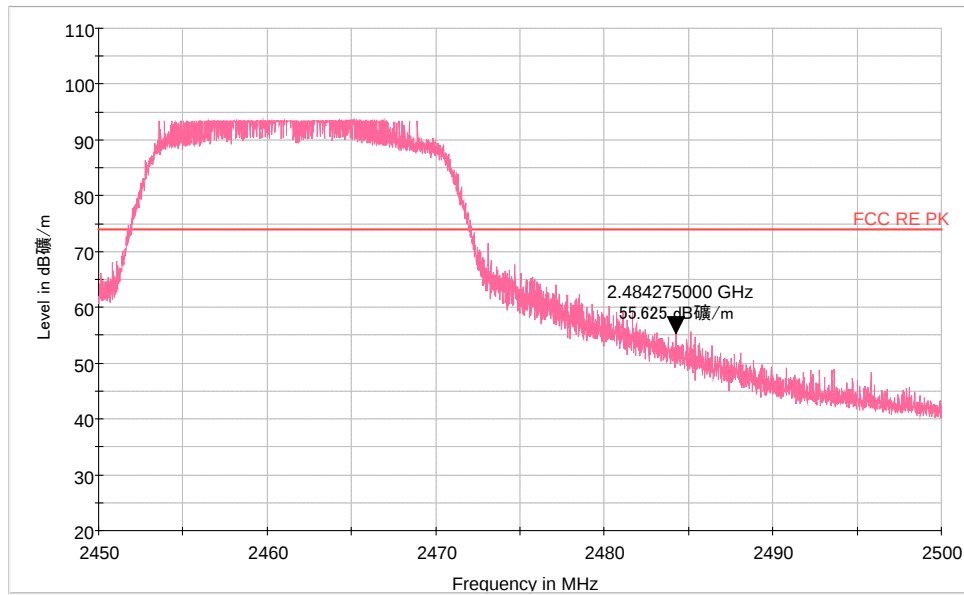

Note: The signal beyond the limit is carrier


**Average**

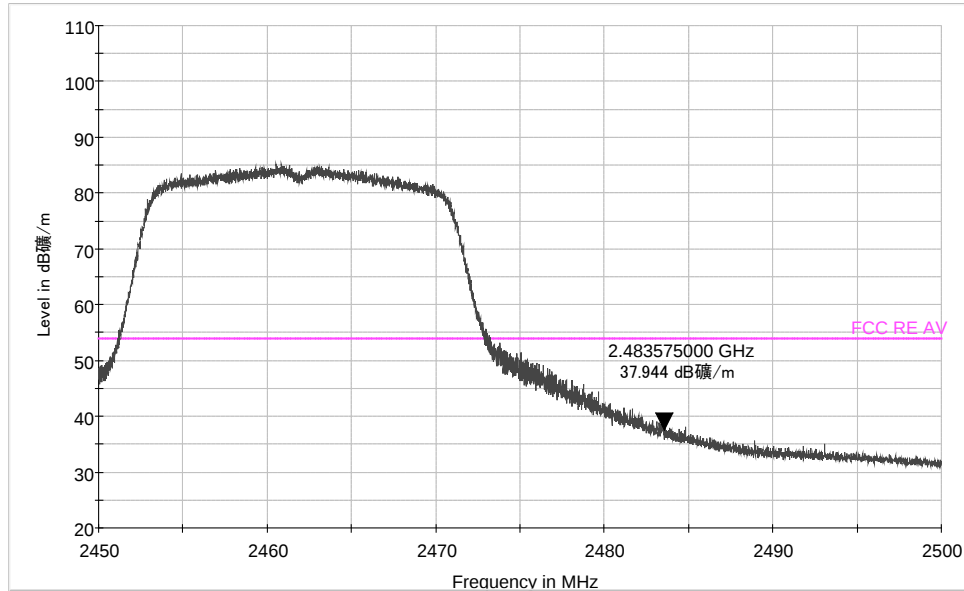

Note: The signal beyond the limit is carrier


# 802.11n-Channel 3(HT40):

## Peak

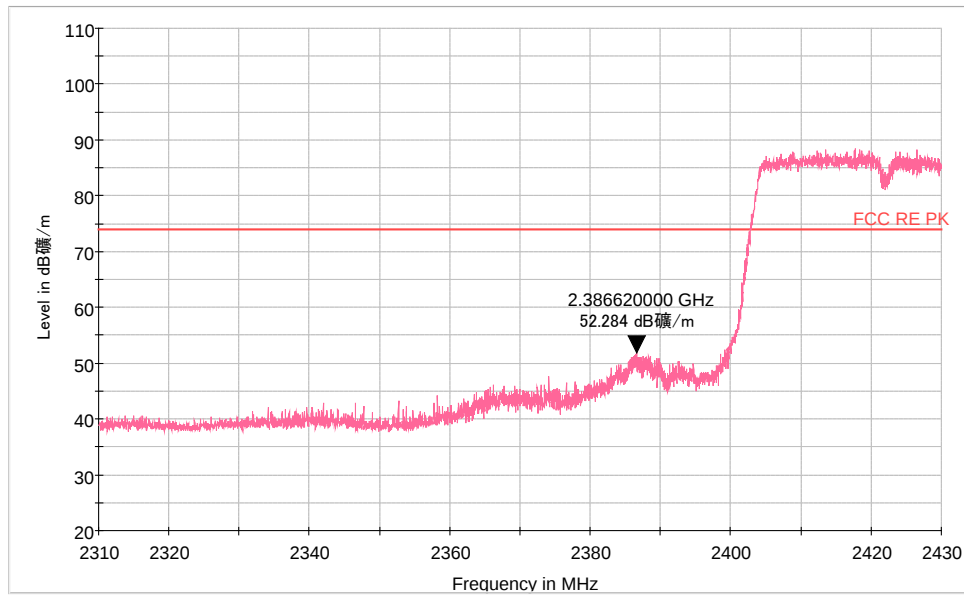

Note: The signal beyond the limit is carrier


## Average

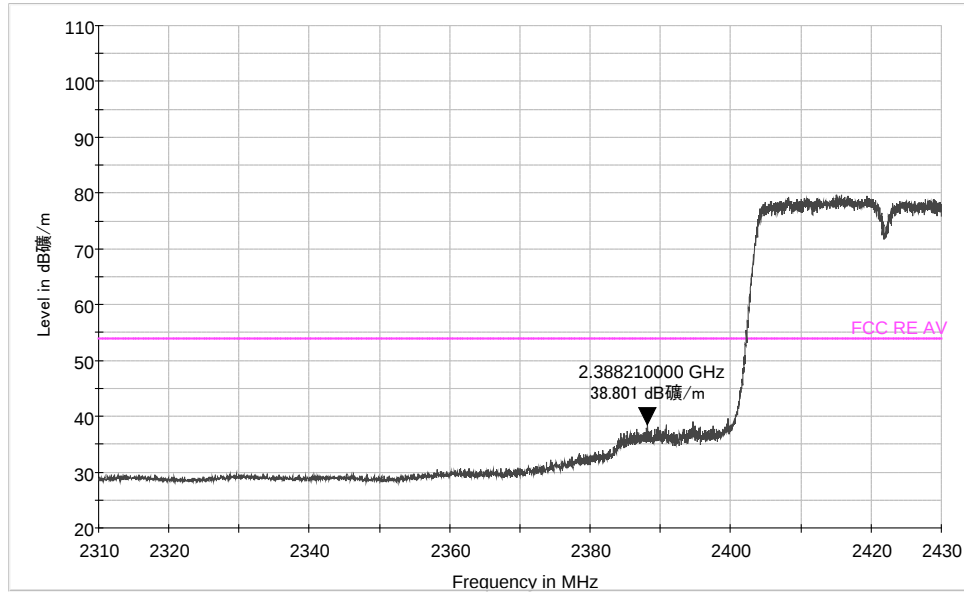

Note: The signal beyond the limit is carrier


802.11n-Channel 9(HT40):

Peak

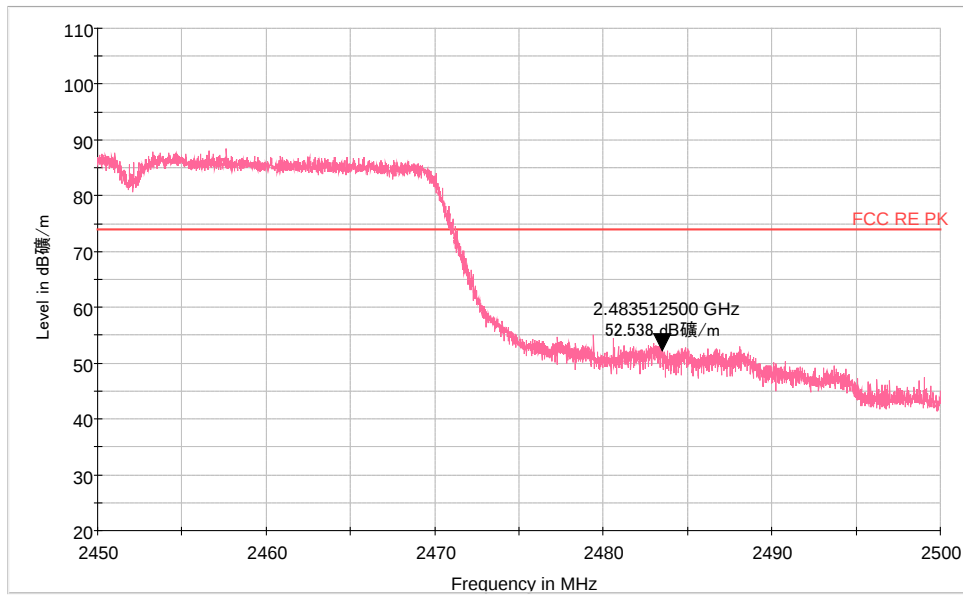

Note: The signal beyond the limit is carrier


Average

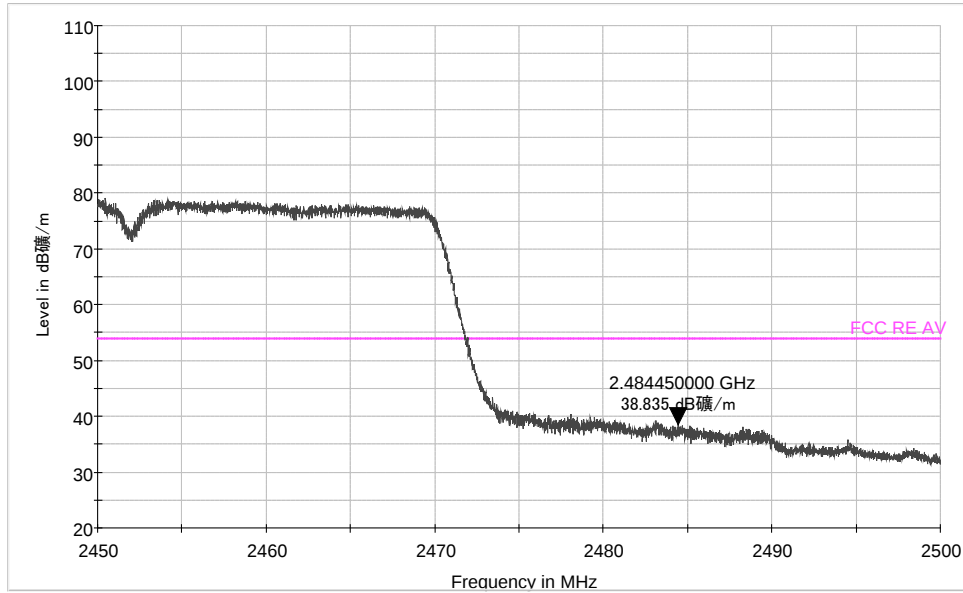

Note: The signal beyond the limit is carrier


**BLE -Channel 0:**

**Peak**

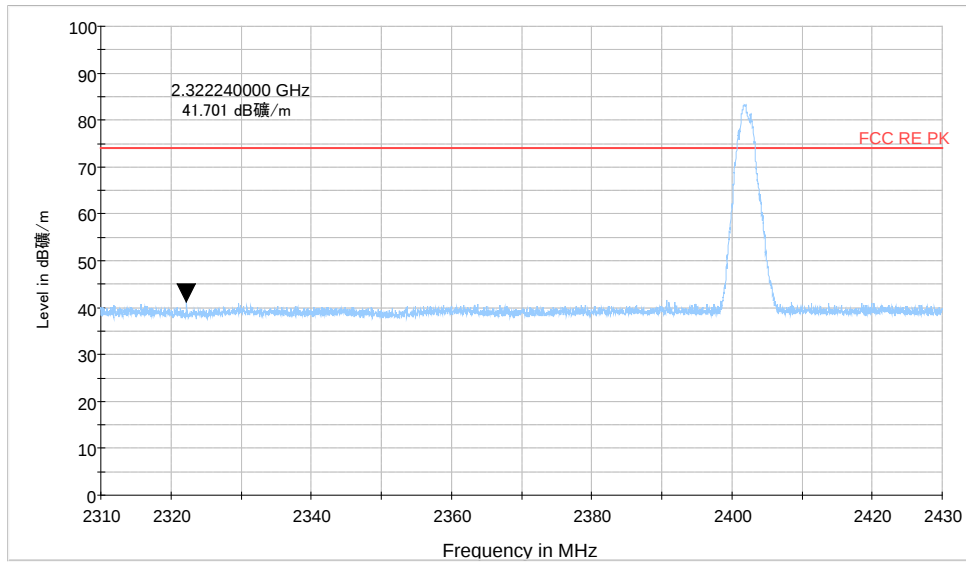

Note: The signal beyond the limit is carrier


**Average**

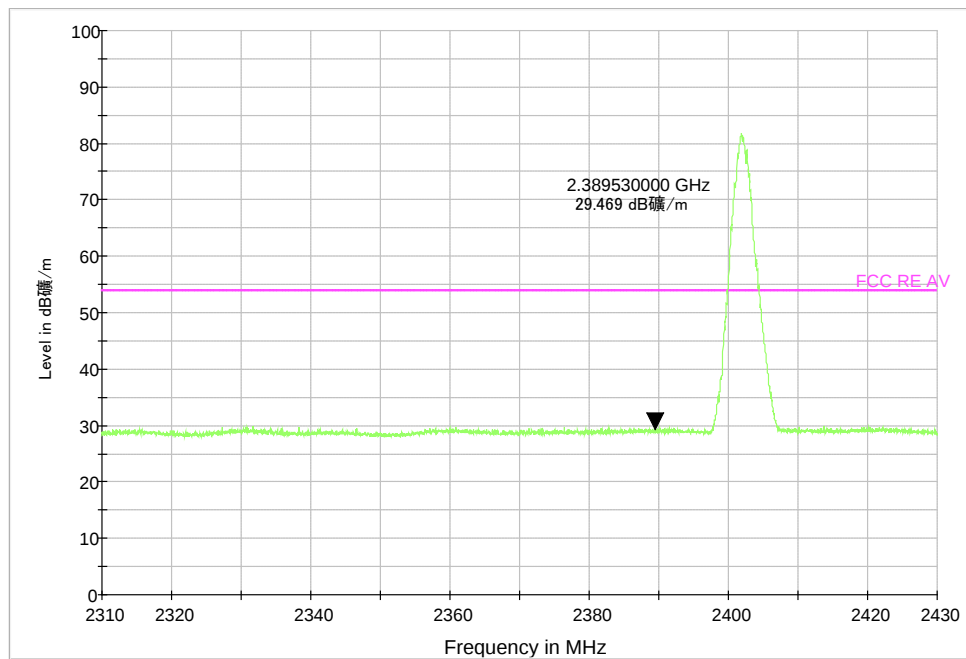

Note: The signal beyond the limit is carrier


**BLE -Channel 39:**

**Peak**

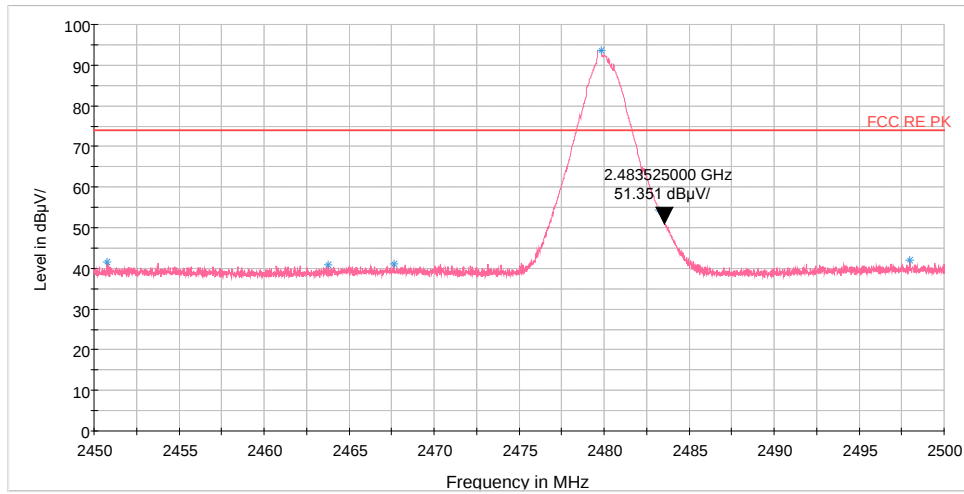

Note: The signal beyond the limit is carrier

**Average**

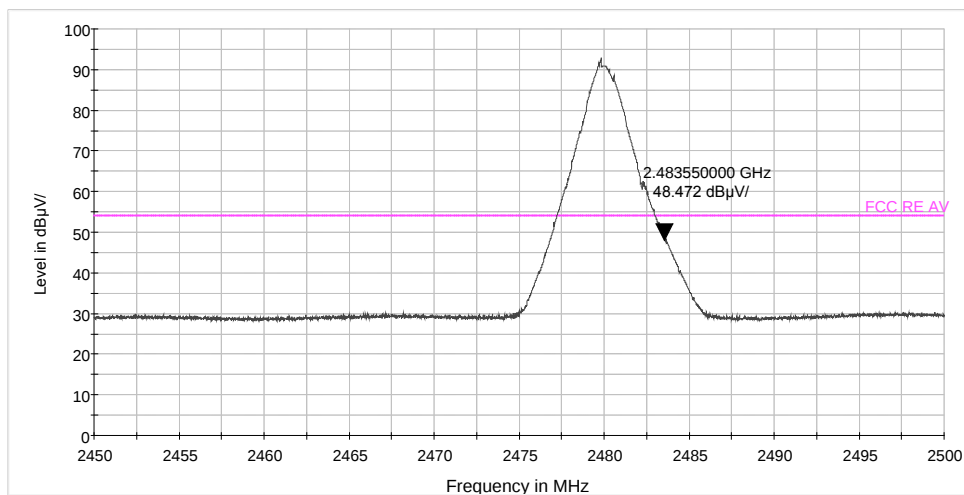

Note: The signal beyond the limit is carrier

## 5.5. Power Spectral Density


### Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |

### Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable. RBW is set to 3 kHz and VBW is set to 10 kHz on spectrum analyzer. Set the span to 1.5 times the DTS channel bandwidth. Sweep time = auto couple. Trace mode = max hold. The peak power spectral density is recorded.

### Test setup



### Limits

Rule Part 15.247(e) specifies that" For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. "

| Limits | $\leq 8 \text{ dBm} / 3\text{kHz}$ |
|--------|------------------------------------|
|--------|------------------------------------|

### Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.75\text{dB}$ .

# Test Results:


| Network Standards         | Channel Number | Power Spectral Density<br>dBm / 3kHz | Conclusion |
|---------------------------|----------------|--------------------------------------|------------|
| 802.11b                   | 1              | -13.111                              | PASS       |
|                           | 6              | -13.198                              | PASS       |
|                           | 11             | -13.126                              | PASS       |
| 802.11g                   | 1              | -13.862                              | PASS       |
|                           | 6              | -13.875                              | PASS       |
|                           | 11             | -13.638                              | PASS       |
| 802.11n<br>HT20           | 1              | -14.148                              | PASS       |
|                           | 6              | -13.893                              | PASS       |
|                           | 11             | -13.921                              | PASS       |
| 802.11n<br>HT40           | 3              | -17.066                              | PASS       |
|                           | 6              | -17.834                              | PASS       |
|                           | 9              | -17.478                              | PASS       |
| Bluetooth<br>(Low Energy) | 0              | -15.673                              | PASS       |
|                           | 19             | -15.718                              | PASS       |
|                           | 39             | -15.612                              | PASS       |




802.11b

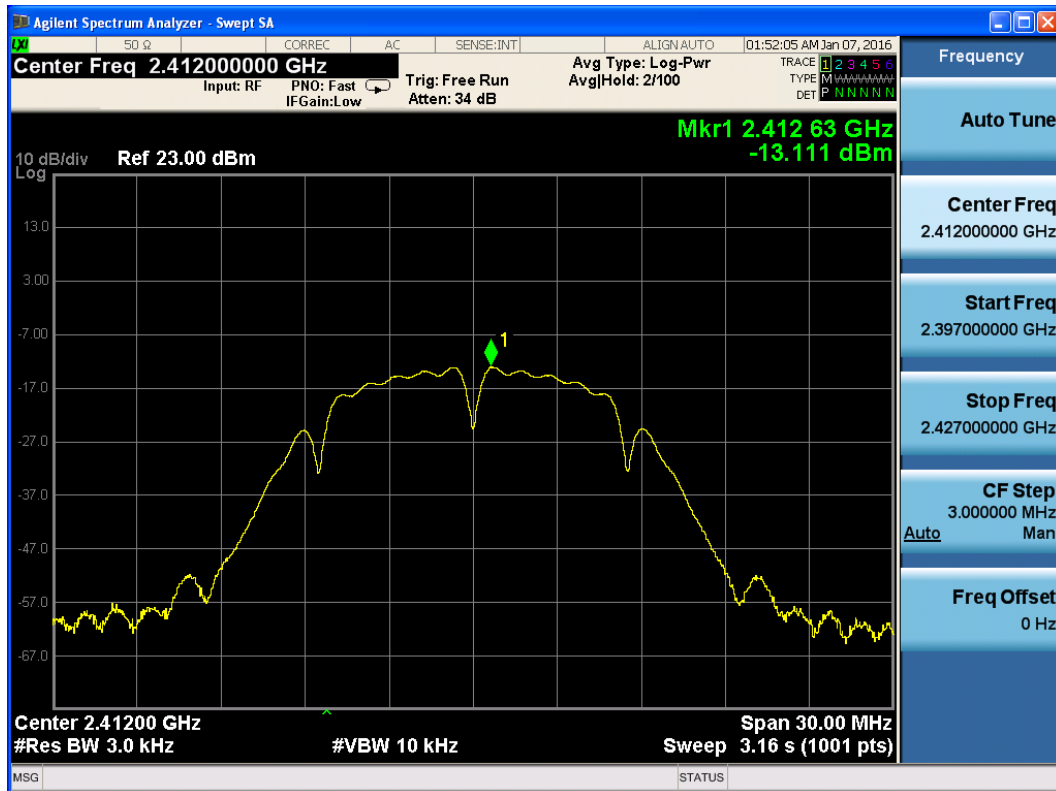

802.11b, Channel No.: 1

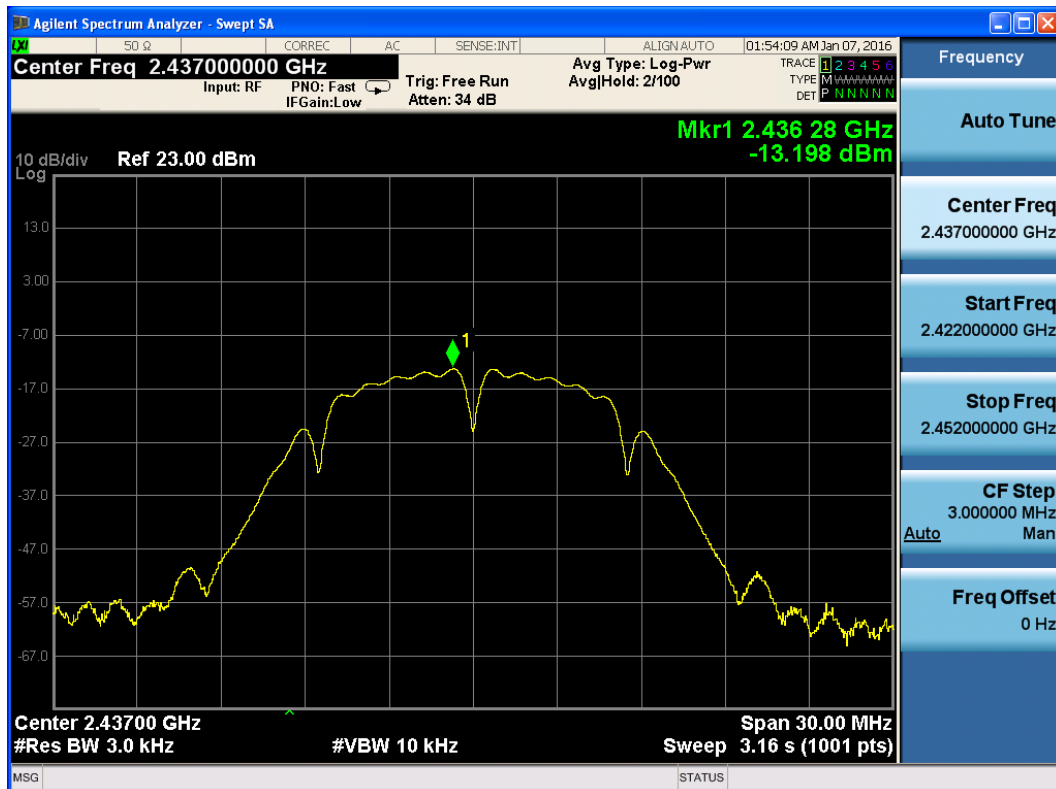


802.11b, Channel No.: 6

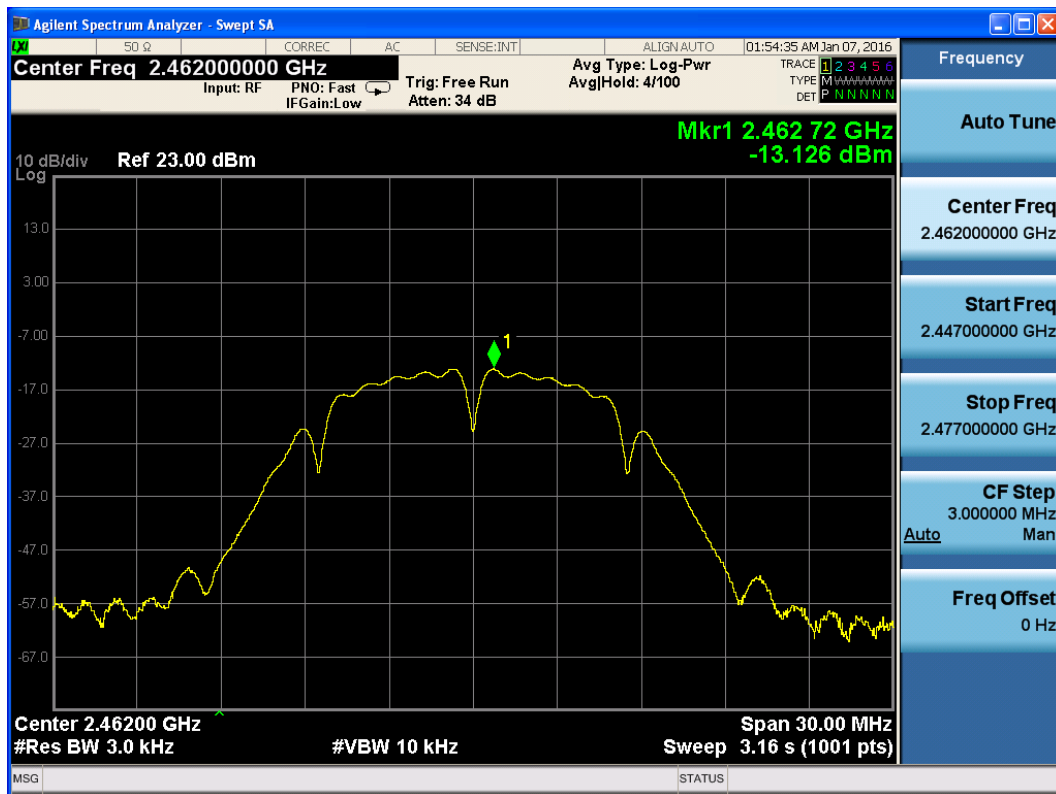


802.11b, Channel No.: 11


802.11g

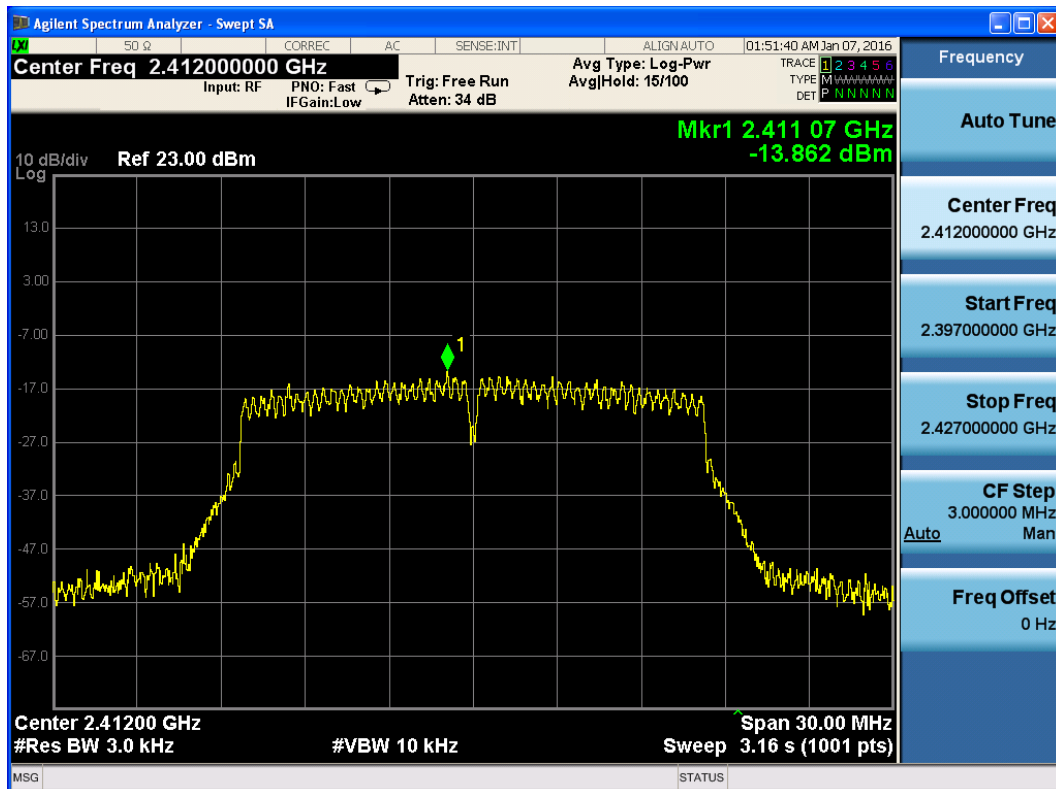

802.11g, Channel No.: 1

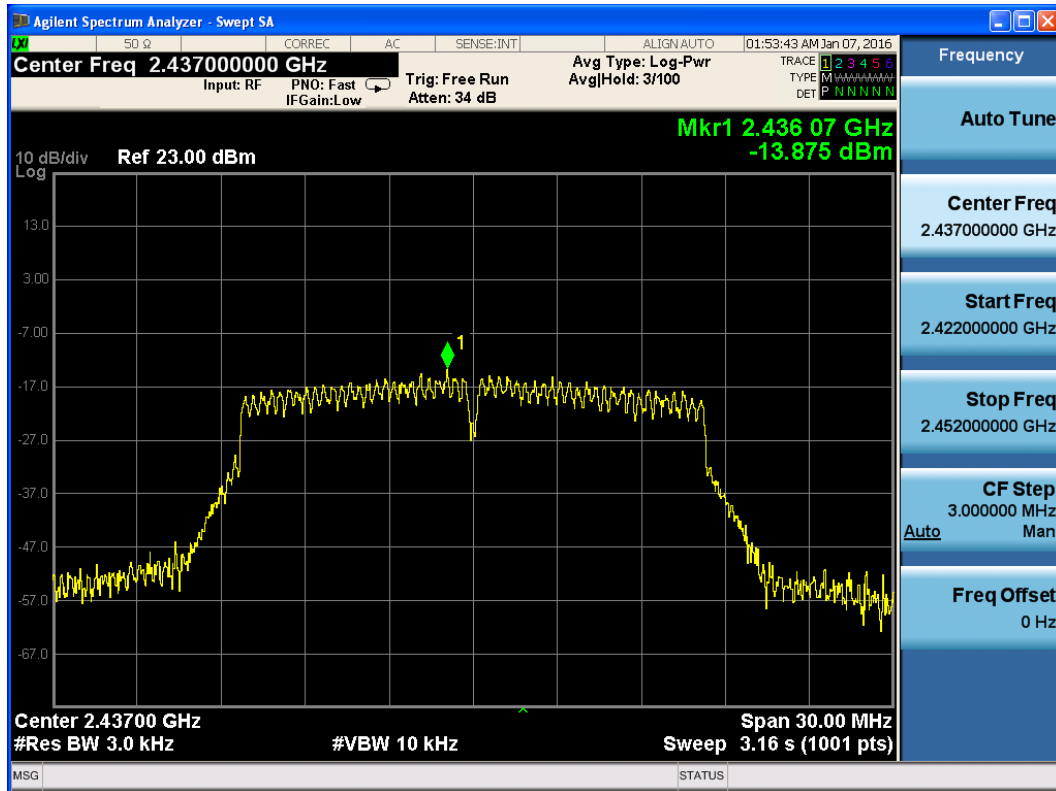


802.11g, Channel No.: 6

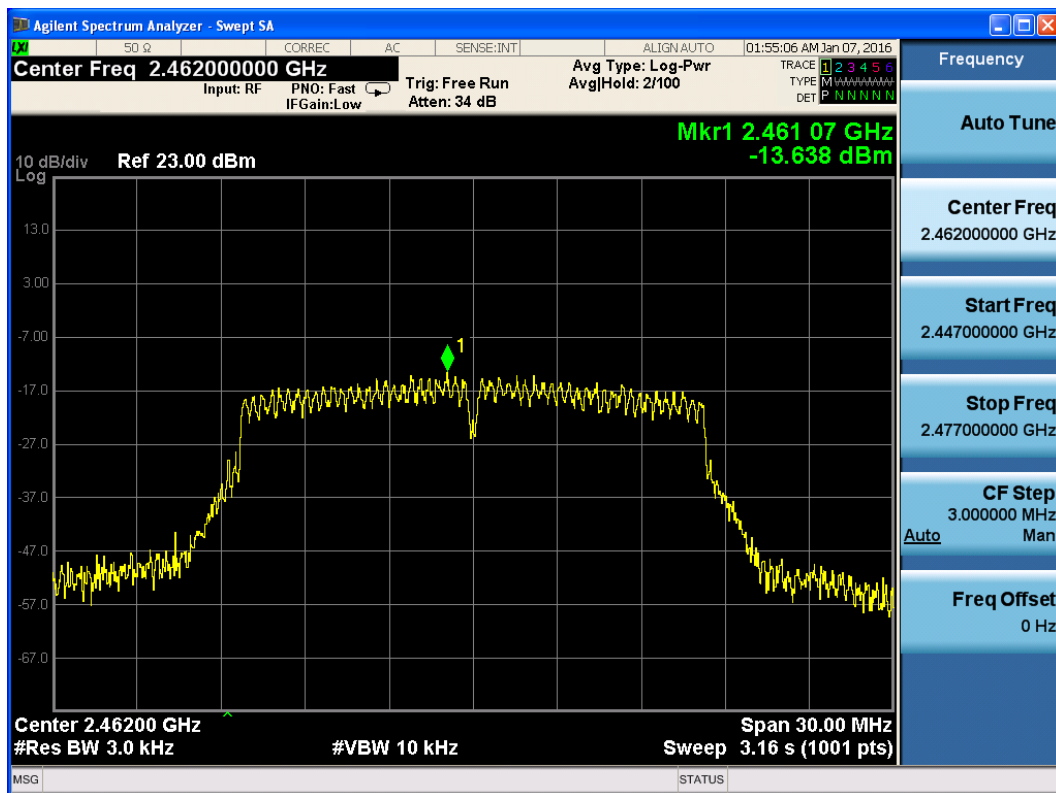


802.11g, Channel No.: 11




802.11n (HT20)

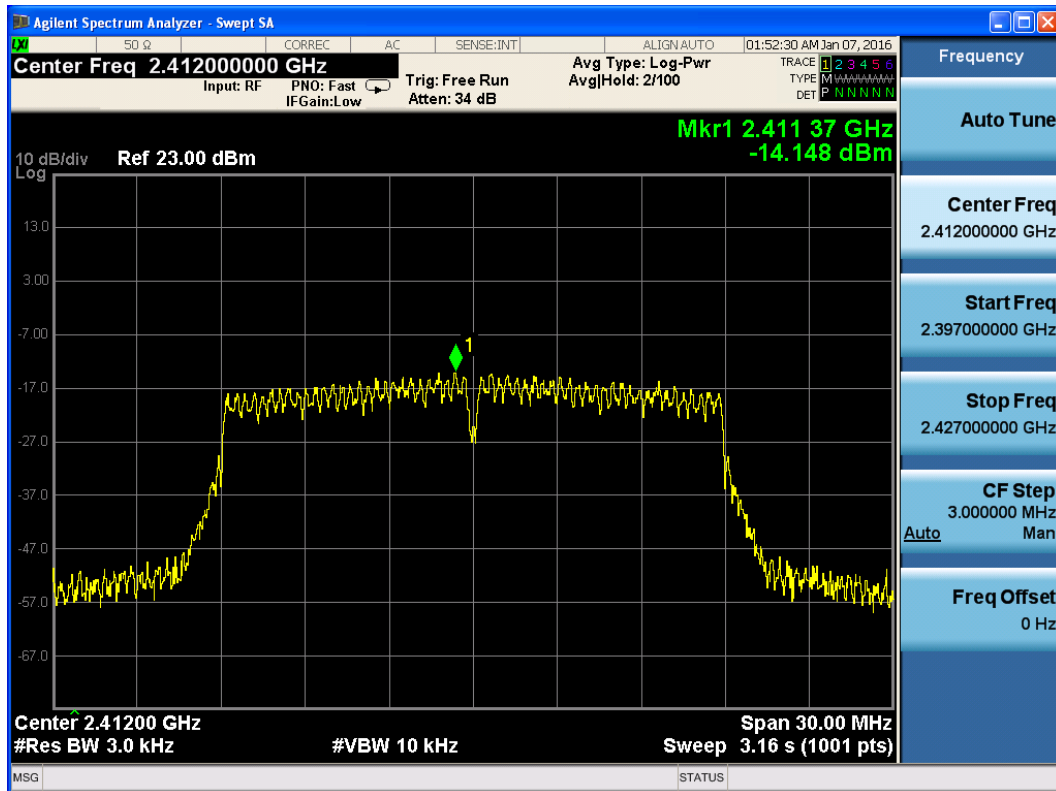

802.11n, Channel No.: 1

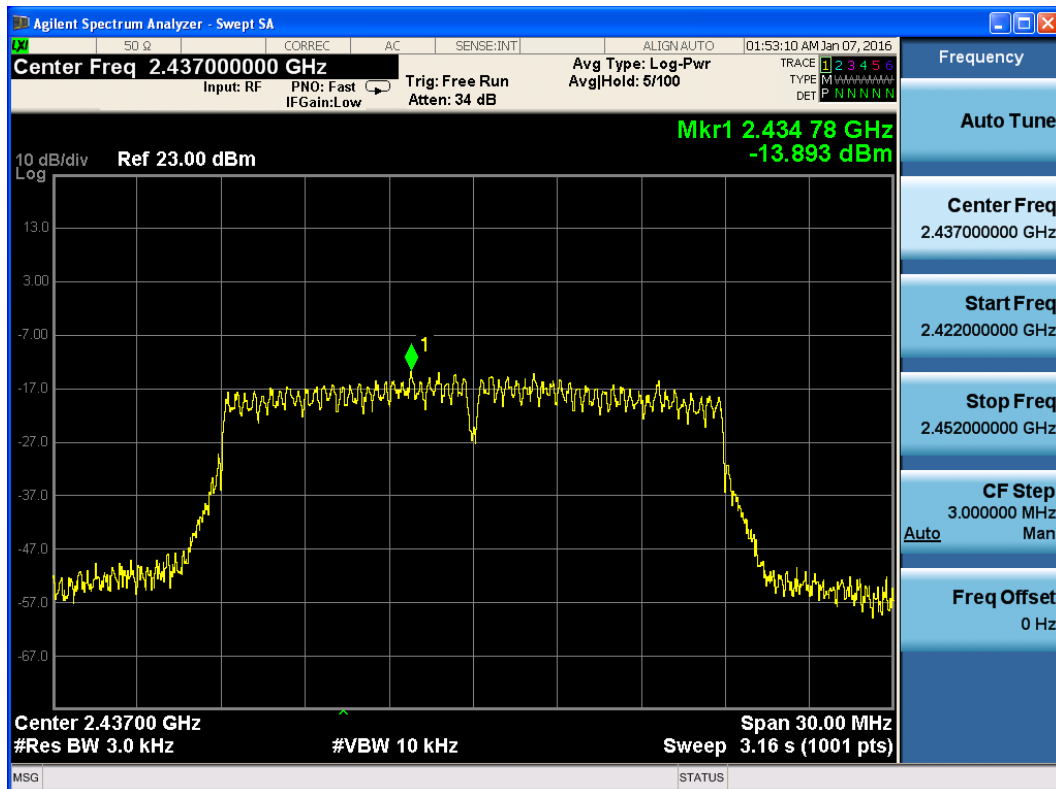


802.11n, Channel No.: 6

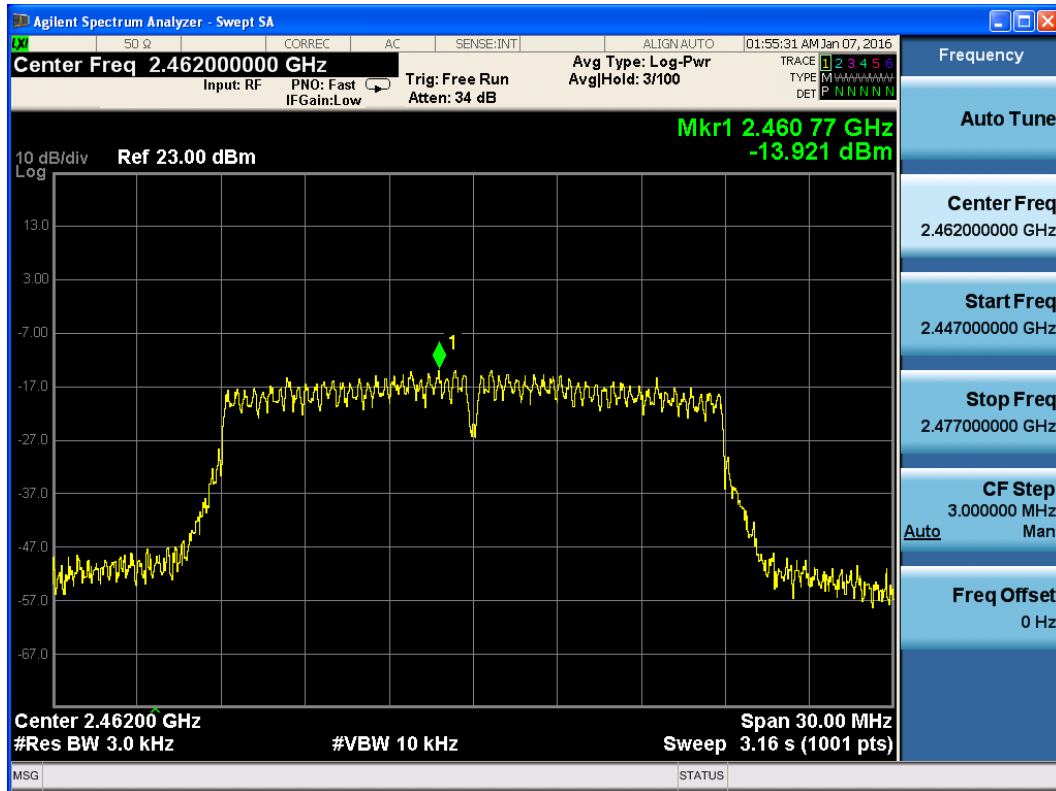


802.11n, Channel No.: 11


802.11n (HT40)

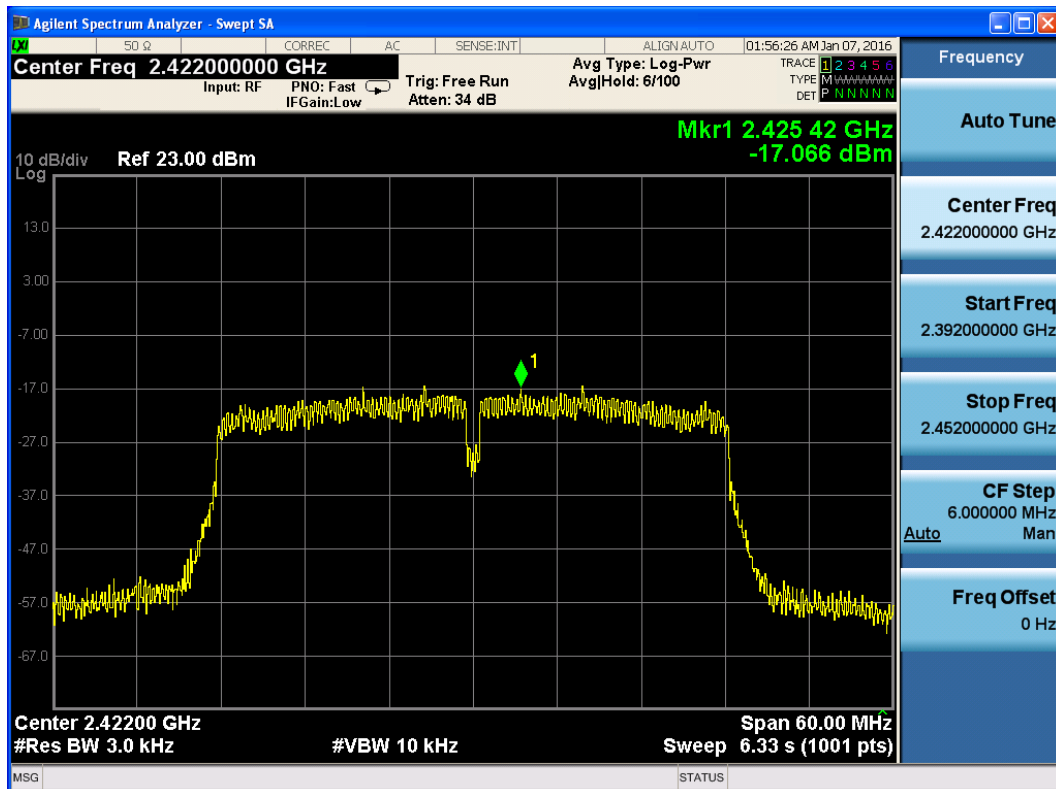

802.11n, Channel No.: 3

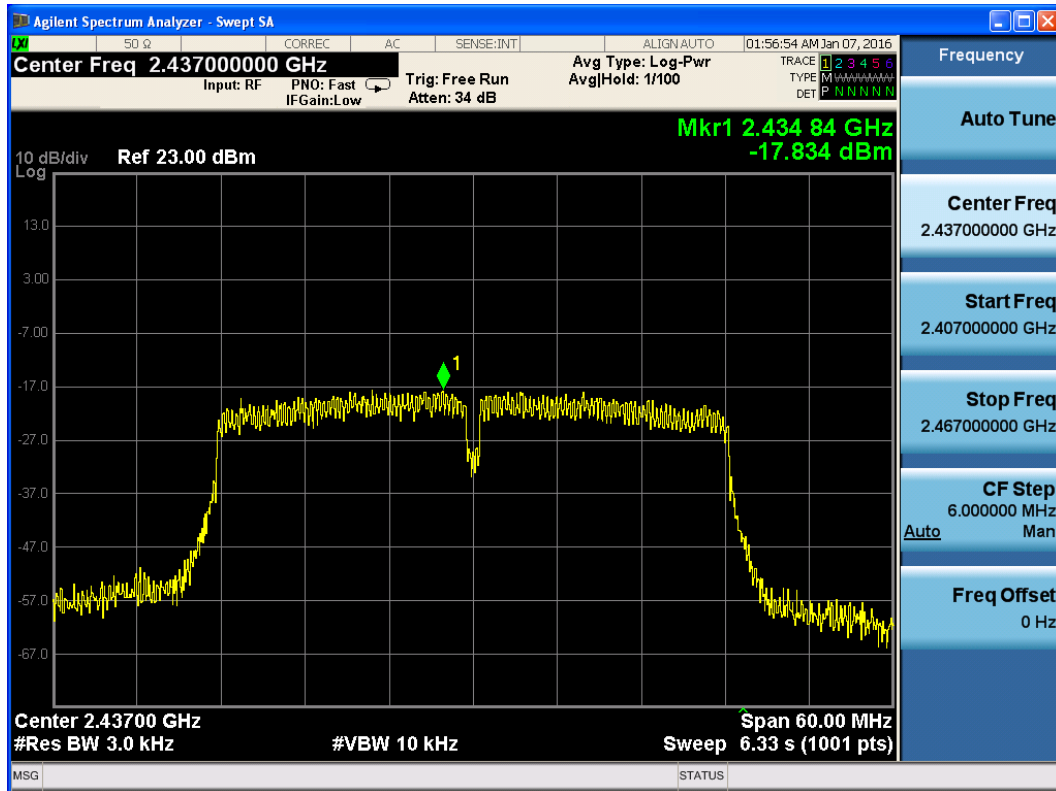


802.11n, Channel No.: 6

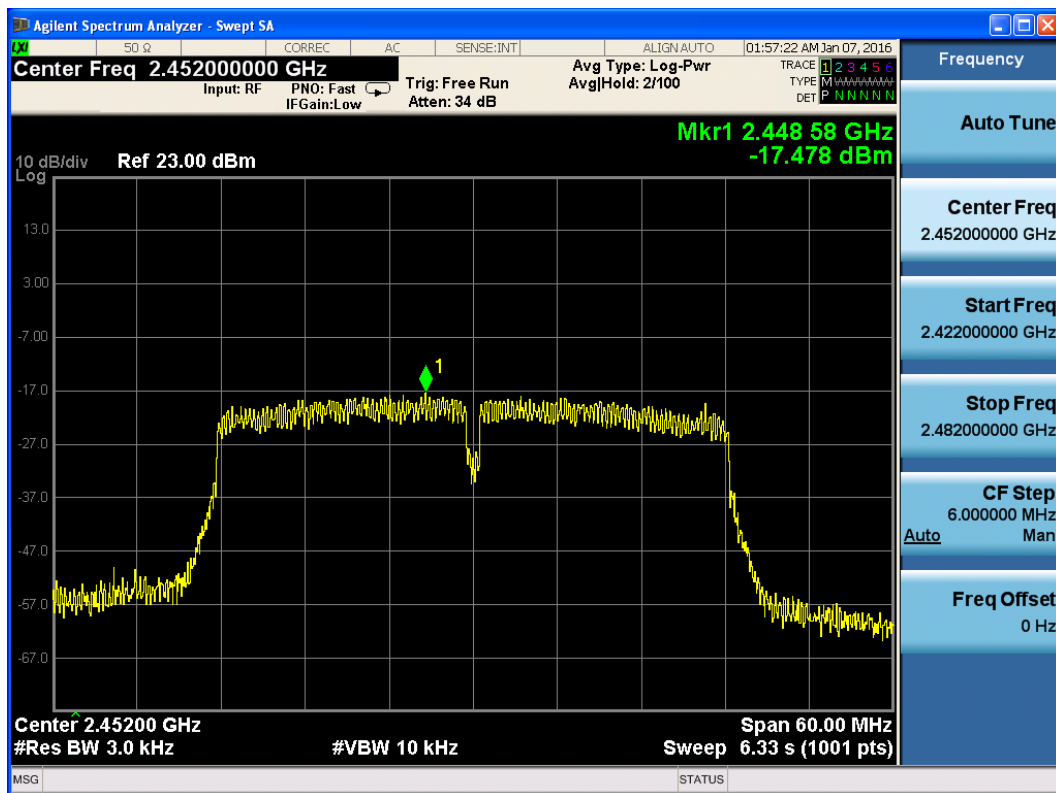


802.11n, Channel No.: 9


BLE

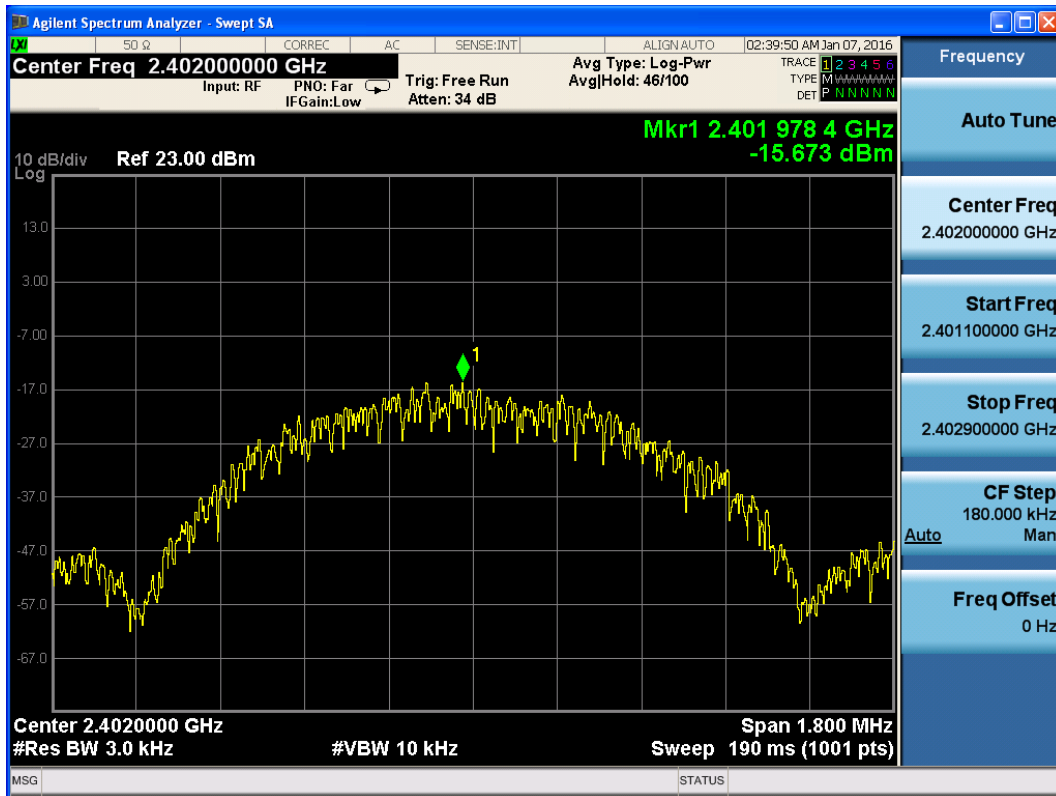

BLE, Channel No.: 0

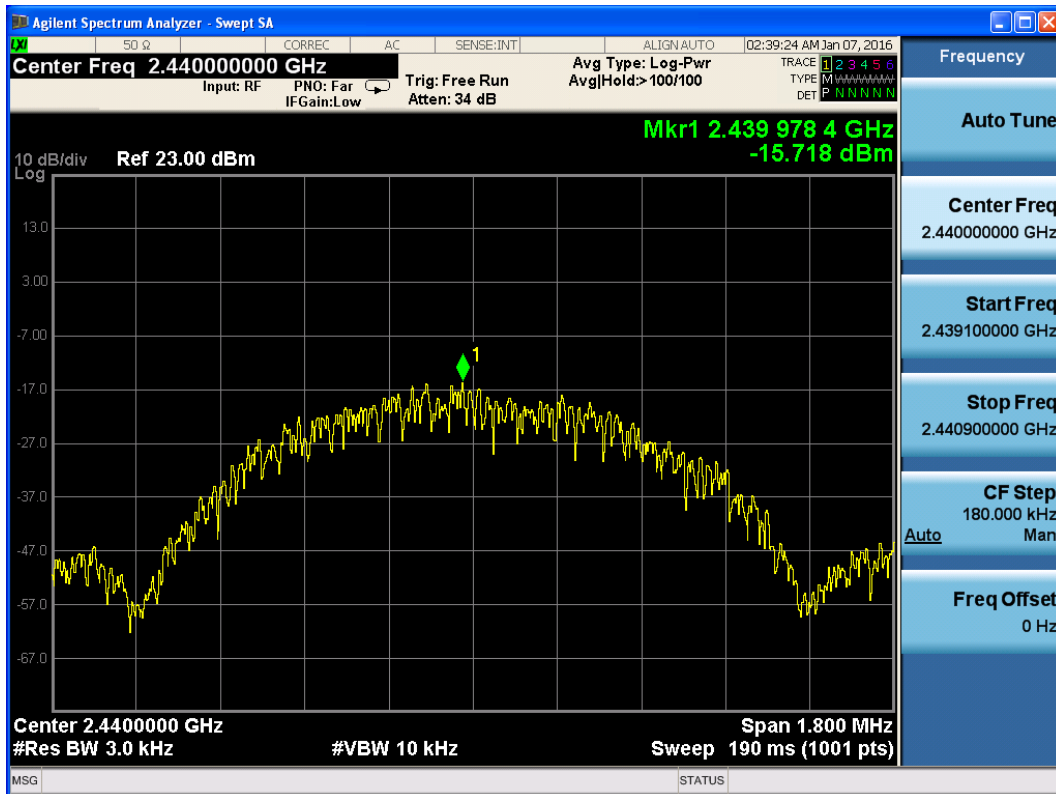

BLE, Channel No.: 19

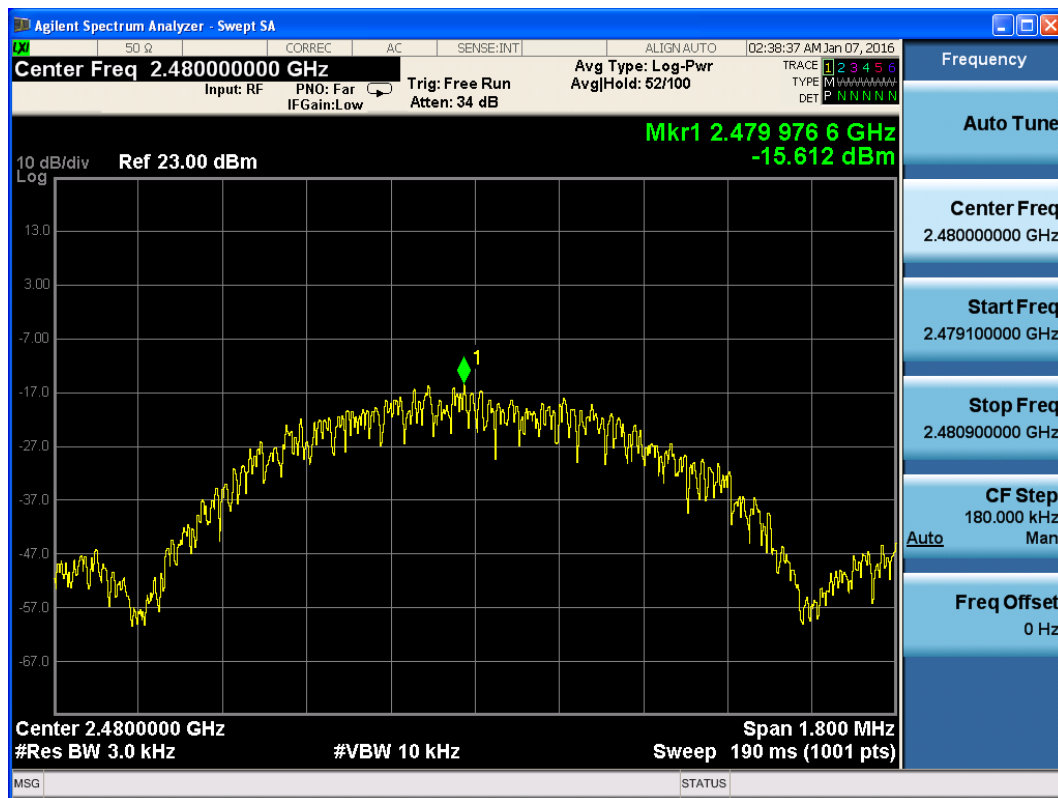

BLE, Channel No.: 39

## 5.6. Spurious RF Conducted Emissions

### Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |

### Method of Measurement

The EUT was connected to the spectrum analyzer and WIFI test set via a power splitter with a known loss. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. RBW and VBW are set to 100 kHz, Sweep is set to ATUO.

The test is in transmitting mode.

### Test setup



### Limits

Rule Part 15.247(d) pacifies that "In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power."

| Network Standards         | Carrier frequency (MHz) | Reference value (dBm) | Limit   |
|---------------------------|-------------------------|-----------------------|---------|
| 802.11b                   | 2412                    | 13.124                | -6.876  |
|                           | 2437                    | 4.904                 | -15.096 |
|                           | 2462                    | 6.663                 | -13.337 |
| 802.11g                   | 2412                    | 4.624                 | -15.376 |
|                           | 2437                    | -0.792                | -20.792 |
|                           | 2462                    | 1.699                 | -18.301 |
| 802.11n<br>HT20           | 2412                    | 5.072                 | -14.928 |
|                           | 2437                    | -1.364                | -21.364 |
|                           | 2462                    | 1.496                 | -18.504 |
| 802.11n<br>HT40           | 2422                    | -1.725                | -21.725 |
|                           | 2437                    | -1.283                | -21.283 |
|                           | 2452                    | -3.724                | -23.724 |
| Bluetooth<br>(Low Energy) | 2402                    | 12.286                | -7.714  |
|                           | 2440                    | 0.59                  | -19.41  |
|                           | 2480                    | 0.825                 | -19.175 |

### Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .

| Frequency    | Uncertainty |
|--------------|-------------|
| 100kHz-2GHz  | 0.684 dB    |
| 2GHz-26.5GHz | 1.407 dB    |

## Test Results:


If disturbances were found more than 20dB below limit line, the mark is not required for the EUT.

### 802.11b CH1

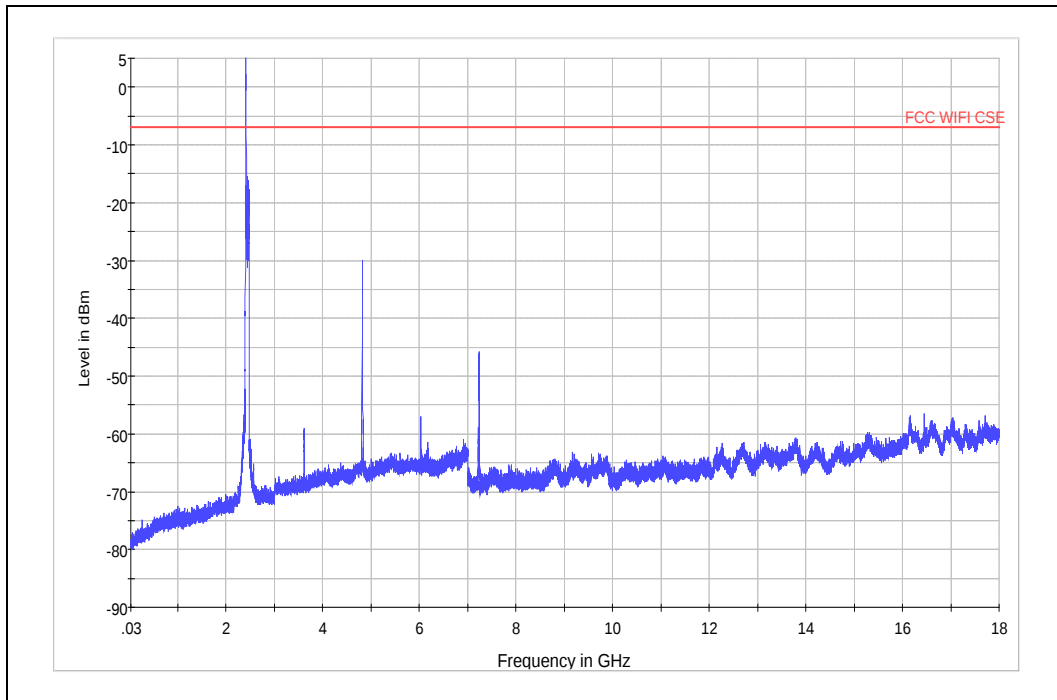


Note: The signal beyond the limit is carrier

Spurious RF conducted emissions from 30MHz to 18GHz

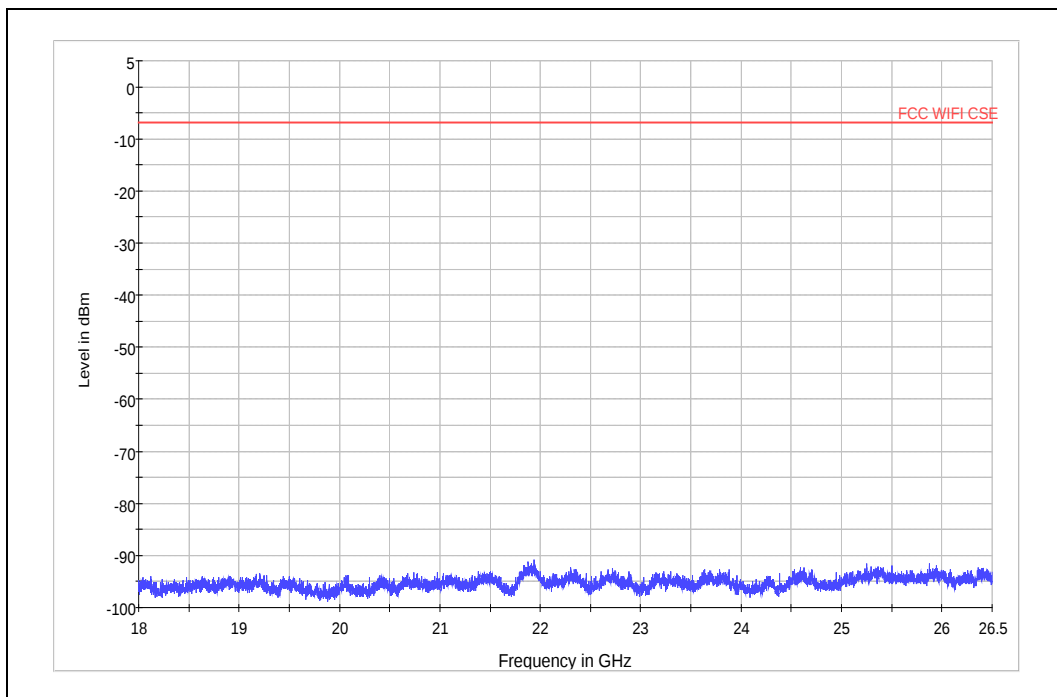

Spurious RF conducted emissions from 18GHz to 26.5GHz


802.11b CH6

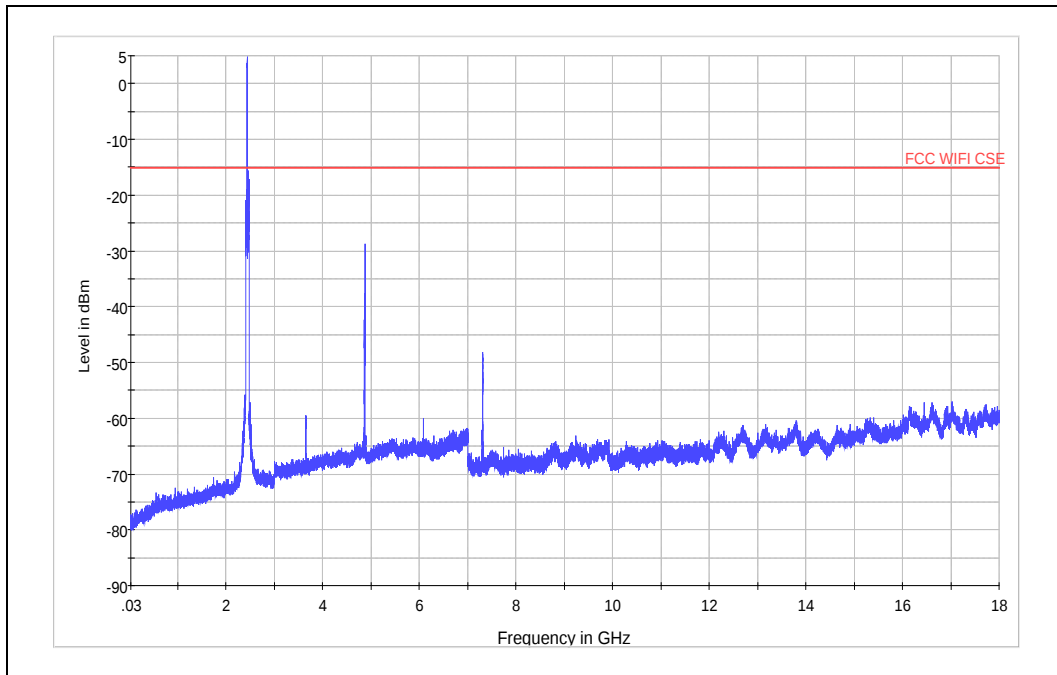

Note: The signal beyond the limit is carrier


Spurious RF conducted emissions from 30MHz to 18GHz

| Harmonic | Frequency (MHz) | Level (dBm) | Limit (dBm) | Margin (dB) |
|----------|-----------------|-------------|-------------|-------------|
| 2        | 4874.3          | -28.69      | -15.096     | 13.59       |

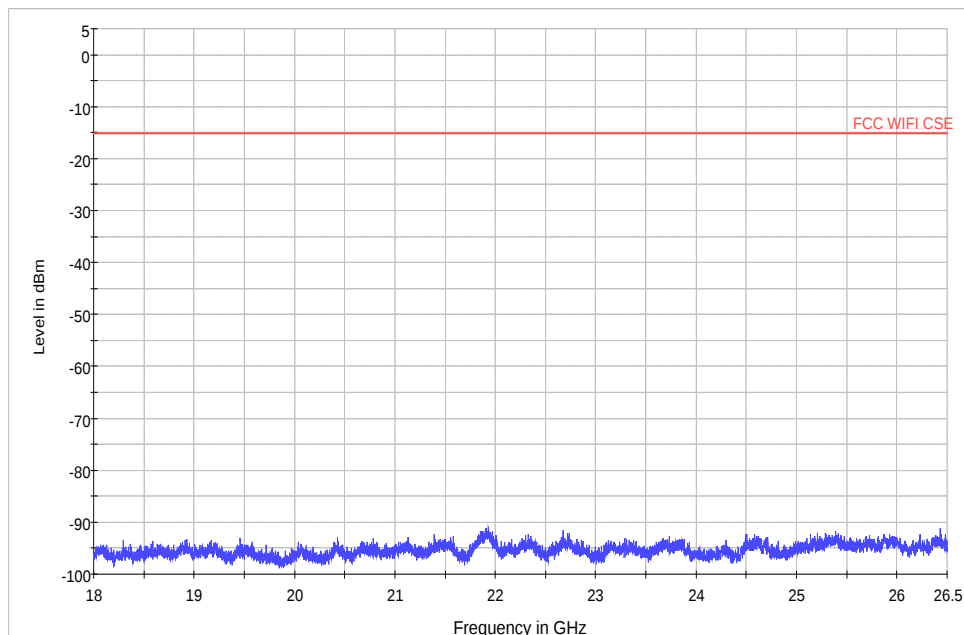

Spurious RF conducted emissions from 18GHz to 26.5GHz


802.11b CH11

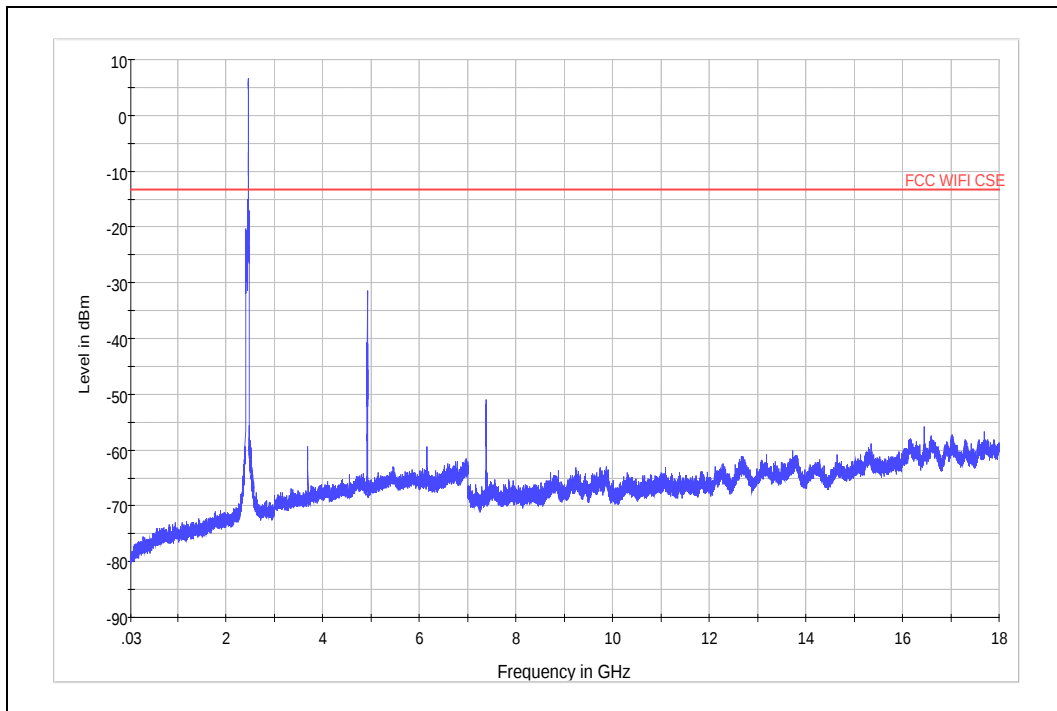

Note: The signal beyond the limit is carrier


Spurious RF conducted emissions from 30MHz to 18GHz

| Harmonic | Frequency (MHz) | Level (dBm) | Limit (dBm) | Margin (dB) |
|----------|-----------------|-------------|-------------|-------------|
| 2        | 4923.8          | -31.48      | -13.337     | 18.14       |

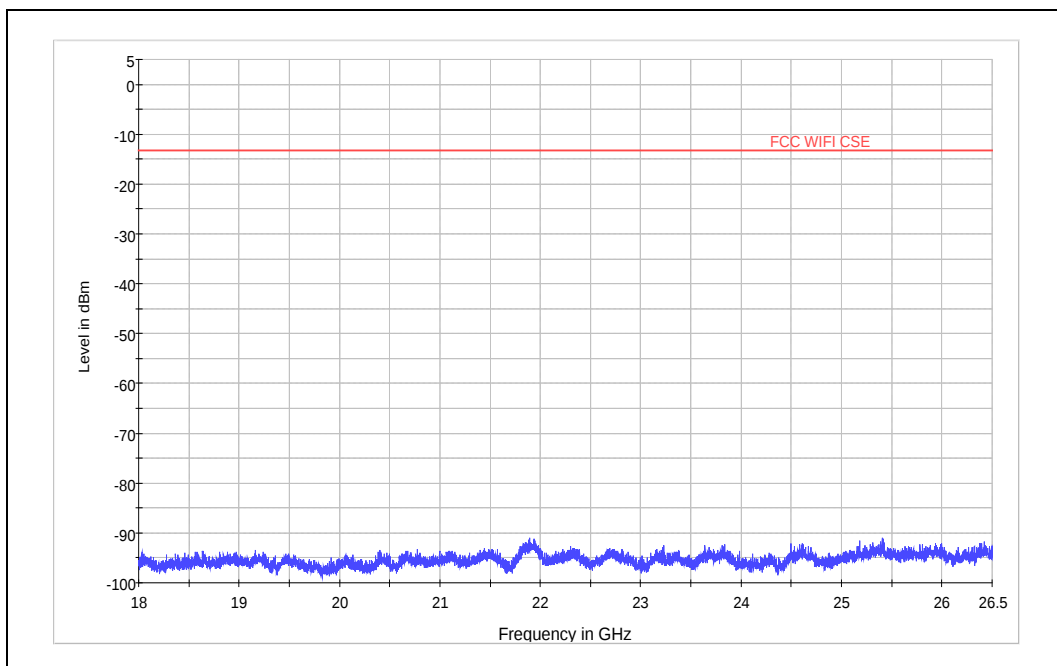


Spurious RF conducted emissions from 18GHz to 26.5GHz

## 802.11g CH1

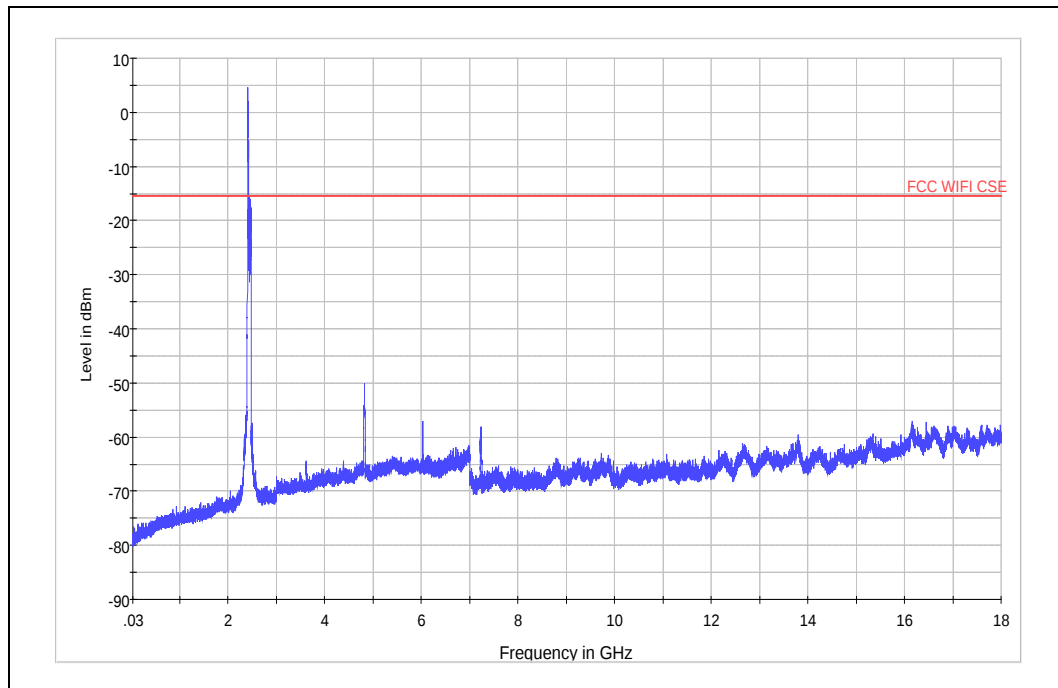


Note: The signal beyond the limit is carrier

Spurious RF conducted emissions from 30MHz to 18GHz

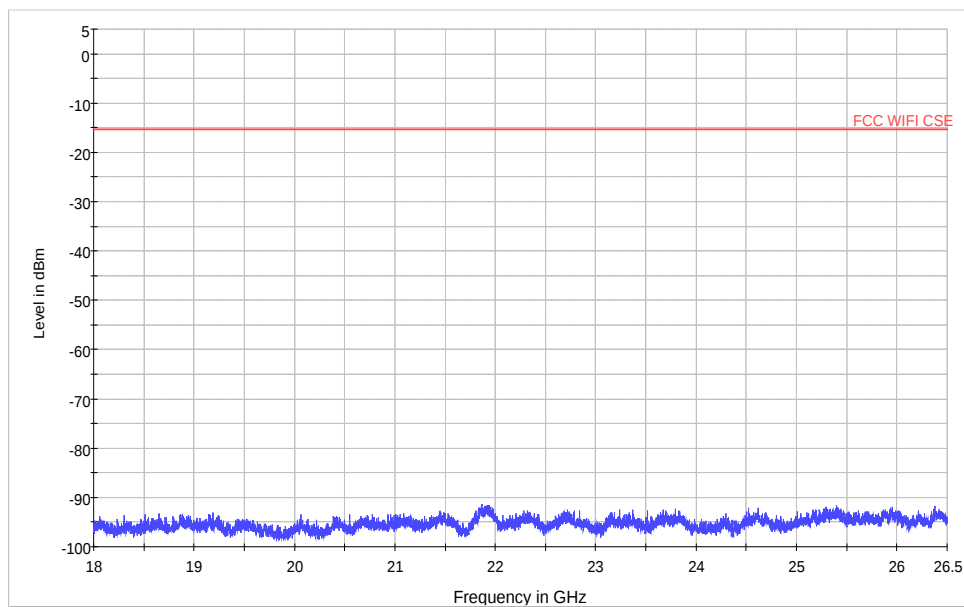


Spurious RF conducted emissions from 18GHz to 26.5GHz

802.11g CH6

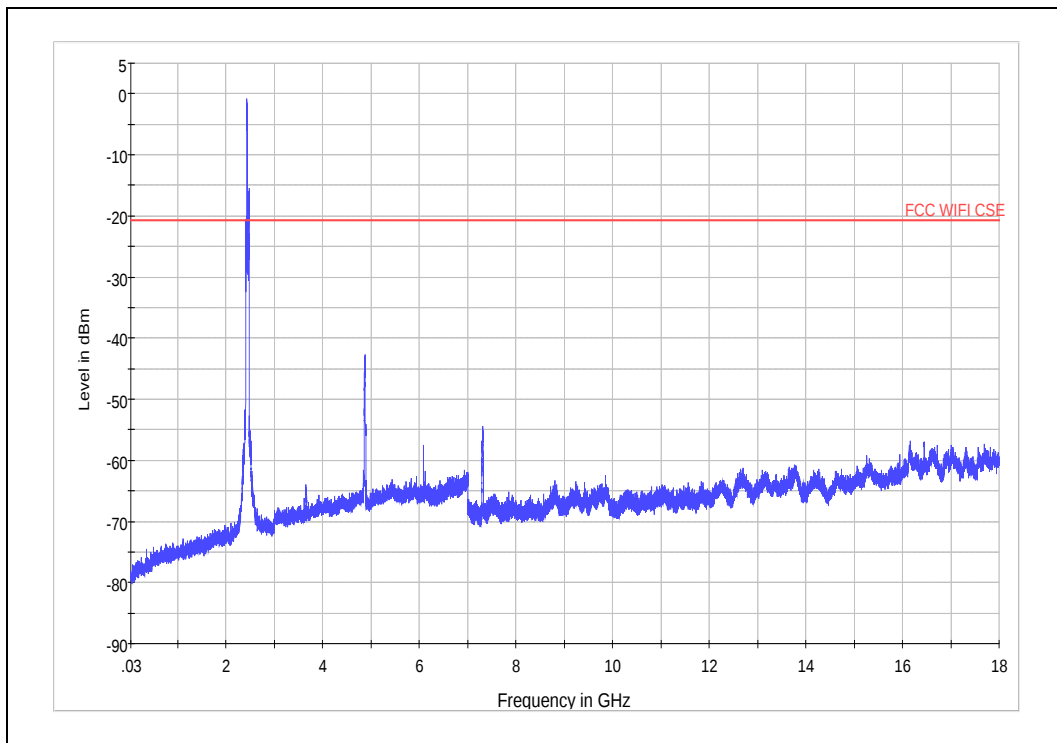


Note: The signal beyond the limit is carrier

Spurious RF conducted emissions from 30MHz to 18GHz

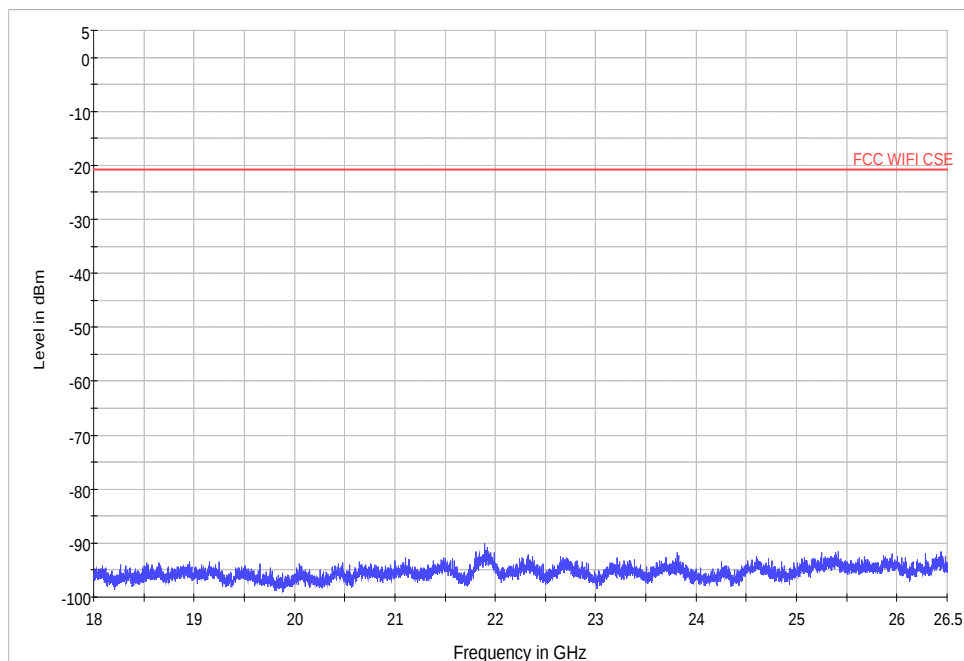


Spurious RF conducted emissions from 18GHz to 26.5GHz

802.11g CH11

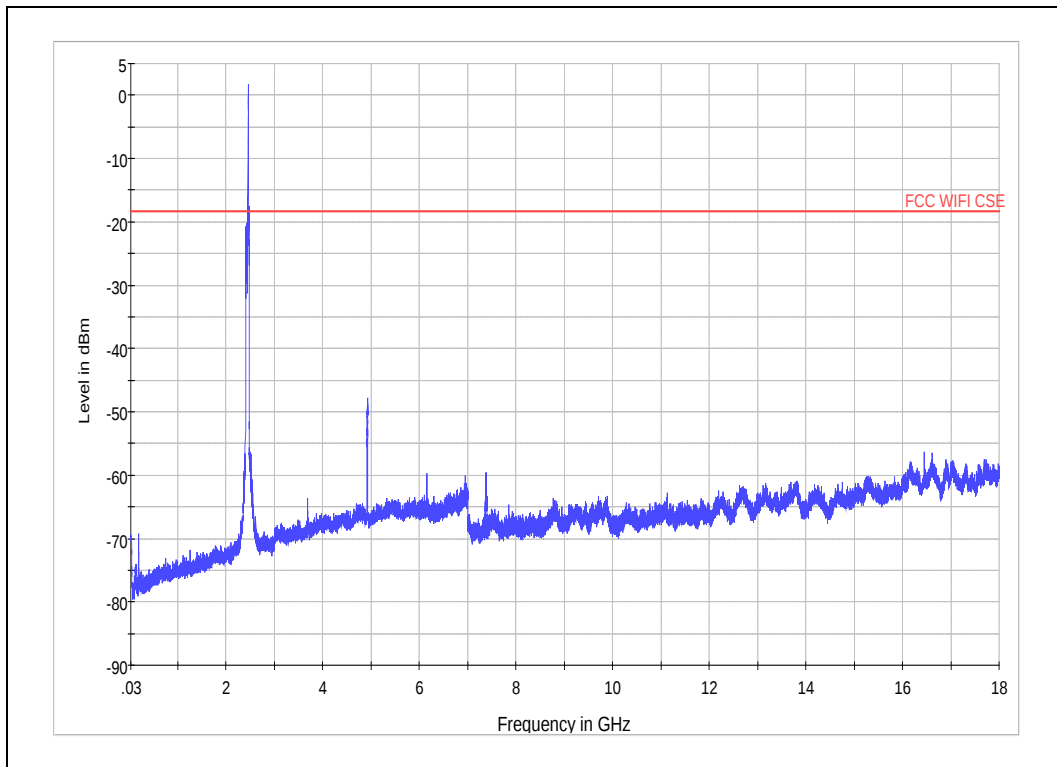


Note: The signal beyond the limit is carrier

Spurious RF conducted emissions from 30MHz to 18GHz

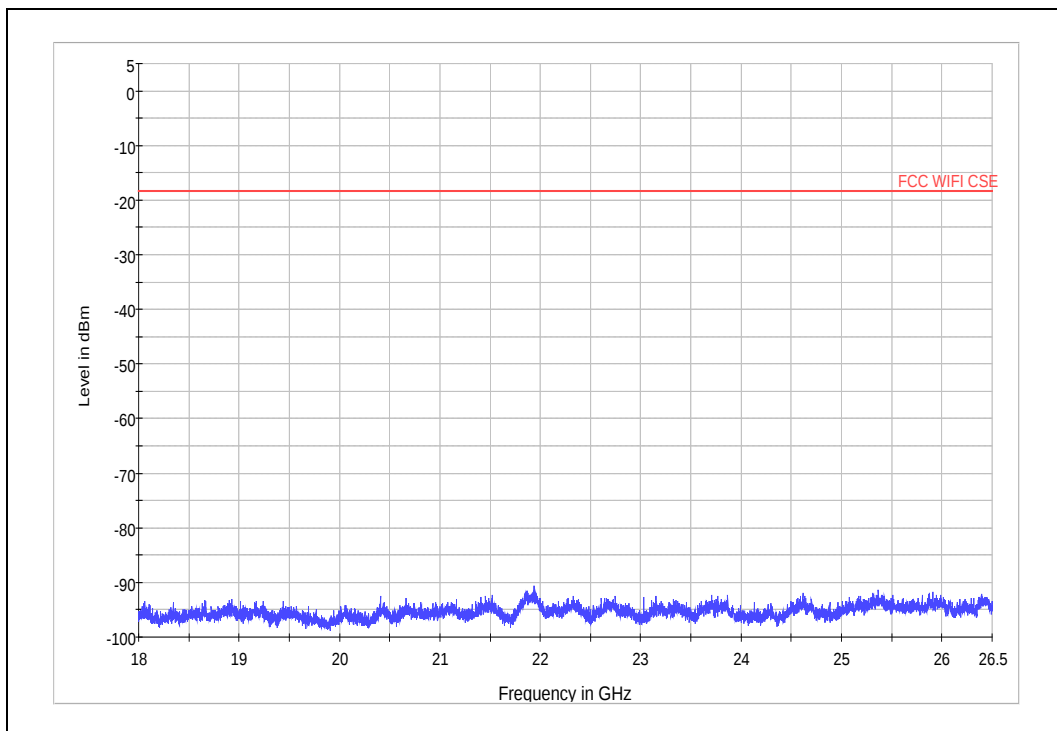


Spurious RF conducted emissions from 18GHz to 26.5GHz

802.11n (HT20) CH1

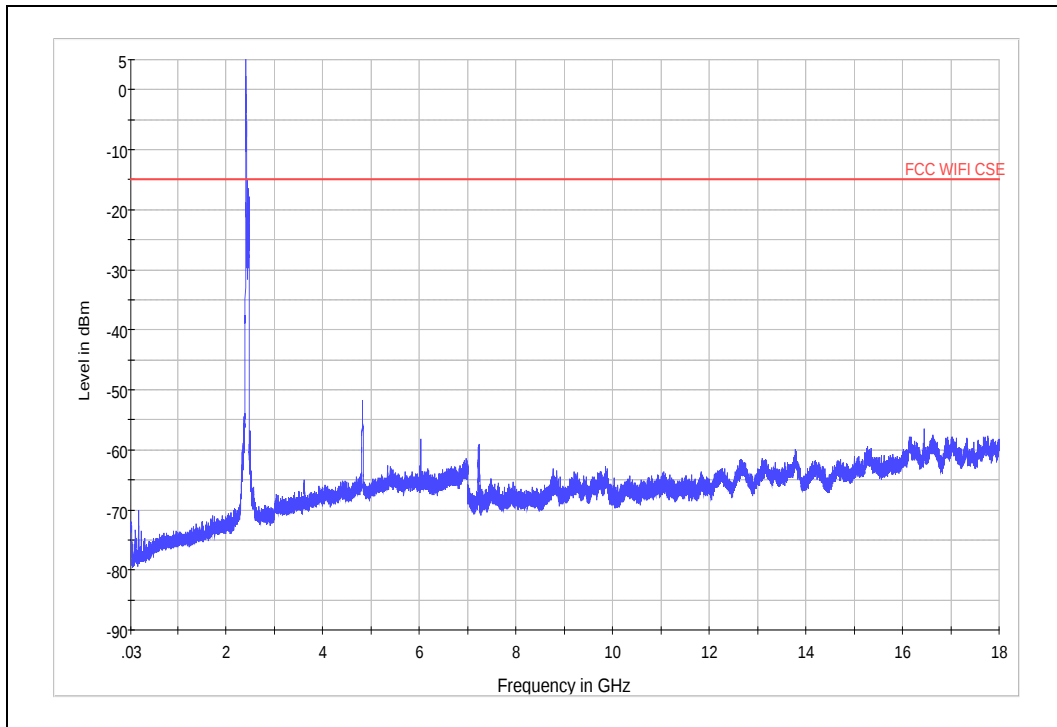


Note: The signal beyond the limit is carrier

Spurious RF conducted emissions from 30MHz to 18GHz

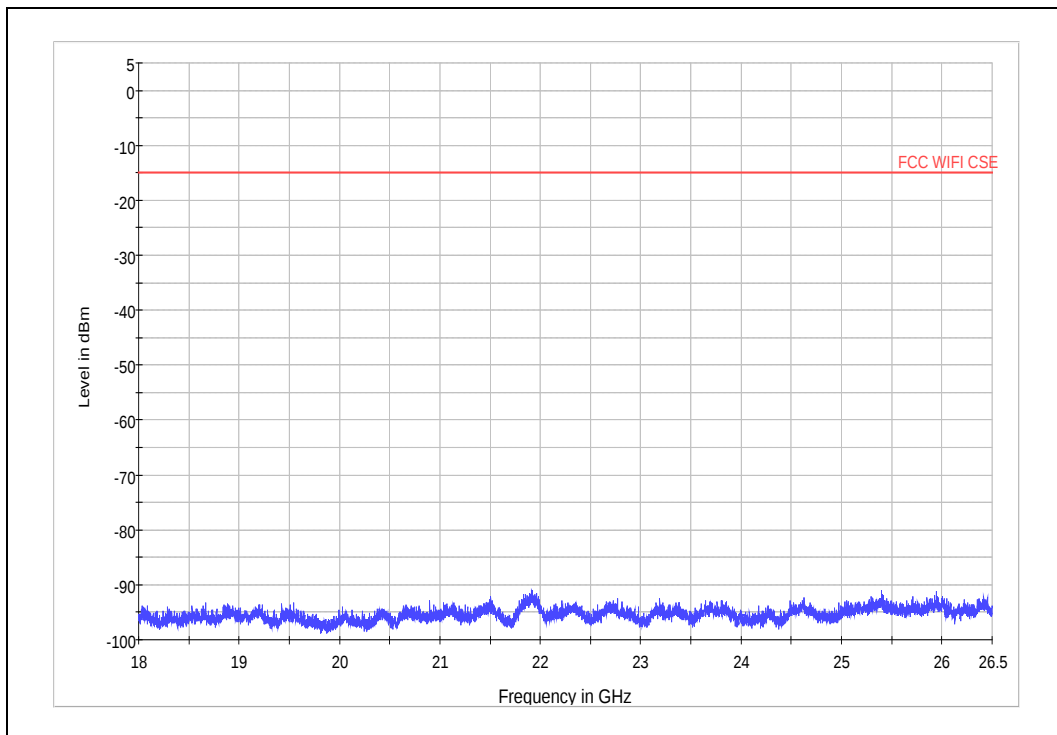


Spurious RF conducted emissions from 18GHz to 26.5GHz

802.11n (HT20) CH6

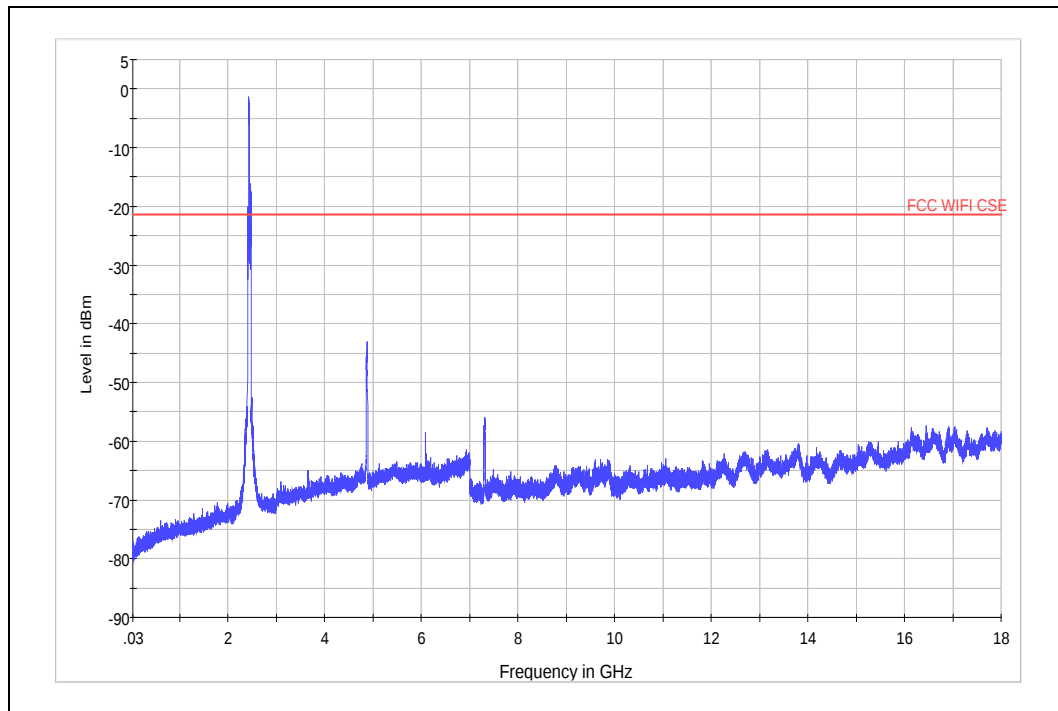


Note: The signal beyond the limit is carrier

Spurious RF conducted emissions from 30MHz to 18GHz

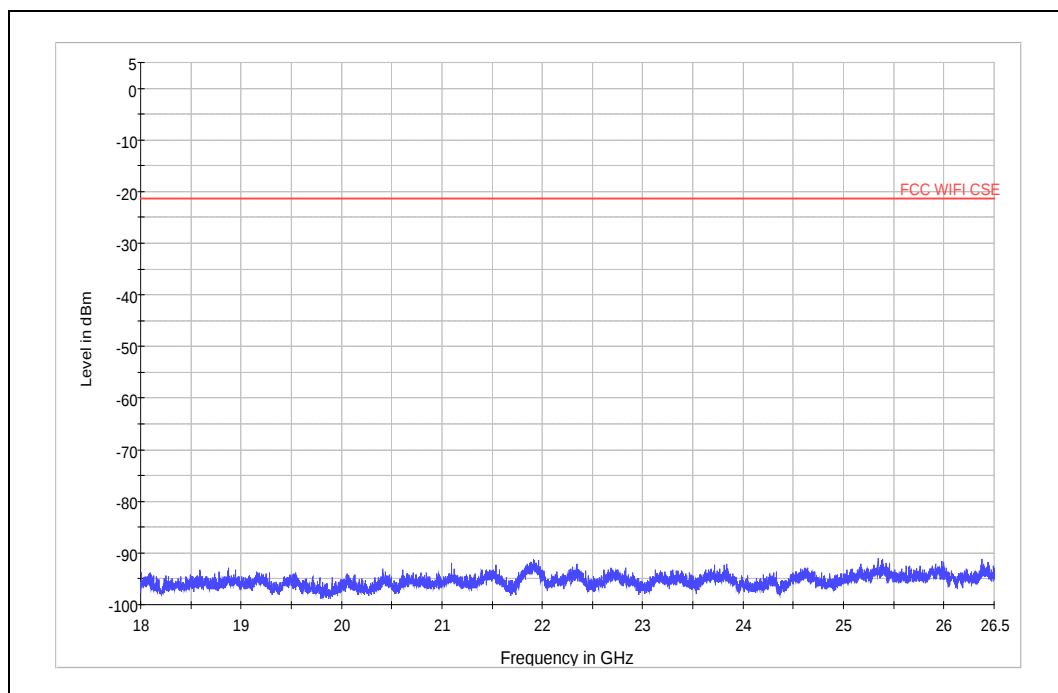


Spurious RF conducted emissions from 18GHz to 26.5GHz

802.11n (HT20) CH11

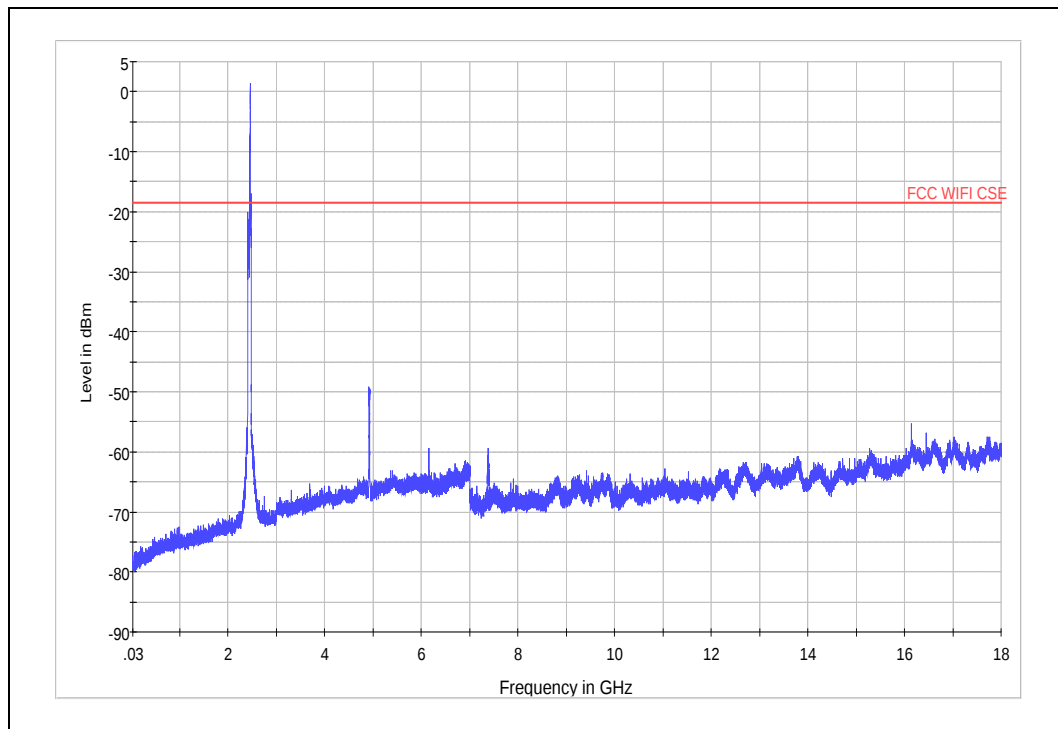


Note: The signal beyond the limit is carrier

Spurious RF conducted emissions from 30MHz to 18GHz

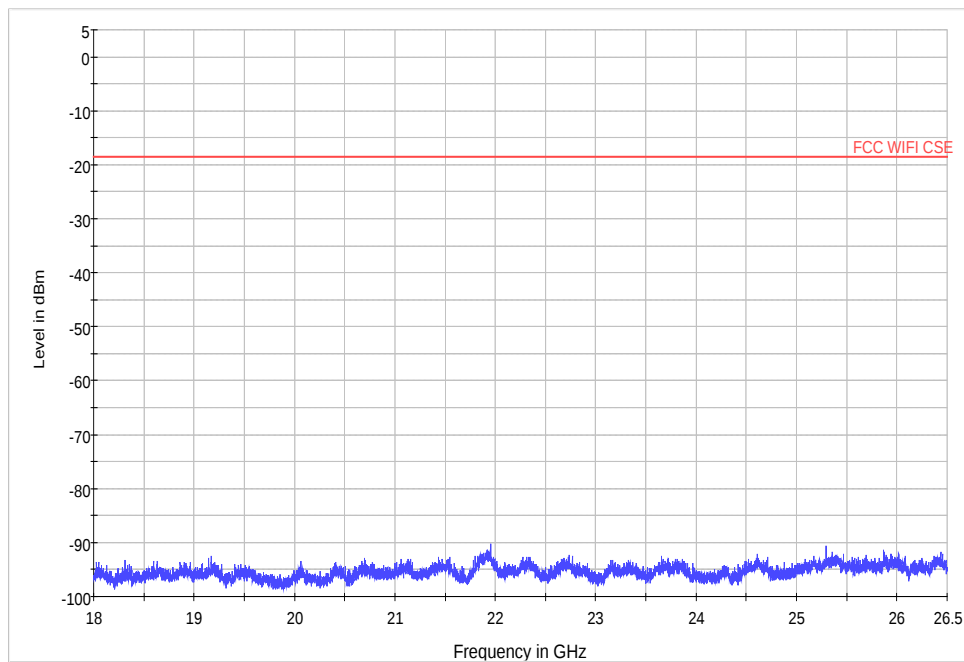


Spurious RF conducted emissions from 18GHz to 26.5GHz

802.11n (HT40) CH3

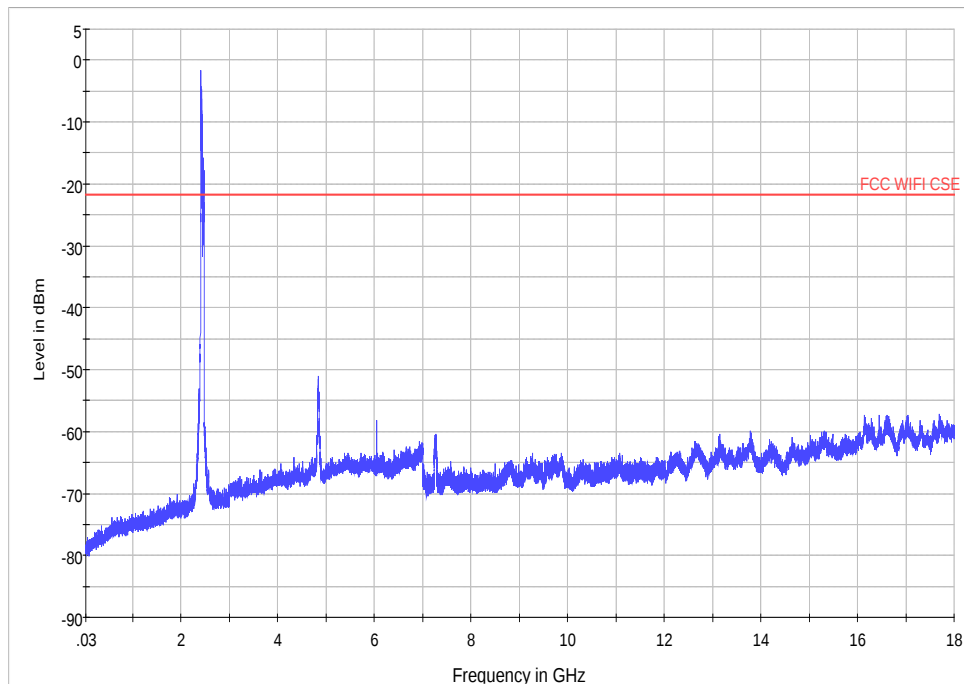


Note: The signal beyond the limit is carrier

Spurious RF conducted emissions from 30MHz to 18GHz

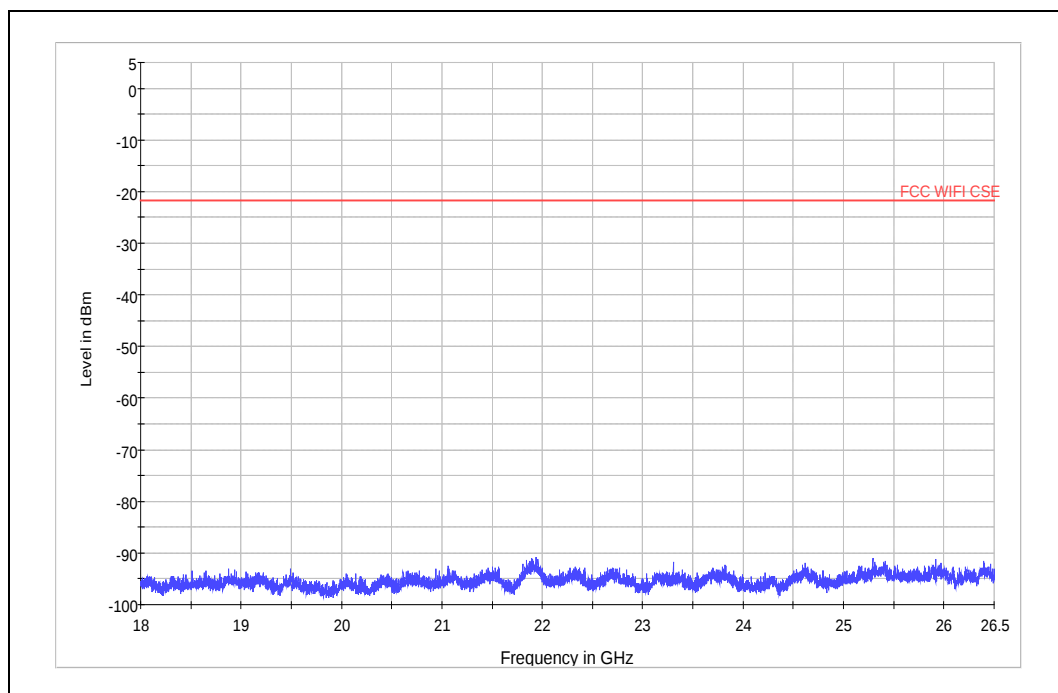


Spurious RF conducted emissions from 18GHz to 26.5GHz

802.11n (HT40) CH6

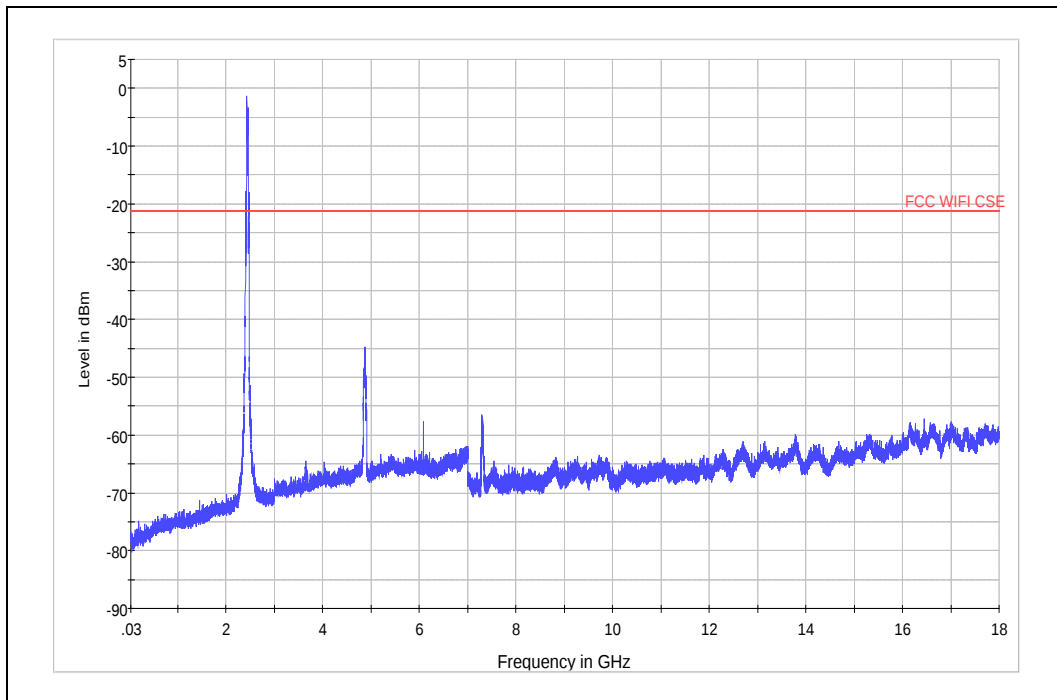


Note: The signal beyond the limit is carrier

Spurious RF conducted emissions from 30MHz to 18GHz

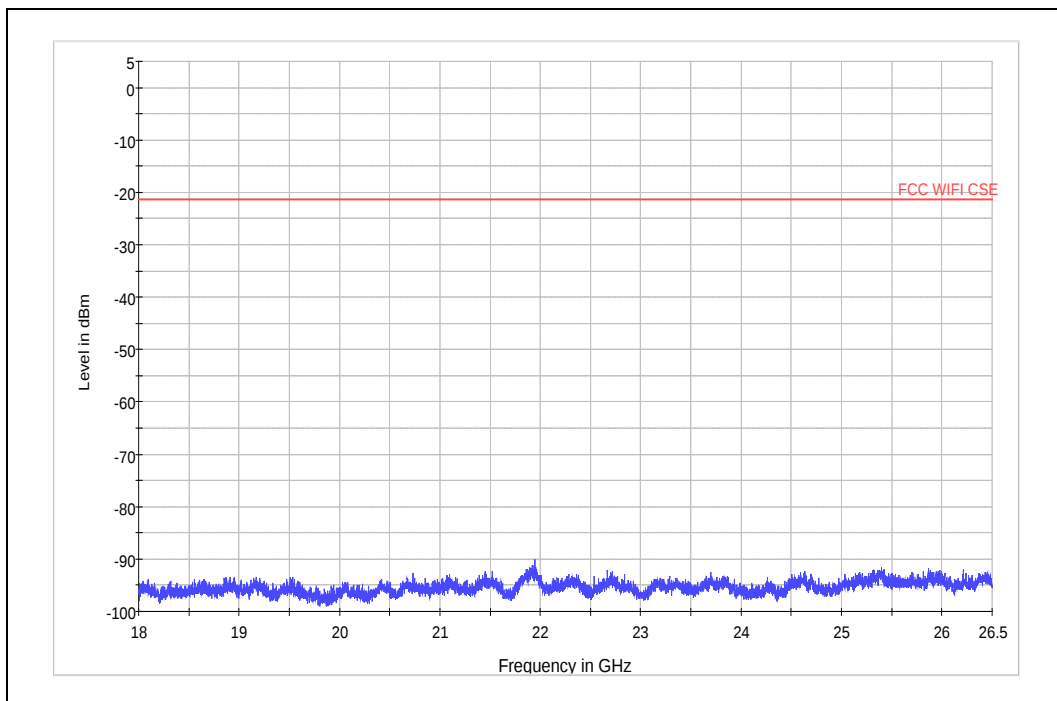


Spurious RF conducted emissions from 18GHz to 26.5GHz

802.11n (HT40) CH9

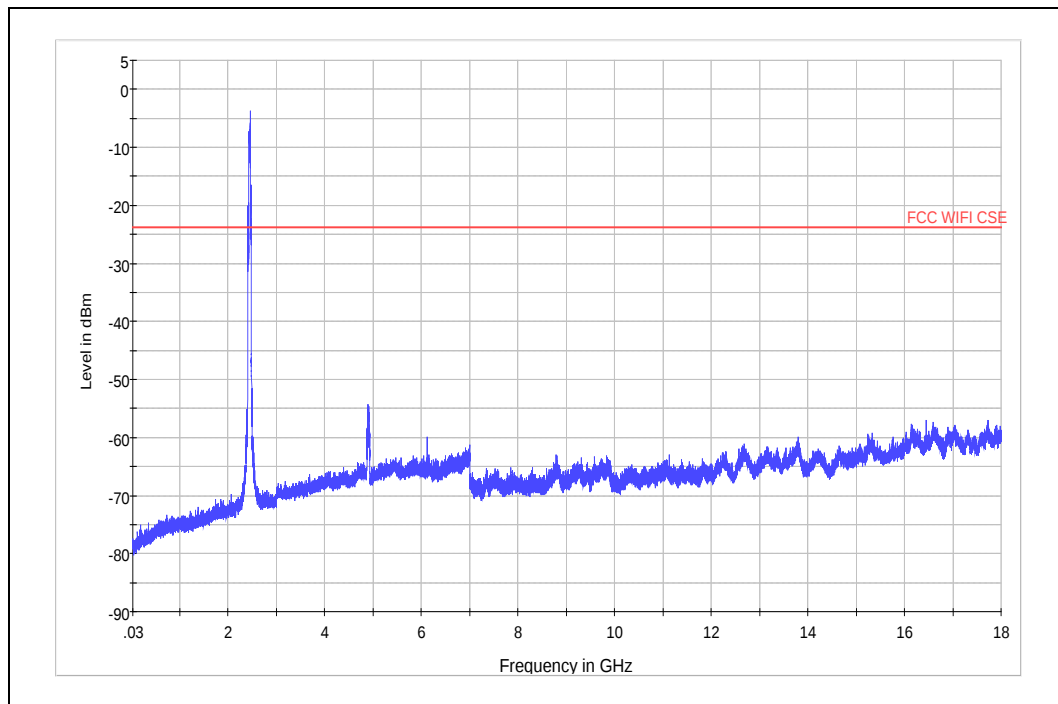


Note: The signal beyond the limit is carrier

Spurious RF conducted emissions from 30MHz to 18GHz

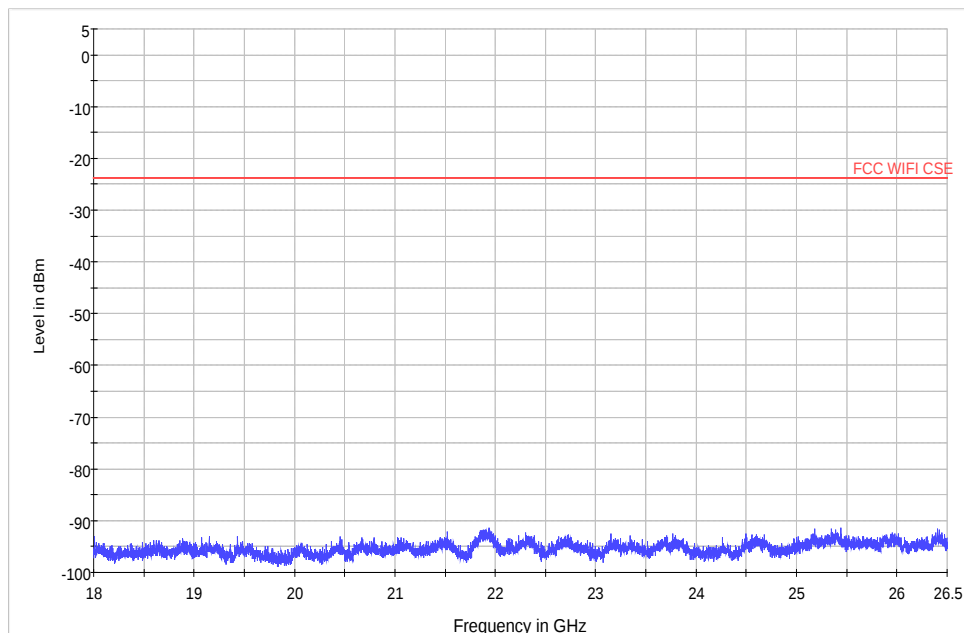


Spurious RF conducted emissions from 18GHz to 26.5GHz

BLE CH0

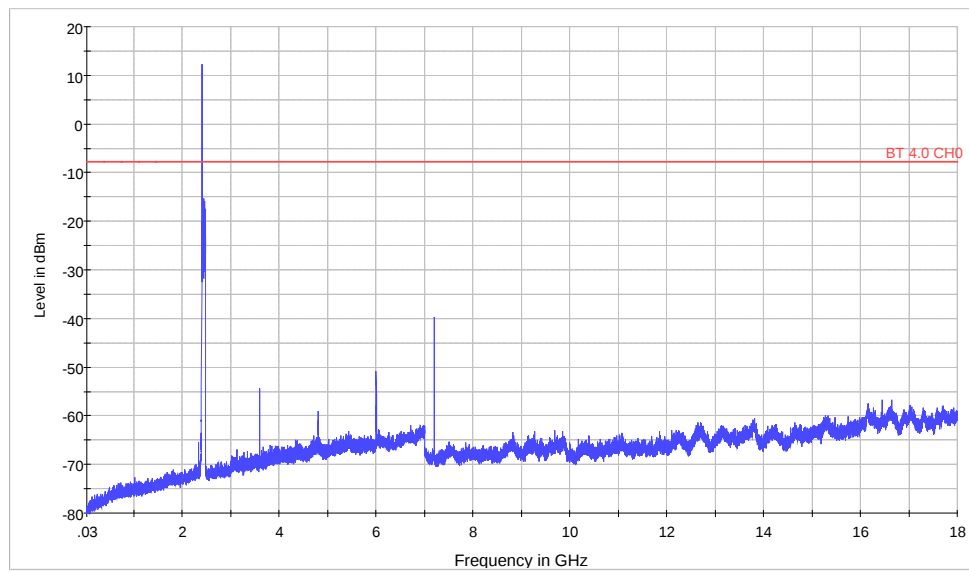


Note: The signal beyond the limit is carrier

Spurious RF conducted emissions from 30MHz to 18GHz

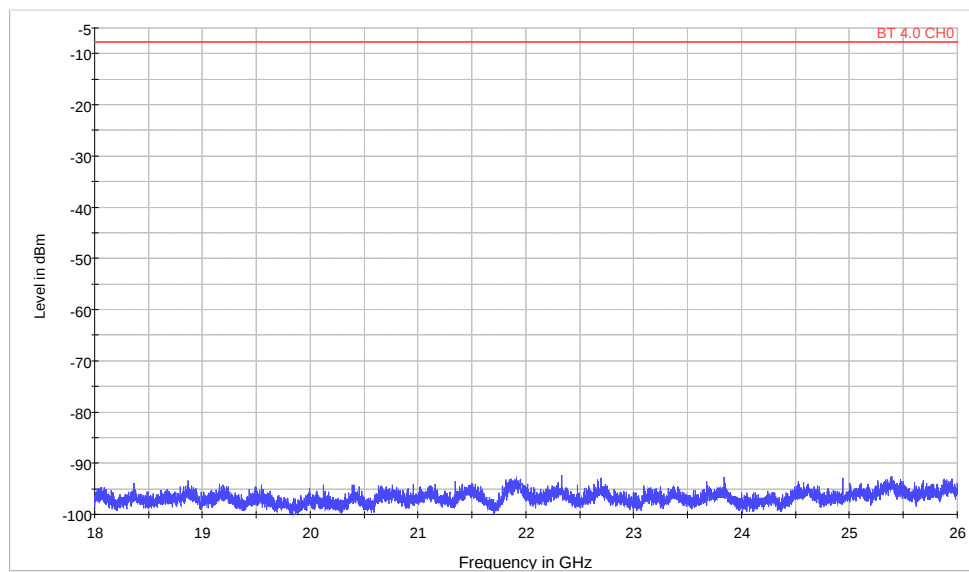


Spurious RF conducted emissions from 18GHz to 26.5GHz

BLE CH19

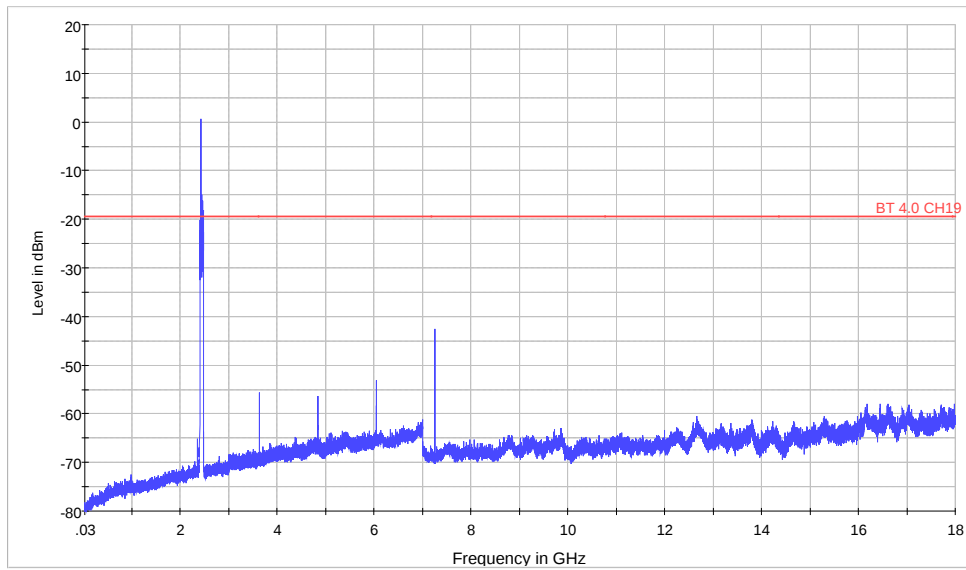


Note: The signal beyond the limit is carrier

Spurious RF conducted emissions from 30MHz to 18GHz

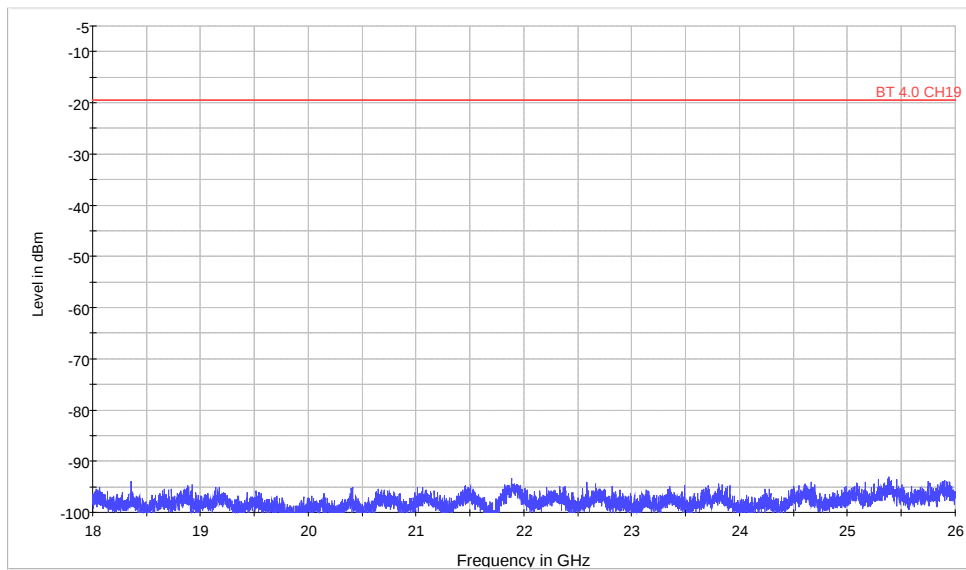


Spurious RF conducted emissions from 18GHz to 26.5GHz

BLE CH39

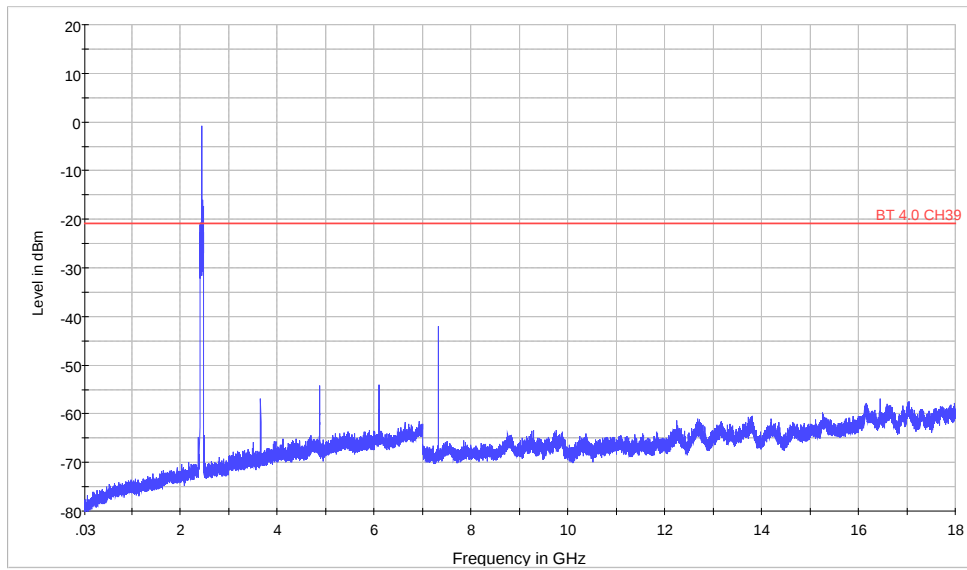

Note: The signal beyond the limit is carrier

Spurious RF conducted emissions from 30MHz to 18GHz

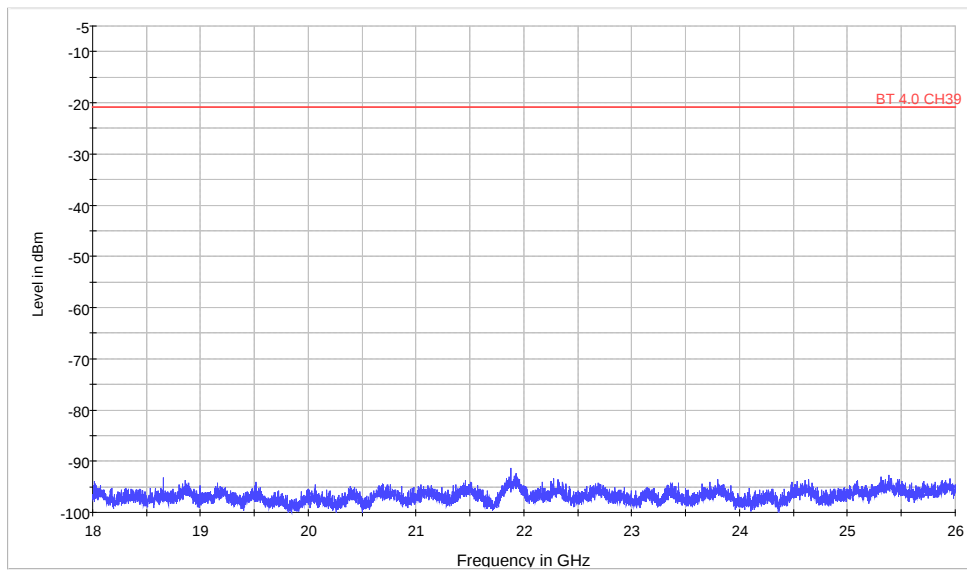

Spurious RF conducted emissions from 18GHz to 26.5GHz

## 5.7. Radiates Emission

### Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |

### Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.4-2014. The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The radiated emissions measurements were made in a typical installation configuration. Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

During the test, below 30MHz, the center of the loop shall be 1 meters; above 30MHz, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Set the spectrum analyzer in the following:

Below 1GHz (detector: Peak and Quasi-Peak)

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz(detector: Peak):

(a) PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO


(b) AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.


The test is in transmitting mode.

## Test setup


9KHz~~~ 30MHz

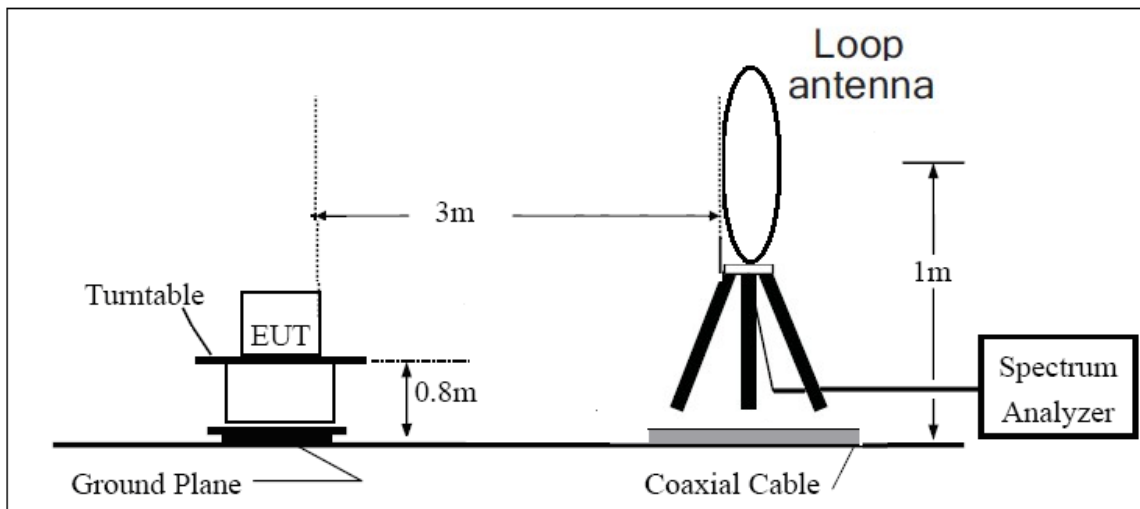

30MHz~~~ 1GHz

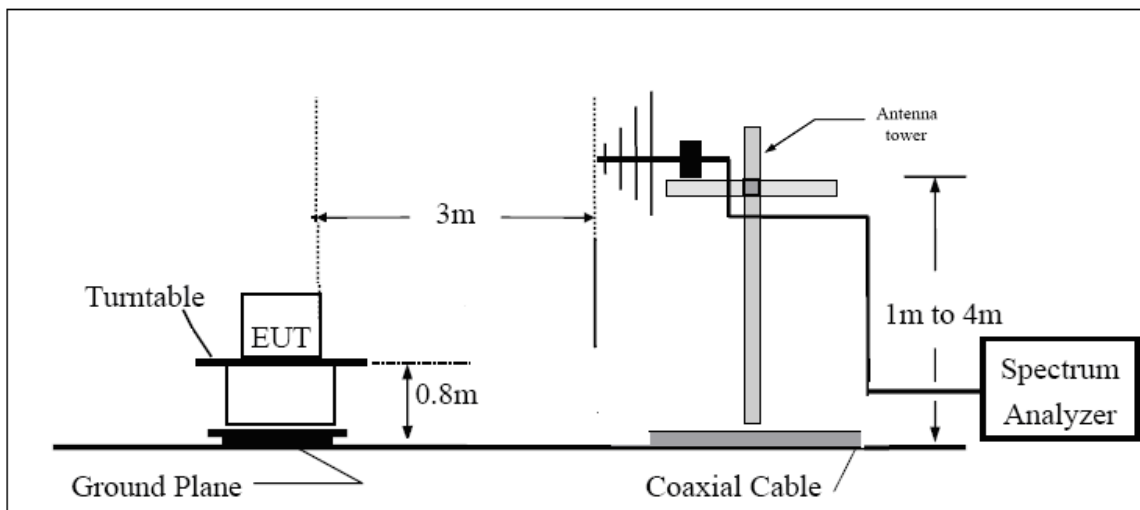

Above 1GHz

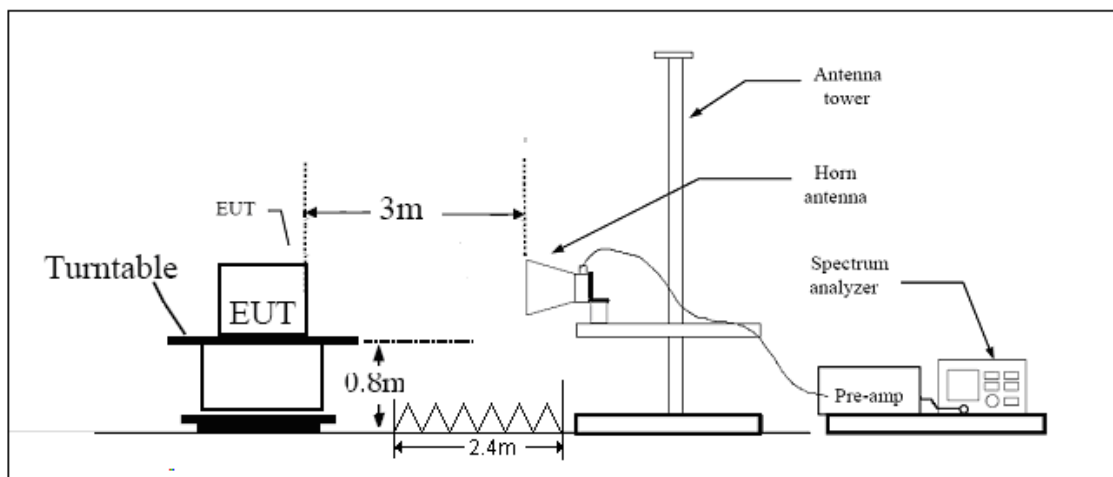

Note: Area side:2.4mX3.6m

## Limits

Rule Part 15.247(d) specifies that “In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).”

Limit in restricted band

| Frequency of emission (MHz) | Field strength(uV/m) | Field strength(dBuV/m) |
|-----------------------------|----------------------|------------------------|
| 0.009–0.490                 | 2400/F(kHz)          | /                      |
| 0.490–1.705                 | 24000/F(kHz)         | /                      |
| 1.705–30.0                  | 30                   | /                      |
| 30-88                       | 100                  | 40                     |
| 88-216                      | 150                  | 43.5                   |
| 216-960                     | 200                  | 46                     |
| Above960                    | 500                  | 54                     |

## Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .

| Frequency    | Uncertainty |
|--------------|-------------|
| 9KHz-30MHz   | 3.55 dB     |
| 30MHz-200MHz | 4.19 dB     |
| 200MHz-1GHz  | 3.63 dB     |
| Above 1GHz   | 3.68 dB     |

## Test result

Sweep from 9 kHz to 30MHz, and the emissions more than 20 dB below the permissible value are not reported.


The messy code (dB<sub>μV/m</sub>) including in the following graphs mean dBuV/m.

The following graphs display the maximum values of horizontal and vertical by software.

For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

## 802.11b CH1

RE 0.03-1GHz QP Class B

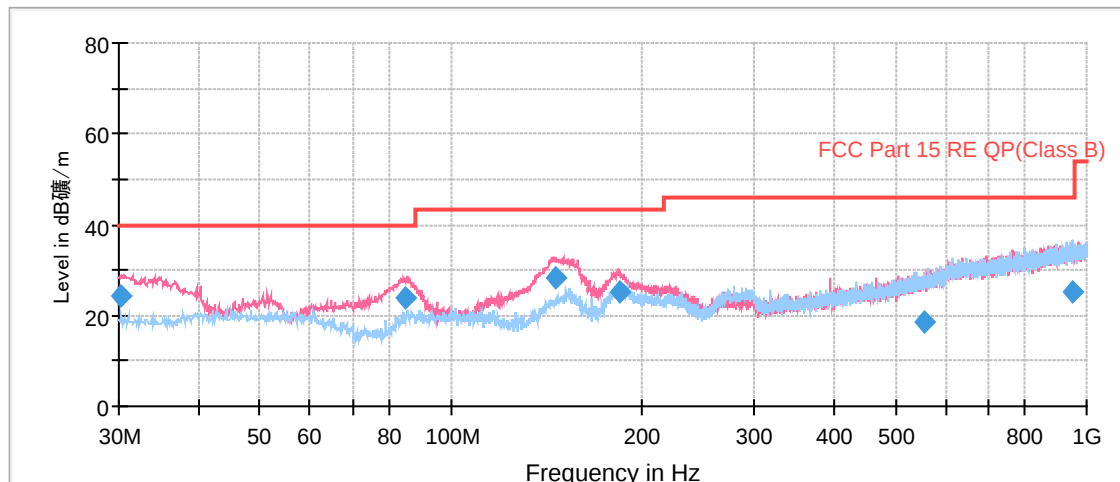

Radiates Emission from 30MHz to 1GHz


| Frequency (MHz) | Quasi-Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 30.127500       | 24.2                | 100.0       | V            | 0.0           | 36.1                   | -11.9               | 15.8        | 40.0           |
| 84.811250       | 24.0                | 100.0       | V            | 35.0          | 34.2                   | -10.2               | 16.0        | 40.0           |
| 145.911250      | 28.3                | 100.0       | V            | 224.0         | 37.3                   | -9.0                | 15.2        | 43.5           |
| 183.952500      | 25.3                | 100.0       | V            | 204.0         | 36.4                   | -11.1               | 18.2        | 43.5           |
| 555.902500      | 18.6                | 100.0       | H            | 324.0         | 39.8                   | -21.2               | 27.4        | 46.0           |
| 950.936250      | 25.1                | 100.0       | H            | 346.0         | 51.1                   | -26.0               | 20.9        | 46.0           |

Remark: 1. Quasi-Peak = Reading value + Correction factor

2. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)

3. Margin = Limit – Quasi-Peak

## RE 1G-3GHz PK+AV Class B

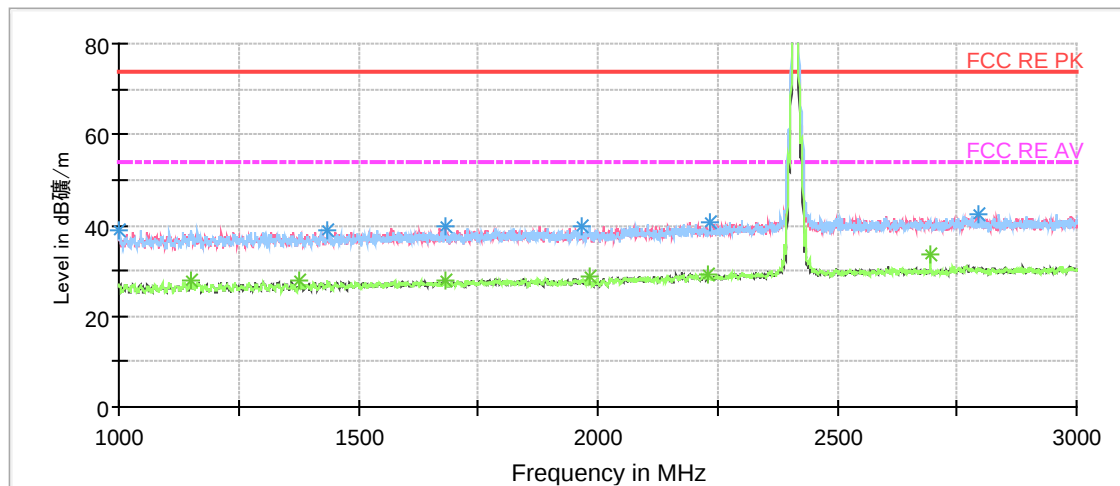

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz


| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1000.000000     | 39.1          | 100.0       | V            | 83.0          | 50.5                   | -11.4               | 34.9        | 74             |
| 1435.000000     | 38.9          | 100.0       | H            | 238.0         | 48.6                   | -9.7                | 35.1        | 74             |
| 1682.500000     | 39.7          | 100.0       | V            | 0.0           | 48.5                   | -8.8                | 34.3        | 74             |
| 1966.000000     | 39.7          | 100.0       | H            | 113.0         | 47.6                   | -7.9                | 34.3        | 74             |
| 2236.000000     | 40.8          | 100.0       | H            | 145.0         | 47.2                   | -6.4                | 33.2        | 74             |
| 2797.000000     | 42.6          | 100.0       | V            | 198.0         | 46.8                   | -4.2                | 31.4        | 74             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1151.500000     | 27.7             | 100.0       | H            | 72.0          | 38.5                   | -10.8               | 26.3        | 54             |
| 1377.500000     | 27.7             | 100.0       | H            | 249.0         | 37.6                   | -9.9                | 26.3        | 54             |
| 1682.000000     | 27.9             | 100.0       | V            | 0.0           | 36.7                   | -8.8                | 26.1        | 54             |
| 1982.500000     | 28.6             | 100.0       | H            | 103.0         | 36.5                   | -7.9                | 25.4        | 54             |
| 2230.000000     | 29.0             | 100.0       | V            | 354.0         | 35.4                   | -6.4                | 25.0        | 54             |
| 2695.500000     | 33.7             | 100.0       | H            | 0.0           | 38.2                   | -4.5                | 20.3        | 54             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## RE 3-18GHz PK+AV

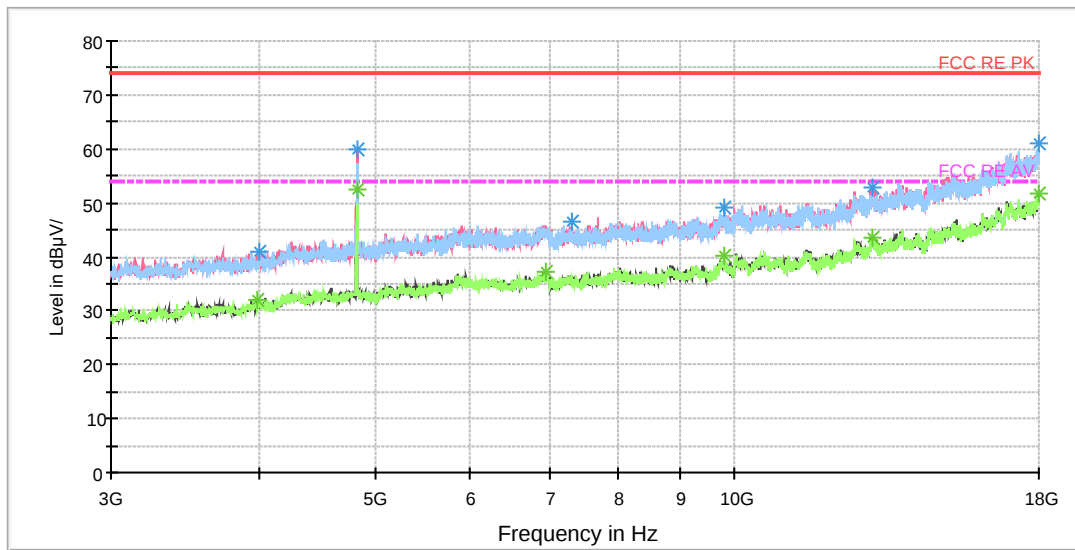

## Radiates Emission from 3GHz to 18GHz


| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 3982.500000     | 38.9          | 100.0       | V            | 327.0         | 39.3                   | -0.4                | 35.1        | 74             |
| 4822.500000     | 60.0          | 100.0       | V            | 351.0         | 62.7                   | -2.7                | 14.0        | 74             |
| 6941.250000     | 44.2          | 100.0       | H            | 98.0          | 50.9                   | -6.7                | 29.8        | 74             |
| 9795.000000     | 48.5          | 100.0       | H            | 0.0           | 60.7                   | -12.2               | 25.5        | 74             |
| 13042.500000    | 51.7          | 100.0       | H            | 70.0          | 67.9                   | -16.2               | 22.3        | 74             |
| 17968.125000    | 58.5          | 100.0       | H            | 25.0          | 83.5                   | -25.0               | 15.5        | 74             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 3982.500000     | 31.9             | 100.0       | V            | 327.0         | 32.3                   | -0.4                | 22.1        | 54             |
| 4822.500000     | 52.3             | 100.0       | V            | 351.0         | 55.0                   | -2.7                | 1.7         | 54             |
| 6941.250000     | 37.2             | 100.0       | H            | 98.0          | 43.9                   | -6.7                | 16.8        | 54             |
| 9795.000000     | 40.1             | 100.0       | H            | 0.0           | 52.3                   | -12.2               | 13.9        | 54             |
| 13042.500000    | 43.7             | 100.0       | H            | 70.0          | 59.9                   | -16.2               | 10.3        | 54             |
| 17968.125000    | 51.7             | 100.0       | H            | 25.0          | 76.7                   | -25.0               | 2.3         | 54             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## RE 18-26.5GHz PK+AV

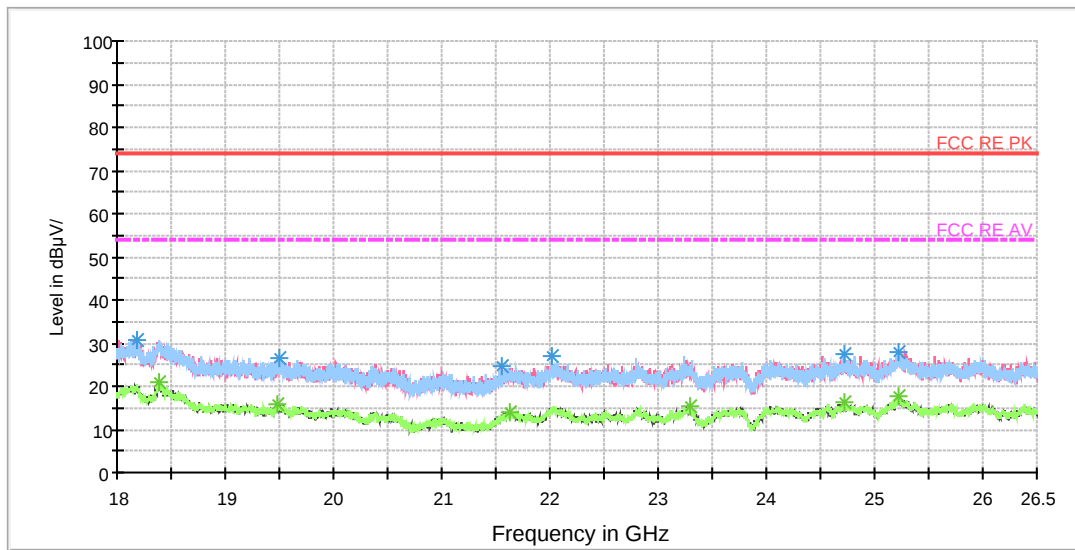

## Radiates Emission from 18GHz to 26.5GHz

| Frequency (MHz) | Peak (dBuV/m) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 18190.187500    | 30.9          | H            | 0.0           | 35.9                   | -5.0                | 43.1        | 74             |
| 19493.875000    | 26.4          | H            | 0.0           | 34.0                   | -7.6                | 47.6        | 74             |
| 21558.312500    | 24.5          | V            | 0.0           | 33.2                   | -8.7                | 49.5        | 74             |
| 22016.250000    | 27.1          | H            | 0.0           | 35.2                   | -8.1                | 46.9        | 74             |
| 24715.000000    | 27.3          | H            | 0.0           | 33.8                   | -6.5                | 46.7        | 74             |
| 25230.312500    | 28.0          | V            | 0.0           | 33.9                   | -5.9                | 46.0        | 74             |


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 18381.437500    | 21.0             | H            | 0.0           | 25.8                   | -4.8                | 33.0        | 54             |
| 19487.500000    | 15.9             | H            | 0.0           | 23.6                   | -7.7                | 38.1        | 54             |
| 21631.625000    | 14.1             | V            | 0.0           | 23.2                   | -9.1                | 39.9        | 54             |
| 23294.437500    | 15.5             | V            | 0.0           | 22.5                   | -7.0                | 38.5        | 54             |
| 24726.687500    | 16.1             | H            | 0.0           | 22.3                   | -6.2                | 37.9        | 54             |
| 25215.437500    | 17.6             | H            | 0.0           | 23.7                   | -6.1                | 36.4        | 54             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## 802.11b CH6

RE 0.03-1GHz QP Class B

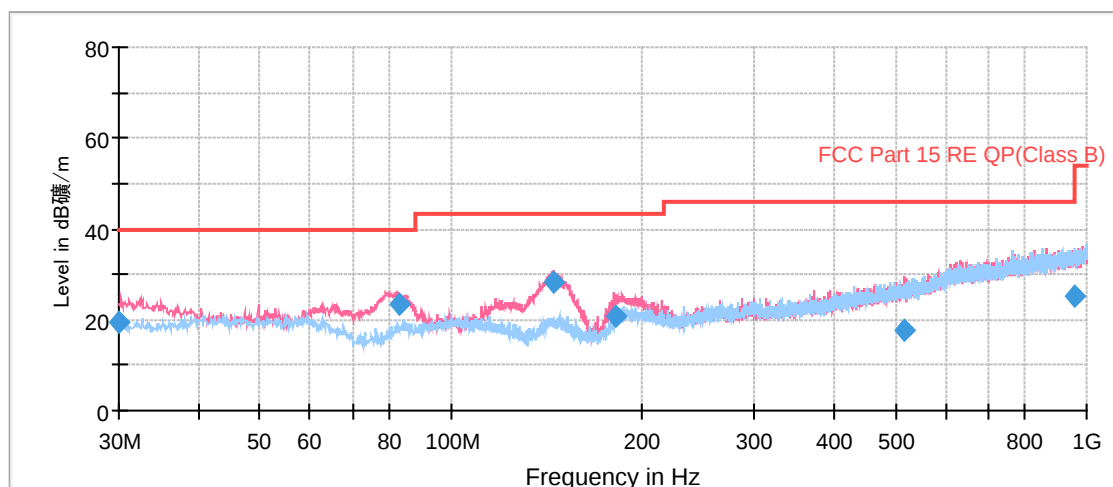

Radiates Emission from 30MHz to 1GHz


| Frequency (MHz) | Quasi-Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 30.000000       | 19.3                | 100.0       | V            | 353.0         | 31.2                   | -11.9               | 20.7        | 40.0           |
| 83.101250       | 23.3                | 100.0       | V            | 76.0          | 32.9                   | -9.6                | 16.7        | 40.0           |
| 145.263750      | 28.5                | 100.0       | V            | 252.0         | 37.5                   | -9.0                | 15.0        | 43.5           |
| 181.192500      | 20.6                | 100.0       | V            | 232.0         | 31.5                   | -10.9               | 22.9        | 43.5           |
| 517.541250      | 17.7                | 100.0       | V            | 0.0           | 38.0                   | -20.3               | 28.3        | 46.0           |
| 959.021250      | 25.2                | 100.0       | H            | 273.0         | 51.4                   | -26.2               | 20.8        | 46.0           |

Remark: 1. Quasi-Peak = Reading value + Correction factor

2. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)

3. Margin = Limit – Quasi-Peak

## RE 1G-3GHz PK+AV Class B

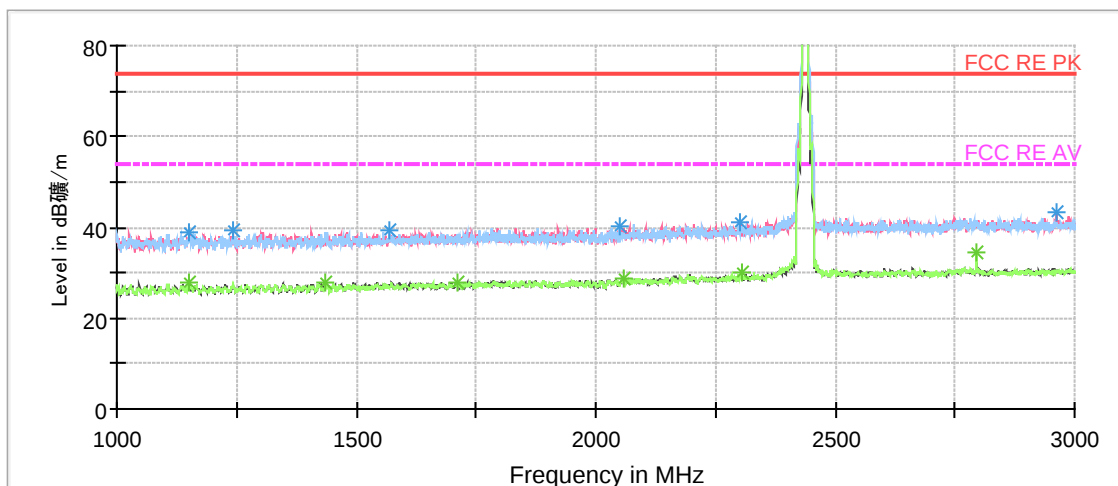

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz


| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1152.500000     | 39.1          | 100.0       | V            | 58.0          | 49.9                   | -10.8               | 34.9        | 74             |
| 1243.500000     | 39.2          | 100.0       | V            | 239.0         | 49.6                   | -10.4               | 34.8        | 74             |
| 1567.500000     | 39.2          | 100.0       | H            | 94.0          | 48.3                   | -9.1                | 34.8        | 74             |
| 2048.500000     | 40.3          | 100.0       | H            | 52.0          | 47.8                   | -7.5                | 33.7        | 74             |
| 2300.000000     | 41.3          | 100.0       | V            | 229.0         | 47.3                   | -6.0                | 32.7        | 74             |
| 2961.500000     | 43.2          | 100.0       | V            | 194.0         | 47.3                   | -4.1                | 30.8        | 74             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1151.500000     | 28.0             | 100.0       | V            | 356.0         | 38.8                   | -10.8               | 26.0        | 54             |
| 1436.500000     | 27.7             | 100.0       | V            | 163.0         | 37.4                   | -9.7                | 26.3        | 54             |
| 1710.000000     | 28.0             | 100.0       | H            | 0.0           | 36.7                   | -8.7                | 26.0        | 54             |
| 2058.000000     | 28.8             | 100.0       | H            | 31.0          | 36.2                   | -7.4                | 25.2        | 54             |
| 2303.500000     | 30.0             | 100.0       | H            | 291.0         | 36.0                   | -6.0                | 24.0        | 54             |
| 2795.500000     | 34.4             | 100.0       | H            | 0.0           | 38.6                   | -4.2                | 19.6        | 54             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## RE 3-18GHz PK+AV

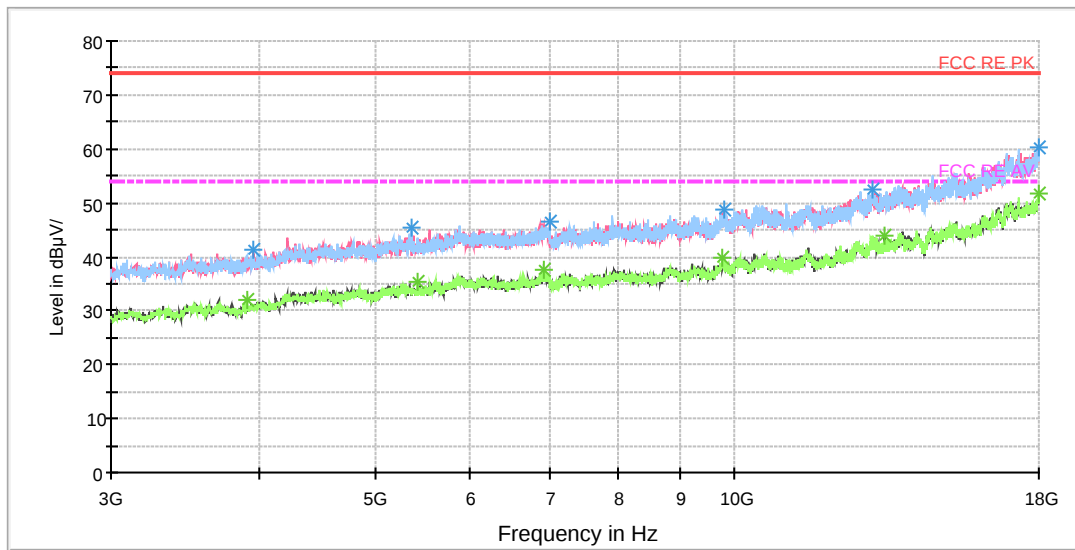

## Radiates Emission from 3GHz to 18GHz


| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 3896.250000     | 40.4          | 100.0       | H            | 233.0         | 40.6                   | -0.2                | 33.6        | 74             |
| 5415.000000     | 42.3          | 100.0       | H            | 9.0           | 46.0                   | -3.7                | 31.7        | 74             |
| 6916.875000     | 44.7          | 100.0       | H            | 21.0          | 51.6                   | -6.9                | 29.3        | 74             |
| 9759.375000     | 48.0          | 100.0       | V            | 277.0         | 59.8                   | -11.8               | 26.0        | 74             |
| 13350.000000    | 50.2          | 100.0       | V            | 0.0           | 66.0                   | -15.8               | 23.8        | 74             |
| 17992.500000    | 58.4          | 100.0       | H            | 145.0         | 83.7                   | -25.3               | 15.6        | 74             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 3896.250000     | 32.0             | 100.0       | H            | 233.0         | 32.2                   | -0.2                | 22.0        | 54             |
| 5415.000000     | 35.4             | 100.0       | H            | 9.0           | 39.1                   | -3.7                | 18.6        | 54             |
| 6916.875000     | 37.6             | 100.0       | H            | 21.0          | 44.5                   | -6.9                | 16.4        | 54             |
| 9759.375000     | 40.0             | 100.0       | V            | 277.0         | 51.8                   | -11.8               | 14.0        | 54             |
| 13350.000000    | 43.9             | 100.0       | V            | 0.0           | 59.7                   | -15.8               | 10.1        | 54             |
| 17992.500000    | 51.8             | 100.0       | H            | 145.0         | 77.1                   | -25.3               | 2.2         | 54             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## RE 18-26.5GHz PK+AV

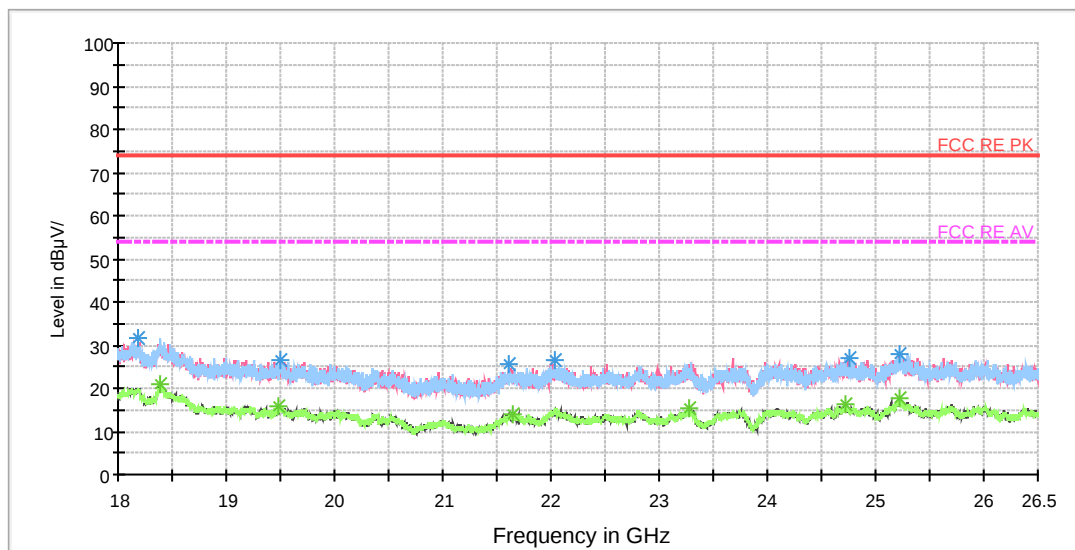

## Radiates Emission from 18GHz to 26.5GHz

| Frequency (MHz) | Peak (dBuV/m) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 18190.187500    | 31.5          | H            | 0.0           | 36.5                   | -5.0                | 42.5        | 74             |
| 19496.000000    | 26.6          | V            | 0.0           | 34.2                   | -7.6                | 47.4        | 74             |
| 21602.937500    | 25.4          | H            | 0.0           | 34.2                   | -8.8                | 48.6        | 74             |
| 22042.812500    | 26.3          | V            | 0.0           | 34.3                   | -8.0                | 47.7        | 74             |
| 24763.875000    | 27.2          | V            | 0.0           | 33.9                   | -6.7                | 46.8        | 74             |
| 25222.875000    | 28.0          | V            | 0.0           | 33.9                   | -5.9                | 46.0        | 74             |


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 18386.750000    | 20.9             | H            | 0.0           | 25.7                   | -4.8                | 33.1        | 54             |
| 19486.437500    | 16.0             | V            | 0.0           | 23.7                   | -7.7                | 38.0        | 54             |
| 21651.812500    | 14.1             | V            | 0.0           | 23.3                   | -9.2                | 39.9        | 54             |
| 23275.312500    | 15.3             | V            | 0.0           | 22.5                   | -7.2                | 38.7        | 54             |
| 24722.437500    | 16.2             | V            | 0.0           | 22.4                   | -6.2                | 37.8        | 54             |
| 25226.062500    | 17.5             | H            | 0.0           | 23.4                   | -5.9                | 36.5        | 54             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

# 802.11b CH11

RE 0.03-1GHz QP Class B

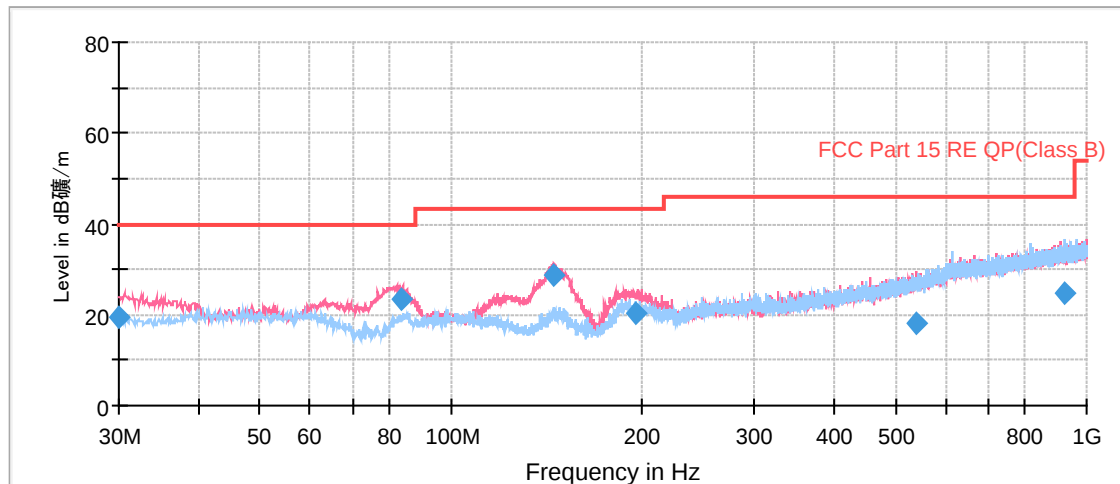

Radiates Emission from 30MHz to 1GHz


| Frequency (MHz) | Quasi-Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 30.046250       | 19.7                | 100.0       | V            | 14.0          | 31.6                   | -11.9               | 20.3        | 40.0           |
| 83.395000       | 23.2                | 100.0       | V            | 55.0          | 32.9                   | -9.7                | 16.8        | 40.0           |
| 145.070000      | 28.7                | 100.0       | V            | 245.0         | 37.7                   | -9.0                | 14.8        | 43.5           |
| 195.552500      | 20.3                | 100.0       | V            | 0.0           | 32.1                   | -11.8               | 23.2        | 43.5           |
| 538.315000      | 18.2                | 100.0       | V            | 14.0          | 39.0                   | -20.8               | 27.8        | 46.0           |
| 921.868750      | 24.8                | 100.0       | H            | 181.0         | 50.6                   | -25.8               | 21.2        | 46.0           |

Remark: 1. Quasi-Peak = Reading value + Correction factor

2. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)

3. Margin = Limit – Quasi-Peak

## RE 1G-3GHz PK+AV Class B

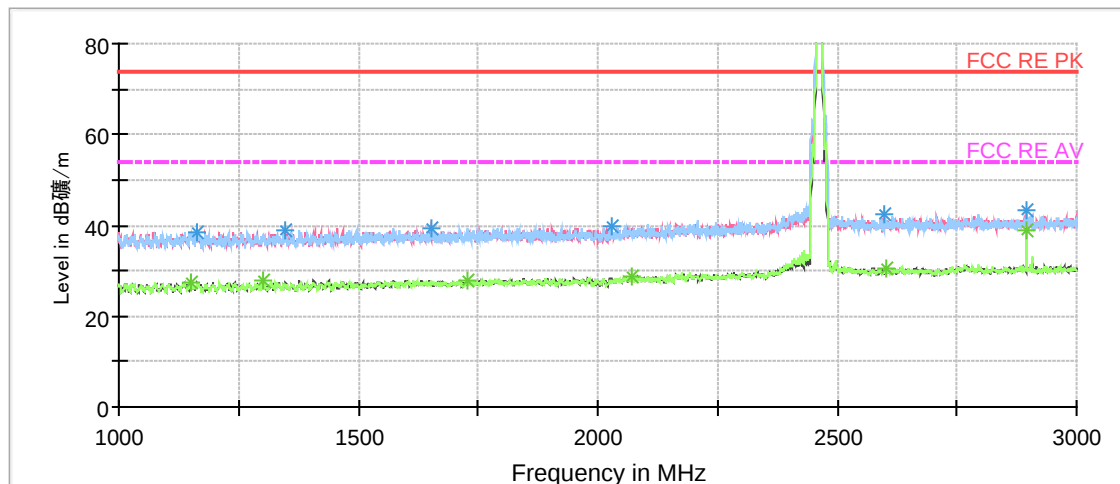

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz


| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1162.500000     | 38.6          | 100.0       | V            | 246.0         | 49.4                   | -10.8               | 35.4        | 74             |
| 1346.000000     | 39.0          | 100.0       | V            | 193.0         | 49.0                   | -10.0               | 35.0        | 74             |
| 1654.500000     | 39.4          | 100.0       | V            | 193.0         | 48.2                   | -8.8                | 34.6        | 74             |
| 2028.500000     | 39.6          | 100.0       | H            | 145.0         | 47.2                   | -7.6                | 34.4        | 74             |
| 2600.000000     | 42.4          | 100.0       | H            | 165.0         | 47.0                   | -4.6                | 31.6        | 74             |
| 2895.000000     | 43.1          | 100.0       | H            | 1.0           | 47.3                   | -4.2                | 30.9        | 74             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1151.500000     | 27.6             | 100.0       | H            | 32.0          | 38.4                   | -10.8               | 26.4        | 54             |
| 1302.500000     | 27.8             | 100.0       | V            | 336.0         | 37.9                   | -10.1               | 26.2        | 54             |
| 1727.000000     | 28.0             | 100.0       | V            | 225.0         | 36.6                   | -8.6                | 26.0        | 54             |
| 2070.500000     | 28.9             | 100.0       | V            | 152.0         | 36.2                   | -7.3                | 25.1        | 54             |
| 2604.500000     | 30.5             | 100.0       | V            | 357.0         | 35.1                   | -4.6                | 23.5        | 54             |
| 2895.500000     | 38.7             | 100.0       | H            | 3.0           | 42.9                   | -4.2                | 15.3        | 54             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## RE 3-18GHz PK+AV

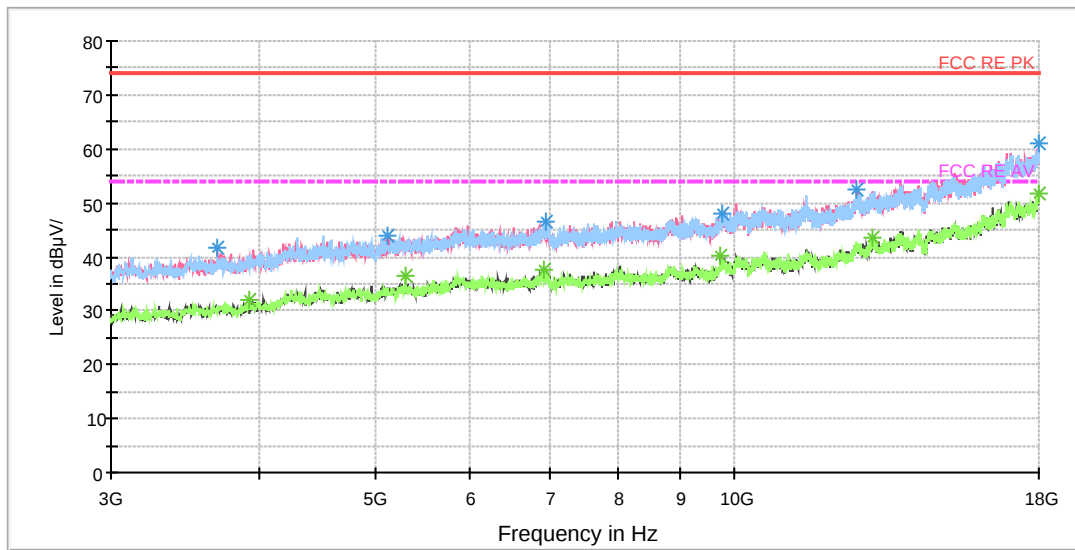

## Radiates Emission from 3GHz to 18GHz


| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 3922.500000     | 40.3          | 100.0       | H            | 33.0          | 40.4                   | -0.1                | 33.7        | 74             |
| 5295.000000     | 41.6          | 100.0       | H            | 20.0          | 45.4                   | -3.8                | 32.4        | 74             |
| 6924.375000     | 44.5          | 100.0       | H            | 159.0         | 51.3                   | -6.8                | 29.5        | 74             |
| 9742.500000     | 46.4          | 100.0       | V            | 0.0           | 58.0                   | -11.6               | 27.6        | 74             |
| 13033.125000    | 51.5          | 100.0       | V            | 322.0         | 67.7                   | -16.2               | 22.5        | 74             |
| 17986.875000    | 58.9          | 100.0       | H            | 135.0         | 84.1                   | -25.2               | 15.1        | 74             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 3922.500000     | 32.2             | 100.0       | H            | 33.0          | 32.3                   | -0.1                | 21.8        | 54             |
| 5295.000000     | 36.3             | 100.0       | H            | 20.0          | 40.1                   | -3.8                | 17.7        | 54             |
| 6924.375000     | 37.6             | 100.0       | H            | 159.0         | 44.4                   | -6.8                | 16.4        | 54             |
| 9742.500000     | 40.2             | 100.0       | V            | 0.0           | 51.8                   | -11.6               | 13.8        | 54             |
| 13033.125000    | 43.4             | 100.0       | V            | 322.0         | 59.6                   | -16.2               | 10.6        | 54             |
| 17986.875000    | 51.5             | 100.0       | H            | 135.0         | 76.7                   | -25.2               | 2.5         | 54             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## RE 18-26.5GHz PK+AV

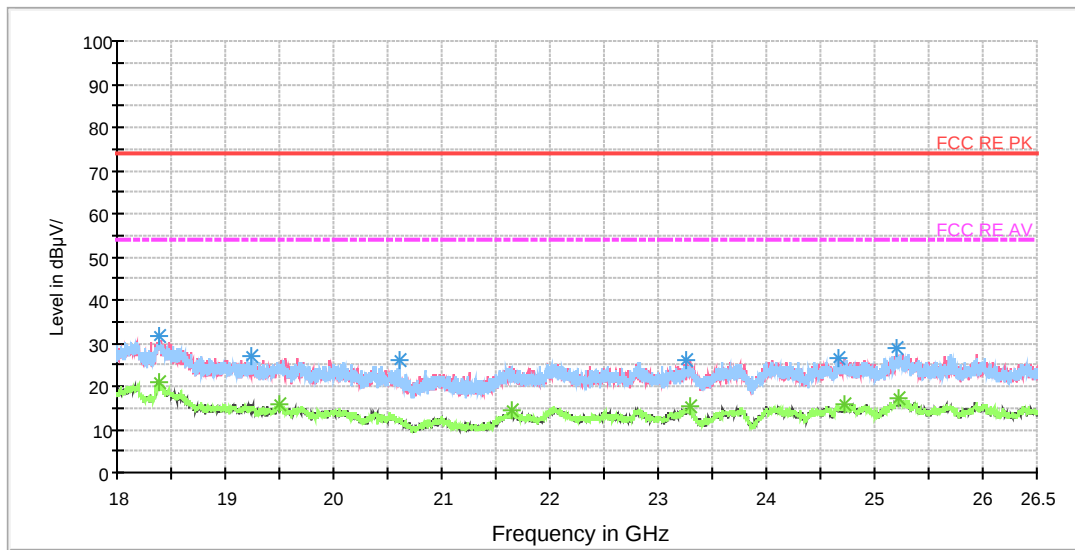

## Radiates Emission from 18GHz to 26.5GHz

| Frequency (MHz) | Peak (dBuV/m) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 18392.062500    | 31.4          | H            | 0.0           | 36.3                   | -4.9                | 42.6        | 74             |
| 19249.500000    | 26.8          | H            | 0.0           | 33.6                   | -6.8                | 47.2        | 74             |
| 20605.250000    | 25.8          | H            | 0.0           | 34.4                   | -8.6                | 48.2        | 74             |
| 23260.437500    | 26.0          | V            | 0.0           | 33.4                   | -7.4                | 48.0        | 74             |
| 24657.625000    | 26.4          | H            | 0.0           | 33.4                   | -7.0                | 47.6        | 74             |
| 25210.125000    | 28.7          | H            | 0.0           | 35.0                   | -6.3                | 45.3        | 74             |


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 18386.750000    | 20.8             | V            | 0.0           | 25.6                   | -4.8                | 33.2        | 54             |
| 19506.625000    | 16.0             | V            | 0.0           | 23.5                   | -7.5                | 38.0        | 54             |
| 21648.625000    | 14.5             | H            | 0.0           | 23.7                   | -9.2                | 39.5        | 54             |
| 23294.437500    | 15.4             | V            | 0.0           | 22.4                   | -7.0                | 38.6        | 54             |
| 24729.875000    | 15.8             | V            | 0.0           | 22.0                   | -6.2                | 38.2        | 54             |
| 25226.062500    | 17.3             | V            | 0.0           | 23.2                   | -5.9                | 36.7        | 54             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

# 802.11g CH1

RE 0.03-1GHz QP Class B

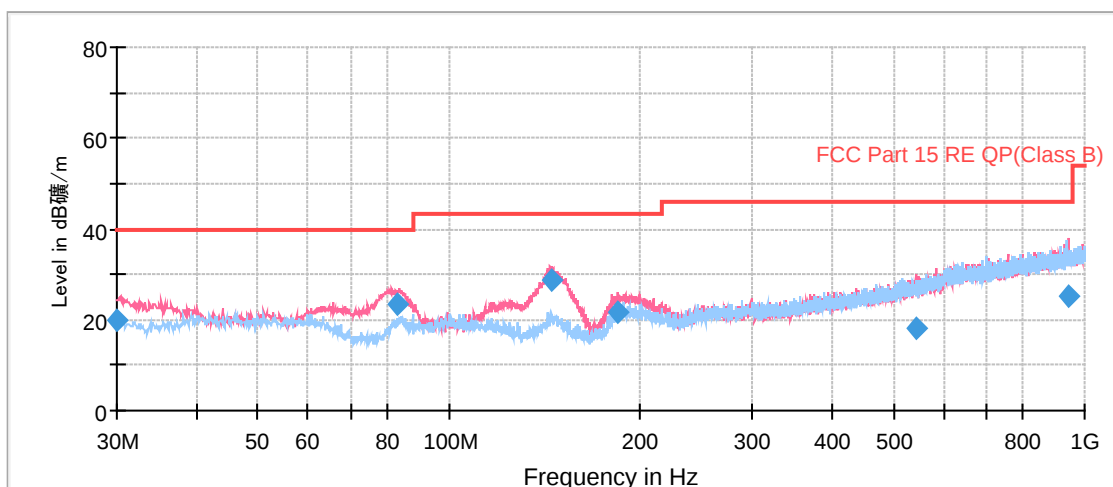


Radiates Emission from 30MHz to 1GHz

| Frequency (MHz) | Quasi-Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 30.000000       | 19.8                | 100.0       | V            | 307.0         | 31.7                   | -11.9               | 20.2        | 40.0           |
| 83.110000       | 23.3                | 100.0       | V            | 35.0          | 32.9                   | -9.6                | 16.7        | 40.0           |
| 145.063750      | 28.8                | 100.0       | V            | 248.0         | 37.8                   | -9.0                | 14.7        | 43.5           |
| 184.630000      | 21.9                | 100.0       | V            | 217.0         | 33.0                   | -11.1               | 21.6        | 43.5           |
| 541.633750      | 18.2                | 100.0       | V            | 0.0           | 39.0                   | -20.8               | 27.8        | 46.0           |
| 941.918750      | 25.1                | 100.0       | V            | 147.0         | 51.1                   | -26.0               | 20.9        | 46.0           |

- Remark: 1. Quasi-Peak = Reading value + Correction factor  
2. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)  
3. Margin = Limit – Quasi-Peak

## RE 1G-3GHz PK+AV Class B

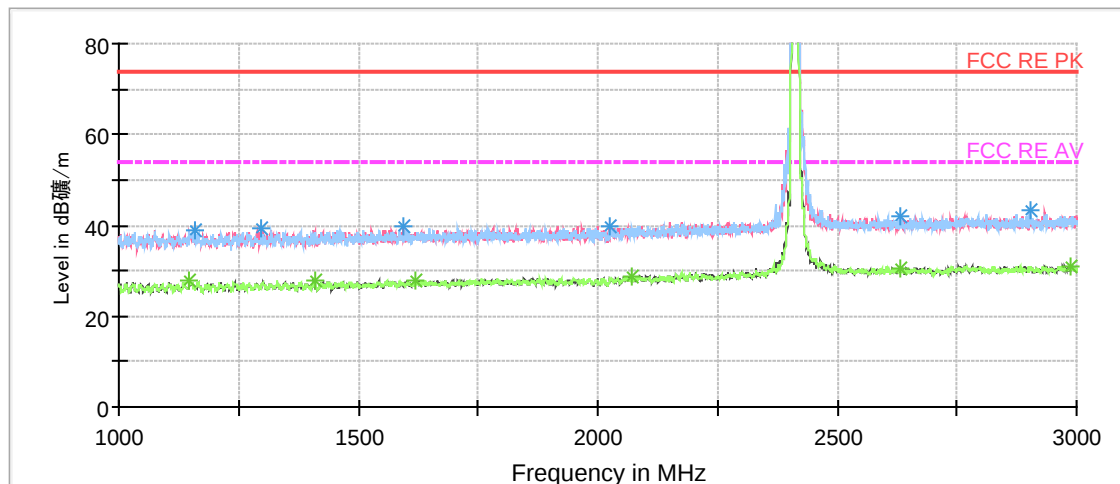

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz


| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1158.500000     | 39.0          | 100.0       | H            | 10.0          | 49.8                   | -10.8               | 35.0        | 74             |
| 1297.000000     | 39.1          | 100.0       | V            | 131.0         | 49.2                   | -10.1               | 34.9        | 74             |
| 1593.000000     | 39.6          | 100.0       | V            | 0.0           | 48.6                   | -9.0                | 34.4        | 74             |
| 2025.500000     | 40.0          | 100.0       | V            | 235.0         | 47.6                   | -7.6                | 34.0        | 74             |
| 2631.500000     | 41.8          | 100.0       | H            | 0.0           | 46.4                   | -4.6                | 32.2        | 74             |
| 2902.000000     | 43.4          | 100.0       | H            | 207.0         | 47.6                   | -4.2                | 30.6        | 74             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1148.000000     | 27.8             | 100.0       | H            | 0.0           | 38.6                   | -10.8               | 26.2        | 54             |
| 1408.500000     | 27.8             | 100.0       | H            | 114.0         | 37.6                   | -9.8                | 26.2        | 54             |
| 1621.000000     | 27.9             | 100.0       | H            | 73.0          | 36.8                   | -8.9                | 26.1        | 54             |
| 2070.500000     | 28.7             | 100.0       | V            | 142.0         | 36.0                   | -7.3                | 25.3        | 54             |
| 2631.000000     | 30.6             | 100.0       | V            | 224.0         | 35.2                   | -4.6                | 23.4        | 54             |
| 2989.500000     | 31.1             | 100.0       | V            | 194.0         | 35.1                   | -4.0                | 22.9        | 54             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## RE 3-18GHz PK+AV

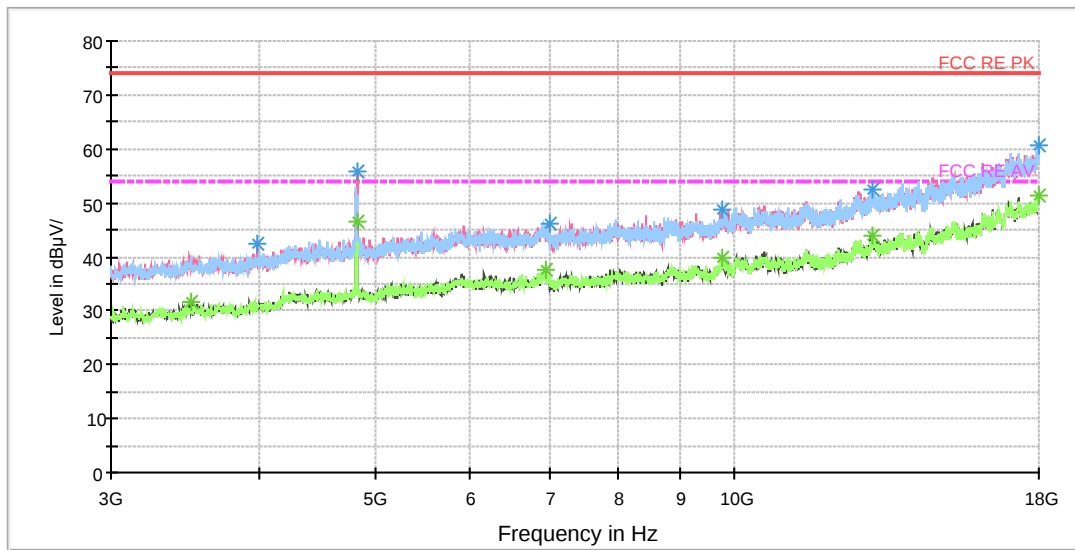

## Radiates Emission from 3GHz to 18GHz


| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 3500.625000     | 38.0          | 100.0       | V            | 103.0         | 38.5                   | -0.5                | 36.0        | 74             |
| 4826.250000     | 52.9          | 100.0       | V            | 0.0           | 55.7                   | -2.8                | 21.1        | 74             |
| 6937.500000     | 44.8          | 100.0       | H            | 275.0         | 51.6                   | -6.8                | 29.2        | 74             |
| 9766.875000     | 47.8          | 100.0       | H            | 117.0         | 59.7                   | -11.9               | 26.2        | 74             |
| 13068.750000    | 50.7          | 100.0       | H            | 129.0         | 66.9                   | -16.2               | 23.3        | 74             |
| 17979.375000    | 60.7          | 100.0       | H            | 155.0         | 85.9                   | -25.2               | 13.3        | 74             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 3500.625000     | 31.8             | 100.0       | V            | 103.0         | 32.3                   | -0.5                | 22.2        | 54             |
| 4826.250000     | 46.6             | 100.0       | V            | 0.0           | 49.4                   | -2.8                | 7.4         | 54             |
| 6937.500000     | 37.6             | 100.0       | H            | 275.0         | 44.4                   | -6.8                | 16.4        | 54             |
| 9766.875000     | 39.8             | 100.0       | H            | 117.0         | 51.7                   | -11.9               | 14.2        | 54             |
| 13068.750000    | 44.0             | 100.0       | H            | 129.0         | 60.2                   | -16.2               | 10.0        | 54             |
| 17979.375000    | 51.5             | 100.0       | H            | 155.0         | 76.7                   | -25.2               | 2.5         | 54             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## RE 18-26.5GHz PK+AV

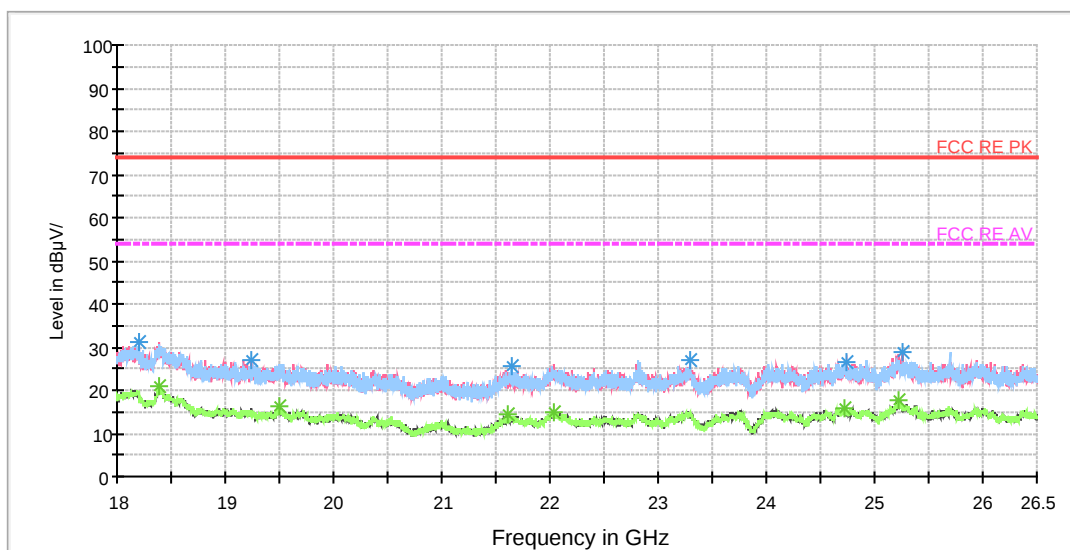

## Radiates Emission from 18GHz to 26.5GHz

| Frequency (MHz) | Peak (dBuV/m) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 18199.750000    | 31.4          | H            | 0.0           | 36.4                   | -5.0                | 42.6        | 74             |
| 19233.562500    | 26.8          | V            | 0.0           | 33.6                   | -6.8                | 47.2        | 74             |
| 21644.375000    | 25.8          | H            | 0.0           | 34.9                   | -9.1                | 48.2        | 74             |
| 23289.125000    | 27.2          | H            | 0.0           | 34.3                   | -7.1                | 46.8        | 74             |
| 24732.000000    | 26.3          | V            | 0.0           | 32.6                   | -6.3                | 47.7        | 74             |
| 25264.312500    | 28.7          | V            | 0.0           | 35.6                   | -6.9                | 45.3        | 74             |


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 18392.062500    | 20.8             | H            | 0.0           | 25.7                   | -4.9                | 33.2        | 54             |
| 19494.937500    | 16.1             | V            | 0.0           | 23.7                   | -7.6                | 37.9        | 54             |
| 21610.375000    | 14.2             | V            | 0.0           | 23.1                   | -8.9                | 39.8        | 54             |
| 22032.187500    | 15.1             | V            | 0.0           | 23.1                   | -8.0                | 38.9        | 54             |
| 24729.875000    | 15.9             | V            | 0.0           | 22.1                   | -6.2                | 38.1        | 54             |
| 25229.250000    | 17.9             | V            | 0.0           | 23.8                   | -5.9                | 36.1        | 54             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

# 802.11g CH6

RE 0.03-1GHz QP Class B

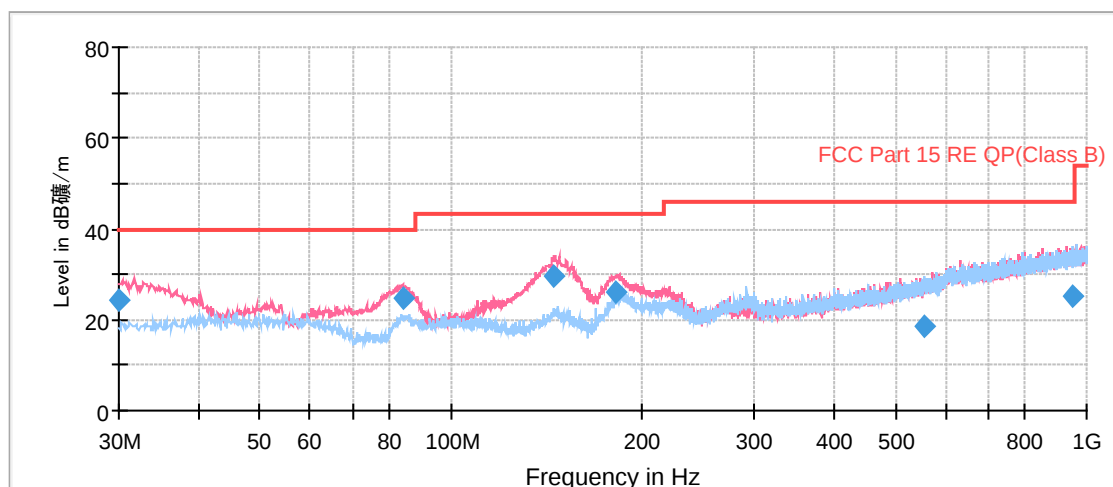


Radiates Emission from 30MHz to 1GHz

| Frequency (MHz) | Quasi-Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 30.040000       | 24.1                | 100.0       | V            | 0.0           | 36.0                   | -11.9               | 15.9        | 40.0           |
| 84.395000       | 24.5                | 100.0       | V            | 66.0          | 34.5                   | -10.0               | 15.5        | 40.0           |
| 145.070000      | 29.7                | 100.0       | V            | 249.0         | 38.7                   | -9.0                | 13.8        | 43.5           |
| 182.172500      | 25.9                | 100.0       | V            | 188.0         | 36.9                   | -11.0               | 17.6        | 43.5           |
| 556.186250      | 18.7                | 100.0       | H            | 0.0           | 39.9                   | -21.2               | 27.3        | 46.0           |
| 950.576250      | 25.1                | 100.0       | H            | 101.0         | 51.1                   | -26.0               | 20.9        | 46.0           |

- Remark: 1. Quasi-Peak = Reading value + Correction factor  
2. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)  
3. Margin = Limit – Quasi-Peak

## RE 1G-3GHz PK+AV Class B

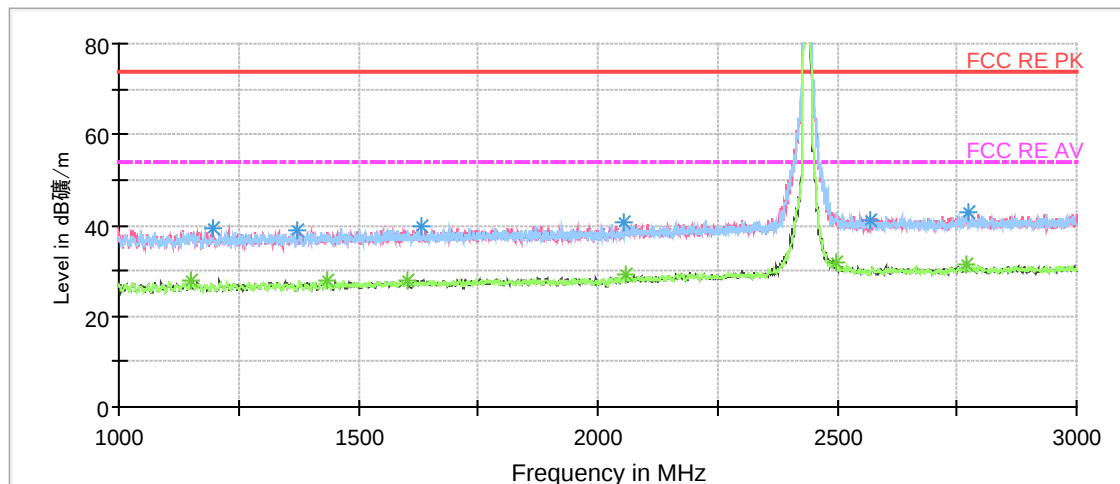

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz


| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1195.000000     | 39.3          | 100.0       | V            | 0.0           | 50.0                   | -10.7               | 34.7        | 74             |
| 1372.500000     | 39.1          | 100.0       | H            | 74.0          | 49.0                   | -9.9                | 34.9        | 74             |
| 1633.000000     | 39.7          | 100.0       | H            | 177.0         | 48.6                   | -8.9                | 34.3        | 74             |
| 2053.500000     | 40.5          | 100.0       | H            | 250.0         | 47.9                   | -7.4                | 33.5        | 74             |
| 2569.000000     | 41.2          | 100.0       | V            | 234.0         | 46.0                   | -4.8                | 32.8        | 74             |
| 2774.500000     | 42.7          | 100.0       | V            | 244.0         | 46.9                   | -4.2                | 31.3        | 74             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1150.000000     | 27.7             | 100.0       | H            | 0.0           | 38.5                   | -10.8               | 26.3        | 54             |
| 1437.000000     | 27.7             | 100.0       | H            | 1.0           | 37.4                   | -9.7                | 26.3        | 54             |
| 1602.000000     | 27.9             | 100.0       | H            | 5.0           | 36.9                   | -9.0                | 26.1        | 54             |
| 2057.500000     | 29.0             | 100.0       | V            | 0.0           | 36.4                   | -7.4                | 25.0        | 54             |
| 2498.500000     | 31.7             | 100.0       | H            | 2.0           | 36.7                   | -5.0                | 22.3        | 54             |
| 2768.000000     | 31.2             | 100.0       | V            | 285.0         | 35.5                   | -4.3                | 22.8        | 54             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 3-18GHz PK+AV

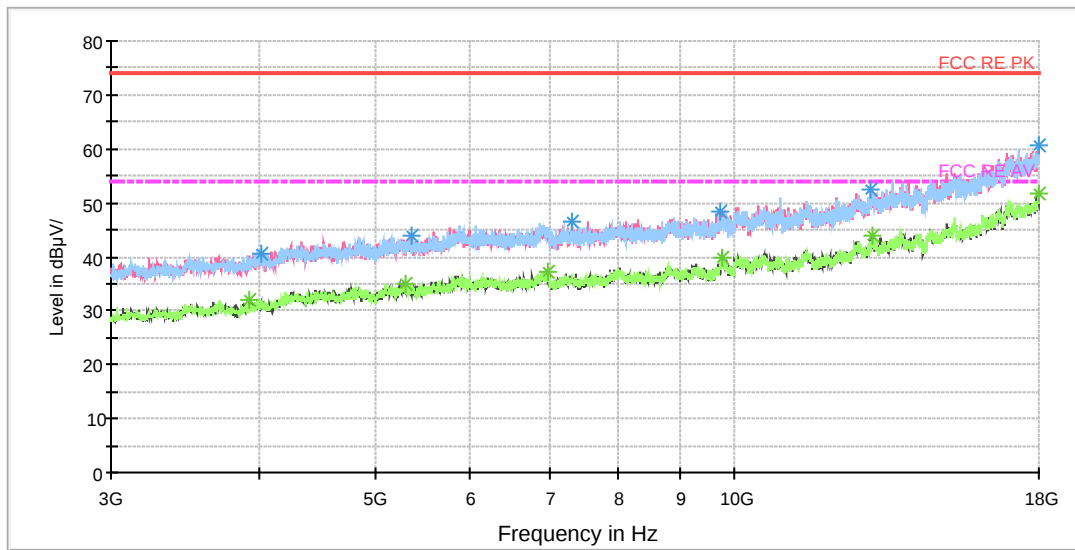

Radiates Emission from 3GHz to 18GHz


| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 3924.375000     | 40.0          | 100.0       | V            | 0.0           | 40.0                   | -0.0                | 34.0        | 74             |
| 5304.375000     | 42.1          | 100.0       | H            | 38.0          | 45.9                   | -3.8                | 31.9        | 74             |
| 6965.625000     | 43.8          | 100.0       | H            | 0.0           | 50.4                   | -6.6                | 30.2        | 74             |
| 9783.750000     | 46.3          | 100.0       | V            | 334.0         | 58.4                   | -12.1               | 27.7        | 74             |
| 13042.500000    | 50.3          | 100.0       | V            | 262.0         | 66.5                   | -16.2               | 23.7        | 74             |
| 17990.625000    | 60.8          | 100.0       | V            | 262.0         | 86.1                   | -25.3               | 13.2        | 74             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 3924.375000     | 31.9             | 100.0       | V            | 0.0           | 31.9                   | -0.0                | 22.1        | 54             |
| 5304.375000     | 34.9             | 100.0       | H            | 38.0          | 38.7                   | -3.8                | 19.1        | 54             |
| 6965.625000     | 37.1             | 100.0       | H            | 0.0           | 43.7                   | -6.6                | 16.9        | 54             |
| 9783.750000     | 39.9             | 100.0       | V            | 334.0         | 52.0                   | -12.1               | 14.1        | 54             |
| 13042.500000    | 43.8             | 100.0       | V            | 262.0         | 60.0                   | -16.2               | 10.2        | 54             |
| 17990.625000    | 51.9             | 100.0       | V            | 262.0         | 77.2                   | -25.3               | 2.1         | 54             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## RE 18-26.5GHz PK+AV

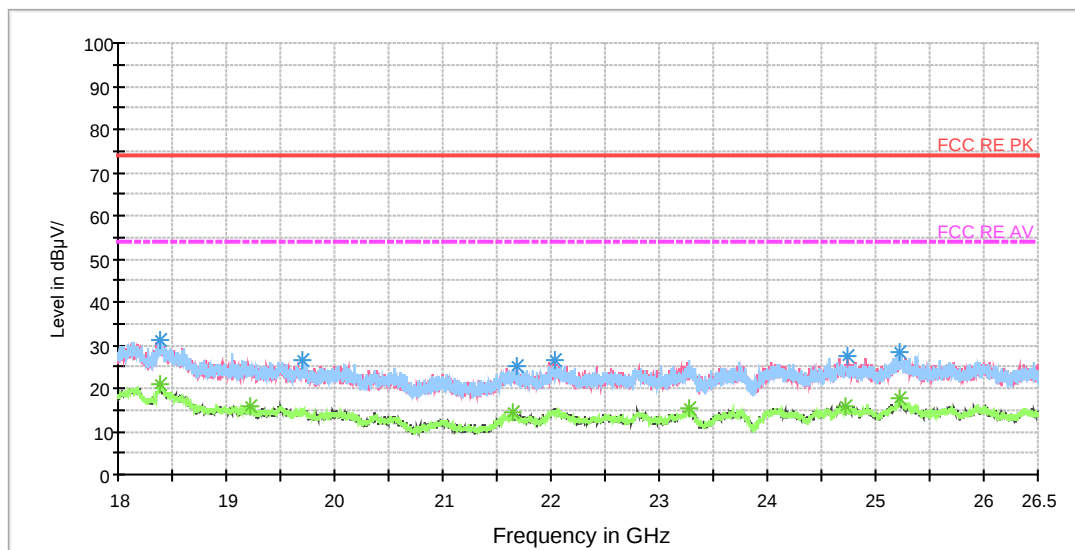

## Radiates Emission from 18GHz to 26.5GHz

| Frequency (MHz) | Peak (dBuV/m) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 18394.187500    | 31.2          | V            | 0.0           | 36.1                   | -4.9                | 42.8        | 74             |
| 19696.812500    | 26.7          | V            | 0.0           | 34.4                   | -7.7                | 47.3        | 74             |
| 21694.312500    | 25.1          | V            | 0.0           | 34.4                   | -9.3                | 48.9        | 74             |
| 22035.375000    | 26.7          | V            | 0.0           | 34.7                   | -8.0                | 47.3        | 74             |
| 24738.375000    | 27.4          | V            | 0.0           | 33.8                   | -6.4                | 46.6        | 74             |
| 25213.312500    | 28.5          | H            | 0.0           | 34.7                   | -6.2                | 45.5        | 74             |


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 18384.625000    | 20.8             | H            | 0.0           | 25.6                   | -4.8                | 33.2        | 54             |
| 19229.312500    | 15.9             | V            | 0.0           | 22.7                   | -6.8                | 38.1        | 54             |
| 21649.687500    | 14.2             | V            | 0.0           | 23.4                   | -9.2                | 39.8        | 54             |
| 23283.812500    | 15.4             | V            | 0.0           | 22.5                   | -7.1                | 38.6        | 54             |
| 24724.562500    | 16.0             | V            | 0.0           | 22.2                   | -6.2                | 38.0        | 54             |
| 25219.687500    | 17.8             | H            | 0.0           | 23.8                   | -6.0                | 36.2        | 54             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## 802.11g CH11

RE 0.03-1GHz QP Class B

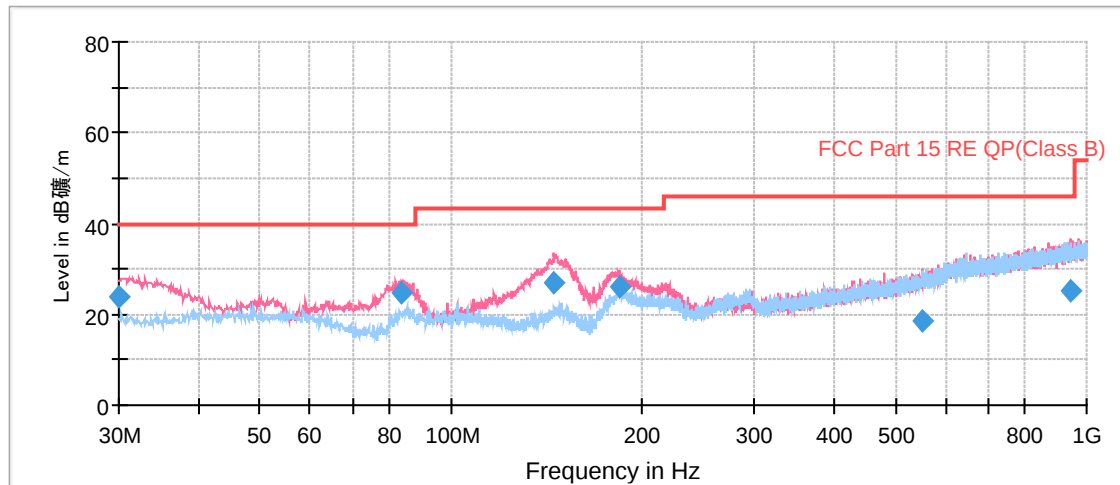

Radiates Emission from 30MHz to 1GHz


| Frequency (MHz) | Quasi-Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 30.046250       | 24.1                | 100.0       | V            | 6.0           | 36.0                   | -11.9               | 15.9        | 40.0           |
| 83.425000       | 24.6                | 100.0       | V            | 91.0          | 34.3                   | -9.7                | 15.4        | 40.0           |
| 145.186250      | 27.2                | 100.0       | V            | 252.0         | 36.2                   | -9.0                | 16.3        | 43.5           |
| 183.993750      | 25.9                | 100.0       | V            | 202.0         | 37.0                   | -11.1               | 17.6        | 43.5           |
| 552.382500      | 18.5                | 100.0       | V            | 358.0         | 39.6                   | -21.1               | 27.5        | 46.0           |
| 941.635000      | 25.1                | 100.0       | V            | 232.0         | 51.1                   | -26.0               | 20.9        | 46.0           |

Remark: 1. Quasi-Peak = Reading value + Correction factor

2. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)

3. Margin = Limit – Quasi-Peak

## RE 1G-3GHz PK+AV Class B

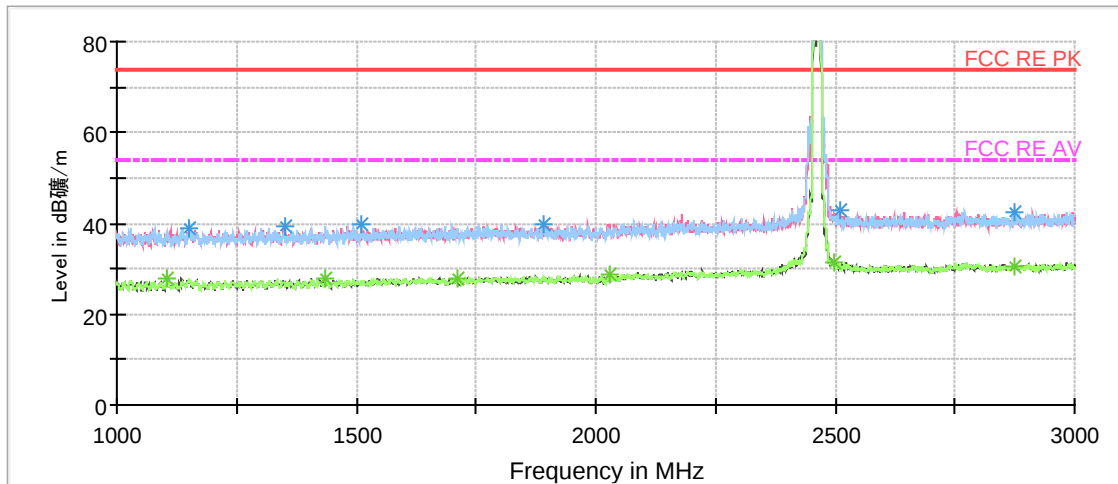

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz


| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1151.000000     | 39.1          | 100.0       | H            | 10.0          | 49.9                   | -10.8               | 34.9        | 74             |
| 1351.000000     | 39.2          | 100.0       | V            | 306.0         | 49.2                   | -10.0               | 34.8        | 74             |
| 1509.500000     | 40.0          | 100.0       | H            | 172.0         | 49.4                   | -9.4                | 34.0        | 74             |
| 1892.500000     | 39.9          | 100.0       | V            | 214.0         | 48.0                   | -8.1                | 34.1        | 74             |
| 2510.500000     | 42.8          | 100.0       | V            | 26.0          | 47.8                   | -5.0                | 31.2        | 74             |
| 2875.000000     | 42.4          | 100.0       | H            | 38.0          | 46.6                   | -4.2                | 31.6        | 74             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1106.000000     | 27.9             | 100.0       | V            | 359.0         | 38.9                   | -11.0               | 26.1        | 54             |
| 1436.000000     | 27.7             | 100.0       | H            | 48.0          | 37.4                   | -9.7                | 26.3        | 54             |
| 1712.000000     | 28.0             | 100.0       | H            | 69.0          | 36.7                   | -8.7                | 26.0        | 54             |
| 2027.500000     | 28.9             | 100.0       | H            | 121.0         | 36.5                   | -7.6                | 25.1        | 54             |
| 2499.000000     | 31.3             | 100.0       | H            | 1.0           | 36.3                   | -5.0                | 22.7        | 54             |
| 2875.500000     | 30.6             | 100.0       | V            | 317.0         | 34.8                   | -4.2                | 23.4        | 54             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## RE 3-18GHz PK+AV

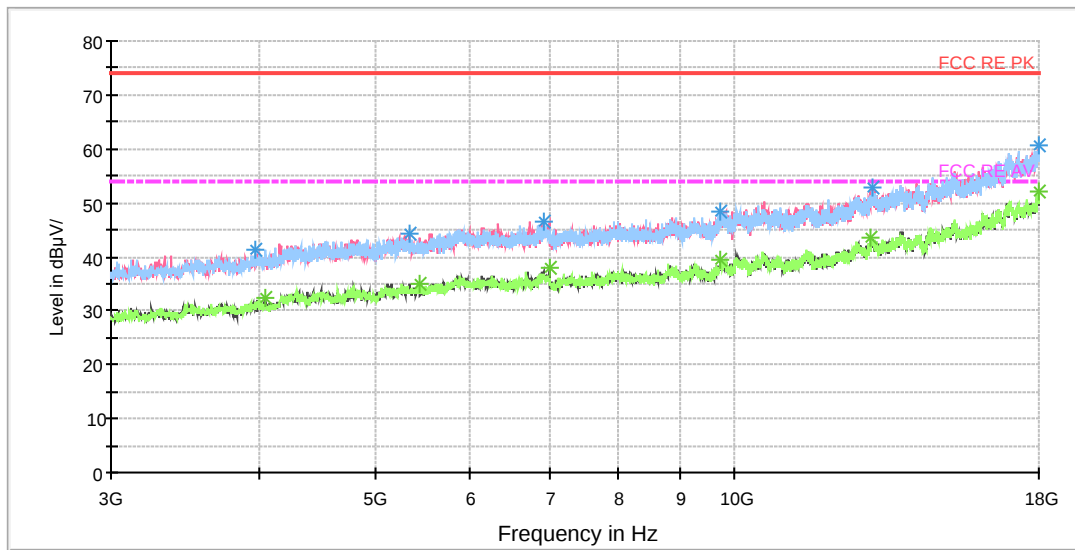

## Radiates Emission from 3GHz to 18GHz


| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 4038.750000     | 39.2          | 100.0       | V            | 125.0         | 39.8                   | -0.6                | 34.8        | 74             |
| 5445.000000     | 43.5          | 100.0       | V            | 350.0         | 47.3                   | -3.8                | 30.5        | 74             |
| 6988.125000     | 46.1          | 100.0       | V            | 215.0         | 52.6                   | -6.5                | 27.9        | 74             |
| 9738.750000     | 46.0          | 100.0       | V            | 264.0         | 57.5                   | -11.5               | 28.0        | 74             |
| 13012.500000    | 51.1          | 100.0       | H            | 141.0         | 67.3                   | -16.2               | 22.9        | 74             |
| 17994.375000    | 57.7          | 100.0       | H            | 203.0         | 83.0                   | -25.3               | 16.3        | 74             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 4038.750000     | 32.3             | 100.0       | V            | 125.0         | 32.9                   | -0.6                | 21.7        | 54             |
| 5445.000000     | 35.0             | 100.0       | V            | 350.0         | 38.8                   | -3.8                | 19.0        | 54             |
| 6988.125000     | 38.0             | 100.0       | V            | 215.0         | 44.5                   | -6.5                | 16.0        | 54             |
| 9738.750000     | 39.4             | 100.0       | V            | 264.0         | 50.9                   | -11.5               | 14.6        | 54             |
| 13012.500000    | 43.5             | 100.0       | H            | 141.0         | 59.7                   | -16.2               | 10.5        | 54             |
| 17994.375000    | 52.2             | 100.0       | H            | 203.0         | 77.5                   | -25.3               | 1.8         | 54             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## RE 18-26.5GHz PK+AV

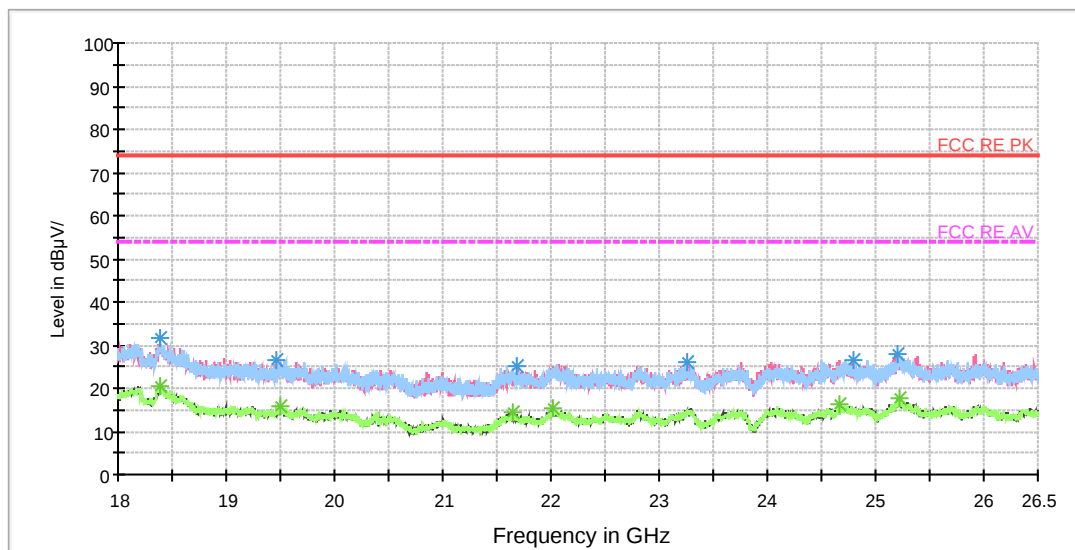

## Radiates Emission from 18GHz to 26.5GHz

| Frequency (MHz) | Peak (dBuV/m) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 18382.500000    | 31.5          | V            | 0.0           | 36.3                   | -4.8                | 42.5        | 74             |
| 19466.250000    | 26.4          | H            | 0.0           | 34.5                   | -8.1                | 47.6        | 74             |
| 21683.687500    | 25.0          | H            | 0.0           | 34.4                   | -9.4                | 49.0        | 74             |
| 23259.375000    | 25.9          | H            | 0.0           | 33.3                   | -7.4                | 48.1        | 74             |
| 24791.500000    | 26.6          | V            | 0.0           | 33.3                   | -6.7                | 47.4        | 74             |
| 25212.250000    | 28.1          | V            | 0.0           | 34.3                   | -6.2                | 45.9        | 74             |


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 18383.562500    | 20.5             | V            | 0.0           | 25.3                   | -4.8                | 33.5        | 54             |
| 19508.750000    | 15.8             | H            | 0.0           | 23.3                   | -7.5                | 38.2        | 54             |
| 21651.812500    | 14.3             | H            | 0.0           | 23.5                   | -9.2                | 39.7        | 54             |
| 22014.125000    | 15.3             | V            | 0.0           | 23.4                   | -8.1                | 38.7        | 54             |
| 24665.062500    | 16.1             | H            | 0.0           | 23.2                   | -7.1                | 37.9        | 54             |
| 25222.875000    | 17.7             | H            | 0.0           | 23.6                   | -5.9                | 36.3        | 54             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

# 802.11n (HT20) CH1

RE 0.03-1GHz QP Class B

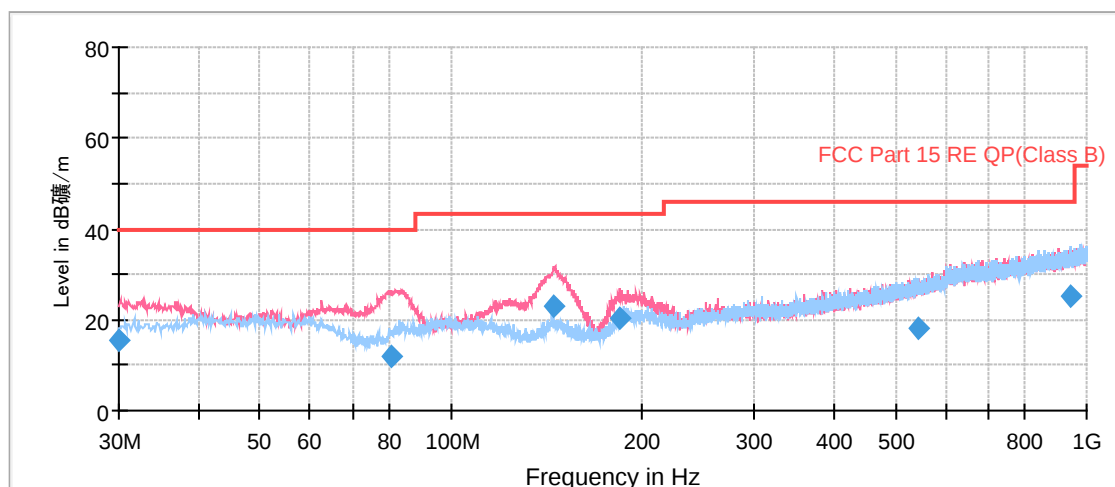


Radiates Emission from 30MHz to 1GHz

| Frequency (MHz) | Quasi-Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 30.000000       | 15.4                | 100.0       | V            | 316.0         | 27.3                   | -11.9               | 24.6        | 40.0           |
| 80.313750       | 12.0                | 100.0       | V            | 56.0          | 20.7                   | -8.7                | 28.0        | 40.0           |
| 145.267500      | 23.0                | 100.0       | V            | 247.0         | 32.0                   | -9.0                | 20.5        | 43.5           |
| 184.466250      | 20.5                | 100.0       | V            | 196.0         | 31.6                   | -11.1               | 23.0        | 43.5           |
| 542.883750      | 18.3                | 100.0       | V            | 0.0           | 39.2                   | -20.9               | 27.7        | 46.0           |
| 943.502500      | 25.2                | 100.0       | H            | 0.0           | 51.2                   | -26.0               | 20.8        | 46.0           |

- Remark: 1. Quasi-Peak = Reading value + Correction factor  
2. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)  
3. Margin = Limit – Quasi-Peak

## RE 1G-3GHz PK+AV Class B

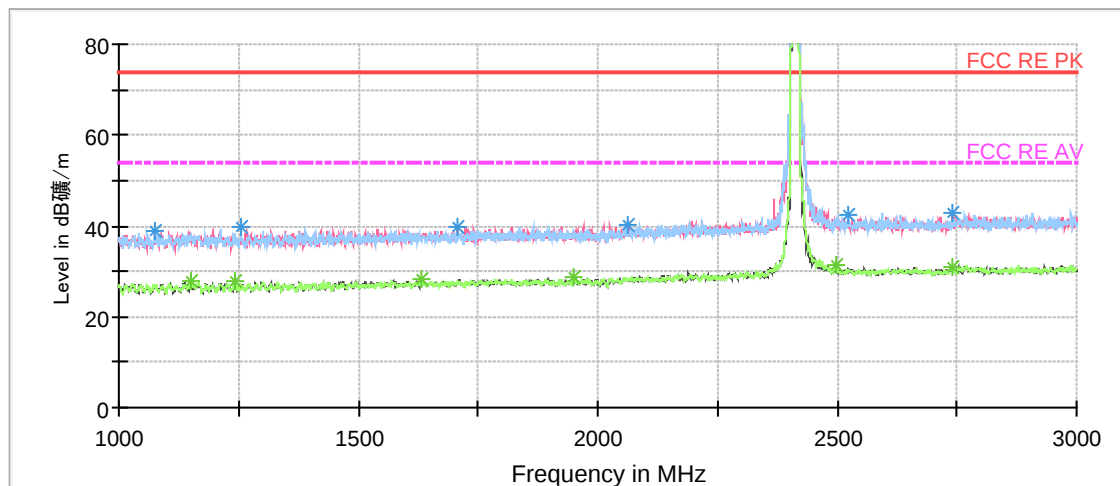

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz


| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1075.000000     | 38.7          | 100.0       | V            | 354.0         | 49.8                   | -11.1               | 35.3        | 74             |
| 1256.500000     | 39.9          | 100.0       | H            | 5.0           | 50.3                   | -10.4               | 34.1        | 74             |
| 1708.500000     | 40.0          | 100.0       | V            | 74.0          | 48.7                   | -8.7                | 34.0        | 74             |
| 2061.000000     | 40.4          | 100.0       | H            | 2.0           | 47.8                   | -7.4                | 33.6        | 74             |
| 2523.500000     | 42.4          | 100.0       | H            | 17.0          | 47.3                   | -4.9                | 31.6        | 74             |
| 2739.500000     | 43.1          | 100.0       | V            | 168.0         | 47.5                   | -4.4                | 30.9        | 74             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1151.500000     | 28.1             | 100.0       | H            | 7.0           | 38.9                   | -10.8               | 25.9        | 54             |
| 1242.000000     | 27.7             | 100.0       | H            | 11.0          | 38.1                   | -10.4               | 26.3        | 54             |
| 1632.500000     | 28.3             | 100.0       | H            | 104.0         | 37.2                   | -8.9                | 25.7        | 54             |
| 1951.500000     | 28.9             | 100.0       | H            | 63.0          | 36.9                   | -8.0                | 25.1        | 54             |
| 2498.500000     | 31.3             | 100.0       | V            | 0.0           | 36.3                   | -5.0                | 22.7        | 54             |
| 2742.000000     | 30.9             | 100.0       | V            | 158.0         | 35.3                   | -4.4                | 23.1        | 54             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## RE 3-18GHz PK+AV

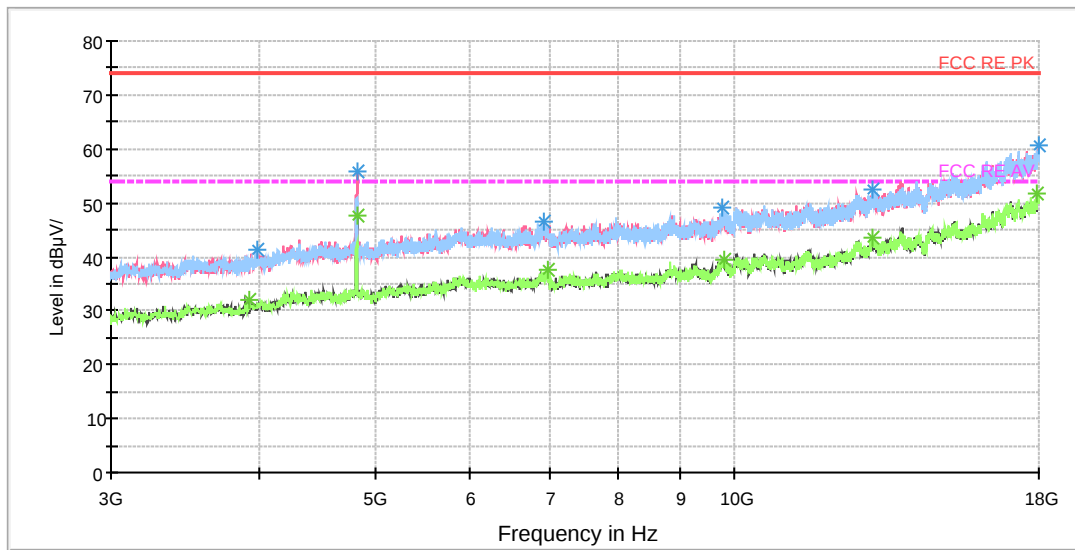

## Radiates Emission from 3GHz to 18GHz


| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 3920.625000     | 38.0          | 100.0       | V            | 95.0          | 38.1                   | -0.1                | 36.0        | 74             |
| 4822.500000     | 54.9          | 100.0       | V            | 0.0           | 57.6                   | -2.7                | 19.1        | 74             |
| 6961.875000     | 45.1          | 100.0       | H            | 110.0         | 51.7                   | -6.6                | 28.9        | 74             |
| 9808.125000     | 45.7          | 100.0       | H            | 22.0          | 57.9                   | -12.2               | 28.3        | 74             |
| 13063.125000    | 50.6          | 100.0       | V            | 183.0         | 66.8                   | -16.2               | 23.4        | 74             |
| 17958.750000    | 59.0          | 100.0       | V            | 302.0         | 83.9                   | -24.9               | 15.0        | 74             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 3920.625000     | 32.0             | 100.0       | V            | 95.0          | 32.1                   | -0.1                | 22.0        | 54             |
| 4822.500000     | 47.7             | 100.0       | V            | 0.0           | 50.4                   | -2.7                | 6.3         | 54             |
| 6961.875000     | 37.4             | 100.0       | H            | 110.0         | 44.0                   | -6.6                | 16.6        | 54             |
| 9808.125000     | 39.6             | 100.0       | H            | 22.0          | 51.8                   | -12.2               | 14.4        | 54             |
| 13063.125000    | 43.6             | 100.0       | V            | 183.0         | 59.8                   | -16.2               | 10.4        | 54             |
| 17958.750000    | 51.7             | 100.0       | V            | 302.0         | 76.6                   | -24.9               | 2.3         | 54             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## RE 18-26.5GHz PK+AV

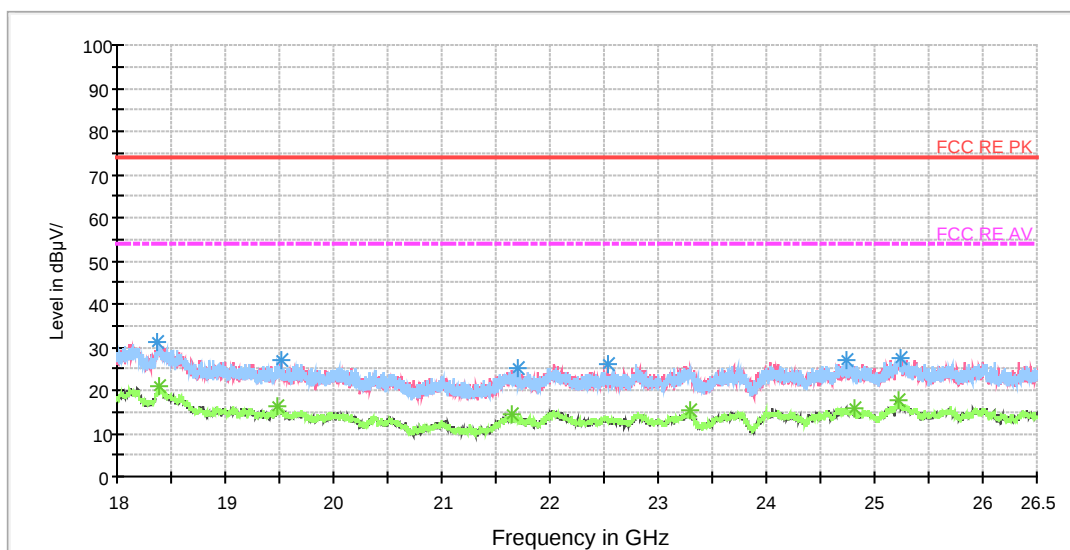

## Radiates Emission from 18GHz to 26.5GHz

| Frequency (MHz) | Peak (dBuV/m) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 18364.437500    | 31.4          | V            | 0.0           | 36.3                   | -4.9                | 42.6        | 74             |
| 19524.687500    | 27.1          | V            | 0.0           | 34.5                   | -7.4                | 46.9        | 74             |
| 21702.812500    | 25.2          | V            | 0.0           | 34.5                   | -9.3                | 48.8        | 74             |
| 22528.375000    | 26.0          | V            | 0.0           | 34.2                   | -8.2                | 48.0        | 74             |
| 24734.125000    | 26.9          | H            | 0.0           | 33.2                   | -6.3                | 47.1        | 74             |
| 25234.562500    | 27.4          | V            | 0.0           | 33.4                   | -6.0                | 46.6        | 74             |


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 18391.000000    | 20.8             | H            | 0.0           | 25.7                   | -4.9                | 33.2        | 54             |
| 19487.500000    | 16.1             | H            | 0.0           | 23.8                   | -7.7                | 37.9        | 54             |
| 21641.187500    | 14.4             | V            | 0.0           | 23.5                   | -9.1                | 39.6        | 54             |
| 23292.312500    | 15.4             | V            | 0.0           | 22.4                   | -7.0                | 38.6        | 54             |
| 24807.437500    | 15.9             | V            | 0.0           | 22.6                   | -6.7                | 38.1        | 54             |
| 25227.125000    | 17.8             | H            | 0.0           | 23.7                   | -5.9                | 36.2        | 54             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## 802.11n (HT20) CH6

RE 0.03-1GHz QP Class B

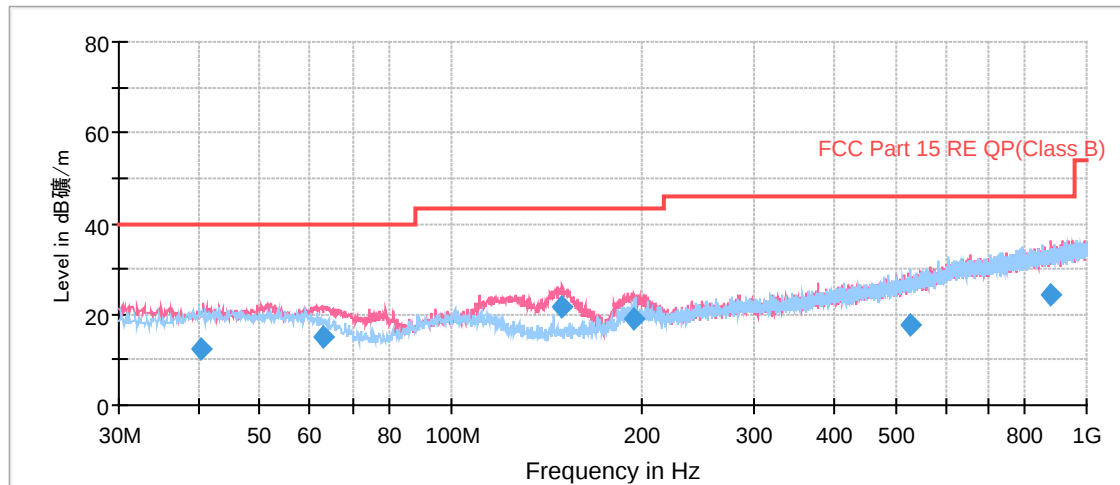

Radiates Emission from 30MHz to 1GHz


| Frequency (MHz) | Quasi-Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 40.511250       | 12.3                | 100.0       | V            | 356.0         | 25.5                   | 13.2                | 27.7        | 40.0           |
| 62.973750       | 14.9                | 100.0       | V            | 179.0         | 26.2                   | 11.3                | 25.1        | 40.0           |
| 149.515000      | 21.7                | 100.0       | V            | 254.0         | 30.8                   | 9.1                 | 21.8        | 43.5           |
| 193.277500      | 18.9                | 100.0       | V            | 0.0           | 30.5                   | 11.6                | 24.6        | 43.5           |
| 528.778750      | 17.9                | 100.0       | H            | 42.0          | 38.4                   | 20.5                | 28.1        | 46.0           |
| 880.650000      | 24.4                | 100.0       | V            | 79.0          | 49.8                   | 25.4                | 21.6        | 46.0           |

Remark: 1. Quasi-Peak = Reading value + Correction factor

2. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)

3. Margin = Limit – Quasi-Peak

## RE 1G-3GHz PK+AV Class B

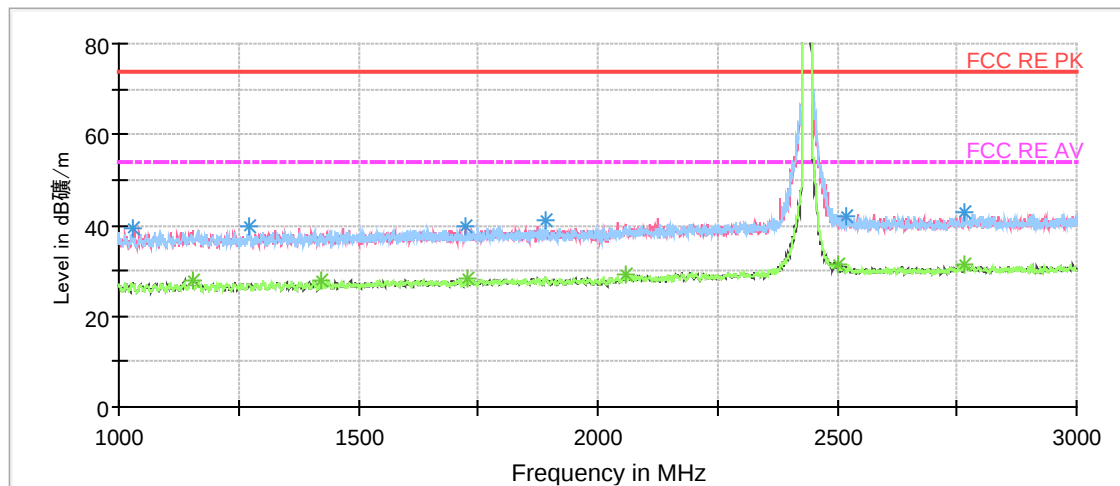

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz


| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1030.000000     | 39.2          | 100.0       | H            | 260.0         | 50.5                   | -11.3               | 34.8        | 74             |
| 1274.000000     | 39.9          | 100.0       | H            | 136.0         | 50.2                   | -10.3               | 34.1        | 74             |
| 1725.500000     | 39.8          | 100.0       | V            | 322.0         | 48.4                   | -8.6                | 34.2        | 74             |
| 1892.500000     | 41.0          | 100.0       | H            | 156.0         | 49.1                   | -8.1                | 33.0        | 74             |
| 2520.000000     | 41.8          | 100.0       | V            | 345.0         | 46.7                   | -4.9                | 32.2        | 74             |
| 2766.500000     | 43.0          | 100.0       | V            | 157.0         | 47.3                   | -4.3                | 31.0        | 74             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1153.500000     | 27.9             | 100.0       | H            | 324.0         | 38.7                   | -10.8               | 26.1        | 54             |
| 1422.500000     | 27.7             | 100.0       | V            | 209.0         | 37.5                   | -9.8                | 26.3        | 54             |
| 1729.000000     | 28.1             | 100.0       | H            | 63.0          | 36.7                   | -8.6                | 25.9        | 54             |
| 2057.500000     | 29.0             | 100.0       | V            | 332.0         | 36.4                   | -7.4                | 25.0        | 54             |
| 2501.000000     | 31.5             | 100.0       | H            | 0.0           | 36.5                   | -5.0                | 22.5        | 54             |
| 2766.000000     | 31.3             | 100.0       | V            | 332.0         | 35.6                   | -4.3                | 22.7        | 54             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 3-18GHz PK+AV

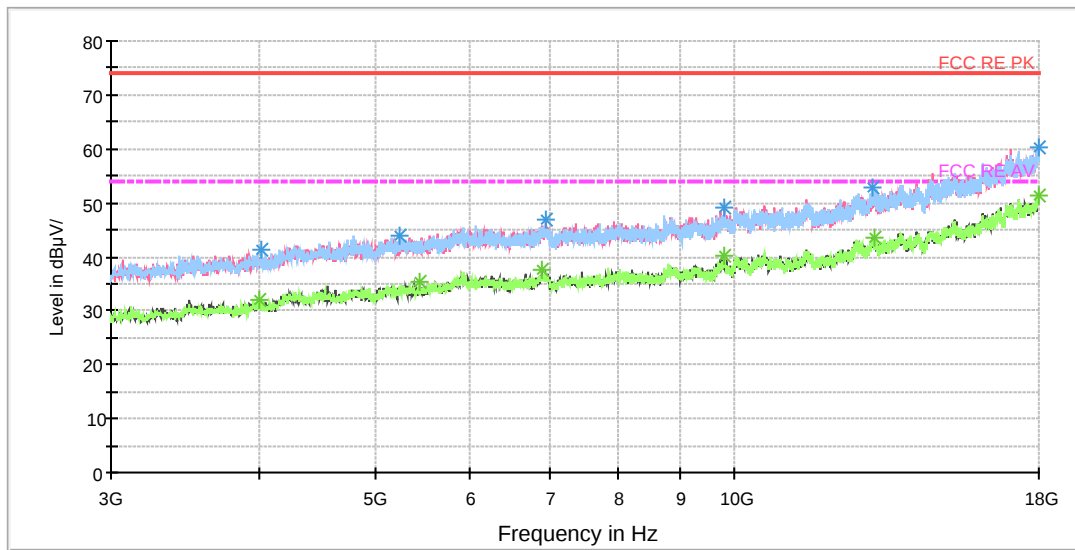

Radiates Emission from 3GHz to 18GHz

| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 3993.750000     | 39.4          | 100.0       | H            | 38.0          | 39.9                   | -0.5                | 34.6        | 74             |
| 5450.625000     | 42.7          | 100.0       | H            | 25.0          | 46.6                   | -3.9                | 31.3        | 74             |
| 6892.500000     | 44.1          | 100.0       | V            | 117.0         | 51.0                   | -6.9                | 29.9        | 74             |
| 9798.750000     | 47.9          | 100.0       | H            | 222.0         | 60.2                   | -12.3               | 26.1        | 74             |
| 13089.375000    | 52.3          | 100.0       | H            | 198.0         | 68.5                   | -16.2               | 21.7        | 74             |
| 17968.125000    | 57.5          | 100.0       | H            | 85.0          | 82.5                   | -25.0               | 16.5        | 74             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 3993.750000     | 32.1             | 100.0       | H            | 38.0          | 32.6                   | -0.5                | 21.9        | 54             |
| 5450.625000     | 35.3             | 100.0       | H            | 25.0          | 39.2                   | -3.9                | 18.7        | 54             |
| 6892.500000     | 37.7             | 100.0       | V            | 117.0         | 44.6                   | -6.9                | 16.3        | 54             |
| 9798.750000     | 40.0             | 100.0       | H            | 222.0         | 52.3                   | -12.3               | 14.0        | 54             |
| 13089.375000    | 43.5             | 100.0       | H            | 198.0         | 59.7                   | -16.2               | 10.5        | 54             |
| 17968.125000    | 51.3             | 100.0       | H            | 85.0          | 76.3                   | 25.0                | 2.7         | 54             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)