



A D T

FCC TEST REPORT (15.247)

REPORT NO.: RF130829C04

MODEL NO.: C7

FCC ID: TE7C7V2

RECEIVED: Aug. 27, 2013

TESTED: Dec. 02, 2013 ~ Mar. 05, 2014

ISSUED: Mar. 06, 2014

APPLICANT: TP-LINK TECHNOLOGIES CO., LTD.

ADDRESS: Building 24 (floors 1,3,4,5) and 28 (floors1-4)
Central Science and Technology Park, Shennan
Rd, Nanshan, Shenzhen, China

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist.,
New Taipei City, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



A D T

TABLE OF CONTENTS

RELEASE CONTROL RECORD.....	5
1. CERTIFICATION.....	6
2. SUMMARY OF TEST RESULTS	7
2.1 MEASUREMENT UNCERTAINTY.....	7
3. GENERAL INFORMATION.....	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	10
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	11
3.3 DESCRIPTION OF SUPPORT UNITS	17
3.3.1 CONFIGURATION OF SYSTEM UNDER TEST	17
3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS	18
4. TEST TYPES AND RESULTS (FOR 2.4GHz BAND)	19
4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT	19
4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	19
4.1.2 TEST INSTRUMENTS.....	20
4.1.3 TEST PROCEDURES	21
4.1.4 DEVIATION FROM TEST STANDARD.....	21
4.1.5 TEST SETUP.....	22
4.1.6 EUT OPERATING CONDITIONS	23
4.1.7 TEST RESULTS	24
4.2 CONDUCTED EMISSION MEASUREMENT	37
4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	37
4.2.2 TEST INSTRUMENTS.....	37
4.2.3 TEST PROCEDURES	38
4.2.4 DEVIATION FROM TEST STANDARD.....	38
4.2.5 TEST SETUP.....	38
4.2.6 EUT OPERATING CONDITIONS	38
4.2.7 TEST RESULTS	39
4.3 6dB BANDWIDTH MEASUREMENT.....	41
4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT	41
4.3.2 TEST SETUP.....	41
4.3.3 TEST INSTRUMENTS.....	41
4.3.4 TEST PROCEDURE.....	41
4.3.5 DEVIATION FROM TEST STANDARD.....	41
4.3.6 EUT OPERATING CONDITIONS	41
4.3.7 TEST RESULTS	42



4.4	CONDUCTED OUTPUT POWER.....	44
4.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	44
4.4.2	TEST SETUP	44
4.4.3	TEST INSTRUMENTS.....	44
4.4.4	TEST PROCEDURES	44
4.4.5	DEVIATION FROM TEST STANDARD.....	45
4.4.6	EUT OPERATING CONDITIONS	45
4.4.7	TEST RESULTS	46
4.5	POWER SPECTRAL DENSITY MEASUREMENT	47
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	47
4.5.2	TEST SETUP.....	47
4.5.3	TEST INSTRUMENTS.....	47
4.5.4	TEST PROCEDURE.....	47
4.5.5	DEVIATION FROM TEST STANDARD.....	47
4.5.6	EUT OPERATING CONDITION.....	47
4.5.7	TEST RESULTS	48
4.6	CONDUCTED OUT OF BAND EMISSION MEASUREMENT.....	51
4.6.1	LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT	51
4.6.2	TEST SETUP.....	51
4.6.3	TEST INSTRUMENTS.....	51
4.6.4	TEST PROCEDURE.....	51
4.6.5	DEVIATION FROM TEST STANDARD.....	52
4.6.6	EUT OPERATING CONDITION.....	52
4.6.7	TEST RESULTS	52
5.	TEST TYPES AND RESULTS (FOR 5.0GHz BAND).....	65
5.1	RADIATED EMISSION MEASUREMENT	65
5.1.1	LIMITS OF RADIATED EMISSION MEASUREMENT	65
5.1.2	TEST INSTRUMENTS.....	66
5.1.3	TEST PROCEDURES	66
5.1.4	DEVIATION FROM TEST STANDARD.....	66
5.1.5	TEST SETUP.....	66
5.1.6	EUT OPERATING CONDITIONS	66
5.1.7	TEST RESULTS	67
5.2	CONDUCTED EMISSION MEASUREMENT	77
5.2.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	77
5.2.2	TEST INSTRUMENTS.....	77
5.2.3	TEST PROCEDURES	77
5.2.4	DEVIATION FROM TEST STANDARD.....	77
5.2.5	TEST SETUP.....	77



A D T

5.2.6	EUT OPERATING CONDITIONS	77
5.2.7	TEST RESULTS	78
5.3	6dB BANDWIDTH MEASUREMENT	80
5.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	80
5.3.2	TEST SETUP	80
5.3.3	TEST INSTRUMENTS.....	80
5.3.4	TEST PROCEDURE.....	80
5.3.5	DEVIATION FROM TEST STANDARD.....	80
5.3.6	EUT OPERATING CONDITIONS	80
5.3.7	TEST RESULTS	81
5.4	CONDUCTED OUTPUT POWER.....	83
5.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	83
5.4.2	TEST SETUP	83
5.4.3	INSTRUMENTS.....	83
5.4.4	TEST PROCEDURES	84
5.4.5	DEVIATION FROM TEST STANDARD.....	84
5.4.6	EUT OPERATING CONDITIONS	84
5.4.7	TEST RESULTS	85
5.5	POWER SPECTRAL DENSITY MEASUREMENT	86
5.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	86
5.5.2	TEST SETUP.....	86
5.5.3	TEST INSTRUMENTS.....	86
5.5.4	TEST PROCEDURE.....	86
5.5.5	DEVIATION FROM TEST STANDARD.....	86
5.5.6	EUT OPERATING CONDITION.....	86
5.5.7	TEST RESULTS	87
5.6	CONDUCTED OUT OF BAND EMISSION MEASUREMENT	90
5.6.1	LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT	90
5.6.2	TEST SETUP.....	90
5.6.3	TEST INSTRUMENTS.....	90
5.6.4	TEST PROCEDURE.....	90
5.6.5	DEVIATION FROM TEST STANDARD.....	90
5.6.6	EUT OPERATING CONDITION.....	90
5.6.7	TEST RESULTS	90
6.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	103
7.	INFORMATION ON THE TESTING LABORATORIES	104
8.	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	105



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF130829C04	Original release	Mar. 06, 2014



A D T

1. CERTIFICATION

PRODUCT: AC1750 Wireless Dual Band Gigabit Router
MODEL NO.: C7
BRAND: TP-LINK
APPLICANT: TP-LINK TECHNOLOGIES CO., LTD.
TESTED: Dec. 02, 2013 ~ Mar. 05, 2014
TEST SAMPLE: PRODUCTION SAMPLE
STANDARDS: **FCC Part 15, Subpart C (Section 15.247)**
ANSI C63.10-2009

The above equipment (model: C7) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Celine Chou , **DATE :** Mar. 06, 2014
Celine Chou / Specialist

APPROVED BY : Ken Liu , **DATE :** Mar. 06, 2014
Ken Liu / Senior Manager



2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -19.06dB at 0.15782MHz.
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -0.2dB at 2390.00MHz.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector for PIFA antenna and RP-SMA-F antenna connector for Dipole antenna is not standard connector.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.34 dB
	200MHz ~ 1000MHz	3.35 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	AC1750 Wireless Dual Band Gigabit Router
MODEL NO.	C7
POWER SUPPLY	12Vdc (Adapter)
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 256QAM, 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b:11.0/ 5.5/ 2.0/ 1.0Mbps 802.11g: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 450.0Mbps 802.11ac: up to 1300.0Mbps
OPERATING FREQUENCY	2.4GHz: 2412 ~ 2462MHz 5.0GHz: 5745 ~ 5825MHz
NUMBER OF CHANNEL	2.4GHz: 11 for 802.11b, 802.11g, 802.11n (20MHz) 7 for 802.11n (40MHz) 5.0GHz: 5 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz) 1 for 802.11ac (80MHz)
OUTPUT POWER	386.557mW for 2412 ~ 2462MHz 145.616mW for 5745 ~ 5825MHz
ANTENNA TYPE	Refer to note
ANTENNA CONNECTOR	Refer to note
DATA CABLE	NA
I/O PORTS	Refer to user's manual
ACCESSORY DEVICES	Adapter



NOTE:

1. The EUT incorporates a MIMO function. Physically, the EUT provides three completed transmitters and three receivers.

MODULATION MODE	TX FUNCTION
802.11b	3TX
802.11g	3TX
802.11a	3TX
802.11n (20MHz)	3TX
802.11n (40MHz)	3TX
802.11ac (80MHz)	3TX

2. The EUT with follow antennas gain is listed as table below.

Frequency	Ant.	Type	Gain(dBi)	Connector
2.4GHz	1	PIFA	3.81	NA
	2	PIFA	2.44	NA
	3	PIFA	3.67	NA
5GHz	4 ~ 6	Dipole	4.1	RP-SMA-F

3. The EUT consumes power from the following adapter.

BRAND:	Ten Pao International Inc.
MODEL:	S040EU1200250
INPUT:	100-240Vac, 50/60Hz, 1.2A Max
OUTPUT:	12Vdc, 2500mA
POWER LINE:	1.5m cable without core attached on adapter

4. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.



3.2 DESCRIPTION OF TEST MODES

FOR 2.4GHz:

11 channels are provided for 802.11b, 802.11g and 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

FOR 5.0GHz (5745 ~ 5825MHz):

5 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz		

2 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
151	5755MHz	159	5795MHz

1 channel is provided for 802.11ac (80MHz):

CHANNEL	FREQUENCY
155	5775MHz



3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

FOR 2.4GHz:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE≥1G**: Radiated Emission above 1GHz **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on X-plane.

RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	7.2
-	802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	15.0

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	6	DSSS	DBPSK	1.0

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	6	DSSS	DBPSK	1.0



BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
-	802.11n (20MHz)	1 to 11	1, 11	OFDM	BPSK	7.2
-	802.11n (40MHz)	3 to 9	3, 9	OFDM	BPSK	15.0

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	7.2
-	802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	15.0

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE≥1G	25deg. C, 65%RH	120Vac, 60Hz	Chris Lin
RE<1G	25deg. C, 65%RH	120Vac, 60Hz	Chris Lin
PLC	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui
APCM	25deg. C, 60%RH	120Vac, 60Hz	Nick Chen



FOR 5.0GHz (5745 ~ 5825MHz):

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE≥1G**: Radiated Emission above 1GHz **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on X-plane.

RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6.0
-	802.11n (20MHz)	149 to 165	149, 157, 165	OFDM	BPSK	7.2
-	802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	15.0
-	802.11ac (80MHz)	155	155	OFDM	BPSK	32.5

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11ac (80MHz)	155	155	OFDM	BPSK	32.5

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11ac (80MHz)	155	155	OFDM	BPSK	32.5



BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11a	149 to 165	149, 165	OFDM	BPSK	6.0
-	802.11n (20MHz)	149 to 165	149, 165	OFDM	BPSK	7.2
-	802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	15.0
-	802.11ac (80MHz)	155	155	OFDM	BPSK	32.5

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6.0
-	802.11n (20MHz)	149 to 165	149, 157, 165	OFDM	BPSK	7.2
-	802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	15.0
-	802.11ac (80MHz)	155	155	OFDM	BPSK	32.5

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE≥1G	25deg. C, 65%RH	120Vac, 60Hz	Chris Lin
RE<1G	25deg. C, 65%RH	120Vac, 60Hz	Chris Lin
PLC	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui
APCM	25deg. C, 60%RH	120Vac, 60Hz	Nick Chen




A D T

3.3 DUTY CYCLE OF TEST SIGNAL

2.4GHz Band:

802.11b, 802.11n (20MHz), 802.11n (40MHz): Duty cycle of test signal is > 98 %, duty factor is not required.

802.11g: Duty cycle = $2.021/2.075 = 0.974$, Duty factor = $10 * \log(1/0.974) = 0.11$, duty factor shall be considered.

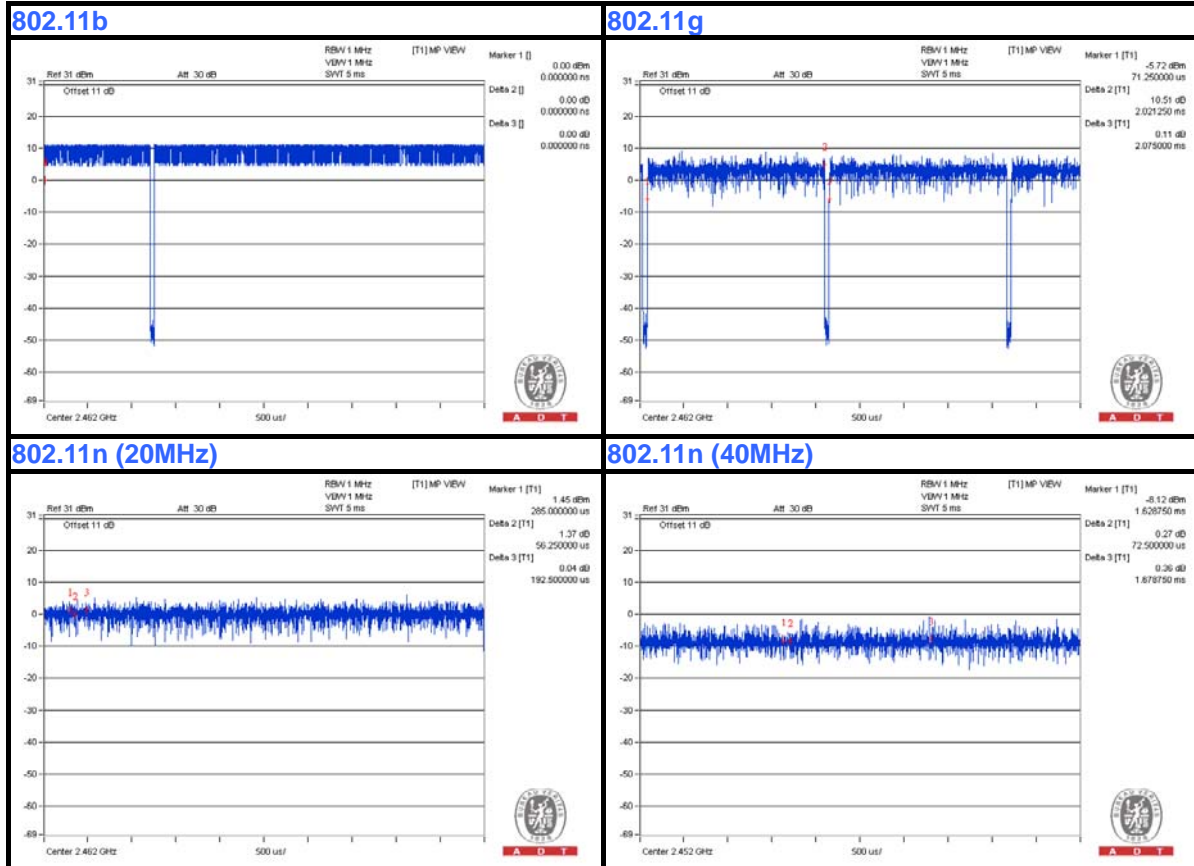



A D T

5GHz Band:


If duty cycle is < 98%, duty factor shall be considered.

802.11a: Duty cycle = 2.026/2.086 = 0.971, Duty factor = $10 * \log(1/0.971) = 0.13$

802.11n (20MHz): Duty cycle = 1.884/1.948 = 0.969, Duty factor = $10 * \log(1/0.969) = 0.14$

802.11n (40MHz): Duty cycle = 0.925/0.987 = 0.937, Duty factor = $10 * \log(1/0.937) = 0.28$

802.11ac (80MHz): Duty cycle = 0.455/0.511 = 0.890, Duty factor = $10 * \log(1/0.890) = 0.50$

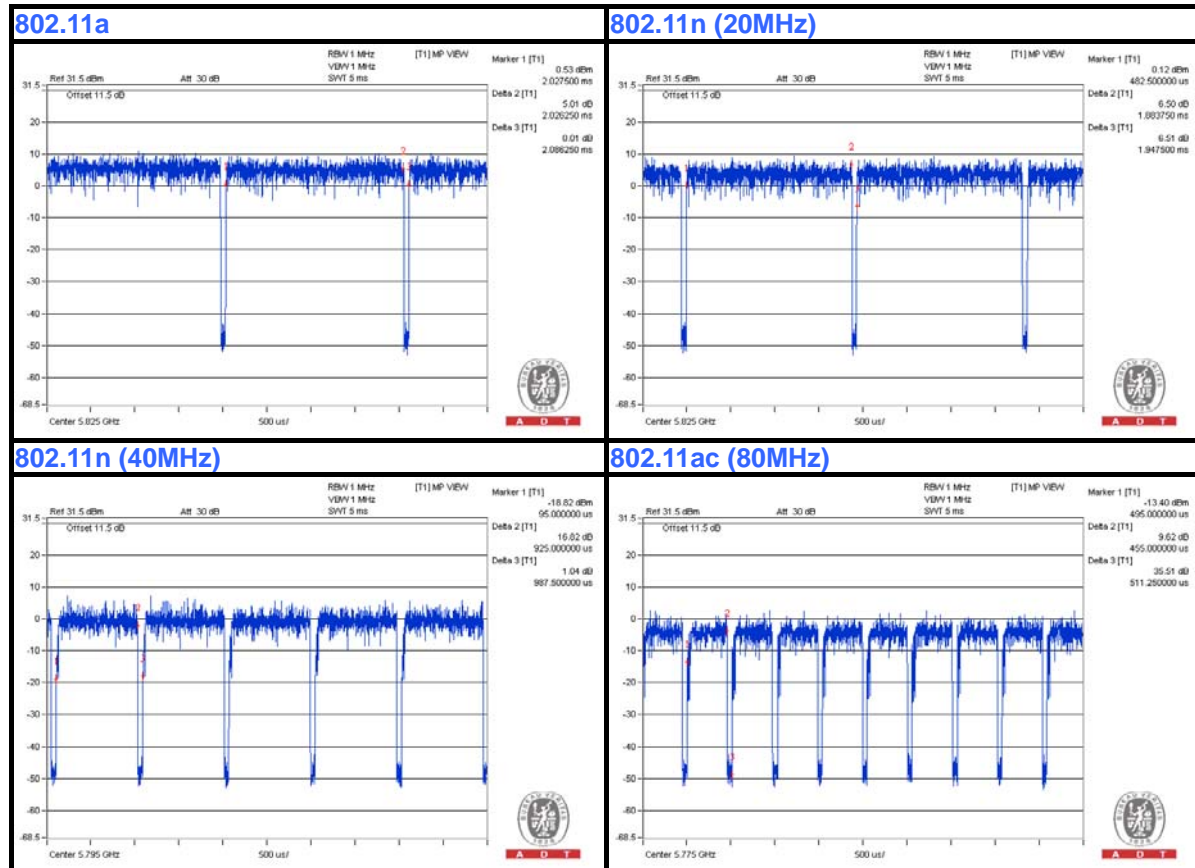

3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	USB Flash Drive	Transcend	V85	538455 4490	FCC DoC Approved
2	USB Flash Drive	Lenovo	F310	OA0427594500756	FCC DoC Approved
3	Notebook	DELL	E5410	6RP2YM1	FCC DoC Approved

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	NA
3	3m LAN cable

NOTE: All power cords of the above support units are non-shielded (1.8m).

3.4.1 CONFIGURATION OF SYSTEM UNDER TEST

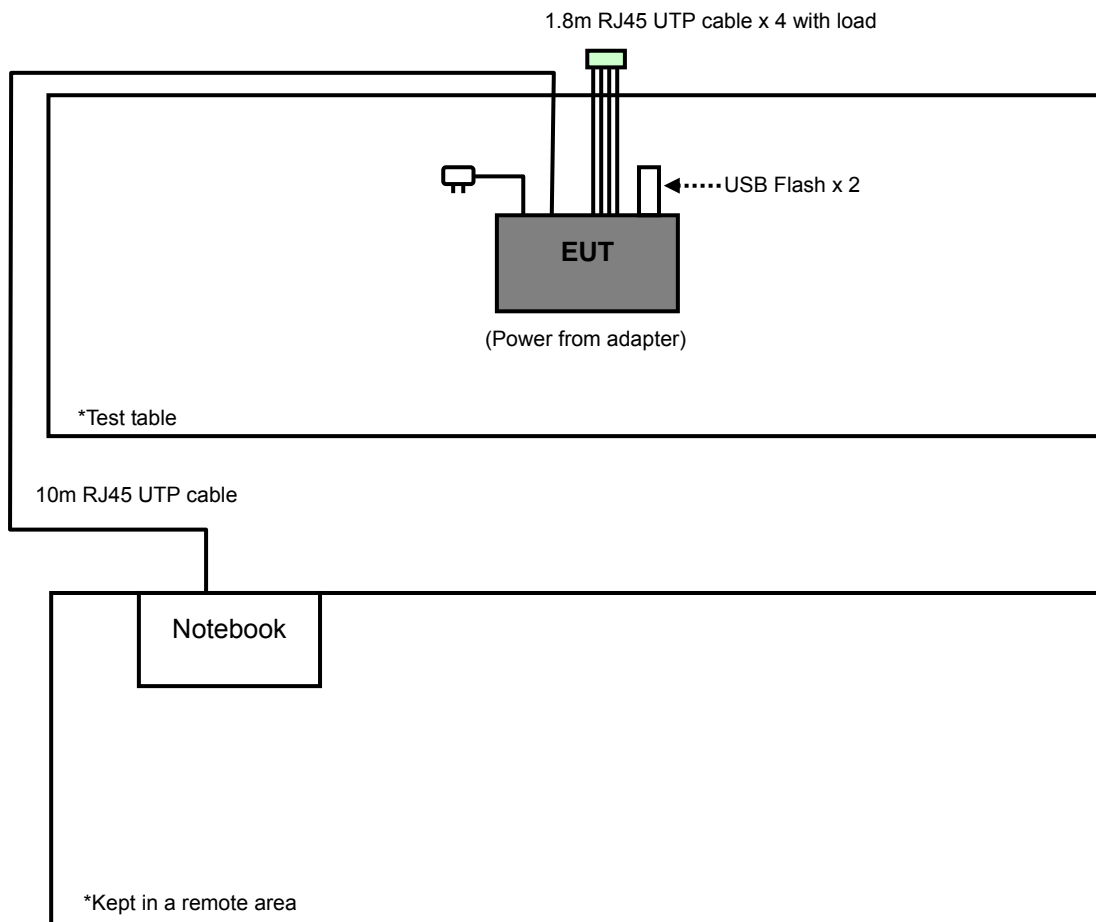



A D T

3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

558074 D01 DTS Meas Guidance v03r01

662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



4. TEST TYPES AND RESULTS (FOR 2.4GHz BAND)

4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 30dB under any condition of modulation.



A D T

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESIB7	100187	Jan. 02, 2013	Jan. 01, 2014
			Jan. 02, 2014	Jan. 01, 2015
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Jan. 31, 2013	Jan. 30, 2014
			Jan. 31, 2014	Jan. 30, 2015
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Mar. 20, 2013	Mar. 19, 2014
HORN Antenna SCHWARZBECK	9120D	209	Sep. 12, 2013	Sep. 11, 2014
HORN Antenna SCHWARZBECK	BBHA 9170	148	Jul. 15, 2013	Jul. 14, 2014
Preamplifier Agilent	8447D	2944A10633	Oct. 07, 2013	Oct. 06, 2014
Preamplifier Agilent	8449B	3008A01964	Aug. 26, 2013	Aug. 25, 2014
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	214378/4	Aug. 26, 2013	Aug. 25, 2014
RF signal cable HUBER+SUHNNER	SUCOFLEX 106	12738/6+309224/ 4	Aug. 26, 2013	Aug. 25, 2014
Software BV ADT	ADT_Radiated_ V7.6.15.9.4	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA	NA
Turn Table BV ADT	TT100	TT93021703	NA	NA
Turn Table Controller BV ADT	SC100	SC93021703	NA	NA
26GHz ~ 40GHz Amplifier	EM26400	815221	Oct. 18, 2013	Oct. 17, 2014
High Speed Peak Power Meter	ML2495A	0824012	Aug. 22, 2013	Aug. 21, 2014
Power Sensor	MA2411B	0738171	Jul. 30, 2013	Jul. 29, 2014

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 3.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 988962.
 5. The IC Site Registration No. is IC 7450F-3.



A D T

4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 1kHz(Duty cycle < 98%) or 10Hz(Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD


No deviation.

4.1.5 TEST SETUP

Frequency range 30MHz~1GHz

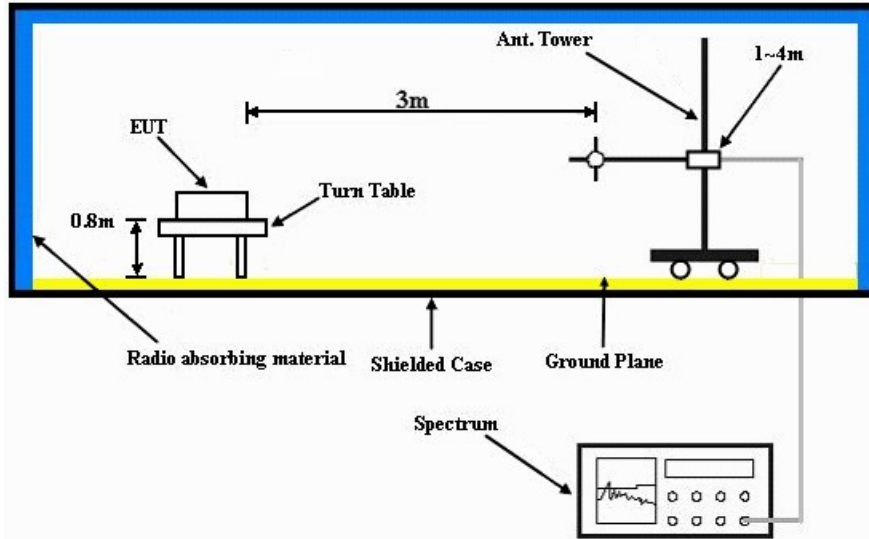

Frequency range above 1GHz

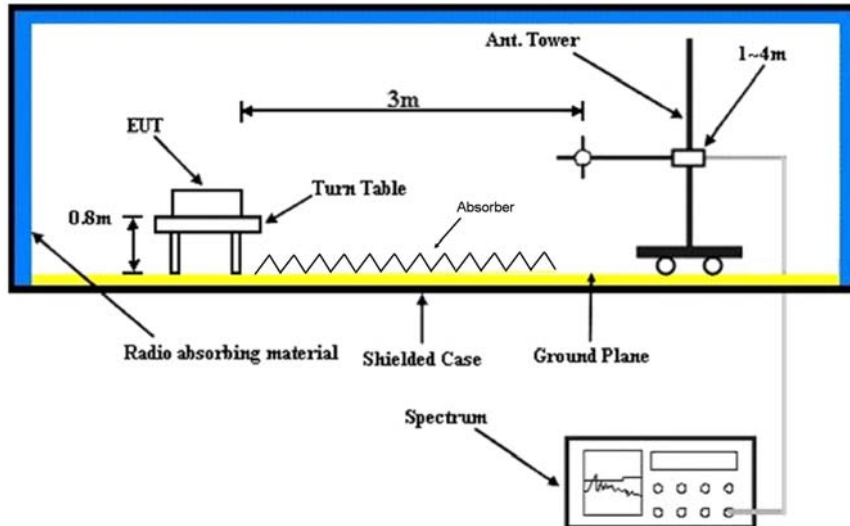

For the actual test configuration, please refer to the attached file (Test Setup Photo).



A D T

4.1.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on the testing table.
- b. Prepared notebook to act as a communication partner and placed it outside of testing area.
- c. The communication partner connected with EUT via a RJ45 cable and ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- d. The communication partner sent data to EUT by command "PING".



A D T

4.1.7 TEST RESULTS

ABOVE 1GHz DATA :

802.11b

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.9 PK	74.0	-11.1	2.09 H	285	31.90	31.00
2	2390.00	52.6 AV	54.0	-1.4	2.09 H	285	21.60	31.00
3	*2412.00	117.4 PK			1.39 H	306	86.30	31.10
4	*2412.00	113.7 AV			1.39 H	306	82.60	31.10
5	4824.00	51.9 PK	74.0	-22.1	1.42 H	231	47.50	4.40
6	4824.00	48.0 AV	54.0	-6.0	1.42 H	231	43.60	4.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.3 PK	74.0	-14.7	1.08 V	242	28.30	31.00
2	2390.00	49.9 AV	54.0	-4.1	1.08 V	242	18.90	31.00
3	*2412.00	111.3 PK			1.06 V	262	80.20	31.10
4	*2412.00	107.7 AV			1.06 V	262	76.60	31.10
5	4824.00	55.3 PK	74.0	-18.7	1.13 V	321	50.90	4.40
6	4824.00	52.2 AV	54.0	-1.8	1.13 V	321	47.80	4.40

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	122.6 PK			1.38 H	318	91.40	31.20
2	*2437.00	119.0 AV			1.38 H	318	87.80	31.20
3	4874.00	53.4 PK	74.0	-20.6	1.40 H	229	48.90	4.50
4	4874.00	49.6 AV	54.0	-4.4	1.40 H	229	45.10	4.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	112.0 PK			1.00 V	100	80.80	31.20
2	*2437.00	108.8 AV			1.00 V	100	77.60	31.20
3	4874.00	56.2 PK	74.0	-17.8	1.00 V	335	51.70	4.50
4	4874.00	53.0 AV	54.0	-1.0	1.00 V	335	48.50	4.50

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	116.0 PK			1.34 H	270	84.70	31.30
2	*2462.00	112.3 AV			1.34 H	270	81.00	31.30
3	2483.50	60.5 PK	74.0	-13.5	1.34 H	313	29.10	31.40
4	2483.50	48.4 AV	54.0	-5.6	1.34 H	313	17.00	31.40
5	4924.00	52.8 PK	74.0	-21.2	1.01 H	6	48.00	4.80
6	4924.00	48.2 AV	54.0	-5.8	1.01 H	6	43.40	4.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	109.3 PK			1.05 V	261	78.00	31.30
2	*2462.00	105.4 AV			1.05 V	261	74.10	31.30
3	2483.50	57.0 PK	74.0	-17.0	1.09 V	255	25.60	31.40
4	2483.50	45.4 AV	54.0	-8.6	1.09 V	255	14.00	31.40
5	4924.00	57.3 PK	74.0	-16.7	1.25 V	338	52.50	4.80
6	4924.00	53.7 AV	54.0	-0.3	1.25 V	338	48.90	4.80

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.



A D T

802.11g

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	72.7 PK	74.0	-1.3	1.38 H	288	41.70	31.00
2	2390.00	53.6 AV	54.0	-0.4	1.38 H	288	22.60	31.00
3	*2412.00	113.3 PK			1.38 H	288	82.20	31.10
4	*2412.00	104.4 AV			1.38 H	288	73.30	31.10
5	4824.00	47.4 PK	74.0	-26.6	1.10 H	202	43.00	4.40
6	4824.00	34.5 AV	54.0	-19.5	1.10 H	192	30.10	4.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.7 PK	74.0	-13.3	1.76 V	244	29.70	31.00
2	2390.00	48.8 AV	54.0	-5.2	1.76 V	244	17.80	31.00
3	*2412.00	106.5 PK			1.05 V	266	75.40	31.10
4	*2412.00	95.9 AV			1.05 V	266	64.80	31.10
5	4824.00	46.3 PK	74.0	-27.7	1.28 V	202	41.90	4.40
6	4824.00	34.6 AV	54.0	-19.4	1.28 V	202	30.20	4.40

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2360.00	65.8 PK	74.0	-8.2	1.44 H	280	34.90	30.90
2	2360.00	53.6 AV	54.0	-0.4	1.35 H	288	22.70	30.90
3	2390.00	61.7 PK	74.0	-12.3	1.44 H	280	30.70	31.00
4	2390.00	51.3 AV	54.0	-2.7	1.35 H	288	20.30	31.00
5	*2437.00	118.2 PK			1.37 H	309	87.00	31.20
6	*2437.00	108.7 AV			1.37 H	309	77.50	31.20
7	4874.00	50.5 PK	74.0	-23.5	1.65 H	311	46.00	4.50
8	4874.00	38.1 AV	54.0	-15.9	1.65 H	311	33.60	4.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.2 PK	74.0	-16.8	1.00 V	99	26.20	31.00
2	2390.00	45.5 AV	54.0	-8.5	1.00 V	99	14.50	31.00
3	*2437.00	109.6 PK			1.00 V	241	78.40	31.20
4	*2437.00	100.0 AV			1.00 V	241	68.80	31.20
5	4874.00	51.5 PK	74.0	-22.5	1.00 V	355	47.00	4.50
6	4874.00	37.5 AV	54.0	-16.5	1.00 V	355	33.00	4.50

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	115.0 PK			1.35 H	303	83.70	31.30
2	*2462.00	105.3 AV			1.35 H	303	74.00	31.30
3	2483.50	73.2 PK	74.0	-0.8	1.36 H	319	41.80	31.40
4	2483.50	53.7 AV	54.0	-0.3	1.36 H	319	22.30	31.40
5	4924.00	49.6 PK	74.0	-24.4	1.00 H	22	44.80	4.80
6	4924.00	35.8 AV	54.0	-18.2	1.00 H	22	31.00	4.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	107.6 PK			1.00 V	289	76.30	31.30
2	*2462.00	97.5 AV			1.00 V	289	66.20	31.30
3	2483.50	70.6 PK	74.0	-3.4	1.98 V	19	39.20	31.40
4	2483.50	52.4 AV	54.0	-1.6	1.98 V	19	21.00	31.40
5	4924.00	50.4 PK	74.0	-23.6	1.20 V	294	45.60	4.80
6	4924.00	38.4 AV	54.0	-15.6	1.20 V	294	33.60	4.80

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.



A D T

802.11n (20MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.7 PK	74.0	-2.3	1.37 H	289	40.70	31.00
2	2390.00	53.6 AV	54.0	-0.4	1.37 H	289	22.60	31.00
3	*2412.00	112.3 PK			1.33 H	289	81.20	31.10
4	*2412.00	102.0 AV			1.33 H	289	70.90	31.10
5	4824.00	49.7 PK	74.0	-24.3	1.02 H	157	45.30	4.40
6	4824.00	34.9 AV	54.0	-19.1	1.02 H	157	30.50	4.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.2 PK	74.0	-11.8	1.12 V	262	31.20	31.00
2	2390.00	48.3 AV	54.0	-5.7	1.12 V	262	17.30	31.00
3	*2412.00	104.6 PK			1.03 V	256	73.50	31.10
4	*2412.00	94.9 AV			1.03 V	256	63.80	31.10
5	4824.00	51.2 PK	74.0	-22.8	1.22 V	155	46.80	4.40
6	4824.00	38.9 AV	54.0	-15.1	1.22 V	155	34.50	4.40

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.1 PK	74.0	-4.9	1.36 H	290	38.10	31.00
2	2390.00	53.8 AV	54.0	-0.2	1.36 H	290	22.80	31.00
3	*2437.00	119.0 PK			1.32 H	285	87.80	31.20
4	*2437.00	108.8 AV			1.32 H	285	77.60	31.20
5	2483.50	66.4 PK	74.0	-7.6	1.33 H	266	35.00	31.40
6	2483.50	49.9 AV	54.0	-4.1	1.33 H	266	18.50	31.40
7	4874.00	53.2 PK	74.0	-20.8	1.02 H	210	48.70	4.50
8	4874.00	38.0 AV	54.0	-16.0	1.02 H	210	33.50	4.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.8 PK	74.0	-14.2	1.00 V	124	28.80	31.00
2	2390.00	48.9 AV	54.0	-5.1	1.00 V	124	17.90	31.00
3	*2437.00	107.5 PK			1.03 V	235	76.30	31.20
4	*2437.00	97.4 AV			1.03 V	235	66.20	31.20
5	2483.50	56.7 PK	74.0	-17.3	1.00 V	162	25.30	31.40
6	2483.50	44.9 AV	54.0	-9.1	1.00 V	162	13.50	31.40
7	4874.00	55.0 PK	74.0	-19.0	1.05 V	115	50.50	4.50
8	4874.00	41.4 AV	54.0	-12.6	1.05 V	115	36.90	4.50

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	113.2 PK			1.33 H	305	81.90	31.30
2	*2462.00	103.4 AV			1.33 H	305	72.10	31.30
3	2483.50	68.2 PK	74.0	-5.8	1.29 H	291	36.80	31.40
4	2483.50	53.7 AV	54.0	-0.3	1.29 H	291	22.30	31.40
5	4924.00	50.2 PK	74.0	-23.8	1.32 H	205	45.40	4.80
6	4924.00	38.3 AV	54.0	-15.7	1.32 H	205	33.50	4.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	103.9 PK			1.02 V	258	72.60	31.30
2	*2462.00	93.8 AV			1.02 V	258	62.50	31.30
3	2483.50	65.9 PK	74.0	-8.1	1.00 V	240	34.50	31.40
4	2483.50	49.6 AV	54.0	-4.4	1.00 V	240	18.20	31.40
5	4924.00	55.1 PK	74.0	-18.9	1.00 V	54	50.30	4.80
6	4924.00	41.4 AV	54.0	-12.6	1.00 V	54	36.60	4.80

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.



A D T

802.11n (40MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 3	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.9 PK	74.0	-6.1	1.55 H	286	36.90	31.00
2	2390.00	53.8 AV	54.0	-0.2	1.55 H	286	22.80	31.00
3	*2422.00	108.4 PK			1.33 H	287	77.20	31.20
4	*2422.00	98.1 AV			1.33 H	287	66.90	31.20
5	4844.00	49.9 PK	74.0	-24.1	1.05 H	163	45.40	4.50
6	4844.00	38.0 AV	54.0	-16.0	1.05 H	163	33.50	4.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.5 PK	74.0	-12.5	1.42 V	209	30.50	31.00
2	2390.00	46.6 AV	54.0	-7.4	1.42 V	209	15.60	31.00
3	*2422.00	100.1 PK			1.00 V	239	68.90	31.20
4	*2422.00	89.8 AV			1.00 V	239	58.60	31.20
5	4844.00	54.2 PK	74.0	-19.8	1.02 V	174	49.70	4.50
6	4844.00	41.0 AV	54.0	-13.0	1.02 V	174	36.50	4.50

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.9 PK	74.0	-6.1	1.32 H	288	36.90	31.00
2	2390.00	53.6 AV	54.0	-0.4	1.32 H	288	22.60	31.00
3	*2437.00	110.6 PK			1.33 H	266	79.40	31.20
4	*2437.00	100.9 AV			1.33 H	266	69.70	31.20
5	2483.50	68.1 PK	74.0	-5.9	1.29 H	267	36.70	31.40
6	2483.50	51.9 AV	54.0	-2.1	1.29 H	267	20.50	31.40
7	4874.00	48.2 PK	74.0	-25.8	1.21 H	188	43.70	4.50
8	4874.00	40.1 AV	54.0	-13.9	1.21 H	188	35.60	4.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.6 PK	74.0	-15.4	1.52 V	182	27.60	31.00
2	2390.00	45.6 AV	54.0	-8.4	1.52 V	182	14.60	31.00
3	*2437.00	102.2 PK			1.00 V	239	71.00	31.20
4	*2437.00	92.7 AV			1.00 V	239	61.50	31.20
5	2483.50	55.0 PK	74.0	-19.0	1.00 V	264	23.60	31.40
6	2483.50	44.0 AV	54.0	-10.0	1.00 V	264	12.60	31.40
7	4874.00	54.2 PK	74.0	-19.8	1.75 V	268	49.70	4.50
8	4874.00	41.0 AV	54.0	-13.0	1.75 V	268	36.50	4.50

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 9	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	108.4 PK			1.34 H	294	77.10	31.30
2	*2452.00	98.7 AV			1.34 H	294	67.40	31.30
3	2483.50	69.0 PK	74.0	-5.0	1.32 H	309	37.60	31.40
4	2483.50	53.7 AV	54.0	-0.3	1.32 H	309	22.30	31.40
5	4904.00	48.4 PK	74.0	-25.6	1.55 H	296	43.70	4.70
6	4904.00	38.2 AV	54.0	-15.8	1.55 H	296	33.50	4.70
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	100.7 PK			1.06 V	259	69.40	31.30
2	*2452.00	90.2 AV			1.06 V	259	58.90	31.30
3	2483.50	63.1 PK	74.0	-10.9	1.01 V	80	31.70	31.40
4	2483.50	49.5 AV	54.0	-4.5	1.01 V	80	18.10	31.40
5	4904.00	53.1 PK	74.0	-20.9	1.05 V	193	48.40	4.70
6	4904.00	40.4 AV	54.0	-13.6	1.05 V	193	35.70	4.70

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.



A D T

BELOW 1GHz WORST-CASE DATA : 802.11b

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.07	30.9 QP	40.0	-9.1	2.00 H	0	45.80	-14.90
2	249.17	32.0 QP	46.0	-14.0	1.21 H	337	46.30	-14.30
3	375.29	38.2 QP	46.0	-7.8	1.00 H	231	49.10	-10.90
4	600.38	38.2 QP	46.0	-7.8	1.41 H	0	44.30	-6.10
5	875.91	36.4 QP	46.0	-9.6	1.61 H	242	37.40	-1.00
6	961.29	50.3 QP	54.0	-3.7	1.41 H	81	49.60	0.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	156.03	25.6 QP	43.5	-17.9	1.00 V	314	39.50	-13.90
2	375.29	37.2 QP	46.0	-8.8	1.19 V	195	48.10	-10.90
3	499.48	32.9 QP	46.0	-13.1	1.00 V	9	41.20	-8.30
4	625.60	34.0 QP	46.0	-12.0	1.00 V	236	39.50	-5.50
5	875.91	34.2 QP	46.0	-11.8	1.60 V	165	35.20	-1.00
6	961.29	48.8 QP	54.0	-5.2	1.60 V	340	48.10	0.70

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
 - Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:** 1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100289	Nov. 29, 2013	Nov. 28, 2014
RF signal cable Woken	5D-FB	Cable-HYC01-01	Dec. 27, 2013	Dec. 26, 2014
LISN ROHDE & SCHWARZ (EUT)	ESH3-Z5	835239/001	Feb. 13, 2014	Feb. 12, 2015
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Jul. 17, 2013	Jul. 16, 2014
Software ADT	BV ADT_Cond_ V7.3.7.3	NA	NA	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 1.
 3. The VCCI Site Registration No. is C-2040.

4.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

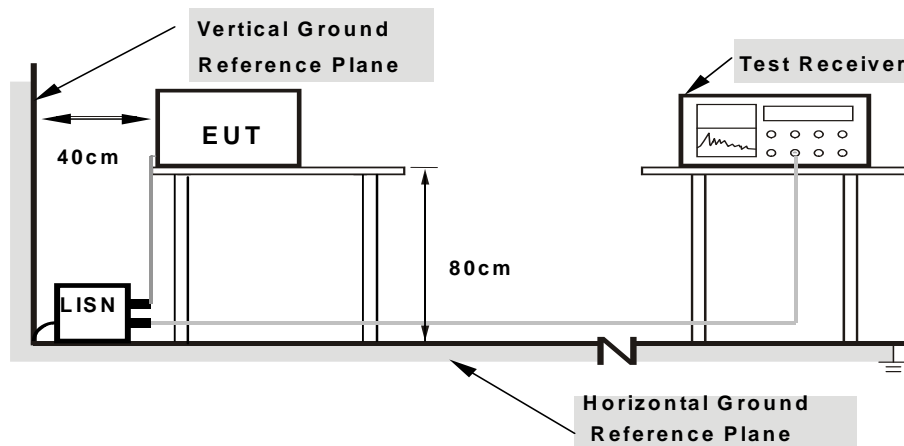

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.

4.2.7 TEST RESULTS


CONDUCTED WORST-CASE DATA : 802.11b

PHASE	Line 1	6dB BANDWIDTH	9kHz
--------------	--------	----------------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15782	0.11	46.41	30.37	46.52	30.48	65.58
2	0.18519	0.10	41.41	25.83	41.51	25.93	64.25	54.25	-22.74	-28.32
3	0.21256	0.09	37.77	22.88	37.86	22.97	63.10	53.10	-25.24	-30.13
4	0.47789	0.12	29.39	25.13	29.51	25.25	56.38	46.38	-26.86	-21.12
5	1.35819	0.22	17.56	12.87	17.78	13.09	56.00	46.00	-38.22	-32.91
6	3.80105	0.26	19.58	15.07	19.84	15.33	56.00	46.00	-36.16	-30.67

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

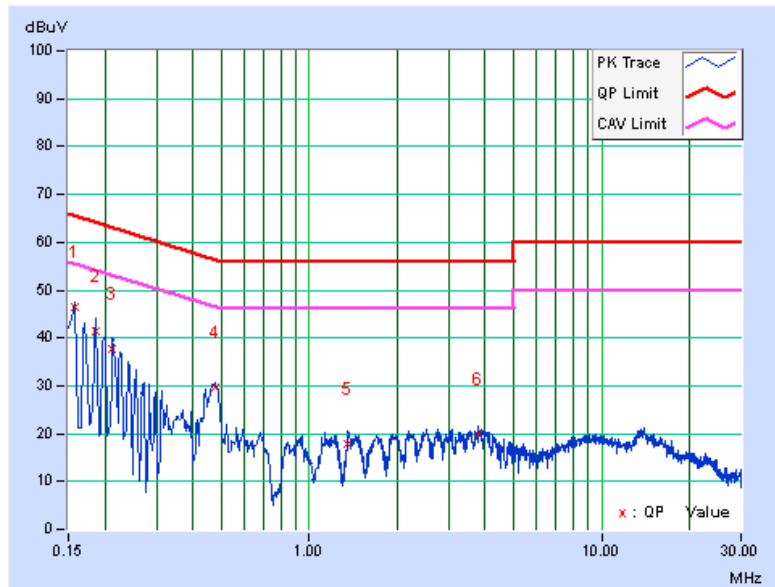




A D T

PHASE	Line 2	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16173	0.06	45.41	30.57	45.47	30.63	65.37	55.37	-19.91	-24.75
2	0.18910	0.08	40.91	25.37	40.99	25.45	64.08	54.08	-23.08	-28.62
3	0.21647	0.10	36.90	22.04	37.00	22.14	62.95	52.95	-25.96	-30.82
4	0.45889	0.17	27.50	23.13	27.67	23.30	56.71	46.71	-29.04	-23.41
5	0.93982	0.21	21.13	16.92	21.34	17.13	56.00	46.00	-34.66	-28.87
6	4.28678	0.27	16.41	10.86	16.68	11.13	56.00	46.00	-39.32	-34.87

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

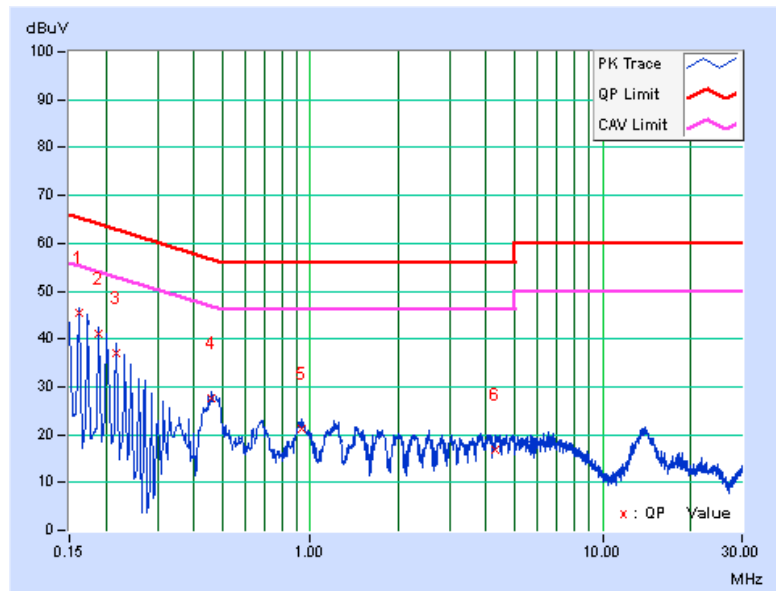


4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST SETUP

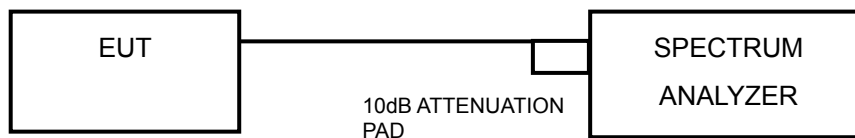

4.3.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.3.4 TEST PROCEDURE

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 DEVIATION FROM TEST STANDARD

No deviation.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.3.7 TEST RESULTS

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)			MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
1	2412	6.55	5.61	6.10	0.5	PASS
6	2437	6.10	6.54	6.06	0.5	PASS
11	2462	6.09	6.08	6.06	0.5	PASS

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)			MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
1	2412	16.39	16.41	16.41	0.5	PASS
6	2437	16.40	16.37	16.40	0.5	PASS
11	2462	16.41	16.40	16.39	0.5	PASS

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)			MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
1	2412	17.65	17.67	17.73	0.5	PASS
6	2437	17.66	17.65	17.78	0.5	PASS
11	2462	17.67	17.85	17.68	0.5	PASS

802.11n (40MHz)


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)			MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
3	2422	36.59	36.44	36.50	0.5	PASS
6	2437	36.23	36.42	36.46	0.5	PASS
9	2452	36.51	36.44	36.50	0.5	PASS




A D T

SPECTRUM PLOT OF WORST VALUE


802.11b

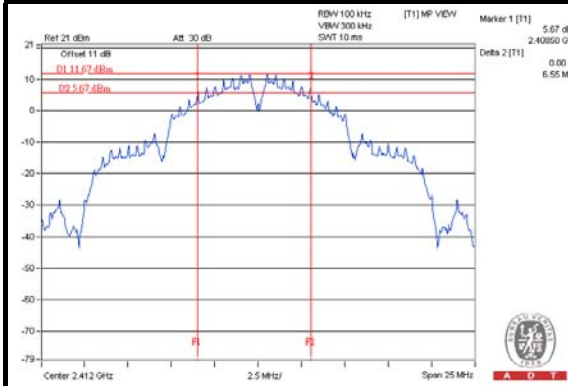


802.11g

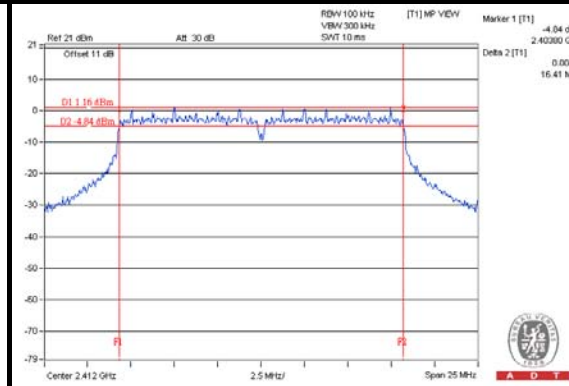

802.11n (20MHz)

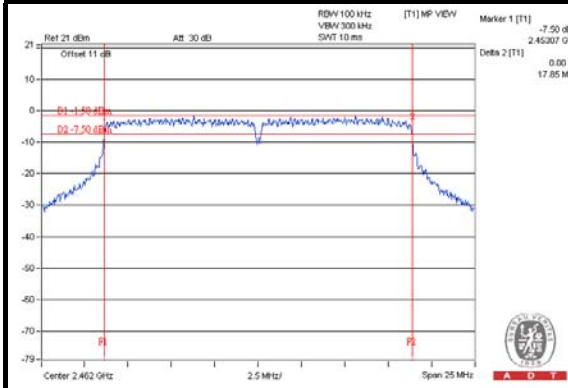

802.11n (40MHz)

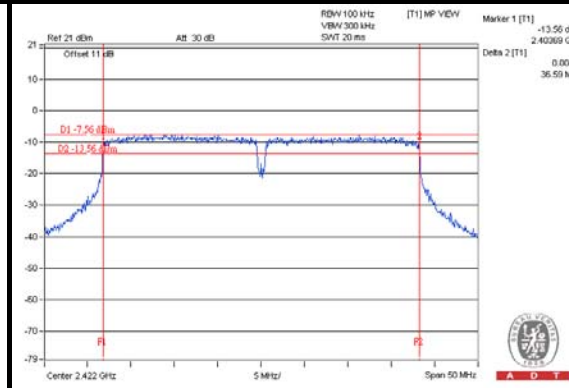

4.4 CONDUCTED OUTPUT POWER

4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output v02r01 Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $NANT \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any NANT;

Array Gain = $5 \log(NANT/NSS)$ dB or 3 dB, whichever is less for 20-MHz channel widths with $NANT \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(NANT/NSS)$ dB.

4.4.2 TEST SETUP

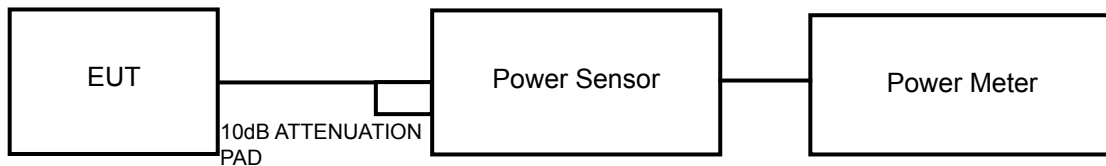

4.4.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.4.4 TEST PROCEDURES

Follow KDB 558074 D01 DTS Meas Guidance v03r01 section 9.1.3

An average power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor. Record the power level.



A D T

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.



4.4.7 TEST RESULTS

802.11b

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
1	2412	19.94	20.17	20.08	304.479	24.84	30	PASS
6	2437	21.02	20.91	21.36	386.557	25.87	30	PASS
11	2462	16.02	16.13	16.04	121.193	20.83	30	PASS

802.11g

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
1	2412	12.95	13.55	13.55	65.016	18.13	30	PASS
6	2437	17.42	17.49	17.89	172.831	22.38	30	PASS
11	2462	14.89	14.62	14.76	89.728	19.53	30	PASS

802.11n (20MHz)

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
1	2412	12.78	12.88	13.03	58.467	17.67	30	PASS
6	2437	18.88	19.36	19.24	247.512	23.94	30	PASS
11	2462	12.55	12.65	13.01	56.396	17.51	30	PASS

802.11n (40MHz)


CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
3	2422	9.60	9.74	9.61	27.680	14.42	30	PASS
6	2437	12.58	13.18	13.25	60.045	17.78	30	PASS
9	2452	9.46	10.20	10.45	30.394	14.83	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST SETUP

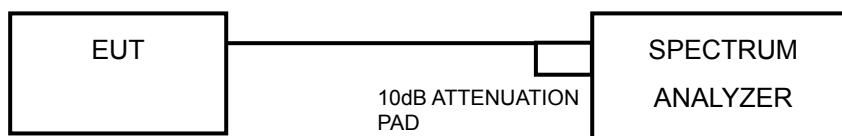

4.5.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.5.4 TEST PROCEDURE

Follow 558074 D01 DTS Meas Guidance v03r01 section 10.2

- Set the RBW = 3 kHz, VBW =10 kHz, Detector = peak.
- Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6



4.5.7 TEST RESULTS

802.11b

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=3) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	-9.68	4.77	-4.91	5.90	PASS
	6	2437	-8.59	4.77	-3.82	5.90	PASS
	11	2462	-14.21	4.77	-9.44	5.90	PASS
1	1	2412	-9.55	4.77	-4.78	5.90	PASS
	6	2437	-8.85	4.77	-4.08	5.90	PASS
	11	2462	-13.70	4.77	-8.93	5.90	PASS
2	1	2412	-8.72	4.77	-3.95	5.90	PASS
	6	2437	-7.72	4.77	-2.95	5.90	PASS
	11	2462	-12.92	4.77	-8.15	5.90	PASS

NOTE: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 8.10 > 6\text{dBi}$, so the power density limit shall be reduced to $8-(8.10-6) = 5.90\text{dBm}$.

802.11g

TX chain	Chan.	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=3) dB	Total PSD W/O DUTY FACTOR (dBm/3kHz)	DUTY FACTOR	Total PSD WITH DUTY FACTOR (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	-15.60	4.77	-10.94	0.11	-10.83	5.90	PASS
	6	2437	-16.11	4.77	-11.45	0.11	-11.34	5.90	PASS
	11	2462	-18.51	4.77	-13.85	0.11	-13.74	5.90	PASS
1	1	2412	-19.62	4.77	-14.96	0.11	-14.85	5.90	PASS
	6	2437	-15.64	4.77	-10.98	0.11	-10.87	5.90	PASS
	11	2462	-18.49	4.77	-13.83	0.11	-13.72	5.90	PASS
2	1	2412	-19.96	4.77	-15.30	0.11	-15.19	5.90	PASS
	6	2437	-14.80	4.77	-10.14	0.11	-10.03	5.90	PASS
	11	2462	-18.40	4.77	-13.74	0.11	-13.63	5.90	PASS

NOTE: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 8.10 > 6\text{dBi}$, so the power density limit shall be reduced to $8-(8.10-6) = 5.90\text{dBm}$.



A D T

802.11n (20MHz)

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=3) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	-15.26	4.77	-10.49	5.90	PASS
	6	2437	-14.28	4.77	-9.51	5.90	PASS
	11	2462	-21.70	4.77	-16.93	5.90	PASS
1	1	2412	-20.05	4.77	-15.28	5.90	PASS
	6	2437	-14.74	4.77	-9.97	5.90	PASS
	11	2462	-20.56	4.77	-15.79	5.90	PASS
2	1	2412	-18.06	4.77	-13.29	5.90	PASS
	6	2437	-13.90	4.77	-9.13	5.90	PASS
	11	2462	-20.48	4.77	-15.71	5.90	PASS

NOTE: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 8.10 > 6\text{dBi}$, so the power density limit shall be reduced to $8 - (8.10 - 6) = 5.90\text{dBm}$.

802.11n (40MHz)

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=3) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	3	2422	-26.04	4.77	-21.27	5.90	PASS
	6	2437	-22.04	4.77	-17.27	5.90	PASS
	9	2452	-26.62	4.77	-21.85	5.90	PASS
1	3	2422	-26.27	4.77	-21.50	5.90	PASS
	6	2437	-23.35	4.77	-18.58	5.90	PASS
	9	2452	-26.05	4.77	-21.28	5.90	PASS
2	3	2422	-26.62	4.77	-21.85	5.90	PASS
	6	2437	-23.98	4.77	-19.21	5.90	PASS
	9	2452	-25.40	4.77	-20.63	5.90	PASS


NOTE: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 8.10 > 6\text{dBi}$, so the power density limit shall be reduced to $8 - (8.10 - 6) = 5.90\text{dBm}$.




A D T

SPECTRUM PLOT OF WORST VALUE


802.11b

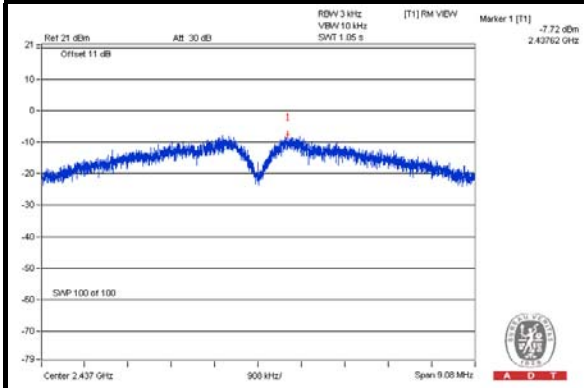


802.11g

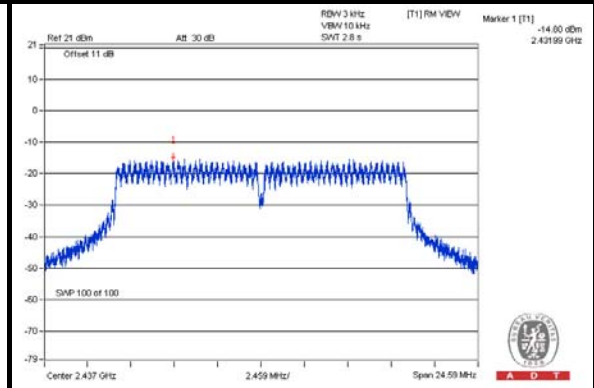

802.11n (20MHz)

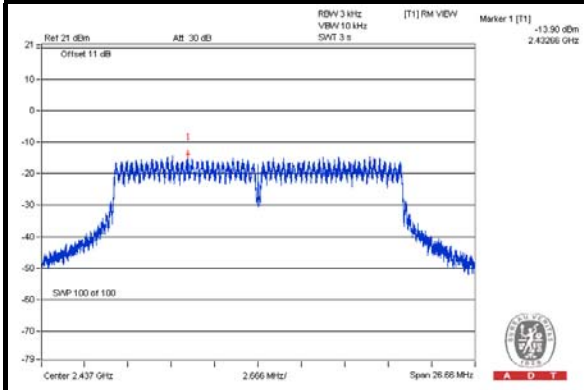

802.11n (40MHz)

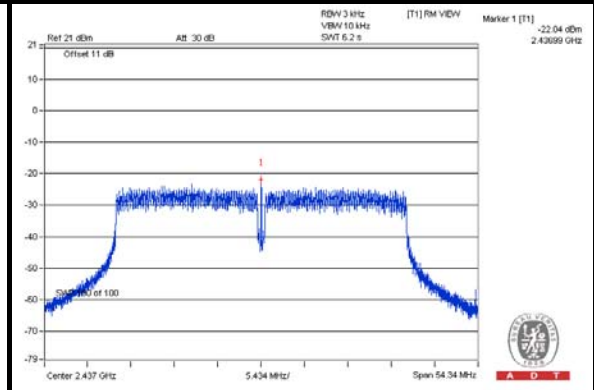


4.6 CONDUCTED OUT OF BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT

Below -30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST SETUP

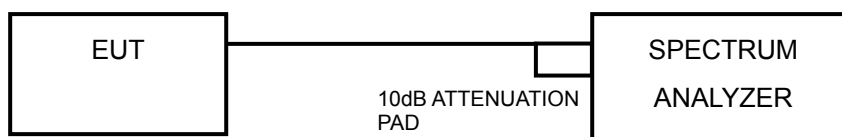

4.6.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.6.4 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



A D T

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Ensure that the number of measurement points \geq span/RBW
4. According to measurement points to set differ measurement span.
5. Detector = peak.
6. Trace Mode = max hold.
7. Sweep = auto couple.

4.6.5 DEVIATION FROM TEST STANDARD

No deviation.

4.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.7 TEST RESULTS

The conducted emission test is performed on each TX port of operating mode without summing or adding $10\log(N)$ since the limit is relative emission limit.



The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.





A D T

802.11b CHAIN 0



CH 1

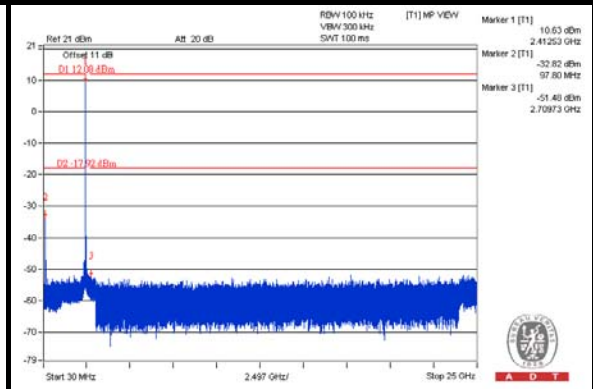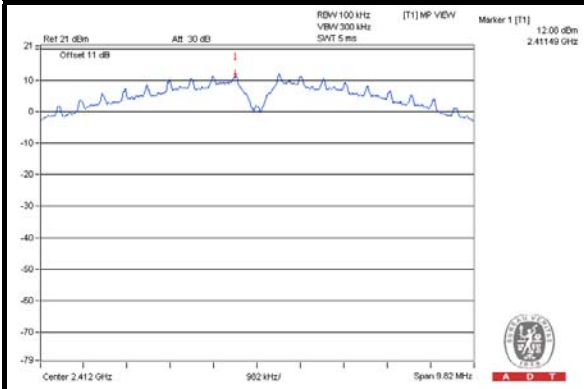


CH 6

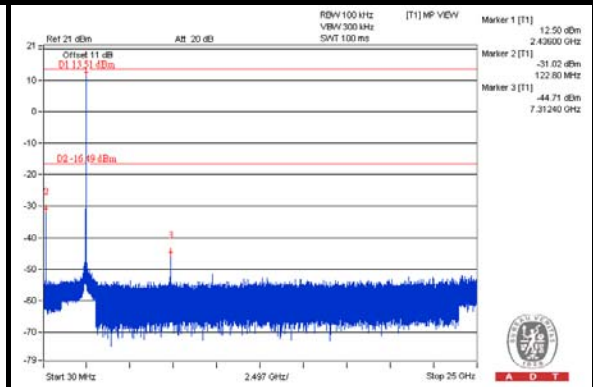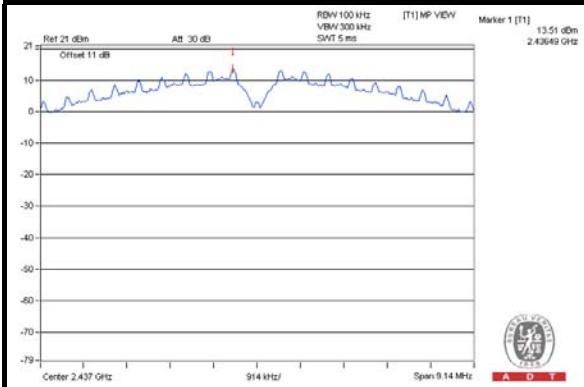


CH 11

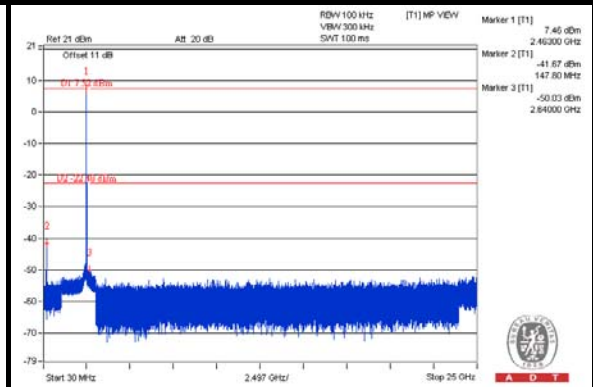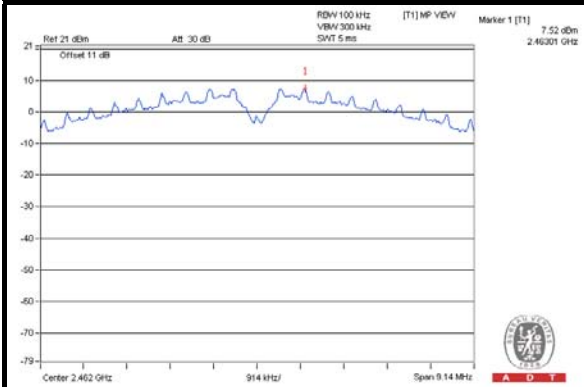

CH 1 Band edge

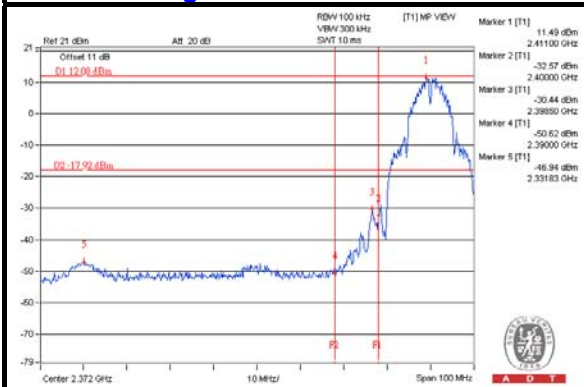

CH 11 Band edge


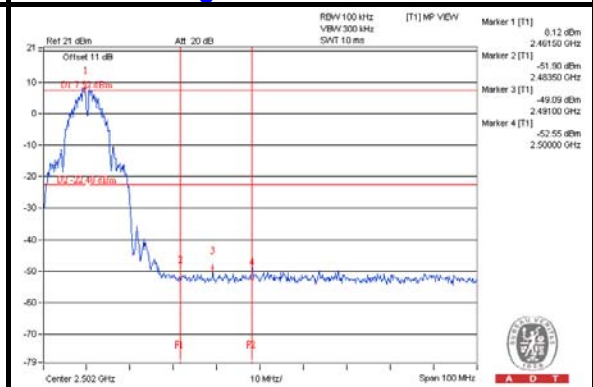






A D T

CHAIN 1



CH 1

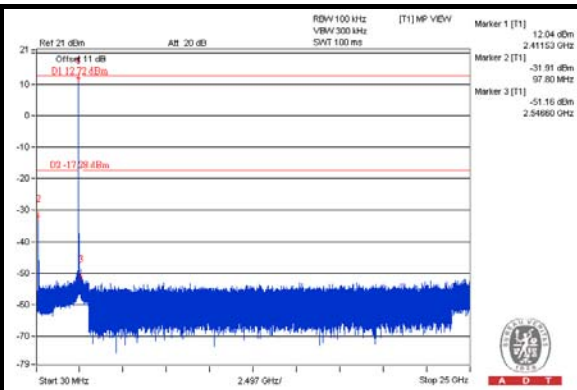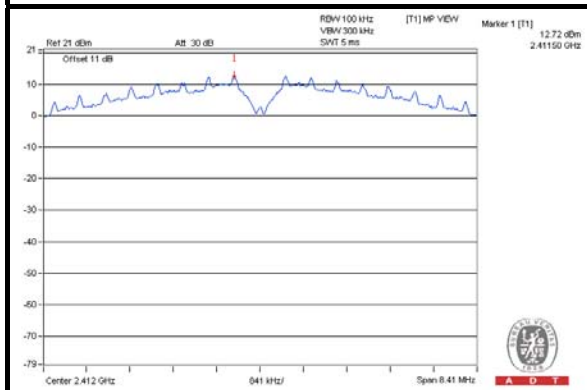


CH 6

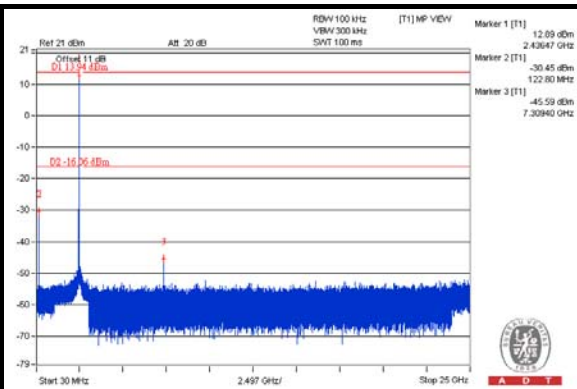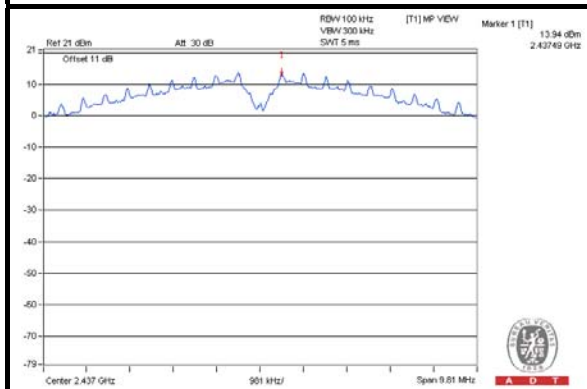


CH 11

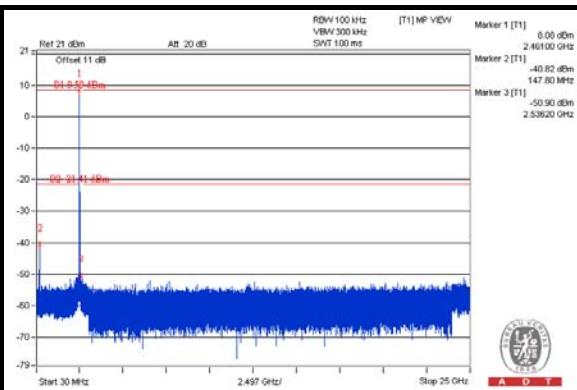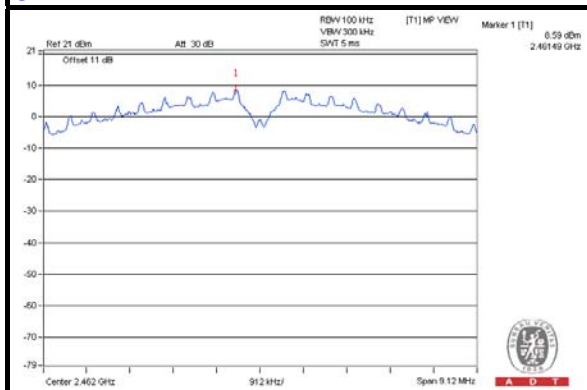

CH 1 Band edge

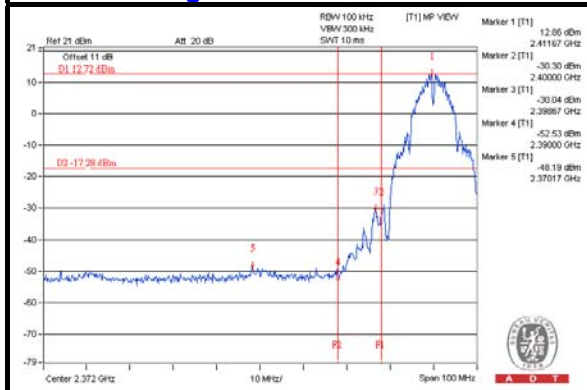

CH 11 Band edge

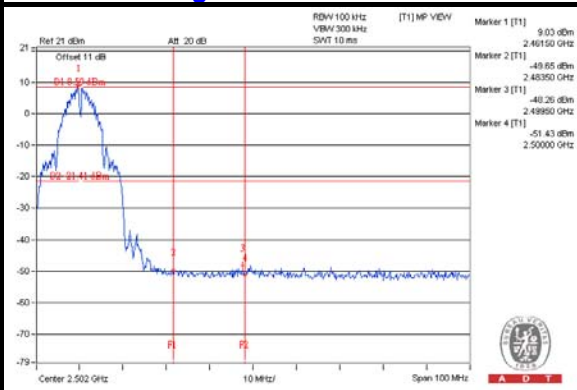





A D T

CHAIN 2


CH 1

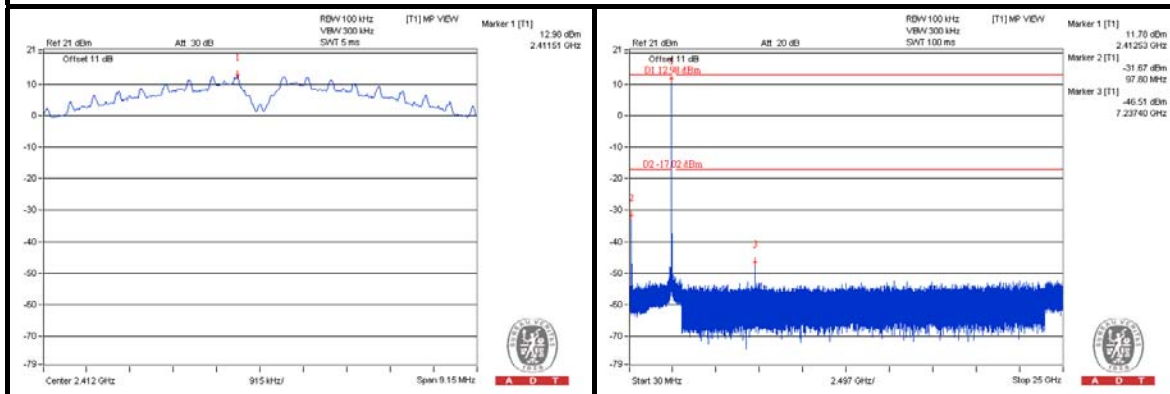


CH 6

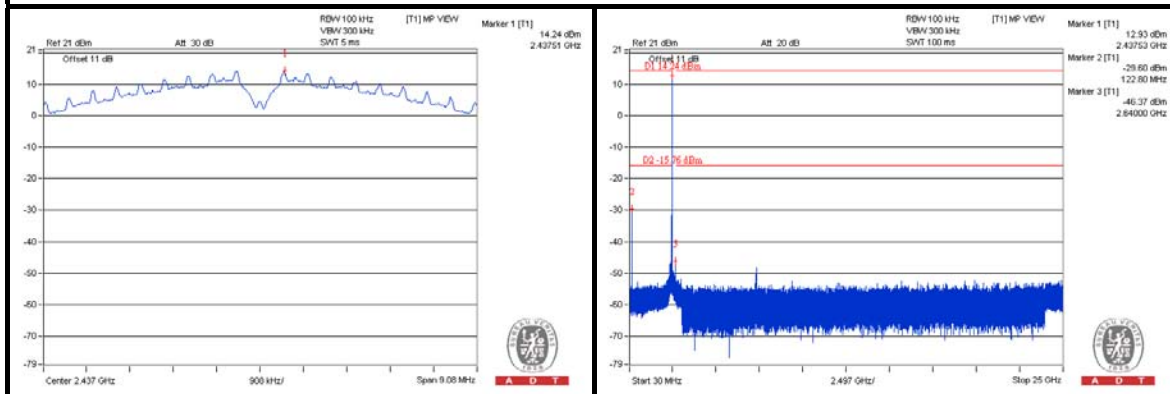


CH 11

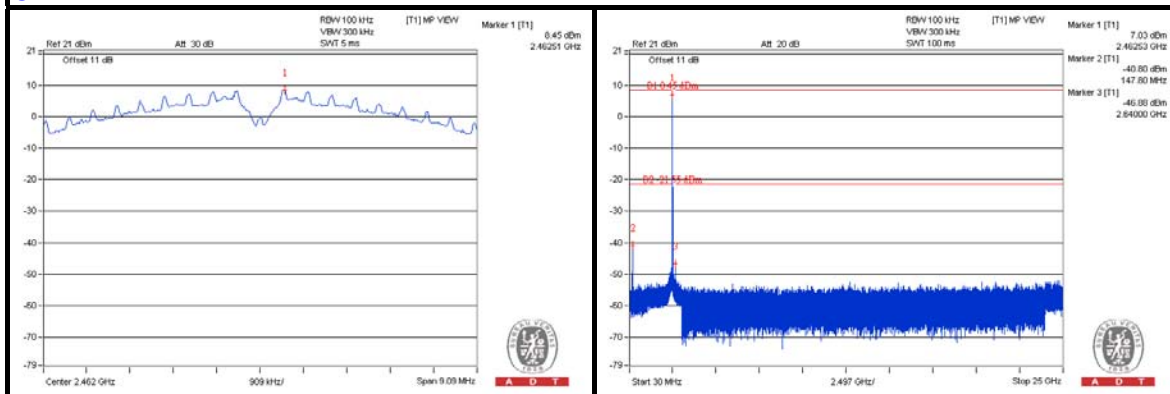

CH 1 Band edge

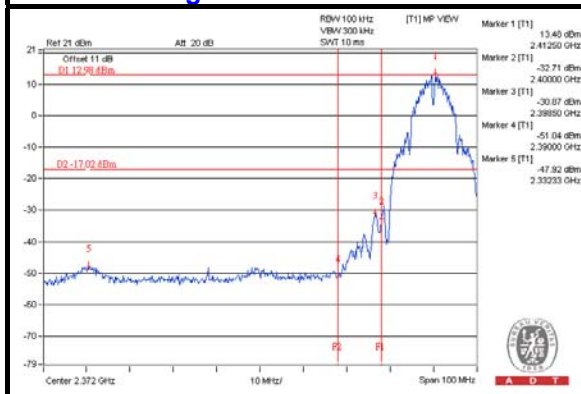

CH 11 Band edge


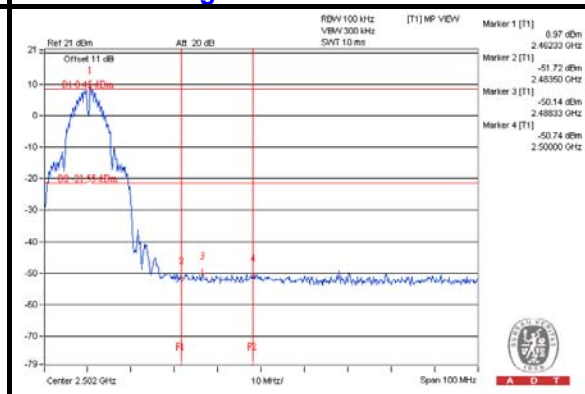






A D T

802.11g CHAIN 0



CH 1

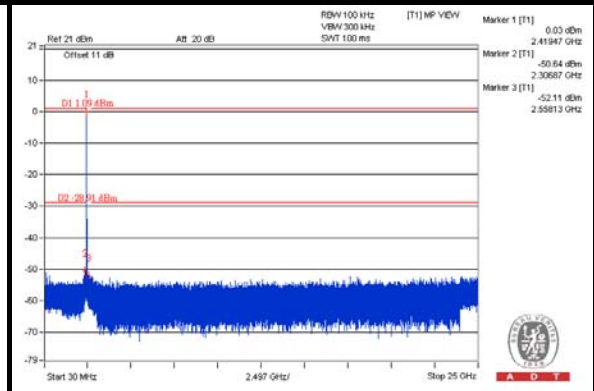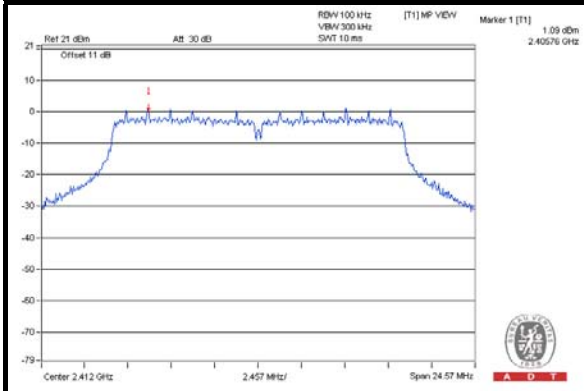


CH 6

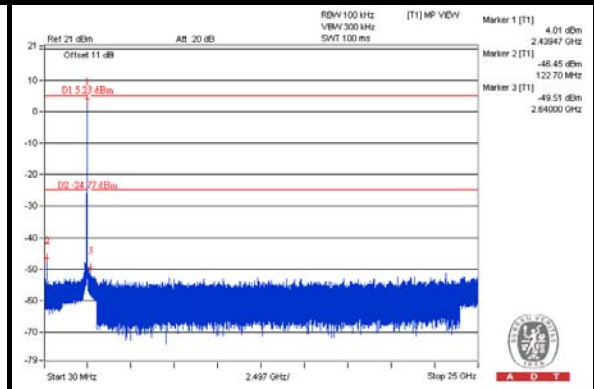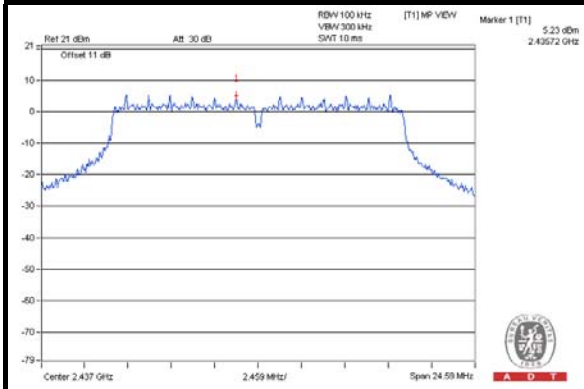


CH 11

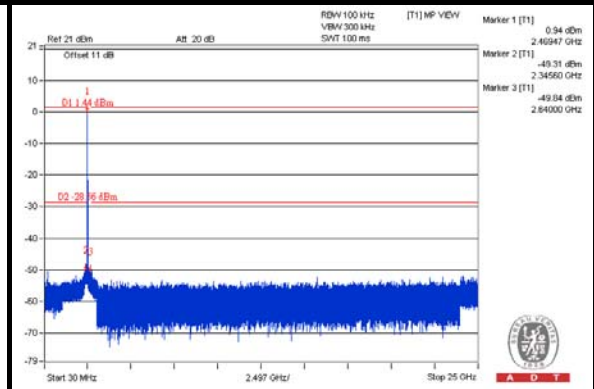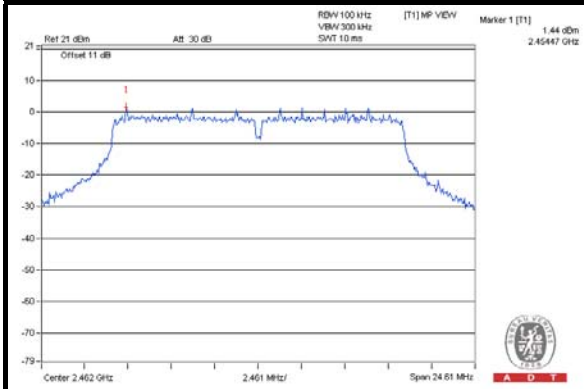

CH 1 Band edge

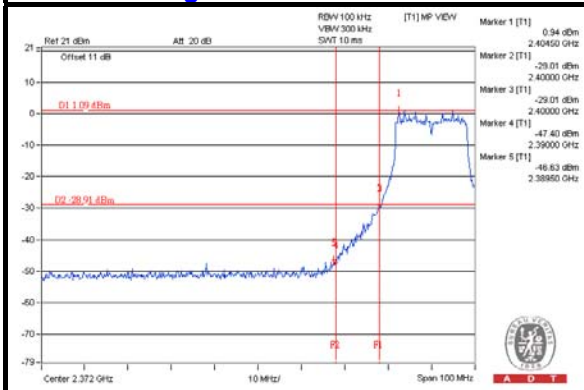

CH 11 Band edge

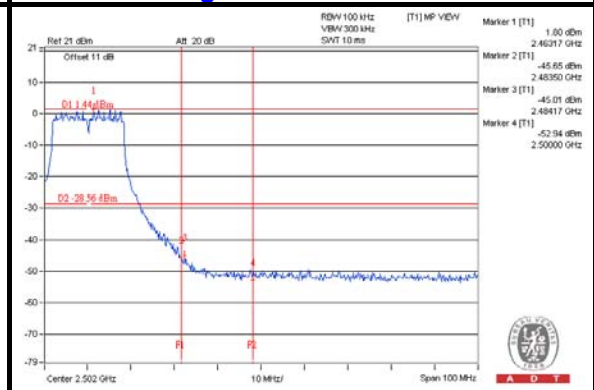





A D T

CHAIN 1


CH 1

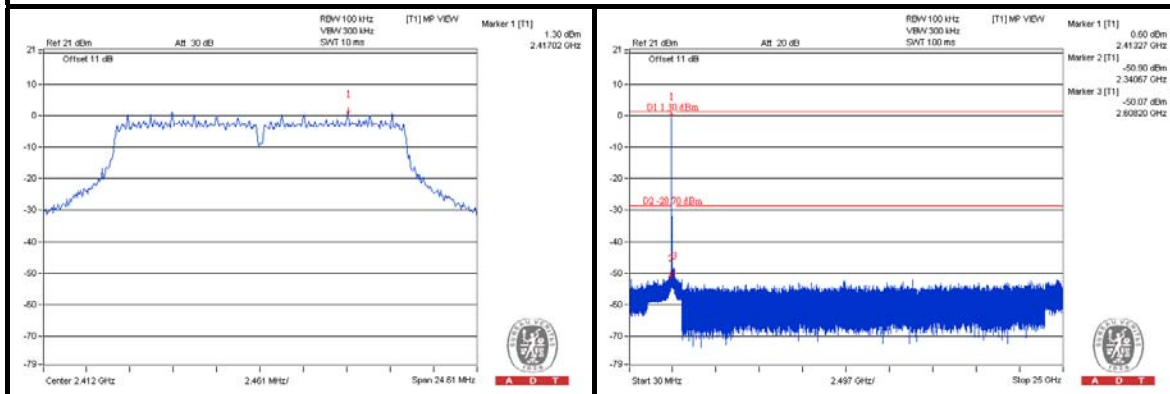


CH 6

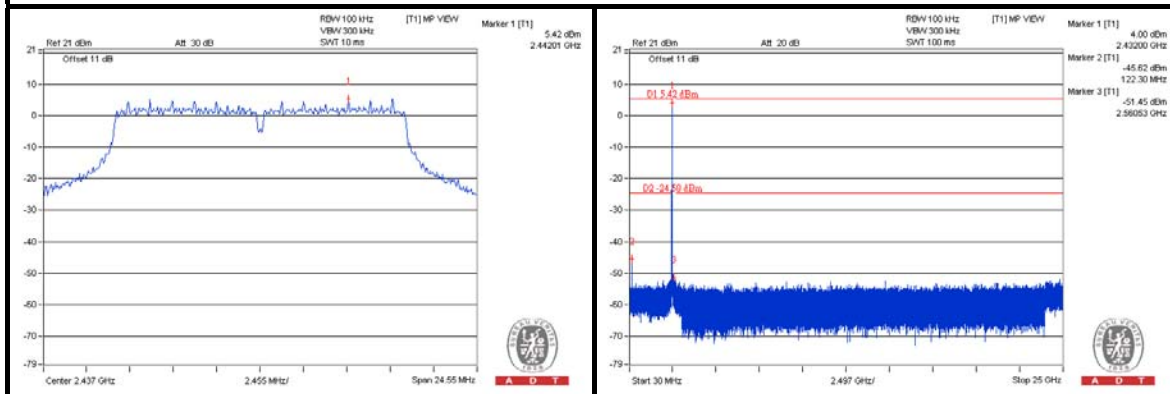


CH 11

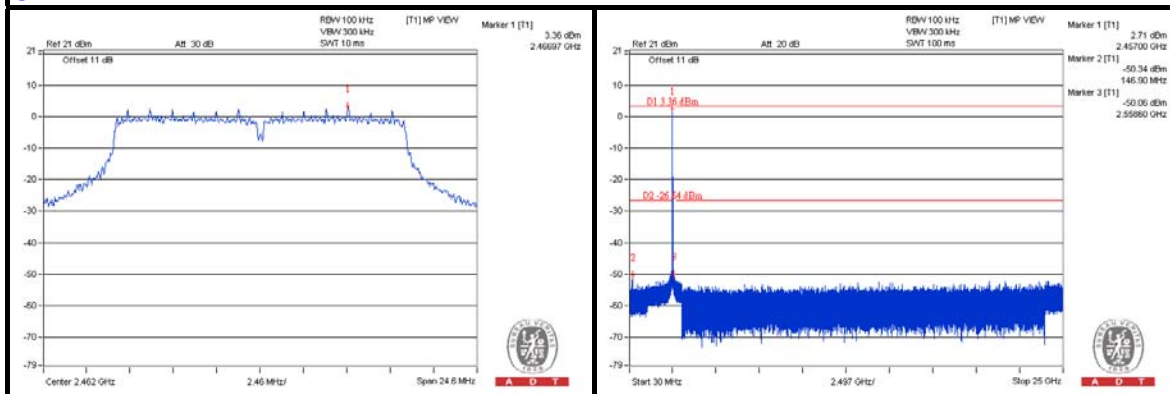

CH 1 Band edge

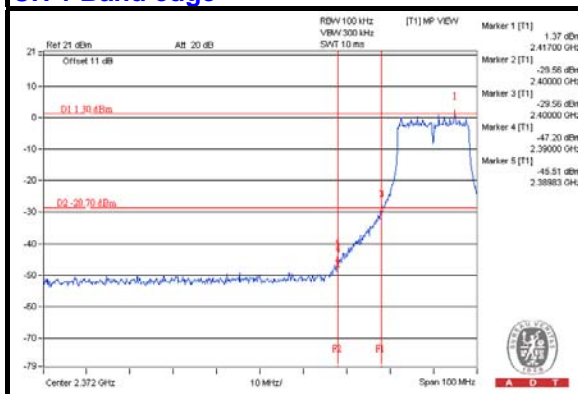

CH 11 Band edge


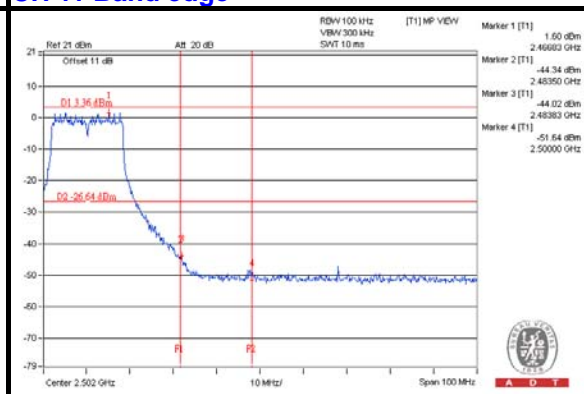






A D T

CHAIN 2



CH 1

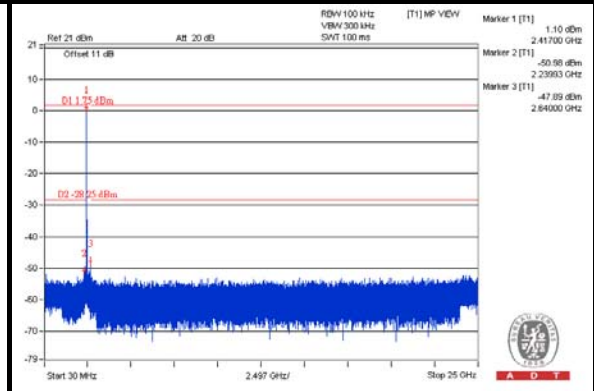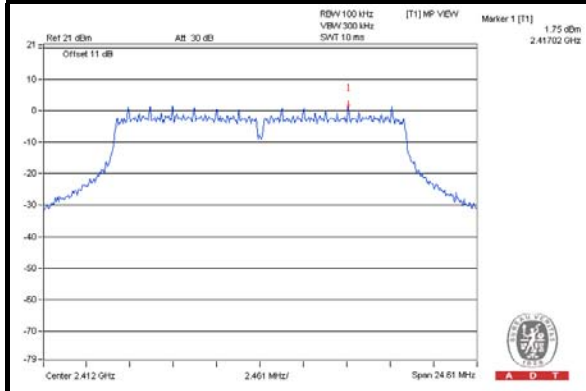


CH 6

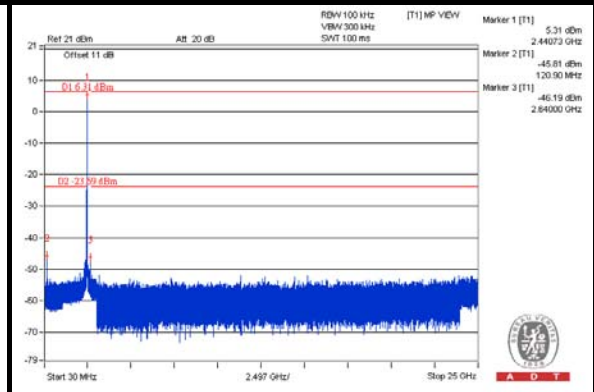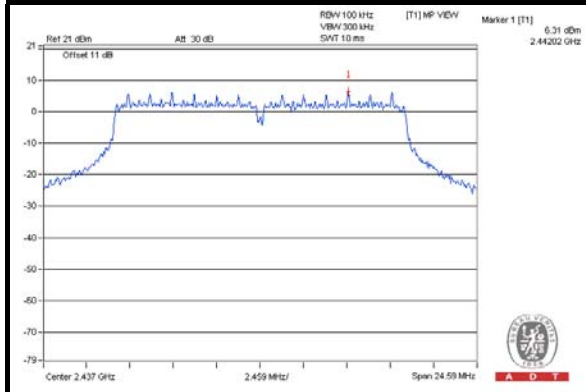


CH 11

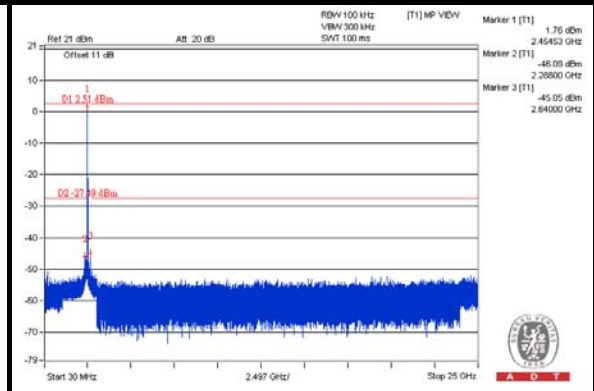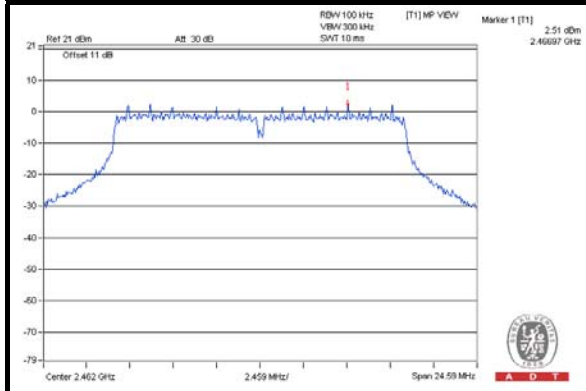

CH 1 Band edge

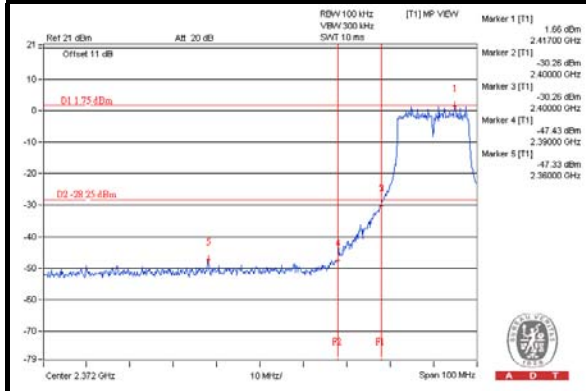

CH 11 Band edge

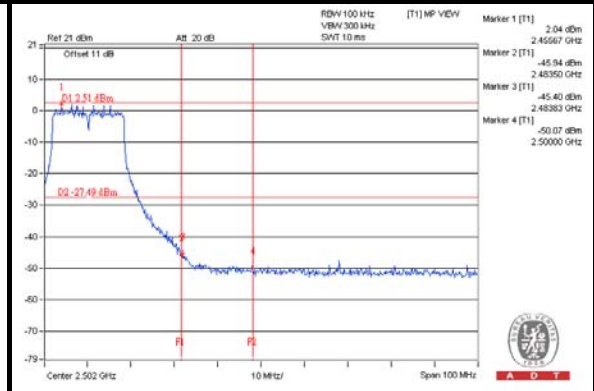





A D T

802.11n (20MHz) CHAIN 0


CH 1

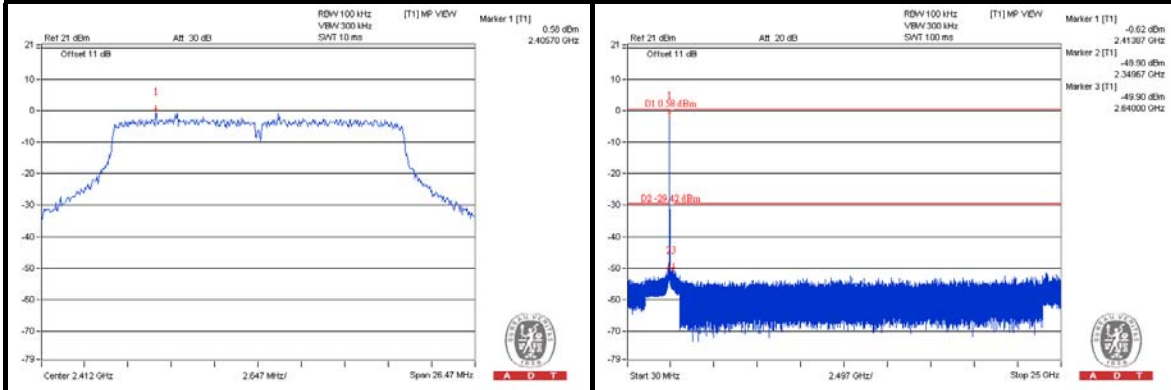


CH 6

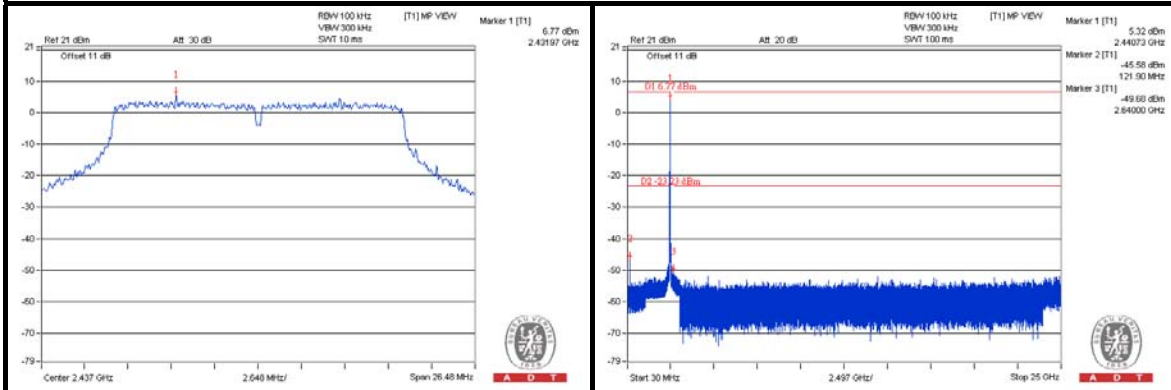


CH 11

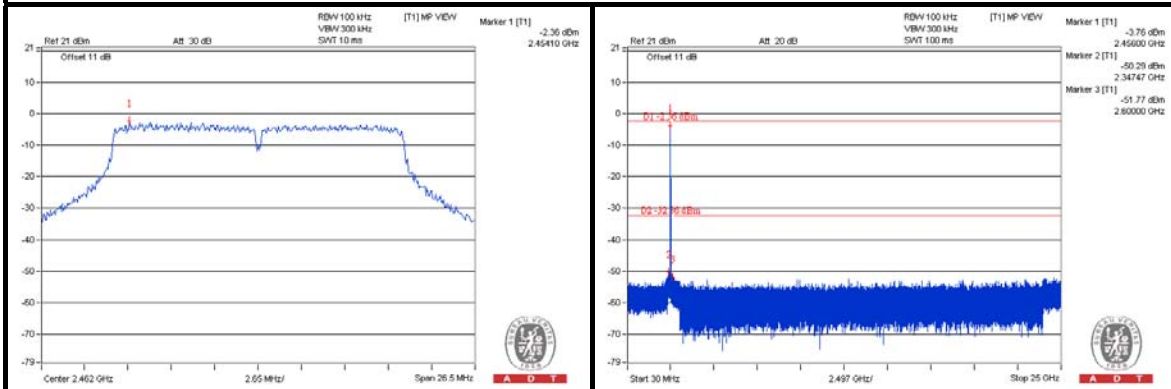

CH 1 Band edge

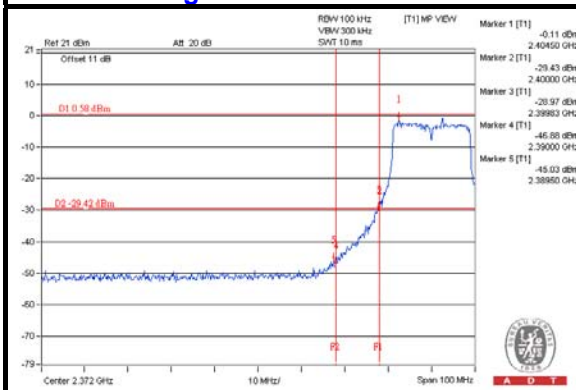

CH 11 Band edge

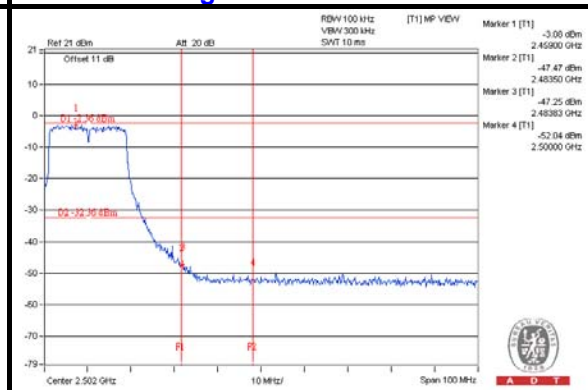





A D T

CHAIN 1


CH 1

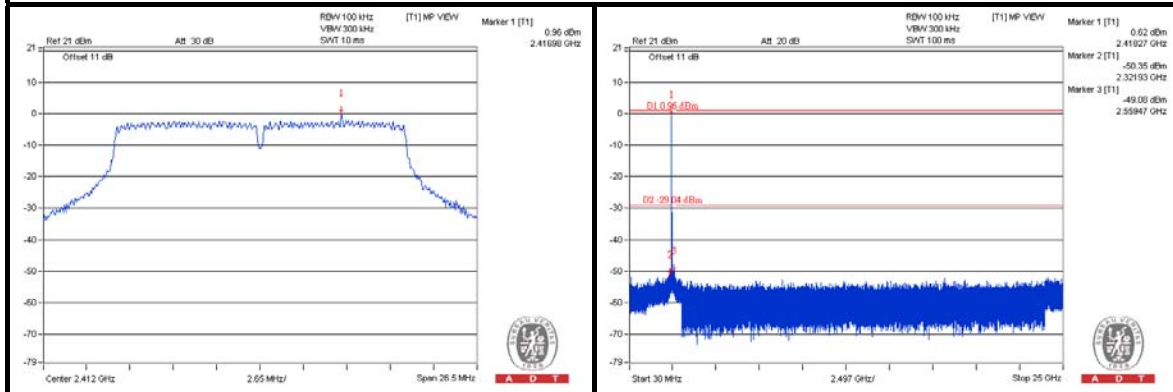


CH 6

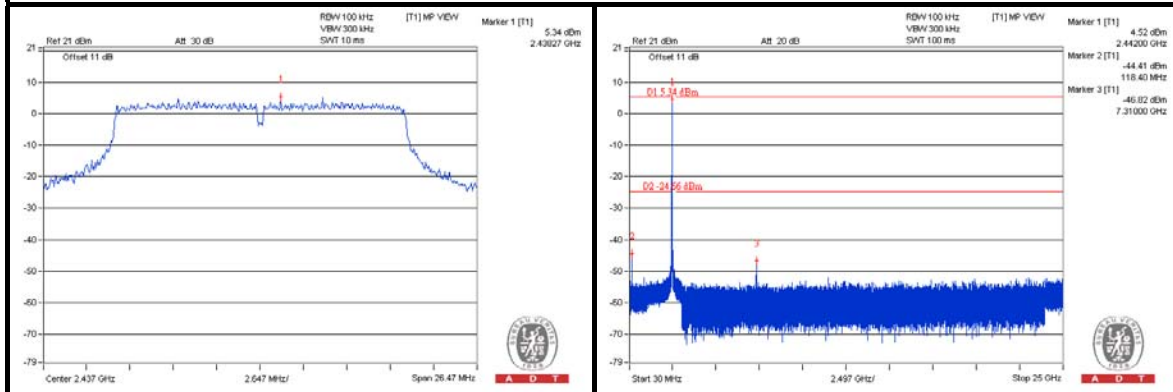


CH 11

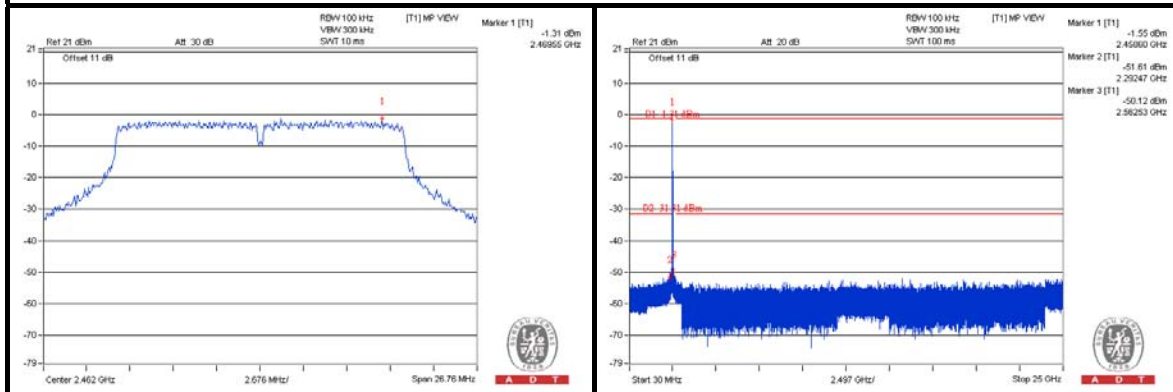

CH 1 Band edge

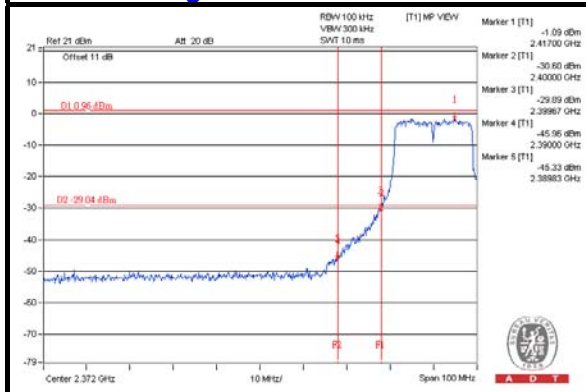

CH 11 Band edge

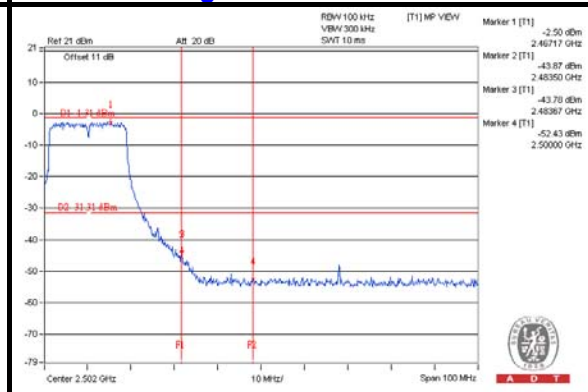





A D T

CHAIN 2


CH 1

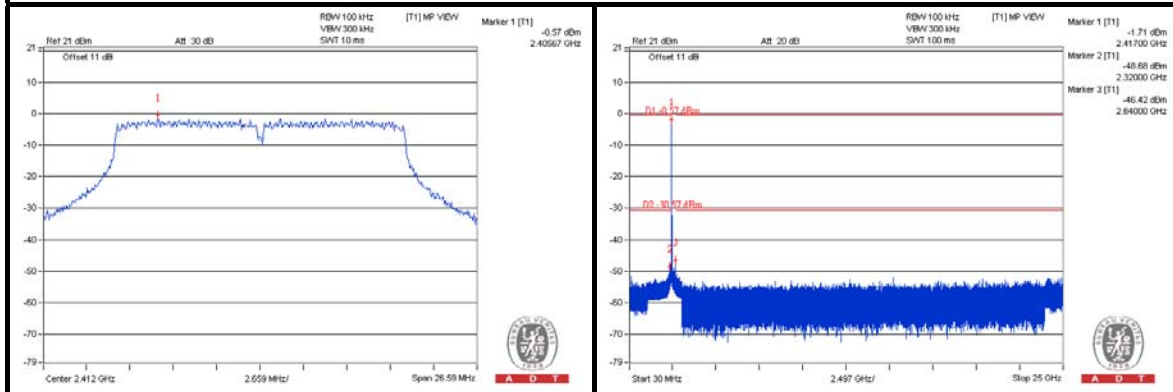


CH 6

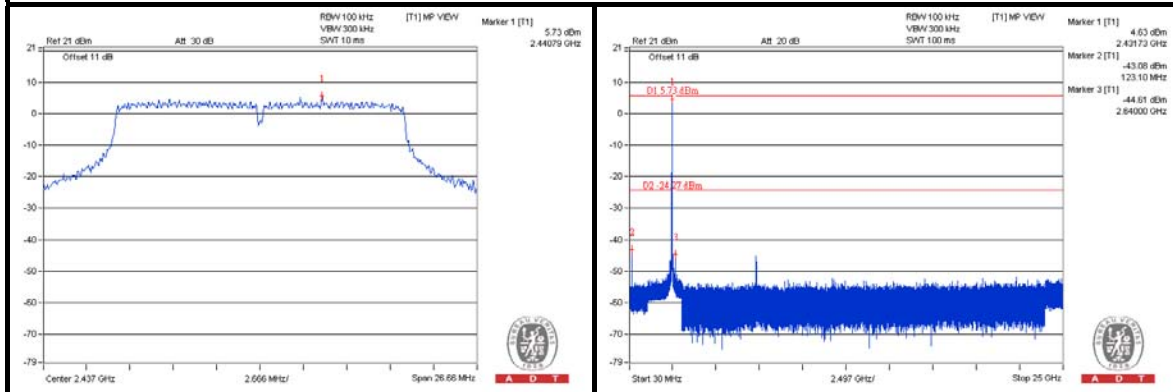

CH 11

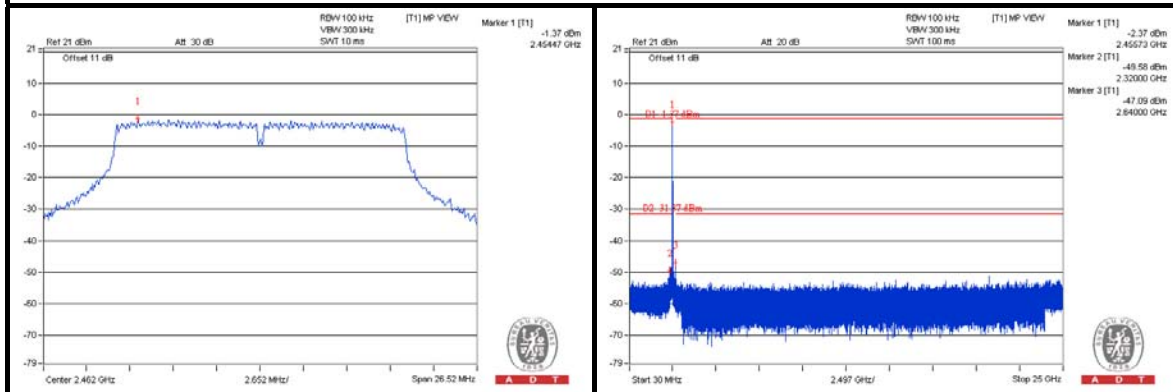

CH 1 Band edge


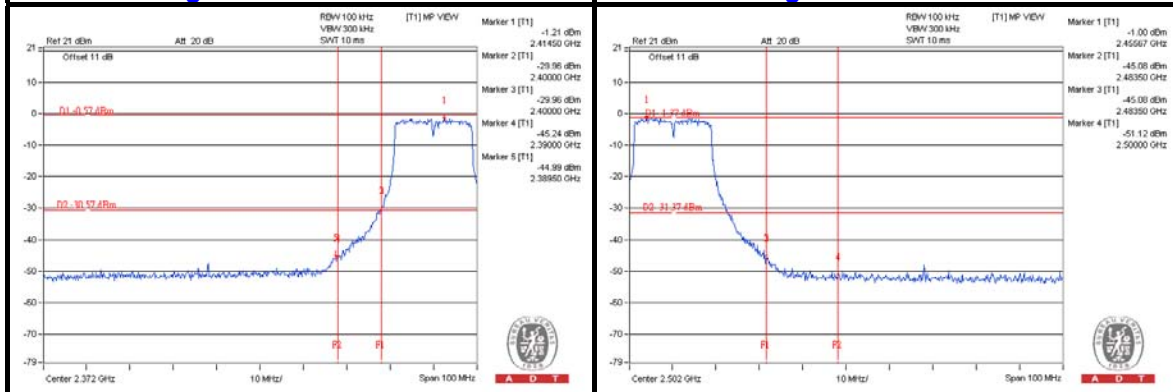






A D T

802.11n (40MHz) CHAIN 0



CH 3

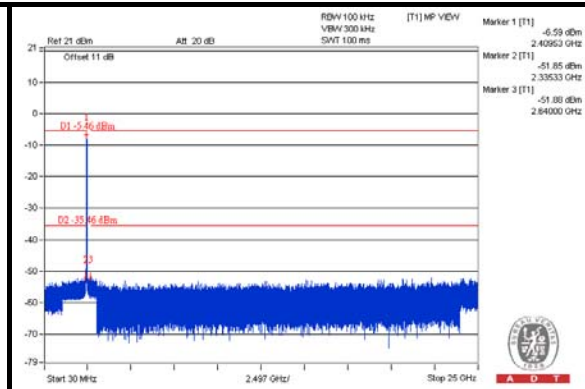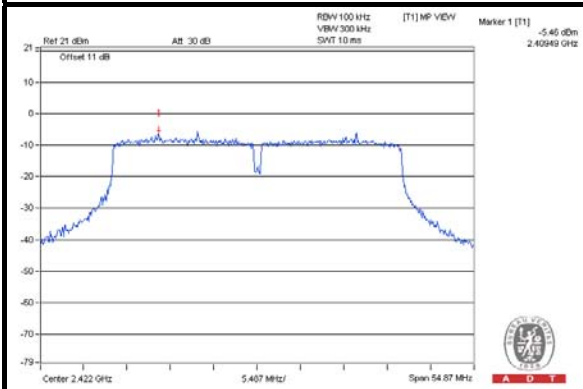


CH 6

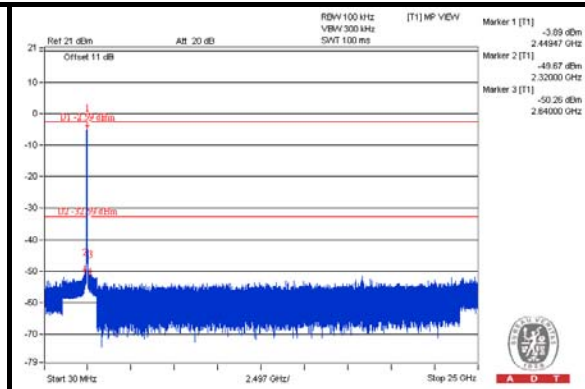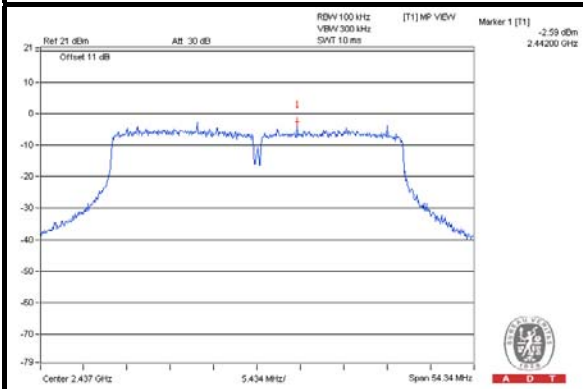


CH 9

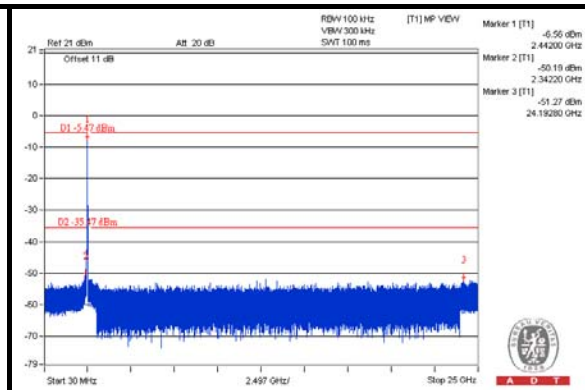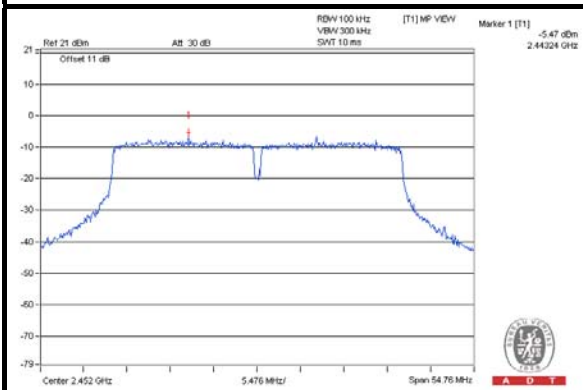

CH 1 Band edge

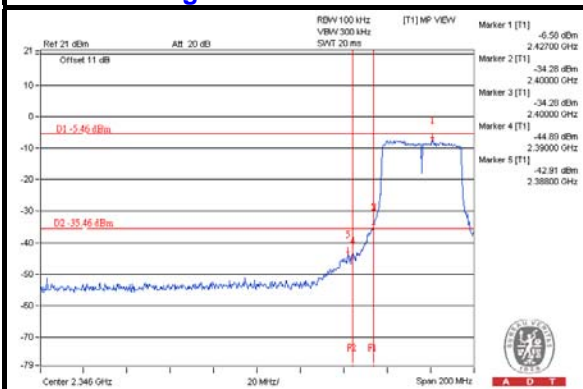

CH 11 Band edge


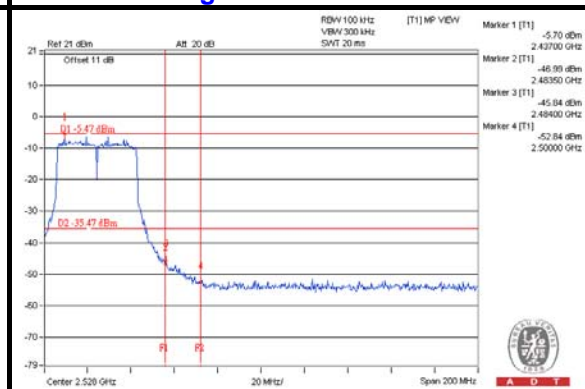






A D T

CHAIN 1



CH 3

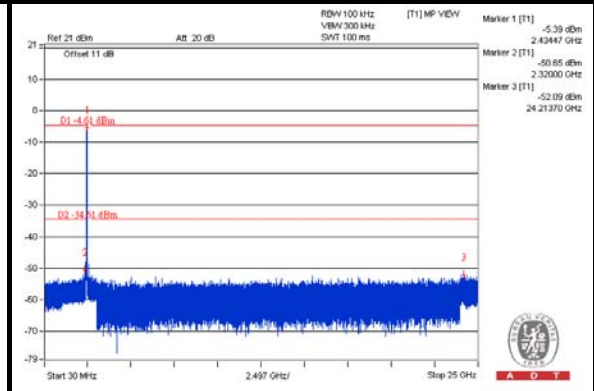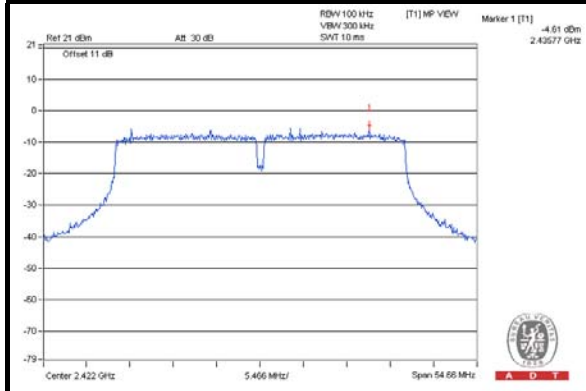


CH 6

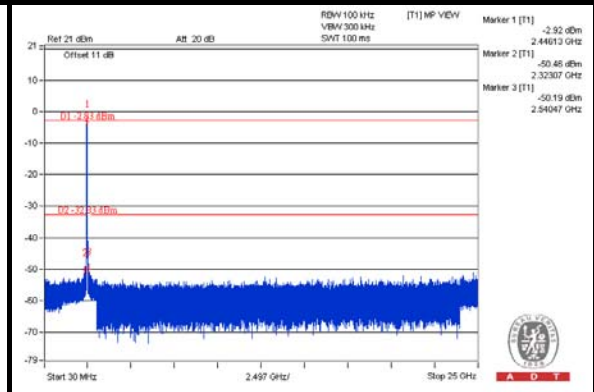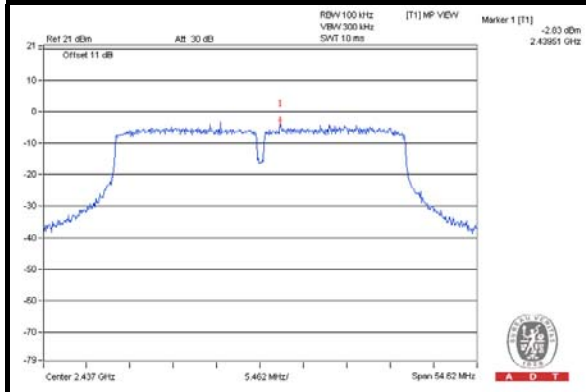


CH 9

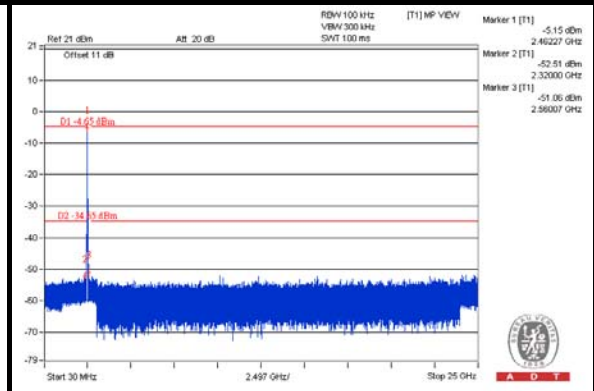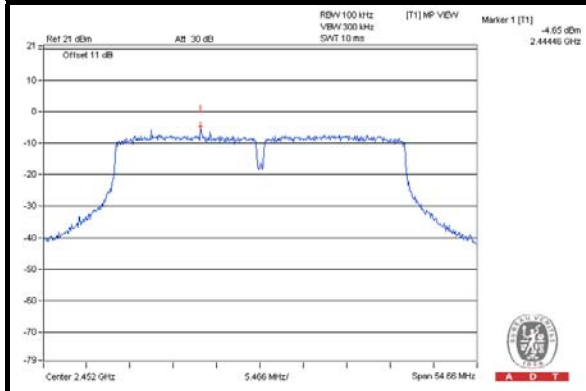

CH 1 Band edge

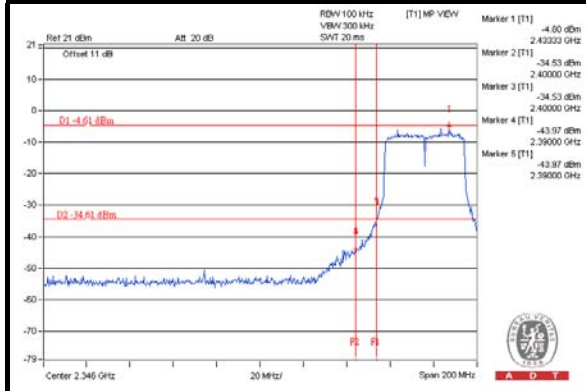

CH 11 Band edge


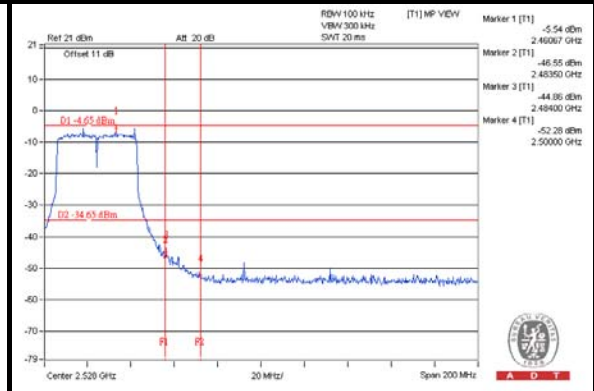






A D T

CHAIN 2



CH 3

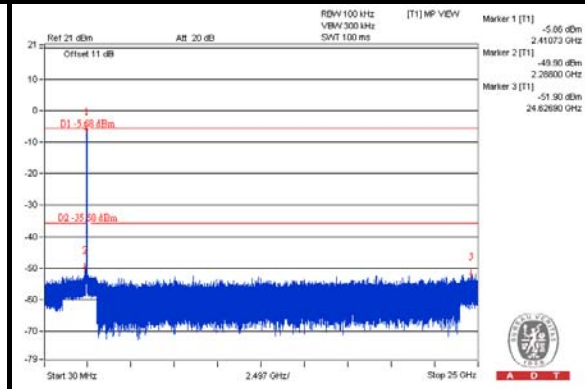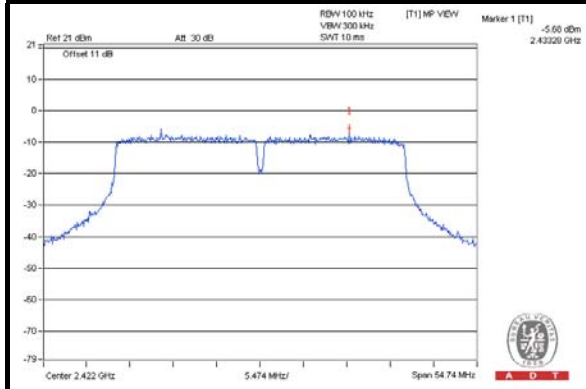


CH 6

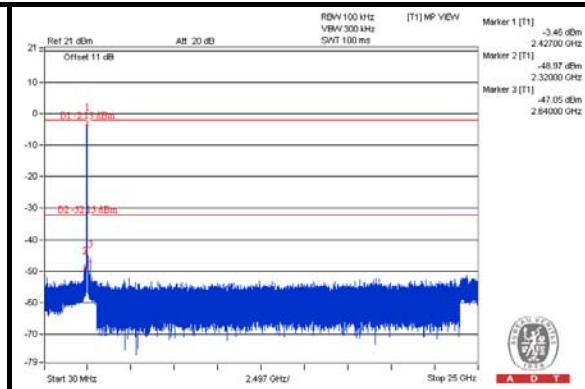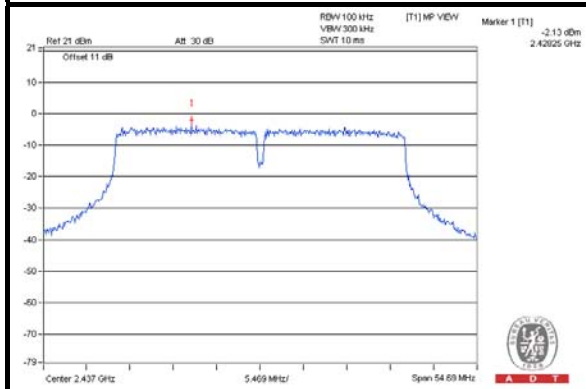


CH 9

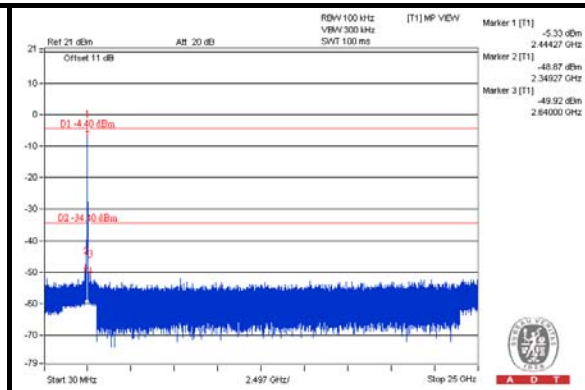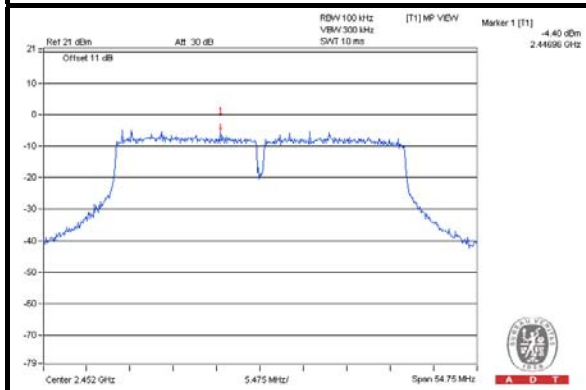

CH 1 Band edge

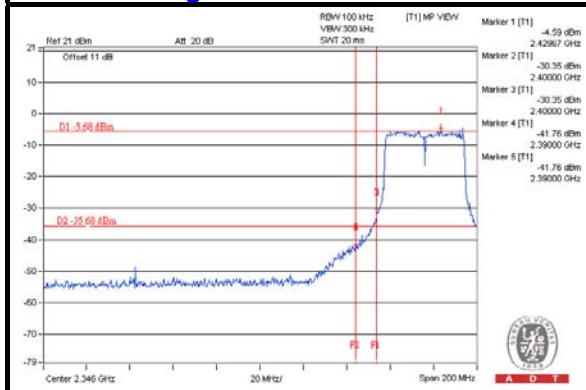

CH 11 Band edge

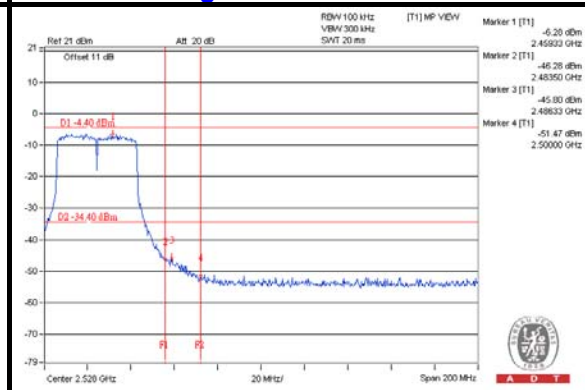



5. TEST TYPES AND RESULTS (FOR 5.0GHz BAND)

5.1 RADIATED EMISSION MEASUREMENT

5.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 30dB under any condition of modulation.



A D T

5.1.2 TEST INSTRUMENTS

Same as item 4.1.2.

5.1.3 TEST PROCEDURES

Same as item 4.1.3.

5.1.4 DEVIATION FROM TEST STANDARD

No deviation.

5.1.5 TEST SETUP

Same as item 4.1.5.

5.1.6 EUT OPERATING CONDITIONS

Same as item 4.1.6.



A D T

5.1.7 TEST RESULTS

ABOVE 1GHz DATA :

802.11a

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 149	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	56.1 PK	73.1	-17.0	1.09 H	12	50.10	6.00
2	#5725.00	46.4 AV	63.4	-17.0	1.09 H	12	40.40	6.00
3	*5745.00	103.1 PK			1.00 H	143	64.60	38.50
4	*5745.00	93.4 AV			1.00 H	143	54.90	38.50
5	11490.00	60.6 PK	74.0	-13.4	1.15 H	96	41.60	19.00
6	11490.00	47.9 AV	54.0	-6.1	1.15 H	96	28.90	19.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	70.6 PK	87.6	-17.0	1.09 V	12	64.60	6.00
2	#5725.00	60.7 AV	77.7	-17.0	1.09 V	12	54.70	6.00
3	*5745.00	117.6 PK			1.09 V	355	79.10	38.50
4	*5745.00	107.7 AV			1.09 V	355	69.20	38.50
5	11490.00	66.1 PK	74.0	-7.9	1.34 V	225	47.10	19.00
6	11490.00	52.9 AV	54.0	-1.1	1.34 V	225	33.90	19.00

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " * ": Fundamental frequency.
- The limit value is defined as per 15.247.
- "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 157	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	102.6 PK			1.00 H	150	64.00	38.60
2	*5785.00	92.9 AV			1.00 H	150	54.30	38.60
3	11570.00	61.3 PK	74.0	-12.7	1.03 H	65	42.30	19.00
4	11570.00	49.2 AV	54.0	-4.8	1.03 H	65	30.20	19.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	117.7 PK			1.16 V	141	79.10	38.60
2	*5785.00	107.3 AV			1.16 V	141	68.70	38.60
3	11570.00	65.8 PK	74.0	-8.2	1.32 V	223	46.80	19.00
4	11570.00	52.9 AV	54.0	-1.1	1.32 V	223	33.90	19.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.
6. The limit value is defined as per 15.247.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 165	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	105.8 PK			1.00 H	154	67.10	38.70
2	*5825.00	94.9 AV			1.00 H	154	56.20	38.70
3	#5850.00	50.8 PK	75.8	-25.0	1.27 H	9	44.60	6.20
4	#5850.00	39.9 AV	64.9	-25.0	1.27 H	9	33.70	6.20
5	11650.00	59.5 PK	74.0	-14.5	1.15 H	88	40.60	18.90
6	11650.00	48.5 AV	54.0	-5.5	1.15 H	88	29.60	18.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	120.4 PK			1.07 V	174	81.70	38.70
2	*5825.00	109.8 AV			1.07 V	174	71.10	38.70
3	#5850.00	65.4 PK	90.4	-25.0	1.27 V	9	59.20	6.20
4	#5850.00	54.8 AV	79.8	-25.0	1.27 V	9	48.60	6.20
5	11650.00	63.0 PK	74.0	-11.0	1.32 V	199	44.10	18.90
6	11650.00	50.6 AV	54.0	-3.4	1.32 V	199	31.70	18.90

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. “#”:The radiated frequency is out the restricted band.



A D T

802.11n (20MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 149	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	53.3 PK	73.3	-20.0	1.20 H	22	47.30	6.00
2	#5725.00	43.2 AV	63.2	-20.0	1.20 H	22	37.20	6.00
3	*5745.00	103.3 PK			1.00 H	156	64.80	38.50
4	*5745.00	93.2 AV			1.00 H	156	54.70	38.50
5	11490.00	61.9 PK	74.0	-12.1	1.15 H	99	42.90	19.00
6	11490.00	49.4 AV	54.0	-4.6	1.15 H	99	30.40	19.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	66.3 PK	86.7	-20.4	1.10 V	10	60.30	6.00
2	#5725.00	57.3 AV	77.3	-20.0	1.10 V	10	51.30	6.00
3	*5745.00	116.7 PK			1.08 V	176	78.20	38.50
4	*5745.00	107.3 AV			1.08 V	176	68.80	38.50
5	11490.00	67.0 PK	74.0	-7.0	1.24 V	224	48.00	19.00
6	11490.00	52.9 AV	54.0	-1.1	1.24 V	224	33.90	19.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 157	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	102.8 PK			1.00 H	155	64.20	38.60
2	*5785.00	93.0 AV			1.00 H	155	54.40	38.60
3	11570.00	61.9 PK	74.0	-12.1	1.23 H	69	42.90	19.00
4	11570.00	49.5 AV	54.0	-4.5	1.23 H	69	30.50	19.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	118.5 PK			1.16 V	140	79.90	38.60
2	*5785.00	108.2 AV			1.16 V	140	69.60	38.60
3	11570.00	65.8 PK	74.0	-8.2	1.68 V	228	46.80	19.00
4	11570.00	52.6 AV	54.0	-1.4	1.68 V	228	33.60	19.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.
6. The limit value is defined as per 15.247.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 165	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	103.5 PK			1.00 H	155	64.80	38.70
2	*5825.00	93.5 AV			1.00 H	155	54.80	38.70
3	#5850.00	48.5 PK	73.5	-25.0	1.42 H	69	42.30	6.20
4	#5850.00	38.5 AV	63.5	-25.0	1.42 H	69	32.30	6.20
5	11650.00	61.5 PK	74.0	-12.5	1.15 H	74	42.60	18.90
6	11650.00	50.2 AV	54.0	-3.8	1.15 H	74	31.30	18.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	116.1 PK			1.24 V	139	77.40	38.70
2	*5825.00	106.3 AV			1.24 V	139	67.60	38.70
3	#5850.00	61.1 PK	86.1	-25.0	1.30 V	96	54.90	6.20
4	#5850.00	51.3 AV	76.3	-25.0	1.30 V	96	45.10	6.20
5	11650.00	65.2 PK	74.0	-8.8	1.32 V	221	46.30	18.90
6	11650.00	52.4 AV	54.0	-1.6	1.32 V	221	33.50	18.90

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. “#”:The radiated frequency is out the restricted band.



A D T

802.11n (40MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 151	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	62.0 PK	70.8	-8.8	1.22 H	1	56.00	6.00
2	#5725.00	52.2 AV	61.0	-8.8	1.22 H	1	46.20	6.00
3	*5755.00	100.8 PK			1.00 H	144	62.20	38.60
4	*5755.00	91.0 AV			1.00 H	144	52.40	38.60
5	11510.00	61.6 PK	74.0	-12.4	1.15 H	96	42.60	19.00
6	11510.00	49.4 AV	54.0	-4.6	1.15 H	96	30.40	19.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	75.9 PK	84.7	-8.8	1.22 V	1	69.90	6.00
2	#5725.00	65.9 AV	74.7	-8.8	1.22 V	1	59.90	6.00
3	*5755.00	114.7 PK			1.00 V	139	76.10	38.60
4	*5755.00	104.7 AV			1.00 V	139	66.10	38.60
5	11510.00	63.7 PK	74.0	-10.3	1.26 V	223	44.70	19.00
6	11510.00	51.3 AV	54.0	-2.7	1.26 V	223	32.30	19.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 159	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	100.9 PK			1.00 H	154	62.30	38.60
2	*5795.00	91.1 AV			1.00 H	154	52.50	38.60
3	#5850.00	45.9 PK	70.9	-25.0	1.20 H	249	39.70	6.20
4	#5850.00	36.1 AV	61.1	-25.0	1.20 H	249	29.90	6.20
5	11590.00	61.0 PK	74.0	-13.0	1.14 H	88	42.00	19.00
6	11590.00	50.5 AV	54.0	-3.5	1.14 H	88	31.50	19.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	116.0 PK			1.19 V	352	77.40	38.60
2	*5795.00	106.1 AV			1.19 V	352	67.50	38.60
3	#5850.00	61.0 PK	86.0	-25.0	1.20 V	249	54.80	6.20
4	#5850.00	51.1 AV	76.1	-25.0	1.20 V	249	44.90	6.20
5	11590.00	65.0 PK	74.0	-9.0	1.34 V	223	46.00	19.00
6	11590.00	52.5 AV	54.0	-1.5	1.34 V	223	33.50	19.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. “#”:The radiated frequency is out the restricted band.



A D T

802.11ac (80MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 155	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	67.2 PK	69.4	-2.2	1.28 H	246	61.20	6.00
2	#5725.00	55.9 AV	58.1	-2.2	1.28 H	246	49.90	6.00
3	*5775.00	99.4 PK			1.00 H	157	60.80	38.60
4	*5775.00	88.1 AV			1.00 H	157	49.50	38.60
5	#5850.00	56.9 PK	69.4	-12.5	1.43 H	13	50.70	6.20
6	#5850.00	45.6 AV	58.1	-12.5	1.43 H	13	39.40	6.20
7	11550.00	60.2 PK	74.0	-13.8	1.15 H	148	41.20	19.00
8	11550.00	49.2 AV	54.0	-4.8	1.15 H	148	30.20	19.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	80.4 PK	82.6	-2.2	1.28 V	346	74.40	6.00
2	#5725.00	69.0 AV	71.2	-2.2	1.28 V	346	63.00	6.00
3	*5775.00	112.6 PK			1.20 V	316	74.00	38.60
4	*5775.00	101.2 AV			1.20 V	316	62.60	38.60
5	#5850.00	70.1 PK	82.6	-12.5	1.43 V	13	63.90	6.20
6	#5850.00	58.7 AV	71.2	-12.5	1.43 V	13	52.50	6.20
7	11550.00	63.0 PK	74.0	-11.0	1.27 V	228	44.00	19.00
8	11550.00	50.5 AV	54.0	-3.5	1.27 V	228	31.50	19.00

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " * ": Fundamental frequency.
- The limit value is defined as per 15.247.
- "#":The radiated frequency is out the restricted band.



A D T

BELOW 1GHz WORST-CASE DATA : 802.11ac (80MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 149	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.07	27.0 QP	40.0	-13.0	1.25 H	306	41.90	-14.90
2	154.09	27.1 QP	43.5	-16.4	1.00 H	250	40.60	-13.50
3	375.29	39.2 QP	46.0	-6.8	1.50 H	229	50.10	-10.90
4	625.60	31.2 QP	46.0	-14.8	1.00 H	204	36.70	-5.50
5	875.91	35.1 QP	46.0	-10.9	1.25 H	209	36.10	-1.00
6	961.29	48.4 QP	54.0	-5.6	1.50 H	12	47.70	0.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.07	30.5 QP	40.0	-9.5	1.25 V	323	45.40	-14.90
2	156.03	27.0 QP	43.5	-16.5	1.00 V	139	40.90	-13.90
3	375.29	39.7 QP	46.0	-6.3	1.50 V	165	50.60	-10.90
4	480.07	31.8 QP	46.0	-14.2	1.00 V	159	40.50	-8.70
5	625.60	34.1 QP	46.0	-11.9	1.25 V	267	39.60	-5.50
6	961.29	47.6 QP	54.0	-6.4	1.50 V	189	46.90	0.70

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
 - Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

5.2 CONDUCTED EMISSION MEASUREMENT

5.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

5.2.2 TEST INSTRUMENTS

Same as item 4.2.2.

5.2.3 TEST PROCEDURES

Same as item 4.2.3.

5.2.4 DEVIATION FROM TEST STANDARD

No deviation.

5.2.5 TEST SETUP

Same as item 4.2.5.

5.2.6 EUT OPERATING CONDITIONS

Same as item 4.1.6.

5.2.7 TEST RESULTS


CONDUCTED WORST-CASE DATA : 802.11ac (80MHz)

PHASE	Line 1	6dB BANDWIDTH	9kHz
--------------	--------	----------------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15391	0.11	44.23	29.18	44.34	29.29	65.79
2	0.16955	0.10	42.31	26.88	42.41	26.98	64.98	54.98	-22.57	-28.00
3	0.20865	0.09	38.05	23.43	38.14	23.52	63.26	53.26	-25.12	-29.74
4	0.46301	0.12	28.92	24.65	29.04	24.77	56.64	46.64	-27.60	-21.87
5	1.45203	0.23	17.95	14.07	18.18	14.30	56.00	46.00	-37.82	-31.70
6	3.99744	0.26	15.71	10.03	15.97	10.29	56.00	46.00	-40.03	-35.71

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

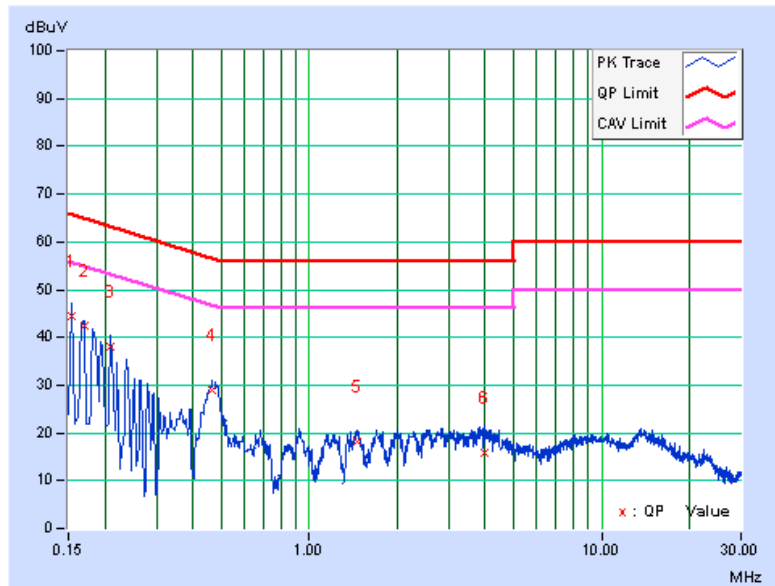




A D T

PHASE	Line 2	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16173	0.06	45.19	30.31	45.25	30.37	65.37	55.37	-20.13	-25.01
2	0.17737	0.07	42.77	27.85	42.84	27.92	64.61	54.61	-21.77	-26.69
3	0.20084	0.09	38.90	23.81	38.99	23.90	63.58	53.58	-24.59	-29.68
4	0.45695	0.17	27.31	22.63	27.48	22.80	56.75	46.75	-29.26	-23.94
5	0.93568	0.21	21.31	16.95	21.52	17.16	56.00	46.00	-34.48	-28.84
6	3.82149	0.26	19.27	14.46	19.53	14.72	56.00	46.00	-36.47	-31.28

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

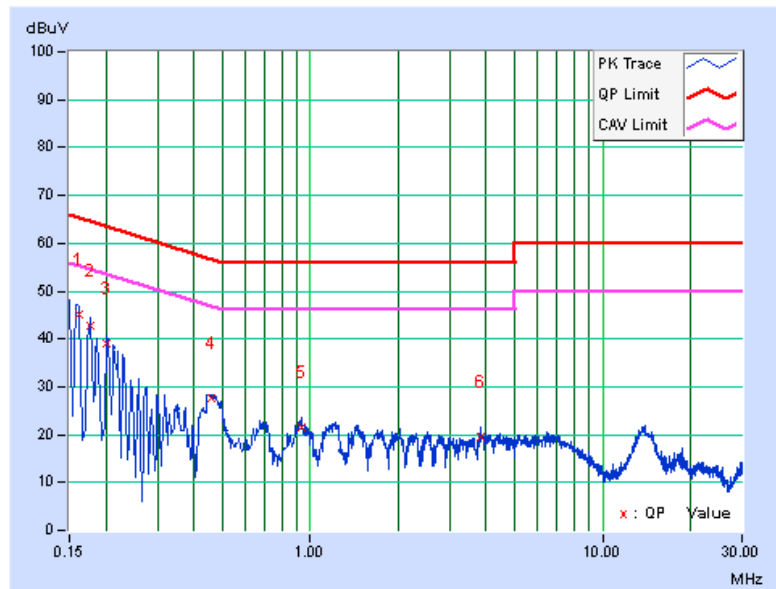



A D T

5.3 6dB BANDWIDTH MEASUREMENT

5.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

5.3.2 TEST SETUP

Same as item 4.3.2.

5.3.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

5.3.4 TEST PROCEDURE

Same as item 4.3.4.

5.3.5 DEVIATION FROM TEST STANDARD

No deviation.

5.3.6 EUT OPERATING CONDITIONS

Same as item 4.3.6.



5.3.7 TEST RESULTS

802.11a

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)			MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
149	5745	16.36	16.39	16.39	0.5	PASS
157	5785	16.37	16.39	16.37	0.5	PASS
165	5825	16.37	16.41	16.39	0.5	PASS

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)			MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
149	5745	17.59	17.56	17.62	0.5	PASS
157	5785	17.58	17.59	17.62	0.5	PASS
165	5825	17.58	17.58	17.63	0.5	PASS

802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)			MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
151	5755	36.38	36.14	36.39	0.5	PASS
159	5795	36.12	36.44	36.09	0.5	PASS

802.11ac (80MHz)


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)			MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
155	5775	76.34	75.36	75.89	0.5	PASS




A D T

SPECTRUM PLOT OF WORST VALUE


802.11a

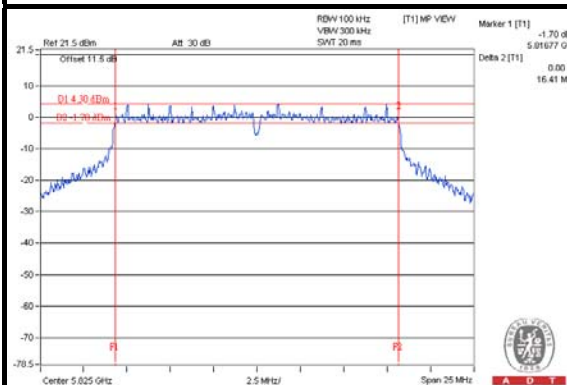


802.11n (20MHz)

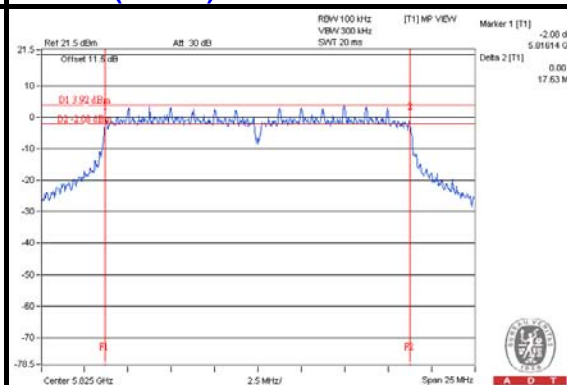

802.11n (40MHz)

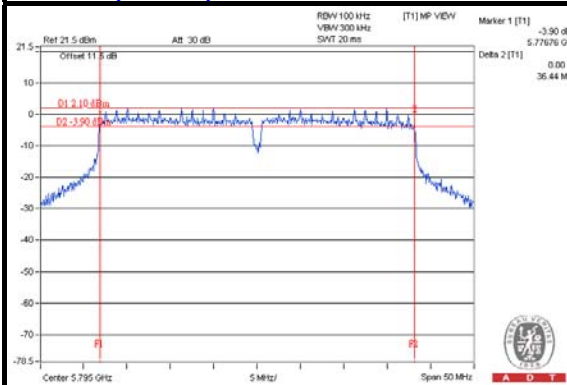

802.11ac (80MHz)

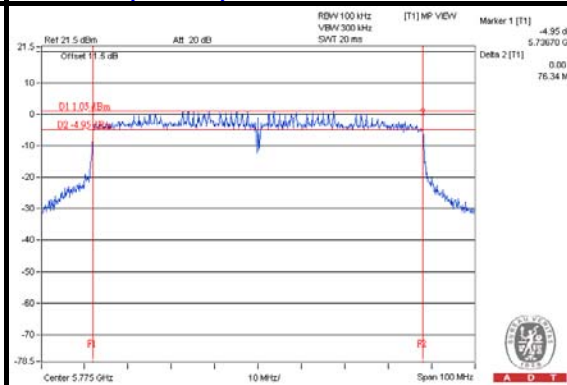

5.4 CONDUCTED OUTPUT POWER

5.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 5725 –5850 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output v02r01 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for NANT \leq 4;


Array Gain = 0 dB (i.e., no array gain) for channel widths \geq 40 MHz for any NANT;

Array Gain = 5 log(NANT/NSS) dB or 3 dB, whichever is less for 20-MHz channel widths with NANT \geq 5.

For power measurements on all other devices: Array Gain = 10 log(NANT/NSS) dB.

5.4.2 TEST SETUP

For 802.11a, 802.11n (20MHz), 802.11n (40MHz)

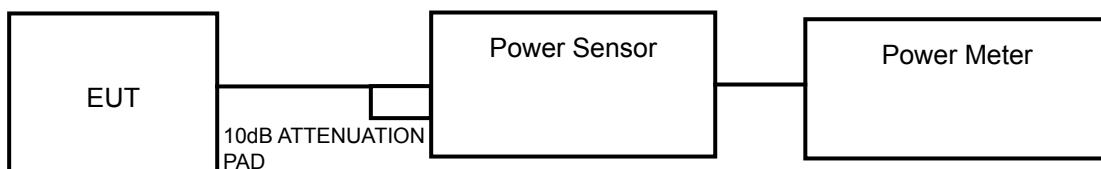

For 802.11ac (80MHz)



5.4.3 INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.



A D T

5.4.4 TEST PROCEDURES

Follow KDB 558074 D01 DTS Meas Guidance v03r01 section 9.1.3

For 802.11a, 802.11n (20MHz), 802.11n (40MHz)

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

Follow KDB 558074 D01 DTS Meas Guidance v03r01 section 9.1.2

For 802.11ac (80MHz)

Integrated band power method

This procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.

- 1) Set the RBW = 1 MHz.
- 2) Set the VBW \geq 3 RBW
- 3) Set the span \geq 1.5 x DTS bandwidth.
- 4) Detector = peak.
- 5) Sweep time = auto couple.
- 6) Trace mode = max hold.
- 7) Allow trace to fully stabilize.
- 8) Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select peak detector). If the instrument does not have a band power function, sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS bandwidth.

5.4.5 DEVIATION FROM TEST STANDARD

No deviation.

5.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.



5.4.7 TEST RESULTS

802.11a

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
149	5745	15.52	14.46	14.45	91.431	19.61	30	PASS
157	5785	14.70	14.15	13.60	78.423	18.94	30	PASS
165	5825	17.04	15.24	15.20	117.115	20.69	30	PASS

802.11n (20MHz)

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
149	5745	15.56	14.49	14.61	93.001	19.68	30	PASS
157	5785	15.67	14.70	14.58	95.118	19.78	30	PASS
165	5825	15.90	14.48	14.23	93.444	19.71	30	PASS

802.11n (40MHz)

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
151	5755	16.57	15.87	15.83	122.313	20.87	30	PASS
159	5795	16.62	15.75	15.40	118.178	20.73	30	PASS

802.11ac (80MHz)

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
155	5775	17.43	16.62	16.47	145.616	21.63	30	PASS



A D T

5.5 POWER SPECTRAL DENSITY MEASUREMENT

5.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

5.5.2 TEST SETUP

Same as item 4.5.2.

5.5.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

5.5.4 TEST PROCEDURE.

Same as item 4.5.4.

5.5.5 DEVIATION FROM TEST STANDARD

No deviation.

5.5.6 EUT OPERATING CONDITION

Same as item 4.3.6.



5.5.7 TEST RESULTS

802.11a

TX chain	Chan.	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=3) dB	Total PSD W/O DUTY FACTOR (dBm/3kHz)	DUTY FACTOR	Total PSD WITH DUTY FACTOR (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	149	5745	-17.81	4.77	-13.17	0.13	-13.04	5.13	PASS
	157	5785	-18.04	4.77	-13.40	0.13	-13.27	5.13	PASS
	165	5825	-16.37	4.77	-11.73	0.13	-11.60	5.13	PASS
1	149	5745	-18.47	4.77	-13.83	0.13	-13.70	5.13	PASS
	157	5785	-18.67	4.77	-14.03	0.13	-13.90	5.13	PASS
	165	5825	-16.86	4.77	-12.22	0.13	-12.09	5.13	PASS
2	149	5745	-18.31	4.77	-13.67	0.13	-13.54	5.13	PASS
	157	5785	-18.96	4.77	-14.32	0.13	-14.19	5.13	PASS
	165	5825	-17.76	4.77	-13.12	0.13	-12.99	5.13	PASS

NOTE: Directional gain = $4.1\text{dBi} + 10\log(3) = 8.87\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(8.87-6) = 5.13\text{dBm}$.

802.11n (20MHz)

TX chain	Chan.	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=3) dB	Total PSD W/O DUTY FACTOR (dBm/3kHz)	DUTY FACTOR	Total PSD WITH DUTY FACTOR (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	149	5745	-16.96	4.77	-12.33	0.14	-12.19	5.13	PASS
	157	5785	-17.15	4.77	-12.52	0.14	-12.38	5.13	PASS
	165	5825	-17.87	4.77	-13.24	0.14	-13.10	5.13	PASS
1	149	5745	-17.83	4.77	-13.20	0.14	-13.06	5.13	PASS
	157	5785	-16.99	4.77	-12.36	0.14	-12.22	5.13	PASS
	165	5825	-18.48	4.77	-13.85	0.14	-13.71	5.13	PASS
2	149	5745	-18.71	4.77	-14.08	0.14	-13.94	5.13	PASS
	157	5785	-18.76	4.77	-14.13	0.14	-13.99	5.13	PASS
	165	5825	-18.82	4.77	-14.19	0.14	-14.05	5.13	PASS

NOTE: Directional gain = $4.1\text{dBi} + 10\log(3) = 8.87\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(8.87-6) = 5.13\text{dBm}$.



A D T

802.11n (40MHz)

TX chain	Chan.	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=3) dB	Total PSD W/O DUTY FACTOR (dBm/3kHz)	DUTY FACTOR	Total PSD WITH DUTY FACTOR (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	151	5755	-19.90	4.77	-15.41	0.28	-15.13	5.13	PASS
	159	5795	-19.82	4.77	-15.33	0.28	-15.05	5.13	PASS
1	151	5755	-19.83	4.77	-15.34	0.28	-15.06	5.13	PASS
	159	5795	-19.39	4.77	-14.90	0.28	-14.62	5.13	PASS
2	151	5755	-20.13	4.77	-15.64	0.28	-15.36	5.13	PASS
	159	5795	-19.94	4.77	-15.45	0.28	-15.17	5.13	PASS

NOTE: Directional gain = $4.1\text{dBi} + 10\log(3) = 8.87\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(8.87-6) = 5.13\text{dBm}$.

802.11ac (80MHz)

TX chain	Chan.	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=3) dB	Total PSD W/O DUTY FACTOR (dBm/3kHz)	DUTY FACTOR	Total PSD WITH DUTY FACTOR (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	155	5775	-22.06	4.77	-17.79	0.50	-17.29	5.13	PASS
1	155	5775	-22.59	4.77	-18.32	0.50	-17.82	5.13	PASS
2	155	5775	-22.69	4.77	-18.42	0.50	-17.92	5.13	PASS


NOTE: Directional gain = $4.1\text{dBi} + 10\log(3) = 8.87\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(8.87-6) = 5.13\text{dBm}$.




A D T

SPECTRUM PLOT OF WORST VALUE


802.11a

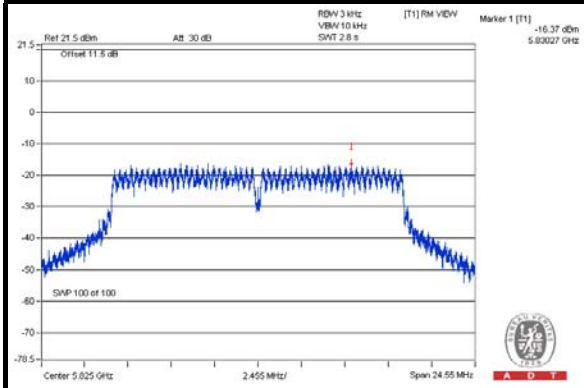


802.11n (20MHz)

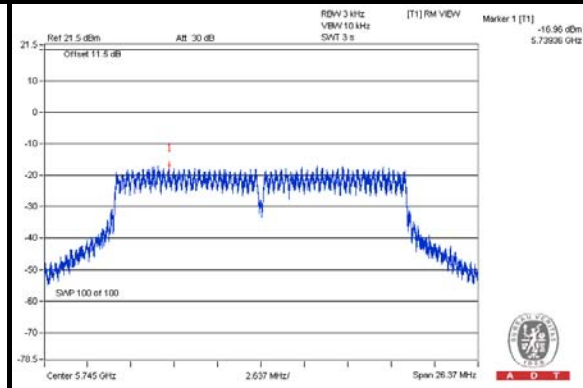

802.11n (40MHz)

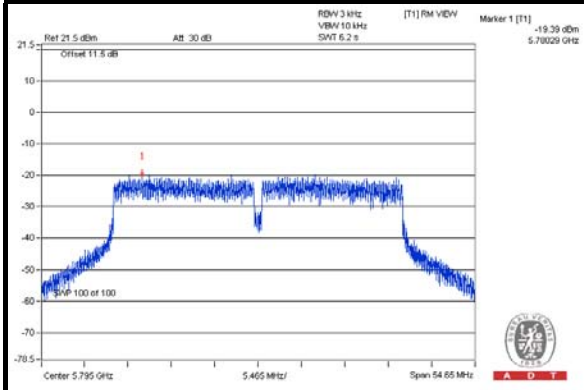

802.11ac (80MHz)

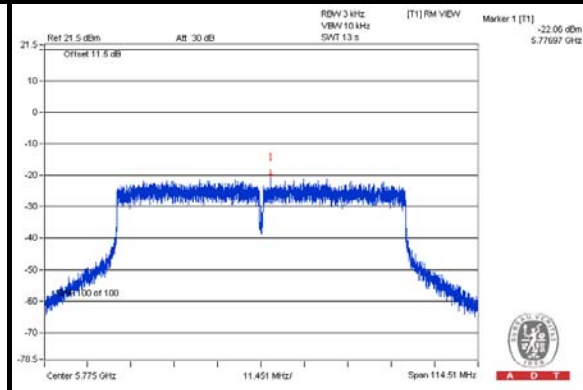



A D T

5.6 CONDUCTED OUT OF BAND EMISSION MEASUREMENT

5.6.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT

Below -30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

5.6.2 TEST SETUP

Same as Item 4.6.2

5.6.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

5.6.4 TEST PROCEDURE

Same as Item 4.6.4

5.6.5 DEVIATION FROM TEST STANDARD

No deviation.

5.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6

5.6.7 TEST RESULTS

The conducted emission test is performed on each TX port of operating mode without summing or adding $10\log(N)$ since the limit is relative emission limit.


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.




A D T

802.11a CHAIN 0


CH 149

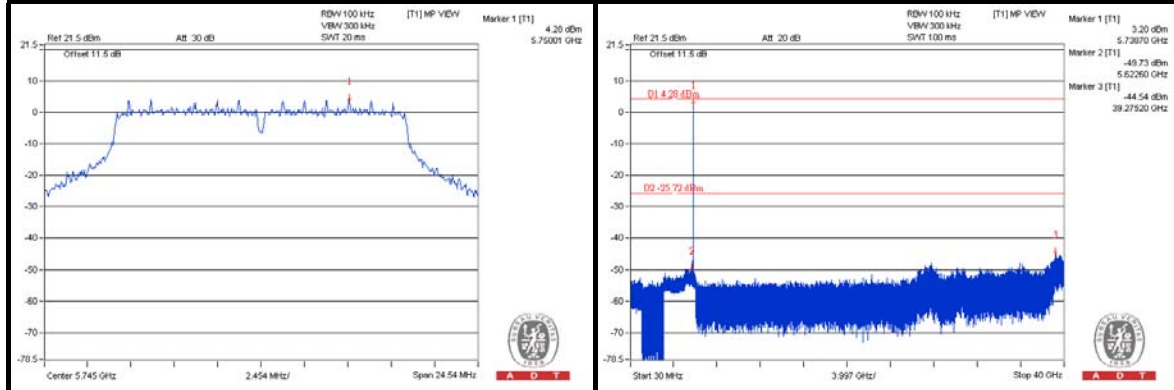


CH 157

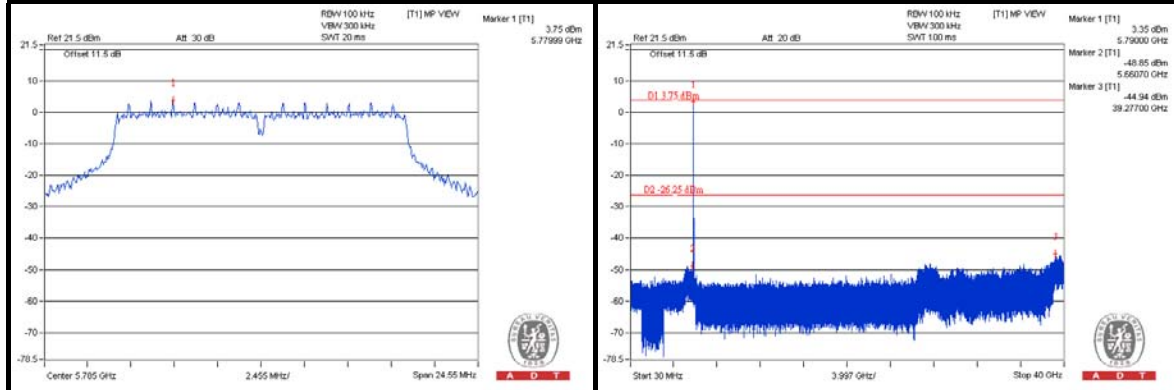


CH 165

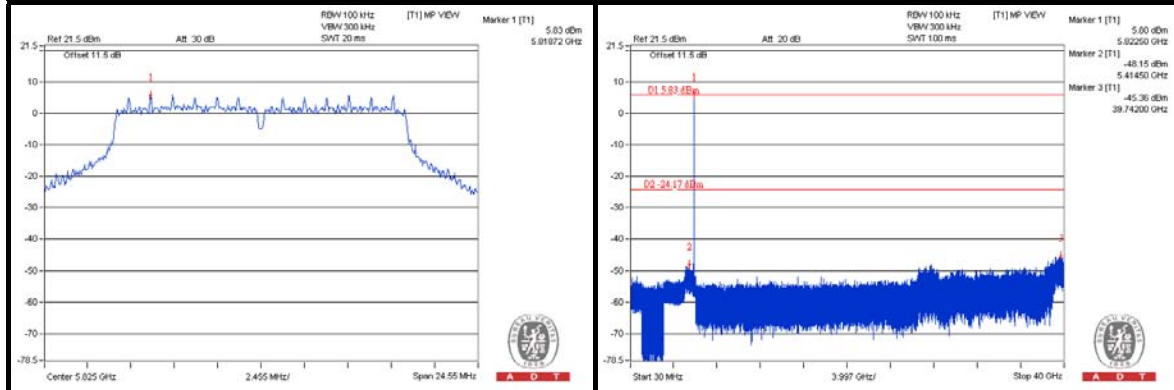

CH 149 Band edge

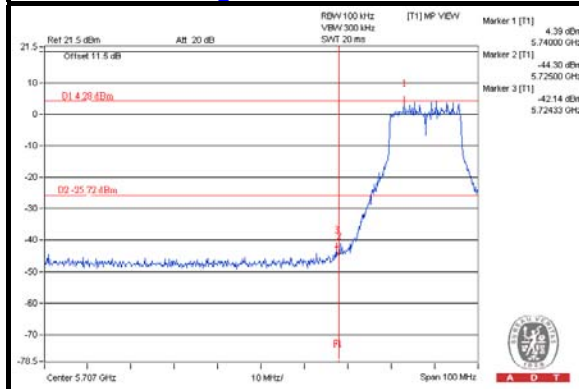

CH 165 Band edge


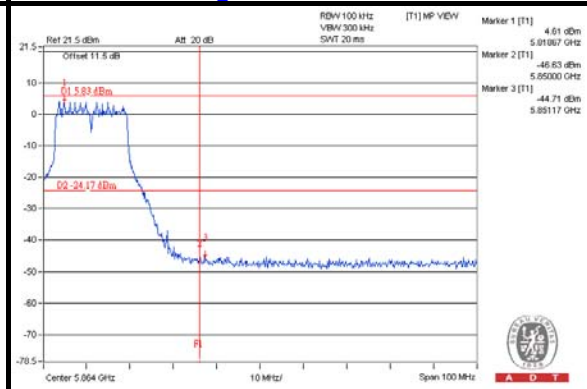






A D T

CHAIN 1



CH 149

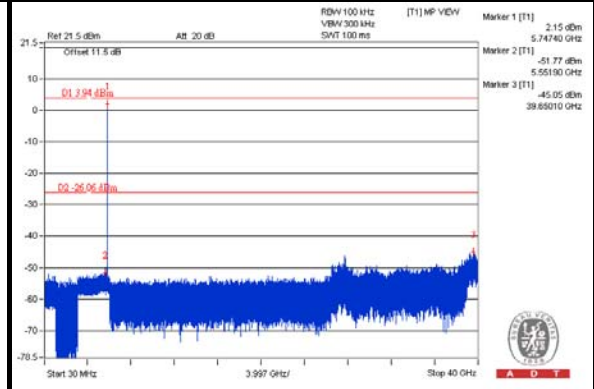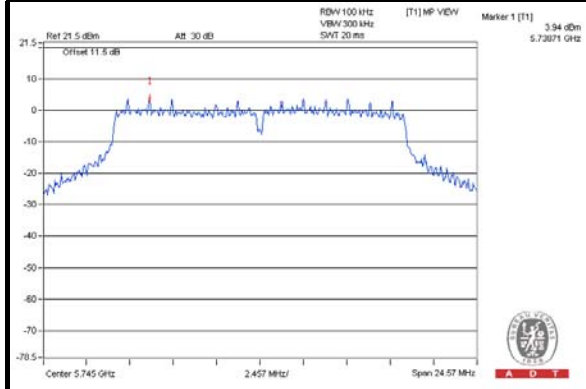


CH 157

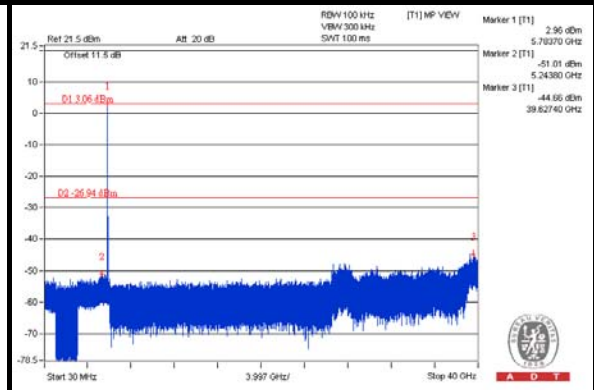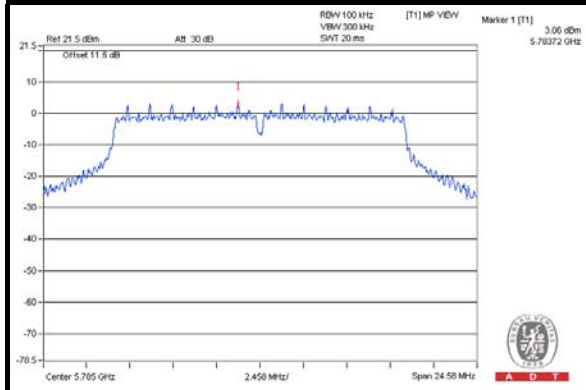


CH 165

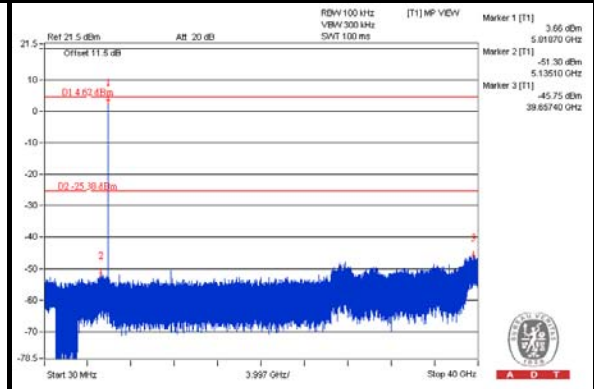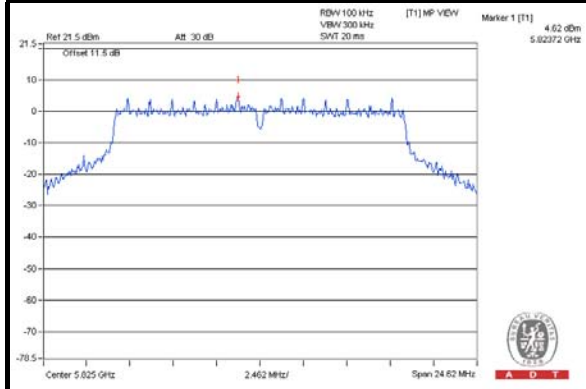

CH 149 Band edge

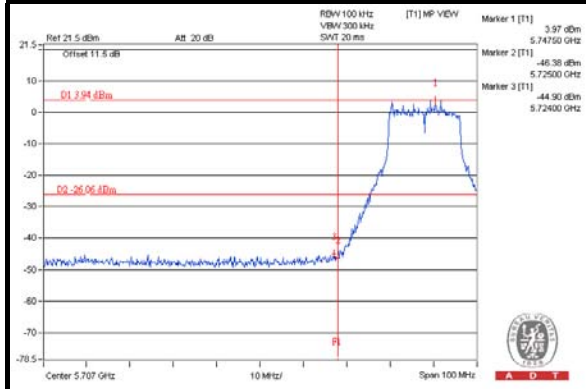

CH 165 Band edge

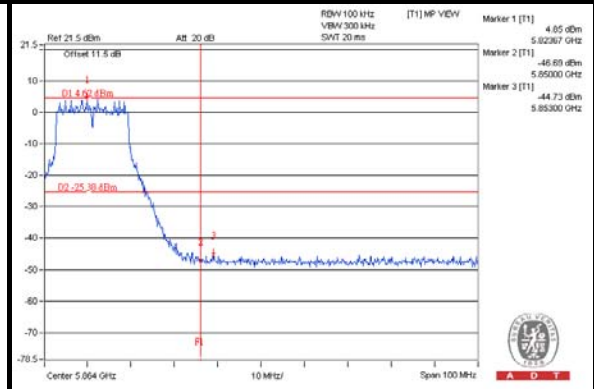





A D T

CHAIN 2


CH 149

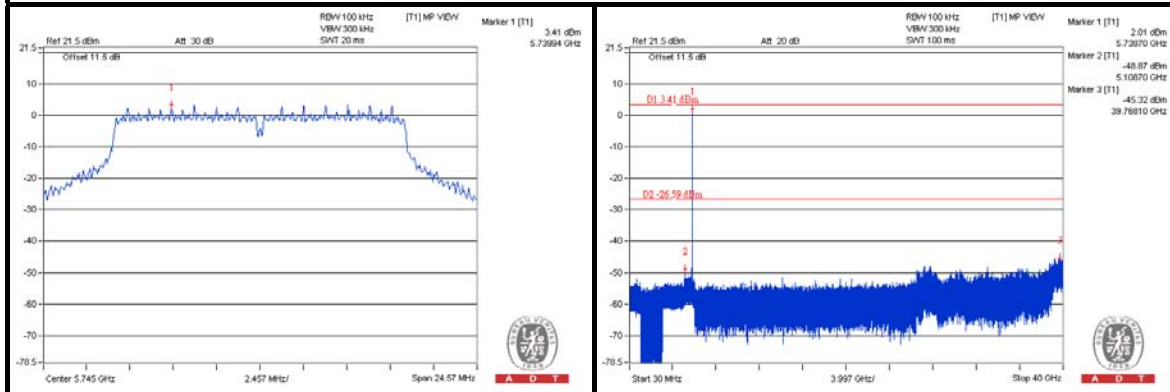


CH 157

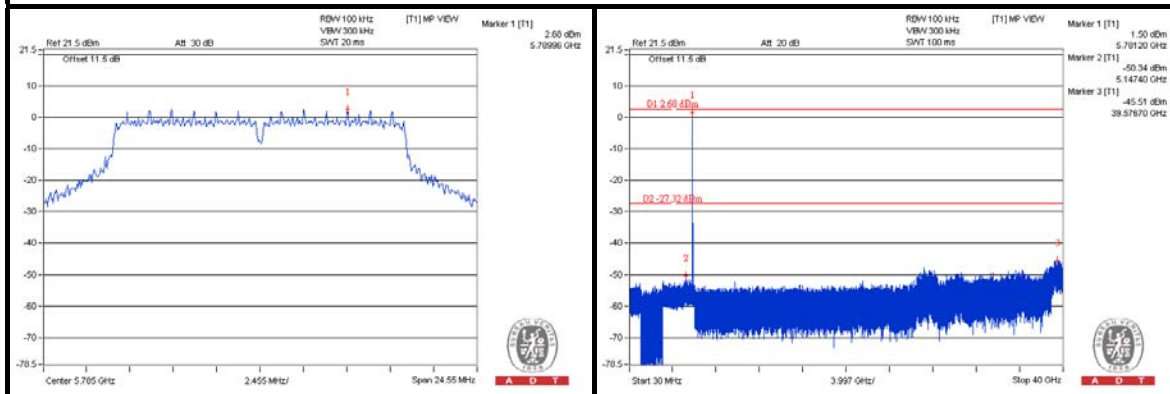


CH 165

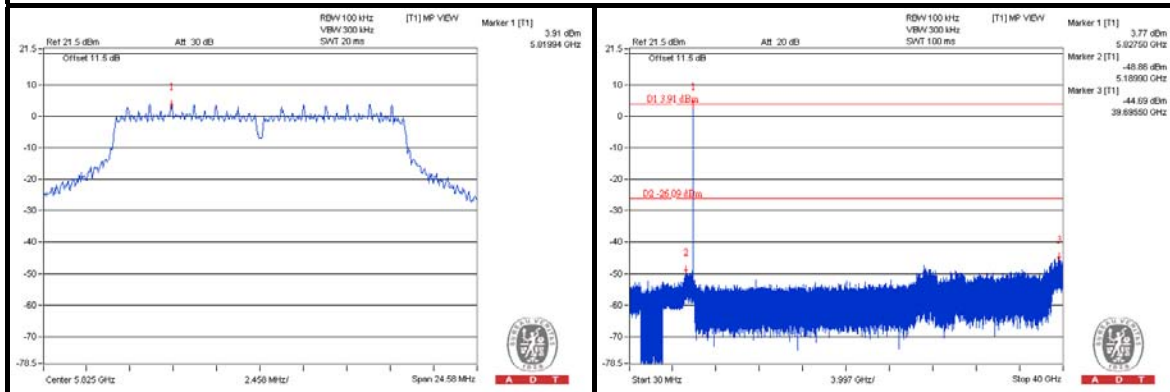

CH 149 Band edge

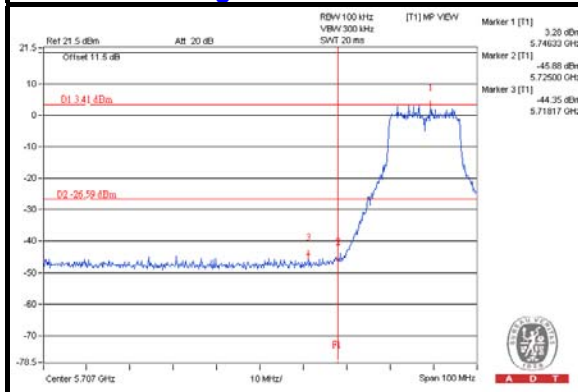

CH 165 Band edge

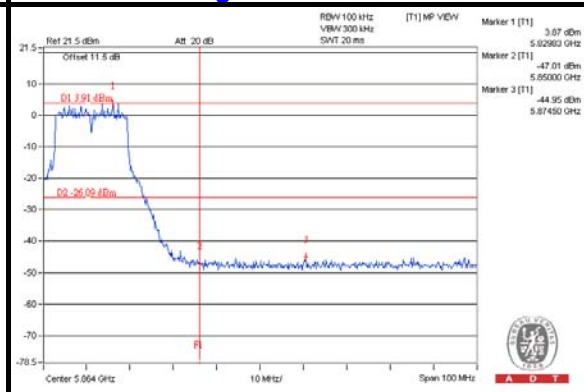





A D T

802.11n (20MHz) CHAIN 0


CH 149

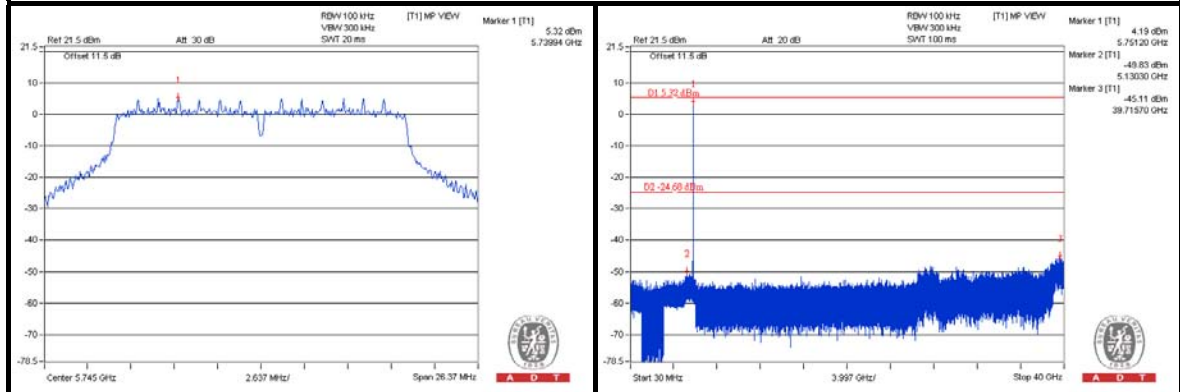


CH 157

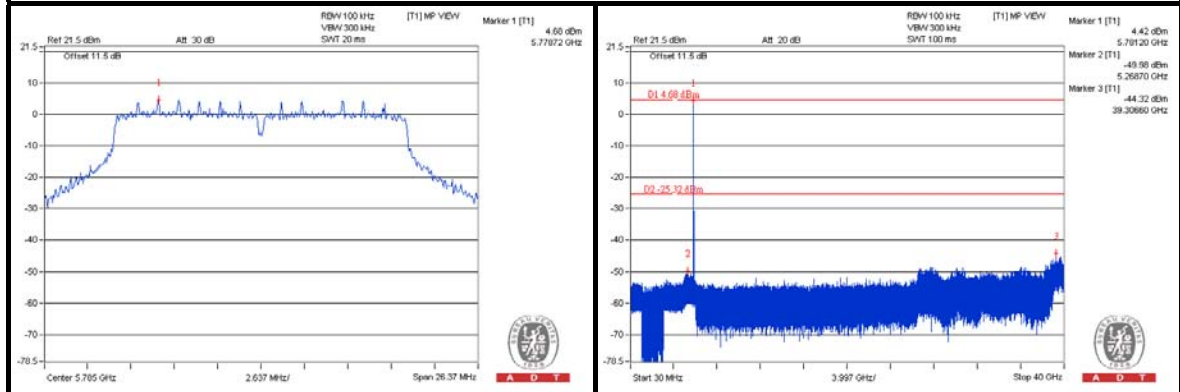


CH 165

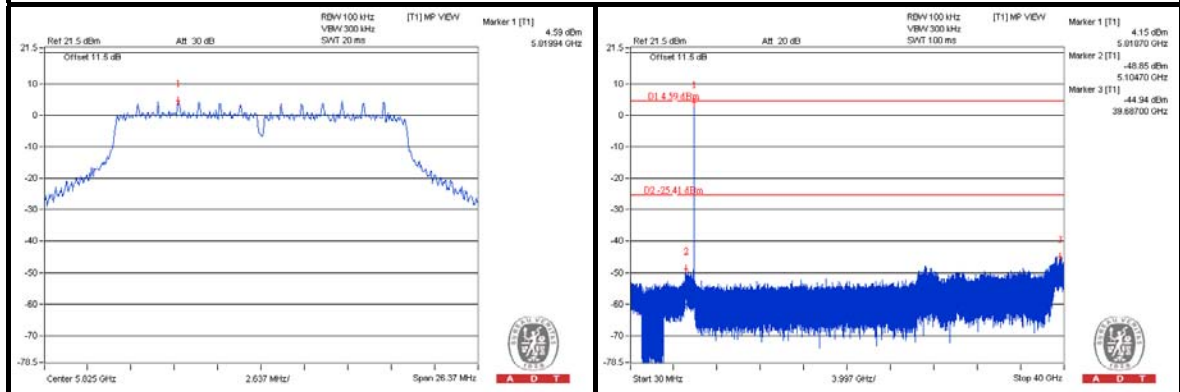

CH 149 Band edge

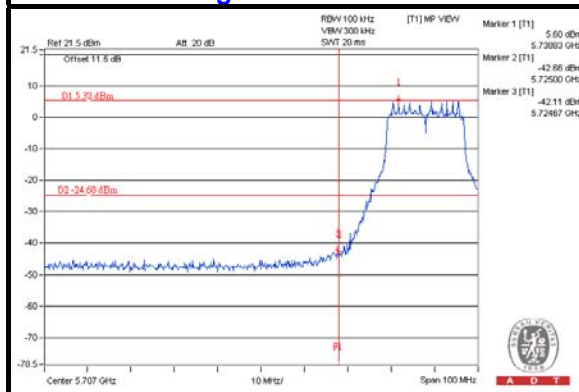

CH 165 Band edge


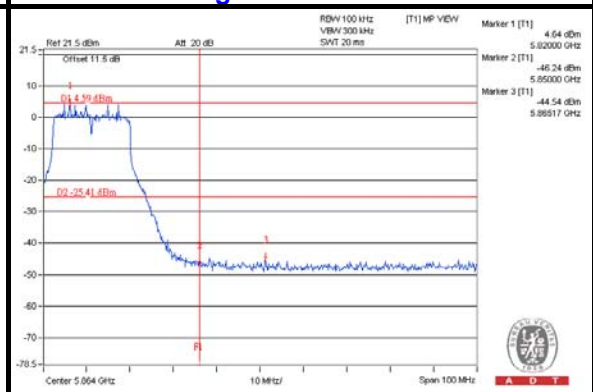






A D T

CHAIN 1



CH 149

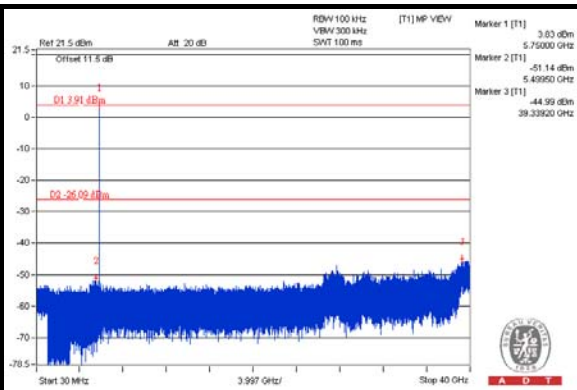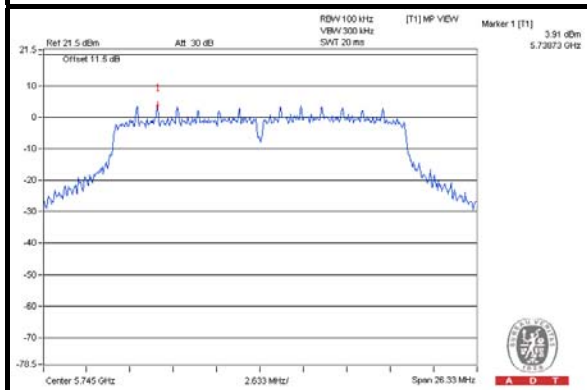


CH 157

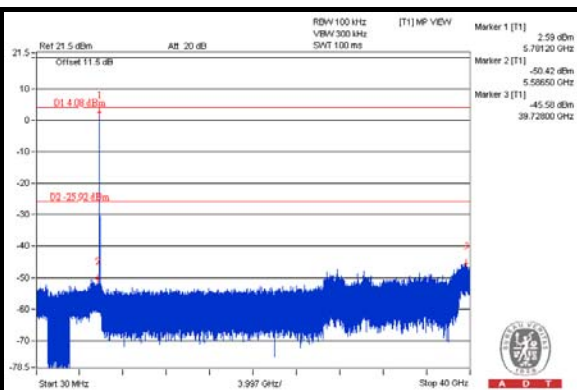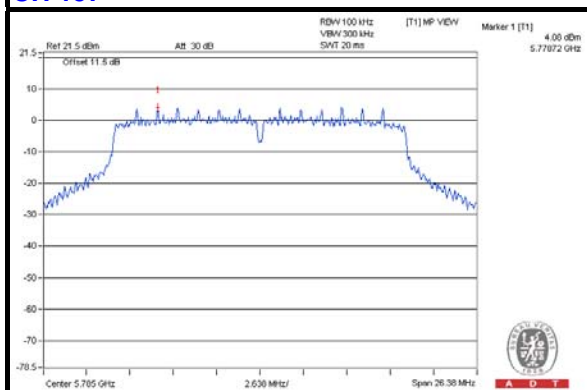


CH 165

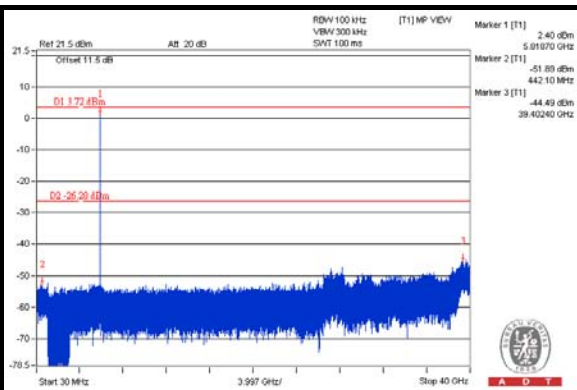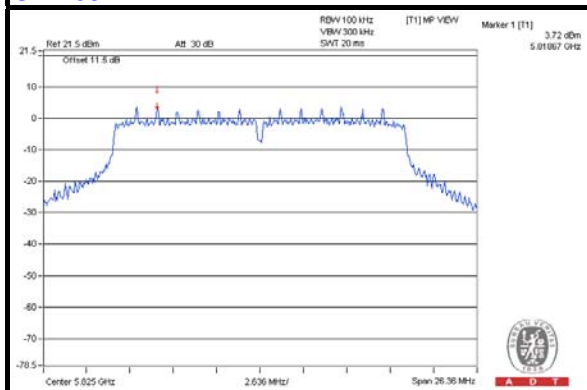

CH 149 Band edge

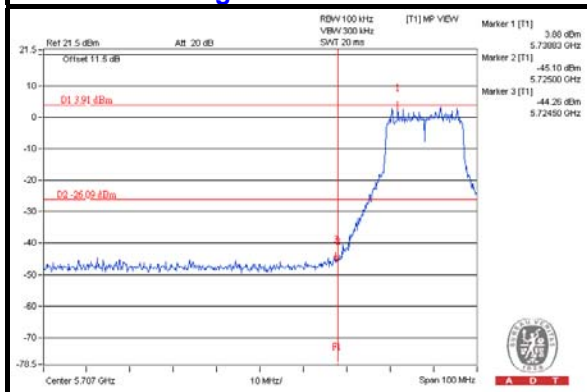

CH 165 Band edge

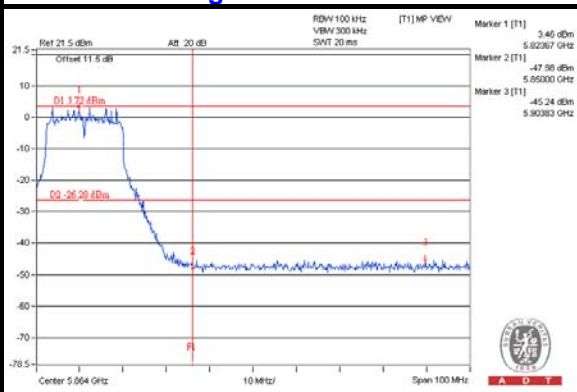





A D T

CHAIN 2


CH 149

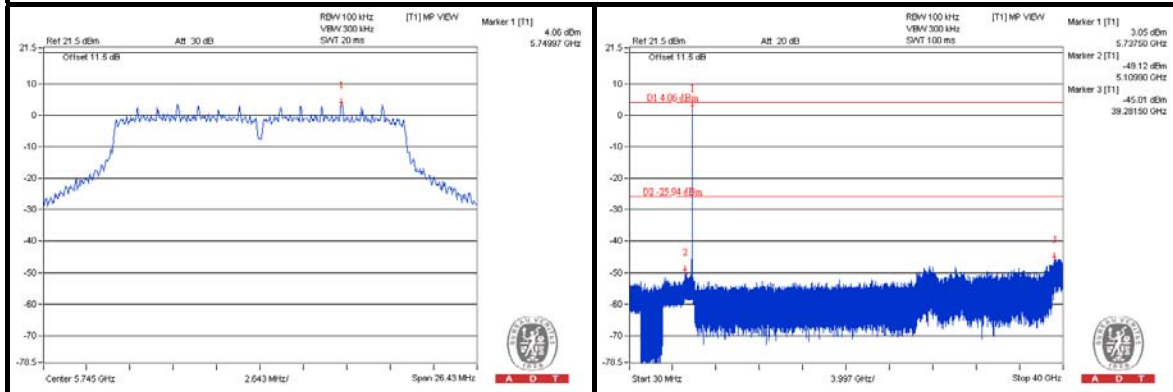


CH 157

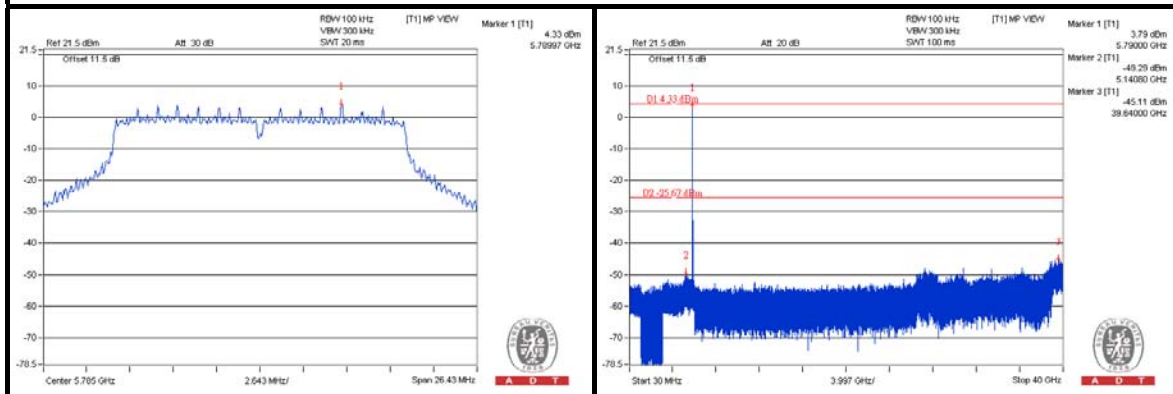


CH 165

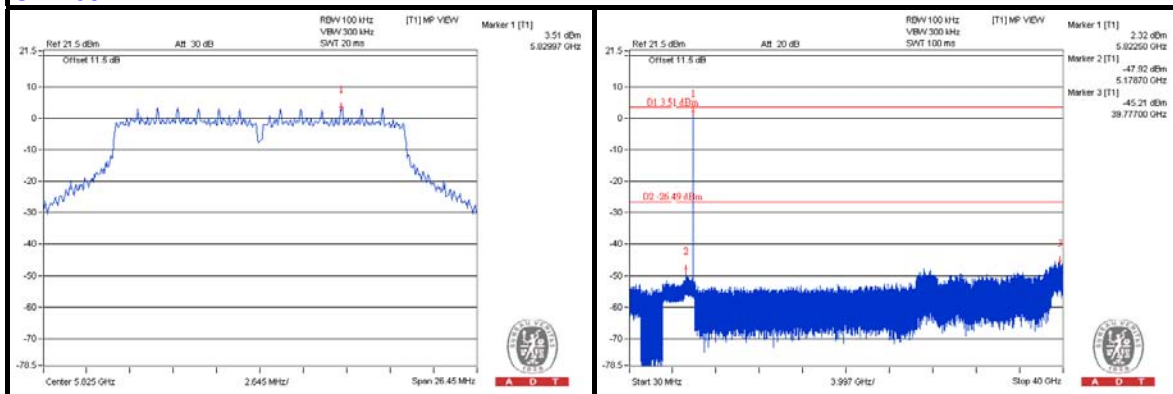

CH 149 Band edge

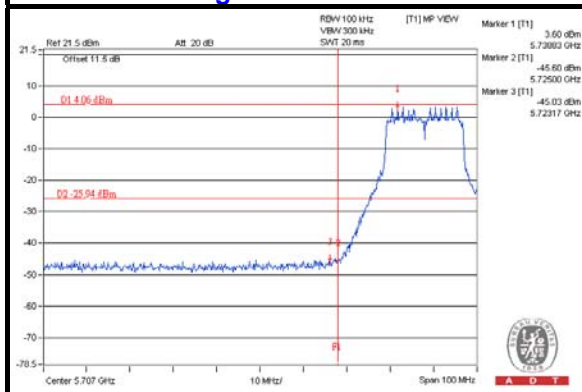

CH 165 Band edge


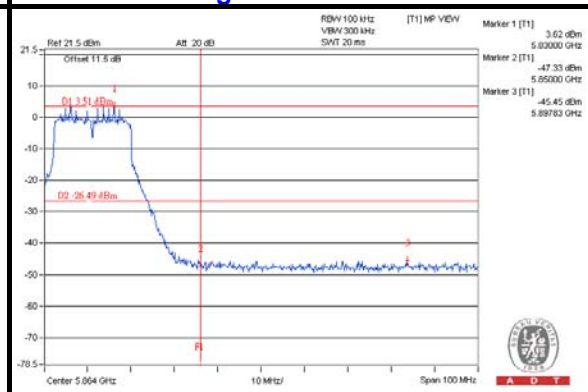






A D T

802.11n (40MHz) CHAIN 0


CH 151

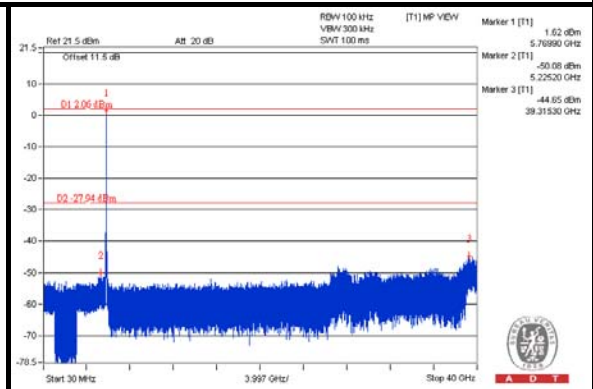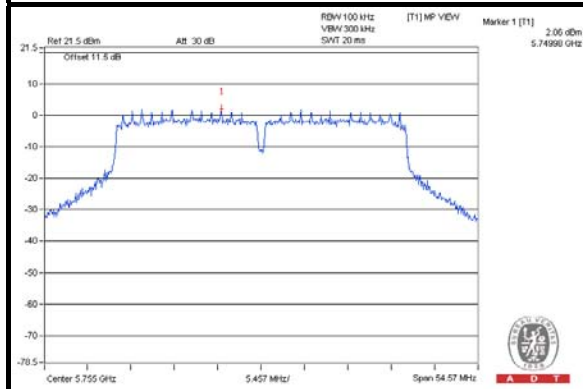


CH 159

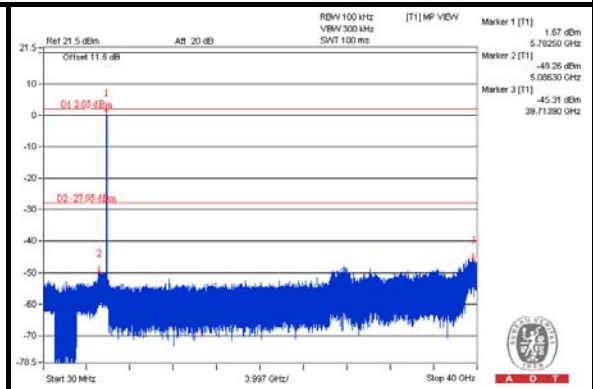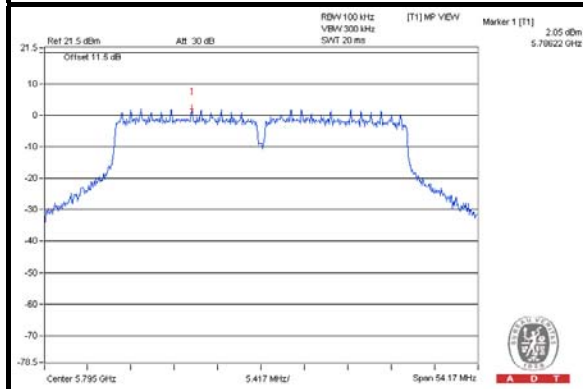

CH 151 Band edge

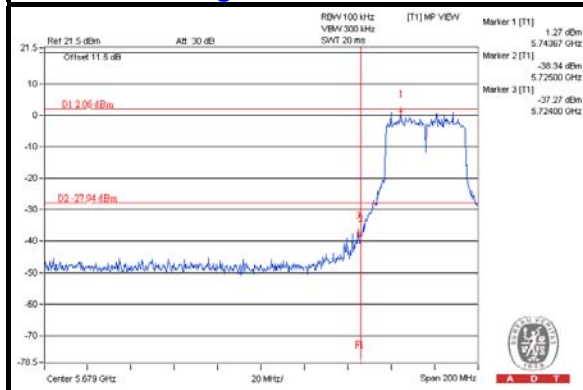

CH 159 Band edge


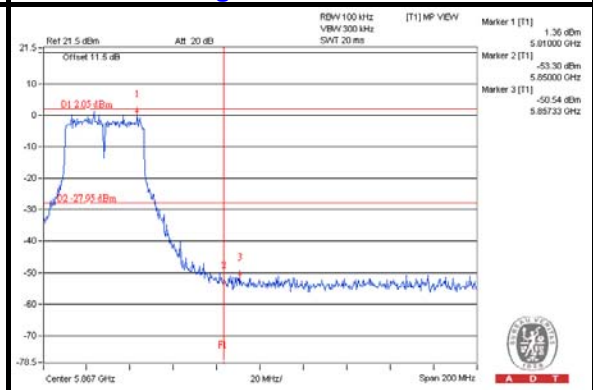






A D T

CHAIN 1


CH 151

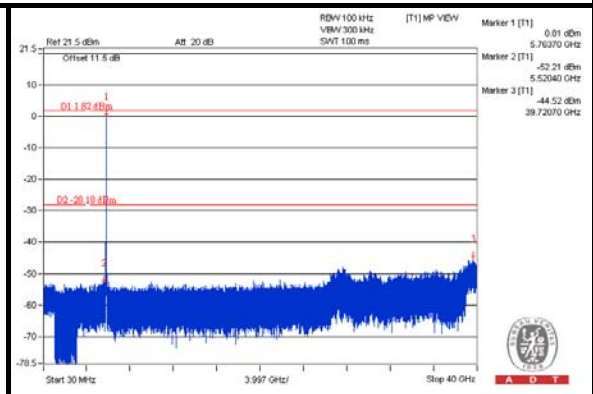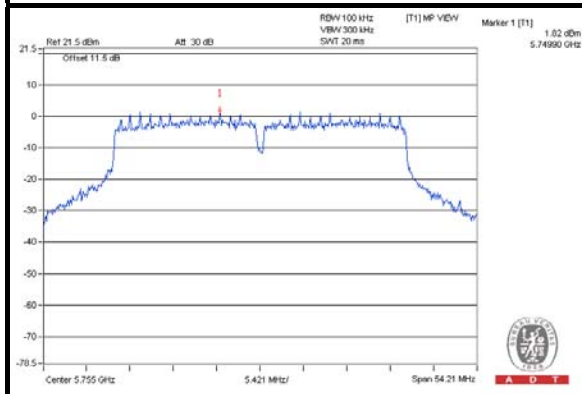


CH 159

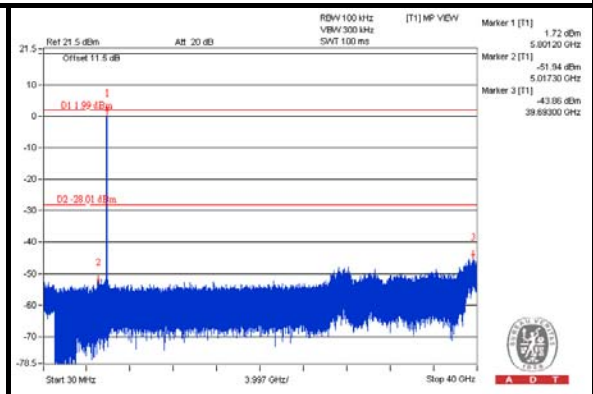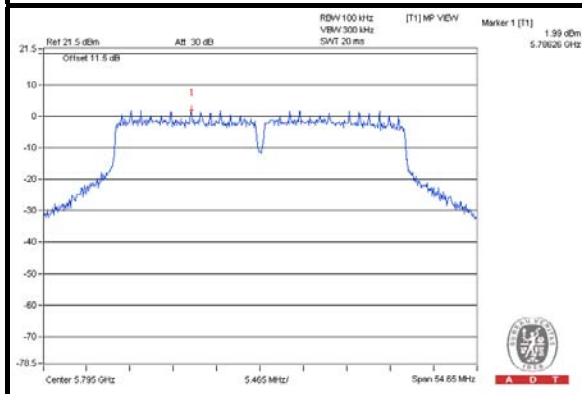

CH 151 Band edge

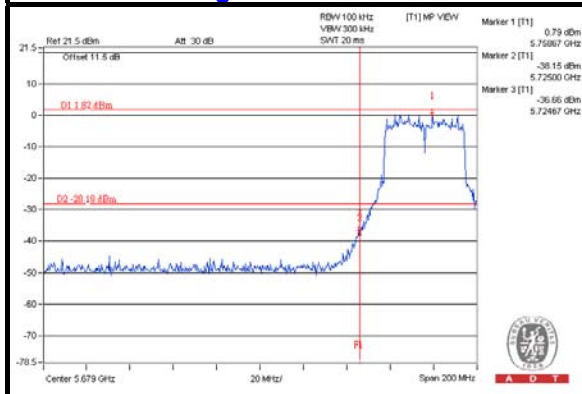

CH 159 Band edge


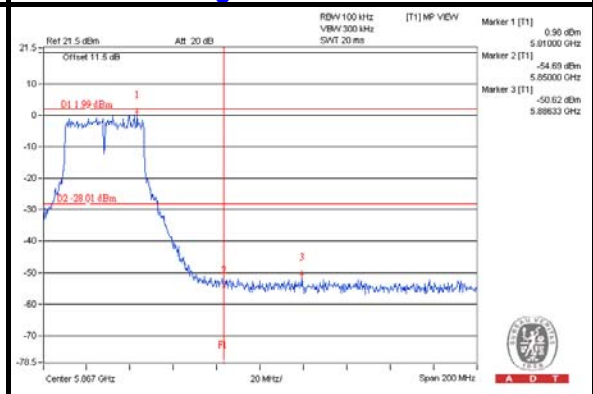






A D T

CHAIN 2


CH 151

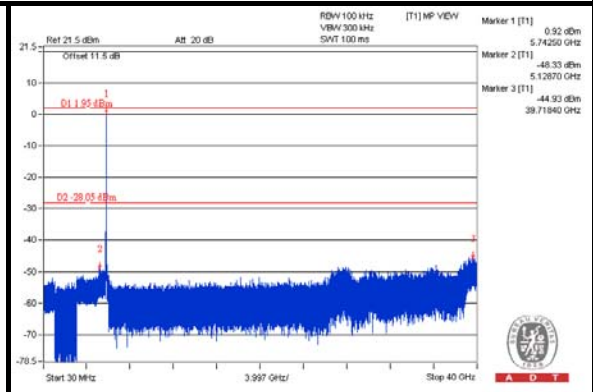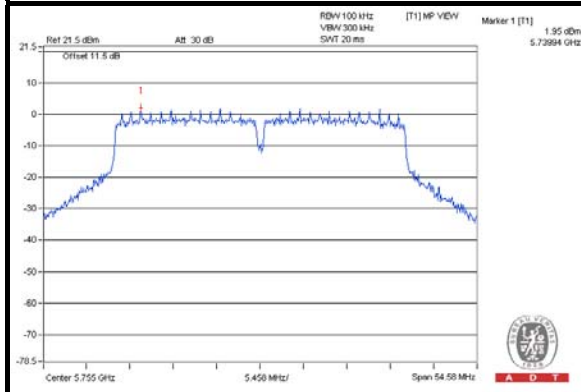


CH 159

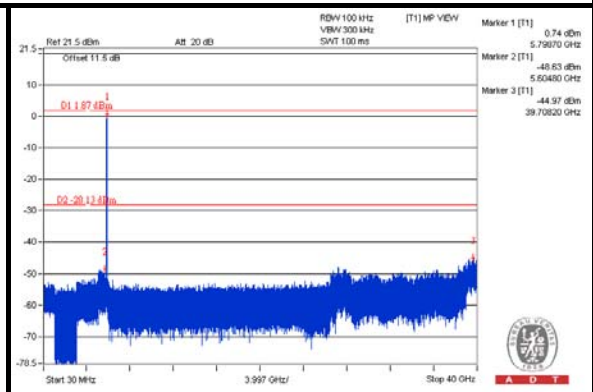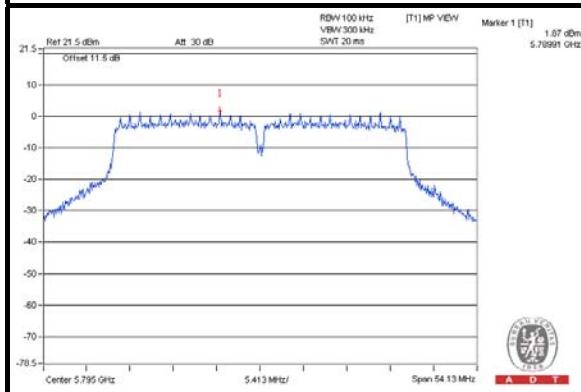

CH 151 Band edge

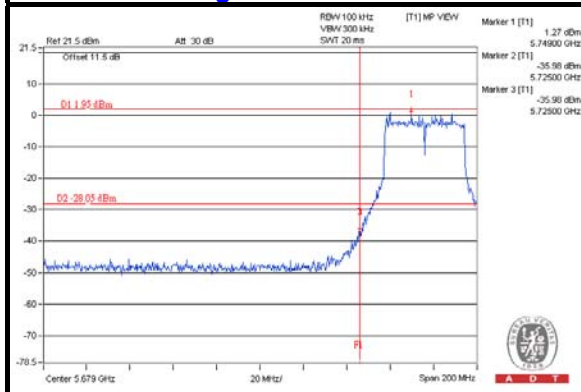

CH 159 Band edge


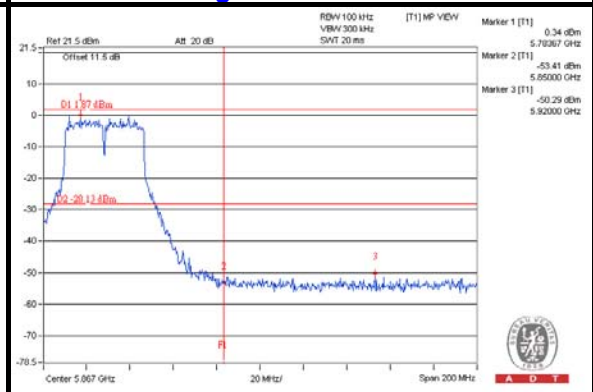





A D T

802.11ac (80MHz) CHAIN 0


CH 155

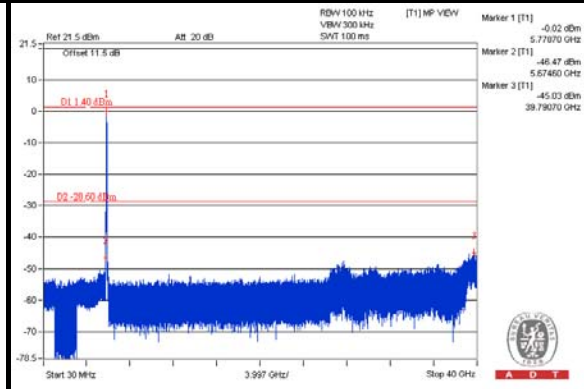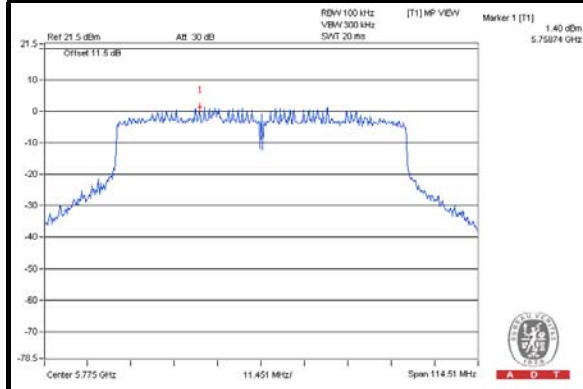

CH 155 Band edge

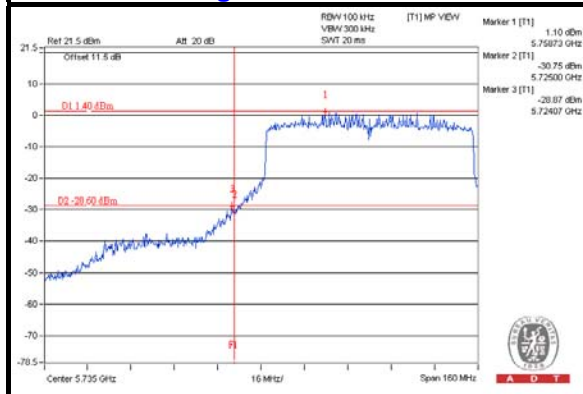

CH 155 Band edge


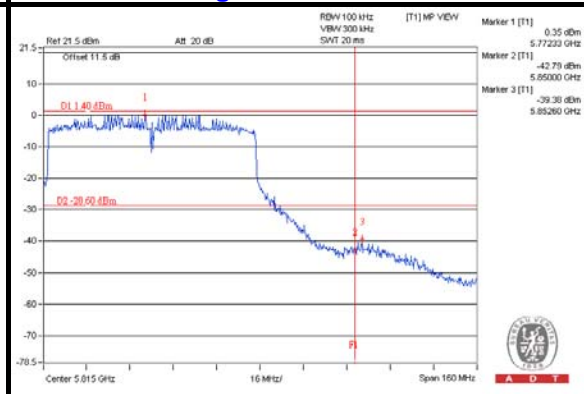





A D T

CHAIN 1


CH 155

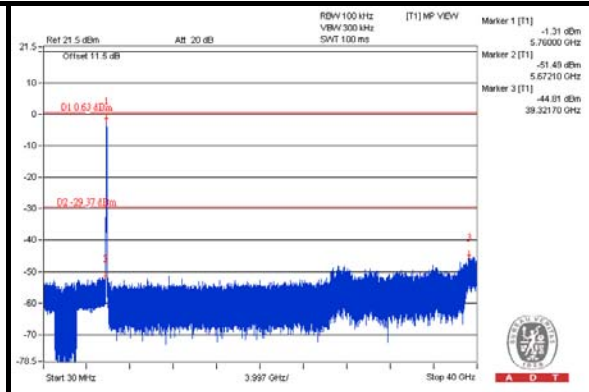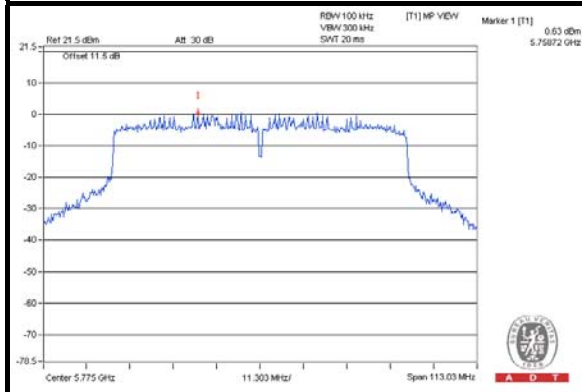

CH 155 Band edge

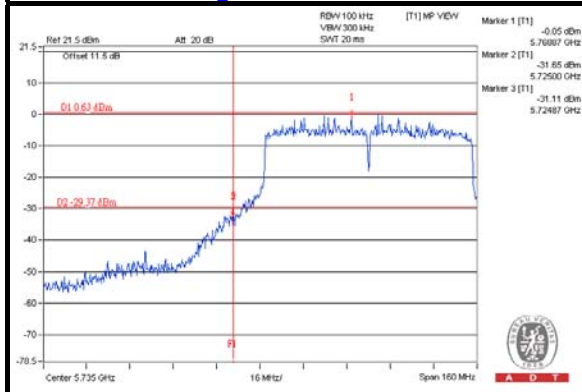

CH 155 Band edge


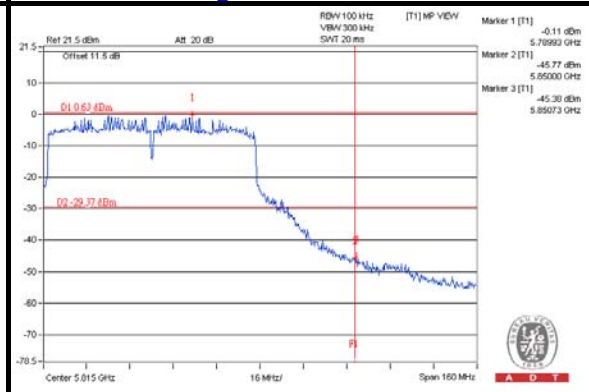





A D T

CHAIN 2


CH 155

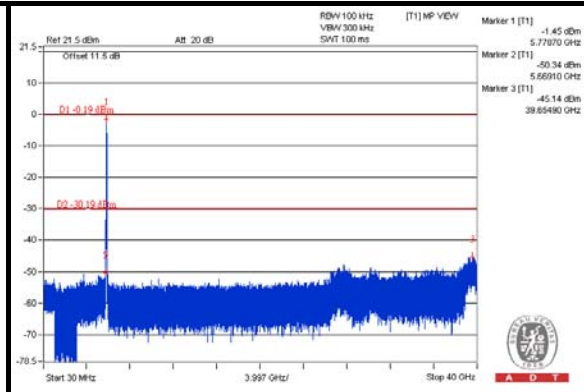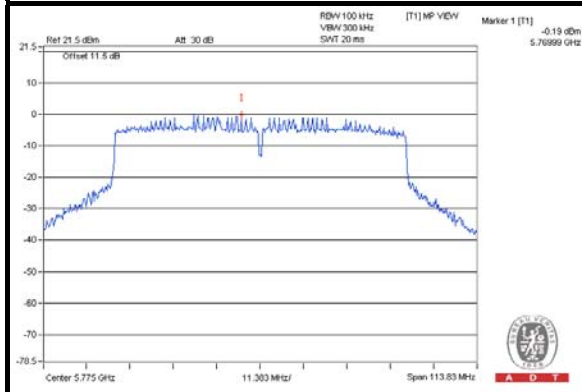

CH 155 Band edge

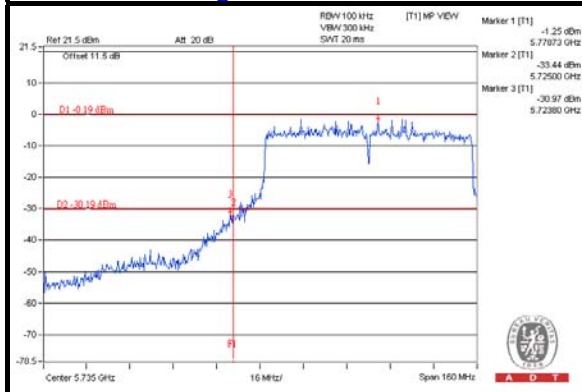

CH 155 Band edge

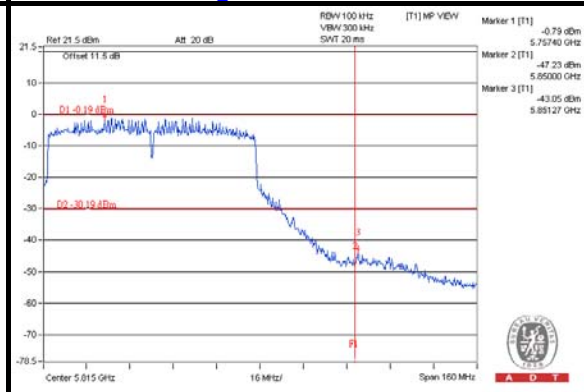



A D T

6. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



A D T

7. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.



A D T

8. APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

---END---