


Test Mode: IEEE 802.11g

Test CH1: 2412MHz



Test CH6: 2437MHz

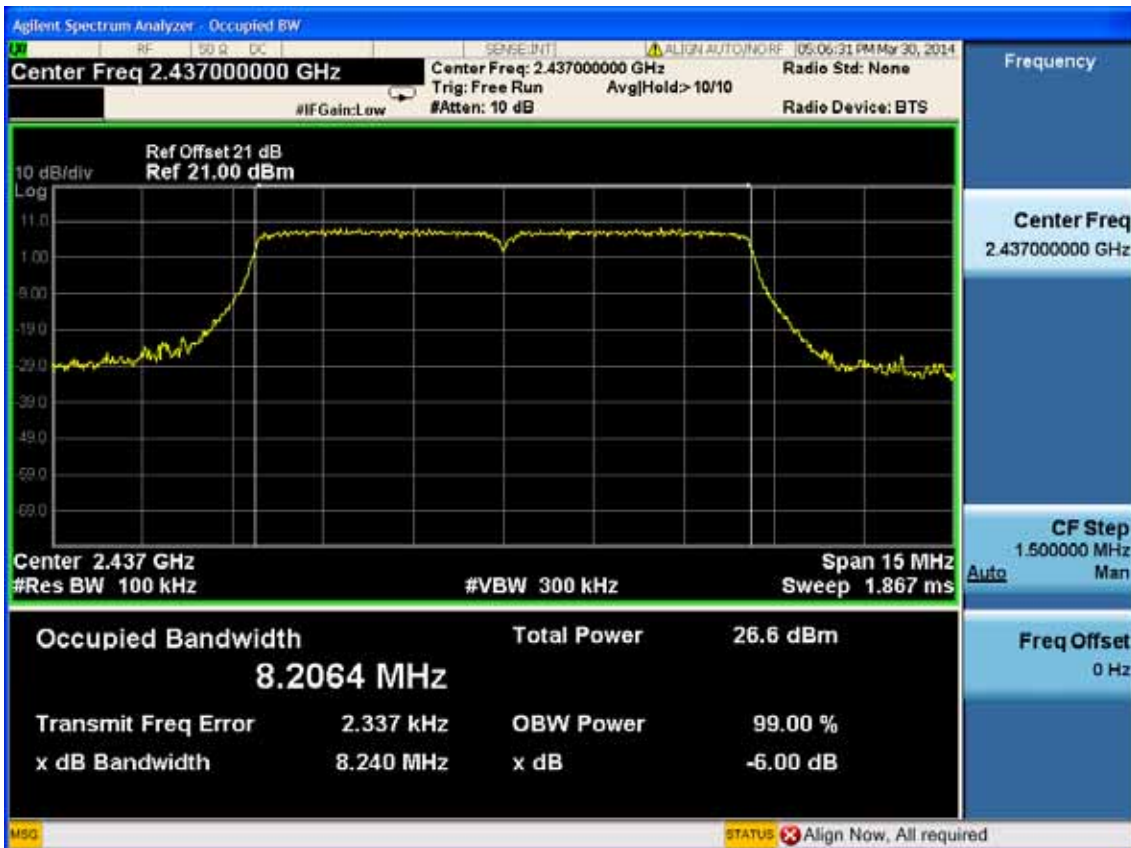

Test CH11: 2462MHz



Test Mode: IEEE 802.11n HT20

Test CH1: 2412MHz




Test CH6: 2437MHz




Test CH11: 2462MHz




20MHz Antenna: J2
 Test Mode: IEEE 802.11b
 Test CH1: 2412MHz

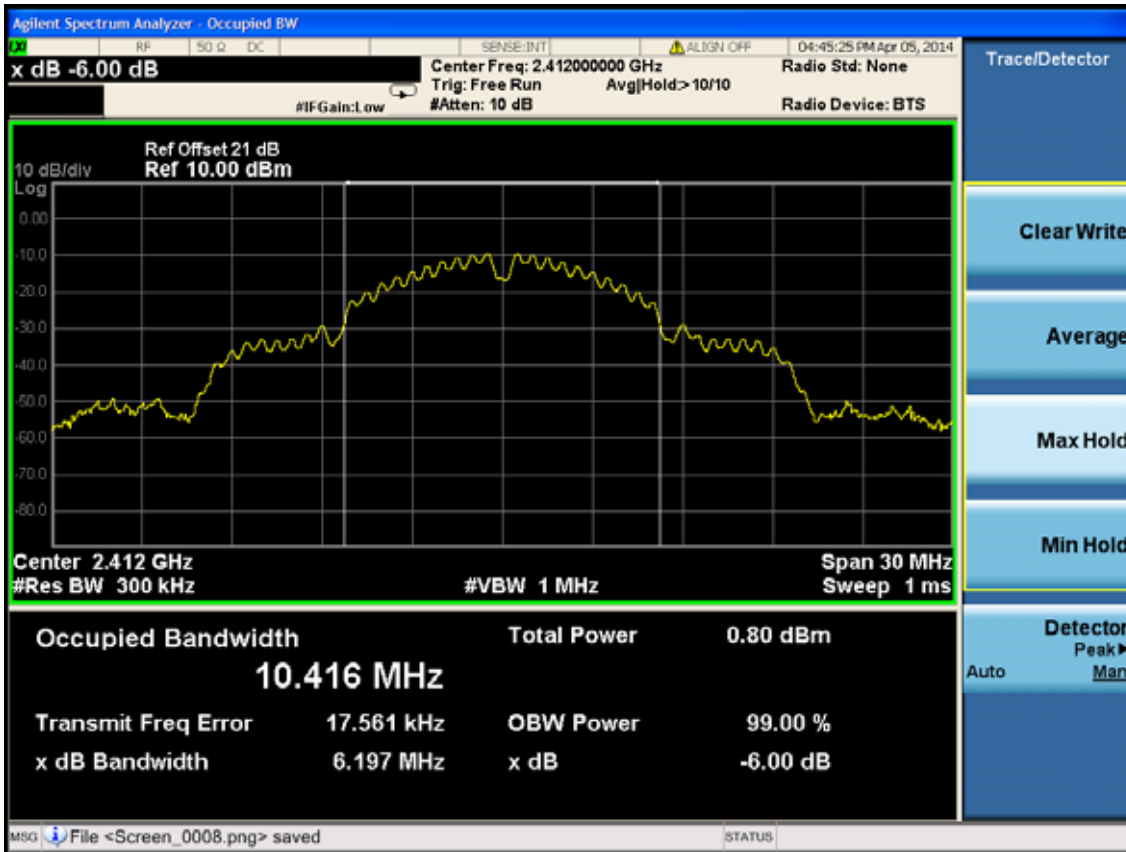

Test CH6: 2437MHz

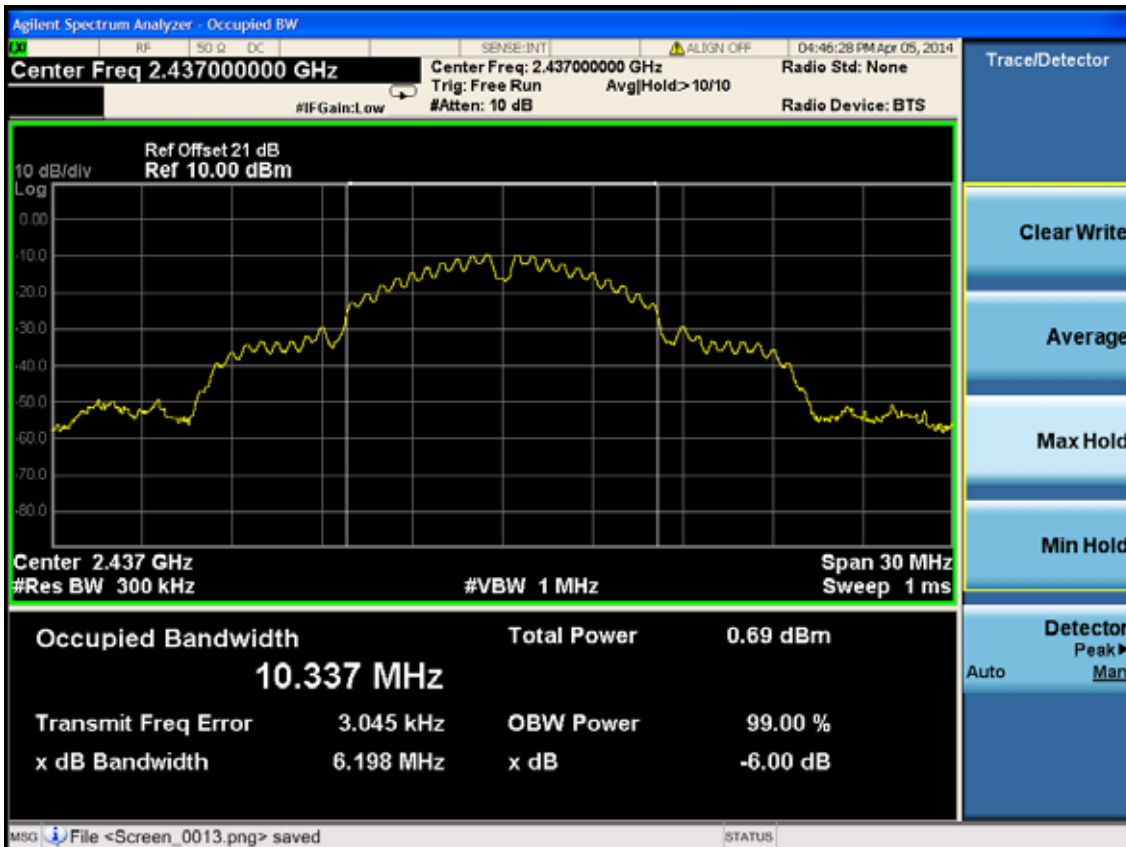


Test CH11: 2462MHz

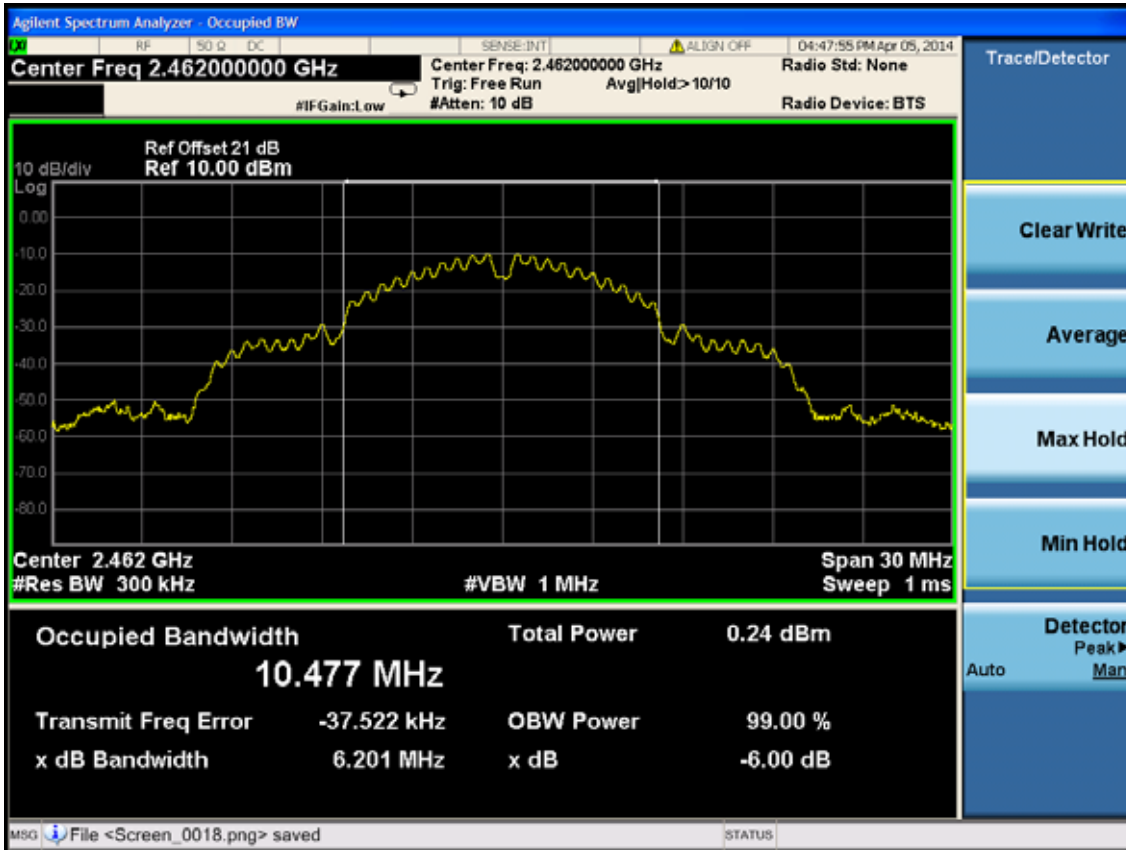


Test Mode: IEEE 802.11g


Test CH1: 2412MHz

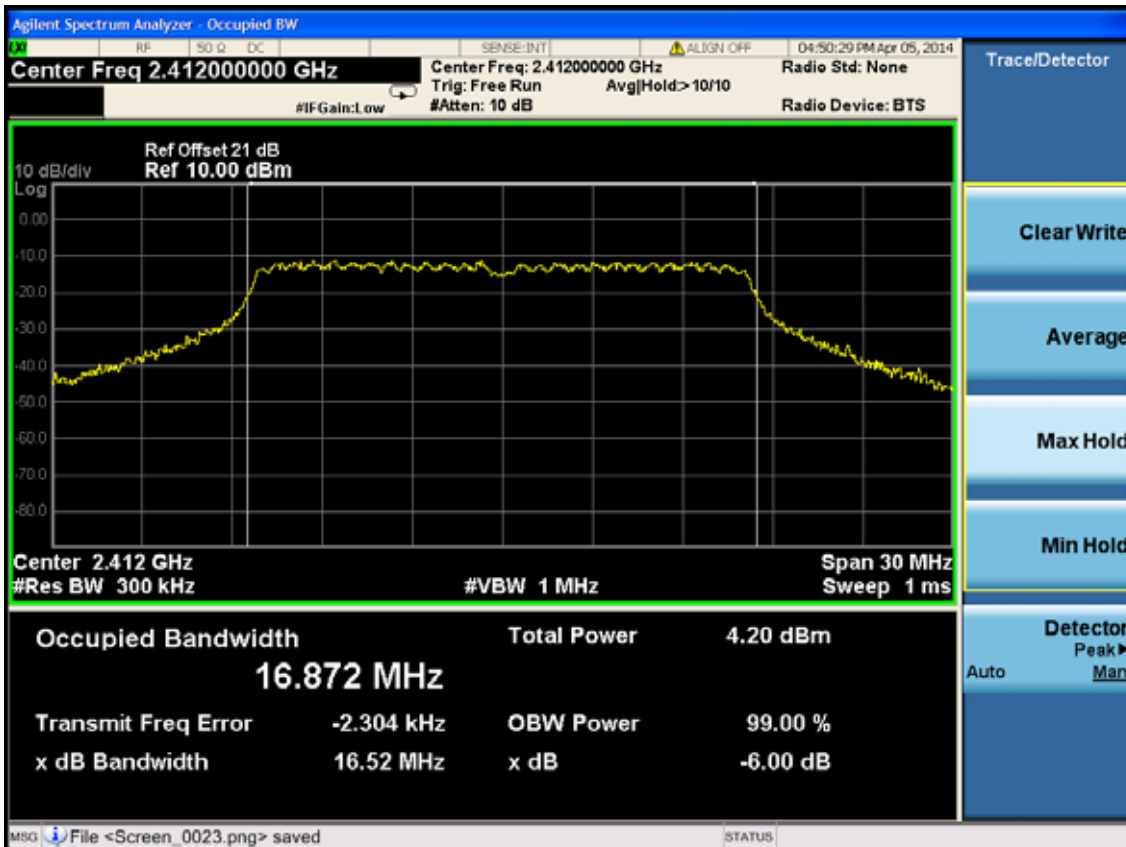

Test CH6: 2437MHz

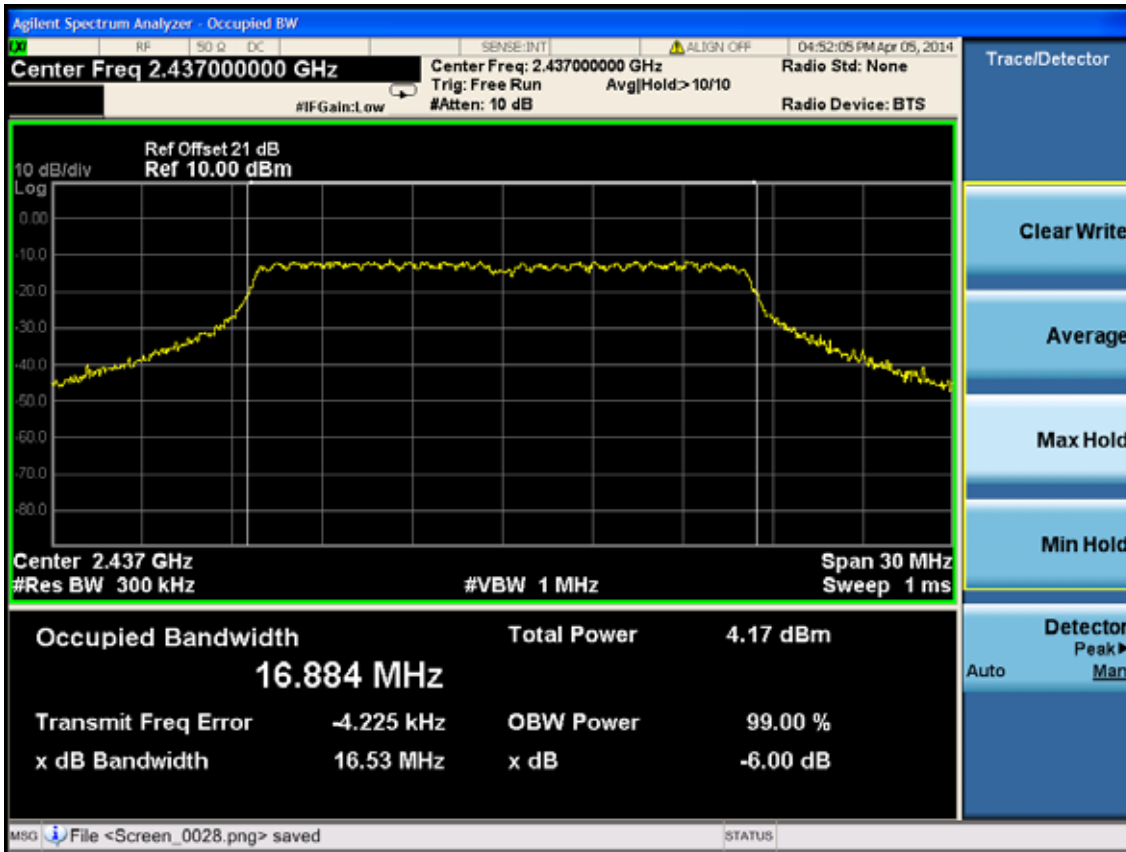


Test CH11: 2462MHz

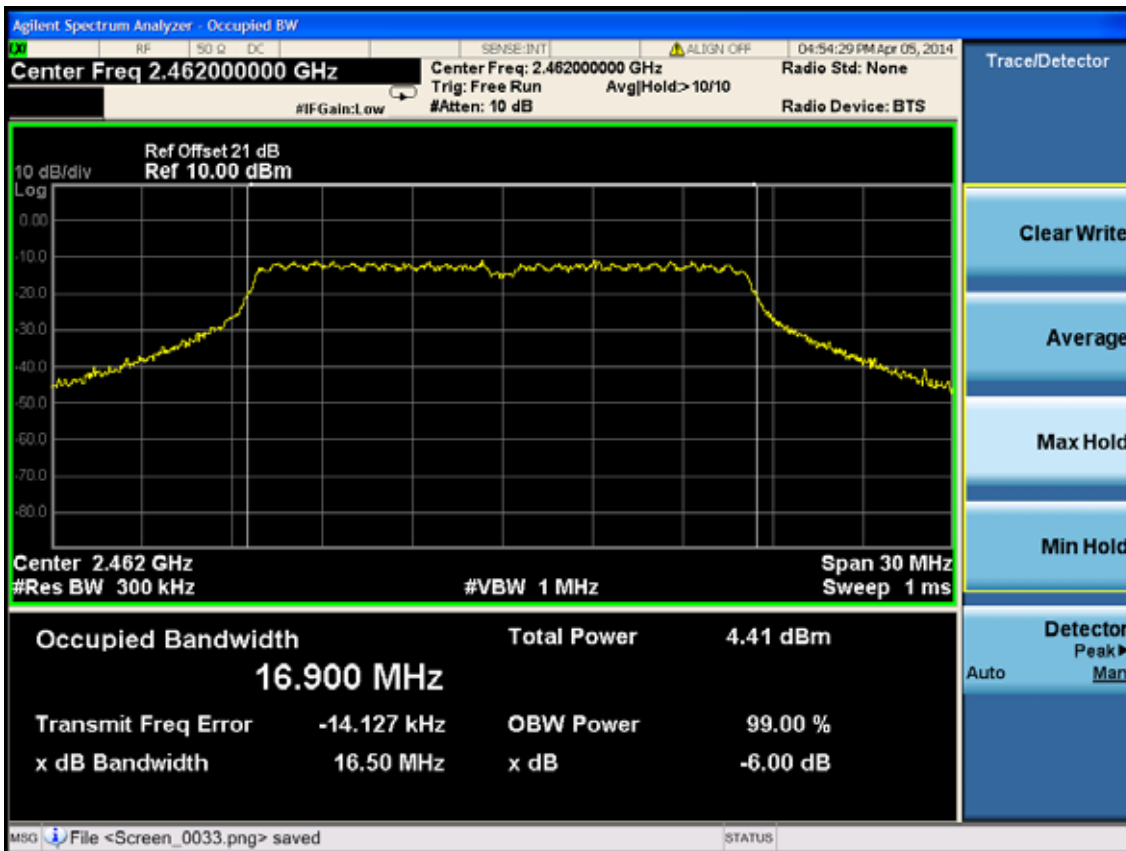


Test Mode: IEEE 802.11n HT20


Test CH1: 2412MHz

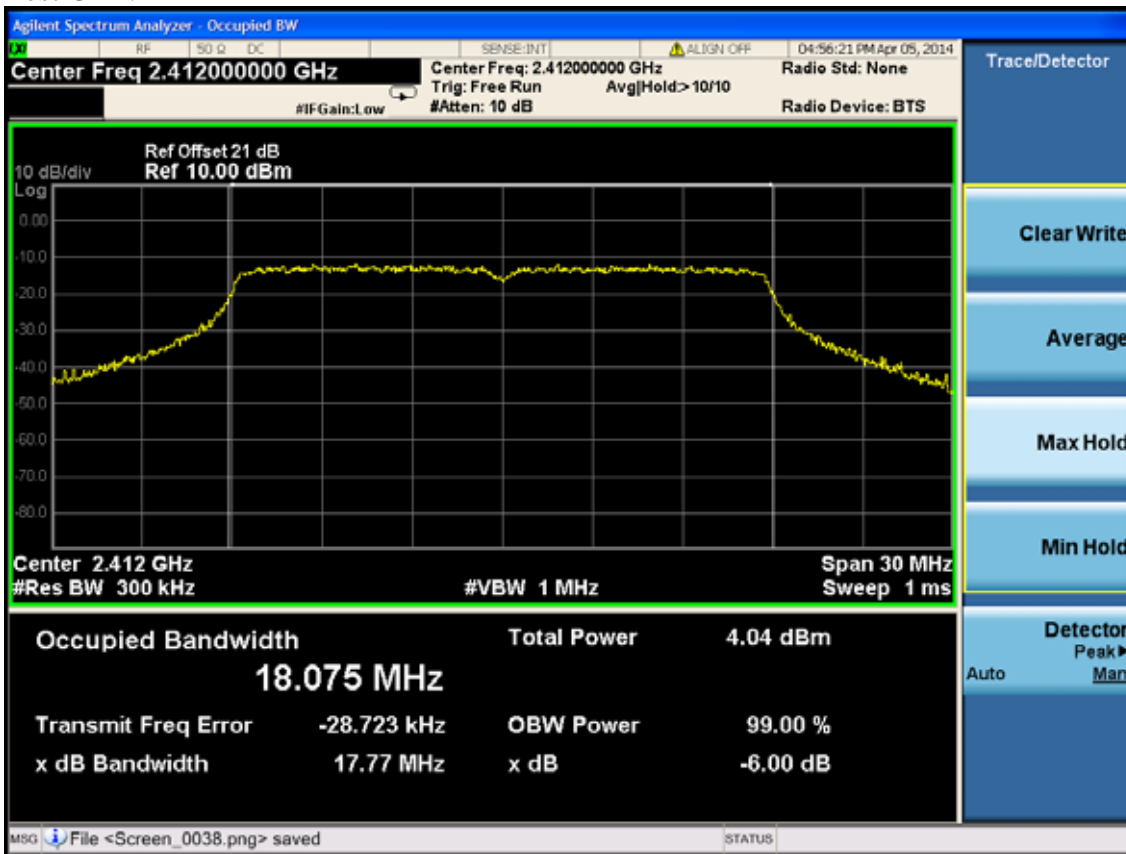

Test CH6: 2437MHz

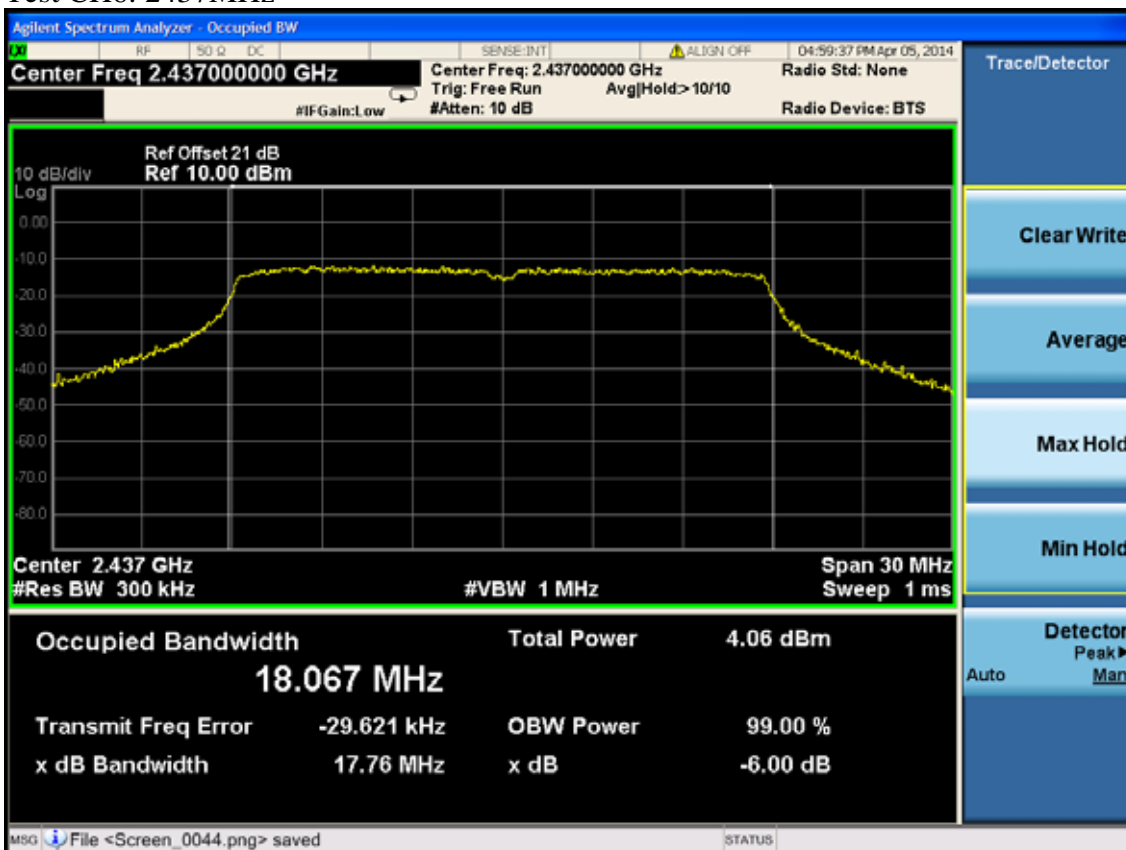


Test CH11: 2462MHz

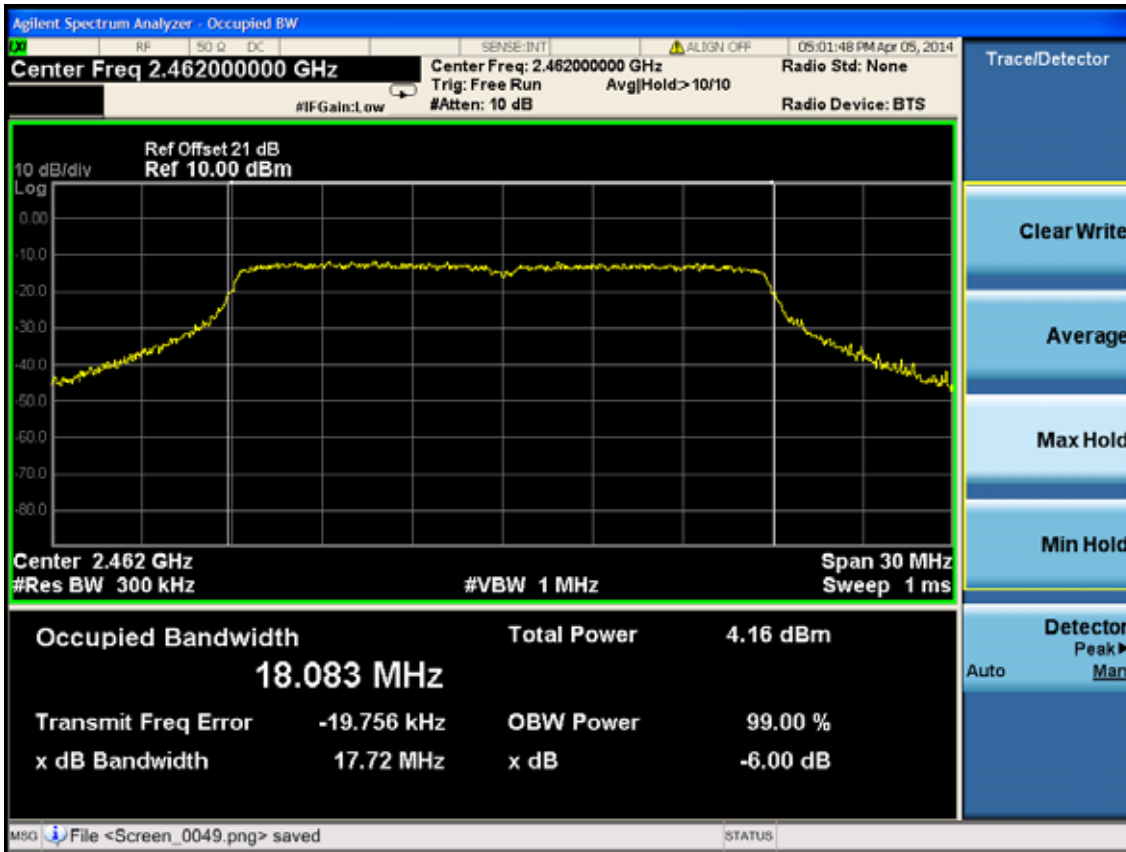


20MHz Antenna: J3

Test Mode: IEEE 802.11b


Test CH1: 2412MHz

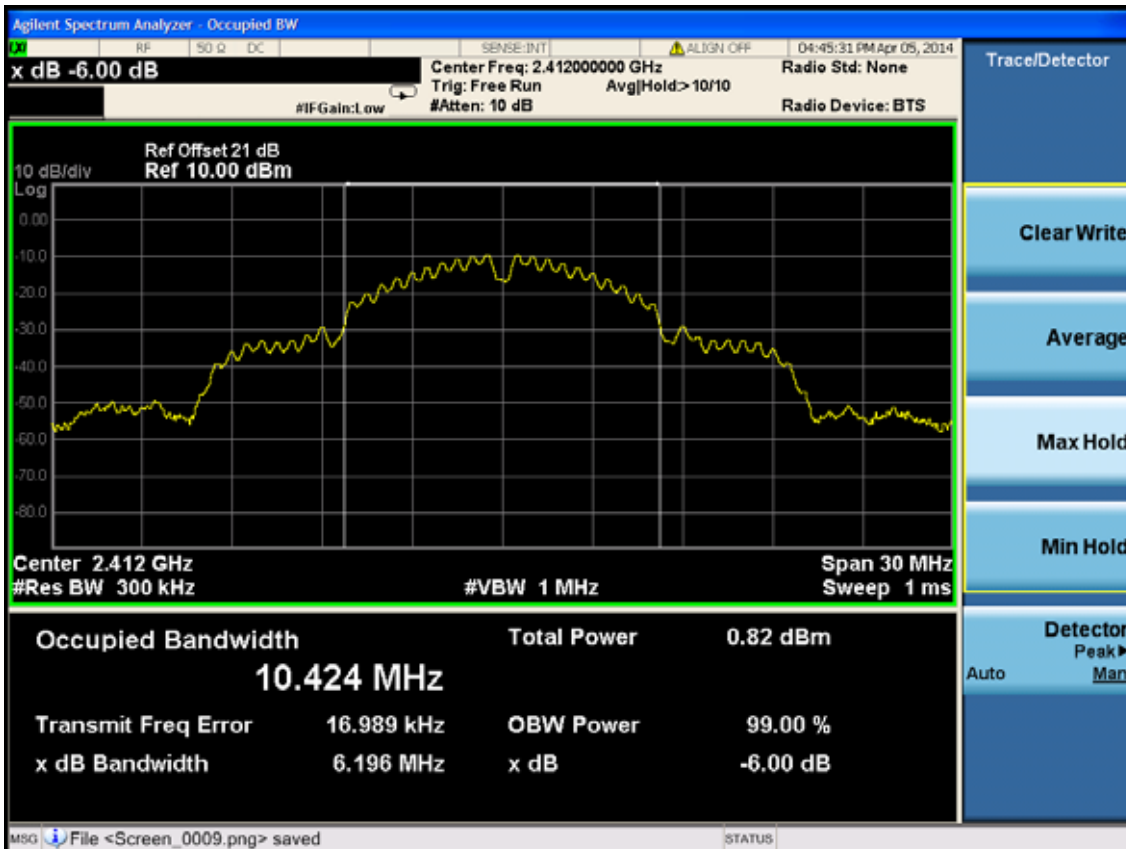

Test CH6: 2437MHz

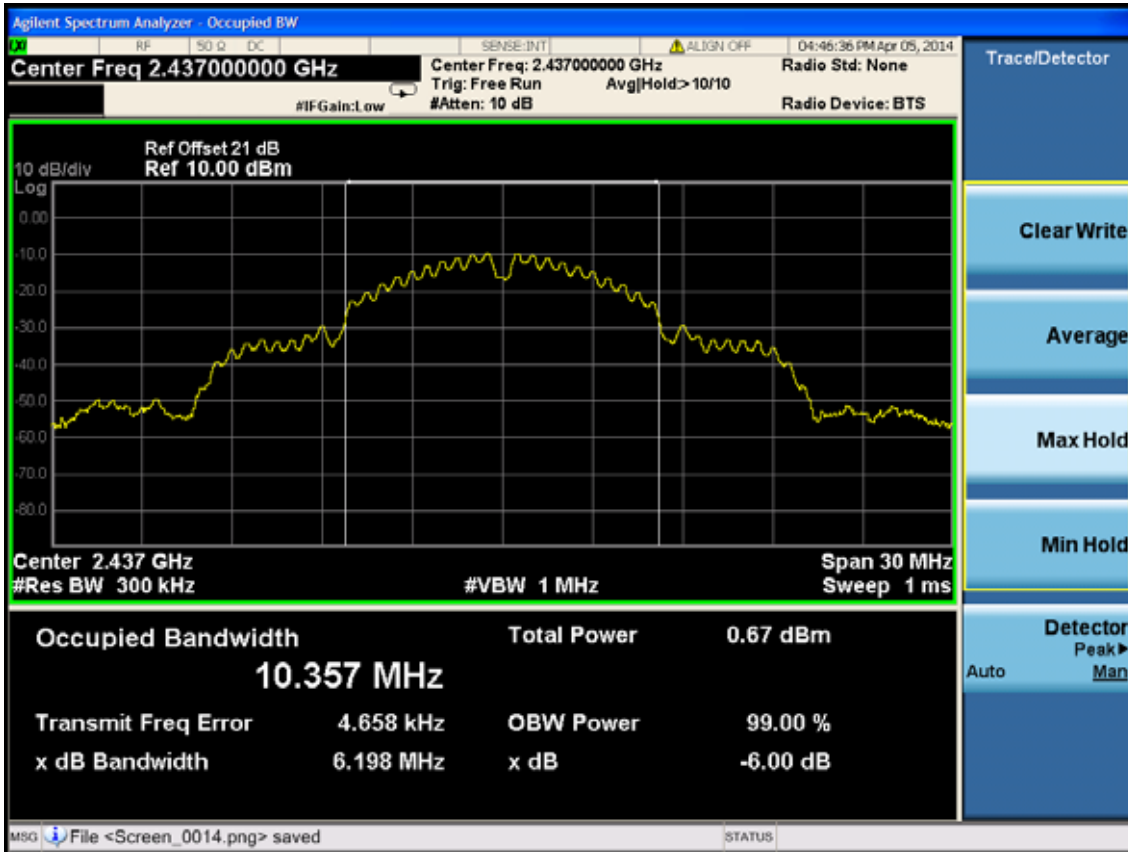


Test CH11: 2462MHz

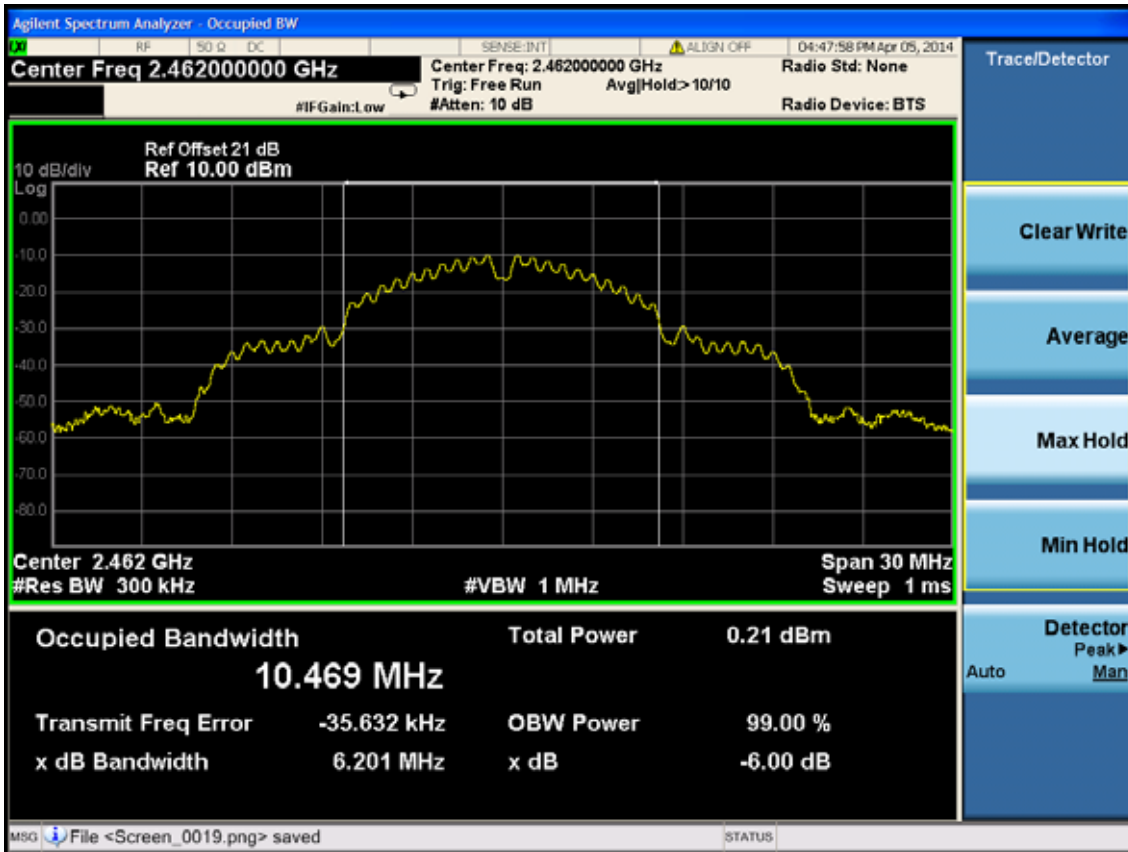


Test Mode: IEEE 802.11g


Test CH1: 2412MHz

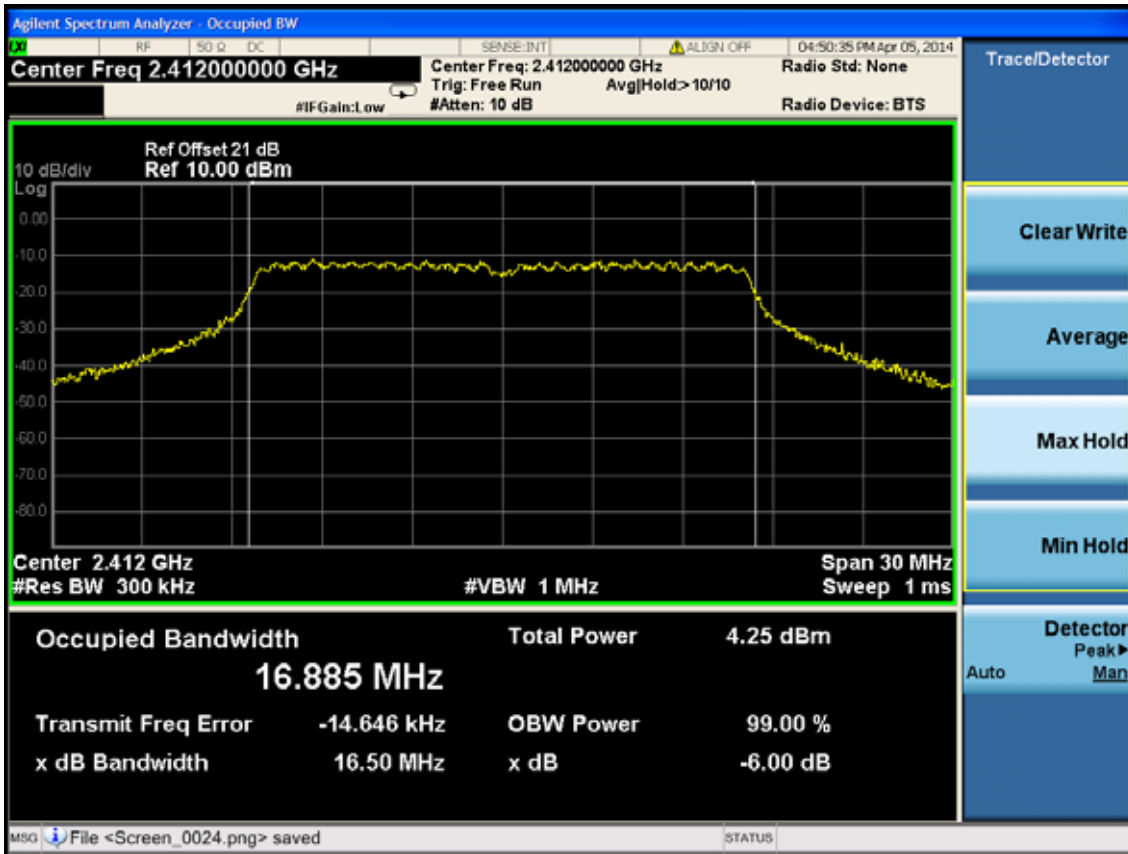

Test CH6: 2437MHz

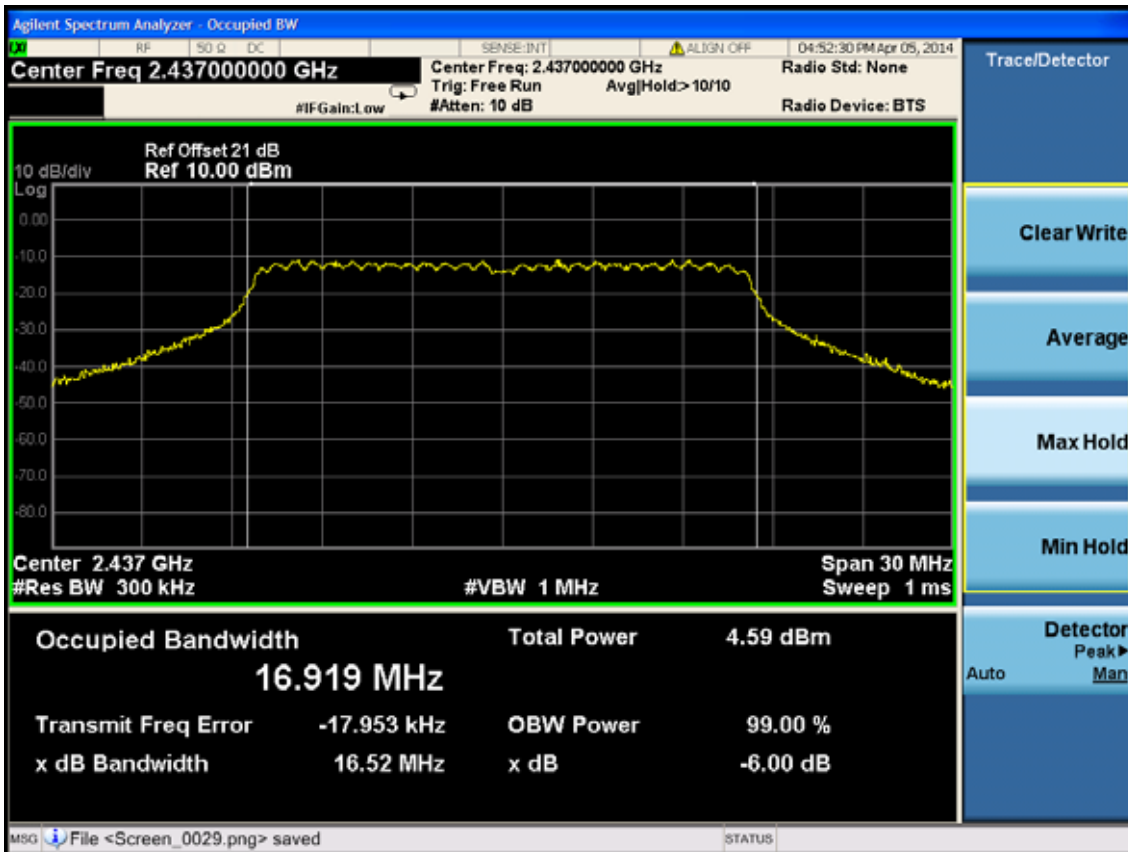


Test CH11: 2462MHz

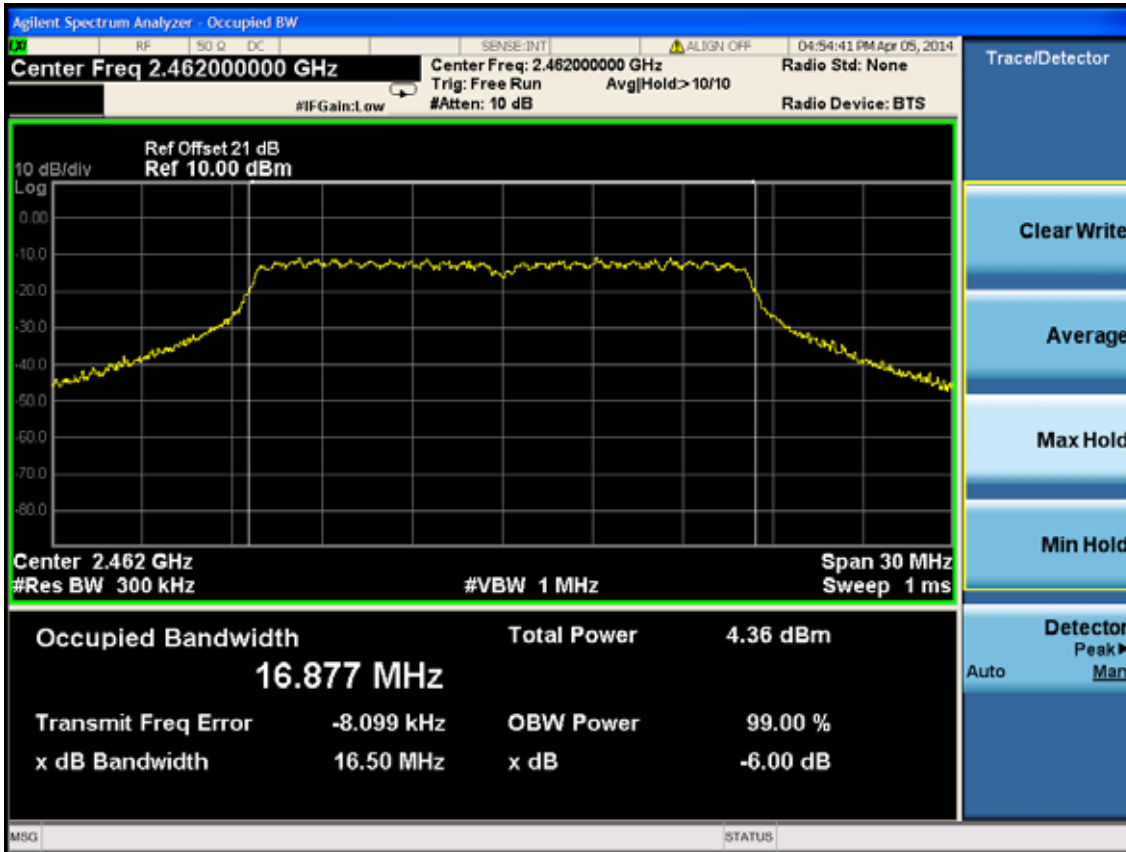


Test Mode: IEEE 802.11n HT20


Test CH1: 2412MHz

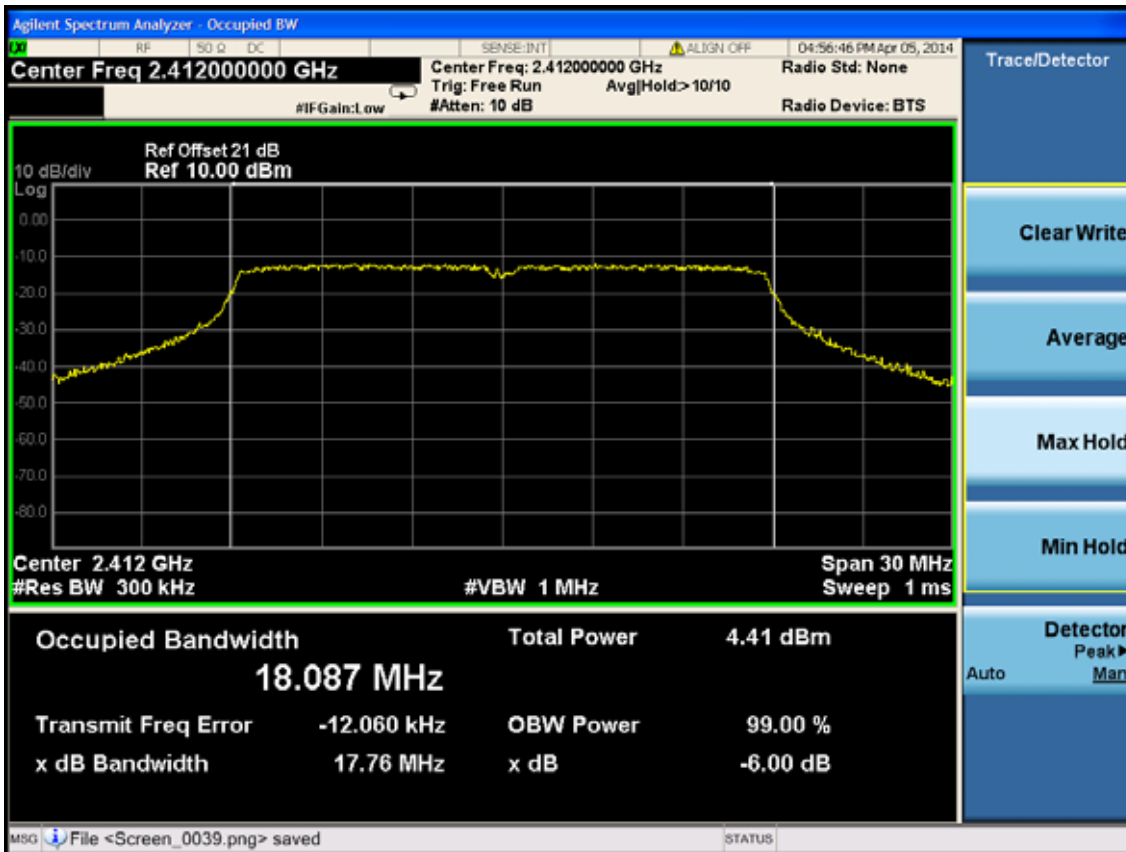


Test CH6: 2437MHz

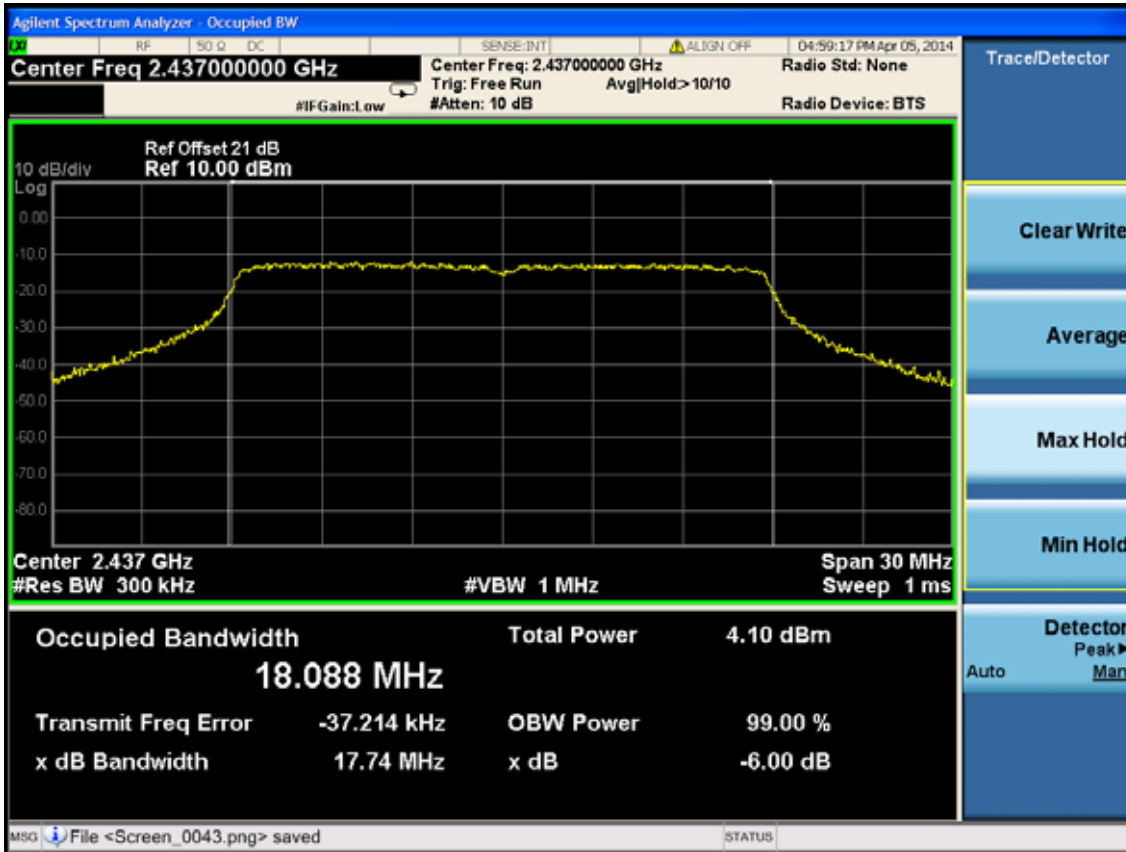


Test CH11: 2462MHz

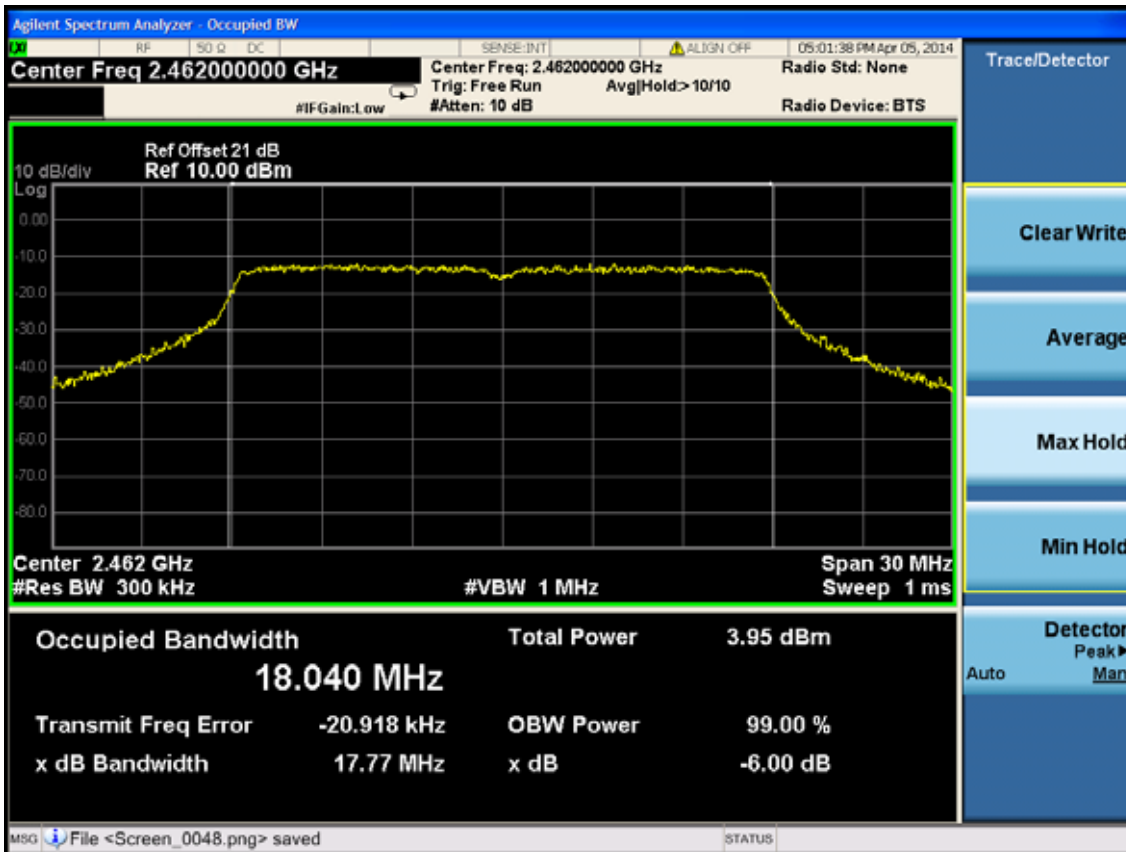


40MHz Antenna: J2
 Test Mode: IEEE 802.11n HT40
 Test CH1: 2422MHz

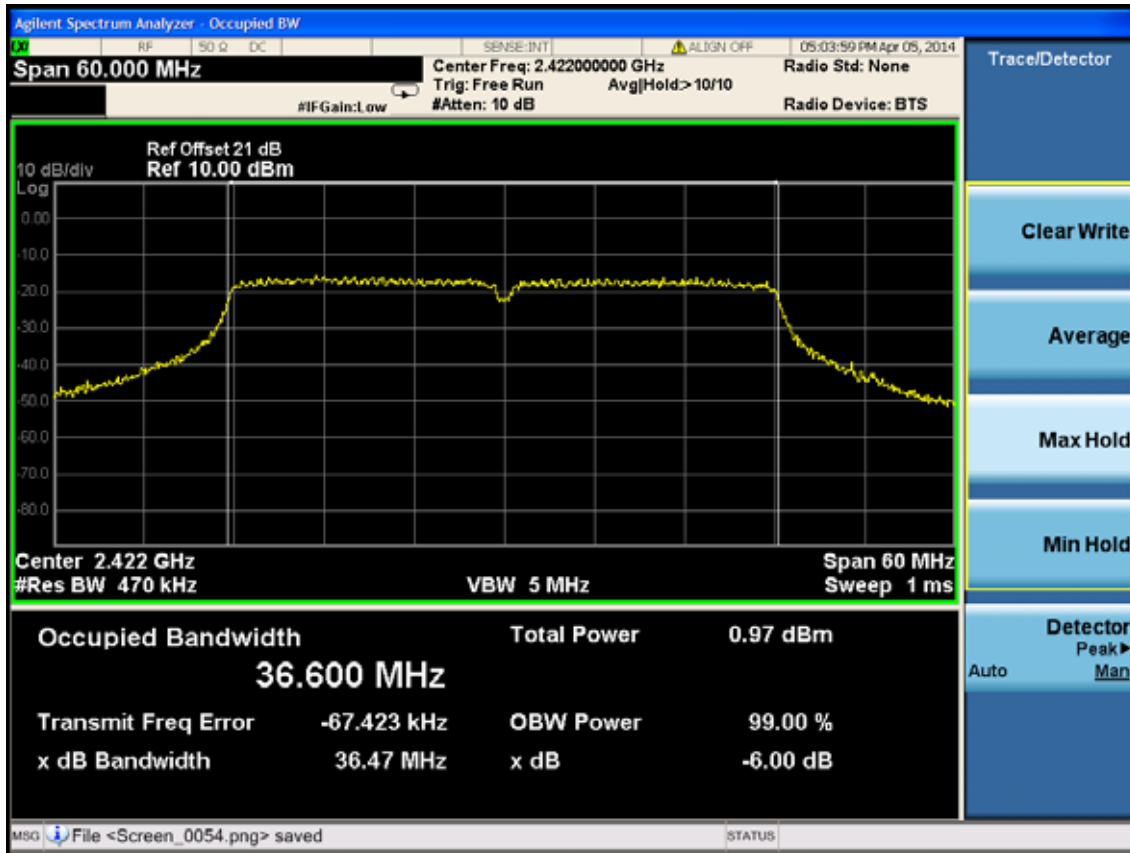

Test CH4: 2437MHz

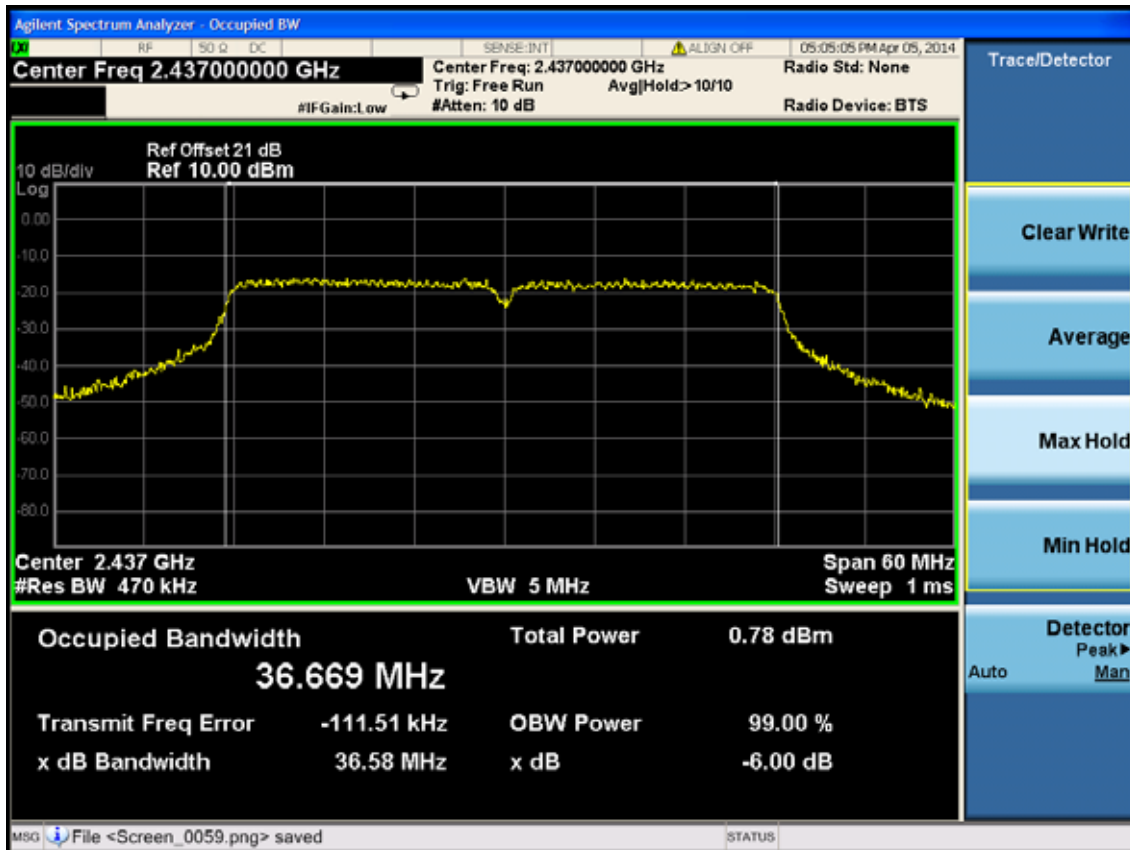


Test CH7: 2452MHz

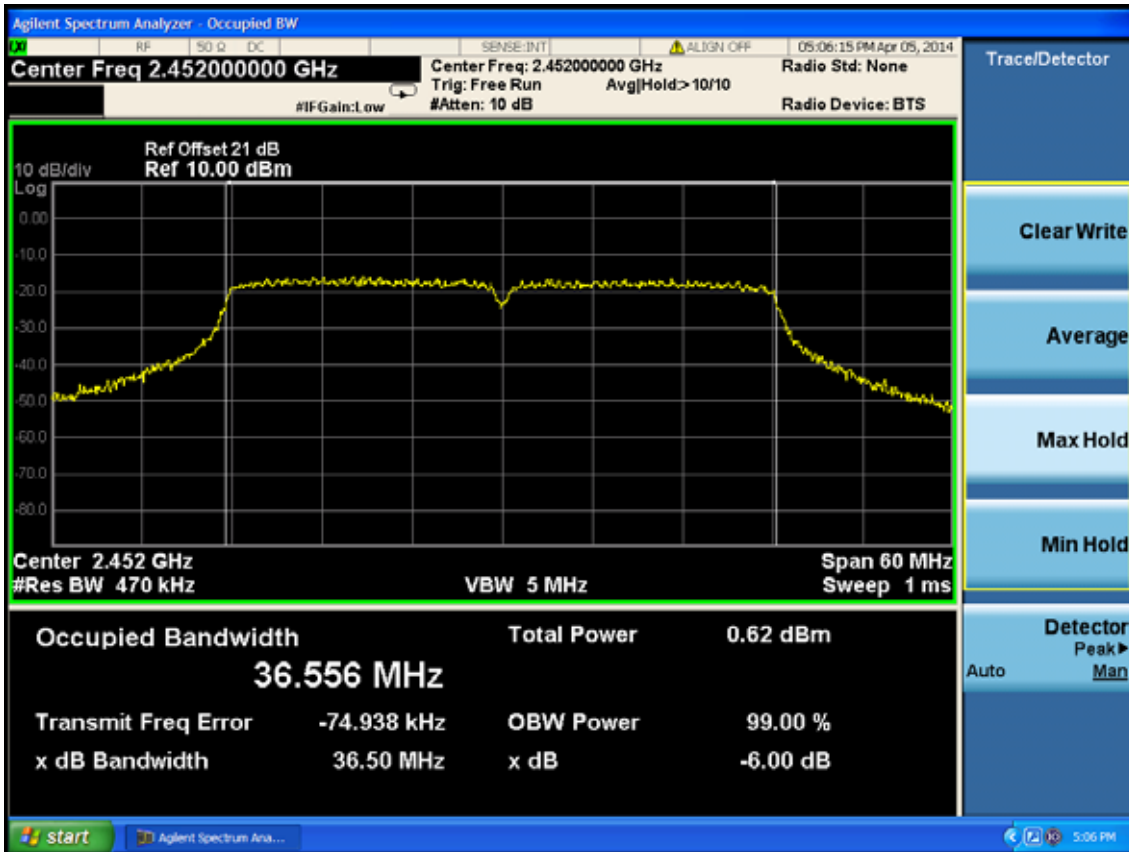


40MHz Antenna: J3

Test Mode: IEEE 802.11n HT40


Test CH1: 2422MHz

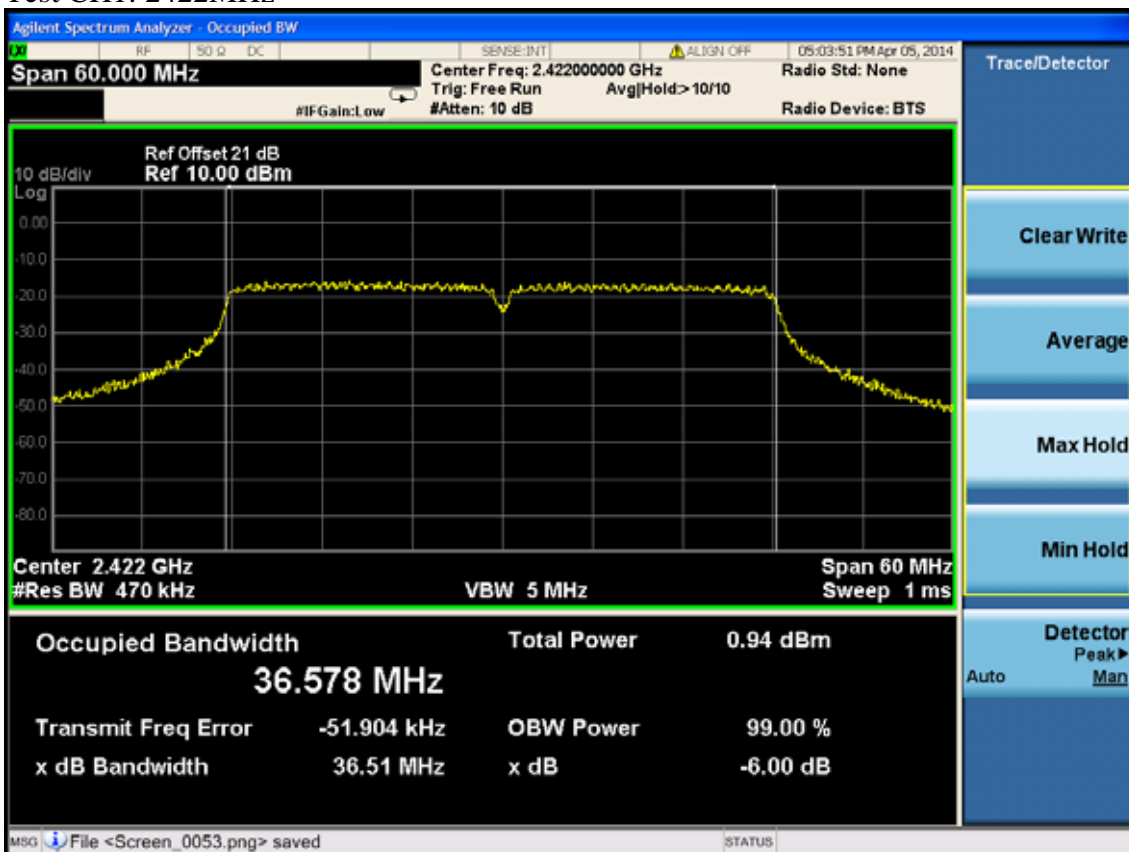

Test CH4: 2437MHz

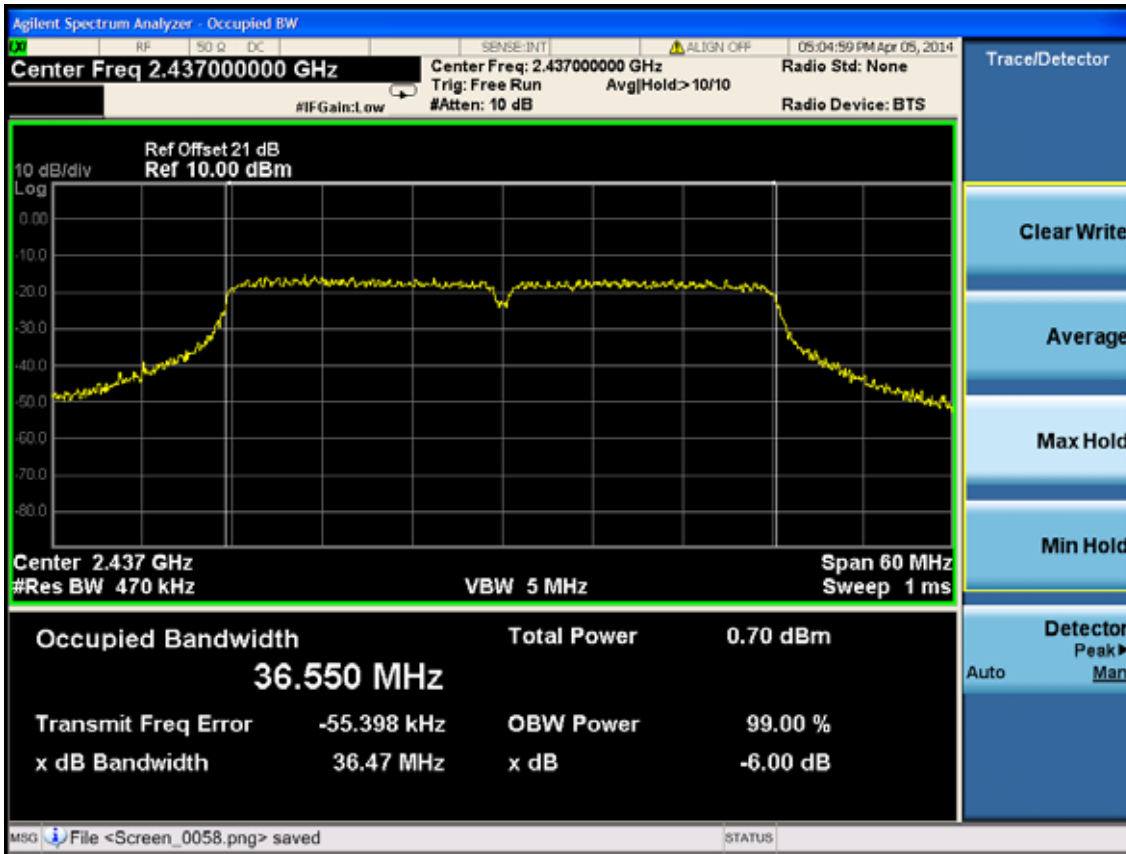

Test CH7: 2452MHz

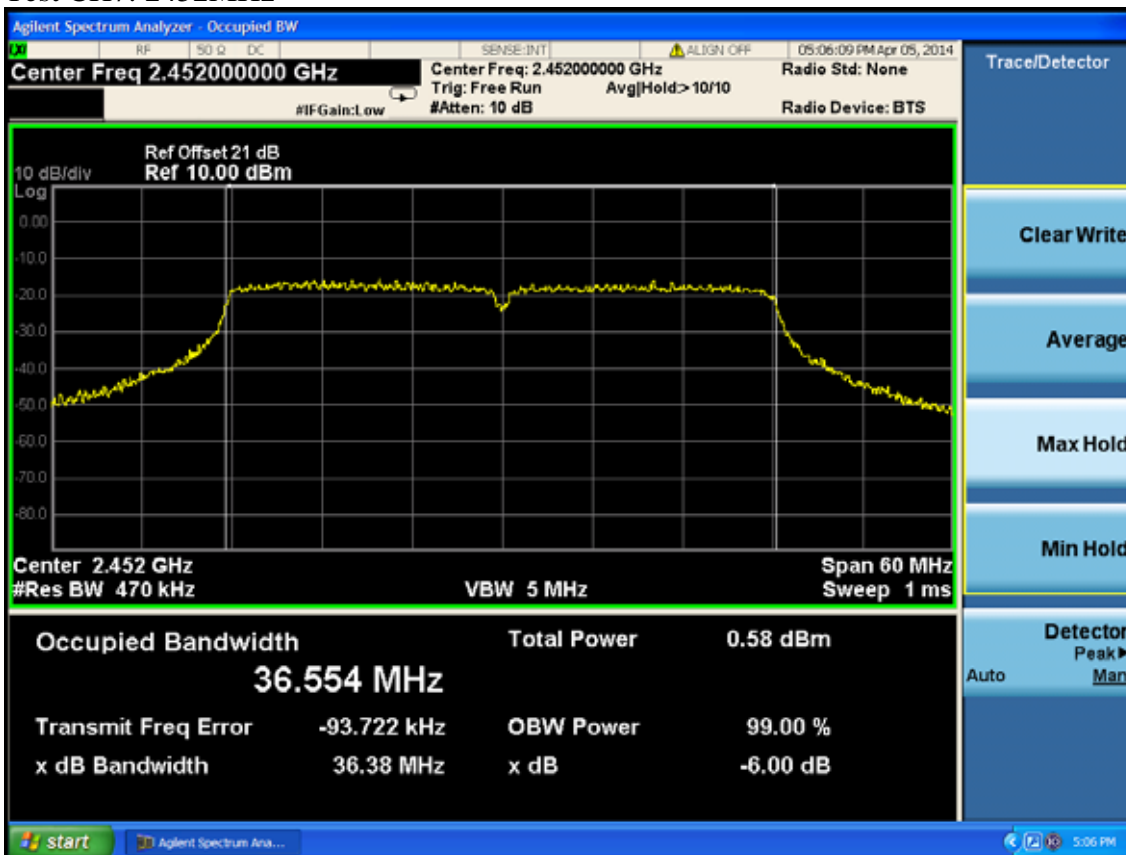

8. OUTPUT POWER TEST

8.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9030A	MY51380221	Oct.31, 13	1Year
2.	Amp	HP	8449B	3008A08495	May.08, 13	1 Year
3.	Antenna	EMCO	3115	9510-4580	May.08, 13	1Year
4.	HF Cable	Hubersuhne	Sucoflex104	-	May.08, 13	1 Year
5.	Power Meter	Anritsu	ML2487A	6K00002472	May.08, 13	1Year
6.	Power Sensor	Anritsu	MA2491A	033005	May.08, 13	1Year
7.	Spectrum Analyzer	Agilent	E4446A	US44300459	May.08, 13	1 Year

8.2. Limit (FCC Part 15C 15.247 b(3))

For systems using digital modulation in the 2400—2483.5MHz, The Peak out put Power shall not exceed 1W(30dBm)

8.3. Test Procedure

- 1, Connected the EUT's antenna port to measure device by 20dB attenuator.
- 2, For IEEE 802.11b/g and IEEE802.11n HT20 mode, use a PK power meter which's bandwidth is 20MHz and above 26dB bandwidth of signal to measure out each test modes' PK output power.
- 3, For IEEE802.11n HT40 mode, because the signal's bandwidth is about 40MHz and above 20MHz bandwidth of power sensor ML2491A. So used the test method per KDB558074.
 - 1) Set the RBW=1MHz and VBW =3MHz
 - 2) Set the span 1.5 x DTS bandwidth
 - 3) Detector = peak
 - 4) Sweep time = auto couple
 - 5) Trace Mode = max hold
 - 6) allow trace to fully stabilize
 - 7) use the spectrum analyser's integrated band power measurement function with band limits set equal to the DTS bandwidth edges.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

8.4. Test Results

5MHz

EUT: 2.4GHz 300Mbps 9dBi Outdoor CPE					
M/N: CPE210					
Test date: 2014-04-01		Pressure: 101.2±1.0 kpa		Humidity: 52.5±3.0%	
Tested by: Leo-Li		Test site: RF site		Temperature:21.7±0.6	
Cable loss: 1 dB			Attenuator loss: 20 dB		
Test Mode	CH (MHz)	Peak output Power (dBm)			Limit (dBm)
		J2	J3	Total	
11b	CH1	24.44	24.24	27.36	29
	CH6	24.18	24.64	27.43	29
	CH11	23.95	23.83	26.91	29
11g	CH1	24.14	24.26	27.22	29
	CH6	24.17	24.2	27.20	29
	CH11	24.12	24.62	27.40	29
11nHT20	CH1	24.32	24.82	27.60	28
	CH6	24.25	24.63	27.46	28
	CH11	24.19	24.36	27.29	28
Conclusion: PASS					

10MHz

EUT: 2.4GHz 300Mbps 9dBi Outdoor CPE					
M/N: CPE210					
Test date: 2014-04-01		Pressure: 101.2±1.0 kpa		Humidity: 51.2±3.0%	
Tested by: Leo-Li		Test site: RF site		Temperature:22.5±0.6	
Cable loss: 1 dB			Attenuator loss: 20 dB		
Test Mode	CH (MHz)	Peak output Power (dBm)			Limit (dBm)
		J2	J3	Total	
11b	CH1	24.46	24.11	27.31	29
	CH6	24.59	24.74	27.68	29
	CH11	24.5	24.56	27.55	29
11g	CH1	24.19	24.25	27.24	29
	CH6	24.32	24.42	27.39	29
	CH11	24.31	24.26	27.30	29
11nHT20	CH1	24.39	24.43	27.43	28
	CH6	24.57	24.38	27.49	28
	CH11	24.61	24.29	27.47	28
Conclusion: PASS					

20MHz

EUT: 2.4GHz 300Mbps 9dBi Outdoor CPE		
M/N: CPE210		
Test date: 2014-3-25	Pressure: 101.3±1.0 kpa	Humidity: 52.2±3.0%
Tested by: Leo-Li	Test site: RF site	Temperature:21.4±0.6

Cable loss: 1 dB		Attenuator loss: 20 dB			
Test Mode	CH (MHz)	Peak output Power (dBm)			Limit (dBm)
		J2	J3	Total	
11b	CH1	24.61	24.86	27.75	29
	CH6	24.25	24.72	27.50	29
	CH11	24.27	24.37	27.33	29
11g	CH1	24.19	25.55	27.93	29
	CH6	24.27	25.24	27.79	29
	CH11	24.44	25.31	27.91	29
11nHT20	CH1	22.42	22.95	25.70	28
	CH6	24.49	25.07	27.80	28
	CH11	22.53	22.66	25.61	28

Conclusion: PASS

40MHz

EUT: 2.4GHz 300Mbps 9dBi Outdoor CPE		
M/N: CPE210		
Test date: 2014-3-25	Pressure: 101.3±1.0 kpa	Humidity: 52.2±3.0%
Tested by: Leo-Li	Test site: RF site	Temperature:21.4±0.6

Cable loss: 1 dB		Attenuator loss: 20 dB			
Test Mode	CH (MHz)	Peak output Power (dBm)			Limit (dBm)
		J2	J3	Total	
11nHT40	CH1	21.59	22.88	25.29	28
	CH4	24.77	25.11	27.95	28
	CH7	21.07	21.70	24.41	28

Conclusion: PASS

Note: 1.IEEE802.11b/g use IDD Mode

the Directional (Gain= $G_{ANT} + \text{Array Gain}$ (Array gain=0dB)
=9dBi

2. IEEE802.11n Mode


the Directional (Gain= $G_{ANT} + 10\log(G_{ANT}/N_{SS})$
=9dBi+10log2
=12dBi

3.This is Point to Point device so the power limit for 11b/g Mode is 29dBi and 11n Mode is 28dBi

40MHz Antenna: J2
 Test Mode: IEEE 802.11n HT40
 Test CH1: 2422MHz



Test CH4: 2437MHz

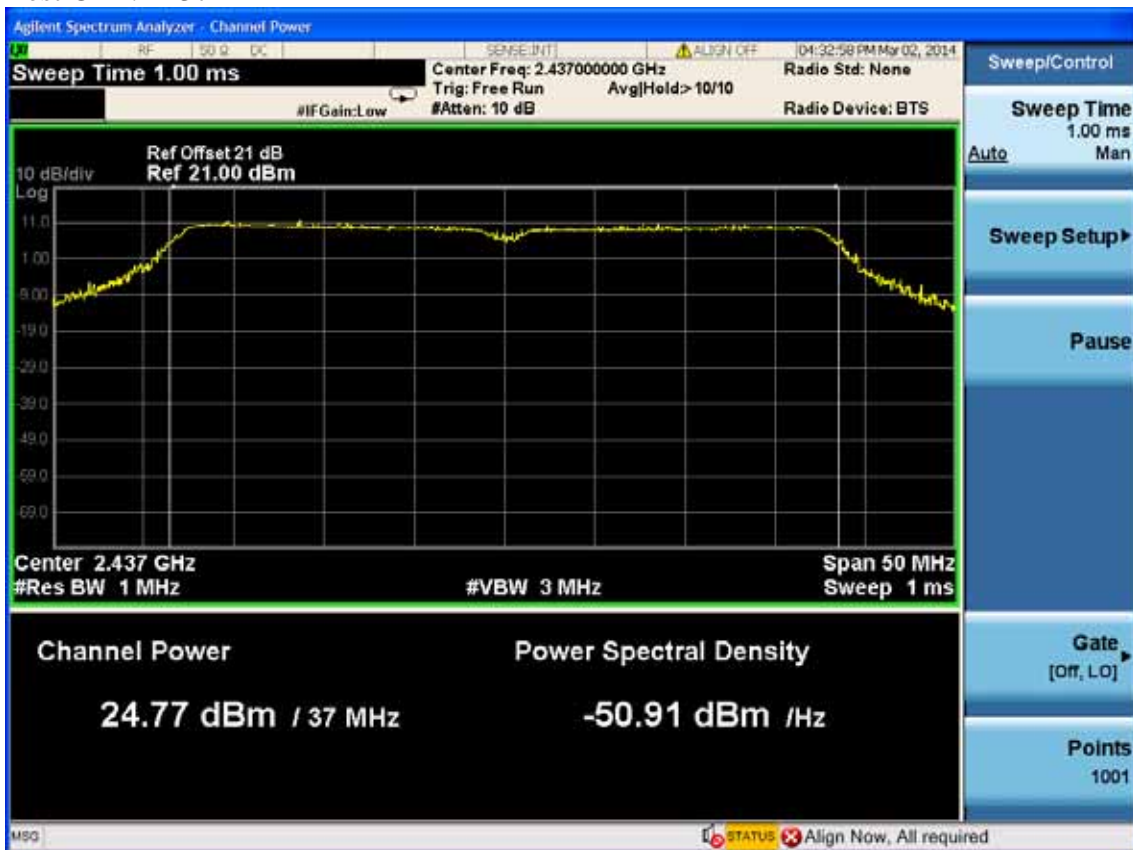

Test CH7: 2452MHz



40MHz Antenna: J3

Test Mode: IEEE 802.11n HT40

Test CH1: 2422MHz



Test CH4: 2437MHz



Test CH7: 2452MHz



9. POWER SPECTRAL DENSITY TEST

9.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9030A	MY51380221	Oct.31, 13	1 Year
2.	Amp	HP	8449B	3008A08495	May.08, 13	1 Year
3.	Antenna	EMCO	3115	9607-4580	Aug.28, 13	1Year
4.	HF Cable	Hubersuhne	Sucoflex104	-	May.08, 13	1 Year

9.2. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

9.3. Test Procedure

1. Connected the EUT's antenna port to spectrum analyzer device by 20dB attenuator.
2. Set the test frequency as center frequency, Set RBW=3KHz, VBW=10KHz, Span large enough capture the entire frequency, Read out maximum peak level frequency
3. Set the frequency read from produce 2 as center frequency, then set the span= 300KHz, Sweep time=Span/RBW, Then Max hold, read out each mode and each chain's Power density.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude.

9.4. Test Results
5MHz

EUT: 2.4GHz 300Mbps 9dBi Outdoor CPE		
M/N: CPE210		
Test date:2014-04-06	Pressure: 101.7±1.0kpa	Humidity: 53.8±3.0 %
Tested by:Leo-Li	Test site: RF site	Temperature: 21.6±0.6

Cable loss: 1 dB		Attenuator loss: 20 dB			
Test Mode	CH	Result			Limit (dBm/3KHz)
		Power density (dBm/3KHz)			
		J2	J3	Total	
11b	CH1	-4.189	-3.443	-0.79	8
	CH6	-4.188	-3.141	-0.62	8
	CH11	-4.180	-3.950	-1.05	8
11g	CH1	-6.197	-5.786	-2.98	8
	CH6	-5.658	-5.169	-2.40	8
	CH11	-5.473	-4.926	-2.18	8
11n HT20	CH1	-6.376	-6.012	-3.18	8
	CH6	-6.336	-6.044	-3.18	8
	CH11	-5.146	-5.867	-2.48	8

Conclusion: PASS

10MHz

EUT: 2.4GHz 300Mbps 9dBi Outdoor CPE		
M/N: CPE210		
Test date:2014-04-06	Pressure: 101.7±1.0kpa	Humidity: 53.3±3.0 %
Tested by:Leo-Li	Test site: RF site	Temperature: 21.4±0.6

Cable loss: 1 dB		Attenuator loss: 20 dB			
Test Mode	CH	Result			Limit (dBm/3KHz)
		Power density (dBm/3KHz)			
		J2	J3	Total	
11b	CH1	-0.431	-0.599	2.50	8
	CH6	0.588	0.458	3.53	8
	CH11	0.791	0.880	3.85	8
11g	CH1	-9.283	-9.280	-6.27	8
	CH6	-8.032	-8.137	-5.07	8
	CH11	-8.039	-8.185	-5.10	8
11n HT20	CH1	-7.954	-8.557	-5.23	8
	CH6	-6.425	-6.005	-3.20	8
	CH11	-6.555	-7.237	-3.87	8

Conclusion: PASS

20MHz

EUT: 2.4GHz 300Mbps 9dBi Outdoor CPE		
M/N: CPE210		
Test date:2014-04-06	Pressure: 101.6±1.0kpa	Humidity: 52.8±3.0 %
Tested by:Leo-Li	Test site: RF site	Temperature: 22.6±0.6

Cable loss: 1 dB		Attenuator loss: 20 dB			
Test Mode	CH	Result			Limit (dBm/3KHz)
		Power density (dBm/3KHz)			
		J2	J3	Total	
11b	CH1	-7.560	-7.895	-4.71	8
	CH6	-7.446	-8.362	-4.87	8
	CH11	-7.783	-8.160	-4.96	8
11g	CH1	-14.546	-15.196	-11.85	8
	CH6	-9.509	-9.569	-6.53	8
	CH11	-14.577	-14.961	-11.75	8
11n HT20	CH1	-14.142	-14.697	-11.40	8
	CH6	-9.406	-11.095	-7.16	8
	CH11	-14.256	-13.608	-10.91	8

Conclusion: PASS

40MHz

EUT: 2.4GHz 300Mbps 9dBi Outdoor CPE		
M/N: CPE210		
Test date:2014-04-06	Pressure: 101.6±1.0kpa	Humidity: 52.8±3.0 %
Tested by:Leo-Li	Test site: RF site	Temperature: 22.6±0.6



Cable loss: 1 dB		Attenuator loss: 20 dB			
Test Mode	CH	Result			Limit (dBm/3KHz)
		Power density (dBm/3KHz)			
		J2	J3	Total	
11nHT40	CH1	-17.814	-16.547	-14.12	8
	CH4	-17.597	-16.477	-13.99	8
	CH7	-14.263	-12.906	-10.52	8


Conclusion: PASS

Note: According to KDB 662911. Directional
 Gain= $G_{ANT} + \text{Array} = 9\text{dBi} + 10\log 2 = 12\text{dBi}$
 This is Point to Point device, so the power density limit is 8 dBm/3KHz.

5MHz Antenna: J2

Test Mode: IEEE 802.11b

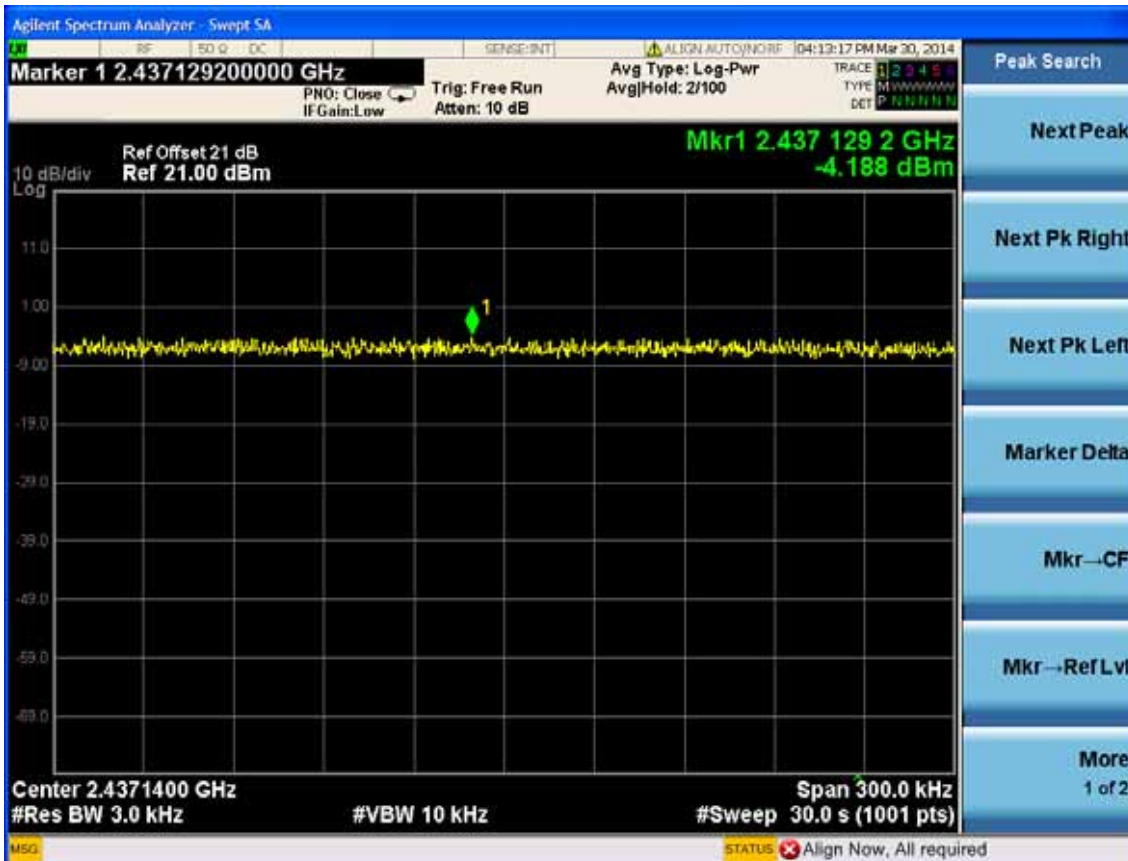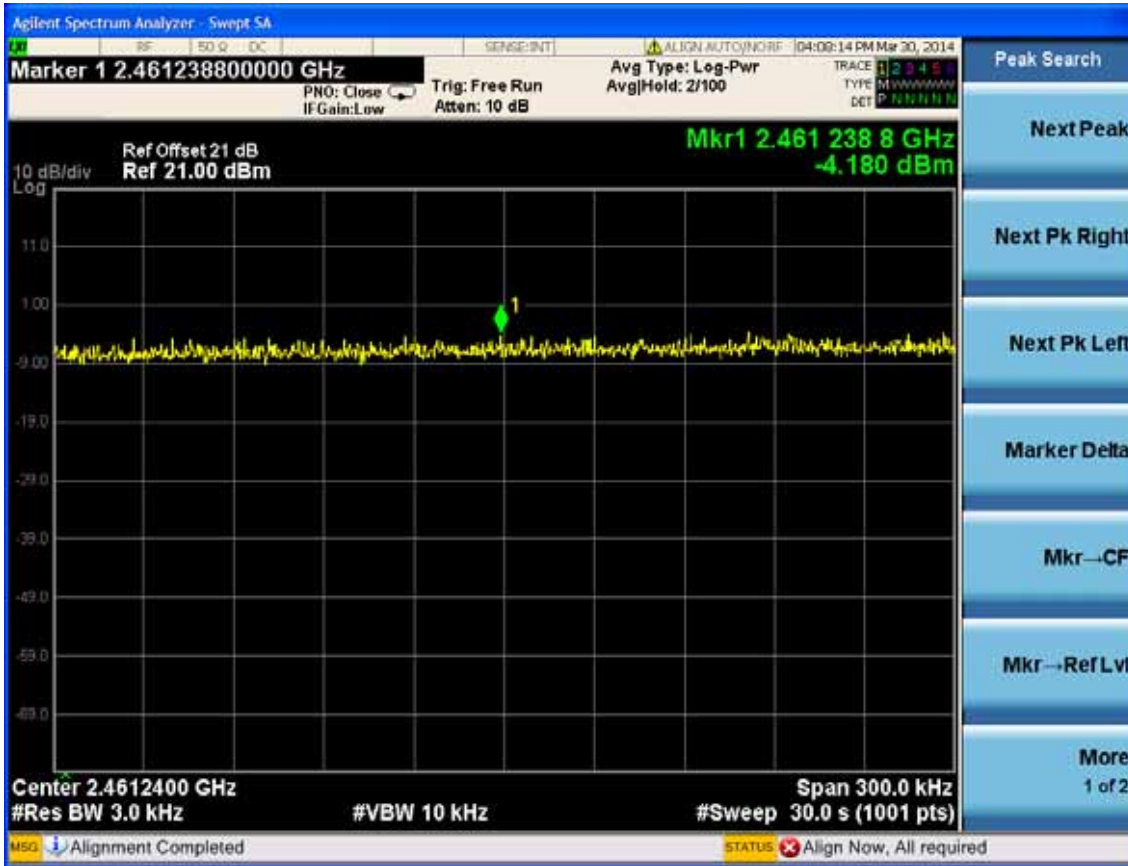

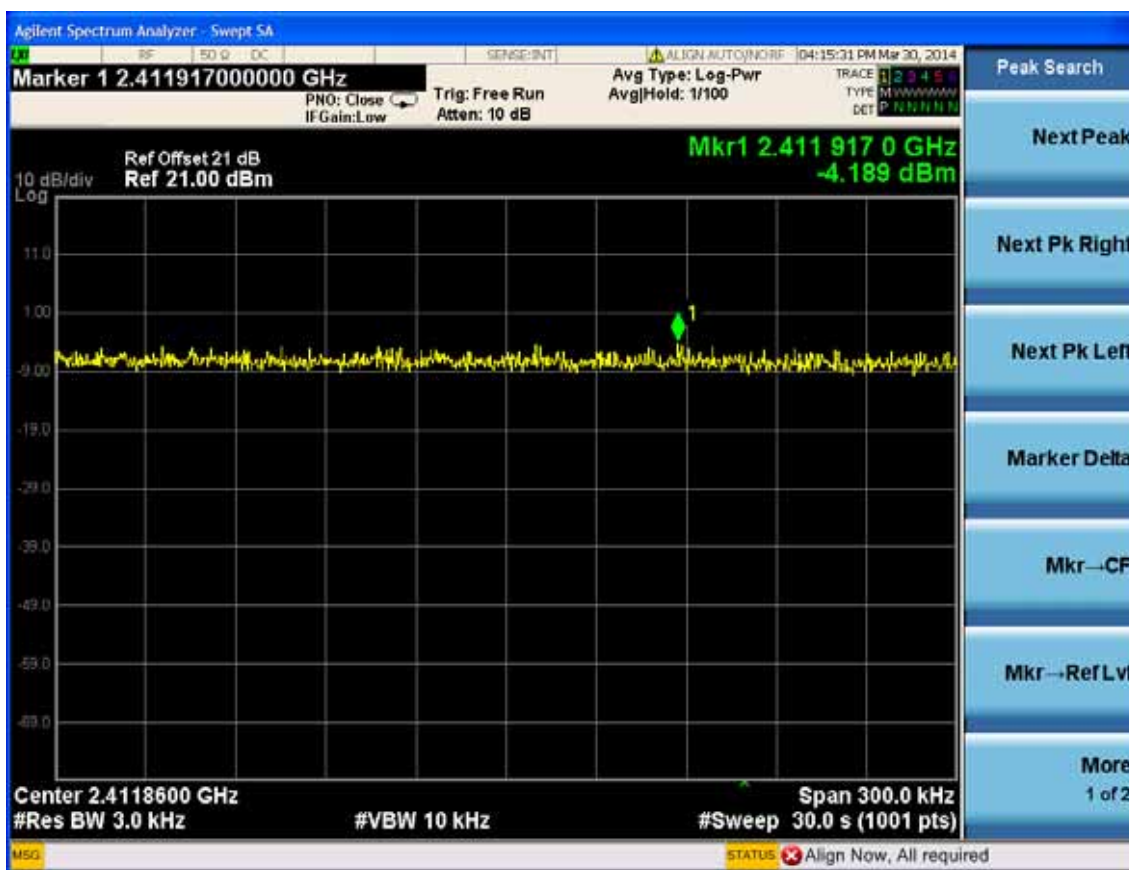

Test Mode: IEEE 802.11g






Test Mode: IEEE 11nHT20







5MHz Antenna: J3

Test Mode: IEEE 802.11b

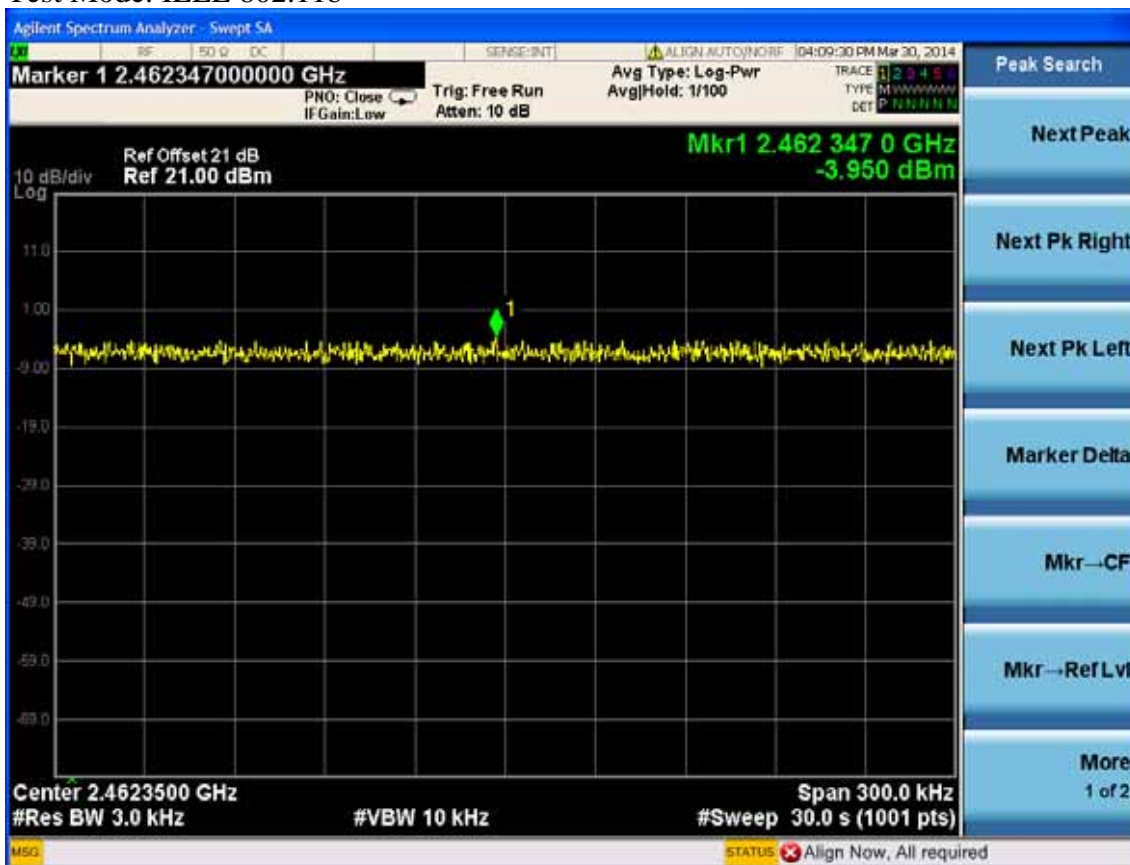

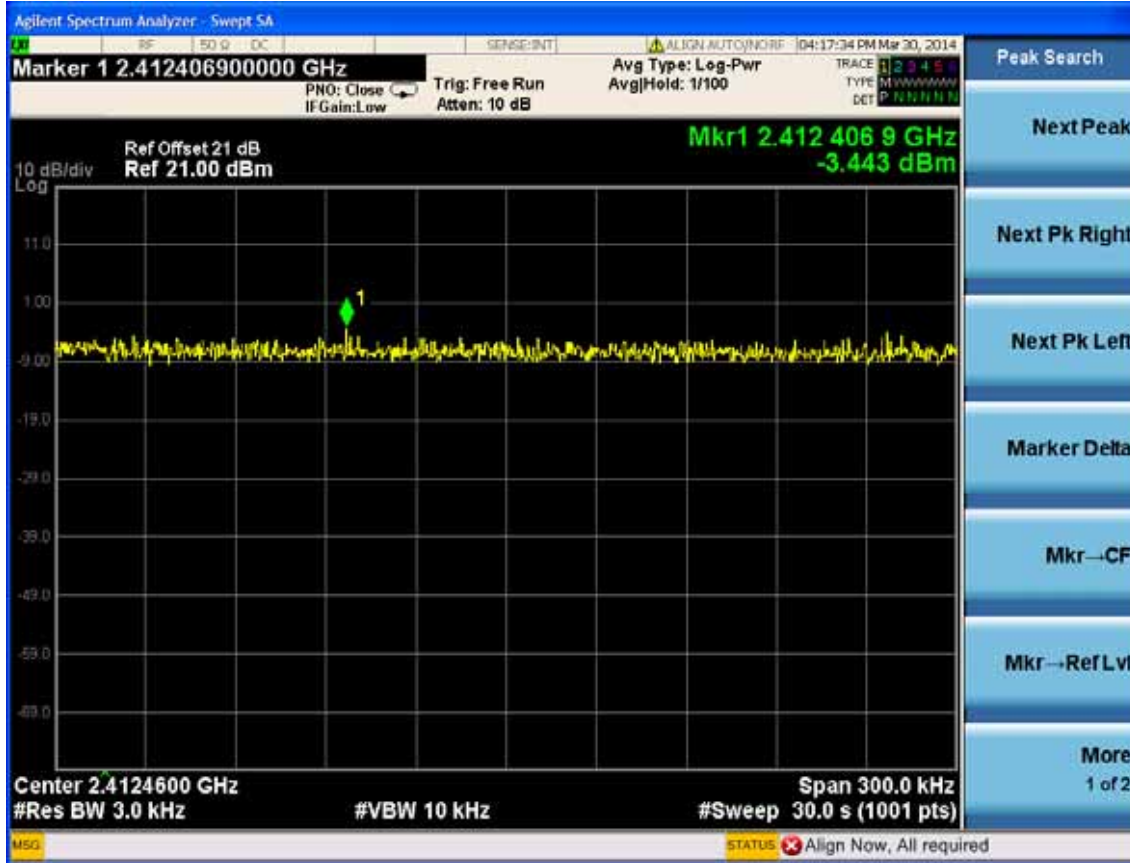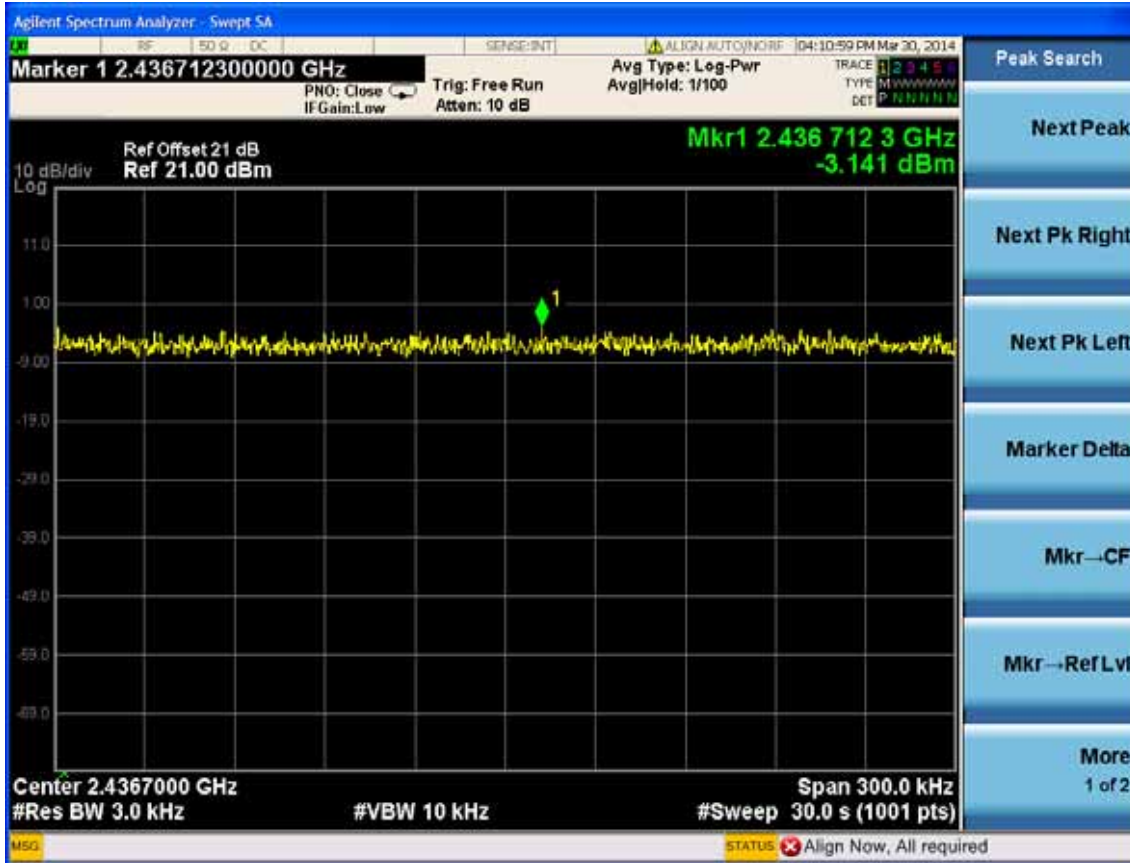

Test Mode: IEEE 802.11g








Test Mode: IEEE 11nHT20





10MHz Antenna: J2
 Test Mode: IEEE 802.11b

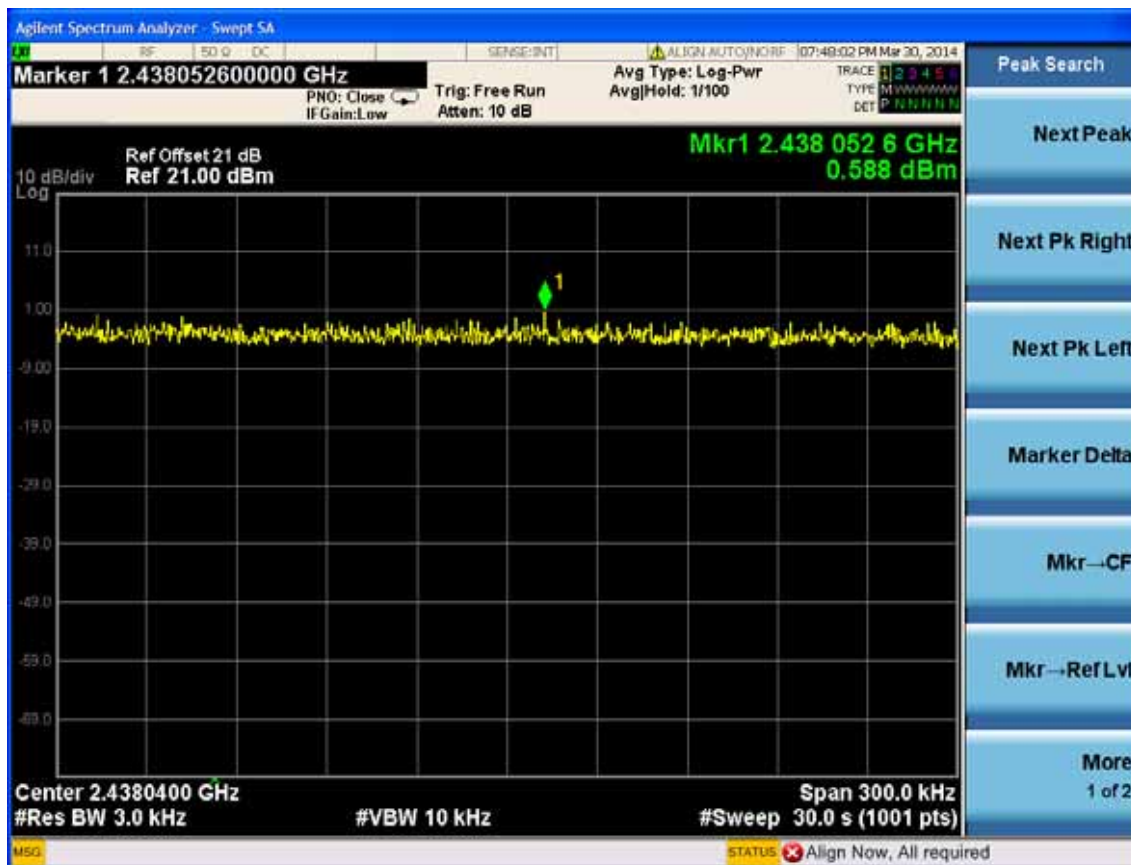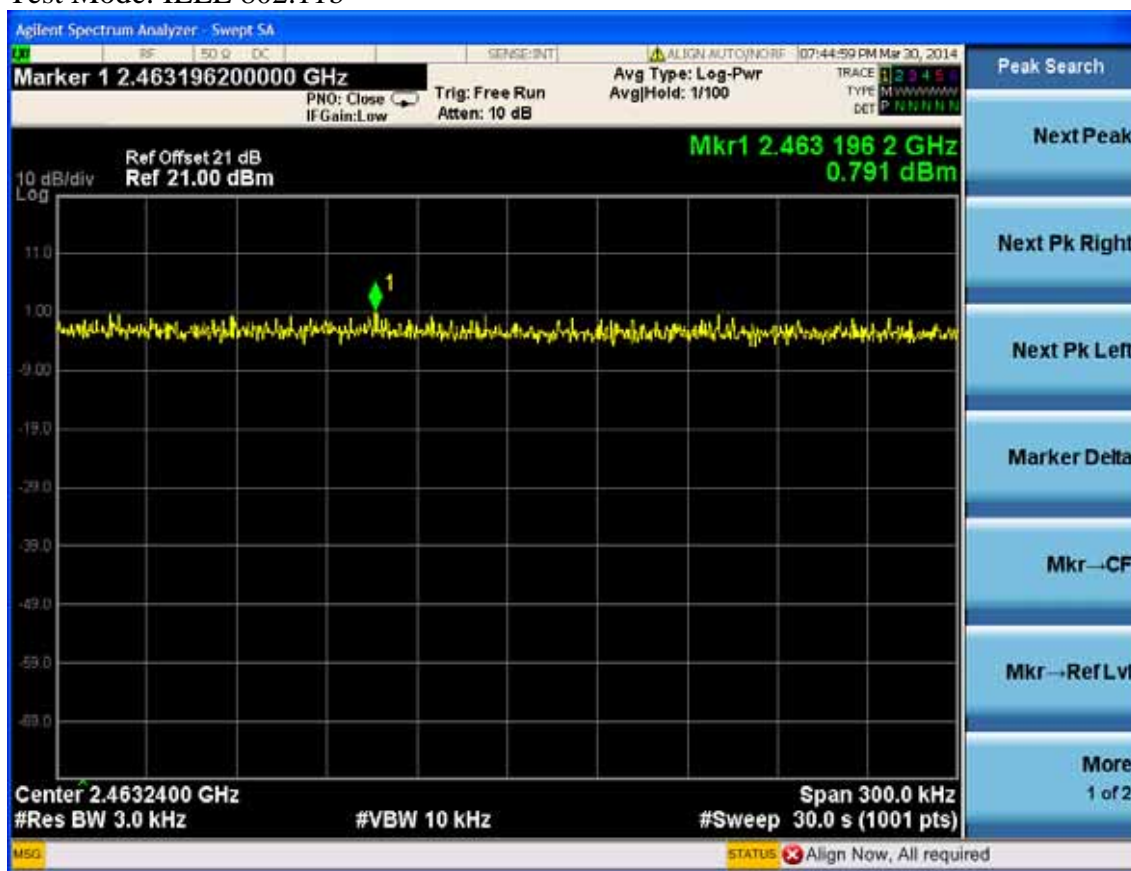

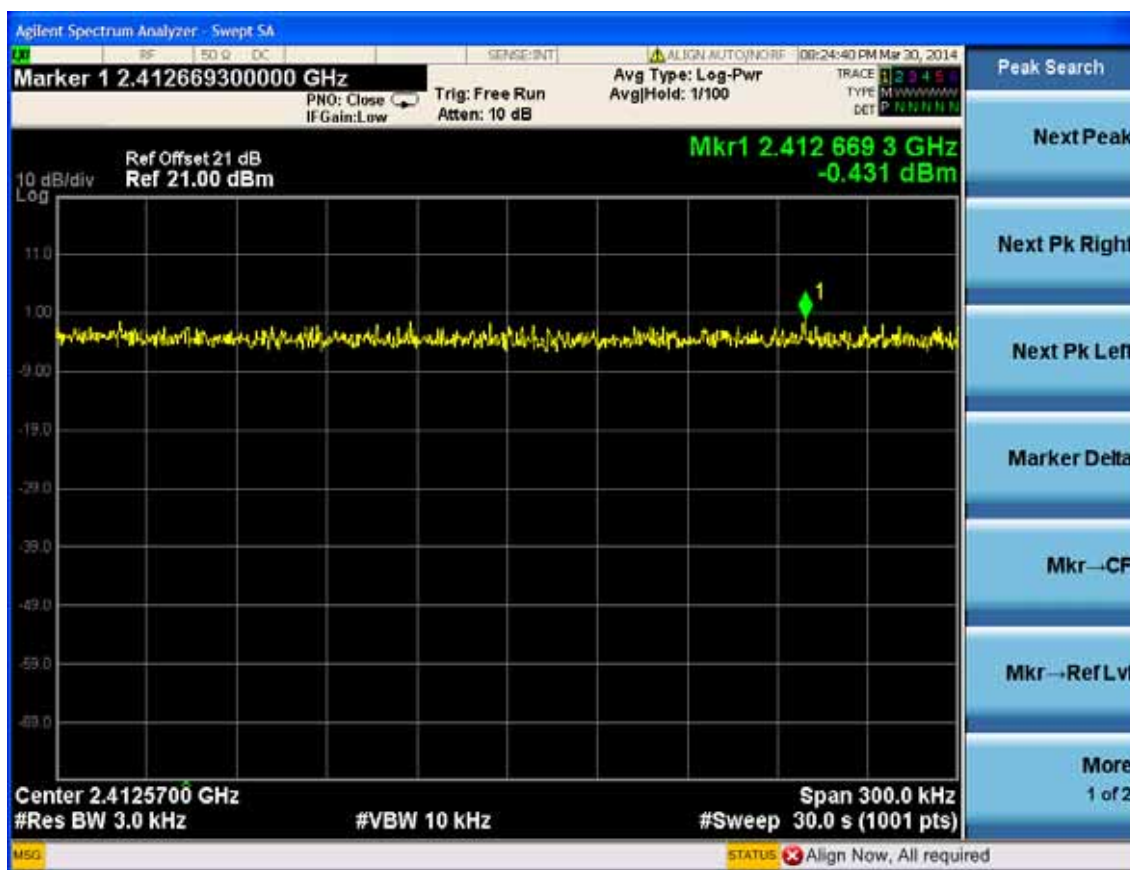

Test Mode: IEEE 802.11g







Test Mode: IEEE 11nHT20





10MHz Antenna: J3
Test Mode: IEEE 802.11b



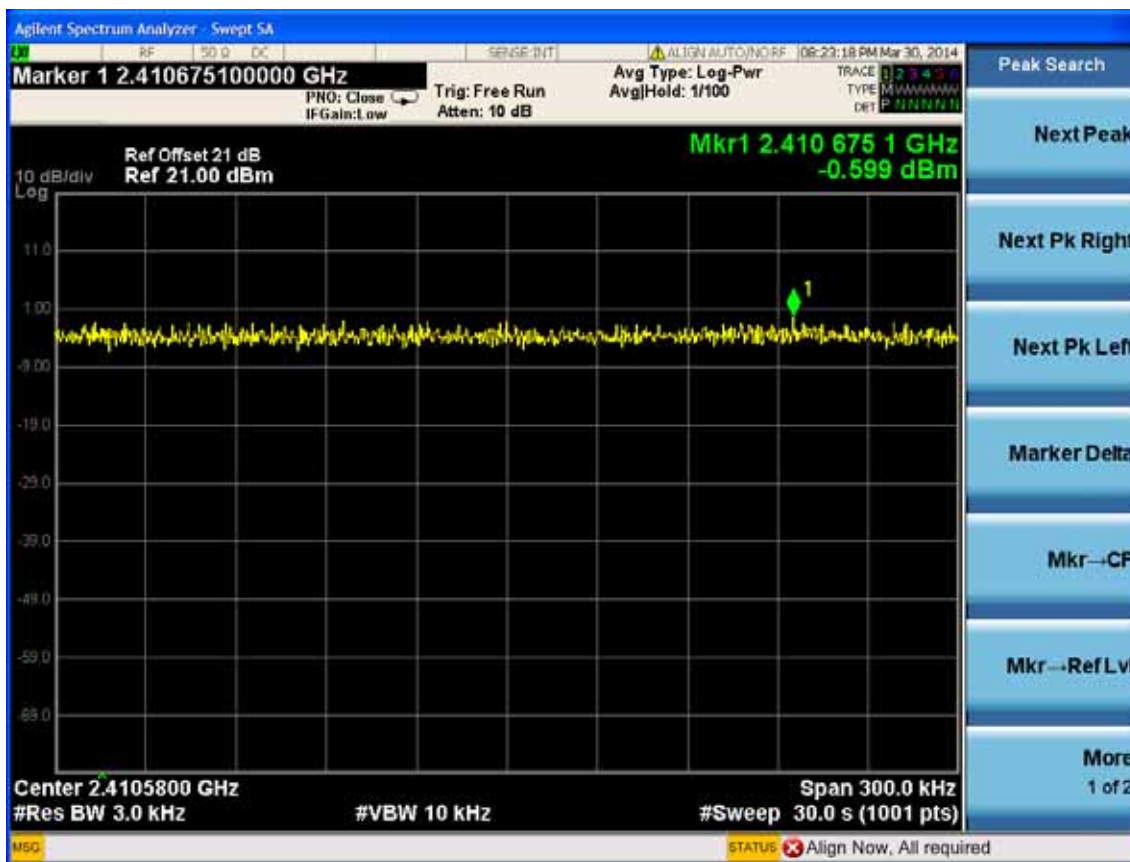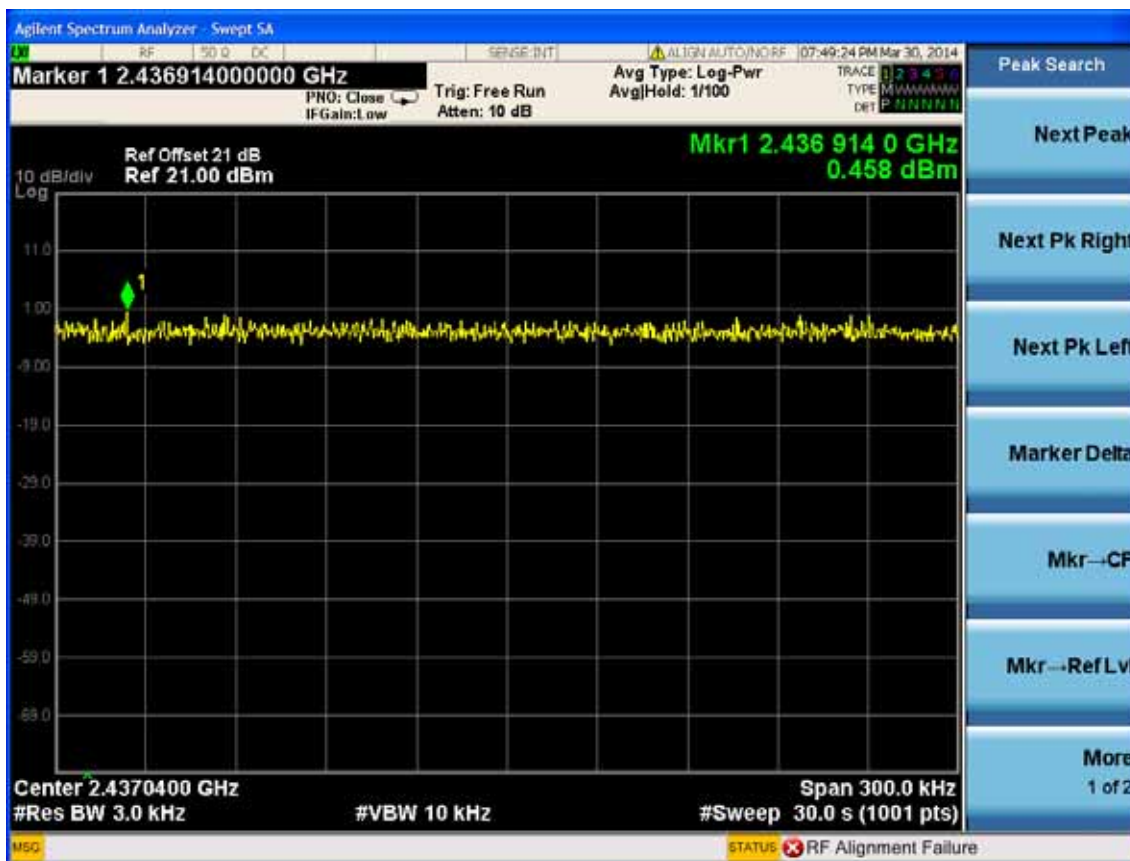

Test Mode: IEEE 802.11g








Test Mode: IEEE 11nHT20







20MHz Antenna: J2 Test Mode: IEEE 802.11b

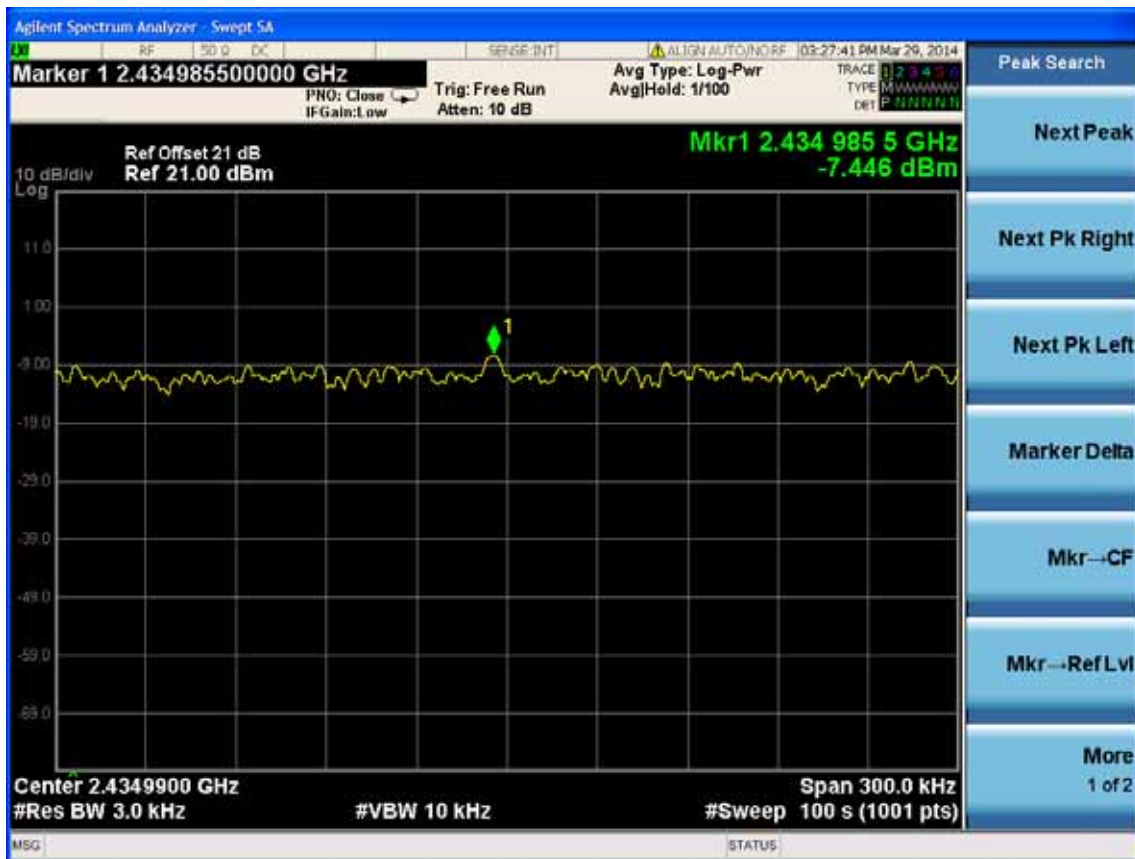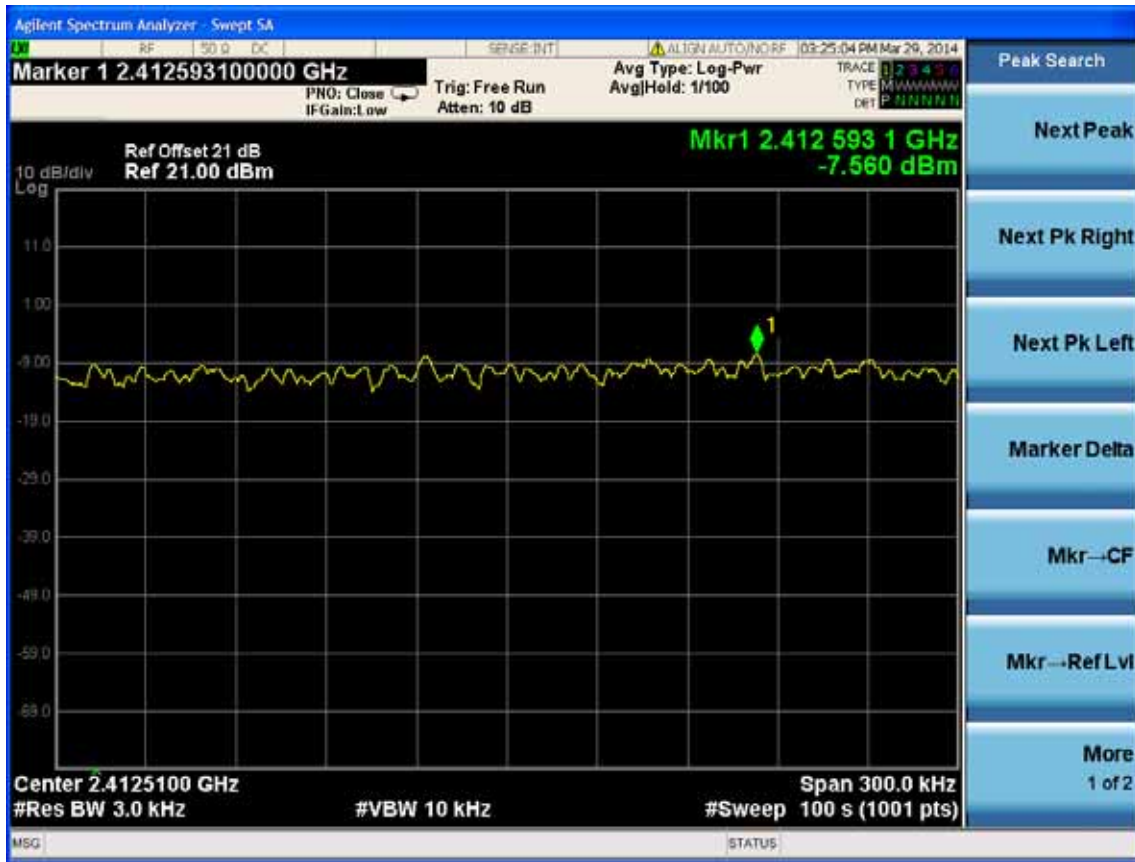

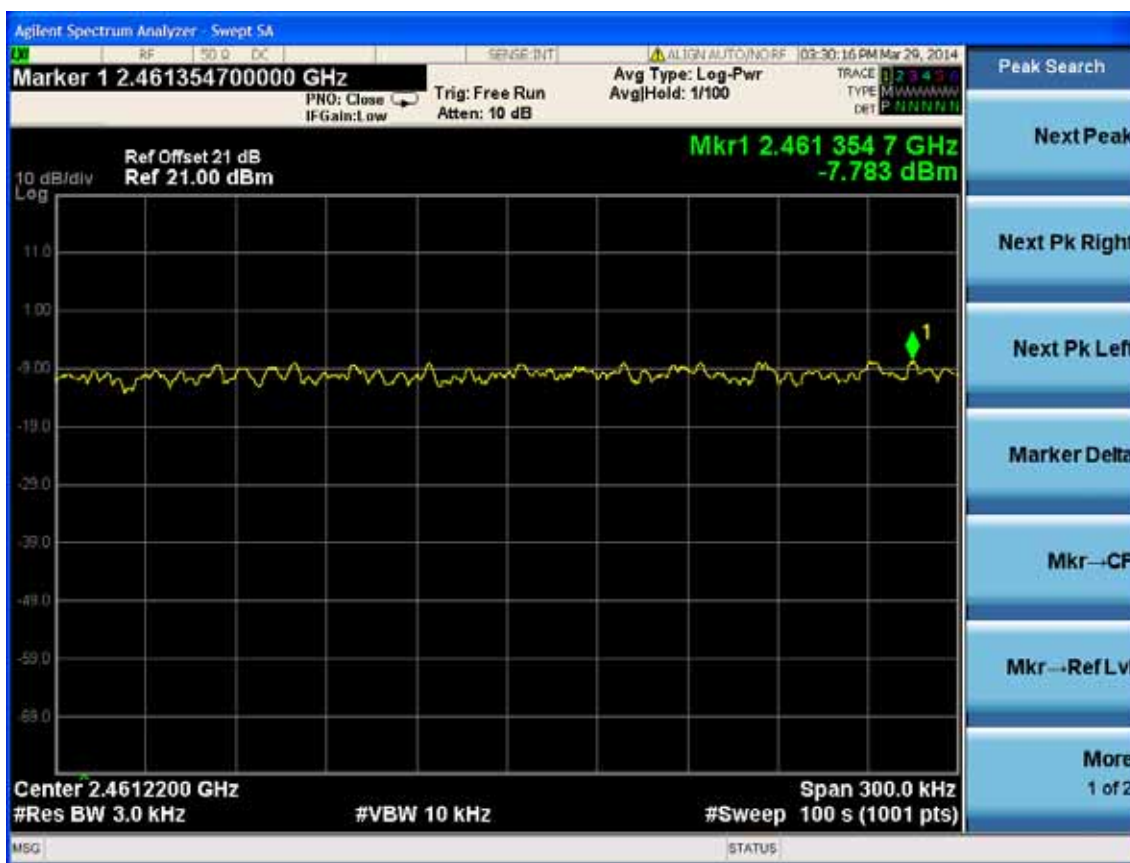

Test Mode: IEEE 802.11g



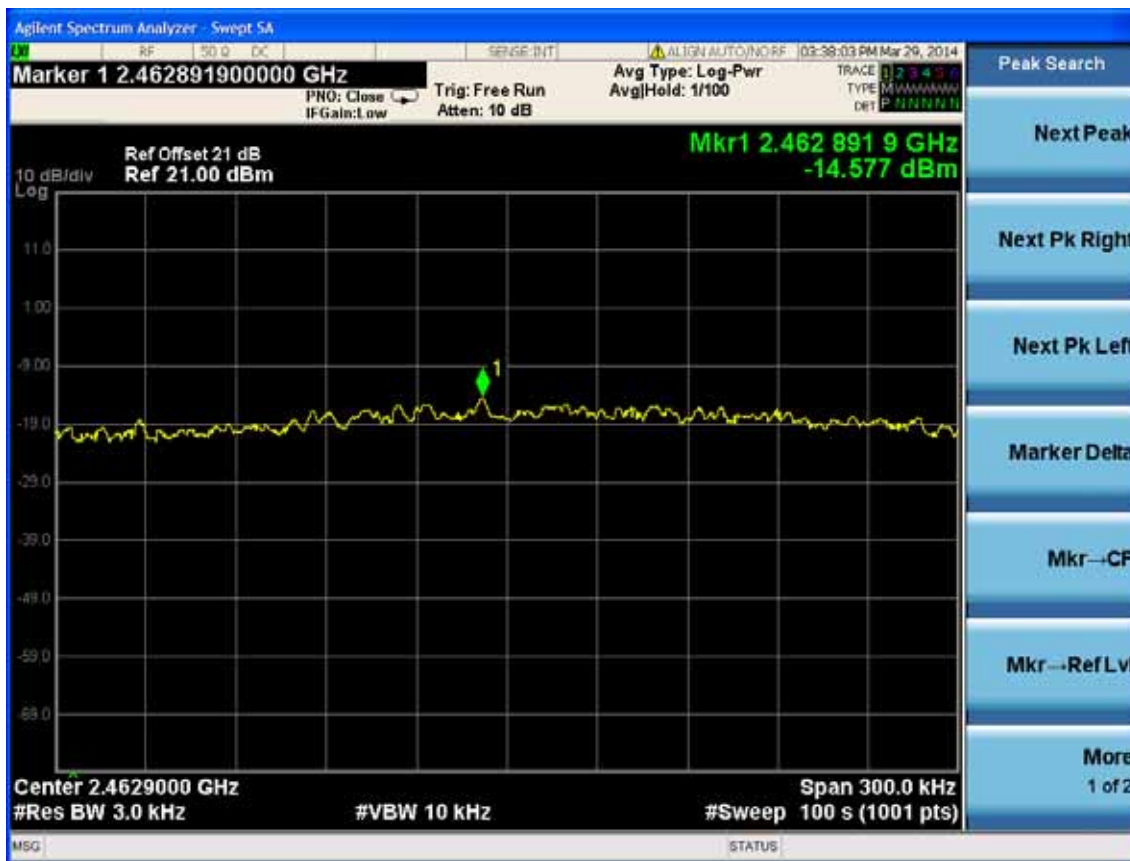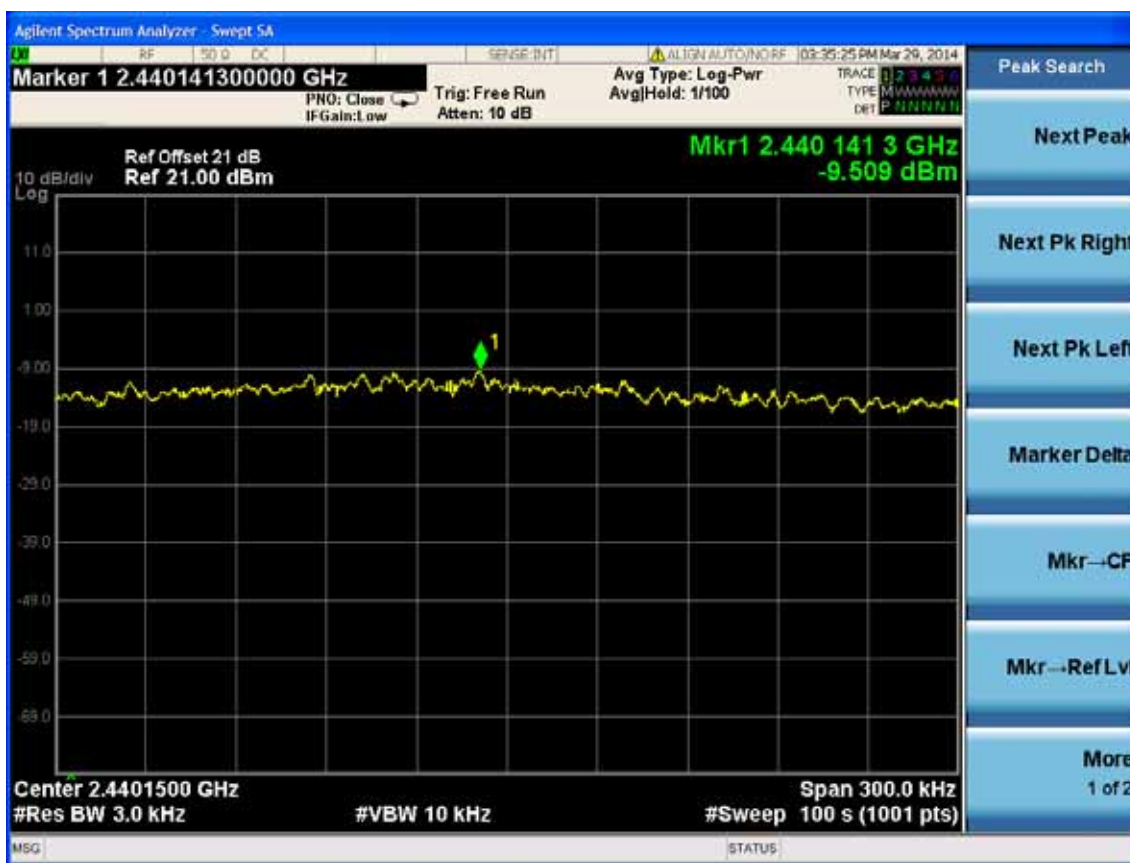




Test Mode: IEEE 11nHT20








20MHz Antenna: J3
Test Mode: IEEE 802.11b

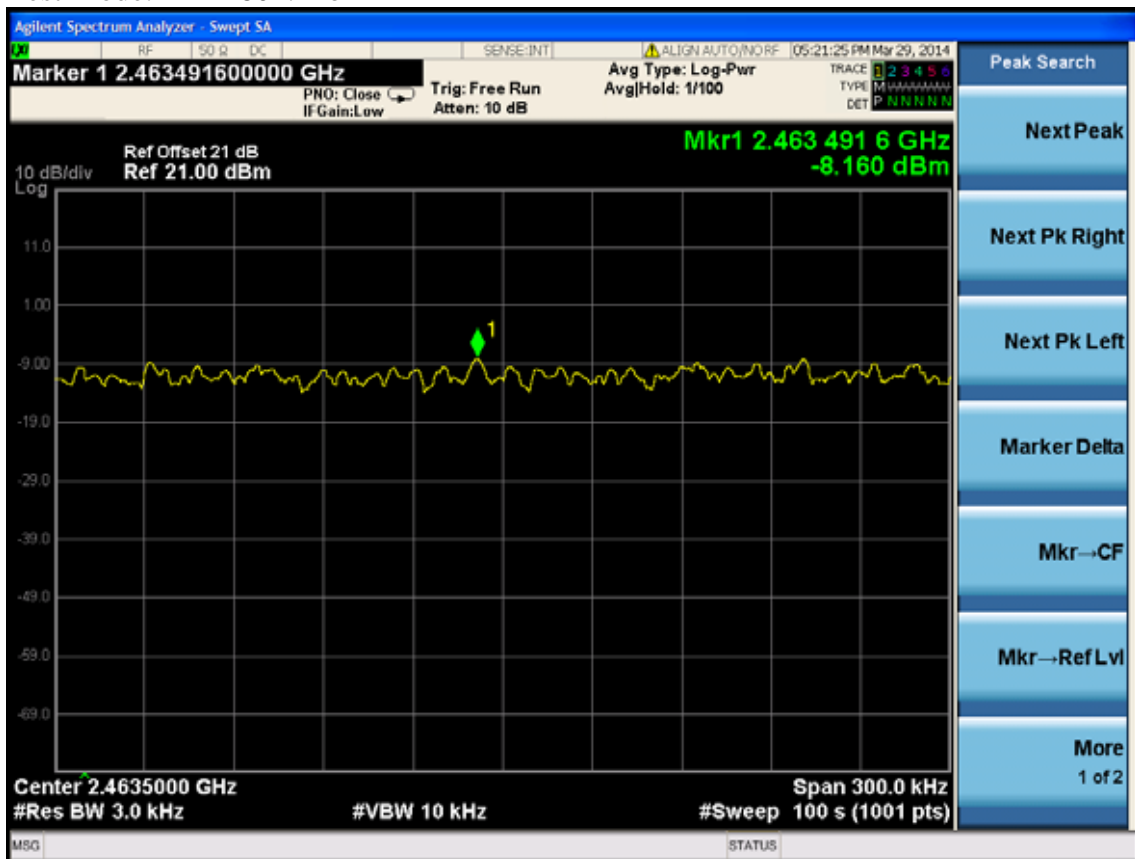

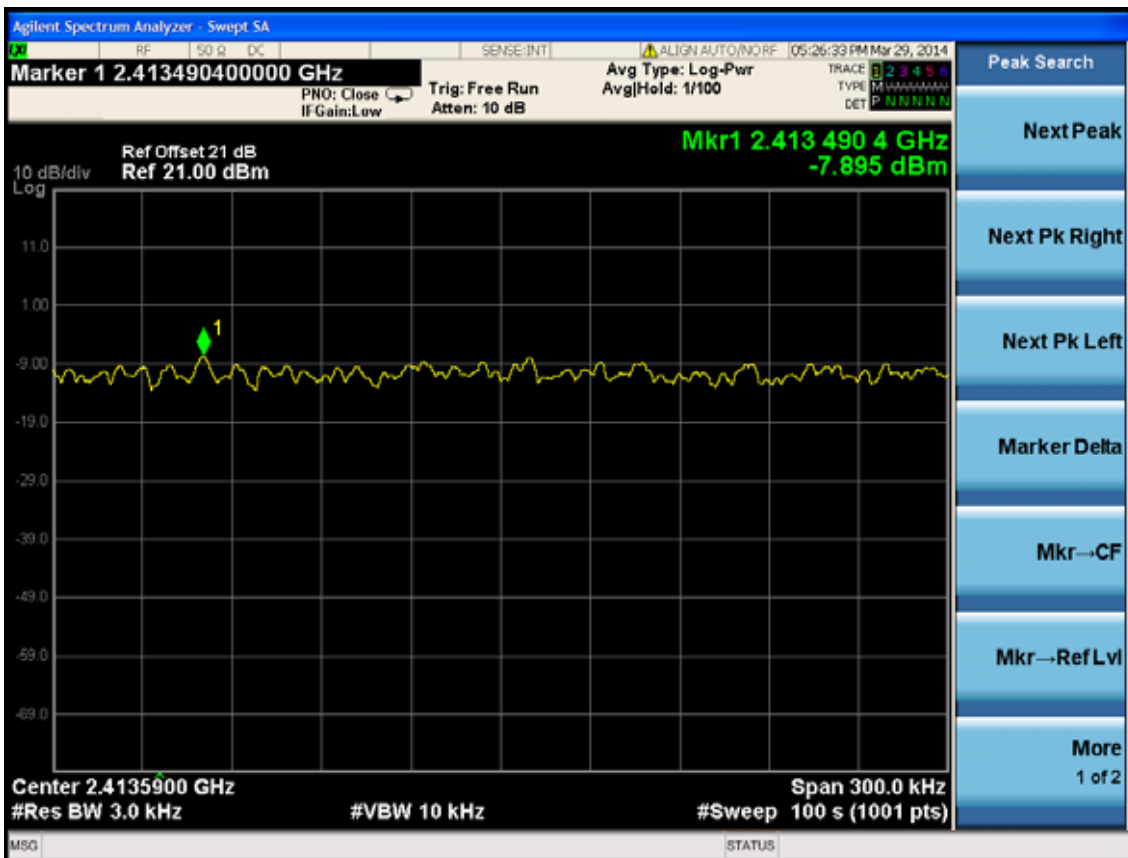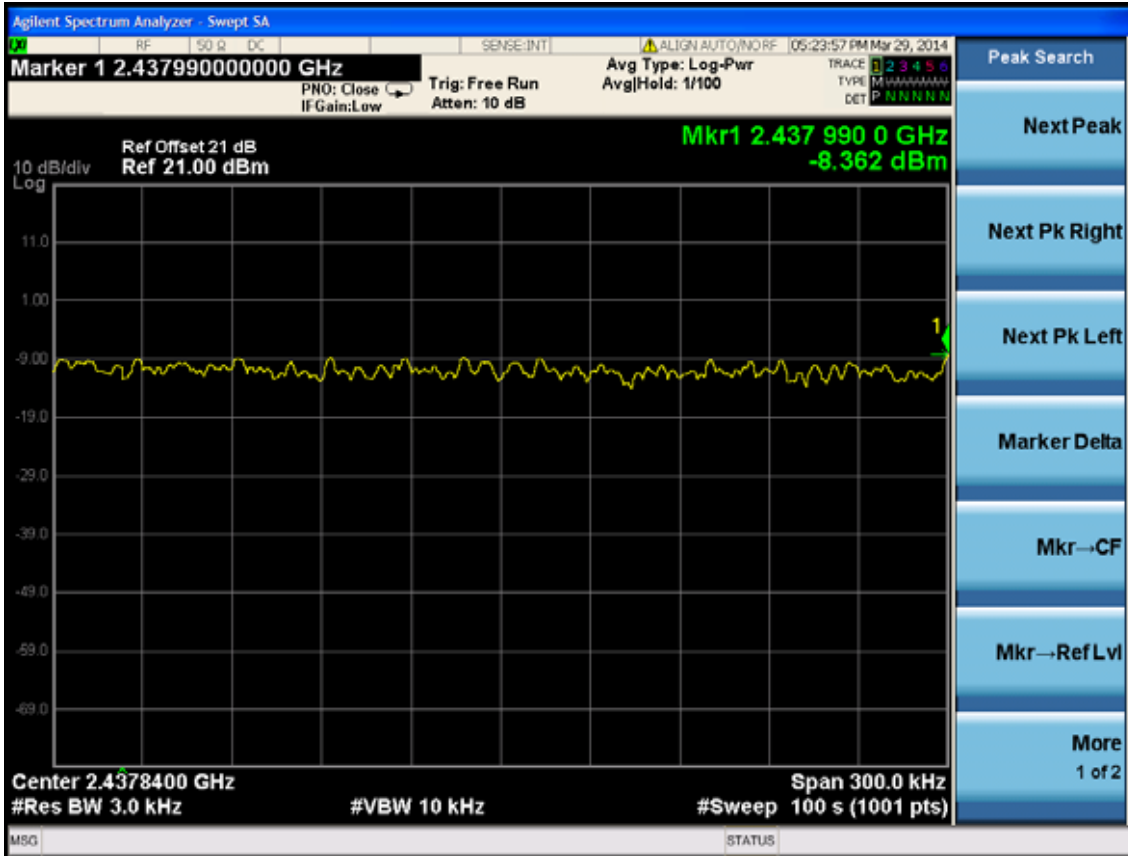




Test Mode: IEEE 802.11g

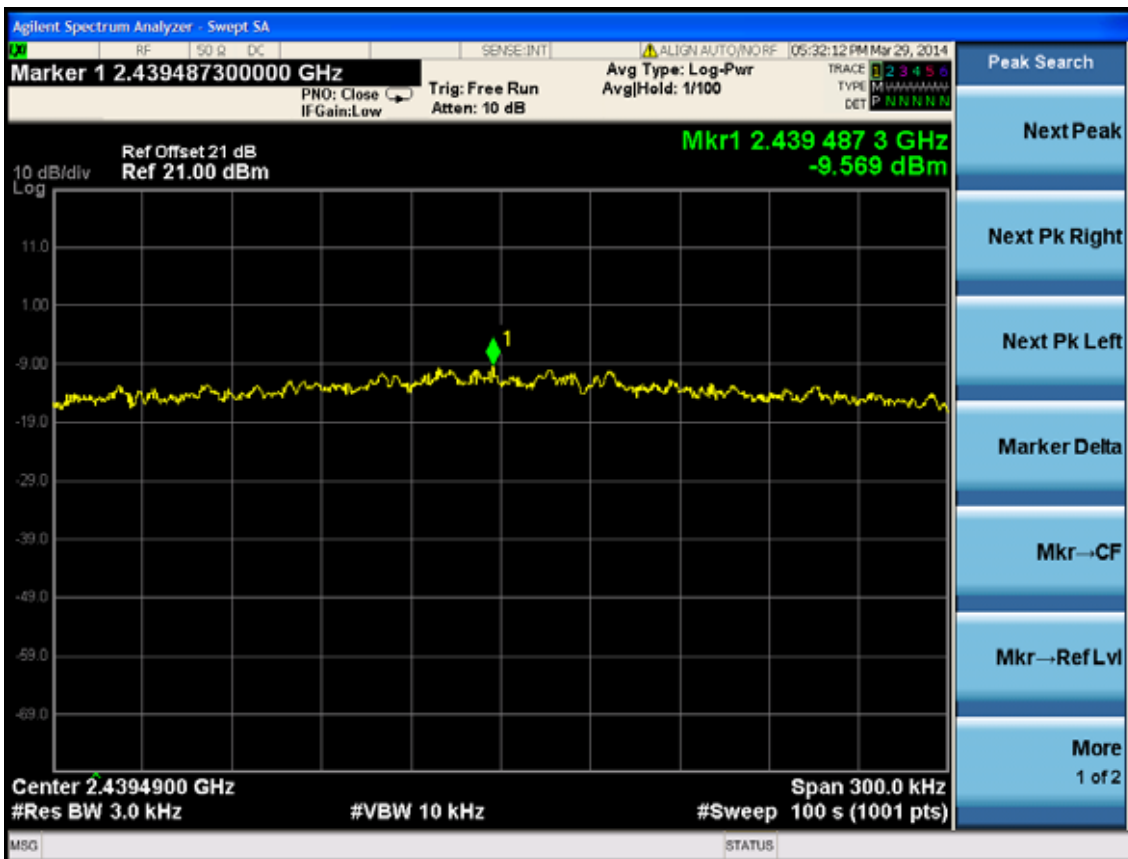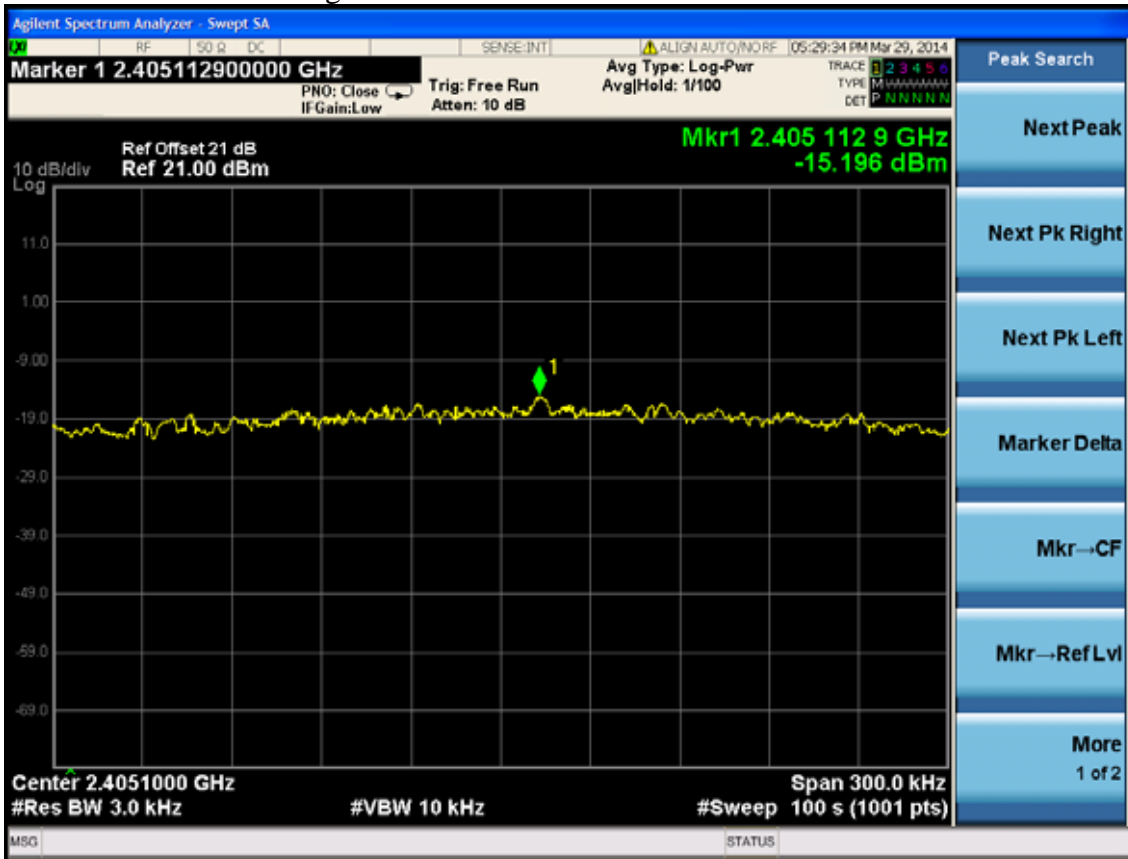


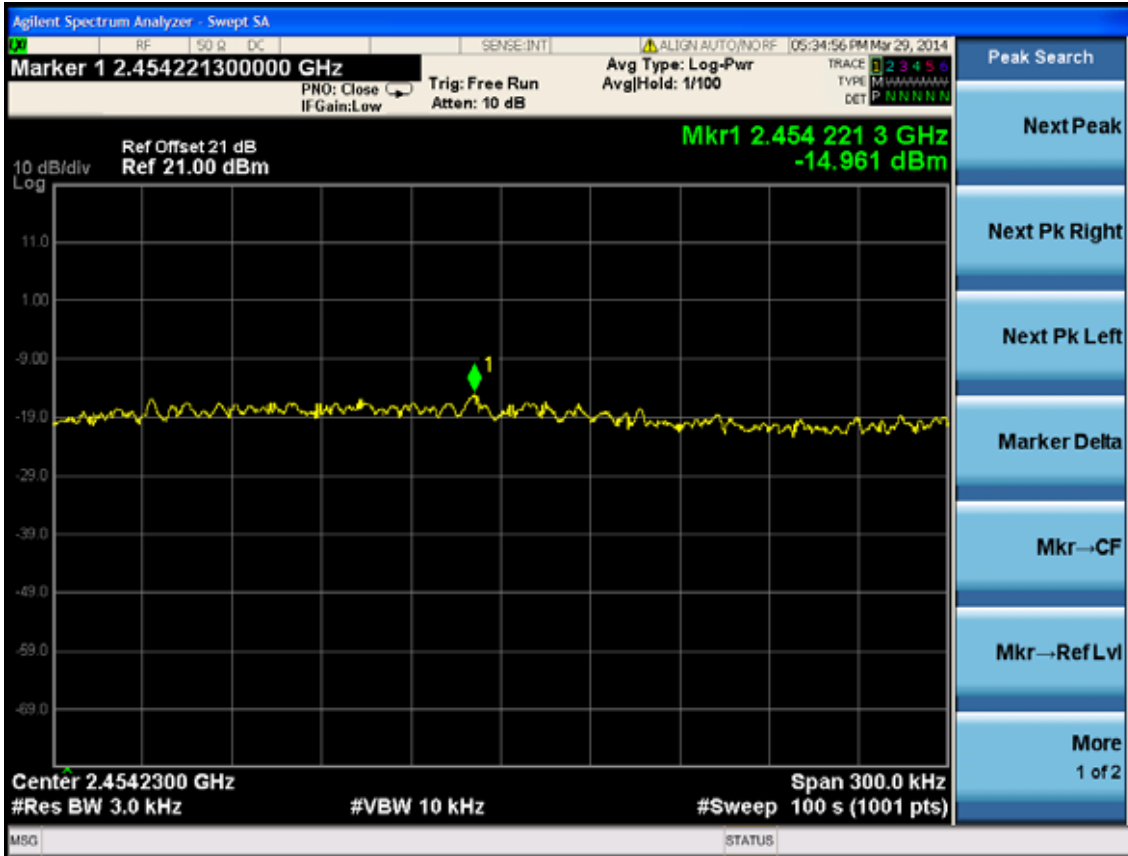



Test Mode: IEEE 11nHT20

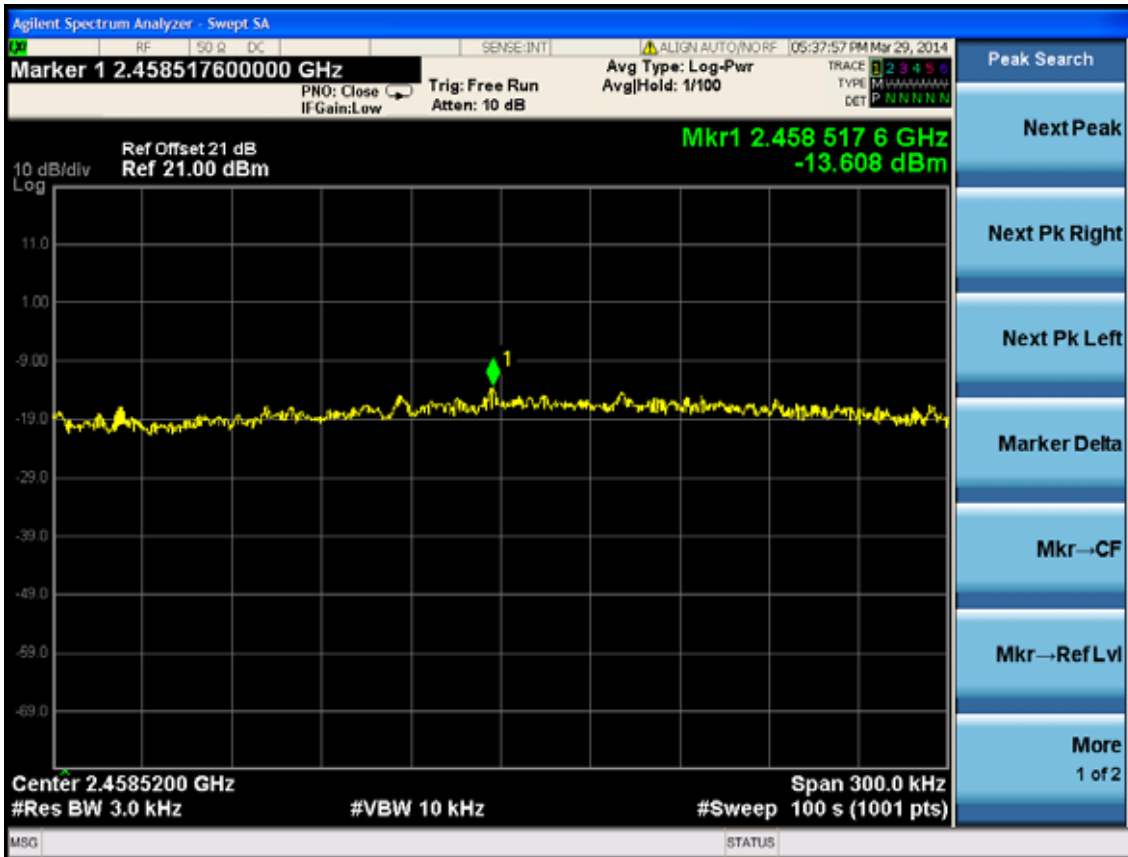

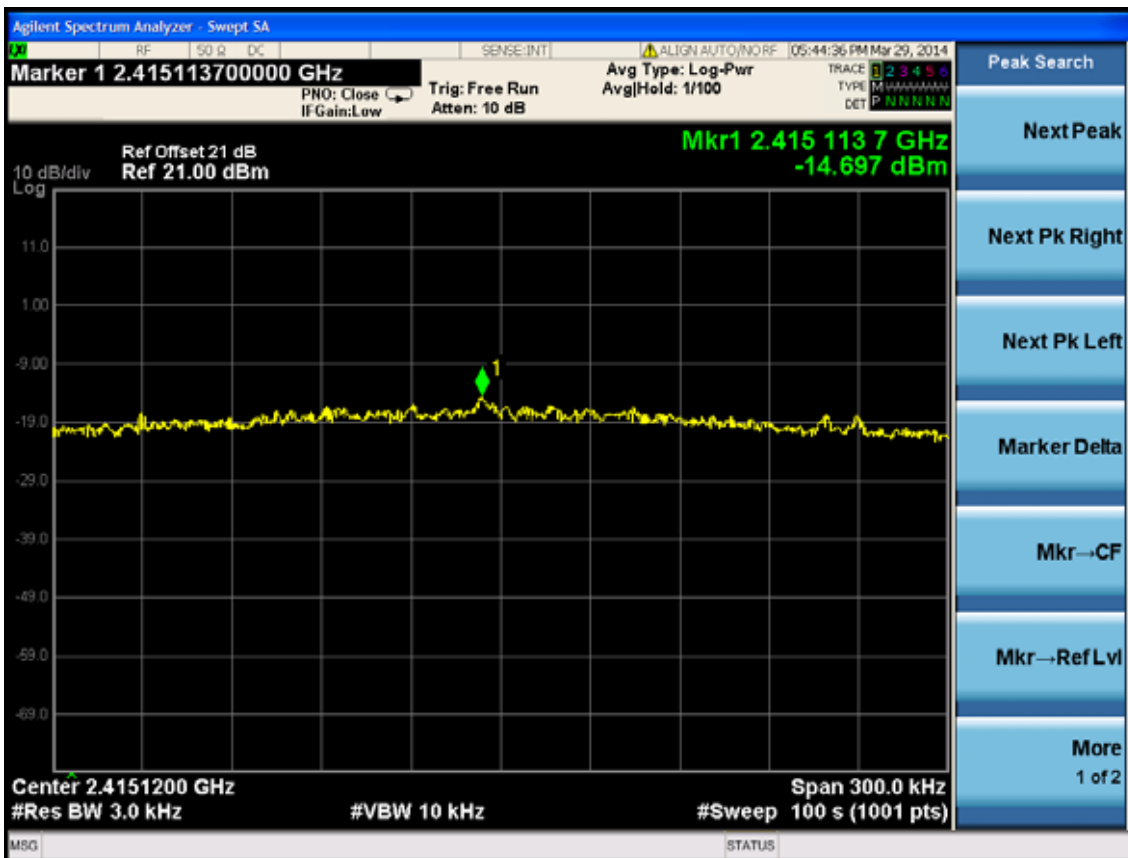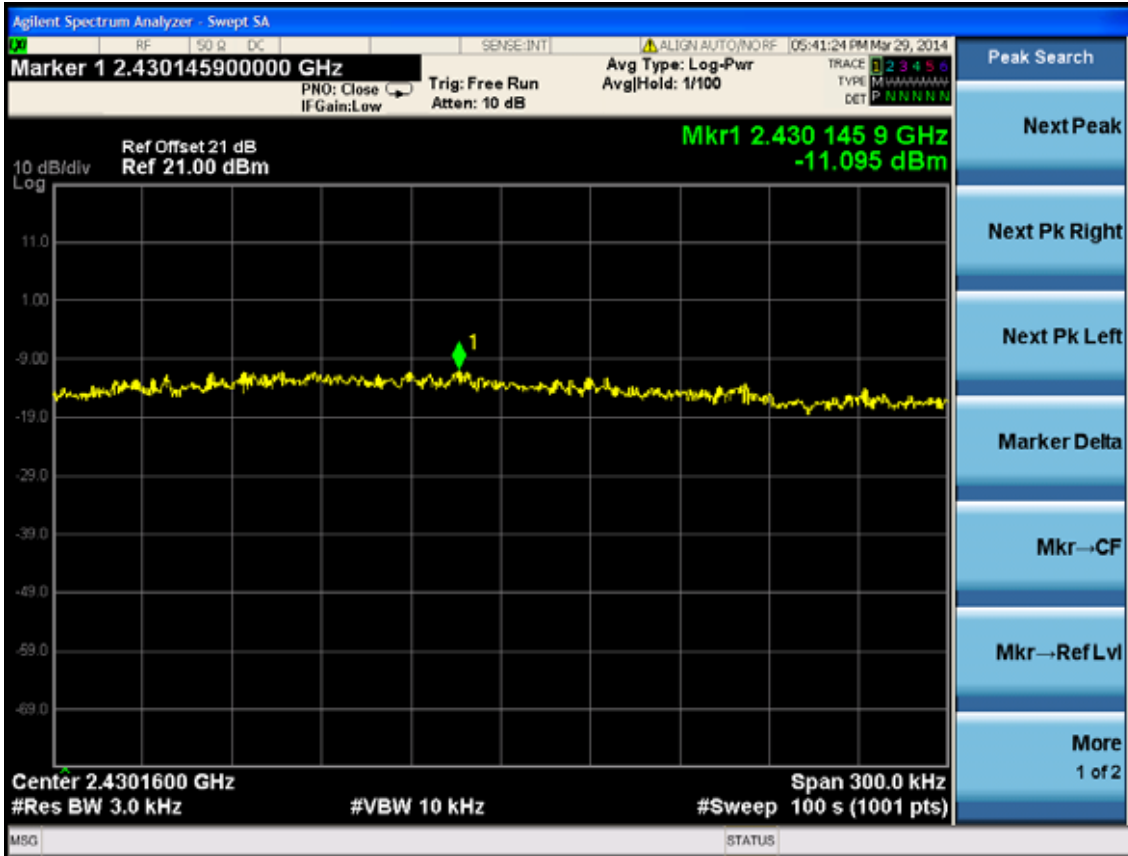




40MHz Antenna: J2
Test Mode: IEEE 11nHT40

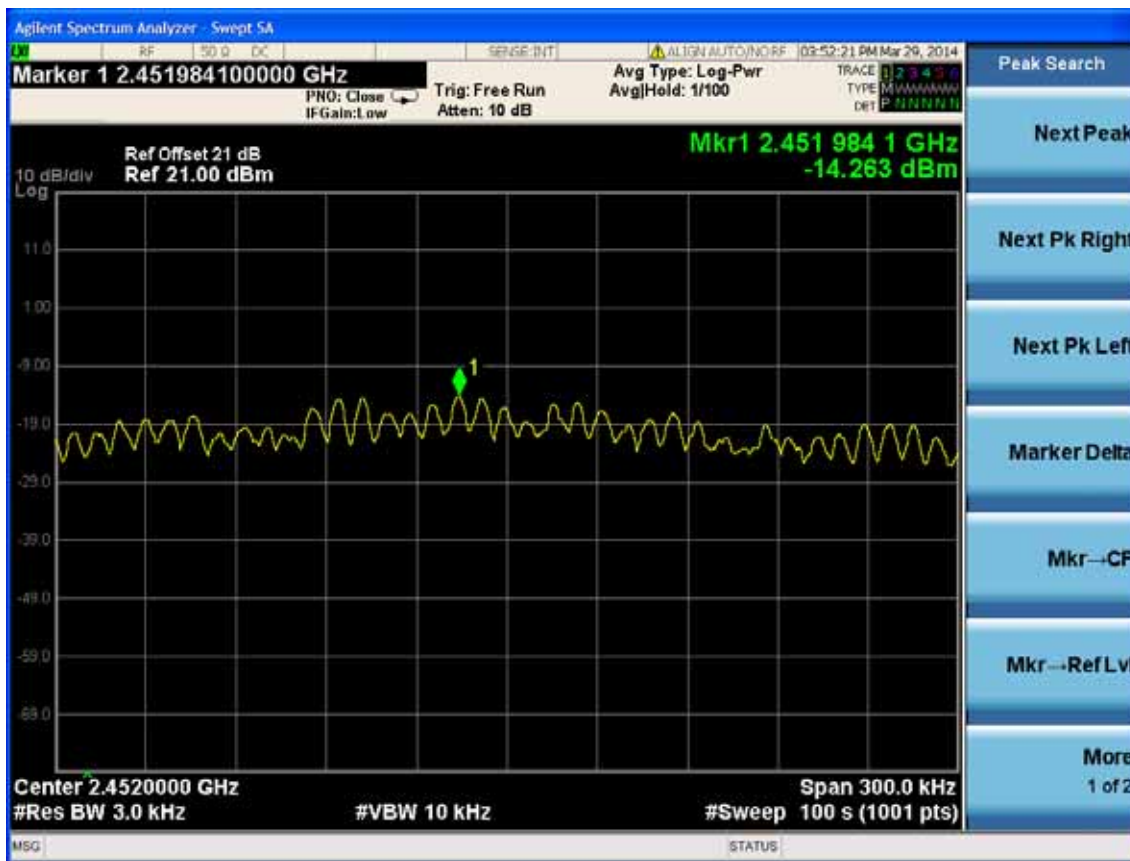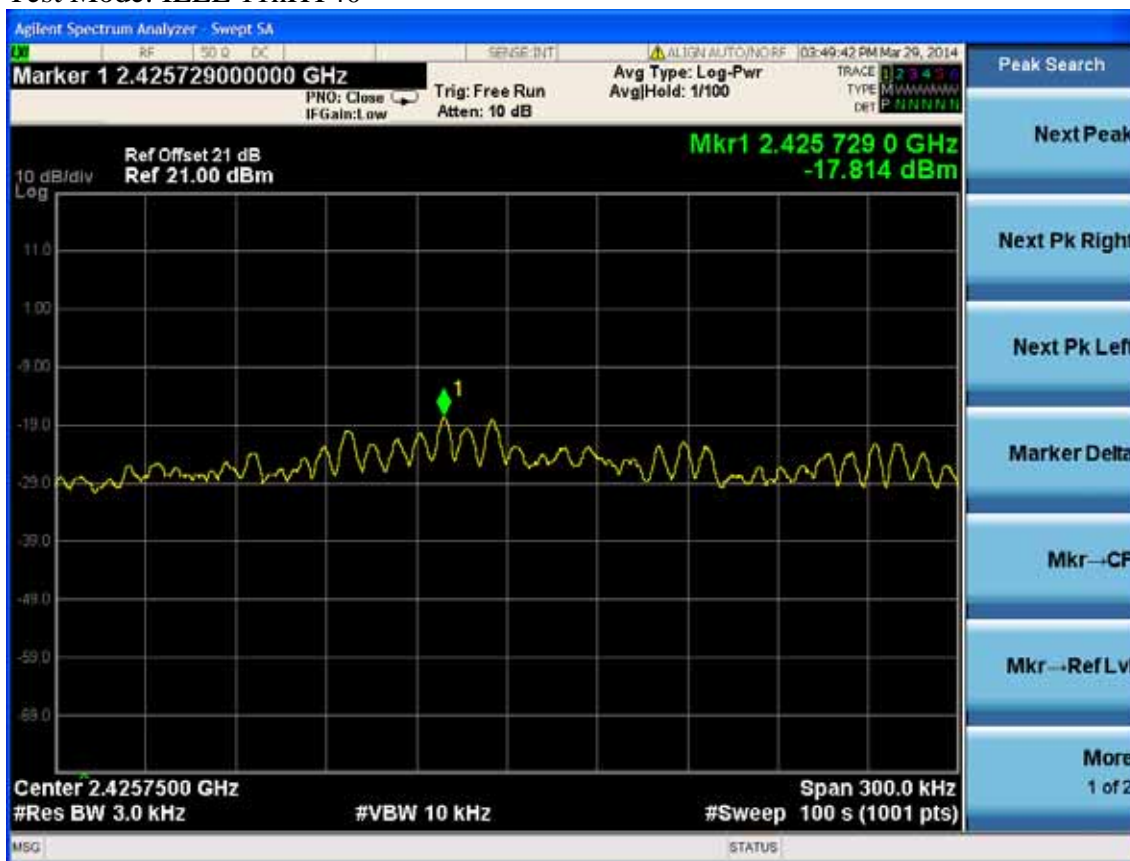

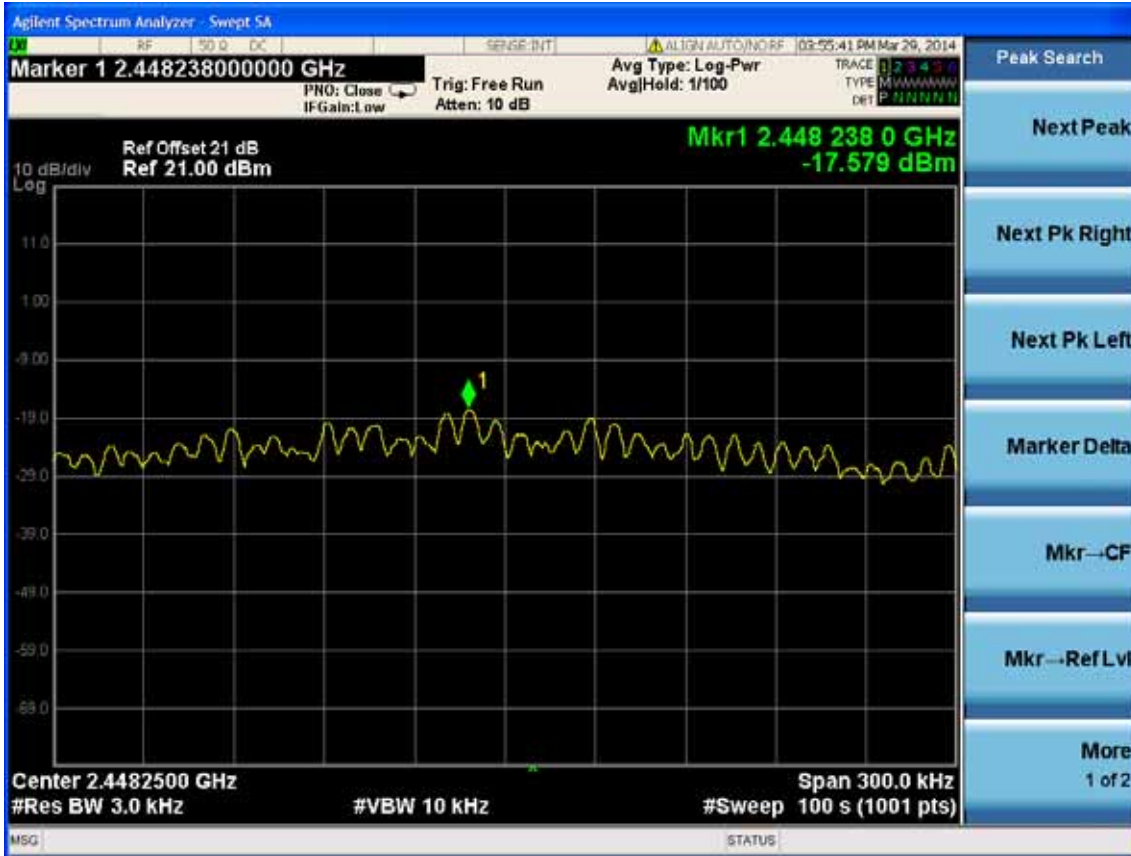

40MHz Antenna: J3
Test Mode: IEEE 11nHT40

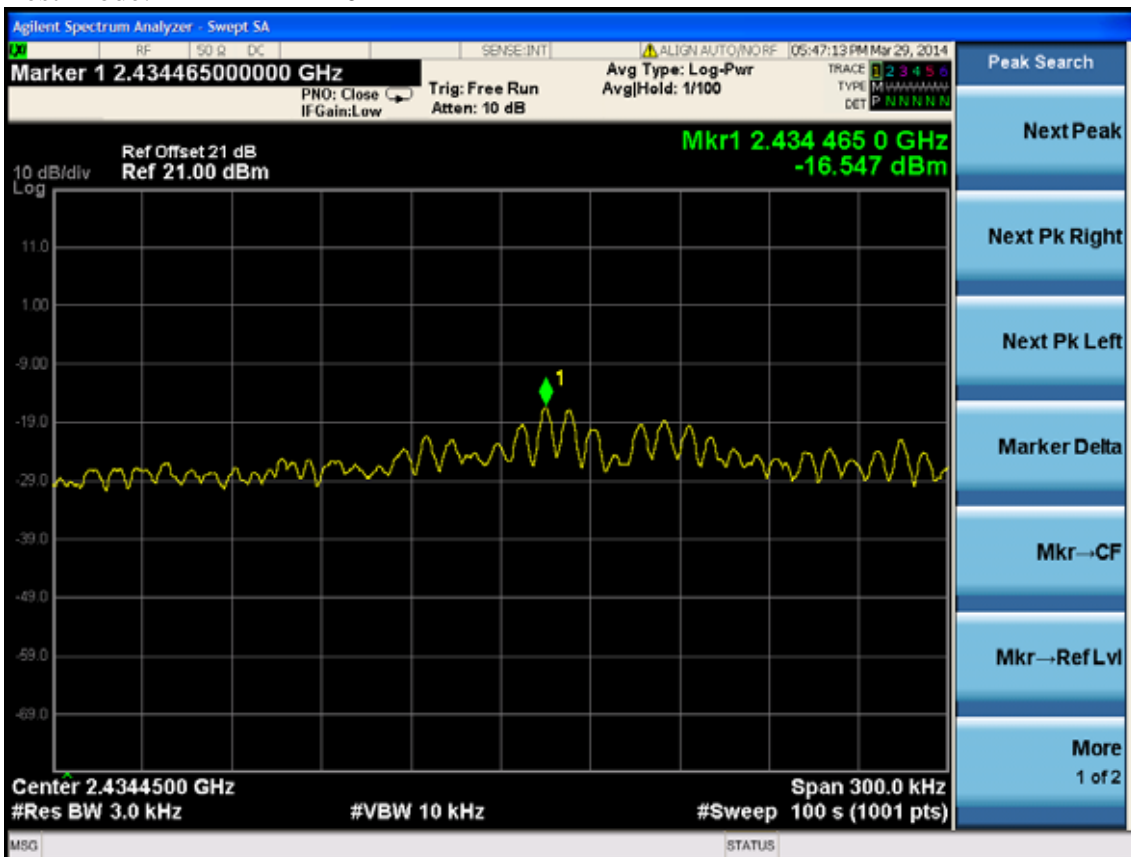

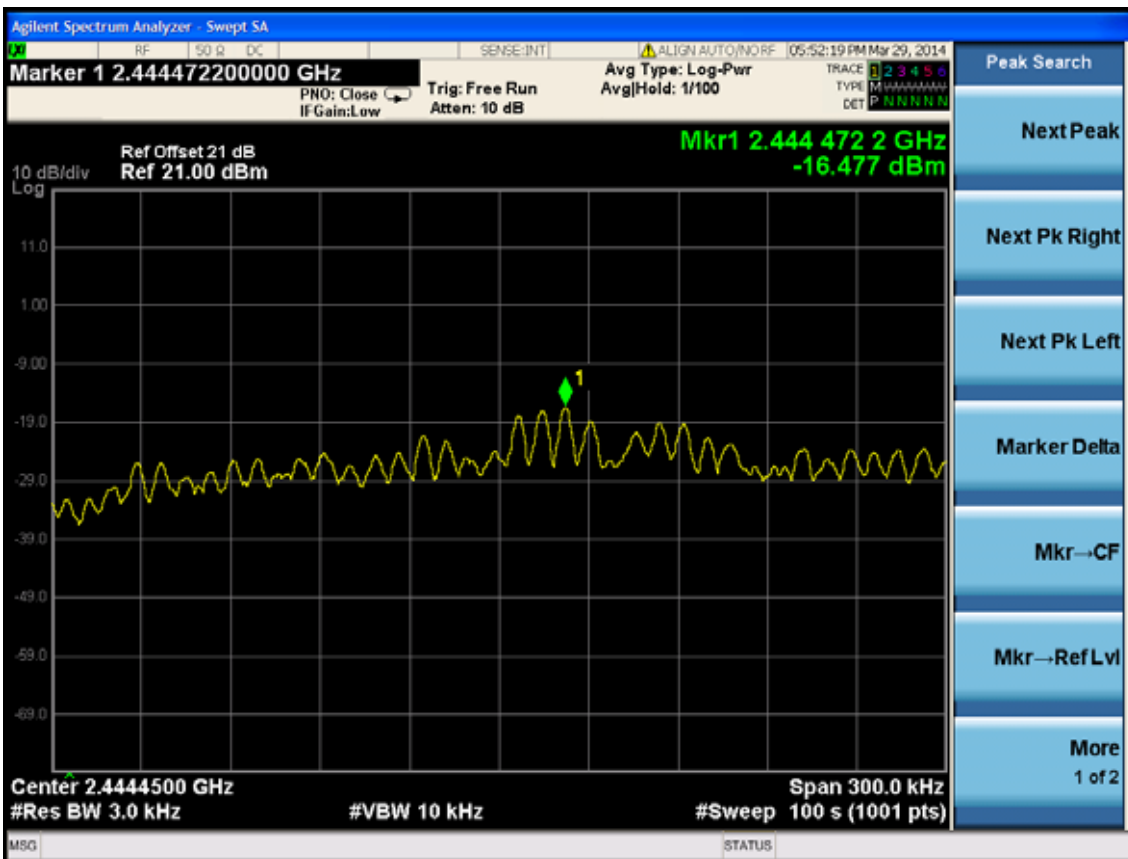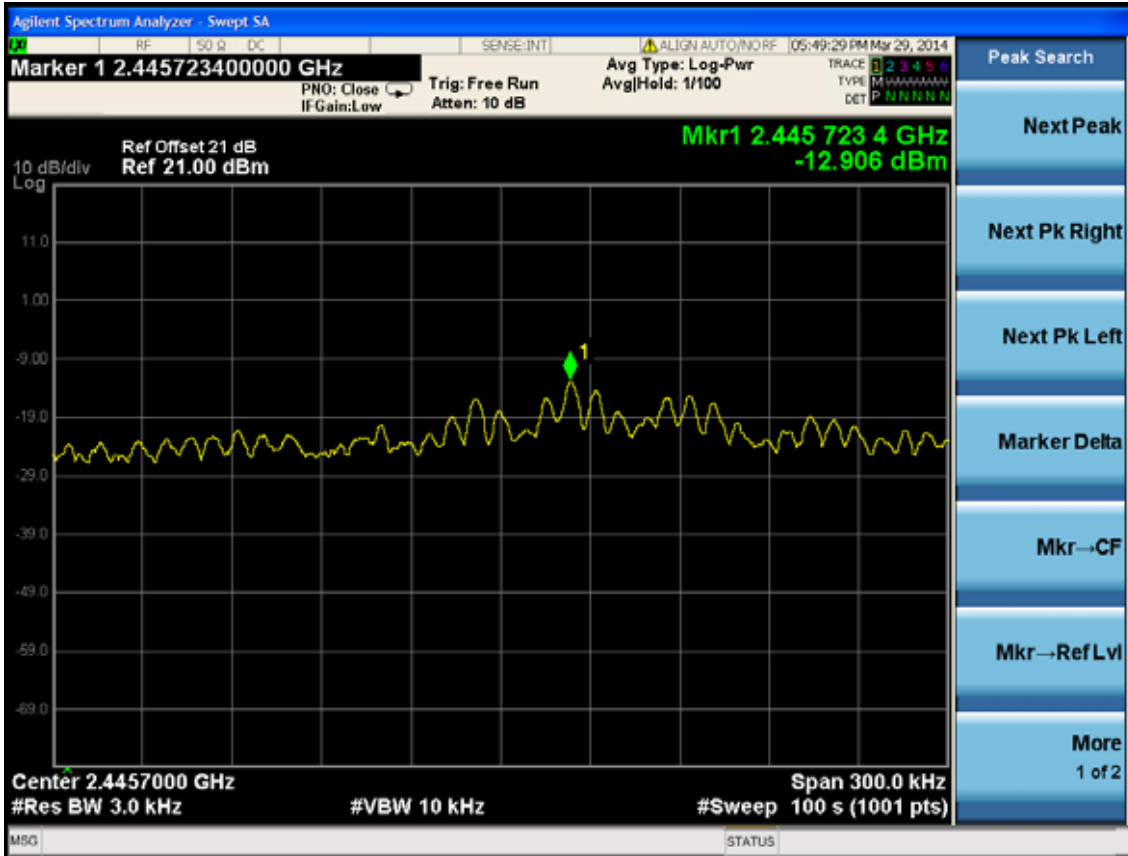

10.MPE ESTIMATION

10.1.Limit for General Population/ Uncontrolled Exposures

Frequency	Power density (mW/ cm ²)	Averaging time(minutes)
300MHz----1.5GHz	F/1500	30
1.5GHz---100GHz	1.0	30

Frequency(MHz)	Power density (mW/ cm ²)	Averaging time(minutes)
2412	1	30
2437	1	30
2462	1	30

Note: F= Frequency in MHz Estimation Result

5MHz

EUT: 2.4GHz 300Mbps 9dBi Outdoor CPE		
M/N: CPE210		
Test date: 2014-04-01	Pressure: 101.3 ± 1.0 kpa	Humidity: 52.3 ± 3.0%
Tested by: Leo-Li	Test site: RF site	Temperature: 21.9 ± 0.6

Cable loss: 1 dB		Attenuator loss: 20 dB				Antenna Gain: 9dBi	
Test Mode	CH	Frequency (MHz)	Peak Output Power (dBm)	Output Power (mW)	Antenna Gain (dBi)	Antenna Gain (Linear)	MPE
11b	CH1	2412	27.36	544.50	9	7.94	0.8609
	CH6	2437	27.43	553.35	9	7.94	0.8749
	CH11	2462	26.91	490.91	9	7.94	0.7762
11g	CH1	2412	27.22	527.23	9	7.94	0.8336
	CH6	2437	27.20	524.81	9	7.94	0.8298
	CH11	2462	27.40	549.54	9	7.94	0.8689
11n HT20	CH1	2412	27.60	575.44	9	7.94	0.9098
	CH6	2437	27.46	557.19	9	7.94	0.8809
	CH11	2462	27.29	535.80	9	7.94	0.8471

10MHz

EUT: 2.4GHz 300Mbps 9dBi Outdoor CPE		
M/N: CPE210		
Test date: 2014-04-01	Pressure: 101.3 ± 1.0 kpa	Humidity: 52.6 ± 3.0%
Tested by: Leo-Li	Test site: RF site	Temperature: 22.4 ± 0.6

Cable loss: 1 dB		Attenuator loss: 20 dB				Antenna Gain: 9dBi	
Test Mode	CH	Frequency (MHz)	Peak Output Power (dBm)	Output Power (mW)	Antenna Gain (dBi)	Antenna Gain (Linear)	MPE
11b	CH1	2412	27.31	538.27	9	7.94	0.8510
	CH6	2437	27.68	586.14	9	7.94	0.9267
	CH11	2462	27.55	568.85	9	7.94	0.8994
11g	CH1	2412	27.24	529.66	9	7.94	0.8374
	CH6	2437	27.39	548.28	9	7.94	0.8669
	CH11	2462	27.30	537.03	9	7.94	0.8491
11n HT20	CH1	2412	27.43	553.35	9	7.94	0.8749
	CH6	2437	27.49	561.05	9	7.94	0.8871
	CH11	2462	27.47	558.47	9	7.94	0.8830

20MHz

EUT: 2.4GHz 300Mbps 9dBi Outdoor CPE		
M/N: CPE210		
Test date: 2014-3-25	Pressure: 101.3 ± 1.0kpa	Humidity: 52.2 ± 3.0%
Tested by: Leo-Li	Test site: RF site	Temperature: 21.4 ± 0.6

Cable loss: 1 dB		Attenuator loss: 20 dB				Antenna Gain: 9dBi	
Test Mode	CH	Frequency (MHz)	Peak Output Power (dBm)	Output Power (mW)	Antenna Gain (dBi)	Antenna Gain (Linear)	MPE
11b	CH1	2412	27.75	595.66	9	7.94	0.9418
	CH6	2437	27.50	562.34	9	7.94	0.8891
	CH11	2462	27.33	540.75	9	7.94	0.8550
11g	CH1	2412	27.93	620.87	9	7.94	0.9816
	CH6	2437	27.79	601.17	9	7.94	0.9505
	CH11	2462	27.91	618.02	9	7.94	0.9771
11n HT20	CH1	2412	25.70	371.54	9	7.94	0.5874
	CH6	2437	27.80	602.56	9	7.94	0.9527
	CH11	2462	25.61	363.92	9	7.94	0.5754

40MHz

EUT: 2.4GHz 300Mbps 9dBi Outdoor CPE		
M/N: CPE210		
Test date: 2014-3-25	Pressure: 101.3 ± 1.0 kpa	Humidity: 52.2 ± 3.0%
Tested by: Leo-Li	Test site: RF site	Temperature: 21.4 ± 0.6

Cable loss: 1 dB		Attenuator loss: 20 dB				Antenna Gain: 9dBi	
Test Mode	CH	Frequency (MHz)	Peak Output Power (dBm)	Output Power (mW)	Antenna Gain (dBi)	Antenna Gain (Linear)	MPE
11n HT40	CH1	2422	25.29	338.06	9	7.94	0.5345
	CH4	2437	27.95	623.73	9	7.94	0.9862
	CH7	2452	24.41	276.06	9	7.94	0.4365

11. ANTENNA REQUIREMENT

11.1. STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2. ANTENNA CONNECTED CONSTRUCTION

The antennas used for this product are Horizontal & Vertical antenna that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 9dBi.

12.DEVIATION TO TEST SPECIFICATIONS

[NONE]