

FCC PART 15C TEST REPORT FOR CERTIFICATION
On Behalf of

TP-LINK TECHNOLOGIES CO., LTD.

2.4GHz 300Mbps 9dBi Outdoor CPE

Model No.: CPE210

FCC ID: TE7CPE210

Prepared for : TP-LINK TECHNOLOGIES CO., LTD.
Building 24(floors 1,3,4,5) and 28 (floors1-4) Central Science
and Technology Park, Shennan Rd, Nanshan, Shenzhen, China

Prepared By : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Ke Feng Rd., 52 Block,
Shenzhen Science & Industrial Park,
Nantou, Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F14082
Date of Test : Jan.23 ~ 29, 2015
Date of Report : Feb.06, 2015

TABLE OF CONTENTS

Description	Page
1. SUMMARY OF STANDARDS AND RESULTS	1-2
1.1. Description of Standards and Results	1-2
2. GENERAL INFORMATION	2-1
2.1. Description of Device (EUT)	2-1
2.2. Test Information	2-2
2.3. Tested Supporting System Details	2-2
2.4. Block Diagram of Test Setup	2-2
2.5. Test Facility	2-3
2.6. Measurement Uncertainty (95% confidence levels, k=2).....	2-3
3. POWER LINE CONDUCTED EMISSION TEST.....	3-1
3.1. Test Equipments	3-1
3.2. Block Diagram of Test Setup	3-1
3.3. Power Line Conducted Emission Test Limits	3-1
3.4. Configuration of EUT on Test.....	3-1
3.5. Operating Condition of EUT	3-2
3.6. Test Procedure	3-2
3.7. Power Line Conducted Emission Test Results	3-2
4. RADIATED EMISSION TEST	4-1
4.1. Test Equipment.....	4-1
4.2. Block Diagram of Test Setup	4-2
4.3. Radiated Emission Limit	4-3
4.4. EUT Configuration on Test	4-3
4.5. Operating Condition of EUT	4-3
4.6. Test Procedure	4-4
4.7. Radiated Emission Test Results	4-4
5. BAND EDGE COMPLIANCE TEST	5-1
5.1. Test Equipment.....	5-1
5.2. Limit	5-1
5.3. Test Produce	5-1
5.4. Test Results	5-1
6. OUTPUT POWER TEST	6-1
6.1. Test Equipment.....	6-1
6.2. Limit (FCC Part 15C 15.247 b(3)).....	6-1
6.3. Test Procedure	6-1
6.4. Test Results	6-2
7. MPE ESTIMATION	7-1
7.1. Limit for General Population/ Uncontrolled Exposures	7-1
7.2. Estimation Result.....	7-1
8. ANTENNA REQUIREMENT	8-1
8.1. STANDARD APPLICABLE	8-1
8.2. ANTENNA CONNECTED CONSTRUCTION	8-1
9. DEVIATION TO TEST SPECIFICATIONS	9-1
10. PHOTOGRAPH OF TEST.....	10-1
10.1. Photos of Power Line Conducted Emission Test	10-1
10.2. Photos of Radiated Emission Test	10-2
11. PHOTOS OF THE EUT	11-1

TEST REPORT CERTIFICATION

Applicant : TP-LINK TECHNOLOGIES CO., LTD.
Manufacturer : TP-LINK TECHNOLOGIES CO., LTD.
EUT Description : 2.4GHz 300Mbps 9dBi Outdoor CPE
FCC ID : TE7CPE210
(A) MODEL NO. : CPE210
(B) SERIAL NO. : N/A
(C) POWER SUPPLY : 100-240V, 50/60Hz
(D) TEST VOLTAGE : DC 24V From POE Input AC 120V/60Hz

Tested for comply with:
FCC Rules and Regulations Part 15 Subpart C: 2013

Test procedure used:
ANSI C63.10:2009

The device described above is tested by AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. to confirm comply with all the FCC Part 15 Subpart C requirements. The test results are contained in this test report and AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. is assumed full responsibility for the accuracy and completeness of these tests. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC and IC requirements. This report contains data that are not covered by the NVLAP accreditation.

This Report is made under FCC Part 2.1075. No modifications were required during testing to bring this product into compliance.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Date of Test : Jan.23 ~ 29, 2015 Report of date: Feb.06, 2015

Prepared by : April Tseng Reviewed by : Sunny Lu
April Tseng / Assistant Sunny Lu / Assistant Manager

AUDIX[®] 信華科技(深圳)有限公司
Audix Technology (Shenzhen) Co., Ltd.
EMC 部門報告專用章
Stamp only for EMC Dept. Report
Signature: David Jin 2.6

Approved & Authorized Signer : David Jin
David Jin / Manager

Modified History

Edition No	Summary	Date of Rev.	Report No.
0	Original Report.	Oct.16, 2014	ACS-F14082
Rev.1	Change the component of CPU	Feb.06, 2015	ACS-F15082-1

Remark:

1. This report is an additional version with original report number ACS-F14082. the different with original report are See the above table of Rev.1.
2. Through evaluation of the above difference, power , bandedge, radiated emission needed to be re-evaluated. The test data were recorded in this report.
3. This report is based on report of ACS-F14082.
4. Judge from the test result, this is belong to class I permissive change, no need to re-submit

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Power Line Conducted Emission	FCC Part 15: 15.207 ANSI C63.10: 2009	PASS
Radiated Emission	FCC Part 15: 15.209 ANSI C63.10: 2009	PASS
Band Edge Compliance	FCC Part 15: 15.247 ANSI C63.10: 2009	PASS
Conducted spurious emissions	FCC Part 15: 15.247 ANSI C63.10: 2009	PASS
6dB Bandwidth	FCC Part 15: 15.247 ANSI C63.10: 2009	PASS
Peak Output Power	FCC Part 15: 15.247 ANSI C63.10: 2009	PASS
Power Spectral Density	FCC Part 15: 15.247 ANSI C63.10: 2009	PASS
Antenna requirement	FCC Part 15: 15.203	PASS

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Product Name	: 2.4GHz 300Mbps 9dBi Outdoor CPE
Model Number	: CPE210
FCC ID	: TE7CPE210
Operation Frequency	: IEEE 802.11b: 2412MHz—2462MHz IEEE 802.11g: 2412MHz—2462MHz IEEE 802.11n HT20: 2412MHz—2462MHz IEEE 802.11n HT40: 2422MHz—2452MHz
Channel Number	: IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7Channels
Modulation Technology	: IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20, HT40: OFDM (64QAM, 16QAM, QPSK,BPSK)
Antenna Assembly Gain	: Antenna Type: Directional Antenna Antenna Gain: 9dBi 3dB beamwidth: Horizontal 65°, Vertical 35°
Applicant	: TP-LINK TECHNOLOGIES CO., LTD. Building 24(floors 1,3,4,5) and 28 (floors1-4) Central Science and Technology Park, Shennan Rd, Nanshan, Shenzhen, China
Manufacturer	: TP-LINK TECHNOLOGIES CO., LTD. Building 24(floors 1,3,4,5) and 28 (floors1-4) Central Science and Technology Park, Shennan Rd, Nanshan, Shenzhen, China
Power Adapter	: Manufacturer: TP-LINK; M/N: T240100-2-POE AC Cable: Unshielded, Detachable, 2.3m
Date of Test	: Jan.23 ~ 29, 2015
Date of Receipt	: Jan.21, 2015
Sample Type	: Prototype production

2.2. Test Information

A special test software was used to control EUT work in Continuous TX mode(100% duty cycle), and select test channel, wireless mode and data rate.


Tested mode, channel, and data rate information			
Mode	data rate (Mbps)(see Note)	Channel	Frequency (MHz)
IEEE 802.11b	11	Low :CH1	2412
	11	Middle: CH6	2437
	11	High: CH11	2462
IEEE 802.11g	54	Low :CH1	2412
	54	Middle: CH6	2437
	54	High: CH11	2462
IEEE 802.11n HT20	6.5	Low :CH1	2412
	6.5	Middle: CH6	2437
	6.5	High: CH11	2462
IEEE 802.11n HT40	13.5	Low :CH1	2422
	13.5	Middle: CH4	2437
	13.5	High: CH7	2452

Note 1: According exploratory test, EUT will have maximum PK output power in those data rate, so those data rate were used for all test.
 Note 2: This device has J2 and J3 two antenna, and use CDD Mode two Antenna can transmit at the same time.
 Note 3: This device has 5MHz , 10MHz, 20MHz and 40MHz Bandwidth.

2.3. Tested Supporting System Details

No.	Description	ACS No.	Manufacturer	Model	Serial Number	Approved type
1	Personal Computer	Test PC P	DELL	Studio 540	124XK2X	<input checked="" type="checkbox"/> FCC DoC <input checked="" type="checkbox"/> BSMI ID:R33002
		Power Cord: Unshielded, Detachable, 1.8m Display Card: HD3450 (DVI+VGA+HDMI)				

2.4. Block Diagram of Test Setup

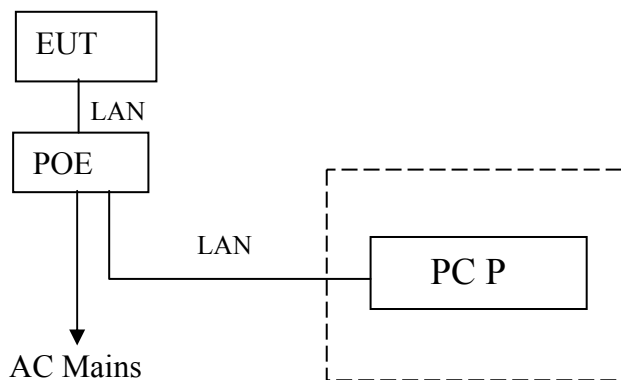

(EUT: 2.4GHz 300Mbps 9dBi Outdoor CPE)

2.5. Test Facility

Site Description

Name of Firm : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Ke Feng Rd., 52 Block, Shenzhen
Science & Industrial Park, Nantou,
Shenzhen, Guangdong, China

3m Anechoic Chamber : Certificated by FCC, USA
Registration Number: 90454
Valid Date: Feb.22, 2015

3m & 10m Anechoic Chamber : Certificated by FCC, USA
Registration Number: 794232
Valid Date: Oct.31, 2015

EMC Lab. : Certificated by Industry Canada
Registration Number: IC 5183A-1
Valid Date: Jun.13, 2014

: Certificated by DAkkS, Germany
Registration No: D-PL-12151-01-00
Valid Date: Dec.15, 2016

Accredited by NVLAP, USA
NVLAP Code: 200372-0
Valid Date: Mar.31, 2015

2.6. Measurement Uncertainty (95% confidence levels, k=2)


Test Item	Uncertainty
Uncertainty for Conduction emission test in No. 1 Conduction	3.10 dB(150kHz to 30MHz)
Uncertainty for Radiation Emission test in 3m chamber	3.22 dB(30~200MHz, Polarize: H)
	3.23 dB(30~200MHz, Polarize: V)
	3.49 dB(200M~1GHz, Polarize: H)
	3.39 dB(200M~1GHz, Polarize: V)
Uncertainty for Radiation Emission test in 3m chamber (1GHz-18GHz)	4.97 dB (Distance: 3m Polarize: V)
	4.99 dB (Distance: 3m Polarize: H)
Uncertainty for Radiated Spurious Emission test in RF chamber	3.57 dB
Uncertainty for Conduction Spurious emission test	2.00 dB
Uncertainty for Output power test	0.73 dB
Uncertainty for Power density test	2.00 dB
Uncertainty for Frequency range test	7×10^{-8}
Uncertainty for Bandwidth test	83 kHz
Uncertainty for DC power test	0.038 %
Uncertainty for test site temperature and humidity	0.6°C
	3%

3. POWER LINE CONDUCTED EMISSION TEST

3.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	1# Shielding Room	AUDIX	N/A	N/A	Apr.17,14	1 Year
2.	Test Receiver	Rohde & Schwarz	ESHS10	838693/001	Oct.29, 14	1 Year
3.	L.I.S.N.#1	Rohde & Schwarz	ESH2-Z5	100429	Oct.29, 14	1 Year
4.	L.I.S.N.#3	Kyoritsu	KNW-242C	8-1920-1	Apr. 28,14	1 Year
5.	Terminator	Hubersuhner	50Ω	No. 1	Apr. 28,14	1 Year
6.	Terminator	Hubersuhner	50Ω	No. 2	Apr. 28,14	1 Year
7.	RF Cable	Hubersuhner	RG58	0100.6954.20#	Oct.29, 14	1Year
8.	Coaxial Switch	Anritsu	MP59B	6200298346	Apr. 28,14	1 Year
9.	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	101838	Oct.29, 14	1 Year

3.2. Block Diagram of Test Setup

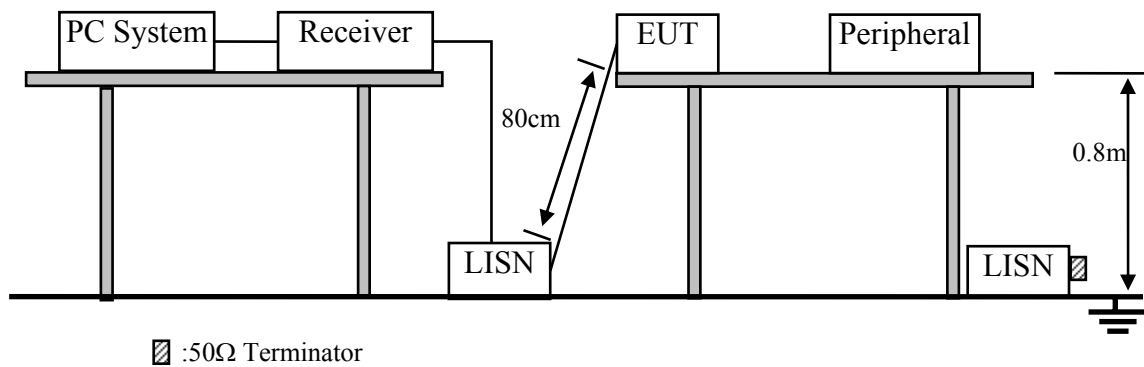

3.3. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.
 2. The lower limit shall apply at the transition frequencies.

3.4. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

3.4.1. 2.4GHz 300Mbps 9dBi Outdoor CPE (EUT)

Model Number : CPE210
 Serial Number : N/A

3.4.2. Support Equipment: As Tested Supporting System Details, in Section 2.2.

3.5. Operating Condition of EUT

- 3.5.1. Setup the EUT and simulator as shown as Section 3.2.
- 3.5.2. Turned on the power of all equipment.
- 3.5.3. PC run test software to control EUT work in Tx mode.

3.6. Test Procedure

The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2009 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESHS10) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.7. Power Line Conducted Emission Test Results


PASS. (All emissions not reported below are too low against the prescribed limits.)

5M Bandwidth

Data: 2

File: E:\2015 Report Data\T\TP-LINK\ACS14Q2057.EM6 (6)

Date: 2015-01-29

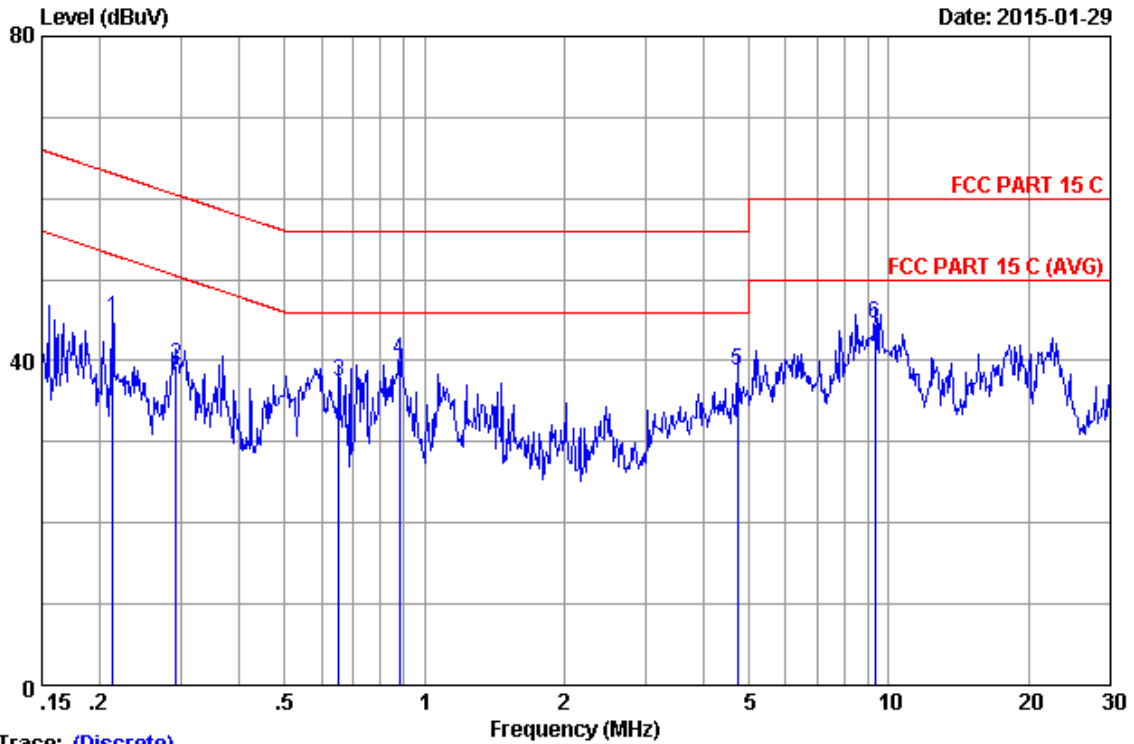


Trace: (Discrete)

Site no :1#conduction Data No :2
 Dis./Ant. :2014 ESH2-Z5 LINE
 Limit :FCC PART 15 C
 Env./Ins. :23.1*C/50% Engineer :Alice-Yang
 EUT :2.4GHz 300Mbps 9dBi Outdoor CPE
 Power Rating :DC 24V From Adapter Input AC 120V/60Hz
 Test Mode :Tx Mode
 M/N:CPE210

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.21279	0.13	9.90	35.18	45.21	63.10	17.89	QP
2	0.29243	0.13	9.90	29.45	39.48	60.46	20.98	QP
3	0.65430	0.14	9.91	27.45	37.50	56.00	18.50	QP
4	0.88499	0.16	9.91	29.98	40.05	56.00	15.95	QP
5	4.721	0.24	9.97	28.67	38.88	56.00	17.12	QP
6	9.352	0.26	10.01	34.24	44.51	60.00	15.49	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss(Include 10dB pulse limit)+Reading.
 2.If the average limit is met when using a quasi-peak detector. the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

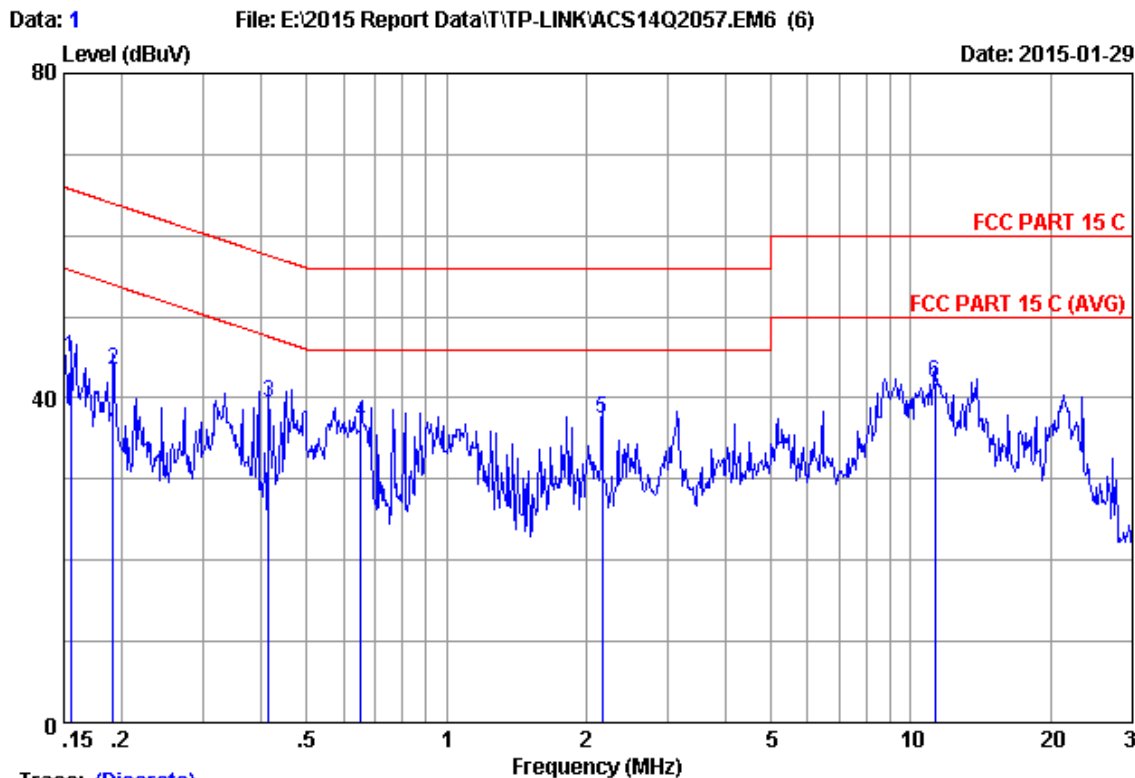


Trace: (Discrete)

Site no :1#conduction Data No :1
 Dis./Ant. :2014 ESH2-Z5 NEUTRAL
 Limit :FCC PART 15 C
 Env./Ins. :23.1°C/50% Engineer :Alice-Yang
 EUT :2.4GHz 300Mbps 9dBi Outdoor CPE
 Power Rating :DC 24V From Adapter Input AC 120V/60Hz
 Test Mode :Tx Mode
 M/N:CPE210

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.15485	0.13	9.89	35.07	45.09	65.74	20.65	QP
2	0.19140	0.13	9.90	33.52	43.55	63.98	20.43	QP
3	0.41485	0.15	9.90	29.39	39.44	57.55	18.11	QP
4	0.65430	0.16	9.91	26.83	36.90	56.00	19.10	QP
5	2.167	0.21	9.93	27.34	37.48	56.00	18.52	QP
6	11.257	0.39	10.02	31.43	41.84	60.00	18.16	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss(Include 10dB pulse limit)+Reading.
 2.If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

10M Bandwidth

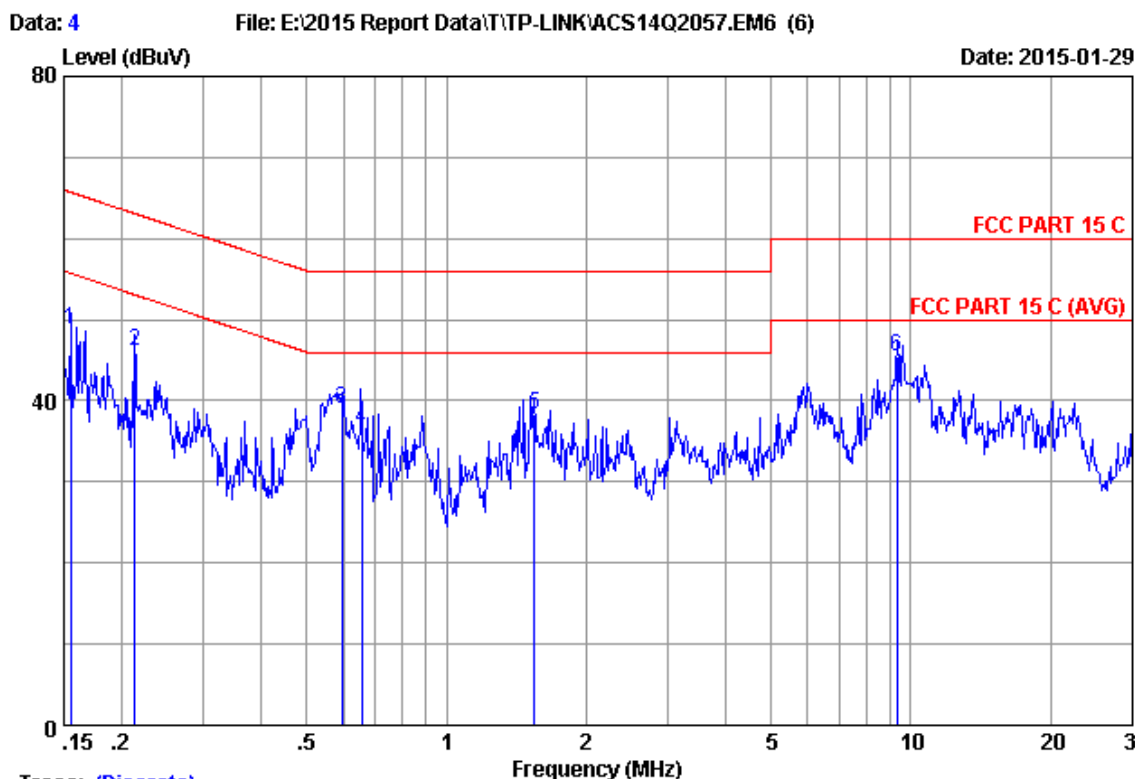


Trace: (Discrete)

```

Site no      :1#conduction           Data No   : 4
Dis./Ant.    :2014 ESH2-25 LINE
Limit        :FCC PART 15 C
Env./Ins.    :23.1*C/50%           Engineer  :Alice-Yang
EUT          :2.4GHz 300Mbps 9dBi Outdoor CPE
Power Rating :DC 24V From Adapter Input AC 120V/60Hz
Test Mode    :Tx Mode
M/N:CPE210
    
```

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBUV)	Emission Level (dBUV)	Limits (dBUV)	Margin (dB)	Remark
1	0.15485	0.14	9.89	38.70	48.73	65.74	17.01	QP
2	0.21279	0.13	9.90	36.18	46.21	63.10	16.89	QP
3	0.59478	0.15	9.91	28.96	39.02	56.00	16.98	QP
4	0.65778	0.14	9.91	26.44	36.49	56.00	19.51	QP
5	1.544	0.18	9.92	28.31	38.41	56.00	17.59	QP
6	9.352	0.26	10.01	35.24	45.51	60.00	14.49	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss(Include 10dB pulse limit)+Reading.
 2.If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

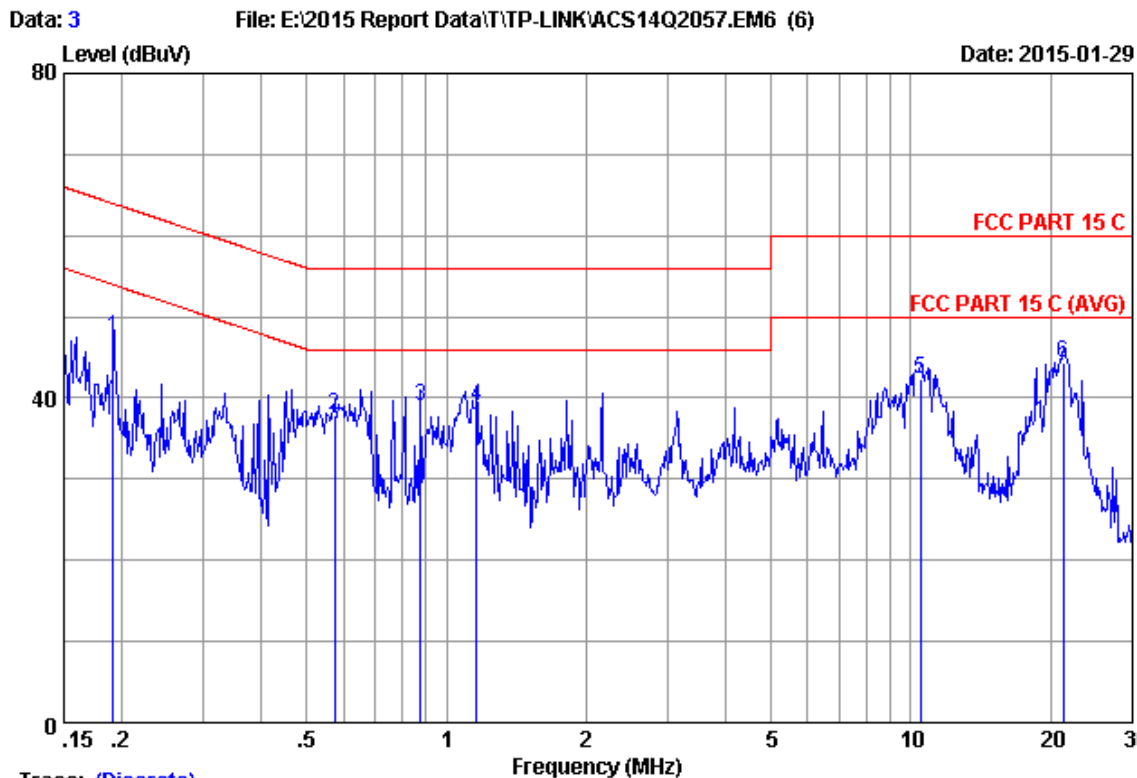

Trace: (Discrete)


Site no	:1#conduction	Data No	:3
Dis./Ant.	:2014 ESH2-Z5 NEUTRAL		
Limit	:FCC PART 15 C		
Env./Ins.	:23.1°C/50%	Engineer	:Alice-Yang
EUT	:2.4GHz 300Mbps 9dBi Outdoor CPE		
Power Rating	:DC 24V From Adapter Input AC 120V/60Hz		
Test Mode	:Tx Mode		
	M/N:CPE210		

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.19140	0.13	9.90	37.52	47.55	63.98	16.43	QP
2	0.57313	0.16	9.90	27.80	37.86	56.00	18.14	QP
3	0.88031	0.18	9.91	28.96	39.05	56.00	16.95	QP
4	1.160	0.18	9.91	28.83	38.92	56.00	17.08	QP
5	10.508	0.35	10.02	31.86	42.23	60.00	17.77	QP
6	21.260	0.76	10.12	33.47	44.35	60.00	15.65	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss(Include 10dB pulse limit)+Reading.
 2.If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

20M Bandwidth

Data: 6 File: E:\2015 Report Data\T\TP-LINK\ACS14Q2057.EM6 (6) Date: 2015-01-29

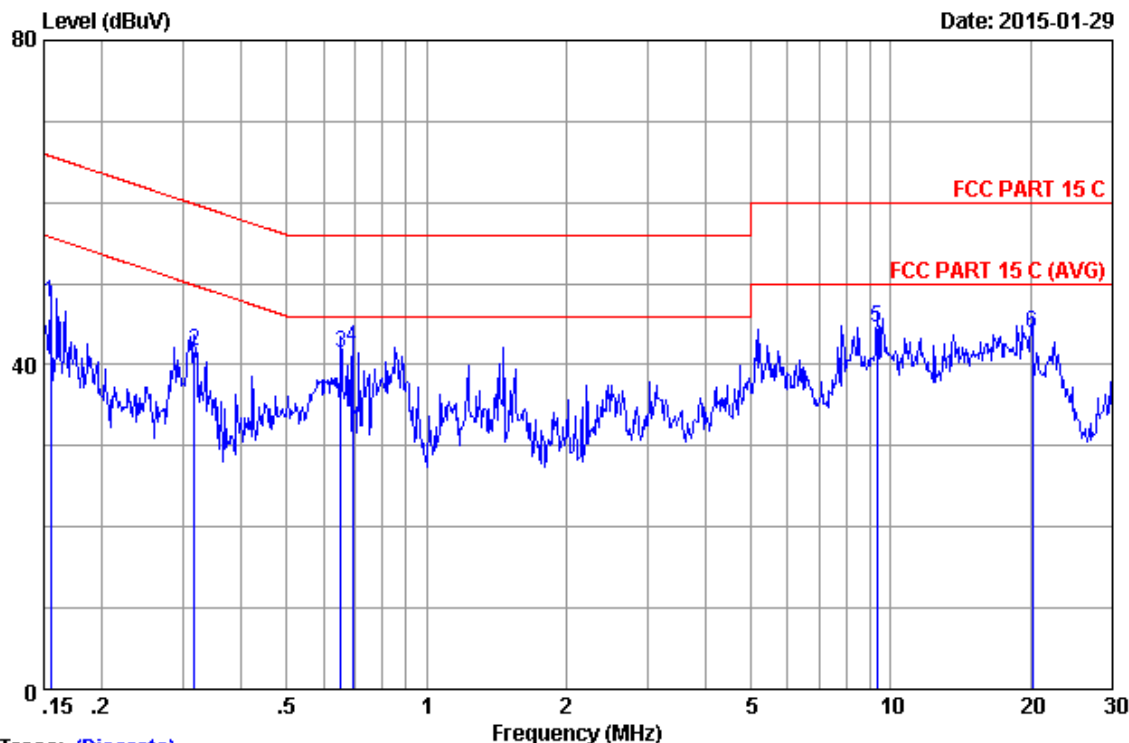


Trace: (Discrete)

Site no :1#conduction Data No :6
 Dis./Ant. :2014 ESH2-25 LINE
 Limit :FCC PART 15 C
 Env./Ins. :23.1*C/50% Engineer :Alice-Yang
 EUT :2.4GHz 300Mbps 9dBi Outdoor CPE
 Power Rating :DC 24V From Adapter Input AC 120V/60Hz
 Test Mode :Tx Mode
 M/N:CPE210

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.15485	0.14	9.89	37.70	47.73	65.74	18.01	QP
2	0.31662	0.13	9.90	31.60	41.63	59.80	18.17	QP
3	0.65430	0.14	9.91	31.45	41.50	56.00	14.50	QP
4	0.69357	0.14	9.91	32.03	42.08	56.00	13.92	QP
5	9.352	0.26	10.01	34.24	44.51	60.00	15.49	QP
6	20.162	0.68	10.11	33.07	43.86	60.00	16.14	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss(Include 10dB pulse limit)+Reading.
 2.If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

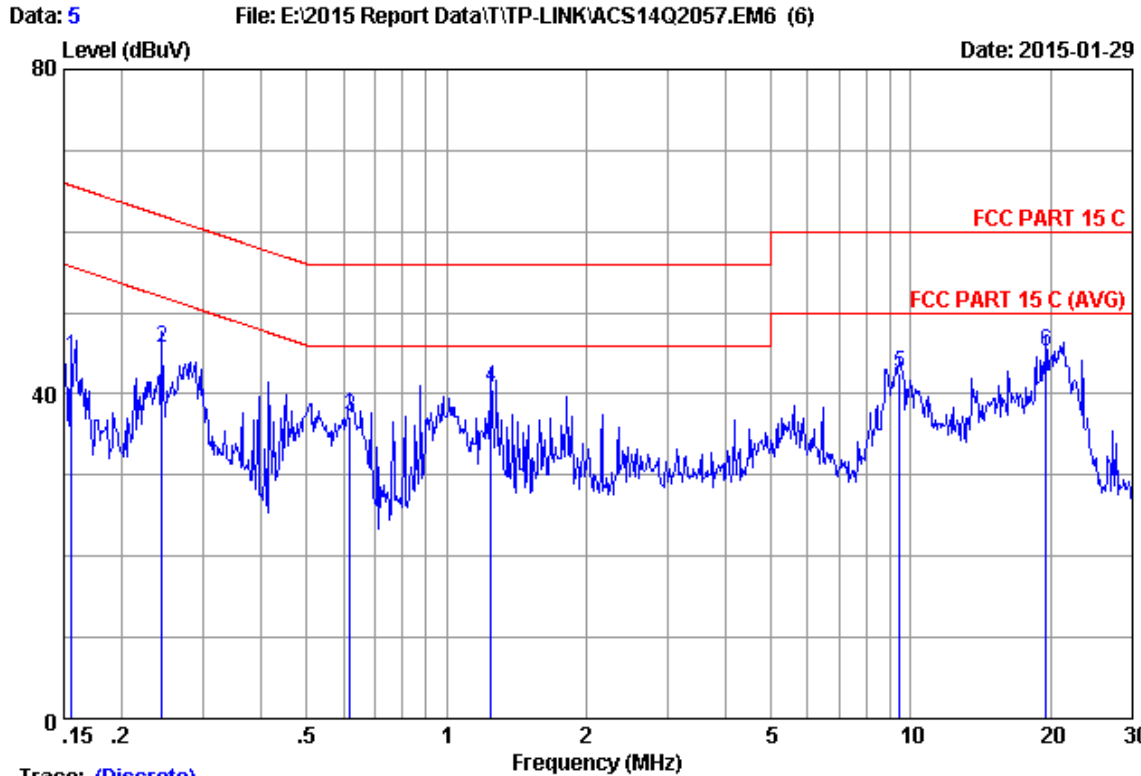

Trace: (Discrete)


Site no	:1#conduction	Data No	:5
Dis./Ant.	:2014 ESH2-Z5 NEUTRAL		
Limit	:FCC PART 15 C		
Env./Ins.	:23.1°C/50%	Engineer	:Alice-Yang
EUT	:2.4GHz 300Mbps 9dBi Outdoor CPE		
Power Rating	:DC 24V From Adapter Input AC 120V/60Hz		
Test Mode	:Tx Mode		
	M/N:CPE210		

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.15567	0.13	9.89	34.50	44.52	65.69	21.17	QP
2	0.24422	0.13	9.90	35.75	45.78	61.95	16.17	QP
3	0.62054	0.16	9.91	27.08	37.15	56.00	18.85	QP
4	1.249	0.18	9.92	30.78	40.88	56.00	15.12	QP
5	9.451	0.32	10.01	32.17	42.50	60.00	17.50	QP
6	19.532	0.74	10.11	34.37	45.22	60.00	14.78	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss(Include 10dB pulse limit)+Reading.
 2.If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

40M Bandwidth

Data: 8 File: E:\2015 Report Data\T\TP-LINK\ACS14Q2057.EM6 (8) Date: 2015-01-29

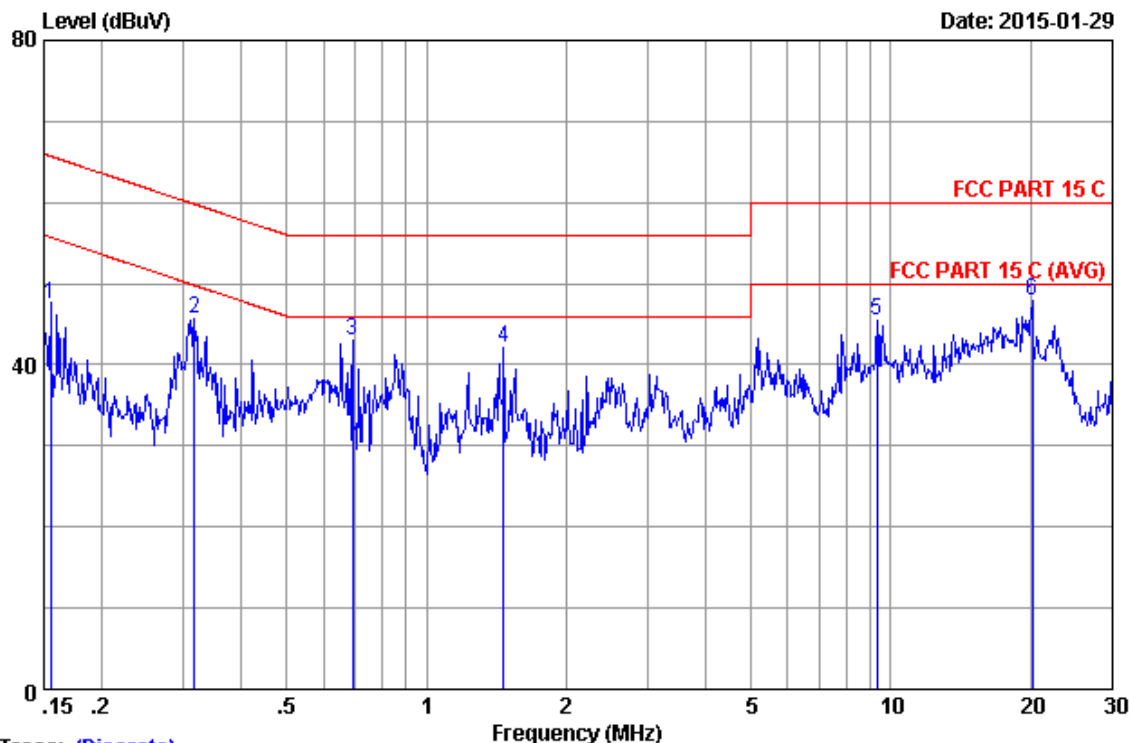


Trace: (Discrete)

Site no :1#conduction Data No :8
 Dis./Ant. :2014 ESH2-25 LINE
 Limit :FCC PART 15 C
 Env./Ins. :23.1*C/50% Engineer :Alice-Yang
 EUT :2.4GHz 300Mbps 9dBi Outdoor CPE
 Power Rating :DC 24V From Adapter Input AC 120V/60Hz
 Test Mode :Tx Mode
 M/N:CPE210

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBUV)	Emission Level (dBUV)	Limits (dBUV)	Margin (dB)	Remark
1	0.15485	0.14	9.89	37.42	47.45	65.74	18.29	QP
2	0.31662	0.13	9.90	35.60	45.63	59.80	14.17	QP
3	0.69357	0.14	9.91	33.03	43.08	56.00	12.92	QP
4	1.464	0.18	9.92	32.09	42.19	56.00	13.81	QP
5	9.352	0.26	10.01	35.24	45.51	60.00	14.49	QP
6	20.162	0.68	10.11	37.15	47.94	60.00	12.06	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss(Include 10dB pulse limit)+Reading.
 2.If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

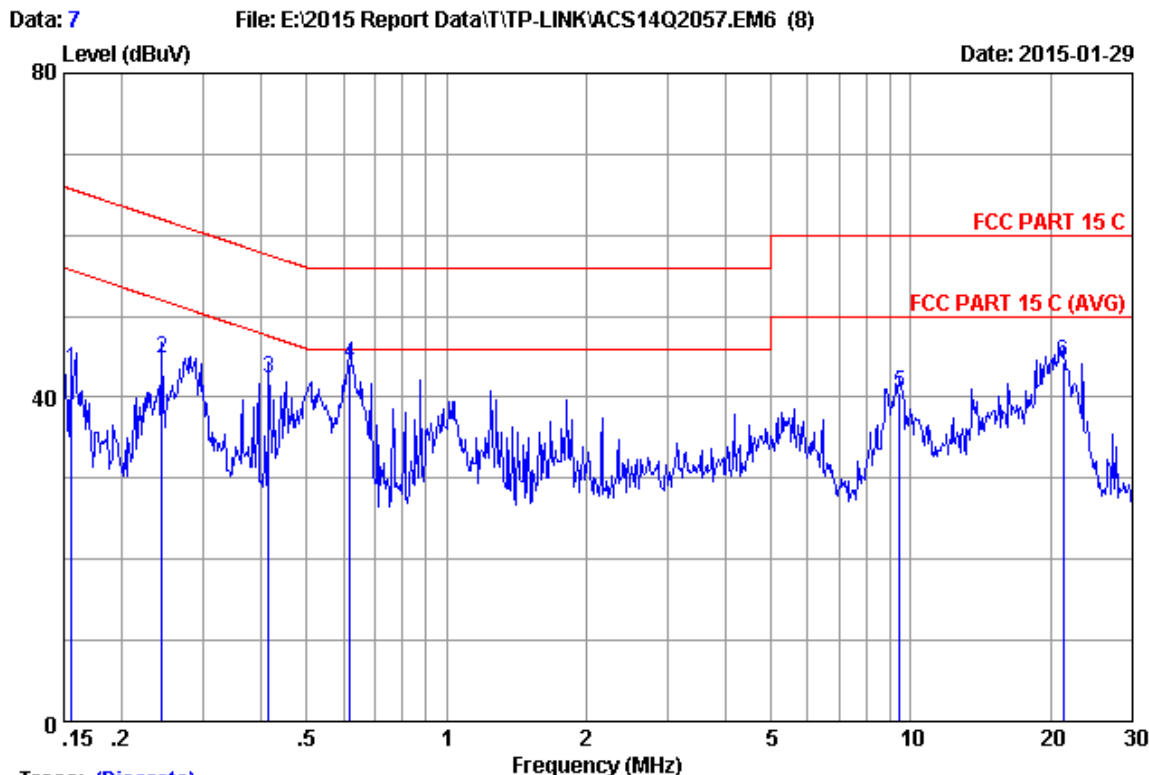

Trace: (Discrete)

Site no :1#conduction Data No :7
 Dis./Ant. :2014 ESH2-25 NEUTRAL
 Limit :FCC PART 15 C
 Env./Ins. :23.1°C/50% Engineer :Alice-Yang
 EUT :2.4GHz 300Mbps 9dBi Outdoor CPE
 Power Rating :DC 24V From Adapter Input AC 120V/60Hz
 Test Mode :Tx Mode
 M/N:CPE210

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.15567	0.13	9.89	33.50	43.52	65.69	22.17	QP
2	0.24422	0.13	9.90	34.75	44.78	61.95	17.17	QP
3	0.41485	0.15	9.90	32.39	42.44	57.55	15.11	QP
4	0.62054	0.16	9.91	34.08	44.15	56.00	11.85	QP
5	9.451	0.32	10.01	30.17	40.50	60.00	19.50	QP
6	21.260	0.76	10.12	33.47	44.35	60.00	15.65	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss(Include 10dB pulse limit)+Reading.
 2.If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

4. RADIATED EMISSION TEST

4.1. Test Equipment

4.1.1. For frequency range 30MHz~1000MHz (At Anechoic Chamber)


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3#Chamber	AUDIX	N/A	N/A	Nov.23, 14	1 Year
2.	EMI Spectrum	Agilent	E4407B	MY41440292	Apr. 28,14	1 Year
3.	Test Receiver	Rohde & Schwarz	ESVS10	834468/011	Apr. 28,14	1 Year
4.	Amplifier	HP	8447D	2648A04738	Apr. 28,14	1 Year
5.	Bilog Antenna	TESEQ	CBL6112D	35375	Jun. 18, 14	1 Year
6.	RF Cable	MIYAZAKI	CFD400-NL	3# Chamber No.1	Apr. 28,14	1 Year
7.	Coaxial Switch	Anritsu	MP59B	6200313662	Apr. 28,14	1 Year

4.1.2. For frequency range 1GHz~25GHz (At Anechoic Chamber)


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum Analyzer	Agilent	E4446A	US44300459	Apr. 28,14	1 Year
2	Horn Antenna	ETS	3115	9510-4580	Jun. 06, 14	1 Year
3	Amplifier	Agilent	8449B	3008A02495	Apr. 28,14	1 Year
4	RF Cable	Hubersuhner	SUCOFLEX106	77977/6	Apr. 28,14	1 Year
5	RF Cable	Hubersuhner	SUCOFLEX106	28616/2	Apr. 28,14	1 Year
6	Horn Antenna	ETS	3116	00060089	Sep.20, 14	1 Year

4.2. Block Diagram of Test Setup

For frequency range 30MHz-1000MHz

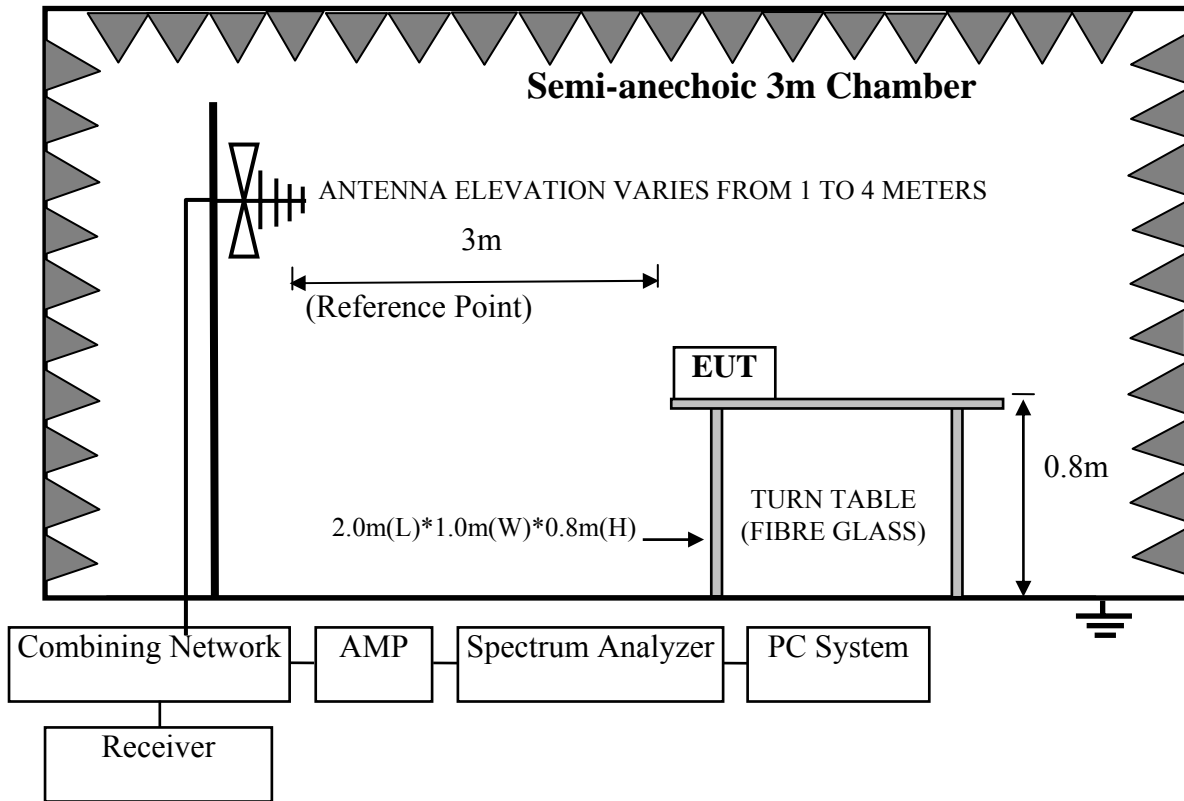

For frequency range 1GHz-25GHz

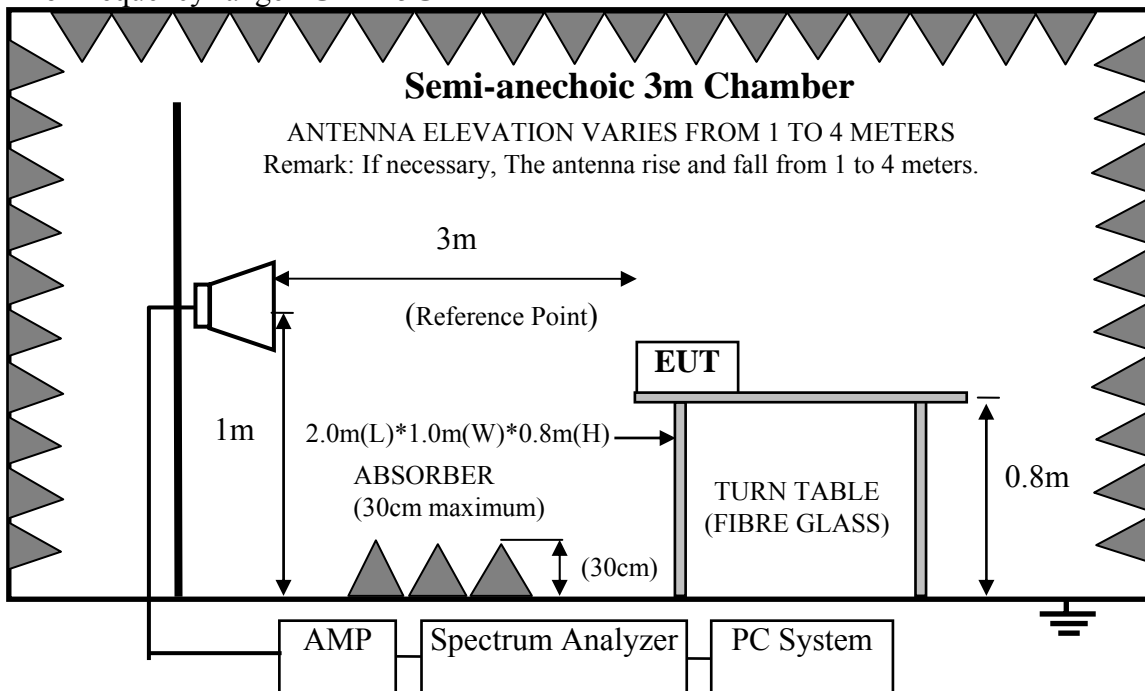

4.3. Radiated Emission Limit

4.3.1. 15.209 limits

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

Remark : (1) Emission level $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V}/\text{m}$

(2) The smaller limit shall apply at the cross point between two frequency bands.

(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

4.3.2. 15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

4.4. EUT Configuration on Test

The configurations of EUT are listed in Section 3.5.

4.5. Operating Condition of EUT

Same as Conducted Emission test that is listed in Section 3.6. except the test set up replaced by Section 4.2.

4.6. Test Procedure

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna are set on test.

This test was performed with EUT in X, Y, Z position, and the worse case was found when EUT in X position as test photo indicated.

The bandwidth of the EMI test receiver (R&S ESVS10) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 3MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz

The frequency range from 30MHz to 10th harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.

4.7. Radiated Emission Test Results

PASS.

All the emissions from 30MHz to 25 GHz were comply with 15.209 limits.


Note: For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

5MHz
Frequency: 30MHz~1GHz

Data: 7

File: E:\2014 Report Data\T\TP-LINK\ACS14Q2057.EM6 (18)


Date: 2015-01-25

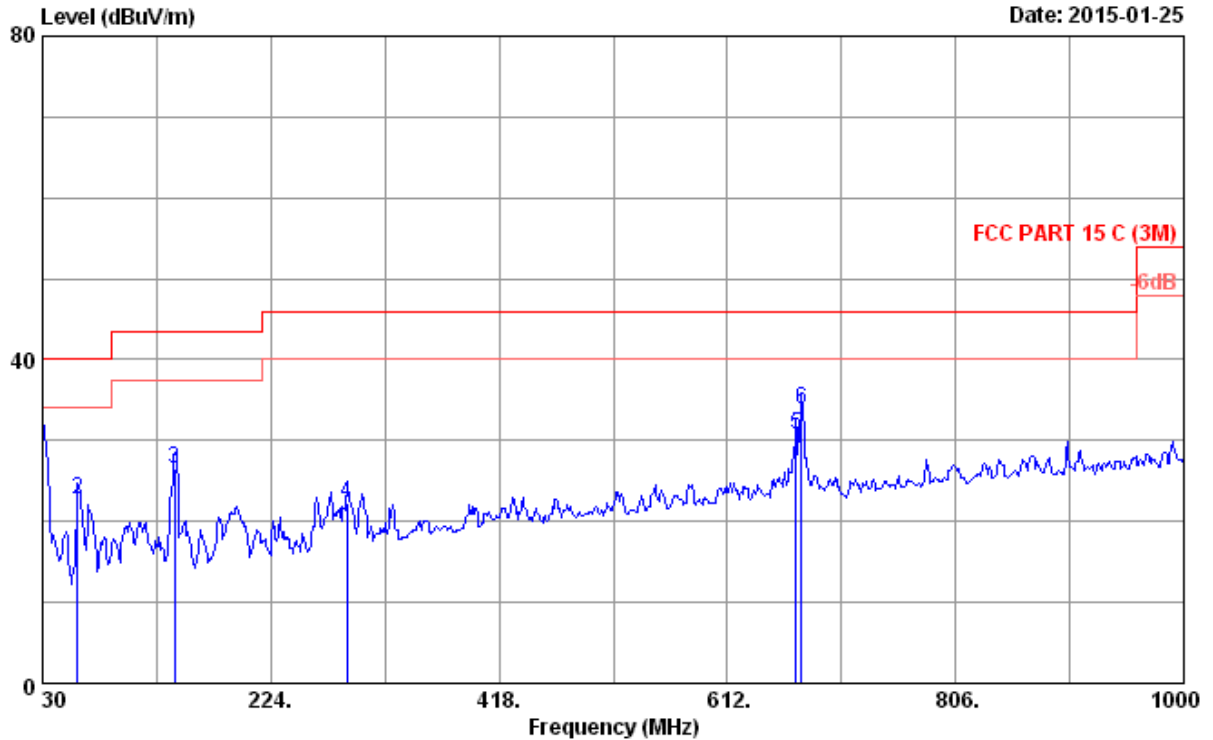

Site no. : 3m Chamber Data no. : 7
 Dis. / Ant. : 3m 2013 CBL6112D 35375 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 22.5°C/47% Engineer : Leo-Li
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : Tx Mode
 M/N:CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.000	20.10	0.83	9.44	30.37	40.00	9.63	QP
2	60.070	6.70	1.23	14.79	22.72	40.00	17.28	QP
3	142.520	11.77	1.57	13.25	26.59	43.50	16.91	QP
4	288.990	13.75	2.13	6.51	22.39	46.00	23.61	QP
5	670.200	19.70	3.24	7.70	30.64	46.00	15.36	QP
6	675.050	19.80	3.25	10.92	33.97	46.00	12.03	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

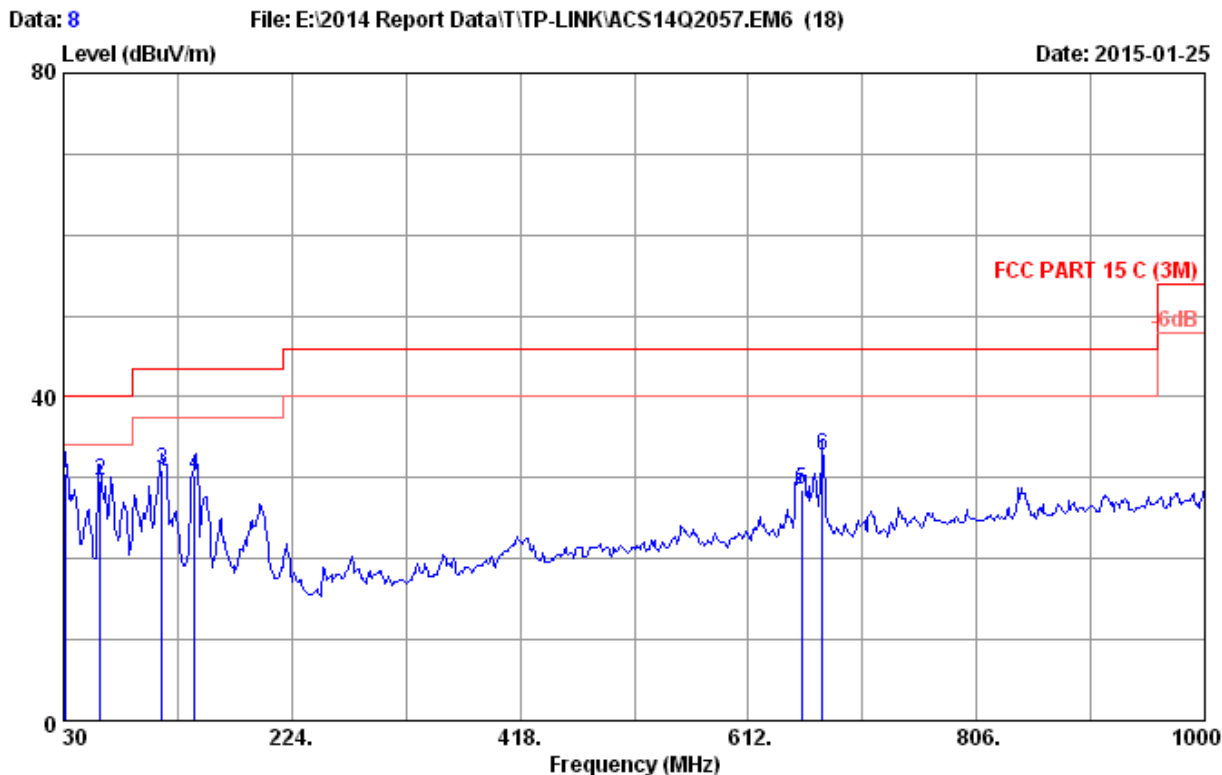

Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m 2013 CBL6112D 35375 Ant. pol. : VERTICAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 22.5°C/47% Engineer : Leo-Li
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : Tx Mode
 M/N:CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	31.940	18.84	0.86	10.79	30.49	40.00	9.51	QP
2	61.040	6.65	1.24	21.80	29.69	40.00	10.31	QP
3	113.420	12.54	1.46	16.98	30.98	43.50	12.52	QP
4	141.550	11.89	1.57	16.90	30.36	43.50	13.14	QP
5	657.590	19.60	3.20	5.66	28.46	46.00	17.54	QP
6	675.050	19.80	3.25	9.67	32.72	46.00	13.28	QP


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Frequency: 1GHz~18GHz

Data: 1

File: F:\2014 Report\T\TP-LINK\ACS14Q2057-5M.EM6 (78)


Date: 2015-01-25

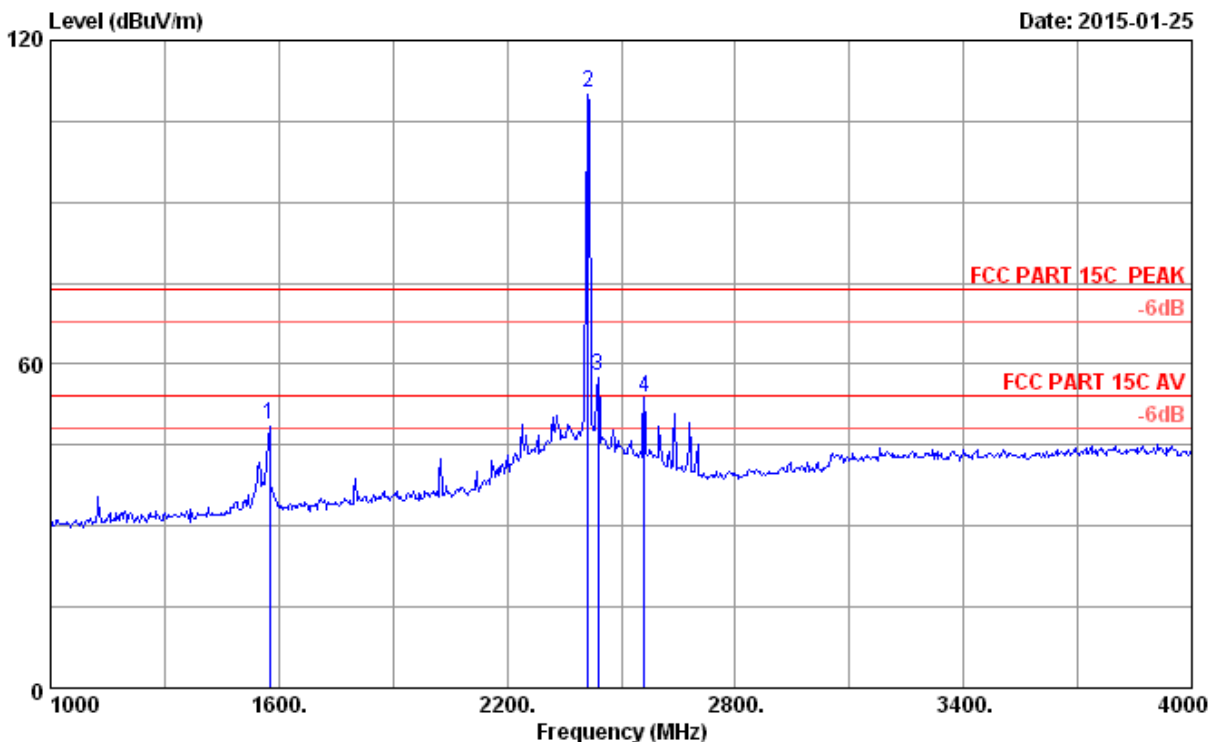

Site no. : 3m Chamber Data no. : 1
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	54.73	48.68	74.00	25.32	Peak
2	2412.000	28.21	5.81	35.70	111.92	110.24	74.00	-36.24	Peak
3	2440.000	28.27	5.86	35.70	59.36	57.79	74.00	16.21	Peak
4	2560.000	28.64	6.03	35.70	54.71	53.68	74.00	20.32	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

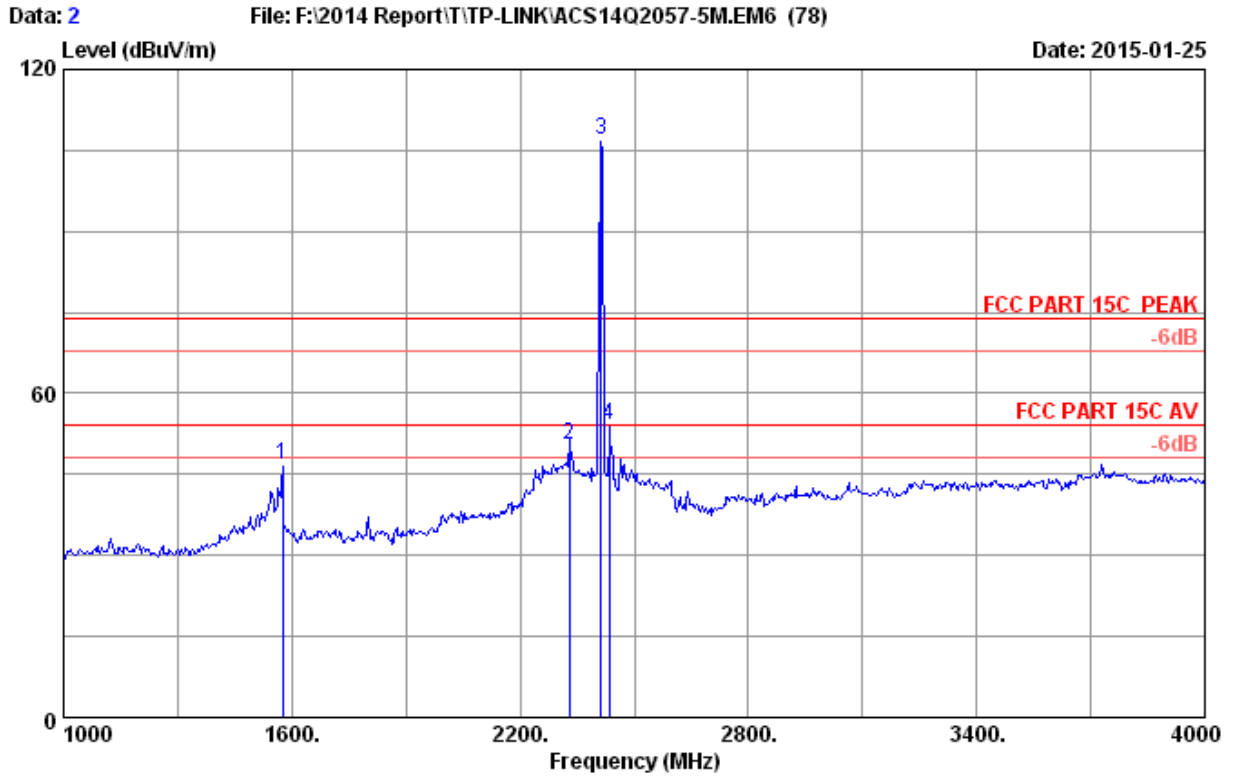


Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	52.76	46.71	74.00	27.29	Peak
2	2329.000	28.02	5.69	35.70	52.47	50.48	74.00	23.52	Peak
3	2412.000	28.21	5.81	35.70	108.77	107.09	74.00	-33.09	Peak
4	2434.000	28.25	5.85	35.70	55.68	54.08	74.00	19.92	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

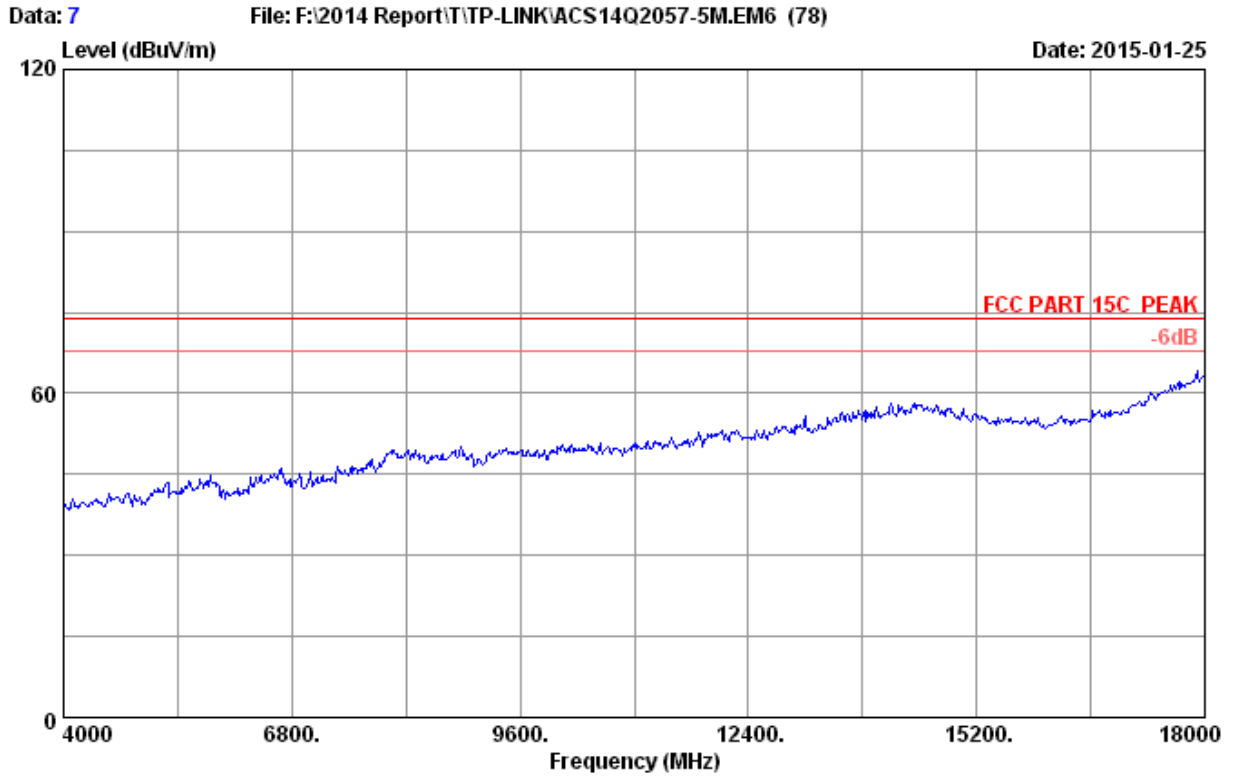


Site no. : 3m Chamber Data no. : 7
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11b 2412MHz Tx
M/N : CPE210

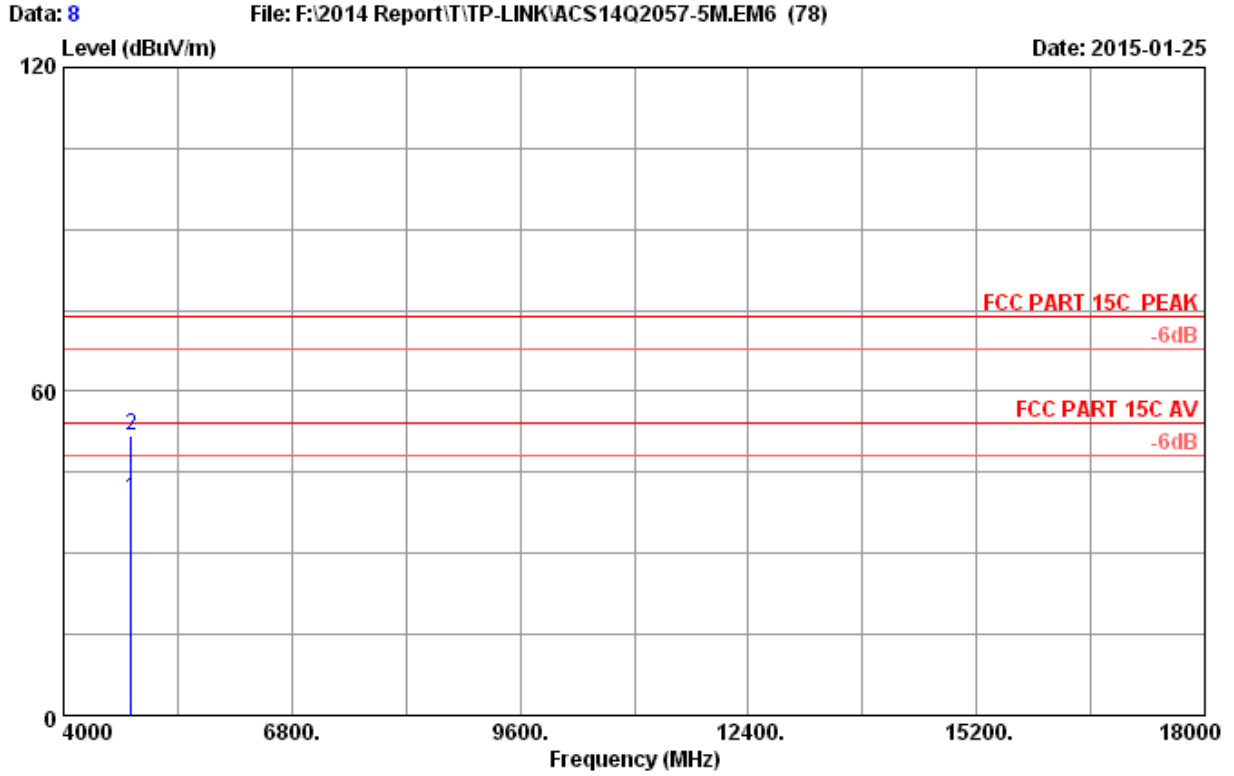


Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	32.88	8.58	35.70	34.21	39.97	54.00	14.03	Average
2	4824.000	32.88	8.58	35.70	45.98	51.74	74.00	22.26	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

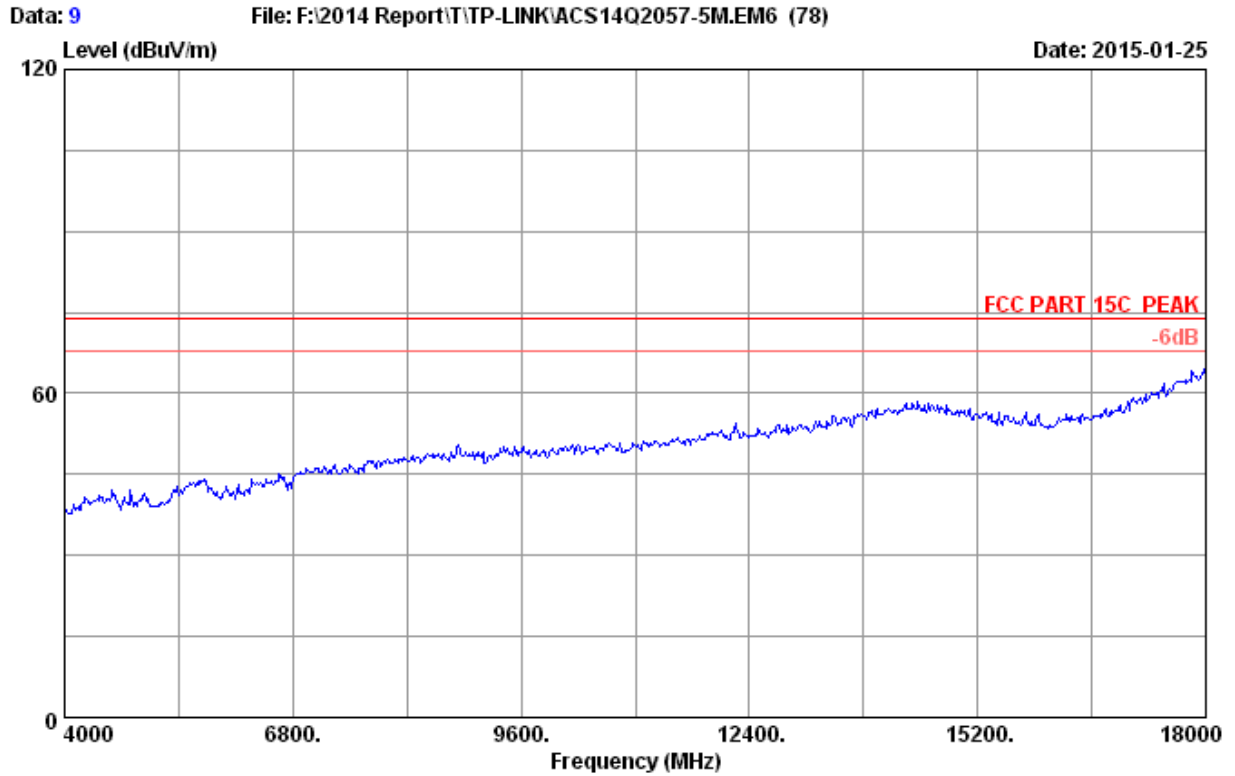


Site no. : 3m Chamber Data no. : 9
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11b 2412MHz Tx
M/N : CPE210

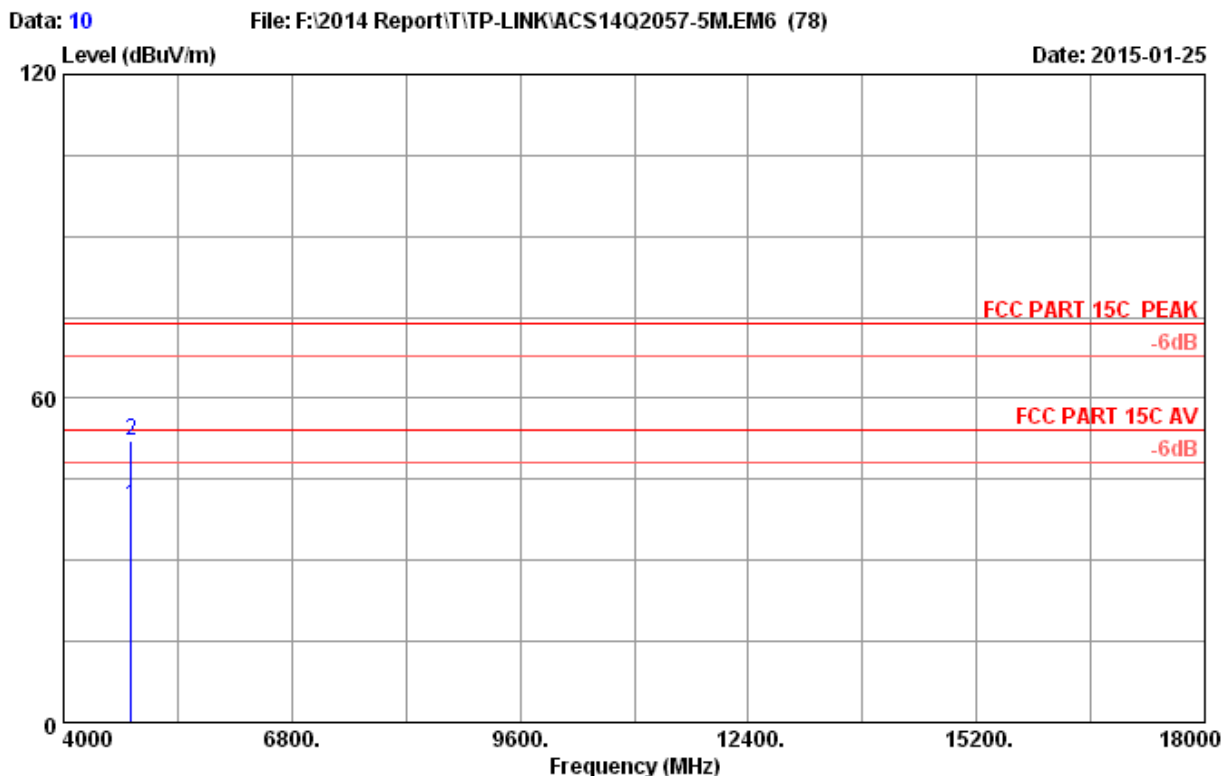


Site no. : 3m Chamber Data no. : 10
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	32.88	8.58	35.70	34.29	40.05	54.00	13.95	Average
2	4824.000	32.88	8.58	35.70	46.38	52.14	74.00	21.86	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

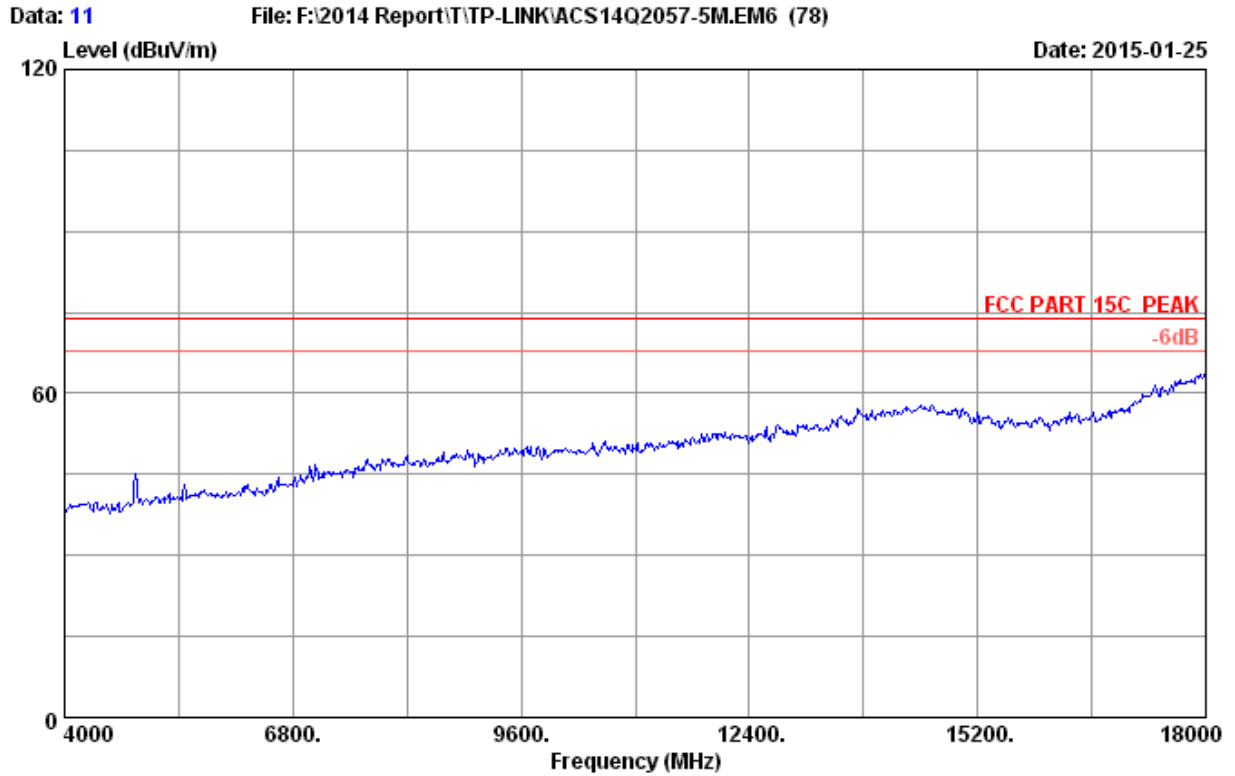


Site no. : 3m Chamber Data no. : 11
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11b 2437MHz Tx
M/N : CPE210

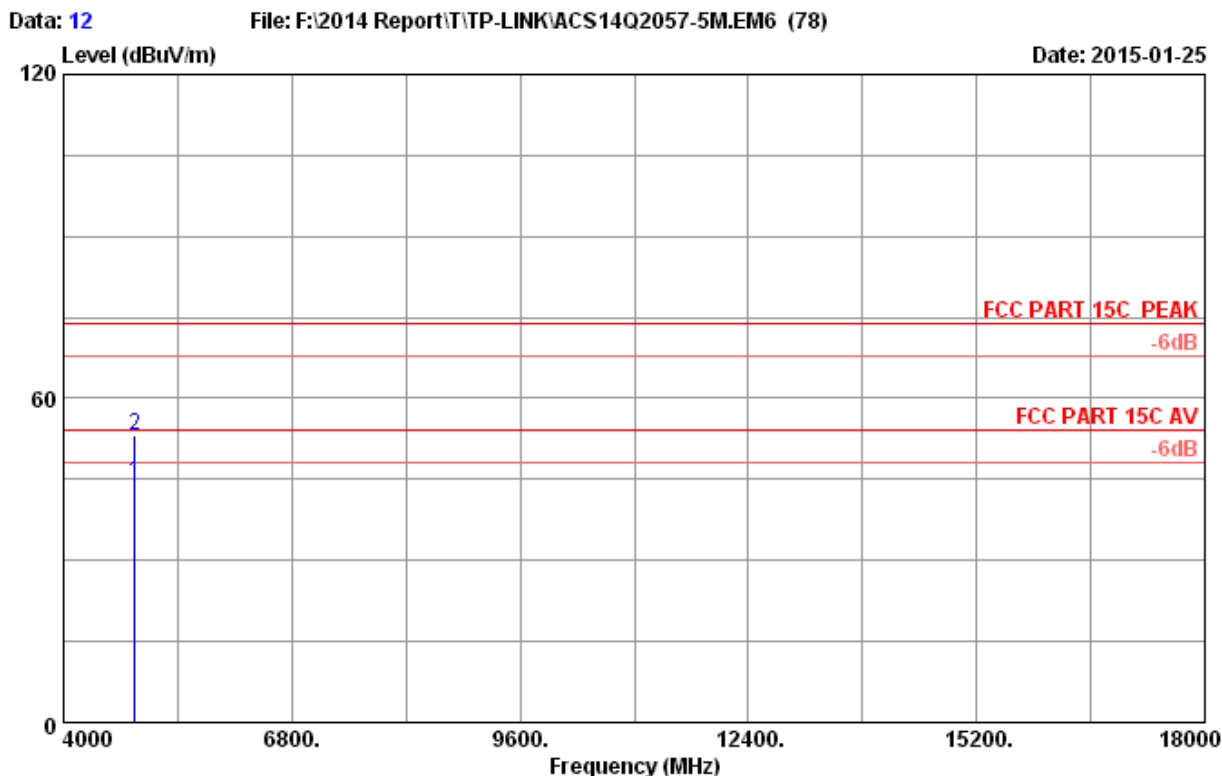


Site no. : 3m Chamber Data no. : 12
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2437MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	32.97	8.63	35.70	38.57	44.47	54.00	9.53	Average
2	4874.000	32.97	8.63	35.70	47.40	53.30	74.00	20.70	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

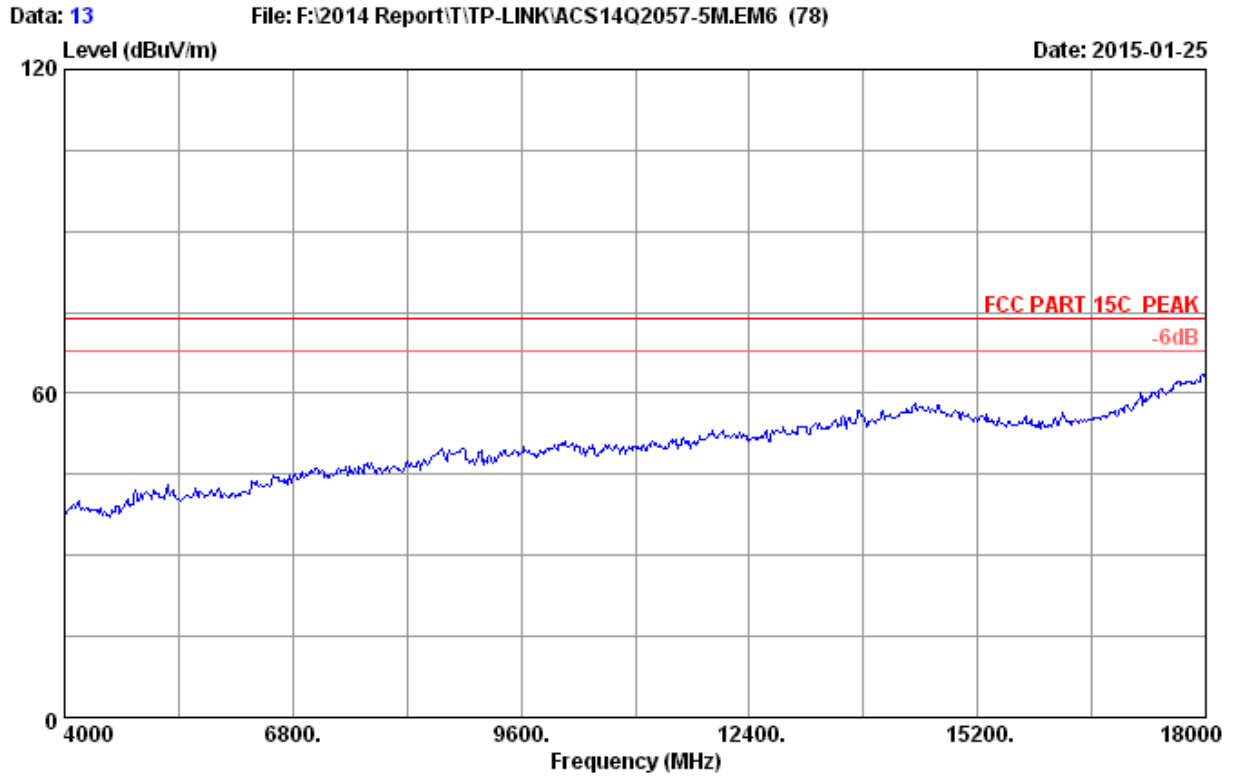


Site no. : 3m Chamber Data no. : 13
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11b 2437MHz Tx
M/N : CPE210

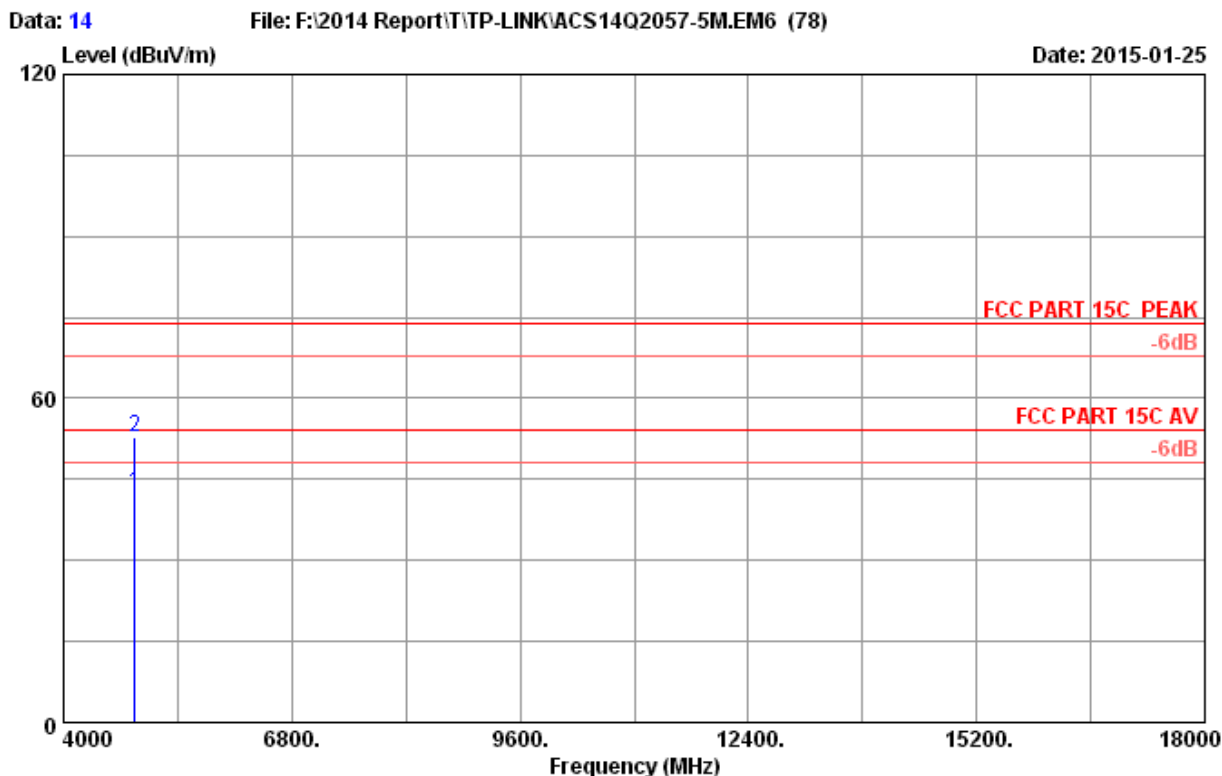

Site no. : 3m Chamber Data no. : 14
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2437MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	32.97	8.63	35.70	36.49	42.39	54.00	11.61	Average
2	4874.000	32.97	8.63	35.70	46.93	52.83	74.00	21.17	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

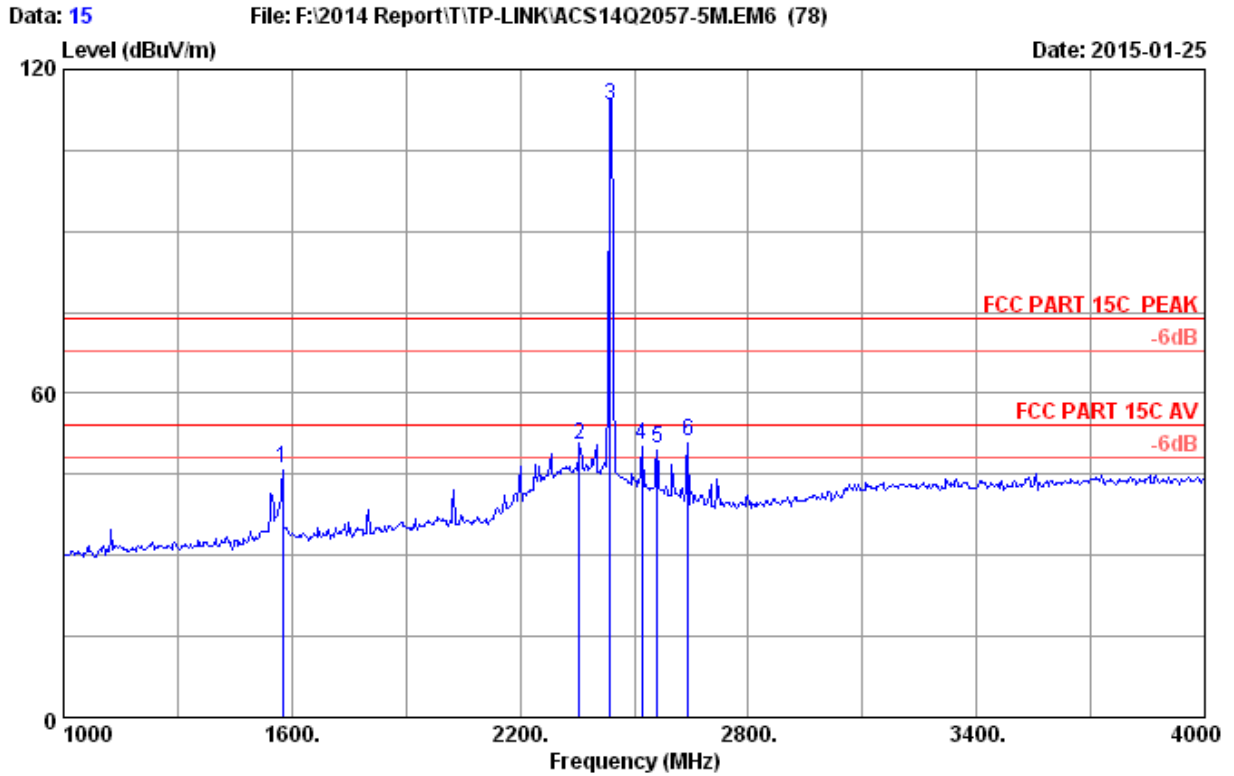

Site no. : 3m Chamber Data no. : 15
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2437MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	52.33	46.28	74.00	27.72	Peak
2	2356.000	28.08	5.73	35.70	52.53	50.64	74.00	23.36	Peak
3	2437.000	28.26	5.85	35.70	115.02	113.43	74.00	-39.43	Peak
4	2521.000	28.48	5.97	35.70	51.76	50.51	74.00	23.49	Peak
5	2560.000	28.64	6.03	35.70	50.68	49.65	74.00	24.35	Peak
6	2641.000	28.96	6.15	35.70	51.79	51.20	74.00	22.80	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

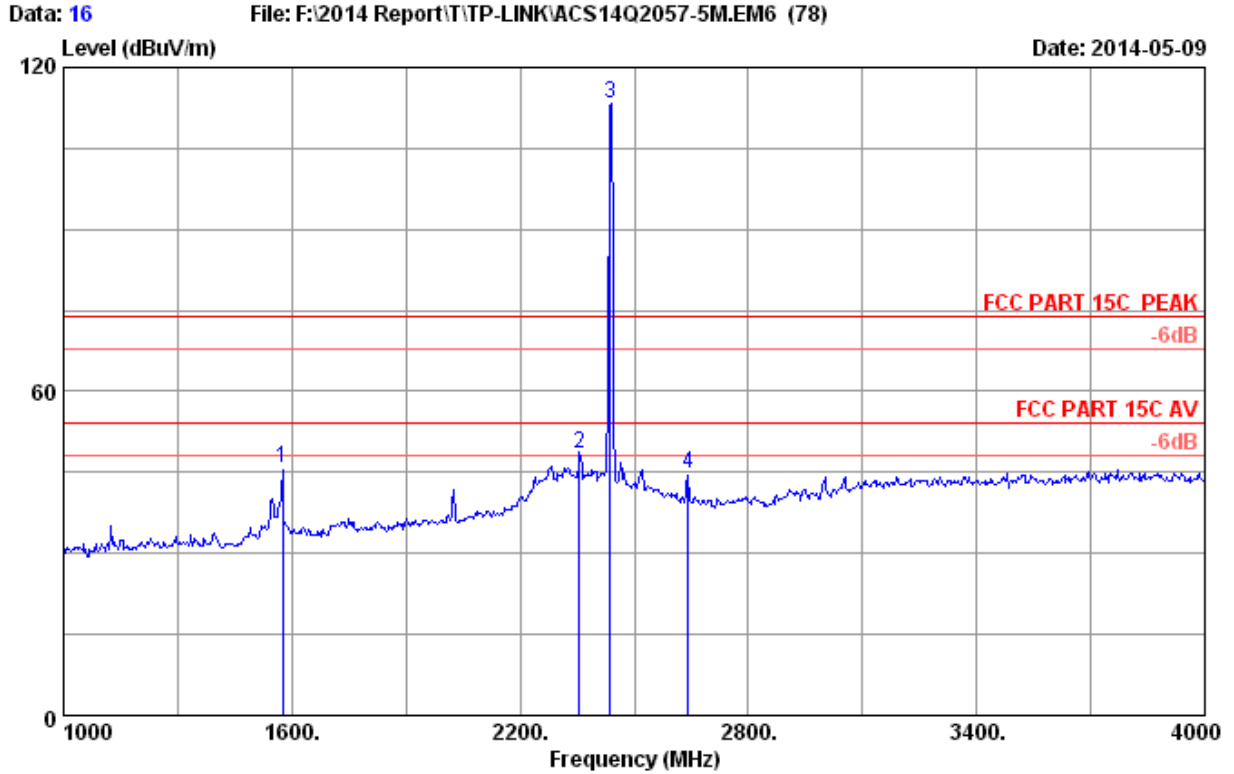

Site no. : 3m Chamber Data no. : 16
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2437MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	51.75	45.70	74.00	28.30	Peak
2	2356.000	28.08	5.73	35.70	50.37	48.48	74.00	25.52	Peak
3	2437.000	28.26	5.85	35.70	114.83	113.24	74.00	-39.24	Peak
4	2641.000	28.96	6.15	35.70	45.36	44.77	74.00	29.23	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

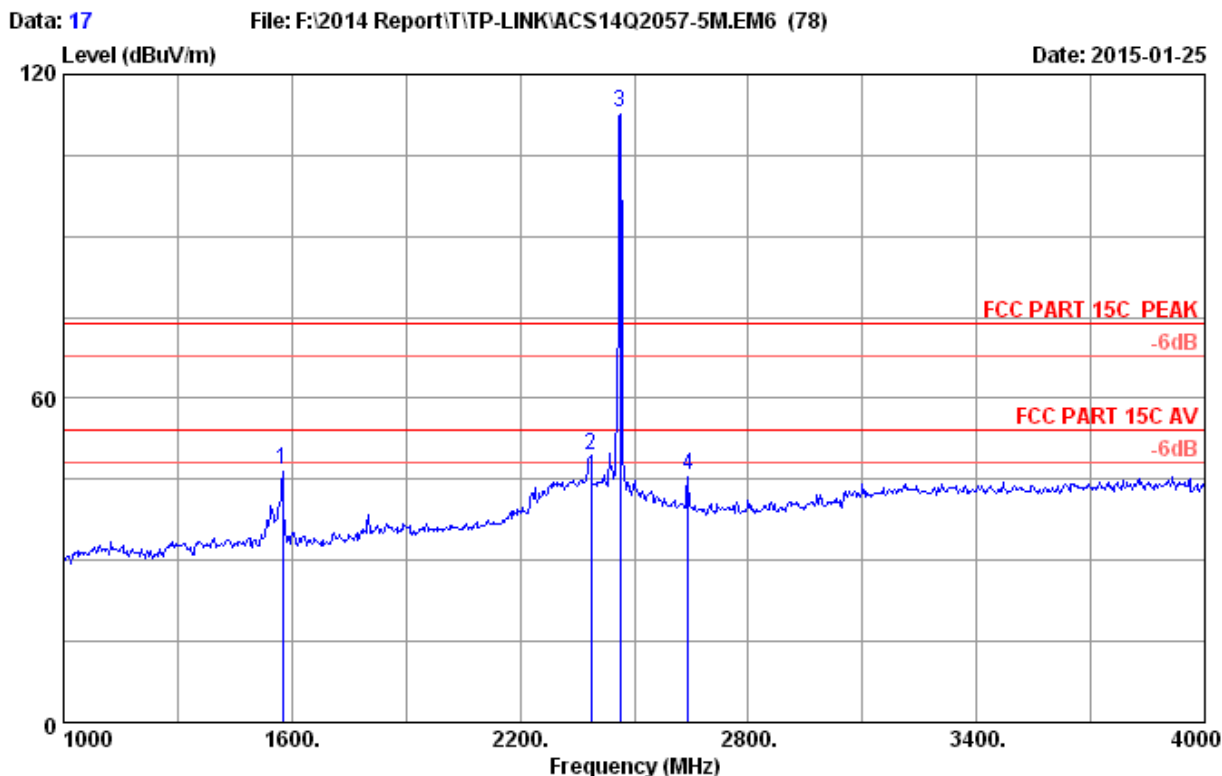


```

Site no.      : 3m Chamber                      Data no.   : 17
Dis. / Ant.  : 3m 2014 3115 (4580)             Ant. pol.  : VERTICAL
Limit        : FCC PART 15C PEAK
Env. / Ins.  : 23*C/54%
Engineer     : Alice_Yang
EUT          : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode    : IEEE802.11b 2462MHz Tx
M/N         : CPE210
    
```

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	52.79	46.74	74.00	27.26	Peak
2	2386.000	28.15	5.78	35.70	51.39	49.62	74.00	24.38	Peak
3	2462.000	28.32	5.89	35.70	114.51	113.02	74.00	-39.02	Peak
4	2641.000	28.96	6.15	35.70	46.30	45.71	74.00	28.29	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

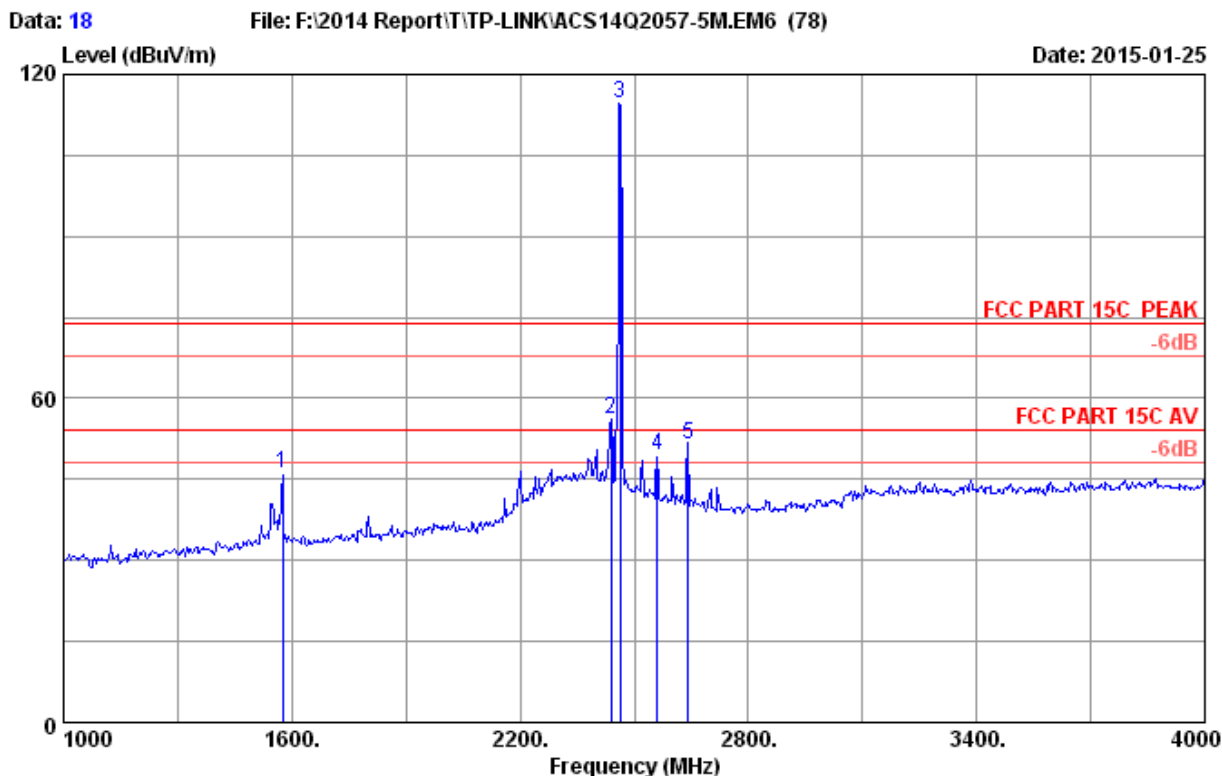


Site no. : 3m Chamber Data no. : 18
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	52.34	46.29	74.00	27.71	Peak
2	2440.000	28.27	5.86	35.70	57.84	56.27	74.00	17.73	Peak
3	2462.000	28.32	5.89	35.70	116.12	114.63	74.00	-40.63	Peak
4	2560.000	28.64	6.03	35.70	50.39	49.36	74.00	24.64	Peak
5	2641.000	28.96	6.15	35.70	52.11	51.52	74.00	22.48	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

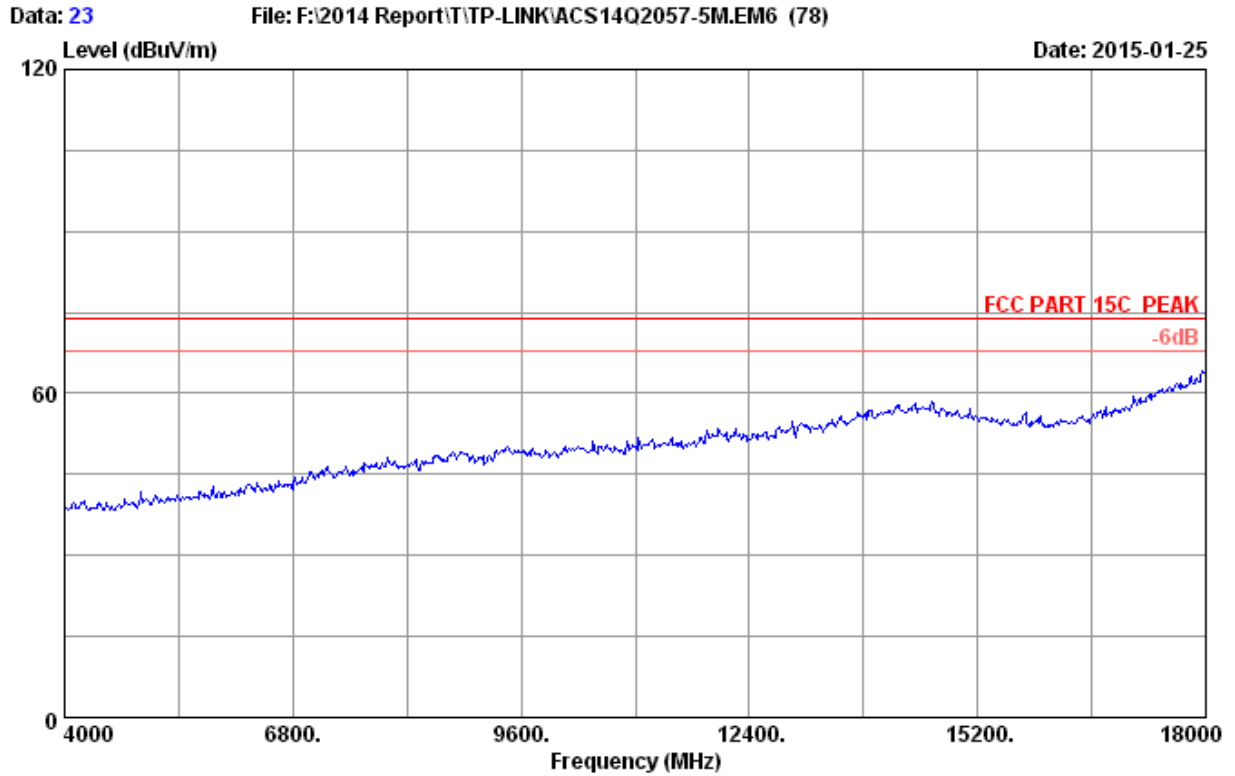


Site no. : 3m Chamber Data no. : 23
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11b 2462MHz Tx
M/N : CPE210

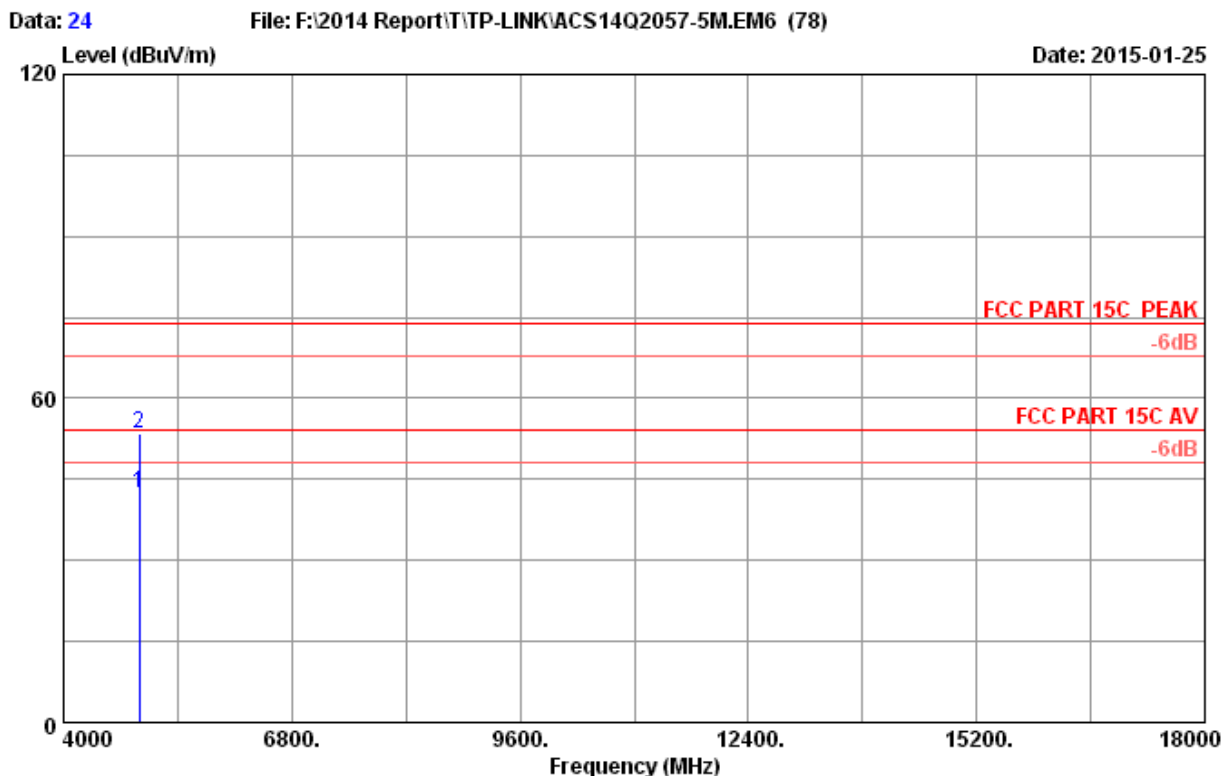


Site no. : 3m Chamber Data no. : 24
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.000	33.06	8.69	35.70	36.29	42.34	54.00	11.66	Average
2	4924.000	33.06	8.69	35.70	47.36	53.41	74.00	20.59	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

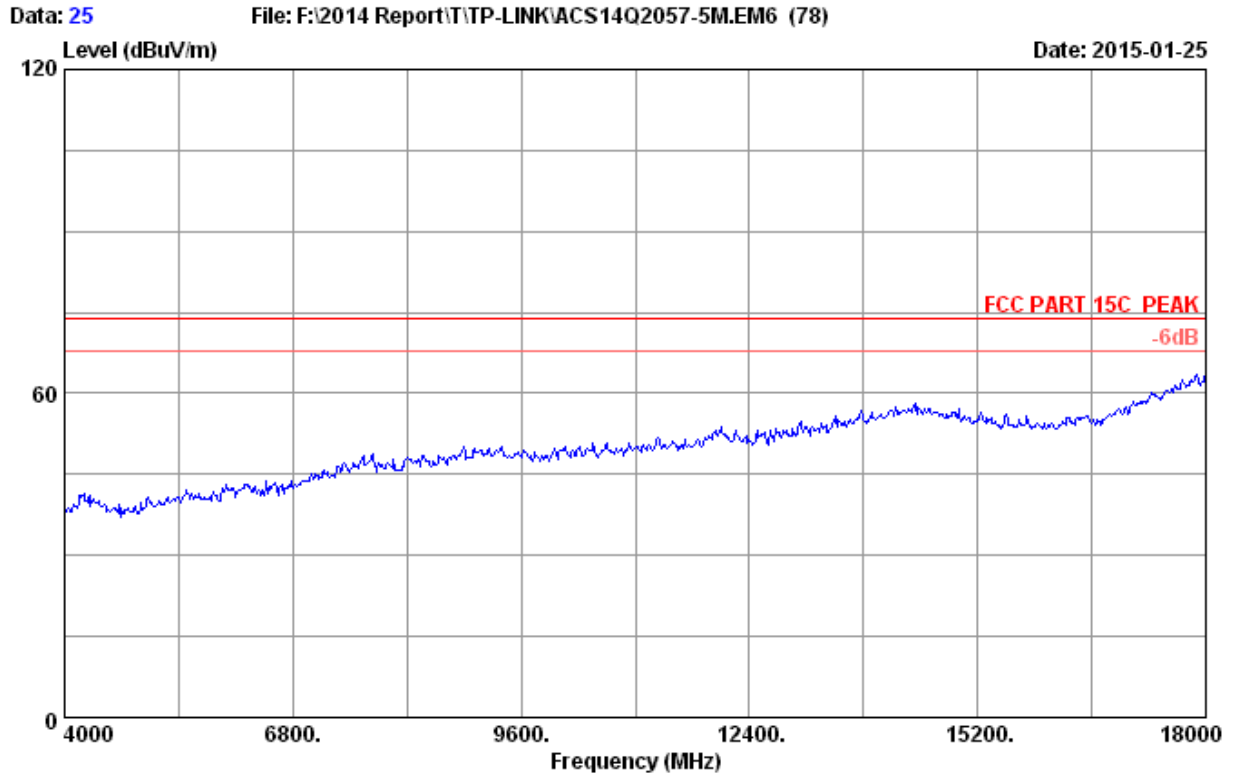

Site no. : 3m Chamber Data no. : 25
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11b 2462MHz Tx
M/N : CPE210

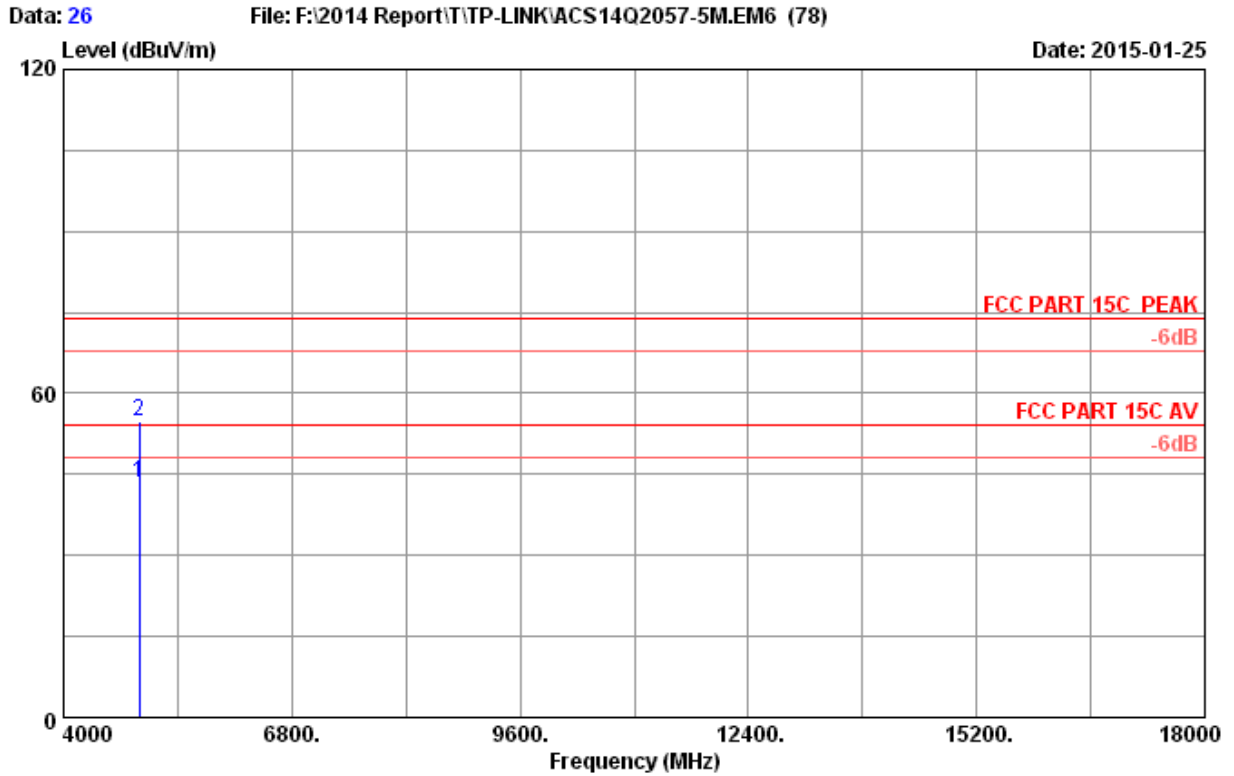

Site no. : 3m Chamber Data no. : 26
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2462MHz Tx
 M/N : CPE210


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.000	33.06	8.69	35.70	37.48	43.53	54.00	10.47	Average
2	4924.000	33.06	8.69	35.70	48.64	54.69	74.00	19.31	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

Data: 27

File: F:\2014 Report\T\TP-LINK\ACS14Q2057-5M.EM6 (78)


Date: 2015-01-25

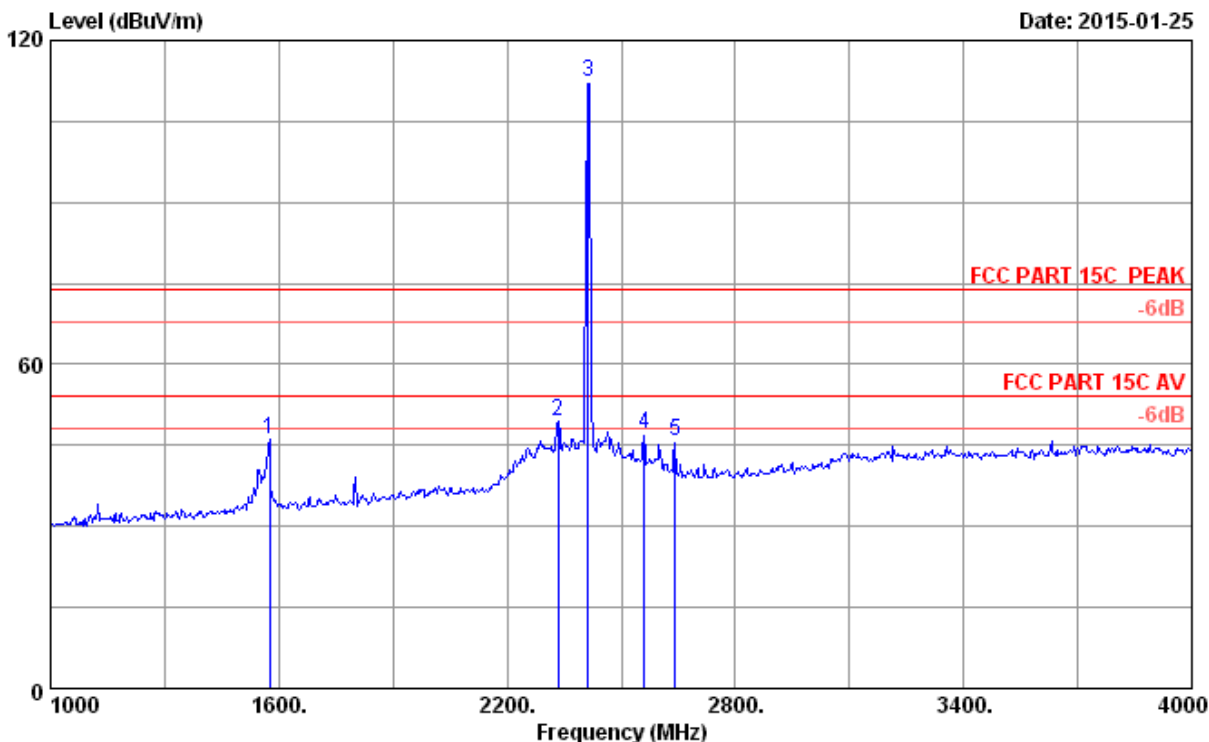

Site no. : 3m Chamber Data no. : 27
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	52.33	46.28	74.00	27.72	Peak
2	2335.000	28.04	5.70	35.70	51.52	49.56	74.00	24.44	Peak
3	2412.000	28.21	5.81	35.70	113.95	112.27	74.00	-38.27	Peak
4	2560.000	28.64	6.03	35.70	48.22	47.19	74.00	26.81	Peak
5	2641.000	28.96	6.15	35.70	46.51	45.92	74.00	28.08	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

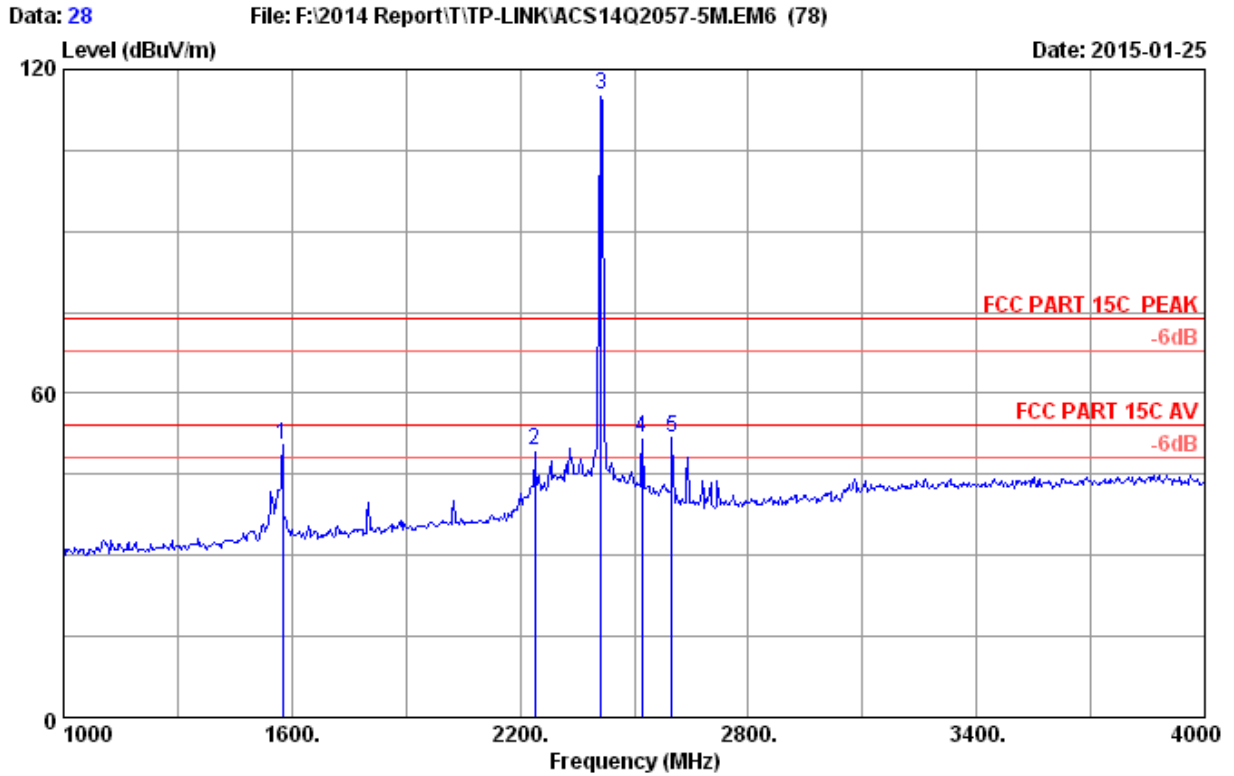


Site no. : 3m Chamber Data no. : 28
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	56.58	50.53	74.00	23.47	Peak
2	2239.000	27.83	5.56	35.70	51.62	49.31	74.00	24.69	Peak
3	2412.000	28.21	5.81	35.70	116.85	115.17	74.00	-41.17	Peak
4	2521.000	28.48	5.97	35.70	53.12	51.87	74.00	22.13	Peak
5	2599.000	28.80	6.09	35.70	52.68	51.87	74.00	22.13	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

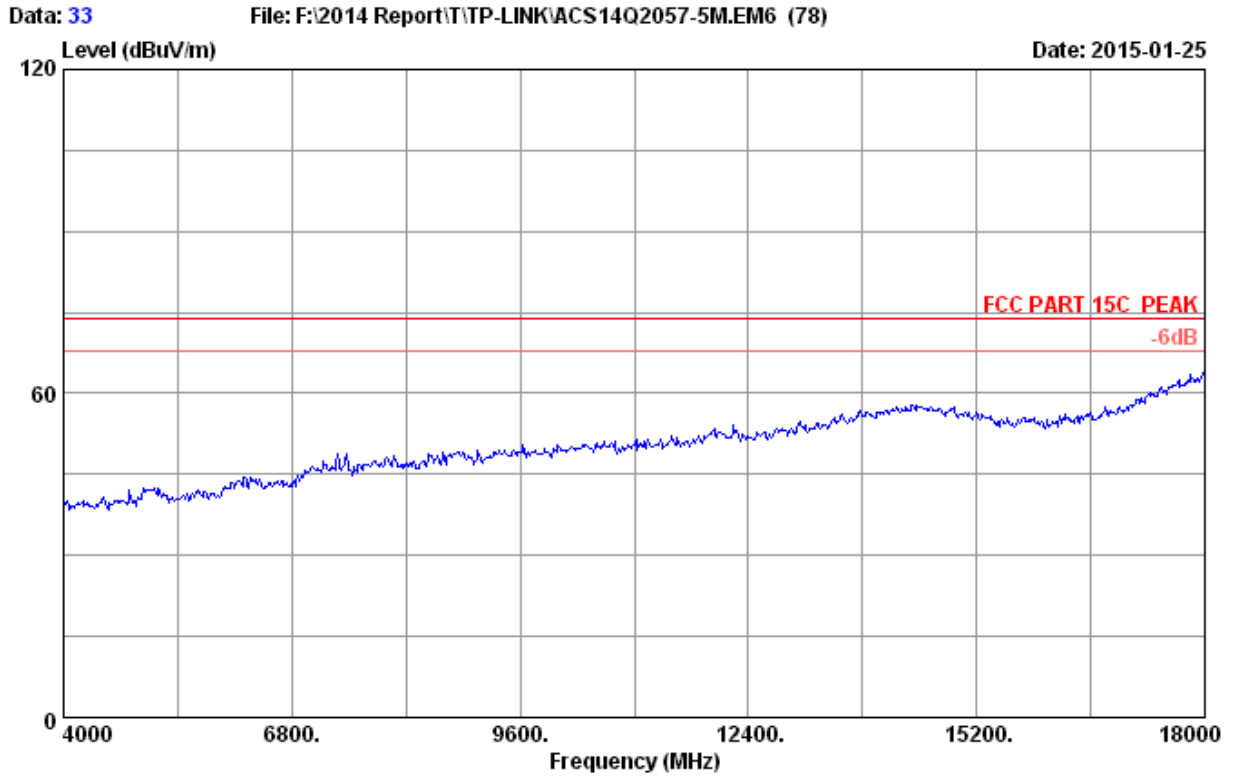


Site no. : 3m Chamber Data no. : 33
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11g 2412MHz Tx
M/N : CPE210

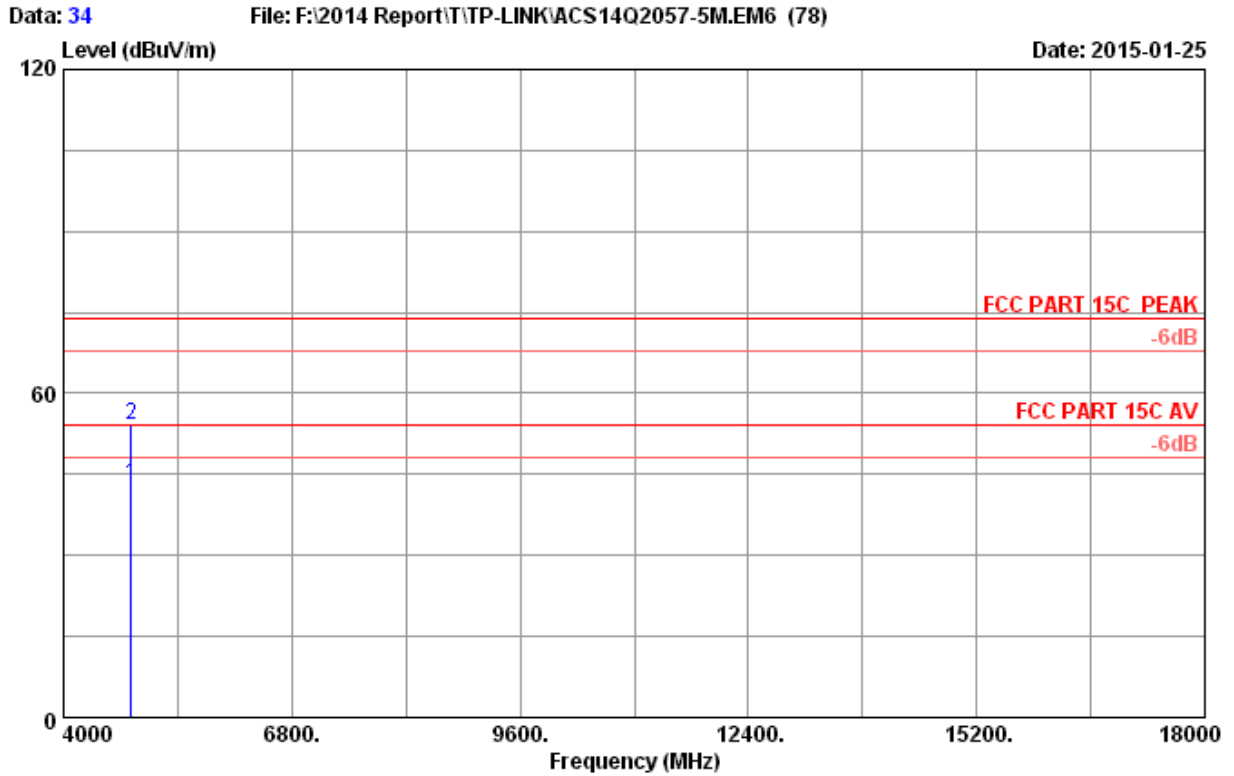


Site no. : 3m Chamber Data no. : 34
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	32.88	8.58	35.70	37.34	43.10	54.00	10.90	Average
2	4824.000	32.88	8.58	35.70	48.52	54.28	74.00	19.72	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

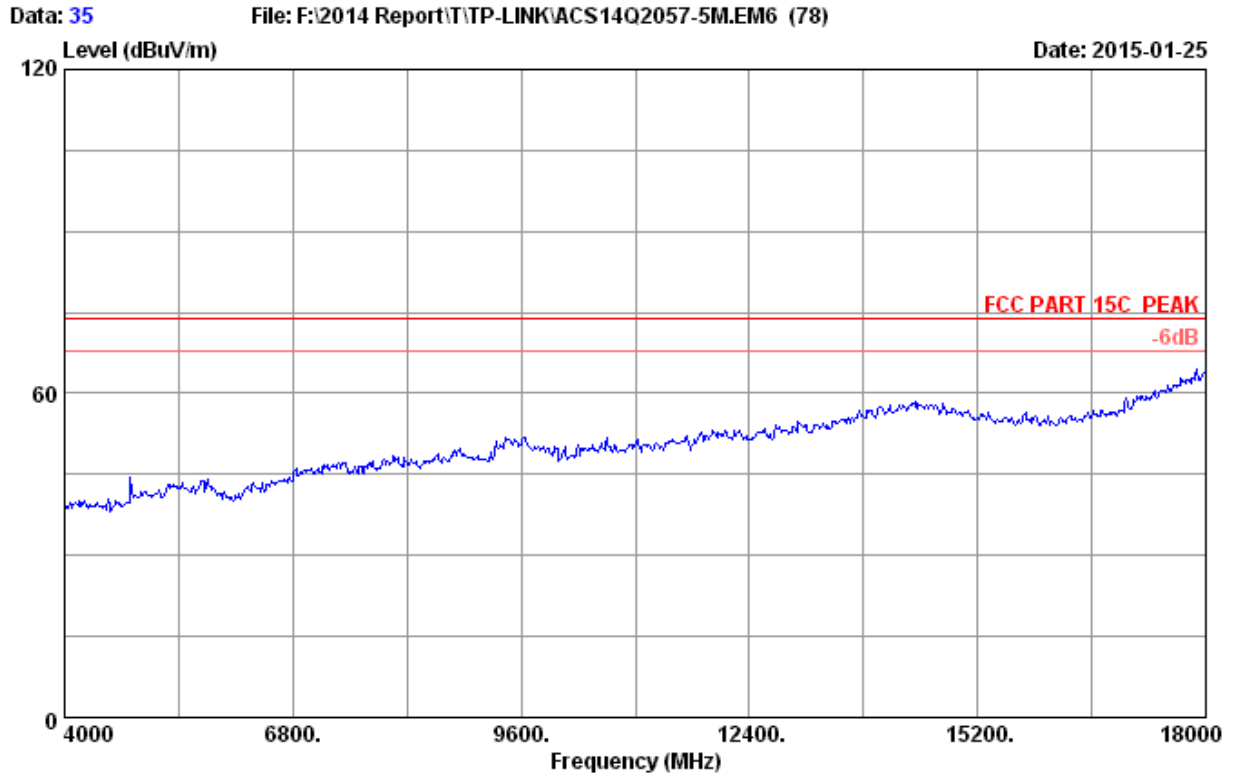


Site no. : 3m Chamber Data no. : 35
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11g 2412MHz Tx
M/N : CPE210

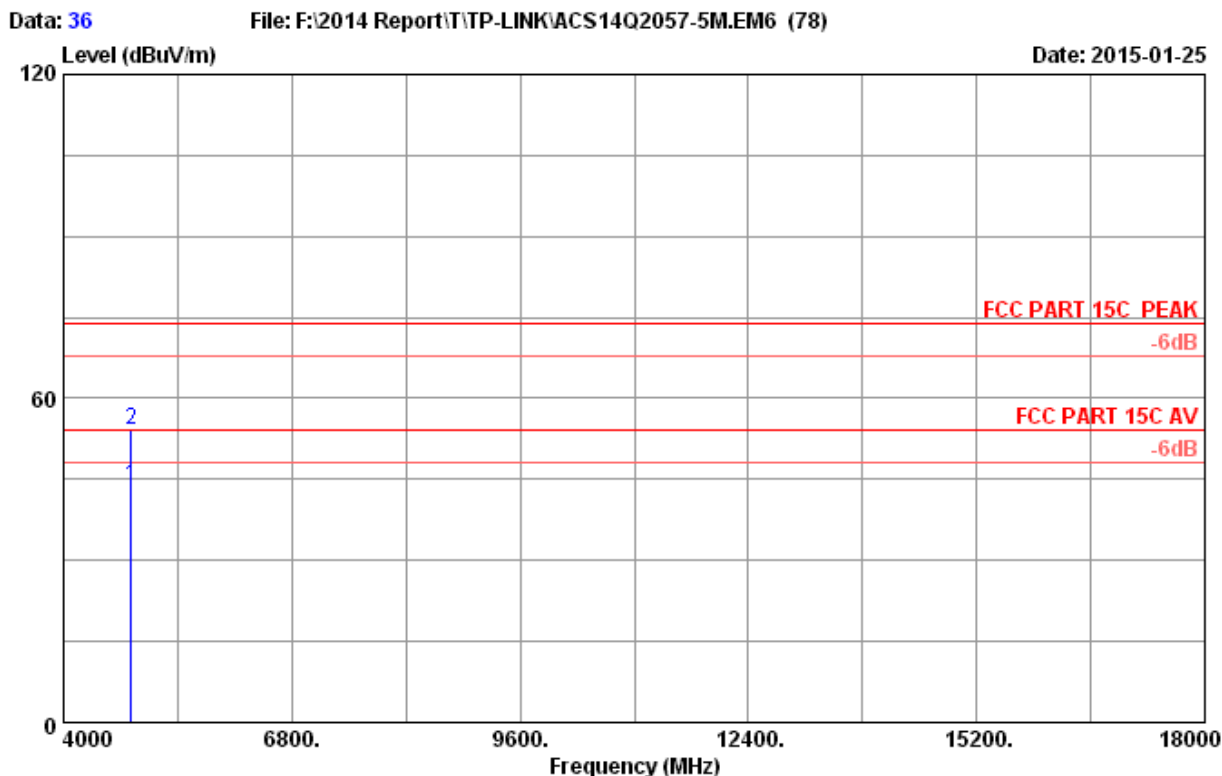

Site no. : 3m Chamber Data no. : 36
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	32.88	8.58	35.70	38.02	43.78	54.00	10.22	Average
2	4824.000	32.88	8.58	35.70	48.25	54.01	74.00	19.99	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

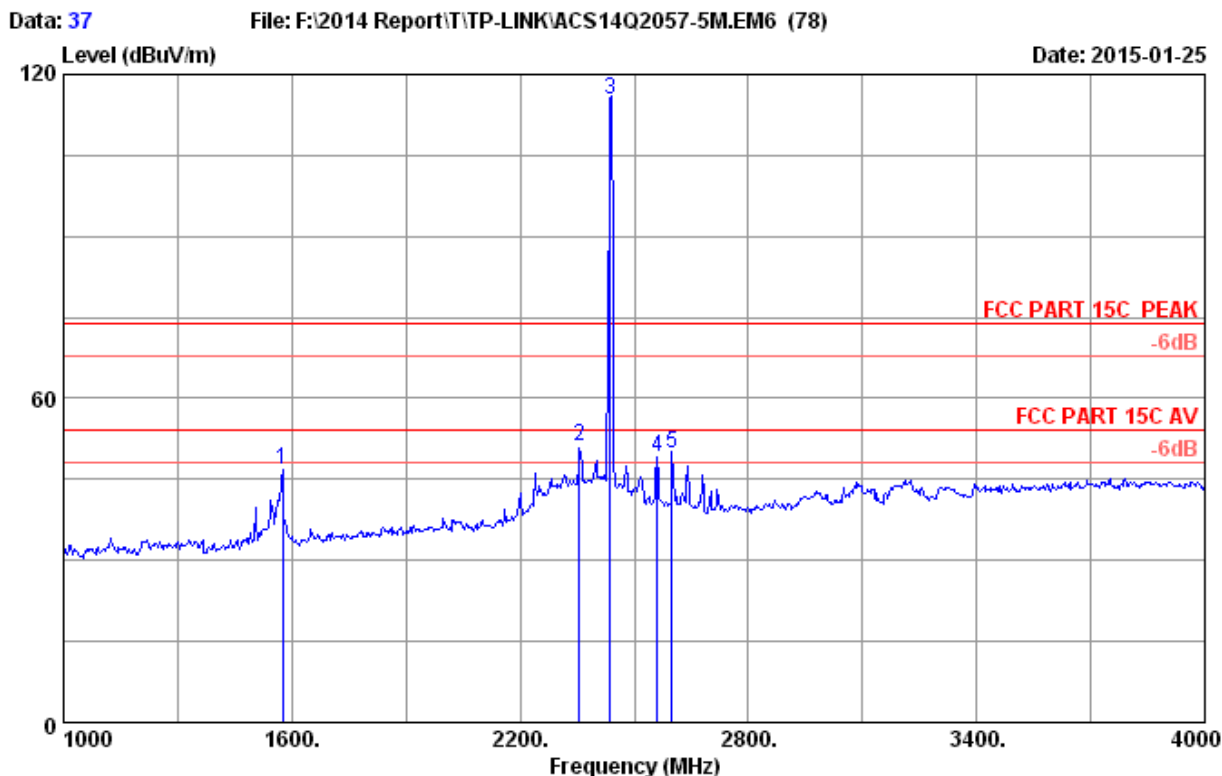

Site no. : 3m Chamber Data no. : 37
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2437MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	52.88	46.83	74.00	27.17	Peak
2	2356.000	28.08	5.73	35.70	53.13	51.24	74.00	22.76	Peak
3	2437.000	28.26	5.85	35.70	116.83	115.24	74.00	-41.24	Peak
4	2560.000	28.64	6.03	35.70	50.33	49.30	74.00	24.70	Peak
5	2599.000	28.80	6.09	35.70	50.68	49.87	74.00	24.13	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

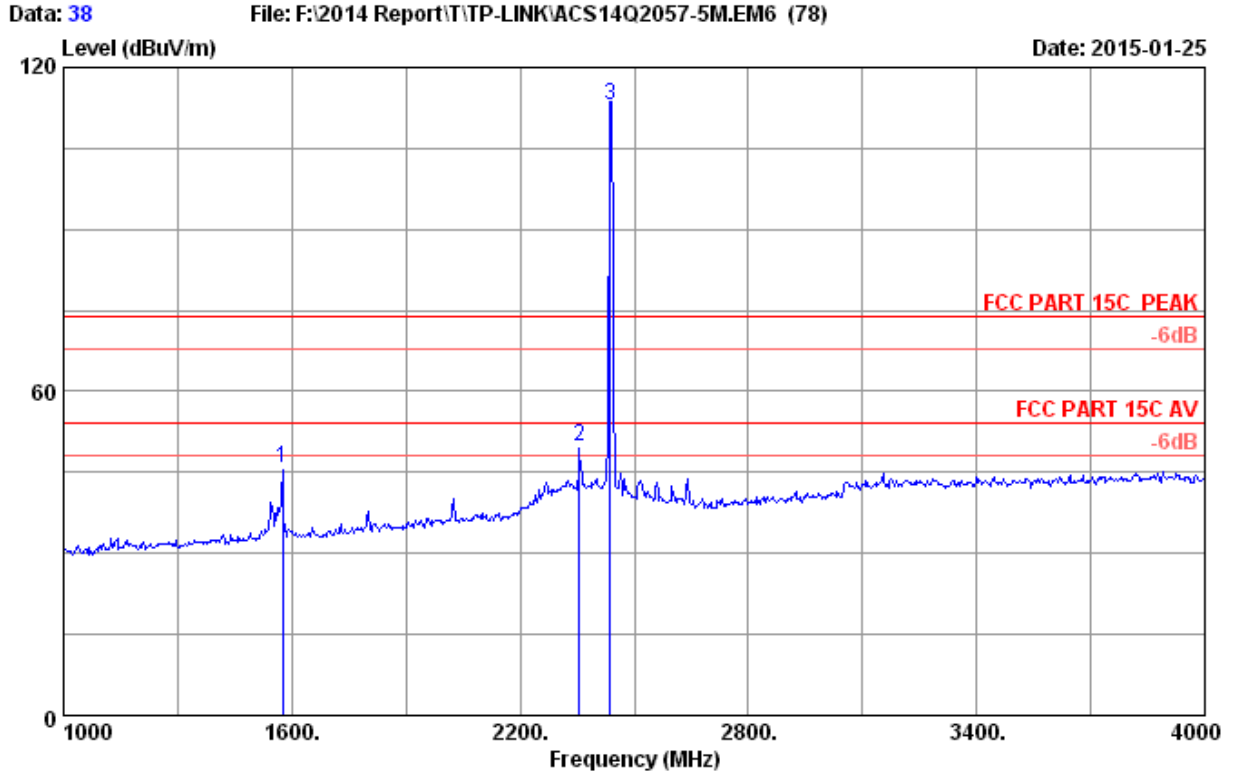


Site no. : 3m Chamber Data no. : 38
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2437MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	51.79	45.74	74.00	28.26	Peak
2	2356.000	28.08	5.73	35.70	51.59	49.70	74.00	24.30	Peak
3	2437.000	28.26	5.85	35.70	114.65	113.06	74.00	-39.06	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

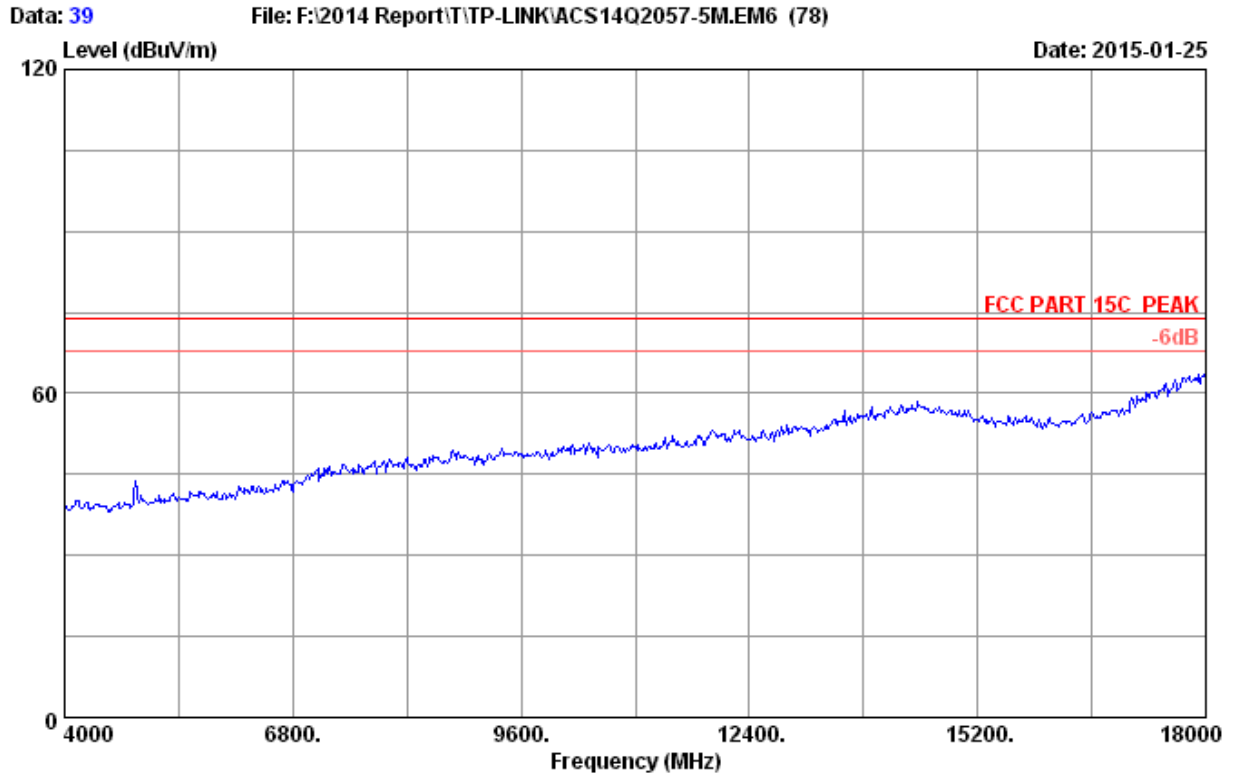


Site no. : 3m Chamber Data no. : 39
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11g 2437MHz Tx
M/N : CPE210

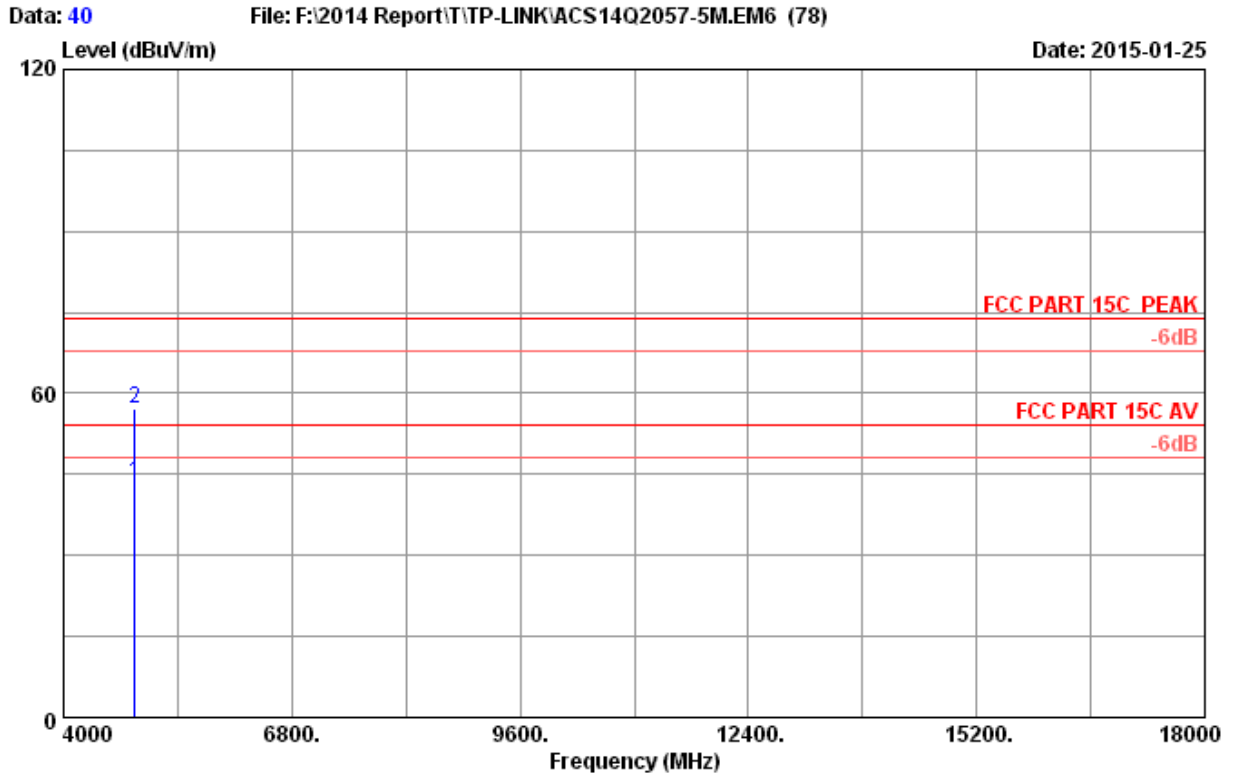


Site no. : 3m Chamber Data no. : 40
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2437MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	32.97	8.63	35.70	37.65	43.55	54.00	10.45	Average
2	4874.000	32.97	8.63	35.70	51.39	57.29	74.00	16.71	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

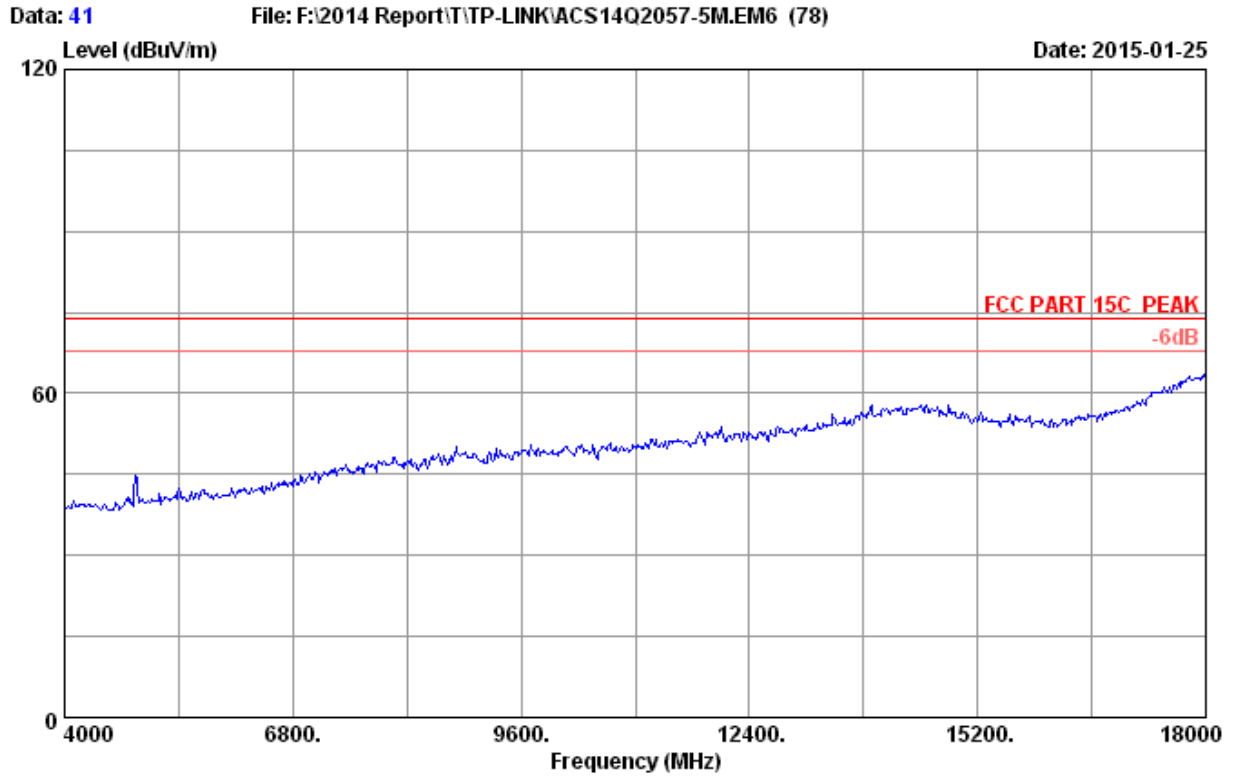


Site no. : 3m Chamber Data no. : 41
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11g 2437MHz Tx
M/N : CPE210

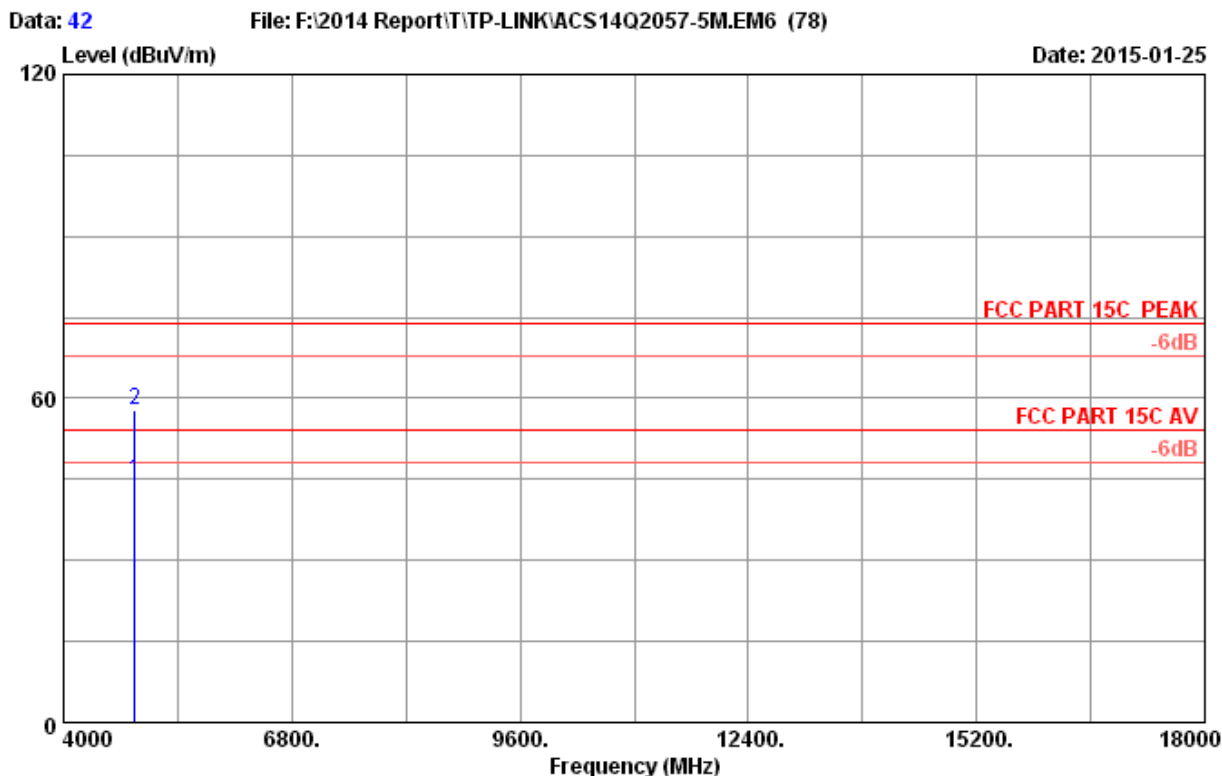

Site no. : 3m Chamber Data no. : 42
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2437MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	32.97	8.63	35.70	38.76	44.66	54.00	9.34	Average
2	4874.000	32.97	8.63	35.70	51.78	57.68	74.00	16.32	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

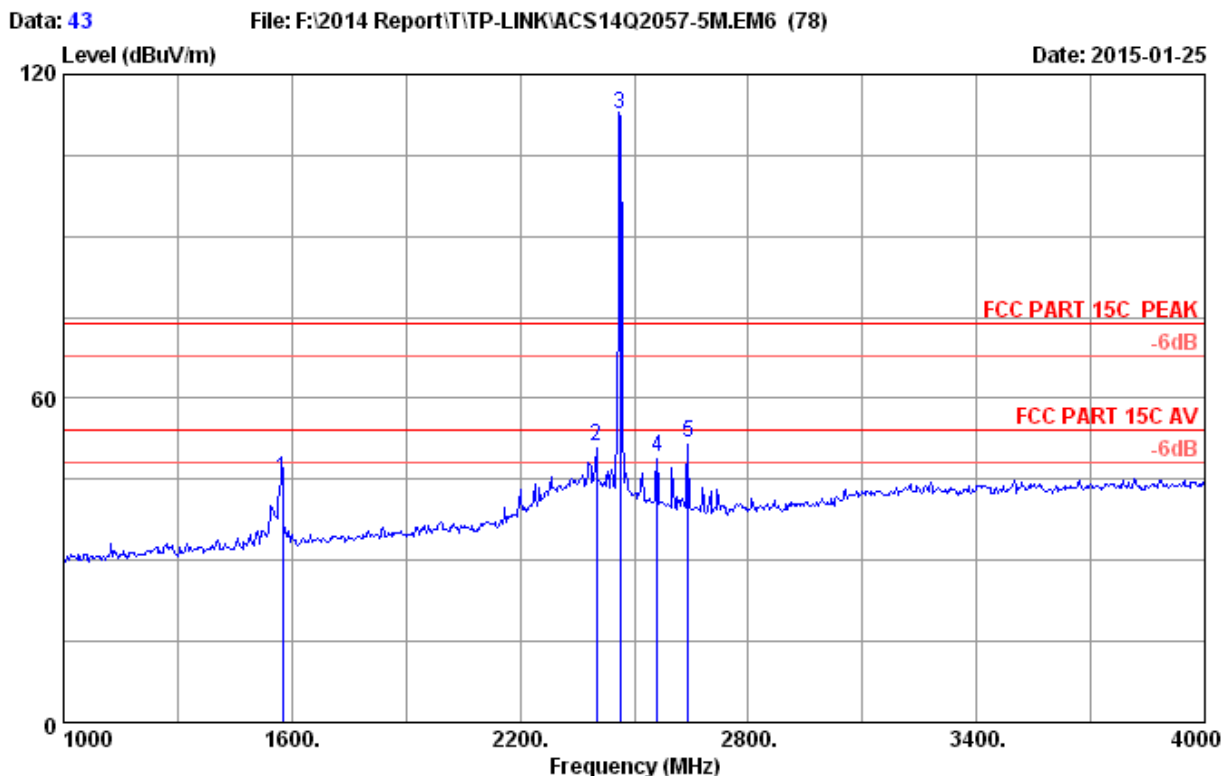

Site no. : 3m Chamber Data no. : 43
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	51.33	45.28	74.00	28.72	Peak
2	2401.000	28.18	5.80	35.70	53.00	51.28	74.00	22.72	Peak
3	2462.000	28.32	5.89	35.70	114.20	112.71	74.00	-38.71	Peak
4	2560.000	28.64	6.03	35.70	50.26	49.23	74.00	24.77	Peak
5	2641.000	28.96	6.15	35.70	52.38	51.79	74.00	22.21	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

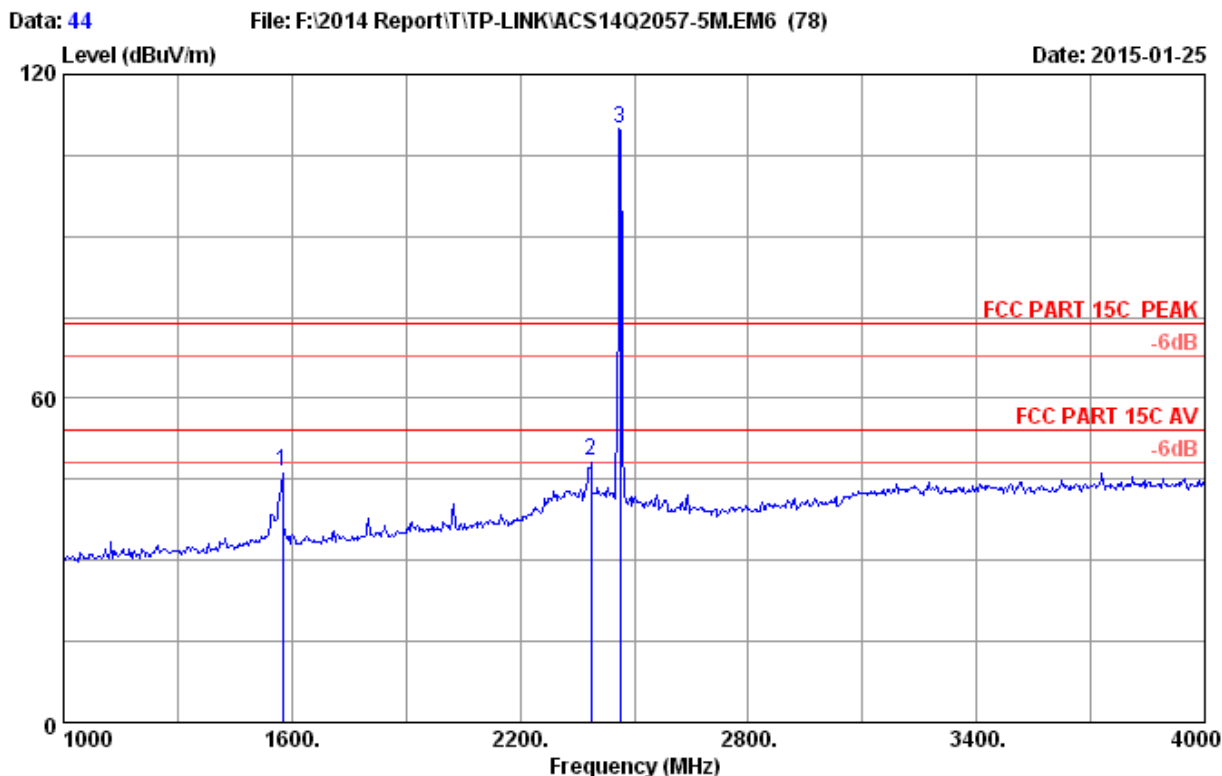


Site no. : 3m Chamber Data no. : 44
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	52.45	46.40	74.00	27.60	Peak
2	2386.000	28.15	5.78	35.70	50.24	48.47	74.00	25.53	Peak
3	2462.000	28.32	5.89	35.70	111.62	110.13	74.00	-36.13	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

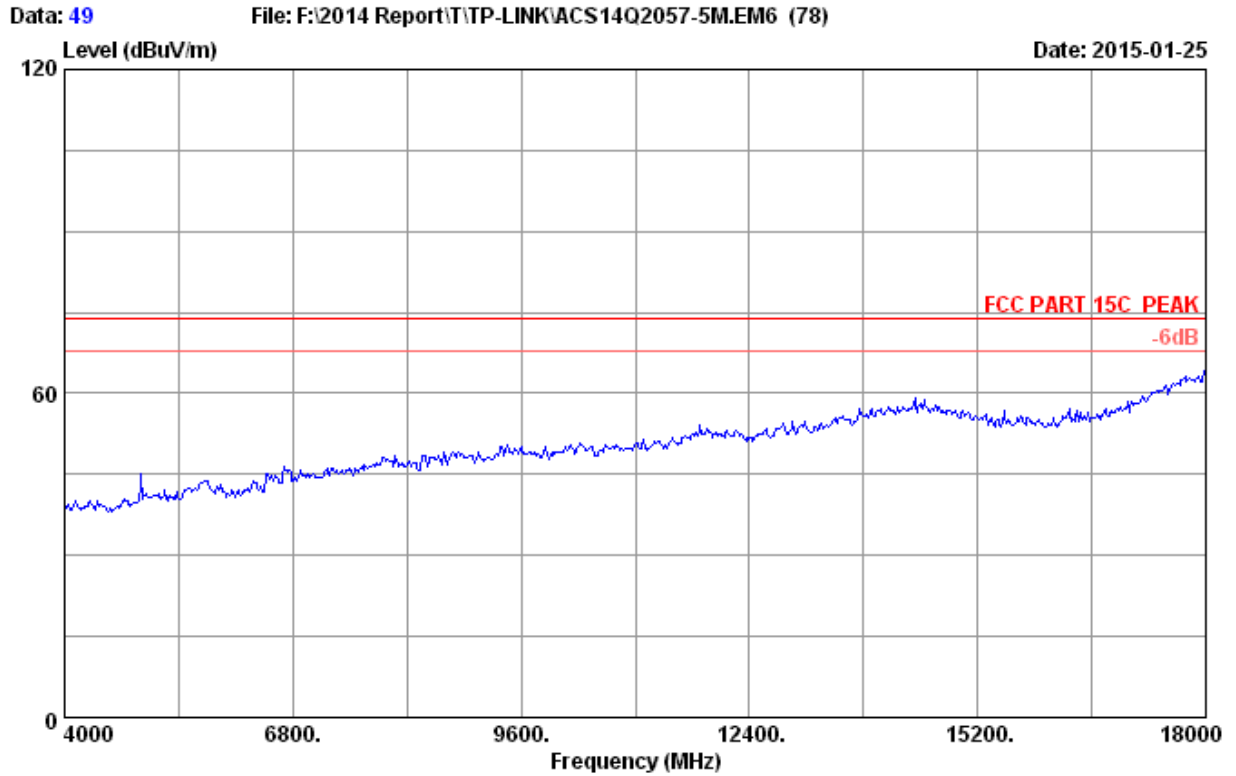


Site no. : 3m Chamber Data no. : 49
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11g 2462MHz Tx
M/N : CPE210

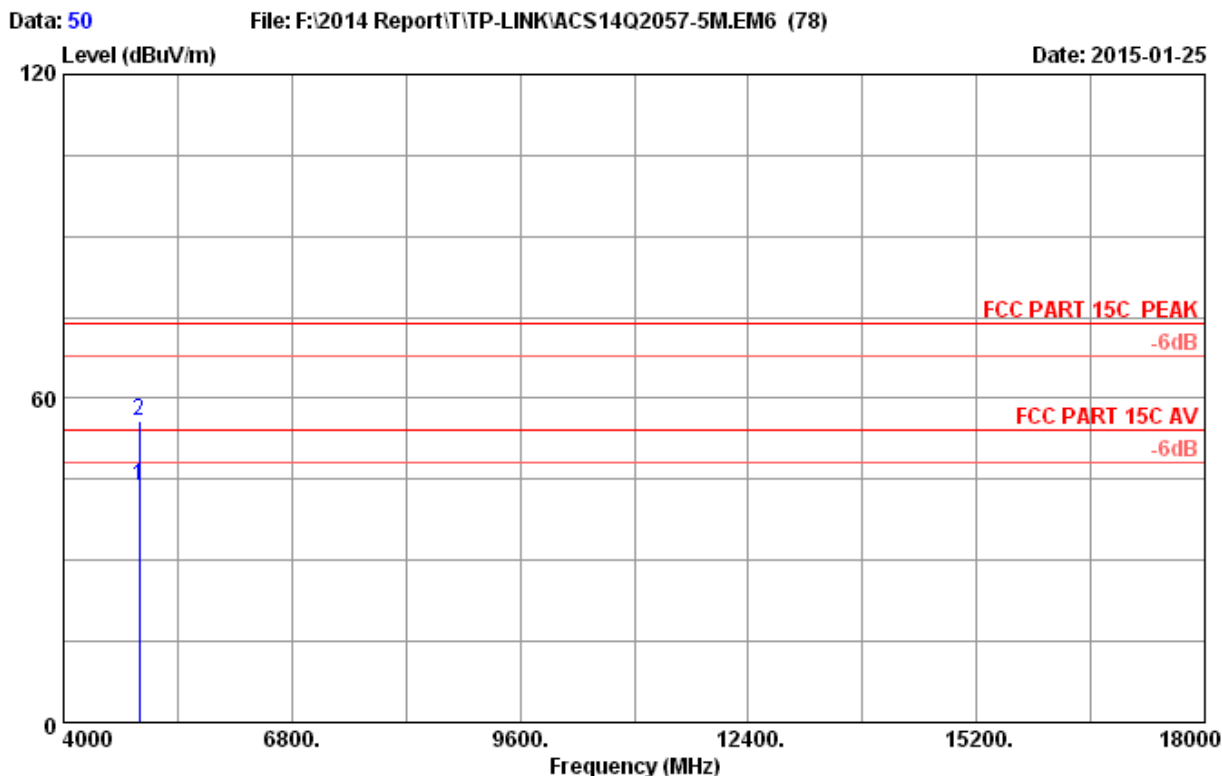


Site no. : 3m Chamber Data no. : 50
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.000	33.06	8.69	35.70	37.77	43.82	54.00	10.18	Average
2	4924.000	33.06	8.69	35.70	49.82	55.87	74.00	18.13	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

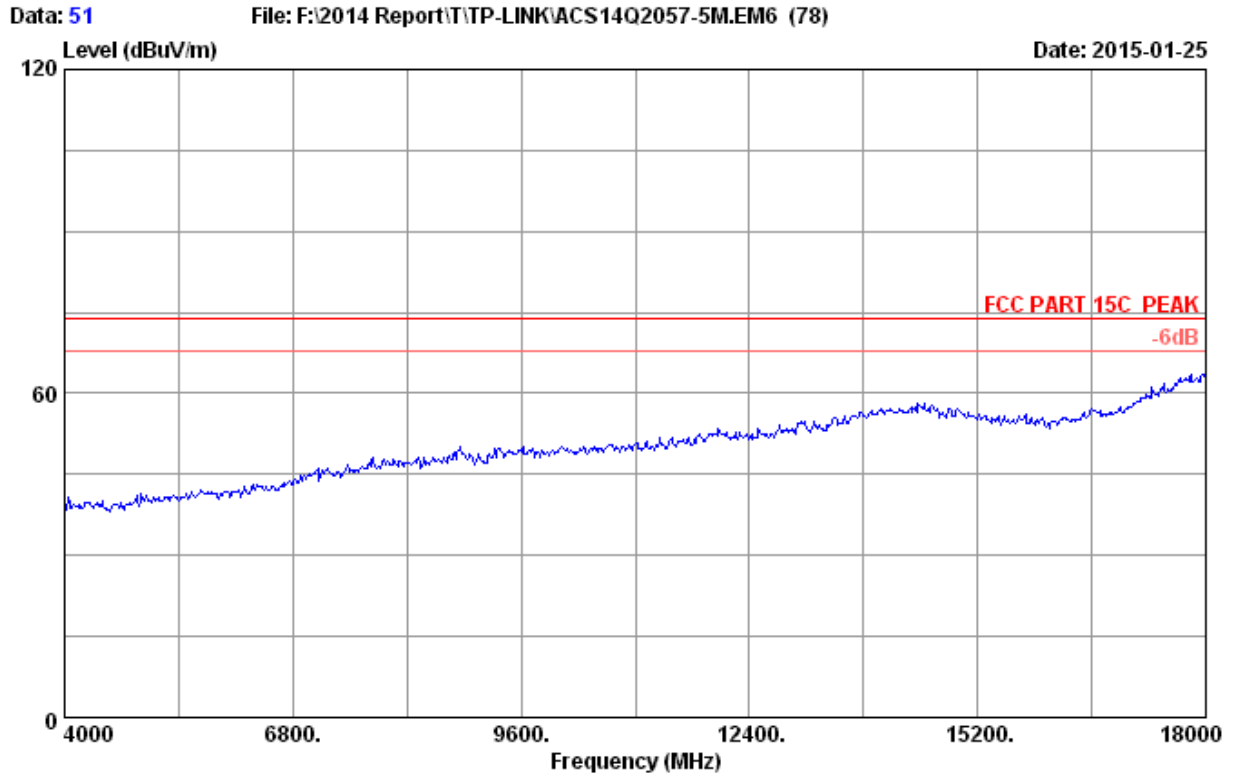


Site no. : 3m Chamber Data no. : 51
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11g 2462MHz Tx
M/N : CPE210

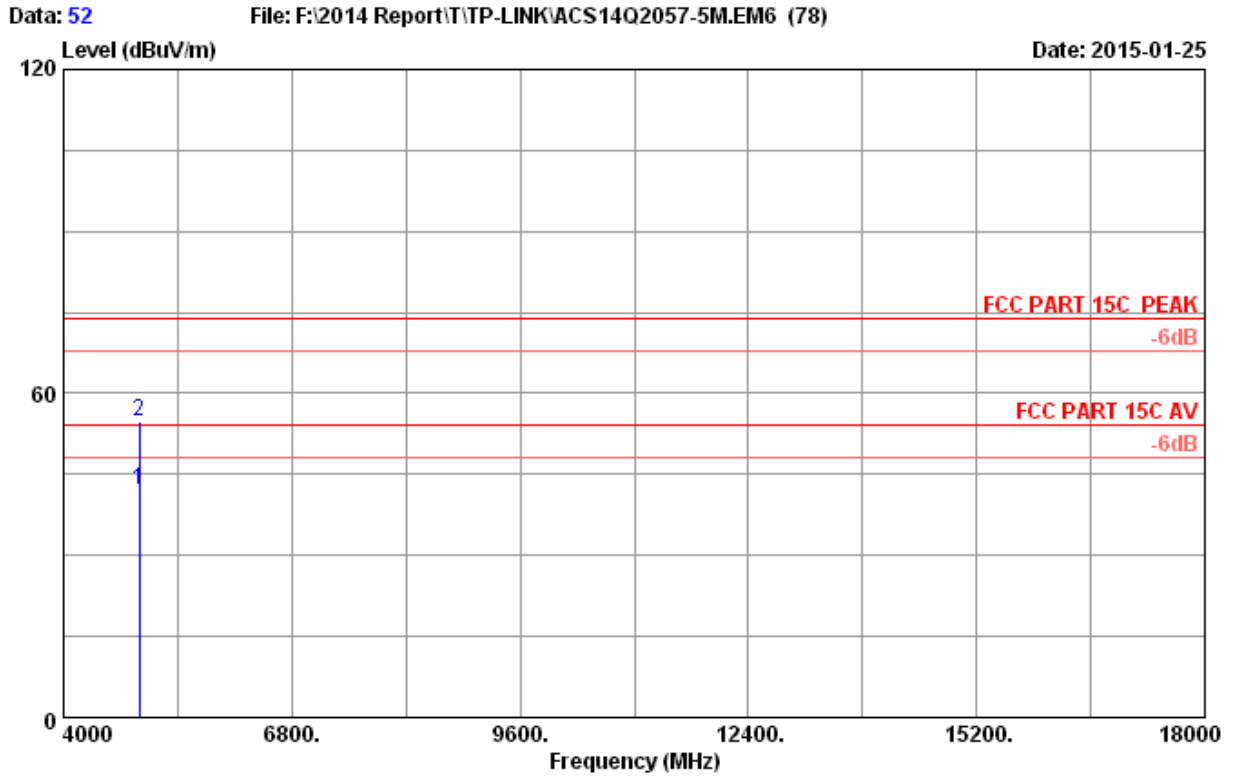

Site no. : 3m Chamber Data no. : 52
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.000	33.06	8.69	35.70	36.15	42.20	54.00	11.80	Average
2	4924.000	33.06	8.69	35.70	48.61	54.66	74.00	19.34	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

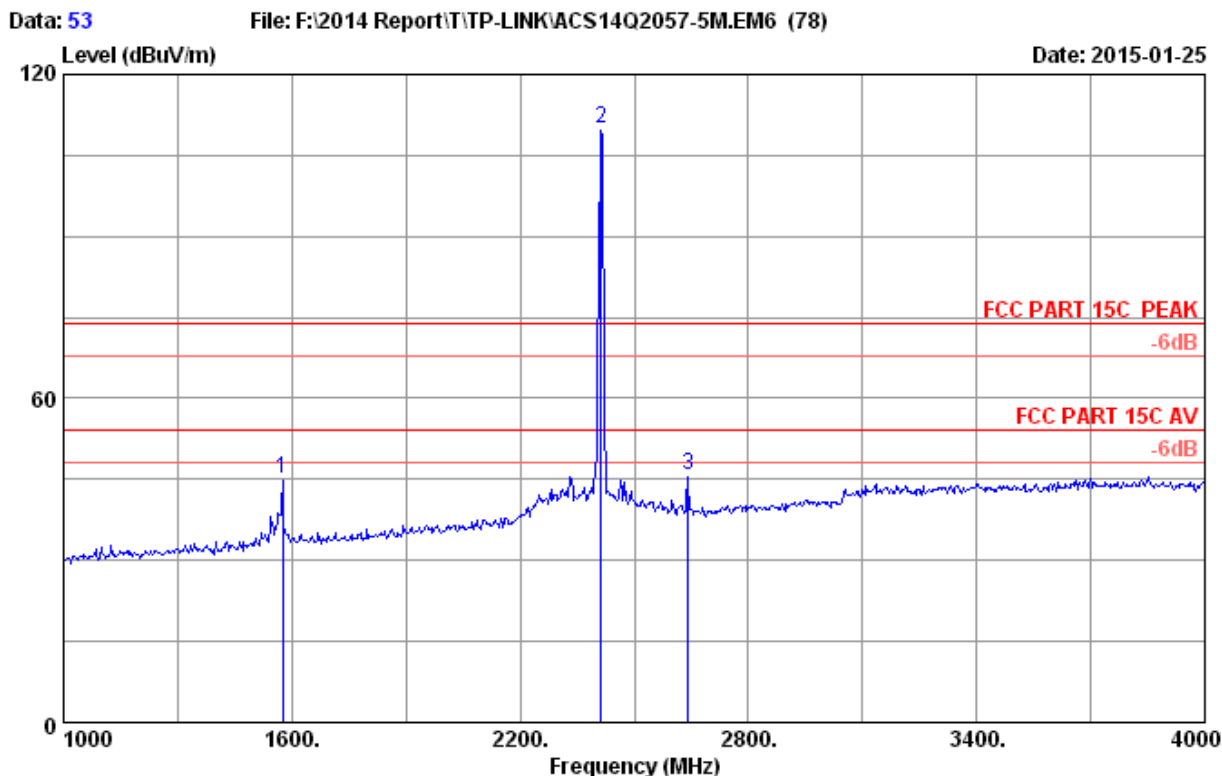


```

Site no.       : 3m Chamber                      Data no.   : 53
Dis. / Ant.   : 3m 2014 3115 (4580)             Ant. pol.  : VERTICAL
Limit         : FCC PART 15C PEAK
Env. / Ins.   : 23*C/54%
Engineer      : Alice_Yang
EUT           : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating  : DC 24V From POE Input AC 120V/60Hz
Test Mode     : IEEE802.11n HT20 2412MHz Tx
M/N          : CPE210
    
```

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	51.22	45.17	74.00	28.83	Peak
2	2412.000	28.21	5.81	35.70	111.64	109.96	74.00	-35.96	Peak
3	2641.000	28.96	6.15	35.70	46.33	45.74	74.00	28.26	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

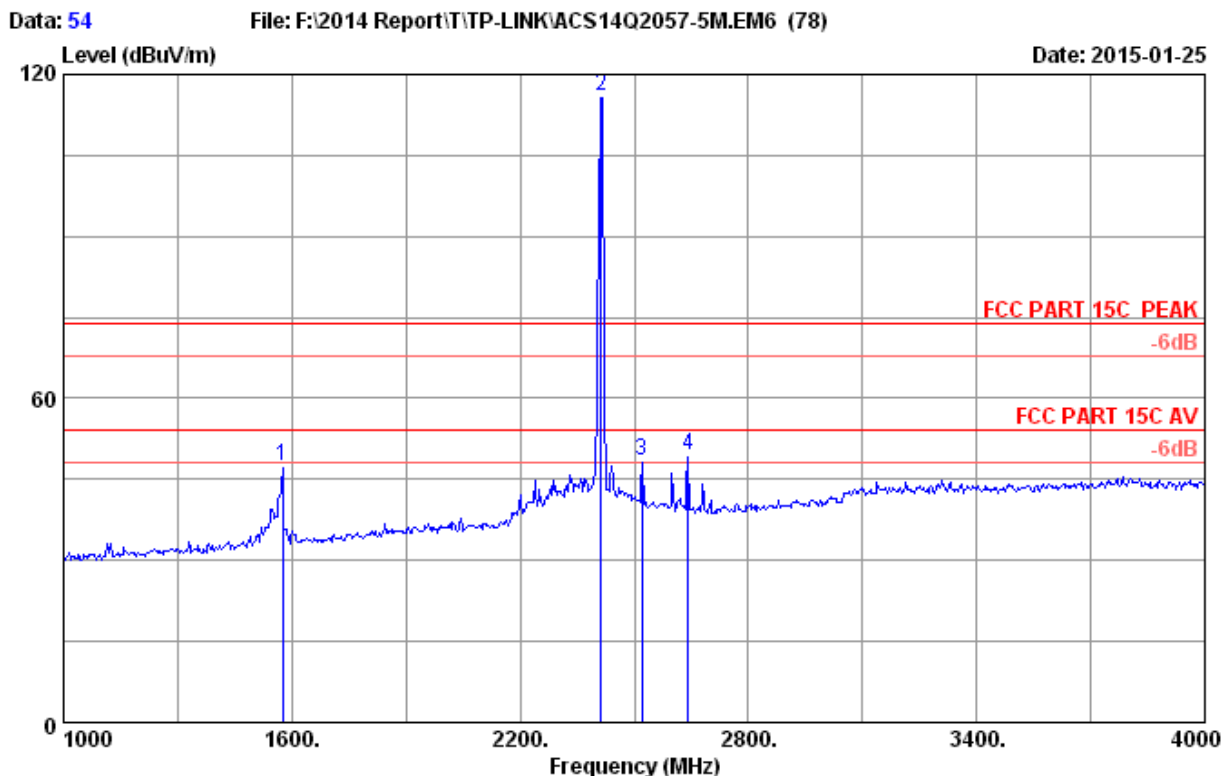


Site no. : 3m Chamber Data no. : 54
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	53.41	47.36	74.00	26.64	Peak
2	2412.000	28.21	5.81	35.70	117.52	115.84	74.00	-41.84	Peak
3	2521.000	28.48	5.97	35.70	49.63	48.38	74.00	25.62	Peak
4	2641.000	28.96	6.15	35.70	50.03	49.44	74.00	24.56	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.




Site no. : 3m Chamber Data no. : 59
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11n HT20 2412MHz Tx
M/N : CPE210

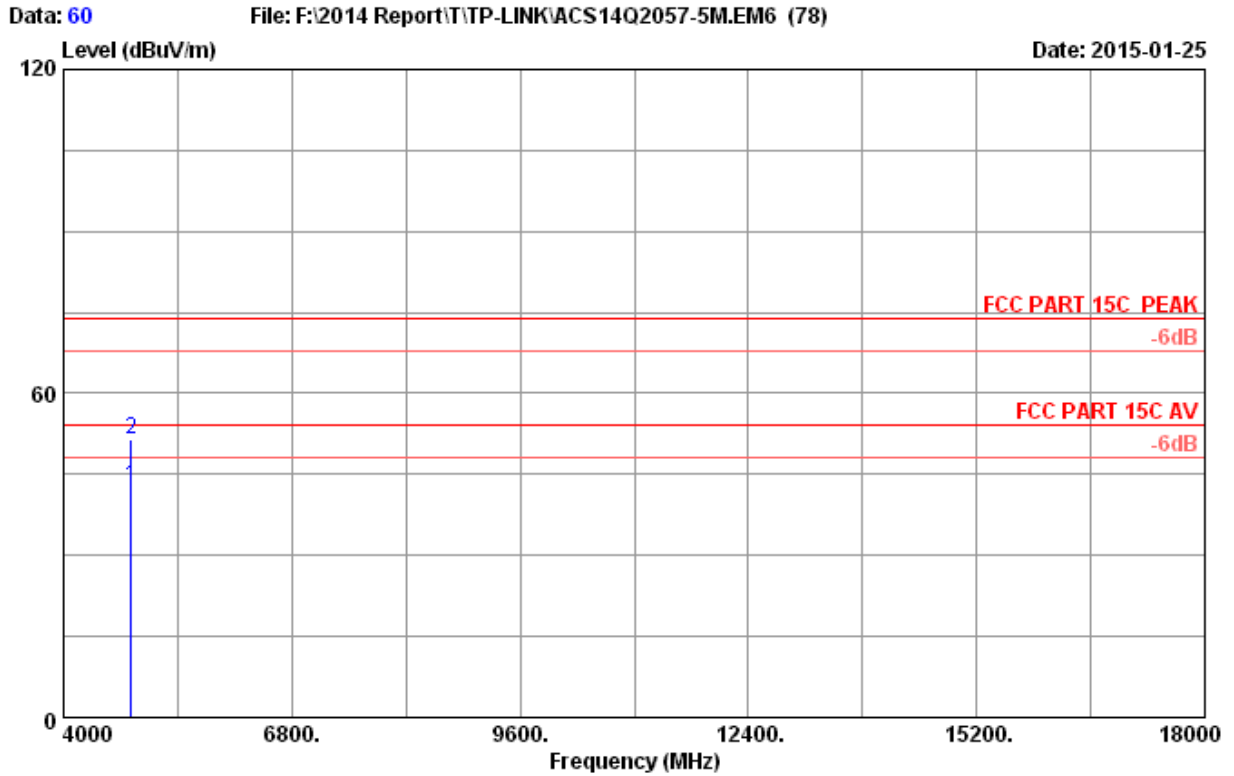


Site no. : 3m Chamber Data no. : 60
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	32.88	8.58	35.70	37.02	42.78	54.00	11.22	Average
2	4824.000	32.88	8.58	35.70	45.83	51.59	74.00	22.41	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

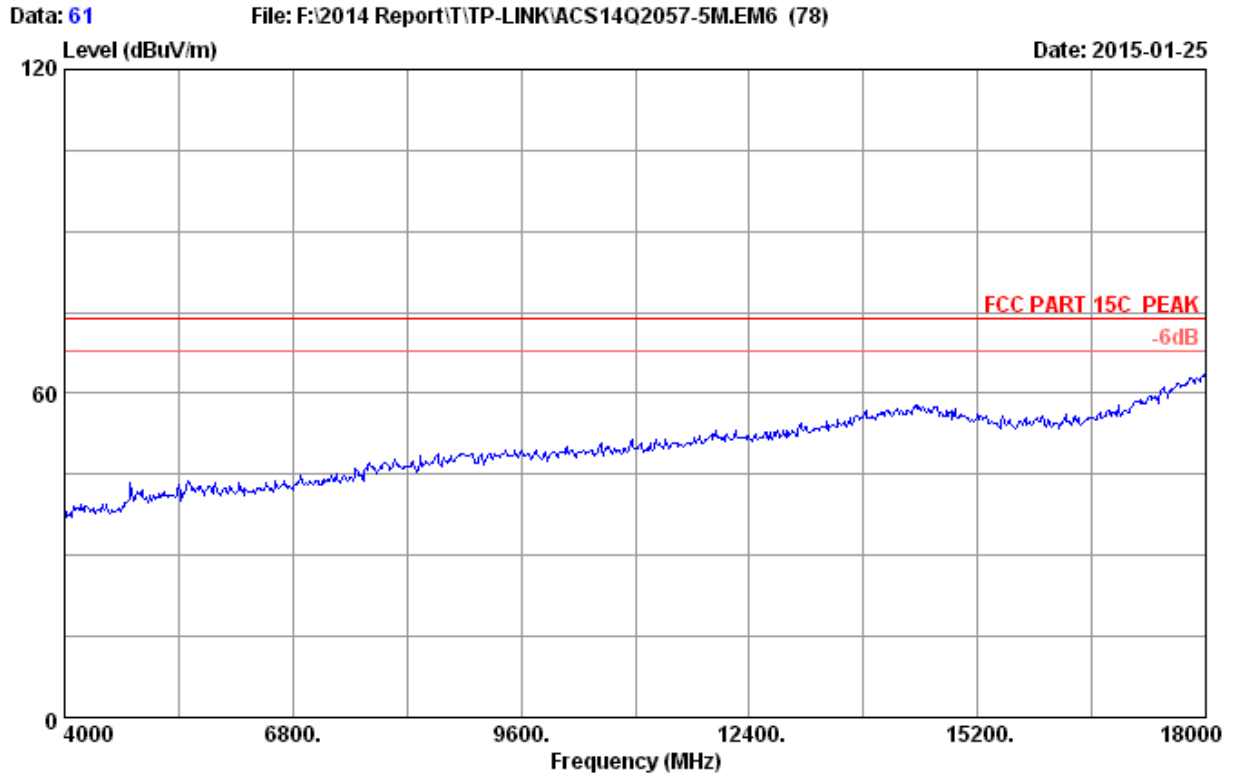


Site no. : 3m Chamber Data no. : 61
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11n HT20 2412MHz Tx
M/N : CPE210

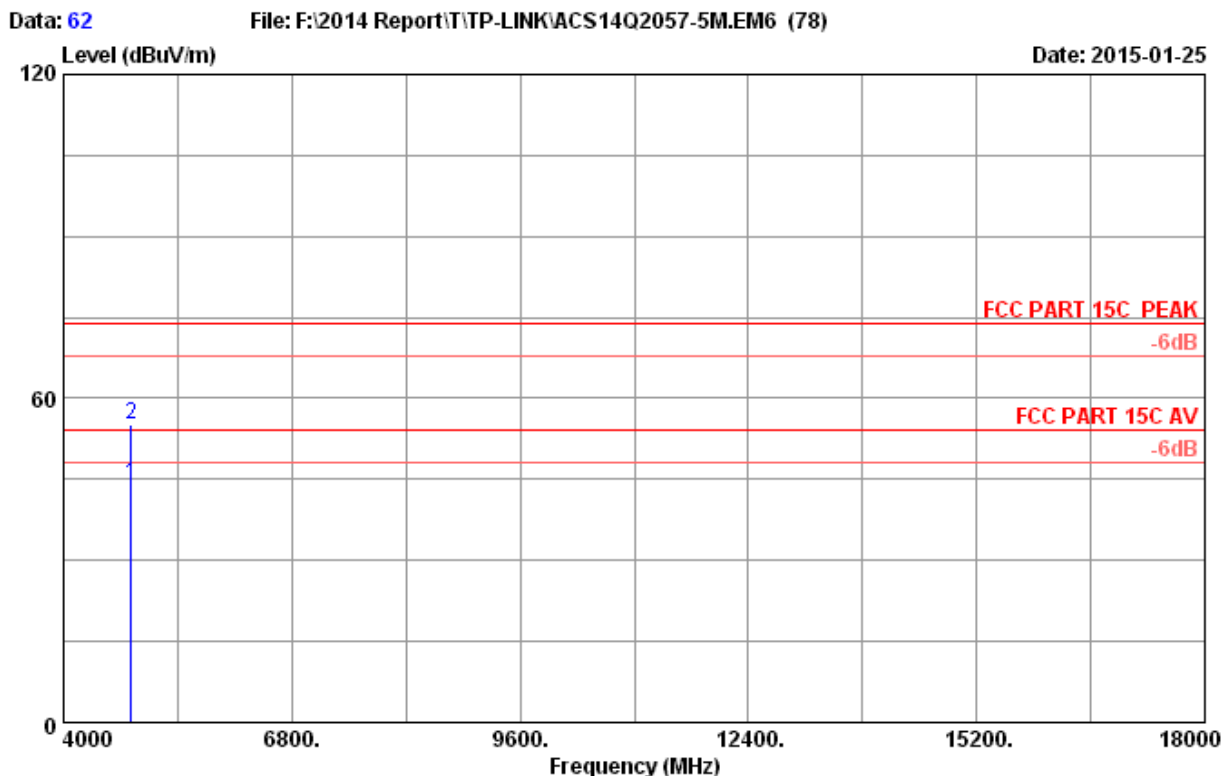

Site no. : 3m Chamber Data no. : 62
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	32.88	8.58	35.70	38.25	44.01	54.00	9.99	Average
2	4824.000	32.88	8.58	35.70	49.51	55.27	74.00	18.73	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

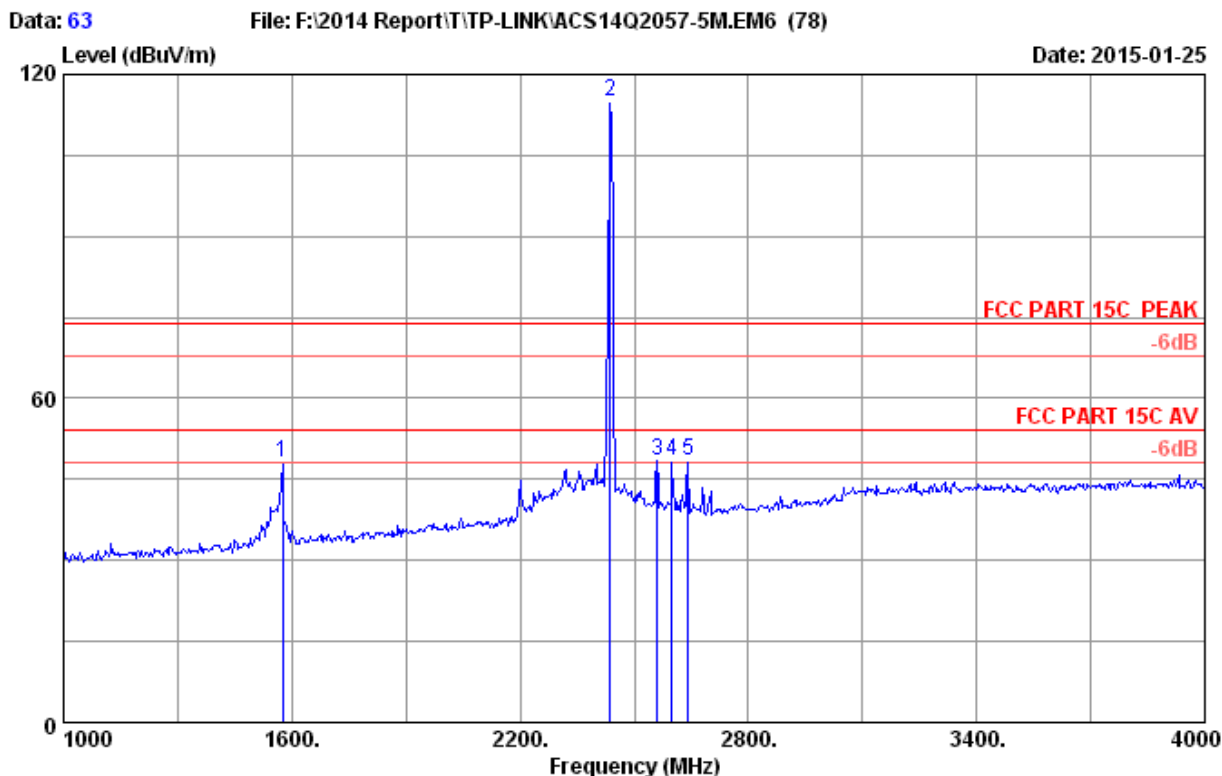

Site no. : 3m Chamber Data no. : 63
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 2437MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	54.29	48.24	74.00	25.76	Peak
2	2437.000	28.26	5.85	35.70	116.57	114.98	74.00	-40.98	Peak
3	2560.000	28.64	6.03	35.70	49.45	48.42	74.00	25.58	Peak
4	2599.000	28.80	6.09	35.70	49.27	48.46	74.00	25.54	Peak
5	2641.000	28.96	6.15	35.70	49.05	48.46	74.00	25.54	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

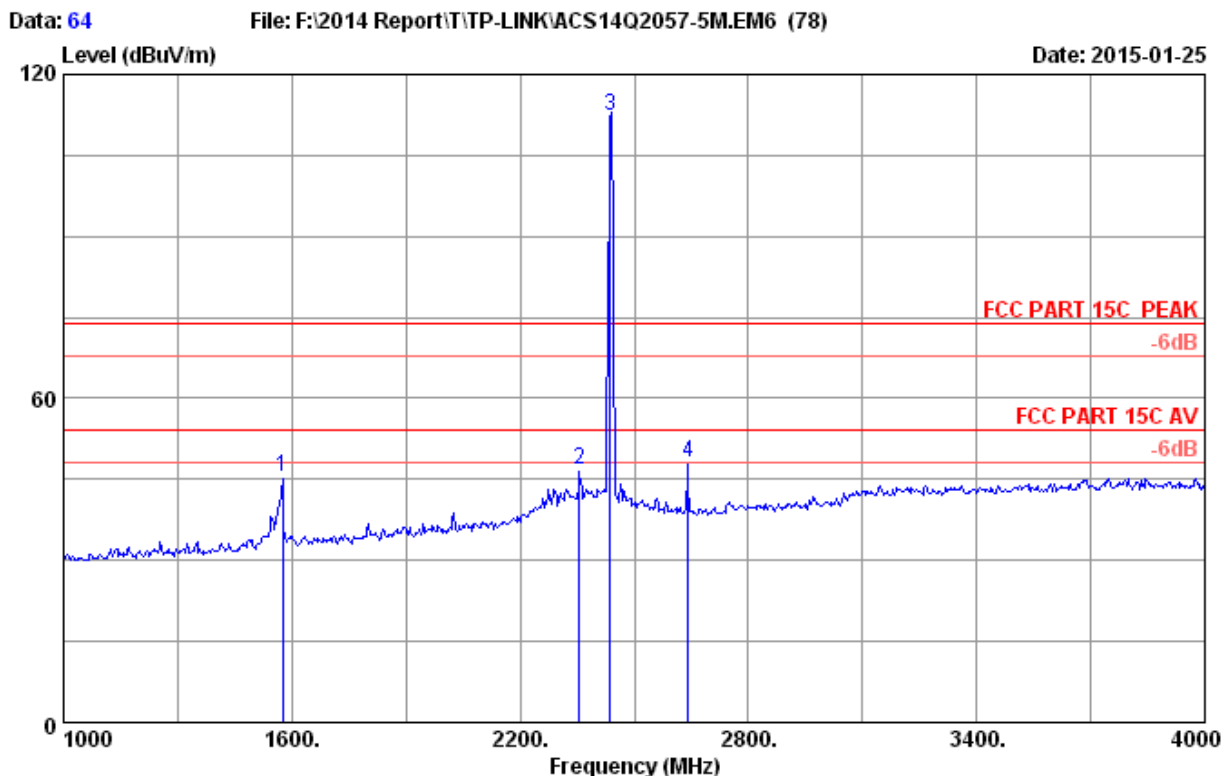


```


Site no.      : 3m Chamber                      Data no.   : 64
Dis. / Ant.  : 3m 2014 3115 (4580)             Ant. pol.  : VERTICAL
Limit        : FCC PART 15C PEAK
Env. / Ins.  : 23*C/54%
Engineer     : Alice_Yang
EUT          : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode    : IEEE802.11n HT20 2437MHz Tx
M/N          : CPE210
    
```

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	51.48	45.43	74.00	28.57	Peak
2	2356.000	28.08	5.73	35.70	48.72	46.83	74.00	27.17	Peak
3	2437.000	28.26	5.85	35.70	113.75	112.16	74.00	-38.16	Peak
4	2641.000	28.96	6.15	35.70	48.75	48.16	74.00	25.84	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

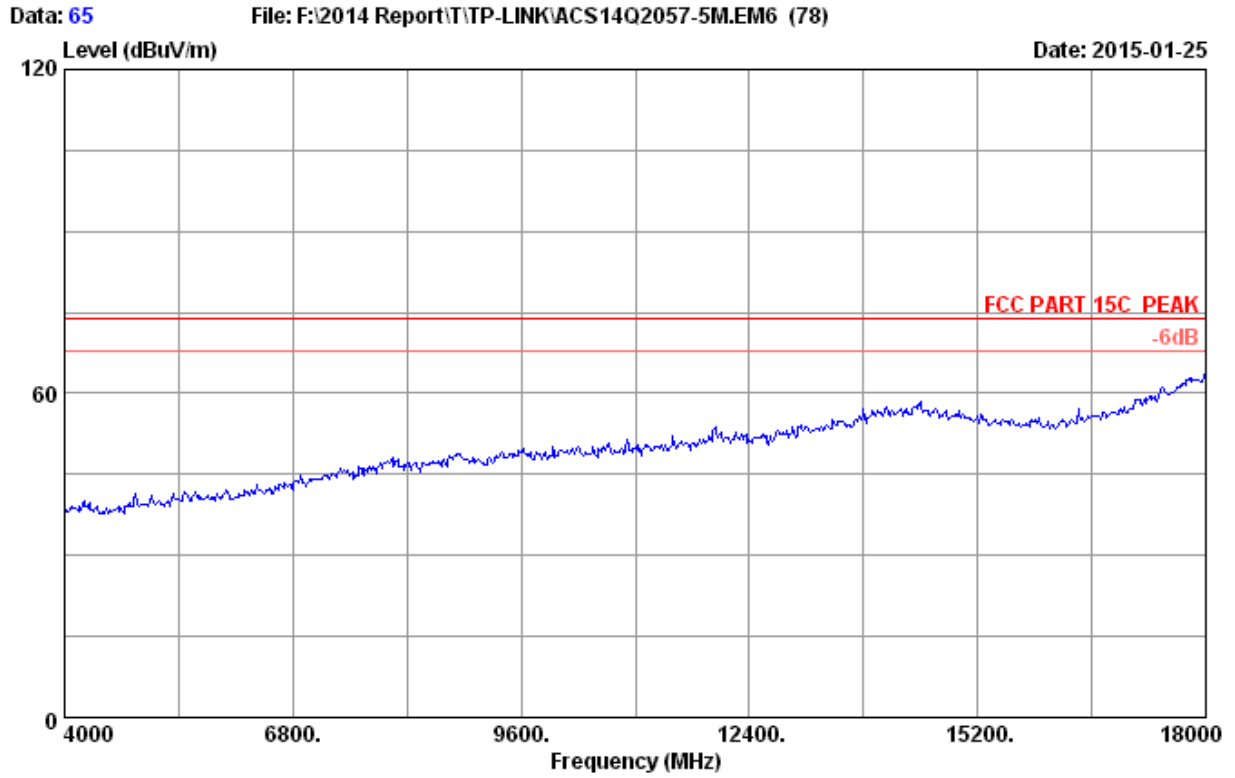


Site no. : 3m Chamber Data no. : 65
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11n HT20 2437MHz Tx
M/N : CPE210

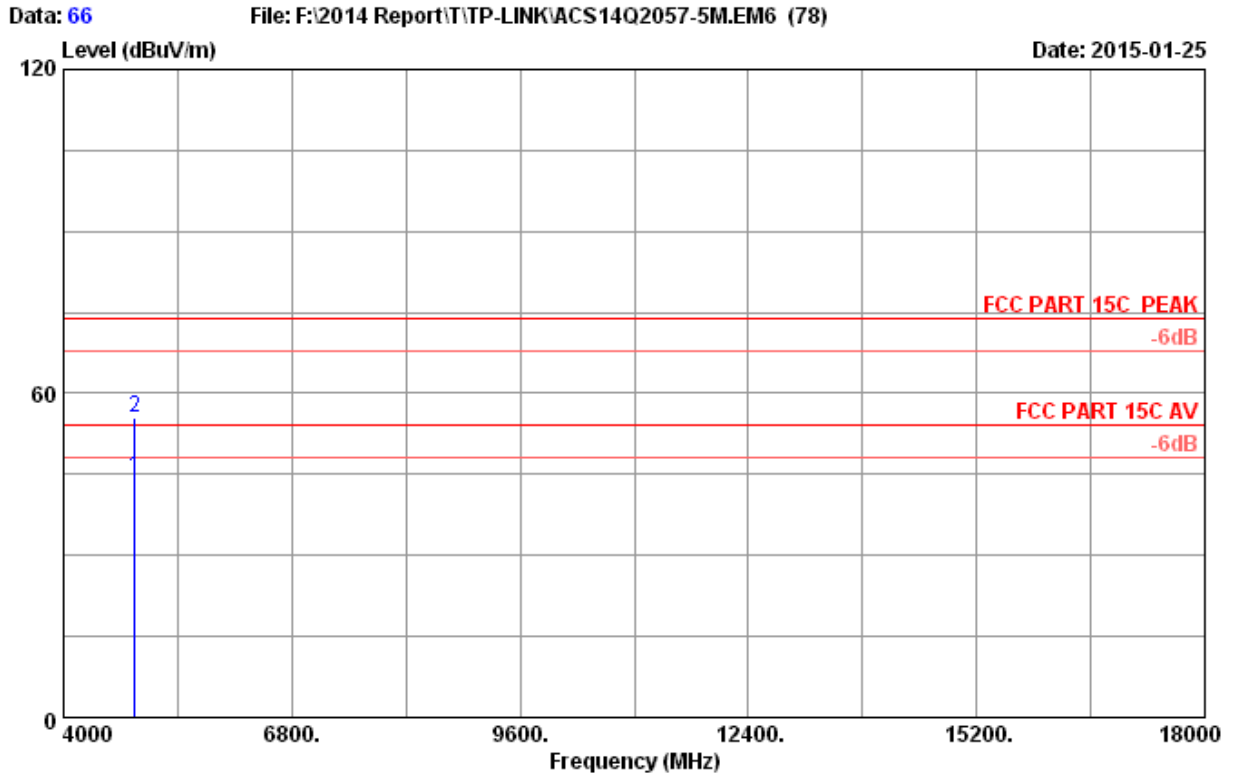


Site no. : 3m Chamber Data no. : 66
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 2437MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	32.97	8.63	35.70	38.65	44.55	54.00	9.45	Average
2	4874.000	32.97	8.63	35.70	49.58	55.48	74.00	18.52	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

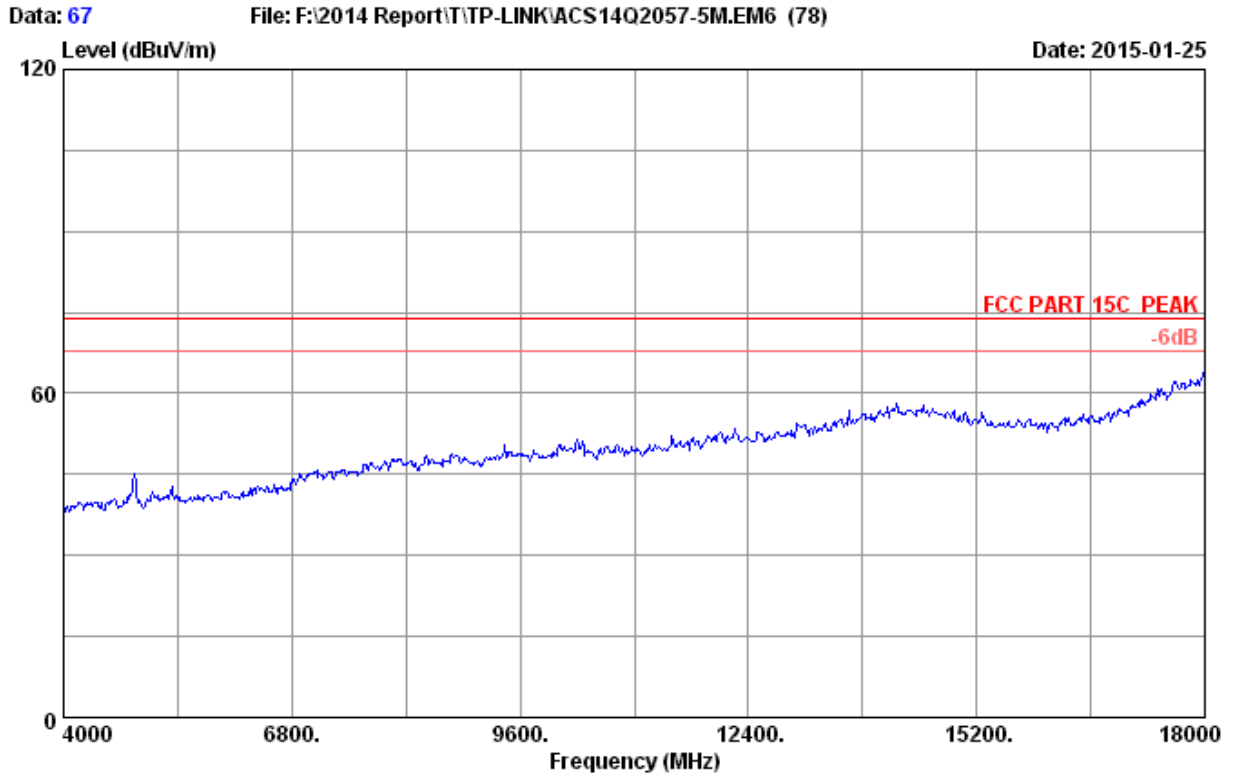


Site no. : 3m Chamber Data no. : 67
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11n HT20 2437MHz Tx
M/N : CPE210

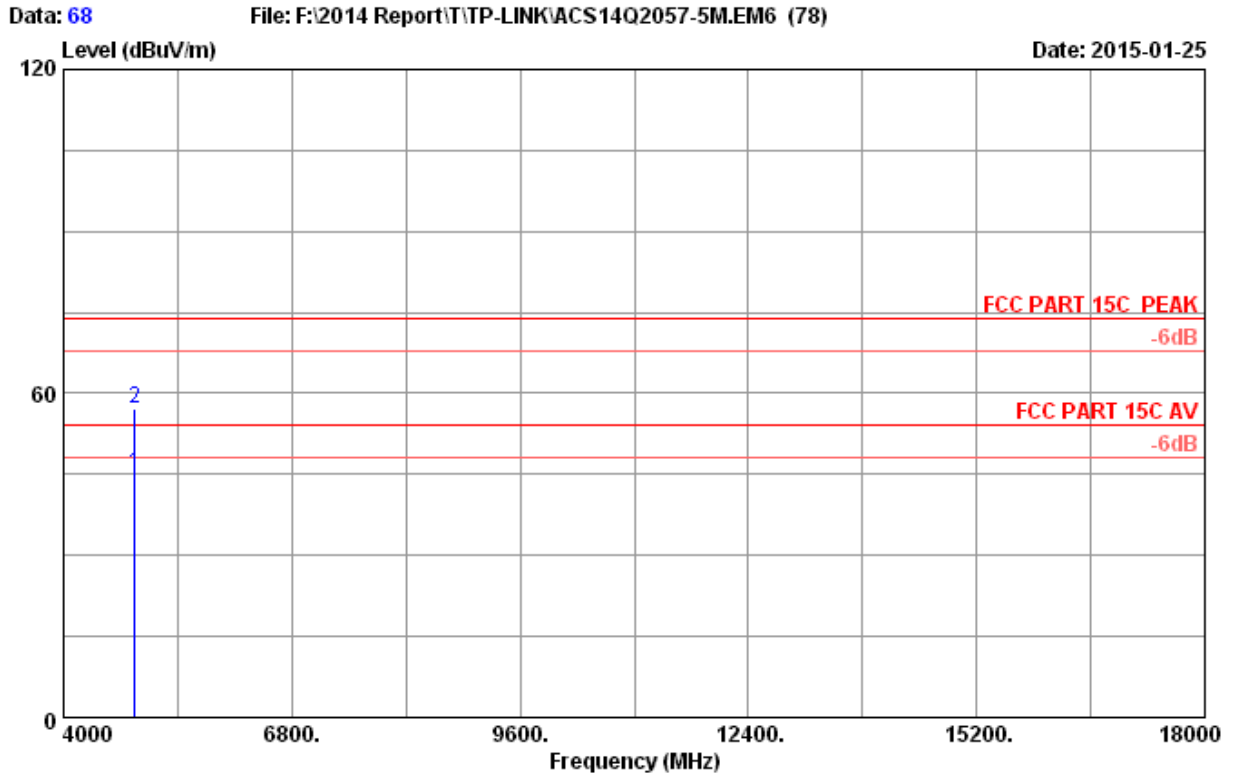

Site no. : 3m Chamber Data no. : 68
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 2437MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	32.97	8.63	35.70	39.13	45.03	54.00	8.97	Average
2	4874.000	32.97	8.63	35.70	51.37	57.27	74.00	16.73	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

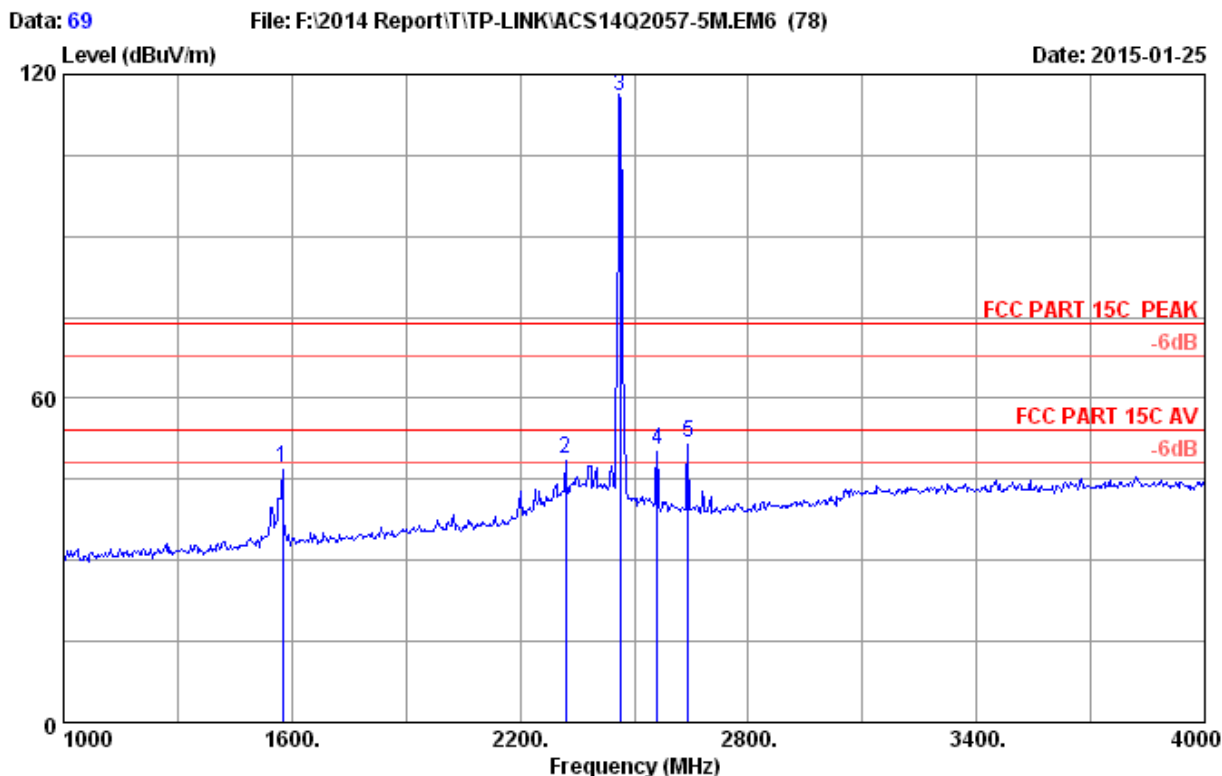

Site no. : 3m Chamber Data no. : 69
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	53.26	47.21	74.00	26.79	Peak
2	2320.000	28.00	5.68	35.70	50.76	48.74	74.00	25.26	Peak
3	2462.000	28.32	5.89	35.70	117.44	115.95	74.00	-41.95	Peak
4	2560.000	28.64	6.03	35.70	51.48	50.45	74.00	23.55	Peak
5	2641.000	28.96	6.15	35.70	52.49	51.90	74.00	22.10	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

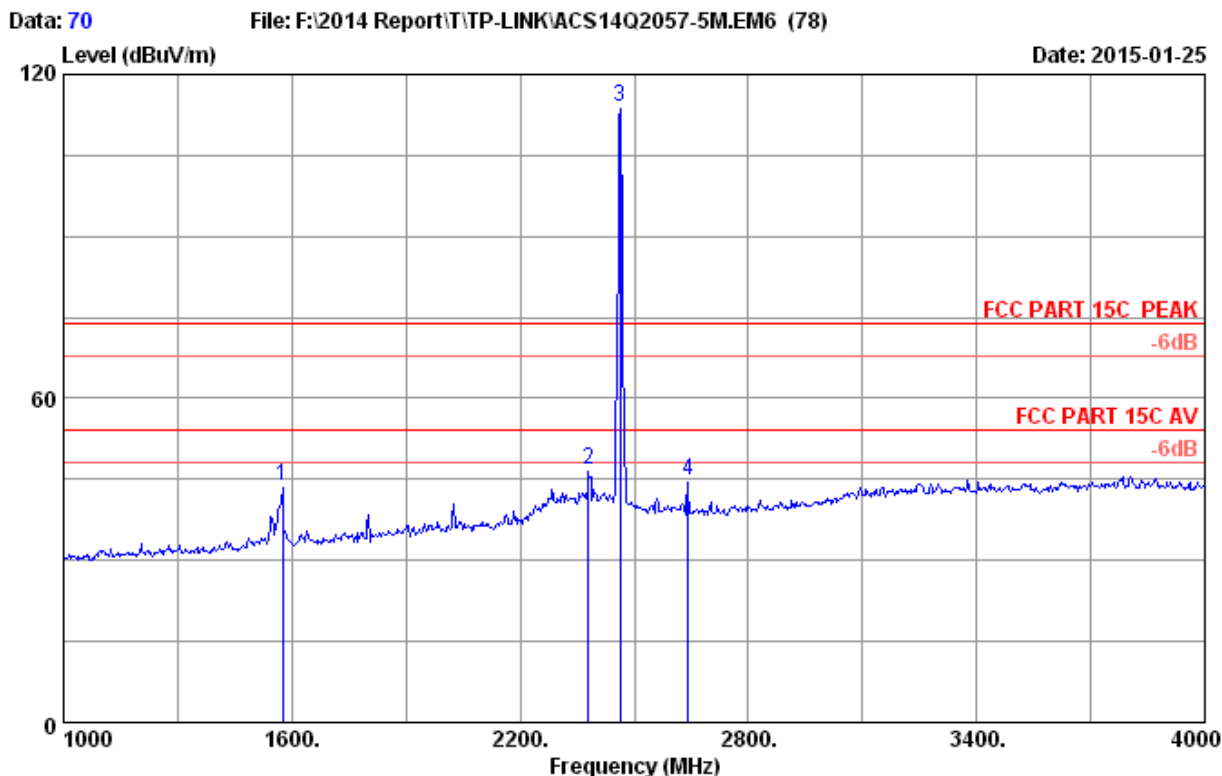


```


Site no.      : 3m Chamber                      Data no.   : 70
Dis. / Ant.  : 3m 2014 3115 (4580)             Ant. pol.  : VERTICAL
Limit        : FCC PART 15C PEAK
Env. / Ins.  : 23*C/54%
Engineer     : Alice_Yang
EUT          : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode    : IEEE802.11n HT20 2462MHz Tx
M/N          : CPE210
    
```

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	49.72	43.67	74.00	30.33	Peak
2	2380.000	28.14	5.77	35.70	48.68	46.89	74.00	27.11	Peak
3	2462.000	28.32	5.89	35.70	115.38	113.89	74.00	-39.89	Peak
4	2641.000	28.96	6.15	35.70	45.33	44.74	74.00	29.26	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

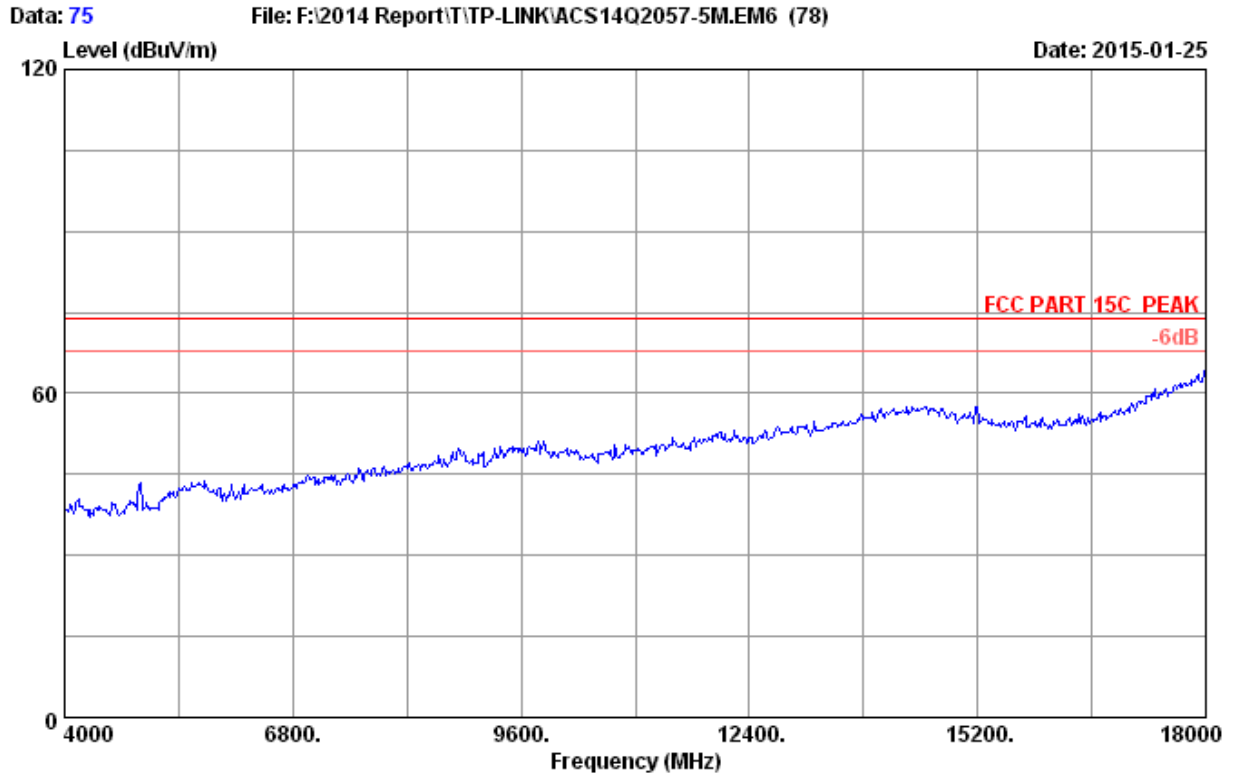


Site no. : 3m Chamber Data no. : 75
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11n HT20 2462MHz Tx
M/N : CPE210

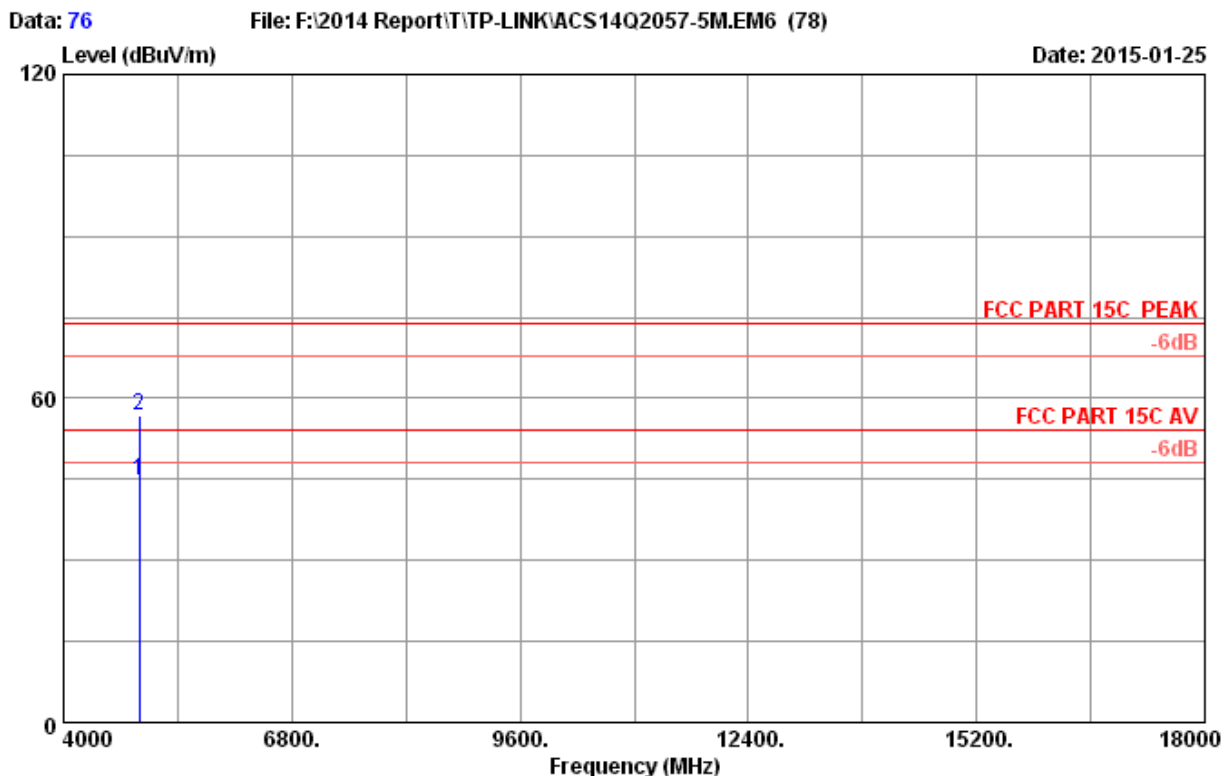


Site no. : 3m Chamber Data no. : 76
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.000	33.06	8.69	35.70	38.75	44.80	54.00	9.20	Average
2	4924.000	33.06	8.69	35.70	50.74	56.79	74.00	17.21	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

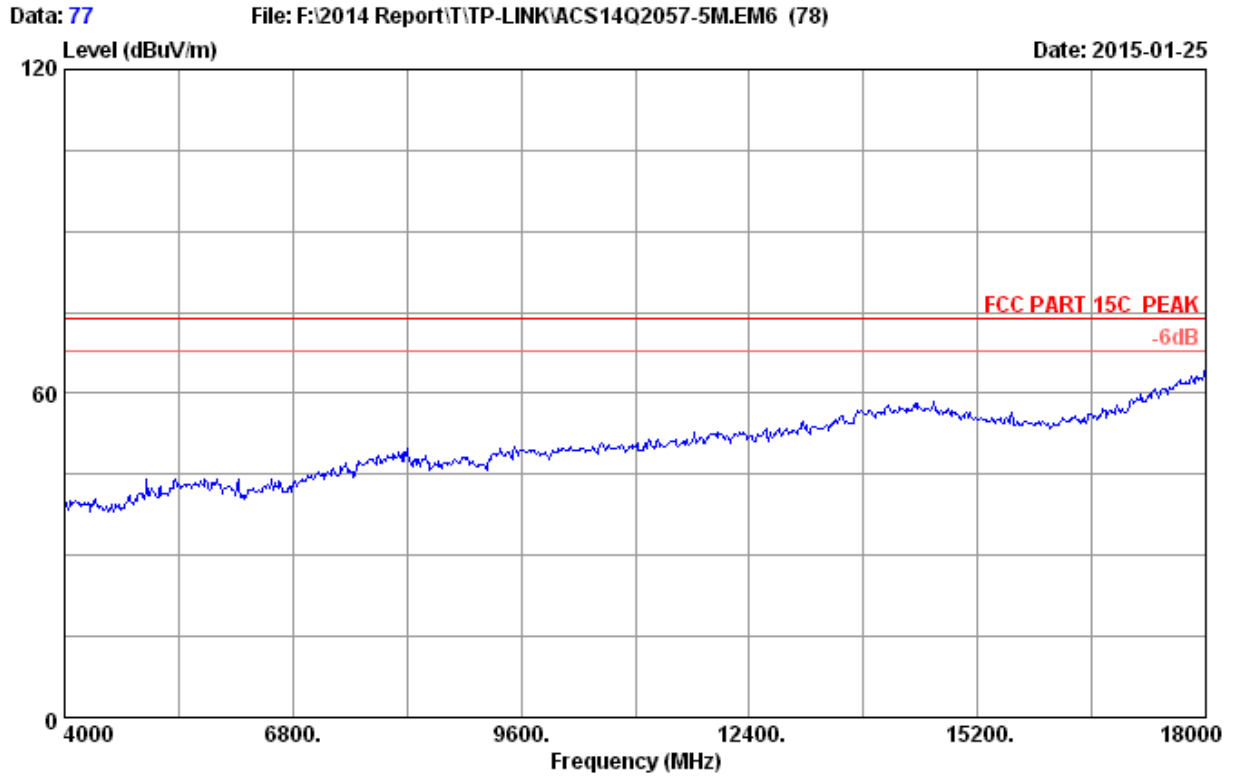

Site no. : 3m Chamber Data no. : 77
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11n HT20 2462MHz Tx
M/N : CPE210

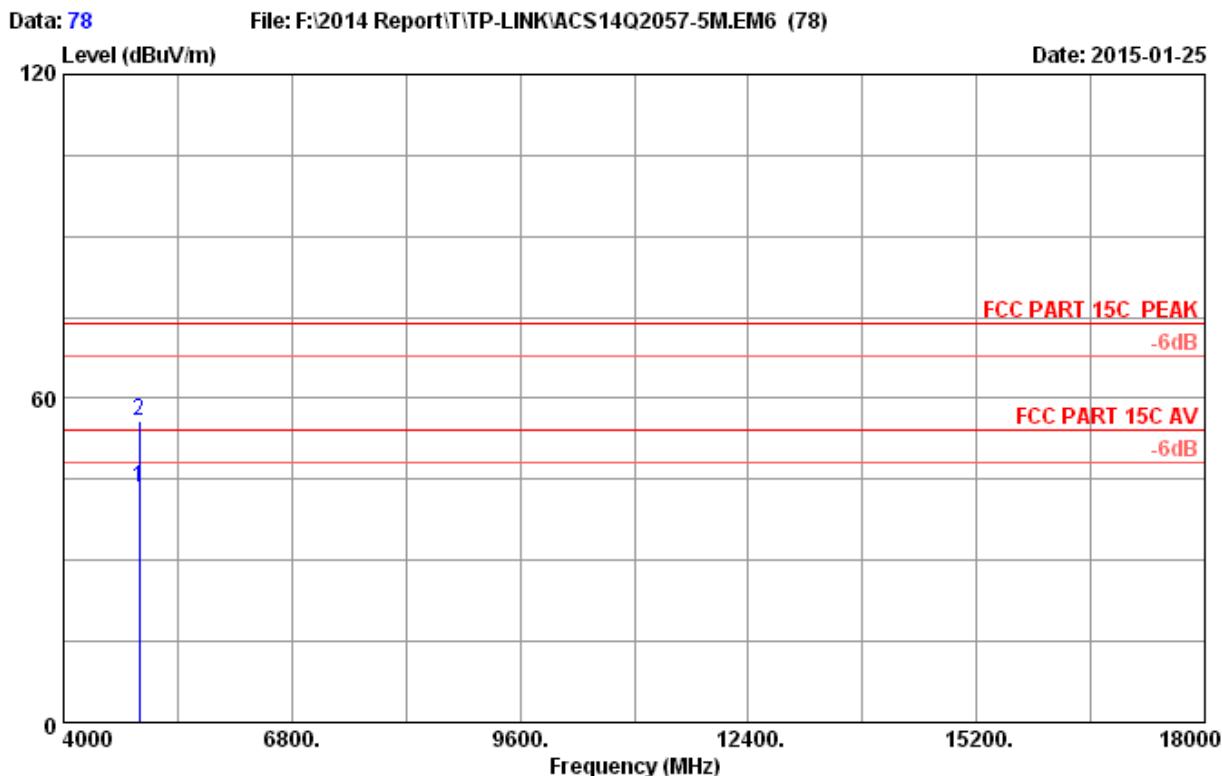

Site no. : 3m Chamber Data no. : 78
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.000	33.06	8.69	35.70	37.24	43.29	54.00	10.71	Average
2	4924.000	33.06	8.69	35.70	49.85	55.90	74.00	18.10	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

10MHz
Frequency: 30MHz~1GHz

Data: 9

File: E:\2014 Report Data\T\TP-LINK\ACS14Q2057.EM6 (18)


Date: 2015-01-25

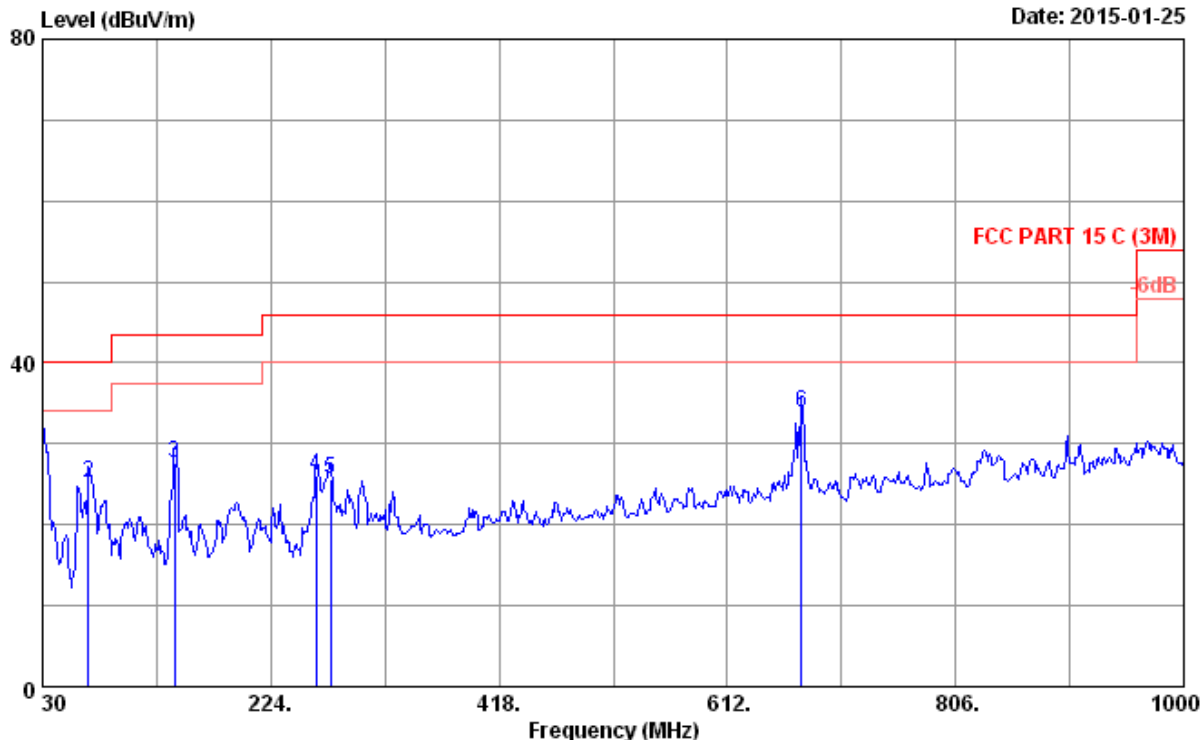

Site no. : 3m Chamber Data no. : 9
 Dis. / Ant. : 3m 2013 CBL6112D 35375 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 22.5°C/47% Engineer : Leo-Li
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : Tx Mode
 M/N:CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	30.000	20.10	0.83	9.44	30.37	40.00	9.63	QP
2	68.800	6.74	1.27	17.07	25.08	40.00	14.92	QP
3	142.520	11.77	1.57	14.25	27.59	43.50	15.91	QP
4	262.800	13.96	2.03	10.02	26.01	46.00	19.99	QP
5	274.440	13.50	2.07	10.14	25.71	46.00	20.29	QP
6	675.050	19.80	3.25	10.92	33.97	46.00	12.03	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

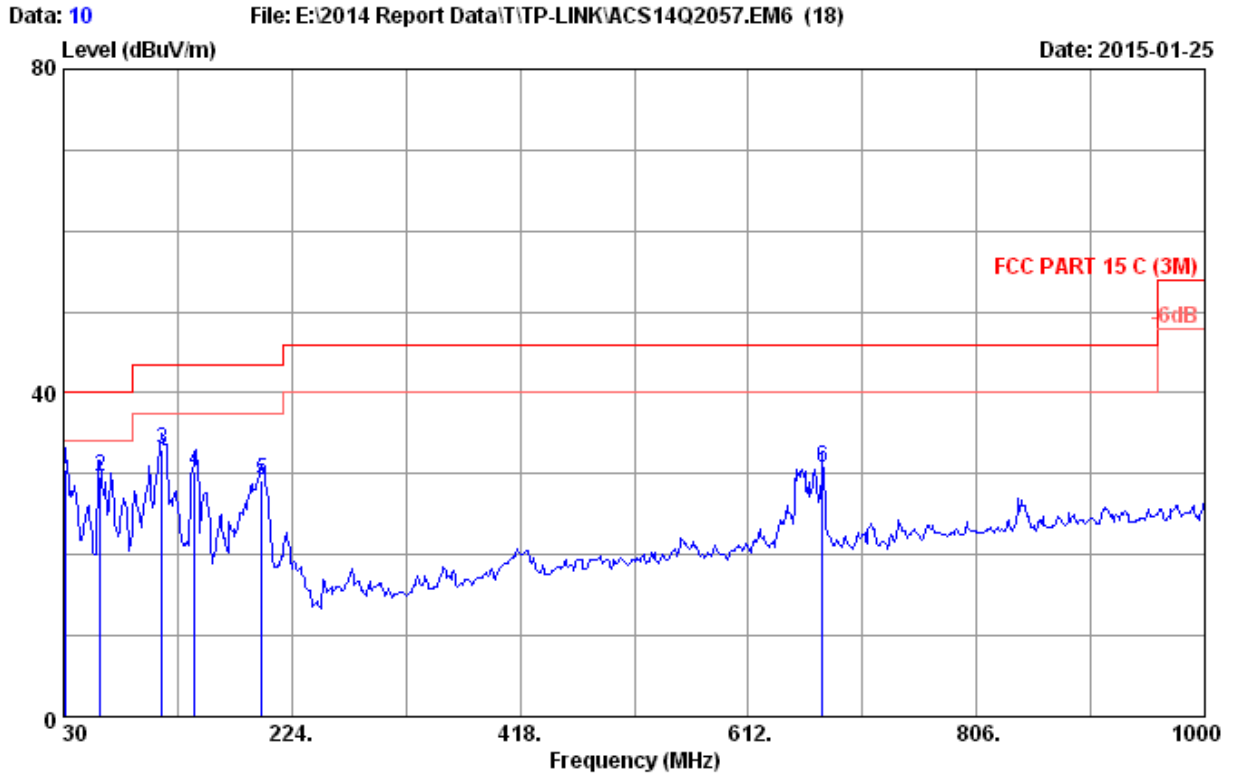

Site no. : 3m Chamber Data no. : 10
 Dis. / Ant. : 3m 2013 CBL6112D 35375 Ant. pol. : VERTICAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 22.5°C/47% Engineer : Leo-Li
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : Tx Mode
 M/N:CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	31.940	18.84	0.86	10.79	30.49	40.00	9.51	QP
2	61.040	6.65	1.24	21.80	29.69	40.00	10.31	QP
3	113.420	12.54	1.46	18.98	32.98	43.50	10.52	QP
4	141.550	11.89	1.57	16.90	30.36	43.50	13.14	QP
5	198.780	10.24	1.79	17.14	29.17	43.50	14.33	QP
6	675.050	19.80	3.25	7.67	30.72	46.00	15.28	QP


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Frequency: 1GHz~18GHz

Data: 1

File: F:\2014 Report\T\TP-LINK\ACS14Q2057-10M.EM6 (78)


Date: 2015-01-25

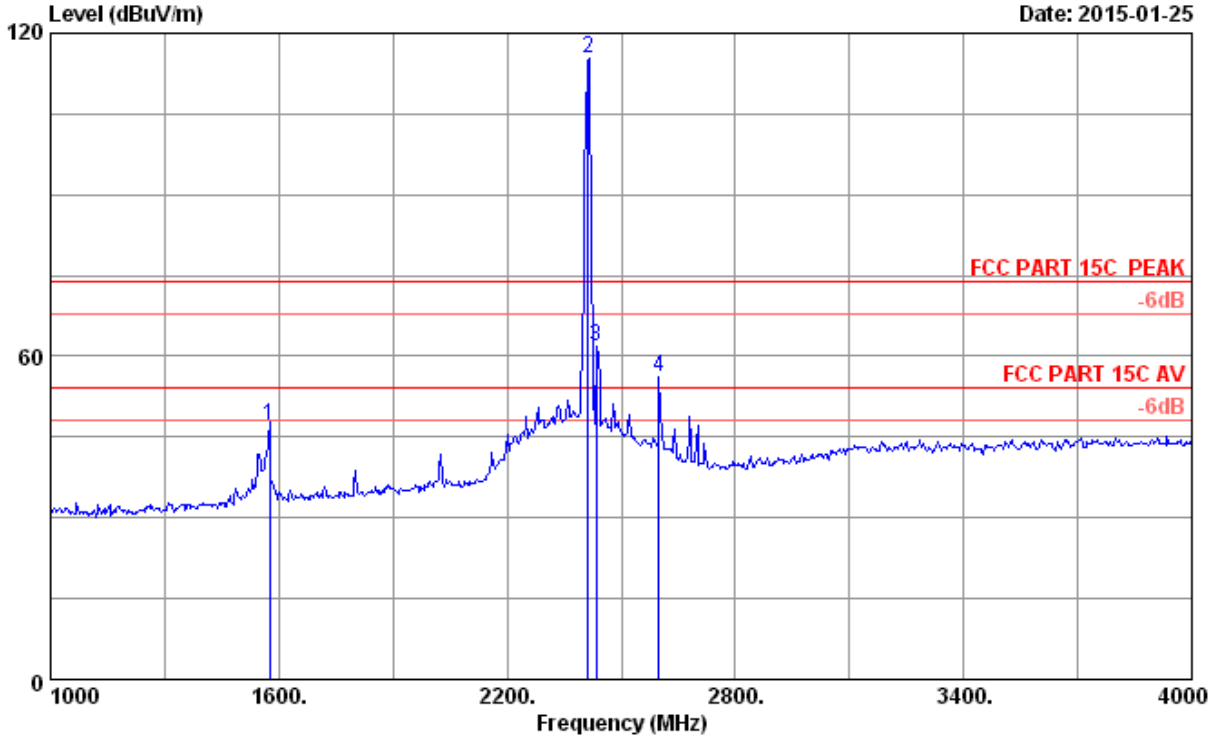

Site no. : 3m Chamber Data no. : 1
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	53.19	47.14	74.00	26.86	Peak
2	2412.000	28.21	5.81	35.70	116.98	115.30	74.00	-41.30	Peak
3	2434.000	28.25	5.85	35.70	63.55	61.95	74.00	12.05	Peak
4	2599.000	28.80	6.09	35.70	56.97	56.16	74.00	17.84	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

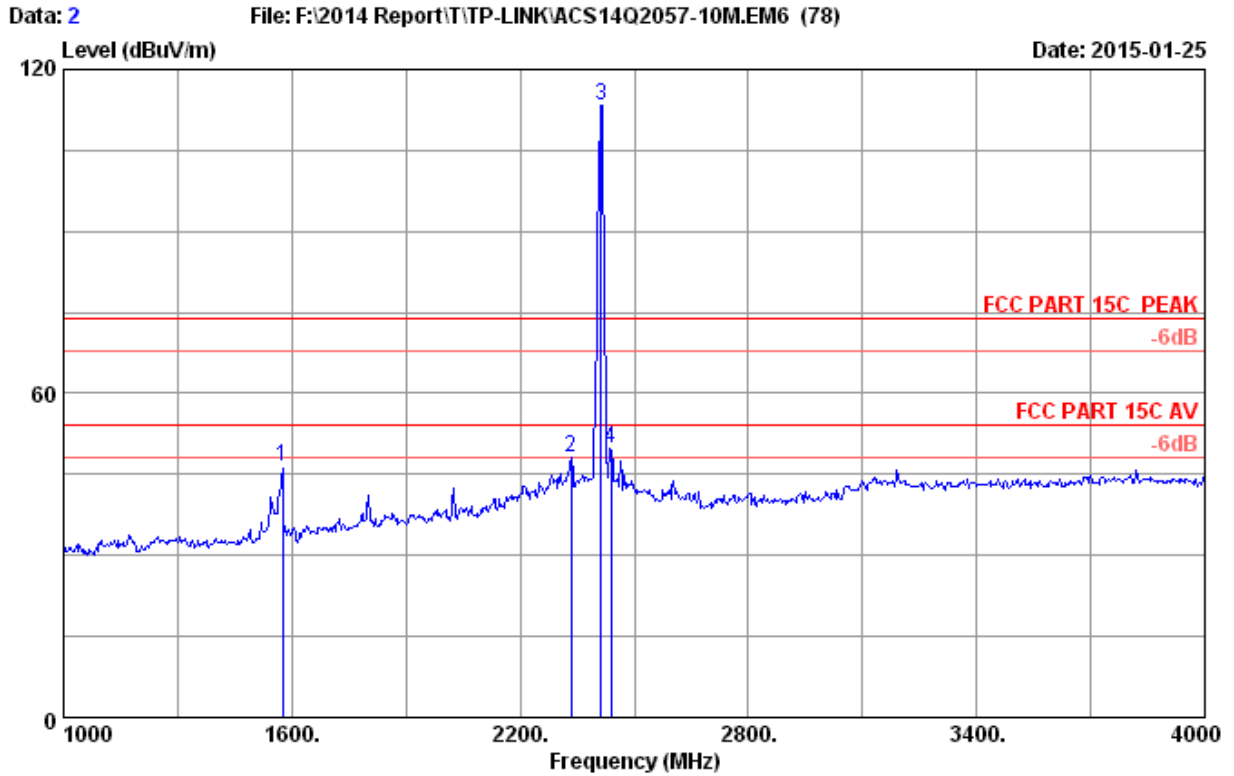


```


Site no.      : 3m Chamber                      Data no.   : 2
Dis. / Ant.  : 3m 2014 3115 (4580)             Ant. pol.  : VERTICAL
Limit        : FCC PART 15C PEAK
Env. / Ins.  : 23*C/54%
Engineer     : Alice_Yang
EUT          : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode    : IEEE802.11b 2412MHz Tx
M/N          : CPE210
    
```

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	52.49	46.44	74.00	27.56	Peak
2	2335.000	28.04	5.70	35.70	50.08	48.12	74.00	25.88	Peak
3	2412.000	28.21	5.81	35.70	115.11	113.43	74.00	-39.43	Peak
4	2440.000	28.27	5.86	35.70	51.35	49.78	74.00	24.22	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

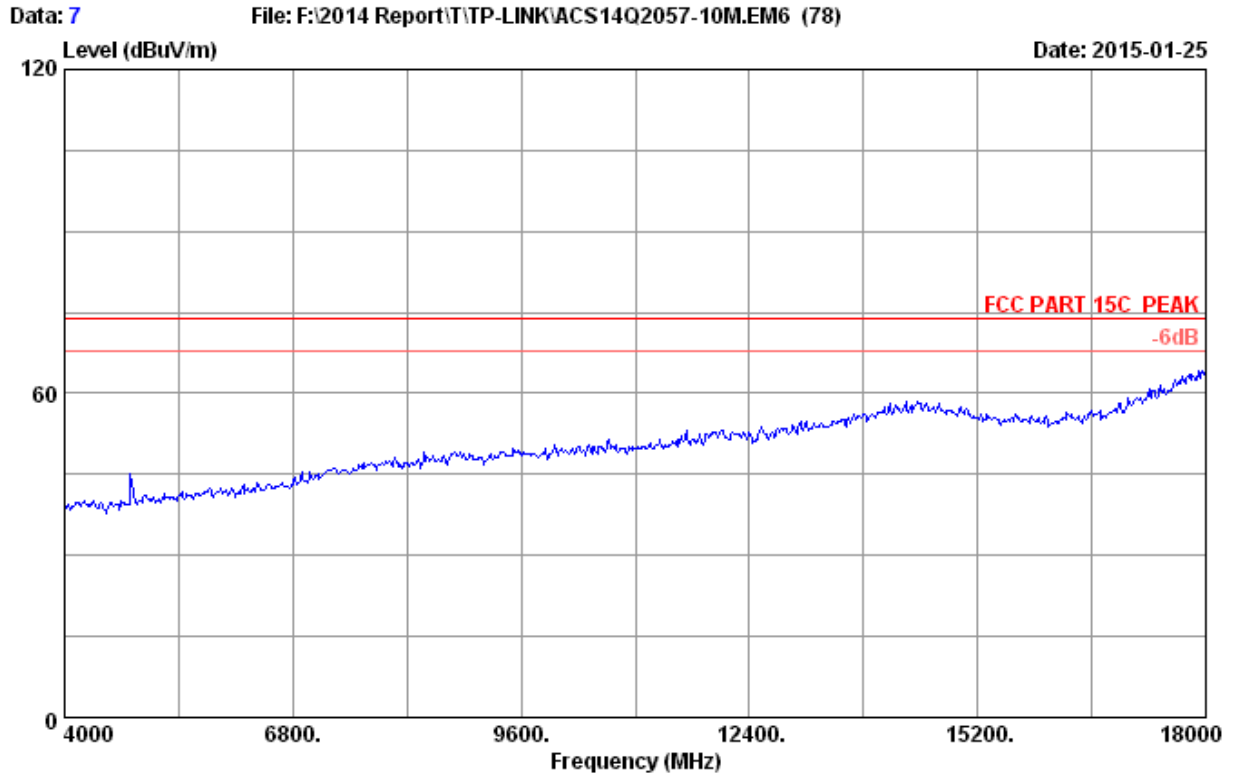


Site no. : 3m Chamber Data no. : 7
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11b 2412MHz Tx
M/N : CPE210

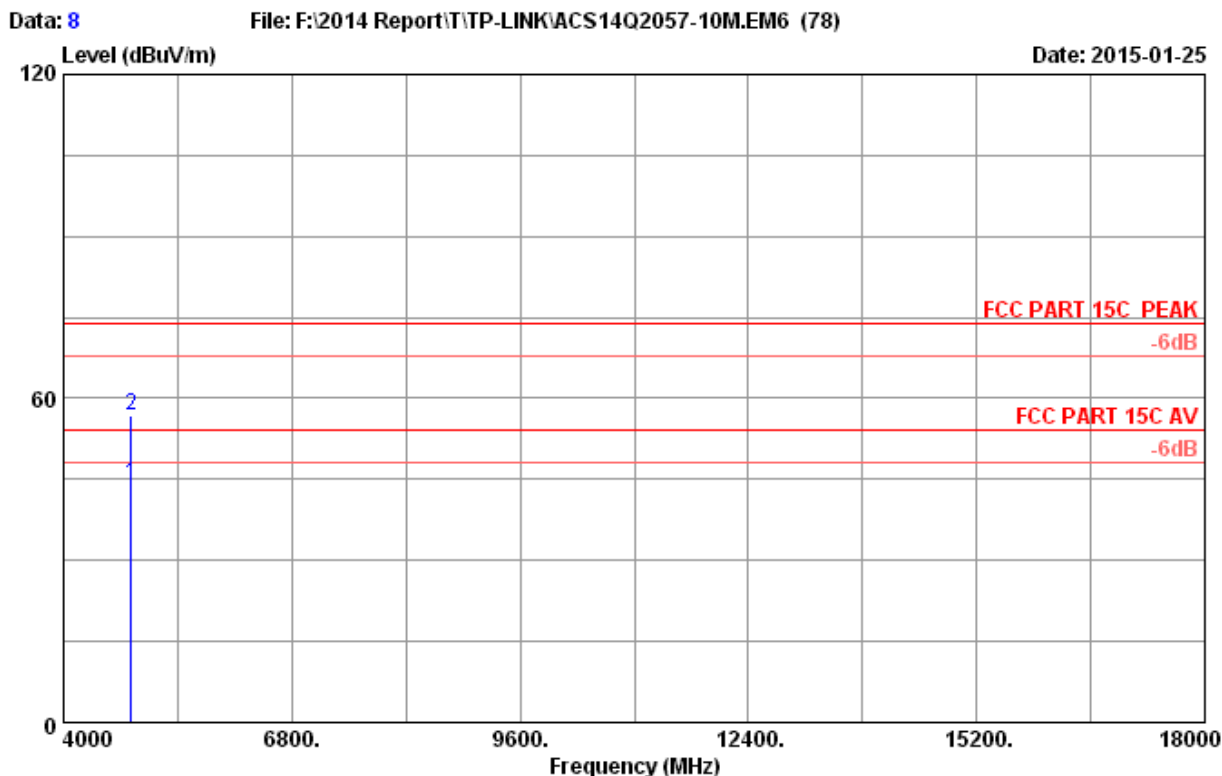


Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	32.88	8.58	35.70	38.22	43.98	54.00	10.02	Average
2	4824.000	32.88	8.58	35.70	51.12	56.88	74.00	17.12	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

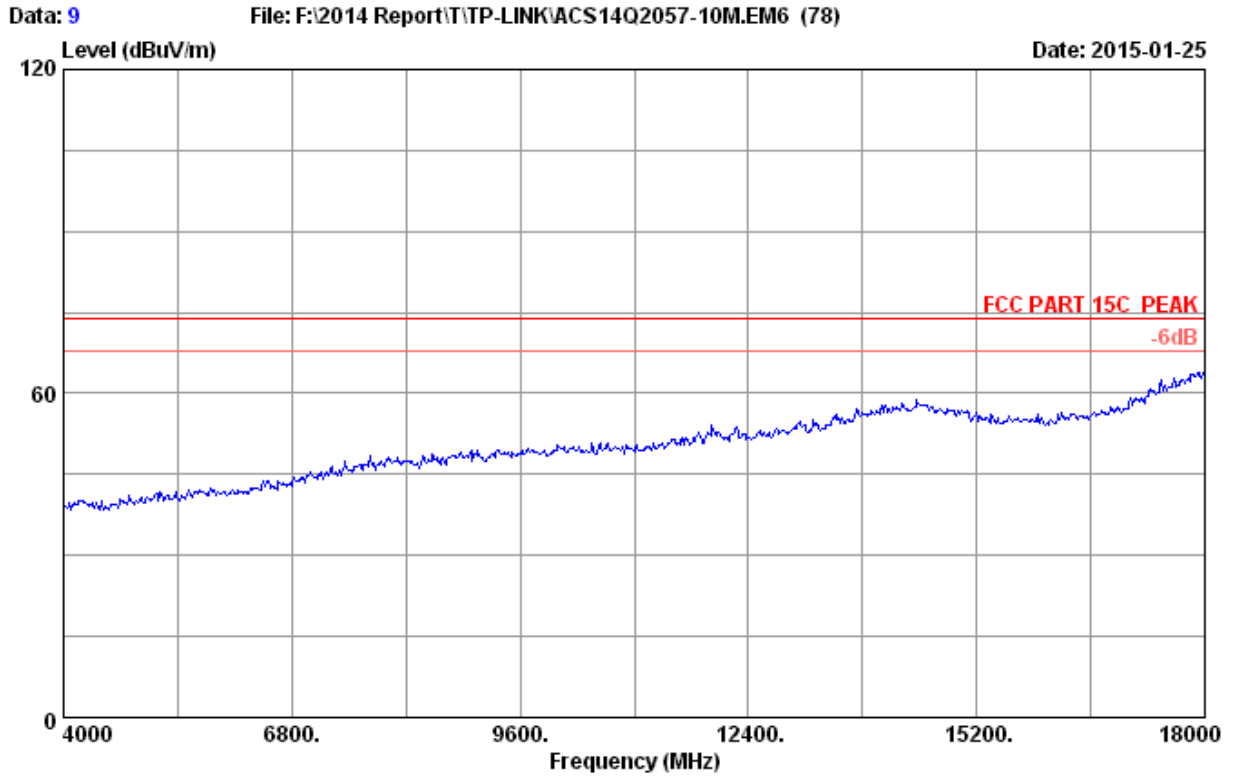


Site no. : 3m Chamber Data no. : 9
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11b 2412MHz Tx
M/N : CPE210

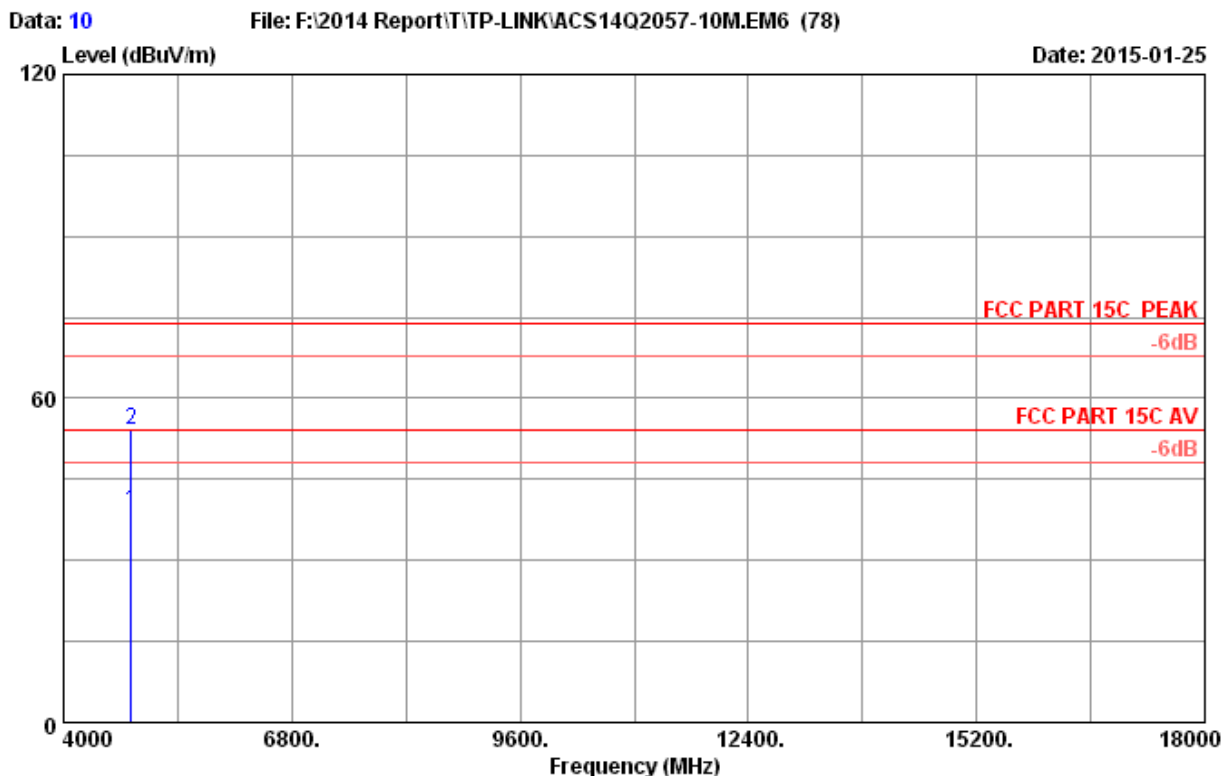

Site no. : 3m Chamber Data no. : 10
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	32.88	8.58	35.70	33.21	38.97	54.00	15.03	Average
2	4824.000	32.88	8.58	35.70	48.55	54.31	74.00	19.69	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

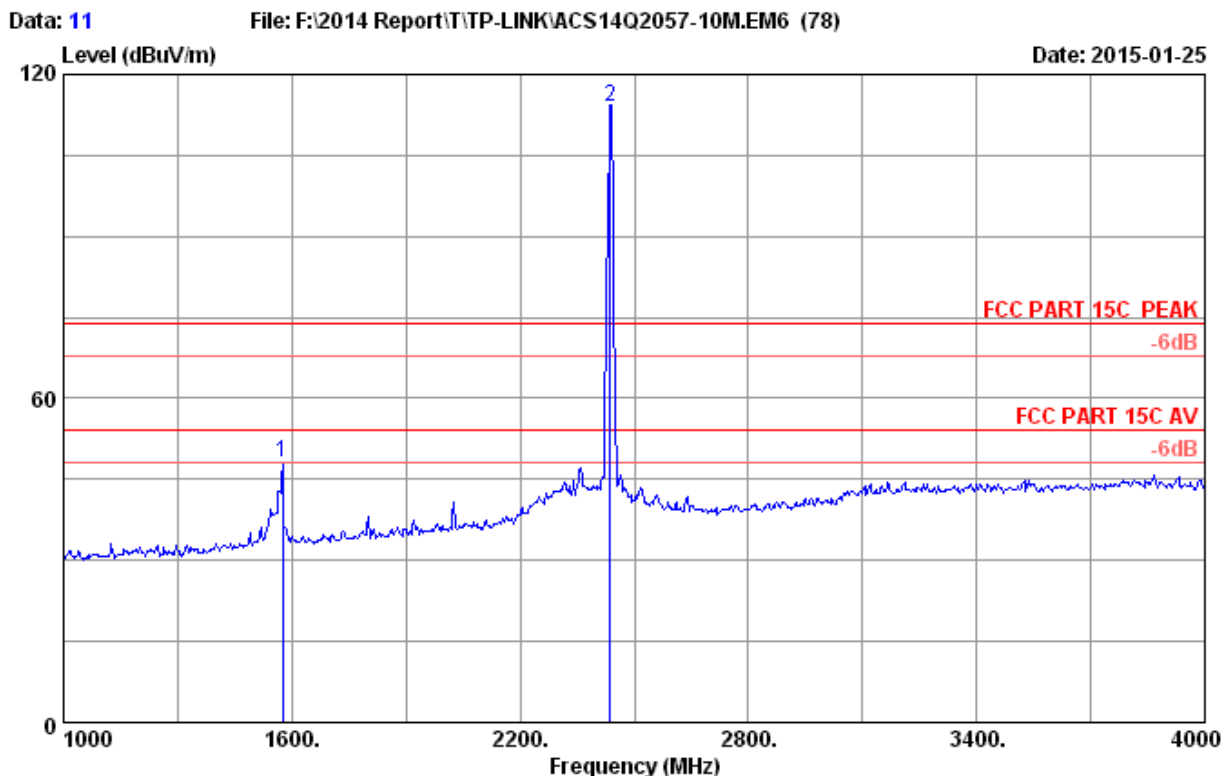

Site no. : 3m Chamber Data no. : 11
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2437MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	54.09	48.04	74.00	25.96	Peak
2	2437.000	28.26	5.85	35.70	115.64	114.05	74.00	-40.05	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

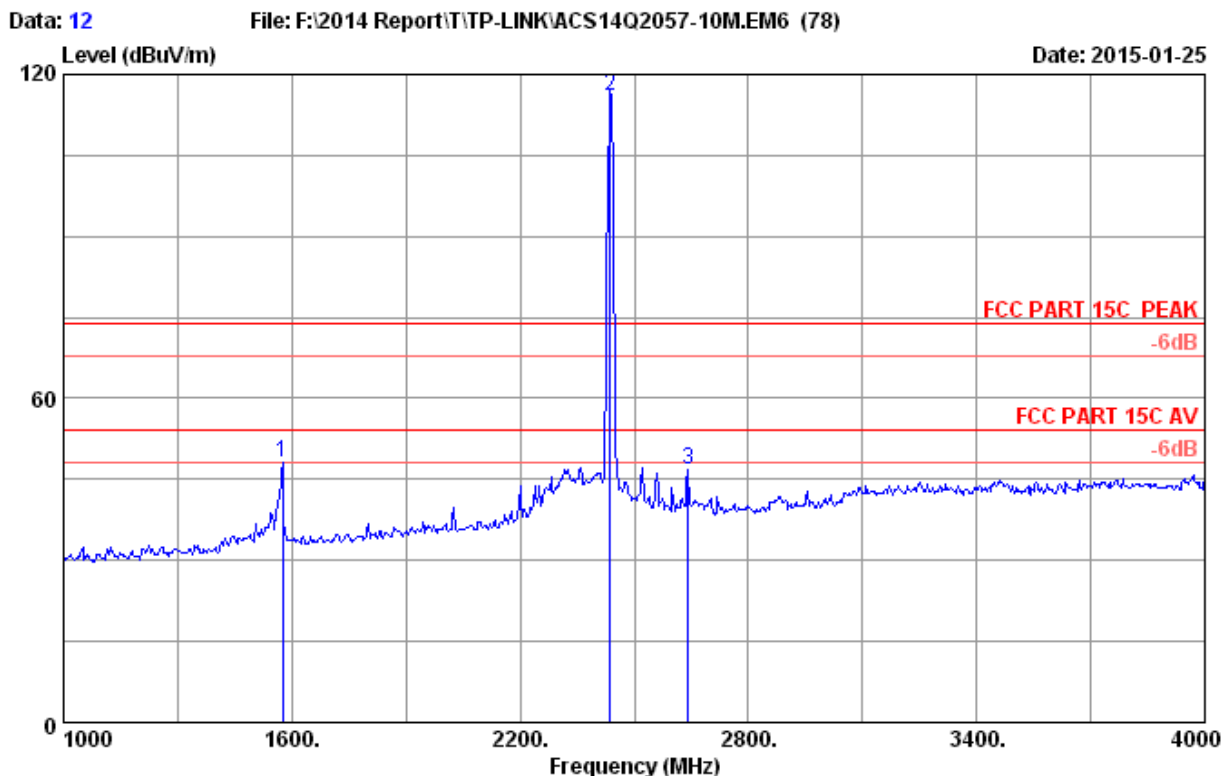


Site no. : 3m Chamber Data no. : 12
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2437MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	54.30	48.25	74.00	25.75	Peak
2	2437.000	28.26	5.85	35.70	117.59	116.00	74.00	-42.00	Peak
3	2641.000	28.96	6.15	35.70	47.36	46.77	74.00	27.23	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

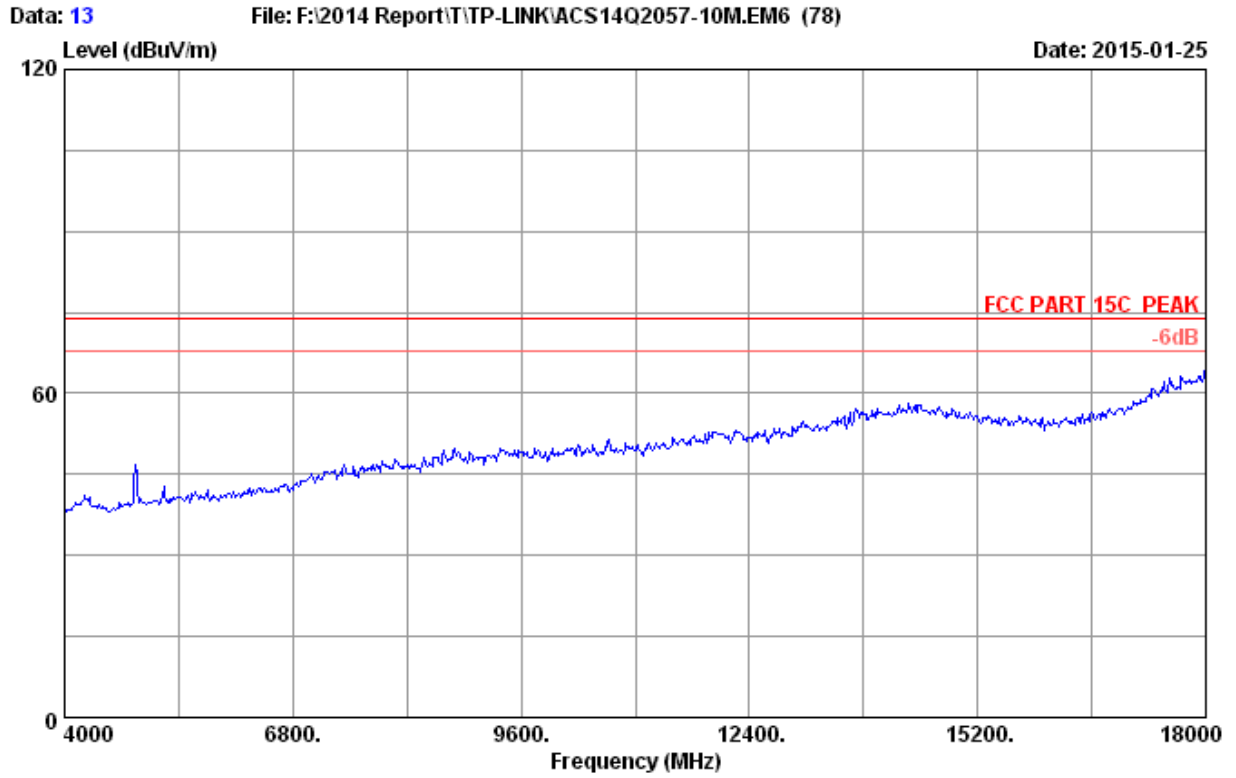


Site no. : 3m Chamber Data no. : 13
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11b 2437MHz Tx
M/N : CPE210

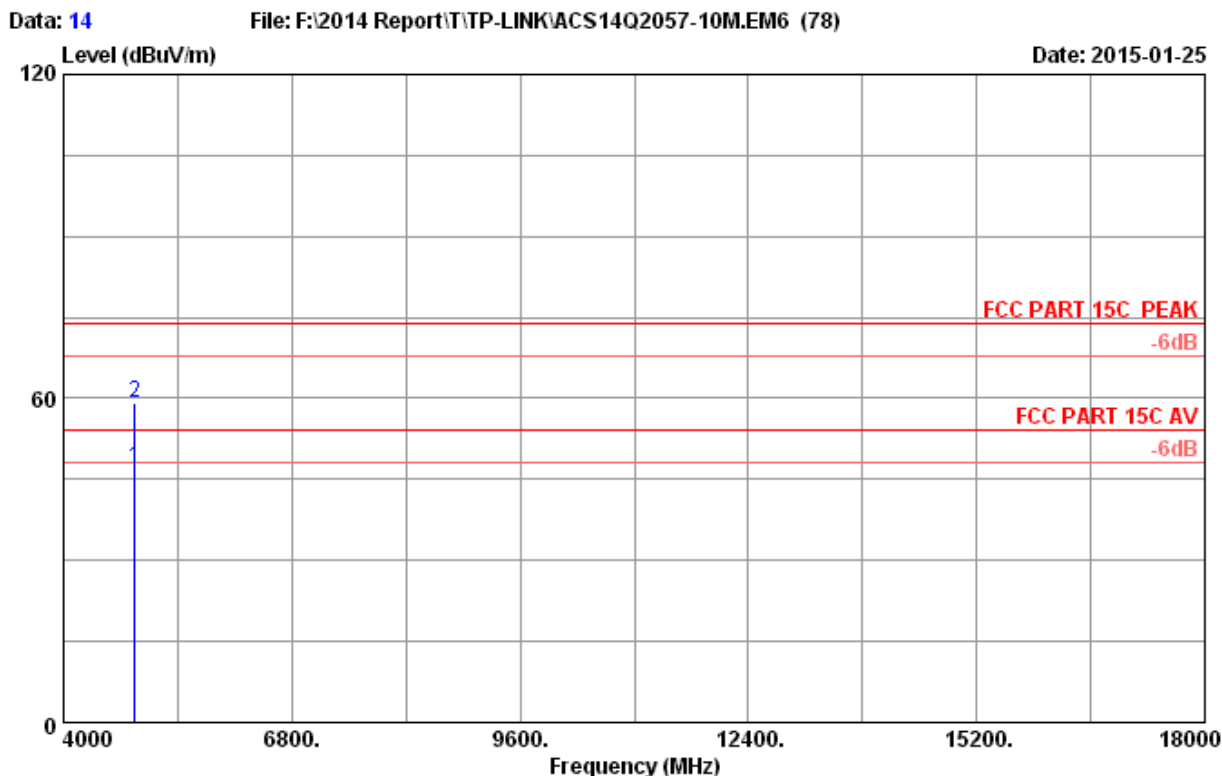

Site no. : 3m Chamber Data no. : 14
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2437MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	32.97	8.63	35.70	41.23	47.13	54.00	6.87	Average
2	4874.000	32.97	8.63	35.70	53.36	59.26	74.00	14.74	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

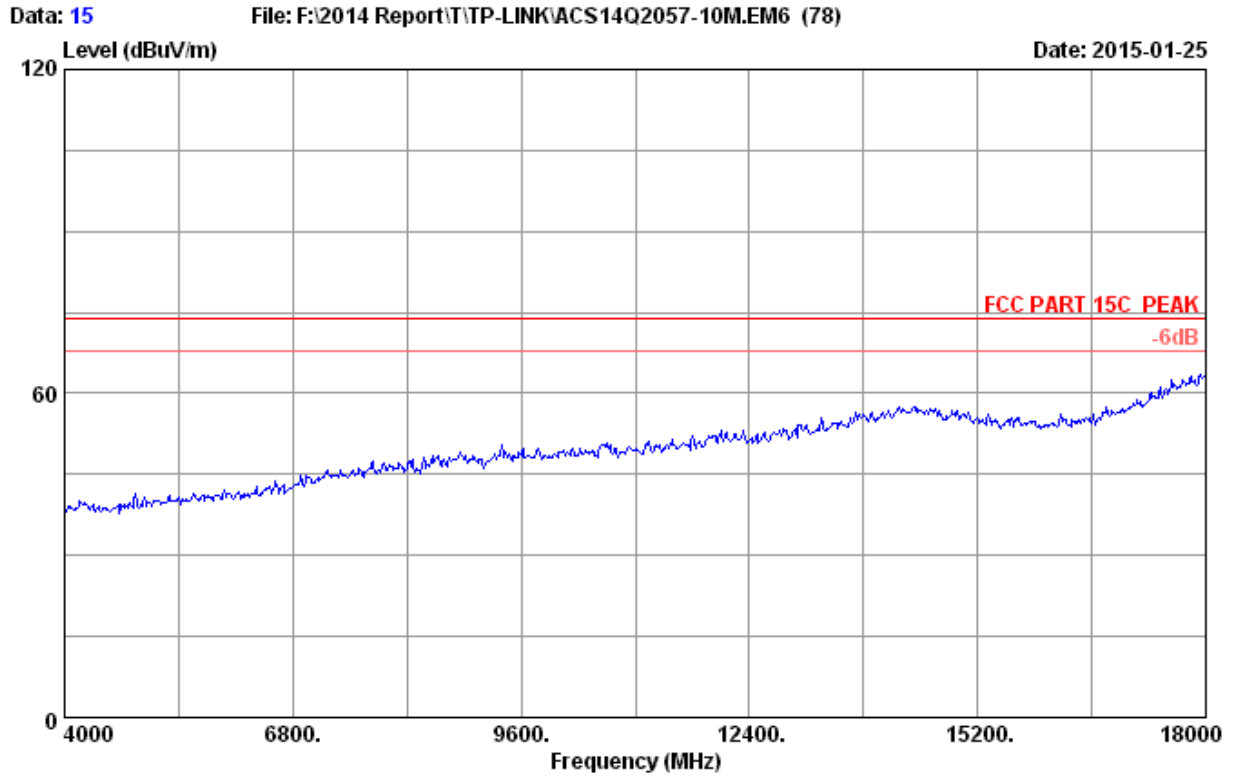


Site no. : 3m Chamber Data no. : 15
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11b 2437MHz Tx
M/N : CPE210

Data: 16

File: F:\2014 Report\T\TP-LINK\ACS14Q2057-10MEM6 (78)


Date: 2015-01-25

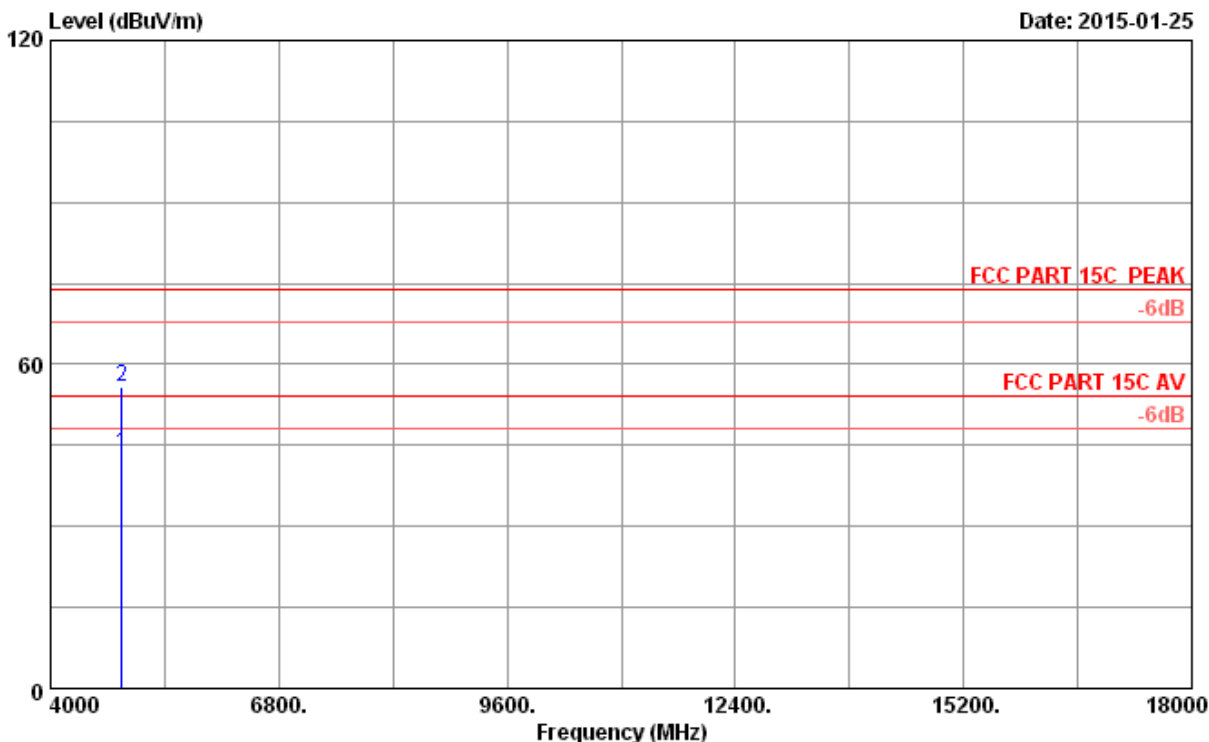

Site no. : 3m Chamber Data no. : 16
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	32.97	8.63	35.70	37.46	43.36	54.00	10.64	Average
2	4874.000	32.97	8.63	35.70	49.94	55.84	74.00	18.16	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

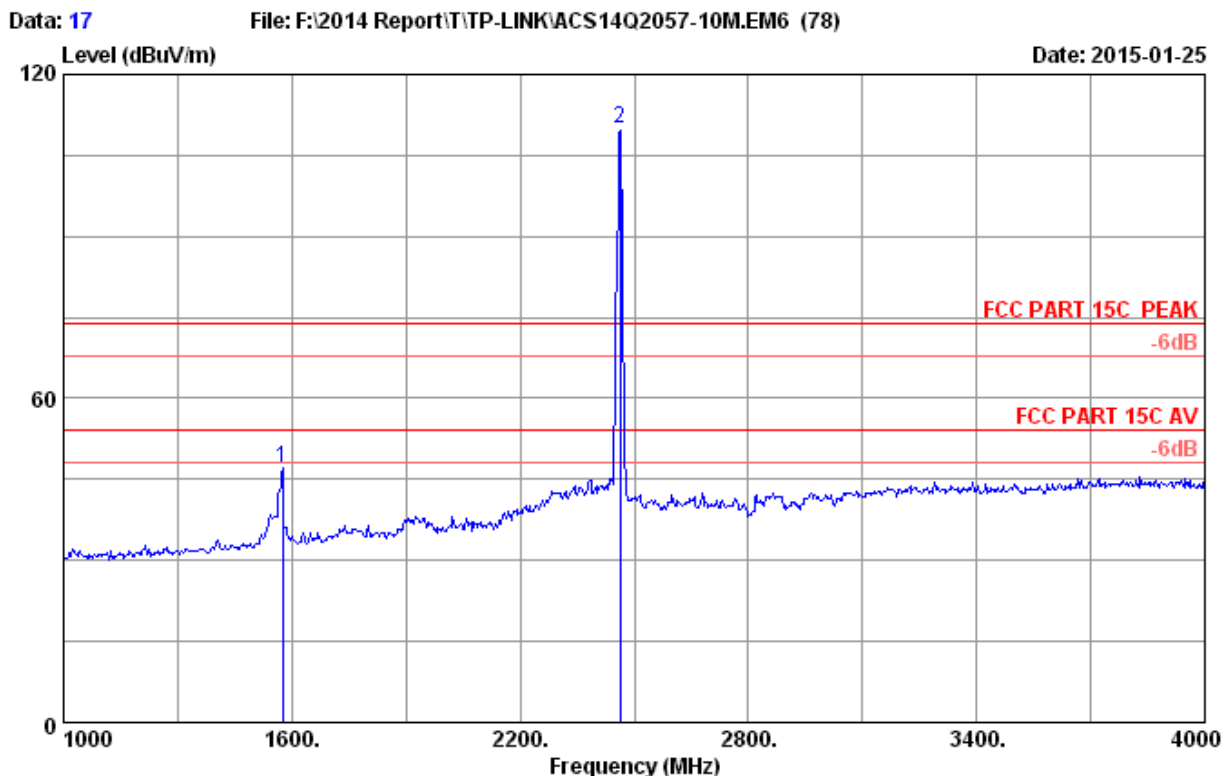


```

Site no.      : 3m Chamber                      Data no.   : 17
Dis. / Ant.  : 3m 2014 3115 (4580)             Ant. pol.  : VERTICAL
Limit        : FCC PART 15C PEAK
Env. / Ins.  : 23*C/54%
Engineer     : Alice_Yang
EUT          : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode    : IEEE802.11b 2462MHz Tx
M/N          : CPE210
    
```

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	53.26	47.21	74.00	26.79	Peak
2	2462.000	28.32	5.89	35.70	111.47	109.98	74.00	-35.98	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

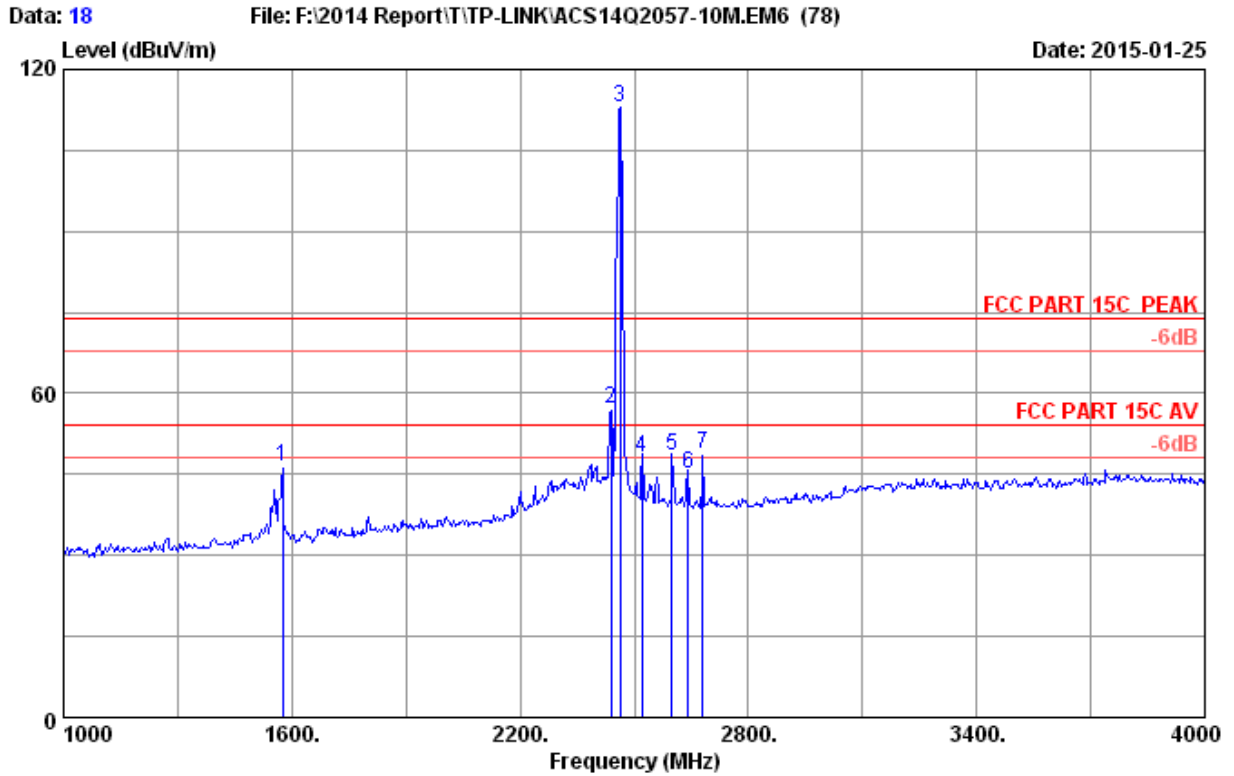


Site no. : 3m Chamber Data no. : 18
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	52.48	46.43	74.00	27.57	Peak
2	2440.000	28.27	5.86	35.70	58.73	57.16	74.00	16.84	Peak
3	2462.000	28.32	5.89	35.70	114.57	113.08	74.00	-39.08	Peak
4	2521.000	28.48	5.97	35.70	49.52	48.27	74.00	25.73	Peak
5	2599.000	28.80	6.09	35.70	49.24	48.43	74.00	25.57	Peak
6	2641.000	28.96	6.15	35.70	45.85	45.26	74.00	28.74	Peak
7	2680.000	29.12	6.20	35.70	49.16	48.78	74.00	25.22	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

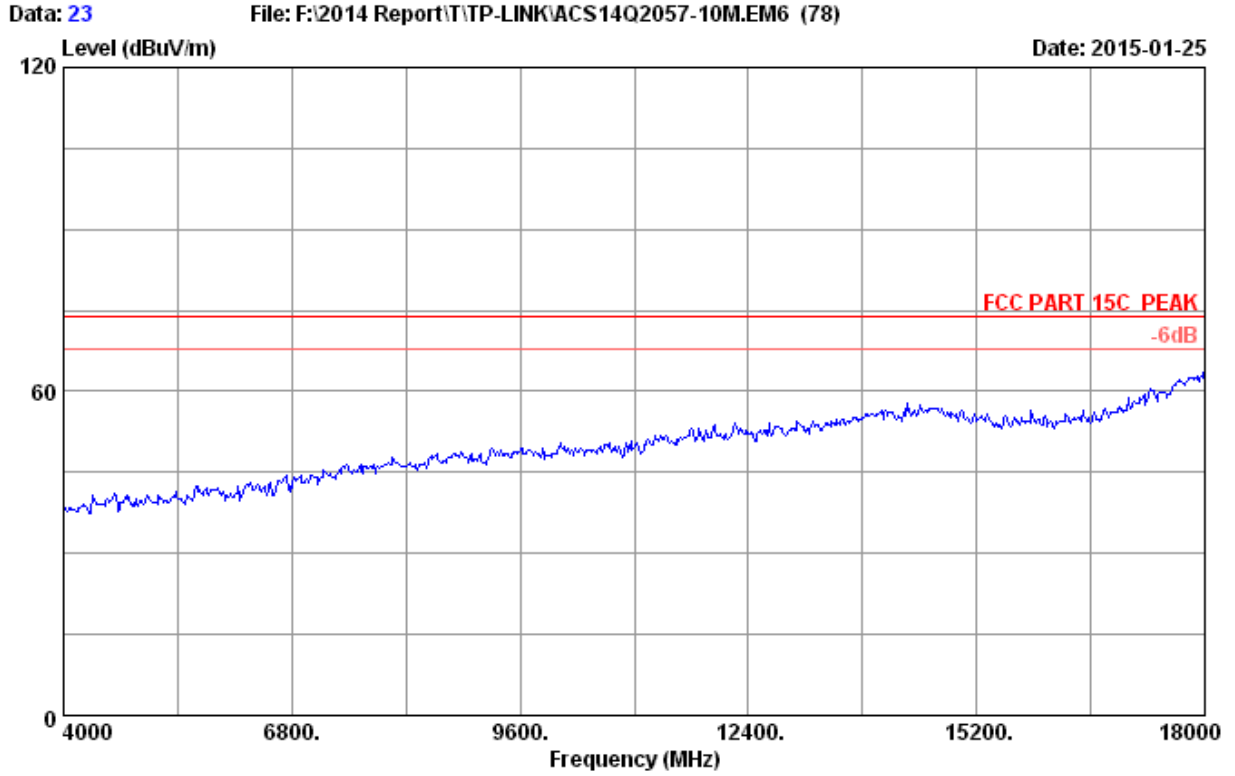


Site no. : 3m Chamber Data no. : 23
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11b 2462MHz Tx
M/N : CPE210

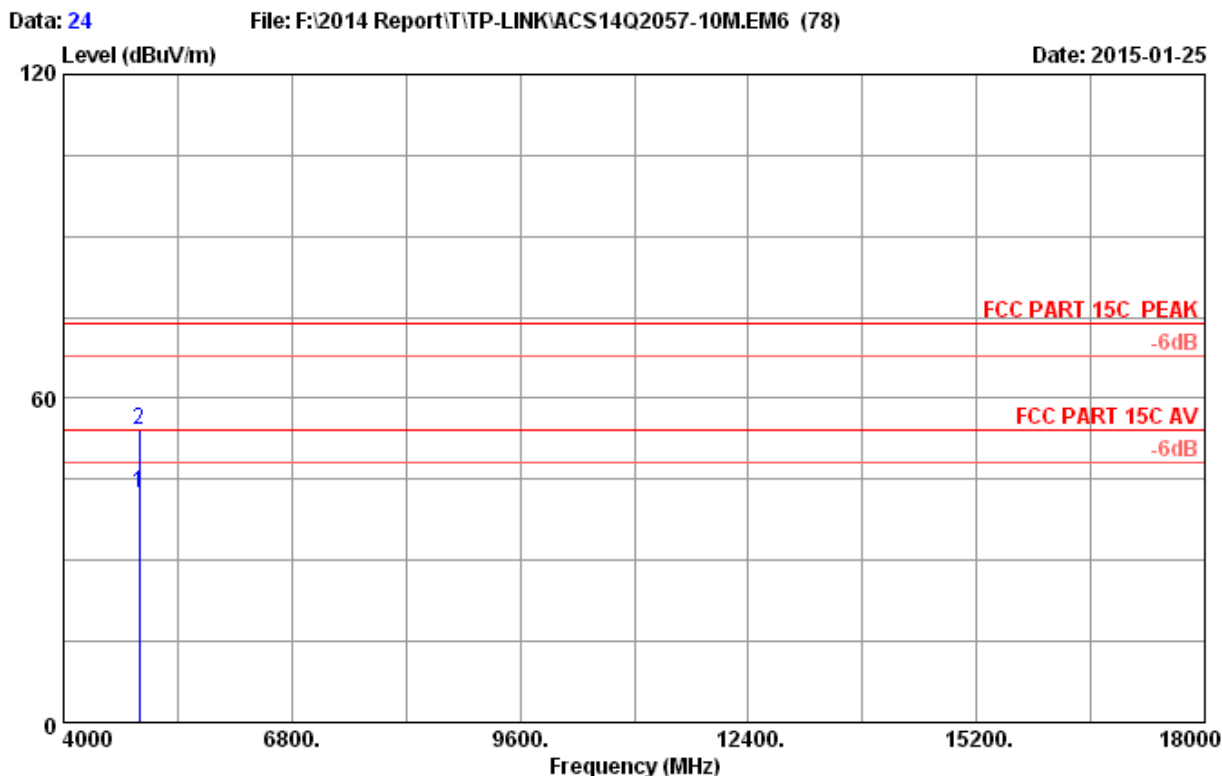


Site no. : 3m Chamber Data no. : 24
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.000	33.06	8.69	35.70	36.32	42.37	54.00	11.63	Average
2	4924.000	33.06	8.69	35.70	48.26	54.31	74.00	19.69	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

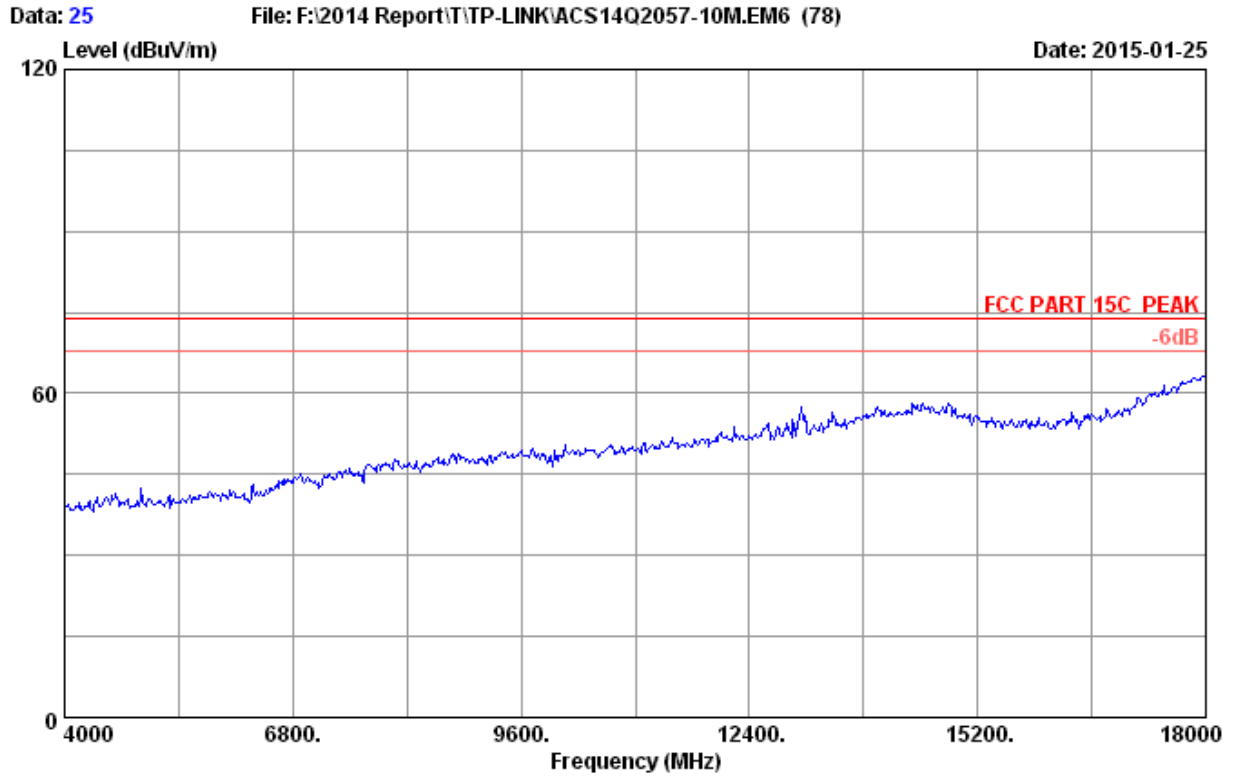

Site no. : 3m Chamber Data no. : 25
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11b 2462MHz Tx
M/N : CPE210

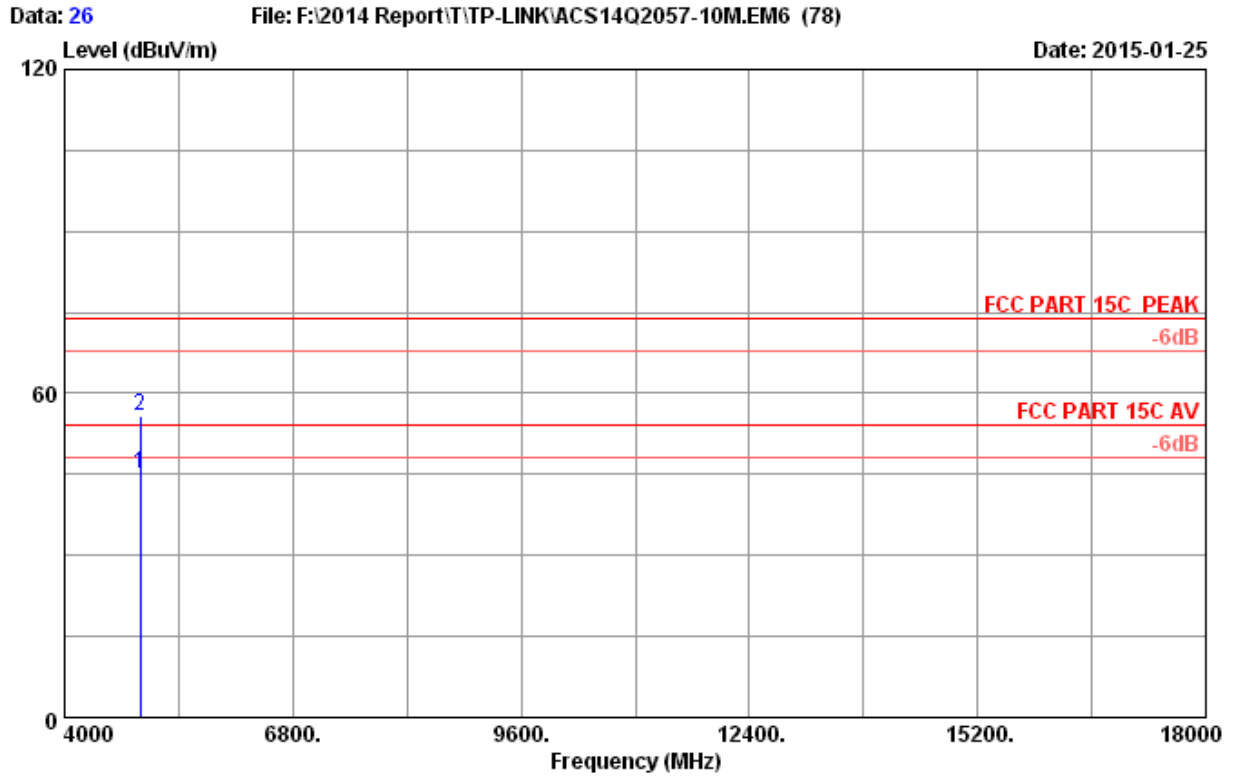

Site no. : 3m Chamber Data no. : 26
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2462MHz Tx
 M/N : CPE210


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.000	33.06	8.69	35.70	39.15	45.20	54.00	8.80	Average
2	4924.000	33.06	8.69	35.70	49.76	55.81	74.00	18.19	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

Data: 27

File: F:\2014 Report\TTP-LINK\ACS14Q2057-10MEM6 (78)


Date: 2015-01-25

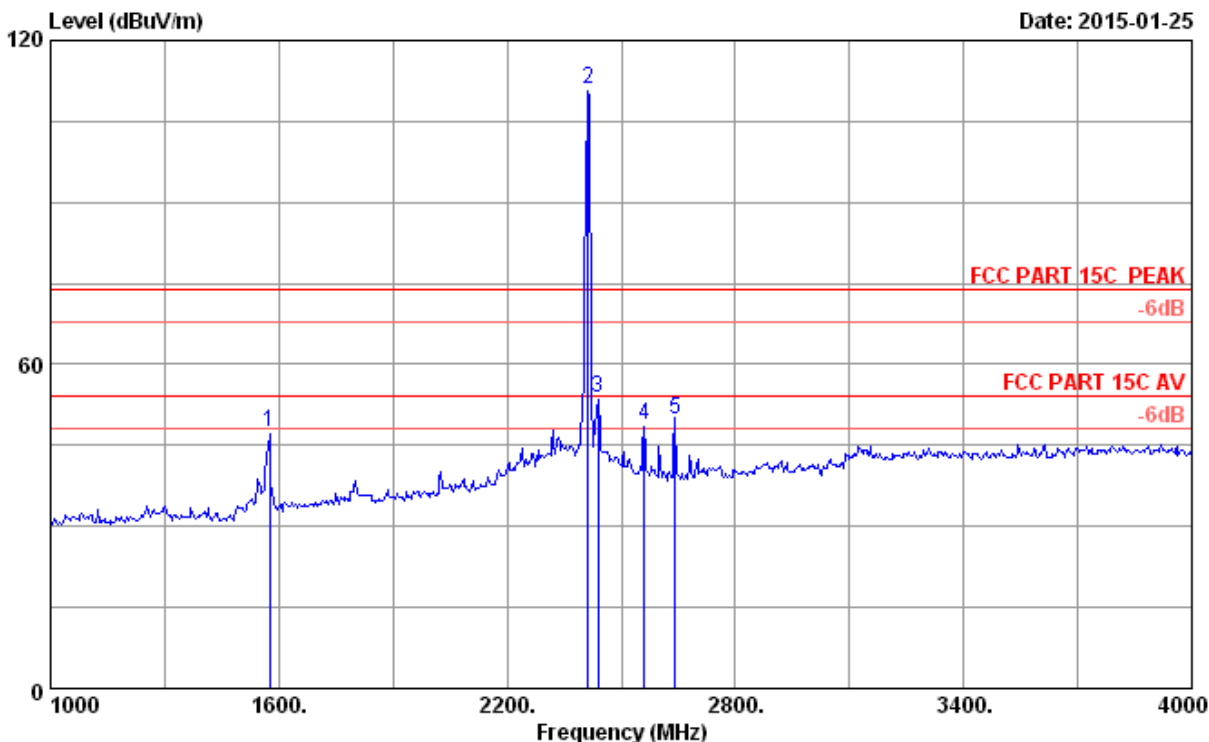

Site no. : 3m Chamber Data no. : 27
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	53.41	47.36	74.00	26.64	Peak
2	2412.000	28.21	5.81	35.70	112.57	110.89	74.00	-36.89	Peak
3	2440.000	28.27	5.86	35.70	55.30	53.73	74.00	20.27	Peak
4	2560.000	28.64	6.03	35.70	49.72	48.69	74.00	25.31	Peak
5	2641.000	28.96	6.15	35.70	50.33	49.74	74.00	24.26	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

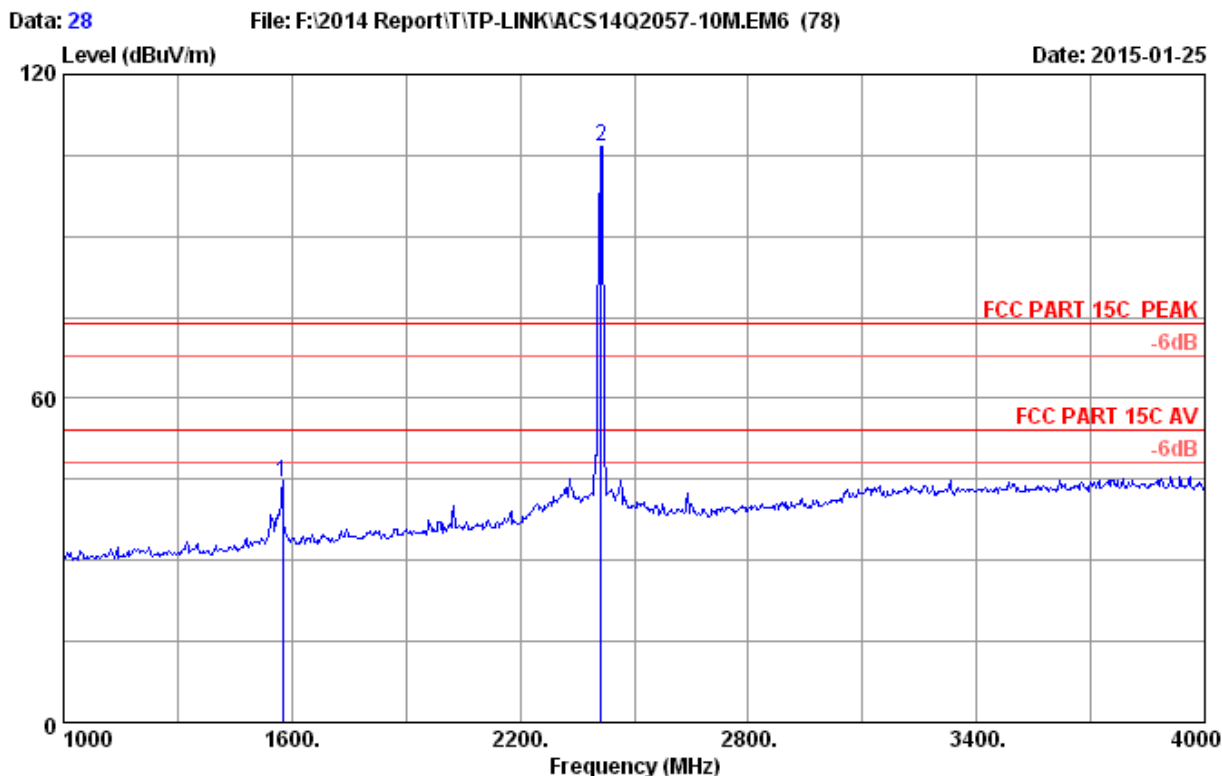


Site no. : 3m Chamber Data no. : 28
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	50.45	44.40	74.00	29.60	Peak
2	2412.000	28.21	5.81	35.70	108.21	106.53	74.00	-32.53	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

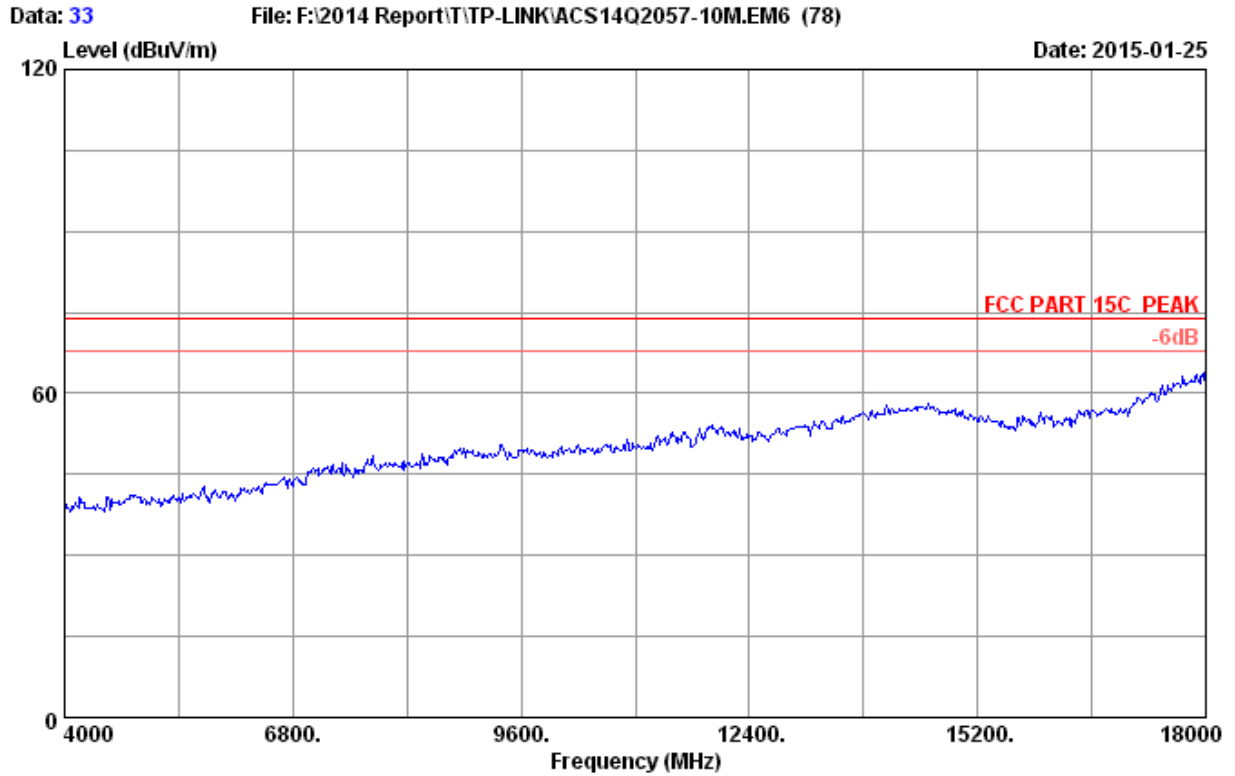


Site no. : 3m Chamber Data no. : 33
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11g 2412MHz Tx
M/N : CPE210

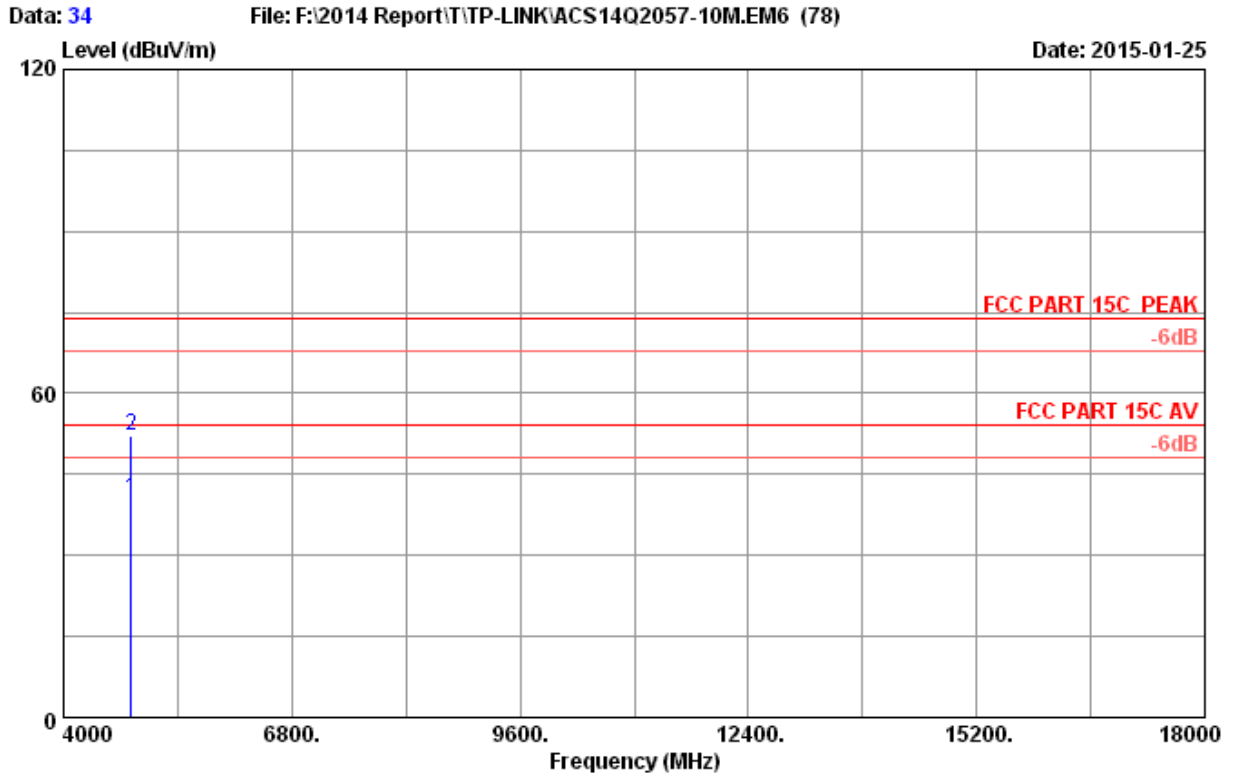


Site no. : 3m Chamber Data no. : 34
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	32.88	8.58	35.70	34.72	40.48	54.00	13.52	Average
2	4824.000	32.88	8.58	35.70	46.45	52.21	74.00	21.79	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

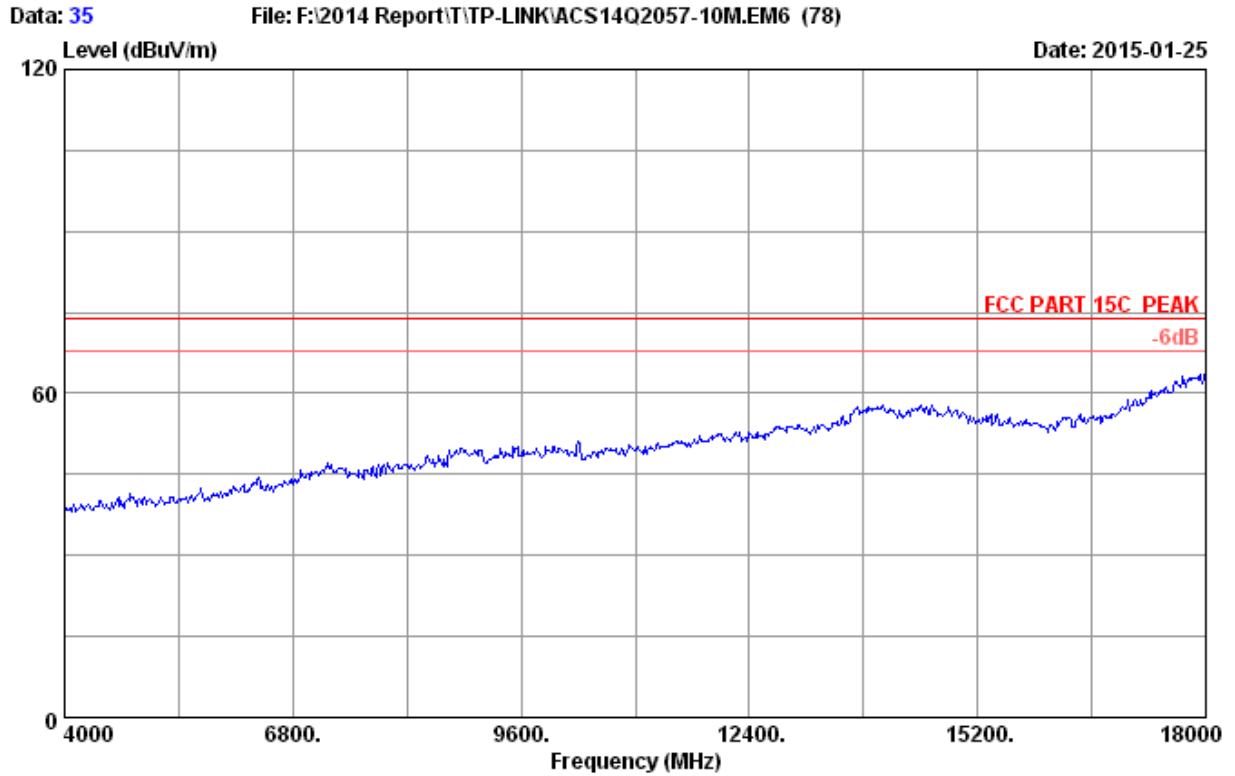


Site no. : 3m Chamber Data no. : 35
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11g 2412MHz Tx
M/N : CPE210

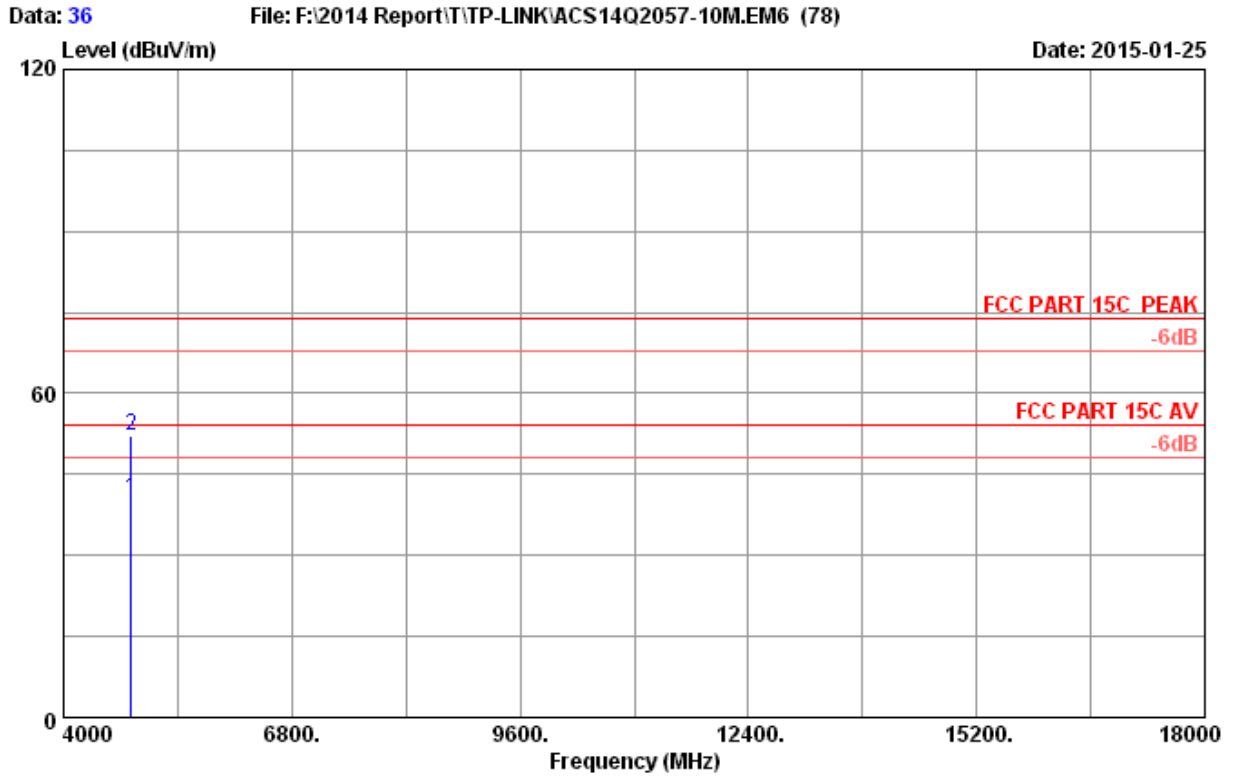

Site no. : 3m Chamber Data no. : 36
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	32.88	8.58	35.70	34.57	40.33	54.00	13.67	Average
2	4824.000	32.88	8.58	35.70	46.51	52.27	74.00	21.73	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

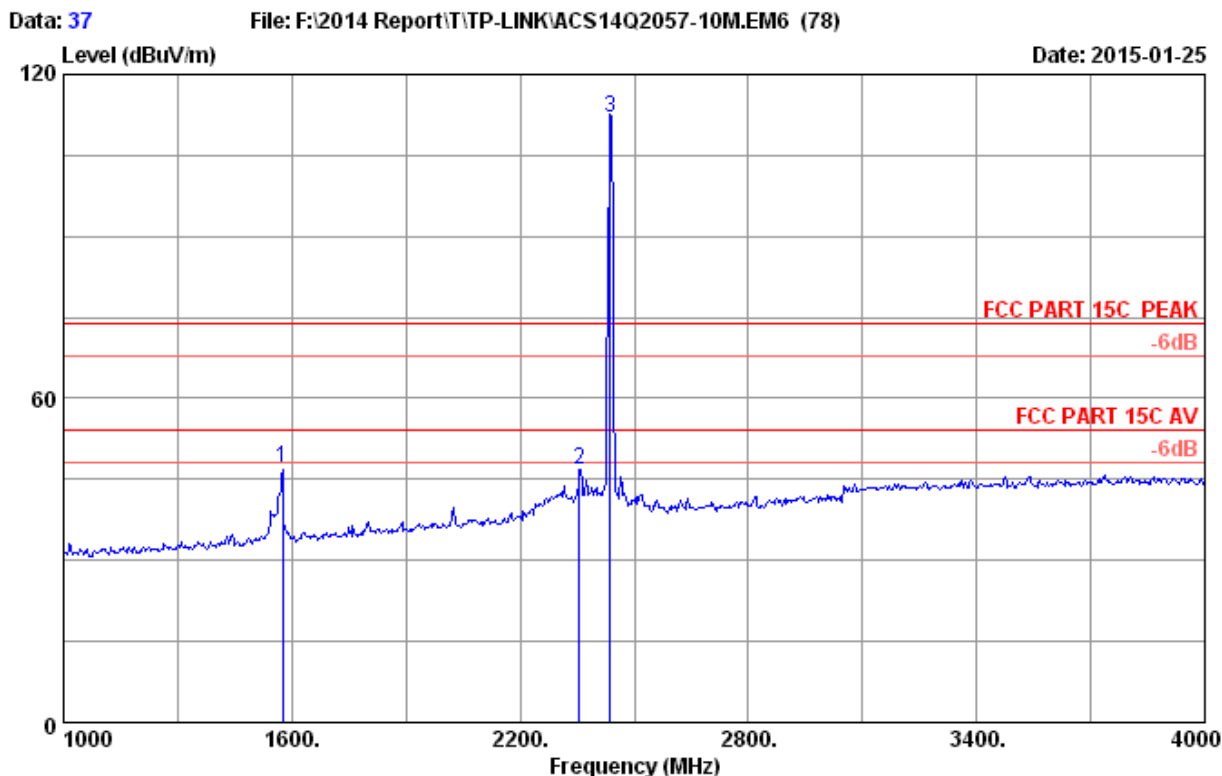

Site no. : 3m Chamber Data no. : 37
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2437MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	53.15	47.10	74.00	26.90	Peak
2	2356.000	28.08	5.73	35.70	48.78	46.89	74.00	27.11	Peak
3	2437.000	28.26	5.85	35.70	113.64	112.05	74.00	-38.05	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

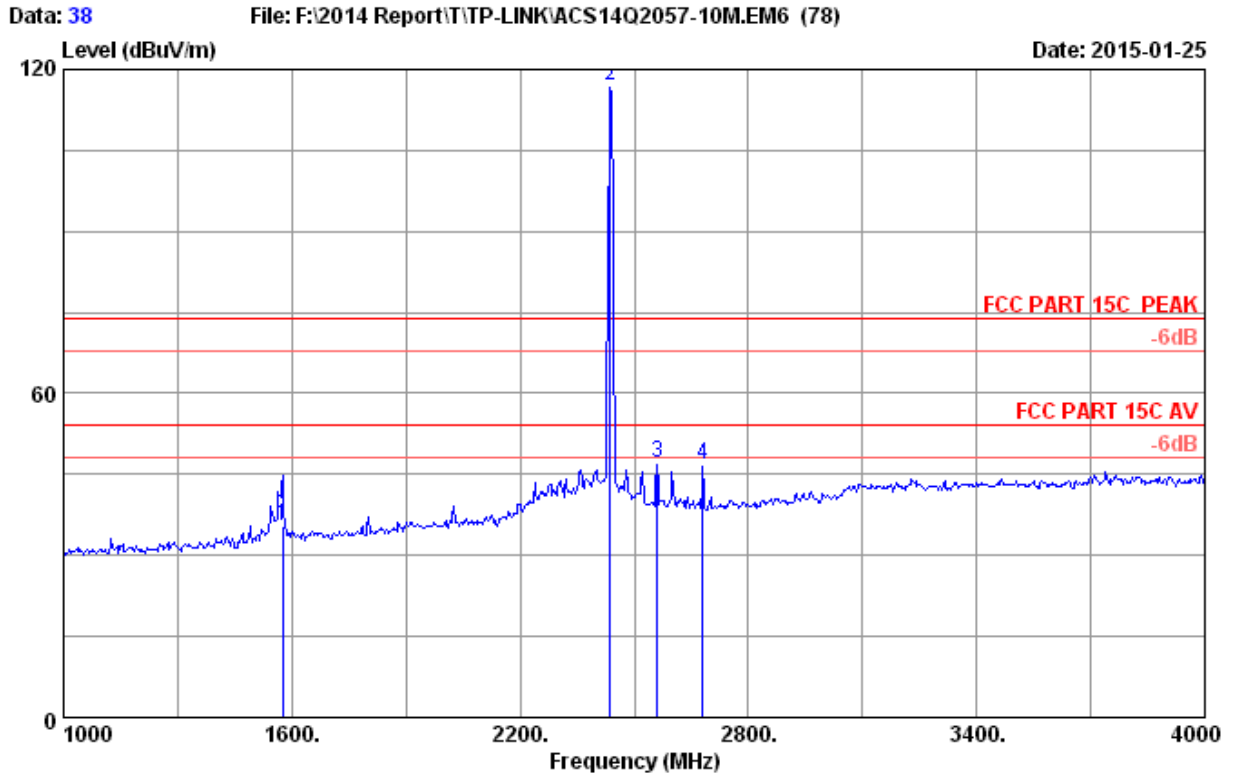


Site no. : 3m Chamber Data no. : 38
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2437MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	41.55	35.50	74.00	38.50	Peak
2	2437.000	28.26	5.85	35.70	118.72	117.13	74.00	-43.13	Peak
3	2560.000	28.64	6.03	35.70	48.15	47.12	74.00	26.88	Peak
4	2680.000	29.12	6.20	35.70	47.26	46.88	74.00	27.12	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

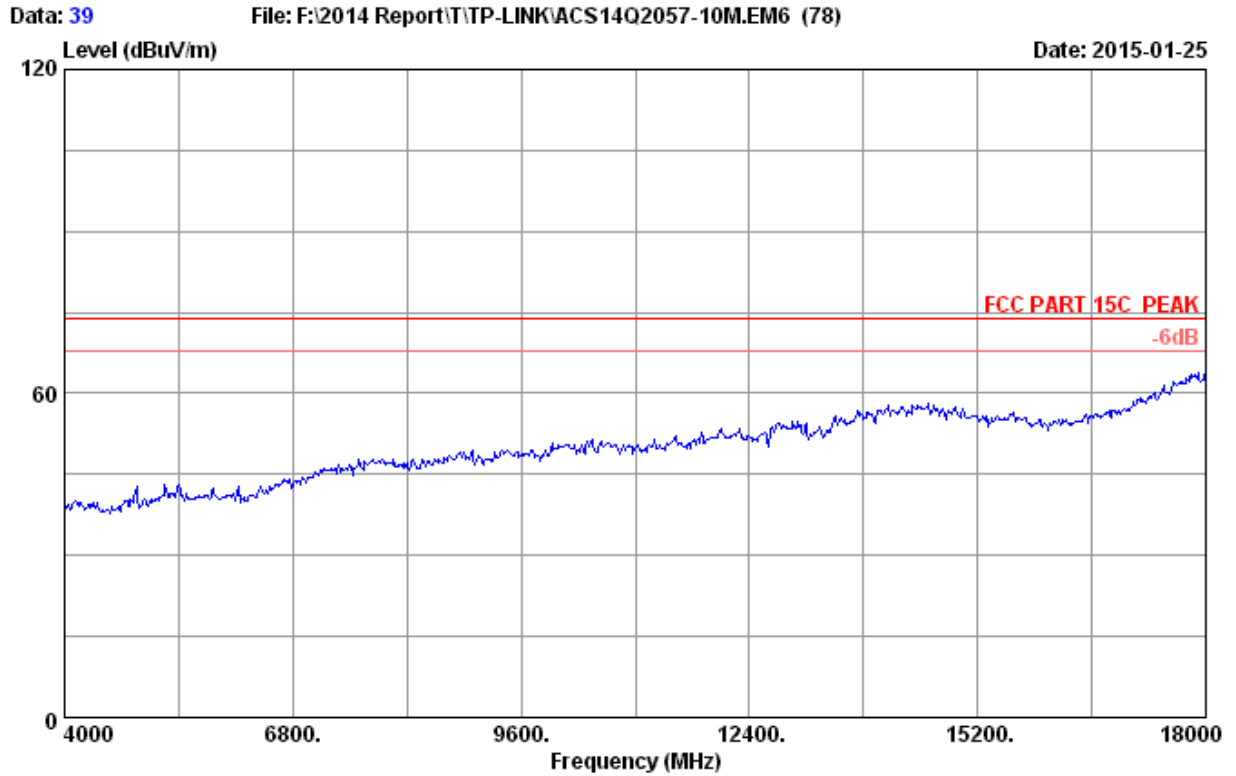


Site no. : 3m Chamber Data no. : 39
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11g 2437MHz Tx
M/N : CPE210

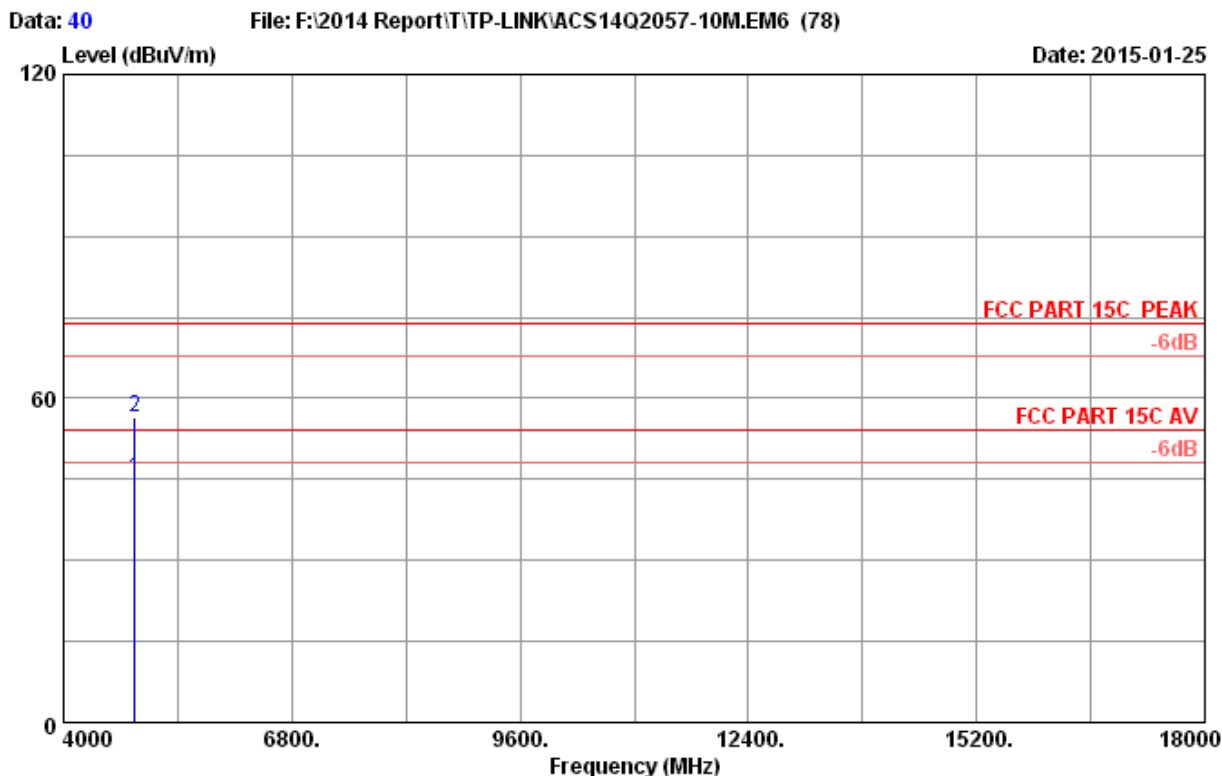


Site no. : 3m Chamber Data no. : 40
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2437MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	32.97	8.63	35.70	39.13	45.03	54.00	8.97	Average
2	4874.000	32.97	8.63	35.70	50.46	56.36	74.00	17.64	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

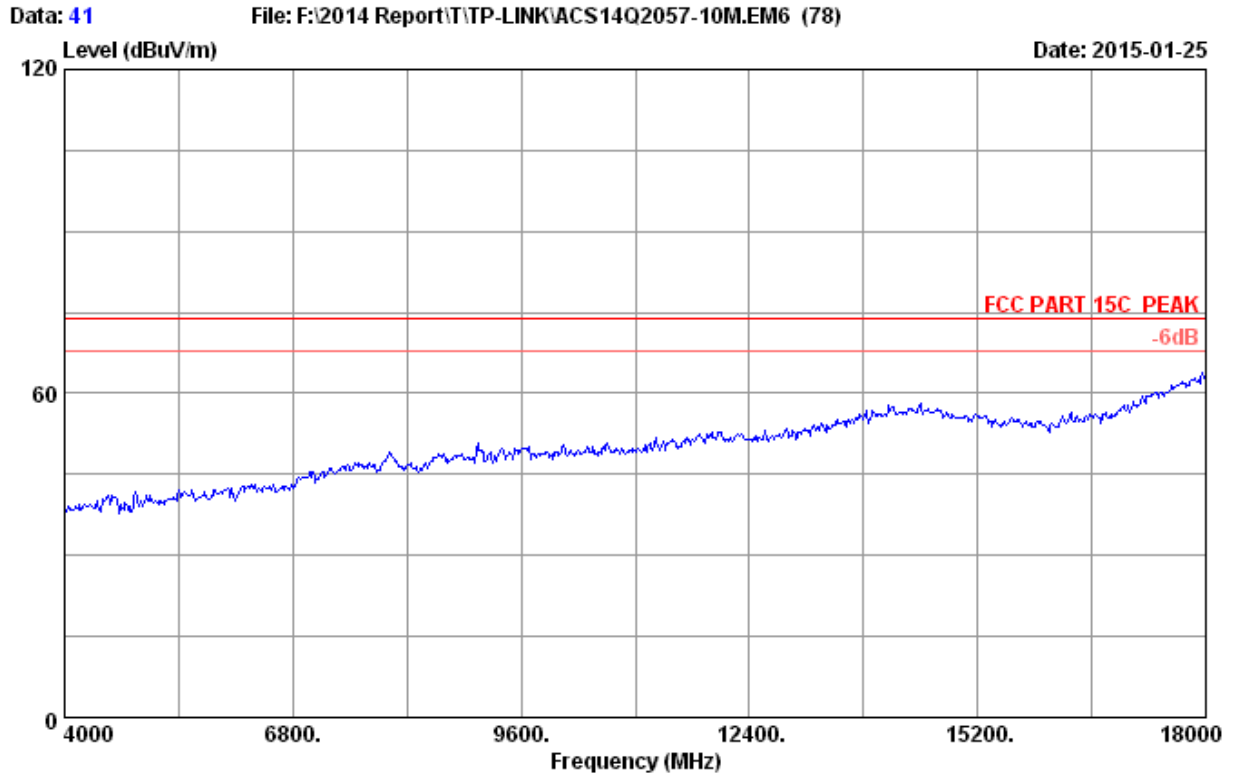


Site no. : 3m Chamber Data no. : 41
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11g 2437MHz Tx
M/N : CPE210

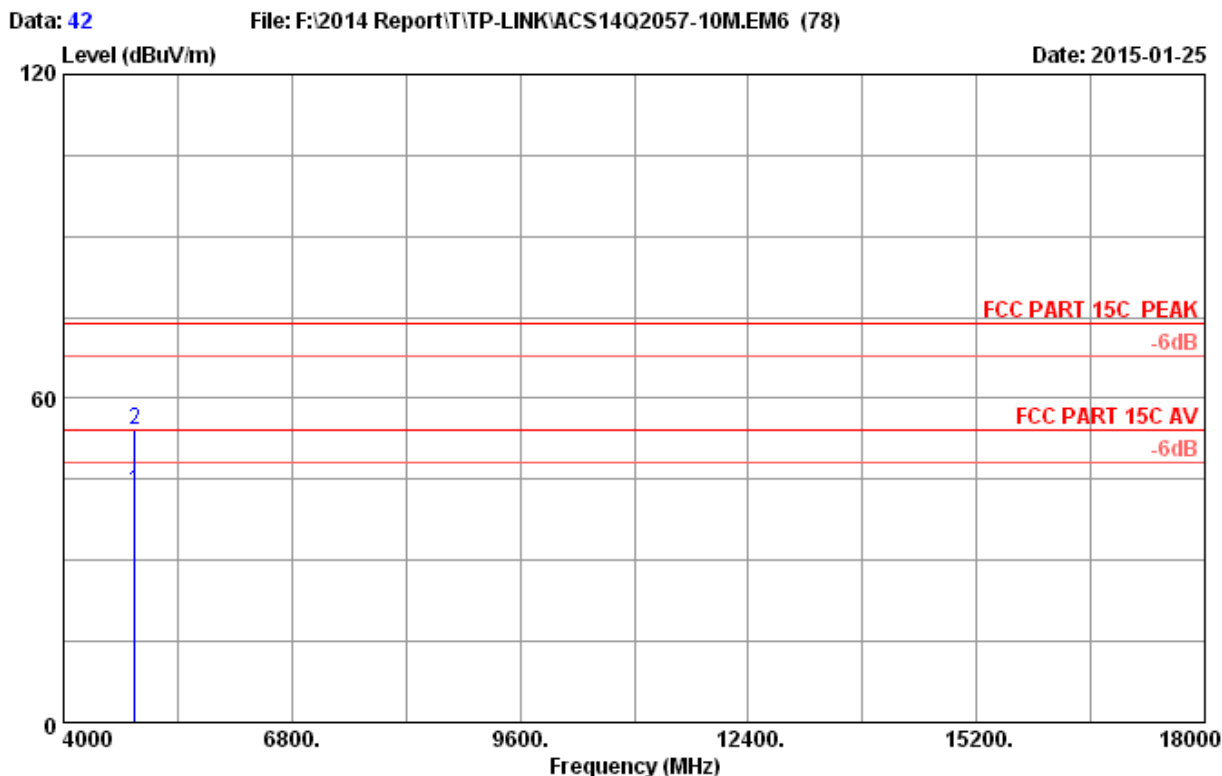

Site no. : 3m Chamber Data no. : 42
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2437MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	32.97	8.63	35.70	36.82	42.72	54.00	11.28	Average
2	4874.000	32.97	8.63	35.70	48.24	54.14	74.00	19.86	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

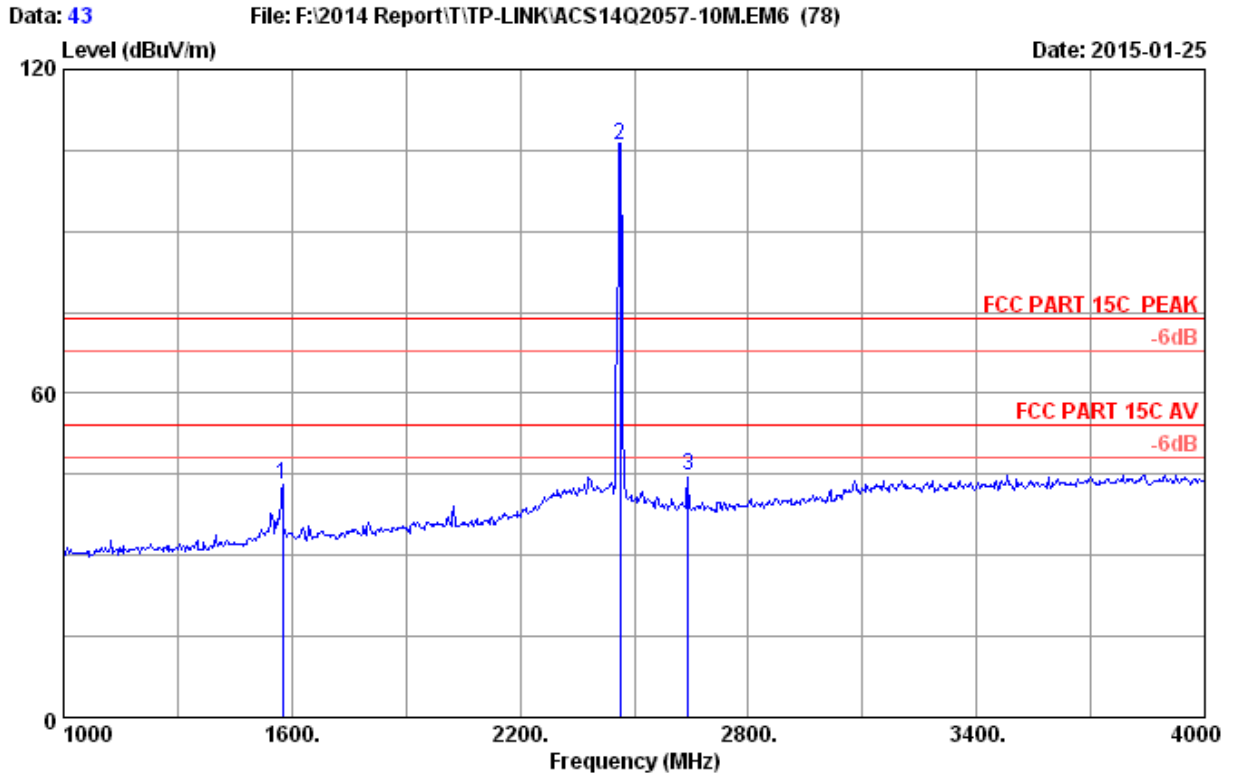


```

Site no.      : 3m Chamber                      Data no.   : 43
Dis. / Ant.  : 3m 2014 3115 (4580)             Ant. pol.  : VERTICAL
Limit        : FCC PART 15C PEAK
Env. / Ins.  : 23*C/54%
Engineer     : Alice_Yang
EUT          : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode    : IEEE802.11g 2462MHz Tx
M/N          : CPE210
    
```

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	49.12	43.07	74.00	30.93	Peak
2	2462.000	28.32	5.89	35.70	107.34	105.85	74.00	-31.85	Peak
3	2641.000	28.96	6.15	35.70	45.26	44.67	74.00	29.33	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

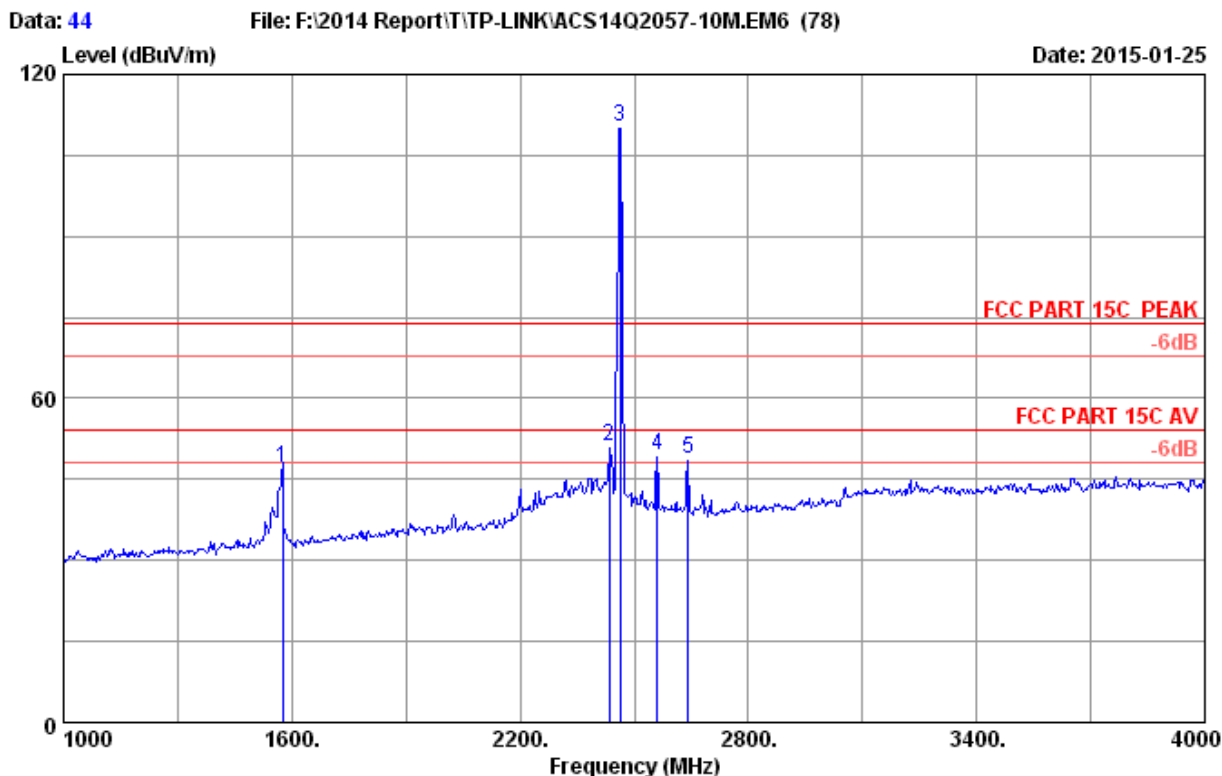


Site no. : 3m Chamber Data no. : 44
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	53.21	47.16	74.00	26.84	Peak
2	2434.000	28.25	5.85	35.70	52.75	51.15	74.00	22.85	Peak
3	2462.000	28.32	5.89	35.70	111.66	110.17	74.00	-36.17	Peak
4	2560.000	28.64	6.03	35.70	50.63	49.60	74.00	24.40	Peak
5	2641.000	28.96	6.15	35.70	49.26	48.67	74.00	25.33	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

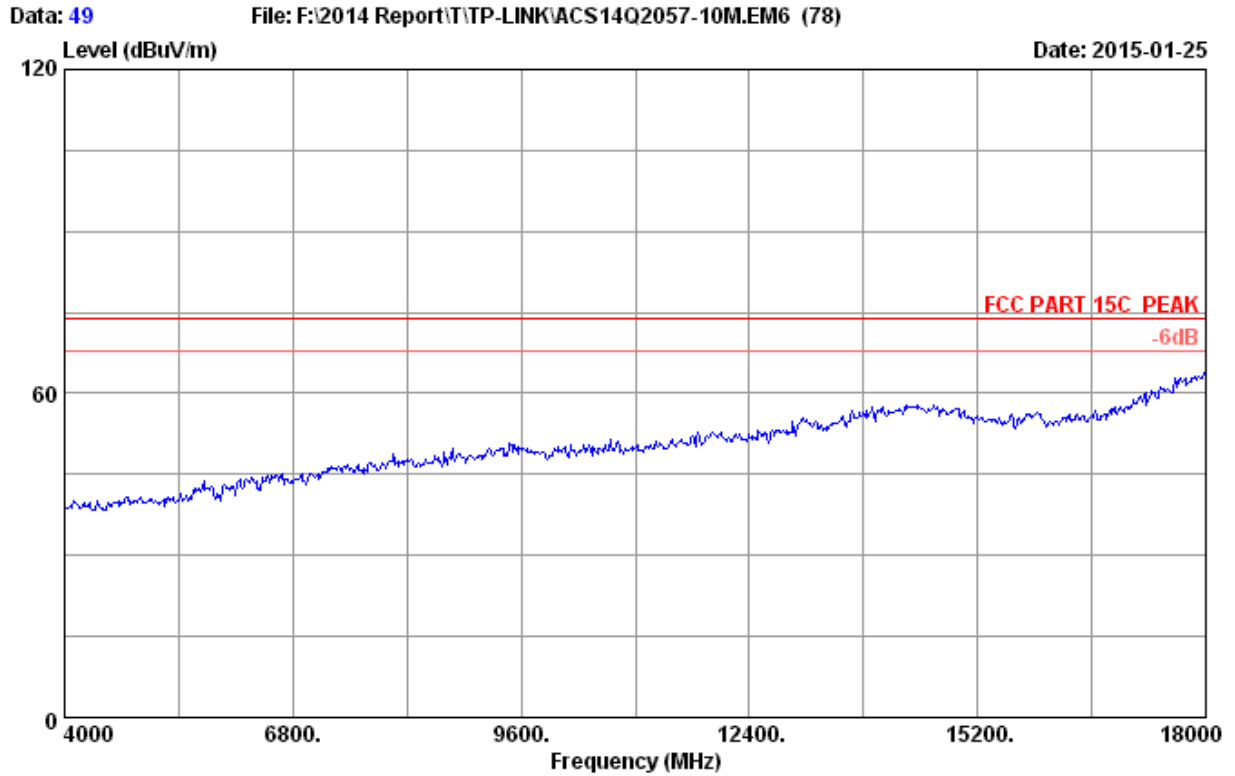


Site no. : 3m Chamber Data no. : 49
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11g 2462MHz Tx
M/N : CPE210

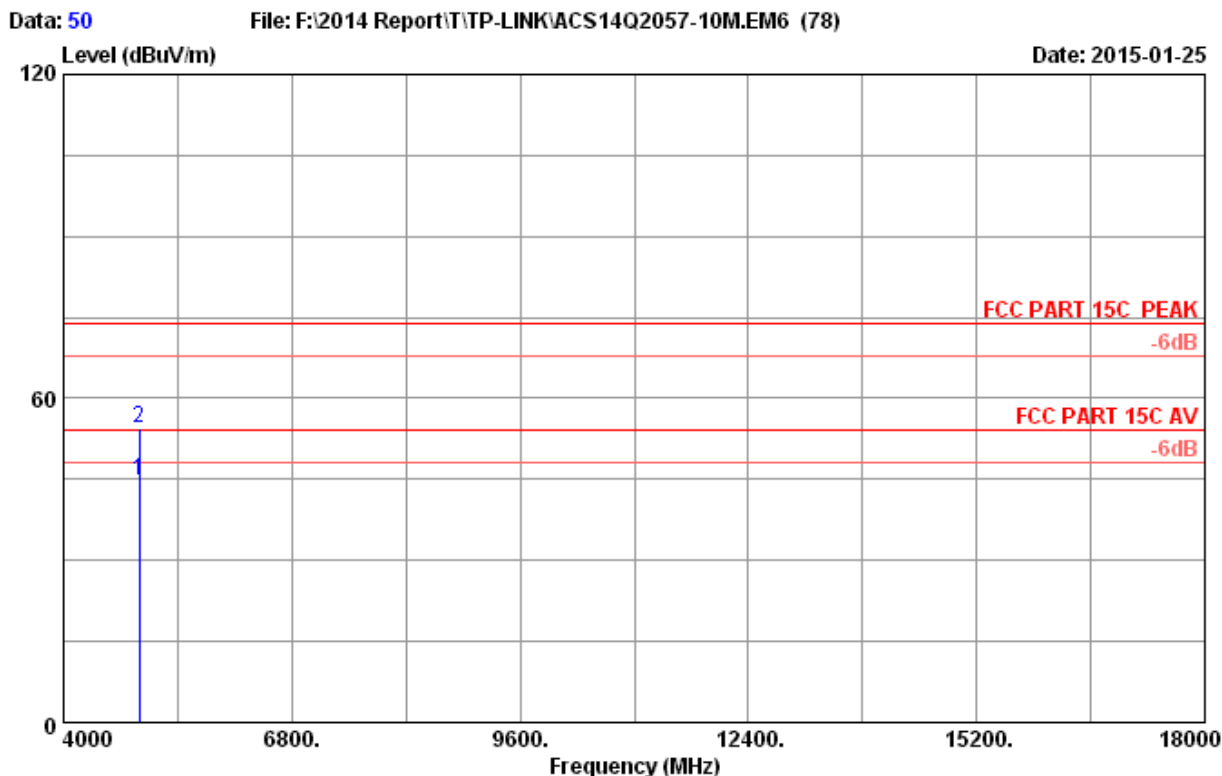


Site no. : 3m Chamber Data no. : 50
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.000	33.06	8.69	35.70	38.84	44.89	54.00	9.11	Average
2	4924.000	33.06	8.69	35.70	48.46	54.51	74.00	19.49	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

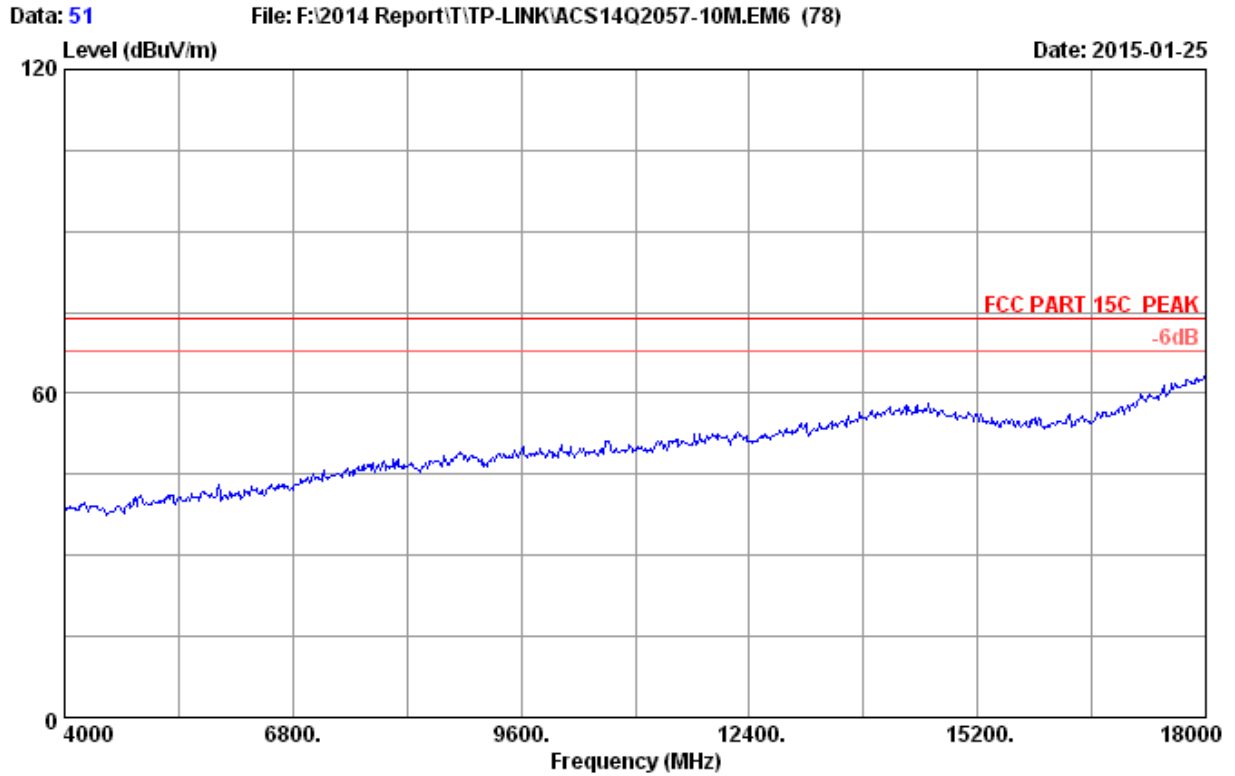


Site no. : 3m Chamber Data no. : 51
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11g 2462MHz Tx
M/N : CPE210

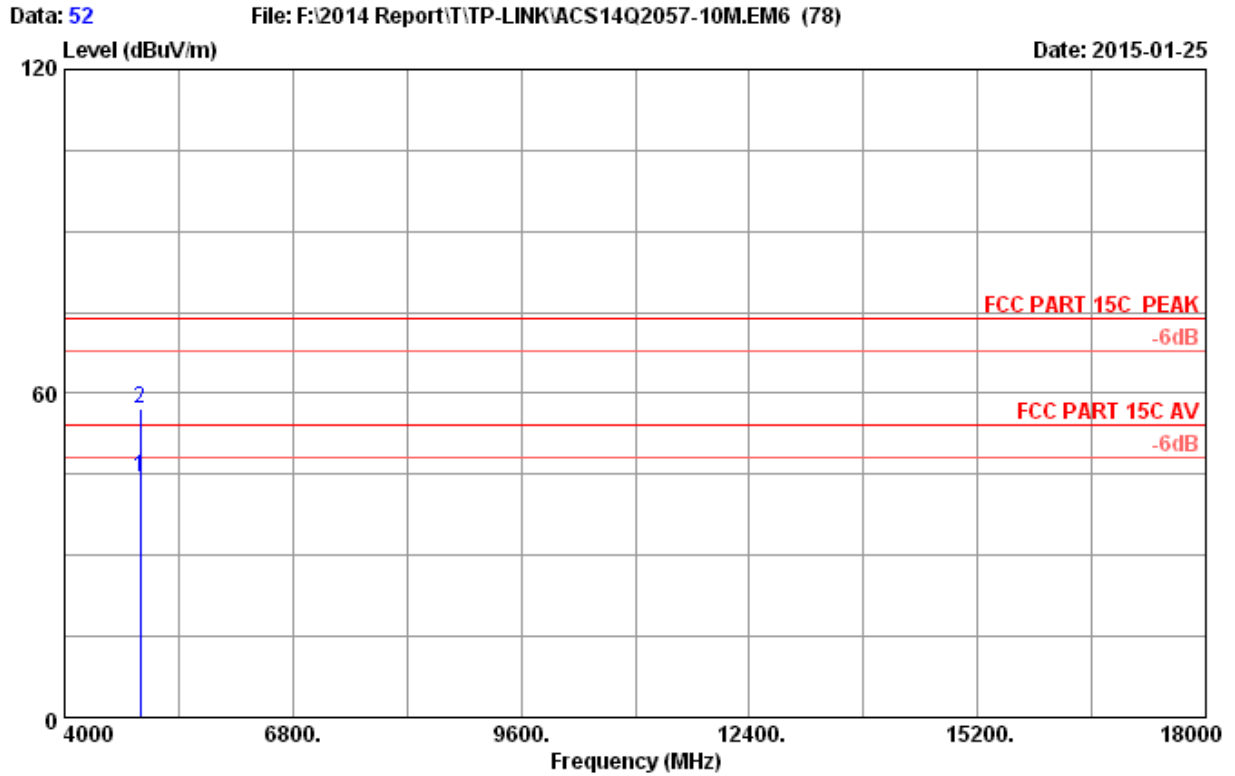

Site no. : 3m Chamber Data no. : 52
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.000	33.06	8.69	35.70	38.29	44.34	54.00	9.66	Average
2	4924.000	33.06	8.69	35.70	51.26	57.31	74.00	16.69	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

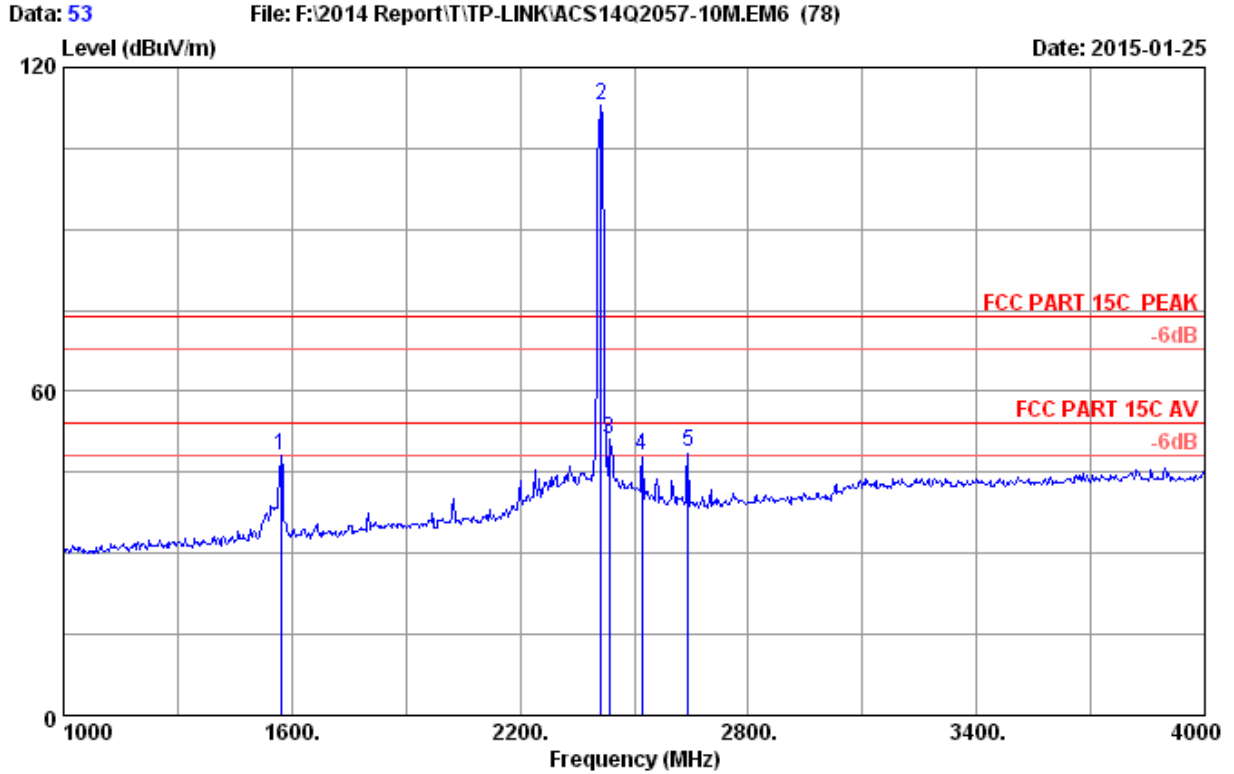

Site no. : 3m Chamber Data no. : 53
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1571.000	25.50	4.59	36.17	54.23	48.15	74.00	25.85	Peak
2	2412.000	28.21	5.81	35.70	114.77	113.09	74.00	-39.09	Peak
3	2434.000	28.25	5.85	35.70	52.88	51.28	74.00	22.72	Peak
4	2521.000	28.48	5.97	35.70	49.30	48.05	74.00	25.95	Peak
5	2641.000	28.96	6.15	35.70	49.51	48.92	74.00	25.08	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

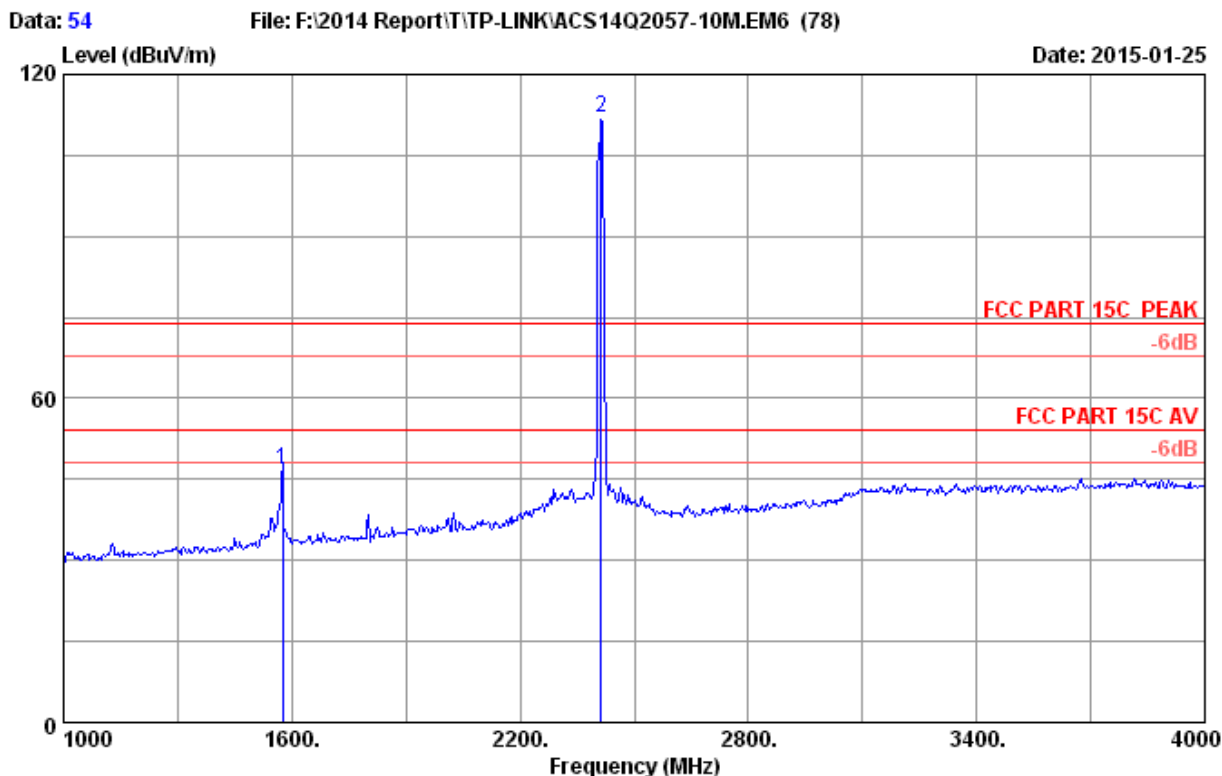

Site no. : 3m Chamber Data no. : 54
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 2412MHz Tx
 M/N : CPE210


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	52.84	46.79	74.00	27.21	Peak
2	2412.000	28.21	5.81	35.70	113.72	112.04	74.00	-38.04	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.


Data: 59

File: F:\2014 Report\T\TP-LINK\ACS14Q2057-10MEM6 (78)

Date: 2015-01-25

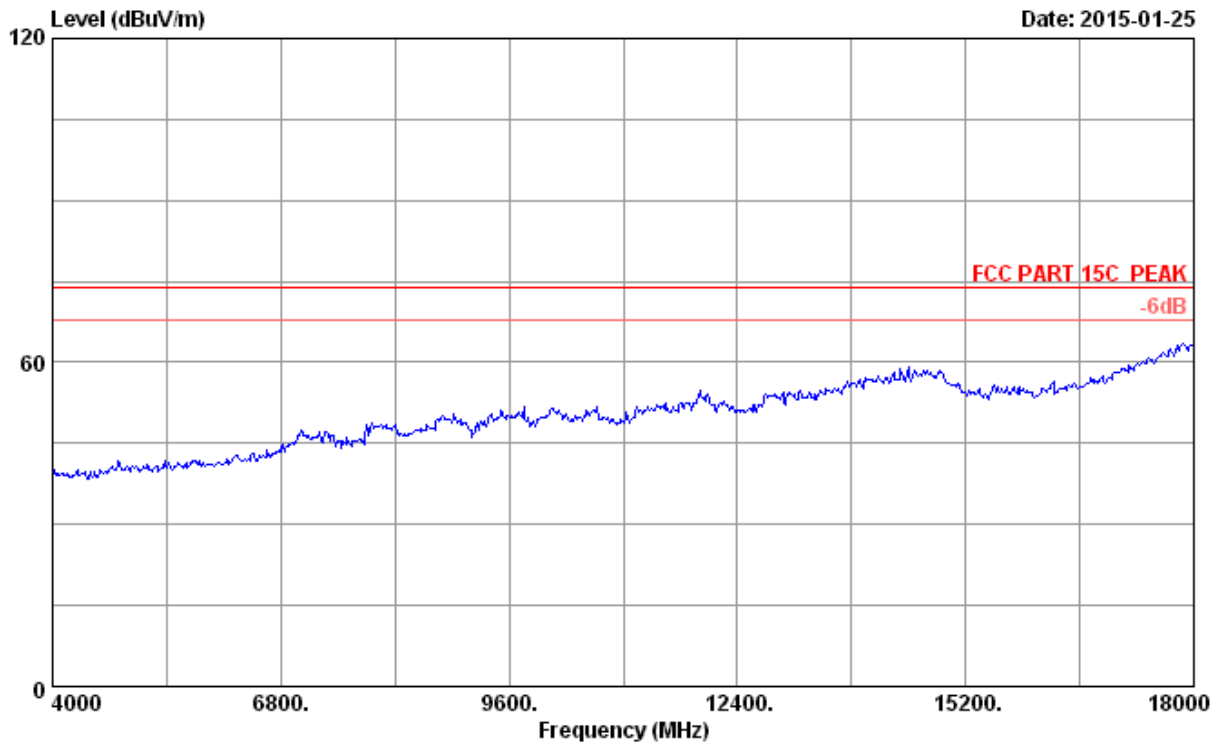


Site no. : 3m Chamber Data no. : 59
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11n HT20 2412MHz Tx
M/N : CPE210

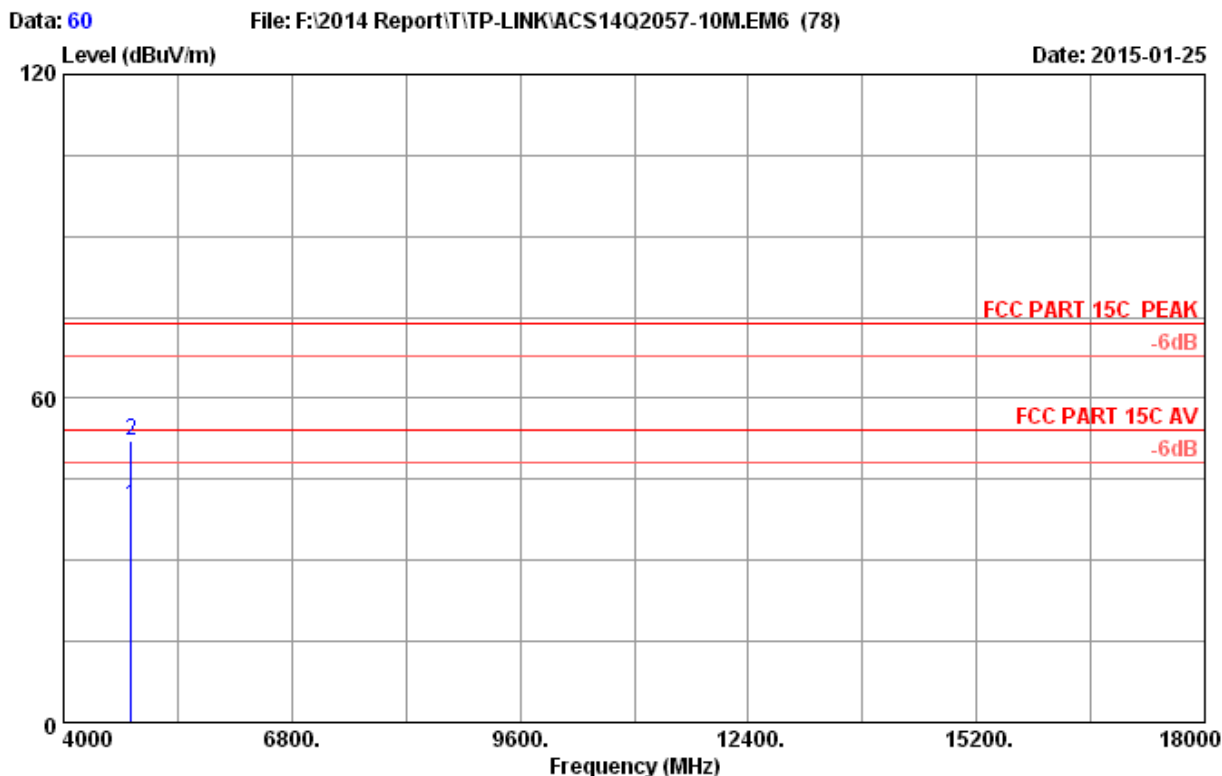


Site no. : 3m Chamber Data no. : 60
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	32.88	8.58	35.70	34.42	40.18	54.00	13.82	Average
2	4824.000	32.88	8.58	35.70	46.28	52.04	74.00	21.96	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

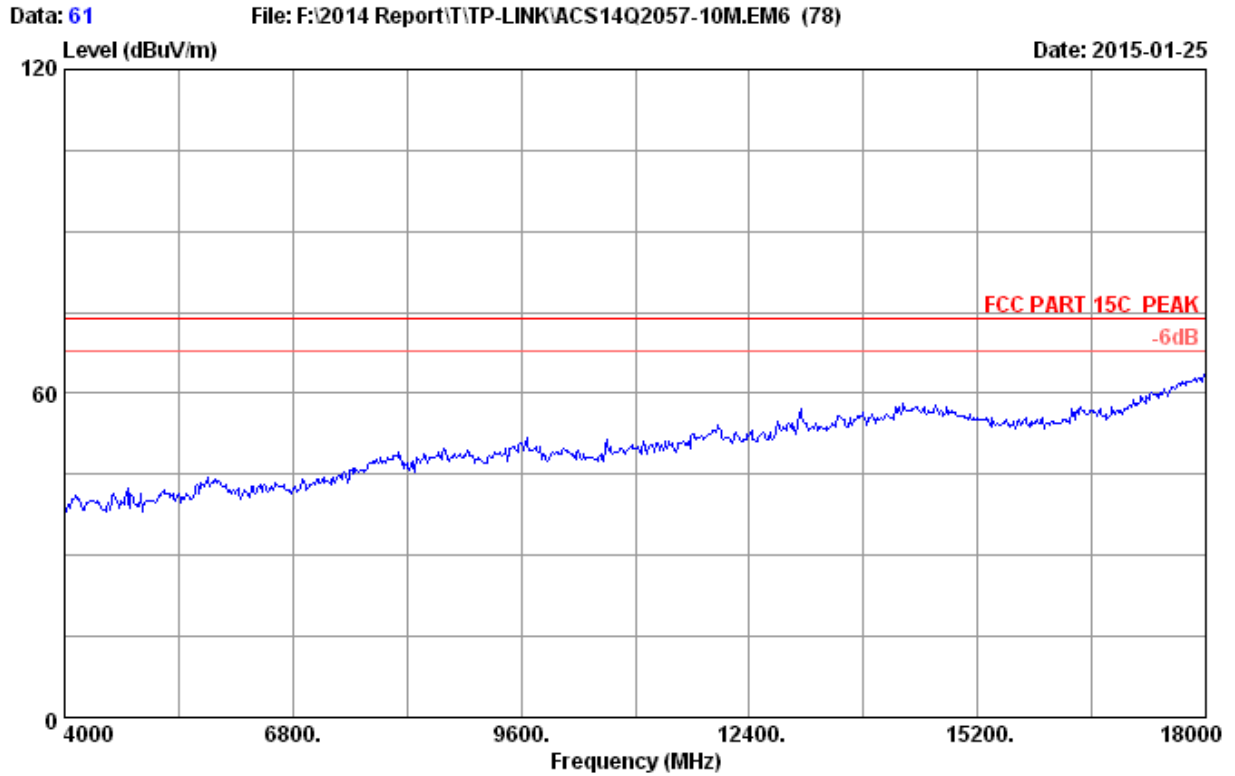


Site no. : 3m Chamber Data no. : 61
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11n HT20 2412MHz Tx
M/N : CPE210

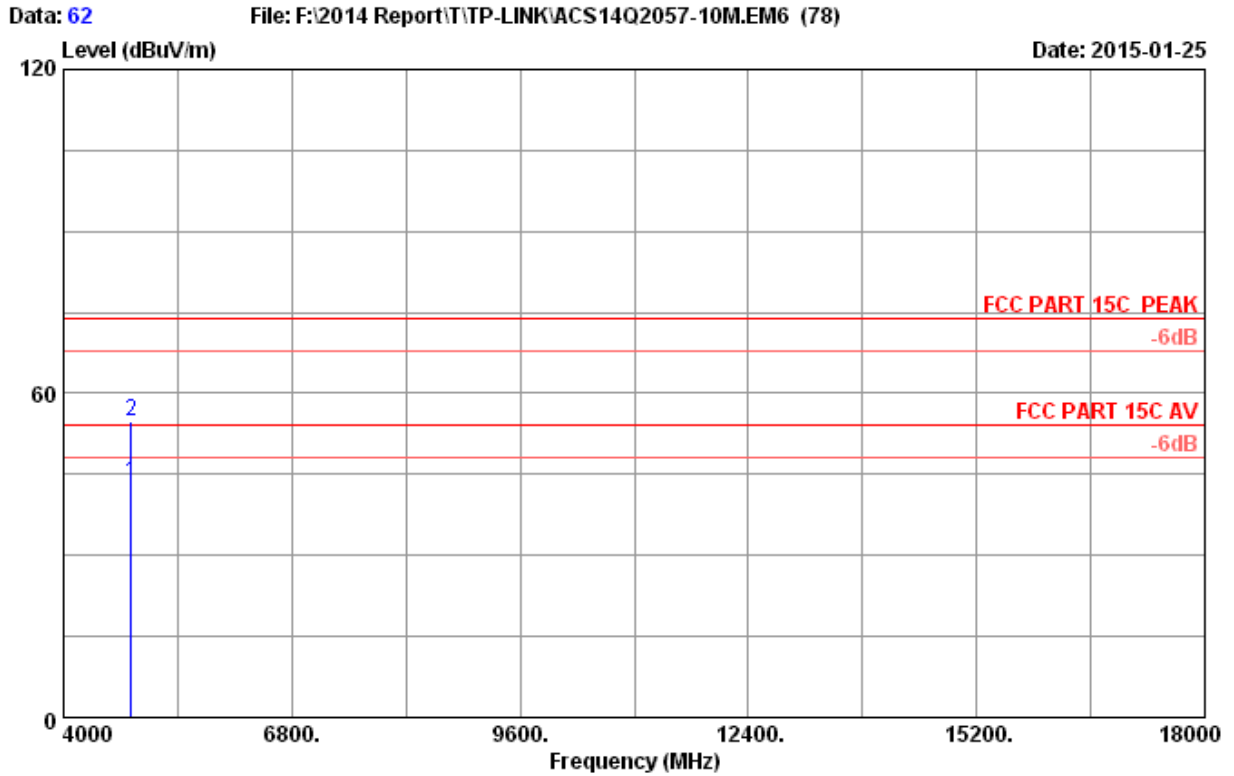

Site no. : 3m Chamber Data no. : 62
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	32.88	8.58	35.70	37.69	43.45	54.00	10.55	Average
2	4824.000	32.88	8.58	35.70	49.02	54.78	74.00	19.22	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

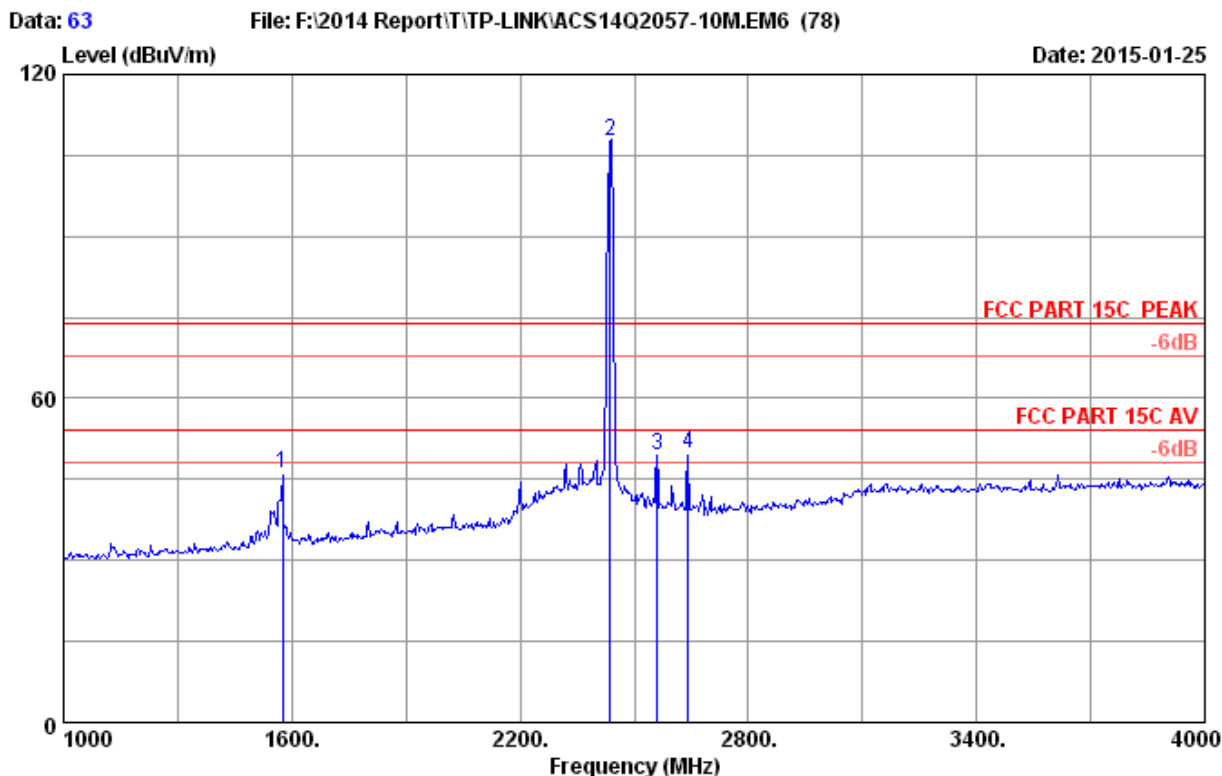

Site no. : 3m Chamber Data no. : 63
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 2437MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	52.34	46.29	74.00	27.71	Peak
2	2437.000	28.26	5.85	35.70	109.22	107.63	74.00	-33.63	Peak
3	2560.000	28.64	6.03	35.70	50.49	49.46	74.00	24.54	Peak
4	2641.000	28.96	6.15	35.70	50.26	49.67	74.00	24.33	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

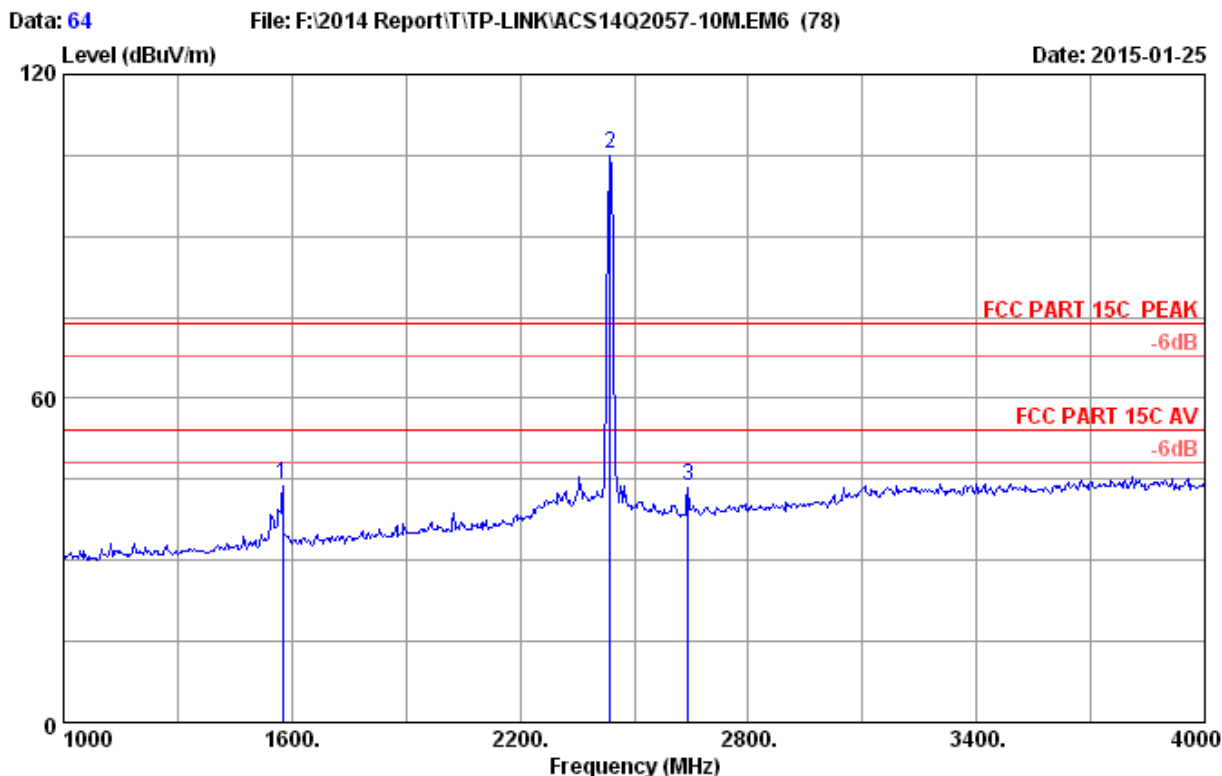


```


Site no.      : 3m Chamber                      Data no.   : 64
Dis. / Ant.  : 3m 2014 3115 (4580)             Ant. pol.  : VERTICAL
Limit        : FCC PART 15C PEAK
Env. / Ins.  : 23*C/54%
Engineer     : Alice_Yang
EUT          : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode    : IEEE802.11n HT20 2437MHz Tx
M/N         : CPE210
    
```

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	50.28	44.23	74.00	29.77	Peak
2	2437.000	28.26	5.85	35.70	106.75	105.16	74.00	-31.16	Peak
3	2641.000	28.96	6.15	35.70	44.32	43.73	74.00	30.27	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

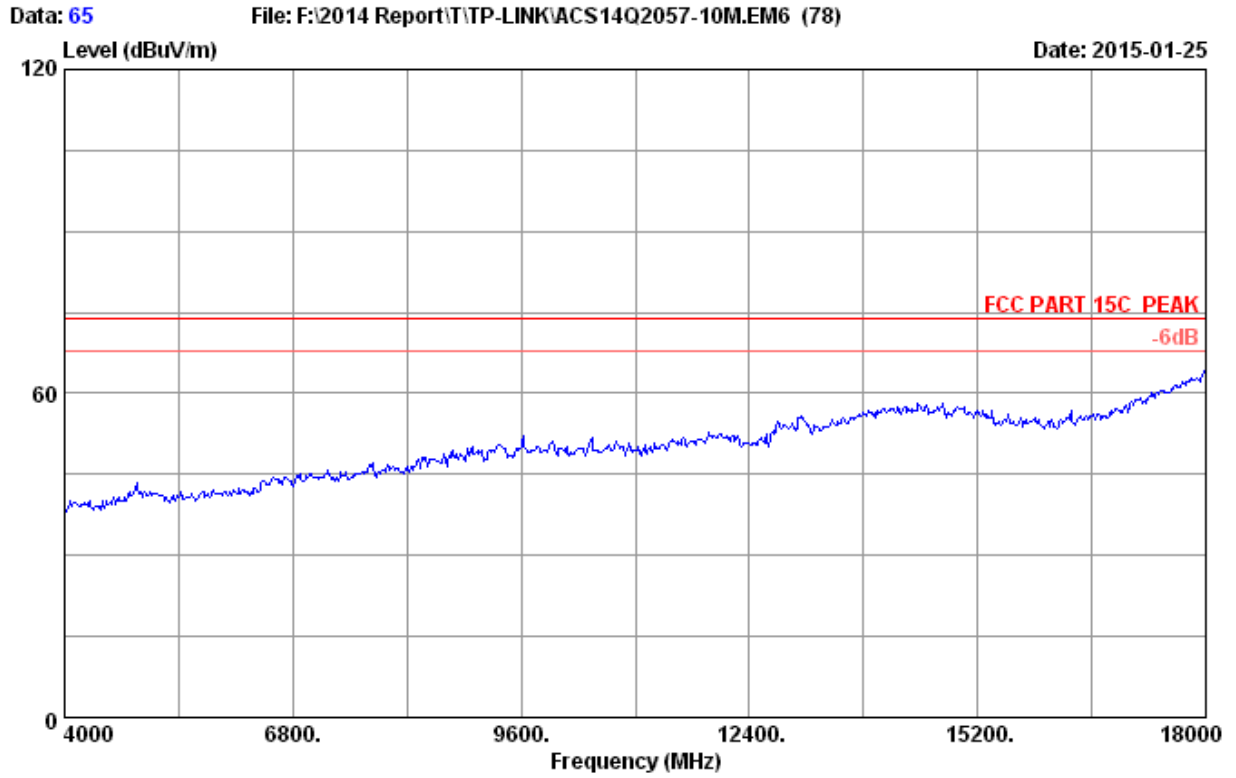


Site no. : 3m Chamber Data no. : 65
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11n HT20 2437MHz Tx
M/N : CPE210

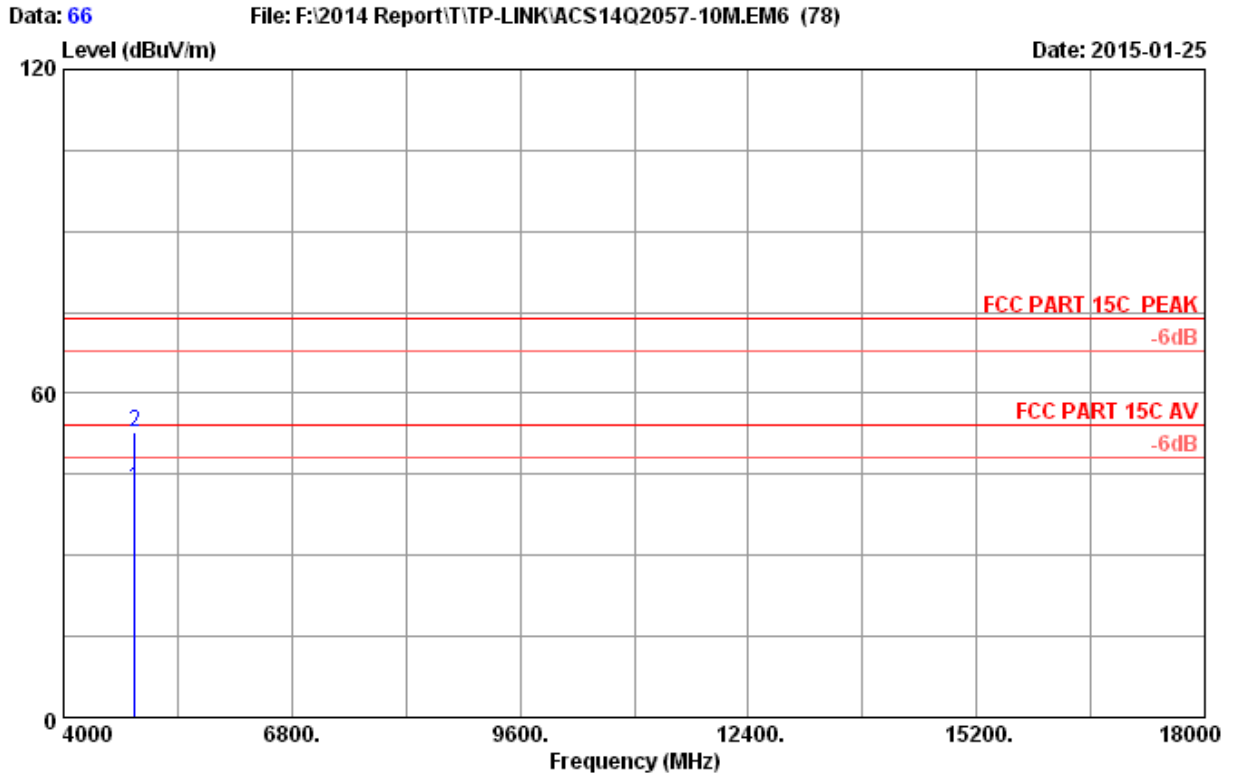

Site no. : 3m Chamber Data no. : 66
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 2437MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	32.97	8.63	35.70	36.43	42.33	54.00	11.67	Average
2	4874.000	32.97	8.63	35.70	47.02	52.92	74.00	21.08	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

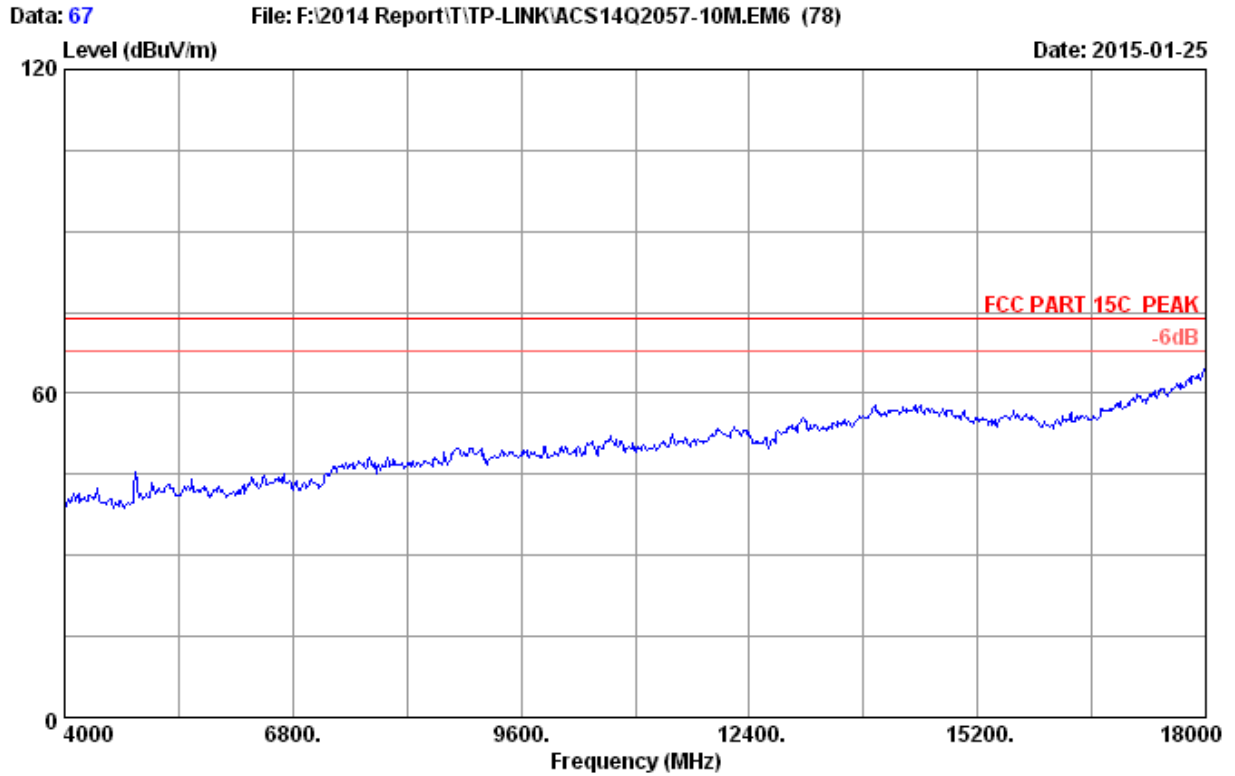


Site no. : 3m Chamber Data no. : 67
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11n HT20 2437MHz Tx
M/N : CPE210

Data: 68

File: F:\2014 Report\T\TP-LINK\ACS14Q2057-10MEM6 (78)


Date: 2015-01-25

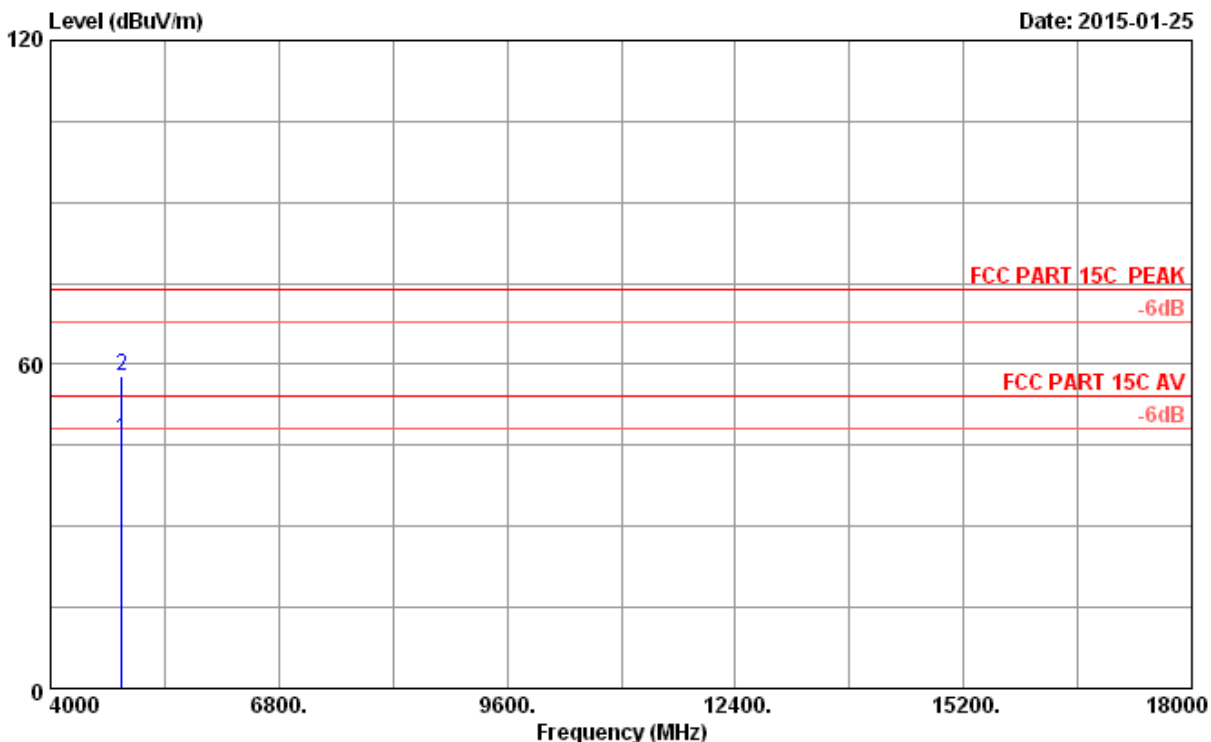

Site no. : 3m Chamber Data no. : 68
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	32.97	8.63	35.70	40.34	46.24	54.00	7.76	Average
2	4874.000	32.97	8.63	35.70	51.90	57.80	74.00	16.20	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

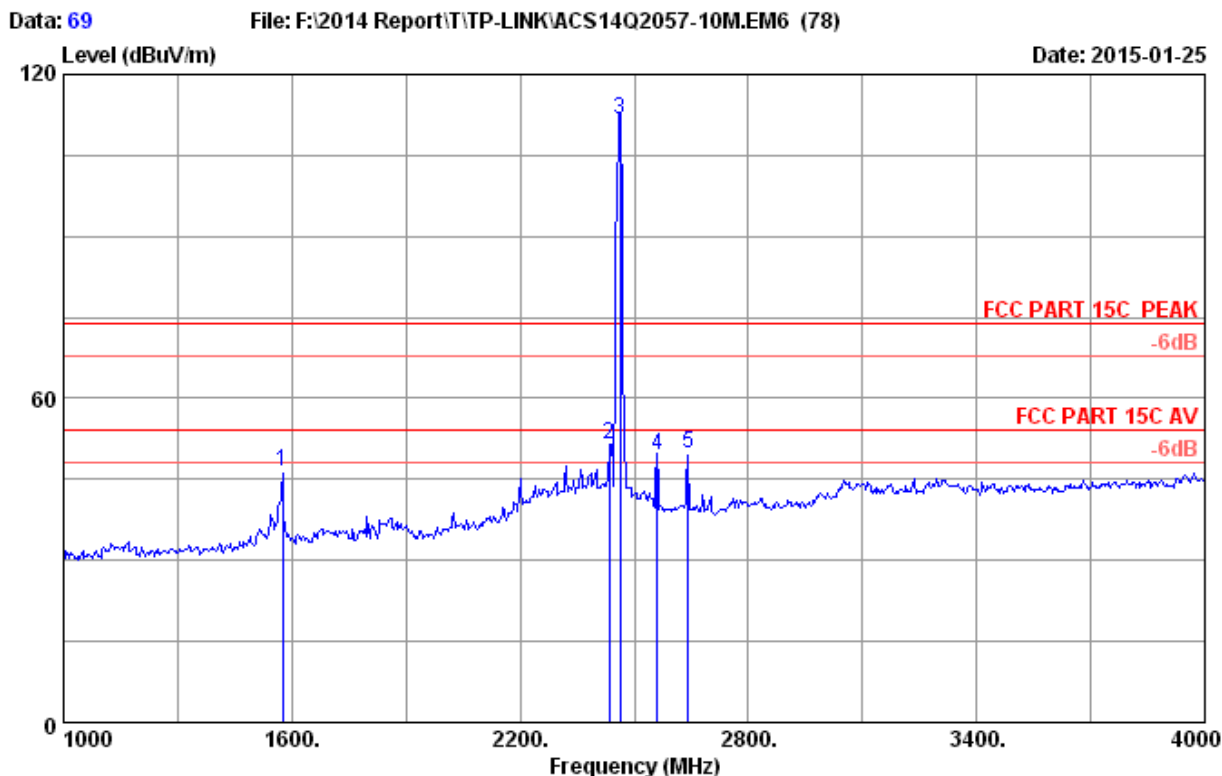

Site no. : 3m Chamber Data no. : 69
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	52.39	46.34	74.00	27.66	Peak
2	2434.000	28.25	5.85	35.70	53.21	51.61	74.00	22.39	Peak
3	2462.000	28.32	5.89	35.70	113.20	111.71	74.00	-37.71	Peak
4	2560.000	28.64	6.03	35.70	50.48	49.45	74.00	24.55	Peak
5	2641.000	28.96	6.15	35.70	50.29	49.70	74.00	24.30	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

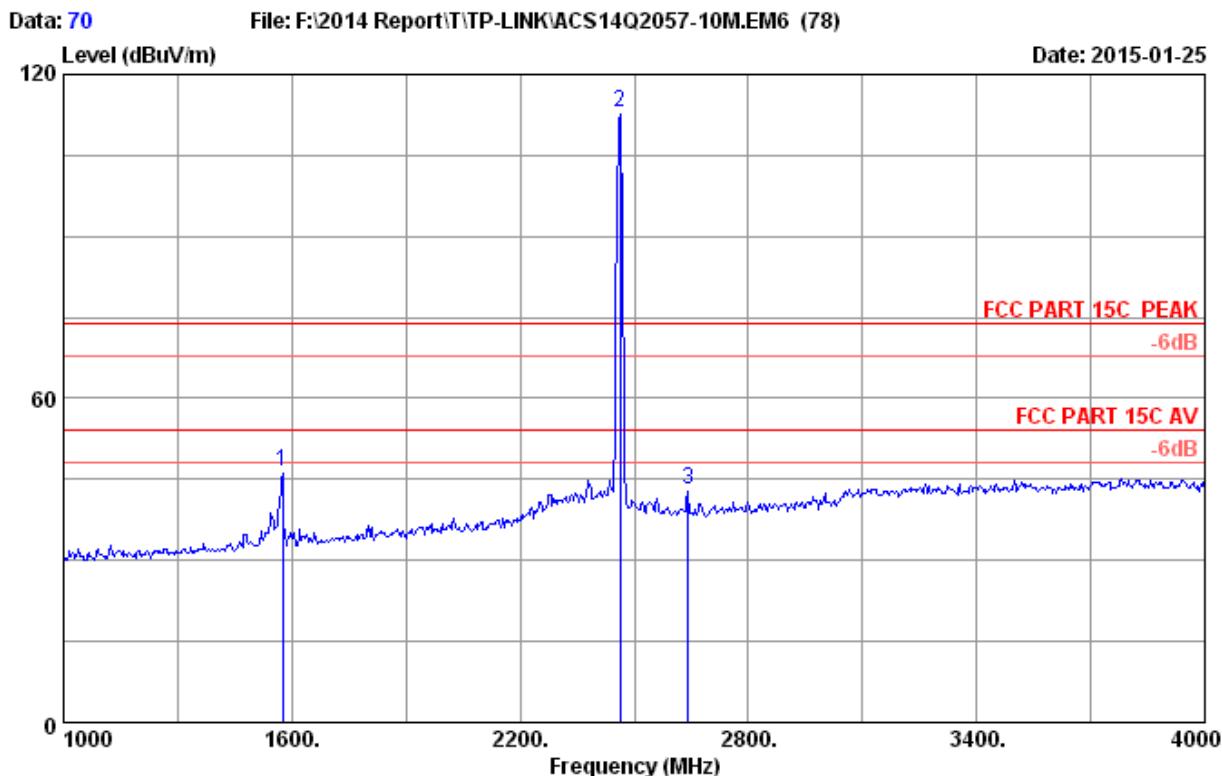


```

Site no.      : 3m Chamber                      Data no.   : 70
Dis. / Ant.  : 3m 2014 3115 (4580)             Ant. pol.  : VERTICAL
Limit        : FCC PART 15C PEAK
Env. / Ins.  : 23*C/54%
Engineer     : Alice_Yang
EUT          : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode    : IEEE802.11n HT20 2462MHz Tx
M/N         : CPE210
    
```

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	52.44	46.39	74.00	27.61	Peak
2	2462.000	28.32	5.89	35.70	114.32	112.83	74.00	-38.83	Peak
3	2641.000	28.96	6.15	35.70	43.82	43.23	74.00	30.77	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

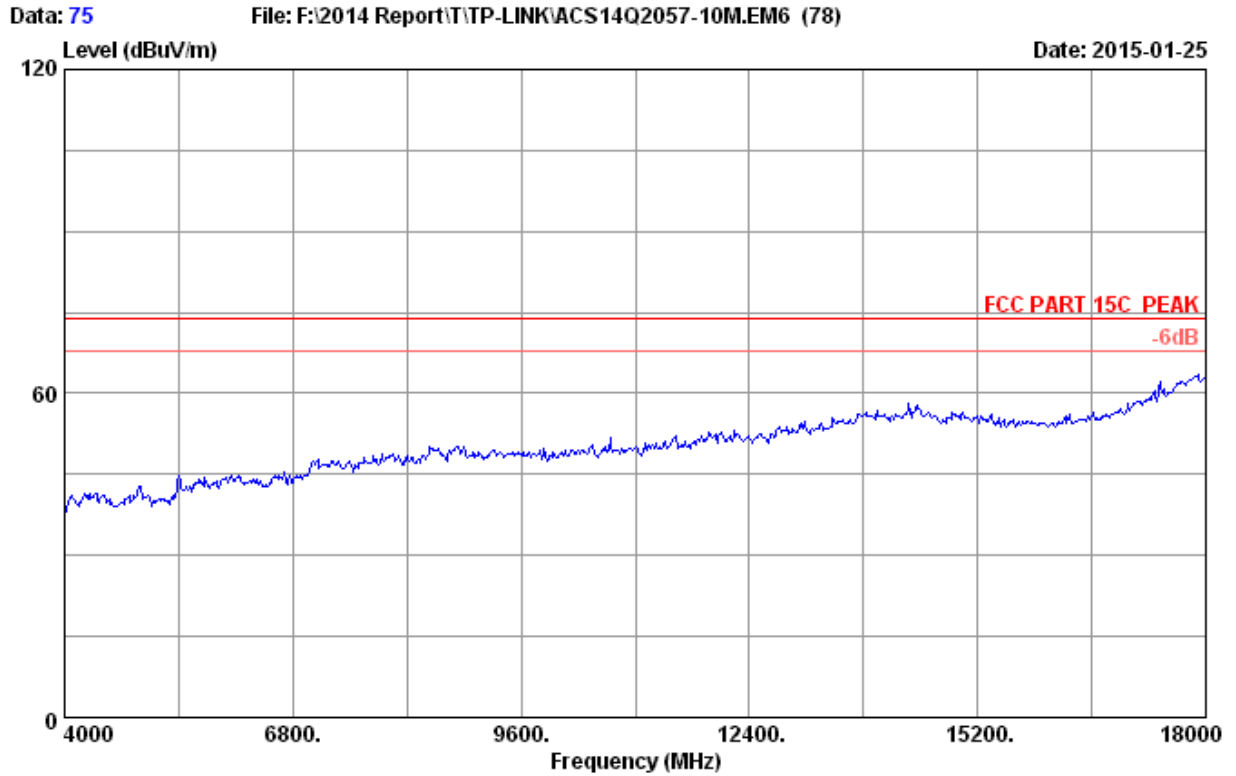


Site no. : 3m Chamber Data no. : 75
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11n HT20 2462MHz Tx
M/N : CPE210

Data: 76

File: F:\2014 Report\T\TP-LINK\ACS14Q2057-10MEM6 (78)


Date: 2015-01-25

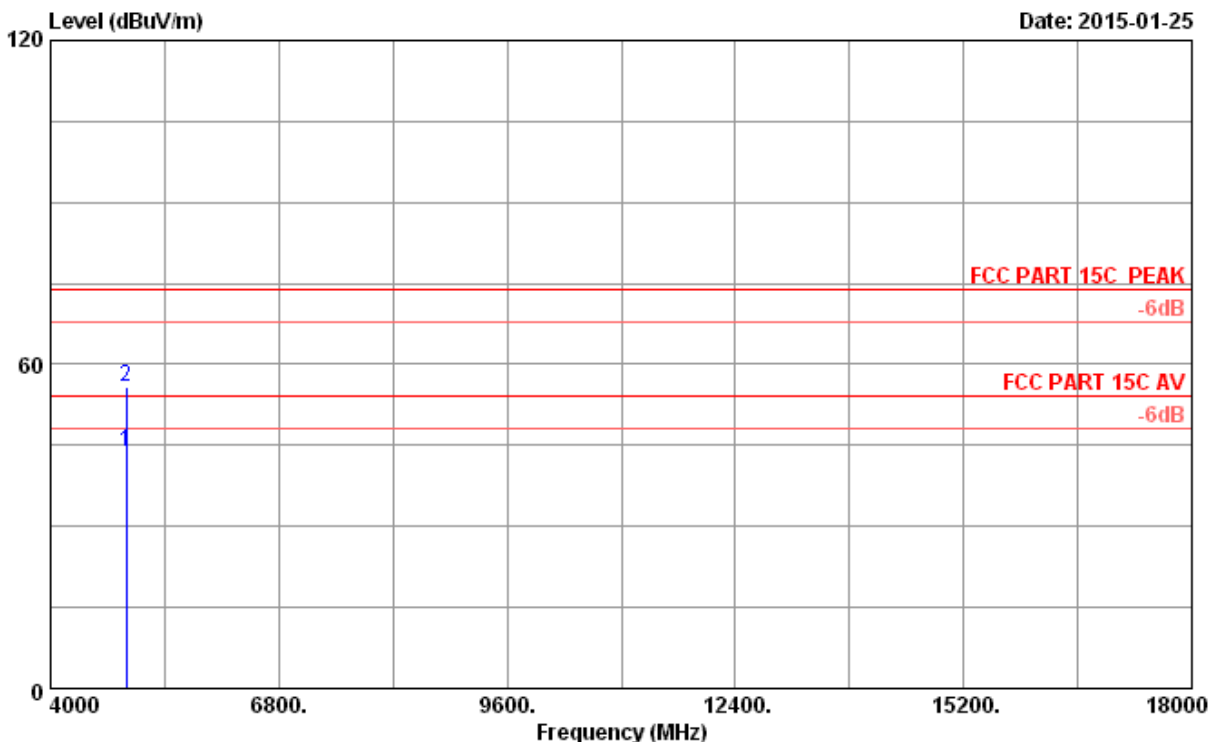


Site no. : 3m Chamber Data no. : 76
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.000	33.06	8.69	35.70	37.72	43.77	54.00	10.23	Average
2	4924.000	33.06	8.69	35.70	49.71	55.76	74.00	18.24	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

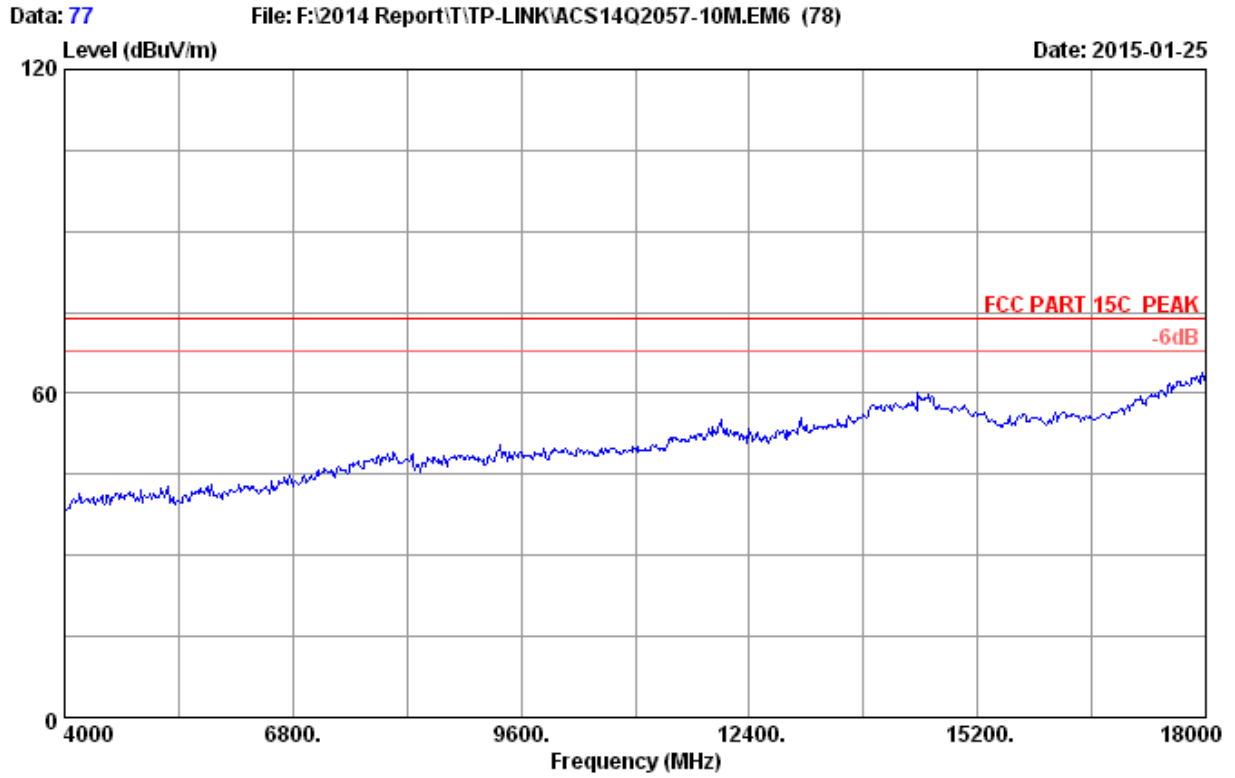

Site no. : 3m Chamber Data no. : 77
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11n HT20 2462MHz Tx
M/N : CPE210

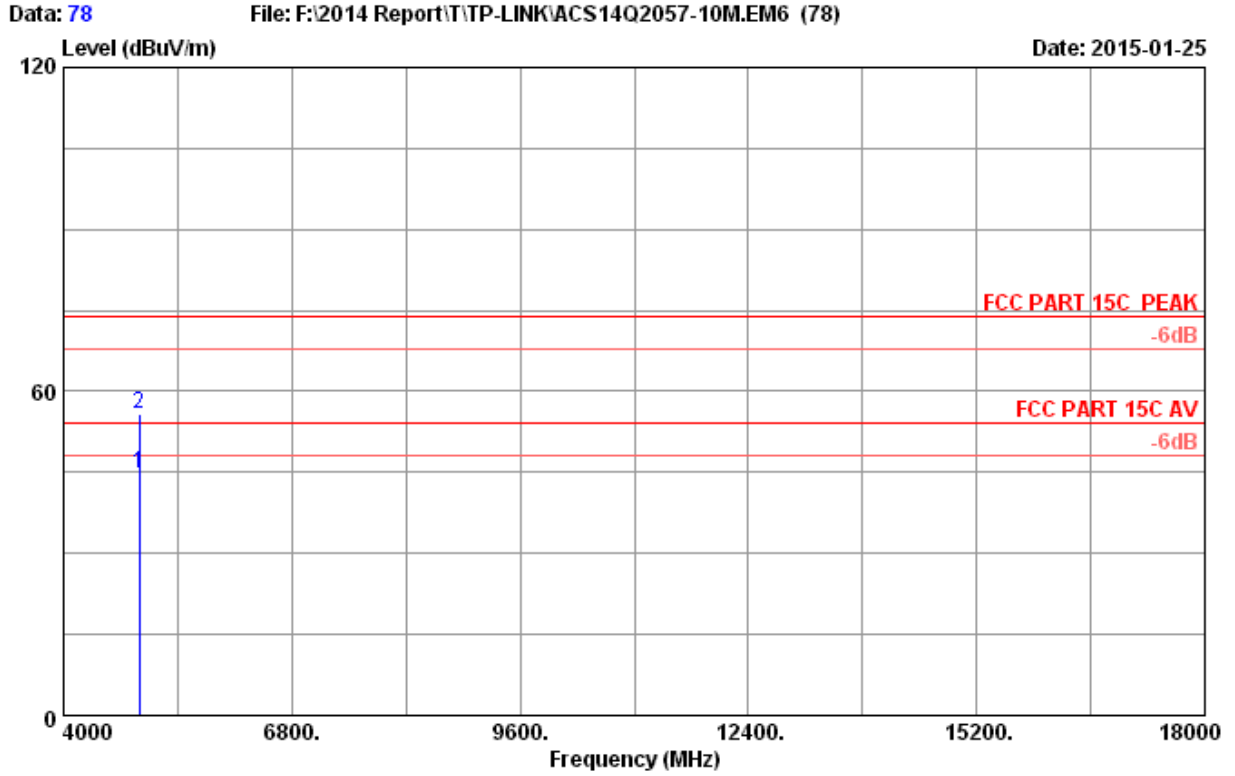

Site no. : 3m Chamber Data no. : 78
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.000	33.06	8.69	35.70	38.68	44.73	54.00	9.27	Average
2	4924.000	33.06	8.69	35.70	49.62	55.67	74.00	18.33	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

20MHz
Frequency: 30MHz~1GHz

Data: 11

File: E:\2014 Report Data\T\TP-LINK\ACS14Q2057.EM6 (18)

Date: 2015-01-25

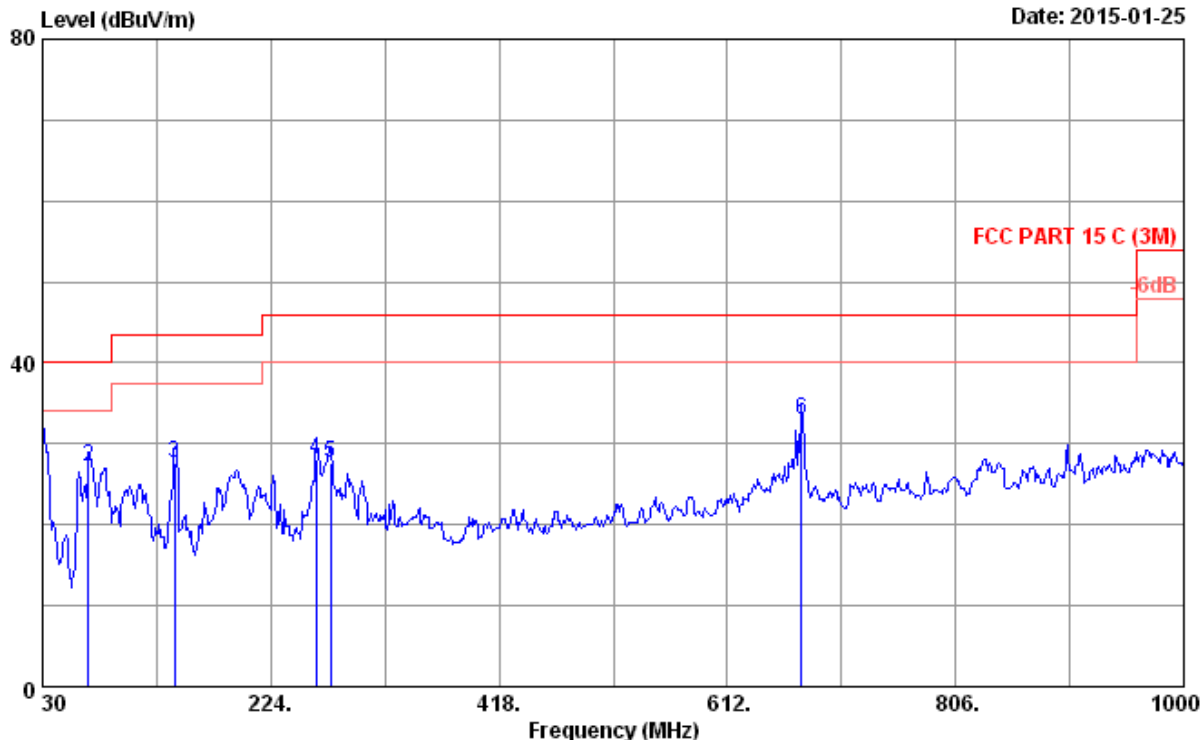

Site no. : 3m Chamber Data no. : 11
 Dis. / Ant. : 3m 2013 CBL6112D 35375 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 22.5°C/47% Engineer : Leo-Li
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : Tx Mode
 M/N:CPE210


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	30.000	20.10	0.83	9.44	30.37	40.00	9.63	QP
2	68.800	6.74	1.27	19.07	27.08	40.00	12.92	QP
3	142.520	11.77	1.57	14.25	27.59	43.50	15.91	QP
4	262.800	13.96	2.03	12.02	28.01	46.00	17.99	QP
5	274.440	13.50	2.07	12.14	27.71	46.00	18.29	QP
6	675.050	19.80	3.25	9.92	32.97	46.00	13.03	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Data: 12

File: E:\2014 Report Data\T\TP-LINK\ACS14Q2057.EM6 (18)

Date: 2015-01-25

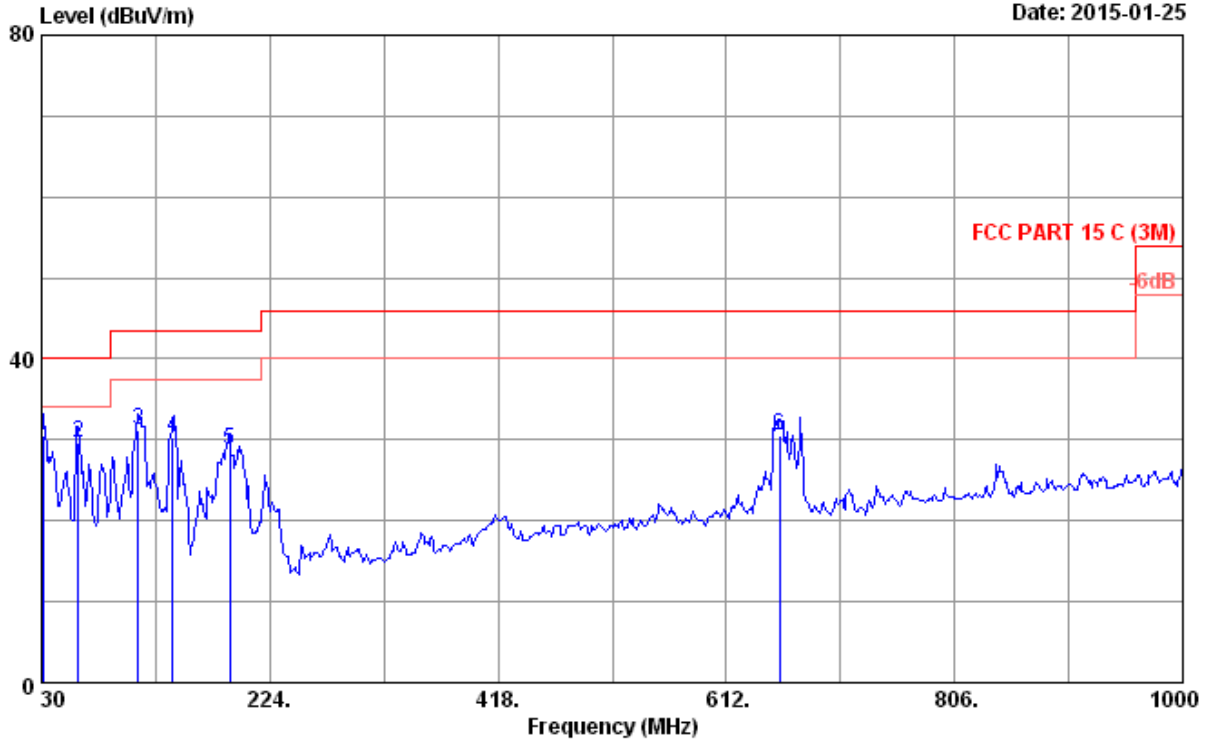

Site no. : 3m Chamber Data no. : 12
 Dis. / Ant. : 3m 2013 CBL6112D 35375 Ant. pol. : VERTICAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 22.5°C/47% Engineer : Leo-Li
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : Tx Mode
 M/N:CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	31.940	18.84	0.86	10.79	30.49	40.00	9.51	QP
2	61.040	6.65	1.24	21.80	29.69	40.00	10.31	QP
3	112.450	12.45	1.46	17.25	31.16	43.50	12.34	QP
4	141.550	11.89	1.57	16.90	30.36	43.50	13.14	QP
5	190.050	9.70	1.75	17.30	28.75	43.50	14.75	QP
6	657.590	19.60	3.20	7.66	30.46	46.00	15.54	QP


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Frequency: 1GHz~18GHz

Data: 1

File: F:\2014 Report\T\TP-LINK\ACS14Q2057-20M.EM6 (104)


Date: 2015-01-25

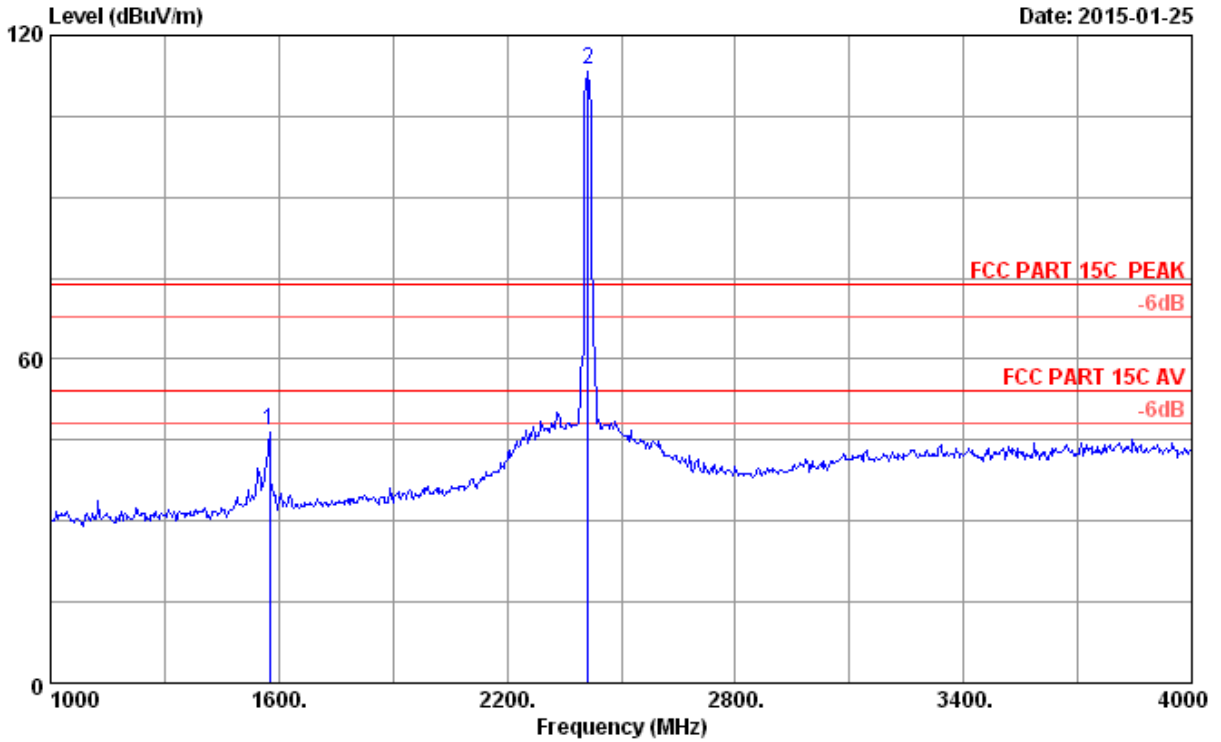

Site no. : 3m Chamber Data no. : 1
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	52.96	46.91	74.00	27.09	Peak
2	2412.000	28.21	5.81	35.70	115.48	113.80	74.00	-39.80	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

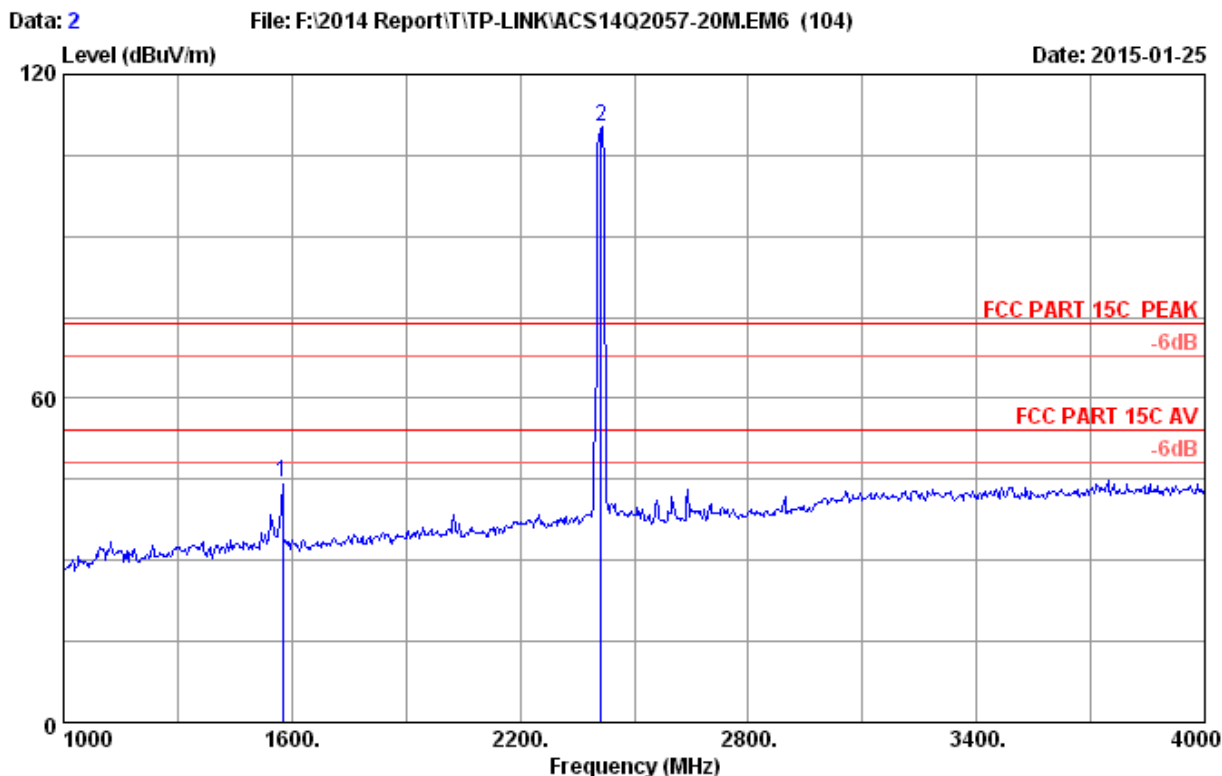


Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	50.39	44.34	74.00	29.66	Peak
2	2412.000	28.21	5.81	35.70	112.08	110.40	74.00	-36.40	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

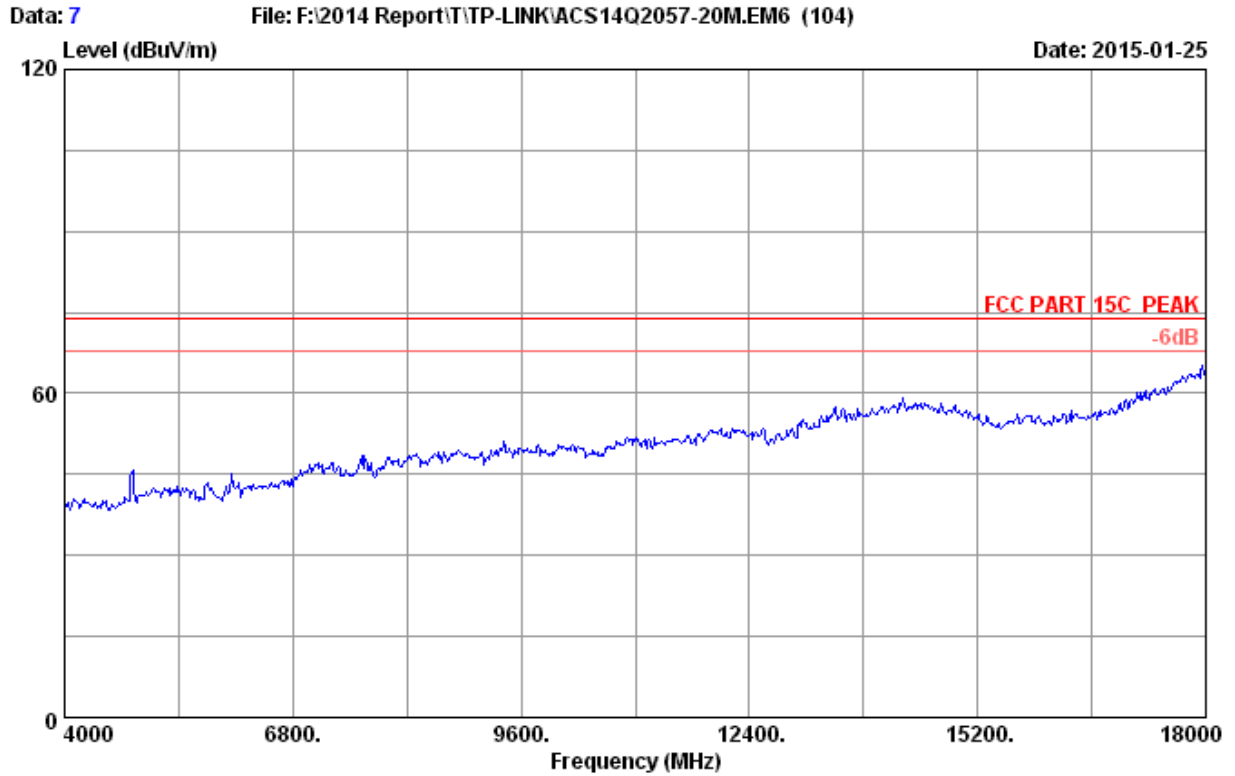


Site no. : 3m Chamber Data no. : 7
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11b 2412MHz Tx
M/N : CPE210

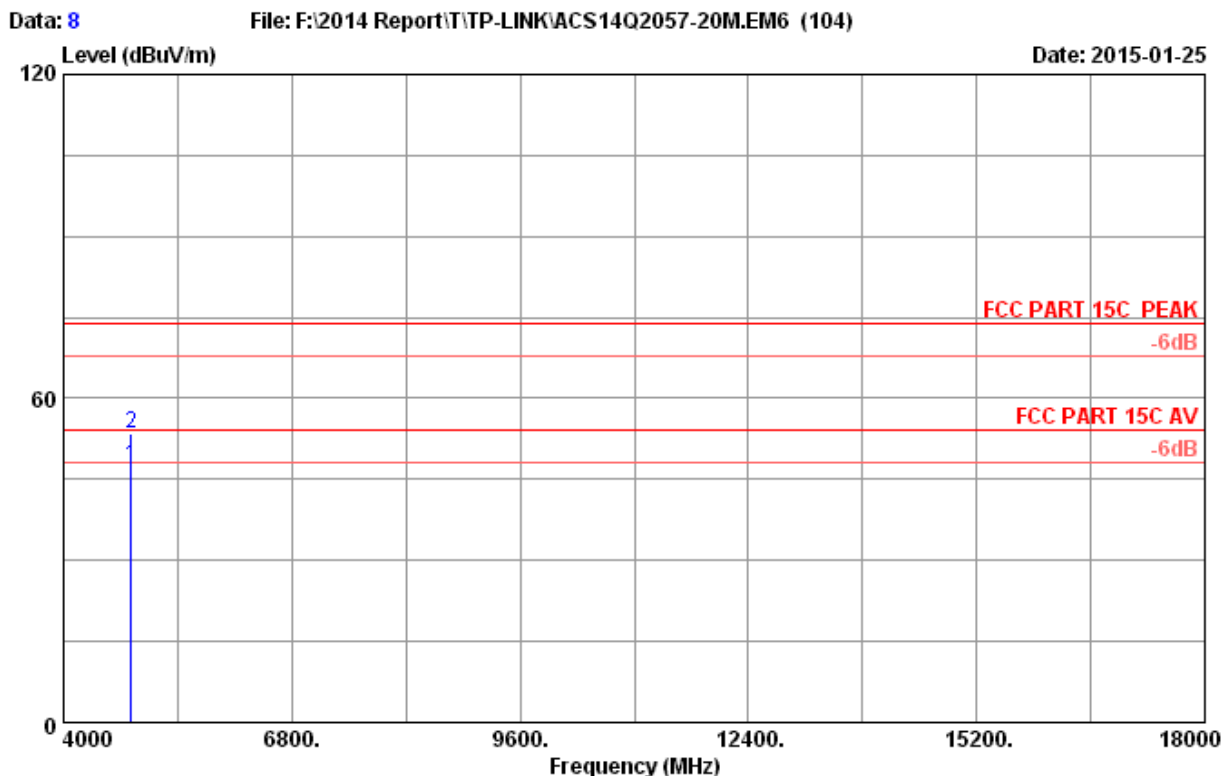


Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	32.88	8.58	35.70	41.55	47.31	54.00	6.69	Average
2	4824.000	32.88	8.58	35.70	47.56	53.32	74.00	20.68	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

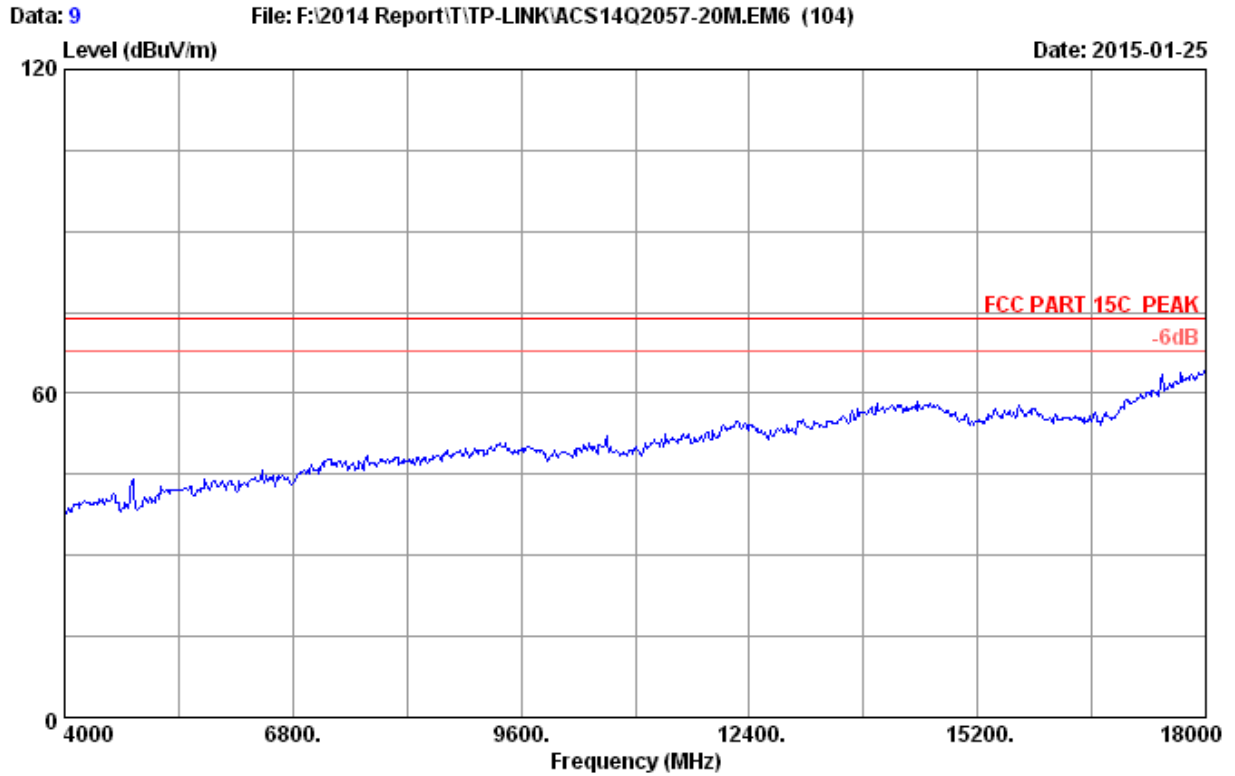


Site no. : 3m Chamber Data no. : 9
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11b 2412MHz Tx
M/N : CPE210

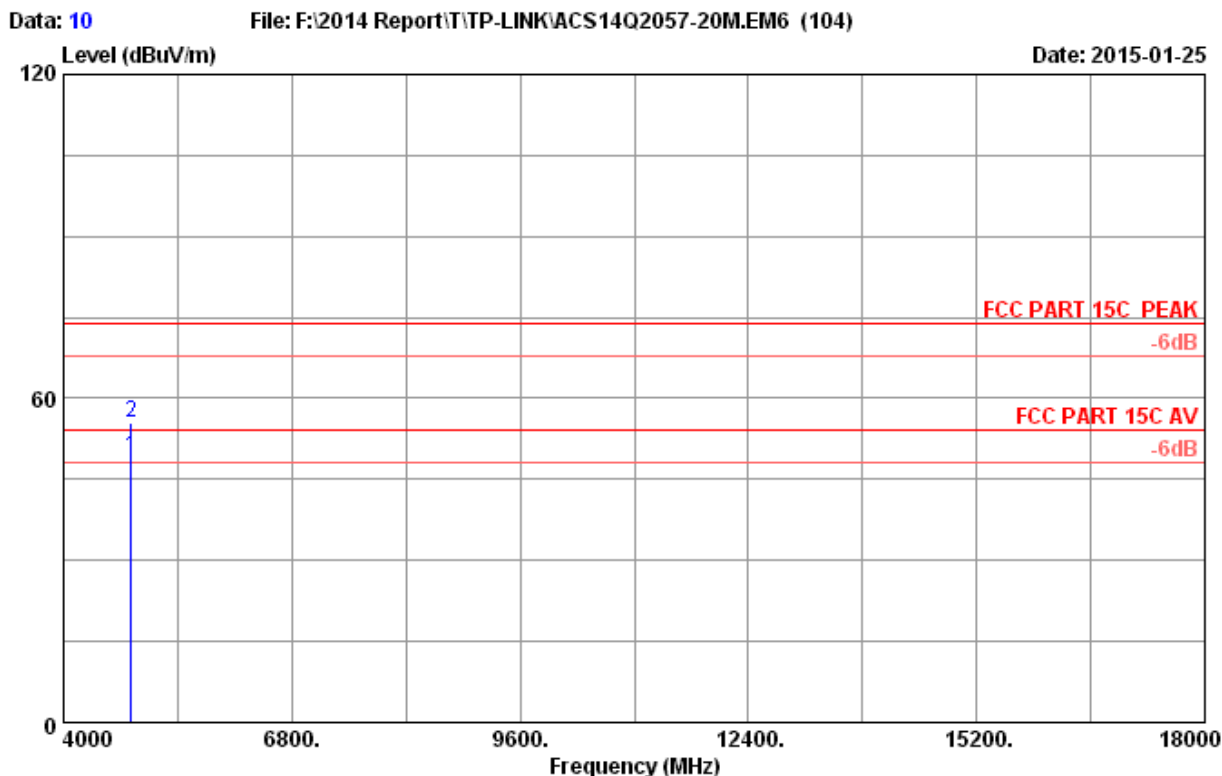


Site no. : 3m Chamber Data no. : 10
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	32.88	8.58	35.70	43.36	49.12	54.00	4.88	Average
2	4824.000	32.88	8.58	35.70	49.58	55.34	74.00	18.66	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

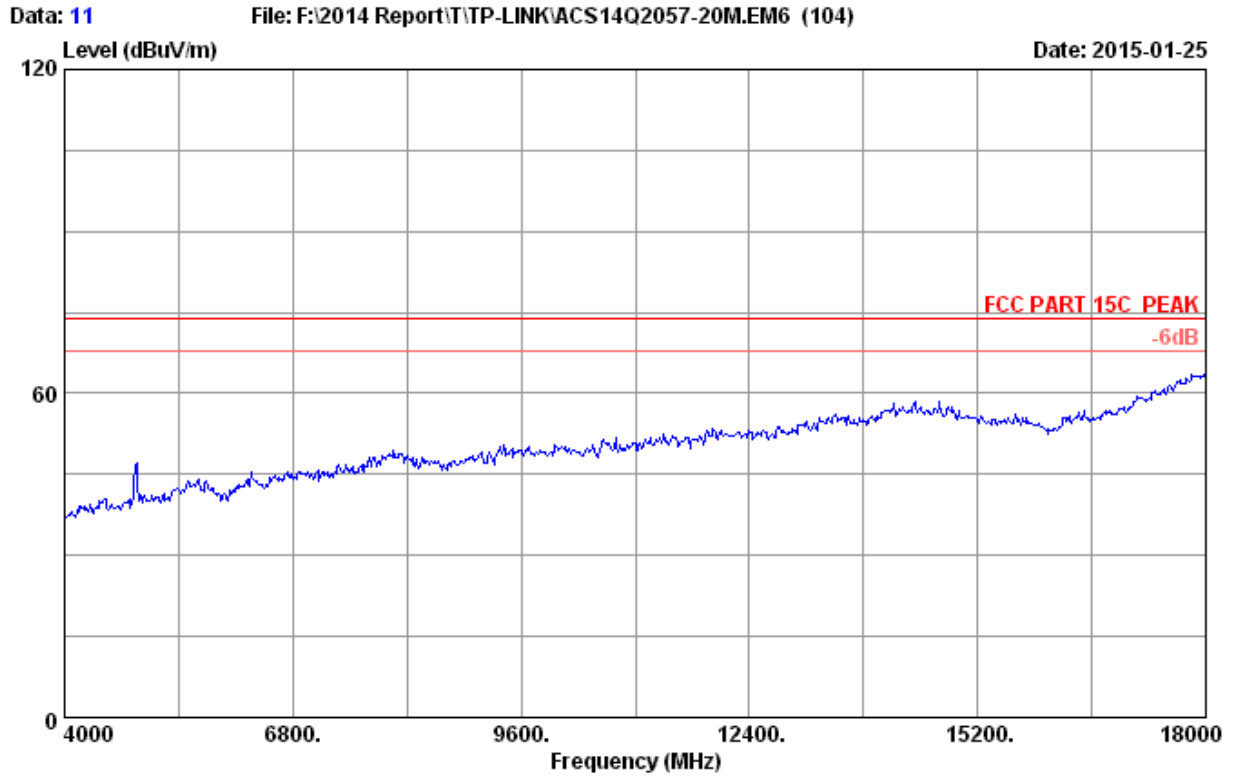


Site no. : 3m Chamber Data no. : 11
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11b 2437MHz Tx
M/N : CPE210

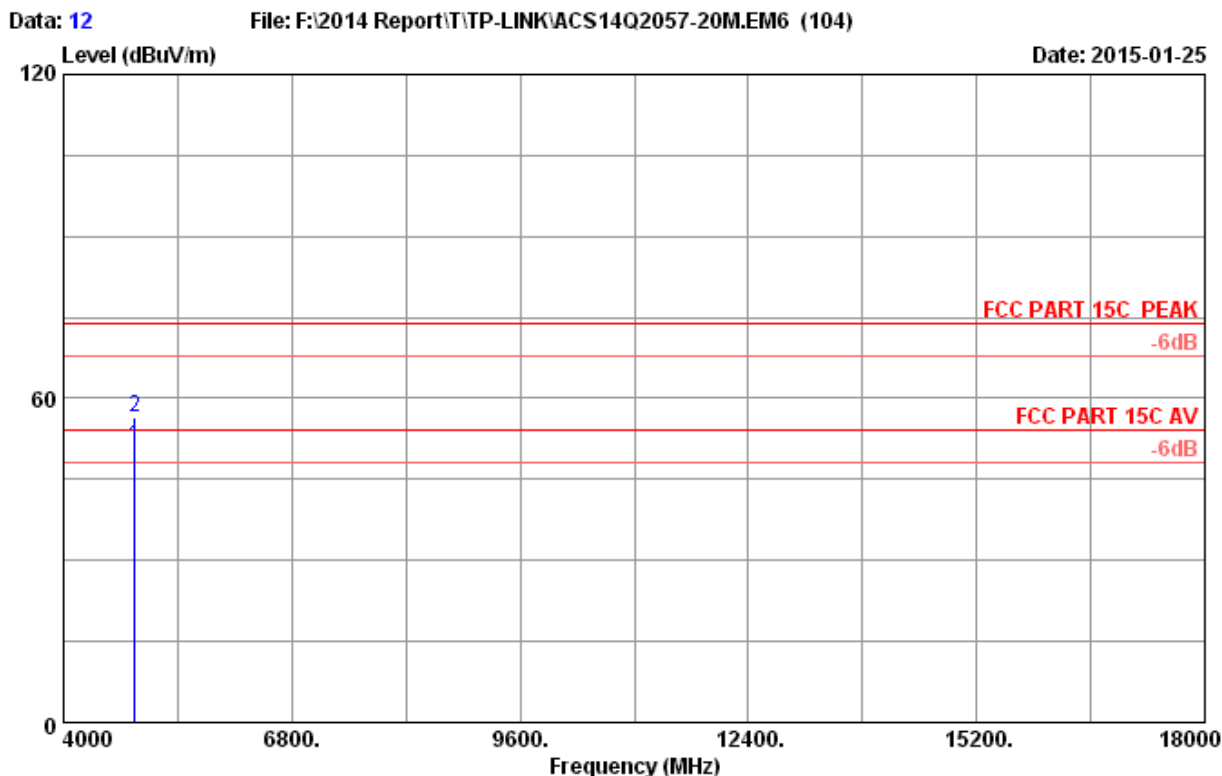


Site no. : 3m Chamber Data no. : 12
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2437MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	32.97	8.63	35.70	45.22	51.12	54.00	2.88	Average
2	4874.000	32.97	8.63	35.70	50.46	56.36	74.00	17.64	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

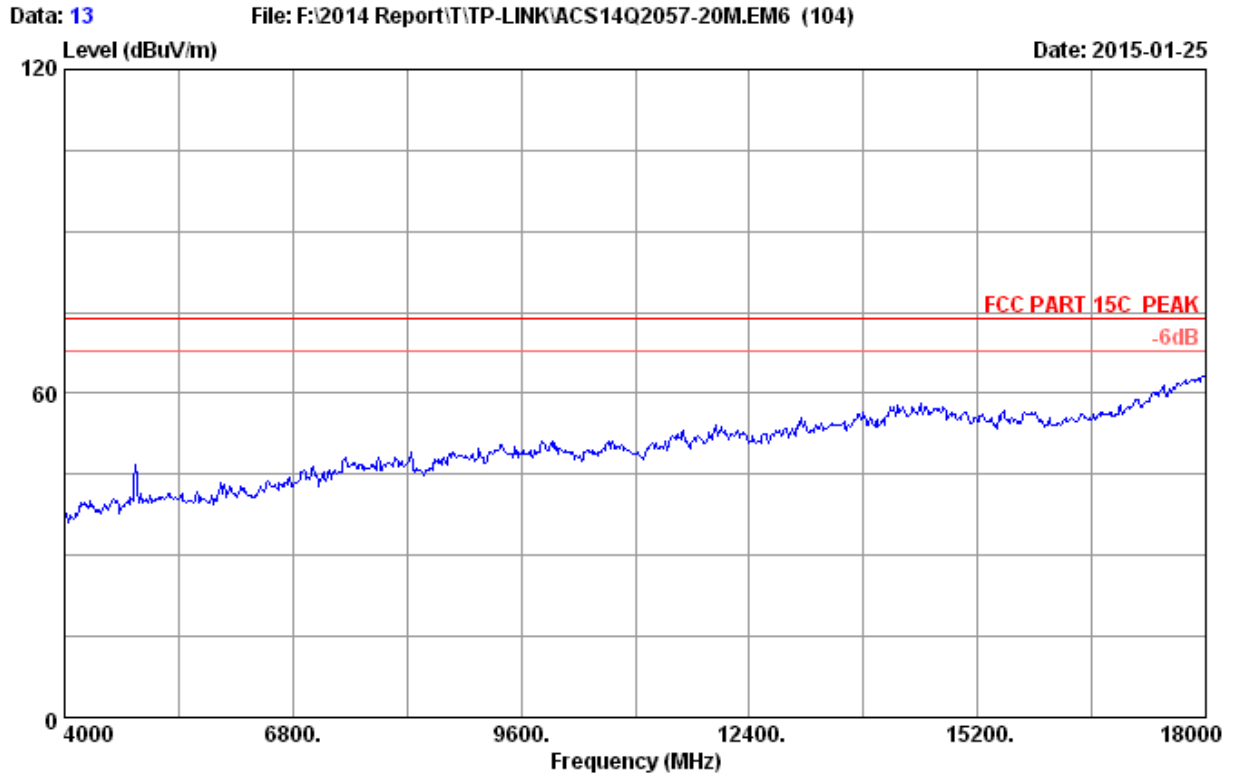


Site no. : 3m Chamber Data no. : 13
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11b 2437MHz Tx
M/N : CPE210

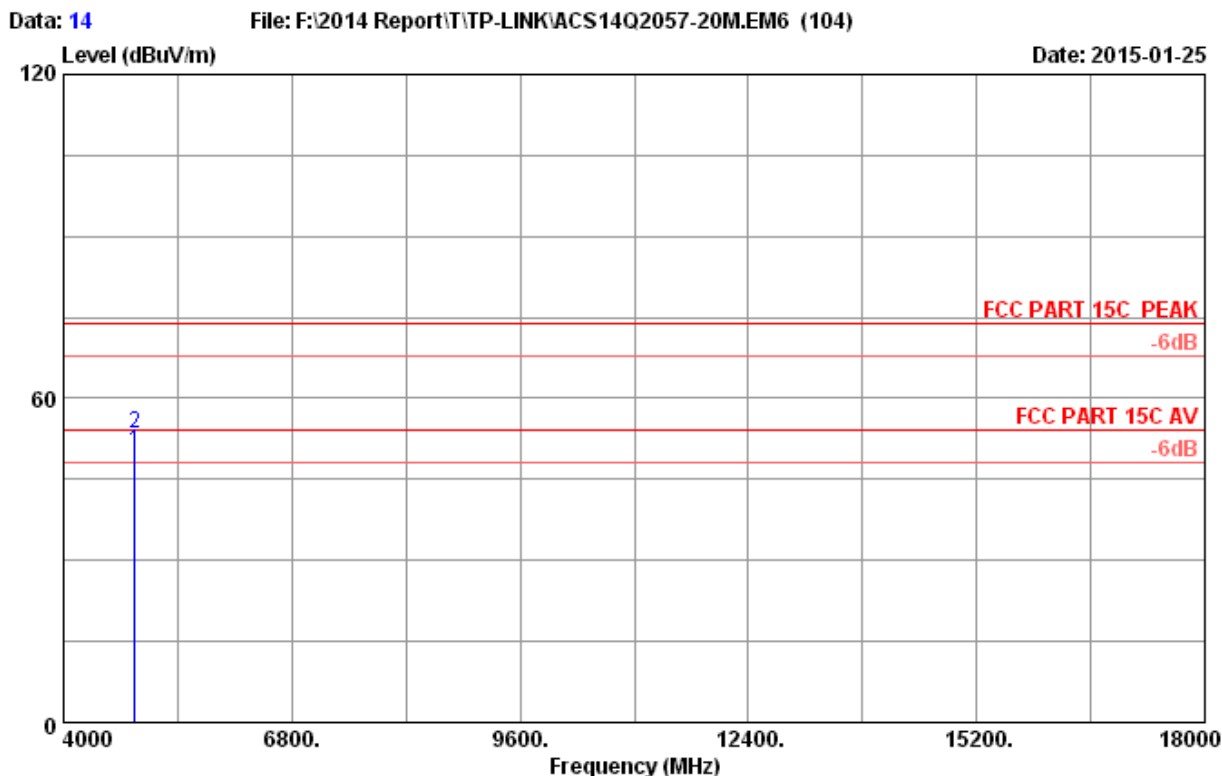

Site no. : 3m Chamber Data no. : 14
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2437MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	32.97	8.63	35.70	44.29	50.19	54.00	3.81	Average
2	4874.000	32.97	8.63	35.70	47.70	53.60	74.00	20.40	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

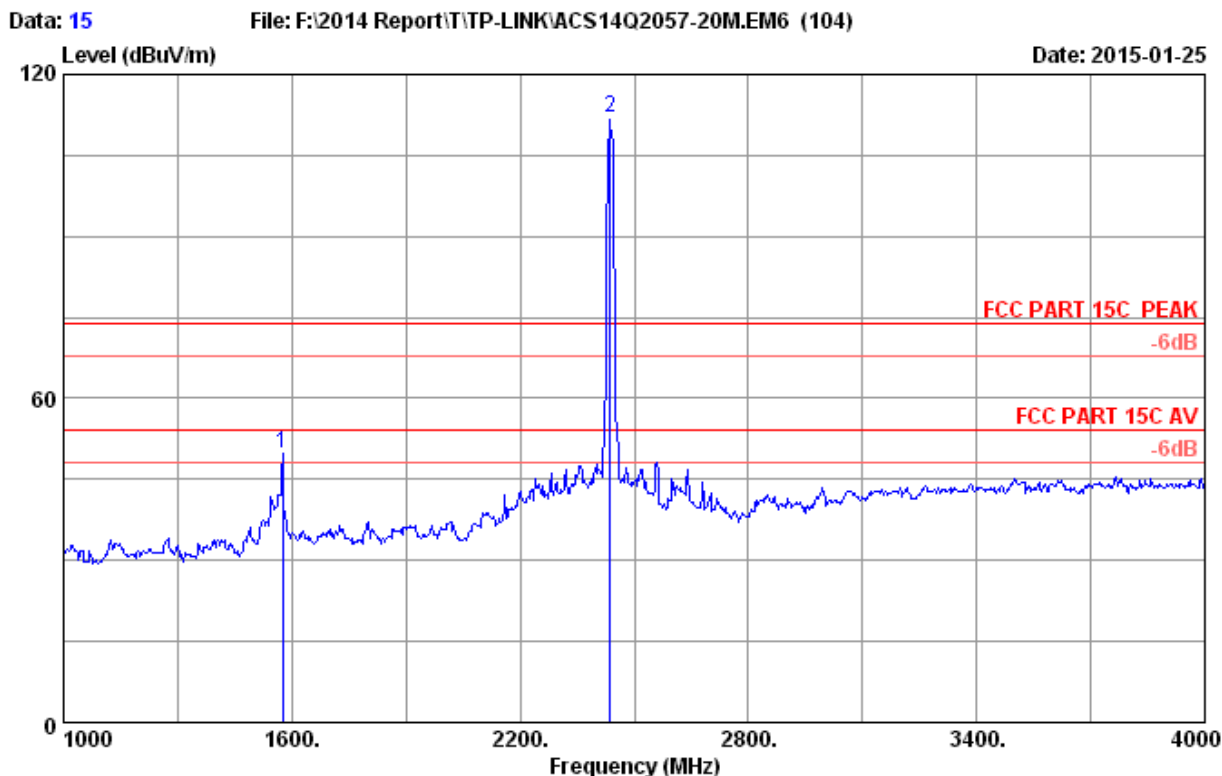

Site no. : 3m Chamber Data no. : 15
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2437MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	55.84	49.79	74.00	24.21	Peak
2	2437.000	28.26	5.85	35.70	113.61	112.02	74.00	-38.02	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

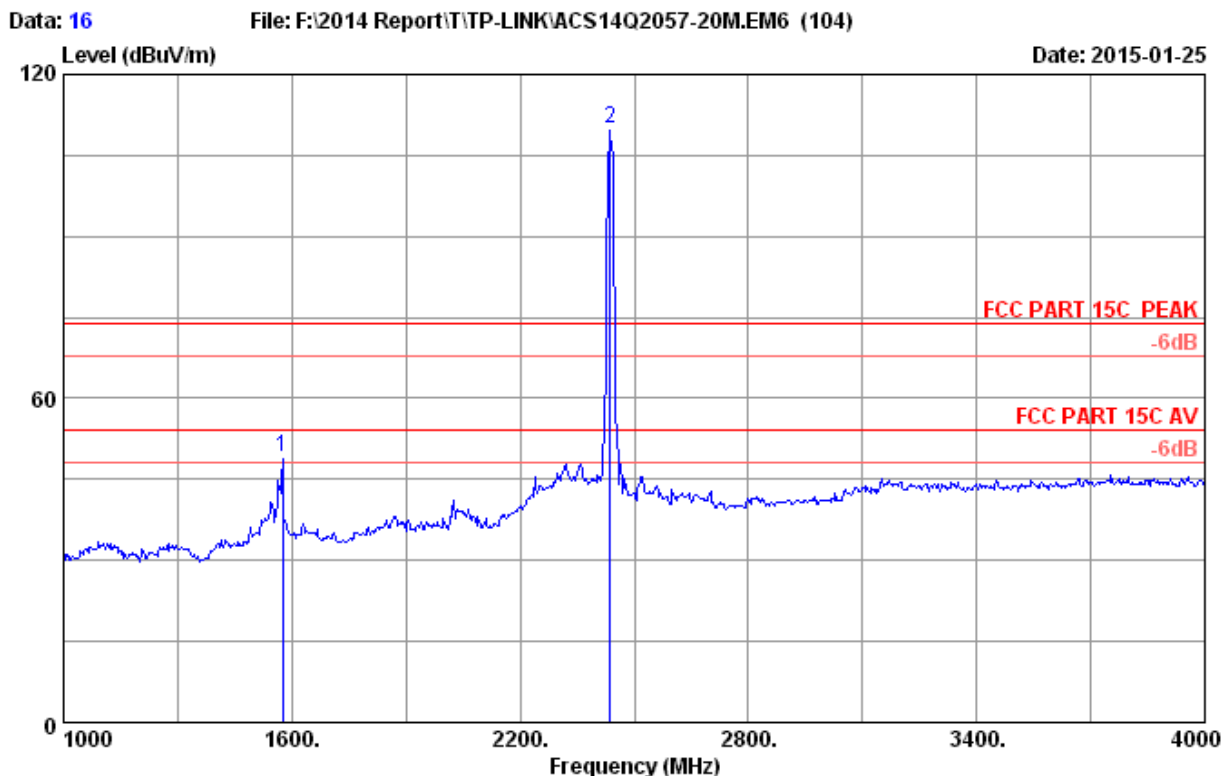


```

Site no.      : 3m Chamber                      Data no.   : 16
Dis. / Ant.   : 3m 2014 3115 (4580)           Ant. pol.  : VERTICAL
Limit        : FCC PART 15C PEAK
Env. / Ins.   : 23*C/54%
Engineer     : Alice_Yang
EUT          : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating  : DC 24V From POE Input AC 120V/60Hz
Test Mode    : IEEE802.11b 2437MHz Tx
M/N          : CPE210
    
```

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	55.19	49.14	74.00	24.86	Peak
2	2437.000	28.26	5.85	35.70	111.68	110.09	74.00	-36.09	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

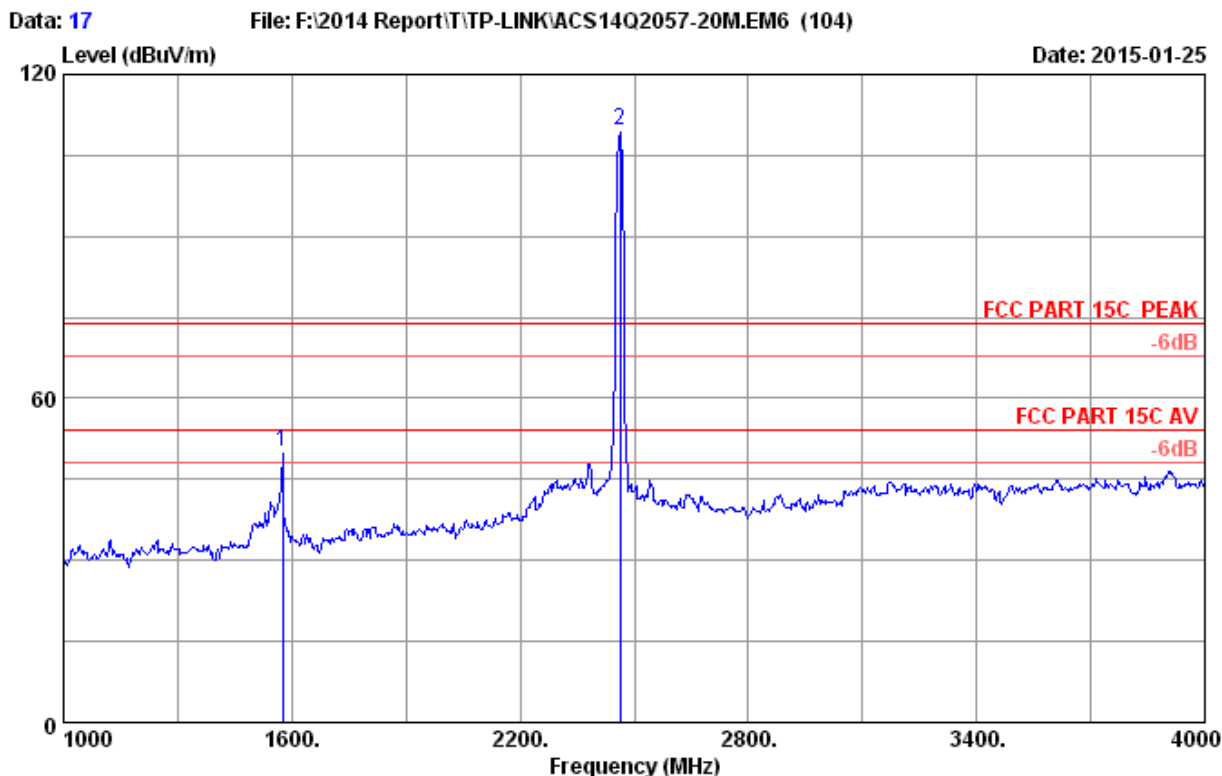

Site no. : 3m Chamber Data no. : 17
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	56.33	50.28	74.00	23.72	Peak
2	2462.000	28.32	5.89	35.70	111.19	109.70	74.00	-35.70	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

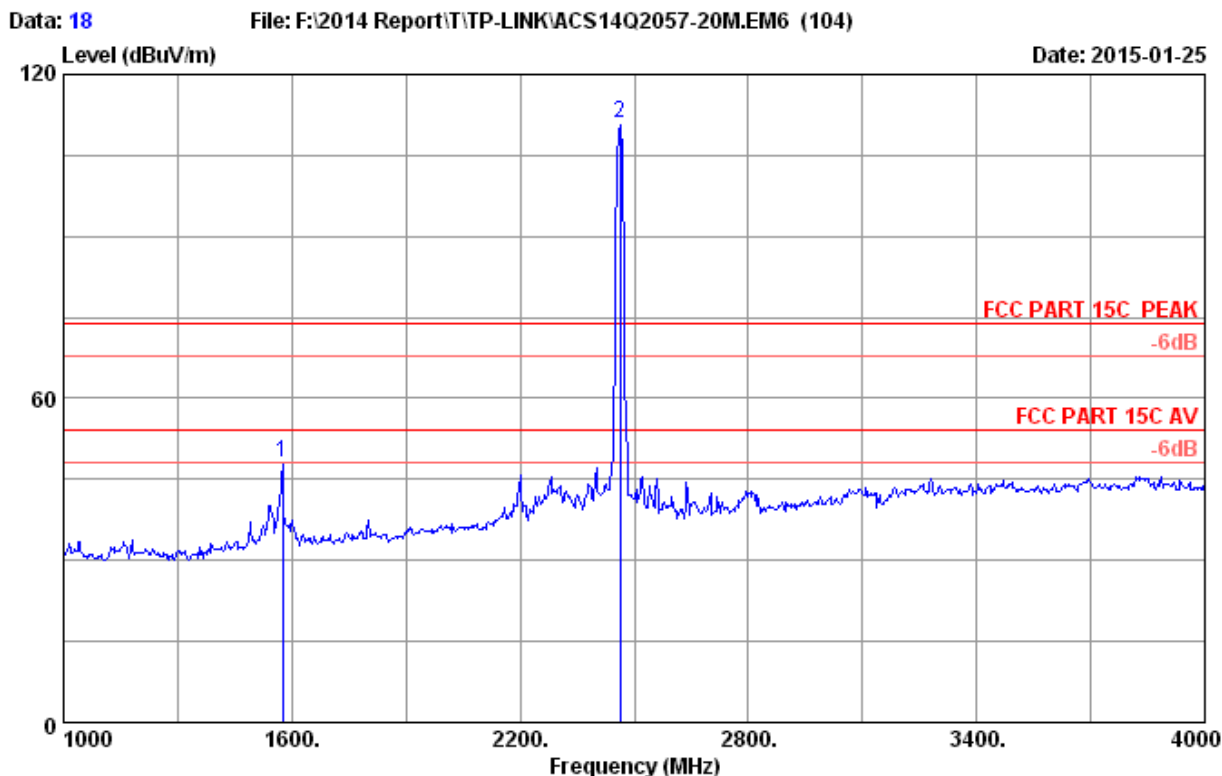


Site no. : 3m Chamber Data no. : 18
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	54.15	48.10	74.00	25.90	Peak
2	2462.000	28.32	5.89	35.70	112.33	110.84	74.00	-36.84	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

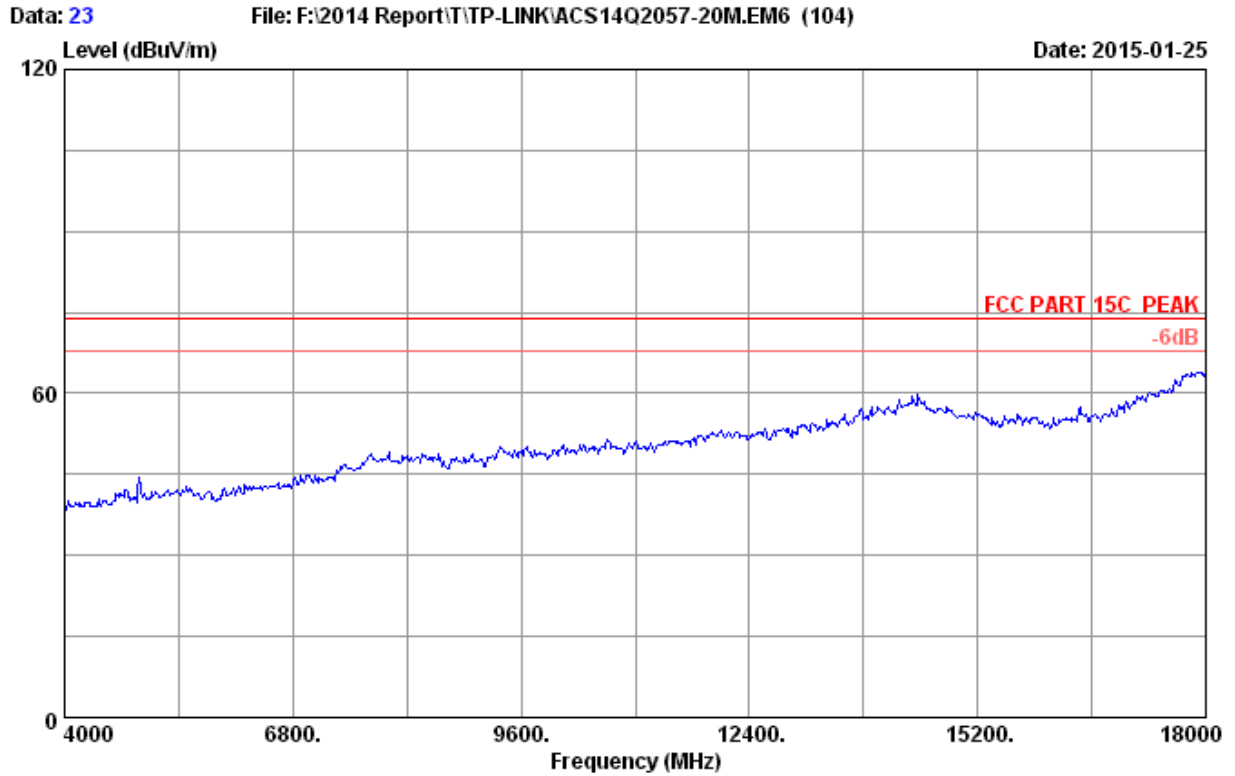


Site no. : 3m Chamber Data no. : 23
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11b 2462MHz Tx
M/N : CPE210

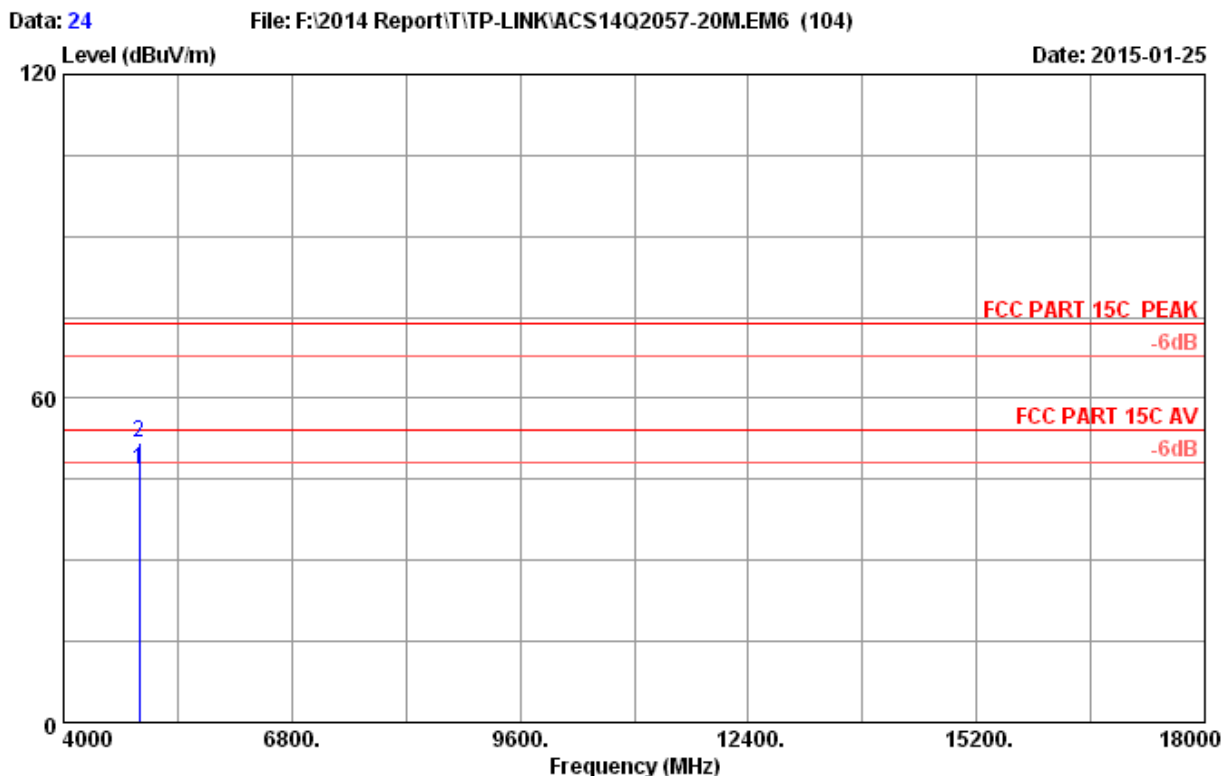


Site no. : 3m Chamber Data no. : 24
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.000	33.06	8.69	35.70	40.75	46.80	54.00	7.20	Average
2	4924.000	33.06	8.69	35.70	45.81	51.86	74.00	22.14	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

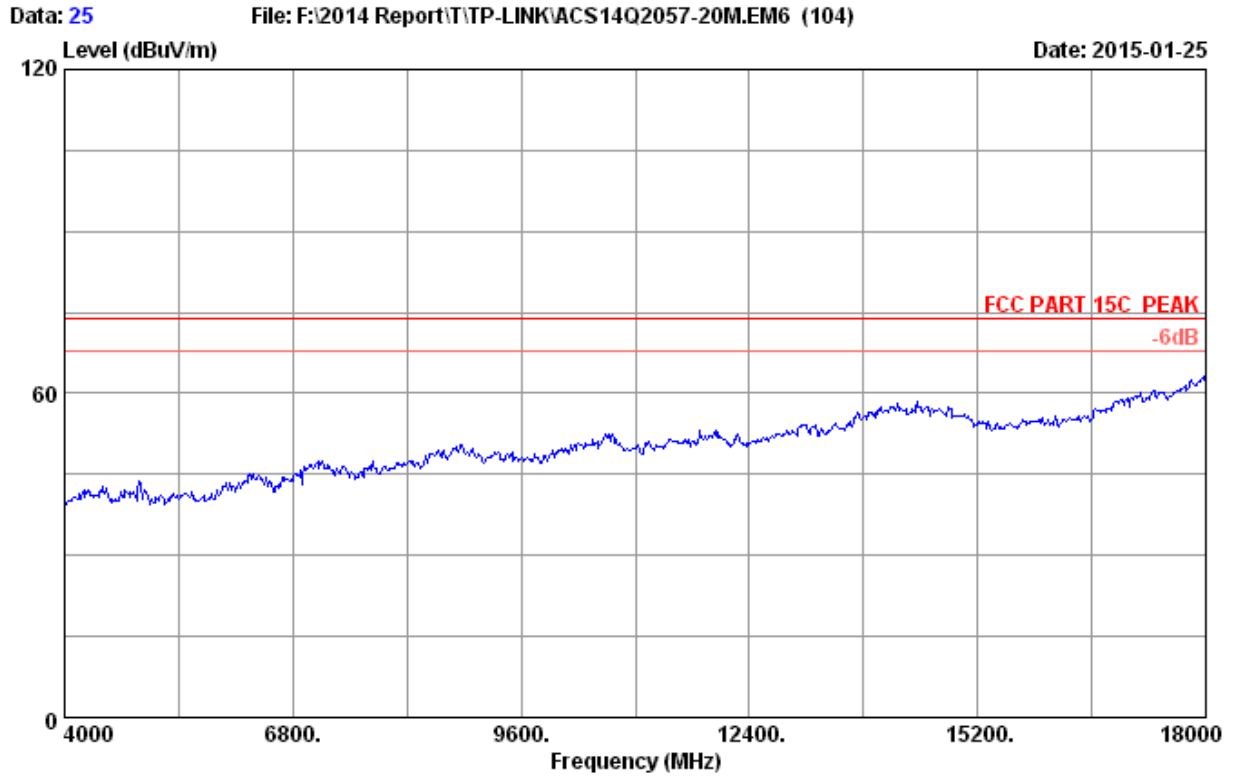

Site no. : 3m Chamber Data no. : 25
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11b 2462MHz Tx
M/N : CPE210

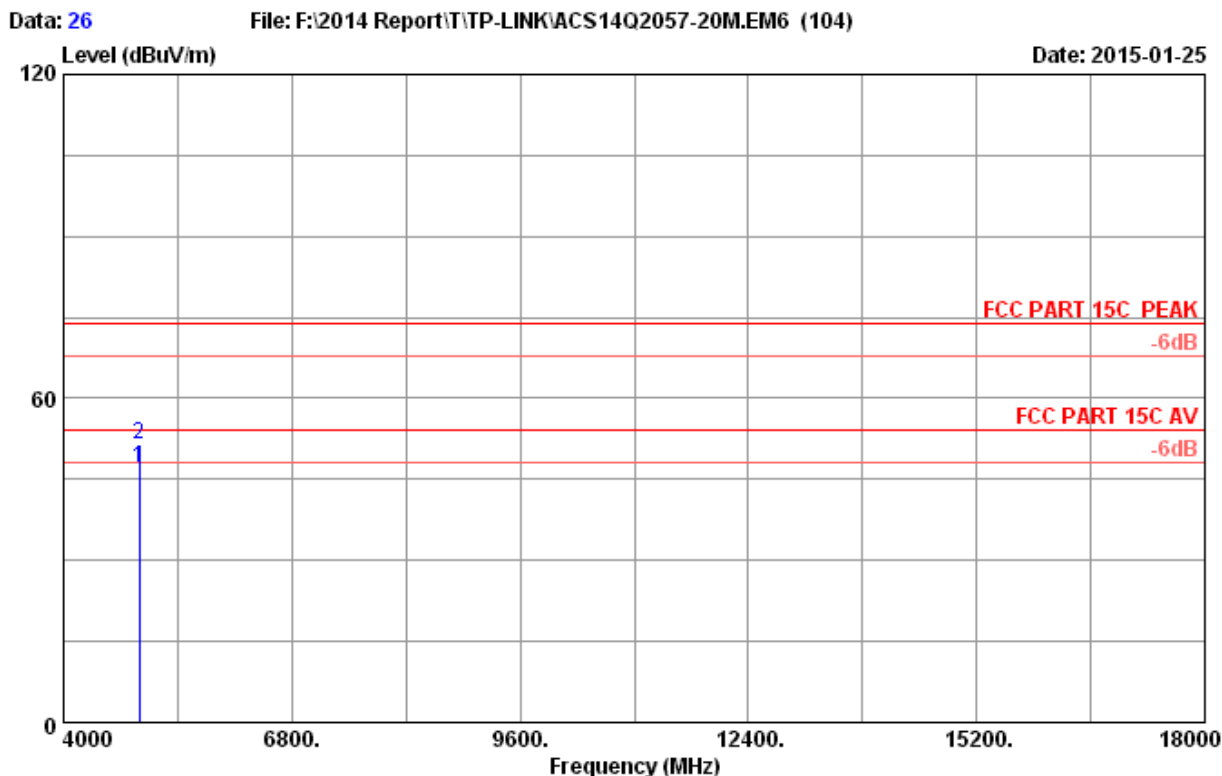


```


Site no.      : 3m Chamber                      Data no.   : 26
Dis. / Ant.   : 3m 2014 3115 (4580)           Ant. pol.  : HORIZONTAL
Limit        : FCC PART 15C PEAK
Env. / Ins.   : 23*C/54%
Engineer     : Alice_Yang
EUT          : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating  : DC 24V From POE Input AC 120V/60Hz
Test Mode    : IEEE802.11b 2462MHz Tx
M/N          : CPE210
    
```

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.000	33.06	8.69	35.70	41.02	47.07	54.00	6.93	Average
2	4924.000	33.06	8.69	35.70	45.38	51.43	74.00	22.57	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

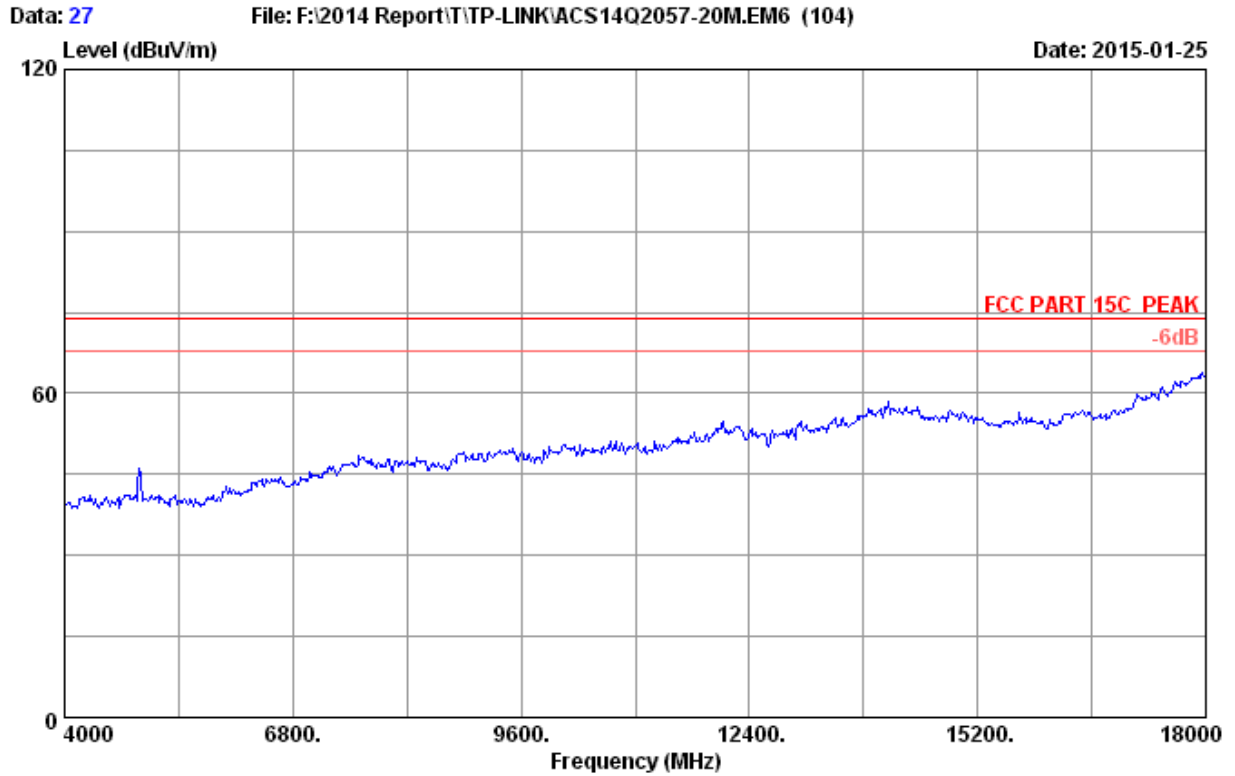


Site no. : 3m Chamber Data no. : 27
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11g 2462MHz Tx
M/N : CPE210

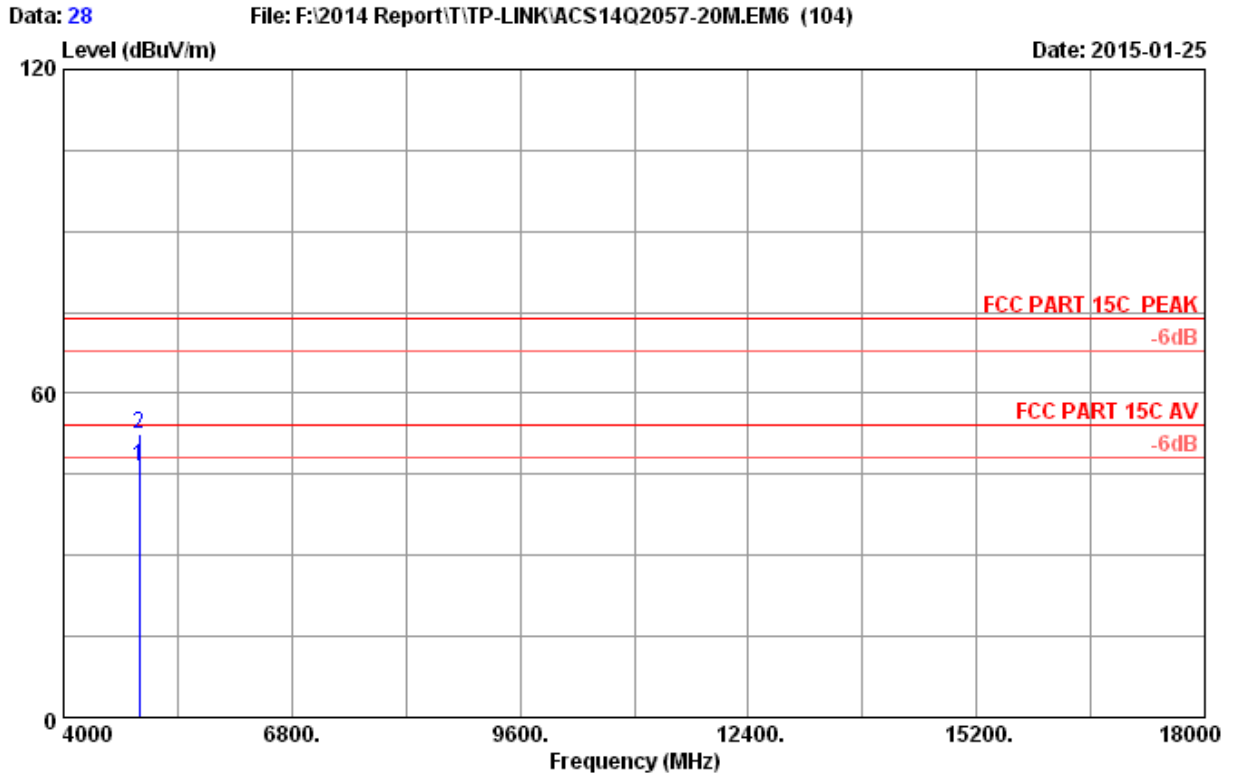


Site no. : 3m Chamber Data no. : 28
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.000	33.06	8.69	35.70	40.51	46.56	54.00	7.44	Average
2	4924.000	33.06	8.69	35.70	46.34	52.39	74.00	21.61	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

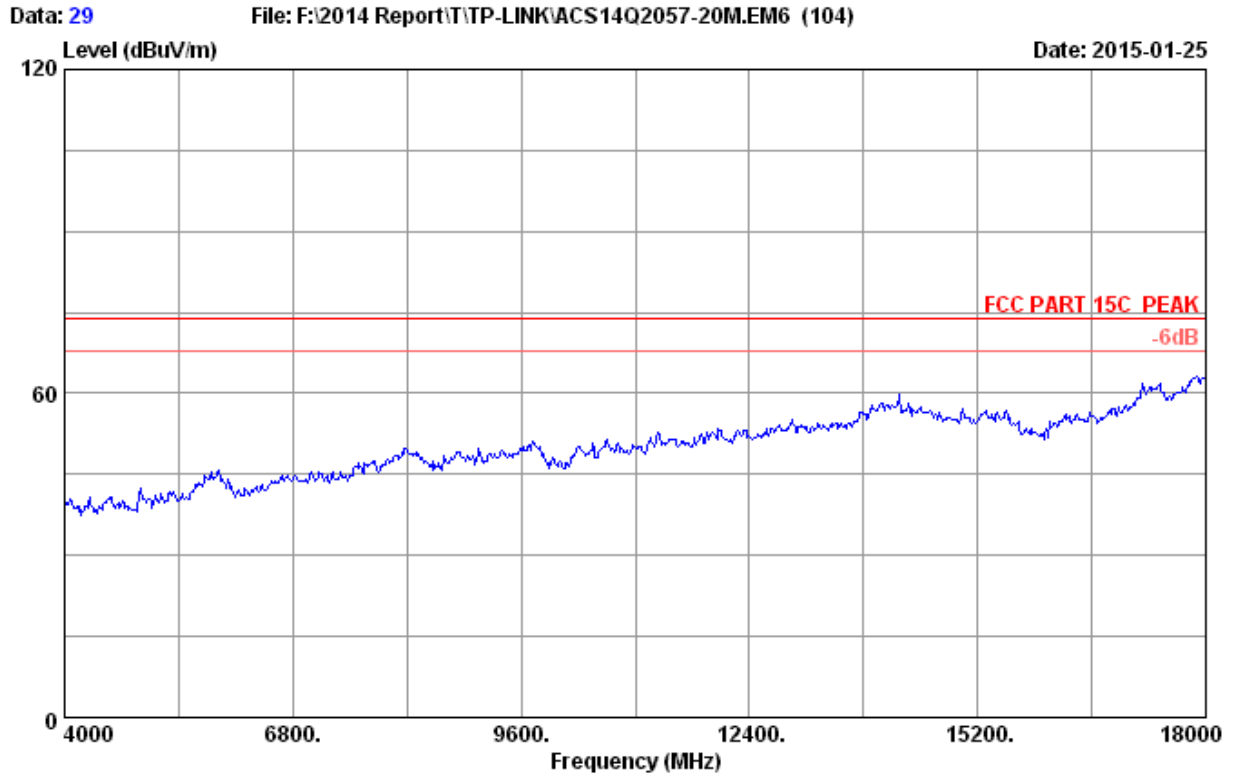


Site no. : 3m Chamber Data no. : 29
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11g 2462MHz Tx
M/N : CPE210

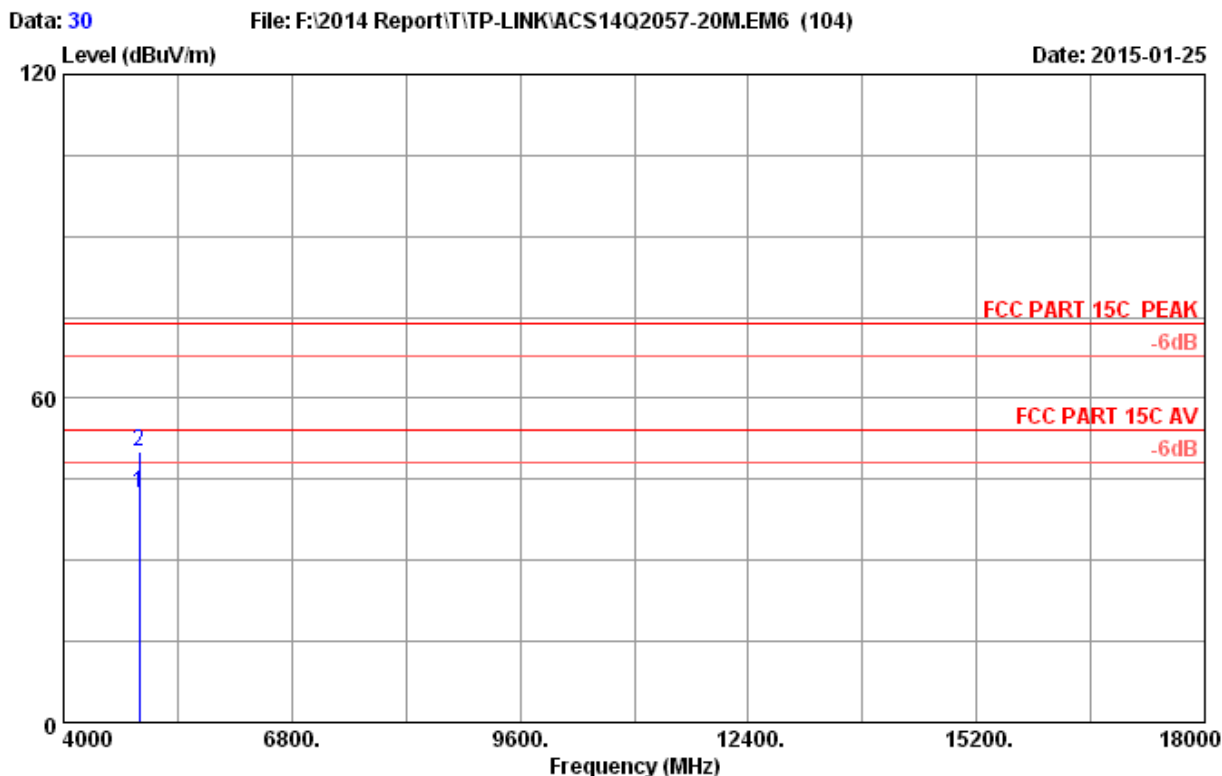

Site no. : 3m Chamber Data no. : 30
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.000	33.06	8.69	35.70	36.27	42.32	54.00	11.68	Average
2	4924.000	33.06	8.69	35.70	44.15	50.20	74.00	23.80	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

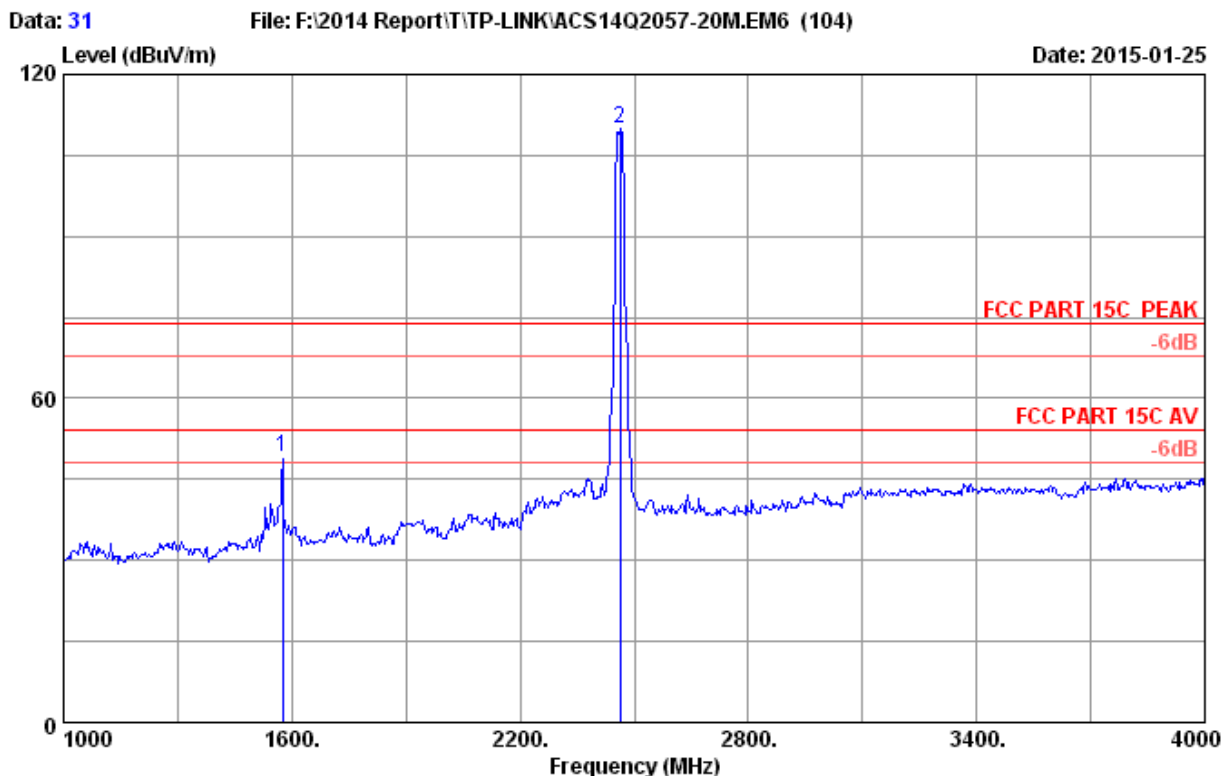


```

Site no.      : 3m Chamber                      Data no.   : 31
Dis. / Ant.  : 3m 2014 3115 (4580)             Ant. pol.  : VERTICAL
Limit        : FCC PART 15C PEAK
Env. / Ins.  : 23*C/54%
Engineer     : Alice_Yang
EUT          : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode    : IEEE802.11g 2462MHz Tx
M/N          : CPE210
    
```

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	55.03	48.98	74.00	25.02	Peak
2	2462.000	28.32	5.89	35.70	111.44	109.95	74.00	-35.95	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

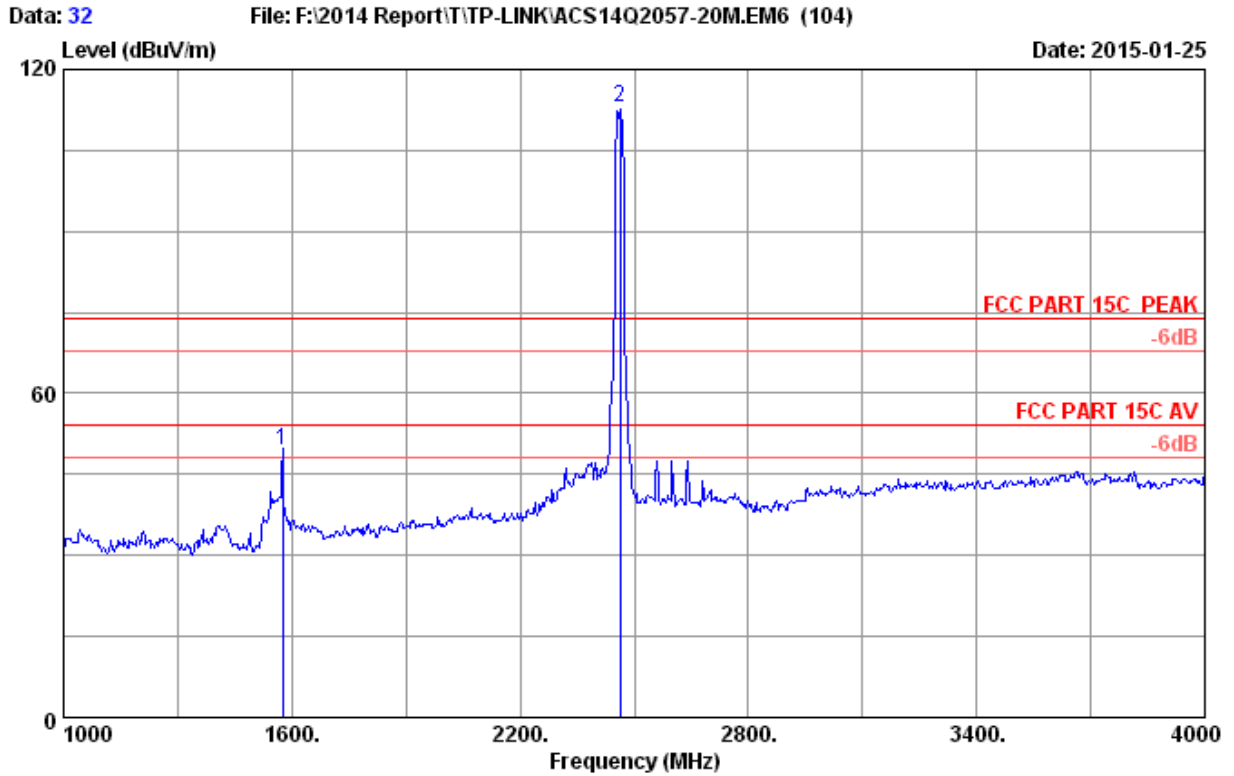

Site no. : 3m Chamber Data no. : 32
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	55.61	49.56	74.00	24.44	Peak
2	2462.000	28.32	5.89	35.70	114.37	112.88	74.00	-38.88	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

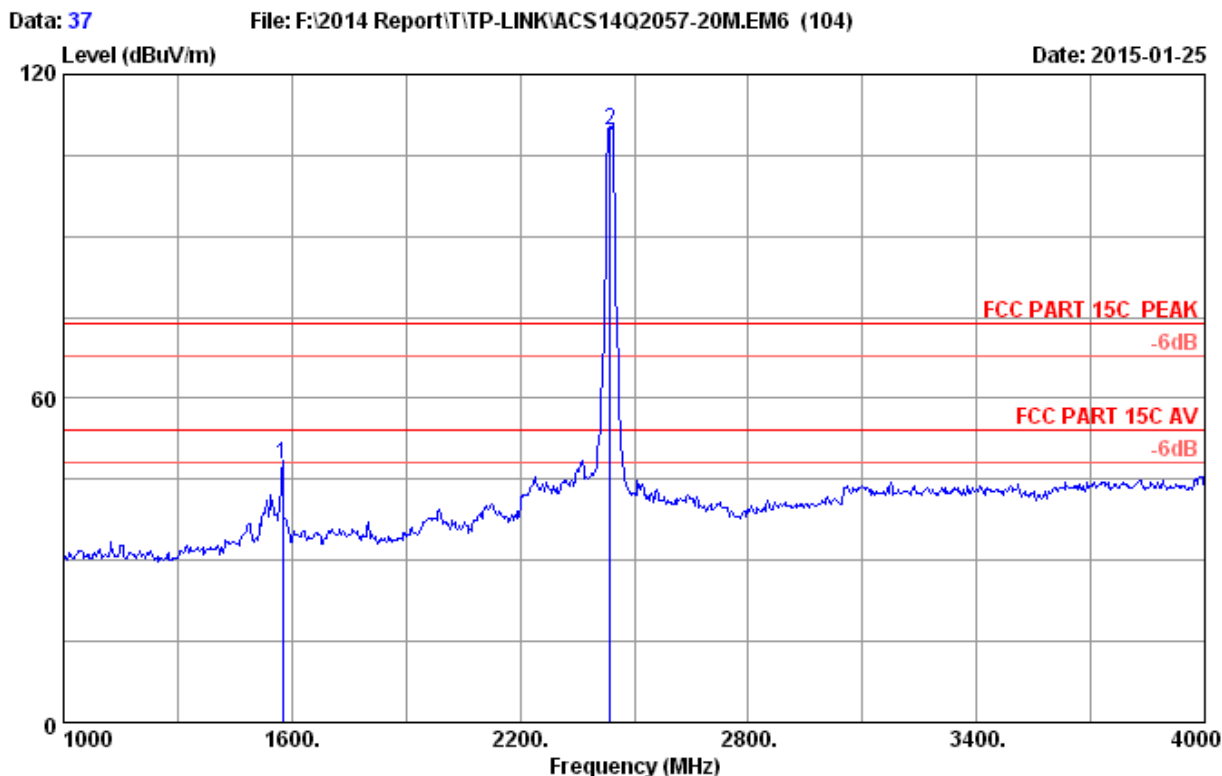

Site no. : 3m Chamber Data no. : 37
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	53.84	47.79	74.00	26.21	Peak
2	2437.000	28.26	5.85	35.70	111.34	109.75	74.00	-35.75	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

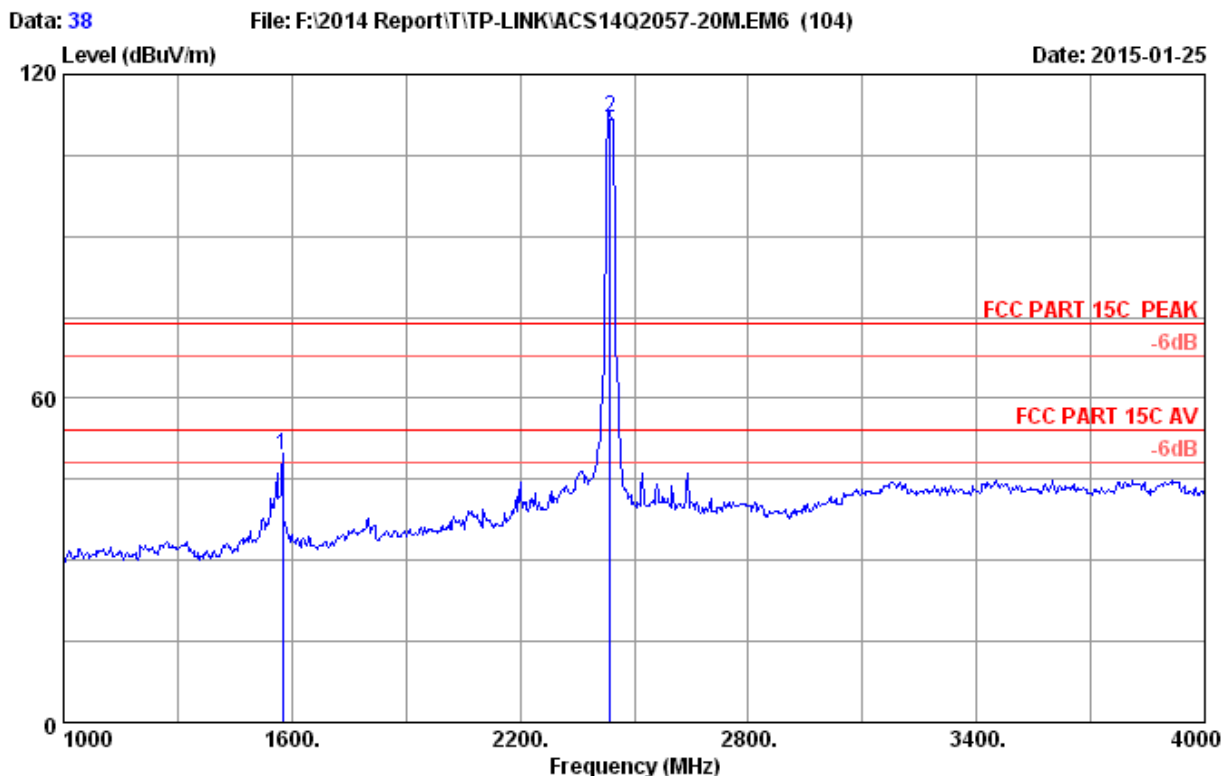


Site no. : 3m Chamber Data no. : 38
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	55.37	49.32	74.00	24.68	Peak
2	2437.000	28.26	5.85	35.70	113.72	112.13	74.00	-38.13	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

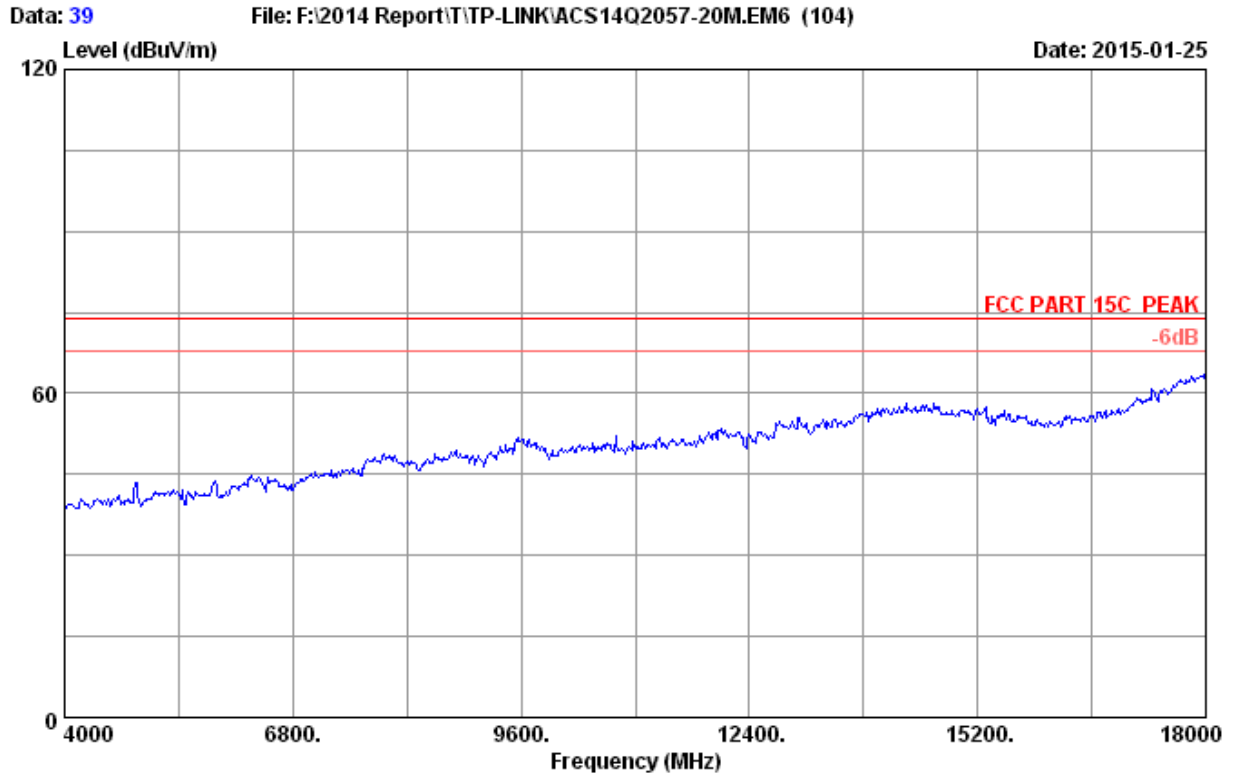


Site no. : 3m Chamber Data no. : 39
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11g 2462MHz Tx
M/N : CPE210

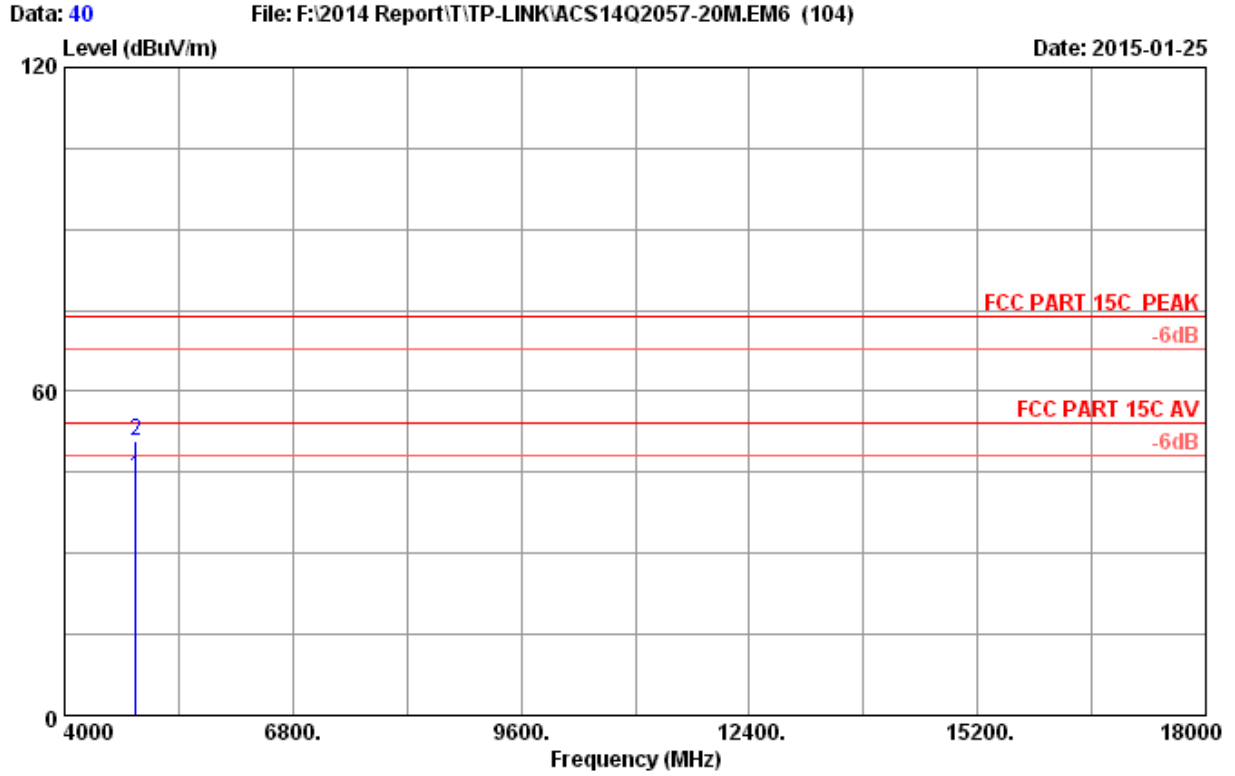


Site no. : 3m Chamber Data no. : 40
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	32.97	8.63	35.70	38.29	44.19	54.00	9.81	Average
2	4874.000	32.97	8.63	35.70	45.02	50.92	74.00	23.08	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

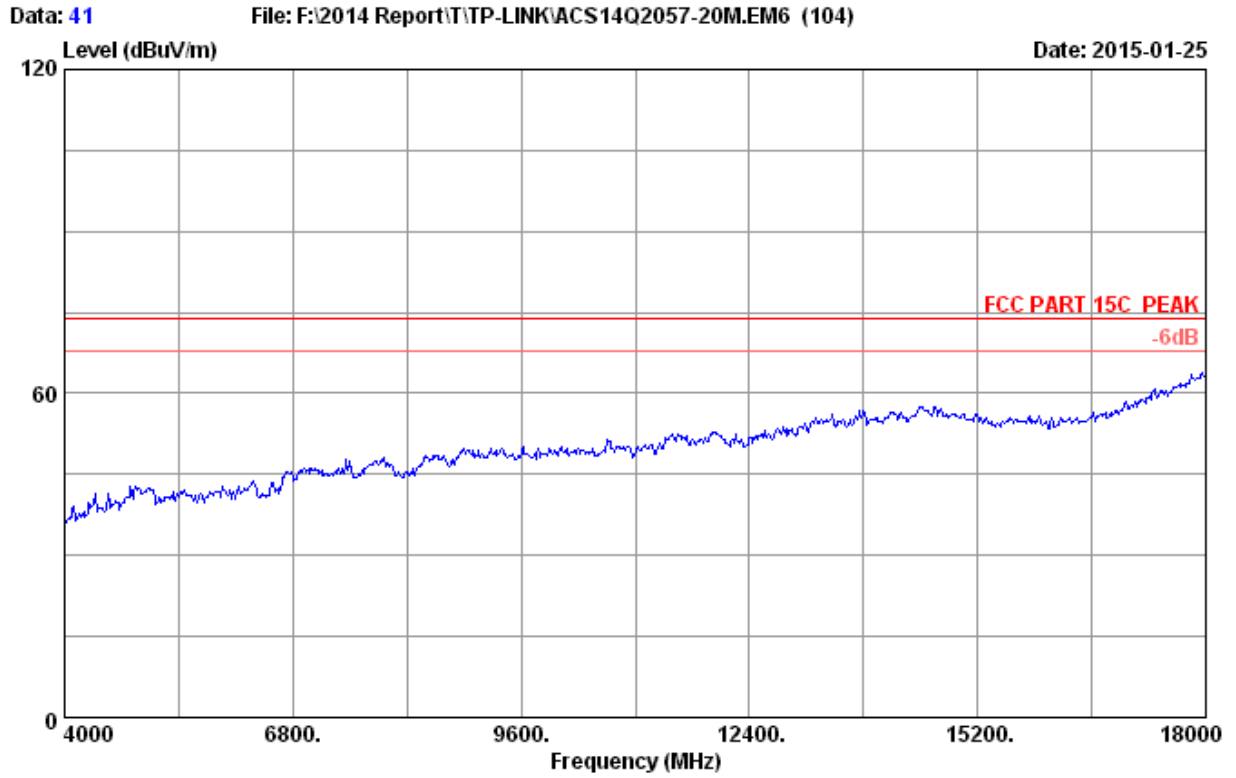


Site no. : 3m Chamber Data no. : 41
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11g 2462MHz Tx
M/N : CPE210

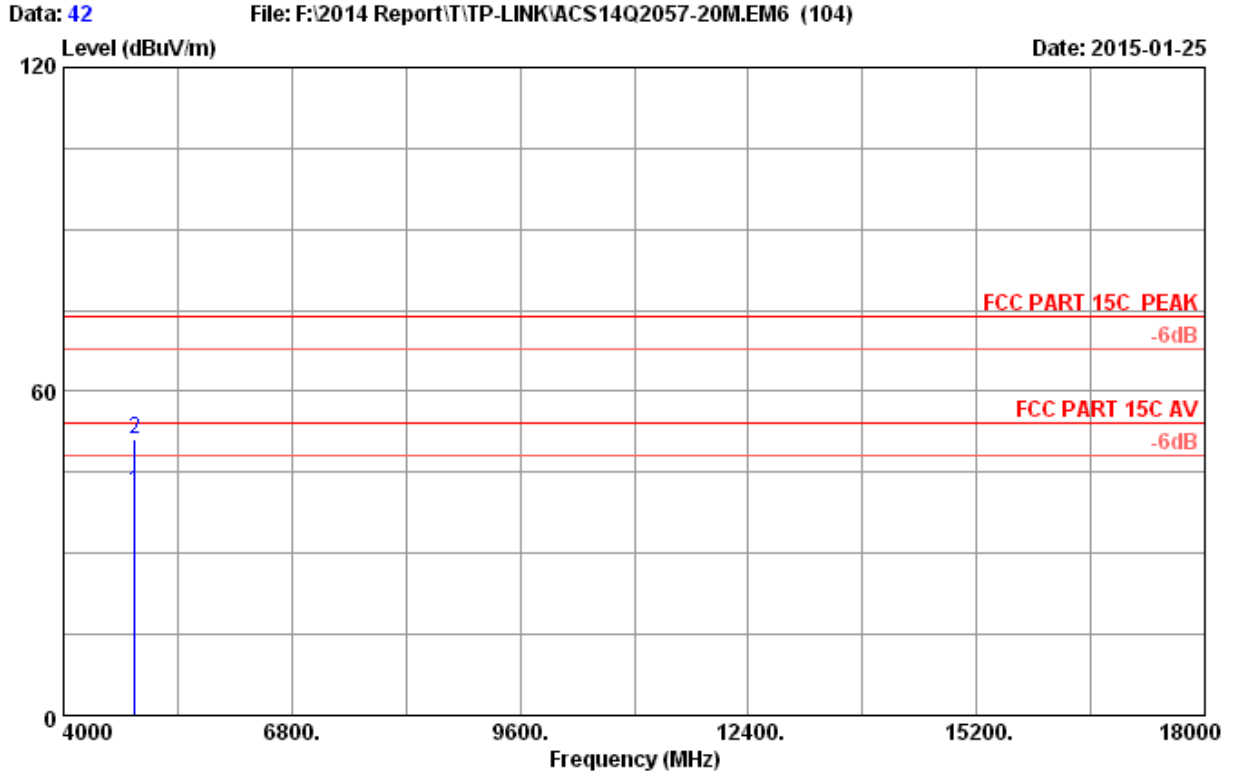


Site no. : 3m Chamber Data no. : 42
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	32.97	8.63	35.70	35.68	41.58	54.00	12.42	Average
2	4874.000	32.97	8.63	35.70	45.40	51.30	74.00	22.70	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

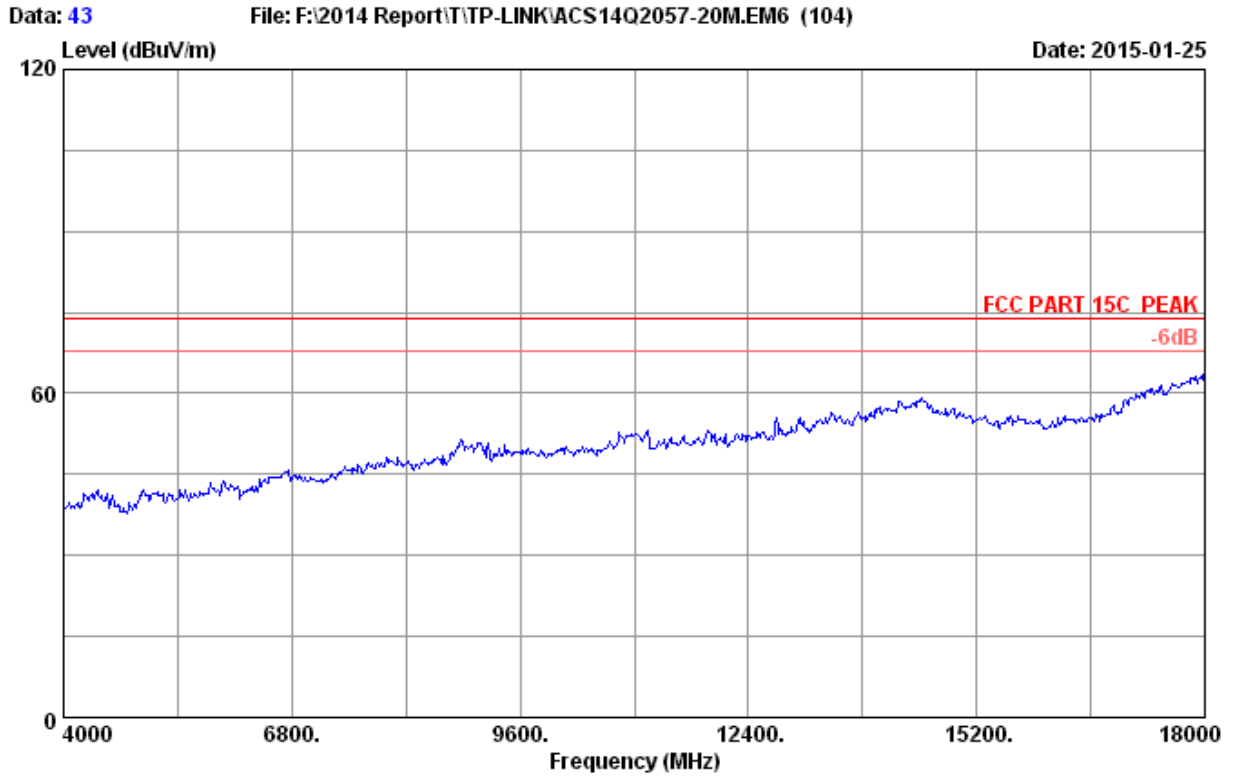


Site no. : 3m Chamber Data no. : 43
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11g 2412MHz Tx
M/N : CPE210

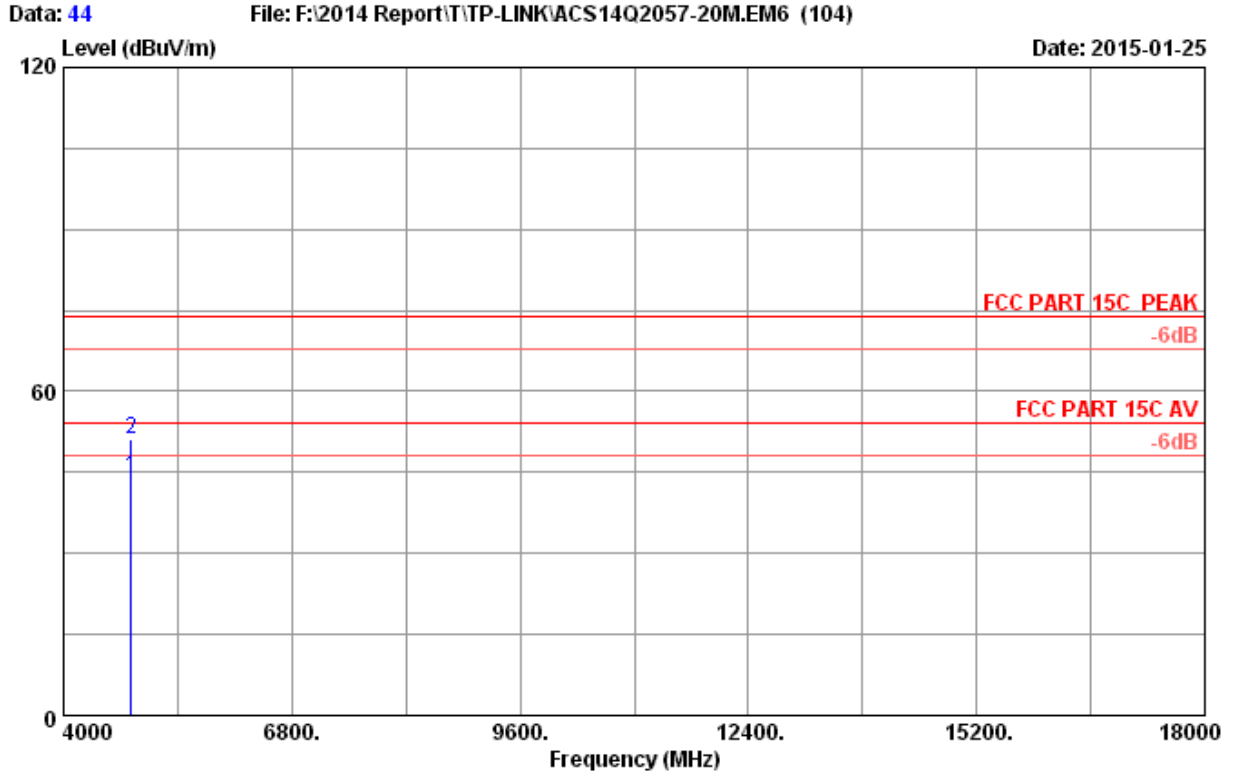


Site no. : 3m Chamber Data no. : 44
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	32.88	8.58	35.70	38.26	44.02	54.00	9.98	Average
2	4824.000	32.88	8.58	35.70	45.28	51.04	74.00	22.96	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

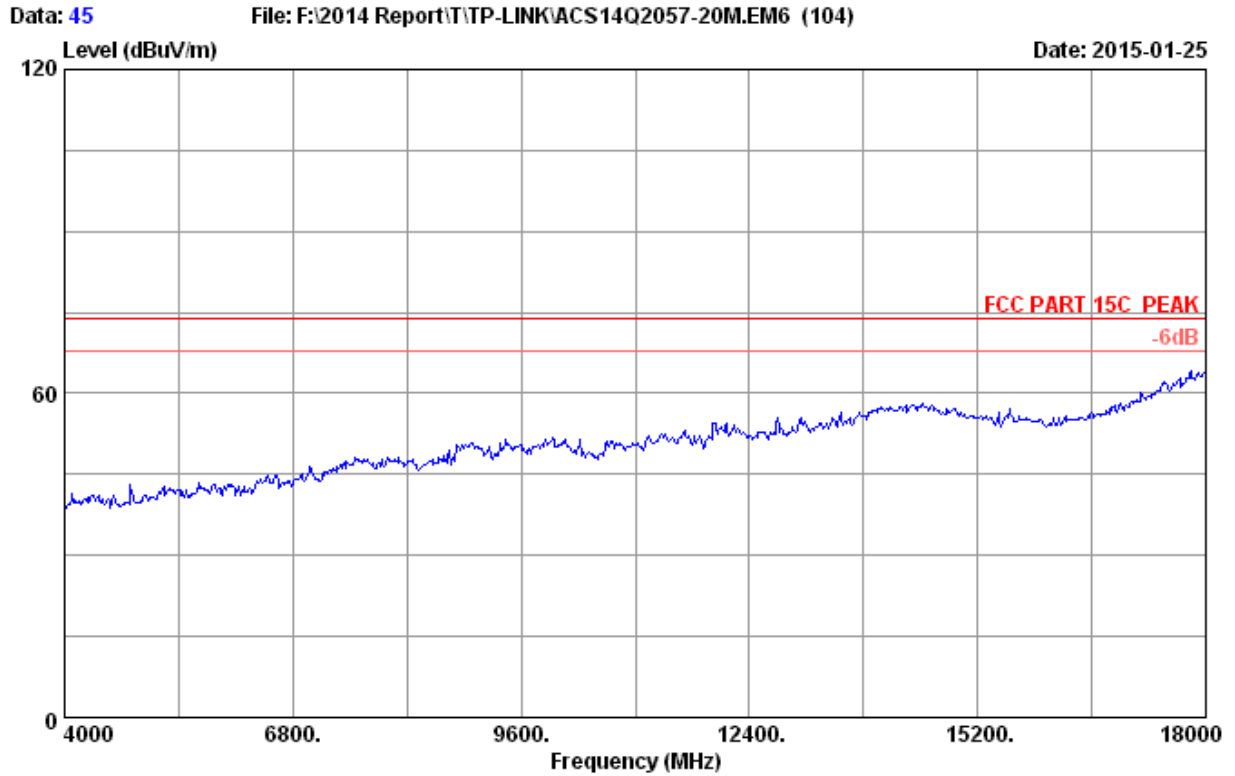


Site no. : 3m Chamber Data no. : 45
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11g 2412MHz Tx
M/N : CPE210

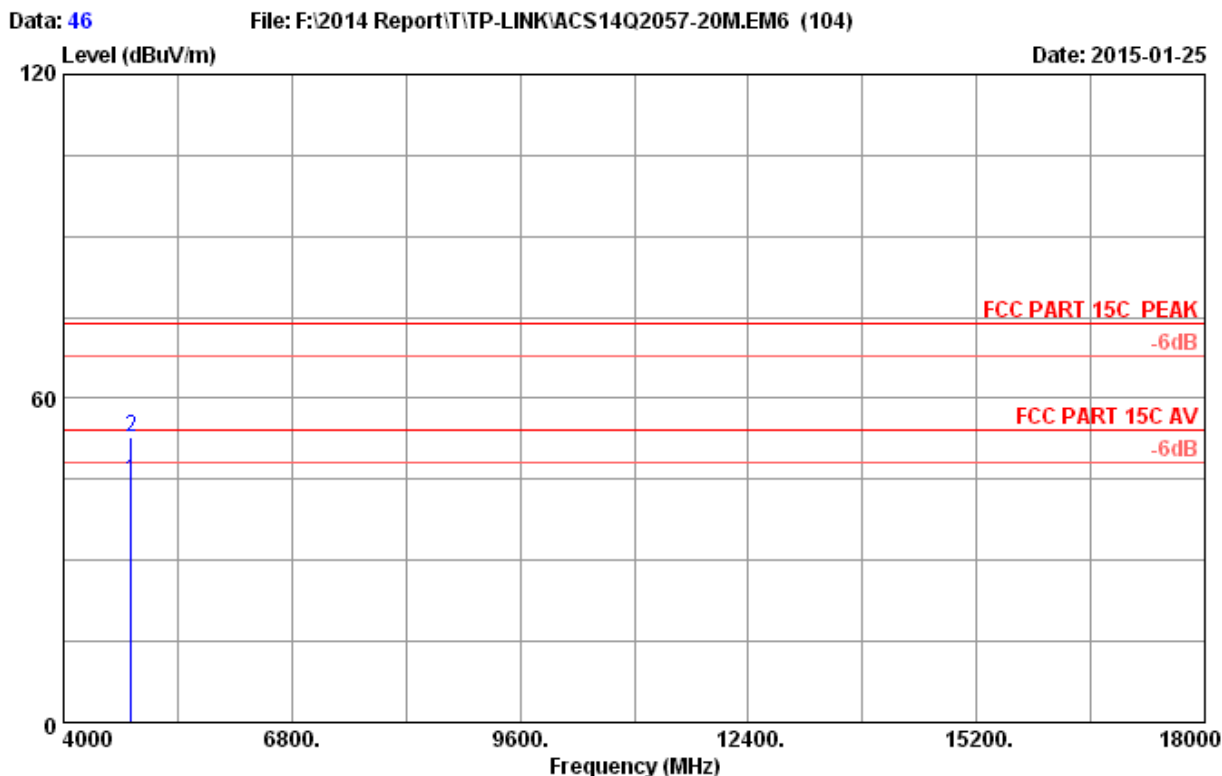

Site no. : 3m Chamber Data no. : 46
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	32.88	8.58	35.70	39.04	44.80	54.00	9.20	Average
2	4824.000	32.88	8.58	35.70	47.13	52.89	74.00	21.11	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

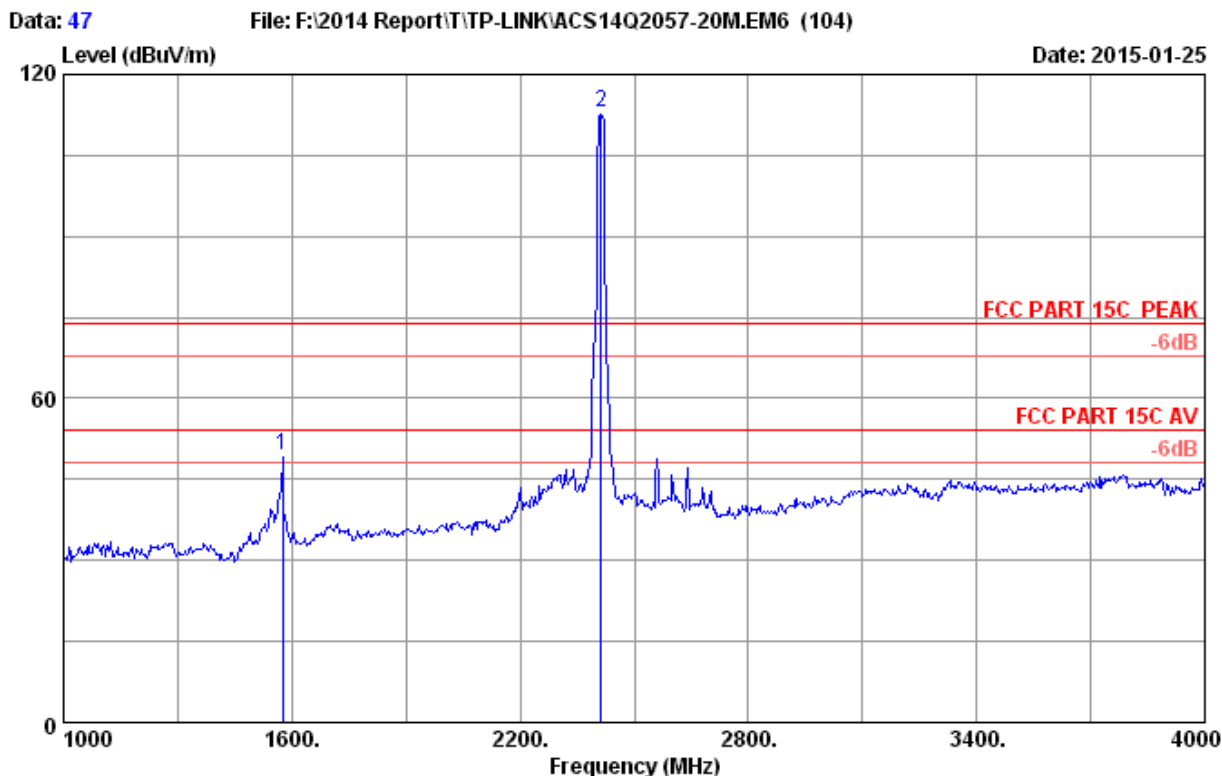

Site no. : 3m Chamber Data no. : 47
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	55.38	49.33	74.00	24.67	Peak
2	2412.000	28.21	5.81	35.70	114.55	112.87	74.00	-38.87	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

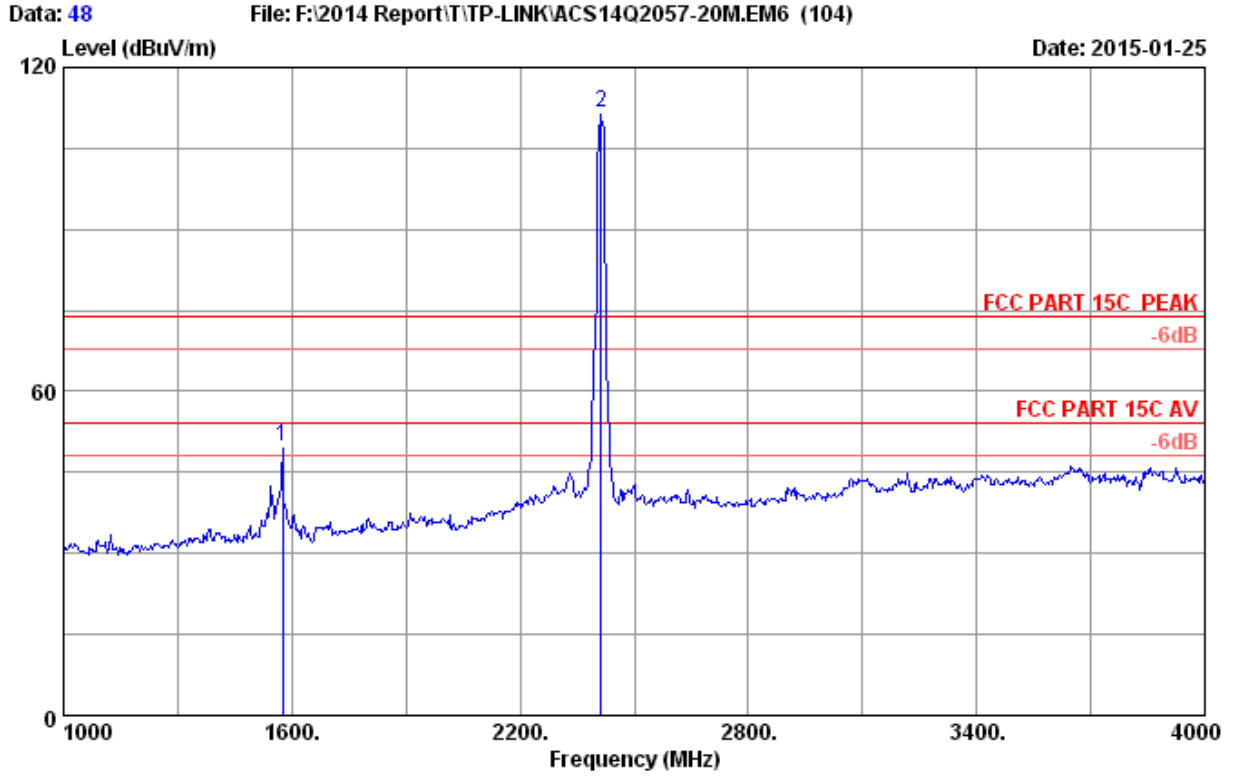


```

Site no.      : 3m Chamber                      Data no.   : 48
Dis. / Ant.  : 3m 2014 3115 (4580)           Ant. pol.  : VERTICAL
Limit        : FCC PART 15C PEAK
Env. / Ins.  : 23*C/54%
Engineer     : Alice_Yang
EUT          : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode    : IEEE802.11g 2412MHz Tx
M/N          : CPE210
    
```

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	55.72	49.67	74.00	24.33	Peak
2	2412.000	28.21	5.81	35.70	113.25	111.57	74.00	-37.57	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

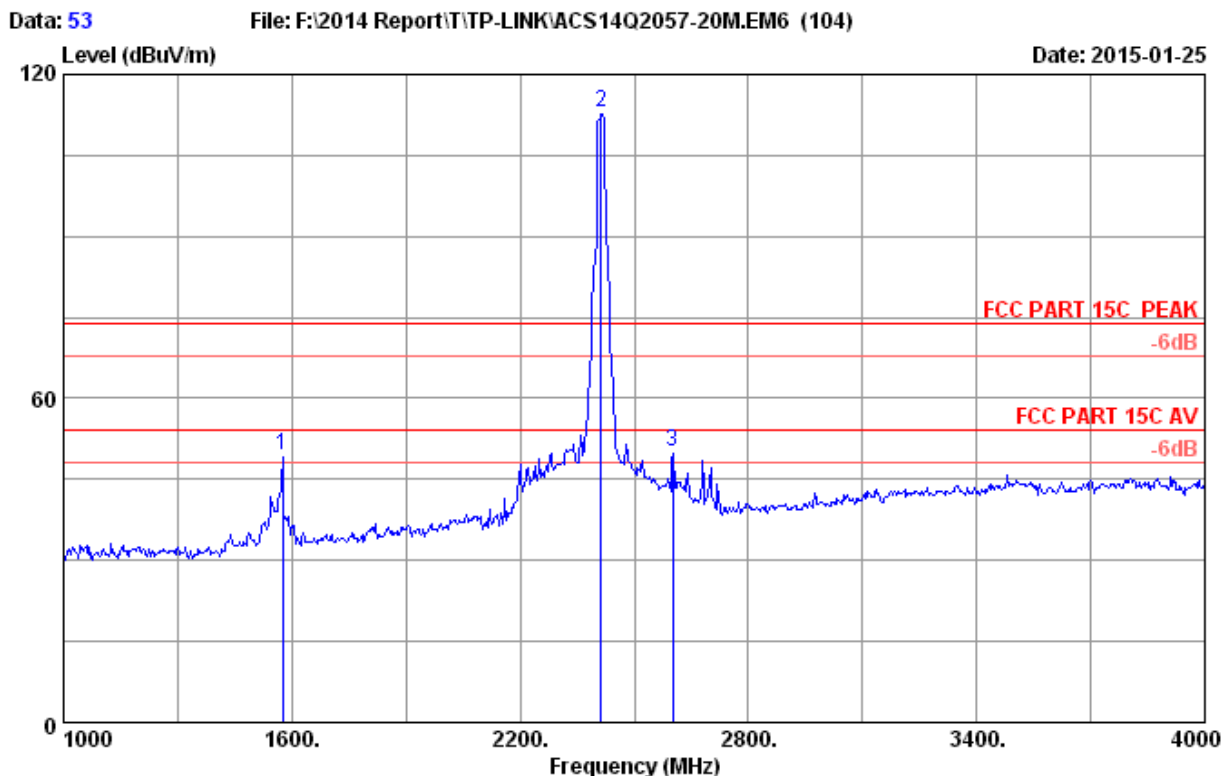

Site no. : 3m Chamber Data no. : 53
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	55.59	49.54	74.00	24.46	Peak
2	2412.000	28.21	5.81	35.70	114.63	112.95	74.00	-38.95	Peak
3	2602.000	28.81	6.09	35.70	51.03	50.23	74.00	23.77	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

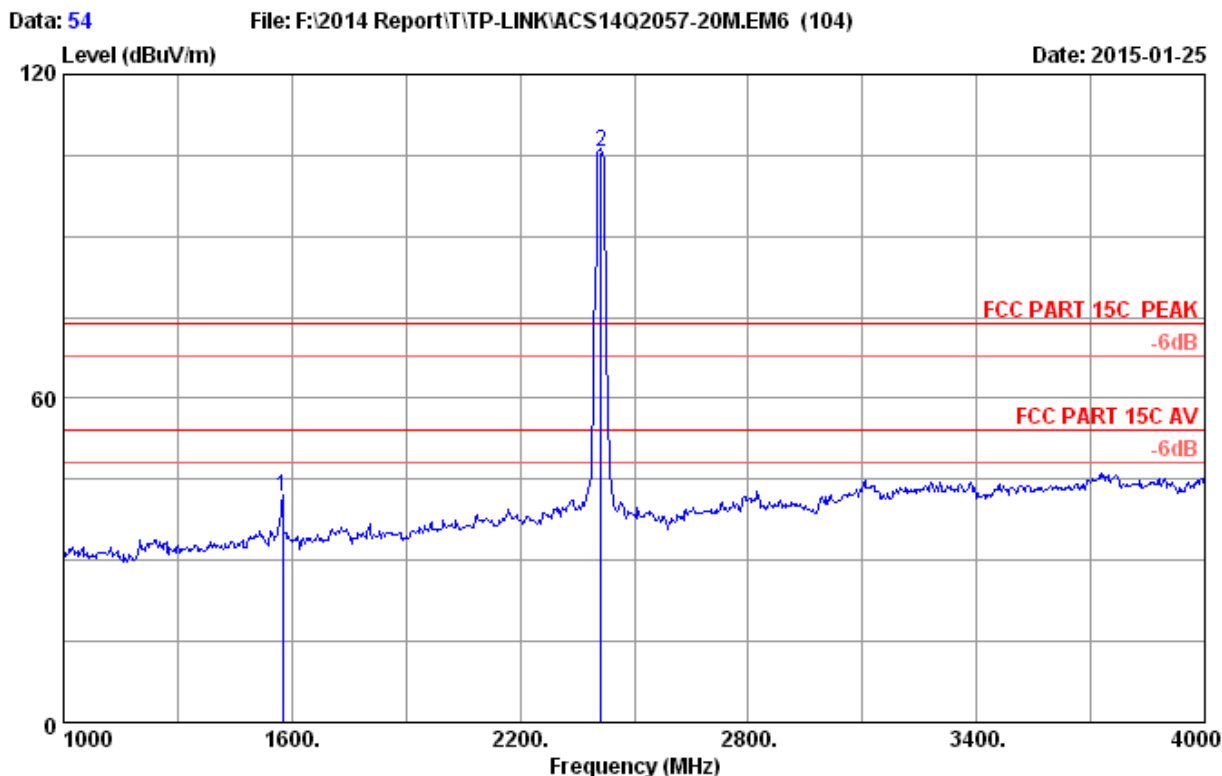


Site no. : 3m Chamber Data no. : 54
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	47.96	41.91	74.00	32.09	Peak
2	2412.000	28.21	5.81	35.70	107.36	105.68	74.00	-31.68	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

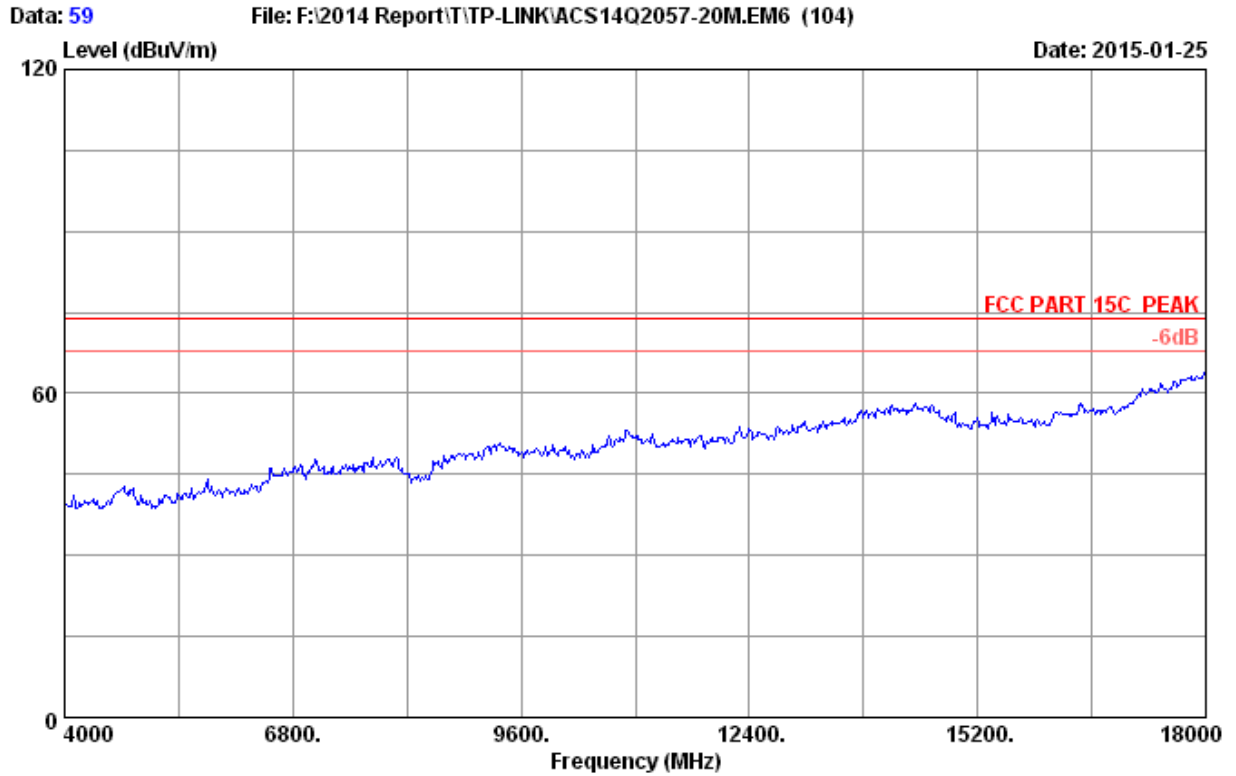


Site no. : 3m Chamber Data no. : 59
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11nHT20 2412MHz Tx
M/N : CPE210

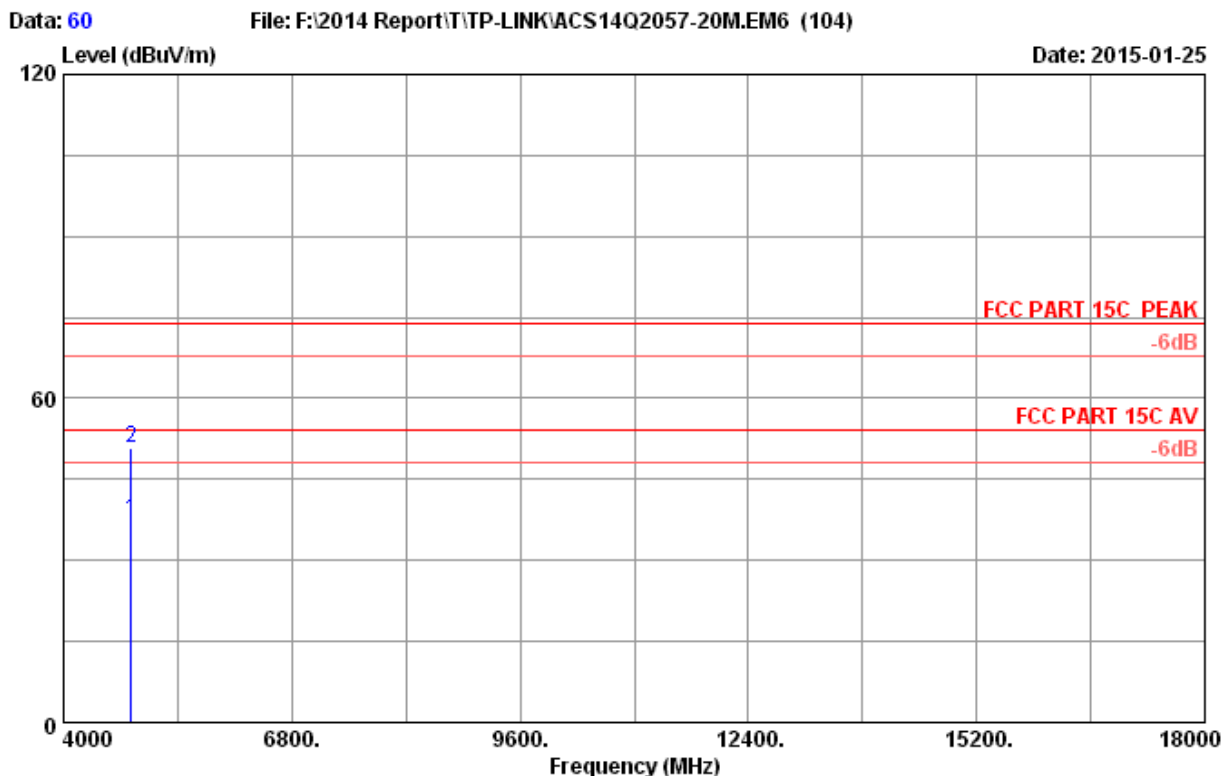


Site no. : 3m Chamber Data no. : 60
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	32.88	8.58	35.70	31.82	37.58	54.00	16.42	Average
2	4824.000	32.88	8.58	35.70	45.07	50.83	74.00	23.17	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

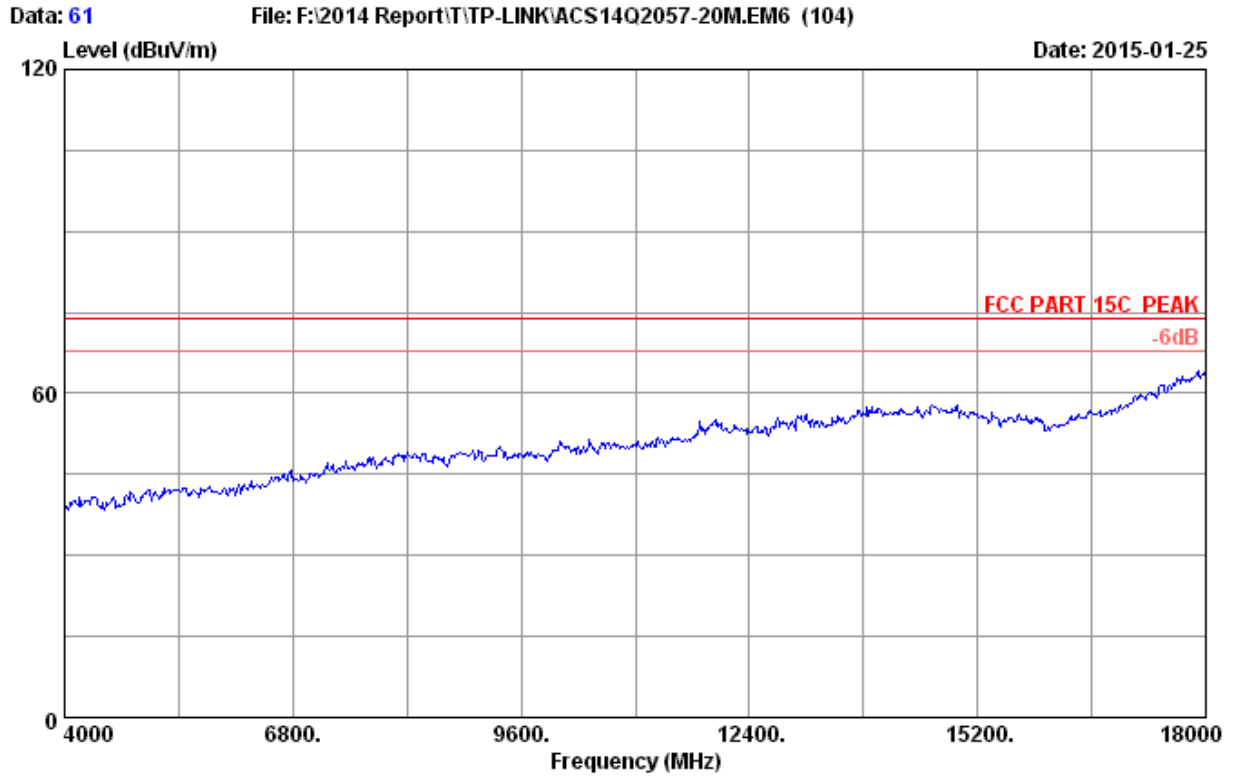


Site no. : 3m Chamber Data no. : 61
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11nHT20 2412MHz Tx
M/N : CPE210

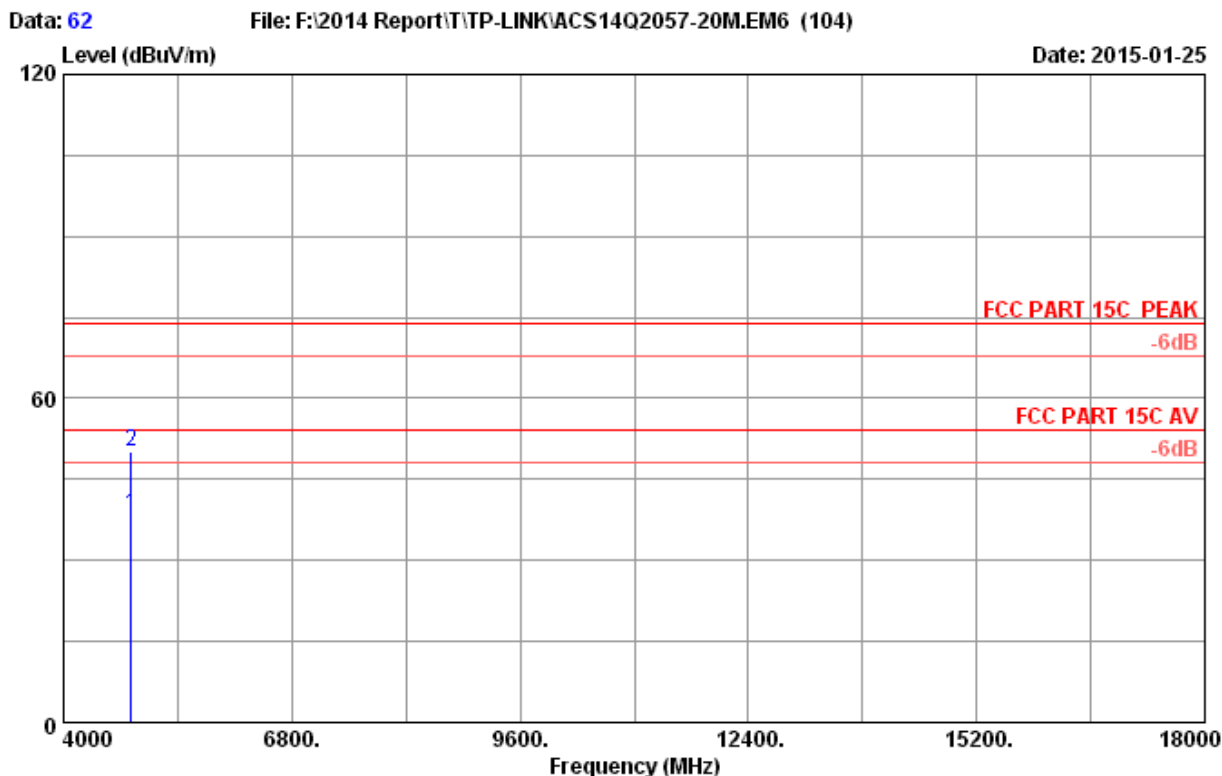


Site no. : 3m Chamber Data no. : 62
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	32.88	8.58	35.70	32.78	38.54	54.00	15.46	Average
2	4824.000	32.88	8.58	35.70	44.39	50.15	74.00	23.85	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

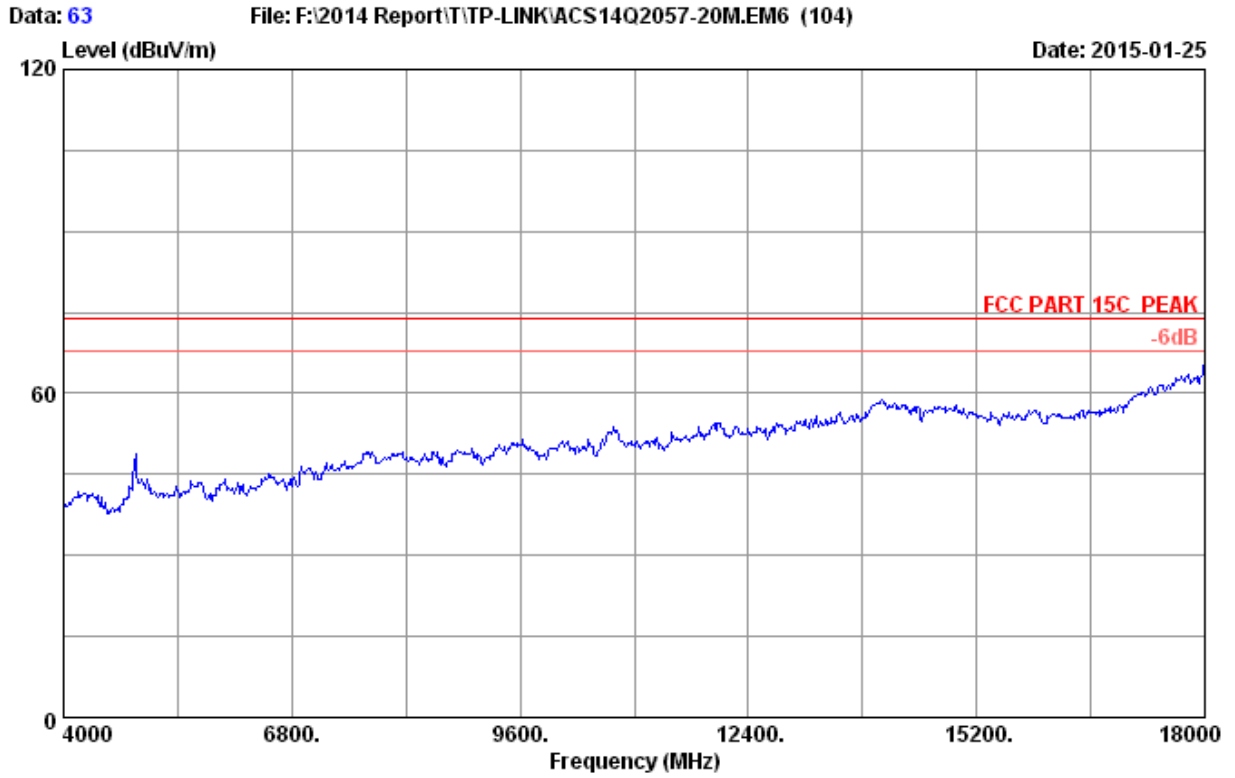


Site no. : 3m Chamber Data no. : 63
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11nHT20 2437MHz Tx
M/N : CPE210

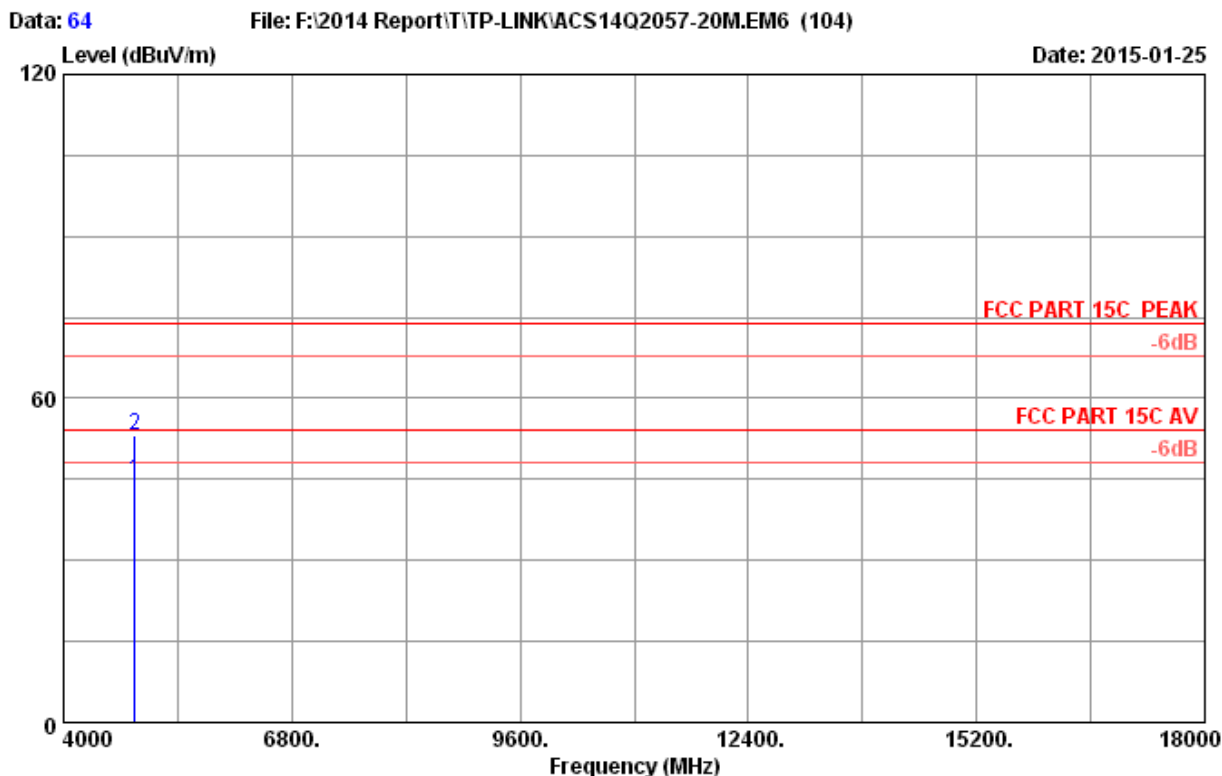


Site no. : 3m Chamber Data no. : 64
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2437MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	32.97	8.63	35.70	38.76	44.66	54.00	9.34	Average
2	4874.000	32.97	8.63	35.70	47.37	53.27	74.00	20.73	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

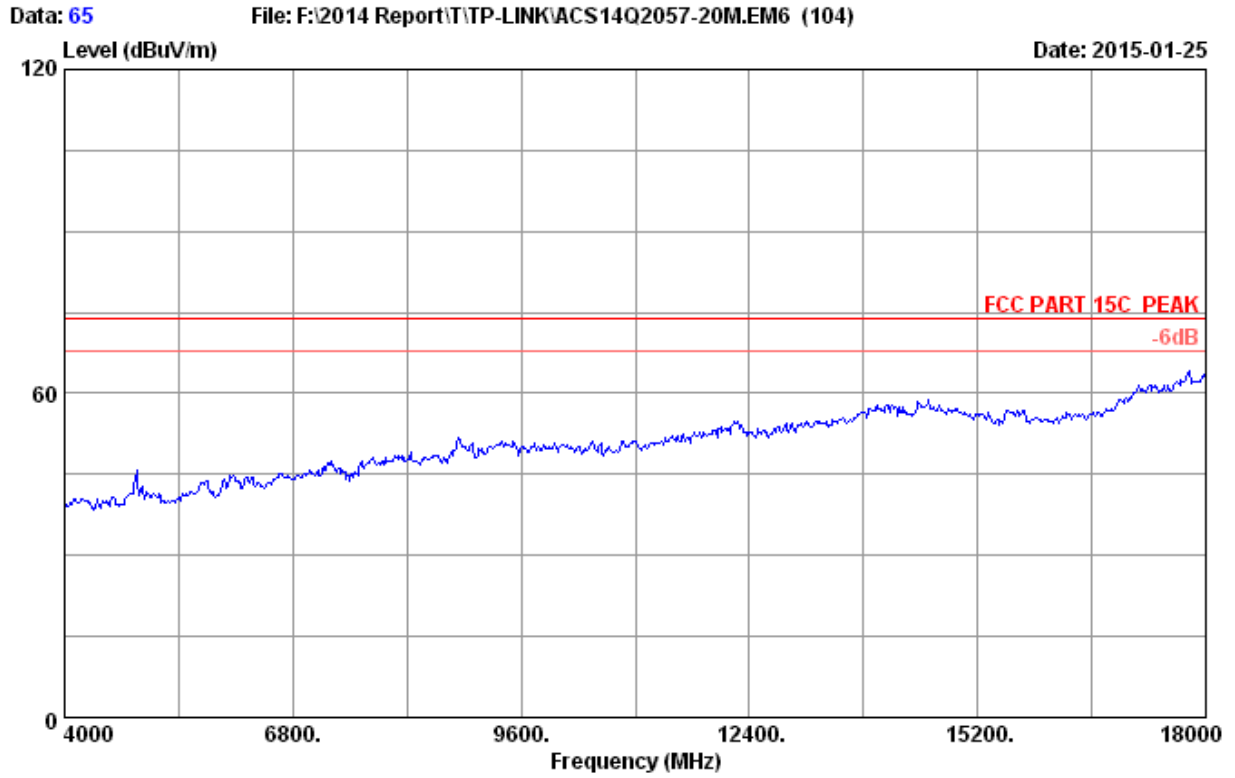


Site no. : 3m Chamber Data no. : 65
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11nHT20 2437MHz Tx
M/N : CPE210

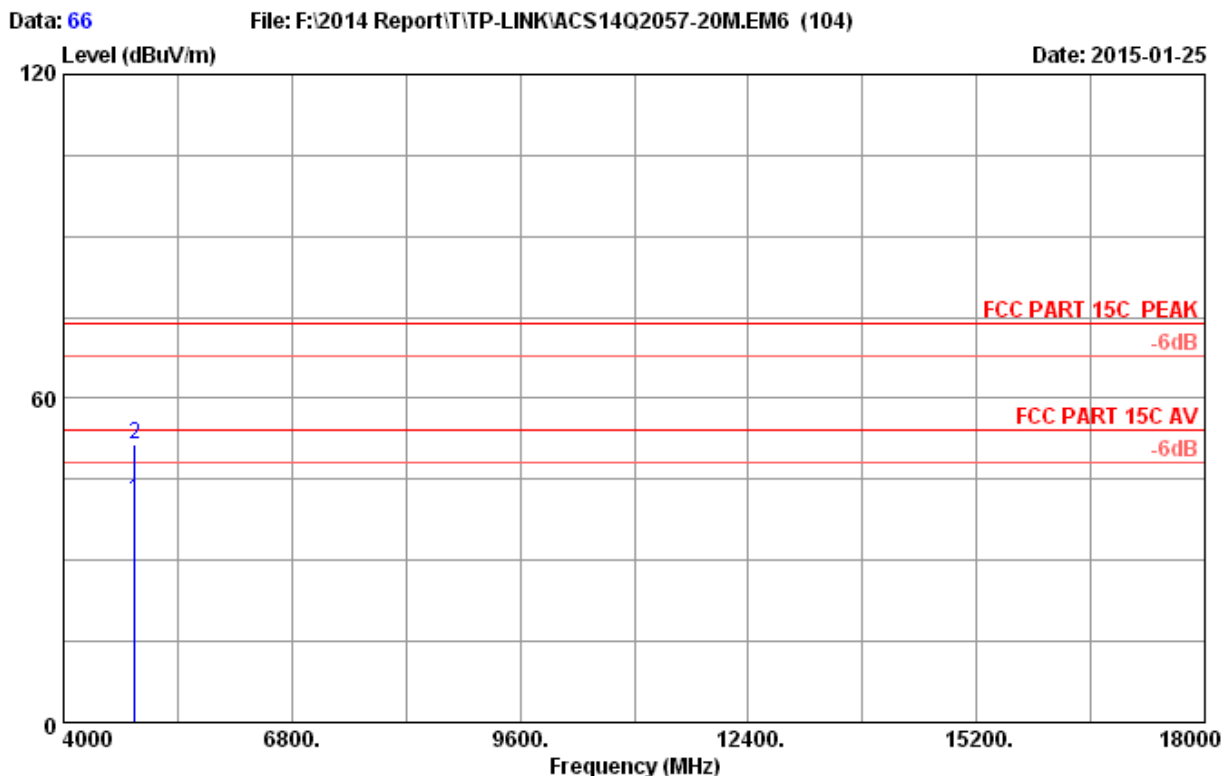

Site no. : 3m Chamber Data no. : 66
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2437MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	32.97	8.63	35.70	35.23	41.13	54.00	12.87	Average
2	4874.000	32.97	8.63	35.70	45.49	51.39	74.00	22.61	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

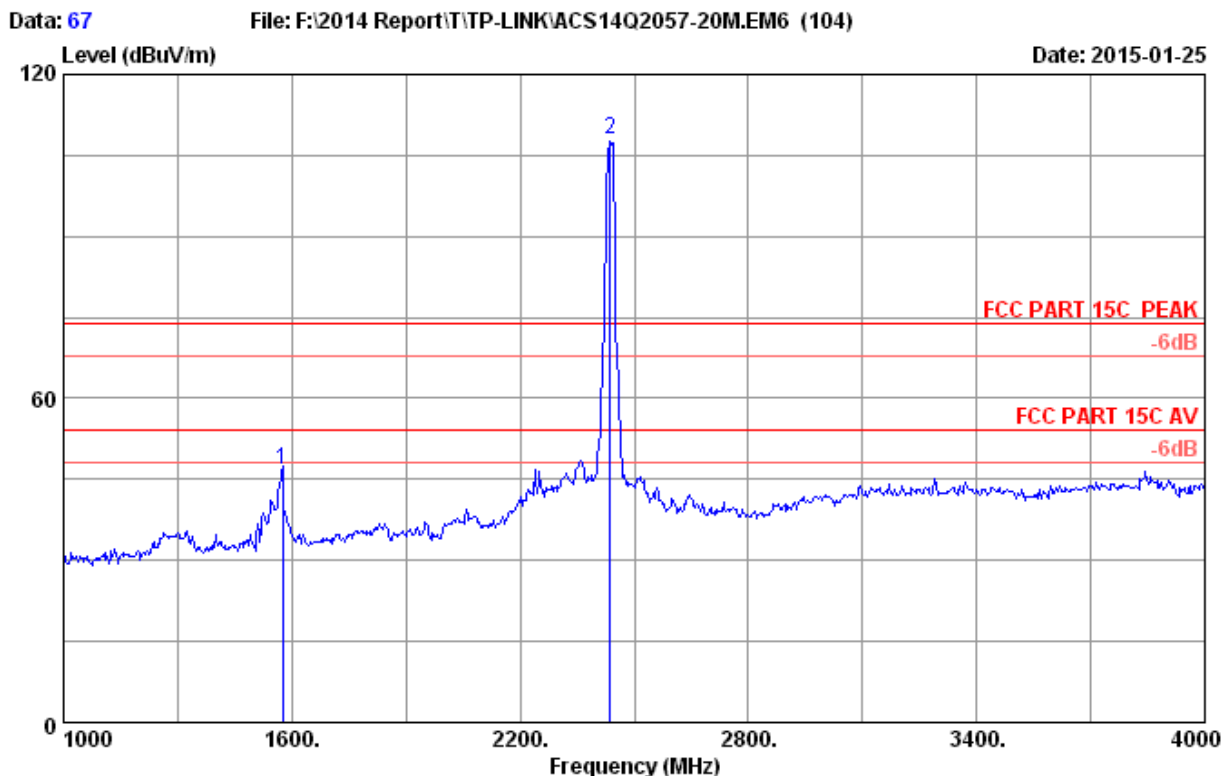

Site no. : 3m Chamber Data no. : 67
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2437MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	53.01	46.96	74.00	27.04	Peak
2	2437.000	28.26	5.85	35.70	109.54	107.95	74.00	-33.95	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

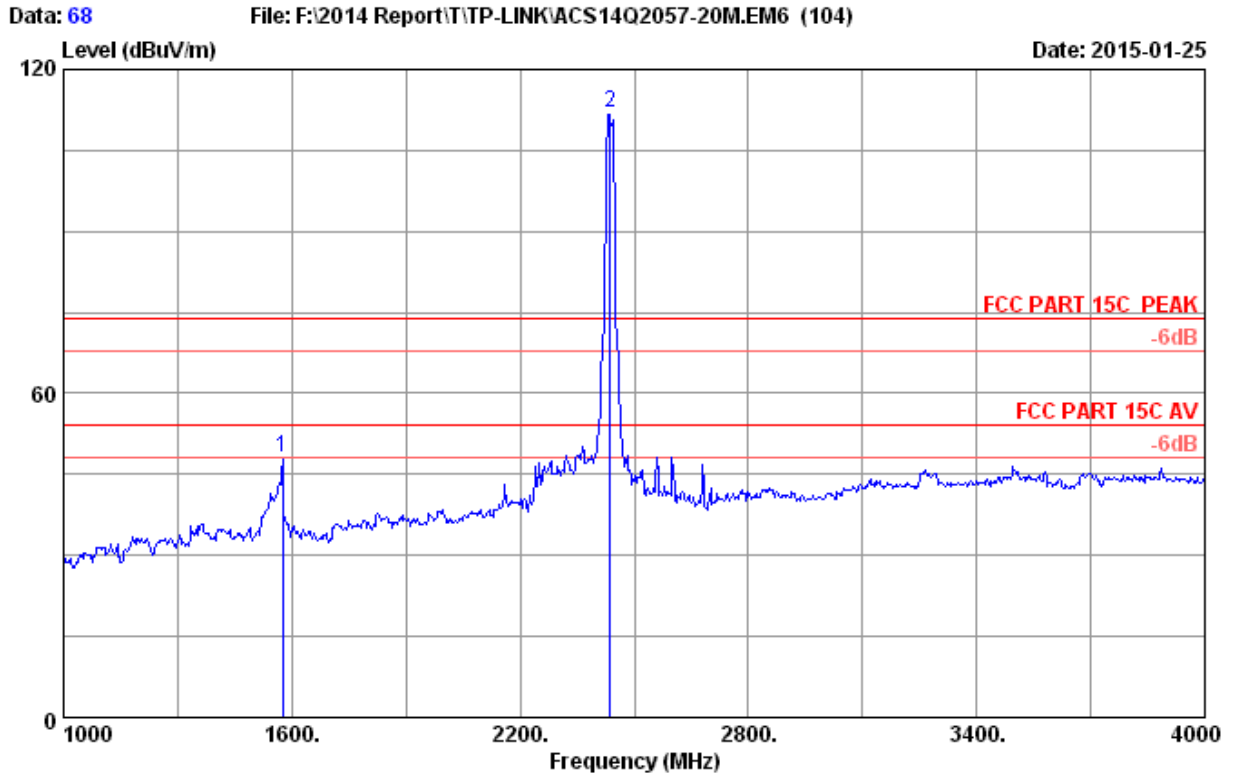


```

Site no.      : 3m Chamber                      Data no.   : 68
Dis. / Ant.  : 3m 2014 3115 (4580)             Ant. pol.  : HORIZONTAL
Limit        : FCC PART 15C PEAK
Env. / Ins.  : 23*C/54%
Engineer     : Alice_Yang
EUT          : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode    : IEEE802.11nHT20 2437MHz Tx
M/N          : CPE210
    
```

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	54.32	48.27	74.00	25.73	Peak
2	2437.000	28.26	5.85	35.70	113.57	111.98	74.00	-37.98	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

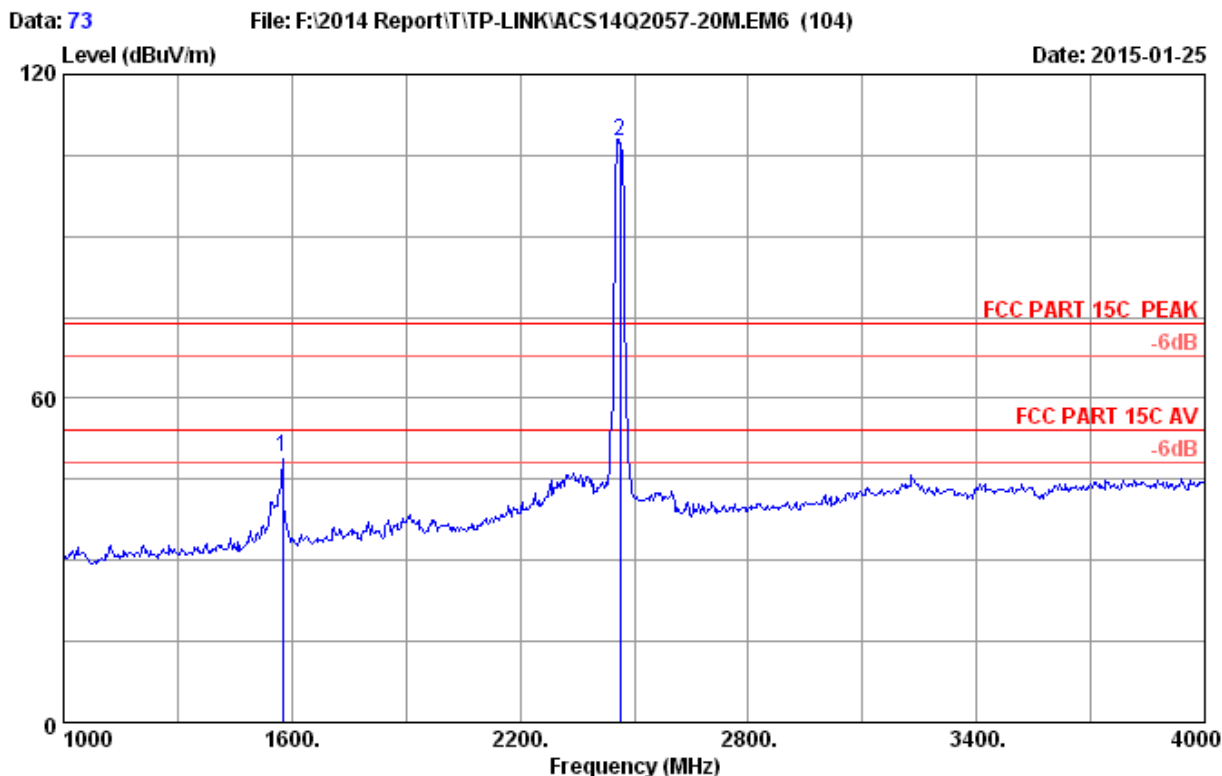


```

Site no.      : 3m Chamber                Data no.   : 73
Dis. / Ant.  : 3m 2014 3115 (4580)       Ant. pol.  : VERTICAL
Limit        : FCC PART 15C PEAK
Env. / Ins.  : 23*C/54%
Engineer     : Alice_Yang
EUT         : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode    : IEEE802.11nHT20 2462MHz Tx
M/N         : CPE210
    
```

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	55.24	49.19	74.00	24.81	Peak
2	2462.000	28.32	5.89	35.70	109.20	107.71	74.00	-33.71	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

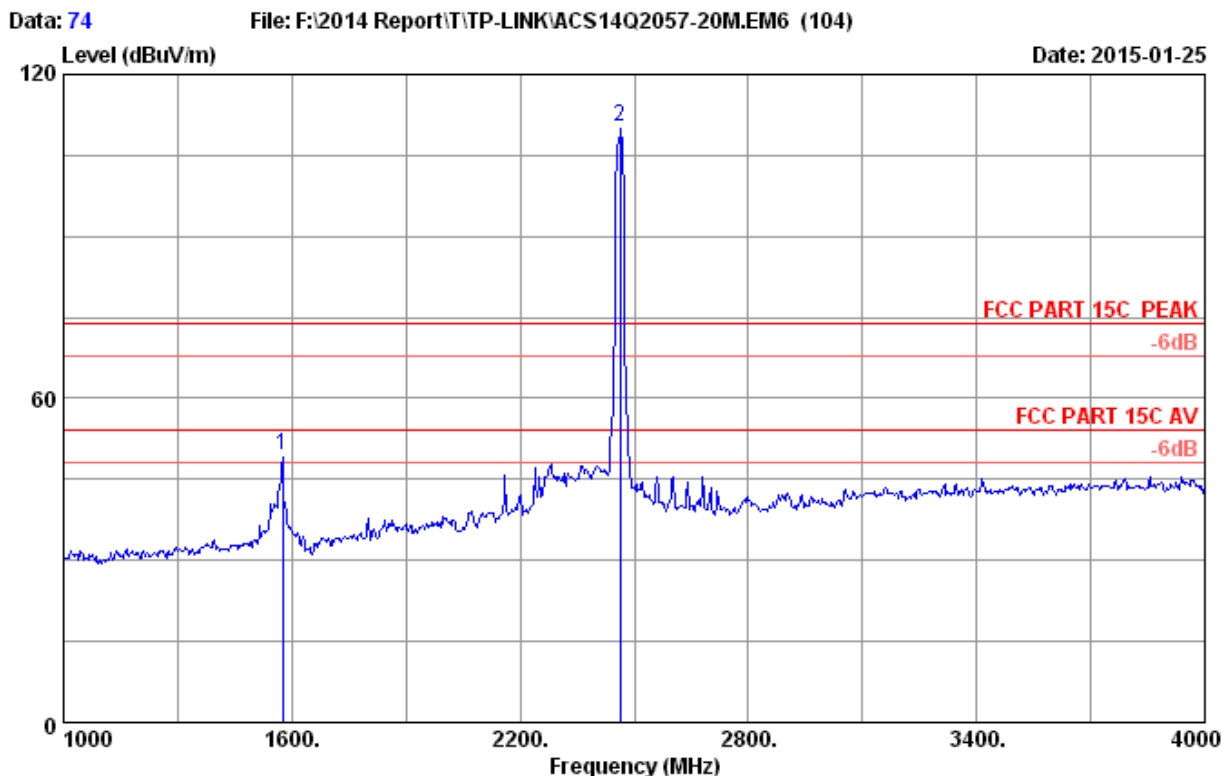


```


Site no.       : 3m Chamber                Data no.      : 74
Dis. / Ant.    : 3m 2014 3115 (4580)       Ant. pol.    : HORIZONTAL
Limit          : FCC PART 15C PEAK
Env. / Ins.    : 23*C/54%
Engineer       : Alice_Yang
EUT            : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating   : DC 24V From POE Input AC 120V/60Hz
Test Mode      : IEEE802.11nHT20 2462MHz Tx
M/N            : CPE210
    
```

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	55.37	49.32	74.00	24.68	Peak
2	2462.000	28.32	5.89	35.70	111.78	110.29	74.00	-36.29	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

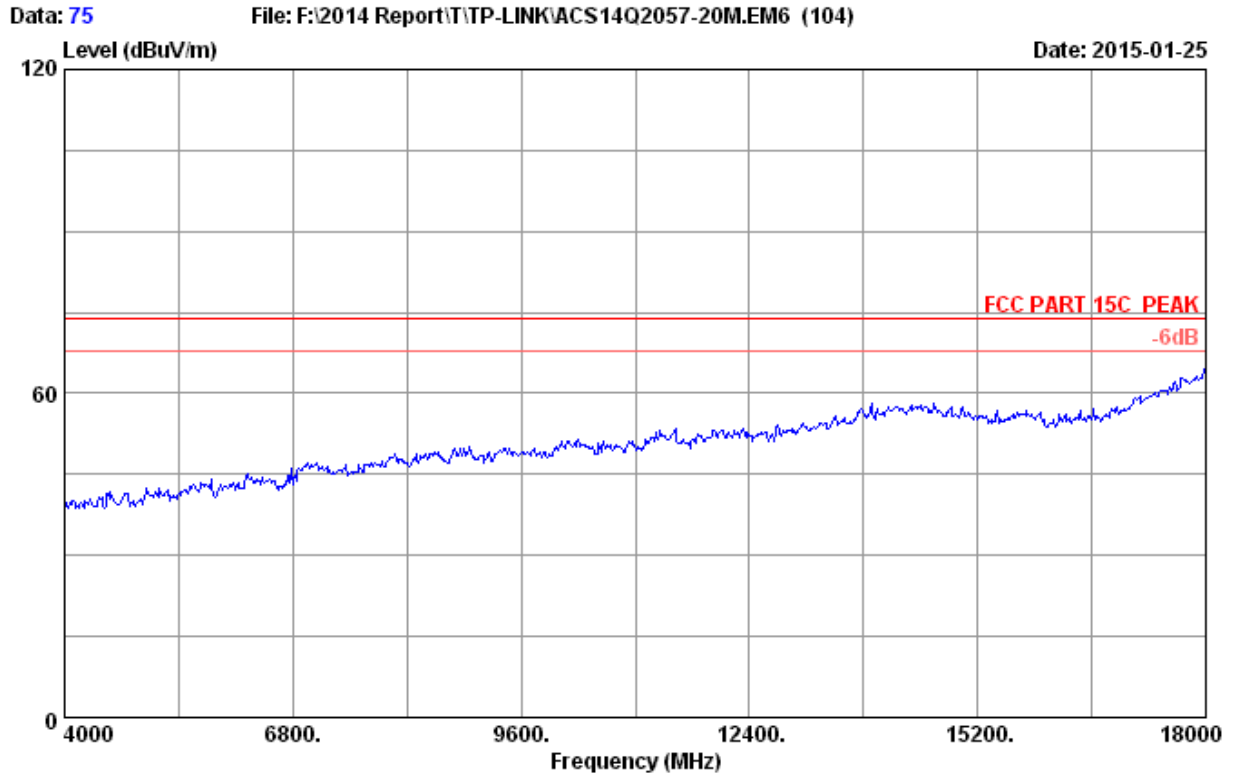


Site no. : 3m Chamber Data no. : 75
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11nHT20 2462MHz Tx
M/N : CPE210

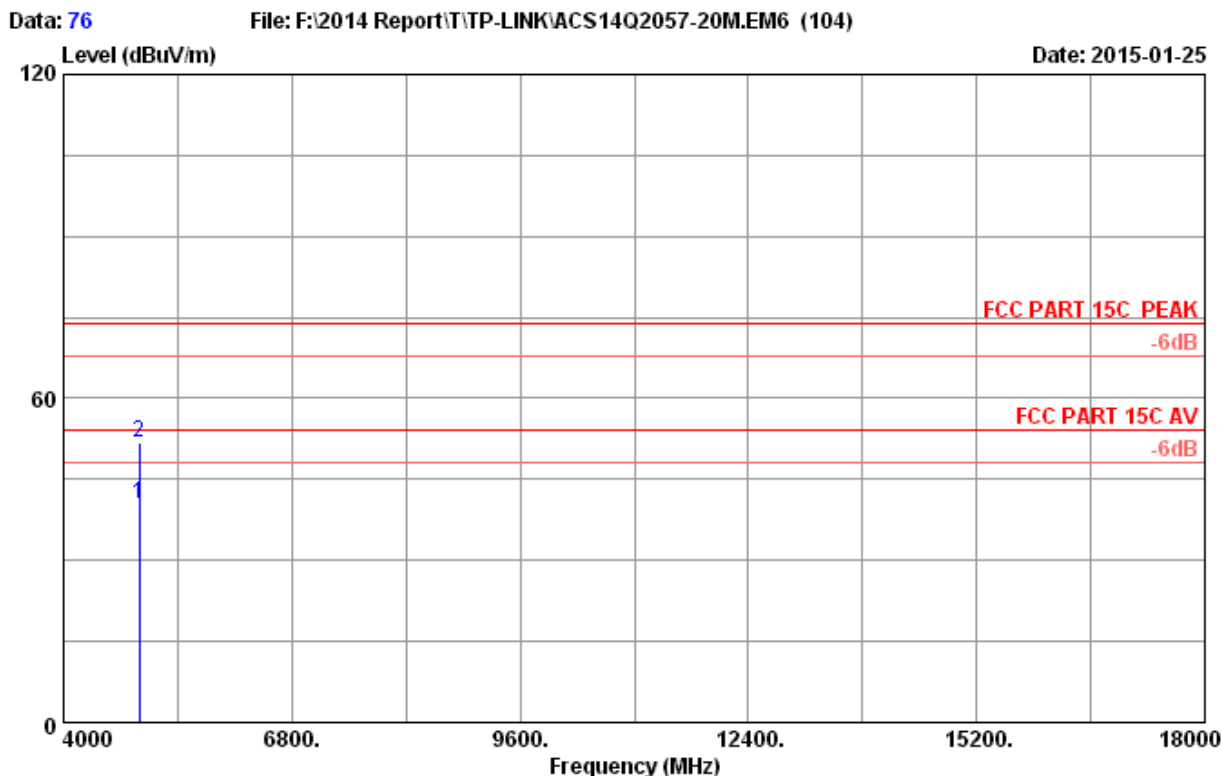


Site no. : 3m Chamber Data no. : 76
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.000	33.06	8.69	35.70	34.51	40.56	54.00	13.44	Average
2	4924.000	33.06	8.69	35.70	45.73	51.78	74.00	22.22	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

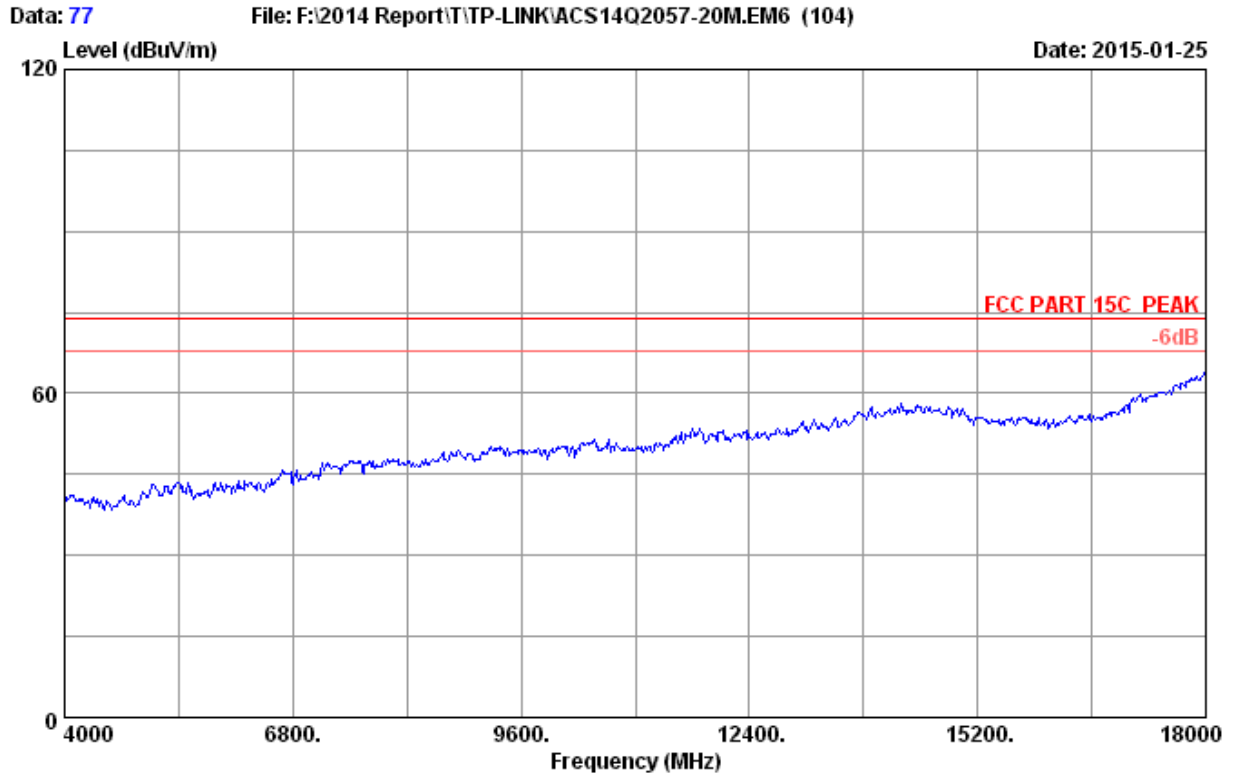


Site no. : 3m Chamber Data no. : 77
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11nHT20 2462MHz Tx
M/N : CPE210

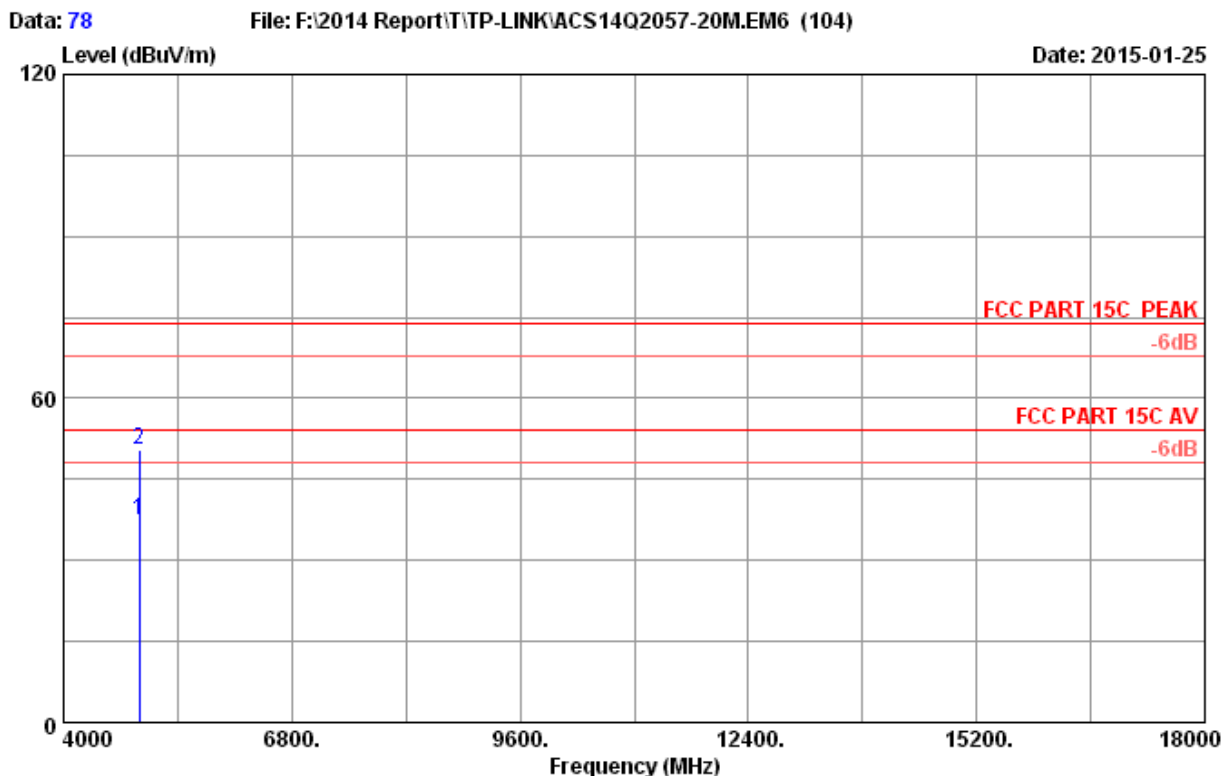


Site no. : 3m Chamber Data no. : 78
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.000	33.06	8.69	35.70	31.25	37.30	54.00	16.70	Average
2	4924.000	33.06	8.69	35.70	44.37	50.42	74.00	23.58	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

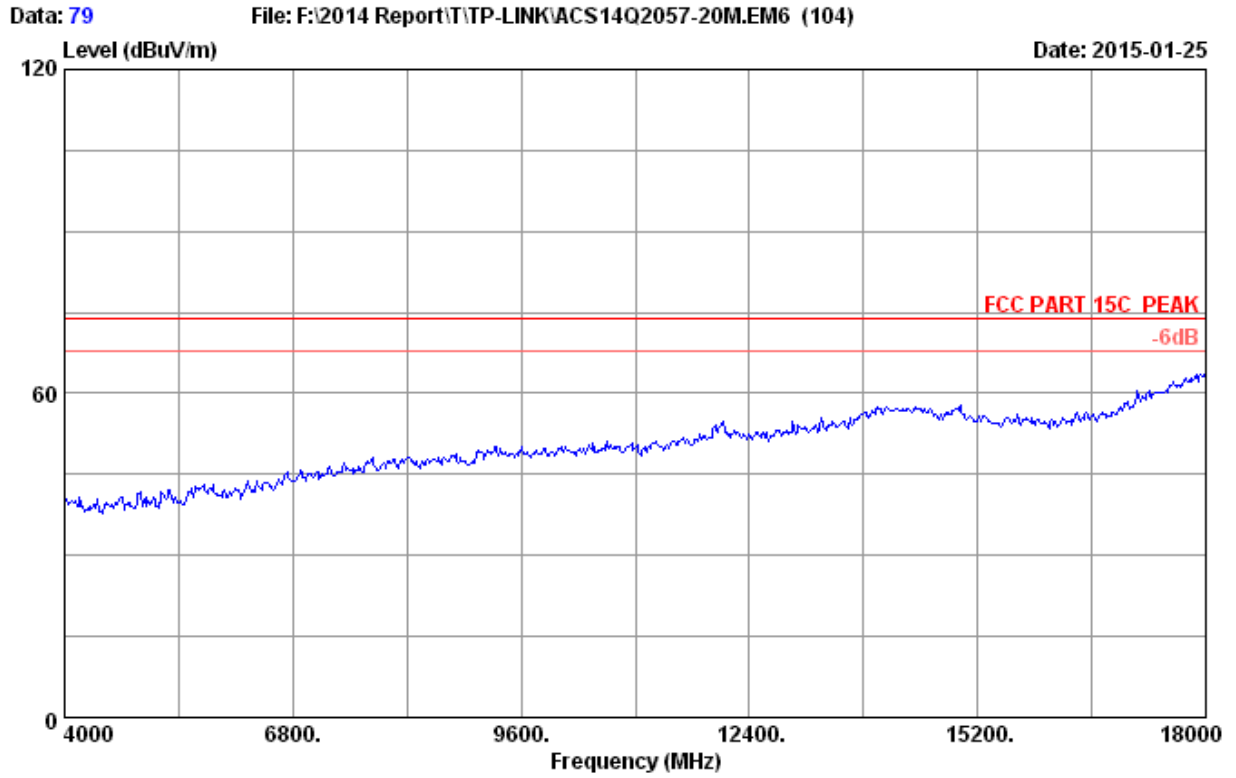


Site no. : 3m Chamber Data no. : 79
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11nHT40 2422MHz Tx
M/N : CPE210

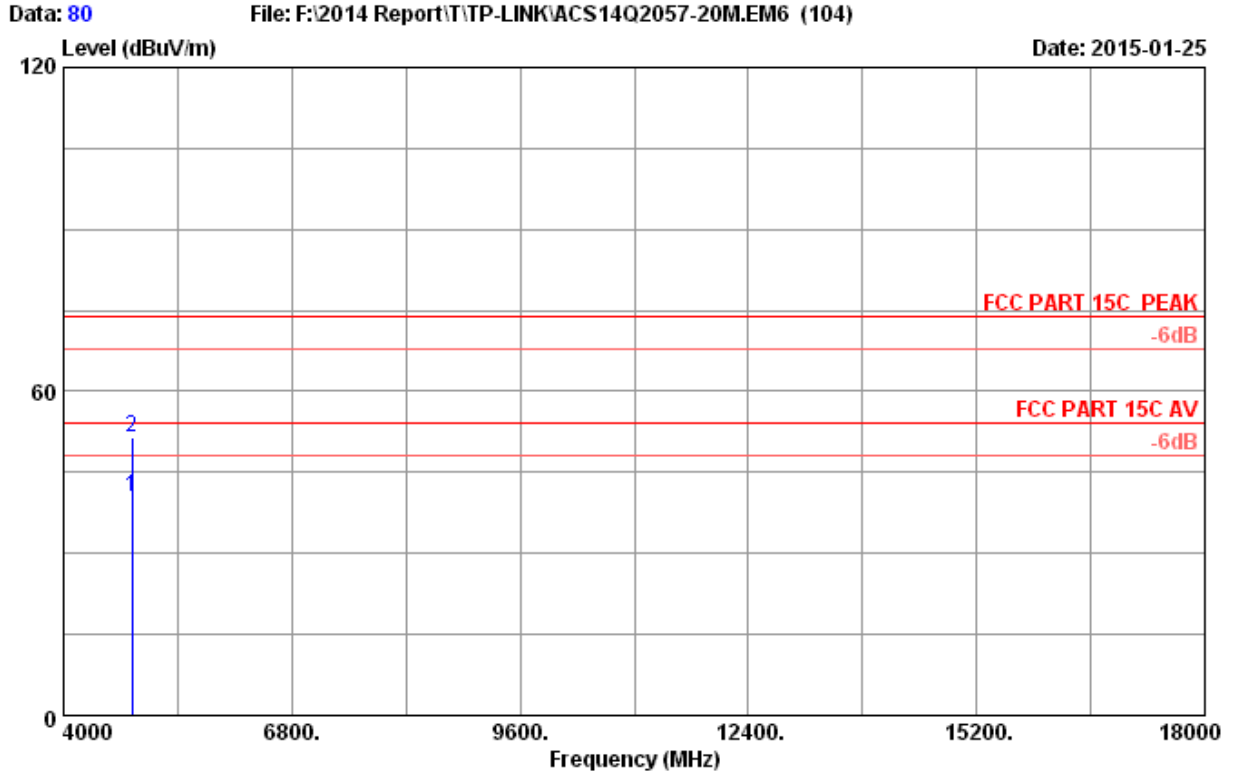


Site no. : 3m Chamber Data no. : 80
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2422MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4844.000	32.92	8.60	35.70	34.51	40.33	54.00	13.67	Average
2	4844.000	32.92	8.60	35.70	45.81	51.63	74.00	22.37	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

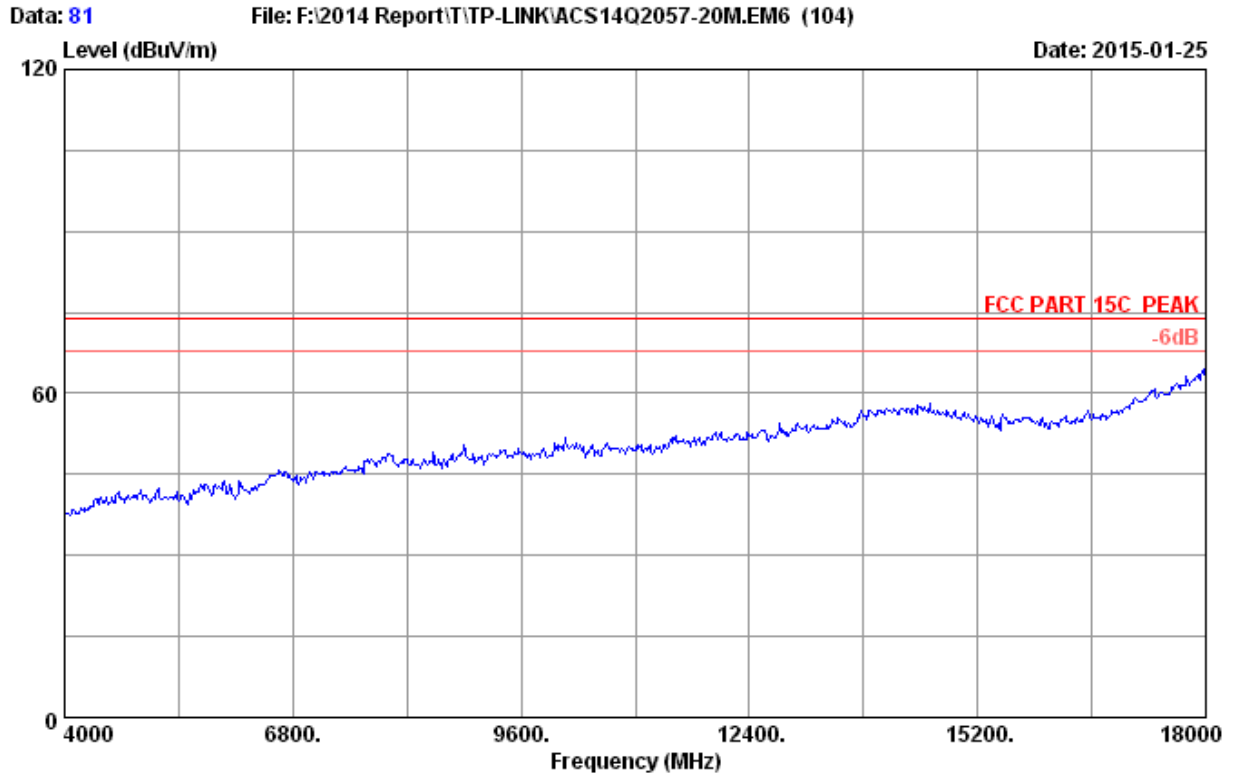

Site no. : 3m Chamber Data no. : 81
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11nHT40 2422MHz Tx
M/N : CPE210

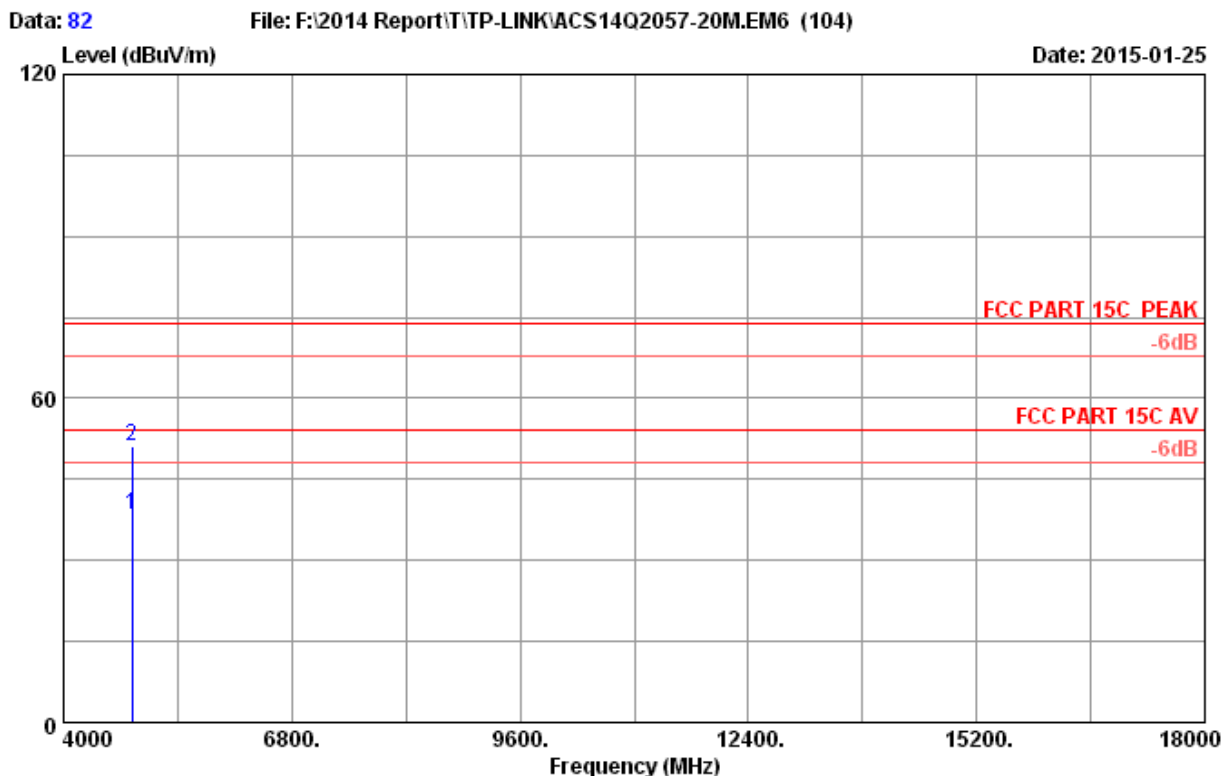

Site no. : 3m Chamber Data no. : 82
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2422MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4844.000	32.92	8.60	35.70	32.75	38.57	54.00	15.43	Average
2	4844.000	32.92	8.60	35.70	45.29	51.11	74.00	22.89	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.


40MHz

Frequency: 30MHz~1GHz

Data: 11

File: E:\2014 Report Data\T\TP-LINK\ACS14Q2057.EM6 (18)

Date: 2015-01-25

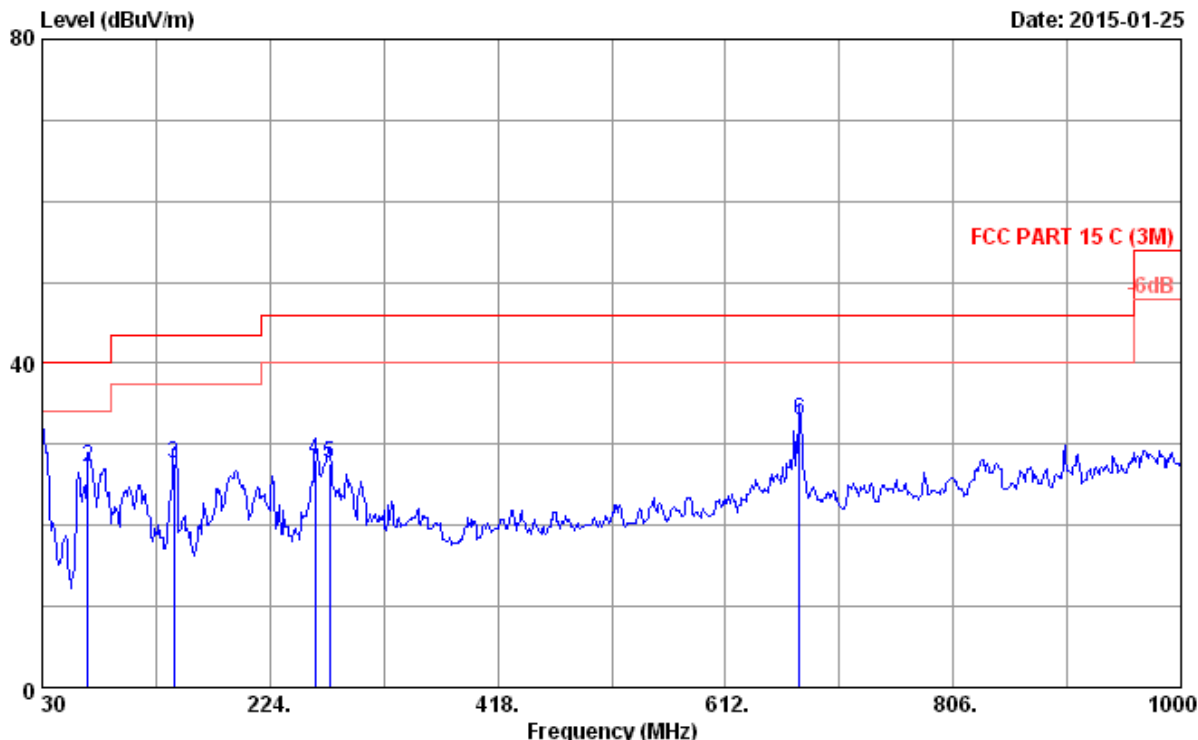

Site no. : 3m Chamber Data no. : 11
 Dis. / Ant. : 3m 2013 CBL6112D 35375 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 22.5°C/47% Engineer : Leo-Li
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : Tx Mode
 M/N:CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.000	20.10	0.83	9.44	30.37	40.00	9.63	QP
2	68.800	6.74	1.27	19.07	27.08	40.00	12.92	QP
3	142.520	11.77	1.57	14.25	27.59	43.50	15.91	QP
4	262.800	13.96	2.03	12.02	28.01	46.00	17.99	QP
5	274.440	13.50	2.07	12.14	27.71	46.00	18.29	QP
6	675.050	19.80	3.25	9.92	32.97	46.00	13.03	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Data: 12

File: E:\2014 Report Data\T\TP-LINK\ACS14Q2057.EM6 (18)

Date: 2015-01-25



Site no. : 3m Chamber Data no. : 12
 Dis. / Ant. : 3m 2013 CBL6112D 35375 Ant. pol. : VERTICAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 22.5°C/47% Engineer : Leo-Li
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : Tx Mode
 M/N:CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	31.940	18.84	0.86	10.79	30.49	40.00	9.51	QP
2	61.040	6.65	1.24	21.80	29.69	40.00	10.31	QP
3	112.450	12.45	1.46	17.25	31.16	43.50	12.34	QP
4	141.550	11.89	1.57	16.90	30.36	43.50	13.14	QP
5	190.050	9.70	1.75	17.30	28.75	43.50	14.75	QP
6	657.590	19.60	3.20	7.66	30.46	46.00	15.54	QP


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Frequency: 1GHz~18GHz


Data: 79

File: F:\2014 Report\T\TP-LINK\ACS14Q2057-20M.EM6 (104)

Date: 2015-01-25

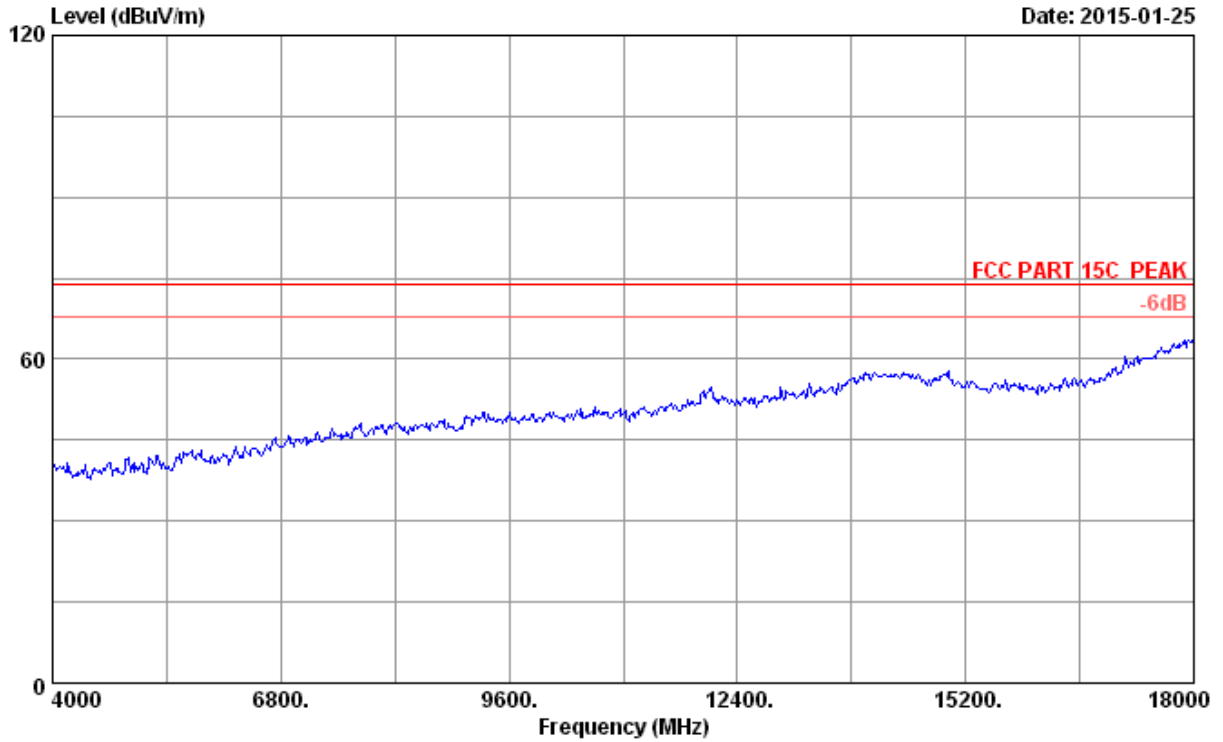


Site no. : 3m Chamber Data no. : 79
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23°C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11nHT40 2422MHz Tx
M/N : CPE210

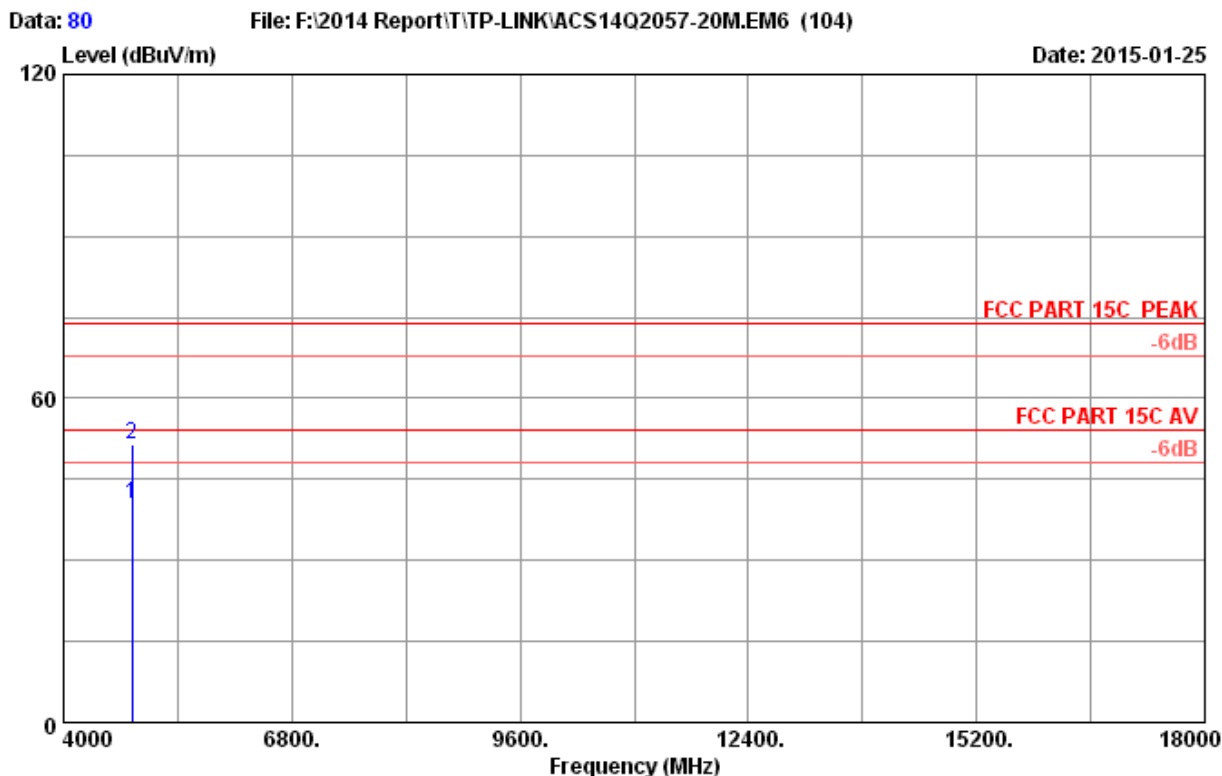


Site no. : 3m Chamber Data no. : 80
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2422MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4844.000	32.92	8.60	35.70	34.51	40.33	54.00	13.67	Average
2	4844.000	32.92	8.60	35.70	45.81	51.63	74.00	22.37	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

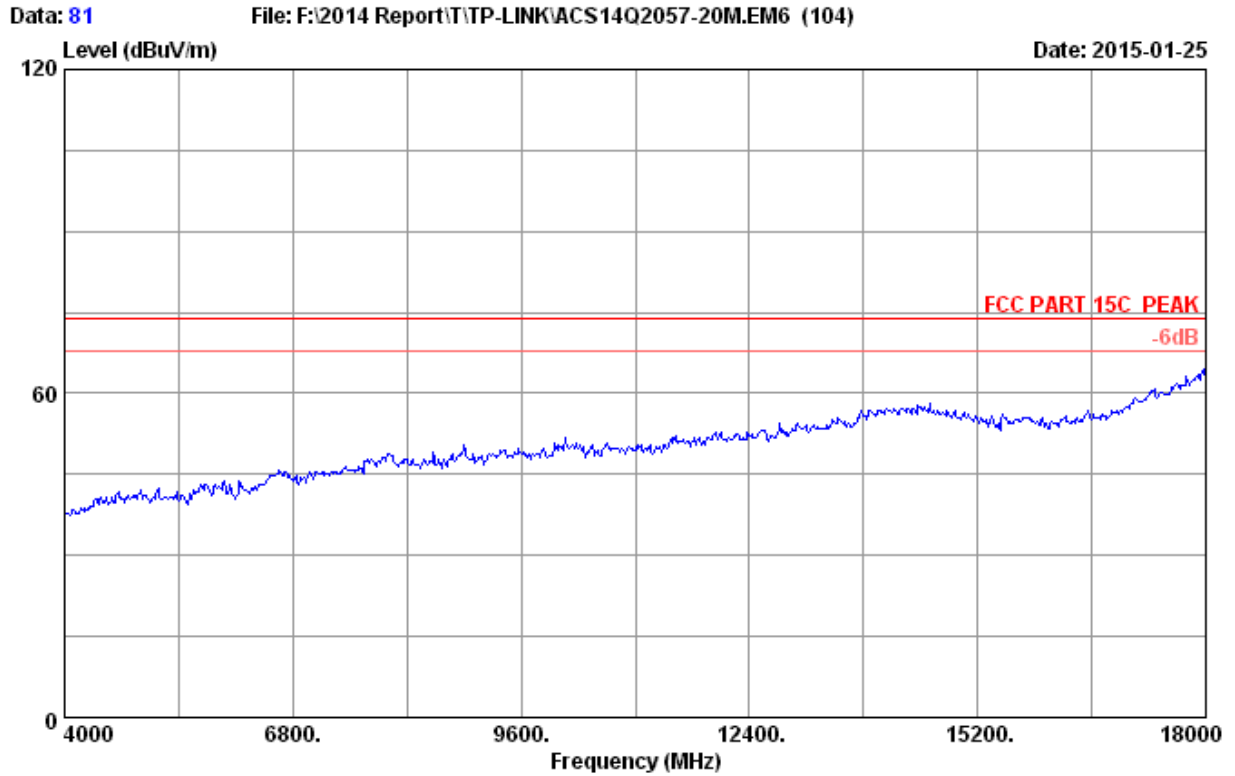


Site no. : 3m Chamber Data no. : 81
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11nHT40 2422MHz Tx
M/N : CPE210

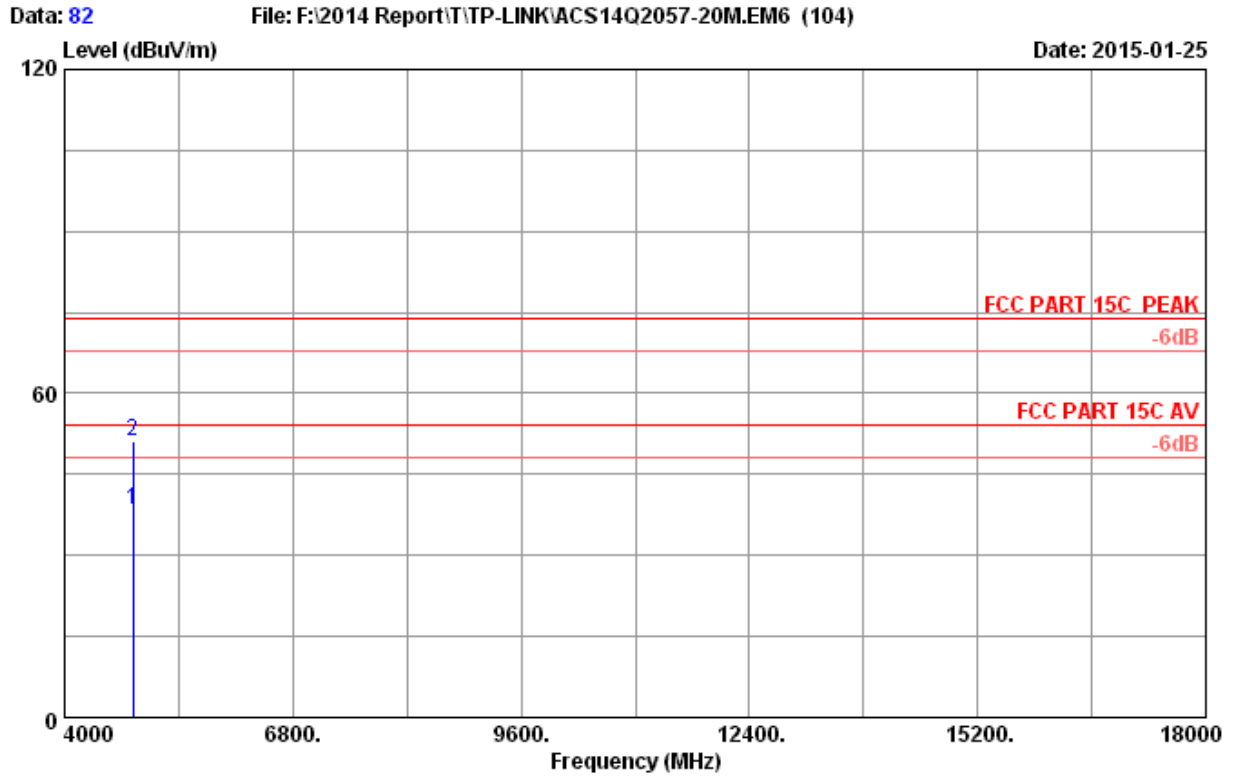

Site no. : 3m Chamber Data no. : 82
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2422MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4844.000	32.92	8.60	35.70	32.75	38.57	54.00	15.43	Average
2	4844.000	32.92	8.60	35.70	45.29	51.11	74.00	22.89	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

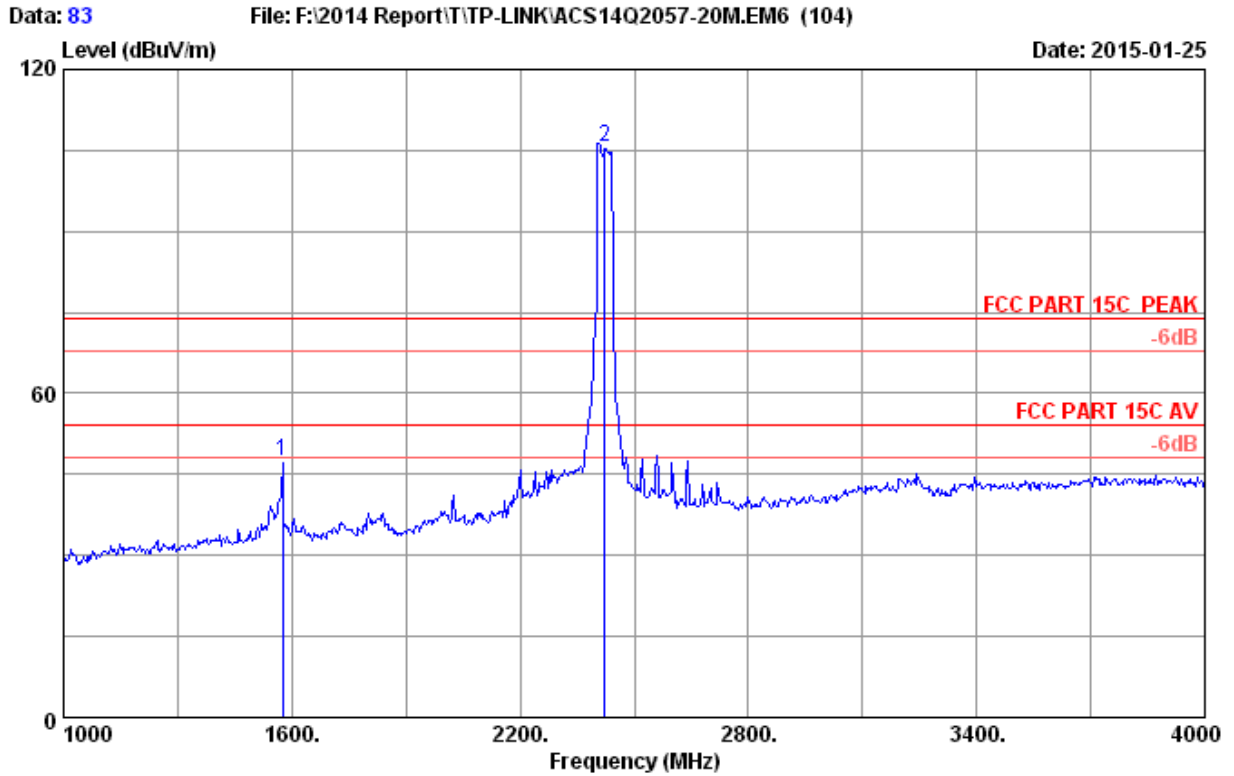

Site no. : 3m Chamber Data no. : 83
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2422MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	53.47	47.42	74.00	26.58	Peak
2	2422.000	28.23	5.83	35.70	107.38	105.74	74.00	-31.74	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

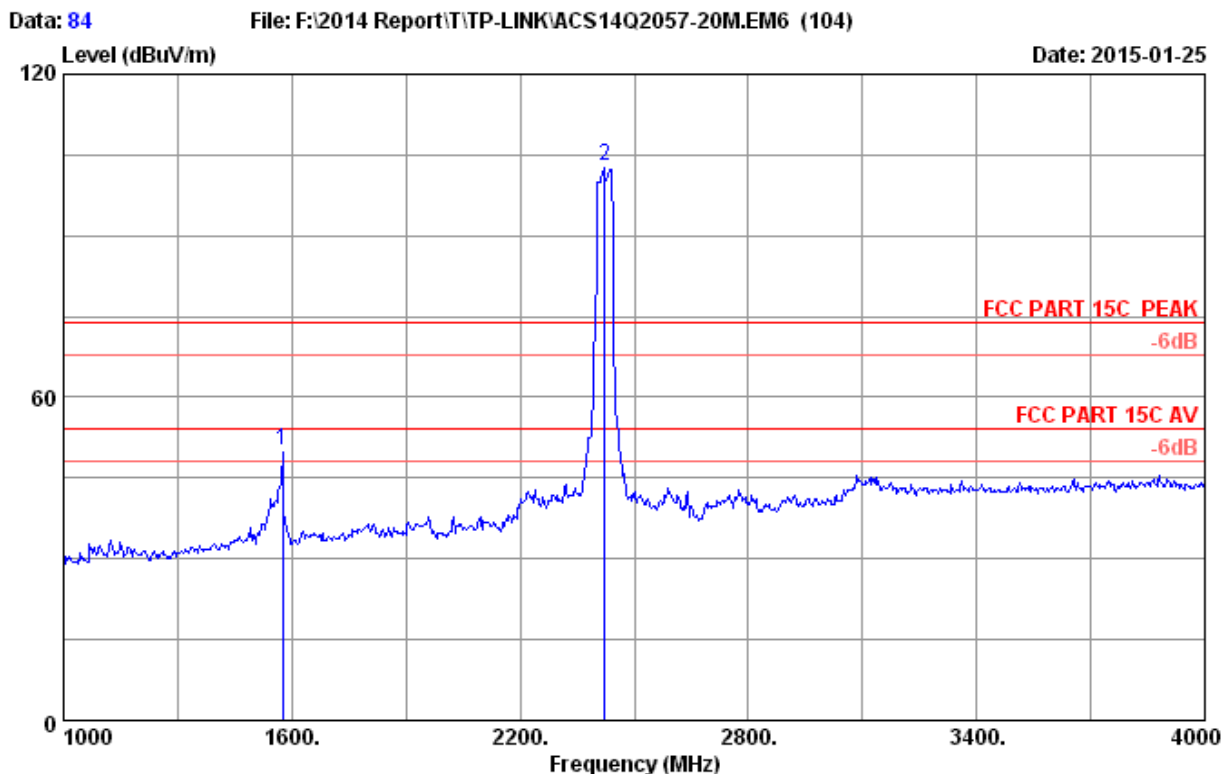

Site no. : 3m Chamber Data no. : 84
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2422MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	56.22	50.17	74.00	23.83	Peak
2	2422.000	28.23	5.83	35.70	104.76	103.12	74.00	-29.12	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

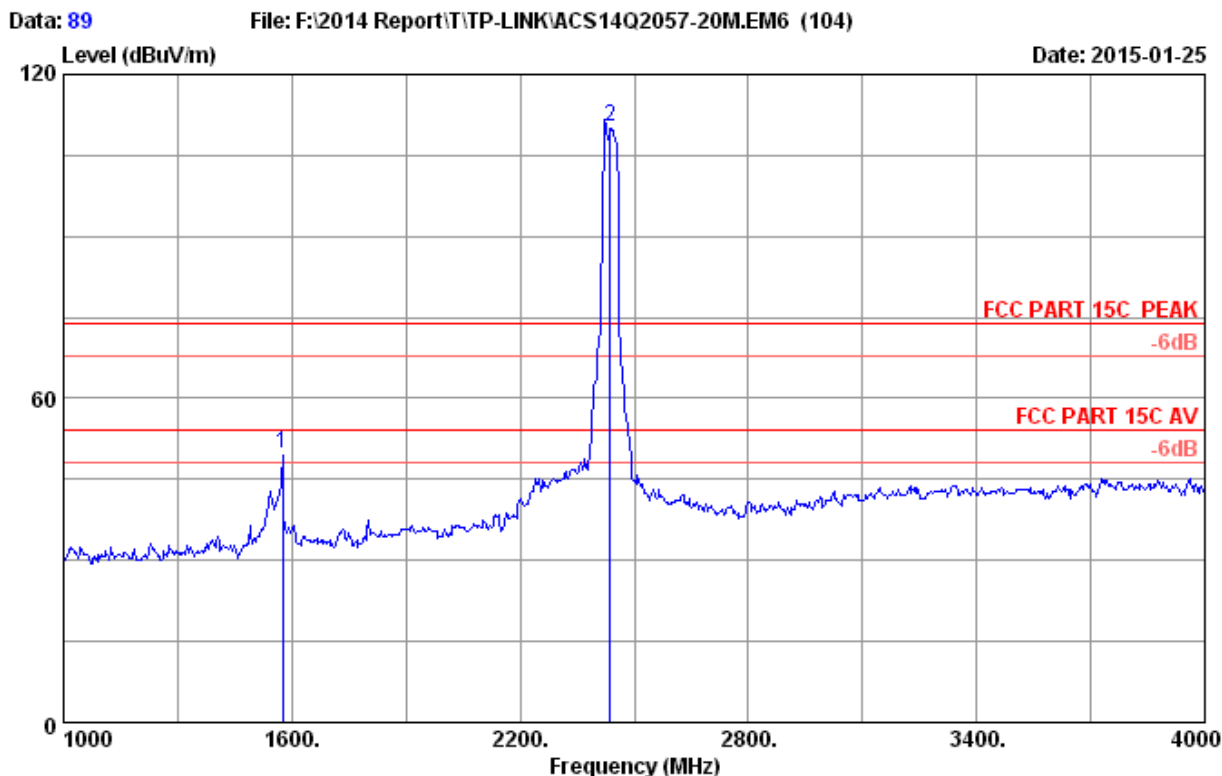

Site no. : 3m Chamber Data no. : 89
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2437MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	55.81	49.76	74.00	24.24	Peak
2	2437.000	28.26	5.85	35.70	111.89	110.30	74.00	-36.30	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

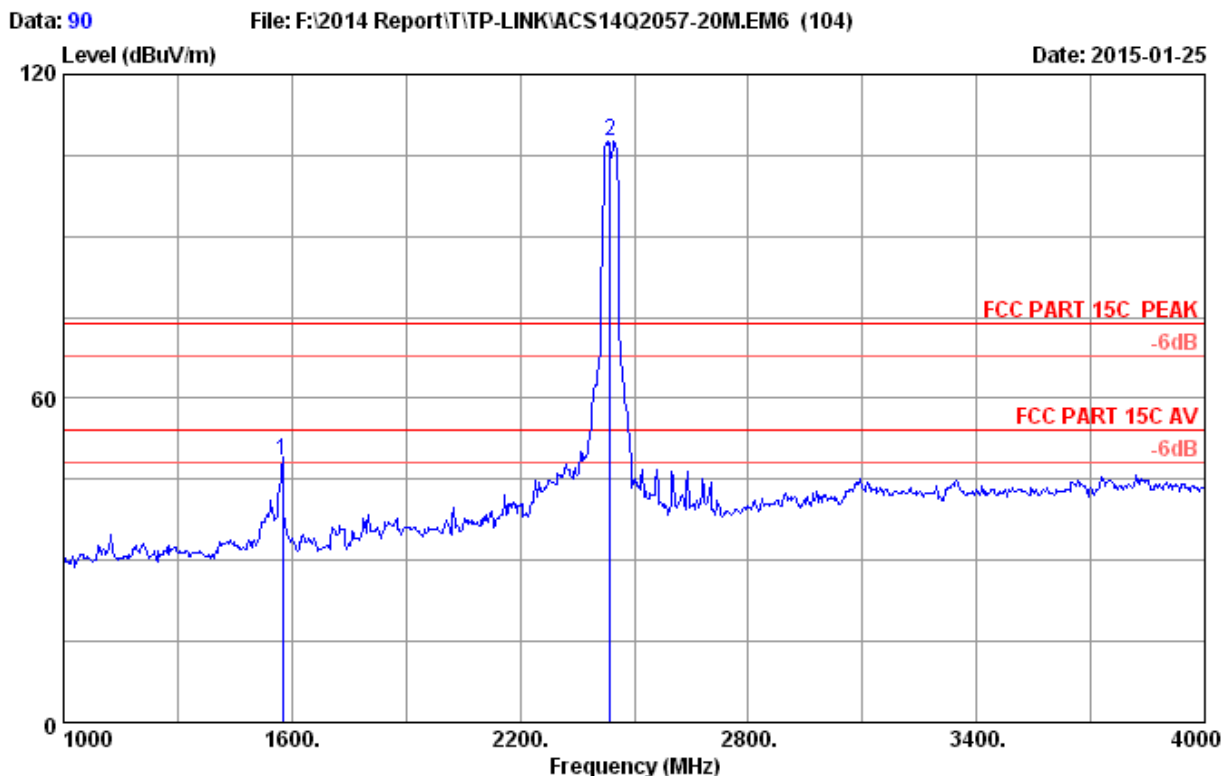


Site no. : 3m Chamber Data no. : 90
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2437MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	54.62	48.57	74.00	25.43	Peak
2	2437.000	28.26	5.85	35.70	109.35	107.76	74.00	-33.76	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

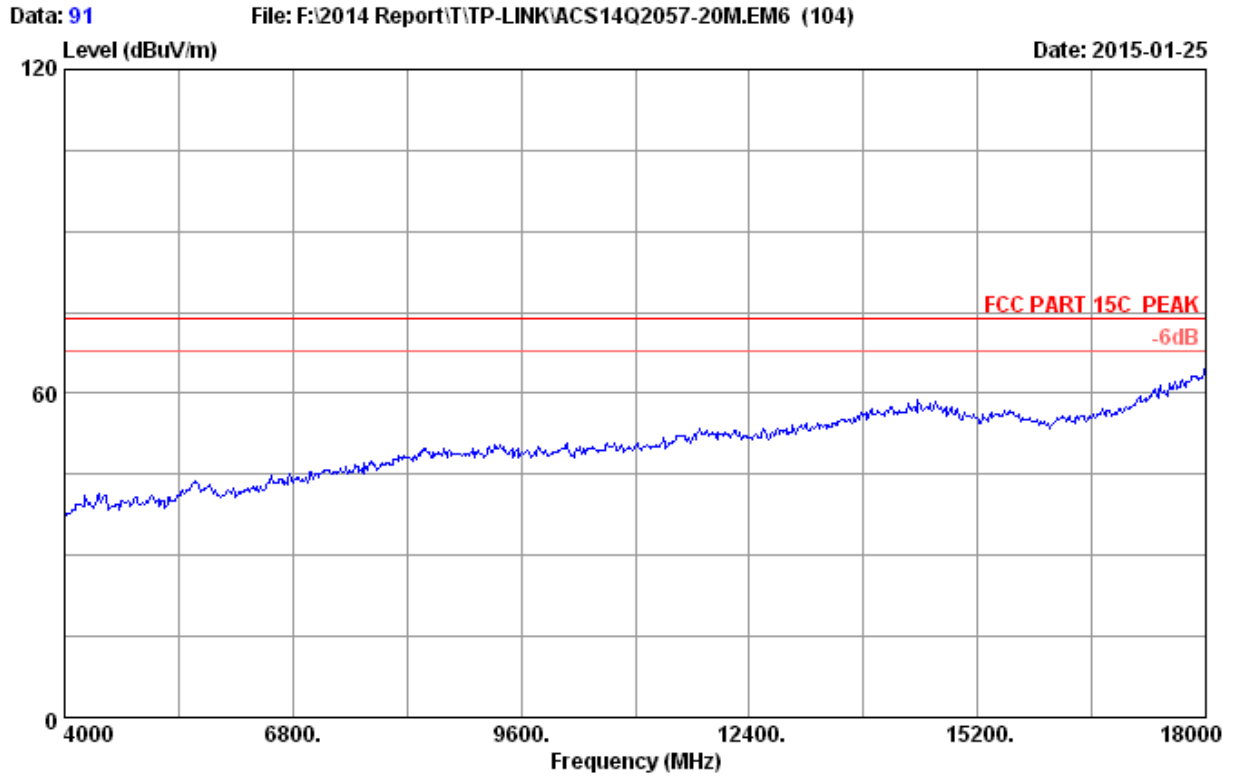


Site no. : 3m Chamber Data no. : 91
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11nHT40 2437MHz Tx
M/N : CPE210

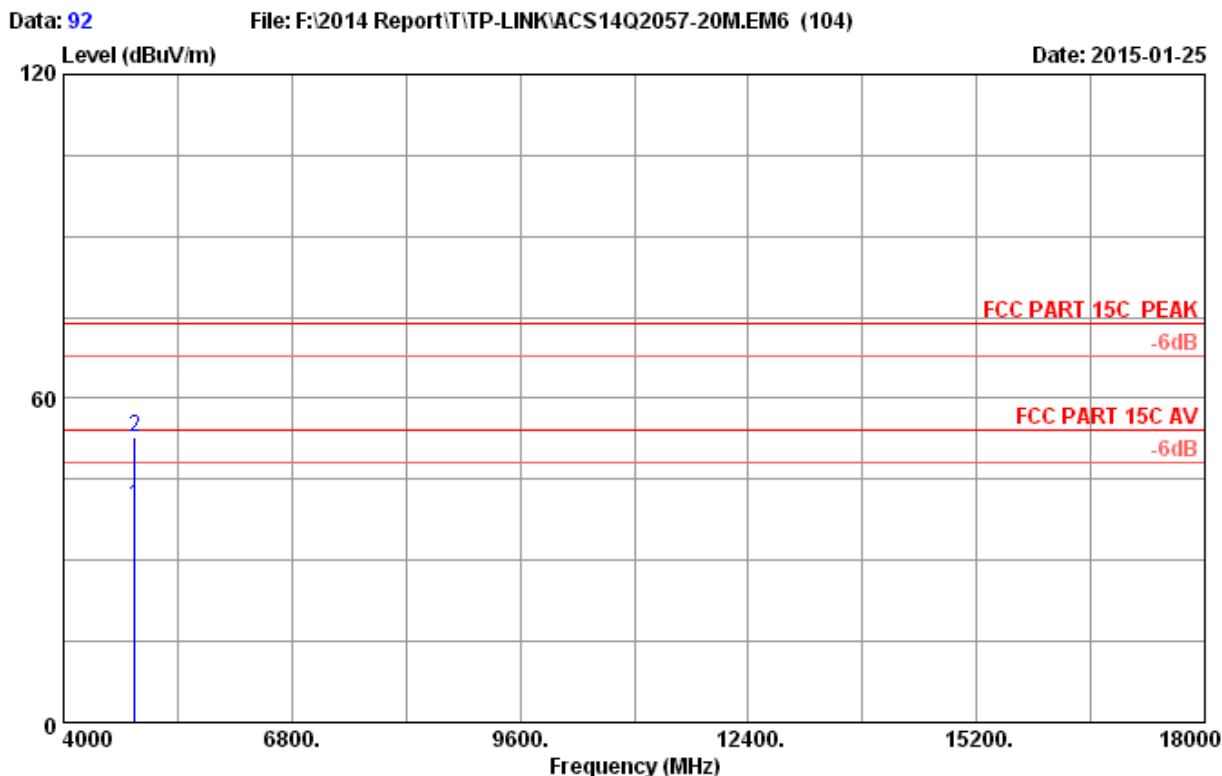


Site no. : 3m Chamber Data no. : 92
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2437MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	32.97	8.63	35.70	34.26	40.16	54.00	13.84	Average
2	4874.000	32.97	8.63	35.70	46.76	52.66	74.00	21.34	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

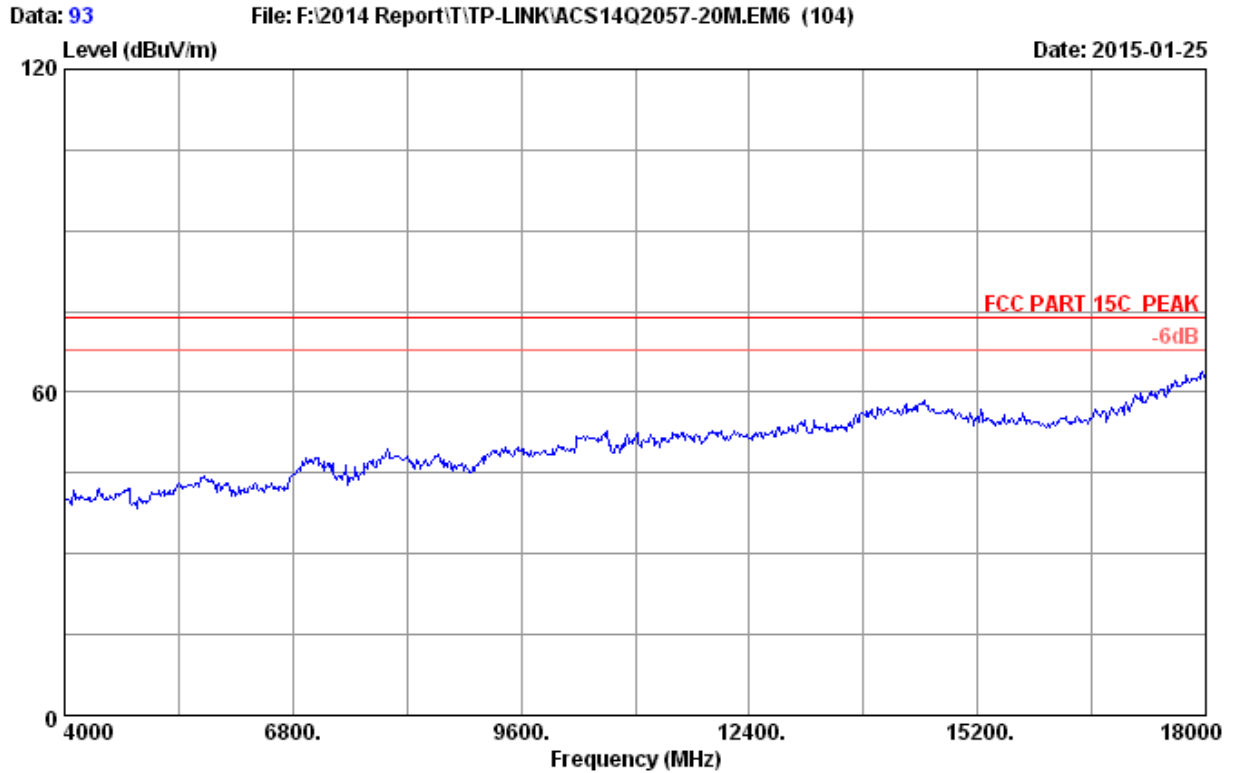


Site no. : 3m Chamber Data no. : 93
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11nHT40 2437MHz Tx
M/N : CPE210

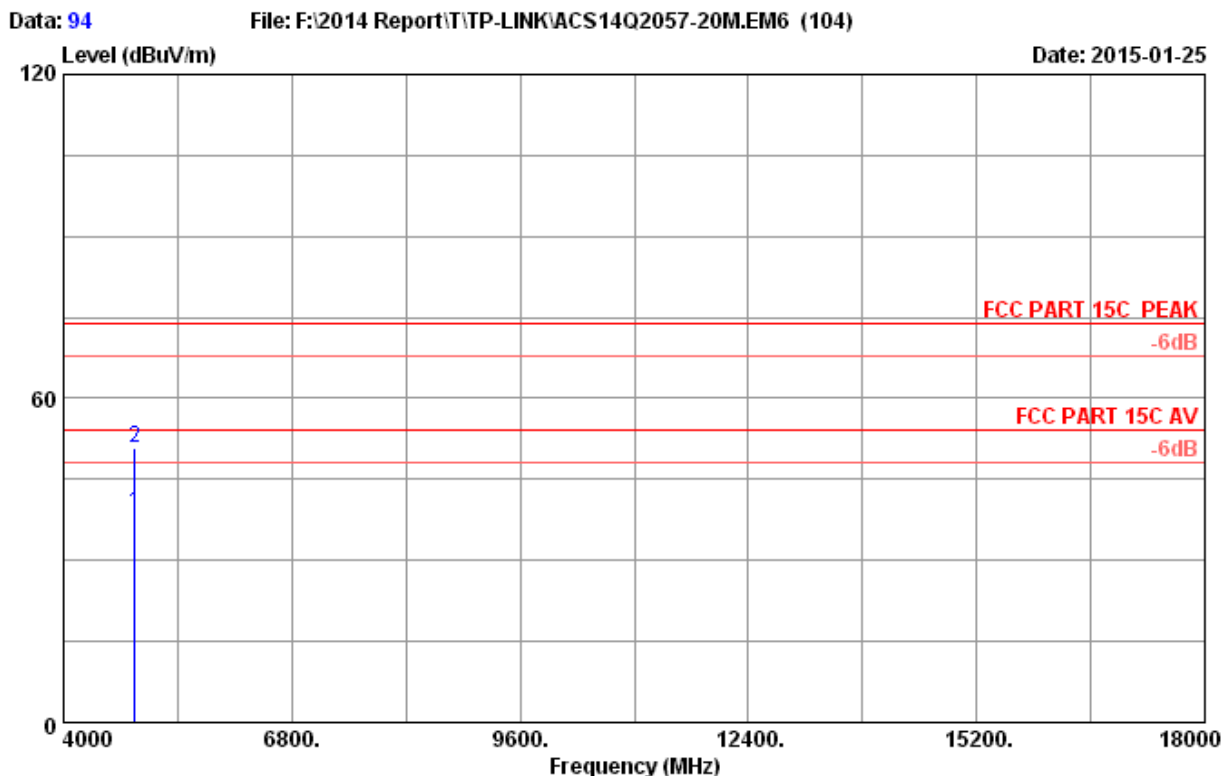


Site no. : 3m Chamber Data no. : 94
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2437MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	32.97	8.63	35.70	32.82	38.72	54.00	15.28	Average
2	4874.000	32.97	8.63	35.70	44.77	50.67	74.00	23.33	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

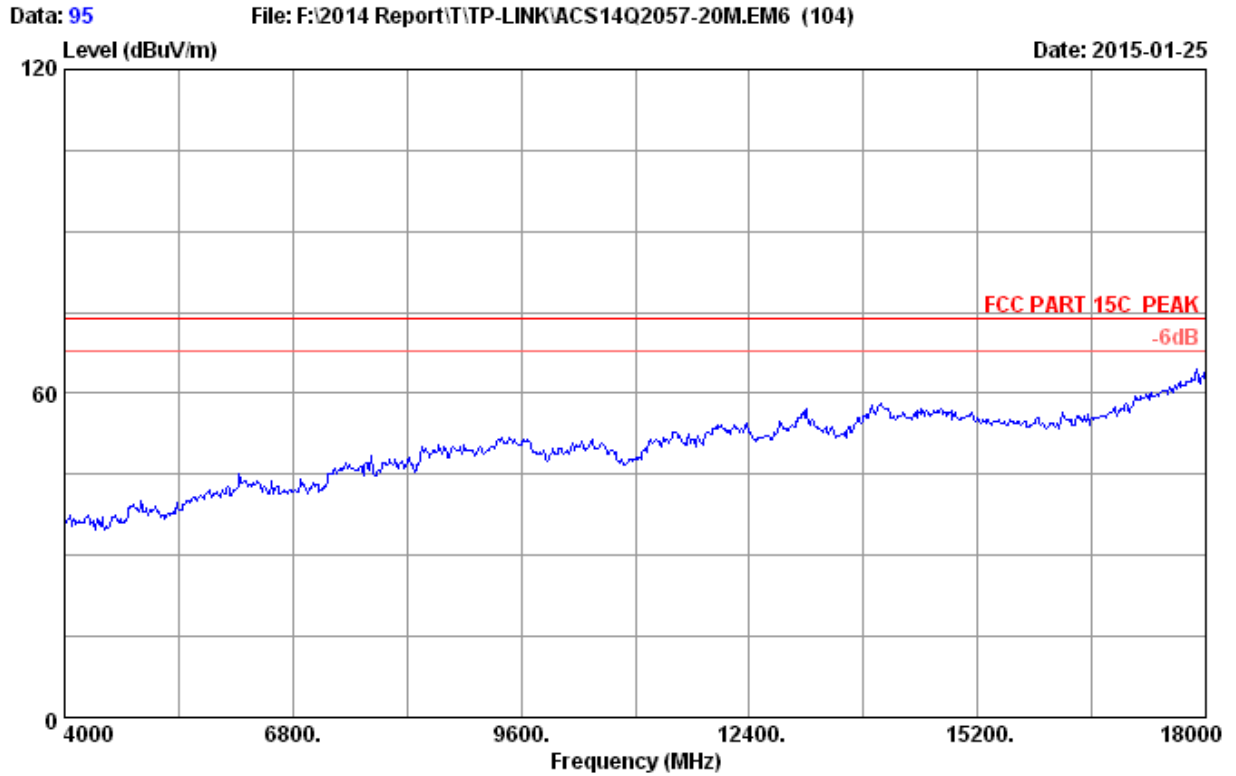


Site no. : 3m Chamber Data no. : 95
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11nHT40 2452MHz Tx
M/N : CPE210

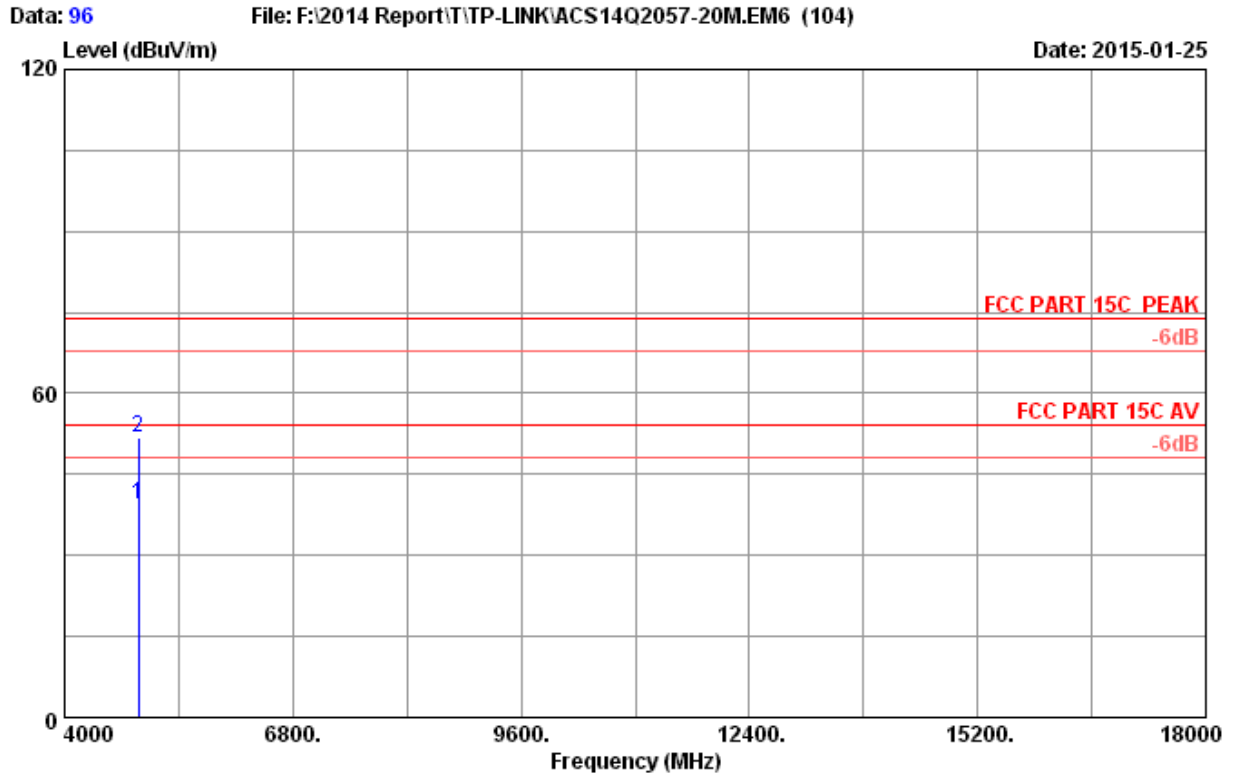


Site no. : 3m Chamber Data no. : 96
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2452MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4904.000	33.03	8.66	35.70	33.59	39.58	54.00	14.42	Average
2	4904.000	33.03	8.66	35.70	45.82	51.81	74.00	22.19	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

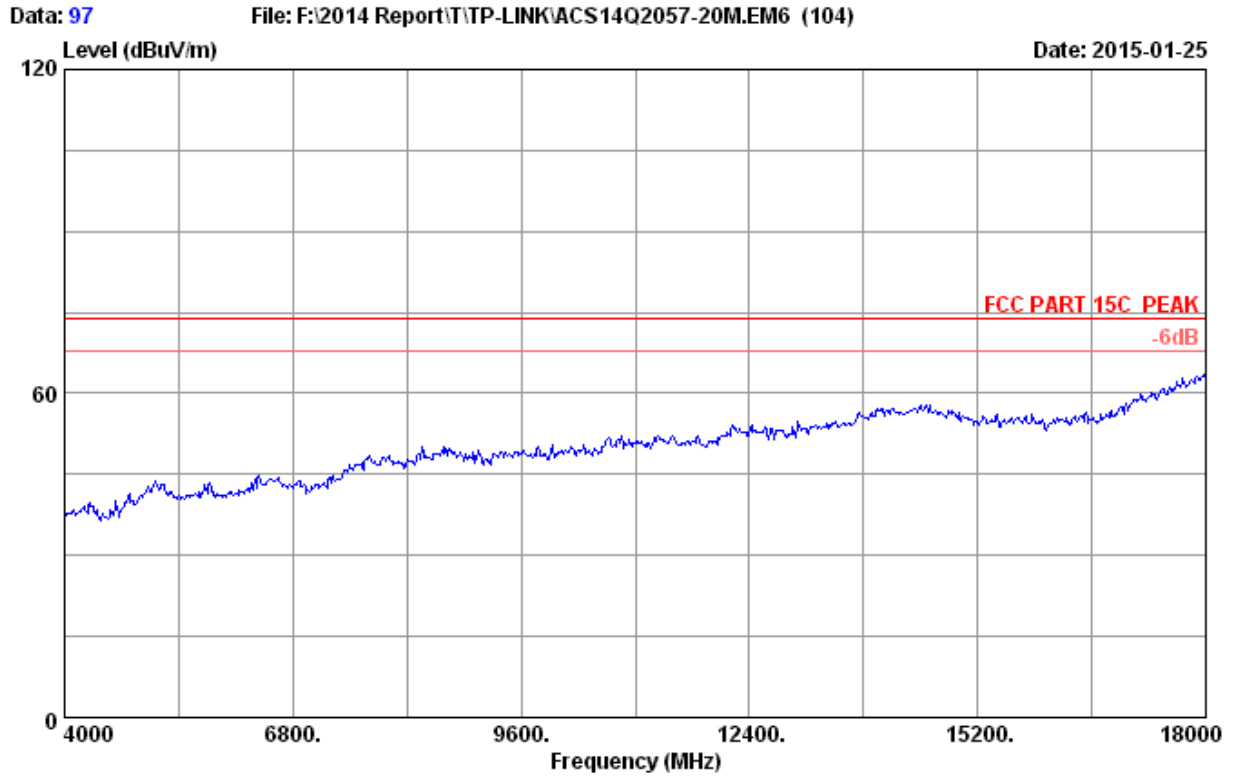

Site no. : 3m Chamber Data no. : 97
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23*C/54%
Engineer : Alice_Yang
EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating : DC 24V From POE Input AC 120V/60Hz
Test Mode : IEEE802.11nHT40 2452MHz Tx
M/N : CPE210

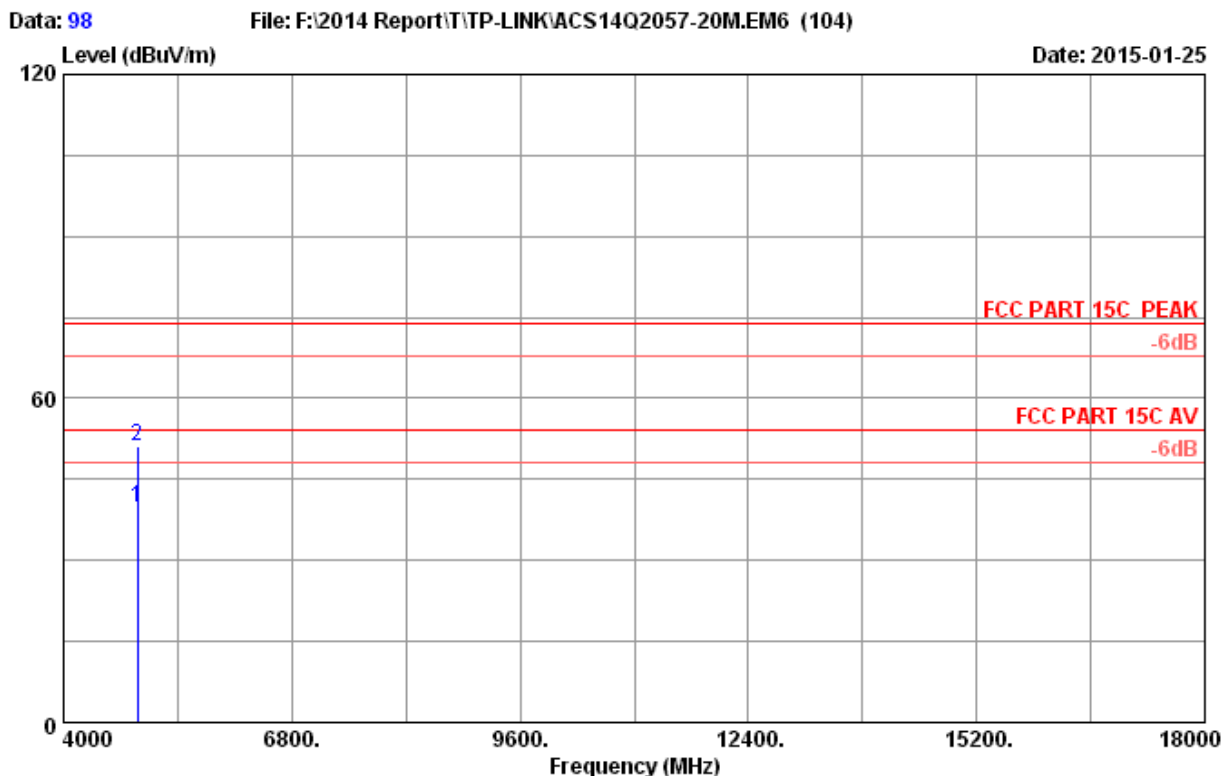

Site no. : 3m Chamber Data no. : 98
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2452MHz Tx
 M/N : CPE210


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4904.000	33.03	8.66	35.70	33.74	39.73	54.00	14.27	Average
2	4904.000	33.03	8.66	35.70	45.22	51.21	74.00	22.79	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

Data: 103

File: F:\2014 Report\TTP-LINK\ACS14Q2057-20MEM6 (104)


Date: 2015-01-25

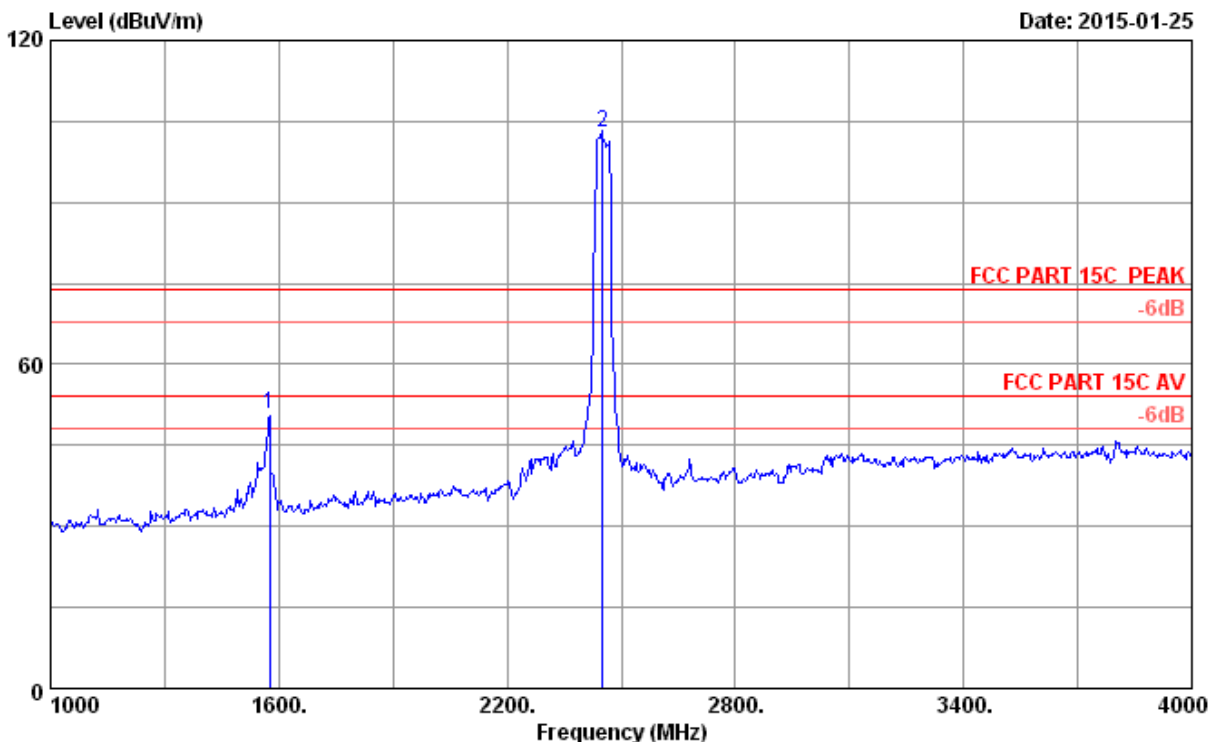

Site no. : 3m Chamber Data no. : 103
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2452MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	56.82	50.77	74.00	23.23	Peak
2	2452.000	28.29	5.87	35.70	104.54	103.00	74.00	-29.00	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

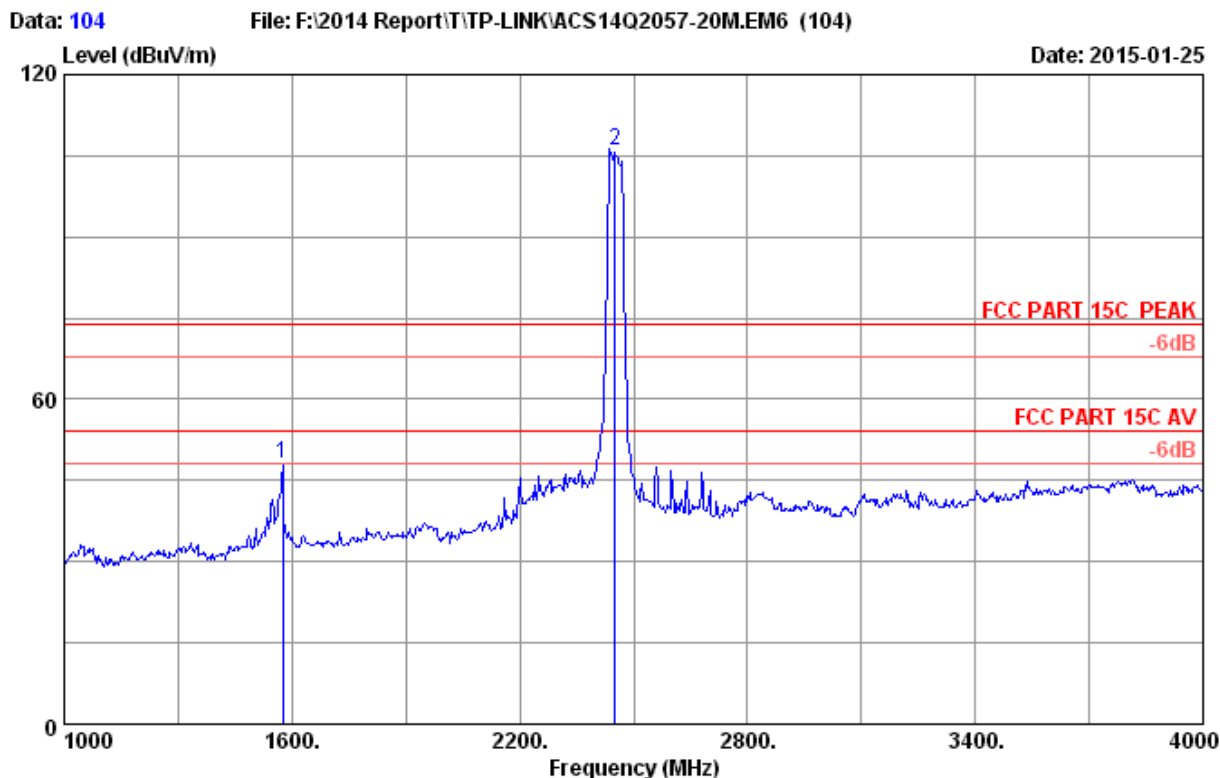

Site no. : 3m Chamber Data no. : 104
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2452MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1576.000	25.52	4.60	36.17	54.28	48.23	74.00	25.77	Peak
2	2452.000	28.29	5.87	35.70	107.47	105.93	74.00	-31.93	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

5. BAND EDGE COMPLIANCE TEST

5.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	E4446A	US44300459	Apr. 28,14	1 Year
2.	Amp	HP	8449B	3008A02495	Apr. 28,14	1 Year
3.	Horn Antenna	EMCO	3115	9510-4580	May.28, 13	1 Year
4.	HF Cable	Hubersuhner	Sucoflex104	274094/4	Apr. 28,14	1 Year
5	RF Cable	Hubersuhner	Sucoflex102	28610/2	Apr. 28,14	1 Year

5.2. Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

5.3. Test Produce

1. The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=1MHz; VBW=3MHz; Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz; VBW=10Hz; Sweep=AUTO

5.4. Test Results


Pass (The testing data was attached in the next pages.)

5MHz

Data: 3

File: F:\2014 Report\T\TP-LINK\ACS14Q2057-5M.EM6 (78)


Date: 2015-01-25

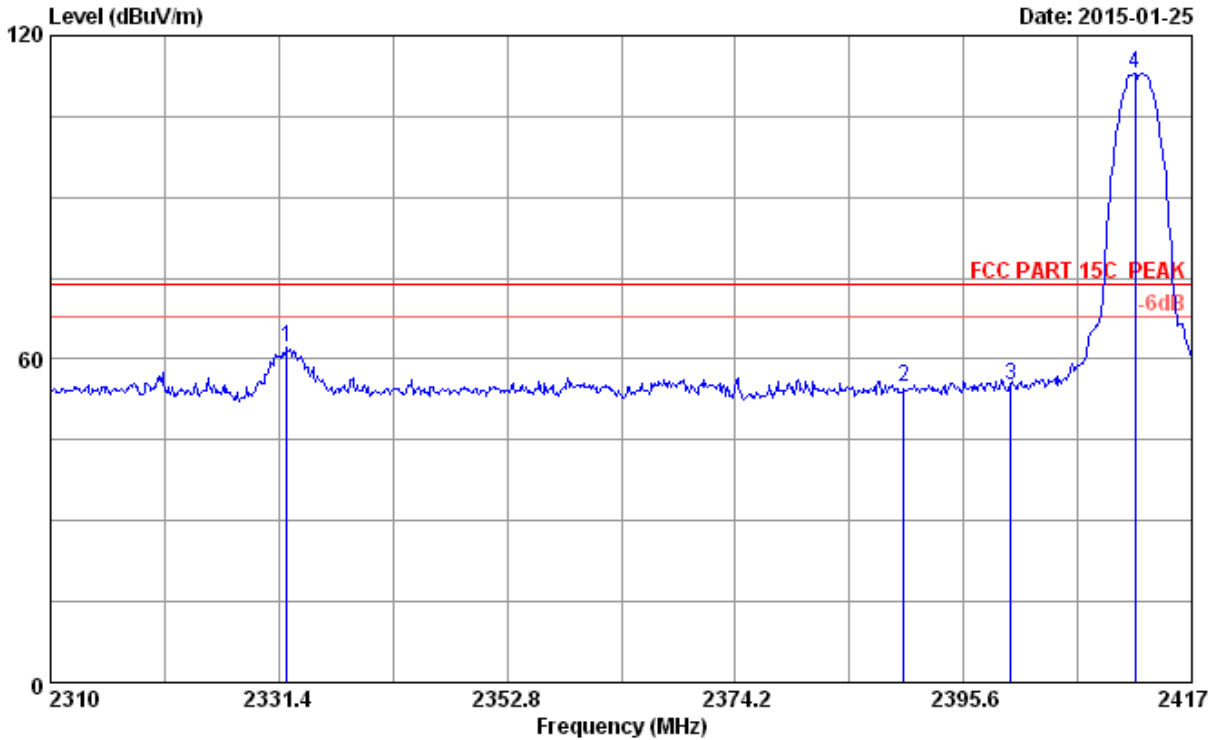

Site no. : 3m Chamber Data no. : 3
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2332.149	28.03	5.70	35.70	64.00	62.03	74.00	11.97	Peak
2	2390.000	28.16	5.78	35.70	56.48	54.72	74.00	19.28	Peak
3	2400.000	28.18	5.80	35.70	56.79	55.07	74.00	18.93	Peak
4	2411.650	28.21	5.81	35.70	114.60	112.92	74.00	-38.92	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

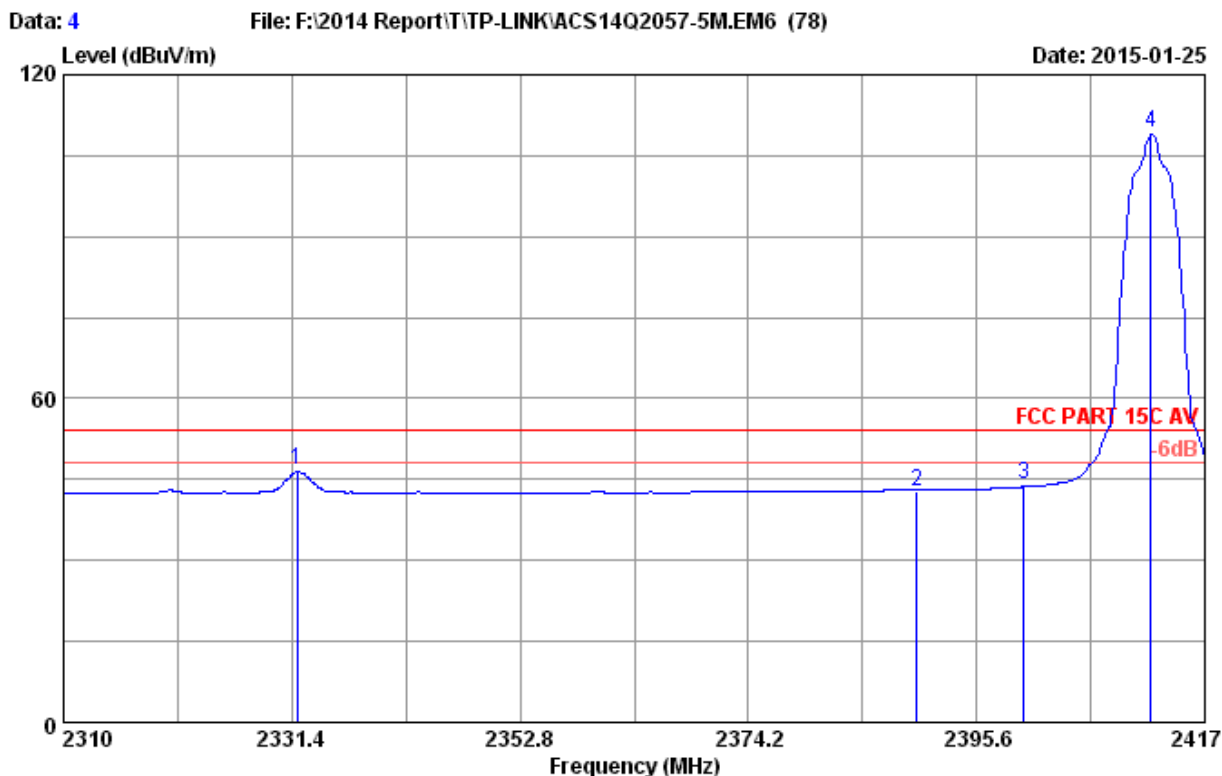

Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2331.935	28.03	5.70	35.70	48.73	46.76	54.00	7.24	Average
2	2390.000	28.16	5.78	35.70	44.69	42.93	54.00	11.07	Average
3	2400.000	28.18	5.80	35.70	45.75	44.03	54.00	9.97	Average
4	2411.971	28.21	5.81	35.70	110.96	109.28	54.00	-55.28	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

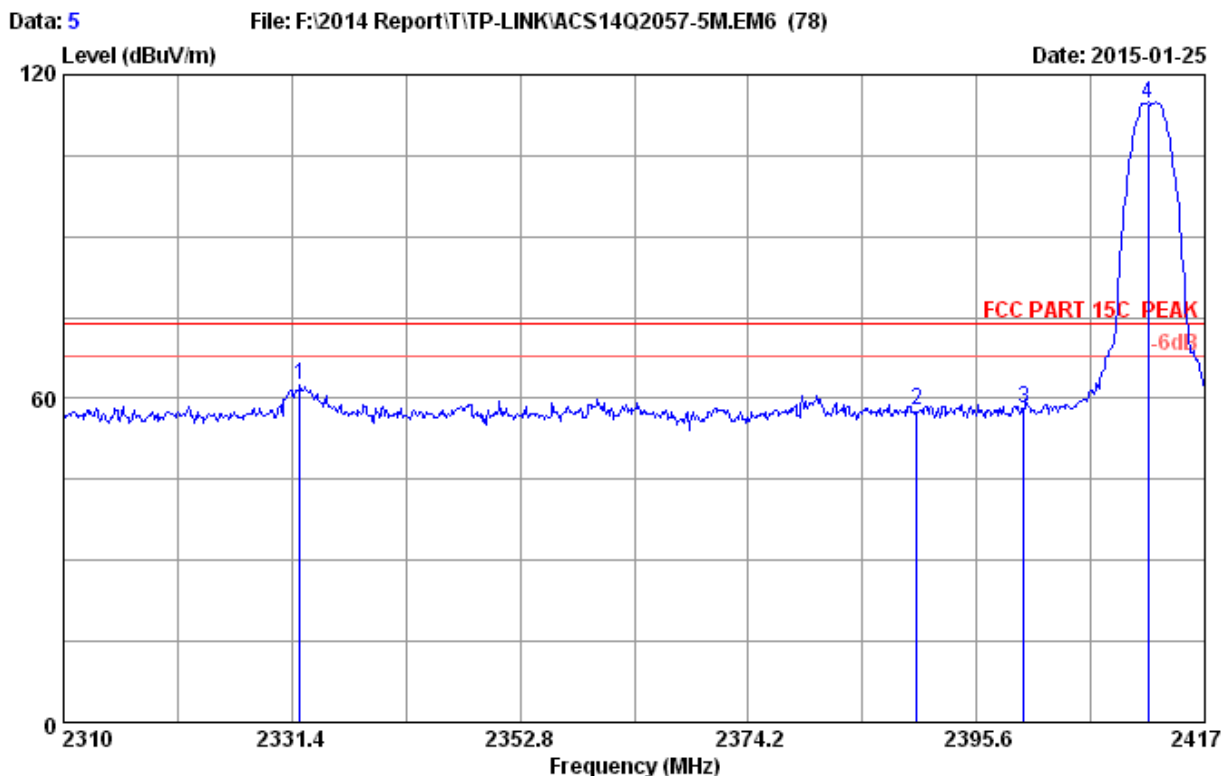

```

Site no.       : 3m Chamber                Data no.   : 5
Dis. / Ant.    : 3m 2014 3115 (4580)       Ant. pol.  : HORIZONTAL
Limit         : FCC PART 15C PEAK
Env. / Ins.    : 23*C/54%
Engineer      : Alice_Yang
EUT           : 2.4GHz 300Mbps 9dBi Outdoor CPE
Power rating  : DC 24V From POE Input AC 120V/60Hz
Test Mode     : IEEE802.11b 2412MHz Tx
M/N           : CPE210
    
```


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2332.149	28.03	5.70	35.70	64.32	62.35	74.00	11.65	Peak
2	2390.000	28.16	5.78	35.70	59.42	57.66	74.00	16.34	Peak
3	2400.000	28.18	5.80	35.70	59.81	58.09	74.00	15.91	Peak
4	2411.650	28.21	5.81	35.70	116.41	114.73	74.00	-40.73	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

Data: 6

File: F:\2014 Report\T\TP-LINK\ACS14Q2057-5M.EM6 (78)


Date: 2015-01-25

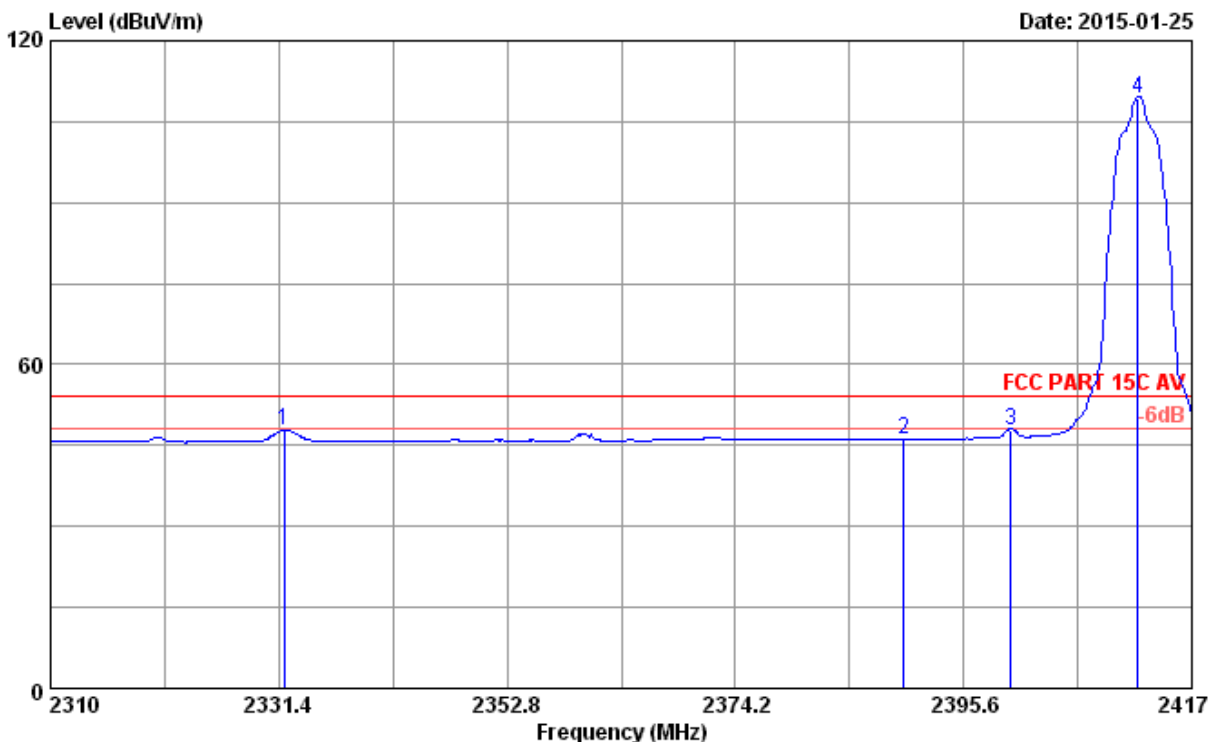

Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2331.935	28.03	5.70	35.70	49.80	47.83	54.00	6.17	Average
2	2390.000	28.16	5.78	35.70	47.82	46.06	54.00	7.94	Average
3	2400.000	28.18	5.80	35.70	49.56	47.84	54.00	6.16	Average
4	2411.971	28.21	5.81	35.70	111.01	109.33	54.00	-55.33	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

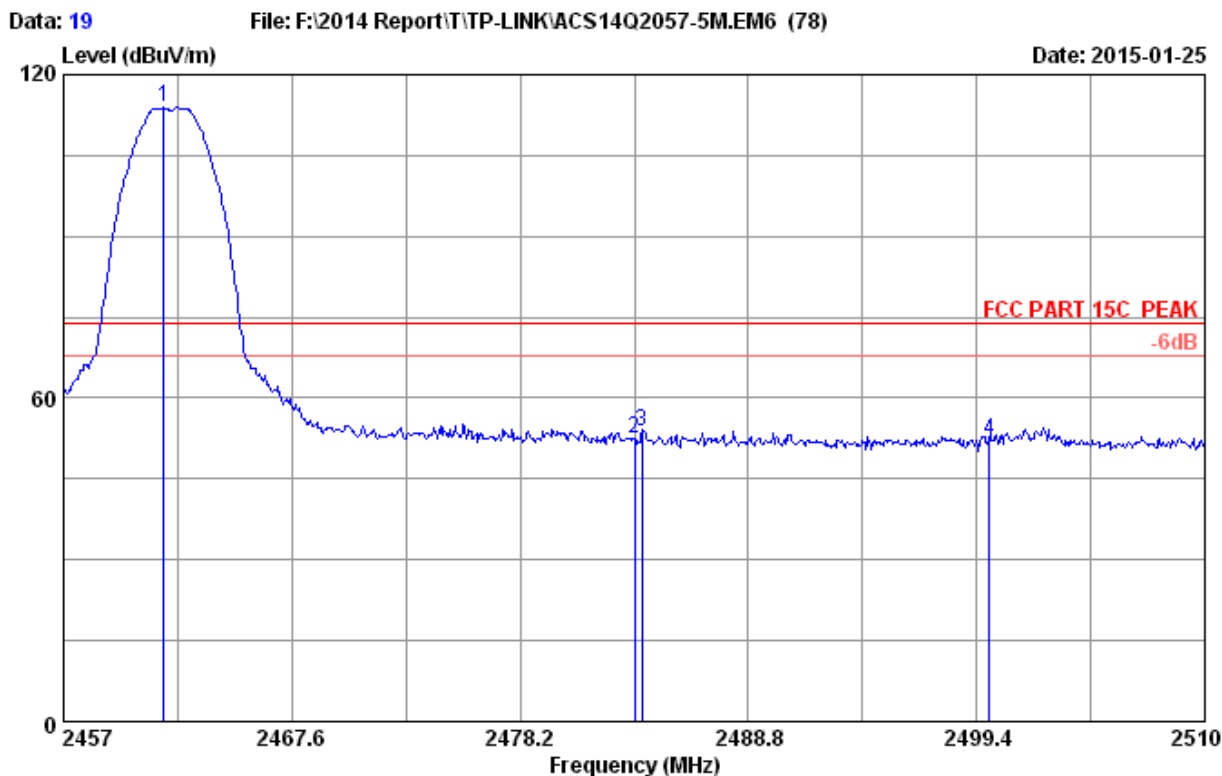

Site no. : 3m Chamber Data no. : 19
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2461.664	28.32	5.89	35.70	115.46	113.97	74.00	-39.97	Peak
2	2483.500	28.36	5.92	35.70	53.84	52.42	74.00	21.58	Peak
3	2483.871	28.36	5.92	35.70	55.26	53.84	74.00	20.16	Peak
4	2500.000	28.40	5.94	35.70	53.64	52.28	74.00	21.72	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

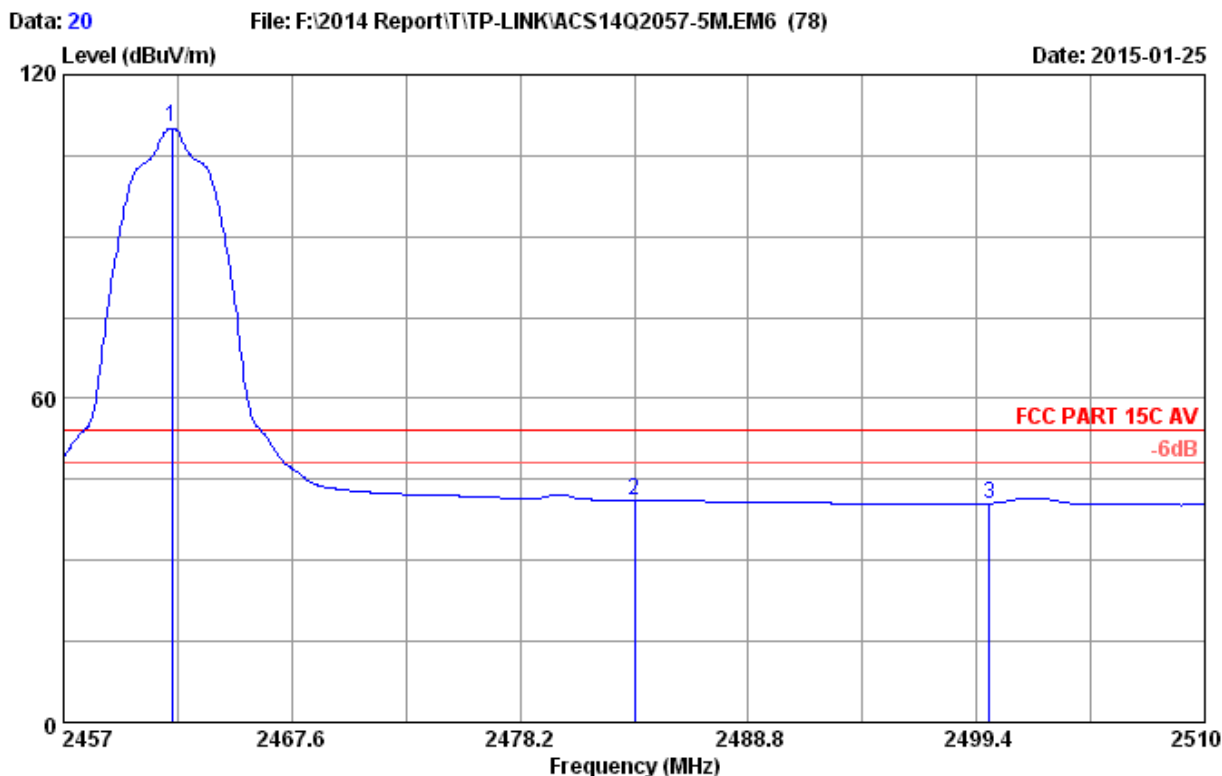

Site no. : 3m Chamber Data no. : 20
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.035	28.32	5.89	35.70	111.77	110.28	54.00	-56.28	Average
2	2483.500	28.36	5.92	35.70	42.49	41.07	54.00	12.93	Average
3	2500.000	28.40	5.94	35.70	41.85	40.49	54.00	13.51	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

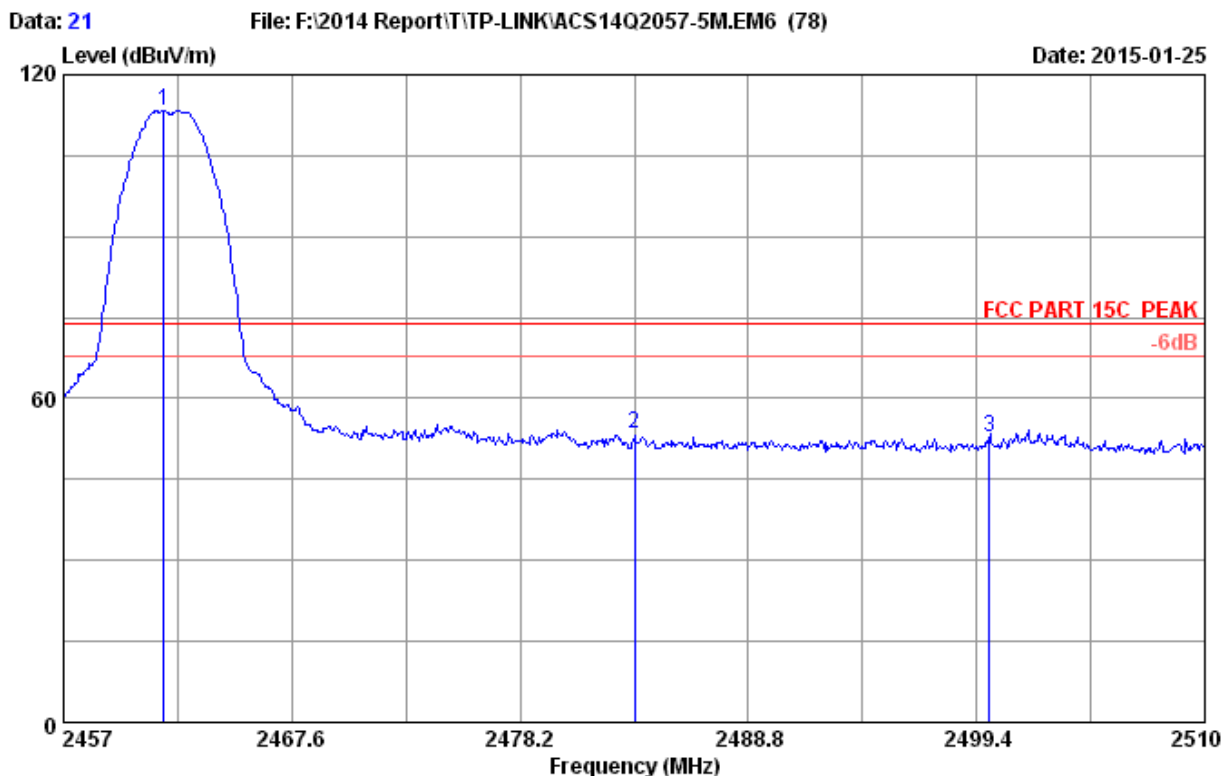

Site no. : 3m Chamber Data no. : 21
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2461.664	28.32	5.89	35.70	114.74	113.25	74.00	-39.25	Peak
2	2483.500	28.36	5.92	35.70	54.76	53.34	74.00	20.66	Peak
3	2500.000	28.40	5.94	35.70	54.23	52.87	74.00	21.13	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

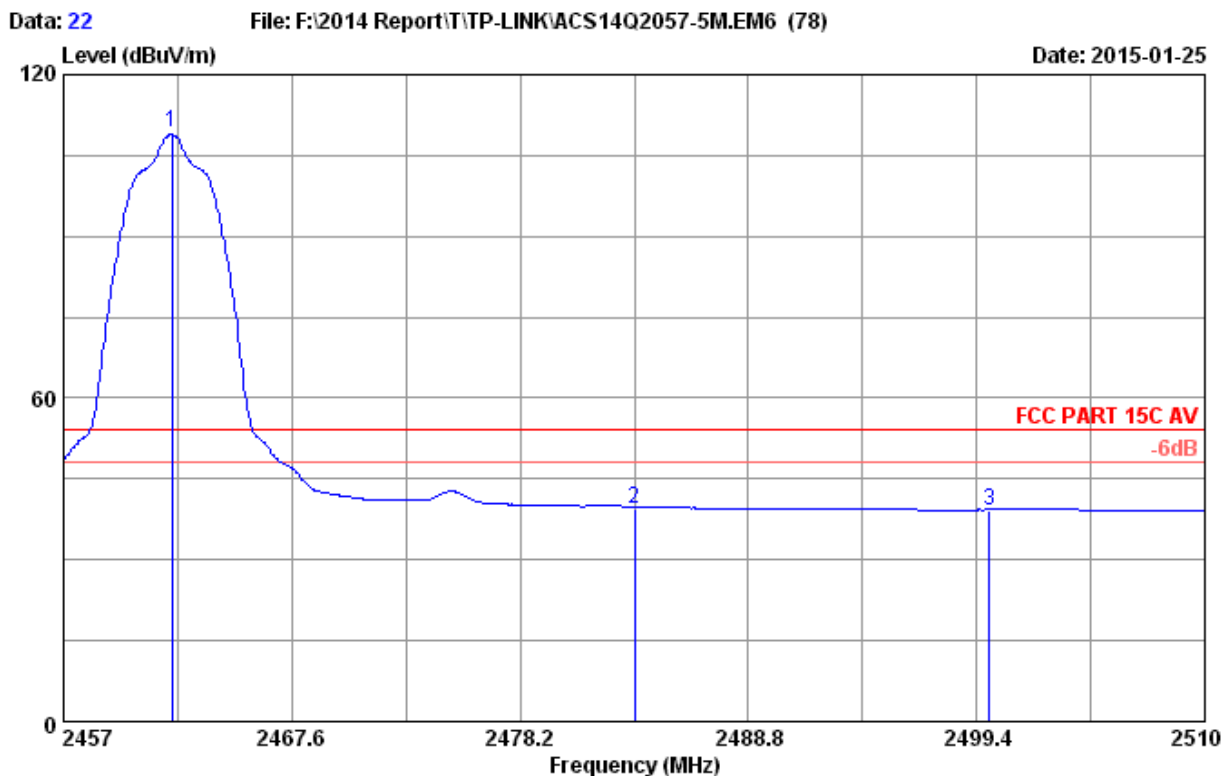

Site no. : 3m Chamber Data no. : 22
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.035	28.32	5.89	35.70	110.74	109.25	54.00	-55.25	Average
2	2483.500	28.36	5.92	35.70	41.02	39.60	54.00	14.40	Average
3	2500.000	28.40	5.94	35.70	40.54	39.18	54.00	14.82	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

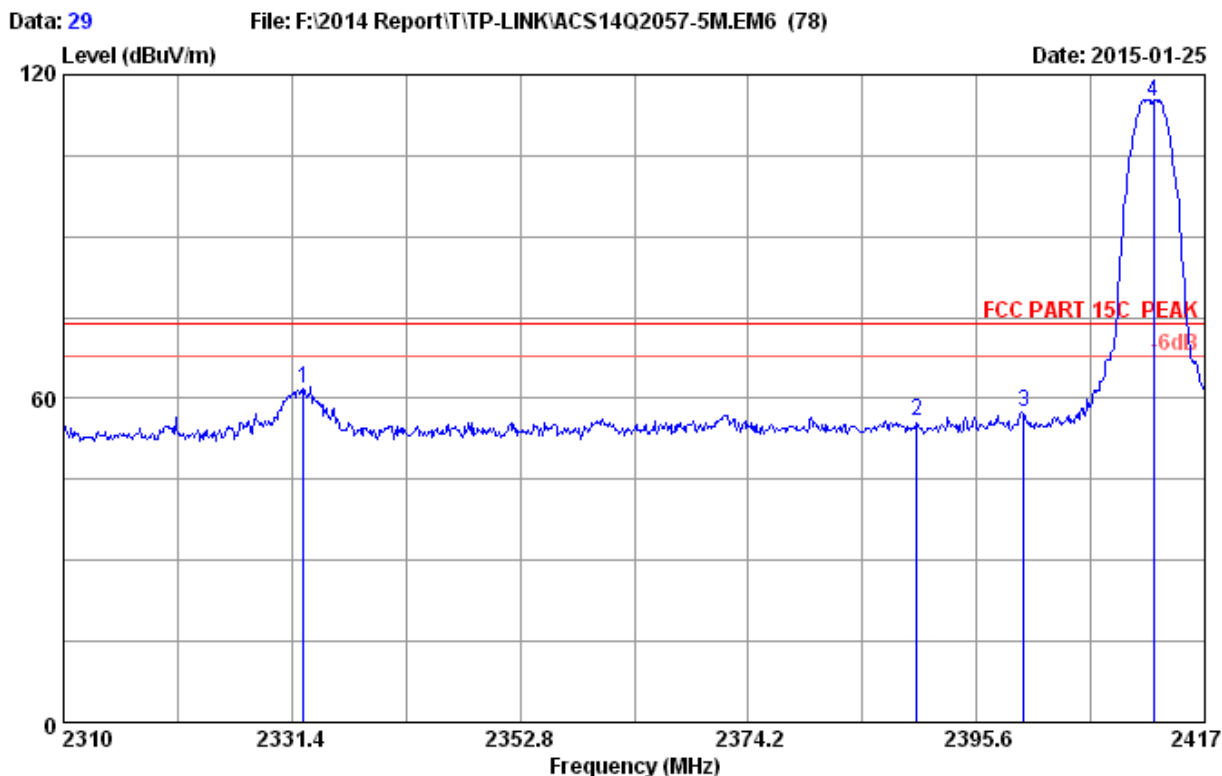

Site no. : 3m Chamber Data no. : 29
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2332.470	28.03	5.70	35.70	63.73	61.76	74.00	12.24	Peak
2	2390.000	28.16	5.78	35.70	57.48	55.72	74.00	18.28	Peak
3	2400.000	28.18	5.80	35.70	59.34	57.62	74.00	16.38	Peak
4	2412.185	28.21	5.81	35.70	116.72	115.04	74.00	-41.04	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

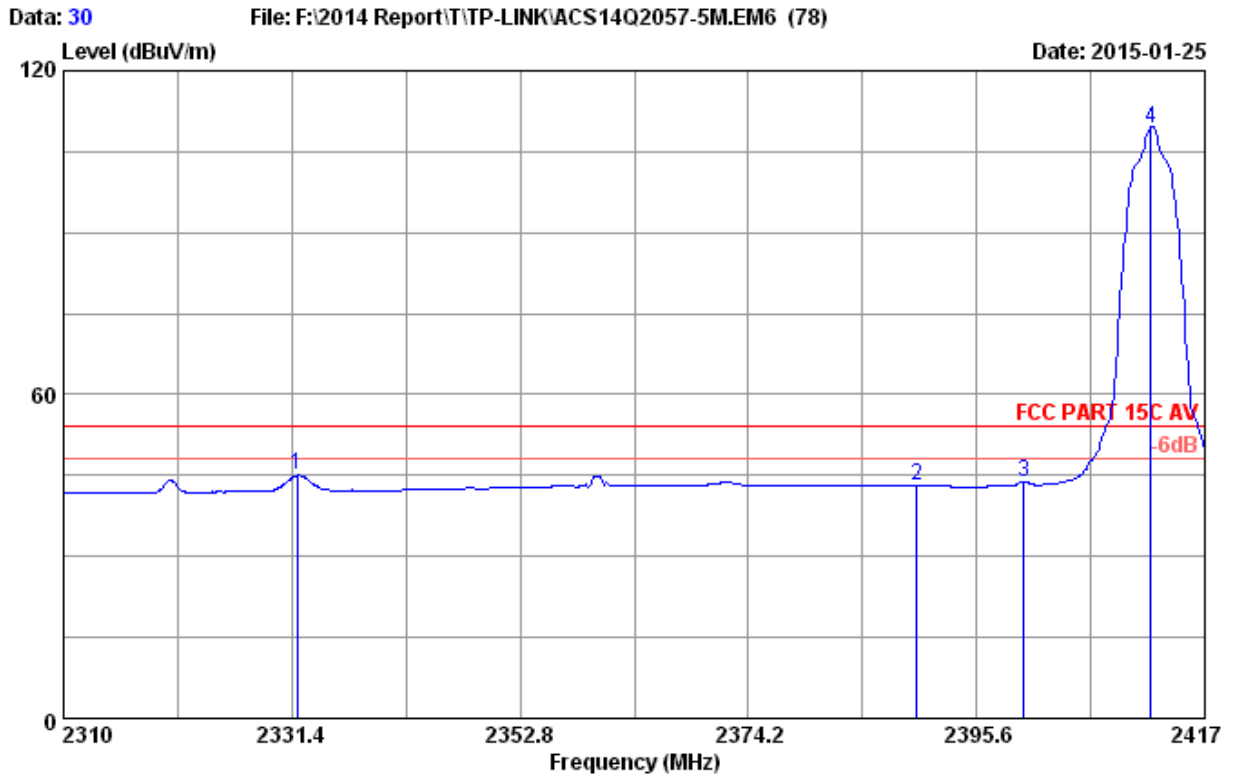

Site no. : 3m Chamber Data no. : 30
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2331.935	28.03	5.70	35.70	46.95	44.98	54.00	9.02	Average
2	2390.000	28.16	5.78	35.70	44.75	42.99	54.00	11.01	Average
3	2400.000	28.18	5.80	35.70	45.62	43.90	54.00	10.10	Average
4	2411.971	28.21	5.81	35.70	110.96	109.28	54.00	-55.28	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

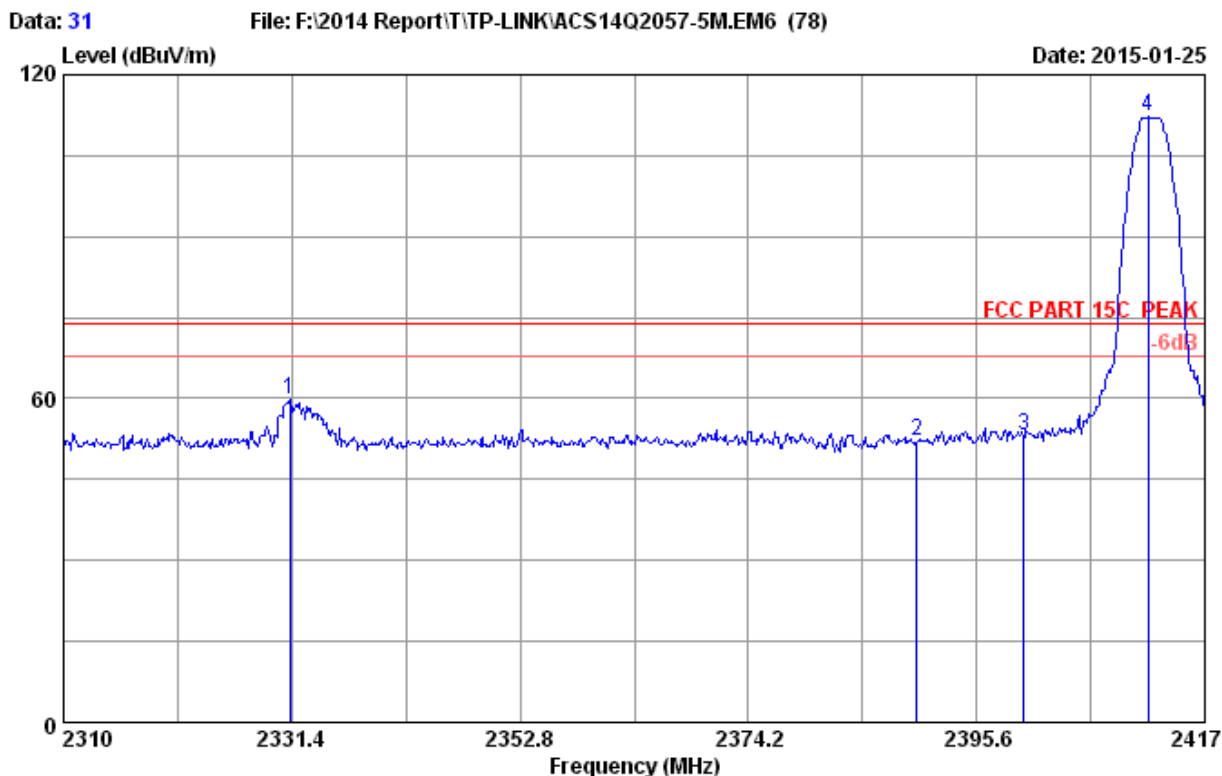

Site no. : 3m Chamber Data no. : 31
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2331.186	28.03	5.70	35.70	61.77	59.80	74.00	14.20	Peak
2	2390.000	28.16	5.78	35.70	53.84	52.08	74.00	21.92	Peak
3	2400.000	28.18	5.80	35.70	54.88	53.16	74.00	20.84	Peak
4	2411.650	28.21	5.81	35.70	113.84	112.16	74.00	-38.16	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

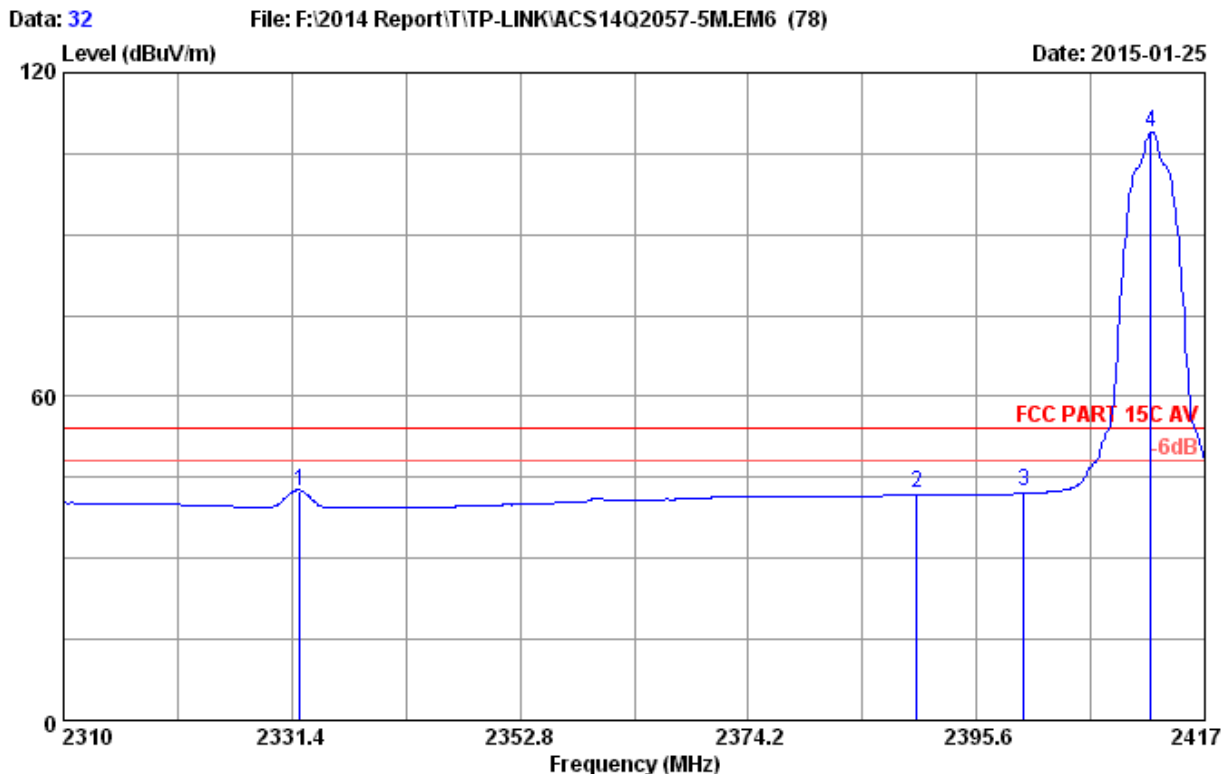

Site no. : 3m Chamber Data no. : 32
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2332.149	28.03	5.70	35.70	44.58	42.61	54.00	11.39	Average
2	2390.000	28.16	5.78	35.70	43.95	42.19	54.00	11.81	Average
3	2400.000	28.18	5.80	35.70	44.26	42.54	54.00	11.46	Average
4	2411.971	28.21	5.81	35.70	110.56	108.88	54.00	-54.88	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

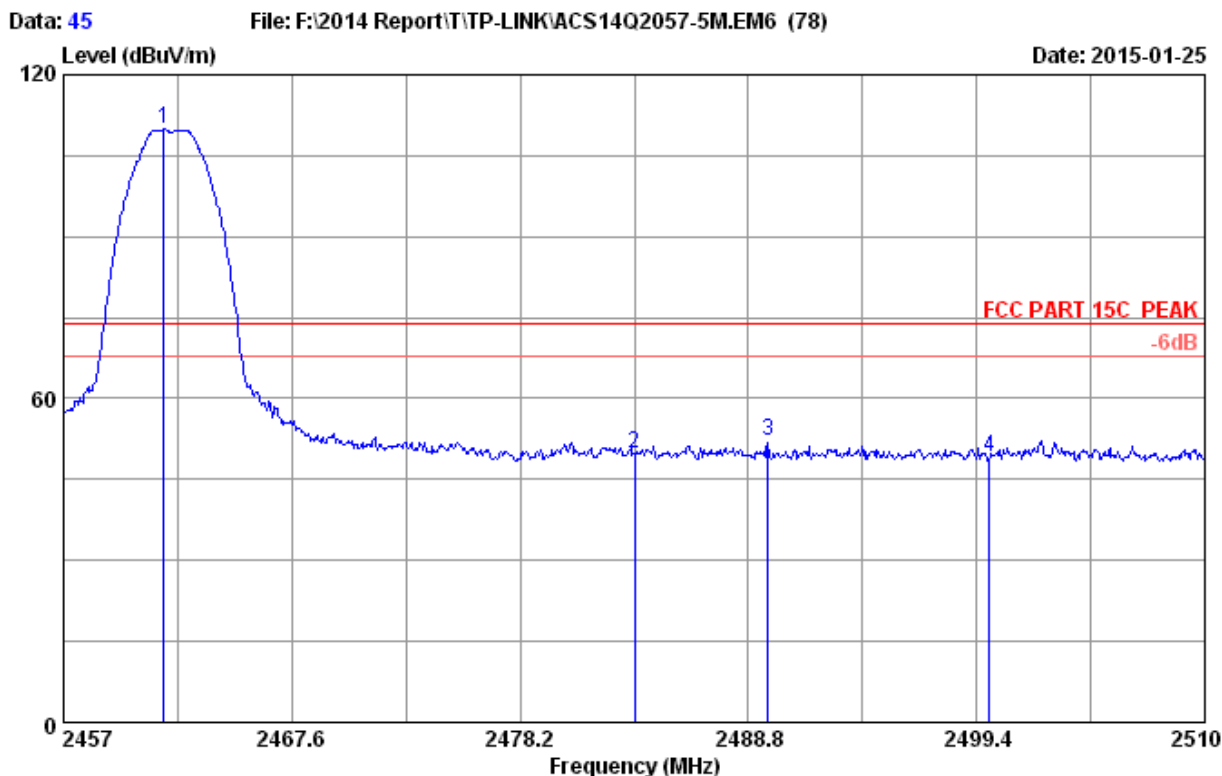

Site no. : 3m Chamber Data no. : 45
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2461.664	28.32	5.89	35.70	111.53	110.04	74.00	-36.04	Peak
2	2483.500	28.36	5.92	35.70	51.33	49.91	74.00	24.09	Peak
3	2489.701	28.38	5.93	35.70	53.45	52.06	74.00	21.94	Peak
4	2500.000	28.40	5.94	35.70	50.36	49.00	74.00	25.00	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

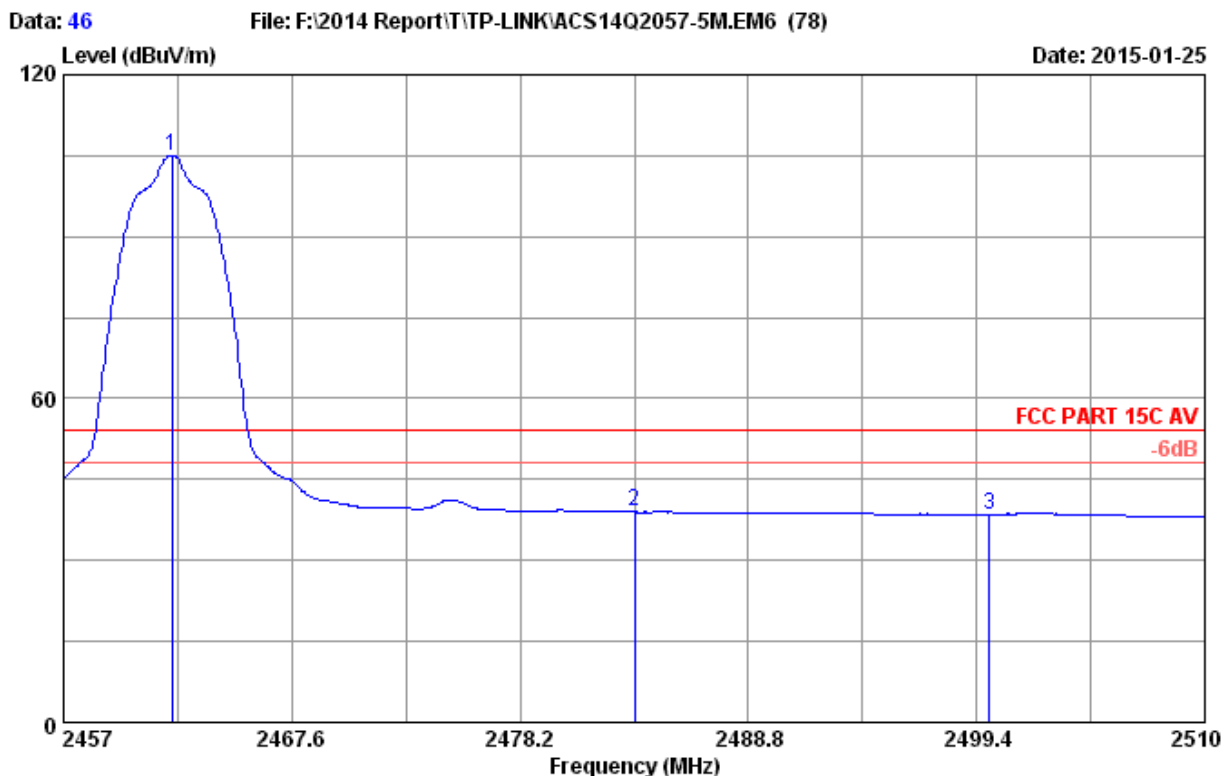

Site no. : 3m Chamber Data no. : 46
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.035	28.32	5.89	35.70	106.57	105.08	54.00	-51.08	Average
2	2483.500	28.36	5.92	35.70	40.36	38.94	54.00	15.06	Average
3	2500.000	28.40	5.94	35.70	39.72	38.36	54.00	15.64	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

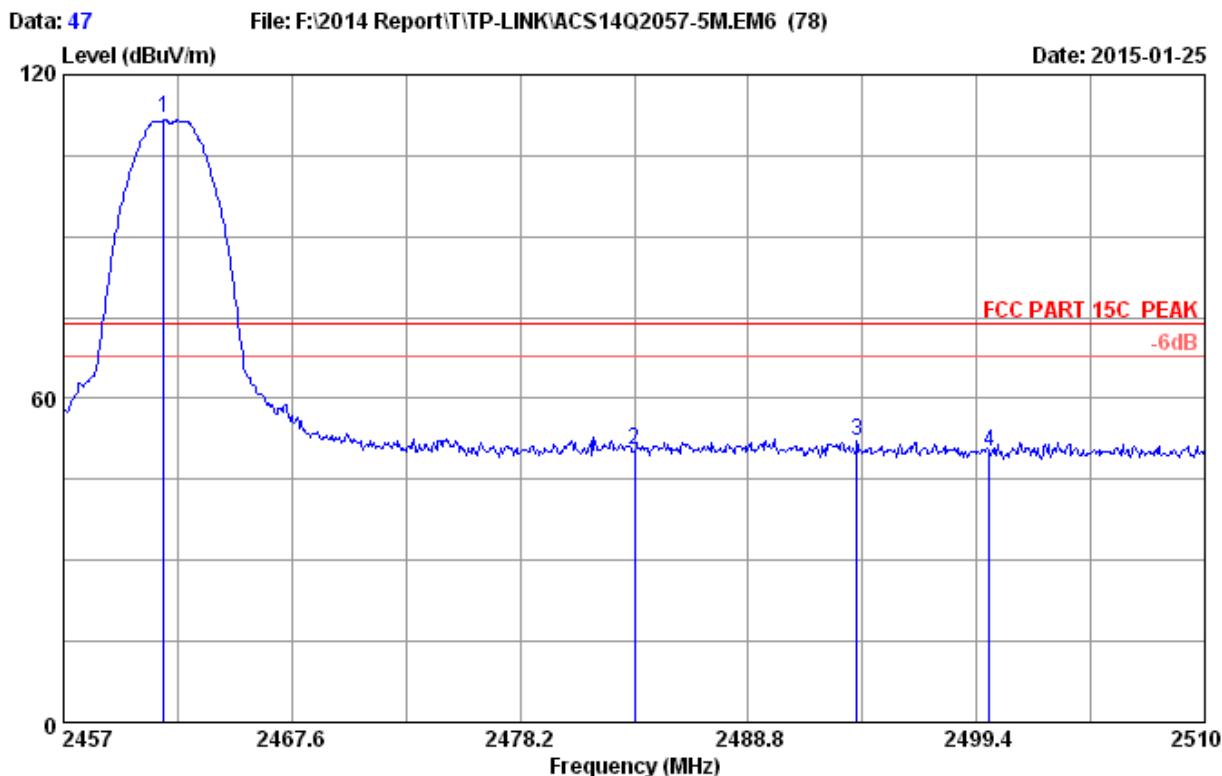

Site no. : 3m Chamber Data no. : 47
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2461.664	28.32	5.89	35.70	113.58	112.09	74.00	-38.09	Peak
2	2483.500	28.36	5.92	35.70	51.79	50.37	74.00	23.63	Peak
3	2493.835	28.39	5.93	35.70	53.58	52.20	74.00	21.80	Peak
4	2500.000	28.40	5.94	35.70	51.65	50.29	74.00	23.71	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

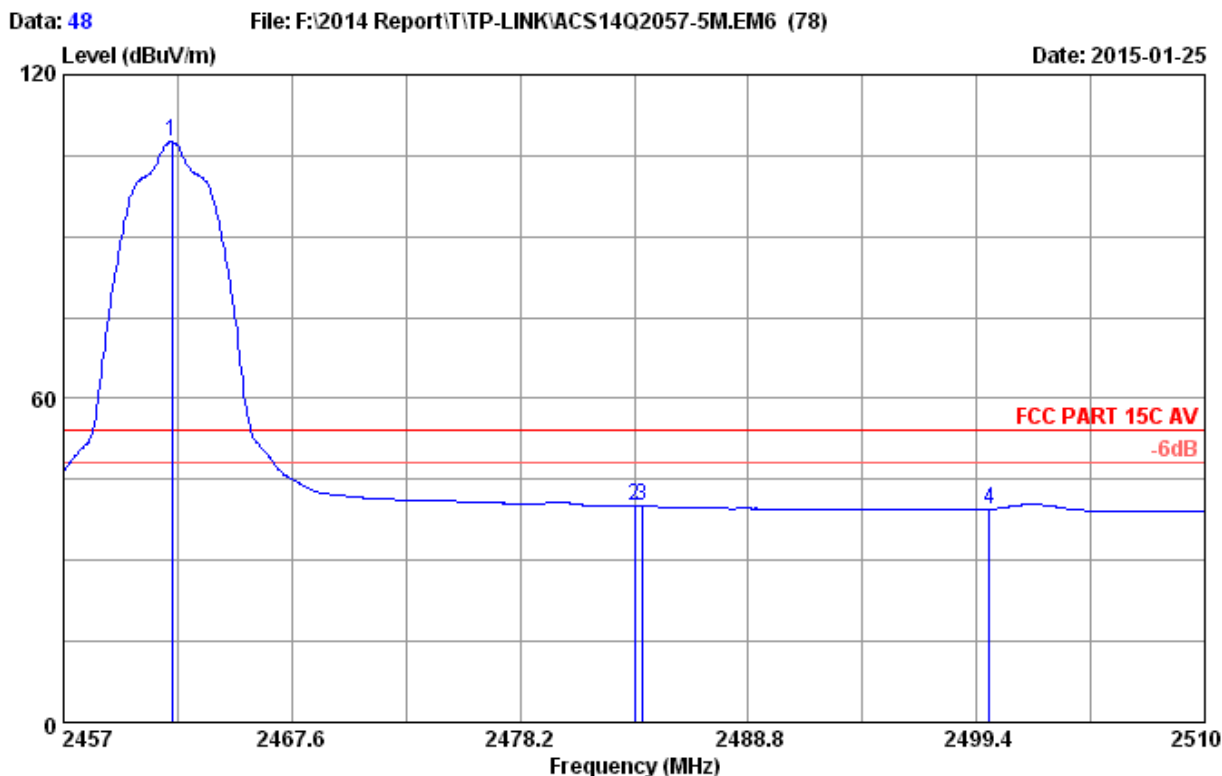

Site no. : 3m Chamber Data no. : 48
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.035	28.32	5.89	35.70	109.00	107.51	54.00	-53.51	Average
2	2483.500	28.36	5.92	35.70	41.40	39.98	54.00	14.02	Average
3	2483.871	28.36	5.92	35.70	41.38	39.96	54.00	14.04	Average
4	2500.000	28.40	5.94	35.70	40.77	39.41	54.00	14.59	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

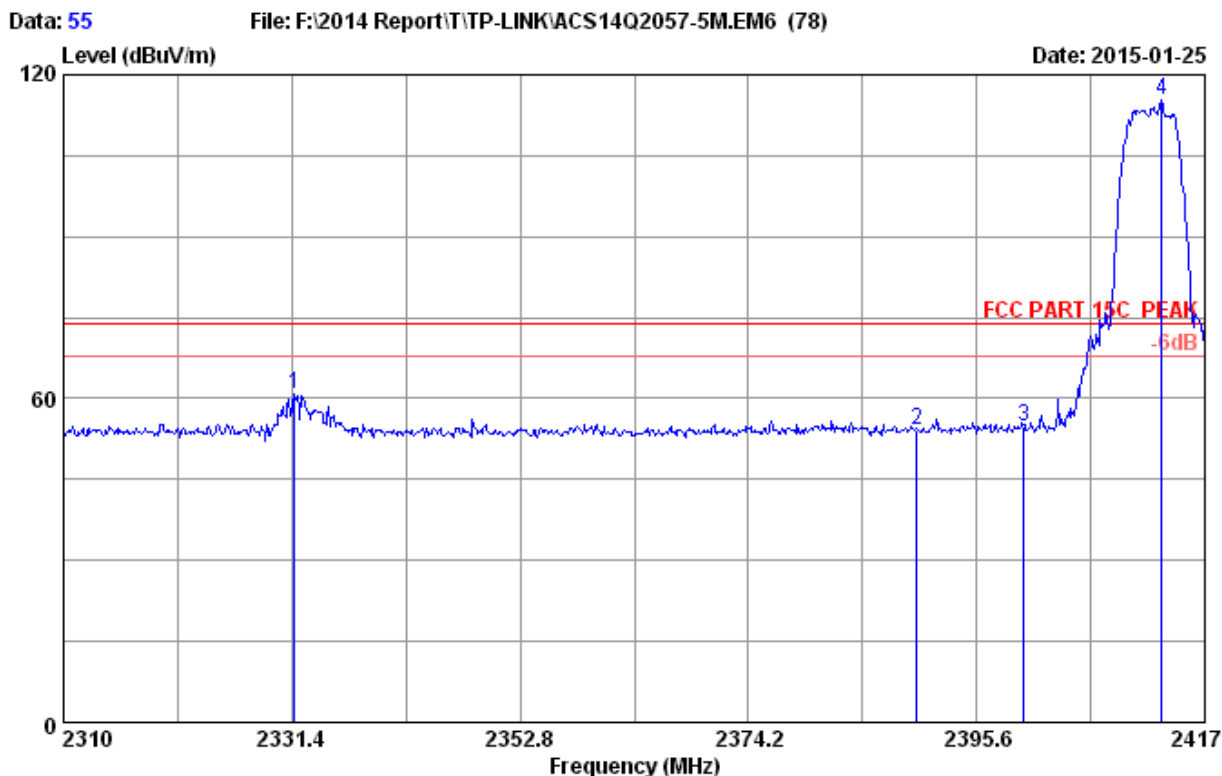

Site no. : 3m Chamber Data no. : 55
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2331.614	28.03	5.70	35.70	62.71	60.74	74.00	13.26	Peak
2	2390.000	28.16	5.78	35.70	56.01	54.25	74.00	19.75	Peak
3	2400.000	28.18	5.80	35.70	56.49	54.77	74.00	19.23	Peak
4	2412.934	28.21	5.82	35.70	116.85	115.18	74.00	-41.18	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

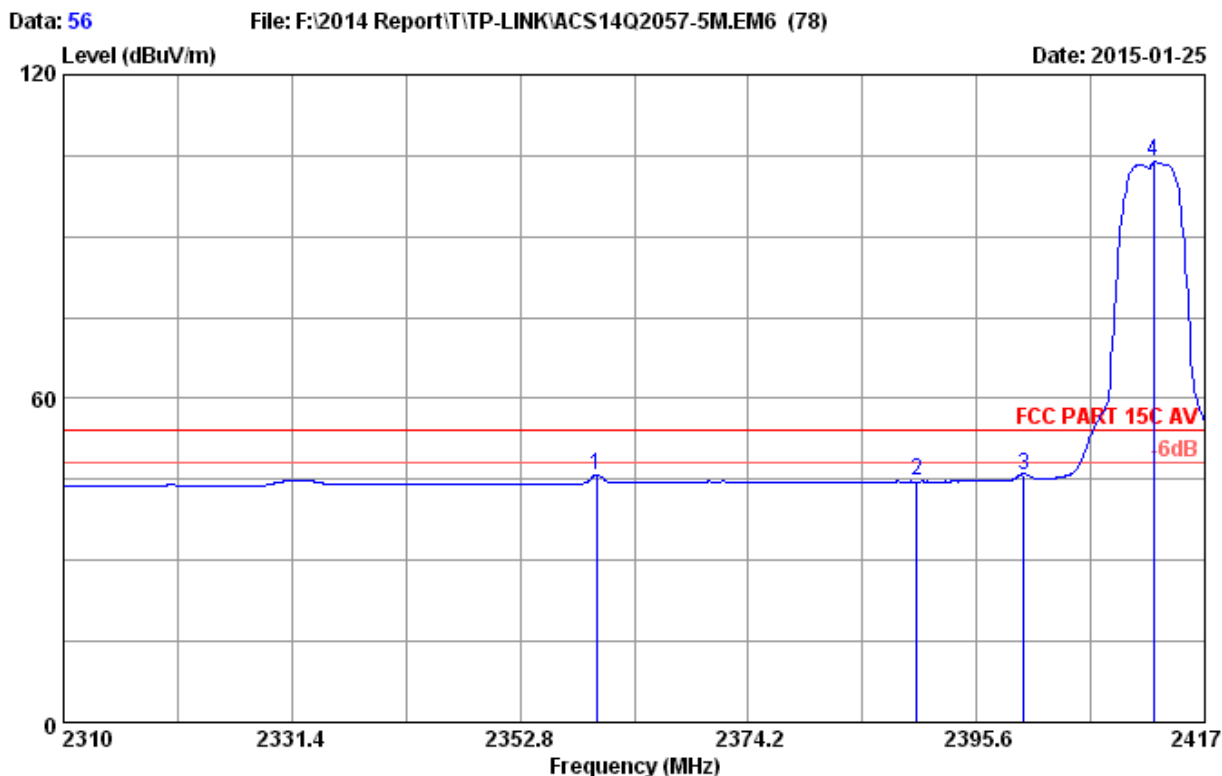

Site no. : 3m Chamber Data no. : 56
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2359.969	28.09	5.74	35.70	47.55	45.68	54.00	8.32	Average
2	2390.000	28.16	5.78	35.70	46.52	44.76	54.00	9.24	Average
3	2400.000	28.18	5.80	35.70	47.65	45.93	54.00	8.07	Average
4	2412.185	28.21	5.81	35.70	105.70	104.02	54.00	-50.02	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

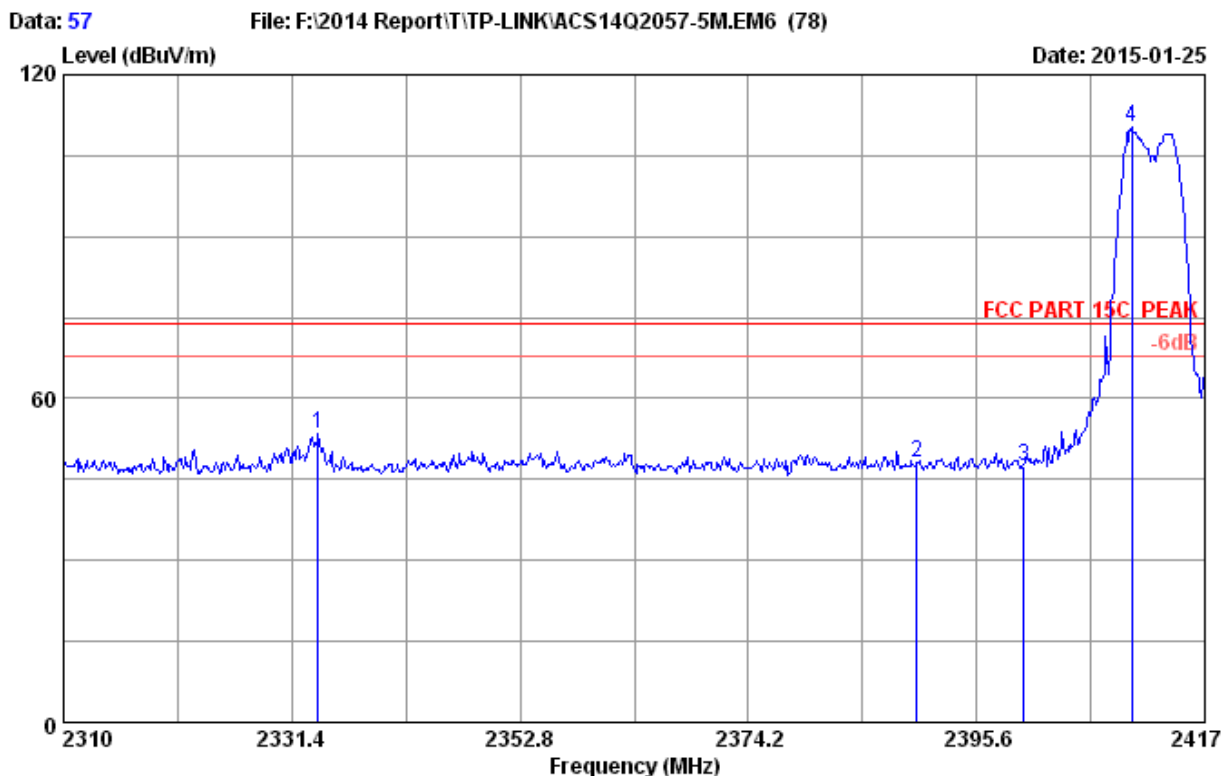

Site no. : 3m Chamber Data no. : 57
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2333.861	28.03	5.70	35.70	55.40	53.43	74.00	20.57	Peak
2	2390.000	28.16	5.78	35.70	50.03	48.27	74.00	25.73	Peak
3	2400.000	28.18	5.80	35.70	49.35	47.63	74.00	26.37	Peak
4	2410.152	28.20	5.81	35.70	111.85	110.16	74.00	-36.16	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

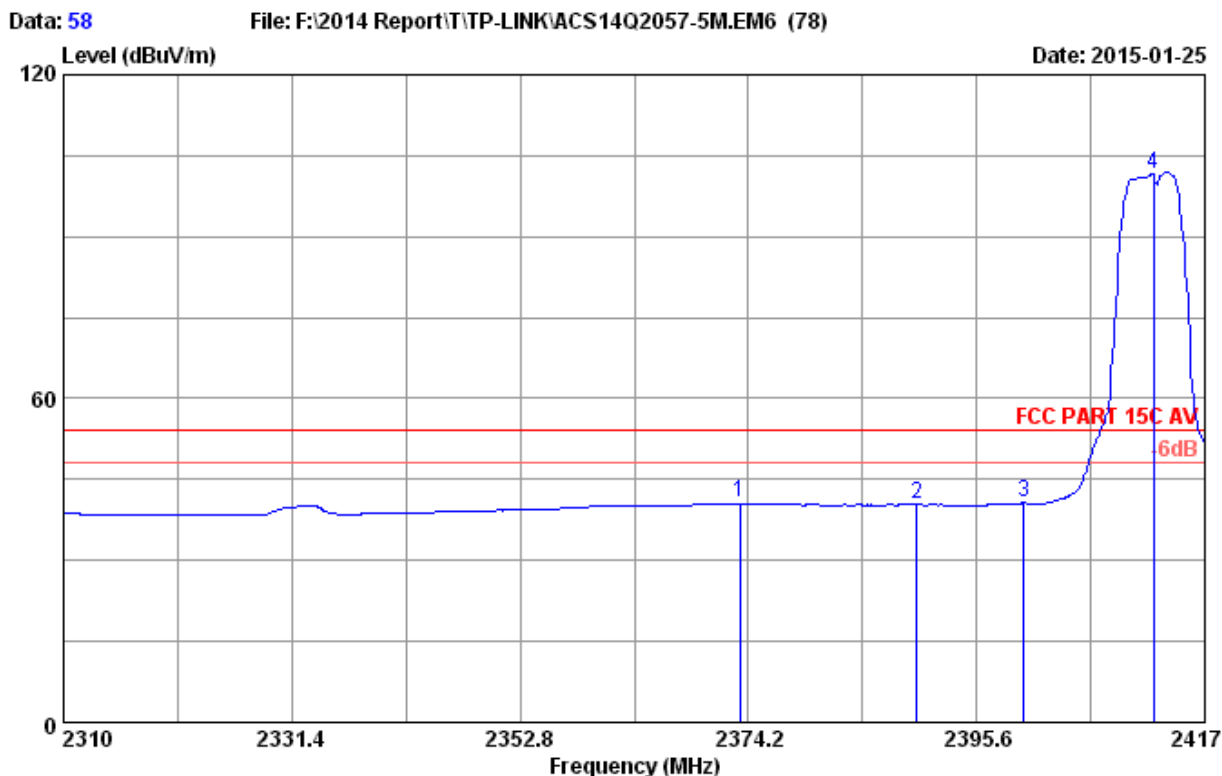

Site no. : 3m Chamber Data no. : 58
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2373.451	28.12	5.76	35.70	42.49	40.67	54.00	13.33	Average
2	2390.000	28.16	5.78	35.70	42.28	40.52	54.00	13.48	Average
3	2400.000	28.18	5.80	35.70	42.61	40.89	54.00	13.11	Average
4	2412.185	28.21	5.81	35.70	103.43	101.75	54.00	-47.75	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

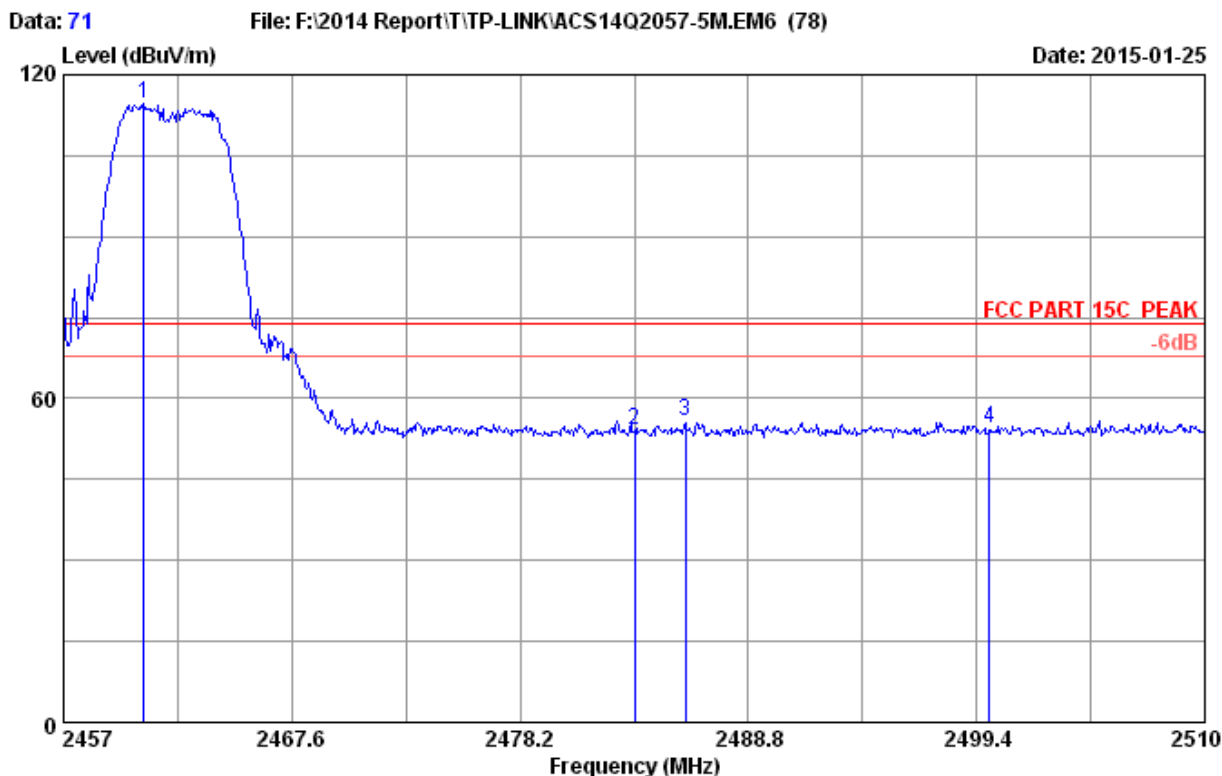

Site no. : 3m Chamber Data no. : 71
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2460.710	28.31	5.89	35.70	116.10	114.60	74.00	-40.60	Peak
2	2483.500	28.36	5.92	35.70	55.58	54.16	74.00	19.84	Peak
3	2485.885	28.37	5.92	35.70	57.12	55.71	74.00	18.29	Peak
4	2500.000	28.40	5.94	35.70	55.81	54.45	74.00	19.55	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

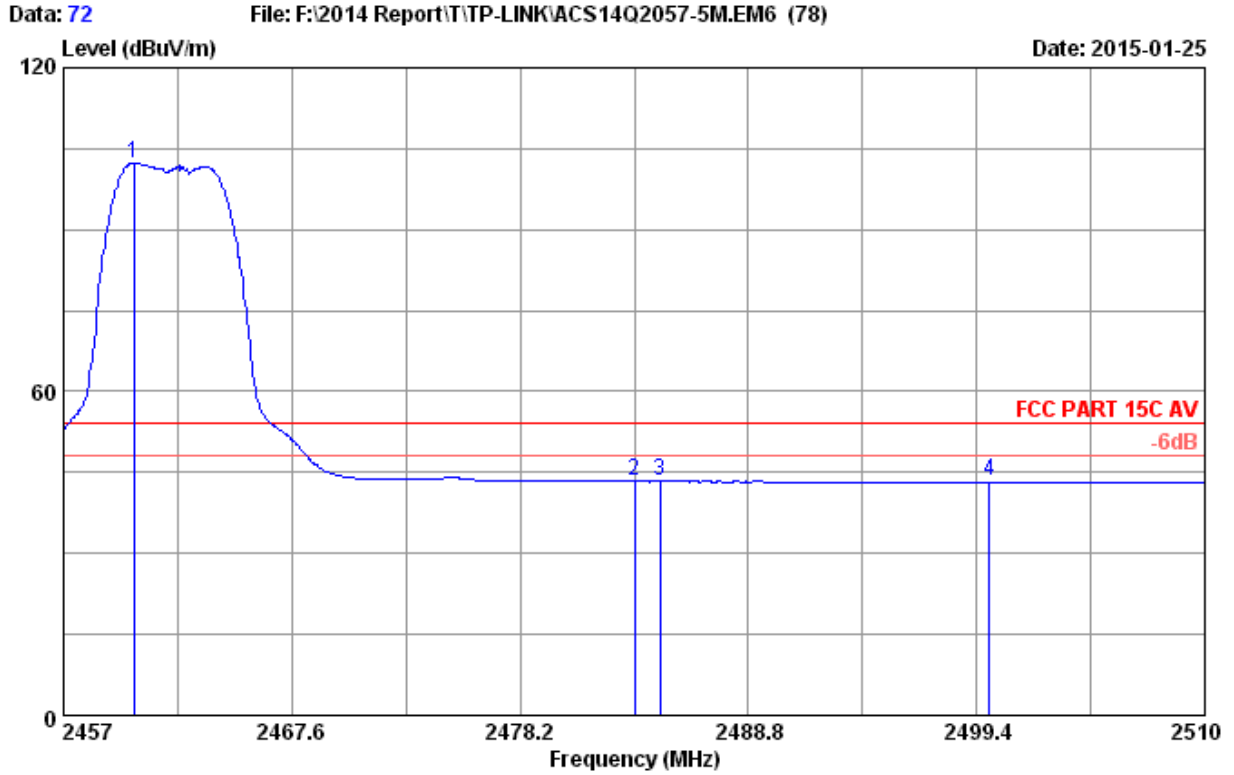

Site no. : 3m Chamber Data no. : 72
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2460.286	28.31	5.88	35.70	103.93	102.42	54.00	-48.42	Average
2	2483.500	28.36	5.92	35.70	44.72	43.30	54.00	10.70	Average
3	2484.719	28.37	5.92	35.70	44.78	43.37	54.00	10.63	Average
4	2500.000	28.40	5.94	35.70	44.83	43.47	54.00	10.53	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

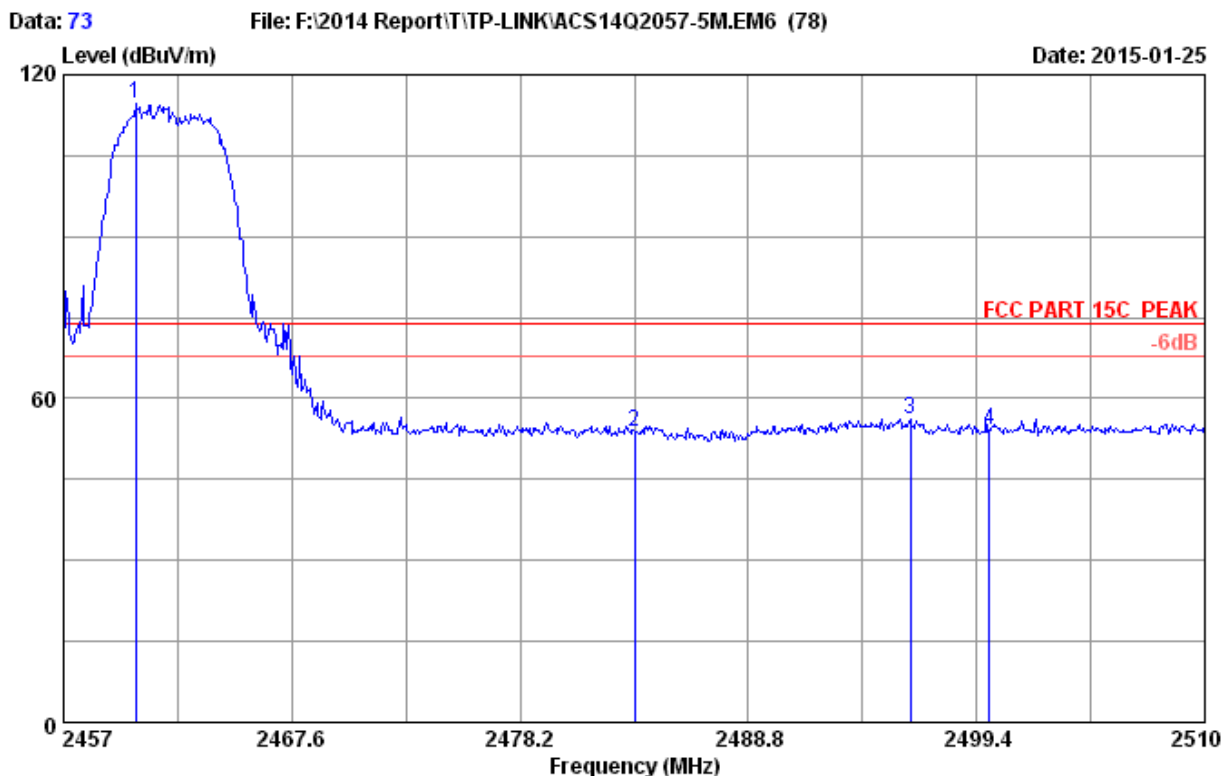

Site no. : 3m Chamber Data no. : 73
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2460.339	28.31	5.88	35.70	116.08	114.57	74.00	-40.57	Peak
2	2483.500	28.36	5.92	35.70	55.36	53.94	74.00	20.06	Peak
3	2496.326	28.39	5.94	35.70	57.52	56.15	74.00	17.85	Peak
4	2500.000	28.40	5.94	35.70	55.46	54.10	74.00	19.90	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

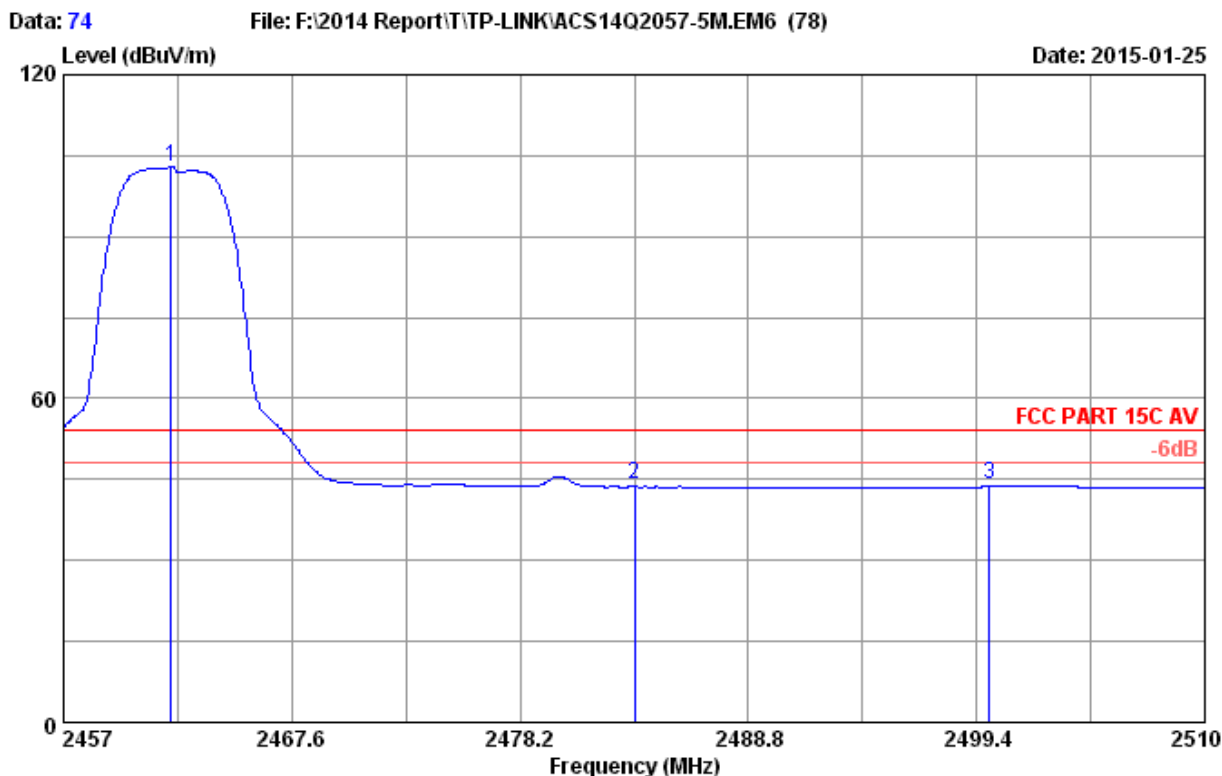

Site no. : 3m Chamber Data no. : 74
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2461.982	28.32	5.89	35.70	104.30	102.81	54.00	-48.81	Average
2	2483.500	28.36	5.92	35.70	45.48	44.06	54.00	9.94	Average
3	2500.000	28.40	5.94	35.70	45.46	44.10	54.00	9.90	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

10MHz

Data: 3

File: F:\2014 Report\T\TP-LINK\ACS14Q2057-10M.EM6 (78)


Date: 2015-01-25

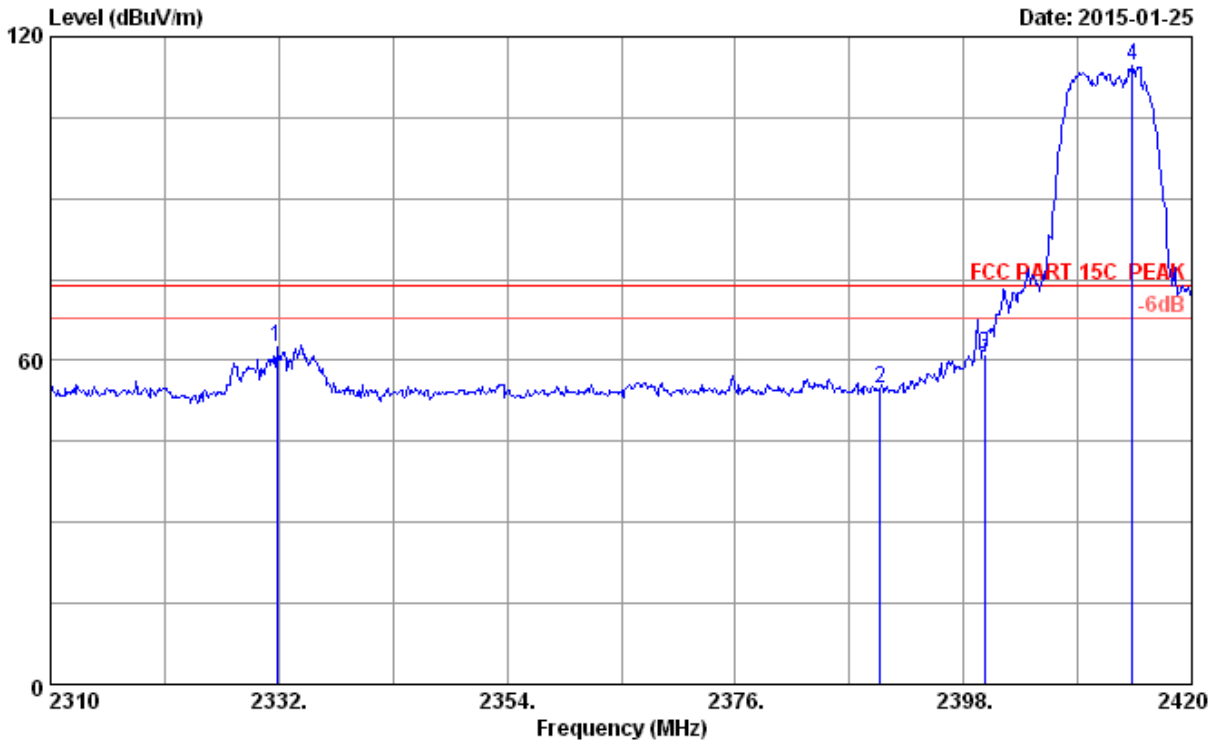

Site no. : 3m Chamber Data no. : 3
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2331.780	28.03	5.70	35.70	64.47	62.50	74.00	11.50	Peak
2	2390.000	28.16	5.78	35.70	56.72	54.96	74.00	19.04	Peak
3	2400.000	28.18	5.80	35.70	62.97	61.25	74.00	12.75	Peak
4	2414.280	28.21	5.82	35.70	116.36	114.69	74.00	-40.69	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

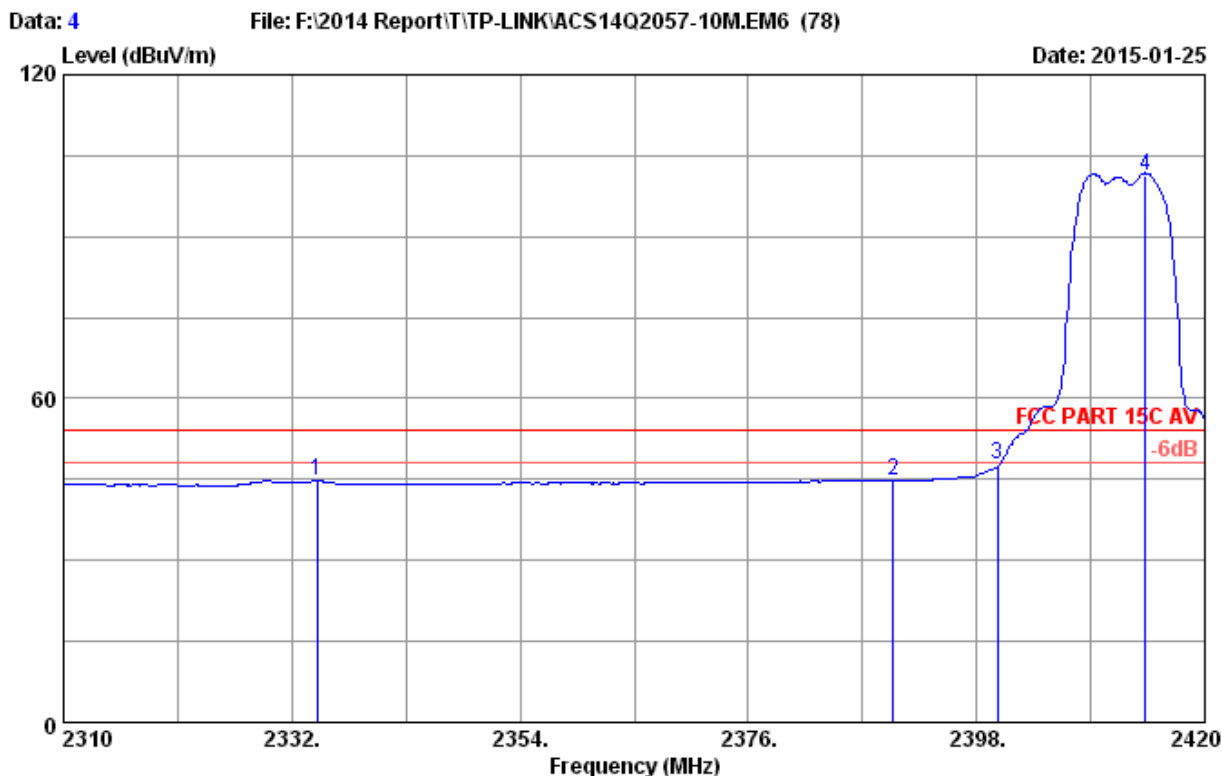

Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2334.420	28.04	5.70	35.70	46.64	44.68	54.00	9.32	Average
2	2389.970	28.16	5.78	35.70	46.60	44.84	54.00	9.16	Average
3	2400.000	28.18	5.80	35.70	49.51	47.79	54.00	6.21	Average
4	2414.280	28.21	5.82	35.70	102.99	101.32	54.00	-47.32	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

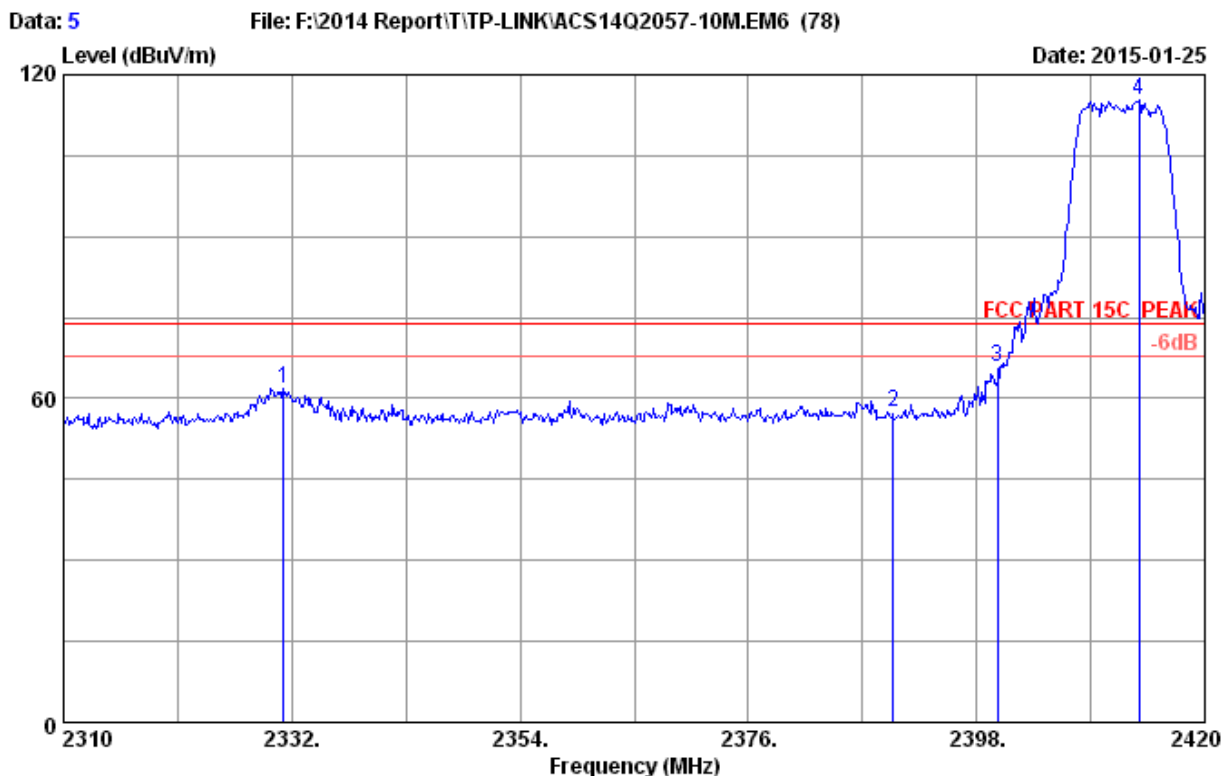

Site no. : 3m Chamber Data no. : 5
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2331.230	28.03	5.70	35.70	63.98	62.01	74.00	11.99	Peak
2	2390.000	28.16	5.78	35.70	59.13	57.37	74.00	16.63	Peak
3	2400.000	28.18	5.80	35.70	67.49	65.77	74.00	8.23	Peak
4	2413.620	28.21	5.82	35.70	116.99	115.32	74.00	-41.32	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

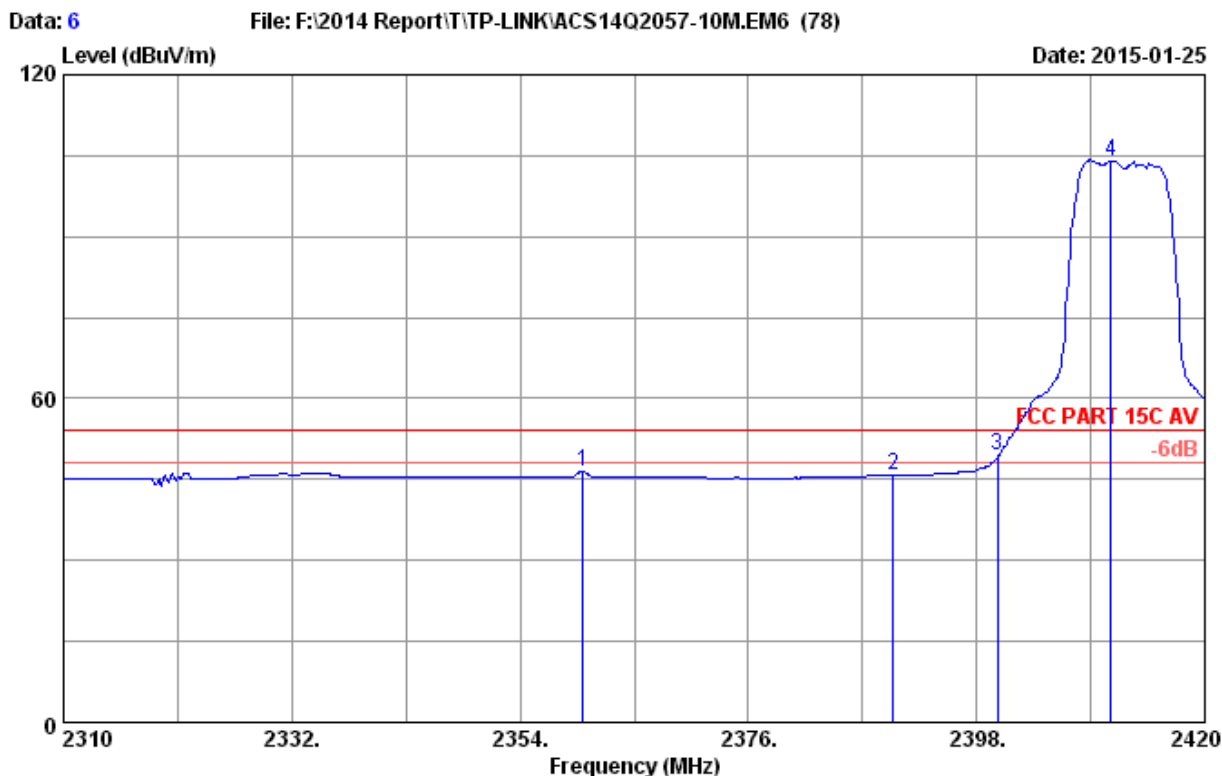

Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2360.050	28.09	5.74	35.70	48.35	46.48	54.00	7.52	Average
2	2390.000	28.16	5.78	35.70	47.68	45.92	54.00	8.08	Average
3	2400.000	28.18	5.80	35.70	51.04	49.32	54.00	4.68	Average
4	2410.980	28.20	5.81	35.70	105.79	104.10	54.00	-50.10	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

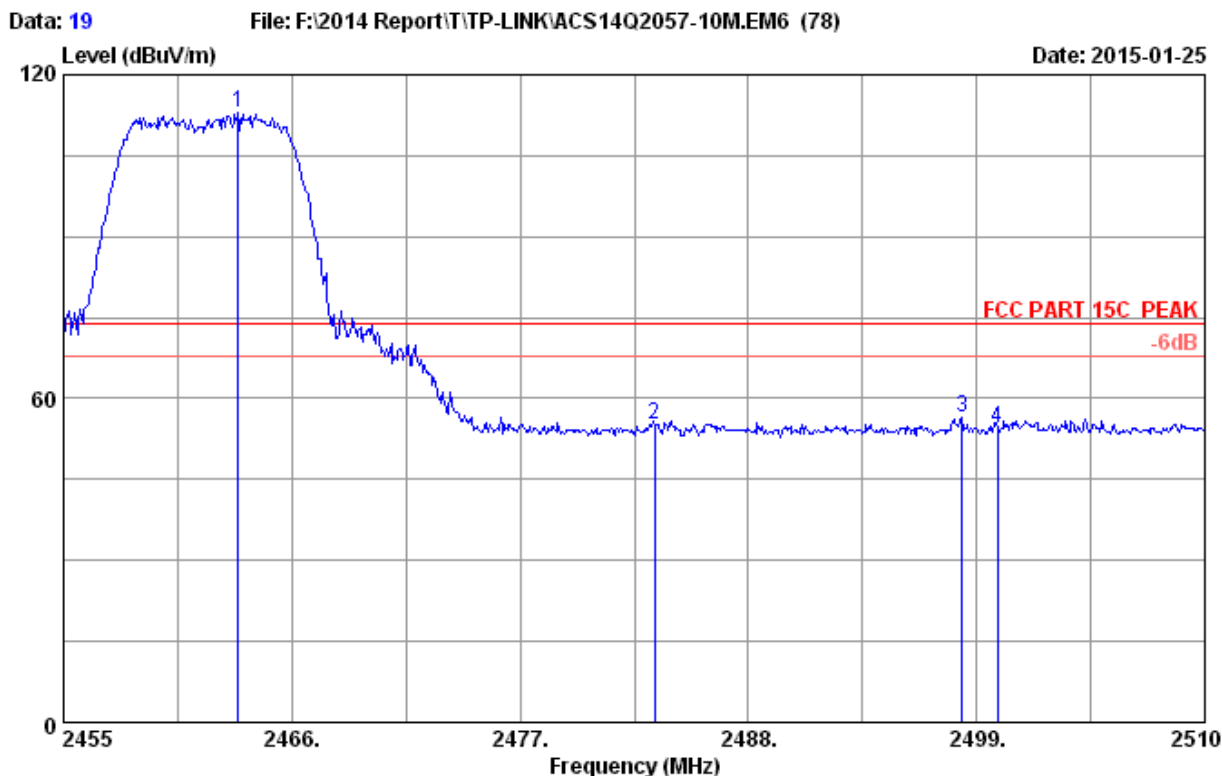

Site no. : 3m Chamber Data no. : 19
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2463.415	28.32	5.89	35.70	114.44	112.95	74.00	-38.95	Peak
2	2483.500	28.36	5.92	35.70	56.43	55.01	74.00	18.99	Peak
3	2498.285	28.40	5.94	35.70	57.77	56.41	74.00	17.59	Peak
4	2500.000	28.40	5.94	35.70	55.92	54.56	74.00	19.44	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

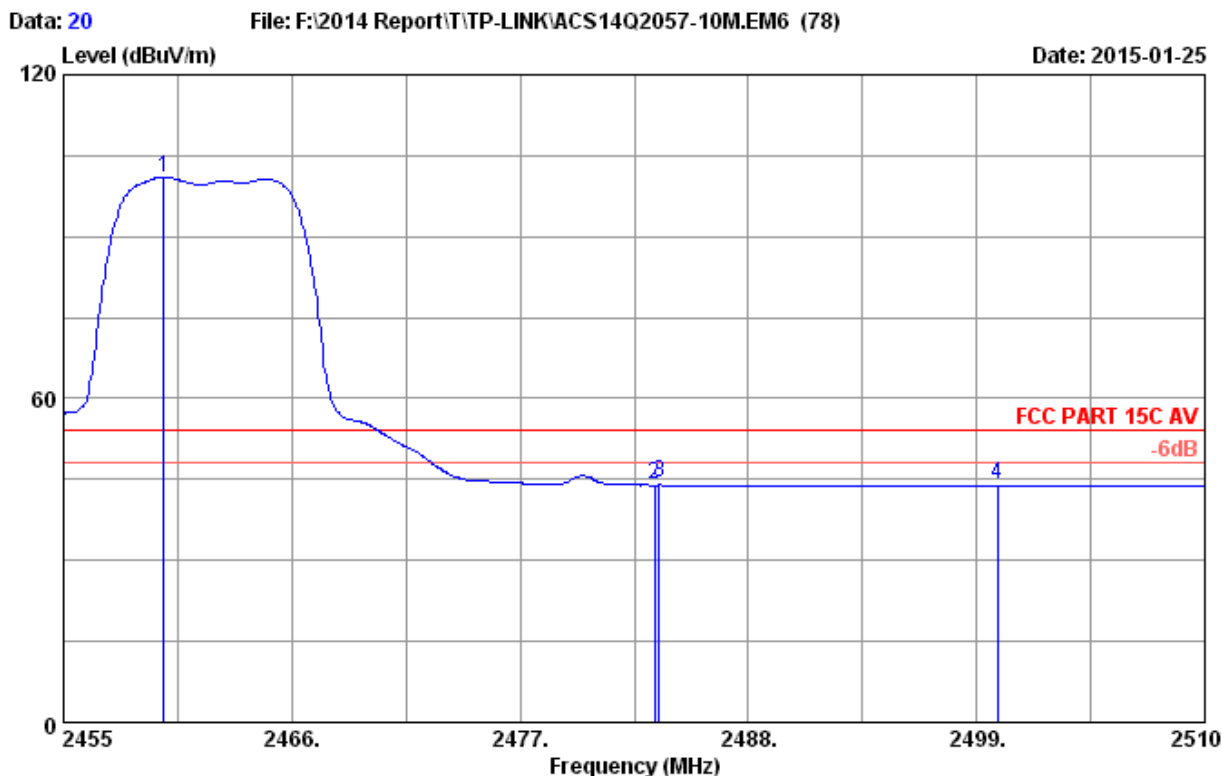

Site no. : 3m Chamber Data no. : 20
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2459.840	28.31	5.88	35.70	102.56	101.05	54.00	-47.05	Average
2	2483.500	28.36	5.92	35.70	45.41	43.99	54.00	10.01	Average
3	2483.710	28.36	5.92	35.70	45.76	44.34	54.00	9.66	Average
4	2500.000	28.40	5.94	35.70	45.47	44.11	54.00	9.89	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

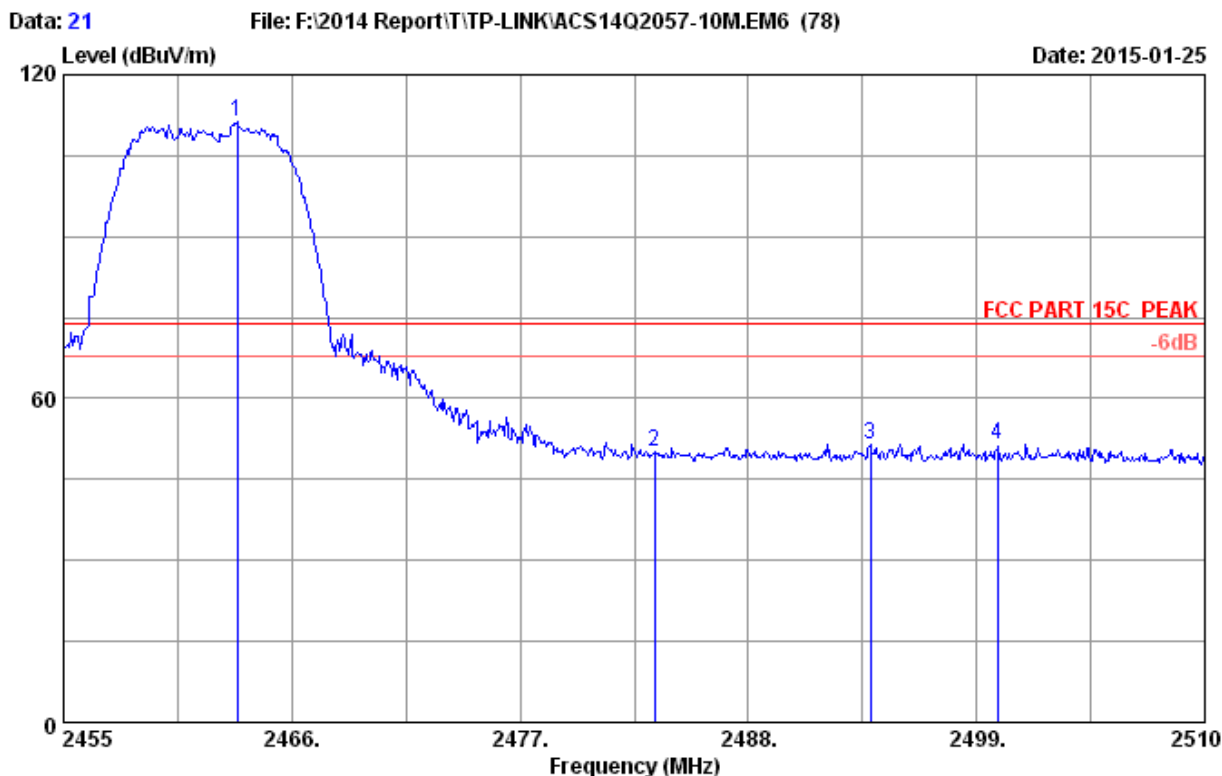


Site no. : 3m Chamber Data no. : 21
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2463.360	28.32	5.89	35.70	112.91	111.42	74.00	-37.42	Peak
2	2483.500	28.36	5.92	35.70	51.54	50.12	74.00	23.88	Peak
3	2493.885	28.39	5.93	35.70	53.00	51.62	74.00	22.38	Peak
4	2500.000	28.40	5.94	35.70	52.87	51.51	74.00	22.49	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

Data: 22 File: F:\2014 Report\T\TP-LINK\ACS14Q2057-10M.EM6 (78)


Date: 2015-01-25

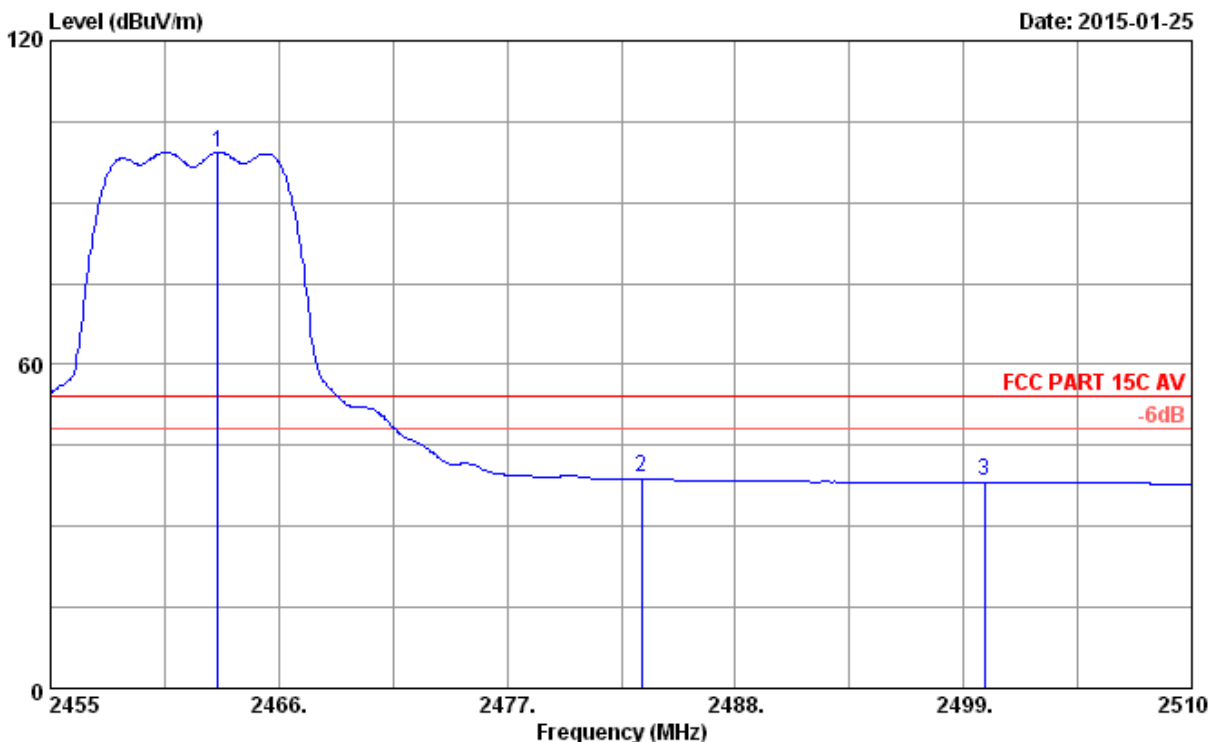

Site no. : 3m Chamber Data no. : 22
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2463.085	28.32	5.89	35.70	100.72	99.23	54.00	-45.23	Average
2	2483.500	28.36	5.92	35.70	40.61	39.19	54.00	14.81	Average
3	2500.000	28.40	5.94	35.70	39.82	38.46	54.00	15.54	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

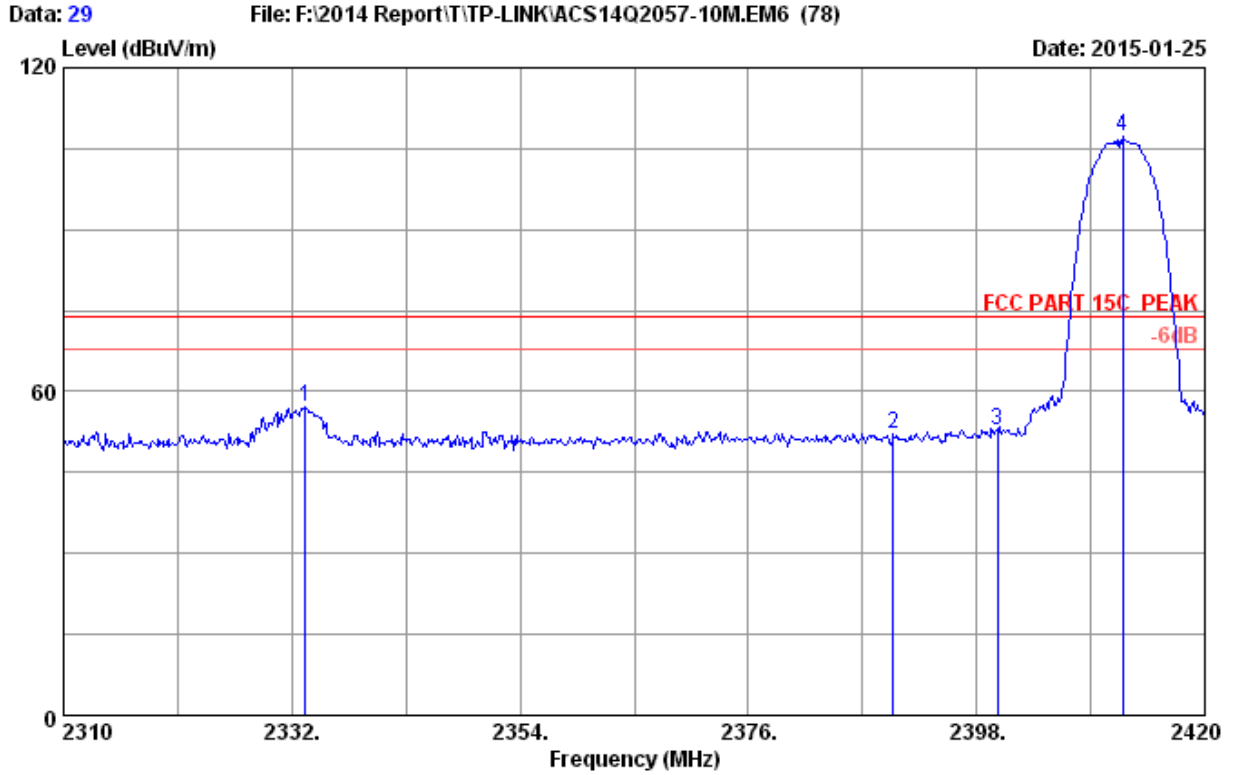

Site no. : 3m Chamber Data no. : 29
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2333.320	28.03	5.70	35.70	58.98	57.01	74.00	16.99	Peak
2	2389.970	28.16	5.78	35.70	53.96	52.20	74.00	21.80	Peak
3	2400.000	28.18	5.80	35.70	54.45	52.73	74.00	21.27	Peak
4	2412.080	28.21	5.81	35.70	109.05	107.37	74.00	-33.37	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

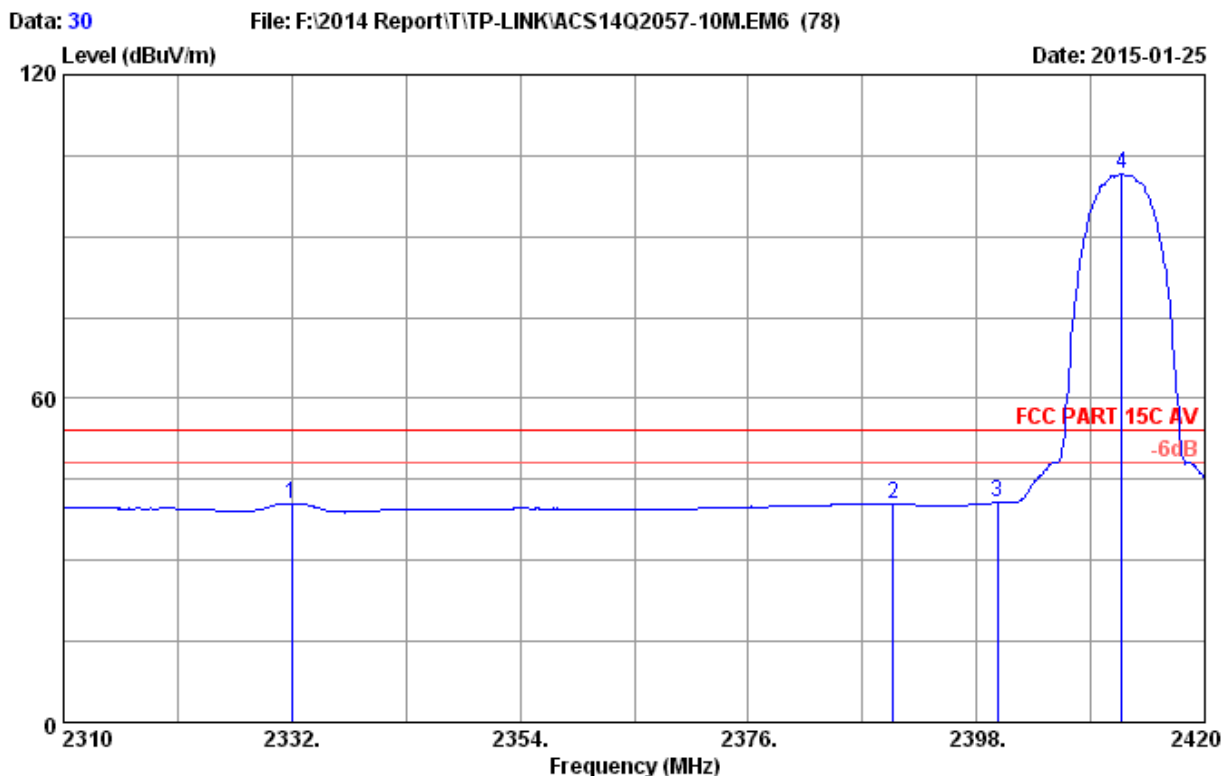

Site no. : 3m Chamber Data no. : 30
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2332.000	28.03	5.70	35.70	42.57	40.60	54.00	13.40	Average
2	2390.000	28.16	5.78	35.70	42.28	40.52	54.00	13.48	Average
3	2400.000	28.18	5.80	35.70	42.61	40.89	54.00	13.11	Average
4	2411.970	28.21	5.81	35.70	103.18	101.50	54.00	-47.50	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

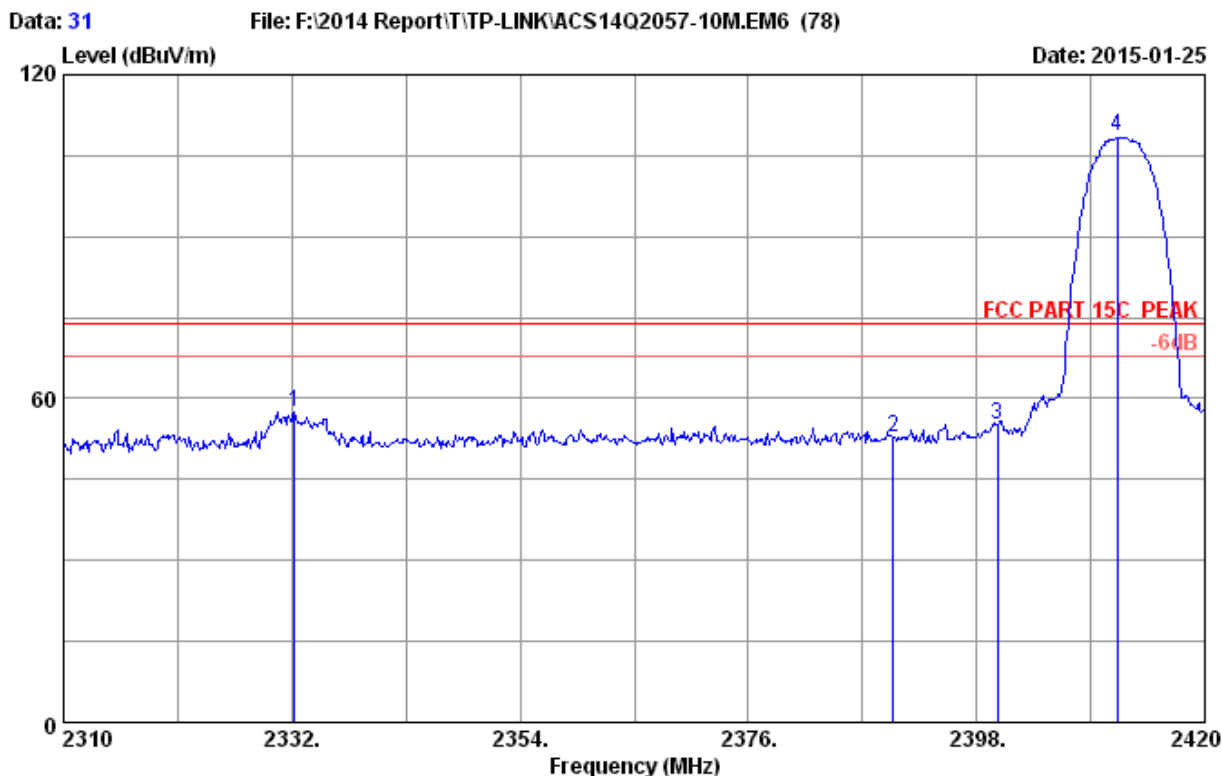

Site no. : 3m Chamber Data no. : 31
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2332.220	28.03	5.70	35.70	59.41	57.44	74.00	16.56	Peak
2	2390.000	28.16	5.78	35.70	54.72	52.96	74.00	21.04	Peak
3	2400.000	28.18	5.80	35.70	56.75	55.03	74.00	18.97	Peak
4	2411.530	28.21	5.81	35.70	110.39	108.71	74.00	-34.71	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

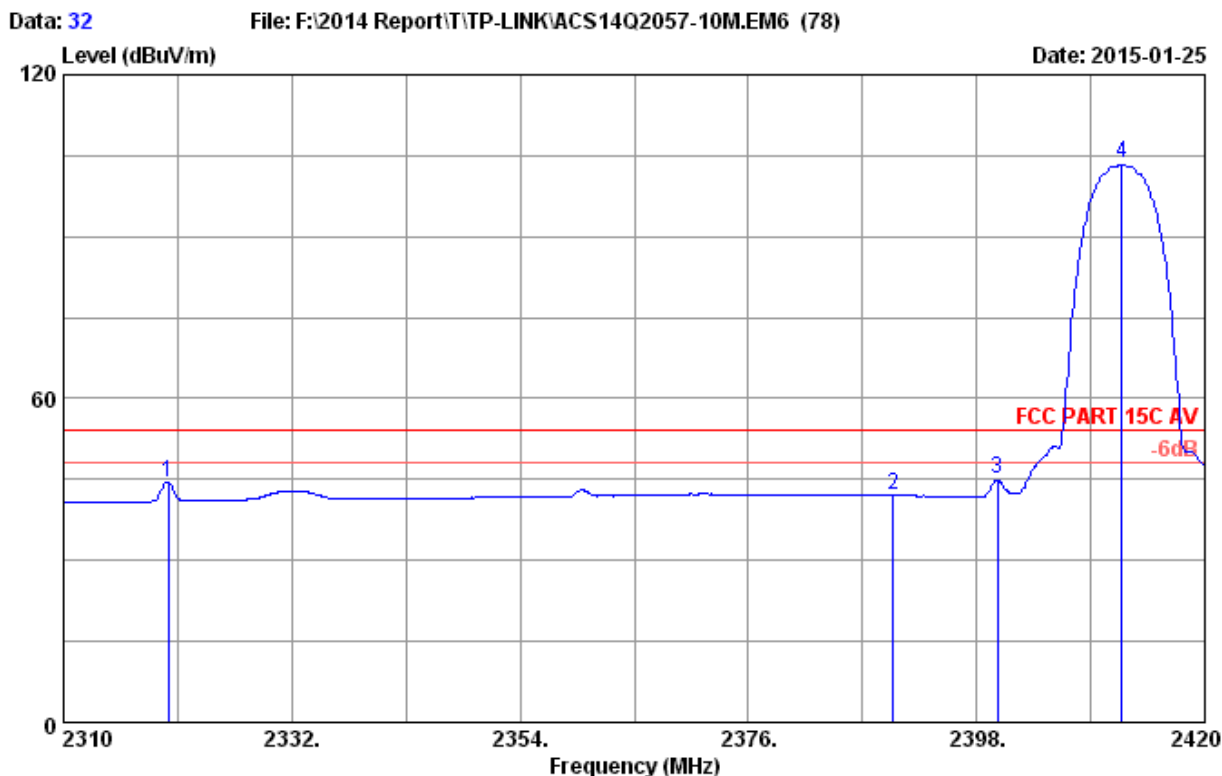

Site no. : 3m Chamber Data no. : 32
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2320.120	28.00	5.68	35.70	46.53	44.51	54.00	9.49	Average
2	2390.000	28.16	5.78	35.70	43.81	42.05	54.00	11.95	Average
3	2400.000	28.18	5.80	35.70	46.75	45.03	54.00	8.97	Average
4	2411.970	28.21	5.81	35.70	105.42	103.74	54.00	-49.74	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

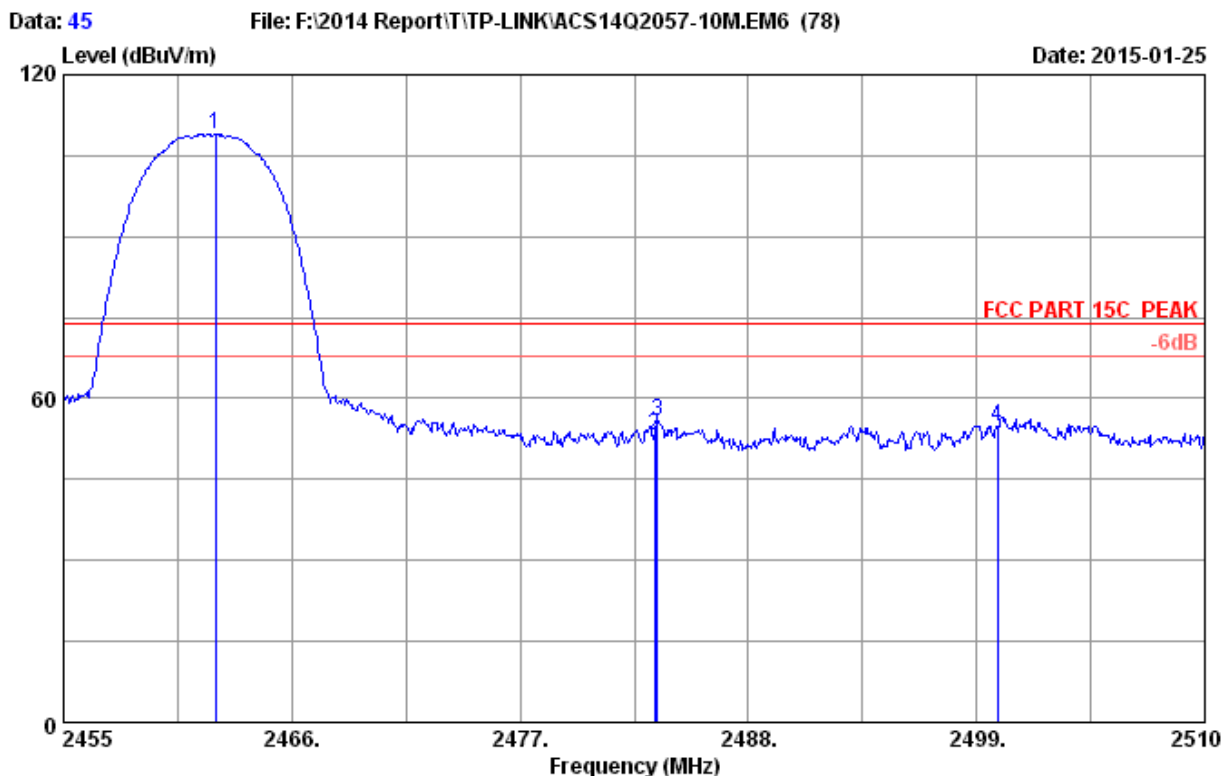

Site no. : 3m Chamber Data no. : 45
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.315	28.32	5.89	35.70	110.48	108.99	74.00	-34.99	Peak
2	2483.490	28.36	5.92	35.70	54.57	53.15	74.00	20.85	Peak
3	2483.600	28.36	5.92	35.70	57.26	55.84	74.00	18.16	Peak
4	2500.000	28.40	5.94	35.70	56.18	54.82	74.00	19.18	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

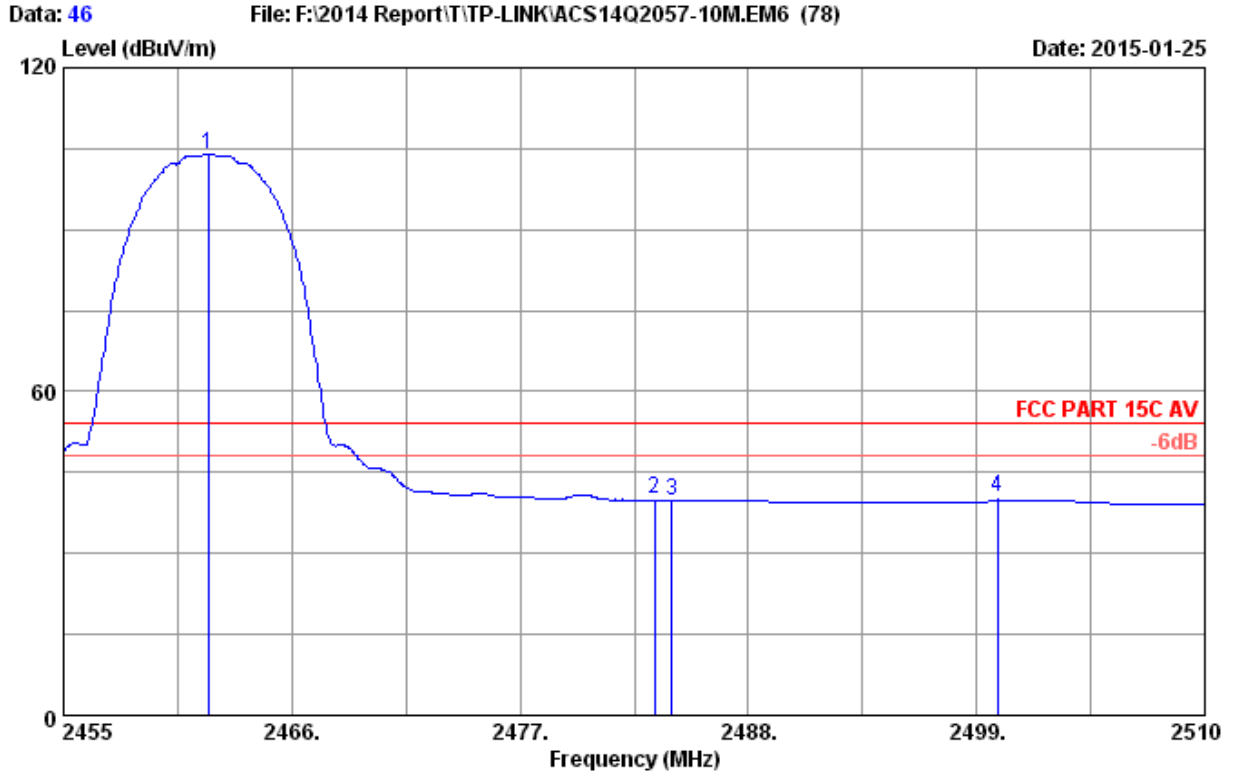

Site no. : 3m Chamber Data no. : 46
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2461.985	28.32	5.89	35.70	105.55	104.06	54.00	-50.06	Average
2	2483.500	28.36	5.92	35.70	41.66	40.24	54.00	13.76	Average
3	2484.315	28.37	5.92	35.70	41.35	39.94	54.00	14.06	Average
4	2500.000	28.40	5.94	35.70	41.72	40.36	54.00	13.64	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

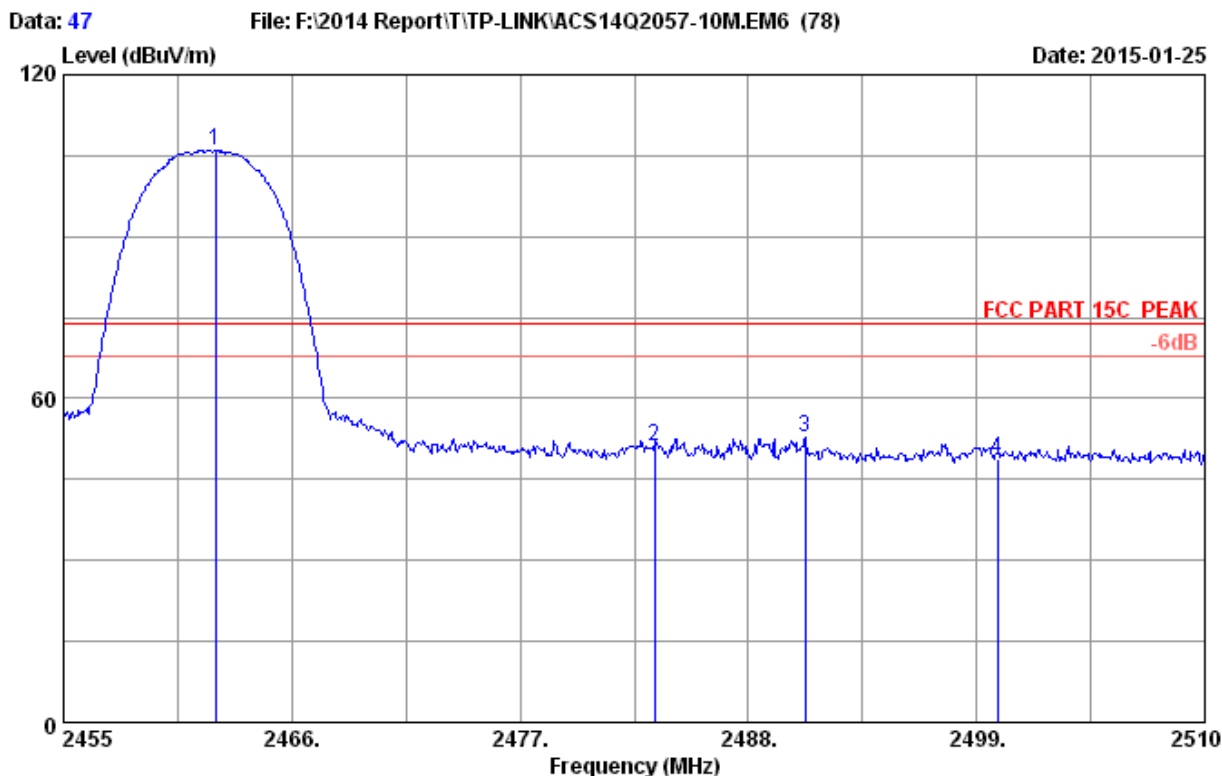

Site no. : 3m Chamber Data no. : 47
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.315	28.32	5.89	35.70	107.45	105.96	74.00	-31.96	Peak
2	2483.490	28.36	5.92	35.70	52.57	51.15	74.00	22.85	Peak
3	2490.750	28.38	5.93	35.70	54.37	52.98	74.00	21.02	Peak
4	2500.000	28.40	5.94	35.70	50.11	48.75	74.00	25.25	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

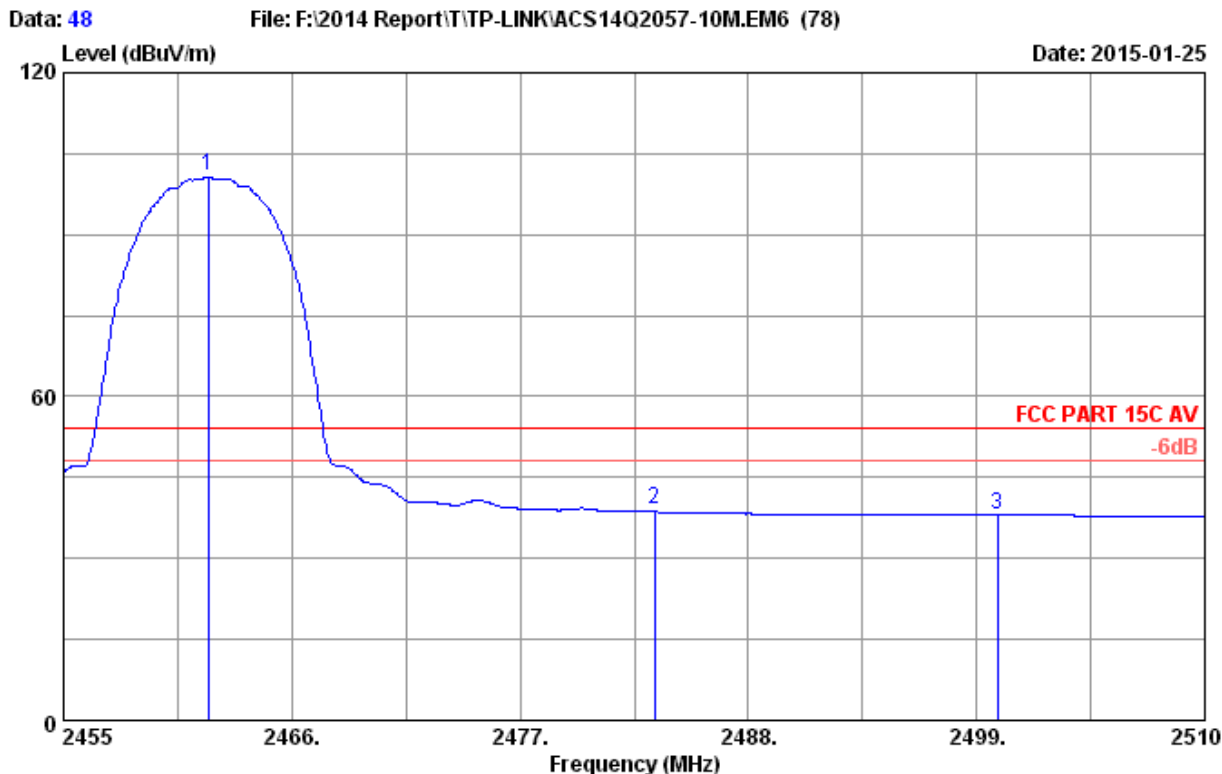

Site no. : 3m Chamber Data no. : 48
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2461.985	28.32	5.89	35.70	102.43	100.94	54.00	-46.94	Average
2	2483.500	28.36	5.92	35.70	40.52	39.10	54.00	14.90	Average
3	2500.000	28.40	5.94	35.70	39.41	38.05	54.00	15.95	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

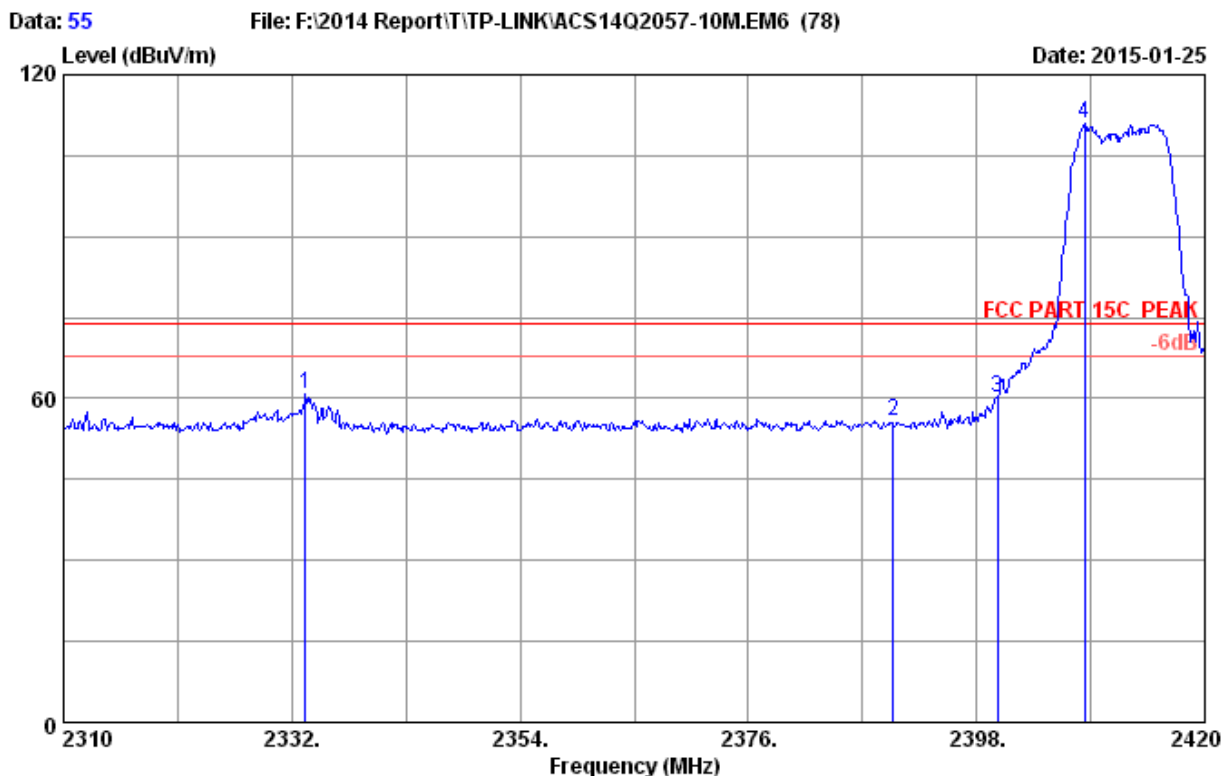

Site no. : 3m Chamber Data no. : 55
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2333.320	28.03	5.70	35.70	62.75	60.78	74.00	13.22	Peak
2	2390.000	28.16	5.78	35.70	57.58	55.82	74.00	18.18	Peak
3	2400.000	28.18	5.80	35.70	61.75	60.03	74.00	13.97	Peak
4	2408.450	28.20	5.81	35.70	112.76	111.07	74.00	-37.07	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

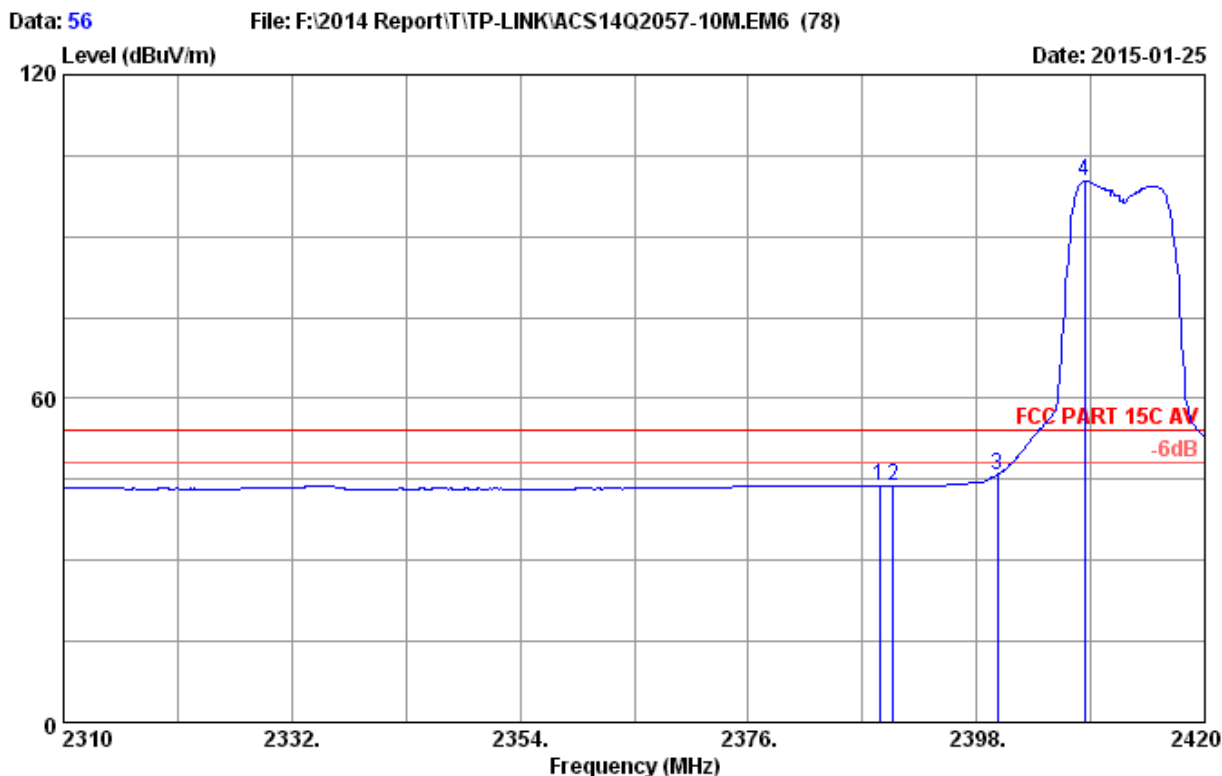

Site no. : 3m Chamber Data no. : 56
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2388.650	28.16	5.78	35.70	45.61	43.85	54.00	10.15	Average
2	2390.000	28.16	5.78	35.70	45.53	43.77	54.00	10.23	Average
3	2400.000	28.18	5.80	35.70	47.52	45.80	54.00	8.20	Average
4	2408.450	28.20	5.81	35.70	101.90	100.21	54.00	-46.21	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

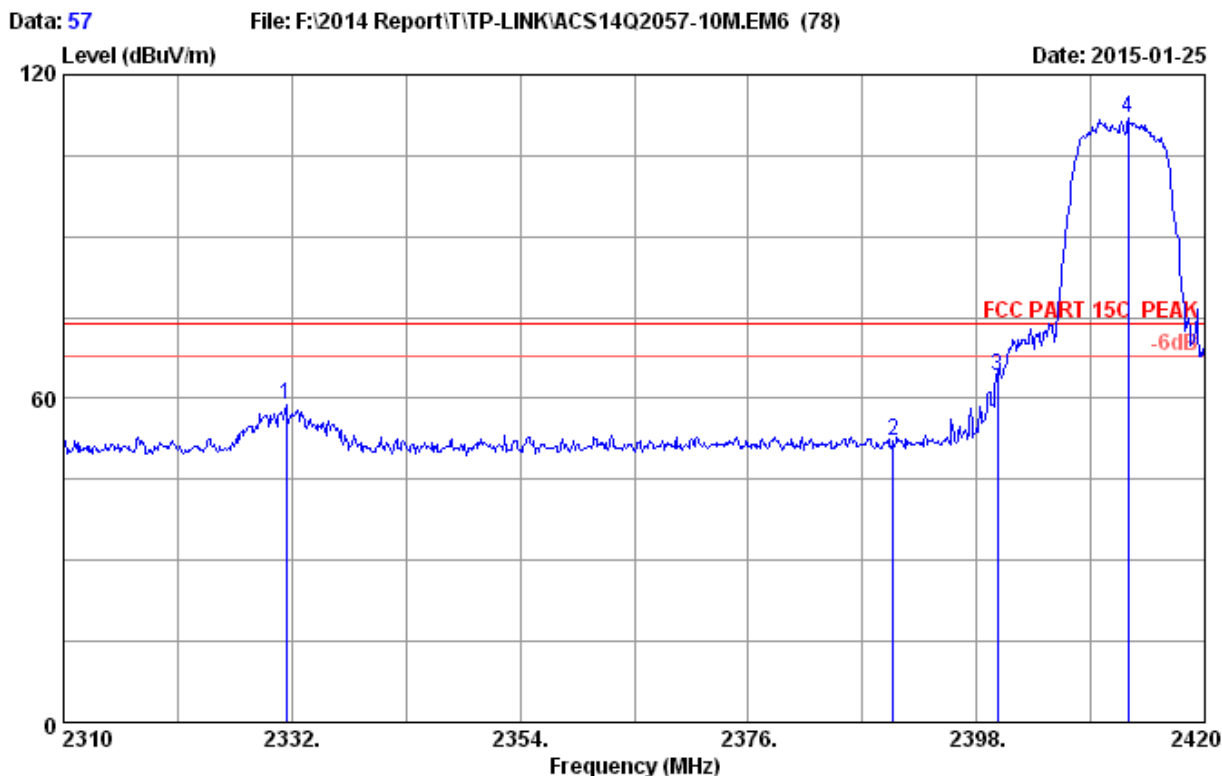

Site no. : 3m Chamber Data no. : 57
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2331.450	28.03	5.70	35.70	60.87	58.90	74.00	15.10	Peak
2	2390.000	28.16	5.78	35.70	53.82	52.06	74.00	21.94	Peak
3	2400.000	28.18	5.80	35.70	65.75	64.03	74.00	9.97	Peak
4	2412.630	28.21	5.82	35.70	113.70	112.03	74.00	-38.03	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

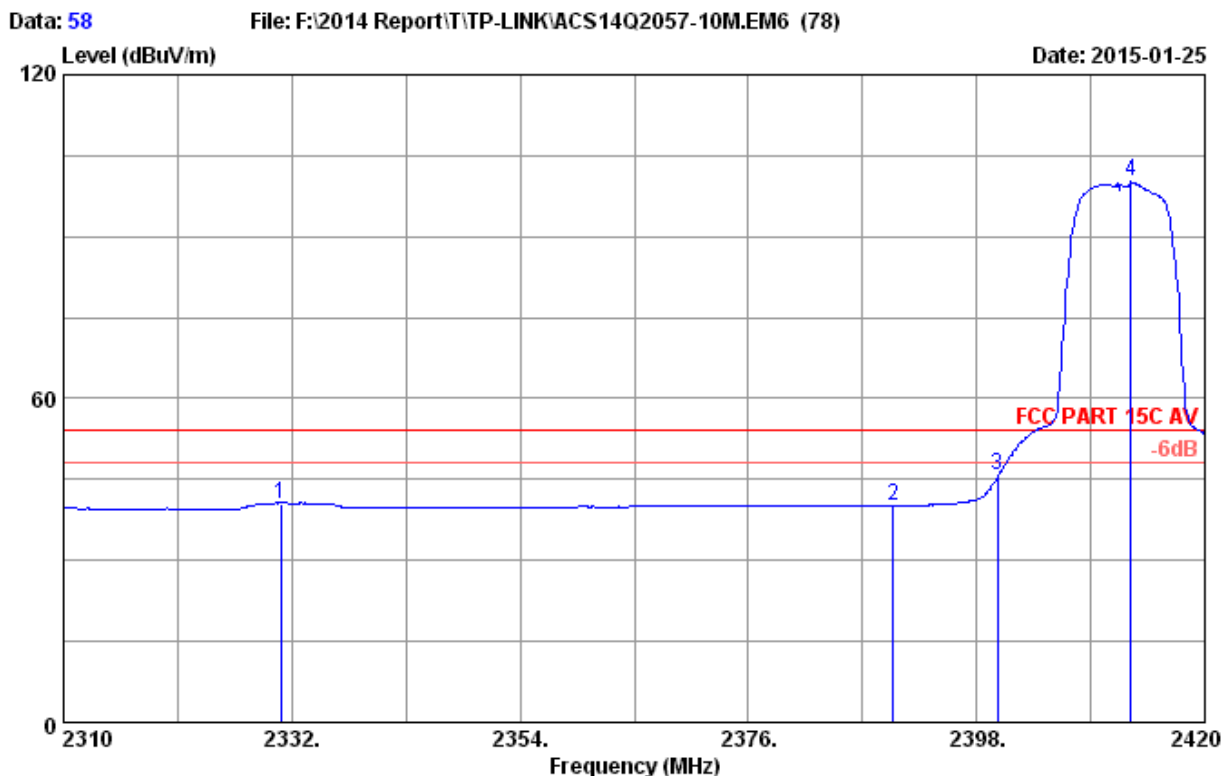

Site no. : 3m Chamber Data no. : 58
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2330.900	28.03	5.70	35.70	42.50	40.53	54.00	13.47	Average
2	2390.000	28.16	5.78	35.70	41.75	39.99	54.00	14.01	Average
3	2400.000	28.18	5.80	35.70	47.43	45.71	54.00	8.29	Average
4	2412.850	28.21	5.82	35.70	101.85	100.18	54.00	-46.18	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

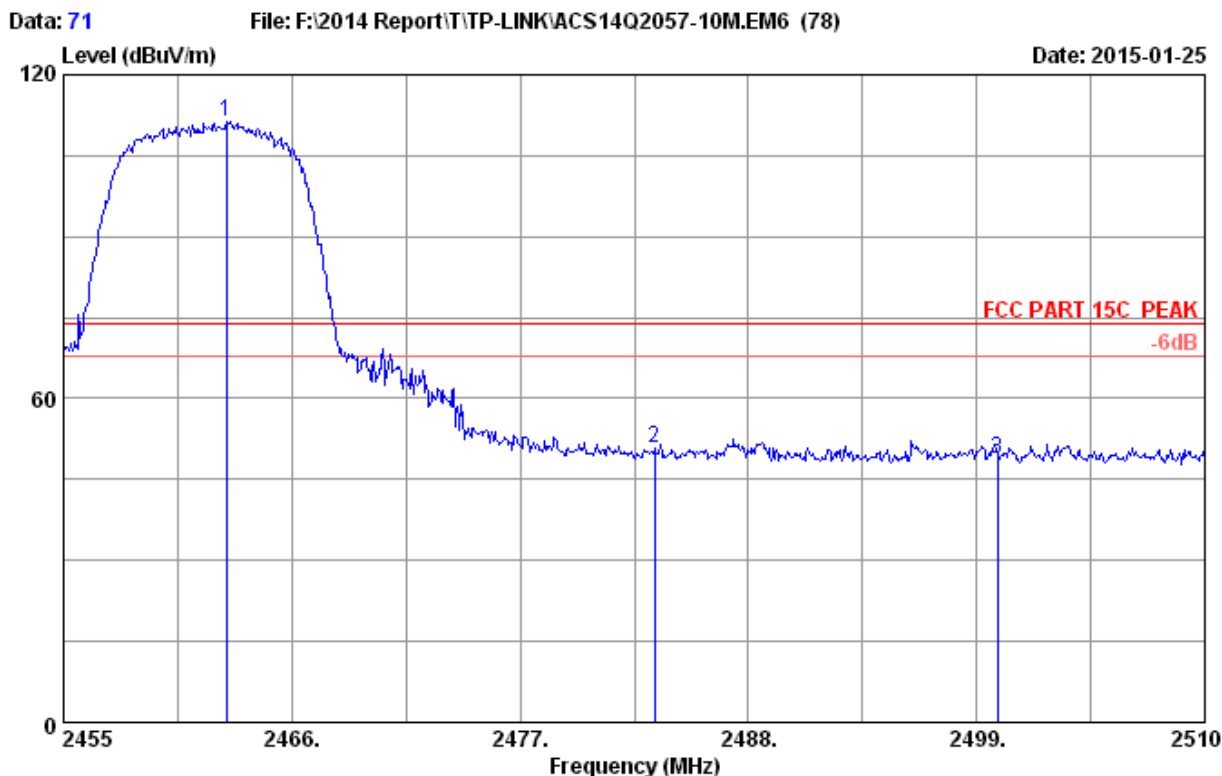

Site no. : 3m Chamber Data no. : 71
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.865	28.32	5.89	35.70	112.71	111.22	74.00	-37.22	Peak
2	2483.500	28.36	5.92	35.70	52.31	50.89	74.00	23.11	Peak
3	2500.000	28.40	5.94	35.70	50.26	48.90	74.00	25.10	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

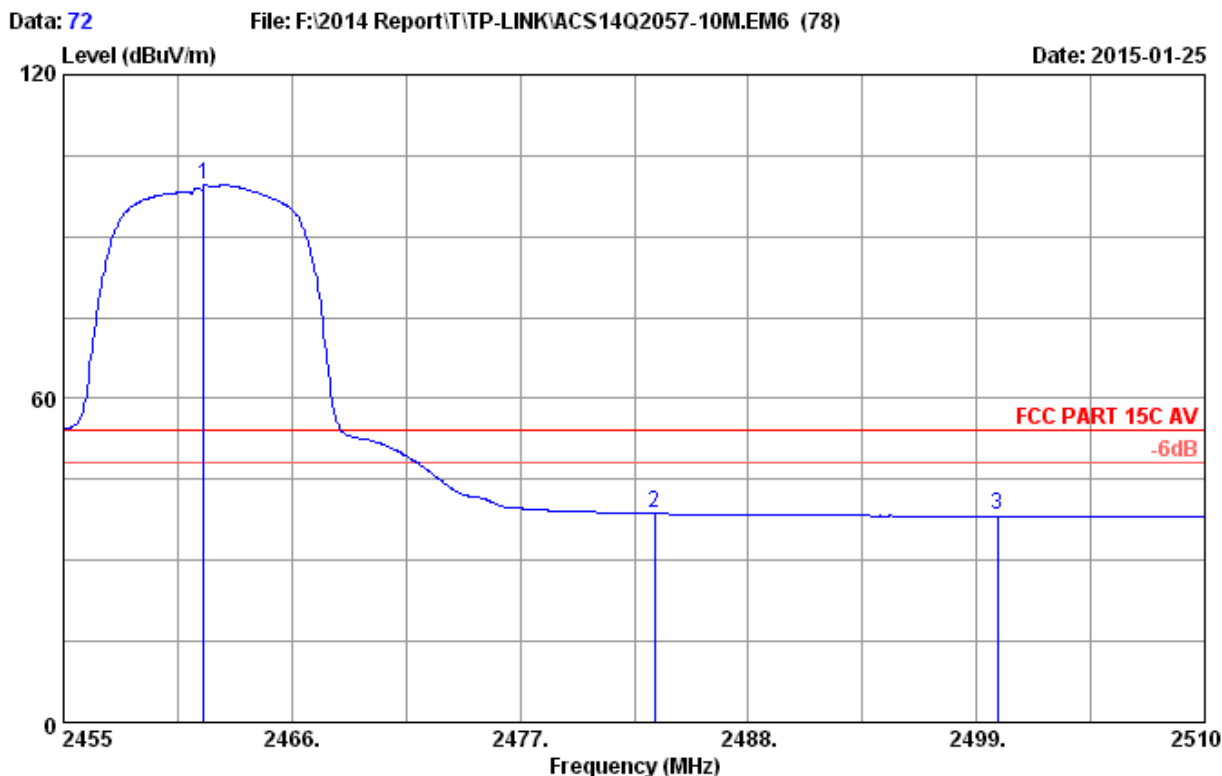

Site no. : 3m Chamber Data no. : 72
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2461.765	28.32	5.89	35.70	101.09	99.60	54.00	-45.60	Average
2	2483.500	28.36	5.92	35.70	40.31	38.89	54.00	15.11	Average
3	2500.000	28.40	5.94	35.70	39.82	38.46	54.00	15.54	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

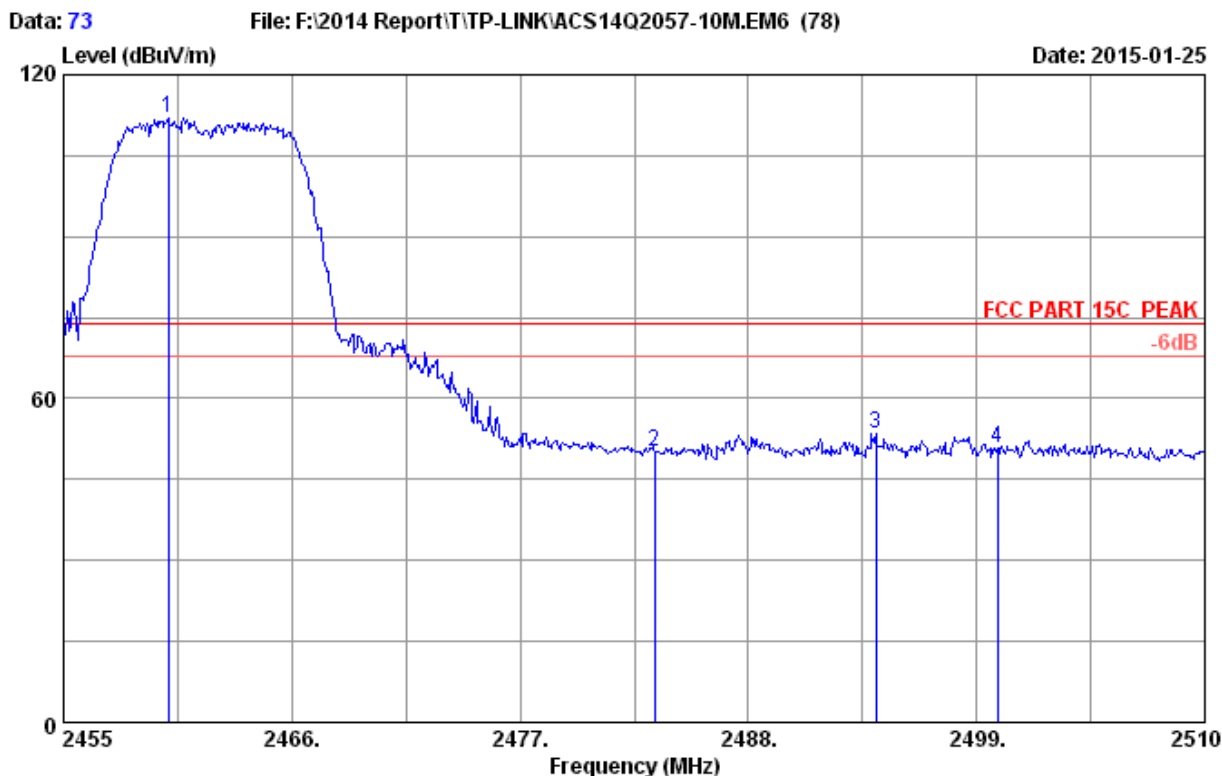

Site no. : 3m Chamber Data no. : 73
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2460.060	28.31	5.88	35.70	113.37	111.86	74.00	-37.86	Peak
2	2483.500	28.36	5.92	35.70	51.49	50.07	74.00	23.93	Peak
3	2494.160	28.39	5.93	35.70	54.72	53.34	74.00	20.66	Peak
4	2500.000	28.40	5.94	35.70	52.21	50.85	74.00	23.15	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

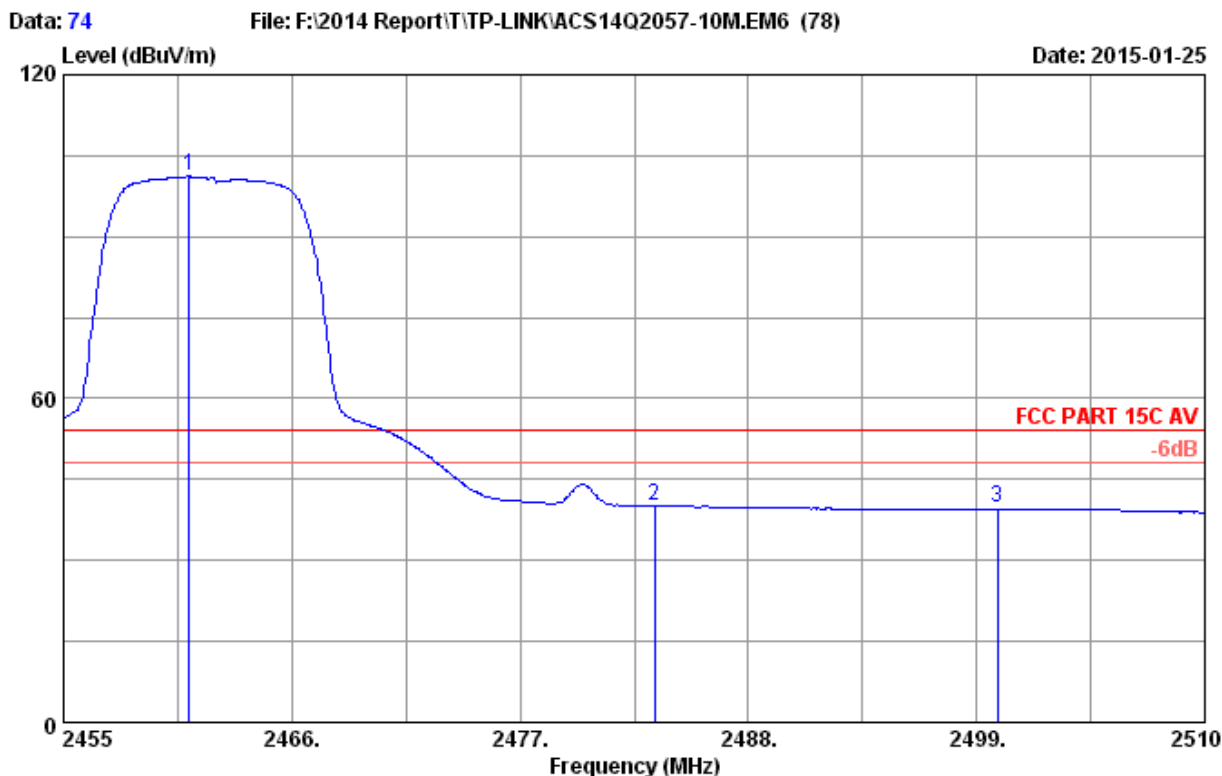


Site no. : 3m Chamber Data no. : 74
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11n HT20 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2461.050	28.31	5.89	35.70	102.64	101.14	54.00	-47.14	Average
2	2483.500	28.36	5.92	35.70	41.48	40.06	54.00	13.94	Average
3	2500.000	28.40	5.94	35.70	41.16	39.80	54.00	14.20	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.


20MHz

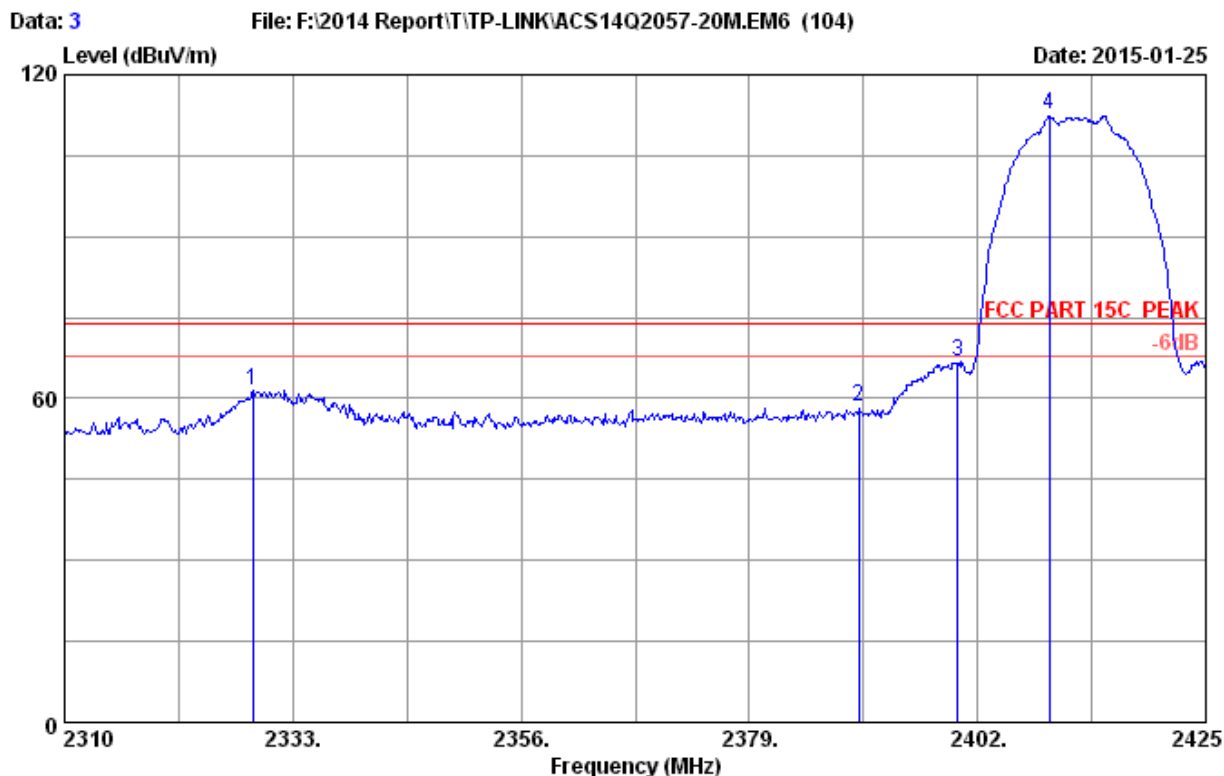

Site no. : 3m Chamber Data no. : 3
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2328.975	28.02	5.69	35.70	63.56	61.57	74.00	12.43	Peak
2	2390.000	28.16	5.78	35.70	60.36	58.60	74.00	15.40	Peak
3	2400.000	28.18	5.80	35.70	68.45	66.73	74.00	7.27	Peak
4	2409.245	28.20	5.81	35.70	114.33	112.64	74.00	-38.64	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

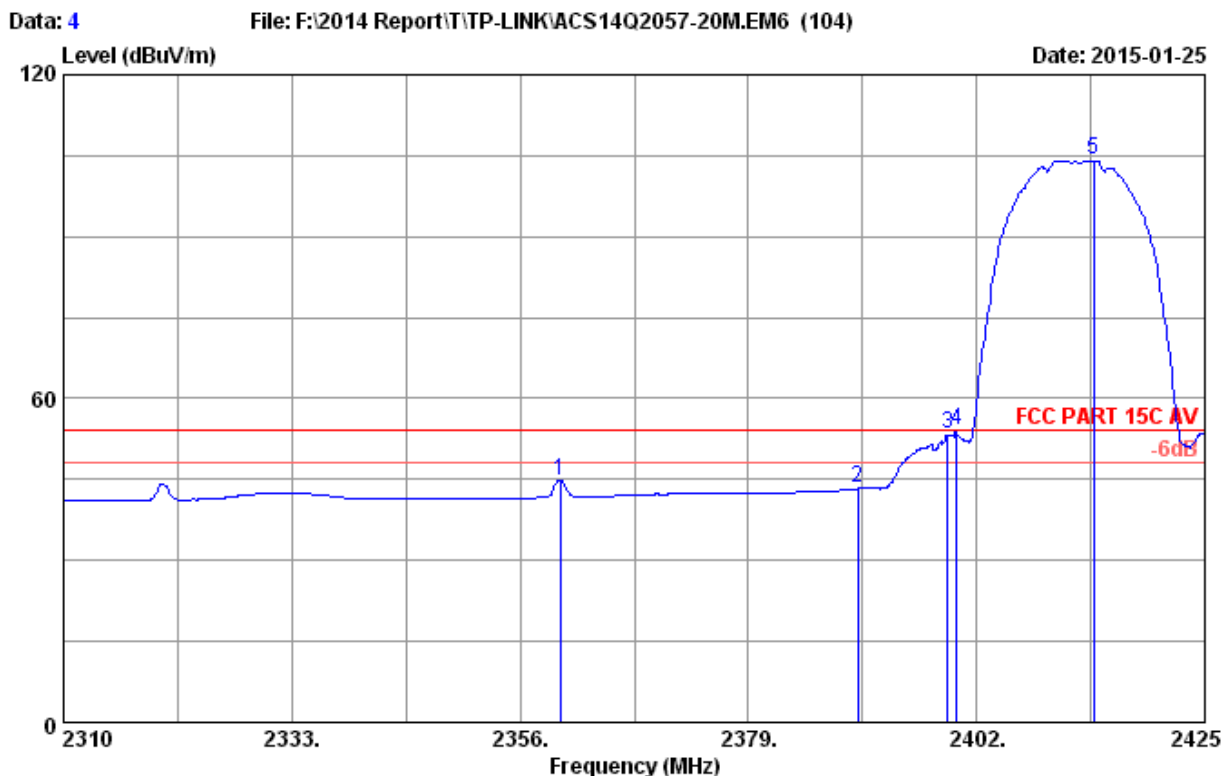

Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2360.025	28.09	5.74	35.70	46.72	44.85	54.00	9.15	Average
2	2390.000	28.16	5.78	35.70	45.34	43.58	54.00	10.42	Average
3	2399.125	28.18	5.80	35.70	55.08	53.36	54.00	0.64	Average
4	2400.000	28.18	5.80	35.70	55.82	54.10	54.00	-0.10	Average
5	2413.845	28.21	5.82	35.70	105.87	104.20	54.00	-50.20	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

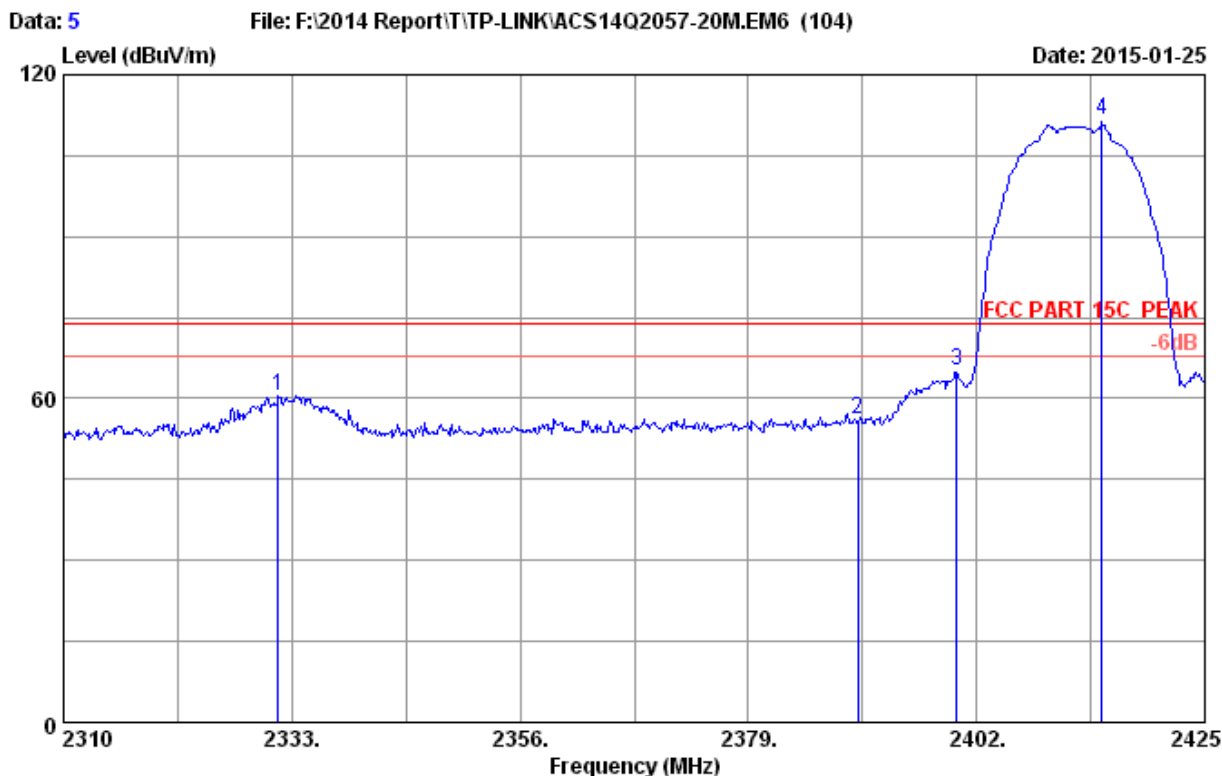

Site no. : 3m Chamber Data no. : 5
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2331.620	28.03	5.70	35.70	62.41	60.44	74.00	13.56	Peak
2	2390.000	28.16	5.78	35.70	57.75	55.99	74.00	18.01	Peak
3	2400.000	28.18	5.80	35.70	66.79	65.07	74.00	8.93	Peak
4	2414.650	28.21	5.82	35.70	113.48	111.81	74.00	-37.81	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

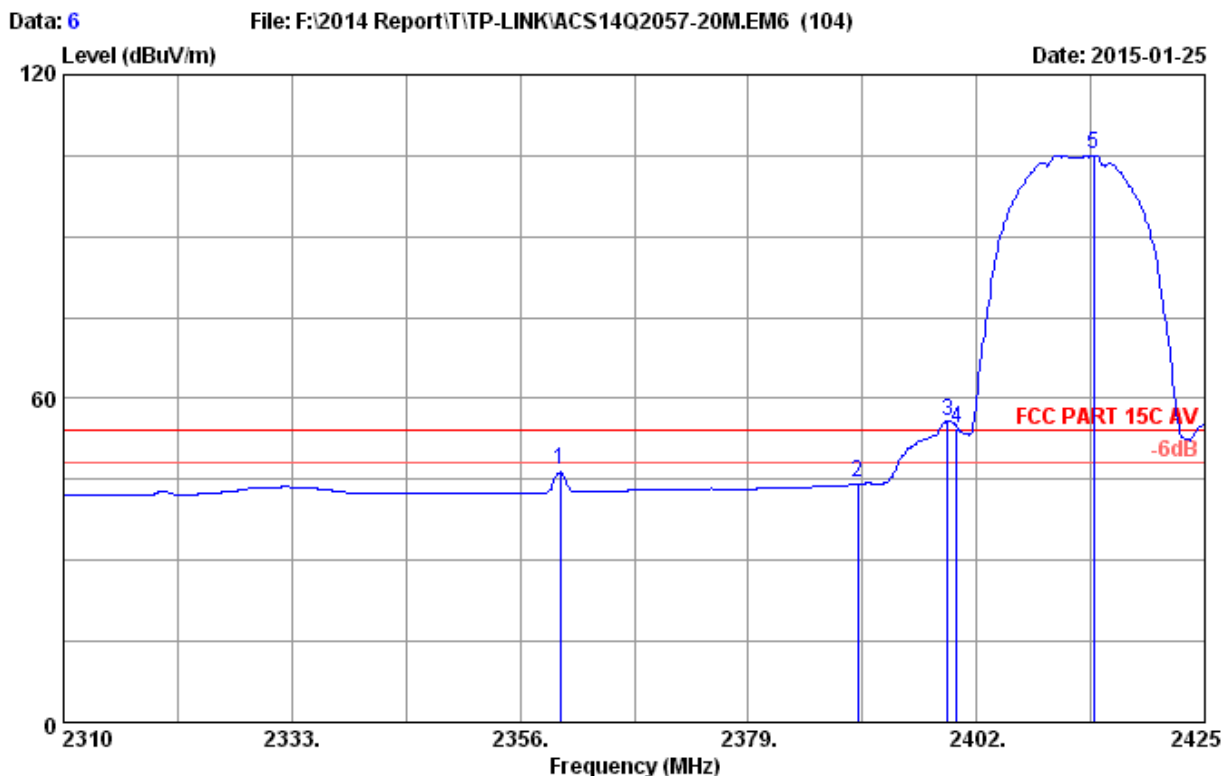

Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2360.025	28.09	5.74	35.70	48.61	46.74	54.00	7.26	Average
2	2390.000	28.16	5.78	35.70	46.35	44.59	54.00	9.41	Average
3	2399.125	28.18	5.80	35.70	57.63	55.91	54.00	-1.91	Average
4	2400.000	28.18	5.80	35.70	56.21	54.49	54.00	-0.49	Average
5	2413.845	28.21	5.82	35.70	106.84	105.17	54.00	-51.17	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

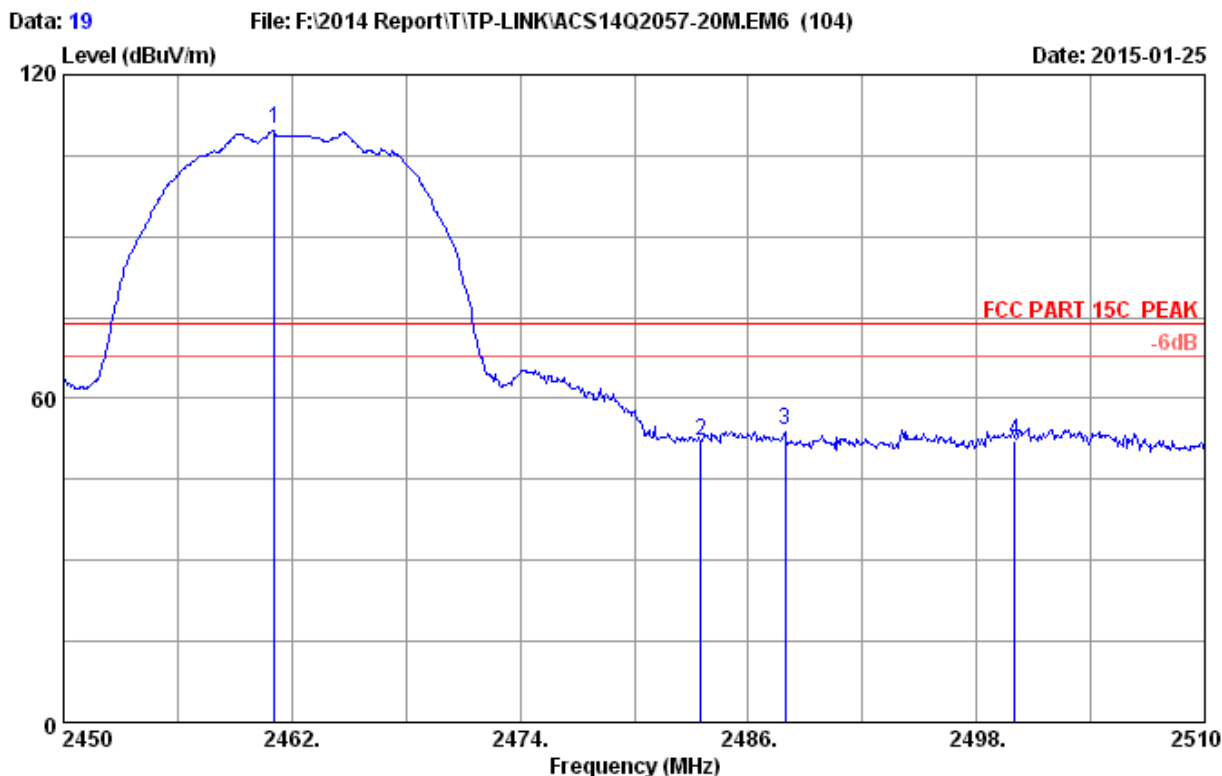

Site no. : 3m Chamber Data no. : 19
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2461.100	28.31	5.89	35.70	111.38	109.88	74.00	-35.88	Peak
2	2483.500	28.36	5.92	35.70	53.61	52.19	74.00	21.81	Peak
3	2487.920	28.37	5.92	35.70	55.42	54.01	74.00	19.99	Peak
4	2500.000	28.40	5.94	35.70	53.41	52.05	74.00	21.95	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

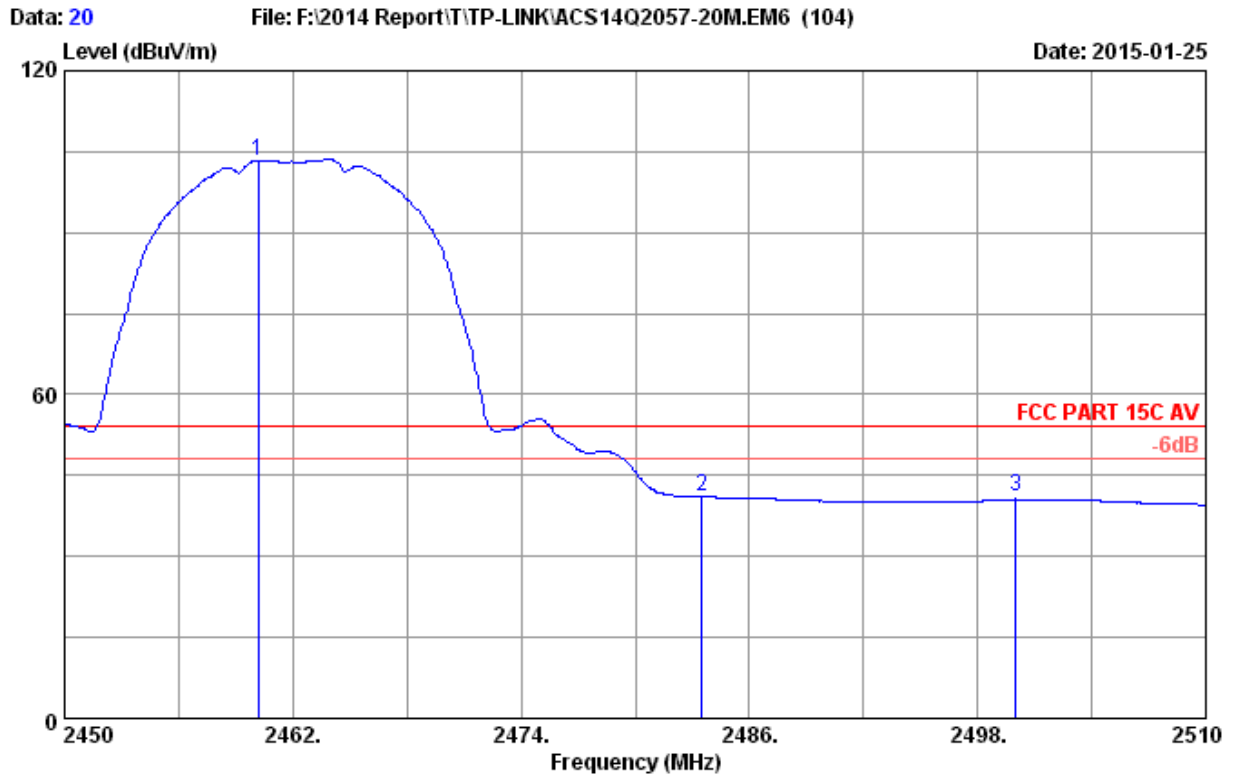

Site no. : 3m Chamber Data no. : 20
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2460.200	28.31	5.88	35.70	104.94	103.43	54.00	-49.43	Average
2	2483.500	28.36	5.92	35.70	42.45	41.03	54.00	12.97	Average
3	2500.000	28.40	5.94	35.70	42.33	40.97	54.00	13.03	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

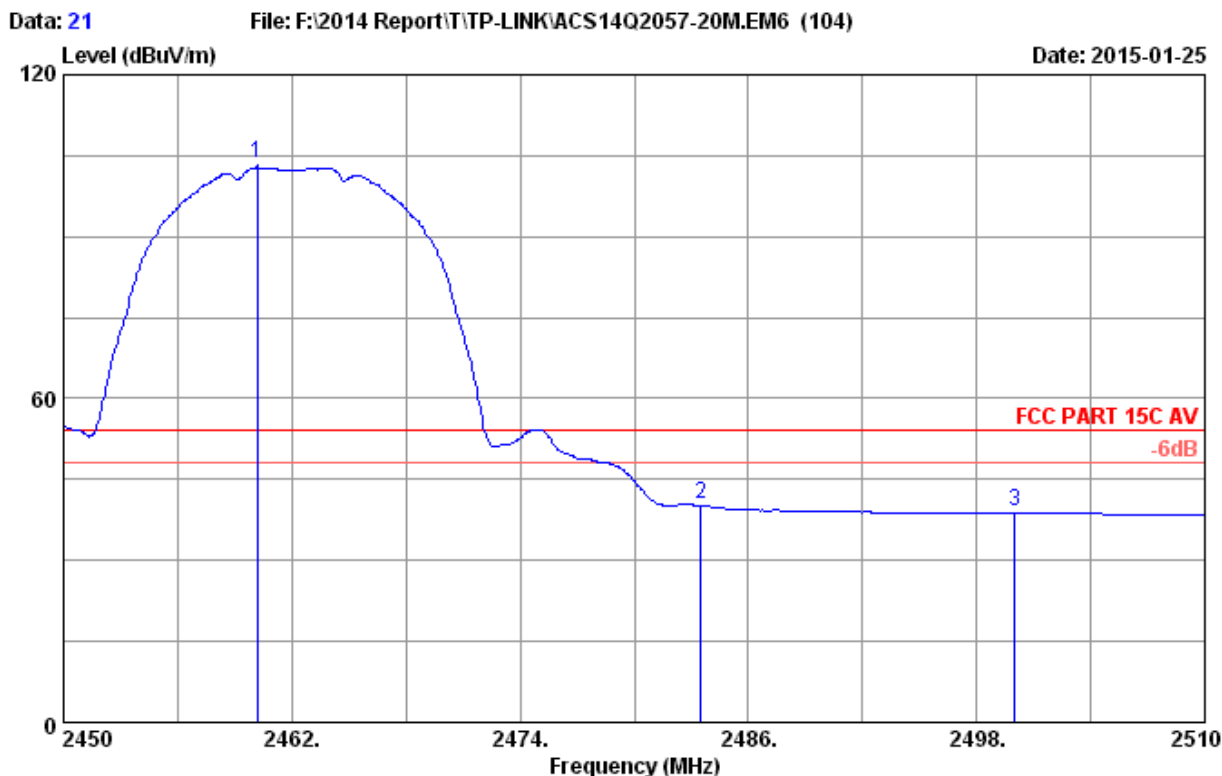

Site no. : 3m Chamber Data no. : 21
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2460.200	28.31	5.88	35.70	105.02	103.51	54.00	-49.51	Average
2	2483.500	28.36	5.92	35.70	41.75	40.33	54.00	13.67	Average
3	2500.000	28.40	5.94	35.70	40.62	39.26	54.00	14.74	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

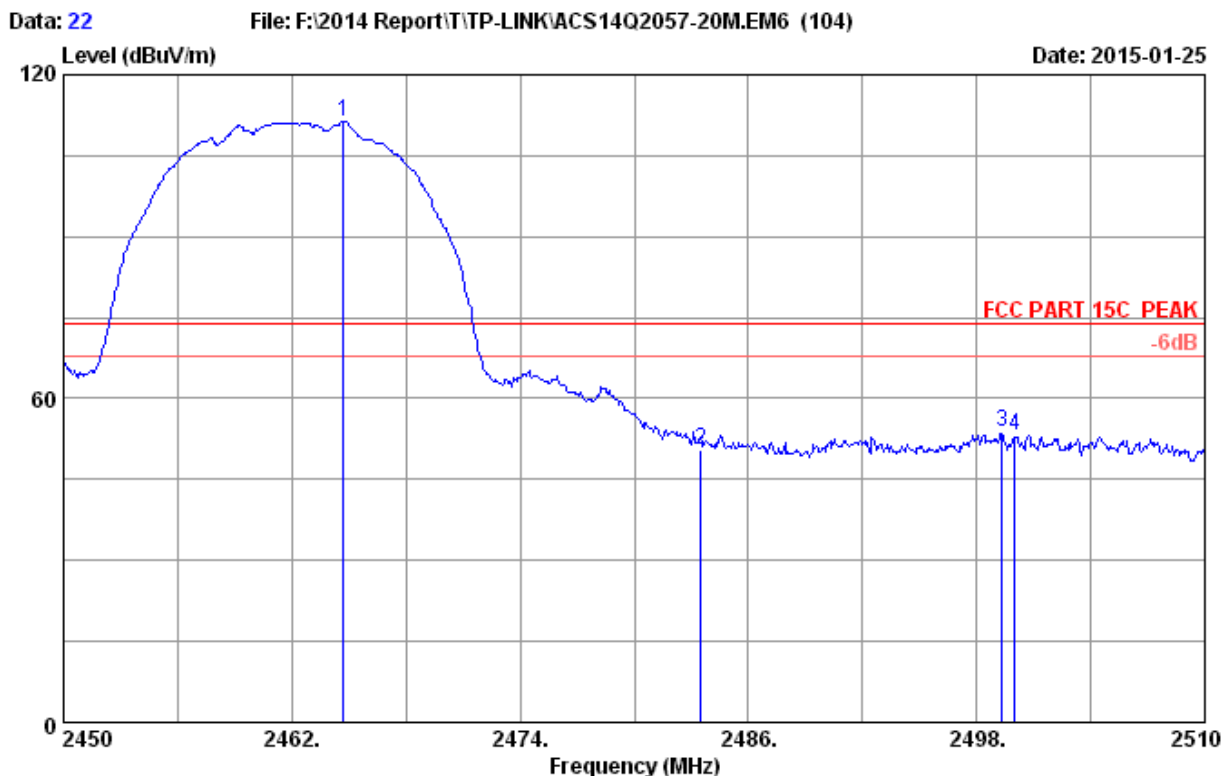

Site no. : 3m Chamber Data no. : 22
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2464.700	28.32	5.89	35.70	112.84	111.35	74.00	-37.35	Peak
2	2483.500	28.36	5.92	35.70	51.89	50.47	74.00	23.53	Peak
3	2499.320	28.40	5.94	35.70	55.34	53.98	74.00	20.02	Peak
4	2500.000	28.40	5.94	35.70	54.67	53.31	74.00	20.69	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

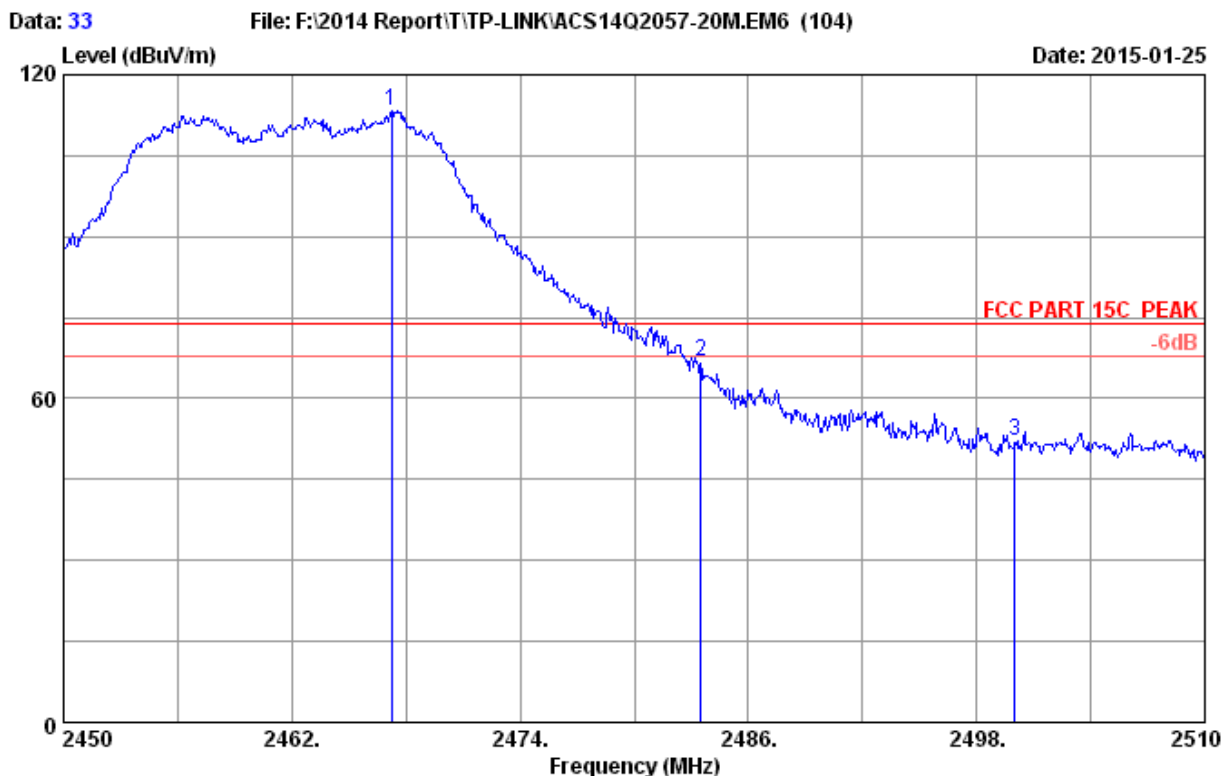

Site no. : 3m Chamber Data no. : 33
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2467.220	28.33	5.89	35.70	114.78	113.30	74.00	-39.30	Peak
2	2483.500	28.36	5.92	35.70	68.24	66.82	74.00	7.18	Peak
3	2500.000	28.40	5.94	35.70	53.59	52.23	74.00	21.77	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

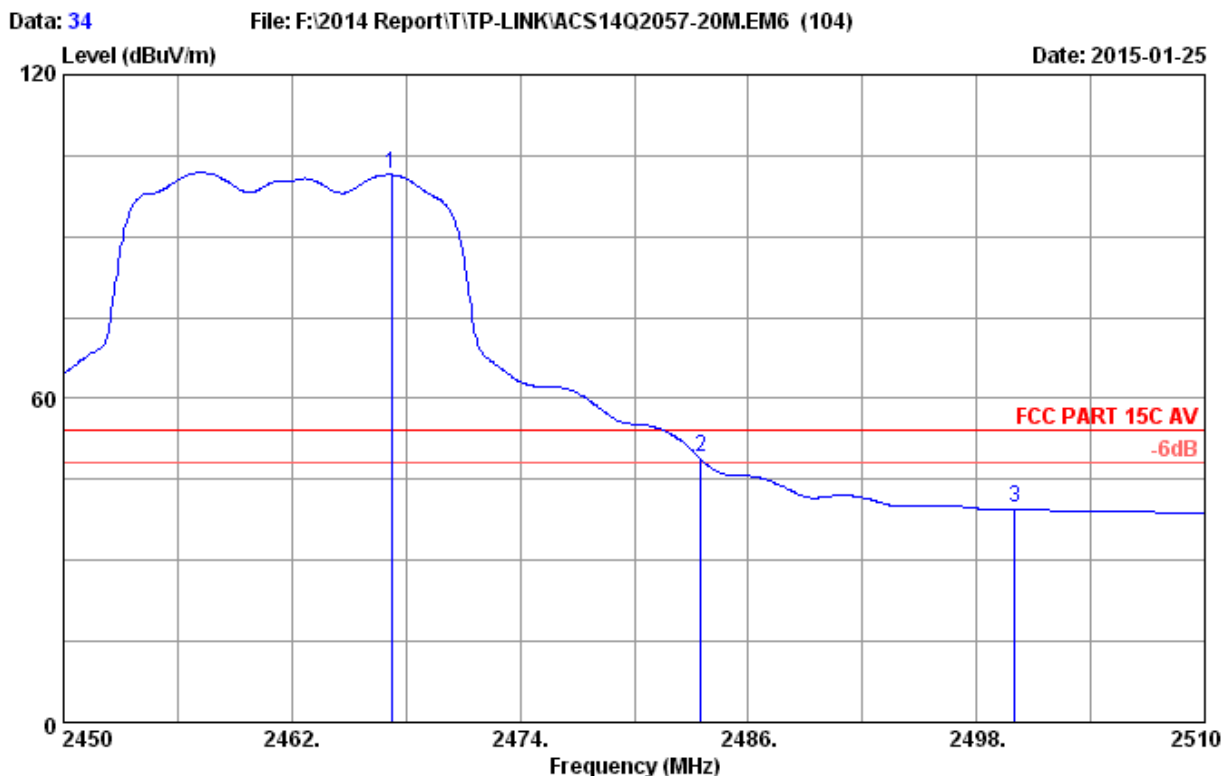

Site no. : 3m Chamber Data no. : 34
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2467.220	28.33	5.89	35.70	102.98	101.50	54.00	-47.50	Average
2	2483.500	28.36	5.92	35.70	50.72	49.30	54.00	4.70	Average
3	2500.000	28.40	5.94	35.70	41.25	39.89	54.00	14.11	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

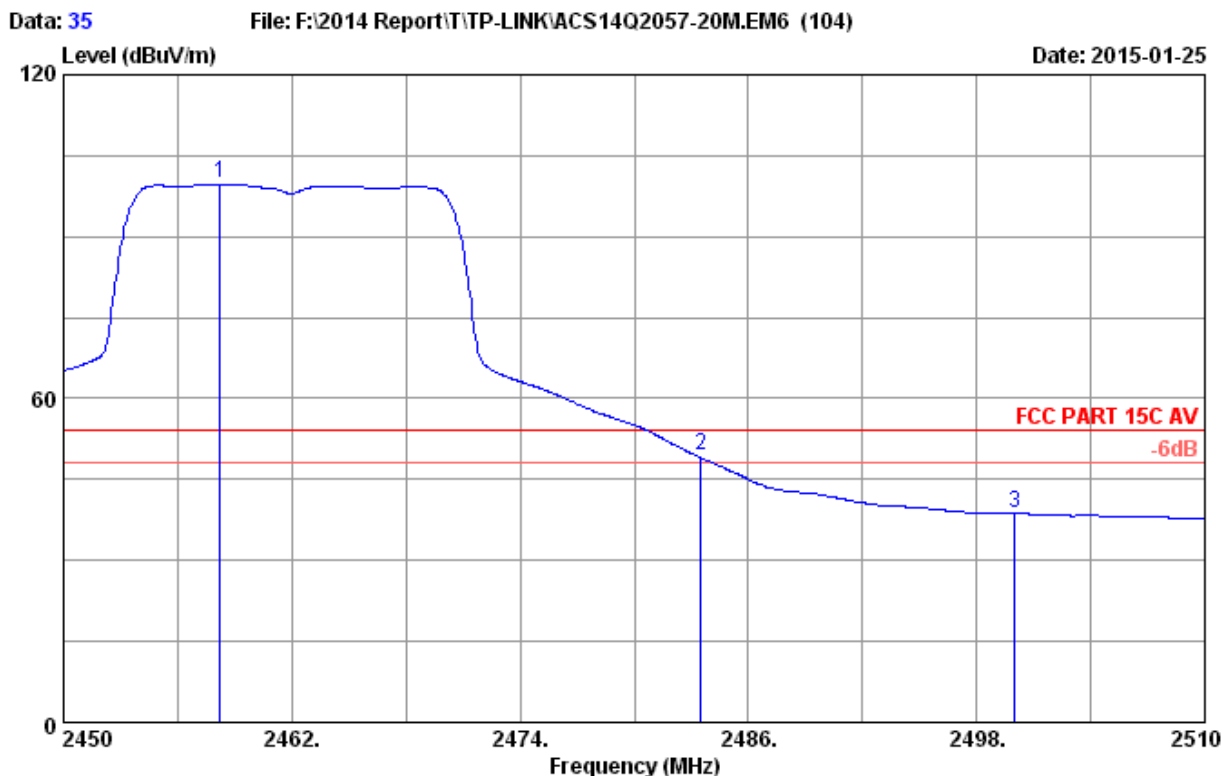

Site no. : 3m Chamber Data no. : 35
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2458.220	28.31	5.88	35.70	101.49	99.98	54.00	-45.98	Average
2	2483.500	28.36	5.92	35.70	50.73	49.31	54.00	4.69	Average
3	2500.000	28.40	5.94	35.70	40.26	38.90	54.00	15.10	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

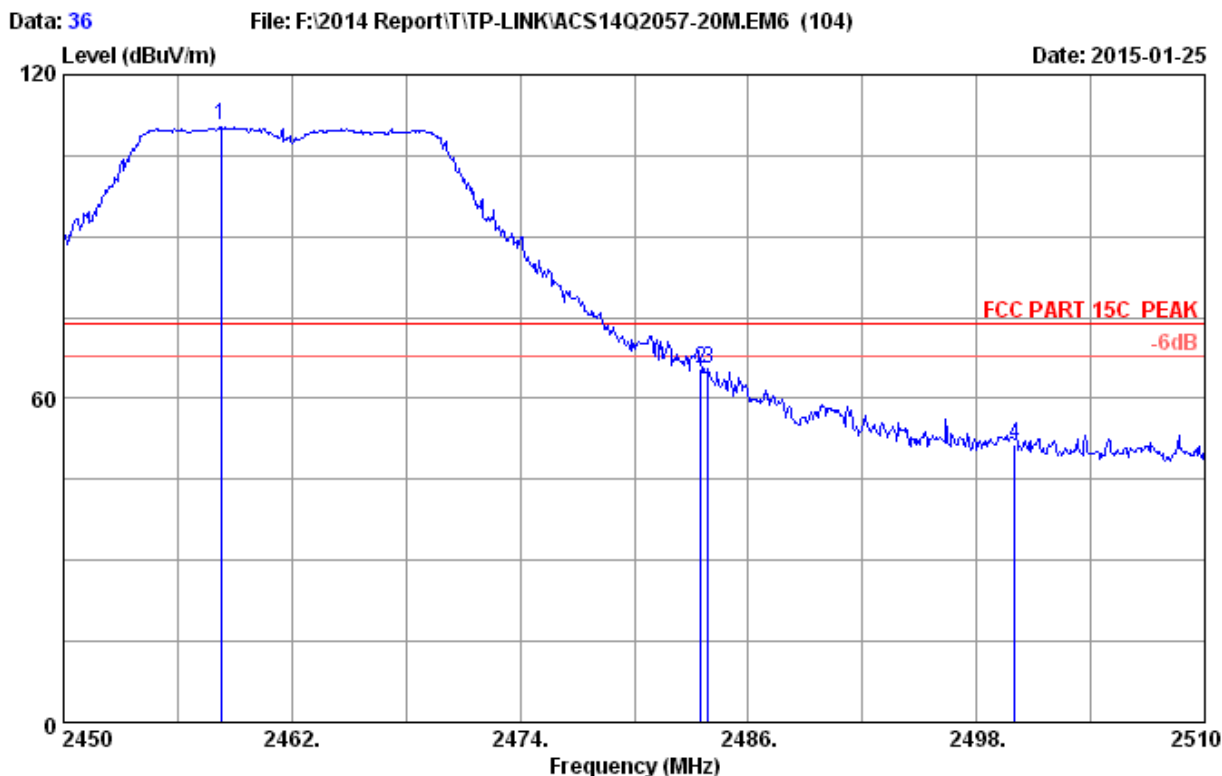

Site no. : 3m Chamber Data no. : 36
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2458.280	28.31	5.88	35.70	112.31	110.80	74.00	-36.80	Peak
2	2483.500	28.36	5.92	35.70	67.01	65.59	74.00	8.41	Peak
3	2483.900	28.36	5.92	35.70	67.03	65.61	74.00	8.39	Peak
4	2500.000	28.40	5.94	35.70	52.94	51.58	74.00	22.42	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

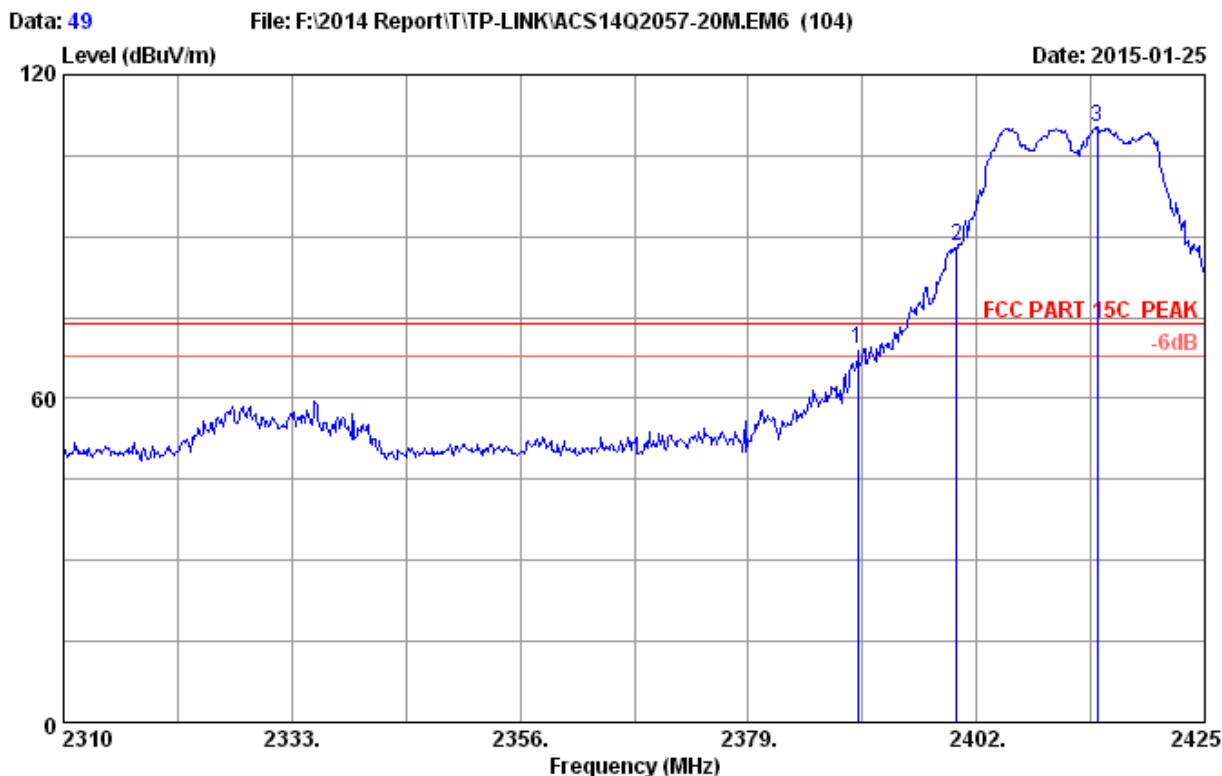

Site no. : 3m Chamber Data no. : 49
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	28.16	5.78	35.70	70.82	69.06	74.00	4.94	Peak
2	2400.000	28.18	5.80	35.70	90.03	88.31	74.00	-14.31	Peak
3	2414.190	28.21	5.82	35.70	112.00	110.33	74.00	-36.33	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

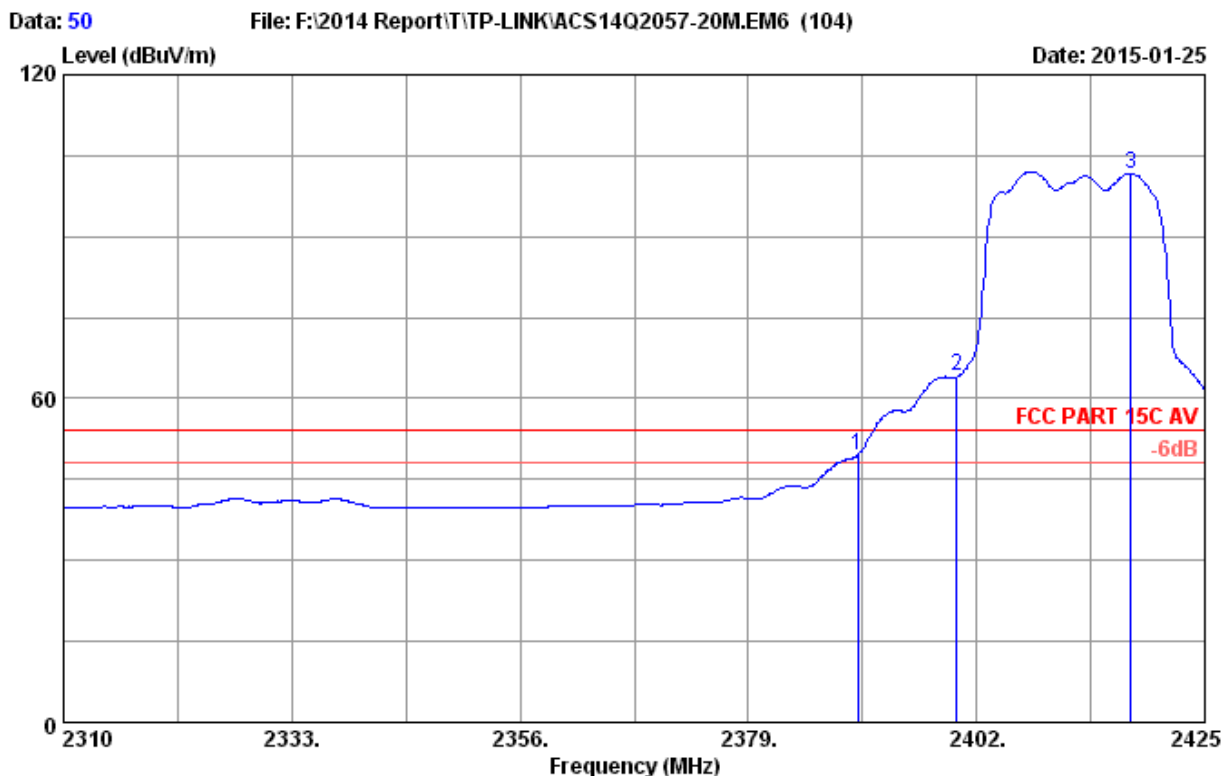

Site no. : 3m Chamber Data no. : 50
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	28.16	5.78	35.70	51.12	49.36	54.00	4.64	Average
2	2400.000	28.18	5.80	35.70	65.84	64.12	54.00	-10.12	Average
3	2417.525	28.22	5.82	35.70	103.32	101.66	54.00	-47.66	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

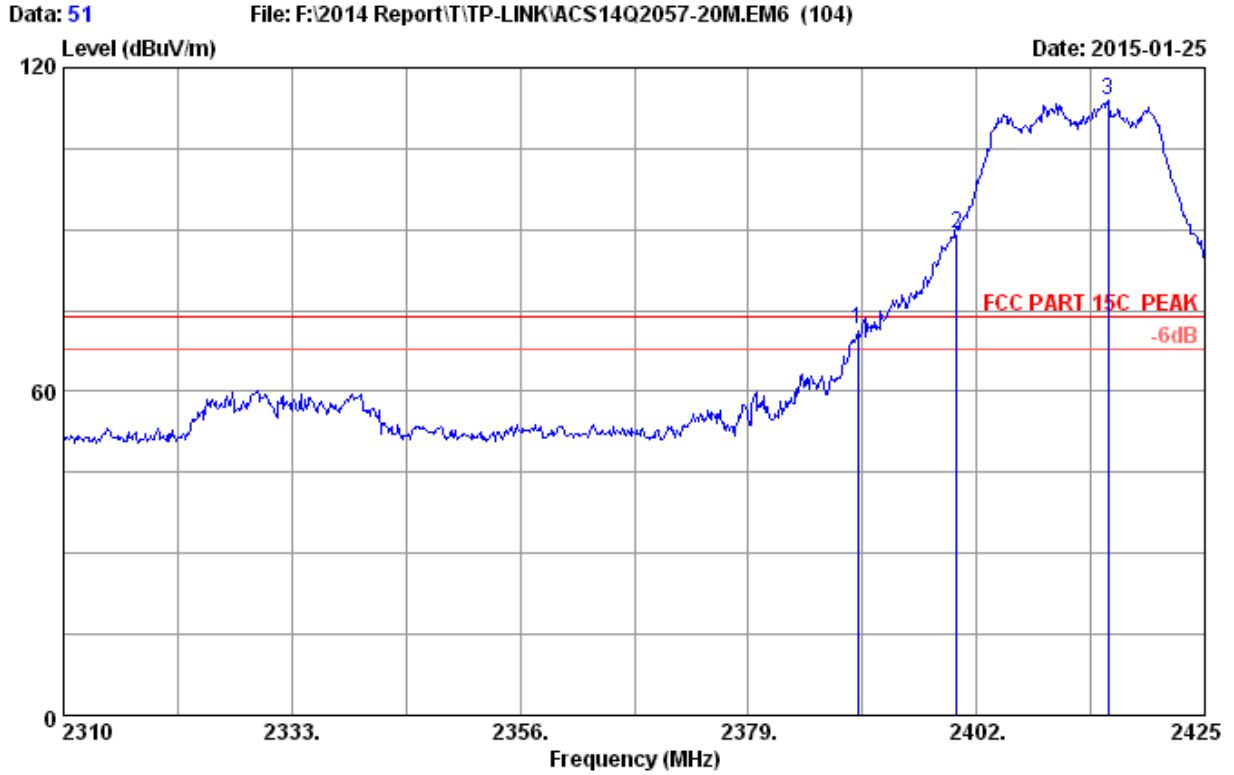

Site no. : 3m Chamber Data no. : 51
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	28.16	5.78	35.70	73.35	71.59	74.00	2.41	Peak
2	2400.000	28.18	5.80	35.70	91.02	89.30	74.00	-15.30	Peak
3	2415.225	28.21	5.82	35.70	115.50	113.83	74.00	-39.83	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

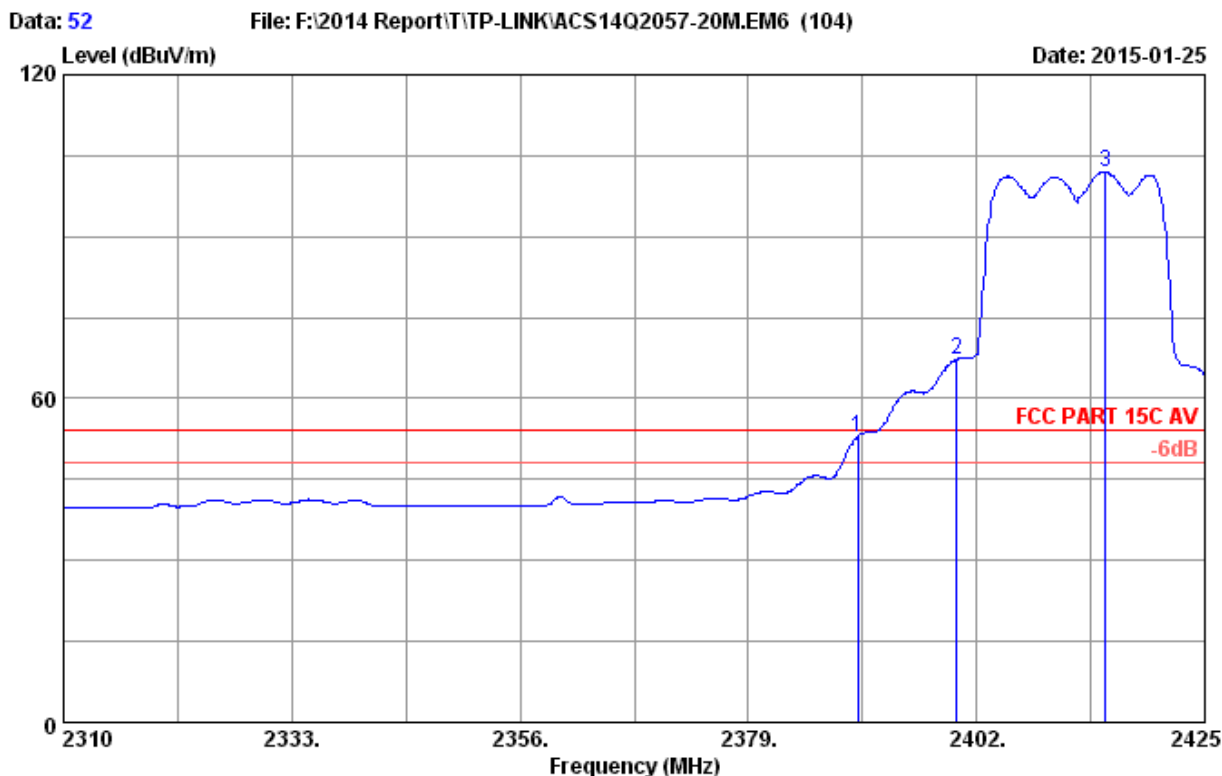

Site no. : 3m Chamber Data no. : 52
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	28.16	5.78	35.70	54.62	52.86	54.00	1.14	Average
2	2400.000	28.18	5.80	35.70	68.76	67.04	54.00	-13.04	Average
3	2414.995	28.21	5.82	35.70	103.64	101.97	54.00	-47.97	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

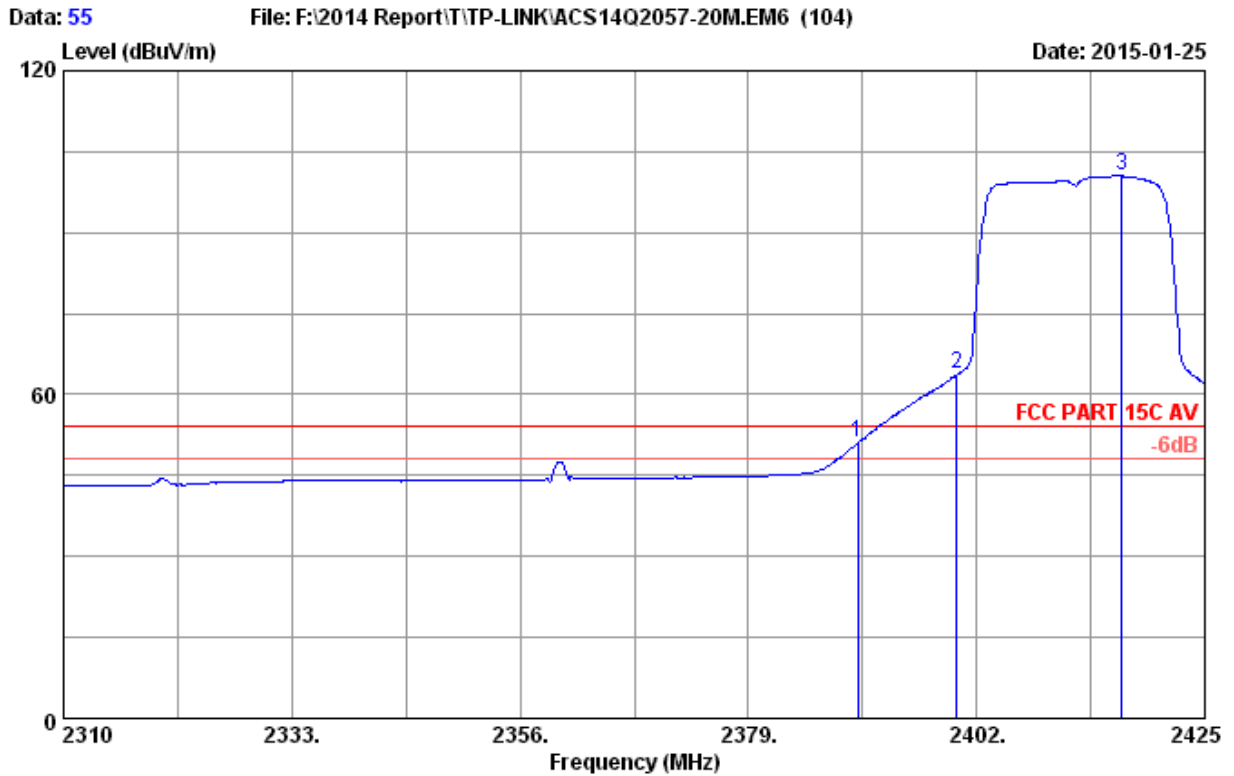

Site no. : 3m Chamber Data no. : 55
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	28.16	5.78	35.70	52.88	51.12	54.00	2.88	Average
2	2400.000	28.18	5.80	35.70	65.62	63.90	54.00	-9.90	Average
3	2416.605	28.22	5.82	35.70	102.38	100.72	54.00	-46.72	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

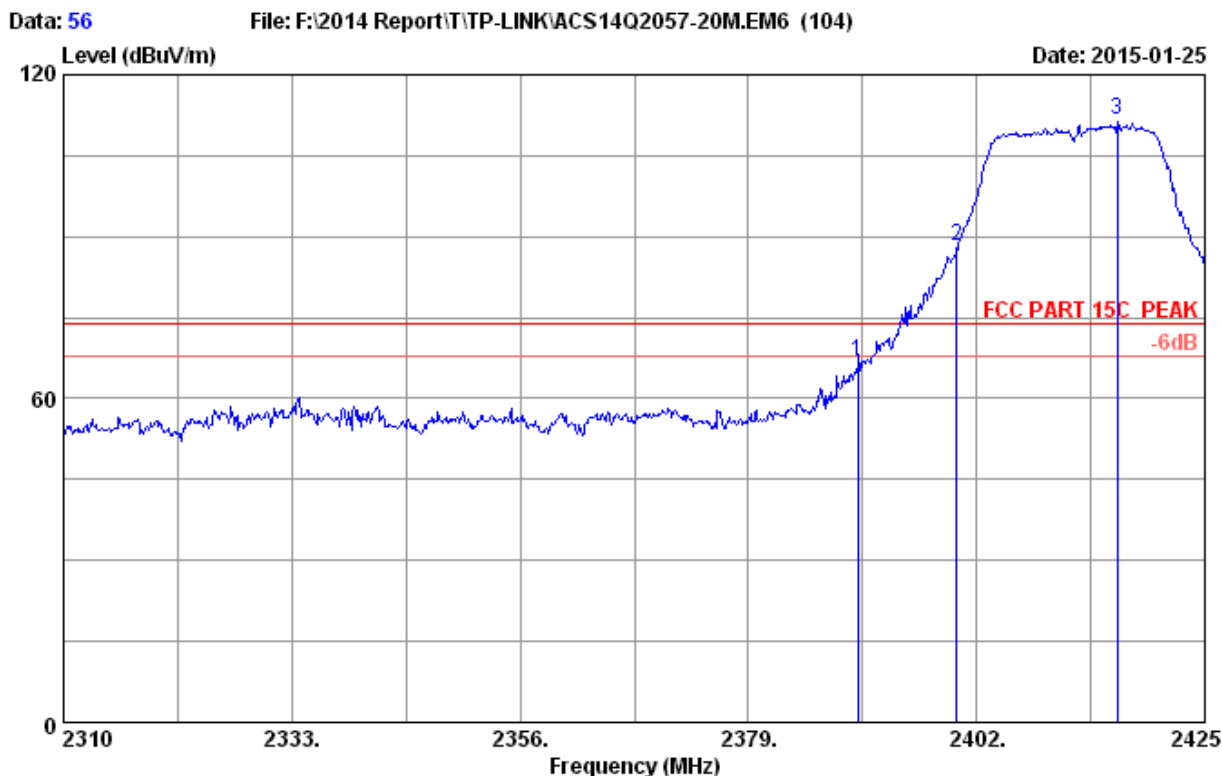

Site no. : 3m Chamber Data no. : 56
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	28.16	5.78	35.70	68.52	66.76	74.00	7.24	Peak
2	2400.000	28.18	5.80	35.70	90.01	88.29	74.00	-14.29	Peak
3	2416.145	28.22	5.82	35.70	113.25	111.59	74.00	-37.59	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

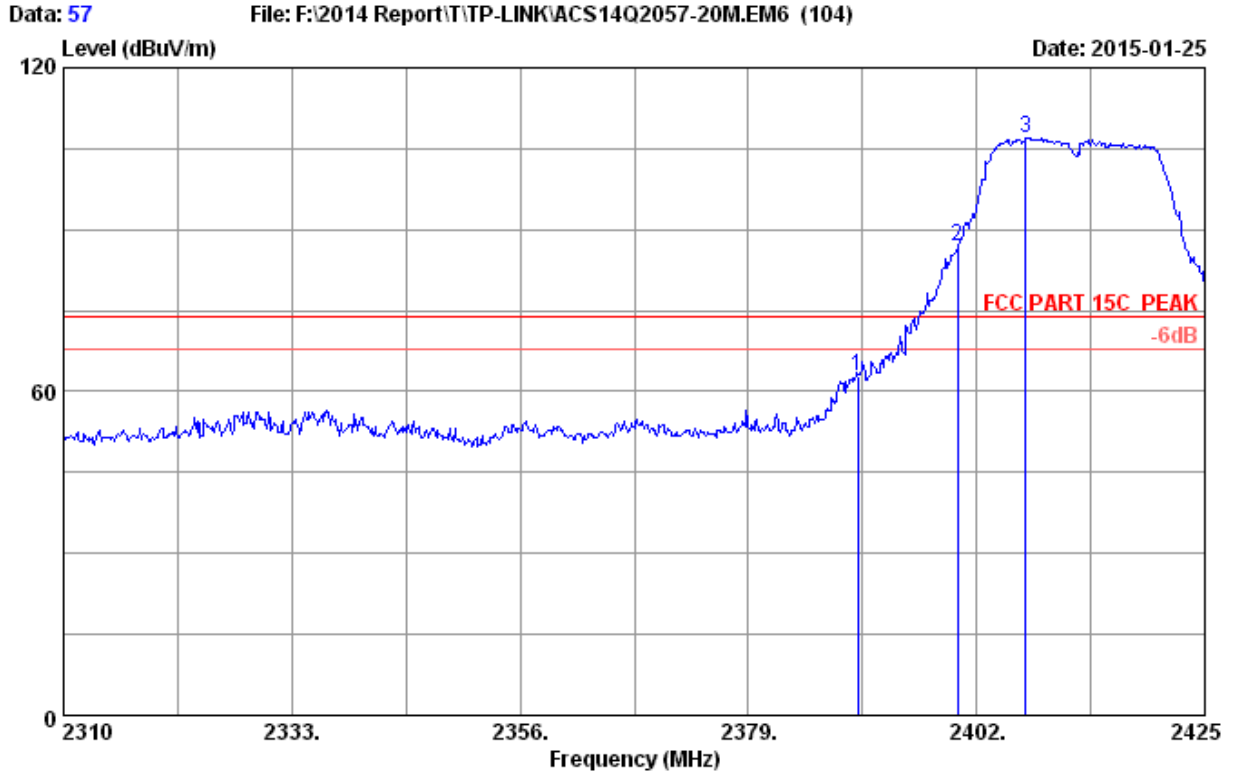

Site no. : 3m Chamber Data no. : 57
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	28.16	5.78	35.70	64.44	62.68	74.00	11.32	Peak
2	2400.045	28.18	5.80	35.70	88.47	86.75	74.00	-12.75	Peak
3	2406.945	28.20	5.81	35.70	108.56	106.87	74.00	-32.87	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

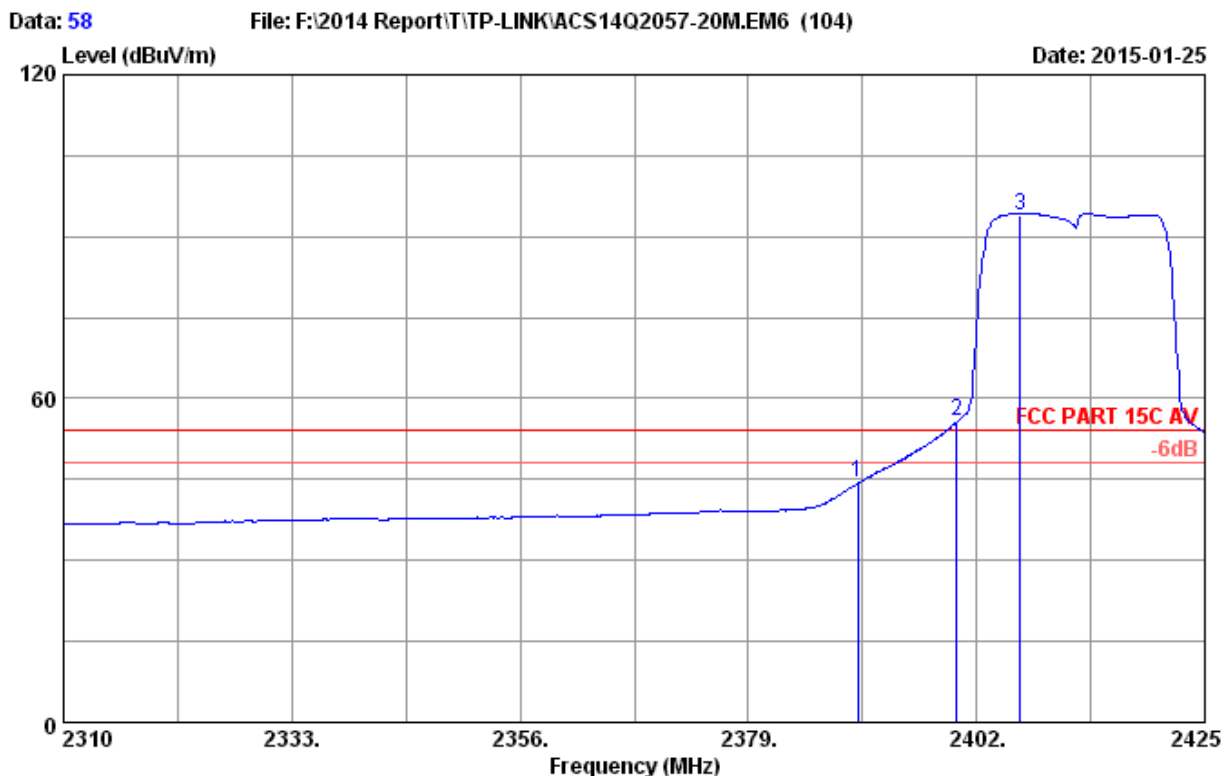

Site no. : 3m Chamber Data no. : 58
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2412MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	28.16	5.78	35.70	46.31	44.55	54.00	9.45	Average
2	2400.000	28.18	5.80	35.70	57.49	55.77	54.00	-1.77	Average
3	2406.370	28.19	5.81	35.70	95.75	94.05	54.00	-40.05	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

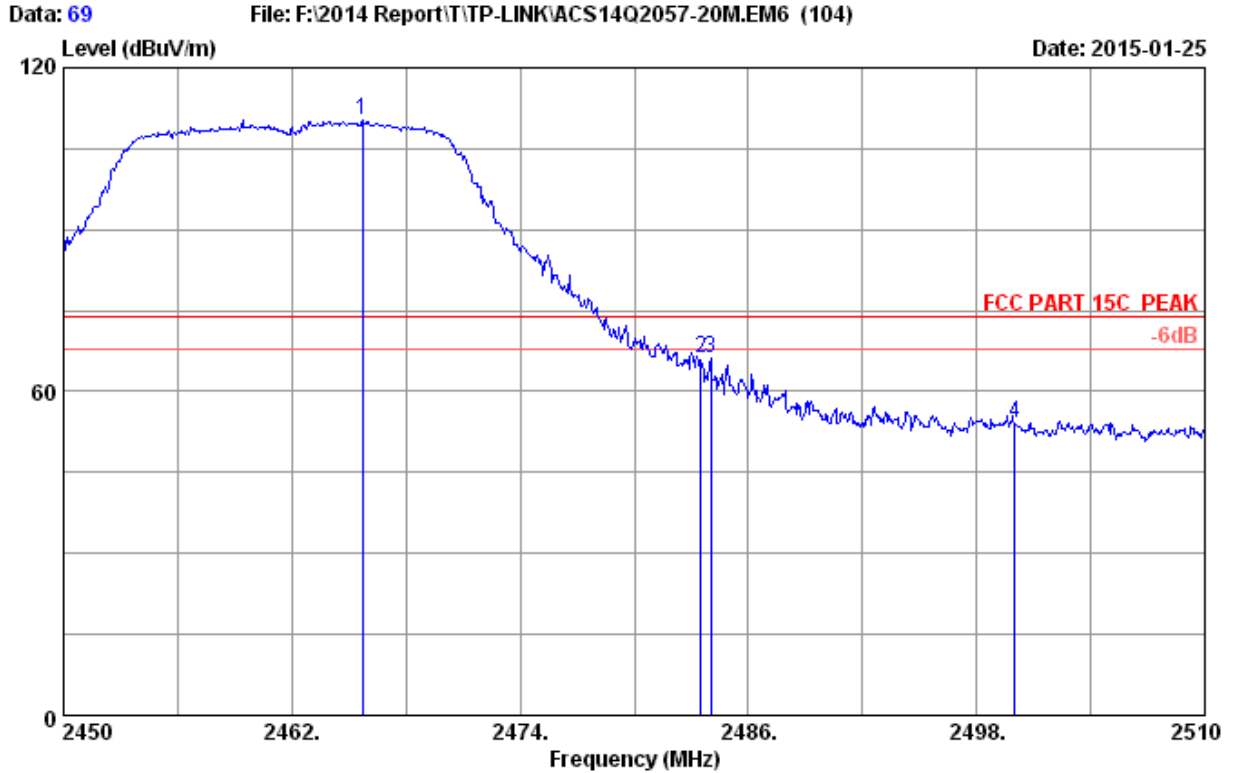

Site no. : 3m Chamber Data no. : 69
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2465.720	28.32	5.89	35.70	111.75	110.26	74.00	-36.26	Peak
2	2483.500	28.36	5.92	35.70	67.48	66.06	74.00	7.94	Peak
3	2484.020	28.36	5.92	35.70	67.54	66.12	74.00	7.88	Peak
4	2500.000	28.40	5.94	35.70	55.48	54.12	74.00	19.88	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

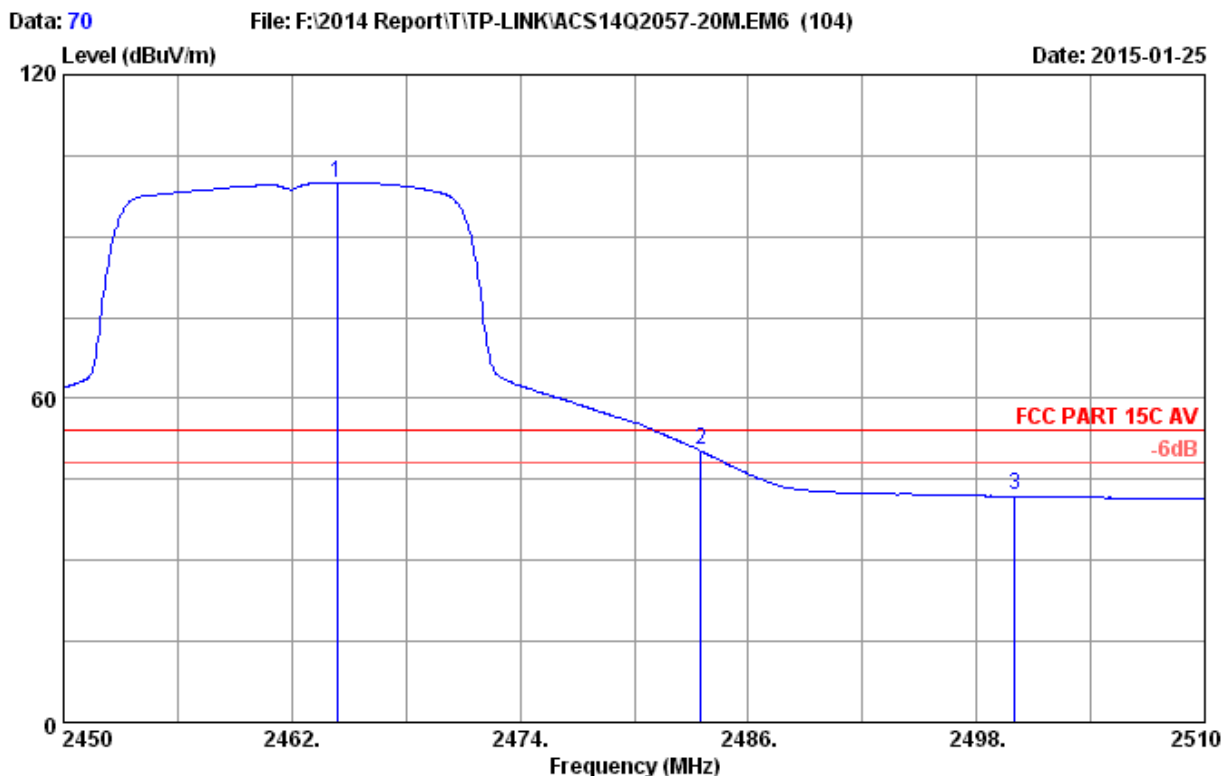

Site no. : 3m Chamber Data no. : 70
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2464.400	28.32	5.89	35.70	101.59	100.10	54.00	-46.10	Average
2	2483.500	28.36	5.92	35.70	51.74	50.32	54.00	3.68	Average
3	2500.000	28.40	5.94	35.70	43.59	42.23	54.00	11.77	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

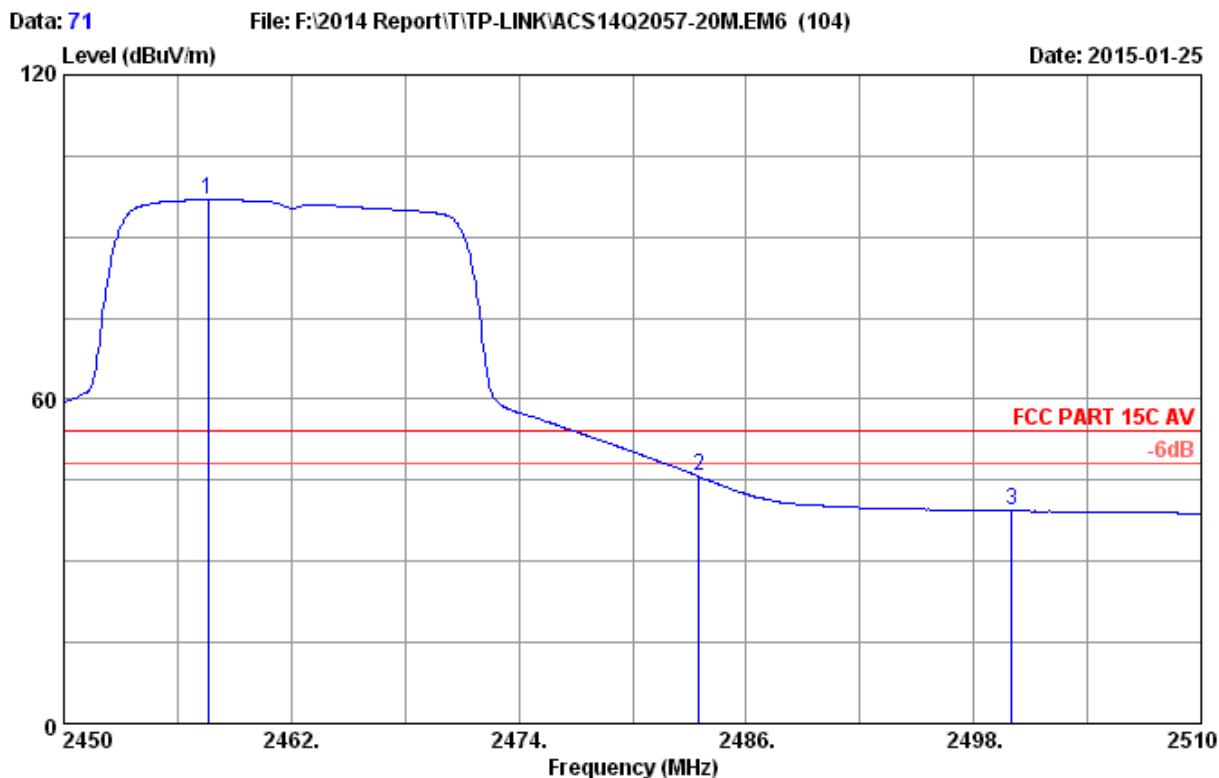

Site no. : 3m Chamber Data no. : 71
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2457.620	28.31	5.88	35.70	98.41	96.90	54.00	-42.90	Average
2	2483.500	28.36	5.92	35.70	47.12	45.70	54.00	8.30	Average
3	2500.000	28.40	5.94	35.70	40.85	39.49	54.00	14.51	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

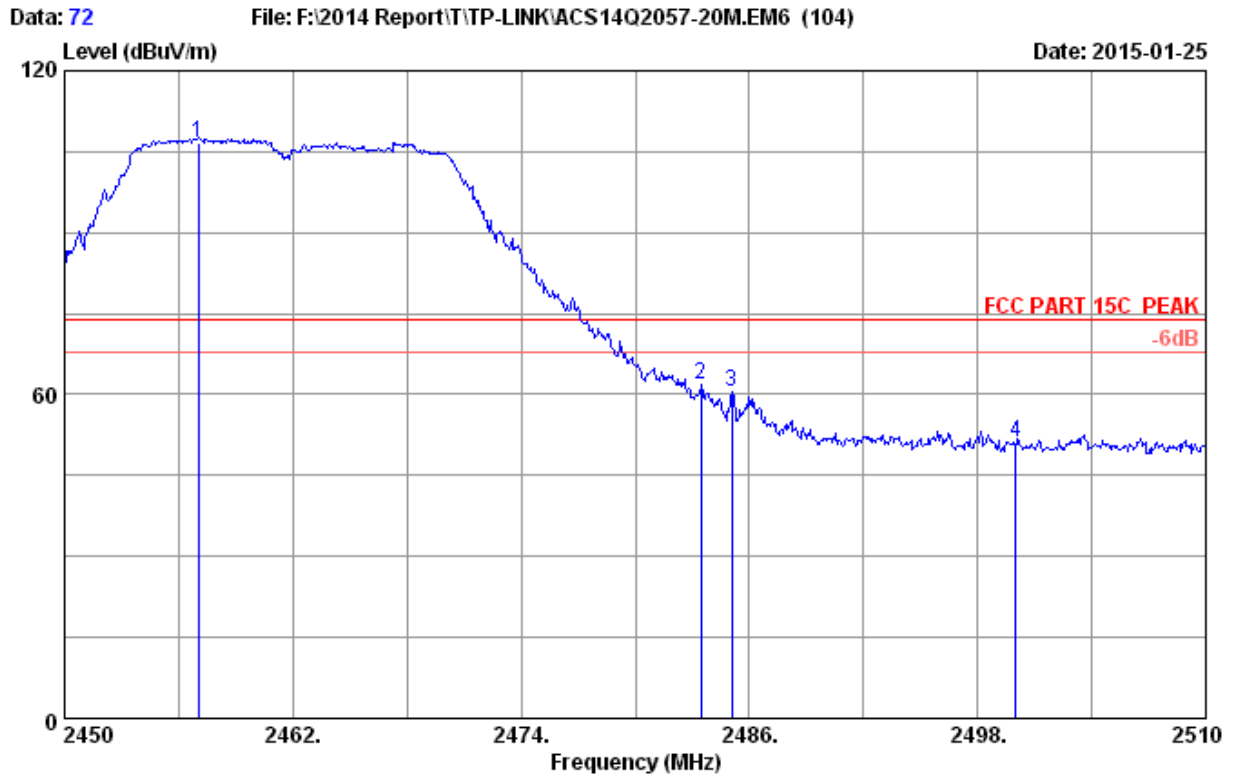


Site no. : 3m Chamber Data no. : 72
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2462MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2457.020	28.31	5.88	35.70	108.22	106.71	74.00	-32.71	Peak
2	2483.480	28.36	5.92	35.70	63.16	61.74	74.00	12.26	Peak
3	2485.100	28.37	5.92	35.70	62.05	60.64	74.00	13.36	Peak
4	2500.000	28.40	5.94	35.70	52.51	51.15	74.00	22.85	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.


40MHz

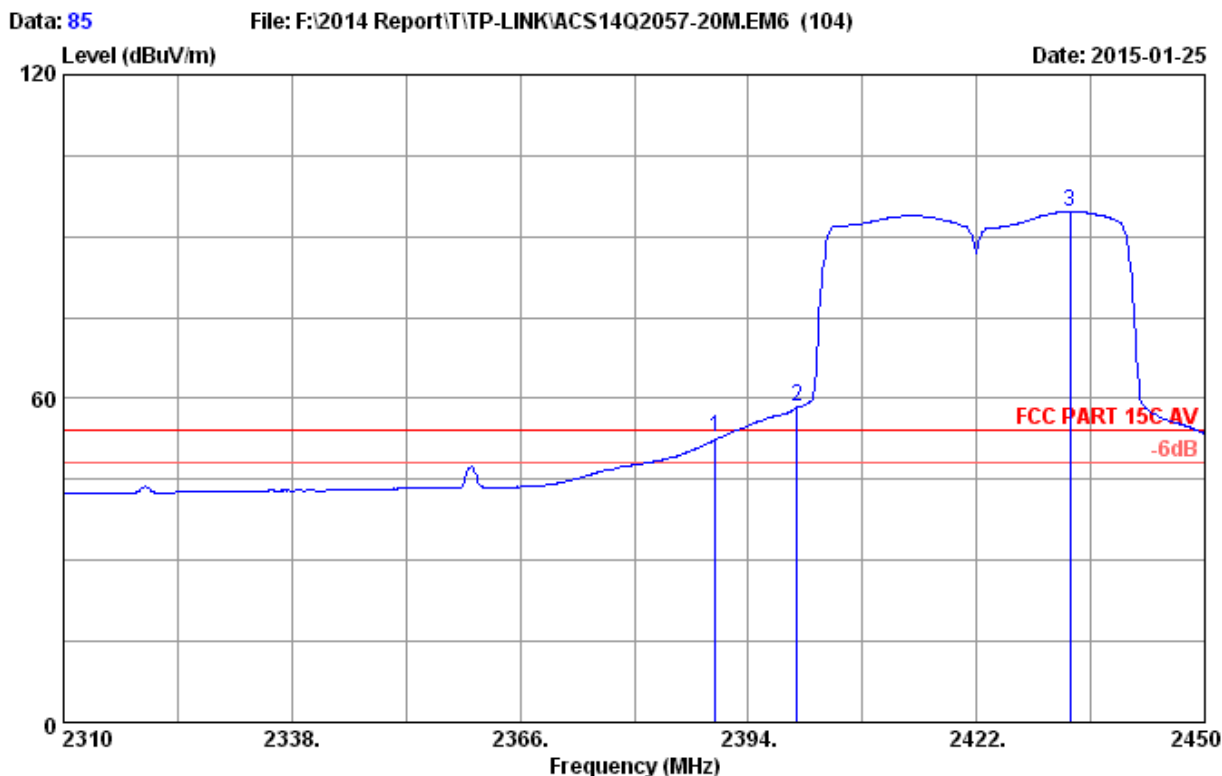

Site no. : 3m Chamber Data no. : 85
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2422MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	28.16	5.78	35.70	54.41	52.65	54.00	1.35	Average
2	2400.000	28.18	5.80	35.70	60.29	58.57	54.00	-4.57	Average
3	2433.480	28.25	5.85	35.70	96.25	94.65	54.00	-40.65	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

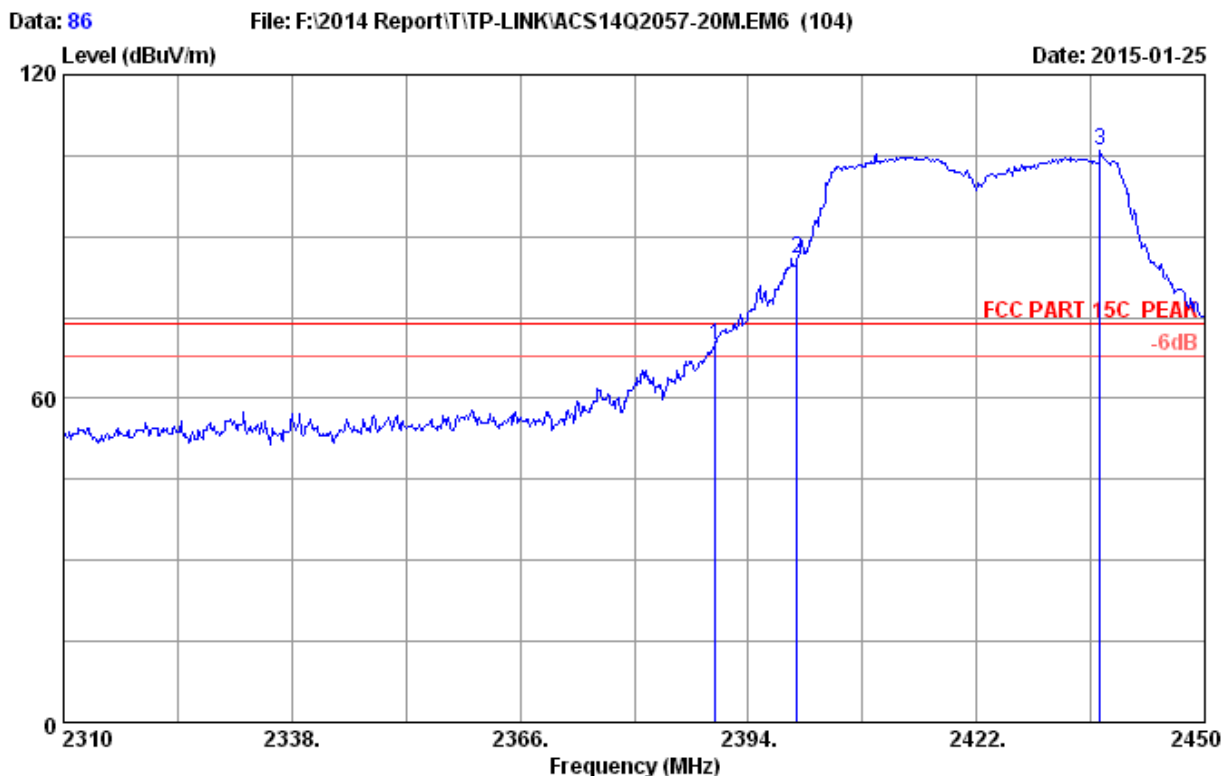

Site no. : 3m Chamber Data no. : 86
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2422MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	28.16	5.78	35.70	71.75	69.99	74.00	4.01	Peak
2	2400.000	28.18	5.80	35.70	87.52	85.80	74.00	-11.80	Peak
3	2437.120	28.26	5.85	35.70	107.54	105.95	74.00	-31.95	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

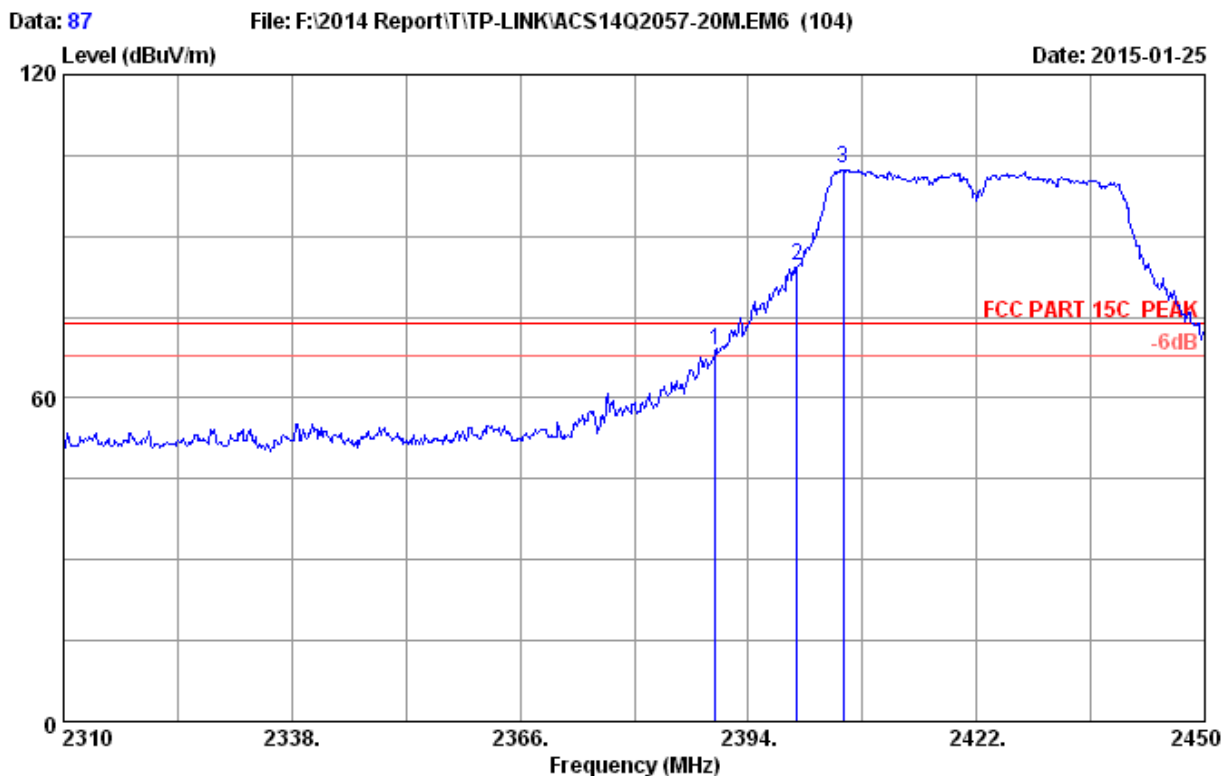

Site no. : 3m Chamber Data no. : 87
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2422MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	28.16	5.78	35.70	70.58	68.82	74.00	5.18	Peak
2	2400.000	28.18	5.80	35.70	86.13	84.41	74.00	-10.41	Peak
3	2405.620	28.19	5.81	35.70	104.22	102.52	74.00	-28.52	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

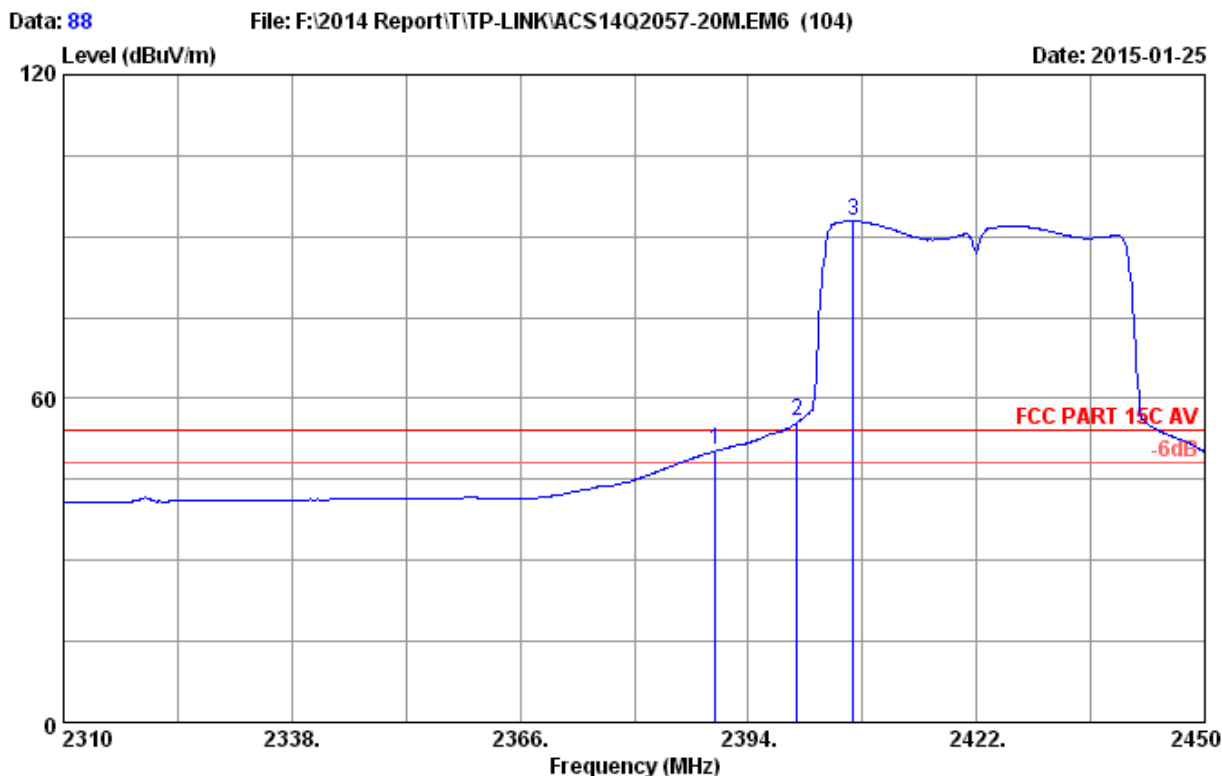

Site no. : 3m Chamber Data no. : 88
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2422MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	28.16	5.78	35.70	52.24	50.48	54.00	3.52	Average
2	2400.000	28.18	5.80	35.70	57.61	55.89	54.00	-1.89	Average
3	2406.880	28.20	5.81	35.70	94.64	92.95	54.00	-38.95	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

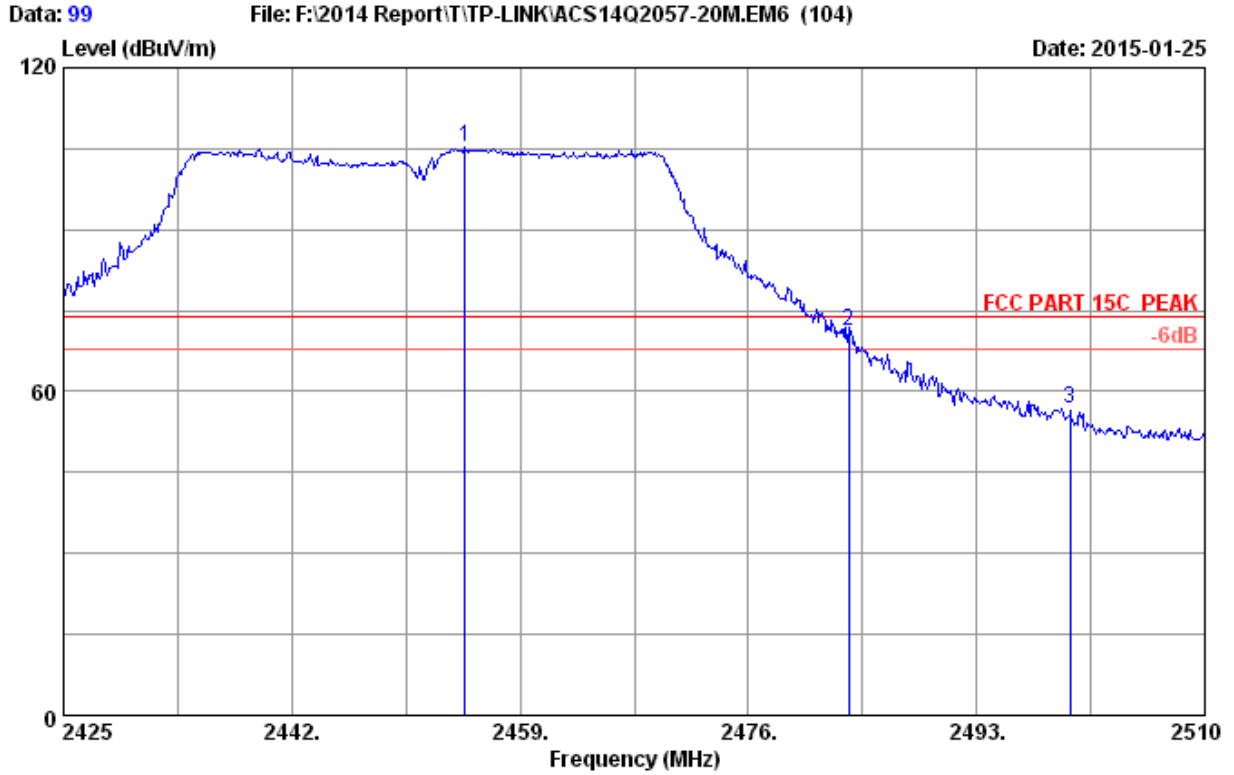

Site no. : 3m Chamber Data no. : 99
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2452MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2454.920	28.30	5.88	35.70	106.67	105.15	74.00	-31.15	Peak
2	2483.500	28.36	5.92	35.70	72.77	71.35	74.00	2.65	Peak
3	2500.000	28.40	5.94	35.70	58.26	56.90	74.00	17.10	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

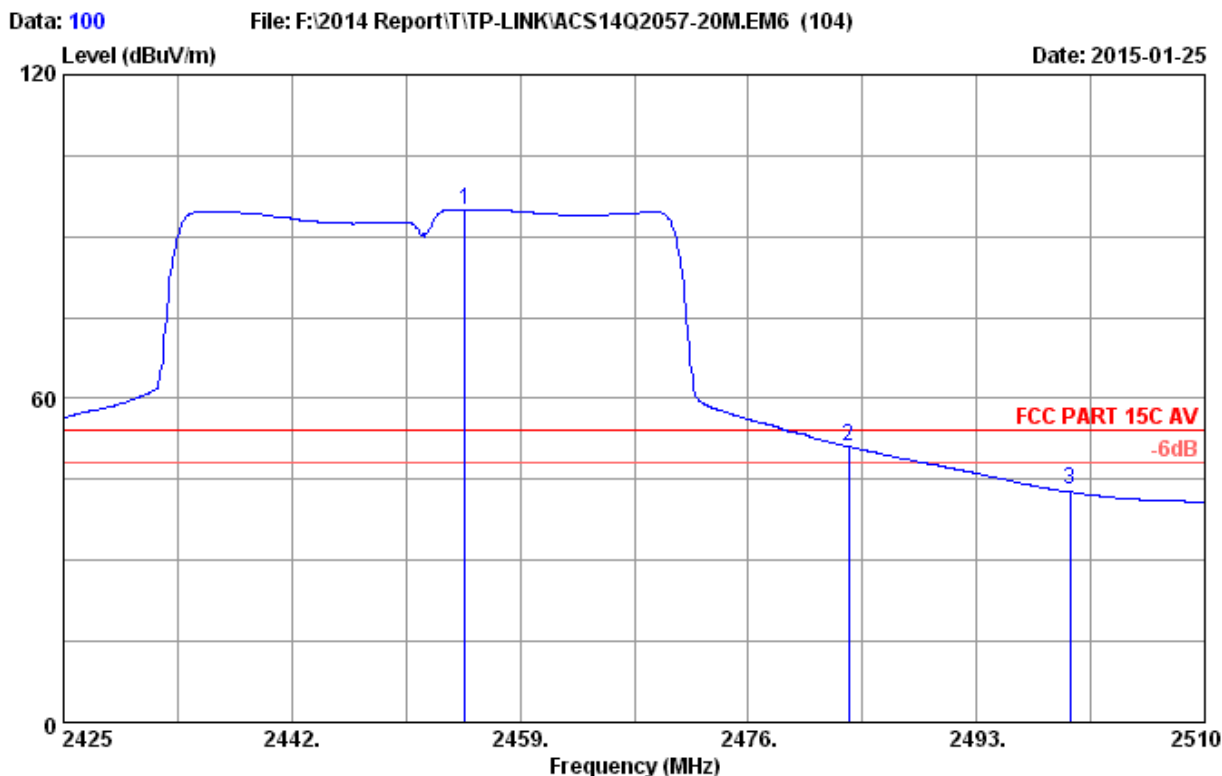

Site no. : 3m Chamber Data no. : 100
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2452MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2454.920	28.30	5.88	35.70	96.56	95.04	54.00	-41.04	Average
2	2483.500	28.36	5.92	35.70	52.66	51.24	54.00	2.76	Average
3	2500.000	28.40	5.94	35.70	44.39	43.03	54.00	10.97	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

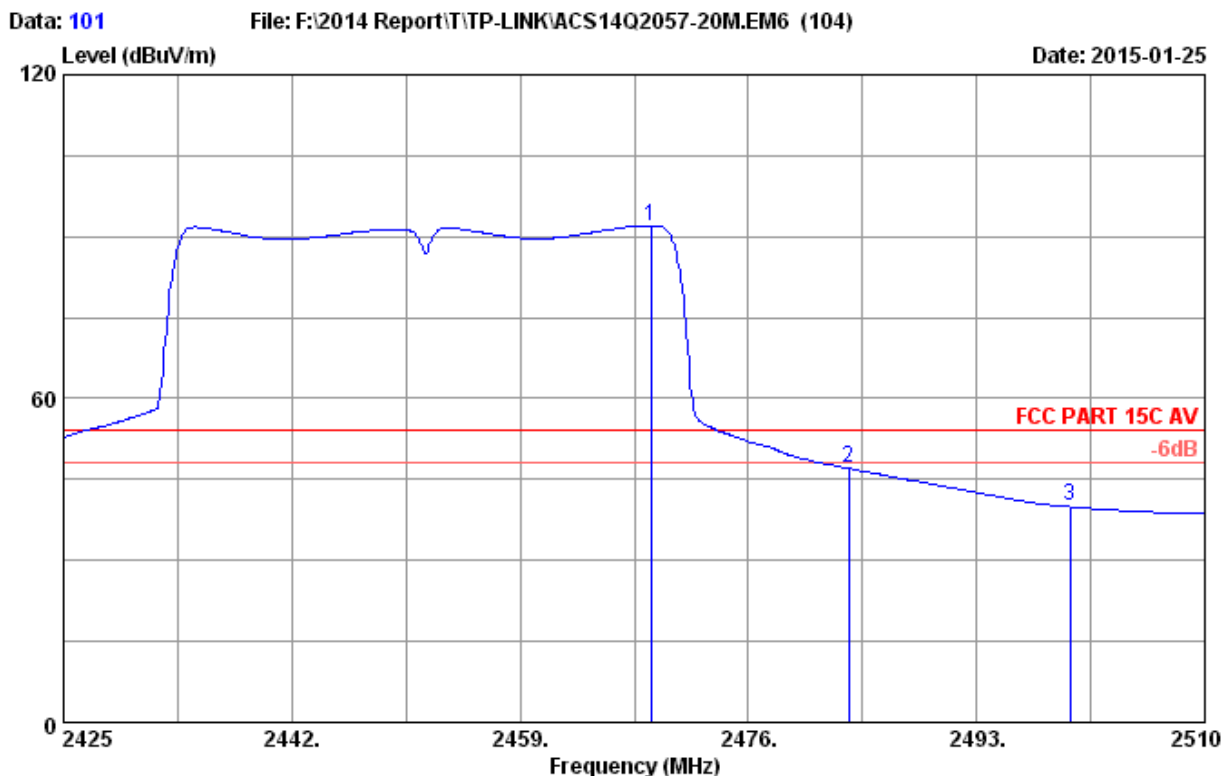

Site no. : 3m Chamber Data no. : 101
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23*C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2452MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2468.775	28.33	5.90	35.70	93.51	92.04	54.00	-38.04	Average
2	2483.500	28.36	5.92	35.70	48.65	47.23	54.00	6.77	Average
3	2500.000	28.40	5.94	35.70	41.39	40.03	54.00	13.97	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

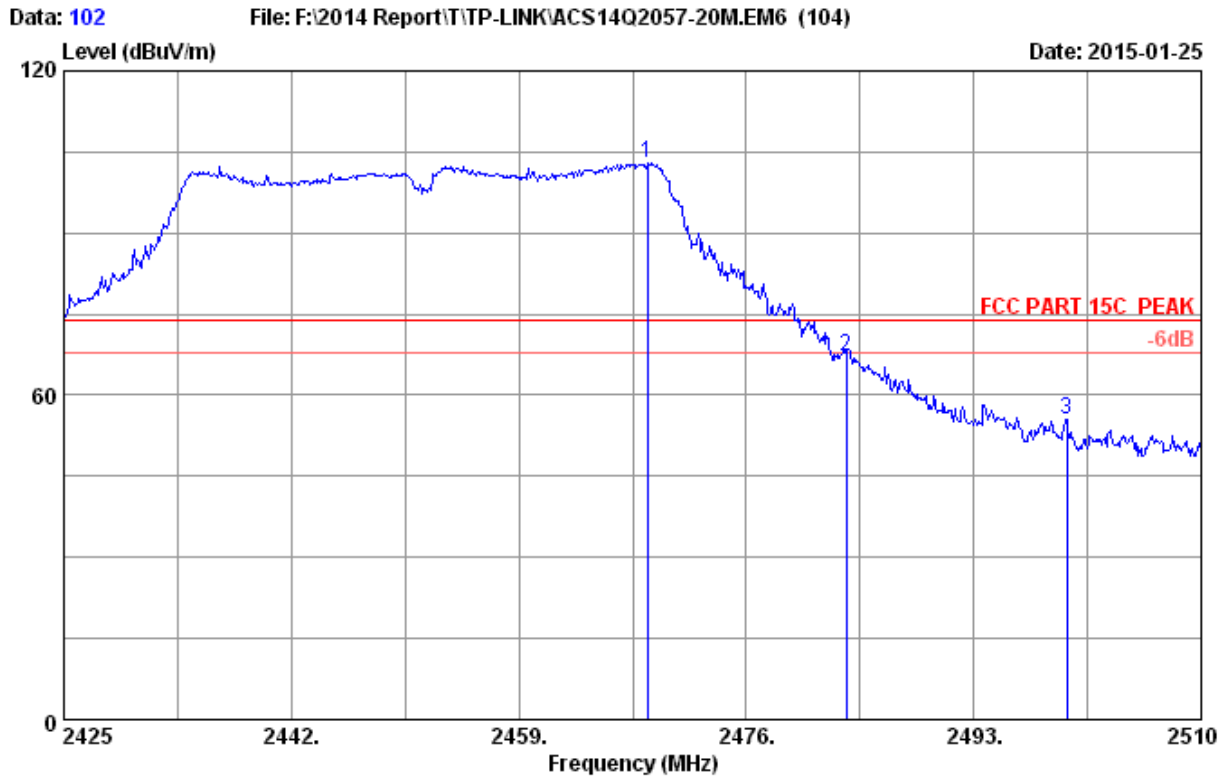

Site no. : 3m Chamber Data no. : 102
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Alice_Yang
 EUT : 2.4GHz 300Mbps 9dBi Outdoor CPE
 Power rating : DC 24V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2452MHz Tx
 M/N : CPE210

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2468.605	28.33	5.90	35.70	104.29	102.82	74.00	-28.82	Peak
2	2483.500	28.36	5.92	35.70	68.77	67.35	74.00	6.65	Peak
3	2500.000	28.40	5.94	35.70	56.85	55.49	74.00	18.51	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

6. OUTPUT POWER TEST

6.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	E4446A	US44300459	Apr.28,14	1 Year
2.	Spectrum	Agilent	N9030A	MY51380221	Oct.29,14	1Year
3.	Power meter	Anritsu	ML2487A	6K00002472	Aug.20,14	1Year
4.	Power sensor	Anritsu	MA2491A	0033005	Aug.20,14	1Year
5.	Attenuator (20dB)	Agilent	8491B	MY39262165	Apr.28,14	1 Year
6	RF Cable	Hubersuhner	SUCOFLEX102	28610/2	Apr.28,14	1 Year

6.2. Limit (FCC Part 15C 15.247 b(3))

For systems using digital modulation in the 2400—2483.5MHz, The Peak out put Power shall not exceed 1W(30dBm)

6.3. Test Procedure

- 1, Connected the EUT's antenna port to measure device by 20dB attenuator.
- 2, For IEEE 802.11b/g and IEEE802.11n HT20 mode, use a PK power meter which's bandwidth is 20MHz and above 26dB bandwidth of signal to measure out each test modes' PK output power.
- 3, For IEEE802.11n HT40 mode, because the signal's bandwidth is about 40MHz and above 20MHz bandwidth of power sensor ML2491A. So used the test method per KDB558074.
 - 1) Set the RBW=1MHz and VBW =3MHz
 - 2) Set the span $\geq 1.5 \times$ DTS bandwidth
 - 3) Detector = peak
 - 4) Sweep time = auto couple
 - 5) Trace Mode = max hold
 - 6) allow trace to fully stabilize
 - 7) use the spectrum analyser's integrated band power measurement function with band limits set equal to the DTS bandwidth edges.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

6.4. Test Results

5MHz

EUT: 2.4GHz 300Mbps 9dBi Outdoor CPE					
M/N: CPE210					
Test date: 2015-01-23		Pressure: 101.5±1.0 kpa		Humidity: 52.2±3.0%	
Tested by: Alice_yang		Test site: RF site		Temperature:21.5±0.6 °C	
Test Mode	CH (MHz)	Peak output Power (dBm)			Limit (dBm)
		J2	J3	Total	
11b	CH1	24.14	24.34	27.25	29
	CH6	24.03	24.46	27.26	29
	CH11	23.92	23.61	26.78	29
11g	CH1	24.11	24.18	27.16	29
	CH6	24.12	24.13	27.14	29
	CH11	24.10	24.55	27.34	29
11nHT20	CH1	24.23	24.57	27.41	28
	CH6	24.21	24.48	27.36	28
	CH11	24.11	24.26	27.20	28
Conclusion: PASS					

10MHz

EUT: 2.4GHz 300Mbps 9dBi Outdoor CPE					
M/N: CPE210					
Test date: 2015-01-24		Pressure: 101.6±1.0 kpa		Humidity: 51.9±3.0%	
Tested by: Alice_yang		Test site: RF site		Temperature:21.4±0.6 °C	
Test Mode	CH (MHz)	Peak output Power (dBm)			Limit (dBm)
		J2	J3	Total	
11b	CH1	24.56	24.05	27.32	29
	CH6	24.35	24.66	27.52	29
	CH11	24.21	24.18	27.21	29
11g	CH1	24.09	24.35	27.23	29
	CH6	24.46	24.58	27.53	29
	CH11	24.45	24.62	27.55	29
11nHT20	CH1	24.29	24.31	27.31	28
	CH6	24.26	24.11	27.20	28
	CH11	24.32	24.23	27.29	28
Conclusion: PASS					

20MHz

EUT: 2.4GHz 300Mbps 9dBi Outdoor CPE					
M/N: CPE210					
Test date: 2015-01-24		Pressure: 101.6±1.0 kpa		Humidity: 52.1±3.0%	
Tested by: Alice_yang		Test site: RF site		Temperature:21.7±0.6 °C	
Test Mode	CH (MHz)	Peak output Power (dBm)			Limit (dBm)
		J2	J3	Total	
11b	CH1	24.19	24.55	27.38	29
	CH6	24.38	24.63	27.52	29
	CH11	24.36	24.29	27.34	29
11g	CH1	24.27	25.57	27.98	29
	CH6	24.13	25.21	27.71	29
	CH11	24.22	25.39	27.85	29
11nHT20	CH1	22.34	22.96	25.67	28
	CH6	24.15	25.02	27.62	28
	CH11	22.56	22.51	25.55	28
Conclusion: PASS					

40MHz

EUT: 2.4GHz 300Mbps 9dBi Outdoor CPE					
M/N: CPE210					
Test date: 2015-01-25		Pressure: 101.2±1.0 kpa		Humidity: 52.7±3.0%	
Tested by: Alice_yang		Test site: RF site		Temperature:22.2±0.6 °C	
Test Mode	CH (MHz)	Peak output Power (dBm)			Limit (dBm)
		J2	J3	Total	
11nHT40	CH1	21.57	22.54	25.09	28
	CH4	24.44	25.06	27.77	28
	CH7	21.13	21.44	24.30	28
Conclusion: PASS					

Note: 1.IEEE802.11b/g use IDD Mode


the Directional (Gain= $G_{ANT} + \text{Array Gain}$ (Array gain=0dB)
=9dBi

2. IEEE802.11n Mode


the Directional (Gain= $G_{ANT} + 10\log(G_{ANT}/N_{SS})$
=9dBi+10log2
=12dBi

3.This is Point to Point device so the power limit for 11b/g Mode is 29dBi and 11n Mode is 28dBi


40MHz Antenna: J2
 Test Mode: IEEE 802.11n HT40
 Test CH1: 2422MHz

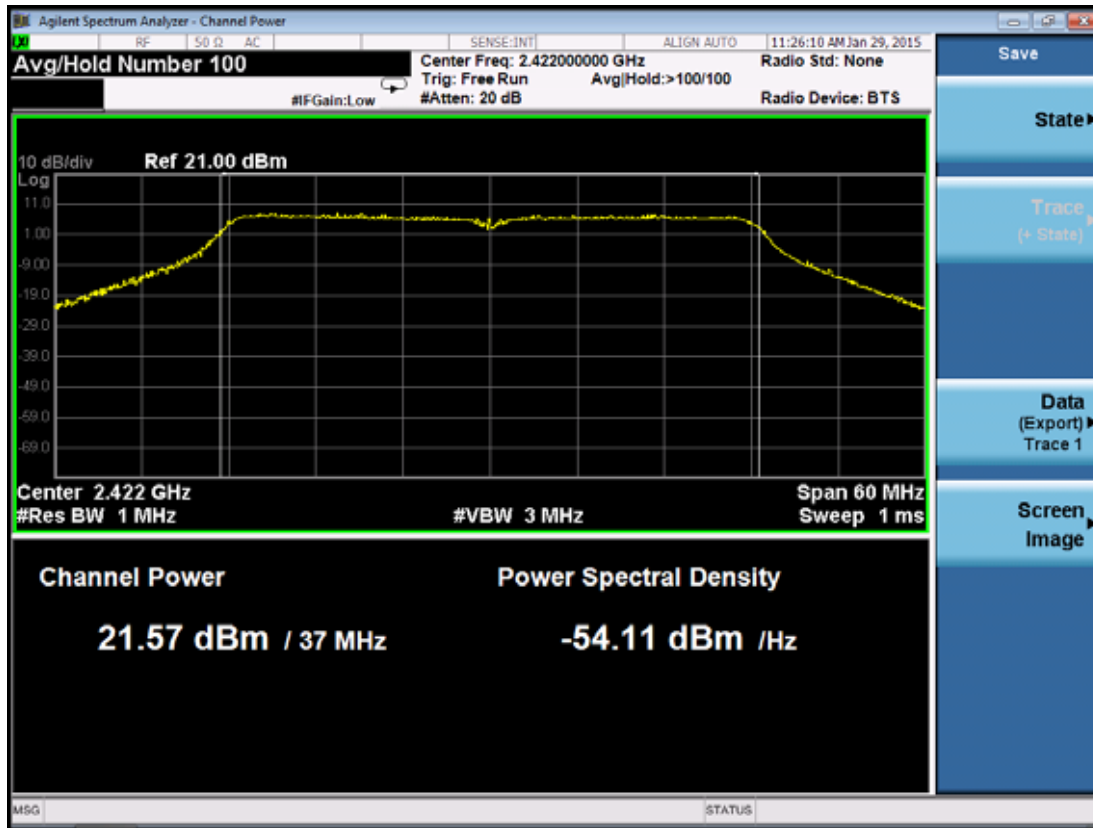

Test CH4: 2437MHz

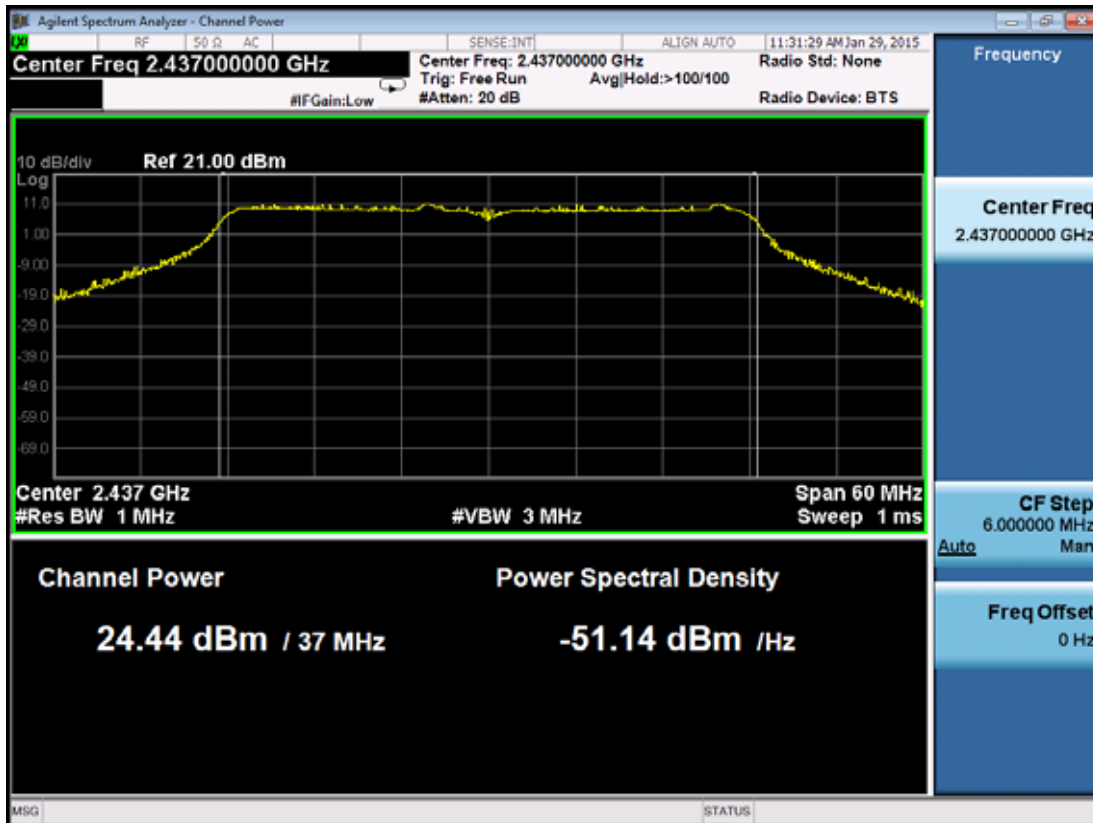


Test CH7: 2452MHz

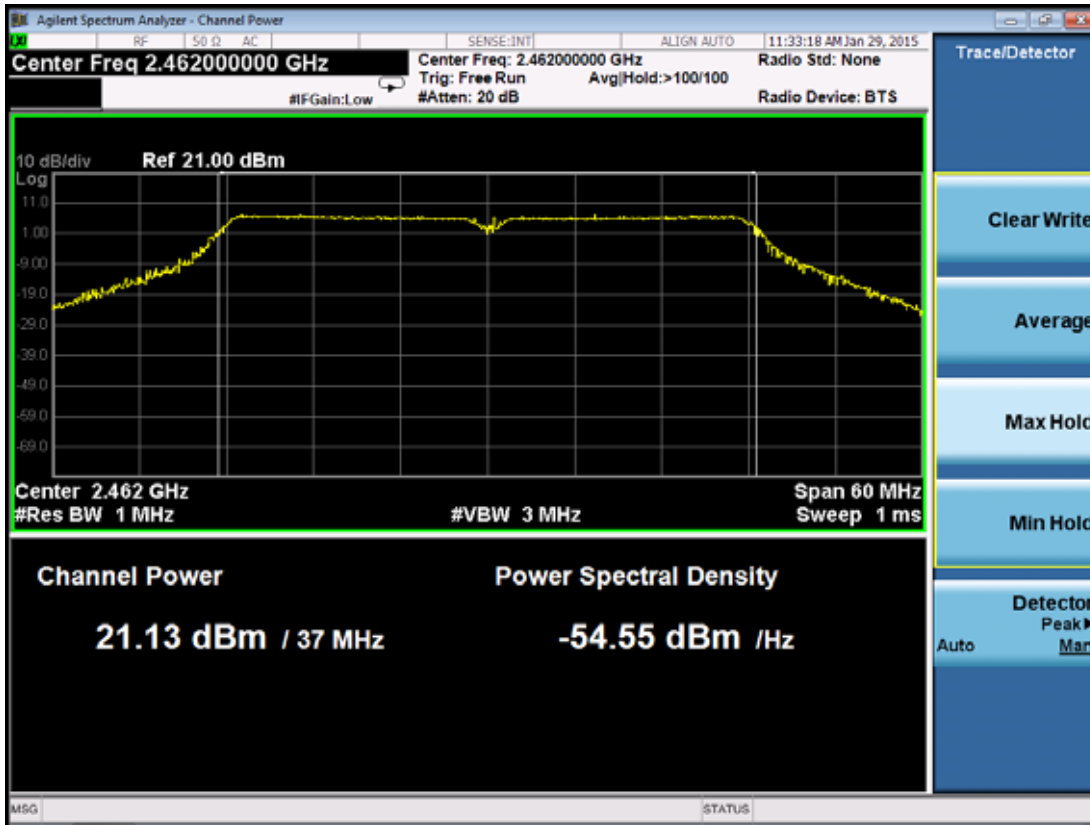


40MHz Antenna: J3

Test Mode: IEEE 802.11n HT40


Test CH1: 2422MHz

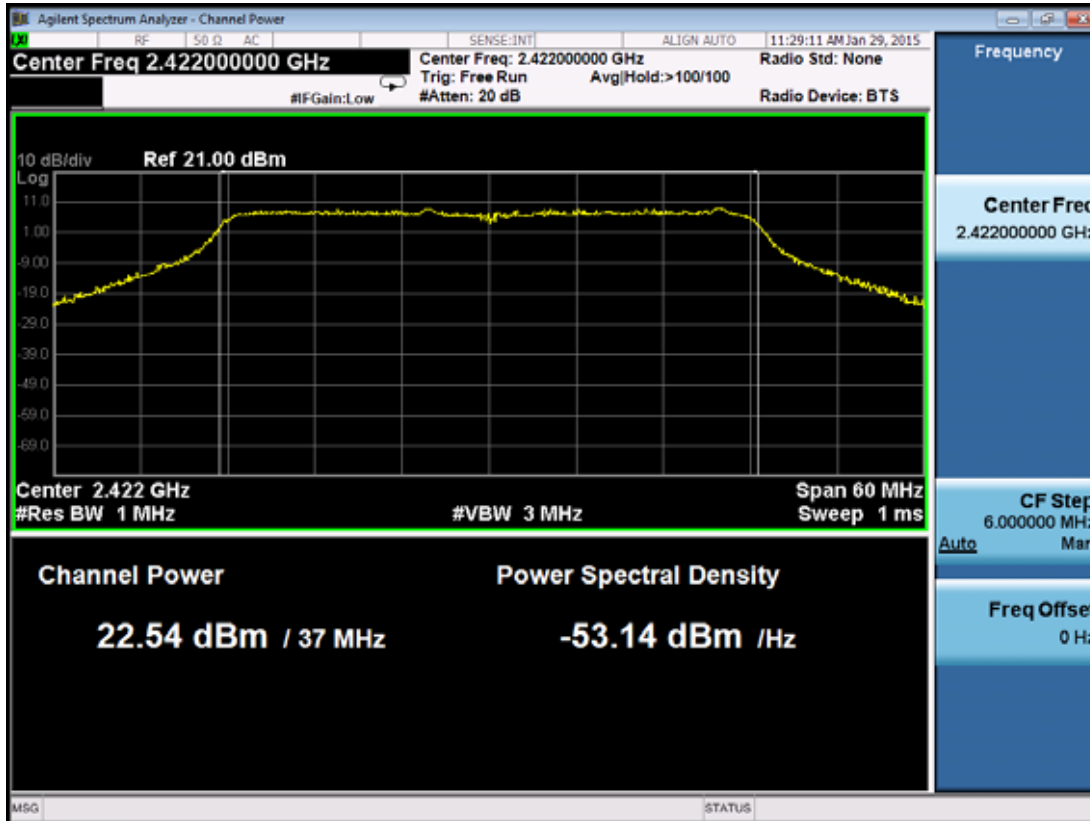

Test CH4: 2437MHz

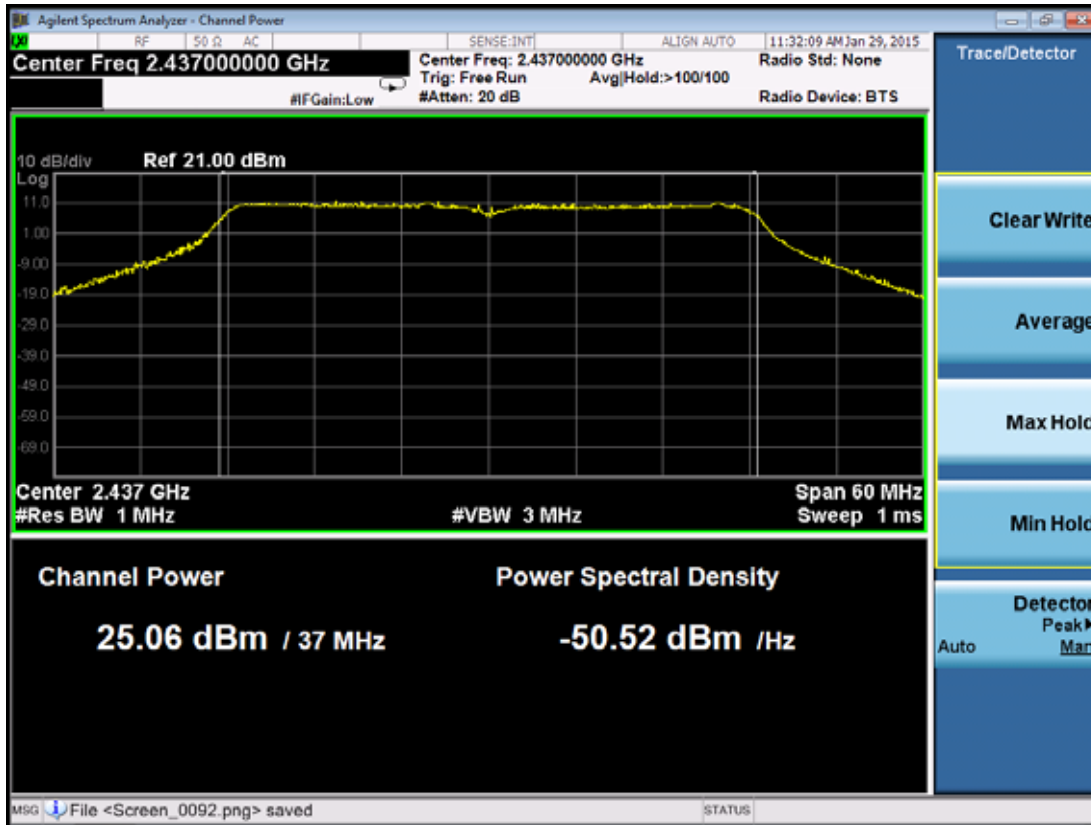

Test CH7: 2452MHz

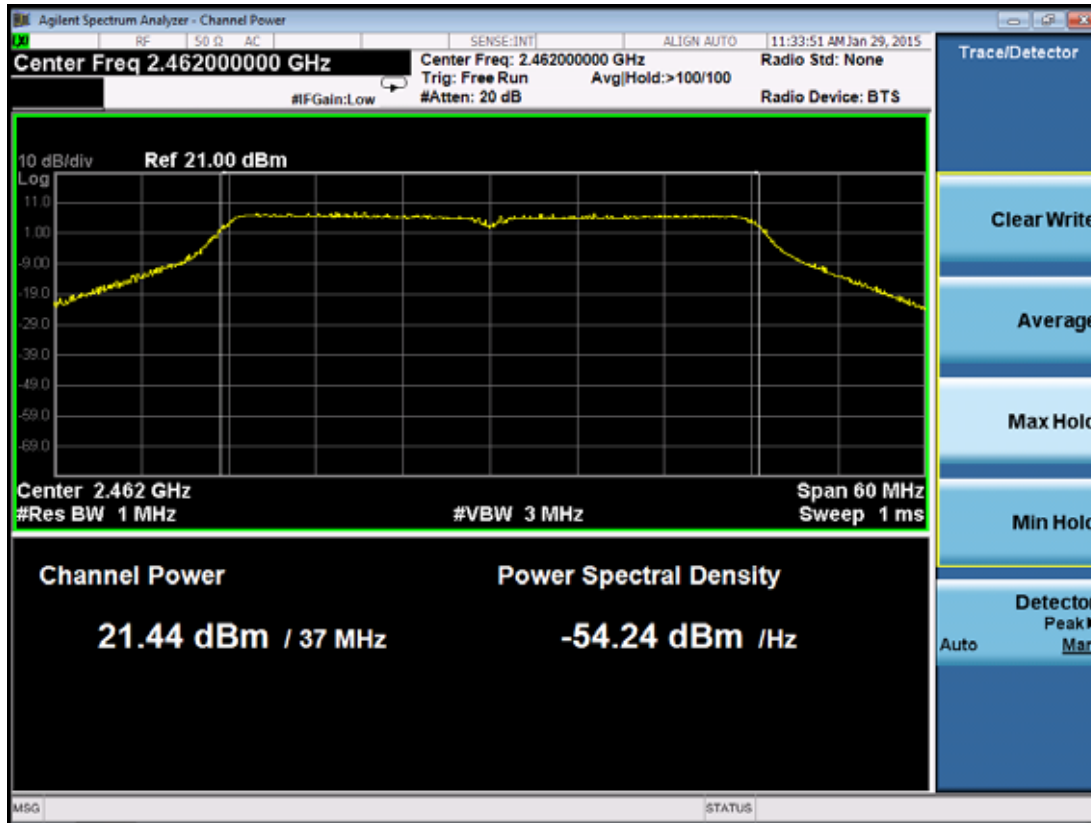

7. MPE ESTIMATION

7.1.Limit for General Population/ Uncontrolled Exposures

Frequency	Power density (mW/ cm ²)	Averaging time(minutes)
300MHz----1.5GHz	F/1500	30
1.5GHz---100GHz	1.0	30

Frequency(MHz)	Power density (mW/ cm ²)	Averaging time(minutes)
2412	1	30
2437	1	30
2462	1	30

Note: F= Frequency in MHz Estimation Result

5MHz

EUT: 2.4GHz 300Mbps 9dBi Outdoor CPE		
M/N: CPE210		
Test date: 2015-01-24	Pressure: 101.3±1.0 kpa	Humidity: 52.3±3.0%
Tested by: Leo-Li	Test site: RF site	Temperature: 21.9±0.6 °C
Antenna Gain: 9dBi		

Test Mode	CH	Frequency (MHz)	Peak Output Power (dBm)	Output Power (mW)	Antenna Gain (dBi)	Antenna Gain (Linear)	MPE
11b	CH1	2412	27.25	530.88	9	7.94	0.8394
	CH6	2437	27.26	532.11	9	7.94	0.8413
	CH11	2462	26.78	476.43	9	7.94	0.7533
11g	CH1	2412	27.16	520.00	9	7.94	0.8221
	CH6	2437	27.14	517.61	9	7.94	0.8184
	CH11	2462	27.34	542.00	9	7.94	0.8569
11n HT20	CH1	2412	27.41	550.81	9	7.94	0.8709
	CH6	2437	27.36	544.50	9	7.94	0.8609
	CH11	2462	27.20	524.81	9	7.94	0.8298

10MHz

EUT: 2.4GHz 300Mbps 9dBi Outdoor CPE							
M/N: CPE210							
Test date: 2015-01-24			Pressure: 101.3±1.0 kpa			Humidity: 52.6±3.0%	
Tested by: Leo-Li			Test site: RF site			Temperature: 22.4±0.6 °C	

Test Mode	CH	Frequency (MHz)	Peak Output Power (dBm)	Output Power (mW)	Antenna Gain (dBi)	Antenna Gain (Linear)	MPE
11b	CH1	2412	27.32	539.51	9	7.94	0.8530
	CH6	2437	27.52	564.94	9	7.94	0.8932
	CH11	2462	27.21	526.02	9	7.94	0.8317
11g	CH1	2412	27.23	528.45	9	7.94	0.8355
	CH6	2437	27.53	566.24	9	7.94	0.8953
	CH11	2462	27.55	568.85	9	7.94	0.8994
11n HT20	CH1	2412	27.31	538.27	9	7.94	0.8510
	CH6	2437	27.20	524.81	9	7.94	0.8298
	CH11	2462	27.29	535.80	9	7.94	0.8471

20MHz

Test Mode	CH	Frequency (MHz)	Peak Output Power (dBm)	Output Power (mW)	Antenna Gain (dBi)	Antenna Gain (Linear)	MPE
11b	CH1	2412	27.38	547.02	9	7.94	0.8649
	CH6	2437	27.52	564.94	9	7.94	0.8932
	CH11	2462	27.34	542.00	9	7.94	0.8569
11g	CH1	2412	27.98	628.06	9	7.94	0.9930
	CH6	2437	27.71	590.20	9	7.94	0.9331
	CH11	2462	27.85	609.54	9	7.94	0.9637
11n HT20	CH1	2412	25.67	368.98	9	7.94	0.5834
	CH6	2437	27.62	578.10	9	7.94	0.9140
	CH11	2462	25.55	358.92	9	7.94	0.5675

40MHz

Test Mode	CH	Frequency (MHz)	Peak Output Power (dBm)	Output Power (mW)	Antenna Gain (dBi)	Antenna Gain (Linear)	MPE
11n HT40	CH1	2422	22.54	179.47	9	7.94	0.2838
	CH4	2437	25.06	320.63	9	7.94	0.5069
	CH7	2452	21.44	139.32	9	7.94	0.2203

8. ANTENNA REQUIREMENT

8.1. STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

8.2. ANTENNA CONNECTED CONSTRUCTION

The antennas used for this product are Horizontal & Vertical antenna that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 9dBi.

9. DEVIATION TO TEST SPECIFICATIONS

[NONE]