



料号:

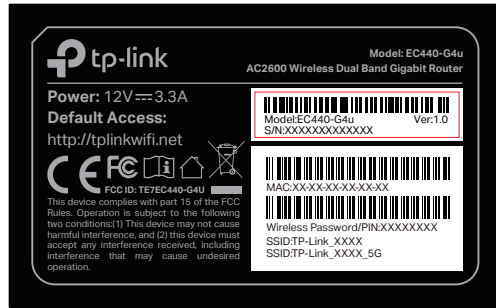

尺寸: 59*34 ± 0.2mm, 3-R1, 1-C2

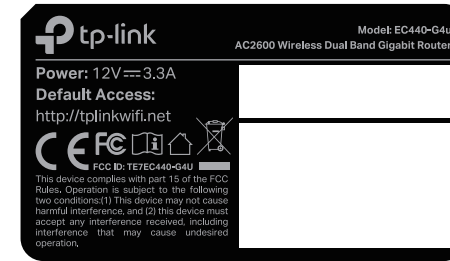

供应商来料效果图 (文件转曲)




备注:

- SN由工厂打印于27*6mm (7210500077) 的空白标贴后, 粘贴于产品规格标贴上。
MAC、Wireless Password/PIN、SSID均由工厂直接打印于锡标上;
码制均为Code 128; 字体均为Aktiv Grotesk Regular 5pt; 条码高度均为3mm。
SN: 编码规则同我司, 7位MO+6位流水号
MAC: 地址条码由“XXXXXXXXXXXX”生成, 文本打印为“XX-XX-XX-XX-XX-XX”
Wireless Password/PIN: 具体以软件生成为准
SSID:XXXX为MAC地址后四位(大写), 具体以软件生成为准

2) 图示条码均为示意, 具体请以生产实际为准。



普联技术有限公司 TP-LINK TECHNOLOGIES CO., LTD.			
名称	EC440-G4u(EU00)_1.0_产品规格标贴	Logo	PANTONE 877C
版本	A3	颜色	底色 黑色、白色
材质	80#加强胶珠光合成纸+雾膜	文字	PANTONE 877C
模具	风帆-280	其它	PANTONE 877C
机型版本号	EC440-G4u(EU00)_1.0	审核	结构工程师
设计	张育思	核	硬件工程师
完成日期	2019-06-12		产品工程师
记录	与上一版的区别		平面负责人

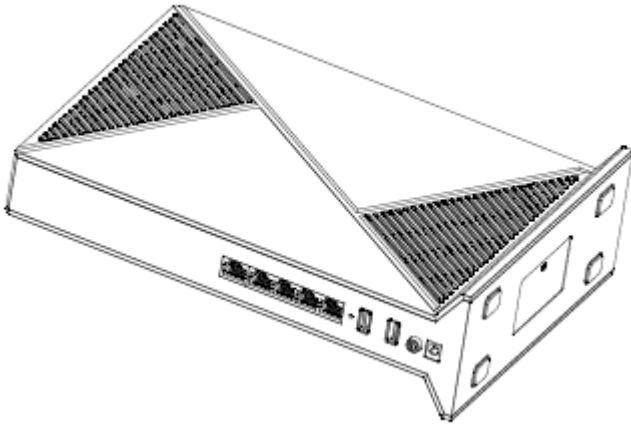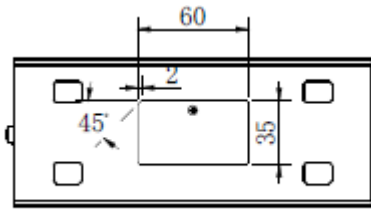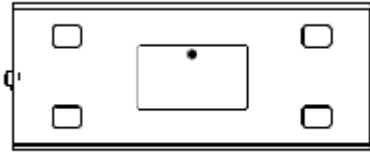

tp-link
Model: E0416-G4u
AC1200 Wireless Dual Band Gigabit Router

Power: 12V = 3.3A

Default Access:
<http://tplinkwifi.net>

CE FCC ID: T78C0434

MAC: 34:83:94:46:A7:7C
Wireless Password: 24Q_A77C
SSID: TP-Link_501_A77C

US00

This device complies with part 15 of the FCC conditions (1) This device may not cause harmful interference, and (2) it must accept any interference that may cause undesired operation.