


EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE20 at channel 5220MHz(Beamforming Mode)	Test Voltage	120V/60Hz

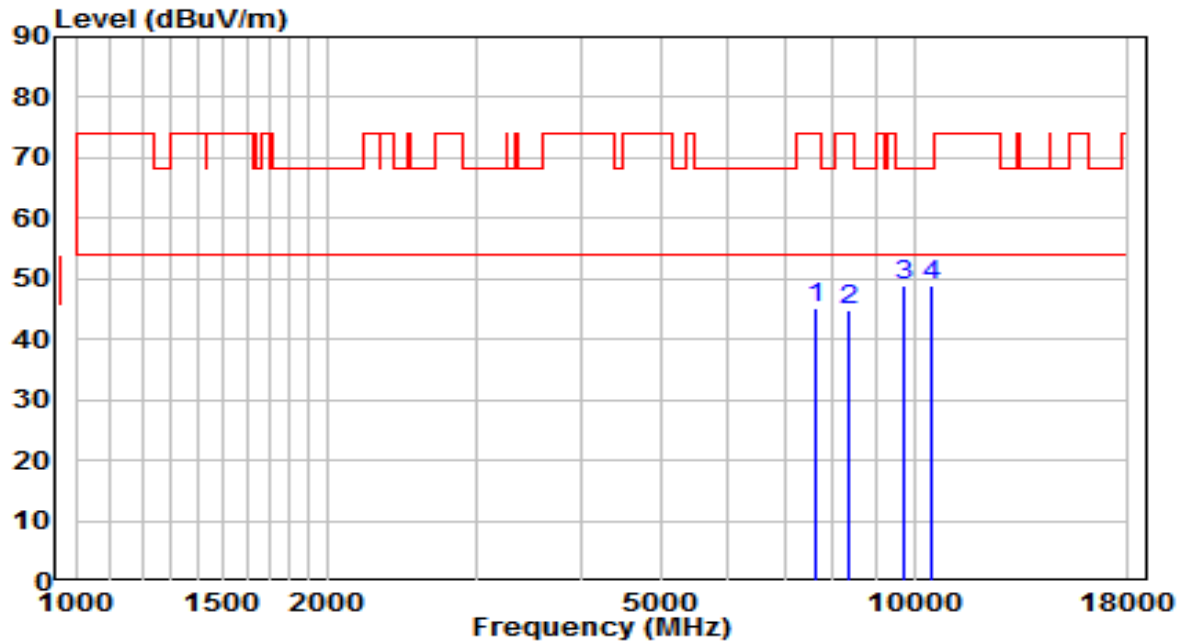


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7613.000	33.30	11.83	45.13	-28.87	74.00	Peak
2	8378.000	32.57	12.40	44.97	-29.03	74.00	Peak
3	* 9738.000	34.52	14.40	48.92	-19.28	68.20	Peak
4	10452.000	32.03	16.72	48.75	-19.45	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE20 at channel 5240MHz(Beamforming Mode)	Test Voltage	120V/60Hz

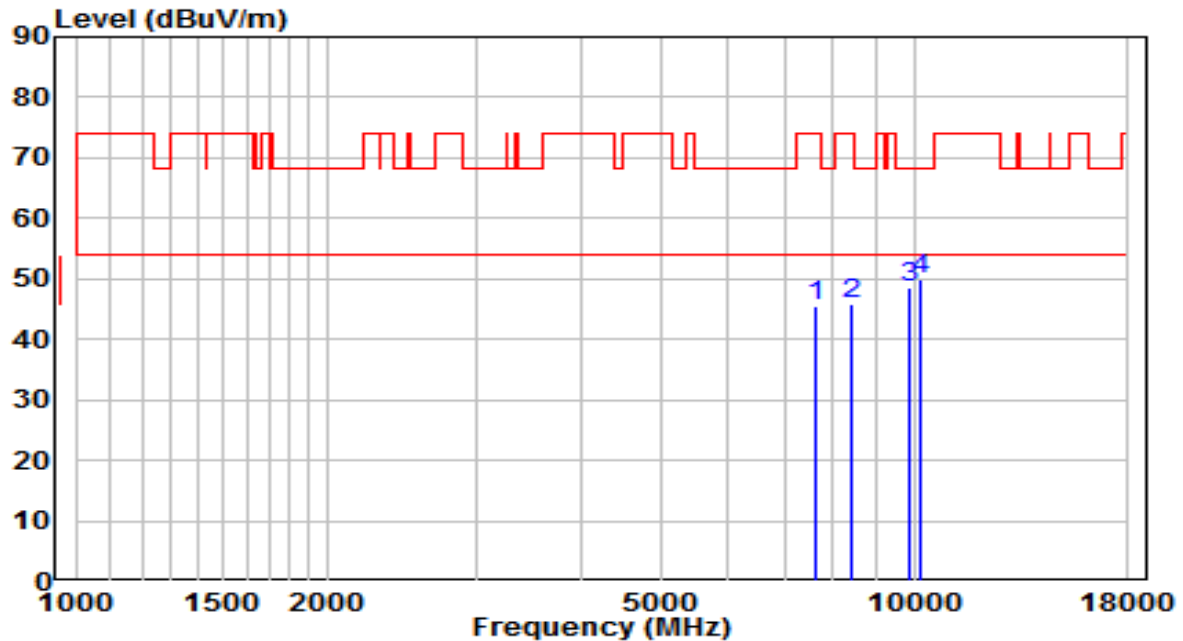


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7613.000	33.64	11.83	45.47	-28.53	74.00	Peak
2	8429.000	33.58	12.42	46.00	-28.00	74.00	Peak
3	9848.500	33.95	14.76	48.71	-19.49	68.20	Peak
4	* 10163.000	34.07	15.78	49.85	-18.35	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE20 at channel 5240MHz(Beamforming Mode)	Test Voltage	120V/60Hz

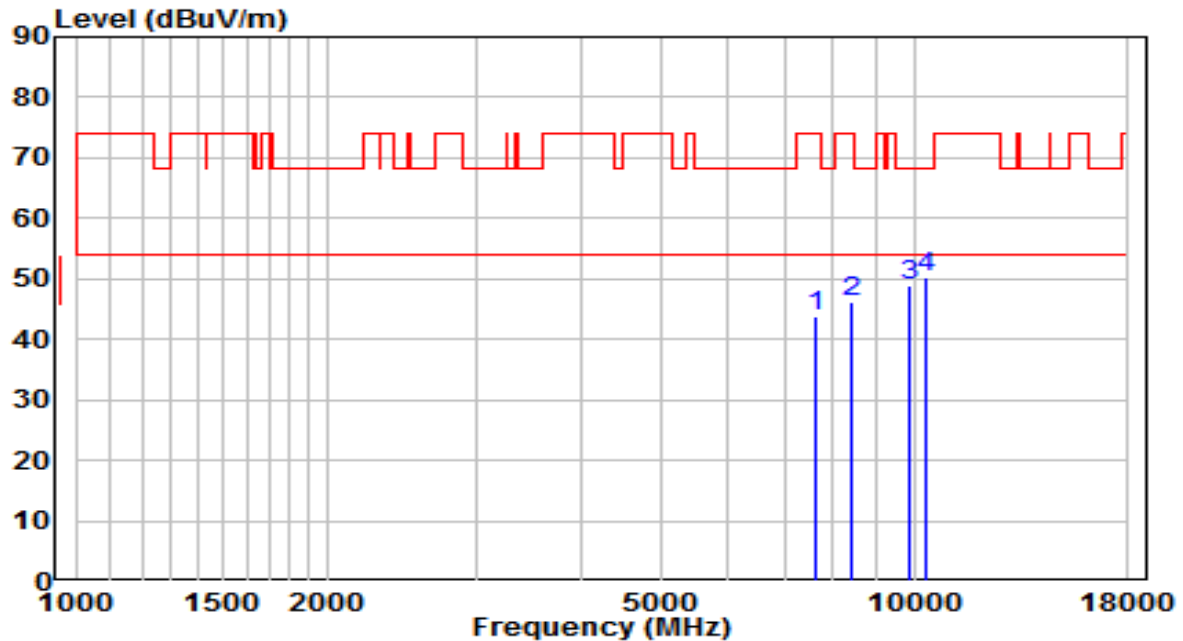


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7630.000	31.99	11.85	43.84	-30.16	74.00	Peak
2	8429.000	33.64	12.42	46.06	-27.94	74.00	Peak
3	9848.500	34.00	14.76	48.76	-19.44	68.20	Peak
4	* 10367.000	33.66	16.44	50.10	-18.10	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE20 at channel 5500MHz(Beamforming Mode)	Test Voltage	120V/60Hz

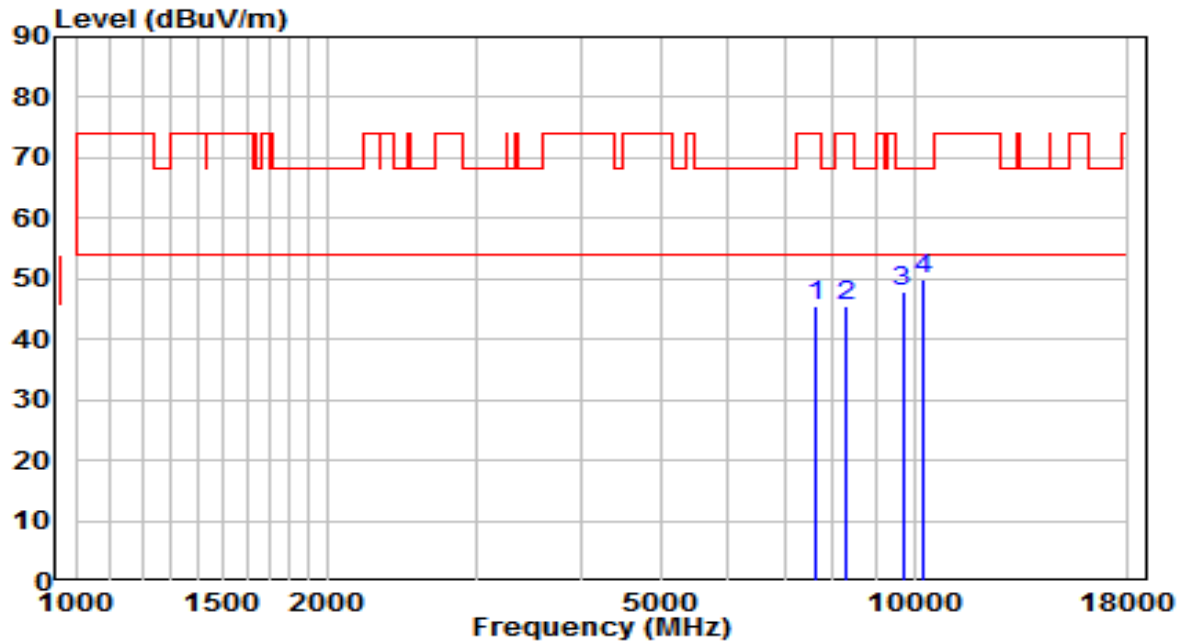


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7630.000	33.51	11.85	45.36	-28.64	74.00	Peak
2	8310.000	33.20	12.37	45.57	-28.43	74.00	Peak
3	9687.000	33.68	14.23	47.91	-20.29	68.20	Peak
4	* 10248.000	33.70	16.06	49.76	-18.44	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE20 at channel 5500MHz(Beamforming Mode)	Test Voltage	120V/60Hz

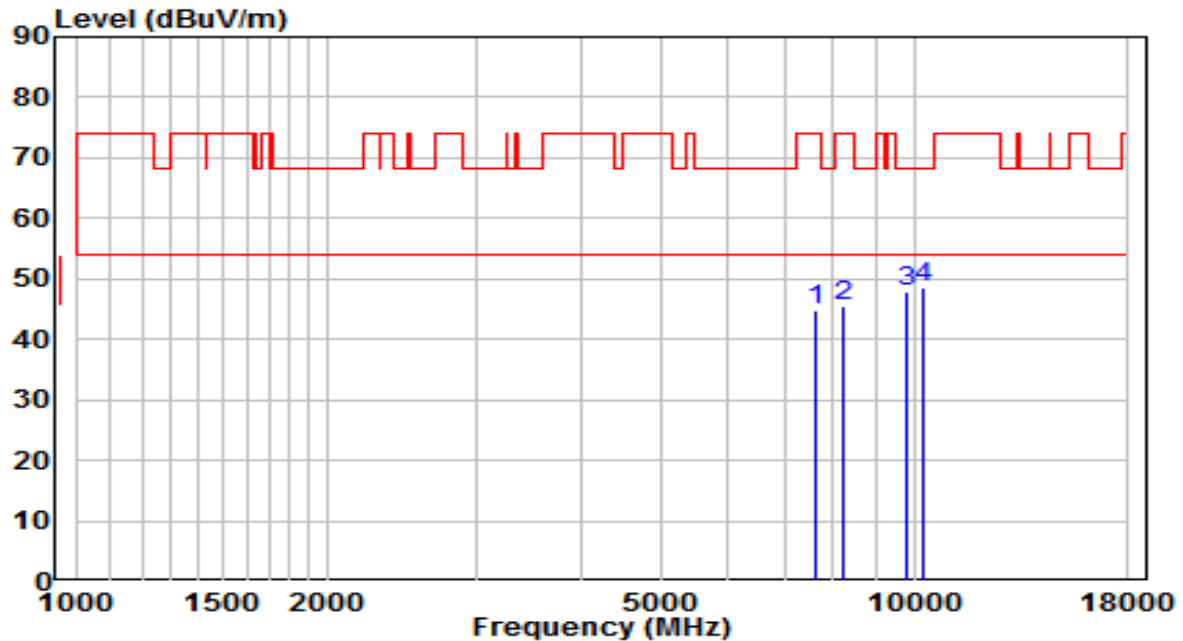


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7630.000	33.04	11.85	44.89	-29.11	74.00	Peak
2	8242.000	33.21	12.34	45.55	-28.45	74.00	Peak
3	9763.500	33.32	14.48	47.80	-20.40	68.20	Peak
4	* 10248.000	32.37	16.06	48.43	-19.77	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE20 at channel 5580MHz(Beamforming Mode)	Test Voltage	120V/60Hz

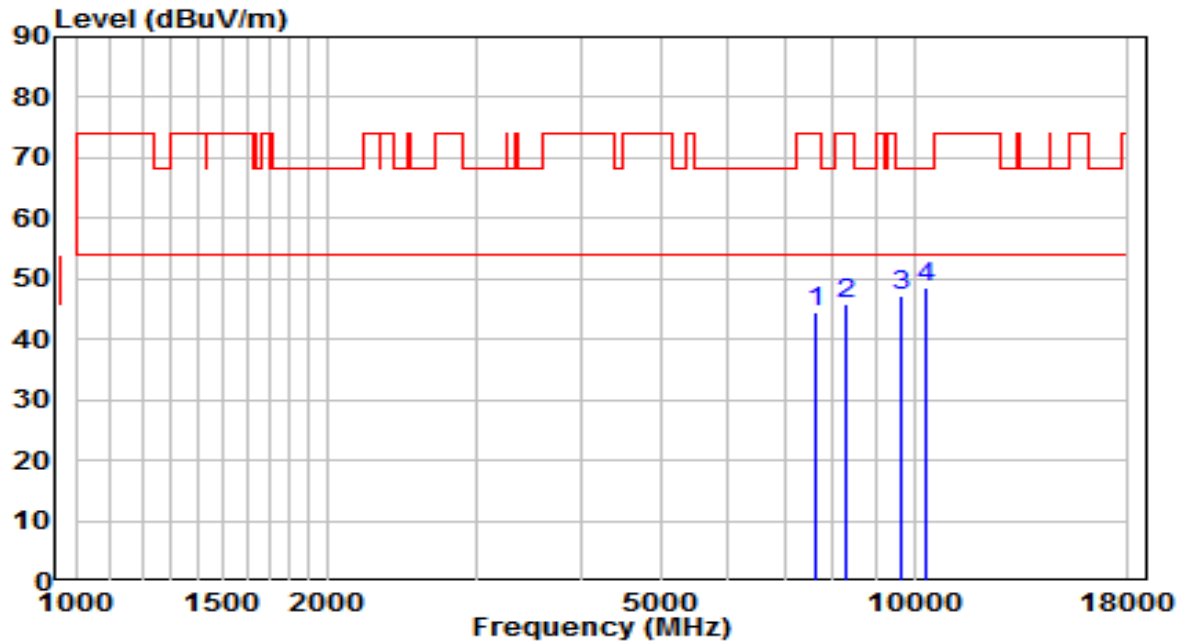


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7630.000	32.48	11.85	44.33	-29.67	74.00	Peak
2	8284.500	33.54	12.36	45.90	-28.10	74.00	Peak
3	9653.000	33.20	14.12	47.32	-20.88	68.20	Peak
4	* 10307.500	32.17	16.25	48.43	-19.77	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE20 at channel 5580MHz(Beamforming Mode)	Test Voltage	120V/60Hz

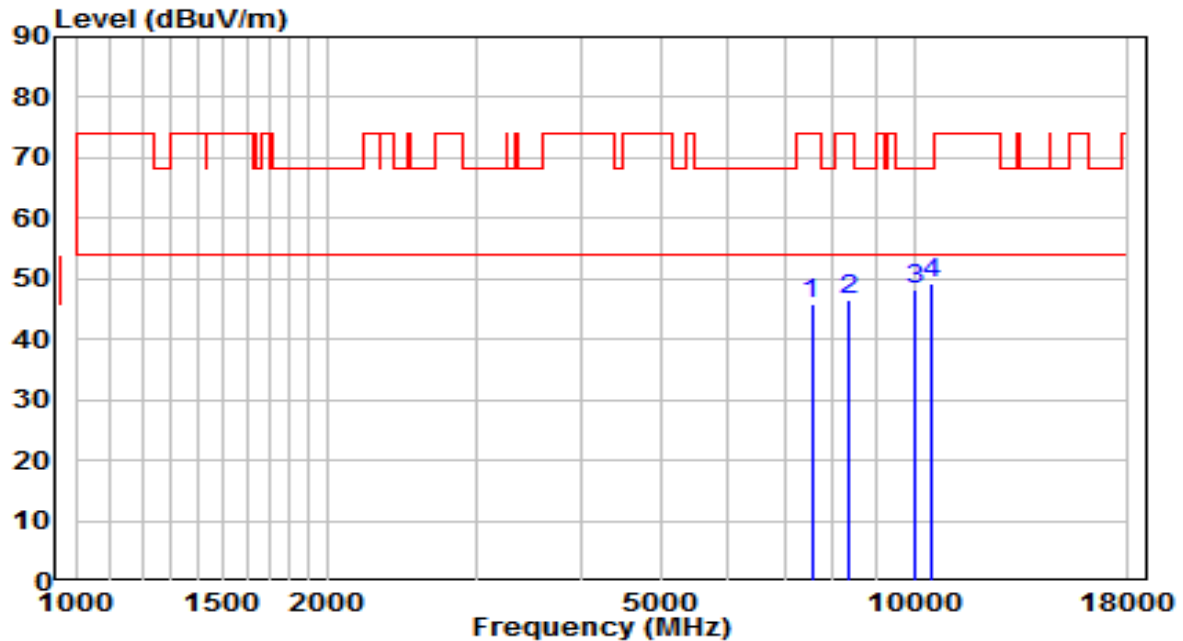


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7545.000	34.11	11.76	45.87	-28.13	74.00	Peak
2	8352.500	34.05	12.39	46.44	-27.56	74.00	Peak
3	9993.000	32.97	15.24	48.20	-20.00	68.20	Peak
4	* 10511.500	32.33	16.89	49.21	-18.99	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE20 at channel 5700MHz(Beamforming Mode)	Test Voltage	120V/60Hz

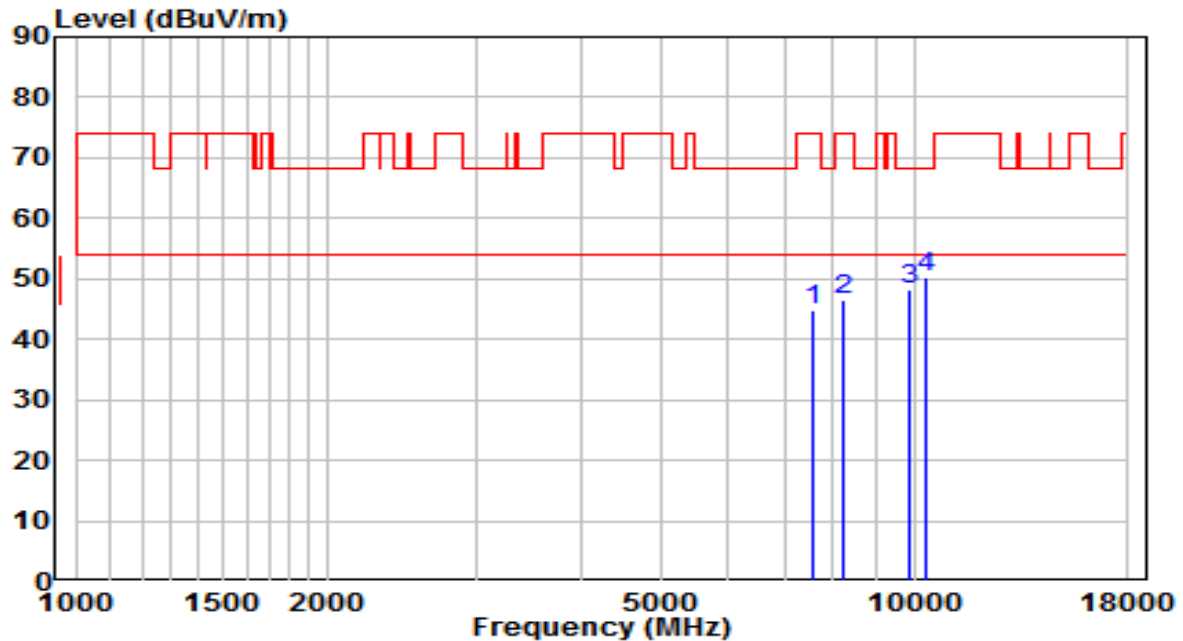


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7562.000	33.05	11.78	44.83	-29.17	74.00	Peak
2	8216.500	34.19	12.33	46.52	-27.48	74.00	Peak
3	9874.000	33.31	14.85	48.15	-20.05	68.20	Peak
4	* 10367.000	33.80	16.44	50.24	-17.96	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE20 at channel 5700MHz(Beamforming Mode)	Test Voltage	120V/60Hz

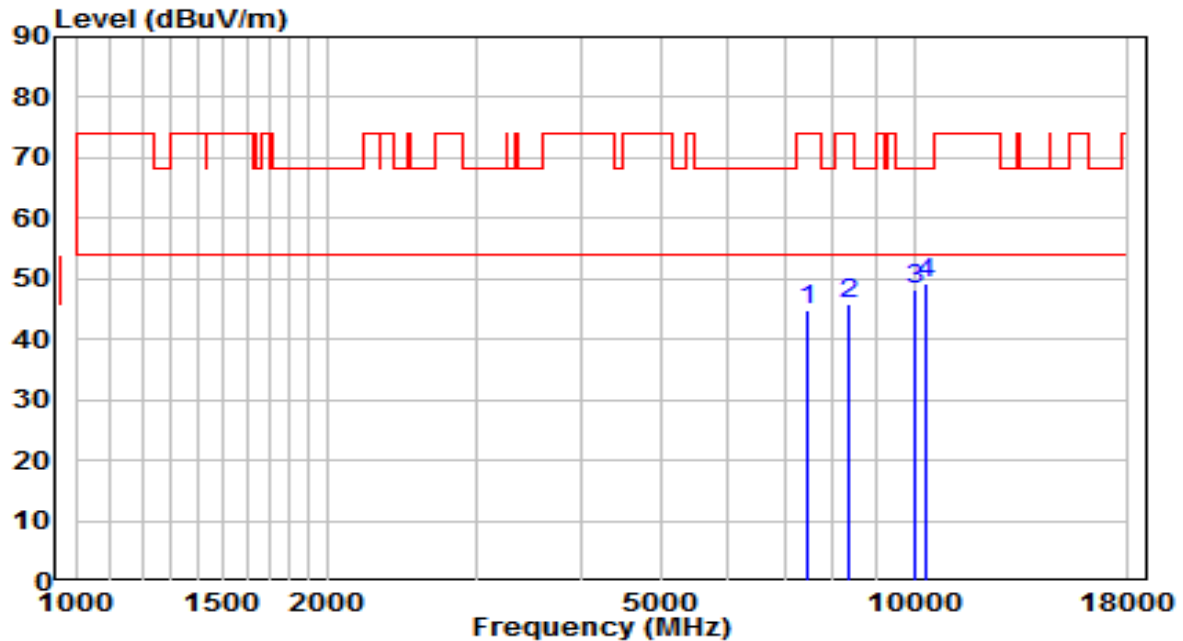


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7460.000	33.35	11.63	44.98	-29.02	74.00	Peak
2	8335.500	33.34	12.38	45.72	-28.28	74.00	Peak
3	9993.000	32.87	15.24	48.11	-20.09	68.20	Peak
4	* 10367.000	32.80	16.44	49.24	-18.96	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE20 at channel 5720MHz(Beamforming Mode)	Test Voltage	120V/60Hz

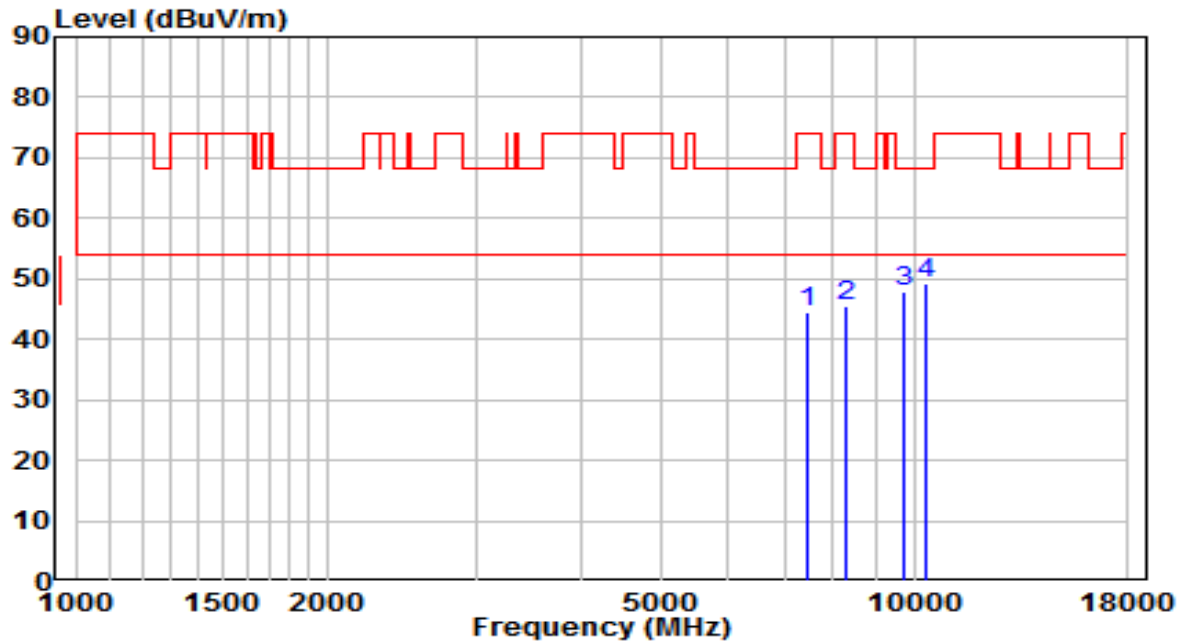


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7460.000	32.72	11.63	44.35	-29.65	74.00	Peak
2	8284.500	33.05	12.36	45.41	-28.59	74.00	Peak
3	9738.000	33.57	14.40	47.97	-20.23	68.20	Peak
4	* 10307.500	33.16	16.25	49.41	-18.79	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE20 at channel 5720MHz(Beamforming Mode)	Test Voltage	120V/60Hz

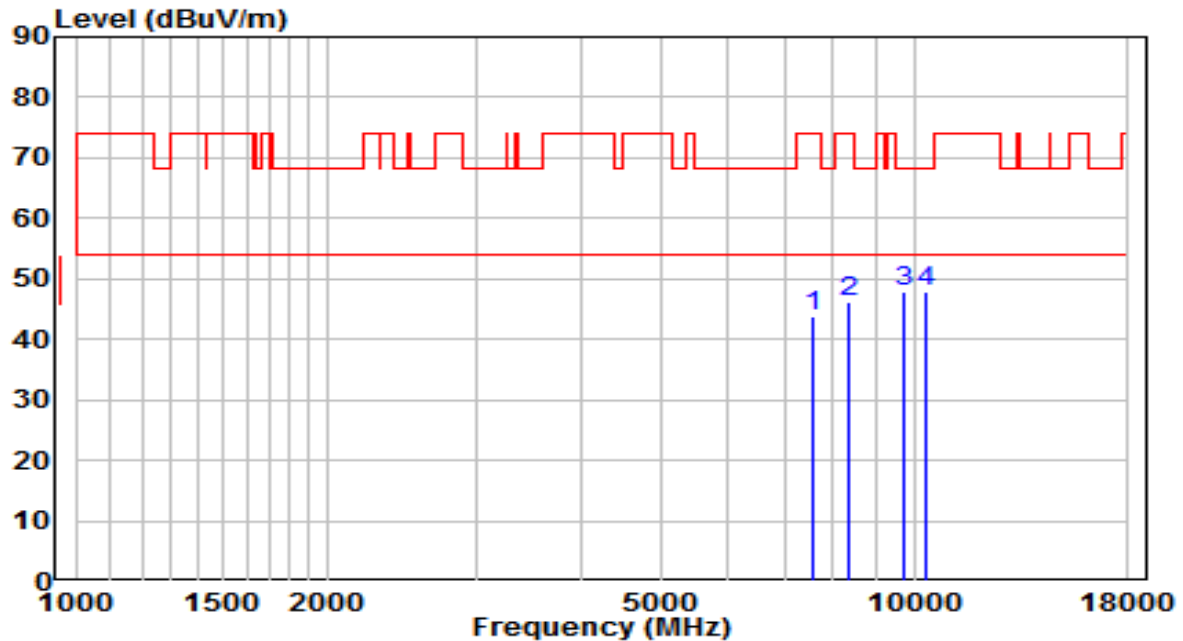


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7587.500	32.00	11.81	43.81	-30.19	74.00	Peak
2	8378.000	33.71	12.40	46.11	-27.89	74.00	Peak
3	9738.000	33.43	14.40	47.83	-20.37	68.20	Peak
4	* 10307.500	31.78	16.25	48.03	-20.17	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE20 at channel 5745MHz(Beamforming Mode)	Test Voltage	120V/60Hz

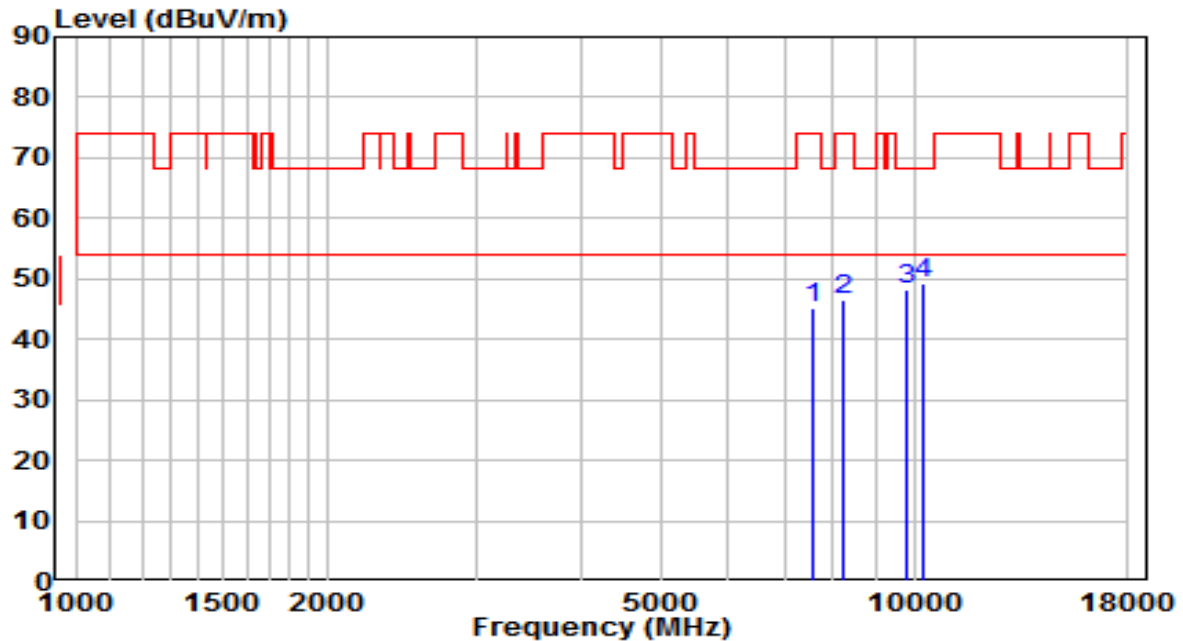


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7587.500	33.53	11.81	45.33	-28.67	74.00	Peak
2	8259.000	34.34	12.35	46.69	-27.31	74.00	Peak
3	9797.500	33.68	14.60	48.28	-19.92	68.20	Peak
4	* 10273.500	32.98	16.14	49.12	-19.08	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE20 at channel 5745MHz(Beamforming Mode)	Test Voltage	120V/60Hz

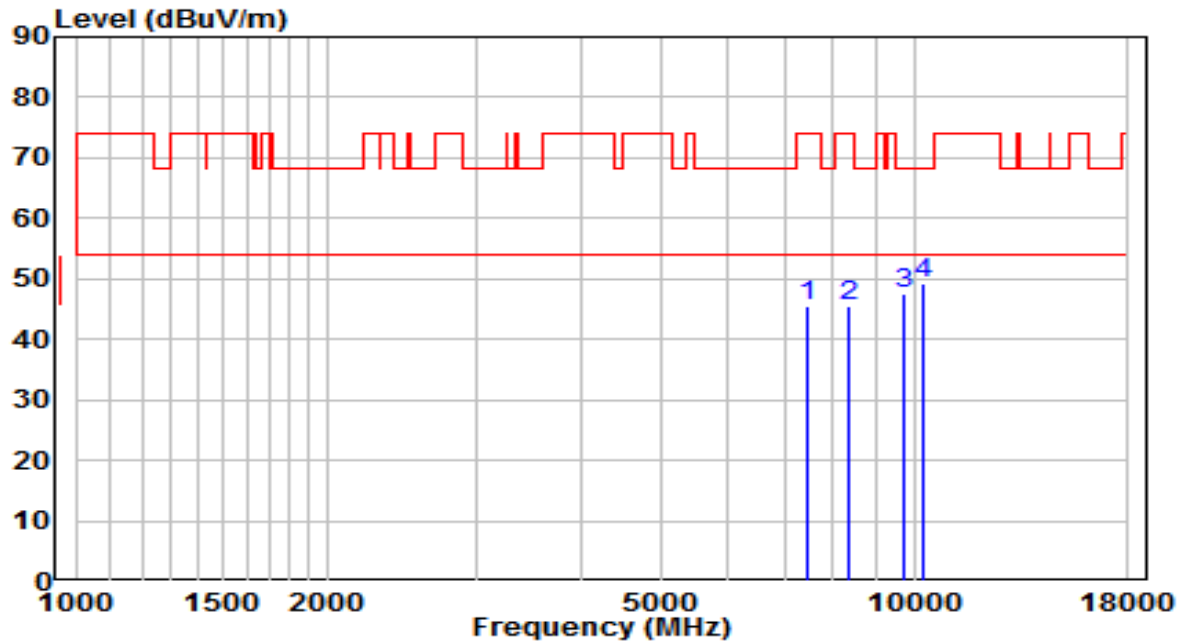


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7477.000	33.95	11.66	45.61	-28.39	74.00	Peak
2	8378.000	33.17	12.40	45.57	-28.43	74.00	Peak
3	9738.000	33.17	14.40	47.57	-20.63	68.20	Peak
4	* 10273.500	33.13	16.14	49.27	-18.93	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE20 at channel 5785MHz(Beamforming Mode)	Test Voltage	120V/60Hz

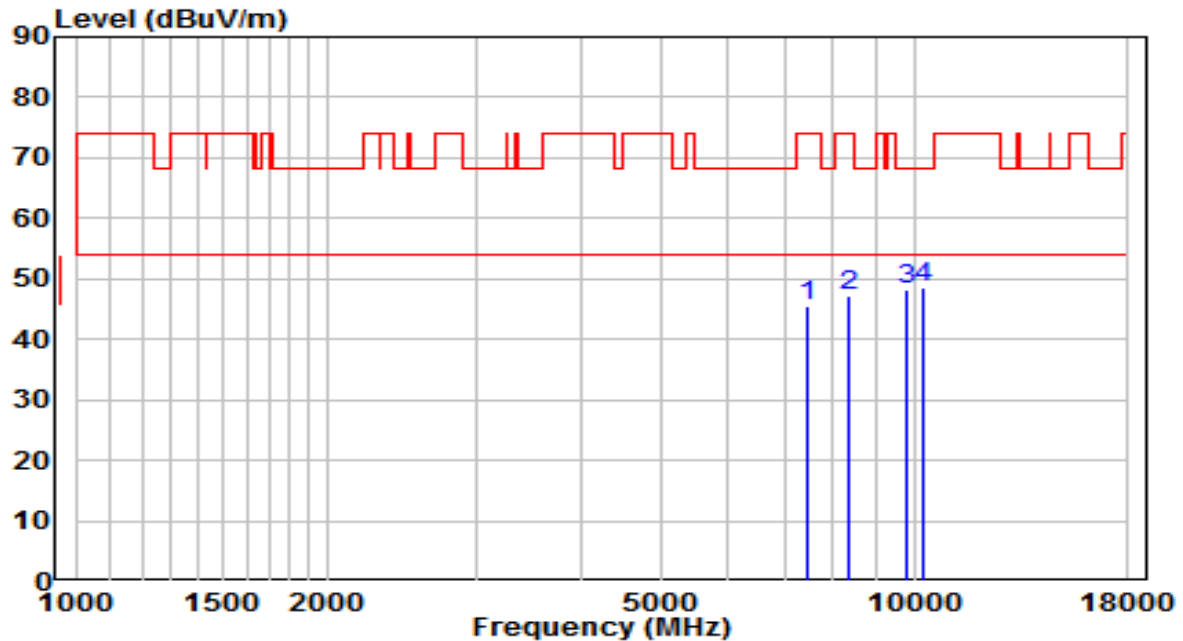


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7477.000	33.97	11.66	45.63	-28.37	74.00	Peak
2	8352.500	34.72	12.39	47.11	-26.89	74.00	Peak
3	9823.000	33.60	14.68	48.28	-19.92	68.20	Peak
4	* 10222.500	32.63	15.98	48.60	-19.60	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE20 at channel 5785MHz(Beamforming Mode)	Test Voltage	120V/60Hz

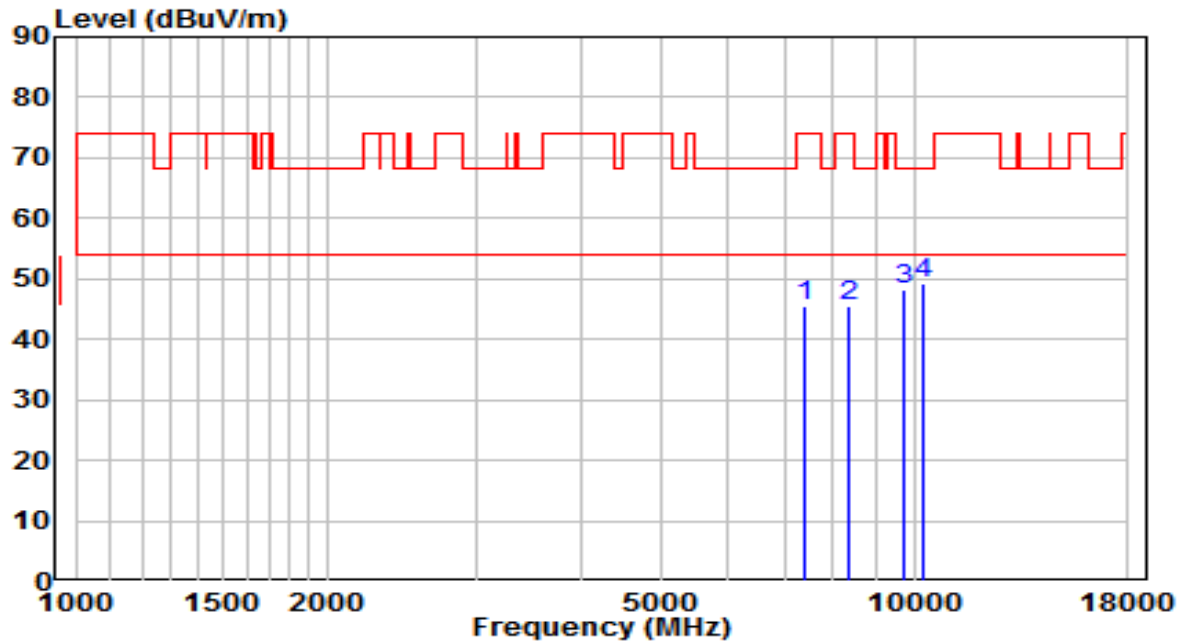


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7400.500	34.12	11.49	45.61	-28.39	74.00	Peak
2	8335.500	33.08	12.38	45.46	-28.54	74.00	Peak
3	9738.000	33.90	14.40	48.30	-19.90	68.20	Peak
4	* 10222.500	33.29	15.98	49.27	-18.93	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE20 at channel 5825MHz(Beamforming Mode)	Test Voltage	120V/60Hz

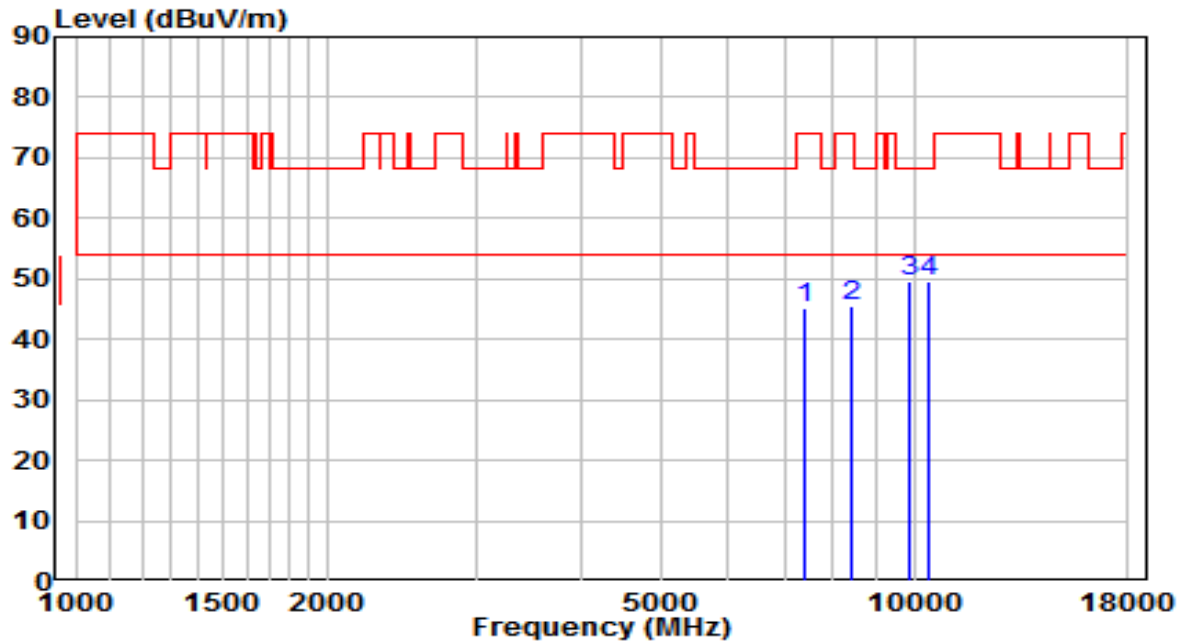


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7400.500	33.57	11.49	45.07	-28.93	74.00	Peak
2	8403.500	33.11	12.41	45.52	-28.48	74.00	Peak
3	9874.000	34.78	14.85	49.63	-18.57	68.20	Peak
4	* 10392.500	33.14	16.52	49.66	-18.54	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE20 at channel 5825MHz(Beamforming Mode)	Test Voltage	120V/60Hz

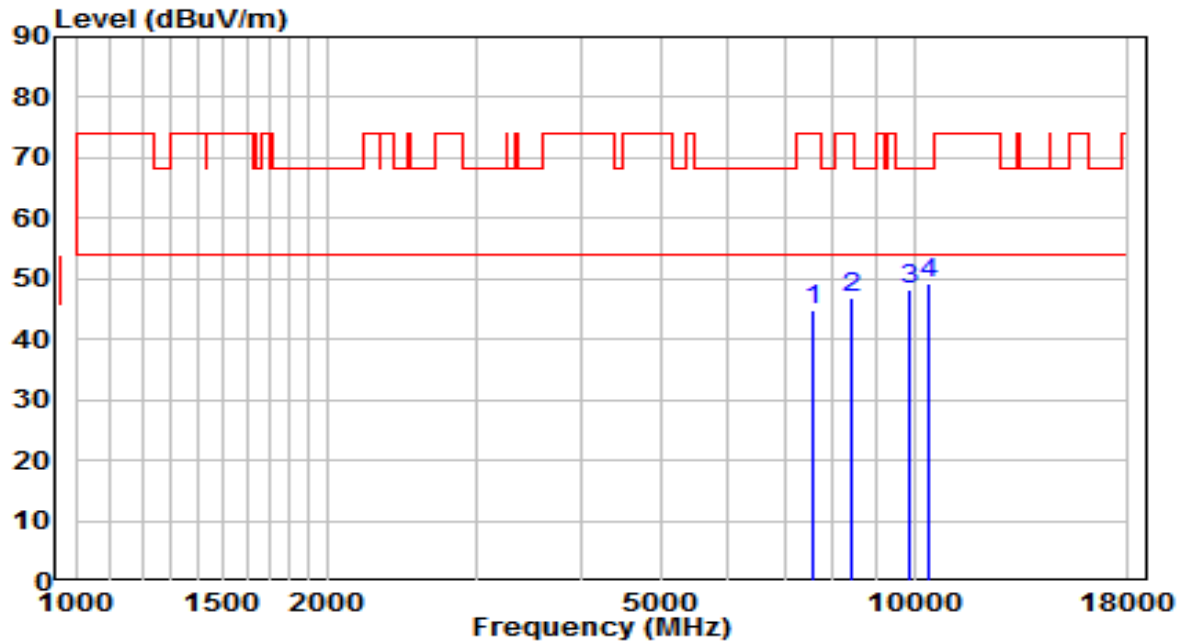


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7562.000	33.14	11.78	44.92	-29.08	74.00	Peak
2	8403.500	34.39	12.41	46.80	-27.20	74.00	Peak
3	9874.000	33.26	14.85	48.11	-20.09	68.20	Peak
4	* 10392.500	32.69	16.52	49.21	-18.99	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE40 at channel 5190MHz(Beamforming Mode)	Test Voltage	120V/60Hz

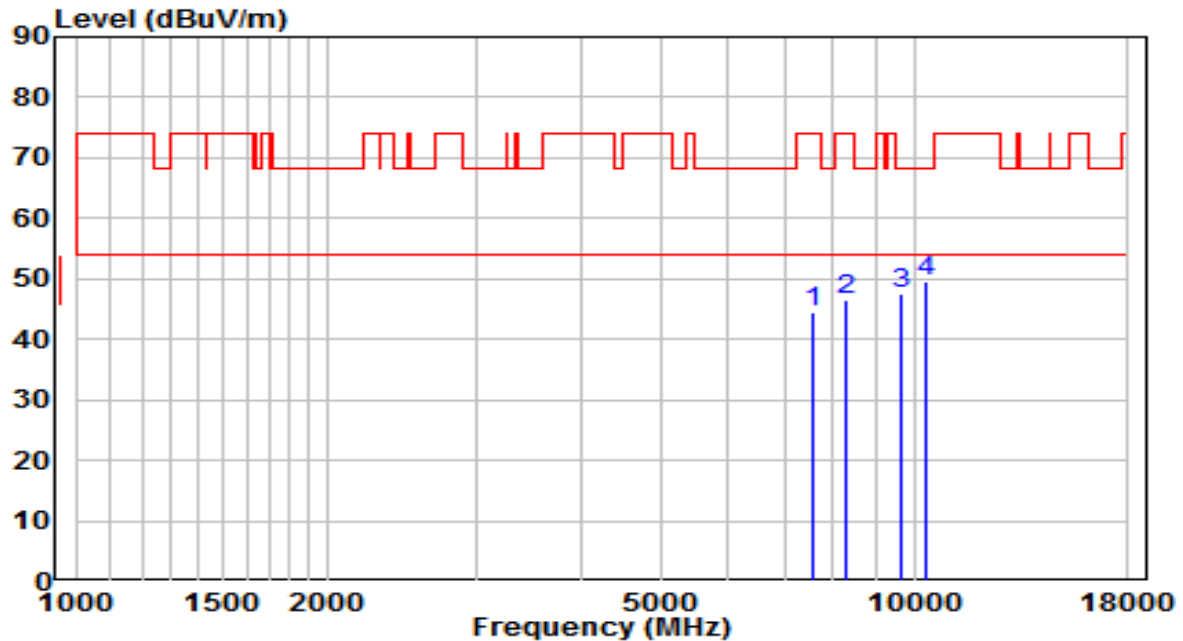


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7562.000	32.63	11.78	44.41	-29.59	74.00	Peak
2	8310.000	34.04	12.37	46.41	-27.59	74.00	Peak
3	9627.500	33.48	14.04	47.52	-20.68	68.20	Peak
4	* 10333.000	33.10	16.33	49.44	-18.76	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE40 at channel 5190MHz(Beamforming Mode)	Test Voltage	120V/60Hz

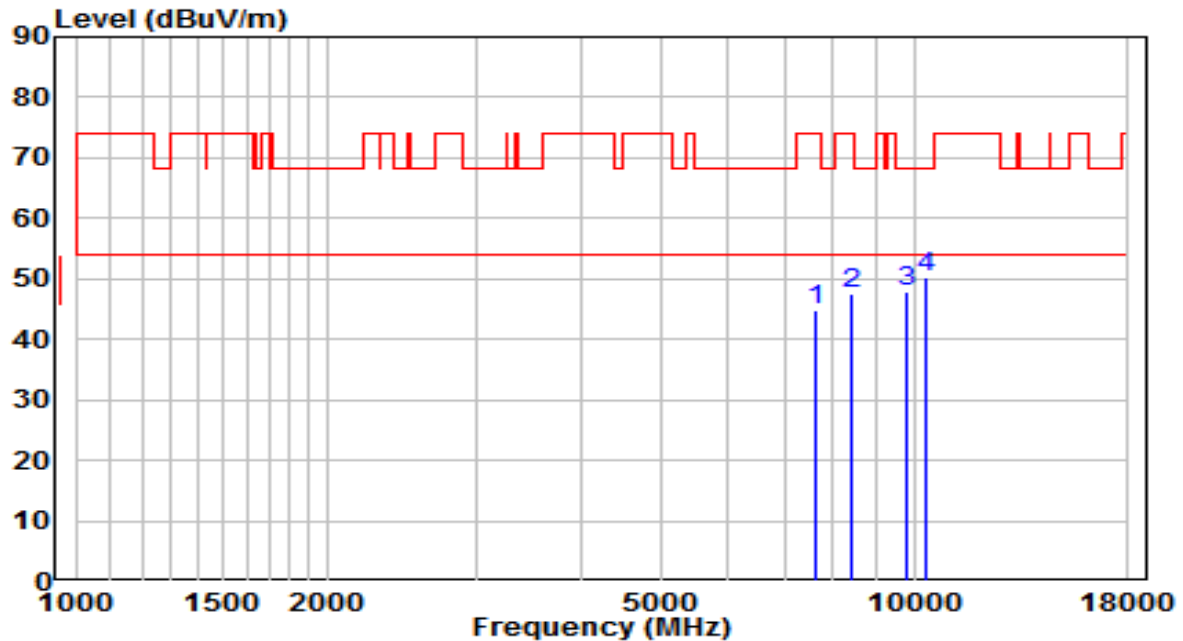


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7613.000	32.86	11.83	44.69	-29.31	74.00	Peak
2	8403.500	35.17	12.41	47.59	-26.41	74.00	Peak
3	9797.500	33.21	14.60	47.80	-20.40	68.20	Peak
4	* 10333.000	33.90	16.33	50.23	-17.97	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE40 at channel 5230MHz(Beamforming Mode)	Test Voltage	120V/60Hz

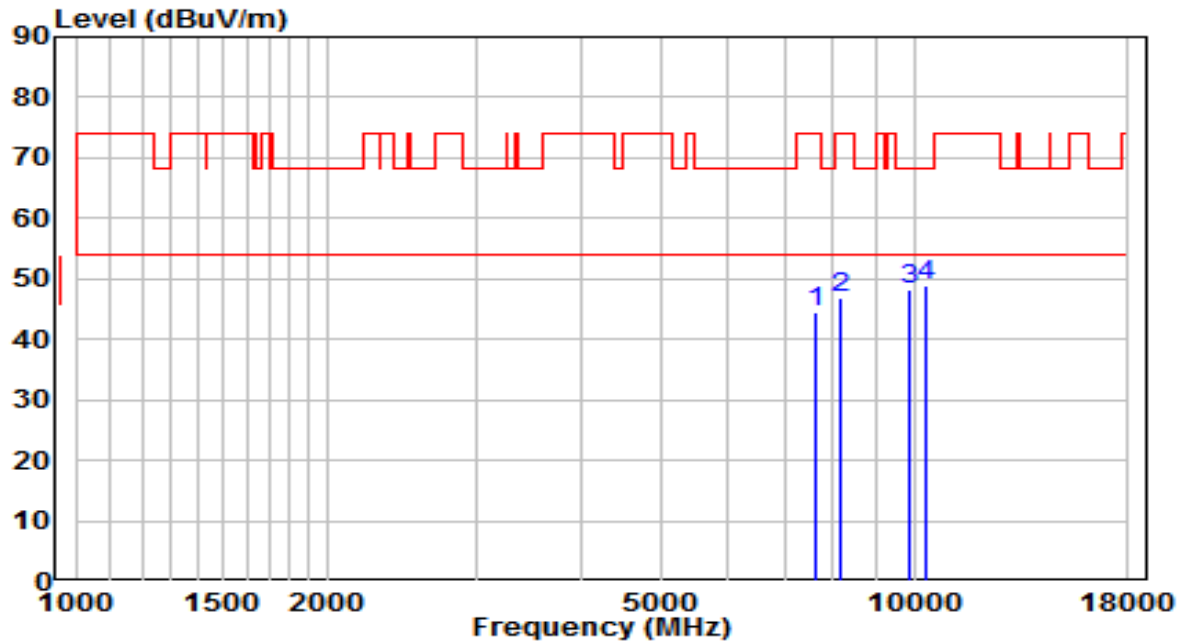


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7613.000	32.51	11.83	44.34	-29.66	74.00	Peak
2	8165.500	34.49	12.30	46.79	-27.21	74.00	Peak
3	9848.500	33.36	14.76	48.12	-20.08	68.20	Peak
4	* 10333.000	32.68	16.33	49.01	-19.19	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE40 at channel 5230MHz(Beamforming Mode)	Test Voltage	120V/60Hz

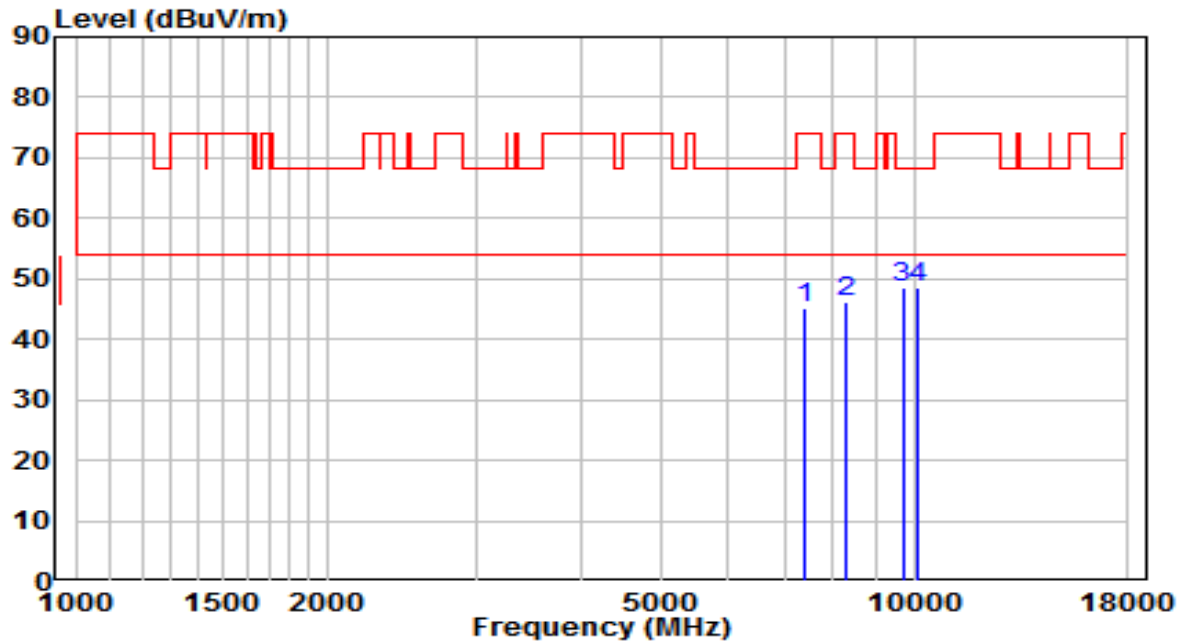


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7400.500	33.55	11.49	45.04	-28.96	74.00	Peak
2	8310.000	33.73	12.37	46.10	-27.90	74.00	Peak
3	9687.000	34.21	14.23	48.45	-19.75	68.20	Peak
4	* 10103.500	33.12	15.59	48.72	-19.48	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE40 at channel 5510MHz(Beamforming Mode)	Test Voltage	120V/60Hz

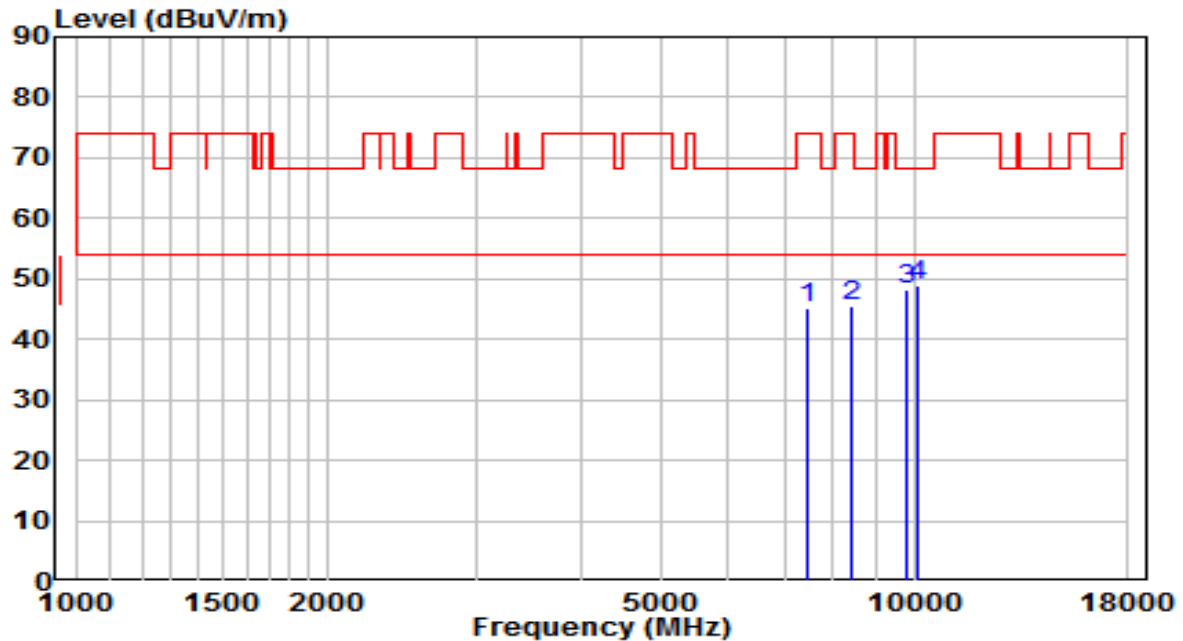


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7460.000	33.46	11.63	45.08	-28.92	74.00	Peak
2	8429.000	33.23	12.42	45.66	-28.34	74.00	Peak
3	9763.500	33.76	14.48	48.24	-19.96	68.20	Peak
4	* 10103.500	33.31	15.59	48.91	-19.29	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE40 at channel 5510MHz(Beamforming Mode)	Test Voltage	120V/60Hz

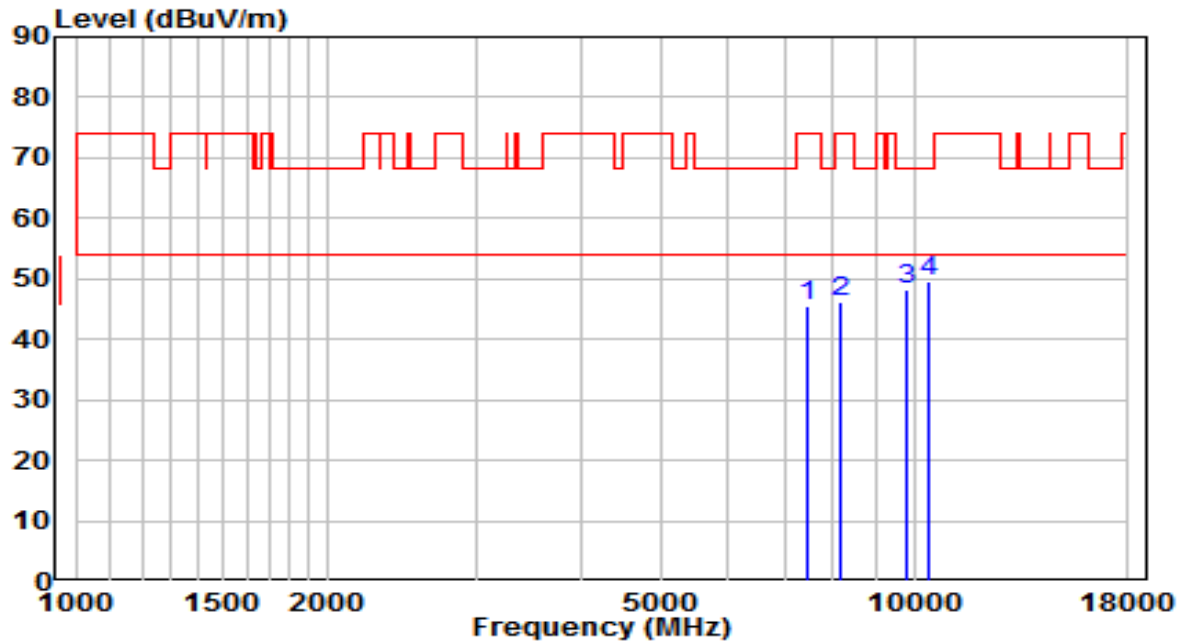


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7460.000	33.97	11.63	45.60	-28.40	74.00	Peak
2	8165.500	33.95	12.30	46.25	-27.75	74.00	Peak
3	9797.500	33.52	14.60	48.12	-20.08	68.20	Peak
4	* 10426.500	33.01	16.63	49.64	-18.56	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE40 at channel 5550MHz(Beamforming Mode)	Test Voltage	120V/60Hz

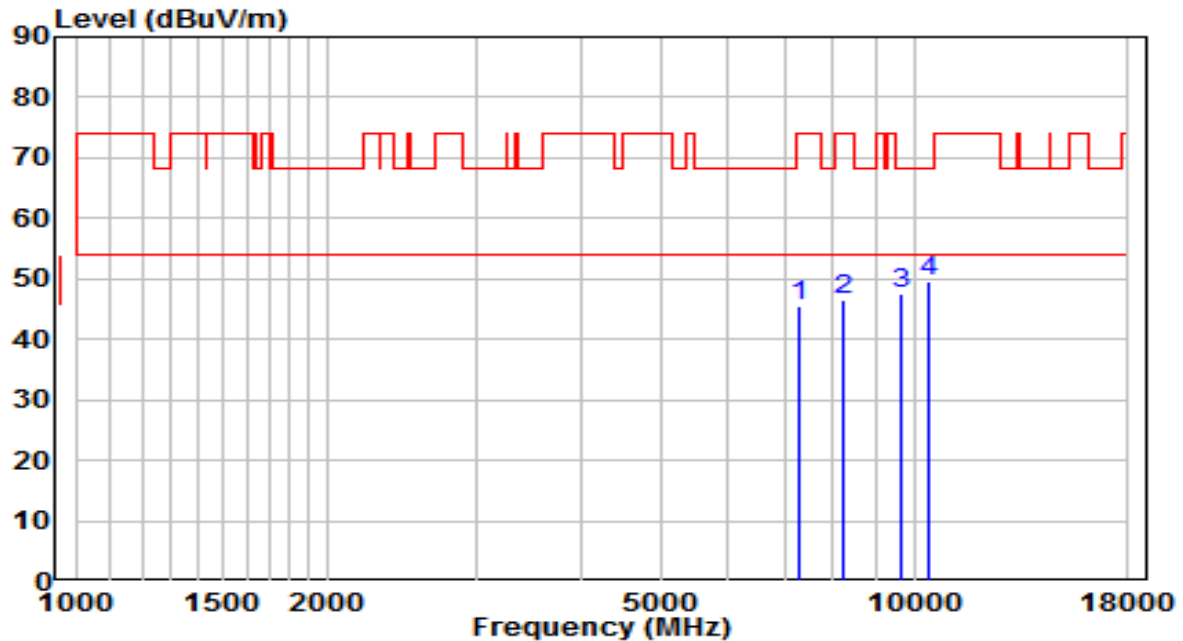


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7290.000	34.16	11.25	45.41	-28.59	74.00	Peak
2	8259.000	34.09	12.35	46.44	-27.56	74.00	Peak
3	9653.000	33.52	14.12	47.64	-20.56	68.20	Peak
4	* 10426.500	33.01	16.63	49.64	-18.56	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE40 at channel 5550MHz(Beamforming Mode)	Test Voltage	120V/60Hz

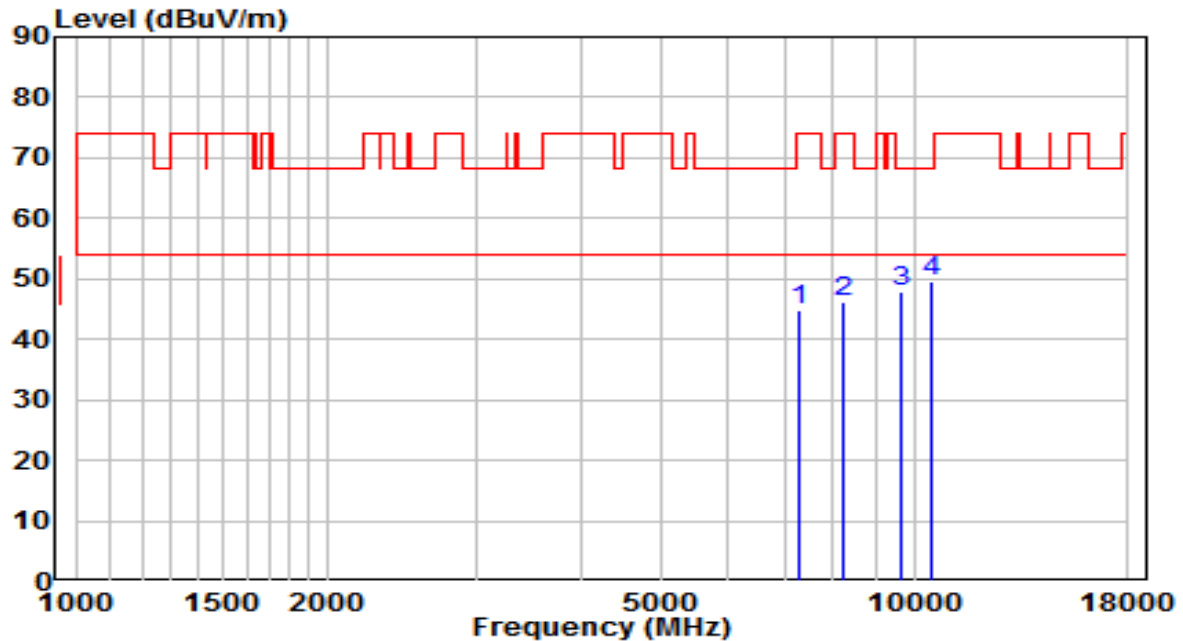


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7290.000	33.63	11.25	44.87	-29.13	74.00	Peak
2	8242.000	33.91	12.34	46.25	-27.75	74.00	Peak
3	9627.500	33.78	14.04	47.82	-20.38	68.20	Peak
4	* 10486.000	32.87	16.83	49.69	-18.51	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE40 at channel 5670MHz(Beamforming Mode)	Test Voltage	120V/60Hz

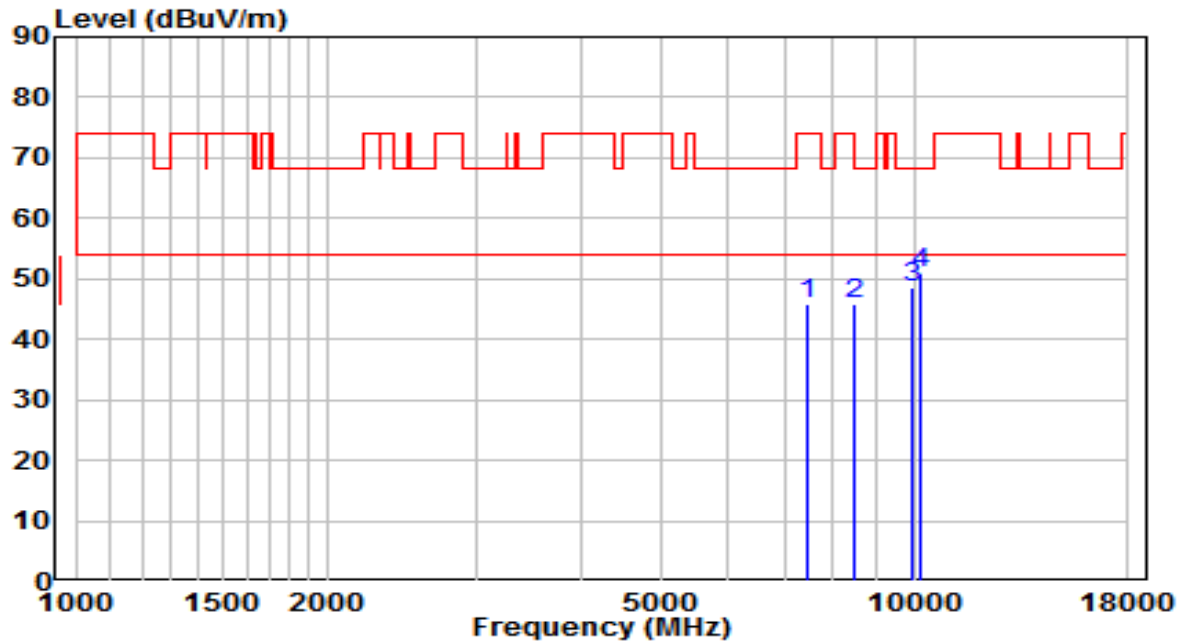


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7434.500	34.24	11.57	45.81	-28.19	74.00	Peak
2	8454.500	33.51	12.43	45.95	-28.05	74.00	Peak
3	9933.500	33.60	15.04	48.65	-19.55	68.20	Peak
4	* 10188.500	34.93	15.87	50.80	-17.40	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE40 at channel 5670MHz(Beamforming Mode)	Test Voltage	120V/60Hz

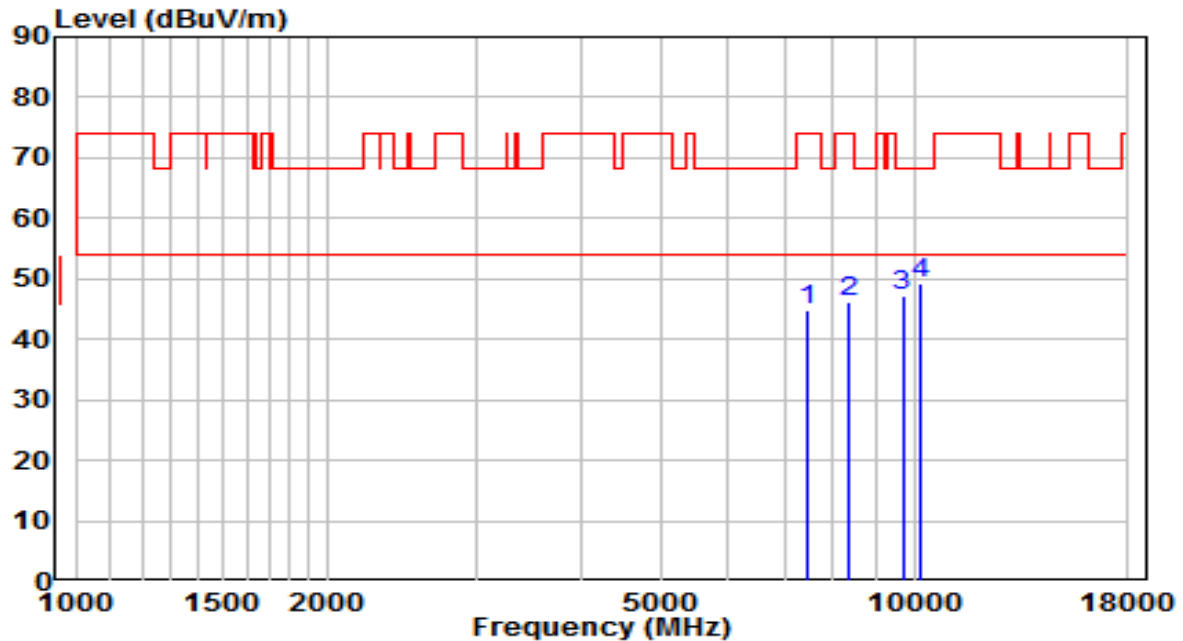


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7477.000	33.04	11.66	44.70	-29.30	74.00	Peak
2	8335.500	33.86	12.38	46.24	-27.76	74.00	Peak
3	9687.000	32.98	14.23	47.22	-20.98	68.20	Peak
4	* 10188.500	33.48	15.87	49.35	-18.85	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE40 at channel 5710MHz(Beamforming Mode)	Test Voltage	120V/60Hz

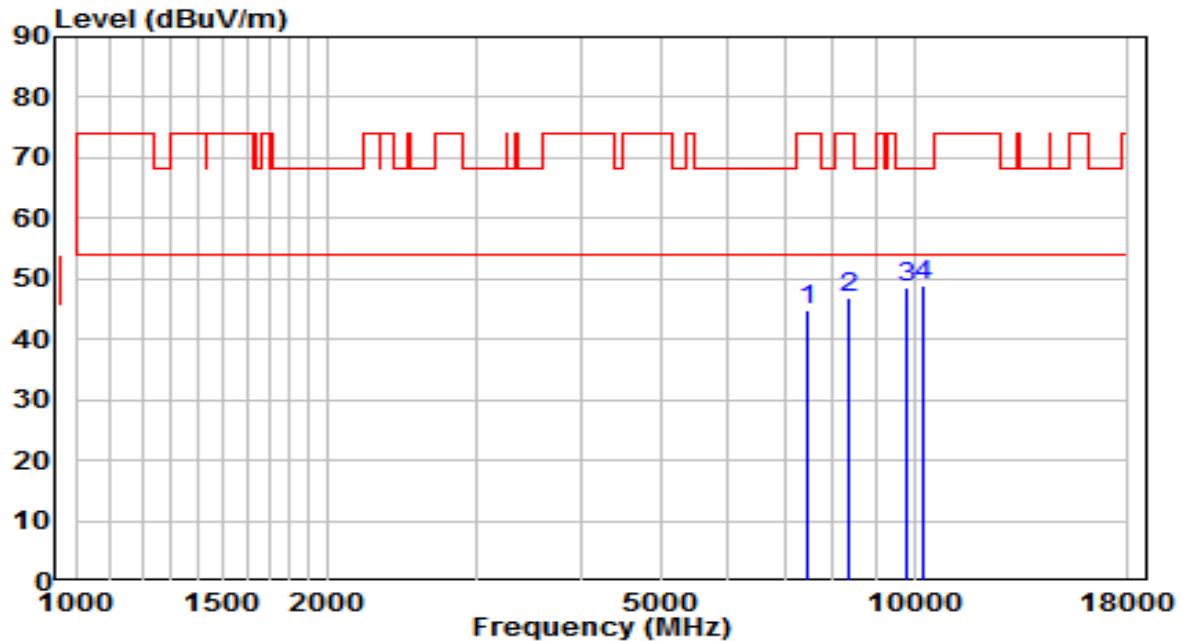


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7477.000	33.12	11.66	44.78	-29.22	74.00	Peak
2	8378.000	34.37	12.40	46.77	-27.23	74.00	Peak
3	9763.500	34.13	14.48	48.62	-19.58	68.20	Peak
4	* 10273.500	32.76	16.14	48.90	-19.30	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE40 at channel 5710MHz(Beamforming Mode)	Test Voltage	120V/60Hz

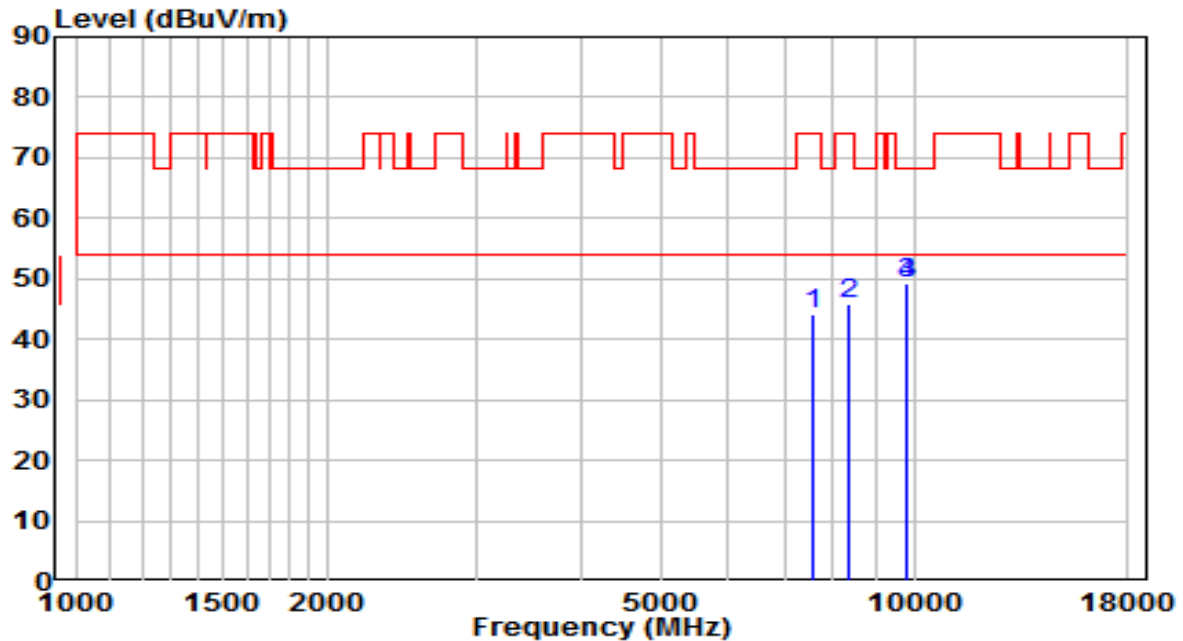


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7587.500	32.34	11.81	44.15	-29.85	74.00	Peak
2	8378.000	33.40	12.40	45.80	-28.20	74.00	Peak
3	* 9797.500	34.51	14.60	49.11	-19.09	68.20	Peak
4	9797.500	34.51	14.60	49.11	-19.09	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE40 at channel 5755MHz(Beamforming Mode)	Test Voltage	120V/60Hz

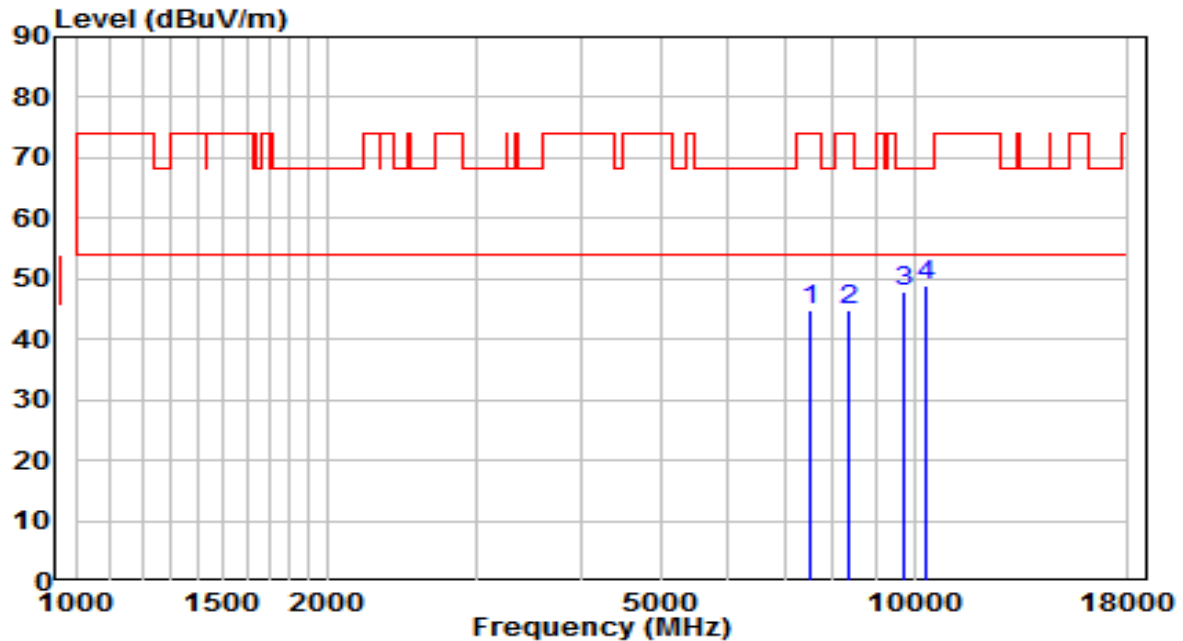


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7502.500	33.07	11.71	44.78	-29.22	74.00	Peak
2	8378.000	32.49	12.40	44.89	-29.11	74.00	Peak
3	9712.500	33.48	14.32	47.80	-20.40	68.20	Peak
4	* 10333.000	32.45	16.33	48.79	-19.41	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE40 at channel 5755MHz(Beamforming Mode)	Test Voltage	120V/60Hz

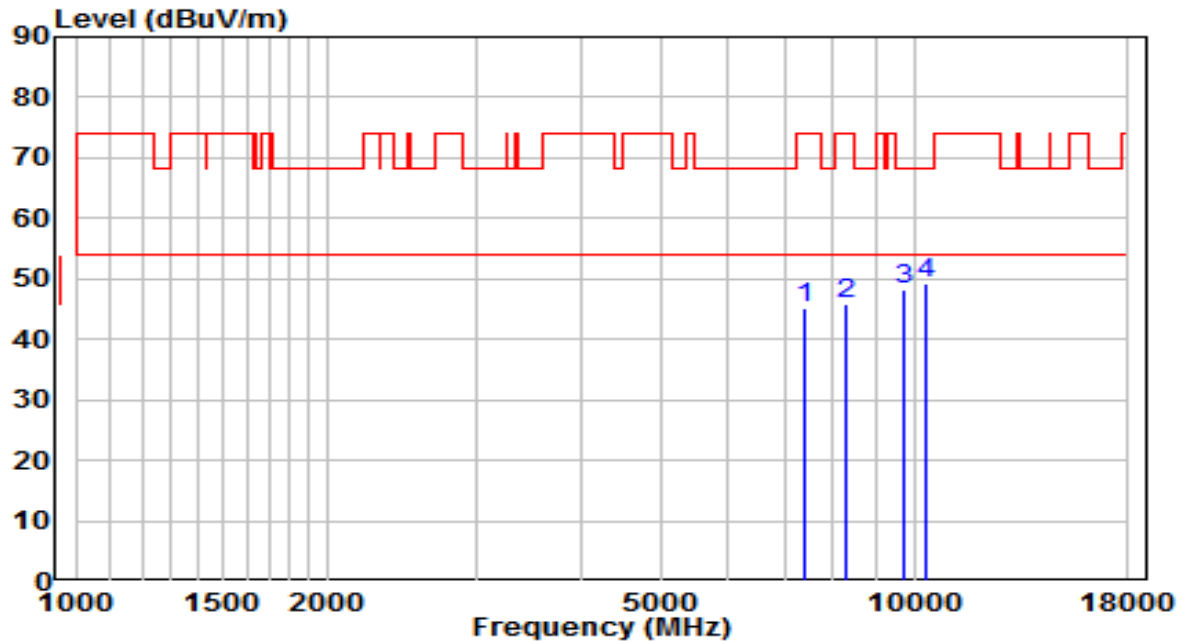


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7400.500	33.53	11.49	45.02	-28.98	74.00	Peak
2	8310.000	33.46	12.37	45.83	-28.17	74.00	Peak
3	9712.500	34.05	14.32	48.37	-19.83	68.20	Peak
4	* 10333.000	32.94	16.33	49.27	-18.93	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE40 at channel 5795MHz(Beamforming Mode)	Test Voltage	120V/60Hz

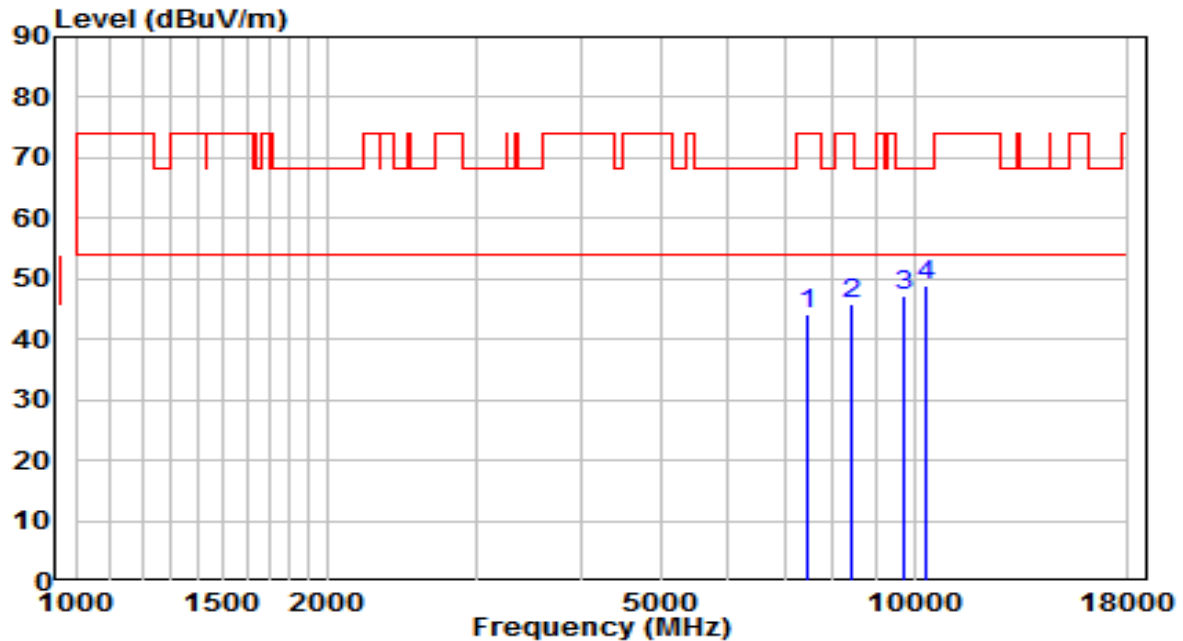


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7477.000	32.52	11.66	44.19	-29.81	74.00	Peak
2	8429.000	33.59	12.42	46.01	-27.99	74.00	Peak
3	9738.000	32.70	14.40	47.10	-21.10	68.20	Peak
4	* 10333.000	32.71	16.33	49.04	-19.16	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE40 at channel 5795MHz(Beamforming Mode)	Test Voltage	120V/60Hz

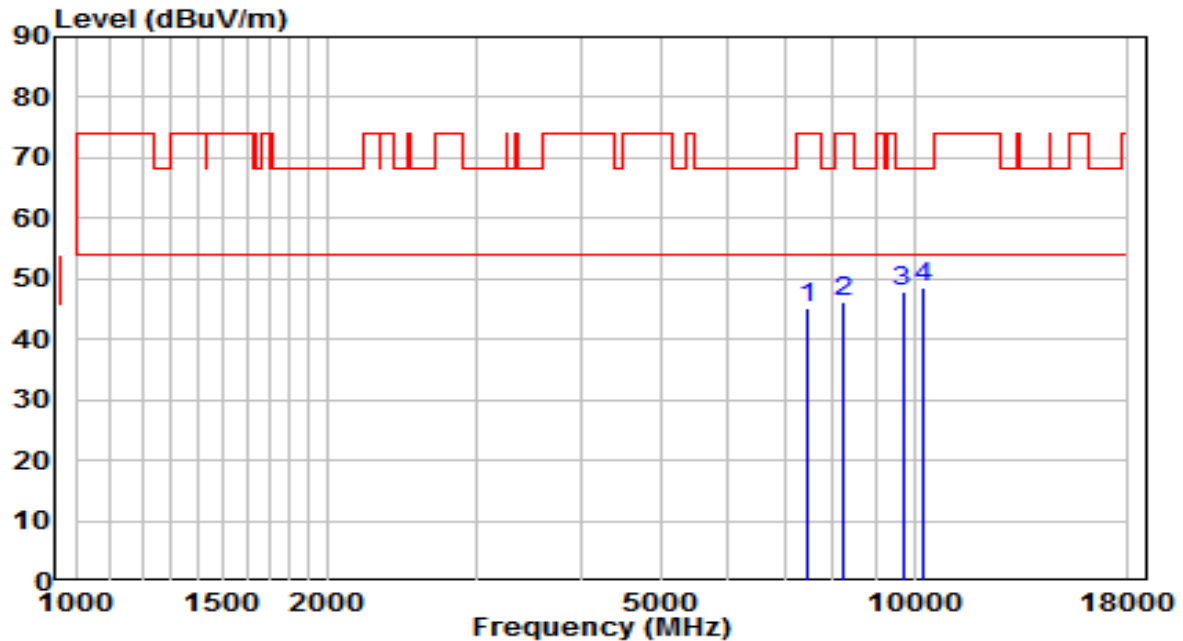


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7477.000	33.34	11.66	45.01	-28.99	74.00	Peak
2	8259.000	33.96	12.35	46.31	-27.69	74.00	Peak
3	9687.000	33.60	14.23	47.83	-20.37	68.20	Peak
4	* 10273.500	32.48	16.14	48.62	-19.58	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE80 at channel 5210MHz(Beamforming Mode)	Test Voltage	120V/60Hz

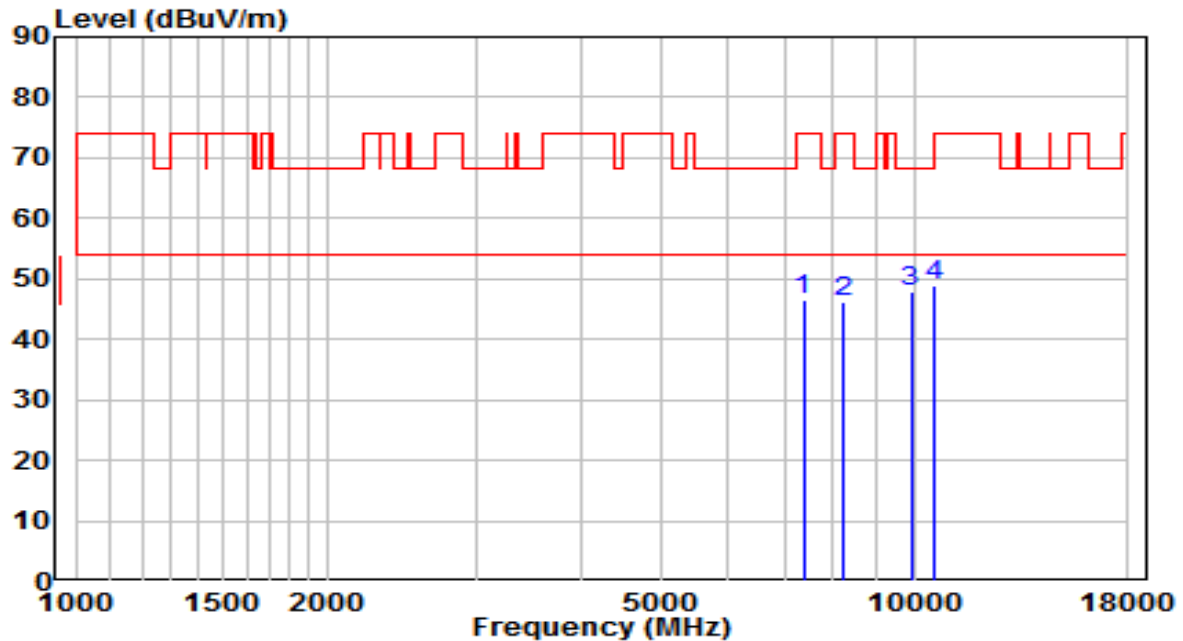


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7375.000	35.18	11.44	46.61	-27.39	74.00	Peak
2	8259.000	33.81	12.35	46.15	-27.85	74.00	Peak
3	* 9908.000	32.79	14.96	47.75	-20.45	68.20	Peak
4	10605.000	31.97	17.02	48.99	-25.01	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE80 at channel 5210MHz(Beamforming Mode)	Test Voltage	120V/60Hz

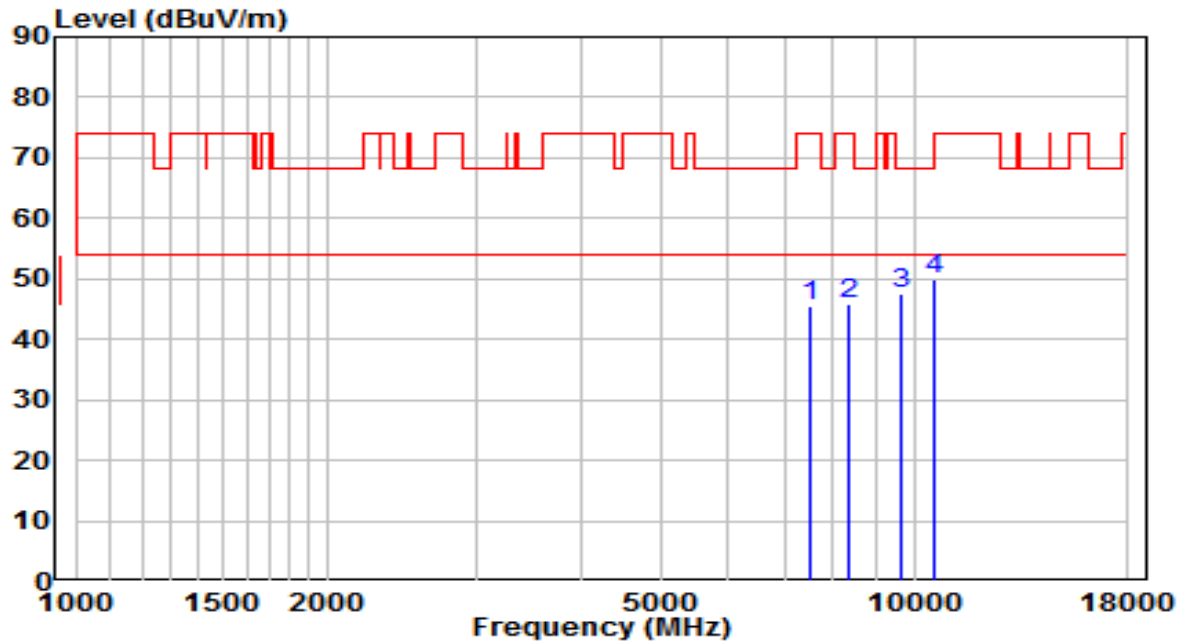


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7519.500	33.70	11.73	45.43	-28.57	74.00	Peak
2	8335.500	33.55	12.38	45.93	-28.07	74.00	Peak
3	* 9627.500	33.45	14.04	47.48	-20.72	68.20	Peak
4	10605.000	32.76	17.02	49.78	-24.22	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE80 at channel 5530MHz(Beamforming Mode)	Test Voltage	120V/60Hz

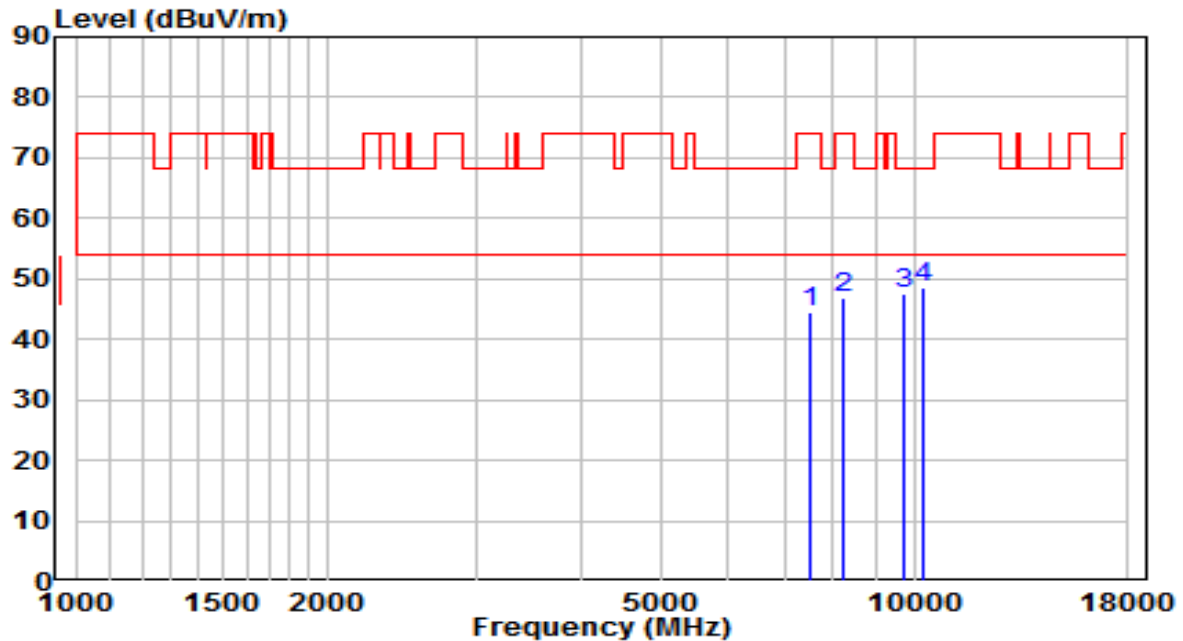


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7519.500	32.84	11.73	44.57	-29.43	74.00	Peak
2	8259.000	34.62	12.35	46.97	-27.03	74.00	Peak
3	9712.500	33.11	14.32	47.42	-20.78	68.20	Peak
4	* 10222.500	32.62	15.98	48.59	-19.61	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE80 at channel 5530MHz(Beamforming Mode)	Test Voltage	120V/60Hz

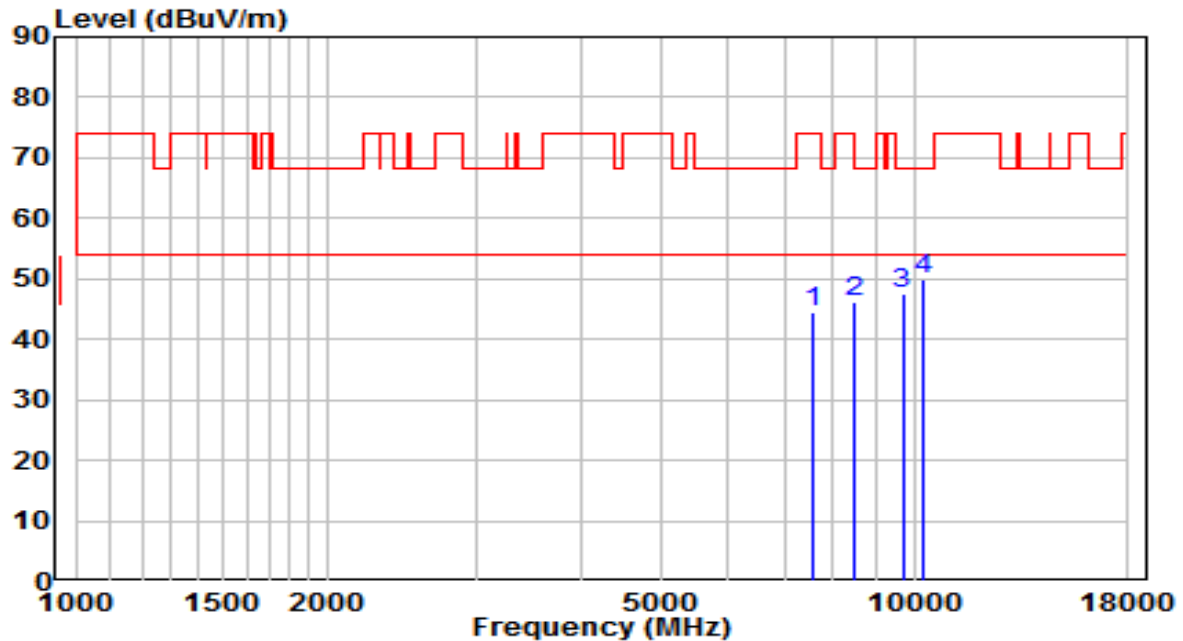


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7587.500	32.84	11.81	44.64	-29.36	74.00	Peak
2	8471.500	33.80	12.44	46.24	-27.76	74.00	Peak
3	9687.000	33.18	14.23	47.41	-20.79	68.20	Peak
4	* 10222.500	33.91	15.98	49.89	-18.31	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE80 at channel 5610MHz(Beamforming Mode)	Test Voltage	120V/60Hz

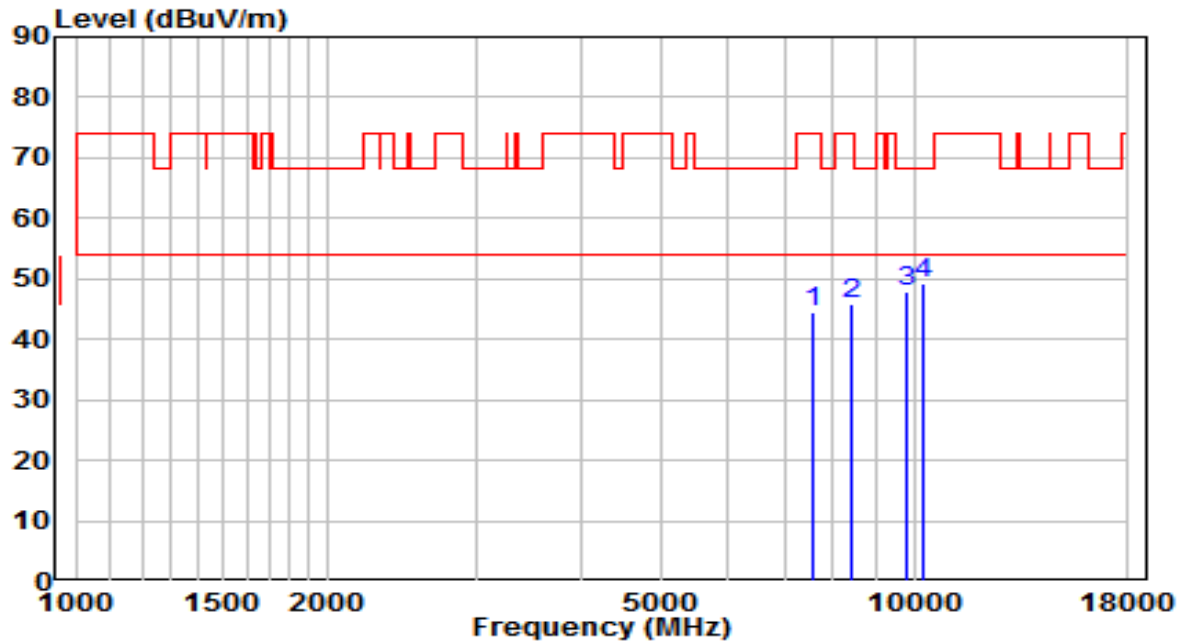


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7587.500	32.57	11.81	44.37	-29.63	74.00	Peak
2	8429.000	33.59	12.42	46.01	-27.99	74.00	Peak
3	9763.500	33.53	14.48	48.01	-20.19	68.20	Peak
4	* 10222.500	33.23	15.98	49.20	-19.00	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE80 at channel 5610MHz(Beamforming Mode)	Test Voltage	120V/60Hz

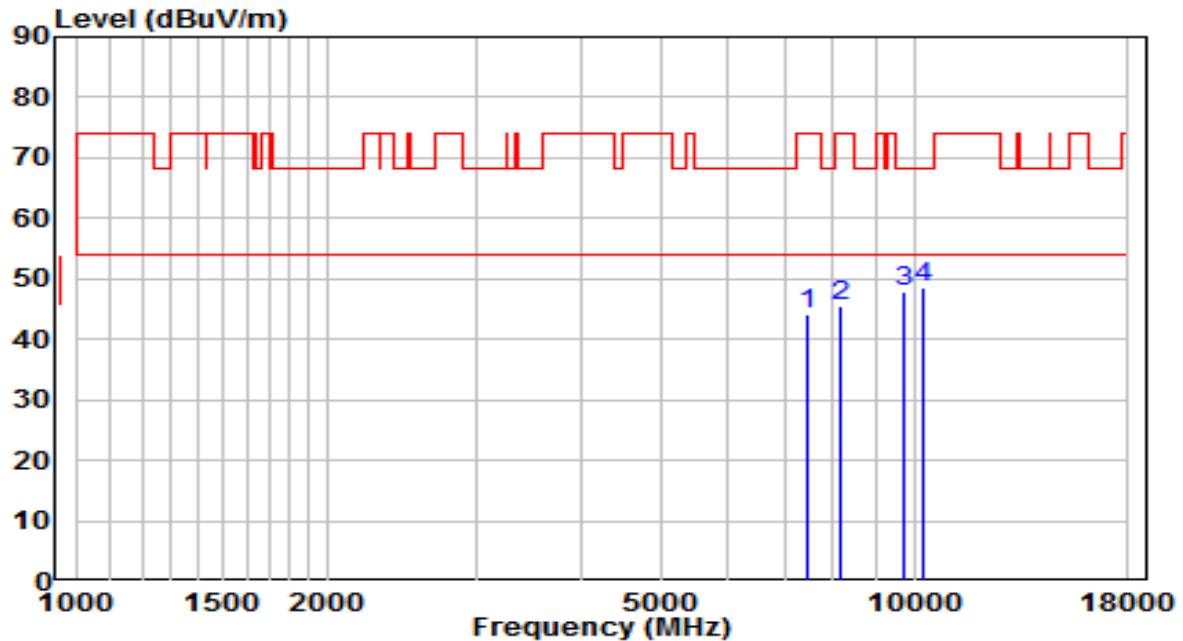


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7460.000	32.55	11.63	44.17	-29.83	74.00	Peak
2	8165.500	33.32	12.30	45.62	-28.38	74.00	Peak
3	9738.000	33.65	14.40	48.06	-20.14	68.20	Peak
4	* 10222.500	32.46	15.98	48.44	-19.76	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE80 at channel 5690MHz(Beamforming Mode)	Test Voltage	120V/60Hz

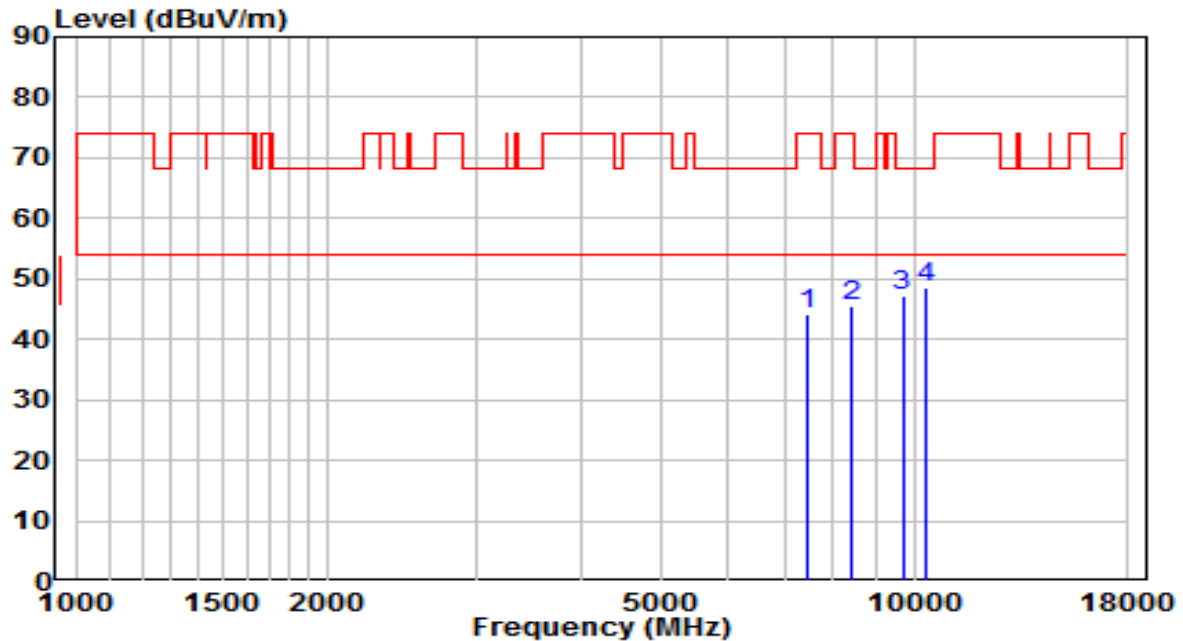


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7460.000	32.55	11.63	44.17	-29.83	74.00	Peak
2	8403.500	32.99	12.41	45.40	-28.60	74.00	Peak
3	9687.000	32.96	14.23	47.20	-21.00	68.20	Peak
4	* 10333.000	32.08	16.33	48.41	-19.79	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE80 at channel 5690MHz(Beamforming Mode)	Test Voltage	120V/60Hz

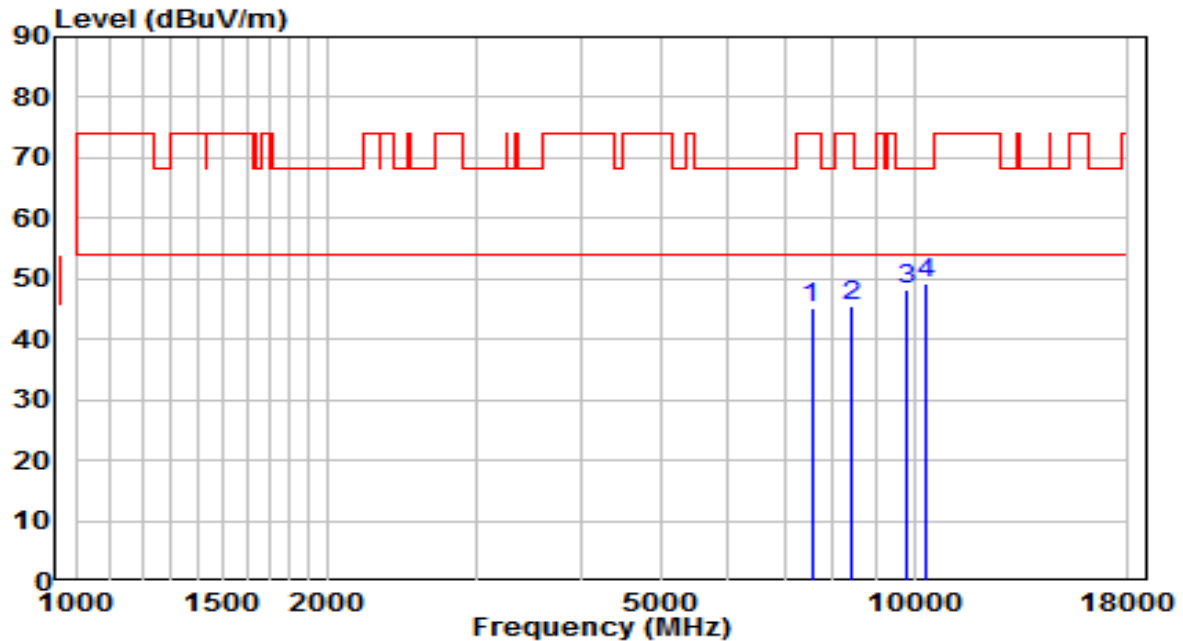


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7545.000	33.51	11.76	45.28	-28.72	74.00	Peak
2	8429.000	33.09	12.42	45.51	-28.49	74.00	Peak
3	9763.500	33.65	14.48	48.14	-20.06	68.20	Peak
4	* 10333.000	32.80	16.33	49.13	-19.07	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE80 at channel 5775MHz(Beamforming Mode)	Test Voltage	120V/60Hz

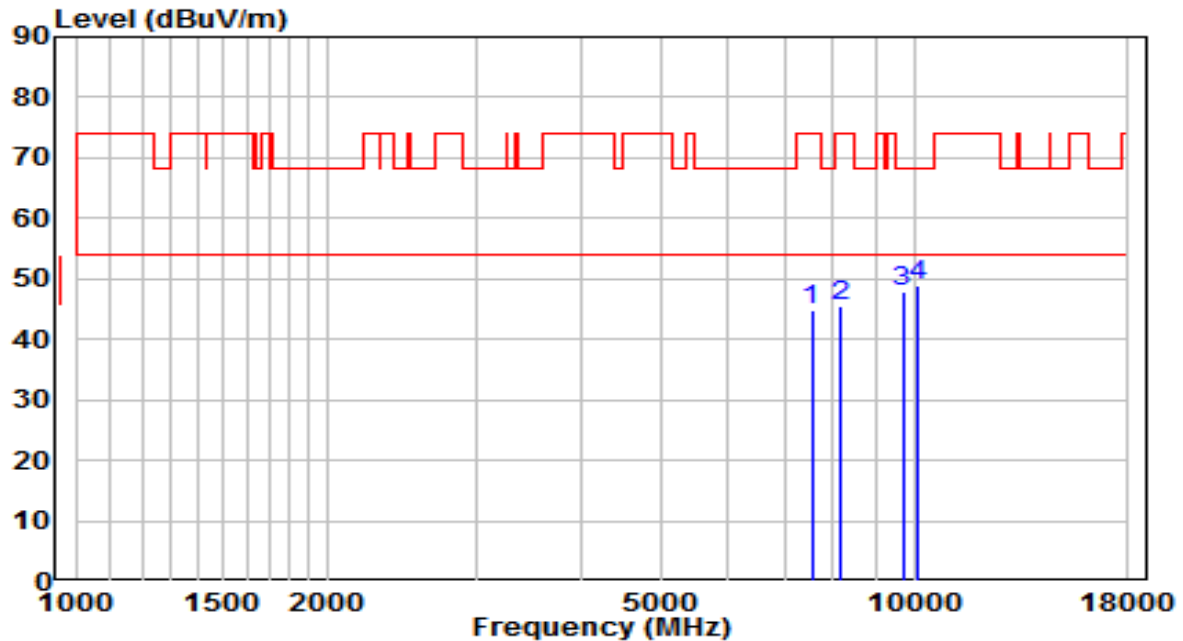


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7545.000	32.95	11.76	44.71	-29.29	74.00	Peak
2	8165.500	33.31	12.30	45.62	-28.38	74.00	Peak
3	9687.000	33.49	14.23	47.72	-20.48	68.20	Peak
4	* 10129.000	33.07	15.67	48.74	-19.46	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE80 at channel 5775MHz(Beamforming Mode)	Test Voltage	120V/60Hz

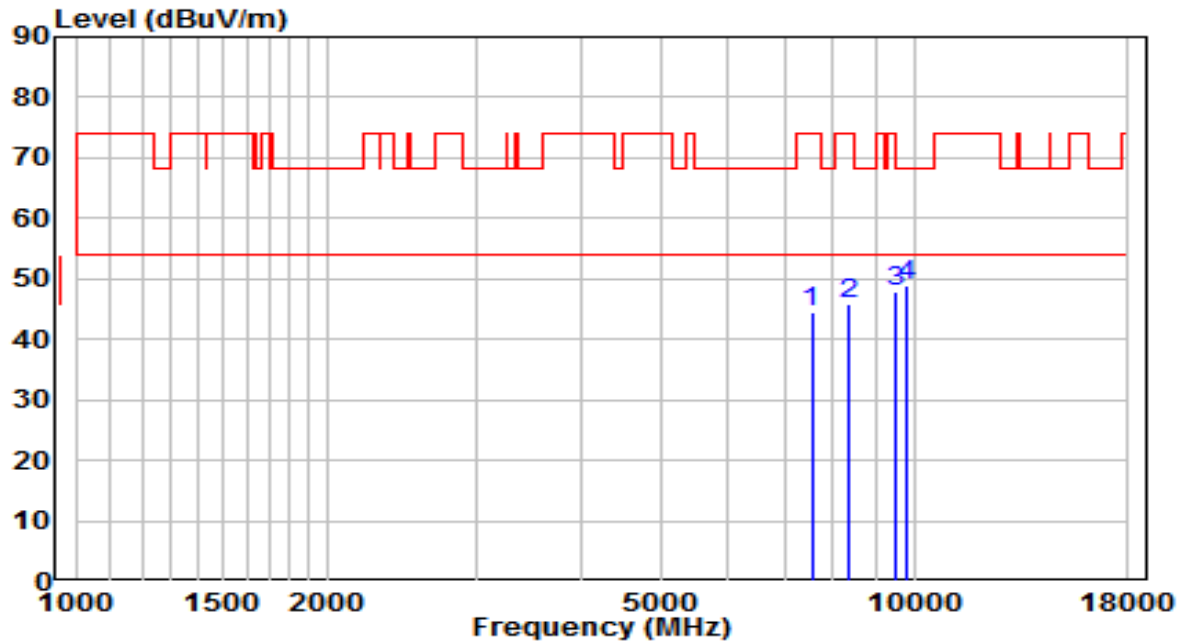


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7545.000	32.70	11.76	44.46	-29.54	74.00	Peak
2	8378.000	33.41	12.40	45.81	-28.19	74.00	Peak
3	9517.000	34.21	13.68	47.88	-20.32	68.20	Peak
4	* 9763.500	34.51	14.48	49.00	-19.20	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE160 at channel 5570MHz(Beamforming Mode)	Test Voltage	120V/60Hz

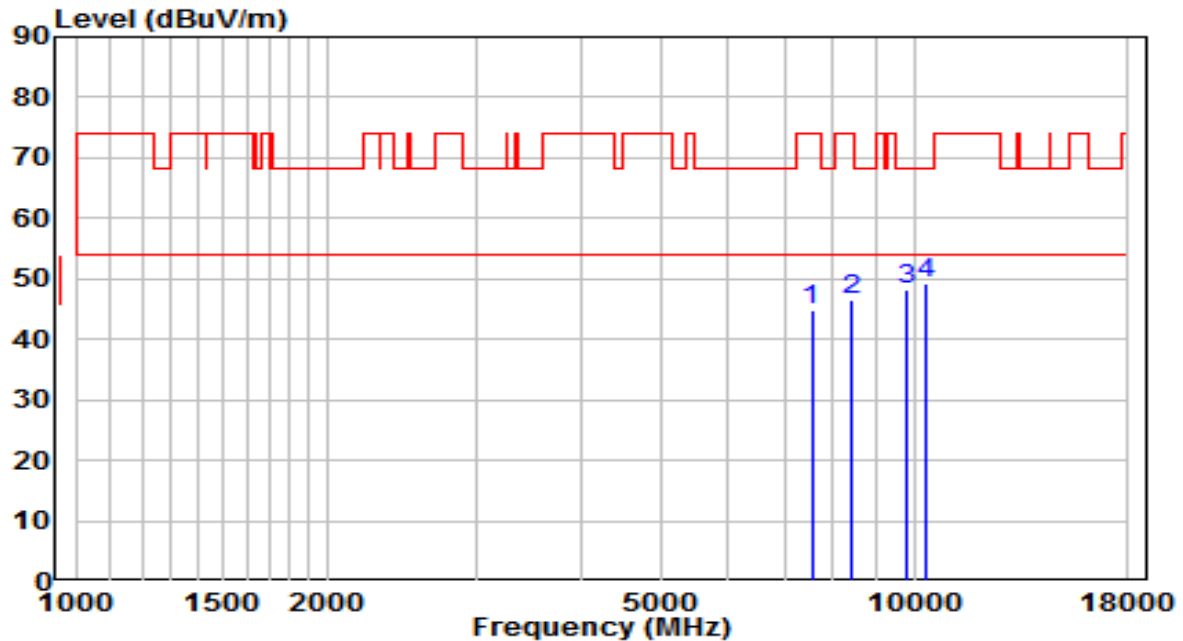


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7545.000	33.09	11.76	44.85	-29.15	74.00	Peak
2	8403.500	34.11	12.41	46.52	-27.48	74.00	Peak
3	9763.500	33.74	14.48	48.22	-19.98	68.20	Peak
4	* 10333.000	32.84	16.33	49.18	-19.02	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-18
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.6°C/45.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Transmit at 802.11 ax-HE160 at channel 5570MHz(Beamforming Mode)	Test Voltage	120V/60Hz

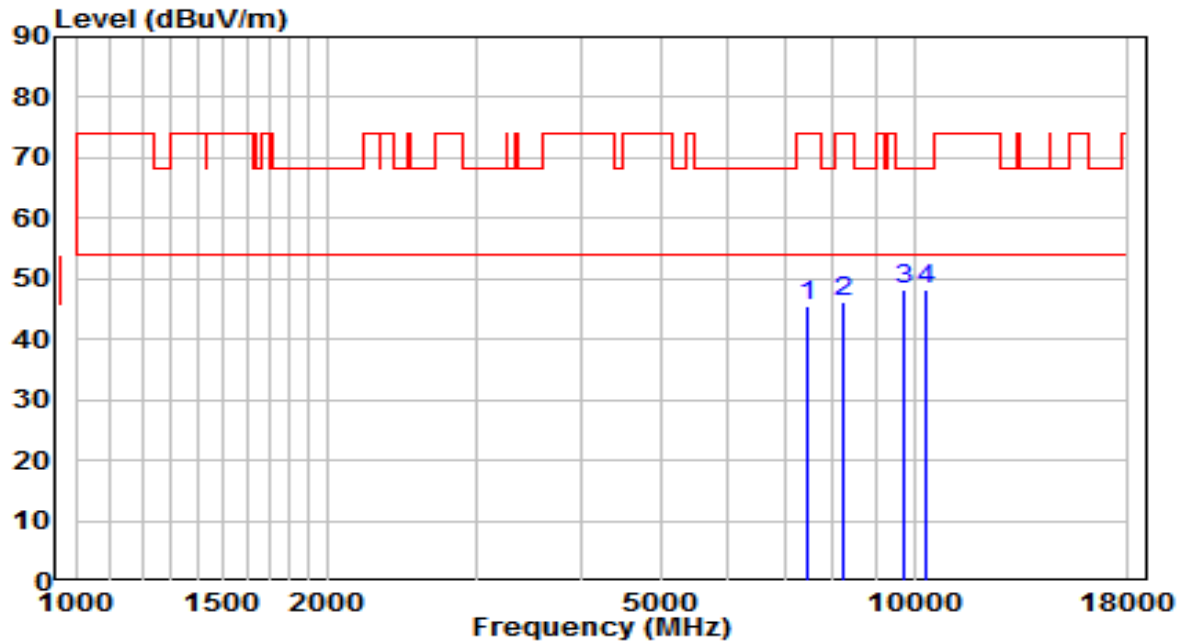


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7434.500	34.05	11.57	45.62	-28.38	74.00	Peak
2	8259.000	33.99	12.35	46.33	-27.67	74.00	Peak
3	* 9738.000	33.93	14.40	48.33	-19.87	68.20	Peak
4	10333.000	31.94	16.33	48.27	-19.93	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

The Worst Case of Radiated Emission below 1GHz:

EUT	AX6600 TRI-BAND WI-FI 6 ROUTER	Date of Test	2020-05-18
Factor	TW VULB 9162 30MHz-8GHz_2019	Temp. / Humidity	22.4°C/39.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Worse Case	Test Voltage	120V/60Hz

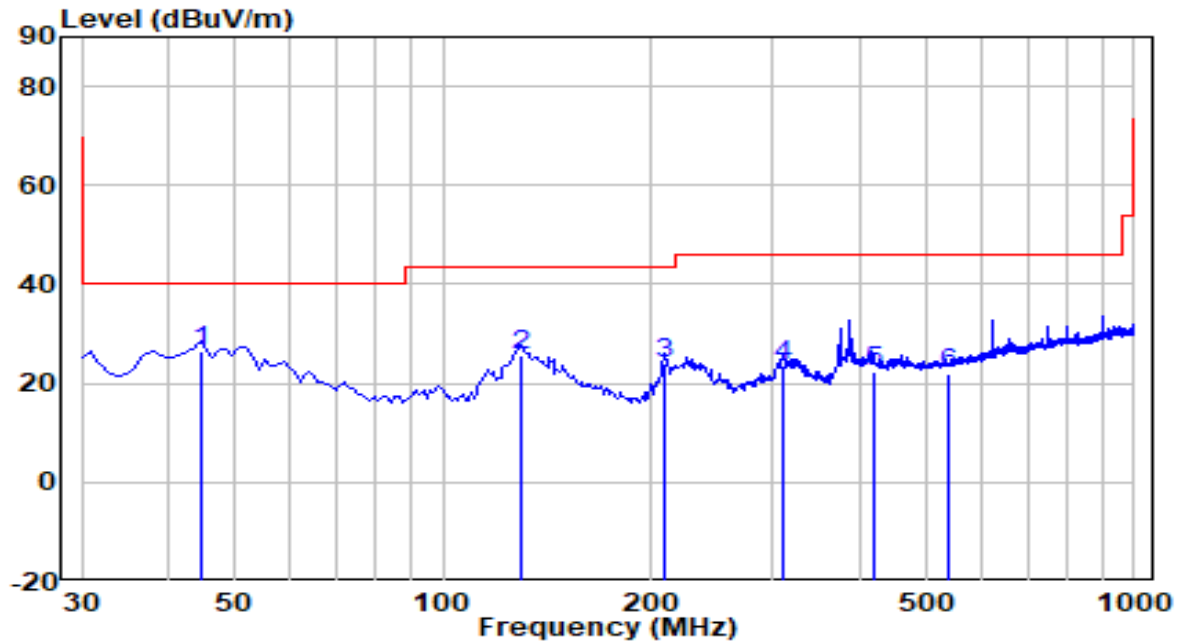


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	44.550	5.08	21.33	26.41	-13.59	40.00	QP
2		129.910	9.60	15.99	25.59	-17.91	43.50	QP
3		209.450	5.29	18.61	23.90	-19.60	43.50	QP
4		309.360	1.84	21.78	23.62	-22.38	46.00	QP
5		420.910	-2.02	24.47	22.45	-23.55	46.00	QP
6		537.310	-4.63	26.41	21.78	-24.22	46.00	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 TRI-BAND WI-FI 6 ROUTER	Date of Test	2020-05-18
Factor	TW VULB 9162 30MHz-8GHz_2019	Temp. / Humidity	22.4°C/39.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin Ker
Test Mode	Worse Case	Test Voltage	120V/60Hz

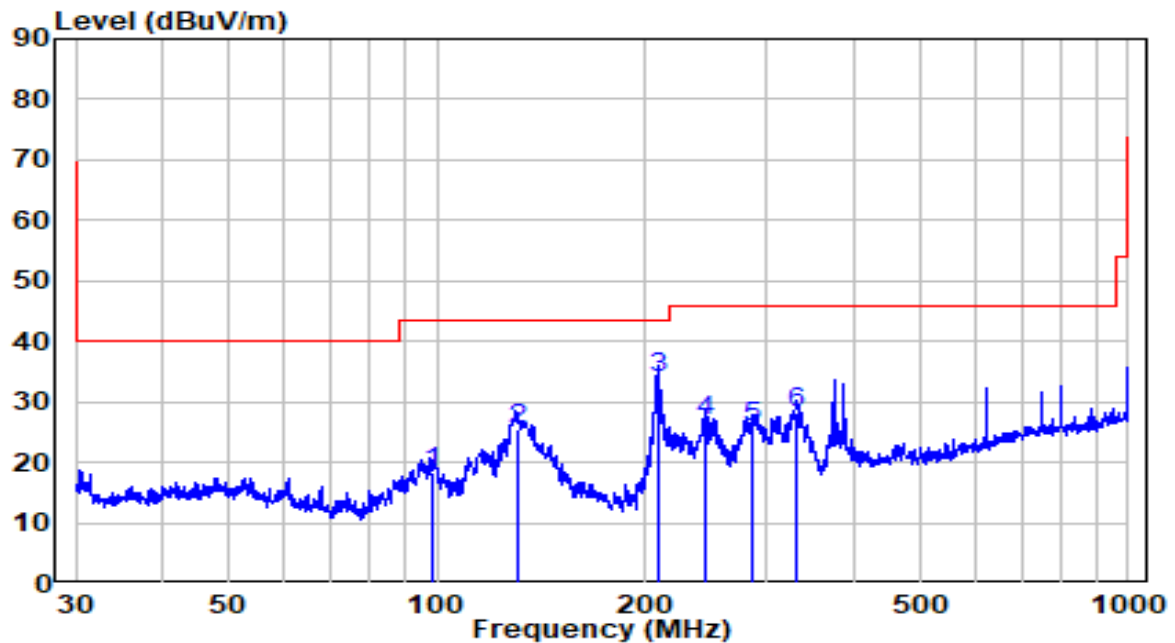

No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	98.487	-0.87	19.25	18.38	-25.12	43.50	QP
2	130.837	9.58	15.94	25.52	-17.98	43.50	QP
3	* 208.580	15.26	18.64	33.90	-9.60	43.50	QP
4	244.232	6.54	20.34	26.88	-19.12	46.00	QP
5	286.982	4.74	21.20	25.94	-20.06	46.00	QP
6	330.774	5.53	22.65	28.18	-17.82	46.00	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.9. Radiated Restricted Band Edge Measurement

7.9.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42-16.423	399.9 - 410	4.5-5.15
¹ 0.495 - 0.505	16.69475-16.69525	608 - 614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960 - 1240	7.25-7.75
4.125-4.128	25.5 -25.67	1300 - 1427	8.025 - 8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660 - 1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123 - 138	2200 - 2300	14.47-14.5
8.291-8.294	149.9-150.05	2310 - 2390	15.35-16.2
8.362-8.366	156.52475-156.525	2483.5 - 2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690 - 2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260 - 3267	23.6-24.0
12.29-12.293	167.72-173.2	3332 - 3339	31.2-31.8
12.51975-12.52025	240 - 285	3345.8 - 3358	36.43-36.5
12.57675-12.57725	322-335.4	3600 - 4400	(²)
13.36-13.41	--	--	--

For 15.407(b) requirement:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge

increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Refer to KDB 789033 D02v02r01 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz maximum emission limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.9.2. Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

7.9.3.Test Setting


Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBWIf the EUT is configured to transmit with duty cycle $\geq 98\%$, set $VBW \leq RBW/100$ (i.e., 10 kHz) but not less than 10 Hz. If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$.
4. Detector = Peak
5. Sweep time = auto
6. Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98% duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.

7.9.4.Test Setup

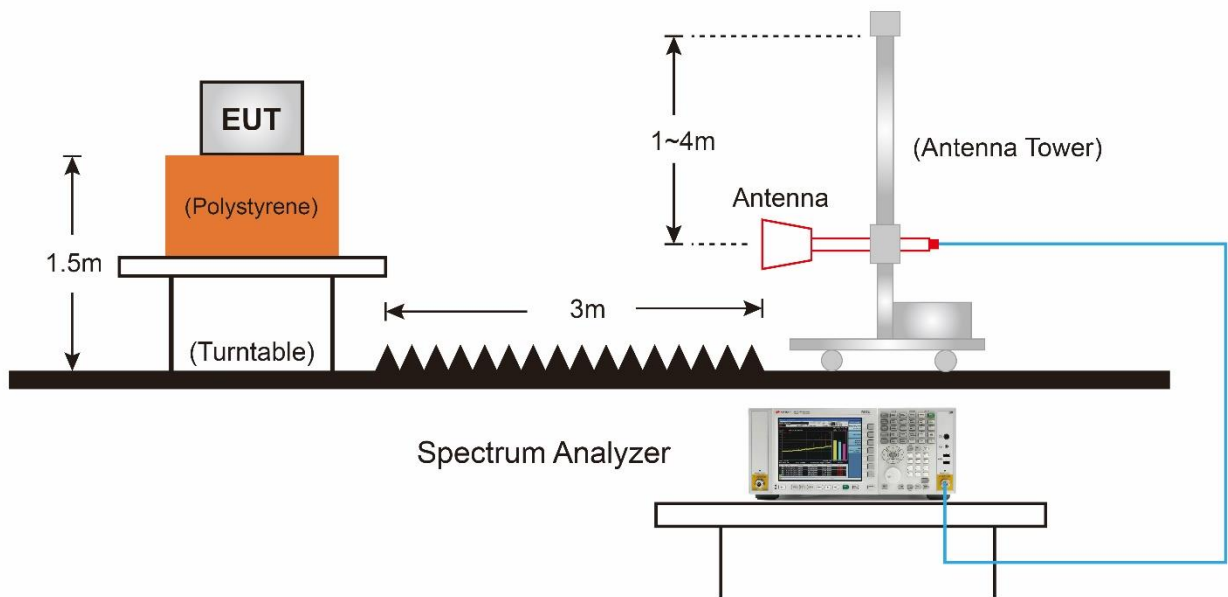

7.9.5.Test Result

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	18°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11a at channel 5180MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

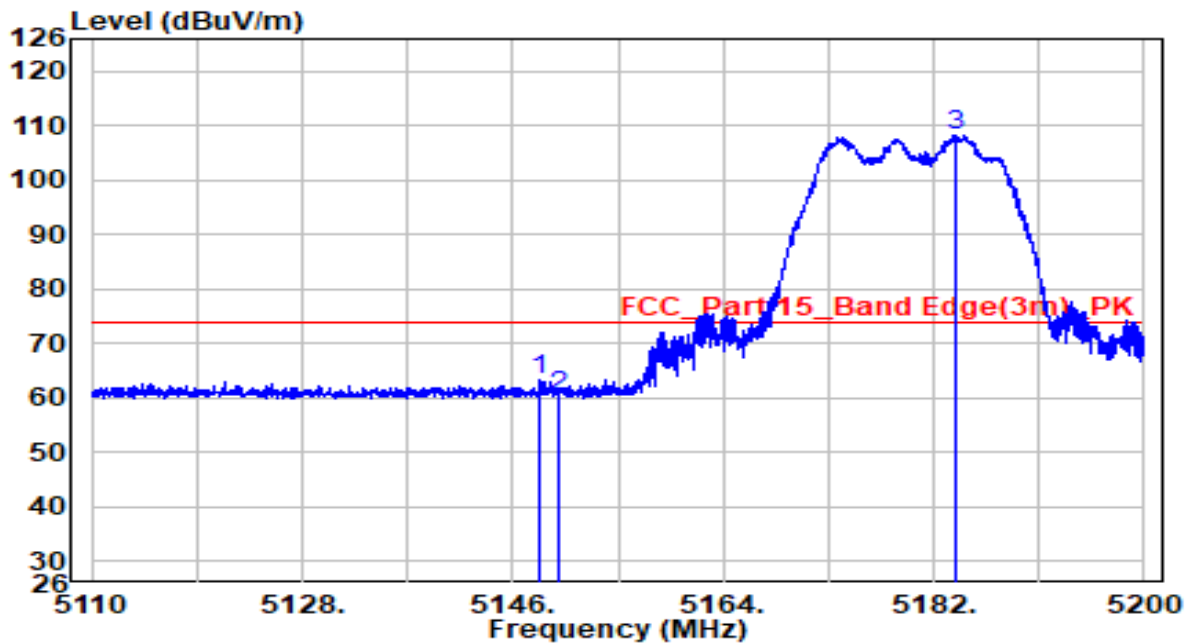


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.385	43.31	19.90	63.21	-10.79	74.00	Peak
2	5150.000	40.57	19.91	60.48	-13.52	74.00	Peak
3	* 5183.890	88.43	19.94	108.38	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	18°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11a at channel 5180MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

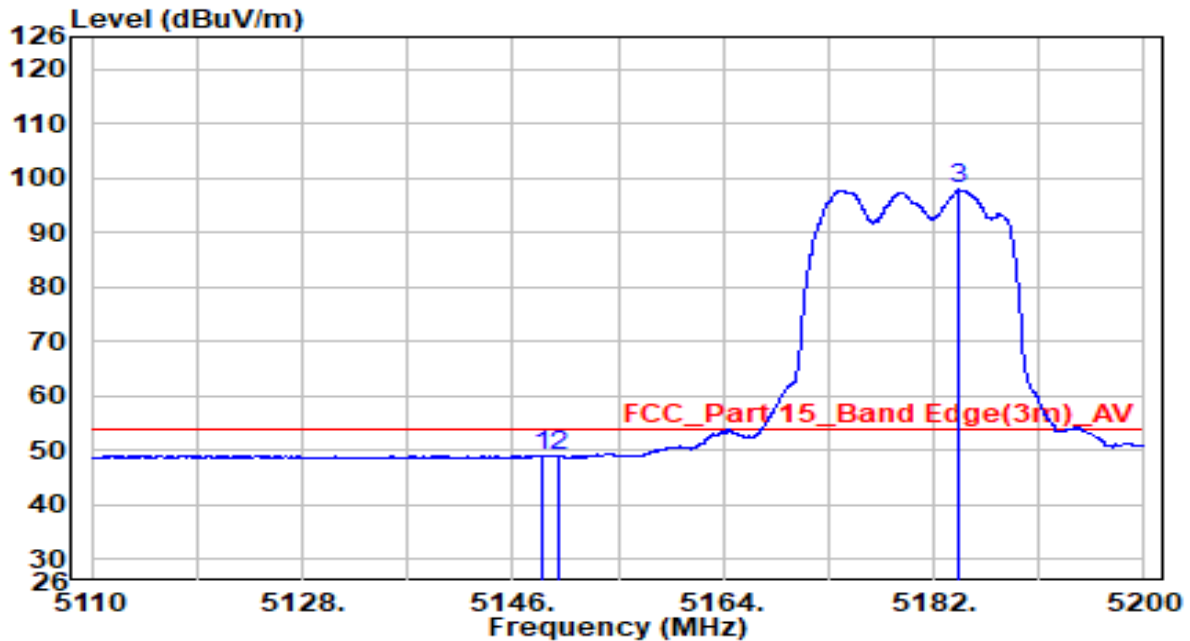


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.430	29.25	19.90	49.16	-4.84	54.00	Average
2	5150.000	28.96	19.91	48.87	-5.13	54.00	Average
3	* 5184.205	78.05	19.94	97.99	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	18°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11a at channel 5180MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

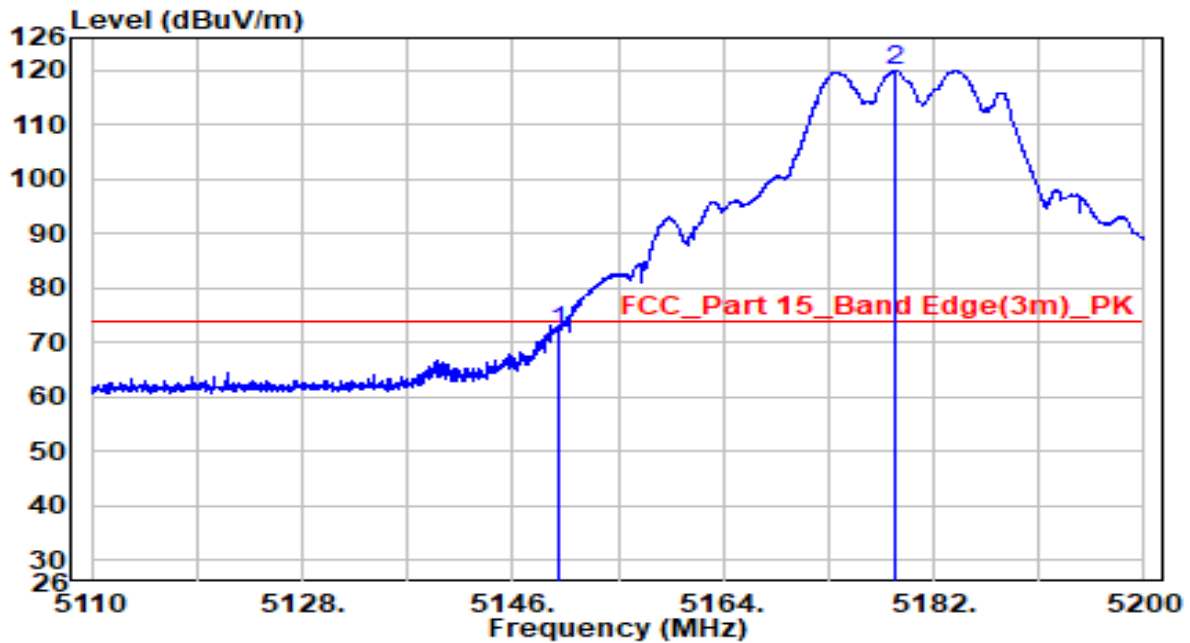


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	52.12	19.91	72.03	-1.97	74.00	Peak
2	* 5178.760	100.11	19.94	120.04	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	18°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11a at channel 5180MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

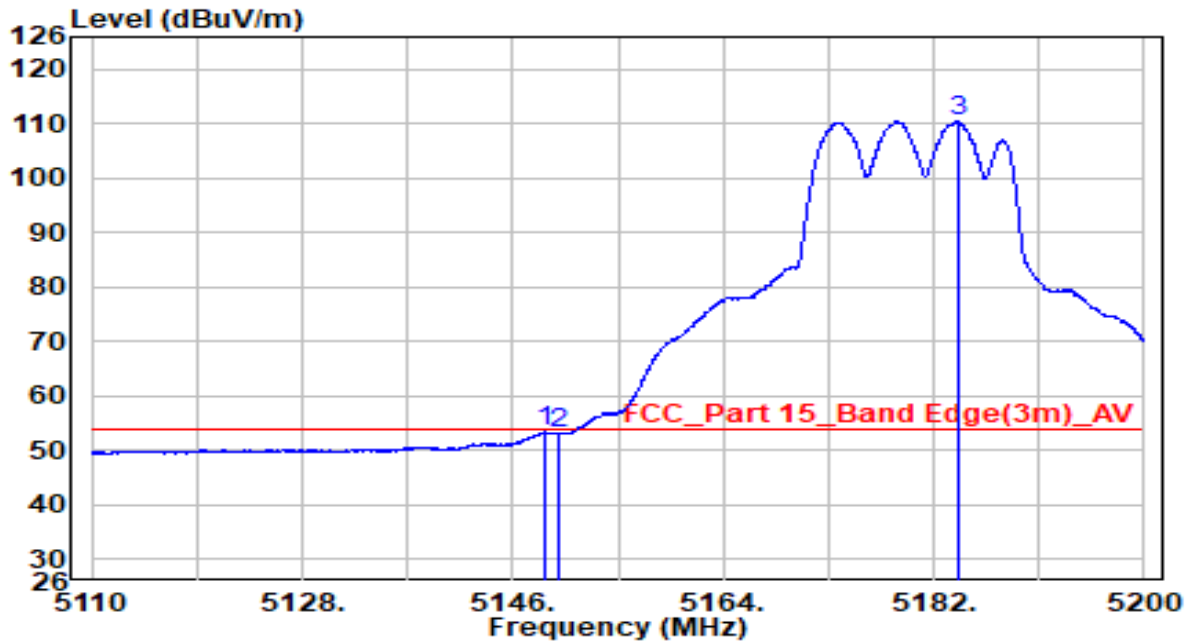


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.745	33.46	19.90	53.36	-0.64	54.00	Average
2	5150.000	33.31	19.91	53.22	-0.78	54.00	Average
3	* 5184.025	90.58	19.94	110.52	N/A	N/A	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	18°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11a at channel 5500MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

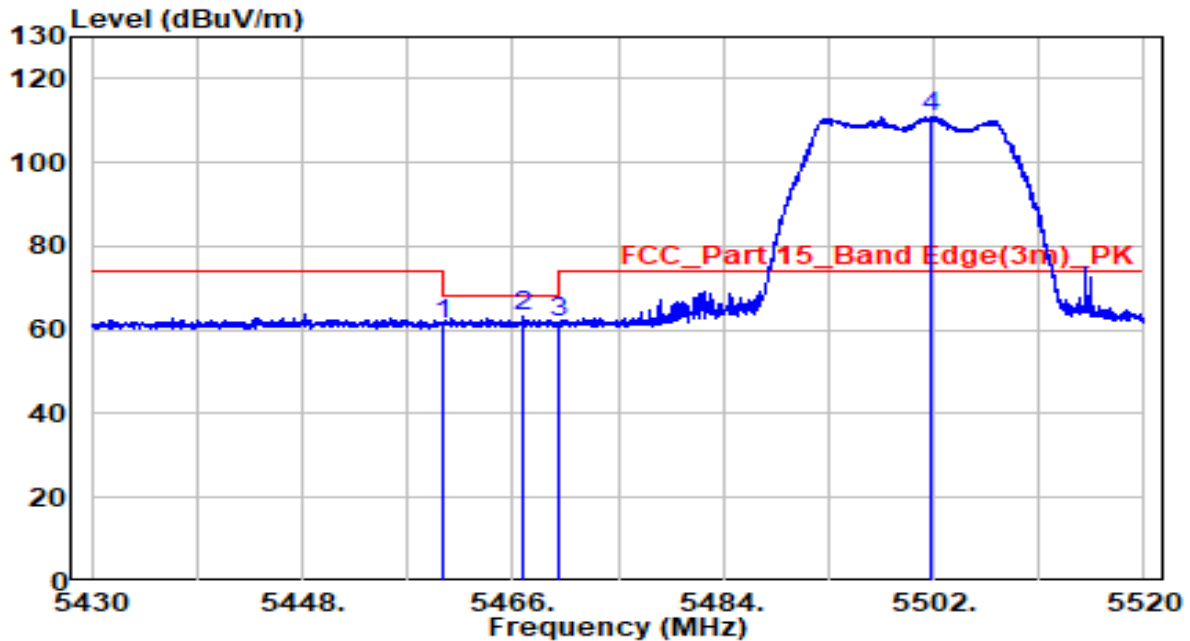


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	40.85	20.23	61.08	-7.12	68.20	Peak
2	5466.810	43.05	20.24	63.29	-4.91	68.20	Peak
3	5470.000	41.80	20.24	62.04	-6.16	68.20	Peak
4	* 5501.865	90.58	20.28	110.86	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	18°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11a at channel 5500MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

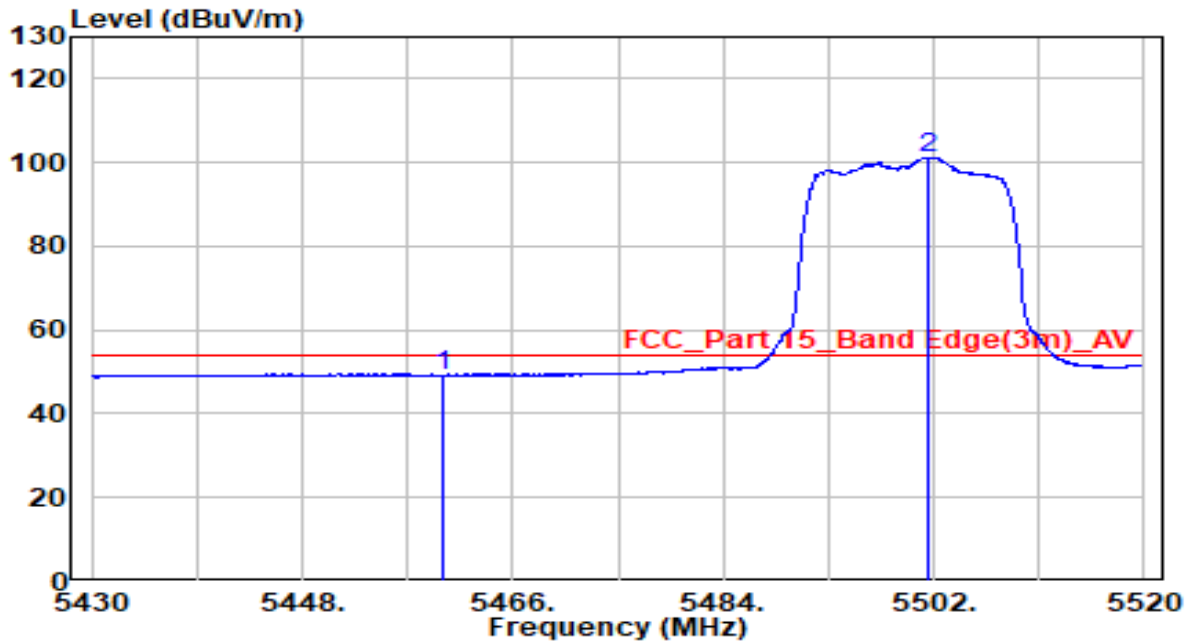


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	29.06	20.23	49.29	-4.71	54.00	Average
2	* 5501.460	80.91	20.27	101.18	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	18°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11a at channel 5500MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

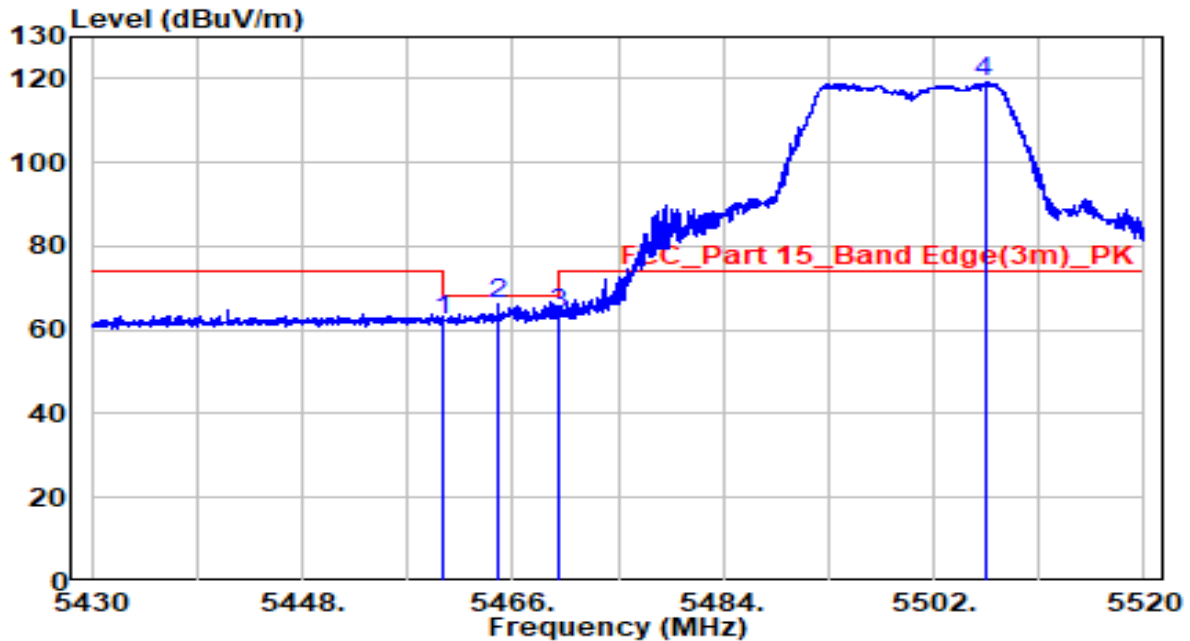


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.015	41.88	20.23	62.11	-6.09	68.20	Peak
2	5464.695	45.81	20.23	66.04	-2.16	68.20	Peak
3	5470.000	43.54	20.24	63.78	-4.42	68.20	Peak
4	* 5506.365	98.76	20.29	119.05	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	18°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11a at channel 5500MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

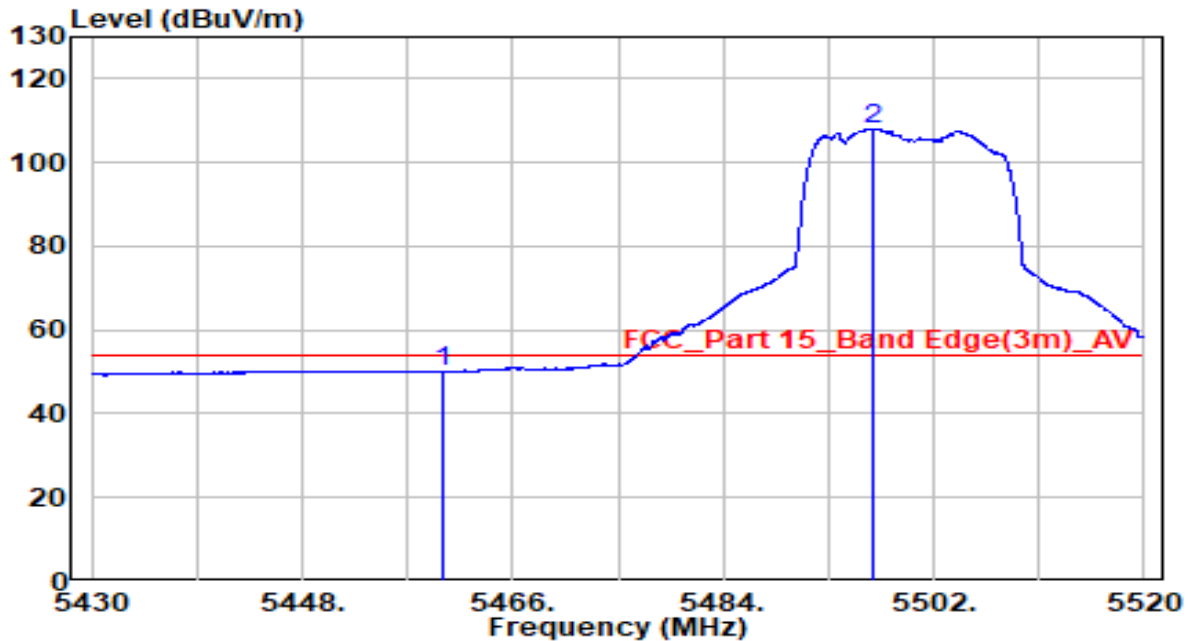


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	29.79	20.23	50.02	-3.98	54.00	Average
2	* 5496.870	87.82	20.27	108.09	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	18°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11a at channel 5700MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

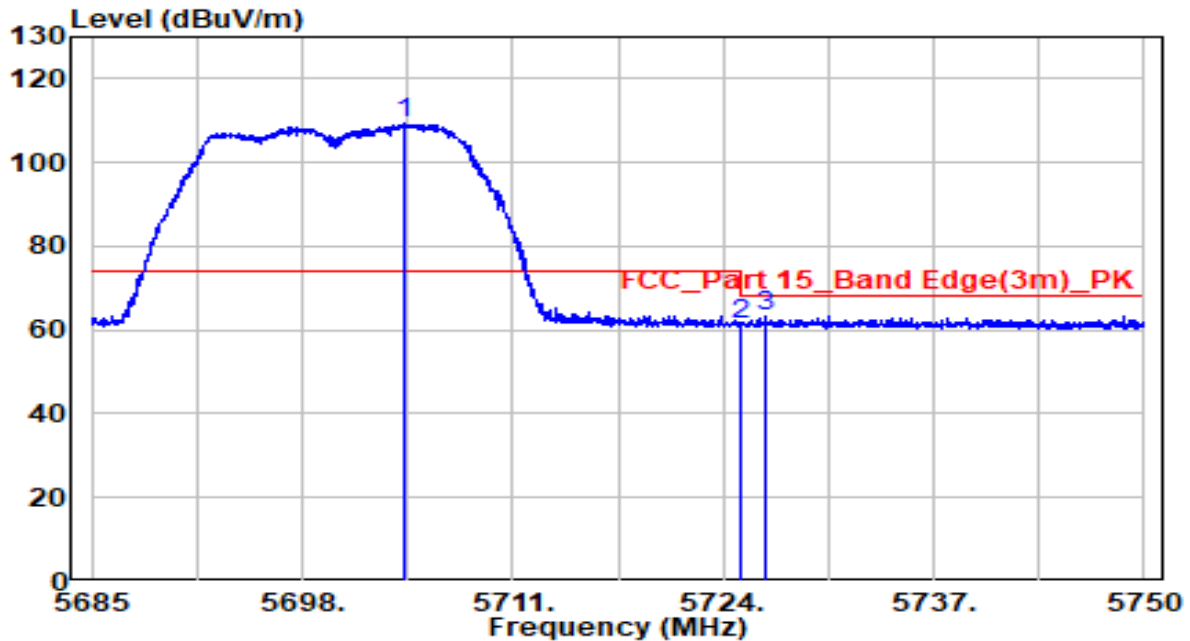


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5704.305	88.25	20.93	109.18	N/A	N/A	Peak
2		5725.000	40.22	21.00	61.22	-6.98	68.20	Peak
3		5726.665	42.07	21.00	63.07	-5.13	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	18°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11a at channel 5700MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

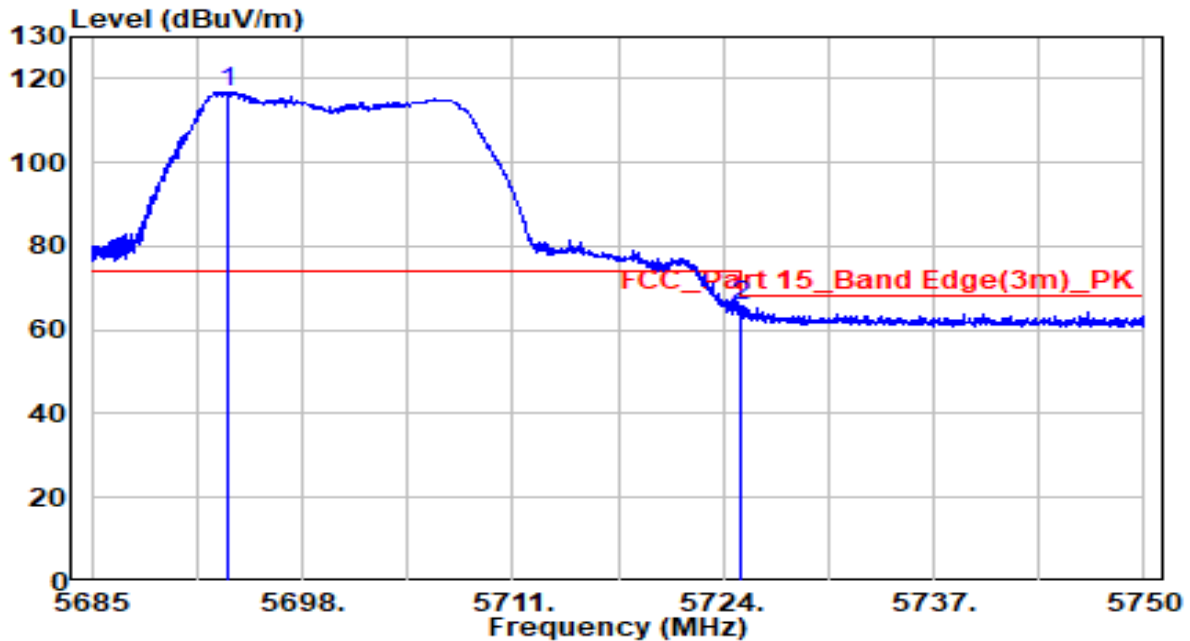


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5693.482	96.05	20.90	116.94	N/A	N/A	Peak
2		5725.000	44.97	21.00	65.97	-2.23	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11a at channel 5745MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

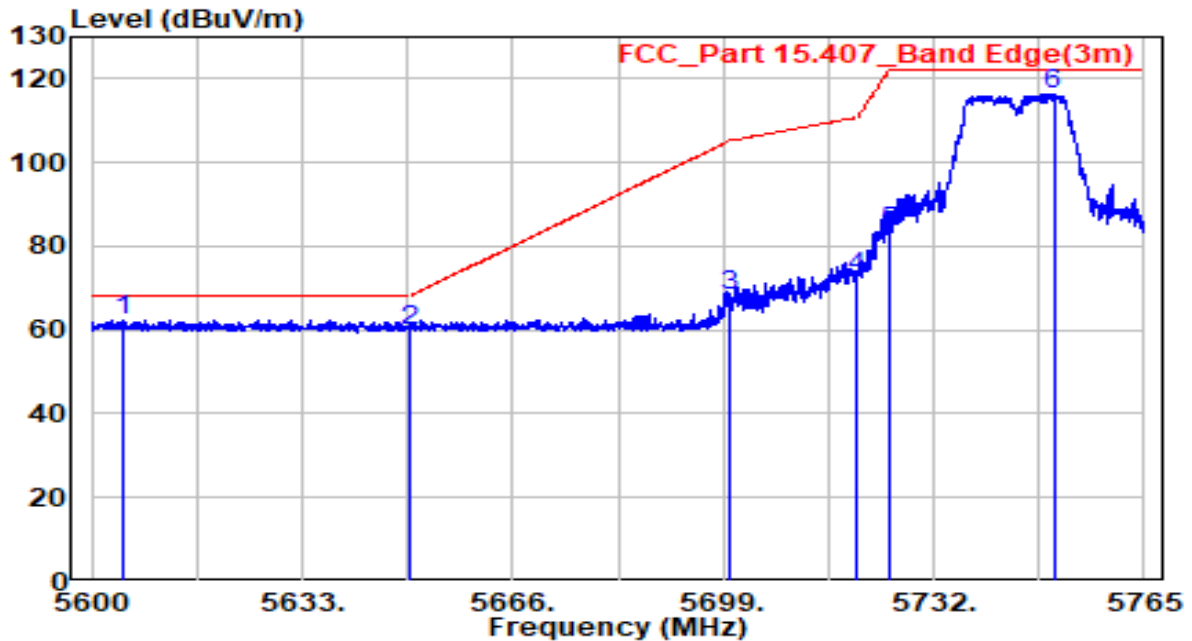


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5605.115	41.92	20.61	62.53	-5.67	68.20	Peak
2		5650.000	39.02	20.76	59.77	-8.43	68.20	Peak
3		5700.000	47.43	20.92	68.35	-36.85	105.20	Peak
4		5720.000	51.85	20.98	72.83	-37.97	110.80	Peak
5		5725.000	62.34	21.00	83.34	-38.86	122.20	Peak
6		5750.810	95.31	21.08	116.40	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11a at channel 5745MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

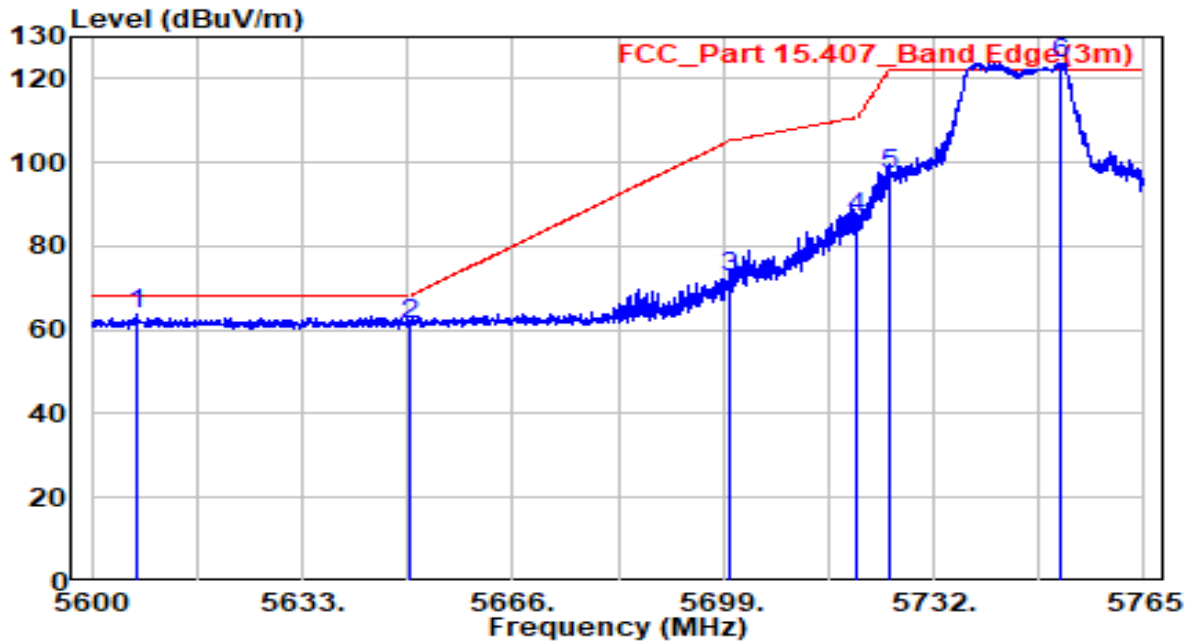


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5607.260	43.03	20.62	63.65	-4.55	68.20	Peak
2	5650.000	40.68	20.76	61.44	-6.76	68.20	Peak
3	5700.000	51.63	20.92	72.55	-32.65	105.20	Peak
4	5720.000	65.72	20.98	86.70	-24.10	110.80	Peak
5	5725.000	76.32	21.00	97.32	-24.88	122.20	Peak
6	* 5751.717	102.75	21.09	123.83	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11a at channel 5825MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

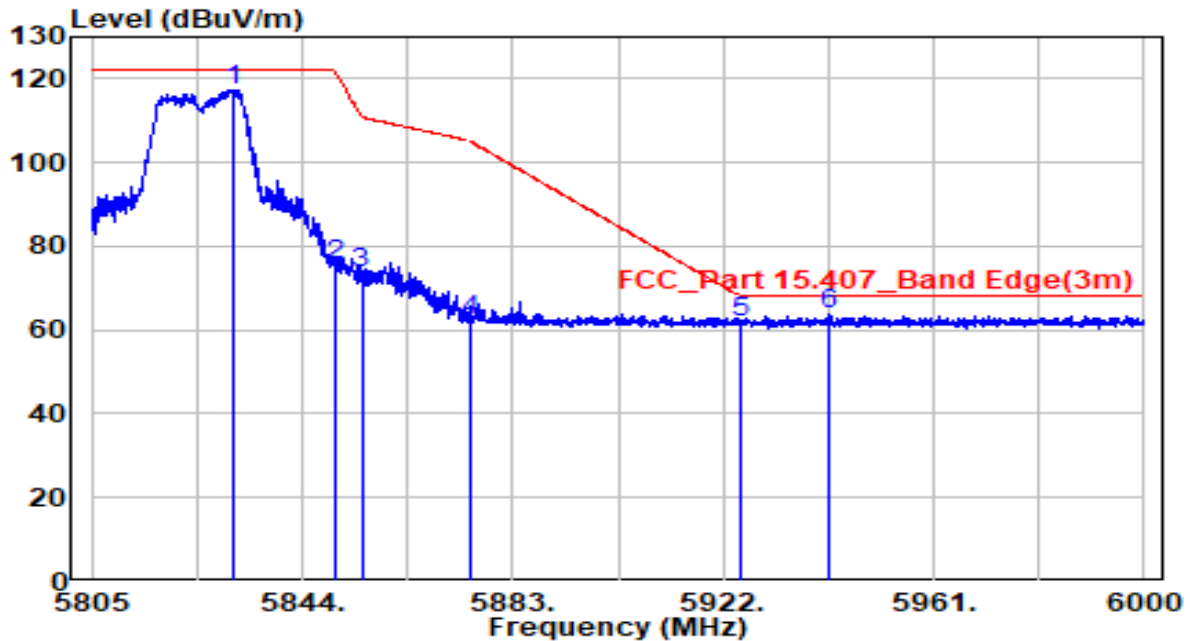


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5831.033	96.13	21.34	117.47	N/A	N/A	Peak
2	5850.000	54.39	21.40	75.79	-46.41	122.20	Peak
3	5855.000	52.19	21.42	73.61	-37.19	110.80	Peak
4	5875.000	40.97	21.49	62.46	-42.74	105.20	Peak
5	5925.000	40.09	21.65	61.74	-6.46	68.20	Peak
6	* 5941.402	42.21	21.70	63.91	-4.29	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11a at channel 5825MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

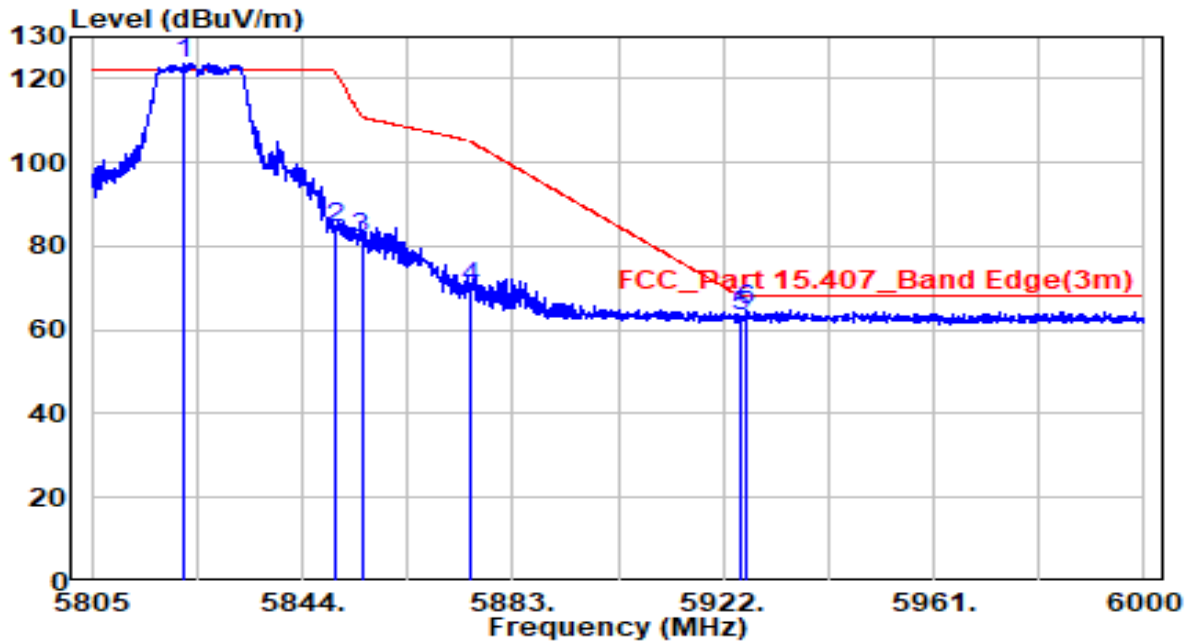


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5822.160	102.35	21.31	123.66	N/A	N/A	Peak
2		5850.000	63.03	21.40	84.43	-37.77	122.20	Peak
3		5855.000	60.45	21.42	81.87	-28.93	110.80	Peak
4		5875.000	48.57	21.49	70.06	-35.14	105.20	Peak
5		5925.000	41.60	21.65	63.25	-4.95	68.20	Peak
6		5926.388	43.13	21.65	64.78	-3.42	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	18°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac20 at channel 5180MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

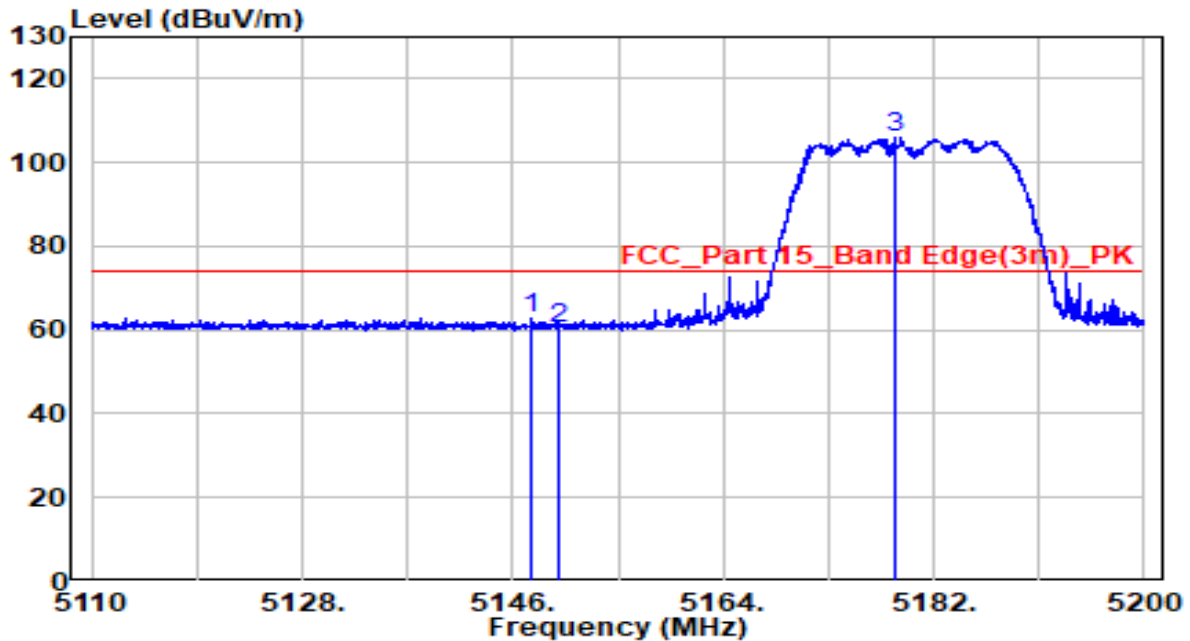


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5147.665	43.13	19.90	63.03	-10.97	74.00	Peak
2	5150.000	40.52	19.91	60.42	-13.58	74.00	Peak
3	* 5178.670	86.16	19.94	106.09	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	18°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac20 at channel 5180MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

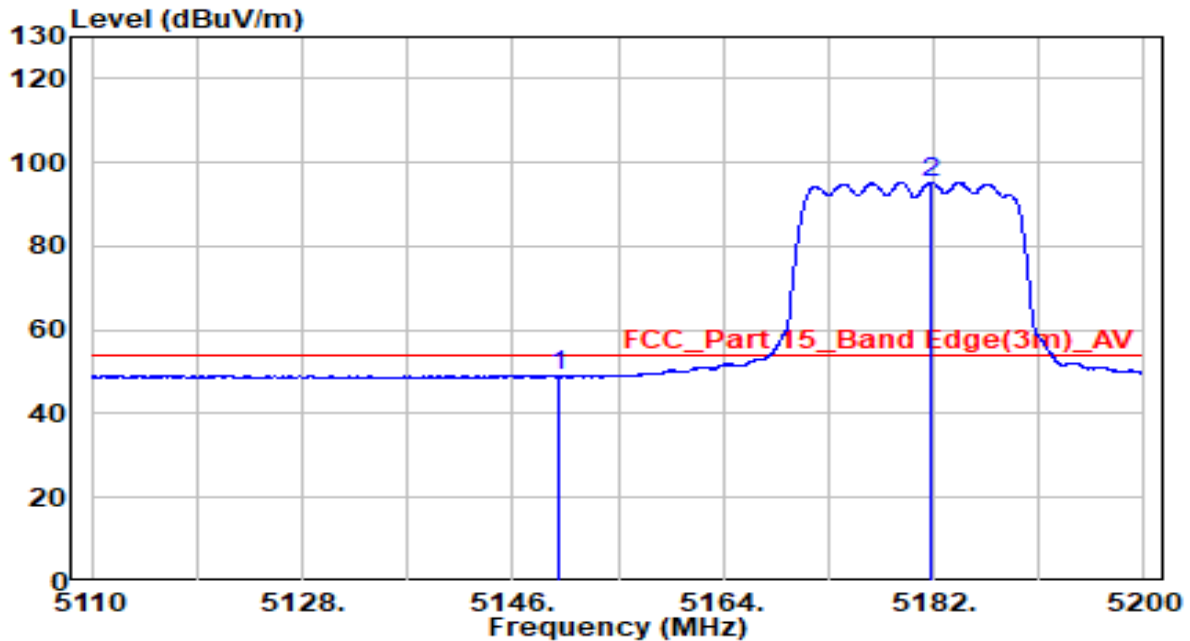


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	29.05	19.91	48.96	-5.04	54.00	Average
2	* 5181.775	75.40	19.94	95.34	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	18°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac20 at channel 5180MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

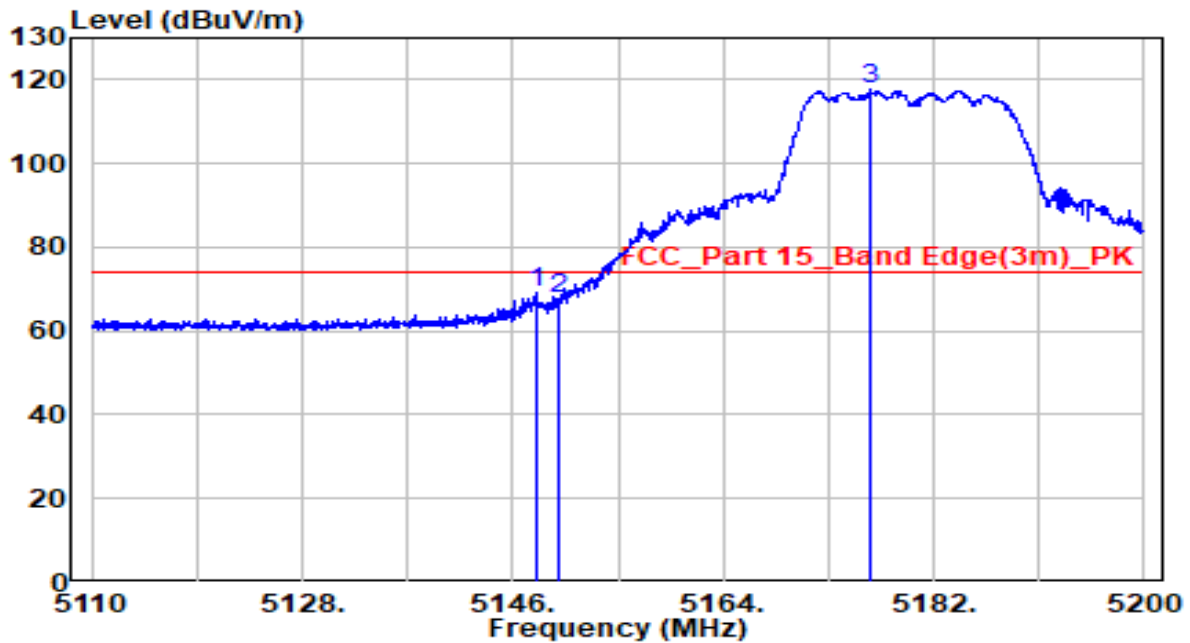


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.025	49.33	19.90	69.23	-4.77	74.00	Peak
2	5150.000	47.59	19.91	67.50	-6.50	74.00	Peak
3	* 5176.600	97.67	19.93	117.60	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	18°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac20 at channel 5180MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

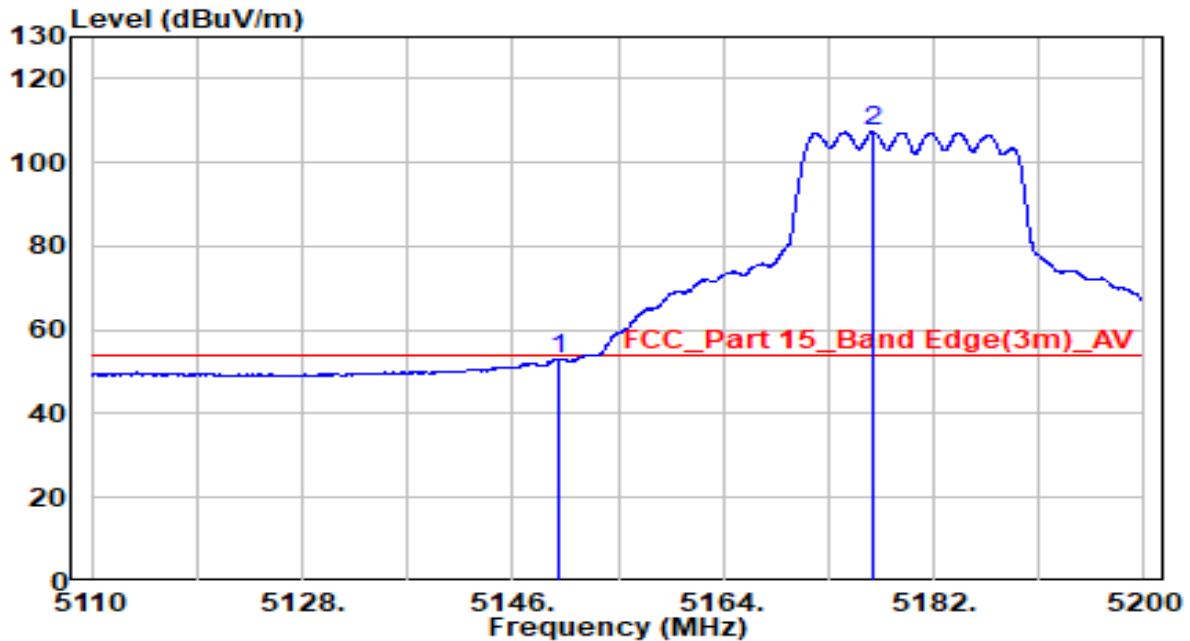


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	32.89	19.91	52.79	-1.21	54.00	Average
2	* 5176.780	87.32	19.93	107.25	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	18°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac20 at channel 5500MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

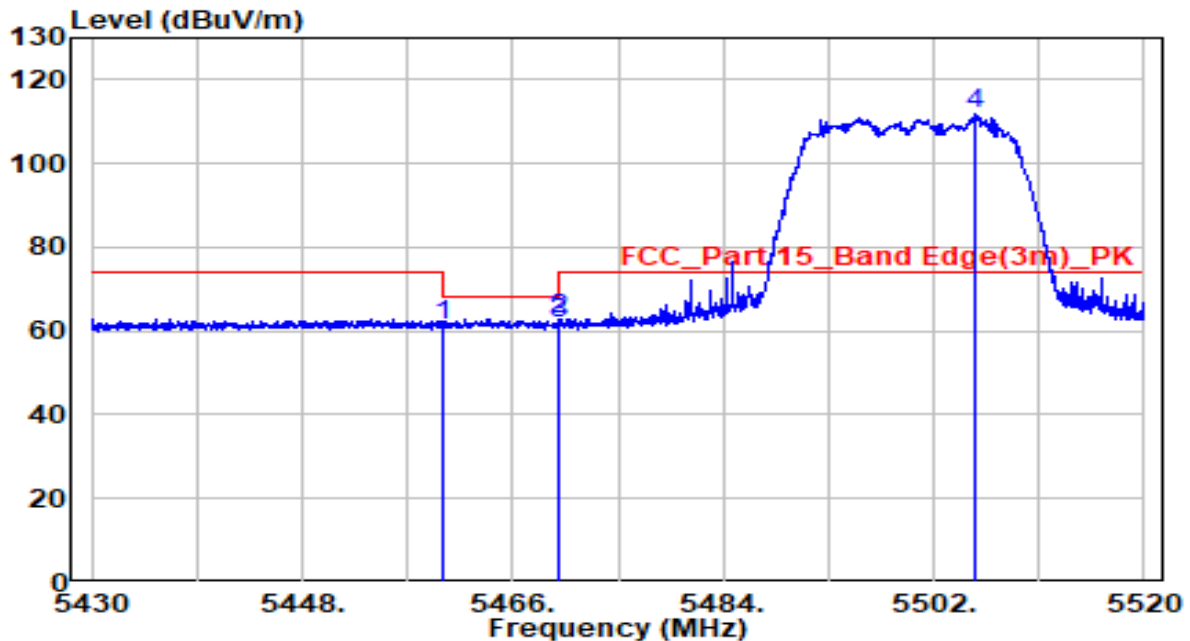


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	40.85	20.23	61.08	-7.12	68.20	Peak
2	5469.825	42.72	20.24	62.96	-5.24	68.20	Peak
3	5470.000	41.65	20.24	61.89	-6.31	68.20	Peak
4	* 5505.645	91.32	20.29	111.61	N/A	N/A	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	18°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac20 at channel 5500MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

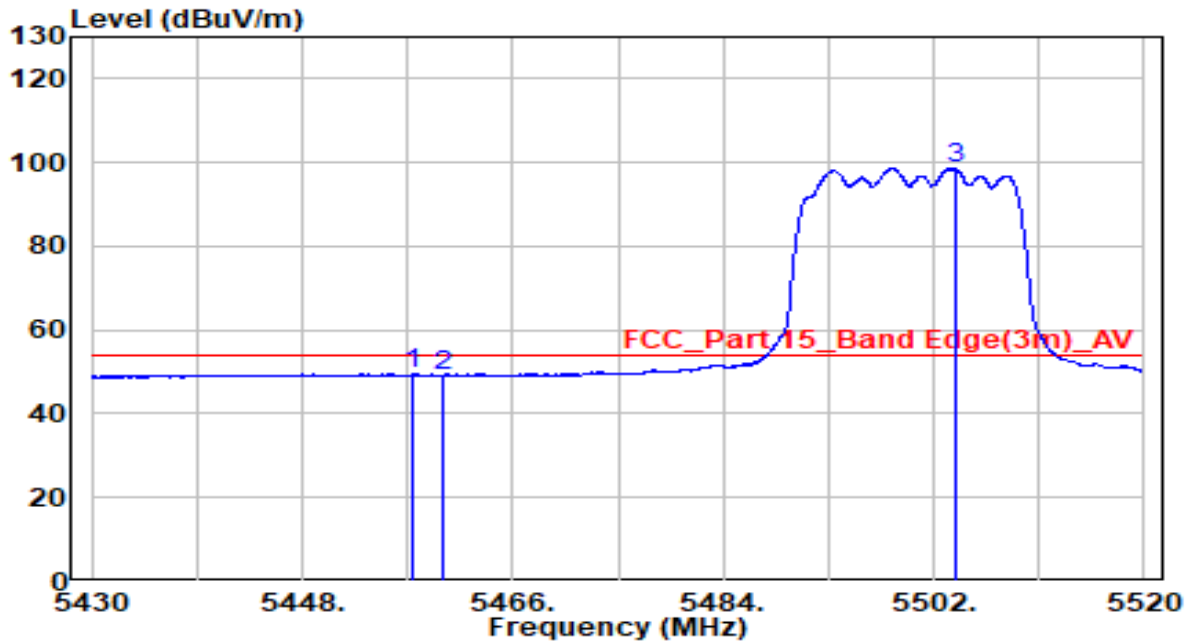


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5457.540	29.22	20.23	49.45	-4.55	54.00	Average
2	5460.000	29.06	20.23	49.29	-4.71	54.00	Average
3	* 5503.800	78.30	20.28	98.58	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	18°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac20 at channel 5500MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

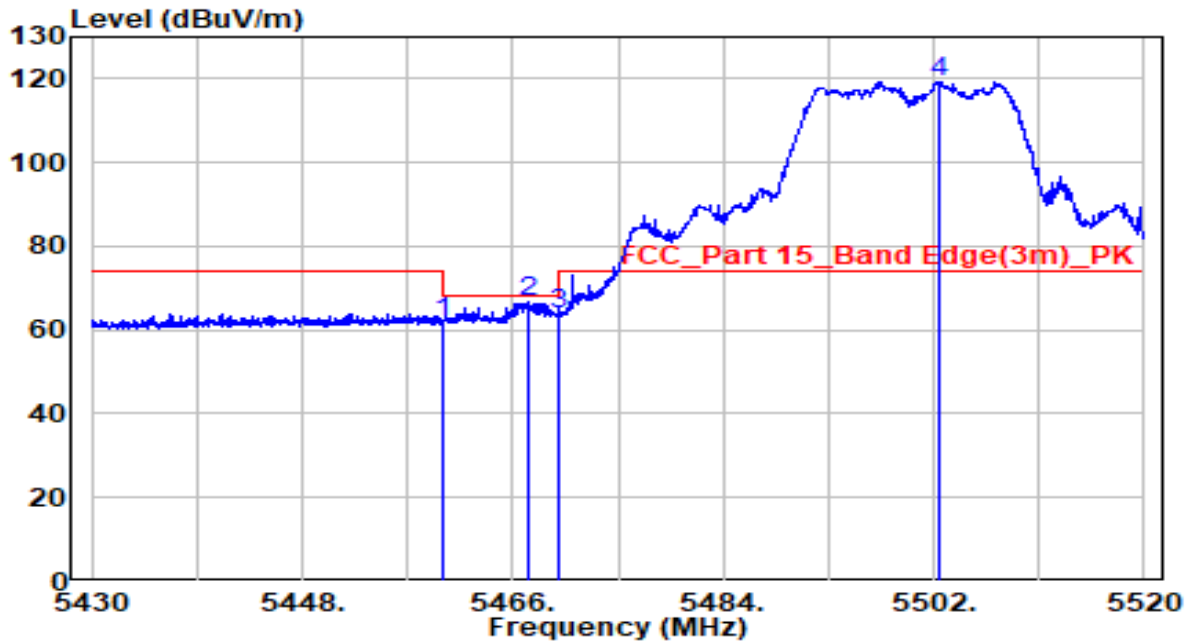


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	41.77	20.23	62.00	-6.20	68.20	Peak
2	5467.350	46.52	20.24	66.76	-1.44	68.20	Peak
3	5470.000	43.66	20.24	63.90	-4.30	68.20	Peak
4	* 5502.540	99.14	20.28	119.42	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	18°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac20 at channel 5500MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

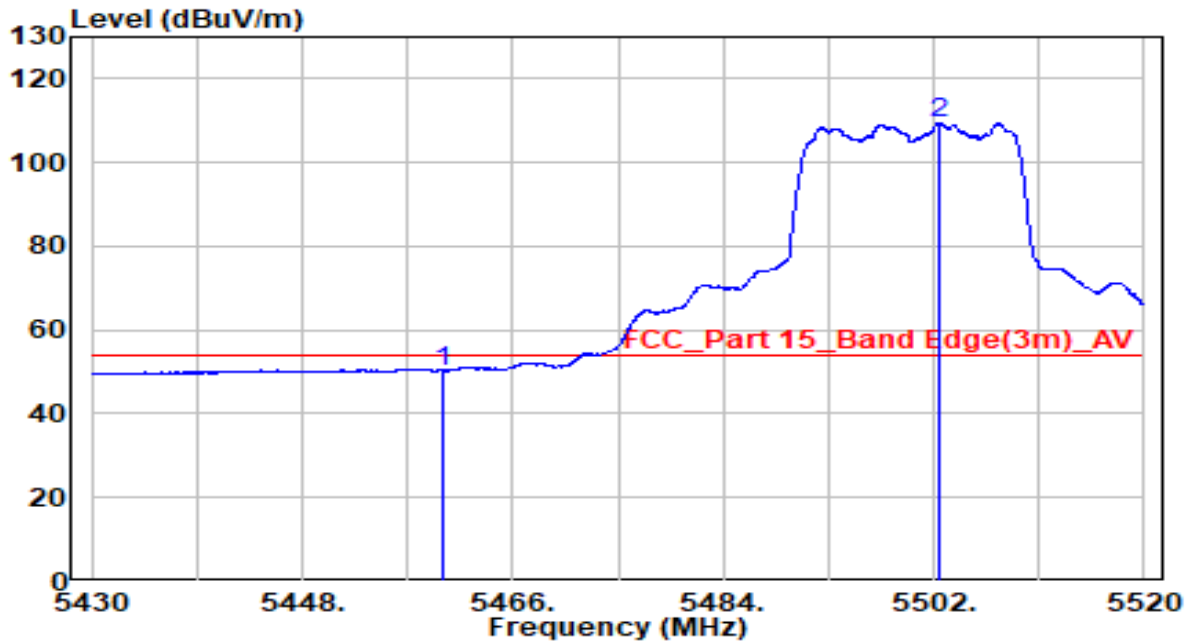


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	30.03	20.23	50.26	-3.74	54.00	Average
2	* 5502.495	89.18	20.28	109.46	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	18°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac20 at channel 5700MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

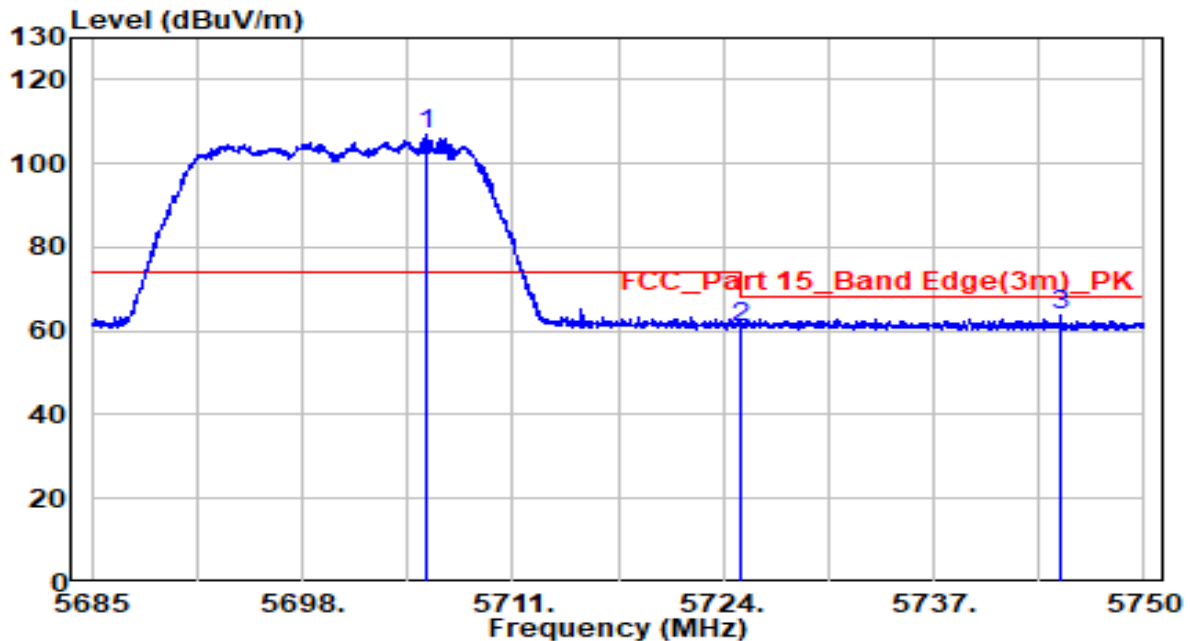


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5705.670	85.91	20.94	106.85	N/A	N/A	Peak
2		5725.000	39.94	21.00	60.94	-7.26	68.20	Peak
3		5744.800	42.47	21.06	63.53	-4.67	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	18°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac20 at channel 5700MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

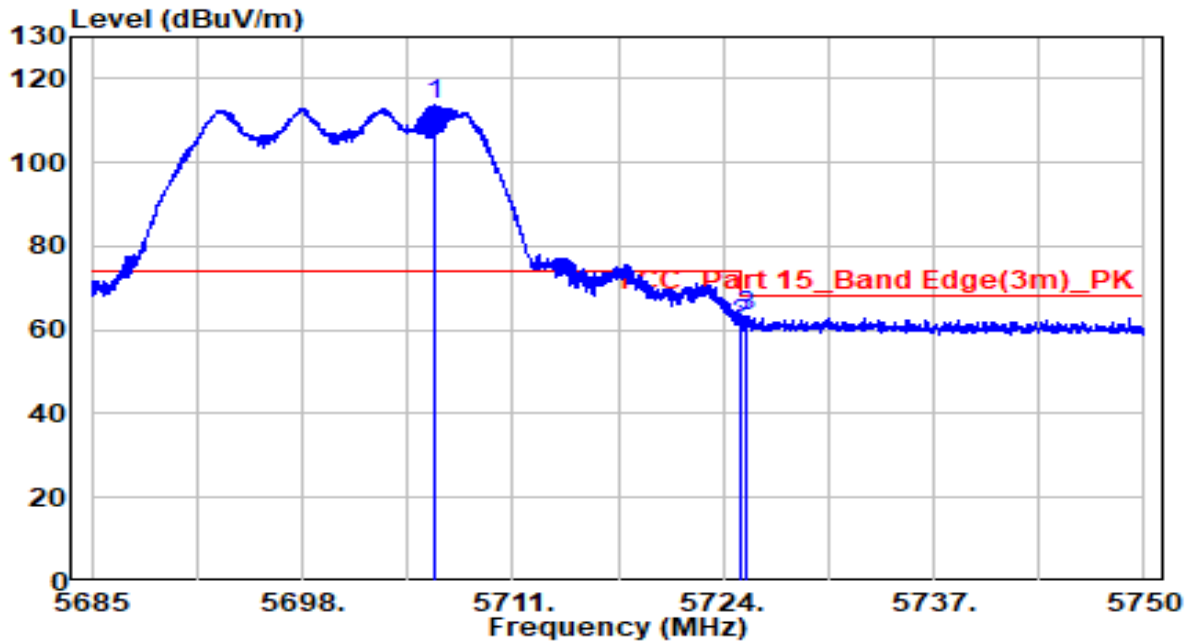


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5706.125	92.66	20.94	113.60	N/A	N/A	Peak
2		5725.000	40.49	21.00	61.49	-6.71	68.20	Peak
3		5725.430	42.22	21.00	63.22	-4.98	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac20 at channel 5745MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

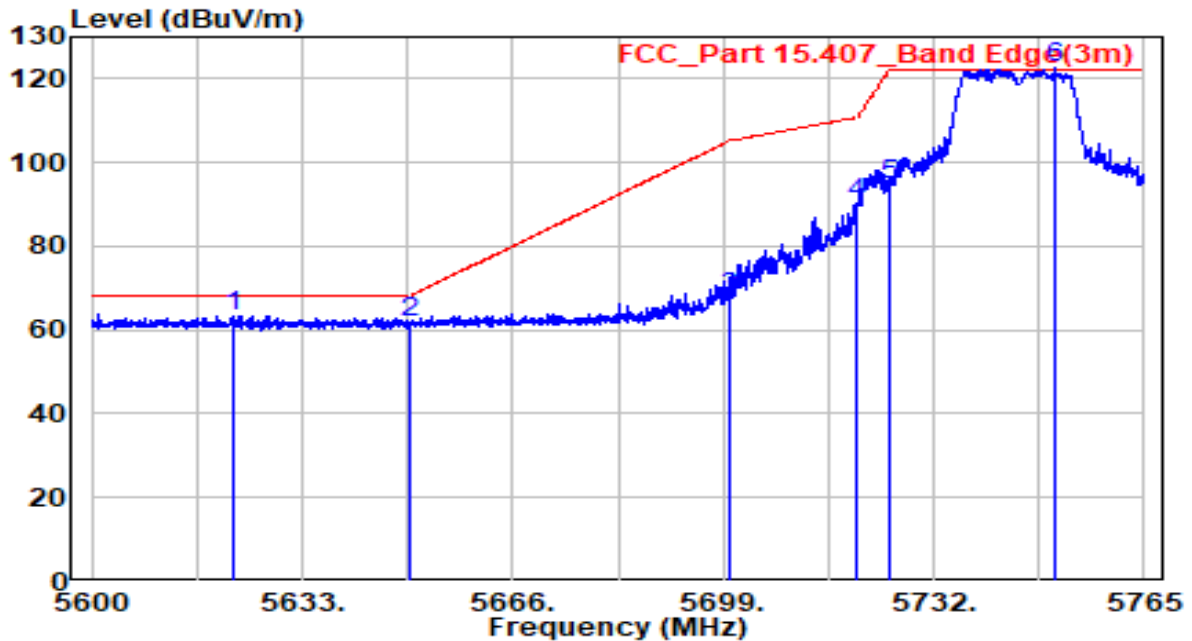


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5622.192	42.77	20.67	63.44	-4.76	68.20	Peak
2	5650.000	41.24	20.76	62.00	-6.20	68.20	Peak
3	5700.000	46.92	20.92	67.84	-37.36	105.20	Peak
4	5720.000	69.19	20.98	90.17	-20.63	110.80	Peak
5	5725.000	73.71	21.00	94.71	-27.49	122.20	Peak
6	* 5751.140	101.39	21.08	122.47	N/A	N/A	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac20 at channel 5745MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

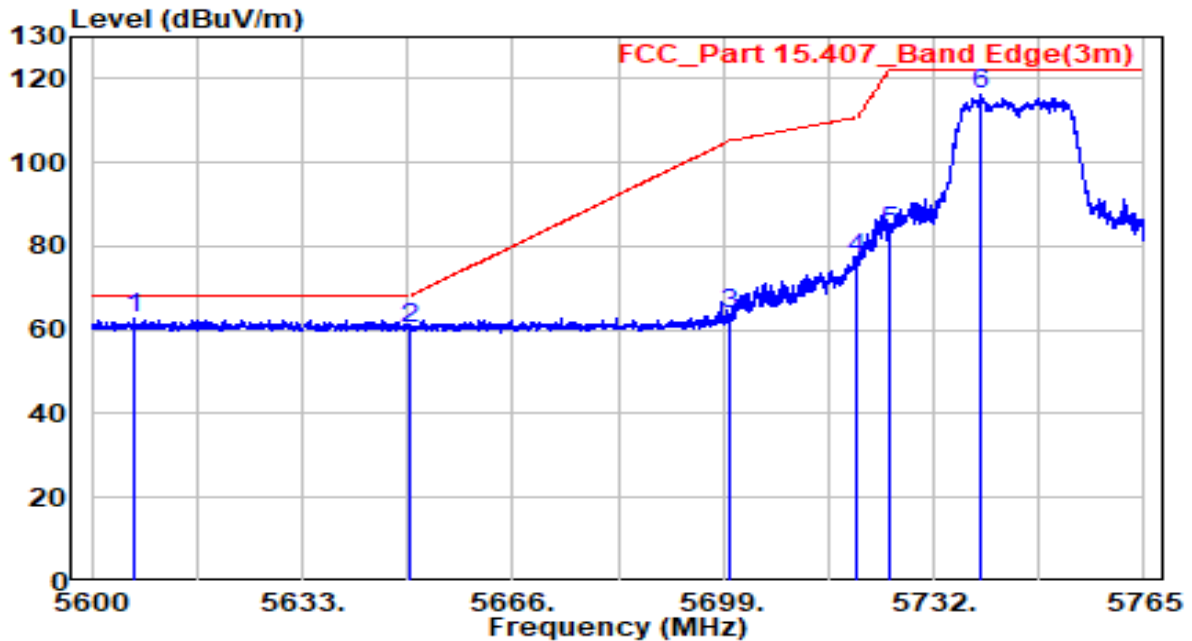


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5606.765	41.95	20.62	62.57	-5.63	68.20	Peak
2		5650.000	39.56	20.76	60.31	-7.89	68.20	Peak
3		5700.000	42.87	20.92	63.79	-41.41	105.20	Peak
4		5720.000	55.91	20.98	76.89	-33.91	110.80	Peak
5		5725.000	62.44	21.00	83.44	-38.76	122.20	Peak
6		5739.507	95.09	21.05	116.14	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac20 at channel 5825MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

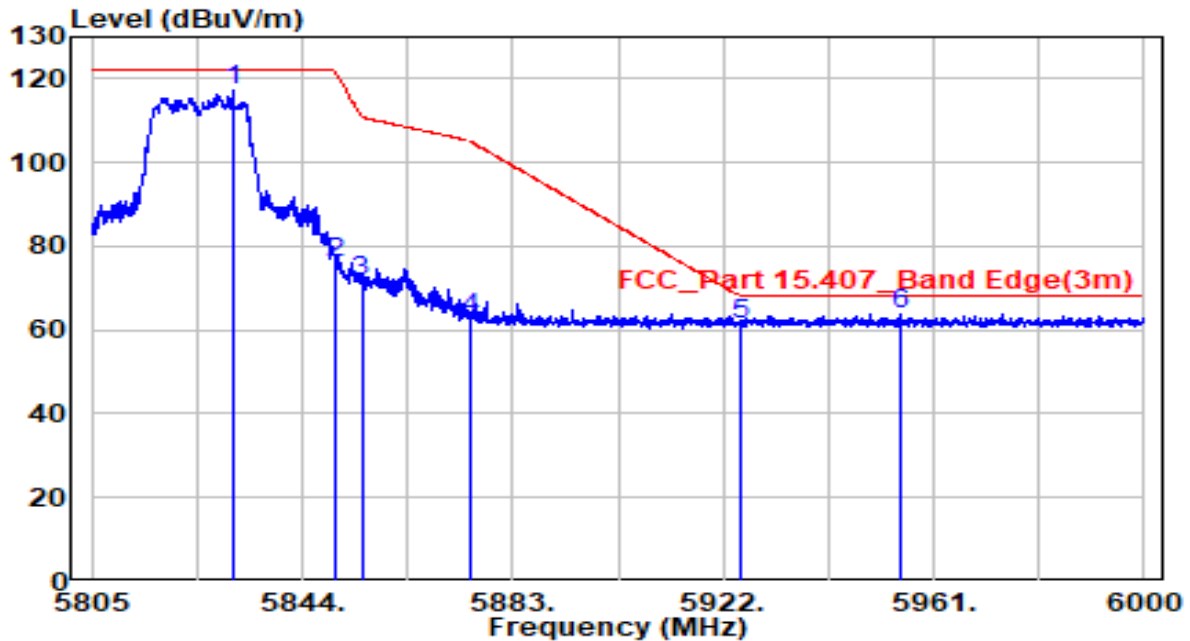


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5831.033	95.68	21.34	117.02	N/A	N/A	Peak
2	5850.000	54.82	21.40	76.22	-45.98	122.20	Peak
3	5855.000	50.33	21.42	71.75	-39.05	110.80	Peak
4	5875.000	41.11	21.49	62.59	-42.61	105.20	Peak
5	5925.000	39.54	21.65	61.19	-7.01	68.20	Peak
6	* 5954.663	41.91	21.74	63.65	-4.55	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac20 at channel 5825MHz (CDD Mode NSS=1)	Test Voltage	120V/60Hz

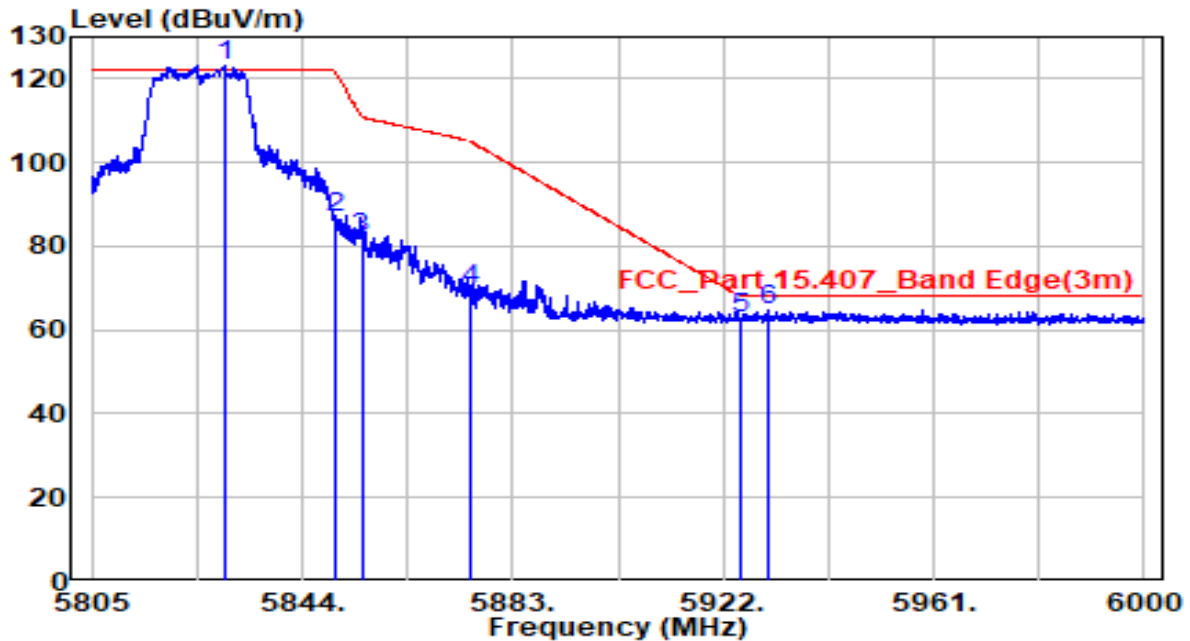


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5829.570	101.73	21.34	123.07	N/A	N/A	Peak
2		5850.000	65.57	21.40	86.97	-35.23	122.20	Peak
3		5855.000	60.55	21.42	81.97	-28.83	110.80	Peak
4		5875.000	48.18	21.49	69.67	-35.53	105.20	Peak
5		5925.000	41.11	21.65	62.76	-5.44	68.20	Peak
6		5930.190	43.31	21.66	64.97	-3.23	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5190MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

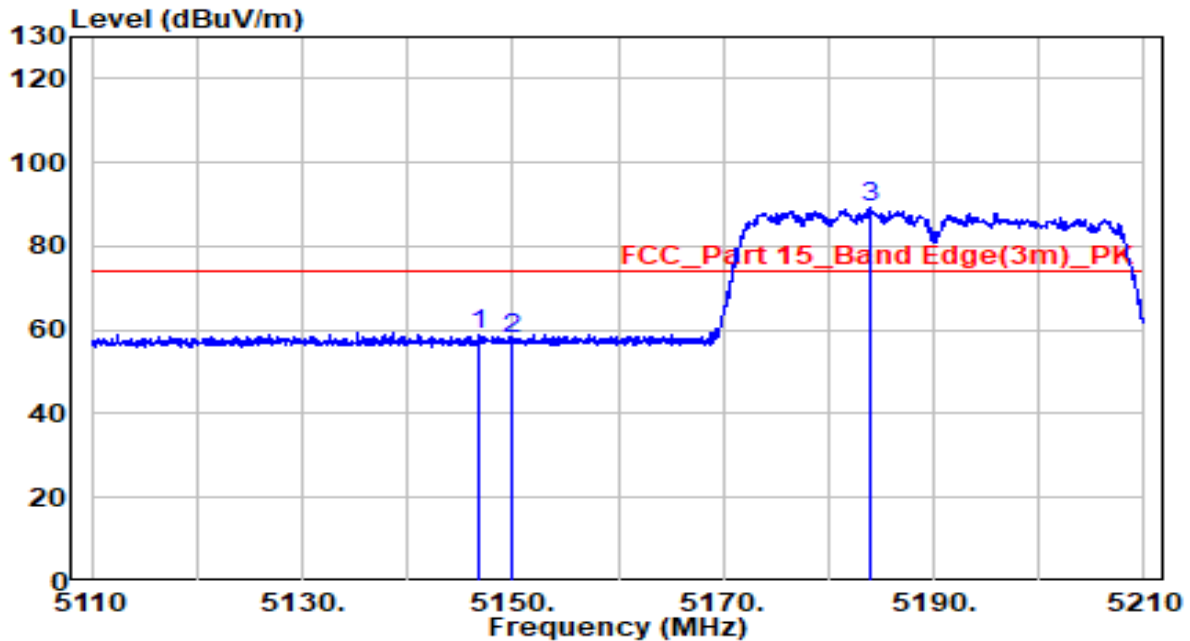


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5146.900	38.88	19.90	58.78	-15.22	74.00	Peak
2	5150.000	38.21	19.91	58.12	-15.88	74.00	Peak
3	* 5183.900	69.24	19.94	89.18	15.18	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5190MHz(CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

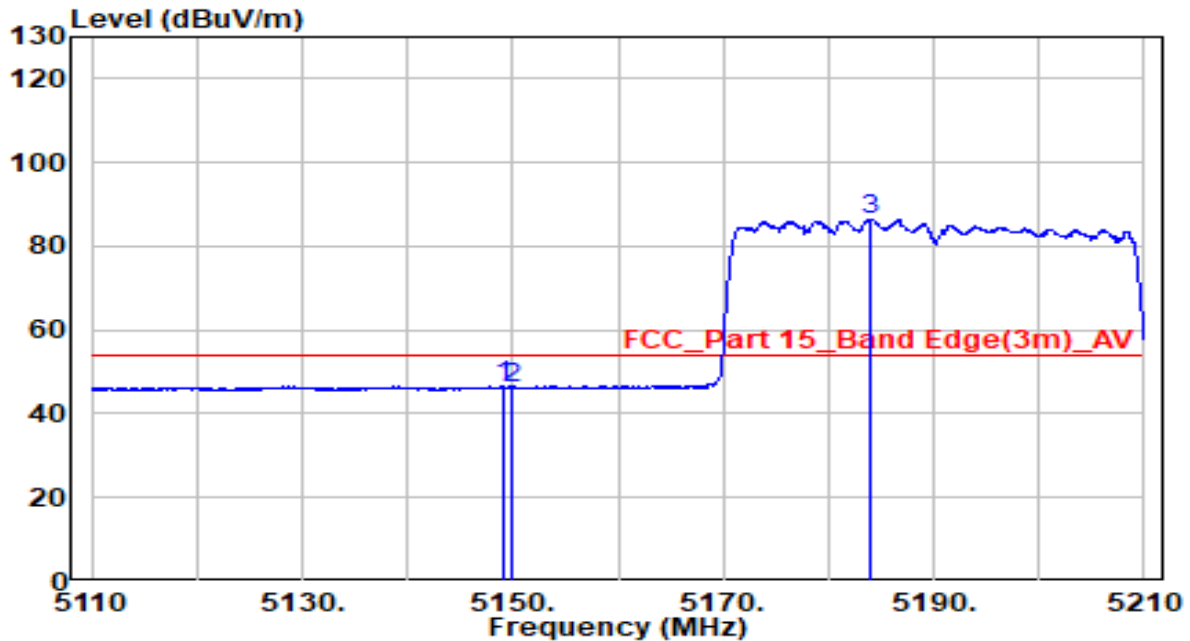


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.100	26.62	19.91	46.52	-7.48	54.00	Average
2	5150.000	26.19	19.91	46.10	-7.90	54.00	Average
3	* 5184.050	66.49	19.94	86.43	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5190MHz(CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

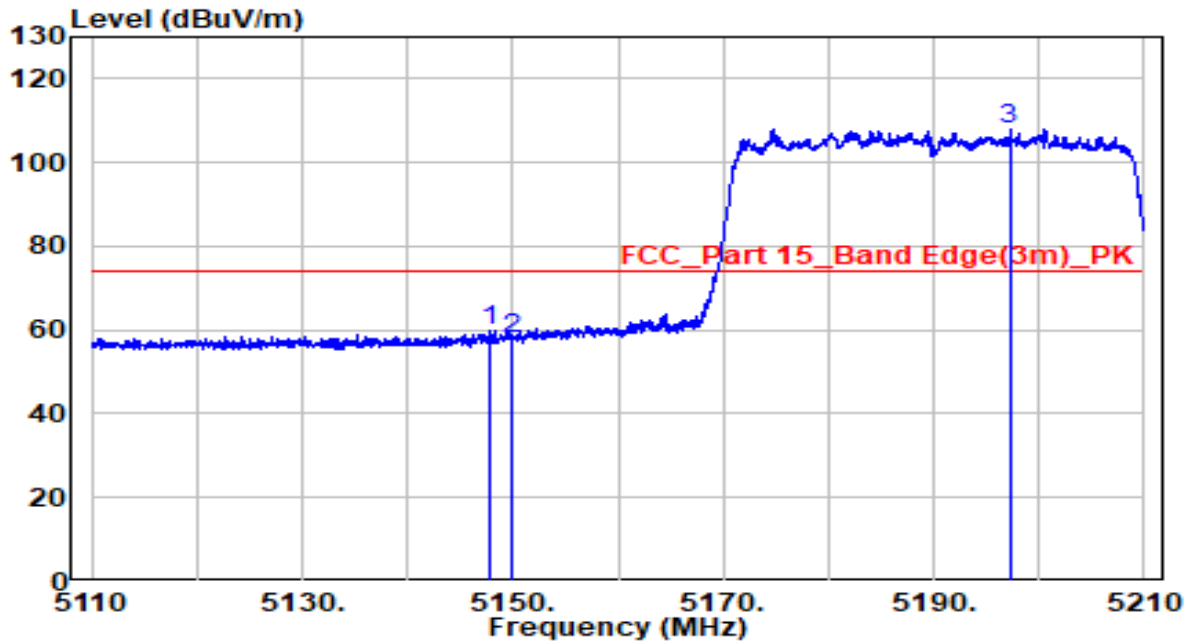


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5147.700	40.11	19.90	60.01	-13.99	74.00	Peak
2	5150.000	37.74	19.91	57.65	-16.35	74.00	Peak
3	* 5197.200	88.03	19.96	107.99	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5190MHz(CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

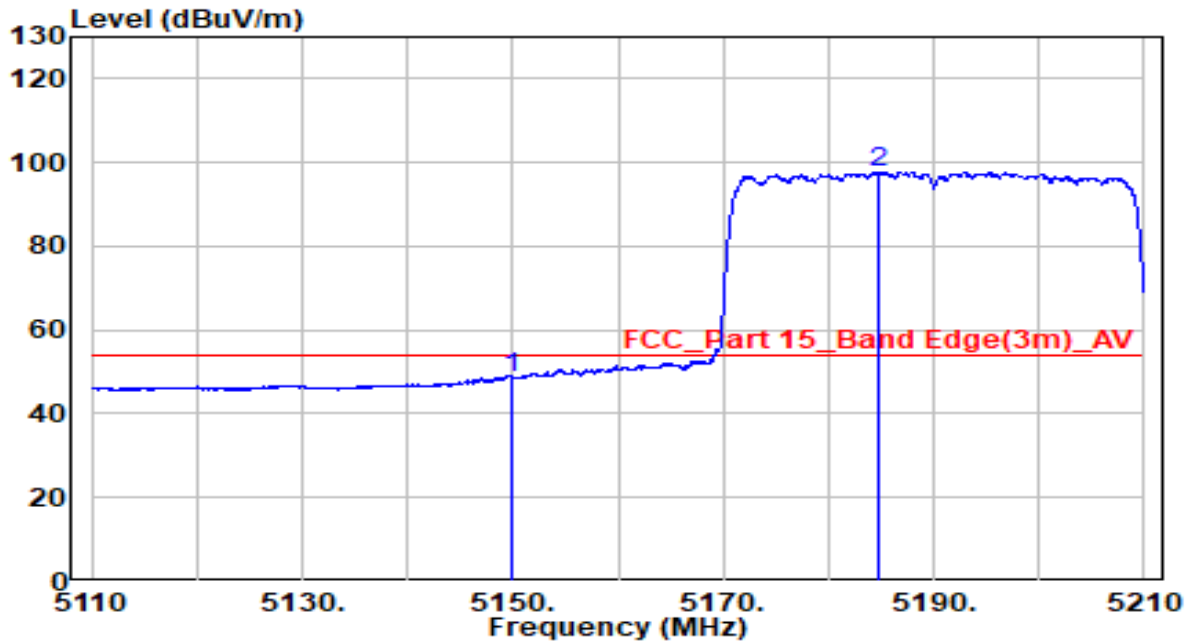


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	28.84	19.91	48.75	-5.25	54.00	Average
2	* 5184.800	77.69	19.94	97.64	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	18°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac40 at channel 5510MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

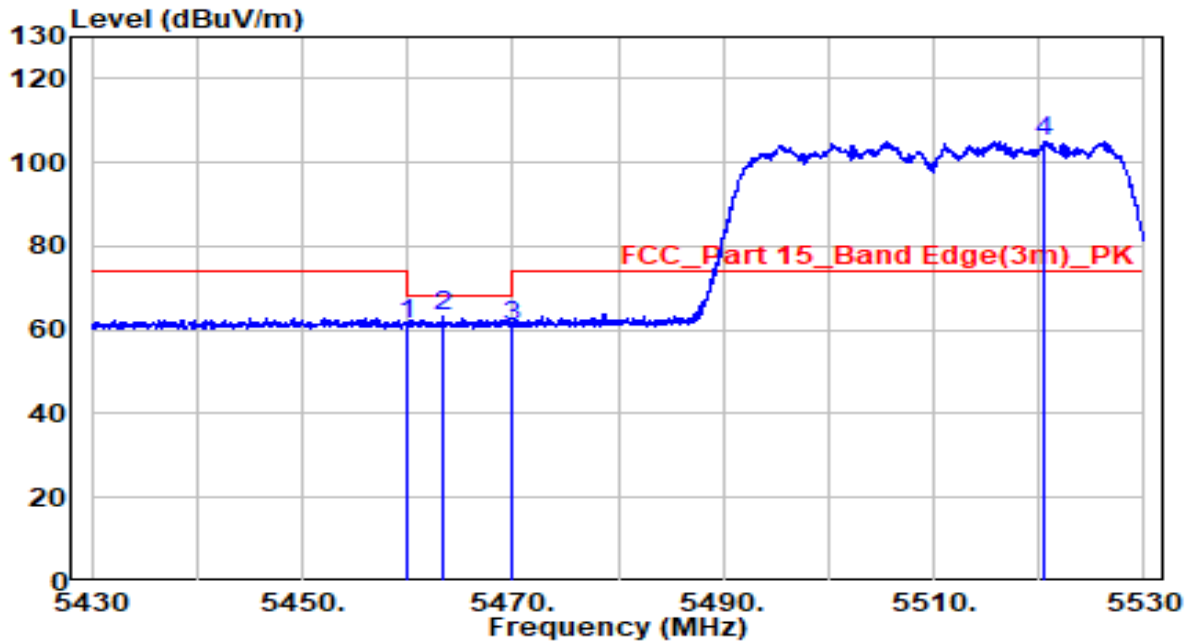


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	40.97	20.23	61.20	-7.00	68.20	Peak
2	5463.350	42.90	20.23	63.13	-5.07	68.20	Peak
3	5470.000	40.74	20.24	60.98	-7.22	68.20	Peak
4	* 5520.500	84.84	20.34	105.18	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	18°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac40 at channel 5510MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

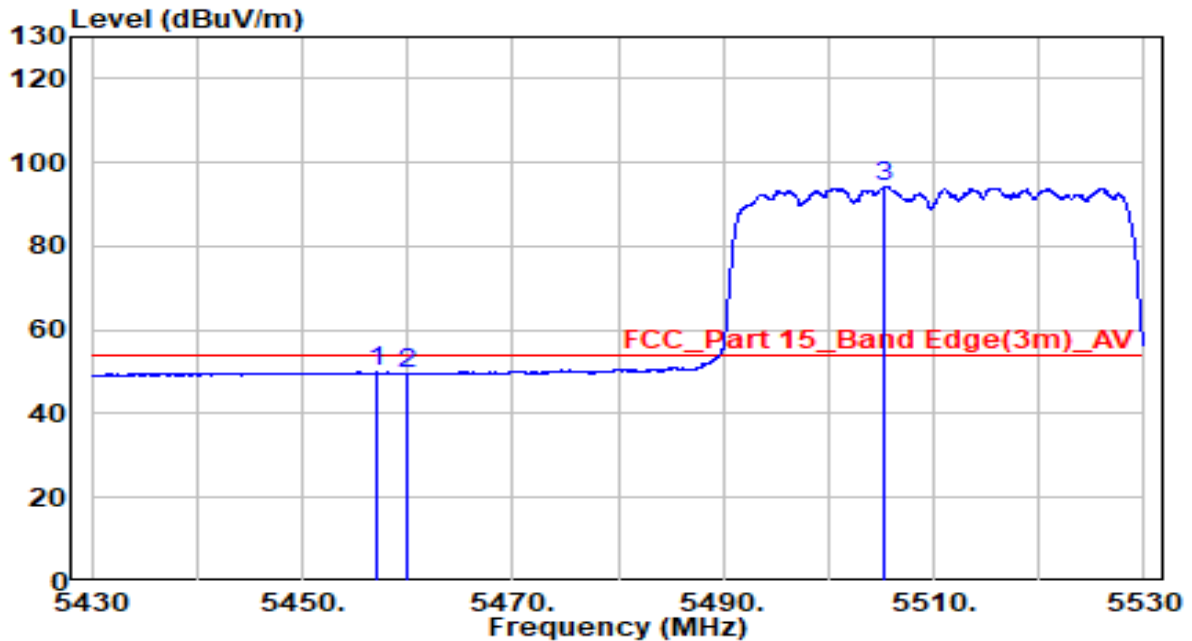


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5457.050	29.65	20.23	49.88	-4.12	54.00	Average
2	5460.000	29.40	20.23	49.63	-4.37	54.00	Average
3	* 5505.400	73.87	20.29	94.16	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	18°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac40 at channel 5510MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

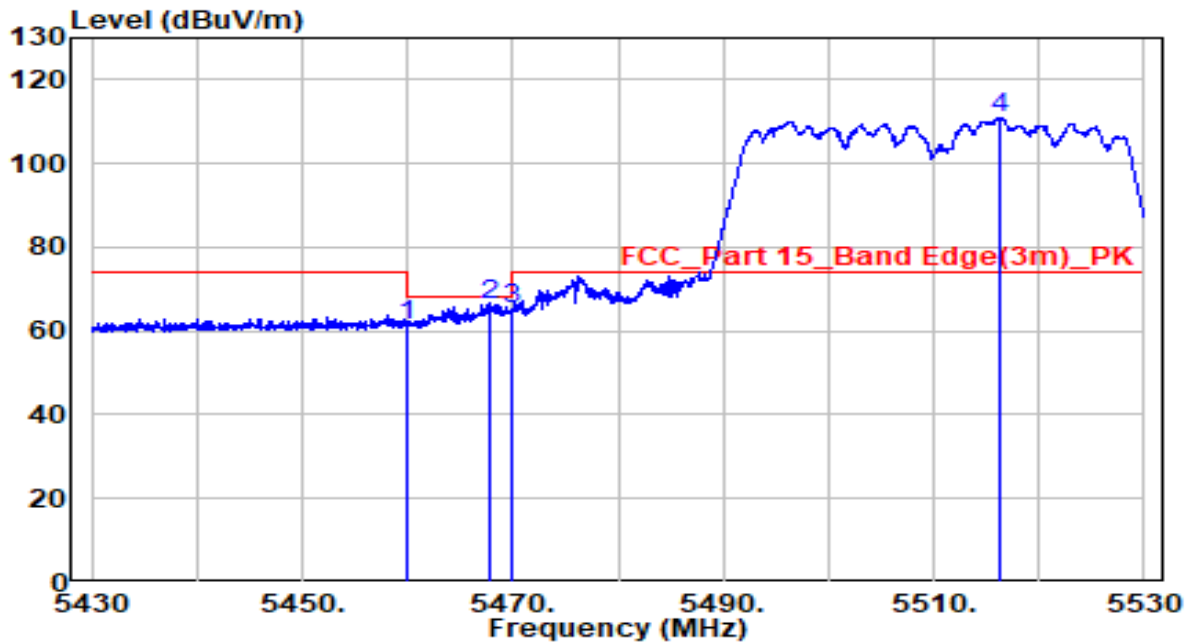


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	41.24	20.23	61.47	-6.73	68.20	Peak
2	5467.900	46.23	20.24	66.47	-1.73	68.20	Peak
3	5470.000	44.84	20.24	65.08	-3.12	68.20	Peak
4	* 5516.350	90.73	20.32	111.05	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	18°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac40 at channel 5510MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

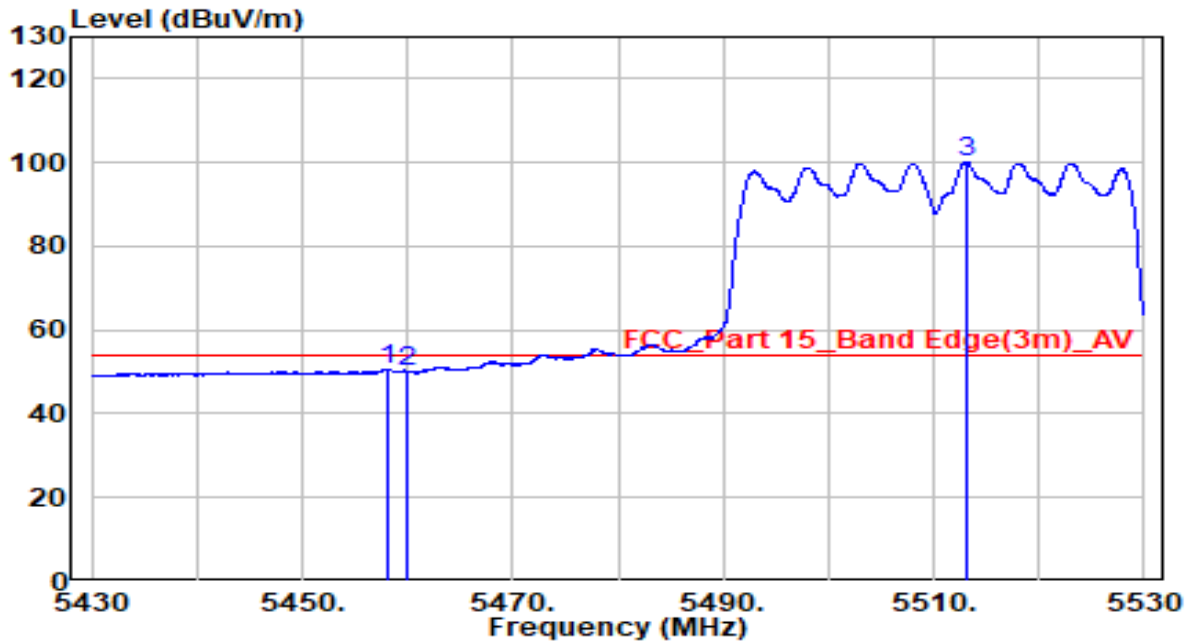


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.100	30.43	20.23	50.66	-3.34	54.00	Average
2	5460.000	29.83	20.23	50.06	-3.94	54.00	Average
3	* 5513.100	79.82	20.31	100.13	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	18°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac40 at channel 5670MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

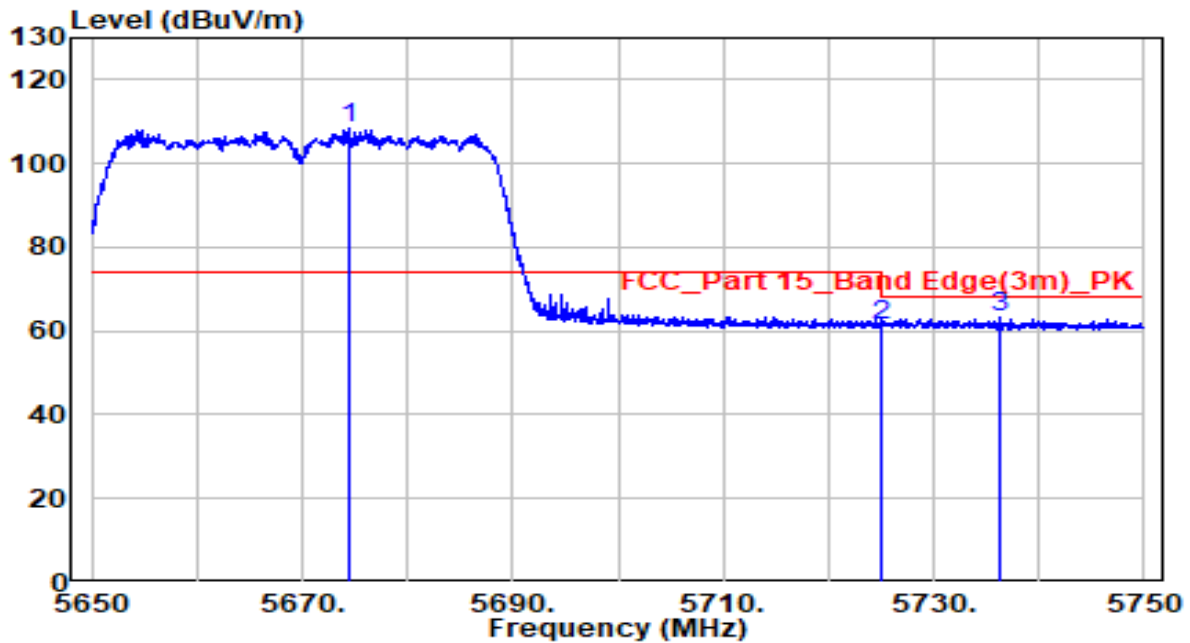


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5674.450	87.76	20.84	108.59	N/A	N/A	Peak
2		5725.000	40.44	21.00	61.43	-6.77	68.20	Peak
3		5736.350	42.04	21.04	63.07	-5.13	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	18°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac40 at channel 5670MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

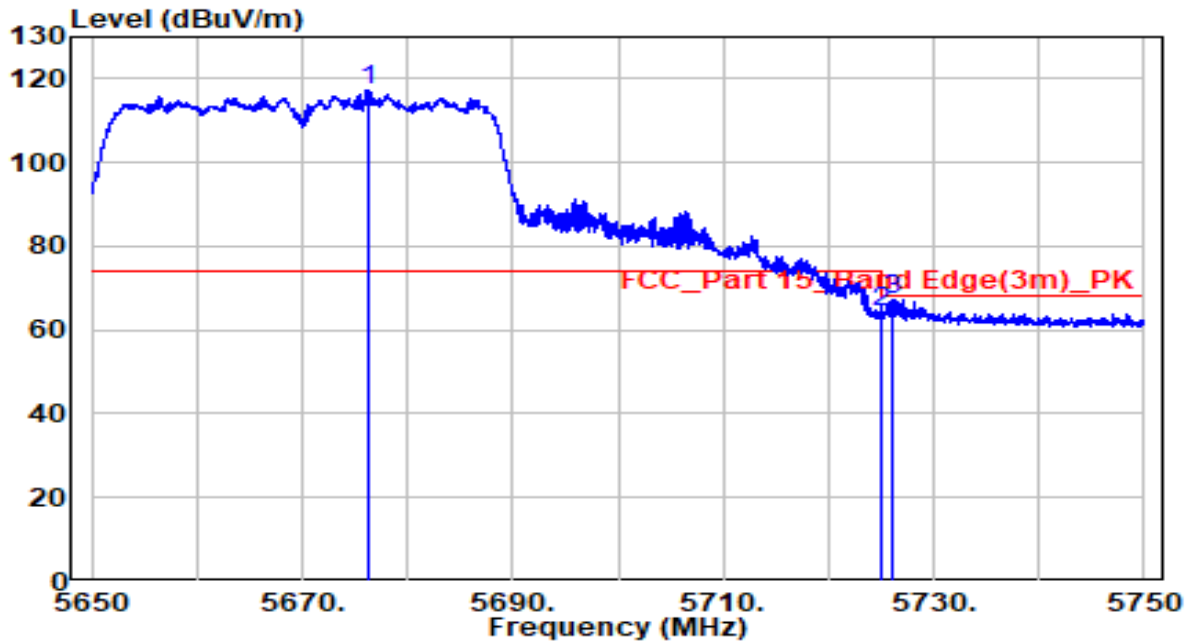


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5676.400	96.50	20.84	117.34	N/A	N/A	Peak
2		5725.000	43.14	21.00	64.14	-4.06	68.20	Peak
3		5726.100	46.31	21.00	67.31	-0.89	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac40 at channel 5755MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

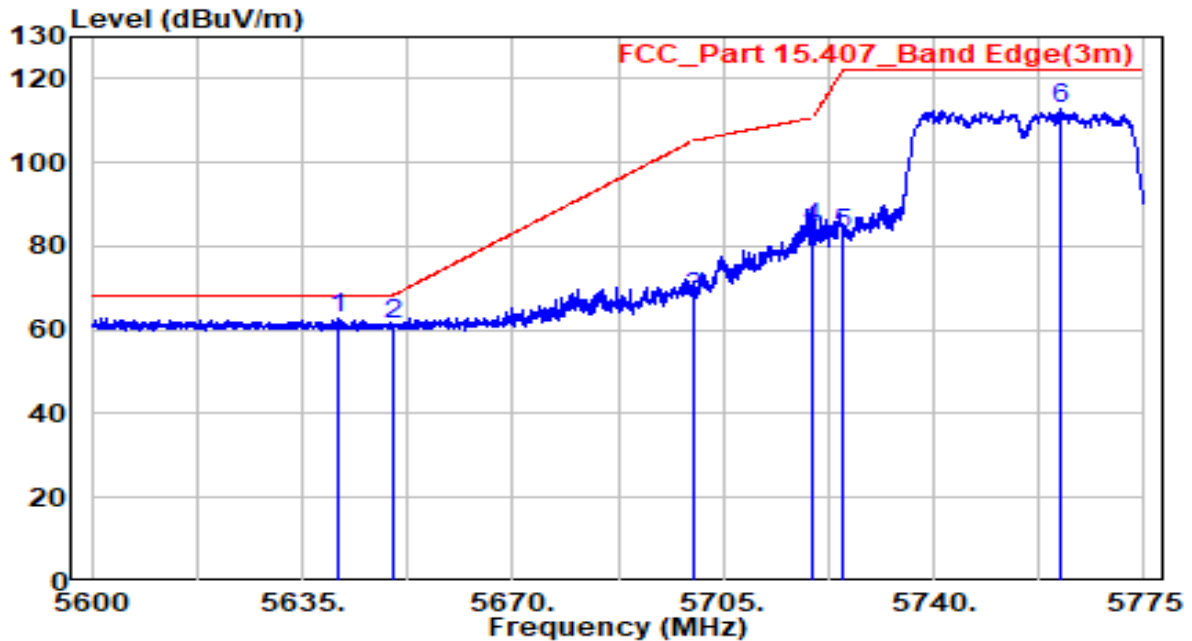


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5640.950	41.82	20.73	62.55	-5.65	68.20	Peak
2		5650.000	40.70	20.76	61.46	-6.74	68.20	Peak
3		5700.000	47.02	20.92	67.94	-37.26	105.20	Peak
4		5720.000	63.43	20.98	84.41	-26.39	110.80	Peak
5		5725.000	61.78	21.00	82.78	-39.42	122.20	Peak
6		5761.000	91.47	21.12	112.59	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac40 at channel 5755MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

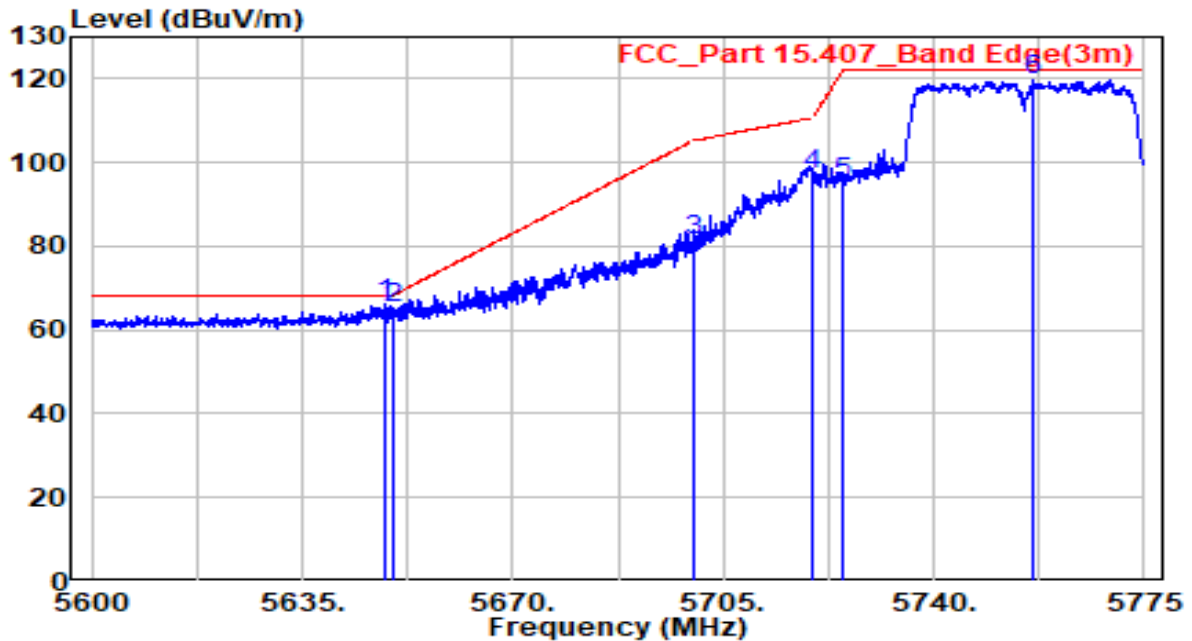


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5648.825	45.36	20.75	66.11	-2.09	68.20	Peak
2		5650.000	44.43	20.76	65.18	-3.02	68.20	Peak
3		5700.000	60.31	20.92	81.22	-23.98	105.20	Peak
4		5720.000	76.18	20.98	97.17	-13.63	110.80	Peak
5		5725.000	74.29	21.00	95.28	-26.92	122.20	Peak
6		5756.625	98.80	21.10	119.90	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac40 at channel 5795MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

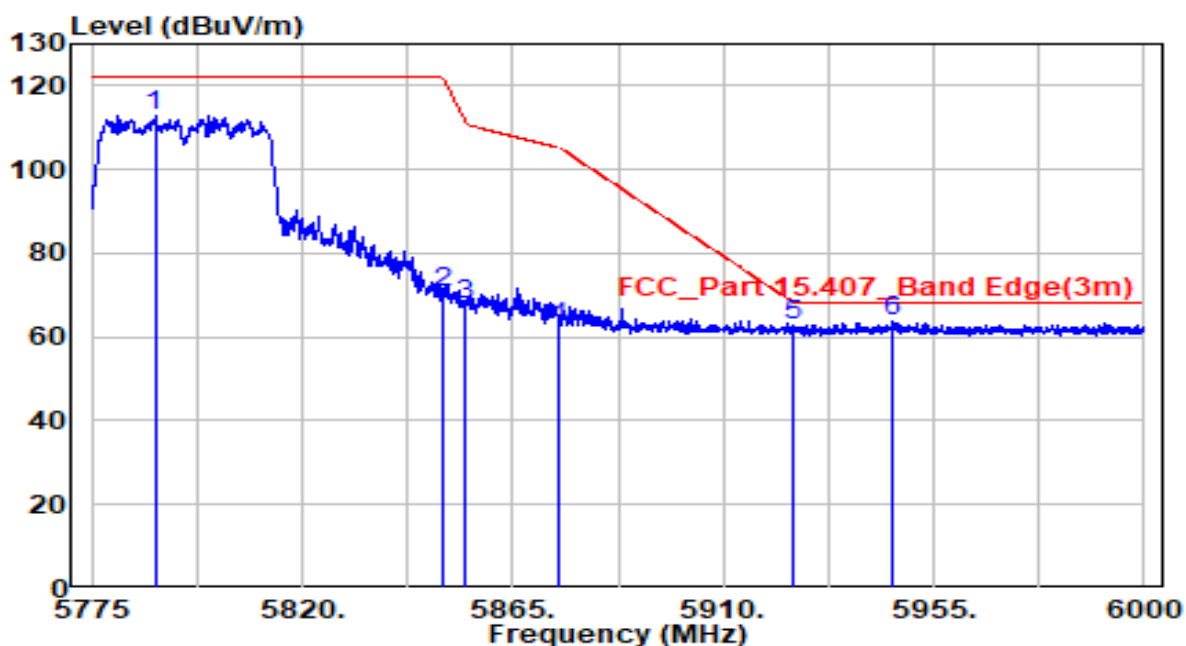


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5788.500	91.87	21.20	113.07	N/A	N/A	Peak
2	5850.000	49.33	21.40	70.73	-51.47	122.20	Peak
3	5855.000	46.04	21.42	67.46	-43.34	110.80	Peak
4	5875.000	41.02	21.49	62.50	-42.70	105.20	Peak
5	5925.000	41.11	21.65	62.76	-5.44	68.20	Peak
6	* 5946.112	42.22	21.72	63.94	-4.26	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac40 at channel 5795MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

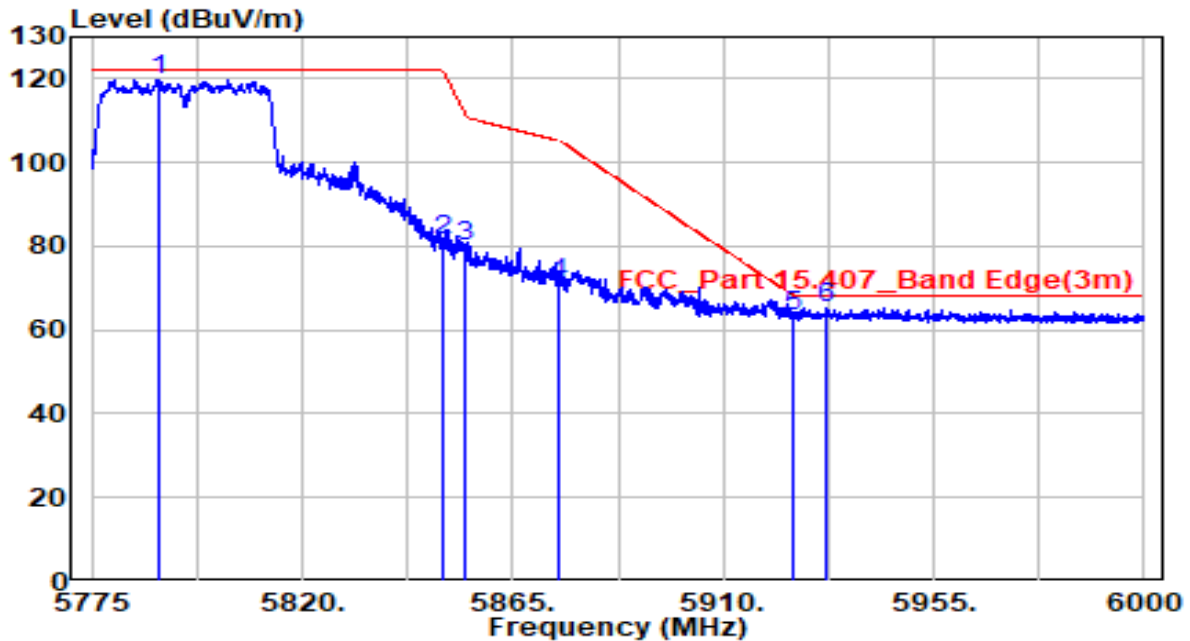


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5789.288	98.70	21.21	119.90	N/A	N/A	Peak
2		5850.000	60.02	21.40	81.43	-40.77	122.20	Peak
3		5855.000	58.35	21.42	79.77	-31.03	110.80	Peak
4		5875.000	49.55	21.49	71.03	-34.17	105.20	Peak
5		5925.000	41.45	21.65	63.10	-5.10	68.20	Peak
6		5931.938	43.43	21.67	65.09	-3.11	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5210MHz(CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

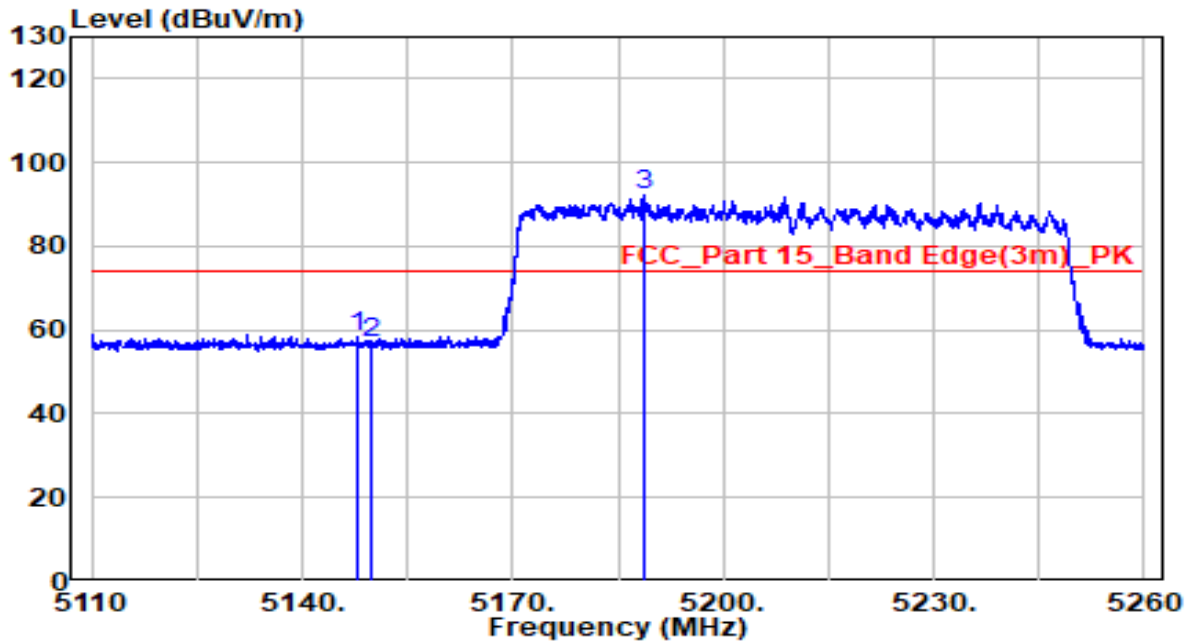


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.025	38.39	19.90	58.30	-15.70	74.00	Peak
2	5150.000	36.78	19.91	56.69	-17.31	74.00	Peak
3	* 5188.600	72.38	19.95	92.32	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5210MHz(CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

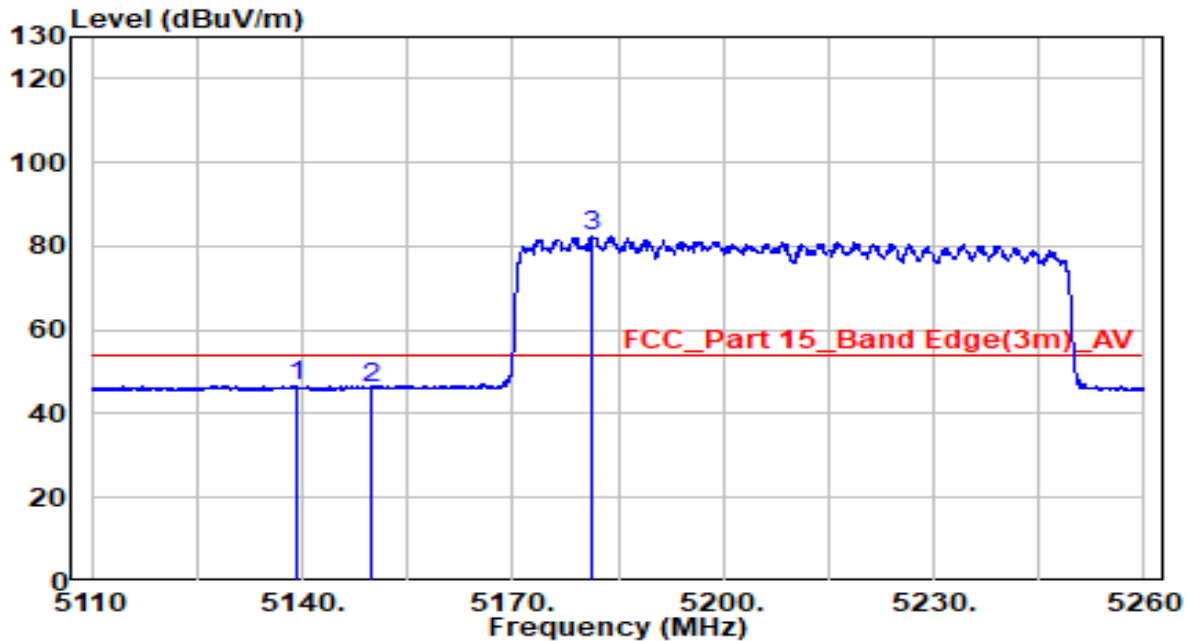


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5139.325	26.66	19.89	46.55	-7.45	54.00	Average
2	5150.000	26.42	19.91	46.33	-7.67	54.00	Average
3	* 5181.250	62.59	19.94	82.53	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5210MHz(CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

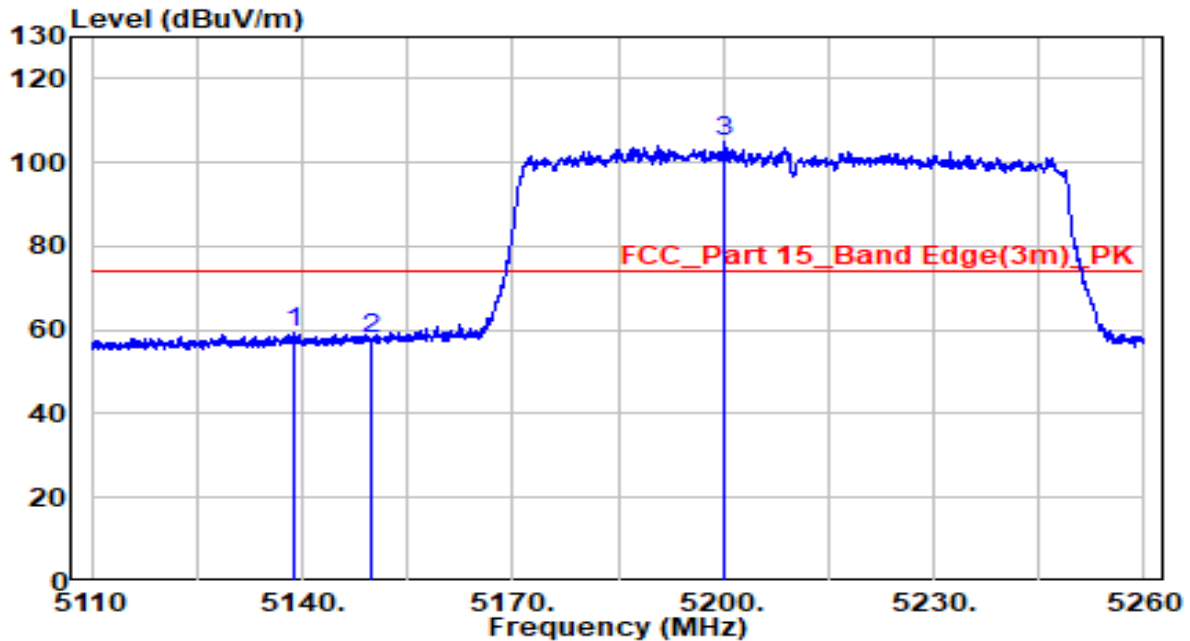


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5138.800	39.41	19.89	59.31	-14.69	74.00	Peak
2	5150.000	38.22	19.91	58.12	-15.88	74.00	Peak
3	* 5200.225	85.17	19.96	105.13	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5210MHz(CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

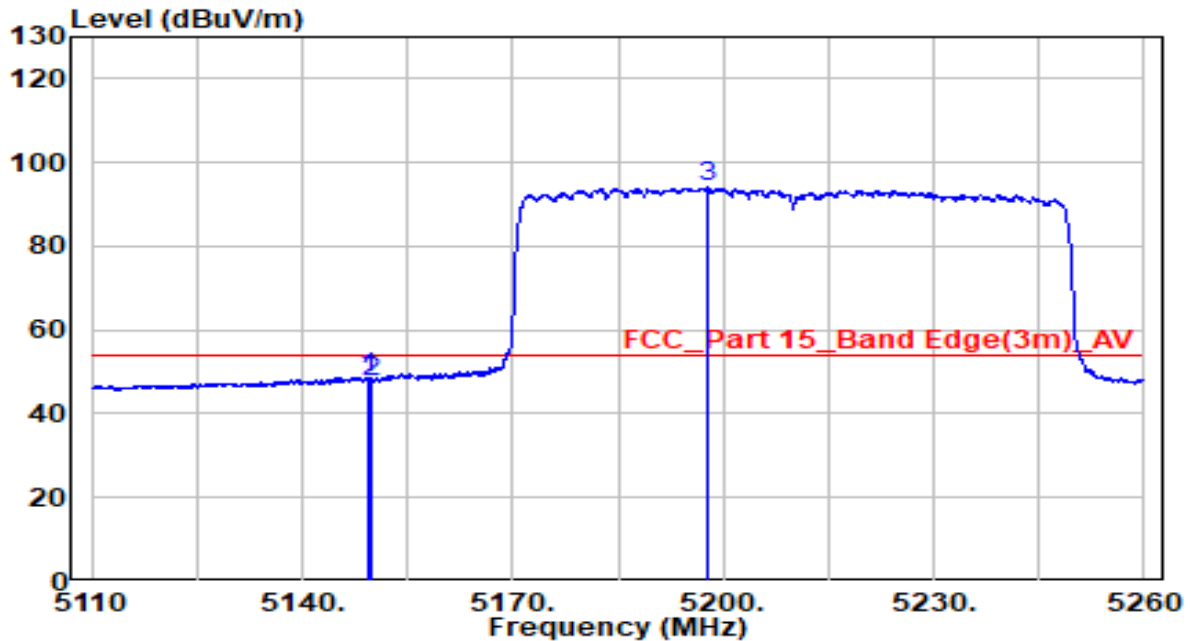


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.525	28.90	19.91	48.81	-5.19	54.00	Average
2	5150.000	27.76	19.91	47.67	-6.33	54.00	Average
3	* 5197.675	74.06	19.96	94.02	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5530MHz(CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

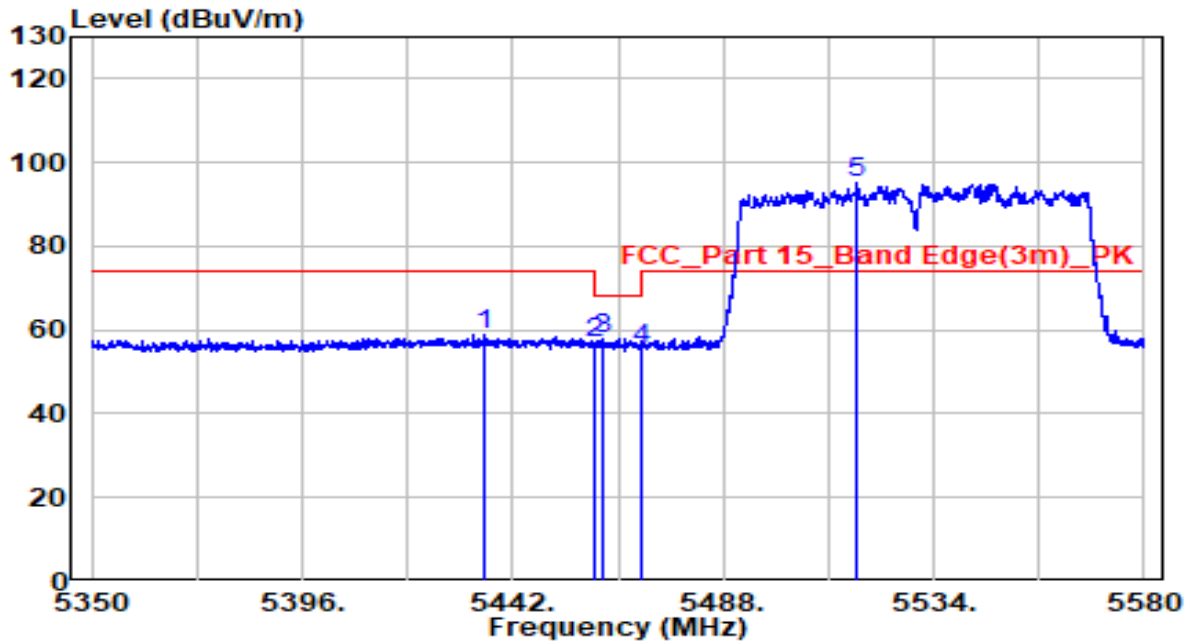


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5436.020	38.63	20.20	58.83	-15.17	74.00	Peak
2	5460.000	36.70	20.23	56.93	-11.27	68.20	Peak
3	5461.435	37.44	20.23	57.67	-10.53	68.20	Peak
4	5470.000	35.29	20.24	55.53	-12.67	68.20	Peak
5	* 5517.325	74.63	20.33	94.96	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5530MHz(CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

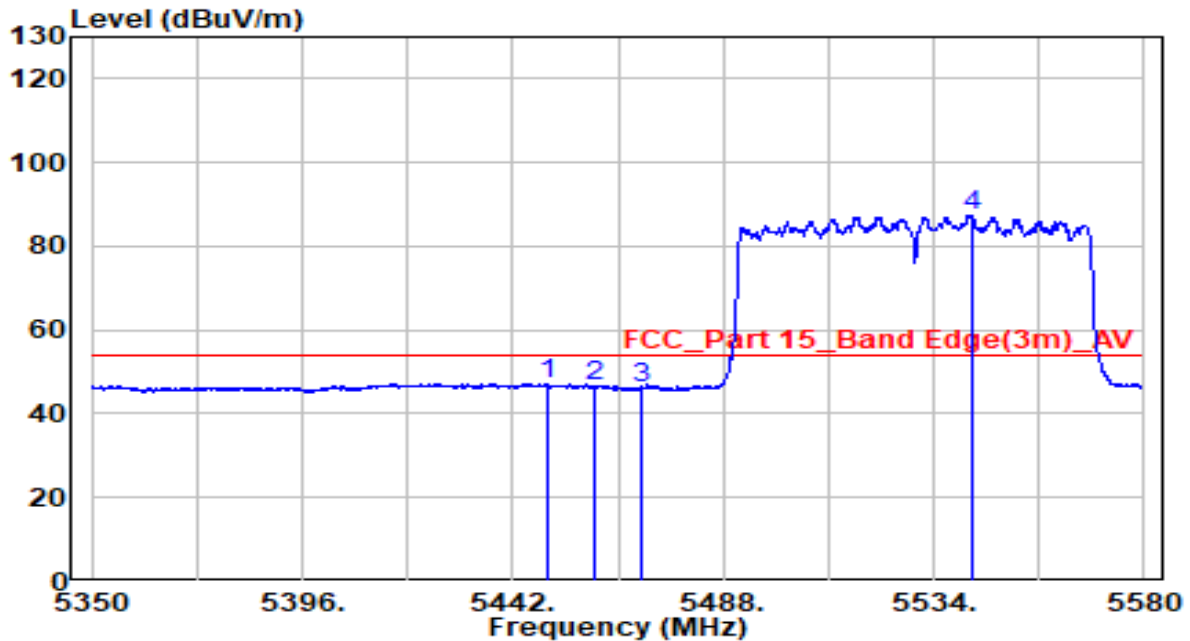


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5449.590	27.01	20.22	47.22	-6.78	54.00	Average
2	5460.000	26.15	20.23	46.37	-7.63	54.00	Average
3	5470.000	25.88	20.24	46.12	-7.88	54.00	Average
4	* 5542.280	67.14	20.41	87.55	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5530MHz(CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

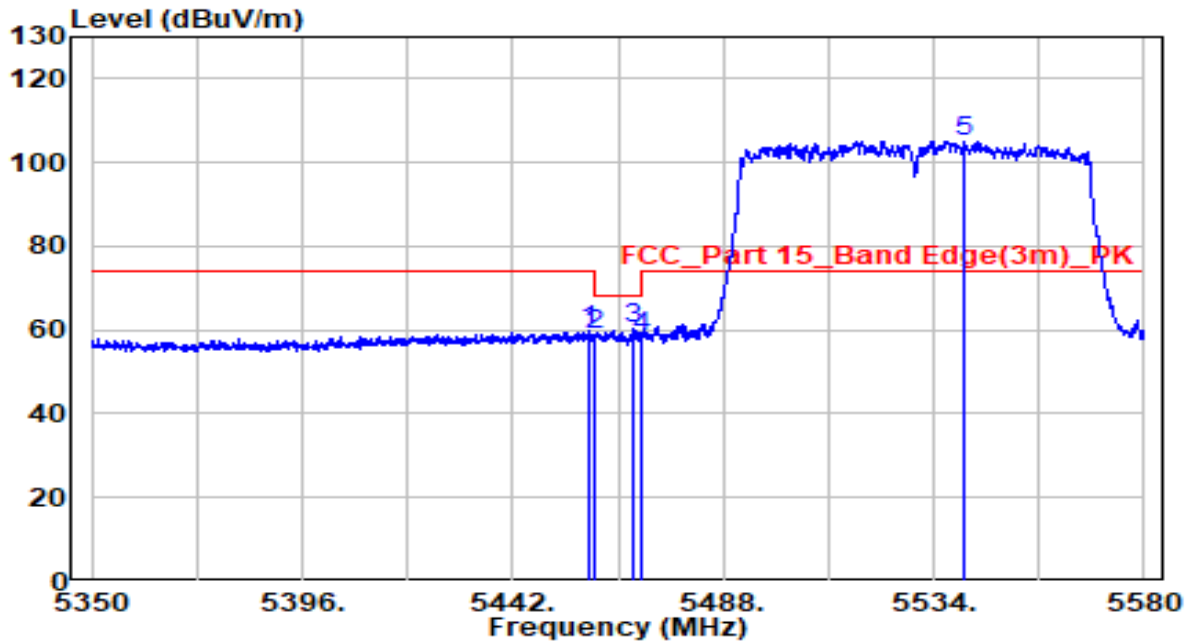


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.905	39.65	20.23	59.88	-14.12	74.00	Peak
2	5460.000	38.57	20.23	58.80	-9.40	68.20	Peak
3	5468.450	39.97	20.24	60.21	-7.99	68.20	Peak
4	5470.000	38.30	20.24	58.54	-9.66	68.20	Peak
5	* 5540.555	84.78	20.40	105.18	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5530MHz(CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

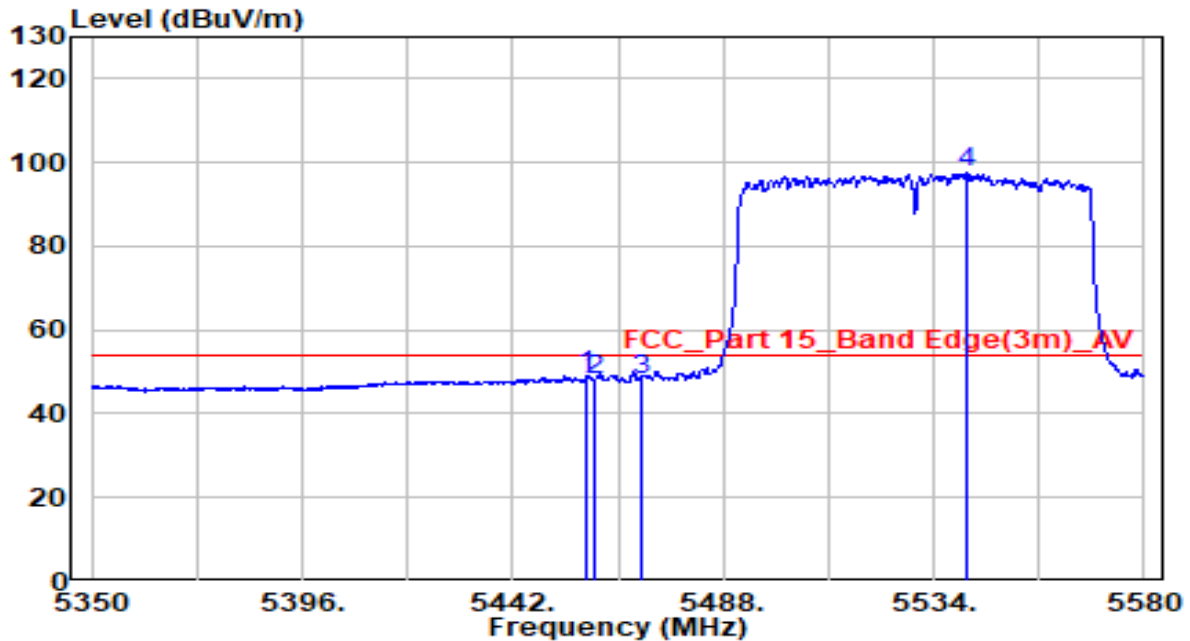


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.330	28.92	20.23	49.15	-4.85	54.00	Average
2	5460.000	28.03	20.23	48.26	-5.74	54.00	Average
3	5470.000	27.85	20.24	48.09	-5.91	54.00	Average
4	* 5541.245	77.08	20.40	97.49	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	18°C/54%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac80 at channel 5610MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

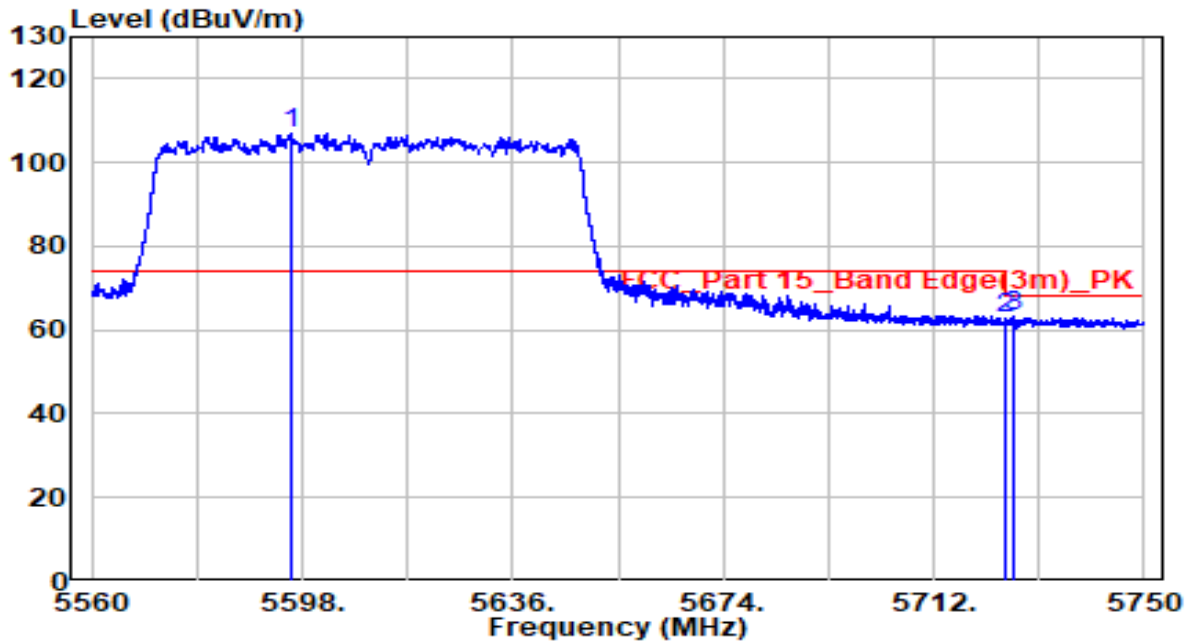


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5595.815	86.36	20.58	106.94	N/A	N/A	Peak
2		5725.000	41.97	21.00	62.97	-5.23	68.20	Peak
3		5726.535	42.38	21.00	63.39	-4.81	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	18°C/54%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac80 at channel 5610MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

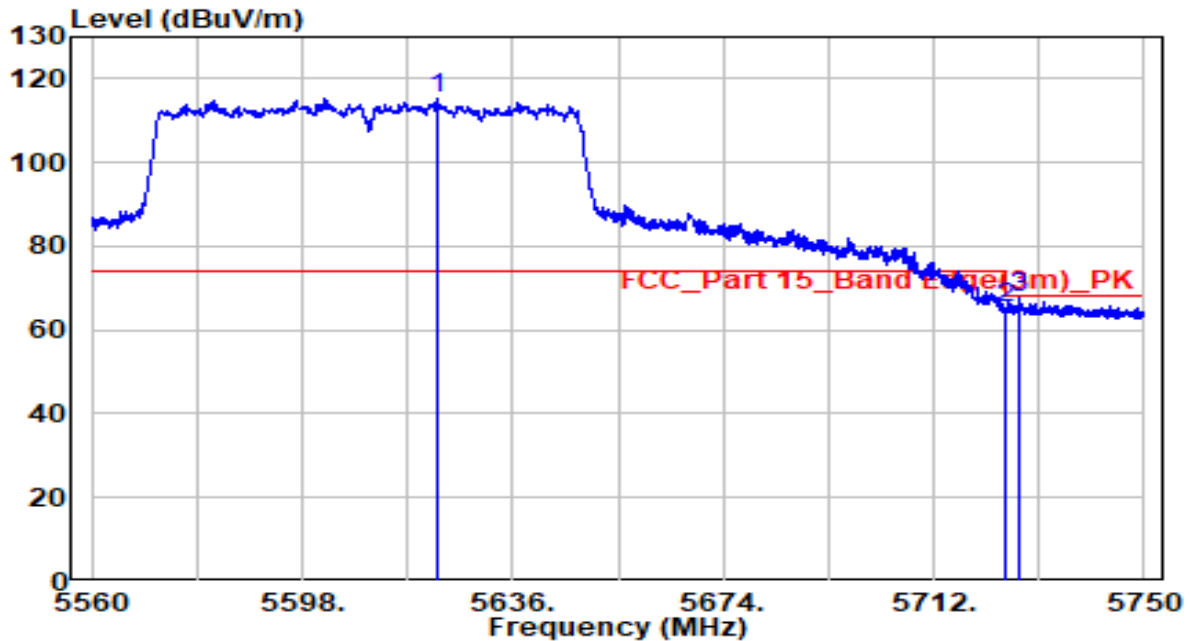


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5622.225	94.49	20.67	115.16	N/A	N/A	Peak
2		5725.000	44.17	21.00	65.17	-3.03	68.20	Peak
3		5727.580	46.48	21.01	67.49	-0.71	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac80 at channel 5775MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

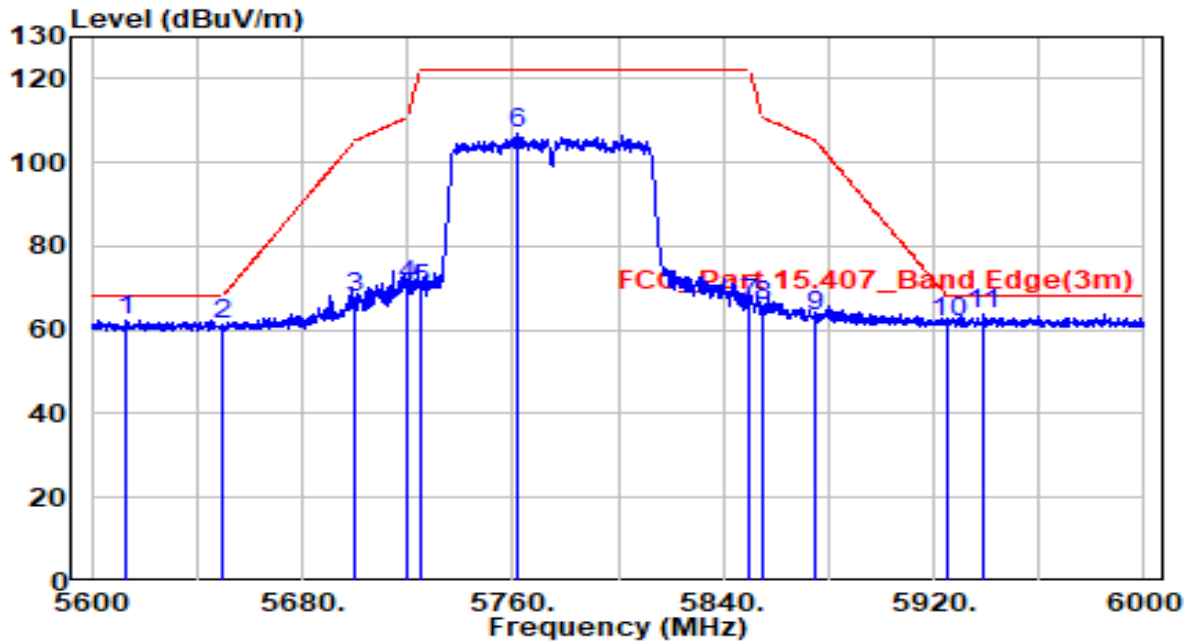

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5613.400	41.86	20.64	62.49	-5.71	68.20	Peak
2	5650.000	40.57	20.76	61.33	-6.87	68.20	Peak
3	5700.000	46.85	20.92	67.77	-37.43	105.20	Peak
4	5720.000	49.73	20.98	70.71	-40.09	110.80	Peak
5	5725.000	48.54	21.00	69.54	-52.66	122.20	Peak
6	5762.000	86.03	21.12	107.15	N/A	N/A	Peak
7	5850.000	44.72	21.40	66.13	-56.07	122.20	Peak
8	5855.000	44.07	21.42	65.49	-45.31	110.80	Peak
9	5875.000	41.87	21.49	63.35	-41.85	105.20	Peak
10	5925.000	40.36	21.65	62.01	-6.19	68.20	Peak
11	* 5938.800	42.05	21.69	63.75	-4.45	68.20	Peak

Note:


1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).

3. $\text{Measurement(dBuV/m)} = \text{Reading(dBuV)} + \text{C.F (Correction Factor)}$.

4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac80 at channel 5775MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

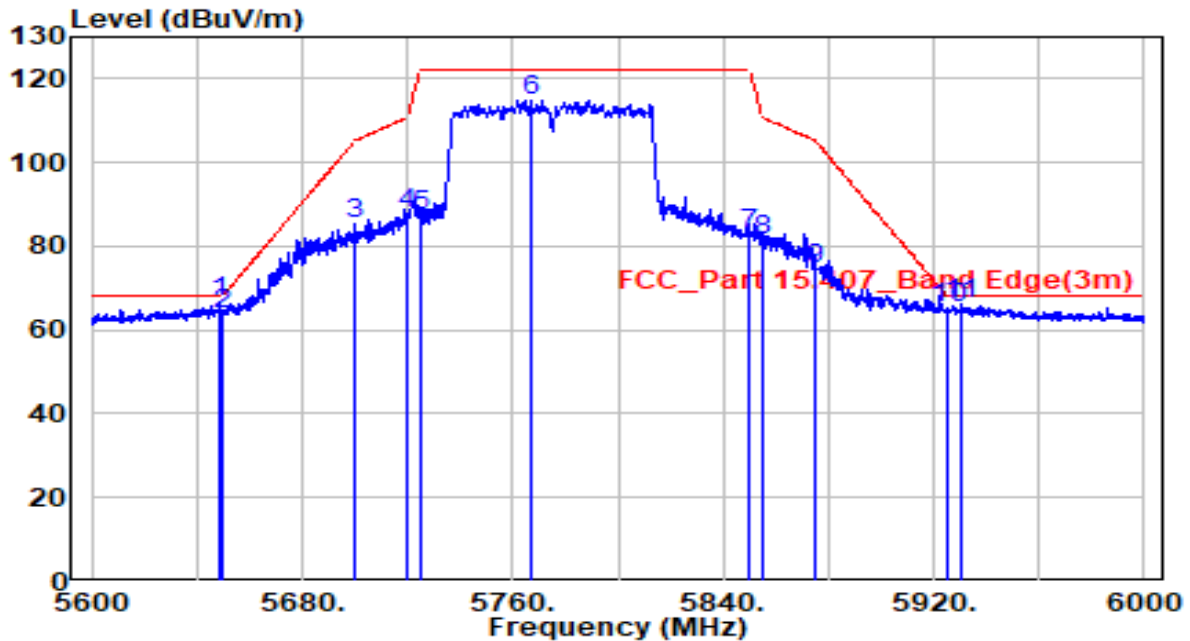

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5649.000	46.01	20.75	66.76	-1.44	68.20	Peak
2		5650.000	43.04	20.76	63.80	-4.40	68.20	Peak
3		5700.000	64.26	20.92	85.18	-20.02	105.20	Peak
4		5720.000	67.06	20.98	88.04	-22.76	110.80	Peak
5		5725.000	66.43	21.00	87.43	-34.77	122.20	Peak
6		5767.400	93.82	21.14	114.96	N/A	N/A	Peak
7		5850.000	61.40	21.40	82.80	-39.40	122.20	Peak
8		5855.000	59.80	21.42	81.22	-29.58	110.80	Peak
9		5875.000	52.93	21.49	74.42	-30.78	105.20	Peak
10		5925.000	43.51	21.65	65.16	-3.04	68.20	Peak
11		5930.400	44.42	21.66	66.08	-2.12	68.20	Peak

Note:


1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).

3. $\text{Measurement(dBuV/m)} = \text{Reading(dBuV)} + \text{C.F (Correction Factor)}$.

4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/29.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac160 at channel 5570MHz(CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

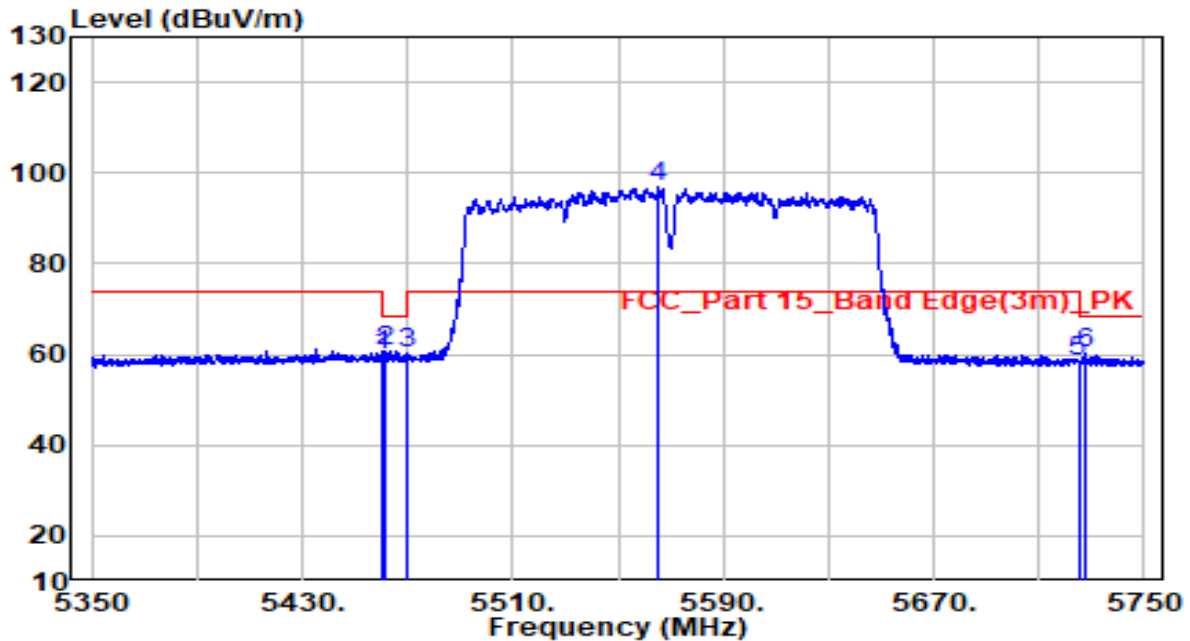


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	39.49	20.23	59.72	-8.48	68.20	Peak
2	5461.800	40.58	20.23	60.81	-7.39	68.20	Peak
3	5470.000	39.98	20.24	60.22	-7.98	68.20	Peak
4 *	5565.600	76.24	20.48	96.72	N/A	N/A	Peak
5	5725.000	37.24	21.00	58.24	-9.96	68.20	Peak
6	5727.400	39.34	21.01	60.35	-7.85	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/29.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac160 at channel 5570MHz(CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

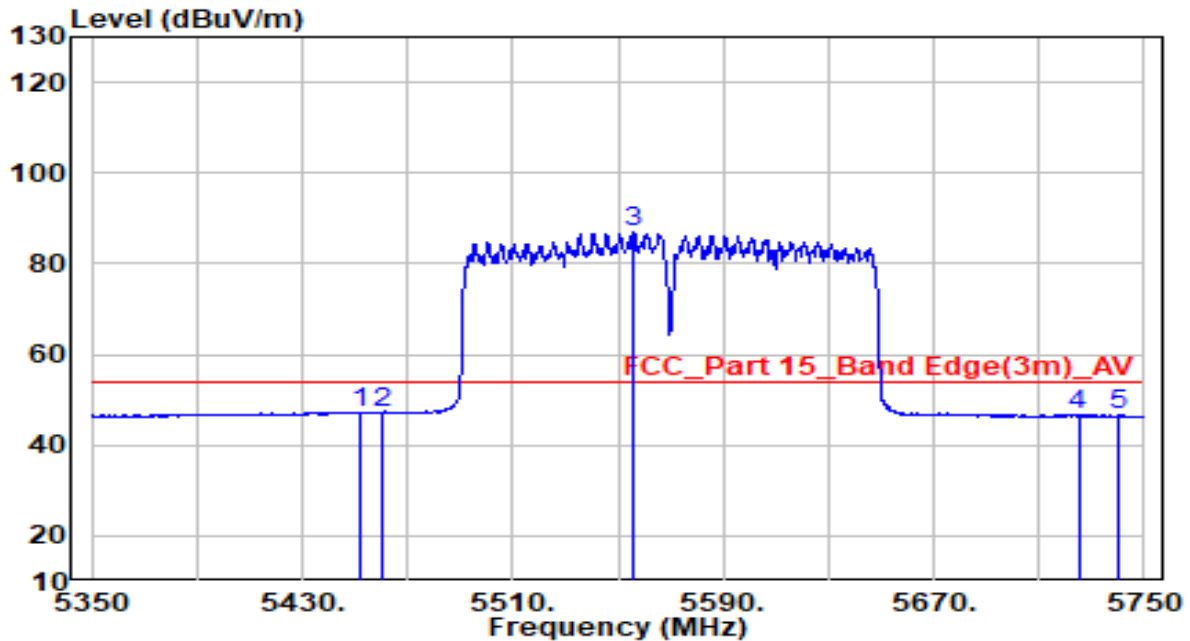


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5452.400	27.13	20.22	47.35	-6.65	54.00	Average
2	5460.000	26.88	20.23	47.11	-6.89	54.00	Average
3	* 5555.600	66.64	20.45	87.09	N/A	N/A	Average
4	5725.000	25.46	21.00	46.46	-7.54	54.00	Average
5	5740.200	25.69	21.05	46.74	-7.26	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/29.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac160 at channel 5570MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

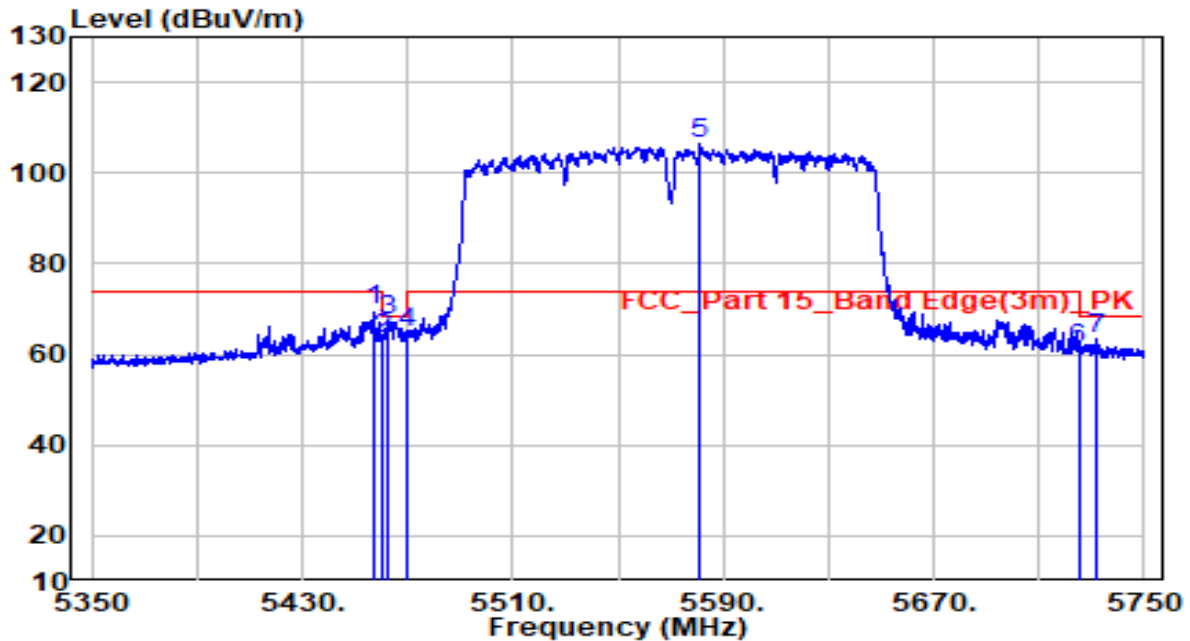


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5457.000	49.32	20.23	69.55	-4.45	74.00	Peak
2	5460.000	43.27	20.23	63.50	-4.70	68.20	Peak
3	5462.800	47.19	20.23	67.42	-0.78	68.20	Peak
4	5470.000	44.49	20.24	64.73	-3.47	68.20	Peak
5	* 5581.400	85.99	20.53	106.52	N/A	N/A	Peak
6	5725.000	40.23	21.00	61.23	-6.97	68.20	Peak
7	5731.400	42.48	21.02	63.50	-4.70	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/29.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac160 at channel 5570MHz(CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

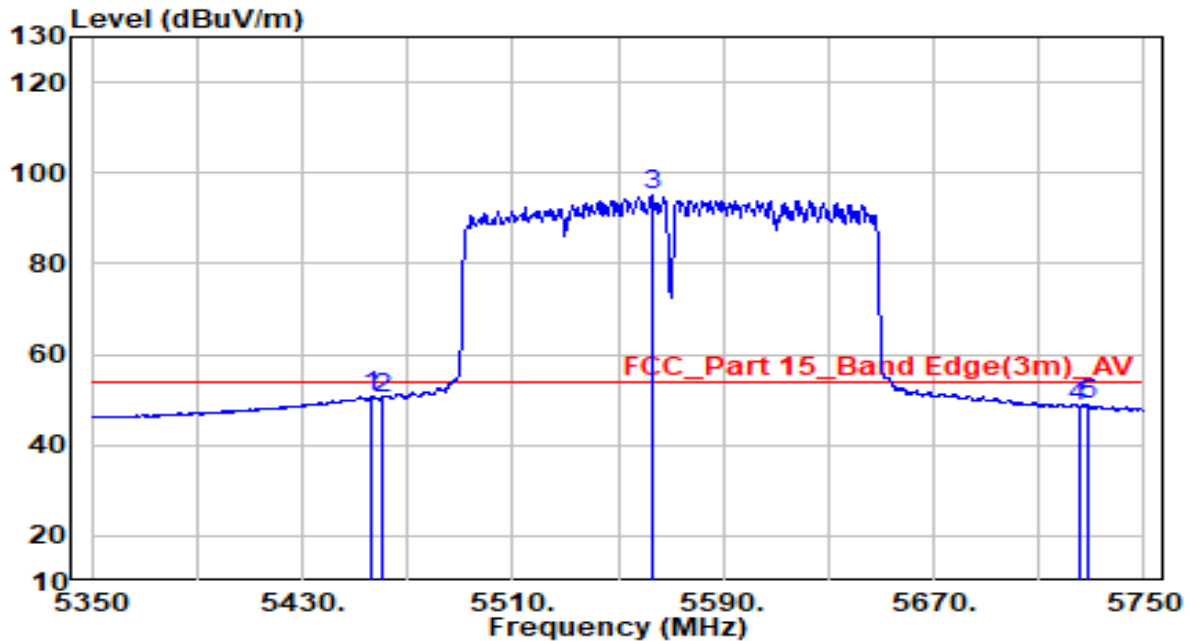


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5456.400	30.49	20.22	50.71	-3.29	54.00	Average
2	5460.000	29.99	20.23	50.22	-3.78	54.00	Average
3	* 5562.800	74.45	20.47	94.92	N/A	N/A	Average
4	5725.000	27.36	21.00	48.36	-5.64	54.00	Average
5	5728.200	27.83	21.01	48.84	-5.16	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax20 at channel 5180MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

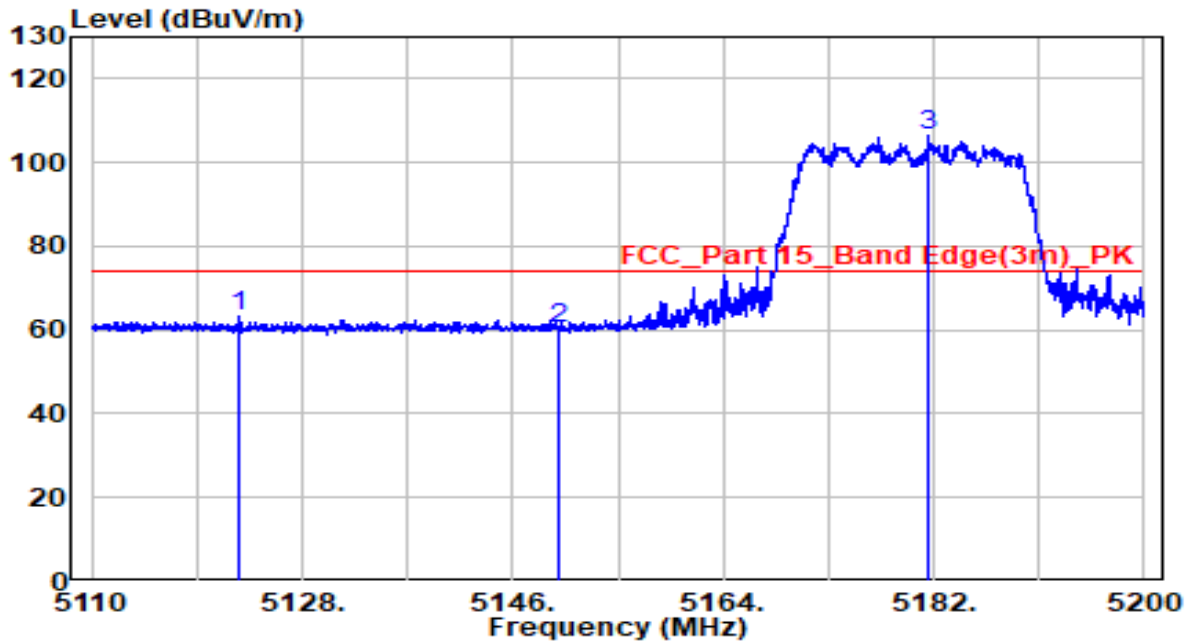


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5122.690	43.21	19.88	63.09	-10.91	74.00	Peak
2	5150.000	40.49	19.91	60.39	-13.61	74.00	Peak
3	* 5181.505	86.57	19.94	106.50	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax20 at channel 5180MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

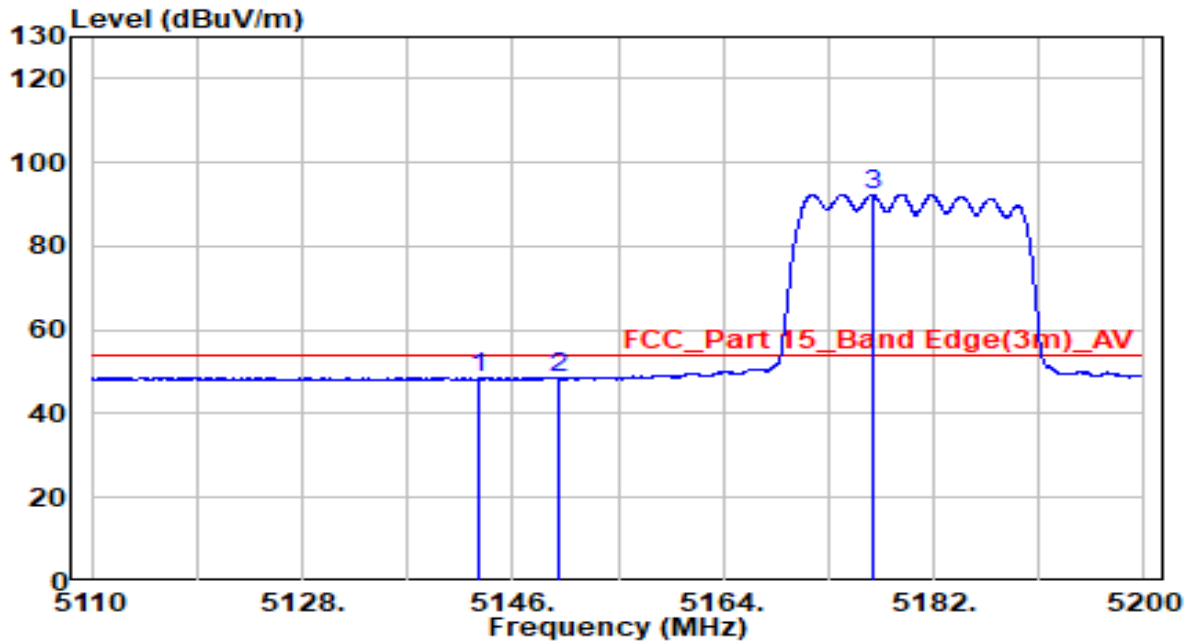


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5143.165	28.77	19.90	48.67	-5.33	54.00	Average
2	5150.000	28.62	19.91	48.53	-5.47	54.00	Average
3	* 5176.780	72.52	19.93	92.45	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax20 at channel 5180MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

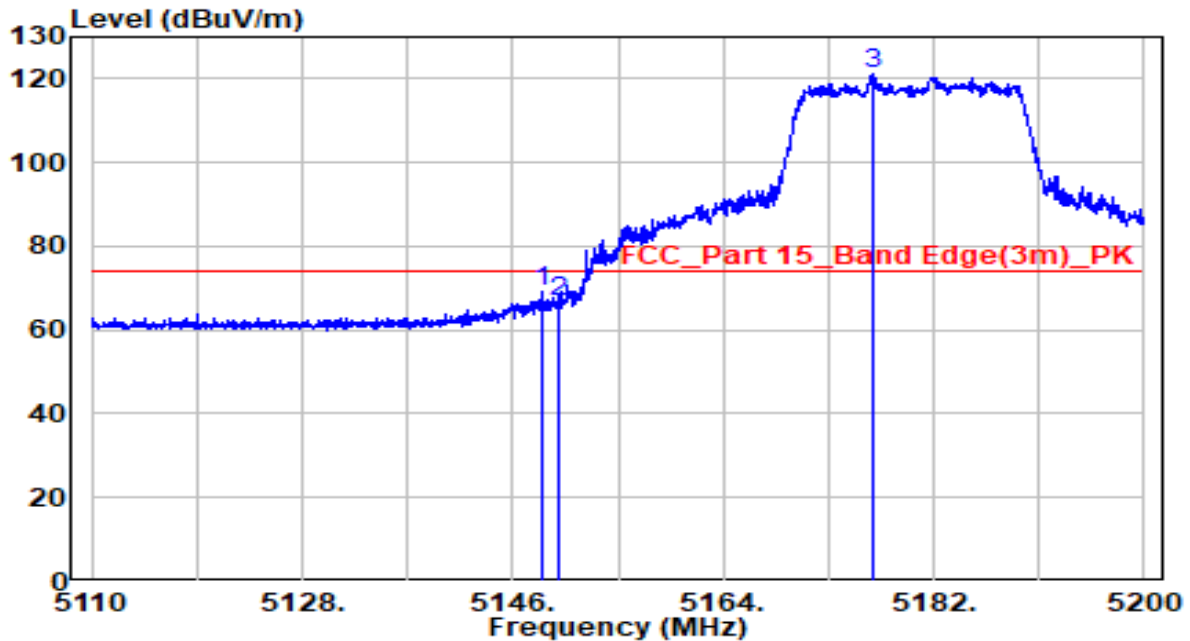


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.475	49.04	19.90	68.94	-5.06	74.00	Peak
2	5150.000	46.73	19.91	66.63	-7.37	74.00	Peak
3	* 5176.825	101.19	19.93	121.12	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax20 at channel 5180MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

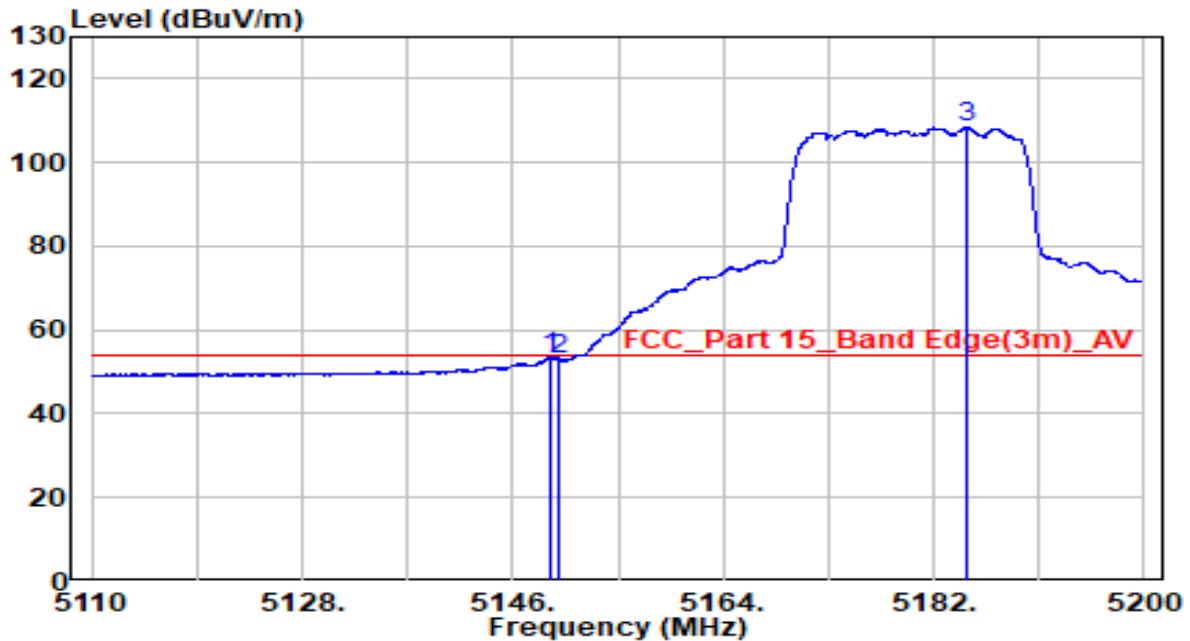


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.150	33.52	19.91	53.42	-0.58	54.00	Average
2	5150.000	33.13	19.91	53.04	-0.96	54.00	Average
3	* 5184.880	88.37	19.94	108.31	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax20 at channel 5500MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

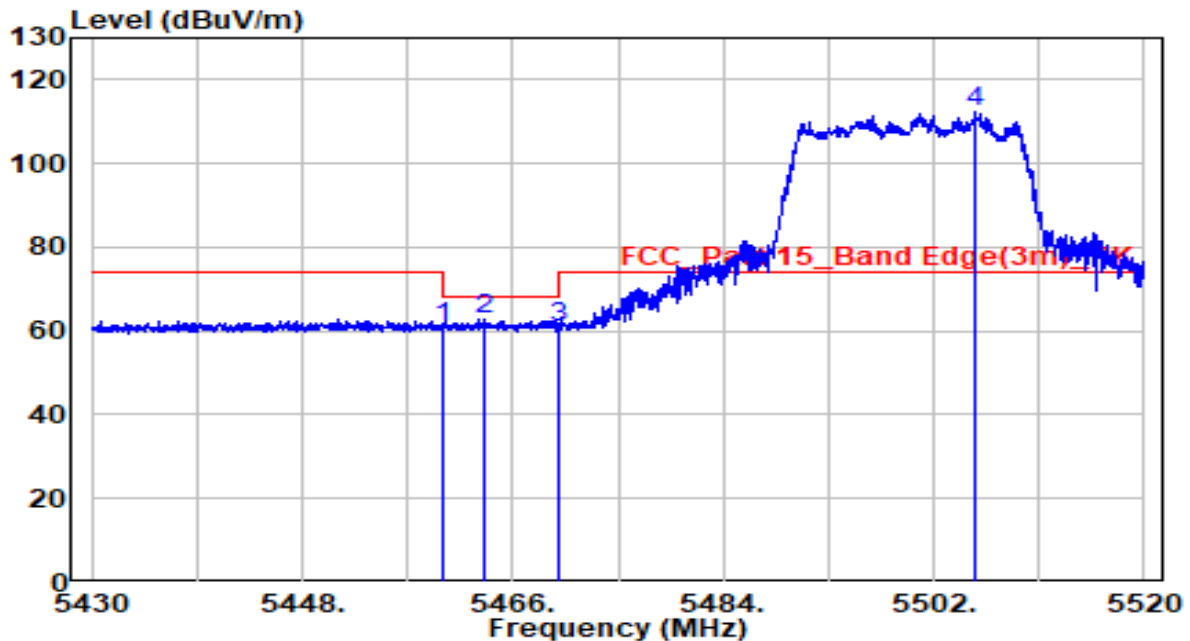


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	40.73	20.23	60.96	-7.24	68.20	Peak
2	5463.615	42.73	20.23	62.96	-5.24	68.20	Peak
3	5470.000	40.45	20.24	60.69	-7.51	68.20	Peak
4	* 5505.510	92.17	20.29	112.46	N/A	N/A	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax20 at channel 5500MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

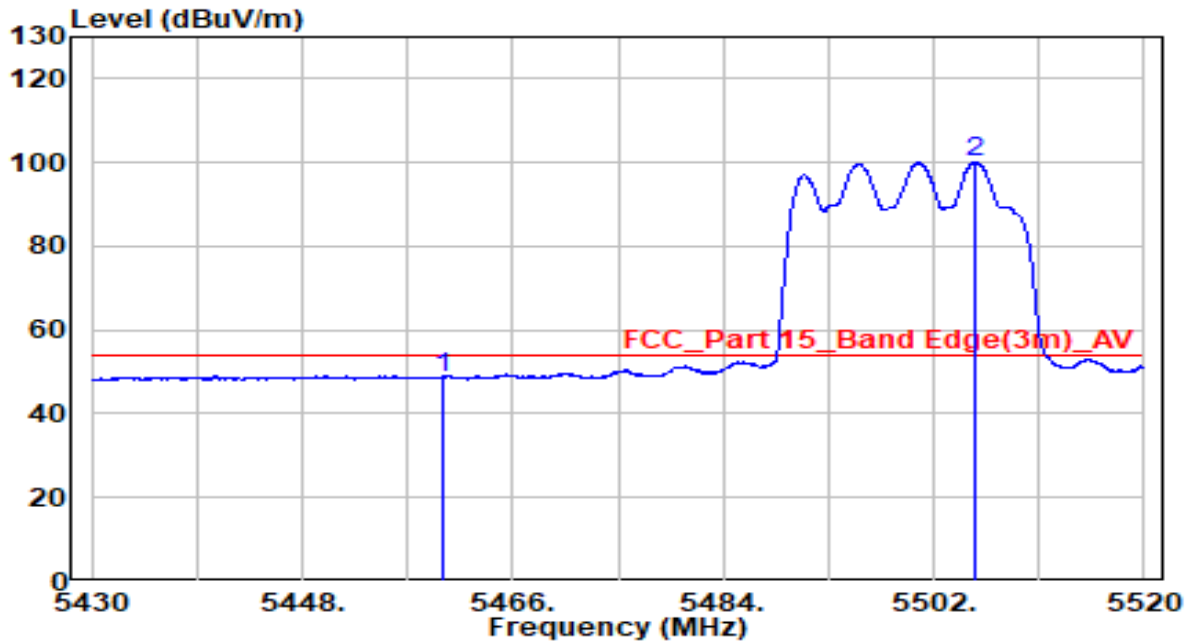


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	28.56	20.23	48.79	-5.21	54.00	Average
2	* 5505.510	79.79	20.29	100.08	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax20 at channel 5500MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

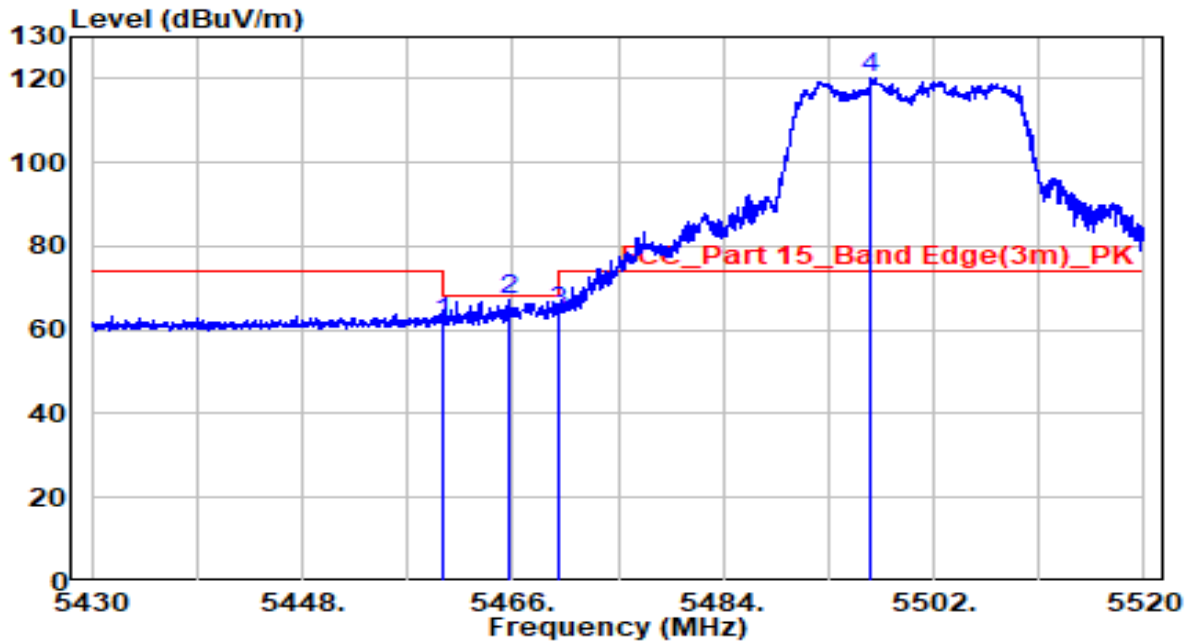


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	41.80	20.23	62.03	-6.17	68.20	Peak
2	5465.685	47.06	20.23	67.29	-0.91	68.20	Peak
3	5470.000	43.92	20.24	64.16	-4.04	68.20	Peak
4	* 5496.690	99.94	20.27	120.21	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax20 at channel 5500MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

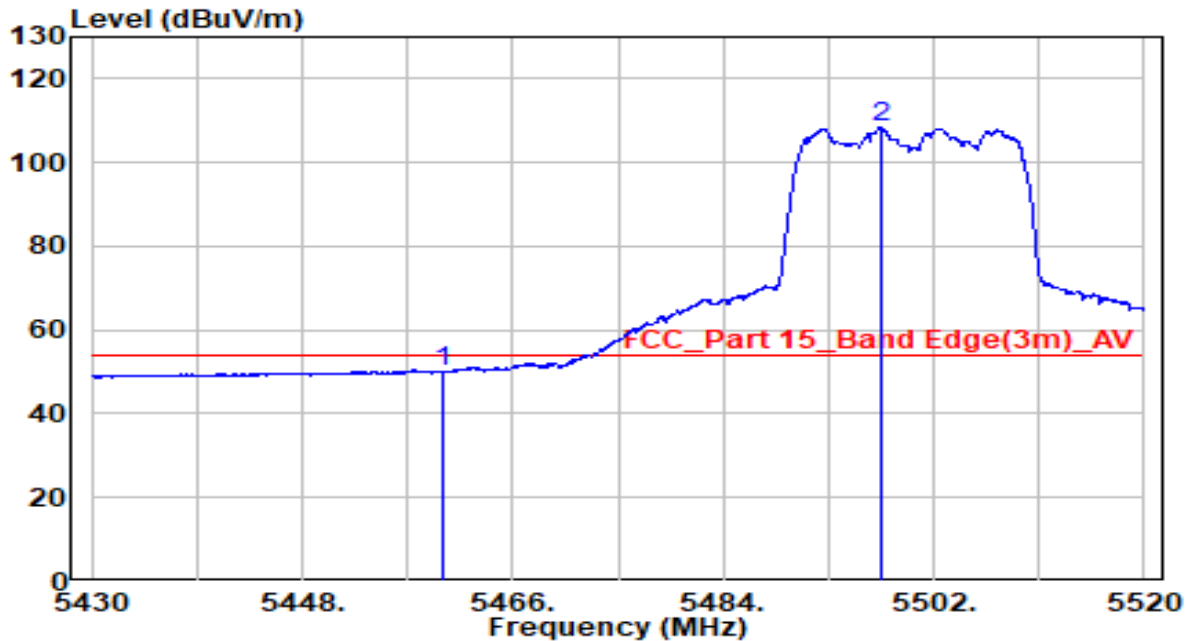


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	29.67	20.23	49.89	-4.11	54.00	Average
2	* 5497.500	88.09	20.27	108.35	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax20 at channel 5700MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

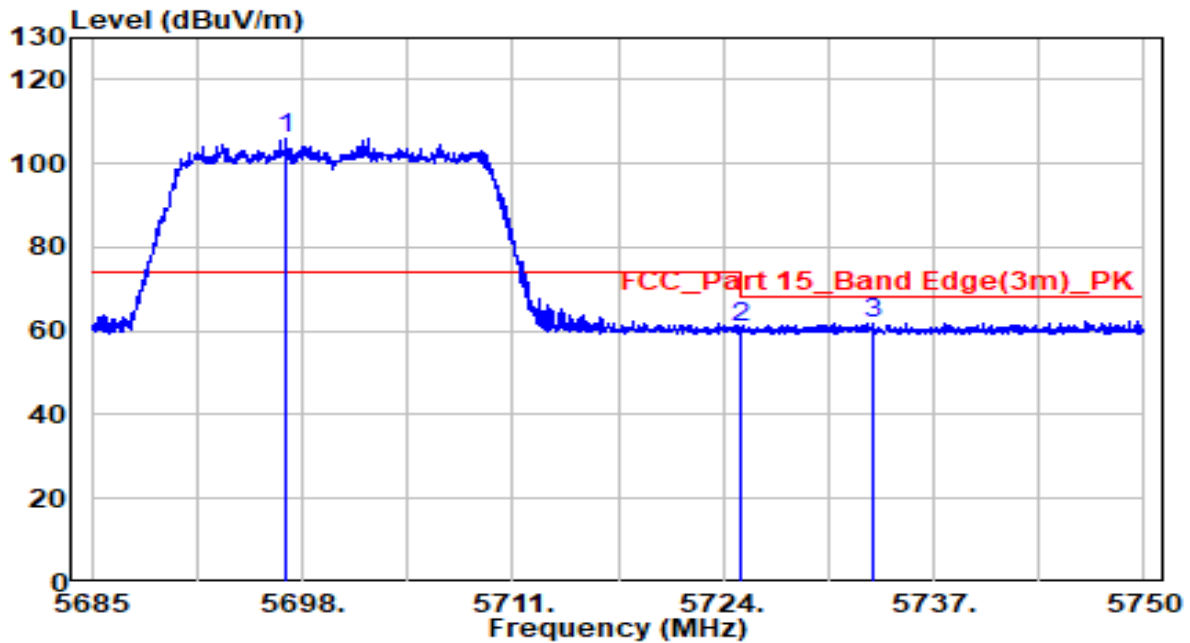


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5697.058	85.13	20.91	106.04	N/A	N/A	Peak
2		5725.000	39.71	21.00	60.71	-7.49	68.20	Peak
3		5733.230	40.93	21.03	61.96	-6.24	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax20 at channel 5700MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

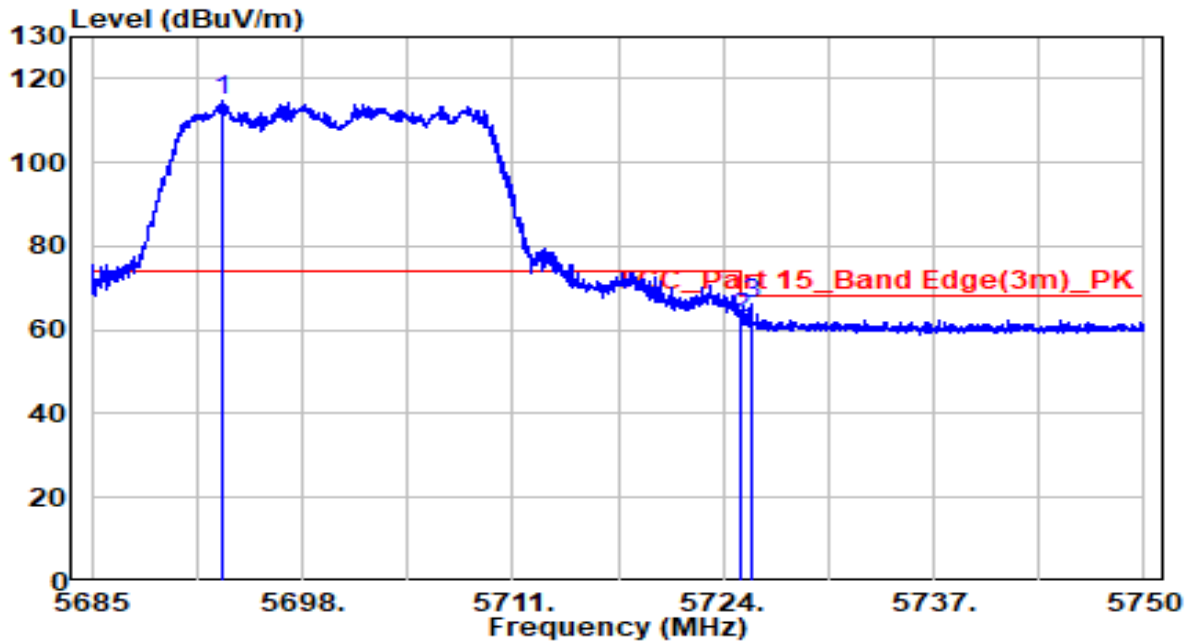


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5693.027	93.93	20.90	114.83	N/A	N/A	Peak
2		5725.000	41.92	21.00	62.92	-5.28	68.20	Peak
3		5725.755	45.13	21.00	66.13	-2.07	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax20 at channel 5745MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

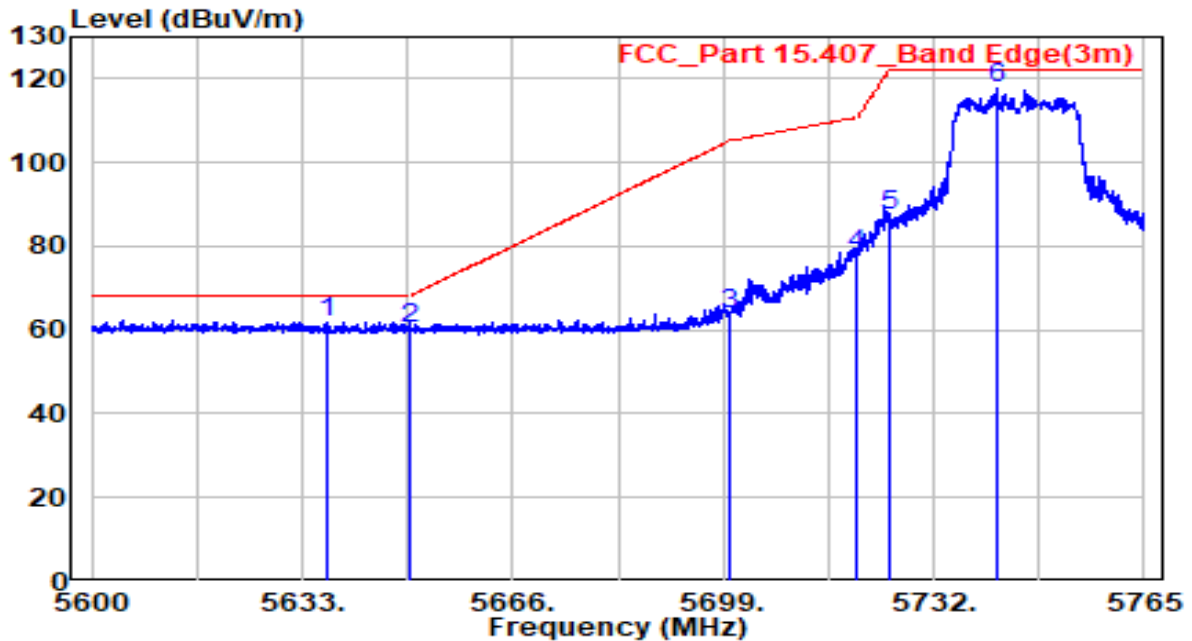


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5637.042	41.09	20.71	61.80	-6.40	68.20	Peak
2	5650.000	39.80	20.76	60.56	-7.64	68.20	Peak
3	5700.000	43.01	20.92	63.93	-41.27	105.20	Peak
4	5720.000	56.94	20.98	77.92	-32.88	110.80	Peak
5	5725.000	66.40	21.00	87.40	-34.80	122.20	Peak
6	* 5741.900	96.52	21.05	117.57	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax20 at channel 5745MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

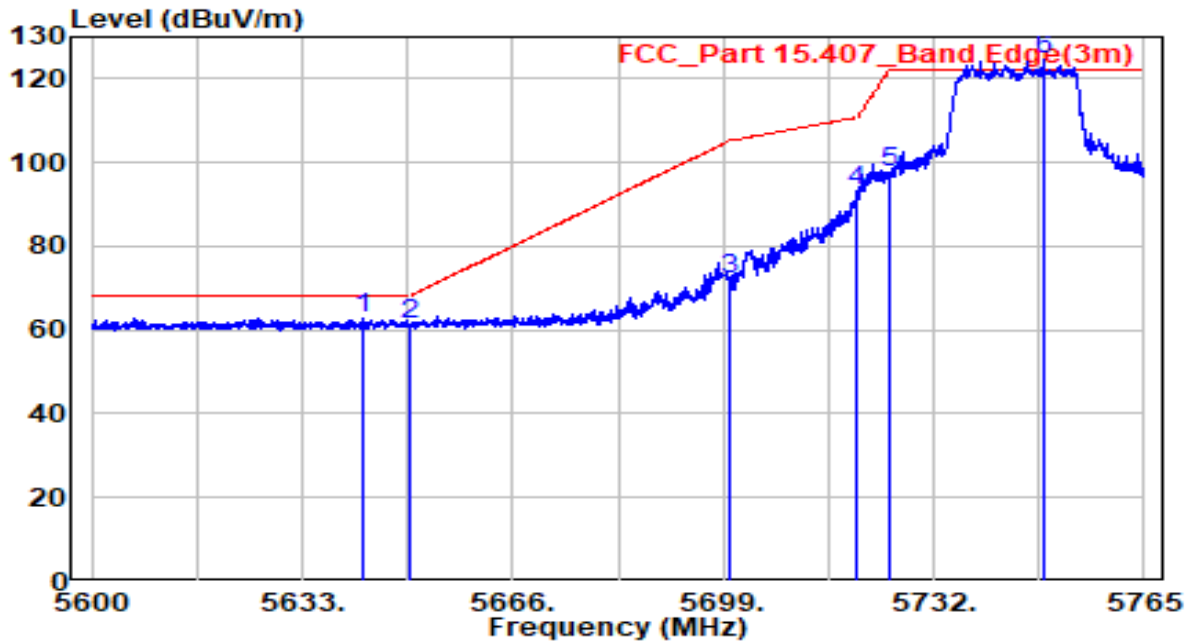


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5642.322	42.19	20.73	62.93	-5.27	68.20	Peak
2	5650.000	40.75	20.76	61.51	-6.69	68.20	Peak
3	5700.000	51.18	20.92	72.10	-33.10	105.20	Peak
4	5720.000	72.19	20.98	93.17	-17.63	110.80	Peak
5	5725.000	76.65	21.00	97.65	-24.55	122.20	Peak
6	* 5749.243	103.49	21.08	124.57	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax20 at channel 5825MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

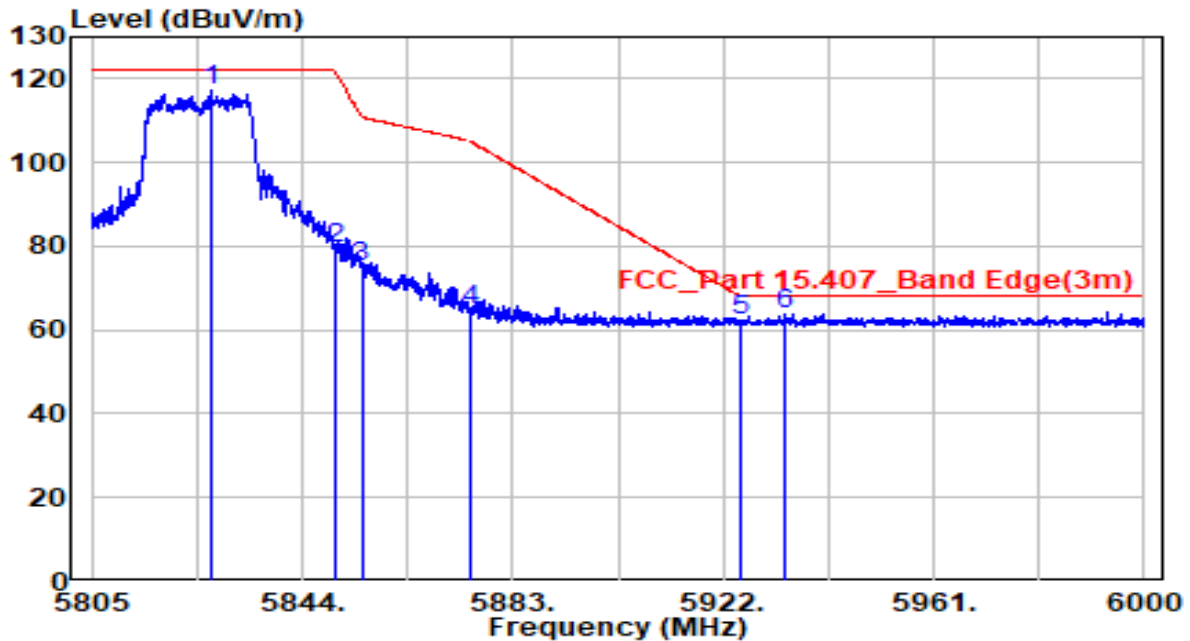


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5826.938	95.86	21.33	117.19	N/A	N/A	Peak
2	5850.000	57.90	21.40	79.30	-42.90	122.20	Peak
3	5855.000	53.83	21.42	75.25	-35.55	110.80	Peak
4	5875.000	43.25	21.49	64.73	-40.47	105.20	Peak
5	5925.000	40.54	21.65	62.19	-6.01	68.20	Peak
6	* 5933.310	42.28	21.67	63.96	-4.24	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax20 at channel 5825MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

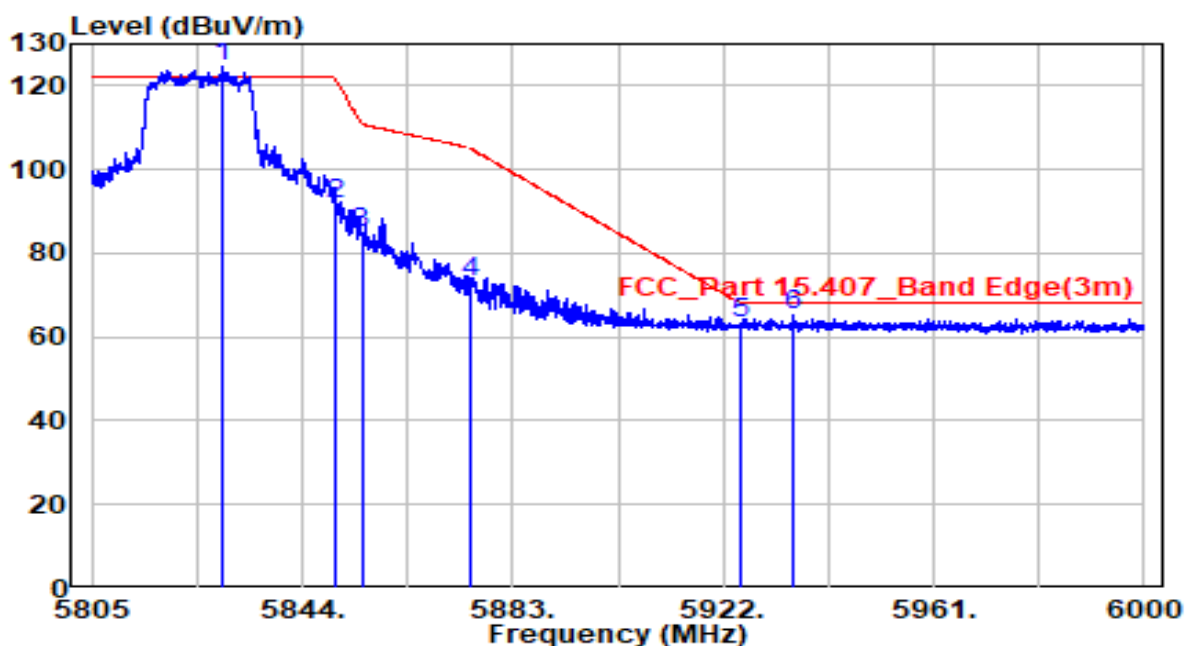


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5829.277	103.25	21.34	124.59	N/A	N/A	Peak
2		5850.000	70.58	21.40	91.98	-30.22	122.20	Peak
3		5855.000	63.30	21.42	84.72	-26.08	110.80	Peak
4		5875.000	51.49	21.49	72.98	-32.22	105.20	Peak
5		5925.000	41.50	21.65	63.14	-5.06	68.20	Peak
6		5935.163	43.79	21.68	65.47	-2.73	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5190MHz(CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

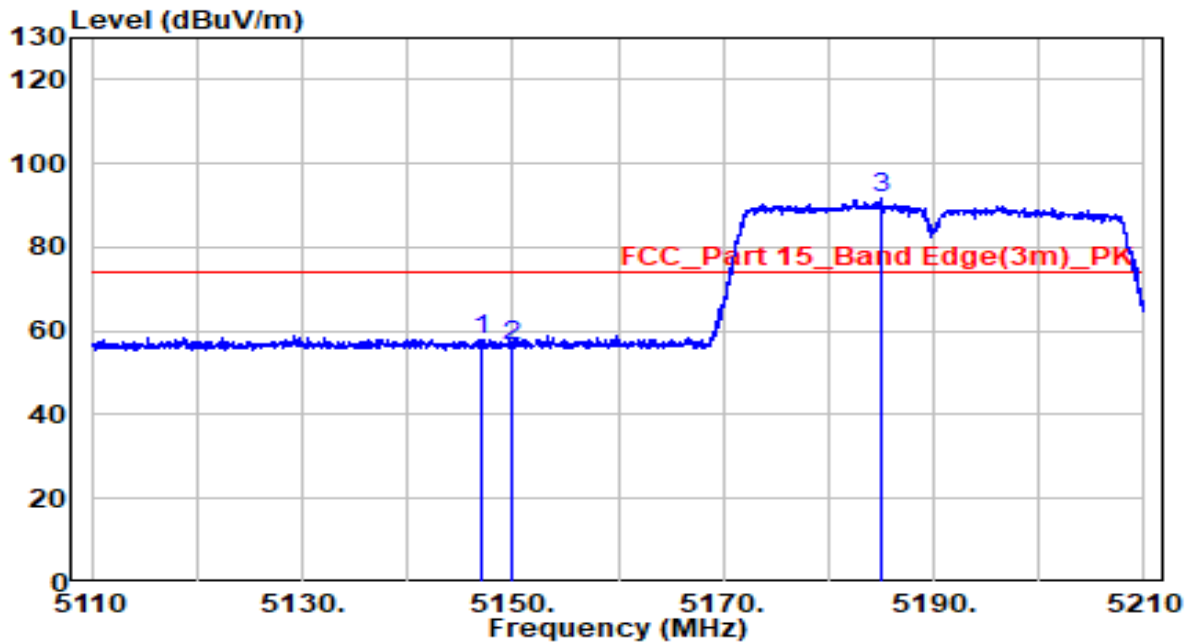


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5147.050	38.02	19.90	57.92	-16.08	74.00	Peak
2	5150.000	36.71	19.91	56.62	-17.38	74.00	Peak
3	* 5185.000	71.87	19.94	91.81	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5190MHz,(CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

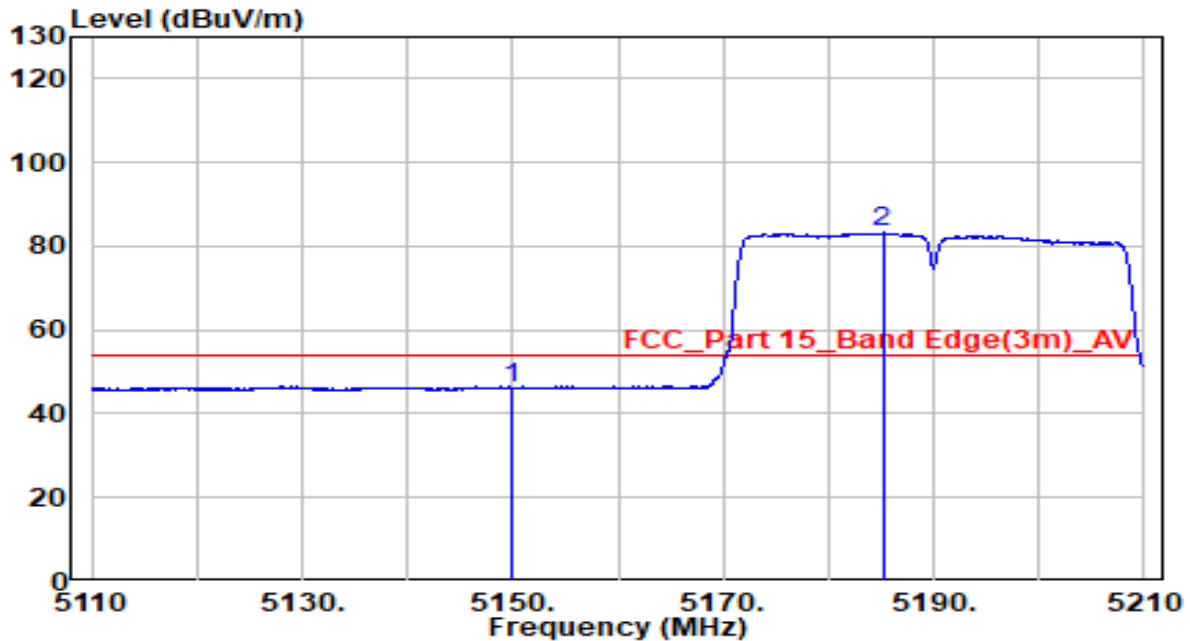


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	26.24	19.91	46.14	-7.86	54.00	Average
2	* 5185.150	63.27	19.94	83.21	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5190MHz(CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

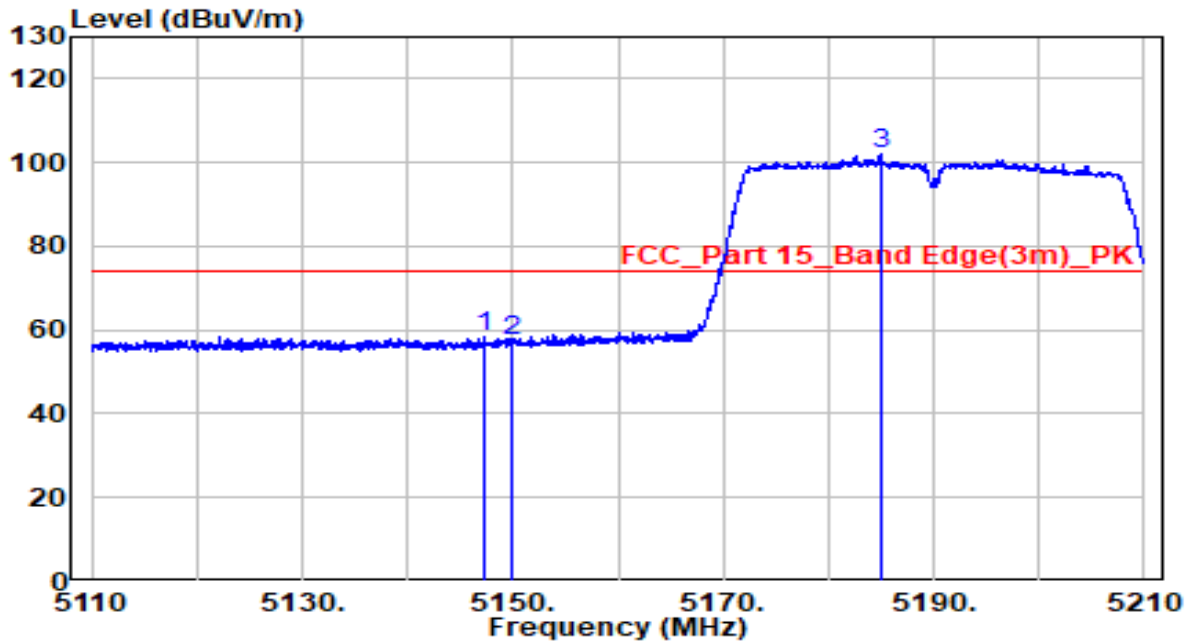


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5147.350	38.42	19.90	58.32	-15.68	74.00	Peak
2	5150.000	37.49	19.91	57.39	-16.61	74.00	Peak
3	* 5184.900	81.96	19.94	101.90	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5190MHz(CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

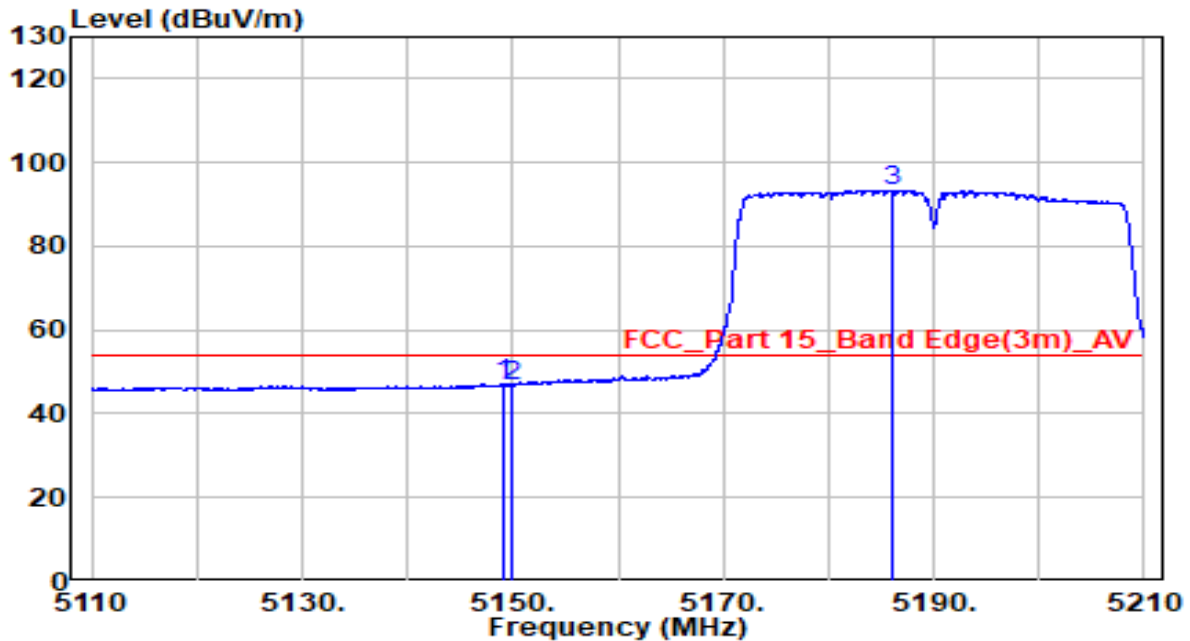


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.050	27.26	19.91	47.16	-6.84	54.00	Average
2	5150.000	26.93	19.91	46.84	-7.16	54.00	Average
3	* 5186.000	73.40	19.94	93.34	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax40 at channel 5510MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

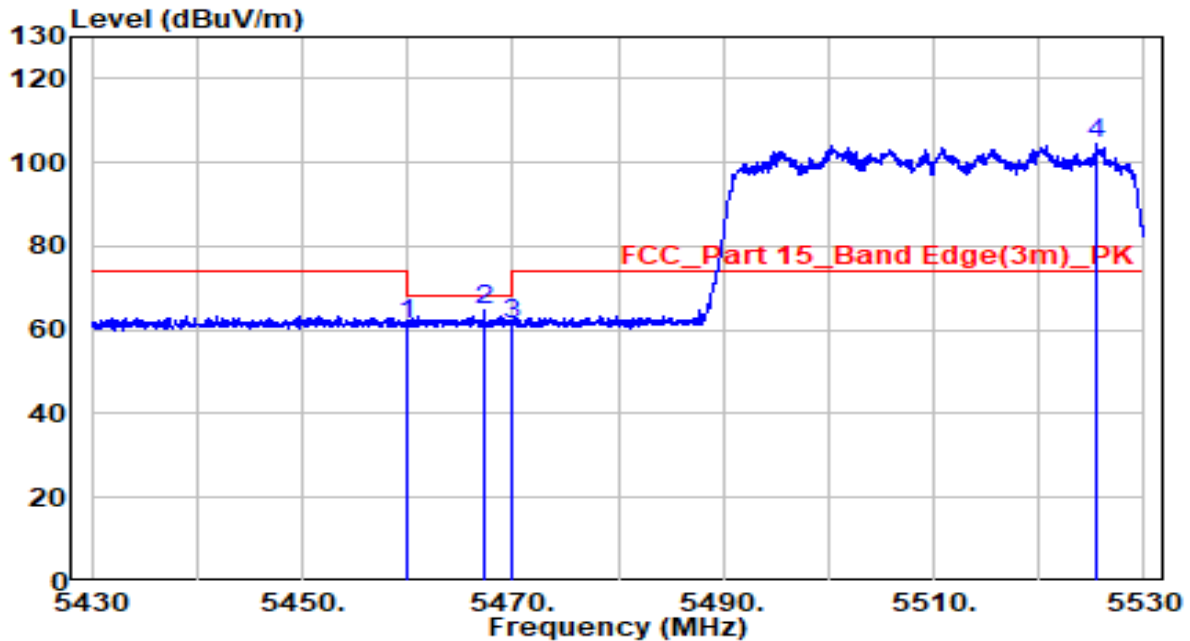


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	41.18	20.23	61.41	-6.79	68.20	Peak
2	5467.350	44.49	20.24	64.73	-3.47	68.20	Peak
3	5470.000	41.08	20.24	61.32	-6.88	68.20	Peak
4	* 5525.550	84.28	20.35	104.63	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax40 at channel 5510MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

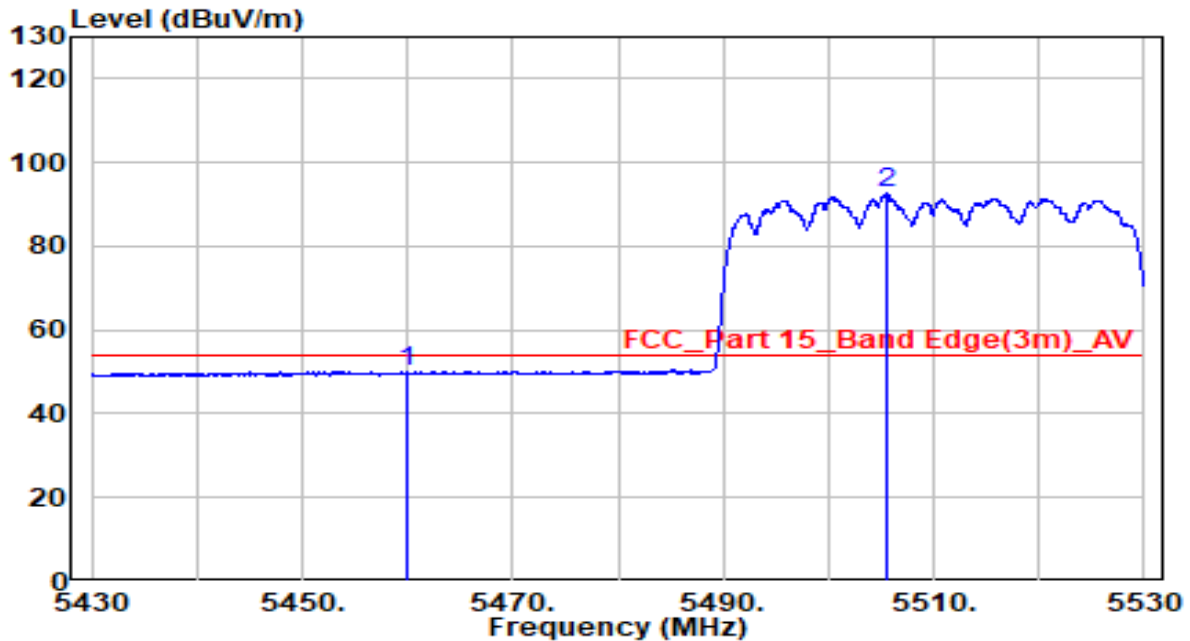


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	29.62	20.23	49.84	-4.16	54.00	Average
2	* 5505.500	72.22	20.29	92.50	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax40 at channel 5510MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

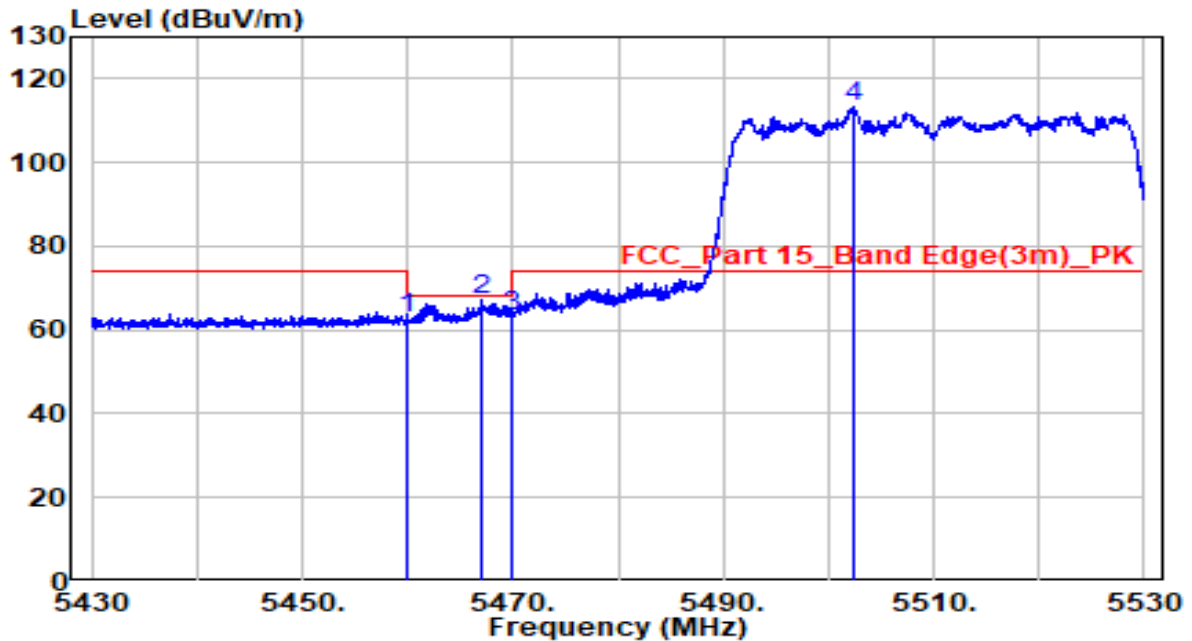


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	42.33	20.23	62.56	-5.64	68.20	Peak
2	5467.150	47.12	20.24	67.36	-0.84	68.20	Peak
3	5470.000	43.17	20.24	63.41	-4.79	68.20	Peak
4	* 5502.300	93.14	20.28	113.42	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax40 at channel 5510MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

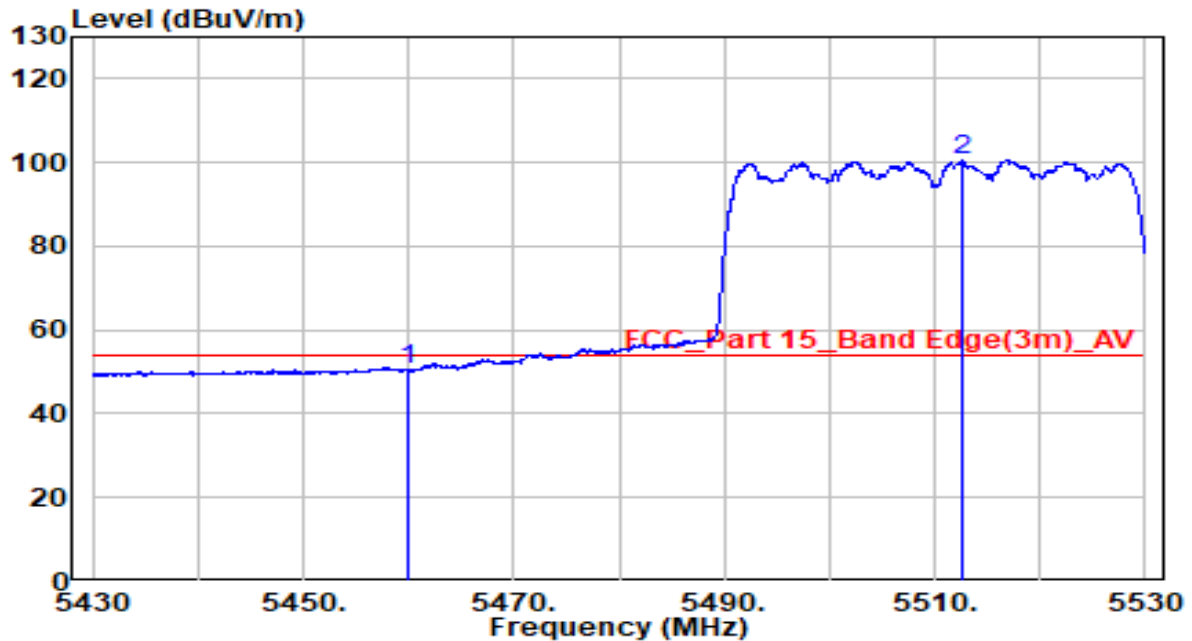


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	30.27	20.23	50.50	-3.50	54.00	Average
2	* 5512.550	80.20	20.31	100.51	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax40 at channel 5670MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

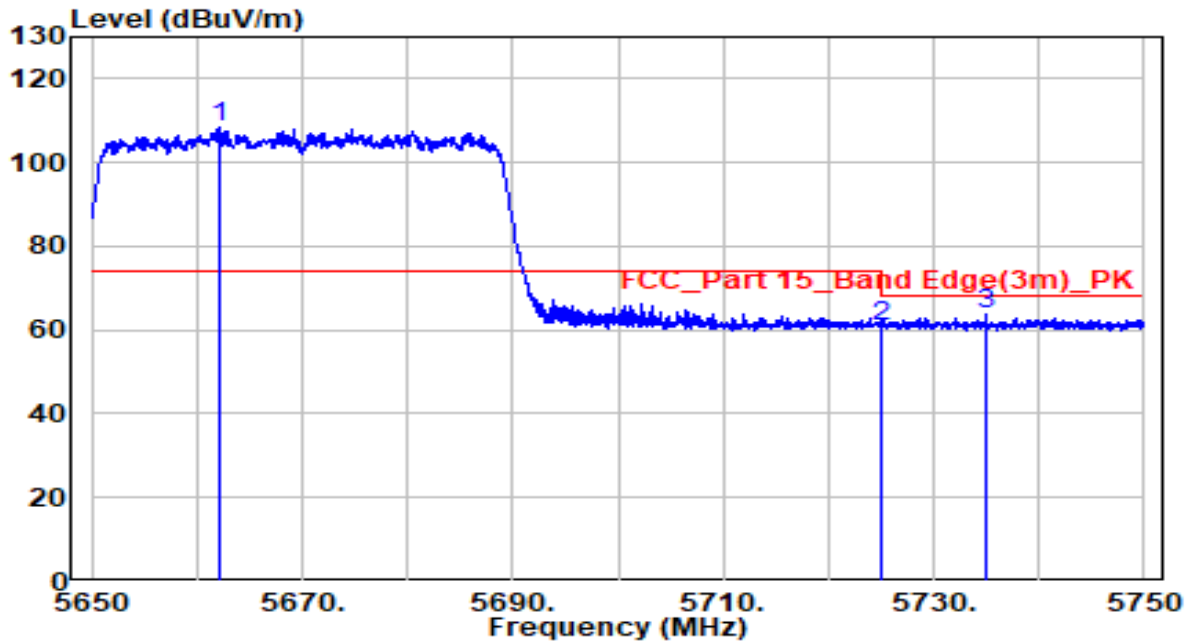


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5662.150	87.42	20.80	108.21	N/A	N/A	Peak
2		5725.000	39.95	21.00	60.95	-7.25	68.20	Peak
3		5735.050	42.74	21.03	63.77	-4.43	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax40 at channel 5670MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

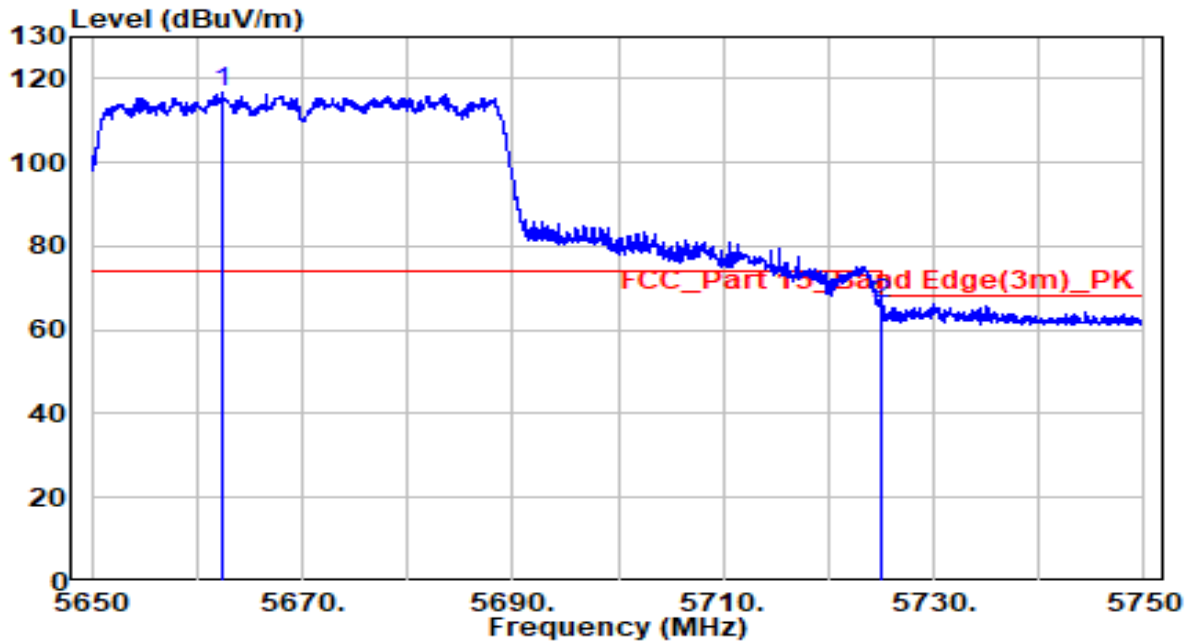


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5662.350	96.03	20.80	116.82	N/A	N/A	Peak
2		5725.000	45.37	21.00	66.37	-1.83	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax40 at channel 5755MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

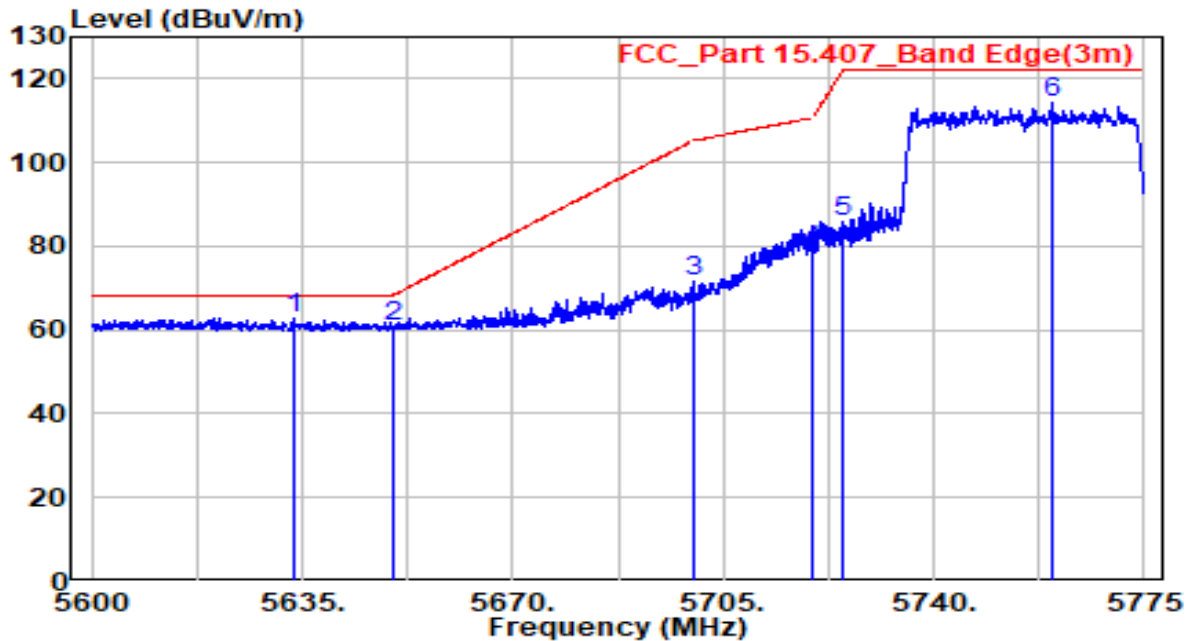


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5633.688	42.12	20.70	62.82	-5.38	68.20	Peak
2		5650.000	40.03	20.76	60.78	-7.42	68.20	Peak
3		5700.000	50.46	20.92	71.38	-33.82	105.20	Peak
4		5720.000	58.23	20.98	79.21	-31.59	110.80	Peak
5		5725.000	64.63	21.00	85.63	-36.57	122.20	Peak
6		5759.775	93.00	21.11	114.11	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax40 at channel 5755MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

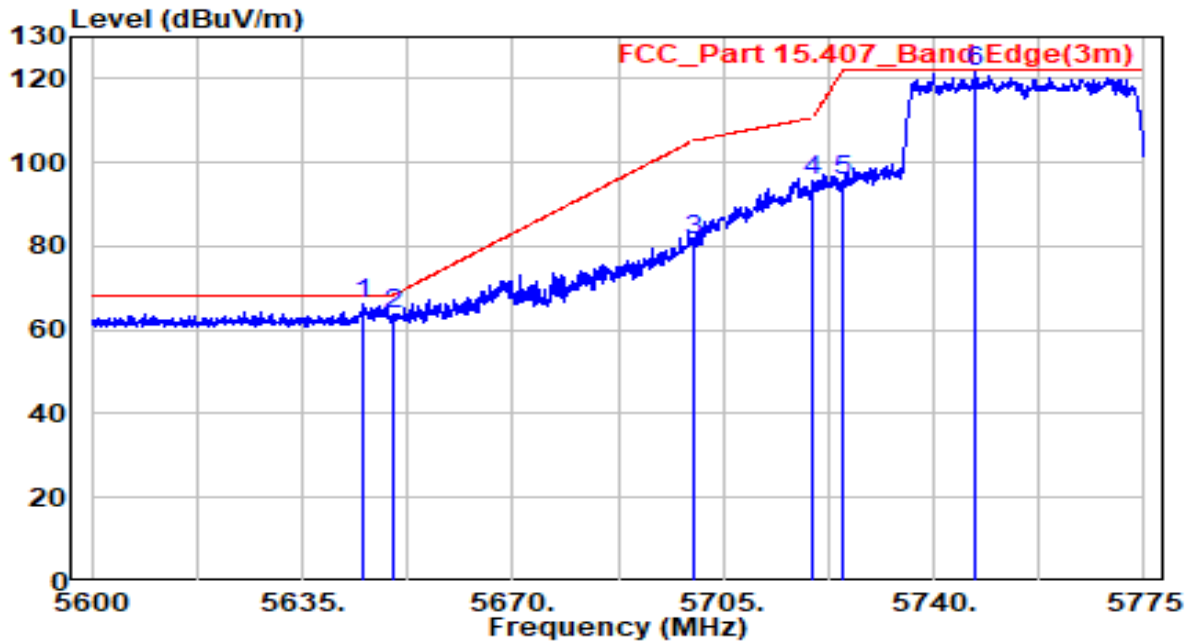


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5645.150	45.36	20.74	66.10	-2.10	68.20	Peak
2	5650.000	42.86	20.76	63.62	-4.58	68.20	Peak
3	5700.000	60.56	20.92	81.47	-23.73	105.20	Peak
4	5720.000	74.67	20.98	95.66	-15.14	110.80	Peak
5	5725.000	74.49	21.00	95.49	-26.71	122.20	Peak
6	* 5747.000	100.38	21.07	121.45	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax40 at channel 5795MHz(CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

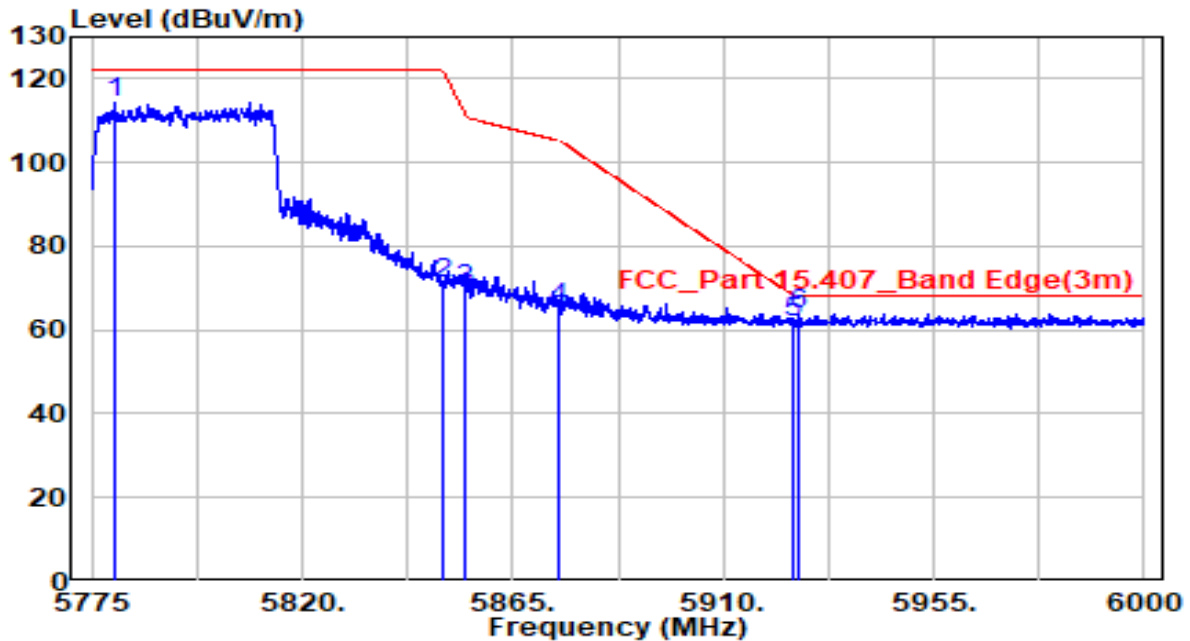


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5780.063	93.28	21.18	114.46	N/A	N/A	Peak
2	5850.000	49.68	21.40	71.08	-51.12	122.20	Peak
3	5855.000	48.34	21.42	69.76	-41.04	110.80	Peak
4	5875.000	43.53	21.49	65.02	-40.18	105.20	Peak
5	5925.000	40.23	21.65	61.88	-6.32	68.20	Peak
6	* 5926.200	42.28	21.65	63.93	-4.27	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax40 at channel 5795MHz(CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

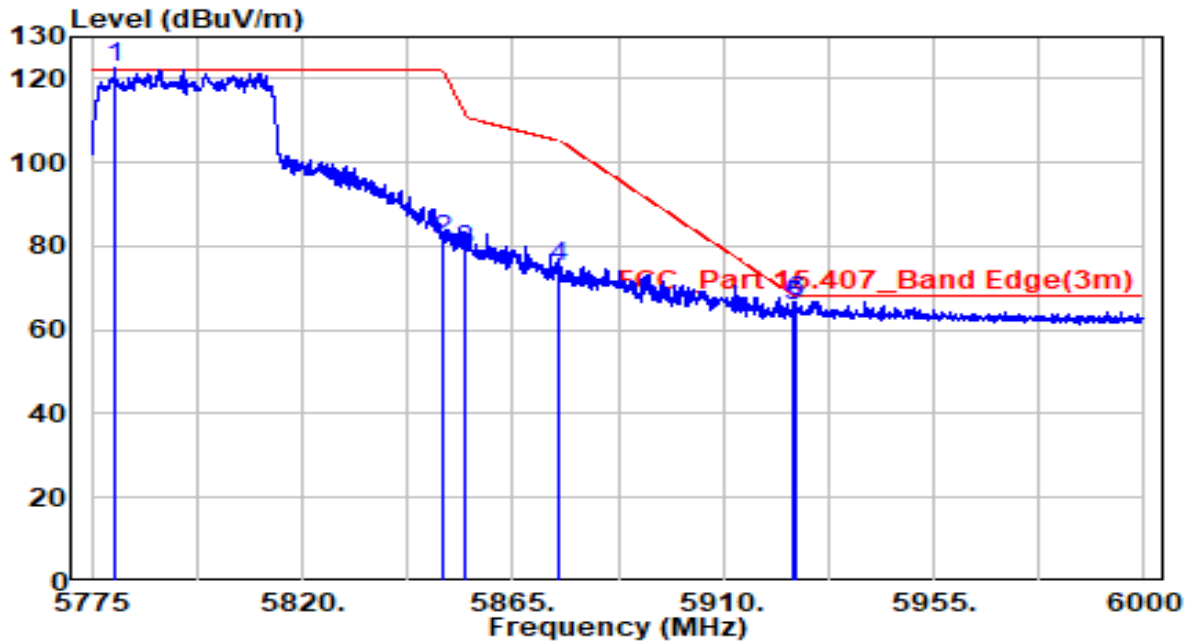


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5779.837	101.55	21.18	122.73	N/A	N/A	Peak
2		5850.000	59.92	21.40	81.32	-40.88	122.20	Peak
3		5855.000	57.79	21.42	79.21	-31.59	110.80	Peak
4		5875.000	53.42	21.49	74.90	-30.30	105.20	Peak
5		5925.000	44.02	21.65	65.67	-2.53	68.20	Peak
6		5925.750	45.20	21.65	66.85	-1.35	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5210MHz(CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

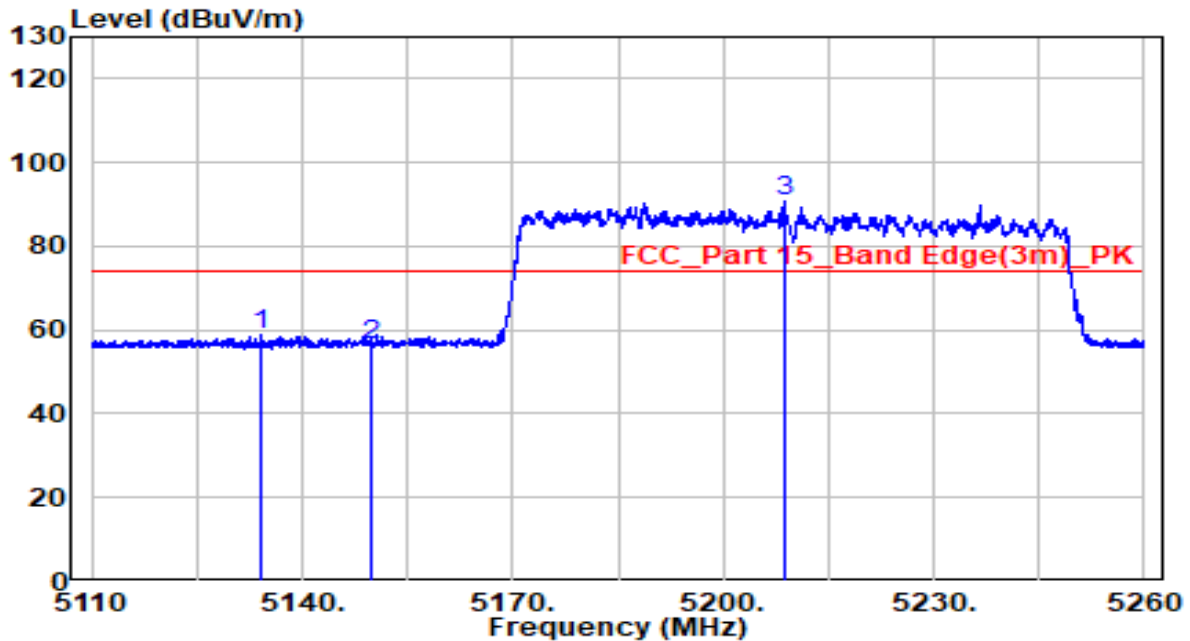


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5134.150	38.85	19.89	58.74	-15.26	74.00	Peak
2	5150.000	36.63	19.91	56.54	-17.46	74.00	Peak
3	* 5208.700	70.64	19.97	90.61	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5210MHz(CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

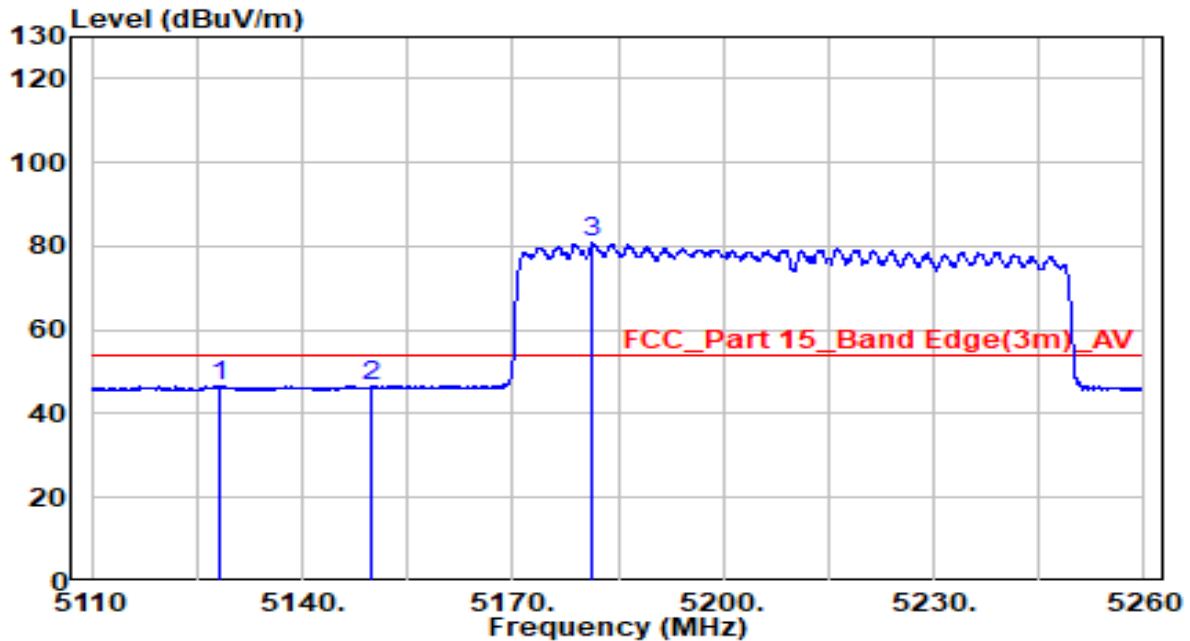


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5128.300	26.82	19.88	46.70	-7.30	54.00	Average
2	5150.000	26.60	19.91	46.51	-7.49	54.00	Average
3	* 5181.325	60.88	19.94	80.81	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5210MHz(CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

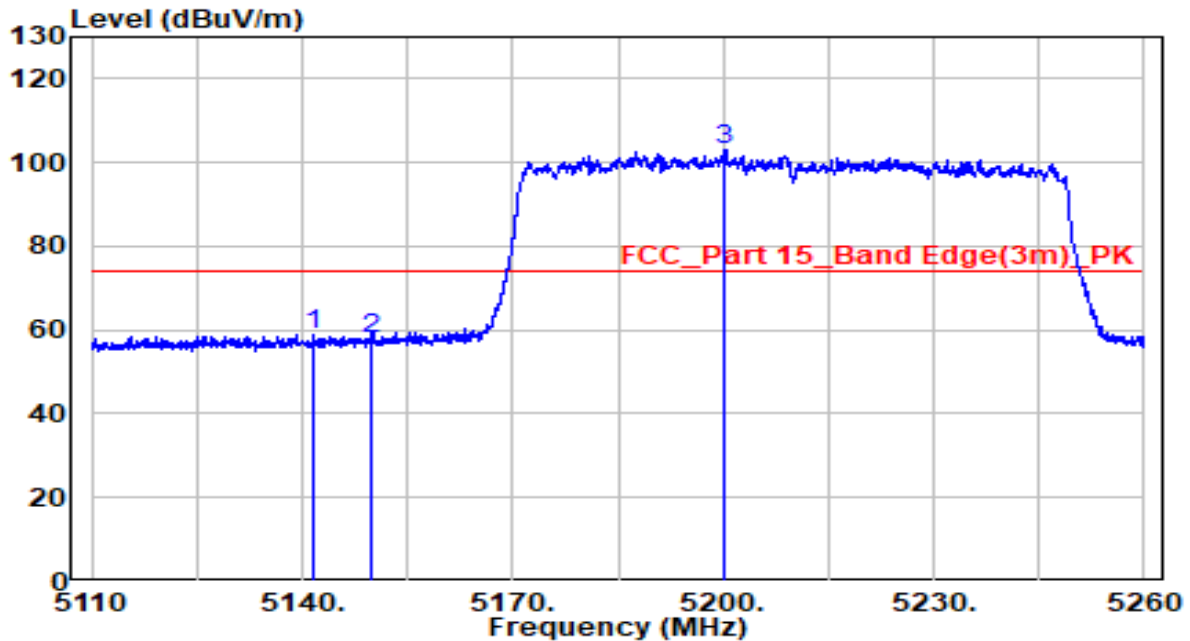


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5141.725	38.97	19.90	58.87	-15.13	74.00	Peak
2	5150.000	37.82	19.91	57.73	-16.27	74.00	Peak
3	* 5200.075	83.28	19.96	103.24	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5210MHz(CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

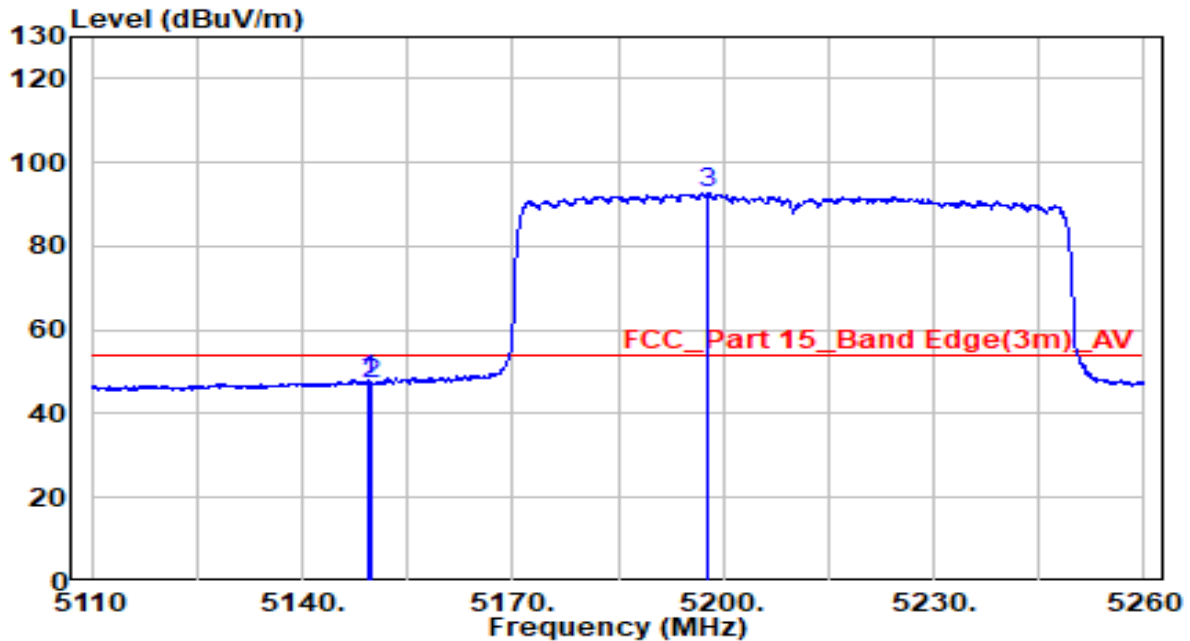


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.525	28.10	19.91	48.01	-5.99	54.00	Average
2	5150.000	27.33	19.91	47.23	-6.77	54.00	Average
3	* 5197.825	72.79	19.96	92.75	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5530MHz(CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

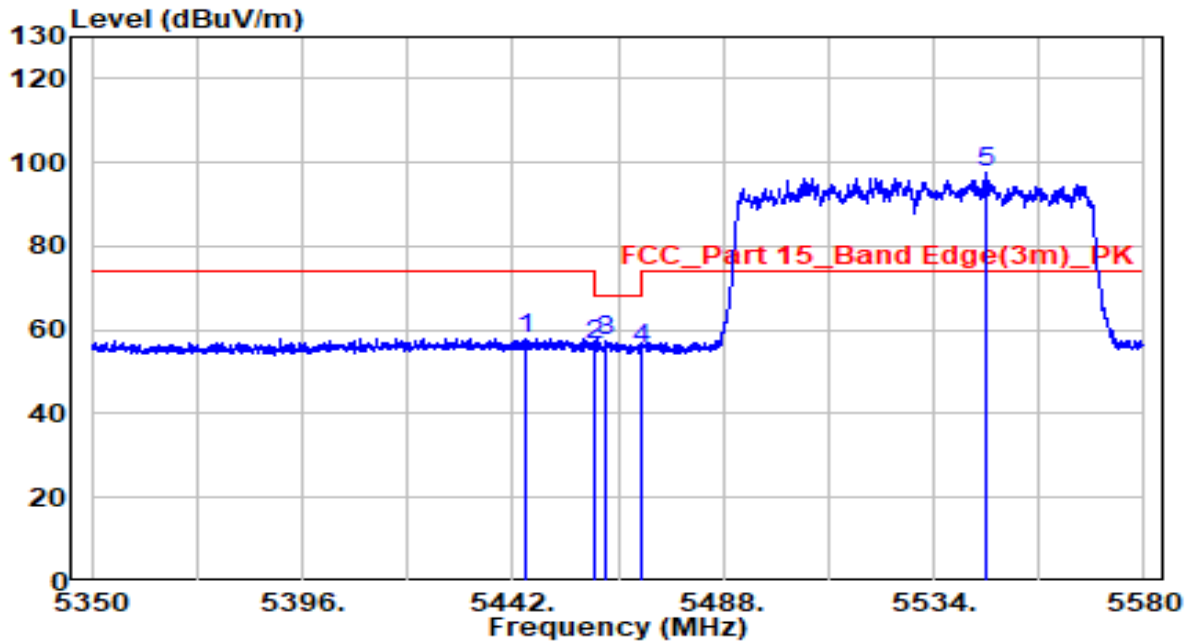


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5444.875	37.80	20.21	58.01	-15.99	74.00	Peak
2	5460.000	36.33	20.23	56.56	-11.64	68.20	Peak
3	5462.125	37.28	20.23	57.51	-10.69	68.20	Peak
4	5470.000	35.43	20.24	55.66	-12.54	68.20	Peak
5	* 5545.615	77.17	20.42	97.58	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5530MHz(CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

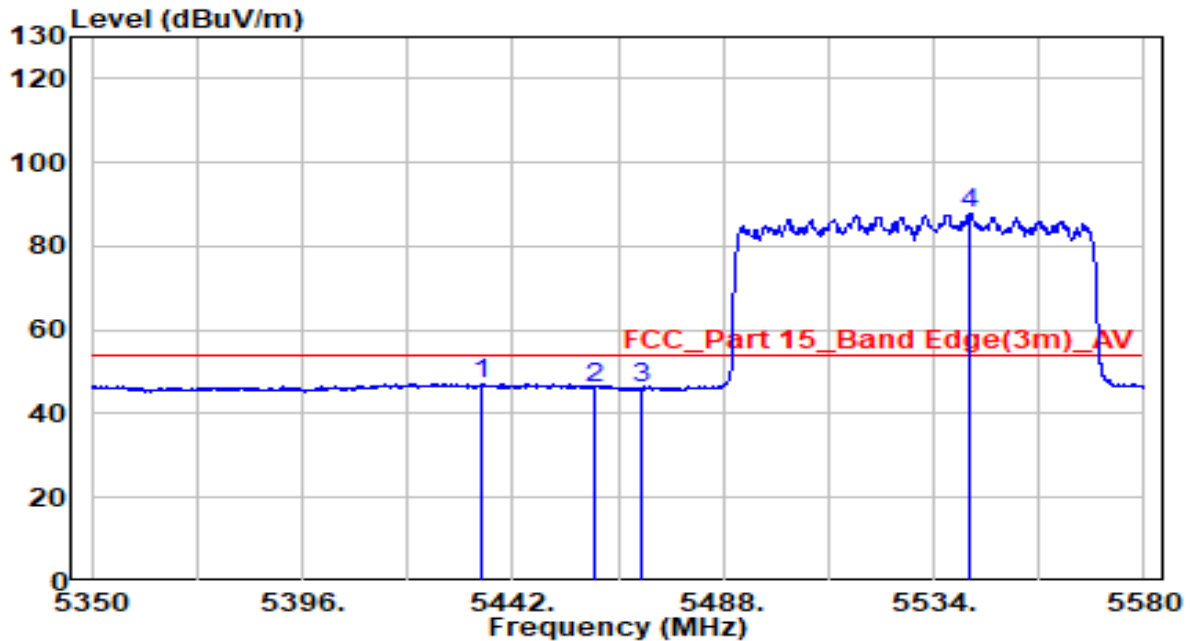


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5435.215	27.06	20.20	47.27	-6.73	54.00	Average
2	5460.000	25.92	20.23	46.15	-7.85	54.00	Average
3	5470.000	25.65	20.24	45.89	-8.11	54.00	Average
4	* 5542.050	67.61	20.41	88.02	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5530MHz(CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

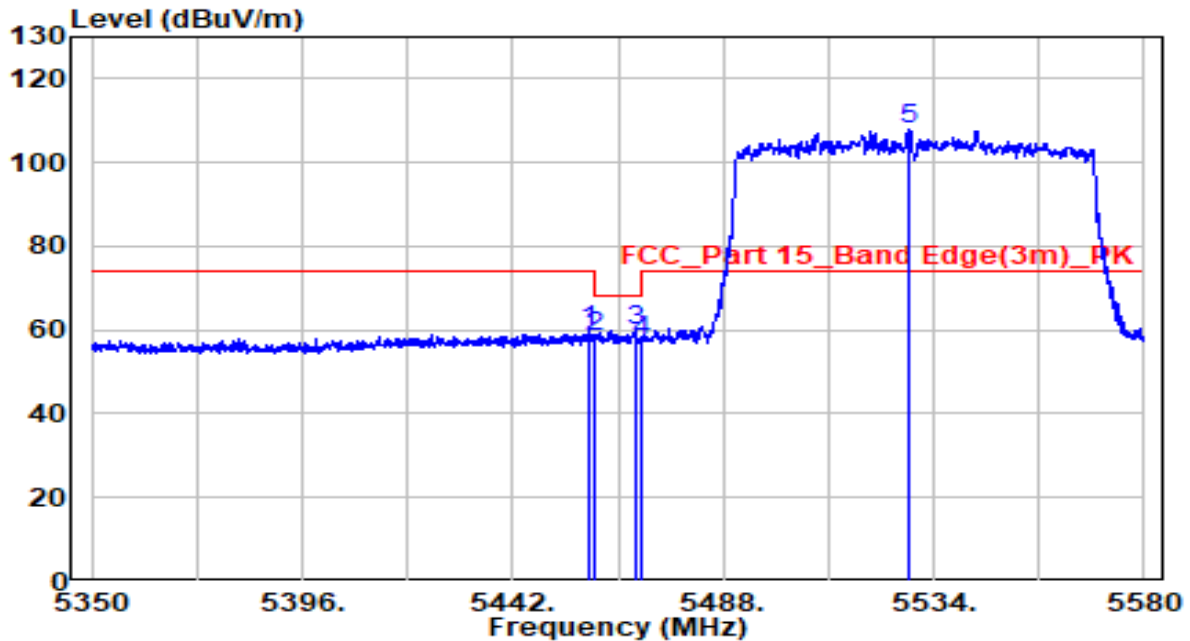


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.790	39.44	20.23	59.67	-14.33	74.00	Peak
2	5460.000	38.06	20.23	58.29	-9.91	68.20	Peak
3	5468.680	39.84	20.24	60.08	-8.12	68.20	Peak
4	5470.000	37.37	20.24	57.60	-10.60	68.20	Peak
5	* 5528.710	87.72	20.36	108.08	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5530MHz(CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

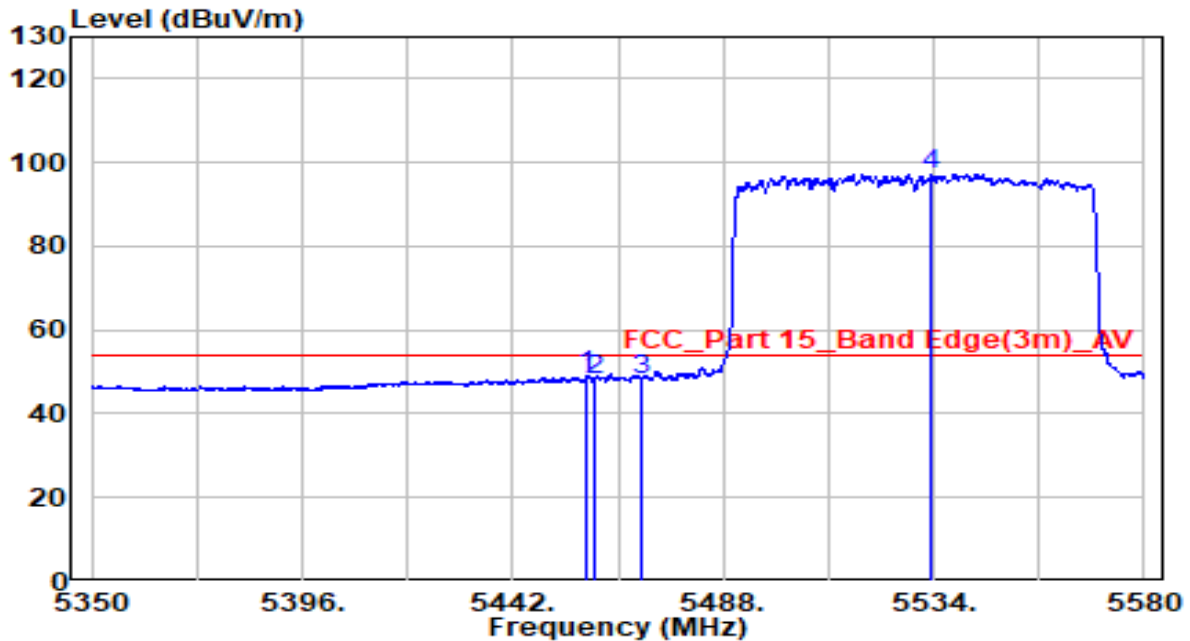


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.330	28.85	20.23	49.07	-4.93	54.00	Average
2	5460.000	27.76	20.23	47.99	-6.01	54.00	Average
3	5470.000	27.76	20.24	48.00	-6.00	54.00	Average
4	* 5533.425	76.81	20.38	97.19	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax80 at channel 5610MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

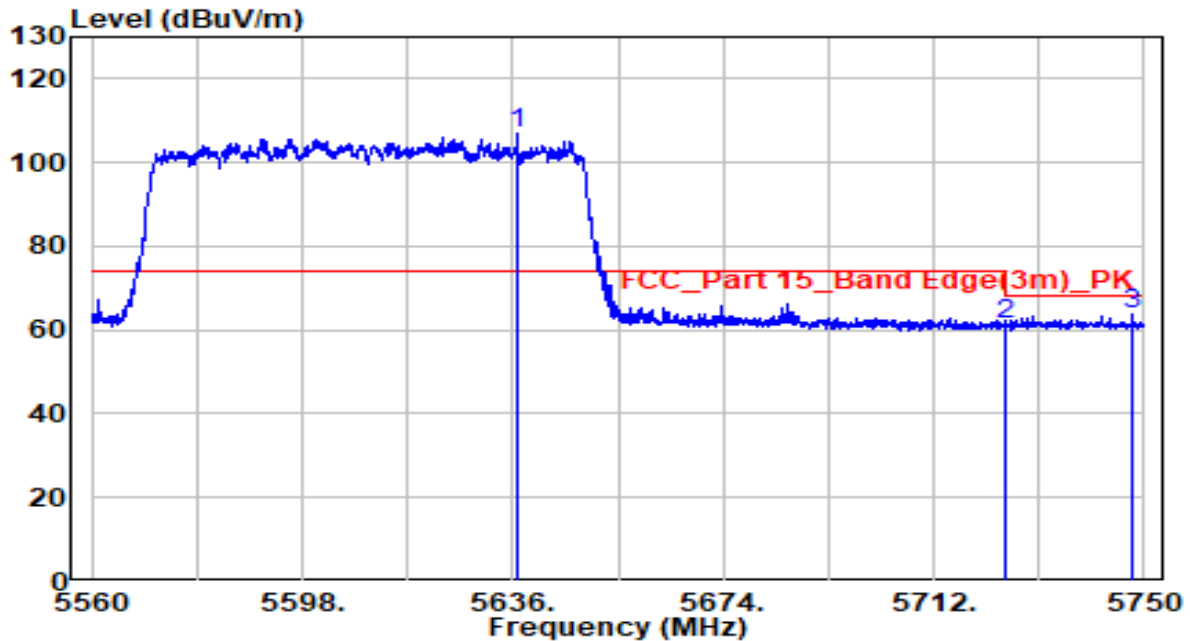


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5636.760	86.18	20.71	106.89	N/A	N/A	Peak
2		5725.000	40.45	21.00	61.45	-6.75	68.20	Peak
3		5748.005	42.63	21.07	63.71	-4.49	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax80 at channel 5610MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

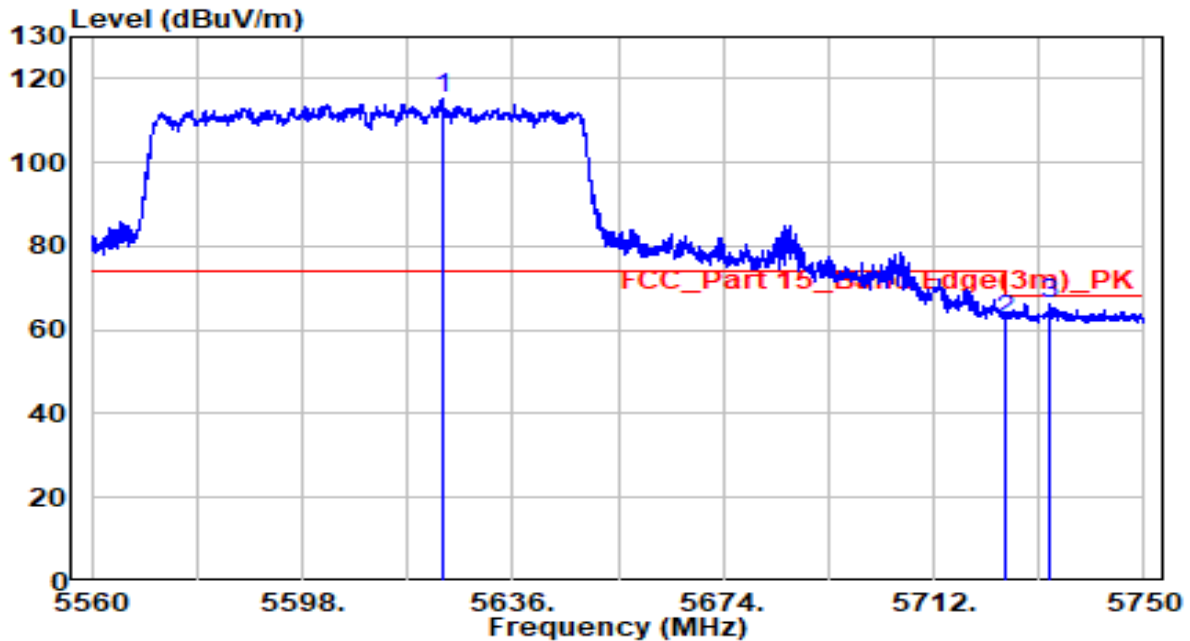


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5623.365	94.69	20.67	115.35	N/A	N/A	Peak
2		5725.000	41.52	21.00	62.52	-5.68	68.20	Peak
3		5732.805	45.39	21.02	66.41	-1.79	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax80 at channel 5775MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

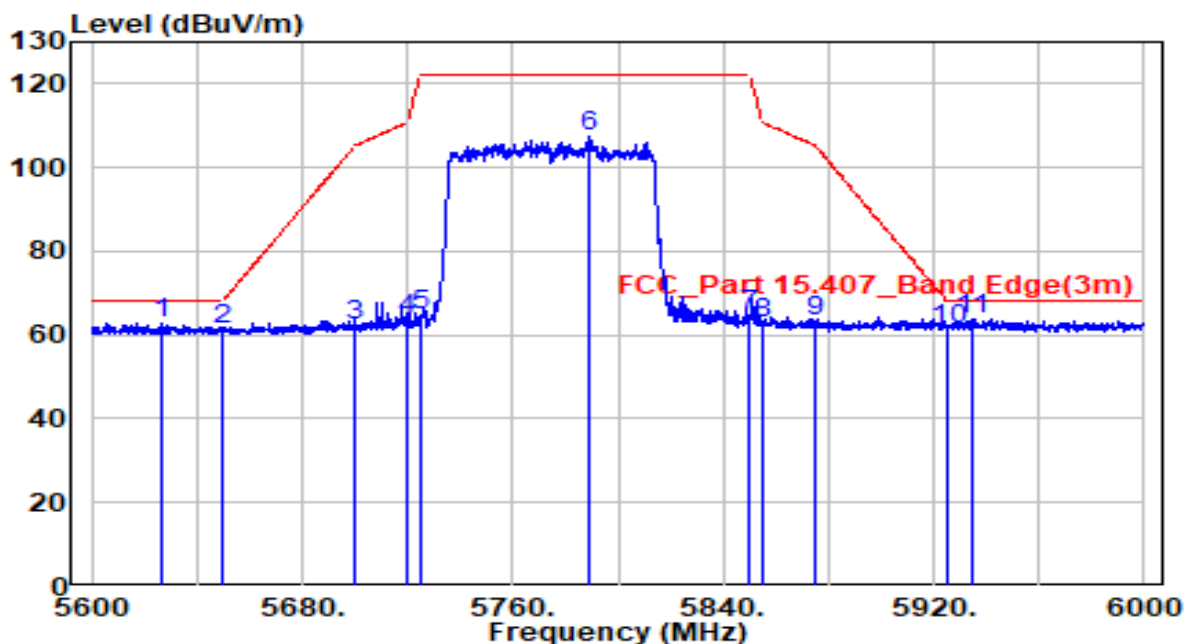

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5627.000	42.23	20.68	62.91	-5.29	68.20	Peak
2	5650.000	40.62	20.76	61.38	-6.82	68.20	Peak
3	5700.000	41.41	20.92	62.33	-42.87	105.20	Peak
4	5720.000	42.88	20.98	63.86	-46.94	110.80	Peak
5	5725.000	43.58	21.00	64.58	-57.62	122.20	Peak
6	5788.600	86.07	21.21	107.28	N/A	N/A	Peak
7	5850.000	43.28	21.40	64.69	-57.51	122.20	Peak
8	5855.000	41.18	21.42	62.60	-48.20	110.80	Peak
9	5875.000	41.72	21.49	63.21	-41.99	105.20	Peak
10	5925.000	39.82	21.65	61.47	-6.73	68.20	Peak
11	* 5934.800	42.22	21.68	63.90	-4.30	68.20	Peak

Note:


1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).

3. $\text{Measurement(dBuV/m)} = \text{Reading(dBuV)} + \text{C.F (Correction Factor)}$.

4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax80 at channel 5775MHz(CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

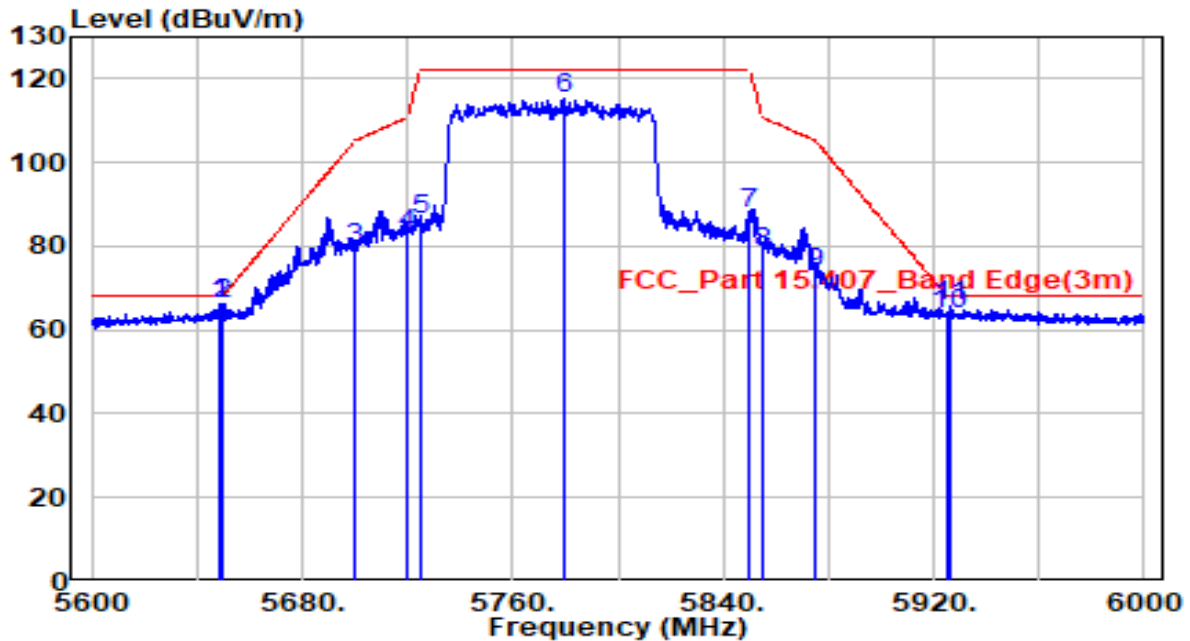

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5648.800	45.64	20.75	66.39	-1.81	68.20	Peak
2		5650.000	45.39	20.76	66.15	-2.05	68.20	Peak
3		5700.000	58.73	20.92	79.65	-25.55	105.20	Peak
4		5720.000	62.10	20.98	83.08	-27.72	110.80	Peak
5		5725.000	65.26	21.00	86.26	-35.94	122.20	Peak
6		5779.400	93.96	21.18	115.14	N/A	N/A	Peak
7		5850.000	66.36	21.40	87.76	-34.44	122.20	Peak
8		5855.000	57.28	21.42	78.70	-32.10	110.80	Peak
9		5875.000	52.02	21.49	73.50	-31.70	105.20	Peak
10		5925.000	41.88	21.65	63.53	-4.67	68.20	Peak
11		5925.800	43.96	21.65	65.61	-2.59	68.20	Peak

Note:


1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).

3. $\text{Measurement(dBuV/m)} = \text{Reading(dBuV)} + \text{C.F (Correction Factor)}$.

4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax160 at channel 5570MHz(CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

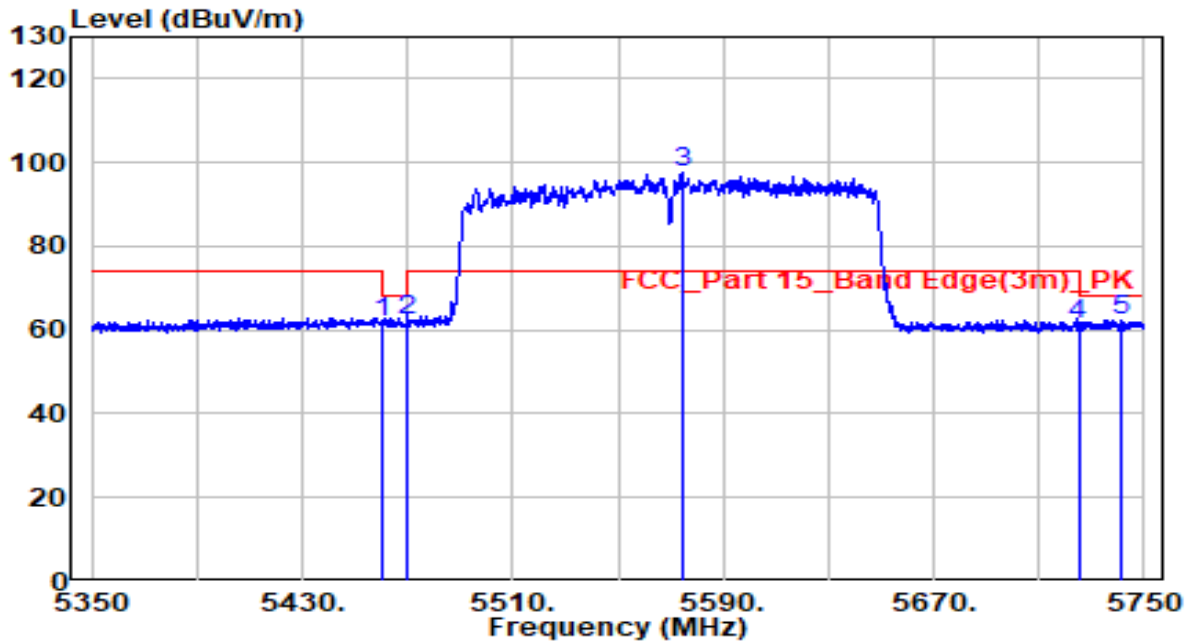


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	41.48	20.23	61.71	-6.49	68.20	Peak
2	5470.000	42.19	20.24	62.43	-5.77	68.20	Peak
3	* 5574.200	77.06	20.51	97.57	N/A	N/A	Peak
4	5725.000	40.37	21.00	61.37	-6.83	68.20	Peak
5	5741.200	41.48	21.05	62.53	-5.67	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax160 at channel 5570MHz(CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

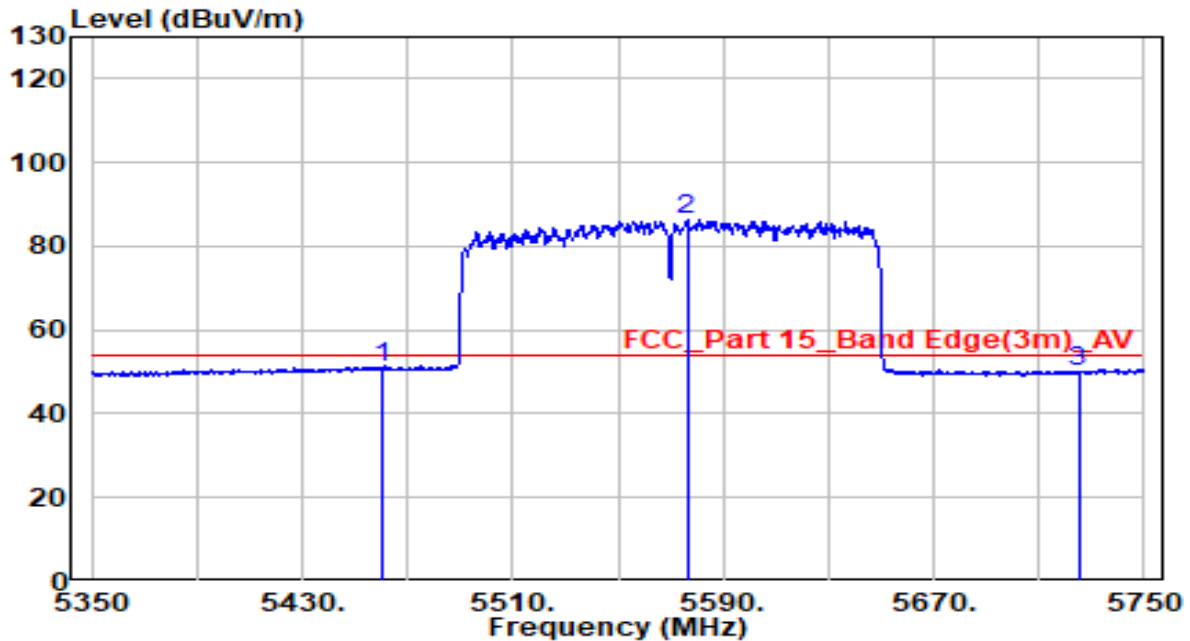


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	30.56	20.23	50.79	-3.21	54.00	Average
2	* 5576.200	65.81	20.52	86.33	N/A	N/A	Average
3	5725.000	28.97	21.00	49.97	-4.03	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax160 at channel 5570MHz(CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

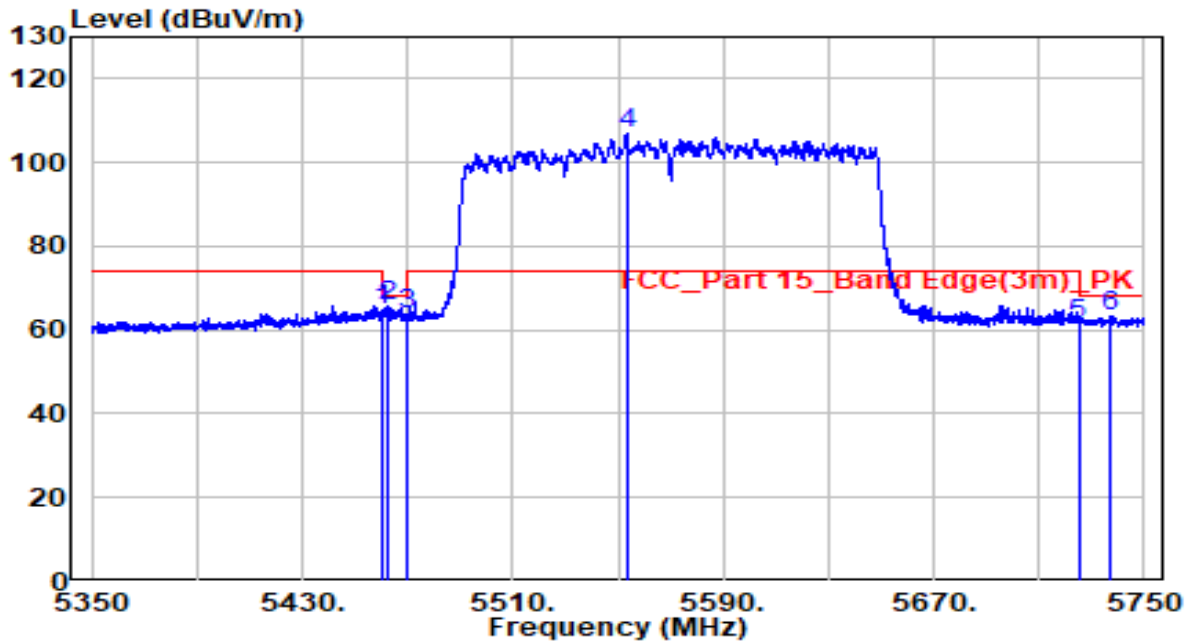


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	44.69	20.23	64.92	-3.28	68.20	Peak
2	5462.600	45.56	20.23	65.79	-2.41	68.20	Peak
3	5470.000	43.33	20.24	63.57	-4.63	68.20	Peak
4	* 5553.400	86.61	20.44	107.05	N/A	N/A	Peak
5	5725.000	40.55	21.00	61.55	-6.65	68.20	Peak
6	5736.800	42.37	21.04	63.41	-4.79	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	19.2°C/52.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax160 at channel 5570MHz (CDD Mode N _{SS} =1)	Test Voltage	120V/60Hz

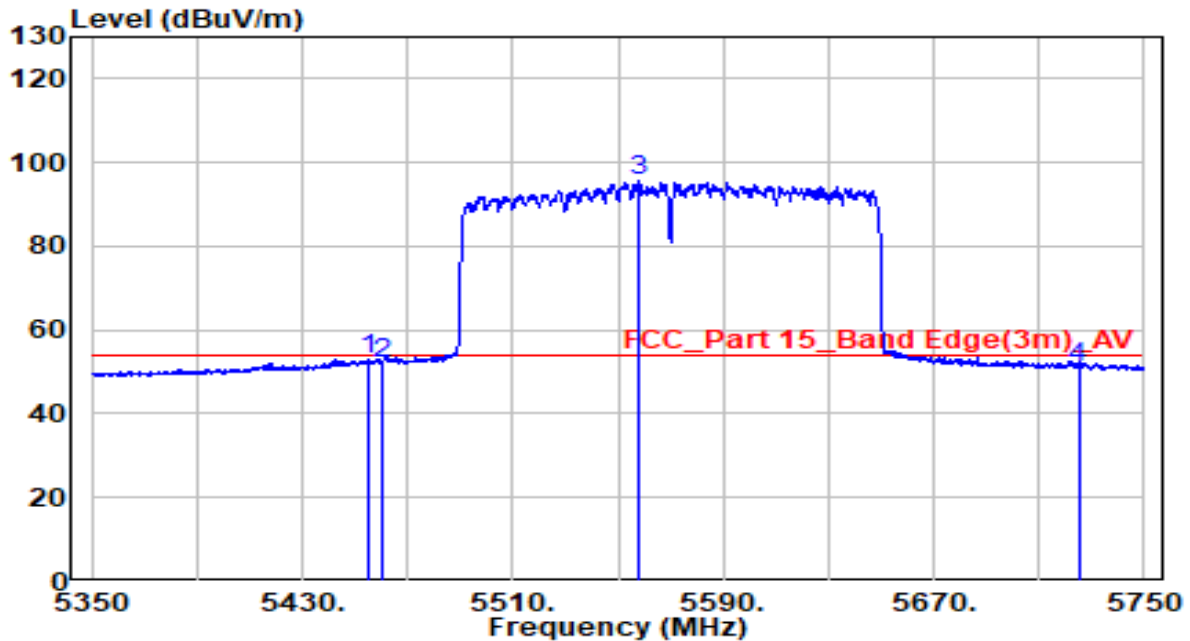


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5455.200	32.95	20.22	53.17	-0.83	54.00	Average
2	5460.000	31.88	20.23	52.11	-1.89	54.00	Average
3	* 5557.800	74.96	20.46	95.42	N/A	N/A	Average
4	5725.000	30.22	21.00	51.22	-2.78	54.00	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	21.5°C/57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5500 MHz(CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

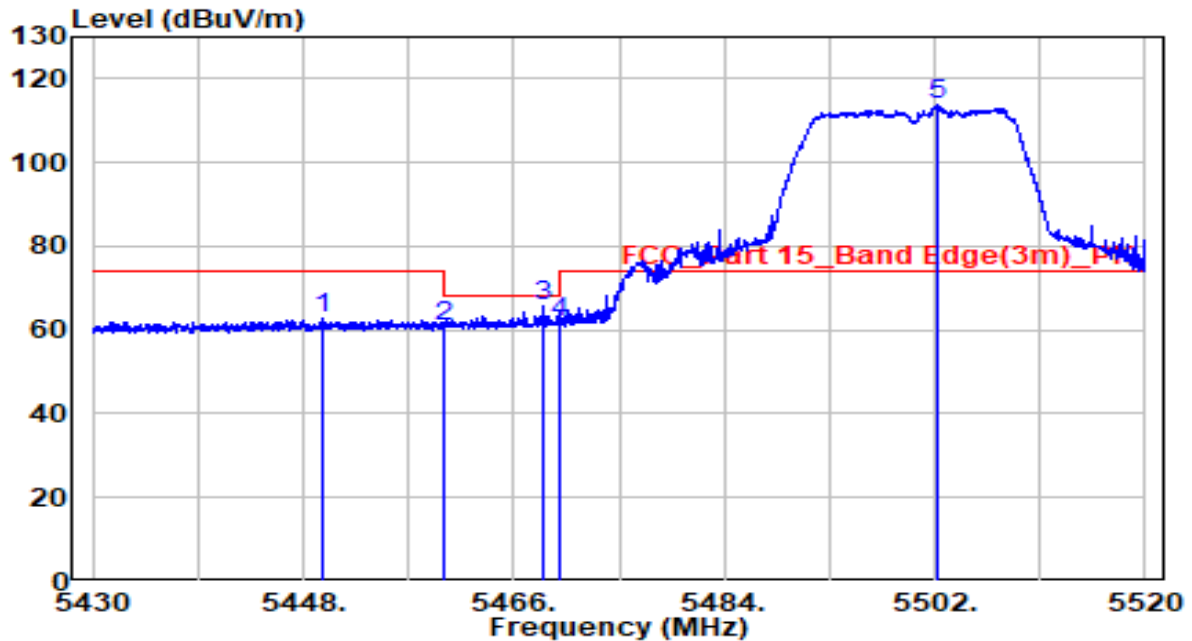


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5449.710	42.51	20.22	62.73	-11.27	74.00	Peak
2	5460.000	40.54	20.23	60.76	-7.44	68.20	Peak
3	5468.610	45.74	20.24	65.97	-2.23	68.20	Peak
4	5470.000	41.53	20.24	61.77	-6.43	68.20	Peak
5	* 5502.315	93.42	20.28	113.70	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	21.5°C/57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5500 MHz(CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

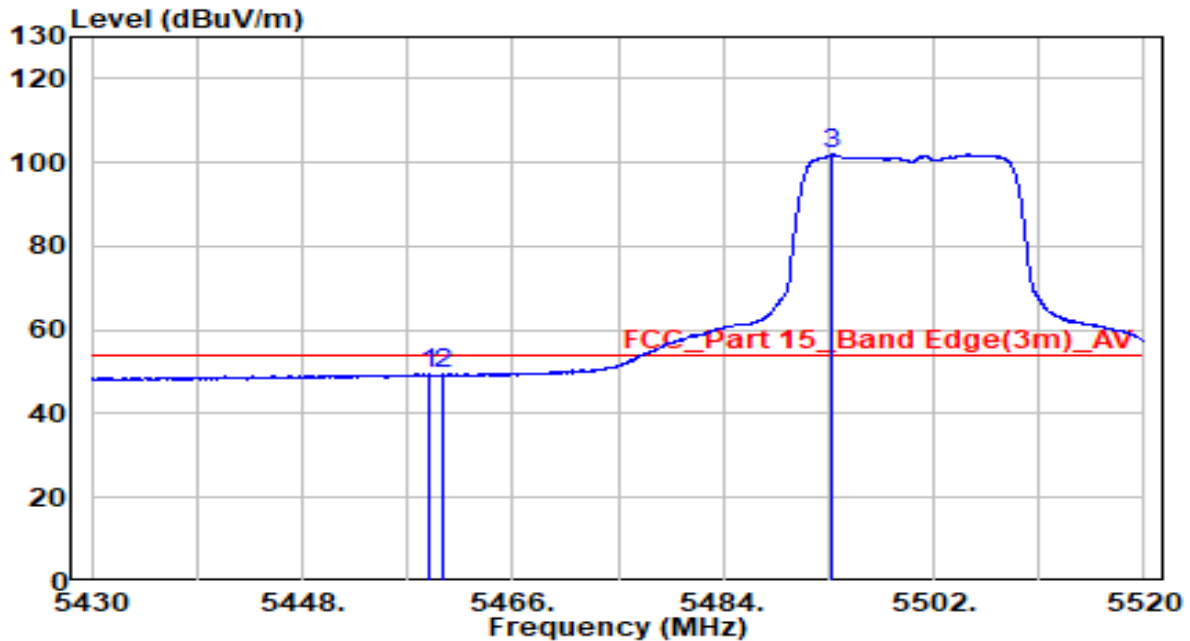


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.890	29.21	20.23	49.44	-4.56	54.00	Average
2	5460.000	29.12	20.23	49.35	-4.65	54.00	Average
3	* 5493.360	81.67	20.26	101.93	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	21.5°C/57%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5500 MHz(CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

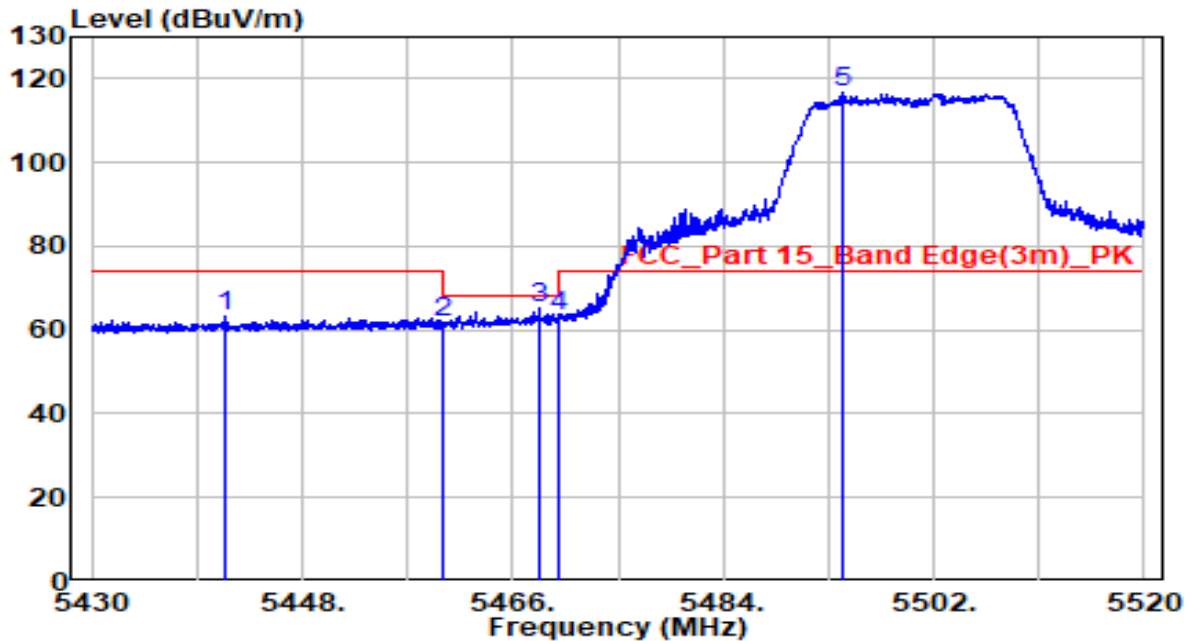


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5441.430	42.88	20.21	63.09	-10.91	74.00	Peak
2	5460.000	41.63	20.23	61.86	-6.34	68.20	Peak
3	5468.340	45.08	20.24	65.32	-2.88	68.20	Peak
4	5470.000	43.27	20.24	63.50	-4.70	68.20	Peak
5	* 5494.170	96.33	20.26	116.59	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	21.5°C/57%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5500 MHz(CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

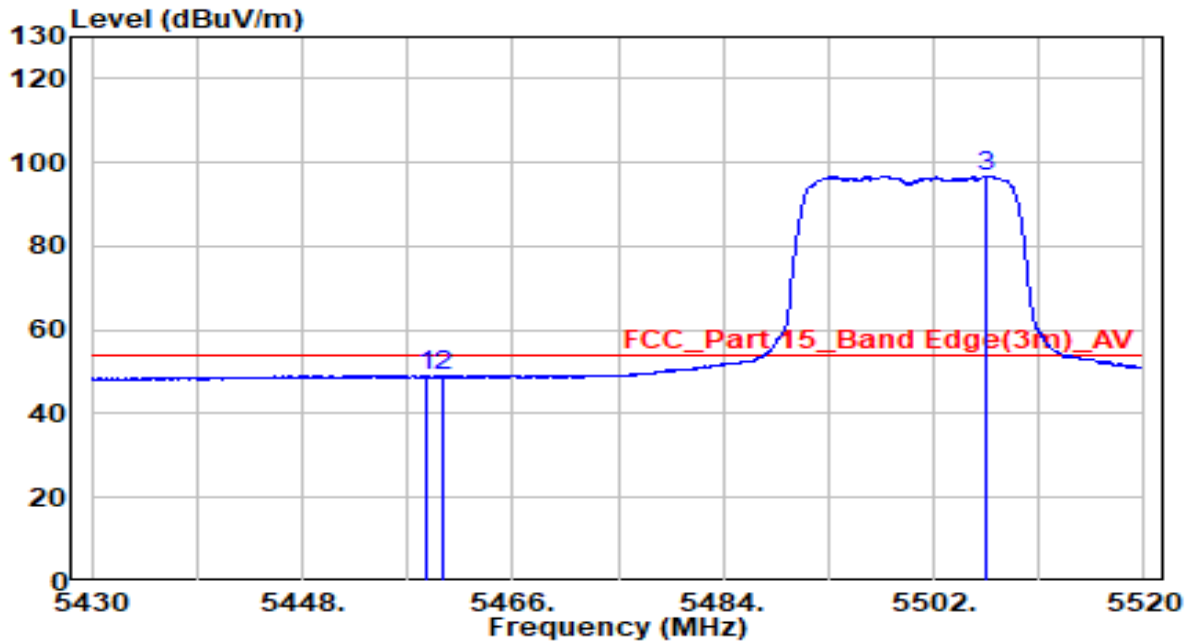


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.575	28.95	20.23	49.17	-4.83	54.00	Average
2	5460.000	28.77	20.23	49.00	-5.00	54.00	Average
3	* 5506.500	76.55	20.29	96.84	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	21.5°C/57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5700 MHz(CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

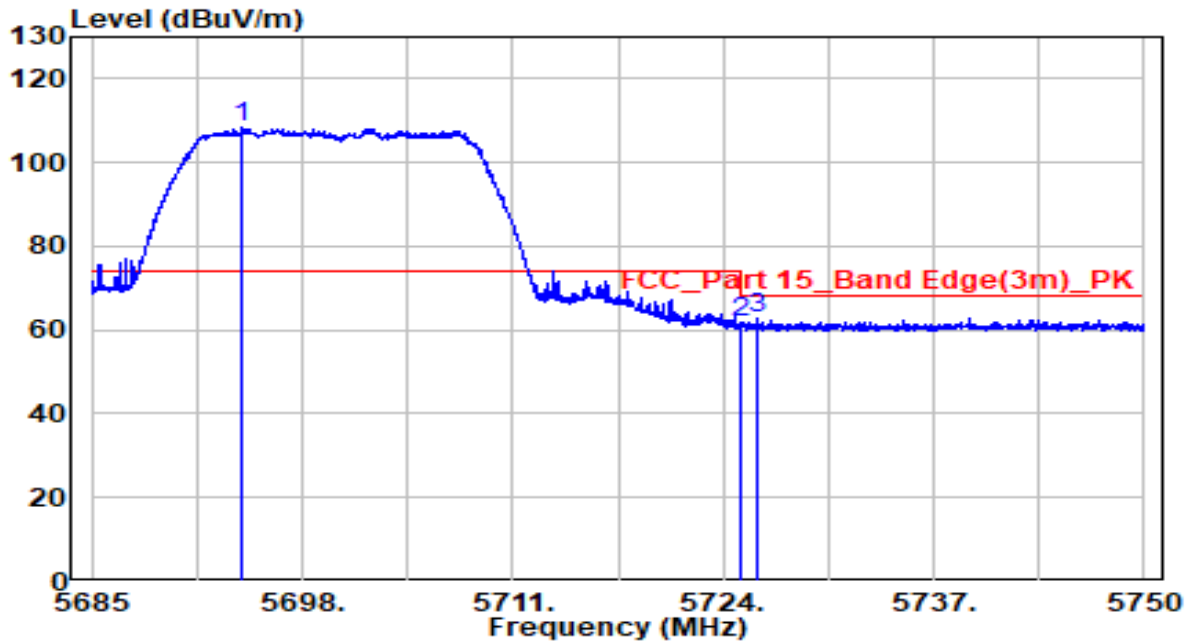


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5694.263	87.38	20.90	108.28	N/A	N/A	Peak
2		5725.000	40.97	21.00	61.97	-6.23	68.20	Peak
3		5726.080	42.03	21.00	63.03	-5.17	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	21.5°C/57%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5700 MHz(CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

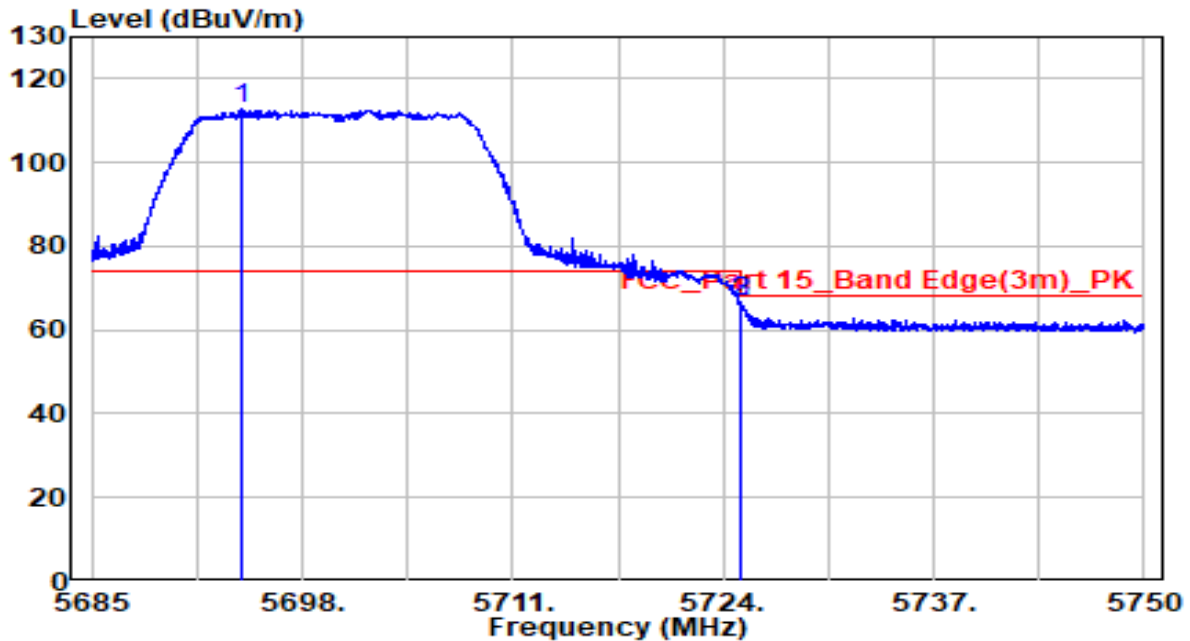


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5694.197	91.89	20.90	112.79	N/A	N/A	Peak
2		5725.000	45.76	21.00	66.76	-1.44	68.20	Peak
3		5725.072	45.89	21.00	66.89	-1.31	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	21.5°C/57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5510 MHz(CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

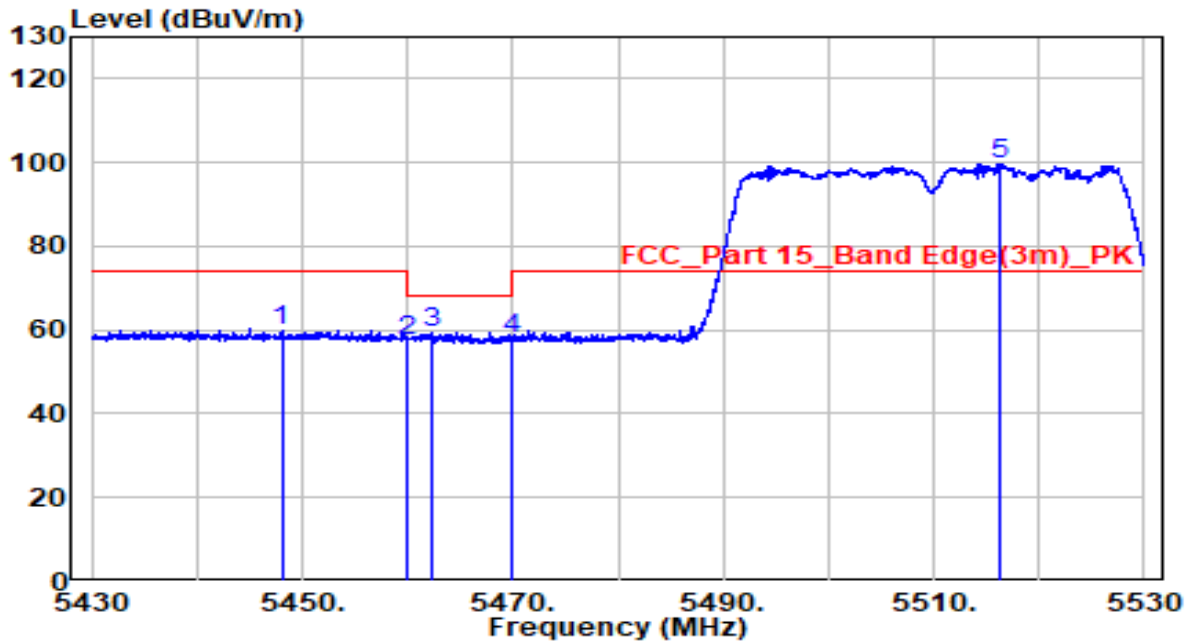


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5448.050	39.81	20.22	60.03	-13.97	74.00	Peak
2	5460.000	37.21	20.23	57.44	-10.76	68.20	Peak
3	5462.350	38.99	20.23	59.22	-8.98	68.20	Peak
4	5470.000	37.44	20.24	57.68	-10.52	68.20	Peak
5	* 5516.250	79.49	20.32	99.81	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	21.5°C/57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5510 MHz(CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

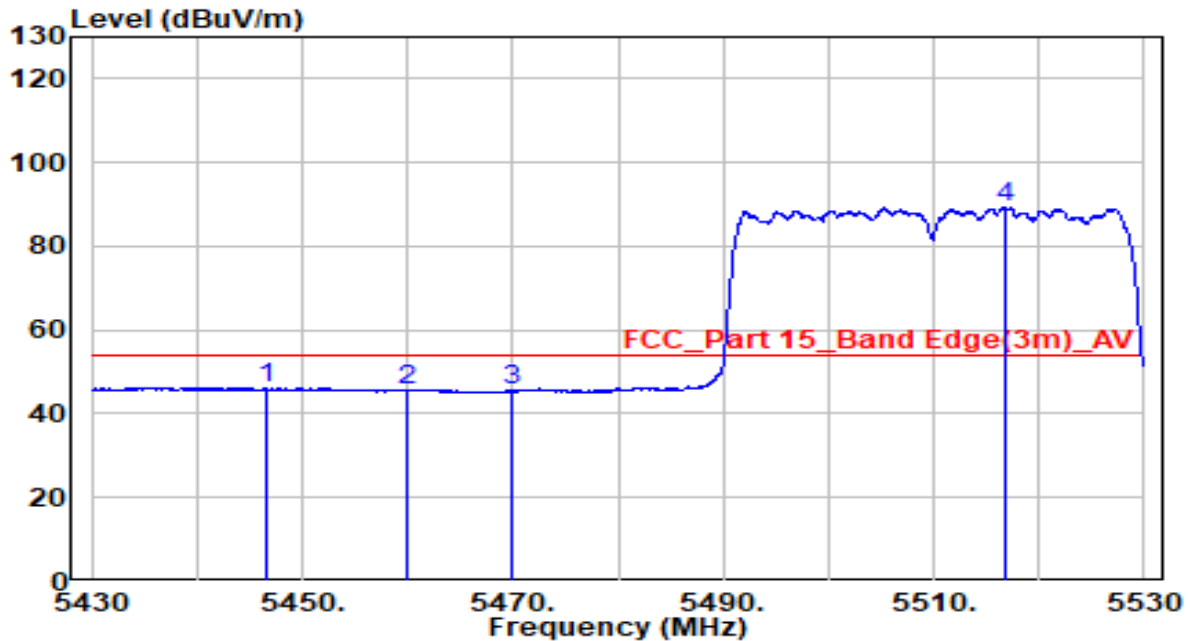


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5446.500	25.78	20.21	46.00	-8.00	54.00	Average
2	5460.000	25.26	20.23	45.48	-8.52	54.00	Average
3	5470.000	25.16	20.24	45.40	-8.60	54.00	Average
4	* 5516.750	68.83	20.32	89.15	N/A	N/A	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	21.5°C/57%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5510 MHz(CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

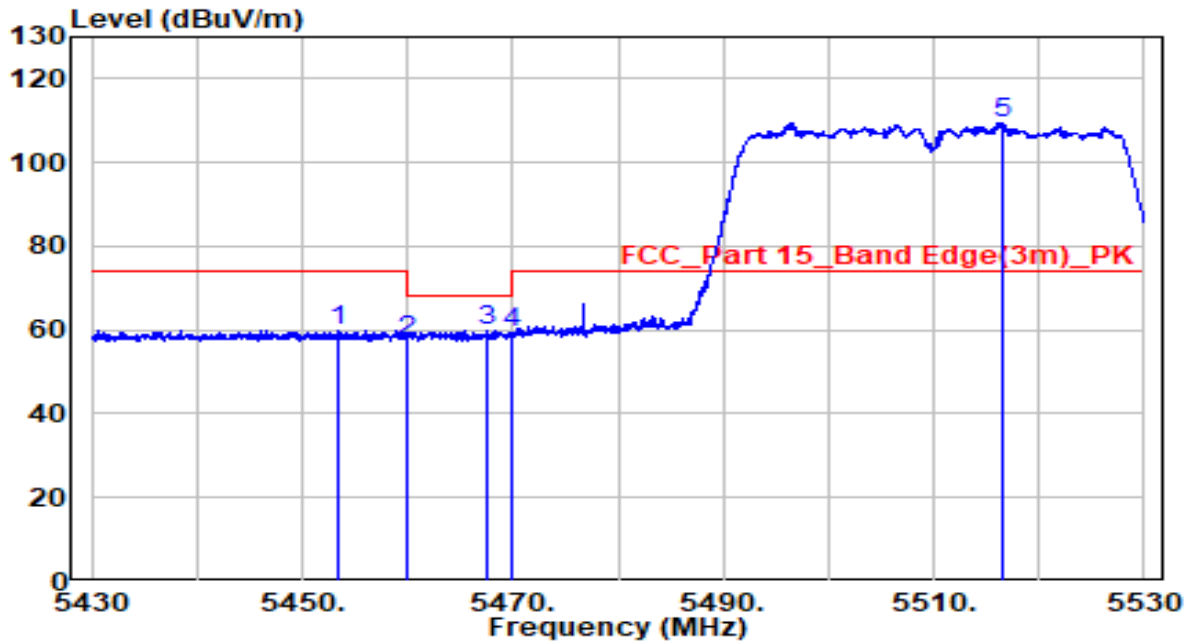


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5453.400	39.78	20.22	60.01	-13.99	74.00	Peak
2	5460.000	37.20	20.23	57.43	-10.77	68.20	Peak
3	5467.500	39.73	20.24	59.96	-8.24	68.20	Peak
4	5470.000	39.25	20.24	59.49	-8.71	68.20	Peak
5	* 5516.500	89.31	20.32	109.64	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	21.5°C/57%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5510 MHz(CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

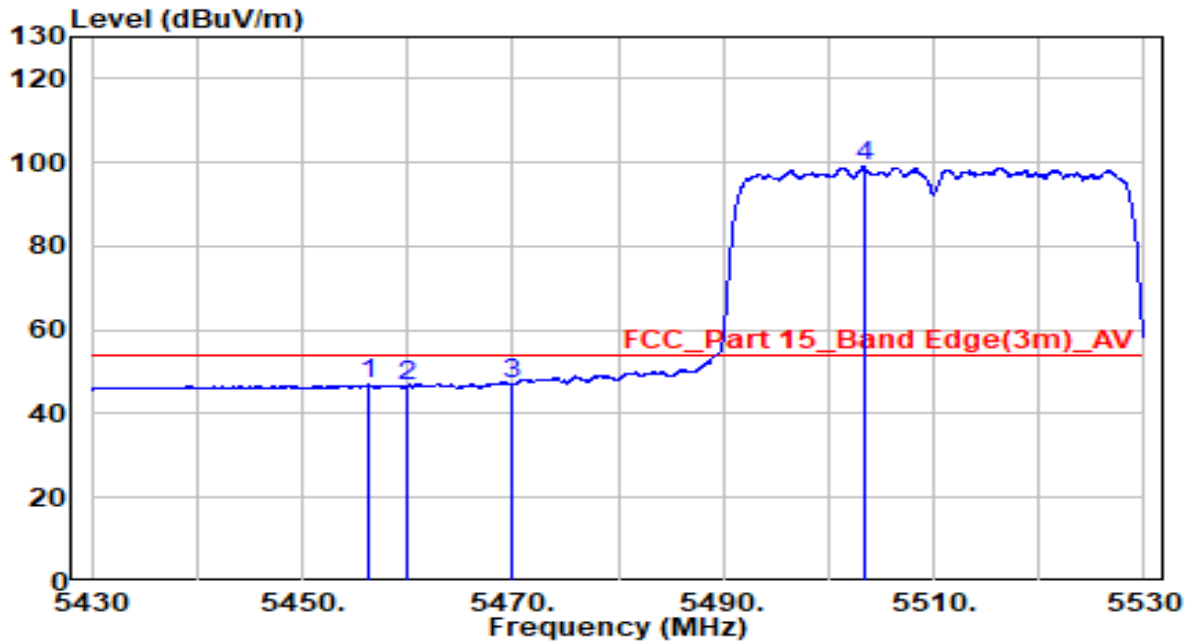


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5456.400	26.64	20.22	46.86	-7.14	54.00	Average
2	5460.000	26.17	20.23	46.40	-7.60	54.00	Average
3	5470.000	26.76	20.24	47.00	-7.00	54.00	Average
4	* 5503.400	78.74	20.28	99.03	N/A	N/A	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	21.5°C/57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5670 MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

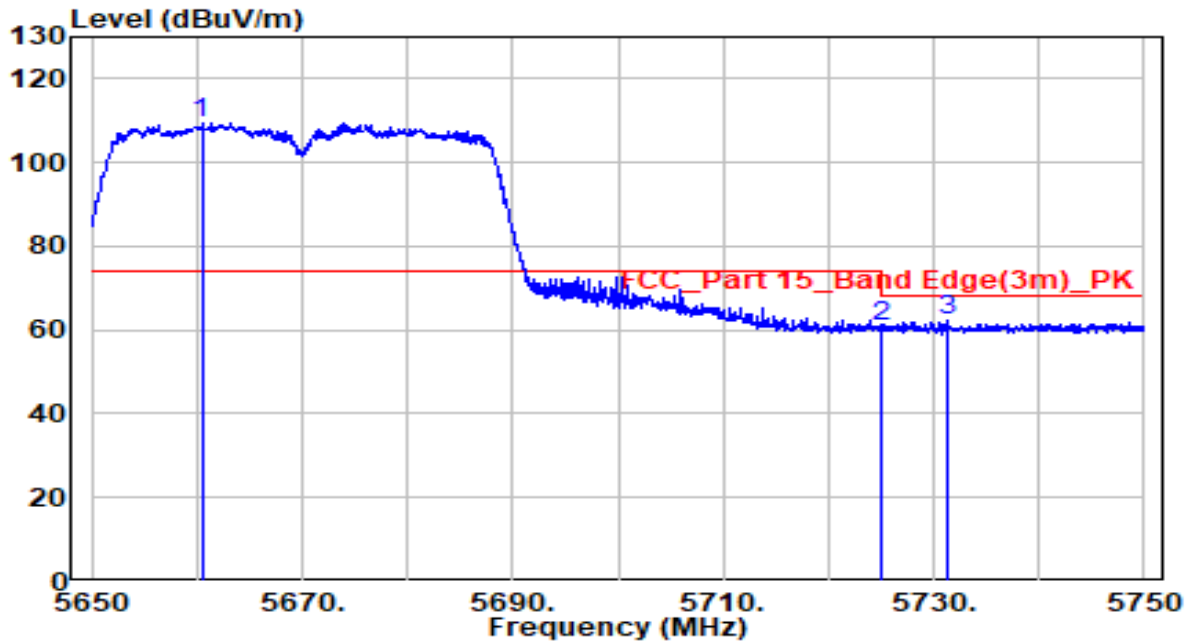


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5660.450	88.75	20.79	109.54	N/A	N/A	Peak
2		5725.000	39.88	21.00	60.88	-7.32	68.20	Peak
3		5731.350	41.06	21.02	62.08	-6.12	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	21.5°C/57%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5670 MHz(CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

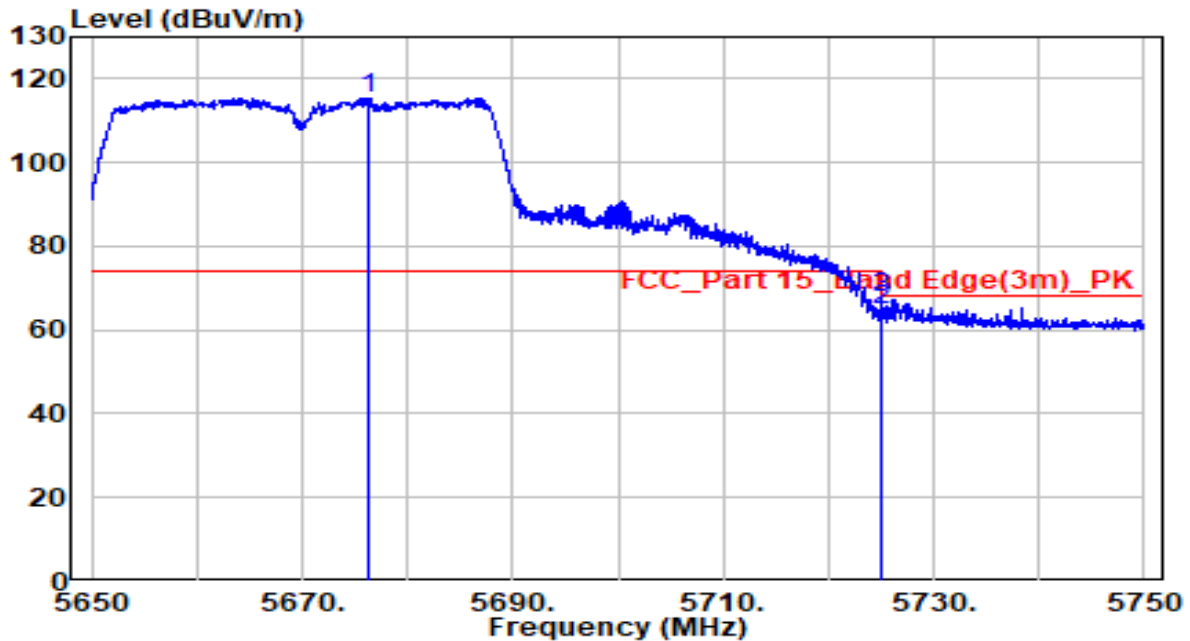


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5676.200	94.62	20.84	115.46	N/A	N/A	Peak
2		5725.000	43.97	21.00	64.97	-3.23	68.20	Peak
3		5725.100	46.63	21.00	67.63	-0.57	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	21.5°C/57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5530 MHz(CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

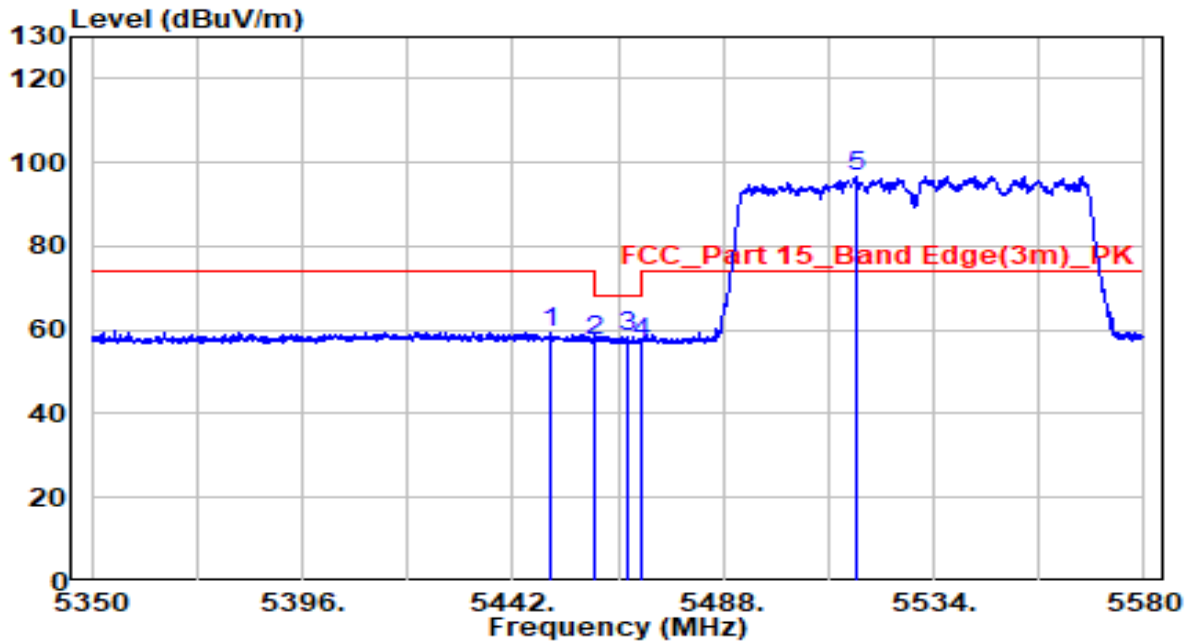


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5450.050	39.28	20.22	59.50	-14.50	74.00	Peak
2	5460.000	37.30	20.23	57.53	-10.67	68.20	Peak
3	5466.840	38.29	20.24	58.53	-9.67	68.20	Peak
4	5470.000	36.81	20.24	57.05	-11.15	68.20	Peak
5	* 5516.980	76.38	20.33	96.71	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	21.5°C/57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5530 MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

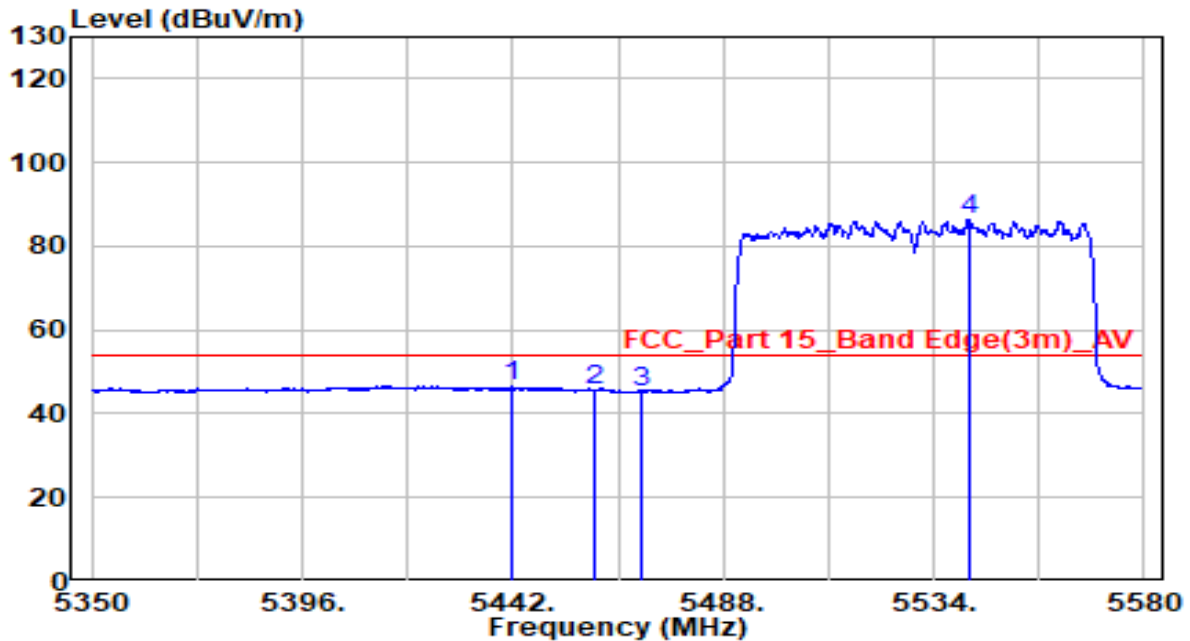


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5442.000	26.19	20.21	46.40	-7.60	54.00	Average
2	5460.000	25.27	20.23	45.50	-8.50	54.00	Average
3	5470.000	25.08	20.24	45.32	-8.68	54.00	Average
4	* 5541.590	65.88	20.40	86.29	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	21.5°C/57%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5530 MHz(CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

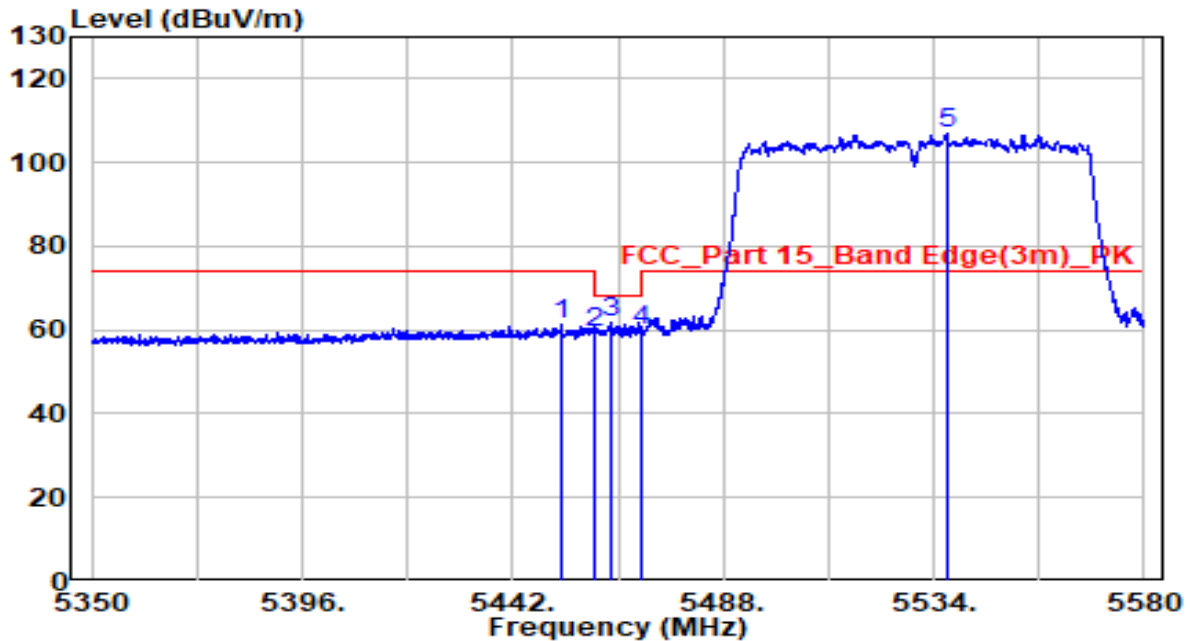


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5452.580	40.91	20.22	61.13	-12.87	74.00	Peak
2	5460.000	39.07	20.23	59.30	-8.90	68.20	Peak
3	5463.275	41.47	20.23	61.70	-6.50	68.20	Peak
4	5470.000	39.44	20.24	59.68	-8.52	68.20	Peak
5	* 5536.760	86.38	20.39	106.76	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	21.5°C/57%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT80 at channel 5530 MHz(CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

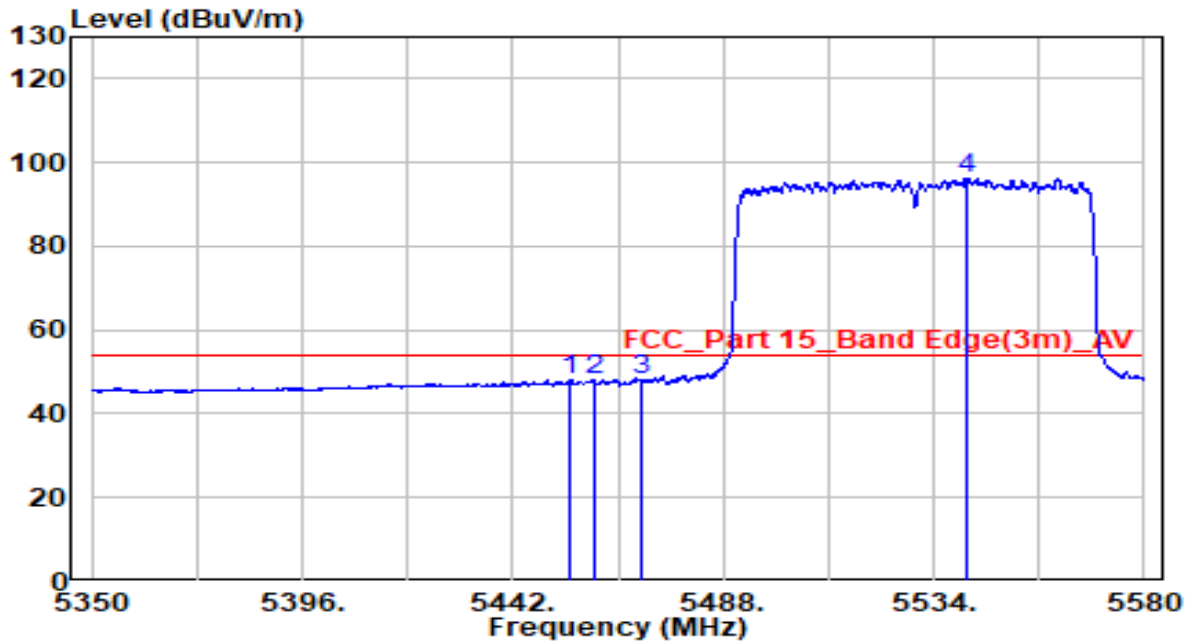


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5454.650	28.08	20.22	48.31	-5.69	54.00	Average
2	5460.000	27.66	20.23	47.88	-6.12	54.00	Average
3	5470.000	27.64	20.24	47.88	-6.12	54.00	Average
4	* 5541.360	75.88	20.40	96.29	N/A	N/A	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	21.5°C/57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5610 MHz (CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

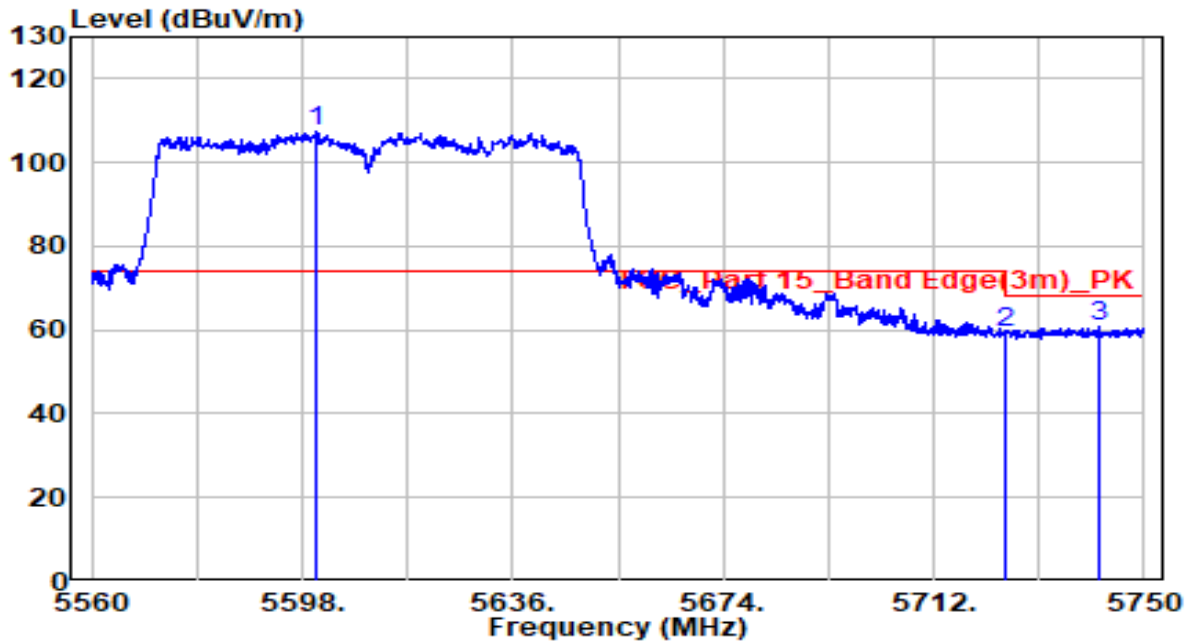


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5600.660	86.68	20.60	107.28	N/A	N/A	Peak
2		5725.000	38.45	21.00	59.44	-8.76	68.20	Peak
3		5741.640	39.87	21.05	60.93	-7.27	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	21.5°C/57%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5610 MHz(CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

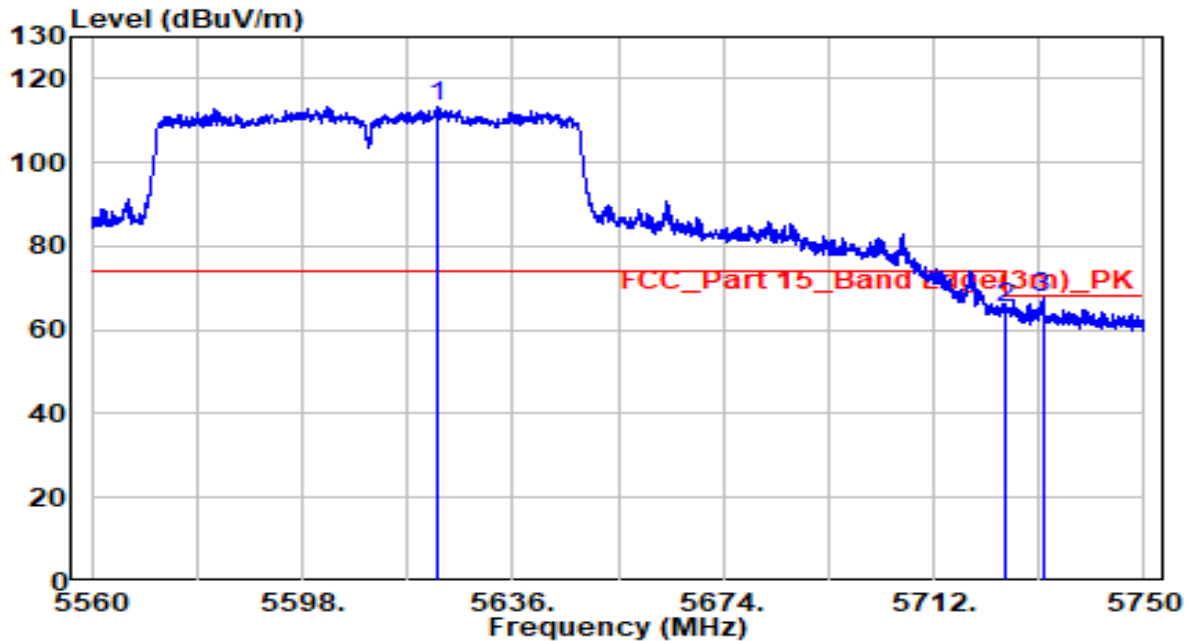


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5622.320	92.78	20.67	113.45	N/A	N/A	Peak
2		5725.000	44.21	21.00	65.21	-2.99	68.20	Peak
3		5731.665	46.75	21.02	67.77	-0.43	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	21.5°C/57%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT160 at channel 5570 MHz(CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

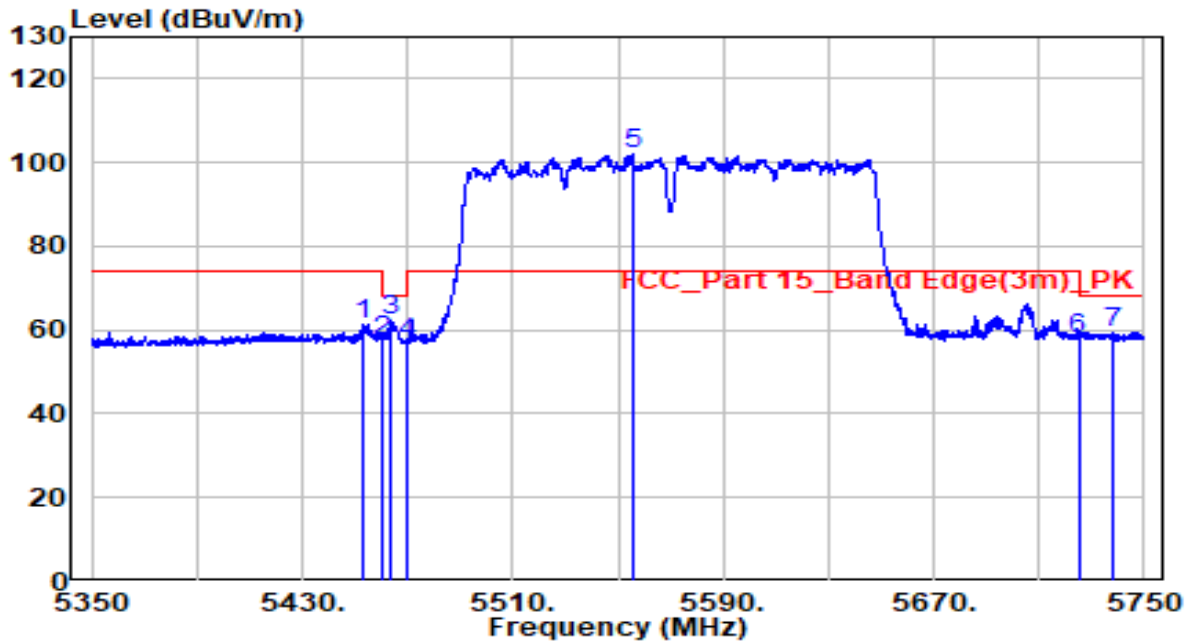


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5452.600	41.12	20.22	61.34	-12.66	74.00	Peak
2	5460.000	37.17	20.23	57.40	-10.80	68.20	Peak
3	5464.000	41.94	20.23	62.18	-6.02	68.20	Peak
4	5470.000	36.82	20.24	57.06	-11.14	68.20	Peak
5	* 5555.600	81.40	20.45	101.85	N/A	N/A	Peak
6	5725.000	36.87	21.00	57.87	-10.33	68.20	Peak
7	5737.800	38.54	21.04	59.58	-8.62	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	21.5°C/57%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT160 at channel 5570 MHz(CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

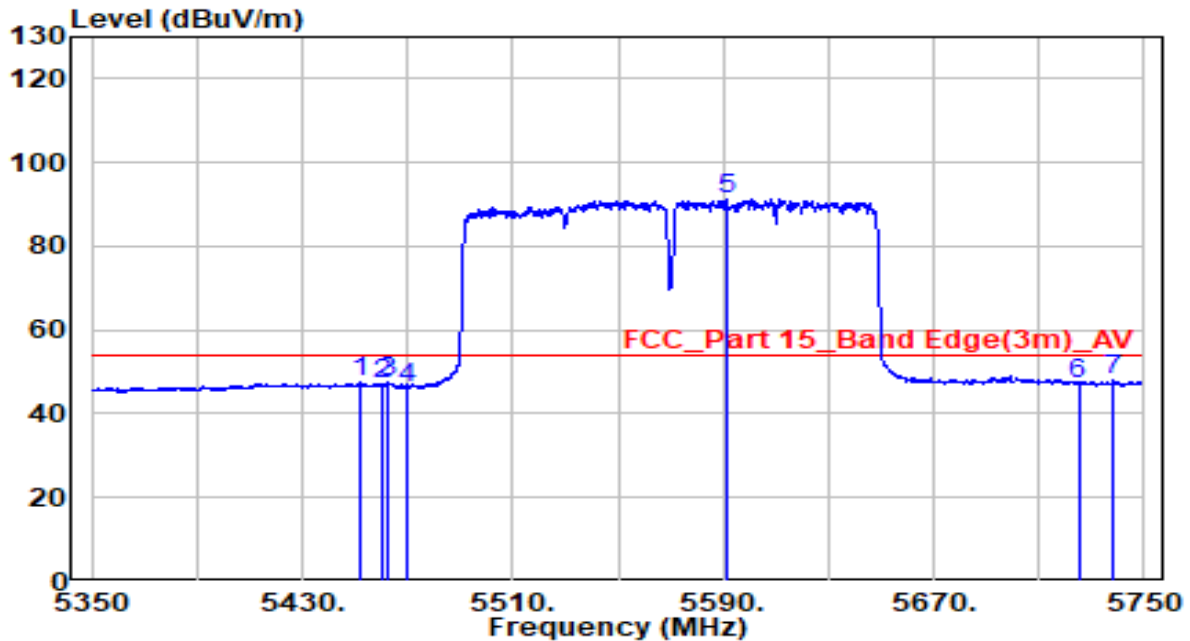


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5452.400	27.15	20.22	47.37	-6.63	54.00	Average
2	5460.000	26.74	20.23	46.97	-7.03	54.00	Average
3	5462.400	27.15	20.23	47.38	-6.62	54.00	Average
4	5470.000	26.11	20.24	46.35	-7.65	54.00	Average
5	* 5591.000	70.90	20.56	91.47	N/A	N/A	Average
6	5725.000	26.19	21.00	47.19	-6.81	54.00	Average
7	5738.000	26.82	21.04	47.86	-6.14	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	21.5°C/57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT160 at channel 5570 MHz(CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

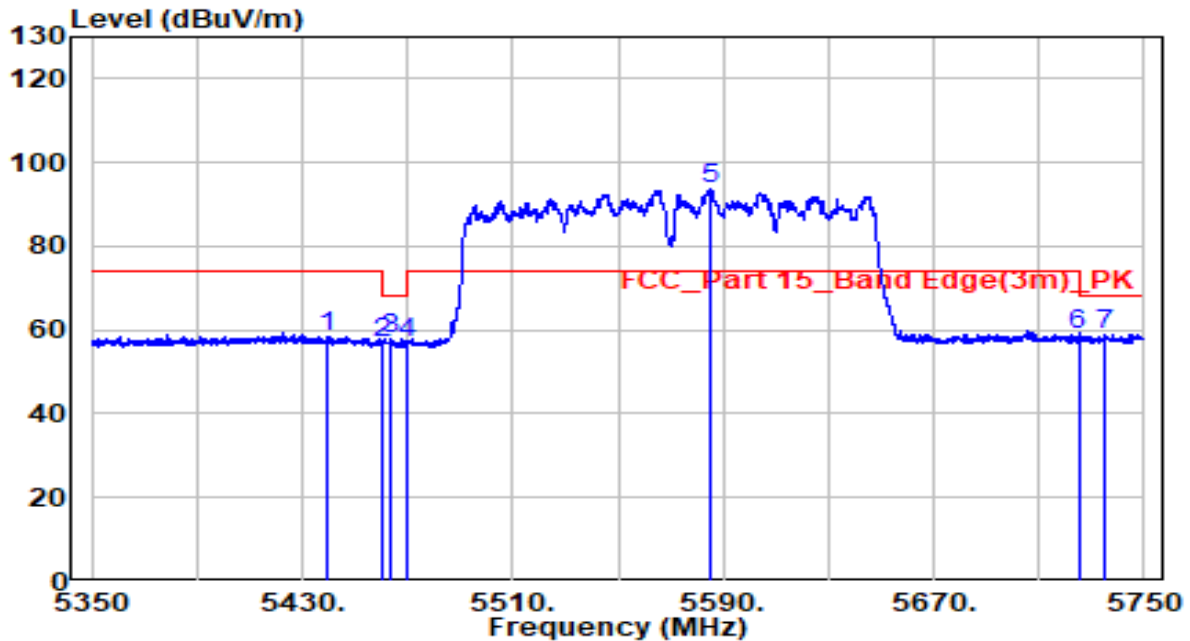


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5439.600	38.20	20.21	58.41	-15.59	74.00	Peak
2	5460.000	36.62	20.23	56.85	-11.35	68.20	Peak
3	5463.800	37.76	20.23	57.99	-10.21	68.20	Peak
4	5470.000	36.48	20.24	56.72	-11.48	68.20	Peak
5	* 5585.200	73.16	20.55	93.71	N/A	N/A	Peak
6	5725.000	38.00	21.00	59.00	-9.20	68.20	Peak
7	5735.400	37.85	21.03	58.88	-9.32	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	21.5°C/57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT160 at channel 5570 MHz(CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

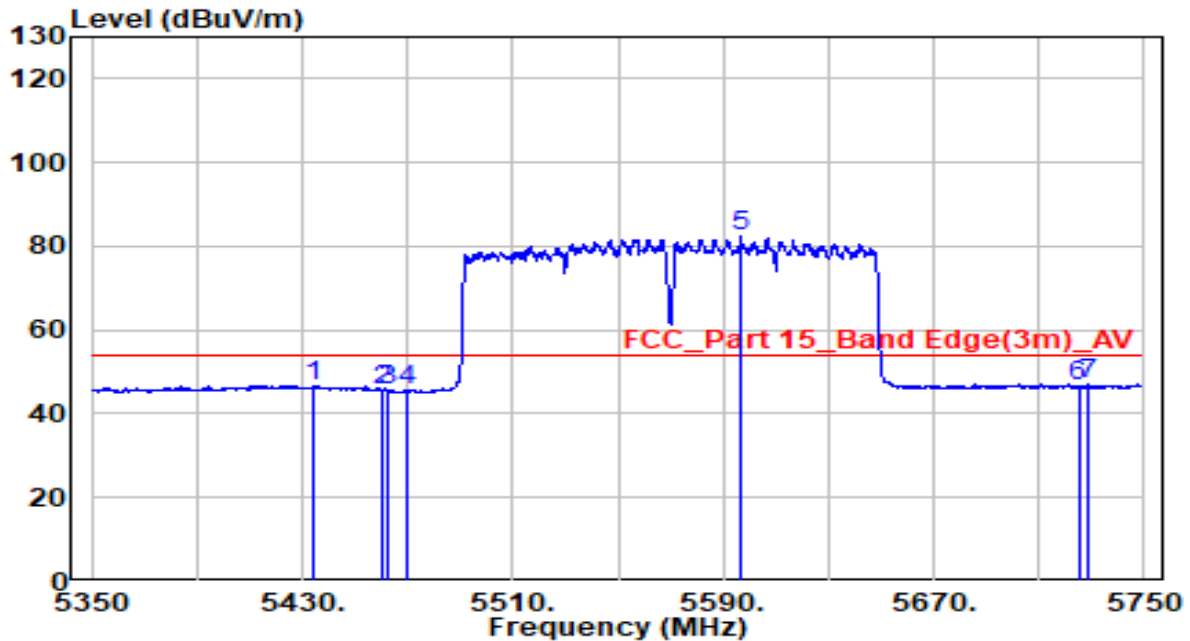


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5434.000	26.62	20.20	46.82	-7.18	54.00	Average
2	5460.000	25.44	20.23	45.67	-8.33	54.00	Average
3	5462.400	25.52	20.23	45.75	-8.25	54.00	Average
4	5470.000	25.31	20.24	45.55	-8.45	54.00	Average
5 *	5596.800	61.60	20.58	82.18	N/A	N/A	Average
6	5725.000	25.41	21.00	46.41	-7.59	54.00	Average
7	5728.600	25.93	21.01	46.94	-7.06	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.2°C/49.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500 MHz(CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

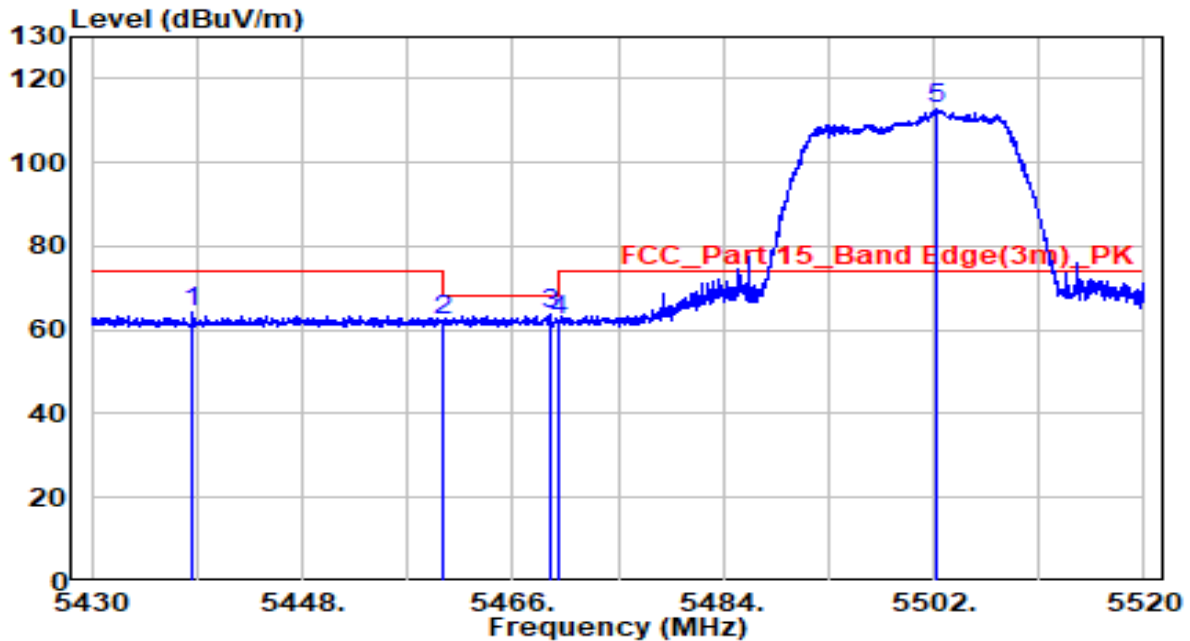


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5438.640	44.18	20.21	64.39	-9.61	74.00	Peak
2	5460.000	42.25	20.23	62.48	-5.72	68.20	Peak
3	5469.240	43.46	20.24	63.70	-4.50	68.20	Peak
4	5470.000	41.88	20.24	62.12	-6.08	68.20	Peak
5	* 5502.225	92.36	20.28	112.64	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.2°C/49.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500 MHz(CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

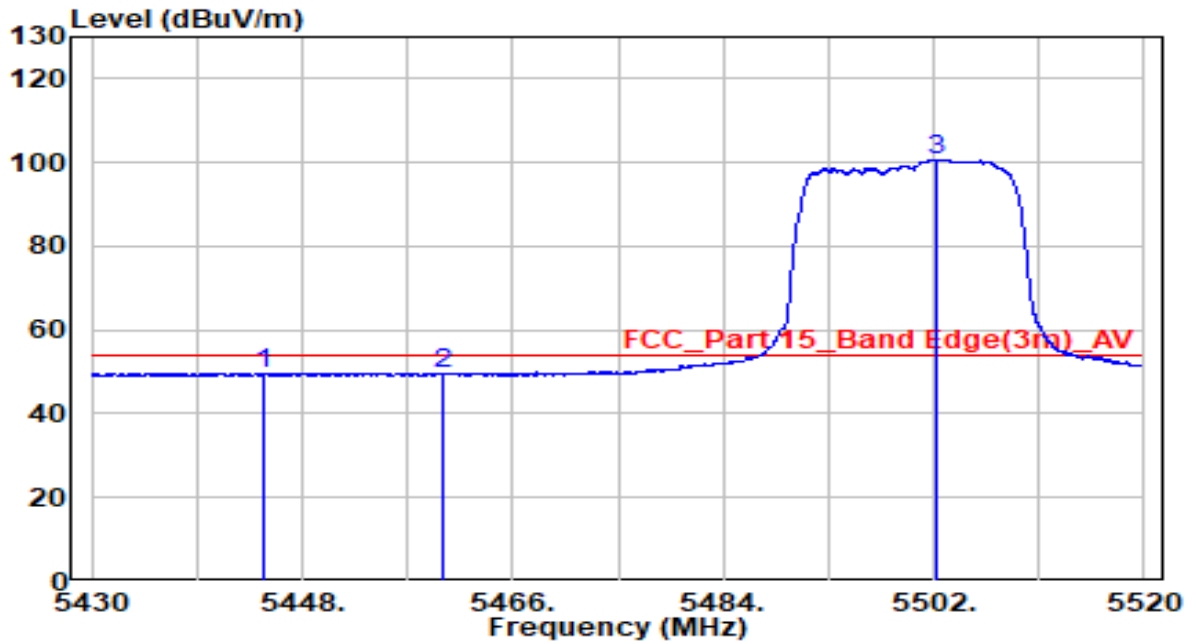


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5444.670	29.56	20.21	49.77	-4.23	54.00	Average
2	5460.000	29.12	20.23	49.35	-4.65	54.00	Average
3	* 5502.180	80.35	20.28	100.63	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.2°C/49.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500 MHz(CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

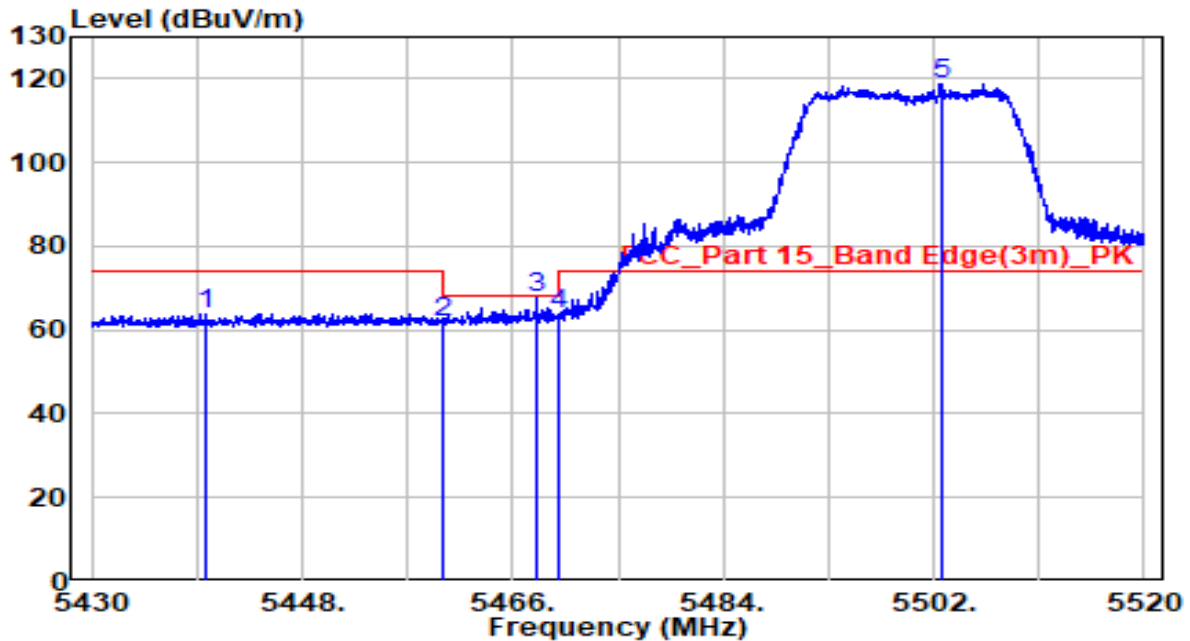


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5439.855	43.65	20.21	63.86	-10.14	74.00	Peak
2	5460.000	41.68	20.23	61.91	-6.29	68.20	Peak
3	5468.070	47.31	20.24	67.55	-0.65	68.20	Peak
4	5470.000	43.58	20.24	63.82	-4.38	68.20	Peak
5	* 5502.630	98.58	20.28	118.85	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.2°C/49.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500 MHz(CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

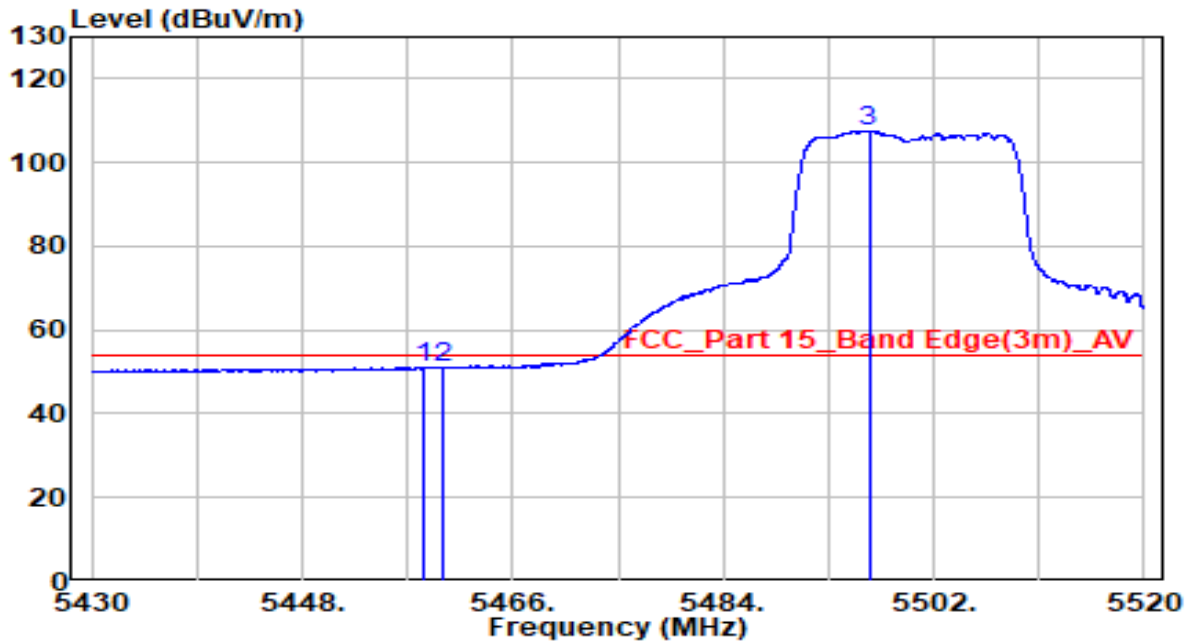


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.440	30.94	20.23	51.16	-2.84	54.00	Average
2	5460.000	30.74	20.23	50.97	-3.03	54.00	Average
3	* 5496.465	87.06	20.27	107.32	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.2°C/49.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at Channel 5700 MHz(CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

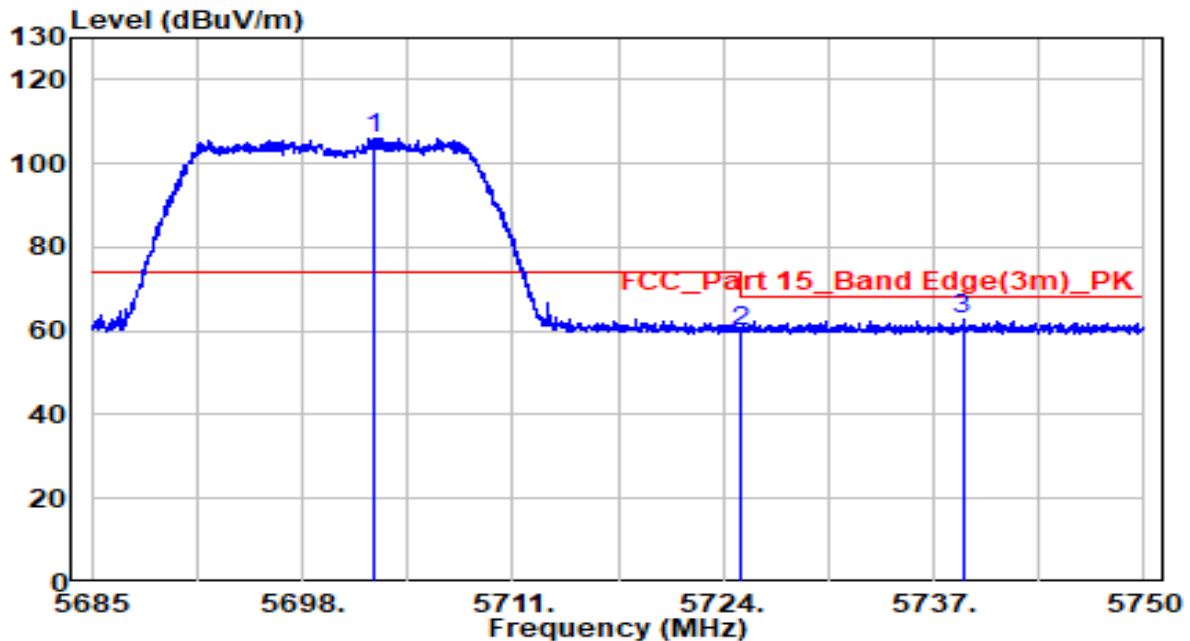


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5702.355	85.24	20.93	106.16	N/A	N/A	Peak
2		5725.000	38.95	21.00	59.95	-8.25	68.20	Peak
3		5738.788	41.61	21.04	62.65	-5.55	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.2°C/49.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE20 at Channel 5700 MHz(CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

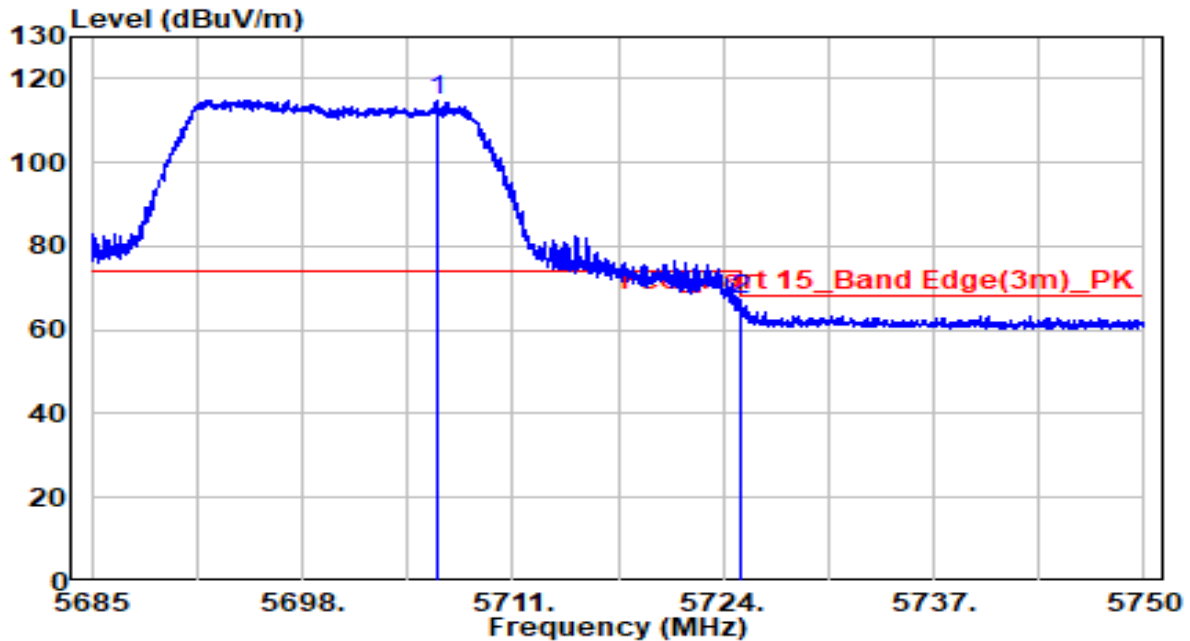


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5706.385	93.97	20.94	114.91	N/A	N/A	Peak
2		5725.007	45.99	21.00	66.99	-1.21	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	21.5°C/57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5510 MHz(CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

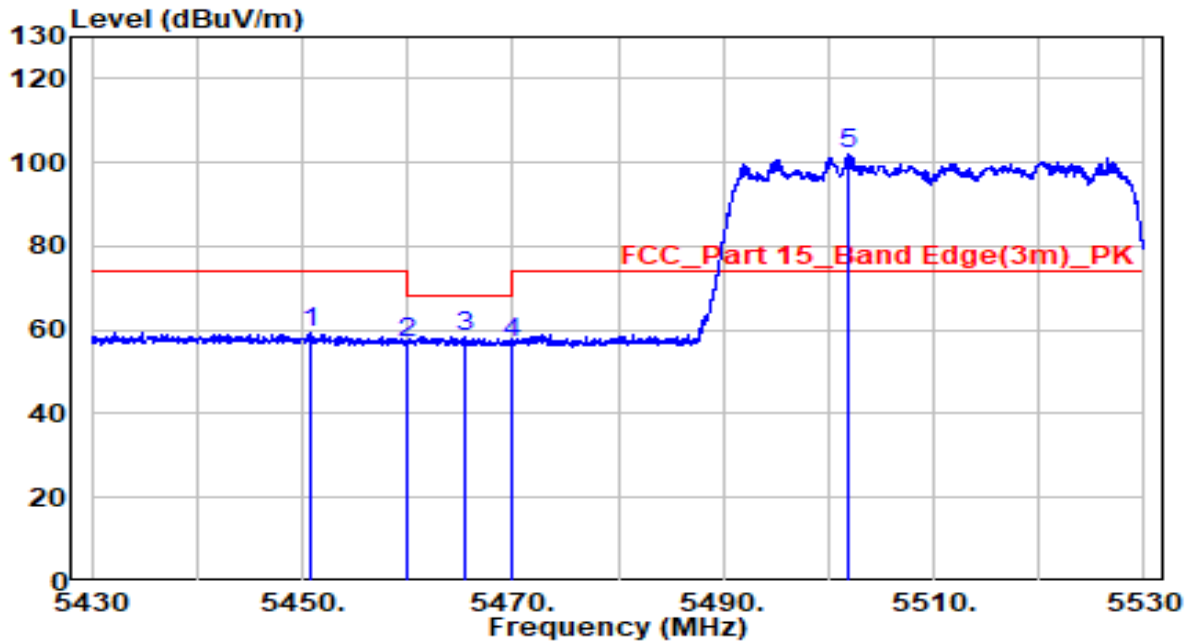


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5450.800	39.07	20.22	59.28	-14.72	74.00	Peak
2	5460.000	36.71	20.23	56.94	-11.26	68.20	Peak
3	5465.400	38.20	20.23	58.44	-9.76	68.20	Peak
4	5470.000	36.84	20.24	57.08	-11.12	68.20	Peak
5	* 5501.900	81.54	20.28	101.82	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	21.5°C/57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5510 MHz(CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

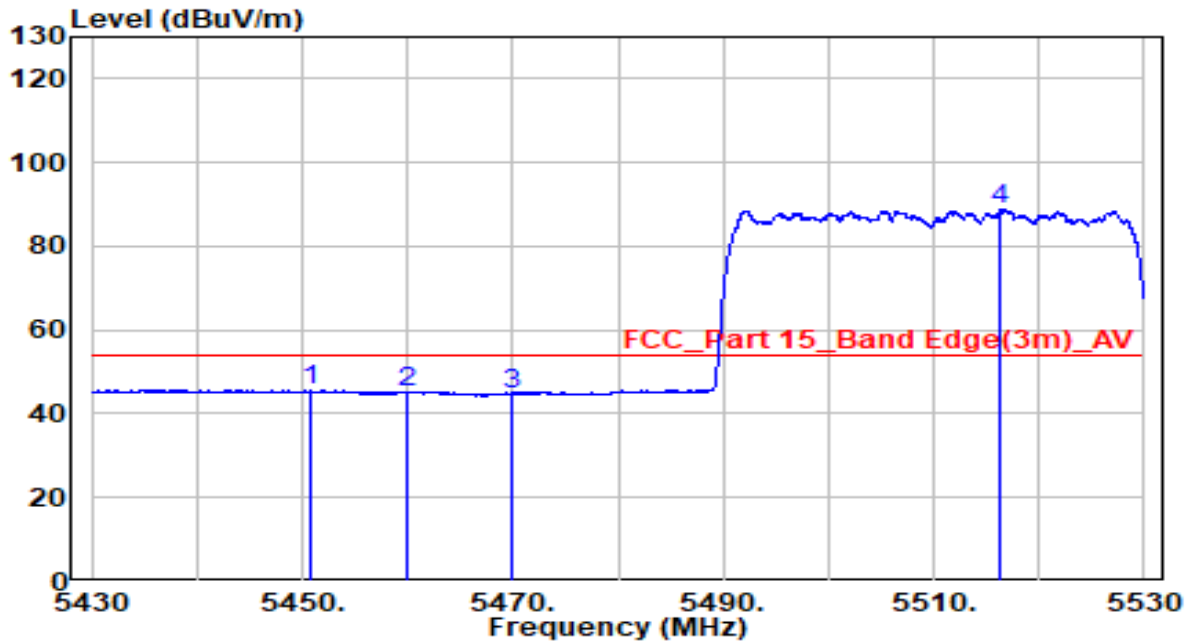


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5450.750	25.33	20.22	45.55	-8.45	54.00	Average
2	5460.000	24.77	20.23	45.00	-9.00	54.00	Average
3	5470.000	24.48	20.24	44.72	-9.28	54.00	Average
4	* 5516.400	68.64	20.32	88.97	N/A	N/A	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	21.5°C/57%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5510 MHz(CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

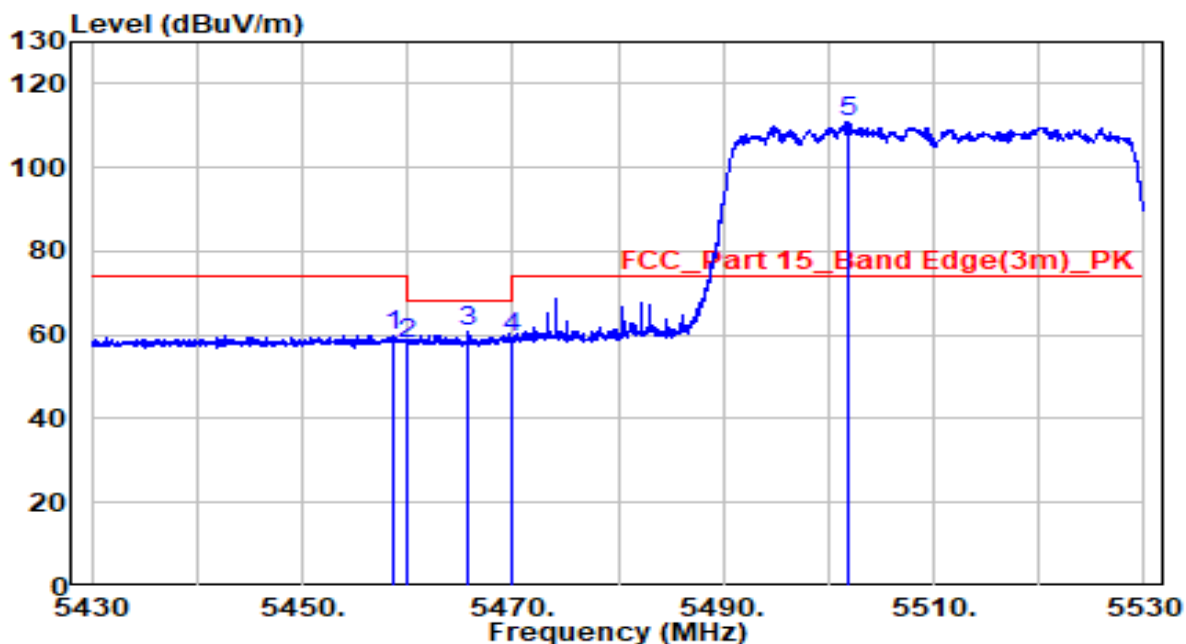


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.550	39.81	20.23	60.04	-13.96	74.00	Peak
2	5460.000	37.56	20.23	57.78	-10.42	68.20	Peak
3	5465.850	40.46	20.23	60.69	-7.51	68.20	Peak
4	5470.000	38.91	20.24	59.14	-9.06	68.20	Peak
5	* 5501.800	90.65	20.28	110.93	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	21.5°C/57%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at channel 5510 MHz(CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

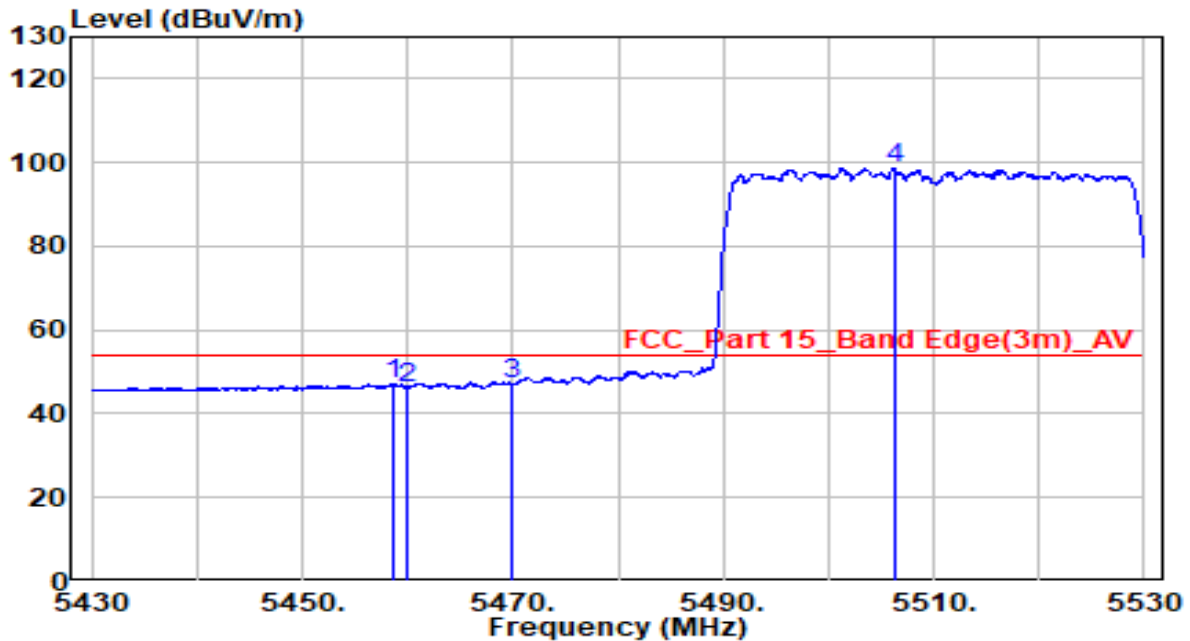


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.600	26.77	20.23	47.00	-7.00	54.00	Average
2	5460.000	26.12	20.23	46.35	-7.65	54.00	Average
3	5470.000	26.72	20.24	46.96	-7.04	54.00	Average
4	* 5506.250	78.44	20.29	98.73	N/A	N/A	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.2°C/49.4%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at Channel 5670 MHz(CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

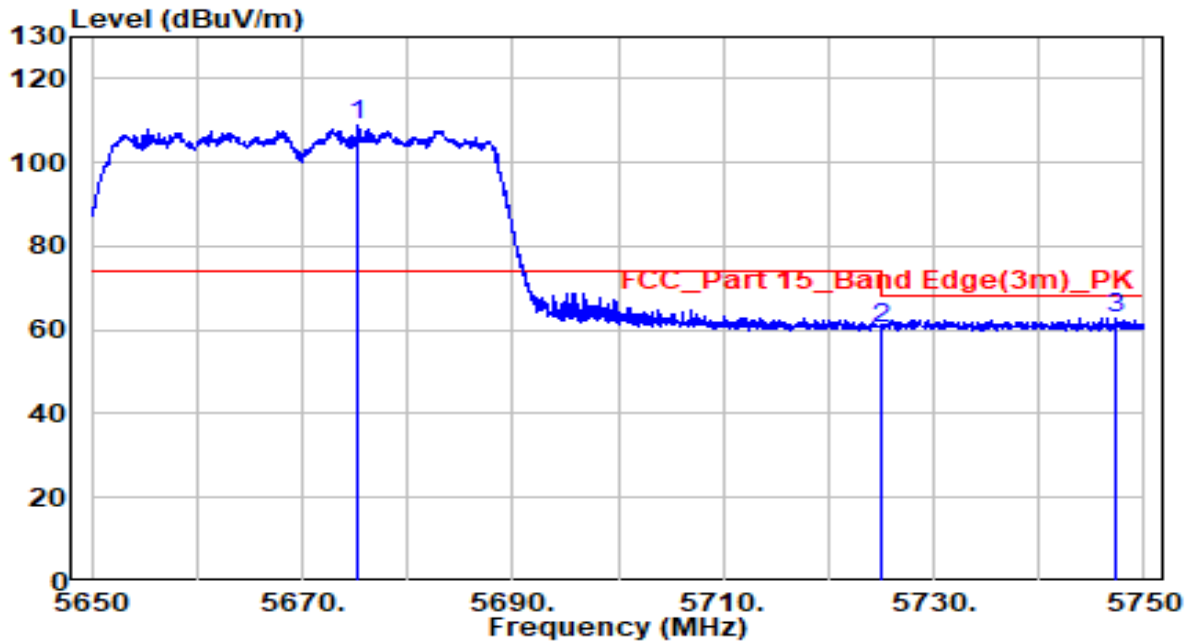


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5675.300	87.89	20.84	108.73	N/A	N/A	Peak
2		5725.000	39.12	21.00	60.12	-8.08	68.20	Peak
3		5747.350	41.85	21.07	62.93	-5.27	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	20.2°C/49.4%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE40 at Channel 5670 MHz(CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

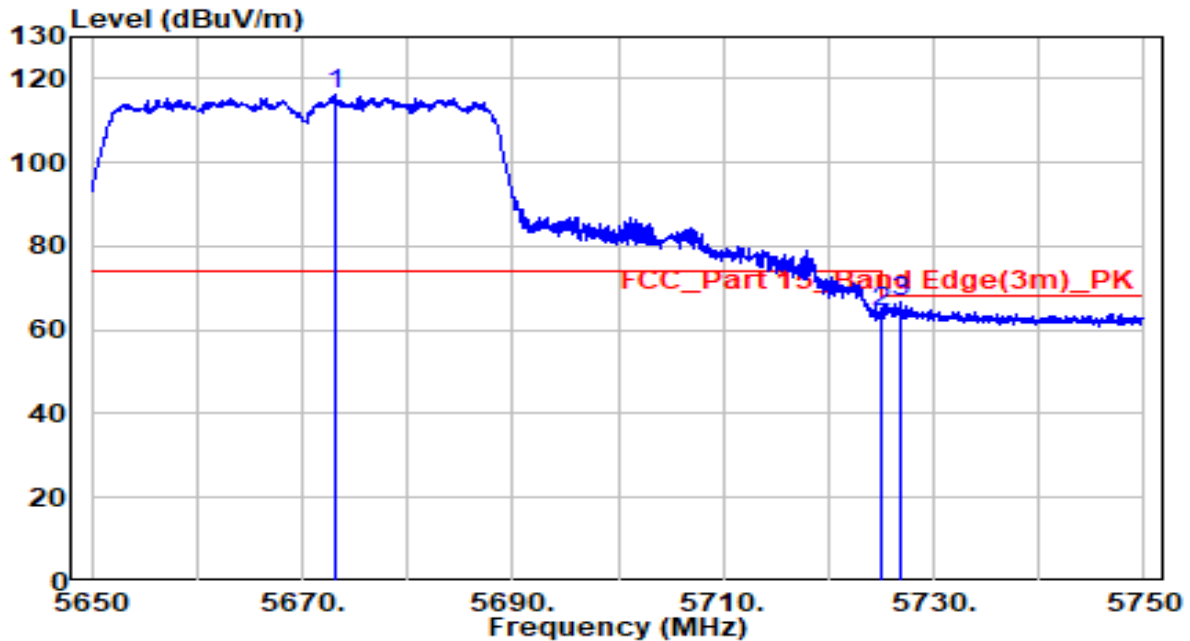


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5673.100	95.22	20.83	116.05	N/A	N/A	Peak
2		5725.000	43.25	21.00	64.25	-3.95	68.20	Peak
3		5726.800	45.87	21.00	66.88	-1.32	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	21.5°C/57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5530 MHz(CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

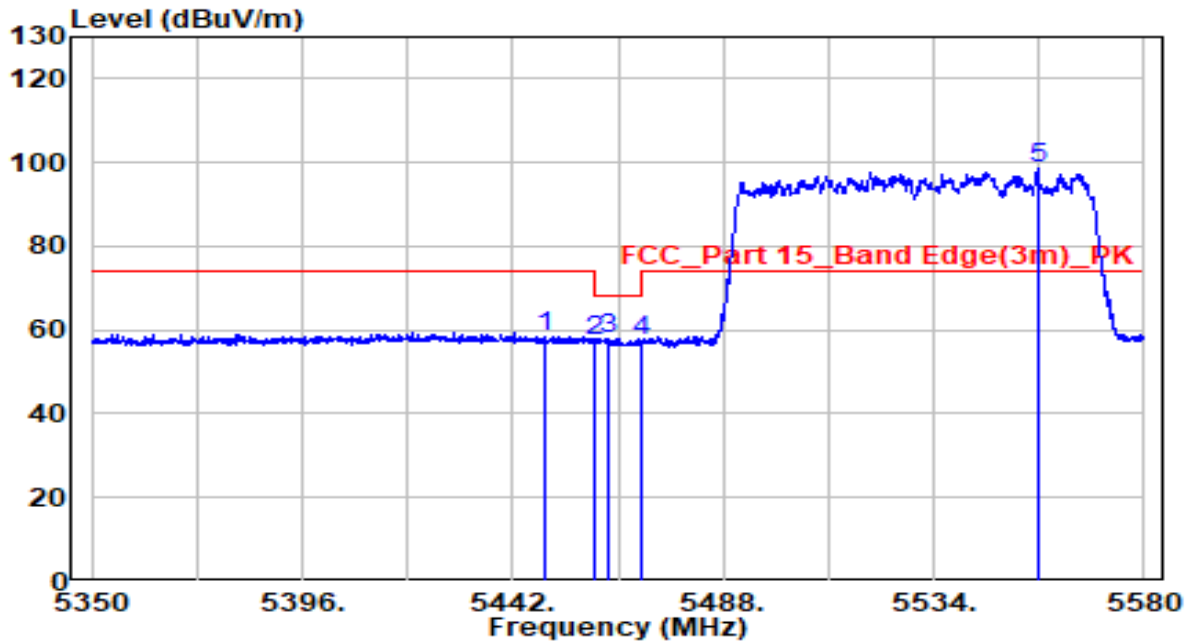


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5449.130	38.19	20.22	58.41	-15.59	74.00	Peak
2	5460.000	37.02	20.23	57.25	-10.95	68.20	Peak
3	5463.045	37.79	20.23	58.02	-10.18	68.20	Peak
4	5470.000	37.31	20.24	57.55	-10.65	68.20	Peak
5	* 5556.655	78.37	20.45	98.82	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	21.5°C/57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5530 MHz(CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

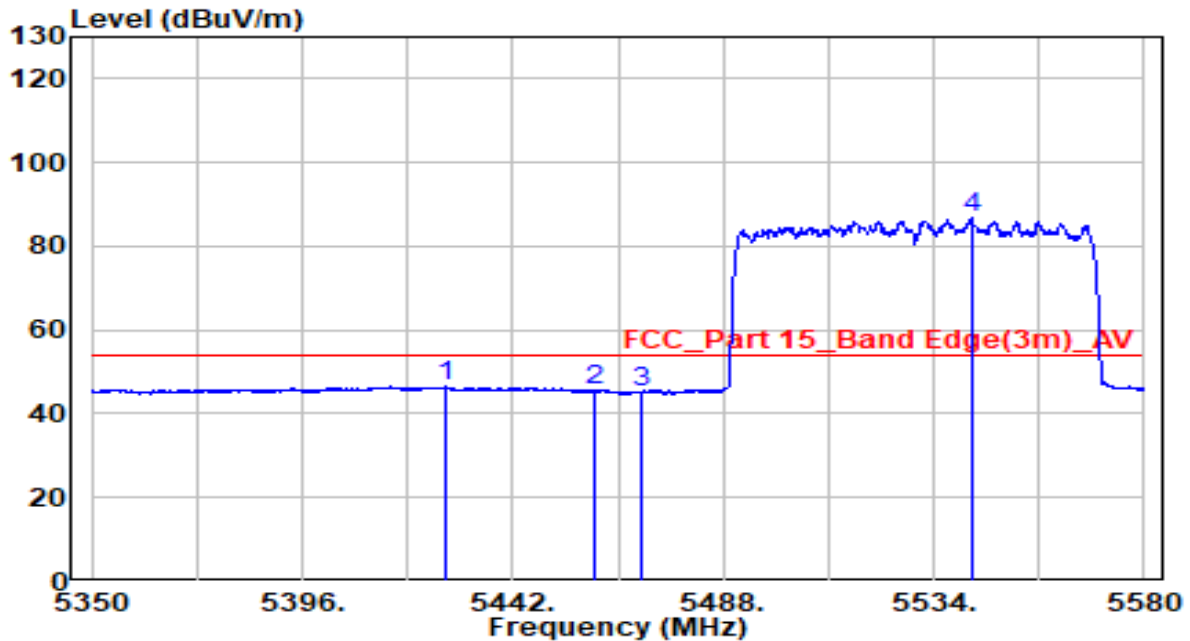


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5427.165	26.21	20.19	46.41	-7.59	54.00	Average
2	5460.000	25.44	20.23	45.67	-8.33	54.00	Average
3	5470.000	24.88	20.24	45.12	-8.88	54.00	Average
4	* 5542.280	66.18	20.41	86.59	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	21.5°C/57%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5530 MHz(CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

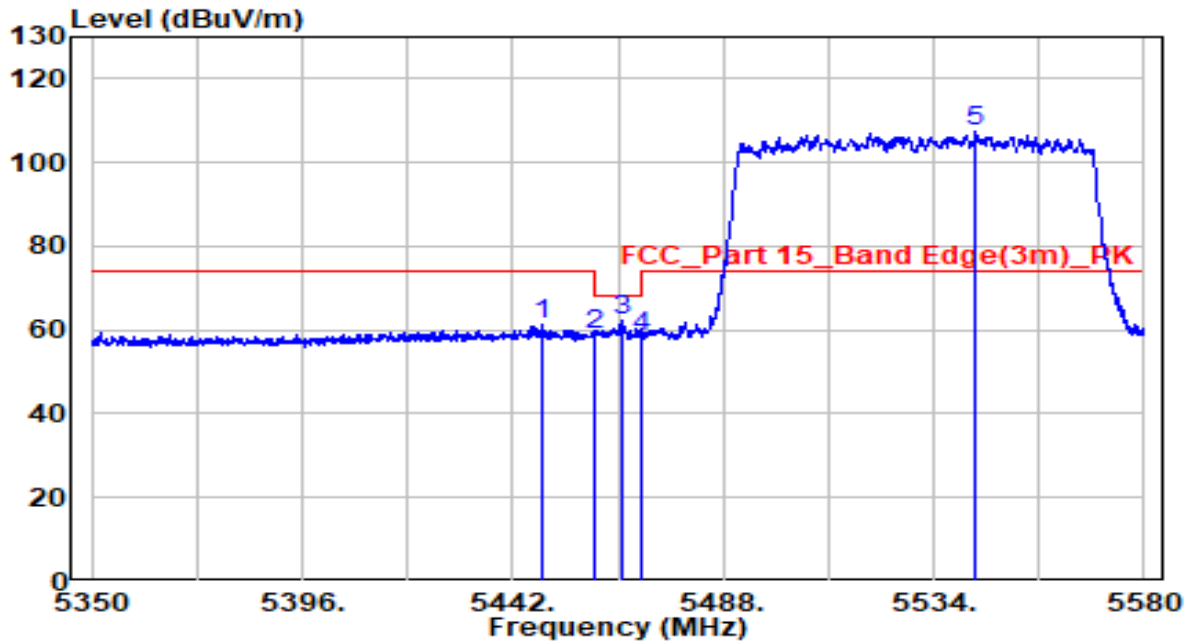


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5448.670	41.08	20.22	61.29	-12.71	74.00	Peak
2	5460.000	38.57	20.23	58.80	-9.40	68.20	Peak
3	5465.690	41.88	20.23	62.11	-6.09	68.20	Peak
4	5470.000	38.20	20.24	58.44	-9.76	68.20	Peak
5	* 5543.200	86.83	20.41	107.24	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	21.5°C/57%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5530 MHz(CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

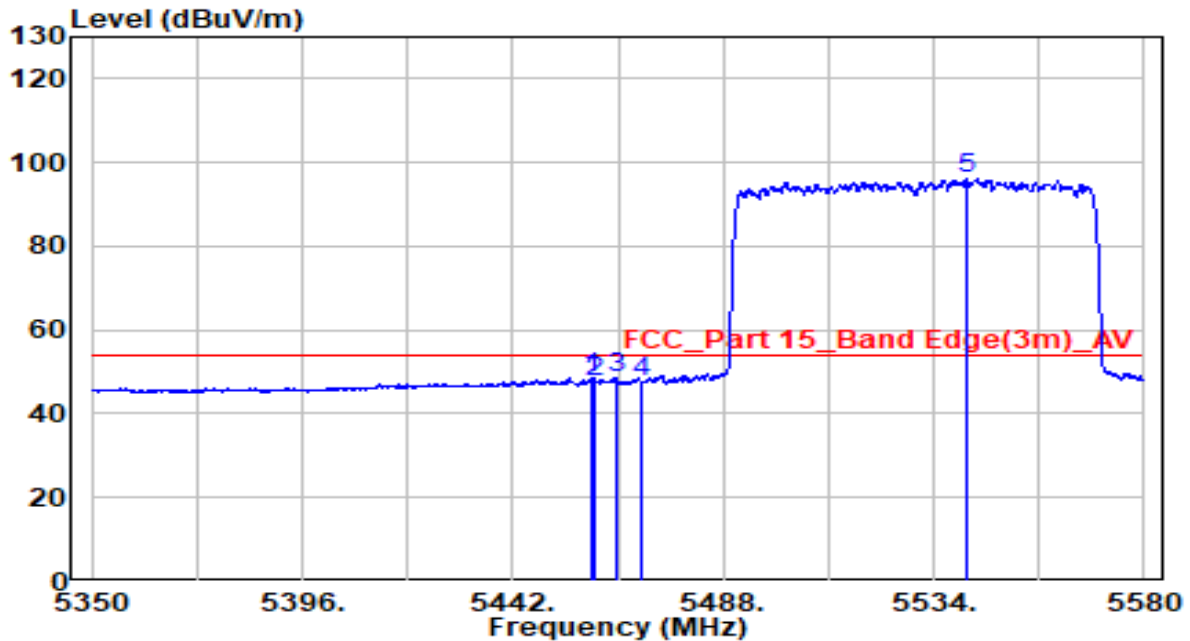


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5459.250	28.26	20.23	48.49	-5.51	54.00	Average
2	5460.000	27.31	20.23	47.54	-6.46	54.00	Average
3	5464.425	28.58	20.23	48.81	-5.19	54.00	Average
4	5470.000	27.46	20.24	47.70	-6.30	54.00	Average
5	* 5541.130	75.63	20.40	96.03	N/A	N/A	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	21.5°C/57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE80 at Channel 5610 MHz(CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

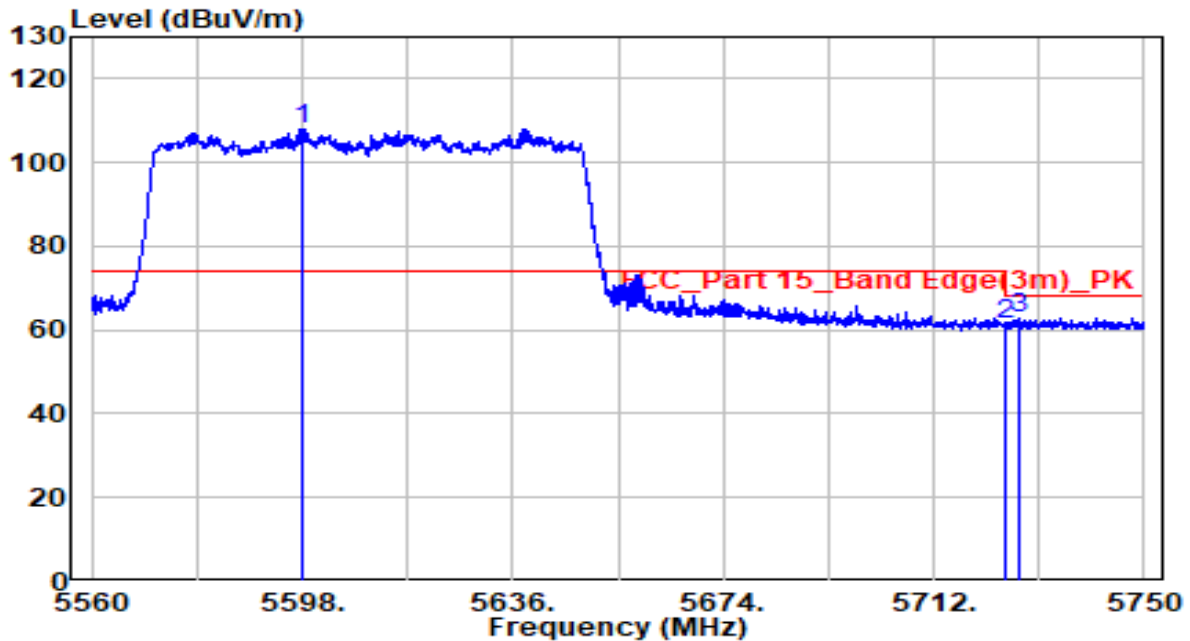


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5598.095	87.56	20.59	108.15	N/A	N/A	Peak
2		5725.000	40.49	21.00	61.49	-6.71	68.20	Peak
3		5727.200	41.81	21.01	62.81	-5.39	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	21.5°C/57%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE80 at Channel 5610 MHz(CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

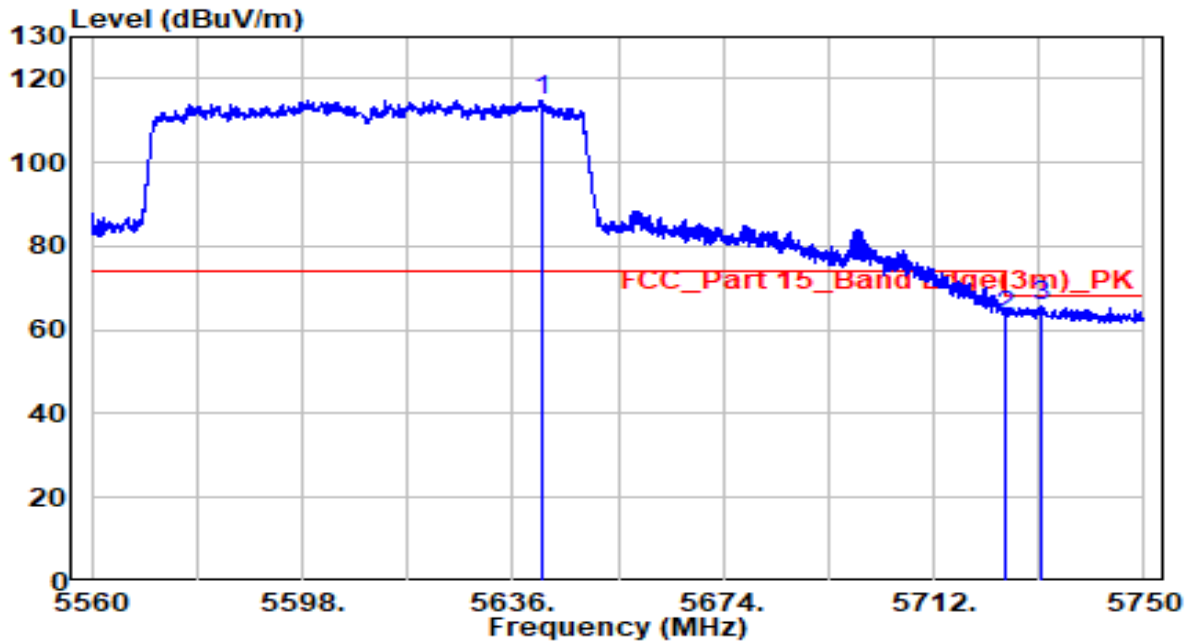


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5641.415	94.23	20.73	114.96	N/A	N/A	Peak
2		5725.000	42.43	21.00	63.43	-4.77	68.20	Peak
3		5731.380	44.59	21.02	65.61	-2.59	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	21.5°C/57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE160 at channel 5570 MHz(CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

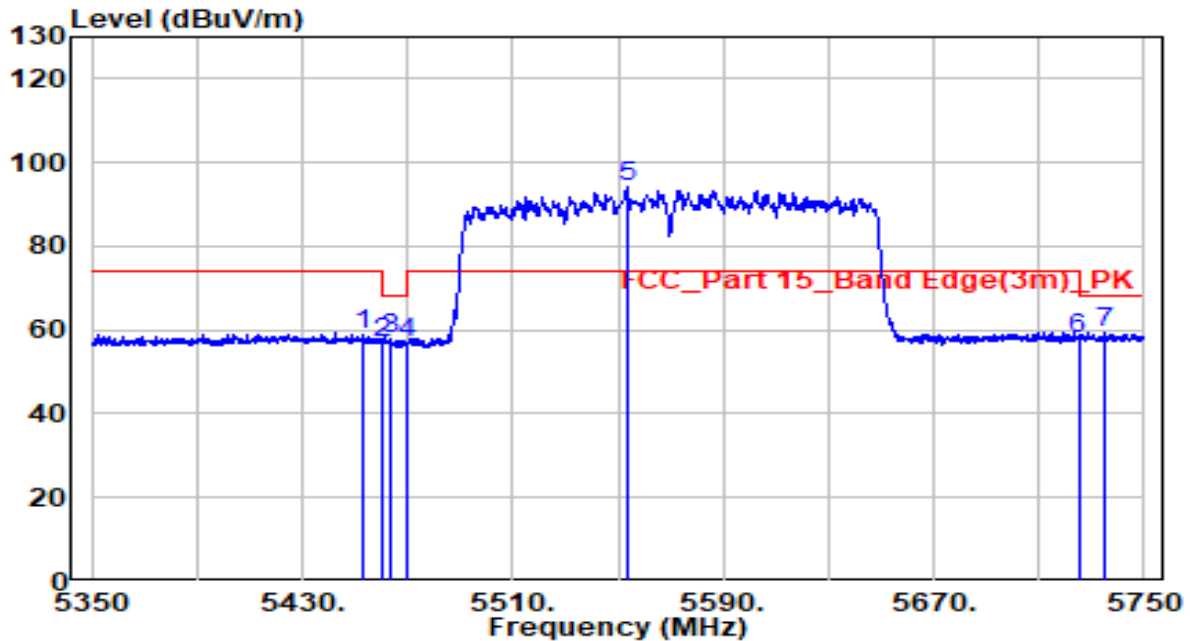


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5453.400	38.83	20.22	59.06	-14.94	74.00	Peak
2	5460.000	36.80	20.23	57.03	-11.17	68.20	Peak
3	5463.600	37.72	20.23	57.95	-10.25	68.20	Peak
4	5470.000	36.61	20.24	56.85	-11.35	68.20	Peak
5	* 5553.600	73.58	20.44	94.02	N/A	N/A	Peak
6	5725.000	36.72	21.00	57.72	-10.48	68.20	Peak
7	5734.800	38.31	21.03	59.34	-8.86	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	21.5°C/57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE160 at channel 5570 MHz(CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

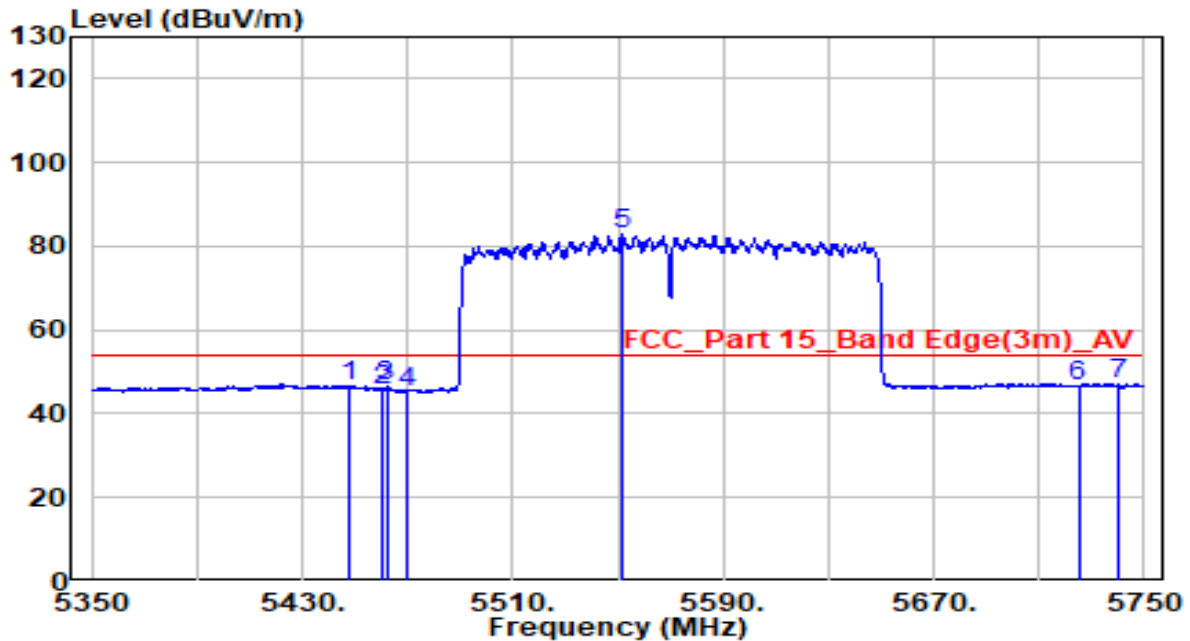


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5447.800	26.27	20.22	46.48	-7.52	54.00	Average
2	5460.000	25.64	20.23	45.87	-8.13	54.00	Average
3	5462.000	26.24	20.23	46.47	-7.53	54.00	Average
4	5470.000	25.14	20.24	45.38	-8.62	54.00	Average
5	* 5551.600	62.45	20.44	82.88	N/A	N/A	Average
6	5725.000	25.51	21.00	46.51	-7.49	54.00	Average
7	5740.200	26.03	21.05	47.07	-6.93	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	21.5°C/57%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE160 at channel 5570 MHz(CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

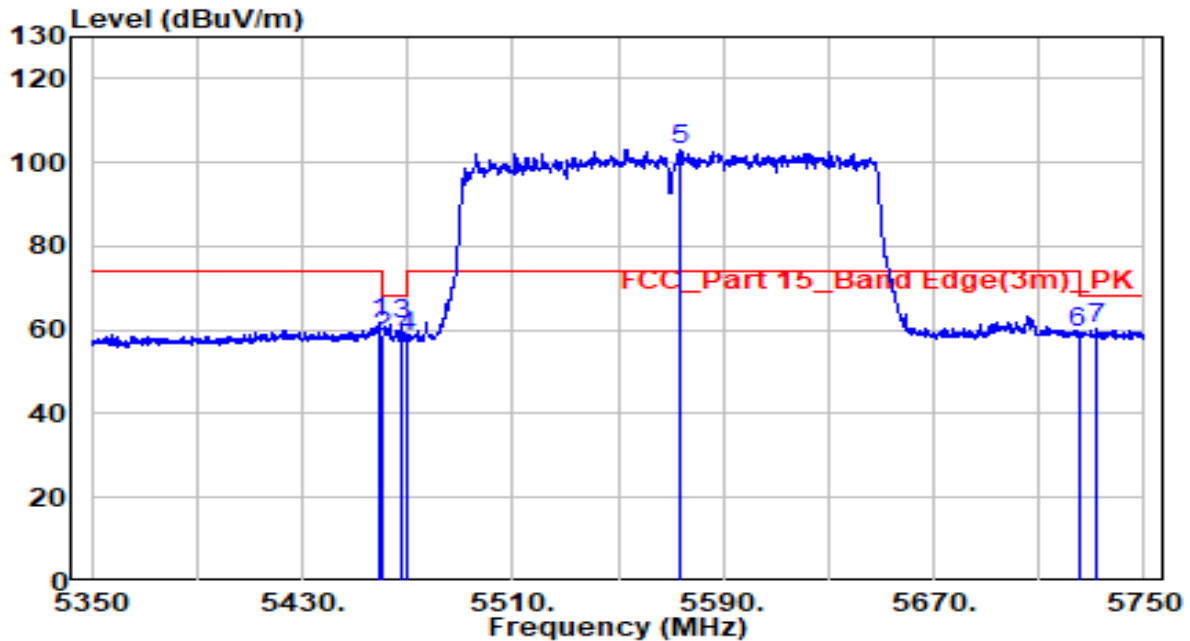


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5459.000	41.49	20.23	61.72	-12.28	74.00	Peak
2	5460.000	38.39	20.23	58.62	-9.58	68.20	Peak
3	5467.400	41.32	20.24	61.56	-6.64	68.20	Peak
4	5470.000	38.07	20.24	58.31	-9.89	68.20	Peak
5	* 5573.800	82.58	20.51	103.09	N/A	N/A	Peak
6	5725.000	38.37	21.00	59.37	-8.83	68.20	Peak
7	5732.000	39.23	21.02	60.25	-7.95	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	21.5°C/57%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE160 at channel 5570 MHz(CDD Mode N _{SS} =2)	Test Voltage	120V/60HZ

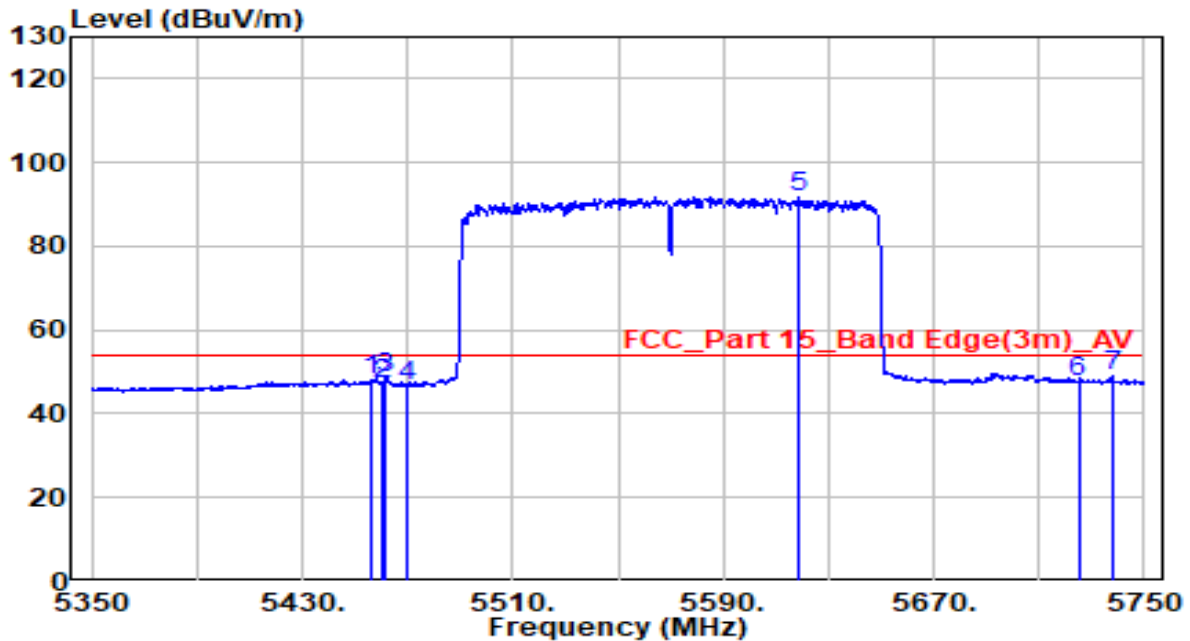


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5456.000	27.94	20.22	48.17	-5.83	54.00	Average
2	5460.000	26.89	20.23	47.12	-6.88	54.00	Average
3	5461.600	28.25	20.23	48.48	-5.52	54.00	Average
4	5470.000	26.43	20.24	46.67	-7.33	54.00	Average
5	* 5618.600	70.99	20.65	91.65	N/A	N/A	Average
6	5725.000	26.55	21.00	47.55	-6.45	54.00	Average
7	5737.800	27.86	21.04	48.90	-5.10	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
-----	---------------------------------------	--------------	------------

Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	21.5°C/57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ac-VHT20 at Channel 5180MHz(Beamforming Mode)	Test Voltage	120V/60HZ

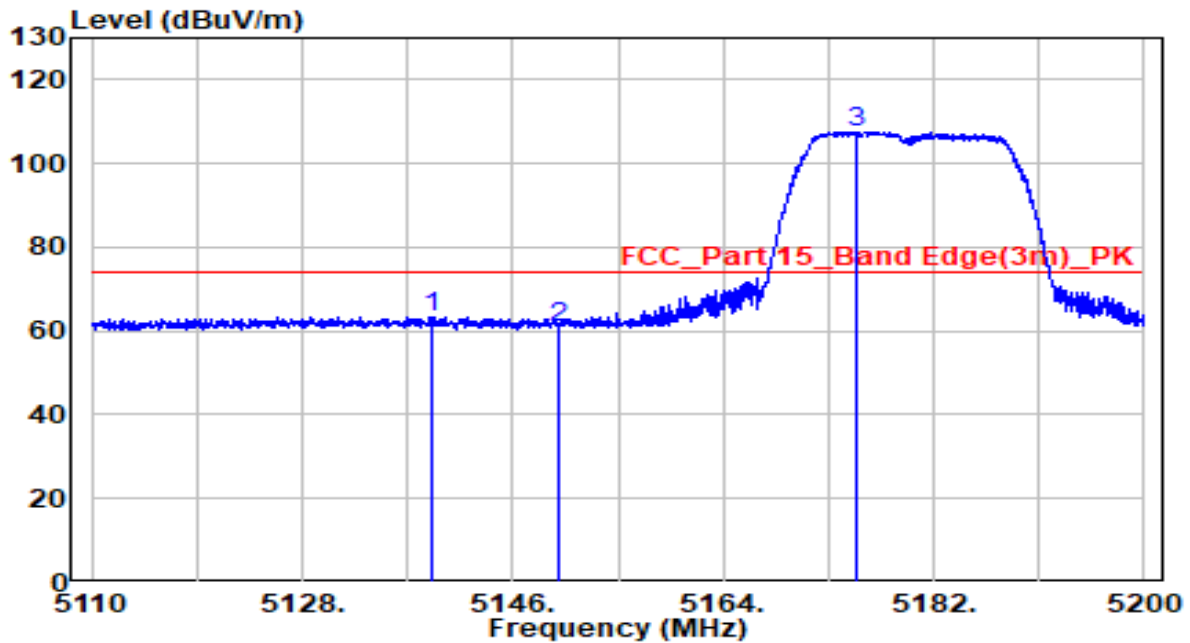


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5139.115	43.47	19.89	63.36	-10.64	74.00	Peak
2	5150.000	40.81	19.91	60.72	-13.28	74.00	Peak
3	* 5175.295	87.63	19.93	107.56	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	21.5°C/57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ac-VHT20 at Channel 5180 MHz(Beamforming Mode)	Test Voltage	120V/60HZ

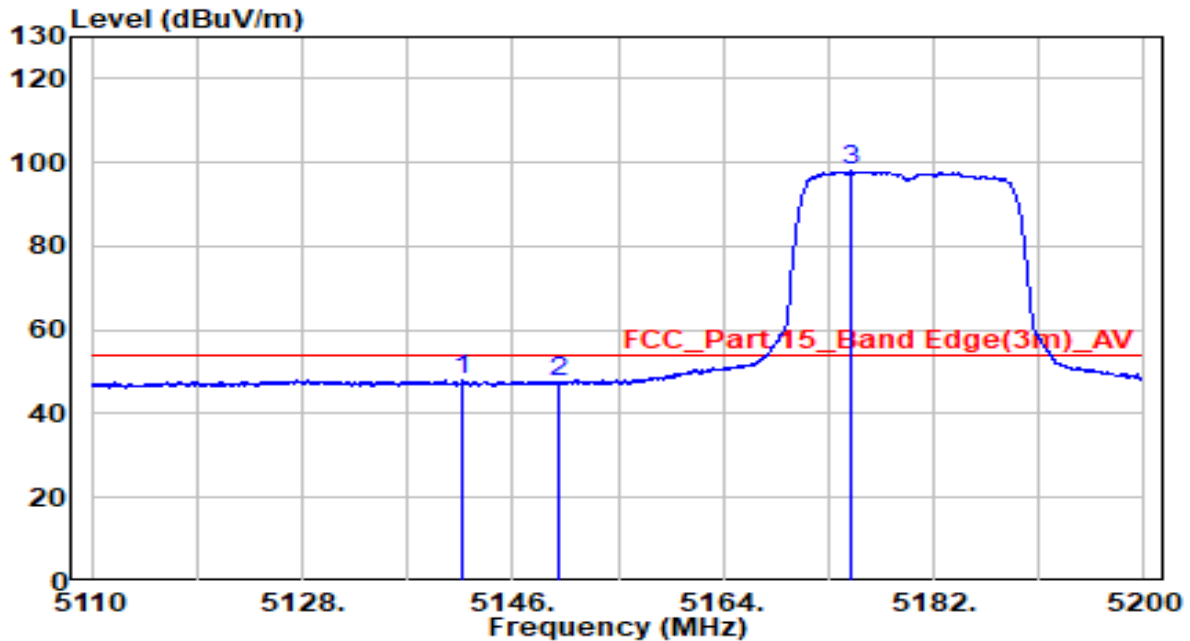


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5141.635	27.99	19.90	47.89	-6.11	54.00	Average
2	5150.000	27.74	19.91	47.64	-6.36	54.00	Average
3	* 5174.935	77.98	19.93	97.91	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	21.5°C/57%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ac-VHT20 at Channel 5180 MHz(Beamforming Mode)	Test Voltage	

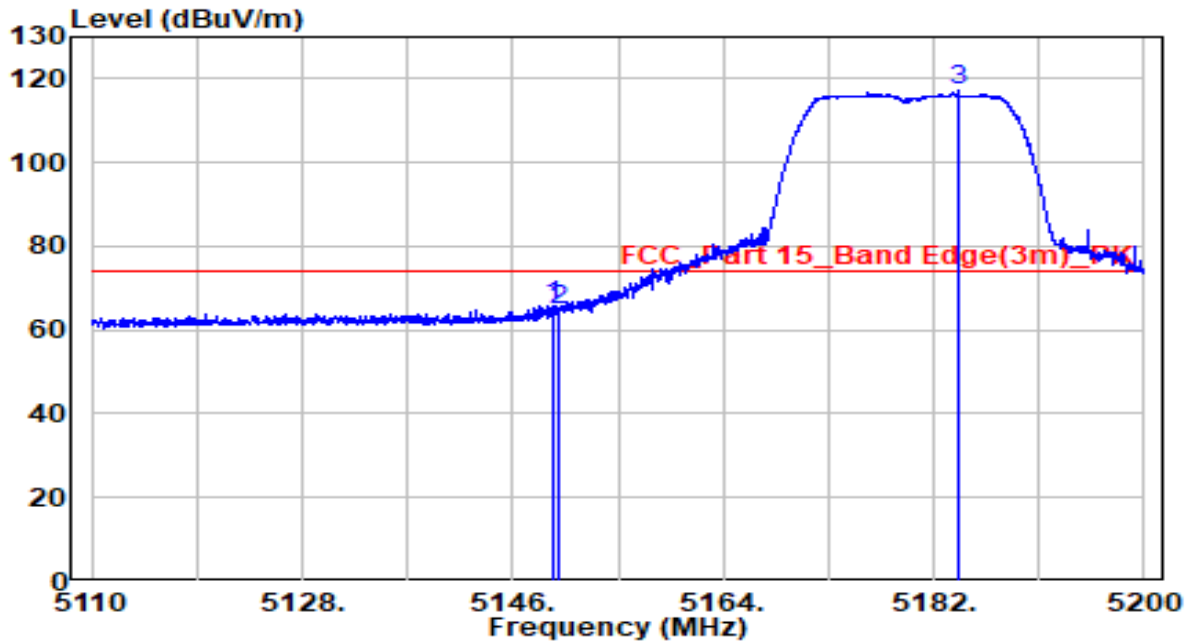


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.555	45.83	19.91	65.74	-8.26	74.00	Peak
2	5150.000	44.96	19.91	64.87	-9.13	74.00	Peak
3	* 5184.070	97.38	19.94	117.32	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	21.5°C/57%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ac-VHT20 at Channel 5180 MHz(Beamforming Mode)	Test Voltage	

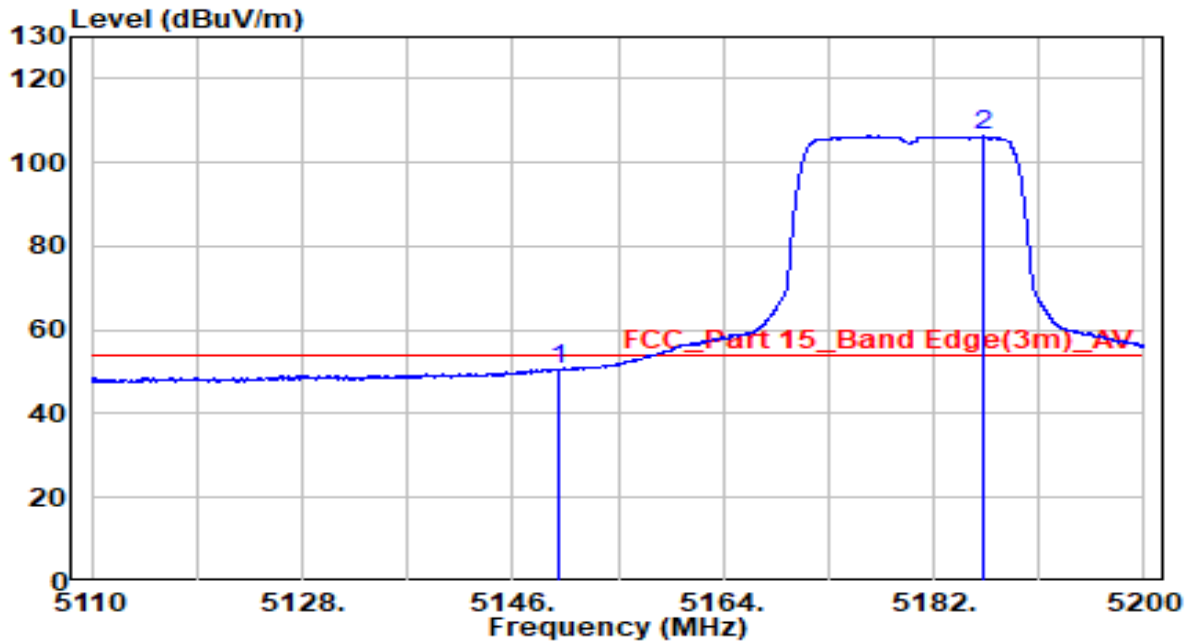


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	30.67	19.91	50.57	-3.43	54.00	Average
2	* 5186.185	86.31	19.94	106.26	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	21.5°C/57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5500 MHz MHz(Beamforming Mode)	Test Voltage	120V/60Hz

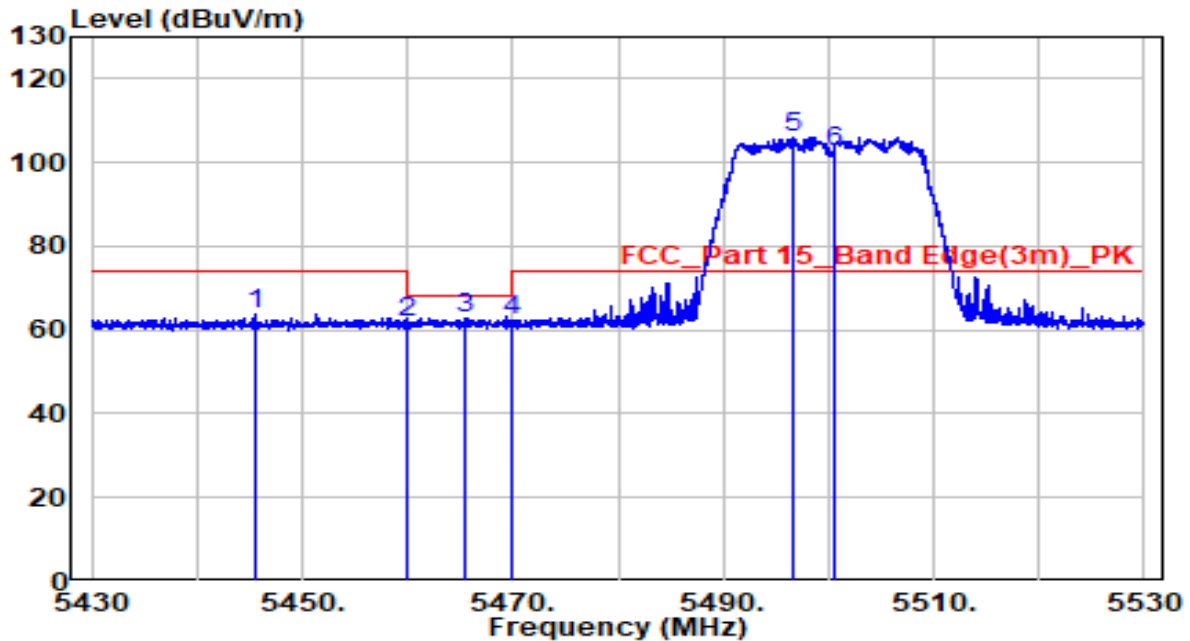


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5445.450	43.72	20.21	63.94	-10.06	74.00	Peak
2	5460.000	41.39	20.23	61.62	-6.58	68.20	Peak
3	5465.400	42.69	20.23	62.92	-5.28	68.20	Peak
4	5470.000	41.92	20.24	62.16	-6.04	68.20	Peak
5	* 5496.550	85.84	20.27	106.11	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	21.5°C/57%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5500 MHz MHz(Beamforming Mode)	Test Voltage	120V/60Hz

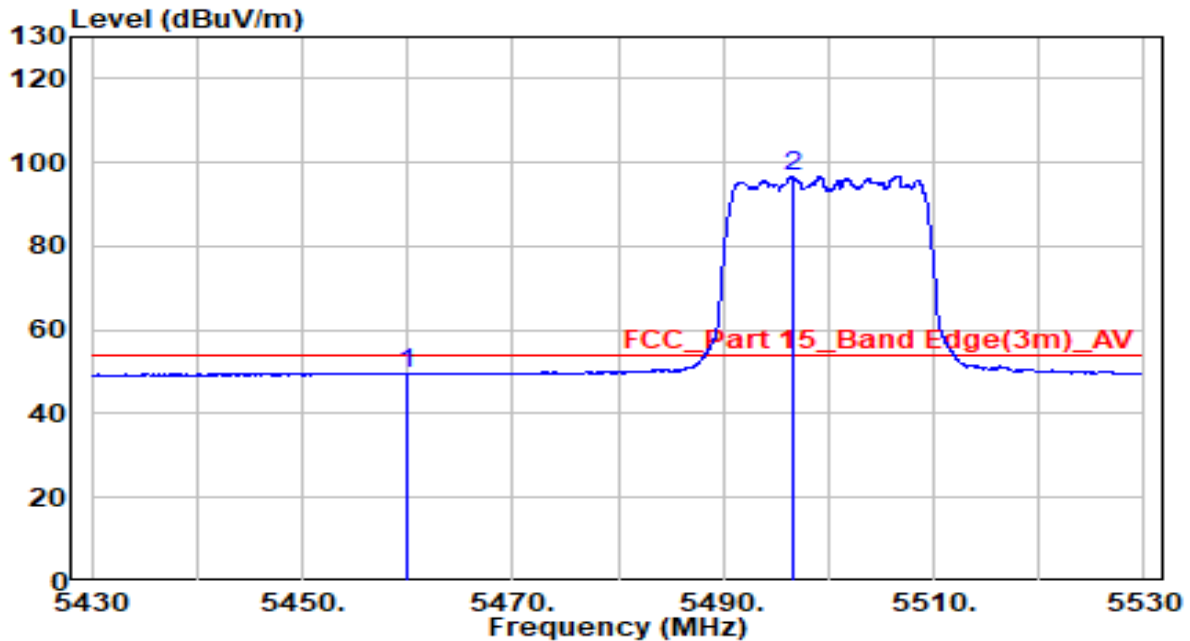


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	29.37	20.23	49.60	-4.40	54.00	Average
2	* 5496.550	76.57	20.27	96.84	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5500 MHz MHz(Beamforming Mode)	Test Voltage	120V/60Hz

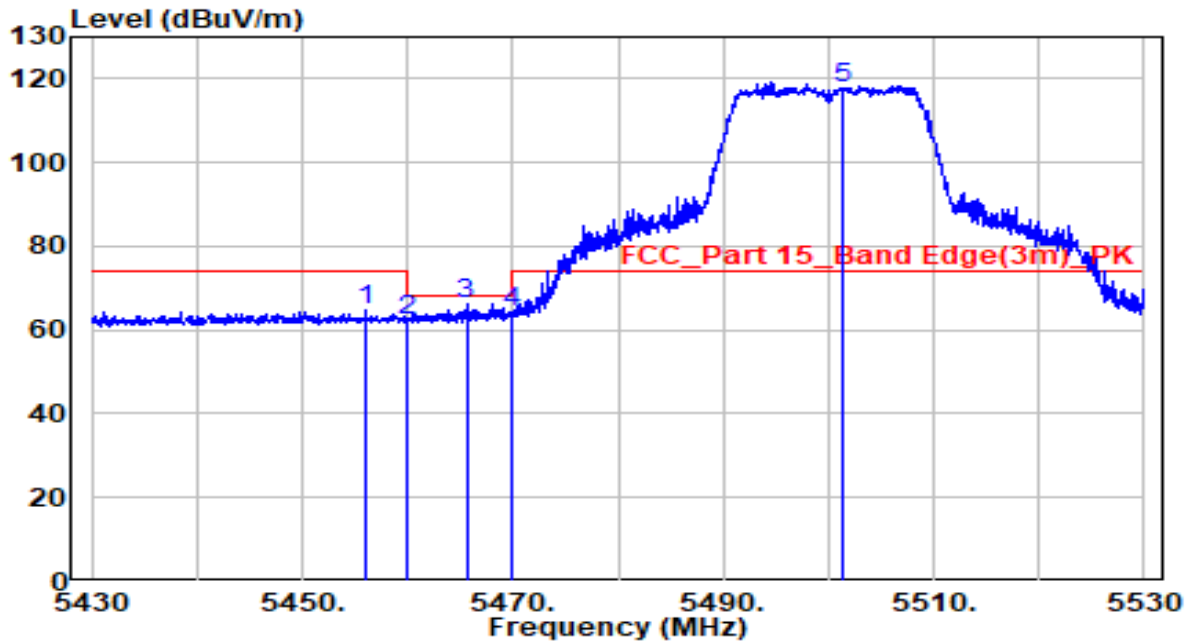


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5456.000	44.35	20.22	64.57	-9.43	74.00	Peak
2	5460.000	42.08	20.23	62.31	-5.89	68.20	Peak
3	5465.600	46.13	20.23	66.37	-1.83	68.20	Peak
4	5470.000	44.15	20.24	64.39	-3.81	68.20	Peak
5	* 5501.450	97.63	20.27	117.90	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5500 MHz MHz(Beamforming Mode)	Test Voltage	120V/60Hz

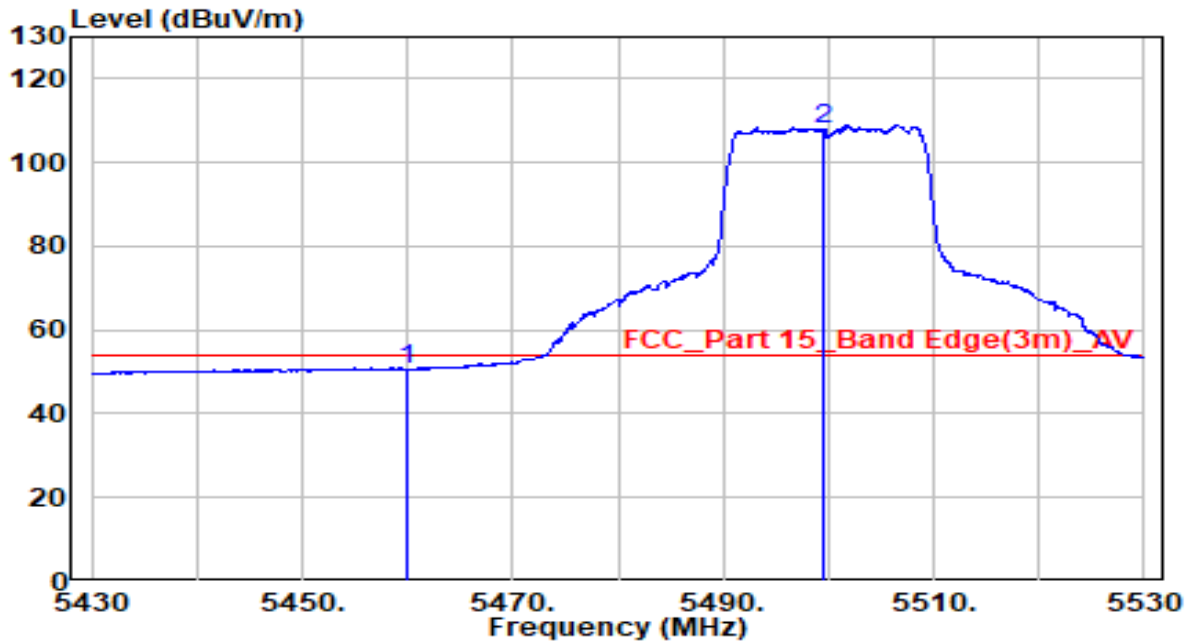


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	30.35	20.23	50.58	-3.42	54.00	Average
2	* 5499.500	87.58	20.27	107.85	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ac-VHT20 at Channel 5700 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

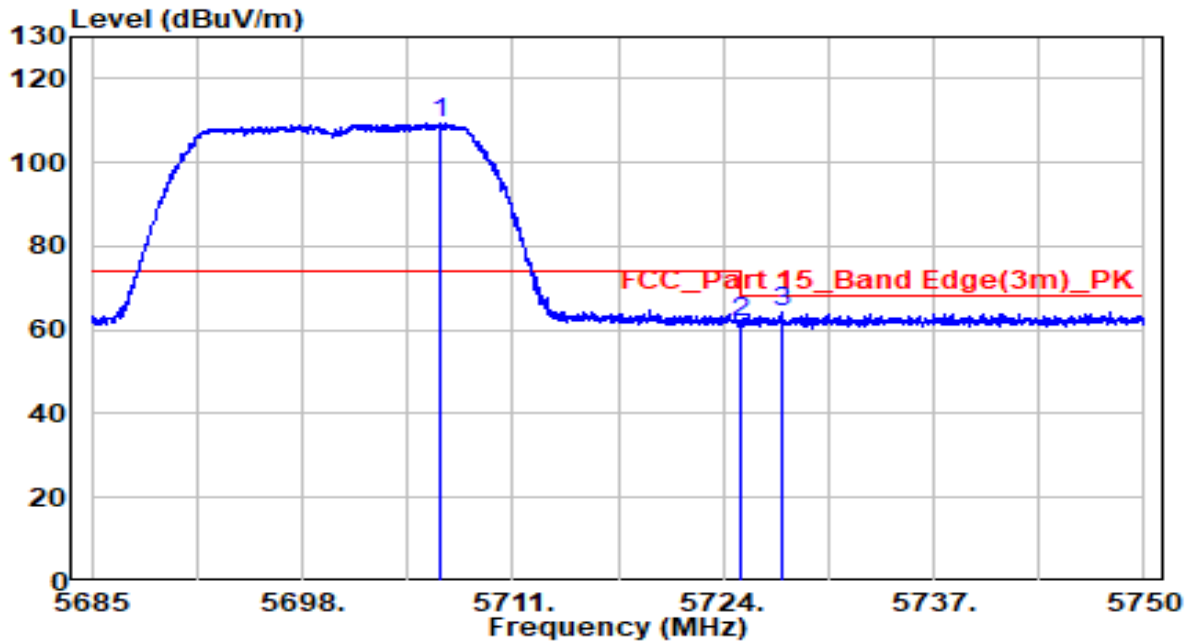


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5706.450	88.50	20.94	109.44	N/A	N/A	Peak
2		5725.000	40.98	21.00	61.98	-6.22	68.20	Peak
3		5727.575	43.17	21.01	64.18	-4.02	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ac-VHT20 at Channel 5700 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

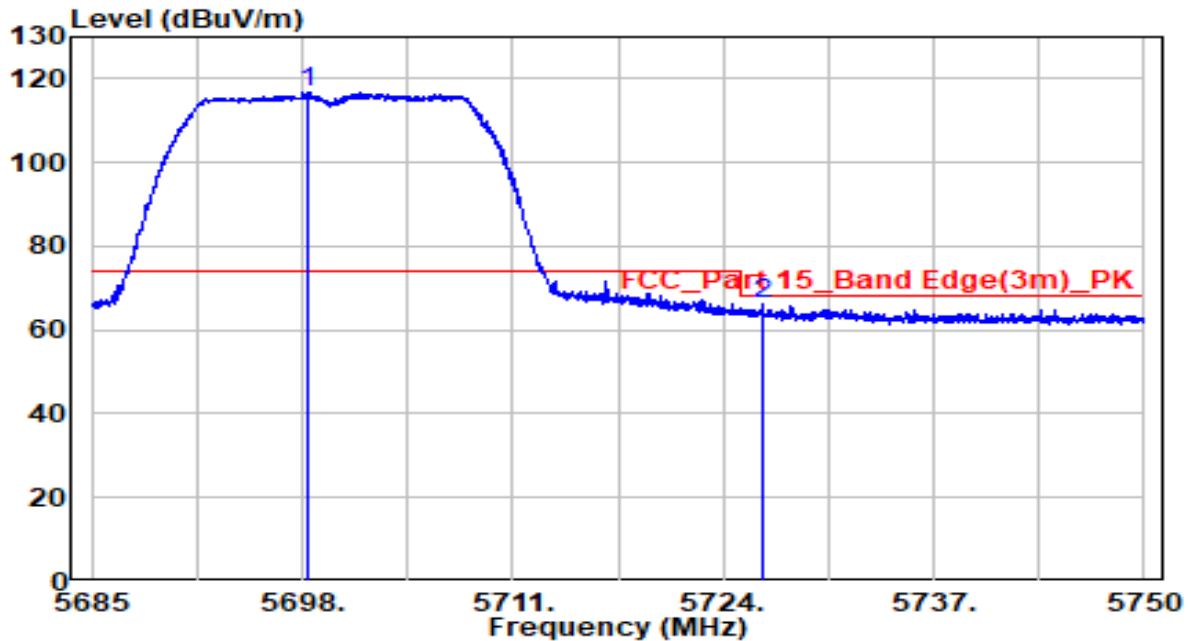


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5698.357	96.03	20.91	116.95	N/A	N/A	Peak
2		5726.470	45.03	21.00	66.04	-2.16	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5745 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

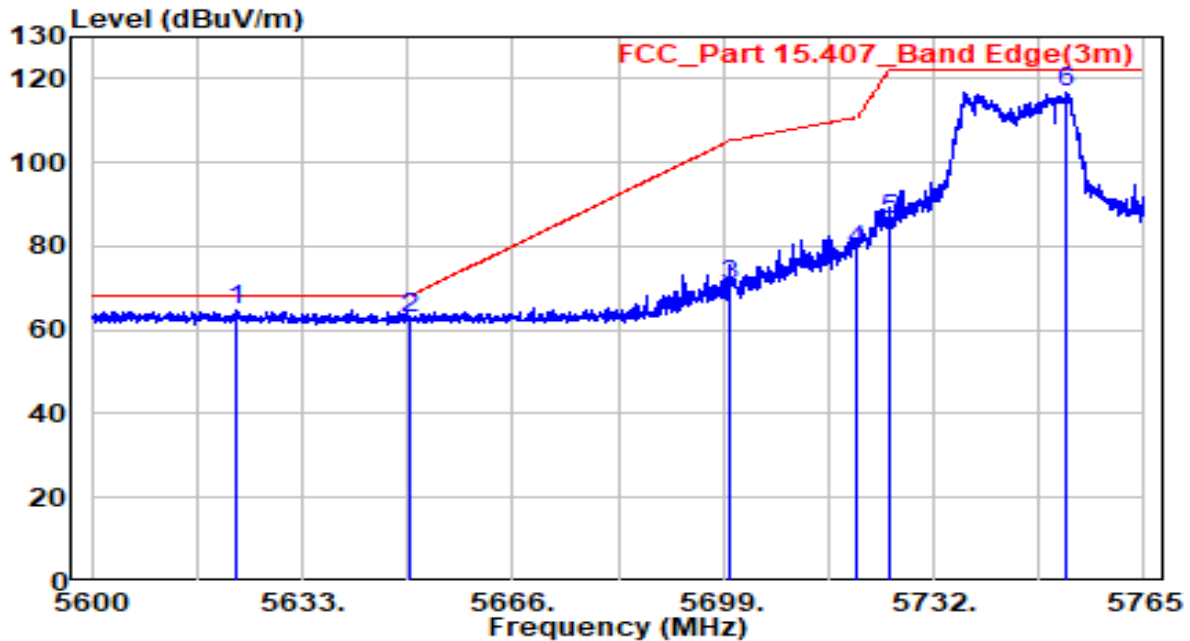


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5622.440	44.10	20.67	64.77	-3.43	68.20	Peak
2	5650.000	42.12	20.76	62.87	-5.33	68.20	Peak
3	5700.000	49.63	20.92	70.54	-34.66	105.20	Peak
4	5720.000	58.13	20.98	79.12	-31.68	110.80	Peak
5	5725.000	65.36	21.00	86.36	-35.84	122.20	Peak
6	5752.708	95.66	21.09	116.75	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5745 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

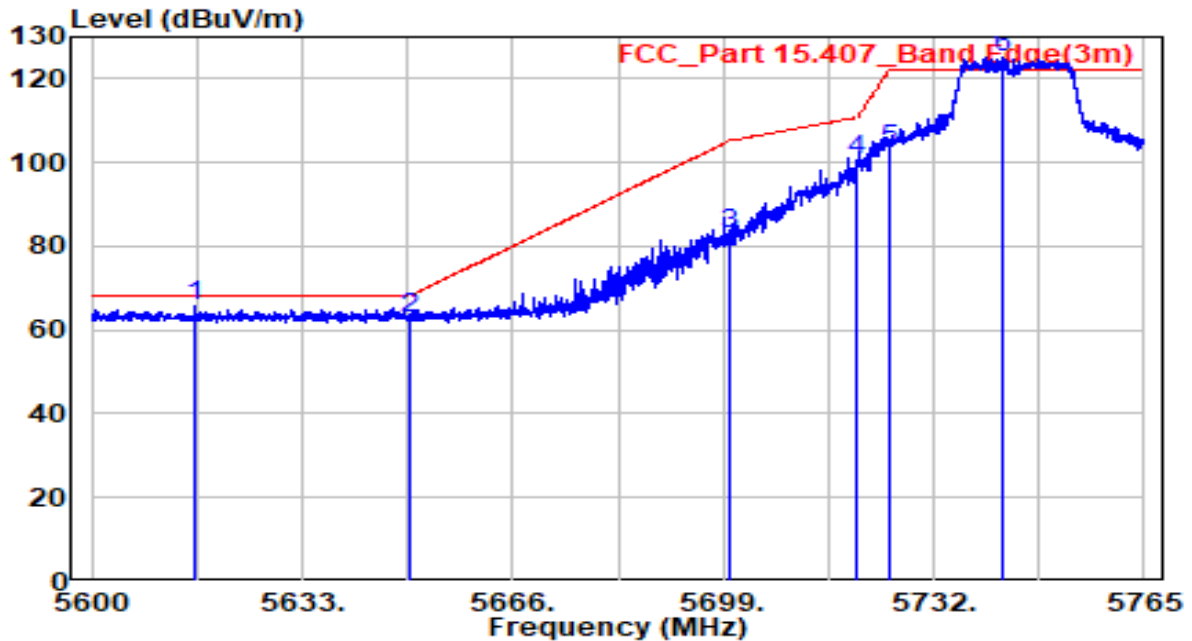


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5616.170	44.88	20.65	65.53	-2.67	68.20	Peak
2	5650.000	41.85	20.76	62.61	-5.59	68.20	Peak
3	5700.000	62.17	20.92	83.09	-22.11	105.20	Peak
4	5720.000	79.53	20.98	100.52	-10.28	110.80	Peak
5	5725.000	81.92	21.00	102.92	-19.28	122.20	Peak
6	* 5742.890	104.02	21.06	125.08	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5825 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

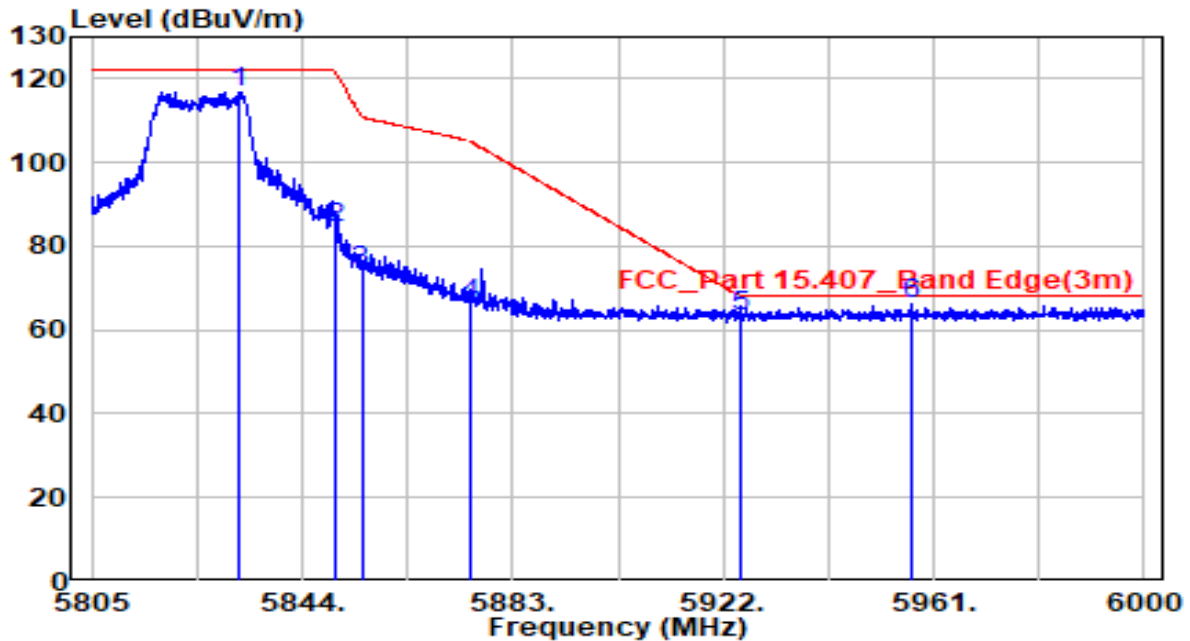


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5832.300	95.65	21.35	117.00	N/A	N/A	Peak
2	5850.000	62.91	21.40	84.31	-37.89	122.20	Peak
3	5855.000	52.52	21.42	73.94	-36.86	110.80	Peak
4	5875.000	44.96	21.49	66.45	-38.75	105.20	Peak
5	5925.000	41.42	21.65	63.06	-5.14	68.20	Peak
6	* 5957.100	44.24	21.75	65.99	-2.21	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT20 at channel 5825 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

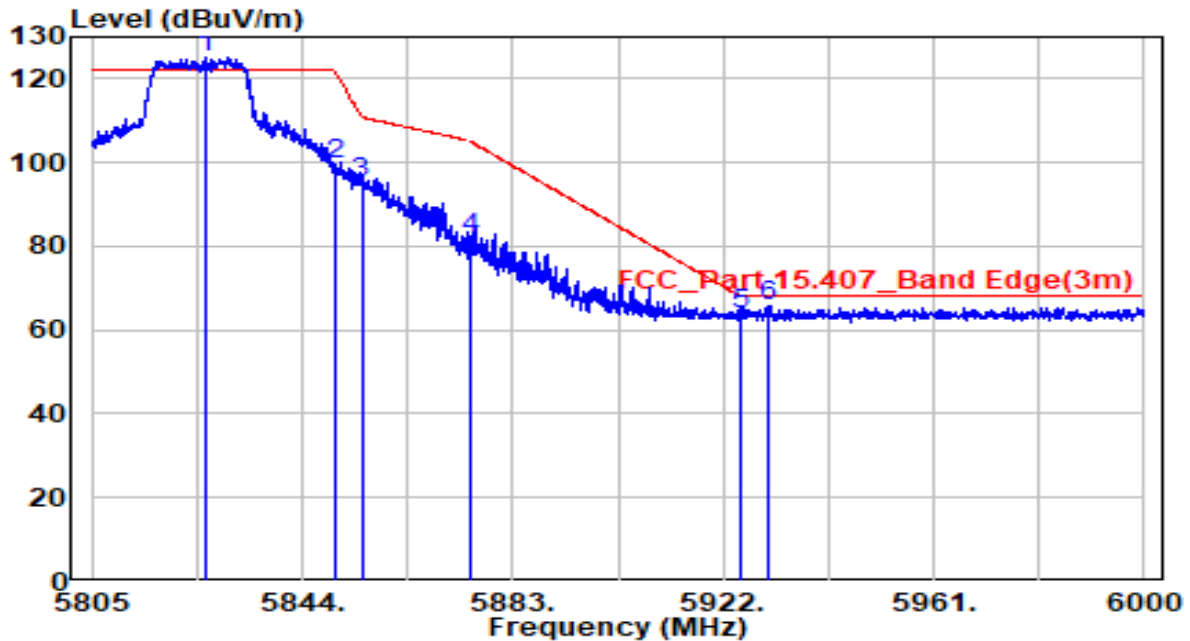


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5826.353	103.58	21.33	124.91	N/A	N/A	Peak
2		5850.000	78.23	21.40	99.64	-22.56	122.20	Peak
3		5855.000	73.83	21.42	95.25	-15.55	110.80	Peak
4		5875.000	60.32	21.49	81.81	-23.39	105.20	Peak
5		5925.000	42.16	21.65	63.81	-4.39	68.20	Peak
6		5930.385	44.09	21.66	65.75	-2.45	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ac-VHT40 at Channel 5190 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

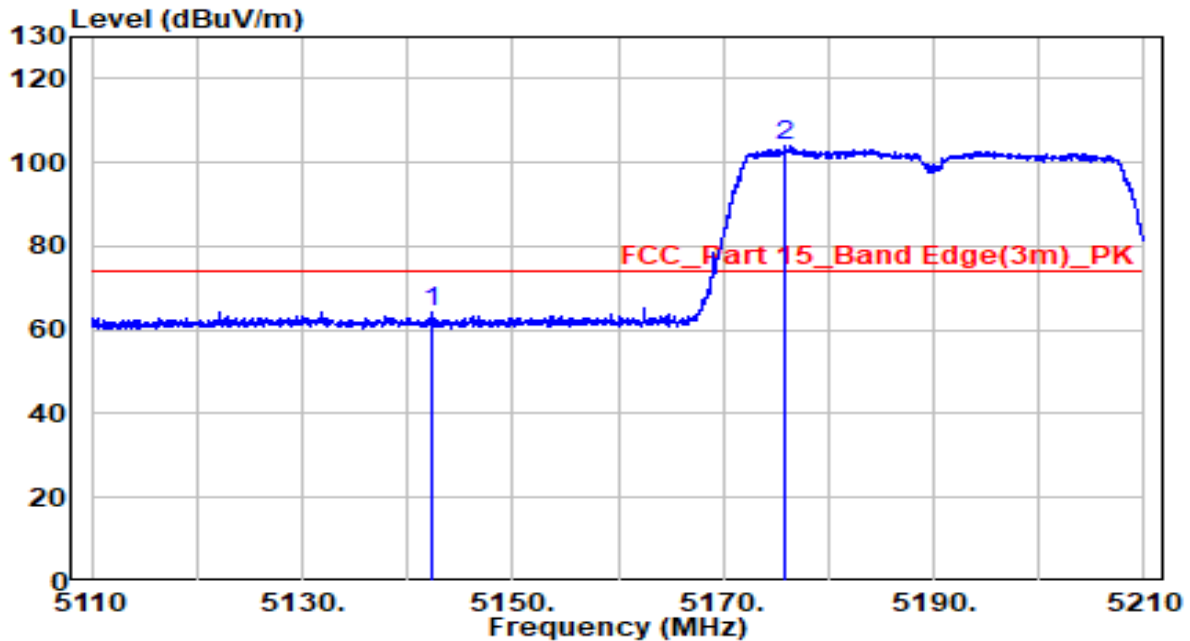


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5142.250	44.20	19.90	64.10	-9.90	74.00	Peak
2	* 5175.950	84.20	19.93	104.14	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ac-VHT40 at Channel 5190 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

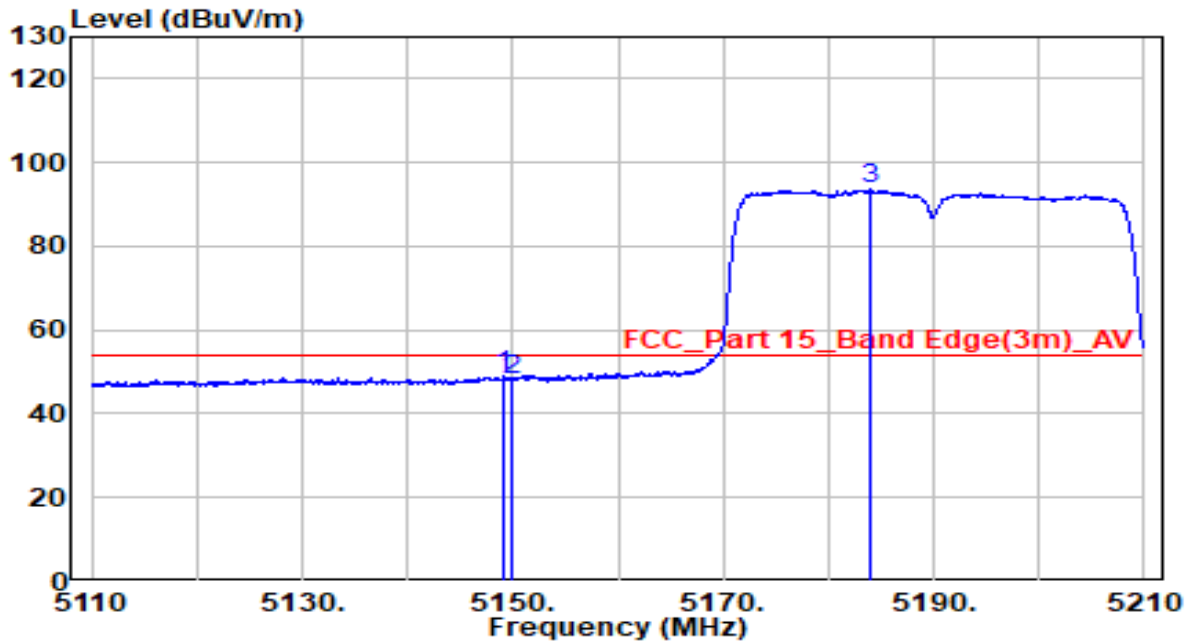


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.200	28.95	19.91	48.85	-5.15	54.00	Average
2	5150.000	28.22	19.91	48.13	-5.87	54.00	Average
3	* 5184.100	73.56	19.94	93.50	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ac-VHT40 at Channel 5190 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

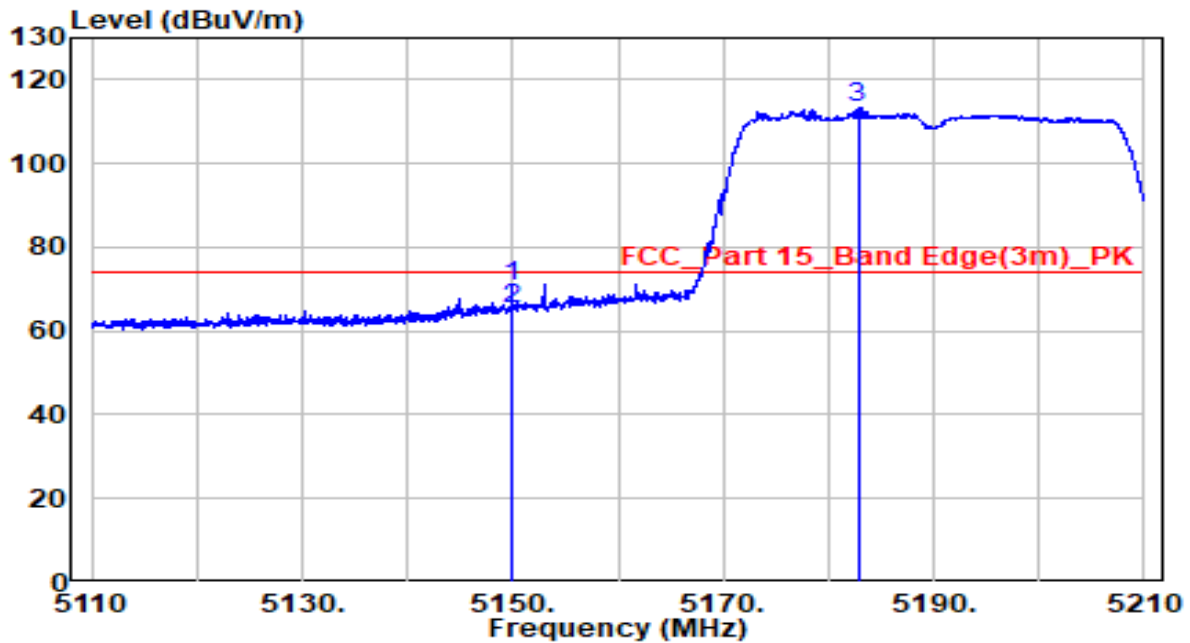


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.900	50.66	19.91	70.56	-3.44	74.00	Peak
2	5150.000	45.31	19.91	65.22	-8.78	74.00	Peak
3	* 5182.800	93.54	19.94	113.48	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ac-VHT40 at Channel 5190 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

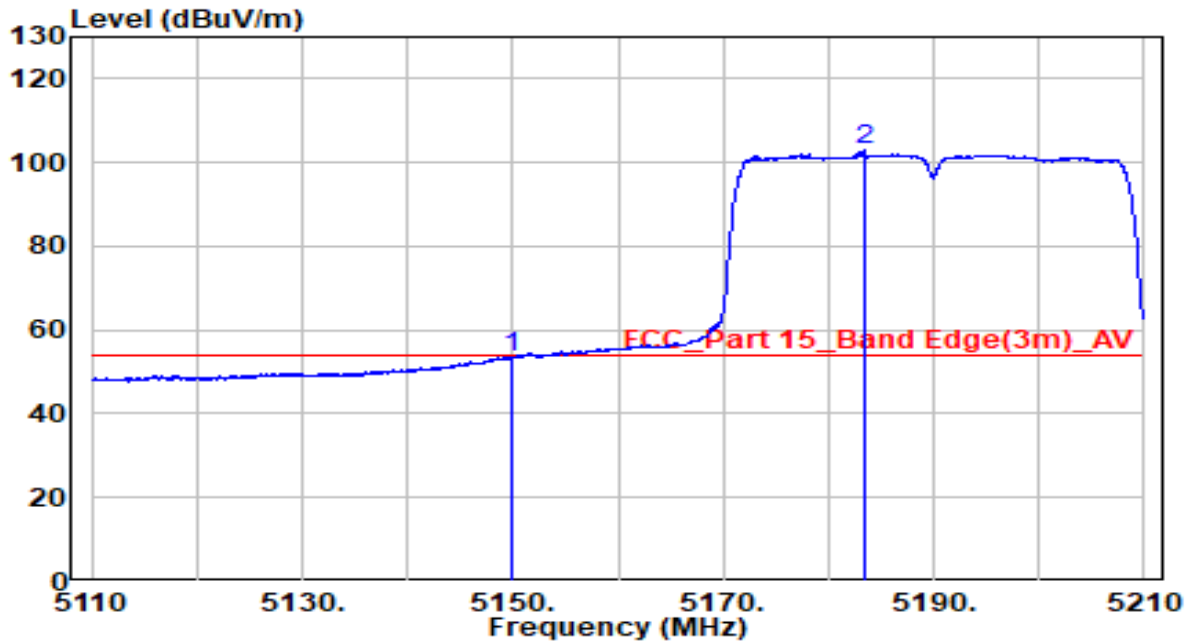


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	33.43	19.91	53.33	-0.67	54.00	Average
2	* 5183.350	82.88	19.94	102.82	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ac-VHT40 at Channel 5510 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

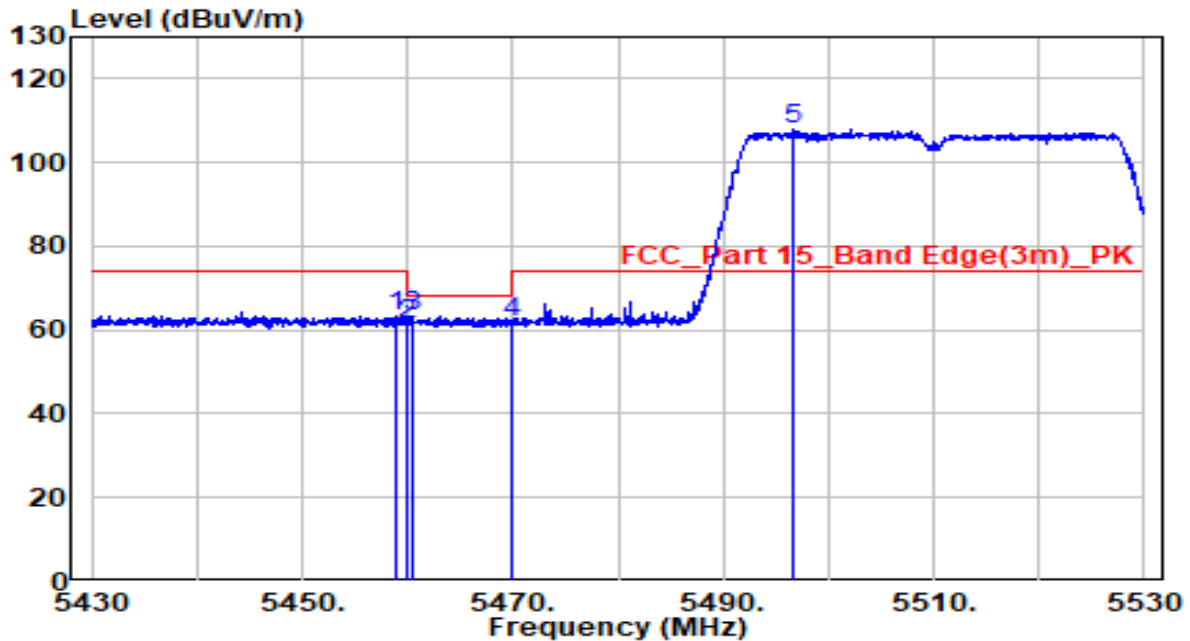


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.900	42.89	20.23	63.12	-10.88	74.00	Peak
2	5460.000	41.26	20.23	61.48	-6.72	68.20	Peak
3	5460.450	43.13	20.23	63.36	-4.84	68.20	Peak
4	5470.000	41.53	20.24	61.77	-6.43	68.20	Peak
5	* 5496.650	87.86	20.27	108.13	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ac-VHT40 at Channel 5510 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

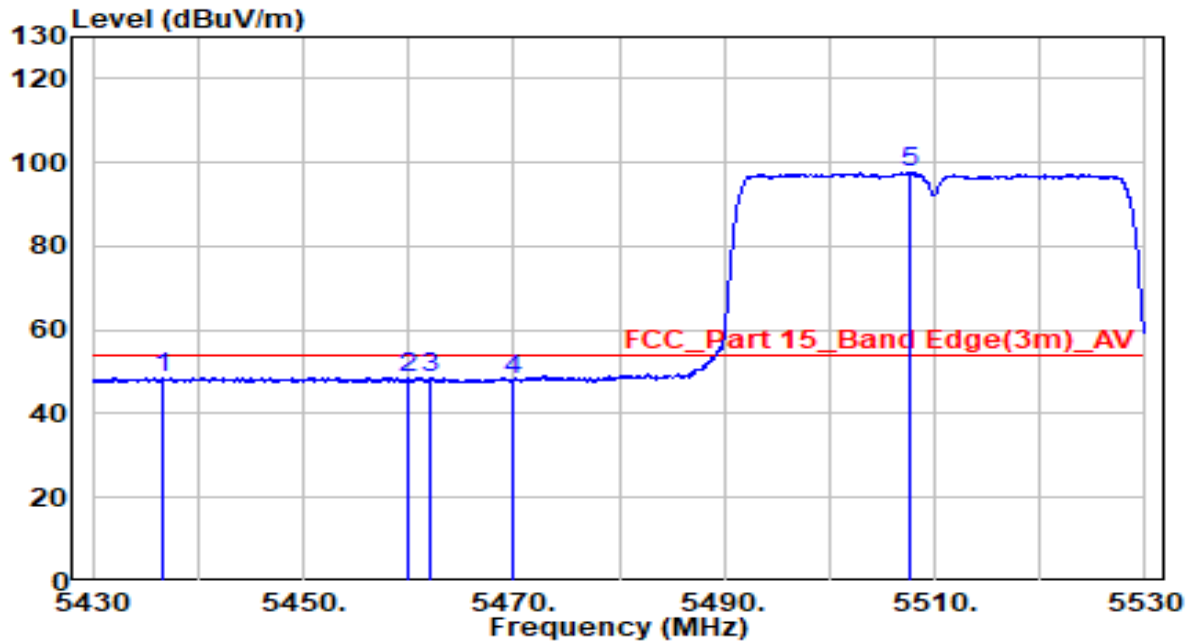


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5436.550	28.54	20.20	48.74	-5.26	54.00	Average
2	5460.000	28.10	20.23	48.33	-5.67	54.00	Average
3	5462.050	28.38	20.23	48.61	-5.39	54.00	Average
4	5470.000	27.75	20.24	47.99	-6.01	54.00	Average
5	* 5507.750	77.45	20.30	97.75	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ac-VHT40 at Channel 5510 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

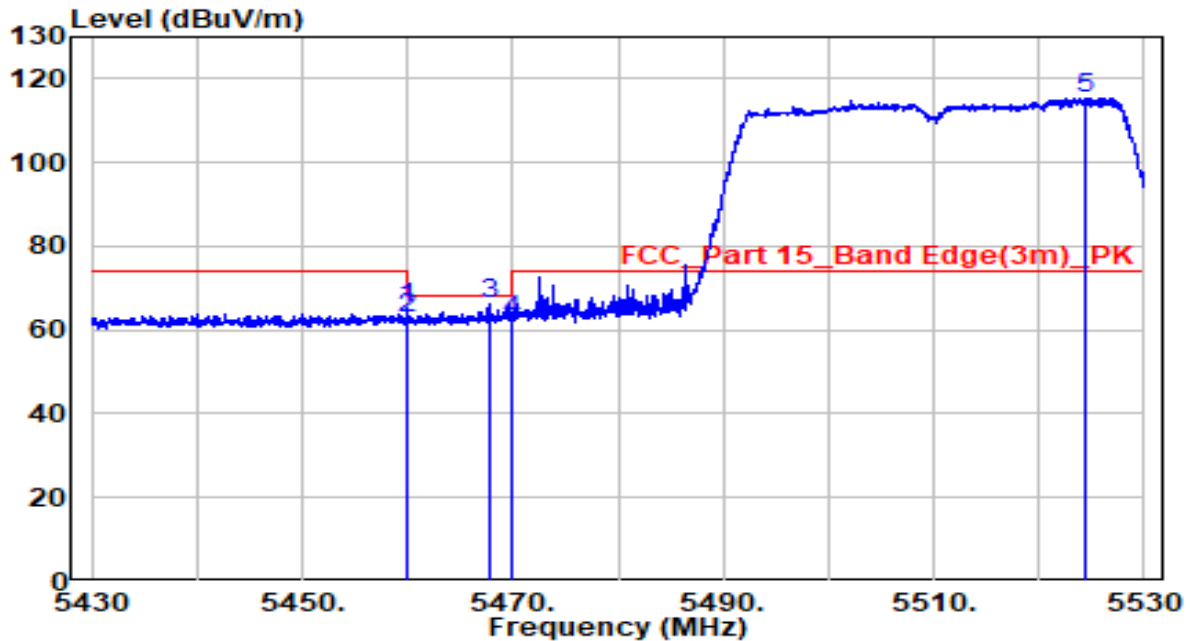


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5459.900	44.91	20.23	65.14	-8.86	74.00	Peak
2	5460.000	42.59	20.23	62.81	-5.39	68.20	Peak
3	5467.700	45.90	20.24	66.14	-2.06	68.20	Peak
4	5470.000	42.13	20.24	62.37	-5.83	68.20	Peak
5	* 5524.500	95.11	20.35	115.46	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ac-VHT40 at Channel 5510 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

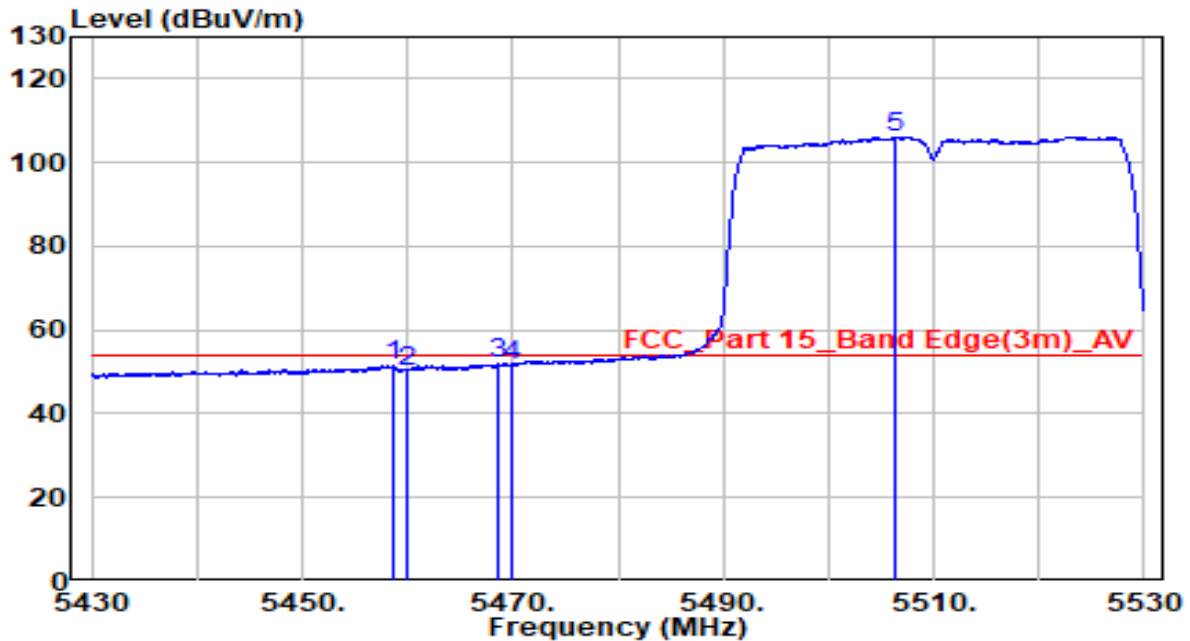


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.650	31.40	20.23	51.63	-2.37	54.00	Average
2	5460.000	30.02	20.23	50.25	-3.75	54.00	Average
3	5468.650	31.54	20.24	51.78	-2.22	54.00	Average
4	5470.000	31.51	20.24	51.75	-2.25	54.00	Average
5	* 5506.400	85.90	20.29	106.19	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ac-VHT40 at Channel 5670 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

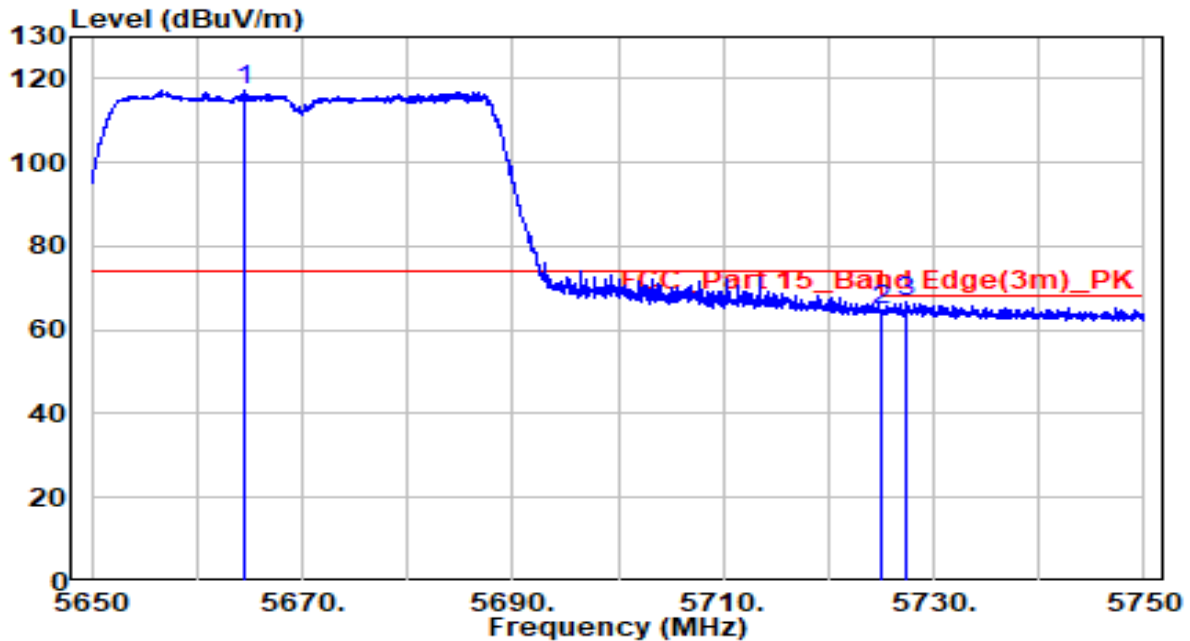


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5664.400	96.49	20.80	117.29	N/A	N/A	Peak
2		5725.000	43.86	21.00	64.85	-3.35	68.20	Peak
3		5727.450	45.56	21.01	66.57	-1.63	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ac-VHT40 at Channel 5670 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

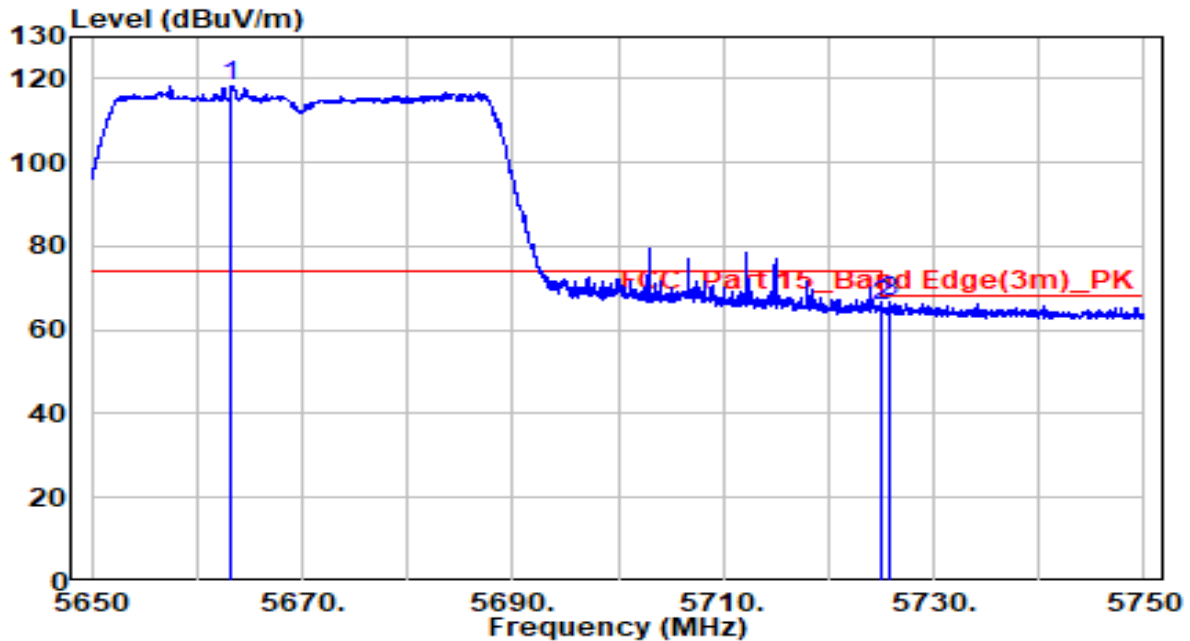


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5663.300	97.55	20.80	118.35	N/A	N/A	Peak
2		5725.000	44.63	21.00	65.63	-2.57	68.20	Peak
3		5725.850	45.55	21.00	66.55	-1.65	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5755 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

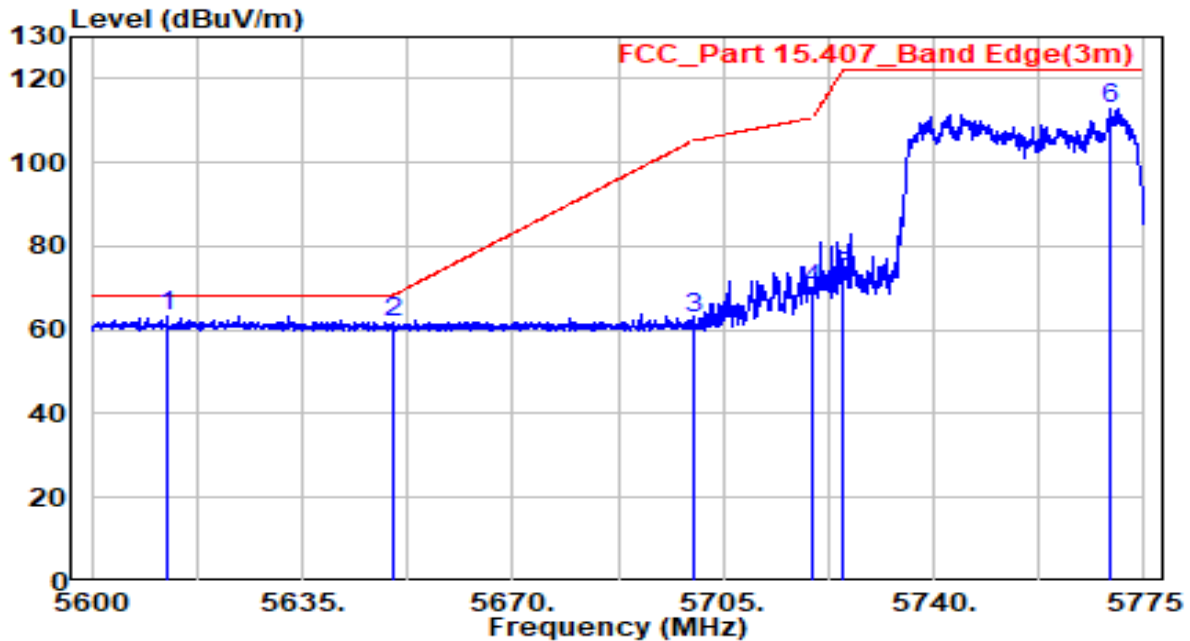


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5612.425	42.59	20.63	63.23	-4.97	68.20	Peak
2		5650.000	41.25	20.76	62.00	-6.20	68.20	Peak
3		5700.000	41.89	20.92	62.81	-42.39	105.20	Peak
4		5720.000	48.72	20.98	69.70	-41.10	110.80	Peak
5		5725.000	51.43	21.00	72.43	-49.77	122.20	Peak
6		5769.400	91.78	21.14	112.92	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5755 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

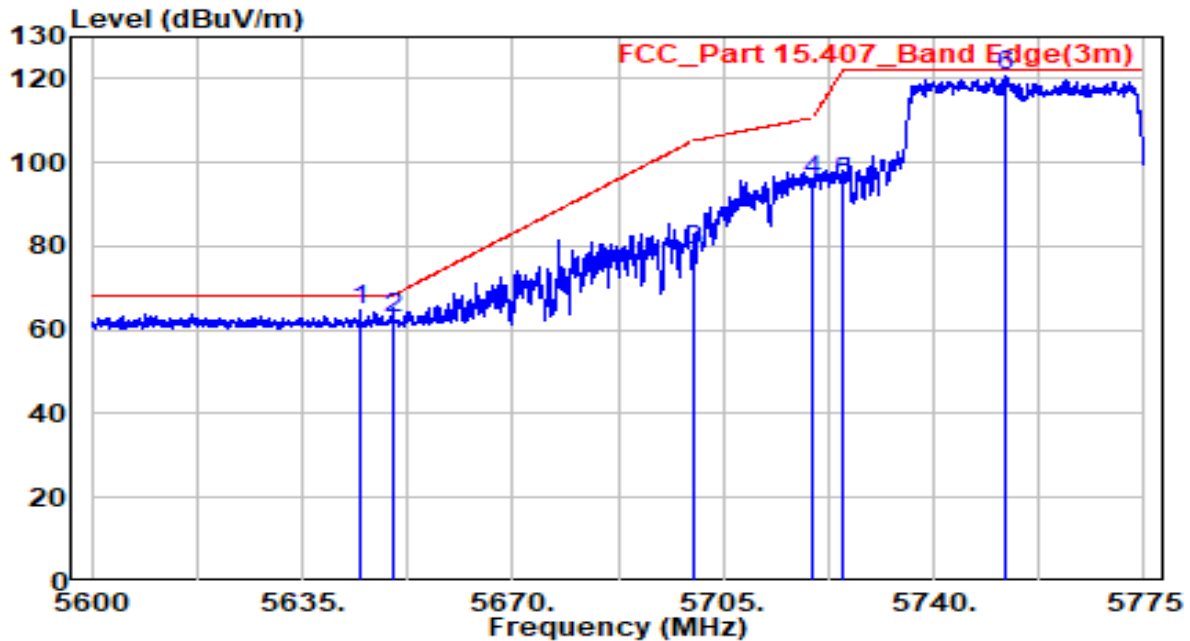


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5644.712	43.83	20.74	64.57	-3.63	68.20	Peak
2	5650.000	41.98	20.76	62.74	-5.46	68.20	Peak
3	5700.000	58.14	20.92	79.06	-26.14	105.20	Peak
4	5720.000	74.74	20.98	95.72	-15.08	110.80	Peak
5	5725.000	74.40	21.00	95.40	-26.80	122.20	Peak
6	* 5751.987	99.81	21.09	120.90	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5795 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

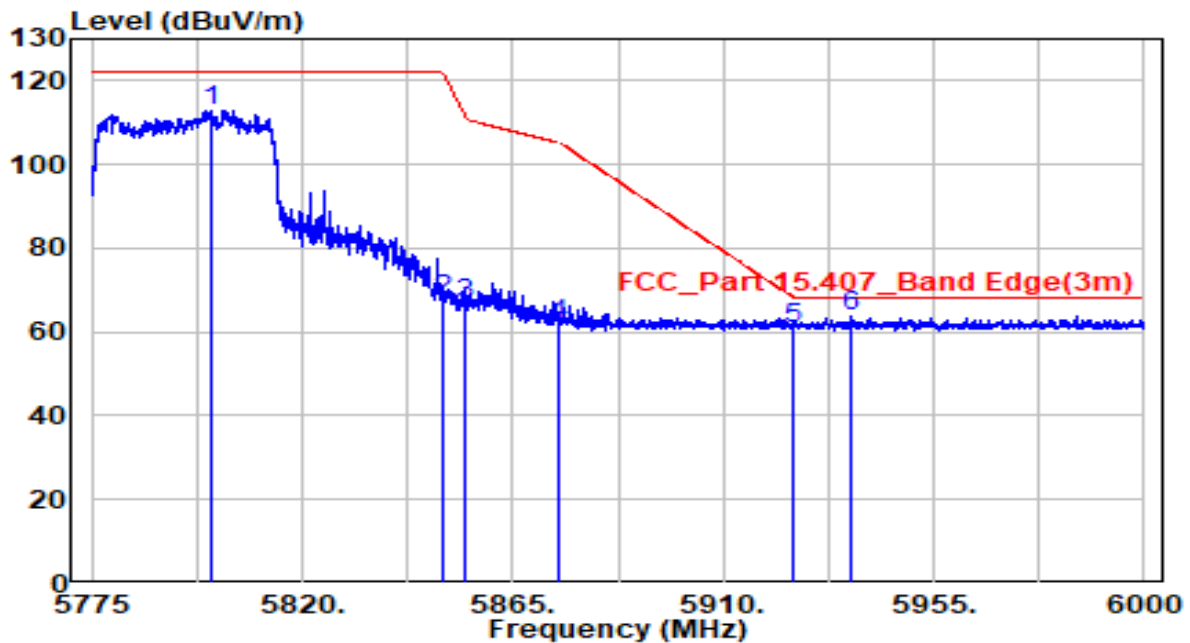


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5800.538	91.72	21.24	112.96	N/A	N/A	Peak
2	5850.000	46.36	21.40	67.76	-54.44	122.20	Peak
3	5855.000	45.29	21.42	66.71	-44.09	110.80	Peak
4	5875.000	40.27	21.49	61.76	-43.44	105.20	Peak
5	5925.000	39.11	21.65	60.76	-7.44	68.20	Peak
6	* 5937.563	41.84	21.69	63.53	-4.67	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT40 at channel 5795 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

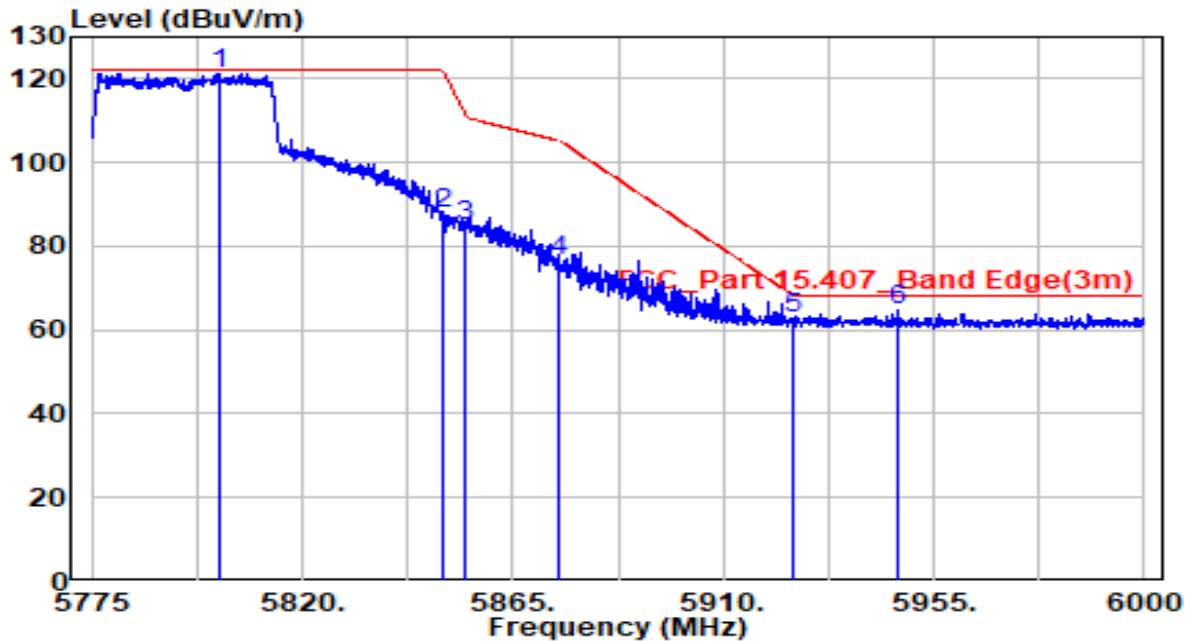


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5802.337	100.15	21.25	121.40	N/A	N/A	Peak
2		5850.000	66.28	21.40	87.68	-34.52	122.20	Peak
3		5855.000	63.26	21.42	84.68	-26.12	110.80	Peak
4		5875.000	55.03	21.49	76.52	-28.68	105.20	Peak
5		5925.000	41.05	21.65	62.70	-5.50	68.20	Peak
6		5947.575	43.24	21.72	64.96	-3.24	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac80 at Channel 5210 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

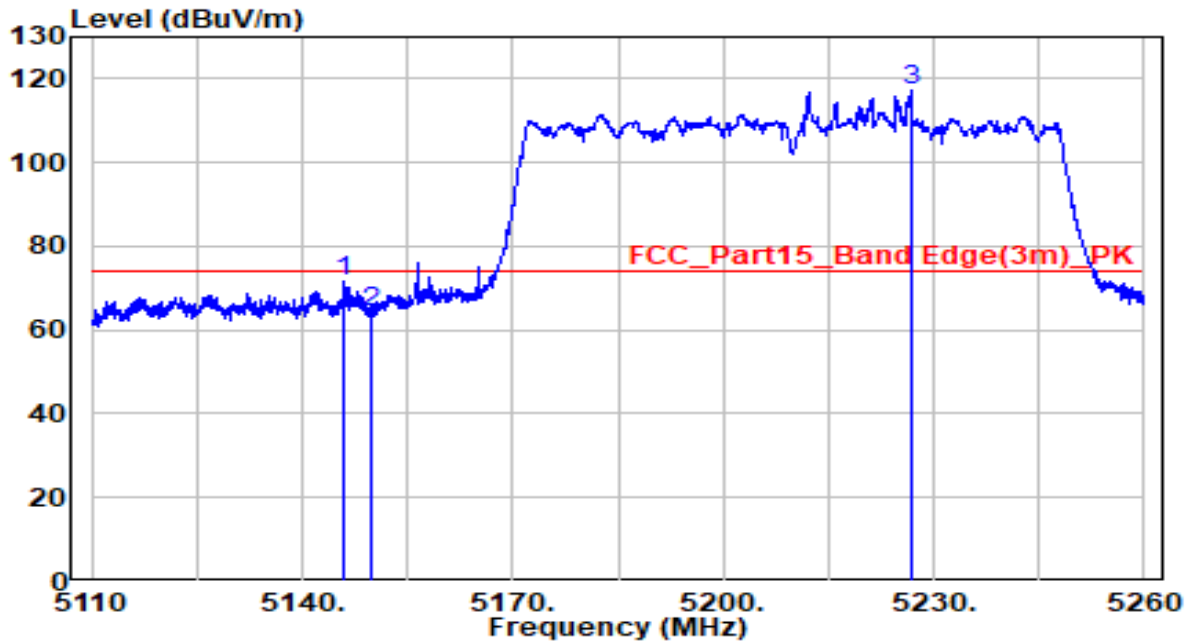


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5146.075	51.90	19.90	71.80	-2.20	74.00	Peak
2	5150.000	44.28	19.91	64.19	-9.81	74.00	Peak
3	* 5226.850	97.44	19.99	117.43	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac80 at Channel 5210 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

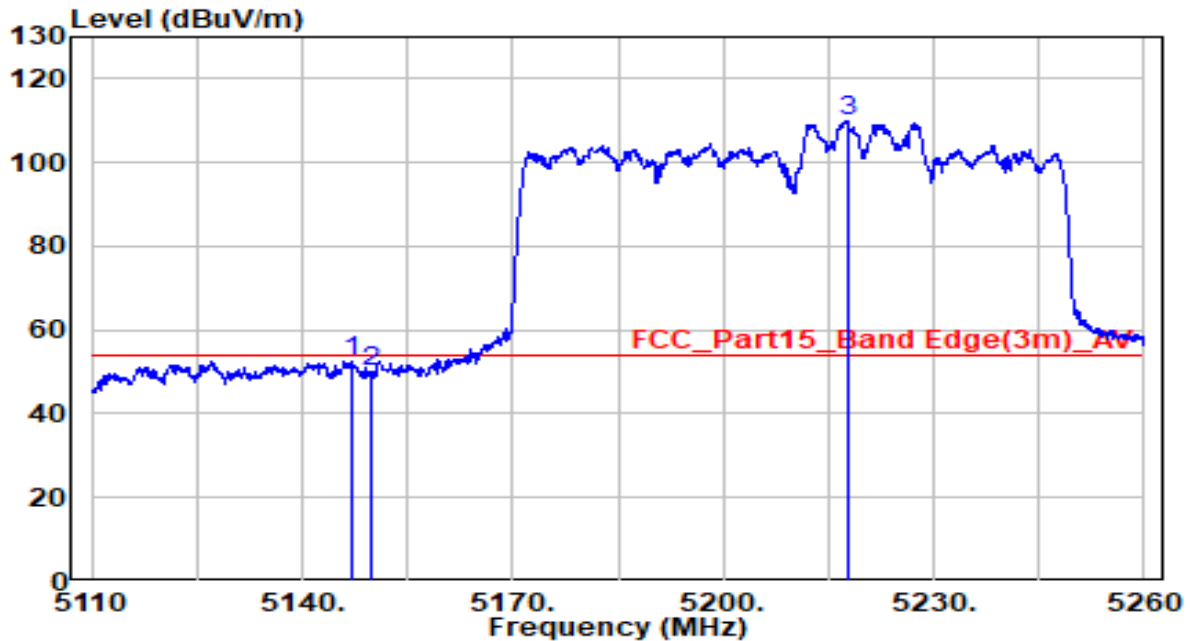


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5146.975	32.73	19.90	52.64	-1.36	54.00	Average
2	5149.975	30.22	19.91	50.12	-3.88	54.00	Average
3	* 5217.700	90.02	19.98	110.00	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac80 at Channel 5210 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

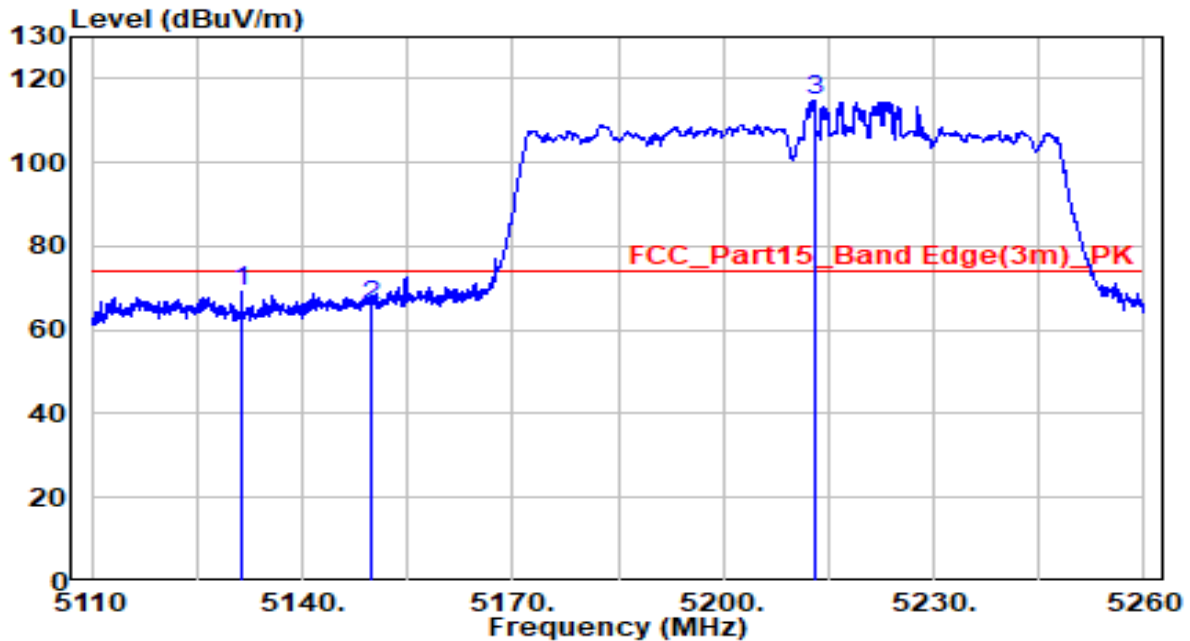


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5131.450	49.25	19.89	69.14	-4.86	74.00	Peak
2	5150.000	45.78	19.91	65.69	-8.31	74.00	Peak
3	* 5212.975	94.80	19.97	114.77	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac80 at Channel 5210 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

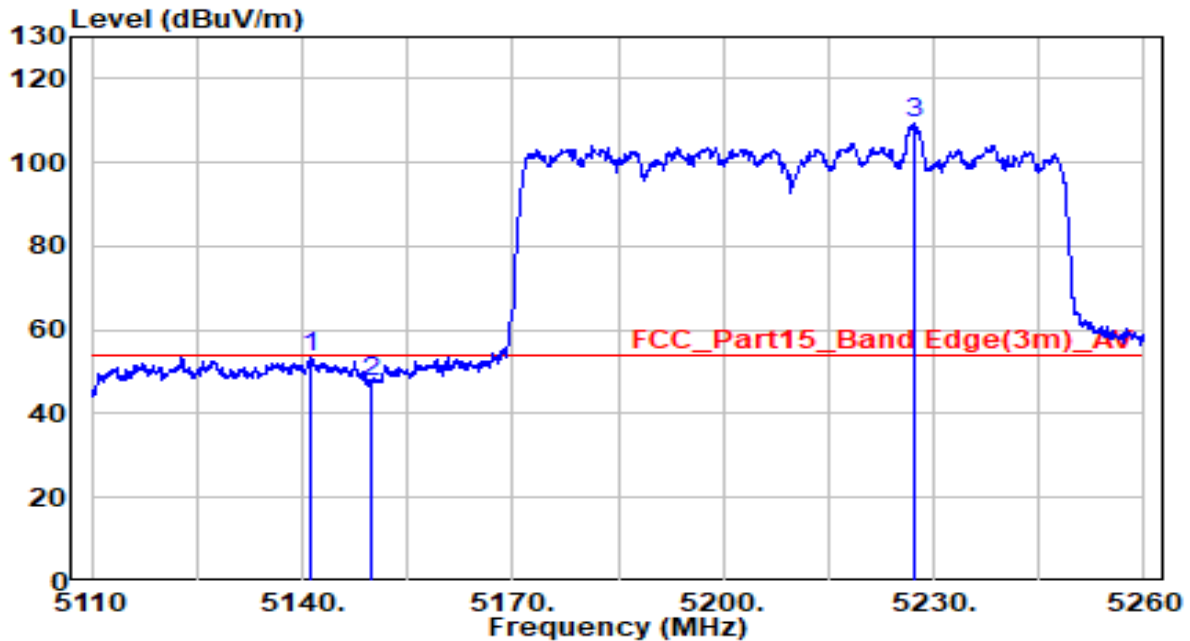


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5141.125	33.40	19.90	53.30	-0.70	54.00	Average
2	5149.975	27.75	19.91	47.66	-6.34	54.00	Average
3	* 5227.075	89.58	19.99	109.57	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ac-VHT80 at Channel 5530 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

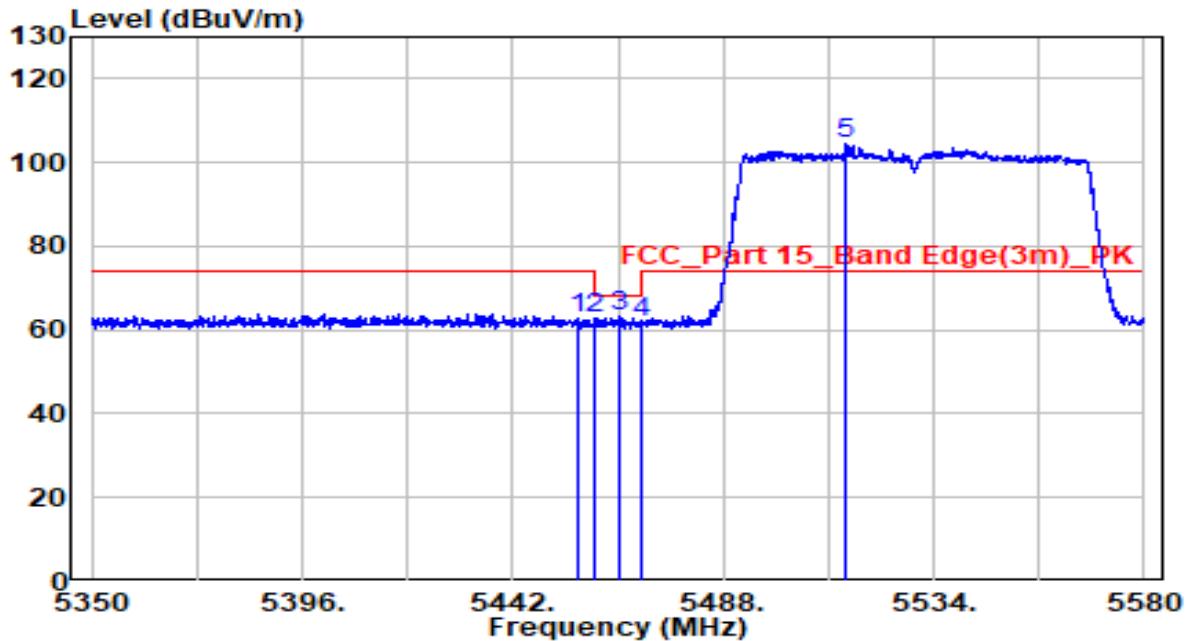


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5456.145	42.48	20.22	62.70	-11.30	74.00	Peak
2	5460.000	42.36	20.23	62.59	-5.61	68.20	Peak
3	5465.575	43.12	20.23	63.35	-4.85	68.20	Peak
4	5470.000	41.45	20.24	61.69	-6.51	68.20	Peak
5	* 5514.680	84.26	20.32	104.58	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ac-VHT80 at Channel 5530 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

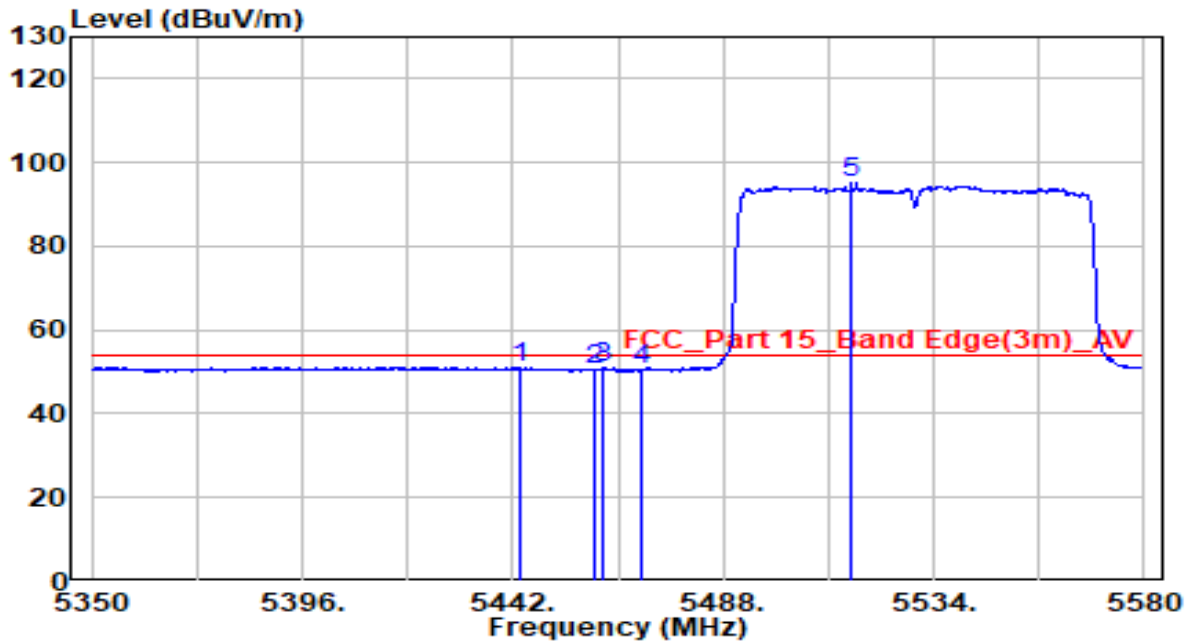


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5443.380	30.68	20.21	50.89	-3.11	54.00	Average
2	5460.000	30.40	20.23	50.62	-3.38	54.00	Average
3	5461.435	30.77	20.23	51.00	-3.00	54.00	Average
4	5470.000	30.14	20.24	50.38	-3.62	54.00	Average
5	* 5516.060	74.97	20.32	95.30	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ac-VHT80 at Channel 5530 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

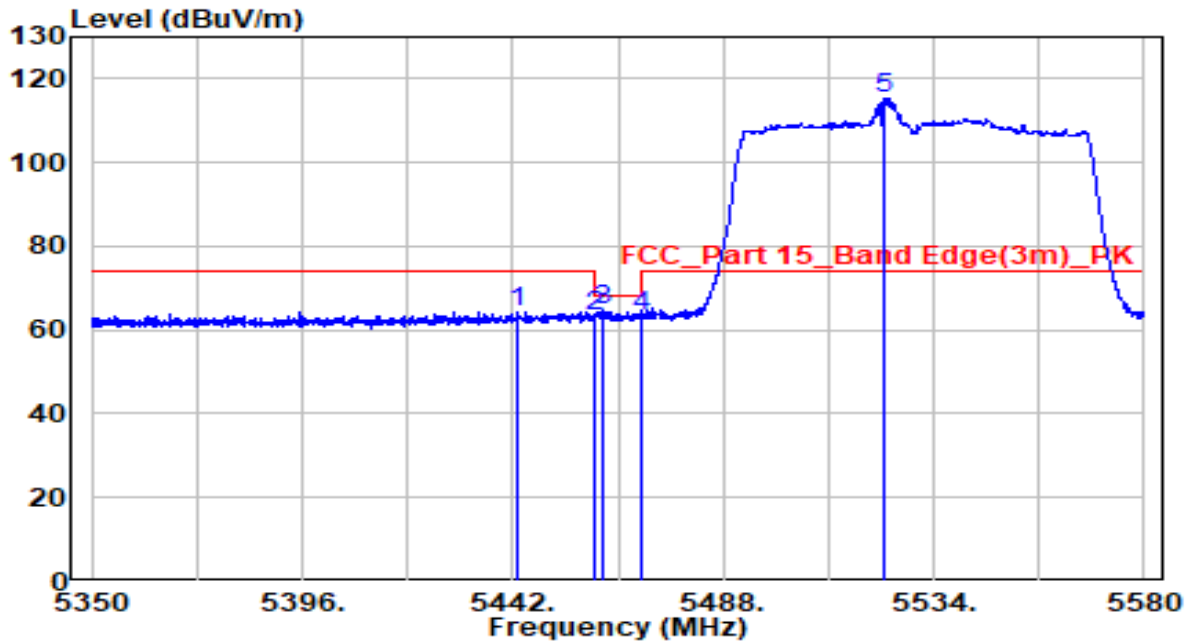


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5443.265	44.05	20.21	64.27	-9.73	74.00	Peak
2	5460.000	42.84	20.23	63.07	-5.13	68.20	Peak
3	5461.435	44.65	20.23	64.88	-3.32	68.20	Peak
4	5470.000	43.01	20.24	63.25	-4.95	68.20	Peak
5	* 5523.305	94.96	20.35	115.31	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ac-VHT80 at Channel 5530 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

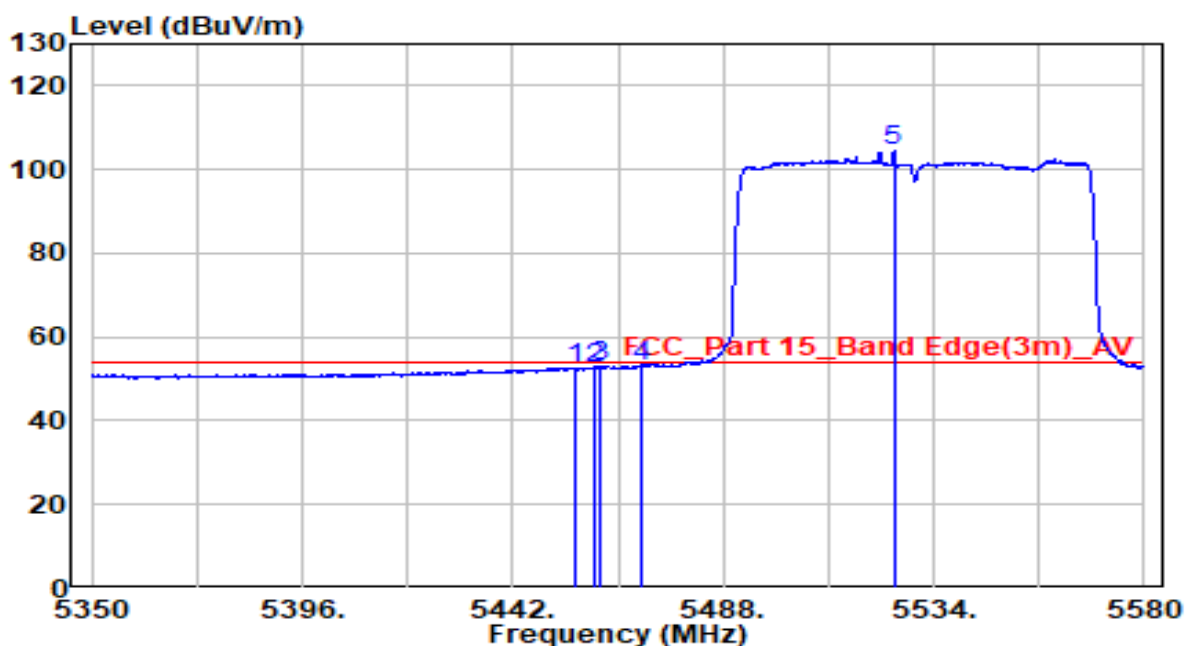


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5455.570	32.46	20.22	52.69	-1.31	54.00	Average
2	5460.000	32.33	20.23	52.56	-1.44	54.00	Average
3	5460.860	32.88	20.23	53.10	-0.90	54.00	Average
4	5470.000	32.72	20.24	52.96	-1.04	54.00	Average
5	* 5525.260	84.23	20.35	104.58	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ac-VHT80 at Channel 5610 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

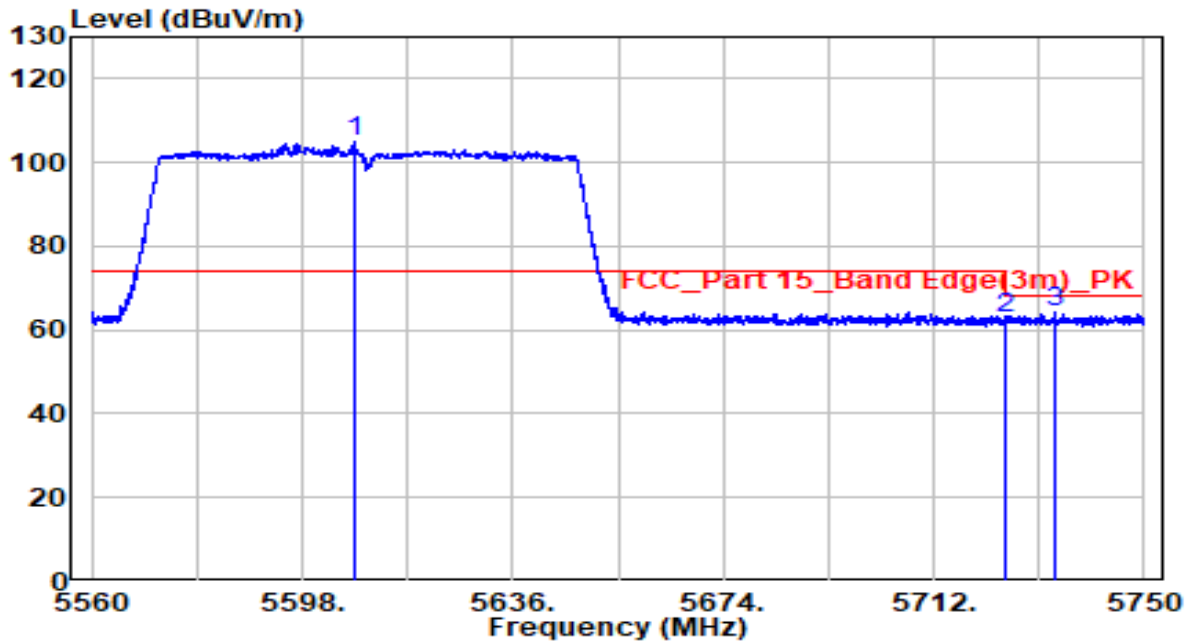


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5607.310	84.17	20.62	104.79	N/A	N/A	Peak
2		5725.000	41.89	21.00	62.89	-5.31	68.20	Peak
3		5734.135	43.10	21.03	64.13	-4.07	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ac-VHT80 at Channel 5610 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

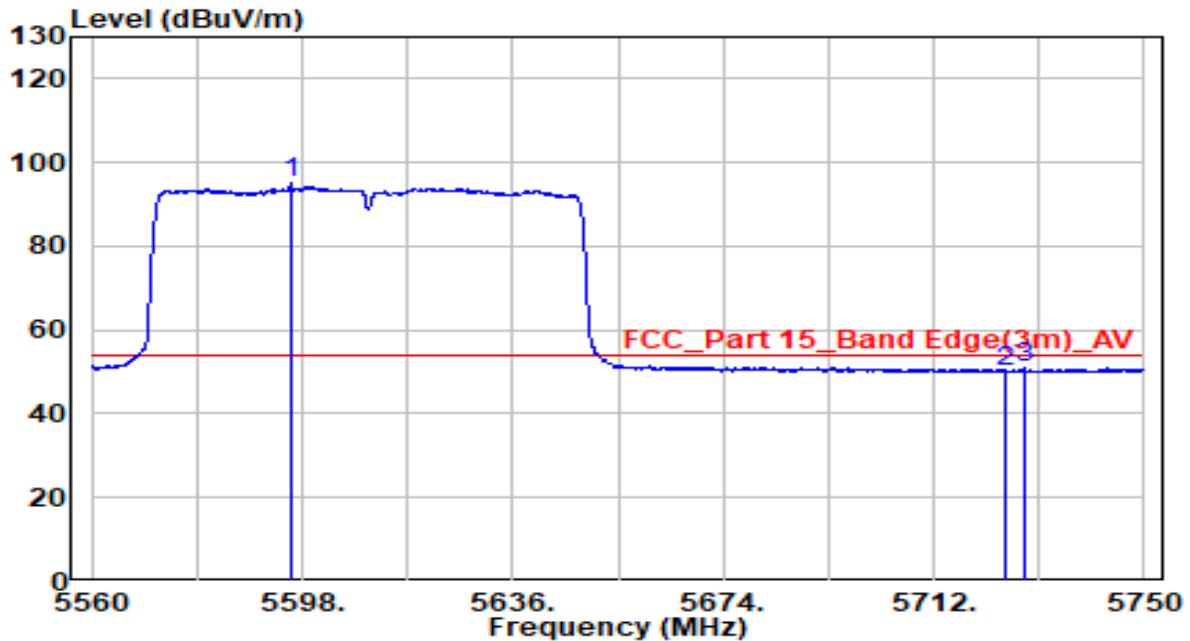


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5595.910	74.51	20.58	95.09	N/A	N/A	Average
2		5725.000	29.24	21.00	50.24	-3.76	54.00	Average
3		5728.245	29.81	21.01	50.82	-3.18	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ac-VHT80 at Channel 5610 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

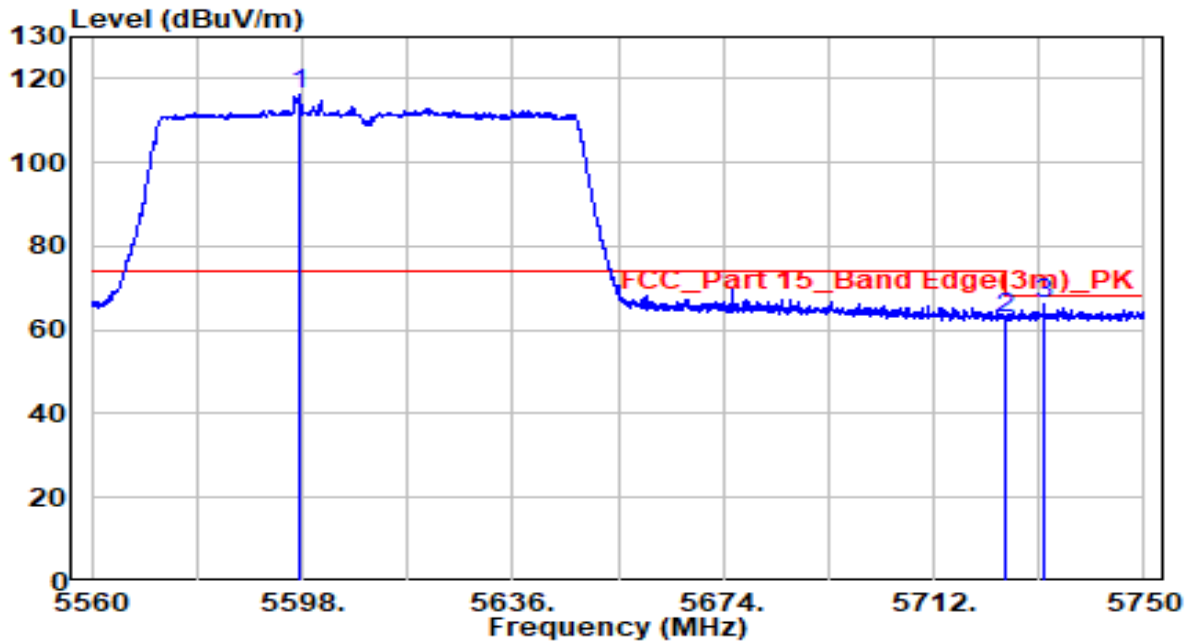


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5597.715	95.58	20.59	116.16	N/A	N/A	Peak
2		5725.000	41.76	21.00	62.76	-5.44	68.20	Peak
3		5731.855	45.05	21.02	66.07	-2.13	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ac-VHT80 at Channel 5610 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

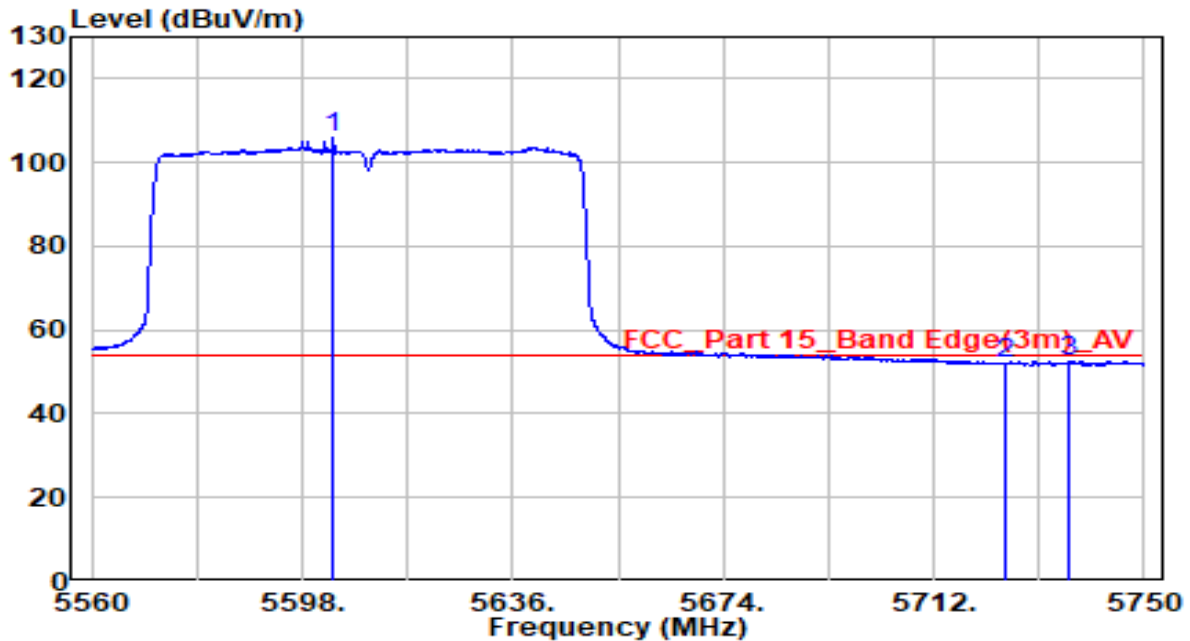


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5603.700	85.21	20.61	105.82	N/A	N/A	Average
2		5725.000	31.06	21.00	52.06	-1.94	54.00	Average
3		5736.415	31.59	21.04	52.63	-1.37	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ac-VHT80 at Channel 5775 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

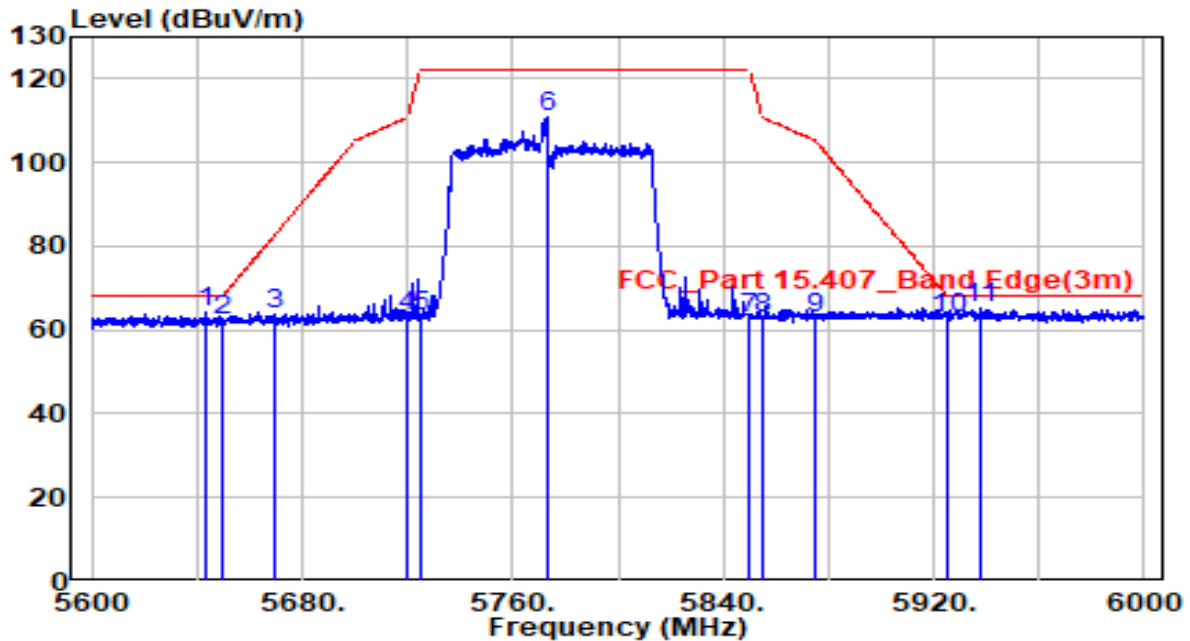

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5643.800	43.69	20.74	64.43	-3.77	68.20	Peak
2	5650.000	41.48	20.76	62.23	-5.97	68.20	Peak
3	5670.000	42.71	20.82	63.53	-19.51	83.04	Peak
4	5720.000	42.53	20.98	63.52	-47.28	110.80	Peak
5	5725.000	42.15	21.00	63.15	-59.05	122.20	Peak
6	5773.000	89.77	21.15	110.92	N/A	N/A	Peak
7	5850.000	41.52	21.40	62.92	-59.28	122.20	Peak
8	5855.000	41.52	21.42	62.94	-47.86	110.80	Peak
9	5875.000	41.47	21.49	62.95	-42.25	105.20	Peak
10	5925.000	41.30	21.65	62.95	-5.25	68.20	Peak
11	* 5937.600	43.33	21.69	65.02	-3.18	68.20	Peak

Note:


1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).

3. $\text{Measurement(dBuV/m)} = \text{Reading(dBuV)} + \text{C.F (Correction Factor)}$.

4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ac-VHT80 at Channel 5775 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

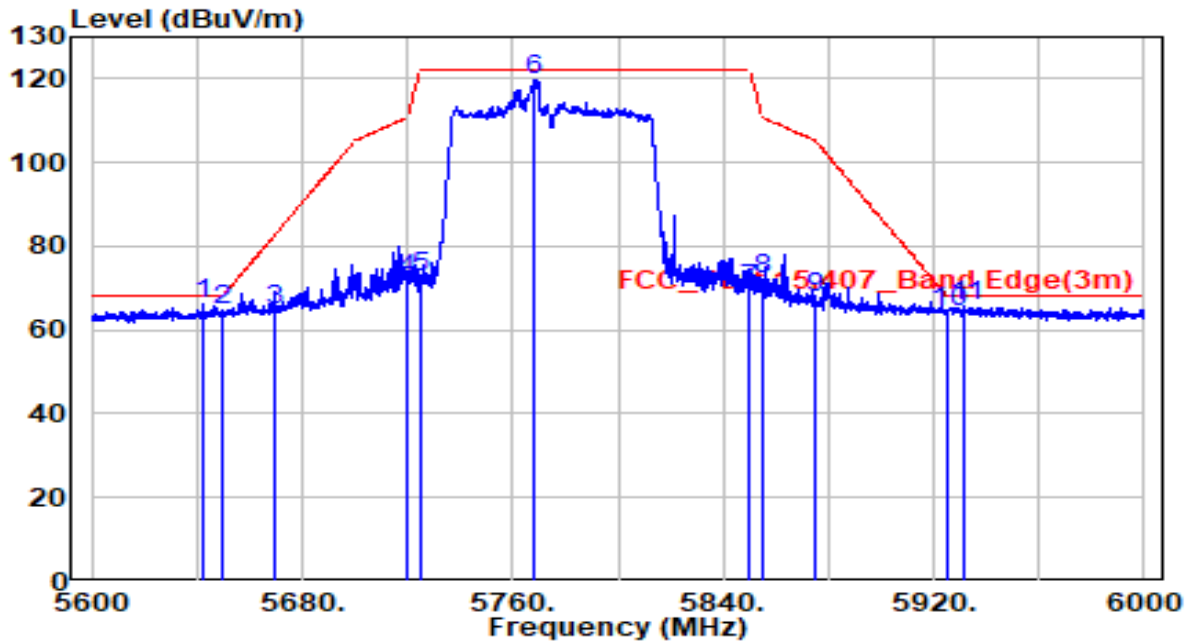

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5642.000	45.36	20.73	66.09	-2.11	68.20	Peak
2		5650.000	43.88	20.76	64.63	-3.57	68.20	Peak
3		5670.000	44.05	20.82	64.87	-18.17	83.04	Peak
4		5720.000	51.16	20.98	72.14	-38.66	110.80	Peak
5		5725.000	51.55	21.00	72.55	-49.65	122.20	Peak
6		5768.200	98.47	21.14	119.61	N/A	N/A	Peak
7		5850.000	48.46	21.40	69.87	-52.33	122.20	Peak
8		5855.000	50.92	21.42	72.34	-38.46	110.80	Peak
9		5875.000	46.44	21.49	67.92	-37.28	105.20	Peak
10		5925.000	42.54	21.65	64.18	-4.02	68.20	Peak
11		5932.000	43.85	21.67	65.52	-2.68	68.20	Peak

Note:


1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).

3. $\text{Measurement(dBuV/m)} = \text{Reading(dBuV)} + \text{C.F (Correction Factor)}$.

4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT160 at channel 5570MHz MHz(Beamforming Mode)	Test Voltage	120V/60Hz

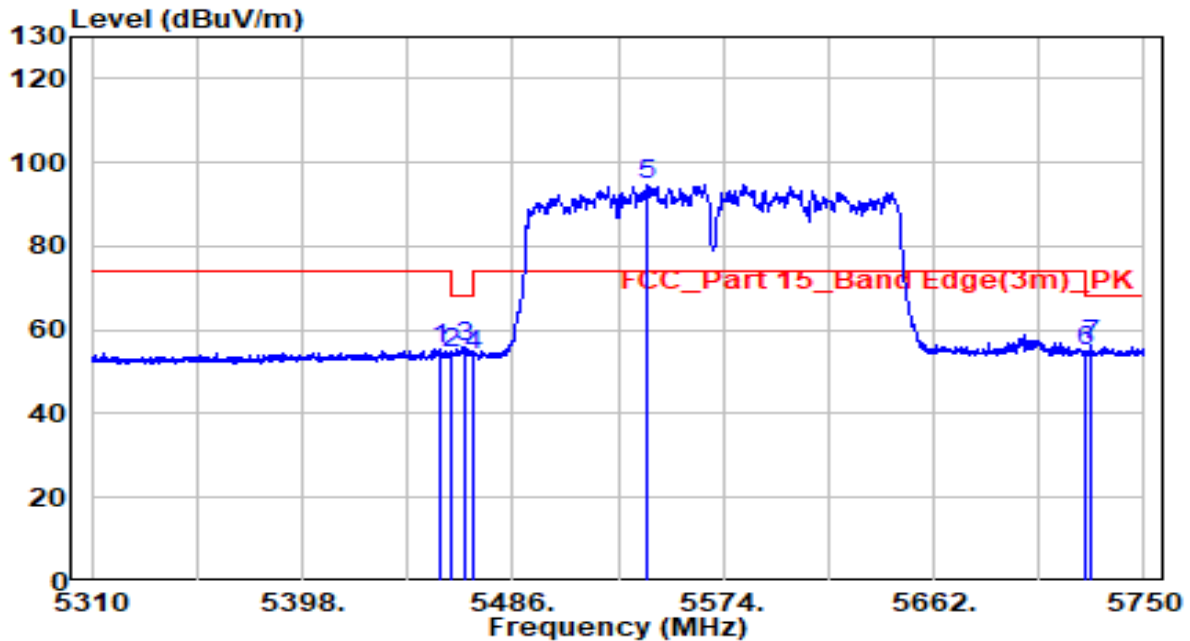


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5456.080	35.12	20.22	55.34	-18.66	74.00	Peak
2	5460.000	34.30	20.23	54.53	-13.67	68.20	Peak
3	5465.760	35.70	20.23	55.94	-12.26	68.20	Peak
4	5470.000	33.80	20.24	54.03	-14.17	68.20	Peak
5	* 5542.320	74.33	20.41	94.74	N/A	N/A	Peak
6	5725.000	33.77	21.00	54.77	-13.43	68.20	Peak
7	5727.780	35.62	21.01	56.63	-11.57	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT160 at channel 5570MHz MHz(Beamforming Mode)	Test Voltage	120V/60Hz

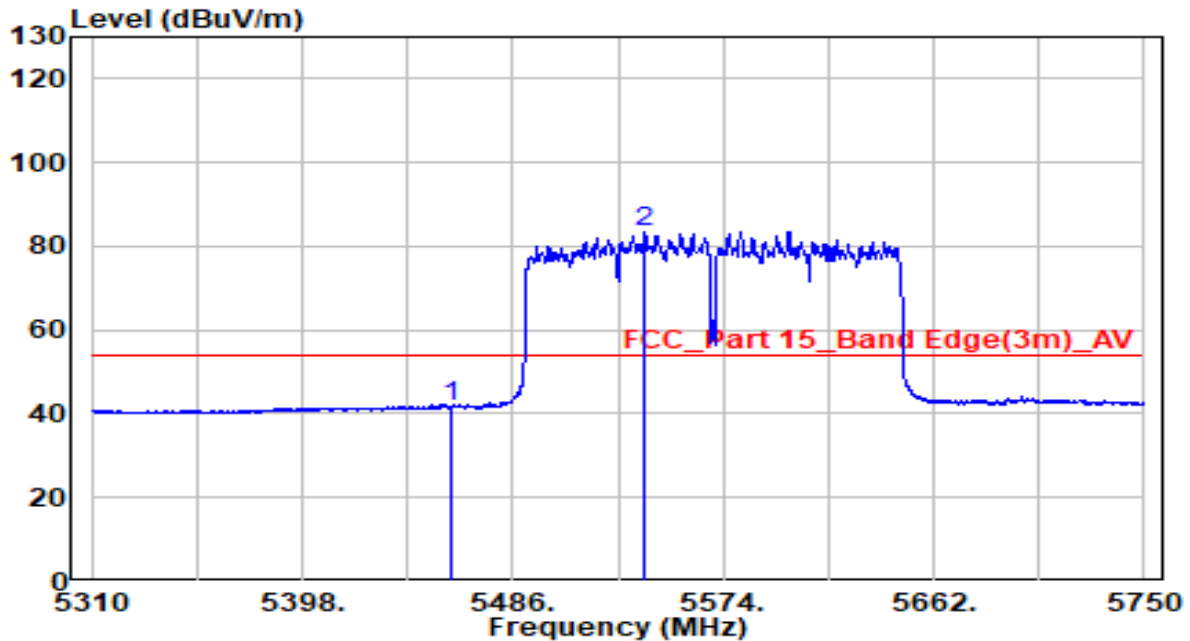


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.040	21.41	20.23	41.64	-12.36	54.00	Average
2	* 5541.220	63.06	20.40	83.47	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT160 at channel 5570MHz MHz(Beamforming Mode)	Test Voltage	120V/60Hz

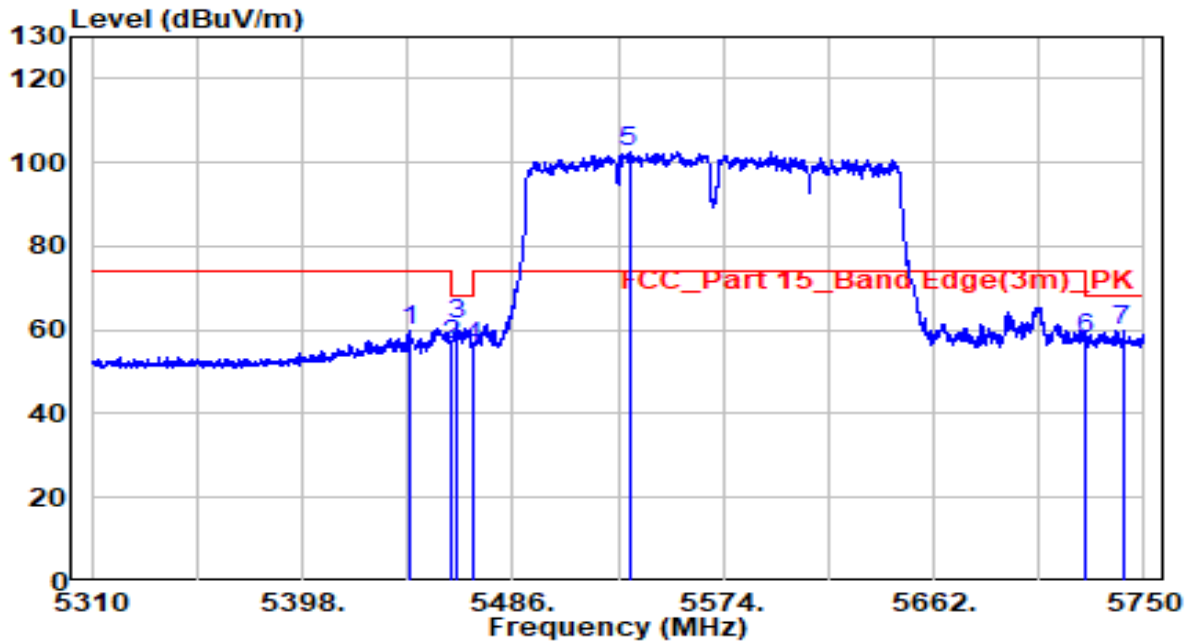


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5442.660	39.59	20.21	59.80	-14.20	74.00	Peak
2	5460.000	36.42	20.23	56.65	-11.55	68.20	Peak
3	5462.460	41.03	20.23	61.26	-6.94	68.20	Peak
4	5470.000	35.90	20.24	56.13	-12.07	68.20	Peak
5	* 5534.620	82.19	20.38	102.57	N/A	N/A	Peak
6	5725.000	36.89	21.00	57.89	-10.31	68.20	Peak
7	5740.980	38.92	21.05	59.98	-8.22	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ac-VHT160 at channel 5570MHz MHz(Beamforming Mode)	Test Voltage	120V/60Hz

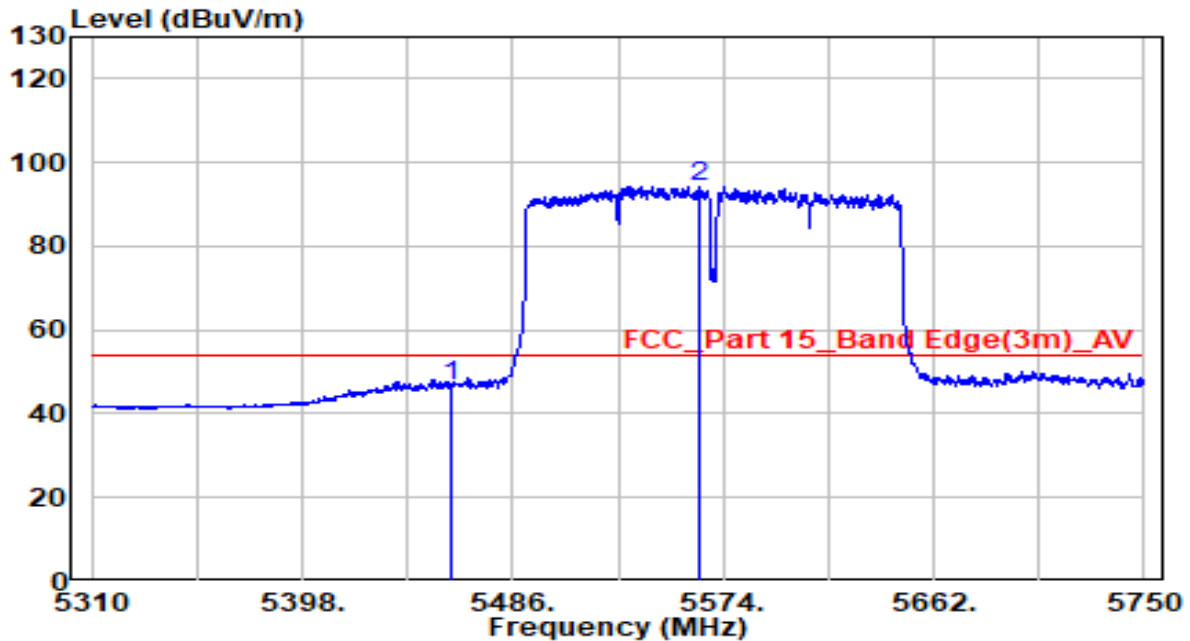


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	26.28	20.23	46.51	-7.49	54.00	Average
2	* 5564.320	73.75	20.48	94.23	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax20 at channel 5180MHz(Beamforming Mode)	Test Voltage	120V/60Hz

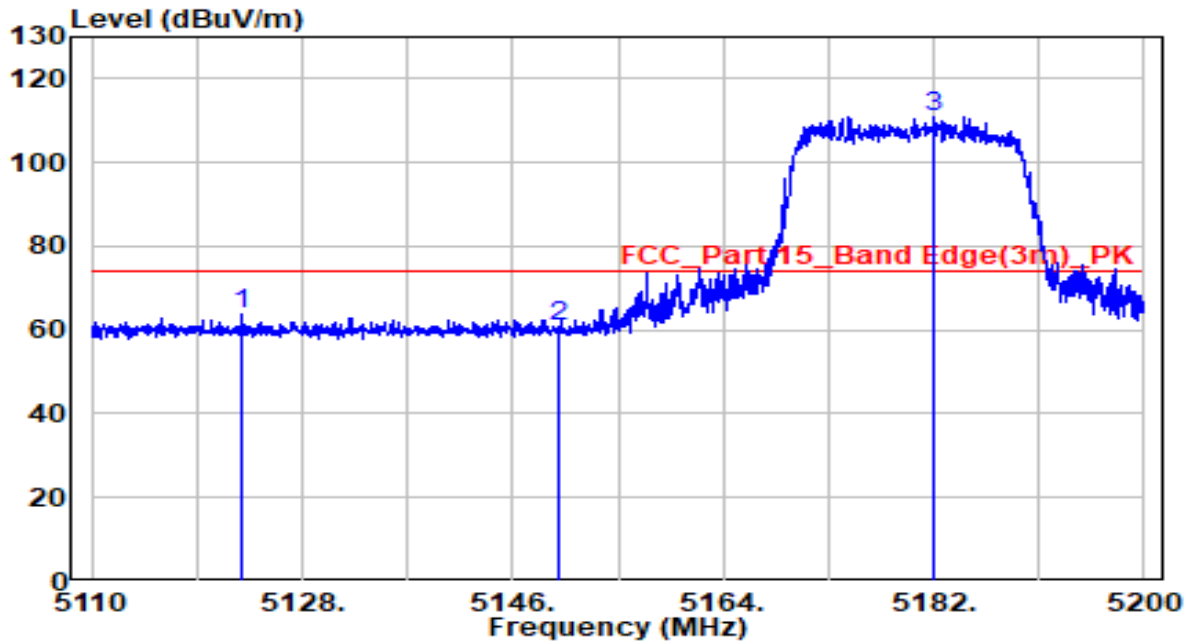


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5122.870	43.97	19.88	63.85	-10.15	74.00	Peak
2	5150.000	40.79	19.91	60.70	-13.30	74.00	Peak
3	* 5182.090	91.07	19.94	111.01	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax20 at channel 5180MHz(Beamforming Mode)	Test Voltage	120V/60Hz

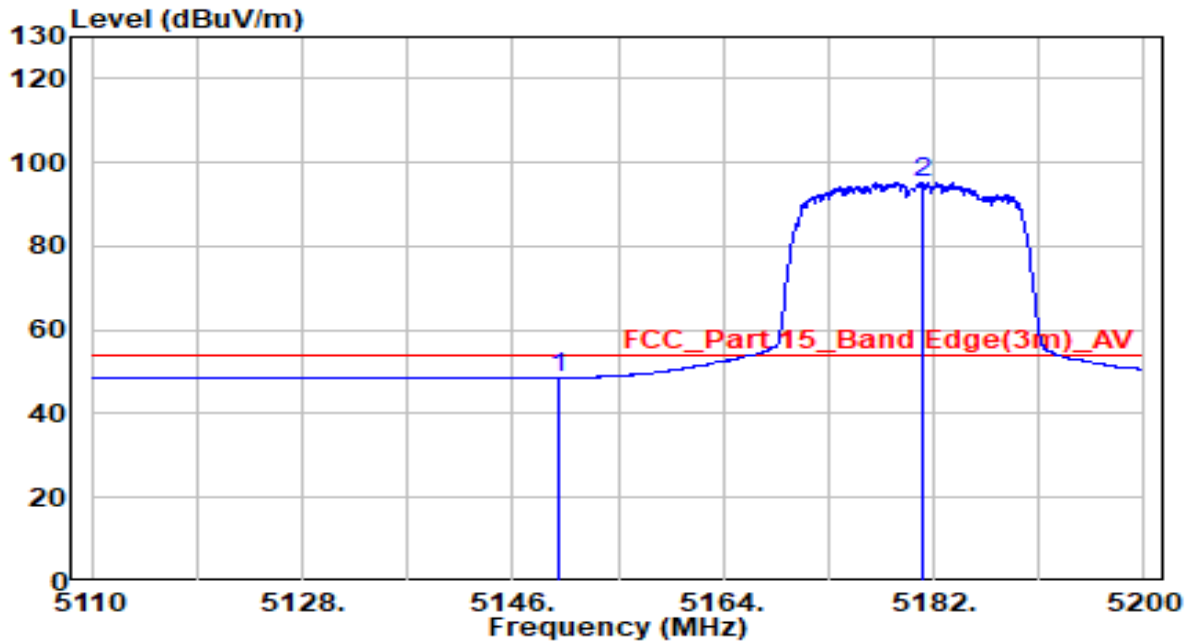


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	28.80	19.91	48.71	-5.29	54.00	Average
2	* 5180.965	75.30	19.94	95.24	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax20 at channel 5180MHz(Beamforming Mode)	Test Voltage	120V/60Hz

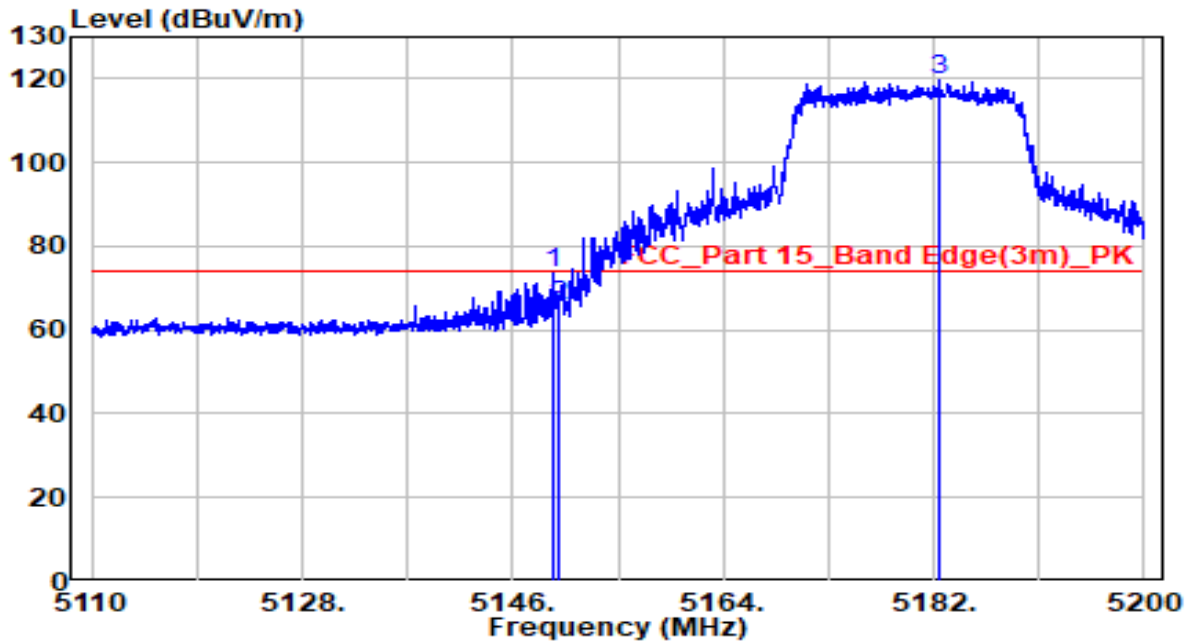


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.420	53.85	19.91	73.76	-0.24	74.00	Peak
2	5150.000	46.06	19.91	65.97	-8.03	74.00	Peak
3	* 5182.360	99.53	19.94	119.47	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax20 at channel 5180MHz(Beamforming Mode)	Test Voltage	120V/60Hz

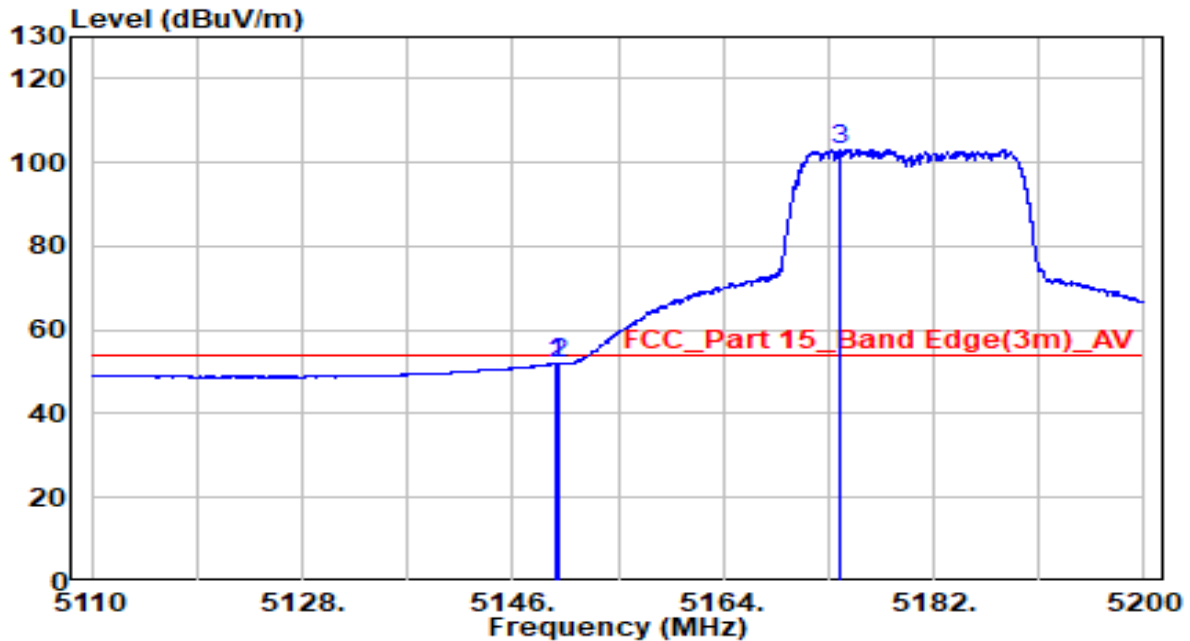


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.690	32.01	19.91	51.92	-2.08	54.00	Average
2	5150.005	31.96	19.91	51.87	-2.13	54.00	Average
3	* 5174.035	83.32	19.93	103.25	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ax-HE20 at Channel 5500 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

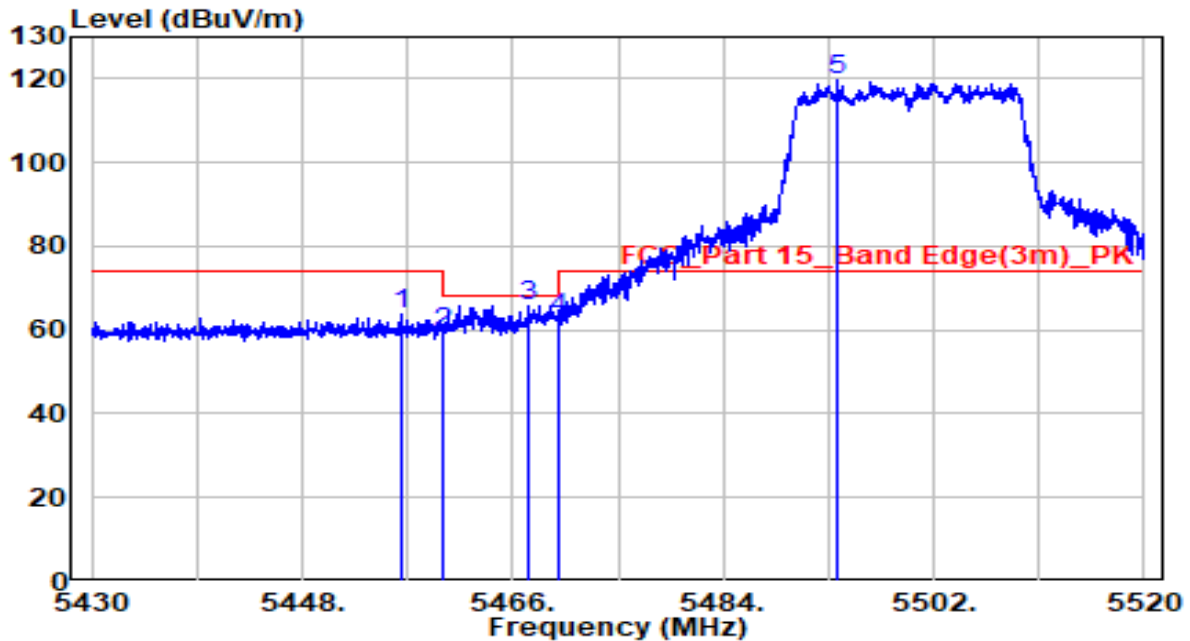


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5456.460	43.76	20.22	63.98	-10.02	74.00	Peak
2	5460.000	38.94	20.23	59.17	-9.03	68.20	Peak
3	5467.395	45.67	20.24	65.90	-2.30	68.20	Peak
4	5470.000	42.33	20.24	62.57	-5.63	68.20	Peak
5	* 5493.810	99.35	20.26	119.61	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ax-HE20 at Channel 5500 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

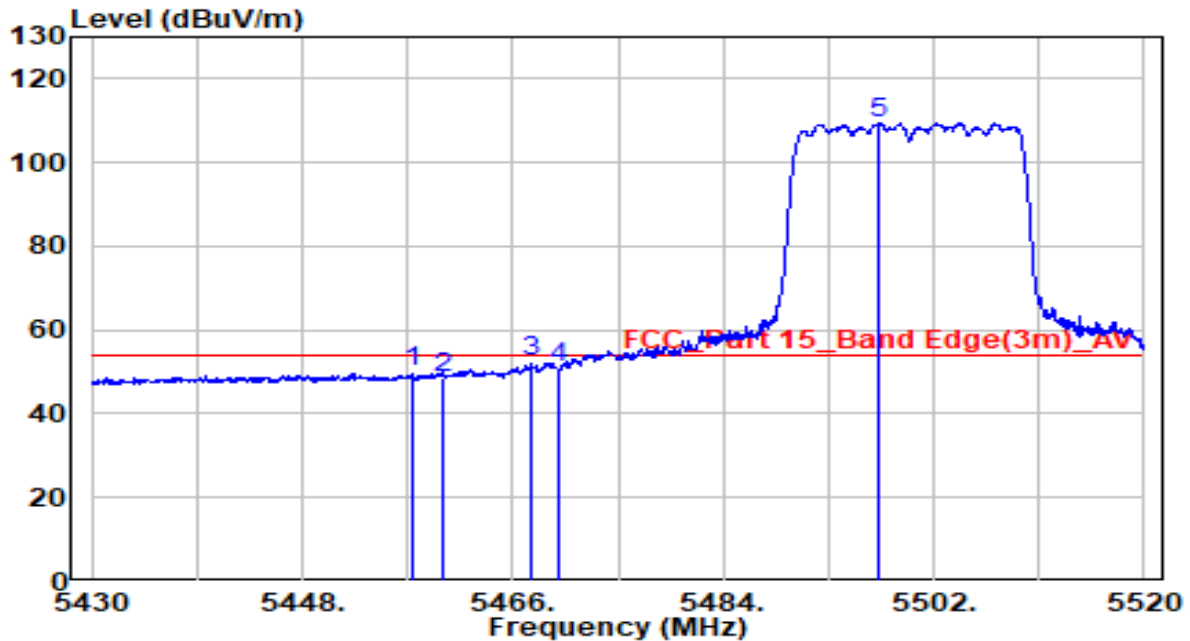


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5457.405	29.58	20.23	49.80	-4.20	54.00	Average
2	5460.015	28.48	20.23	48.71	-5.29	54.00	Average
3	5467.620	32.21	20.24	52.44	-1.56	54.00	Average
4	5470.000	30.57	20.24	50.81	-3.19	54.00	Average
5	* 5497.320	89.30	20.27	109.56	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ax-HE20 at Channel 5500 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

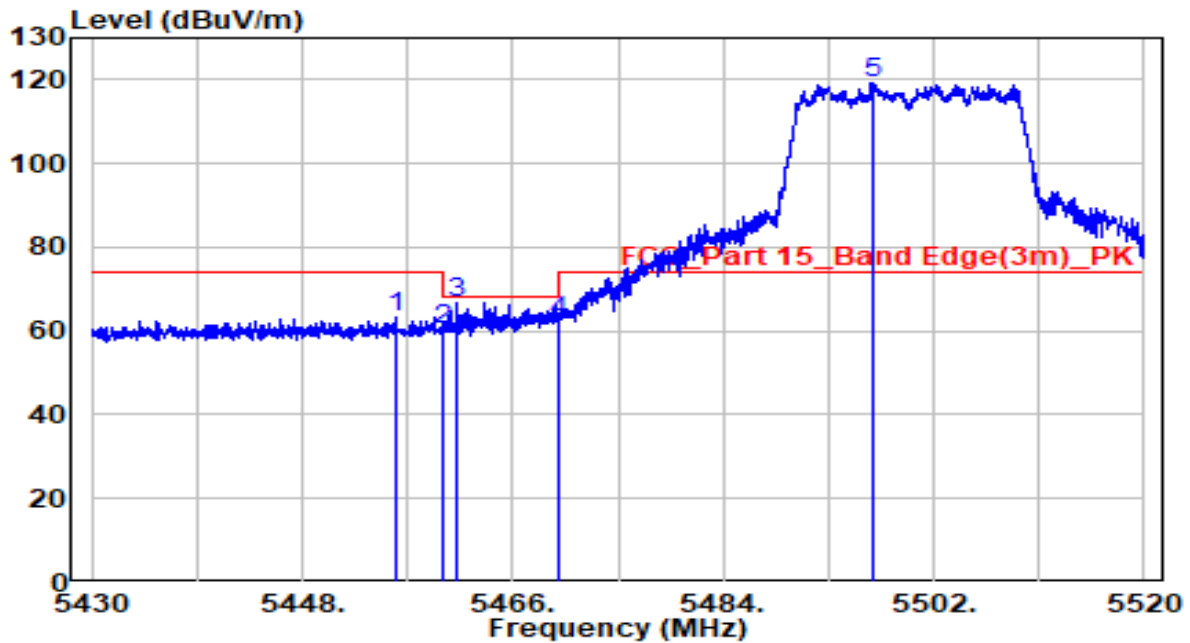


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5456.010	43.13	20.22	63.35	-10.65	74.00	Peak
2	5460.000	40.34	20.23	60.57	-7.63	68.20	Peak
3	* 5461.185	46.59	20.23	66.82	-1.38	68.20	Peak
4	5470.000	41.93	20.24	62.17	-6.03	68.20	Peak
5	* 5496.915	99.16	20.27	119.43	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ax-HE20 at Channel 5500 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

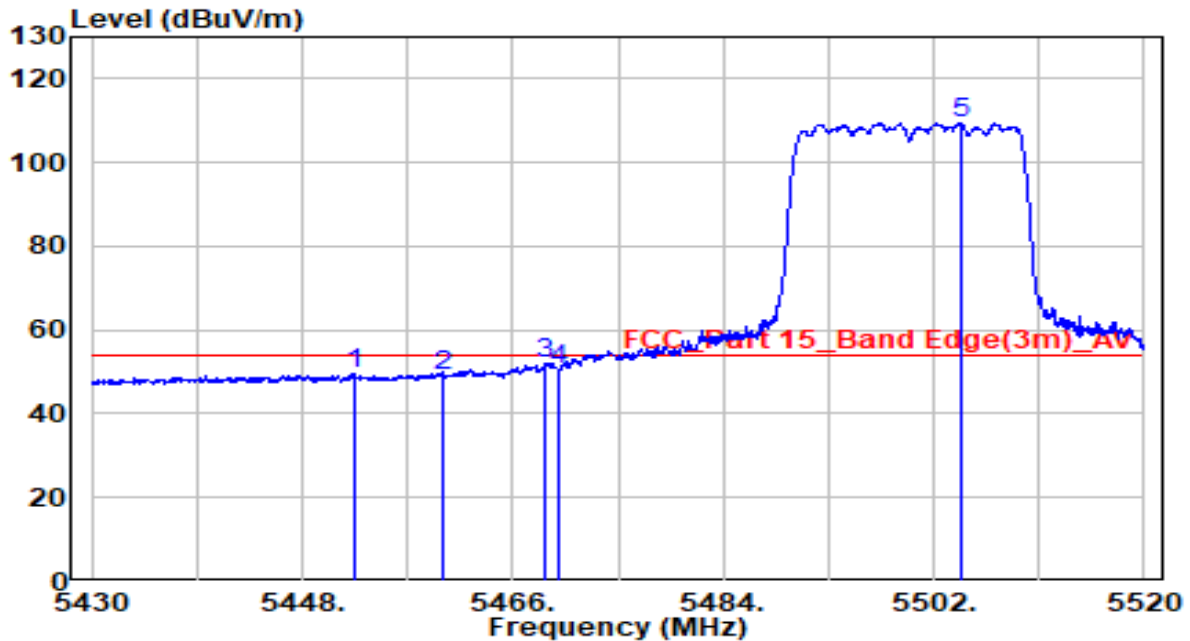


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5452.410	29.30	20.22	49.52	-4.48	54.00	Average
2	5460.000	28.93	20.23	49.15	-4.85	54.00	Average
3	5468.835	31.99	20.24	52.22	-1.78	54.00	Average
4	5470.000	30.31	20.24	50.54	-3.46	54.00	Average
5	* 5504.250	89.06	20.28	109.34	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ax-HE20 at Channel 5700 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

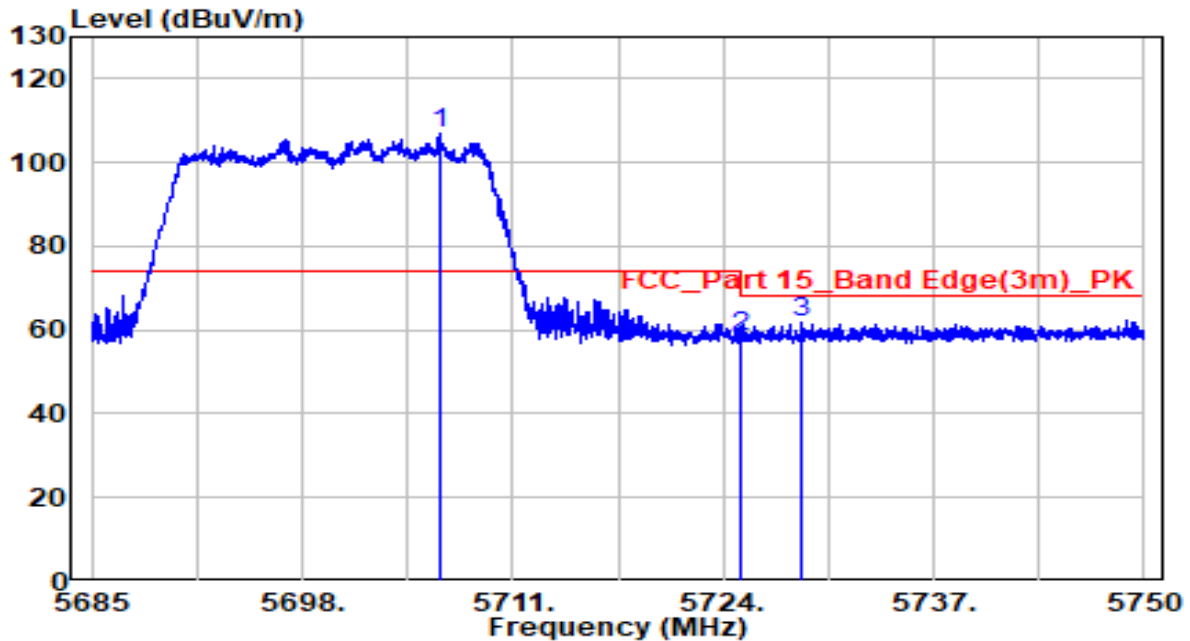


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5706.482	86.23	20.94	107.17	N/A	N/A	Peak
2		5725.000	37.15	21.00	58.15	-10.05	68.20	Peak
3		5728.908	40.62	21.01	61.63	-6.57	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ax-HE20 at Channel 5700 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

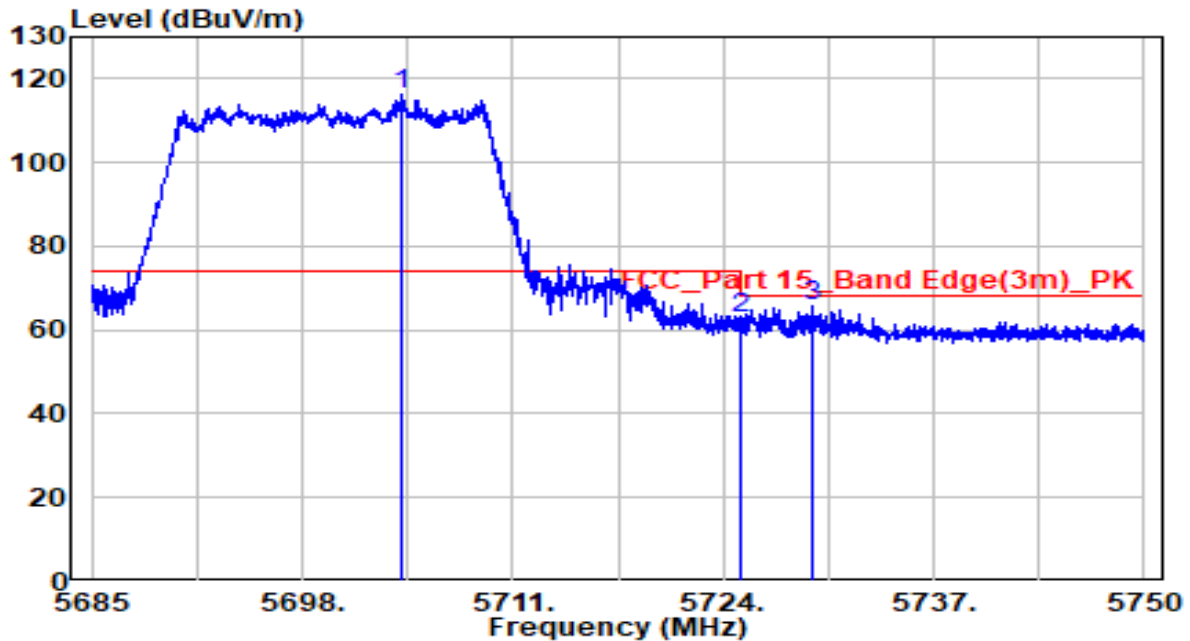


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5704.208	95.14	20.93	116.07	N/A	N/A	Peak
2		5725.000	41.67	21.00	62.67	-5.53	68.20	Peak
3		5729.460	44.71	21.01	65.72	-2.48	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ax-HE20 at Channel 5745 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

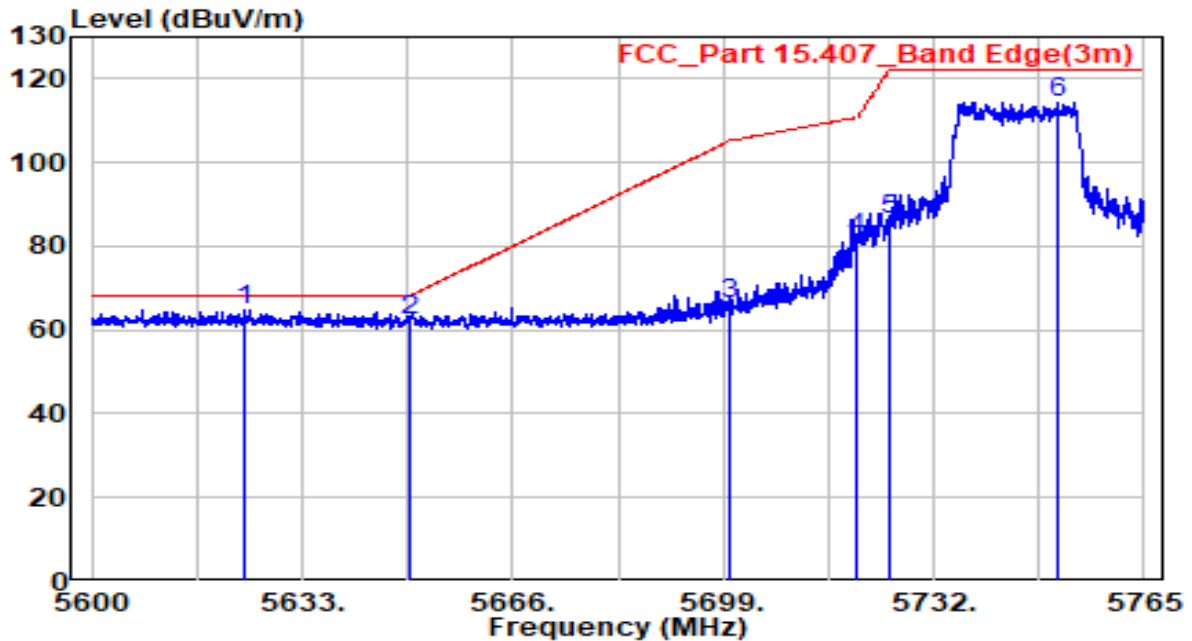


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5624.090	44.16	20.67	64.83	-3.37	68.20	Peak
2		5650.000	41.35	20.76	62.10	-6.10	68.20	Peak
3		5700.000	45.11	20.92	66.02	-39.18	105.20	Peak
4		5720.000	61.03	20.98	82.02	-28.78	110.80	Peak
5		5725.000	65.24	21.00	86.24	-35.96	122.20	Peak
6		5751.388	93.44	21.08	114.53	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ax-HE20 at Channel 5745 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

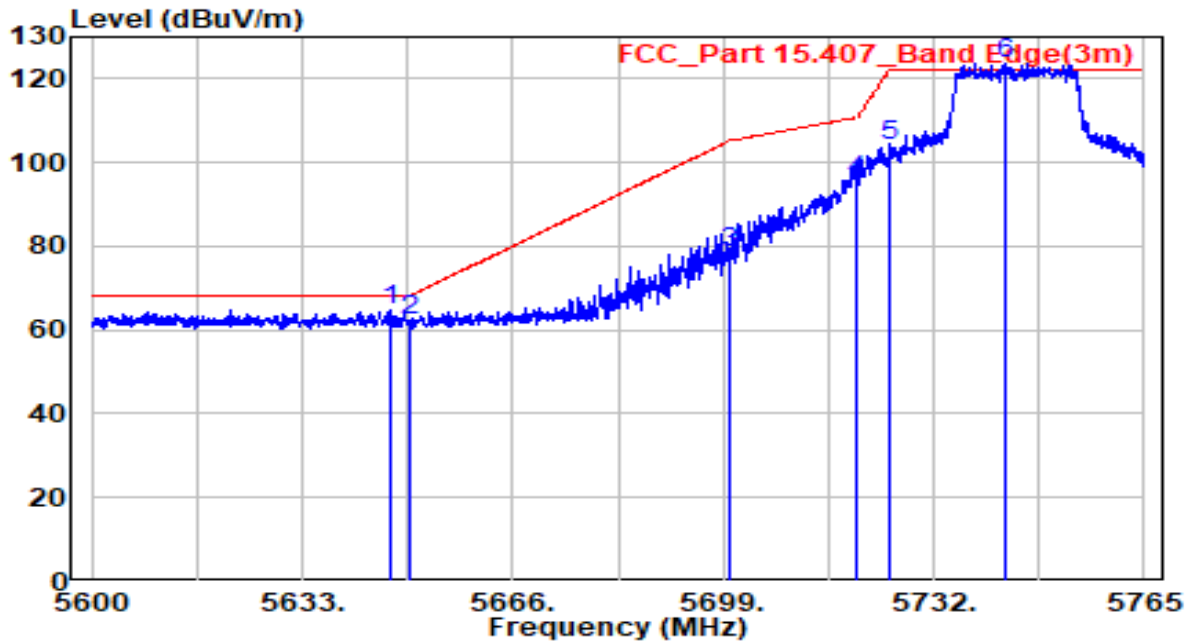


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5647.025	44.12	20.75	64.87	-3.33	68.20	Peak
2	5650.000	41.52	20.76	62.27	-5.93	68.20	Peak
3	5700.000	57.68	20.92	78.60	-26.60	105.20	Peak
4	5720.000	74.54	20.98	95.52	-15.28	110.80	Peak
5	5725.000	83.24	21.00	104.23	-17.97	122.20	Peak
6	* 5743.055	102.52	21.06	123.58	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ax-HE20 at Channel 5825 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

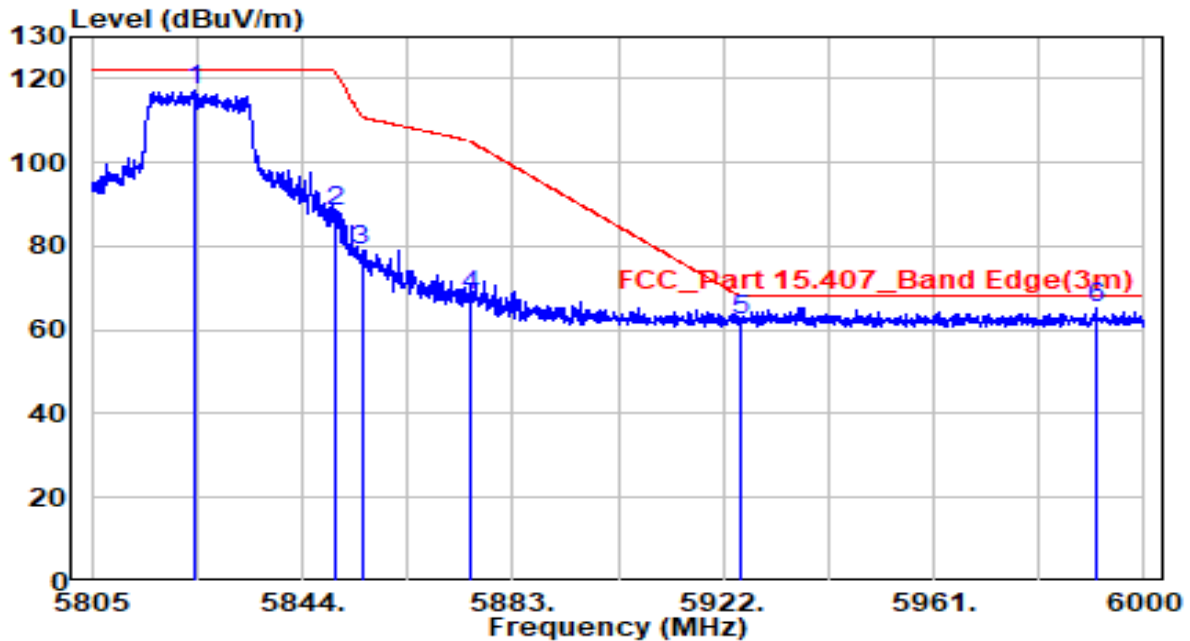


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5824.305	95.73	21.32	117.05	N/A	N/A	Peak
2	5850.000	66.82	21.40	88.22	-33.98	122.20	Peak
3	5855.000	57.65	21.42	79.07	-31.73	110.80	Peak
4	5875.000	46.89	21.49	68.37	-36.83	105.20	Peak
5	5925.000	40.42	21.65	62.07	-6.13	68.20	Peak
6	* 5991.030	43.62	21.86	65.48	-2.72	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ax-HE20 at Channel 5825 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

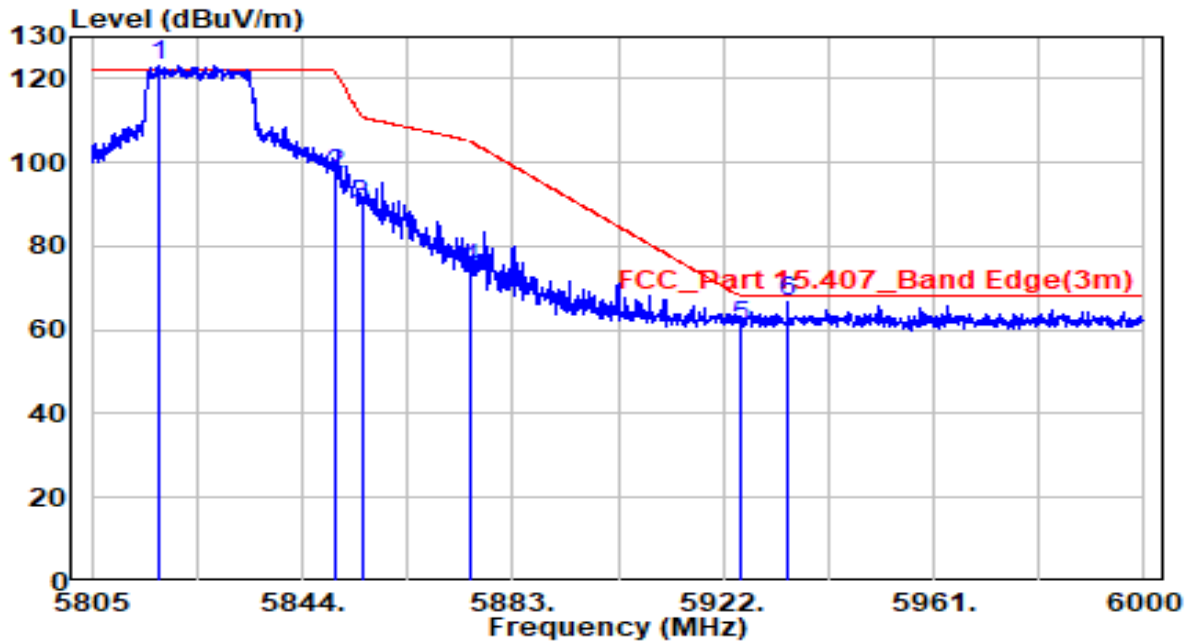


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5817.675	101.75	21.30	123.05	N/A	N/A	Peak
2		5850.000	75.56	21.40	96.97	-25.23	122.20	Peak
3		5855.000	68.19	21.42	89.61	-21.19	110.80	Peak
4		5875.000	53.20	21.49	74.69	-30.51	105.20	Peak
5		5925.000	39.37	21.65	61.02	-7.18	68.20	Peak
6		5933.895	44.84	21.68	66.51	-1.69	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ax-HE40 at Channel 5190 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

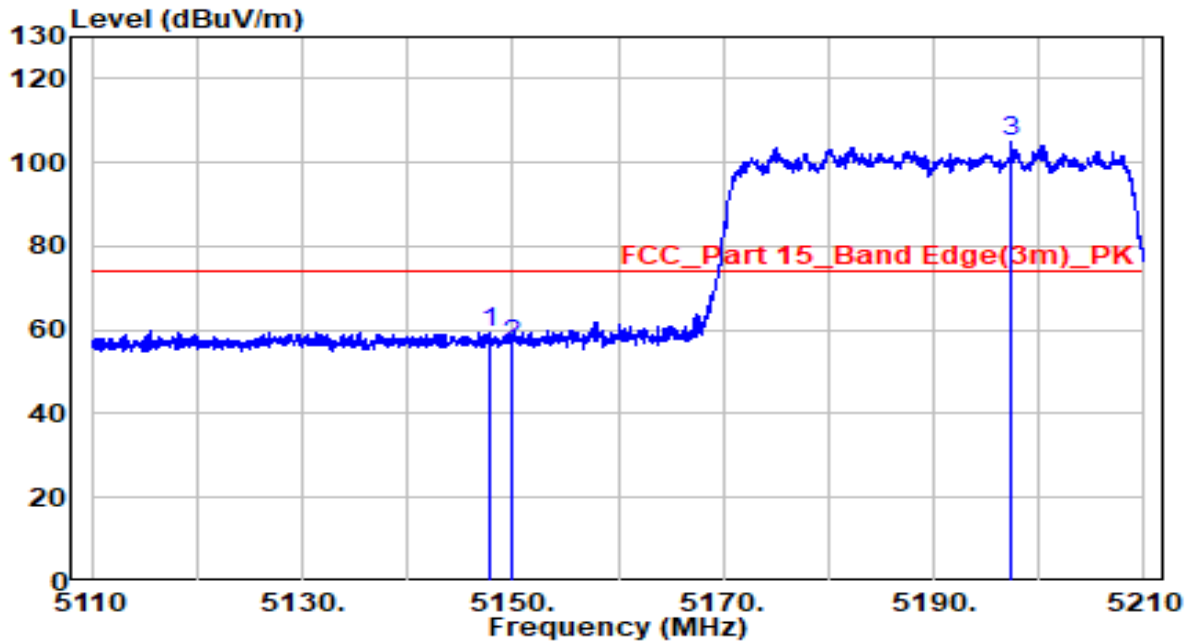


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5147.850	39.41	19.90	59.31	-14.69	74.00	Peak
2	5150.000	36.54	19.91	56.44	-17.56	74.00	Peak
3	* 5197.350	85.14	19.96	105.09	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ax-HE40 at Channel 5190 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

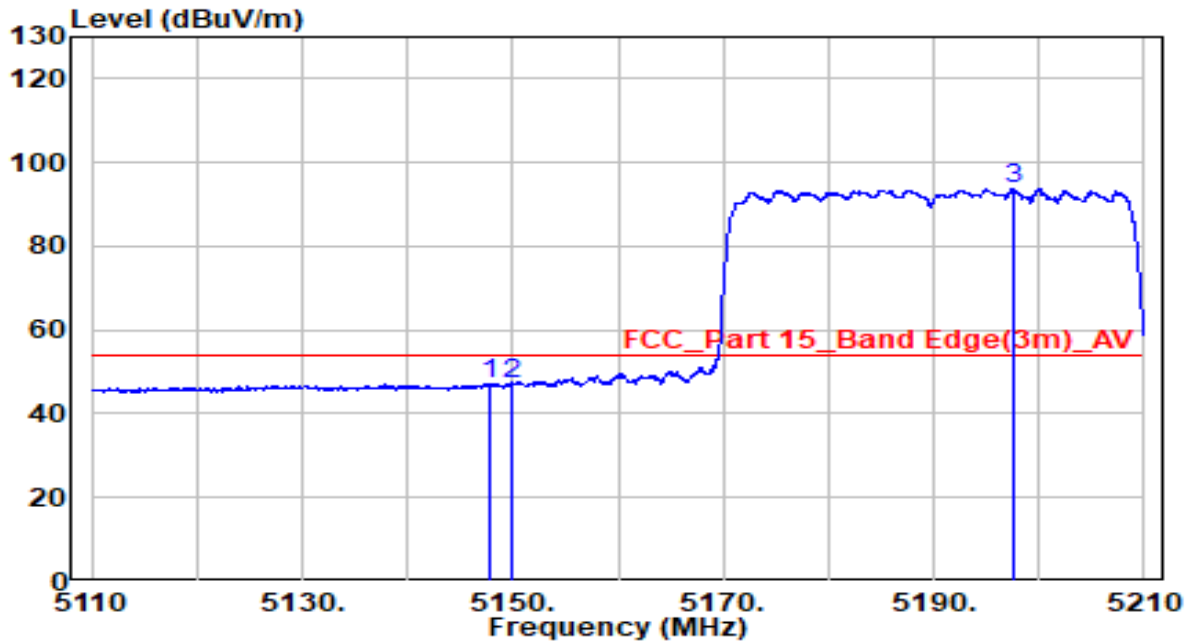


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5147.700	27.27	19.90	47.17	-6.83	54.00	Average
2	5150.000	27.39	19.91	47.30	-6.70	54.00	Average
3	* 5197.600	73.80	19.96	93.76	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ax-HE40 at Channel 5190 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

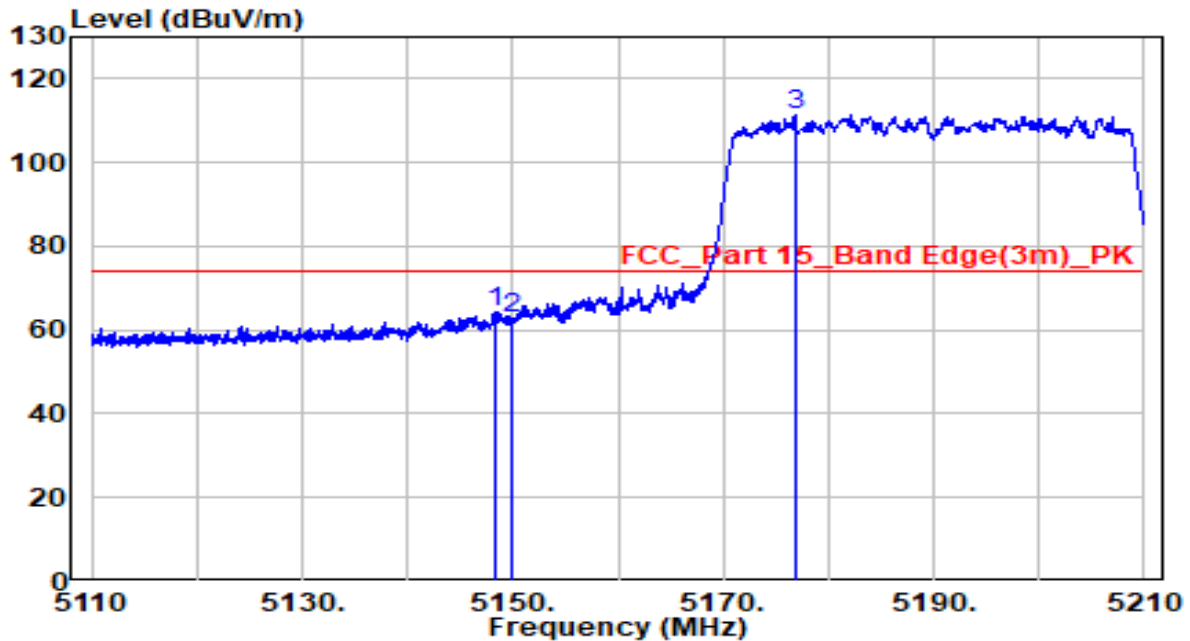


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.250	44.25	19.90	64.16	-9.84	74.00	Peak
2	5150.000	42.98	19.91	62.88	-11.12	74.00	Peak
3	* 5176.900	91.54	19.93	111.48	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ax-HE40 at Channel 5190 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

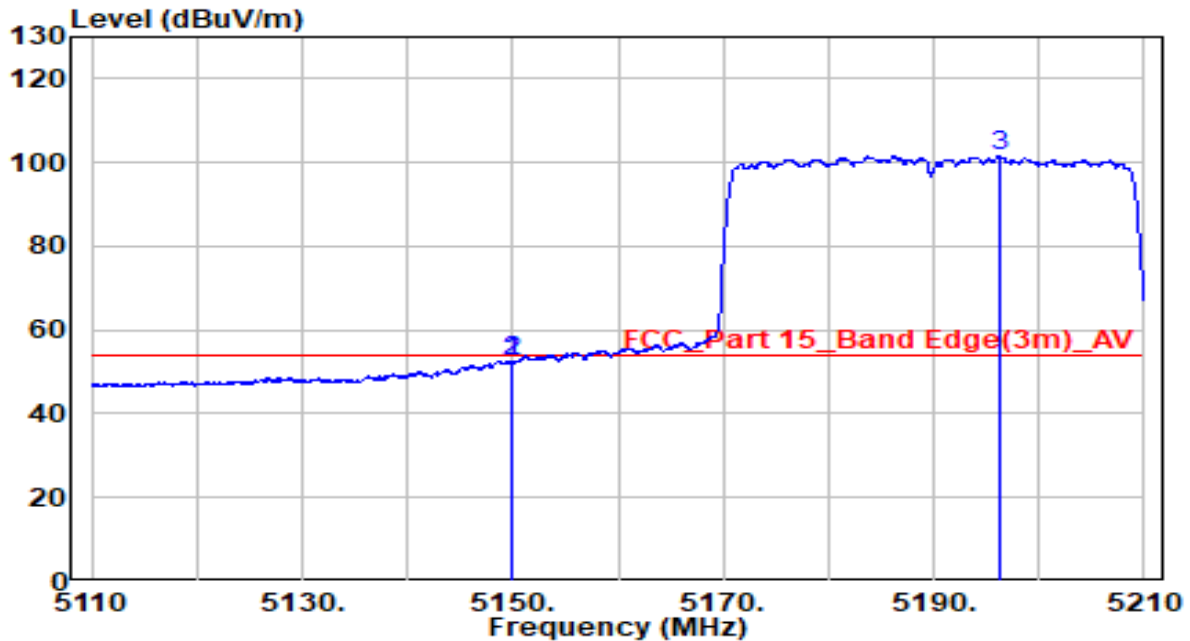


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.900	32.71	19.91	52.62	-1.38	54.00	Average
2	5150.000	32.52	19.91	52.43	-1.57	54.00	Average
3	* 5196.200	81.51	19.95	101.46	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ax-HE40 at Channel 5510 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

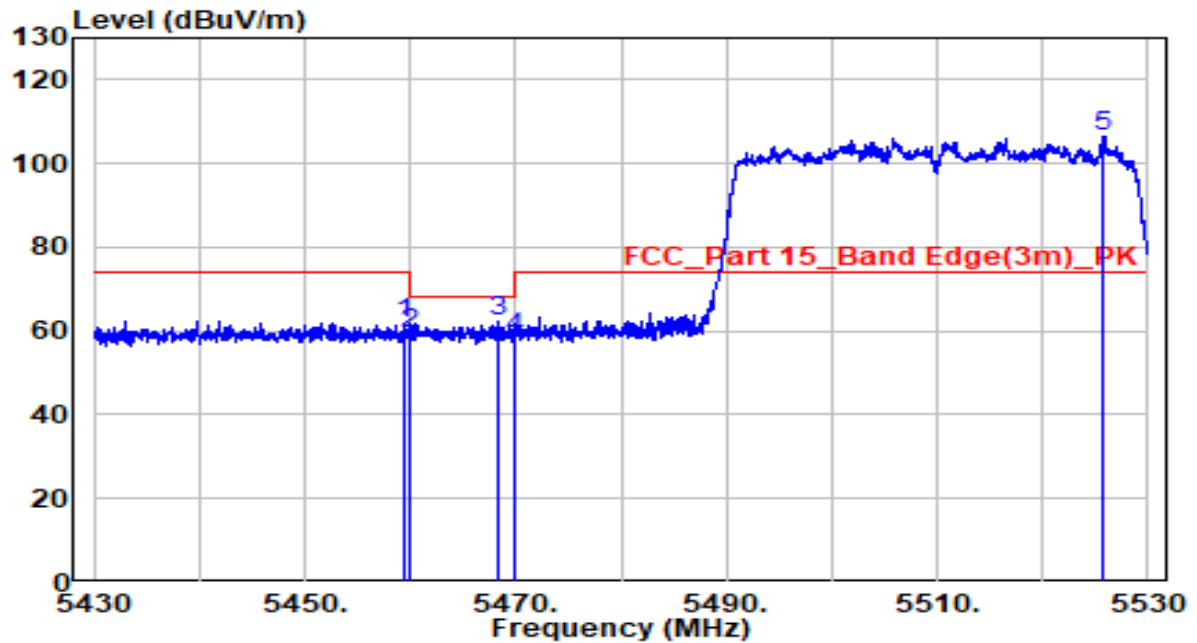


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5459.500	41.45	20.23	61.68	-12.32	74.00	Peak
2	5460.000	38.94	20.23	59.17	-9.03	68.20	Peak
3	5468.250	42.25	20.24	62.49	-5.71	68.20	Peak
4	5470.000	38.19	20.24	58.42	-9.78	68.20	Peak
5	5525.700	86.20	20.35	106.55	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ax-HE40 at Channel 5510 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

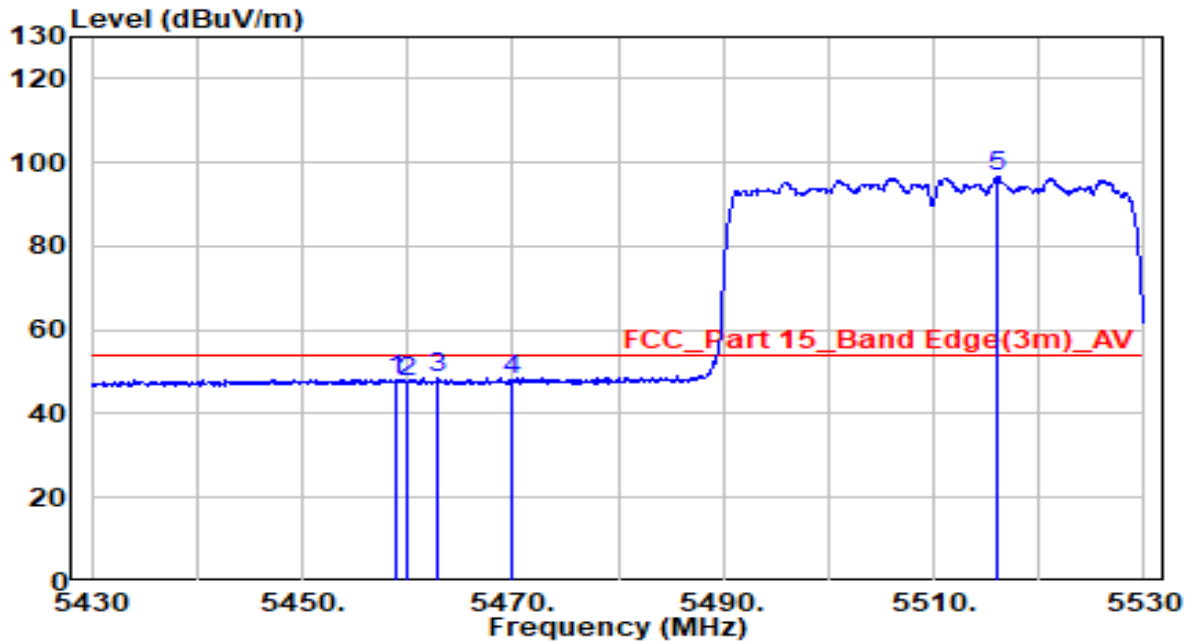


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5459.000	27.97	20.23	48.20	-5.80	54.00	Average
2	5460.000	27.41	20.23	47.63	-6.37	54.00	Average
3	5462.950	28.51	20.23	48.75	-5.25	54.00	Average
4	5470.000	27.65	20.24	47.89	-6.11	54.00	Average
5	* 5516.100	76.24	20.32	96.56	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ax-HE40 at Channel 5510 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

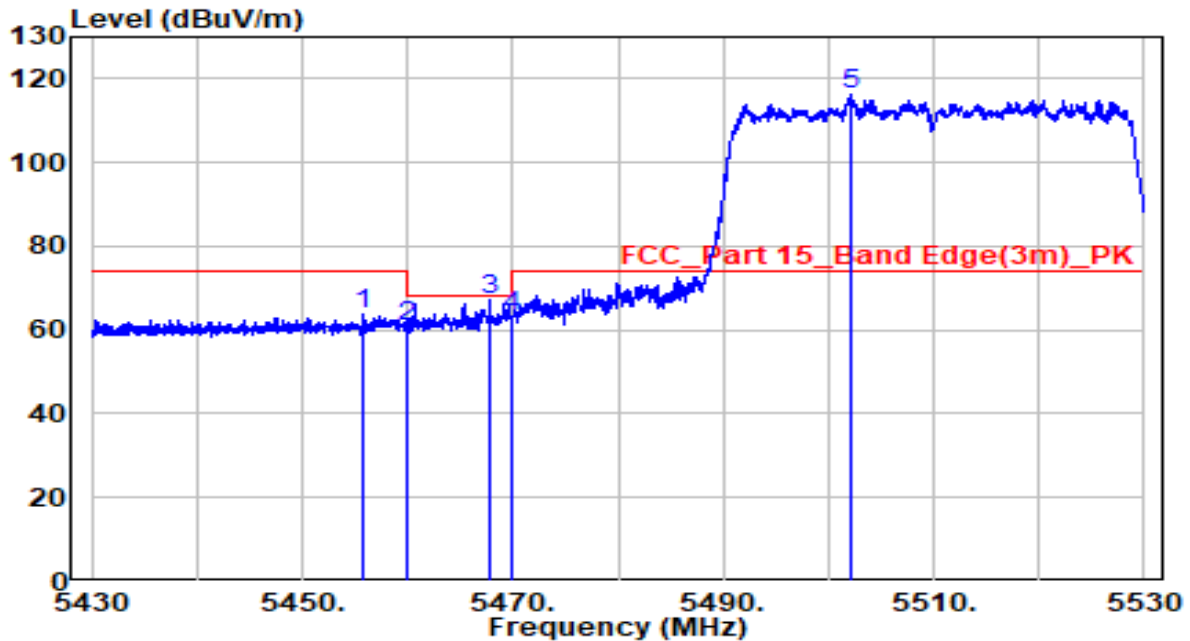


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5455.850	43.43	20.22	63.65	-10.35	74.00	Peak
2	5460.000	40.57	20.23	60.80	-7.40	68.20	Peak
3	5467.750	46.83	20.24	67.06	-1.14	68.20	Peak
4	5470.000	42.94	20.24	63.18	-5.02	68.20	Peak
5	* 5502.050	95.98	20.28	116.25	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ax-HE40 at Channel 5510 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

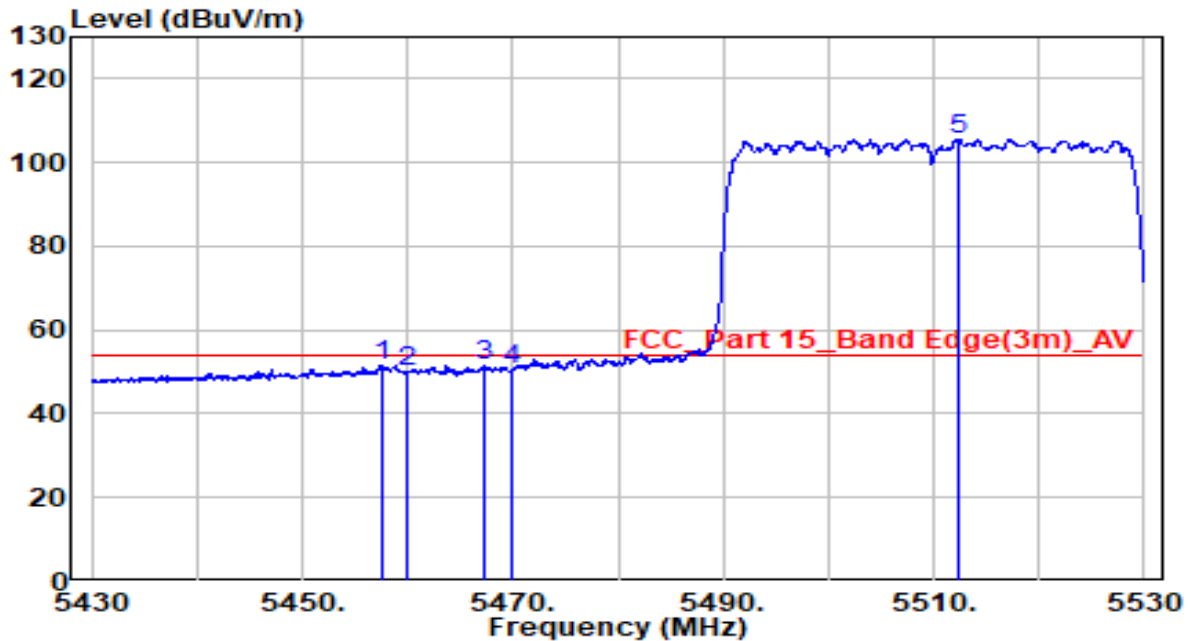


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5457.500	31.28	20.23	51.51	-2.49	54.00	Average
2	5460.000	29.65	20.23	49.88	-4.12	54.00	Average
3	5467.200	31.22	20.24	51.46	-2.54	54.00	Average
4	5470.000	30.45	20.24	50.69	-3.31	54.00	Average
5	* 5512.250	85.39	20.31	105.70	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ax-HE40 at Channel 5670 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

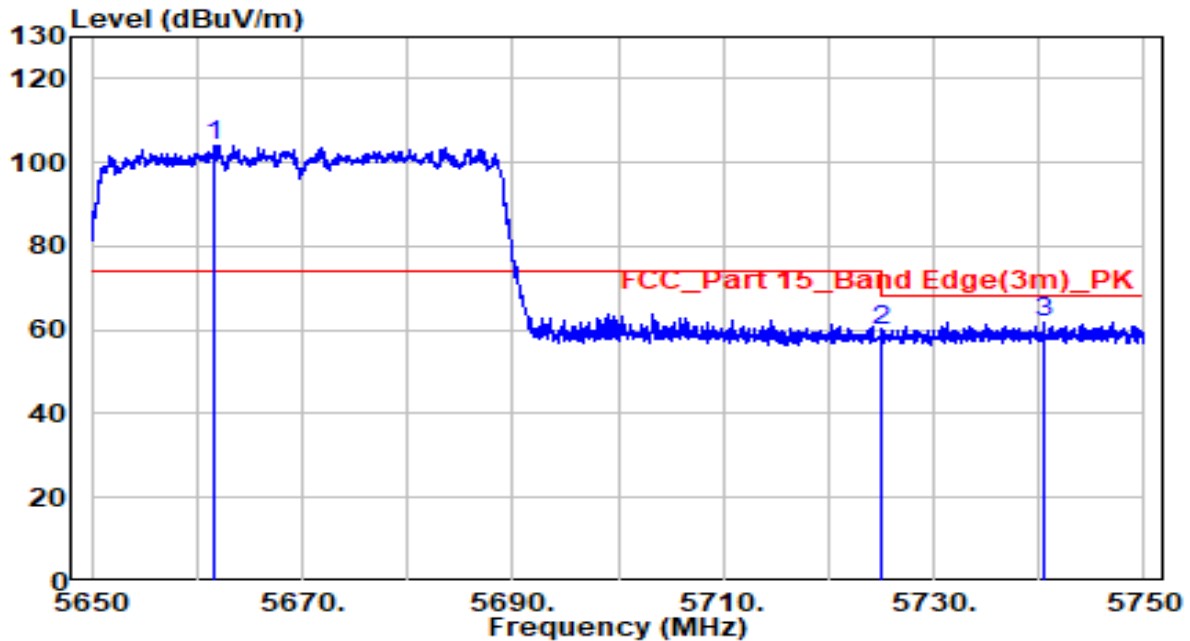


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5661.650	83.45	20.79	104.24	N/A	N/A	Peak
2		5725.000	38.68	21.00	59.68	-8.52	68.20	Peak
3		5740.450	40.91	21.05	61.96	-6.24	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ax-HE40 at Channel 5670 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

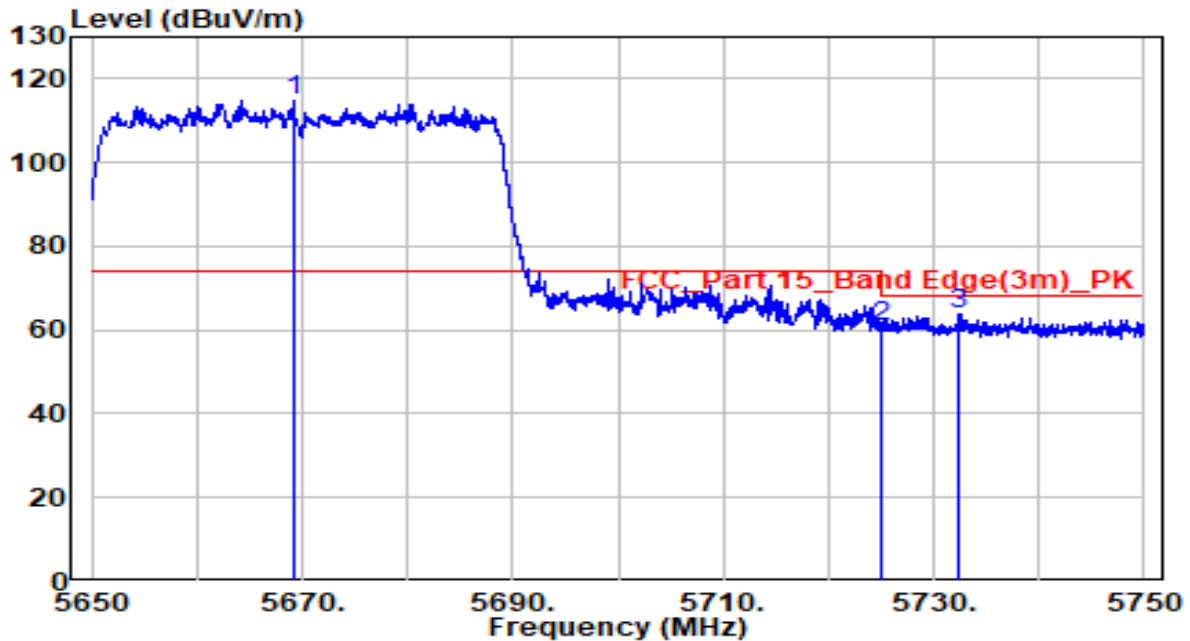


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5669.250	93.94	20.82	114.76	N/A	N/A	Peak
2		5725.000	39.83	21.00	60.83	-7.37	68.20	Peak
3		5732.350	42.83	21.02	63.85	-4.35	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ax-HE40 at Channel 5755 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

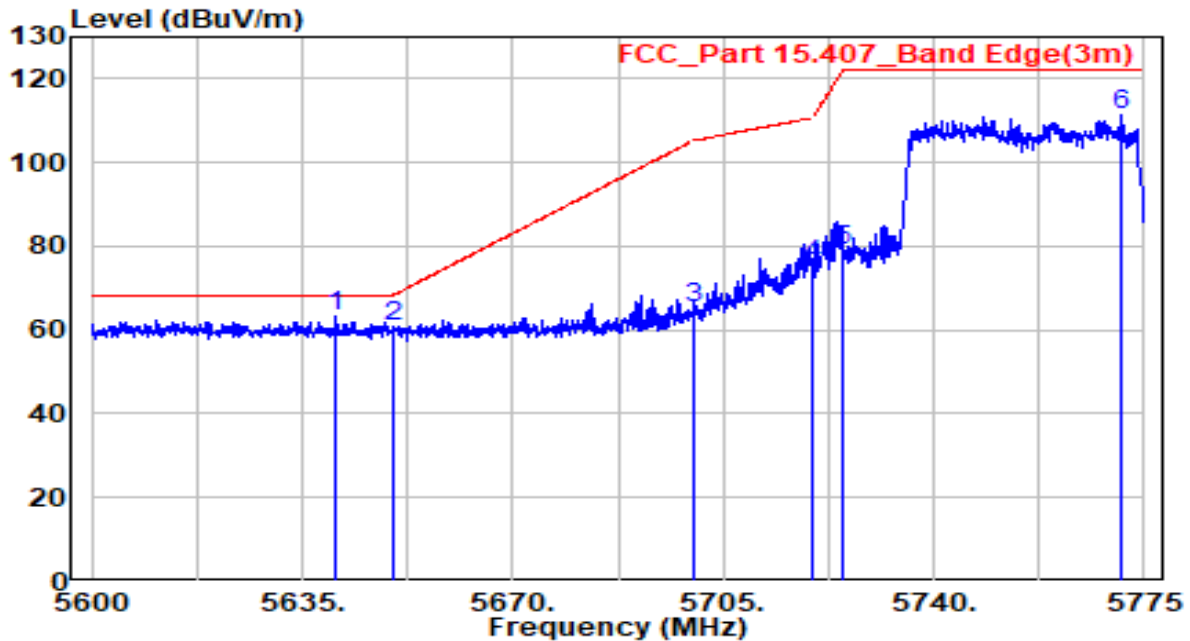


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5640.600	42.50	20.73	63.23	-4.97	68.20	Peak
2		5650.000	39.85	20.76	60.61	-7.59	68.20	Peak
3		5700.000	44.47	20.92	65.38	-39.82	105.20	Peak
4		5720.000	54.38	20.98	75.36	-35.44	110.80	Peak
5		5725.000	57.77	21.00	78.77	-43.43	122.20	Peak
6		5771.150	90.13	21.15	111.28	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ax-HE40 at Channel 5755 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

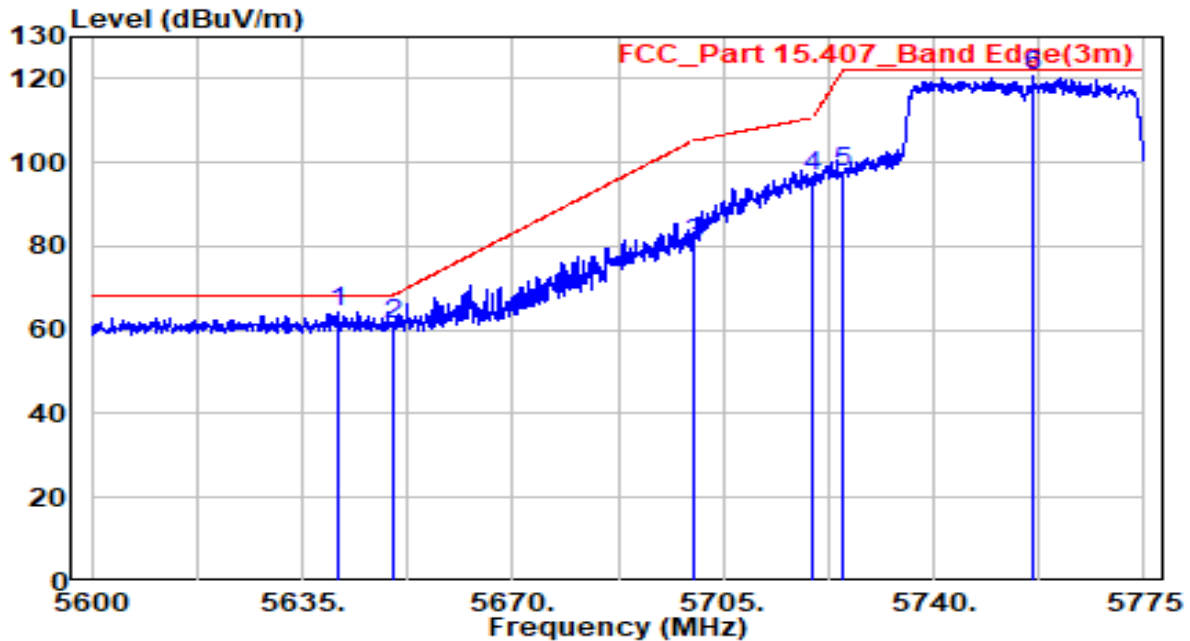


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5640.775	43.67	20.73	64.39	-3.81	68.20	Peak
2	5650.000	40.43	20.76	61.19	-7.01	68.20	Peak
3	5700.000	59.51	20.92	80.43	-24.77	105.20	Peak
4	5720.000	75.89	20.98	96.88	-13.92	110.80	Peak
5	5725.000	76.54	21.00	97.54	-24.66	122.20	Peak
6	* 5756.538	99.36	21.10	120.46	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ax-HE40 at Channel 5795 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

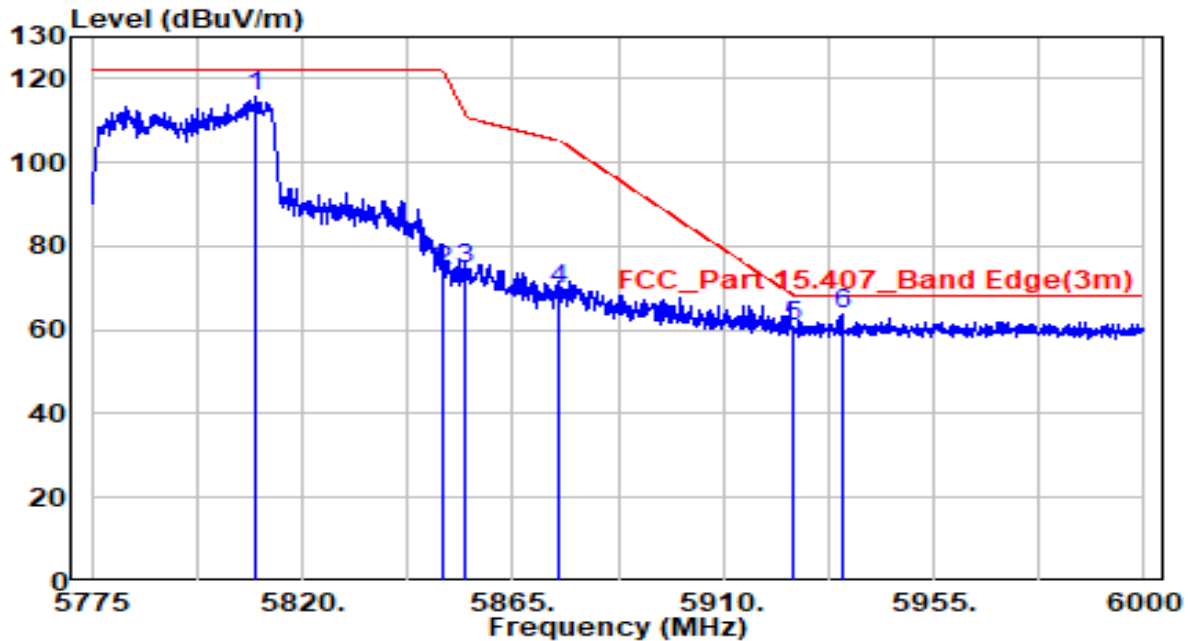


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5809.875	94.31	21.27	115.59	N/A	N/A	Peak
2	5850.000	52.54	21.40	73.94	-48.26	122.20	Peak
3	5855.000	53.28	21.42	74.70	-36.10	110.80	Peak
4	5875.000	48.04	21.49	69.52	-35.68	105.20	Peak
5	5925.000	39.09	21.65	60.74	-7.46	68.20	Peak
6	* 5935.313	42.09	21.68	63.77	-4.43	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ax-HE40 at Channel 5795 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

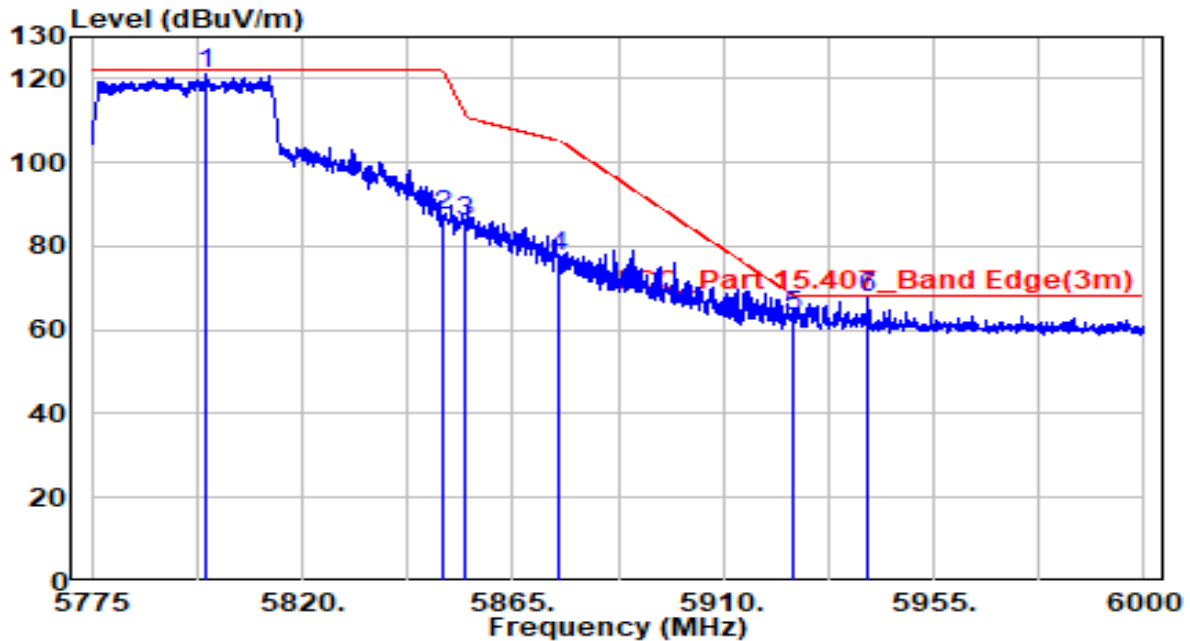


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5799.525	100.11	21.24	121.35	N/A	N/A	Peak
2	5850.000	65.86	21.40	87.26	-34.94	122.20	Peak
3	5855.000	64.65	21.42	86.07	-24.73	110.80	Peak
4	5875.000	56.21	21.49	77.69	-27.51	105.20	Peak
5	5925.000	41.55	21.65	63.20	-5.00	68.20	Peak
6	* 5940.712	46.17	21.70	67.87	-0.33	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5210MHz(Beamforming Mode)	Test Voltage	120V/60Hz

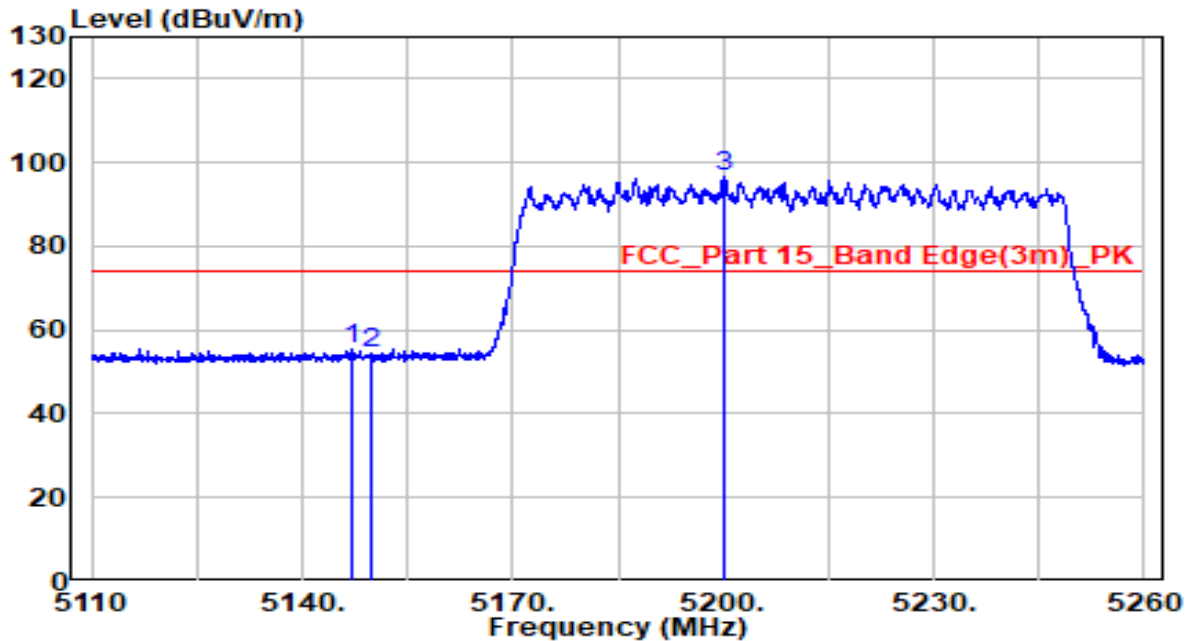


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5147.275	35.59	19.90	55.49	-18.51	74.00	Peak
2	5150.000	34.45	19.91	54.36	-19.64	74.00	Peak
3	* 5200.150	76.88	19.96	96.84	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5210MHz(Beamforming Mode)	Test Voltage	120V/60Hz

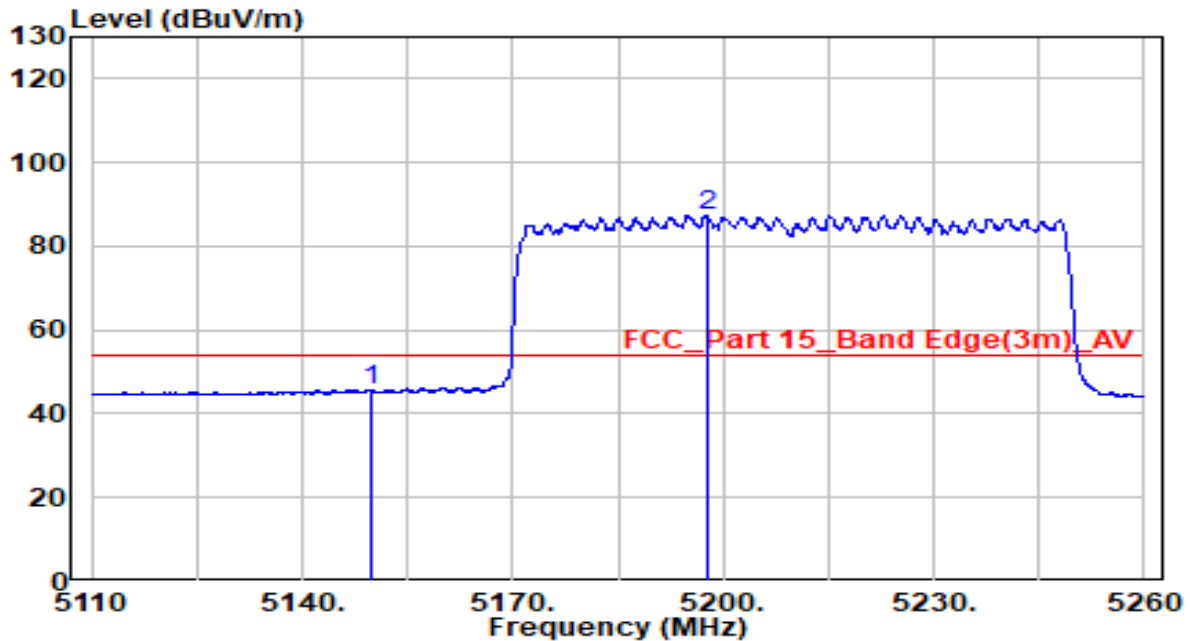


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	25.53	19.91	45.43	-8.57	54.00	Average
2	* 5197.600	67.36	19.96	87.31	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5210MHz(Beamforming Mode)	Test Voltage	120V/60Hz

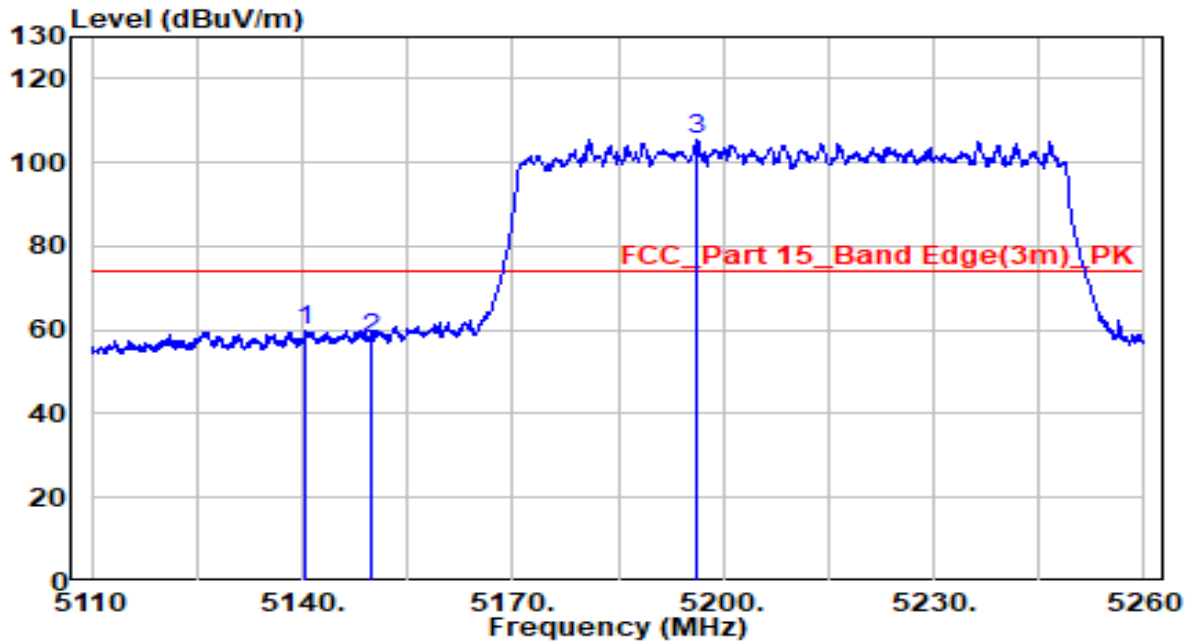


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5140.450	39.75	19.90	59.65	-14.35	74.00	Peak
2	5150.000	37.93	19.91	57.84	-16.16	74.00	Peak
3	* 5196.250	85.58	19.95	105.54	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE80 at channel 5210MHz(Beamforming Mode)	Test Voltage	120V/60Hz

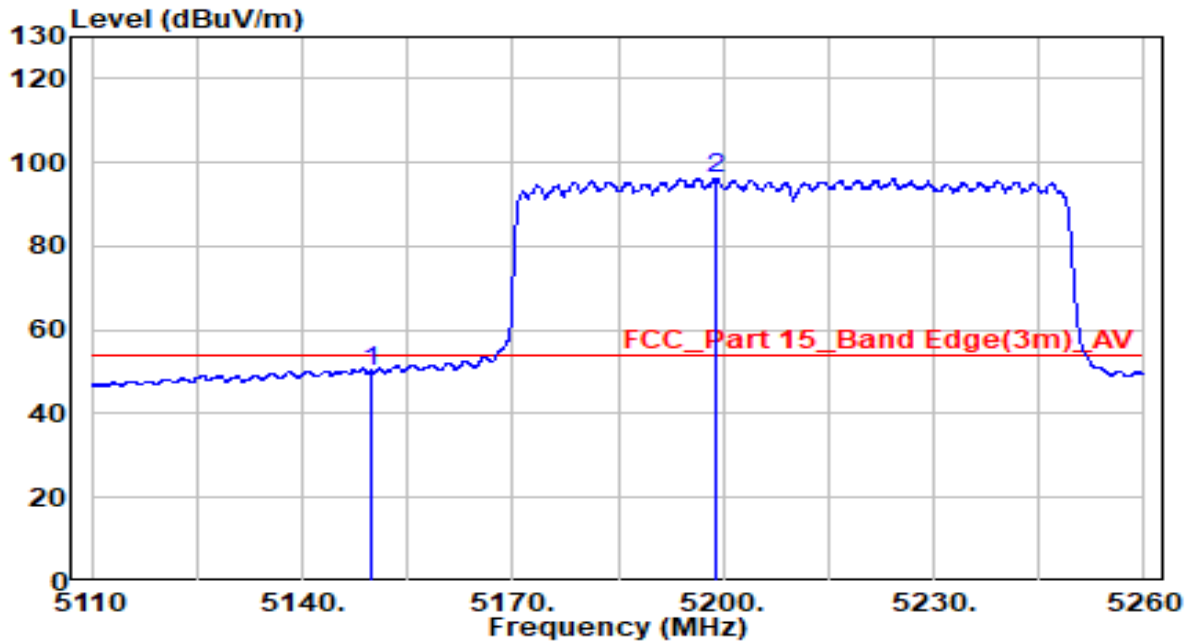


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	30.31	19.91	50.22	-3.78	54.00	Average
2	* 5199.100	76.19	19.96	96.15	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ax-HE80 at Channel 5530 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

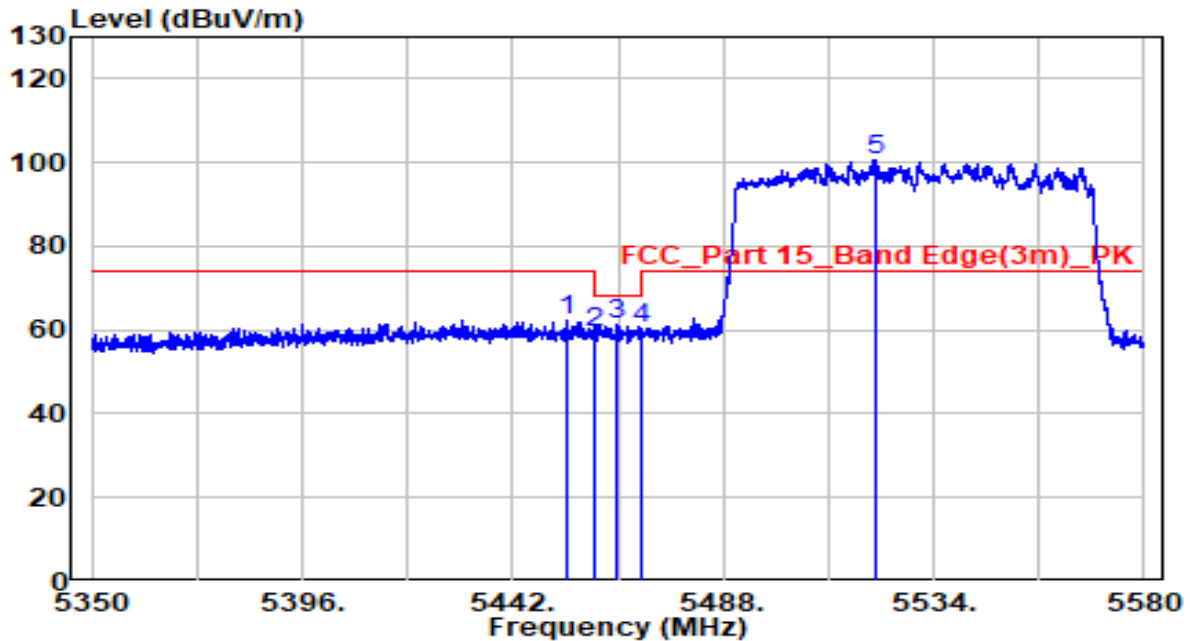


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5454.075	42.03	20.22	62.26	-11.74	74.00	Peak
2	5460.000	39.17	20.23	59.39	-8.81	68.20	Peak
3	5464.885	41.24	20.23	61.47	-6.73	68.20	Peak
4	5470.000	40.29	20.24	60.53	-7.67	68.20	Peak
5	* 5521.120	80.46	20.34	100.80	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ax-HE80 at Channel 5530 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

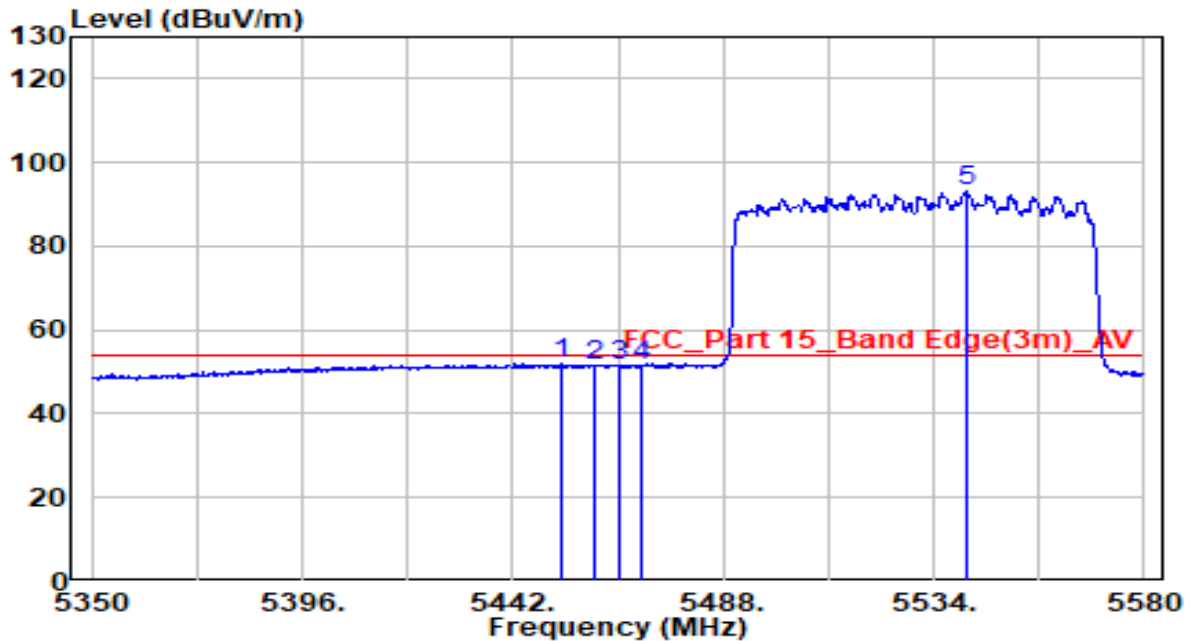


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5452.810	31.57	20.22	51.79	-2.21	54.00	Average
2	5460.000	31.10	20.23	51.33	-2.67	54.00	Average
3	5465.345	31.51	20.23	51.74	-2.26	54.00	Average
4	5470.000	31.27	20.24	51.51	-2.49	54.00	Average
5	* 5541.015	72.59	20.40	93.00	N/A	N/A	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ax-HE80 at Channel 5530 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

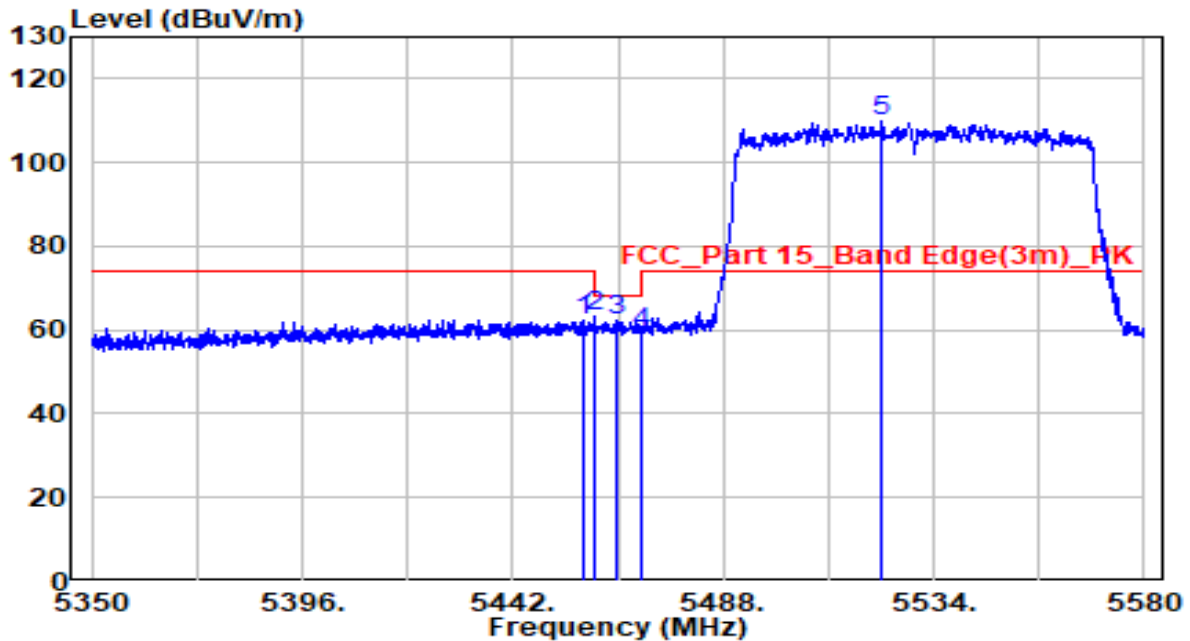


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5457.525	42.07	20.23	62.30	-11.70	74.00	Peak
2	5460.000	42.82	20.23	63.05	-5.15	68.20	Peak
3	5464.655	42.06	20.23	62.29	-5.91	68.20	Peak
4	5470.000	39.29	20.24	59.53	-8.67	68.20	Peak
5	* 5522.615	89.40	20.34	109.74	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ax-HE80 at Channel 5530 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

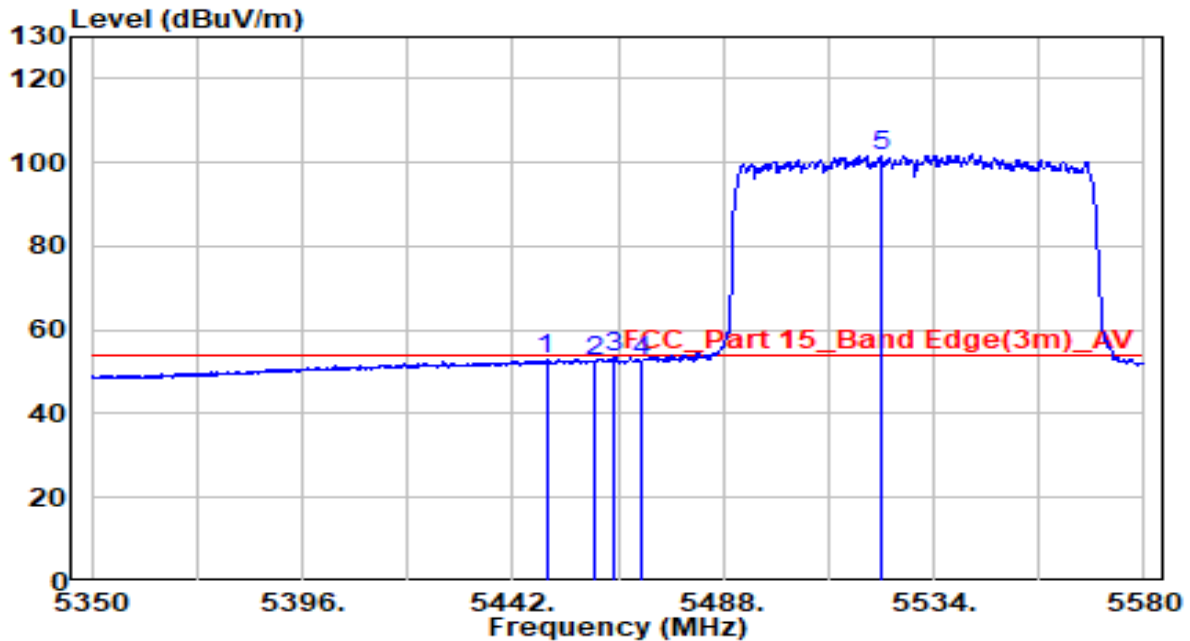


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5449.360	32.76	20.22	52.98	-1.02	54.00	Average
2	5460.000	32.31	20.23	52.54	-1.46	54.00	Average
3	* 5464.310	33.08	20.23	53.32	-0.68	54.00	Average
4	5470.000	32.03	20.24	52.27	-1.73	54.00	Average
5	* 5522.385	81.12	20.34	101.46	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ax-HE80 at Channel 5610 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

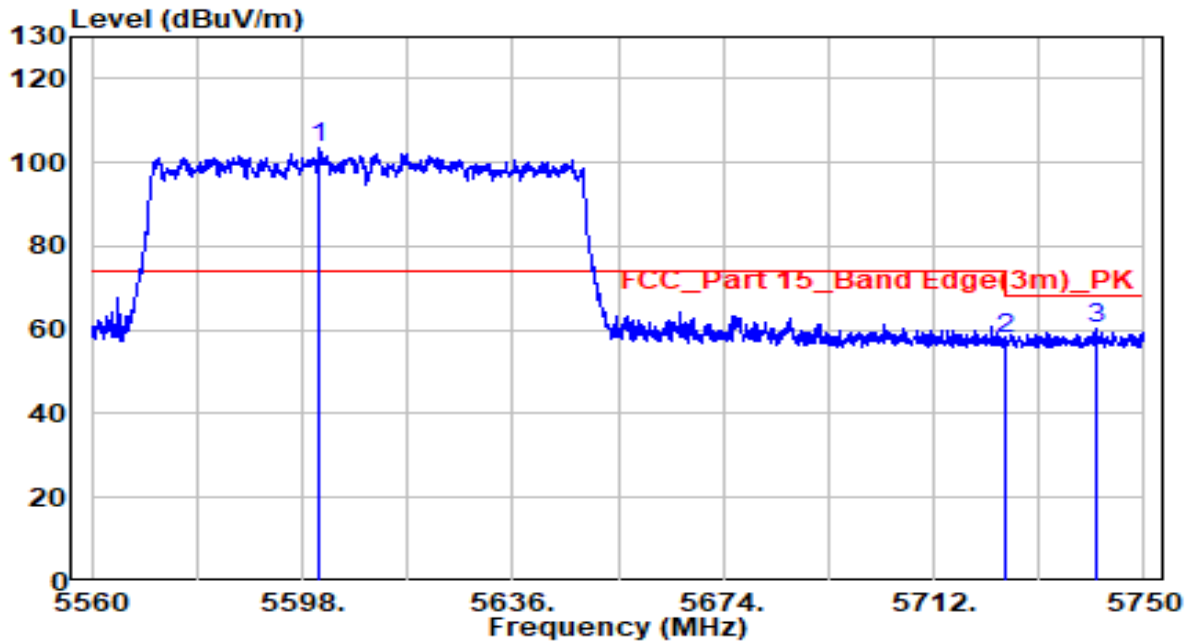


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5601.040	82.80	20.60	103.40	N/A	N/A	Peak
2		5725.000	36.92	21.00	57.91	-10.29	68.20	Peak
3		5741.165	39.24	21.05	60.29	-7.91	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ax-HE80 at Channel 5610 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

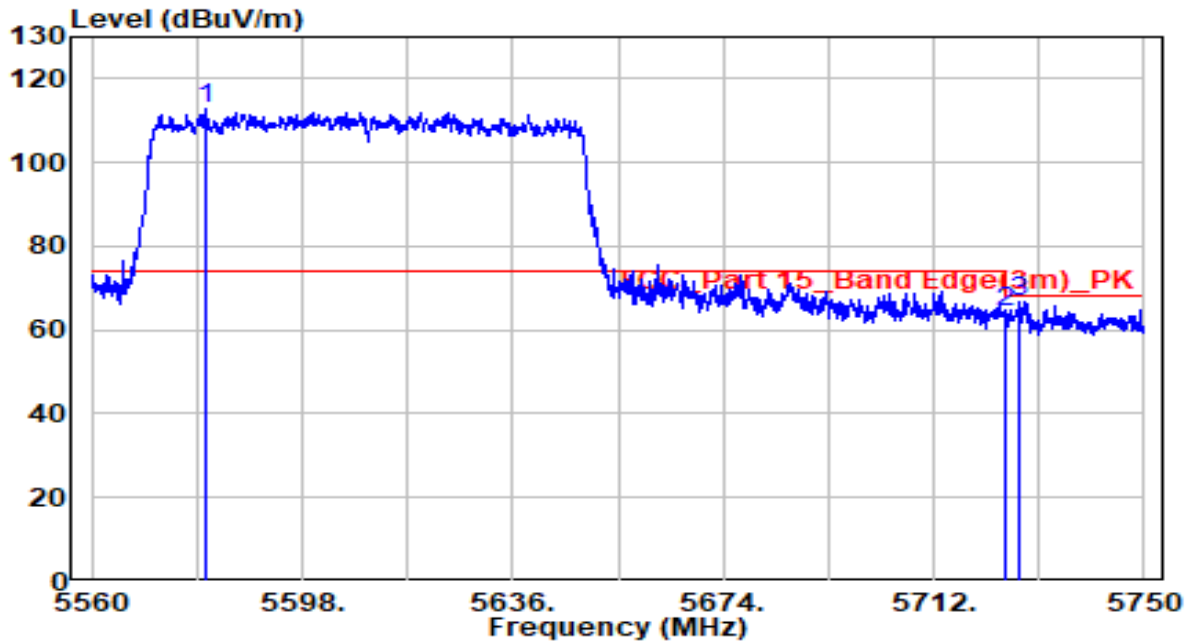


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	5580.805	88.82	23.93	112.75	N/A	N/A	Peak
2		5725.000	39.97	24.11	64.08	-4.12	68.20	Peak
3		5727.485	42.57	24.13	66.70	-1.50	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ax-HE80 at Channel 5775 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

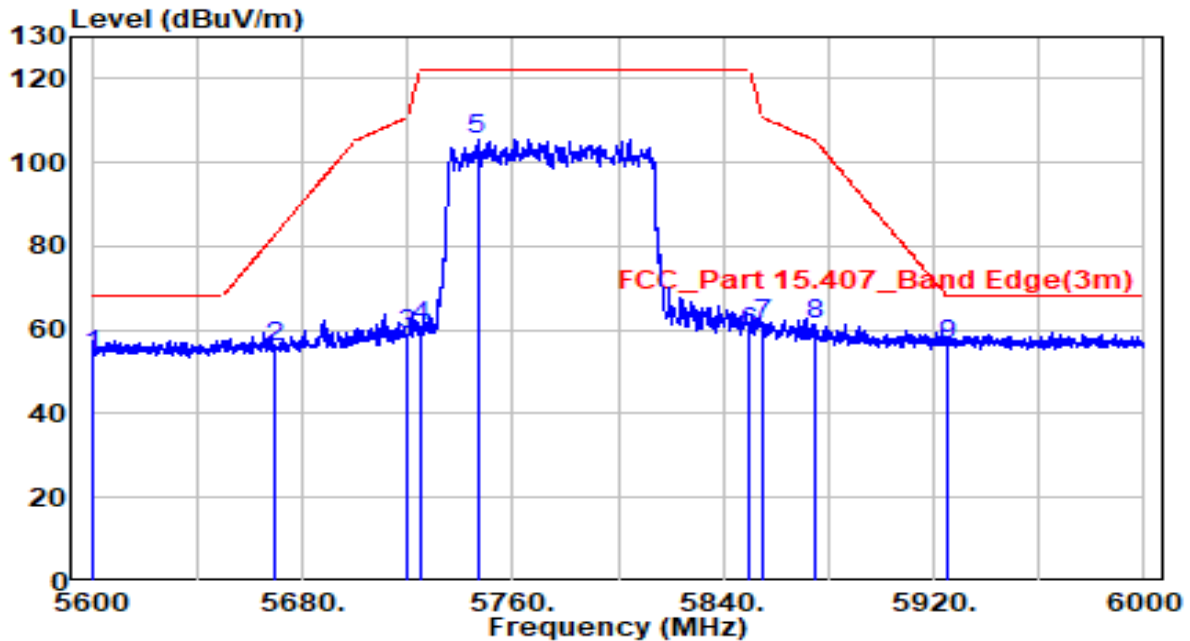


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5600.000	33.29	20.59	53.88	-14.32	68.20	Peak
2	5670.000	35.23	20.82	56.05	-26.99	83.04	Peak
3	5720.000	37.68	20.98	58.66	-52.14	110.80	Peak
4	5725.000	39.70	21.00	60.70	-61.50	122.20	Peak
5	5746.600	84.55	21.07	105.62	N/A	N/A	Peak
6	5850.000	37.75	21.40	59.15	-63.05	122.20	Peak
7	5855.000	39.85	21.42	61.27	-49.53	110.80	Peak
8	5875.000	39.64	21.49	61.12	-44.08	105.20	Peak
9	* 5925.000	34.91	21.65	56.55	-11.65	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11 ax-HE80 at Channel 5775 MHz(Beamforming Mode)	Test Voltage	120V/60Hz

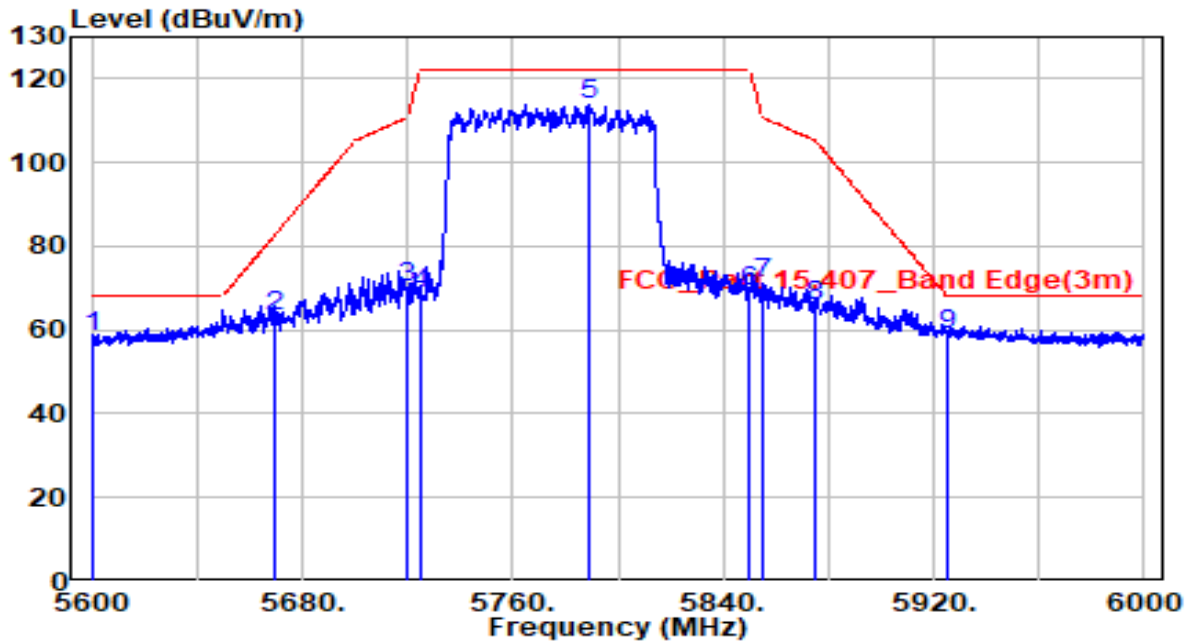


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5600.000	37.54	20.59	58.13	-10.07	68.20	Peak
2	5670.000	42.43	20.82	63.26	-19.78	83.04	Peak
3	5720.000	49.36	20.98	70.35	-40.45	110.80	Peak
4	5725.000	47.88	21.00	68.87	-53.33	122.20	Peak
5	* 5789.400	92.65	21.21	113.86	N/A	N/A	Peak
6	5850.000	47.97	21.40	69.38	-52.82	122.20	Peak
7	5855.000	49.48	21.42	70.90	-39.90	110.80	Peak
8	5875.000	44.38	21.49	65.86	-39.34	105.20	Peak
9	* 5925.000	37.15	21.65	58.80	-9.40	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE160 at channel 5570MHz(Beamforming Mode)	Test Voltage	120V/60Hz

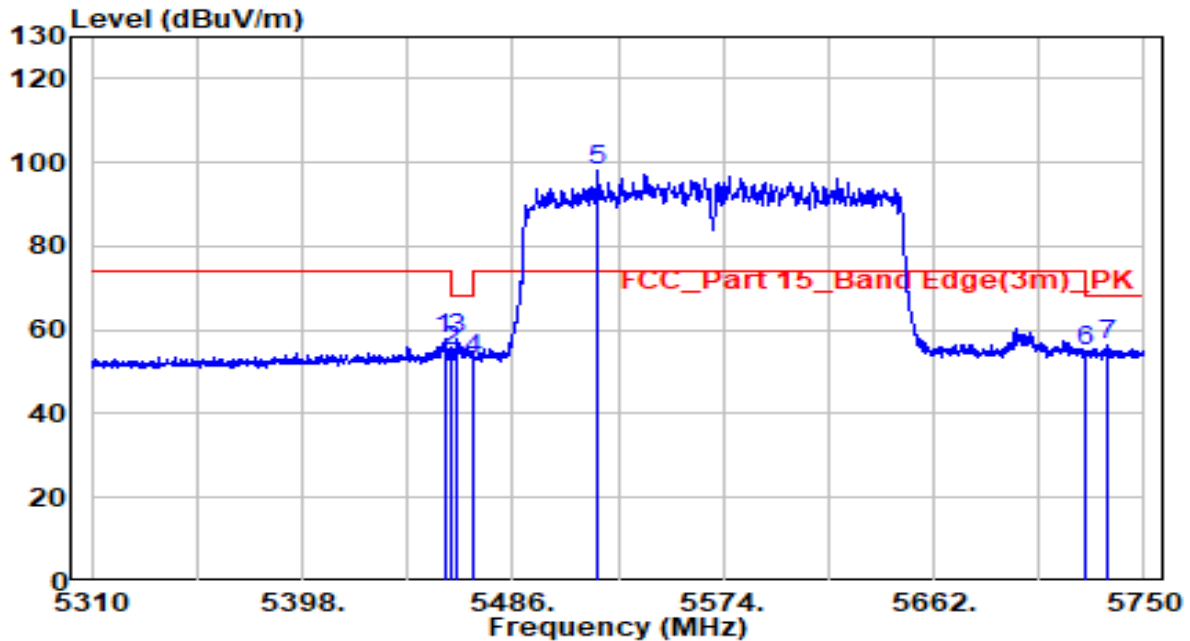


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5457.400	37.81	20.23	58.04	-15.96	74.00	Peak
2	5460.000	34.77	20.23	55.00	-13.20	68.20	Peak
3	5462.680	37.68	20.23	57.91	-10.29	68.20	Peak
4	5470.000	32.81	20.24	53.05	-15.15	68.20	Peak
5	* 5521.420	78.01	20.34	98.35	N/A	N/A	Peak
6	5725.000	33.89	21.00	54.88	-13.32	68.20	Peak
7	5734.380	35.30	21.03	56.33	-11.87	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE160 at channel 5570MHz(Beamforming Mode)	Test Voltage	120V/60Hz

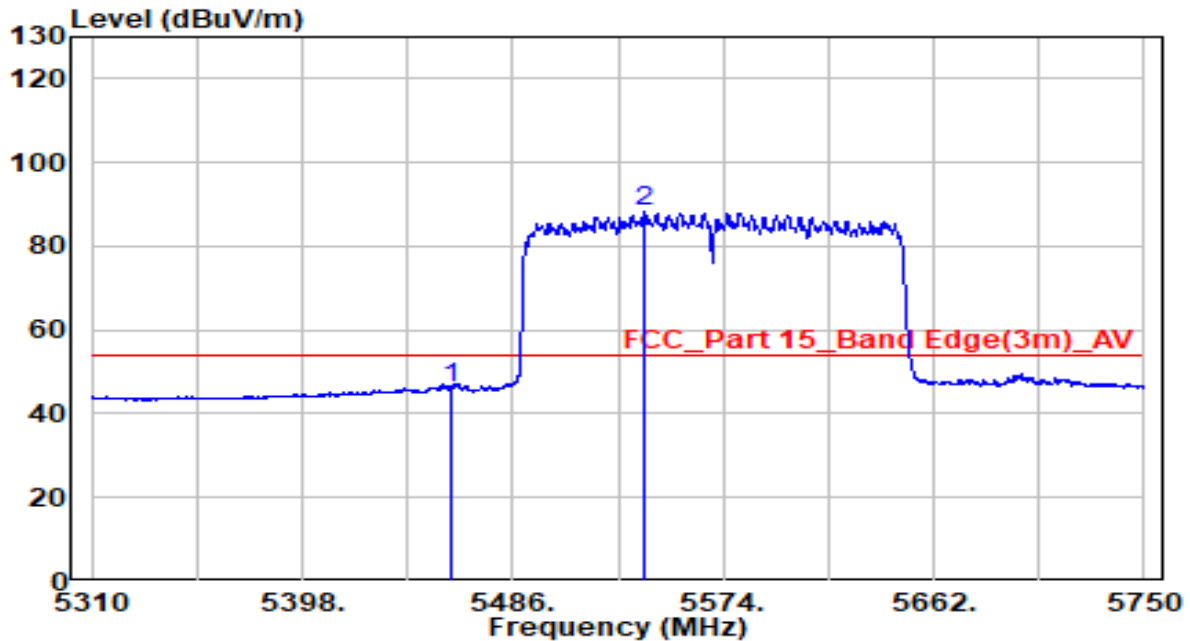


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	25.67	20.23	45.90	-8.10	54.00	Average
2	* 5541.000	67.88	20.40	88.29	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE160 at channel 5570MHz(Beamforming Mode)	Test Voltage	120V/60Hz

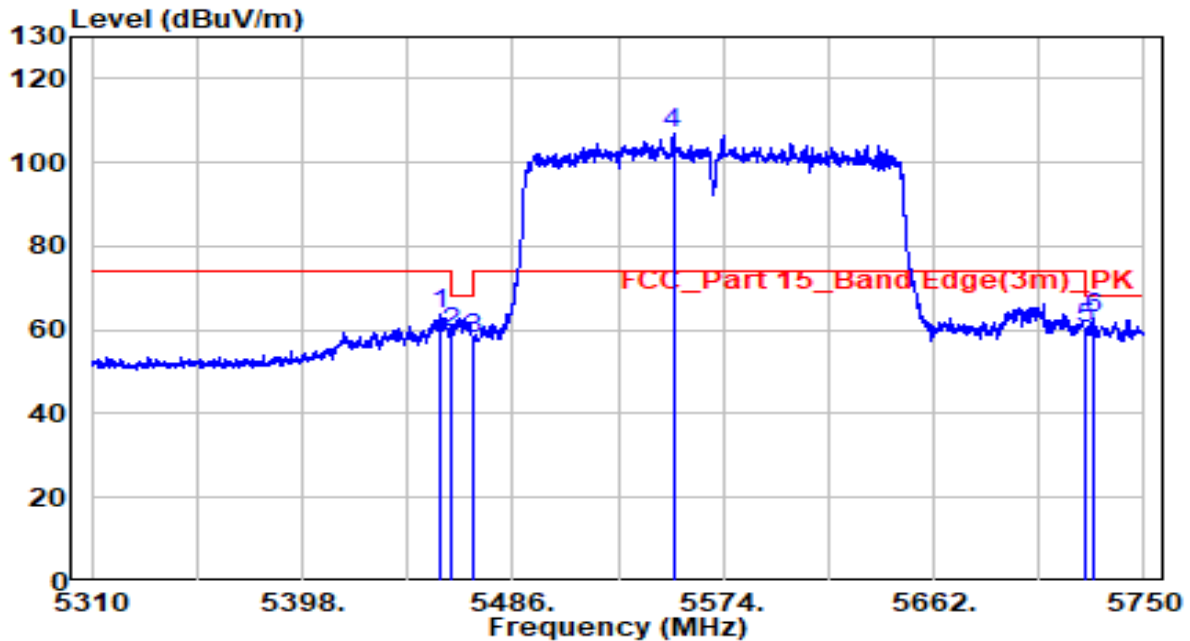


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5456.080	43.34	20.22	63.57	-10.43	74.00	Peak
2	5460.000	39.27	20.23	59.50	-8.70	68.20	Peak
3	5470.000	37.54	20.24	57.78	-10.42	68.20	Peak
4 *	5553.100	86.31	20.44	106.75	N/A	N/A	Peak
5	5725.000	39.33	21.00	60.33	-7.87	68.20	Peak
6	5728.660	41.55	21.01	62.56	-5.64	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	BBHA 9120D_1-18GHz_2020	Temp. / Humidity	23.5°C/41.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Kevin ker
Test Mode	Transmit by 802.11ax-HE160 at channel 5570MHz(Beamforming Mode)	Test Voltage	120V/60Hz

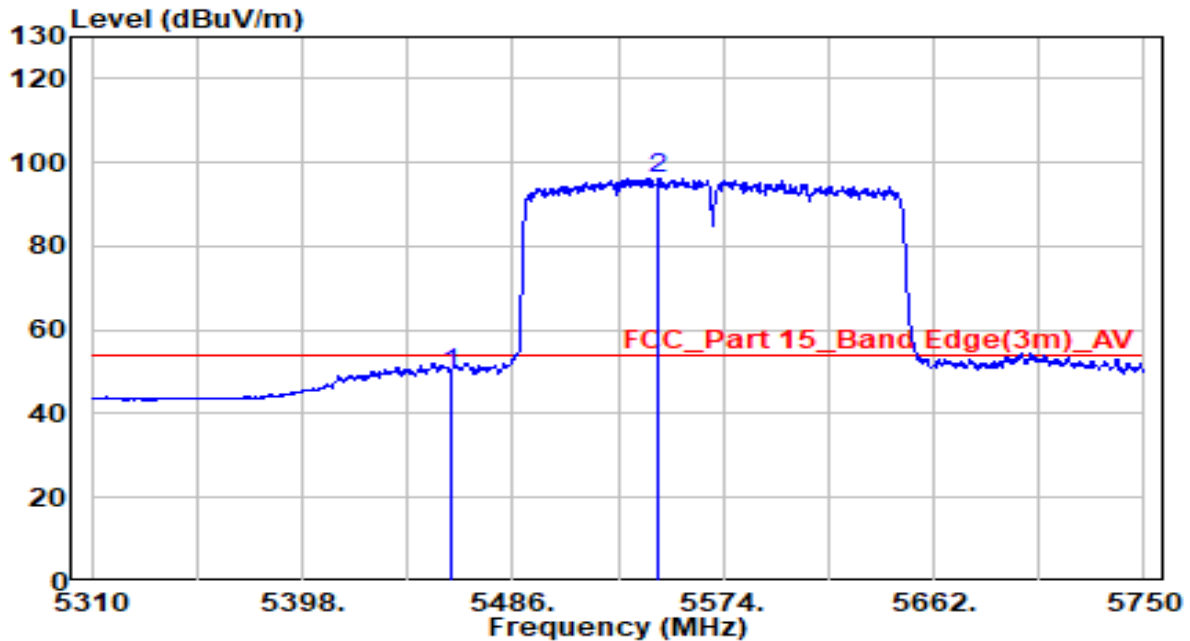

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	29.42	20.23	49.65	-4.35	54.00	Average
2	* 5547.160	75.97	20.42	96.39	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

7.10. AC Conducted Emissions Measurement

7.10.1.TestLimit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.


7.10.2.Test Procedure

The EUT was setup according to ANSI C63.4, 2009 and tested according to KDB 789033 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.


Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

7.10.3.Test Setup

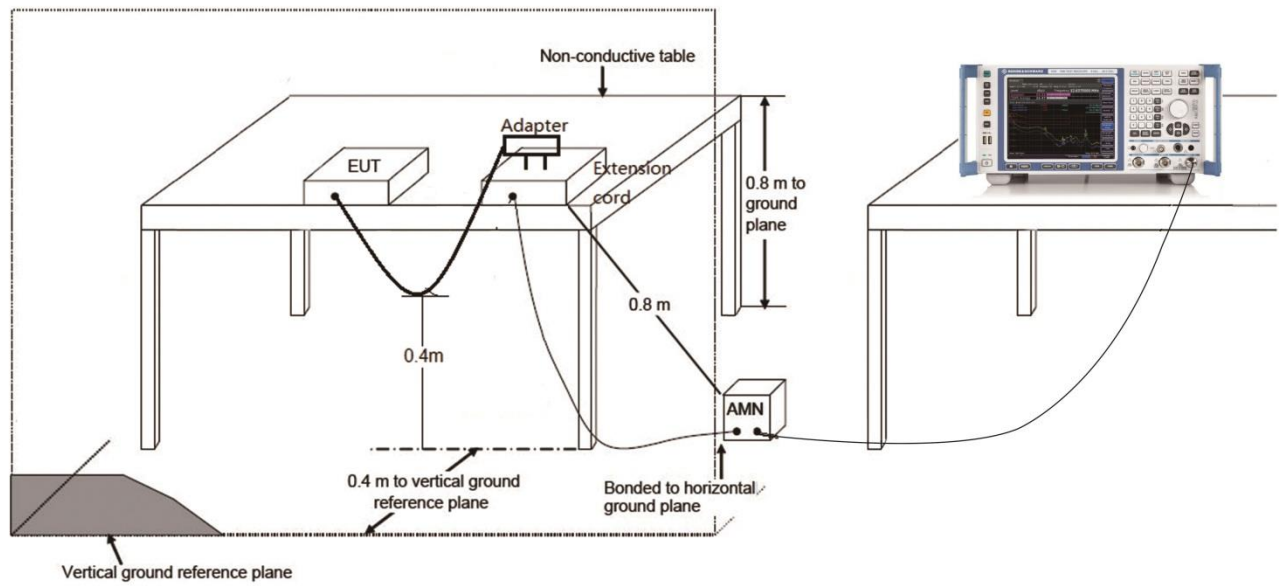

7.10.4.Test Result

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	CE_ENV216-L1 (Filter ON)_2020	Temp. / Humidity	25.2°C /47.6%
Polarity	Line1	Site / Test Engineer	SR2 / Peter Xu
Test Mode	1	Test Voltage	120V/60Hz

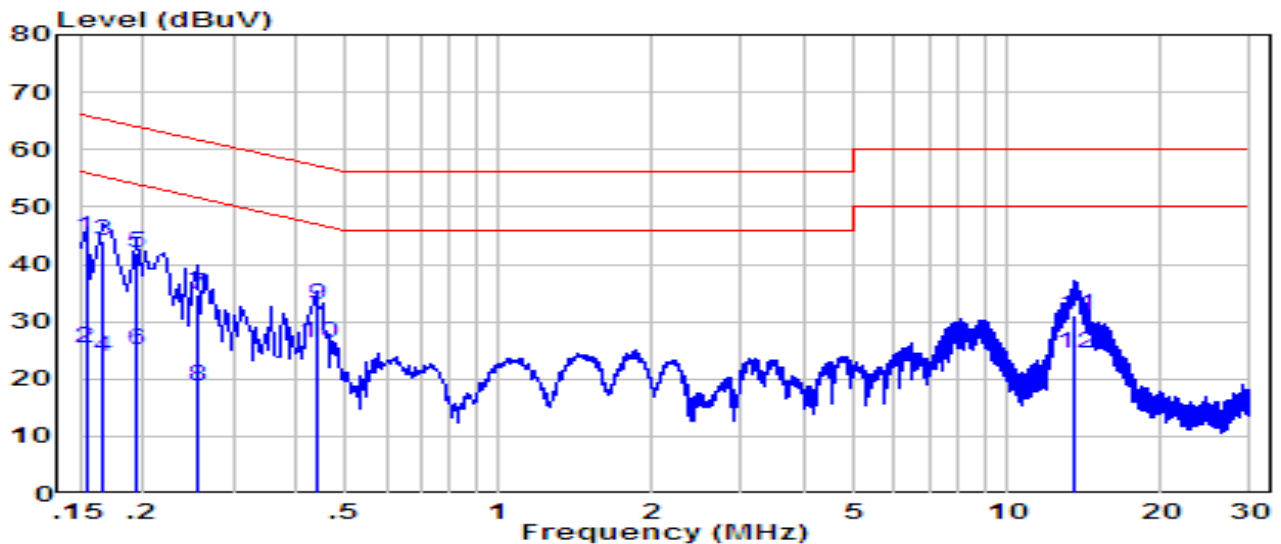


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	0.154	34.96	9.60	44.56	-21.22	65.78	QP
2	0.154	15.86	9.60	25.46	-30.32	55.78	Average
3	0.166	34.39	9.58	43.97	-21.19	65.16	QP
4	0.166	14.19	9.58	23.77	-31.39	55.16	Average
5	0.194	32.49	9.60	42.09	-21.77	63.86	QP
6	0.194	15.59	9.60	25.19	-28.67	53.86	Average
7	0.254	25.00	9.61	34.61	-27.01	61.63	QP
8	0.254	9.00	9.61	18.61	-33.01	51.63	Average
9	0.438	23.35	9.60	32.95	-24.15	57.10	QP
10	* 0.438	16.75	9.60	26.35	-20.75	47.10	Average
11	13.570	21.09	9.92	31.01	-28.99	60.00	QP
12	13.570	14.39	9.92	24.31	-25.69	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX6600 Tri-Band Wi-Fi 6 Gaming Router	Date of Test	2020-05-16
Factor	CE_ENV216-N (Filter ON)_2020	Temp. / Humidity	25.2°C /47.6%
Polarity	Neutral	Site / Test Engineer	SR2 / Peter Xu
Test Mode	1	Test Voltage	120V/60Hz

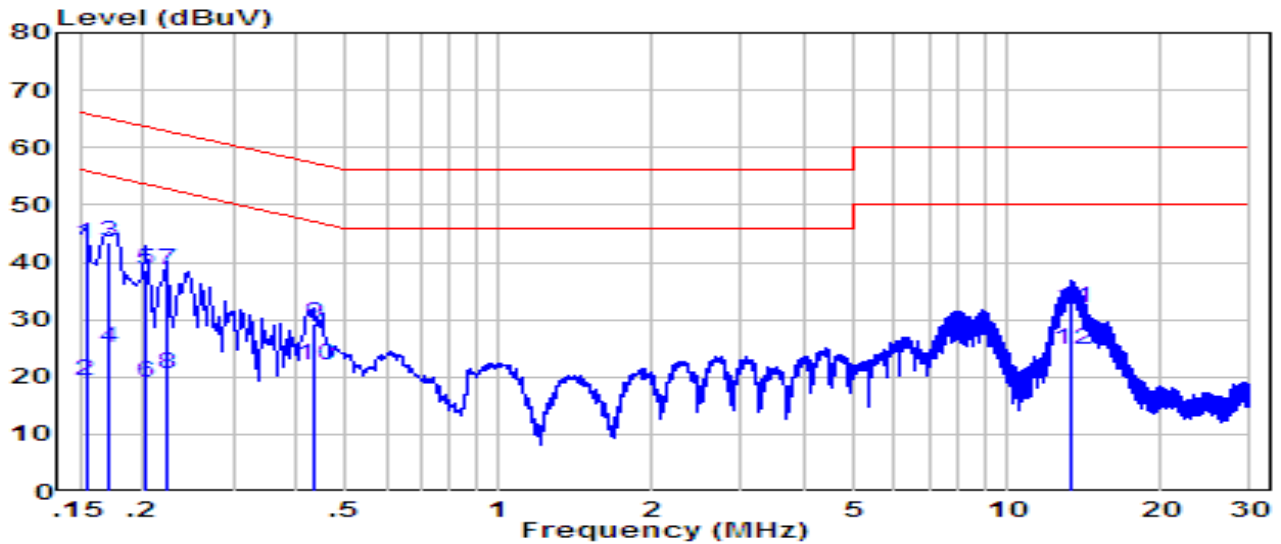

No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	0.154	33.62	9.62	43.23	-22.55	65.78	QP
2	0.154	9.82	9.62	19.43	-36.35	55.78	Average
3	* 0.170	33.83	9.61	43.43	-21.53	64.96	QP
4	0.170	15.43	9.61	25.03	-29.93	54.96	Average
5	0.202	29.12	9.61	38.73	-24.79	63.53	QP
6	0.202	9.52	9.61	19.13	-34.39	53.53	Average
7	0.223	28.92	9.61	38.53	-24.17	62.71	QP
8	0.223	10.82	9.61	20.43	-32.27	52.71	Average
9	0.434	19.66	9.61	29.27	-27.90	57.18	QP
10	0.434	12.46	9.61	22.07	-25.10	47.18	Average
11	13.400	21.95	9.94	31.89	-28.11	60.00	QP
12	13.400	14.85	9.94	24.79	-25.21	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15E of the FCC Rules.

The End

Appendix A - Test Setup Photograph

Refer to “2004TW0002-UT” file.

Appendix B - EUT Photograph

Refer to "2004TW0002-UE" file.