

FCC Radio Test Report

FCC ID: TE7M4R

This report concerns (check one): Original Grant Class I Change Class II Change

Project No. : 1806C057
Equipment : AC1200 Whole Home Mesh Wi-Fi System
Test Model : Deco M4R
Series Model : N/A
Applicant : TP-Link Technologies Co., Ltd.
Address : Building 24 (floors 1,3,4,5) and 28 (floors1-4) Central Science and Technology Park,Shennan Rd, Nanshan, Shenzhen,China

Date of Receipt : Jun. 13, 2018
Date of Test : Jun. 15, 2018 ~ Sep. 17, 2018
Issued Date : Sep. 29, 2018
Tested by : BTL Inc.

Testing Engineer : Welly Zhou
(Welly Zhou)

Technical Manager : Shawn Xiao
(Shawn Xiao)

Authorized Signatory : Steven Lu
(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	6
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	12
3.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	14
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	16
3.5 DESCRIPTION OF SUPPORT UNITS	16
4 . EMC EMISSION TEST	17
4.1 CONDUCTED EMISSION MEASUREMENT	17
4.1.1 POWER LINE CONDUCTED EMISSION	17
4.1.2 TEST PROCEDURE	17
4.1.3 DEVIATION FROM TEST STANDARD	17
4.1.4 TEST SETUP	18
4.1.5 EUT OPERATING CONDITIONS	18
4.1.6 EUT TEST CONDITIONS	18
4.1.7 TEST RESULTS	18
4.2 RADIATED EMISSION MEASUREMENT	19
4.2.1 RADIATED EMISSION LIMITS	19
4.2.2 TEST PROCEDURE	20
4.2.3 DEVIATION FROM TEST STANDARD	20
4.2.4 TEST SETUP	20
4.2.5 EUT OPERATING CONDITIONS	21
4.2.6 EUT TEST CONDITIONS	21
4.2.7 TEST RESULTS (9 kHz TO 30 MHz)	22
4.2.8 TEST RESULTS (30 MHz TO 1000 MHz)	22
4.2.9 TEST RESULTS (ABOVE 1000 MHz)	22
5 . SPECTRUM BANDWIDTH	23
5.1 APPLIED PROCEDURES / LIMIT	23
5.1.1 TEST PROCEDURE	23
5.1.2 DEVIATION FROM STANDARD	23
5.1.3 TEST SETUP	24
5.1.4 EUT OPERATION CONDITIONS	24
5.1.5 EUT TEST CONDITIONS	24
5.1.6 TEST RESULTS	24
6 . MAXIMUM OUTPUT POWER	25

Table of Contents	Page
6.1 APPLIED PROCEDURES / LIMIT	25
6.1.1 TEST PROCEDURE	25
6.1.2 DEVIATION FROM STANDARD	26
6.1.3 TEST SETUP	26
6.1.4 EUT OPERATION CONDITIONS	26
6.1.5 EUT TEST CONDITIONS	26
6.1.6 TEST RESULTS	26
7 . POWER SPECTRAL DENSITY TEST	27
7.1 APPLIED PROCEDURES / LIMIT	27
7.1.1 TEST PROCEDURE	27
7.1.2 DEVIATION FROM STANDARD	28
7.1.3 TEST SETUP	28
7.1.4 EUT OPERATION CONDITIONS	28
7.1.5 EUT TEST CONDITIONS	28
7.1.6 TEST RESULTS	28
8 . FREQUENCY STABILITY MEASUREMENT	29
8.1 APPLIED PROCEDURES / LIMIT	29
8.1.1 TEST PROCEDURE	29
8.1.2 DEVIATION FROM STANDARD	29
8.1.3 TEST SETUP	30
8.1.4 EUT OPERATION CONDITIONS	30
8.1.5 EUT TEST CONDITIONS	30
8.1.6 TEST RESULTS	30
9 . MEASUREMENT INSTRUMENTS LIST	31
10 . EUT TEST PHOTOS	33
APPENDIX A - CONDUCTED EMISSION	37
APPENDIX B - RADIATED EMISSION (9 KHZ TO 30 MHZ)	40
APPENDIX C - RADIATED EMISSION (30 MHZ TO 1000 MHZ)	45
APPENDIX D - RADIATED EMISSION (ABOVE 1000 MHZ)	58
APPENDIX E - BANDWIDTH	177
APPENDIX F - MAXIMUM OUTPUT POWER	218
APPENDIX G - POWER SPECTRAL DENSITY	247
APPENDIX H - FREQUENCY STABILITY	350

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-2-1806C057	Original Issue.	Sep. 29, 2018

1. CERTIFICATION

Equipment : AC1200 Whole Home Mesh Wi-Fi System
Brand Name : tp-link
Test Model : Deco M4R
Series Model : N/A
Applicant : TP-Link Technologies Co., Ltd.
Manufacturer : TP-Link Technologies Co., Ltd.
Address : Building 24 (floors 1,3,4,5) and 28 (floors1-4) Central Science and Technology
Park,Shennan Rd, Nanshan, Shenzhen,China
Date of Test : Jun. 15, 2018 ~ Sep. 17, 2018
Test Sample : Engineering Sample No.: D180604963
Standard(s) : FCC Part15, Subpart E(15.407) / ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-2-1806C057) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of NVLAP according to the ISO-17025 quality assessment standard and technical standard(s).

Test results included in this report is only for the RLAN 5GHz UNII-1 & UNII-3 part.

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart E(15.407)			
Standard(s) Section	Test Item	Judgment	Remark
15.207	AC Power Line Conducted Emissions	PASS	
15.407(a)	Spectrum Bandwidth	PASS	
15.407(a)	Maximum Output Power	PASS	
15.407(a)	Power Spectral Density	PASS	
15.407(a)	Radiated Emissions	PASS	
15.407(b)	Band Edge Emissions	PASS	
15.407(g)	Frequency Stability	PASS	
15.203	Antenna Requirements	PASS	

Note:

(1) "N/A" denotes test is not applicable in this test report.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3,Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's test firm number for FCC: 854385

BTL's designation number for FCC: CN5020

2.2 MEASUREMENT UNCERTAINTY

The measurement uncertainty figures shall be calculated according the methods described in the ETSI TR 100 028 and shall correspond to an expansion factor (coverage factor) $k=1.96$ or $k=2$ (which provide confidence levels of respectively 90% and 95.45% in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian)). Measurement Uncertainty for a Level of Confidence of 95 %, $U=2 \times U_c(y)$.

The BTL measurement uncertainty as below table:

A. Conducted Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150 KHz ~ 30 MHz	2.32

B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9 kHz~30 MHz	V	3.79
		9 kHz~30 MHz	H	3.57
		30 MHz~200 MHz	V	3.82
		30 MHz~200 MHz	H	3.60
		200 MHz~1,000 MHz	V	3.86
		200 MHz~1,000 MHz	H	3.94
		1 GHz~18 GHz	V	3.12
		1 GHz~18 GHz	H	3.68
		18 GHz~40 GHz	V	4.15
		18 GHz~40 GHz	H	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	AC1200 Whole Home Mesh Wi-Fi System	
Brand Name	tp-link	
Test Model	Deco M4R	
Series Model	N/A	
Model Difference(s)	N/A	
Software Version	1.0.0	
Hardware Version	1.0	
Product Description	Operation Frequency	UNII-1: 5150 MHz ~ 5250MHz UNII-3: 5725 MHz ~ 5825MHz
	Modulation Technology	OFDM
	Bit Rate of Transmitter	866 Mbps
	Output Power (Max.)for UNII-1_ Non-Beamforming	802.11a: 26.85dBm 802.11n(20M): 26.52dBm 802.11n(40M): 25.69dBm 802.11ac(20M): 26.51dBm 802.11ac(40M): 25.71dBm 802.11ac(80M): 20.83dBm
	Output Power (Max.)for UNII-3_ Non-Beamforming	802.11a: 26.96dBm 802.11n(20M): 26.76dBm 802.11n(40M): 26.93dBm 802.11ac(20M): 26.81dBm 802.11ac(40M): 26.93dBm 802.11ac(80M): 26.94dBm
	Output Power (Max.)for UNII-1_ Beamforming	802.11n(20M): 26.37dBm 802.11n(40M): 25.62dBm 802.11ac(20M): 26.34dBm 802.11ac(40M): 25.64dBm 802.11ac(80M): 20.65dBm
	Output Power (Max.)for UNII-3_ Beamforming	802.11n(20M): 26.60dBm 802.11n(40M): 26.65dBm 802.11ac(20M): 26.51dBm 802.11ac(40M): 26.65dBm 802.11ac(80M): 26.56dBm
Power Source	DC voltage supplied from AC/DC adapter. Model: T120120-2B4 Manufacturer: TP-Link Technologies Co., Ltd.	
Power Rating	I/P: 100-240V~ 50/60Hz 0.4A O/P: 12V---1.2A	

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- Channel List:

802.11a 802.11n(20 MHz) 802.11ac(20 MHz)		802.11n(40 MHz) 802.11ac(40 MHz)		802.11ac(80 MHz)	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

802.11a 802.11n(20 MHz) 802.11ac(20 MHz)		802.11n(40 MHz) 802.11ac(40 MHz)		802.11ac(80 MHz)	
UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

3. Antenna Specification:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain(dBi)
1	N/A	N/A	PCB	N/A	0.89
2	N/A	N/A	PCB	N/A	0.91

Note:

- This EUT supports MIMO 2X2, any transmit signals are correlated with each other, so Directional gain = $10\log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N]$ dBi, that is Directional gain = $10\log[(10^{0.89/20} + 10^{0.97/20})^2 / N]$ dBi = 3.91.
- Beamforming Gain: 3.01dBi, so Directional gain = 3.01 + 0.91 = 3.92.

4.

Operating Mode	TX Mode	2TX
802.11a		V (ANT 1+ANT 2)
802.11n(20 MHz)		V (ANT 1+ANT 2)
802.11n(40 MHz)		V (ANT 1+ANT 2)
802.11ac(20 MHz)		V (ANT 1+ANT 2)
802.11ac(40 MHz)		V (ANT 1+ANT 2)
802.11ac(80 MHz)		V (ANT 1+ANT 2)

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48 (UNII-1)
Mode 2	TX N20 Mode / CH36, CH40, CH48 (UNII-1)
Mode 3	TX N40 Mode / CH38, CH46 (UNII-1)
Mode 4	TX AC20 Mode / CH36, CH40, CH48 (UNII-1)
Mode 5	TX AC40 Mode / CH38, CH46 (UNII-1)
Mode 6	TX AC80 Mode / CH42 (UNII-1)
Mode 7	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 8	TX N20 Mode / CH149,CH157,CH165 (UNII-3)
Mode 9	TX N40 Mode / CH151,CH159 (UNII-3)
Mode 10	TX AC20 Mode / CH149,CH157,CH165 (UNII-3)
Mode 11	TX AC40 Mode / CH151,CH159 (UNII-3)
Mode 12	TX AC80 Mode / CH155 (UNII-3)
Mode 13	TX Mode

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 13	TX Mode

For Radiated Test	
Final Test Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48 (UNII-1)
Mode 2	TX N20 Mode / CH36, CH40, CH48 (UNII-1)
Mode 3	TX N40 Mode / CH38, CH46 (UNII-1)
Mode 4	TX AC20 Mode / CH36, CH40, CH48 (UNII-1)
Mode 5	TX AC40 Mode / CH38, CH46 (UNII-1)
Mode 6	TX AC80 Mode / CH42 (UNII-1)
Mode 7	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 8	TX N20 Mode / CH149,CH157,CH165 (UNII-3)
Mode 9	TX N40 Mode / CH151,CH159 (UNII-3)
Mode 10	TX AC20 Mode / CH149,CH157,CH165 (UNII-3)
Mode 11	TX AC40 Mode / CH151,CH159 (UNII-3)
Mode 12	TX AC80 Mode / CH155 (UNII-3)

Note:

- (1) For radiated 30 MHz to 1000 MHz test, the 802.11a mode is found to be the worst case and recorded.

3.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product

Non-Beamforming

UNII-1			
Test Software Version	QRCT		
Frequency (MHz)	5180	5200	5240
A Mode	22	24	24
N20 Mode	22	24	24
AC20 Mode	21.5	24	24
Frequency (MHz)	5190	5230	
N40 Mode	18.5	22.5	
AC40 Mode	19	22.5	
Frequency (MHz)	5210		
AC80 Mode	18		


UNII-3			
Test Software Version	QRCT		
Frequency (MHz)	5745	5785	5825
A Mode	25	25	25
N20 Mode	25	25	25
AC20 Mode	25	25	25
Frequency (MHz)	5755	5795	
N40 Mode	24	24	
AC40 Mode	24	24	
Frequency (MHz)	5775		
AC80 Mode	22		

With Beamforming

UNII-1			
Test Software Version	QRCT		
Frequency (MHz)	5180	5200	5240
N20 Mode	22	24	24
AC20 Mode	21.5	24	24
Frequency (MHz)	5190	5230	
N40 Mode	18.5	22.5	
AC40 Mode	19	22.5	
Frequency (MHz)	5210		
AC80 Mode	18		

UNII-3			
Test Software Version	QRCT		
Frequency (MHz)	5745	5785	5825
N20 Mode	25	25	25
AC20 Mode	25	25	25
Frequency (MHz)	5755	5795	
N40 Mode	24	24	
AC40 Mode	24	24	
Frequency (MHz)	5775		
AC80 Mode	22		

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

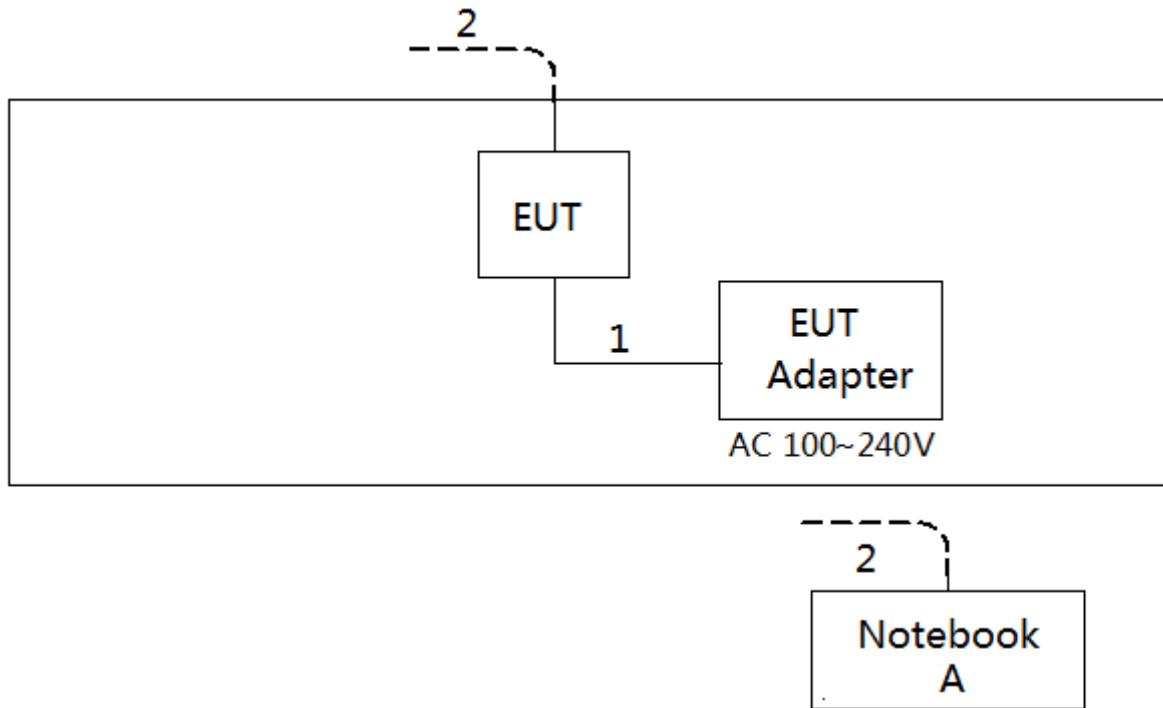

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	Notebook	Lenovo	G410	N/A	N/A

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.5m	DC Cable
2	NO	NO	10m	RJ45 Cable

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150 kHz-30 MHz)

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 -0.50	66to 56*	56 to 46*
0.50 -5.0	56	46
5.0 -30.0	60	50

Note:

- (1) The tighter limit applies at the band edges.
- (2) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

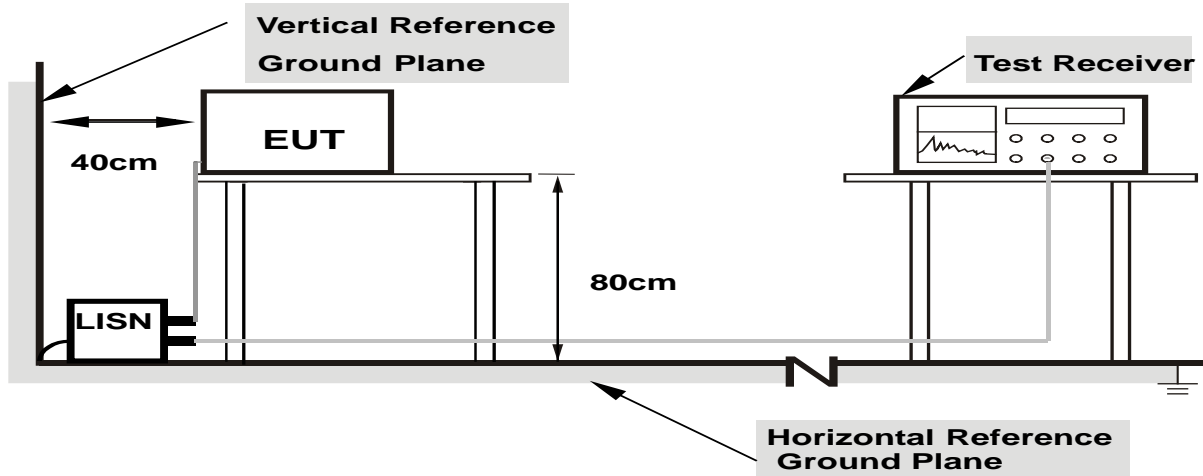

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data. The EUT was programmed to be in continuously transmitting/TX Mode mode.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 53% Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Appendix A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a " * " marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150kHz to 30MHz.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Frequencies (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dBμV/m)
5150-5250	-27	68.3
5725-5850	-27(Note 2)	68.3
	10(Note 2)	105.3
	15.6(Note 2)	110.9
	27(Note 2)	122.3

Note:

1. The following formula is used to convert the equipment isotropic radiated power (eirp) to

field strength: $E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m}$, where P is the eirp (Watts)

2. According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

4.2.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A)Radiated Emission Test Set-Up Frequency 30 MHz-1000 MHz

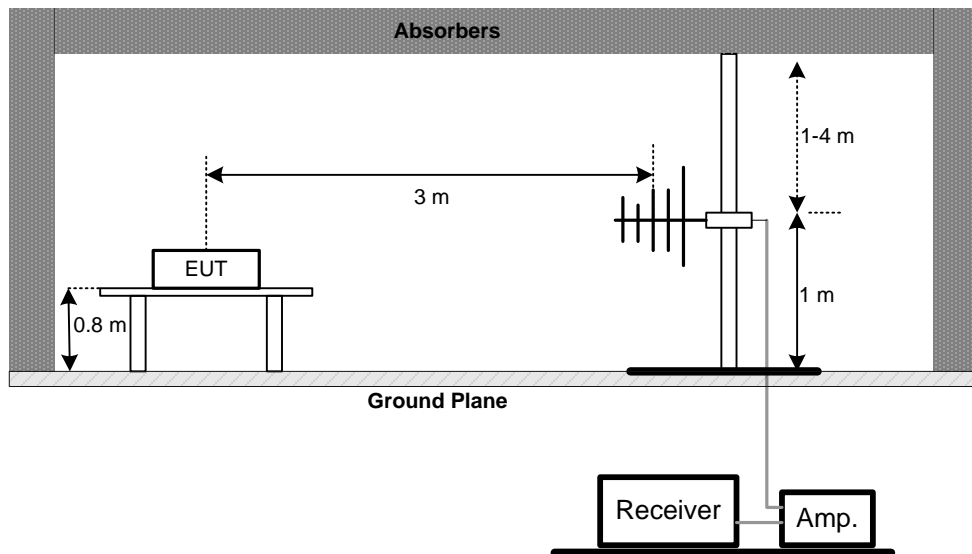

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

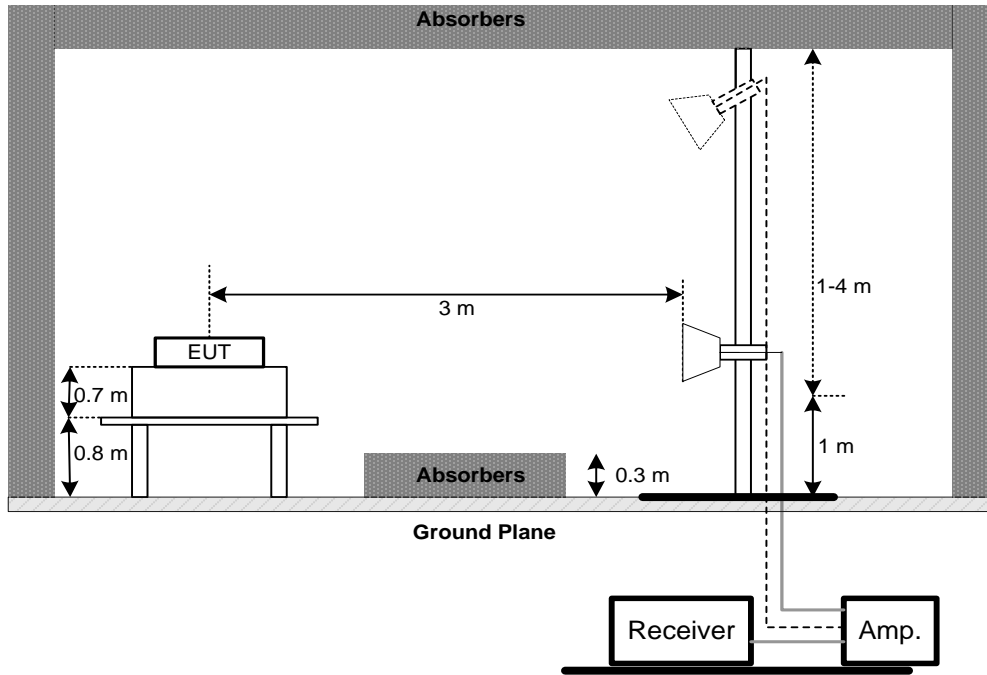

(C) Radiated emissions below 30 MHz

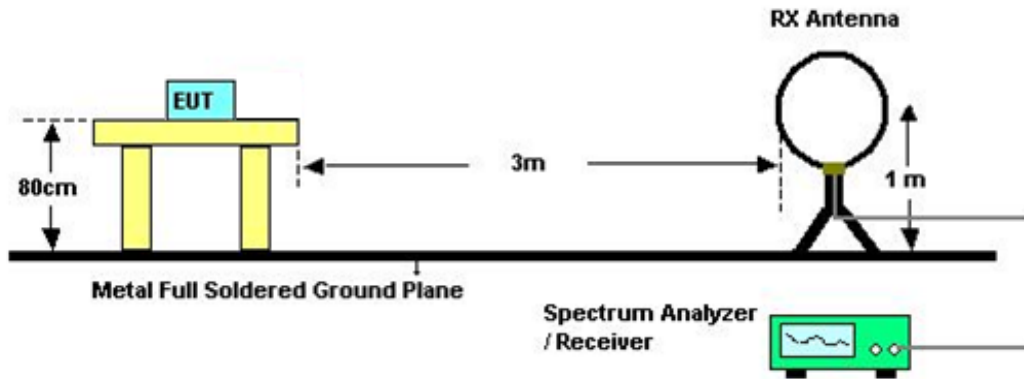

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

4.2.7 TEST RESULTS (9 kHz TO 30 MHz)

Please refer to the Appendix B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.2.8 TEST RESULTS (30 MHz TO 1000 MHz)

Please refer to the Appendix C.

4.2.9 TEST RESULTS (ABOVE 1000 MHz)

Please refer to the Appendix D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. SPECTRUM BANDWIDTH

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Bandwidth	26 dB Bandwidth	5150-5250	PASS
	Minimum 500kHz 6 dB Bandwidth	5725-5850	PASS

5.1.1 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below

b.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26 dB Bandwidth
RBW	300 kHz(Bandwidth 20 MHz) 1 MHz(Bandwidth 40 MHz and 80 MHz)
VBW	1 MHz(Bandwidth 20 MHz) 3 MHz(Bandwidth 40 MHz and 80 MHz)
Span Frequency	6 dB Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

c. Measured the spectrum width with power higher than 26 dB below carrier

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

5.1.6 TEST RESULTS

Please refer to the Appendix E.

6. MAXIMUM OUTPUT POWER

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Maximum Output Power	Fixed:1 Watt (30 dBm)	5150-5250	PASS
	Mobile and portable: 250 mW (24 dBm)	5150-5250	PASS
	1 Watt (30 dBm)	5725-5850	PASS

Note: The maximum e.i.r.p at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW(21 dBm)

6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Used spectrum analyzer band power measurement function.
- c.


Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	= 1 MHz.
VBW	≥ 3 MHz.
Sweep points	≥ 2 x span / RBW
Detector	RMS
Trace	Trace average at least 100 traces in power averaging(rms) mode.
Sweep Time	auto

- c. Test was performed in accordance with method of KDB 789033 D02.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP

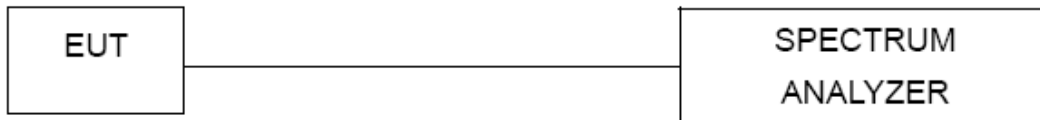

6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

6.1.6 TEST RESULTS

Please refer to the Appendix F.

7. POWER SPECTRAL DENSITY TEST

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Power Spectral Density	Other then Mobile and portable: 17 dBm/MHz	5150-5250	PASS
	Mobile and portable:11 dBm/MHz	5150-5250	PASS
	30 dBm/500kHz	5725-5850	PASS

7.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	= 1 MHz.
VBW	≥ 3 MHz.
Detector	RMS
Trace average	100 trace
Sweep Time	Auto


Note:

1. For UNII-3, according to KDB publication 789033 D02 General UNII Test Procedures New Rules v01r02, section II.F.5., it is acceptable to set RBW at 1 MHz and VBW at 3 MHz if the spectrum analyzer does not have 500 kHz RBW.
2. The value measured with RBW=1 MHz is to be added with $10\log(500\text{ kHz}/1\text{ MHz})$ which is -3 dB. For example, if the measured value is +10dBm using RBW=1 MHz (that is +10 dBm/MHz), then the converted value will be +7dBm/500kHz.

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP

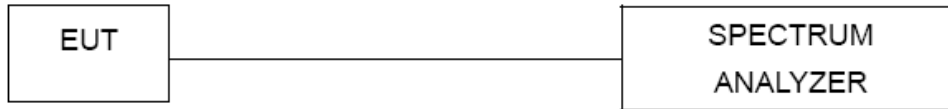

7.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

7.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

7.1.6 TEST RESULTS

Please refer to the Appendix H.

8. FREQUENCY STABILITY MEASUREMENT

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Frequency Stability	Specified in the user's manual	5150-5250	PASS
		5725-5850	PASS

8.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b.


Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

- c. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
- d. User manual temperature is 0°C~40°C.

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP

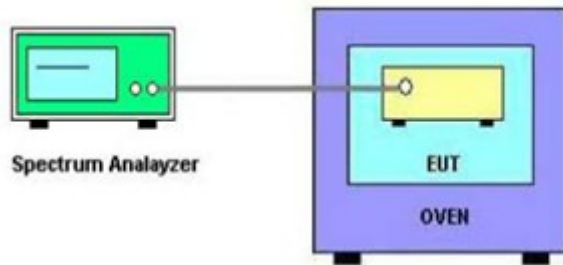

8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

8.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

8.1.6 TEST RESULTS

Please refer to the Appendix I.

9. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	100382	Mar. 11, 2019
2	LISN	EMCO	3816/2	52765	Mar. 11, 2019
3	50Ω Terminator	SHX	TF2-3G-A	8122901	Mar. 11, 2019
4	TWO-LINE V-NETWORK	R&S	ENV216	101447	Mar. 11, 2019
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	Cable	N/A	RG223	12m	Mar. 23, 2019

Radiated Emission Measurement - 9KHZ TO 30MHZ					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Loop Antenna	EM	EM-6876-1	230	Feb. 07, 2019
2	Cable	N/A	RG 213/U	C-102	Jun. 01, 2019
3	EMI Test Receiver	R&S	ESCI	100382	Mar. 11, 2019
4	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emission Measurement - 30MHZ TO 1000MHZ					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 11, 2019
2	Amplifier	HP	8447D	2944A09673	Aug. 11, 2019
3	Receiver	Agilent	N9038A	MY52130039	Aug. 11, 2019
4	Cable	emci	LMR-400(30MHz-1 GHz)(8m+5m)	N/A	May 25, 2019
5	Controller	CT	SC100	N/A	N/A
6	Controller	MF	MF-7802	MF780208416	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emission Measurement - Above 1GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double Ridged Guide Antenna	ETS	3115	75789	Mar. 11, 2019
2	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Jun. 30, 2019
3	Amplifier	Agilent	8449B	3008A02274	Mar. 11, 2019
4	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 11, 2019
5	Receiver	Agilent	N9038A	MY52130039	Aug. 11, 2019
6	Controller	CT	SC100	N/A	N/A
7	Controller	MF	MF-7802	MF780208416	N/A
8	Cable	mitron	B10-01-01-12M	18072744	Jul. 30, 2019
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Spectrum Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 11, 2019

Maximum Output Power Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 11, 2019

Power Spectral Density Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 11, 2019

Frequency Stability Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 11, 2019
2	Precision Oven Tester	Bell	BTH-50C	20170306001	Mar. 11, 2019

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.



10. EUT TEST PHOTOS

Conducted Measurement Photos





Radiated Measurement Photos

9 kHz to 30 MHz

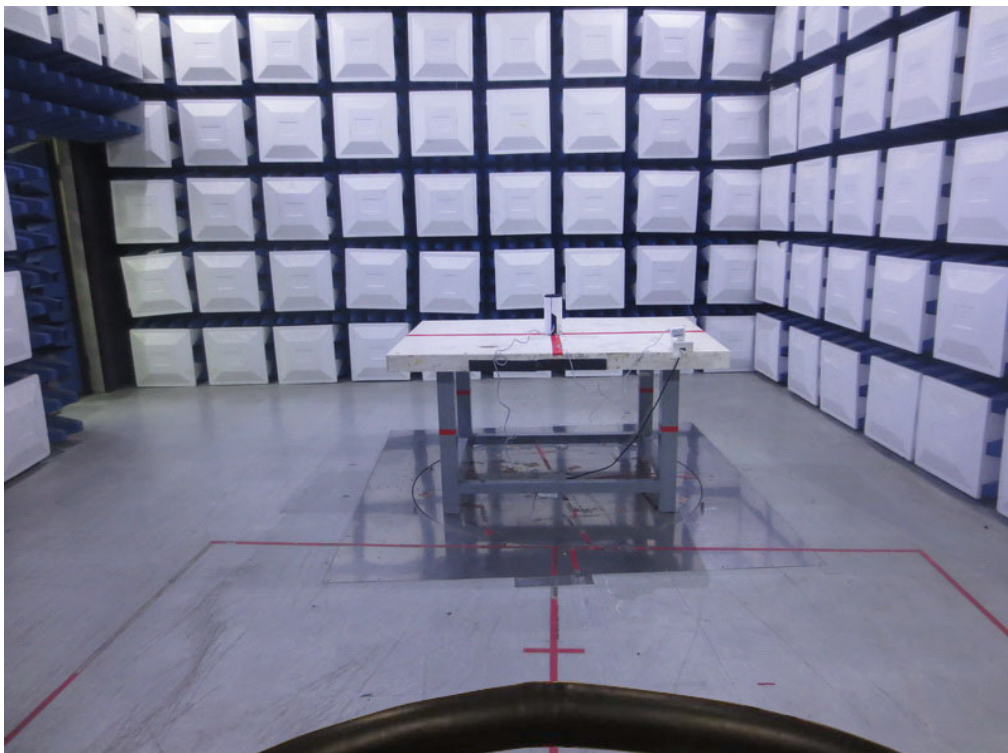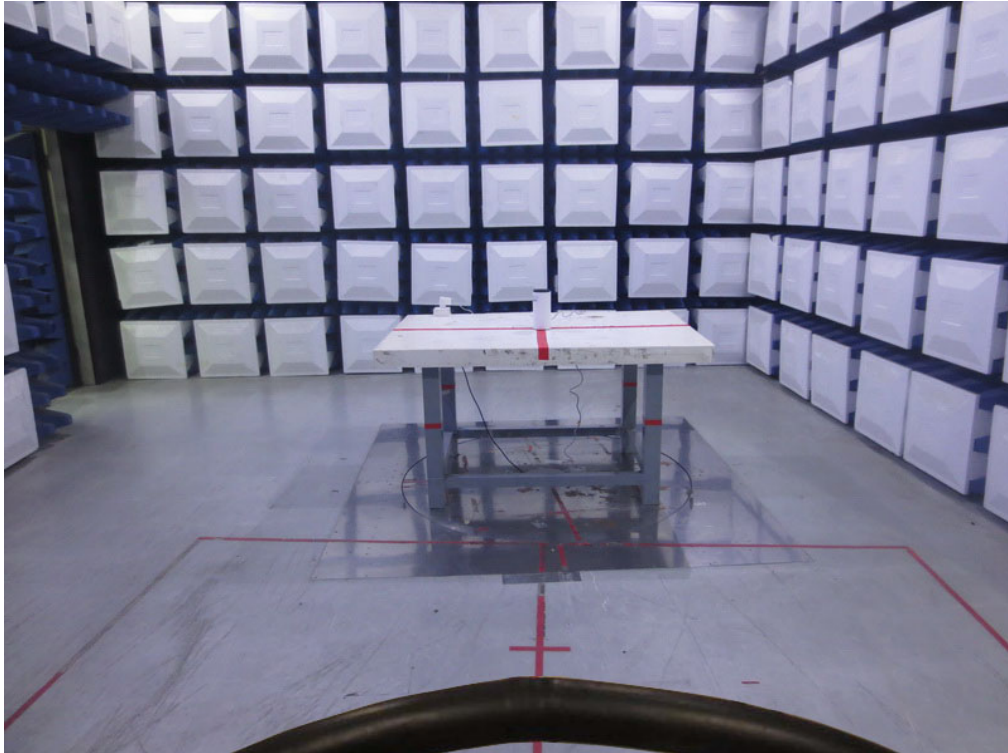



Radiated Measurement Photos

30 MHz to 1000 MHz

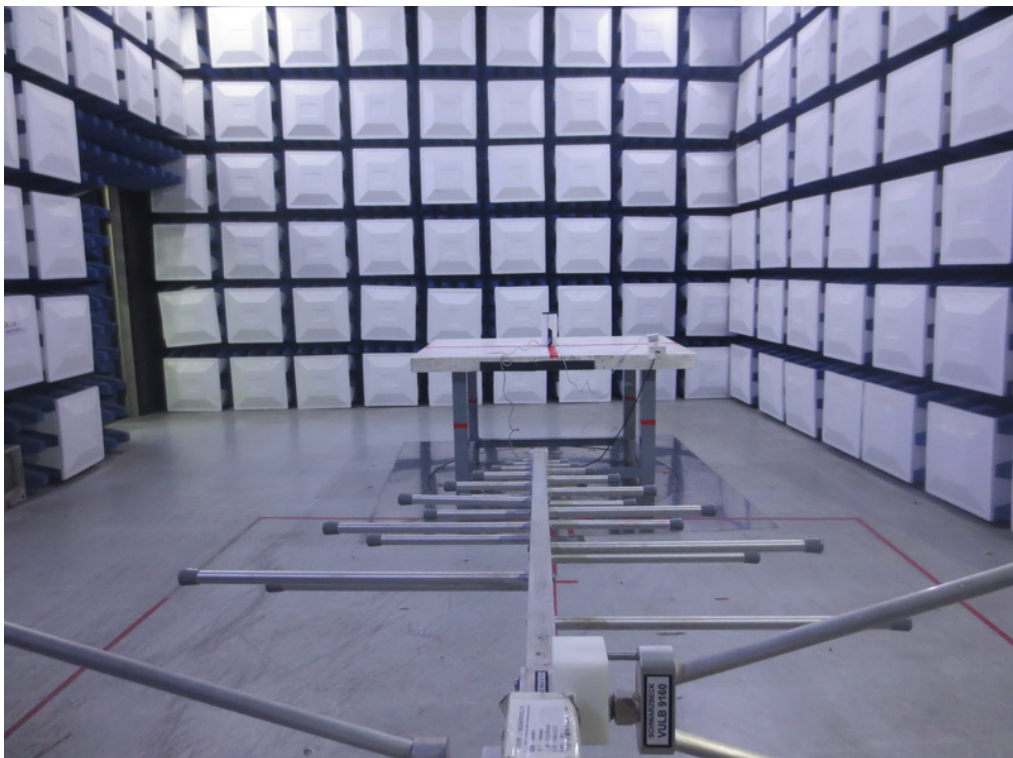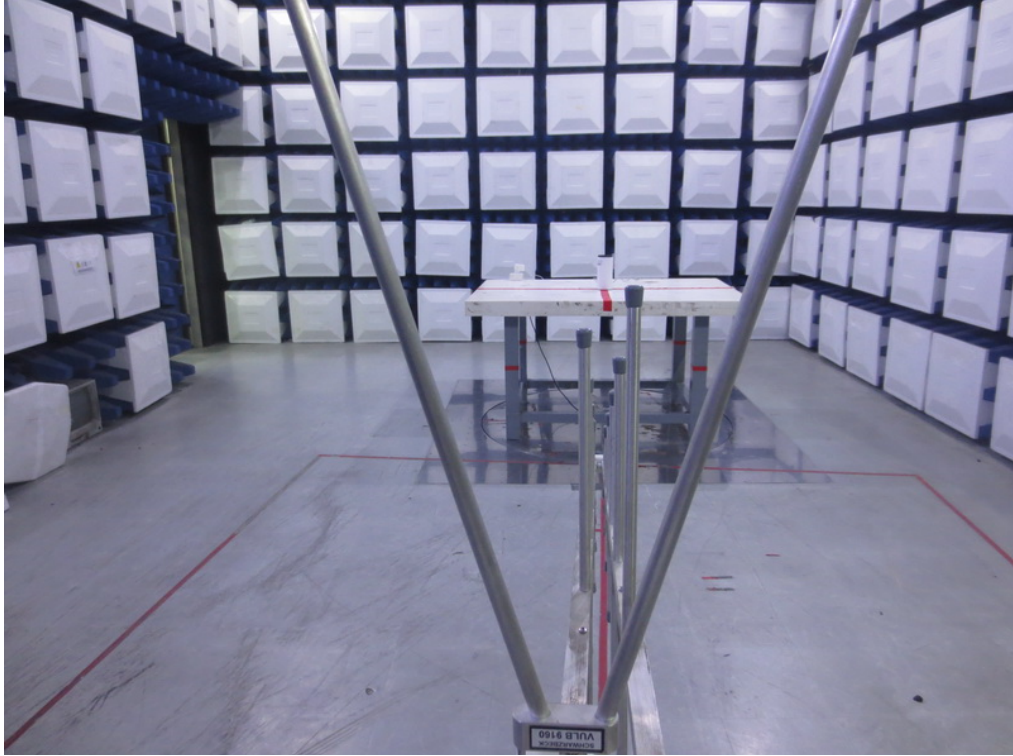

Radiated Measurement Photos


Above 1000 MHz

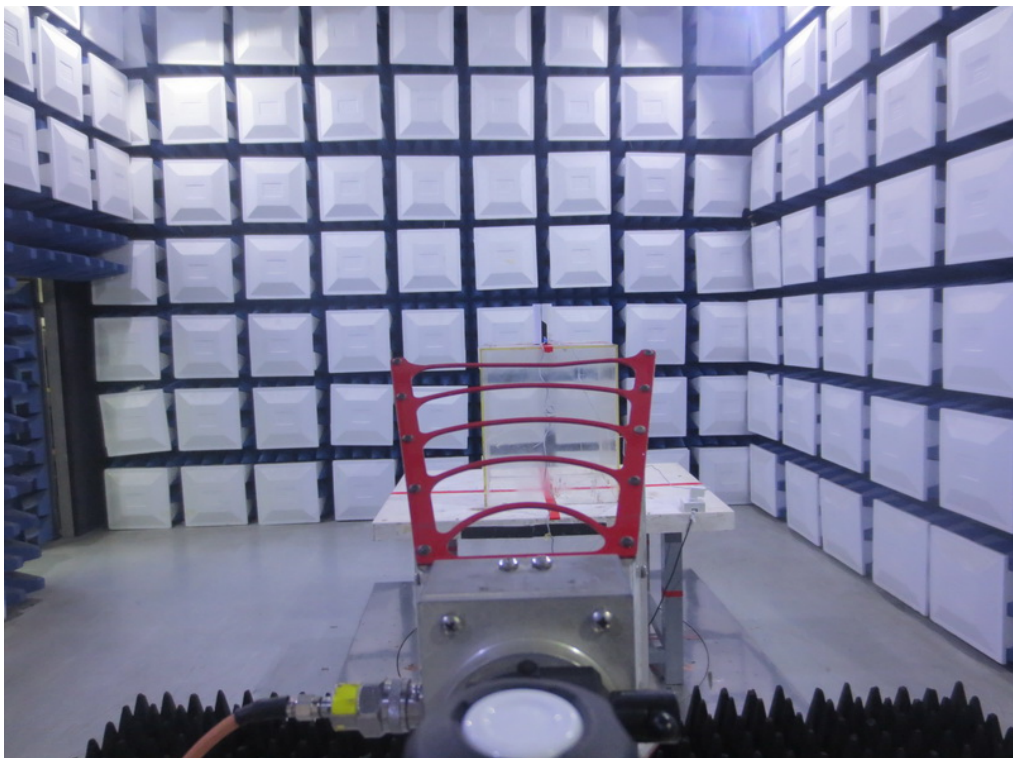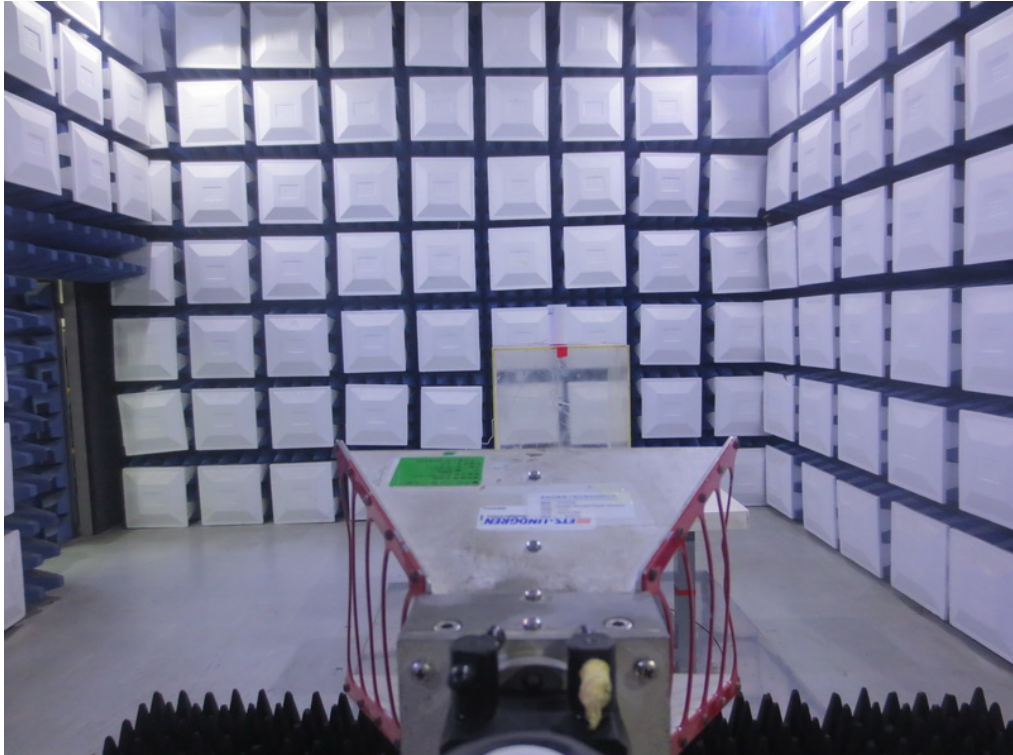

APPENDIX A - CONDUCTED EMISSION

Test Mode: TX Mode

Line

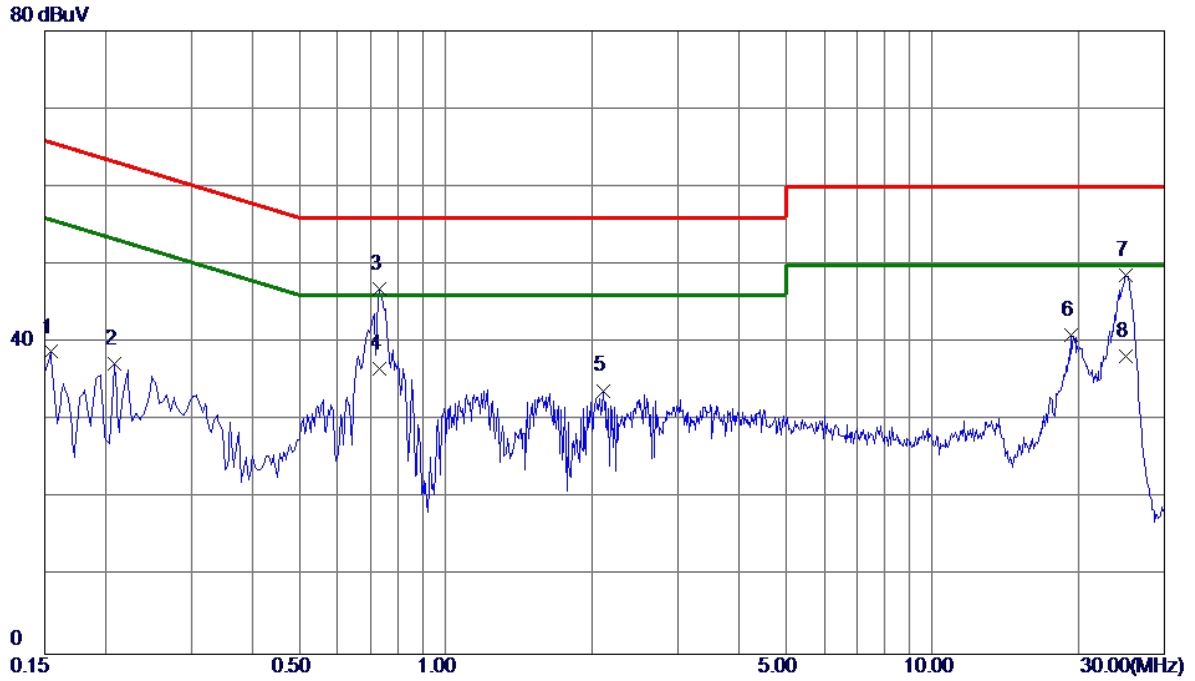


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1545	28.98	9.82	38.80	65.75	-26.95	Peak	
2	0.2085	27.46	9.82	37.28	63.26	-25.98	Peak	
3 *	0.7304	37.01	9.88	46.89	56.00	-9.11	Peak	
4	0.7304	26.80	9.88	36.68	46.00	-9.32	AVG	
5	2.1030	23.84	10.00	33.84	56.00	-22.16	Peak	
6	19.3154	29.79	11.13	40.92	60.00	-19.08	Peak	
7	24.9990	37.45	11.13	48.58	60.00	-11.42	Peak	
8	24.9990	27.10	11.13	38.23	50.00	-11.77	AVG	

Note: The test result has included the cable loss.

Test Mode: TX Mode

Neutral

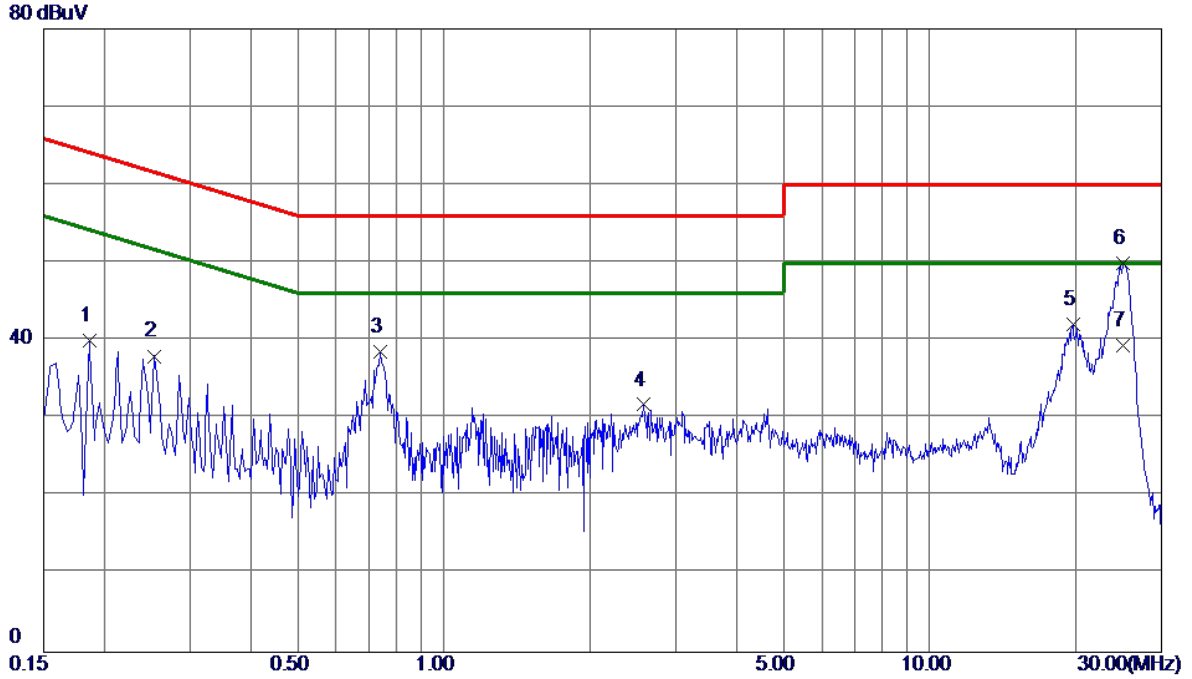


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1860	30.02	9.91	39.93	64.21	-24.28	Peak	
2	0.2535	28.08	9.92	38.00	61.64	-23.64	Peak	
3	0.7395	28.49	10.06	38.55	56.00	-17.45	Peak	
4	2.5755	21.54	10.22	31.76	56.00	-24.24	Peak	
5	19.7205	30.63	11.46	42.09	60.00	-17.91	Peak	
6 *	24.9854	38.49	11.48	49.97	60.00	-10.03	Peak	
7	24.9854	27.81	11.48	39.29	50.00	-10.71	AVG	

Note: The test result has included the cable loss.

APPENDIX B - RADIATED EMISSION (9 KHZ TO 30 MHZ)

Test Mode: TX Mode


Ant 0°

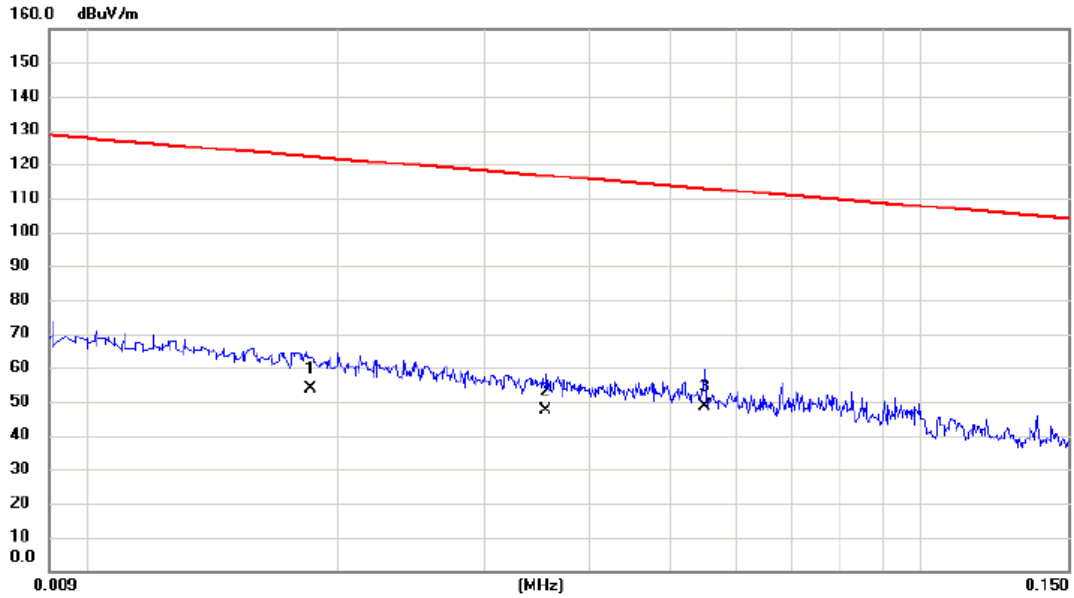

No.	Mk.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.0185	33.50	20.23	53.73	122.26	-68.53	AVG	
2		0.0355	27.60	19.76	47.36	116.60	-69.24	AVG	
3	*	0.0550	29.30	19.43	48.73	112.80	-64.07	AVG	

Test Mode: TX Mode


Ant 0°

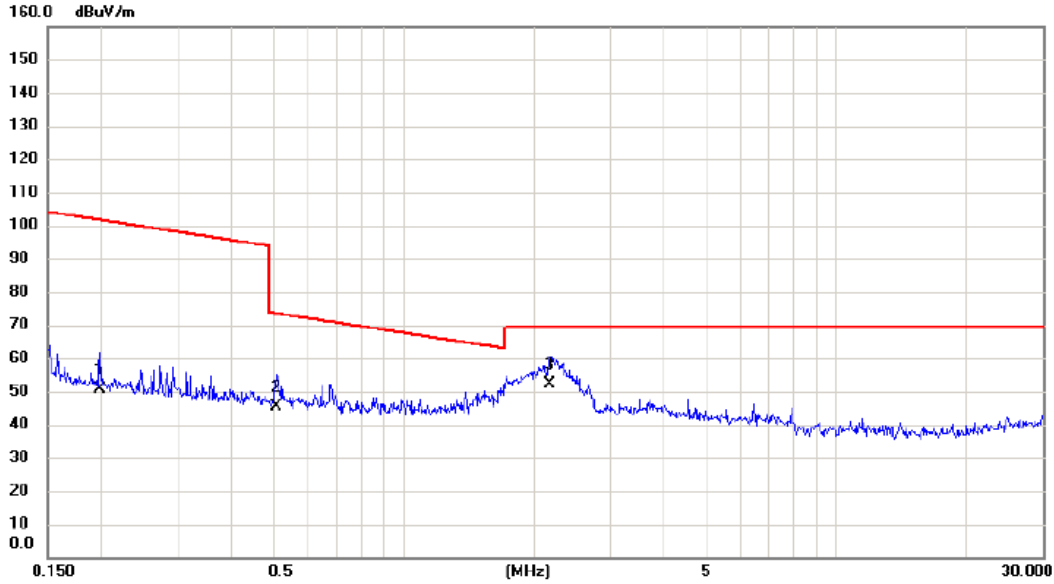

No.	Mk.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.1986	33.60	17.15	50.75	101.65	-50.90	AVG	
2		0.5074	28.30	16.97	45.27	73.50	-28.23	QP	
3	*	2.1783	35.20	17.00	52.20	69.54	-17.34	QP	

Test Mode: TX Mode


Ant 90°

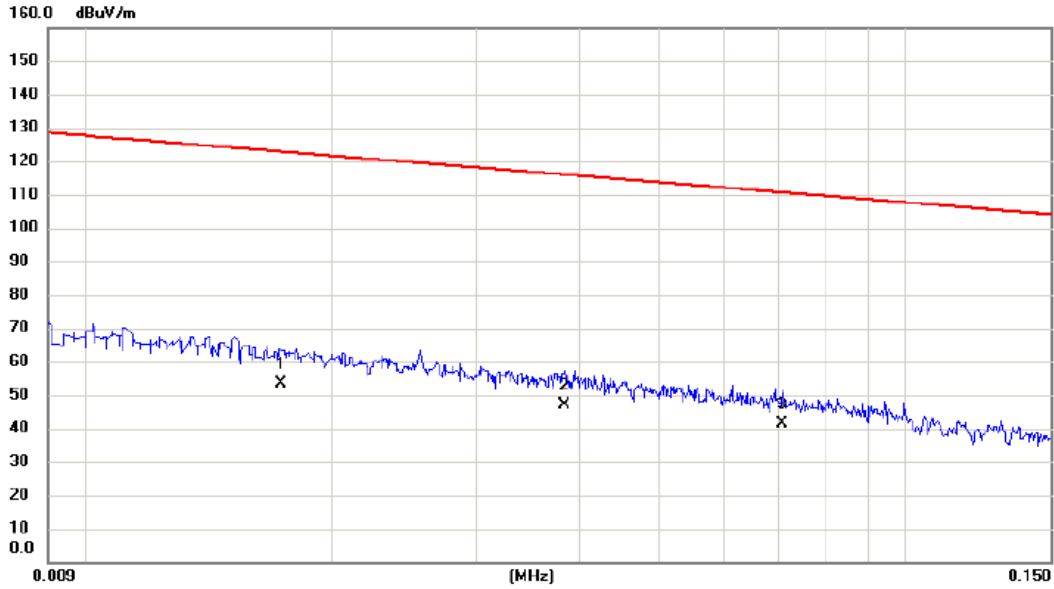

No.	Mk.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.0173	33.10	20.40	53.50	122.84	-69.34	AVG	
2	*	0.0384	27.40	19.71	47.11	115.92	-68.81	AVG	
3		0.0708	22.10	19.11	41.21	110.60	-69.39	AVG	

Test Mode: TX Mode

Ant 90°

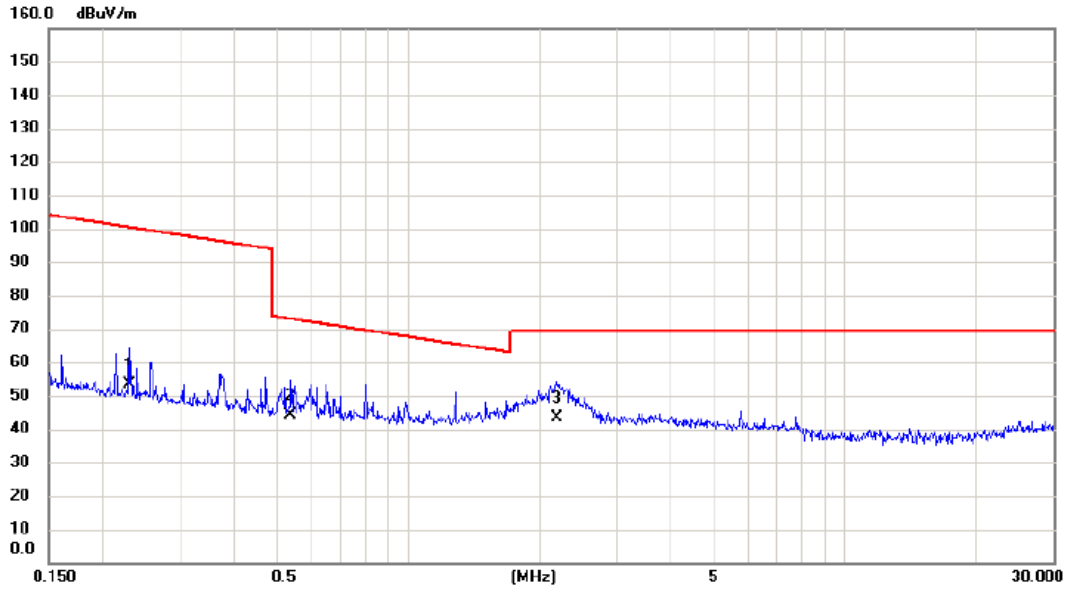


No.	Mk.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.2304	36.40	17.09	53.49	100.36	-46.87	AVG	
2		0.5378	27.10	16.95	44.05	72.99	-28.94	QP	
3	*	2.1898	26.50	17.00	43.50	69.54	-26.04	QP	

APPENDIX C - RADIATED EMISSION (30 MHZ TO 1000 MHZ)

Test Mode: UNII-1/TX A Mode 5180 MHz


Vertical

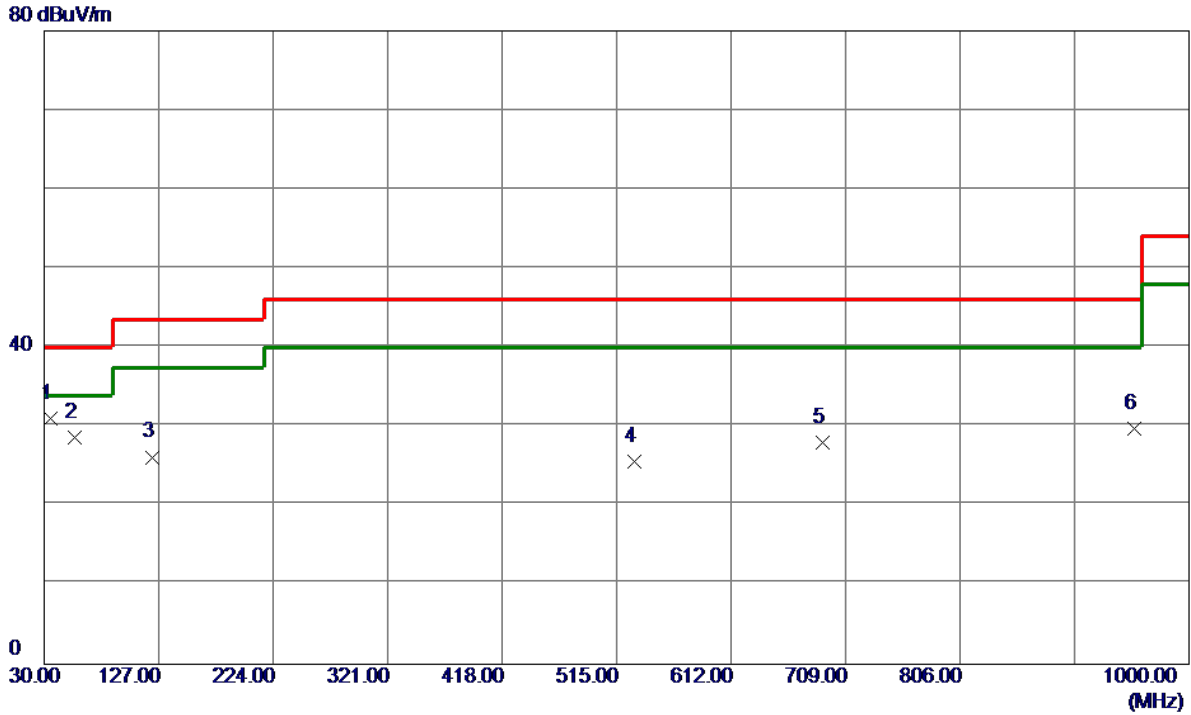

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	35.8200	46.17	-15.16	31.01	40.00	-8.99	Peak	
2	56.1900	43.86	-15.28	28.58	40.00	-11.42	Peak	
3	121.1800	40.98	-14.82	26.16	43.50	-17.34	Peak	
4	530.5200	32.85	-7.28	25.57	46.00	-20.43	Peak	
5	689.6000	32.01	-4.00	28.01	46.00	-17.99	Peak	
6	953.4400	29.34	0.41	29.75	46.00	-16.25	Peak	

Test Mode: UNII-1/TX A Mode 5180 MHz


Horizontal

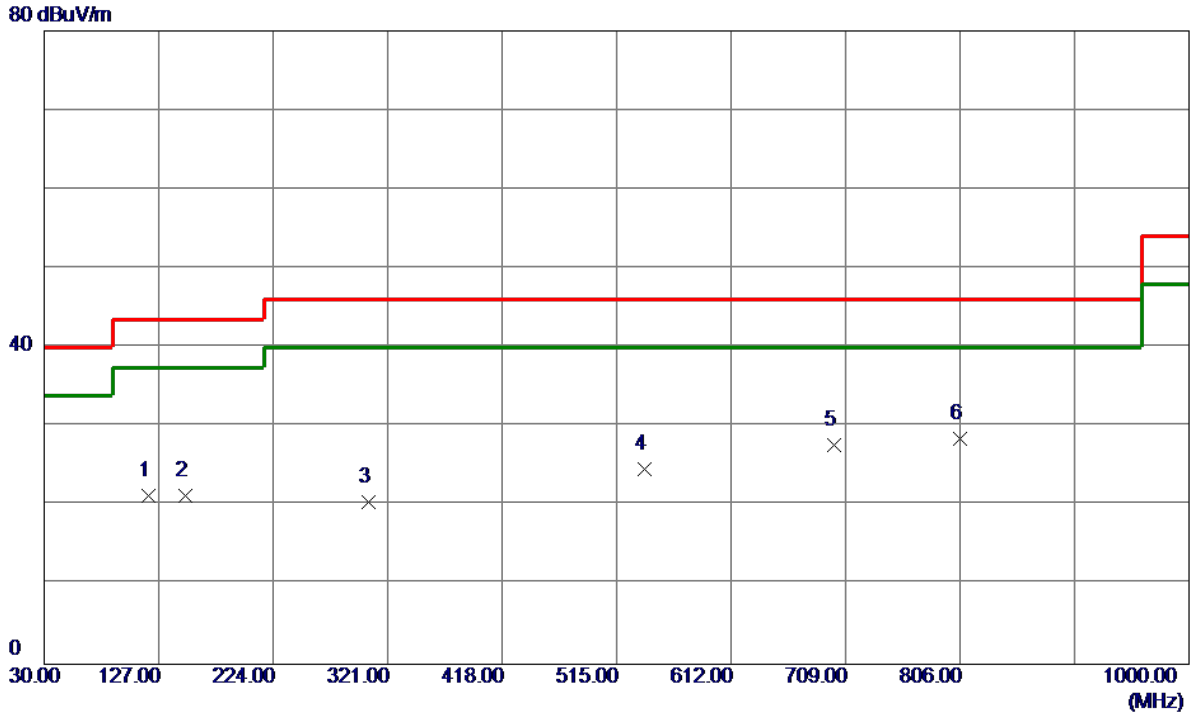

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	118.2700	36.46	-15.25	21.21	43.50	-22.29	Peak	
2	149.3100	33.18	-11.85	21.33	43.50	-22.17	Peak	
3	304.5100	31.43	-10.88	20.55	46.00	-25.45	Peak	
4	538.2800	31.42	-6.81	24.61	46.00	-21.39	Peak	
5	699.3000	31.23	-3.54	27.69	46.00	-18.31	Peak	
6 *	806.0000	30.44	-1.93	28.51	46.00	-17.49	Peak	

Test Mode: UNII-1/TX A Mode 5200 MHz


Vertical

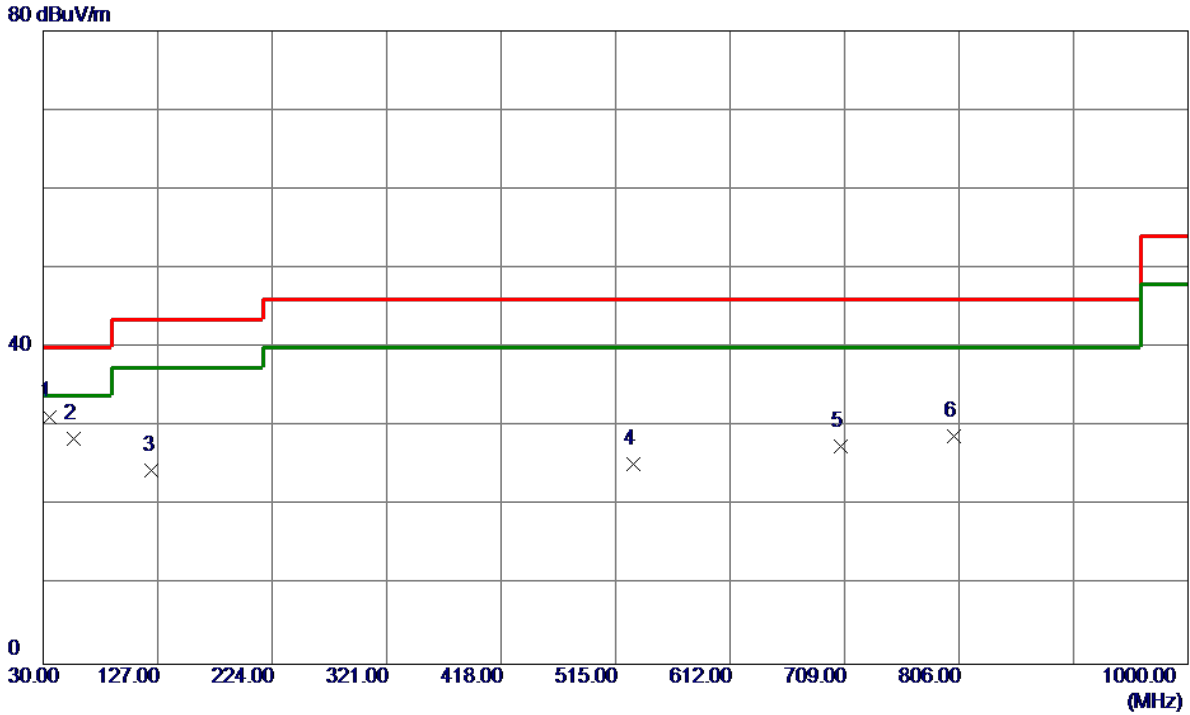

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	35.8200	46.44	-15.16	31.28	40.00	-8.72	Peak	
2	56.1900	43.82	-15.28	28.54	40.00	-11.46	Peak	
3	122.1500	39.22	-14.70	24.52	43.50	-18.98	Peak	
4	530.5200	32.62	-7.28	25.34	46.00	-20.66	Peak	
5	706.0900	31.20	-3.66	27.54	46.00	-18.46	Peak	
6	802.1200	30.66	-1.87	28.79	46.00	-17.21	Peak	

Test Mode: UNII-1/TX A Mode 5200 MHz


Horizontal

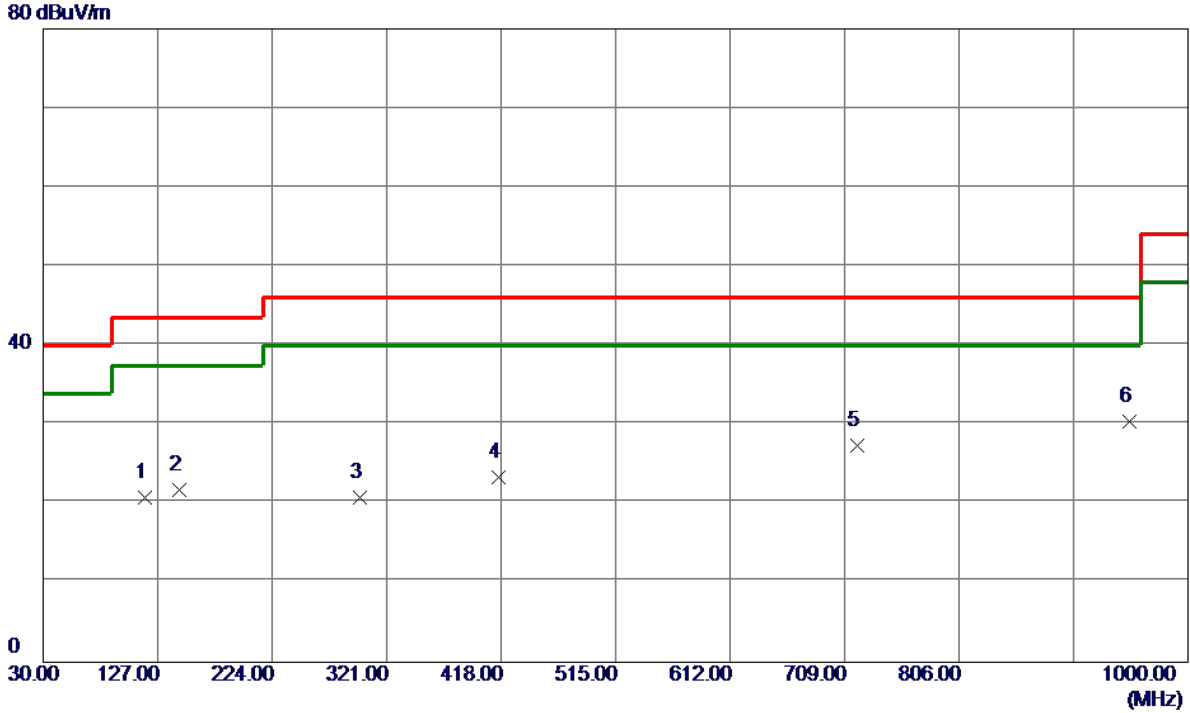

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	116.3300	36.33	-15.56	20.77	43.50	-22.73	Peak	
2	145.4299	33.83	-12.08	21.75	43.50	-21.75	Peak	
3	298.6900	31.65	-10.89	20.76	46.00	-25.24	Peak	
4	416.0600	32.62	-9.27	23.35	46.00	-22.65	Peak	
5	719.6700	31.41	-4.02	27.39	46.00	-18.61	Peak	
6 *	950.5300	29.99	0.48	30.47	46.00	-15.53	Peak	

Test Mode: UNII-1/TX A Mode 5240 MHz


Vertical

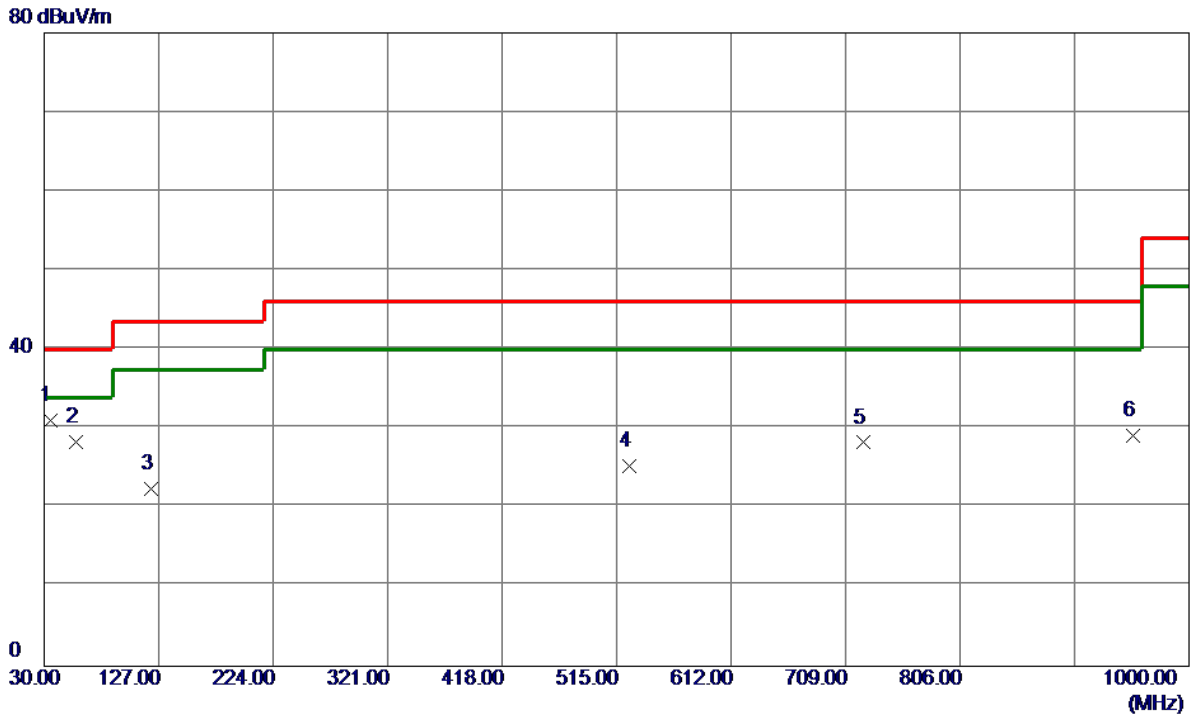

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	34.8500	46.07	-15.08	30.99	40.00	-9.01	Peak	
2	57.1600	43.83	-15.46	28.37	40.00	-11.63	Peak	
3	120.2100	37.41	-14.95	22.46	43.50	-21.04	Peak	
4	525.6700	32.91	-7.57	25.34	46.00	-20.66	Peak	
5	724.5200	32.39	-4.15	28.24	46.00	-17.76	Peak	
6	952.4700	28.62	0.43	29.05	46.00	-16.95	Peak	

Test Mode: UNII-1/TX A Mode 5240 MHz

Horizontal

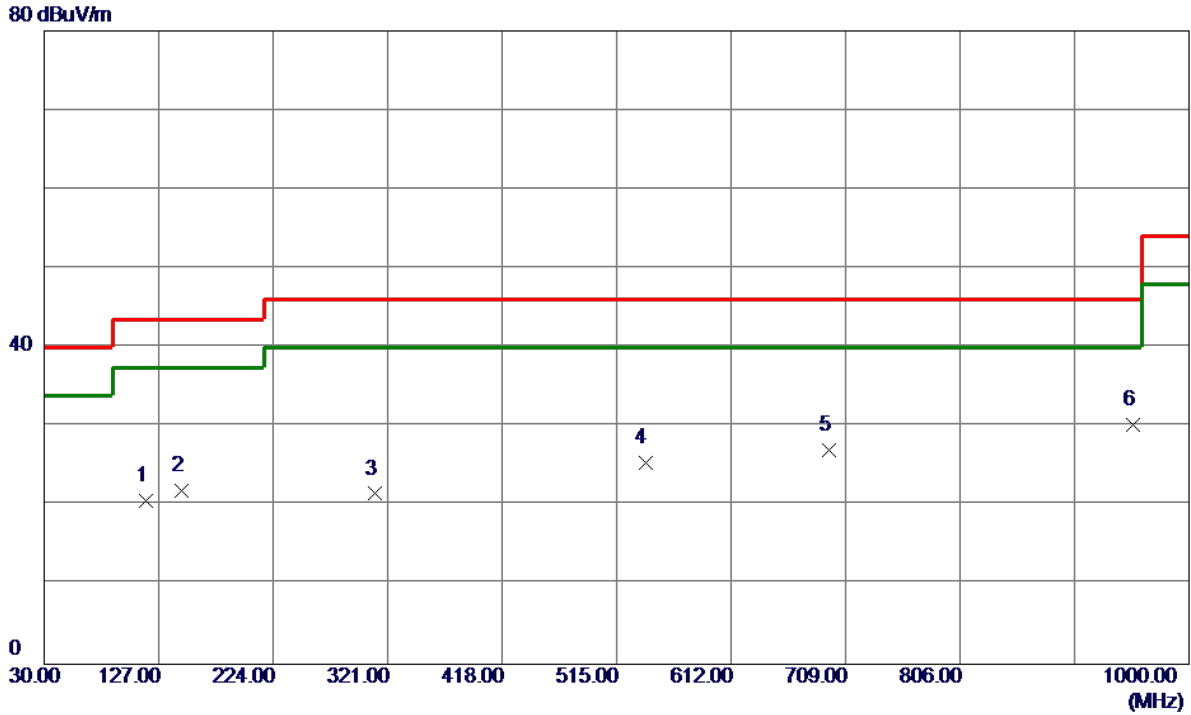


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	116.3300	36.19	-15.56	20.63	43.50	-22.87	Peak	
2	146.4000	33.99	-12.02	21.97	43.50	-21.53	Peak	
3	310.3299	32.48	-10.96	21.52	46.00	-24.48	Peak	
4	539.2500	32.15	-6.75	25.40	46.00	-20.60	Peak	
5	694.4500	30.78	-3.77	27.01	46.00	-18.99	Peak	
6 *	952.4700	29.79	0.43	30.22	46.00	-15.78	Peak	

Test Mode: UNII-3/TX A Mode 5745 MHz

Vertical


80 dBuV/m

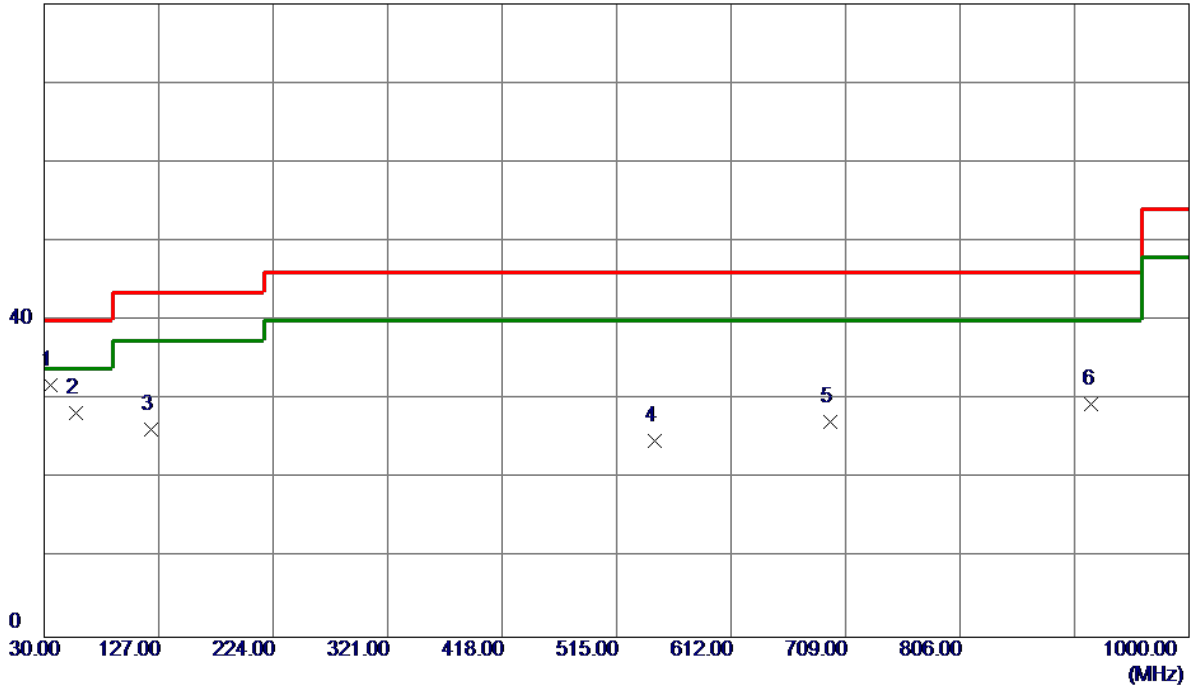

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	35.8200	46.95	-15.16	31.79	40.00	-8.21	Peak	
2	57.1600	43.71	-15.46	28.25	40.00	-11.75	Peak	
3	120.2100	41.16	-14.95	26.21	43.50	-17.29	Peak	
4	547.0100	31.12	-6.28	24.84	46.00	-21.16	Peak	
5	696.3900	30.90	-3.68	27.22	46.00	-18.78	Peak	
6	917.5500	30.27	-0.79	29.48	46.00	-16.52	Peak	

Test Mode: UNII-3/TX A Mode 5745 MHz


Horizontal

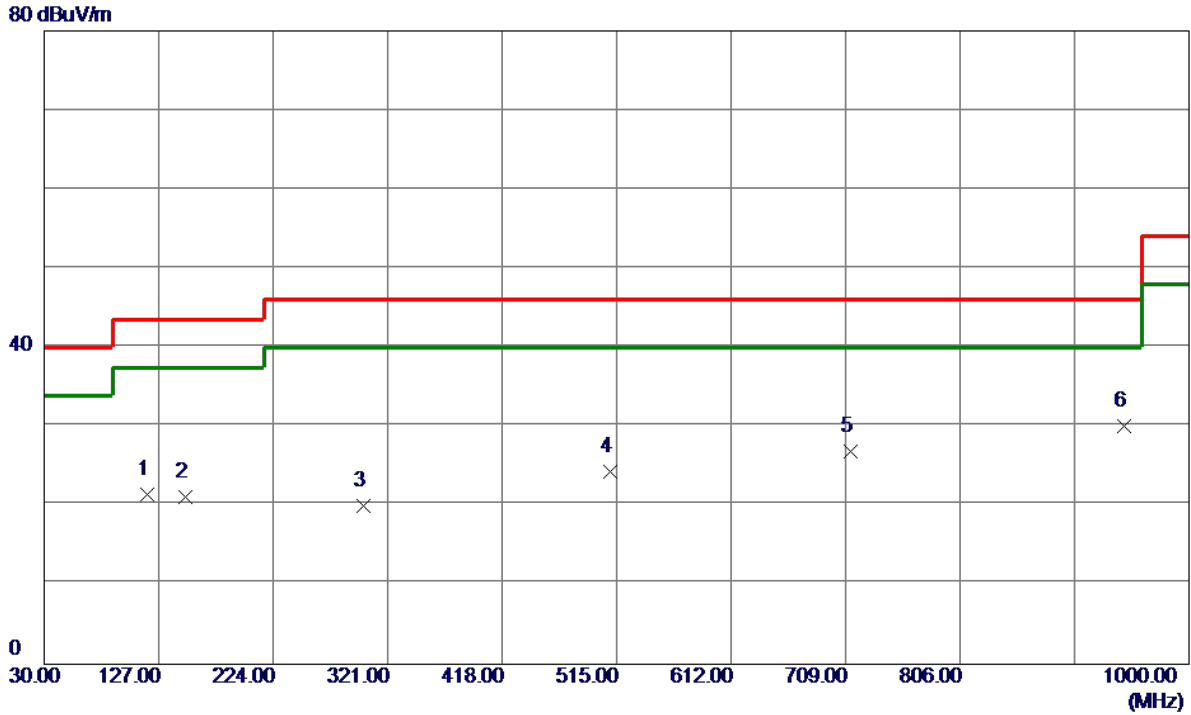

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	117.3000	36.85	-15.40	21.45	43.50	-22.05	Peak	
2	149.3100	33.03	-11.85	21.18	43.50	-22.32	Peak	
3	300.6300	30.88	-10.82	20.06	46.00	-25.94	Peak	
4	509.1800	32.89	-8.57	24.32	46.00	-21.68	Peak	
5	712.8800	30.69	-3.84	26.85	46.00	-19.15	Peak	
6 *	944.7100	29.73	0.28	30.01	46.00	-15.99	Peak	

Test Mode: UNII-3/TX A Mode 5785 MHz


Vertical

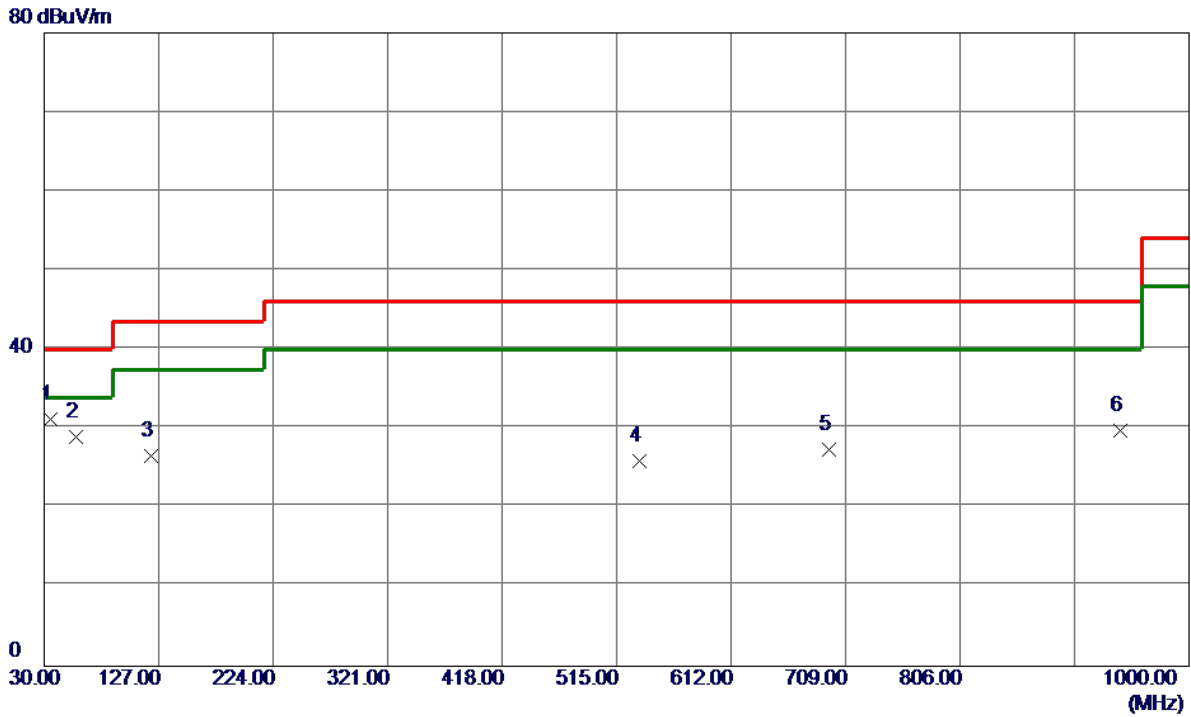

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	35.8200	46.29	-15.16	31.13	40.00	-8.87	Peak	
2	57.1600	44.42	-15.46	28.96	40.00	-11.04	Peak	
3	120.2100	41.48	-14.95	26.53	43.50	-16.97	Peak	
4	534.4000	33.03	-7.04	25.99	46.00	-20.01	Peak	
5	694.4500	31.12	-3.77	27.35	46.00	-18.65	Peak	
6	941.8000	29.56	0.17	29.73	46.00	-16.27	Peak	

Test Mode: UNII-3/TX A Mode 5785 MHz


Horizontal

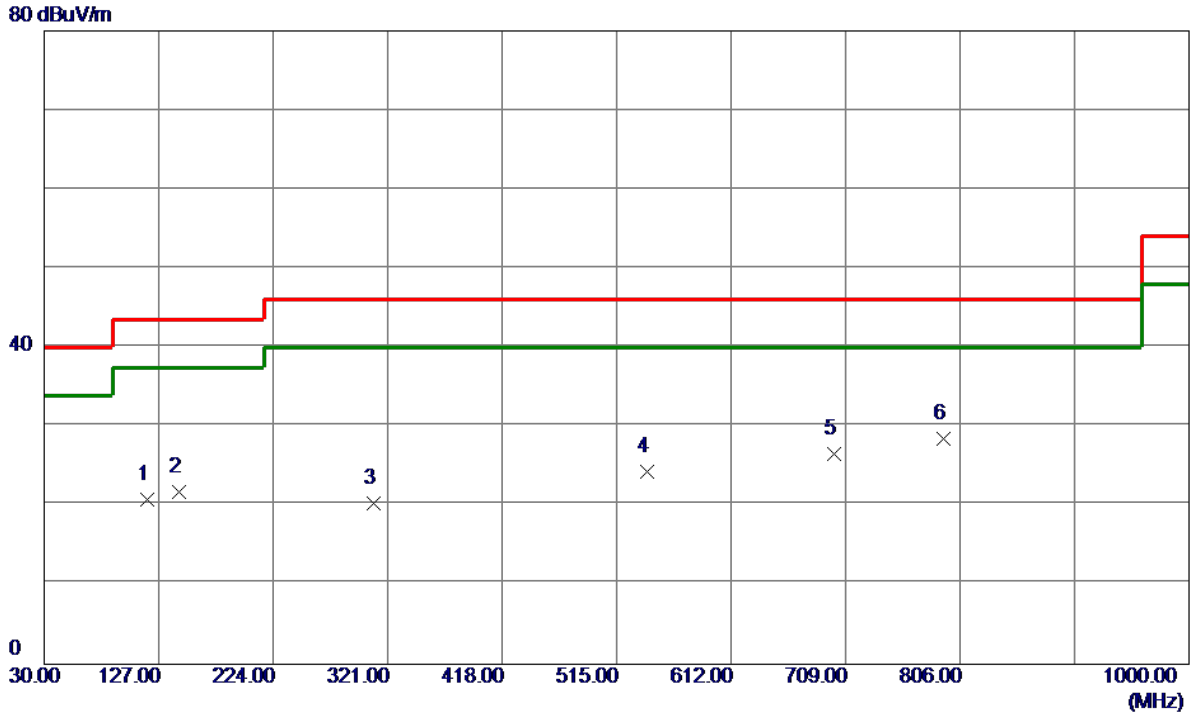

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	117.3000	36.26	-15.40	20.86	43.50	-22.64	Peak	
2	144.4600	33.90	-12.14	21.76	43.50	-21.74	Peak	
3	309.3599	31.23	-10.95	20.28	46.00	-25.72	Peak	
4	541.1900	31.01	-6.63	24.38	46.00	-21.62	Peak	
5	699.3000	30.11	-3.54	26.57	46.00	-19.43	Peak	
6 *	792.4200	30.80	-2.28	28.52	46.00	-17.48	Peak	

Test Mode: UNII-3/TX A Mode 5825 MHz


Vertical

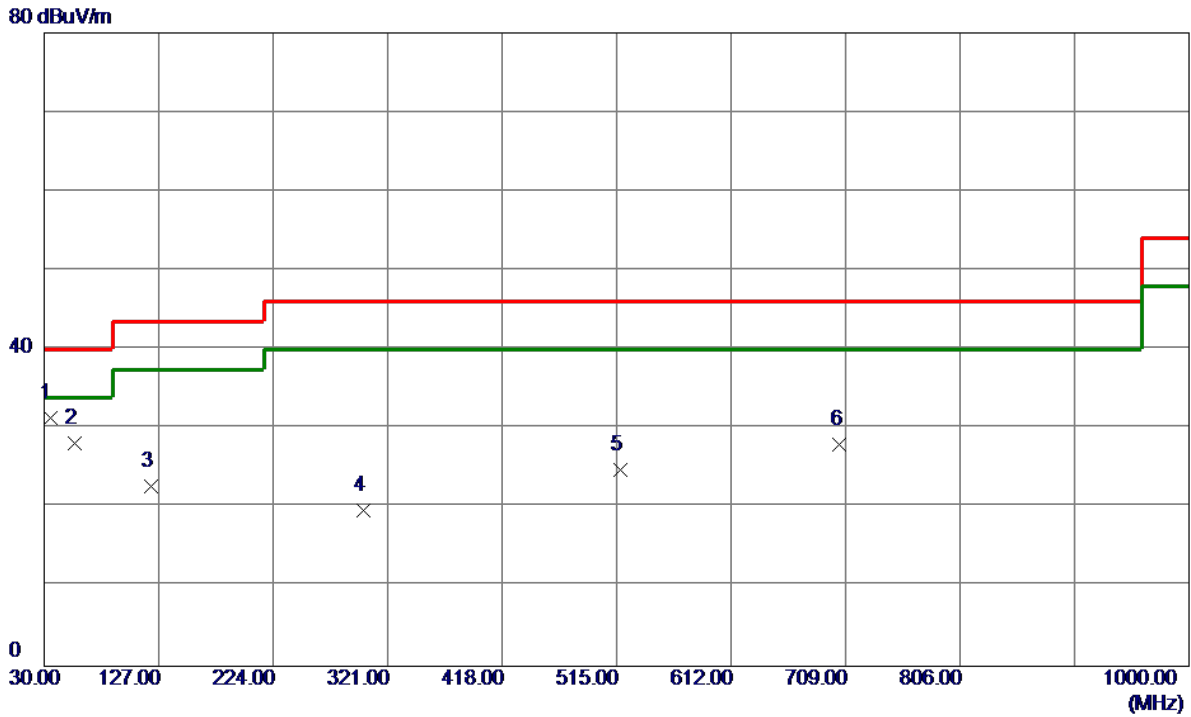

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	34.8500	46.47	-15.08	31.39	40.00	-8.61	Peak	
2	56.1900	43.47	-15.28	28.19	40.00	-11.81	Peak	
3	120.2100	37.62	-14.95	22.67	43.50	-20.83	Peak	
4	300.6300	30.52	-10.82	19.70	46.00	-26.30	Peak	
5	517.9099	32.81	-8.04	24.77	46.00	-21.23	Peak	
6	704.1500	31.66	-3.61	28.05	46.00	-17.95	Peak	

Test Mode: UNII-3/TX A Mode 5825 MHz

Horizontal

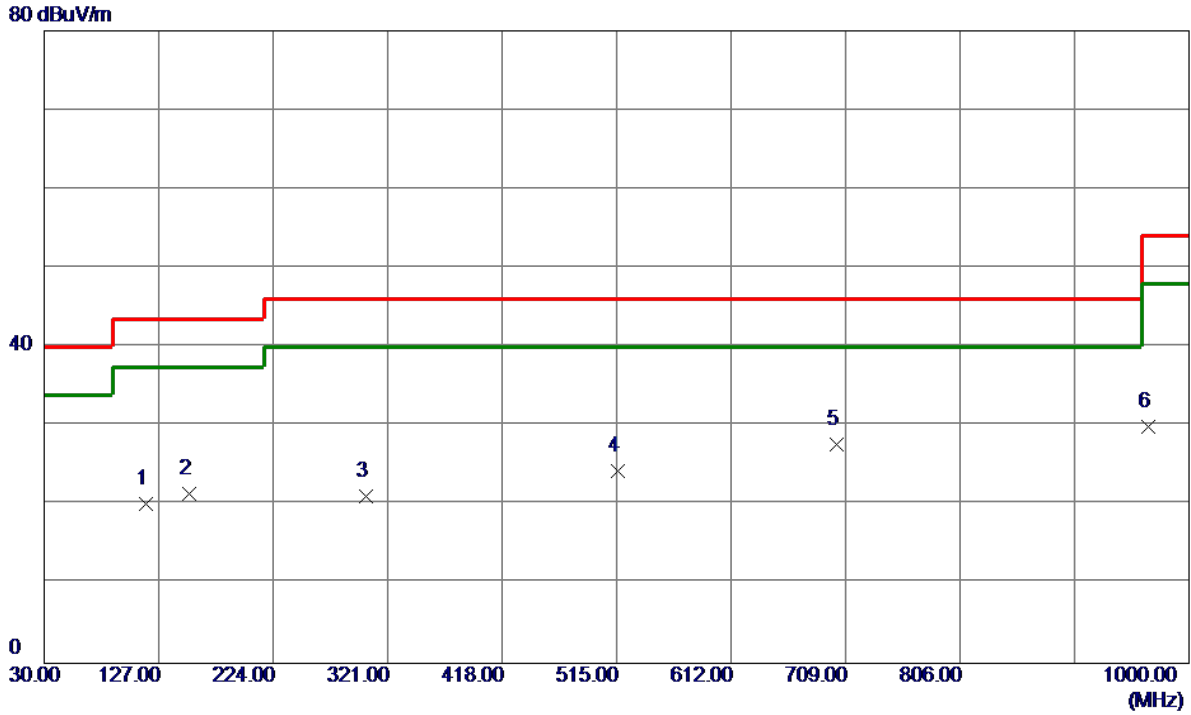


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	116.3300	35.73	-15.56	20.17	43.50	-23.33	Peak	
2	153.1900	33.01	-11.53	21.48	43.50	-22.02	Peak	
3	302.5700	31.95	-10.85	21.10	46.00	-24.90	Peak	
4	515.9699	32.41	-8.16	24.25	46.00	-21.75	Peak	
5 *	701.2400	31.19	-3.54	27.65	46.00	-18.35	Peak	
6	965.0800	29.86	0.13	29.99	54.00	-24.01	Peak	

APPENDIX D - RADIATED EMISSION (ABOVE 1000 MHZ)

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180 MHz

Vertical


130 dBuV/m

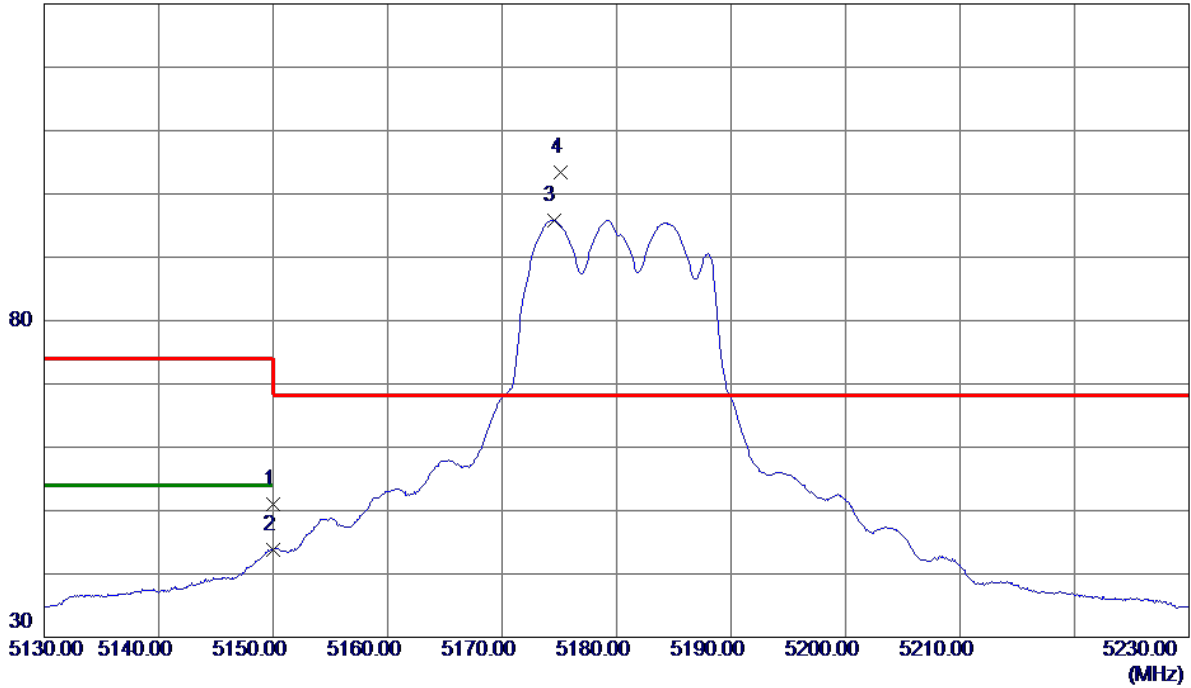

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	41.63	9.31	50.94	74.00	-23.06	Peak	
2	5150.0000	34.48	9.31	43.79	54.00	-10.21	AVG	
3	5174.5000	86.40	9.37	95.77	999.00	-903.23	AVG	No Limit
4 *	5175.1000	94.05	9.37	103.42	68.30	35.12	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180 MHz

Vertical

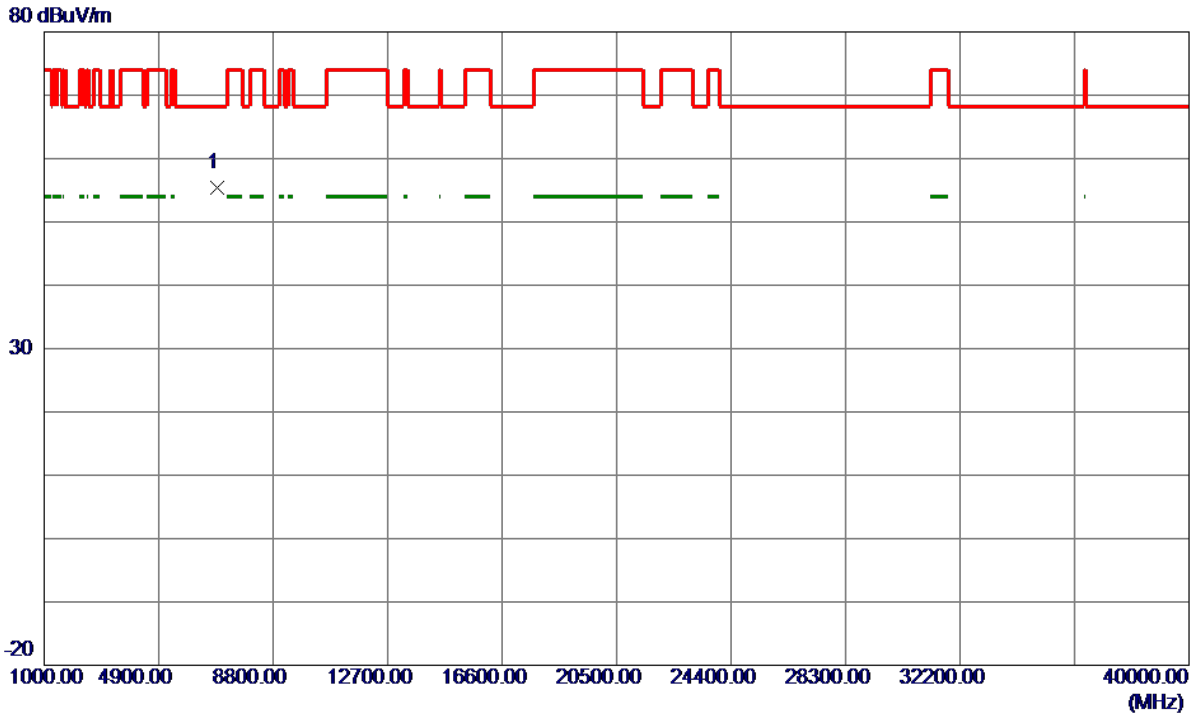


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6906.5960	44.47	11.02	55.49	68.30	-12.81	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180 MHz

Horizontal


130 dBuV/m

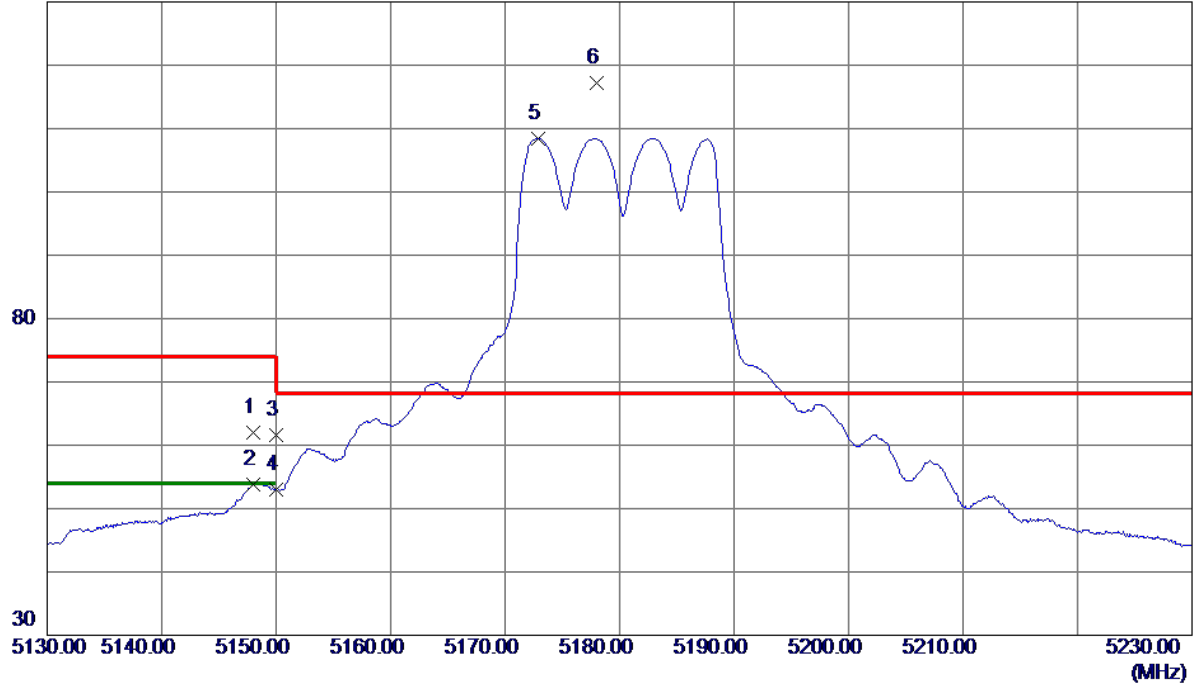

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5148.0500	47.78	14.31	62.09	74.00	-11.91	Peak	
2	5148.0500	39.58	14.31	53.89	54.00	-0.11	AVG	
3	5150.0000	47.31	14.32	61.63	74.00	-12.37	Peak	
4	5150.0000	38.65	14.32	52.97	54.00	-1.03	AVG	
5	5172.8500	94.10	14.38	108.48	999.00	-890.52	AVG	No Limit
6 *	5177.9500	102.79	14.39	117.18	68.30	48.88	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180 MHz

Horizontal

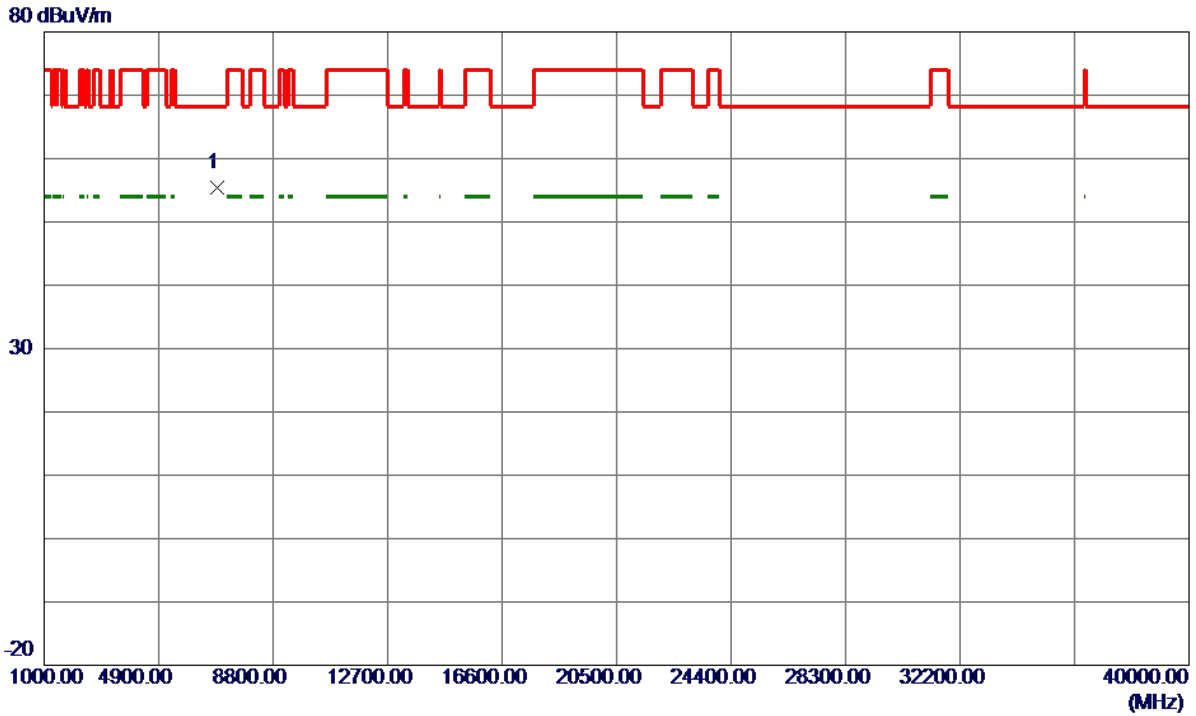

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6906.7350	44.41	11.02	55.43	68.30	-12.87	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5200 MHz

Vertical


130 dBuV/m



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5201.4000	85.88	9.42	95.30	999.00	-903.70	AVG	No Limit
2 *	5207.0000	93.90	9.43	103.33	68.30	35.03	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5200 MHz

Vertical

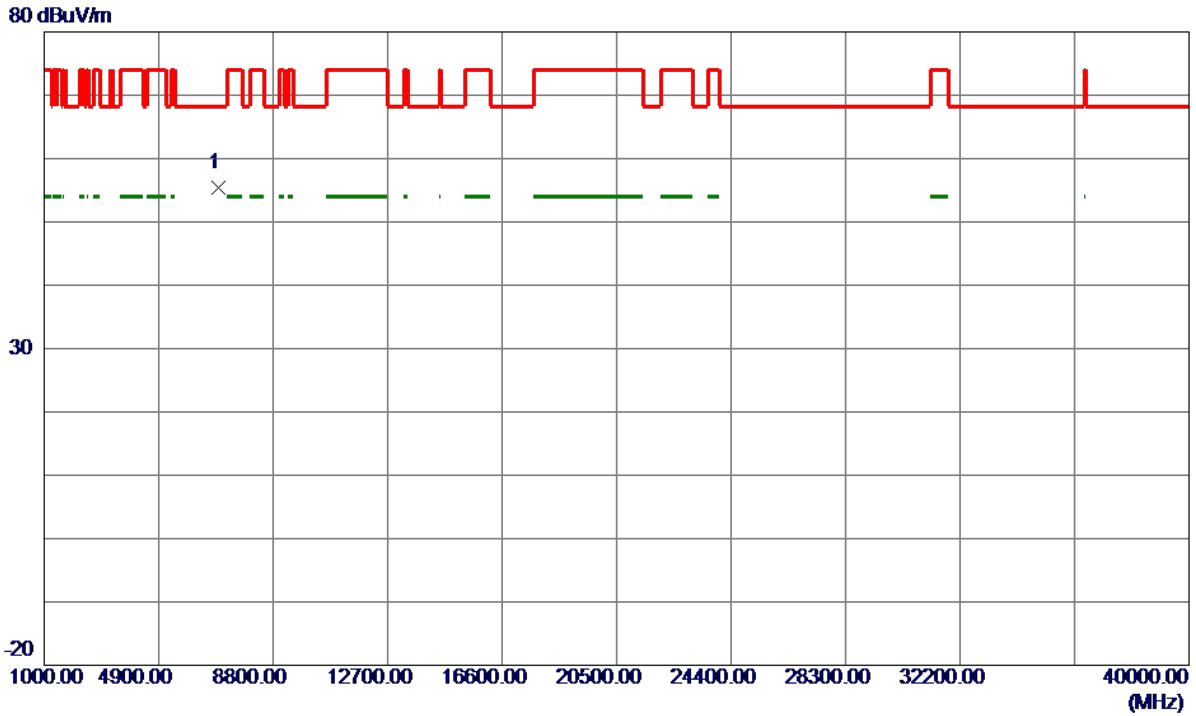


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6933.3320	44.35	11.08	55.43	68.30	-12.87	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5200 MHz

Horizontal


130 dBuV/m

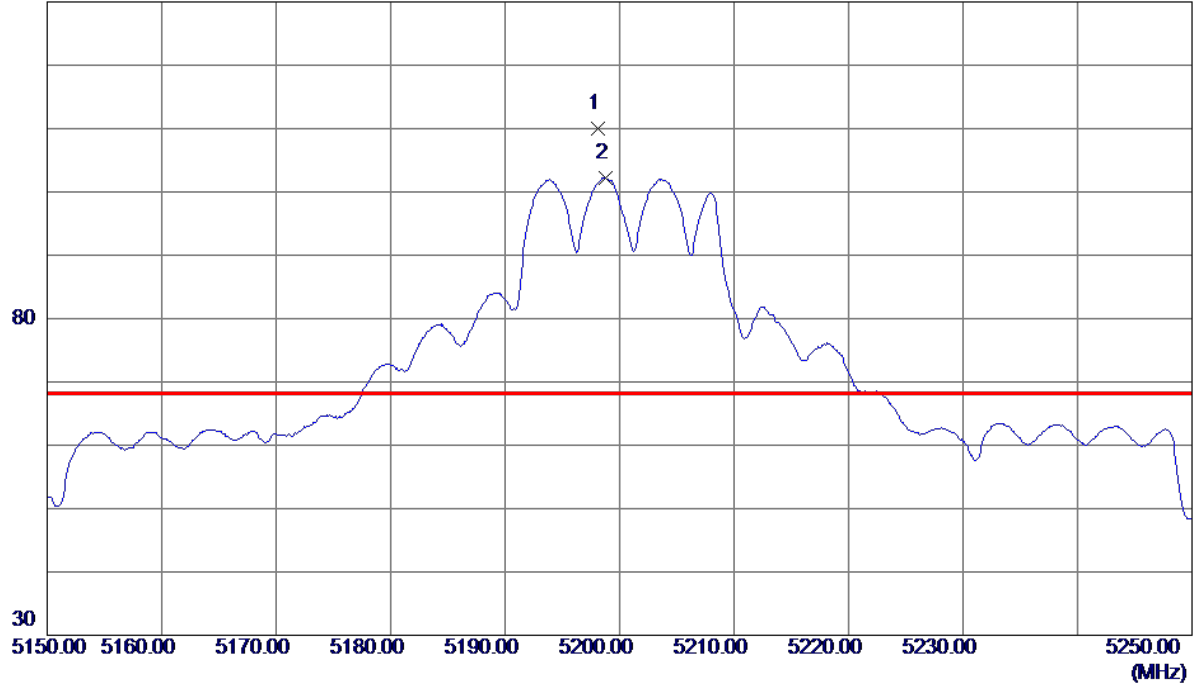

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5198.1000	100.68	9.42	110.10	68.30	41.80	Peak	No Limit
2	5198.8000	92.79	9.42	102.21	999.00	-896.79	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5200 MHz

Horizontal

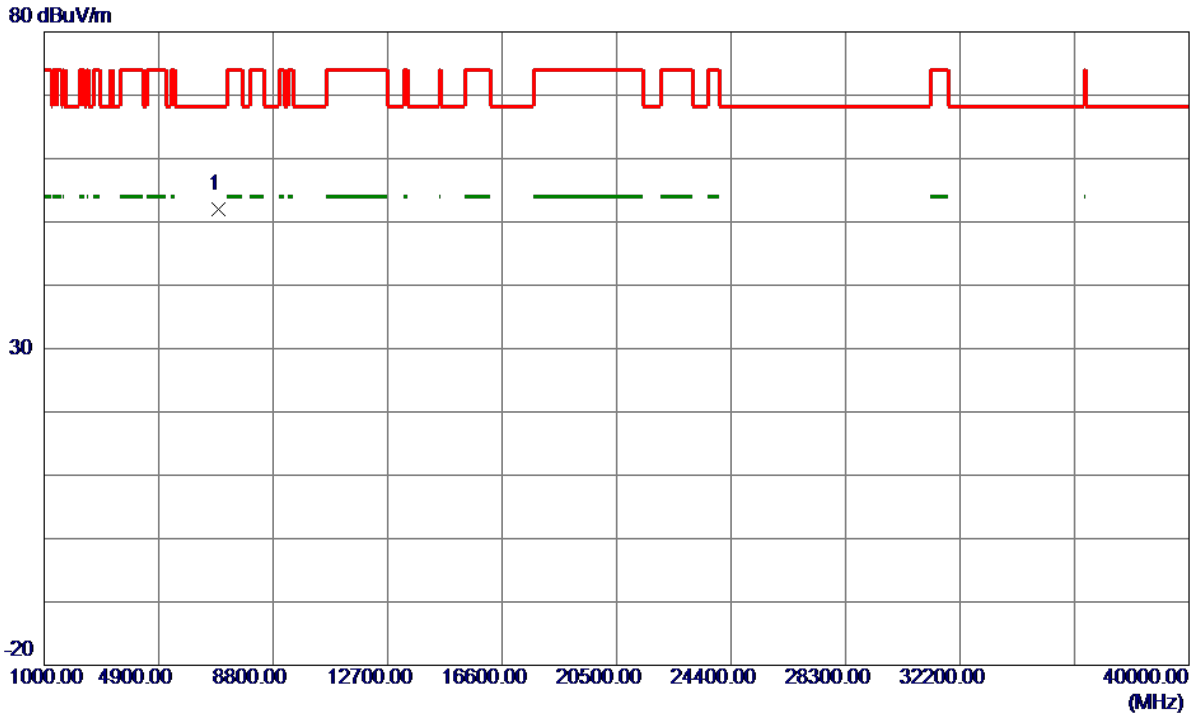


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6933.4090	40.97	11.08	52.05	68.30	-16.25	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240 MHz

Vertical


130 dBuV/m

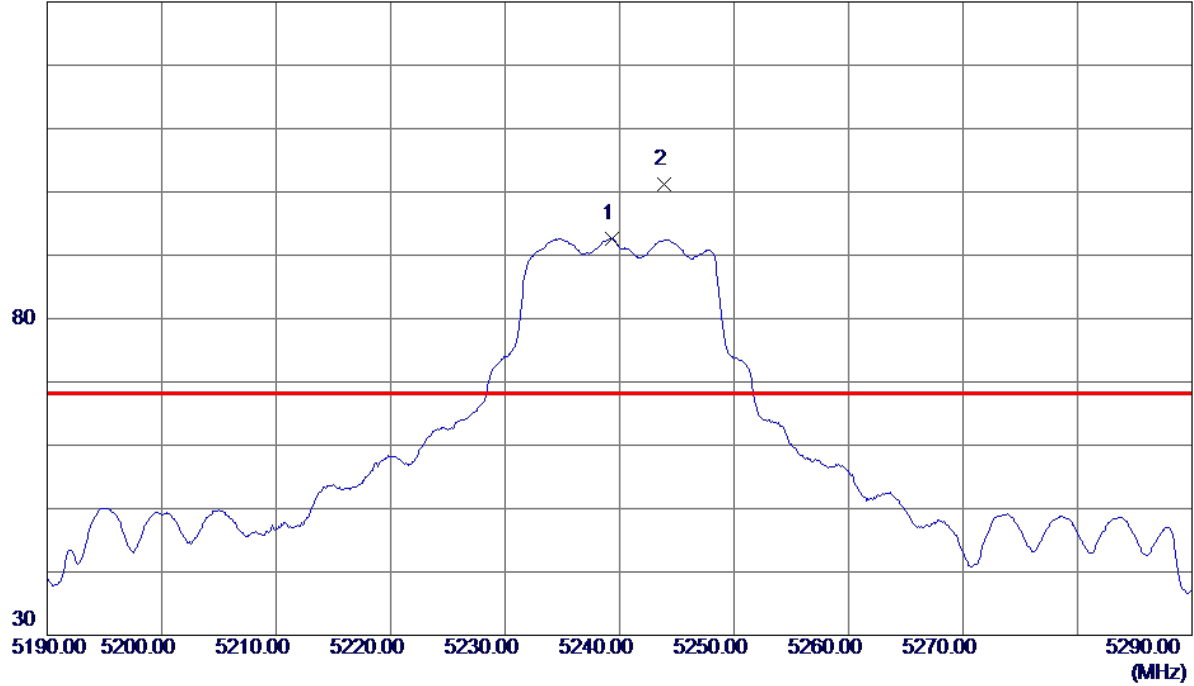

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5239.3000	83.10	9.50	92.60	999.00	-906.40	AVG	No Limit
2 *	5243.9000	91.77	9.51	101.28	68.30	32.98	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240 MHz

Vertical

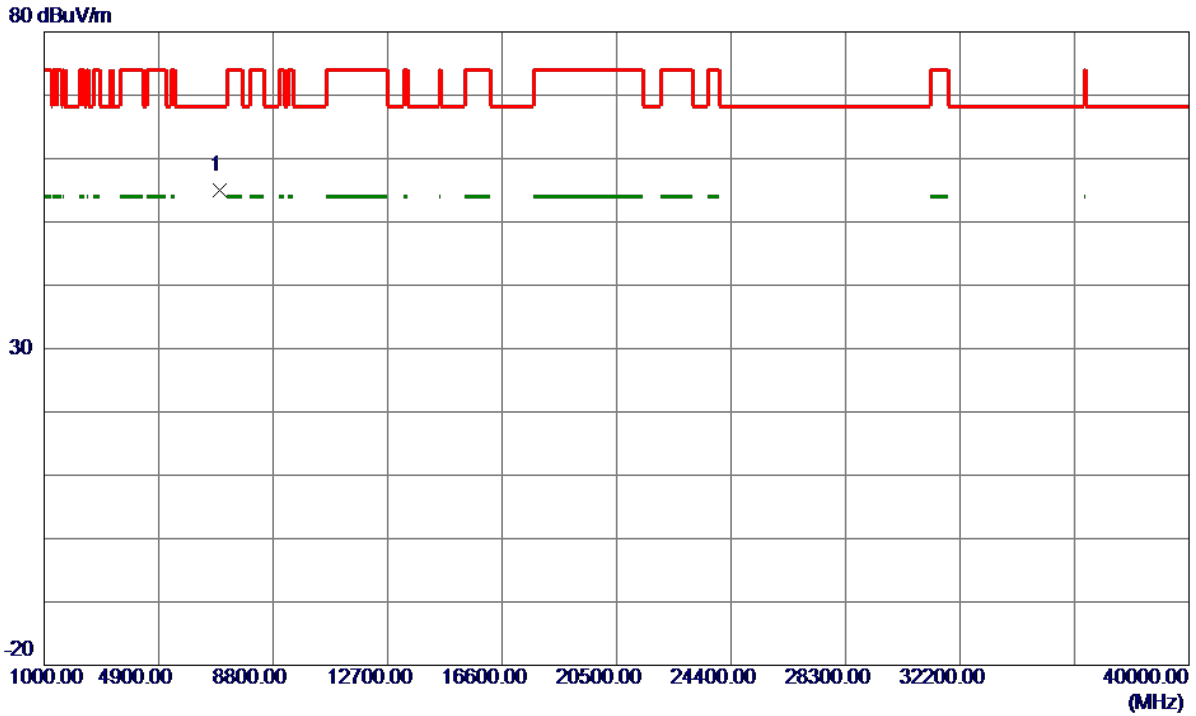


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6986.5620	43.90	11.19	55.09	68.30	-13.21	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240 MHz

Horizontal


130 dBuV/m

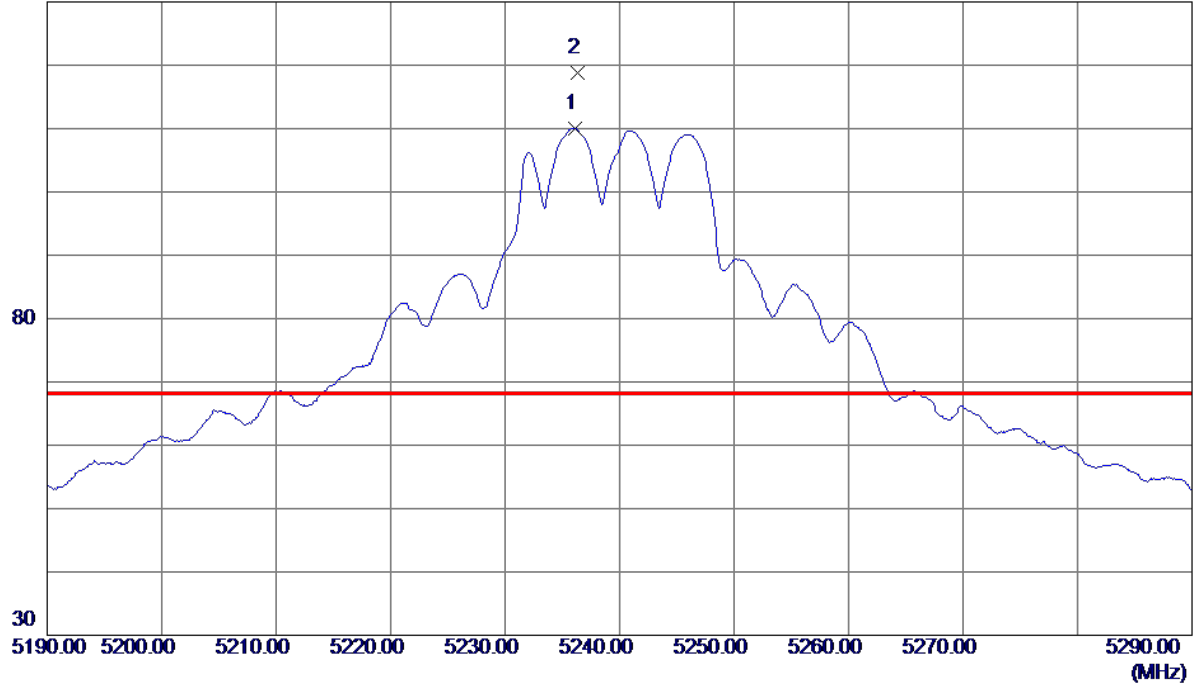

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5236.1000	88.22	21.85	110.07	999.00	-888.93	AVG	No Limit
2 *	5236.3000	96.90	21.85	118.75	68.30	50.45	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240 MHz

Horizontal

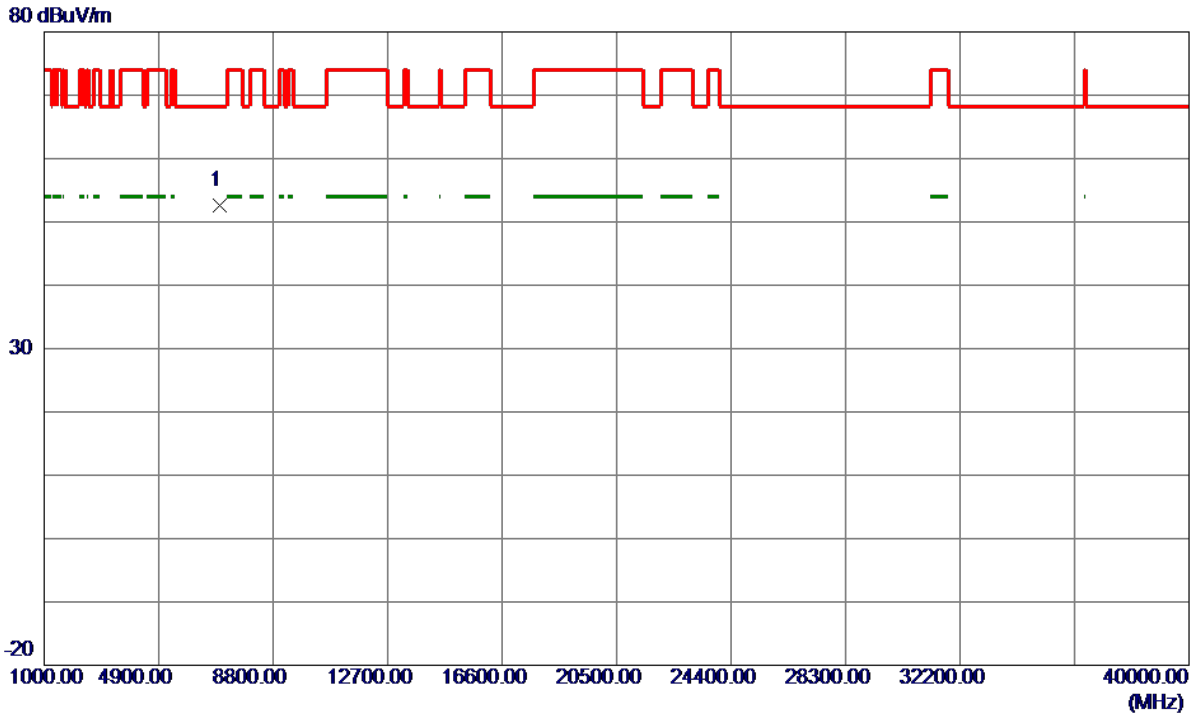


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6986.7250	41.42	11.19	52.61	68.30	-15.69	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180 MHz

Vertical


130 dBuV/m

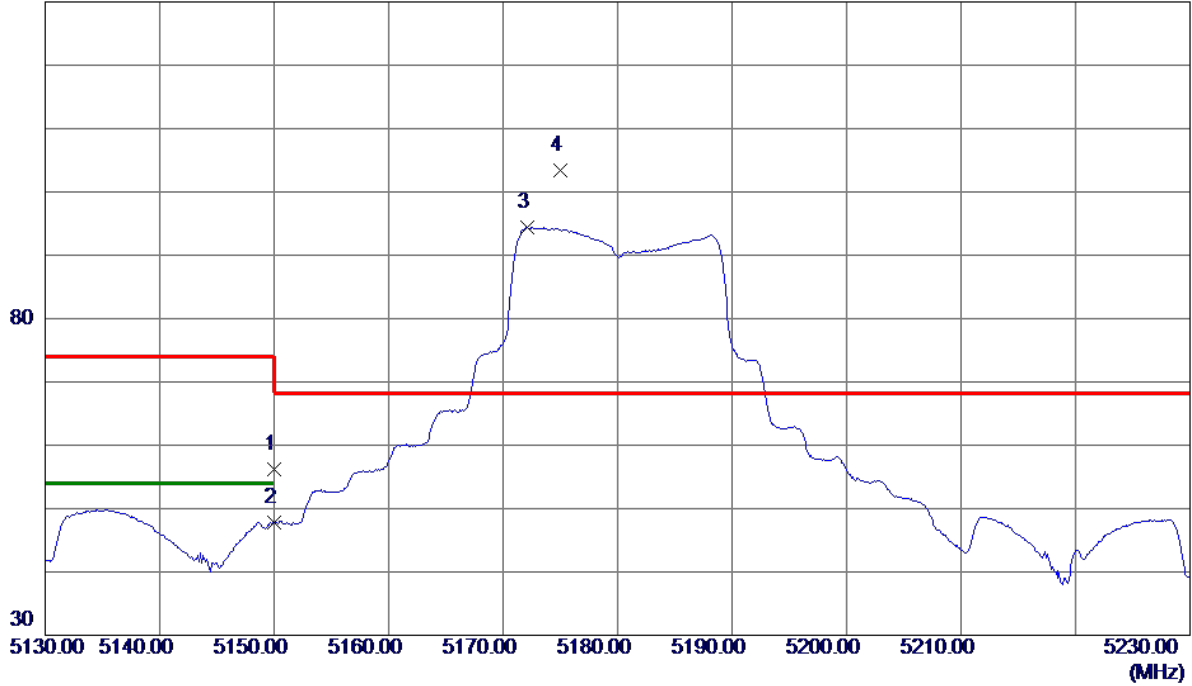

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	46.81	9.31	56.12	74.00	-17.88	Peak	
2	5150.0000	38.56	9.31	47.87	54.00	-6.13	AVG	
3	5172.1000	85.03	9.36	94.39	999.00	-904.61	AVG	No Limit
4 *	5175.0000	94.12	9.37	103.49	68.30	35.19	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180 MHz

Vertical

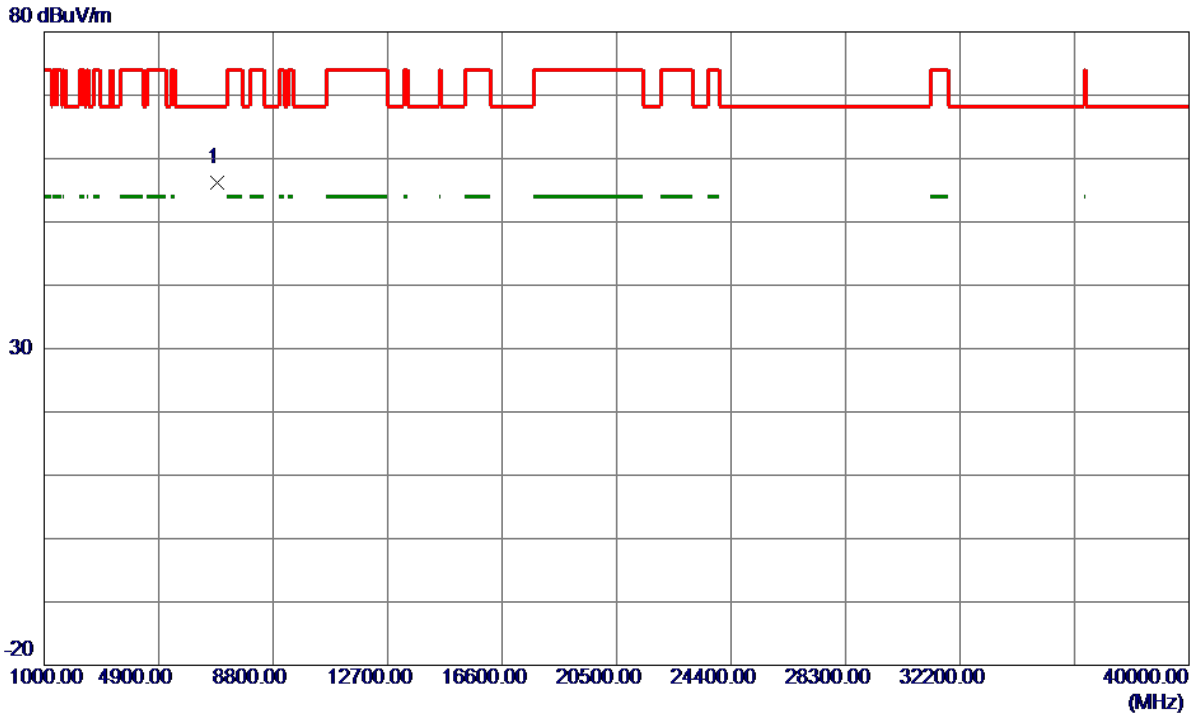


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6906.7260	45.25	11.02	56.27	68.30	-12.03	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180 MHz

Horizontal


130 dBuV/m

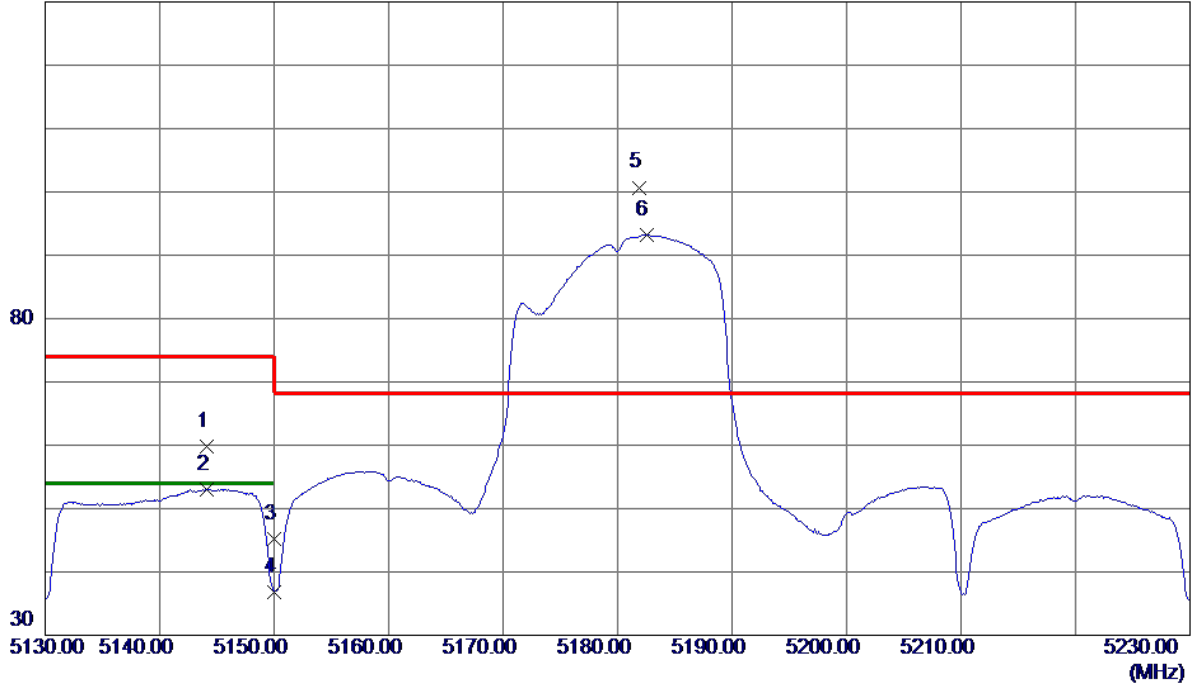

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5144.1000	50.45	9.30	59.75	74.00	-14.25	Peak	
2	5144.1000	43.79	9.30	53.09	54.00	-0.91	AVG	
3	5150.0000	35.86	9.31	45.17	74.00	-28.83	Peak	
4	5150.0000	27.55	9.31	36.86	54.00	-17.14	AVG	
5 *	5181.9000	91.32	9.38	100.70	68.30	32.40	Peak	No Limit
6	5182.5000	83.87	9.38	93.25	999.00	-905.75	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180 MHz

Horizontal

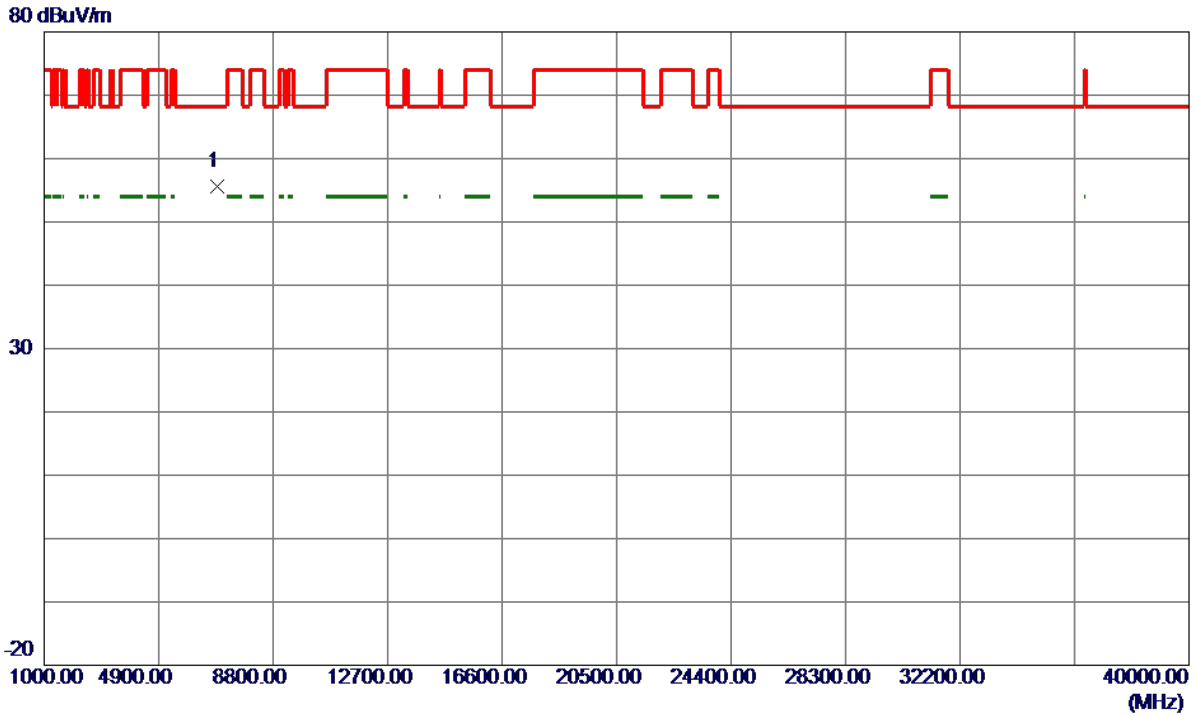

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6906.7420	44.61	11.02	55.63	68.30	-12.67	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5200 MHz

Vertical


130 dBuV/m



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5205.3000	94.21	9.43	103.64	68.30	35.34	Peak	No Limit
2	5208.1000	86.06	9.44	95.50	999.00	-903.50	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5200 MHz

Vertical

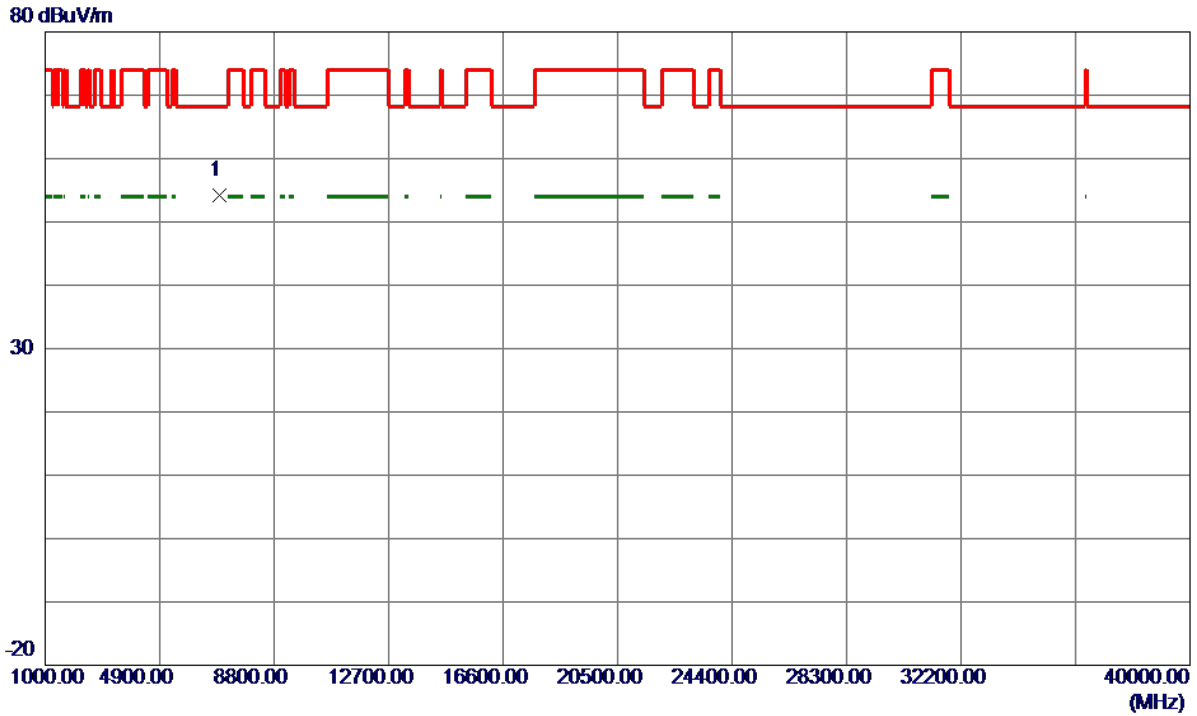


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6933.4520	43.08	11.08	54.16	68.30	-14.14	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5200 MHz

Horizontal


130 dBuV/m

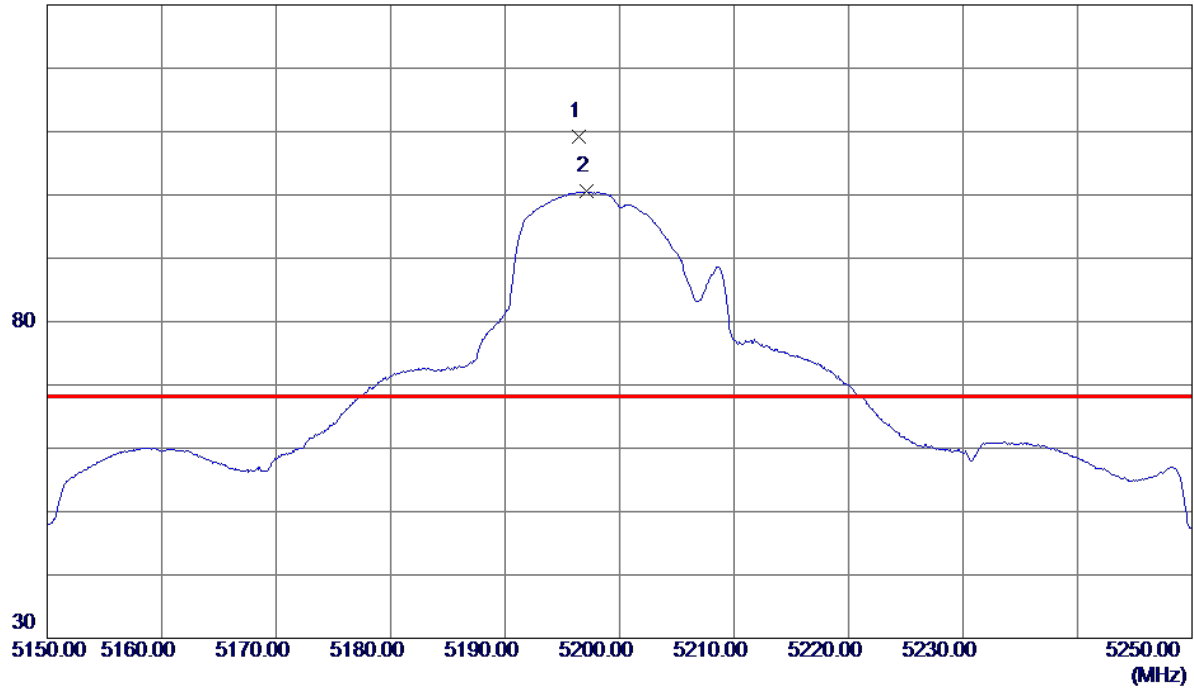

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5196.4000	99.73	9.41	109.14	68.30	40.84	Peak	No Limit
2	5197.1000	91.10	9.41	100.51	999.00	-898.49	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5200 MHz

Horizontal

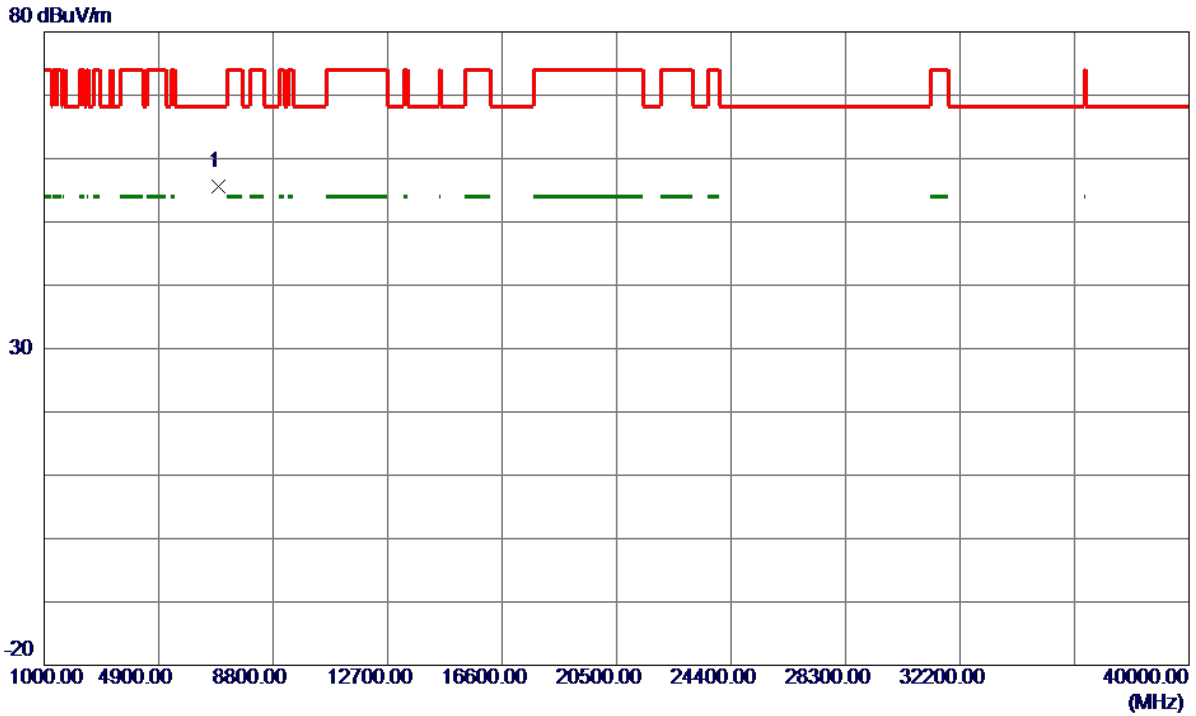


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6933.4900	44.56	11.08	55.64	68.30	-12.66	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240 MHz

Vertical


130 dBuV/m

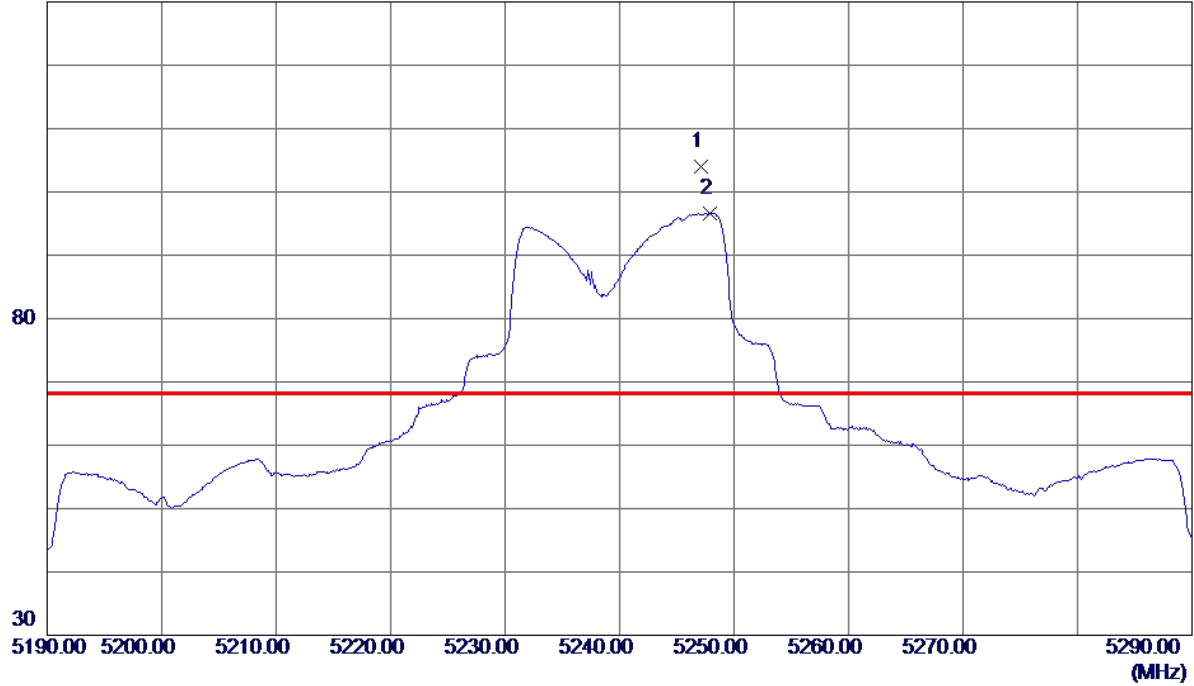

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5247.1000	94.57	9.52	104.09	68.30	35.79	Peak	No Limit
2	5247.9000	87.15	9.52	96.67	999.00	-902.33	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240 MHz

Vertical

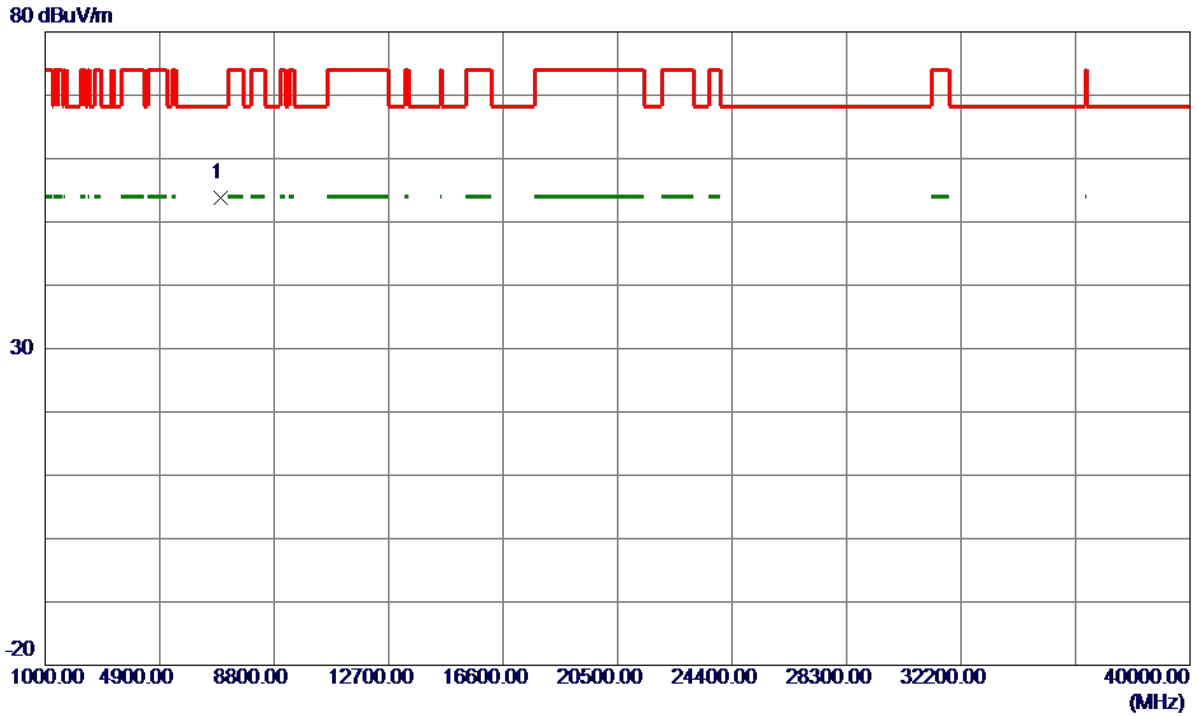


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6986.7020	42.52	11.19	53.71	68.30	-14.59	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240 MHz

Horizontal


130 dBuV/m

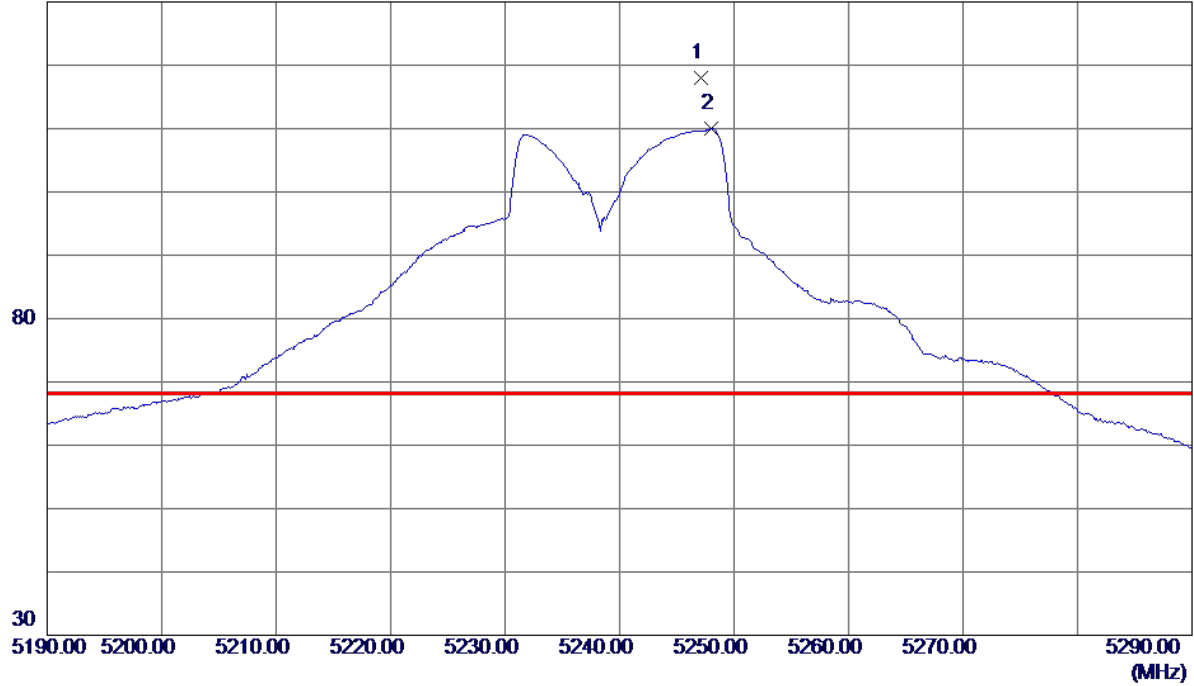

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5247.1000	96.19	21.87	118.06	68.30	49.76	Peak	No Limit
2	5248.0000	88.15	21.87	110.02	999.00	-888.98	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240 MHz

Horizontal

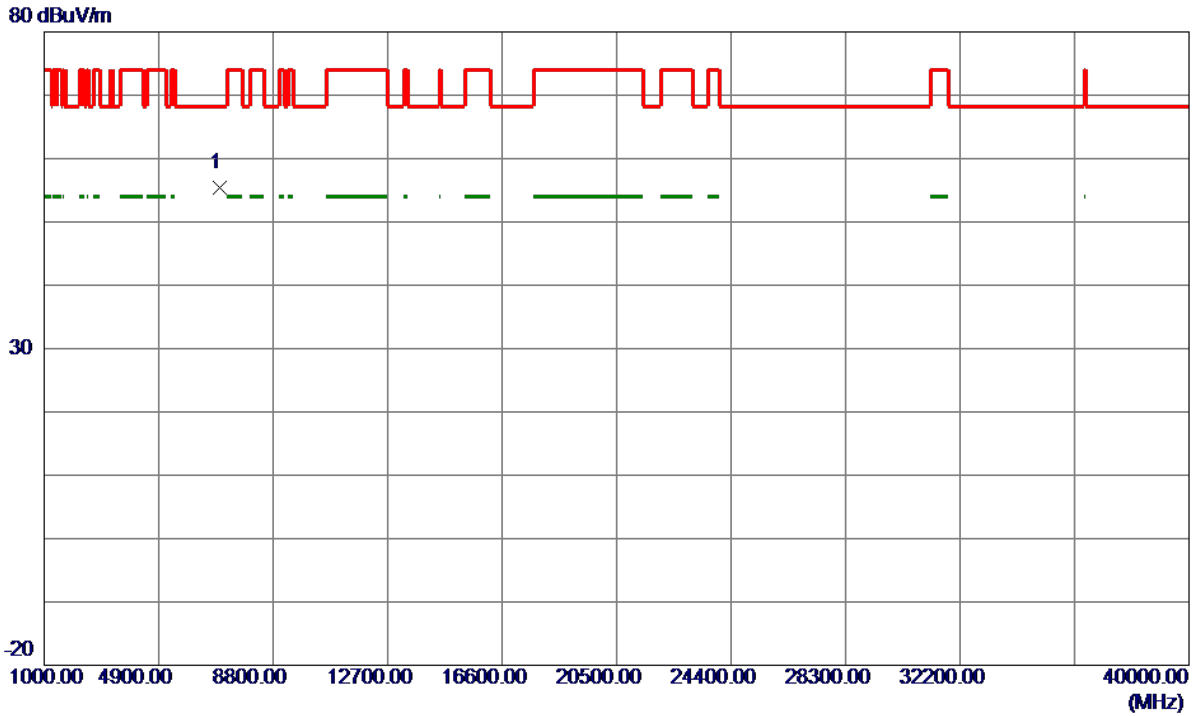


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6986.7320	44.17	11.19	55.36	68.30	-12.94	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Vertical


130 dBuV/m

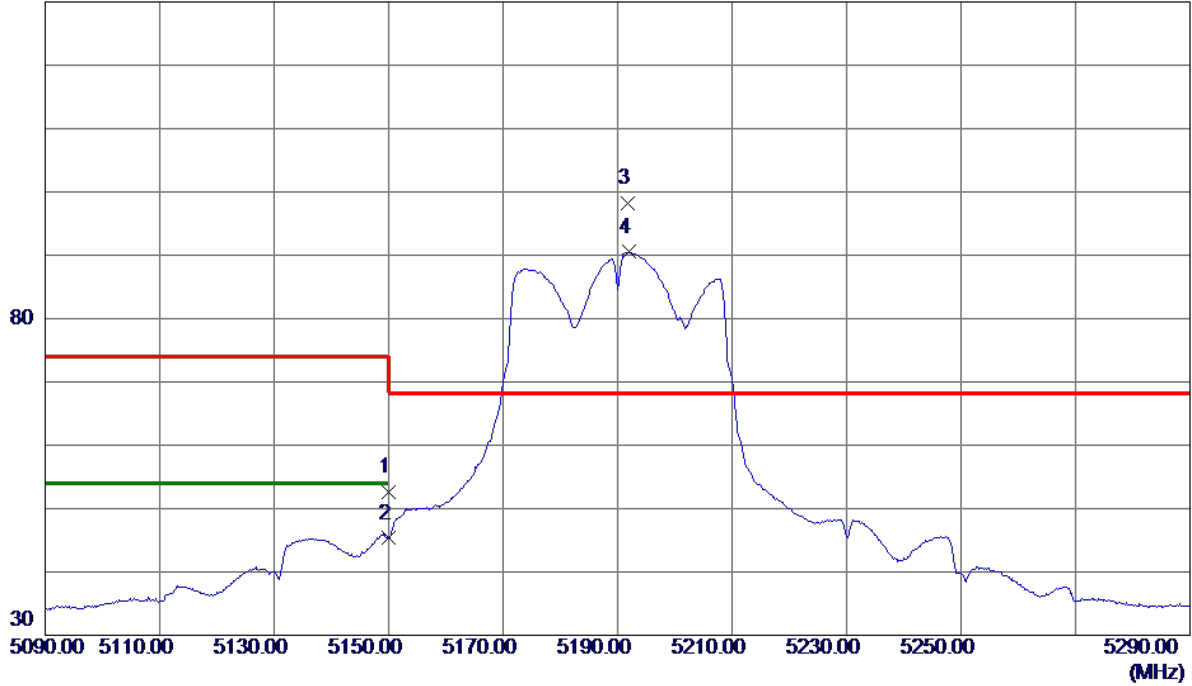

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	43.26	9.31	52.57	74.00	-21.43	Peak	
2	5150.0000	35.99	9.31	45.30	54.00	-8.70	AVG	
3 *	5191.8000	88.87	9.40	98.27	68.30	29.97	Peak	No Limit
4	5192.0000	81.10	9.40	90.50	999.00	-908.50	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Vertical

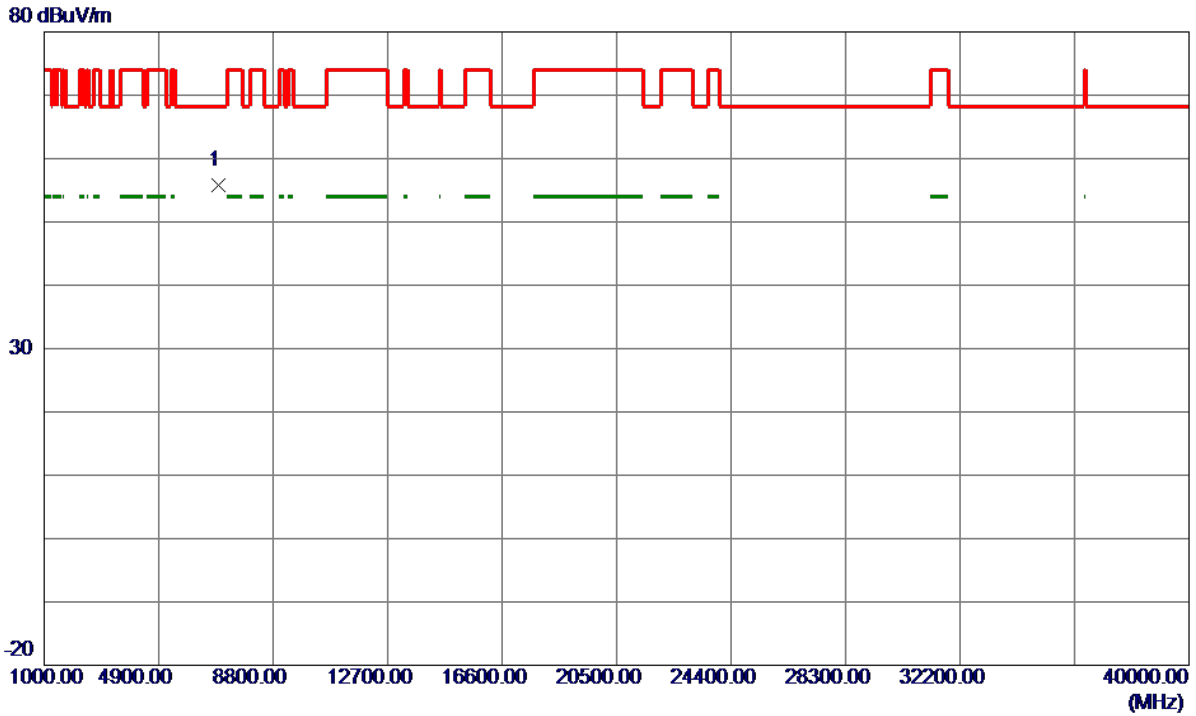


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6920.0780	44.66	11.05	55.71	68.30	-12.59	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Horizontal


130 dBuV/m

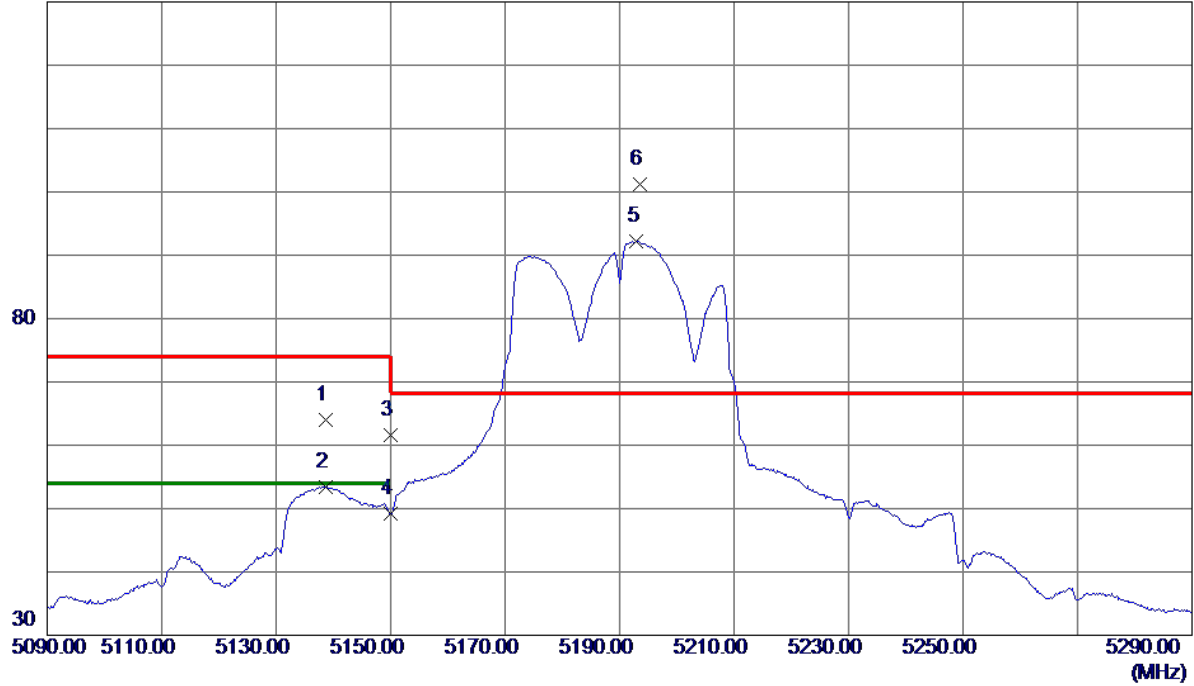

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5138.6000	54.78	9.29	64.07	74.00	-9.93	Peak	
2	5138.6000	44.18	9.29	53.47	54.00	-0.53	AVG	
3	5150.0000	52.38	9.31	61.69	74.00	-12.31	Peak	
4	5150.0000	39.91	9.31	49.22	54.00	-4.78	AVG	
5	5193.0000	82.85	9.41	92.26	999.00	-906.74	AVG	No Limit
6 *	5193.6500	91.85	9.41	101.26	68.30	32.96	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Horizontal

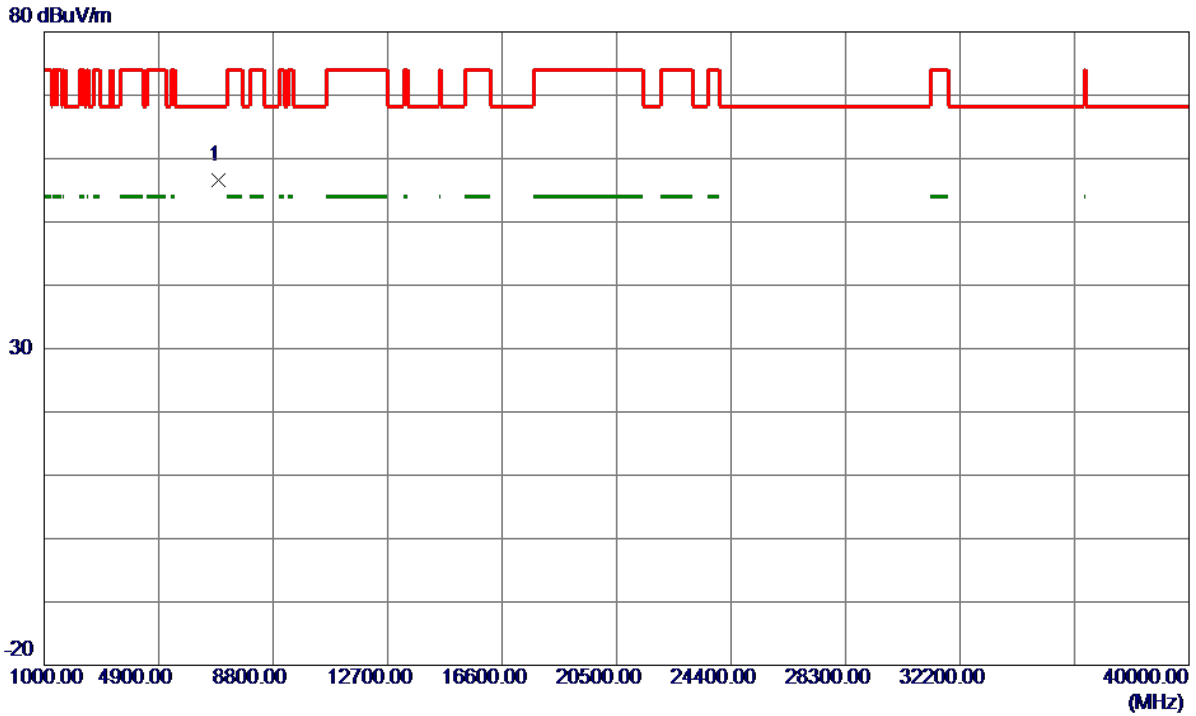

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6920.1180	45.54	11.05	56.59	68.30	-11.71	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Vertical


130 dBuV/m



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5227.2000	92.63	9.48	102.11	68.30	33.81	Peak	No Limit
2	5227.2000	84.85	9.48	94.33	999.00	-904.67	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Vertical

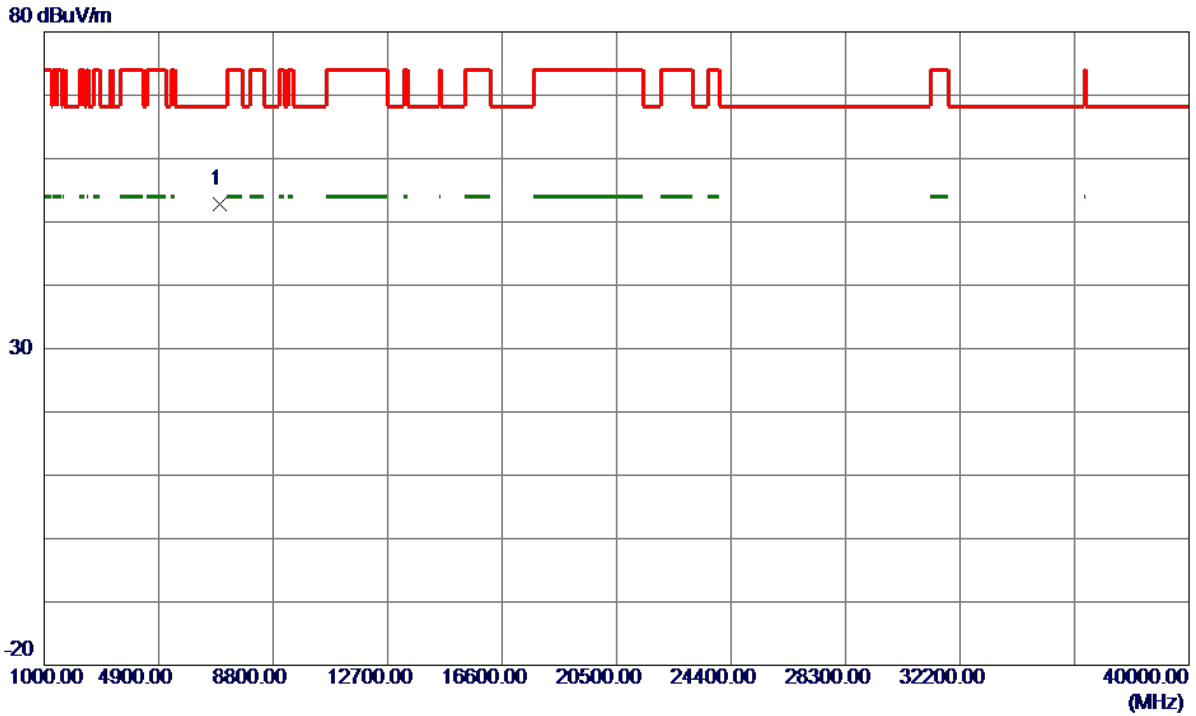


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6973.4460	41.56	11.16	52.72	68.30	-15.58	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Horizontal


130 dBuV/m

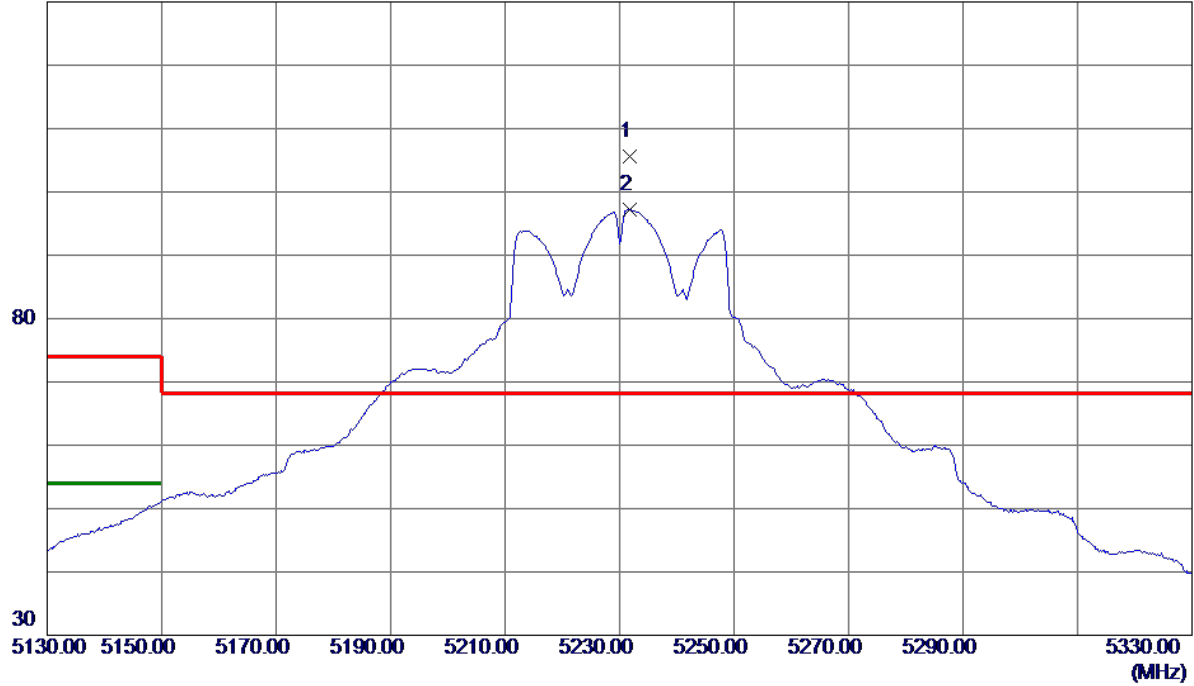

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5231.8000	96.13	9.49	105.62	68.30	37.32	Peak	No Limit
2	5231.8000	87.73	9.49	97.22	999.00	-901.78	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Horizontal

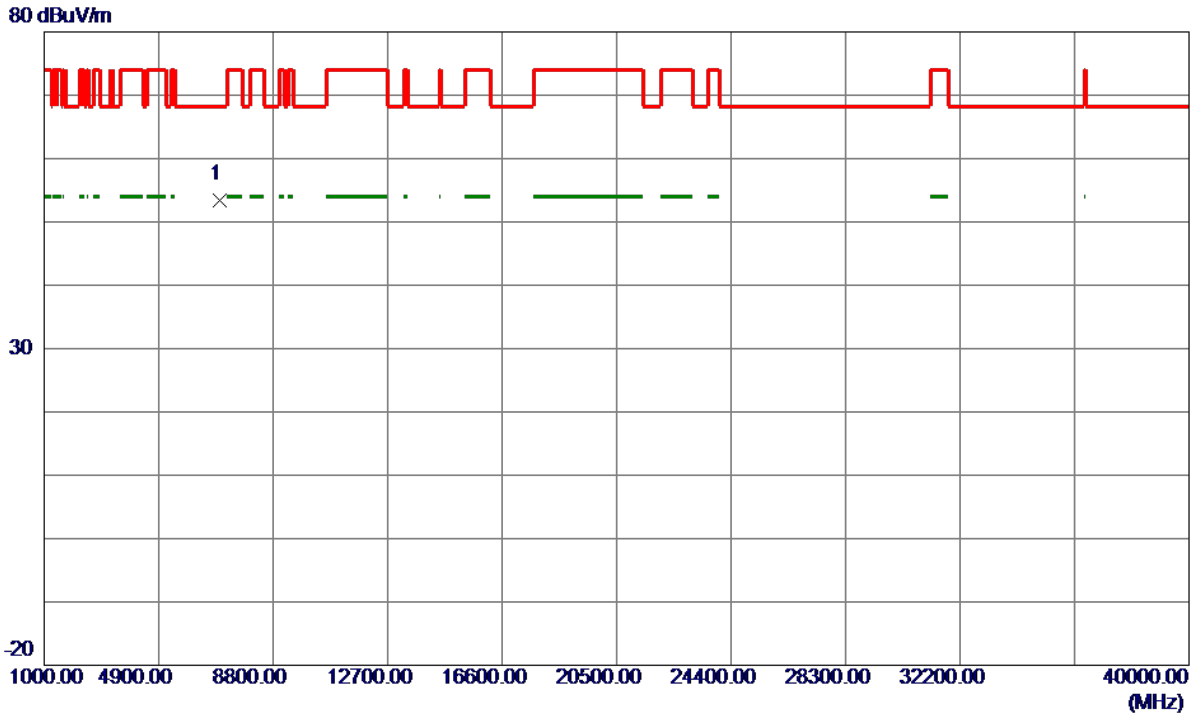


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6973.3200	42.34	11.16	53.50	68.30	-14.80	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745 MHz

Vertical


130 dBuV/m

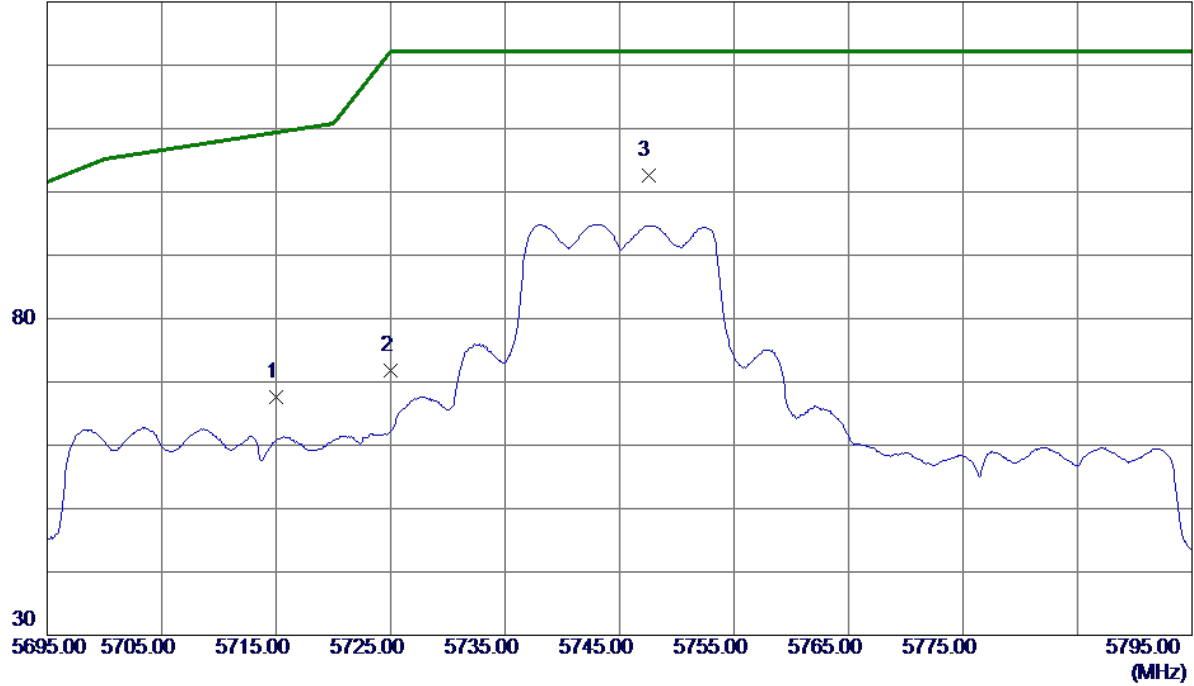

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	56.97	10.67	67.64	109.40	-41.76	Peak	
2	5725.0000	61.10	10.70	71.80	122.20	-50.40	Peak	
3 *	5747.5000	91.82	10.77	102.59	122.20	-19.61	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745 MHz

Vertical

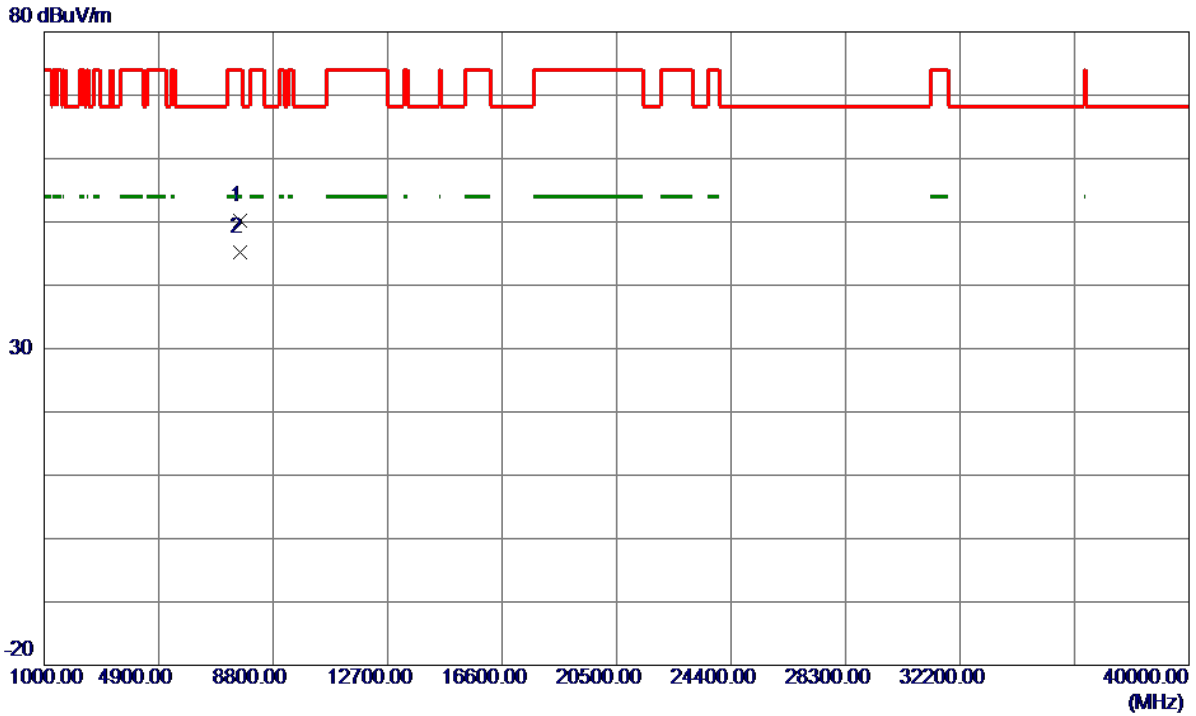


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7660.1140	37.77	12.36	50.13	74.00	-23.87	Peak	
2 *	7660.1160	32.78	12.36	45.14	54.00	-8.86	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745 MHz

Horizontal


130 dBuV/m

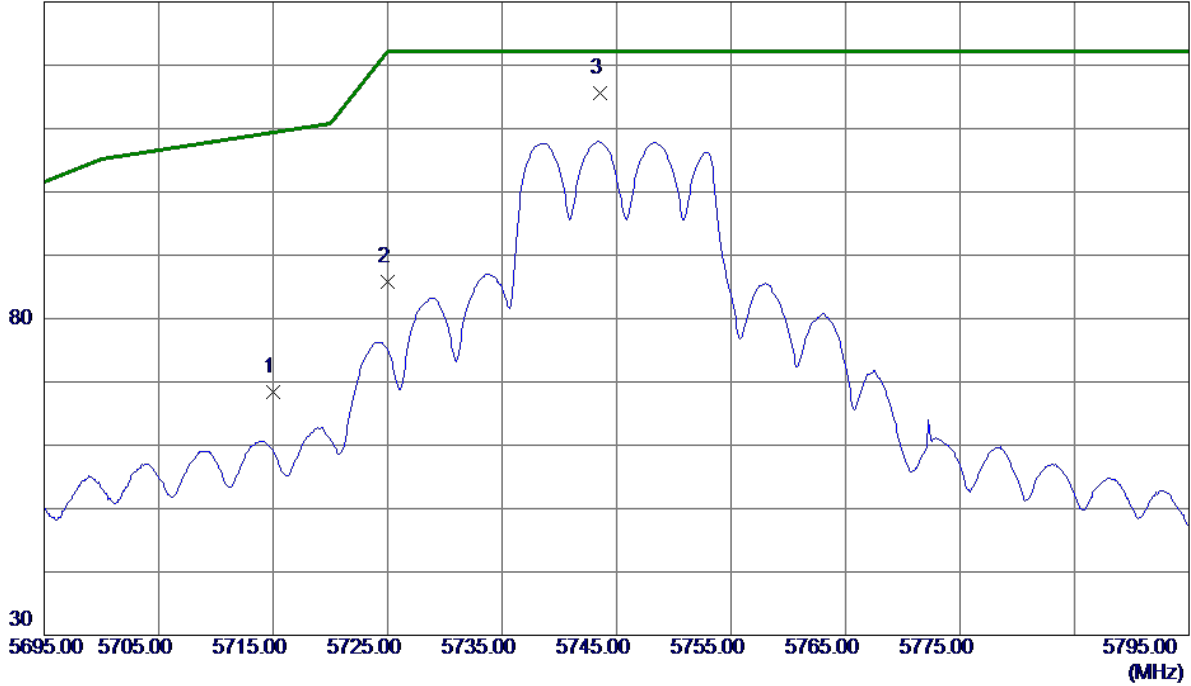

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	45.90	22.48	68.38	109.40	-41.02	Peak	
2	5725.0000	63.39	22.49	85.88	122.20	-36.32	Peak	
3 *	5743.6000	93.04	22.51	115.55	122.20	-6.65	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745 MHz

Horizontal

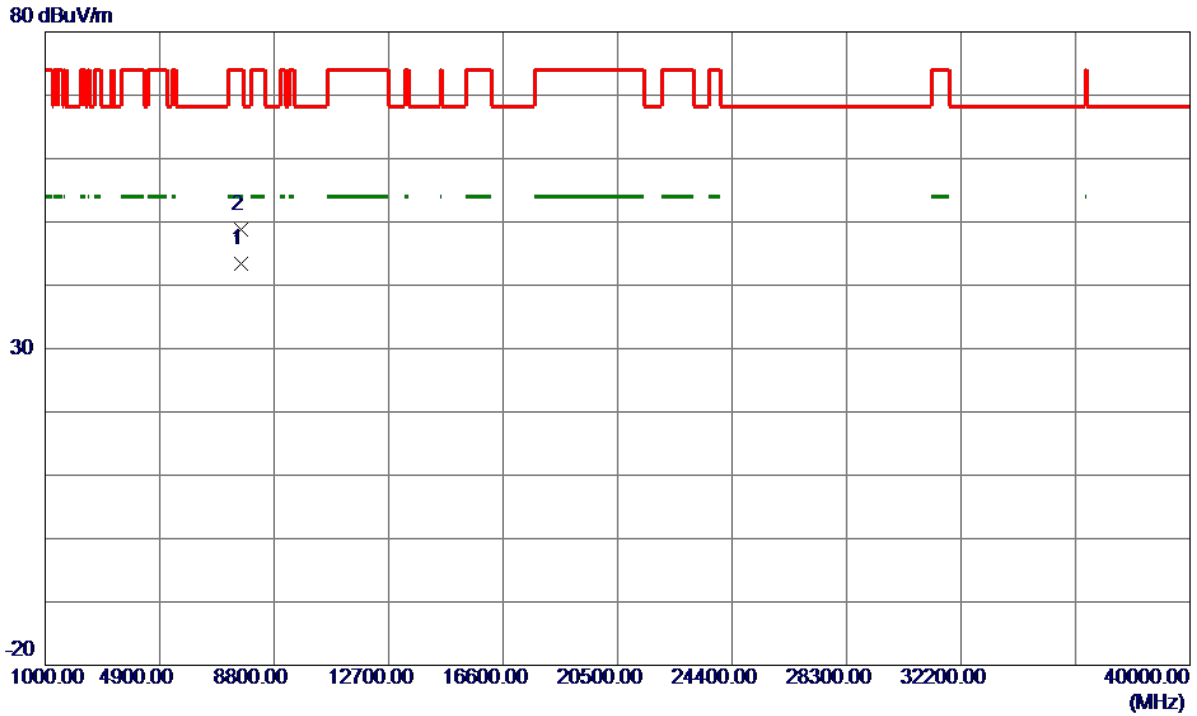


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7660.1180	31.03	12.36	43.39	54.00	-10.61	AVG	
2	7660.1380	36.52	12.36	48.88	74.00	-25.12	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785 MHz

Vertical


130 dBuV/m

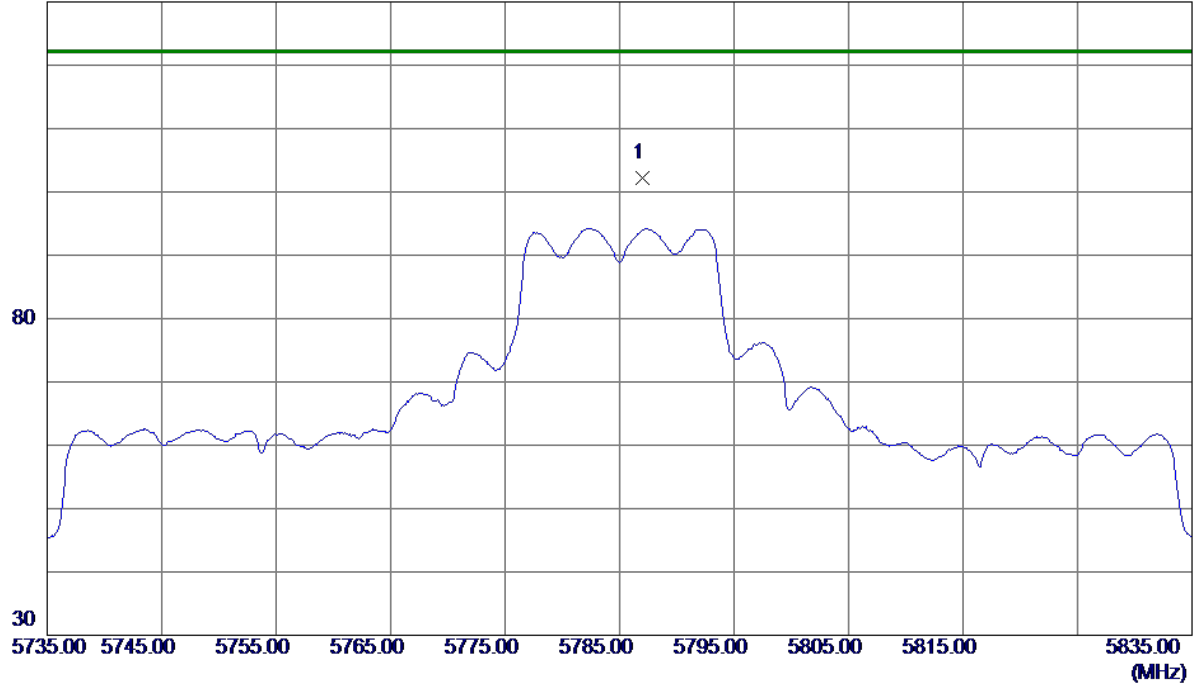

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5787.0000	91.31	10.88	102.19	122.20	-20.01	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785 MHz


Vertical

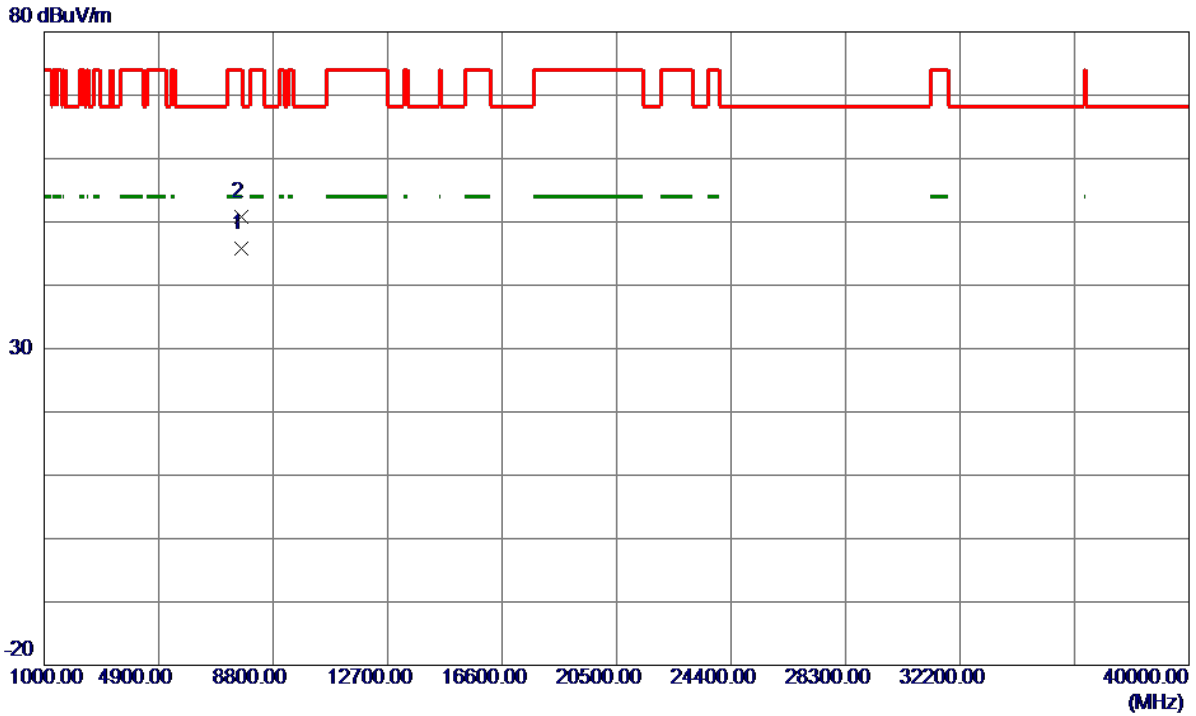

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7713.3980	33.52	12.34	45.86	54.00	-8.14	AVG	
2	7713.4720	38.41	12.34	50.75	74.00	-23.25	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785 MHz


Horizontal

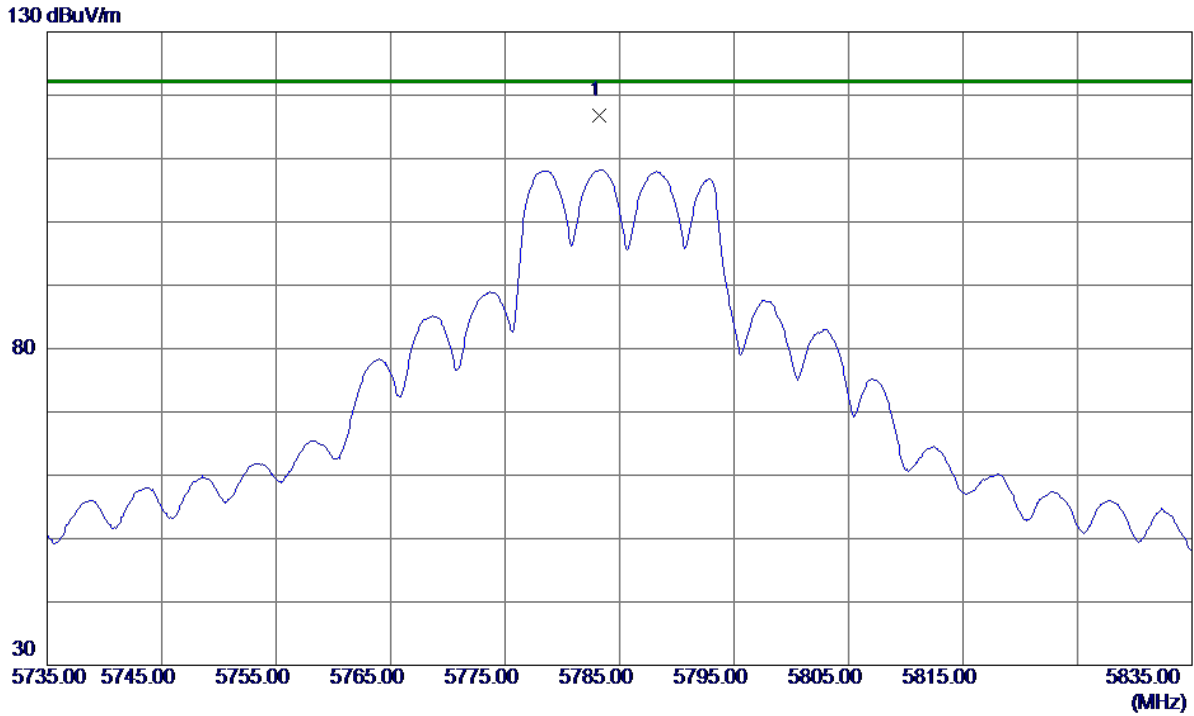

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5783.2000	94.23	22.56	116.79	122.20	-5.41	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785 MHz

Horizontal

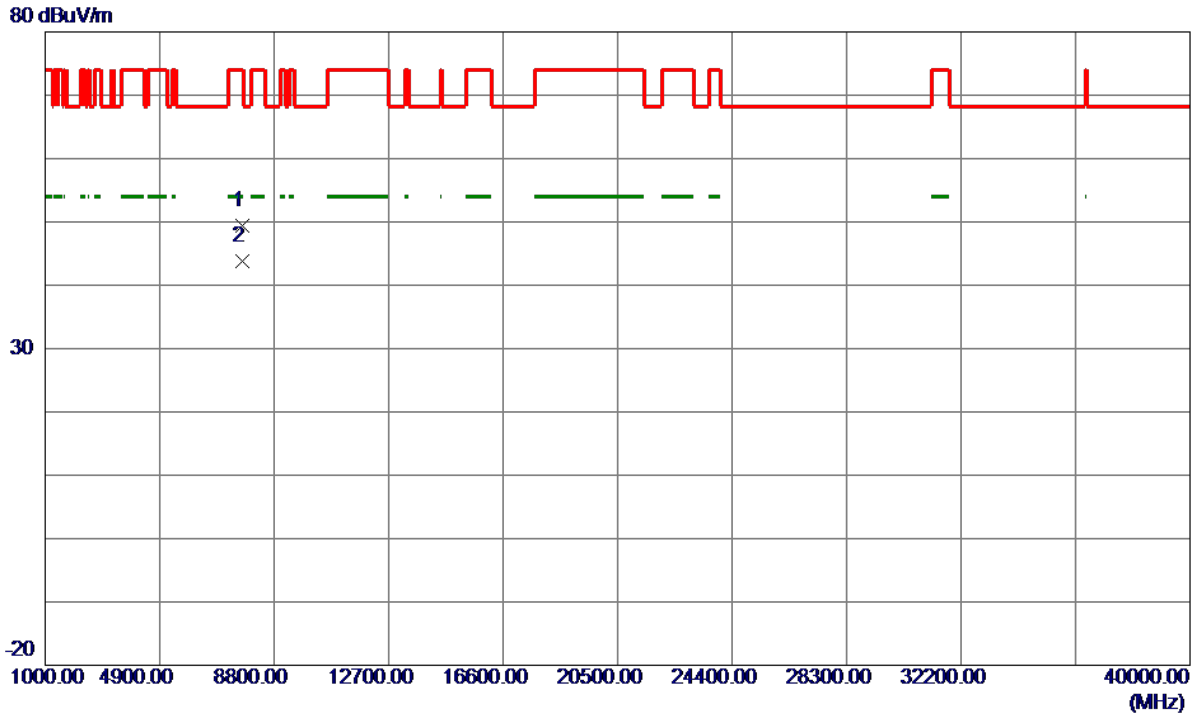


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7713.4440	37.04	12.34	49.38	74.00	-24.62	Peak	
2 *	7713.4500	31.49	12.34	43.83	54.00	-10.17	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825 MHz

Vertical


130 dBuV/m

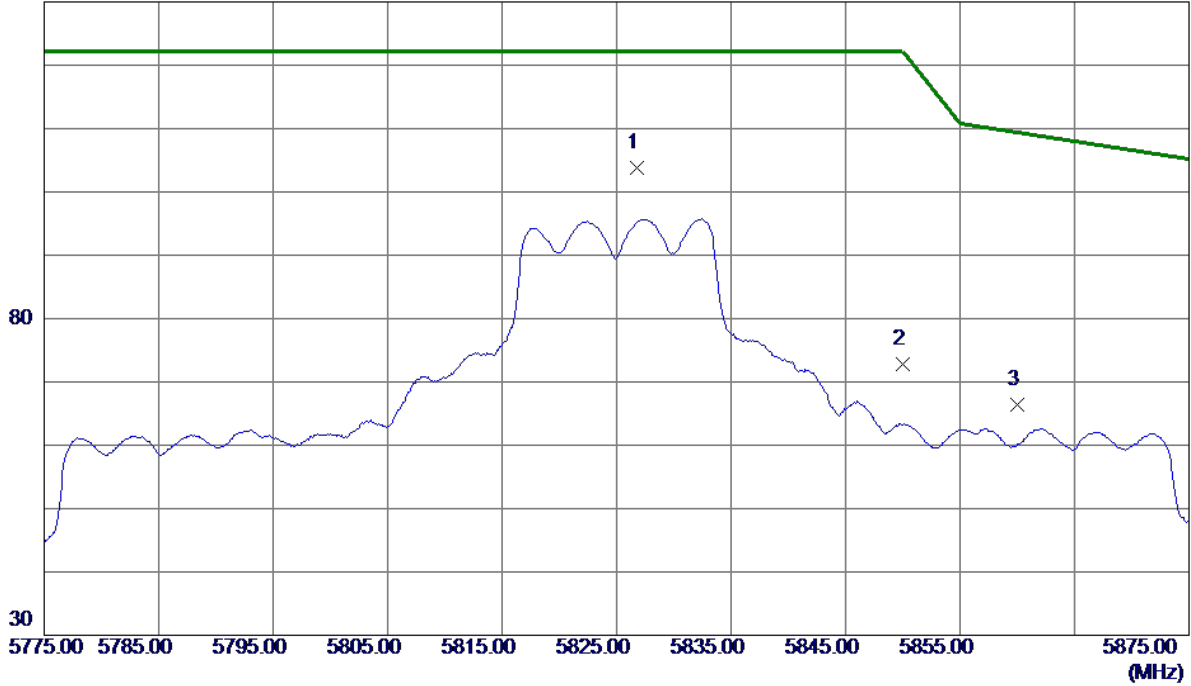

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5826.8000	92.71	11.00	103.71	122.20	-18.49	Peak	No Limit
2	5850.0000	61.65	11.06	72.71	122.20	-49.49	Peak	
3	5860.0000	55.39	11.09	66.48	109.40	-42.92	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825 MHz


Vertical

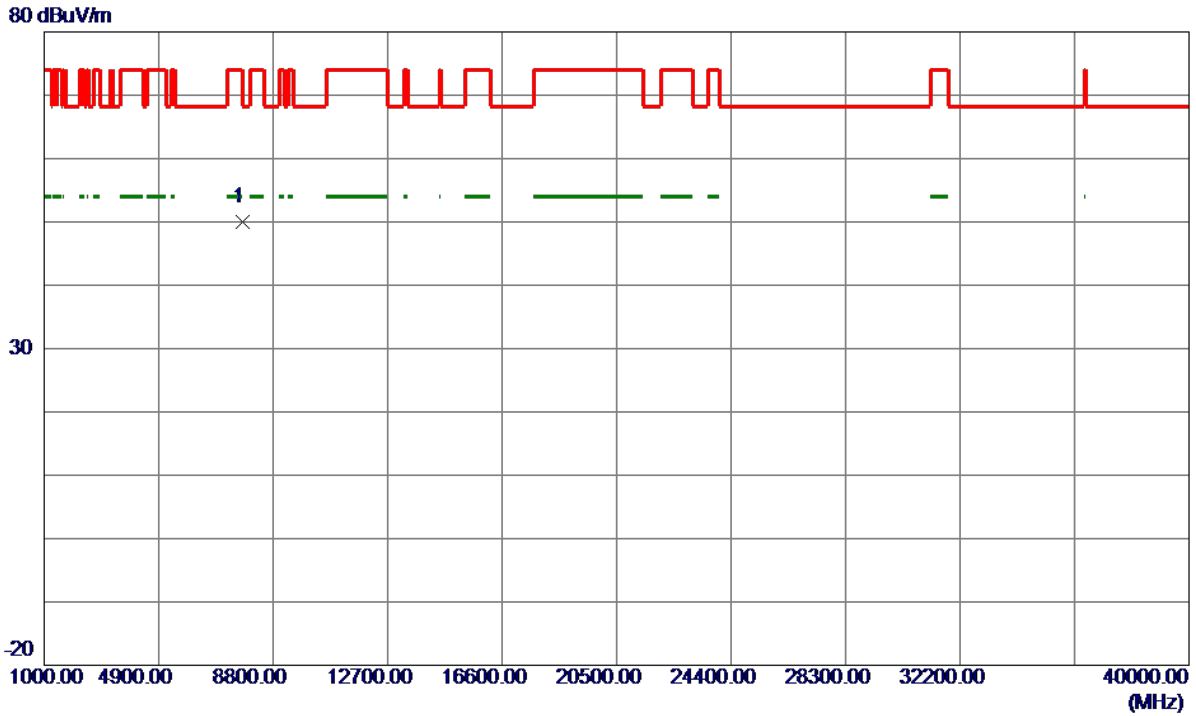

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7766.7340	37.61	12.31	49.92	68.30	-18.38	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825 MHz


Horizontal

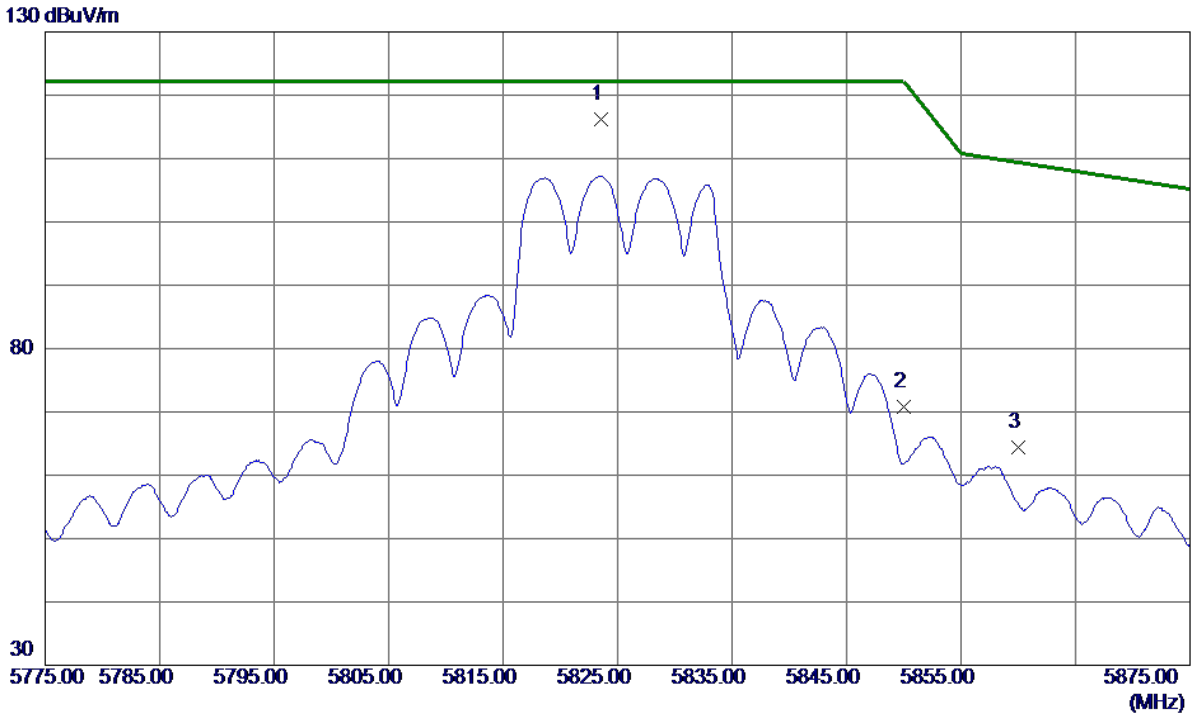

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5823.6000	93.55	22.60	116.15	122.20	-6.05	Peak	No Limit
2	5850.0000	48.10	22.63	70.73	122.20	-51.47	Peak	
3	5860.0000	41.68	22.64	64.32	109.40	-45.08	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825 MHz

Horizontal

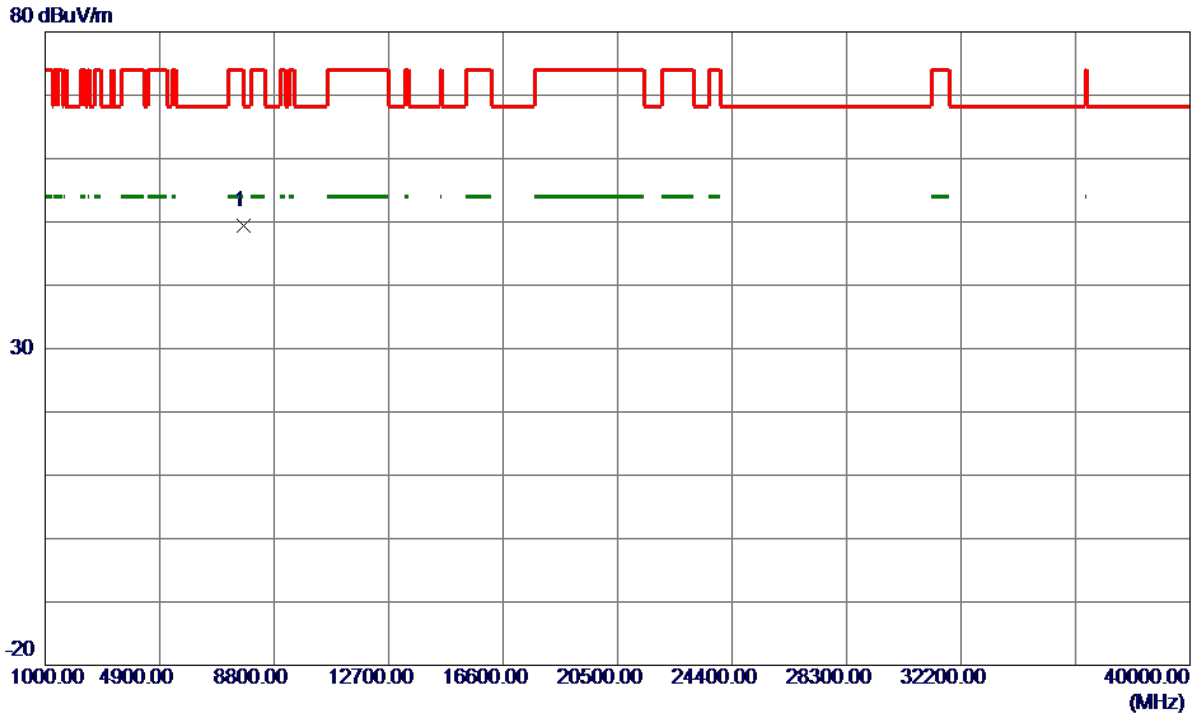


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7766.8520	37.11	12.31	49.42	68.30	-18.88	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745 MHz

Vertical


130 dBuV/m

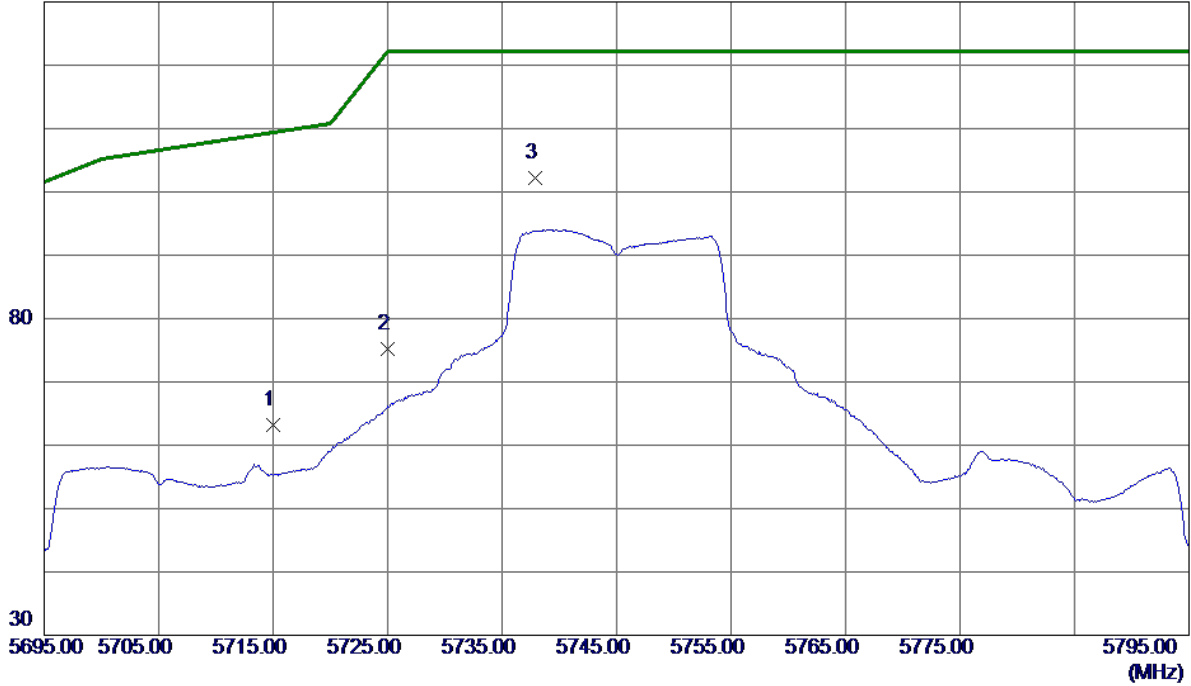

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	52.53	10.67	63.20	109.40	-46.20	Peak	
2	5725.0000	64.54	10.70	75.24	122.20	-46.96	Peak	
3 *	5737.9000	91.39	10.74	102.13	122.20	-20.07	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745 MHz

Vertical

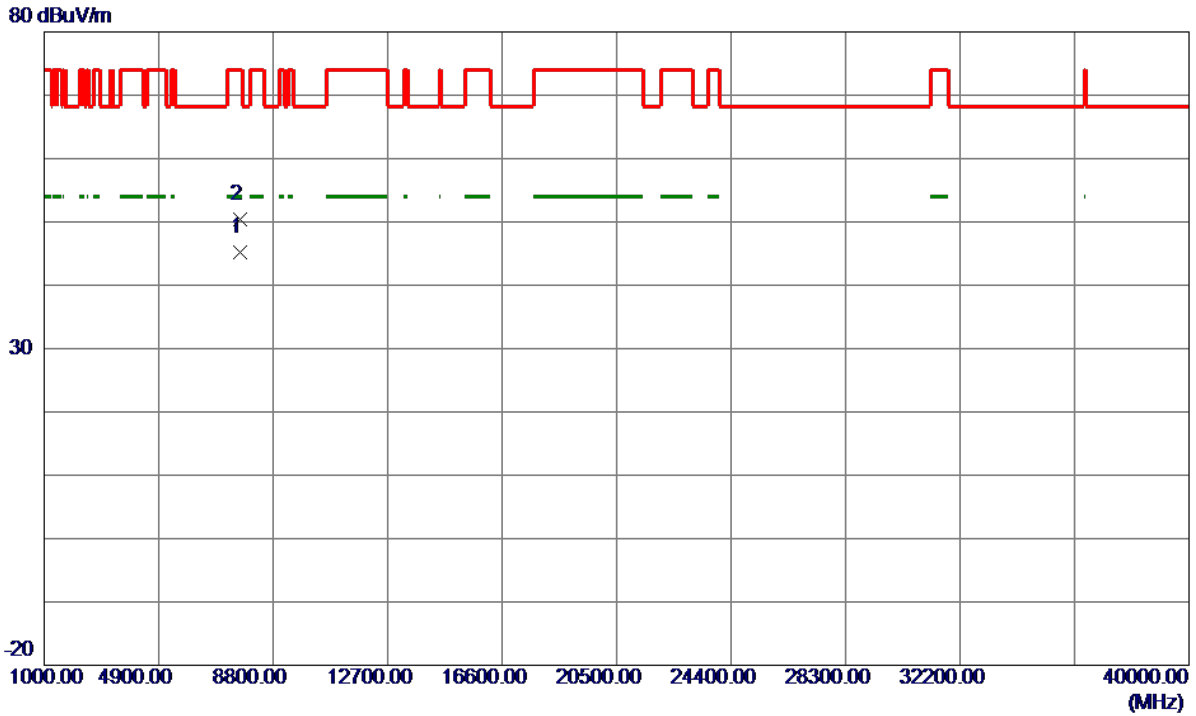


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7660.1040	32.80	12.36	45.16	54.00	-8.84	AVG	
2	7660.2440	37.97	12.36	50.33	74.00	-23.67	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745 MHz

Horizontal


130 dBuV/m

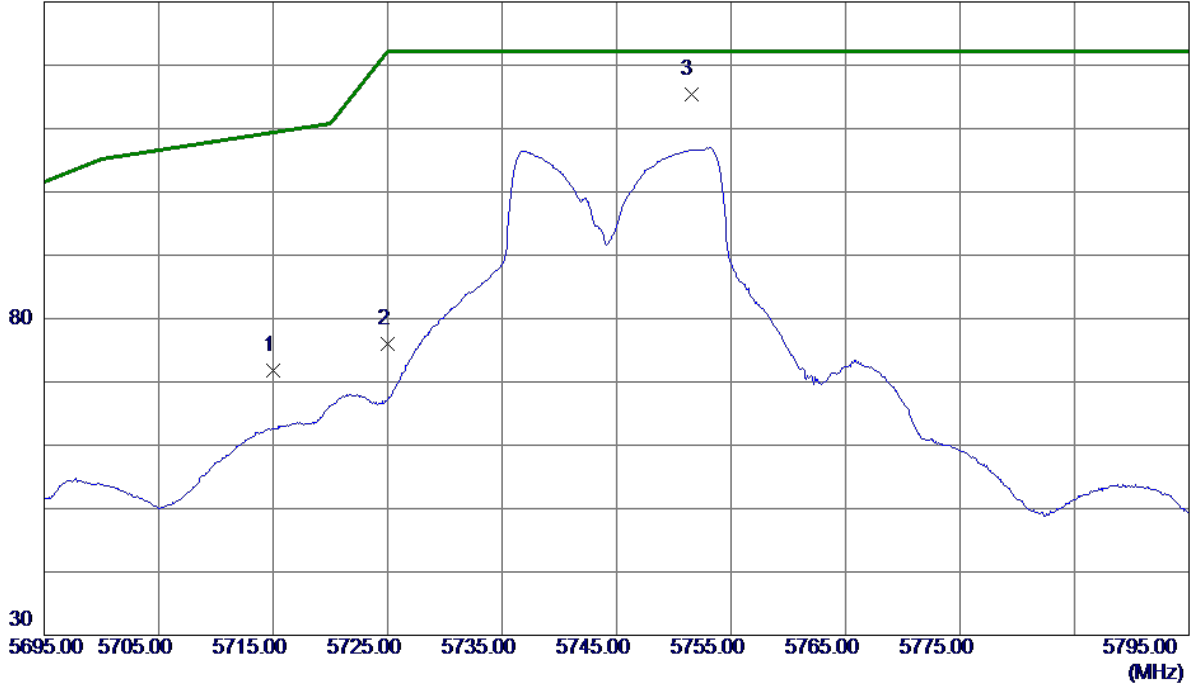

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	49.35	22.48	71.83	109.40	-37.57	Peak	
2	5725.0000	53.45	22.49	75.94	122.20	-46.26	Peak	
3 *	5751.5000	92.94	22.52	115.46	122.20	-6.74	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745 MHz

Horizontal

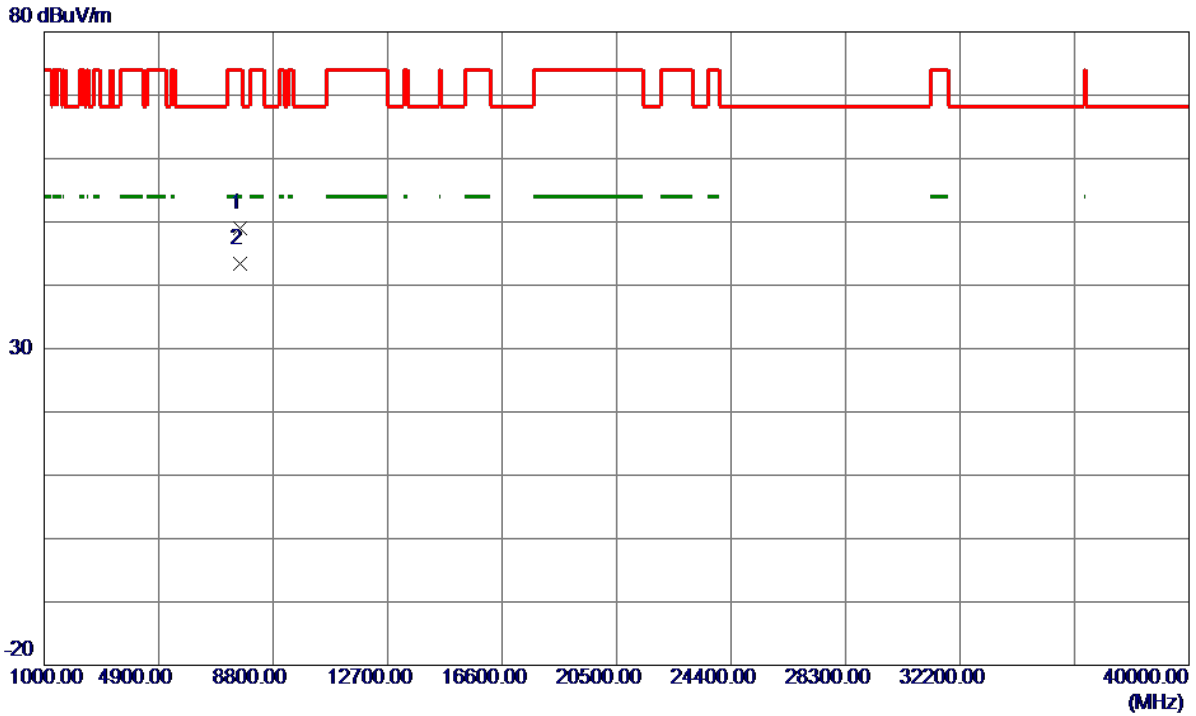


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7659.9780	36.64	12.36	49.00	74.00	-25.00	Peak	
2 *	7660.1260	31.07	12.36	43.43	54.00	-10.57	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785 MHz

Vertical


130 dBuV/m

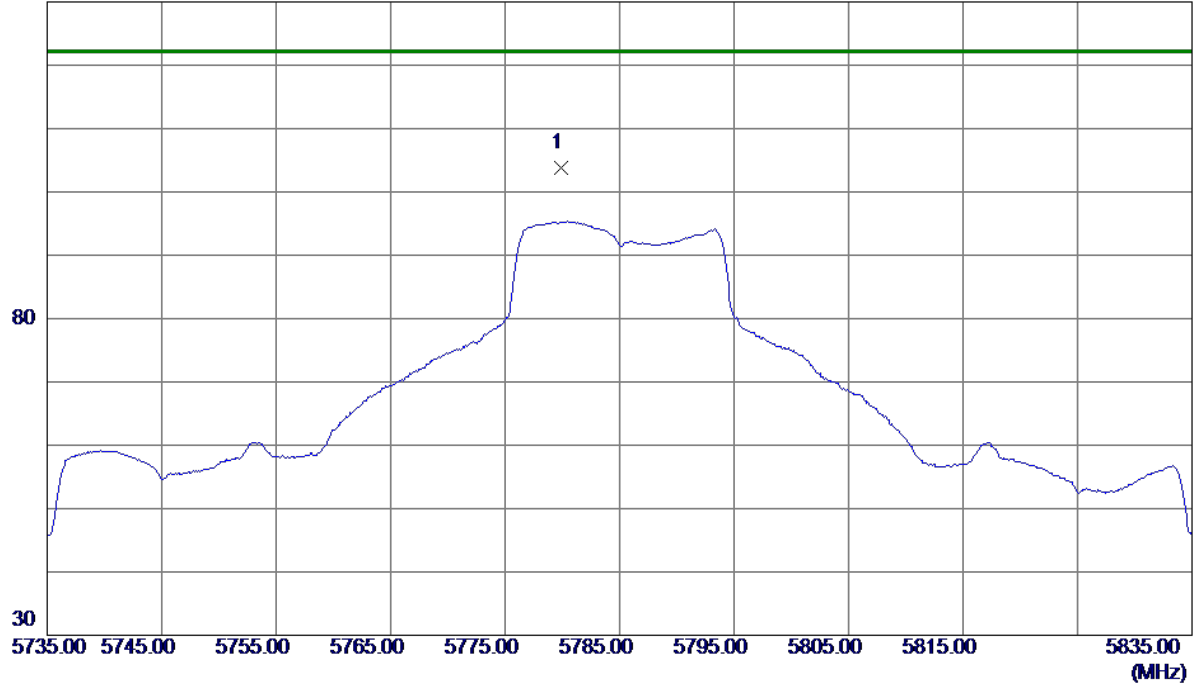

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5779.9000	92.89	10.86	103.75	122.20	-18.45	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785 MHz


Vertical

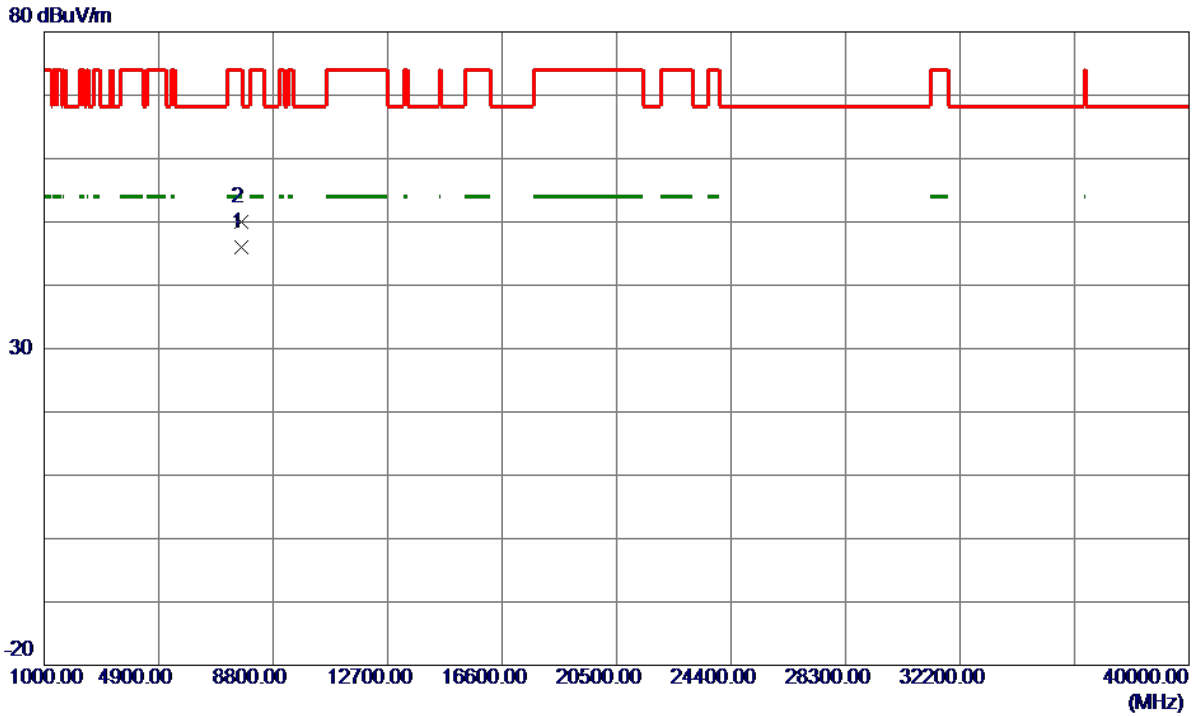

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7713.4060	33.69	12.34	46.03	54.00	-7.97	AVG	
2	7713.5020	37.74	12.34	50.08	74.00	-23.92	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785 MHz


Horizontal

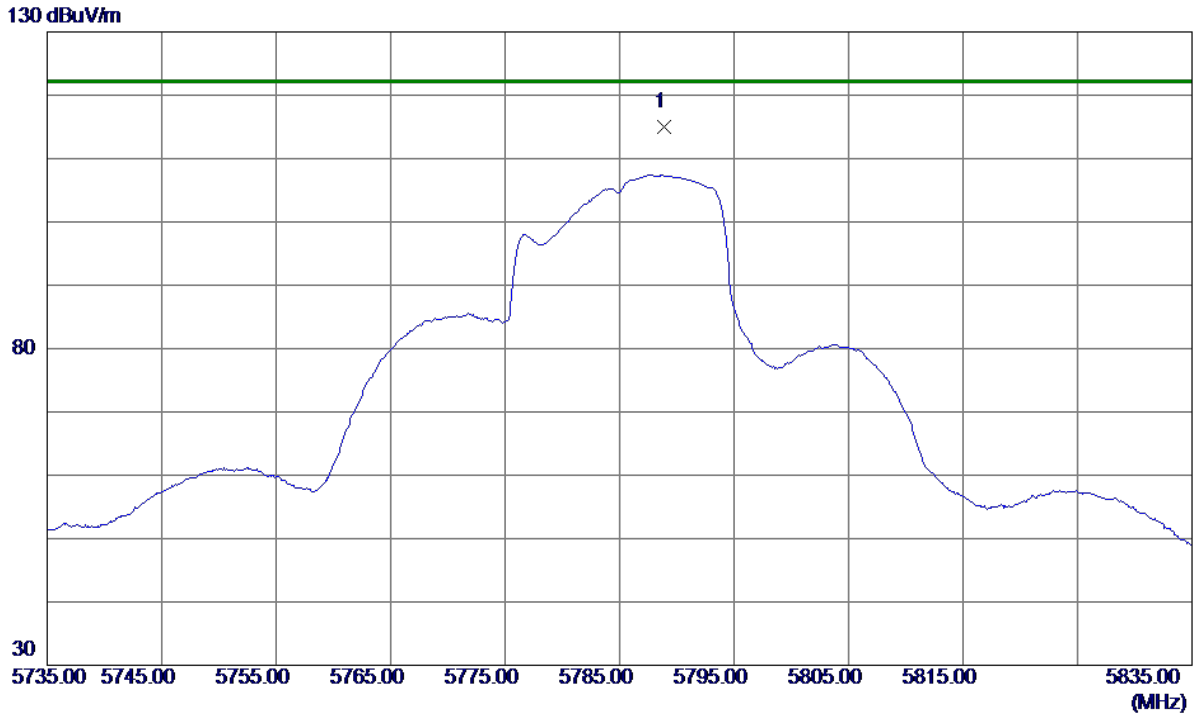

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5788.9000	92.36	22.56	114.92	122.20	-7.28	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785 MHz


Horizontal

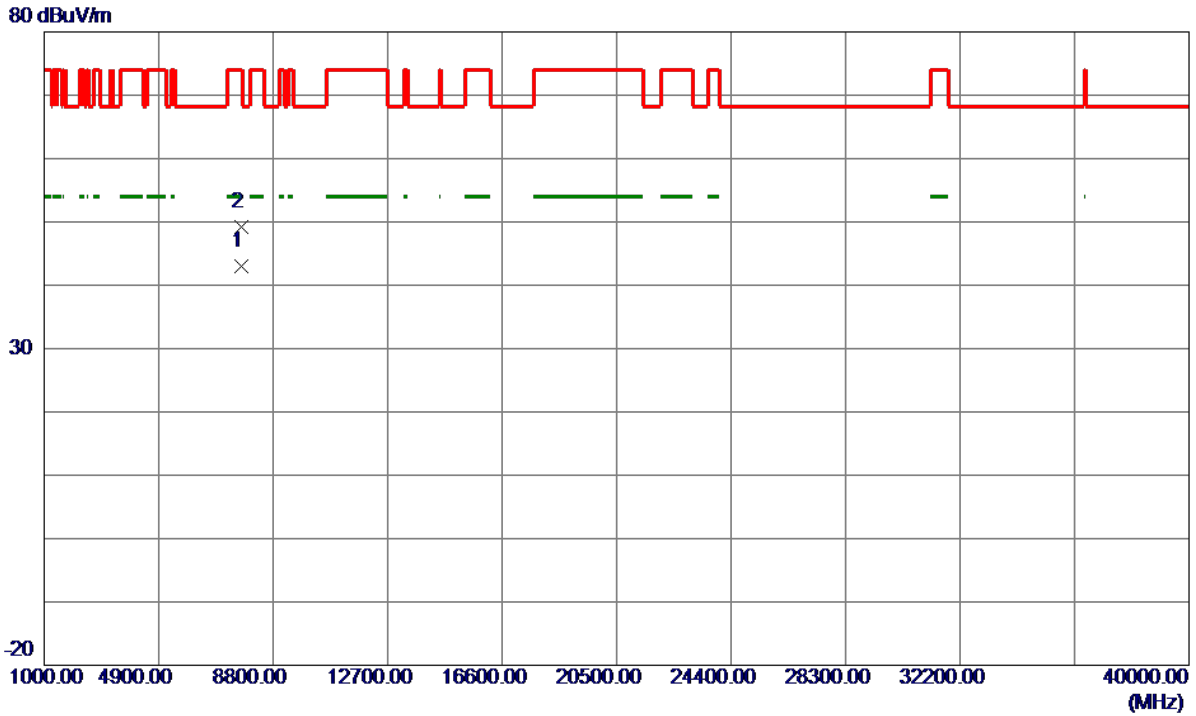

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7713.4500	30.66	12.34	43.00	54.00	-11.00	AVG	
2	7713.6140	36.83	12.34	49.17	74.00	-24.83	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825 MHz


Vertical

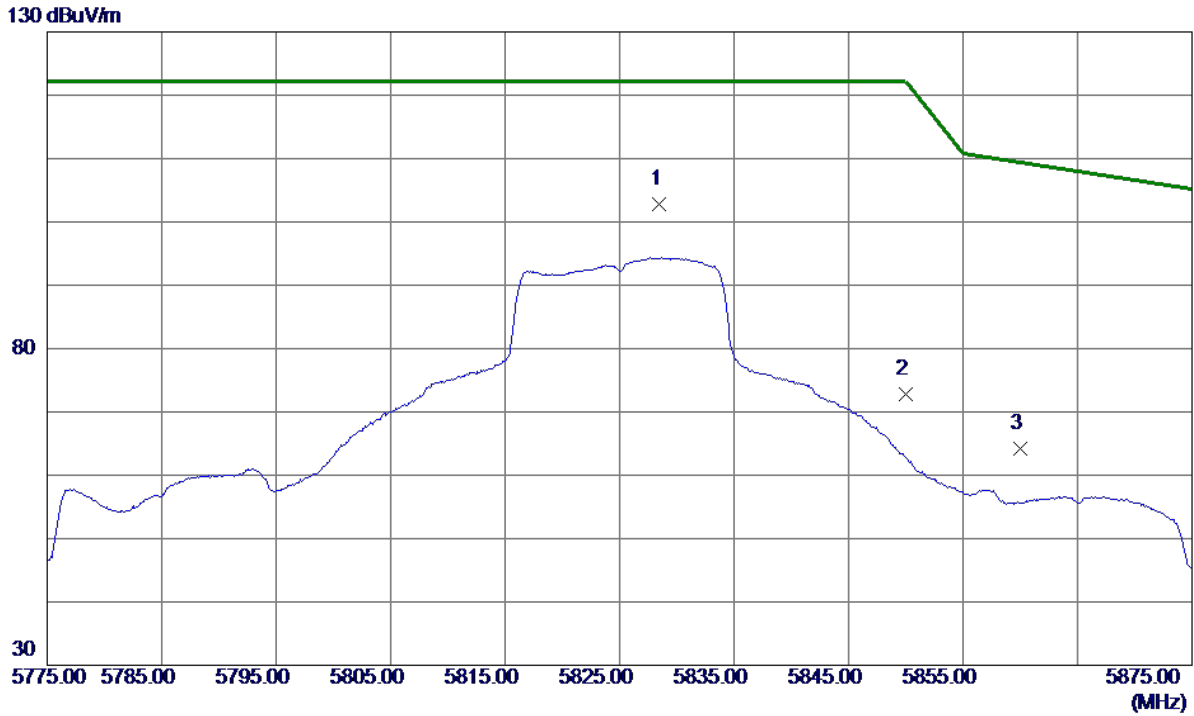

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5828.5000	91.79	11.00	102.79	122.20	-19.41	Peak	No Limit
2	5850.0000	61.80	11.06	72.86	122.20	-49.34	Peak	
3	5860.0000	53.19	11.09	64.28	109.40	-45.12	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825 MHz


Vertical

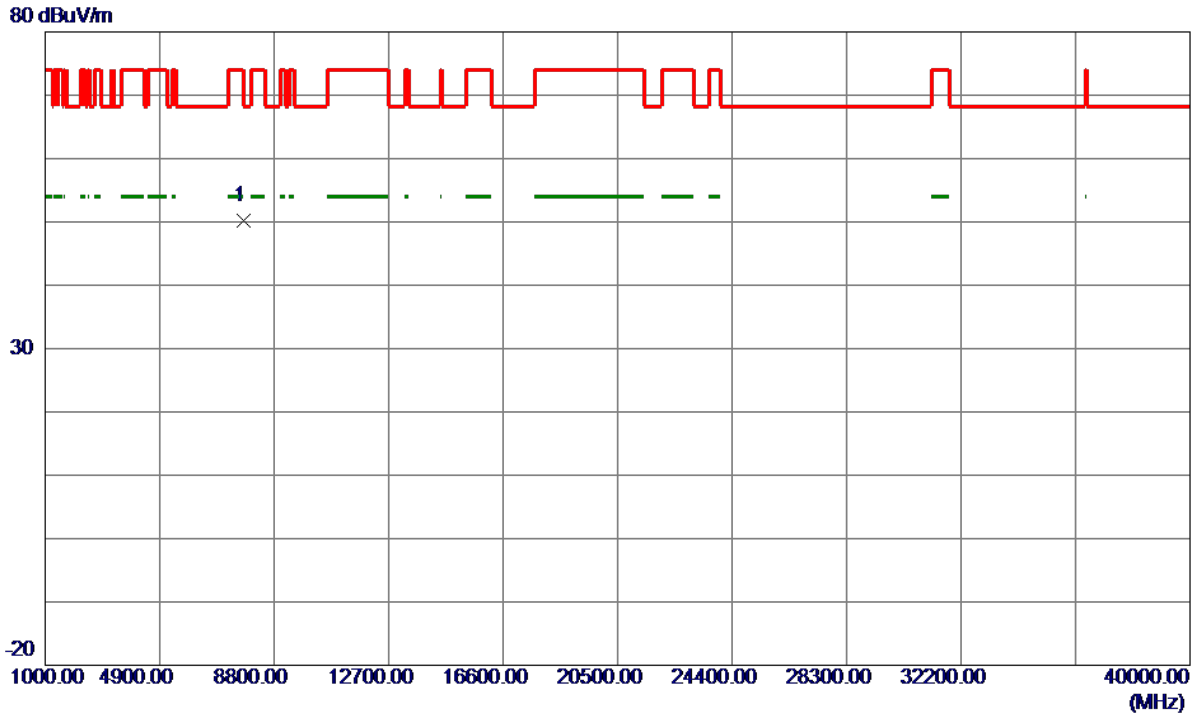

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7766.8560	37.87	12.31	50.18	68.30	-18.12	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825 MHz


Horizontal

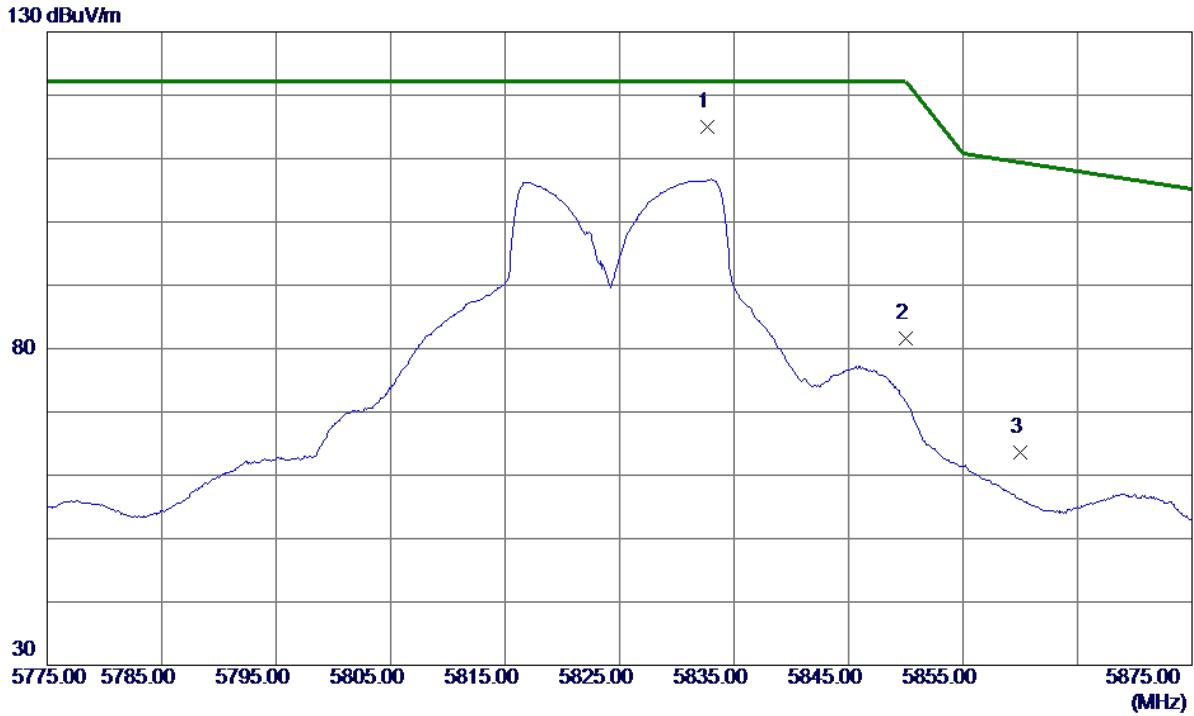

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5832.7000	92.40	22.61	115.01	122.20	-7.19	Peak	No Limit
2	5850.0000	59.00	22.63	81.63	122.20	-40.57	Peak	
3	5860.0000	40.98	22.64	63.62	109.40	-45.78	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825 MHz

Horizontal

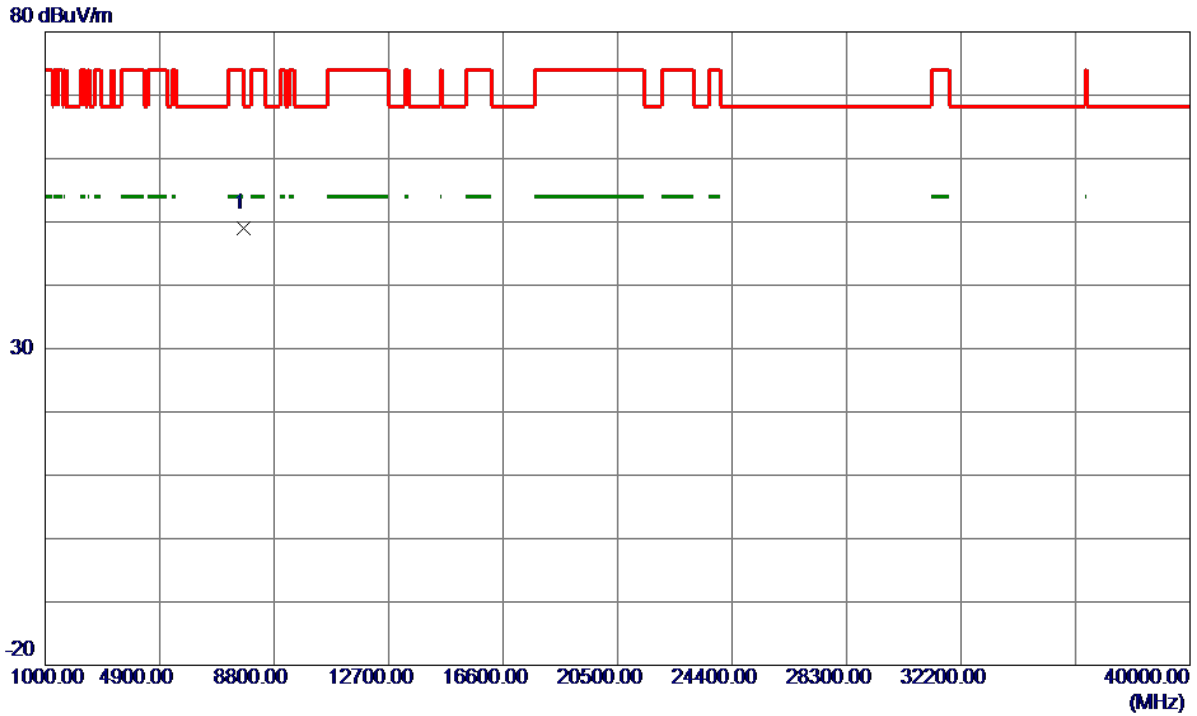


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7766.5420	36.77	12.31	49.08	68.30	-19.22	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz

Vertical


130 dBuV/m

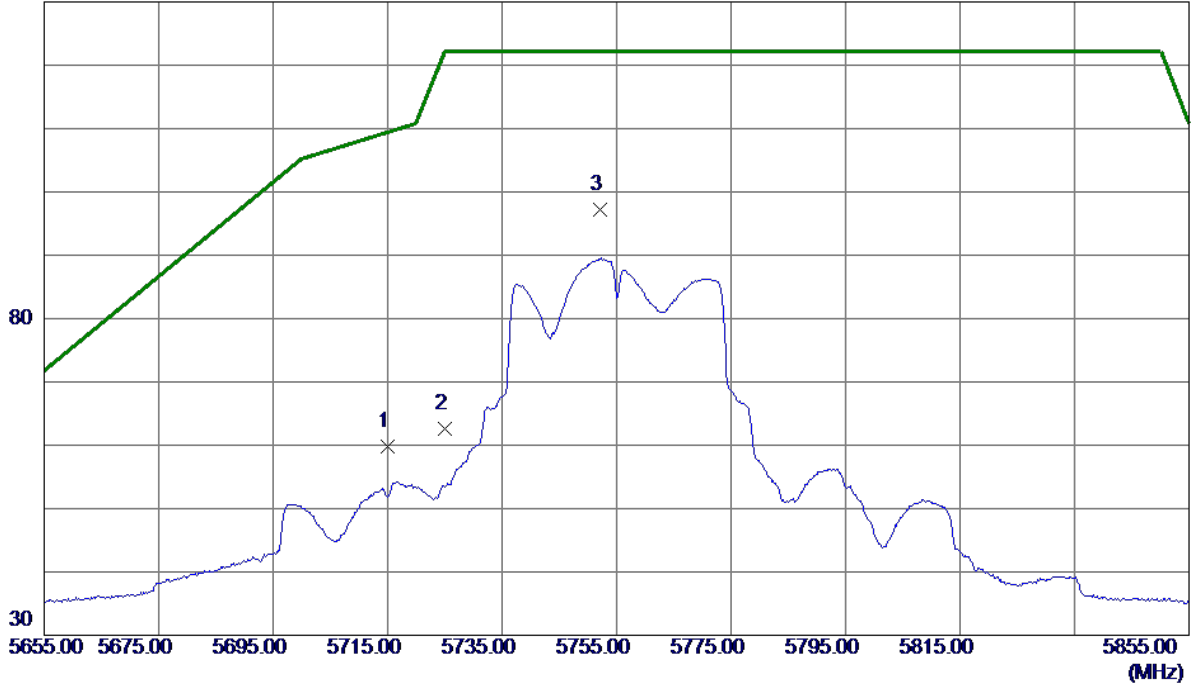

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	49.16	10.67	59.83	109.40	-49.57	Peak	
2	5725.0000	51.95	10.70	62.65	122.20	-59.55	Peak	
3 *	5752.2000	86.33	10.78	97.11	122.20	-25.09	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz

Vertical

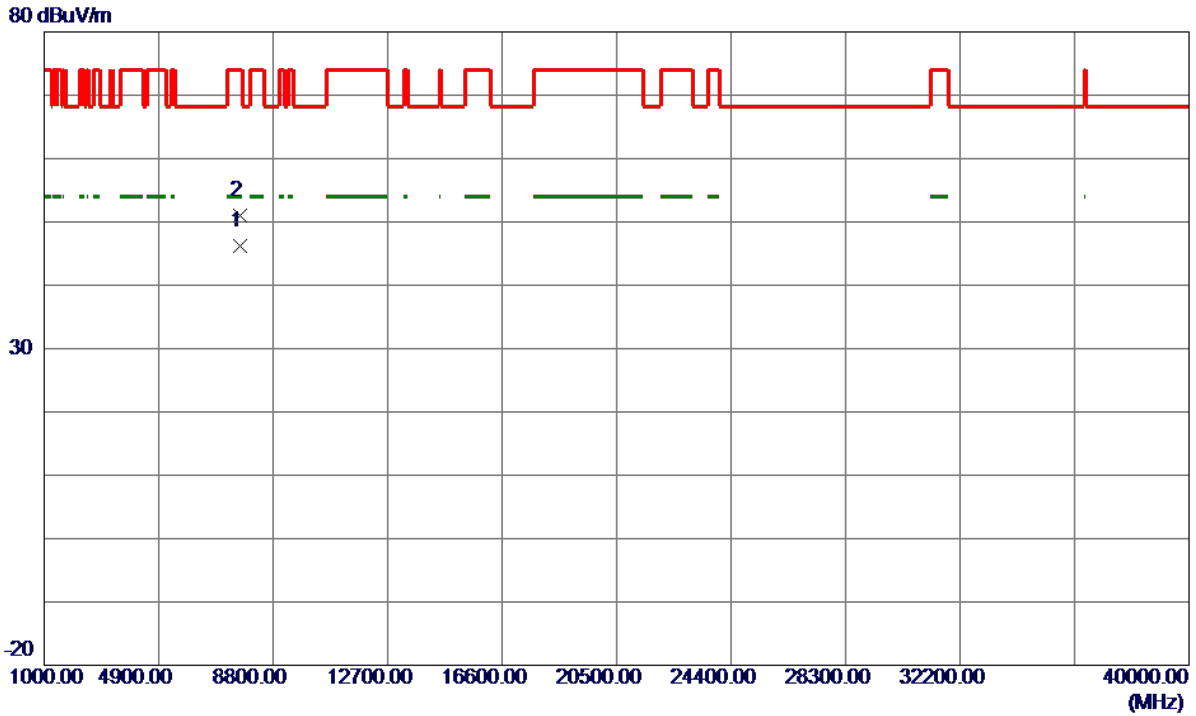


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7673.3760	33.83	12.36	46.19	54.00	-7.81	AVG	
2	7673.5160	38.72	12.36	51.08	74.00	-22.92	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz

Horizontal


130 dBuV/m

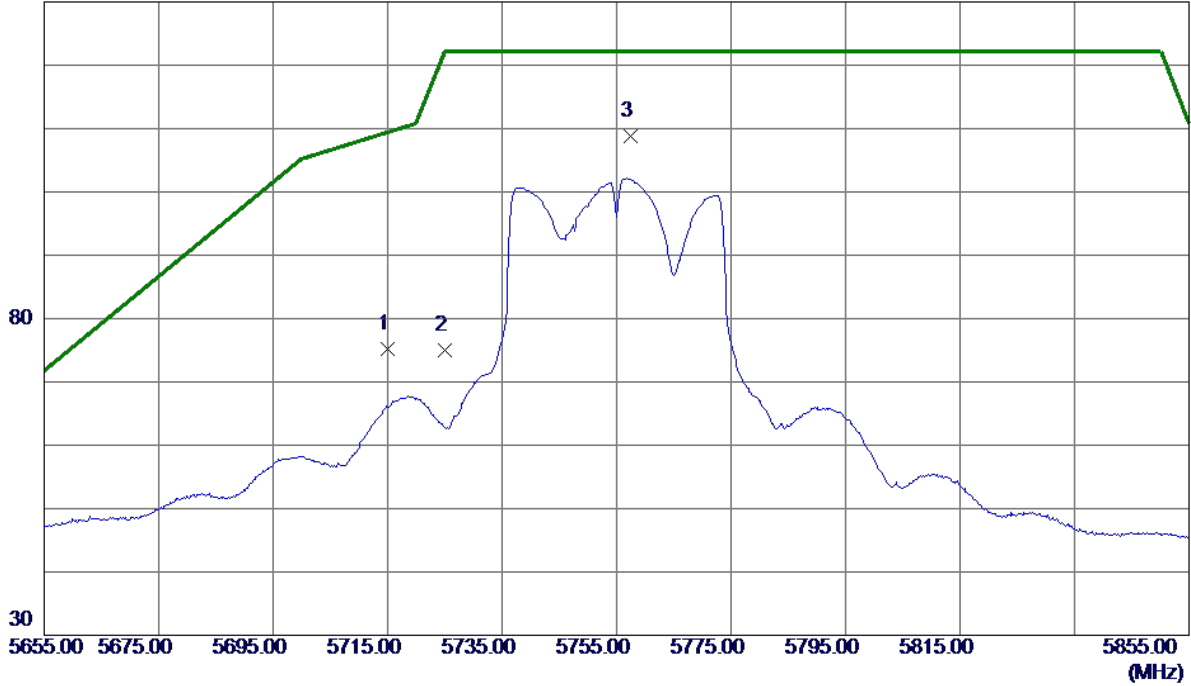

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	52.63	22.48	75.11	109.40	-34.29	Peak	
2	5725.0000	52.49	22.49	74.98	122.20	-47.22	Peak	
3 *	5757.4000	86.34	22.53	108.87	122.20	-13.33	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz


Horizontal

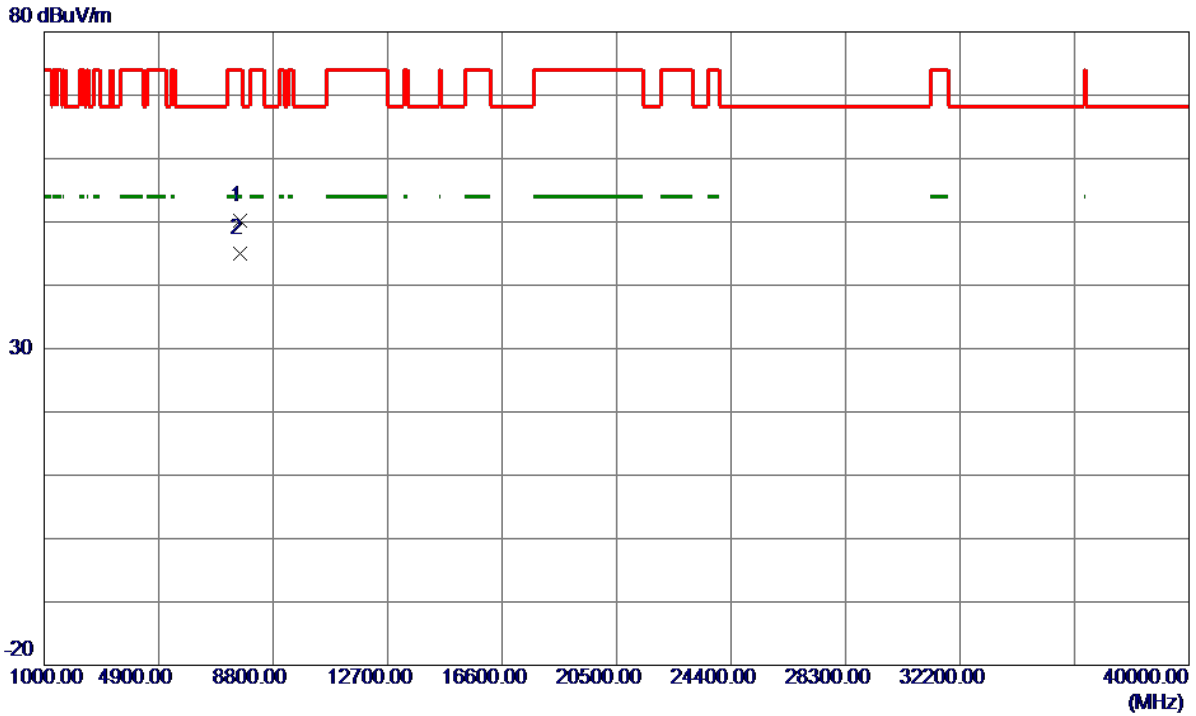

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7673.3440	37.81	12.36	50.17	74.00	-23.83	Peak	
2 *	7673.3900	32.61	12.36	44.97	54.00	-9.03	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz


Vertical

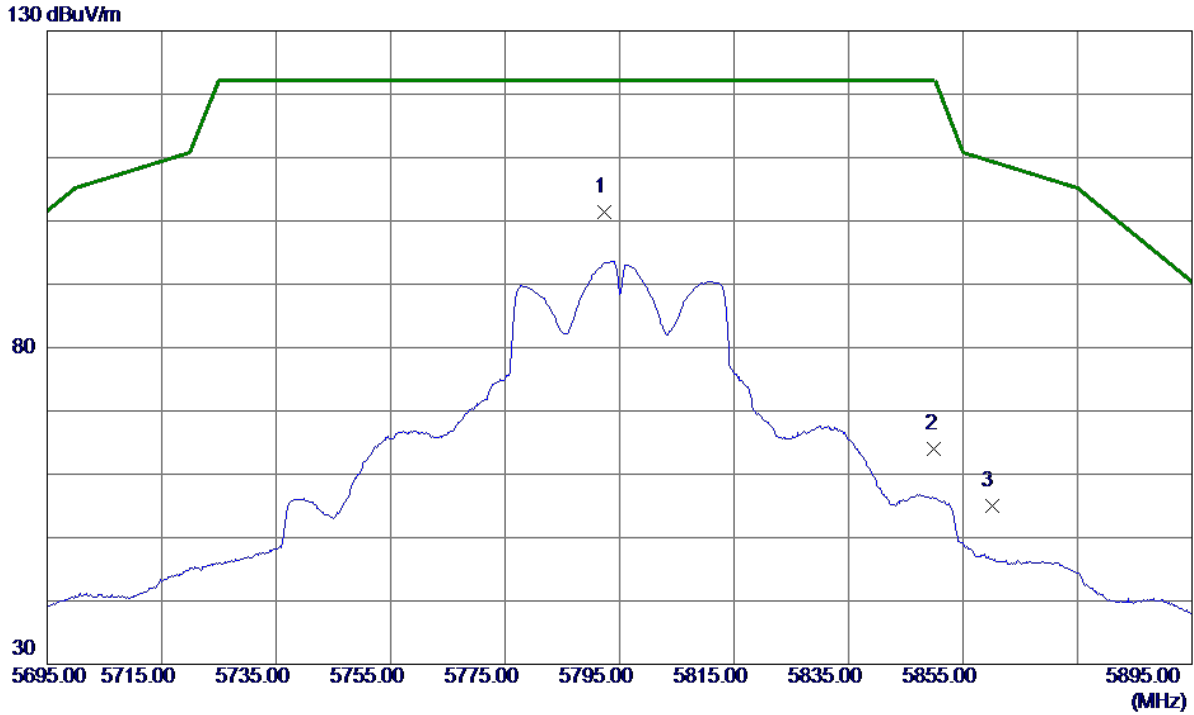

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5792.4000	90.41	10.90	101.31	122.20	-20.89	Peak	No Limit
2	5850.0000	52.95	11.06	64.01	122.20	-58.19	Peak	
3	5860.0000	44.00	11.09	55.09	109.40	-54.31	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz


Vertical

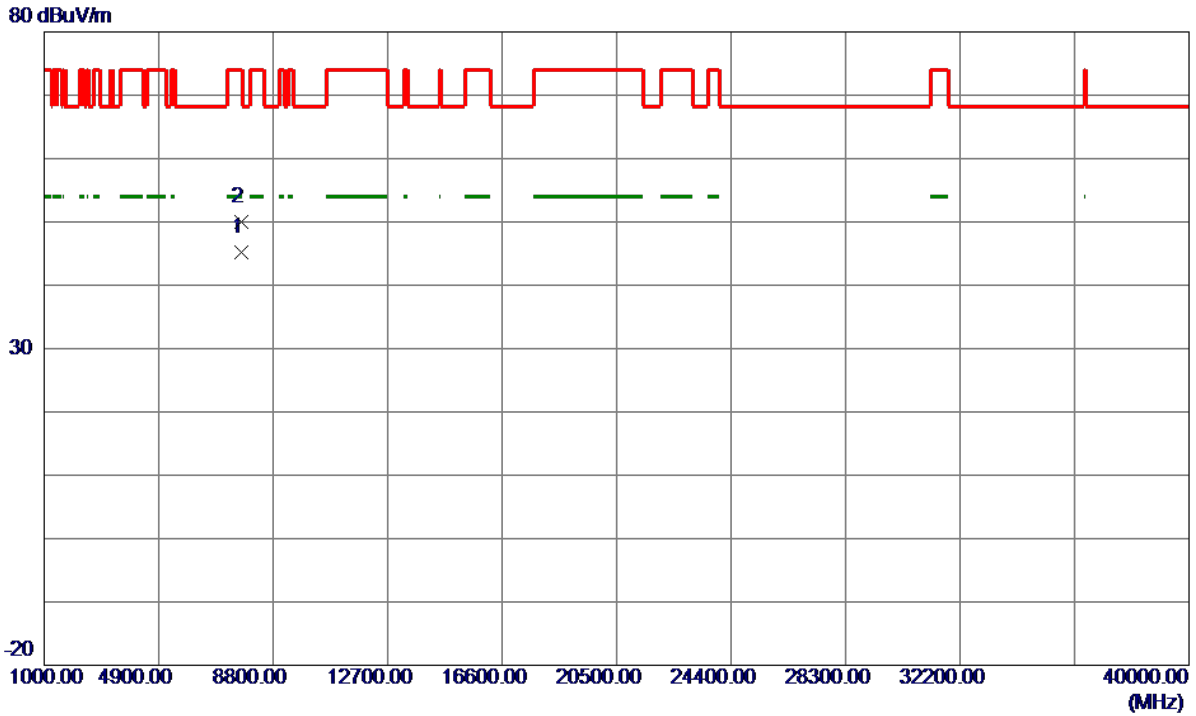

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7726.7000	32.89	12.33	45.22	54.00	-8.78	AVG	
2	7726.7500	37.62	12.33	49.95	74.00	-24.05	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz


Horizontal

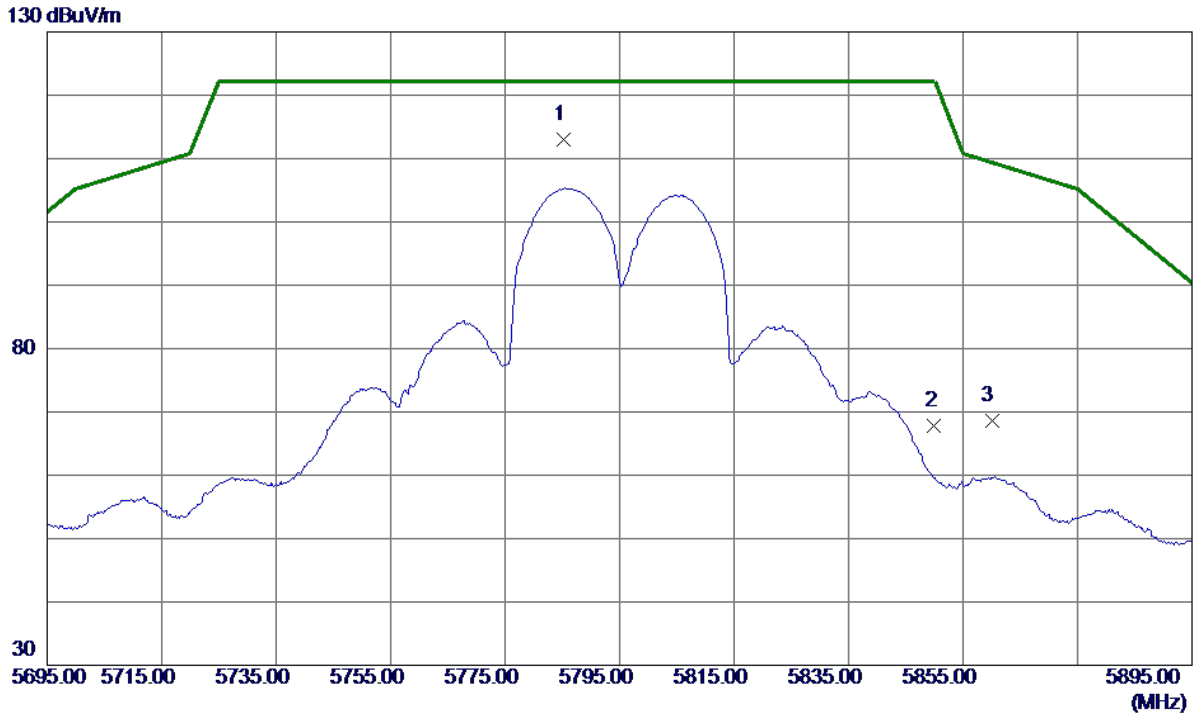

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5785.2000	90.47	22.56	113.03	122.20	-9.17	Peak	No Limit
2	5850.0000	45.08	22.63	67.71	122.20	-54.49	Peak	
3	5860.0000	45.87	22.64	68.51	109.40	-40.89	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz

Horizontal

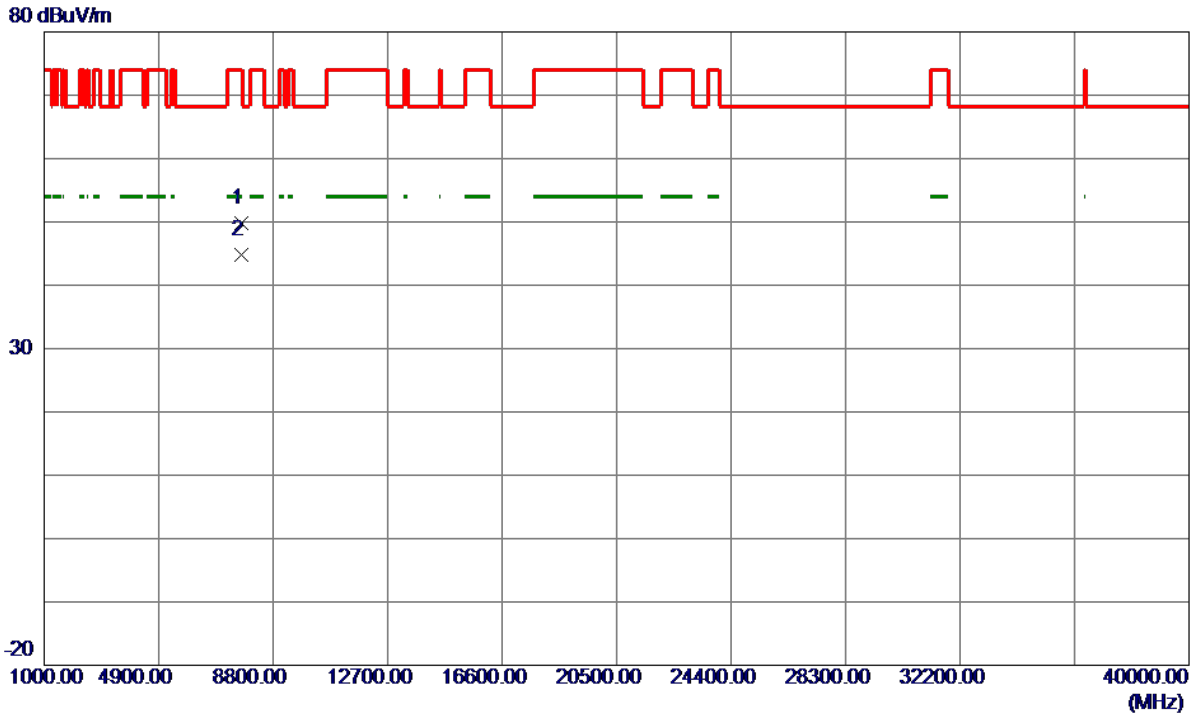


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7726.6440	37.38	12.33	49.71	74.00	-24.29	Peak	
2 *	7726.7160	32.40	12.33	44.73	54.00	-9.27	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180 MHz

Vertical


130 dBuV/m

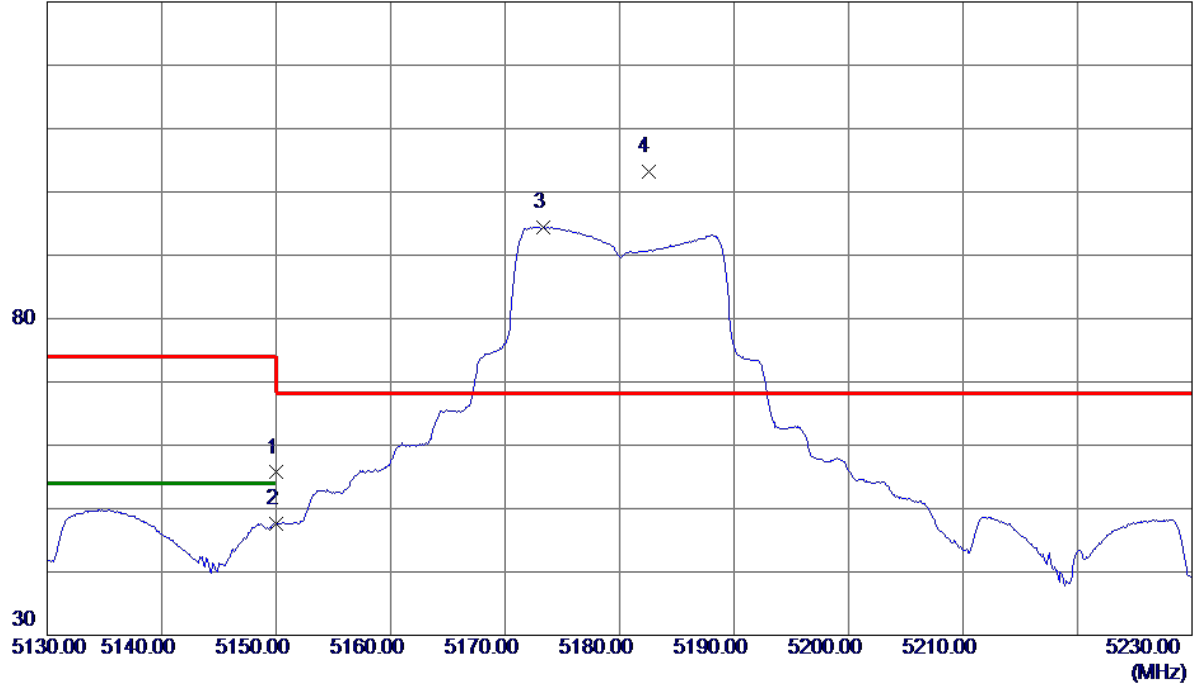

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	46.39	9.31	55.70	74.00	-18.30	Peak	
2	5150.0000	38.27	9.31	47.58	54.00	-6.42	AVG	
3	5173.3000	85.06	9.36	94.42	999.00	-904.58	AVG	No Limit
4 *	5182.5000	93.81	9.38	103.19	68.30	34.89	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180 MHz

Vertical

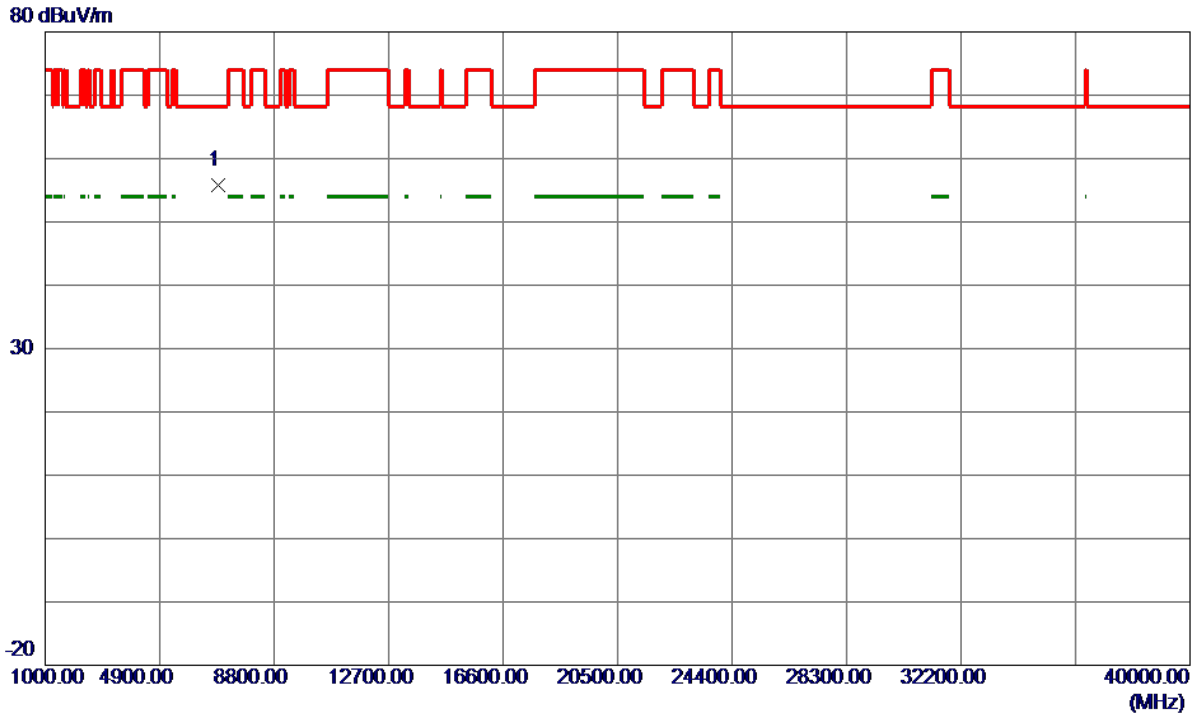


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6906.5680	44.79	11.02	55.81	68.30	-12.49	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180 MHz

Horizontal


130 dBuV/m

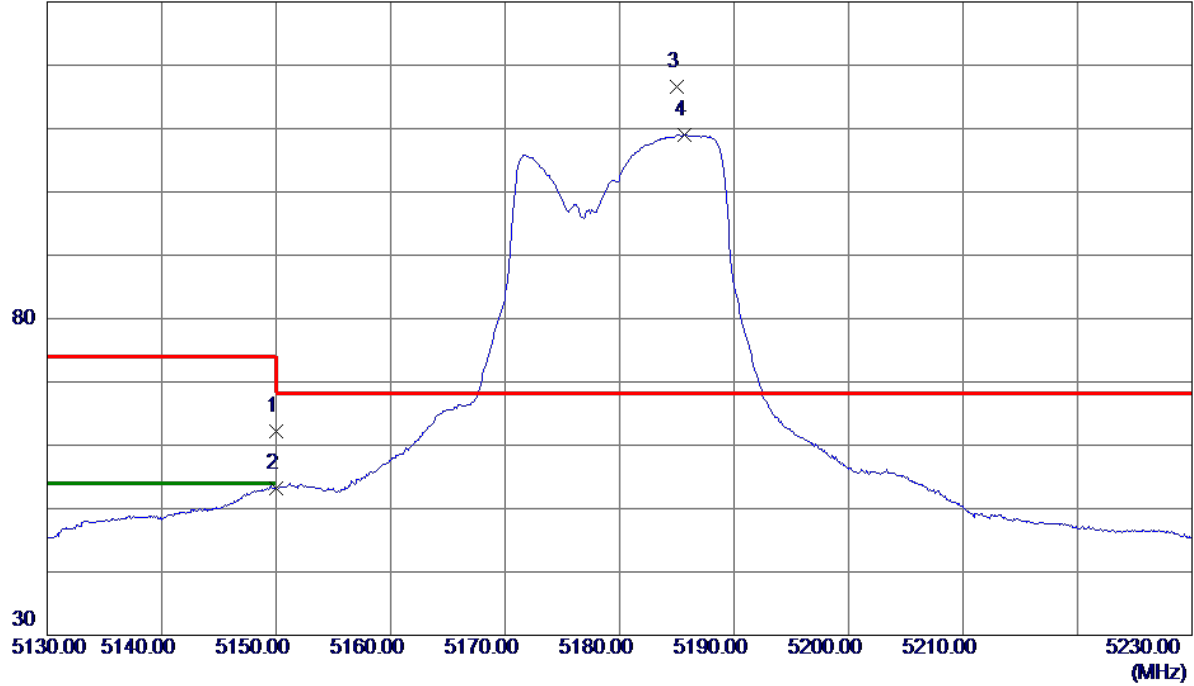

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	47.87	14.32	62.19	74.00	-11.81	Peak	
2	5150.0000	38.81	14.32	53.13	54.00	-0.87	AVG	
3 *	5185.0000	102.18	14.41	116.59	68.30	48.29	Peak	No Limit
4	5185.6500	94.62	14.41	109.03	999.00	-889.97	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180 MHz

Horizontal

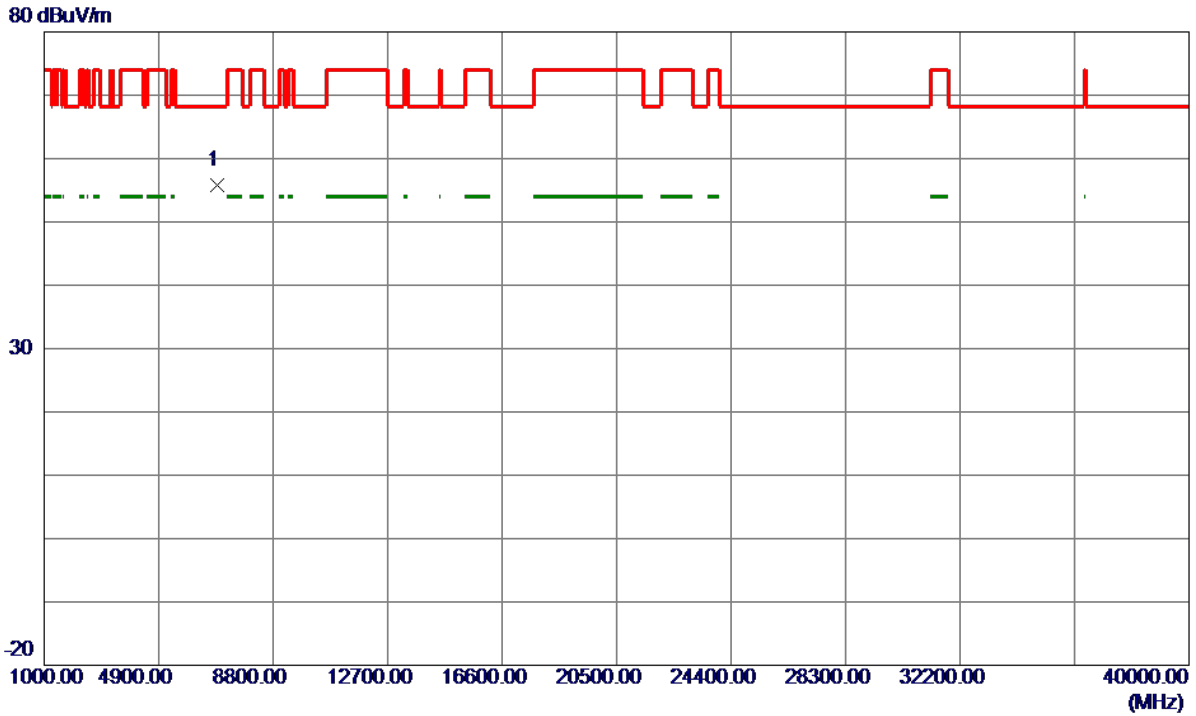


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6906.8600	44.72	11.02	55.74	68.30	-12.56	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200 MHz

Vertical


130 dBuV/m

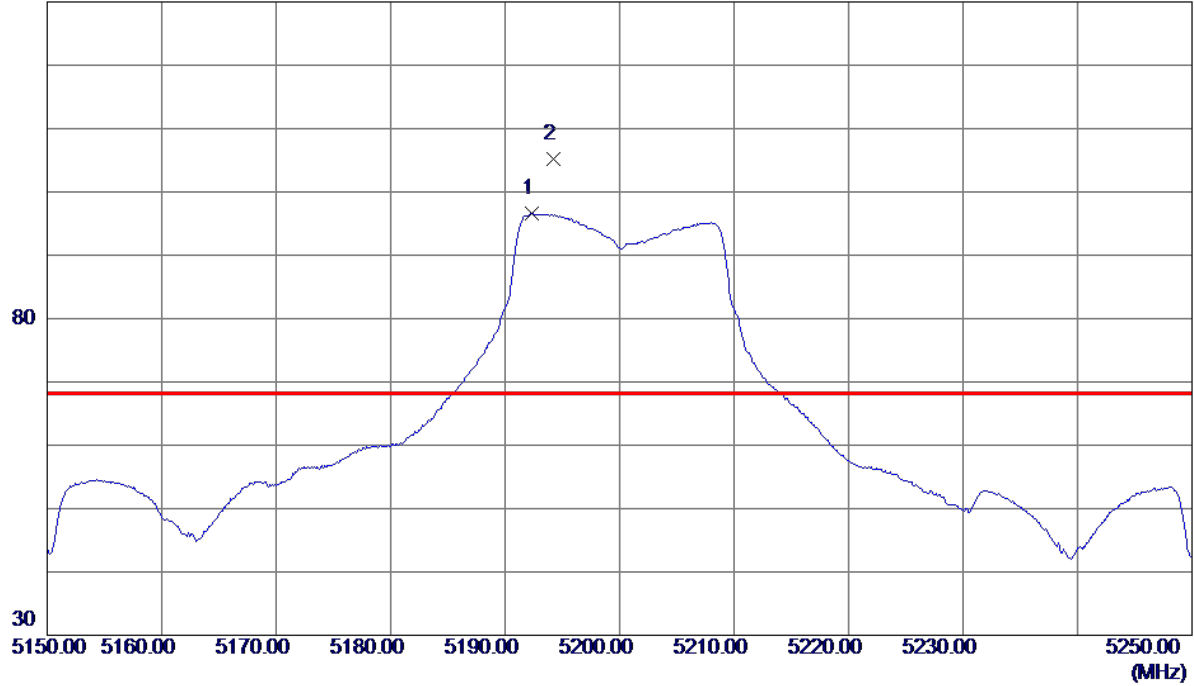

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5192.3000	87.18	9.40	96.58	999.00	-902.42	AVG	No Limit
2 *	5194.2000	95.78	9.41	105.19	68.30	36.89	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200 MHz

Vertical

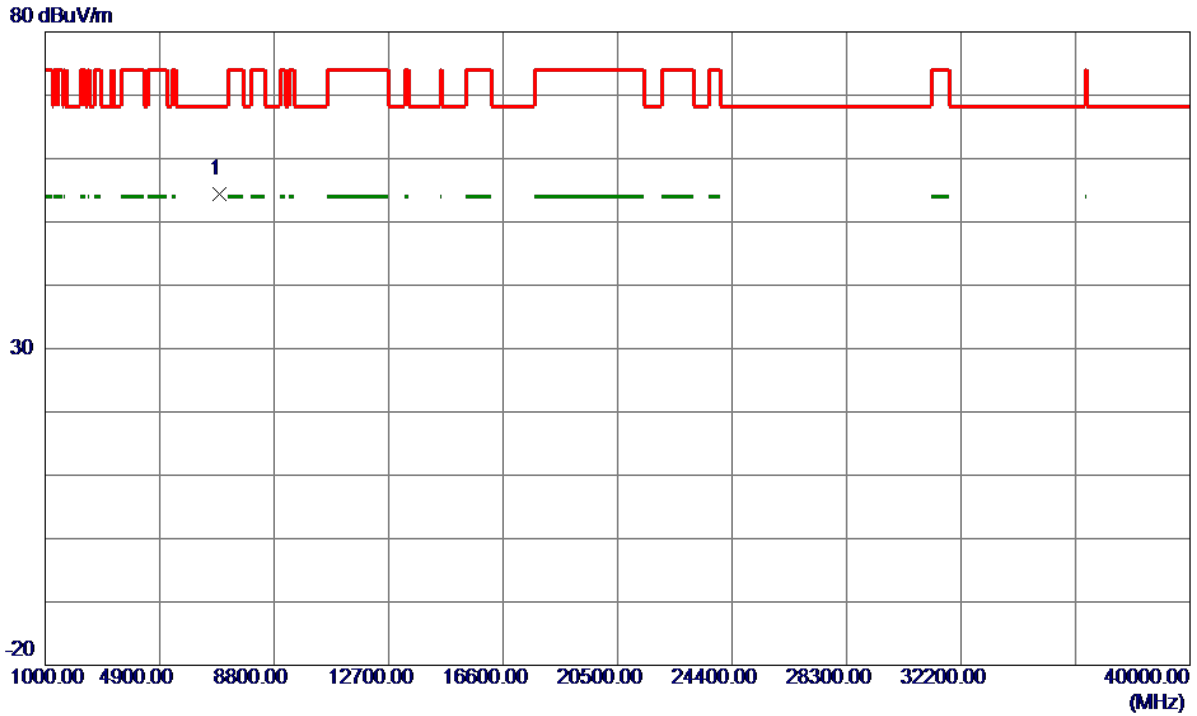


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6933.5200	43.37	11.08	54.45	68.30	-13.85	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200 MHz

Horizontal


130 dBuV/m

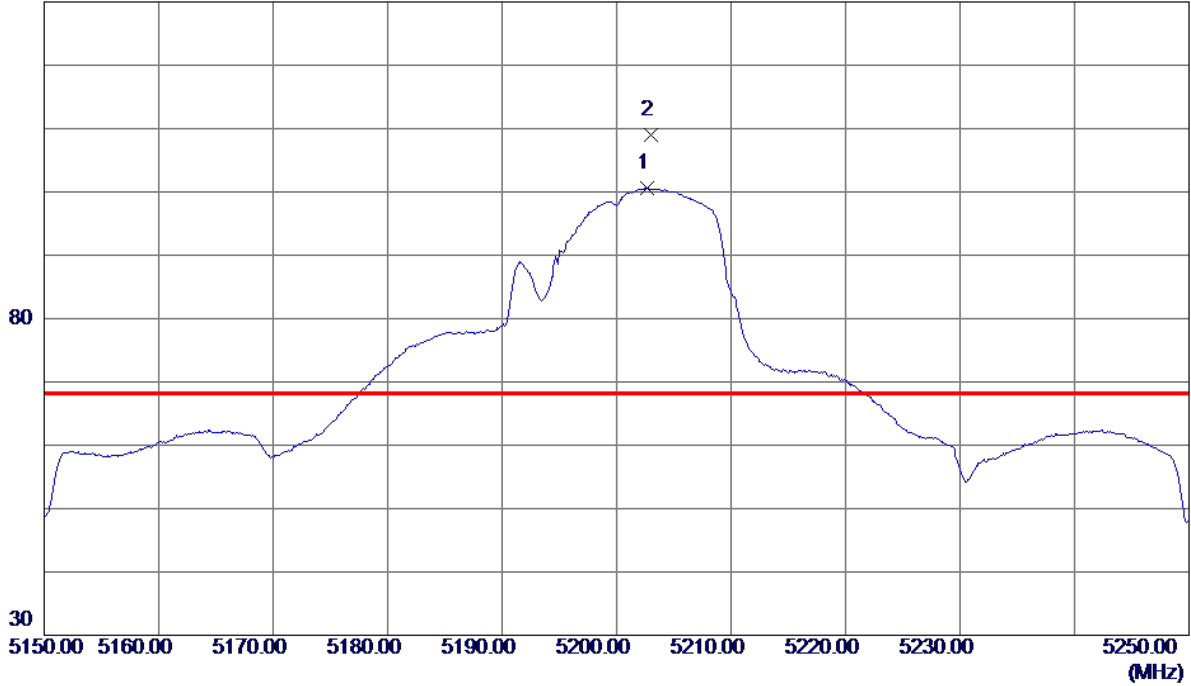

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5202.7000	91.22	9.43	100.65	999.00	-898.35	AVG	No Limit
2 *	5203.0000	99.61	9.43	109.04	68.30	40.74	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200 MHz

Horizontal

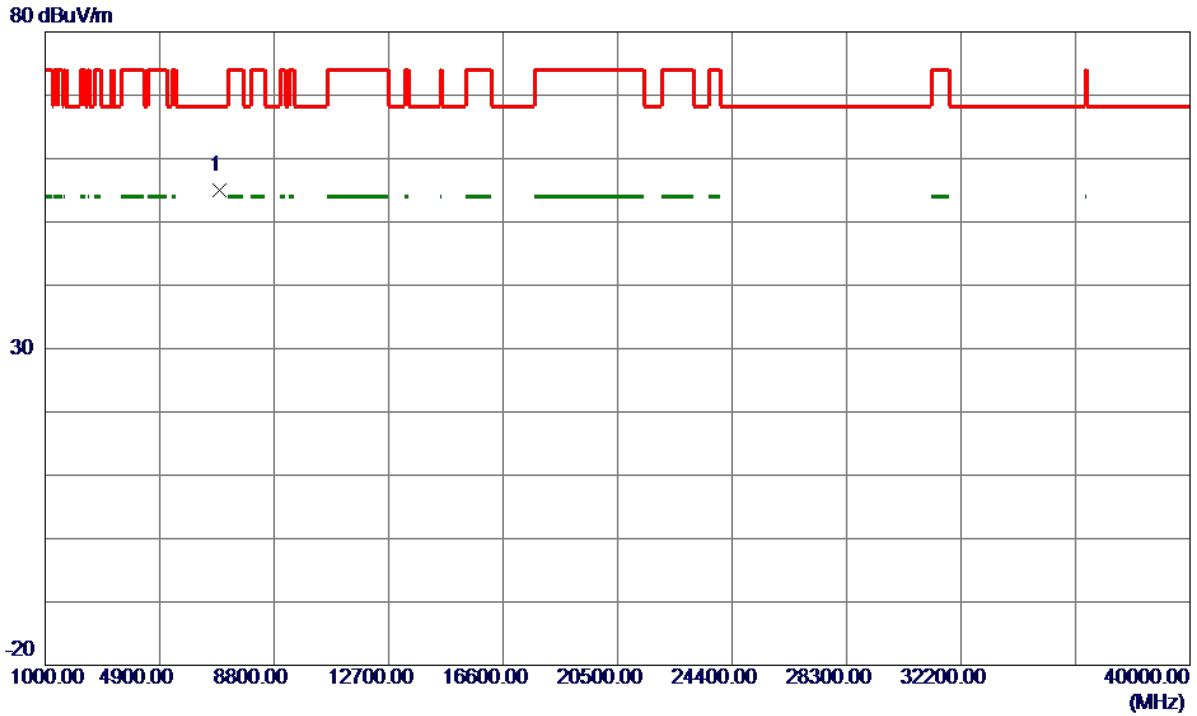


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6933.5440	43.92	11.08	55.00	68.30	-13.30	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240 MHz

Vertical


130 dBuV/m

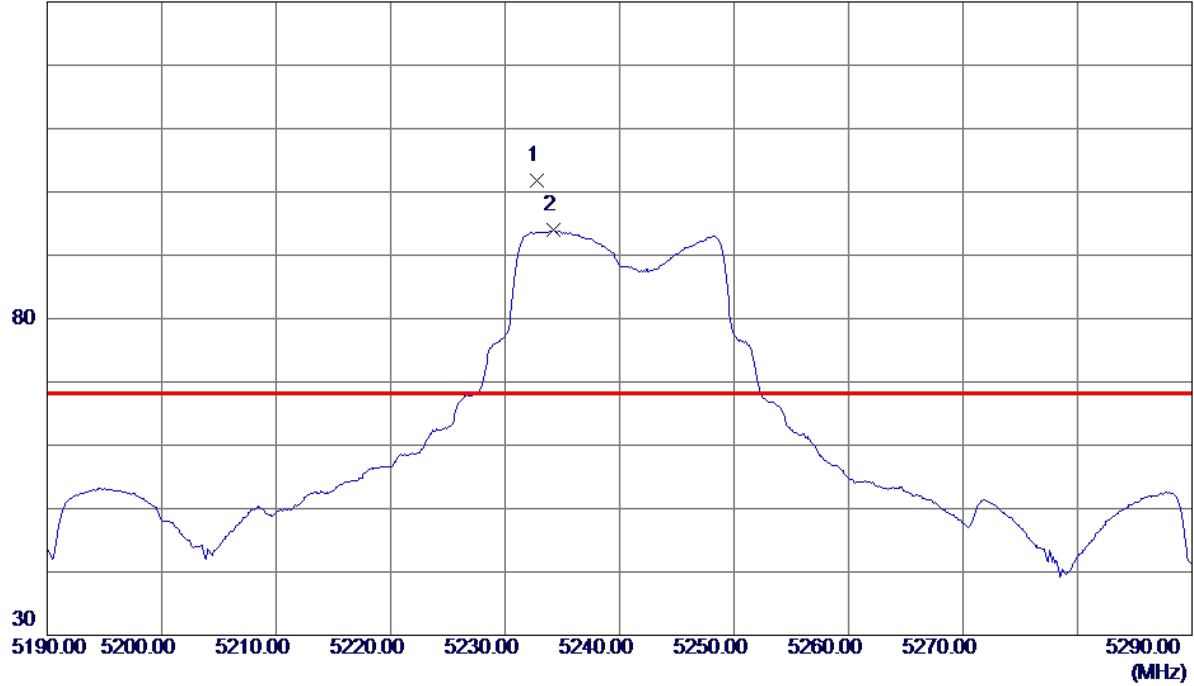

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5232.8000	92.35	9.49	101.84	68.30	33.54	Peak	No Limit
2	5234.2000	84.41	9.49	93.90	999.00	-905.10	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240 MHz

Vertical

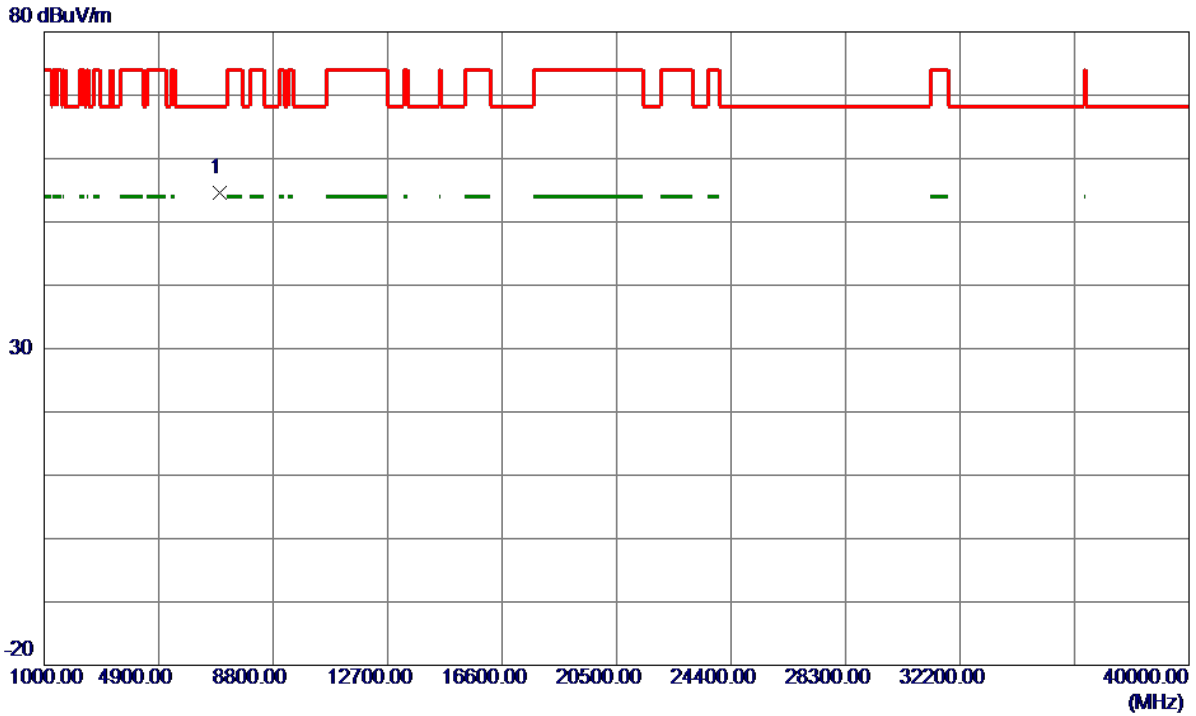


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6986.8280	43.46	11.19	54.65	68.30	-13.65	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240 MHz

Horizontal


130 dBuV/m

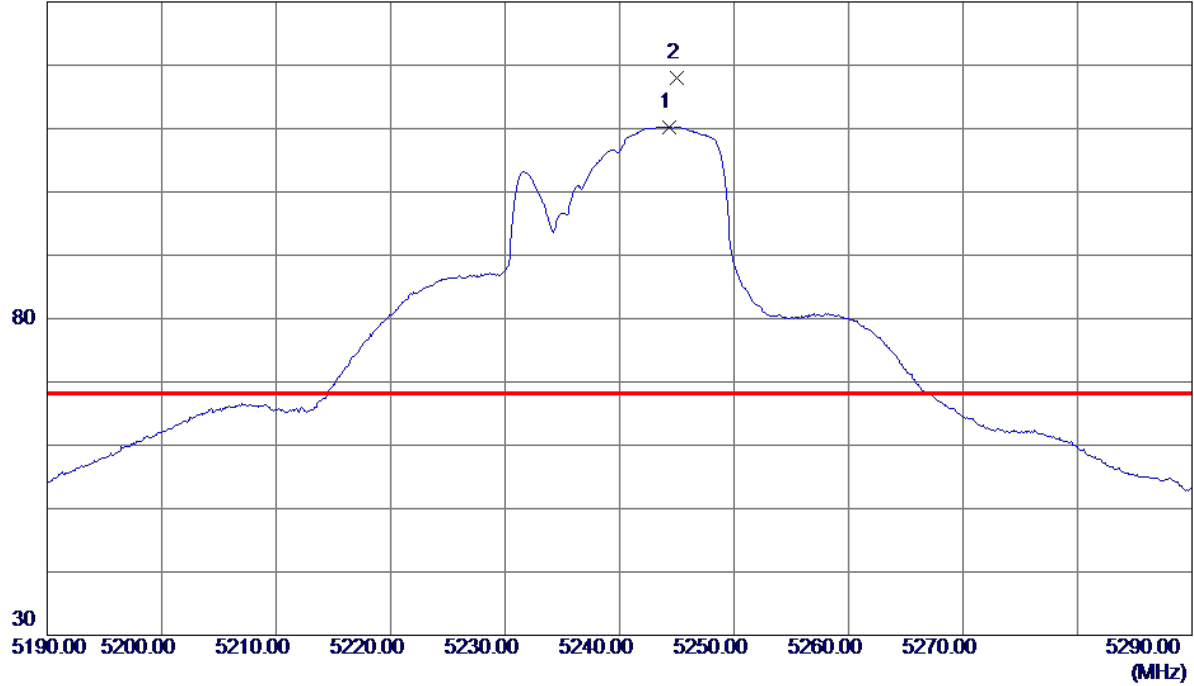

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5244.3000	88.39	21.86	110.25	999.00	-888.75	AVG	No Limit
2 *	5245.0000	96.18	21.86	118.04	68.30	49.74	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240 MHz

Horizontal

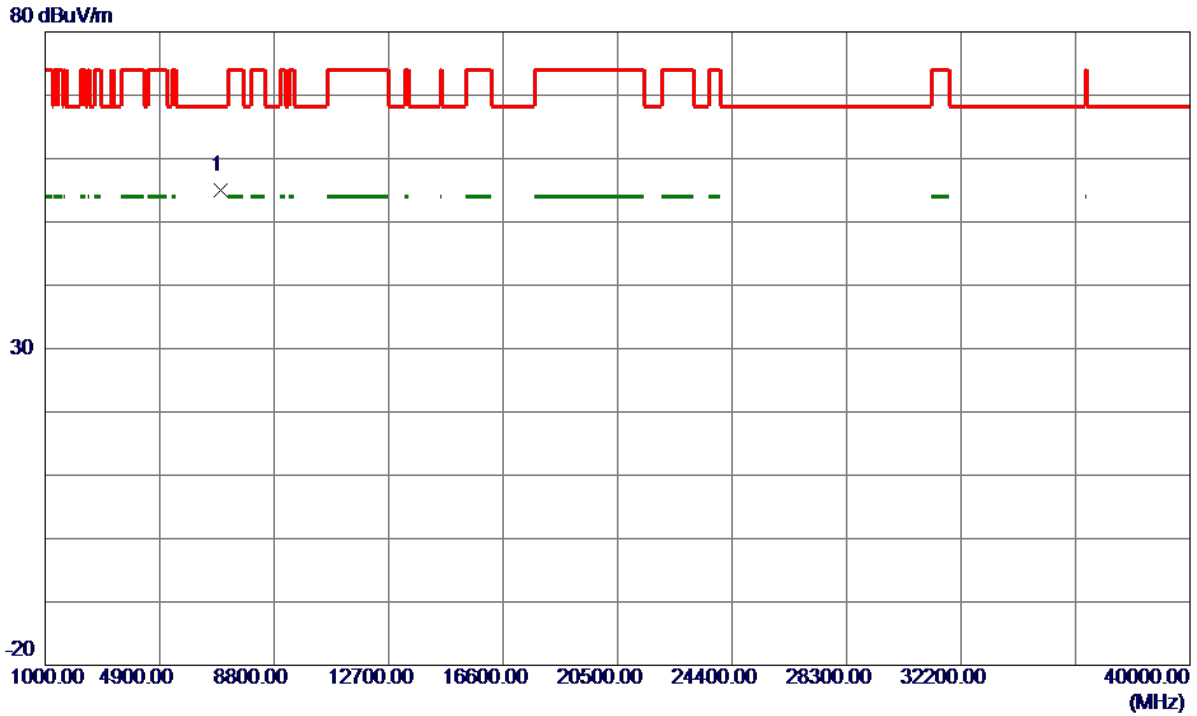


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6986.8580	43.84	11.19	55.03	68.30	-13.27	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Vertical


130 dBuV/m

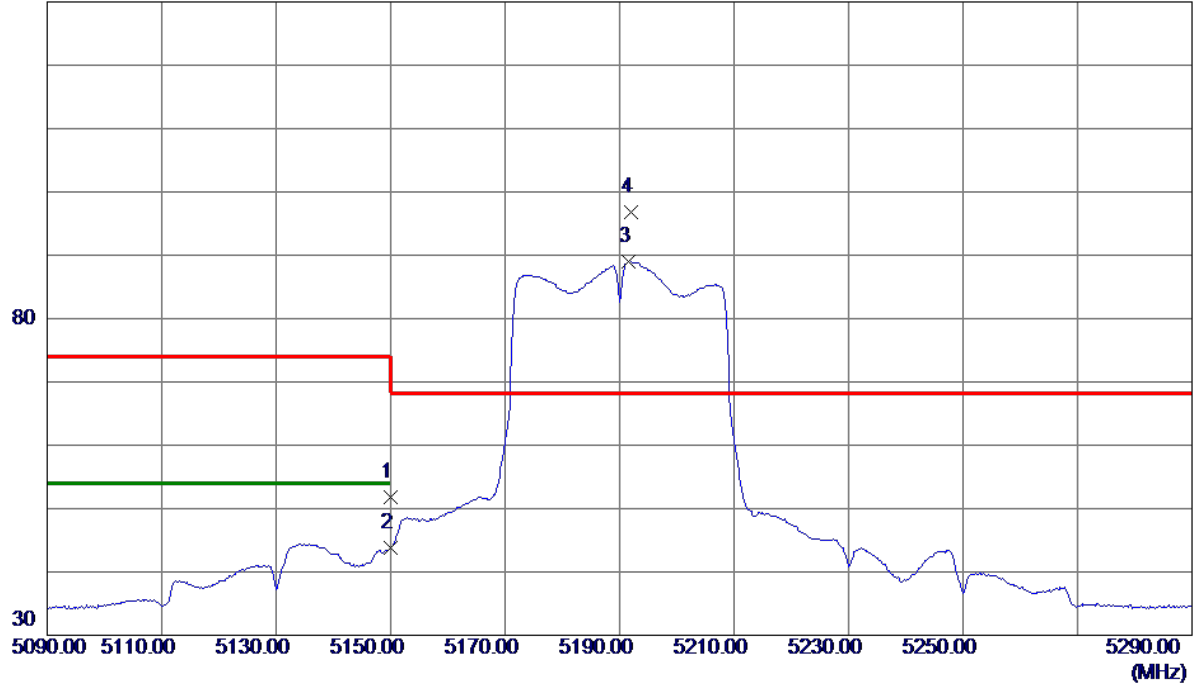

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	42.46	9.31	51.77	74.00	-22.23	Peak	
2	5150.0000	34.44	9.31	43.75	54.00	-10.25	AVG	
3	5191.6000	79.55	9.40	88.95	999.00	-910.05	AVG	No Limit
4 *	5192.0000	87.36	9.40	96.76	68.30	28.46	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Vertical

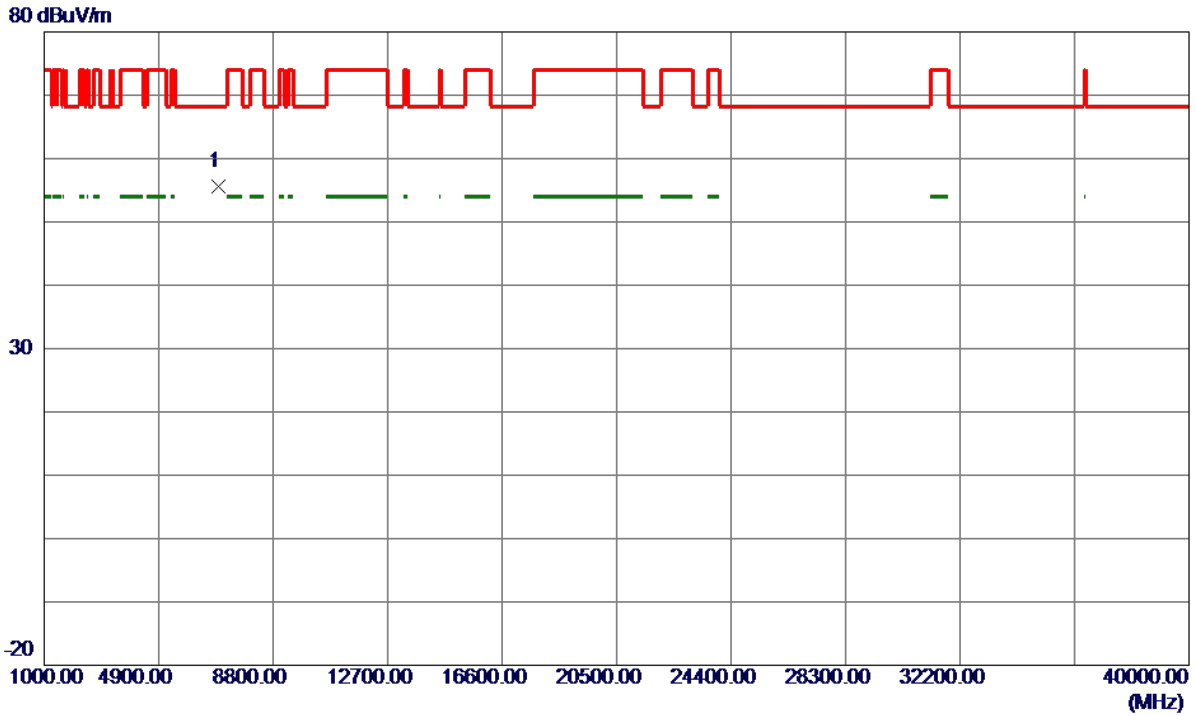


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6920.2120	44.58	11.05	55.63	68.30	-12.67	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Horizontal


130 dBuV/m

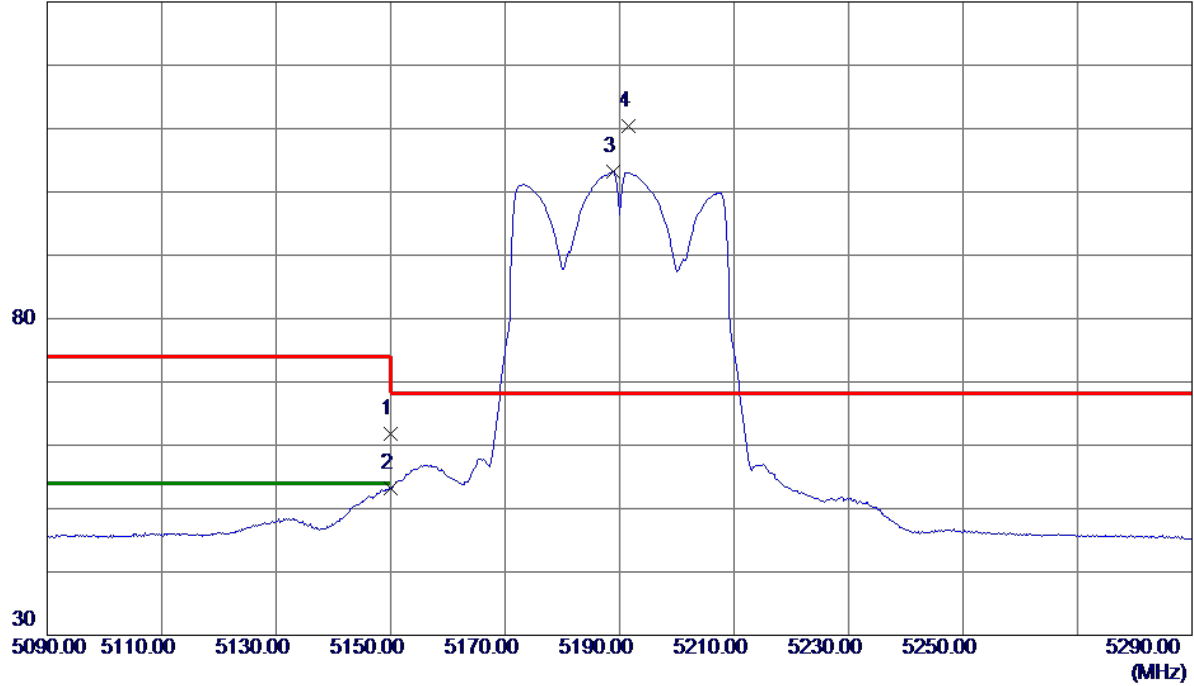

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	40.00	21.72	61.72	74.00	-12.28	Peak	
2	5150.0000	31.55	21.72	53.27	54.00	-0.73	AVG	
3	5188.8000	81.41	21.78	103.19	999.00	-895.81	AVG	No Limit
4 *	5191.6000	88.60	21.78	110.38	68.30	42.08	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Horizontal

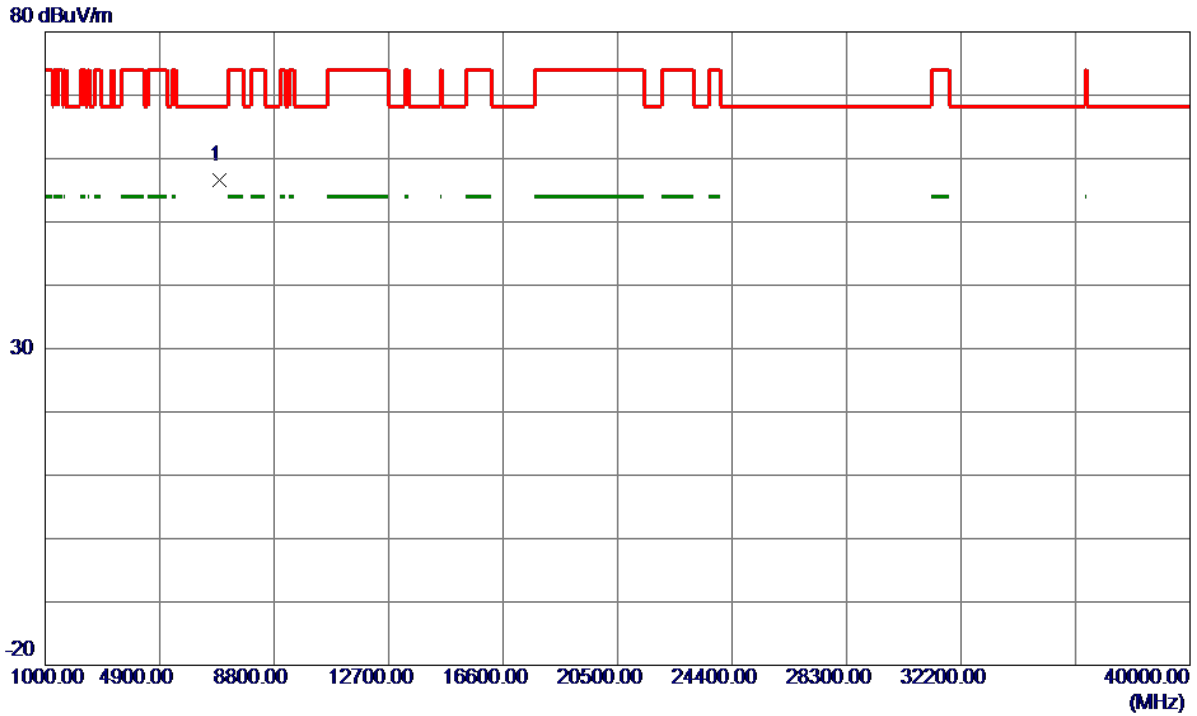

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6920.0260	45.52	11.05	56.57	68.30	-11.73	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Vertical


130 dBuV/m



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5232.4000	90.55	9.49	100.04	68.30	31.74	Peak	No Limit
2	5233.0000	82.92	9.49	92.41	999.00	-906.59	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Vertical

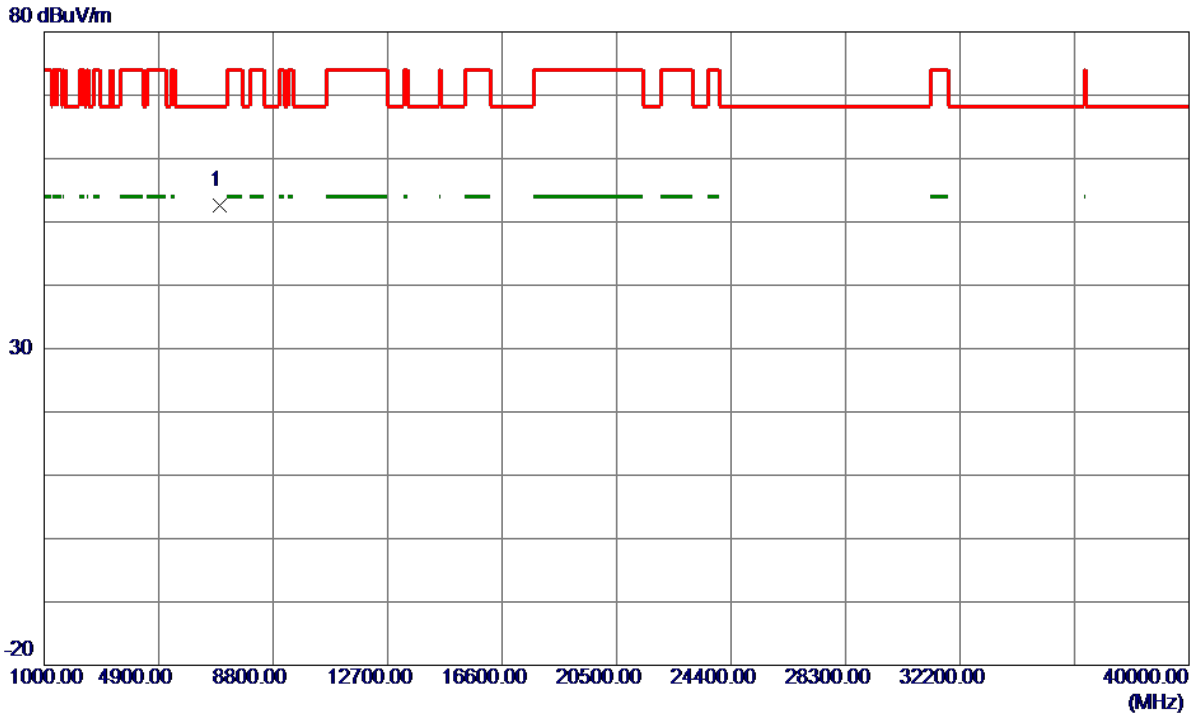

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6973.4840	41.44	11.16	52.60	68.30	-15.70	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Horizontal


130 dBuV/m



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	45.94	14.32	60.26	74.00	-13.74	Peak	
2	5150.0000	38.24	14.32	52.56	54.00	-1.44	AVG	
3	5233.1250	93.12	14.54	107.66	999.00	-891.34	AVG	No Limit
4 *	5233.6250	100.63	14.55	115.18	68.30	46.88	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz

Horizontal

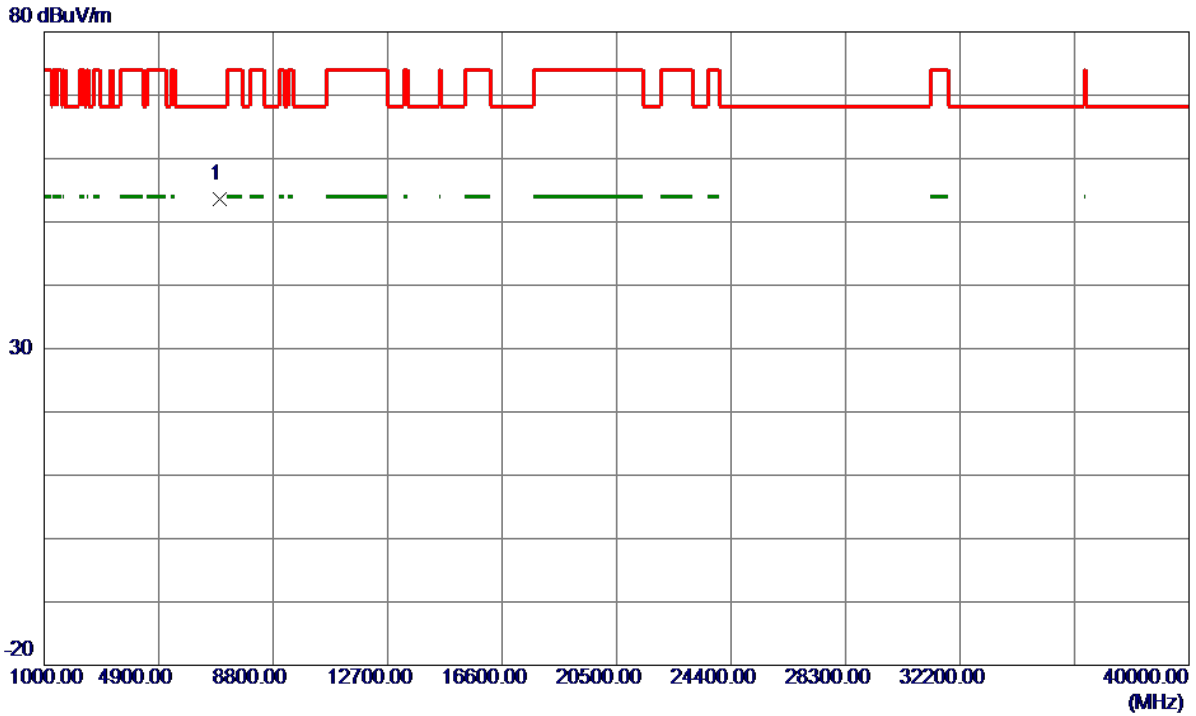


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6973.4220	42.41	11.16	53.57	68.30	-14.73	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Vertical


130 dBuV/m

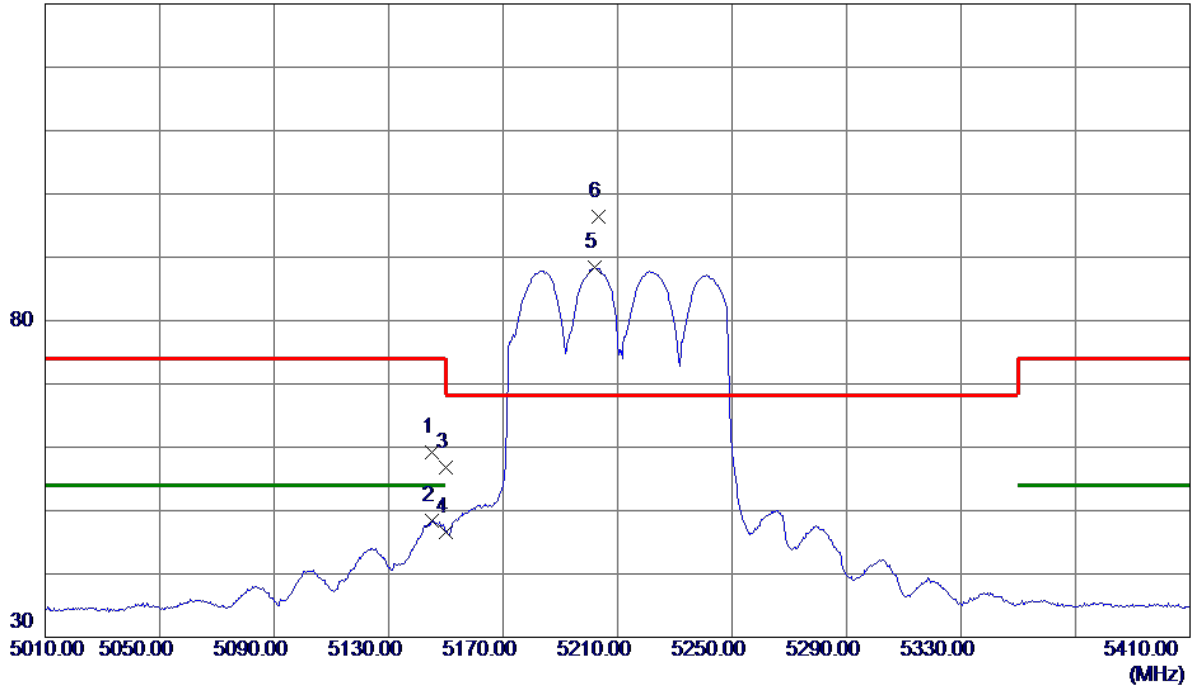

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5145.2000	49.86	9.30	59.16	74.00	-14.84	Peak	
2	5145.2000	39.03	9.30	48.33	54.00	-5.67	AVG	
3	5150.0000	47.44	9.31	56.75	74.00	-17.25	Peak	
4	5150.0000	37.36	9.31	46.67	54.00	-7.33	AVG	
5	5202.0000	78.89	9.42	88.31	999.00	-910.69	AVG	No Limit
6 *	5203.2000	87.04	9.43	96.47	68.30	28.17	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Vertical

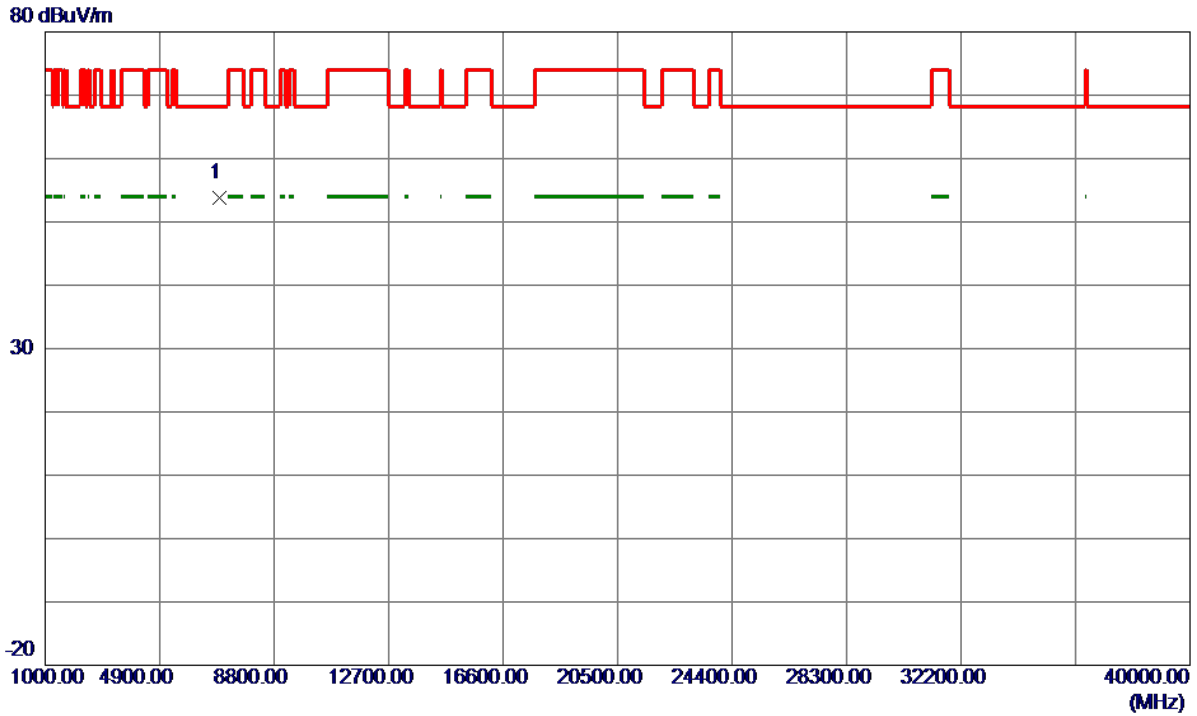

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6946.7400	42.64	11.11	53.75	68.30	-14.55	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Horizontal


130 dBuV/m



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	40.41	21.72	62.13	74.00	-11.87	Peak	
2	5150.0000	31.47	21.72	53.19	54.00	-0.81	AVG	
3	5212.0000	75.79	21.81	97.60	999.00	-901.40	AVG	No Limit
4 *	5212.4000	83.75	21.81	105.56	68.30	37.26	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz


Horizontal

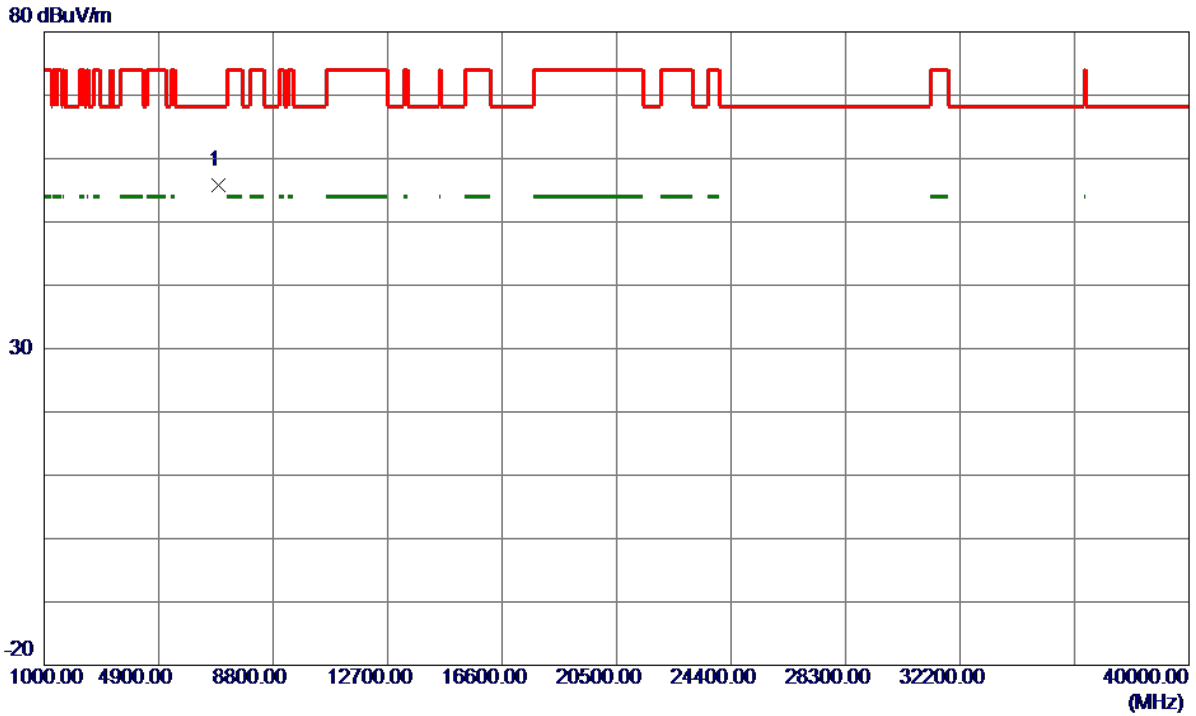

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	6946.6300	44.73	11.11	55.84	68.30	-12.46	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745 MHz


Vertical

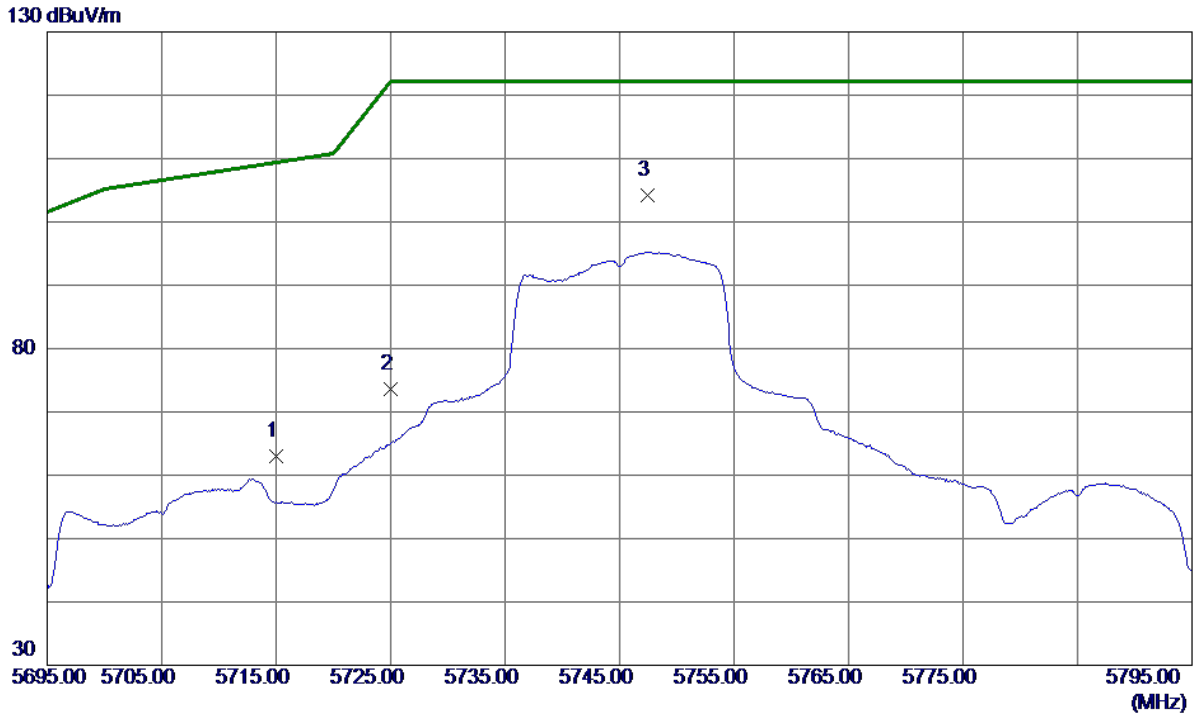

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	52.30	10.67	62.97	109.40	-46.43	Peak	
2	5725.0000	62.99	10.70	73.69	122.20	-48.51	Peak	
3 *	5747.4000	93.44	10.77	104.21	122.20	-17.99	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745 MHz

Vertical

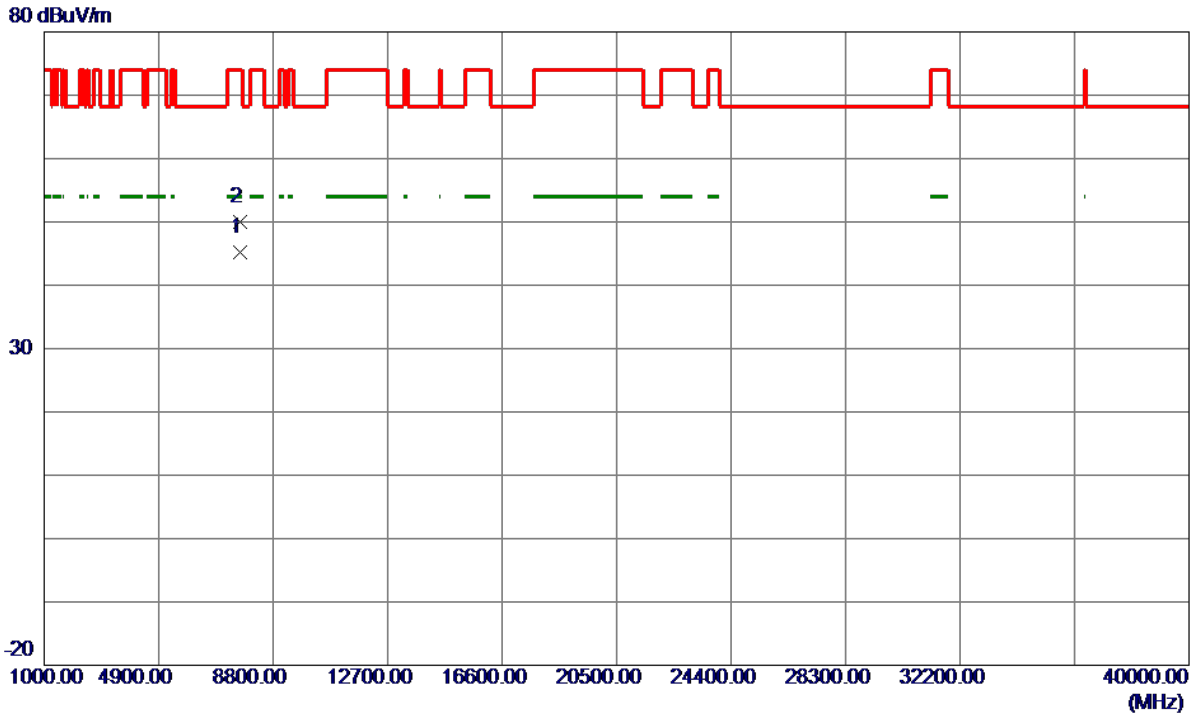


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7660.0580	32.88	12.36	45.24	54.00	-8.76	AVG	
2	7660.1800	37.69	12.36	50.05	74.00	-23.95	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745 MHz

Horizontal


130 dBuV/m

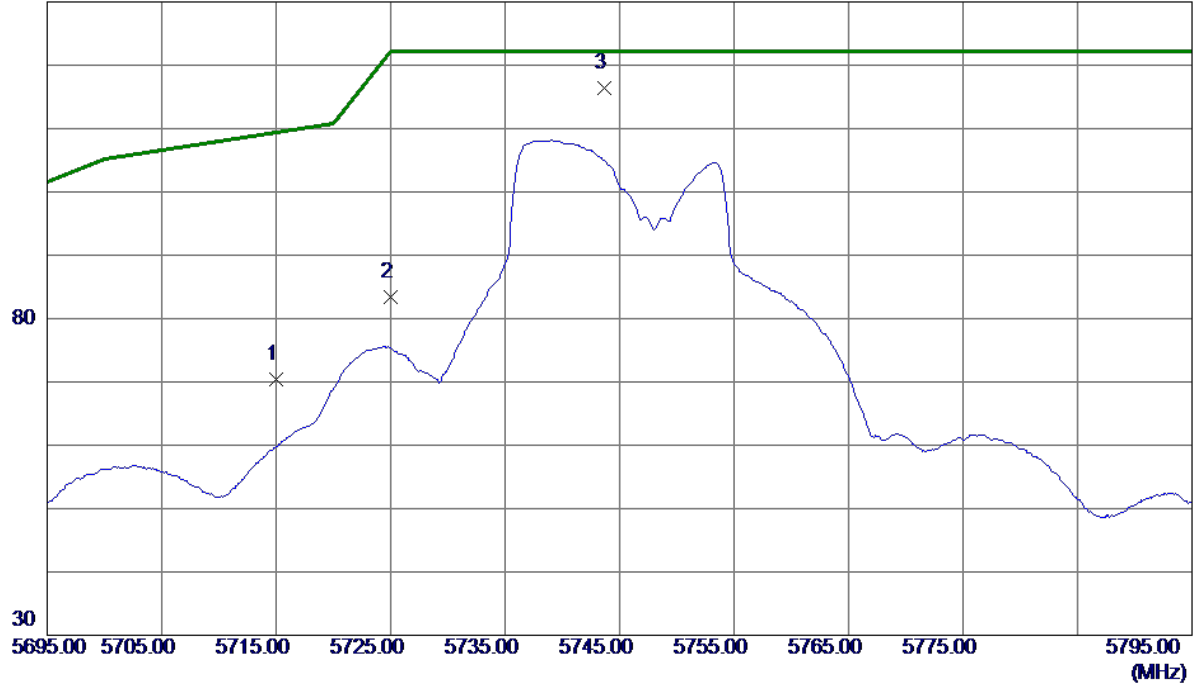

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	47.87	22.48	70.35	109.40	-39.05	Peak	
2	5725.0000	60.98	22.49	83.47	122.20	-38.73	Peak	
3 *	5743.7000	93.89	22.51	116.40	122.20	-5.80	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745 MHz

Horizontal

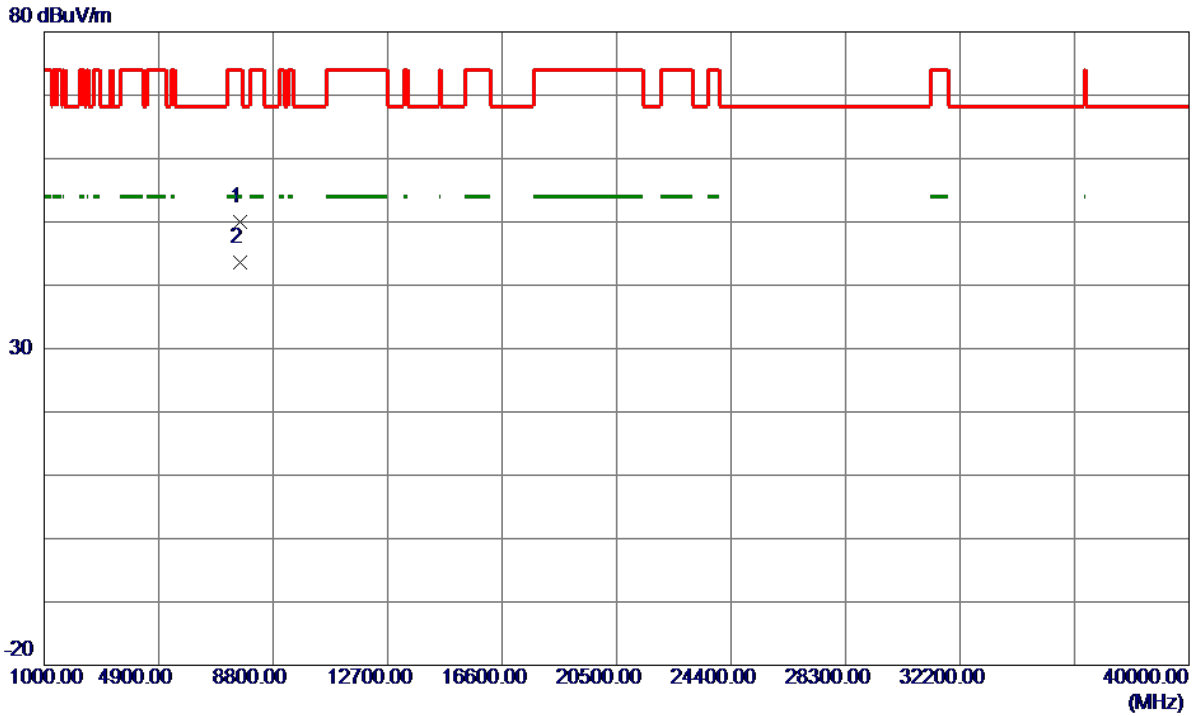


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7660.0220	37.69	12.36	50.05	74.00	-23.95	Peak	
2 *	7660.0900	31.20	12.36	43.56	54.00	-10.44	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785 MHz

Vertical


130 dBuV/m

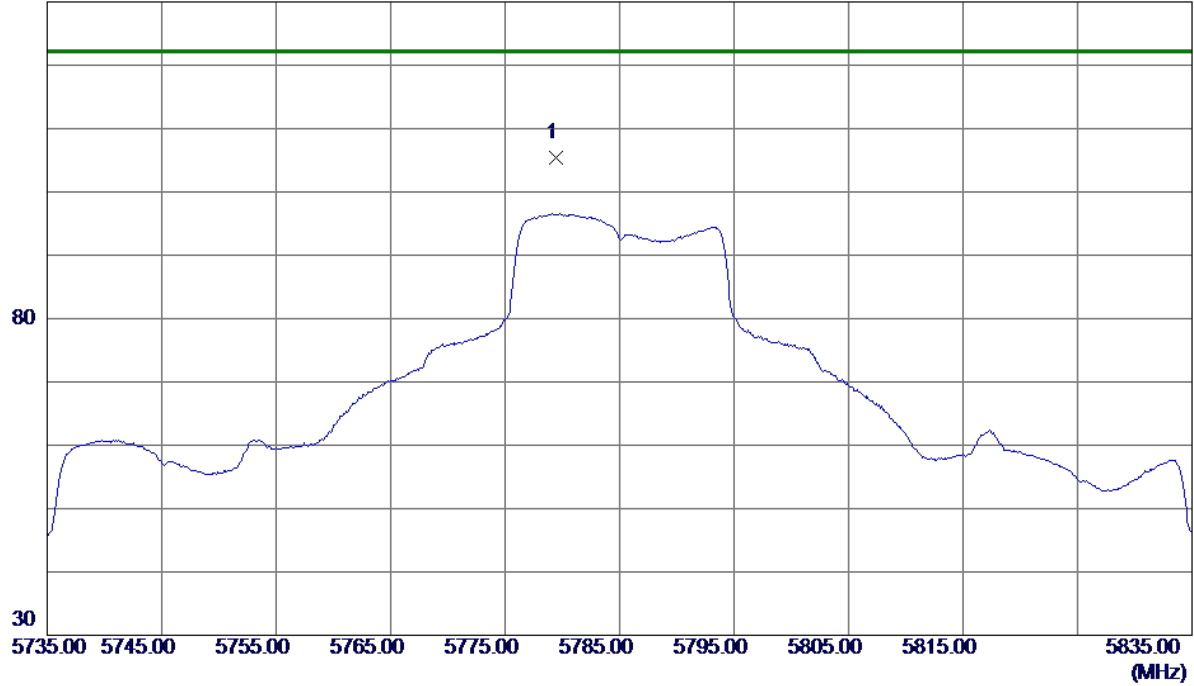

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5779.4000	94.61	10.86	105.47	122.20	-16.73	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785 MHz


Vertical

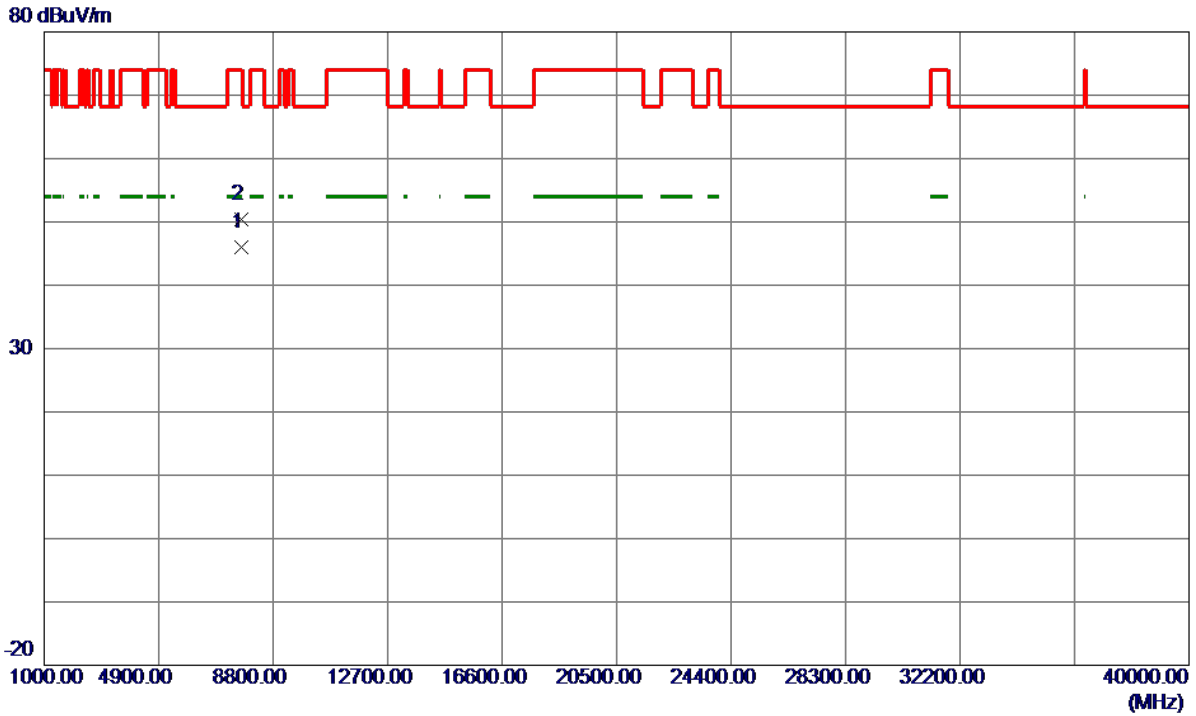

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7713.4000	33.72	12.34	46.06	54.00	-7.94	AVG	
2	7713.4400	38.11	12.34	50.45	74.00	-23.55	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785 MHz


Horizontal

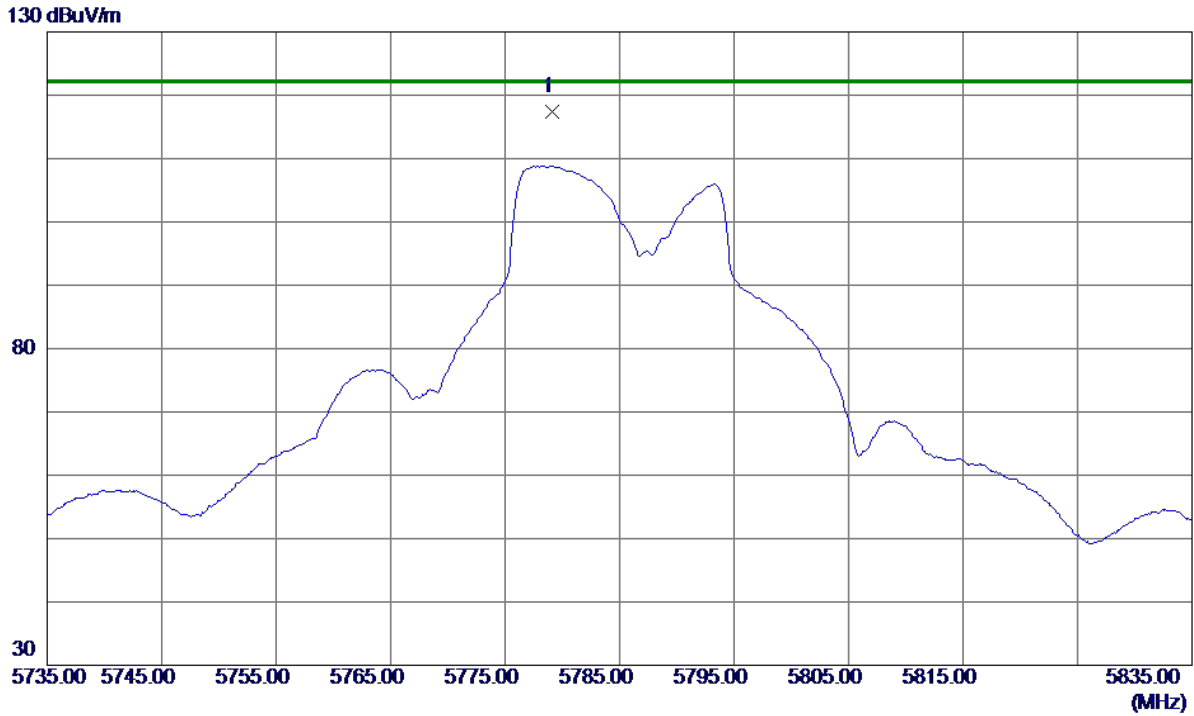

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5779.1000	94.93	22.55	117.48	122.20	-4.72	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785 MHz


Horizontal

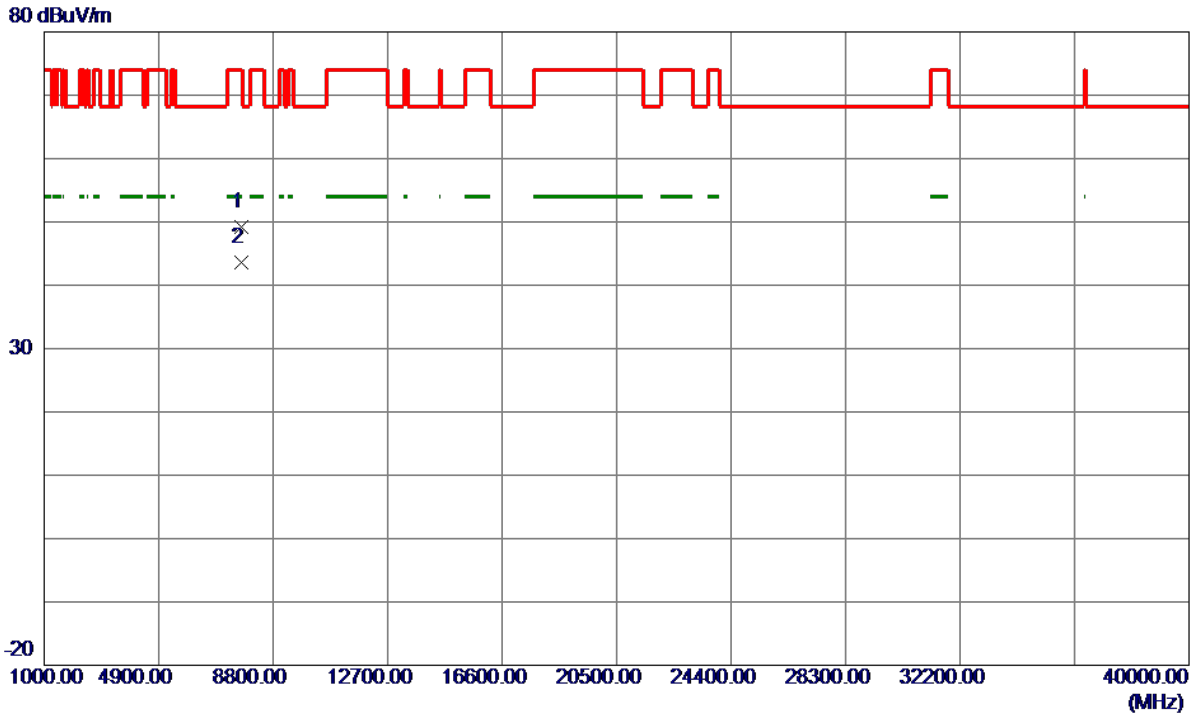

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7713.3160	36.87	12.34	49.21	74.00	-24.79	Peak	
2 *	7713.4260	31.34	12.34	43.68	54.00	-10.32	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825 MHz


Vertical

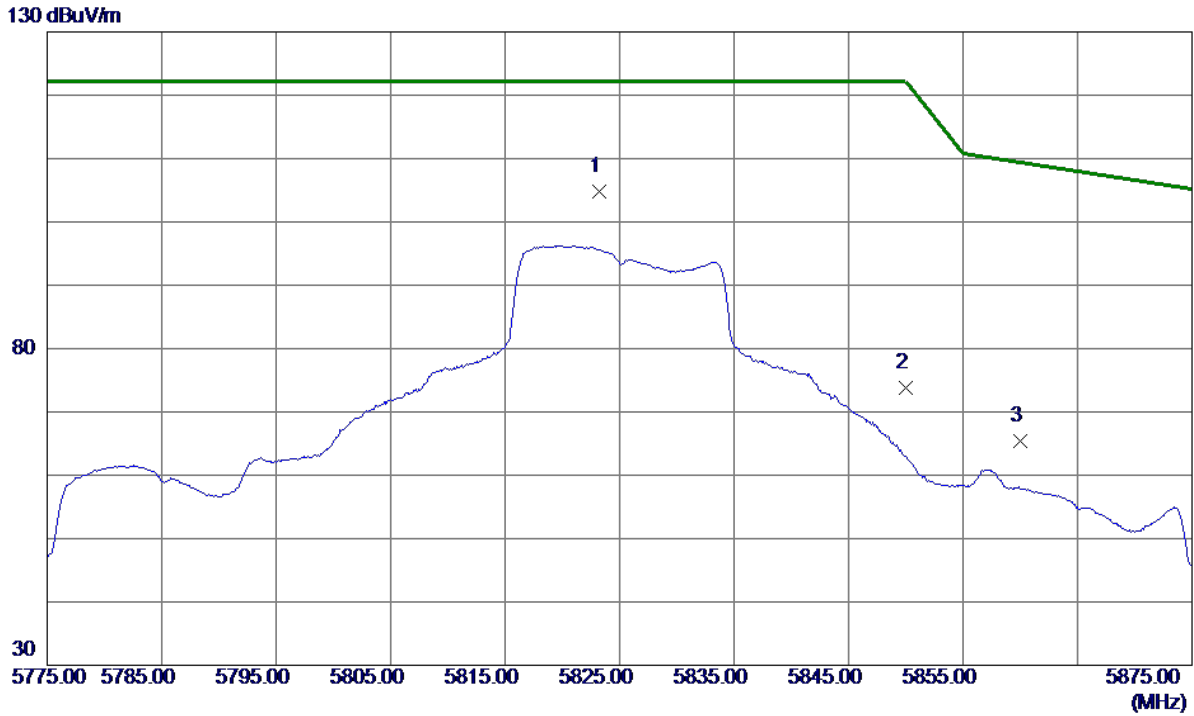

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5823.2000	93.76	10.99	104.75	122.20	-17.45	Peak	No Limit
2	5850.0000	62.73	11.06	73.79	122.20	-48.41	Peak	
3	5860.0000	54.31	11.09	65.40	109.40	-44.00	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825 MHz


Vertical

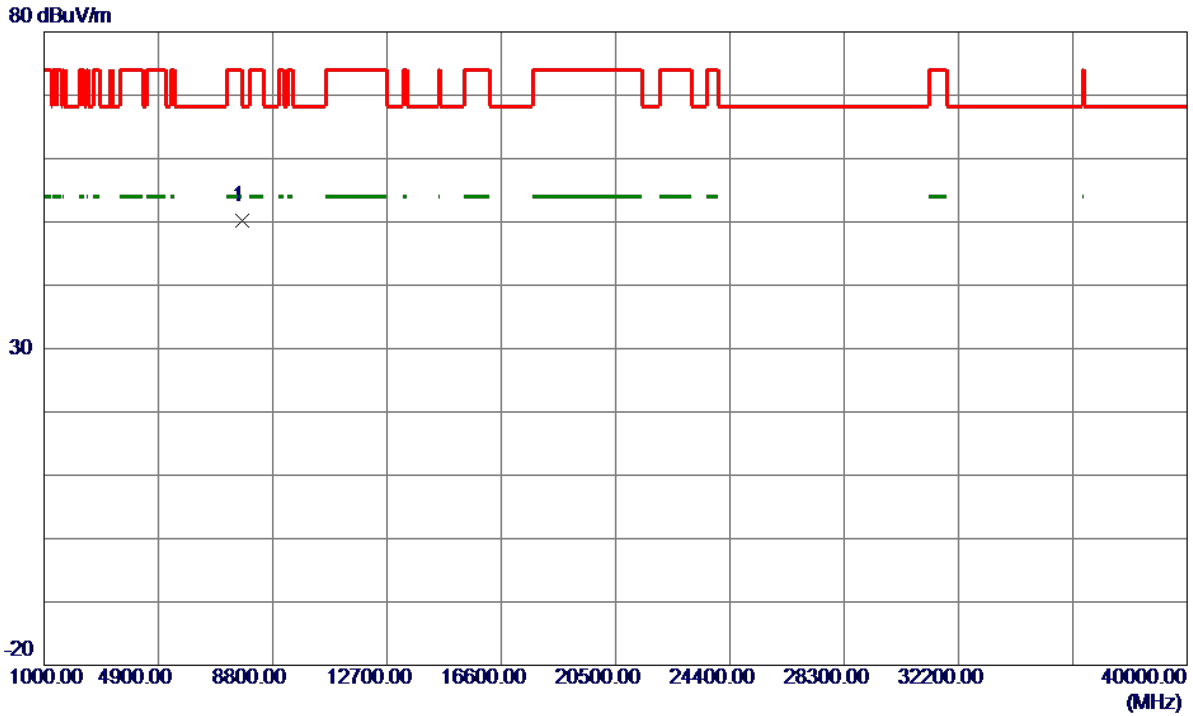

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7766.7500	37.84	12.31	50.15	68.30	-18.15	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825 MHz


Horizontal

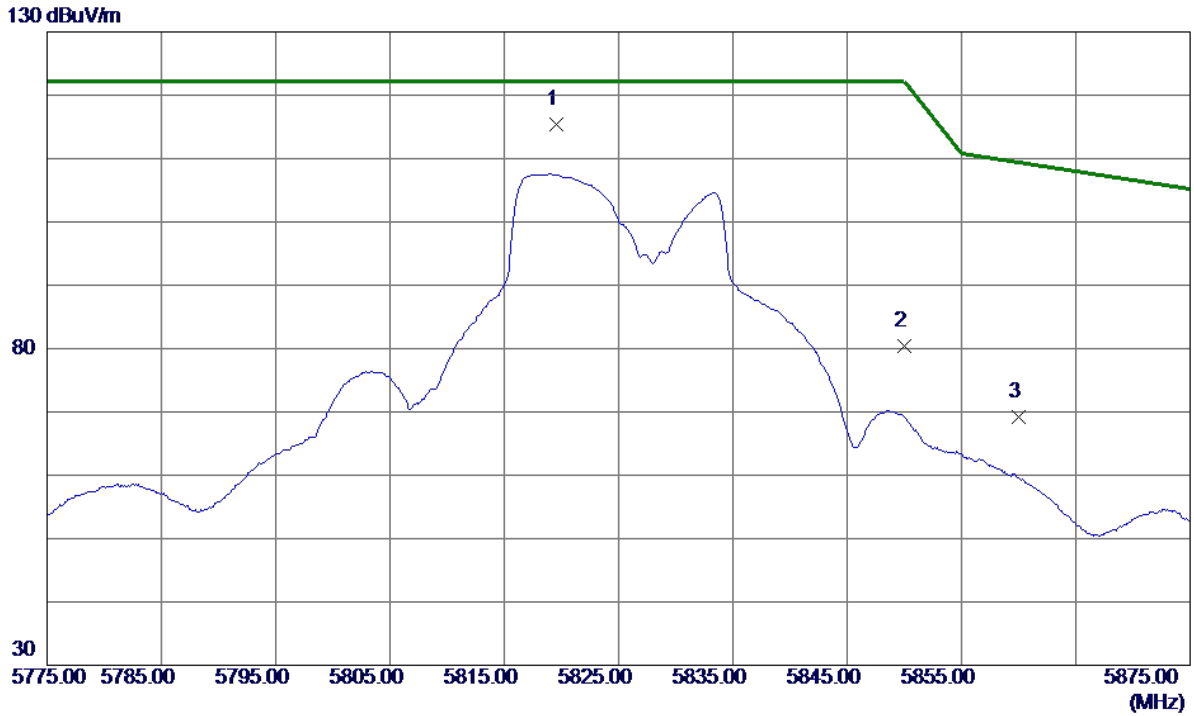

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5819.6000	92.78	22.60	115.38	122.20	-6.82	Peak	No Limit
2	5850.0000	57.76	22.63	80.39	122.20	-41.81	Peak	
3	5860.0000	46.62	22.64	69.26	109.40	-40.14	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825 MHz

Horizontal

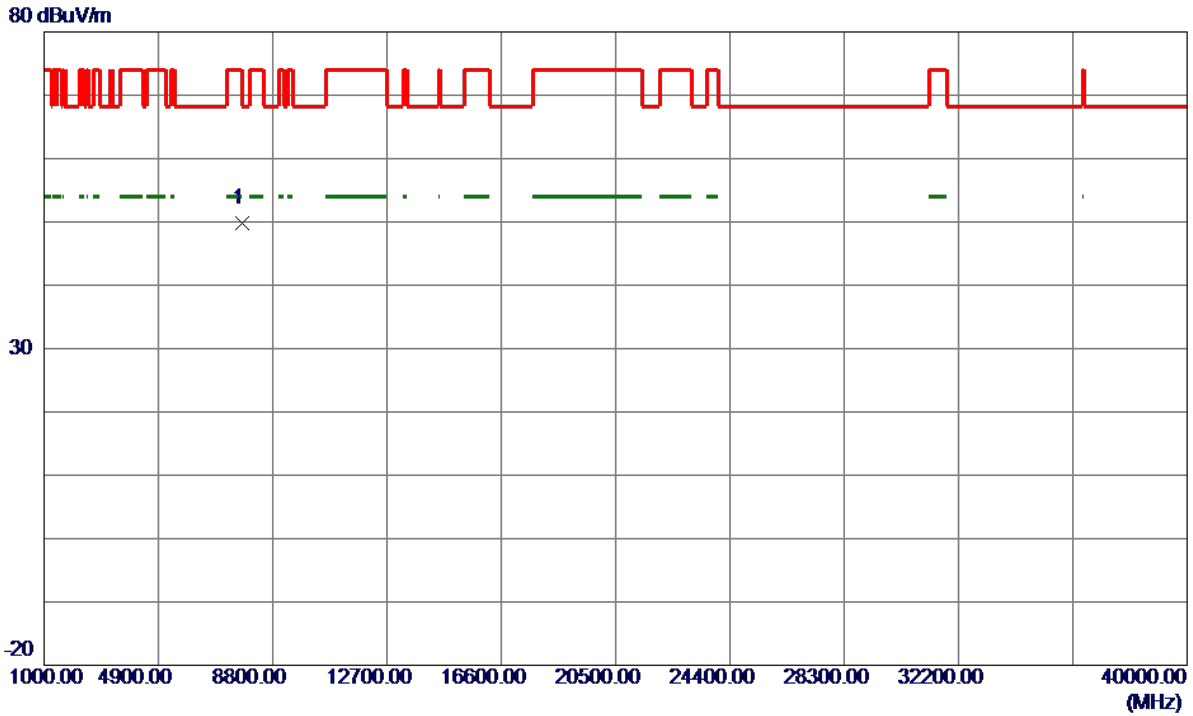


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7766.8380	37.47	12.31	49.78	68.30	-18.52	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz

Vertical


130 dBuV/m

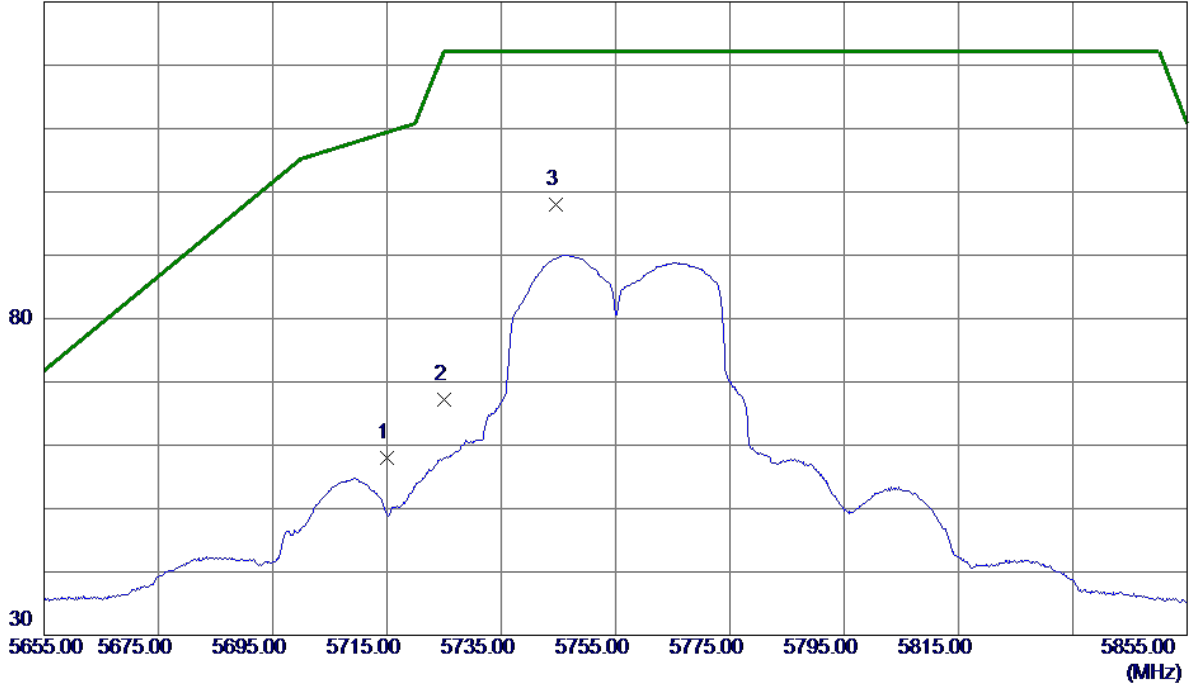

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	47.42	10.67	58.09	109.40	-51.31	Peak	
2	5725.0000	56.51	10.70	67.21	122.20	-54.99	Peak	
3 *	5744.6000	87.18	10.76	97.94	122.20	-24.26	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Vertical

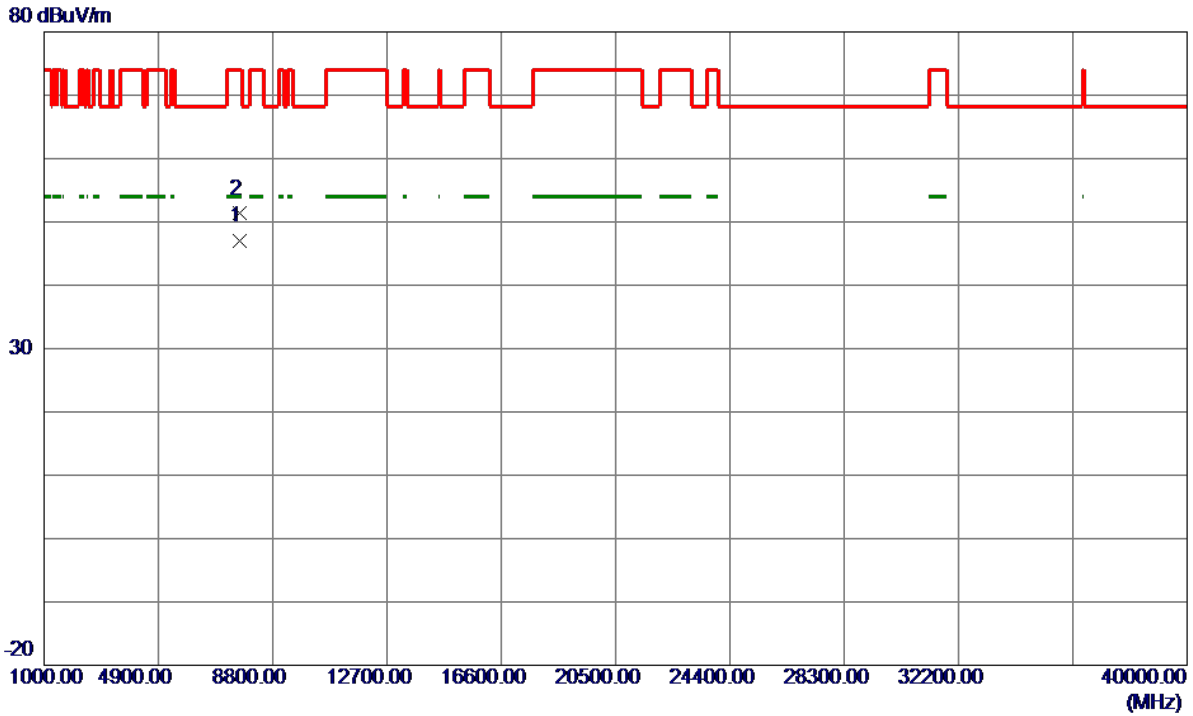

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7673.3860	34.73	12.36	47.09	54.00	-6.91	AVG	
2	7673.5240	38.94	12.36	51.30	74.00	-22.70	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Horizontal

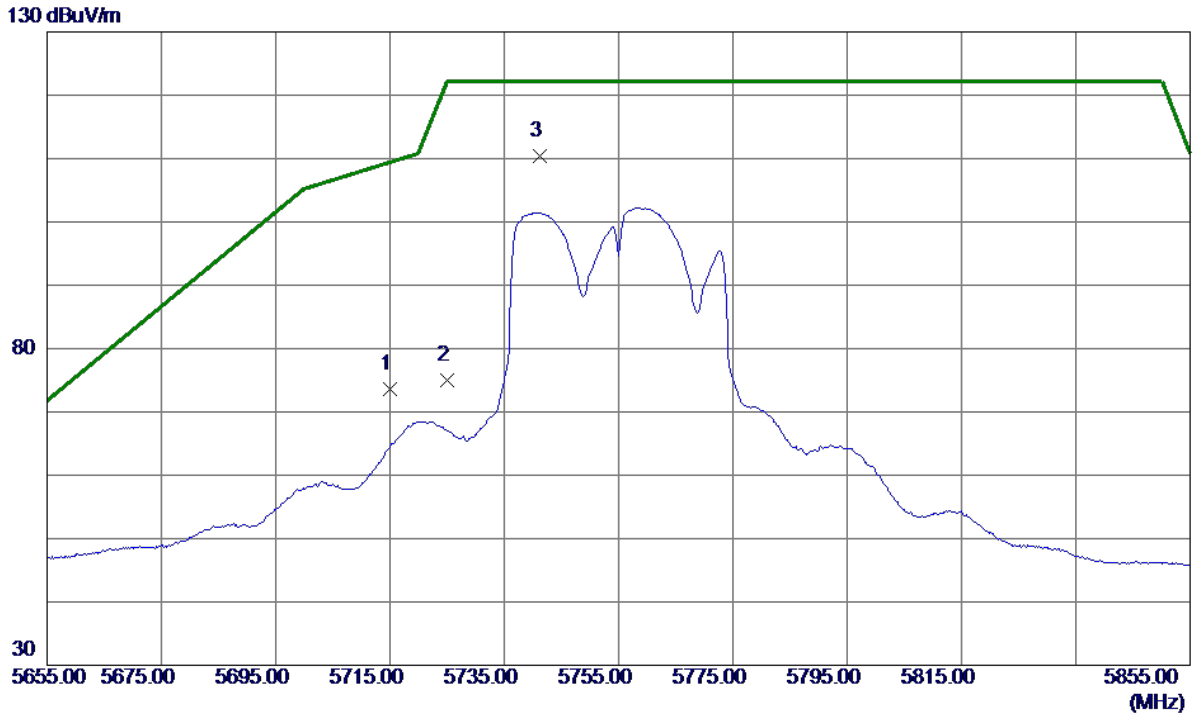

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	51.18	22.48	73.66	109.40	-35.74	Peak	
2	5725.0000	52.55	22.49	75.04	122.20	-47.16	Peak	
3 *	5741.2000	87.92	22.51	110.43	122.20	-11.77	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Horizontal

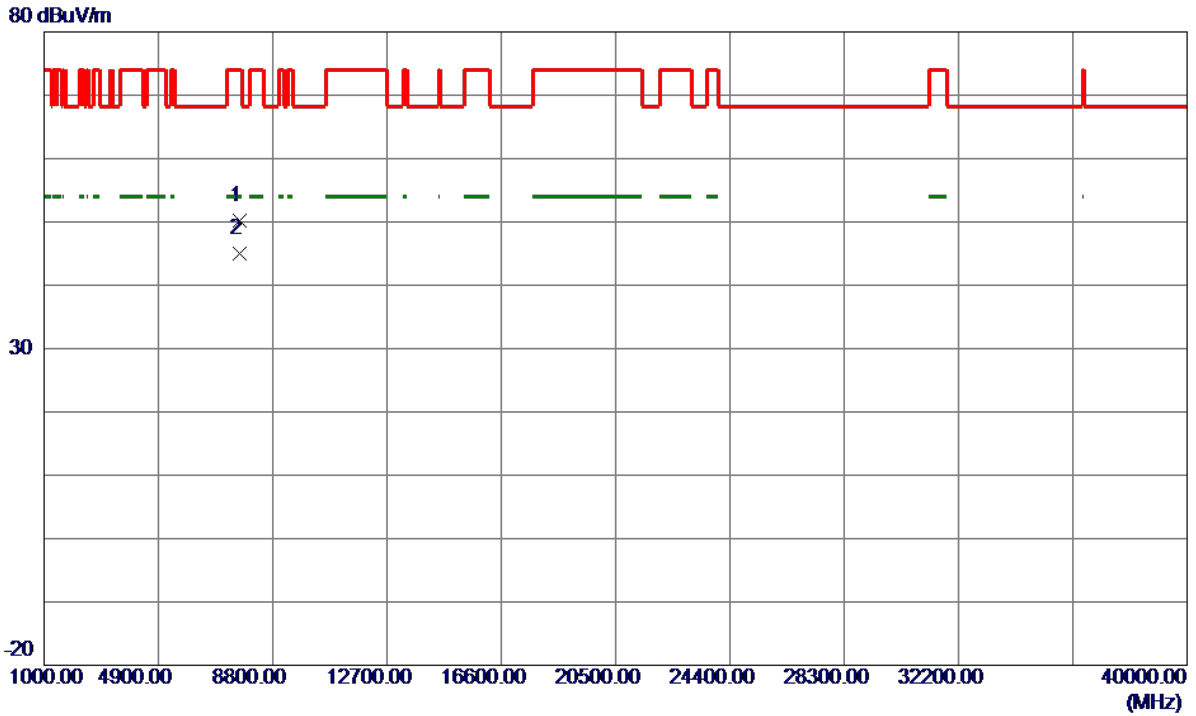

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7673.3780	37.76	12.36	50.12	74.00	-23.88	Peak	
2 *	7673.4140	32.70	12.36	45.06	54.00	-8.94	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz


Vertical

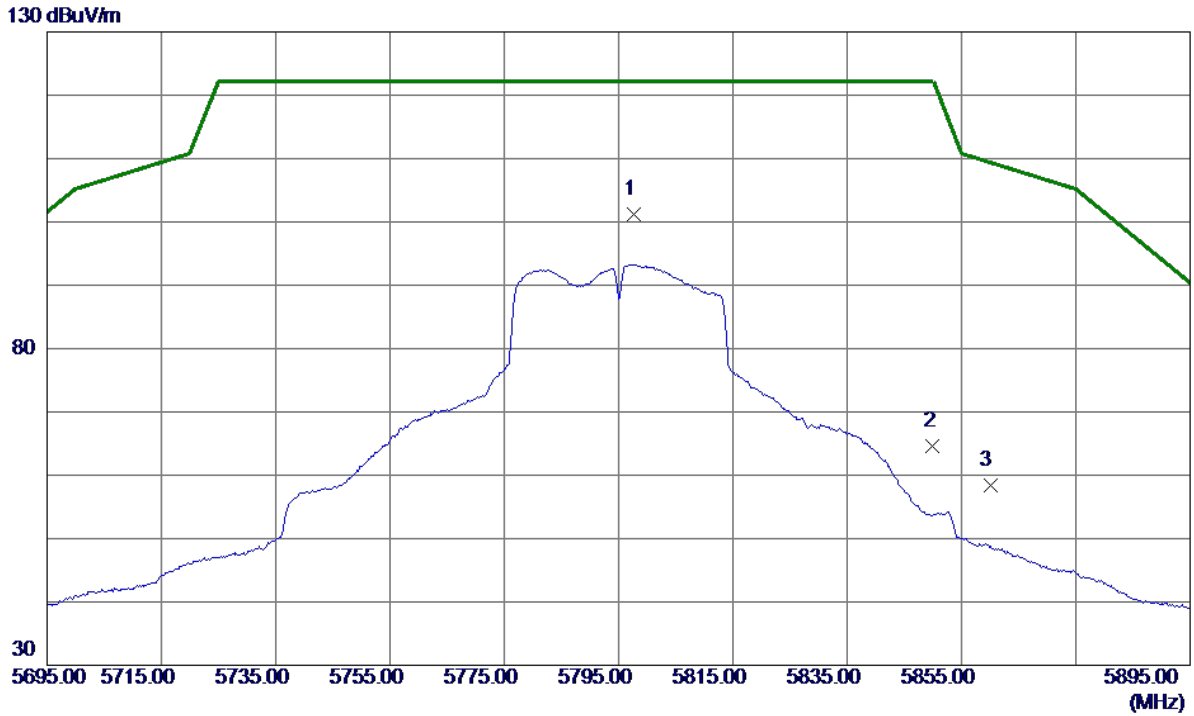

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5797.6000	90.23	10.91	101.14	122.20	-21.06	Peak	No Limit
2	5850.0000	53.53	11.06	64.59	122.20	-57.61	Peak	
3	5860.0000	47.36	11.09	58.45	109.40	-50.95	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz


Vertical

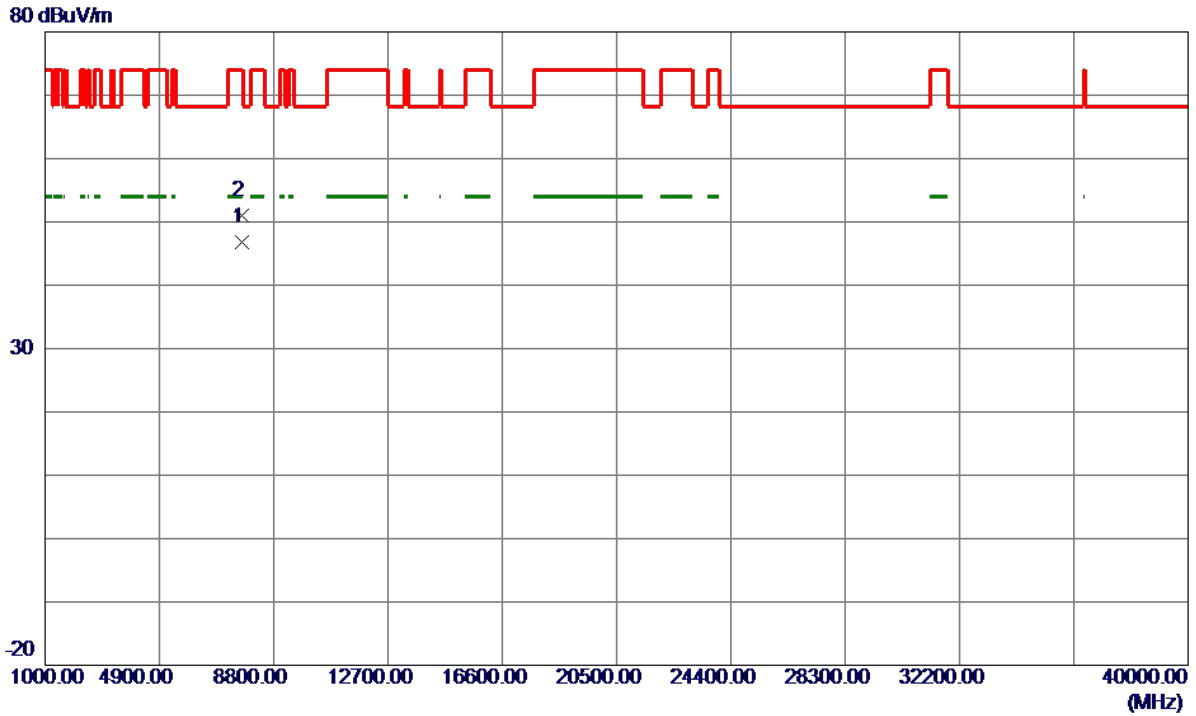

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7726.7360	34.53	12.33	46.86	54.00	-7.14	AVG	
2	7726.7780	38.61	12.33	50.94	74.00	-23.06	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz


Horizontal

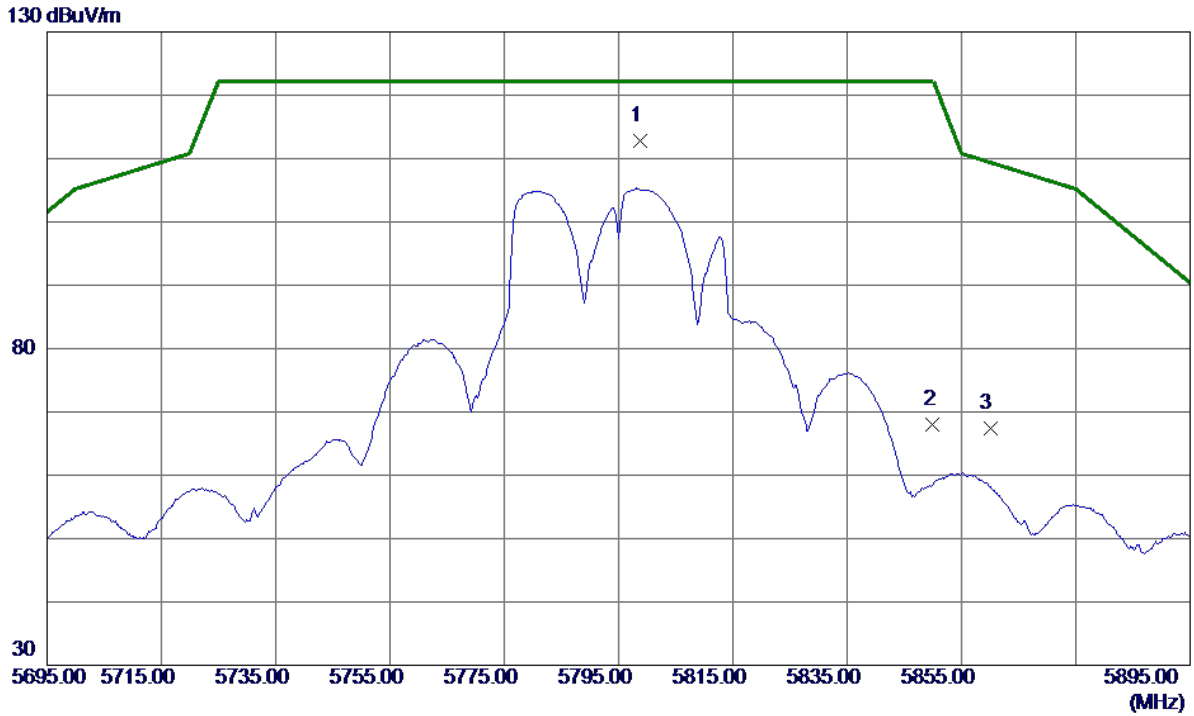

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5798.8000	90.23	22.57	112.80	122.20	-9.40	Peak	No Limit
2	5850.0000	45.41	22.63	68.04	122.20	-54.16	Peak	
3	5860.0000	44.81	22.64	67.45	109.40	-41.95	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz

Horizontal

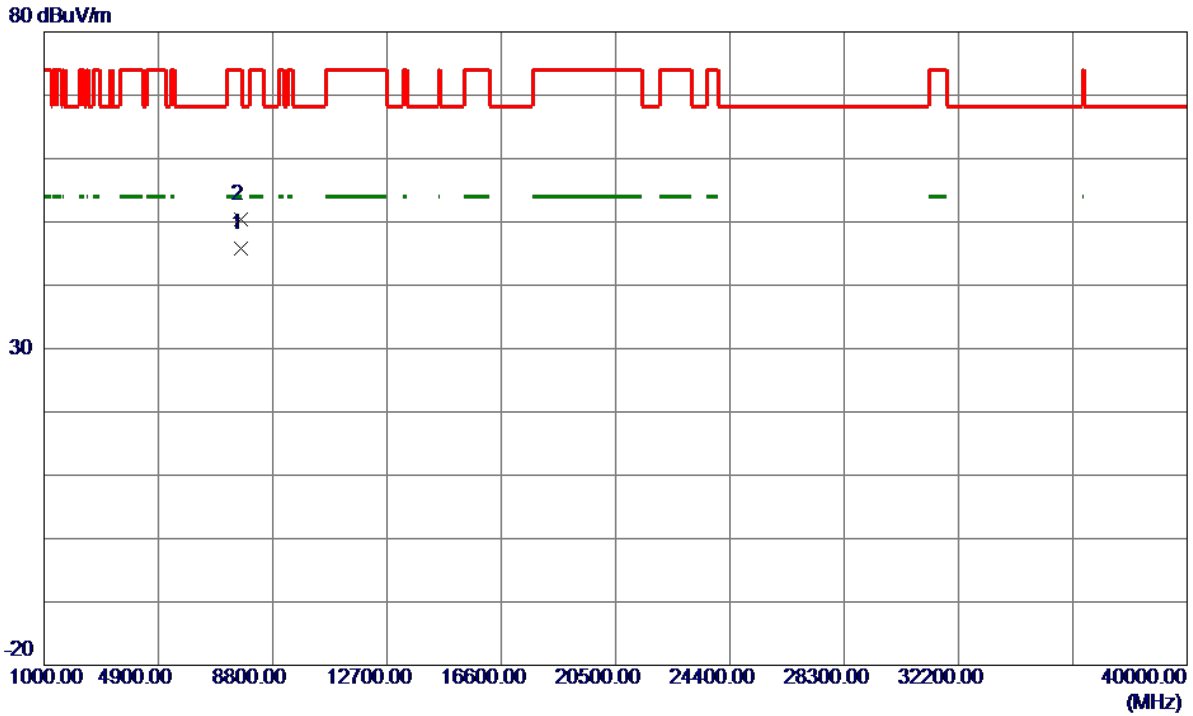


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7726.7580	33.43	12.33	45.76	54.00	-8.24	AVG	
2	7726.8700	38.07	12.33	50.40	74.00	-23.60	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Vertical


130 dBuV/m

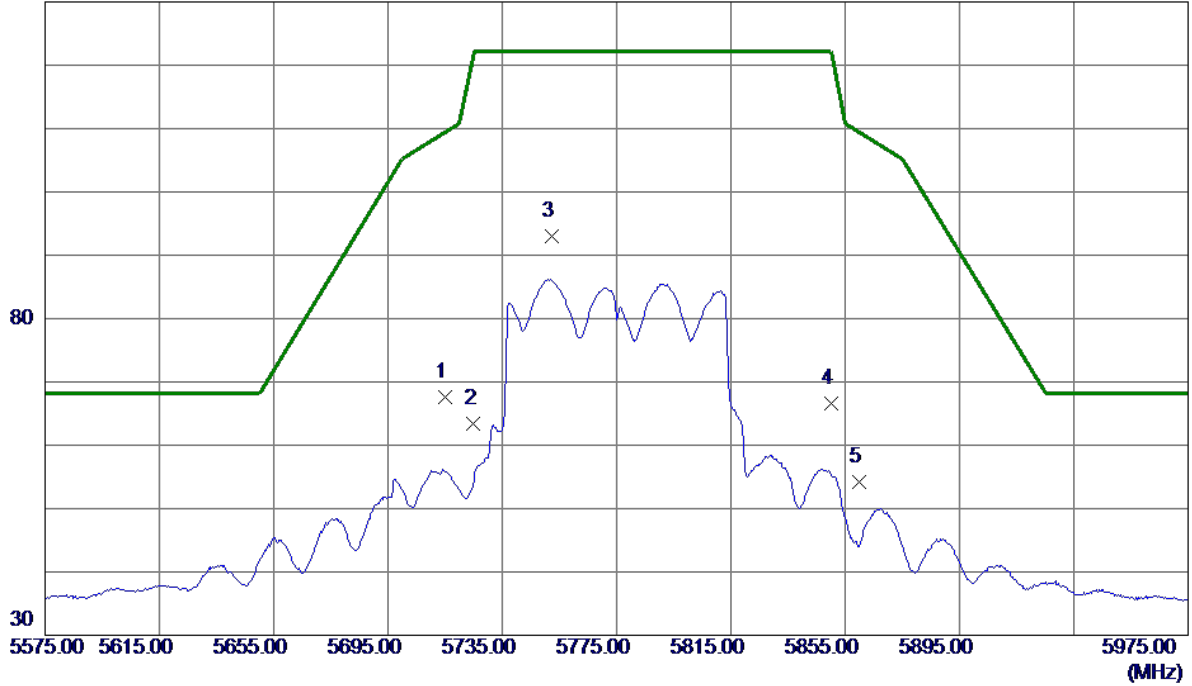

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	56.88	10.67	67.55	109.40	-41.85	Peak	
2	5725.0000	52.73	10.70	63.43	122.20	-58.77	Peak	
3 *	5752.2000	82.31	10.78	93.09	122.20	-29.11	Peak	No Limit
4	5850.0000	55.49	11.06	66.55	122.20	-55.65	Peak	
5	5860.0000	43.05	11.09	54.14	109.40	-55.26	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


Vertical

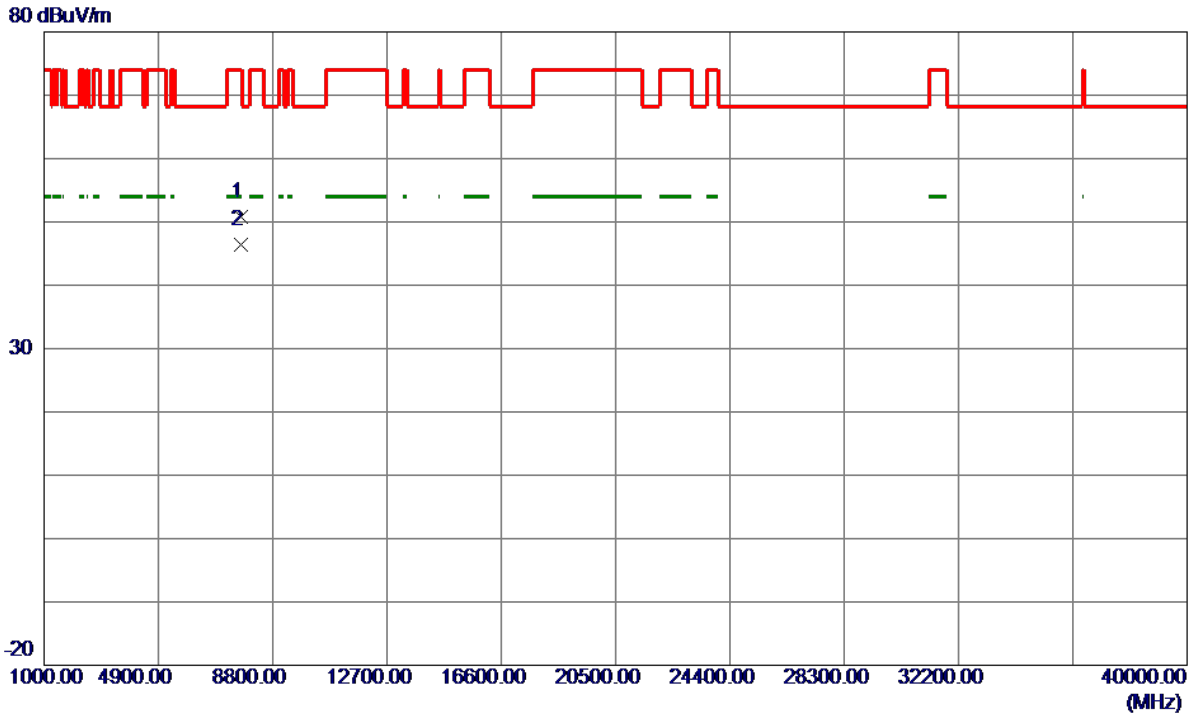

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7699.9640	38.45	12.34	50.79	74.00	-23.21	Peak	
2 *	7700.0760	34.03	12.34	46.37	54.00	-7.63	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


Horizontal

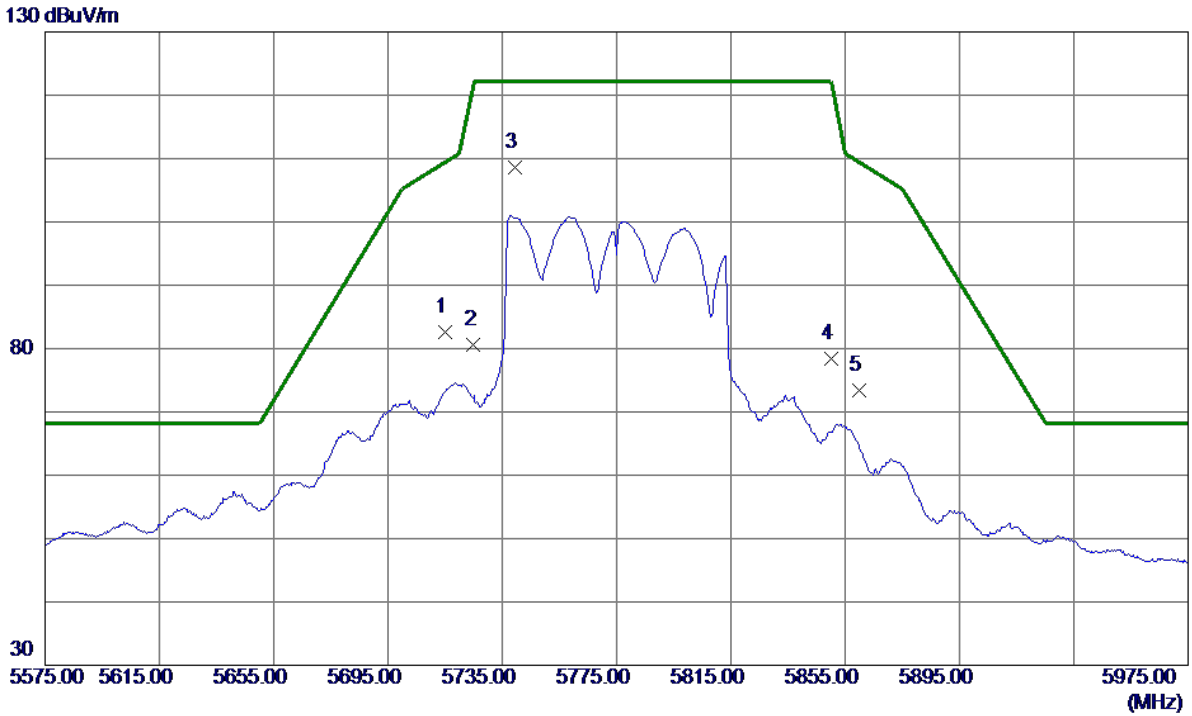

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	60.15	22.48	82.63	109.40	-26.77	Peak	
2	5725.0000	58.20	22.49	80.69	122.20	-41.51	Peak	
3 *	5739.4000	86.08	22.51	108.59	122.20	-13.61	Peak	No Limit
4	5850.0000	55.73	22.63	78.36	122.20	-43.84	Peak	
5	5860.0000	50.68	22.64	73.32	109.40	-36.08	Peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Horizontal

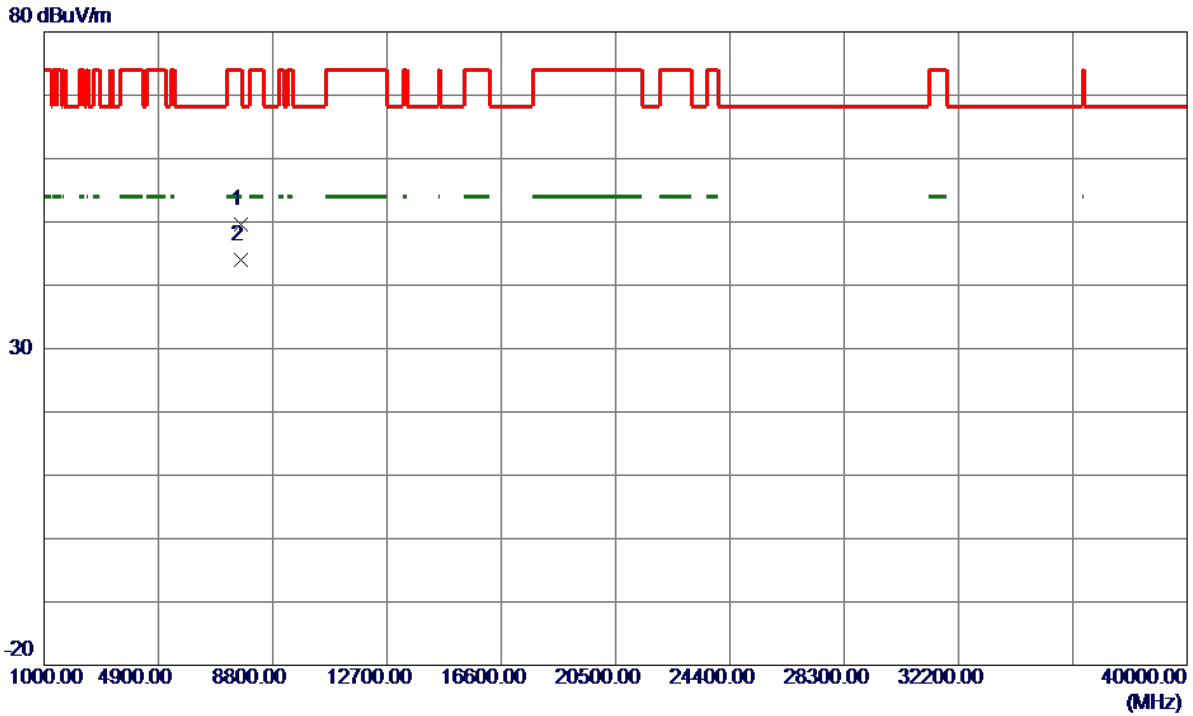

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7700.0500	37.24	12.34	49.58	74.00	-24.42	Peak	
2 *	7700.0500	31.65	12.34	43.99	54.00	-10.01	AVG	

TX A Mode_DUTY CYCLE

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 2.040 msec

T_{Total} : 2.110 msec

Duty cycle: 96.68%

Duty Factor = $10 \log(1/Duty \text{ cycle})$

Duty Factor = 0.15

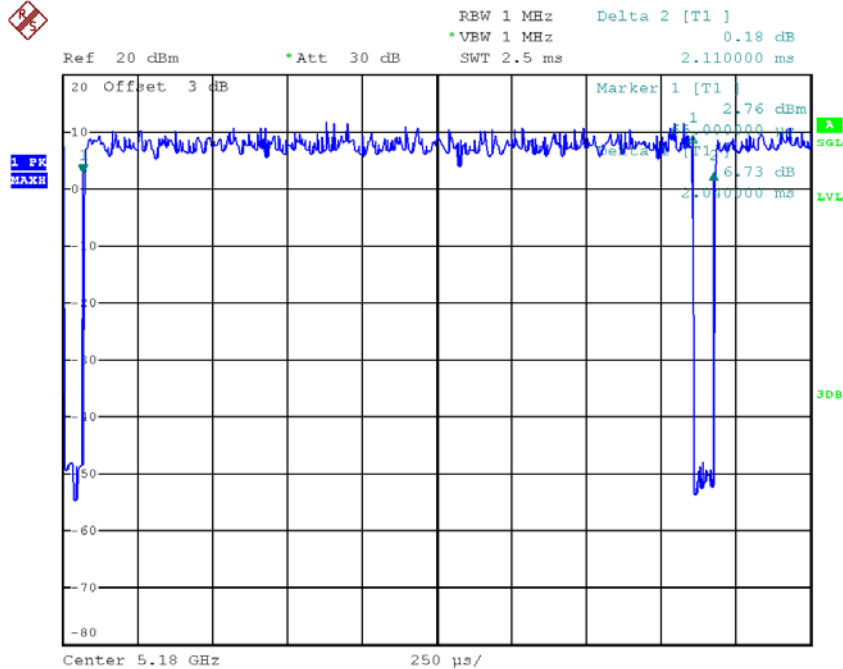

Date: 19.JUN.2018 11:59:31

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle < 98 %, so, the output power and power density should be cacluated as Output Power = Measured power + Ducus factor
 Power Spectral Density = Measured density + Duty factor

TX N20 Mode_DUTY CYCLE

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 4.960 msec

T_{Total} : 5.060 msec

Duty cycle: 98.02%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.00

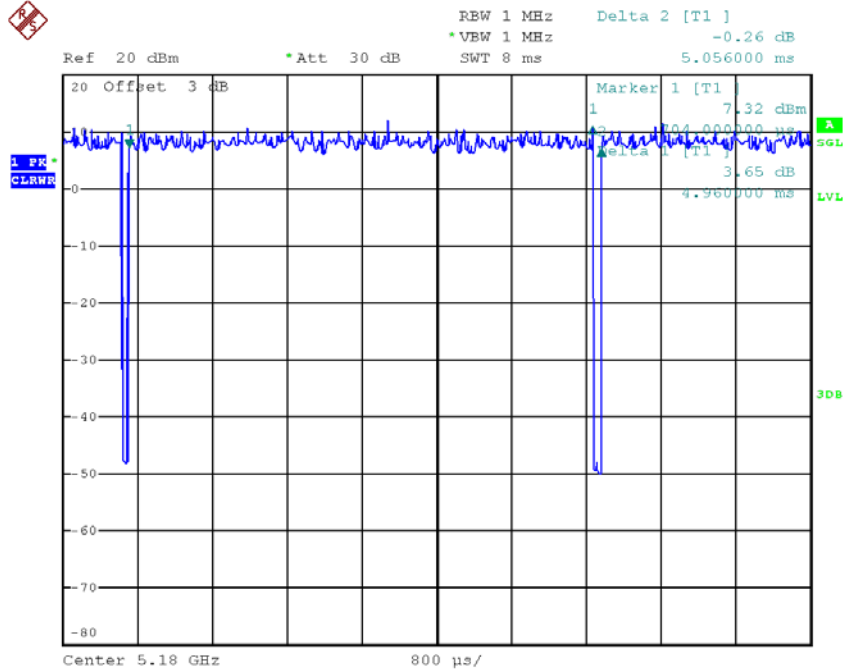

Date: 19.JUN.2018 12:07:46

Note: The duty cycle is $\geq 98\%$ no need to cacluated as Duty Factor.

TX N40 Mode_DUTY CYCLE

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 2.370 msec

T_{Total} : 2.480 msec

Duty cycle: 95.56%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.20

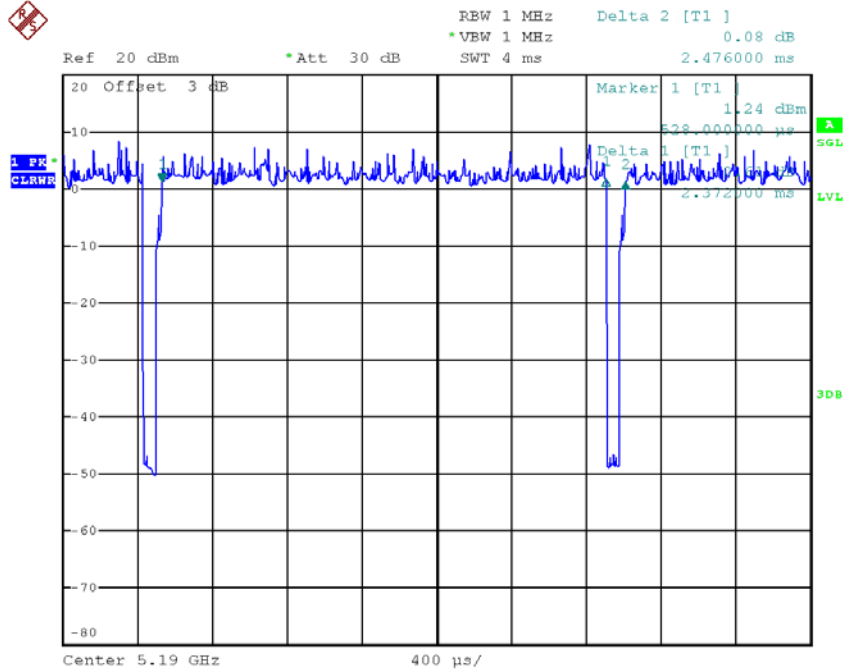

Date: 19.JUN.2018 12:10:11

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle < 98 %, so, the output power and power density should be cacluated as Output Power = Measured power + Ducus factor
 Power Spectral Density = Measured density + Duty factor

TX AC20 Mode_DUTY CYCLE

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 4.960 msec

T_{Total} : 5.060 msec

Duty cycle: 98.02%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.00

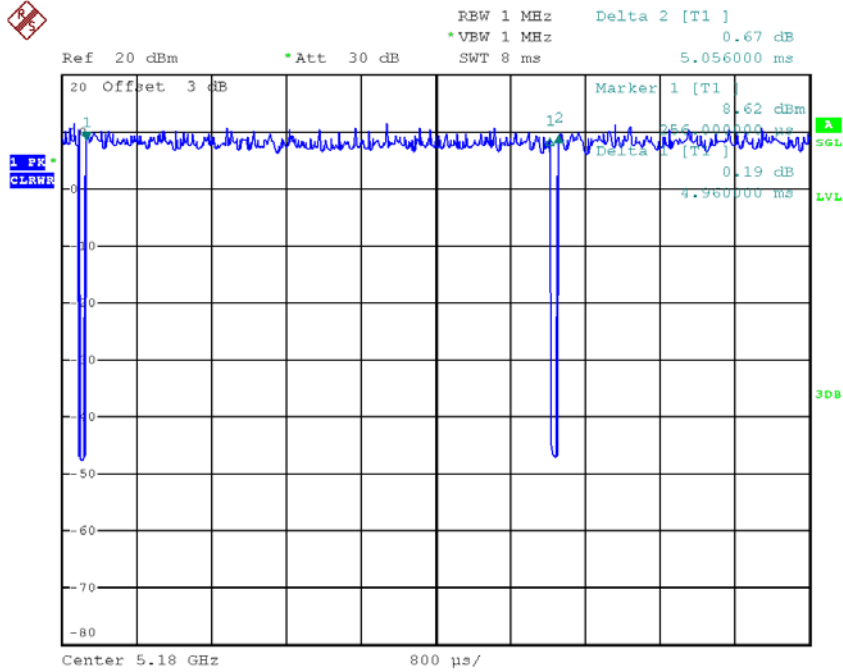

Date: 19.JUN.2018 12:05:23

Note: The duty cycle is $\geq 98\%$ no need to cacluated as Duty Factor.

TX AC40 Mode_DUTY CYCLE

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 2.370 msec

T_{Total} : 2.490 msec

Duty cycle: 95.18%

Duty Factor = $10 \log(1/Duty\ cycle)$

Duty Factor = 0.21

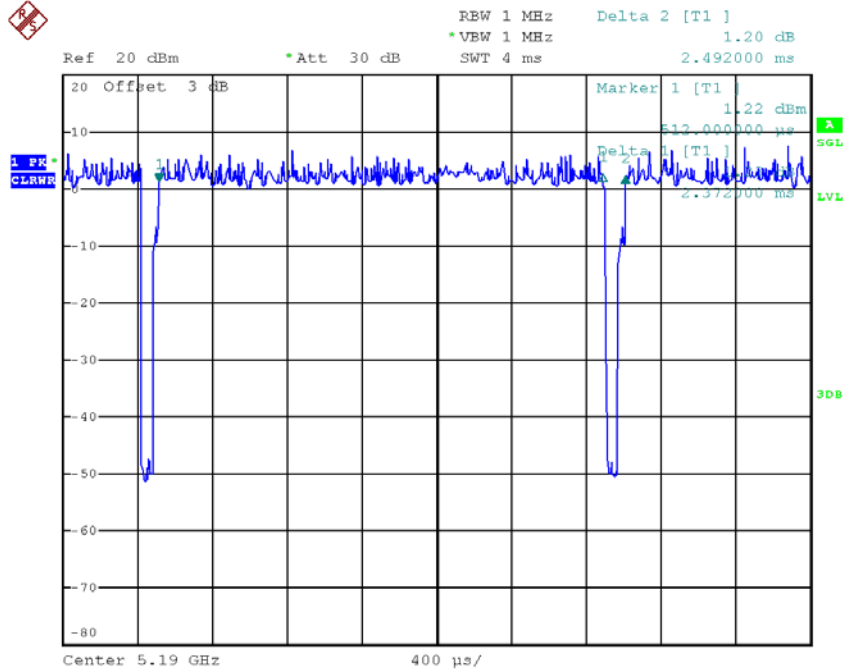

Date: 19.JUN.2018 12:11:30

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle < 98 %, so, the output power and power density should be cacluated as Output Power = Measured power + Ducus factor
 Power Spectral Density = Measured density + Duty factor

TX AC80 Mode_DUTY CYCLE

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 1.115 msec

T_{Total} : 1.205 msec

Duty cycle: 92.53%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.34

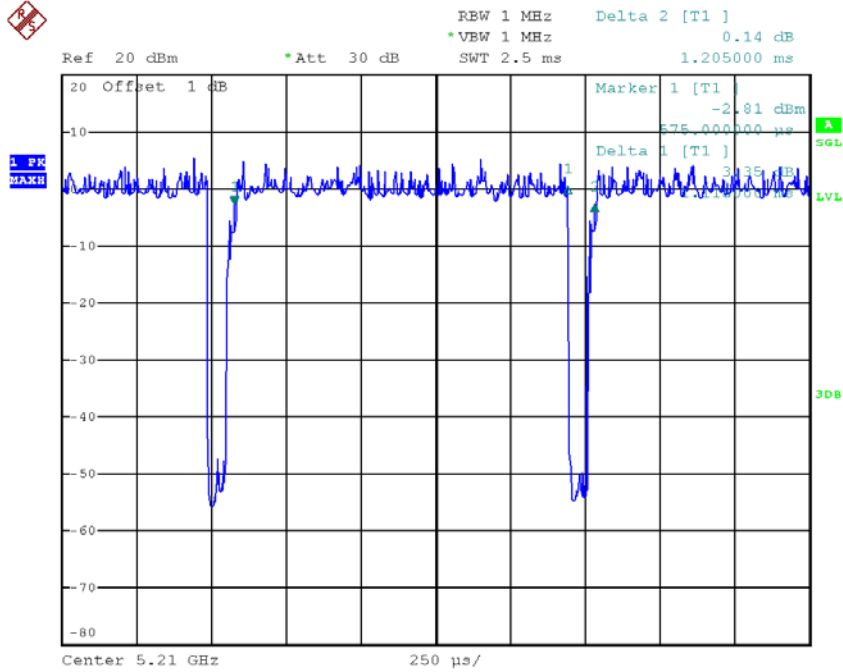

Date: 20.JUL.2018 16:18:24

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle < 98 %, so, the output power and power density should be cacluated as Output Power = Measured power + Ducus factor
Power Spectral Density = Measured density + Duty factor


APPENDIX E - BANDWIDTH

Non-Beamforming

Test Mode: UNII-1/TX A Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	20.60	16.70
CH40	5200	25.49	16.80
CH48	5240	23.85	16.80

TX CH36

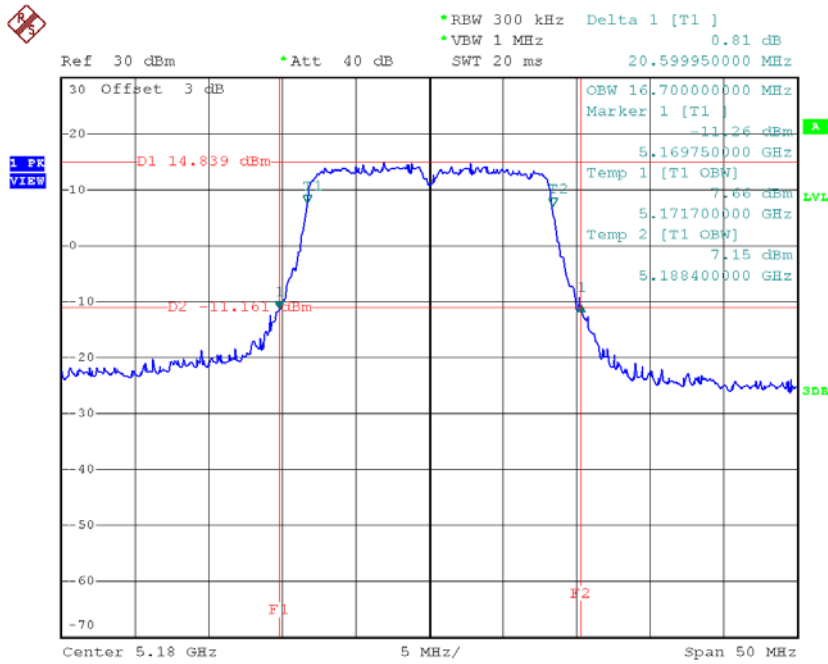


Date: 20.JUN.2018 15:39:12

TX CH40

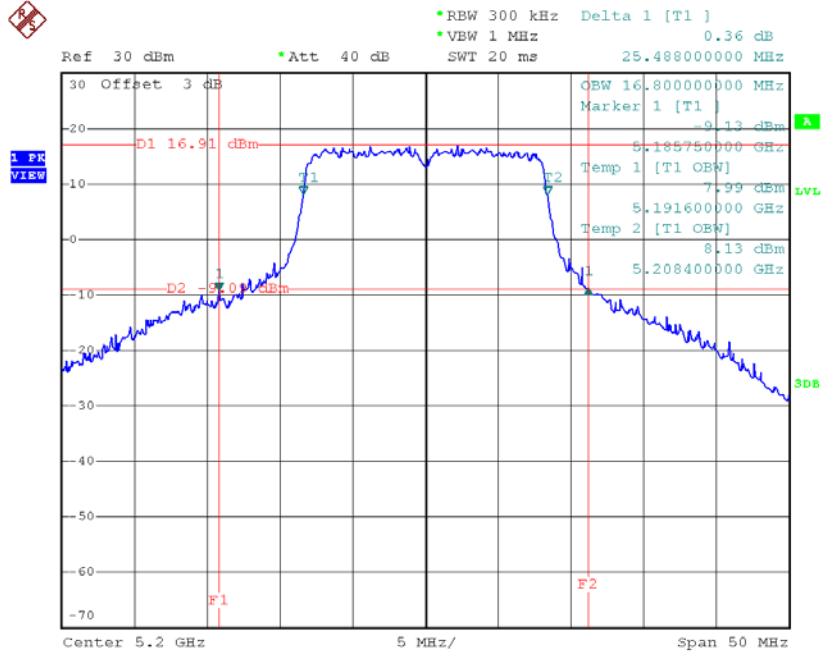

Date: 20.JUN.2018 15:49:02

TX CH48

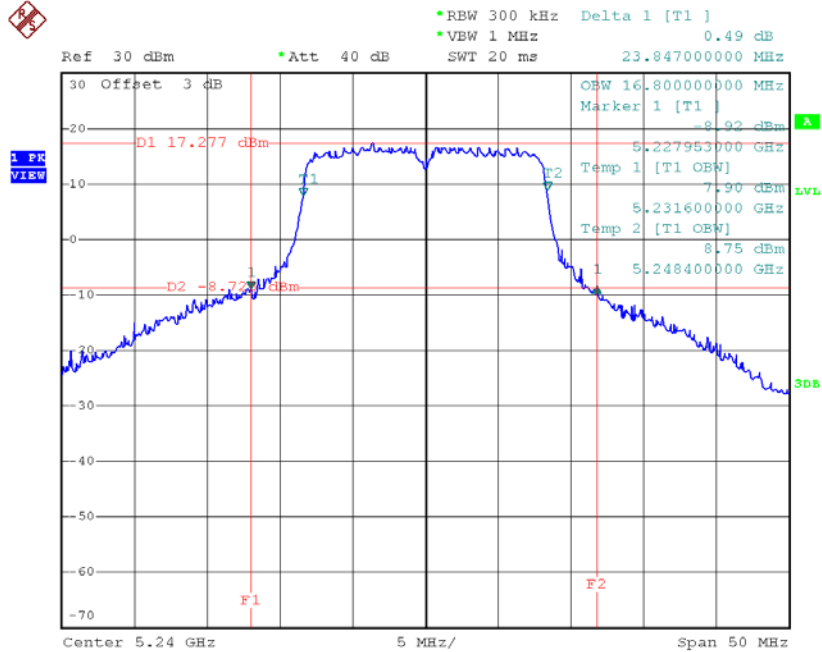


Date: 20.JUN.2018 15:49:57

Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	21.20	17.80
CH40	5200	34.59	18.50
CH48	5240	22.90	17.80

TX CH36

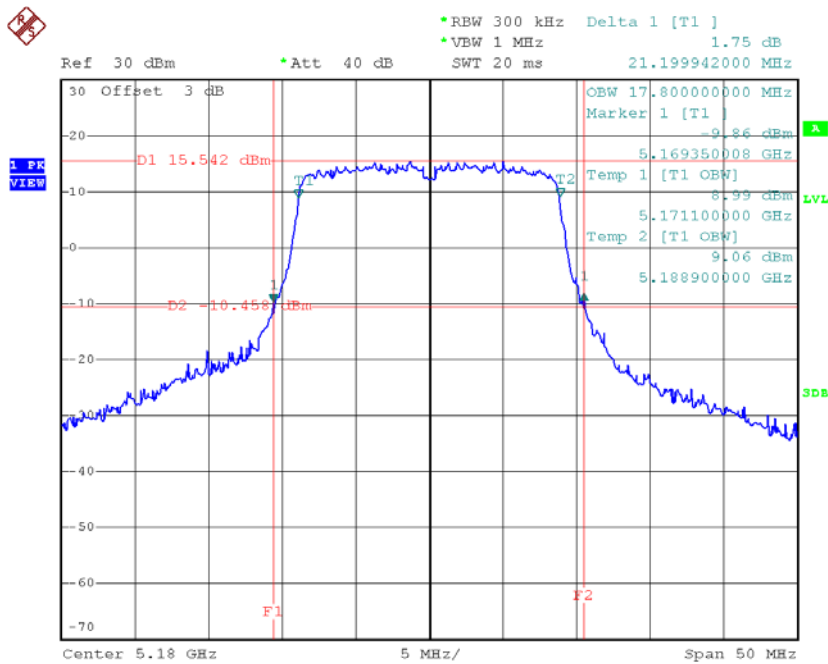


Date: 20.JUN.2018 16:18:07

TX CH40

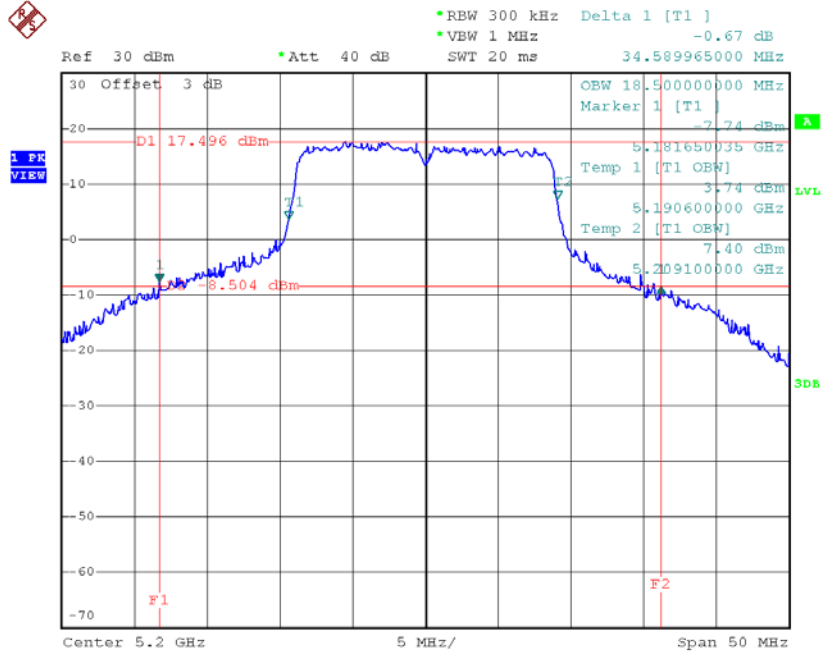

Date: 20.JUN.2018 16:19:06

TX CH48

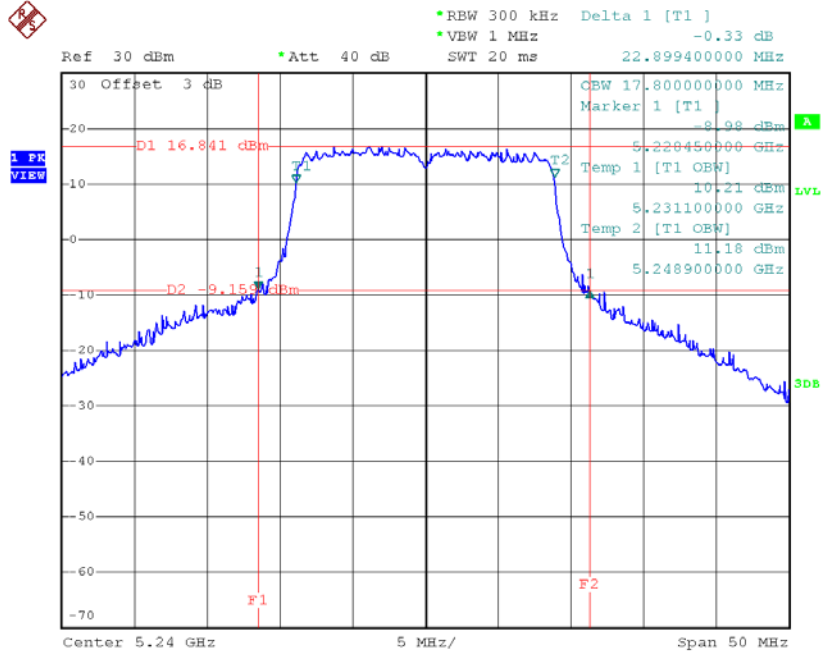


Date: 20.JUN.2018 16:20:06

Test Mode: UNII-1/TX N40 Mode_CH38/CH46


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	40.90	36.20
CH46	5230	40.90	36.00

TX CH38

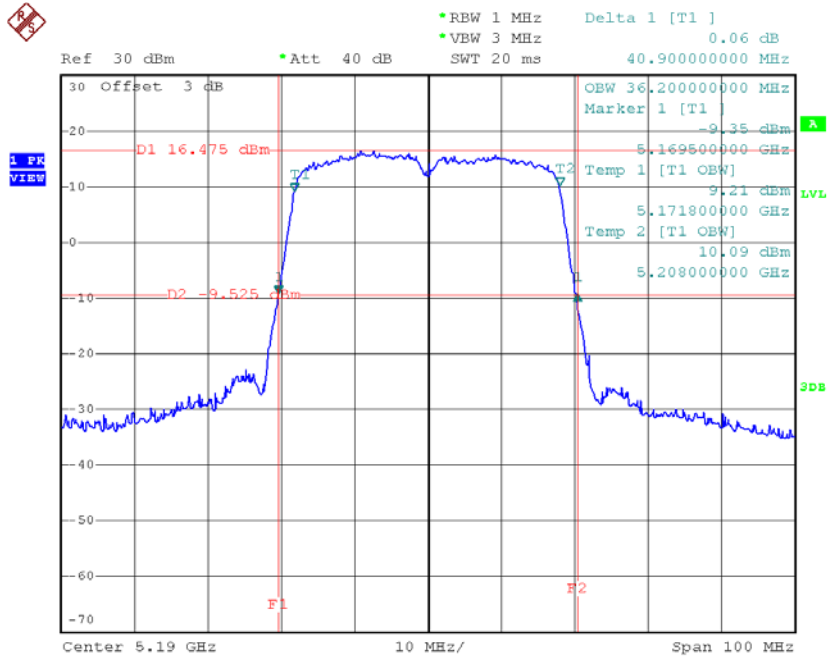

Date: 20.JUN.2018 16:56:44

TX CH46

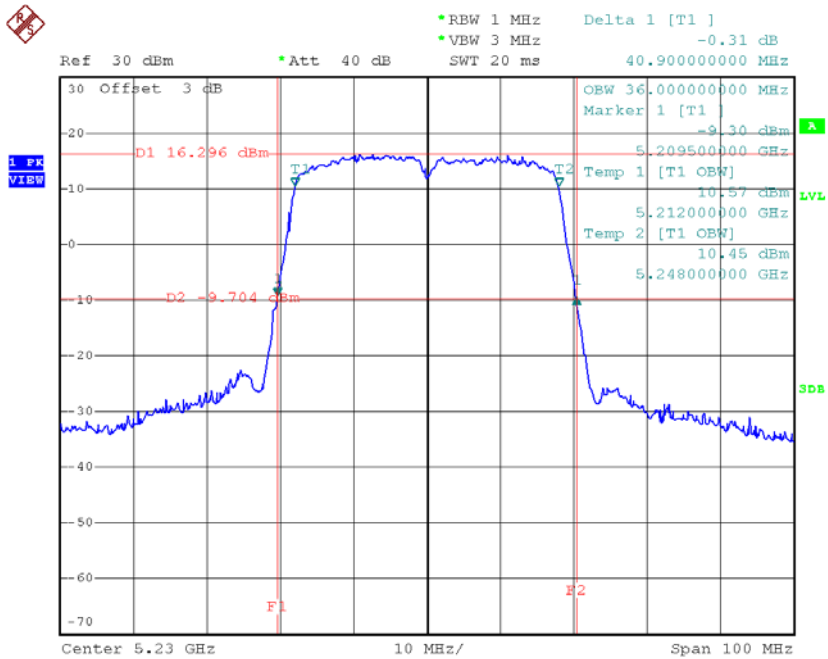

Date: 20.JUN.2018 16:58:58