




Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2422MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	04/22/2017
Ant.Polar.:	Vertical		

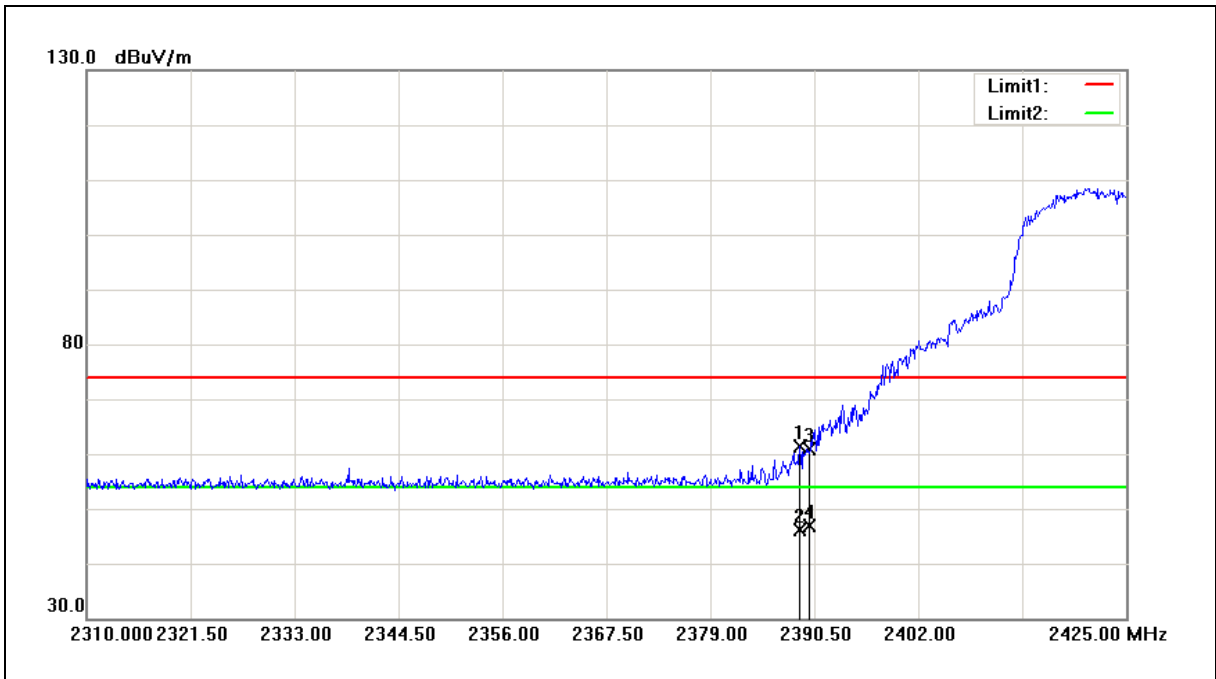

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.890	61.55	-0.26	61.29	74.00	-12.71	peak
2	2388.890	46.38	-0.26	46.12	54.00	-7.88	AVG
3	2390.000	61.10	-0.26	60.84	74.00	-13.16	peak
4	2390.000	47.22	-0.26	46.96	54.00	-7.04	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2437MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	04/22/2017
Ant.Polar.:	Horizontal		

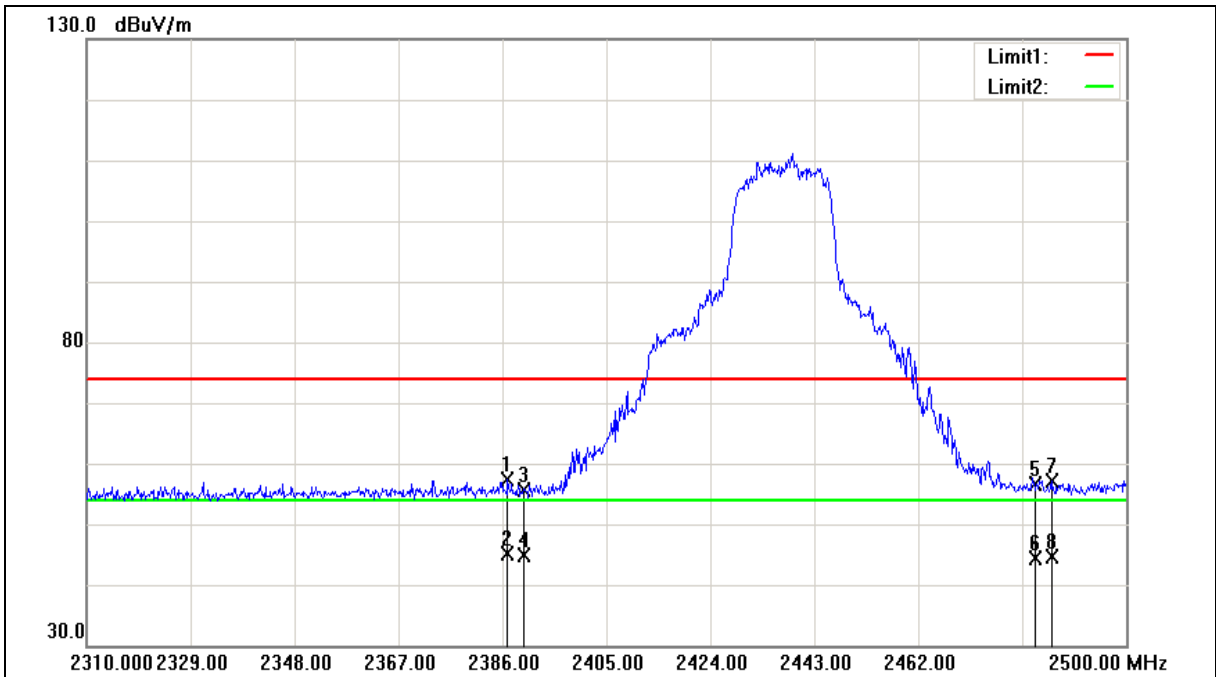

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.950	57.68	-0.27	57.41	74.00	-16.59	peak
2	2386.950	45.52	-0.27	45.25	54.00	-8.75	AVG
3	2390.000	55.99	-0.26	55.73	74.00	-18.27	peak
4	2390.000	45.24	-0.26	44.98	54.00	-9.02	AVG
5	2483.500	56.53	0.11	56.64	74.00	-17.36	peak
6	2483.500	44.31	0.11	44.42	54.00	-9.58	AVG
7	2486.320	56.90	0.12	57.02	74.00	-16.98	peak
8	2486.320	44.58	0.12	44.70	54.00	-9.30	AVG


Note:1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2437MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	04/22/2017
Ant.Polar.:	Vertical		

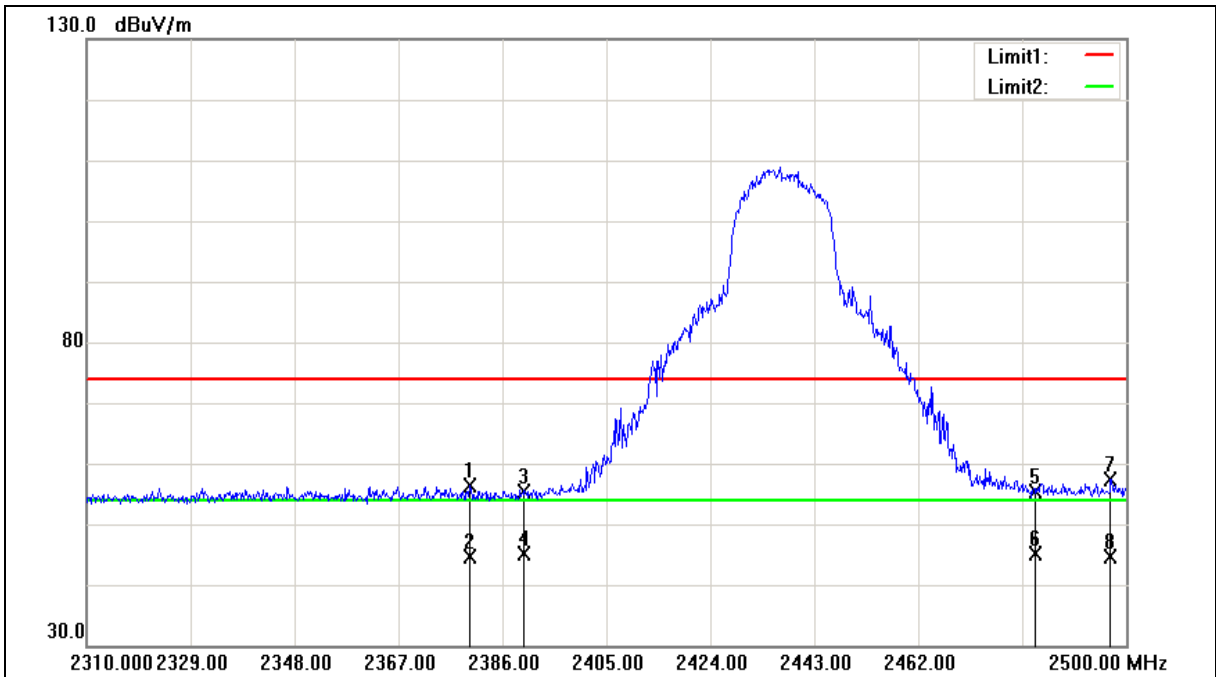

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2379.920	56.60	-0.30	56.30	74.00	-17.70	peak
2	2379.920	45.04	-0.30	44.74	54.00	-9.26	AVG
3	2390.000	55.60	-0.26	55.34	74.00	-18.66	peak
4	2390.000	45.48	-0.26	45.22	54.00	-8.78	AVG
5	2483.500	55.36	0.11	55.47	74.00	-18.53	peak
6	2483.500	45.06	0.11	45.17	54.00	-8.83	AVG
7	2497.150	57.25	0.17	57.42	74.00	-16.58	peak
8	2497.150	44.49	0.17	44.66	54.00	-9.34	AVG


Note:1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2452MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	04/22/2017
Ant.Polar.:	Horizontal		

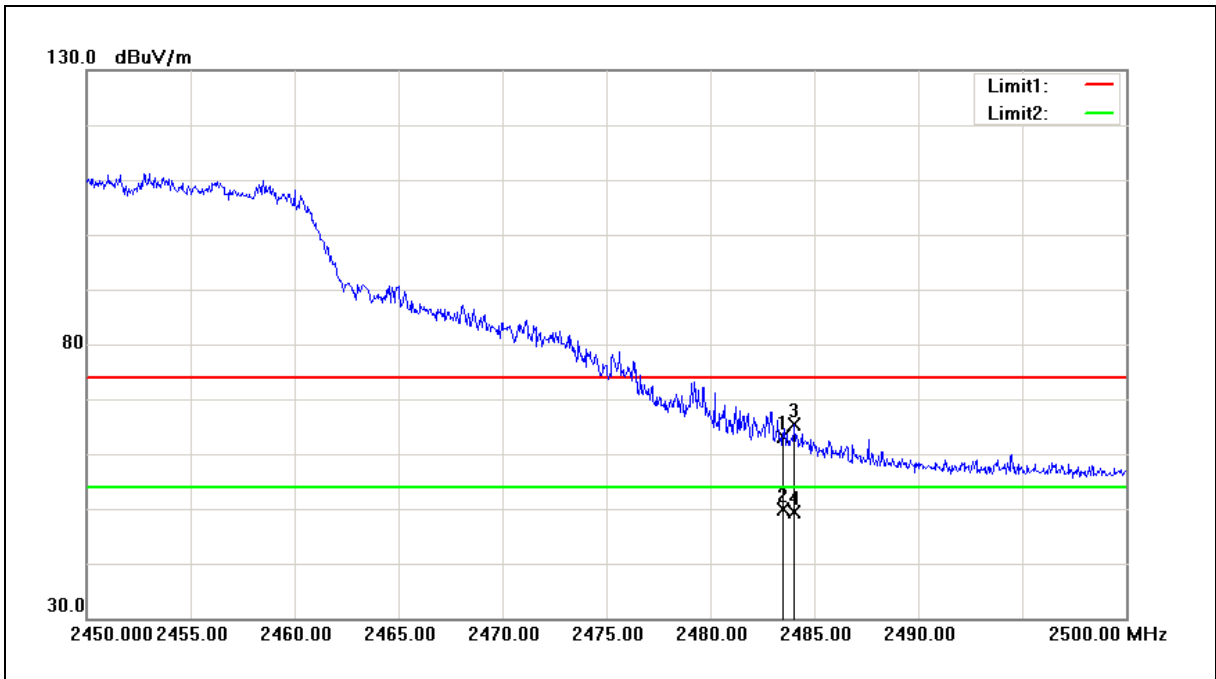

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	63.13	0.11	63.24	74.00	-10.76	peak
2	2483.500	49.85	0.11	49.96	54.00	-4.04	AVG
3	2484.050	65.15	0.12	65.27	74.00	-8.73	peak
4	2484.050	49.38	0.12	49.50	54.00	-4.50	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2452MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	04/22/2017
Ant.Polar.:	Vertical		

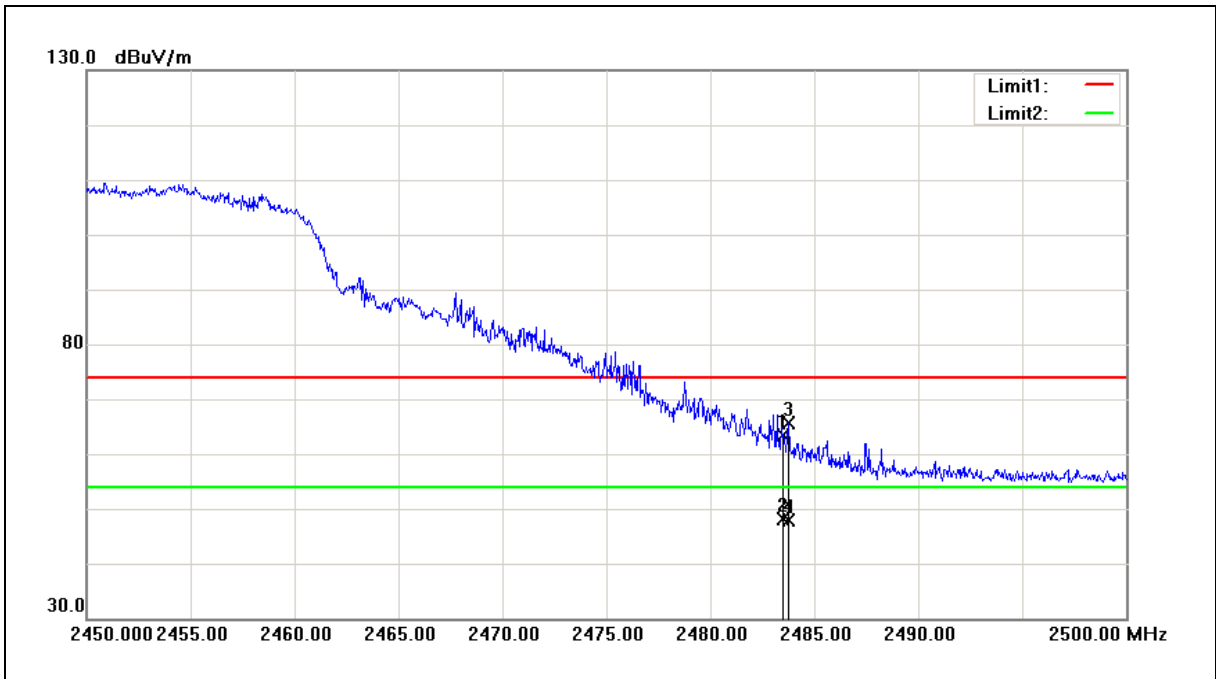

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	63.29	0.11	63.40	74.00	-10.60	peak
2	2483.500	47.92	0.11	48.03	54.00	-5.97	AVG
3	2483.750	65.48	0.11	65.59	74.00	-8.41	peak
4	2483.750	47.72	0.11	47.83	54.00	-6.17	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2462MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	04/22/2017
Ant.Polar.:	Horizontal		

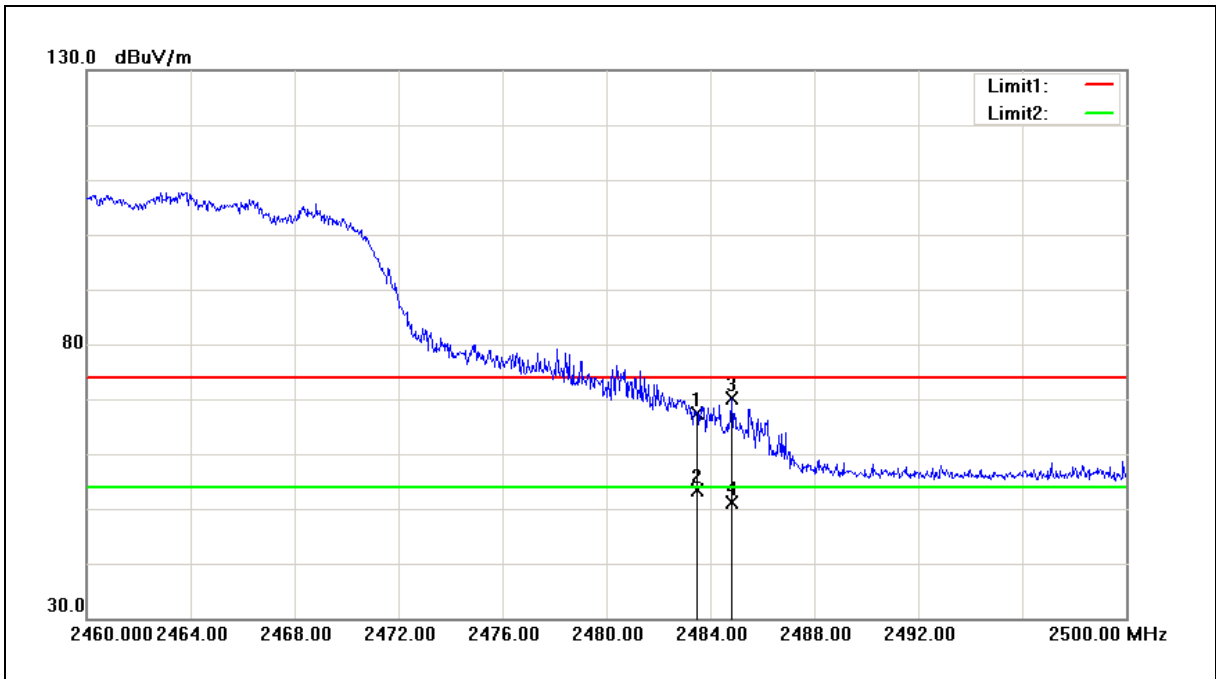

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	67.39	0.11	67.50	74.00	-6.50	peak
2	2483.500	53.16	0.11	53.27	54.00	-0.73	AVG
3	2484.840	69.98	0.12	70.10	74.00	-3.90	peak
4	2484.840	50.99	0.12	51.11	54.00	-2.89	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2462MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	04/22/2017
Ant.Polar.:	Vertical		

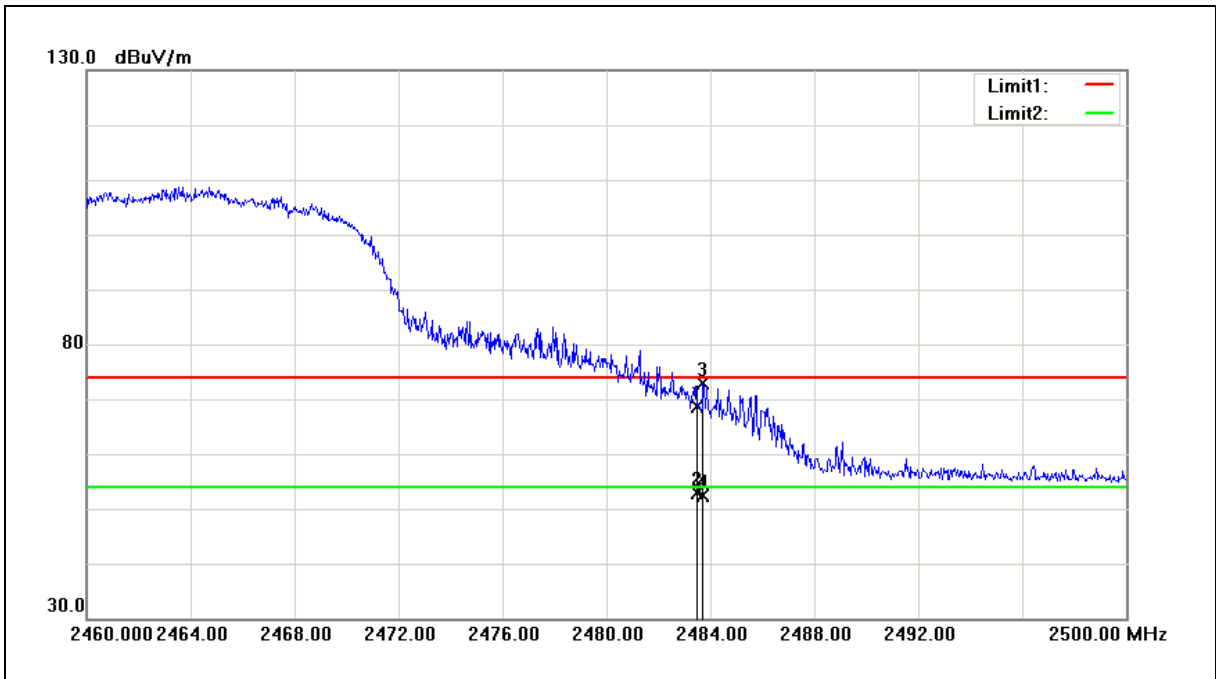

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	68.46	0.11	68.57	74.00	-5.43	peak
2	2483.500	52.79	0.11	52.90	54.00	-1.10	AVG
3	2483.720	72.83	0.11	72.94	74.00	-1.06	peak
4	2483.720	52.15	0.11	52.26	54.00	-1.74	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2422MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	04/22/2017
Ant.Polar.:	Horizontal		

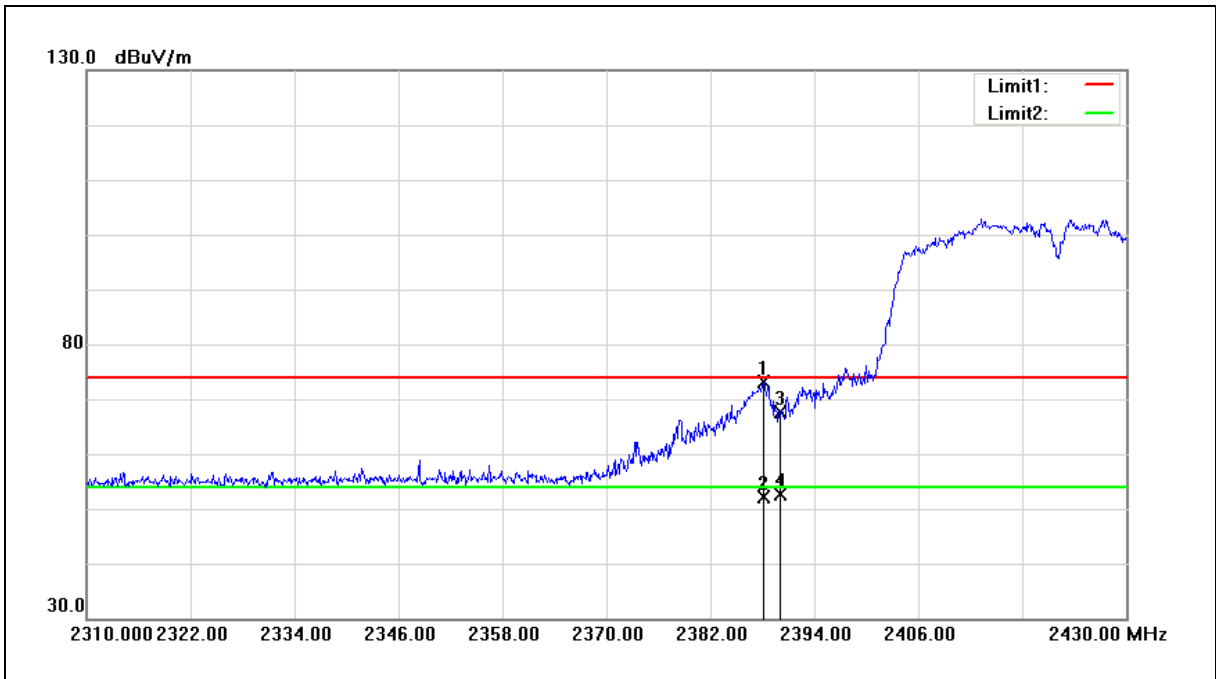

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.120	73.31	-0.26	73.05	74.00	-0.95	peak
2	2388.120	52.40	-0.26	52.14	54.00	-1.86	AVG
3	2390.000	67.90	-0.26	67.64	74.00	-6.36	peak
4	2390.000	52.99	-0.26	52.73	54.00	-1.27	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2422MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	04/22/2017
Ant.Polar.:	Vertical		

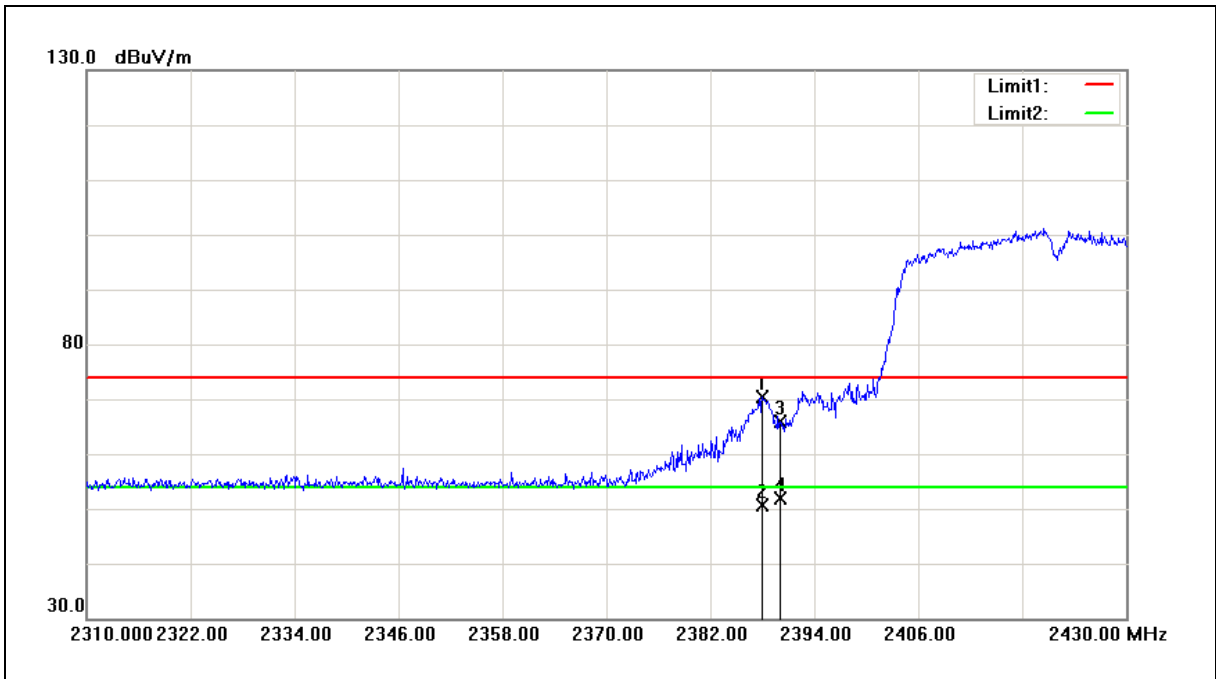

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.000	70.52	-0.26	70.26	74.00	-3.74	peak
2	2388.000	50.99	-0.26	50.73	54.00	-3.27	AVG
3	2390.000	66.06	-0.26	65.80	74.00	-8.20	peak
4	2390.000	52.21	-0.26	51.95	54.00	-2.05	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2427MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	04/22/2017
Ant.Polar.:	Horizontal		

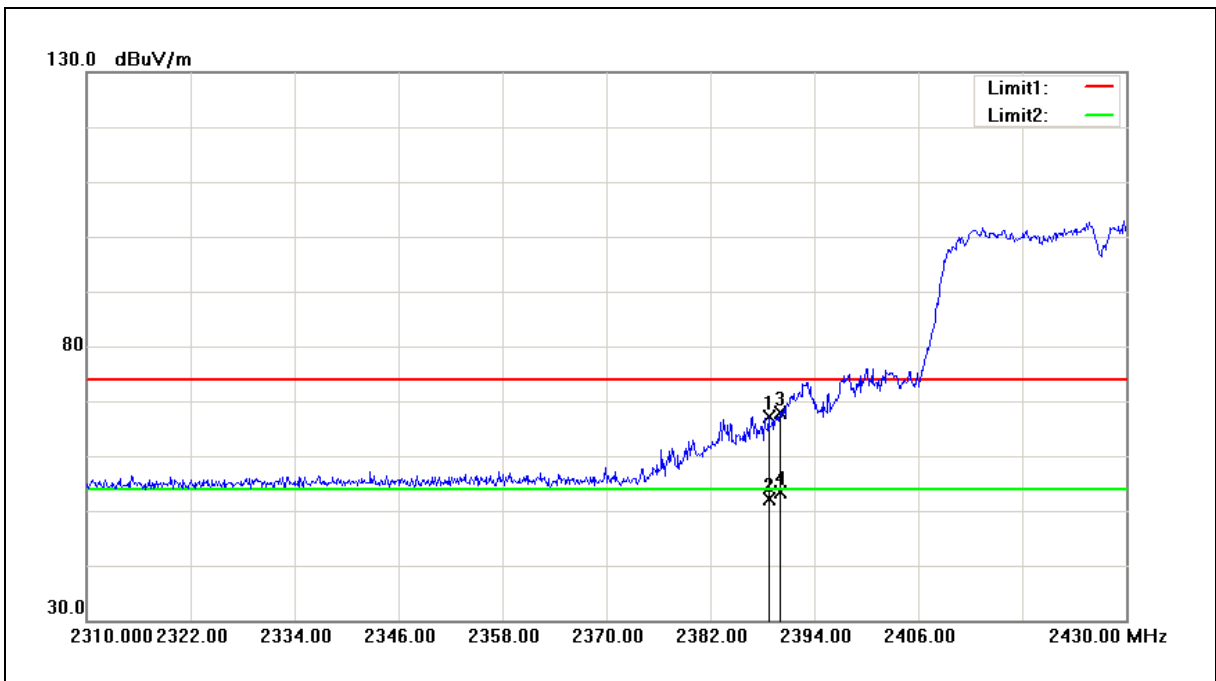

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.720	67.47	-0.26	67.21	74.00	-6.79	peak
2	2388.720	52.50	-0.26	52.24	54.00	-1.76	AVG
3	2390.000	68.13	-0.26	67.87	74.00	-6.13	peak
4	2390.000	53.64	-0.26	53.38	54.00	-0.62	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2427MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	04/22/2017
Ant.Polar.:	Vertical		

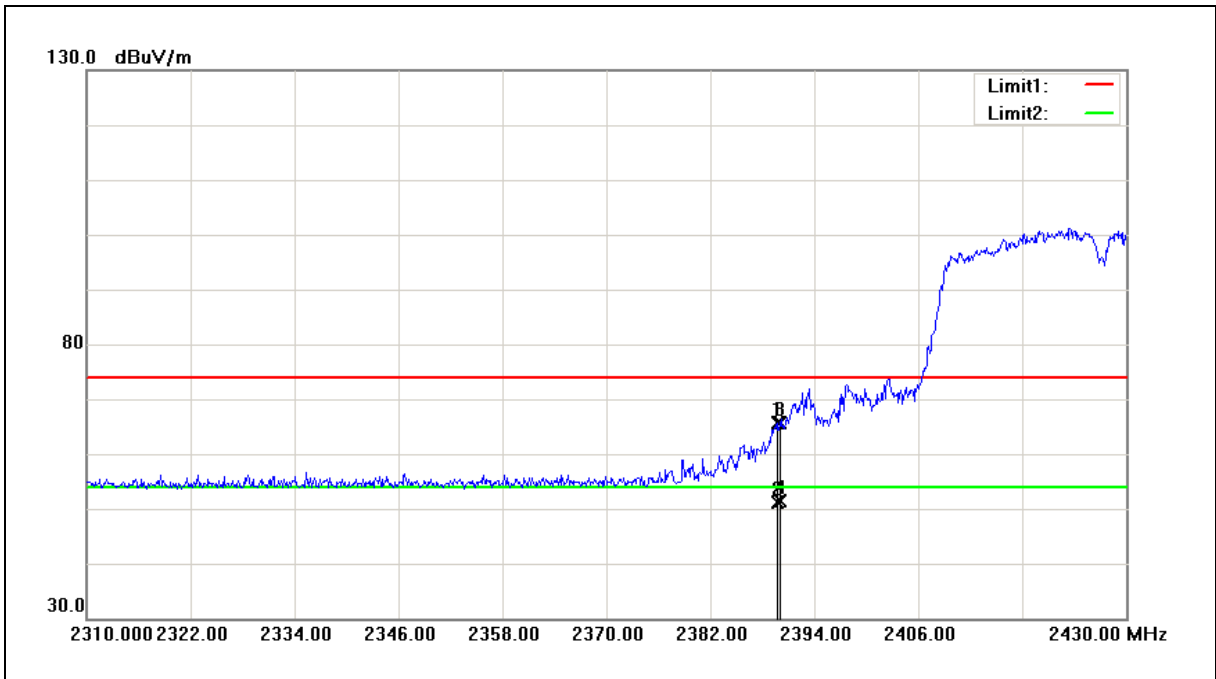

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.800	65.80	-0.26	65.54	74.00	-8.46	peak
2	2389.800	51.47	-0.26	51.21	54.00	-2.79	AVG
3	2390.000	65.95	-0.26	65.69	74.00	-8.31	peak
4	2390.000	51.54	-0.26	51.28	54.00	-2.72	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2437MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	04/22/2017
Ant.Polar.:	Horizontal		

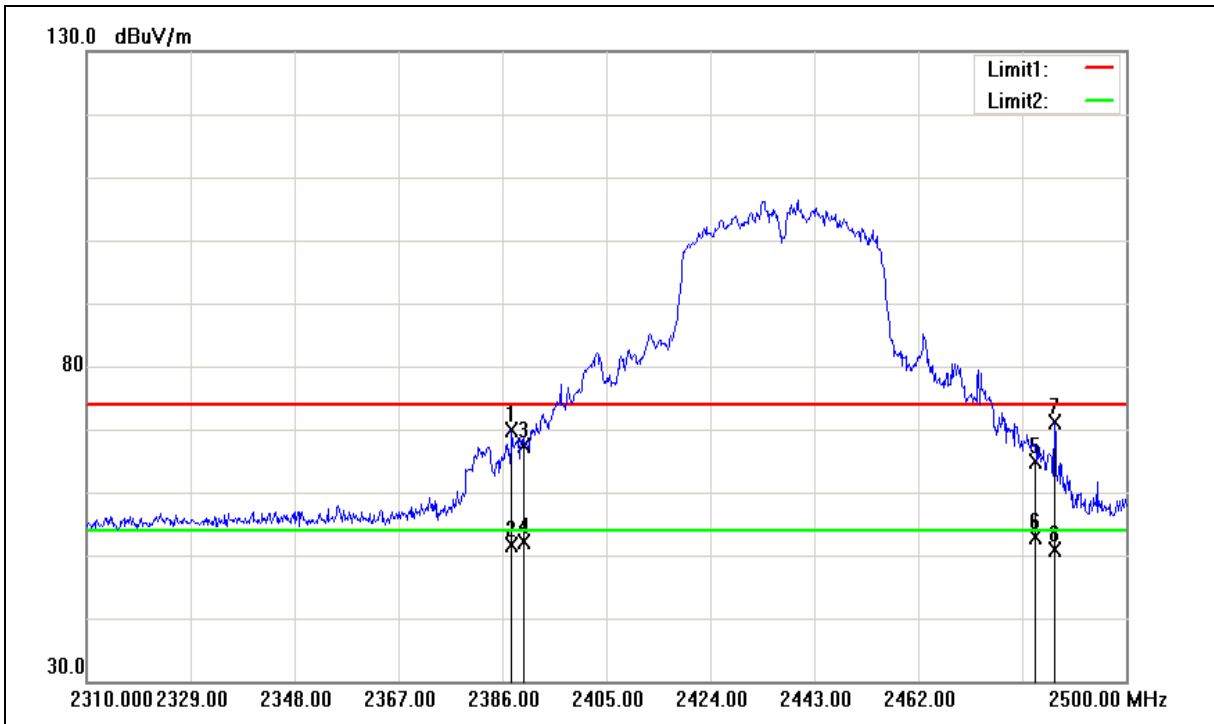

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.710	70.15	-0.26	69.89	74.00	-4.11	peak
2	2387.710	51.95	-0.26	51.69	54.00	-2.31	AVG
3	2390.000	67.72	-0.26	67.46	74.00	-6.54	peak
4	2390.000	52.43	-0.26	52.17	54.00	-1.83	AVG
5	2483.500	64.86	0.11	64.97	74.00	-9.03	peak
6	2483.500	52.76	0.11	52.87	54.00	-1.13	AVG
7	2486.890	71.02	0.12	71.14	74.00	-2.86	peak
8	2486.890	50.71	0.12	50.83	54.00	-3.17	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2437MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	04/22/2017
Ant.Polar.:	Vertical		

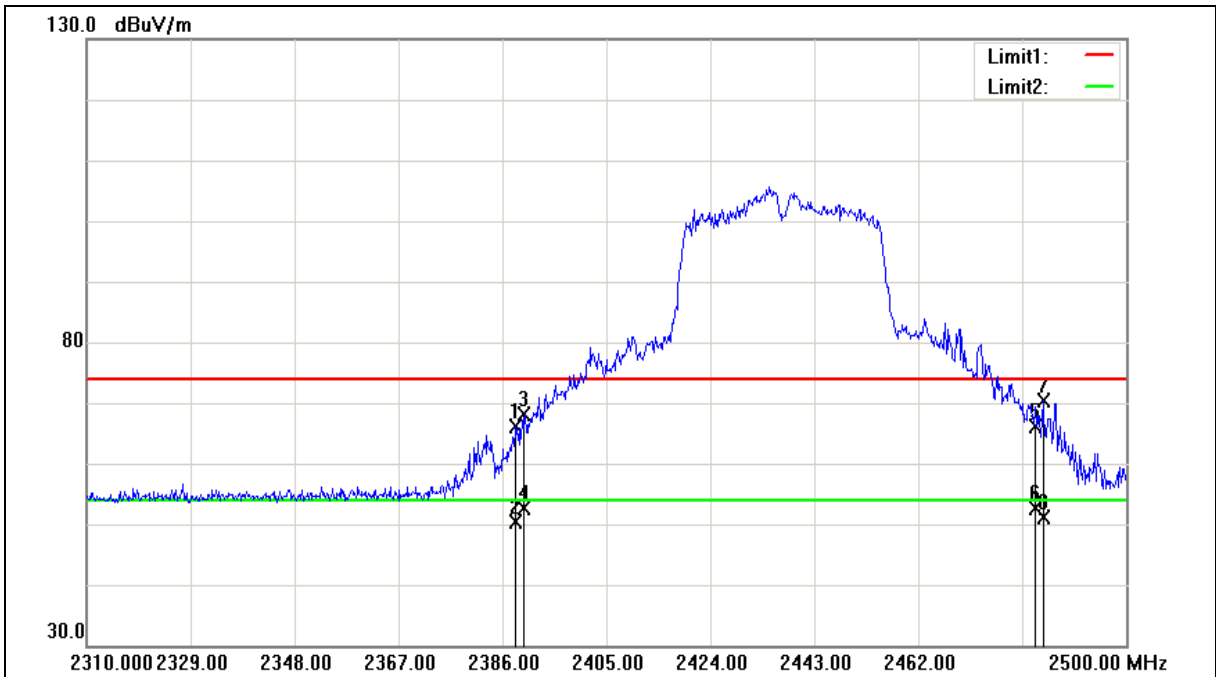

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.470	66.44	-0.26	66.18	74.00	-7.82	peak
2	2388.470	50.67	-0.26	50.41	54.00	-3.59	AVG
3	2390.000	68.38	-0.26	68.12	74.00	-5.88	peak
4	2390.000	52.85	-0.26	52.59	54.00	-1.41	AVG
5	2483.500	66.01	0.11	66.12	74.00	-7.88	peak
6	2483.500	52.41	0.11	52.52	54.00	-1.48	AVG
7	2484.800	70.30	0.12	70.42	74.00	-3.58	peak
8	2484.800	51.05	0.12	51.17	54.00	-2.83	AVG


Note:1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2447MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	04/22/2017
Ant.Polar.:	Horizontal		

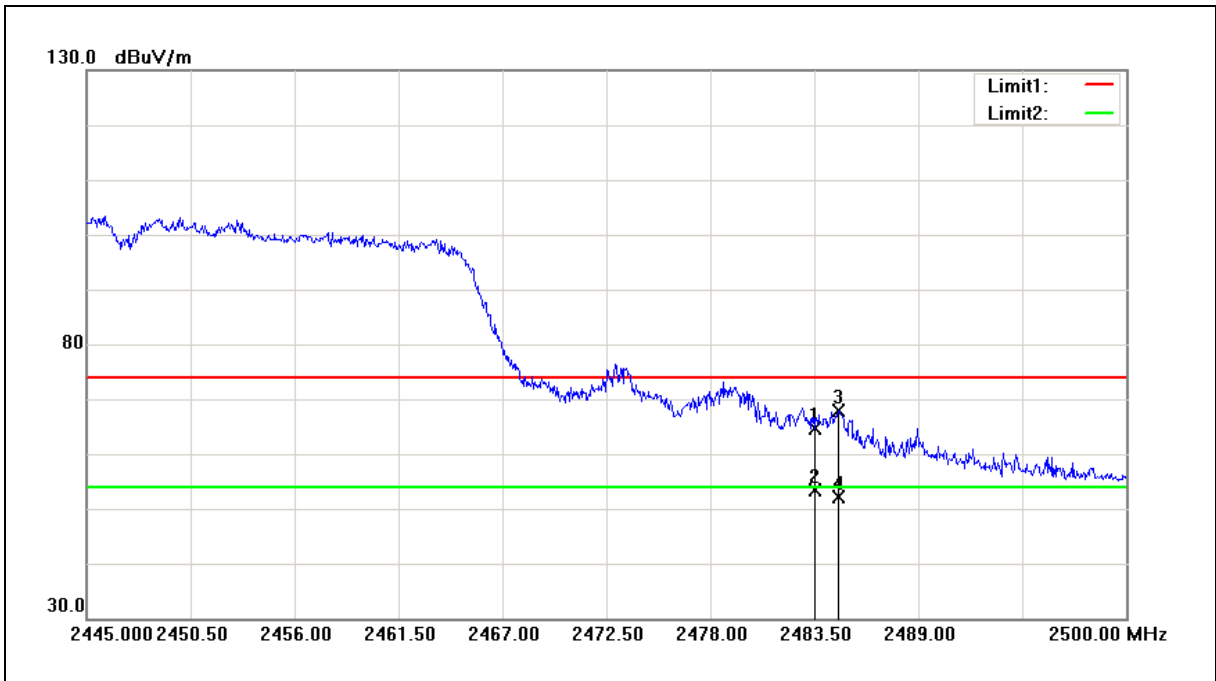

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	64.42	0.11	64.53	74.00	-9.47	peak
2	2483.500	53.27	0.11	53.38	54.00	-0.62	AVG
3	2484.765	67.78	0.12	67.90	74.00	-6.10	peak
4	2484.765	52.08	0.12	52.20	54.00	-1.80	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2447MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	04/22/2017
Ant.Polar.:	Vertical		

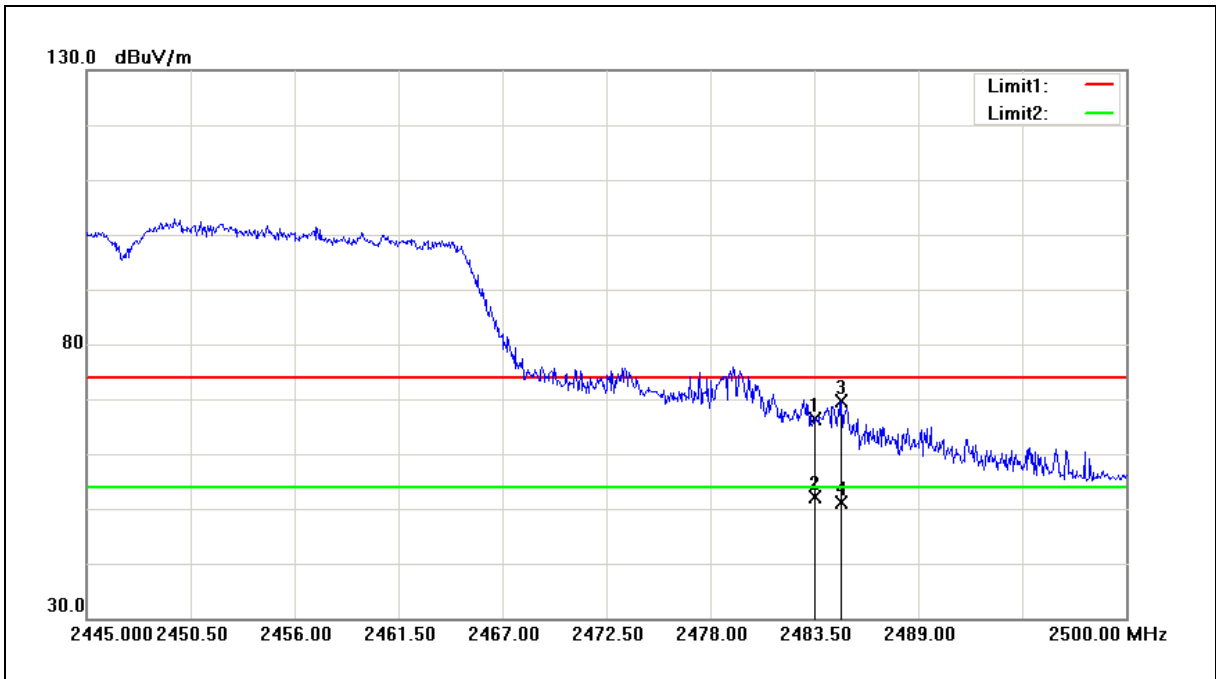

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	66.33	0.11	66.44	74.00	-7.56	peak
2	2483.500	51.98	0.11	52.09	54.00	-1.91	AVG
3	2484.930	69.52	0.12	69.64	74.00	-4.36	peak
4	2484.930	51.11	0.12	51.23	54.00	-2.77	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2452MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	04/22/2017
Ant.Polar.:	Horizontal		

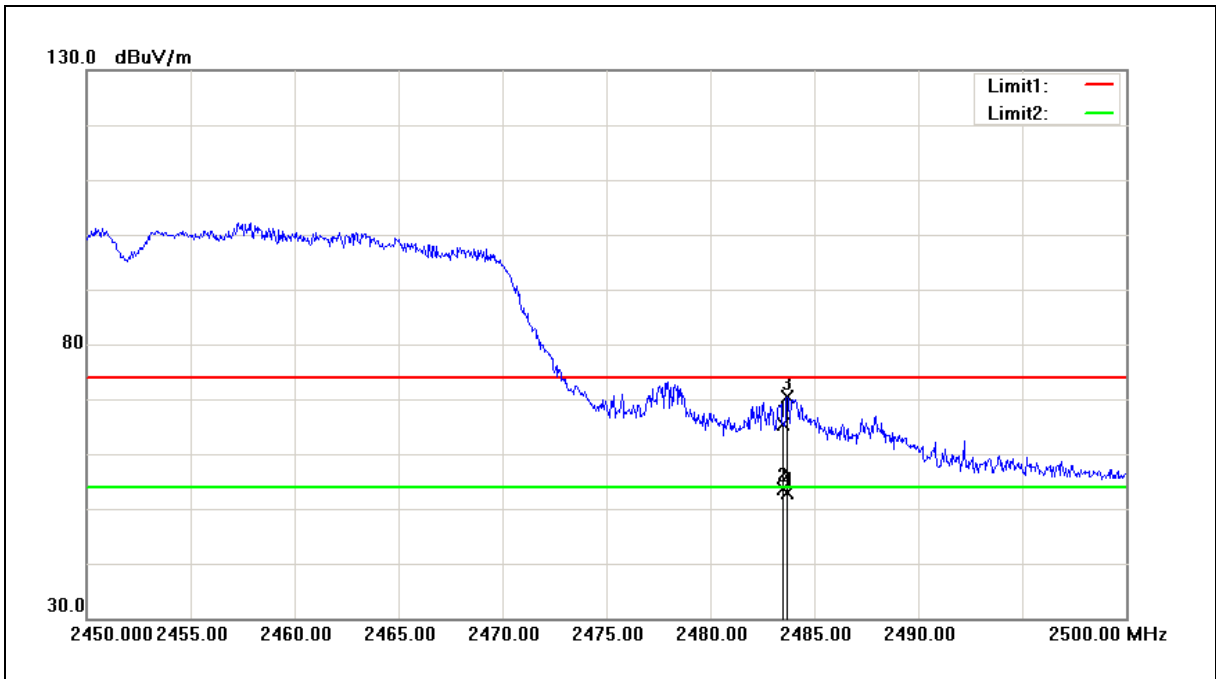

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	65.39	0.11	65.50	74.00	-8.50	peak
2	2483.500	52.46	0.11	52.57	54.00	-1.43	AVG
3	2483.700	70.31	0.11	70.42	74.00	-3.58	peak
4	2483.700	51.79	0.11	51.90	54.00	-2.1	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2452MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	04/22/2017
Ant.Polar.:	Vertical		

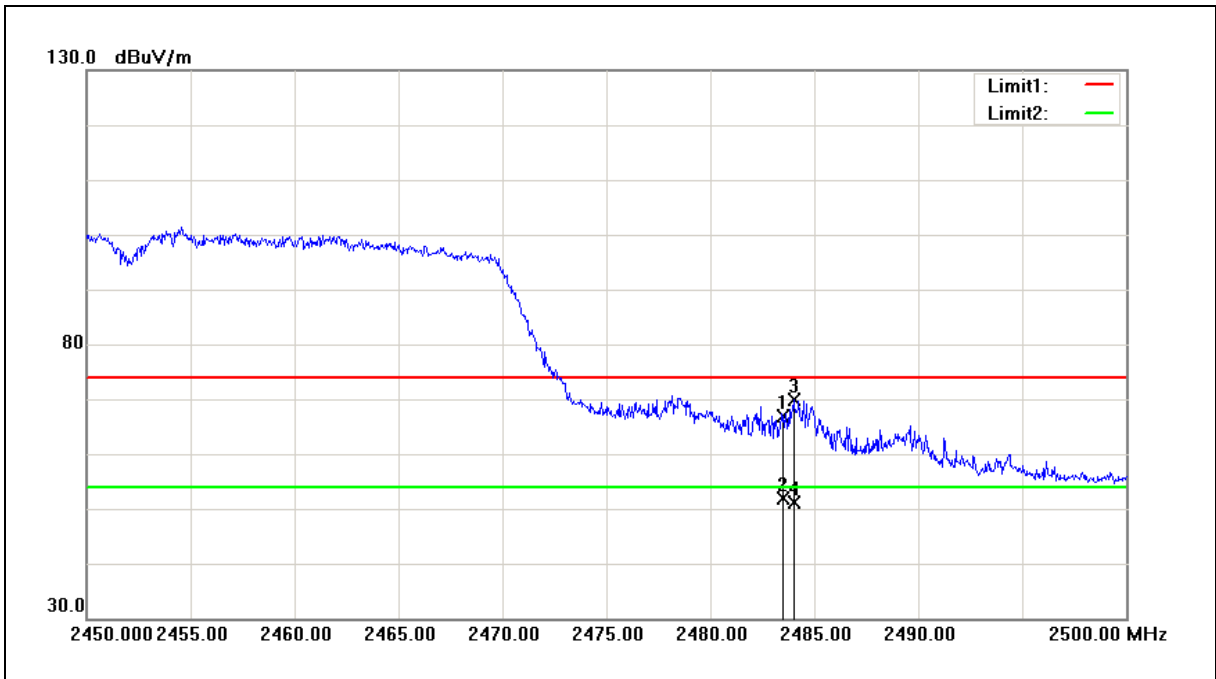

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	66.85	0.11	66.96	74.00	-7.04	peak
2	2483.500	51.68	0.11	51.79	54.00	-2.21	AVG
3	2484.000	69.84	0.12	69.96	74.00	-4.04	peak
4	2484.000	50.99	0.12	51.11	54.00	-2.89	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

6 Maximum Conducted Output Power Measurement

6.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for maximum output power is 30dBm.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

IEEE 802.11b/g

* CDD mode: Directional Gain = $10 \cdot \log\{[10^{(G1/10)} + 10^{(G2/10)} + \dots + 10^{(Gn/10)}] / NANT\} = 3.96 \text{ dBi} < 6 \text{ dBi}$


* CDD mode: Power limit=30dBm

IEEE 802.11n 2.4GHz 20MHz/40MHz

* MIMO mode : Directional Gain = $10 \cdot \log\{[10^{(G1/10)} + 10^{(G2/10)} + \dots + 10^{(Gn/10)}] / NANT\} = 3.96 \text{ dBi} < 6 \text{ dBi}$

* MIMO mode power limit shall be reduced = $30 - 0 = 30 \text{ dBm}$.

6.2. Test Setup

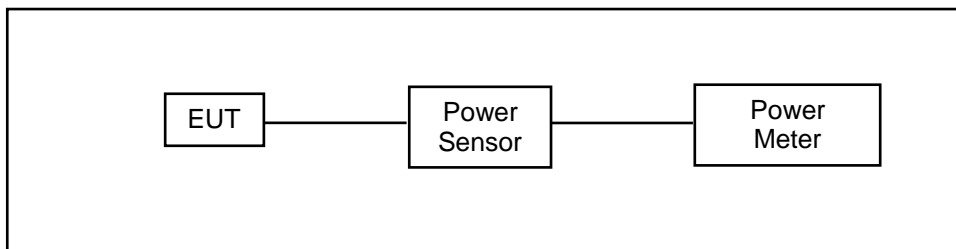

6.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Power Sensor	Anritsu	MA2411B	1126022	08/29/2016	1 year
Power Meter	Anritsu	ML2495A	1135009	08/29/2016	1 year
Microwave Cable	EMCI	EMC104-SM-SM-1500	140303	02/22/2017	1 year
Test Site	ATL	TE05	TE05	N.C.R.	-----

Note: N.C.R. = No Calibration Request.

6.4. Test Procedure

The testing follows the Measurement Procedure of ANSI C63.10-2013 section 11.9.2.3 Method AVGPM.

The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor.



6.5. Test Result

Date of Test	04/22/2017				
Antenna	ANT-0				
Test Mode	Frequency (MHz)	Data Rate	Average Output Power		
			Measurement Results		Limit
			dBm	W	dBm
Mode 2	2412.0	1M	20.16	0.104	<30
	2417.0		20.55	0.114	<30
	2422.0		20.56	0.114	<30
	2437.0		20.52	0.113	<30
	2452.0		21.03	0.127	<30
	2457.0		20.97	0.125	<30
	2462.0		20.98	0.125	<30
	2437.0	2M	20.49	0.112	<30
	2437.0	5.5M	20.46	0.111	<30
	2437.0	11M	20.42	0.110	<30
Mode 3	2412.0	6M	18.55	0.072	<30
	2417.0		19.99	0.100	<30
	2422.0		19.90	0.098	<30
	2437.0		20.05	0.101	<30
	2452.0		19.93	0.098	<30
	2457.0		19.95	0.099	<30
	2462.0		16.74	0.047	<30
	2437.0	9M	20.03	0.101	<30
	2437.0	12M	20.02	0.100	<30
	2437.0	18M	19.96	0.099	<30
	2437.0	24M	20.01	0.100	<30
	2437.0	36M	19.98	0.100	<30
	2437.0	48M	19.99	0.100	<30
	2437.0	54M	19.94	0.099	<30

Note: The relevant measured result has the offset with cable loss already.



Date of Test	04/22/2017				
Antenna	ANT-0				
Test Mode	Frequency (MHz)	Data Rate	Average Output Power		
			Measurement Results		Limit
			dBm	W	dBm
Mode 4	2412.0	13M	17.21	0.053	<30
	2417.0		20.20	0.105	<30
	2422.0		20.27	0.106	<30
	2437.0		20.36	0.109	<30
	2452.0		20.23	0.105	<30
	2457.0		19.81	0.096	<30
	2462.0		16.23	0.042	<30
	2437.0	28.8M	20.35	0.108	<30
	2437.0	43.4M	20.33	0.108	<30
	2437.0	57.8M	20.30	0.107	<30
	2437.0	86.6M	20.32	0.108	<30
	2437.0	115.6M	20.28	0.107	<30
	2437.0	130M	20.26	0.106	<30
	2437.0	144.4M	20.24	0.106	<30
Mode 5	2422.0	27M	14.48	0.028	<30
	2427.0		15.60	0.036	<30
	2437.0		18.35	0.068	<30
	2447.0		15.45	0.035	<30
	2452.0		13.88	0.024	<30
	2437.0	60M	18.33	0.068	<30
	2437.0	90M	18.31	0.068	<30
	2437.0	120M	18.22	0.066	<30
	2437.0	180M	18.28	0.067	<30
	2437.0	240M	18.23	0.067	<30
	2437.0	270M	18.25	0.067	<30
	2437.0	300M	18.20	0.066	<30

Note: The relevant measured result has the offset with cable loss already.



Date of Test	04/22/2017				
Antenna	ANT-1				
Test Mode	Frequency (MHz)	Data Rate	Average Output Power		
			Measurement Results		Limit
			dBm	W	dBm
Mode 2	2412.0	1M	19.98	0.100	<30
	2417.0		20.38	0.109	<30
	2422.0		20.34	0.108	<30
	2437.0		20.36	0.109	<30
	2452.0		20.62	0.115	<30
	2457.0		20.72	0.118	<30
	2462.0		20.29	0.107	<30
	2437.0	2M	20.33	0.108	<30
	2437.0	5.5M	20.31	0.107	<30
	2437.0	11M	20.27	0.106	<30
Mode 3	2412.0	6M	18.46	0.070	<30
	2417.0		19.90	0.098	<30
	2422.0		19.85	0.097	<30
	2437.0		19.66	0.092	<30
	2452.0		19.47	0.089	<30
	2457.0		19.27	0.085	<30
	2462.0		16.14	0.041	<30
	2437.0	9M	19.65	0.092	<30
	2437.0	12M	19.63	0.092	<30
	2437.0	18M	19.54	0.090	<30
	2437.0	24M	19.62	0.092	<30
	2437.0	36M	19.56	0.090	<30
	2437.0	48M	19.58	0.091	<30
	2437.0	54M	19.53	0.090	<30

Note: The relevant measured result has the offset with cable loss already.



Date of Test	04/22/2017				
Antenna	ANT-1				
Test Mode	Frequency (MHz)	Data Rate	Average Output Power		
			Measurement Results		Limit
			dBm	W	dBm
Mode 4	2412.0	13M	17.13	0.052	<30
	2417.0		20.14	0.103	<30
	2422.0		20.00	0.100	<30
	2437.0		19.97	0.099	<30
	2452.0		19.76	0.095	<30
	2457.0		19.37	0.086	<30
	2462.0		15.54	0.036	<30
	2437.0	28.8M	19.96	0.099	<30
	2437.0	43.4M	19.93	0.098	<30
	2437.0	57.8M	19.88	0.097	<30
	2437.0	86.6M	19.90	0.098	<30
	2437.0	115.6M	19.86	0.097	<30
	2437.0	130M	19.83	0.096	<30
	2437.0	144.4M	19.80	0.095	<30
Mode 5	2422.0	27M	14.45	0.028	<30
	2427.0		15.51	0.036	<30
	2437.0		18.18	0.066	<30
	2447.0		15.30	0.034	<30
	2452.0		13.81	0.024	<30
	2437.0	60M	18.15	0.065	<30
	2437.0	90M	18.12	0.065	<30
	2437.0	120M	18.01	0.063	<30
	2437.0	180M	18.10	0.065	<30
	2437.0	240M	18.04	0.064	<30
	2437.0	270M	18.07	0.064	<30
	2437.0	300M	17.99	0.063	<30

Note: The relevant measured result has the offset with cable loss already.



Date of Test	04/22/2017				
Antenna	ANT-0+1				
Test Mode	Frequency (MHz)	Data Rate	Average Output Power		
			Measurement Results		Limit
			dBm	W	dBm
Mode 2	2412.0	1M	23.08	0.203	<30
	2417.0		23.48	0.223	<30
	2422.0		23.46	0.222	<30
	2437.0		23.45	0.221	<30
	2452.0		23.84	0.242	<30
	2457.0		23.86	0.243	<30
	2462.0		23.66	0.232	<30
	2437.0	2M	23.42	0.220	<30
	2437.0	5.5M	23.40	0.219	<30
	2437.0	11M	23.36	0.217	<30
Mode 3	2412.0	6M	21.52	0.142	<30
	2417.0		22.96	0.197	<30
	2422.0		22.89	0.194	<30
	2437.0		22.87	0.194	<30
	2452.0		22.72	0.187	<30
	2457.0		22.63	0.183	<30
	2462.0		19.46	0.088	<30
	2437.0	9M	22.85	0.193	<30
	2437.0	12M	22.84	0.192	<30
	2437.0	18M	22.77	0.189	<30
	2437.0	24M	22.83	0.192	<30
	2437.0	36M	22.79	0.190	<30
	2437.0	48M	22.80	0.191	<30
	2437.0	54M	22.75	0.188	<30

Note: The relevant measured result has the offset with cable loss already.



Date of Test	04/22/2017				
Antenna	ANT-0+1				
Test Mode	Frequency (MHz)	Data Rate	Average Output Power		
			Measurement Results		Limit
			dBm	W	dBm
Mode 4	2412.0	13M	20.18	0.104	<30
	2417.0		23.18	0.208	<30
	2422.0		23.15	0.206	<30
	2437.0		23.18	0.208	<30
	2452.0		23.01	0.200	<30
	2457.0		22.61	0.182	<30
	2462.0		18.91	0.078	<30
	2437.0	28.8M	23.17	0.207	<30
	2437.0	43.4M	23.14	0.206	<30
	2437.0	57.8M	23.11	0.204	<30
	2437.0	86.6M	23.13	0.205	<30
	2437.0	115.6M	23.09	0.203	<30
	2437.0	130M	23.06	0.202	<30
	2437.0	144.4M	23.04	0.201	<30
Mode 5	2422.0	27M	17.48	0.056	<30
	2427.0		18.57	0.072	<30
	2437.0		21.28	0.134	<30
	2447.0		18.39	0.069	<30
	2452.0		16.86	0.048	<30
	2437.0	60M	21.25	0.133	<30
	2437.0	90M	21.23	0.133	<30
	2437.0	120M	21.13	0.130	<30
	2437.0	180M	21.20	0.132	<30
	2437.0	240M	21.15	0.130	<30
	2437.0	270M	21.17	0.131	<30
	2437.0	300M	21.11	0.129	<30


Note: The relevant measured result has the offset with cable loss already.

7 6dB RF Bandwidth Measurement

7.1. Limit

6dB RF Bandwidth: Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

7.2. Test Setup

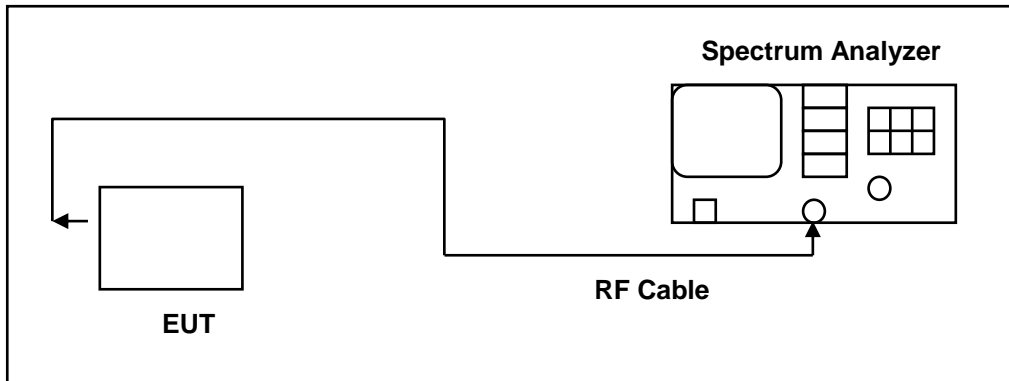

7.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/19/2016	1 year
Microwave Cable	EMCI	EMC104-SM-SM-1500	140303	02/22/2017	1 year
Test Site	ATL	TE05	TE05	N.C.R.	-----

Note: N.C.R. = No Calibration Request.

7.4. Test Procedure

The EUT tested to DTS test procedure of KDB558074D01 for compliance to FCC 47CFR 15.247 requirements.

6dB RF Bandwidth: The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.

The test was performed at 3 channels (Channel low, middle, high)

**7.5. Test Result**

Date of Test	05/04/2017			
Test Mode	Frequency (MHz)	Measurement (kHz)		Limit (kHz)
		ANT-0	ANT-1	
Mode 2	2412	10080	10080	> 500
	2437	10050	10080	> 500
	2462	10100	10090	> 500
Mode 3	2412	15140	15140	> 500
	2437	15130	15140	> 500
	2462	15130	15130	> 500
Mode 4	2412	15110	15130	> 500
	2437	15140	15130	> 500
	2462	15130	15140	> 500
Mode 5	2422	35090	35120	> 500
	2437	35080	35090	> 500
	2452	35080	35090	> 500



7.6. Test Graphs

Test Mode:	Mode 2: IEEE 802.11b Continuous TX mode
Antenna:	ANT-0
2412 MHz	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.412000000 GHz Trig: Free Run #Atten: 20 dB Avg/Hold: 10/10 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 12.1 dB Ref 22.10 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 14.931 MHz Total Power 27.4 dBm</p> <p>Transmit Freq Error 51.648 kHz OBW Power 99.00 % x dB Bandwidth 10.08 MHz x dB -6.00 dB</p> <p>Frequency Center Freq 2.412000000 GHz CF Step 3.000000 MHz Freq Offset 0 Hz</p>
2437 MHz	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz Trig: Free Run #Atten: 20 dB Avg/Hold: 10/10 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 12.1 dB Ref 22.10 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 15.030 MHz Total Power 28.0 dBm</p> <p>Transmit Freq Error 8.882 kHz OBW Power 99.00 % x dB Bandwidth 10.05 MHz x dB -6.00 dB</p> <p>Frequency Center Freq 2.437000000 GHz CF Step 3.000000 MHz Freq Offset 0 Hz</p>
2462 MHz	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.462000000 GHz Trig: Free Run #Atten: 20 dB Avg/Hold: 10/10 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 12.1 dB Ref 22.10 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 15.223 MHz Total Power 28.4 dBm</p> <p>Transmit Freq Error -74.934 kHz OBW Power 99.00 % x dB Bandwidth 10.10 MHz x dB -6.00 dB</p> <p>Frequency Center Freq 2.462000000 GHz CF Step 3.000000 MHz Freq Offset 0 Hz</p>



Test Mode:	Mode 3: IEEE 802.11g Continuous TX mode
Antenna:	ANT-0
2412 MHz	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.412000000 GHz Trig: Free Run #Atten: 20 dB AvgHld: 10/10 Radio Device: BTS</p> <p>Ref Offset 12.1 dB Ref 22.10 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.523 MHz Total Power 25.6 dBm</p> <p>Transmit Freq Error 25.965 kHz OBW Power 99.00 % x dB Bandwidth 15.14 MHz x dB -6.00 dB</p> <p>Frequency: 2.41200000 GHz CF Step: 3.000000 MHz Freq Offset: 0 Hz</p>
2437 MHz	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz Trig: Free Run #Atten: 20 dB AvgHld: 10/10 Radio Device: BTS</p> <p>Ref Offset 12.1 dB Ref 22.10 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 17.344 MHz Total Power 27.5 dBm</p> <p>Transmit Freq Error 86.193 kHz OBW Power 99.00 % x dB Bandwidth 15.13 MHz x dB -6.00 dB</p> <p>Frequency: 2.43700000 GHz CF Step: 3.000000 MHz Freq Offset: 0 Hz</p>
2462 MHz	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.462000000 GHz Trig: Free Run #Atten: 20 dB AvgHld: 10/10 Radio Device: BTS</p> <p>Ref Offset 12.1 dB Ref 22.10 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.365 MHz Total Power 23.9 dBm</p> <p>Transmit Freq Error -15.623 kHz OBW Power 99.00 % x dB Bandwidth 15.13 MHz x dB -6.00 dB</p> <p>Frequency: 2.46200000 GHz CF Step: 3.000000 MHz Freq Offset: 0 Hz</p>



Test Mode:	Mode 4: IEEE 802.11n 2.4GHz 20MHz Continuous TX mode
Antenna:	ANT-0
2412 MHz	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.412000000 GHz Trig: Free Run #Atten: 20 dB AvgHld: 10/10 Radio Device: BTS</p> <p>Ref Offset 12.1 dB Ref 22.10 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 17.537 MHz Total Power 24.3 dBm</p> <p>Transmit Freq Error 23.493 kHz OBW Power 99.00 % x dB Bandwidth 15.11 MHz x dB -6.00 dB</p> <p>Frequency Center Freq 2.412000000 GHz CF Step 3.000000 MHz Freq Offset 0 Hz</p>
2437 MHz	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz Trig: Free Run #Atten: 20 dB AvgHld: 10/10 Radio Device: BTS</p> <p>Ref Offset 12.1 dB Ref 22.10 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 17.831 MHz Total Power 27.8 dBm</p> <p>Transmit Freq Error 16.015 kHz OBW Power 99.00 % x dB Bandwidth 15.14 MHz x dB -6.00 dB</p> <p>Frequency Center Freq 2.437000000 GHz CF Step 3.000000 MHz Freq Offset 0 Hz</p>
2462 MHz	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.462000000 GHz Trig: Free Run #Atten: 20 dB AvgHld: 10/10 Radio Device: BTS</p> <p>Ref Offset 12.1 dB Ref 22.10 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 17.516 MHz Total Power 23.7 dBm</p> <p>Transmit Freq Error -5.489 kHz OBW Power 99.00 % x dB Bandwidth 15.13 MHz x dB -6.00 dB</p> <p>Frequency Center Freq 2.462000000 GHz CF Step 3.000000 MHz Freq Offset 0 Hz</p>



<p>Test Mode:</p>	<p>Mode 5: IEEE 802.11n 2.4GHz 40MHz Continuous TX mode</p>
<p>Antenna:</p>	<p>ANT-0</p>
<p>2422 MHz</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.42200000 GHz</p> <p>Ref Offset 12.1 dB Ref 22.10 dBm</p> <p>Center 2.422 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth 35.718 MHz</p> <p>Total Power 21.7 dBm</p> <p>Transmit Freq Error 56.348 kHz</p> <p>x dB Bandwidth 35.09 MHz</p> <p>OBW Power 99.00 %</p> <p>x dB -6.00 dB</p>
<p>2437 MHz</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.43700000 GHz</p> <p>Ref Offset 12.1 dB Ref 22.10 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth 35.766 MHz</p> <p>Total Power 25.7 dBm</p> <p>Transmit Freq Error 9.951 kHz</p> <p>x dB Bandwidth 35.08 MHz</p> <p>OBW Power 99.00 %</p> <p>x dB -6.00 dB</p>
<p>2452 MHz</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.45200000 GHz</p> <p>Ref Offset 12.1 dB Ref 22.10 dBm</p> <p>Center 2.452 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth 35.701 MHz</p> <p>Total Power 21.2 dBm</p> <p>Transmit Freq Error -37.722 kHz</p> <p>x dB Bandwidth 35.08 MHz</p> <p>OBW Power 99.00 %</p> <p>x dB -6.00 dB</p>



Test Mode:	Mode 2: IEEE 802.11b Continuous TX mode
Antenna:	ANT-1
2412 MHz	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.412000000 GHz Trig: Free Run #Atten: 20 dB Avg/Hold: >10/10 Radio Std: None Radio Device: BTS</p> <p>Ref Offset: 12.1 dB Ref: 22.10 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 14.980 MHz Total Power 27.0 dBm</p> <p>Transmit Freq Error -30.627 kHz OBW Power 99.00 % x dB Bandwidth 10.08 MHz x dB -6.00 dB</p> <p>Frequency Center Freq 2.412000000 GHz CF Step 3.000000 MHz Freq Offset 0 Hz</p>
2437 MHz	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz Trig: Free Run #Atten: 20 dB Avg/Hold: >10/10 Radio Std: None Radio Device: BTS</p> <p>Ref Offset: 12.1 dB Ref: 22.10 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 15.061 MHz Total Power 27.5 dBm</p> <p>Transmit Freq Error 6.968 kHz OBW Power 99.00 % x dB Bandwidth 10.08 MHz x dB -6.00 dB</p> <p>Frequency Center Freq 2.437000000 GHz CF Step 3.000000 MHz Freq Offset 0 Hz</p>
2462 MHz	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.462000000 GHz Trig: Free Run #Atten: 20 dB Avg/Hold: >10/10 Radio Std: None Radio Device: BTS</p> <p>Ref Offset: 12.1 dB Ref: 22.10 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 15.026 MHz Total Power 27.5 dBm</p> <p>Transmit Freq Error -13.847 kHz OBW Power 99.00 % x dB Bandwidth 10.09 MHz x dB -6.00 dB</p> <p>Frequency Center Freq 2.462000000 GHz CF Step 3.000000 MHz Freq Offset 0 Hz</p>



<p>Test Mode:</p>	<p>Mode 3: IEEE 802.11g Continuous TX mode</p>
<p>Antenna:</p>	<p>ANT-1</p>
<p>2412 MHz</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.41200000 GHz</p> <p>Ref Offset 12.1 dB Ref 22.10 dBm</p> <p>Center 2.412 GHz</p> <p>Occupied Bandwidth 16.576 MHz</p> <p>Total Power 25.6 dBm</p> <p>Transmit Freq Error -27.855 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 15.14 MHz</p> <p>x dB -6.00 dB</p>
<p>2437 MHz</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.43700000 GHz</p> <p>Ref Offset 12.1 dB Ref 22.10 dBm</p> <p>Center 2.437 GHz</p> <p>Occupied Bandwidth 18.231 MHz</p> <p>Total Power 27.5 dBm</p> <p>Transmit Freq Error 19.997 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 15.14 MHz</p> <p>x dB -6.00 dB</p>
<p>2462 MHz</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.46200000 GHz</p> <p>Ref Offset 12.1 dB Ref 22.10 dBm</p> <p>Center 2.462 GHz</p> <p>Occupied Bandwidth 16.352 MHz</p> <p>Total Power 23.2 dBm</p> <p>Transmit Freq Error 1.545 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 15.13 MHz</p> <p>x dB -6.00 dB</p>



Test Mode:	Mode 4: IEEE 802.11n 2.4GHz 20MHz Continuous TX mode
Antenna:	ANT-1
2412 MHz	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.412000000 GHz Trig: Free Run #Atten: 20 dB AvgHld: 10/10 Radio Device: BTS</p> <p>Ref Offset 12.1 dB Ref 22.10 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 17.562 MHz Total Power 24.1 dBm</p> <p>Transmit Freq Error -10.127 kHz x dB Bandwidth 15.13 MHz</p> <p>OBW Power 99.00 % x dB -6.00 dB</p> <p>Frequency Center Freq 2.412000000 GHz CF Step 3.000000 MHz Freq Offset 0 Hz</p>
2437 MHz	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz Trig: Free Run #Atten: 20 dB AvgHld: 10/10 Radio Device: BTS</p> <p>Ref Offset 12.1 dB Ref 22.10 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 18.636 MHz Total Power 27.7 dBm</p> <p>Transmit Freq Error -41.134 kHz x dB Bandwidth 15.13 MHz</p> <p>OBW Power 99.00 % x dB -6.00 dB</p> <p>Frequency Center Freq 2.437000000 GHz CF Step 3.000000 MHz Freq Offset 0 Hz</p>
2462 MHz	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.462000000 GHz Trig: Free Run #Atten: 20 dB AvgHld: 10/10 Radio Device: BTS</p> <p>Ref Offset 12.1 dB Ref 22.10 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 17.506 MHz Total Power 22.9 dBm</p> <p>Transmit Freq Error -4.702 kHz x dB Bandwidth 15.14 MHz</p> <p>OBW Power 99.00 % x dB -6.00 dB</p> <p>Frequency Center Freq 2.462000000 GHz CF Step 3.000000 MHz Freq Offset 0 Hz</p>



Test Mode:	Mode 5: IEEE 802.11n 2.4GHz 40MHz Continuous TX mode
Antenna:	ANT-1
2422 MHz	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.42200000 GHz Trig: Free Run #Atten: 20 dB AvgHld: 10/10 Radio Device: BTS</p> <p>Ref Offset 12.1 dB Ref 22.10 dBm</p> <p>Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Span 50 MHz Sweep 4.8 ms</p> <p>Occupied Bandwidth 35.775 MHz Total Power 21.7 dBm</p> <p>Transmit Freq Error -19.701 kHz OBW Power 99.00 % x dB Bandwidth 35.12 MHz x dB -6.00 dB</p> <p>Center Freq 2.42200000 GHz CF Step 5.000000 MHz Freq Offset 0 Hz</p>
2437 MHz	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz Trig: Free Run #Atten: 20 dB AvgHld: 10/10 Radio Device: BTS</p> <p>Ref Offset 12.1 dB Ref 22.10 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 50 MHz Sweep 4.8 ms</p> <p>Occupied Bandwidth 35.911 MHz Total Power 25.6 dBm</p> <p>Transmit Freq Error 29.808 kHz OBW Power 99.00 % x dB Bandwidth 35.09 MHz x dB -6.00 dB</p> <p>Center Freq 2.437000000 GHz CF Step 5.000000 MHz Freq Offset 0 Hz</p>
2452 MHz	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.452000000 GHz Trig: Free Run #Atten: 20 dB AvgHld: 10/10 Radio Device: BTS</p> <p>Ref Offset 12.1 dB Ref 22.10 dBm</p> <p>Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 50 MHz Sweep 4.8 ms</p> <p>Occupied Bandwidth 35.706 MHz Total Power 21.1 dBm</p> <p>Transmit Freq Error 2.702 kHz OBW Power 99.00 % x dB Bandwidth 35.09 MHz x dB -6.00 dB</p> <p>Center Freq 2.452000000 GHz CF Step 5.000000 MHz Freq Offset 0 Hz</p>

8 Maximum Power Density Measurement

8.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


IEEE 802.11b/g

- * CDD mode : Directional Gain = $10 \cdot \log \left[\frac{10^{G1/20} + 10^{G2/20} + 10^{G3/20}}{N_{ANT}} \right]^2$ = 6.96 dBi > 6dBi
- * CDD mode power limit shall be reduced = $8 - 0.96 = 7.04$ dBm.

IEEE 802.11n 2.4GHz 20MHz/40MHz

- * MIMO mode : Directional Gain = $10 \cdot \log \left\{ \frac{10^{G1/10} + 10^{G2/10} + \dots + 10^{Gn/10}}{N_{ANT}} \right\}$ = 3.96 dBi < 6dBi
- * MIMO mode power limit shall be reduced = $8 - 0 = 8$ dBm.

8.2. Test Setup

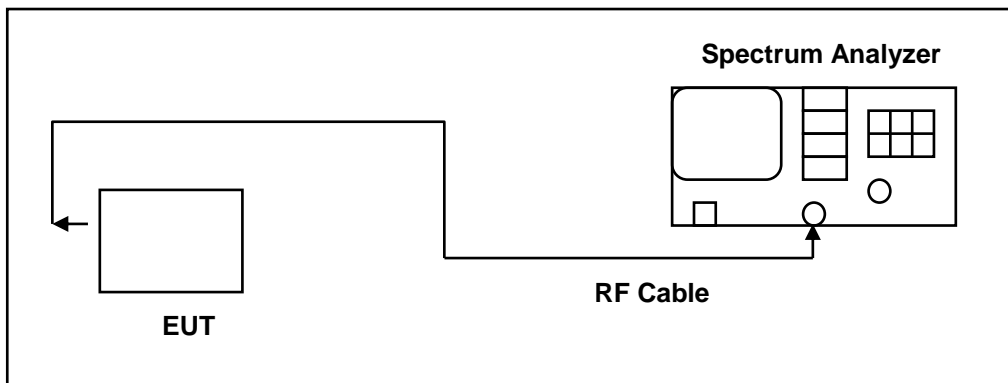

8.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/19/2016	1 year
Microwave Cable	EMCI	EMC104-SM-SM-1500	140303	02/22/2017	1 year
Test Site	ATL	TE05	TE05	N.C.R.	-----

Note: N.C.R. = No Calibration Request.



8.4. Test Procedure

The EUT tested to DTS test procedure of KDB558074D01 section 10.2 Method PKPSD for compliance to FCC 47CFR 15.247 requirements.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



8.5. Test Result

Date of Test	05/04/2017				
Test Mode	Frequency (MHz)	Measurement (dBm/3KHz)			Limit (dBm/3KHz)
		ANT-0	ANT-1	ANT-0+1	
Mode 2	2412	-4.513	-3.253	-0.827	< 7.04
	2437	-3.318	-3.552	-0.423	< 7.04
	2462	-3.649	-6.307	-1.767	< 7.04
Mode 3	2412	-6.661	-5.819	-3.209	< 7.04
	2437	-4.920	-4.550	-1.721	< 7.04
	2462	-6.217	-6.254	-3.225	< 7.04
Mode 4	2412	-8.399	-8.270	-5.324	< 8
	2437	-8.346	-7.866	-5.089	< 8
	2462	-8.203	-8.963	-5.556	< 8
Mode 5	2422	-10.935	-10.181	-7.531	< 8
	2437	-10.645	-10.435	-7.528	< 8
	2452	-10.552	-10.122	-7.321	< 8






8.6. Test Graphs

<p>Test Mode:</p>	<p>Mode 2: IEEE 802.11b Continuous TX mode</p>
<p>Antenna:</p>	<p>ANT-0</p>
<p>2412 MHz</p>	
<p>2437 MHz</p>	
<p>2462 MHz</p>	



<p>Test Mode:</p>	<p>Mode 3: IEEE 802.11g Continuous TX mode</p>
<p>Antenna:</p>	<p>ANT-0</p>
<p>2412 MHz</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Ref Offset 12.1 dB Ref 22.10 dBm</p> <p>Mkr1 2.411 687 775 GHz -6.661 dBm</p> <p>Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 23.00 MHz Sweep 2.427 s (40001 pts)</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.40050000 GHz</p> <p>Stop Freq 2.42350000 GHz</p> <p>CF Step 2.30000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p>
<p>2437 MHz</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Ref Offset 12.1 dB Ref 22.10 dBm</p> <p>Mkr1 2.435 723 500 GHz -4.920 dBm</p> <p>Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 23.00 MHz Sweep 2.427 s (40001 pts)</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42550000 GHz</p> <p>Stop Freq 2.44850000 GHz</p> <p>CF Step 2.30000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p>
<p>2462 MHz</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Ref Offset 12.1 dB Ref 22.10 dBm</p> <p>Mkr1 2.462 343 850 GHz -6.217 dBm</p> <p>Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 23.00 MHz Sweep 2.427 s (40001 pts)</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.45050000 GHz</p> <p>Stop Freq 2.47350000 GHz</p> <p>CF Step 2.30000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p>

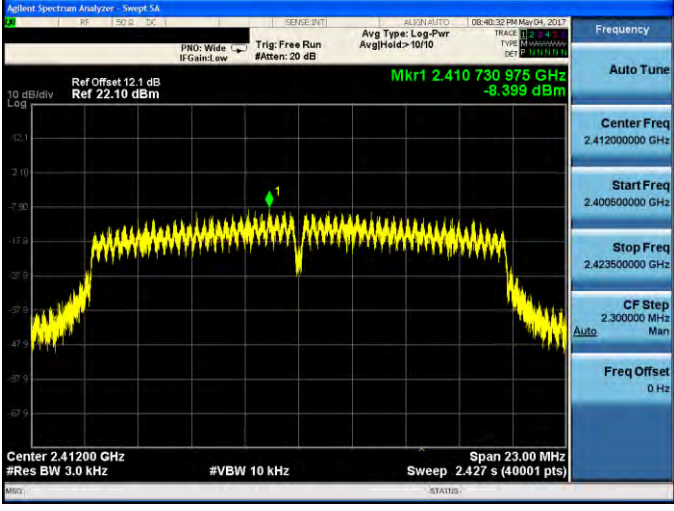
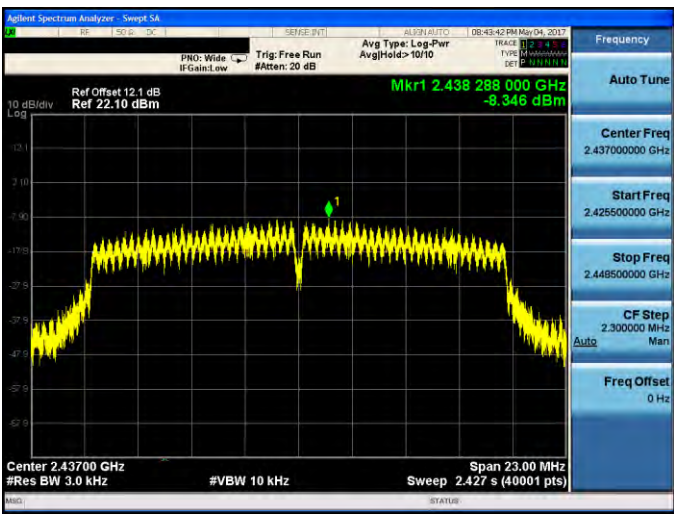
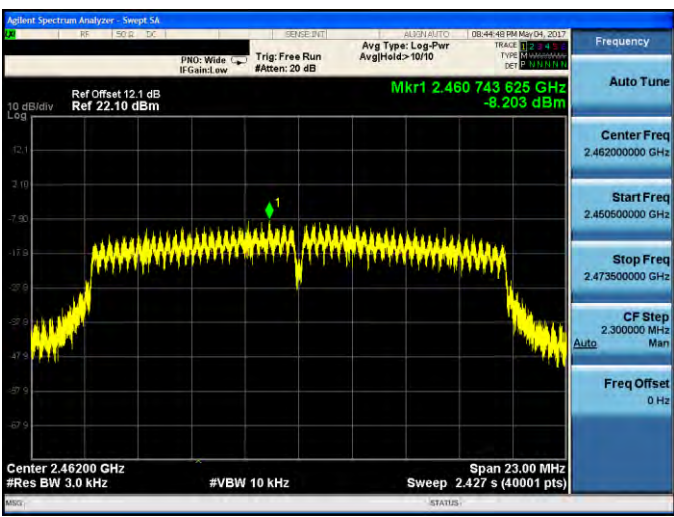


Test Mode:	Mode 4: IEEE 802.11n 2.4GHz 20MHz Continuous TX mode
Antenna:	ANT-0
2412 MHz	
2437 MHz	
2462 MHz	






<p>Test Mode:</p>	<p>Mode 5: IEEE 802.11n 2.4GHz 40MHz Continuous TX mode</p>
<p>Antenna:</p>	<p>ANT-0</p>
<p>2422 MHz</p>	
<p>2437 MHz</p>	
<p>2452 MHz</p>	

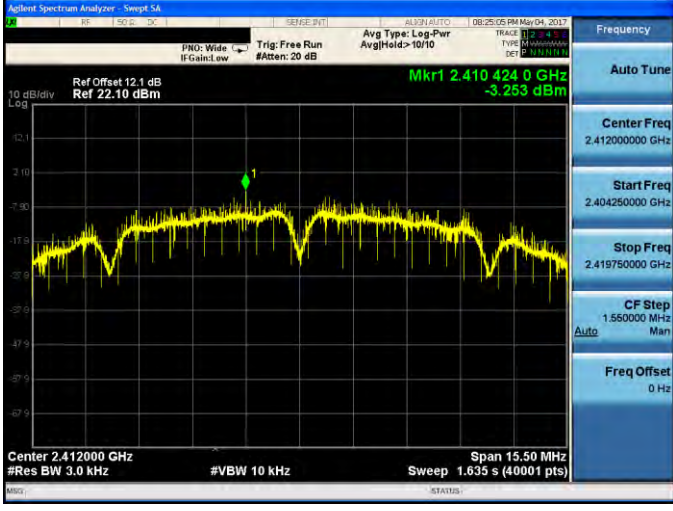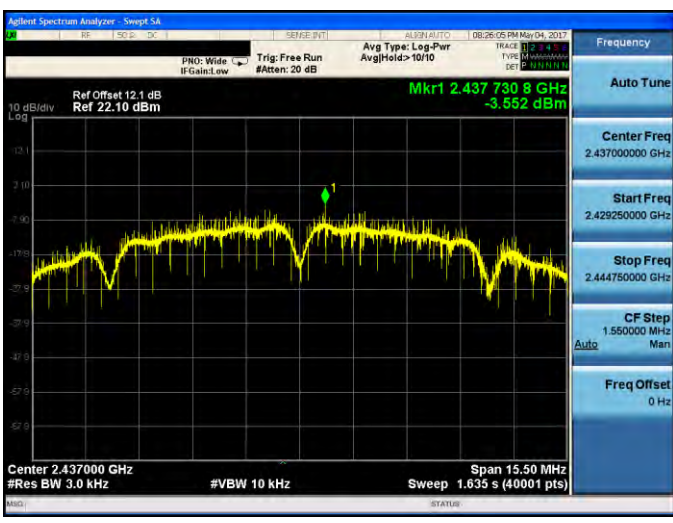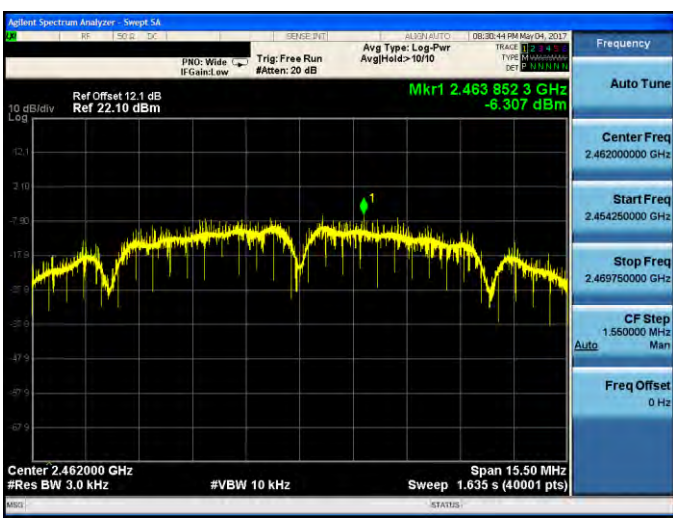

Test Mode:	Mode 2: IEEE 802.11b Continuous TX mode
Antenna:	ANT-1
2412 MHz	
2437 MHz	
2462 MHz	

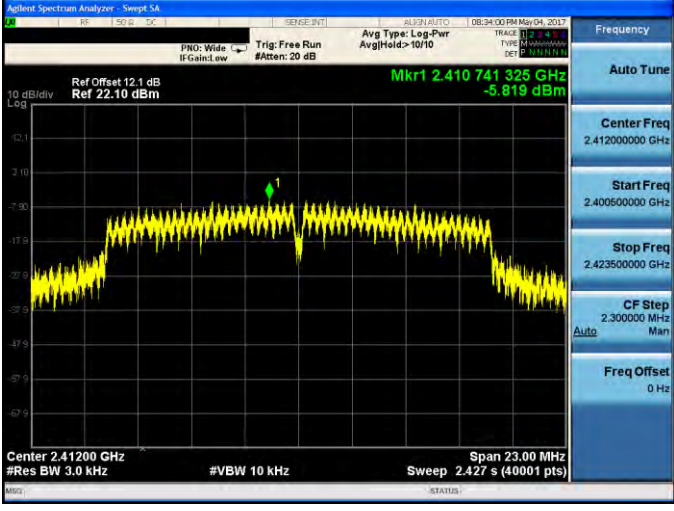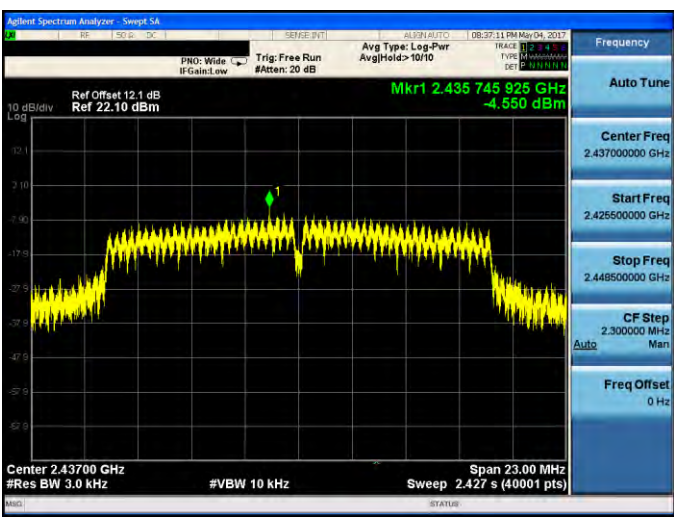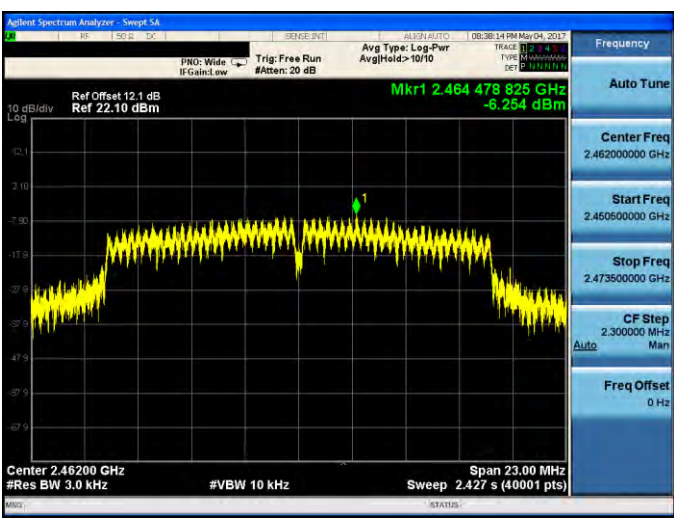

Test Mode:	Mode 3: IEEE 802.11g Continuous TX mode
Antenna:	ANT-1
2412 MHz	
2437 MHz	
2462 MHz	



<p>Test Mode:</p>	<p>Mode 4: IEEE 802.11n 2.4GHz 20MHz Continuous TX mode</p>
<p>Antenna:</p>	<p>ANT-1</p>
<p>2412 MHz</p>	
<p>2437 MHz</p>	
<p>2462 MHz</p>	




Test Mode:	Mode 5: IEEE 802.11n 2.4GHz 40MHz Continuous TX mode
Antenna:	ANT-1
2422 MHz	
2437 MHz	
2452 MHz	

9 Out of Band Conducted Emissions Measurement

9.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

9.2. Test Setup

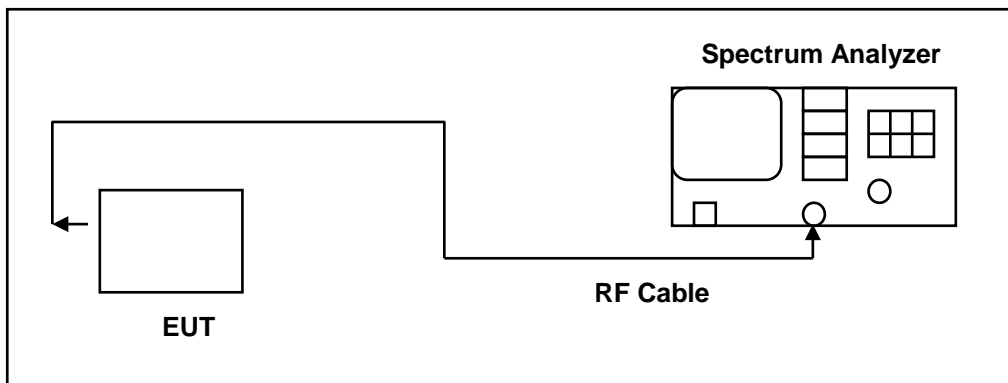

9.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/19/2016	1 year
Spectrum Analyzer	Agilent	E4408B	MY45107753	08/08/2016	1 year
Microwave Cable	EMCI	EMC104-SM-SM-1500	140303	02/22/2017	1 year
Test Site	ATL	TE05	TE05	N.C.R.	-----

Note: N.C.R. = No Calibration Request.

9.4. Test Procedure

In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 30 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band.

The test was performed at 3 channels.



9.5. Test Graphs

Reference level

Test Mode:	Mode 2: IEEE 802.11b Continuous TX mode
Antenna:	ANT-0
2412 MHz	<p>Agilent Spectrum Analyzer - Swept SA Ref Offset 12.1 dB Ref 22.10 dBm Mkr1 2.412 514 8 GHz 11.179 dBm Center 2.412000 GHz #Res BW 100 kHz #VBW 300 kHz Span 15.50 MHz Sweep 2.667 ms (40001 pts)</p>
2437 MHz	<p>Agilent Spectrum Analyzer - Swept SA Ref Offset 12.1 dB Ref 22.10 dBm Mkr1 2.436 495 9 GHz 11.270 dBm Center 2.437000 GHz #Res BW 100 kHz #VBW 300 kHz Span 15.50 MHz Sweep 2.667 ms (40001 pts)</p>
2462 MHz	<p>Agilent Spectrum Analyzer - Swept SA Ref Offset 12.1 dB Ref 22.10 dBm Mkr1 2.461 502 1 GHz 11.401 dBm Center 2.462000 GHz #Res BW 100 kHz #VBW 300 kHz Span 15.50 MHz Sweep 2.667 ms (40001 pts)</p>



Test Mode:	Mode 3: IEEE 802.11g Continuous TX mode
Antenna:	ANT-0
2412 MHz	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Ref Offset 12.1 dB Ref 22.10 dBm</p> <p>Mkr1 2.413 269 025 GHz 10.193 dBm</p> <p>Center 2.41200 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.667 ms (40001 pts)</p> <p>Frequency: Auto Tune Center Freq: 2.41200000 GHz Start Freq: 2.40050000 GHz Stop Freq: 2.42350000 GHz CF Step: 2.300000 MHz Freq Offset: 0 Hz</p>
2437 MHz	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Ref Offset 12.1 dB Ref 22.10 dBm</p> <p>Mkr1 2.438 265 575 GHz 10.871 dBm</p> <p>Center 2.43700 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.667 ms (40001 pts)</p> <p>Frequency: Auto Tune Center Freq: 2.43700000 GHz Start Freq: 2.42550000 GHz Stop Freq: 2.44850000 GHz CF Step: 2.300000 MHz Freq Offset: 0 Hz</p>
2462 MHz	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Ref Offset 12.1 dB Ref 22.10 dBm</p> <p>Mkr1 2.463 259 250 GHz 10.409 dBm</p> <p>Center 2.46200 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.667 ms (40001 pts)</p> <p>Frequency: Auto Tune Center Freq: 2.46200000 GHz Start Freq: 2.45050000 GHz Stop Freq: 2.47350000 GHz CF Step: 2.300000 MHz Freq Offset: 0 Hz</p>



<p>Test Mode:</p>	<p>Mode 4: IEEE 802.11n 2.4GHz 20MHz Continuous TX mode</p>
<p>Antenna:</p>	<p>ANT-0</p>
<p>2412 MHz</p>	
<p>2437 MHz</p>	
<p>2462 MHz</p>	



<p>Test Mode:</p>	<p>Mode 5: IEEE 802.11n 2.4GHz 40MHz Continuous TX mode</p>
<p>Antenna:</p>	<p>ANT-0</p>
<p>2422 MHz</p>	
<p>2437 MHz</p>	
<p>2452 MHz</p>	



Test Mode:	Mode 2: IEEE 802.11b Continuous TX mode
Antenna:	ANT-1
2412 MHz	
2437 MHz	
2462 MHz	



Test Mode:	Mode 3: IEEE 802.11g Continuous TX mode
Antenna:	ANT-1
2412 MHz	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Ref Offset: 12.1 dB Ref: 22.10 dBm</p> <p>Mkr1 2.413 271 325 GHz 10.611 dBm</p> <p>Center 2.41200 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.667 ms (40001 pts)</p> <p>Frequency: 2.41200000 GHz Auto Tune Center Freq: 2.41200000 GHz Start Freq: 2.400500000 GHz Stop Freq: 2.423500000 GHz CF Step: 2.300000 MHz Auto Man Freq Offset: 0 Hz</p>
2437 MHz	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Ref Offset: 12.1 dB Ref: 22.10 dBm</p> <p>Mkr1 2.438 278 225 GHz 10.469 dBm</p> <p>Center 2.43700 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.667 ms (40001 pts)</p> <p>Frequency: 2.43700000 GHz Auto Tune Center Freq: 2.437000000 GHz Start Freq: 2.425500000 GHz Stop Freq: 2.448500000 GHz CF Step: 2.300000 MHz Auto Man Freq Offset: 0 Hz</p>
2462 MHz	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Ref Offset: 12.1 dB Ref: 22.10 dBm</p> <p>Mkr1 2.460 735 575 GHz 10.247 dBm</p> <p>Center 2.46200 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.667 ms (40001 pts)</p> <p>Frequency: 2.46200000 GHz Auto Tune Center Freq: 2.462000000 GHz Start Freq: 2.450500000 GHz Stop Freq: 2.473500000 GHz CF Step: 2.300000 MHz Auto Man Freq Offset: 0 Hz</p>



<p>Test Mode:</p>	<p>Mode 4: IEEE 802.11n 2.4GHz 20MHz Continuous TX mode</p>
<p>Antenna:</p>	<p>ANT-1</p>
<p>2412 MHz</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Ref Offset 12.1 dB Ref 22.10 dBm</p> <p>Mkr1 2.410 743 625 GHz 7.239 dBm</p> <p>Center 2.412000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.667 ms (40001 pts)</p> <p>Frequency: Auto Tune Center Freq: 2.412000000 GHz Start Freq: 2.400500000 GHz Stop Freq: 2.423500000 GHz CF Step: 2.300000 MHz Freq Offset: 0 Hz</p>
<p>2437 MHz</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Ref Offset 12.1 dB Ref 22.10 dBm</p> <p>Mkr1 2.435 740 175 GHz 7.329 dBm</p> <p>Center 2.437000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.667 ms (40001 pts)</p> <p>Frequency: Auto Tune Center Freq: 2.437000000 GHz Start Freq: 2.425500000 GHz Stop Freq: 2.448500000 GHz CF Step: 2.300000 MHz Freq Offset: 0 Hz</p>
<p>2462 MHz</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Ref Offset 12.1 dB Ref 22.10 dBm</p> <p>Mkr1 2.460 744 775 GHz 6.692 dBm</p> <p>Center 2.462000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.667 ms (40001 pts)</p> <p>Frequency: Auto Tune Center Freq: 2.462000000 GHz Start Freq: 2.450500000 GHz Stop Freq: 2.473500000 GHz CF Step: 2.300000 MHz Freq Offset: 0 Hz</p>



<p>Test Mode:</p>	<p>Mode 5: IEEE 802.11n 2.4GHz 40MHz Continuous TX mode</p>
<p>Antenna:</p>	<p>ANT-1</p>
<p>2422 MHz</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>PRG: Fast IF Gain Low Trig: Free Run Avg Type: Log-Pwr #Atten: 20 dB</p> <p>Ref Offset: 12.1 dB Ref: 22.10 dBm</p> <p>Mkr1 2.417 004 8 GHz 7.999 dBm</p> <p>Center 2.42200 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 5.333 ms (40001 pts)</p> <p>Frequency: Auto Tune Center Freq: 2.42200000 GHz Start Freq: 2.39650000 GHz Stop Freq: 2.44850000 GHz CF Step: 5.300000 MHz Freq Offset: 0 Hz</p>
<p>2437 MHz</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>PRG: Fast IF Gain Low Trig: Free Run Avg Type: Log-Pwr #Atten: 20 dB</p> <p>Ref Offset: 12.1 dB Ref: 22.10 dBm</p> <p>Mkr1 2.431 998 1 GHz 7.900 dBm</p> <p>Center 2.43700 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 5.333 ms (40001 pts)</p> <p>Frequency: Auto Tune Center Freq: 2.43700000 GHz Start Freq: 2.41050000 GHz Stop Freq: 2.46350000 GHz CF Step: 5.300000 MHz Freq Offset: 0 Hz</p>
<p>2452 MHz</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>PRG: Fast IF Gain Low Trig: Free Run Avg Type: Log-Pwr #Atten: 20 dB</p> <p>Ref Offset: 12.1 dB Ref: 22.10 dBm</p> <p>Mkr1 2.447 008 7 GHz 8.040 dBm</p> <p>Center 2.45200 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 5.333 ms (40001 pts)</p> <p>Frequency: Auto Tune Center Freq: 2.45200000 GHz Start Freq: 2.42550000 GHz Stop Freq: 2.47850000 GHz CF Step: 5.300000 MHz Freq Offset: 0 Hz</p>



Out of Band Conducted Emissions

<p>Test Mode:</p>	<p>Mode 2: IEEE 802.11b Continuous TX mode</p>
<p>Antenna:</p>	<p>ANT-0</p>
<p>2412 MHz</p>	
<p>2437 MHz</p>	
<p>2462 MHz</p>	



<p>Test Mode:</p>	<p>Mode 3: IEEE 802.11g Continuous TX mode</p>
<p>Antenna:</p>	<p>ANT-0</p>
<p>2412 MHz</p>	
<p>2437 MHz</p>	
<p>2462 MHz</p>	



<p>Test Mode:</p>	<p>Mode 4: IEEE 802.11n 2.4GHz 20MHz Continuous TX mode</p>
<p>Antenna:</p>	<p>ANT-0</p>
<p>2412 MHz</p>	
<p>2437 MHz</p>	
<p>2462 MHz</p>	



Test Mode:	Mode 5: IEEE 802.11n 2.4GHz 40MHz Continuous TX mode																
Antenna:	ANT-0																
2422 MHz	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>PRG: Fast IF Gain Low Trig: Free Run #Atten: 20 dB Avg Type: Leg-Pwr AvgHeld: 10/10</p> <p>Ref Offset 12.1 dB Ref 22.10 dBm Mkr1 2.422 0 GHz -3.242 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.531 s (40001 pts)</p> <table border="1"> <thead> <tr> <th>MFR MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.422 0 GHz</td> <td></td> <td></td> <td>-3.242 dBm</td> </tr> </tbody> </table>	MFR MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.422 0 GHz			-3.242 dBm
MFR MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE										
1	N	1	f	2.422 0 GHz			-3.242 dBm										
2437 MHz	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>PRG: Fast IF Gain Low Trig: Free Run #Atten: 20 dB Avg Type: Leg-Pwr AvgHeld: 10/10</p> <p>Ref Offset 12.1 dB Ref 22.10 dBm Mkr1 2.437 0 GHz -2.467 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.531 s (40001 pts)</p> <table border="1"> <thead> <tr> <th>MFR MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.437 0 GHz</td> <td></td> <td></td> <td>-2.467 dBm</td> </tr> </tbody> </table>	MFR MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.437 0 GHz			-2.467 dBm
MFR MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE										
1	N	1	f	2.437 0 GHz			-2.467 dBm										
2452 MHz	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>PRG: Fast IF Gain Low Trig: Free Run #Atten: 20 dB Avg Type: Leg-Pwr AvgHeld: 10/10</p> <p>Ref Offset 12.1 dB Ref 22.10 dBm Mkr1 2.452 0 GHz -1.652 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.531 s (40001 pts)</p> <table border="1"> <thead> <tr> <th>MFR MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.452 0 GHz</td> <td></td> <td></td> <td>-1.652 dBm</td> </tr> </tbody> </table>	MFR MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.452 0 GHz			-1.652 dBm
MFR MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE										
1	N	1	f	2.452 0 GHz			-1.652 dBm										



Test Mode:	Mode 2: IEEE 802.11b Continuous TX mode
Antenna:	ANT-1
2412 MHz	
2437 MHz	
2462 MHz	



<p>Test Mode:</p>	<p>Mode 3: IEEE 802.11g Continuous TX mode</p>
<p>Antenna:</p>	<p>ANT-1</p>
<p>2412 MHz</p>	
<p>2437 MHz</p>	
<p>2462 MHz</p>	



<p>Test Mode:</p>	<p>Mode 4: IEEE 802.11n 2.4GHz 20MHz Continuous TX mode</p>
<p>Antenna:</p>	<p>ANT-1</p>
<p>2412 MHz</p>	
<p>2437 MHz</p>	
<p>2462 MHz</p>	





<p>Test Mode:</p>	<p>Mode 5: IEEE 802.11n 2.4GHz 40MHz Continuous TX mode</p>
<p>Antenna:</p>	<p>ANT-1</p>
<p>2422 MHz</p>	
<p>2437 MHz</p>	
<p>2452 MHz</p>	





Conducted Band Edge

Test Mode:	Mode 2: IEEE 802.11b Continuous TX mode																																																																																																
Antenna:	ANT-0																																																																																																
2412 MHz	<p>Agilent Spectrum Analyzer - Sweep 5A</p> <p>Ref Offset 12.1 dB Ref 22.10 dBm</p> <p>Mkr2 2.412 517 5 GHz 10.914 dBm</p> <p>Center 2.412000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10.67 ms (40001 pts)</p> <table border="1"> <thead> <tr> <th>MFR MODE</th> <th>TRC</th> <th>SCL</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 000 0 GHz</td> <td></td> <td></td> <td>-26.796 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.412 517 5 GHz</td> <td></td> <td></td> <td>10.914 dBm</td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>11</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MFR MODE	TRC	SCL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.400 000 0 GHz			-26.796 dBm	2	N	1	f	2.412 517 5 GHz			10.914 dBm	3								4								5								6								7								8								9								10								11							
MFR MODE	TRC	SCL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																										
1	N	1	f	2.400 000 0 GHz			-26.796 dBm																																																																																										
2	N	1	f	2.412 517 5 GHz			10.914 dBm																																																																																										
3																																																																																																	
4																																																																																																	
5																																																																																																	
6																																																																																																	
7																																																																																																	
8																																																																																																	
9																																																																																																	
10																																																																																																	
11																																																																																																	
2462 MHz	<p>Agilent Spectrum Analyzer - Sweep 5A</p> <p>Ref Offset 12.1 dB Ref 22.10 dBm</p> <p>Mkr1 2.461 492 5 GHz 7.414 dBm</p> <p>Center 2.462000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10.67 ms (40001 pts)</p> <table border="1"> <thead> <tr> <th>MFR MODE</th> <th>TRC</th> <th>SCL</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.481 492 5 GHz</td> <td></td> <td></td> <td>7.414 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.463 500 0 GHz</td> <td></td> <td></td> <td>-56.196 dBm</td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>11</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MFR MODE	TRC	SCL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.481 492 5 GHz			7.414 dBm	2	N	1	f	2.463 500 0 GHz			-56.196 dBm	3								4								5								6								7								8								9								10								11							
MFR MODE	TRC	SCL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																										
1	N	1	f	2.481 492 5 GHz			7.414 dBm																																																																																										
2	N	1	f	2.463 500 0 GHz			-56.196 dBm																																																																																										
3																																																																																																	
4																																																																																																	
5																																																																																																	
6																																																																																																	
7																																																																																																	
8																																																																																																	
9																																																																																																	
10																																																																																																	
11																																																																																																	

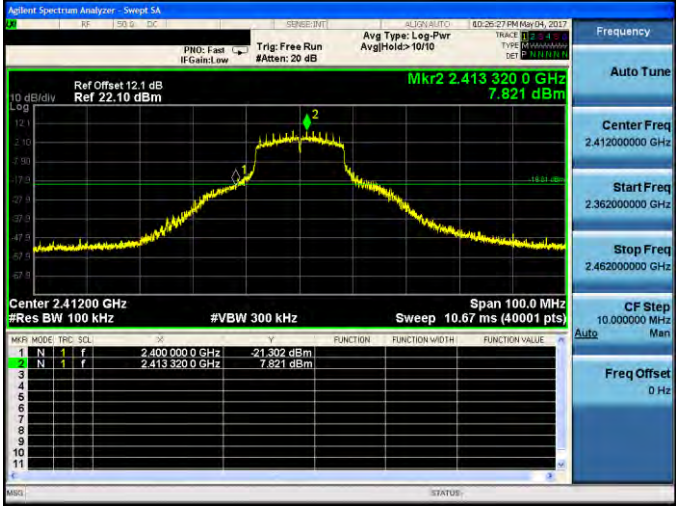
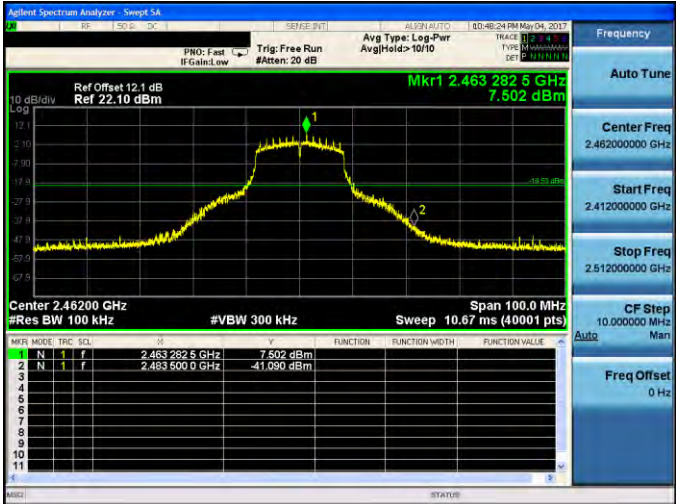


<p>Test Mode:</p>	<p>Mode 3: IEEE 802.11g Continuous TX mode</p>																											
<p>Antenna:</p>	<p>ANT-0</p>																											
<p>2412 MHz</p>	 <table border="1" data-bbox="646 772 1220 929"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 000 0 GHz</td> <td>-21.302 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.413 320 0 GHz</td> <td>7.821 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.400 000 0 GHz	-21.302 dBm				2	N	1	f	2.413 320 0 GHz	7.821 dBm			
MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.400 000 0 GHz	-21.302 dBm																							
2	N	1	f	2.413 320 0 GHz	7.821 dBm																							
<p>2462 MHz</p>	 <table border="1" data-bbox="646 1310 1220 1467"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.463 282 5 GHz</td> <td>7.502 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 0 GHz</td> <td>-41.090 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.463 282 5 GHz	7.502 dBm				2	N	1	f	2.483 500 0 GHz	-41.090 dBm			
MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.463 282 5 GHz	7.502 dBm																							
2	N	1	f	2.483 500 0 GHz	-41.090 dBm																							

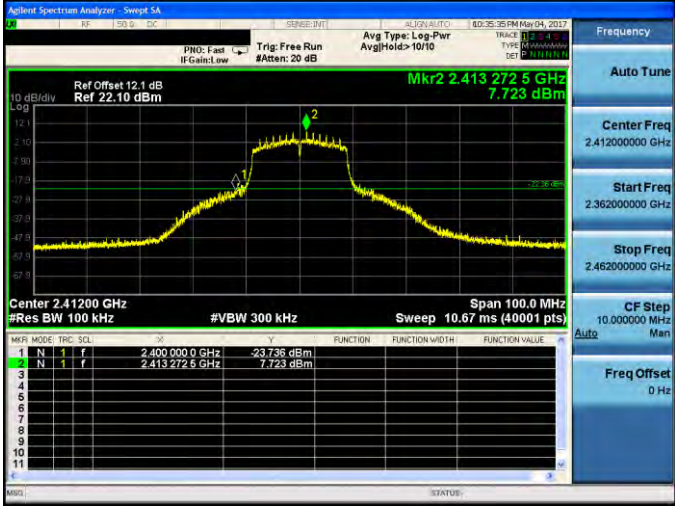
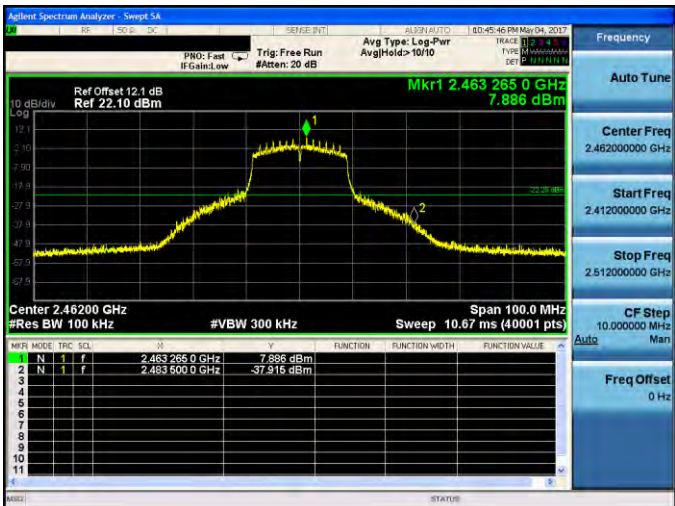


<p>Test Mode:</p>	<p>Mode 4: IEEE 802.11n 2.4GHz 20MHz Continuous TX mode</p>																											
<p>Antenna:</p>	<p>ANT-0</p>																											
<p>2412 MHz</p>	 <table border="1" data-bbox="646 772 1212 929"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400000 GHz</td> <td>-23.736 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4132725 GHz</td> <td>7.723 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.400000 GHz	-23.736 dBm				2	N	1	f	2.4132725 GHz	7.723 dBm			
MKR	MODE	TRC	SQL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.400000 GHz	-23.736 dBm																							
2	N	1	f	2.4132725 GHz	7.723 dBm																							
<p>2462 MHz</p>	 <table border="1" data-bbox="646 1299 1212 1456"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4632650 GHz</td> <td>7.886 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4835000 GHz</td> <td>-37.916 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4632650 GHz	7.886 dBm				2	N	1	f	2.4835000 GHz	-37.916 dBm			
MKR	MODE	TRC	SQL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.4632650 GHz	7.886 dBm																							
2	N	1	f	2.4835000 GHz	-37.916 dBm																							

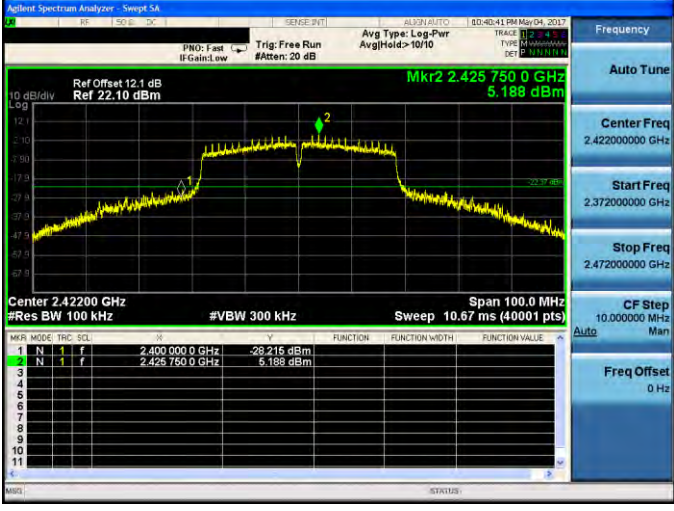
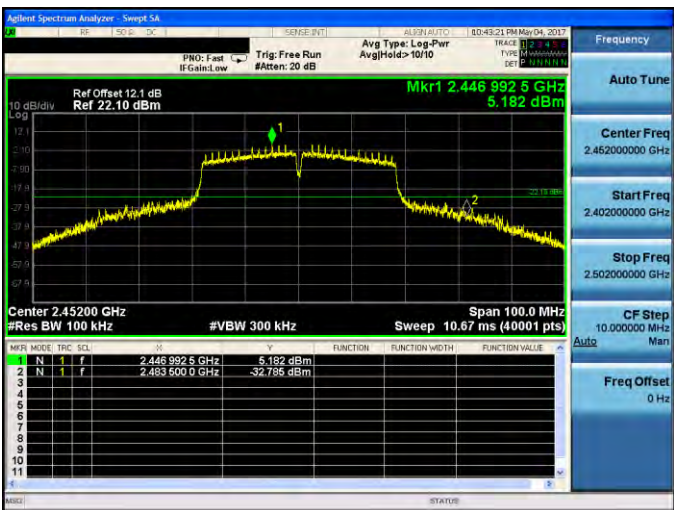


Test Mode:	Mode 5: IEEE 802.11n 2.4GHz 40MHz Continuous TX mode																											
Antenna:	ANT-0																											
2422 MHz	 <table border="1" data-bbox="647 772 1220 929"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400000 GHz</td> <td>-28.215 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.425750 GHz</td> <td>5.188 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.400000 GHz	-28.215 dBm				2	N	1	f	2.425750 GHz	5.188 dBm			
MKR	MODE	TRC	SQL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.400000 GHz	-28.215 dBm																							
2	N	1	f	2.425750 GHz	5.188 dBm																							
2452 MHz	 <table border="1" data-bbox="647 1299 1220 1456"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4469925 GHz</td> <td>5.182 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483500 GHz</td> <td>-32.785 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4469925 GHz	5.182 dBm				2	N	1	f	2.483500 GHz	-32.785 dBm			
MKR	MODE	TRC	SQL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.4469925 GHz	5.182 dBm																							
2	N	1	f	2.483500 GHz	-32.785 dBm																							

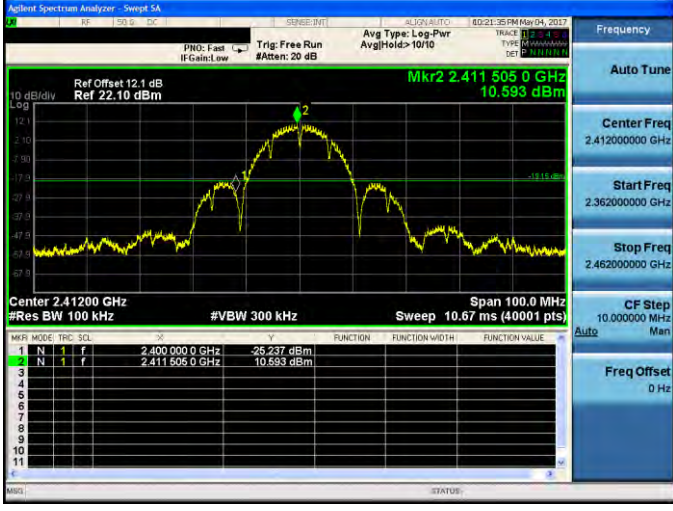
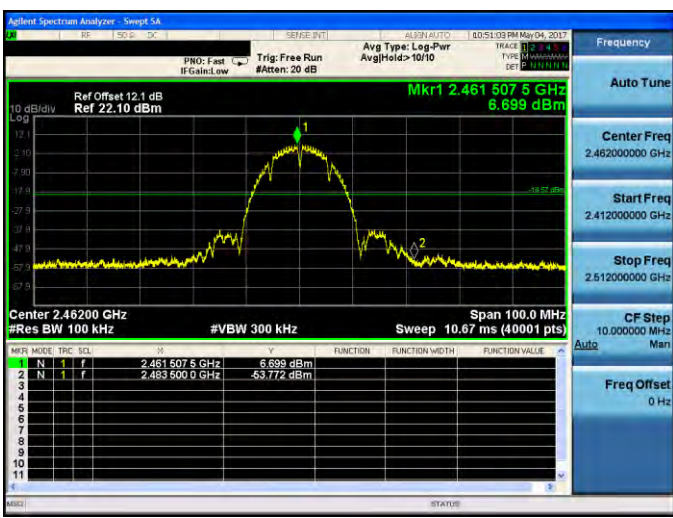


<p>Test Mode:</p>	<p>Mode 2: IEEE 802.11b Continuous TX mode</p>																											
<p>Antenna:</p>	<p>ANT-1</p>																											
<p>2412 MHz</p>	 <table border="1" data-bbox="646 772 1220 929"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400000 GHz</td> <td>-25.237 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.411505 GHz</td> <td>10.593 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.400000 GHz	-25.237 dBm				2	N	1	f	2.411505 GHz	10.593 dBm			
MKR	MODE	TRC	SQL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.400000 GHz	-25.237 dBm																							
2	N	1	f	2.411505 GHz	10.593 dBm																							
<p>2462 MHz</p>	 <table border="1" data-bbox="646 1288 1220 1444"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4615075 GHz</td> <td>6.699 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483500 GHz</td> <td>-53.772 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4615075 GHz	6.699 dBm				2	N	1	f	2.483500 GHz	-53.772 dBm			
MKR	MODE	TRC	SQL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.4615075 GHz	6.699 dBm																							
2	N	1	f	2.483500 GHz	-53.772 dBm																							



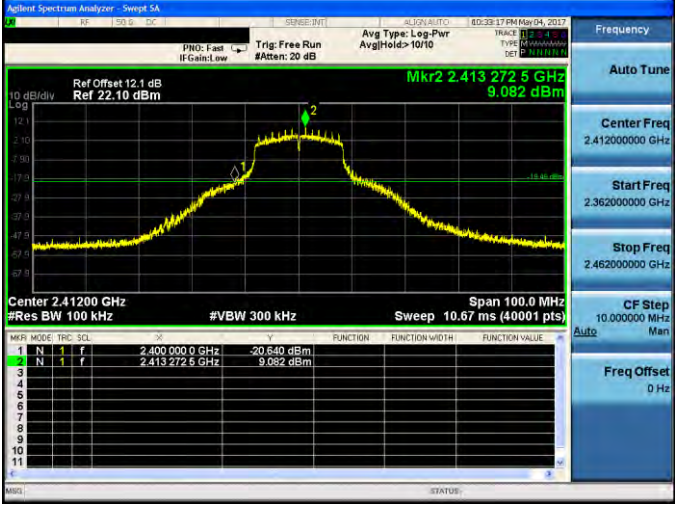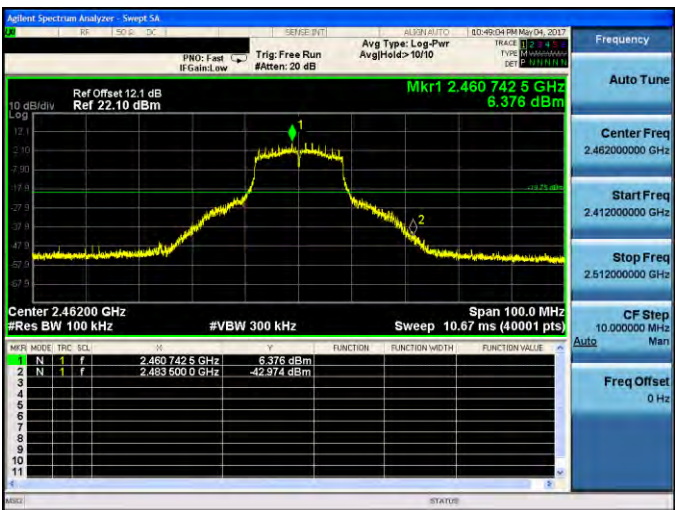

Test Mode:	Mode 3: IEEE 802.11g Continuous TX mode																											
Antenna:	ANT-1																											
2412 MHz	 <table border="1" data-bbox="647 772 1220 929"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4000000 GHz</td> <td>-20.640 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4132725 GHz</td> <td>9.082 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4000000 GHz	-20.640 dBm				2	N	1	f	2.4132725 GHz	9.082 dBm			
MKR	MODE	TRC	SQL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.4000000 GHz	-20.640 dBm																							
2	N	1	f	2.4132725 GHz	9.082 dBm																							
2462 MHz	 <table border="1" data-bbox="647 1299 1220 1456"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4607425 GHz</td> <td>6.376 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4835000 GHz</td> <td>-42.974 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4607425 GHz	6.376 dBm				2	N	1	f	2.4835000 GHz	-42.974 dBm			
MKR	MODE	TRC	SQL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.4607425 GHz	6.376 dBm																							
2	N	1	f	2.4835000 GHz	-42.974 dBm																							

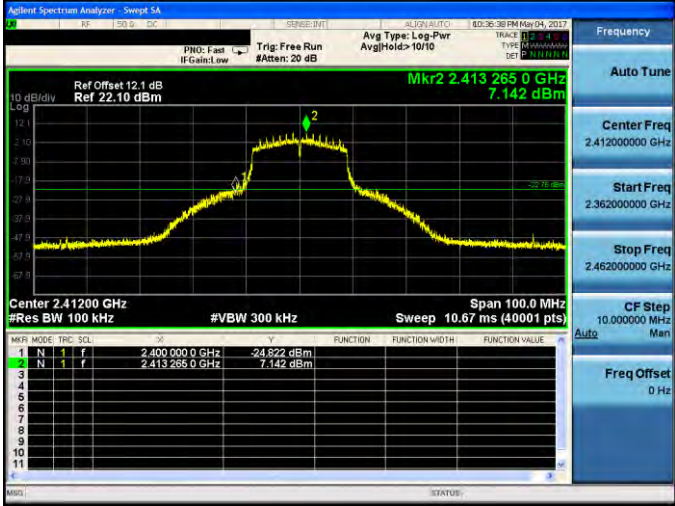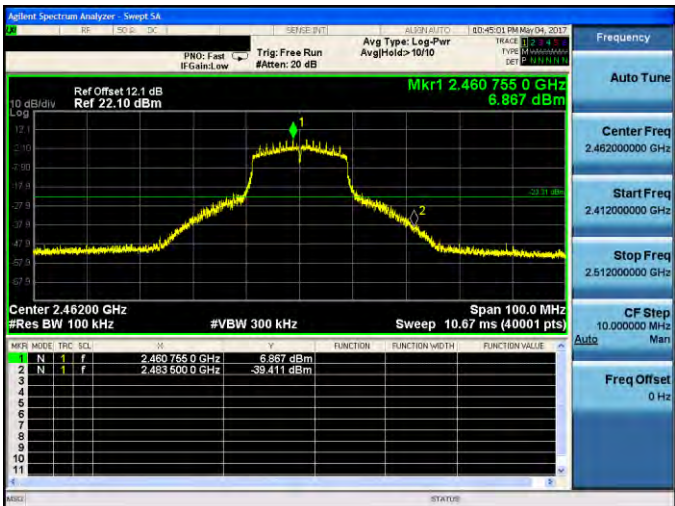

<p>Test Mode:</p>	<p>Mode 4: IEEE 802.11n 2.4GHz 20MHz Continuous TX mode</p>																											
<p>Antenna:</p>	<p>ANT-1</p>																											
<p>2412 MHz</p>	 <table border="1" data-bbox="646 772 1212 929"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400000 GHz</td> <td>-24.822 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.413265 GHz</td> <td>7.142 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.400000 GHz	-24.822 dBm				2	N	1	f	2.413265 GHz	7.142 dBm			
MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.400000 GHz	-24.822 dBm																							
2	N	1	f	2.413265 GHz	7.142 dBm																							
<p>2462 MHz</p>	 <table border="1" data-bbox="646 1299 1212 1456"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.460755 GHz</td> <td>6.887 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483500 GHz</td> <td>-39.411 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.460755 GHz	6.887 dBm				2	N	1	f	2.483500 GHz	-39.411 dBm			
MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.460755 GHz	6.887 dBm																							
2	N	1	f	2.483500 GHz	-39.411 dBm																							



<p>Test Mode:</p>	<p>Mode 5: IEEE 802.11n 2.4GHz 40MHz Continuous TX mode</p>																											
<p>Antenna:</p>	<p>ANT-1</p>																											
<p>2422 MHz</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>PRG: Fast IF Gain Low Trig: Free Run #Atten: 20 dB Avg Type: Leg-Pwr AvgHold: 10/10</p> <p>Ref Offset 12.1 dB Ref 22.10 dBm</p> <p>Mkr2 2.419 502 5 GHz 4.912 dBm</p> <p>Center 2.42200 GHz Span 100.0 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10.67 ms (40001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 000 0 GHz</td> <td>-25.829 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.419 502 5 GHz</td> <td>4.912 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.400 000 0 GHz	-25.829 dBm				2	N	1	f	2.419 502 5 GHz	4.912 dBm			
MKR	MODE	TRC	SQL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.400 000 0 GHz	-25.829 dBm																							
2	N	1	f	2.419 502 5 GHz	4.912 dBm																							
<p>2452 MHz</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>PRG: Fast IF Gain Low Trig: Free Run #Atten: 20 dB Avg Type: Leg-Pwr AvgHold: 10/10</p> <p>Ref Offset 12.1 dB Ref 22.10 dBm</p> <p>Mkr1 2.446 992 5 GHz 4.631 dBm</p> <p>Center 2.45200 GHz Span 100.0 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10.67 ms (40001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.446 992 5 GHz</td> <td>4.631 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 0 GHz</td> <td>-31.586 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.446 992 5 GHz	4.631 dBm				2	N	1	f	2.483 500 0 GHz	-31.586 dBm			
MKR	MODE	TRC	SQL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.446 992 5 GHz	4.631 dBm																							
2	N	1	f	2.483 500 0 GHz	-31.586 dBm																							

10 Antenna Measurement

10.1.Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

10.2.Antenna Description

See section 2 – antenna information.

10.3.DirectionaL Gain Calculated

For Maximum Conducted Output Power

* CDD mode: Directional Gain = $10 \cdot \log\{[10^{G1/10} + 10^{G2/10} + \dots + 10^{Gn/10}] / N_{ANT}\} = 3.96 \text{ dBi} < 6 \text{ dBi}$

* MIMO mode : Directional Gain = $10 \cdot \log\{[10^{G1/10} + 10^{G2/10} + \dots + 10^{Gn/10}] / N_{ANT}\} = 3.96 \text{ dBi} < 6 \text{ dBi}$

Operate Freq. Band	Directional Gain (dBi)
IEEE 802.11b	3.96
IEEE 802.11g	3.96
IEEE 802.11n 2.4GHz 20MHz	3.96
IEEE 802.11n 2.4GHz 40MHz	3.96

For Maximum Power Density

* CDD mode : Directional Gain = $10 \cdot \log\{[10^{G1/20} + 10^{G2/20} + 10^{G3/20}]^2 / N_{ANT}\} = 6.96 \text{ dBi} > 6 \text{ dBi}$

* MIMO mode : Directional Gain = $10 \cdot \log\{[10^{G1/10} + 10^{G2/10} + \dots + 10^{Gn/10}] / N_{ANT}\} = 3.96 \text{ dBi} < 6 \text{ dBi}$

Operate Freq. Band	Directional Gain (dBi)
IEEE 802.11b	6.96
IEEE 802.11g	6.96
IEEE 802.11n 2.4GHz 20MHz	3.96
IEEE 802.11n 2.4GHz 40MHz	3.96