

## RF Exposure Evaluation Declaration

---

**FCC ID:** TE7RE605X

**APPLICANT:** TP-Link Technologies Co., Ltd.

**Application Type:** Certification

**Product:** AX1800 Wi-Fi 6 Range Extender  
AX1750 Wi-Fi 6 Range Extender

**Model No.:** RE605X, RE603X

**Trademark:** tp-link

**FCC Classification:** Digital Transmission System (DTS)  
Unlicensed National Information Infrastructure (NII)

**Test Procedure(s):** KDB 447498 D01v06

**Test Date:** August 08, 2020

**Reviewed By:**



( Paddy Chen )

**Approved By:**



(Chenz Ker)



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standards through the calibration of the equipment and evaluated measurement uncertainty herein.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

### Revision History

Report No.	Version	Description	Issue Date	Note
2007TW0006-U3	Rev. 01	Initial report	08-08-2020	Valid

---

## CONTENTS

Description	Page
<b>1. INTRODUCTION.....</b>	<b>5</b>
1.1. Scope .....	5
1.2. MRT Test Location .....	5
<b>2. PRODUCT INFORMATION.....</b>	<b>6</b>
2.1. Feature of Equipment under Test .....	6
2.2. Description of Available Antennas.....	6
2.3. Description of Antenna RF Port .....	7
<b>3. RF Exposure Evaluation .....</b>	<b>8</b>
3.1. Limits .....	8
3.2. Test Result of RF Exposure Evaluation .....	9
<b>Appendix A - EUT Photograph .....</b>	<b>10</b>

## General Information

<b>Applicant:</b>	TP-Link Technologies Co., Ltd.
<b>Applicant Address:</b>	Building 24 (floors 1,3,4,5) and 28 (floors1-4), Central Science and Technology Park, Nanshan Shenzhen, 518057 China
<b>Manufacturer:</b>	TP-Link Technologies Co., Ltd.
<b>Manufacturer Address:</b>	Building 24 (floors 1,3,4,5) and 28 (floors1-4), Central Science and Technology Park, Nanshan Shenzhen, 518057 China
<b>Test Site:</b>	MRT Technology (Taiwan) Co., Ltd
<b>Test Site Address:</b>	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)

## Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Fuxing Rd., Taoyuan, Taiwan ( R.O.C )

- MRT facility is a FCC registered (Designation No. TW3261) test facility with the site description report on file and is designated by the FCC as an Accredited Test Firm.
- MRT facility is an IC registered (MRT Reg. No. 21723-1) test laboratory with the site description on file at Industry Canada.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (TAF) under the American Association for Laboratory Accreditation Program (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC, Industry Taiwan, EU and TELEC Rules.


## 1. INTRODUCTION

### 1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada and Certification and Engineering Bureau.

### 1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

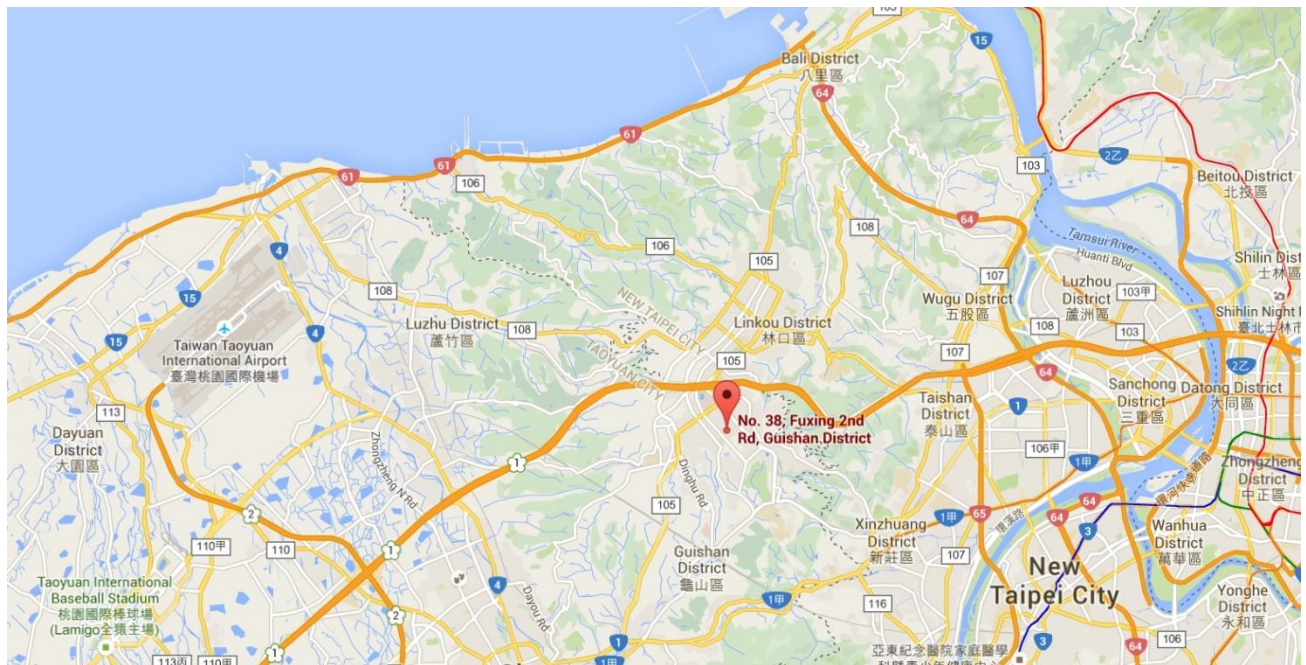

## 2. PRODUCT INFORMATION

### 2.1. Feature of Equipment under Test

Product Name	AX1800 Wi-Fi 6 Range Extender AX1750 Wi-Fi 6 Range Extender
Model No.	RE605X, RE603X
Brand Name:	tp-link
Wi-Fi Specification:	802.11a/b/g/n/ac/ax

Note: There is the same hardware design, PCB layout between the models, different models and product names for different marketing requirements. Only RE605X (Product name: AX1800 Wi-Fi 6 Range Extender) was selected for final tests.

### 2.2. Description of Available Antennas

Antenna Type	Frequency Band (MHz)	T <sub>x</sub> Paths	Number of spatial streams	Max Antenna Gain (dBi)	Beamforming Directional Gain (dBi)	CDD Directional Gain (dBi)	
						For Power	For PSD
Monopole Antenna	2412 ~ 2462	2	1	1.99	5.00	1.99	5.00
	5150 ~ 5250	2	1	1.98	4.99	1.98	4.99
	5250 ~ 5350	2	1	2.99	6.00	2.99	6.00
	5470 ~ 5725	2	1	2.46	5.47	2.46	5.47
	5725 ~ 5850	2	1	2.13	5.14	2.13	5.14


Note 1: The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.

If all antennas have the same gain,  $G_{ANT}$ , Directional gain =  $G_{ANT}$  + Array Gain, where Array Gain is as follows.

- For power spectral density (PSD) measurements on all devices,  
Array Gain =  $10 \log (N_{ANT} / N_{SS})$  dB;
- For power measurements on IEEE 802.11 devices,  
Array Gain = 0 dB for  $N_{ANT} \leq 4$ ;

Note 2: The EUT also supports Beam Forming mode, and the Beam Forming support 802.11ac/ax, not include 802.11a/b/g/n. BF Directional gain =  $G_{ANT} + 10 \log (N_{ANT})$ .

### 2.3. Description of Antenna RF Port

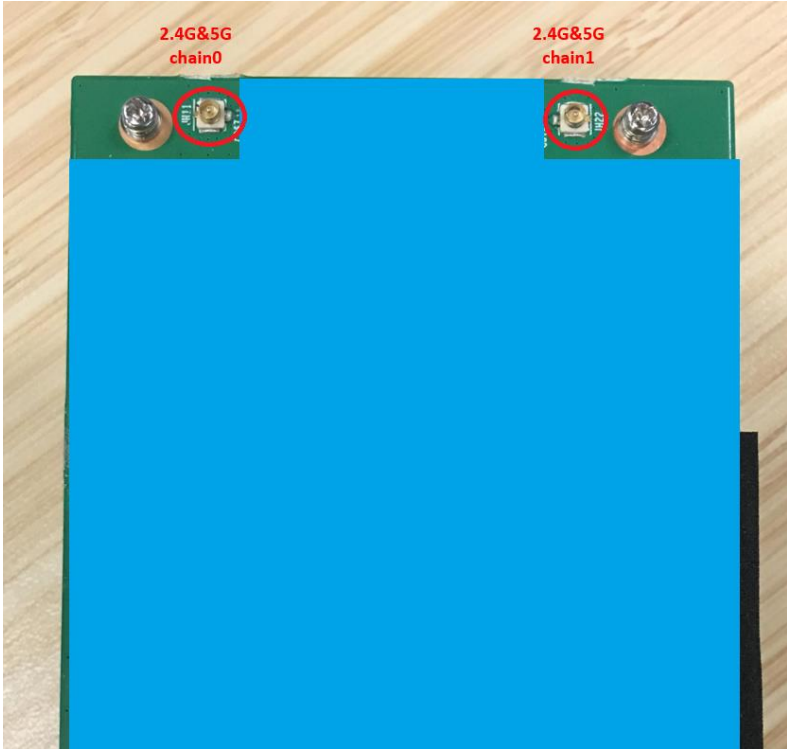Antenna RF Port				
Software Control Port	2.4GHz RF Port		5GHz RF Port	
	Ant 0	Ant 1	Ant 0	Ant 1
				

### 3. RF Exposure Evaluation

#### 3.1. Limits

According to FCC 1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)

##### LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Average Time (Minutes)
(A) Limits for Occupational/ Control Exposures				
300-1500	--	--	f/300	6
1500-100,000	--	--	5	6
(B) Limits for General Population/ Uncontrolled Exposures				
300-1500	--	--	f/1500	6
1500-100,000	--	--	1	30

f= Frequency in MHz

Calculation Formula:  $P_d = (P_{out} * G) / (4 * \pi * r^2)$

Where

$P_d$  = power density in mW/cm<sup>2</sup>

$P_{out}$  = output power to antenna in mW

$G$  = gain of antenna in linear scale

$\pi$  = 3.1416

$r$  = distance between observation point and center of the radiator in cm

$P_d$  is the limit of MPE, 1mW/cm<sup>2</sup>. If we know the maximum gain of the antenna and the total power input to the antenna, through the calculation, we will know the distance  $r$  where the MPE limit is reached.



### 3.2. Test Result of RF Exposure Evaluation

Product	AX1800 Wi-Fi 6 Range Extender
Test Item	RF Exposure Evaluation

Antenna Gain: Refer to clause 1.2.

Test Mode	Frequency Band (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Maximum EIRP (dBm)
802.11b/g/n/ax	2412 ~ 2462	22.69	5.00	27.69
802.11a/n/ac/ax	5180 ~ 5240 5745 ~ 5825	24.96	5.14	30.10

Test Mode	Frequency Band (MHz)	Maximum EIRP (dBm)	Safety Distance (cm)	Power Density (mW/cm <sup>2</sup> )	Limit of Power Density (mW/cm <sup>2</sup> )
802.11b/g/n/ax	2412 ~ 2462	27.69	20	0.1169	1
802.11a/n/ac/ax	5180 ~ 5240 5745 ~ 5825	30.10	20	0.2036	1

#### CONCLUSION:

WLAN 2.4GHz Band and WLAN 5GHz can transmit simultaneously.

The max Power Density at R (20 cm) =  $0.1169\text{mW/cm}^2 + 0.2036\text{mW/cm}^2 = 0.3205\text{mW/cm}^2 < 1\text{mW/cm}^2$ .

So the safety distance is 20cm for device installed without any other radio equipment.

\

\_\_\_\_\_ The End \_\_\_\_\_

## **Appendix A - EUT Photograph**

Refer to "2007TW0006-UE" file.