



A D T

FCC TEST REPORT (15.247)

REPORT NO.: RF140716C24 R1

MODEL NO.: T2UH

FCC ID: TE7T2UH

RECEIVED: Jul. 16, 2014

TESTED: Jul. 28 ~ Aug. 16, 2014

ISSUED: Oct. 01, 2014

APPLICANT: TP-LINK TECHNOLOGIES CO., LTD.

ADDRESS: Building 24 (floors 1,3,4,5) and 28 (floors 1-4)
Central Science and Technology Park, Shennan
Rd, Nanshan, Shenzhen, China

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist.,
New Taipei City, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim
product certification, approval, or endorsement by
TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



A D T

TABLE OF CONTENTS

RELEASE CONTROL RECORD	5
1. CERTIFICATION	6
2. SUMMARY OF TEST RESULTS	7
2.1 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	10
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	11
3.3 DUTY CYCLE OF TEST SIGNAL	15
3.4 DESCRIPTION OF SUPPORT UNITS	17
3.4.1 CONFIGURATION OF SYSTEM UNDER TEST	17
3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS	18
4. TEST TYPES AND RESULTS (FOR 2.4GHz BAND)	19
4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT	19
4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	19
4.1.2 TEST INSTRUMENTS	20
4.1.3 TEST PROCEDURES	21
4.1.4 DEVIATION FROM TEST STANDARD	21
4.1.5 TEST SETUP	22
4.1.6 EUT OPERATING CONDITIONS	23
4.1.7 TEST RESULTS	24
4.2 CONDUCTED EMISSION MEASUREMENT	37
4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	37
4.2.2 TEST INSTRUMENTS	37
4.2.3 TEST PROCEDURES	38
4.2.4 DEVIATION FROM TEST STANDARD	38
4.2.5 TEST SETUP	38
4.2.6 EUT OPERATING CONDITIONS	38
4.2.7 TEST RESULTS	39
4.3 6dB BANDWIDTH MEASUREMENT	41
4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT	41
4.3.2 TEST SETUP	41
4.3.3 TEST INSTRUMENTS	41
4.3.4 TEST PROCEDURE	41
4.3.5 DEVIATION FROM TEST STANDARD	41
4.3.6 EUT OPERATING CONDITIONS	41
4.3.7 TEST RESULTS	42
4.4 CONDUCTED OUTPUT POWER	44
4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	44



A D T

4.4.2	TEST SETUP	44
4.4.3	TEST INSTRUMENTS	44
4.4.4	TEST PROCEDURES.....	44
4.4.5	DEVIATION FROM TEST STANDARD.....	44
4.4.6	EUT OPERATING CONDITIONS	44
4.4.7	TEST RESULTS.....	45
4.5	POWER SPECTRAL DENSITY MEASUREMENT	47
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	47
4.5.2	TEST SETUP	47
4.5.3	TEST INSTRUMENTS	47
4.5.4	TEST PROCEDURE	47
4.5.5	DEVIATION FROM TEST STANDARD.....	48
4.5.6	EUT OPERATING CONDITION.....	48
4.5.7	TEST RESULTS.....	49
4.6	CONDUCTED OUT OF BAND EMISSION MEASUREMENT.....	51
4.6.1	LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT	51
4.6.2	TEST SETUP	51
4.6.3	TEST INSTRUMENTS	51
4.6.4	TEST PROCEDURE	52
4.6.5	DEVIATION FROM TEST STANDARD.....	52
4.6.6	EUT OPERATING CONDITION.....	52
4.6.7	TEST RESULTS.....	52
5.	TEST TYPES AND RESULTS (FOR 5.0GHz BAND).....	57
5.1	RADIATED EMISSION MEASUREMENT	57
5.1.1	LIMITS OF RADIATED EMISSION MEASUREMENT	57
5.1.2	TEST INSTRUMENTS	58
5.1.3	TEST PROCEDURES.....	58
5.1.4	DEVIATION FROM TEST STANDARD.....	58
5.1.5	TEST SETUP	58
5.1.6	EUT OPERATING CONDITIONS	58
5.1.7	TEST RESULTS.....	59
5.2	CONDUCTED EMISSION MEASUREMENT	69
5.2.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	69
5.2.2	TEST INSTRUMENTS	69
5.2.3	TEST PROCEDURES.....	69
5.2.4	DEVIATION FROM TEST STANDARD.....	69
5.2.5	TEST SETUP	69
5.2.6	EUT OPERATING CONDITIONS	69
5.2.7	TEST RESULTS.....	70
5.3	6dB BANDWIDTH MEASUREMENT	72
5.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	72



A D T

5.3.2 TEST SETUP	72
5.3.3 TEST INSTRUMENTS	72
5.3.4 TEST PROCEDURE	72
5.3.5 DEVIATION FROM TEST STANDARD	72
5.3.6 EUT OPERATING CONDITIONS	72
5.3.7 TEST RESULTS	73
5.4 CONDUCTED OUTPUT POWER	75
5.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	75
5.4.2 TEST SETUP	75
5.4.3 INSTRUMENTS	75
5.4.4 TEST PROCEDURES	76
5.4.5 DEVIATION FROM TEST STANDARD	76
5.4.6 EUT OPERATING CONDITIONS	76
5.4.7 TEST RESULTS	77
5.5 POWER SPECTRAL DENSITY MEASUREMENT	79
5.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	79
5.5.2 TEST SETUP	79
5.5.3 TEST INSTRUMENTS	79
5.5.4 TEST PROCEDURE	79
5.5.5 DEVIATION FROM TEST STANDARD	79
5.5.6 EUT OPERATING CONDITION	79
5.5.7 TEST RESULTS	80
5.6 CONDUCTED OUT OF BAND EMISSION MEASUREMENT	82
5.6.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT	82
5.6.2 TEST SETUP	82
5.6.3 TEST INSTRUMENTS	82
5.6.4 TEST PROCEDURE	82
5.6.5 DEVIATION FROM TEST STANDARD	82
5.6.6 EUT OPERATING CONDITION	82
5.6.7 TEST RESULTS	82
6. PHOTOGRAPHS OF THE TEST CONFIGURATION	87
7. INFORMATION ON THE TESTING LABORATORIES	88
8. APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	89



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF140716C24	Original release.	Aug. 25, 2014
RF140716C24 R1	Update output power.	Oct. 01, 2014



A D T

1. CERTIFICATION

PRODUCT: AC600 High Gain Wireless Dual Band USB Adapter

MODEL NO.: T2UH

BRAND: TP-LINK

APPLICANT: TP-LINK TECHNOLOGIES CO., LTD.

TESTED: Jul. 28 ~ Aug. 16, 2014

TEST SAMPLE: Prototype

STANDARDS: FCC Part 15, Subpart C (Section 15.247)

ANSI C63.10-2009

The above equipment (model: T2UH) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Suntee Liu , **DATE :** Oct. 01, 2014

Suntee Liu / Specialist

APPROVED BY : Ken Liu , **DATE :** Oct. 01, 2014

Ken Liu / Senior Manager



A D T

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -6.33dB at 2.17000MHz.
15.205 & 209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -0.1dB at 2483.50MHz.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -0.1dB at 2483.50MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is SMA Female Reverse not a standard connector.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.19 dB
	200MHz ~1000MHz	3.21 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



A D T

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	AC600 High Gain Wireless Dual Band USB Adapter
MODEL NO.	T2UH
POWER SUPPLY	5Vdc (host equipment)
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 256QAM, 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b:11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps 802.11a: 54/48/36/24/18/12/9/6Mbps 802.11n: up to 150Mbps 802.11ac: up to 433.3Mbps
OPERATING FREQUENCY	2.4GHz: 2412 ~ 2462MHz 5.0GHz: 5745 ~ 5825MHz
NUMBER OF CHANNEL	2.4GHz: 802.11b, 802.11g, 802.11n (HT20): 11 802.11n (HT40): 7 5.0GHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 5 802.11n (HT40), 802.11ac (VHT40): 2 802.11ac (VHT80): 1
OUTPUT POWER	2.4GHz: 226.464mW 5.0GHz: 209.411mW
ANTENNA TYPE	2.4GHz: Dipole antenna with 1dBi gain 5.0GHz: Dipole antenna with 3dBi gain
ANTENNA CONNECTOR	SMA Female Reverse
DATA CABLE	NA
I/O PORTS	Refer to user's manual
ACCESSORY DEVICES	NA



A D T

NOTE:

1. Physically, the EUT provides 1 completed transmitter and 1 receiver.

MODULATION MODE	TX FUNCTION
802.11b	1TX
802.11g	1TX
802.11a	1TX
802.11n (HT20)	1TX
802.11n (HT40)	1TX
802.11ac (VHT80)	1TX

*The modulation and bandwidth are similar for 802.11n mode for 20MHz/40MHz and 802.11ac mode for 20MHz/40MHz, therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

2. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.



A D T

3.2 DESCRIPTION OF TEST MODES

FOR 2.4GHz:

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

FOR 5.0GHz (5745 ~ 5825MHz):

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz		

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
151	5755MHz	159	5795MHz

1 channel is provided for 802.11ac (VHT80):

CHANNEL	FREQUENCY
155	5775MHz



A D T

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

FOR 2.4GHz:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where

RE≥1G: Radiated Emission above 1GHz

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

NOTE: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on X-plane.

RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	7.2
-	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	15.0

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11g	1 to 11	6	OFDM	BPSK	6.0

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11g	1 to 11	6	OFDM	BPSK	6.0



A D T

BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
-	802.11n (HT20)	1 to 11	1, 11	OFDM	BPSK	7.2
-	802.11n (HT40)	3 to 9	3, 9	OFDM	BPSK	15.0

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	7.2
-	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	15.0

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
RE≥1G	26deg. C, 64%RH	120Vac, 60Hz	Alan Wu
RE<1G	25deg. C, 65%RH	120Vac, 60Hz	Chris Lin
PLC	23deg. C, 74%RH	120Vac, 60Hz	Brad Tung
APCM	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui



A D T

FOR 5.0GHz (5745 ~ 5825MHz):

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where

RE≥1G: Radiated Emission above 1GHz

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

NOTE: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on Z-plane.

RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6.0
-	802.11n (HT20)	149 to 165	149, 157, 165	OFDM	BPSK	7.2
-	802.11n (HT40)	151 to 159	151, 159	OFDM	BPSK	15.0
-	802.11ac (VHT80)	155	155	OFDM	BPSK	29.3

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11a	149 to 165	157	OFDM	BPSK	6.0

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11a	149 to 165	157	OFDM	BPSK	6.0



A D T

BANDEdge MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11a	149 to 165	149, 165	OFDM	BPSK	6.0
-	802.11n (HT20)	149 to 165	149, 165	OFDM	BPSK	7.2
-	802.11n (HT40)	151 to 159	151, 159	OFDM	BPSK	15.0
-	802.11ac (VHT80)	155	155	OFDM	BPSK	29.3

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6.0
-	802.11n (HT20)	149 to 165	149, 157, 165	OFDM	BPSK	7.2
-	802.11n (HT40)	151 to 159	151, 159	OFDM	BPSK	15.0
-	802.11ac (VHT80)	155	155	OFDM	BPSK	29.3

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
RE≥1G	25deg. C, 65%RH	120Vac, 60Hz	Chris Lin
RE<1G	25deg. C, 65%RH	120Vac, 60Hz	Chris Lin
PLC	23deg. C, 74%RH	120Vac, 60Hz	Brad Tung
APCM	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui



A D T

3.3 DUTY CYCLE OF TEST SIGNAL


For 2.4GHz Band:

802.11b: Duty cycle of test signal is > 98 %

802.11g: Duty cycle of test signal is > 98 %

802.11n (HT20): Duty cycle of test signal is > 98 %

802.11n (HT40): Duty cycle of test signal is > 98 %

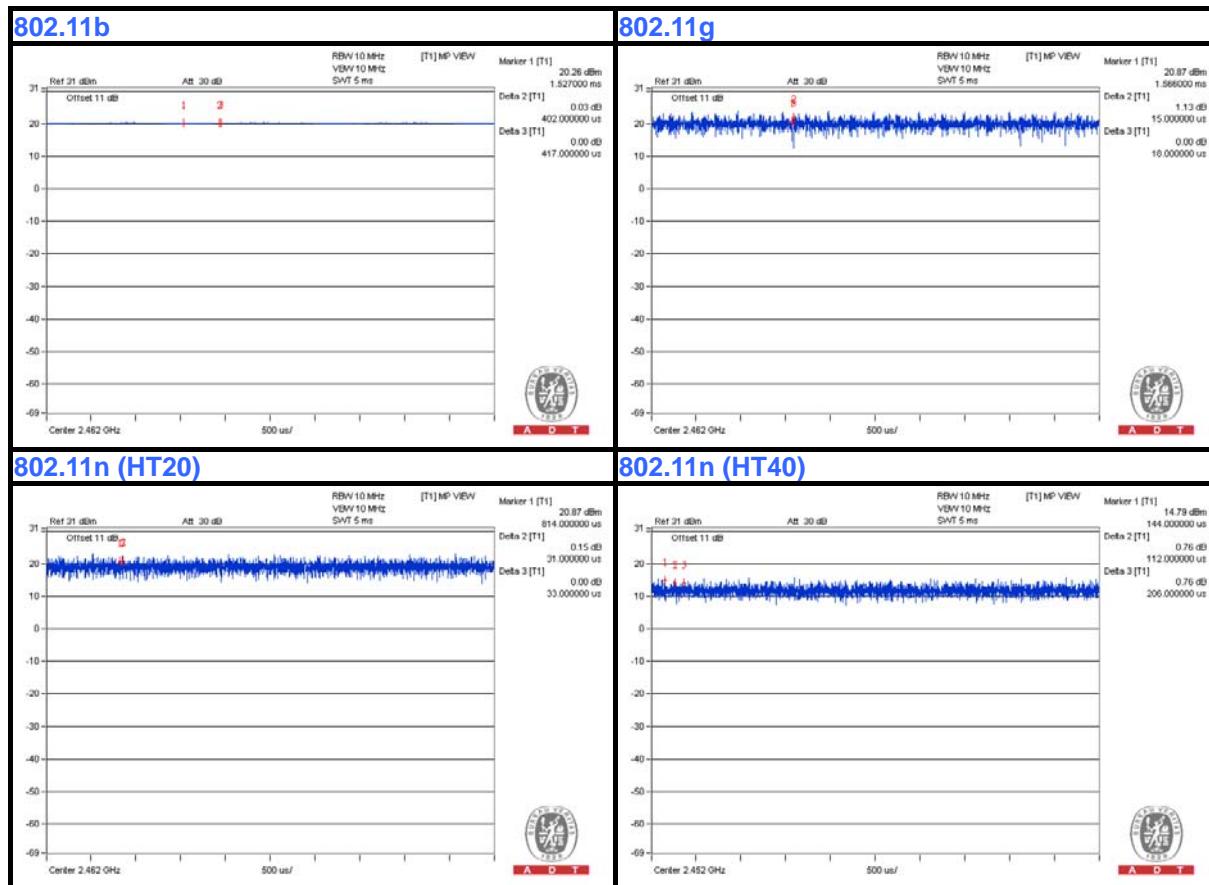



A D T


For 5GHz Band:

802.11a: Duty cycle of test signal is > 98 %

802.11n (HT20): Duty cycle of test signal is > 98 %

802.11n (HT40): Duty cycle of test signal is > 98 %

802.11ac (VHT80): Duty cycle of test signal is > 98 %

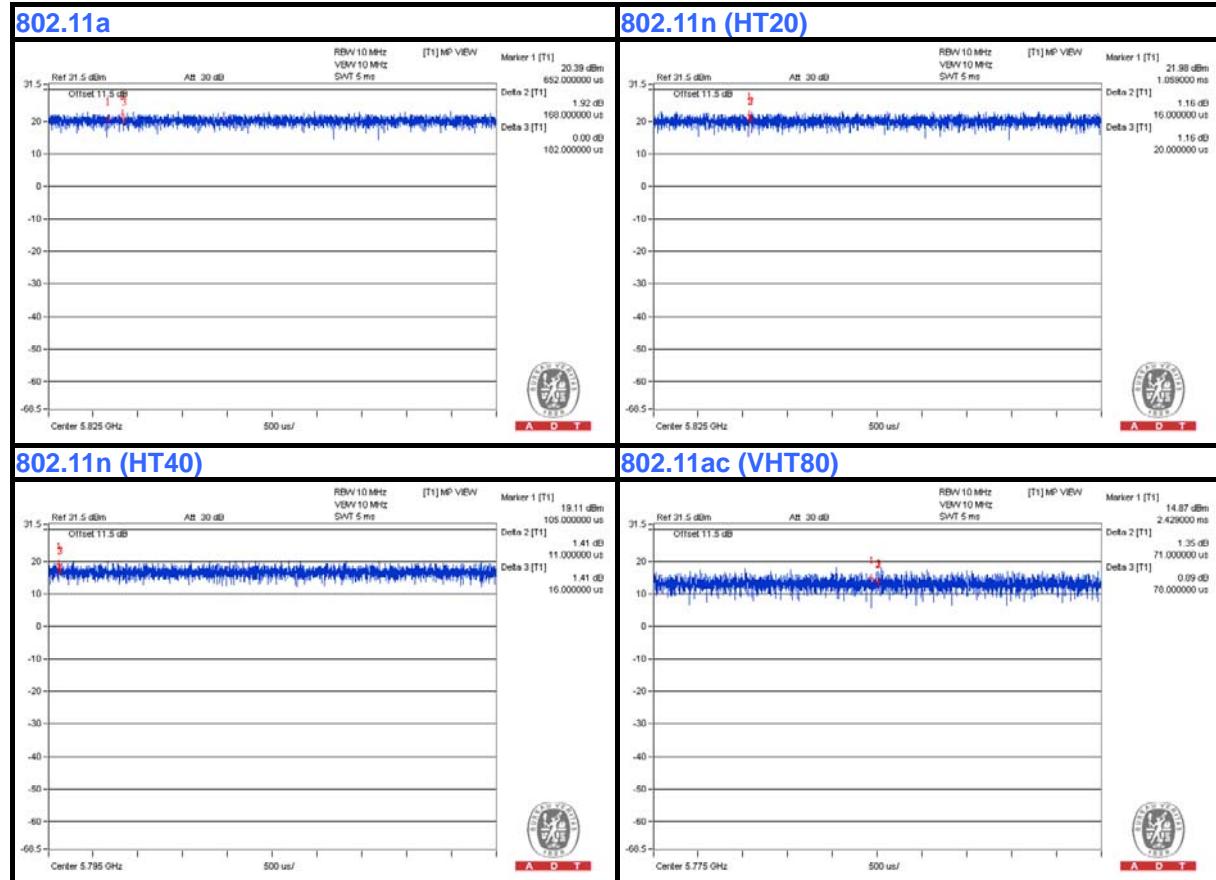



A D T

3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Notebook	DELL	D531	CN-0XM006-48643-8 1U-2610	QDS-BRCM1020

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	1.8m USB cable

NOTE: All power cords of the above support units are non-shielded (1.8m).

3.4.1 CONFIGURATION OF SYSTEM UNDER TEST

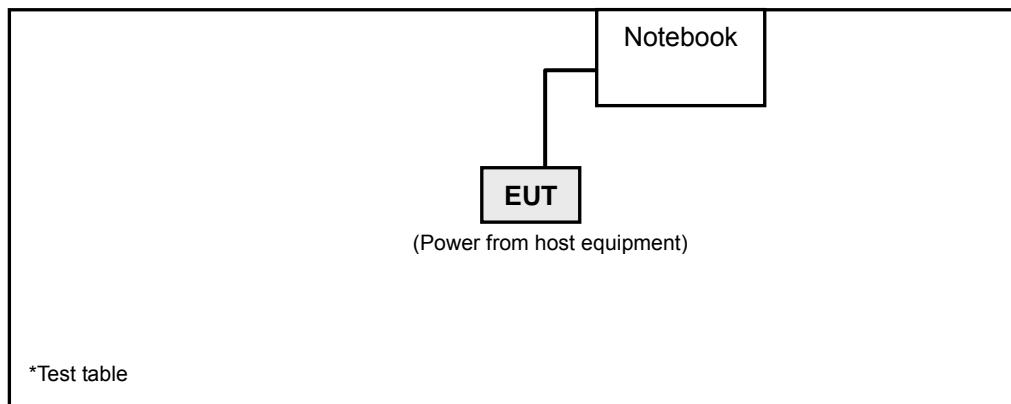



A D T

3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

558074 D01 DTS Meas Guidance v03r02

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



A D T

4. TEST TYPES AND RESULTS (FOR 2.4GHz BAND)

4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB_{uV}/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUe DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCI	100424	Sep. 09, 2013	Sep. 08, 2014
Spectrum Analyzer ROHDE & SCHWARZ	FSU 43	100115	Dec. 18, 2013	Dec. 17, 2014
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Feb. 26, 2014	Feb. 25, 2015
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-404	Jan. 05, 2014	Jan. 04, 2015
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Feb. 17, 2014	Feb. 16, 2015
Loop Antenna	HFH2-Z2	100070	Mar. 06, 2014	Mar. 05, 2016
Preamplifier Agilent	8449B	3008A01961	Oct. 28, 2013	Oct. 27, 2014
Preamplifier Agilent	8447D	2944A10738	Oct. 18, 2013	Oct. 17, 2014
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	309220/4	Aug. 26, 2013	Aug. 25, 2014
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250724/4	Aug. 26, 2013	Aug. 25, 2014
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	295012/4	Aug. 26, 2013	Aug. 25, 2014
Software BV ADT	ADT_Radiated_ V7.6.15.9.4	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	019303	NA	NA
Turn Table BV ADT	TT100.	TT93021704	NA	NA
Turn Table Controller BV ADT	SC100.	SC93021704	NA	NA
26GHz ~ 40GHz Amplifier	EM26400	815221	Oct. 18, 2013	Oct. 17, 2014
High Speed Peak Power Meter	ML2495A	0824011	Jul. 26, 2014	Jul. 25, 2015
Power Sensor	MA2411B	0738171	Jul. 26, 2014	Jul. 25, 2015

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The calibration interval of the loop antenna is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. The test was performed in HwaYa Chamber 4.
 4. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 5. The FCC Site Registration No. is 460141.
 6. The IC Site Registration No. is IC7450F-4.



A D T

4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz(Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD


No deviation.

4.1.5 TEST SETUP

Frequency range 30MHz~1GHz

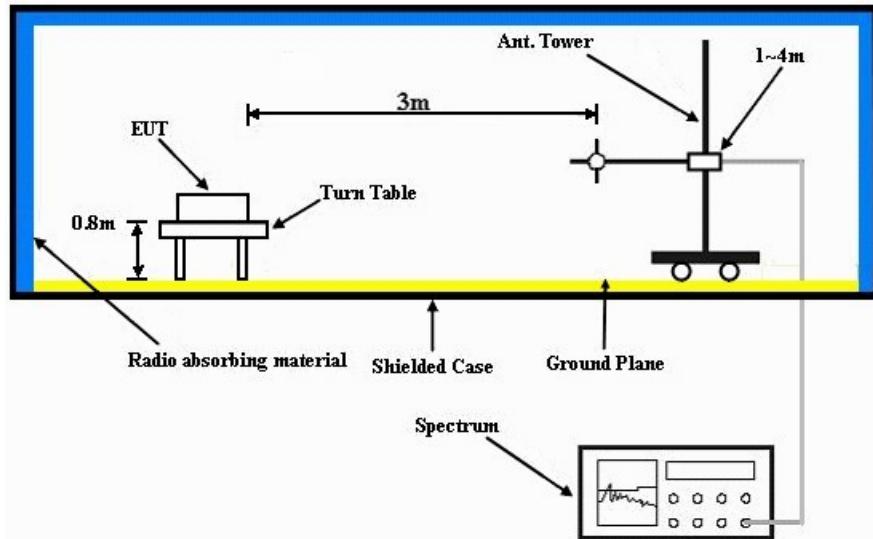

Frequency range above 1GHz

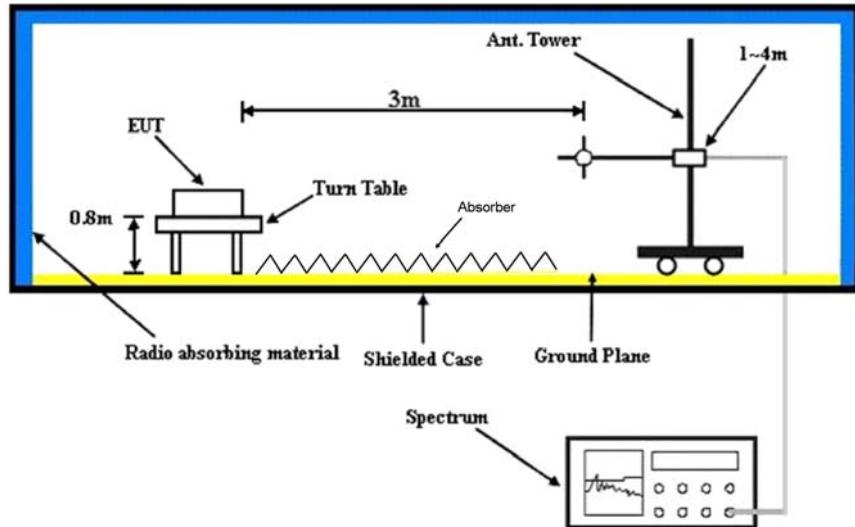

For the actual test configuration, please refer to the attached file (Test Setup Photo).



A D T

4.1.6 EUT OPERATING CONDITIONS

- a. Connected the EUT with a notebook through a USB cable and placed on a testing table.
- b. The notebook ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.



A D T

4.1.7 TEST RESULTS

ABOVE 1GHz DATA :

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.6 PK	74.0	-18.4	1.06 H	219	23.60	32.00
2	2390.00	44.9 AV	54.0	-9.1	1.06 H	219	12.90	32.00
3	*2412.00	102.9 PK			1.06 H	217	70.90	32.00
4	*2412.00	99.1 AV			1.06 H	217	67.10	32.00
5	4824.00	48.4 PK	74.0	-25.6	1.00 H	225	43.20	5.20
6	4824.00	41.4 AV	54.0	-12.6	1.00 H	225	36.20	5.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.9 PK	74.0	-17.1	1.16 V	202	24.90	32.00
2	2390.00	46.4 AV	54.0	-7.6	1.16 V	202	14.40	32.00
3	*2412.00	108.5 PK			1.18 V	208	76.50	32.00
4	*2412.00	104.8 AV			1.18 V	208	72.80	32.00
5	4824.00	49.5 PK	74.0	-24.5	1.00 V	355	44.30	5.20
6	4824.00	42.2 AV	54.0	-11.8	1.00 V	355	37.00	5.20

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	101.6 PK			1.32 H	240	69.50	32.10
2	*2437.00	97.7 AV			1.32 H	240	65.60	32.10
3	4874.00	48.8 PK	74.0	-25.2	1.00 H	221	43.50	5.30
4	4874.00	41.7 AV	54.0	-12.3	1.00 H	221	36.40	5.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	108.4 PK			1.16 V	183	76.30	32.10
2	*2437.00	104.7 AV			1.16 V	183	72.60	32.10
3	4874.00	49.6 PK	74.0	-24.4	1.00 V	3	44.30	5.30
4	4874.00	42.8 AV	54.0	-11.2	1.00 V	3	37.50	5.30

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
 - Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	102.0 PK			1.03 H	222	69.70	32.30
2	*2462.00	98.3 AV			1.03 H	222	66.00	32.30
3	2483.50	56.0 PK	74.0	-18.0	1.07 H	225	23.60	32.40
4	2483.50	44.1 AV	54.0	-9.9	1.07 H	225	11.70	32.40
5	4924.00	49.2 PK	74.0	-24.8	1.00 H	222	43.80	5.40
6	4924.00	42.3 AV	54.0	-11.7	1.00 H	222	36.90	5.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	108.7 PK			1.18 V	213	76.40	32.30
2	*2462.00	104.8 AV			1.18 V	213	72.50	32.30
3	2483.50	56.4 PK	74.0	-17.6	1.19 V	211	24.00	32.40
4	2483.50	44.7 AV	54.0	-9.3	1.19 V	211	12.30	32.40
5	4924.00	50.1 PK	74.0	-23.9	1.00 V	358	44.70	5.40
6	4924.00	43.0 AV	54.0	-11.0	1.00 V	358	37.60	5.40

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.1 PK	74.0	-6.9	1.07 H	210	35.10	32.00
2	2390.00	51.2 AV	54.0	-2.8	1.07 H	210	19.20	32.00
3	*2412.00	104.4 PK			1.07 H	217	72.40	32.00
4	*2412.00	95.2 AV			1.07 H	217	63.20	32.00
5	4824.00	49.2 PK	74.0	-24.8	1.00 H	227	44.00	5.20
6	4824.00	36.9 AV	54.0	-17.1	1.00 H	227	31.70	5.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.9 PK	74.0	-4.1	1.13 V	207	37.90	32.00
2	2390.00	53.3 AV	54.0	-0.7	1.13 V	207	21.30	32.00
3	*2412.00	110.2 PK			1.18 V	208	78.20	32.00
4	*2412.00	100.8 AV			1.18 V	208	68.80	32.00
5	4824.00	50.0 PK	74.0	-24.0	1.00 V	10	44.80	5.20
6	4824.00	37.0 AV	54.0	-17.0	1.00 V	10	31.80	5.20

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	105.5 PK			1.06 H	222	73.40	32.10
2	*2437.00	96.1 AV			1.06 H	222	64.00	32.10
3	4874.00	49.9 PK	74.0	-24.1	1.00 H	228	44.60	5.30
4	4874.00	37.3 AV	54.0	-16.7	1.00 H	228	32.00	5.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	111.0 PK			1.17 V	179	78.90	32.10
2	*2437.00	101.3 AV			1.17 V	179	69.20	32.10
3	4874.00	50.7 PK	74.0	-23.3	1.00 V	3	45.40	5.30
4	4874.00	37.6 AV	54.0	-16.4	1.00 V	3	32.30	5.30

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
 - Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	104.4 PK			1.05 H	214	72.10	32.30
2	*2462.00	95.2 AV			1.05 H	214	62.90	32.30
3	2483.50	70.0 PK	74.0	-4.0	1.02 H	217	37.60	32.40
4	2483.50	50.9 AV	54.0	-3.1	1.02 H	217	18.50	32.40
5	4924.00	48.8 PK	74.0	-25.2	1.00 H	225	43.40	5.40
6	4924.00	36.3 AV	54.0	-17.7	1.00 H	225	30.90	5.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	110.4 PK			1.15 V	169	78.10	32.30
2	*2462.00	100.9 AV			1.15 V	169	68.60	32.30
3	2483.50	73.3 PK	74.0	-0.7	1.15 V	161	40.90	32.40
4	2483.50	53.9 AV	54.0	-0.1	1.15 V	161	21.50	32.40
5	4924.00	49.9 PK	74.0	-24.1	1.00 V	14	44.50	5.40
6	4924.00	37.5 AV	54.0	-16.5	1.00 V	14	32.10	5.40

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

802.11n (HT20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	72.7 PK	74.0	-1.3	1.03 H	218	40.70	32.00
2	2390.00	52.3 AV	54.0	-1.7	1.03 H	218	20.30	32.00
3	*2412.00	104.4 PK			1.07 H	213	72.40	32.00
4	*2412.00	94.8 AV			1.07 H	213	62.80	32.00
5	4824.00	48.6 PK	74.0	-25.4	1.00 H	221	43.40	5.20
6	4824.00	36.3 AV	54.0	-17.7	1.00 H	221	31.10	5.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	72.3 PK	74.0	-1.7	1.47 V	195	40.30	32.00
2	2390.00	53.4 AV	54.0	-0.6	1.47 V	195	21.40	32.00
3	*2412.00	110.2 PK			1.48 V	199	78.20	32.00
4	*2412.00	100.5 AV			1.48 V	199	68.50	32.00
5	4824.00	49.1 PK	74.0	-24.9	1.00 V	2	43.90	5.20
6	4824.00	36.8 AV	54.0	-17.2	1.00 V	2	31.60	5.20

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
 - Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	105.0 PK			1.07 H	212	72.90	32.10
2	*2437.00	95.4 AV			1.07 H	212	63.30	32.10
3	4874.00	49.7 PK	74.0	-24.3	1.00 H	226	44.40	5.30
4	4874.00	37.0 AV	54.0	-17.0	1.00 H	226	31.70	5.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	111.3 PK			1.16 V	196	79.20	32.10
2	*2437.00	101.7 AV			1.16 V	196	69.60	32.10
3	4874.00	50.3 PK	74.0	-23.7	1.00 V	8	45.00	5.30
4	4874.00	37.4 AV	54.0	-16.6	1.00 V	8	32.10	5.30

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
 - Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	103.5 PK			1.04 H	212	71.20	32.30
2	*2462.00	93.9 AV			1.04 H	212	61.60	32.30
3	2483.50	68.8 PK	74.0	-5.2	1.04 H	219	36.40	32.40
4	2483.50	50.2 AV	54.0	-3.8	1.04 H	219	17.80	32.40
5	4924.00	48.2 PK	74.0	-25.8	1.00 H	223	42.80	5.40
6	4924.00	35.8 AV	54.0	-18.2	1.00 H	223	30.40	5.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	109.5 PK			1.15 V	162	77.20	32.30
2	*2462.00	100.0 AV			1.15 V	162	67.70	32.30
3	2483.50	73.3 PK	74.0	-0.7	1.18 V	168	40.90	32.40
4	2483.50	53.5 AV	54.0	-0.5	1.18 V	168	21.10	32.40
5	4924.00	49.2 PK	74.0	-24.8	1.00 V	16	43.80	5.40
6	4924.00	36.7 AV	54.0	-17.3	1.00 V	16	31.30	5.40

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

802.11n (HT40)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.0 PK	74.0	-6.0	1.02 H	215	36.00	32.00
2	2390.00	52.8 AV	54.0	-1.2	1.02 H	215	20.80	32.00
3	*2422.00	97.4 PK			1.07 H	213	65.30	32.10
4	*2422.00	88.3 AV			1.07 H	213	56.20	32.10
5	4844.00	47.8 PK	74.0	-26.2	1.00 H	223	42.50	5.30
6	4844.00	34.8 AV	54.0	-19.2	1.00 H	223	29.50	5.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.6 PK	74.0	-4.4	1.45 V	200	37.60	32.00
2	2390.00	53.8 AV	54.0	-0.2	1.45 V	200	21.80	32.00
3	*2422.00	103.2 PK			1.49 V	204	71.10	32.10
4	*2422.00	93.9 AV			1.49 V	204	61.80	32.10
5	4844.00	48.7 PK	74.0	-25.3	1.00 V	5	43.40	5.30
6	4844.00	35.4 AV	54.0	-18.6	1.00 V	5	30.10	5.30

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
 - Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.6 PK	74.0	-9.4	1.00 H	214	32.60	32.00
2	2390.00	48.8 AV	54.0	-5.2	1.00 H	214	16.80	32.00
3	*2437.00	99.7 PK			1.06 H	213	67.60	32.10
4	*2437.00	90.4 AV			1.06 H	213	58.30	32.10
5	2483.50	63.5 PK	74.0	-10.5	1.04 H	210	31.10	32.40
6	2483.50	48.9 AV	54.0	-5.1	1.04 H	210	16.50	32.40
7	4874.00	48.6 PK	74.0	-25.4	1.00 H	224	43.30	5.30
8	4874.00	35.7 AV	54.0	-18.3	1.00 H	224	30.40	5.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.2 PK	74.0	-5.8	1.18 V	196	36.20	32.00
2	2390.00	50.9 AV	54.0	-3.1	1.18 V	196	18.90	32.00
3	*2437.00	107.3 PK			1.17 V	198	75.20	32.10
4	*2437.00	97.1 AV			1.17 V	198	65.00	32.10
5	2483.50	70.4 PK	74.0	-3.6	1.16 V	198	38.00	32.40
6	2483.50	53.2 AV	54.0	-0.8	1.16 V	198	20.80	32.40
7	4874.00	49.4 PK	74.0	-24.6	1.00 V	2	44.10	5.30
8	4874.00	36.4 AV	54.0	-17.6	1.00 V	2	31.10	5.30

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	96.9 PK			1.04 H	213	64.60	32.30
2	*2452.00	87.5 AV			1.04 H	213	55.20	32.30
3	2483.50	63.1 PK	74.0	-10.9	1.07 H	210	30.70	32.40
4	2483.50	50.7 AV	54.0	-3.3	1.07 H	210	18.30	32.40
5	4904.00	47.2 PK	74.0	-26.8	1.00 H	227	41.80	5.40
6	4904.00	34.3 AV	54.0	-19.7	1.00 H	227	28.90	5.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	102.5 PK			1.16 V	161	70.20	32.30
2	*2452.00	93.2 AV			1.16 V	161	60.90	32.30
3	2483.50	66.2 PK	74.0	-7.8	1.15 V	162	33.80	32.40
4	2483.50	53.7 AV	54.0	-0.3	1.15 V	162	21.30	32.40
5	4904.00	48.3 PK	74.0	-25.7	1.00 V	7	42.90	5.40
6	4904.00	35.5 AV	54.0	-18.5	1.00 V	7	30.10	5.40

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

BELOW 1GHz WORST-CASE DATA:**802.11g**

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	43.51	33.4 QP	40.0	-6.6	1.26 H	300	48.10	-14.70
2	99.89	29.8 QP	43.5	-13.7	1.00 H	212	48.60	-18.80
3	166.00	42.3 QP	43.5	-1.2	2.00 H	302	56.30	-14.00
4	265.16	31.3 QP	46.0	-14.7	1.51 H	16	44.80	-13.50
5	527.64	31.7 QP	46.0	-14.3	1.26 H	5	39.50	-7.80
6	900.94	33.8 QP	46.0	-12.2	1.00 H	16	34.20	-0.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	45.45	33.1 QP	40.0	-6.9	1.24 V	352	47.80	-14.70
2	99.89	28.5 QP	43.5	-15.0	1.24 V	16	47.30	-18.80
3	166.00	31.3 QP	43.5	-12.2	2.00 V	295	45.30	-14.00
4	265.16	31.3 QP	46.0	-14.7	1.50 V	4	44.80	-13.50
5	374.04	28.4 QP	46.0	-17.6	1.50 V	219	39.10	-10.70
6	527.64	30.8 QP	46.0	-15.2	1.24 V	16	38.60	-7.80

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

NOTE: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100289	Nov. 29, 2013	Nov. 28, 2014
RF signal cable Woken	5D-FB	Cable-HYC01-01	Dec. 27, 2013	Dec. 26, 2014
LISN ROHDE & SCHWARZ (EUT)	ESH3-Z5	835239/001	Feb. 13, 2014	Feb. 12, 2015
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Jul. 21, 2014	Jul. 20, 2015
Software ADT	BV ADT_Cond_V7.3.7.3	NA	NA	NA

Notes: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 1.
3. The VCCI Site Registration No. is C-2040.

4.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

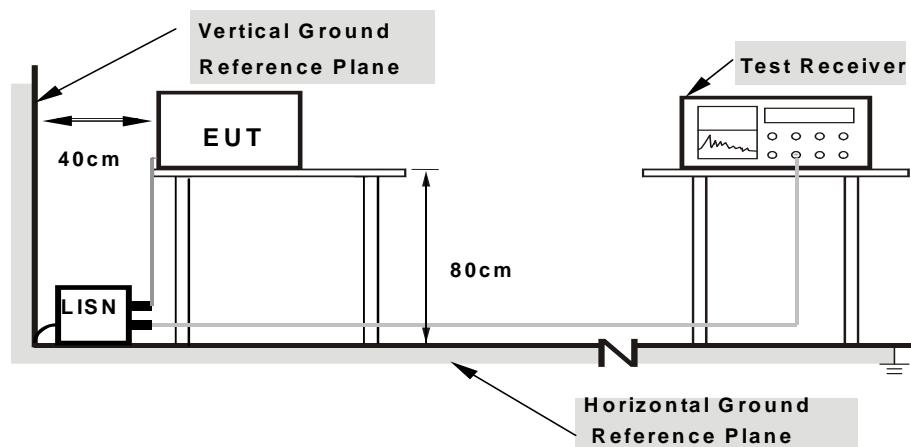

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.


4.2.7 TEST RESULTS

CONDUCTED WORST-CASE DATA : 802.11g

PHASE	Line 1	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17384	0.08	50.77	43.21	50.85	43.29	64.77	54.77	-13.93	-11.49
2	0.45800	0.08	36.93	31.31	37.01	31.39	56.73	46.73	-19.72	-15.34
3	1.88600	0.15	42.77	38.76	42.92	38.91	56.00	46.00	-13.08	-7.09
4	2.17000	0.16	43.50	39.51	43.66	39.67	56.00	46.00	-12.34	-6.33
5	3.95000	0.23	38.01	22.23	38.24	22.46	56.00	46.00	-17.76	-23.54
6	15.09000	0.78	30.31	24.91	31.09	25.69	60.00	50.00	-28.91	-24.31

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

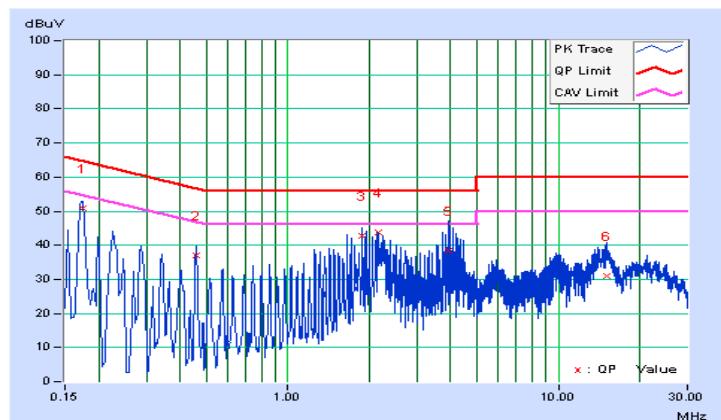




A D T

PHASE	Line 2	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq.	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17400	0.05	53.00	45.25	53.05	45.30	64.77	54.77	-11.72	-9.47
2	0.22600	0.05	44.38	35.05	44.43	35.10	62.60	52.60	-18.16	-17.49
3	0.34200	0.06	40.92	31.47	40.98	31.53	59.15	49.15	-18.17	-17.62
4	2.22600	0.15	41.56	38.00	41.71	38.15	56.00	46.00	-14.29	-7.85
5	4.11000	0.21	44.52	33.14	44.73	33.35	56.00	46.00	-11.27	-12.65
6	14.95000	0.67	35.36	29.88	36.03	30.55	60.00	50.00	-23.97	-19.45

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

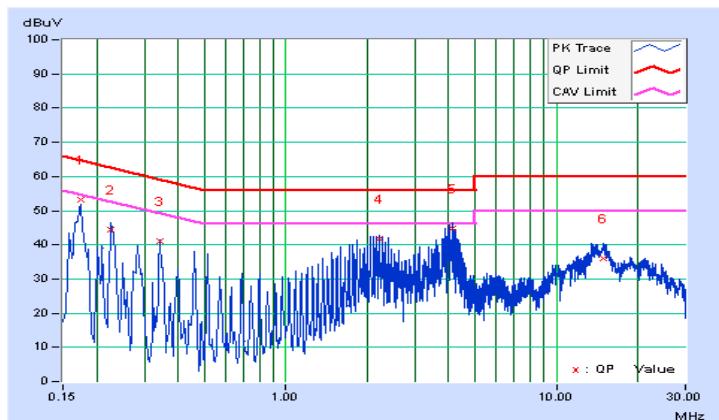




A D T

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST SETUP

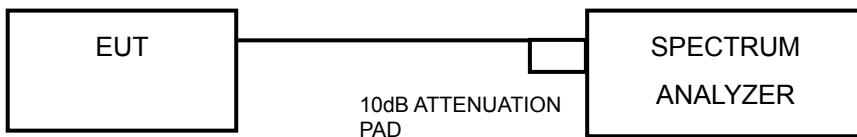

4.3.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.3.4 TEST PROCEDURE

558074 D01 DTS Meas Guidance v03r02 section 8.1

- a. Set RBW = 100 kHz.
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c. Detector = Peak.
- d. Trace mode = max hold.
- e. Sweep = auto couple.
- f. Allow the trace to stabilize.
- g. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

4.3.5 DEVIATION FROM TEST STANDARD

No deviation.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



A D T

4.3.7 TEST RESULTS

802.11b

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	10.08	0.5	PASS
6	2437	10.08	0.5	PASS
11	2462	10.06	0.5	PASS

802.11g

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.55	0.5	PASS
6	2437	16.49	0.5	PASS
11	2462	16.46	0.5	PASS

802.11n (HT20)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	17.66	0.5	PASS
6	2437	17.63	0.5	PASS
11	2462	17.64	0.5	PASS

802.11n (HT40)


CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
3	2422	36.50	0.5	PASS
6	2437	36.52	0.5	PASS
9	2452	36.51	0.5	PASS




A D T

SPECTRUM PLOT OF WORST VALUE


802.11b

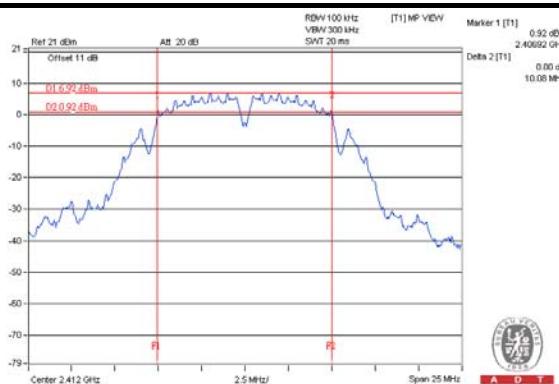


802.11g

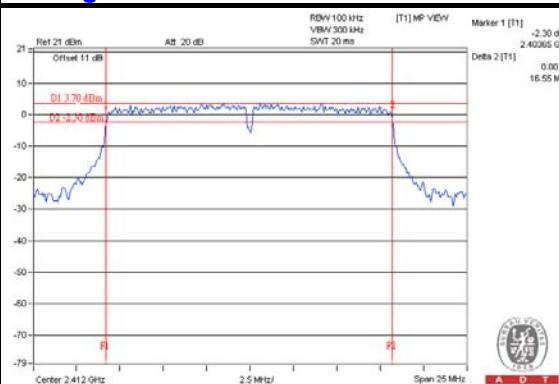

802.11n (HT20)

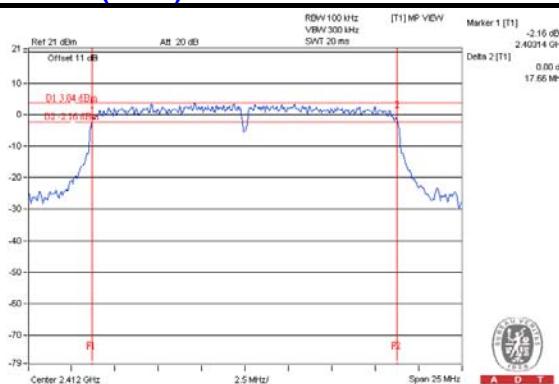

802.11n (HT40)

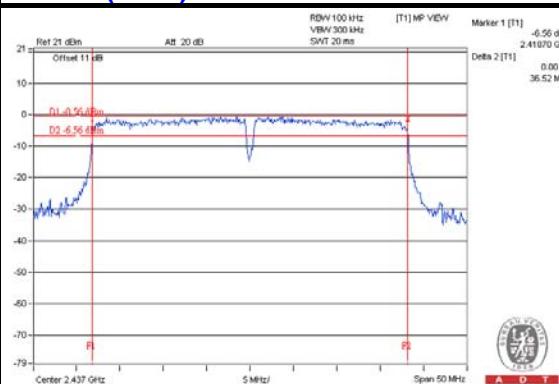


4.4 CONDUCTED OUTPUT POWER

4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

4.4.2 TEST SETUP

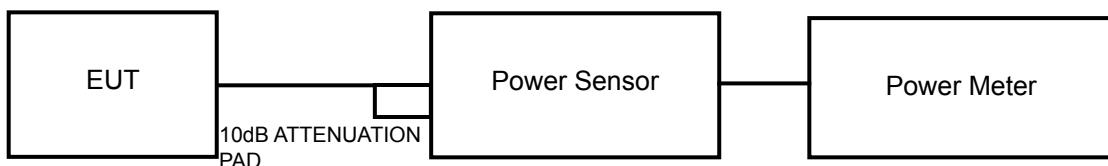

4.4.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.4.4 TEST PROCEDURES

558074 D01 DTS Meas Guidance v03r02 section 9.2.3.2

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.



A D T

4.4.7 TEST RESULTS

FOR PEAK POWER

802.11b

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
1	2412	60.814	17.84	30	PASS
6	2437	58.884	17.70	30	PASS
11	2462	58.210	17.65	30	PASS

802.11g

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
1	2412	111.429	20.47	30	PASS
6	2437	110.662	20.44	30	PASS
11	2462	114.288	20.58	30	PASS

802.11n (HT20)

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
1	2412	88.308	19.46	30	PASS
6	2437	123.027	20.90	30	PASS
11	2462	126.765	21.03	30	PASS

802.11n (HT40)

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
3	2422	128.233	21.08	30	PASS
6	2437	226.464	23.55	30	PASS
9	2452	123.310	20.91	30	PASS



A D T

FOR AVERAGE POWER**802.11b**

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)
1	2412	25.527	14.07
6	2437	25.003	13.98
11	2462	24.434	13.88

802.11g

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)
1	2412	15.959	12.03
6	2437	17.539	12.44
11	2462	17.947	12.54

802.11n (HT20)

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)
1	2412	13.868	11.42
6	2437	13.772	11.39
11	2462	13.996	11.46

802.11n (HT40)

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)
3	2422	19.815	12.97
6	2437	41.783	16.21
9	2452	17.061	12.32




4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST SETUP

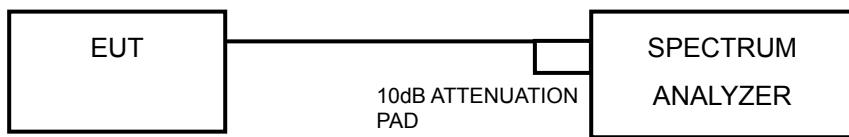

4.5.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.5.4 TEST PROCEDURE

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.



A D T

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6



A D T

4.5.7 TEST RESULTS

802.11b

Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-11.50	8	PASS
6	2437	-11.72	8	PASS
11	2462	-11.31	8	PASS

802.11g

Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-10.42	8	PASS
6	2437	-9.65	8	PASS
11	2462	-10.88	8	PASS

802.11n (HT20)

Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-10.35	8	PASS
6	2437	-7.87	8	PASS
11	2462	-11.20	8	PASS

802.11n (HT40)


Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
3	2422	-16.67	8	PASS
6	2437	-13.50	8	PASS
9	2452	-17.29	8	PASS




A D T

SPECTRUM PLOT OF WORST VALUE


802.11b

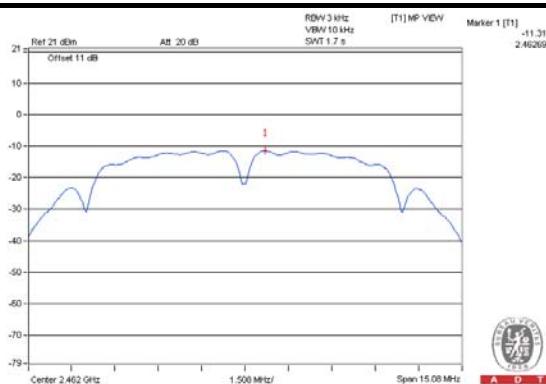


802.11g

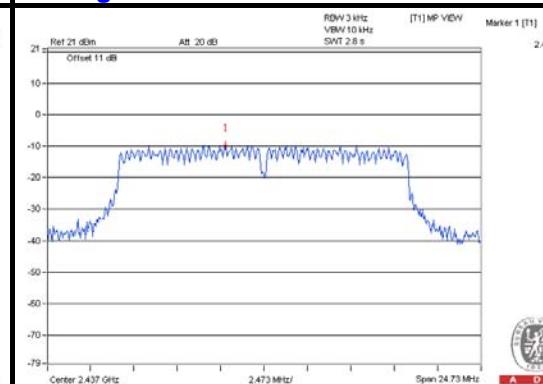

802.11n (HT20)

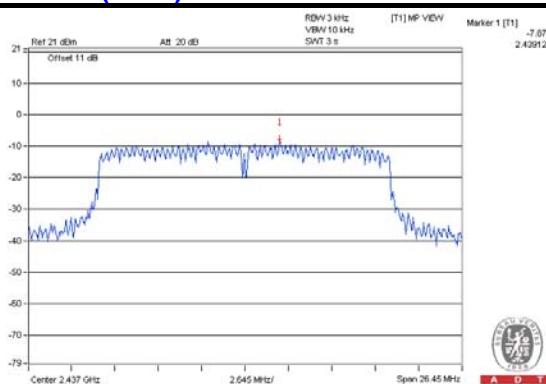

802.11n (HT40)

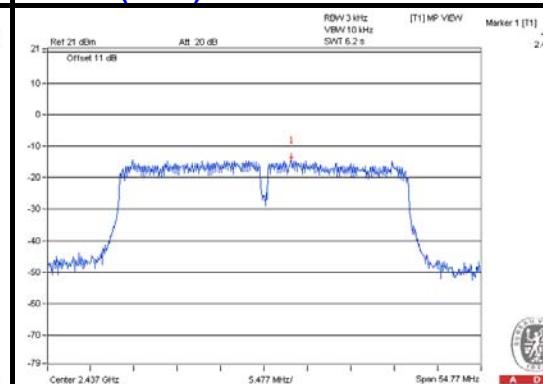



A D T

4.6 CONDUCTED OUT OF BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST SETUP



4.6.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.



A D T

4.6.4 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

558074 D01 DTS Meas Guidance v03r02 section 11.2

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

558074 D01 DTS Meas Guidance v03r02 section 11.3

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.5 DEVIATION FROM TEST STANDARD

No deviation.

4.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.7 TEST RESULTS


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.




A D T

802.11b


CH 1

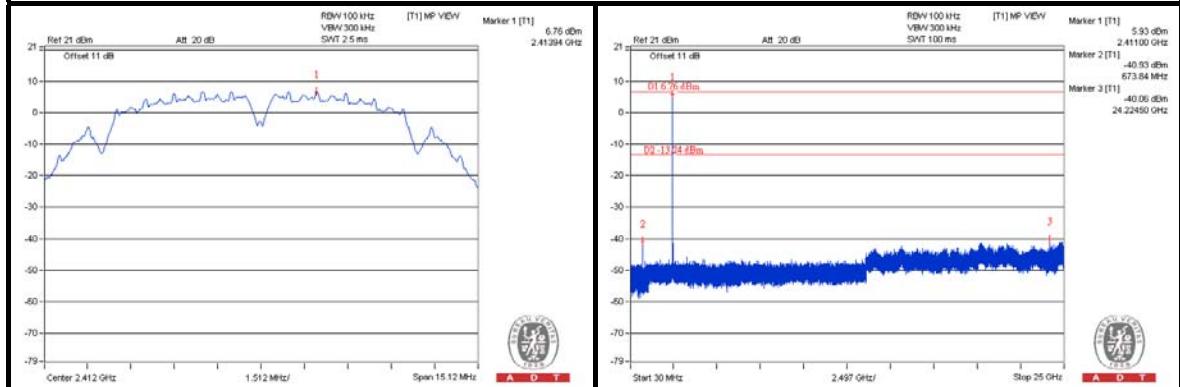


CH 6

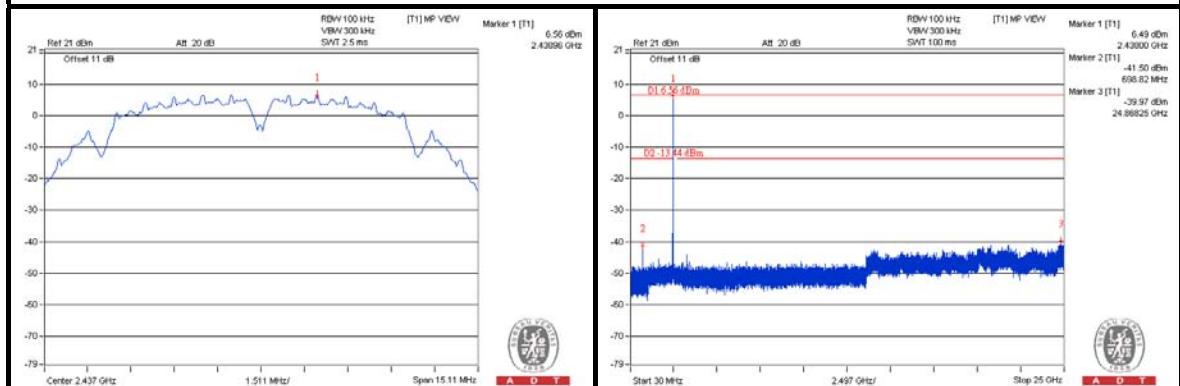

CH 11

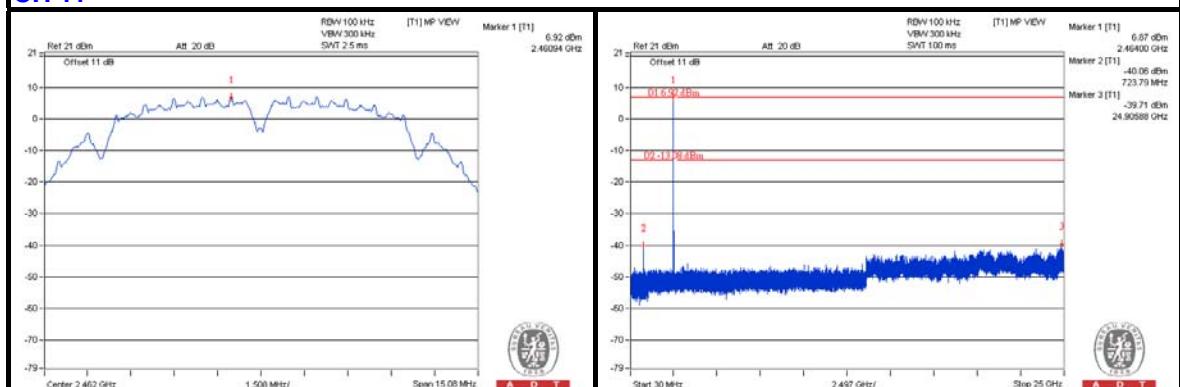

CH 1 Band edge

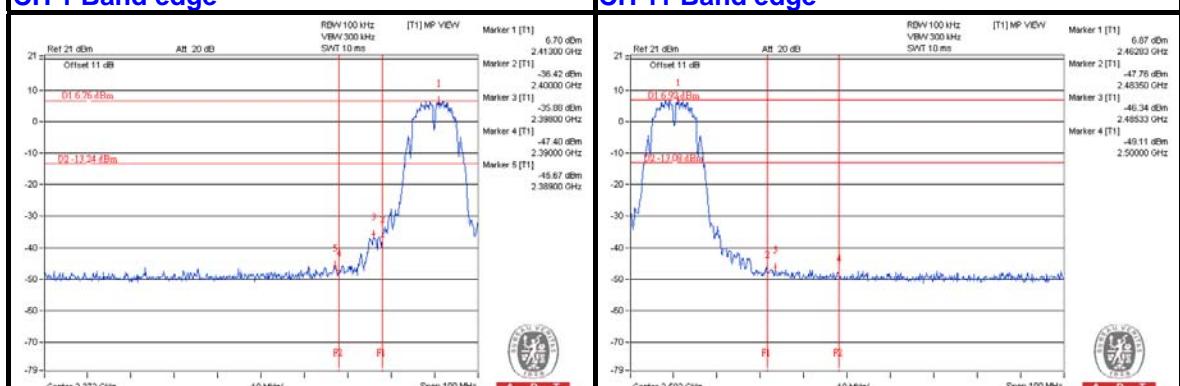





A D T

802.11g


CH 1

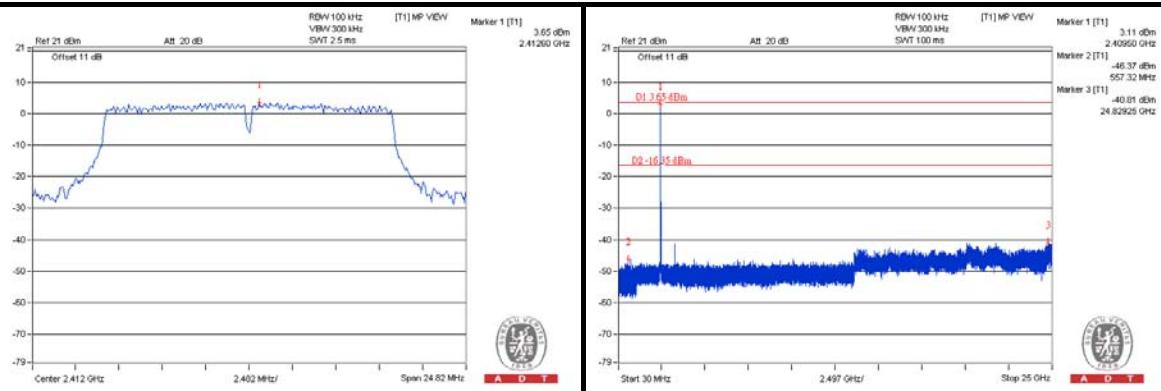


CH 6

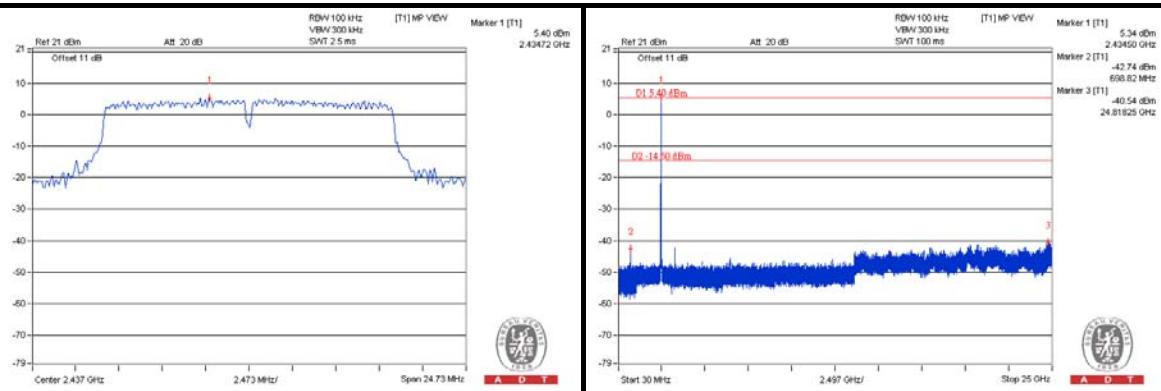

CH 11

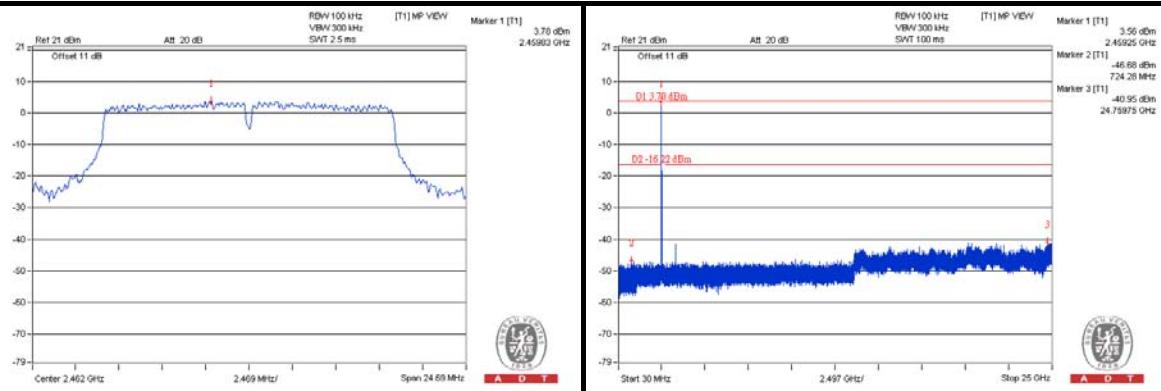

CH 1 Band edge

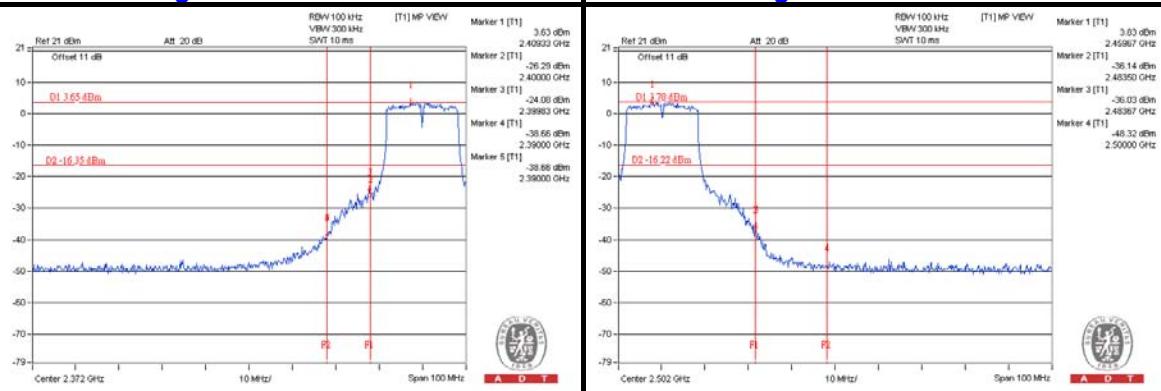





A D T

802.11n (HT20)


CH 1

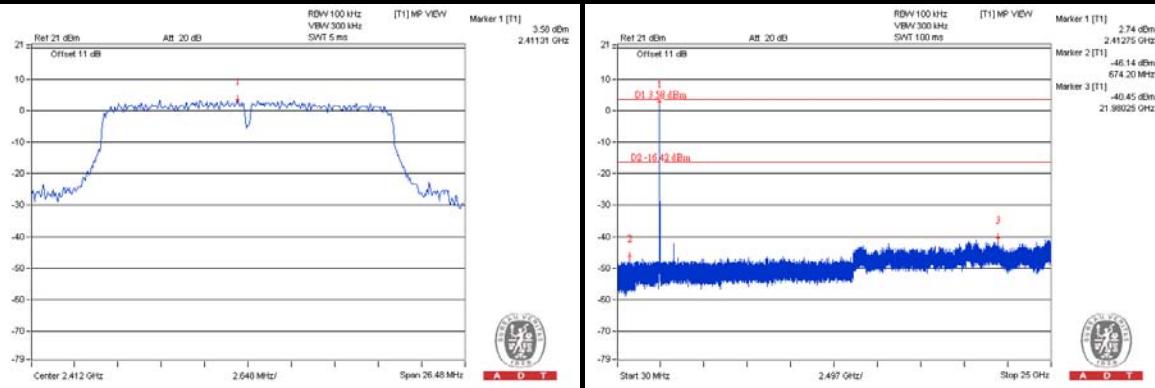


CH 6

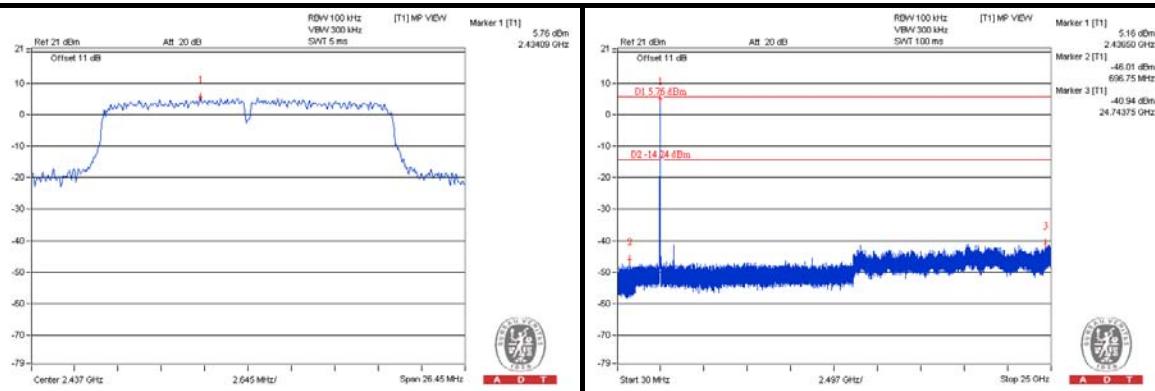

CH 11

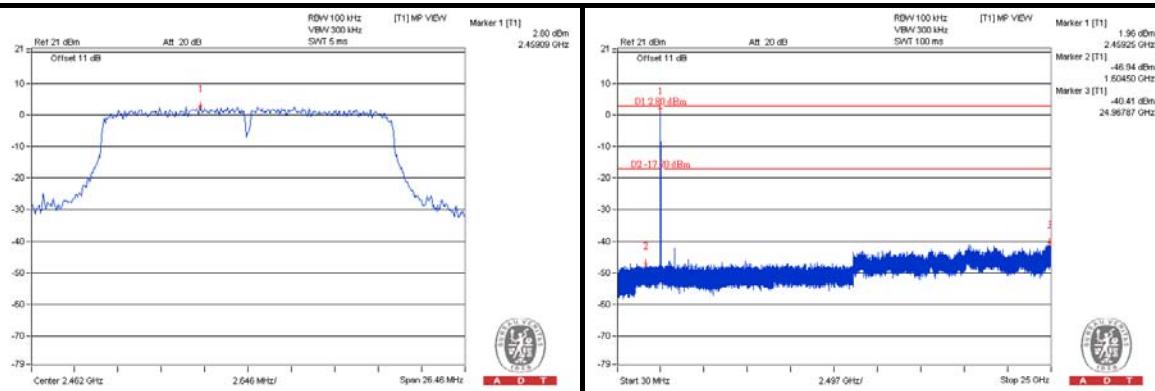

CH 1 Band edge

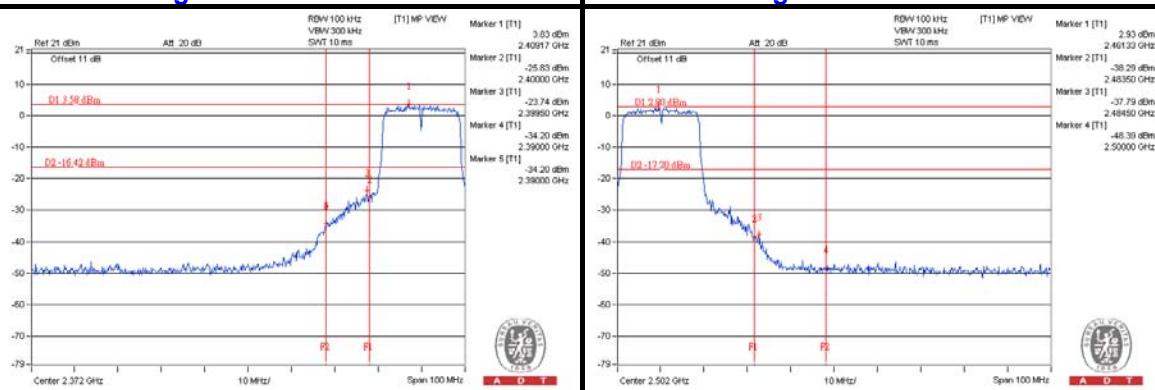





A D T

802.11n (HT40)


CH 3

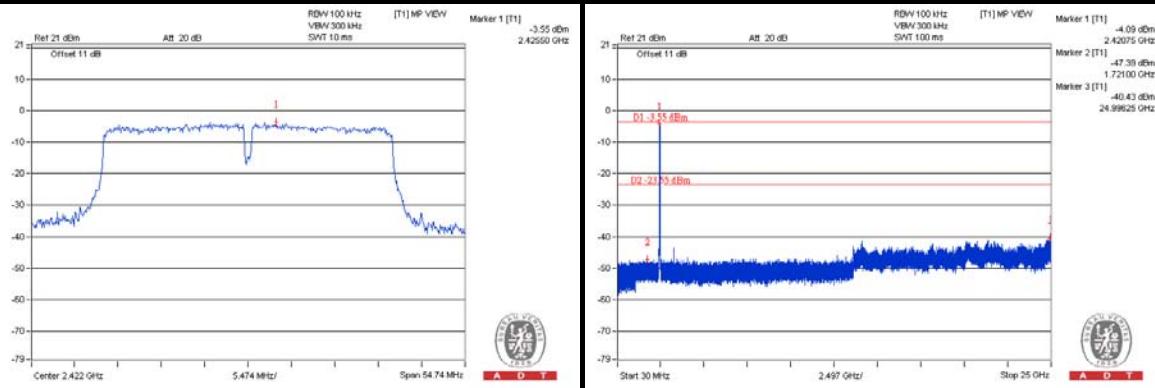


CH 6

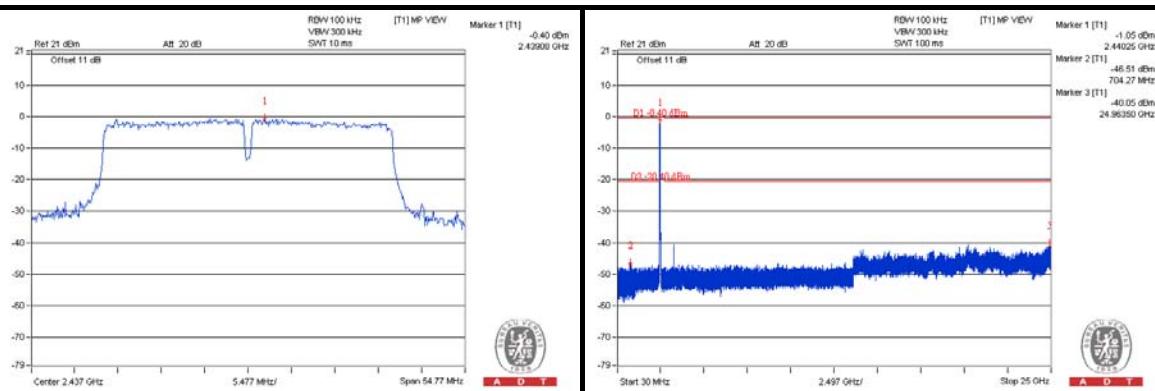

CH 9

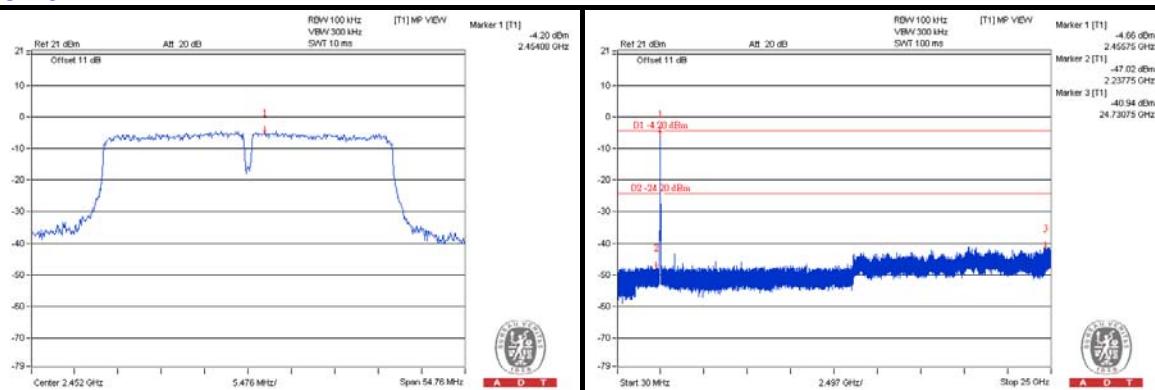

CH 3 Band edge

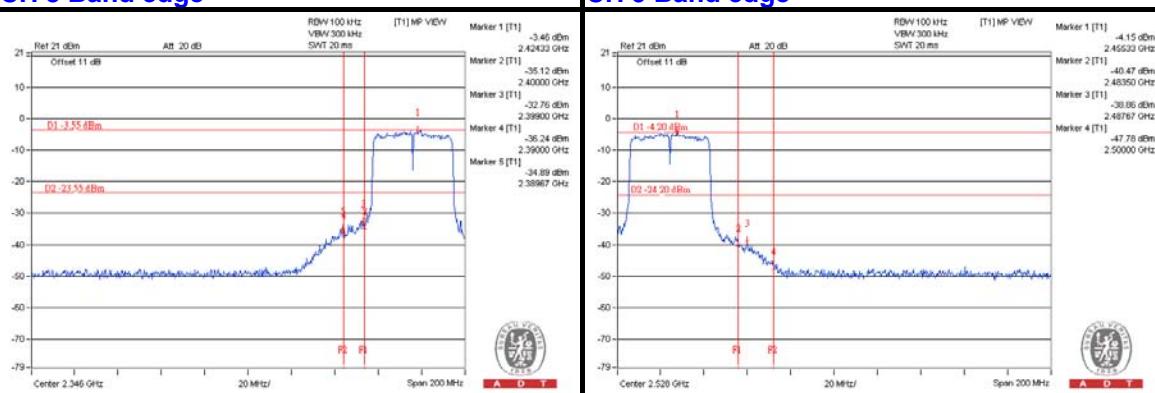



A D T

5. TEST TYPES AND RESULTS (FOR 5.0GHz BAND)

5.1 RADIATED EMISSION MEASUREMENT

5.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

5.1.2 TEST INSTRUMENTS

Same as item 4.1.2.

5.1.3 TEST PROCEDURES

Same as item 4.1.3.

5.1.4 DEVIATION FROM TEST STANDARD

No deviation.

5.1.5 TEST SETUP

Same as item 4.1.5.

5.1.6 EUT OPERATING CONDITIONS

Same as item 4.1.6.



A D T

5.1.7 TEST RESULTS

ABOVE 1GHz DATA :

802.11a

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	66.4 PK	81.5	-15.1	1.00 H	271	60.40	6.00
2	#5725.00	55.8 AV	70.9	-15.1	1.00 H	271	49.80	6.00
3	*5745.00	101.5 PK			1.00 H	342	63.00	38.50
4	*5745.00	90.9 AV			1.00 H	342	52.40	38.50
5	11490.00	62.4 PK	74.0	-11.6	1.14 H	58	42.00	20.40
6	11490.00	49.0 AV	54.0	-5.0	1.14 H	58	28.60	20.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	73.2 PK	88.3	-15.1	1.00 V	271	67.20	6.00
2	#5725.00	63.9 AV	79.0	-15.1	1.00 V	271	57.90	6.00
3	*5745.00	108.3 PK			1.00 V	272	69.80	38.50
4	*5745.00	99.0 AV			1.00 V	272	60.50	38.50
5	11490.00	64.2 PK	74.0	-9.8	1.10 V	239	43.80	20.40
6	11490.00	50.8 AV	54.0	-3.2	1.10 V	239	30.40	20.40

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.
7. The limit value is defined as per 15.247.



A D T

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	99.6 PK			1.30 H	334	61.00	38.60
2	*5785.00	90.1 AV			1.30 H	334	51.50	38.60
3	11570.00	62.0 PK	74.0	-12.0	1.18 H	107	41.60	20.40
4	11570.00	48.5 AV	54.0	-5.5	1.18 H	107	28.10	20.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	108.1 PK			1.12 V	48	69.50	38.60
2	*5785.00	99.1 AV			1.12 V	48	60.50	38.60
3	11570.00	64.0 PK	74.0	-10.0	1.05 V	23	43.60	20.40
4	11570.00	50.4 AV	54.0	-3.6	1.05 V	23	30.00	20.40

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
 - Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. The limit value is defined as per 15.247.



A D T

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	100.4 PK			1.00 H	343	61.70	38.70
2	*5825.00	90.3 AV			1.00 H	343	51.60	38.70
3	#5850.00	55.8 PK	80.4	-24.6	1.01 H	195	49.60	6.20
4	#5850.00	46.1 AV	70.3	-24.2	1.01 H	195	39.90	6.20
5	11650.00	62.2 PK	74.0	-11.8	1.12 H	36	41.90	20.30
6	11650.00	48.7 AV	54.0	-5.3	1.12 H	36	28.40	20.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	108.5 PK			1.01 V	45	69.80	38.70
2	*5825.00	99.0 AV			1.01 V	45	60.30	38.70
3	#5850.00	64.3 PK	88.5	-24.2	1.01 V	195	58.10	6.20
4	#5850.00	54.8 AV	79.0	-24.2	1.01 V	195	48.60	6.20
5	11650.00	63.9 PK	74.0	-10.1	1.03 V	66	43.60	20.30
6	11650.00	50.3 AV	54.0	-3.7	1.03 V	66	30.00	20.30

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.
7. The limit value is defined as per 15.247.



A D T

802.11n (HT20)

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	64.7 PK	79.7	-15.0	1.05 H	279	58.70	6.00
2	#5725.00	56.0 AV	71.0	-15.0	1.05 H	279	50.00	6.00
3	*5745.00	99.7 PK			1.00 H	339	61.20	38.50
4	*5745.00	91.0 AV			1.00 H	339	52.50	38.50
5	11490.00	61.6 PK	74.0	-12.4	1.33 H	205	41.20	20.40
6	11490.00	48.5 AV	54.0	-5.5	1.33 H	205	28.10	20.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	73.2 PK	88.2	-15.0	1.05 V	279	67.20	6.00
2	#5725.00	63.6 AV	78.6	-15.0	1.05 V	279	57.60	6.00
3	*5745.00	108.2 PK			1.10 V	270	69.70	38.50
4	*5745.00	98.6 AV			1.10 V	270	60.10	38.50
5	11490.00	63.9 PK	74.0	-10.1	1.03 V	22	43.50	20.40
6	11490.00	50.8 AV	54.0	-3.2	1.03 V	22	30.40	20.40

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
 - Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.
7. The limit value is defined as per 15.247.



A D T

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	99.7 PK			1.09 H	334	61.10	38.60
2	*5785.00	90.4 AV			1.09 H	334	51.80	38.60
3	11570.00	61.7 PK	74.0	-12.3	1.07 H	44	41.30	20.40
4	11570.00	48.4 AV	54.0	-5.6	1.07 H	44	28.00	20.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	109.3 PK			1.12 V	46	70.70	38.60
2	*5785.00	99.6 AV			1.12 V	46	61.00	38.60
3	11570.00	63.9 PK	74.0	-10.1	1.30 V	21	43.50	20.40
4	11570.00	50.4 AV	54.0	-3.6	1.30 V	21	30.00	20.40

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
 - Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. The limit value is defined as per 15.247.



A D T

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	100.1 PK			1.00 H	344	61.40	38.70
2	*5825.00	90.8 AV			1.00 H	344	52.10	38.70
3	#5850.00	56.0 PK	80.1	-24.1	1.05 H	201	49.80	6.20
4	#5850.00	46.7 AV	70.8	-24.1	1.05 H	201	40.50	6.20
5	11650.00	61.5 PK	74.0	-12.5	1.06 H	123	41.20	20.30
6	11650.00	48.6 AV	54.0	-5.4	1.06 H	123	28.30	20.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	108.8 PK			1.02 V	37	70.10	38.70
2	*5825.00	99.6 AV			1.02 V	37	60.90	38.70
3	#5850.00	64.7 PK	88.8	-24.1	1.05 V	201	58.50	6.20
4	#5850.00	55.5 AV	79.6	-24.1	1.05 V	201	49.30	6.20
5	11650.00	63.8 PK	74.0	-10.2	1.33 V	205	43.50	20.30
6	11650.00	50.4 AV	54.0	-3.6	1.33 V	205	30.10	20.30

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.
7. The limit value is defined as per 15.247.



A D T

802.11n (HT40)

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	65.6 PK	77.1	-11.5	1.00 H	252	59.60	6.00
2	#5725.00	56.0 AV	67.5	-11.5	1.00 H	252	50.00	6.00
3	*5755.00	97.1 PK			1.00 H	334	58.50	38.60
4	*5755.00	87.5 AV			1.00 H	334	48.90	38.60
5	11510.00	62.1 PK	74.0	-11.9	1.15 H	74	41.70	20.40
6	11510.00	49.1 AV	54.0	-4.9	1.15 H	74	28.70	20.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	74.6 PK	86.1	-11.5	1.00 V	252	68.60	6.00
2	#5725.00	64.5 AV	76.0	-11.5	1.00 V	252	58.50	6.00
3	*5755.00	106.1 PK			1.00 V	272	67.50	38.60
4	*5755.00	96.0 AV			1.00 V	272	57.40	38.60
5	11510.00	63.9 PK	74.0	-10.1	1.33 V	2	43.50	20.40
6	11510.00	50.4 AV	54.0	-3.6	1.33 V	2	30.00	20.40

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
 - Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.
7. The limit value is defined as per 15.247.



A D T

CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	98.2 PK			1.00 H	335	59.60	38.60
2	*5795.00	88.3 AV			1.00 H	335	49.70	38.60
3	#5850.00	55.3 PK	78.2	-22.9	1.18 H	274	49.10	6.20
4	#5850.00	45.4 AV	68.3	-22.9	1.18 H	274	39.20	6.20
5	11590.00	61.6 PK	74.0	-12.4	1.06 H	32	41.20	20.40
6	11590.00	48.9 AV	54.0	-5.1	1.06 H	32	28.50	20.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	106.1 PK			1.33 V	48	67.50	38.60
2	*5795.00	95.9 AV			1.33 V	48	57.30	38.60
3	#5850.00	63.2 PK	86.1	-22.9	1.18 V	274	57.00	6.20
4	#5850.00	53.0 AV	75.9	-22.9	1.18 V	274	46.80	6.20
5	11590.00	64.0 PK	74.0	-10.0	1.20 V	305	43.60	20.40
6	11590.00	50.4 AV	54.0	-3.6	1.20 V	305	30.00	20.40

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.
7. The limit value is defined as per 15.247.



A D T

802.11ac (VHT80)

CHANNEL	TX Channel 155	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	64.1 PK	75.1	-11.0	1.00 H	252	58.10	6.00
2	#5725.00	54.8 AV	66.3	-11.5	1.00 H	252	48.80	6.00
3	*5775.00	95.1 PK			1.00 H	336	56.50	38.60
4	*5775.00	86.3 AV			1.00 H	336	47.70	38.60
5	#5850.00	63.7 PK	75.1	-11.4	1.38 H	19	57.50	6.20
6	#5850.00	55.1 AV	66.3	-11.2	1.38 H	19	48.90	6.20
7	11550.00	63.3 PK	74.0	-10.7	1.06 H	32	42.90	20.40
8	11550.00	50.0 AV	54.0	-4.0	1.06 H	32	29.60	20.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	76.4 PK	81.9	-5.5	1.00 V	252	70.40	6.00
2	#5725.00	67.9 AV	73.5	-5.6	1.00 V	252	61.90	6.00
3	*5775.00	101.9 PK			1.00 V	230	63.30	38.60
4	*5775.00	93.5 AV			1.00 V	230	54.90	38.60
5	#5850.00	75.1 PK	81.9	-6.8	1.38 V	19	68.90	6.20
6	#5850.00	66.8 AV	73.5	-6.7	1.38 V	19	60.60	6.20
7	11550.00	63.6 PK	74.0	-10.4	1.17 V	123	43.20	20.40
8	11550.00	50.7 AV	54.0	-3.3	1.17 V	123	30.30	20.40

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.
7. The limit value is defined as per 15.247.



A D T

BELOW 1GHz WORST-CASE DATA:**802.11a**

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	99.89	34.0 QP	43.5	-9.5	2.00 H	57	52.80	-18.80
2	166.00	42.3 QP	43.5	-1.2	1.50 H	125	56.30	-14.00
3	232.11	37.3 QP	46.0	-8.7	1.26 H	93	53.00	-15.70
4	265.16	37.3 QP	46.0	-8.7	1.00 H	261	50.80	-13.50
5	292.38	34.5 QP	46.0	-11.5	1.26 H	151	47.00	-12.50
6	527.64	32.5 QP	46.0	-13.5	1.50 H	98	40.30	-7.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	45.45	33.6 QP	40.0	-6.4	1.50 V	342	48.30	-14.70
2	97.95	29.6 QP	43.5	-13.9	1.24 V	24	48.60	-19.00
3	166.00	31.6 QP	43.5	-11.9	1.99 V	309	45.60	-14.00
4	265.16	31.4 QP	46.0	-14.6	1.50 V	346	44.90	-13.50
5	374.04	28.2 QP	46.0	-17.8	1.24 V	219	38.90	-10.70
6	527.64	31.4 QP	46.0	-14.6	1.24 V	16	39.20	-7.80

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

5.2 CONDUCTED EMISSION MEASUREMENT

5.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

NOTE: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

5.2.2 TEST INSTRUMENTS

Same as item 4.2.2.

5.2.3 TEST PROCEDURES

Same as item 4.2.3.

5.2.4 DEVIATION FROM TEST STANDARD

No deviation.

5.2.5 TEST SETUP

Same as item 4.2.5.

5.2.6 EUT OPERATING CONDITIONS

Same as item 4.1.6.

5.2.7 TEST RESULTS


CONDUCTED WORST-CASE DATA : 802.11a

PHASE	Line 1		6dB BANDWIDTH		9kHz	
-------	--------	--	---------------	--	------	--

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16535	0.08	44.14	36.20	44.22	36.28	65.19	55.19	-20.97	-18.91
2	0.23000	0.07	47.76	37.83	47.83	37.90	62.45	52.45	-14.62	-14.55
3	1.88200	0.15	42.02	38.08	42.17	38.23	56.00	46.00	-13.83	-7.77
4	2.28200	0.16	41.79	37.48	41.95	37.64	56.00	46.00	-14.05	-8.36
5	3.82200	0.22	42.36	28.48	42.58	28.70	56.00	46.00	-13.42	-17.30
6	14.02600	0.72	34.62	28.77	35.34	29.49	60.00	50.00	-24.66	-20.51

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

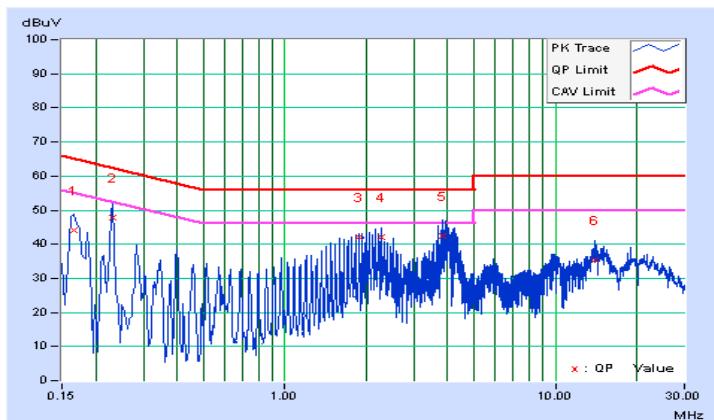




A D T

PHASE	Line 2	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.17400	0.05	53.00	45.25	53.05	45.30	64.77	54.77	-11.72
2	0.22600	0.05	44.38	35.05	44.43	35.10	62.60	52.60	-18.16	-17.49
3	0.34200	0.06	40.92	31.47	40.98	31.53	59.15	49.15	-18.17	-17.62
4	2.22600	0.15	41.56	38.00	41.71	38.15	56.00	46.00	-14.29	-7.85
5	4.11000	0.21	44.52	33.14	44.73	33.35	56.00	46.00	-11.27	-12.65
6	14.95000	0.67	35.36	29.88	36.03	30.55	60.00	50.00	-23.97	-19.45

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

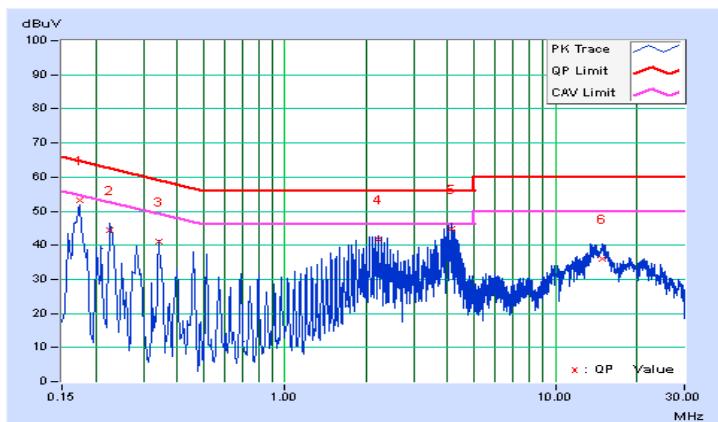



A D T

5.3 6dB BANDWIDTH MEASUREMENT

5.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

5.3.2 TEST SETUP

Same as item 4.3.2.

5.3.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

5.3.4 TEST PROCEDURE

Same as item 4.3.4.

5.3.5 DEVIATION FROM TEST STANDARD

No deviation.

5.3.6 EUT OPERATING CONDITIONS

Same as item 4.3.6.



A D T

5.3.7 TEST RESULTS

802.11a

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
149	5745	16.62	0.5	PASS
157	5785	16.55	0.5	PASS
165	5825	16.49	0.5	PASS

802.11n (HT20)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
149	5745	17.69	0.5	PASS
157	5785	17.66	0.5	PASS
165	5825	17.68	0.5	PASS

802.11n (HT40)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
151	5755	36.58	0.5	PASS
159	5795	36.54	0.5	PASS

802.11ac (VHT80)


CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
155	5775	76.63	0.5	PASS




A D T

SPECTRUM PLOT OF WORST VALUE


802.11a

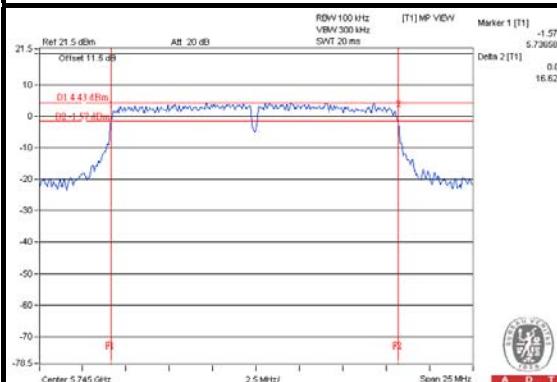


802.11n (HT20)

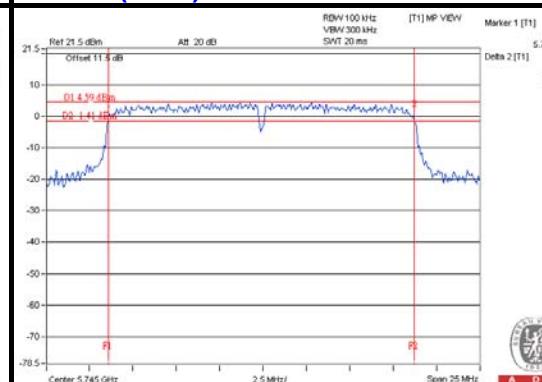

802.11n (HT40)

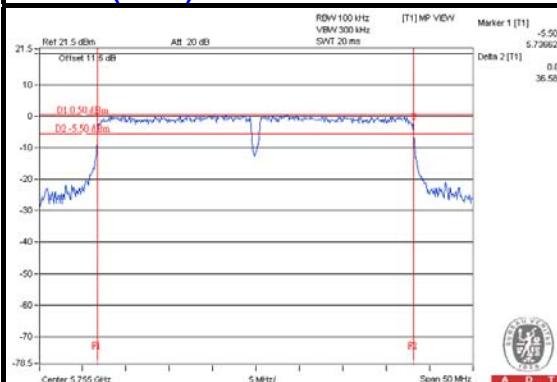

802.11ac (VHT80)

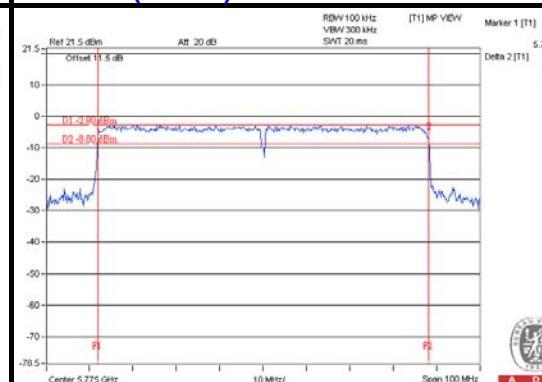


5.4 CONDUCTED OUTPUT POWER

5.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT


For systems using digital modulation in the 5725 –5850 MHz bands: 1 Watt (30dBm)

5.4.2 TEST SETUP

For 802.11a, 802.11n (HT20), 802.11n (HT40)

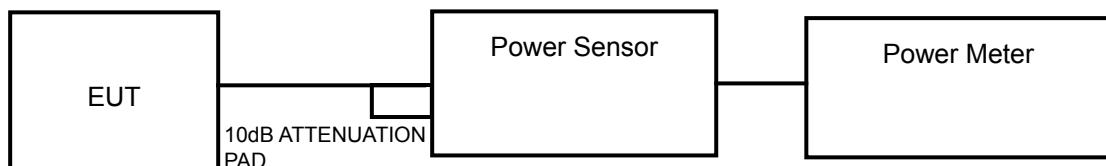

For 802.11ac (VHT80)

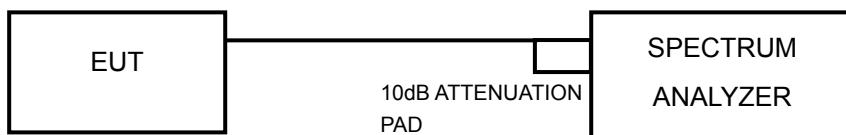

5.4.3 INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.



A D T

5.4.4 TEST PROCEDURES

For 802.11a, 802.11n (HT20), 802.11n (HT40)

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

For 802.11ac (VHT80)

This procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.

- 1) Set the RBW = 1 MHz.
- 2) Set the VBW \geq 3 RBW.
- 3) Set the span \geq 1.5 x DTS bandwidth.
- 4) Detector = peak.
- 5) Sweep time = auto couple.
- 6) Trace mode = max hold.
- 7) Allow trace to fully stabilize.
- 8) Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select peak detector). If the instrument does not have a band power function, sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS bandwidth.

5.4.5 DEVIATION FROM TEST STANDARD

No deviation.

5.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.



A D T

5.4.7 TEST RESULTS

802.11a

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
149	5745	207.014	23.16	30	PASS
157	5785	209.411	23.21	30	PASS
165	5825	204.174	23.10	30	PASS

802.11n (HT20)

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
149	5745	202.768	23.07	30	PASS
157	5785	207.970	23.18	30	PASS
165	5825	208.449	23.19	30	PASS

802.11n (HT40)

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
151	5755	203.704	23.09	30	PASS
159	5795	207.014	23.16	30	PASS

802.11ac (VHT80)

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
155	5775	204.174	23.10	30	PASS



A D T

802.11a

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)
149	5745	59.156	17.72
157	5785	58.749	17.69
165	5825	58.479	17.67

802.11n (HT20)

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)
149	5745	59.293	17.73
157	5785	59.020	17.71
165	5825	57.943	17.63

802.11n (HT40)

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)
151	5755	59.841	17.77
159	5795	58.614	17.68

802.11ac (VHT80)

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)
155	5775	56.364	17.51



5.5 POWER SPECTRAL DENSITY MEASUREMENT

5.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

5.5.2 TEST SETUP

Same as item 4.5.2.

5.5.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

5.5.4 TEST PROCEDURE.

Same as item 4.5.4.

5.5.5 DEVIATION FROM TEST STANDARD

No deviation.

5.5.6 EUT OPERATING CONDITION

Same as item 4.3.6.



A D T

5.5.7 TEST RESULTS

802.11a

Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
149	5745	-10.44	8	PASS
157	5785	-10.05	8	PASS
165	5825	-10.06	8	PASS

802.11n (HT20)

Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
149	5745	-9.75	8	PASS
157	5785	-9.79	8	PASS
165	5825	-9.68	8	PASS

802.11n (HT40)

Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
151	5755	-12.31	8	PASS
159	5795	-11.79	8	PASS

802.11ac (VHT80)


Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
155	5775	-15.30	8	PASS




A D T

SPECTRUM PLOT OF WORST VALUE


802.11a

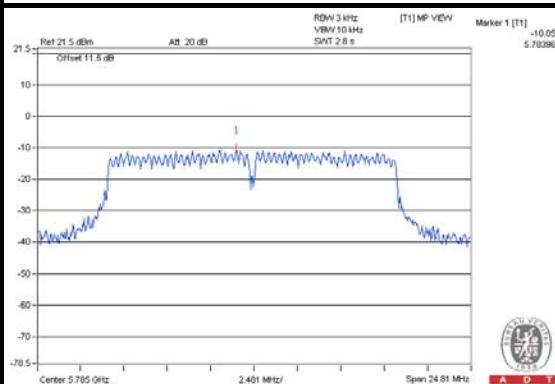


802.11n (HT20)

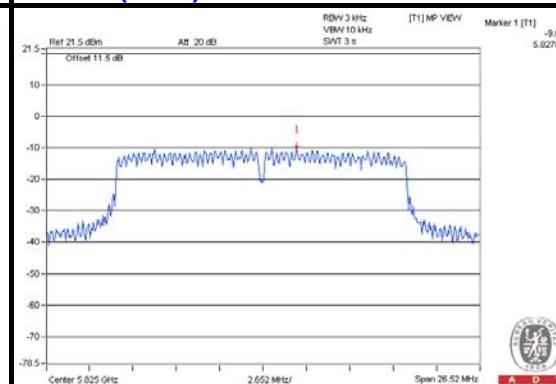

802.11n (HT40)

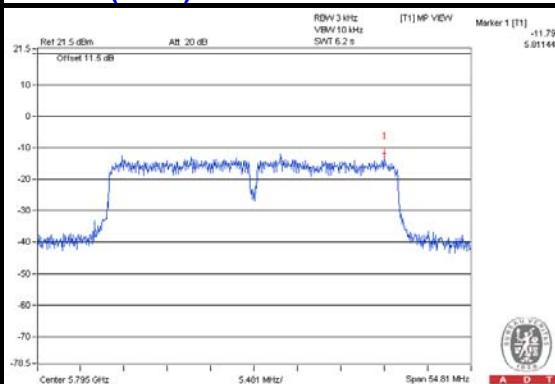

802.11ac (VHT80)

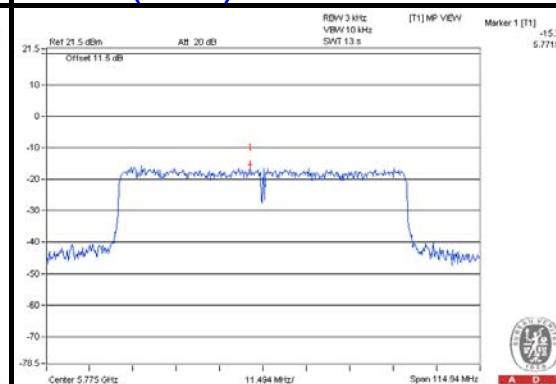



A D T

5.6 CONDUCTED OUT OF BAND EMISSION MEASUREMENT

5.6.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

5.6.2 TEST SETUP

Same as Item 4.6.2

5.6.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

5.6.4 TEST PROCEDURE

Same as Item 4.6.4

5.6.5 DEVIATION FROM TEST STANDARD

No deviation.

5.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6

5.6.7 TEST RESULTS


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.




A D T

802.11a


CH 149

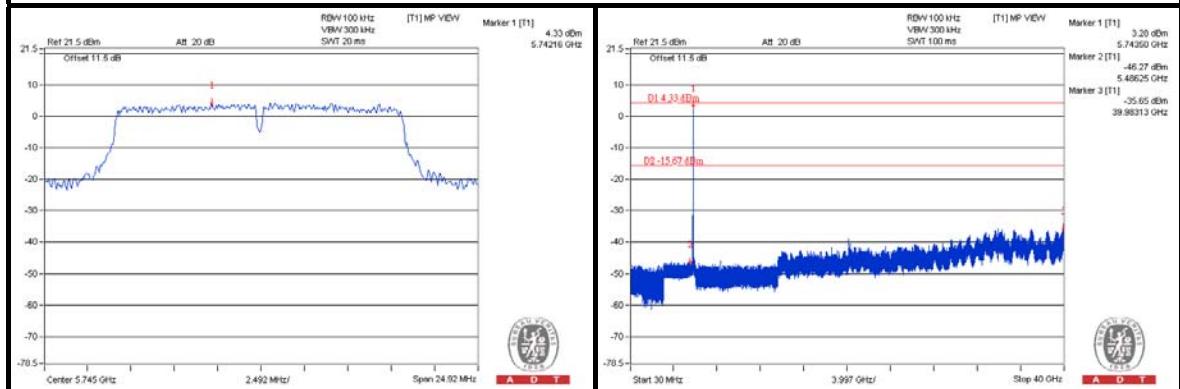


CH 157

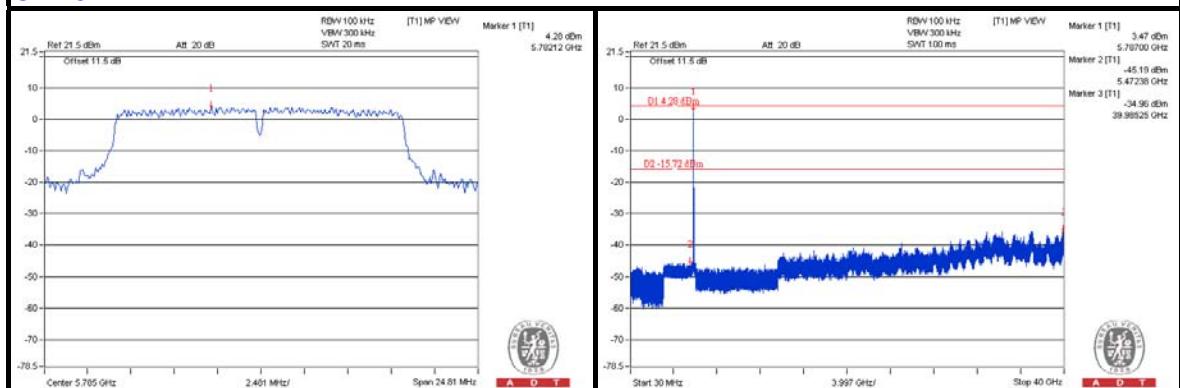

CH 165

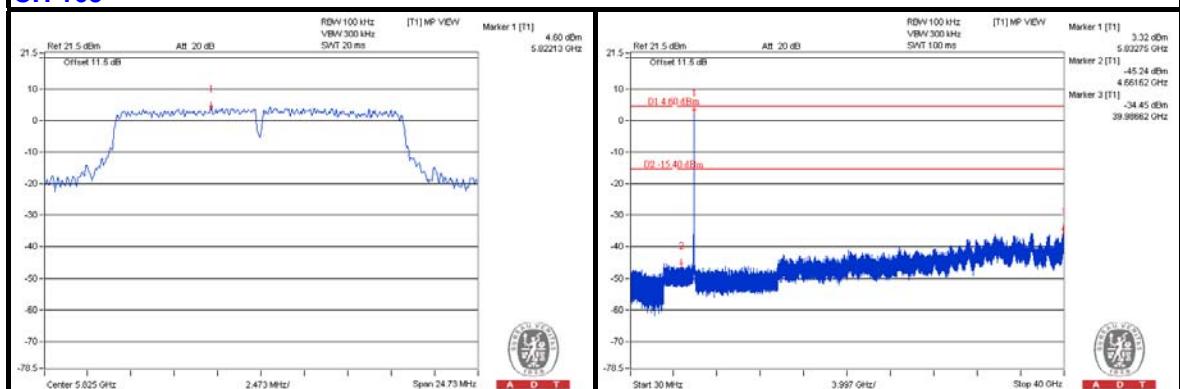

CH 149 Band edge

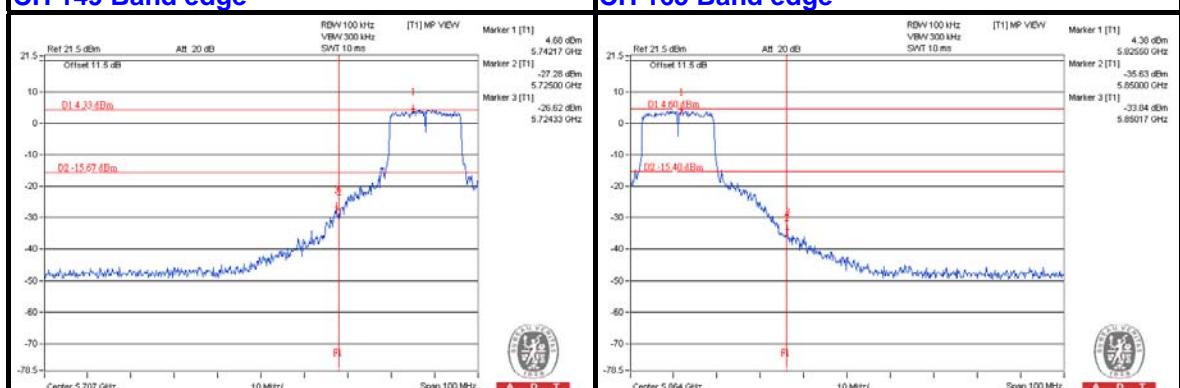





A D T

802.11n (HT20)


CH 149

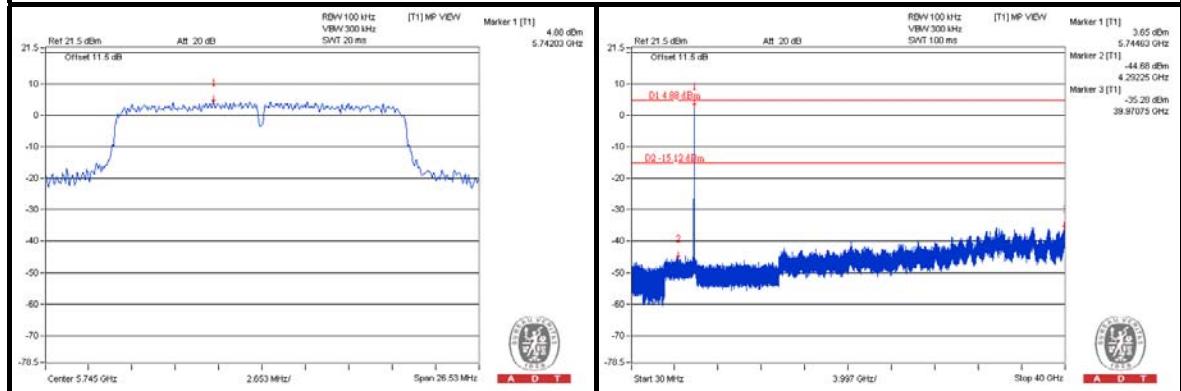


CH 157

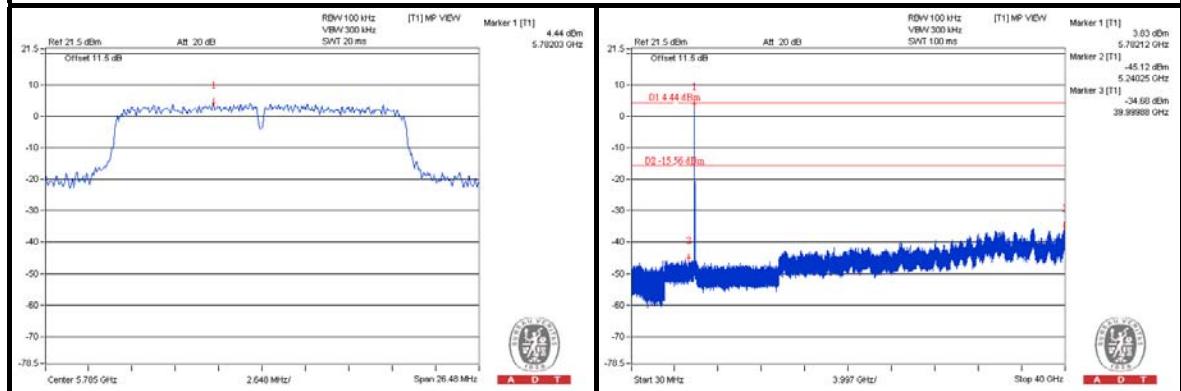

CH 165

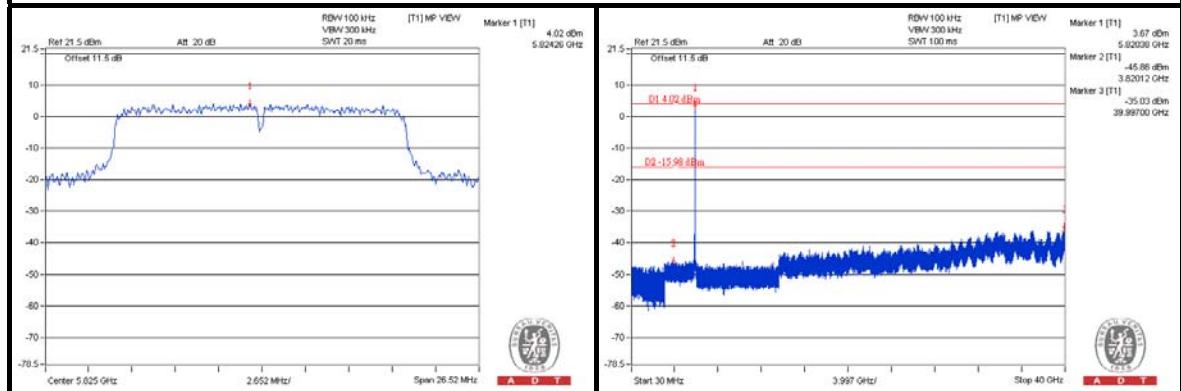

CH 149 Band edge

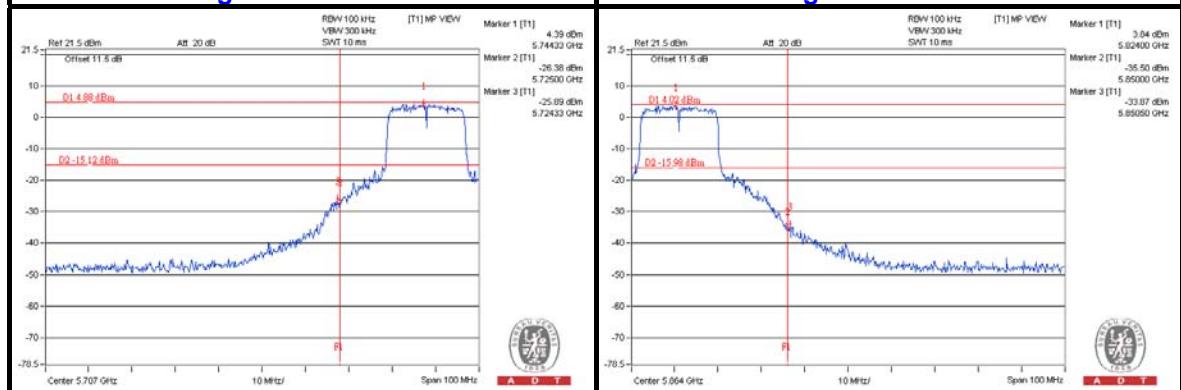





A D T

802.11n (HT40)


CH 151

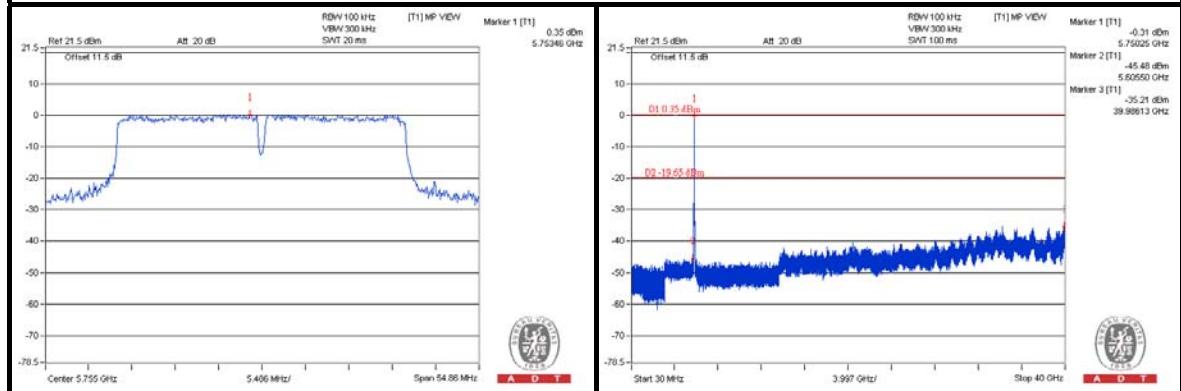

CH 159

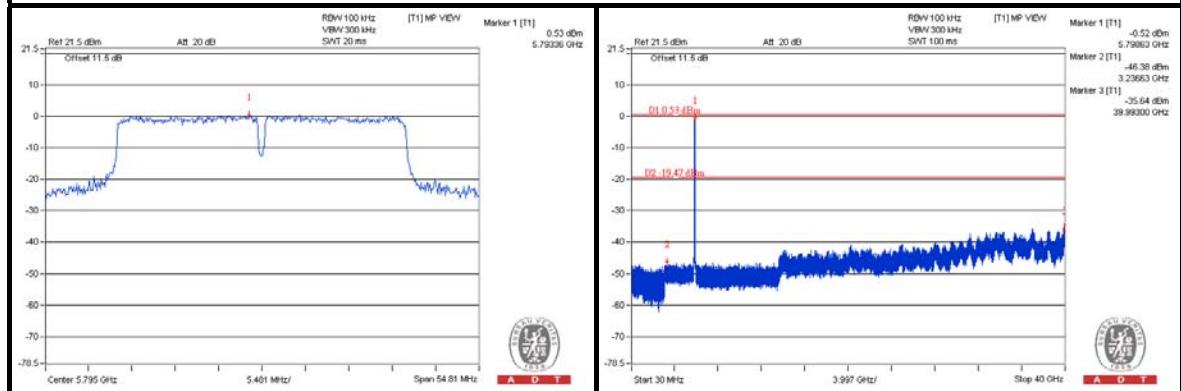

CH 151 Band edge

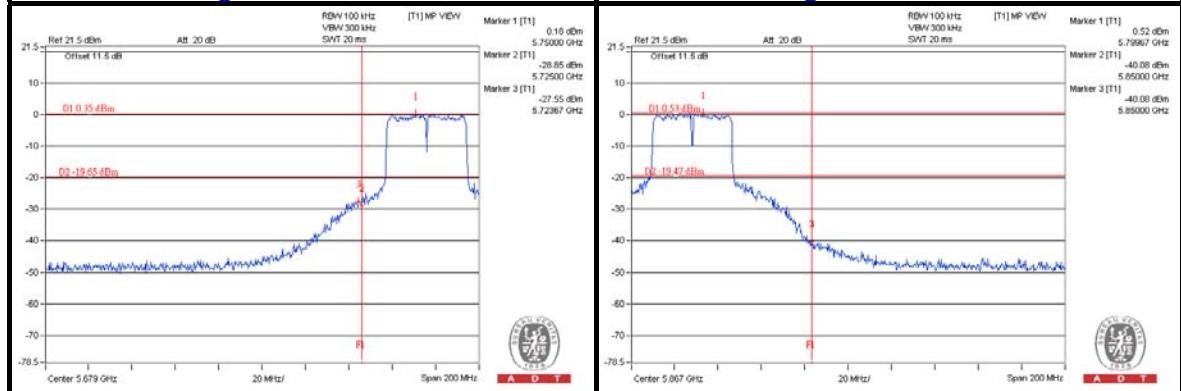





A D T

802.11ac (VHT80)

CH 155

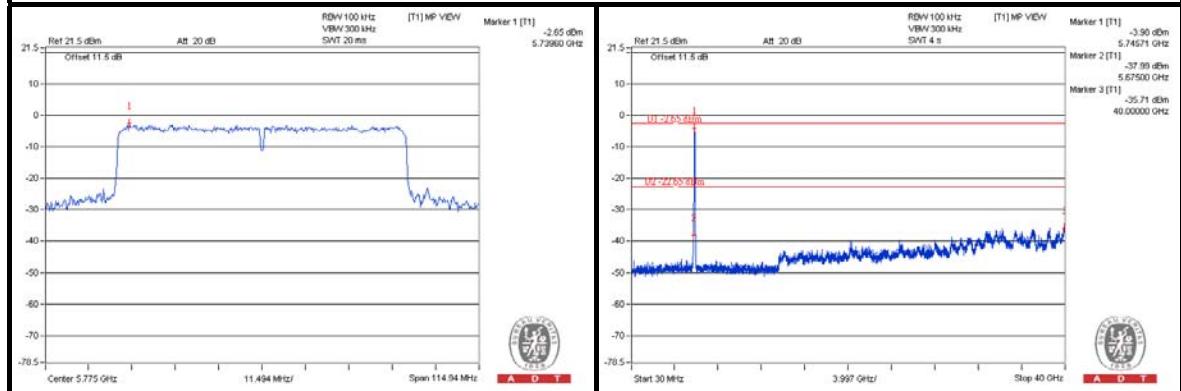

CH 155 Band edge

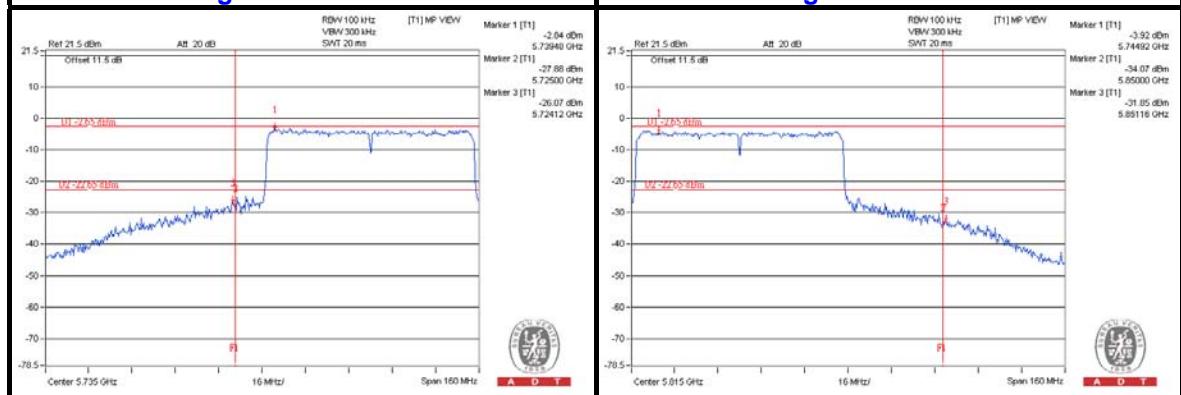



A D T

6. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



7. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232
Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.



A D T

8. APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

---END---