



A Test Lab Techno Corp.

Changan Lab : No. 140-1, Changan Street, Bade District, Taoyuan City 33465, Taiwan (R.O.C).

Tel : 886-3-271-0188 / Fax : 886-3-271-0190

SAR EVALUATION REPORT




Test Report No.	: 1611FS16-01
Applicant	: TP-Link Technologies Co., Ltd.
Applicant Address	: Building 24 (floors 1,3,4,5) and 28 (floors 1-4), Central Science and Technology Park, Nanshan, Shenzhen, China 518057
Product Type	: AC1300 High Power Wireless Dual Band USB Adapter
Trade Name	: TP-LINK
Model Number	: Archer T4UHP
Date of Received	: Aug. 23, 2016
Test Period	: Nov. 02 ~ Nov. 23, 2016
Date of Issued	: Dec. 15, 2016
Test Environment	: Ambient Temperature : 22 ± 2 °C Relative Humidity : 40 - 70 %
Standard	: ANSI/IEEE C95.1-1992 / IEEE Std. 1528-2013 KDB 865664 D01 v01r04 / KDB 865664 D02 v01r02 KDB 447498 D01 v06 / KDB 447498 D02 v02r01 KDB 248227 D01 v02r02
Test Lab Location	: Chang-an Lab




1. The test operations have to be performed with cautious behavior, the test results are as attached.
2. The test results are under chamber environment of A Test Lab Techno Corp. A Test Lab Techno Corp. does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples.
3. The measurement report has to be written approval of A Test Lab Techno Corp. It may only be reproduced or published in full. This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. The test results in the report only apply to the tested sample.

Approved By

: 
(Bill Hu)

Tested By

: 
(Mark Duan)



Contents

1. Summary of Maximum Reported SAR Value	4
2. Description of Equipment under Test (EUT)	5
3. Introduction.....	6
3.1 SAR Definition	6
4. SAR Measurement Setup	7
4.1 DASY E-Field Probe System.....	8
4.2 Data Acquisition Electronic (DAE) System.....	10
4.3 Robot	10
4.4 Measurement Server.....	10
4.5 Device Holder	11
4.6 Oval Flat Phantom - ELI 5.0.....	11
4.7 Data Storage and Evaluation.....	12
5. Tissue Simulating Liquids.....	15
5.1 Ingredients.....	16
5.2 Recipes.....	16
5.3 Liquid Depth	17
6. SAR Testing with RF Transmitters	18
6.1 SAR Testing with 802.11 Transmitters.....	18
6.2 Conducted Power.....	19
6.3 Antenna location.....	23
6.4 Stand-alone SAR Evaluate.....	23
6.5 Simultaneous Transmitting Evaluate	26
6.6 SAR test reduction according to KDB	27
7. System Verification and Validation	28
7.1 Symmetric Dipoles for System Verification	28
7.2 Liquid Parameters	29
7.3 Verification Summary	33
7.4 Validation Summary	35
8. Test Equipment List.....	36
9. Measurement Uncertainty	37
10. Measurement Procedure.....	40
10.1 Spatial Peak SAR Evaluation	40
10.2 Area & Zoom Scan Procedures	41
10.3 Volume Scan Procedures.....	41
10.4 SAR Averaged Methods	41
10.5 Power Drift Monitoring.....	41



11. SAR Test Results Summary	42
11.1 Head Measurement SAR	43
11.2 Body Measurement SAR.....	43
11.3 Hot-spot mode Measurement SAR	46
11.4 Extremity Measurement SAR.....	46
11.5 SAR Measurement Variability.....	47
11.6 Std. C95.1-1992 RF Exposure Limit.....	48
12. References	49
Appendix A - System Performance Check.....	50
Appendix B - SAR Measurement Data	69
Appendix C - Calibration.....	127



1. Summary of Maximum Reported SAR Value

Equipment Class	Mode	Highest Reported		
		Head SAR _{1g} (W/kg)	Body-Worn stand alone SAR _{1g} (W/kg)	Hotspot SAR _{1g} (W/kg)
DTS	WLAN 2.4GHz	N/A	0.77	N/A
NII	WLAN 5GHz U-NII-1	N/A	0.73	N/A
	WLAN 5GHz U-NII-2A	N/A	1.08	N/A
	WLAN 5GHz U-NII-2C	N/A	1.13	N/A
	WLAN 5GHz U-NII-3	N/A	1.11	N/A
Highest Simultaneous Transmission SAR		Head SAR _{1g} (W/kg)	Body-Worn stand alone SAR _{1g} (W/kg)	Hotspot SAR _{1g} (W/kg)
DTS (ANT-0+ANT-1)		N/A	0.89	N/A

NOTE: 1. The N/A is EUT not apply to the assessment of the exposure conditions.

2. The test procedures, as described in American National Standards, Institute ANSI/IEEE C95.1 were employed and they specify the maximum exposure limit of Body is SAR_{1g} 1.6 W/kg of tissue for portable devices being used within 20cm between user and EUT in the uncontrolled environment. A description of the product and operating configuration, detailed summary of the test results, methodology and procedures used in the equipment used are included within this test report.
3. For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and which provides a minimum separation distance of 10 mm between this device and the body of the user. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.
4. The Body-Worn stand alone test included AP mode.



2. Description of Equipment under Test (EUT)

Applicant	TP-Link Technologies Co., Ltd. Building 24 (floors 1,3,4,5) and 28 (floors1-4), Central Science and Technology Park, Nanshan, Shenzhen, China 518057		
Manufacture	TP-Link Technologies Co., Ltd. Building 24 (floors 1,3,4,5) and 28 (floors1-4), Central Science and Technology Park, Nanshan, Shenzhen, China 518057		
Product Type	AC1300 High Power Wireless Dual Band USB Adapter		
Trade Name	TP-LINK		
Model Number	Archer T4UHP		
FCC ID	TE7T4UHP		
RF Function	IEEE 802.11b / 802.11g / 802.11n 2.4GHz 20MHz / 802.11n 2.4GHz 40MHz		
	IEEE 802.11a / 802.11n 5GHz 20MHz / 802.11n 5GHz 40MHz		
	IEEE 802.11ac 20MHz / 40MHz / 80MHz		
Tx Frequency	Band	Operate Frequency (MHz)	
	IEEE 802.11b / 802.11g / 802.11n 2.4GHz 20MHz	2412 - 2462	
	IEEE 802.11n 2.4GHz 40MHz	2422 - 2452	
	IEEE 802.11a / 802.11n 5GHz 20MHz / 802.11ac 20MHz	5180 - 5825	
	IEEE 802.11n 5GHz 40MHz / 802.11ac 40MHz	5190 - 5795	
	IEEE 802.11ac 80MHz	5210 - 5775	
*The 2.4GHz support 256QAM.			
RF Conducted Power (Avg.)	Band	Power (W) (dBm)	
	IEEE 802.11b	0.148	21.69
	IEEE 802.11g	0.200	23.01
	IEEE 802.11n 2.4GHz 20MHz	0.242	23.83
	IEEE 802.11n 2.4GHz 40MHz	0.087	19.41
	IEEE 802.11a	0.087	19.39
	IEEE 802.11ac 20MHz	0.173	22.37
	IEEE 802.11ac 40MHz	0.167	22.22
	IEEE 802.11ac 80MHz	0.110	20.43
Antenna Type	Dipole Antenna		
Device Category	Portable Device		
Application Type	Certification		

Note:The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



3. Introduction

The A Test Lab Techno Corp. has performed measurements of the maximum potential exposure to the user of **TP-Link Technologies Co., Ltd. Trade Name : TP-LINK Model(s) : Archer T4UHP**. The test procedures, as described in American National Standards, Institute C95.1-1999(1)were employed and they specify the maximum exposure limit of 1.6mW/g as averaged over any 1 gram of tissue for portable devices being used within 20cm between user and EUT in the uncontrolled environment. A description of the product and operating configuration, detailed summary of the test results, methodology and procedures used in the equipment used are included within this test report.

3.1 SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dw) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Figure 2).

$$\text{SAR} = \frac{d}{dt} \left(\frac{dw}{dm} \right) = \frac{d}{dt} \left(\frac{dw}{\rho dv} \right)$$

Figure 2. **SAR Mathematical Equation**

SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma E^2}{\rho}$$


Where :

- σ = conductivity of the tissue (S/m)
- ρ = mass density of the tissue (kg/m³)
- E = RMS electric field strength (V/m)

*Note :

The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane [2]

4. SAR Measurement Setup

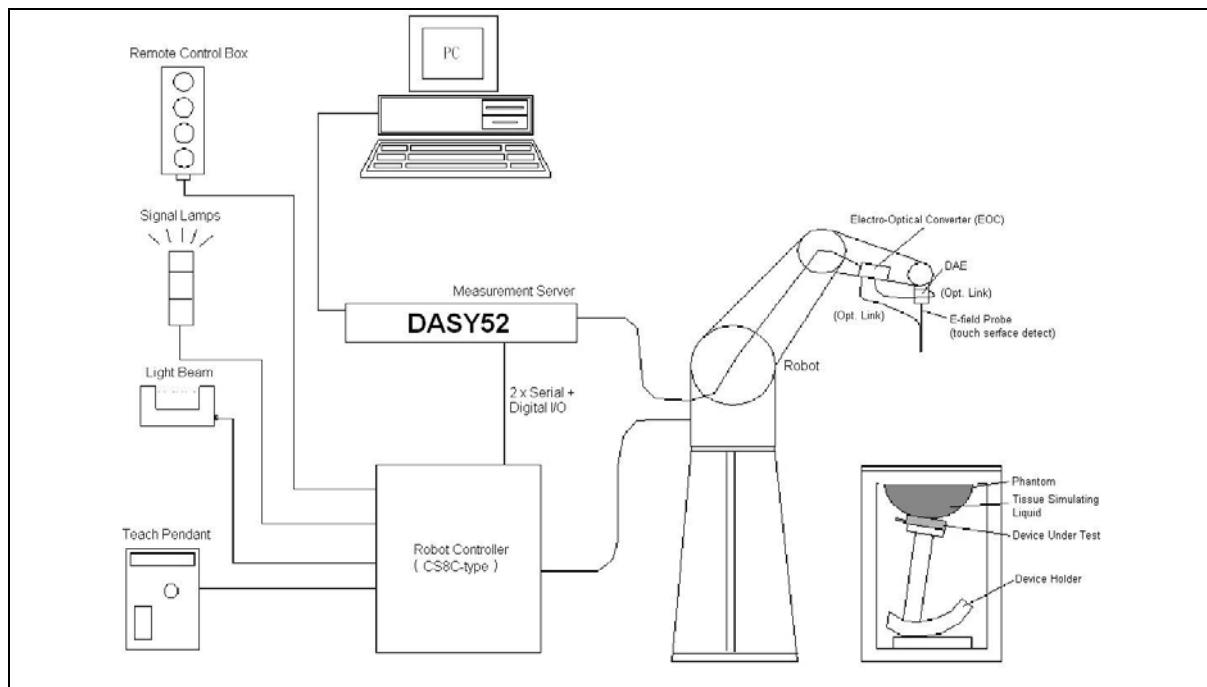

The DASY52 system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Stäubli TX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
5. A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
6. A computer operating Windows 2000 or Windows XP.
7. DASY52 software.
8. Remote controls with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
9. The SAM twin phantom enabling testing left-hand and right-hand usage.
10. The device holder for handheld mobile phones.
11. Tissue simulating liquid mixed according to the given recipes.
12. Validation dipole kits allowing validating the proper functioning of the system.

4.1 DASY E-Field Probe System

The SAR measurements were conducted with the dosimetric probe (manufactured by SPEAG), designed in the classical triangular configuration [3] and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multi-fiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped when reaching the maximum.

4.1.1 E-Field Probe Specification

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in brain tissue (rotation around probe axis) ± 0.5 dB in brain tissue (rotation normal probe axis)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm

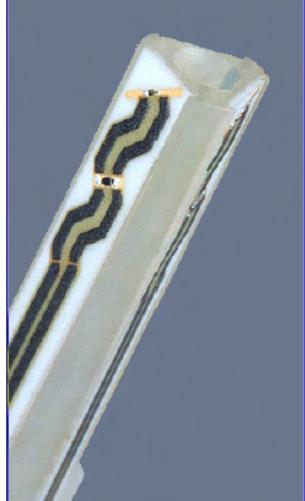


Figure 3. E-field Probe



Figure 4. Probe setup on robot



4.1.2 E-Field Probe Calibration process

Dosimetric Assessment Procedure

Each E-Probe/Probe Amplifier combination has unique calibration parameters. A TEM cell calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm^2) using an RF Signal generator, TEM cell, and RF Power Meter.

Free Space Assessment

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1 mW/cm^2 .

Temperature Assessment

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated head tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where :

Δt = Exposure time (30 seconds),

C = Heat capacity of tissue (head or body),

ΔT = Temperature increase due to RF exposure.

$$\text{Or SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where :

σ = Simulated tissue conductivity,

ρ = Tissue density (kg/m^3).



4.2 Data Acquisition Electronic (DAE) System

Model : DAE3, DAE4
Construction : Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY4/5 embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.
Measurement Range : -100 to +300 mV (16 bit resolution and two range settings: 4mV, 400mV)
Input Offset Voltage : < 5µV (with auto zero)
Input Bias Current : < 50 fA
Dimensions : 60 x 60 x 68 mm

4.3 Robot


Positioner : Stäubli Unimation Corp. Robot Model: TX90XL
Repeatability : ±0.02 mm
No. of Axis : 6

4.4 Measurement Server

Processor : PC/104 with a 400MHz intel ULV Celeron
I/O-board : Link to DAE4 (or DAE3)
16-bit A/D converter for surface detection system
Digital I/O interface
Serial link to robot
Direct emergency stop output for robot

4.5 Device Holder

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon=3$ and loss tangent $\delta=0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

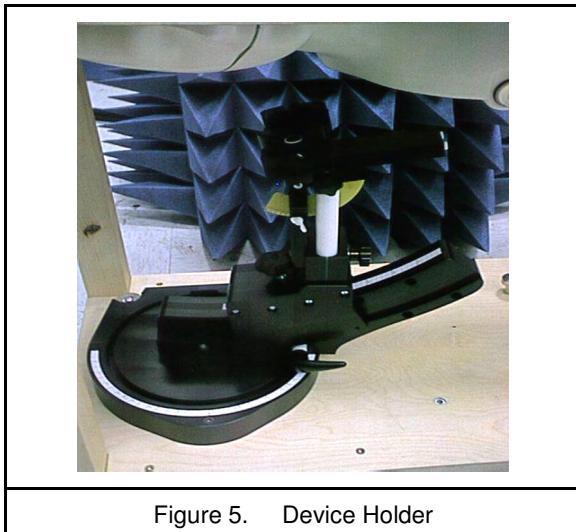

4.6 Oval Flat Phantom - ELI 5.0

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (Oval Flat) phantom defined in IEEE 1528-2013, CENELEC 50361 and IEC 62209-2. It enables the dosimetric evaluation of wireless portable device usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.

Shell Thickness	2 ±0.2 mm
Filling Volume	Approx. 30 liters
Dimensions	190×600×400 mm (H×L×W)
Table 1. Specification of ELI 5.0	

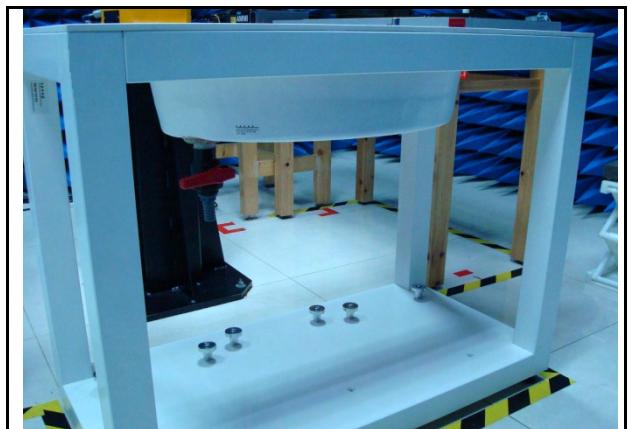


Figure 6. Oval Flat Phantom



4.7 Data Storage and Evaluation

4.7.1 Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension DA4 or DA5. The post processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

4.7.2 Data Evaluation

The DASY post processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software :

- Probe parameters :
 - Sensitivity $Norm_i, ai0, ai1, ai2$
 - Conversion factor $ConvFi$
 - Diode compression point dcp_i
- Device parameters :
 - Frequency f
 - Crest factor cf
- Media parameters :
 - Conductivity σ
 - Density ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as :

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$



With V_i = compensated signal of channel i ($i = x, y, z$)
 U_i = input signal of channel i ($i = x, y, z$)
 cf = crest factor of exciting field (DASY parameter)
 $dcpi$ = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated :

$$E\text{-field probes : } E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

$$H\text{-field probes : } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

with V_i = compensated signal of channel i ($i = x, y, z$)
 $Norm_i$ = sensor sensitivity of channel i ($i = x, y, z$)
 $\mu V/(V/m)2$ for E-field Probes
 $ConvF$ = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude) :

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm³

* Note : That the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = \frac{E_{tot}^2}{3770} \quad \text{or} \quad P_{pwe} = \frac{H_{tot}^2}{37.7}$$



with P_{pwe} = equivalent power density of a plane wave in mW/cm²
 E_{tot} = total electric field strength in V/m
 H_{tot} = total magnetic field strength in A/m



5. **Tissue Simulating Liquids**

The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the tissue.

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an 85070C Dielectric Probe Kit and an E5071B Network Analyzer.

IEEE SCC-34/SC-2 in 1528 recommended Tissue Dielectric Parameters

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in 1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in human head. Other head and body tissue parameters that have not been specified in 1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equation and extrapolated according to the head parameter specified in 1528.

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 - 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

(ϵ_r = relative permittivity, σ = conductivity and ρ = 1000 kg/m³)

Table 2. Tissue dielectric parameters for head and body phantoms



5.1 Ingredients

The following ingredients are used:

- Water: deionized water (pure H₂O), resistivity ≥ 16 MΩ -as basis for the liquid
- Sugar: refined white sugar (typically 99.7 % sucrose, available as crystal sugar in food shops)
-to reduce relative permittivity
- Salt: pure NaCl -to increase conductivity
- Cellulose: Hydroxyethyl-cellulose, medium viscosity (75-125 mPa.s, 2% in water, 20 °C), CAS # 54290 -to increase viscosity and to keep sugar in solution.
- Preservative: Preventol D-7 Bayer AG, D-51368 Leverkusen, CAS # 55965-84-9 -to prevent the spread of bacteria and molds
- DGBE: Diethylenglycol-monobutyl ether (DGBE), Fluka Chemie GmbH, CAS # 112-34-5 -to reduce relative permittivity

5.2 Recipes

The following tables give the recipes for tissue simulating liquids to be used in different frequency bands.

Note: The goal dielectric parameters (at 22 °C) must be achieved within a tolerance of ±5% for ε and ±5% for σ.

Ingredients (% by weight)	Frequency (MHz)												Frequency (GHz)	
	750		835		1750		1900		2450		2600		5GHz	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	39.28	51.30	41.45	52.40	54.50	40.20	54.90	40.40	62.70	73.20	60.30	71.40	65.5	78.6
Salt (NaCl)	1.47	1.42	1.45	1.50	0.17	0.49	0.18	0.50	0.50	0.10	0.60	0.20	0.00	0.00
Sugar	58.15	46.18	56.00	45.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
HEC	1.00	1.00	1.00	1.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Bactericide	0.10	0.10	0.10	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Triton X-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	17.2	10.7
DGBE	0.00	0.00	0.00	0.00	45.33	59.31	44.92	59.10	36.80	26.70	39.10	28.40	0.00	0.00
Dielectric Constant	41.88	54.60	42.54	56.10	40.10	53.60	39.90	54.00	39.80	52.50	39.80	52.50	0.00	0.00
Conductivity (S/m)	0.90	0.97	0.91	0.95	1.39	1.49	1.42	1.45	1.88	1.78	1.88	1.78	0.00	0.00
Diethylene Glycol Mono-hexlether	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	17.3	10.7

Salt: 99+% Pure Sodium Chloride

Sugar: 98+% Pure Sucrose

Water: De-ionized, 16 MΩ + resistivity


HEC: Hydroxyethyl Cellulose

DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra pure): Polyethylene glycol mono [4-(1,1, 3-tetramethylbutyl)phenyl]ether

5.3 Liquid Depth

According to KDB865664 ,the depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm with $\leq \pm 0.5$ cm variation for SAR measurements ≤ 3 GHz and ≥ 10.0 cm with $\leq \pm 0.5$ cm variation for measurements > 3 GHz.

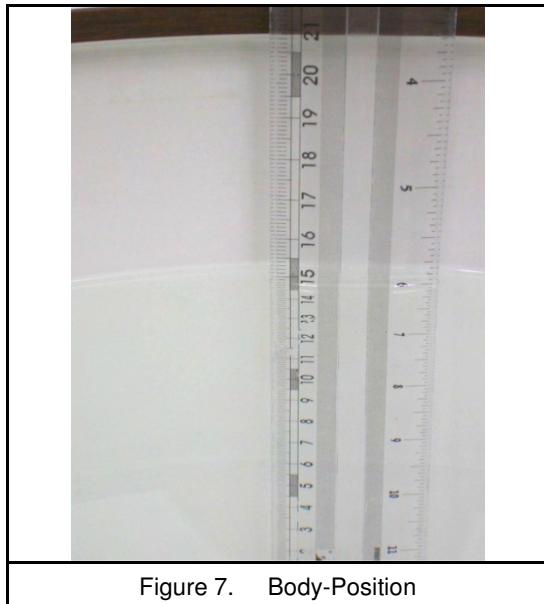



6. SAR Testing with RF Transmitters

6.1 SAR Testing with 802.11 Transmitters

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- $\leq 0.4 \text{ W/kg}$, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- $> 0.4 \text{ W/kg}$, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closest/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is $\leq 0.8 \text{ W/kg}$ or all required test positions are tested.
 - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is $> 0.8 \text{ W/kg}$, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is $\leq 1.2 \text{ W/kg}$ or all required test channels are considered.
 - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is $\leq 1.2 \text{ W/kg}$, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is $\leq 1.2 \text{ W/kg}$, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the Maximum Value of SAR (measured). The position that produced the highest Maximum Value of SAR is considered the worst case position; thus used as the initial test position.



6.2 Conducted Power

Test Mode	Data Rate (Mbps)	Frequency (MHz)	Average Output Power (dBm)		
			Ant-0	Ant-1	Ant-0+1
IEEE 802.11b	1	2412	18.00	---	---
		2437	19.70	---	---
		2462	21.69	---	---
	2	2437	19.65	---	---
	5.5	2437	19.64	---	---
	11	2437	19.60	---	---
IEEE 802.11g	6	2412	18.90	---	---
		2437	23.01	---	---
		2462	17.44	---	---
	9	2437	22.99	---	---
	12	2437	22.98	---	---
	18	2437	22.93	---	---
	24	2437	22.97	---	---
	36	2437	22.95	---	---
	48	2437	22.94	---	---
	54	2437	22.91	---	---
IEEE 802.11n 2.4GHz, 20MHz	13	2412	14.35	13.97	17.17
		2437	21.01	20.63	23.83
		2462	13.08	13.20	16.15
	26	2437	20.99	20.59	23.80
	39	2437	20.94	20.56	23.76
	52	2437	20.98	20.55	23.78
	78	2437	20.93	20.61	23.78
	104	2437	20.95	20.55	23.76
	117	2437	20.97	20.54	23.77
	130	2437	20.90	20.60	23.76
	156	2437	20.92	20.58	23.76
	IEEE 802.11n 2.4GHz, 40MHz	2422	13.24	12.78	16.03
		2437	16.47	16.33	19.41
		2452	14.67	14.93	17.81
		54	2437	16.46	16.24
		81	2437	16.44	16.25
		108	2437	16.40	16.27
		162	2437	16.45	16.20
		216	2437	16.38	16.29
		243	2437	16.41	16.30
		135	2437	16.44	16.22
		324	2437	16.39	16.24
		360	2437	16.37	16.28



Test Mode	Data Rate (Mbps)	Frequency (MHz)	Average Output Power (dBm)		
			Ant-0	Ant-1	Ant-0+1
IEEE 802.11a	6	5180	17.15	---	---
		5200	19.12	---	---
		5220	19.08	---	---
		5240	19.11	---	---
		5260	19.26	---	---
		5280	19.35	---	---
		5300	19.14	---	---
		5320	18.01	---	---
		5500	19.00	---	---
		5520	19.18	---	---
		5540	18.97	---	---
		5560	19.00	---	---
		5580	19.09	---	---
		5660	19.19	---	---
	54	5680	19.12	---	---
		5700	15.96	---	---
		5745	19.26	---	---
		5765	19.22	---	---
		5785	19.27	---	---
		5805	19.35	---	---
		5825	19.39	---	---
		5180	17.04	---	---
		5200	19.00	---	---
		5220	18.95	---	---
		5240	19.01	---	---
		5260	19.13	---	---
		5280	19.22	---	---
		5300	19.03	---	---
		5320	17.89	---	---
		5500	18.97	---	---
		5520	19.10	---	---
		5540	18.90	---	---
		5560	18.89	---	---
		5580	19.00	---	---
		5660	19.16	---	---
		5680	19.03	---	---
		5700	15.84	---	---
		5745	19.14	---	---
		5765	19.09	---	---
		5785	19.17	---	---
		5805	19.22	---	---
		5825	19.26	---	---



Test Mode	Data Rate (Mbps)	Frequency (MHz)	Average Output Power (dBm)		
			Ant-0	Ant-1	Ant-0+1
IEEE 802.11ac 20MHz	13	5180	19.17	19.24	22.22
		5200	19.21	19.07	22.15
		5220	19.22	19.02	22.13
		5240	19.24	19.25	22.26
		5260	19.34	19.38	22.37
		5280	19.11	19.17	22.15
		5300	19.21	19.22	22.23
		5320	19.26	19.03	22.16
		5500	18.70	18.23	21.48
		5520	18.79	17.81	21.34
		5540	18.91	18.04	21.51
		5560	18.93	18.63	21.79
		5580	19.16	18.33	21.78
		5660	18.84	18.57	21.72
		5680	18.99	18.34	21.69
	156	5700	19.13	18.26	21.73
		5745	17.92	17.33	20.65
		5765	17.91	17.05	20.51
		5785	18.23	17.28	20.79
		5805	17.95	17.21	20.61
		5825	17.94	17.25	20.62
		5180	19.12	19.18	22.16
		5200	19.13	19.03	22.09
		5220	19.21	18.94	22.09
		5240	19.18	19.19	22.20
		5260	19.31	19.35	22.34
		5280	19.06	19.13	22.11
		5300	19.17	19.20	22.20
		5320	19.17	18.88	22.04
		5500	18.63	18.03	21.35
		5520	18.71	17.79	21.28
		5540	18.87	17.89	21.42
		5560	18.91	17.93	21.46
		5580	19.06	18.09	21.61
		5660	18.76	18.01	21.41
		5680	18.81	17.82	21.35
		5700	18.73	17.82	21.31
		5745	17.88	17.01	20.48
		5765	17.82	16.97	20.43
		5785	18.19	17.25	20.76
		5805	17.85	17.14	20.52
		5825	17.84	17.05	20.47



Test Mode	Data Rate (Mbps)	Frequency (MHz)	Average Output Power (dBm)		
			Ant-0	Ant-1	Ant-0+1
IEEE 802.11ac 40MHz	27	5190	19.26	19.11	22.20
		5230	19.17	19.08	22.14
		5270	19.19	19.13	22.17
		5310	16.37	16.76	19.58
		5510	17.40	17.88	20.66
		5550	17.32	17.78	20.57
		5670	17.36	17.59	20.49
		5755	16.83	16.77	19.81
		5795	16.79	15.98	19.41
		5190	19.23	19.04	22.15
IEEE 802.11ac 80MHz	360	5230	19.09	19.08	22.10
		5270	19.16	19.09	22.14
		5310	16.24	16.65	19.46
		5510	17.33	17.81	20.59
		5550	17.21	17.72	20.48
		5670	17.34	17.44	20.40
		5755	16.79	16.69	19.75
		5795	16.71	15.94	19.35

Test Mode	Data Rate (Mbps)	Frequency (MHz)	Average Output Power (dBm)		
			Ant-0	Ant-1	Ant-0+1
IEEE 802.11ac 80MHz	58.6	5210	14.93	14.57	17.76
		5290	14.65	14.40	17.54
		5530	15.49	15.49	18.50
		5775	17.04	16.47	19.77
	780	5210	14.83	14.47	17.66
		5290	14.52	14.30	17.42
		5530	15.36	15.38	18.38
		5775	16.99	16.44	19.73



6.3 Antenna location

Antenna-User (mm)		
Side	WLAN_ANT-0	WLAN_ANT-1
End Side	5	5
Bottom Side	5	5

6.4 Stand-alone SAR Evaluate

Stand-alone transmission configurations as below:

Band	End Side	Bottom Side
IEEE 802.11b	V	V
IEEE 802.11g	-	-
IEEE 802.11n 2.4GHz 20MHz	V	V
IEEE 802.11n 2.4GHz 40MHz	V	V
IEEE 802.11a	V	V
IEEE 802.11ac 20MHz	V	V
IEEE 802.11ac 40MHz	V	V
IEEE 802.11ac 80MHz	V	V

- Note:
1. Stand-alone SAR is required when SAR must be measured for all sides and surfaces with a transmitting antenna located within 25 mm from that surface or edge, detail refer antenna location.
 2. The "-" on behalf of Stand-alone SAR is not required (Refer to KDB447498 D01 v06 4.3.1 for the Standalone SAR test exclusion considerations)



Antenna	Operate Band	Channel	Frequency (GHz)	Tune-Power		Calculated value and evaluated result (mm)	
				(dBm)	(mW)	End Side	Bottom Side
WLAN ANT-0	IEEE 802.11 b	11	2.462	21.9	155	48.6 MEASURE	48.6 MEASURE
	IEEE 802.11 g	11	2.462	23.2	209	65.6 MEASURE	65.6 MEASURE
	IEEE 802.11 n 2.4GHz, 20MHz	11	2.462	21.3	135	42.4 MEASURE	42.4 MEASURE
	IEEE 802.11 n 2.4GHz, 40MHz	11	2.462	16.7	47	14.7 MEASURE	14.7 MEASURE
	IEEE 802.11a Band I	48	5.240	19.5	89	40.7 MEASURE	40.7 MEASURE
	IEEE 802.11a Band II-A	64	5.320	19.5	89	41.1 MEASURE	41.1 MEASURE
	IEEE 802.11a Band II-C	128	5.640	19.5	89	42.3 MEASURE	42.3 MEASURE
	IEEE 802.11a Band III	165	5.825	19.5	89	43 MEASURE	43 MEASURE
	IEEE 802.11ac 20MHz, Band I	48	5.240	19.5	89	40.7 MEASURE	40.7 MEASURE
	IEEE 802.11ac 20MHz, Band II-A	64	5.320	19.5	89	41.1 MEASURE	41.1 MEASURE
	IEEE 802.11ac 20MHz, Band II-C	128	5.640	19.5	89	42.3 MEASURE	42.3 MEASURE
	IEEE 802.11ac 20MHz, Band III	165	5.825	19.5	89	43 MEASURE	43 MEASURE
	IEEE 802.11ac 40MHz, Band I	46	5.230	19.5	89	40.7 MEASURE	40.7 MEASURE
	IEEE 802.11ac 40MHz, Band II-A	62	5.310	19.5	89	41 MEASURE	41 MEASURE
	IEEE 802.11ac 40MHz, Band II-C	126	5.630	19.5	89	42.2 MEASURE	42.2 MEASURE
	IEEE 802.11ac 40MHz, Band III	159	5.795	19.5	89	42.8 MEASURE	42.8 MEASURE
	IEEE 802.11ac 80MHz, Band I	42	5.210	18	63	28.8 MEASURE	28.8 MEASURE
	IEEE 802.11ac 80MHz, Band II-A	58	5.290	18	63	29 MEASURE	29 MEASURE
	IEEE 802.11ac 80MHz, Band II-C	112	5.560	18	63	29.7 MEASURE	29.7 MEASURE
	IEEE 802.11ac 80MHz, Band III	155	5.775	18	63	30.3 MEASURE	30.3 MEASURE



Antenna	Operate Band	Channel	Frequency (GHz)	Tune-Power		Calculated value and evaluated result (mm)	
				(dBm)	(mW)	End Side	Bottom Side
WLAN ANT-1	IEEE 802.11 n 2.4GHz, 20MHz	11	2.462	20.9	123	39.5 MEASURE	39.5 MEASURE
	IEEE 802.11 n 2.4GHz, 40MHz	11	2.462	16.6	46	14.1 MEASURE	14.1 MEASURE
	IEEE 802.11ac 20MHz, Band I	48	5.240	19.5	89	40.7 MEASURE	40.7 MEASURE
	IEEE 802.11ac 20MHz, Band II-A	64	5.320	19.5	89	41.1 MEASURE	41.1 MEASURE
	IEEE 802.11ac 20MHz, Band II-C	128	5.640	19.5	89	42.3 MEASURE	42.3 MEASURE
	IEEE 802.11ac 20MHz, Band III	165	5.825	19.5	89	43 MEASURE	43 MEASURE
	IEEE 802.11ac 40MHz, Band I	46	5.230	19.5	89	40.7 MEASURE	40.7 MEASURE
	IEEE 802.11ac 40MHz, Band II-A	62	5.310	19.5	89	41 MEASURE	41 MEASURE
	IEEE 802.11ac 40MHz, Band II-C	126	5.630	19.5	89	42.2 MEASURE	42.2 MEASURE
	IEEE 802.11ac 40MHz, Band III	159	5.795	19.5	89	42.8 MEASURE	42.8 MEASURE
	IEEE 802.11ac 80MHz, Band I	42	5.210	17.5	56	25.6 MEASURE	25.6 MEASURE
	IEEE 802.11ac 80MHz, Band II-A	58	5.290	17.5	56	25.8 MEASURE	25.8 MEASURE
	IEEE 802.11ac 80MHz, Band II-C	112	5.560	17.5	56	26.4 MEASURE	26.4 MEASURE
	IEEE 802.11ac 80MHz, Band III	155	5.775	17.5	56	26.9 MEASURE	26.9 MEASURE

- Note:
1. Calculated Value include string "mW", that is mean through compare output power with threshold, if the output power more than threshold value the SAR test should be perform. Otherwise, the SAR test could be exempt. (> 50mm).
 2. Calculated Value only include number format, that is mean through compare output power with threshold, if the Calculated value more than 3 the SAR test should be perform. Otherwise, the SAR test could be exempt. (<50mm).
 3. When an antenna qualifies for the standalone SAR test exclusion of KDB 447498 section 4.3.1 and also transmits simultaneously with other antennas, the standalone SAR value must be estimated according to KDB 447498 section "4.3.2. Simultaneous transmission SAR tests exclusion considerations b)".
 4. We used highest frequency and power, that result should be evaluated the worst case.
 5. Power and distance are rounded to the nearest mW and mm before calculation.
 6. The result is rounded to one decimal place for comparison.



6.5 Simultaneous Transmitting Evaluate

Simultaneous transmission configurations as below:

Condition	Side	Frequency Band	
		WLAN ANT-0	WLAN ANT-1
1	End Side	V	V
2	Bottom Side	V	V

Estimated SAR: reference to FCC KDB inquiry tracking number: 874913

Since product form was special. Therefore, the test evaluation via KDB inquiry and FCC response this test has two mode test required.

For this product the estimated SAR is not available, this evaluation has no exempt test item.

6.5.1 Sum of 1-g SAR of all simultaneously transmitting

When the sum of 1-g SAR of all simultaneously transmitting antennas in and operating mode and exposure condition combination is within the SAR limit, SAR test exclusion applies to that simultaneous transmission configuration.

Sum of 1-g SAR of summary as below:

Phantom Position		Spacing (mm)	ASSY	MIMO		Event
				Band	SAR ^{1g} (W/kg)	
Flat	End Side	10	N/A	IEEE 802.11 n 2.4GHz, 20MHz	0.89	<1.6
		10	N/A	IEEE 802.11ac 80MHz	0.5	<1.6

Phantom Position		Spacing (mm)	ASSY	WLAN ANT-0		WLAN ANT-1		Σ SAR ^{1g} (W/kg)	Event
				Band	SAR ^{1g} (W/kg)	Band	SAR ^{1g} (W/kg)		
Flat	Bottom Side	5	N/A	IEEE 802.11 n 2.4GHz, 20MHz	0.08	IEEE 802.11 n 2.4GHz, 20MHz	0.07	0.15	<1.6
		5	N/A	IEEE 802.11ac 80MHz	0.23	IEEE 802.11ac 80MHz	0.24	0.47	<1.6

- Note: 1. * =Estimated SAR
2. **The Estimated SAR 0.4W/Kg , test separation distances is > 50 mm
3. When the sum of 1-g SAR of all simultaneously transmitting antennas in and operating mode and exposure condition combination is within the SAR limit, SAR test exclusion applies to that simultaneous transmission configuration.



6.5.2 SAR to peak location separation ratio (SPLSR)

When the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR to peak location separation ratio. The ratio is determined by $(\text{SAR1} + \text{SAR2})^{1.5}/R_i$, rounded to two decimal digits, and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

All of sum of SAR $< 1.6 \text{ W/kg}$, therefore SPLSR is not required.

6.6 SAR test reduction according to KDB

General:

- The test data reported are the worst-case SAR value with the position set in a typical configuration.
Test procedures used were according to FCC, Supplement C [June 2001], IEEE1528-2013.
- All modes of operation were investigated, and worst-case results are reported.
- Tissue parameters and temperatures are listed on the SAR plots.
- Batteries are fully charged for all readings.
- When the Channel's SAR 1g of maximum conducted power is $> 0.8 \text{ mW/g}$, low, middle and high channel are supposed to be tested.

KDB 447498:

- The test data reported are the worst-case SAR value with the position set in a typical configuration.
Test procedures used were according to IEEE1528-2013.

KDB 865664:

- Repeated measurement is not required when the original highest measured SAR is $< 0.80 \text{ W/kg}$.
- When the original highest measured SAR is $\geq 0.80 \text{ W/kg}$, repeat that measurement once.
- Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is $\geq 1.45 \text{ W/kg}$.
- Perform a third repeated measurement only if the original, first or second repeated measurement is $\geq 1.5 \text{ W/kg}$ and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .


KDB 248227:

- Refer 6.4 SAR Testing with 802.11 Transmitters.

7. System Verification and Validation

7.1 Symmetric Dipoles for System Verification

Construction	Symmetrical dipole with I/4 balun enables measurement of feed point impedance with NWA matched for use near flat phantoms filled with head simulating solutions Includes distance holder and tripod adaptor Calibration Calibrated SAR value for specified position and input power at the flat phantom in head simulating solutions.
Frequency	2450, 5200, 5500 and 5800 MHz
Return Loss	> 20 dB at specified verification position
Power Capability	> 100 W (f < 1GHz); > 40 W (f > 1GHz)
Options	Dipoles for other frequencies or solutions and other calibration conditions are available upon request
Dimensions	D2450V2: dipole length 51.5 mm; overall height 300 mm D5GHzV2: dipole length 20.6 mm; overall height 300 mm

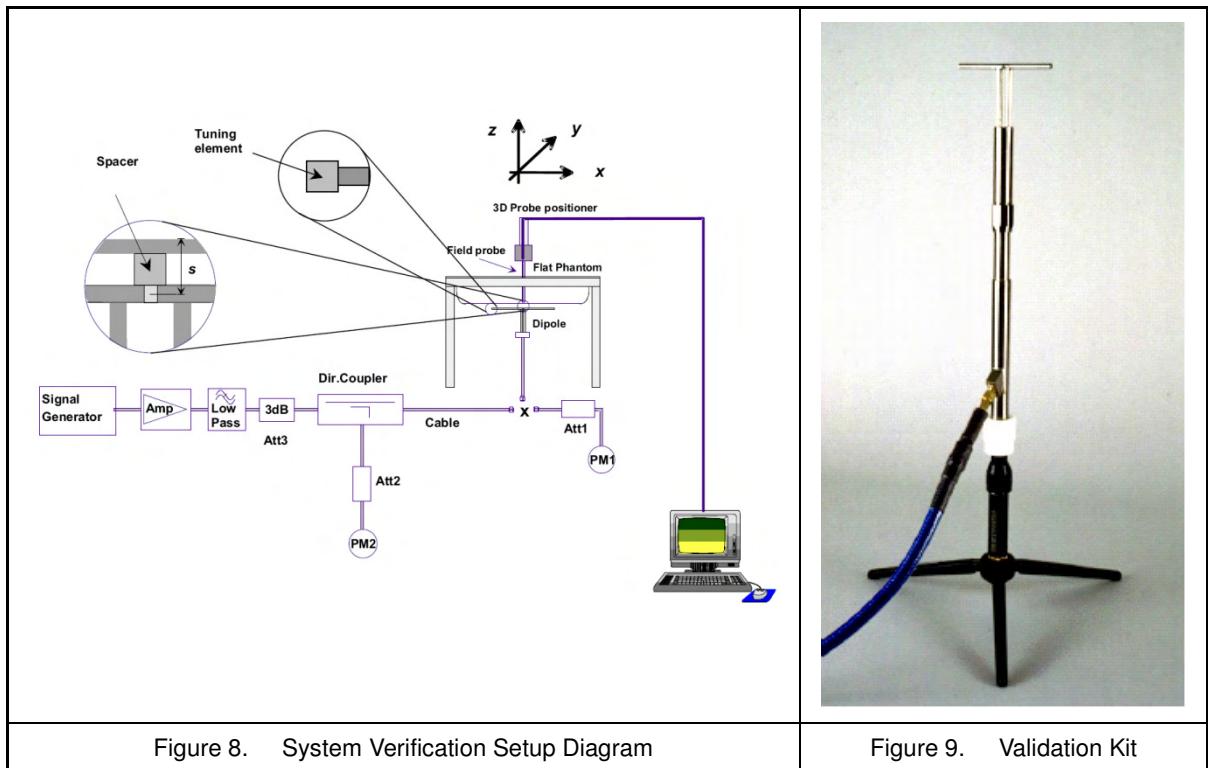

7.2 Liquid Parameters

Liquid Verify								
Ambient Temperature : 22 ± 2 °C ; Relative Humidity : 40 -70%								
Liquid Type	Frequency	Temp (°C)	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)	Measured Date
2450MHz (Body)	2400MHz	22	εr	52.77	52.71	-0.19	± 5	Nov. 21, 2016
			σ	1.902	1.919	1.05	± 5	
	2450MHz	22	εr	52.70	52.40	-0.57	± 5	
			σ	1.950	1.964	0.51	± 5	
	2500MHz	22	εr	52.64	52.42	-0.38	± 5	
			σ	2.021	2.049	1.49	± 5	
	2400MHz	22	εr	52.77	52.71	-0.19	± 5	
			σ	1.902	1.919	1.05	± 5	
2450MHz (Body)	2450MHz	22	εr	52.70	52.40	-0.57	± 5	Nov. 22, 2016
			σ	1.950	1.964	0.51	± 5	
	2500MHz	22	εr	52.64	52.42	-0.38	± 5	
			σ	2.021	2.049	1.49	± 5	
	2400MHz	22	εr	52.77	52.71	-0.19	± 5	
			σ	1.902	1.919	1.05	± 5	
	2450MHz	22	εr	52.70	52.40	-0.57	± 5	
			σ	1.950	1.964	0.51	± 5	
	2500MHz	22	εr	52.64	52.42	-0.38	± 5	
			σ	2.021	2.049	1.49	± 5	
2450MHz (Body)	2400MHz	22	εr	52.77	52.71	-0.19	± 5	Dec. 13, 2016
			σ	1.902	1.919	1.05	± 5	
	2450MHz	22	εr	52.70	52.40	-0.57	± 5	
			σ	1.950	1.964	0.51	± 5	
	2500MHz	22	εr	52.64	52.42	-0.38	± 5	
			σ	2.021	2.049	1.49	± 5	
	5150MHz	22	εr	49.08	48.80	-0.61	± 5	
			σ	5.241	5.167	-1.34	± 5	
5200MHz (Body)	5200MHz	22	εr	49.01	48.77	-0.41	± 5	Nov. 02, 2016
			σ	5.299	5.245	-0.94	± 5	
	5250MHz	22	εr	48.95	48.59	-0.61	± 5	
			σ	5.358	5.304	-1.12	± 5	
	5150MHz	22	εr	49.08	48.80	-0.61	± 5	
			σ	5.241	5.167	-1.34	± 5	
	5200MHz	22	εr	49.01	48.77	-0.41	± 5	
			σ	5.299	5.245	-0.94	± 5	
	5250MHz	22	εr	48.95	48.59	-0.61	± 5	
			σ	5.358	5.304	-1.12	± 5	

Table 3. Measured Tissue dielectric parameters for body phantoms -1

Liquid Verify								
Ambient Temperature : 22 ± 2 °C ; Relative Humidity : 40 -70%								
Liquid Type	Frequency	Temp (°C)	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)	Measured Date
5200MHz (Body)	5150MHz	22	εr	49.08	48.80	-0.61	± 5	Nov. 07, 2016
			σ	5.241	5.167	-1.34	± 5	
	5200MHz	22	εr	49.01	48.77	-0.41	± 5	
			σ	5.299	5.245	-0.94	± 5	
	5250MHz	22	εr	48.95	48.59	-0.61	± 5	
			σ	5.358	5.304	-1.12	± 5	
	5150MHz	22	εr	49.08	48.80	-0.61	± 5	
			σ	5.241	5.167	-1.34	± 5	
5200MHz (Body)	5200MHz	22	εr	49.01	48.77	-0.41	± 5	Nov. 08, 2016
			σ	5.299	5.245	-0.94	± 5	
	5250MHz	22	εr	48.95	48.59	-0.61	± 5	
			σ	5.358	5.304	-1.12	± 5	
	5150MHz	22	εr	49.08	48.80	-0.61	± 5	
			σ	5.241	5.167	-1.34	± 5	
	5200MHz	22	εr	49.01	48.77	-0.41	± 5	
			σ	5.299	5.245	-0.94	± 5	
5200MHz (Body)	5250MHz	22	εr	48.95	48.59	-0.61	± 5	Nov. 09, 2016
			σ	5.358	5.304	-1.12	± 5	
	5450MHz	22	εr	48.68	48.23	-1.03	± 5	
			σ	5.591	5.634	0.72	± 5	
	5500MHz	22	εr	48.61	48.07	-1.03	± 5	
			σ	5.650	5.683	0.53	± 5	
	5550MHz	22	εr	48.54	47.95	-1.24	± 5	
			σ	5.708	5.785	1.40	± 5	
5500MHz (Body)	5450MHz	22	εr	48.68	48.23	-1.03	± 5	Nov. 02, 2016
			σ	5.591	5.634	0.72	± 5	
	5500MHz	22	εr	48.61	48.07	-1.03	± 5	
			σ	5.650	5.683	0.53	± 5	
	5550MHz	22	εr	48.54	47.95	-1.24	± 5	
			σ	5.708	5.785	1.40	± 5	
	5450MHz	22	εr	48.68	48.23	-1.03	± 5	
			σ	5.591	5.634	0.72	± 5	
5500MHz (Body)	5500MHz	22	εr	48.61	48.07	-1.03	± 5	Nov. 03, 2016
			σ	5.650	5.683	0.53	± 5	
	5550MHz	22	εr	48.54	47.95	-1.24	± 5	
			σ	5.708	5.785	1.40	± 5	

Table 4. Measured Tissue dielectric parameters for body phantoms -2

Liquid Verify								
Ambient Temperature : 22 ± 2 °C ; Relative Humidity : 40 -70%								
Liquid Type	Frequency	Temp (°C)	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)	Measured Date
5500MHz (Body)	5450MHz	22	εr	48.68	48.23	-1.03	± 5	Nov. 07, 2016
			σ	5.591	5.634	0.72	± 5	
	5500MHz	22	εr	48.61	48.07	-1.03	± 5	
			σ	5.650	5.683	0.53	± 5	
	5550MHz	22	εr	48.54	47.95	-1.24	± 5	
			σ	5.708	5.785	1.40	± 5	
	5450MHz	22.0	εr	48.68	48.23	-1.03	± 5	
			σ	5.591	5.634	0.72	± 5	
5500MHz (Body)	5500MHz	22.0	εr	48.61	48.07	-1.03	± 5	Nov. 08, 2016
			σ	5.650	5.683	0.53	± 5	
	5550MHz	22.0	εr	48.54	47.95	-1.24	± 5	
			σ	5.708	5.785	1.40	± 5	
	5450MHz	22.0	εr	48.68	48.23	-1.03	± 5	
			σ	5.591	5.634	0.72	± 5	
	5500MHz	22.0	εr	48.61	48.07	-1.03	± 5	
			σ	5.650	5.683	0.53	± 5	
5800MHz (Body)	5550MHz	22.0	εr	48.54	47.95	-1.24	± 5	Nov. 09, 2016
			σ	5.708	5.785	1.40	± 5	
	5750MHz	22	εr	48.27	47.46	-1.66	± 5	
			σ	5.942	6.036	1.68	± 5	
	5800MHz	22	εr	48.20	47.28	-1.87	± 5	
			σ	6.000	6.131	2.17	± 5	
	5850MHz	22	εr	48.20	47.23	-2.08	± 5	
			σ	6.000	6.202	3.33	± 5	
5800MHz (Body)	5750MHz	22	εr	48.27	47.46	-1.66	± 5	Nov. 02, 2016
			σ	5.942	6.036	1.68	± 5	
	5800MHz	22	εr	48.20	47.28	-1.87	± 5	
			σ	6.000	6.131	2.17	± 5	
	5850MHz	22	εr	48.20	47.23	-2.08	± 5	
			σ	6.000	6.202	3.33	± 5	

Table 5. Measured Tissue dielectric parameters for body phantoms -3



Liquid Verify								
Ambient Temperature : 22 ± 2 °C ; Relative Humidity : 40 -70%								
Liquid Type	Frequency	Temp (°C)	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)	Measured Date
5800MHz (Body)	5750MHz	22	εr	48.27	47.46	-1.66	± 5	Nov. 07, 2016
			σ	5.942	6.036	1.68	± 5	
	5800MHz	22	εr	48.20	47.28	-1.87	± 5	
			σ	6.000	6.131	2.17	± 5	
	5850MHz	22	εr	48.20	47.23	-2.08	± 5	
			σ	6.000	6.202	3.33	± 5	
5800MHz (Body)	5750MHz	22	εr	48.27	47.46	-1.66	± 5	Nov. 08, 2016
			σ	5.942	6.036	1.68	± 5	
	5800MHz	22	εr	48.20	47.28	-1.87	± 5	
			σ	6.000	6.131	2.17	± 5	
	5850MHz	22	εr	48.20	47.23	-2.08	± 5	
			σ	6.000	6.202	3.33	± 5	
5800MHz (Body)	5750MHz	22	εr	48.27	47.46	-1.66	± 5	Nov. 09, 2016
			σ	5.942	6.036	1.68	± 5	
	5800MHz	22	εr	48.20	47.28	-1.87	± 5	
			σ	6.000	6.131	2.17	± 5	
	5850MHz	22	εr	48.20	47.23	-2.08	± 5	
			σ	6.000	6.202	3.33	± 5	
5800MHz (Body)	5750MHz	22	εr	48.27	47.46	-1.66	± 5	Dec. 14, 2016
			σ	5.942	6.036	1.68	± 5	
	5800MHz	22	εr	48.20	47.28	-1.87	± 5	
			σ	6.000	6.131	2.17	± 5	
	5850MHz	22	εr	48.20	47.23	-2.08	± 5	
			σ	6.000	6.202	3.33	± 5	

Table 6. Measured Tissue dielectric parameters for body phantoms -4



7.3 Verification Summary

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of $\pm 7\%$. The verification was performed at 2450, 5200, 5500 and 5800MHz.

Mixture Type	Frequency (MHz)	Power	SAR _{1g} (W/Kg)	SAR _{10g} (W/Kg)	Drift (dB)	Difference percentage		Probe	Dipole	1W Target		Date
						1g	10g			Model / Serial No.	Model / Serial No.	
Body	2450	250 mW	13	6.01	0.01	-0.2%	-1.9%	EX3DV4 SN:3977	D2450V2 SN:712	52.10	24.50	Nov. 21, 2016
		Normalize to 1 Watt	52.00	24.04								
Body	2450	250 mW	13	6.06	-0.02	-0.2%	-1.1%	EX3DV4 SN:3977	D2450V2 SN:712	52.10	24.50	Nov. 22, 2016
		Normalize to 1 Watt	52.00	24.24								
Body	2450	250 mW	13.5	6.15	0.02	3.6%	0.4%	EX3DV4 SN:3977	D2450V2 SN:712	52.10	24.50	Dec. 13, 2016
		Normalize to 1 Watt	54.00	24.60								
Body	5200	100 mW	7.41	2.06	0.16	-2.1%	-3.7%	EX3DV4 SN:3977	D5200V2 SN:1021	75.70	21.40	Nov. 02, 2016
		Normalize to 1 Watt	74.10	20.60								
Body	5200	100 mW	7.92	2.2	0.12	4.6%	2.8%	EX3DV4 SN:3977	D5200V2 SN:1021	75.70	21.40	Nov. 03, 2016
		Normalize to 1 Watt	79.20	22.00								
Body	5200	100 mW	7.67	2.16	0.08	1.3%	0.9%	EX3DV4 SN:3977	D5200V2 SN:1021	75.70	21.40	Nov. 07, 2016
		Normalize to 1 Watt	76.70	21.60								
Body	5200	100 mW	7.89	2.18	0.11	4.2%	1.9%	EX3DV4 SN:3977	D5200V2 SN:1021	75.70	21.40	Nov. 08, 2016
		Normalize to 1 Watt	78.90	21.80								
Body	5200	100 mW	7.87	2.18	0.16	4.0%	1.9%	EX3DV4 SN:3977	D5200V2 SN:1021	75.70	21.40	Nov. 09, 2016
		Normalize to 1 Watt	78.70	21.80								
Body	5500	100 mW	8.26	2.28	0.11	0.4%	-0.9%	EX3DV4 SN:3977	D5500V2 SN:1021	82.30	23.00	Nov. 02, 2016
		Normalize to 1 Watt	82.60	22.80								
Body	5500	100 mW	8.61	2.37	0.13	4.6%	3.0%	EX3DV4 SN:3977	D5500V2 SN:1021	82.30	23.00	Nov. 03, 2016
		Normalize to 1 Watt	86.10	23.70								
Body	5500	100 mW	8.04	2.25	-0.04	-2.3%	-2.2%	EX3DV4 SN:3977	D5500V2 SN:1021	82.30	23.00	Nov. 07, 2016
		Normalize to 1 Watt	80.40	22.50								
Body	5500	100 mW	8.39	2.31	0.06	1.9%	0.4%	EX3DV4 SN:3977	D5500V2 SN:1021	82.30	23.00	Nov. 08, 2016
		Normalize to 1 Watt	83.90	23.10								
Body	5500	100 mW	8.53	2.35	0.12	3.6%	2.2%	EX3DV4 SN:3977	D5500V2 SN:1021	82.30	23.00	Nov. 09, 2016
		Normalize to 1 Watt	85.30	23.50								
Body	5800	100 mW	7.68	2.1	0.11	-0.6%	-1.9%	EX3DV4 SN:3977	D5800V2 SN:1021	77.30	21.40	Nov. 02, 2016
		Normalize to 1 Watt	76.80	21.00								
Body	5800	100 mW	7.99	2.18	0.07	3.4%	1.9%	EX3DV4 SN:3977	D5800V2 SN:1021	77.30	21.40	Nov. 03, 2016
		Normalize to 1 Watt	79.90	21.80								



Mixture Type	Frequency (MHz)	Power	SAR _{1g} (W/Kg)	SAR _{10g} (W/Kg)	Drift (dB)	Difference percentage		Probe	Dipole	1W Target		Date
						1g	10g			Model / Serial No.	Model / Serial No.	
Body	5800	100 mW	7.72	2.14	0.04	-0.1%	0.0%	EX3DV4 SN:3977	D5800V2 SN:1021	77.30	21.40	Nov. 07, 2016
		Normalize to 1 Watt	77.20	21.40								
Body	5800	100 mW	7.95	2.17	0.05	2.8%	1.4%	EX3DV4 SN:3977	D5800V2 SN:1021	77.30	21.40	Nov. 08, 2016
		Normalize to 1 Watt	79.50	21.70								
Body	5800	100 mW	8.04	2.21	0.08	4.0%	3.3%	EX3DV4 SN:3977	D5800V2 SN:1021	77.30	21.40	Nov. 09, 2016
		Normalize to 1 Watt	80.40	22.10								
Body	5800	100 mW	7.99	2.22	0.17	3.4%	3.7%	EX3DV4 SN:3977	D5800V2 SN:1021	77.30	21.40	Dec. 14, 2016
		Normalize to 1 Watt	79.90	22.20								



7.4 Validation Summary

Per FCC KDB 865664 D02 v01r02, SAR system validation status should be documented to confirm measurement accuracy. The SAR systems (including SAR probes, system components and software versions) used for this device were validated against its performance specifications prior to the SAR measurements. Reference dipoles were used with the required tissue-equivalent media for system validation, according to the procedures outlined in IEEE 1528-2013 and FCC KDB 865664 D01v01r04. Since SAR probe calibrations are frequency dependent, each probe calibration point was validated at a frequency within the valid frequency range of the probe calibration point, using the system that normally operates with the probe for routine SAR measurements and according to the required tissue-equivalent media.

A tabulated summary of the system validation status including the validation date(s), measurement frequencies, SAR probes and tissue dielectric parameters as below.

Probe Type Model / Serial No.	Prob Cal. Point (MHz)	Head / Body	Cond.	Perm.	CW Validation			Mod. Validation			Date	
			ϵ_r	σ	Sensitivity	Probe	Probe	Mod. Type	Duty Factor	PAR		
						Linearity	Isotropy					
EX3DV4 SN:3977	2450	Body	52.40	1.964	Pass	Pass	Pass	DSSS.OFDM	N/A	Pass	Nov. 21, 2016	
EX3DV4 SN:3977	2450	Body	52.40	1.964	Pass	Pass	Pass	DSSS.OFDM	N/A	Pass	Nov. 22, 2016	
EX3DV4 SN:3977	2450	Body	52.40	1.964	Pass	Pass	Pass	DSSS.OFDM	N/A	Pass	Dec. 13, 2016	
EX3DV4 SN:3977	5200	Body	48.77	5.245	Pass	Pass	Pass	OFDM	N/A	Pass	Nov. 02, 2016	
EX3DV4 SN:3977	5200	Body	48.77	5.245	Pass	Pass	Pass	OFDM	N/A	Pass	Nov. 03, 2016	
EX3DV4 SN:3977	5200	Body	48.77	5.245	Pass	Pass	Pass	OFDM	N/A	Pass	Nov. 07, 2016	
EX3DV4 SN:3977	5200	Body	48.77	5.245	Pass	Pass	Pass	OFDM	N/A	Pass	Nov. 08, 2016	
EX3DV4 SN:3977	5200	Body	48.77	5.245	Pass	Pass	Pass	OFDM	N/A	Pass	Nov. 09, 2016	
EX3DV4 SN:3977	5500	Body	48.07	5.683	Pass	Pass	Pass	OFDM	N/A	Pass	Nov. 02, 2016	
EX3DV4 SN:3977	5500	Body	48.07	5.683	Pass	Pass	Pass	OFDM	N/A	Pass	Nov. 03, 2016	
EX3DV4 SN:3977	5500	Body	48.07	5.683	Pass	Pass	Pass	OFDM	N/A	Pass	Nov. 07, 2016	
EX3DV4 SN:3977	5500	Body	48.07	5.683	Pass	Pass	Pass	OFDM	N/A	Pass	Nov. 08, 2016	
EX3DV4 SN:3977	5500	Body	48.07	5.683	Pass	Pass	Pass	OFDM	N/A	Pass	Nov. 09, 2016	
EX3DV4 SN:3977	5800	Body	47.28	6.131	Pass	Pass	Pass	OFDM	N/A	Pass	Nov. 02, 2016	
EX3DV4 SN:3977	5800	Body	47.28	6.131	Pass	Pass	Pass	OFDM	N/A	Pass	Nov. 03, 2016	
EX3DV4 SN:3977	5800	Body	47.28	6.131	Pass	Pass	Pass	OFDM	N/A	Pass	Nov. 07, 2016	
EX3DV4 SN:3977	5800	Body	47.28	6.131	Pass	Pass	Pass	OFDM	N/A	Pass	Nov. 08, 2016	
EX3DV4 SN:3977	5800	Body	47.28	6.131	Pass	Pass	Pass	OFDM	N/A	Pass	Nov. 09, 2016	
EX3DV4 SN:3977	5800	Body	47.28	6.131	Pass	Pass	Pass	OFDM	N/A	Pass	Dec. 14, 2016	



8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	2450MHz System Validation Kit	D2450V2	712	Apr. 01, 2016	Apr. 01, 2017
SPEAG	5GHz System Validation Kit	D5GHZV2	1021	Apr. 08, 2016	Apr. 08, 2017
SPEAG	Dosimetric E-Field Probe	EX3DV4	3977	Mar. 09, 2016	Mar. 09, 2017
SPEAG	Data Acquisition Electronics	DAE4	779	Mar. 02, 2016	Mar. 02, 2017
SPEAG	Device Holder	N/A	N/A	NCR	
SPEAG	Measurement Server	SE UMS 011 AA	1025	NCR	
SPEAG	Phantom (ELI V5.0)	QDOVA002AA	TP-1133	NCR	
SPEAG	Robot	Staubli TX90XL	F07/564ZA1/C/01	NCR	
SPEAG	Software	DASY52 V52.8 (8)	N/A	NCR	
SPEAG	Software	SEMCAD X V14.6.10 (7372)	N/A	NCR	
Agilent	Dielectric Probe Kit	85070C	US99360094	NCR	
Agilent	ENA Series Network Analyzer	E5071B	MY42404655	Apr. 13, 2016	Apr. 13, 2017
R&S	Power Sensor	NRP-Z22	100179	NCR	
Agilent	Power Sensor	8481H	3318A20779	Jun. 06, 2016	Jun. 06, 2017
Agilent	Power Meter	EDM Series E4418B	GB40206143	Jun. 06, 2016	Jun. 06, 2017
Anritsu	Power Meter	ML2495A	1135009	Aug. 24, 2016	Aug. 24, 2017
Agilent	MXF-G-B RF Vector Signal Generator	N5182B	MY53050382	May 20, 2016	May 20, 2017
Agilent	Dual Directional Coupler	778D	50334	NCR	
Mini-Circuits	Power Amplifier	ZHL-42W-SMA	D111103#5	NCR	
Mini-Circuits	Power Amplifier	ZVE-8G-SMA	D042005 671800514	NCR	
Aisi	Attenuator	IEAT 3dB	N/A	NCR	

Table 7. Test Equipment List



9. ***Measurement Uncertainty***

Measurement uncertainties in SAR measurements are difficult to quantify due to several variables including biological, physiological, and environmental. However, we estimate the measurement uncertainties in SAR_{1g} to be less than ±21.76 % for 300MHz ~3GHz and 3GHz ~ 6GHz ±25.68 % [8].

According to Std. C95.3[9], the overall uncertainties are difficult to assess and will vary with the type of meter and usage situation. However, accuracy's of ± 1 to 3 dB can be expected in practice, with greater uncertainties in near-field situations and at higher frequencies (shorter wavelengths), or areas where large reflecting objects are present. Under optimum measurement conditions, SAR measurement uncertainties of at least ± 2dB can be expected.

Uncertainty of a Measure SAR of EUT with DASY System

Item	Uncertainty Component	Uncertainty Value	Prob. Dist	Div.	c_i (1g)	c_i (10g)	Std. Unc. (1-g)	Std. Unc. (10-g)	V_i or V_{eff}
Measurement System									
u1	Probe Calibration ($k=1$)	$\pm 6.0\%$	Normal	1	1	1	$\pm 6.0\%$	$\pm 6.0\%$	∞
u2	Axial Isotropy	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 1.9\%$	$\pm 1.9\%$	∞
u3	Hemispherical Isotropy	$\pm 9.6\%$	Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 3.9\%$	$\pm 3.9\%$	
u4	Boundary Effect	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	∞
u5	Linearity	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.7\%$	$\pm 2.7\%$	∞
u6	System Detection Limit	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	∞
u7	Readout Electronics	$\pm 0.3\%$	Normal	1	1	1	$\pm 0.3\%$	$\pm 0.3\%$	∞
u8	Response Time	$\pm 0.8\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.5\%$	$\pm 0.5\%$	∞
u9	Integration Time	$\pm 1.9\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.1\%$	$\pm 1.1\%$	∞
u10	RF Ambient Conditions	$\pm 3.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	∞
u11	RF Ambient Reflections	$\pm 3.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	∞
u12	Probe Positioner Mechanical Tolerance	$\pm 0.4\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.2\%$	$\pm 0.2\%$	∞
u13	Probe Positioning with respect to Phantom Shell	$\pm 2.9\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	∞
u14	Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	∞
Test sample Related									
u15	Test sample Positioning	$\pm 3.6\%$	Normal	1	1	1	$\pm 3.6\%$	$\pm 3.6\%$	89
u16	Device Holder Uncertainty	$\pm 2.7\%$	Normal	1	1	1	$\pm 2.7\%$	$\pm 2.7\%$	5
u17	Output Power Variation - SAR drift measurement	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9\%$	$\pm 2.9\%$	∞
Phantom and Tissue Parameters									
u18	Phantom Uncertainty (shape and thickness tolerances)	$\pm 4.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3\%$	$\pm 2.3\%$	∞
u19	Liquid Conductivity - deviation from target values	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8\%$	$\pm 1.2\%$	∞
u20	Liquid Conductivity - measurement uncertainty	$\pm 2.5\%$	Normal	1	0.64	0.43	$\pm 1.6\%$	$\pm 1.08\%$	69
u21	Liquid Permittivity - deviation from target values	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	0.6	0.49	$\pm 1.7\%$	$\pm 1.4\%$	∞
u22	Liquid Permittivity - measurement uncertainty	$\pm 2.5\%$	Normal	1	0.6	0.49	$\pm 1.5\%$	$\pm 1.23\%$	69
Combined standard uncertainty				RSS			$\pm 10.88\%$	$\pm 10.66\%$	313
Expanded uncertainty (95% CONFIDENCE LEVEL)				$k=2$			$\pm 21.76\%$	$\pm 21.31\%$	

Table 8. Uncertainty Budget for frequency range 300MHz to 3GHz



Uncertainty of a Measure SAR of EUT with DASY System

Item	Uncertainty Component	Uncertainty Value	Prob. Dist	Div.	c_i (1g)	c_i (10g)	Std. Unc. (1-g)	Std. Unc. (10-g)	v_i or V_{eff}
Measurement System									
u1	Probe Calibration ($k=1$)	$\pm 6.5\%$	Normal	1	1	1	$\pm 6.5\%$	$\pm 6.5\%$	∞
u2	Axial Isotropy	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 1.9\%$	$\pm 1.9\%$	∞
u3	Hemispherical Isotropy	$\pm 9.6\%$	Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 3.9\%$	$\pm 3.9\%$	
u4	Boundary Effect	$\pm 2.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2\%$	$\pm 1.2\%$	∞
u5	Linearity	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.7\%$	$\pm 2.7\%$	∞
u6	System Detection Limit	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	∞
u7	Readout Electronics	$\pm 0.0\%$	Normal	1	1	1	$\pm 0.0\%$	$\pm 0.0\%$	∞
u8	Response Time	$\pm 0.8\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.5\%$	$\pm 0.5\%$	∞
u9	Integration Time	$\pm 2.8\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.8\%$	$\pm 2.8\%$	∞
u10	RF Ambient Conditions	$\pm 3.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	∞
u11	RF Ambient Reflections	$\pm 3.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	∞
u12	Probe Positioner Mechanical Tolerance	$\pm 0.7\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.7\%$	$\pm 0.7\%$	∞
u13	Probe Positioning with respect to Phantom Shell	$\pm 9.9\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 5.7\%$	$\pm 5.7\%$	∞
u14	Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	$\pm 3.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	∞
Test sample Related									
u15	Test sample Positioning	$\pm 3.6\%$	Normal	1	1	1	$\pm 3.6\%$	$\pm 3.6\%$	89
u16	Device Holder Uncertainty	$\pm 2.7\%$	Normal	1	1	1	$\pm 2.7\%$	$\pm 2.7\%$	5
u17	Output Power Variation - SAR drift measurement	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9\%$	$\pm 2.9\%$	∞
Phantom and Tissue Parameters									
u18	Phantom Uncertainty (shape and thickness tolerances)	$\pm 4.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3\%$	$\pm 2.3\%$	∞
u19	Liquid Conductivity - deviation from target values	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8\%$	$\pm 1.2\%$	∞
u20	Liquid Conductivity - measurement uncertainty	$\pm 2.5\%$	Normal	1	0.64	0.43	$\pm 1.6\%$	$\pm 1.08\%$	69
u21	Liquid Permittivity - deviation from target values	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	0.6	0.49	$\pm 1.7\%$	$\pm 1.4\%$	∞
u22	Liquid Permittivity - measurement uncertainty	$\pm 2.5\%$	Normal	1	0.6	0.49	$\pm 1.5\%$	$\pm 1.23\%$	69
Combined standard uncertainty				RSS			$\pm 12.84\%$	$\pm 12.65\%$	313
Expanded uncertainty (95% CONFIDENCE LEVEL)				$k=2$			$\pm 25.68\%$	$\pm 25.29\%$	

Table 9. Uncertainty Budget for frequency range 3GHz to 6GHz



10. Measurement Procedure

The measurement procedures are as follows:

1. For WLAN function, engineering testing software installed on Notebook can provide continuous transmitting signal.
2. Measure output power through RF cable and power meter
3. Set scan area, grid size and other setting on the DASY software
4. Find out the largest SAR result on these testing positions of each band
5. Measure SAR results for other channels in worst SAR testing position if the SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

1. Power reference measurement
2. Area scan
3. Zoom scan
4. Power drift measurement

10.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages

1. Extraction of the measured data (grid and values) from the Zoom Scan
2. Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
3. Generation of a high-resolution mesh within the measured volume
4. Interpolation of all measured values from the measurement grid to the high-resolution grid
5. Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
6. Calculation of the averaged SAR within masses of 1g and 10g



10.2 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures points and step size follow as below. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

Grid Type	Frequency		Step size (mm)			X*Y*Z (Point)	Cube size			Step size		
			X	Y	Z		X	Y	Z	X	Y	Z
uniform grid	$\leq 3\text{GHz}$	$\leq 2\text{GHz}$	≤ 8	≤ 8	≤ 5	$5*5*7$	32	32	30	8	8	5
		2G - 3G	≤ 5	≤ 5	≤ 5	$7*7*7$	30	30	30	5	5	5
	3 - 6GHz	3 - 4GHz	≤ 5	≤ 5	≤ 4	$7*7*8$	30	30	28	5	5	4
		4 - 5GHz	≤ 4	≤ 4	≤ 3	$8*8*10$	28	28	27	4	4	3
		5 - 6GHz	≤ 4	≤ 4	≤ 2	$8*8*12$	28	28	22	4	4	2

(Our measure settings are refer KDB Publication 865664 D01v01r04)

10.3 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the DUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

10.4 SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation. Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

10.5 Power Drift Monitoring

All SAR testing is under the DUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of DUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.



11. SAR Test Results Summary

1. According KDB 447498 D01 V06 section 4.1.4, the “Reported” explanation as below:
“When SAR or MPE is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported.”
2. If actual power less than tune-up power that Scaling SAR is required.
3. The formula of Reported SAR, that represent as below:
$$\text{Reported SAR} = \text{Original SAR} * 10^{[(\text{Tune-up power} - \text{Actual power})/10]}$$
4. When the reported SAR of the highest measured maximum output power channel is $\leq 0.8 \text{ W/kg}$, no further SAR testing is required for IEEE 802.11b DSSS.
5. When the reported SAR of the highest measured maximum output power channel is $> 0.8 \text{ W/kg}$, SAR is required using the next highest measured output power channel for IEEE 802.11b DSSS.
6. When IEEE 802.11b DSSS any reported SAR is $> 1.2 \text{ W/kg}$, SAR is required for the third channel; i.e., all channels require testing.
7. When SAR measurement is required for 2.4 GHz - IEEE 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied. SAR is not required for the following 2.4 GHz OFDM conditions.
 - (a) When KDB Publication 447498 D01 SAR test exclusion applies to the OFDM configuration.
 - (b) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is $\leq 1.2 \text{ W/kg}$.
8. Considering the sum of simultaneous transmission, so the n/ac mode must perform the test.
9. The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the IEEE 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band.
10. SAR is measured using the highest measured maximum output power channel.
11. SAR test reduction for subsequent highest output test channels is determined according to reported SAR of the initial test configuration.
12. When the reported SAR of the initial test configuration is $> 0.8 \text{ W/kg}$, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is $\leq 1.2 \text{ W/kg}$ or all required channels are tested.
13. When SAR test exclusion provisions of KDB Publication 447498 D01 are applicable and SAR measurement is not required for the initial test configuration, SAR is also not required for the next highest maximum output power transmission mode subsequent test configuration(s) in that frequency band or aggregated band and exposure configuration.
14. When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is $\leq 1.2 \text{ W/kg}$, SAR is not required for that subsequent test configuration.
15. When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is $\leq 1.2 \text{ W/kg}$, SAR is not required for U-NII-1 band for that configuration (IEEE 802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.
16. When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is $\leq 1.2 \text{ W/kg}$, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, each band is tested independently for SAR.
17. According to the FCC guidance, two SAR test positions for this device are appropriate with this typical use:
 - (a) 5 mm separation from the flat phantom for the bottom of the device.
 - (b) 10 mm separation from the flat phantom for the end of the device (opposite from the USB connector)
18. The device is designed to WWAN and WLAN can not be transmitted simultaneously, combine SAR is not required.
19. The device operating IEEE 802.11 a/b/g mode is 1TX (Ant-0).
20. We used worst-case configurations to test mimo SAR for 2.4GHz and 5GHz.



11.1 Head Measurement SAR

Evaluated head SAR is not available.

11.2 Body Measurement SAR

WLAN ANT-0 test results											
Index .	Position	Band	Ch.	Data Rate (Mbps)	Test Position	Spacing (mm)	SAR _{1g} (W/kg)	Power Drift	Burst Avg Power	Max tune-up	Reported SAR _{1g} (W/kg)
#1	Flat	IEEE 802.11b	11	1	End side 90 degree	10	0.709	-0.18	21.69	21.9	0.74
#2	Flat	IEEE 802.11b	11	1	Bottom side 90 degree	5	0.036	-0.1	21.69	21.9	0.04
#3	Flat	IEEE 802.11n 2.4GHz 20MHz	6	6.5	End side 90 degree	10	0.719	-0.16	21.01	21.3	0.77
#4	Flat	IEEE 802.11n 2.4GHz 20MHz	6	6.5	Bottom side 90 degree	5	0.07	-0.15	21.01	21.3	0.08
#5	Flat	IEEE 802.11n 2.4GHz 40MHz	6	13.5	End side 90 degree	10	0.251	-0.12	16.47	16.7	0.27
#6	Flat	IEEE 802.11n 2.4GHz 40MHz	6	13.5	Bottom side 90 degree	5	0.037	-0.15	16.47	16.7	0.04
#35	Flat	IEEE 802.11a	52	6	End side 90 degree	10	1.02	0.11	19.26	19.5	1.08
#11	Flat	IEEE 802.11a	56	6	End side 90 degree	10	0.869	-0.09	19.35	19.5	0.90
#12	Flat	IEEE 802.11a	56	6	Bottom side 90 degree	5	0.147	-0.16	19.35	19.5	0.15
#36	Flat	IEEE 802.11a	104	6	End side 90 degree	10	0.605	-0.1	19.18	19.5	0.65
#13	Flat	IEEE 802.11a	132	6	End side 90 degree	10	1.05	0.1	19.19	19.5	1.13
#14	Flat	IEEE 802.11a	132	6	Bottom side 90 degree	5	0.195	0.12	19.19	19.5	0.21
#37	Flat	IEEE 802.11a	161	6	End side 90 degree	10	0.891	-0.03	19.35	19.5	0.92
#15	Flat	IEEE 802.11a	165	6	End side 90 degree	10	1.08	-0.17	19.39	19.5	1.11
#16	Flat	IEEE 802.11a	165	6	Bottom side 90 degree	5	0.216	0	19.39	19.5	0.22



WLAN ANT-0 test results											
Index .	Position	Band	Ch.	Data Rate (Mbps)	Test Position	Spacing (mm)	SAR _{1g} (W/kg)	Power Drift	Burst Avg Power	Max tune-up	Reported SAR _{1g} (W/kg)
#17	Flat	IEEE 802.11ac 20MHz	52	6.5	End side 90 degree	10	0.61	0.13	19.34	19.5	0.63
#18	Flat	IEEE 802.11ac 20MHz	52	6.5	Bottom side 90 degree	5	0.15	-0.17	19.34	19.5	0.16
#19	Flat	IEEE 802.11ac 20MHz	116	6.5	End side 90 degree	10	0.635	0	19.16	19.5	0.69
#20	Flat	IEEE 802.11ac 20MHz	116	6.5	Bottom side 90 degree	5	0.185	0.19	19.16	19.5	0.20
#21	Flat	IEEE 802.11ac 20MHz	157	6.5	End side 90 degree	10	0.663	-0.01	18.23	18.5	0.71
#22	Flat	IEEE 802.11ac 20MHz	157	6.5	Bottom side 90 degree	5	0.196	0.1	18.23	18.5	0.21
#23	Flat	IEEE 802.11ac 40MHz	38	13.5	End side 90 degree	10	0.695	-0.12	19.26	19.5	0.73
#24	Flat	IEEE 802.11ac 40MHz	38	13.5	Bottom side 90 degree	5	0.202	-0.17	19.26	19.5	0.21
#25	Flat	IEEE 802.11ac 40MHz	118	13.5	End side 90 degree	10	0.514	0.08	17.42	17.5	0.52
#26	Flat	IEEE 802.11ac 40MHz	118	13.5	Bottom side 90 degree	5	0.179	0.05	17.42	17.5	0.18
#27	Flat	IEEE 802.11ac 40MHz	151	13.5	End side 90 degree	10	0.514	-0.11	16.83	17	0.54
#28	Flat	IEEE 802.11ac 40MHz	151	13.5	Bottom side 90 degree	5	0.176	-0.11	16.83	17	0.18
#29	Flat	IEEE 802.11ac 80MHz	42	29.3	End side 90 degree	10	0.472	-0.12	14.93	15	0.48
#30	Flat	IEEE 802.11ac 80MHz	42	29.3	Bottom side 90 degree	5	0.143	0.12	14.93	15	0.15
#31	Flat	IEEE 802.11ac 80MHz	122	29.3	End side 90 degree	10	0.489	0.16	17.53	18	0.55
#32	Flat	IEEE 802.11ac 80MHz	122	29.3	Bottom side 90 degree	5	0.193	-0.13	17.53	18	0.22
#33	Flat	IEEE 802.11ac 80MHz	155	29.3	End side 90 degree	10	0.596	0.12	17.04	17.5	0.66
#34	Flat	IEEE 802.11ac 80MHz	155	29.3	Bottom side 90 degree	5	0.207	-0.19	17.04	17.5	0.23



WLAN ANT-1 test results											
Index .	Position	Band	Ch.	Data Rate (Mbps)	Test Position	Spacing (mm)	SAR _{1g} (W/kg)	Power Drift	Burst Avg Power	Max tune-up	Reported SAR _{1g} (W/kg)
#7	Flat	IEEE 802.11n 2.4GHz 20MHz	6	6.5	End side 90 degree	10	0.622	-0.16	20.63	20.9	0.66
#8	Flat	IEEE 802.11n 2.4GHz 20MHz	6	6.5	Bottom side 90 degree	5	0.066	-0.17	20.63	20.9	0.07
#9	Flat	IEEE 802.11n 2.4GHz 40MHz	6	13.5	End side 90 degree	10	0.021	0.16	16.33	16.6	0.02
#10	Flat	IEEE 802.11n 2.4GHz 40MHz	6	13.5	Bottom side 90 degree	5	0.0205	0.14	16.33	16.6	0.02
#35	Flat	IEEE 802.11ac 20MHz	52	6.5	End side 90 degree	10	0.689	0.15	19.38	19.5	0.71
#36	Flat	IEEE 802.11ac 20MHz	52	6.5	Bottom side 90 degree	5	0.149	0.15	19.38	19.5	0.15
#37	Flat	IEEE 802.11ac 20MHz	112	6.5	End side 90 degree	10	0.595	0.03	18.63	19	0.65
#38	Flat	IEEE 802.11ac 20MHz	112	6.5	Bottom side 90 degree	5	0.195	-0.19	18.63	19	0.21
#39	Flat	IEEE 802.11ac 20MHz	149	6.5	End side 90 degree	10	0.594	-0.16	17.33	17.5	0.62
#40	Flat	IEEE 802.11ac 20MHz	149	6.5	Bottom side 90 degree	5	0.177	-0.18	17.33	17.5	0.18
#41	Flat	IEEE 802.11ac 40MHz	54	13.5	End side 90 degree	10	0.654	-0.19	19.13	19.5	0.71
#42	Flat	IEEE 802.11ac 40MHz	54	13.5	Bottom side 90 degree	5	0.148	0.14	19.13	19.5	0.16
#43	Flat	IEEE 802.11ac 40MHz	102	13.5	End side 90 degree	10	0.514	-0.17	17.88	18	0.53
#44	Flat	IEEE 802.11ac 40MHz	102	13.5	Bottom side 90 degree	5	0.179	-0.18	17.88	18	0.18
#45	Flat	IEEE 802.11ac 40MHz	151	13.5	End side 90 degree	10	0.495	0.09	16.77	17	0.52
#46	Flat	IEEE 802.11ac 40MHz	151	13.5	Bottom side 90 degree	5	0.189	-0.16	16.77	17	0.20
#47	Flat	IEEE 802.11ac 80MHz	42	29.3	End side 90 degree	10	0.378	0.03	14.57	15	0.42
#48	Flat	IEEE 802.11ac 80MHz	42	29.3	Bottom side 90 degree	5	0.162	-0.16	14.57	15	0.18
#49	Flat	IEEE 802.11ac 80MHz	122	29.3	End side 90 degree	10	0.691	-0.17	17.3	17.5	0.72
#50	Flat	IEEE 802.11ac 80MHz	122	29.3	Bottom side 90 degree	5	0.229	0.14	17.3	17.5	0.24
#51	Flat	IEEE 802.11ac 80MHz	155	29.3	End side 90 degree	10	0.544	-0.11	16.47	16.5	0.55
#52	Flat	IEEE 802.11ac 80MHz	155	29.3	Bottom side 90 degree	5	0.137	-0.08	16.47	16.5	0.14



WLAN MIMO ANT-0+1 test results											
Index .	Position	Band	Ch.	Data Rate (Mbps)	Test Position	Spacing (mm)	SAR _{1g} (W/kg)	Power Drift	Burst Avg Power	Max tune-up	Reported SAR _{1g} (W/kg)
#55	Flat	IEEE 802.11n 2.4GHz 20MHz	6	13	End side 90 degree	10	0.839	0.03	23.83	24.1	0.89
#54	Flat	IEEE 802.11ac 80MHz	155	58.6	End side 90 degree	10	0.499	0.14	19.77	19.8	0.50

11.3 Hot-spot mode Measurement SAR

This devise is not support Hot-spot function.

11.4 Extremity Measurement SAR

Evaluated extremity SAR is not available.



11.5 SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required.

- 1.The original highest measured Reported SAR_{1g} is ≥ 0.80 W/kg, repeat that measurement once.
- 2.Perform a second repeated measurement the ratio of largest to smallest SAR for the original and first repeated measurements is < 1.2 ,the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 3.Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Original Index	Phantom Position	Operate Band	Ch.	Side to Phantom	Original SAR _{1g} (W/Kg)	First SAR _{1g} (W/Kg)	First Ratio	Second SAR _{1g} (W/Kg)	Second Ratio	Third SAR _{1g} (W/Kg)	Third Ratio
#53	Flat	IEEE 802.11a	165	End side 90 degree	1.08	1.14	1.06	---	---	---	---

- Note:
1. According KDB 447498 D01 V06 section 4.1.4, the “Reported” explanation as below:
“When SAR or MPE is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported.”
 2. If actual power less than tune-up power that Scaling SAR is required.
 3. The formula of Reported SAR, that represent as below:
$$\text{Reported SAR} = \text{Original SAR} * 10^{[(\text{Tune-up power} - \text{Actual power})/10]}$$
 4. The original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
 5. Perform a second repeated measurement the ratio of largest to smallest SAR for the original and first repeated measurements is < 1.2 ,the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).



11.6 Std. C95.1-1992 RF Exposure Limit

Human Exposure	Population Uncontrolled Exposure (W/kg) or (mW/g)	Occupational Controlled Exposure (W/kg) or (mW/g)
Spatial Peak SAR* (head)	1.60	8.00
Spatial Peak SAR** (Whole Body)	0.08	0.40
Spatial Peak SAR*** (Partial-Body)	1.60	8.00
Spatial Peak SAR**** (Hands / Feet / Ankle / Wrist)	4.00	20.00

Table 10. Safety Limits for Partial Body Exposure

Notes :

- * The Spatial Peak value of the SAR averaged over any 1 gram of tissue.
(defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- ** The Spatial Average value of the SAR averaged over the whole – body.
- *** The Spatial Average value of the SAR averaged over the partial – body.
- **** The Spatial Peak value of the SAR averaged over any 10 grams of tissue.
(defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Population / Uncontrolled Environments : are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Occupational / Controlled Environments : are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).



12. References

- [1] Std. C95.1-1999, "American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300KHz to 100GHz", New York.
- [2] NCRP, National Council on Radiation Protection and Measurements, "Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields", NCRP report NO. 86, 1986.
- [3] T. Schmid, O. Egger, and N. Kuster, "Automatic E-field scanning system for dosimetric assessments", IEEE Transactions on Microwave Theory and Techniques, vol. 44, pp. 105-113, Jan. 1996.
- [4] K. Poković, T. Schmid, and N. Kuster, "Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequency", in ICECOM'97, Dubrovnik, October 15-17, 1997, pp.120-124.
- [5] K. Poković, T. Schmid, and N. Kuster, "E-field probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23-25 June, 1996, pp.172-175.
- [6] N. Kuster, and Q. Balzano, "Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz", IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [7] Robert J. Renka, "Multivariate Interpolation Of Large Sets Of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988 , pp. 139-148.
- [8] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [9] Std. C95.3-1991, "IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave, New York: IEEE, Aug. 1992.
- [10] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10KHz-300GHz, Jan. 1995.
- [11] IEEE Std 1528™-2013 - IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head From Wireless Communications Devices: Measurement Techniques

Appendix A - System Performance Check

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/21/2016 3:24:15 PM

System Performance Check at 2450MHz_20161121_Body

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:712

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.964 \text{ S/m}$; $\epsilon_r = 52.402$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.3, 7.3, 7.3); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

System Performance Check at 2450MHz/Area Scan (61x61x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 19.6 W/kg

System Performance Check at 2450MHz/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 103.5 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 25.6 W/kg

SAR(1 g) = 13 W/kg; SAR(10 g) = 6.01 W/kg

Maximum value of SAR (measured) = 19.7 W/kg

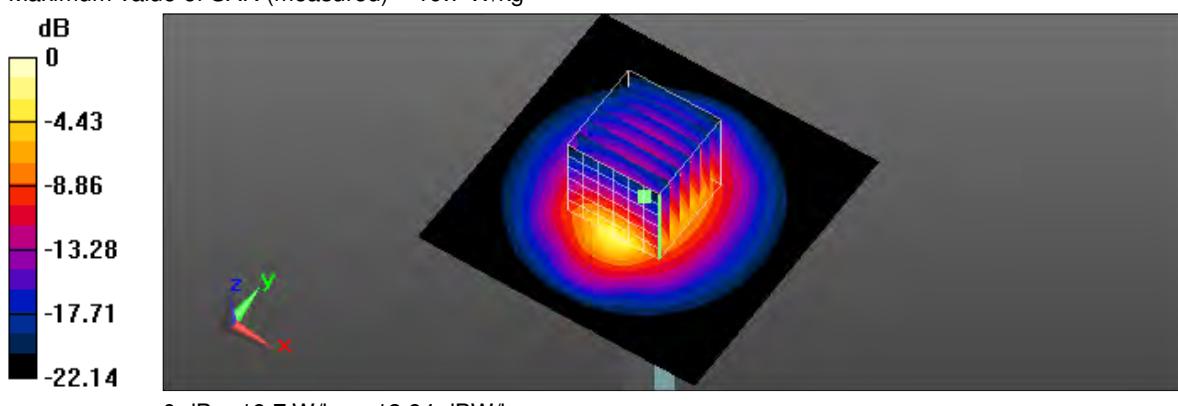

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/22/2016 3:56:52 PM

System Performance Check at 2450MHz_20161122_Body

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:712

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.964 \text{ S/m}$; $\epsilon_r = 52.402$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.3, 7.3, 7.3); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

System Performance Check at 2450MHz/Area Scan (61x61x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 19.4 W/kg

System Performance Check at 2450MHz/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 103.3 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 25.3 W/kg

SAR(1 g) = 13 W/kg; SAR(10 g) = 6.06 W/kg

Maximum value of SAR (measured) = 19.5 W/kg

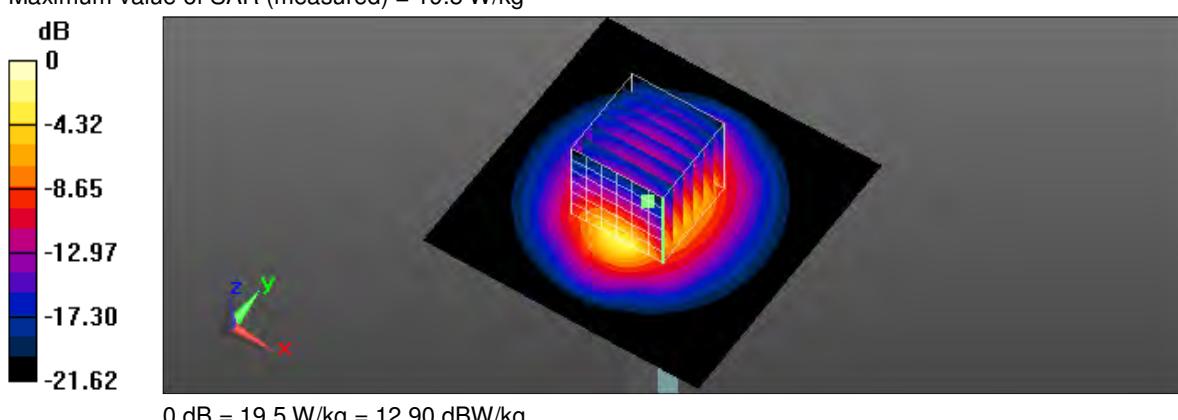

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 12/13/2016 9:06:53 PM

System Performance Check at 2450MHz_20161213_Body

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:712

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.964 \text{ S/m}$; $\epsilon_r = 52.402$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.3, 7.3, 7.3); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

System Performance Check at 2450MHz/Area Scan (61x61x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 20.6 W/kg

System Performance Check at 2450MHz/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 105.5 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 27.2 W/kg

SAR(1 g) = 13.5 W/kg; SAR(10 g) = 6.15 W/kg

Maximum value of SAR (measured) = 20.6 W/kg

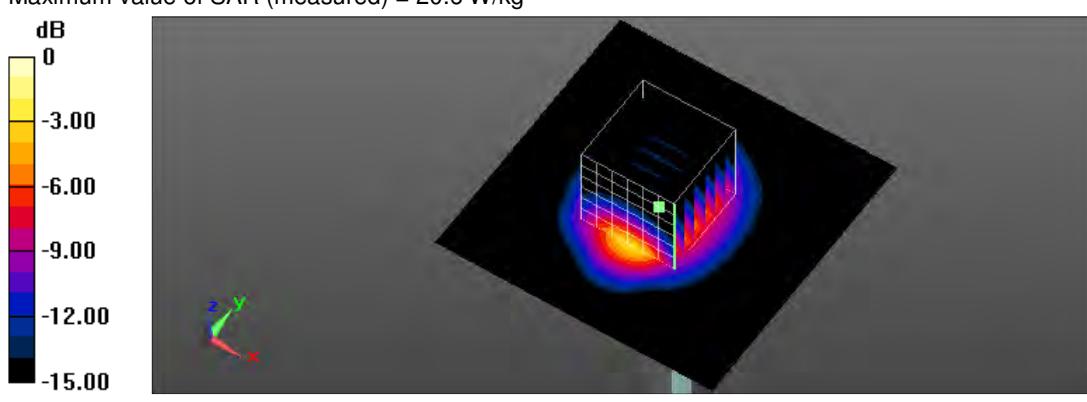

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/2/2016 6:41:46 PM

System Performance Check at 5200MHz_20161102_Body

DUT: Dipole 5GHzV2; Type: D5GHz; Serial: 1021

Communication System: UID 0, CW (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 5.245 \text{ S/m}$; $\epsilon_r = 48.766$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

System Performance Check at 5200MHz/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 14.6 W/kg

System Performance Check at 5200MHz/Zoom Scan (8x8x7)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 56.26 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 31.4 W/kg

SAR(1 g) = 7.41 W/kg; SAR(10 g) = 2.06 W/kg

Maximum value of SAR (measured) = 14.4 W/kg

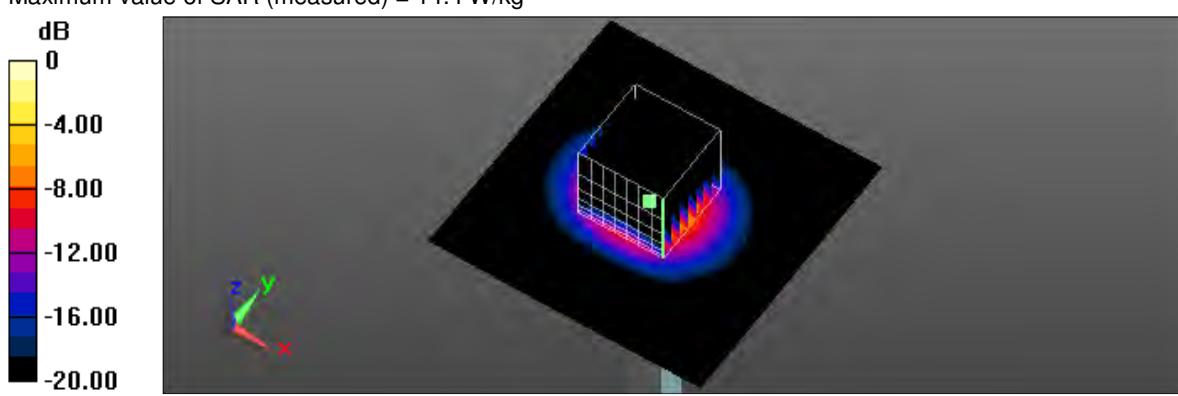

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/3/2016 9:08:02 PM

System Performance Check at 5200MHz_20161103_Body

DUT: Dipole 5GHzV2; Type: D5GHz; Serial: 1021

Communication System: UID 0, CW (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 5.245 \text{ S/m}$; $\epsilon_r = 48.766$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

System Performance Check at 5200MHz/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 15.9 W/kg

System Performance Check at 5200MHz/Zoom Scan (8x8x7)/Cube 0:


Measurement grid: $dx=4 \text{ mm}$, $dy=4 \text{ mm}$, $dz=1.4 \text{ mm}$

Reference Value = 57.24 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 34.3 W/kg

SAR(1 g) = 7.92 W/kg; SAR(10 g) = 2.2 W/kg

Maximum value of SAR (measured) = 15.5 W/kg

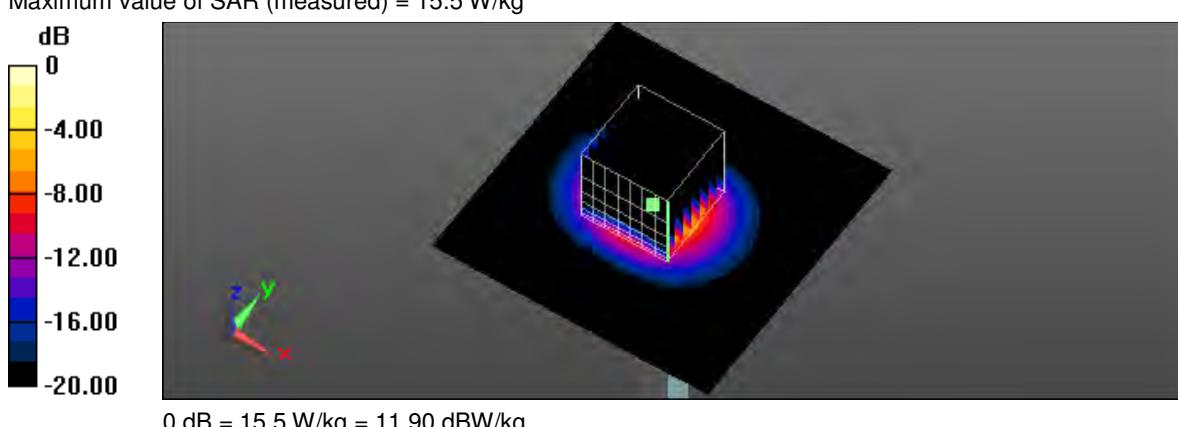

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/7/2016 9:37:26 AM

System Performance Check at 5200MHz_20161107_Body

DUT: Dipole 5GHzV2; Type: D5GHz; Serial: 1021

Communication System: UID 0, CW (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 5.245 \text{ S/m}$; $\epsilon_r = 48.766$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

System Performance Check at 5200MHz/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 14.6 W/kg

System Performance Check at 5200MHz/Zoom Scan (8x8x7)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 57.55 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 30.4 W/kg

SAR(1 g) = 7.67 W/kg; SAR(10 g) = 2.16 W/kg

Maximum value of SAR (measured) = 15.3 W/kg

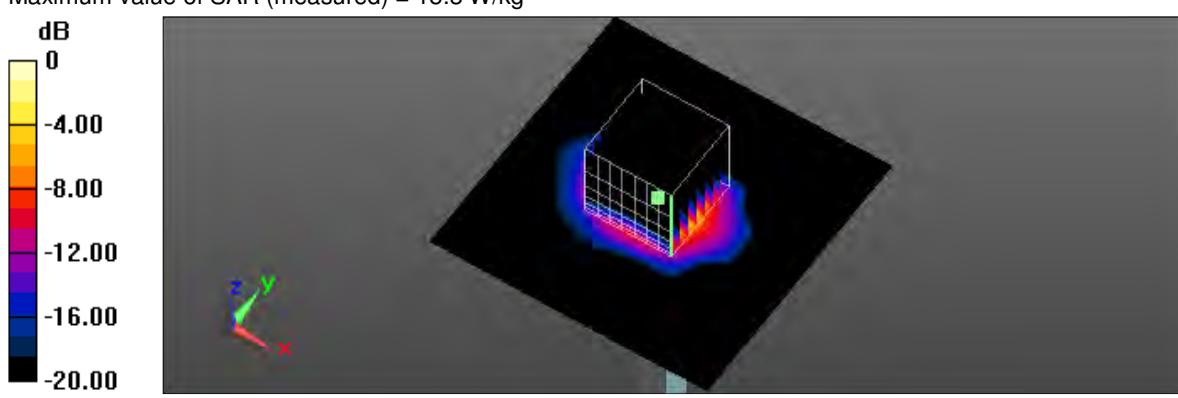

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/8/2016 9:38:50 AM

System Performance Check at 5200MHz_20161108_Body

DUT: Dipole 5GHzV2; Type: D5GHz; Serial: 1021

Communication System: UID 0, CW (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 5.245 \text{ S/m}$; $\epsilon_r = 48.766$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

System Performance Check at 5200MHz/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 15.4 W/kg

System Performance Check at 5200MHz/Zoom Scan (8x8x7)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 57.25 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 33.8 W/kg

SAR(1 g) = 7.89 W/kg; SAR(10 g) = 2.18 W/kg

Maximum value of SAR (measured) = 15.3 W/kg

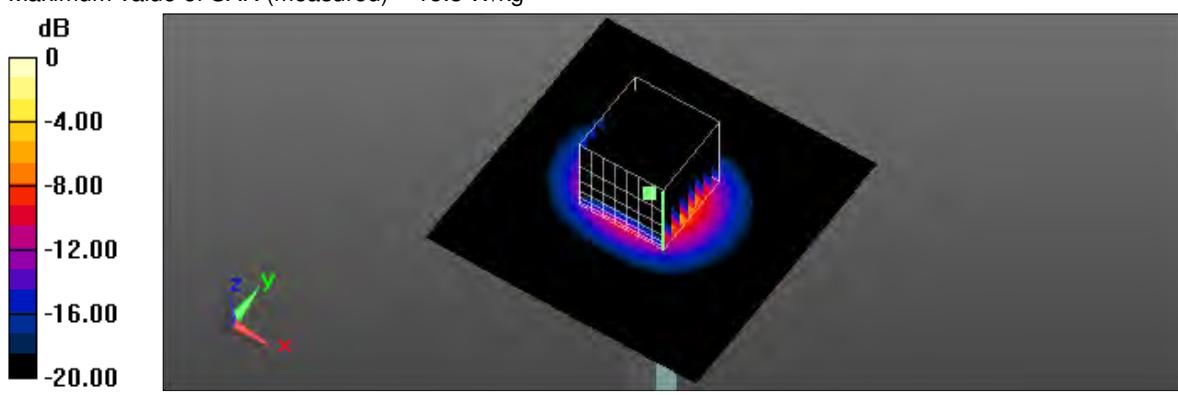

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/9/2016 9:18:37 AM

System Performance Check at 5200MHz_20161109_Body

DUT: Dipole 5GHzV2; Type: D5GHz; Serial: 1021

Communication System: UID 0, CW (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 5.245 \text{ S/m}$; $\epsilon_r = 48.766$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

System Performance Check at 5200MHz/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 15.4 W/kg

System Performance Check at 5200MHz/Zoom Scan (8x8x7)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 57.24 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 33.8 W/kg

SAR(1 g) = 7.87 W/kg; SAR(10 g) = 2.18 W/kg

Maximum value of SAR (measured) = 15.6 W/kg

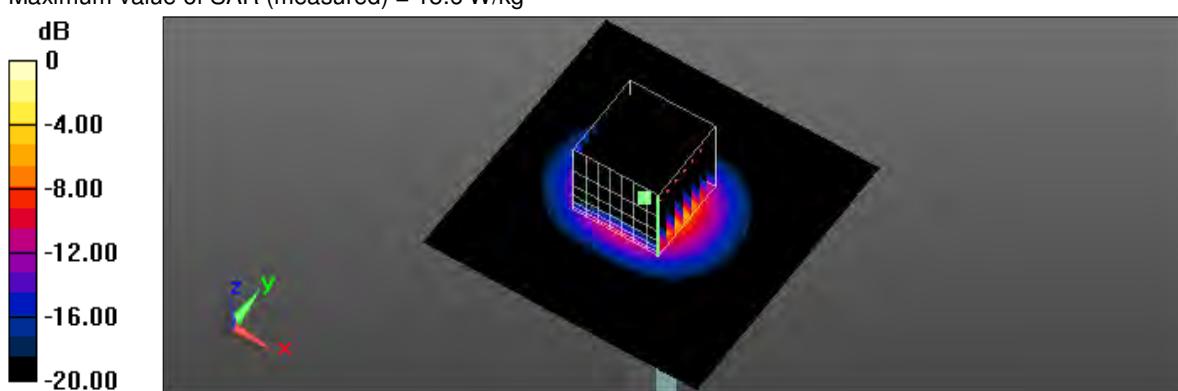

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/2/2016 7:31:42 PM

System Performance Check at 5500MHz_20161102_Body

DUT: Dipole 5GHzV2; Type: D5GHz; Serial: 1021

Communication System: UID 0, CW (0); Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5500 \text{ MHz}$; $\sigma = 5.683 \text{ S/m}$; $\epsilon_r = 48.069$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.31, 4.31, 4.31); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

System Performance Check at 5500MHz/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 16.6 W/kg

System Performance Check at 5500MHz/Zoom Scan (8x8x7)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 58.39 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 36.5 W/kg

SAR(1 g) = 8.26 W/kg; SAR(10 g) = 2.28 W/kg

Maximum value of SAR (measured) = 16.7 W/kg

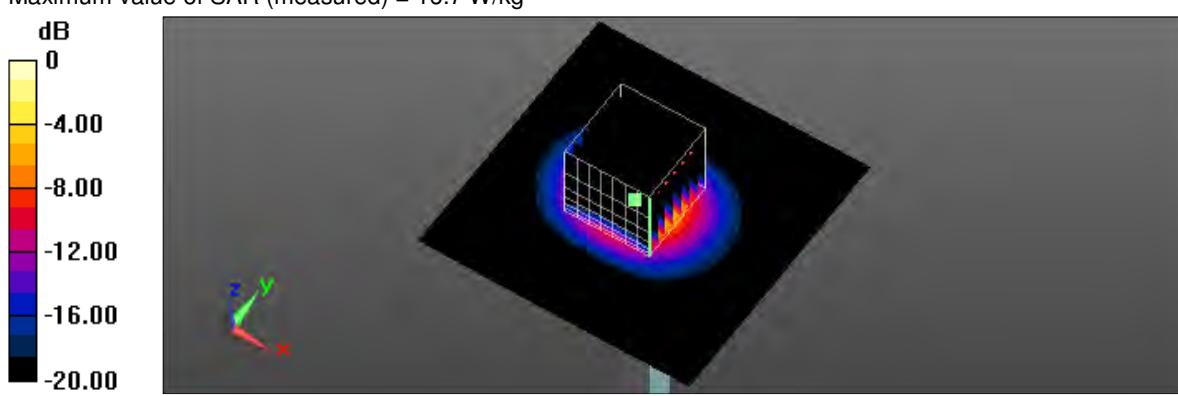

0 dB = 16.7 W/kg = 12.23 dBW/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/3/2016 9:56:51 PM

System Performance Check at 5500MHz_20161103_Body

DUT: Dipole 5GHzV2; Type: D5GHz; Serial: 1021

Communication System: UID 0, CW (0); Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5500 \text{ MHz}$; $\sigma = 5.683 \text{ S/m}$; $\epsilon_r = 48.069$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.31, 4.31, 4.31); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

System Performance Check at 5500MHz/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 17.7 W/kg

System Performance Check at 5500MHz/Zoom Scan (8x8x7)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 58.63 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 39.6 W/kg

SAR(1 g) = 8.61 W/kg; SAR(10 g) = 2.37 W/kg

Maximum value of SAR (measured) = 17.1 W/kg

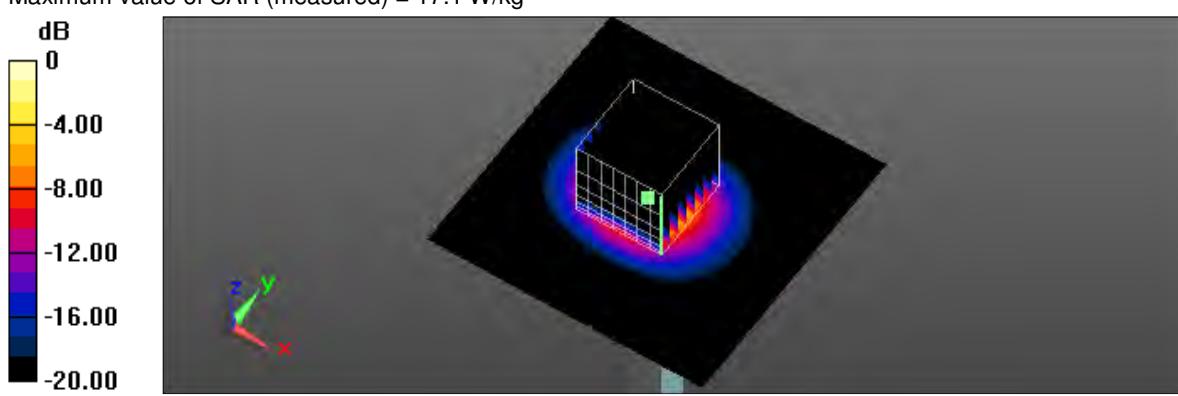

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/7/2016 10:04:15 AM

System Performance Check at 5500MHz_20161107_Body

DUT: Dipole 5GHzV2; Type: D5GHz; Serial: 1021

Communication System: UID 0, CW (0); Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5500 \text{ MHz}$; $\sigma = 5.683 \text{ S/m}$; $\epsilon_r = 48.069$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.31, 4.31, 4.31); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

System Performance Check at 5500MHz/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 16.0 W/kg

System Performance Check at 5500MHz/Zoom Scan (8x8x7)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 58.64 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 33.7 W/kg

SAR(1 g) = 8.04 W/kg; SAR(10 g) = 2.25 W/kg

Maximum value of SAR (measured) = 16.1 W/kg

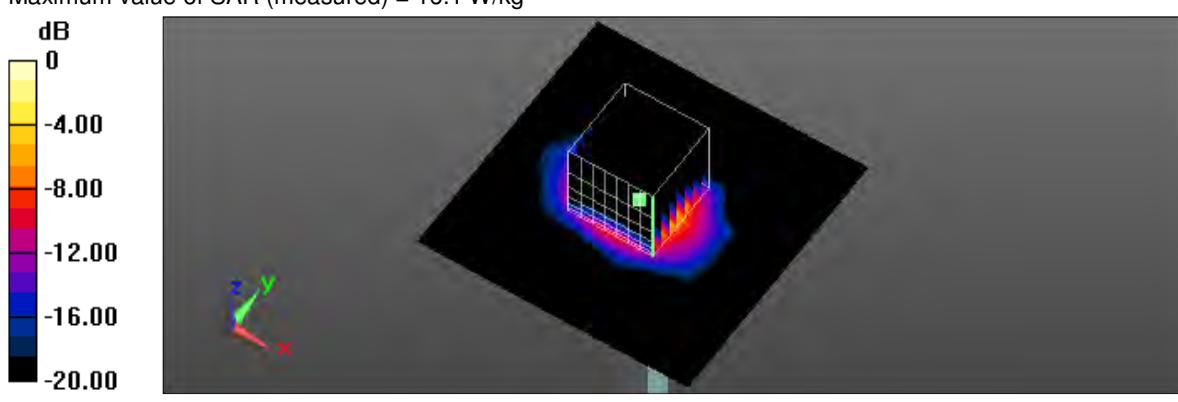

0 dB = 16.1 W/kg = 12.07 dBW/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/8/2016 10:05:26 AM

System Performance Check at 5500MHz_20161108_Body

DUT: Dipole 5GHzV2; Type: D5GHz; Serial: 1021

Communication System: UID 0, CW (0); Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5500 \text{ MHz}$; $\sigma = 5.683 \text{ S/m}$; $\epsilon_r = 48.069$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.31, 4.31, 4.31); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

System Performance Check at 5500MHz/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 16.5 W/kg

System Performance Check at 5500MHz/Zoom Scan (8x8x7)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 58.28 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 38.0 W/kg

SAR(1 g) = 8.39 W/kg; SAR(10 g) = 2.31 W/kg

Maximum value of SAR (measured) = 16.5 W/kg

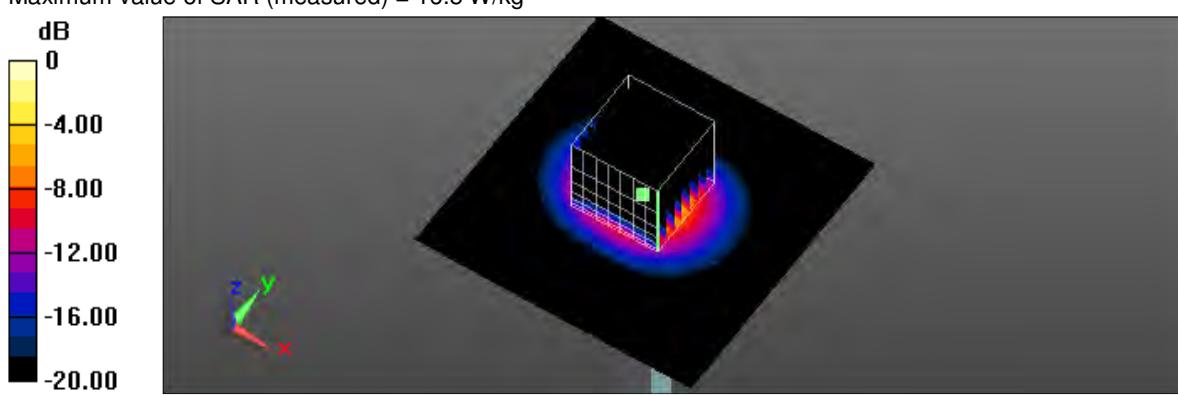

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/9/2016 9:48:14 AM

System Performance Check at 5500MHz_20161109_Body

DUT: Dipole 5GHzV2; Type: D5GHz; Serial: 1021

Communication System: UID 0, CW (0); Frequency: 5500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5500 \text{ MHz}$; $\sigma = 5.683 \text{ S/m}$; $\epsilon_r = 48.069$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.31, 4.31, 4.31); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

System Performance Check at 5500MHz/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 17.1 W/kg

System Performance Check at 5500MHz/Zoom Scan (8x8x7)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 58.95 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 38.6 W/kg

SAR(1 g) = 8.53 W/kg; SAR(10 g) = 2.35 W/kg

Maximum value of SAR (measured) = 17.2 W/kg

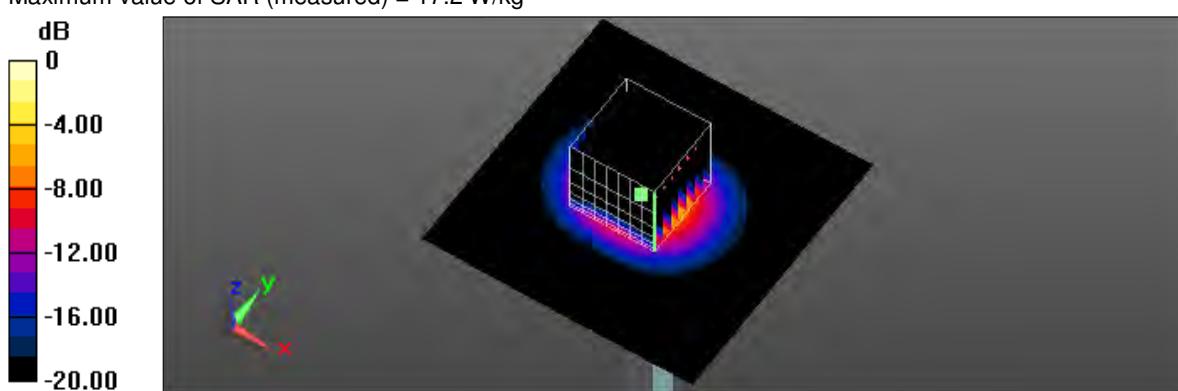

0 dB = 17.2 W/kg = 12.36 dBW/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/2/2016 7:57:08 PM

System Performance Check at 5800MHz_20161102_Body

DUT: Dipole 5GHzV2; Type: D5GHz; Serial: 1021

Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5800 \text{ MHz}$; $\sigma = 6.131 \text{ S/m}$; $\epsilon_r = 47.276$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

System Performance Check at 5800MHz/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 15.7 W/kg

System Performance Check at 5800MHz/Zoom Scan (8x8x7)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 54.27 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 36.1 W/kg

SAR(1 g) = 7.68 W/kg; SAR(10 g) = 2.1 W/kg

Maximum value of SAR (measured) = 15.6 W/kg

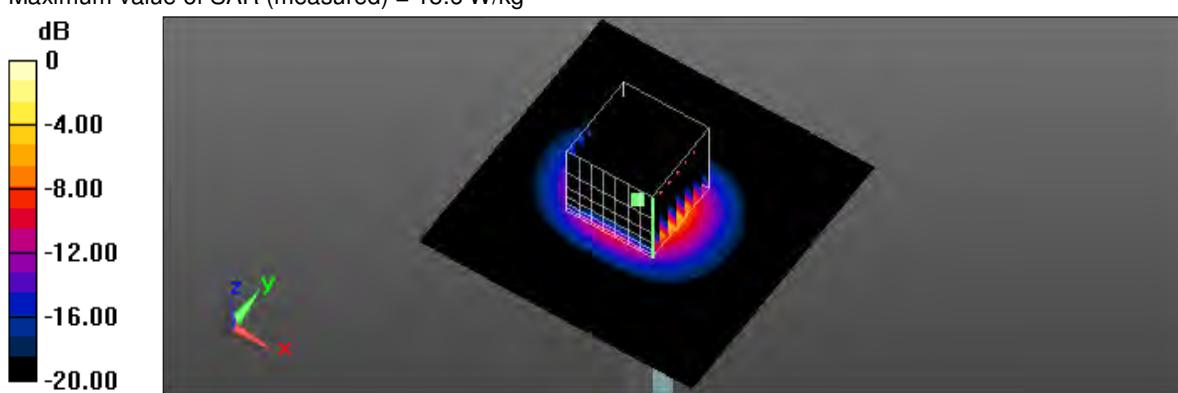

0 dB = 15.6 W/kg = 11.93 dBW/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/3/2016 10:23:50 PM

System Performance Check at 5800MHz_20161103_Body

DUT: Dipole 5GHzV2; Type: D5GHz; Serial: 1021

Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5800 \text{ MHz}$; $\sigma = 6.131 \text{ S/m}$; $\epsilon_r = 47.276$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

System Performance Check at 5800MHz/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 16.5 W/kg

System Performance Check at 5800MHz/Zoom Scan (8x8x7)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 54.59 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 38.7 W/kg

SAR(1 g) = 7.99 W/kg; SAR(10 g) = 2.18 W/kg

Maximum value of SAR (measured) = 15.9 W/kg

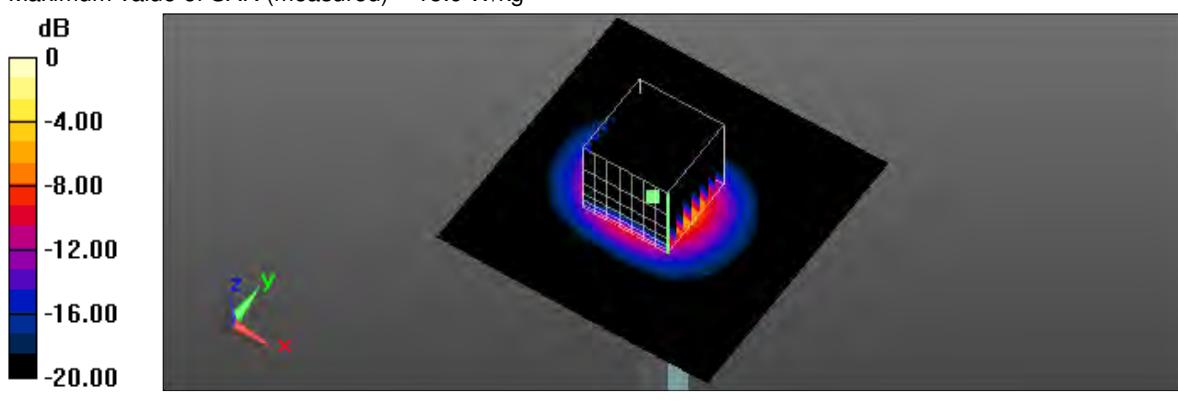

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/7/2016 10:30:13 AM

System Performance Check at 5800MHz_20161107_Body

DUT: Dipole 5GHzV2; Type: D5GHz; Serial: 1021

Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5800 \text{ MHz}$; $\sigma = 6.131 \text{ S/m}$; $\epsilon_r = 47.276$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

System Performance Check at 5800MHz/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 15.7 W/kg

System Performance Check at 5800MHz/Zoom Scan (8x8x7)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 55.12 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 34.6 W/kg

SAR(1 g) = 7.72 W/kg; SAR(10 g) = 2.14 W/kg

Maximum value of SAR (measured) = 15.8 W/kg

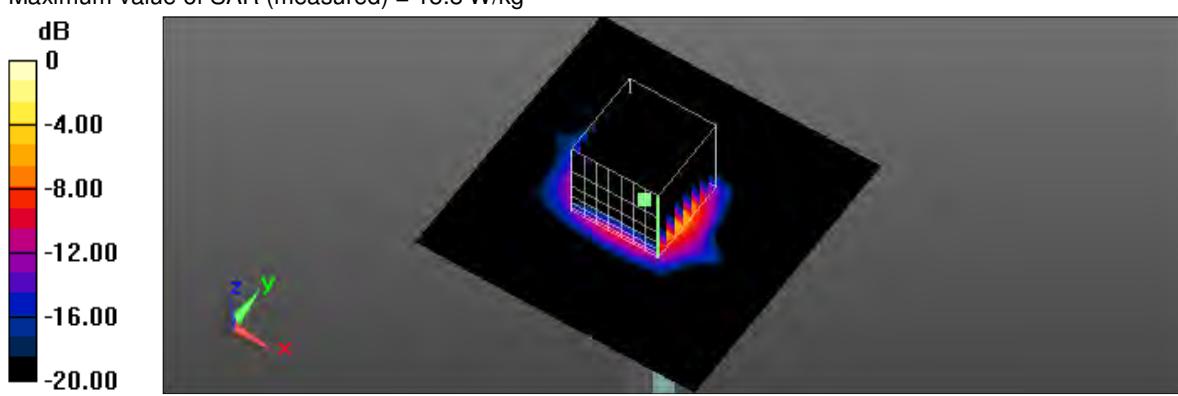

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/8/2016 10:31:15 AM

System Performance Check at 5800MHz_20161108_Body

DUT: Dipole 5GHzV2; Type: D5GHz; Serial: 1021

Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5800 \text{ MHz}$; $\sigma = 6.131 \text{ S/m}$; $\epsilon_r = 47.276$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

System Performance Check at 5800MHz/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 15.7 W/kg

System Performance Check at 5800MHz/Zoom Scan (8x8x7)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 54.51 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 37.9 W/kg

SAR(1 g) = 7.95 W/kg; SAR(10 g) = 2.17 W/kg

Maximum value of SAR (measured) = 15.9 W/kg

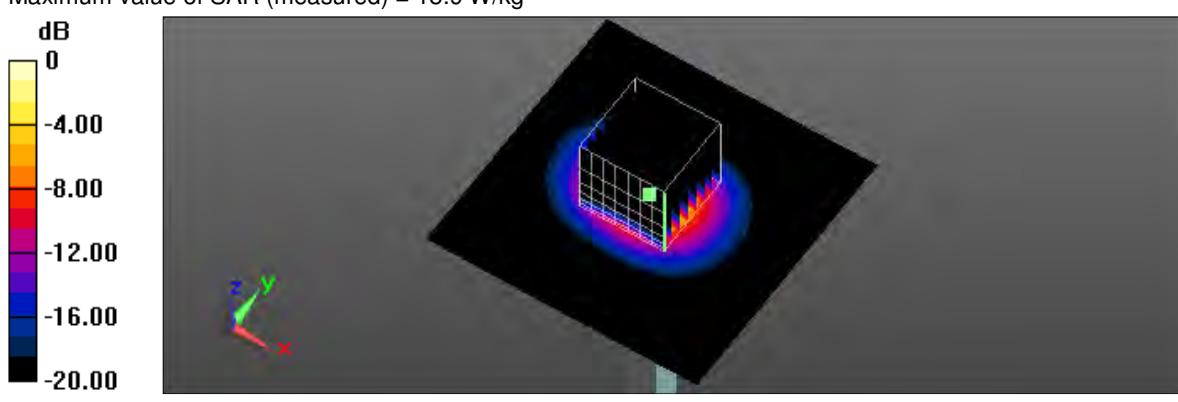

0 dB = 15.9 W/kg = 12.01 dBW/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/9/2016 10:12:34 AM

System Performance Check at 5800MHz_20161109_Body

DUT: Dipole 5GHzV2; Type: D5GHz; Serial: 1021

Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5800 \text{ MHz}$; $\sigma = 6.131 \text{ S/m}$; $\epsilon_r = 47.276$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

System Performance Check at 5800MHz/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 16.5 W/kg

System Performance Check at 5800MHz/Zoom Scan (8x8x7)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 55.12 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 38.4 W/kg

SAR(1 g) = 8.04 W/kg; SAR(10 g) = 2.21 W/kg

Maximum value of SAR (measured) = 16.4 W/kg

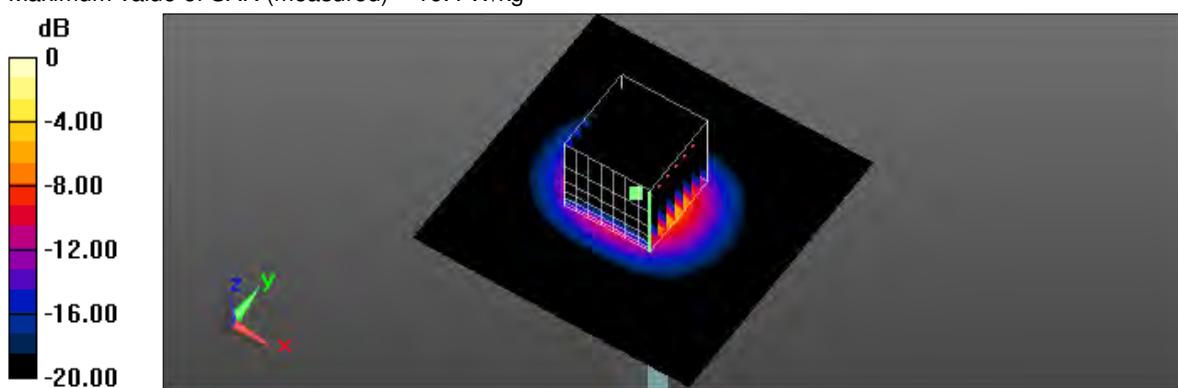

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 12/14/2016 12:07:42 AM

System Performance Check at 5800MHz_20161214_Body

DUT: Dipole 5GHzV2; Type: D5GHz; Serial: 1021

Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5800 \text{ MHz}$; $\sigma = 6.131 \text{ S/m}$; $\epsilon_r = 47.276$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

System Performance Check at 5800MHz/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 16.2 W/kg

System Performance Check at 5800MHz/Zoom Scan (8x8x7)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 51.93 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 36.0 W/kg

SAR(1 g) = 7.99 W/kg; SAR(10 g) = 2.22 W/kg

Maximum value of SAR (measured) = 15.9 W/kg

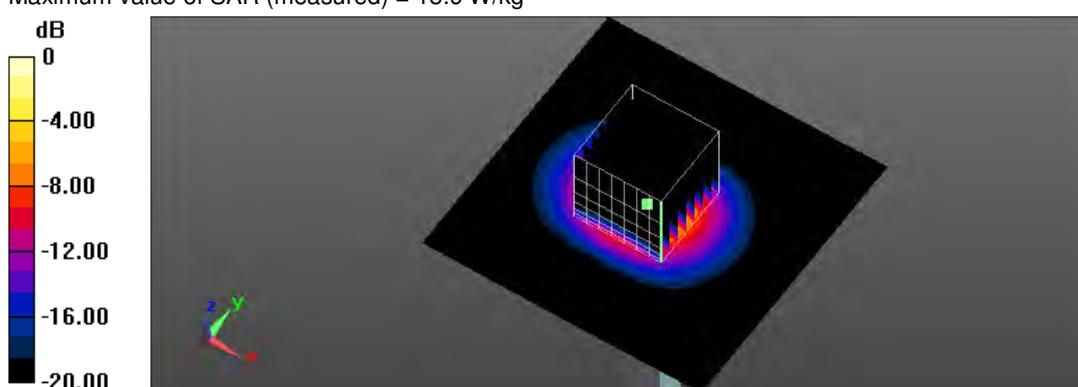

0 dB = 15.9 W/kg = 12.01 dBW/kg

Appendix B - SAR Measurement Data

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/21/2016 4:28:17 PM

1_IEEE 802.11b CH11_1M_End_90 degree_10mm_Antenna 0

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11b (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.981 \text{ S/m}$; $\epsilon_r = 52.329$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.3, 7.3, 7.3); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x191x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 1.09 W/kg

Flat/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.03 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.709 W/kg; SAR(10 g) = 0.385 W/kg

Maximum value of SAR (measured) = 0.995 W/kg

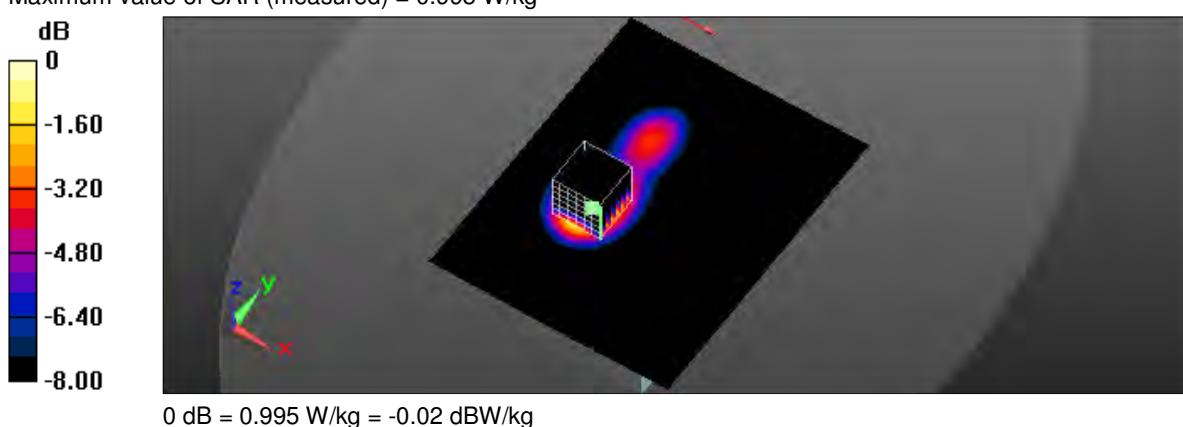

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/23/2016 12:14:16 AM

2_IEEE 802.11b CH11_1M_Bottom_90 degree_5mm_Antenna 0

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11b (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.981 \text{ S/m}$; $\epsilon_r = 52.329$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.3, 7.3, 7.3); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x121x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.226 W/kg

Flat/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.203 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.0550 W/kg

SAR(1 g) = 0.036 W/kg; SAR(10 g) = 0.026 W/kg

Maximum value of SAR (measured) = 0.0450 W/kg

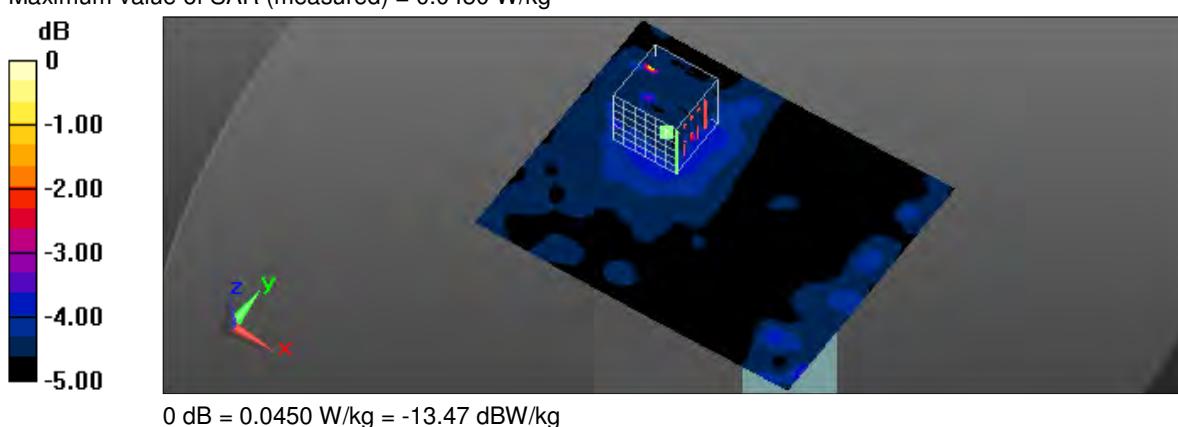

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/21/2016 5:10:21 PM

3_IEEE 802.11n 2.4GHz 20MHz CH6_6.5M_End_90 degree_10mm_Antenna 0

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11n(2.4GHz) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.953 \text{ S/m}$; $\epsilon_r = 52.484$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.3, 7.3, 7.3); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x191x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 1.18 W/kg

Flat/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.521 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.719 W/kg; SAR(10 g) = 0.389 W/kg

Maximum value of SAR (measured) = 1.01 W/kg

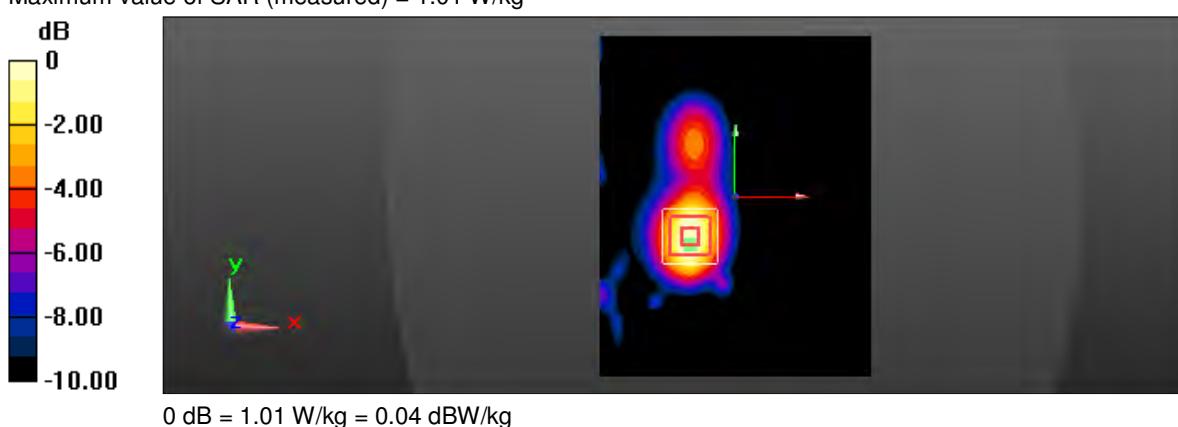

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/22/2016 11:06:11 PM

4_IEEE 802.11n 2.4GHz 20MHz CH6_6.5M_Bottom_90 degree_5mm_Antenna 0

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11n(2.4GHz) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.953 \text{ S/m}$; $\epsilon_r = 52.484$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.3, 7.3, 7.3); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x121x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0926 W/kg

Flat/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.260 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.124 W/kg

SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.045 W/kg

Maximum value of SAR (measured) = 0.0925 W/kg

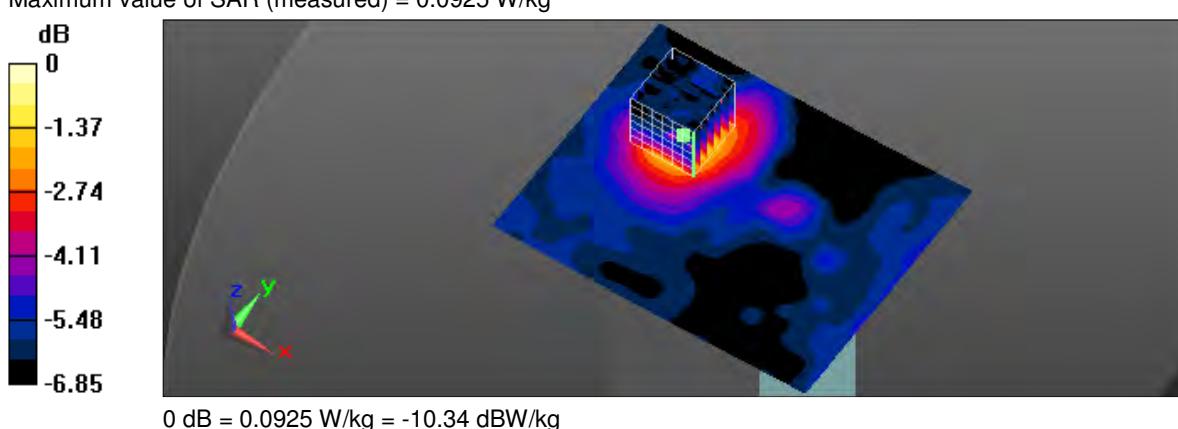

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/21/2016 6:02:34 PM

5_IEEE 802.11n 2.4GHz 40MHz CH6_13.5M_End_90 degree_10mm_Antenna 0

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11n(2.4GHz) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.953 \text{ S/m}$; $\epsilon_r = 52.484$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.3, 7.3, 7.3); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x191x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.357 W/kg

Flat/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.458 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.440 W/kg

SAR(1 g) = 0.251 W/kg; SAR(10 g) = 0.141 W/kg

Maximum value of SAR (measured) = 0.346 W/kg

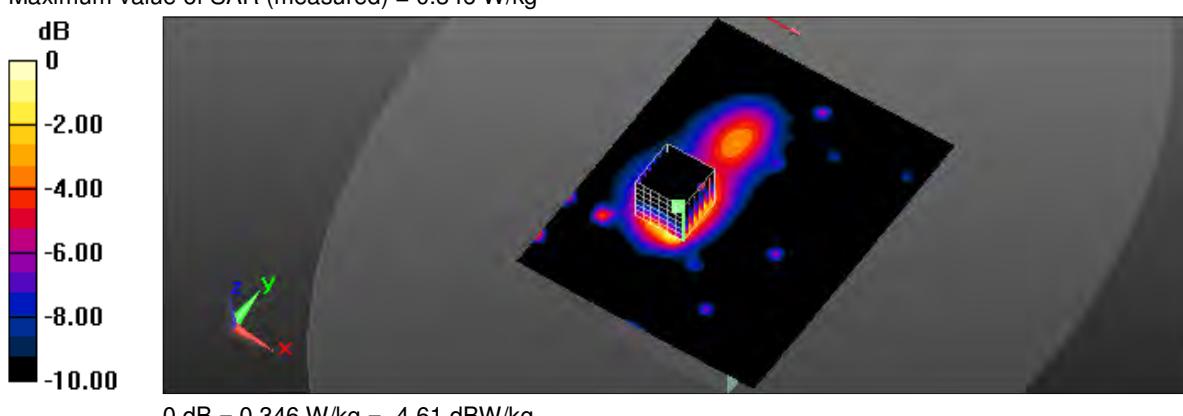

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/22/2016 10:33:02 PM

6_IIEEE 802.11n 2.4GHz 40MHz CH6_13.5M_Bottom_90 degree_5mm_Antenna 0

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11n(2.4GHz) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.953 \text{ S/m}$; $\epsilon_r = 52.484$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.3, 7.3, 7.3); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x121x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0421 W/kg

Flat/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.371 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.206 W/kg

SAR(1 g) = 0.037 W/kg; SAR(10 g) = 0.026 W/kg

Maximum value of SAR (measured) = 0.206 W/kg

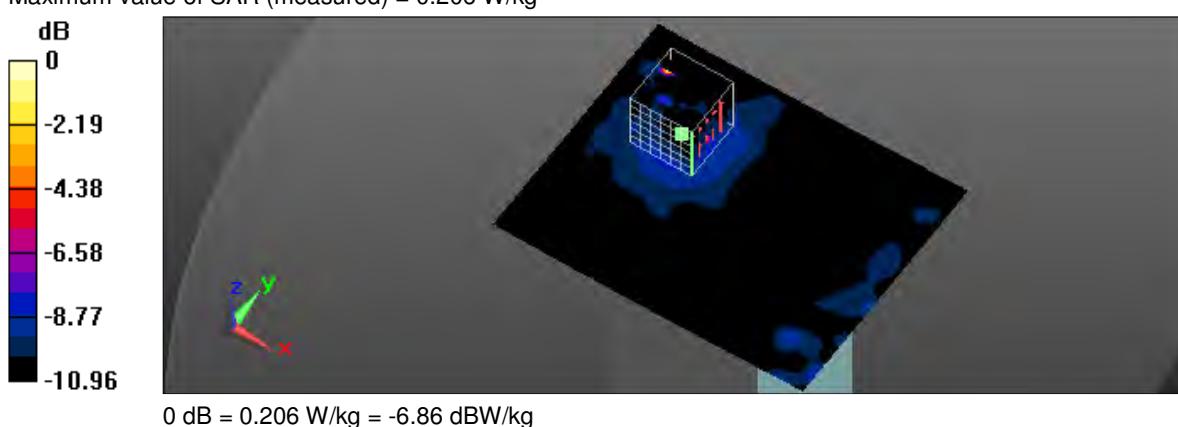

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/3/2016 11:15:50 AM

35_IEEE 802.11a CH52_6M_End_90 degree_10mm_Antenna 0

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEE E 802.11a (0); Frequency: 5260 MHz; Duty Cycle: 1:1.1

Medium parameters used: $f = 5260 \text{ MHz}$; $\sigma = 5.325 \text{ S/m}$; $\epsilon_r = 48.545$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.61, 4.61, 4.61); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x191x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 1.18 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.869 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 3.70 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.675 W/kg

Maximum value of SAR (measured) = 1.41 W/kg

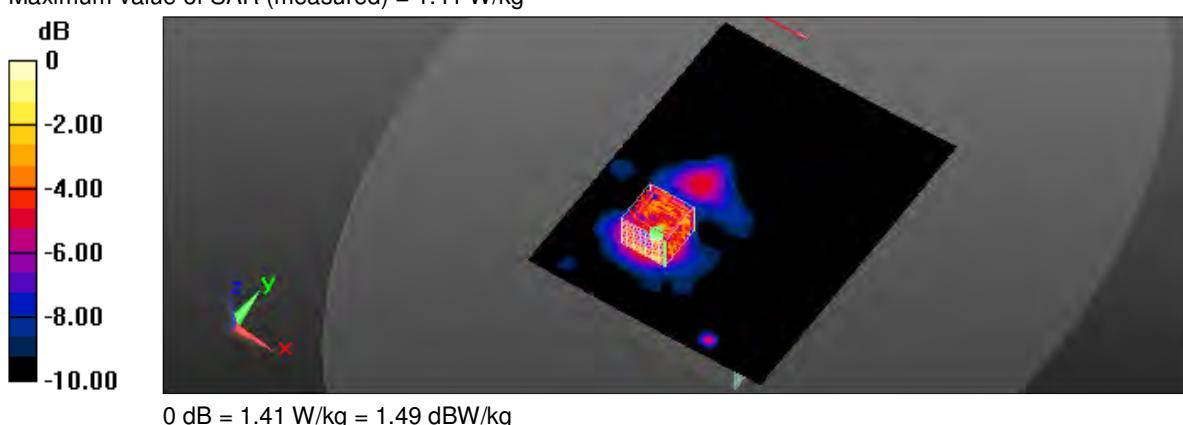

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/2/2016 8:39:05 PM

11_IEEE 802.11a CH56_6M_End_90 degree_10mm_Antenna 0

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11a (0); Frequency: 5280 MHz; Duty Cycle: 1:1.1

Medium parameters used: $f = 5280 \text{ MHz}$; $\sigma = 5.371 \text{ S/m}$; $\epsilon_r = 48.515$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.61, 4.61, 4.61); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x191x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 1.83 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 7.143 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 3.10 W/kg

SAR(1 g) = 0.869 W/kg; SAR(10 g) = 0.360 W/kg

Maximum value of SAR (measured) = 1.52 W/kg

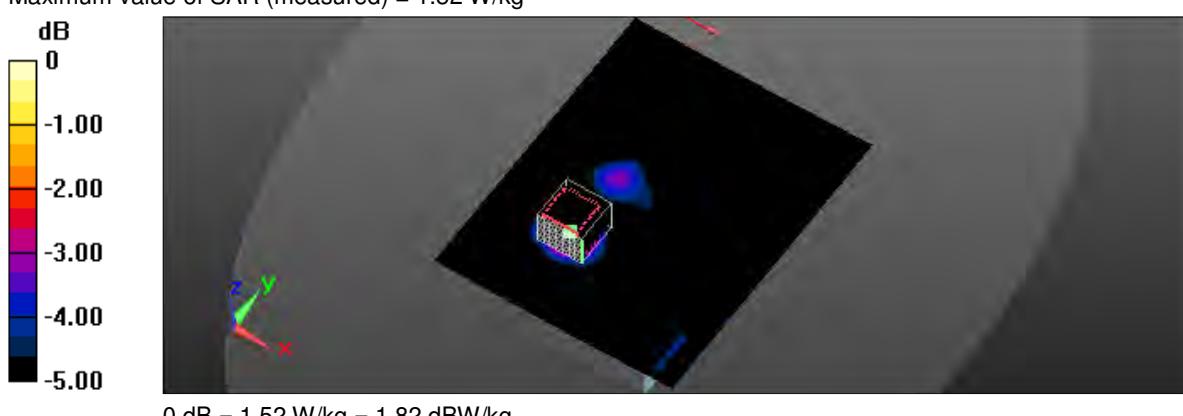

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/7/2016 5:38:14 PM

12_IEEE 802.11a CH56_6M_Bottom_90 degree_5mm_Antenna 0

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11a (0); Frequency: 5280 MHz; Duty Cycle: 1:1.1

Medium parameters used: $f = 5280 \text{ MHz}$; $\sigma = 5.371 \text{ S/m}$; $\epsilon_r = 48.515$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.61, 4.61, 4.61); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x121x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.190 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 6.249 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.147 W/kg; SAR(10 g) = 0.133 W/kg

Maximum value of SAR (measured) = 0.453 W/kg

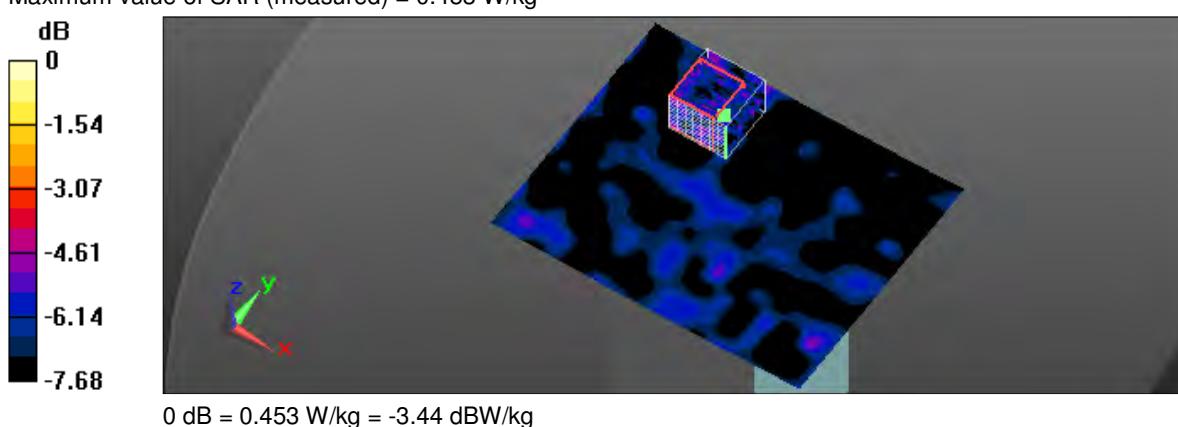

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/3/2016 1:30:25 PM

36_IEEE 802.11a CH104_6M_End_90 degree_10mm_Antenna 0

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11a (0); Frequency: 5520 MHz; Duty Cycle: 1:1.1

Medium parameters used: $f = 5520 \text{ MHz}$; $\sigma = 5.721 \text{ S/m}$; $\epsilon_r = 47.992$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.31, 4.31, 4.31); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x191x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 1.07 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.248 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 2.16 W/kg

SAR(1 g) = 0.605 W/kg; SAR(10 g) = 0.303 W/kg

Maximum value of SAR (measured) = 1.05 W/kg

Flat/Zoom Scan (8x8x12)/Cube 1:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.248 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 0.506 W/kg; SAR(10 g) = 0.264 W/kg

Maximum value of SAR (measured) = 1.10 W/kg

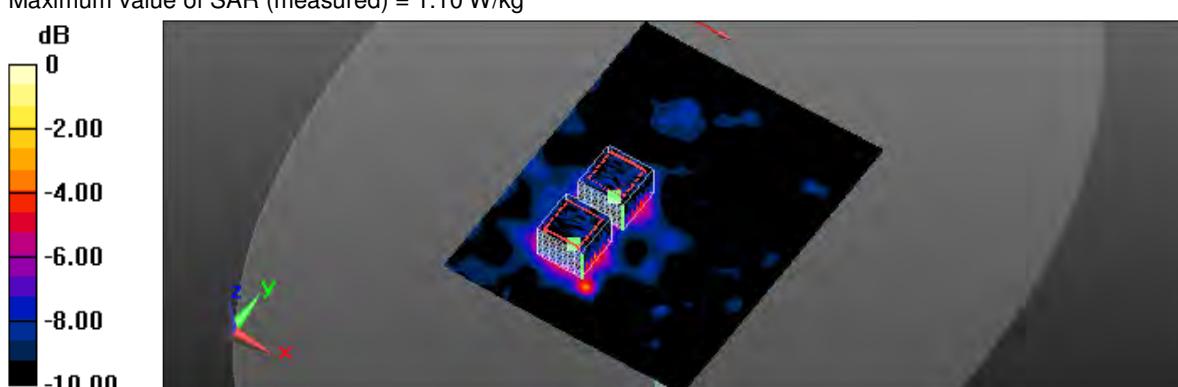

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/2/2016 9:54:43 PM

13_IEEE 802.11a CH132_6M_End_90 degree_10mm_Antenna 0

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11a (0); Frequency: 5660 MHz; Duty Cycle: 1:1.1

Medium parameters used: $f = 5660 \text{ MHz}$; $\sigma = 5.925 \text{ S/m}$; $\epsilon_r = 47.657$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.21, 4.21, 4.21); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x191x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 2.11 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 4.759 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 4.06 W/kg

SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.418 W/kg

Maximum value of SAR (measured) = 1.95 W/kg

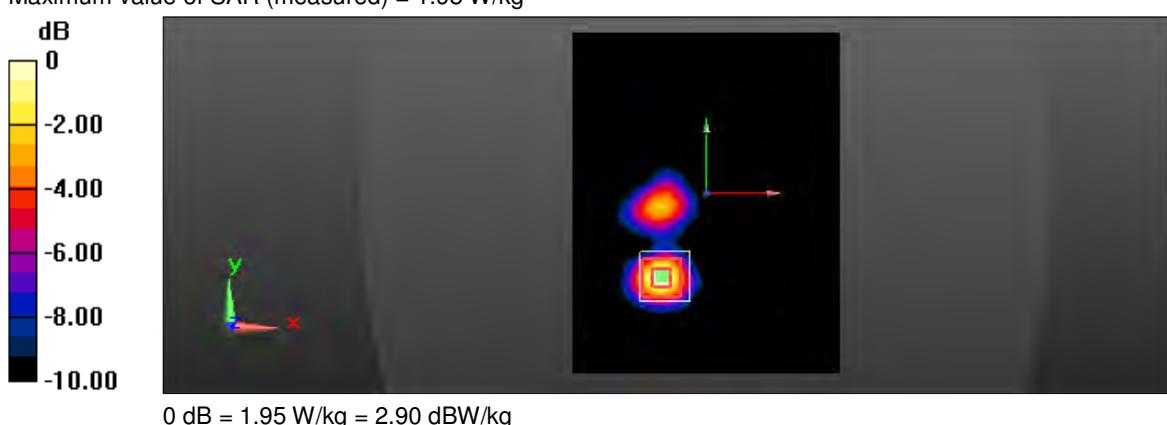

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/7/2016 8:30:20 PM

14_IEEE 802.11a CH132_6M_Bottom_90 degree_5mm_Antenna 0

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11a (0); Frequency: 5660 MHz; Duty Cycle: 1:1.1

Medium parameters used: $f = 5660 \text{ MHz}$; $\sigma = 5.925 \text{ S/m}$; $\epsilon_r = 47.657$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.21, 4.21, 4.21); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x121x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.342 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.391 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.520 W/kg

SAR(1 g) = 0.195 W/kg; SAR(10 g) = 0.172 W/kg

Maximum value of SAR (measured) = 0.520 W/kg

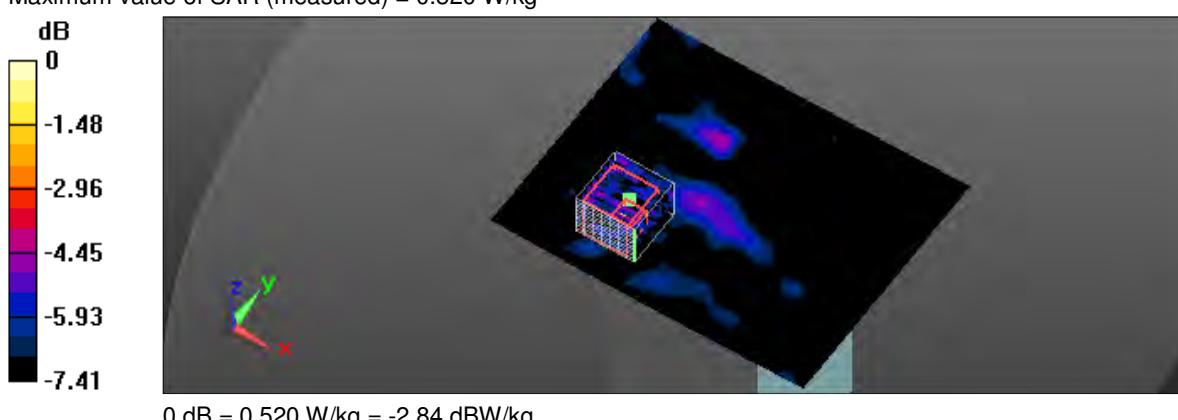

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/3/2016 2:41:08 PM

37_IEEE 802.11a CH161_6M_End_90 degree_10mm_Antenna 0

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11a (0); Frequency: 5805 MHz; Duty Cycle: 1:1.1

Medium parameters used (interpolated): $f = 5805 \text{ MHz}$; $\sigma = 6.143 \text{ S/m}$; $\epsilon_r = 47.269$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x191x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 1.67 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 6.241 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 3.41 W/kg

SAR(1 g) = 0.891 W/kg; SAR(10 g) = 0.405 W/kg

Maximum value of SAR (measured) = 1.59 W/kg

Flat/Zoom Scan (8x8x12)/Cube 1:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 6.241 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.23 W/kg

SAR(1 g) = 0.646 W/kg; SAR(10 g) = 0.319 W/kg

Maximum value of SAR (measured) = 1.13 W/kg

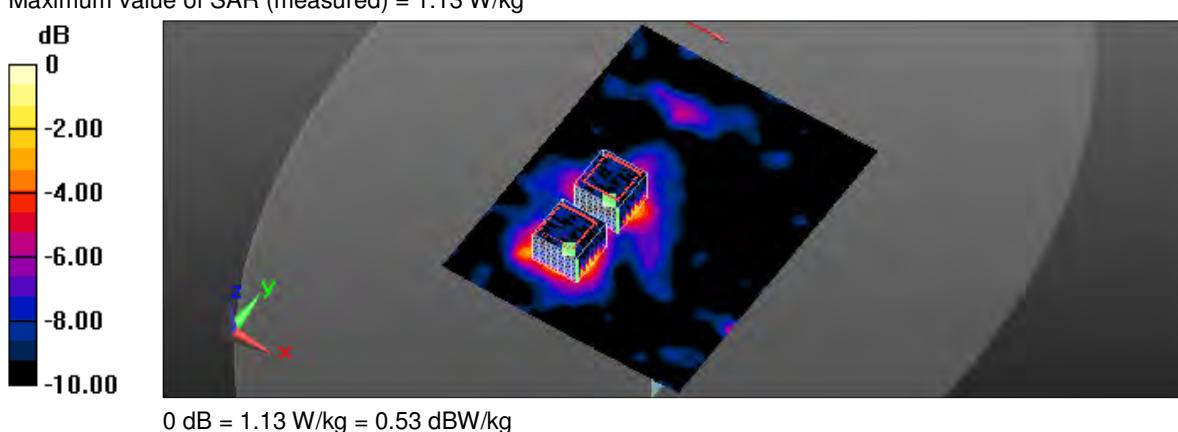

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/2/2016 10:45:06 PM

15_IEEE 802.11a CH165_6M_End_90 degree_10mm_Antenna 0

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11a (0); Frequency: 5825 MHz; Duty Cycle: 1:1.1

Medium parameters used (interpolated): $f = 5825 \text{ MHz}$; $\sigma = 6.18 \text{ S/m}$; $\epsilon_r = 47.256$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x191x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 2.16 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 6.333 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 4.33 W/kg

SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.431 W/kg

Maximum value of SAR (measured) = 1.99 W/kg

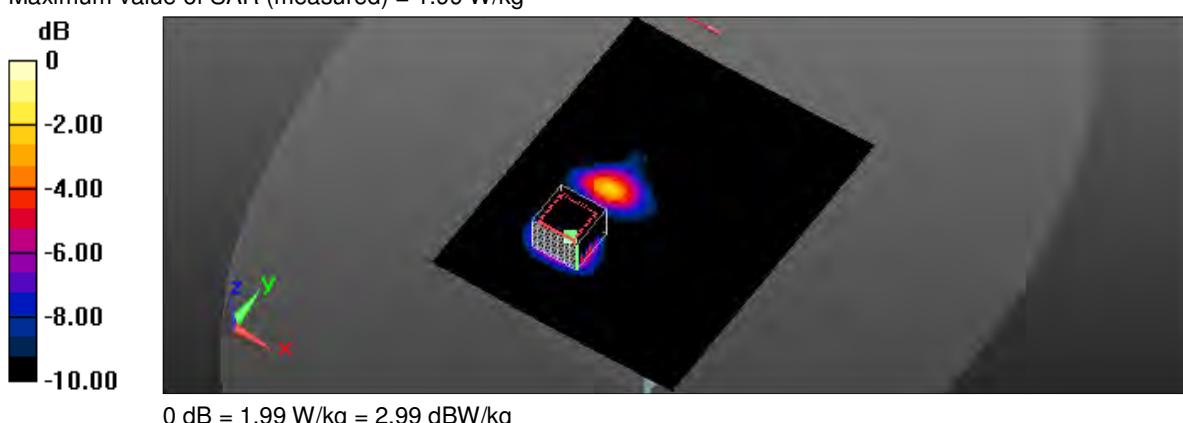

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/8/2016 12:35:51 AM

16_IEEE 802.11a CH165_6M_Bottom_90 degree_5mm_Antenna 0

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11a (0); Frequency: 5825 MHz; Duty Cycle: 1:1.1

Medium parameters used (interpolated): $f = 5825 \text{ MHz}$; $\sigma = 6.18 \text{ S/m}$; $\epsilon_r = 47.256$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x121x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.289 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.614 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.656 W/kg

SAR(1 g) = 0.216 W/kg; SAR(10 g) = 0.180 W/kg

Maximum value of SAR (measured) = 0.332 W/kg

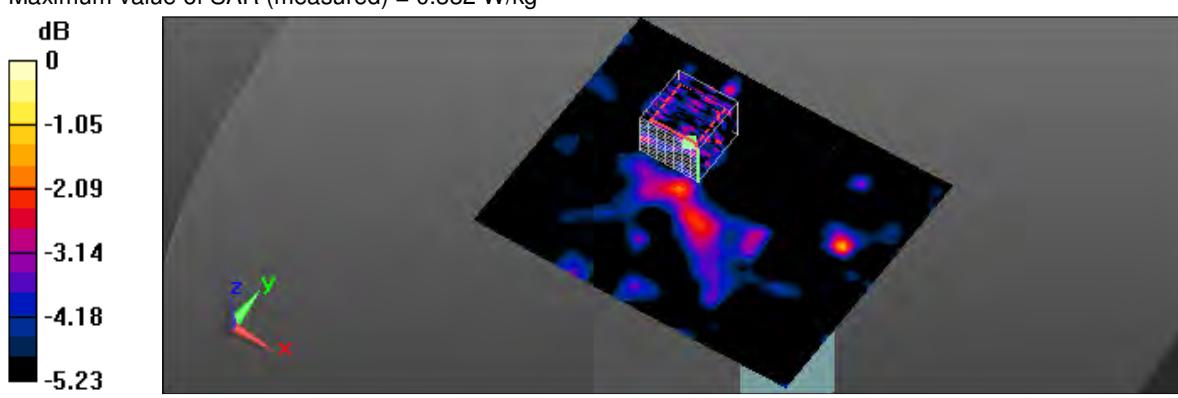

0 dB = 0.332 W/kg = -4.79 dBW/kg

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/3/2016 10:27:59 AM

17_IEEE 802.11ac 5GHz 20MHz CH52_6.5M_End_90 degree_10mm_Antenna 0

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11a (0); Frequency: 5260 MHz; Duty Cycle: 1:1.9

Medium parameters used: $f = 5260 \text{ MHz}$; $\sigma = 5.325 \text{ S/m}$; $\epsilon_r = 48.545$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.61, 4.61, 4.61); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x191x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 1.04 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.088 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 2.38 W/kg

SAR(1 g) = 0.610 W/kg; SAR(10 g) = 0.287 W/kg

Maximum value of SAR (measured) = 1.01 W/kg

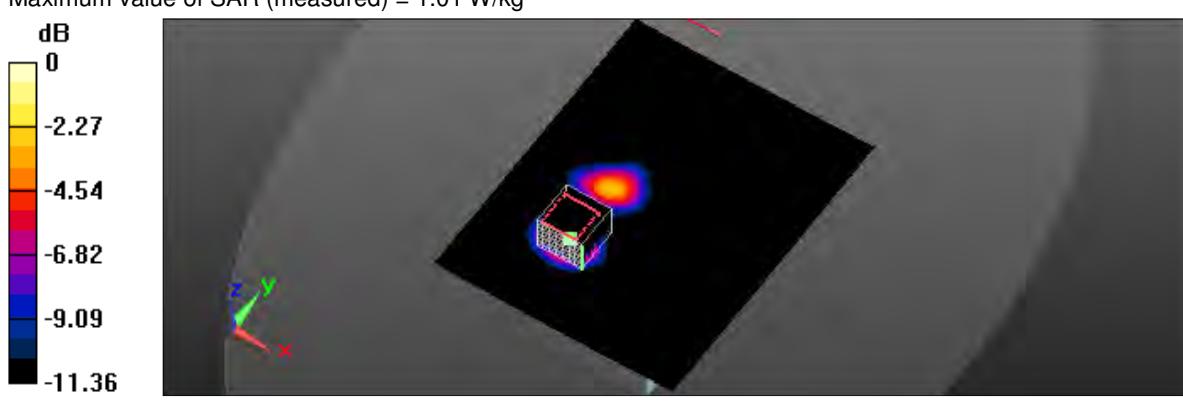

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/8/2016 1:22:58 AM

18_IEEE 802.11ac 5GHz 20MHz CH52_6.5M_Bottom_90 degree_5mm_Antenna 0

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11ac (0); Frequency: 5260 MHz; Duty Cycle: 1:1.9

Medium parameters used: $f = 5260 \text{ MHz}$; $\sigma = 5.325 \text{ S/m}$; $\epsilon_r = 48.545$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.61, 4.61, 4.61); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x121x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.200 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.658 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.457 W/kg

SAR(1 g) = 0.150 W/kg; SAR(10 g) = 0.138 W/kg

Maximum value of SAR (measured) = 0.235 W/kg

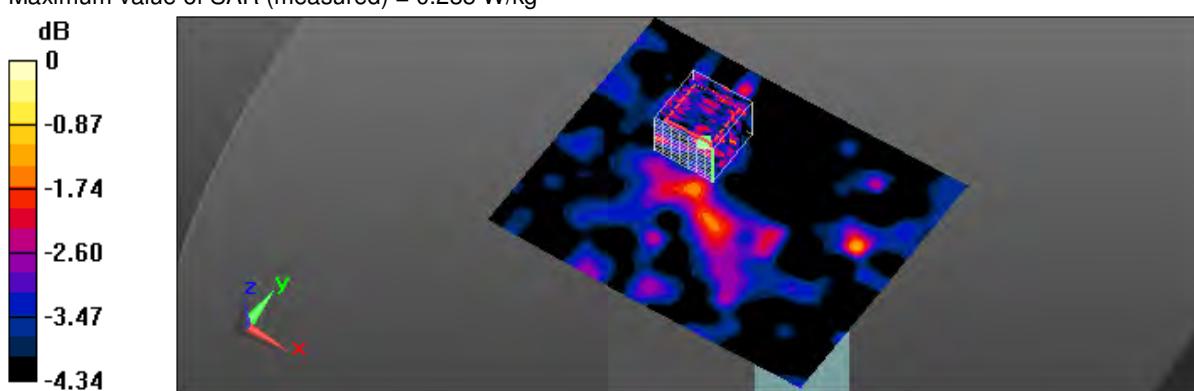

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/3/2016 3:57:01 PM

19_IEEE 802.11ac 5GHz 20MHz CH116_6.5M_End_90 degree_10mm_Antenna 0

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11ac (0); Frequency: 5580 MHz; Duty Cycle: 1:1.9

Medium parameters used: $f = 5580 \text{ MHz}$; $\sigma = 5.831 \text{ S/m}$; $\epsilon_r = 47.944$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.21, 4.21, 4.21); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x191x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 1.08 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 4.891 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.39 W/kg

SAR(1 g) = 0.635 W/kg; SAR(10 g) = 0.313 W/kg

Maximum value of SAR (measured) = 1.08 W/kg

Flat/Zoom Scan (8x8x12)/Cube 1:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 4.891 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.454 W/kg; SAR(10 g) = 0.253 W/kg

Maximum value of SAR (measured) = 0.764 W/kg

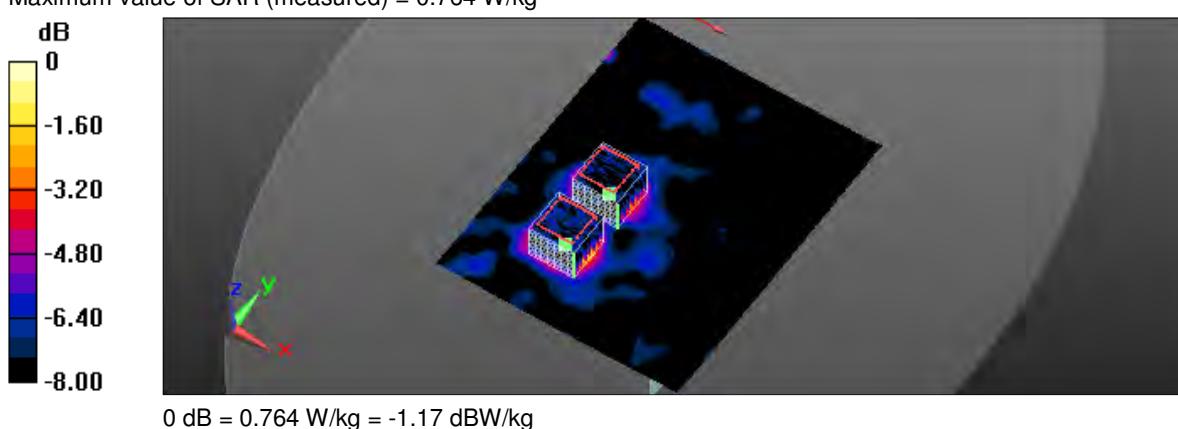

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/8/2016 2:51:00 PM

20_IIEEE 802.11ac 5GHz 20MHz CH116_6.5M_Bottom_90 degree_5mm_Antenna 0

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11ac (0); Frequency: 5580 MHz; Duty Cycle: 1:1.9

Medium parameters used: $f = 5580 \text{ MHz}$; $\sigma = 5.831 \text{ S/m}$; $\epsilon_r = 47.944$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.21, 4.21, 4.21); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x121x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.219 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.869 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.619 W/kg

SAR(1 g) = 0.185 W/kg; SAR(10 g) = 0.173 W/kg

Maximum value of SAR (measured) = 0.619 W/kg

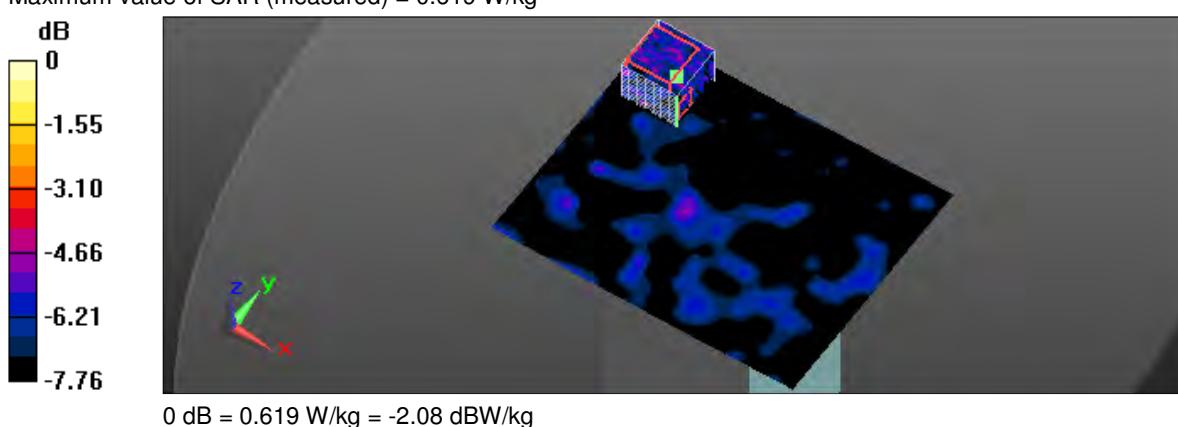

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/4/2016 9:56:05 AM

21_IEEE 802.11ac 5GHz 20MHz CH157_6.5M_End_90 degree_10mm_Antenna 0

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11a (0); Frequency: 5785 MHz; Duty Cycle: 1:1.9

Medium parameters used (interpolated): $f = 5785 \text{ MHz}$; $\sigma = 6.094 \text{ S/m}$; $\epsilon_r = 47.324$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x191x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 1.15 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 7.633 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.09 W/kg

SAR(1 g) = 0.663 W/kg; SAR(10 g) = 0.334 W/kg

Maximum value of SAR (measured) = 1.06 W/kg

Flat/Zoom Scan (8x8x12)/Cube 1:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 7.633 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.74 W/kg

SAR(1 g) = 0.494 W/kg; SAR(10 g) = 0.275 W/kg

Maximum value of SAR (measured) = 0.747 W/kg

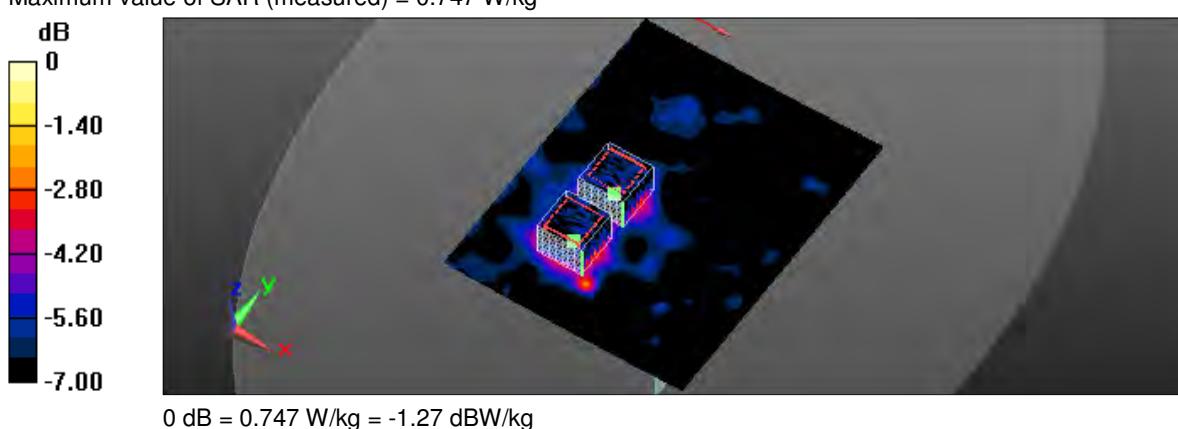

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/8/2016 12:58:23 PM

22_IEEE 802.11ac 5GHz 20MHz CH157_6.5M_Bottom_90 degree_5mm_Antenna 0

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11ac (0); Frequency: 5785 MHz; Duty Cycle: 1:1.9

Medium parameters used (interpolated): $f = 5785 \text{ MHz}$; $\sigma = 6.094 \text{ S/m}$; $\epsilon_r = 47.324$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x121x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.258 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 4.993 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.772 W/kg

SAR(1 g) = 0.196 W/kg; SAR(10 g) = 0.174 W/kg

Maximum value of SAR (measured) = 0.772 W/kg

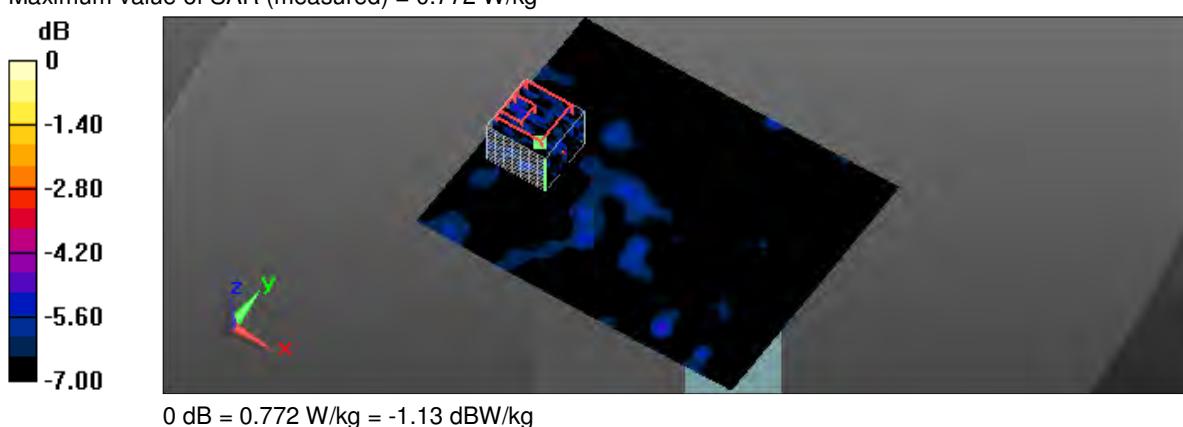

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/3/2016 5:09:04 PM

23_IEEE 802.11ac 5GHz 40MHz CH38_13.5M_End_90 degree_10mm_Antenna 0

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11ac (0); Frequency: 5190 MHz; Duty Cycle: 1:2.23

Medium parameters used: $f = 5190 \text{ MHz}$; $\sigma = 5.235 \text{ S/m}$; $\epsilon_r = 48.779$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x191x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 1.22 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 6.345 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 2.36 W/kg

SAR(1 g) = 0.695 W/kg; SAR(10 g) = 0.324 W/kg

Maximum value of SAR (measured) = 1.16 W/kg

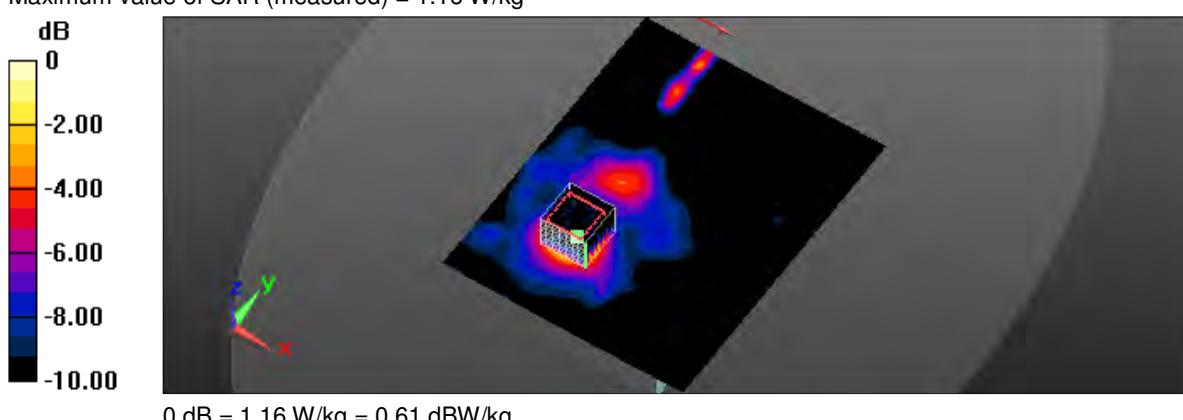

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/8/2016 4:17:47 PM

24_IIEEE 802.11ac 5GHz 40MHz CH38_13.5M_Bottom_90 degree_5mm_Antenna 0

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11ac (0); Frequency: 5190 MHz; Duty Cycle: 1:2.23

Medium parameters used: $f = 5190 \text{ MHz}$; $\sigma = 5.235 \text{ S/m}$; $\epsilon_r = 48.779$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x121x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.181 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.280 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 0.202 W/kg; SAR(10 g) = 0.143 W/kg

Maximum value of SAR (measured) = 0.849 W/kg

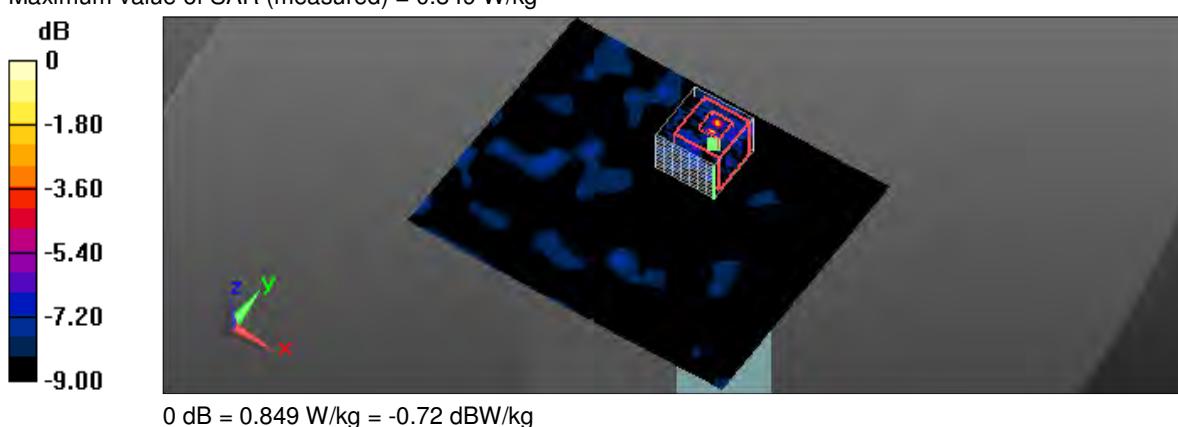

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/3/2016 5:58:44 PM

25_IIEEE 802.11ac 5GHz 40MHz CH118_13.5M_End_90 degree_10mm_Antenna 0

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11ac (0); Frequency: 5590 MHz; Duty Cycle: 1:2.23

Medium parameters used: $f = 5590 \text{ MHz}$; $\sigma = 5.836 \text{ S/m}$; $\epsilon_r = 47.916$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.21, 4.21, 4.21); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x191x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.899 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 4.523 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 0.514 W/kg; SAR(10 g) = 0.269 W/kg

Maximum value of SAR (measured) = 0.832 W/kg

Flat/Zoom Scan (8x8x12)/Cube 1:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 4.523 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.383 W/kg; SAR(10 g) = 0.228 W/kg

Maximum value of SAR (measured) = 0.605 W/kg

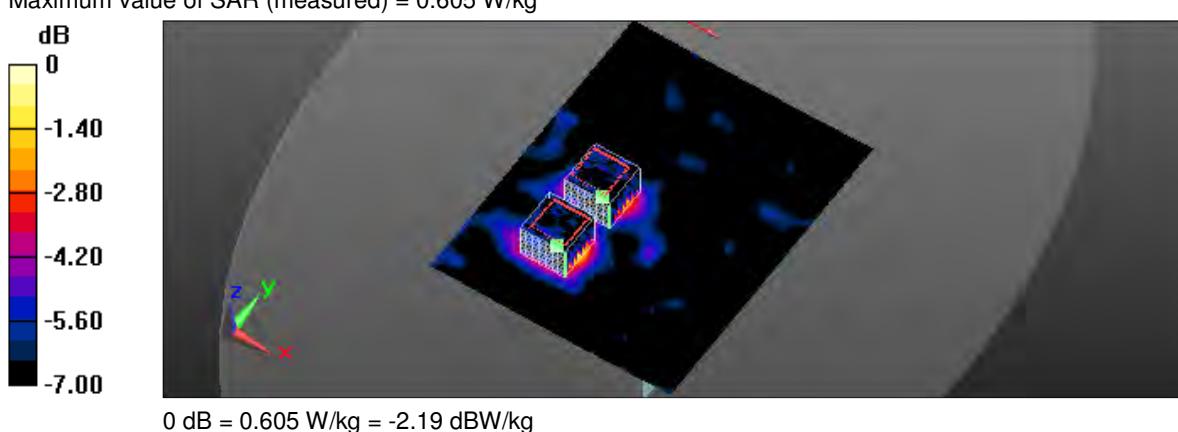

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/8/2016 6:21:57 PM

26_IEEE 802.11ac 5GHz 40MHz CH118_13.5M_Bottom_90 degree_5mm_Antenna 0

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11ac (0); Frequency: 5590 MHz; Duty Cycle: 1:2.23

Medium parameters used: $f = 5590 \text{ MHz}$; $\sigma = 5.836 \text{ S/m}$; $\epsilon_r = 47.916$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.21, 4.21, 4.21); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x121x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.179 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.552 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.958 W/kg

SAR(1 g) = 0.179 W/kg; SAR(10 g) = 0.164 W/kg

Maximum value of SAR (measured) = 0.958 W/kg

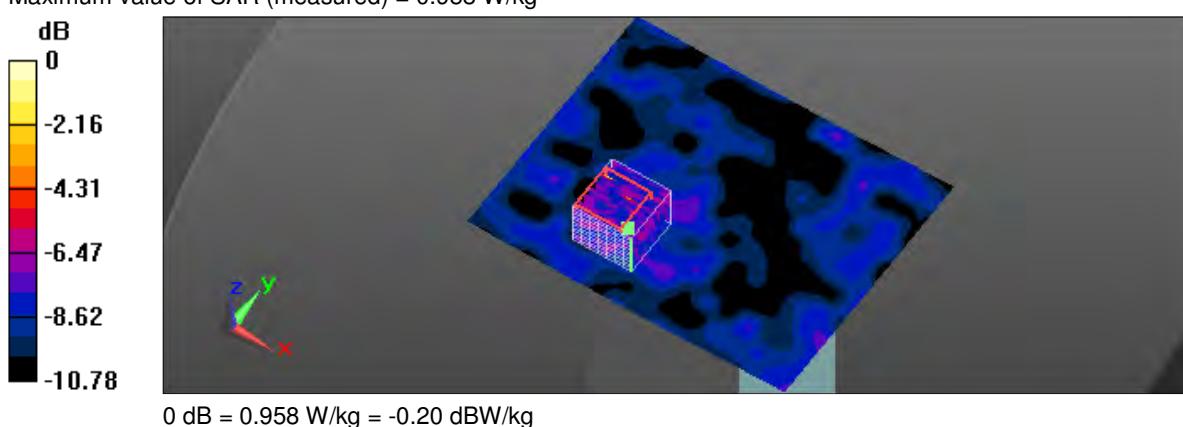

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/3/2016 7:15:39 PM

27_IEEE 802.11ac 5GHz 40MHz CH151_13.5M_End_90 degree_10mm_Antenna 0

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11ac (0); Frequency: 5755 MHz; Duty Cycle: 1:2.23

Medium parameters used (interpolated): $f = 5755 \text{ MHz}$; $\sigma = 6.041 \text{ S/m}$; $\epsilon_r = 47.438$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x191x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.875 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.207 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.95 W/kg

SAR(1 g) = 0.514 W/kg; SAR(10 g) = 0.270 W/kg

Maximum value of SAR (measured) = 0.877 W/kg

Flat/Zoom Scan (8x8x12)/Cube 1:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.207 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.396 W/kg; SAR(10 g) = 0.226 W/kg

Maximum value of SAR (measured) = 0.613 W/kg

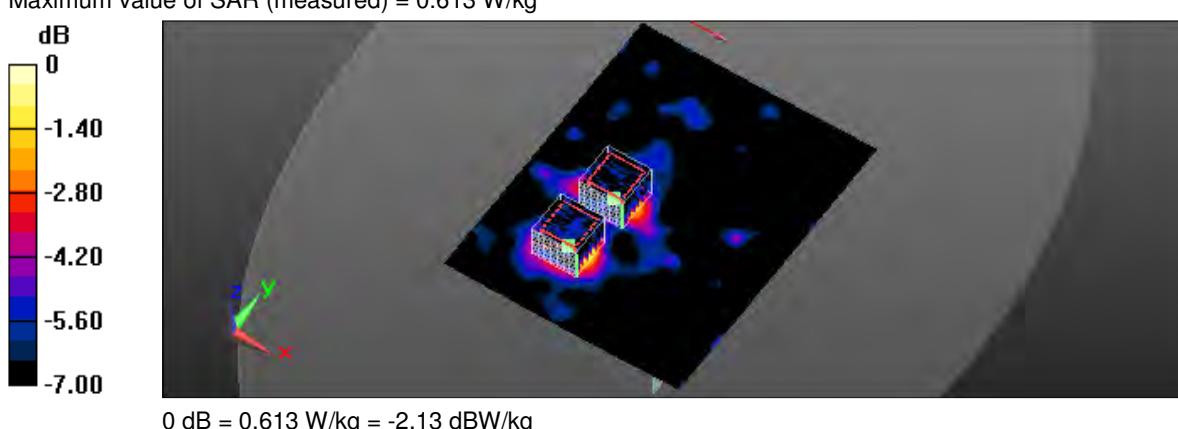

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/8/2016 7:27:18 PM

28_IEEE 802.11ac 5GHz 40MHz CH151_13.5M_Bottom_90 degree_5mm_Antenna 0

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11ac (0); Frequency: 5755 MHz; Duty Cycle: 1:2.23

Medium parameters used (interpolated): $f = 5755 \text{ MHz}$; $\sigma = 6.041 \text{ S/m}$; $\epsilon_r = 47.438$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x121x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.263 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.937 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.825 W/kg

SAR(1 g) = 0.176 W/kg; SAR(10 g) = 0.163 W/kg

Maximum value of SAR (measured) = 0.825 W/kg

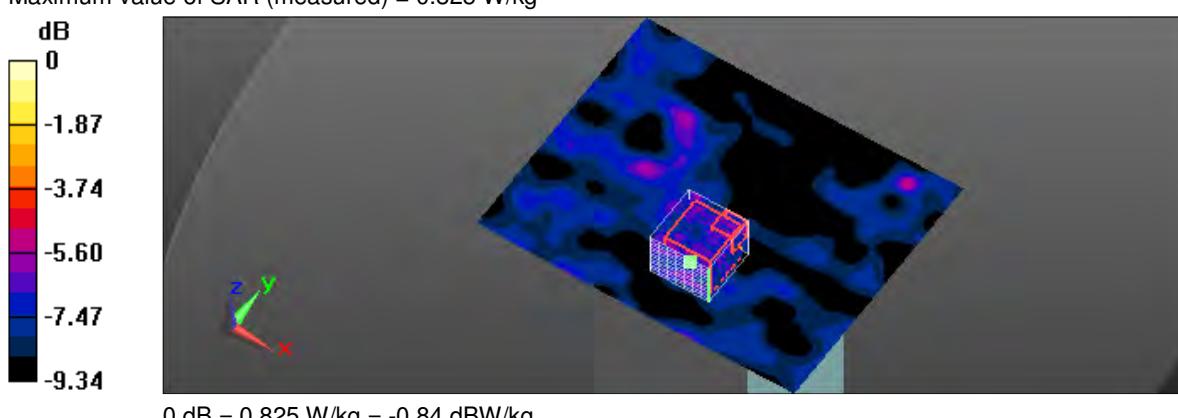

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/4/2016 10:48:45 AM

29_IEEE 802.11ac 5GHz 80MHz CH42_29.3M_End_90 degree_10mm_Antenna 0

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11ac (0); Frequency: 5210 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 5210 \text{ MHz}$; $\sigma = 5.253 \text{ S/m}$; $\epsilon_r = 48.745$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x191x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.767 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 6.969 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 2.15 W/kg

SAR(1 g) = 0.472 W/kg; SAR(10 g) = 0.251 W/kg

Maximum value of SAR (measured) = 0.753 W/kg

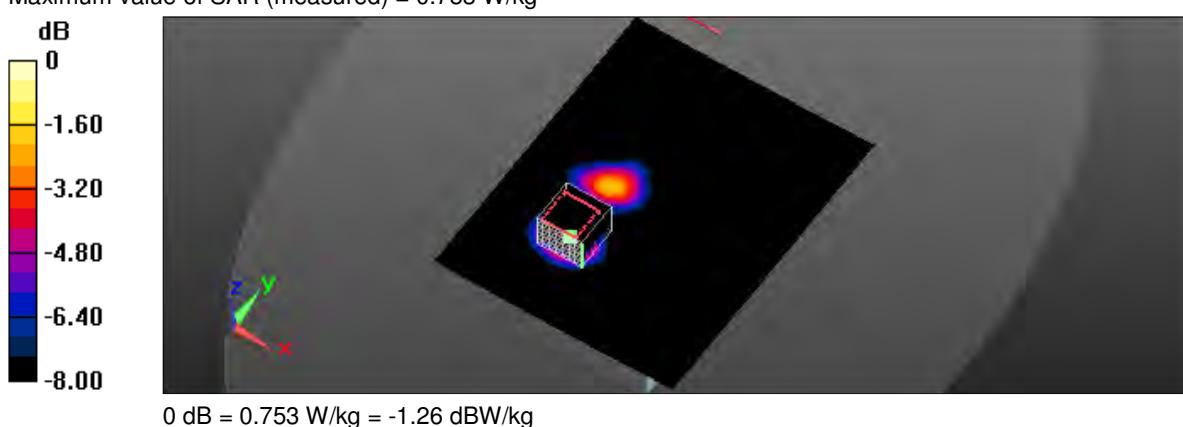

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/8/2016 8:50:51 PM

30_IIEEE 802.11ac 5GHz 80MHz CH42_29.5M_Bottom_90 degree_5mm_Antenna 0

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11ac (0); Frequency: 5210 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 5210 \text{ MHz}$; $\sigma = 5.253 \text{ S/m}$; $\epsilon_r = 48.745$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x121x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.181 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 4.358 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.277 W/kg

SAR(1 g) = 0.143 W/kg; SAR(10 g) = 0.128 W/kg

Maximum value of SAR (measured) = 0.277 W/kg

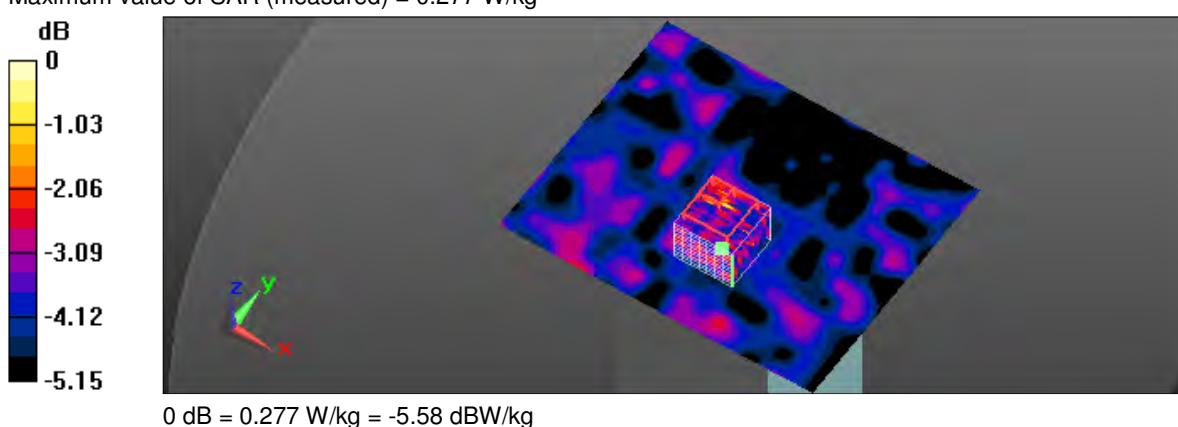

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/4/2016 11:29:06 AM

31_IEEE 802.11ac 5GHz 80MHz CH122_29.3M_End_90 degree_10mm_Antenna 0

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11ac (0); Frequency: 5610 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 5610 \text{ MHz}$; $\sigma = 5.848 \text{ S/m}$; $\epsilon_r = 47.851$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.21, 4.21, 4.21); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x191x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.714 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 6.485 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 2.37 W/kg

SAR(1 g) = 0.489 W/kg; SAR(10 g) = 0.271 W/kg

Maximum value of SAR (measured) = 0.733 W/kg

Flat/Zoom Scan (8x8x12)/Cube 1:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 6.485 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 1.58 W/kg

SAR(1 g) = 0.387 W/kg; SAR(10 g) = 0.238 W/kg

Maximum value of SAR (measured) = 0.568 W/kg

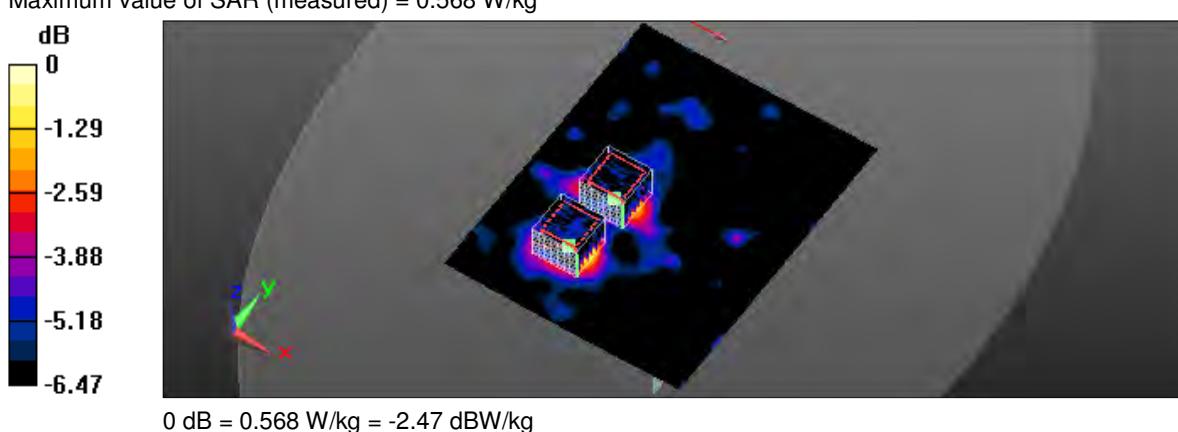

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/9/2016 12:40:22 AM

32_IEEE 802.11ac 5GHz 80MHz CH122_29.5M_Bottom_90 degree_5mm_Antenna 0

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11ac (0); Frequency: 5610 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 5610 \text{ MHz}$; $\sigma = 5.848 \text{ S/m}$; $\epsilon_r = 47.851$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.21, 4.21, 4.21); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x121x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.218 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.335 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.299 W/kg

SAR(1 g) = 0.193 W/kg; SAR(10 g) = 0.173 W/kg

Maximum value of SAR (measured) = 0.299 W/kg

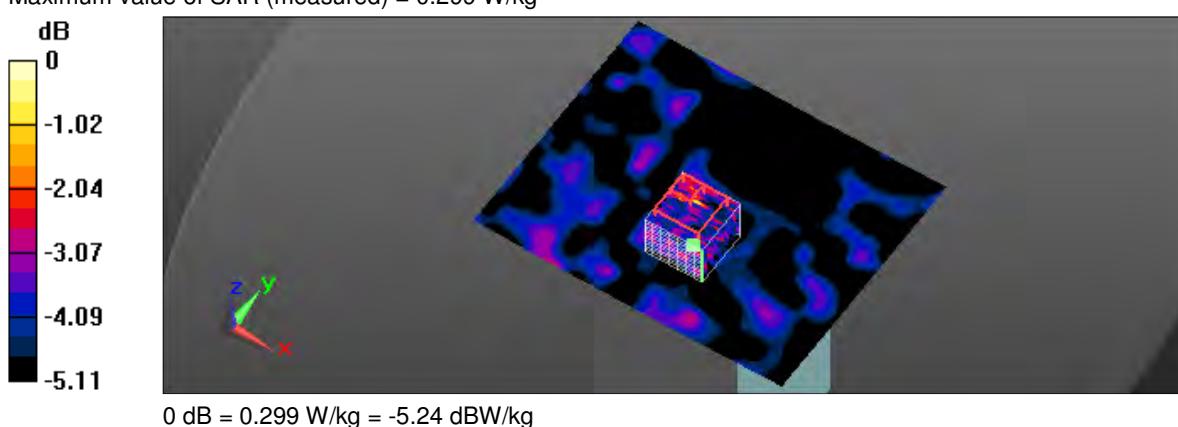

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/4/2016 12:25:58 PM

33_IEEE 802.11ac 5GHz 80MHz CH155_29.3M_End_90 degree_10mm_Antenna 0

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11ac (0); Frequency: 5775 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 5775 \text{ MHz}$; $\sigma = 6.072 \text{ S/m}$; $\epsilon_r = 47.337$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x191x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 1.02 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 7.241 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 2.91 W/kg

SAR(1 g) = 0.596 W/kg; SAR(10 g) = 0.307 W/kg

Maximum value of SAR (measured) = 0.926 W/kg

Flat/Zoom Scan (8x8x12)/Cube 1:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 7.241 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 2.15 W/kg

SAR(1 g) = 0.481 W/kg; SAR(10 g) = 0.265 W/kg

Maximum value of SAR (measured) = 0.758 W/kg

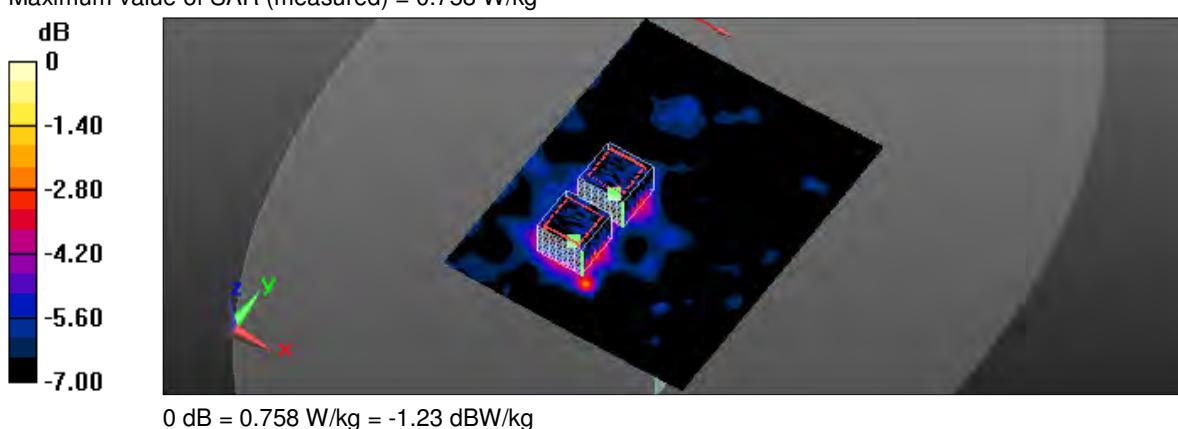

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/9/2016 11:30:22 AM

34_IEEE 802.11ac 5GHz 80MHz CH155_29.5M_Bottom_90 degree_5mm_Antenna 0

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11ac (0); Frequency: 5775 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 5775 \text{ MHz}$; $\sigma = 6.072 \text{ S/m}$; $\epsilon_r = 47.337$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x121x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.712 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 6.018 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.510 W/kg

SAR(1 g) = 0.207 W/kg; SAR(10 g) = 0.180 W/kg

Maximum value of SAR (measured) = 0.510 W/kg

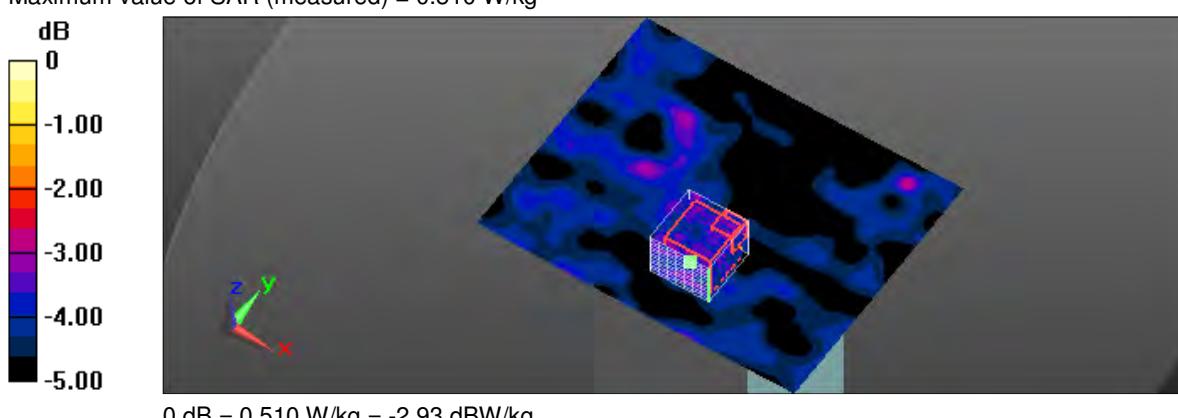

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/2/2016 11:58:47 PM

53_IEEE 802.11a CH165_6M_End_90 degree_10mm_Antenna 0_original #15_measurement once

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11a (0); Frequency: 5825 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5825 \text{ MHz}$; $\sigma = 6.18 \text{ S/m}$; $\epsilon_r = 47.256$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x191x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 2.12 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.567 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 6.34 W/kg

SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.461 W/kg

Maximum value of SAR (measured) = 2.26 W/kg

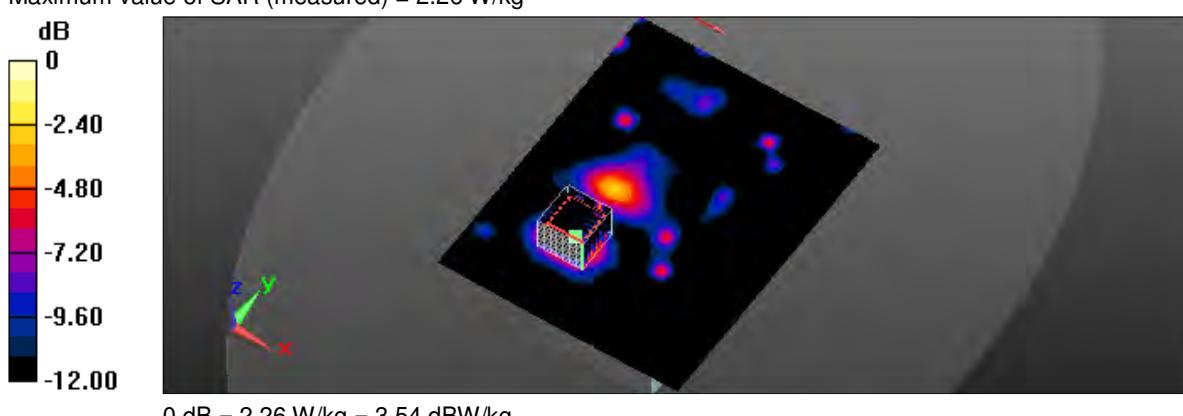

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/22/2016 12:10:32 AM

7_IEEE 802.11n 2.4GHz 20MHz CH6_6.5M_End_90 degree_10mm_Antenna 1

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11n(2.4GHz) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.953 \text{ S/m}$; $\epsilon_r = 52.484$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.3, 7.3, 7.3); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x191x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.891 W/kg

Flat/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.364 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.622 W/kg; SAR(10 g) = 0.342 W/kg

Maximum value of SAR (measured) = 0.867 W/kg

Flat/Zoom Scan (7x7x7)/Cube 1:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.364 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.733 W/kg

SAR(1 g) = 0.413 W/kg; SAR(10 g) = 0.230 W/kg

Maximum value of SAR (measured) = 0.578 W/kg

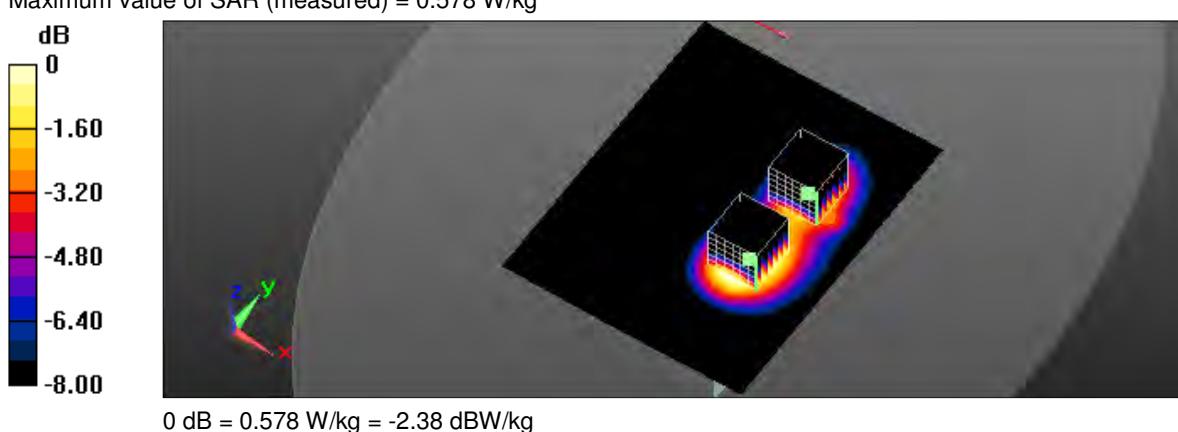

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/22/2016 1:39:35 AM

8_IEEE 802.11n 2.4GHz 20MHz CH6_6.5M_Bottom_90 degree_5mm_Antenna 1

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11n(2.4GHz) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.953 \text{ S/m}$; $\epsilon_r = 52.484$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.3, 7.3, 7.3); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x121x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0867 W/kg

Flat/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.555 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.101 W/kg

SAR(1 g) = 0.066 W/kg; SAR(10 g) = 0.045 W/kg

Maximum value of SAR (measured) = 0.0839 W/kg

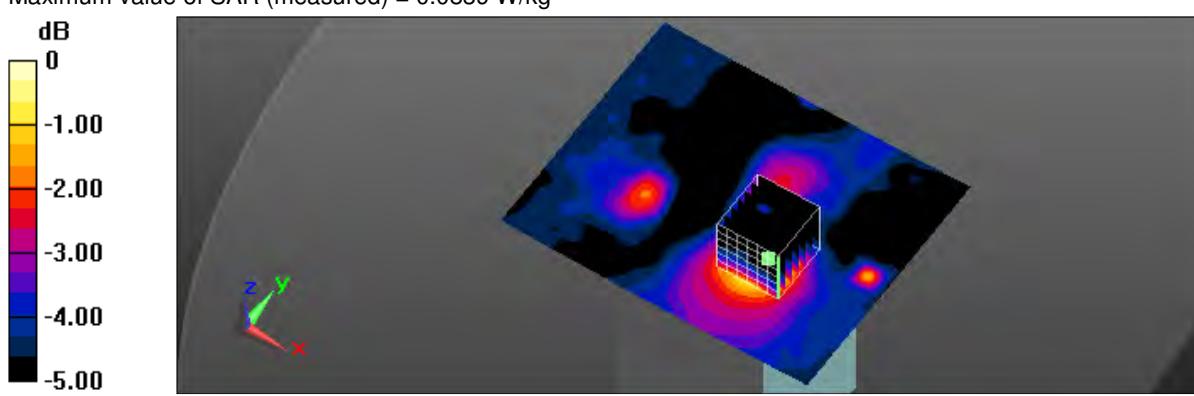

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/21/2016 9:43:32 PM

9_IEEE 802.11n 2.4GHz 40MHz CH6_13.5M_End_90 degree_10mm_Antenna 1

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11n(2.4GHz) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.953 \text{ S/m}$; $\epsilon_r = 52.484$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.3, 7.3, 7.3); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x191x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0791 W/kg

Flat/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.706 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.0920 W/kg

SAR(1 g) = 0.021 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.0921 W/kg

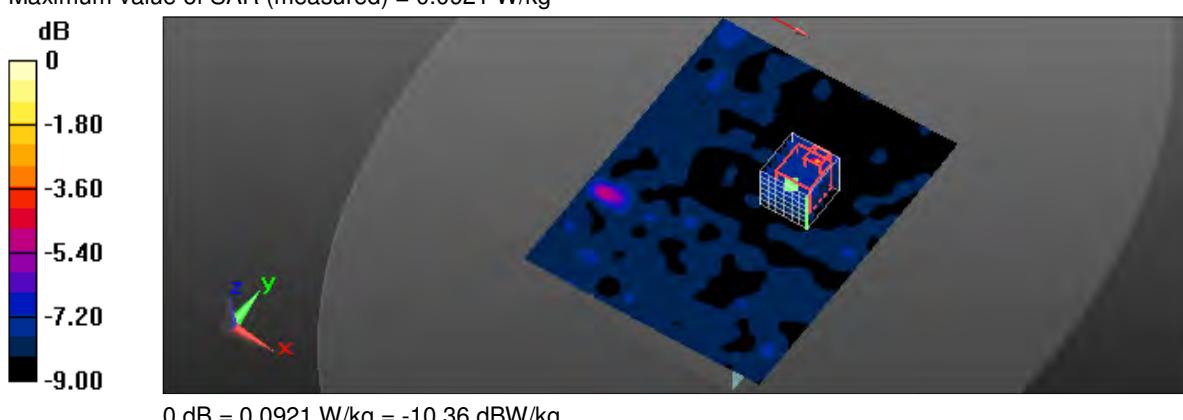

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/22/2016 5:29:46 PM

10_IIEEE 802.11n 2.4GHz 40MHz CH6_13.5M_Bottom_90 degree_5mm_Antenna 1

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11n(2.4GHz) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.953 \text{ S/m}$; $\epsilon_r = 52.484$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.3, 7.3, 7.3); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x121x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0384 W/kg

Flat/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.452 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0410 W/kg

SAR(1 g) = 0.0205 W/kg; SAR(10 g) = 0.019 W/kg

Maximum value of SAR (measured) = 0.0410 W/kg

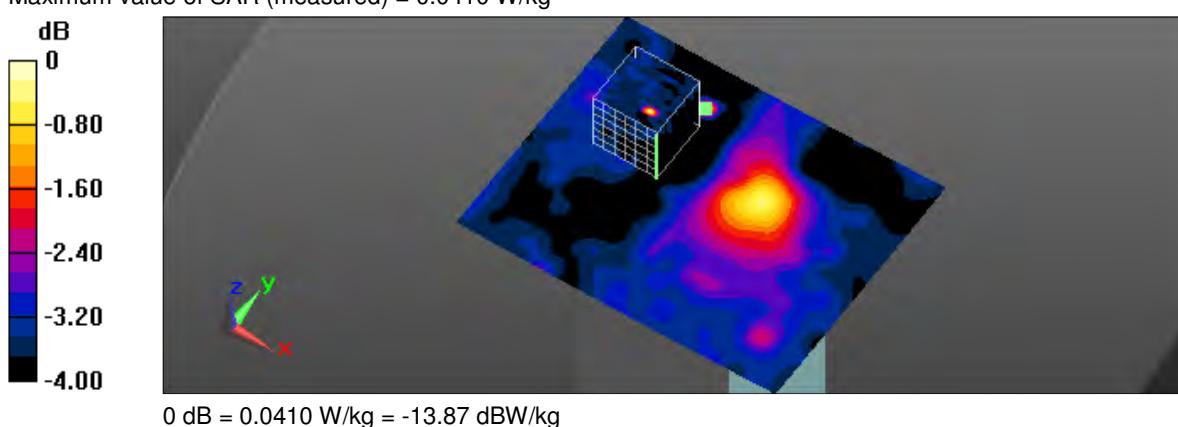

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/4/2016 2:44:47 PM

35_IEEE 802.11ac 5GHz 20MHz CH52_6.5M_End_90 degree_10mm_Antenna 1

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11ac (0); Frequency: 5260 MHz; Duty Cycle: 1:1.9

Medium parameters used: $f = 5260 \text{ MHz}$; $\sigma = 5.325 \text{ S/m}$; $\epsilon_r = 48.545$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.61, 4.61, 4.61); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x191x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 1.20 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 6.457 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 2.57 W/kg

SAR(1 g) = 0.689 W/kg; SAR(10 g) = 0.329 W/kg

Maximum value of SAR (measured) = 1.15 W/kg

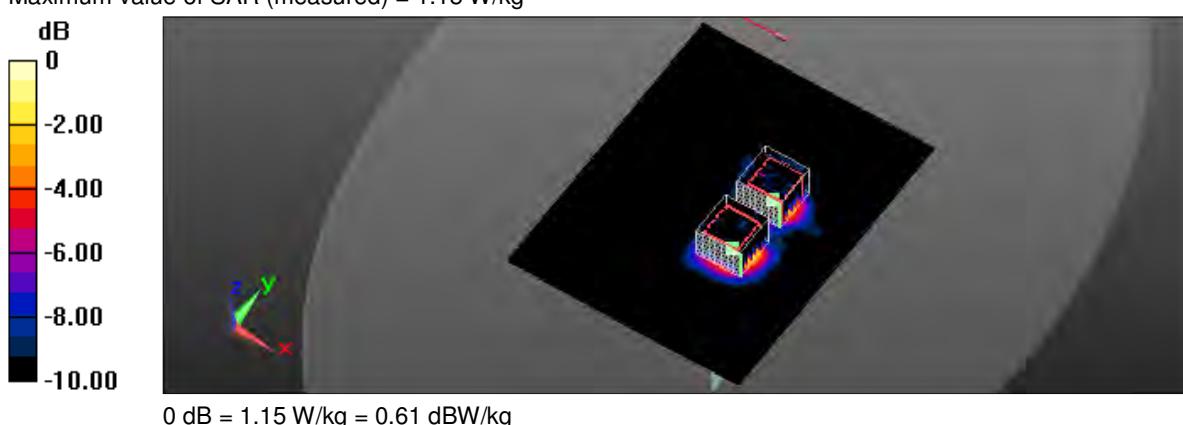

$0 \text{ dB} = 1.15 \text{ W/kg} = 0.61 \text{ dBW/kg}$

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/9/2016 1:03:10 PM

36_IEEE 802.11ac 5GHz 20MHz CH52_6.5M_Bottom_90 degree_5mm_Antenna 1

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11ac (0); Frequency: 5260 MHz; Duty Cycle: 1:1.9

Medium parameters used: $f = 5260 \text{ MHz}$; $\sigma = 5.325 \text{ S/m}$; $\epsilon_r = 48.545$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.61, 4.61, 4.61); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x121x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.220 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 4.904 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.601 W/kg

SAR(1 g) = 0.149 W/kg; SAR(10 g) = 0.139 W/kg

Maximum value of SAR (measured) = 0.601 W/kg

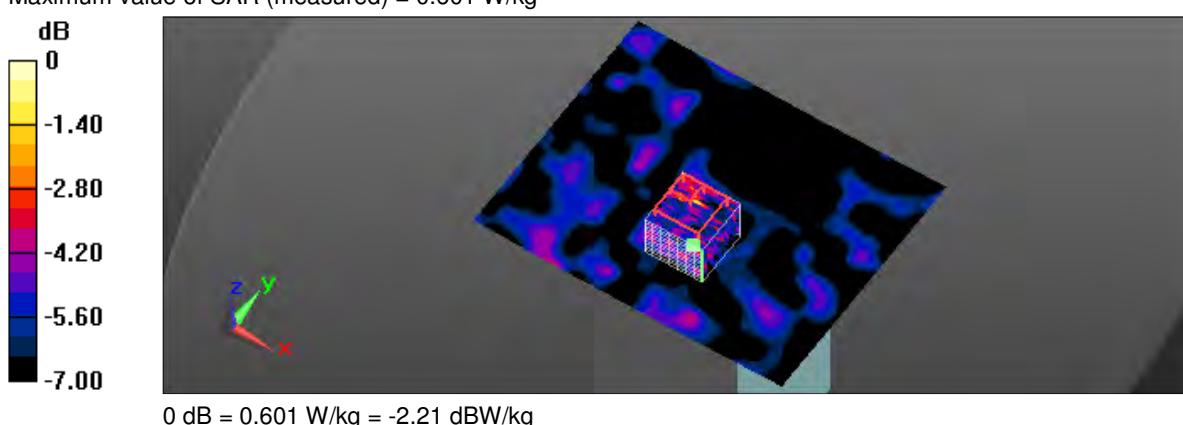

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/4/2016 3:27:00 PM

37_IEEE 802.11ac 5GHz 20MHz CH112_6.5M_End_90 degree_10mm_Antenna 1

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11ac (0); Frequency: 5560 MHz; Duty Cycle: 1:1.9

Medium parameters used: $f = 5560 \text{ MHz}$; $\sigma = 5.805 \text{ S/m}$; $\epsilon_r = 47.915$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.21, 4.21, 4.21); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x191x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 1.02 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.546 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 2.95 W/kg

SAR(1 g) = 0.595 W/kg; SAR(10 g) = 0.301 W/kg

Maximum value of SAR (measured) = 0.948 W/kg

Flat/Zoom Scan (8x8x12)/Cube 1:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.546 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 2.01 W/kg

SAR(1 g) = 0.438 W/kg; SAR(10 g) = 0.242 W/kg

Maximum value of SAR (measured) = 0.680 W/kg

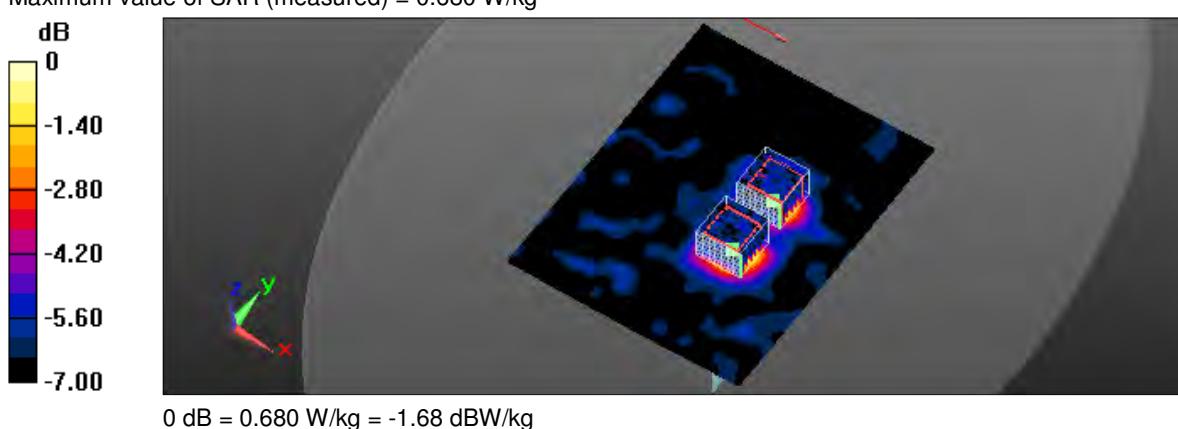

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/9/2016 3:08:20 PM

38_IEEE 802.11ac 5GHz 20MHz CH112_6.5M_Bottom_90 degree_5mm_Antenna 1

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11ac (0); Frequency: 5560 MHz; Duty Cycle: 1:1.9

Medium parameters used: $f = 5560 \text{ MHz}$; $\sigma = 5.805 \text{ S/m}$; $\epsilon_r = 47.915$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.21, 4.21, 4.21); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x121x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.651 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.362 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.789 W/kg

SAR(1 g) = 0.195 W/kg; SAR(10 g) = 0.176 W/kg

Maximum value of SAR (measured) = 0.574 W/kg

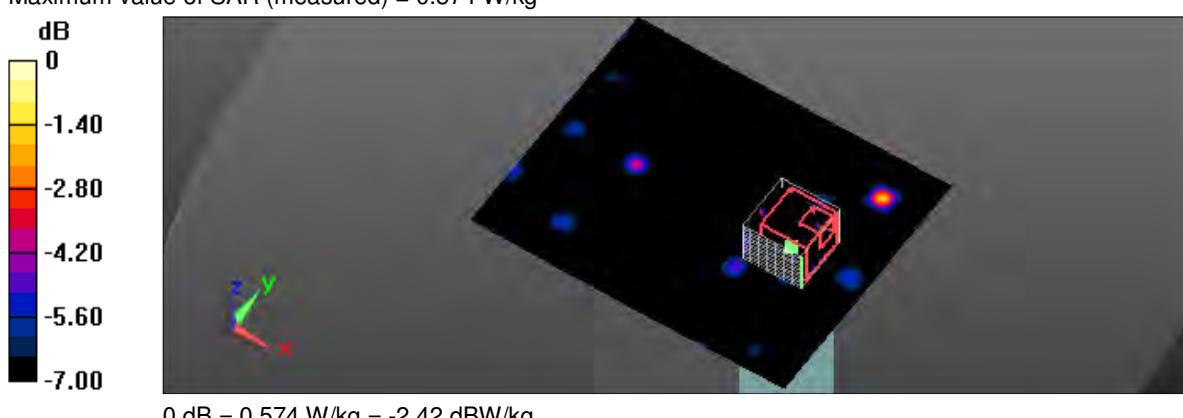

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/4/2016 5:03:39 PM

39_IEEE 802.11ac 5GHz 20MHz CH149_6.5M_End_90 degree_10mm_Antenna 1

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11ac (0); Frequency: 5745 MHz; Duty Cycle: 1:1.9

Medium parameters used (interpolated): $f = 5745 \text{ MHz}$; $\sigma = 6.032 \text{ S/m}$; $\epsilon_r = 47.484$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x191x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 1.06 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.778 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 2.38 W/kg

SAR(1 g) = 0.594 W/kg; SAR(10 g) = 0.300 W/kg

Maximum value of SAR (measured) = 0.957 W/kg

Flat/Zoom Scan (8x8x12)/Cube 1:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.778 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 2.15 W/kg

SAR(1 g) = 0.473 W/kg; SAR(10 g) = 0.255 W/kg

Maximum value of SAR (measured) = 0.719 W/kg

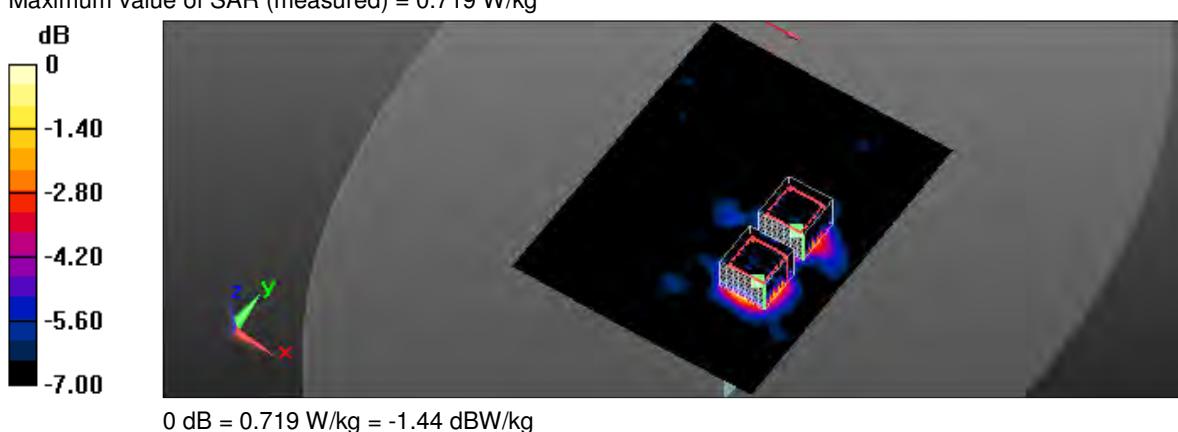

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/9/2016 4:12:36 PM

40_IEEE 802.11ac 5GHz 20MHz CH149_6.5M_Bottom_90 degree_5mm_Antenna 1

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11ac (0); Frequency: 5745 MHz; Duty Cycle: 1:1.9

Medium parameters used (interpolated): $f = 5745 \text{ MHz}$; $\sigma = 6.032 \text{ S/m}$; $\epsilon_r = 47.484$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x121x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.259 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.461 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.348 W/kg

SAR(1 g) = 0.177 W/kg; SAR(10 g) = 0.160 W/kg

Maximum value of SAR (measured) = 0.309 W/kg

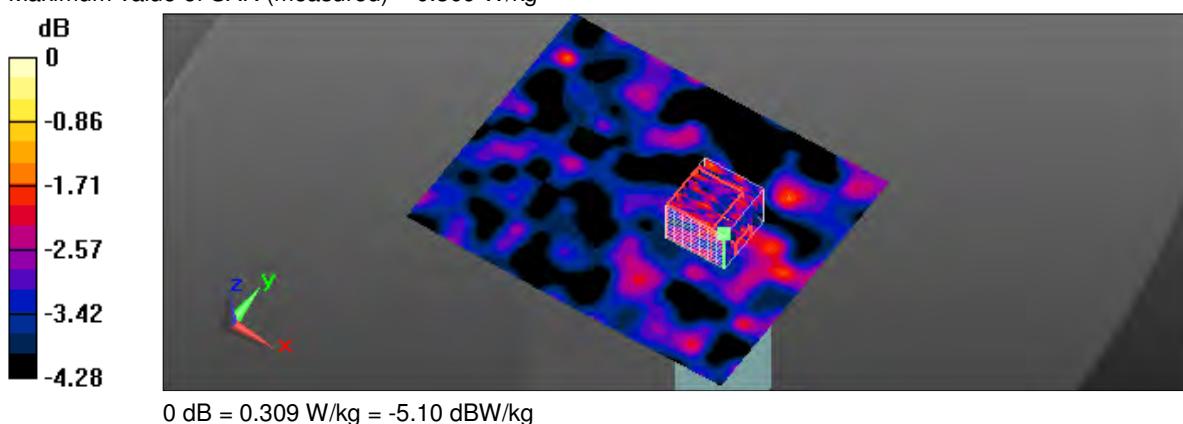

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/4/2016 6:41:18 PM

41_IEEE 802.11ac 5GHz 40MHz CH54_13.5M_End_90 degree_10mm_Antenna 1

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11ac (0); Frequency: 5270 MHz; Duty Cycle: 1:2.23

Medium parameters used: $f = 5270 \text{ MHz}$; $\sigma = 5.348 \text{ S/m}$; $\epsilon_r = 48.523$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.61, 4.61, 4.61); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x191x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 1.13 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 6.284 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 2.22 W/kg

SAR(1 g) = 0.654 W/kg; SAR(10 g) = 0.320 W/kg

Maximum value of SAR (measured) = 1.08 W/kg

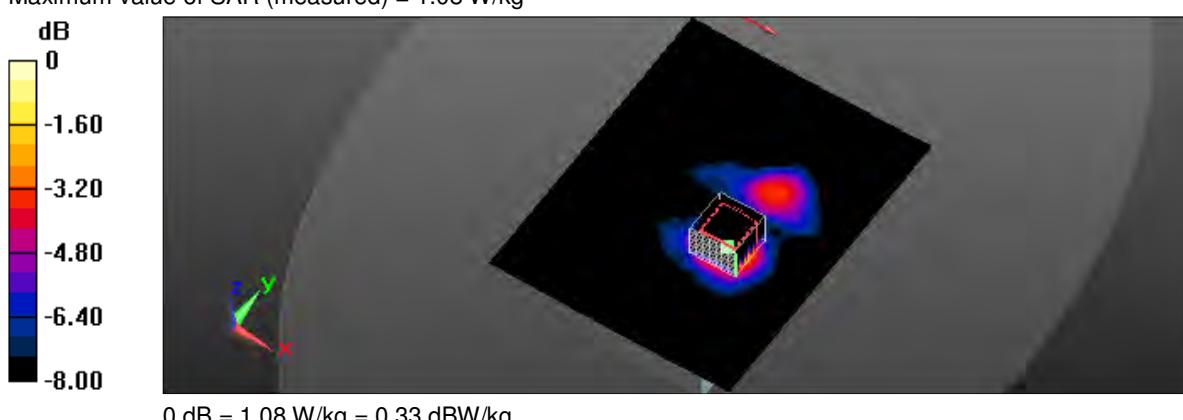

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/9/2016 5:18:28 PM

42_IEEE 802.11ac 5GHz 40MHz CH54_13.5M_Bottom_90 degree_5mm_Antenna 1

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11ac (0); Frequency: 5270 MHz; Duty Cycle: 1:2.23

Medium parameters used: $f = 5270 \text{ MHz}$; $\sigma = 5.348 \text{ S/m}$; $\epsilon_r = 48.523$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.61, 4.61, 4.61); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x121x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.615 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 4.587 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.435 W/kg

SAR(1 g) = 0.148 W/kg; SAR(10 g) = 0.138 W/kg

Maximum value of SAR (measured) = 0.281 W/kg

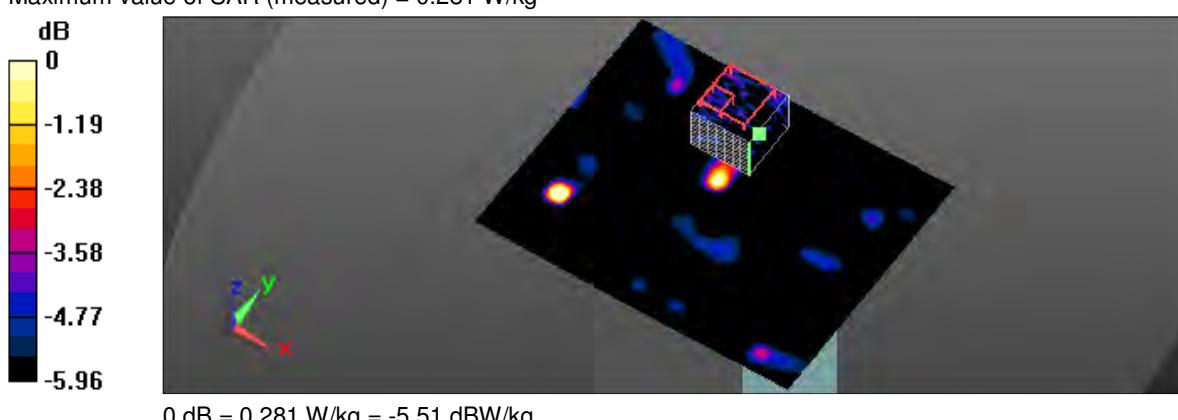

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/4/2016 8:19:46 PM

43_IEEE 802.11ac 5GHz 40MHz CH102_13.5M_End_90 degree_10mm_Antenna 1

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11ac (0); Frequency: 5510 MHz; Duty Cycle: 1:2.23

Medium parameters used: $f = 5510 \text{ MHz}$; $\sigma = 5.699 \text{ S/m}$; $\epsilon_r = 48.029$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.31, 4.31, 4.31); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x191x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.894 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.930 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.68 W/kg

SAR(1 g) = 0.514 W/kg; SAR(10 g) = 0.277 W/kg

Maximum value of SAR (measured) = 0.839 W/kg

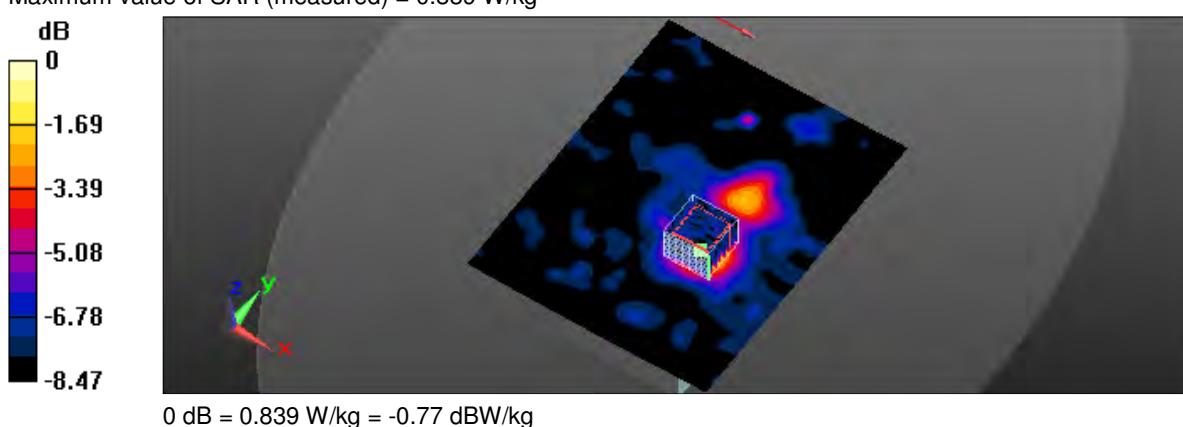

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/9/2016 6:51:10 PM

44_IEEE 802.11ac 5GHz 40MHz CH102_13.5M_Bottom_90 degree_5mm_Antenna 1

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11ac (0); Frequency: 5510 MHz; Duty Cycle: 1:2.23

Medium parameters used: $f = 5510 \text{ MHz}$; $\sigma = 5.699 \text{ S/m}$; $\epsilon_r = 48.029$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.31, 4.31, 4.31); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x121x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.645 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.763 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.451 W/kg

SAR(1 g) = 0.179 W/kg; SAR(10 g) = 0.163 W/kg

Maximum value of SAR (measured) = 0.433 W/kg

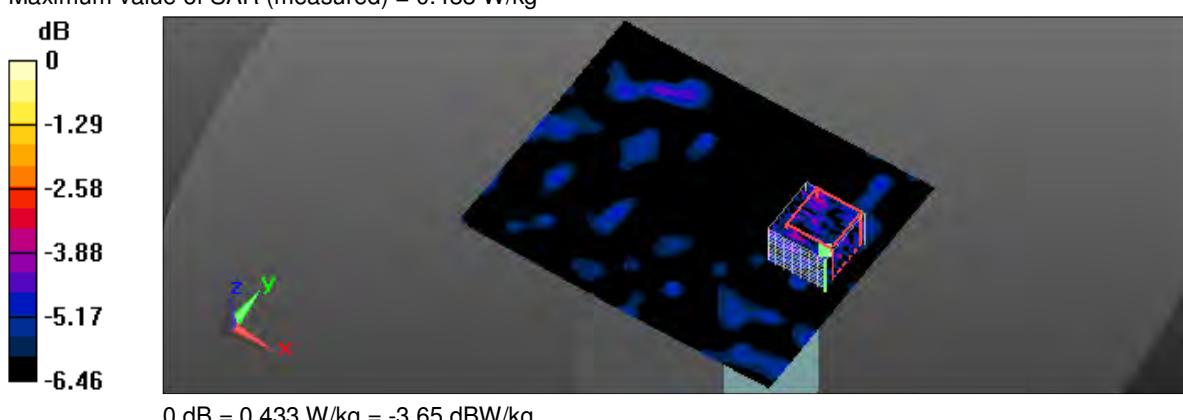

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/4/2016 9:11:53 PM

45_IEEE 802.11ac 5GHz 40MHz CH151_13.5M_End_90 degree_10mm_Antenna 1

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11ac (0); Frequency: 5755 MHz; Duty Cycle: 1:2.23

Medium parameters used (interpolated): $f = 5755 \text{ MHz}$; $\sigma = 6.041 \text{ S/m}$; $\epsilon_r = 47.438$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x191x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.878 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.453 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.79 W/kg

SAR(1 g) = 0.495 W/kg; SAR(10 g) = 0.271 W/kg

Maximum value of SAR (measured) = 0.805 W/kg

Flat/Zoom Scan (8x8x12)/Cube 1:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.453 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.411 W/kg; SAR(10 g) = 0.241 W/kg

Maximum value of SAR (measured) = 0.636 W/kg

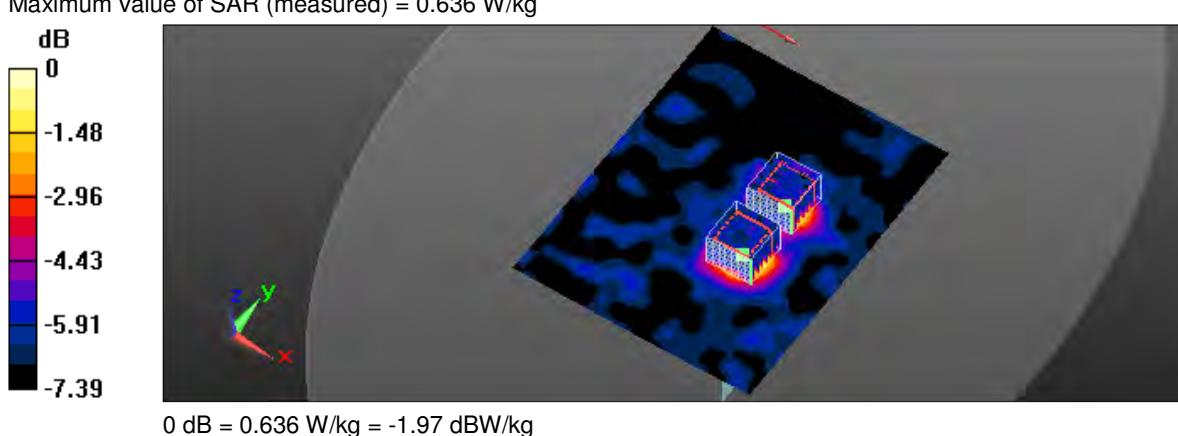

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/9/2016 8:22:33 PM

46_IEEE 802.11ac 5GHz 40MHz CH151_13.5M_Bottom_90 degree_5mm_Antenna 1

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11ac (0); Frequency: 5755 MHz; Duty Cycle: 1:2.23

Medium parameters used (interpolated): $f = 5755 \text{ MHz}$; $\sigma = 6.041 \text{ S/m}$; $\epsilon_r = 47.438$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x121x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.242 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.466 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.646 W/kg

SAR(1 g) = 0.189 W/kg; SAR(10 g) = 0.172 W/kg

Maximum value of SAR (measured) = 0.646 W/kg

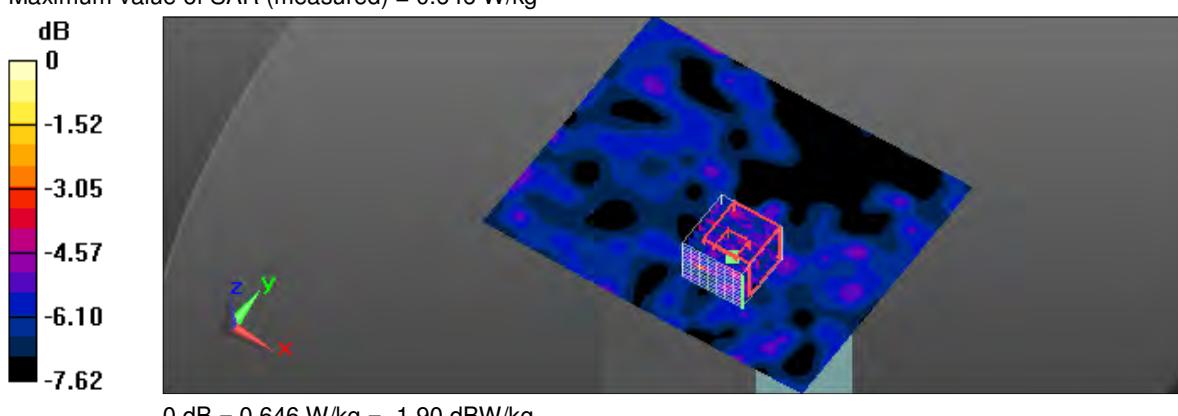

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/4/2016 7:30:19 PM

47_IEEE 802.11ac 5GHz 80MHz CH42_29.3M_End_90 degree_10mm_Antenna 1

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11ac (0); Frequency: 5210 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 5210 \text{ MHz}$; $\sigma = 5.253 \text{ S/m}$; $\epsilon_r = 48.745$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x191x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.610 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.484 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.66 W/kg

SAR(1 g) = 0.378 W/kg; SAR(10 g) = 0.219 W/kg

Maximum value of SAR (measured) = 0.591 W/kg

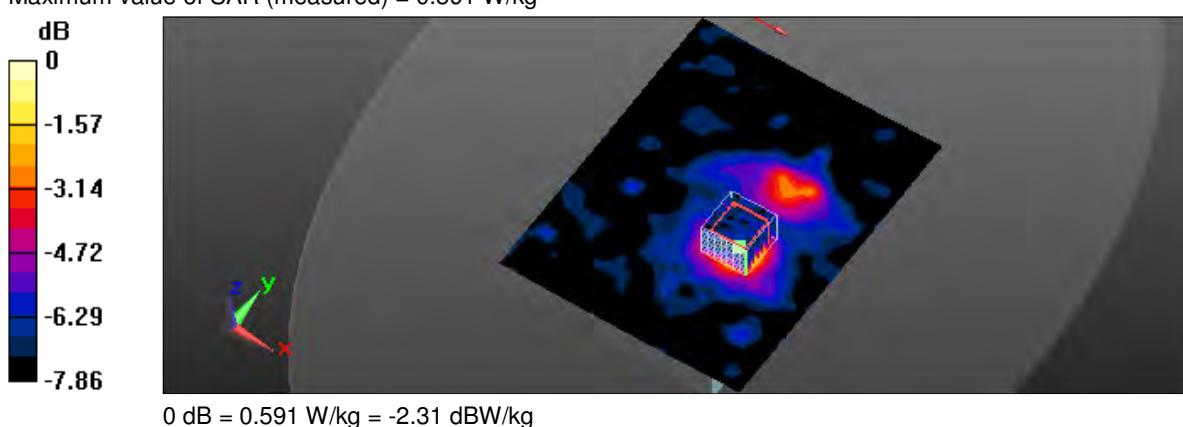

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/9/2016 9:55:07 PM

48_IEEE 802.11ac 5GHz 80MHz CH42_29.3M_Bottom_90 degree_5mm_Antenna 1

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11ac (0); Frequency: 5210 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 5210 \text{ MHz}$; $\sigma = 5.253 \text{ S/m}$; $\epsilon_r = 48.745$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.81, 4.81, 4.81); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x121x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.171 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.344 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.545 W/kg

SAR(1 g) = 0.162 W/kg; SAR(10 g) = 0.144 W/kg

Maximum value of SAR (measured) = 0.545 W/kg

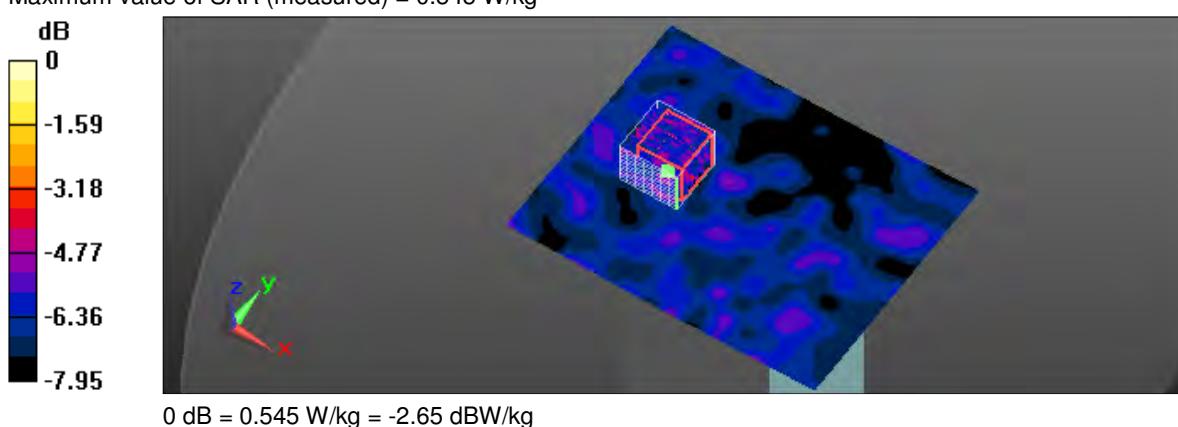

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/7/2016 1:04:46 PM

49_IEEE 802.11ac 5GHz 80MHz CH122_29.3M_End_90 degree_10mm_Antenna 1

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11ac (0); Frequency: 5610 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 5610 \text{ MHz}$; $\sigma = 5.848 \text{ S/m}$; $\epsilon_r = 47.851$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.21, 4.21, 4.21); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x191x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 1.20 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.996 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 2.30 W/kg

SAR(1 g) = 0.691 W/kg; SAR(10 g) = 0.335 W/kg

Maximum value of SAR (measured) = 1.22 W/kg

Flat/Zoom Scan (8x8x12)/Cube 1:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.996 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.491 W/kg; SAR(10 g) = 0.270 W/kg

Maximum value of SAR (measured) = 0.790 W/kg

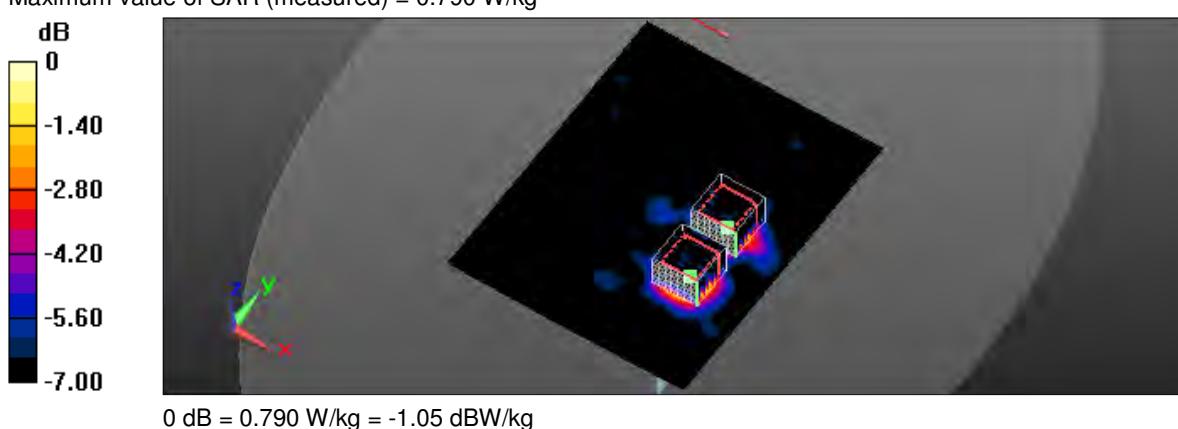

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/10/2016 1:08:57 AM

50_IIEEE 802.11ac 5GHz 80MHz CH122_29.3M_Bottom_90 degree_5mm_Antenna 1

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11ac (0); Frequency: 5610 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 5610 \text{ MHz}$; $\sigma = 5.848 \text{ S/m}$; $\epsilon_r = 47.851$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.21, 4.21, 4.21); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x121x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.239 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.026 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.898 W/kg

SAR(1 g) = 0.229 W/kg; SAR(10 g) = 0.205 W/kg

Maximum value of SAR (measured) = 0.898 W/kg

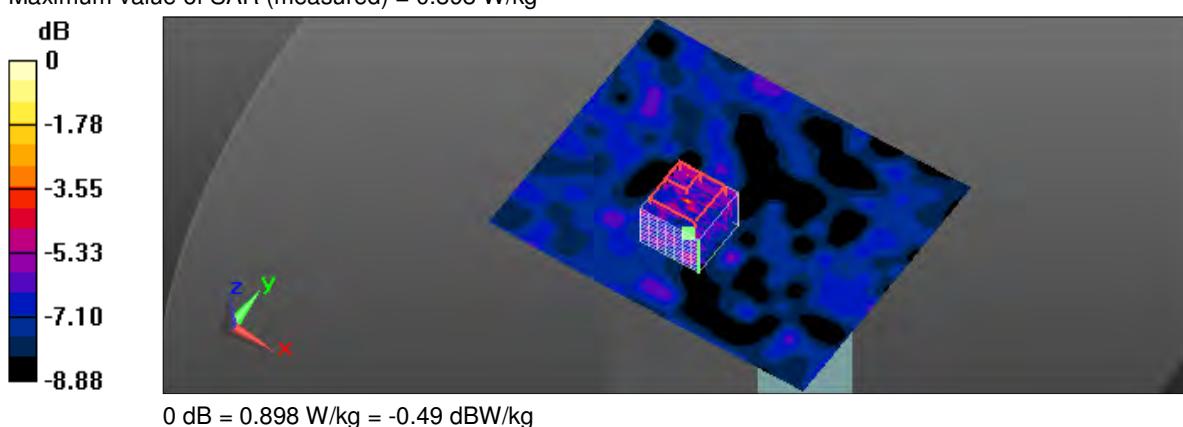

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/7/2016 2:14:34 PM

51_IEEE 802.11ac 5GHz 80MHz CH155_29.3M_End_90 degree_10mm_Antenna 1

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11ac (0); Frequency: 5775 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 5775 \text{ MHz}$; $\sigma = 6.072 \text{ S/m}$; $\epsilon_r = 47.337$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x191x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.929 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.088 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 2.12 W/kg

SAR(1 g) = 0.544 W/kg; SAR(10 g) = 0.282 W/kg

Maximum value of SAR (measured) = 0.865 W/kg

Flat/Zoom Scan (8x8x12)/Cube 1:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.088 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 2.83 W/kg

SAR(1 g) = 0.389 W/kg; SAR(10 g) = 0.230 W/kg

Maximum value of SAR (measured) = 0.603 W/kg

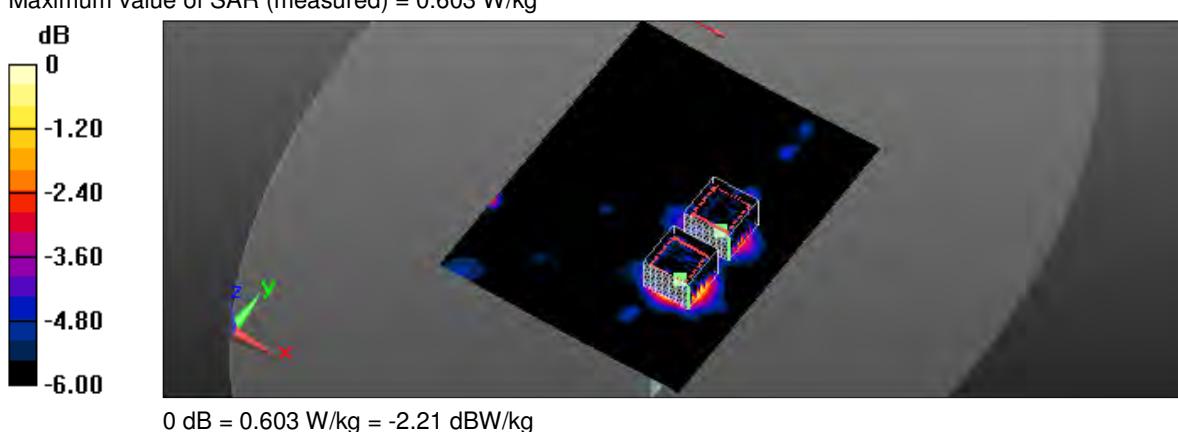

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 11/10/2016 9:25:32 AM

52_IEEE 802.11ac 5GHz 80MHz CH155_29.3M_Bottom_90 degree_5mm_Antenna 1

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11ac (0); Frequency: 5775 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 5775 \text{ MHz}$; $\sigma = 6.072 \text{ S/m}$; $\epsilon_r = 47.337$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x121x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 1.18 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 4.639 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.137 W/kg; SAR(10 g) = 0.120 W/kg

Maximum value of SAR (measured) = 0.763 W/kg

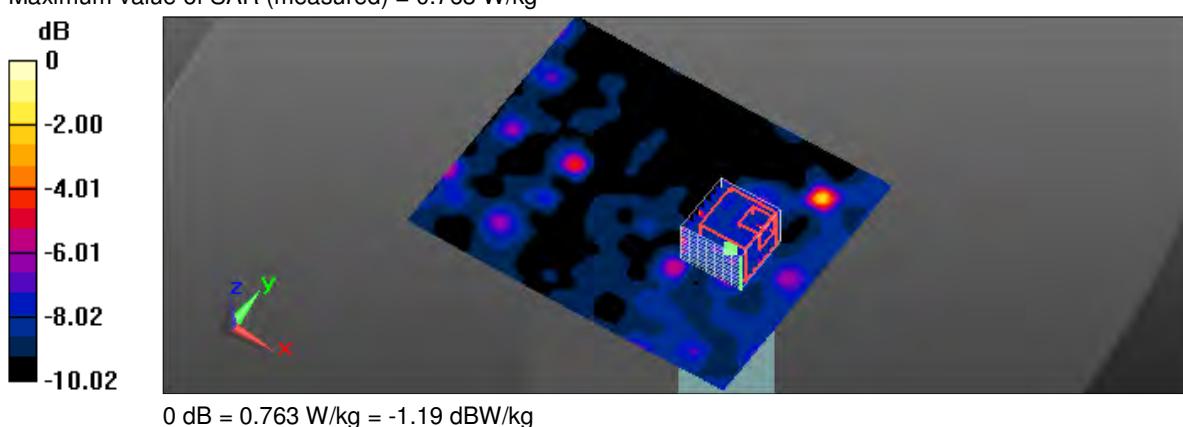

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 12/14/2016 11:38:46 AM

55_IEEE 802.11n 2.4GHz 20MHz CH6_13M_End_90 degree_10mm_MIMO

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11n(2.4GHz) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.953 \text{ S/m}$; $\epsilon_r = 52.484$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.3, 7.3, 7.3); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x191x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.999 W/kg

Flat/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.202 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.839 W/kg; SAR(10 g) = 0.519 W/kg

Maximum value of SAR (measured) = 1.16 W/kg

Flat/Zoom Scan (7x7x7)/Cube 1:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.202 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.759 W/kg; SAR(10 g) = 0.477 W/kg

Maximum value of SAR (measured) = 1.00 W/kg

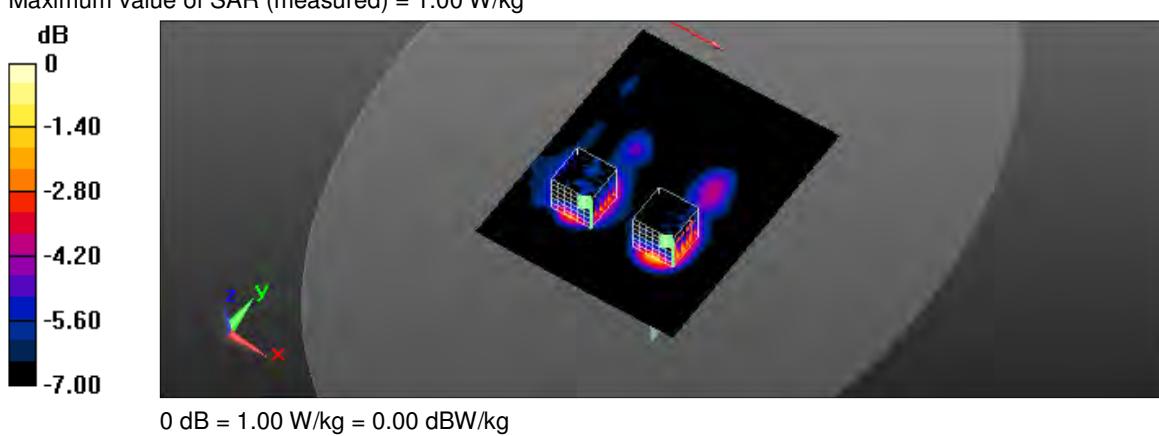

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 12/14/2016 9:12:43 AM

54_IEEE 802.11ac 5GHz 80MHz CH155_58.6M_End_90 degree_10mm_MIMO

DUT: Archer T4UHP; Type: AC1300 High Power Wireless Dual Band USB Adapter; FCC ID: TE7T4UHP

Communication System: UID 0, IEEE 802.11ac (0); Frequency: 5775 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 5775 \text{ MHz}$; $\sigma = 6.072 \text{ S/m}$; $\epsilon_r = 47.337$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.33, 4.33, 4.33); Calibrated: 3/9/2016;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 3/2/2016
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1133
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Flat/Area Scan (151x191x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 1.11 W/kg

Flat/Zoom Scan (8x8x12)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 6.180 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 2.27 W/kg

SAR(1 g) = 0.499 W/kg; SAR(10 g) = 0.293 W/kg

Maximum value of SAR (measured) = 1.04 W/kg

Flat/Zoom Scan (8x8x12)/Cube 1:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 6.180 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 2.24 W/kg

SAR(1 g) = 0.350 W/kg; SAR(10 g) = 0.254 W/kg

Maximum value of SAR (measured) = 0.526 W/kg

