
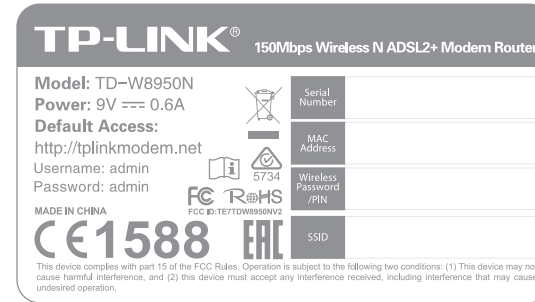


料号:

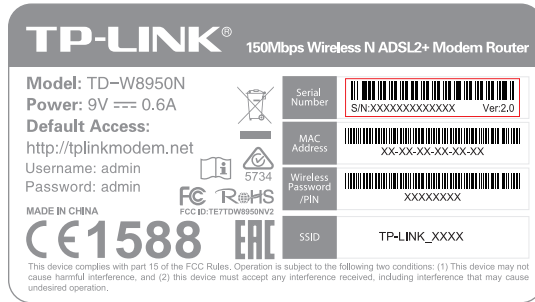

70.7*39.5mm, 3R, 公差: ±0.2mm


注: MAC/PIN/SSID由工厂直接打印;

MAC地址条码由“XXXXXXXXXXXX”生成文本写成“XX-XX-XX-XX-XX-XX”形式;


S/N由工厂打印在23*5mm空白标贴上并黏贴于锡标上。

图示条码均为示意, 具体请以生产实际为准。

文字转曲 (供应商印刷效果图)

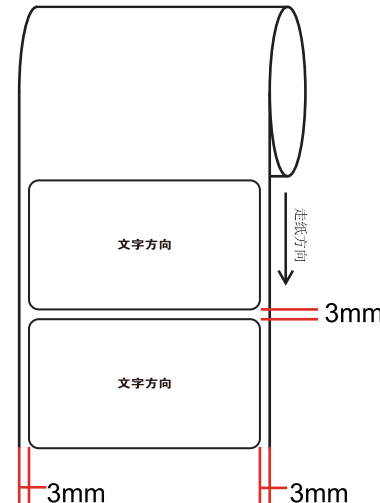

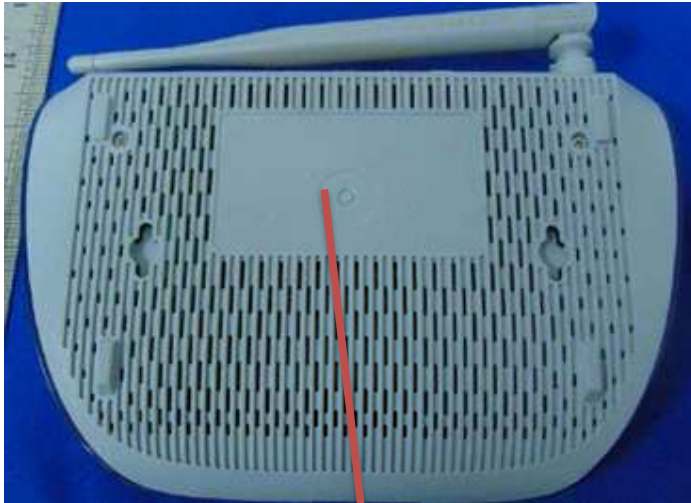

普联技术有限公司 TP-LINK TECHNOLOGIES CO., LTD.			
名称	TD-W8950N(UN)2.0产品规格标贴	logo	白色
版本	A1	底色	白色、pantone cool gray 9c
材质	80g艾利铜版纸+雾膜	文字	白色、pantone cool gray 9c
模具	美E-181	其它	pantone cool gray 2u
机型版本号	TD-W8950N(UN)2.0	审	结构工程师
设计		核	硬件工程师
完成日期			产品工程师
记录与上一版的区别			平面负责人




TP-LINK® 150Mbps Wireless N ADSL2+ Modem Router

Model: TD-W8950N
Power: 9V \approx 0.6A
Default Access:
<http://tplinkmodem.net>
Username: admin
Password: admin

Serial Number:  **SIN:XXXXXXXXXXXXX Ver.2.0**

MAC Address:  **XX-XX-XX-XX-XX-XX**

Wireless Password / PIN:  **XXXXXXXX**

SSID: **TP-LINK_XXXX**

MADE IN CHINA
CE 1588
FCC ID: TE17DW8950N V2
EAC

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

70.7*39.5mm, 3R, 公差: ± 0.2 mm