



A D T

# FCC TEST REPORT (15.247)

**REPORT NO.:** RF130410C18A

**MODEL NO.:** TD-W8980

**FCC ID:** TE7TDW8980V1

**RECEIVED:** Apr. 10, 2013

**TESTED:** Jun. 11 ~ Jul. 26, 2013 (For test mode A)  
Jan. 29 ~ Feb. 05, 2014 (For test mode B)

**ISSUED:** Feb. 07, 2014

**APPLICANT:** TP-LINK TECHNOLOGIES CO., LTD.

**ADDRESS:** Building 24 (floors 1,3,4,5) and 28 (floors1-4)  
Central Science and Technology Park, Shennan  
Rd, Nanshan, Shenzhen, China

**ISSUED BY:** Bureau Veritas Consumer Products Services  
(H.K.) Ltd., Taoyuan Branch

**LAB ADDRESS:** No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist.,  
New Taipei City, Taiwan, R.O.C.

**TEST LOCATION:** No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei  
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



A D T

## TABLE OF CONTENTS

RELEASE CONTROL RECORD .....	5
1. CERTIFICATION.....	6
2. SUMMARY OF TEST RESULTS .....	7
2.1 MEASUREMENT UNCERTAINTY .....	7
3. GENERAL INFORMATION .....	8
3.1 GENERAL DESCRIPTION OF EUT .....	8
3.2 DESCRIPTION OF TEST MODES .....	10
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL .....	11
3.3 DESCRIPTION OF SUPPORT UNITS .....	16
3.3.1 CONFIGURATION OF SYSTEM UNDER TEST .....	17
3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	18
4. TEST TYPES AND RESULTS (FOR 2.4GHz BAND) .....	19
4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT .....	19
4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT .....	19
4.1.2 TEST INSTRUMENTS .....	20
4.1.3 TEST PROCEDURES .....	22
4.1.4 DEVIATION FROM TEST STANDARD.....	22
4.1.5 TEST SETUP.....	23
4.1.6 EUT OPERATING CONDITIONS .....	23
4.1.7 TEST RESULTS .....	24
4.2 CONDUCTED EMISSION MEASUREMENT .....	40
4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	40
4.2.2 TEST INSTRUMENTS.....	40
4.2.3 TEST PROCEDURES .....	41
4.2.4 DEVIATION FROM TEST STANDARD.....	41
4.2.5 TEST SETUP.....	42
4.2.6 EUT OPERATING CONDITIONS .....	42
4.2.7 TEST RESULTS .....	43
4.3 6dB BANDWIDTH MEASUREMENT.....	47
4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT .....	47
4.3.2 TEST SETUP .....	47
4.3.3 TEST INSTRUMENTS.....	47
4.3.4 TEST PROCEDURE.....	47
4.3.5 DEVIATION FROM TEST STANDARD.....	47
4.3.6 EUT OPERATING CONDITIONS .....	47
4.3.7 TEST RESULTS .....	48
4.4 CONDUCTED OUTPUT POWER.....	49
4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT .....	49
4.4.2 TEST SETUP.....	49
4.4.3 TEST INSTRUMENTS.....	49
4.4.4 TEST PROCEDURES .....	49
4.4.5 DEVIATION FROM TEST STANDARD.....	50
4.4.6 EUT OPERATING CONDITIONS .....	50
4.4.7 TEST RESULTS .....	51
4.5 POWER SPECTRAL DENSITY MEASUREMENT .....	53
4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT .....	53
4.5.2 TEST SETUP.....	53
4.5.3 TEST INSTRUMENTS.....	53
4.5.4 TEST PROCEDURE.....	53



4.5.5	DEVIATION FROM TEST STANDARD.....	53
4.5.6	EUT OPERATING CONDITION.....	53
4.5.7	TEST RESULTS .....	54
4.6	CONDUCTED OUT OF BAND EMISSION MEASUREMENT .....	56
4.6.1	LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT .....	56
4.6.2	TEST SETUP.....	56
4.6.3	TEST INSTRUMENTS.....	56
4.6.4	TEST PROCEDURE.....	56
4.6.5	DEVIATION FROM TEST STANDARD.....	57
4.6.6	EUT OPERATING CONDITION.....	57
4.6.7	TEST RESULTS .....	57
5.	TEST TYPES AND RESULTS (FOR 5.0GHz BAND) .....	66
5.1	RADIATED EMISSION MEASUREMENT .....	66
5.1.1	LIMITS OF RADIATED EMISSION MEASUREMENT .....	66
5.1.2	TEST INSTRUMENTS.....	67
5.1.3	TEST PROCEDURES .....	67
5.1.4	DEVIATION FROM TEST STANDARD.....	67
5.1.5	TEST SETUP.....	67
5.1.6	EUT OPERATING CONDITIONS .....	67
5.1.7	TEST RESULTS .....	68
5.2	CONDUCTED EMISSION MEASUREMENT .....	80
5.2.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	80
5.2.2	TEST INSTRUMENTS.....	80
5.2.3	TEST PROCEDURES .....	80
5.2.4	DEVIATION FROM TEST STANDARD.....	80
5.2.5	TEST SETUP.....	80
5.2.6	EUT OPERATING CONDITIONS .....	80
5.2.7	TEST RESULTS .....	81
5.3	6dB BANDWIDTH MEASUREMENT.....	85
5.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT .....	85
5.3.2	TEST SETUP.....	85
5.3.3	TEST INSTRUMENTS.....	85
5.3.4	TEST PROCEDURE.....	85
5.3.5	DEVIATION FROM TEST STANDARD.....	85
5.3.6	EUT OPERATING CONDITIONS .....	85
5.3.7	TEST RESULTS .....	86
5.4	CONDUCTED OUTPUT POWER.....	87
5.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT .....	87
5.4.2	TEST SETUP.....	87
5.4.3	INSTRUMENTS.....	87
5.4.4	TEST PROCEDURES .....	88
5.4.5	DEVIATION FROM TEST STANDARD.....	88
5.4.6	EUT OPERATING CONDITIONS .....	88
5.4.7	TEST RESULTS .....	89
5.5	POWER SPECTRAL DENSITY MEASUREMENT .....	91
5.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT .....	91
5.5.2	TEST SETUP.....	91
5.5.3	TEST INSTRUMENTS.....	91
5.5.4	TEST PROCEDURE.....	91
5.5.5	DEVIATION FROM TEST STANDARD.....	91
5.5.6	EUT OPERATING CONDITION.....	91
5.5.7	TEST RESULTS .....	92
5.6	CONDUCTED OUT OF BAND EMISSION MEASUREMENT .....	94



A D T

5.6.1	LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT .....	94
5.6.2	TEST SETUP .....	94
5.6.3	TEST INSTRUMENTS .....	94
5.6.4	TEST PROCEDURE .....	94
5.6.5	DEVIATION FROM TEST STANDARD .....	94
5.6.6	EUT OPERATING CONDITION .....	94
5.6.7	TEST RESULTS .....	94
6.	PHOTOGRAPHS OF THE TEST CONFIGURATION .....	104
7.	INFORMATION ON THE TESTING LABORATORIES .....	105
8.	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....	106



A D T

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF130410C18A	Original release	Feb. 07, 2014



A D T

## 1. CERTIFICATION

**PRODUCT:** N600 Wireless Dual Band Gigabit ADSL2+ Modem Router

**MODEL NO.:** TD-W8980

**BRAND:** TP-LINK

**APPLICANT:** TP-LINK TECHNOLOGIES CO., LTD.

**TESTED:** Jun. 11 ~ Jul. 26, 2013 (For test mode A)


Jan. 29 ~ Feb. 05, 2014 (For test mode B)

**TEST SAMPLE:** PRODUCTION SAMPLE

**STANDARDS:** **FCC Part 15, Subpart C (Section 15.247)**

ANSI C63.10-2009

The above equipment (model: TD-W8980) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY :**  , **DATE :** Feb. 07, 2014  
Pettie Chen / Senior Specialist

**APPROVED BY :**  , **DATE :** Feb. 07, 2014  
Ken Liu / Senior Manager



## 2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -3.50dB at 0.50547MHz.
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -1.0dB at 2483.50, 11490.00MHz.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connectors are Embedded: Case mounting Weld for PIFA antenna, RP-SMA-Female for Dipole antenna not standard connectors.

### 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.19 dB
	200MHz ~1000MHz	3.21 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .



A D T

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>EUT</b>	N600 Wireless Dual Band Gigabit ADSL2+ Modem Router
<b>MODEL NO.</b>	TD-W8980
<b>POWER SUPPLY</b>	12Vdc (Adapter)
<b>MODULATION TYPE</b>	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
<b>MODULATION TECHNOLOGY</b>	DSSS, OFDM
<b>TRANSFER RATE</b>	802.11b:11.0/ 5.5/ 2.0/ 1.0Mbps 802.11g: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 300.0Mbps
<b>OPERATING FREQUENCY</b>	<b>2.4GHz:</b> 2412 ~ 2462MHz <b>5.0GHz:</b> 5745 ~ 5825MHz
<b>NUMBER OF CHANNEL</b>	<b>2.4GHz:</b> 11 for 802.11b, 802.11g, 802.11n (20MHz) 7 for 802.11n (40MHz) <b>5.0GHz:</b> 5 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz)
<b>OUTPUT POWER</b>	154.813mW for 2412 ~ 2462MHz 548.206mW for 5745 ~ 5825MHz
<b>ANTENNA TYPE</b>	<b>2.4GHz:</b> PIFA antenna with 3.5dBi gain <b>5.0GHz:</b> Dipole antenna with 5.0dBi gain
<b>ANTENNA CONNECTOR</b>	Embedded; Case mounting Weld for PIFA antenna RP-SMA-Female for Dipole antenna
<b>DATA CABLE</b>	NA
<b>I/O PORTS</b>	Refer to user's manual
<b>ACCESSORY DEVICES</b>	Adapter





**NOTE:**

1. This is a supplementary report of RF130410C18. The difference compared with original report is adding an adapter. Therefore, test item of AC Power Conducted Emission and Radiated Emissions test (Frequency range 30MHz to 1GHz) for new adapter were re-tested and the other test data was kept in this report.
2. The EUT provides three completed transmitters and three receivers.

2.4GHz Band	
MODULATION MODE	TX FUNCTION
802.11b	2TX
802.11g	2TX
802.11n (20MHz)	2TX
802.11n (40MHz)	2TX

5.0GHz Band	
MODULATION MODE	TX FUNCTION
802.11a	3TX
802.11n (20MHz)	3TX
802.11n (40MHz)	3TX

3. The EUT consumes power from the following adapters.

Adapter 1	
<b>BRAND:</b>	Huntkey
<b>MODEL:</b>	HKA01812015-2K
<b>INPUT:</b>	100-240Vac, 50/60Hz, 0.5A
<b>OUTPUT:</b>	12Vdc, 1.5A
<b>POWER LINE:</b>	1.5m non-shielded cable without core

Adapter 2	
<b>BRAND:</b>	TP-LINK
<b>MODEL:</b>	T120150-2B1
<b>INPUT:</b>	100-240Vac, 50/60Hz, 0.6A
<b>OUTPUT:</b>	12Vdc, 1.5A
<b>POWER LINE:</b>	1.5m non-shielded cable without core

4. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.



### 3.2 DESCRIPTION OF TEST MODES

#### FOR 2.4GHz:

11 channels are provided for 802.11b, 802.11g and 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

#### FOR 5.0GHz (5745 ~ 5825MHz):

5 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz		

2 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
151	5755MHz	159	5795MHz



### 3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

#### FOR 2.4GHz:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
A	√	√	√	√	Tested with adapter 1
B	-	√	√	-	Tested with adapter 2

Where **RE≥1G**: Radiated Emission above 1GHz      **RE<1G**: Radiated Emission below 1GHz  
**PLC**: Power Line Conducted Emission      **APCM**: Antenna Port Conducted Measurement

**NOTE:**

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.
2. "-": Means no effect.

#### **RADIATED EMISSION TEST (ABOVE 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	7.2
A	802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	15.0

#### **RADIATED EMISSION TEST (BELOW 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B	802.11g	1 to 11	1	OFDM	BPSK	6.0



A D T

### **POWER LINE CONDUCTED EMISSION TEST:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B	802.11g	1 to 11	1	OFDM	BPSK	6.0

### **BANDEDGE MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
A	802.11n (20MHz)	1 to 11	1, 11	OFDM	BPSK	7.2
A	802.11n (40MHz)	3 to 9	3, 9	OFDM	BPSK	15.0

### **ANTENNA PORT CONDUCTED MEASUREMENT:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	7.2
A	802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	15.0



A D T

**TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE $\geq$ 1G	25deg. C, 65%RH	120Vac, 60Hz	Alan Wu
RE $<$ 1G	25deg. C, 70%RH 25deg. C, 65%RH	120Vac, 60Hz	Alan Wu Ted Chang
PLC	24deg. C, 64%RH 25deg. C, 68%RH	120Vac, 60Hz	Match Tsui Sun Lin
APCM	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui



**FOR 5.0GHz (5745 ~ 5825MHz):**

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
A	√	√	√	√	Tested with adapter 1
B	-	√	√	-	Tested with adapter 2

Where **RE≥1G**: Radiated Emission above 1GHz      **RE<1G**: Radiated Emission below 1GHz  
**PLC**: Power Line Conducted Emission      **APCM**: Antenna Port Conducted Measurement

**NOTE:**

- 1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.
- 2. "-": Means no effect.

**RADIATED EMISSION TEST (ABOVE 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6.0
A	802.11n (20MHz)	149 to 165	149, 157, 165	OFDM	BPSK	7.2
A	802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	15.0

**RADIATED EMISSION TEST (BELOW 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B	802.11a	149 to 165	165	OFDM	BPSK	6.0

**POWER LINE CONDUCTED EMISSION TEST:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B	802.11a	149 to 165	165	OFDM	BPSK	6.0



**BANDEDGE MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	149 to 165	149, 165	OFDM	BPSK	6.0
A	802.11n (20MHz)	149 to 165	149, 165	OFDM	BPSK	7.2
A	802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	15.0

**ANTENNA PORT CONDUCTED MEASUREMENT:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6.0
A	802.11n (20MHz)	149 to 165	149, 157, 165	OFDM	BPSK	7.2
A	802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	15.0

**TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE≥1G	25deg. C, 65%RH	120Vac, 60Hz	Alan Wu
RE<1G	25deg. C, 70%RH	120Vac, 60Hz	Alan Wu
	25deg. C, 65%RH		Ted Chang
PLC	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui
	25deg. C, 68%RH		Sun Lin
APCM	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui



A D T

### 3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	USB Flash Drive	Transcend	V85	538455 4490	NA
2	USB Flash Drive	Transcend	V85	569992-8209	NA
3	Notebook	DELL	E5410	1HC2XM1	FCC DoC Approved
4	Notebook	DELL	E5420	BPQ7MQ1	FCC DoC Approved


NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	NA
3	10m RJ45 cable
4	10m RJ45 cable

**NOTE:**

1. All power cords of the above support units are non-shielded (1.8m).
2. Item 3, 4 acted as communication partners to transfer data.



### 3.3.1 CONFIGURATION OF SYSTEM UNDER TEST

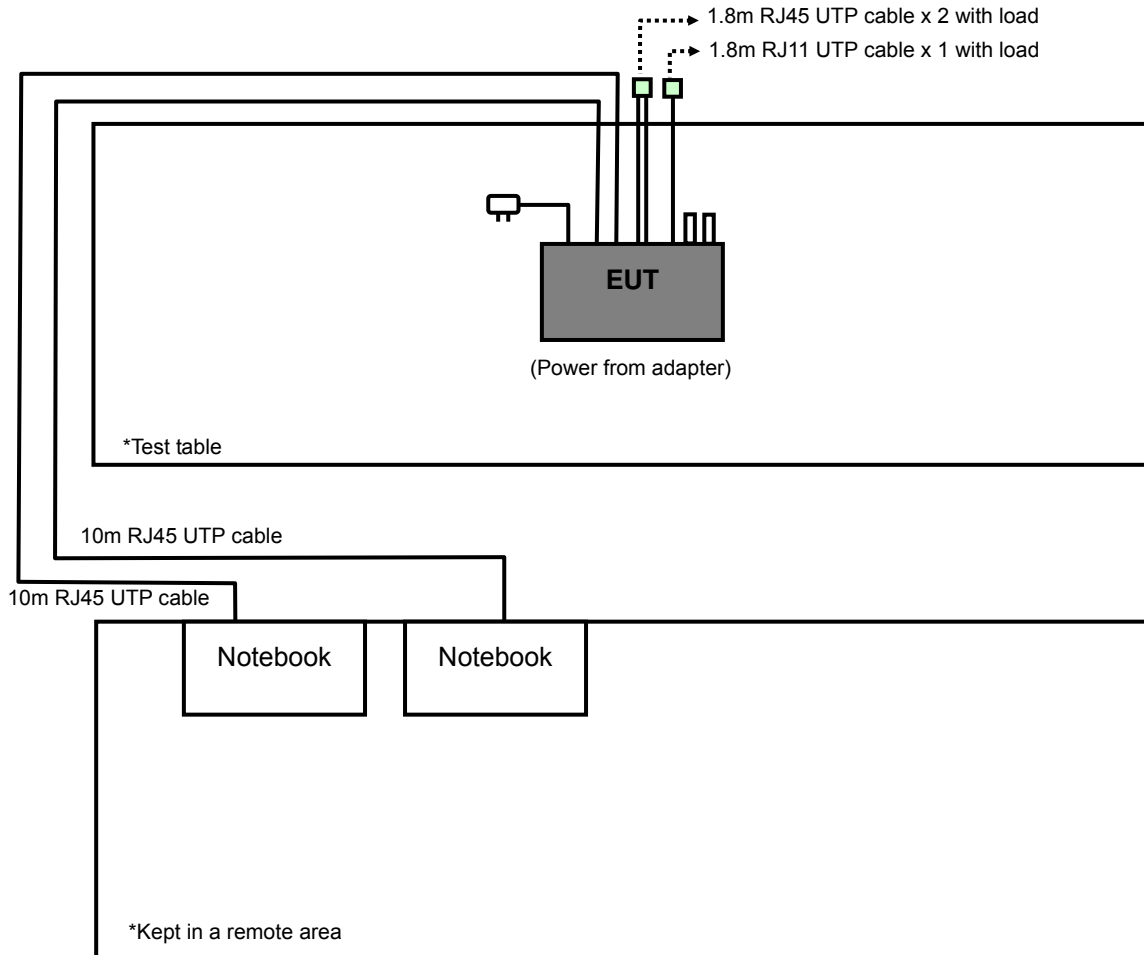



A D T

### 3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C (15.247)**

**558074 D01 DTS Meas Guidance v03r01**

**662911 D01 Multiple Transmitter Output v02**

**ANSI C63.10-2009**

All test items have been performed and recorded as per the above standards.

**NOTE:** The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



## 4. TEST TYPES AND RESULTS (FOR 2.4GHz BAND)

### 4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

#### 4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

#### 4.1.2 TEST INSTRUMENTS

For tested date: Jun. 11 ~ Jul. 26, 2013

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCI	100424	Aug. 21, 2012	Aug. 20, 2013
Spectrum Analyzer ROHDE & SCHWARZ	FSU 43	100115	Oct. 25, 2012	Oct. 24, 2013
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Mar. 25, 2013	Mar. 24, 2014
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-404	Dec. 22, 2012	Dec. 21, 2013
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170243	Dec. 25, 2012	Dec. 24, 2013
Loop Antenna	HFH2-Z2	100070	Jan. 31, 2012	Jan. 30, 2014
Preamplifier Agilent	8449B	3008A01961	Oct. 25, 2012	Oct. 24, 2013
Preamplifier Agilent	8447D	2944A10738	Oct. 23, 2012	Oct. 22, 2013
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	309220/4	Aug. 28, 2012	Aug. 27, 2013
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250724/4	Aug. 28, 2012	Aug. 27, 2013
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	295012/4	Aug. 28, 2012	Aug. 27, 2013
Software BV ADT	ADT_Radiated_ V7.6.15.9.4	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	019303	NA	NA
Turn Table BV ADT	TT100.	TT93021704	NA	NA
Turn Table Controller BV ADT	SC100.	SC93021704	NA	NA
26GHz ~ 40GHz Amplifier	EM26400	815221	Oct. 25, 2012	Oct. 24, 2013
High Speed Peak Power Meter	ML2495A	0824012	Aug. 22, 2012	Aug. 21, 2013
Power Sensor	MA2411B	0738171	Jul. 30, 2012	Jul. 29, 2013

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The calibration interval of the loop antenna is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
  3. The test was performed in HwaYa Chamber 4.
  4. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
  5. The FCC Site Registration No. is 460141.
  6. The IC Site Registration No. is IC7450F-4.



A D T

For tested date: Jan. 29, 2014

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCI	100424	Sep. 09, 2013	Sep. 08, 2014
Spectrum Analyzer ROHDE & SCHWARZ	FSU 43	100115	Dec. 18, 2013	Dec. 17, 2014
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Mar. 25, 2013	Mar. 24, 2014
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-404	Jan. 05, 2014	Jan. 04, 2015
HORN Antenna SCHWARZBECK	BBHA 9170	148	Jul. 15, 2013	Jul. 14, 2014
Loop Antenna	HFH2-Z2	100070	Jan. 31, 2012	Jan. 30, 2014
Preamplifier Agilent	8449B	3008A01961	Oct. 28, 2013	Oct. 27, 2014
Preamplifier Agilent	8447D	2944A10738	Oct. 18, 2013	Oct. 17, 2014
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	309220/4	Aug. 26, 2013	Aug. 25, 2014
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250724/4	Aug. 26, 2013	Aug. 25, 2014
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	295012/4	Aug. 26, 2013	Aug. 25, 2014
Software BV ADT	ADT_Radiated_ V7.6.15.9.4	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	019303	NA	NA
Turn Table BV ADT	TT100.	TT93021704	NA	NA
Turn Table Controller BV ADT	SC100.	SC93021704	NA	NA
26GHz ~ 40GHz Amplifier	EM26400	815221	Oct. 18, 2013	Oct. 17, 2014

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The calibration interval of the loop antenna is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
  3. The test was performed in HwaYa Chamber 4.
  4. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
  5. The FCC Site Registration No. is 460141.
  6. The IC Site Registration No. is IC7450F-4.



A D T

#### 4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz (Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.1.5 TEST SETUP

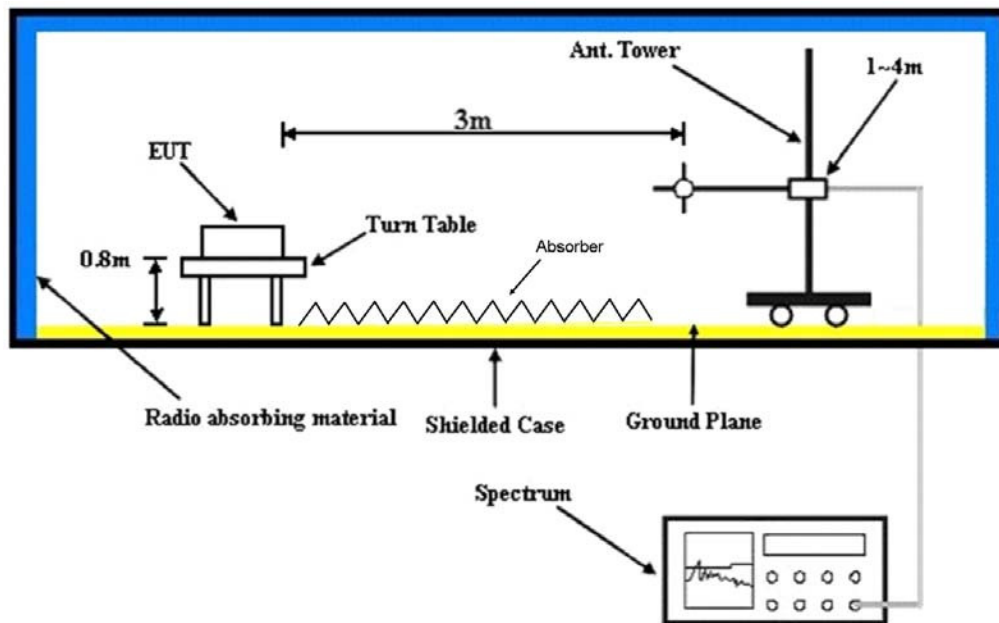

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT OPERATING CONDITIONS

- Placed the EUT on the testing table.
- Prepared notebooks to act as communication partners and placed them outside of testing area.
- The communication partners connected with EUT via RJ45 cables and ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- The communication partners sent data to EUT by command "PING".
- The necessary accessories enabled the system in full functions.



A D T

### 4.1.7 TEST RESULTS

#### ABOVE 1GHz DATA :

#### 802.11b

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 71%RH	TESTED BY	Alan Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	52.9 PK	74.0	-21.1	1.31 H	265	22.10	30.80
2	2390.00	41.6 AV	54.0	-12.4	1.31 H	265	10.80	30.80
3	*2412.00	103.1 PK			1.34 H	261	72.20	30.90
4	*2412.00	99.6 AV			1.34 H	261	68.70	30.90
5	4824.00	52.0 PK	74.0	-22.0	1.00 H	299	15.00	37.00
6	4824.00	48.9 AV	54.0	-5.1	1.00 H	299	11.90	37.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	53.6 PK	74.0	-20.4	1.00 V	357	22.80	30.80
2	2390.00	42.4 AV	54.0	-11.6	1.00 V	357	11.60	30.80
3	*2412.00	108.2 PK			1.00 V	351	77.30	30.90
4	*2412.00	104.7 AV			1.00 V	351	73.80	30.90
5	4824.00	55.1 PK	74.0	-18.9	1.00 V	19	18.10	37.00
6	4824.00	52.6 AV	54.0	-1.4	1.00 V	19	15.60	37.00

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.





A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 71%RH	TESTED BY	Alan Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	102.6 PK			1.34 H	261	71.60	31.00
2	*2437.00	98.9 AV			1.34 H	261	67.90	31.00
3	4874.00	52.5 PK	74.0	-21.5	1.00 H	295	15.40	37.10
4	4874.00	49.7 AV	54.0	-4.3	1.00 H	295	12.60	37.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	109.5 PK			1.21 V	319	78.50	31.00
2	*2437.00	106.1 AV			1.21 V	319	75.10	31.00
3	4874.00	56.3 PK	74.0	-17.7	1.00 V	19	19.20	37.10
4	4874.00	52.9 AV	54.0	-1.1	1.00 V	19	15.80	37.10

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 71%RH	TESTED BY	Alan Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	101.0 PK			1.34 H	264	69.90	31.10
2	*2462.00	97.4 AV			1.34 H	264	66.30	31.10
3	2488.00	55.0 PK	74.0	-19.0	1.38 H	261	23.80	31.20
4	2488.00	45.3 AV	54.0	-8.7	1.38 H	261	14.10	31.20
5	4924.00	51.7 PK	74.0	-22.3	1.00 H	297	14.50	37.20
6	4924.00	48.6 AV	54.0	-5.4	1.00 H	297	11.40	37.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	107.9 PK			1.00 V	322	76.80	31.10
2	*2462.00	104.6 AV			1.00 V	322	73.50	31.10
3	2488.00	55.5 PK	74.0	-18.5	1.00 V	326	24.30	31.20
4	2488.00	46.7 AV	54.0	-7.3	1.00 V	326	15.50	31.20
5	4924.00	55.7 PK	74.0	-18.3	1.00 V	12	18.50	37.20
6	4924.00	52.8 AV	54.0	-1.2	1.00 V	12	15.60	37.20

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.



A D T

802.11g

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 71%RH	TESTED BY	Alan Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.3 PK	74.0	-8.7	1.31 H	267	34.50	30.80
2	2390.00	47.4 AV	54.0	-6.6	1.31 H	267	16.60	30.80
3	*2412.00	102.6 PK			1.36 H	262	71.70	30.90
4	*2412.00	92.9 AV			1.36 H	262	62.00	30.90
5	4824.00	50.3 PK	74.0	-23.7	1.00 H	296	13.30	37.00
6	4824.00	35.8 AV	54.0	-18.2	1.00 H	296	-1.20	37.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.6 PK	74.0	-5.4	1.00 V	6	37.80	30.80
2	2390.00	52.5 AV	54.0	-1.5	1.00 V	6	21.70	30.80
3	*2412.00	108.8 PK			1.00 V	325	77.90	30.90
4	*2412.00	98.7 AV			1.00 V	325	67.80	30.90
5	4824.00	51.2 PK	74.0	-22.8	1.00 V	17	14.20	37.00
6	4824.00	36.3 AV	54.0	-17.7	1.00 V	17	-0.70	37.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 71%RH	TESTED BY	Alan Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	102.7 PK			1.33 H	263	71.70	31.00
2	*2437.00	93.4 AV			1.33 H	263	62.40	31.00
3	4874.00	50.4 PK	74.0	-23.6	1.00 H	291	13.30	37.10
4	4874.00	35.1 AV	54.0	-18.9	1.00 H	291	-2.00	37.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	109.3 PK			1.23 V	320	78.30	31.00
2	*2437.00	99.6 AV			1.23 V	320	68.60	31.00
3	4874.00	51.3 PK	74.0	-22.7	1.00 V	14	14.20	37.10
4	4874.00	36.5 AV	54.0	-17.5	1.00 V	14	-0.60	37.10

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH	TESTED BY	Alan Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	97.2 PK			1.31 H	262	66.10	31.10
2	*2462.00	87.7 AV			1.31 H	262	56.60	31.10
3	2483.50	61.1 PK	74.0	-12.9	1.32 H	266	29.90	31.20
4	2483.50	43.7 AV	54.0	-10.3	1.32 H	266	12.50	31.20
5	4924.00	48.4 PK	74.0	-25.6	1.00 H	298	11.20	37.20
6	4924.00	33.0 AV	54.0	-21.0	1.00 H	298	-4.20	37.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	104.1 PK			1.47 V	322	73.00	31.10
2	*2462.00	94.1 AV			1.47 V	322	63.00	31.10
3	2483.50	68.6 PK	74.0	-5.4	1.51 V	326	37.40	31.20
4	2483.50	52.2 AV	54.0	-1.8	1.51 V	326	21.00	31.20
5	4924.00	49.5 PK	74.0	-24.5	1.00 V	293	12.30	37.20
6	4924.00	34.6 AV	54.0	-19.4	1.00 V	293	-2.60	37.20

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.



A D T

802.11n (20MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH	TESTED BY	Alan Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.1 PK	74.0	-6.9	1.37 H	266	36.30	30.80
2	2390.00	48.9 AV	54.0	-5.1	1.37 H	266	18.10	30.80
3	*2412.00	101.3 PK			1.37 H	263	70.40	30.90
4	*2412.00	91.0 AV			1.37 H	263	60.10	30.90
5	4824.00	50.2 PK	74.0	-23.8	1.00 H	291	13.20	37.00
6	4824.00	35.0 AV	54.0	-19.0	1.00 H	291	-2.00	37.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	70.6 PK	74.0	-3.4	1.00 V	357	39.80	30.80
2	2390.00	52.5 AV	54.0	-1.5	1.00 V	357	21.70	30.80
3	*2412.00	107.7 PK			1.00 V	357	76.80	30.90
4	*2412.00	97.2 AV			1.00 V	357	66.30	30.90
5	4824.00	51.1 PK	74.0	-22.9	1.00 V	13	14.10	37.00
6	4824.00	35.5 AV	54.0	-18.5	1.00 V	13	-1.50	37.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH	TESTED BY	Alan Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	100.0 PK			1.25 H	240	69.00	31.00
2	*2437.00	90.4 AV			1.25 H	240	59.40	31.00
3	4874.00	50.3 PK	74.0	-23.7	1.00 H	294	13.20	37.10
4	4874.00	35.4 AV	54.0	-18.6	1.00 H	294	-1.70	37.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	108.9 PK			1.22 V	359	77.90	31.00
2	*2437.00	99.2 AV			1.22 V	359	68.20	31.00
3	4874.00	51.2 PK	74.0	-22.8	1.00 V	17	14.10	37.10
4	4874.00	36.0 AV	54.0	-18.0	1.00 V	17	-1.10	37.10

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH	TESTED BY	Alan Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	97.7 PK			1.31 H	262	66.60	31.10
2	*2462.00	87.2 AV			1.31 H	262	56.10	31.10
3	2483.50	59.5 PK	74.0	-14.5	1.34 H	260	28.30	31.20
4	2483.50	44.5 AV	54.0	-9.5	1.34 H	260	13.30	31.20
5	4924.00	48.2 PK	74.0	-25.8	1.00 H	294	11.00	37.20
6	4924.00	32.2 AV	54.0	-21.8	1.00 H	294	-5.00	37.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	104.9 PK			1.47 V	320	73.80	31.10
2	*2462.00	94.9 AV			1.47 V	320	63.80	31.10
3	2483.50	69.6 PK	74.0	-4.4	1.20 V	1	38.40	31.20
4	2483.50	52.6 AV	54.0	-1.4	1.20 V	1	21.40	31.20
5	4924.00	49.3 PK	74.0	-24.7	1.00 V	10	12.10	37.20
6	4924.00	33.9 AV	54.0	-20.1	1.00 V	10	-3.30	37.20

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.





A D T

802.11n (40MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 3	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH	TESTED BY	Alan Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.8 PK	74.0	-9.2	1.32 H	265	34.00	30.80
2	2390.00	46.0 AV	54.0	-8.0	1.32 H	265	15.20	30.80
3	*2422.00	94.8 PK			1.31 H	261	63.90	30.90
4	*2422.00	85.1 AV			1.31 H	261	54.20	30.90
5	4844.00	49.5 PK	74.0	-24.5	1.00 H	297	12.50	37.00
6	4844.00	34.2 AV	54.0	-19.8	1.00 H	297	-2.80	37.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.4 PK	74.0	-4.6	1.00 V	1	38.60	30.80
2	2390.00	52.6 AV	54.0	-1.4	1.00 V	1	21.80	30.80
3	*2422.00	103.0 PK			1.22 V	358	72.10	30.90
4	*2422.00	93.9 AV			1.22 V	358	63.00	30.90
5	4844.00	50.3 PK	74.0	-23.7	1.00 V	16	13.30	37.00
6	4844.00	34.8 AV	54.0	-19.2	1.00 V	16	-2.20	37.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH	TESTED BY	Alan Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	95.9 PK			1.38 H	263	64.90	31.00
2	*2437.00	86.1 AV			1.38 H	263	55.10	31.00
3	2483.50	60.9 PK	74.0	-13.1	1.30 H	268	29.70	31.20
4	2483.50	45.5 AV	54.0	-8.5	1.30 H	268	14.30	31.20
5	4874.00	49.7 PK	74.0	-24.3	1.00 H	298	12.60	37.10
6	4874.00	34.9 AV	54.0	-19.1	1.00 H	298	-2.20	37.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	103.1 PK			1.23 V	359	72.10	31.00
2	*2437.00	93.7 AV			1.23 V	359	62.70	31.00
3	2483.50	68.3 PK	74.0	-5.7	1.27 V	5	37.10	31.20
4	2483.50	52.9 AV	54.0	-1.1	1.27 V	5	21.70	31.20
5	4874.00	50.5 PK	74.0	-23.5	1.00 V	12	13.40	37.10
6	4874.00	35.5 AV	54.0	-18.5	1.00 V	12	-1.60	37.10

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 9	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH	TESTED BY	Alan Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	93.1 PK			1.34 H	264	62.00	31.10
2	*2452.00	83.4 AV			1.34 H	264	52.30	31.10
3	2483.50	58.8 PK	74.0	-15.2	1.38 H	260	27.60	31.20
4	2483.50	44.7 AV	54.0	-9.3	1.38 H	260	13.50	31.20
5	4904.00	47.6 PK	74.0	-26.4	1.00 H	298	10.40	37.20
6	4904.00	31.2 AV	54.0	-22.8	1.00 H	298	-6.00	37.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	100.3 PK			1.19 V	311	69.20	31.10
2	*2452.00	90.5 AV			1.19 V	311	59.40	31.10
3	2483.50	70.9 PK	74.0	-3.1	1.19 V	3	39.70	31.20
4	2483.50	53.0 AV	54.0	-1.0	1.19 V	3	21.80	31.20
5	4904.00	47.7 PK	74.0	-26.3	1.00 V	14	10.50	37.20
6	4904.00	32.9 AV	54.0	-21.1	1.00 V	14	-4.30	37.20

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.



A D T


**BELOW 1GHz WORST-CASE DATA : 802.11g**

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 70%RH	TESTED BY	Alan Wu
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	80.35	27.4 QP	40.0	-12.6	1.99 H	229	45.90	-18.50
2	142.44	34.5 QP	43.5	-9.0	1.99 H	111	49.10	-14.60
3	287.97	39.6 QP	46.0	-6.4	1.24 H	109	52.60	-13.00
4	384.99	40.6 QP	46.0	-5.4	1.00 H	232	51.90	-11.30
5	625.60	30.4 QP	46.0	-15.6	1.49 H	13	37.00	-6.60
6	749.79	31.9 QP	46.0	-14.1	1.99 H	12	36.20	-4.30

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

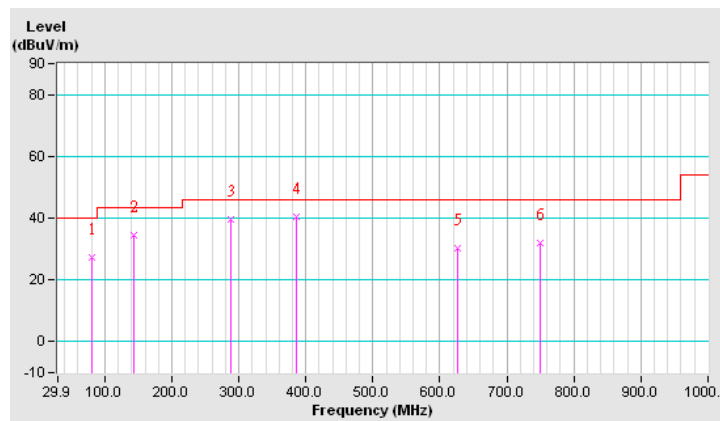




A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 70%RH	TESTED BY	Alan Wu
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	53.18	33.9 QP	40.0	-6.1	1.24 V	258	48.00	-14.10
2	80.35	34.1 QP	40.0	-5.9	1.00 V	30	52.60	-18.50
3	101.69	32.3 QP	43.5	-11.2	1.00 V	142	50.90	-18.60
4	287.97	34.7 QP	46.0	-11.3	1.49 V	178	47.70	-13.00
5	384.99	38.9 QP	46.0	-7.1	1.24 V	145	50.20	-11.30
6	577.09	30.3 QP	46.0	-15.7	1.74 V	86	38.10	-7.80

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

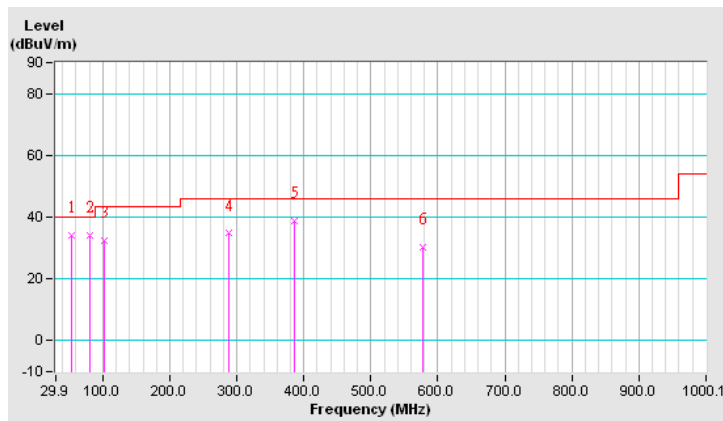




A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	165.80	32.5 QP	43.5	-11.0	1.49 H	97	47.00	-14.50
2	288.02	34.8 QP	46.0	-11.2	1.00 H	84	47.60	-12.80
3	338.46	35.1 QP	46.0	-10.9	1.00 H	341	46.90	-11.80
4	367.56	37.0 QP	46.0	-9.0	1.00 H	153	48.30	-11.30
5	480.08	35.8 QP	46.0	-10.2	1.99 H	66	45.20	-9.40
6	961.20	40.4 QP	54.0	-13.6	1.24 H	72	40.90	-0.50

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

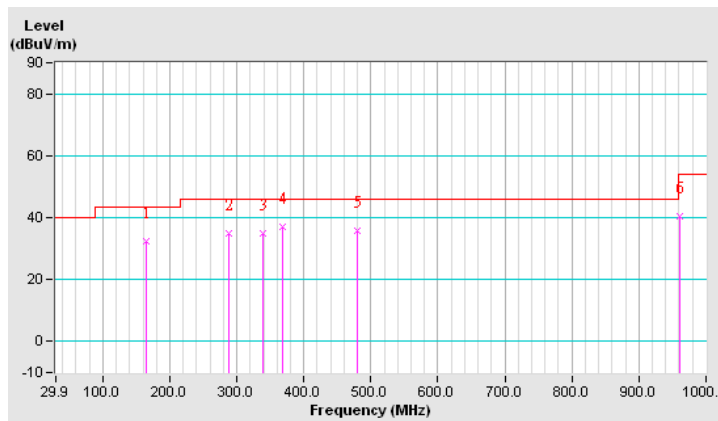




A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	52.92	36.5 QP	40.0	-3.5	1.00 V	13	50.30	-13.80
2	72.68	33.0 QP	40.0	-7.0	1.00 V	181	49.40	-16.40
3	127.00	29.7 QP	43.5	-13.8	1.75 V	11	45.20	-15.50
4	367.56	35.3 QP	46.0	-10.7	1.24 V	165	46.60	-11.30
5	480.08	32.8 QP	46.0	-13.2	1.00 V	112	42.20	-9.40
6	961.20	39.8 QP	54.0	-14.2	1.00 V	133	40.30	-0.50

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

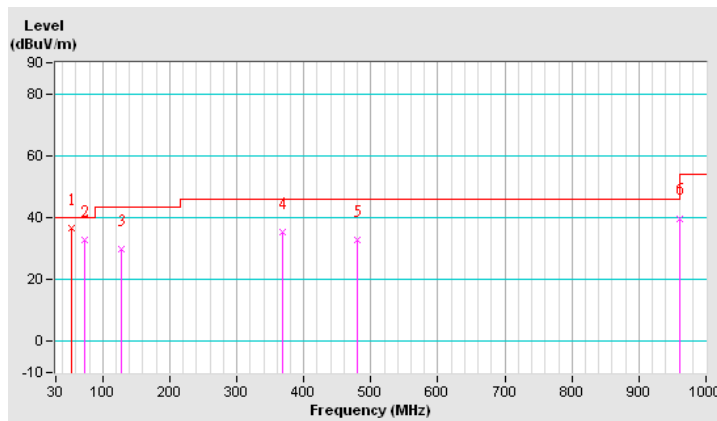



A D T

## 4.2 CONDUCTED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
  3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

### 4.2.2 TEST INSTRUMENTS

For tested date: Jun. 11 ~ Jul. 26, 2013

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100289	Nov. 16, 2012	Nov. 15, 2013
RF signal cable Woken	5D-FB	Cable-HYC01-01	Dec. 28, 2012	Dec. 27, 2013
SCHWARZBECK (Peripheral)	NNBL 8226-2	8226-142	Jun. 27, 2013	Jun. 26, 2014
LISN ROHDE & SCHWARZ (EUT)	ESH3-Z5	835239/001	Feb. 04, 2013	Feb. 03, 2014
Software ADT	BV ADT_Cond_ V7.3.7.3	NA	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in HwaYa Shielded Room 1.
  3. The VCCI Site Registration No. is C-2040.





A D T

For tested date: Feb. 05, 2014

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100289	Nov. 29, 2013	Nov. 28, 2014
RF signal cable Woken	5D-FB	Cable-HYC01-01	Dec. 27, 2013	Dec. 26, 2014
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Jul. 17, 2013	Jul. 16, 2014
LISN ROHDE & SCHWARZ (EUT)	ESH3-Z5	100312	Jul. 08, 2013	Jul. 07, 2014
Software ADT	BV ADT_Cond_ V7.3.7.3	NA	NA	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. The test was performed in HwaYa Shielded Room 1.  
3. The VCCI Site Registration No. is C-2040.

#### 4.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**NOTE:** All modes of operation were investigated and the worst-case emissions are reported.

#### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.2.5 TEST SETUP

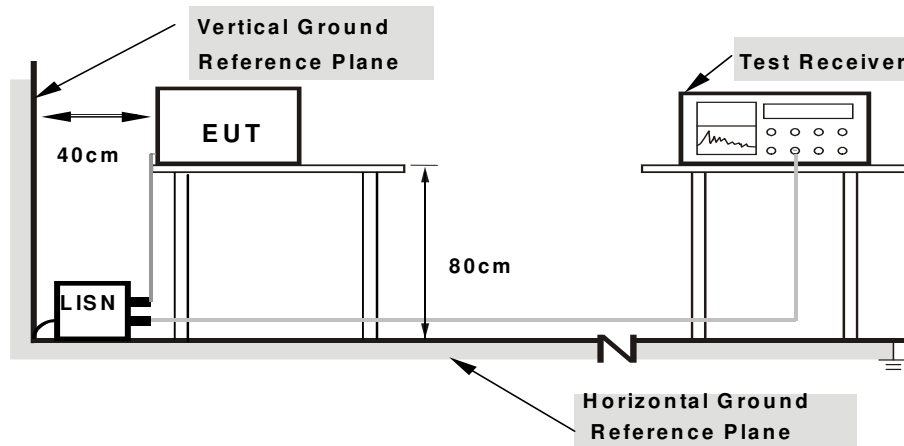

- Note:**
1. Support units were connected to second LISN.
  2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.



A D T


### 4.2.7 TEST RESULTS

#### CONDUCTED WORST-CASE DATA : 802.11g

PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18906	0.16	48.34	37.94	48.50	38.10	64.08	54.08	-15.58	-15.98
2	0.49766	0.23	48.80	40.10	49.03	40.33	56.04	46.04	-7.01	-5.71
3	0.79453	0.24	37.50	27.41	37.74	27.65	56.00	46.00	-18.26	-18.35
4	2.78516	0.33	35.89	28.25	36.22	28.58	56.00	46.00	-19.78	-17.42
5	6.69922	0.54	33.62	27.31	34.16	27.85	60.00	50.00	-25.84	-22.15
6	22.54297	1.36	30.78	24.28	32.14	25.64	60.00	50.00	-27.86	-24.36

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. The emission levels of other frequencies were very low against the limit.
  3. Margin value = Emission level - Limit value
  4. Correction factor = Insertion loss + Cable loss
  5. Emission Level = Correction Factor + Reading Value.

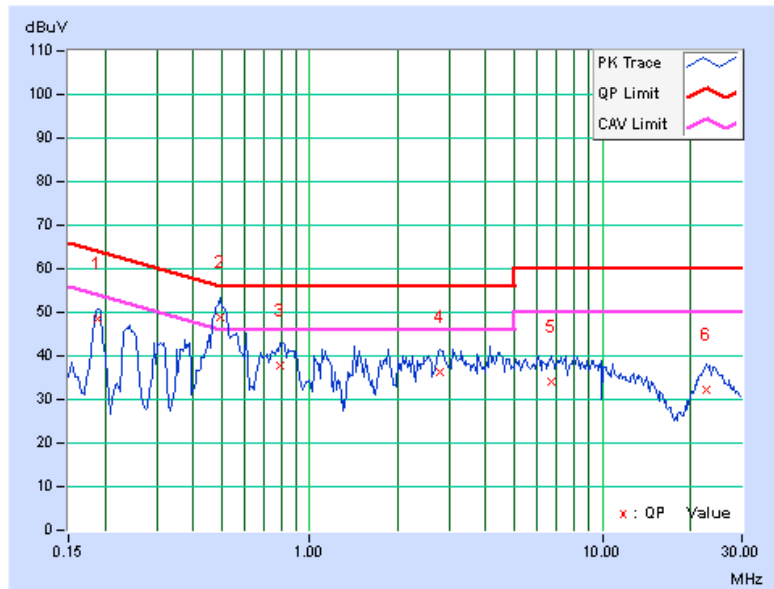




A D T

PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19279	0.17	44.46	38.32	44.63	38.49	63.92	53.92	-19.29	-15.43
2	0.50547	0.24	51.61	41.22	51.85	41.46	56.00	46.00	-4.15	-4.54
3	0.84922	0.25	43.87	31.07	44.12	31.32	56.00	46.00	-11.88	-14.68
4	2.51172	0.31	39.75	28.81	40.06	29.12	56.00	46.00	-15.94	-16.88
5	6.28125	0.46	35.66	27.52	36.12	27.98	60.00	50.00	-23.88	-22.02
6	22.22656	1.01	30.69	24.29	31.70	25.30	60.00	50.00	-28.30	-24.70

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. The emission levels of other frequencies were very low against the limit.
  3. Margin value = Emission level - Limit value
  4. Correction factor = Insertion loss + Cable loss
  5. Emission Level = Correction Factor + Reading Value.

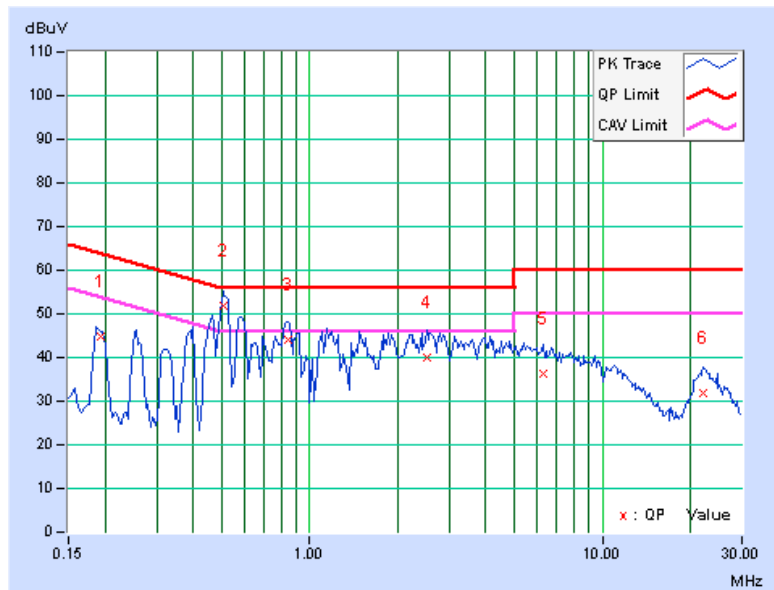




A D T

PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	0.10	48.98	26.40	49.08	26.50	66.00	56.00	-16.92	-29.50
2	0.16181	0.10	44.31	18.20	44.41	18.30	65.37	55.37	-20.96	-37.07
3	0.19301	0.10	47.82	23.19	47.92	23.29	63.91	53.91	-15.99	-30.62
4	0.30294	0.11	44.37	23.39	44.48	23.50	60.16	50.16	-15.68	-26.66
5	0.41588	0.12	41.61	23.93	41.73	24.05	57.53	47.53	-15.80	-23.48
6	0.75214	0.13	39.35	23.85	39.48	23.98	56.00	46.00	-16.52	-22.02


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. The emission levels of other frequencies were very low against the limit.
  3. Margin value = Emission level - Limit value
  4. Correction factor = Insertion loss + Cable loss
  5. Emission Level = Correction Factor + Reading Value.

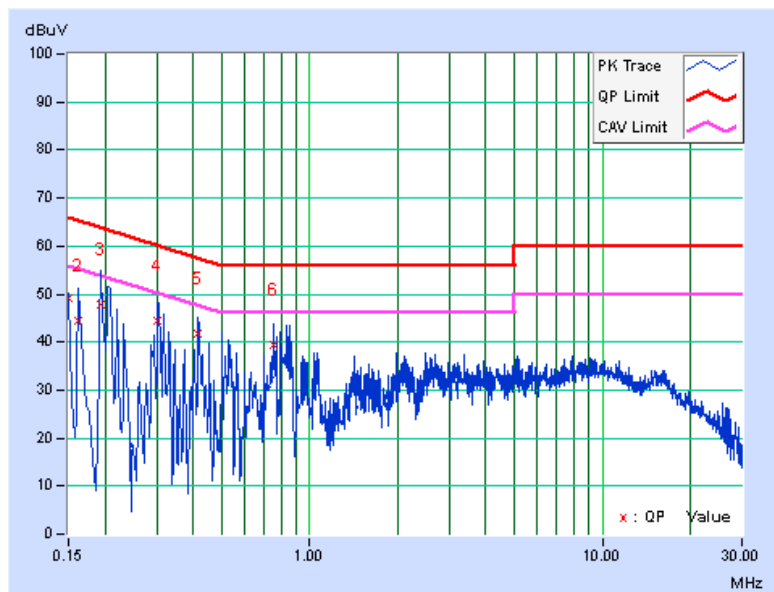

PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.21256	0.11	51.26	39.11	51.37	39.22	63.10	53.10	-11.73	-13.88
2	0.31021	0.12	44.56	30.61	44.68	30.73	59.96	49.96	-15.28	-19.23
3	0.43543	0.13	38.76	26.87	38.89	27.00	57.15	47.15	-18.26	-20.15
4	0.75605	0.14	43.74	31.85	43.88	31.99	56.00	46.00	-12.12	-14.01
5	0.80688	0.14	46.44	29.01	46.58	29.15	56.00	46.00	-9.42	-16.85
6	1.45203	0.15	37.12	23.11	37.27	23.26	56.00	46.00	-18.73	-22.74

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. The emission levels of other frequencies were very low against the limit.
  3. Margin value = Emission level - Limit value
  4. Correction factor = Insertion loss + Cable loss
  5. Emission Level = Correction Factor + Reading Value.

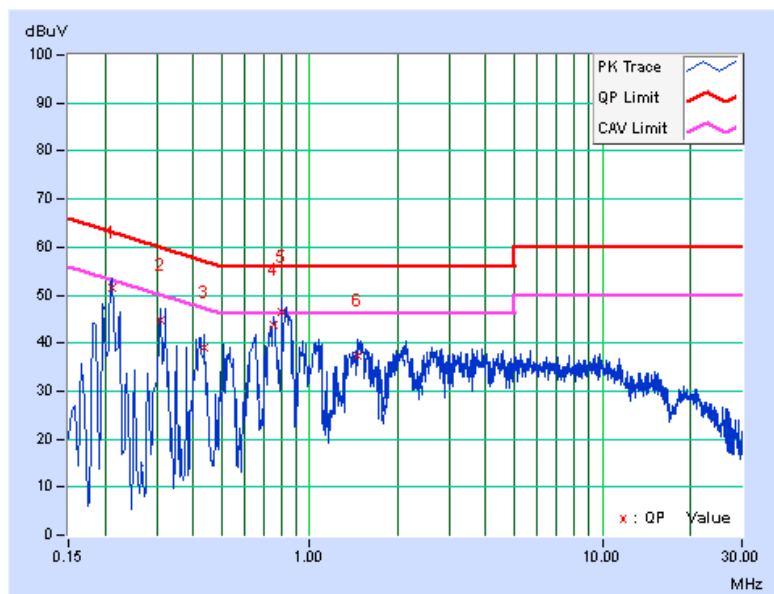


### 4.3 6dB BANDWIDTH MEASUREMENT

#### 4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 TEST SETUP

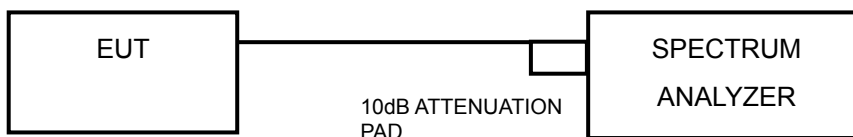

#### 4.3.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

#### 4.3.4 TEST PROCEDURE

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

#### 4.3.5 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



A D T

### 4.3.7 TEST RESULTS

#### 802.11b

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	10.10	10.09	0.5	PASS
6	2437	10.09	10.13	0.5	PASS
11	2462	10.09	10.13	0.5	PASS

#### 802.11g

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	16.48	16.47	0.5	PASS
6	2437	16.46	16.46	0.5	PASS
11	2462	16.46	16.46	0.5	PASS

#### 802.11n (20MHz)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	17.73	17.70	0.5	PASS
6	2437	17.70	17.70	0.5	PASS
11	2462	17.71	17.73	0.5	PASS

#### 802.11n (40MHz)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
3	2422	36.53	36.50	0.5	PASS
6	2437	36.48	36.49	0.5	PASS
9	2452	36.41	36.43	0.5	PASS



## 4.4 CONDUCTED OUTPUT POWER

### 4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output v02 Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for  $NANT \leq 4$ ;

Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any NANT;

Array Gain =  $5 \log(NANT/NSS)$  dB or 3 dB, whichever is less for 20-MHz channel widths with  $NANT \geq 5$ .

For power measurements on all other devices: Array Gain =  $10 \log(NANT/NSS)$  dB.

### 4.4.2 TEST SETUP

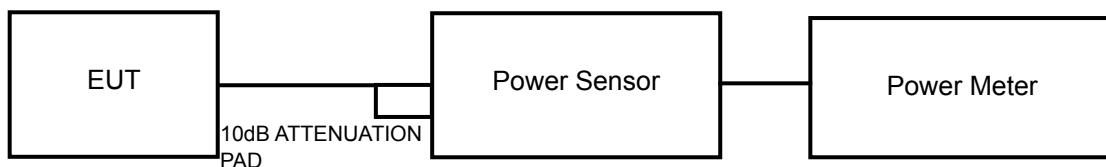

### 4.4.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

### 4.4.4 TEST PROCEDURES

Follow KDB 558074 D01 DTS Meas Guidance v03r01 section 9.1.3

A peak / average power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak / average power sensor. Record the peak power level.



A D T

#### 4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.



A D T

#### 4.4.7 TEST RESULTS

##### FOR PEAK POWER

##### 802.11b

CHAN.	FREQ. (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	17.32	17.90	115.611	20.63	30	PASS
6	2437	15.77	16.11	78.589	18.95	30	PASS
11	2462	15.08	15.12	64.720	18.11	30	PASS

##### 802.11g

CHAN.	FREQ. (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	18.73	19.04	<b>154.813</b>	21.90	30	PASS
6	2437	18.16	18.77	140.800	21.49	30	PASS
11	2462	14.49	14.58	56.827	17.55	30	PASS

##### 802.11n (20MHz)

CHAN.	FREQ. (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	18.58	18.28	139.409	21.44	30	PASS
6	2437	18.35	18.53	139.676	21.45	30	PASS
11	2462	15.59	15.34	70.422	18.48	30	PASS

##### 802.11n (40MHz)

CHAN.	FREQ. (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
3	2422	17.40	17.74	114.383	20.58	30	PASS
6	2437	16.95	17.72	108.701	20.36	30	PASS
9	2452	14.44	14.90	58.700	17.69	30	PASS



A D T

**FOR AVERAGE POWER**

**802.11b**

CHAN.	FREQUENCY (MHz)	AVG. POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
1	2412	15.55	15.79	73.823	18.68
6	2437	13.84	13.82	48.309	16.84
11	2462	13.38	13.51	44.216	16.46

**802.11g**

CHAN.	FREQUENCY (MHz)	AVG. POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
1	2412	13.34	13.62	44.591	16.49
6	2437	13.27	13.75	44.946	16.53
11	2462	7.55	7.53	11.351	10.55

**802.11n (20MHz)**

CHAN.	FREQUENCY (MHz)	AVG. POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
1	2412	12.47	12.39	34.998	15.44
6	2437	12.51	12.60	36.021	15.57
11	2462	7.38	6.92	10.390	10.17

**802.11n (40MHz)**


CHAN.	FREQUENCY (MHz)	AVG. POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
3	2422	9.46	9.73	18.228	12.61
6	2437	9.89	10.19	20.197	13.05
9	2452	5.99	6.09	8.036	9.05

## 4.5 POWER SPECTRAL DENSITY MEASUREMENT

### 4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

### 4.5.2 TEST SETUP

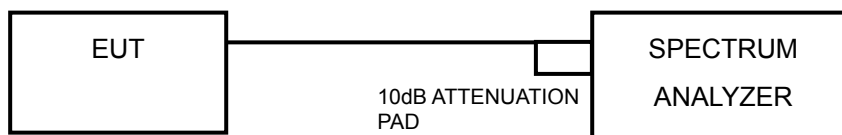

### 4.5.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

### 4.5.4 TEST PROCEDURE

Follow KDB 558074 D01 DTS Meas Guidance v03r01 section 10.2

- a. Set the RBW = 3 kHz, VBW =10 kHz, Detector = peak.
- b. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
- c. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

### 4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

### 4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6



A D T

## 4.5.7 TEST RESULTS

### 802.11b

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	-8.48	3.01	-5.47	7.49	PASS
	6	2437	-9.73	3.01	-6.72	7.49	PASS
	11	2462	-10.36	3.01	-7.35	7.49	PASS
1	1	2412	-7.57	3.01	-4.56	7.49	PASS
	6	2437	-9.40	3.01	-6.39	7.49	PASS
	11	2462	-8.97	3.01	-5.96	7.49	PASS

**NOTE:** Directional gain =  $3.5\text{dBi} + 10\log(2) = 6.51\text{dBi} > 6\text{dBi}$  , so the power density limit shall be reduced to  $8-(6.51-6) = 7.49\text{dBm}$ .

### 802.11g

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	-11.96	3.01	-8.95	7.49	PASS
	6	2437	-9.28	3.01	-6.27	7.49	PASS
	11	2462	-17.58	3.01	-14.57	7.49	PASS
1	1	2412	-12.10	3.01	-9.09	7.49	PASS
	6	2437	-10.57	3.01	-7.56	7.49	PASS
	11	2462	-16.64	3.01	-13.63	7.49	PASS

**NOTE:** Directional gain =  $3.5\text{dBi} + 10\log(2) = 6.51\text{dBi} > 6\text{dBi}$  , so the power density limit shall be reduced to  $8-(6.51-6) = 7.49\text{dBm}$ .



A D T

### 802.11n (20MHz)

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	-13.00	3.01	-9.99	7.49	PASS
	6	2437	-12.74	3.01	-9.73	7.49	PASS
	11	2462	-16.52	3.01	-13.51	7.49	PASS
1	1	2412	-13.39	3.01	-10.38	7.49	PASS
	6	2437	-13.34	3.01	-10.33	7.49	PASS
	11	2462	-18.32	3.01	-15.31	7.49	PASS

**NOTE:** Directional gain =  $3.5\text{dBi} + 10\log(2) = 6.51\text{dBi} > 6\text{dBi}$  , so the power density limit shall be reduced to  $8 - (6.51 - 6) = 7.49\text{dBm}$ .

### 802.11n (40MHz)

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	3	2422	-19.16	3.01	-16.15	7.49	PASS
	6	2437	-19.60	3.01	-16.59	7.49	PASS
	9	2452	-22.87	3.01	-19.86	7.49	PASS
1	3	2422	-17.56	3.01	-14.55	7.49	PASS
	6	2437	-17.71	3.01	-14.70	7.49	PASS
	9	2452	-20.64	3.01	-17.63	7.49	PASS


**NOTE:** Directional gain =  $3.5\text{dBi} + 10\log(2) = 6.51\text{dBi} > 6\text{dBi}$  , so the power density limit shall be reduced to  $8 - (6.51 - 6) = 7.49\text{dBm}$ .

## 4.6 CONDUCTED OUT OF BAND EMISSION MEASUREMENT

### 4.6.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.6.2 TEST SETUP

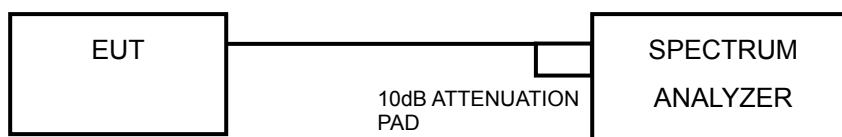

### 4.6.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

### 4.6.4 TEST PROCEDURE

#### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.





A D T

## MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Set span to encompass the spectrum to be examined.
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

### 4.6.5 DEVIATION FROM TEST STANDARD

No deviation.

### 4.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6

### 4.6.7 TEST RESULTS

The conducted emission test is performed on each TX port of operating mode without summing or adding  $10\log(N)$  since the limit is relative emission limit.


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.




A D T

# 802.11b CHAIN 0


## CH 1

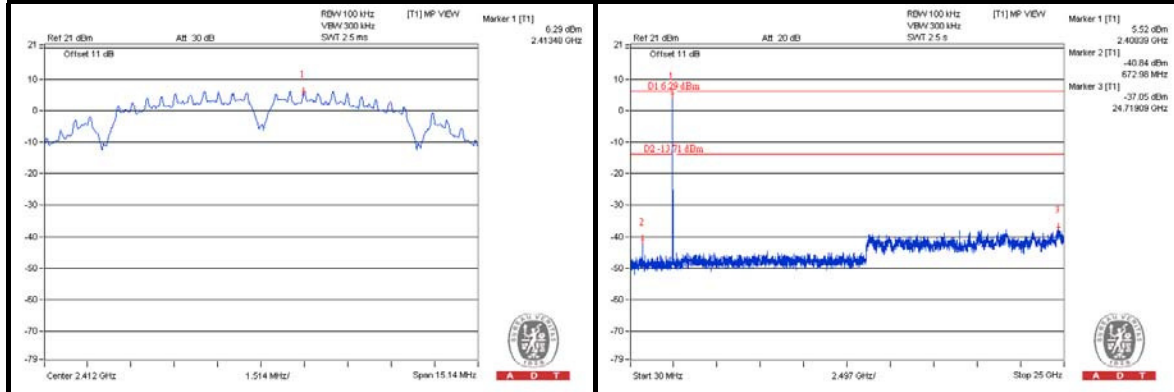

## CH 6

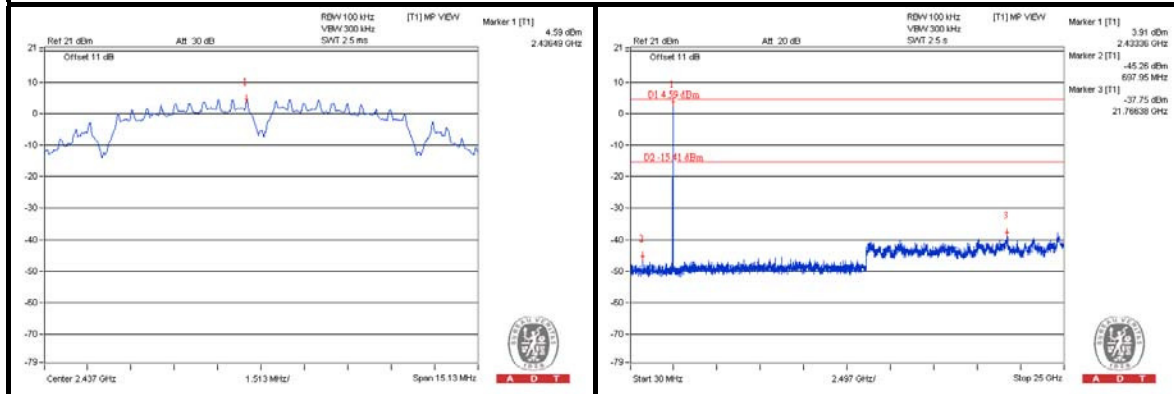

## CH 11

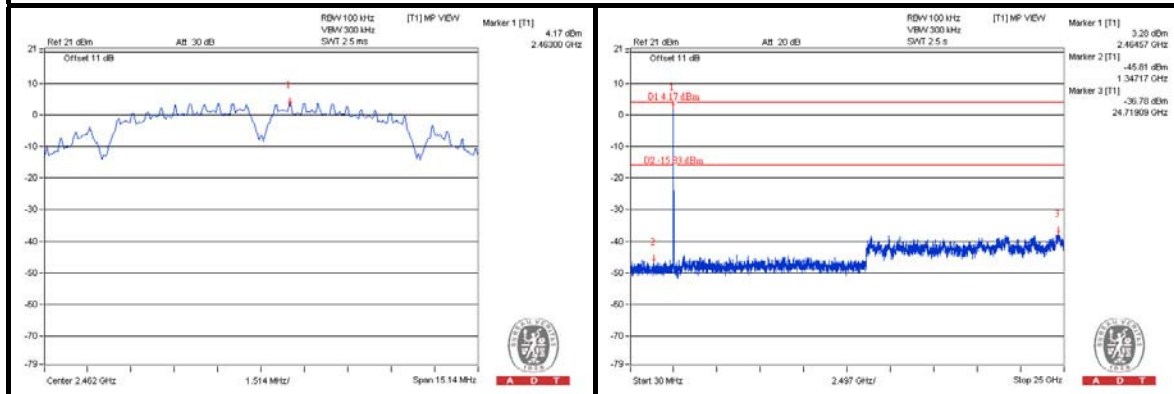





A D T

### CHAIN 1


#### CH 1

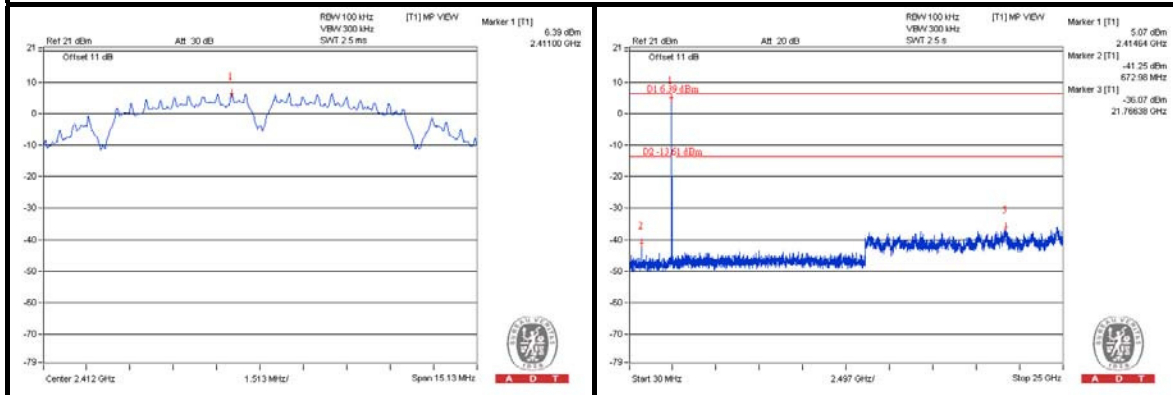

#### CH 6

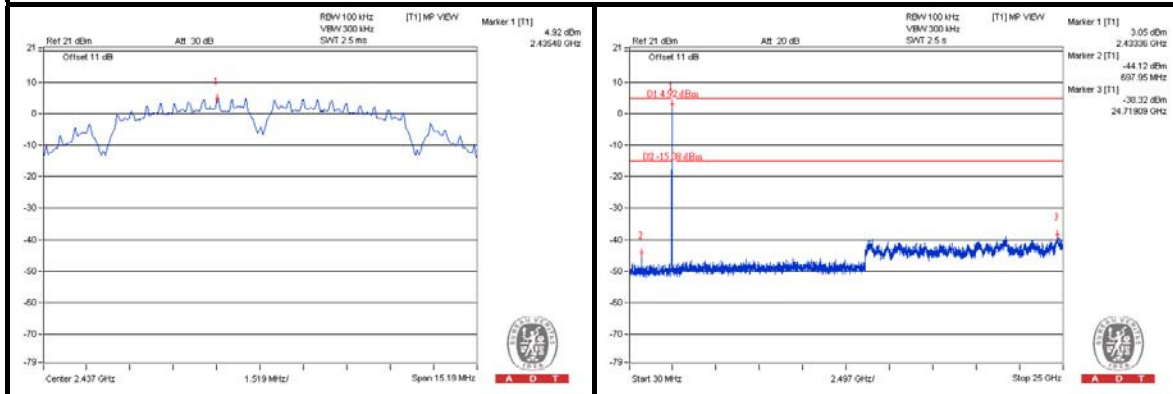

#### CH 11


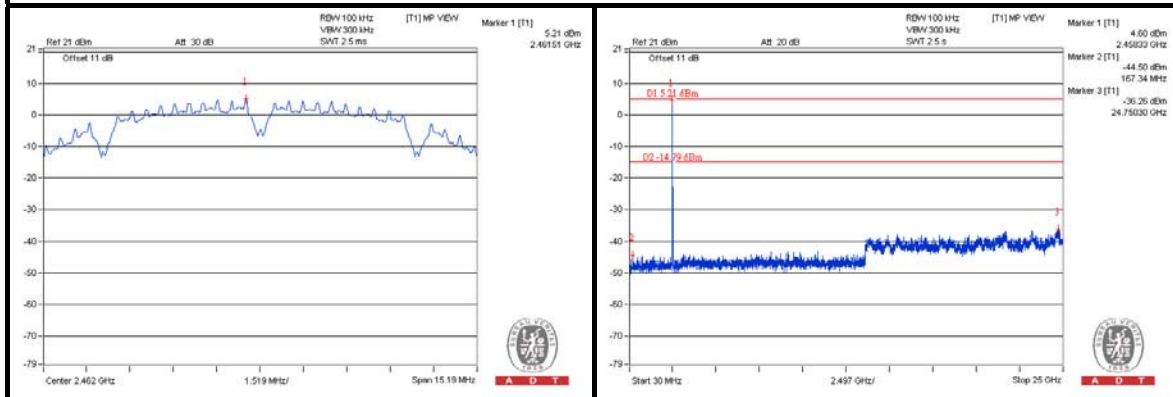






A D T

# 802.11g CHAIN 0



## CH 1

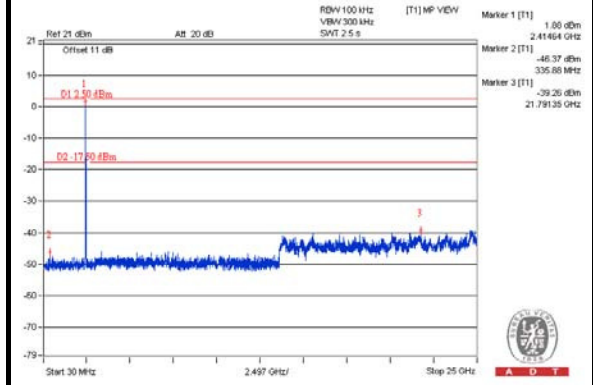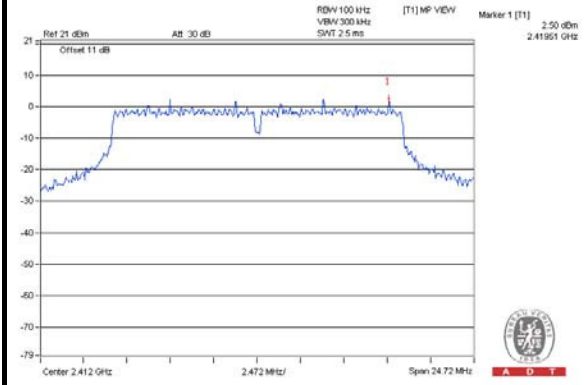

## CH 6

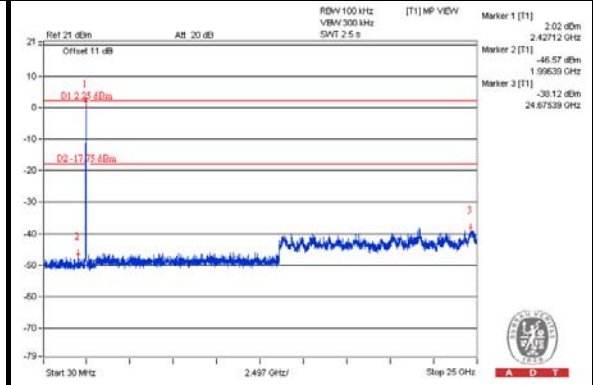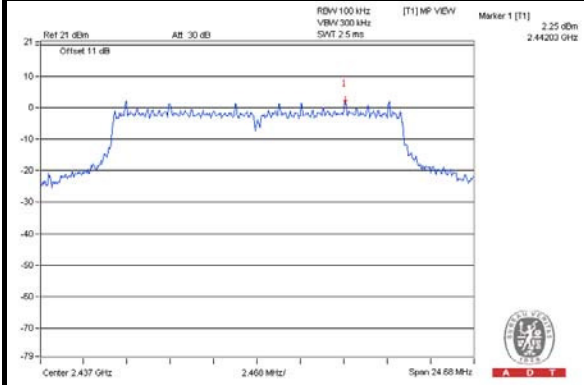

## CH 11

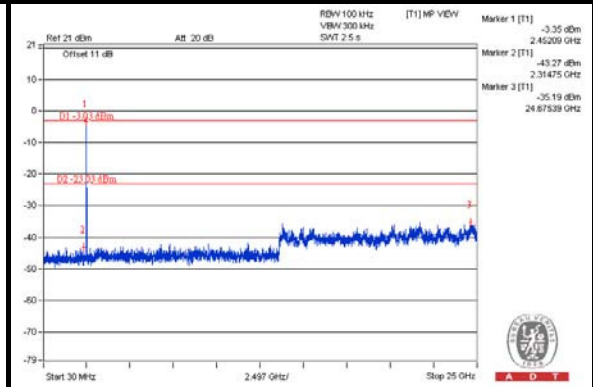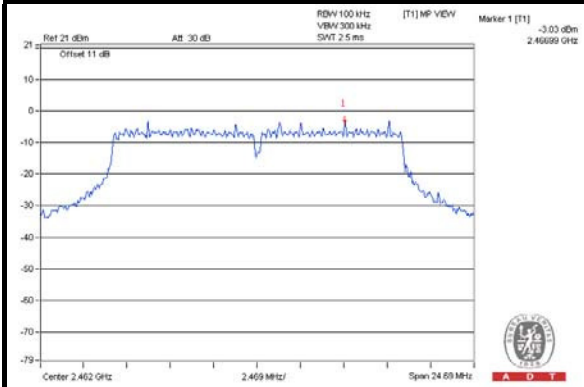





A D T

### CHAIN 1


#### CH 1

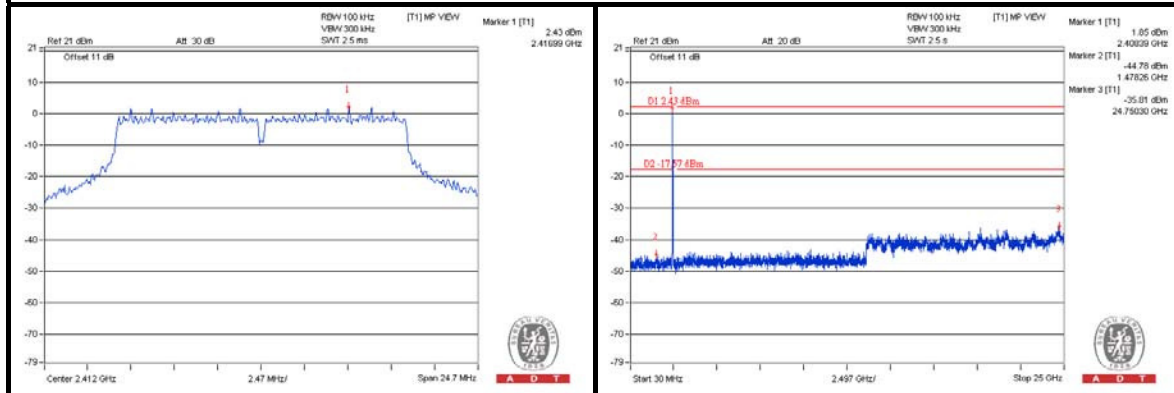

#### CH 6

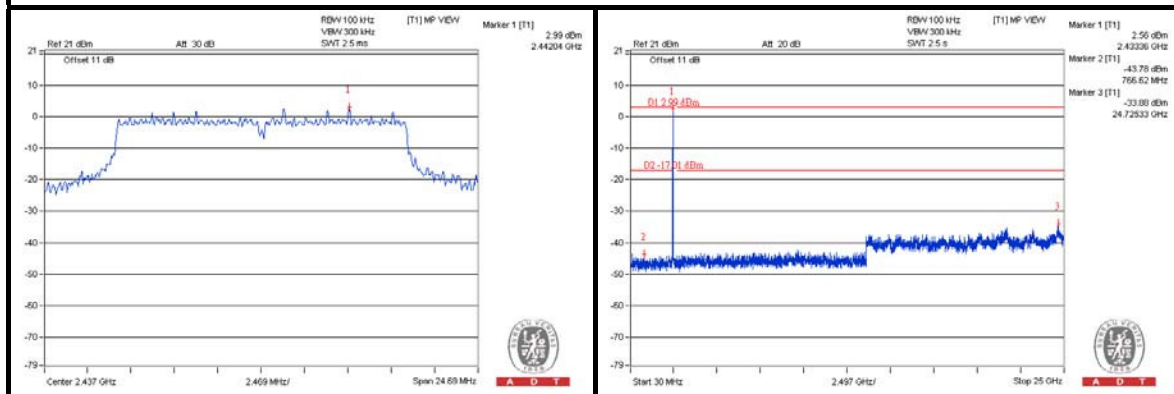

#### CH 11


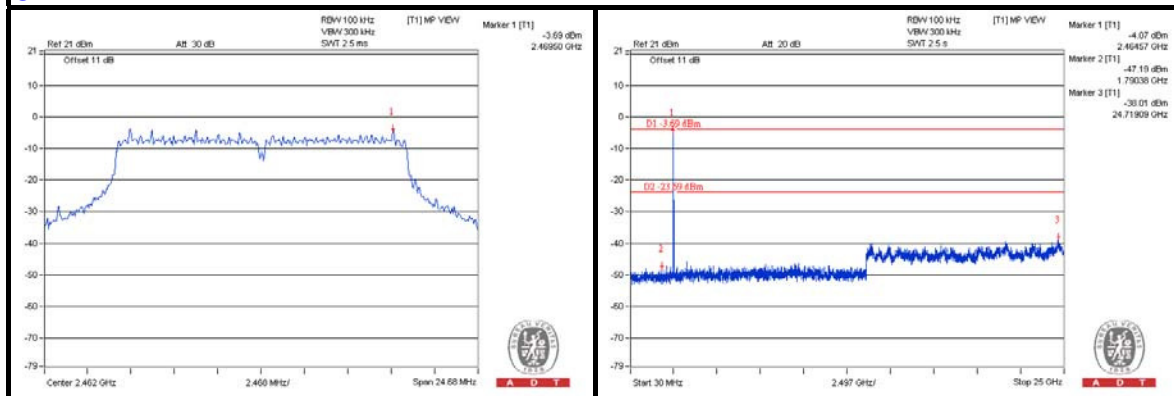






A D T

# 802.11n (20MHz) CHAIN 0



## CH 1

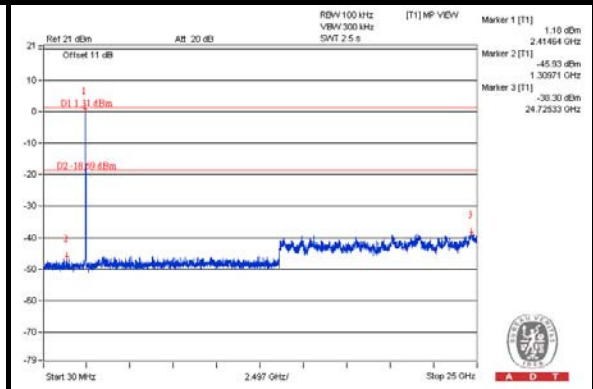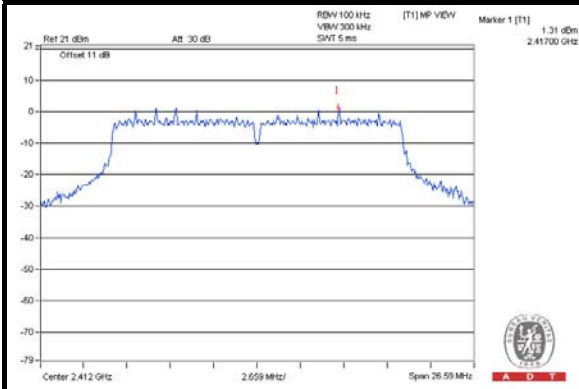

## CH 6

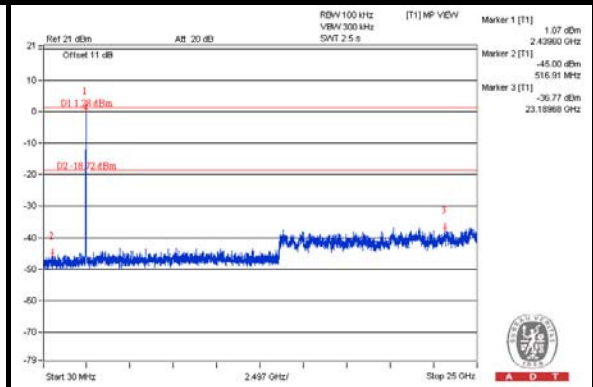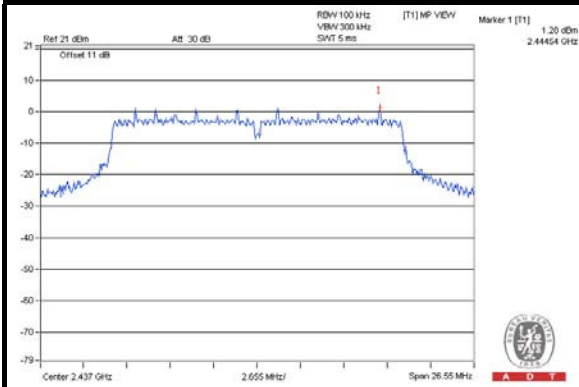

## CH 11

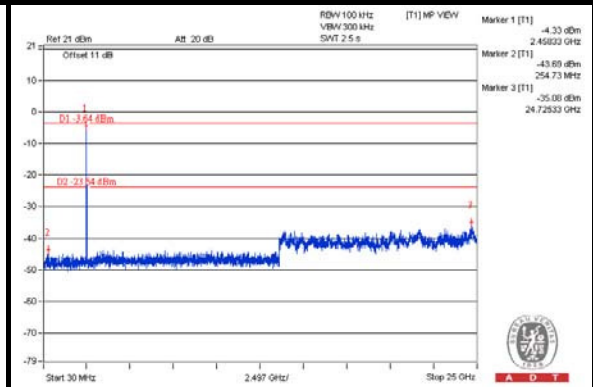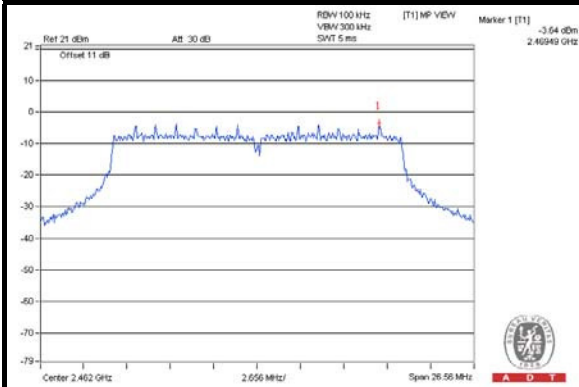





A D T

### CHAIN 1


#### CH 1

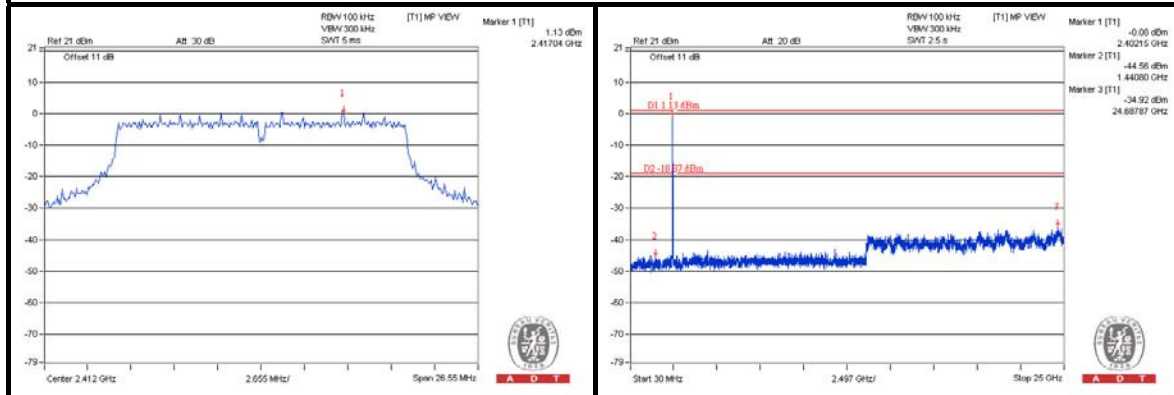

#### CH 6

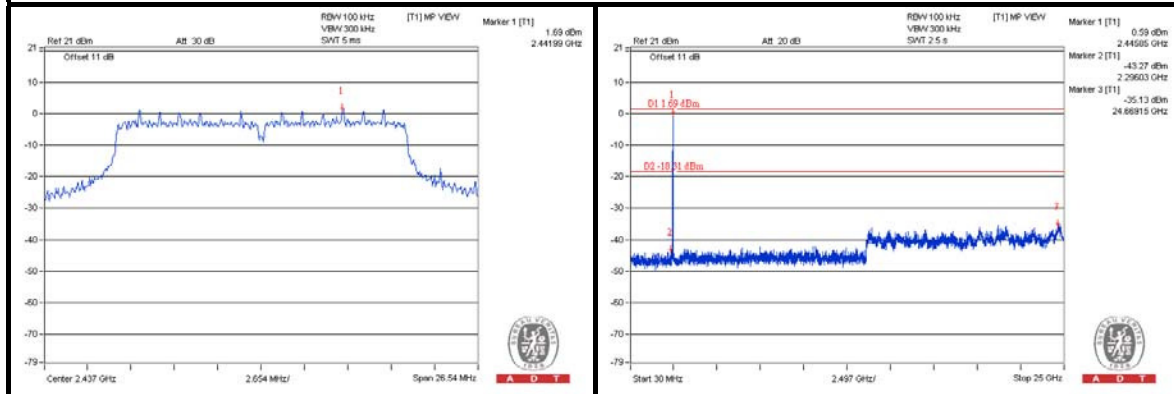

#### CH 11


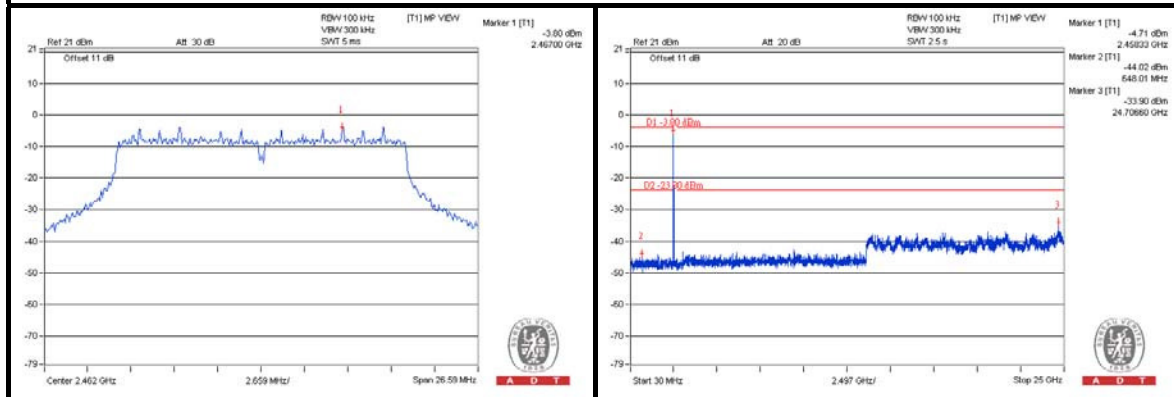






A D T

# 802.11n (40MHz) CHAIN 0



## CH 3

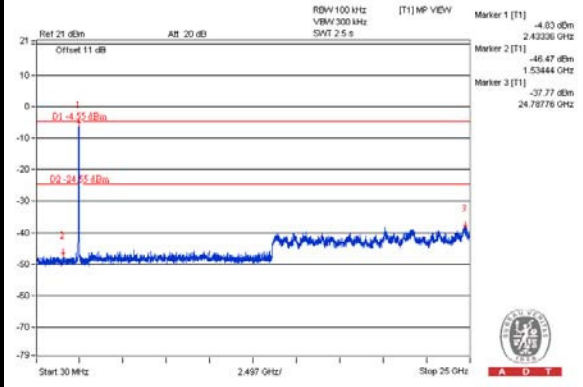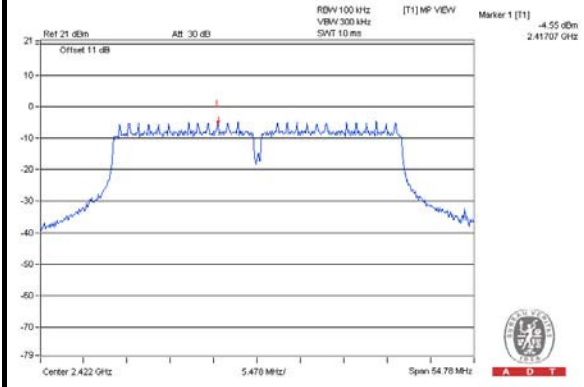

## CH 6

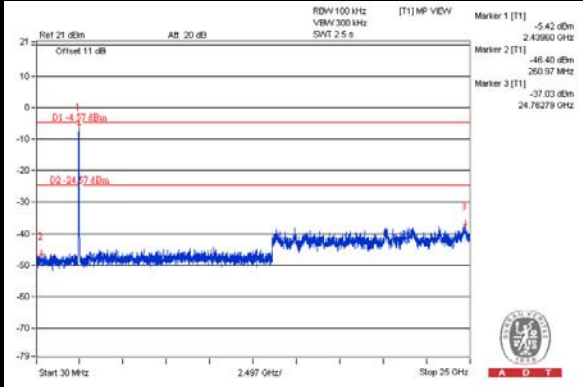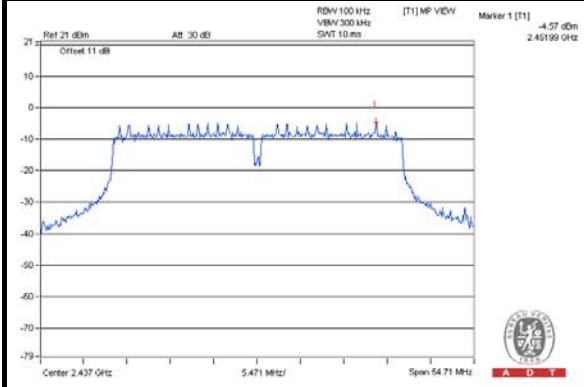

## CH 9

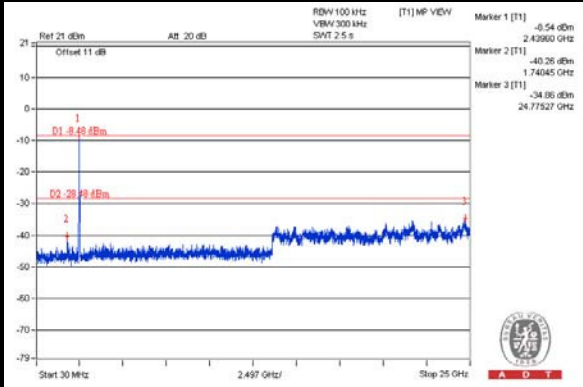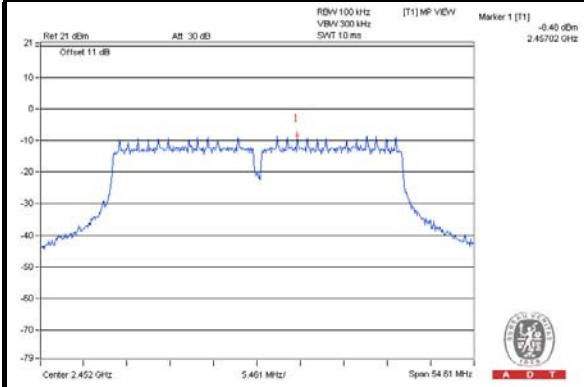







A D T

### CHAIN 1


#### CH 3

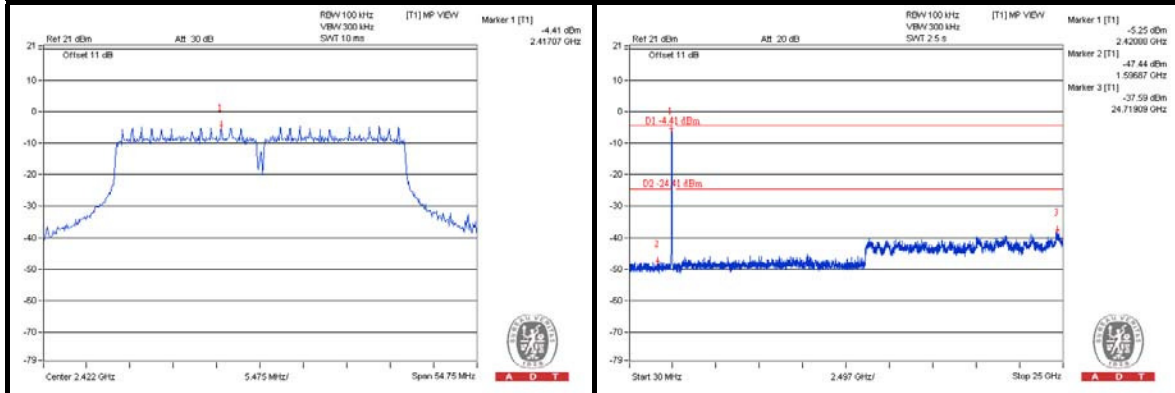

#### CH 6

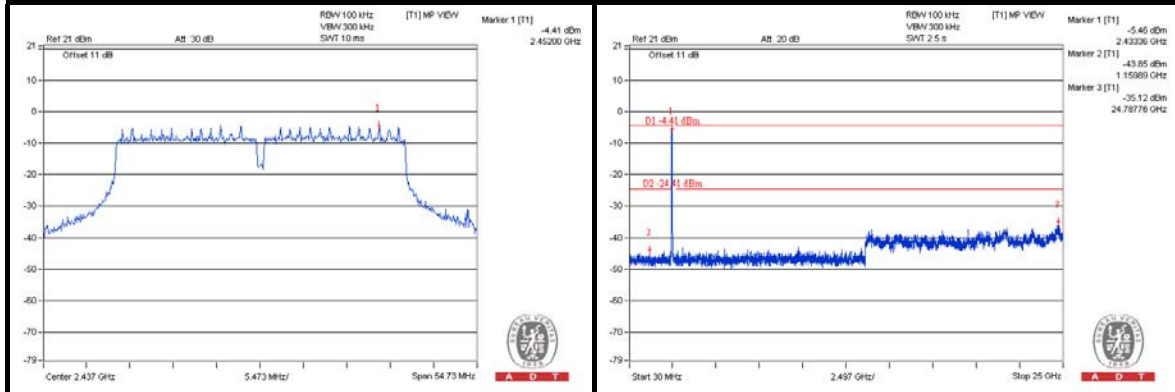

#### CH 9

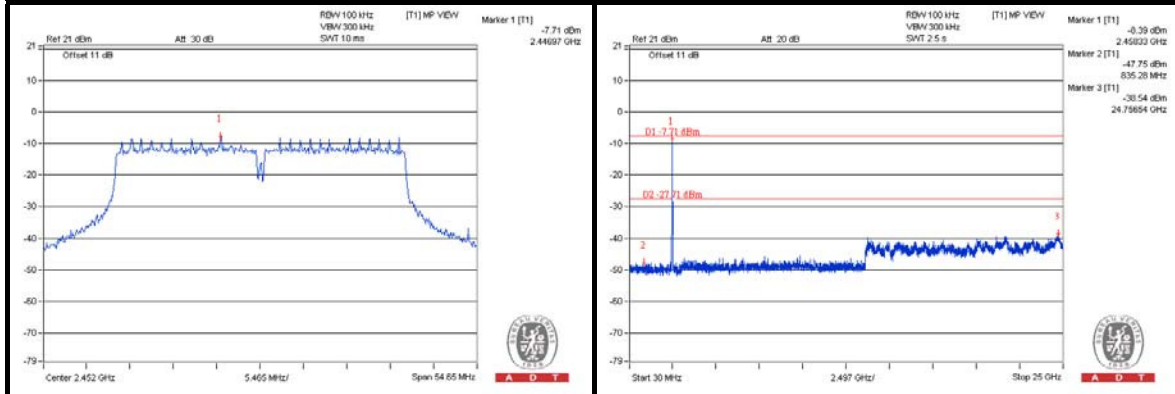



A D T

## 5. TEST TYPES AND RESULTS (FOR 5.0GHz BAND)

### 5.1 RADIATED EMISSION MEASUREMENT

#### 5.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

#### 5.1.2 TEST INSTRUMENTS

Same as item 4.1.2.

#### 5.1.3 TEST PROCEDURES

Same as item 4.1.3.

#### 5.1.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 5.1.5 TEST SETUP

Same as item 4.1.5.

#### 5.1.6 EUT OPERATING CONDITIONS

Same as item 4.1.6.



A D T

### 5.1.7 TEST RESULTS

#### ABOVE 1GHz DATA :

#### 802.11a

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 149	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 68%RH	TESTED BY	Alan Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	63.7 PK	78.1	-14.4	1.42 H	324	57.40	6.30
2	#5725.00	54.0 AV	68.4	-14.4	1.42 H	324	47.70	6.30
3	*5745.00	98.1 PK			1.42 H	324	57.90	40.20
4	*5745.00	88.4 AV			1.42 H	324	48.20	40.20
5	11490.00	64.4 PK	74.0	-9.6	1.39 H	150	45.00	19.40
6	11490.00	51.1 AV	54.0	-2.9	1.39 H	150	31.70	19.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	79.7 PK	94.1	-14.4	1.44 V	330	73.40	6.30
2	#5725.00	70.3 AV	84.7	-14.4	1.44 V	330	64.00	6.30
3	*5745.00	114.1 PK			1.44 V	330	73.90	40.20
4	*5745.00	104.7 AV			1.44 V	330	64.50	40.20
5	11490.00	66.5 PK	74.0	-7.5	1.48 V	300	47.10	19.40
6	11490.00	53.0 AV	54.0	-1.0	1.48 V	300	33.60	19.40

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 157	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 68%RH	TESTED BY	Alan Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	98.0 PK			1.47 H	333	57.60	40.40
2	*5785.00	88.0 AV			1.47 H	333	47.60	40.40
3	11570.00	63.9 PK	74.0	-10.1	1.40 H	152	44.80	19.10
4	11570.00	50.6 AV	54.0	-3.4	1.40 H	152	31.50	19.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	113.9 PK			1.44 V	332	73.50	40.40
2	*5785.00	104.7 AV			1.44 V	332	64.30	40.40
3	11570.00	67.3 PK	74.0	-6.7	1.36 V	150	48.20	19.10
4	11570.00	52.9 AV	54.0	-1.1	1.36 V	150	33.80	19.10

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.
6. The limit value is defined as per 15.247.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 165	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 68%RH	TESTED BY	Alan Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	98.6 PK			1.44 H	330	58.20	40.40
2	*5825.00	89.0 AV			1.44 H	330	48.60	40.40
3	#5850.00	58.2 PK	78.6	-20.4	1.44 H	330	51.60	6.60
4	#5850.00	48.6 AV	69.0	-20.4	1.44 H	330	42.00	6.60
5	11650.00	64.3 PK	74.0	-9.7	1.45 H	155	45.40	18.90
6	11650.00	50.7 AV	54.0	-3.3	1.45 H	155	31.80	18.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	113.6 PK			1.47 V	66	73.20	40.40
2	*5825.00	105.0 AV			1.47 V	66	64.60	40.40
3	#5850.00	73.2 PK	93.6	-20.4	1.47 V	66	66.60	6.60
4	#5850.00	64.7 AV	85.0	-20.3	1.47 V	66	58.10	6.60
5	11650.00	65.3 PK	74.0	-8.7	1.42 V	156	46.40	18.90
6	11650.00	52.8 AV	54.0	-1.2	1.42 V	156	33.90	18.90

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

802.11n (20MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 149	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 68%RH	TESTED BY	Alan Wu

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	66.8 PK	78.7	-11.9	1.44 H	325	60.50	6.30
2	#5725.00	56.9 AV	68.8	-11.9	1.44 H	325	50.60	6.30
3	*5745.00	98.7 PK			1.44 H	325	58.50	40.20
4	*5745.00	88.8 AV			1.44 H	325	48.60	40.20
5	11490.00	64.9 PK	74.0	-9.1	1.40 H	166	45.50	19.40
6	11490.00	51.5 AV	54.0	-2.5	1.40 H	166	32.10	19.40

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	82.2 PK	94.2	-12.0	1.36 V	330	75.90	6.30
2	#5725.00	73.0 AV	84.9	-11.9	1.36 V	330	66.70	6.30
3	*5745.00	114.2 PK			1.36 V	330	74.00	40.20
4	*5745.00	104.9 AV			1.36 V	330	64.70	40.20
5	11490.00	66.0 PK	74.0	-8.0	1.49 V	302	46.60	19.40
6	11490.00	52.9 AV	54.0	-1.1	1.49 V	302	33.50	19.40

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 157	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 68%RH	TESTED BY	Alan Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	98.1 PK			1.44 H	332	57.70	40.40
2	*5785.00	87.9 AV			1.44 H	332	47.50	40.40
3	11570.00	63.7 PK	74.0	-10.3	1.44 H	156	44.60	19.10
4	11570.00	50.4 AV	54.0	-3.6	1.44 H	156	31.30	19.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	114.2 PK			1.29 V	306	73.80	40.40
2	*5785.00	104.7 AV			1.29 V	306	64.30	40.40
3	11570.00	64.5 PK	74.0	-9.5	1.37 V	149	45.40	19.10
4	11570.00	52.5 AV	54.0	-1.5	1.37 V	149	33.40	19.10

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.
6. The limit value is defined as per 15.247.





A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 165	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 68%RH	TESTED BY	Alan Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	99.0 PK			1.40 H	333	58.60	40.40
2	*5825.00	89.1 AV			1.40 H	333	48.70	40.40
3	#5850.00	62.7 PK	79.0	-16.3	1.40 H	333	56.10	6.60
4	#5850.00	52.8 AV	69.1	-16.3	1.40 H	333	46.20	6.60
5	11650.00	65.4 PK	74.0	-8.6	1.25 H	52	46.50	18.92
6	11650.00	51.0 AV	54.0	-3.0	1.44 H	168	32.10	18.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	113.8 PK			1.16 V	339	73.40	40.40
2	*5825.00	104.7 AV			1.16 V	339	64.30	40.40
3	#5850.00	77.5 PK	93.8	-16.3	1.16 V	339	70.90	6.60
4	#5850.00	68.4 AV	84.7	-16.3	1.16 V	339	61.80	6.60
5	11650.00	66.7 PK	74.0	-7.3	1.28 V	153	47.80	18.90
6	11650.00	52.9 AV	54.0	-1.1	1.28 V	153	34.00	18.90

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

802.11n (40MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 151	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 68%RH	TESTED BY	Alan Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	63.6 PK	76.8	-13.2	1.35 H	320	57.30	6.30
2	#5725.00	54.0 AV	67.2	-13.2	1.35 H	320	47.70	6.30
3	*5755.00	96.8 PK			1.32 H	320	56.60	40.20
4	*5755.00	87.2 AV			1.32 H	320	47.00	40.20
5	11510.00	63.3 PK	74.0	-10.7	1.33 H	124	44.00	19.30
6	11510.00	50.5 AV	54.0	-3.5	1.33 H	124	31.20	19.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	80.0 PK	93.2	-13.2	1.31 V	10	73.70	6.30
2	#5725.00	70.1 AV	83.3	-13.2	1.31 V	10	63.80	6.30
3	*5755.00	113.2 PK			1.31 V	10	73.00	40.20
4	*5755.00	103.3 AV			1.31 V	10	63.10	40.20
5	11510.00	65.5 PK	74.0	-8.5	1.33 V	316	46.20	19.30
6	11510.00	52.5 AV	54.0	-1.5	1.33 V	316	33.20	19.30

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 159	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 68%RH	TESTED BY	Alan Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	97.2 PK			1.36 H	320	56.80	40.40
2	*5795.00	87.6 AV			1.36 H	320	47.20	40.40
3	#5850.00	58.8 PK	77.2	-18.4	1.36 H	320	52.20	6.60
4	#5850.00	49.2 AV	67.6	-18.4	1.36 H	320	42.60	6.60
5	11590.00	63.3 PK	74.0	-10.7	1.35 H	254	44.30	19.00
6	11590.00	50.6 AV	54.0	-3.4	1.35 H	254	31.60	19.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	112.7 PK			1.34 V	312	72.30	40.40
2	*5795.00	102.8 AV			1.34 V	312	62.40	40.40
3	#5850.00	74.3 PK	92.7	-18.4	1.36 V	312	67.70	6.60
4	#5850.00	64.4 AV	82.8	-18.4	1.36 V	312	57.80	6.60
5	11590.00	65.9 PK	74.0	-8.1	1.44 V	254	46.90	19.00
6	11590.00	52.4 AV	54.0	-1.6	1.44 V	254	33.40	19.00

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ \* “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T


**BELOW 1GHz WORST-CASE DATA : 802.11a**

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 165	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 70%RH	TESTED BY	Alan Wu
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	80.35	26.0 QP	40.0	-14.0	1.49 H	221	44.50	-18.50
2	142.44	35.7 QP	43.5	-7.8	1.25 H	118	50.30	-14.60
3	287.97	39.7 QP	46.0	-6.3	1.25 H	96	52.70	-13.00
4	386.93	39.9 QP	46.0	-6.1	1.00 H	225	51.20	-11.30
5	577.09	30.2 QP	46.0	-15.8	1.49 H	77	38.00	-7.80
6	734.27	31.8 QP	46.0	-14.2	2.00 H	34	36.60	-4.80

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

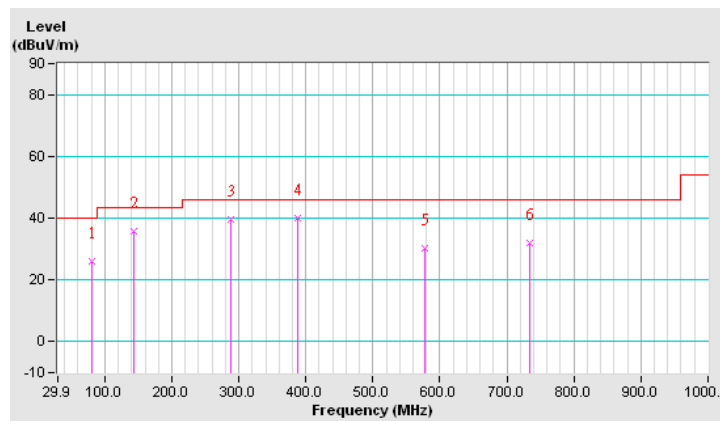




A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 165	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 70%RH	TESTED BY	Alan Wu
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	43.48	35.8 QP	40.0	-4.2	1.24 V	259	50.40	-14.60
2	80.35	34.2 QP	40.0	-5.8	1.24 V	13	52.70	-18.50
3	142.44	31.7 QP	43.5	-11.8	1.75 V	13	46.30	-14.60
4	287.97	36.0 QP	46.0	-10.0	1.49 V	168	49.00	-13.00
5	384.99	39.6 QP	46.0	-6.4	1.24 V	143	50.90	-11.30
6	577.09	30.4 QP	46.0	-15.6	1.49 V	74	38.20	-7.80

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

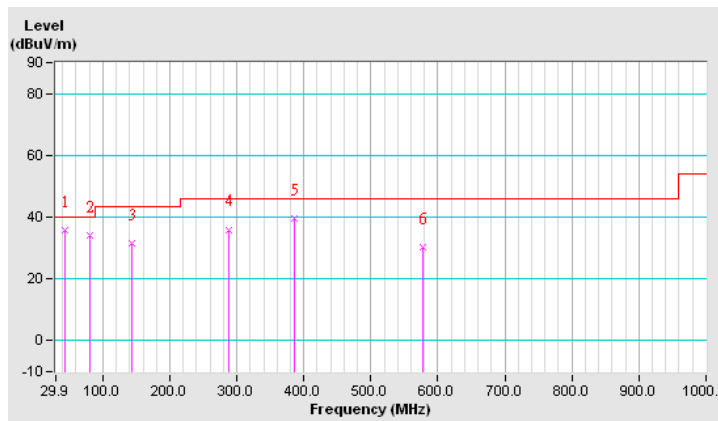




A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 165	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 70%RH	TESTED BY	Alan Wu
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	165.80	32.0 QP	43.5	-11.5	1.24 H	100	46.50	-14.50
2	288.02	35.2 QP	46.0	-10.8	1.00 H	83	48.00	-12.80
3	340.40	34.2 QP	46.0	-11.8	1.00 H	355	46.00	-11.80
4	367.56	37.1 QP	46.0	-8.9	1.00 H	153	48.40	-11.30
5	480.08	35.6 QP	46.0	-10.4	1.99 H	64	45.00	-9.40
6	734.22	32.5 QP	46.0	-13.5	1.00 H	105	36.90	-4.40

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

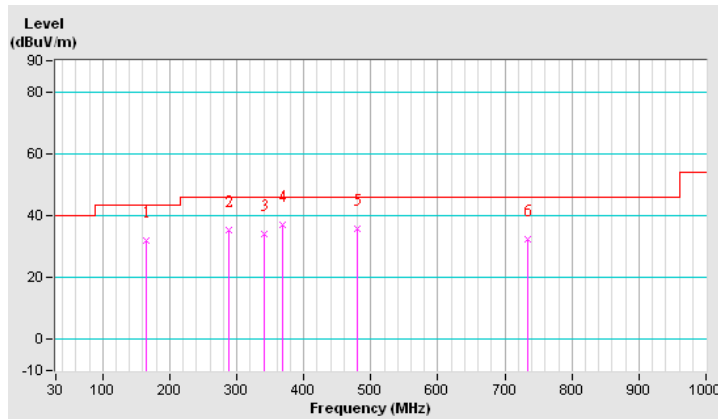




A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 165	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 70%RH	TESTED BY	Alan Wu
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	53.28	36.6 QP	40.0	-3.4	1.49 V	62	50.30	-13.70
2	74.62	32.4 QP	40.0	-7.6	1.49 V	10	49.50	-17.10
3	127.00	30.5 QP	43.5	-13.0	1.00 V	5	46.00	-15.50
4	288.02	29.5 QP	46.0	-16.5	1.49 V	25	42.30	-12.80
5	367.56	34.7 QP	46.0	-11.3	1.00 V	192	46.00	-11.30
6	431.58	31.7 QP	46.0	-14.3	1.00 V	324	41.70	-10.00

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

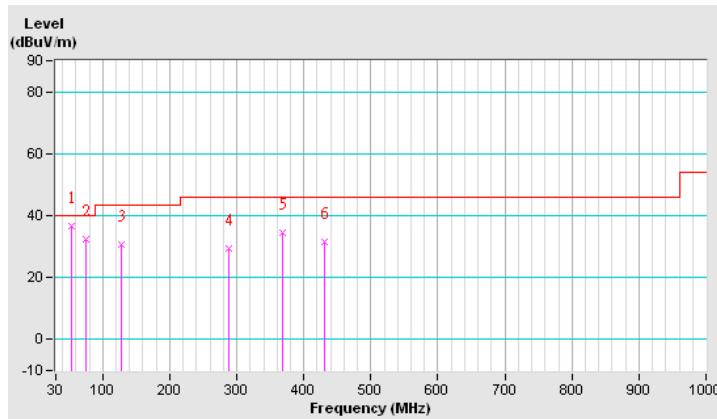



## 5.2 CONDUCTED EMISSION MEASUREMENT

### 5.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
  3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

### 5.2.2 TEST INSTRUMENTS

Same as item 4.2.2.

### 5.2.3 TEST PROCEDURES

Same as item 4.2.3.

### 5.2.4 DEVIATION FROM TEST STANDARD

No deviation.

### 5.2.5 TEST SETUP

Same as item 4.2.5.

### 5.2.6 EUT OPERATING CONDITIONS

Same as item 4.1.6.



### 5.2.7 TEST RESULTS


**CONDUCTED WORST-CASE DATA : 802.11a**

<b>PHASE</b>	Line 1	<b>6dB BANDWIDTH</b>	9kHz
<b>TEST MODE</b>	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18771	0.16	45.22	35.01	45.38	35.17	64.14	54.14	-18.76	-18.97
2	0.49766	0.23	49.18	38.33	49.41	38.56	56.04	46.04	-6.63	-7.48
3	0.84531	0.24	40.17	29.19	40.41	29.43	56.00	46.00	-15.59	-16.57
4	4.21484	0.41	36.15	27.96	36.56	28.37	56.00	46.00	-19.44	-17.63
5	8.26563	0.63	34.44	27.33	35.07	27.96	60.00	50.00	-24.93	-22.04
6	23.07422	1.38	31.11	24.75	32.49	26.13	60.00	50.00	-27.51	-23.87

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

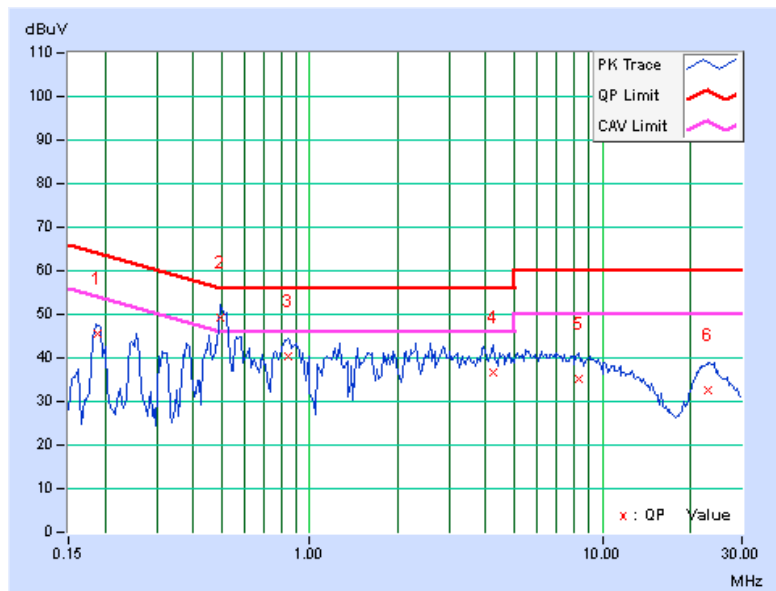




A D T

PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19297	0.17	44.18	38.26	44.35	38.43	63.91	53.91	-19.56	-15.48
2	0.50547	0.24	52.26	41.99	52.50	42.23	56.00	46.00	-3.50	-3.77
3	0.82969	0.25	44.65	32.60	44.90	32.85	56.00	46.00	-11.10	-13.15
4	2.57813	0.31	40.04	29.63	40.35	29.94	56.00	46.00	-15.65	-16.06
5	6.26172	0.46	35.82	27.93	36.28	28.39	60.00	50.00	-23.72	-21.61
6	22.18359	1.01	30.78	24.30	31.79	25.31	60.00	50.00	-28.21	-24.69

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

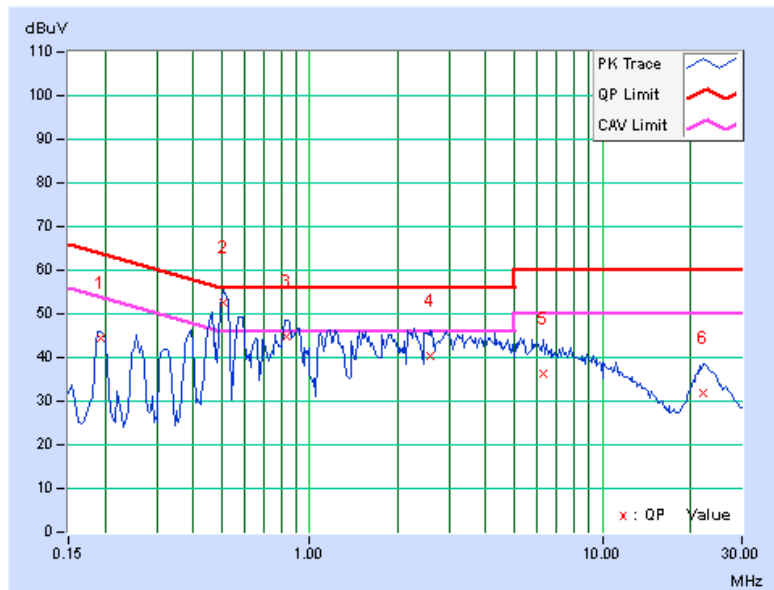




A D T

PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16967	0.10	50.91	23.52	51.01	23.62	64.98	54.98	-13.97	-31.36
2	0.20865	0.10	50.51	35.73	50.61	35.83	63.26	53.26	-12.65	-17.43
3	0.31031	0.11	43.53	27.06	43.64	27.17	59.96	49.96	-16.32	-22.79
4	0.42334	0.12	40.74	24.29	40.86	24.41	57.38	47.38	-16.52	-22.97
5	0.74432	0.13	38.50	23.27	38.63	23.40	56.00	46.00	-17.37	-22.60
6	1.06494	0.14	33.37	17.80	33.51	17.94	56.00	46.00	-22.49	-28.06

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

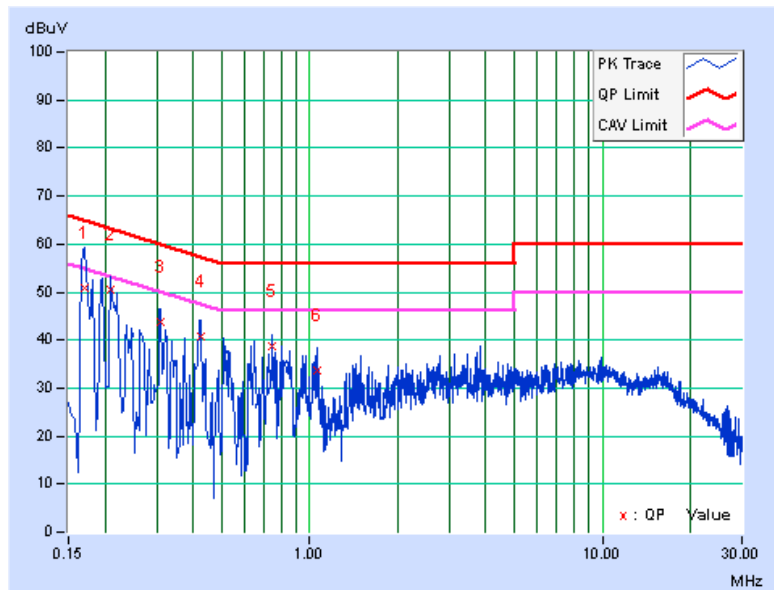


PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	0.11	48.03	26.44	48.14	26.55	65.79	55.79	-17.65	-29.24
2	0.16955	0.11	48.69	20.91	48.80	21.02	64.98	54.98	-16.18	-33.96
3	0.21647	0.11	49.55	32.95	49.66	33.06	62.95	52.95	-13.29	-19.89
4	0.41197	0.13	39.79	21.77	39.92	21.90	57.61	47.61	-17.69	-25.71
5	0.75605	0.14	39.93	24.21	40.07	24.35	56.00	46.00	-15.93	-21.65
6	0.80297	0.14	41.24	20.20	41.38	20.34	56.00	46.00	-14.62	-25.66

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

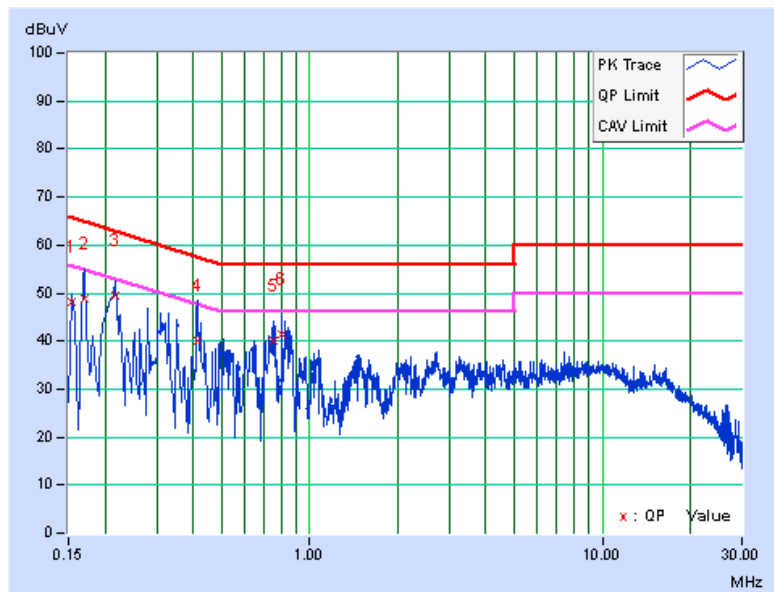



A D T

## **5.3 6dB BANDWIDTH MEASUREMENT**

### **5.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT**

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

### **5.3.2 TEST SETUP**

Same as item 4.3.2.

### **5.3.3 TEST INSTRUMENTS**

Refer to section 4.1.2 to get information of above instrument.

### **5.3.4 TEST PROCEDURE**

Same as item 4.3.4.

### **5.3.5 DEVIATION FROM TEST STANDARD**

No deviation.

### **5.3.6 EUT OPERATING CONDITIONS**

Same as item 4.3.6.



### 5.3.7 TEST RESULTS

#### 802.11a

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)			MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
149	5745	16.42	16.39	16.40	0.5	PASS
157	5785	16.42	16.43	16.43	0.5	PASS
165	5825	16.44	16.46	16.43	0.5	PASS

#### 802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)			MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
149	5745	17.60	17.62	17.61	0.5	PASS
157	5785	17.67	17.66	17.68	0.5	PASS
165	5825	17.64	17.66	17.64	0.5	PASS

#### 802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)			MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
151	5755	35.86	35.86	36.02	0.5	PASS
159	5795	36.03	36.45	36.43	0.5	PASS

## 5.4 CONDUCTED OUTPUT POWER

### 5.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 5725 –5850 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output v02 Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for  $NANT \leq 4$ ;

Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any NANT;

Array Gain =  $5 \log(NANT/NSS)$  dB or 3 dB, whichever is less for 20-MHz channel widths with  $NANT \geq 5$ .

For power measurements on all other devices: Array Gain =  $10 \log(NANT/NSS)$  dB.

### 5.4.2 TEST SETUP

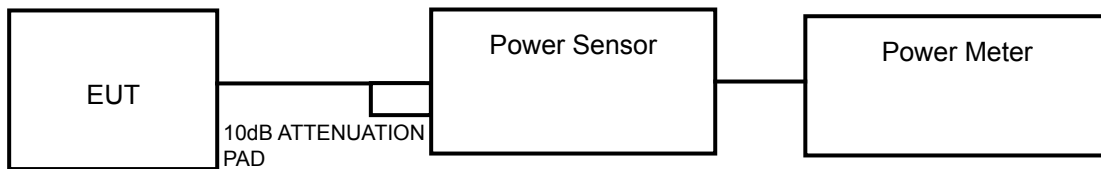

### 5.4.3 INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.



A D T

#### 5.4.4 TEST PROCEDURES

Follow KDB 558074 D01 DTS Meas Guidance v03r01 section 9.1.3

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

#### 5.4.5 DEVIATION FROM TEST STANDARD

No deviation.

#### 5.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.





A D T

## 5.4.7 TEST RESULTS

### FOR PEAK POWER

#### 802.11a

CHAN.	CHAN. FREQ. (MHz)	PEAK POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
149	5745	21.43	22.33	22.01	468.852	26.71	30	PASS
157	5785	21.43	21.95	20.90	418.697	26.22	30	PASS
165	5825	21.31	23.10	22.34	510.777	27.08	30	PASS

#### 802.11n (20MHz)

CHAN.	CHAN. FREQ. (MHz)	PEAK POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
149	5745	20.95	22.11	21.24	420.051	26.23	30	PASS
157	5785	21.65	22.06	21.73	455.848	26.59	30	PASS
165	5825	21.33	22.26	22.25	471.978	26.74	30	PASS

#### 802.11n (40MHz)

CHAN.	CHAN. FREQ. (MHz)	PEAK POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
151	5755	22.25	23.20	22.34	<b>548.206</b>	27.39	30	PASS
159	5795	22.19	22.71	22.49	529.634	27.24	30	PASS



**FOR AVERAGE POWER**

**802.11a**

CHANNEL	FREQUENCY (MHz)	AVG. POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1	CHAIN 2		
149	5745	13.54	14.86	14.24	79.760	19.02
157	5785	13.61	14.34	14.11	75.888	18.80
165	5825	14.51	15.66	15.24	98.482	19.93

**802.11n (20MHz)**

CHANNEL	FREQUENCY (MHz)	AVG. POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1	CHAIN 2		
149	5745	13.84	15.01	14.21	82.269	19.15
157	5785	13.60	14.84	14.22	79.812	19.02
165	5825	14.93	15.62	15.32	101.633	20.07

**802.11n (40MHz)**

CHANNEL	FREQUENCY (MHz)	AVG. POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1	CHAIN 2		
151	5755	15.74	16.59	16.23	125.077	20.97
159	5795	15.86	16.82	16.33	129.586	21.13



A D T

## **5.5 POWER SPECTRAL DENSITY MEASUREMENT**

### **5.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT**

The Maximum of Power Spectral Density Measurement is 8dBm.

### **5.5.2 TEST SETUP**

Same as item 4.5.2.

### **5.5.3 TEST INSTRUMENTS**

Refer to section 4.1.2 to get information of above instrument.

### **5.5.4 TEST PROCEDURE.**

Same as item 4.5.4.

### **5.5.5 DEVIATION FROM TEST STANDARD**

No deviation.

### **5.5.6 EUT OPERATING CONDITION**

Same as item 4.3.6.



A D T

## 5.5.7 TEST RESULTS

### 802.11a

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=3) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	149	5745	-11.90	4.77	-7.13	4.23	PASS
	157	5785	-10.77	4.77	-6.00	4.23	PASS
	165	5825	-11.03	4.77	-6.26	4.23	PASS
1	149	5745	-10.91	4.77	-6.14	4.23	PASS
	157	5785	-11.46	4.77	-6.69	4.23	PASS
	165	5825	-8.99	4.77	-4.22	4.23	PASS
2	149	5745	-11.32	4.77	-6.55	4.23	PASS
	157	5785	-10.45	4.77	-5.68	4.23	PASS
	165	5825	-9.01	4.77	-4.24	4.23	PASS

**NOTE:** Directional gain =  $5\text{dBi} + 10\log(3) = 9.77\text{dBi} > 6\text{dBi}$  , so the power density limit shall be reduced to  $8-(9.77-6) = 4.23\text{dBm}$ .

### 802.11n (20MHz)

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=3) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	149	5745	-10.37	4.77	-5.60	4.23	PASS
	157	5785	-10.60	4.77	-5.83	4.23	PASS
	165	5825	-11.59	4.77	-6.82	4.23	PASS
1	149	5745	-10.91	4.77	-6.14	4.23	PASS
	157	5785	-11.89	4.77	-7.12	4.23	PASS
	165	5825	-9.50	4.77	-4.73	4.23	PASS
2	149	5745	-11.40	4.77	-6.63	4.23	PASS
	157	5785	-10.09	4.77	-5.32	4.23	PASS
	165	5825	-11.18	4.77	-6.41	4.23	PASS

**NOTE:** Directional gain =  $5\text{dBi} + 10\log(3) = 9.77\text{dBi} > 6\text{dBi}$  , so the power density limit shall be reduced to  $8-(9.77-6) = 4.23\text{dBm}$ .



A D T

### 802.11n (40MHz)

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=3) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	151	5755	-12.30	4.77	-7.53	4.23	PASS
	159	5795	-12.42	4.77	-7.65	4.23	PASS
1	151	5755	-10.96	4.77	-6.19	4.23	PASS
	159	5795	-10.70	4.77	-5.93	4.23	PASS
2	151	5755	-12.58	4.77	-7.81	4.23	PASS
	159	5795	-11.62	4.77	-6.85	4.23	PASS

**NOTE:** Directional gain =  $5\text{dBi} + 10\log(3) = 9.77\text{dBi} > 6\text{dBi}$  , so the power density limit shall be reduced to  $8 - (9.77 - 6) = 4.23\text{dBm}$ .



A D T

## 5.6 CONDUCTED OUT OF BAND EMISSION MEASUREMENT

### 5.6.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT

Below  $-20\text{dB}$  of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 5.6.2 TEST SETUP

Same as Item 4.6.2

### 5.6.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

### 5.6.4 TEST PROCEDURE

Same as Item 4.6.4

### 5.6.5 DEVIATION FROM TEST STANDARD

No deviation.

### 5.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6

### 5.6.7 TEST RESULTS

The conducted emission test is performed on each TX port of operating mode without summing or adding  $10\log(N)$  since the limit is relative emission limit.


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.




A D T

802.11a  
CHAIN 0


CH 149

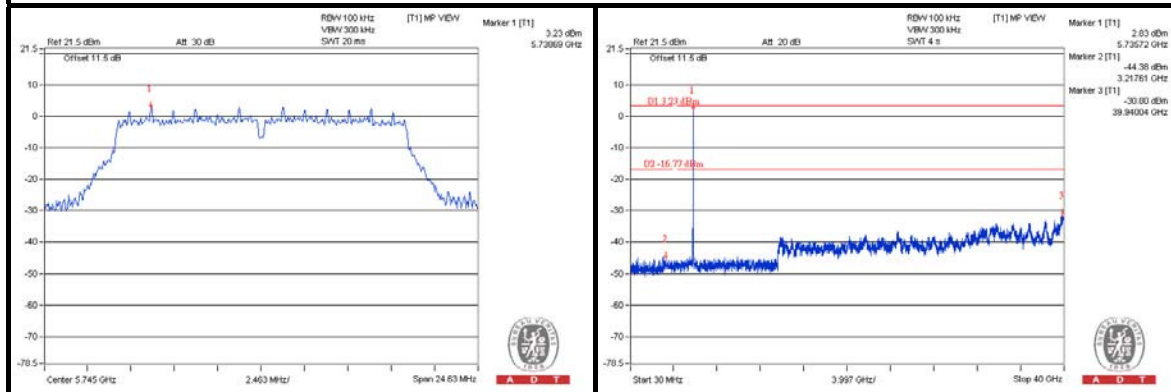

CH 157

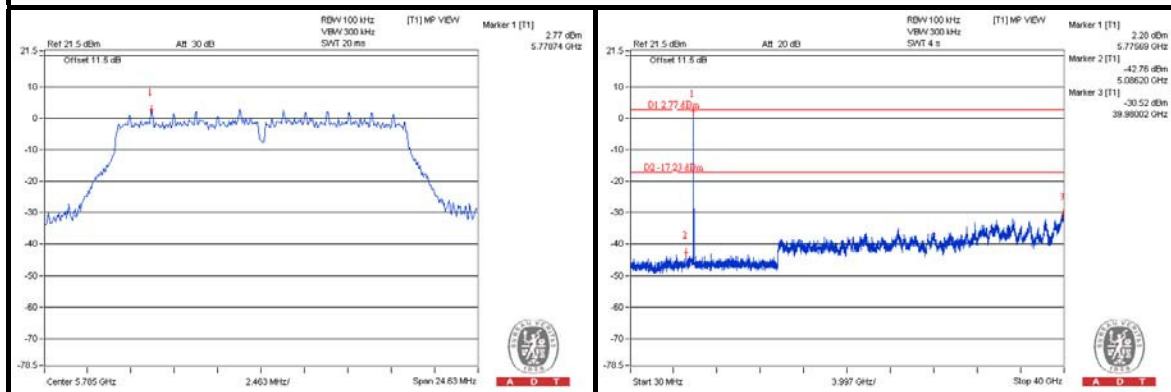

CH 165

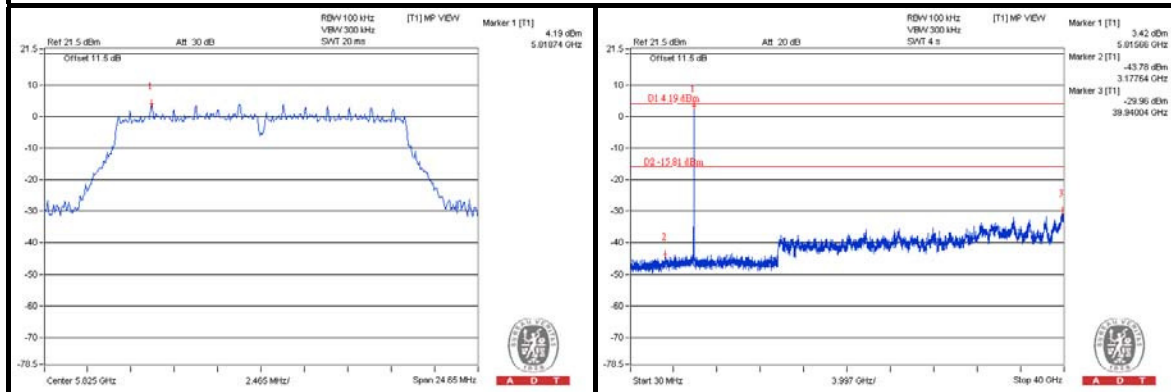





A D T

### CHAIN 1


#### CH 149

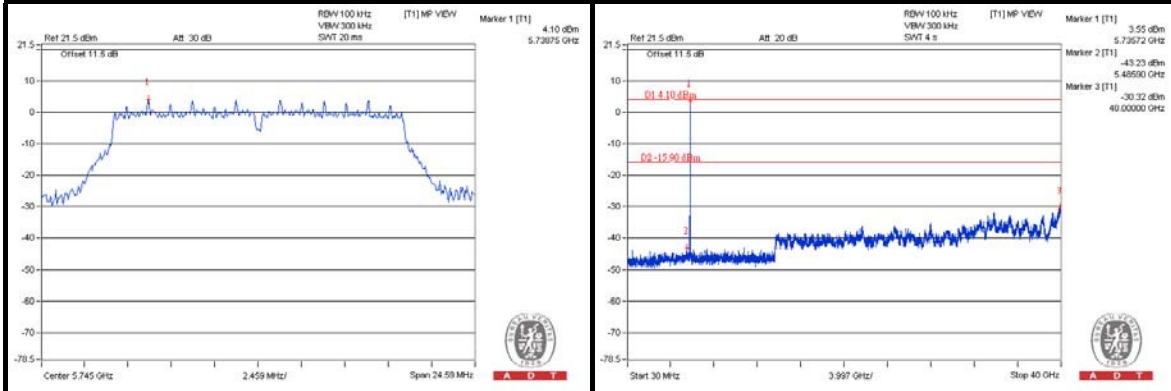

#### CH 157

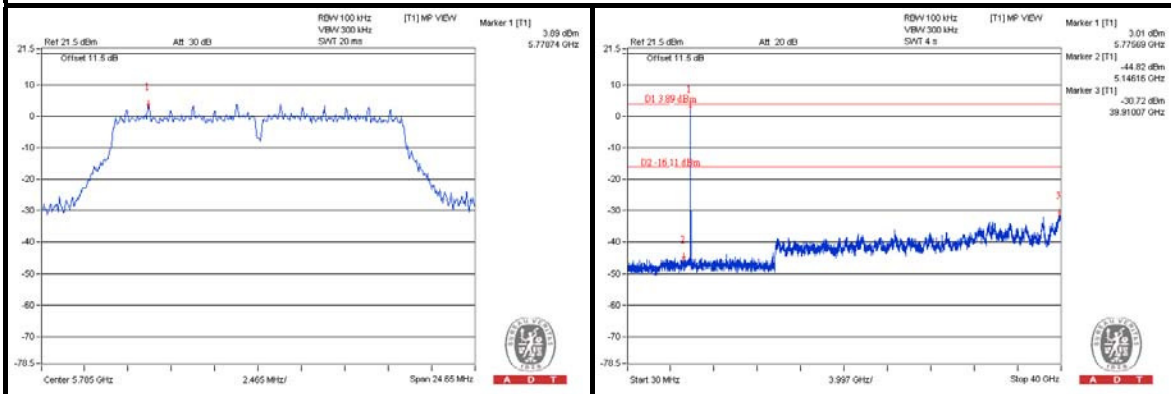

#### CH 165

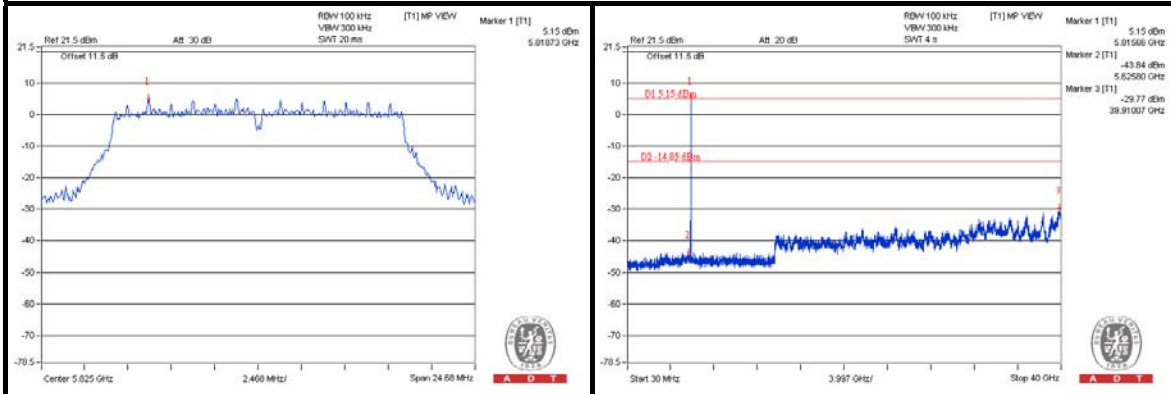







A D T

## CHAIN 2


### CH 149

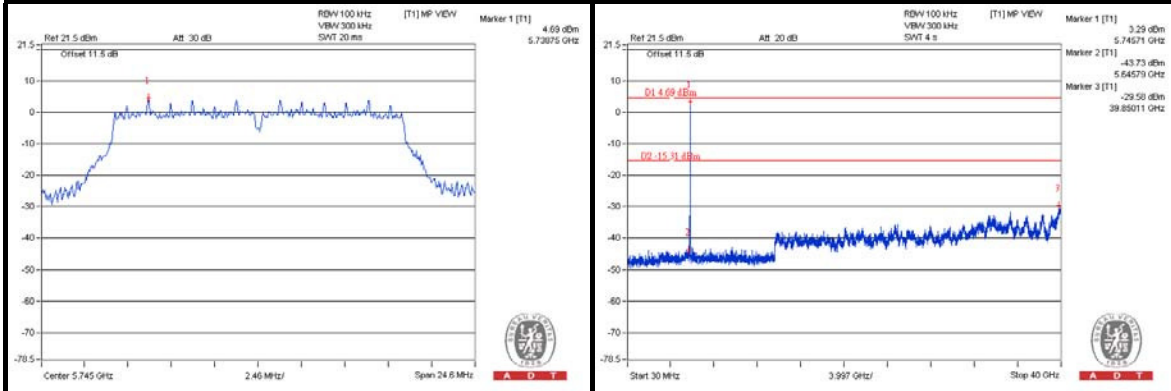

### CH 157

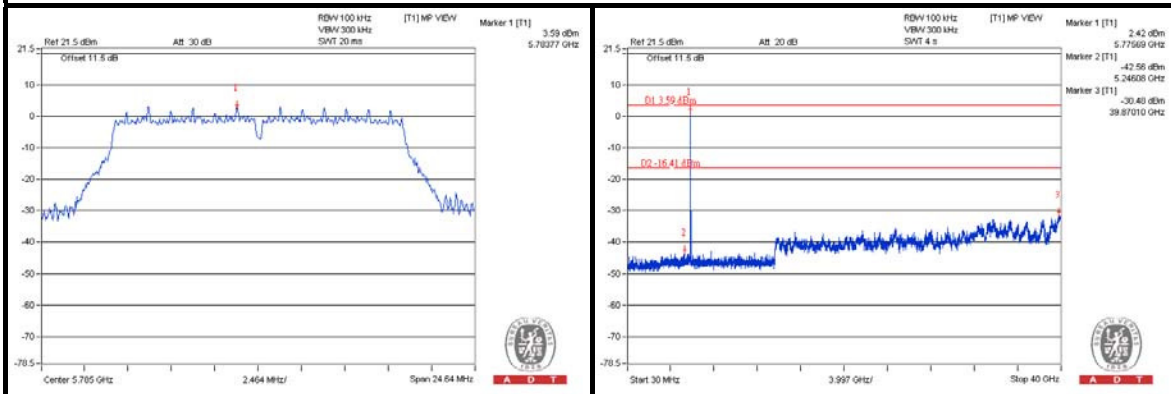

### CH 165

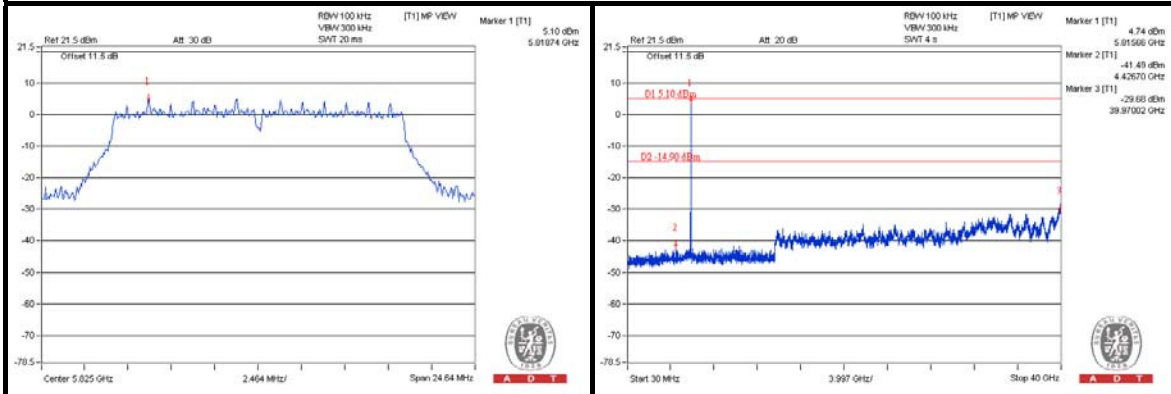




A D T


### 802.11n (20MHz)

### CHAIN 0


#### CH 149

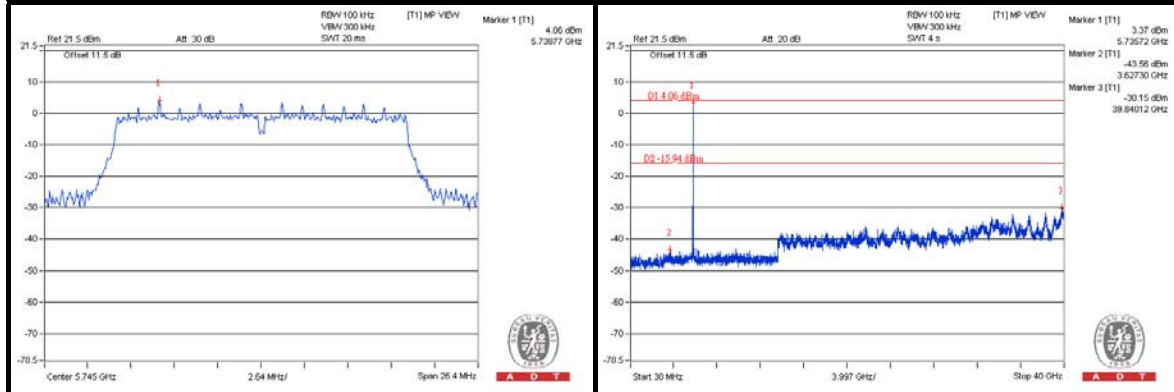

#### CH 157

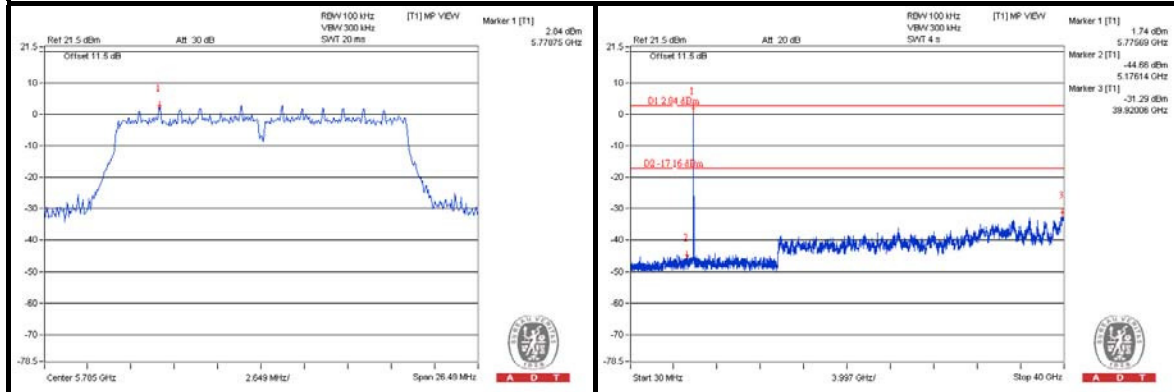


#### CH 165

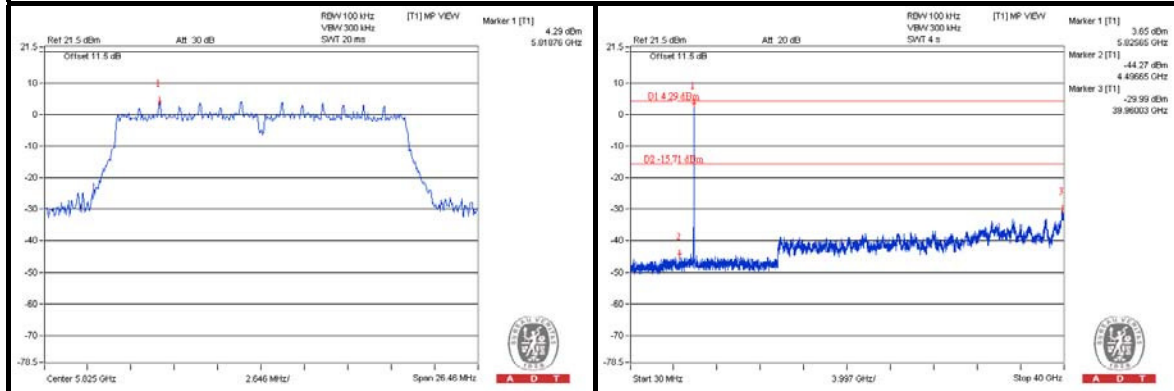


CHAIN 1


CH 149

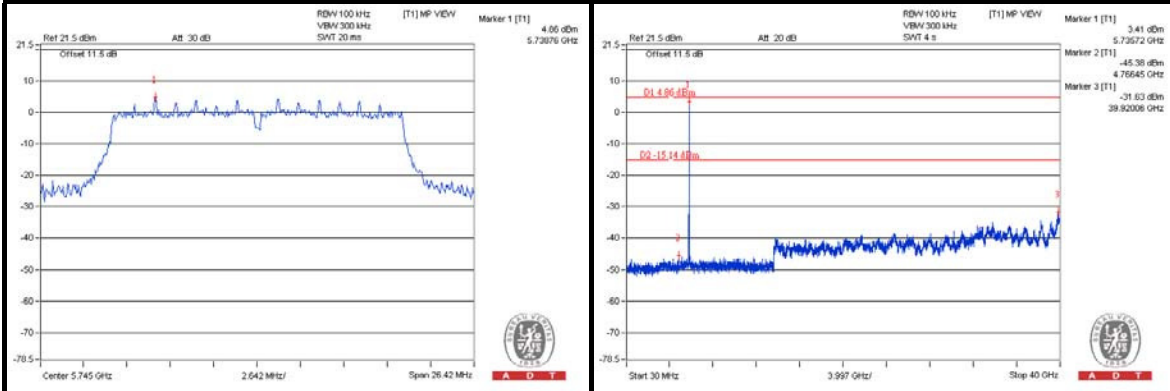

CH 157

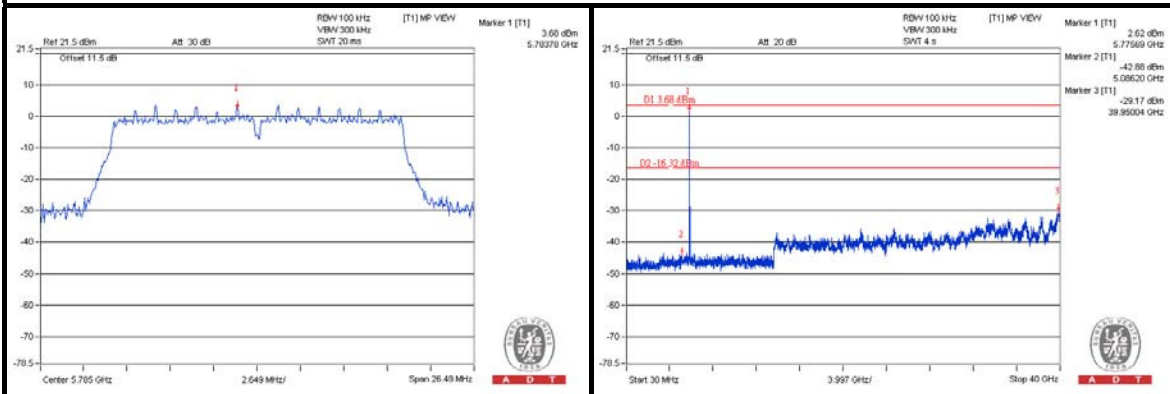

CH 165


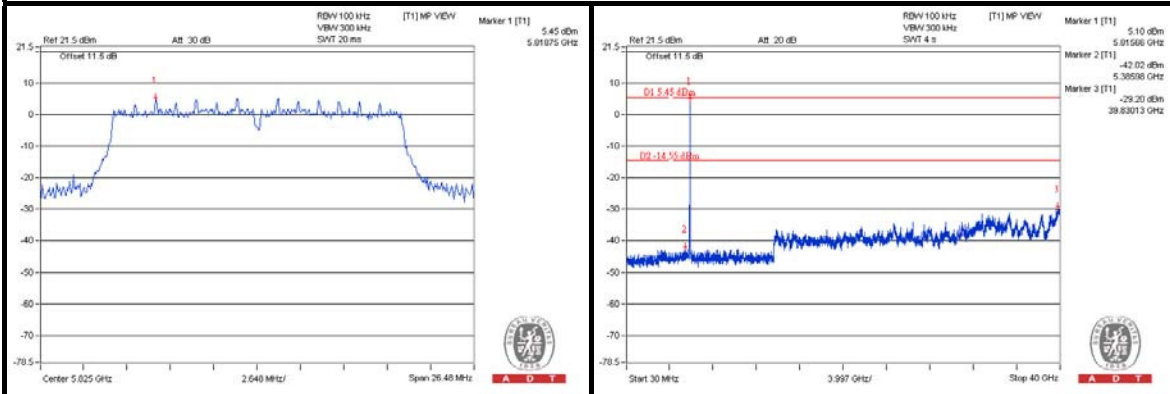






A D T

## CHAIN 2



### CH 149

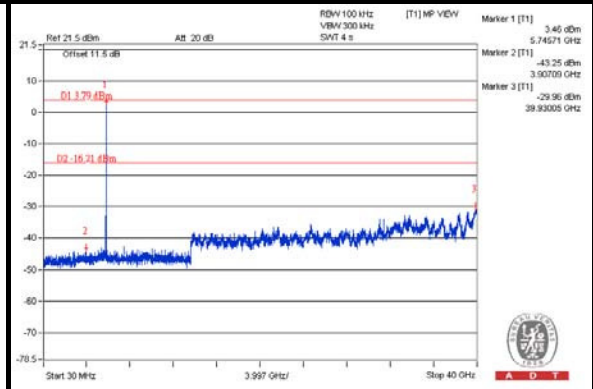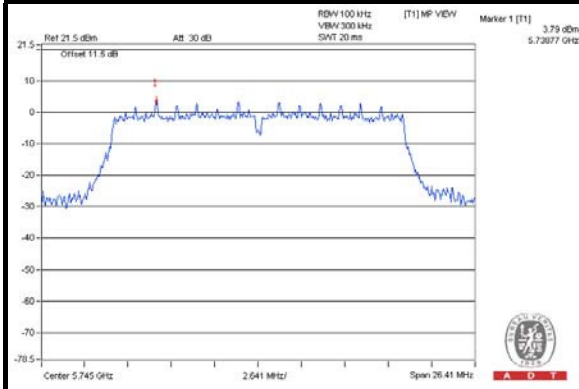

### CH 157

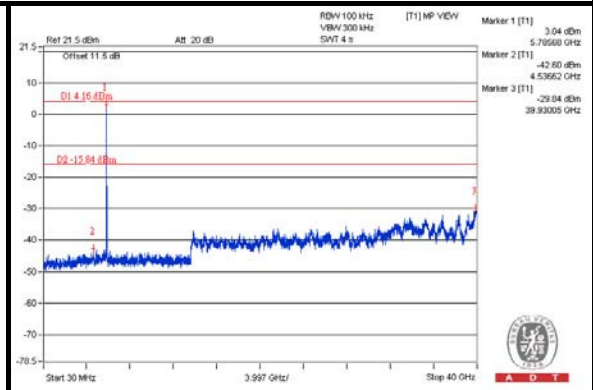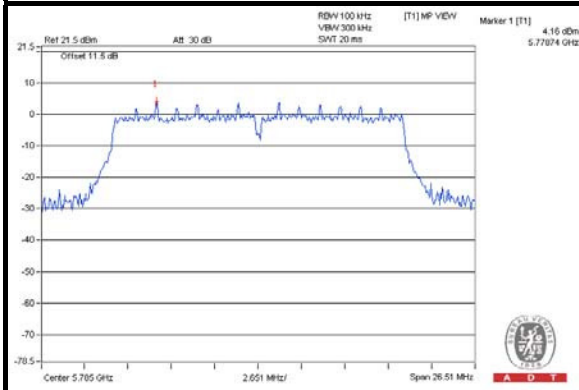

### CH 165

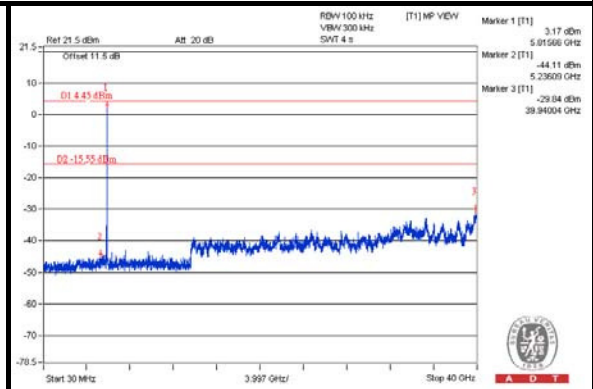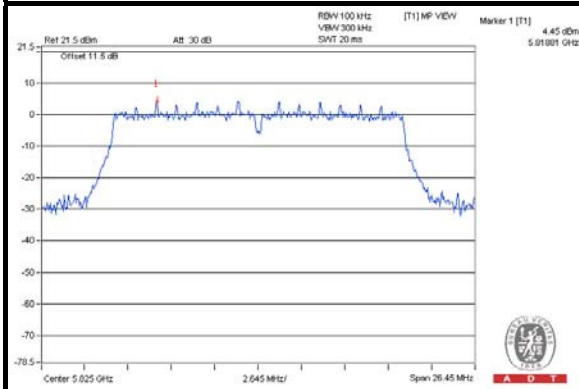




A D T


### 802.11n (40MHz)

### CHAIN 0

#### CH 151

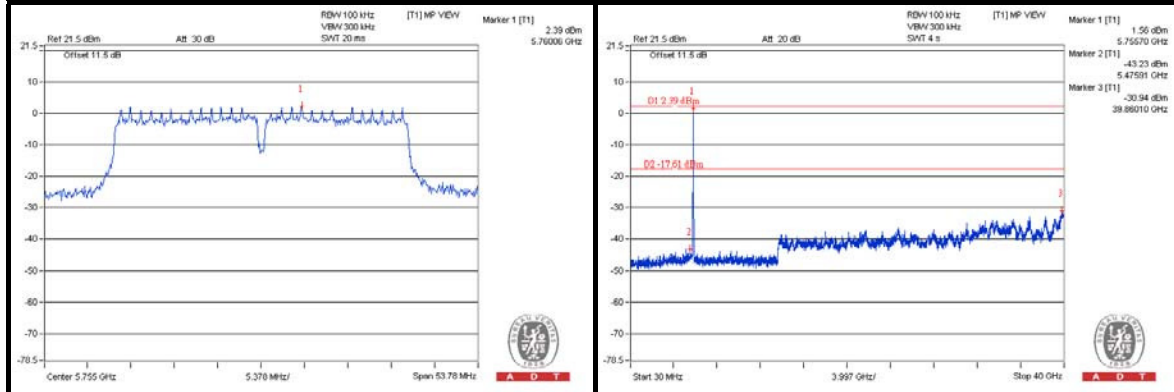

#### CH 159

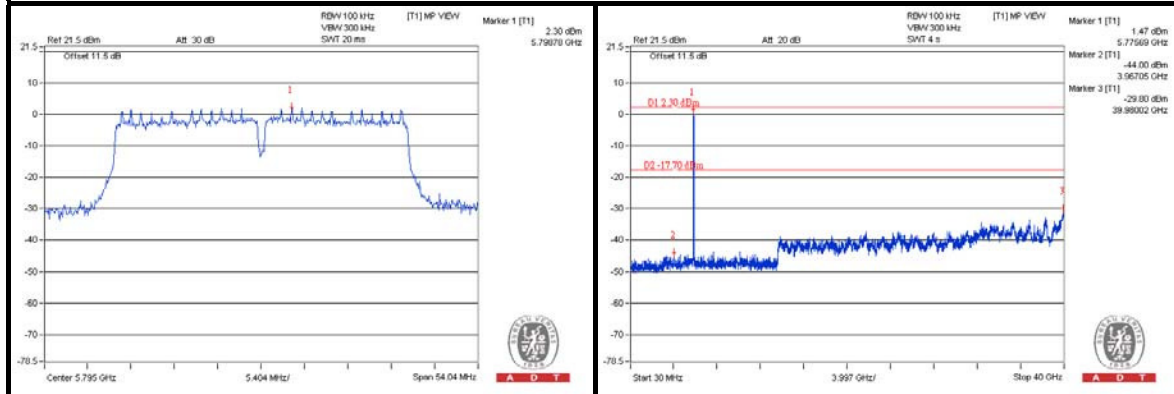





A D T

### CHAIN 1

#### CH 151

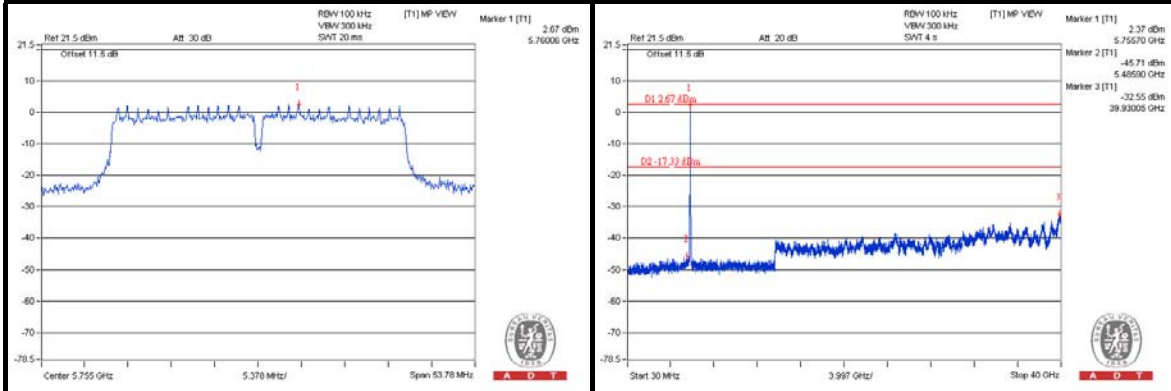

#### CH 159

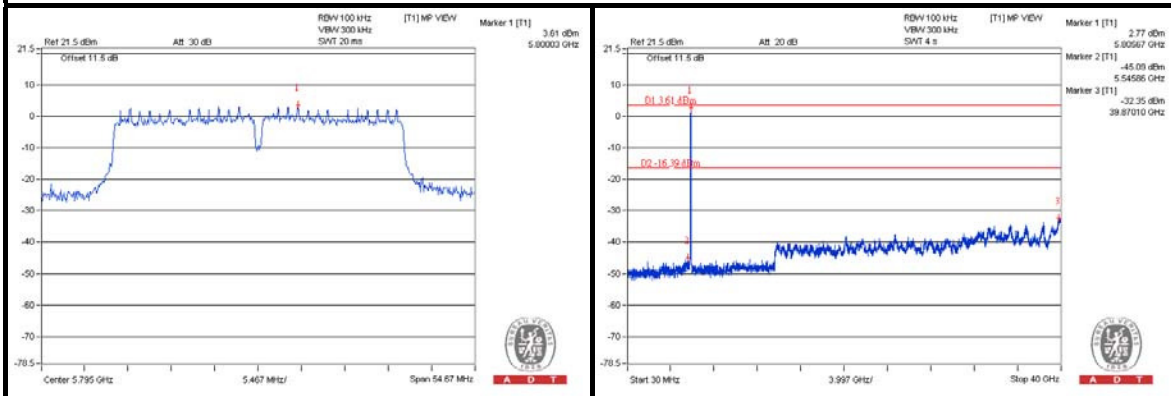





A D T

## CHAIN 2

### CH 151

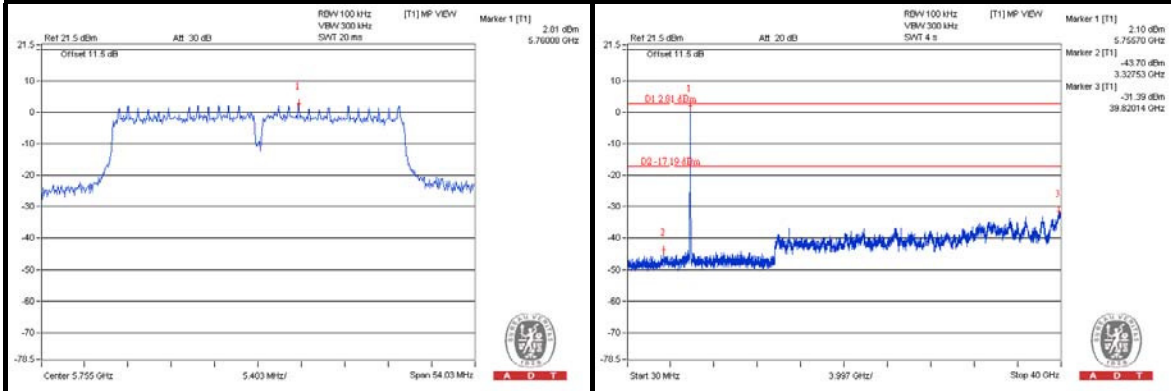

### CH 159

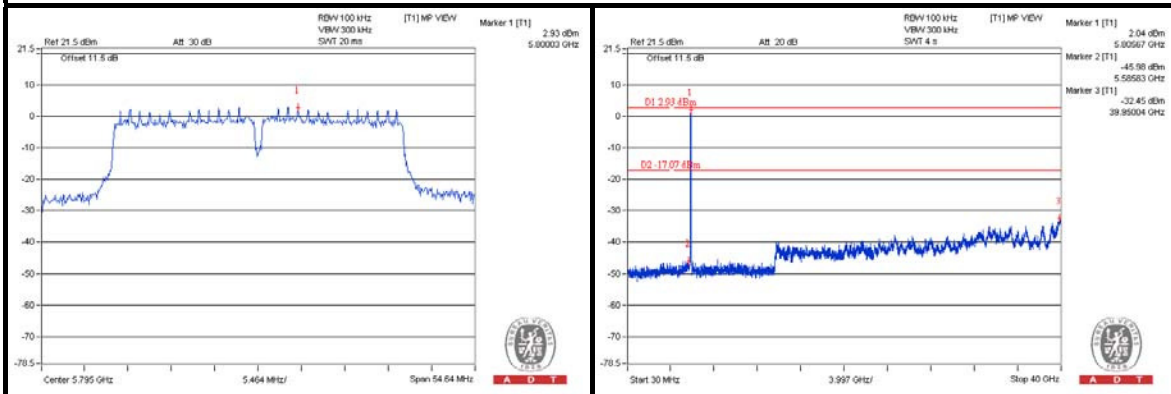



A D T

## 6. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).





A D T

## 7. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF Lab**

Tel: 886-3-5935343

Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety/Telecom Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.



A D T

## 8. APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

---END---