



BUREAU  
VERITAS

Test Report No.: RF161208N040



Test Lab  
Cert 2951.01

## TEST REPORT

Applicant	TP-Link Technologies Co., Ltd.
Address	Building 24 (floors 1,3,4,5) and 28 (floors1-4) Central Science and Technology Park, Shennan Rd, Nanshan, Shenzhen, China

Manufacturer or Supplier	TP-Link Technologies Co., Ltd.
Address	Building 24 (floors 1,3,4,5) and 28 (floors1-4) Central Science and Technology Park, Shennan Rd, Nanshan, Shenzhen, China
Product	300Mbps Wireless N Access Point
Brand Name	TP-Link
Model	TL-WA801ND
Additional Model & Model Difference	N/A
Date of tests	Dec. 08, 2016 ~ Jan. 12, 2017

The tests have been carried out according to the requirements of the following standard:

**FCC Part 15, Subpart C, Section 15.247**

**CONCLUSION: The submitted sample was found to COMPLY with the test requirement**

Tested by Harry Li  
Project Engineer/ EMC Department

Approved by Glyn He  
Supervisor / EMC Department

Date: Jan. 17, 2017

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie  
Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



# TABLE OF CONTENTS

**RELEASE CONTROL RECORD ..... 4**

**1 SUMMARY OF TEST RESULTS ..... 5**

**2 MEASUREMENT UNCERTAINTY ..... 5**

**3 GENERAL INFORMATION ..... 6**

3.1 GENERAL DESCRIPTION OF EUT ..... 6

3.2 DESCRIPTION OF TEST MODES ..... 7

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST ..... 8

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL ..... 8

3.3 DUTY CYCLE OF TEST SIGNAL ..... 11

3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS ..... 12

3.5 DESCRIPTION OF SUPPORT UNITS ..... 12

**4 TEST TYPES AND RESULTS ..... 13**

4.1 CONDUCTED EMISSION MEASUREMENT ..... 13

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT ..... 13

4.1.2 TEST INSTRUMENTS ..... 13

4.1.3 TEST PROCEDURES ..... 14

4.1.4 DEVIATION FROM TEST STANDARD ..... 14

4.1.5 TEST SETUP ..... 15

4.1.6 EUT OPERATING CONDITIONS ..... 15

4.1.7 TEST RESULTS ..... 16

4.2 RADIATED EMISSION MEASUREMENT ..... 18

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT ..... 18

4.2.2 TEST INSTRUMENTS ..... 19

4.2.3 TEST PROCEDURES ..... 20

4.2.4 DEVIATION FROM TEST STANDARD ..... 20

4.2.5 TEST SETUP ..... 21

4.2.6 EUT OPERATING CONDITIONS ..... 22

4.2.7 TEST RESULTS ..... 23

4.3 6dB BANDWIDTH MEASUREMENT ..... 25

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT ..... 45

4.3.2 TEST INSTRUMENTS ..... 45

4.3.3 TEST PROCEDURE ..... 45

4.3.4 DEVIATION FROM TEST STANDARD ..... 45



4.3.5	TEST SETUP .....	46
4.3.6	EUT OPERATING CONDITIONS .....	46
4.3.7	TEST RESULTS .....	47
4.4	CONDUCTED OUTPUT POWER .....	51
4.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT .....	51
4.4.2	TEST SETUP .....	51
4.4.3	TEST INSTRUMENTS.....	51
4.4.4	TEST PROCEDURES .....	52
4.4.5	DEVIATION FROM TEST STANDARD .....	52
4.4.6	EUT OPERATING CONDITIONS .....	52
4.4.7	TEST RESULTS .....	53
4.5	POWER SPECTRAL DENSITY MEASUREMENT .....	55
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT .....	55
4.5.2	TEST SETUP .....	55
4.5.3	TEST INSTRUMENTS.....	55
4.5.4	TEST PROCEDURE .....	55
4.5.5	DEVIATION FROM TEST STANDARD .....	55
4.5.6	EUT OPERATING CONDITION .....	56
4.5.7	TEST RESULTS .....	56
4.6	OUT OF BAND EMISSION MEASUREMENT .....	60
4.6.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT .....	60
4.6.2	TEST SETUP .....	60
4.6.3	TEST INSTRUMENTS.....	60
4.6.4	TEST PROCEDURE .....	60
4.6.5	DEVIATION FROM TEST STANDARD .....	61
4.6.6	EUT OPERATING CONDITION .....	61
4.6.7	TEST RESULTS .....	62
<b>5</b>	<b>PHOTOGRAPHS OF THE TEST CONFIGURATION .....</b>	<b>74</b>
<b>6</b>	<b>APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....</b>	<b>75</b>



**BUREAU**  
**VERITAS**

Test Report No.: RF161208N040

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF161208N040	Original release	Jan. 17, 2017



## 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit.
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Unique antenna connector is used

## 2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.70dB
Radiated emissions	9KHz ~ 30MHz	2.90dB
	30MHz ~ 1GMHz	3.83dB
	1GHz ~ 18GHz	4.93dB
	18GHz ~ 40GHz	4.80dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .



### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	300Mbps Wireless N Access Point
<b>MODEL NO.</b>	TL-WA801ND
<b>FCC ID</b>	TE7WA801NDV5
<b>NOMINAL VOLTAGE</b>	DC 9V From Adapter
<b>MODULATION TYPE</b>	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
<b>MODULATION TECHNOLOGY</b>	DSSS, OFDM
<b>OPERATING FREQUENCY</b>	2412-2462MHz for 11b/g/n(HT20) 2422-2452MHz for 11n(HT40)
<b>AVERAGE POWER</b>	21.45dBm (Measured Average Power)
<b>ANTENNA TYPE</b>	Dipole Antenna; 4.32dBi gain
<b>I/O PORTS</b>	Refer to user's manual
<b>CABLE SUPPLIED</b>	N/A

**NOTE:**

1. The EUT incorporates a MIMO function. Physically, the EUT provides two transmitters and two receivers.

MODULATION MODE	FUNCTION
802.11b	2TX/2RX
802.11g	2TX/2RX
802.11n (HT20)	2TX/2RX
802.11n (HT40)	2TX/2RX

2. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
4. Please refer to the EUT photo document (Reference No.: 161208N040) for detailed product photo.
5. The EUT was powered by the following adapter:

ADAPTER	
BRAND:	TP-Link
MODEL:	T090060-2B1
INPUT:	AC 100-240V, 50/60Hz 0.3A Max.
OUTPUT:	DC 9V, 0.6A
AC LINE:	Unshielded, Detachable, 1.5m.



### 3.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g and 802.11n(HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

7 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		



### 3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.

### 3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on X axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				MODE
	RE<1G	RE≥1G	PLC	APCM	
-	√	√	√	√	<b>Powered by Adapter with WIFI function</b>

Where **RE<1G**: Radiated Emission below 1GHz      **RE≥1G**: Radiated Emission above 1GHz  
**PLC**: Power Line Conducted Emission      **APCM**: Antenna Port Conducted Measurement

#### **POWER LINE CONDUCTED EMISSION TEST:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	TESTED CONDITION
-	WIFI (2.4G) Link

#### **RADIATED EMISSION TEST (BELOW 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
802.11g	1 to 11	1	OFDM	BPSK	6.0	X





**RADIATED EMISSION TEST (ABOVE 1GHz):**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS	ANT PORT
802.11b	1 to 11	1,2, 6, 10,11	DSSS	DBPSK	1.0	X	ANT 0+1
802.11g	1 to 11	1,2, 6, 10,11	OFDM	BPSK	6.0	X	ANT 0+1
802.11n HT20	1 to 11	1,2, 6, 10,11	OFDM	BPSK	6.5	X	ANT 0+1
802.11n HT40	3 to 9	3,4, 6, 8,9	OFDM	BPSK	13.5	X	ANT 0+1

**BANDEDGE MEASUREMENT:**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	ANT PORT
802.11b	1 to 11	1, 11	DSSS	DBPSK	1.0	ANT 0+1
802.11g	1 to 11	1, 11	OFDM	BPSK	6.0	ANT 0+1
802.11n HT20	1 to 11	1, 11	OFDM	BPSK	6.5	ANT 0+1
802.11n HT40	3 to 9	3, 9	OFDM	BPSK	13.5	ANT 0+1



**ANTENNA PORT CONDUCTED MEASUREMENT:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n HT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5

**TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE	TESTED BY
RE<1G	25deg. C, 53%RH	DC 9V From Adapter	Cheng Zhong
RE≥1G	25deg. C, 53%RH	DC 9V From Adapter	Cheng Zhong
PLC	20deg. C, 56%RH	DC 9V From Adapter	Yang
APCM	20deg. C, 55%RH	DC 9V From Adapter	Robert Cheng




### 3.3 DUTY CYCLE OF TEST SIGNAL

#### Chain 0:

Duty cycle of test signal is 100 %

#### Chain 1:

Duty cycle of test signal is 100 %

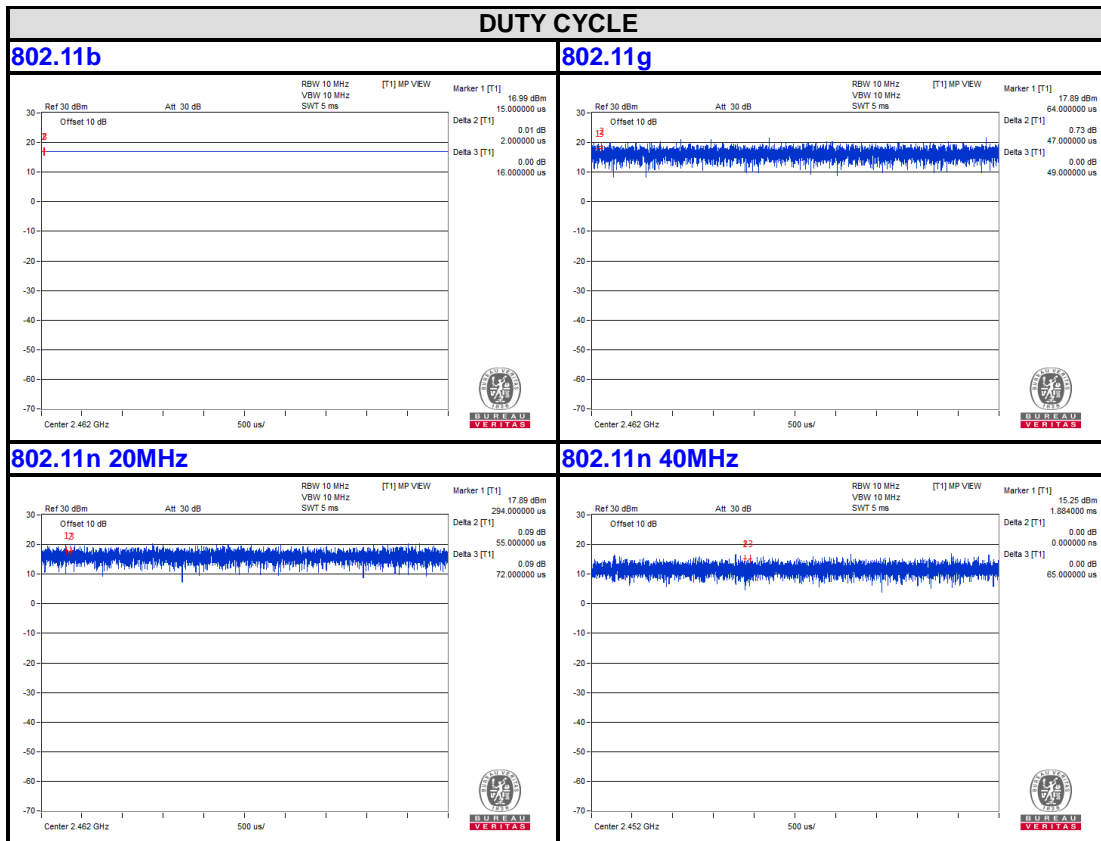



### **3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS**

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C, Section 15.247**

**KDB 558074 D01 DTS Meas Guidance v03r05**

**KDB 662911 D01 v02r01**

**ANSI C63.10-2013**

All test items have been performed and recorded as per the above standards.

**NOTE:** It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B(DoC). The test report has been issued separately.

### **3.5 DESCRIPTION OF SUPPORT UNITS**

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

<b>NO.</b>	<b>PRODUCT</b>	<b>BRAND</b>	<b>MODEL NO.</b>	<b>SERIAL NO.</b>	<b>FCC ID</b>
1	Notebook	DELL	5P2PM2X	12400120329	N/A
2	Notebook	DELL	E6400	X16-96100	N/A

<b>NO.</b>	<b>SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS</b>
1	AC Line: Unshielded, Detachable 1.8m; DC Line: Unshielded, Detachable 1.8m;
2	AC Line: Unshielded, Detachable 1.8m; DC Line: Unshielded, Detachable 1.8m;
3	RJ45 Line: Unshielded, 1m; 10m;

**Remarks:** Notebook PC is distal support units.



## 4 TEST TYPES AND RESULTS

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
  3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101588	Jan. 22,16	Jan. 21,17
Artificial Mains Network	Rohde&Schwarz	ENV216	101173	Mar. 04,16	Mar. 03,17
Artificial Mains Network	Rohde&Schwarz	ESH3-Z5	100317	Apr. 05,16	Apr. 04,17
Voltage probe	SCHWARZBECK	TK 9421	TK 9421-176	Jan. 08,16	Jan. 07,17
Test software	ADT	ADT_Cond_V7.3.7	N/A	N/A	N/A

- NOTE:**
1. The test was performed in shielded room 553.
  2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



#### 4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.


**NOTE:** All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation.



#### 4.1.5 TEST SETUP

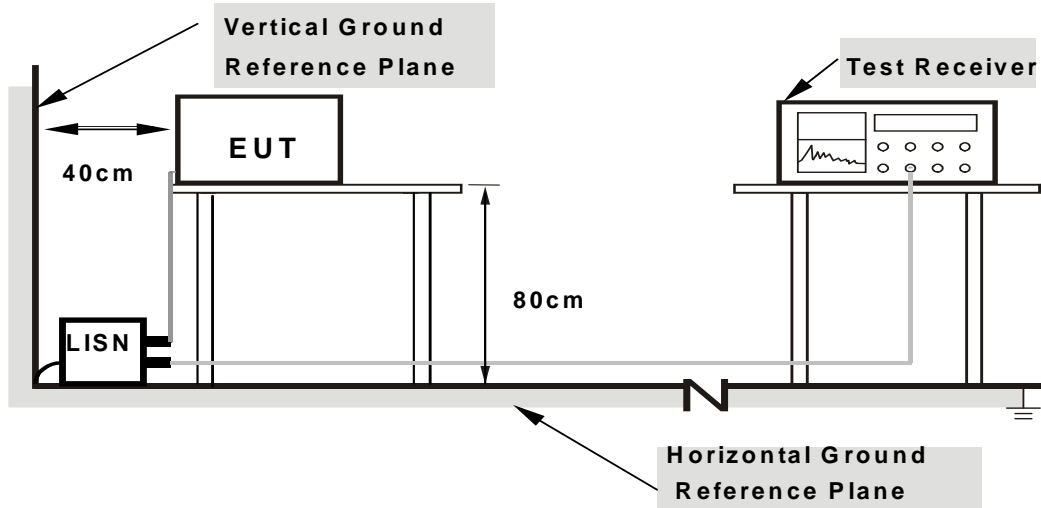

- Note:**
- 1.Support units were connected to second LISN.
  - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.




### 4.1.7 TEST RESULTS

**CONDUCTED WORST-CASE DATA: WIFI link mode**

<b>PHASE</b>	Line	<b>6dB BANDWIDTH</b>	9kHz
--------------	------	----------------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.41854	10.24	38.04	30.48	48.28	40.72	57.48	47.48	-9.20	-6.76
2	3.75000	10.40	30.99	19.48	41.39	29.88	56.00	46.00	-14.61	-16.12
3	6.24975	10.43	34.60	21.51	45.03	31.94	60.00	50.00	-14.97	-18.06
4	8.74950	10.47	40.31	26.92	50.78	37.39	60.00	50.00	-9.22	-12.61
5	10.00050	10.50	41.77	28.67	52.27	39.17	60.00	50.00	-7.73	-10.83
6	11.24925	10.51	36.11	23.03	46.62	33.54	60.00	50.00	-13.38	-16.46

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

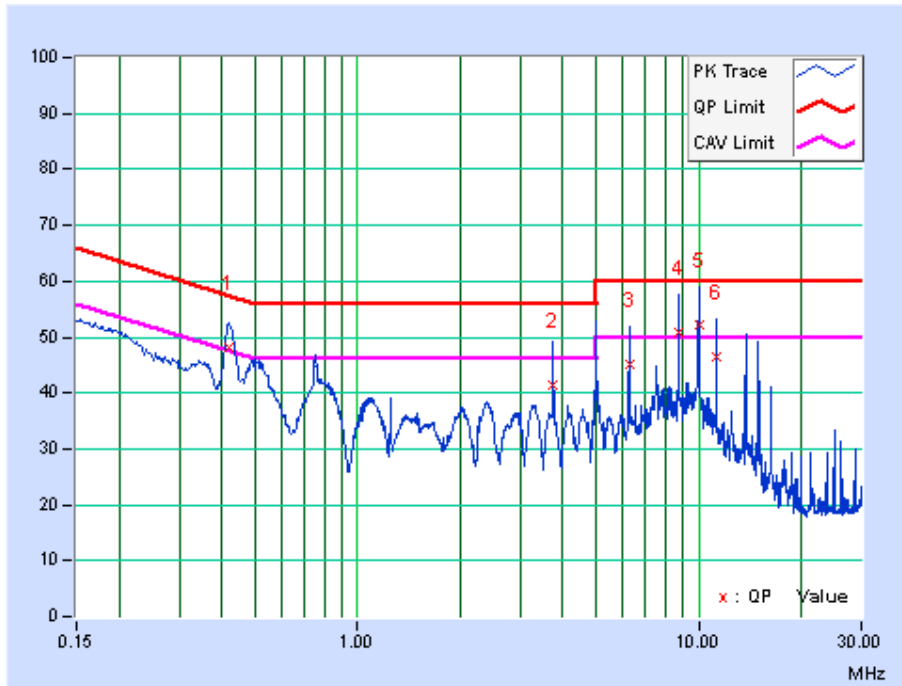






<b>PHASE</b>	Neutral	<b>6dB BANDWIDTH</b>	9kHz
--------------	---------	----------------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.86	36.23	19.87	46.09	29.73	66.00	56.00	-19.91	-26.27
2	0.42298	9.91	33.15	20.17	43.06	30.08	57.39	47.39	-14.33	-17.31
3	0.75075	9.96	24.32	10.06	34.28	20.02	56.00	46.00	-21.72	-25.98
4	8.74950	10.35	36.83	21.25	47.18	31.60	60.00	50.00	-12.82	-18.40
5	10.00050	10.38	39.21	23.59	49.59	33.97	60.00	50.00	-10.41	-16.03
6	11.24925	10.42	33.74	19.44	44.16	29.86	60.00	50.00	-15.84	-20.14

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

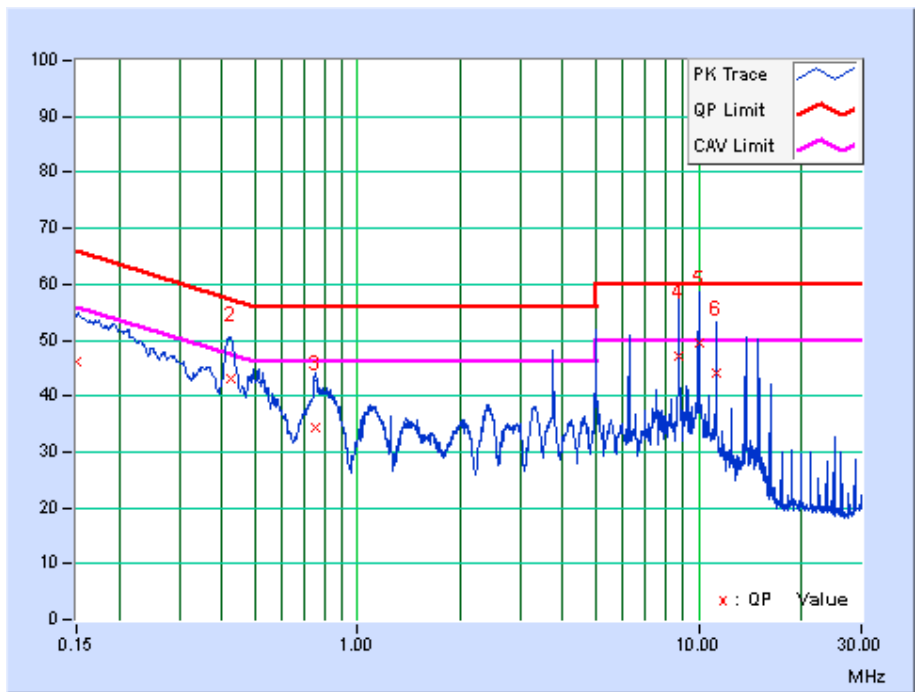



## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



#### 4.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Apr. 05,16	Apr. 04,17
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV7	102331	Nov. 04,16	Nov. 03,17
Bilog Antenna	Teseq	CBL 6111D	30643	Jul. 14, 16	Jul. 13, 17
Horn Antenna (1GHz -18GHz)	ETS -Lindgren	3117	00062558	May 18,16	May 17,17
GPS Generator+ Antenna	TOJOIN	GNSS-5000A	E1-010119	Aug. 08, 16	Aug. 07, 17
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	Mar. 12,16	Mar. 11,18
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170242	Mar. 12,16	Mar. 11,17
Amplifier (9kHz-1GHz)	SONOMA	310D	186955	Mar. 04,16	Mar. 03, 17
Pre-Amplifier(1-18G)	HP	8449B	3008A00409	Apr. 25,16	Apr. 24,17
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Nov. 04,16	Nov. 03,17
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	Aug. 08,16	Aug. 07,17

**NOTE:**

1. The test was performed in 966 Chamber.
2. The calibration interval of the above test instruments are 12, 24 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
3. The horn antenna is used only for the measurement of emission frequency above 1 GHz if tested.
4. The FCC Site Registration No. is 502831.



#### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 1.5 meters (above 1GHz) and 0.8 meters (below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

#### NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz(Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes, the worst-case test configuration was reported on the file test setup photo.


#### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation.




#### 4.2.5 TEST SETUP

##### Below 1GHz test setup

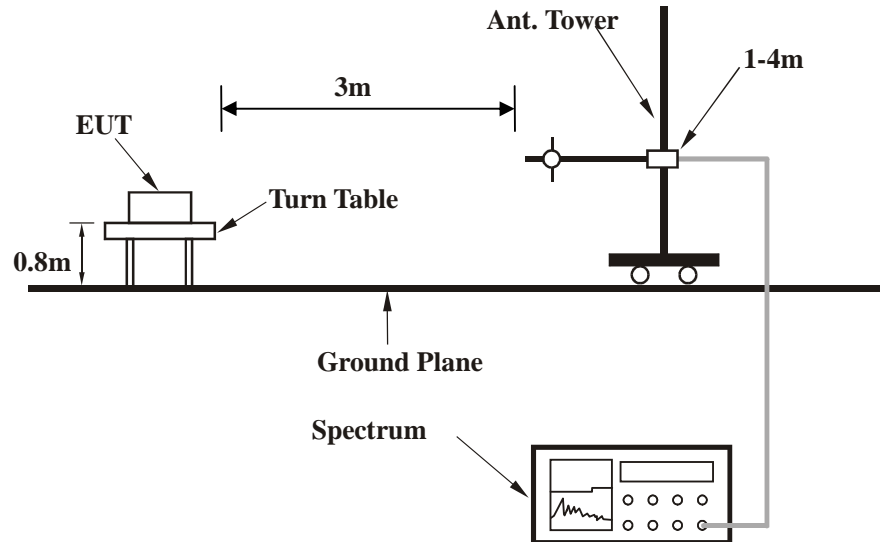

**Note:** For the actual test configuration, please refer to the attached file (Test Setup Photo).

##### Above 1GHz test setup

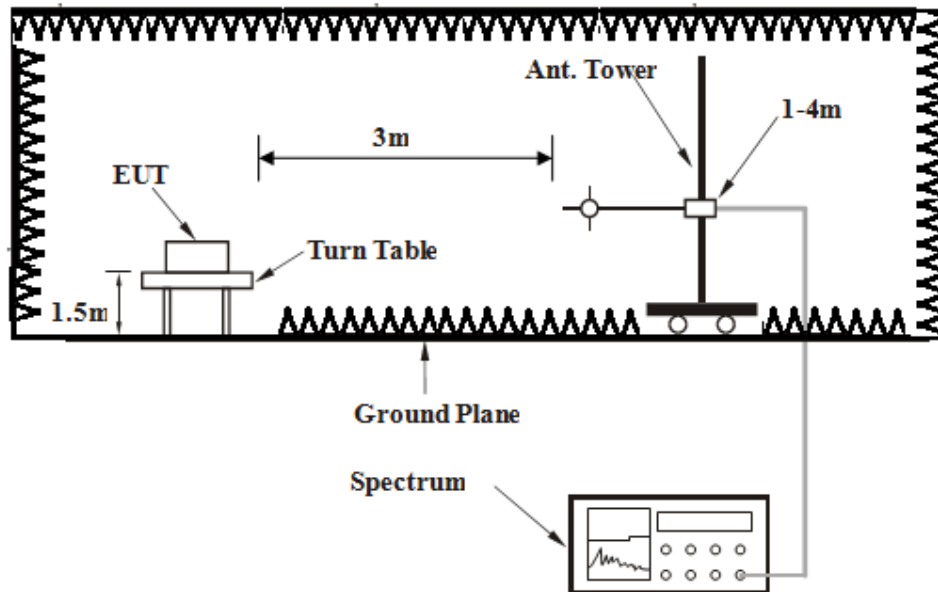

**Note:** For the actual test configuration, please refer to the attached file (Test Setup Photo).



#### 4.2.6 EUT OPERATING CONDITIONS

- a. Set the EUT under full load condition and placed them on a testing table.
- b. Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- c. The necessary accessories enable the EUT in full functions.



### 4.2.7 TEST RESULTS

#### BELOW 1GHz WORST-CASE DATA:


802.11g

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	105.91	26.96 QP	43.50	-16.54	2.00 H	0	45.06	-18.10
2	198.70	29.22 QP	43.50	-14.28	2.00 H	0	48.48	-19.26
3	264.77	29.72 QP	46.00	-16.28	2.00 H	0	42.71	-12.99
4	579.67	37.82 QP	46.00	-8.18	2.00 H	0	41.92	-4.10
5	813.03	33.21 QP	46.00	-12.79	2.00 H	0	33.39	-0.18
6	915.65	35.21 QP	46.00	-10.79	2.00 H	0	33.47	1.74

#### REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

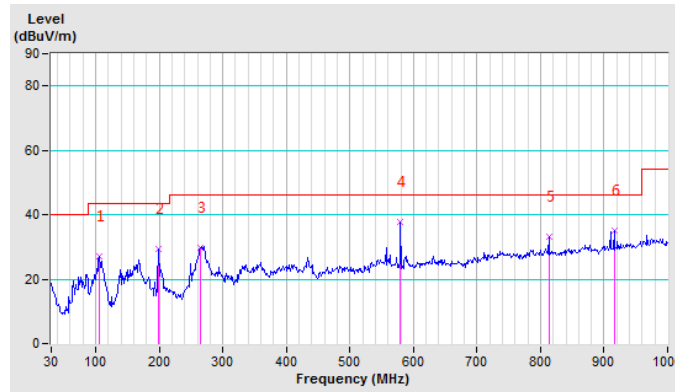




<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	29.86 QP	40.00	-10.14	1.00 V	0	41.13	-11.27
2	65.14	34.20 QP	40.00	-5.80	1.00 V	0	58.89	-24.69
<b>3</b>	<b>105.91</b>	<b>38.42 QP</b>	<b>43.50</b>	<b>-5.08</b>	<b>1.00 V</b>	<b>0</b>	<b>56.52</b>	<b>-18.10</b>
4	136.84	31.29 QP	43.50	-12.21	1.00 V	0	48.54	-17.25
5	150.90	32.24 QP	43.50	-11.26	1.00 V	0	48.79	-16.55
6	550.14	31.63 QP	46.00	-14.37	1.00 V	0	35.63	-4.00

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

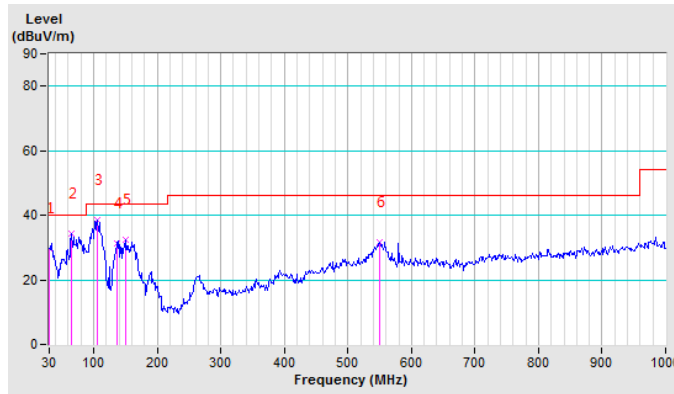





ABOVE 1GHz DATA

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.61 PK	74.00	-18.39	1.12 H	206	52.47	3.14
2	2390.00	43.35 AV	54.00	-10.65	1.12 H	206	40.21	3.14
3	*2412.00	102.92 PK			2.11 H	311	99.75	3.17
4	*2412.00	99.87 AV			2.11 H	311	96.70	3.17
5	4824.00	47.55 PK	74.00	-26.45	1.00 H	120	41.08	6.47
6	4824.00	45.66 AV	54.00	-8.34	1.00 H	120	39.19	6.47
7	#7236.00	48.80 PK	72.92	-24.12	1.52 H	348	36.67	12.13
8	#7236.00	41.16 AV	69.87	-28.71	1.52 H	348	29.03	12.13

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.84 PK	74.00	-14.16	1.00 V	148	56.70	3.14
2	2390.00	53.31 AV	54.00	-0.69	1.00 V	148	50.17	3.14
3	*2412.00	115.63 PK			1.00 V	61	112.46	3.17
4	*2412.00	111.03 AV			1.00 V	61	107.86	3.17
5	4824.00	48.38 PK	74.00	-25.62	1.49 V	134	41.91	6.47
6	4824.00	45.96 AV	54.00	-8.04	1.49 V	134	39.49	6.47
7	#7236.00	53.96 PK	85.63	-31.67	1.53 V	96	41.83	12.13
8	#7236.00	49.22 AV	81.03	-31.81	1.53 V	96	37.09	12.13

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	51.39 PK	74.00	-22.61	1.00 H	78	13.40	37.99
2	2390.00	43.12 AV	54.00	-10.88	1.00 H	78	5.13	37.99
3	*2437.00	100.77 PK			1.00 H	78	62.68	38.09
4	*2437.00	97.31 AV			1.00 H	78	59.22	38.09
5	2483.50	53.04 PK	74.00	-20.96	1.00 H	78	14.85	38.19
6	4874.00	47.10 PK	74.00	-26.90	2.10 H	119	5.55	41.55
7	4874.00	45.44 AV	54.00	-8.56	2.10 H	119	3.89	41.55
8	7311.00	52.11 PK	74.00	-21.89	1.91 H	350	6.51	45.60
9	7311.00	45.38 AV	54.00	-8.62	1.91 H	350	-0.22	45.60
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.91 PK	74.00	-18.09	1.00 V	116	17.92	37.99
2	2390.00	45.13 AV	54.00	-8.87	1.00 V	116	7.14	37.99
3	*2437.00	115.08 PK			1.00 V	116	76.99	38.09
4	*2437.00	111.65 AV			1.00 V	116	73.56	38.09
5	2483.50	56.55 PK	74.00	-17.45	1.00 V	116	18.36	38.19
6	4874.00	51.70 PK	74.00	-22.30	1.45 V	135	10.15	41.55
7	4874.00	49.61 AV	54.00	-4.39	1.45 V	135	8.06	41.55
8	7311.00	56.81 PK	74.00	-17.19	1.24 V	231	11.21	45.60
9	7311.00	53.21 AV	54.00	-0.79	1.24 V	231	7.61	45.60

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	98.07 PK			1.49 H	82	94.81	3.26
2	*2462.00	96.01 AV			1.49 H	82	92.75	3.26
3	2483.50	52.58 PK	74.00	-21.42	1.49 H	82	49.29	3.29
4	2483.50	42.75 AV	54.00	-11.25	1.49 H	82	39.46	3.29
5	4924.00	52.00 PK	74.00	-22.00	1.42 H	163	45.51	6.49
6	4924.00	48.51 AV	54.00	-5.49	1.42 H	163	42.02	6.49
7	7386.00	58.57 PK	74.00	-15.43	1.26 H	203	46.27	12.30
8	7386.00	50.76 AV	54.00	-3.24	1.26 H	203	38.46	12.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	114.44 PK			1.48 V	0	111.18	3.26
2	*2462.00	111.72 AV			1.48 V	0	108.46	3.26
3	2483.50	60.69 PK	74.00	-13.31	1.00 V	93	57.40	3.29
4	2483.50	53.54 AV	54.00	-0.46	1.00 V	93	50.25	3.29
5	4924.00	47.30 PK	74.00	-26.70	2.03 V	201	40.81	6.49
6	4924.00	43.87 AV	54.00	-10.13	2.03 V	201	37.38	6.49
7	7386.00	51.44 PK	74.00	-22.56	1.48 V	95	39.14	12.30
8	7386.00	45.32 AV	54.00	-8.68	1.48 V	95	33.02	12.30

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



802.11g

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	63.86 PK	74.00	-10.14	2.76 H	256	60.72	3.14
2	2390.00	46.32 AV	54.00	-7.68	2.76 H	256	43.18	3.14
3	*2412.00	106.27 PK			3.14 H	284	103.10	3.17
4	*2412.00	97.49 AV			3.14 H	284	94.32	3.17
5	4824.00	49.72 PK	74.00	-24.28	2.15 H	303	43.25	6.47
6	4824.00	38.09 AV	54.00	-15.91	2.15 H	303	31.62	6.47
7	#7236.00	56.32 PK	76.27	-19.95	1.00 H	235	44.19	12.13
8	#7236.00	44.98 AV	67.49	-22.51	1.00 H	235	32.85	12.13

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	72.96 PK	74.00	-1.04	1.13 V	26	69.82	3.14
2	2390.00	53.19 AV	54.00	-0.81	1.13 V	26	50.05	3.14
3	*2412.00	115.62 PK			1.00 V	154	112.45	3.17
4	*2412.00	106.50 AV			1.00 V	154	103.33	3.17
5	4824.00	48.57 PK	74.00	-25.43	1.06 V	24	42.10	6.47
6	4824.00	36.27 AV	54.00	-17.73	1.06 V	24	29.80	6.47
7	#7236.00	56.47 PK	85.62	-29.15	1.15 V	216	44.34	12.13
8	#7236.00	45.39 AV	76.50	-31.11	1.15 V	216	33.26	12.13

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	53.14 PK	74.00	-20.86	2.12 H	310	15.15	37.99
2	2390.00	46.05 AV	54.00	-7.95	2.12 H	310	8.06	37.99
3	*2437.00	105.21 PK			2.12 H	310	67.12	38.09
4	*2437.00	95.93 AV			2.12 H	310	57.84	38.09
5	2483.50	46.46 PK	74.00	-27.54	2.12 H	310	8.27	38.19
6	4874.00	47.31 PK	74.00	-26.69	1.84 H	302	5.76	41.55
7	4874.00	35.18 AV	54.00	-18.82	1.84 H	302	-6.37	41.55
8	7311.00	61.33 PK	74.00	-12.67	1.25 H	231	15.73	45.60
9	7311.00	47.40 AV	54.00	-6.60	1.25 H	231	1.80	45.60

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.65 PK	74.00	-9.35	1.00 V	51	26.66	37.99
2	2390.00	52.11 AV	54.00	-1.89	1.00 V	51	14.12	37.99
3	*2437.00	120.29 PK			1.00 V	51	82.20	38.09
4	*2437.00	110.28 AV			1.00 V	51	72.19	38.09
5	2483.50	63.40 PK	74.00	-10.60	1.00 V	51	25.21	38.19
6	2483.50	51.73 AV	54.00	-2.27	1.00 V	51	13.74	38.19
7	4874.00	47.33 PK	74.00	-26.67	1.62 V	230	5.78	41.55
8	4874.00	38.12 AV	54.00	-15.88	1.62 V	230	-3.43	41.55
9	7311.00	67.90 PK	74.00	-6.10	1.24 V	203	22.30	45.60
10	7311.00	53.44 AV	54.00	-0.56	1.24 V	203	7.84	45.60

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



**BUREAU  
VERITAS**

Test Report No.: RF161208N040

<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	101.77 PK			1.00 H	303	98.51	3.26
2	*2462.00	92.85 AV			1.00 H	303	89.59	3.26
3	2483.50	57.51 PK	74.00	-16.49	1.00 H	289	54.22	3.29
4	2483.50	45.03 AV	54.00	-8.97	1.00 H	289	41.74	3.29
5	4924.00	43.67 PK	74.00	-30.33	1.65 H	223	37.18	6.49
6	4924.00	32.77 AV	54.00	-21.23	1.65 H	223	26.28	6.49
7	7386.00	48.56 PK	74.00	-25.44	1.00 H	216	36.26	12.30
8	7386.00	39.18 AV	54.00	-14.82	1.00 H	216	26.88	12.30

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	113.40 PK			1.00 V	323	110.14	3.26
2	*2462.00	104.72 AV			1.00 V	323	101.46	3.26
3	2483.50	69.30 PK	74.00	-4.70	1.00 V	244	66.01	3.29
4	2483.50	52.97 AV	54.00	-1.03	1.00 V	244	49.68	3.29
5	4924.00	45.16 PK	74.00	-28.84	1.25 V	213	38.67	6.49
6	4924.00	34.18 AV	54.00	-19.82	1.25 V	213	27.69	6.49
7	7386.00	55.66 PK	74.00	-18.34	1.00 V	208	43.36	12.30
8	7386.00	42.51 AV	54.00	-11.49	1.00 V	208	30.21	12.30

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* " : Fundamental frequency.

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie  
Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



802.11n (20MHz)

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.84 PK	74.00	-15.16	1.00 H	215	55.70	3.14
2	2390.00	46.11 AV	54.00	-7.89	1.00 H	215	42.97	3.14
3	*2412.00	106.34 PK			2.21 H	279	103.17	3.17
4	*2412.00	95.95 AV			2.21 H	279	92.78	3.17
5	4824.00	45.92 PK	74.00	-28.08	1.00 H	32	39.45	6.47
6	4824.00	29.69 AV	54.00	-24.31	1.00 H	32	23.22	6.47
7	#7236.00	60.10 PK	76.34	-16.24	1.56 H	203	47.97	12.13
8	#7236.00	47.37 AV	65.95	-18.58	1.56 H	203	35.24	12.13

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	70.73 PK	74.00	-3.27	1.00 V	131	67.59	3.14
2	2390.00	53.48 AV	54.00	-0.52	1.00 V	131	50.34	3.14
3	*2412.00	113.84 PK			1.00 V	156	110.67	3.17
4	*2412.00	105.00 AV			1.00 V	156	101.83	3.17
5	4824.00	40.74 PK	74.00	-33.26	1.26 V	323	34.27	6.47
6	4824.00	30.26 AV	54.00	-23.74	1.26 V	323	23.79	6.47
7	#7236.00	52.84 PK	83.84	-31.00	1.62 V	201	40.71	12.13
8	#7236.00	41.52 AV	75.00	-33.48	1.62 V	201	29.39	12.13

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	53.83 PK	74.00	-20.17	1.65 H	309	15.84	37.99
2	*2437.00	107.86 PK			1.65 H	309	69.77	38.09
3	*2437.00	97.25 AV			2.17 H	136	59.16	38.09
4	2483.50	54.31 PK	74.00	-19.69	2.17 H	136	16.12	38.19
5	2483.50	45.14 AV	54.00	-8.86	2.17 H	136	6.95	38.19
6	4874.00	40.63 PK	74.00	-33.37	1.26 H	263	-0.92	41.55
7	4874.00	29.65 AV	54.00	-24.35	1.26 H	263	-11.90	41.55
8	7311.00	59.38 PK	74.00	-14.62	1.65 H	262	13.78	45.60
9	7311.00	45.41 AV	54.00	-8.59	1.65 H	262	-0.19	45.60

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.19 PK	74.00	-8.81	1.00 V	255	27.20	37.99
2	2390.00	52.48 AV	54.00	-1.52	1.00 V	255	14.49	37.99
3	*2437.00	118.17 PK			1.00 V	231	80.08	38.09
4	*2437.00	109.60 AV			1.00 V	231	71.51	38.09
5	2483.50	66.96 PK	74.00	-7.04	1.00 V	231	28.77	38.19
6	2483.50	52.12 AV	74.00	-1.88	1.00 V	231	13.93	38.19
7	4874.00	43.60 PK	74.00	-30.40	1.62 V	302	2.05	41.55
8	4874.00	34.65 AV	54.00	-19.35	1.62 V	302	-6.90	41.55
9	7311.00	67.98 PK	74.00	-6.02	2.33 V	291	22.38	45.60
10	7311.00	53.40 AV	54.00	-0.60	2.33 V	291	7.80	45.60

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.





CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	100.12 PK			2.15 H	278	61.97	38.15
2	*2462.00	90.39 AV			2.15 H	278	52.24	38.15
3	2483.50	58.45 PK	74.00	-15.55	1.52 H	265	20.26	38.19
4	2483.50	44.71 AV	54.00	-9.29	1.52 H	265	6.52	38.19
5	4924.00	43.65 PK	74.00	-30.35	1.62 H	231	2.08	41.57
6	4924.00	30.21 AV	54.00	-23.79	1.62 H	231	-11.36	41.57
7	7386.00	47.90 PK	74.00	-26.10	1.24 H	146	2.25	45.65
8	7386.00	35.77 AV	54.00	-18.23	1.24 H	146	-9.88	45.65

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	113.04 PK			1.42 V	145	109.78	3.26
2	*2462.00	104.08 AV			1.42 V	145	100.82	3.26
3	2483.50	70.11 PK	74.00	-3.89	1.00 V	135	66.82	3.29
4	2483.50	53.14 AV	54.00	-0.86	1.00 V	135	49.85	3.29
5	4924.00	42.37 PK	74.00	-31.63	1.00 V	162	35.88	6.49
6	4924.00	31.75 AV	54.00	-22.25	1.00 V	162	25.26	6.49
7	7386.00	51.45 PK	74.00	-22.55	1.62 V	219	39.15	12.30
8	7386.00	37.48 AV	54.00	-16.52	1.62 V	219	25.18	12.30

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



802.11n (40MHz)

<b>CHANNEL</b>	TX Channel 3	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.23 PK	74.00	-19.77	1.24 H	139	16.24	37.99
2	2390.00	43.46 AV	54.00	-10.54	1.24 H	139	5.47	37.99
3	*2422.00	96.62 PK			2.14 H	333	58.56	38.06
4	*2422.00	88.01 AV			2.14 H	333	49.95	38.06
5	4844.00	40.01 PK	74.00	-33.99	1.65 H	231	-1.53	41.54
6	4844.00	28.26 AV	54.00	-25.74	1.65 H	231	-13.28	41.54
7	7266.00	49.85 PK	74.00	-24.15	1.49 H	236	4.28	45.57
8	7266.00	38.59 AV	54.00	-15.41	1.49 H	236	-6.98	45.57

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	72.39 PK	74.00	-1.61	1.65 V	61	34.40	37.99
2	2390.00	53.61 AV	54.00	-0.39	1.65 V	61	15.62	37.99
3	*2422.00	107.09 PK			1.00 V	122	69.03	38.06
4	*2422.00	99.20 AV			1.00 V	122	61.14	38.06
5	4844.00	40.25 PK	74.00	-33.75	1.49 V	230	-1.29	41.54
6	4844.00	30.16 AV	54.00	-23.84	1.49 V	230	-11.38	41.54
7	7266.00	50.15 PK	74.00	-23.85	1.33 V	253	4.58	45.57
8	7266.00	46.23 AV	54.00	-7.77	1.33 V	253	0.66	45.57

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	63.43 PK	74.00	-9.57	2.15 H	276	25.44	37.99
2	2390.00	53.02 AV	54.00	-0.98	2.15 H	276	15.03	37.99
3	*2437.00	105.60 PK			2.15 H	276	67.51	38.09
4	*2437.00	95.83 AV			2.15 H	276	57.74	38.09
5	2483.50	61.64 PK	74.00	-12.36	2.15 H	276	23.45	38.19
6	2483.50	51.48 AV	54.00	-2.52	2.15 H	276	13.29	38.19
7	4874.00	43.10 PK	74.00	-30.90	1.09 H	323	1.55	41.55
8	4874.00	29.75 AV	54.00	-24.25	1.09 H	323	-11.80	41.55
9	7311.00	53.33 PK	74.00	-20.67	1.46 H	229	7.73	45.60
10	7311.00	42.60 AV	54.00	-11.40	1.46 H	229	-3.00	45.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	73.60 PK	74.00	-0.40	1.25 V	236	35.61	37.99
2	2390.00	52.90 AV	54.00	-1.10	1.25 V	236	14.91	37.99
3	*2437.00	117.37 PK			1.00 V	160	79.28	38.09
4	*2437.00	108.16 AV			1.00 V	160	70.07	38.09
5	2483.50	72.58 PK	74.00	-1.42	1.00 V	160	34.39	38.19
6	2483.50	52.55 AV	74.00	-1.45	1.00 V	160	14.36	38.19
7	4874.00	42.35 PK	74.00	-31.65	1.26 V	201	0.80	41.55
8	4874.00	31.26 AV	54.00	-22.74	1.26 V	201	-10.29	41.55
9	7311.00	65.91 PK	74.00	-8.09	2.27 V	292	20.31	45.60
10	7311.00	53.13 AV	54.00	-0.87	2.27 V	292	7.53	45.60

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	96.12 PK			1.84 H	294	58.00	38.12
2	*2452.00	86.34 AV			1.84 H	294	48.22	38.12
3	2483.50	53.57 PK	74.00	-20.43	1.64 H	285	15.38	38.19
4	2483.50	43.97 AV	54.00	-10.03	1.64 H	285	5.78	38.19
5	4904.00	42.15 PK	74.00	-31.85	1.49 H	231	0.59	41.56
6	4904.00	30.25 AV	54.00	-23.75	1.49 H	231	-11.31	41.56
7	7356.00	45.21 PK	74.00	-28.79	1.49 H	78	-0.42	45.63
8	7356.00	31.02 AV	54.00	-22.98	1.49 H	78	-14.61	45.63

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	108.69 PK			1.49 V	230	70.57	38.12
2	*2452.00	98.53 AV			1.49 V	230	60.41	38.12
3	2483.50	66.79 PK	74.00	-7.21	1.00 V	155	28.60	38.19
4	2483.50	53.65 AV	54.00	-0.35	1.00 V	155	15.46	38.19
5	4904.00	40.15 PK	74.00	-33.85	1.24 V	302	-1.41	41.56
6	4904.00	30.62 AV	54.00	-23.38	1.24 V	302	-10.94	41.56
7	7356.00	45.62 PK	74.00	-28.38	1.46 V	100	-0.01	45.63
8	7356.00	32.13 AV	54.00	-21.87	1.46 V	100	-13.50	45.63

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* " : Fundamental frequency.



## Addition channel test for radiation emission bandedge.

### ABOVE 1GHz DATA

#### 802.11b

<b>CHANNEL</b>	TX Channel 2	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	52.69 PK	74.00	-21.31	1.44 H	174	14.70	37.99
2	2390.00	43.42 AV	54.00	-10.58	1.44 H	174	5.43	37.99
3	*2417.00	98.04 PK			1.44 H	174	59.99	38.05
4	*2417.00	95.13 AV			1.44 H	174	57.08	38.05

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.84 PK	74.00	-15.16	1.00 V	181	20.85	37.99
2	2390.00	53.14 AV	54.00	-0.86	1.00 V	181	15.15	37.99
3	*2417.00	111.34 PK			1.00 V	181	73.29	38.05
4	*2417.00	108.45 AV			1.00 V	181	70.40	38.05

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



<b>CHANNEL</b>	TX Channel 10	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2457.00	98.64 PK			2.50 H	140	60.51	38.13
2	*2457.00	95.80 AV			2.50 H	140	57.67	38.13
3	2483.50	53.03 PK	74.00	-20.97	2.50 H	140	14.84	38.19
4	2483.50	43.57 AV	54.00	-10.43	2.50 H	140	5.38	38.19

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2457.00	109.97 PK			1.00 V	238	71.84	38.13
2	*2457.00	106.99 AV			1.00 V	238	68.86	38.13
3	2483.50	60.76 PK	74.00	-13.24	1.00 V	238	22.57	38.19
4	2483.50	53.73 AV	54.00	-0.27	1.00 V	238	15.54	38.19

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



802.11g

<b>CHANNEL</b>	TX Channel 2	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	52.84 PK	74.00	-21.16	2.01 H	131	14.85	37.99
2	2390.00	43.30 AV	54.00	-10.70	2.01 H	131	5.31	37.99
3	*2417.00	101.03 PK			2.01 H	131	62.98	38.05
4	*2417.00	93.16 AV			2.01 H	131	55.11	38.05

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.02 PK	74.00	-6.98	1.00 V	194	29.03	37.99
2	2390.00	53.36 AV	54.00	-0.64	1.00 V	194	15.37	37.99
3	*2417.00	110.78 PK			1.00 V	194	72.73	38.05
4	*2417.00	102.01 AV			1.00 V	194	63.96	38.05

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



CHANNEL	TX Channel 10	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2457.00	102.82 PK			2.79 H	137	64.69	38.13
2	*2457.00	93.10 AV			2.79 H	137	54.97	38.13
3	2483.50	52.90 PK	74.00	-21.10	2.79 H	137	14.71	38.19
4	2483.50	43.53 AV	54.00	-10.47	2.79 H	137	5.34	38.19

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2457.00	113.81 PK			1.00 V	177	75.68	38.13
2	*2457.00	104.25 AV			1.00 V	177	66.12	38.13
3	2483.50	69.64 PK	74.00	-4.36	1.00 V	177	31.45	38.19
4	2483.50	53.68 AV	54.00	-0.32	1.00 V	177	15.49	38.19

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.





802.11n (HT20)

<b>CHANNEL</b>	TX Channel 2	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.80 PK	74.00	-19.20	2.03 H	130	16.81	37.99
2	2390.00	44.38 AV	54.00	-9.62	2.03 H	130	6.39	37.99
3	*2417.00	102.57 PK			2.03 H	130	64.52	38.05
4	*2417.00	92.88 AV			2.03 H	130	54.83	38.05
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.16 PK	74.00	-5.84	1.00 V	194	30.17	37.99
2	2390.00	53.55 AV	54.00	-0.45	1.00 V	194	15.56	37.99
3	*2417.00	111.06 PK			1.00 V	194	73.01	38.05
4	*2417.00	101.76 AV			1.00 V	194	63.71	38.05

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



<b>CHANNEL</b>	TX Channel 10	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2457.00	98.40 PK			1.00 H	178	60.27	38.13
2	*2457.00	90.12 AV			1.00 H	178	51.99	38.13
3	2483.50	55.87 PK	74.00	-18.13	1.00 H	178	17.68	38.19
4	2483.50	45.32 AV	54.00	-8.68	1.00 H	178	7.13	38.19

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2457.00	112.40 PK			1.00 V	241	74.27	38.13
2	*2457.00	101.73 AV			1.00 V	241	63.60	38.13
3	2483.50	68.19 PK	74.00	-5.81	1.00 V	241	30.00	38.19
4	2483.50	53.39 AV	54.00	-0.61	1.00 V	241	15.20	38.19

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



802.11n (HT40)

<b>CHANNEL</b>	TX Channel 4	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.93 PK	74.00	-19.07	2.68 H	153	16.94	37.99
2	2390.00	43.44 AV	54.00	-10.56	2.68 H	153	5.45	37.99
3	*2427.00	93.94 PK			2.68 H	153	55.87	38.07
4	*2427.00	83.95 AV			2.68 H	153	45.88	38.07
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.86 PK	74.00	-7.14	1.00 V	194	28.87	37.99
2	2390.00	52.79 AV	54.00	-1.21	1.00 V	194	14.80	37.99
3	*2427.00	106.80 PK			1.00 V	194	68.73	38.07
4	*2427.00	97.13 AV			1.00 V	194	59.06	38.07

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



CHANNEL	TX Channel 8	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2447.00	96.03 PK			1.00 H	344	57.92	38.11
2	*2447.00	86.26 AV			1.00 H	344	48.15	38.11
3	2483.50	55.02 PK	74.00	-18.98	1.00 H	344	16.83	38.19
4	2483.50	44.21 AV	54.00	-9.79	1.00 H	344	6.02	38.19

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2447.00	105.28 PK			1.00 V	239	67.17	38.11
2	*2447.00	95.65 AV			1.00 V	239	57.54	38.11
3	2483.50	67.13 PK	74.00	-6.87	1.00 V	239	28.94	38.19
4	2483.50	52.99 AV	54.00	-1.01	1.00 V	239	14.80	38.19

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



### 4.3 6dB BANDWIDTH MEASUREMENT

#### 4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Sensor	Keysight	U2021XA	MY55060016	May 04,16	May 03,17
Power Sensor	Keysight	U2021XA	MY55060018	May 04,16	May 03,17
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 13, 16	Oct.12, 17
Humid & Temp Programmable Tester	Haida	HD-2257	110807201	Sep.05,16	Sep. 04,17
Oscilloscope	Agilent	DSO9254A	MY51260160	Nov. 04,16	Nov. 03,17
Signal Analyzer	Rohde & Schwarz	FSV7	102331	Nov. 04,16	Nov. 03,17
Signal Generator	Agilent	N5183A	MY50140980	Nov. 04,16	Nov. 03,17
Agile Signal Generator	Agilent	8645A	Agilent	Aug.08, 16	Aug.07, 17
ESG Vector Signal Generator	Agilent	E4438C	MY49072505	Apr. 22, 16	Apr. 21, 17
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	Aug.08, 16	Aug.07, 17

**NOTE:**

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

#### 4.3.3 TEST PROCEDURE


1. Set resolution bandwidth (RBW) = 100KHz
2. Set the video bandwidth (VBW) ≥ 3 x RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation.



#### 4.3.5 TEST SETUP

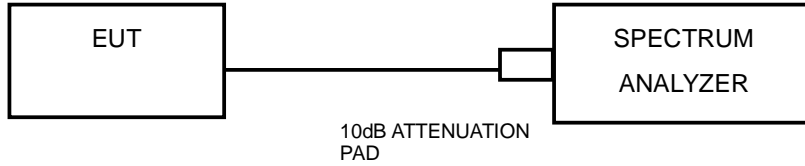

#### 4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



### 4.3.7 TEST RESULTS

#### 802.11b

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	9.55	9.10	0.5	PASS
6	2437	9.59	9.56	0.5	PASS
11	2462	10.04	9.58	0.5	PASS

#### 802.11g

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	16.35	16.35	0.5	PASS
6	2437	16.37	16.35	0.5	PASS
11	2462	15.94	16.32	0.5	PASS



802.11n 20MHz

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	17.61	16.56	0.5	PASS
6	2437	17.56	17.59	0.5	PASS
11	2462	16.54	17.19	0.5	PASS

802.11n 40MHz

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
3	2422	34.43	34.33	0.5	PASS
6	2437	33.90	34.49	0.5	PASS
9	2452	35.13	34.49	0.5	PASS






BUREAU VERITAS

Test Report No.: RF161208N040

CHAIN 0

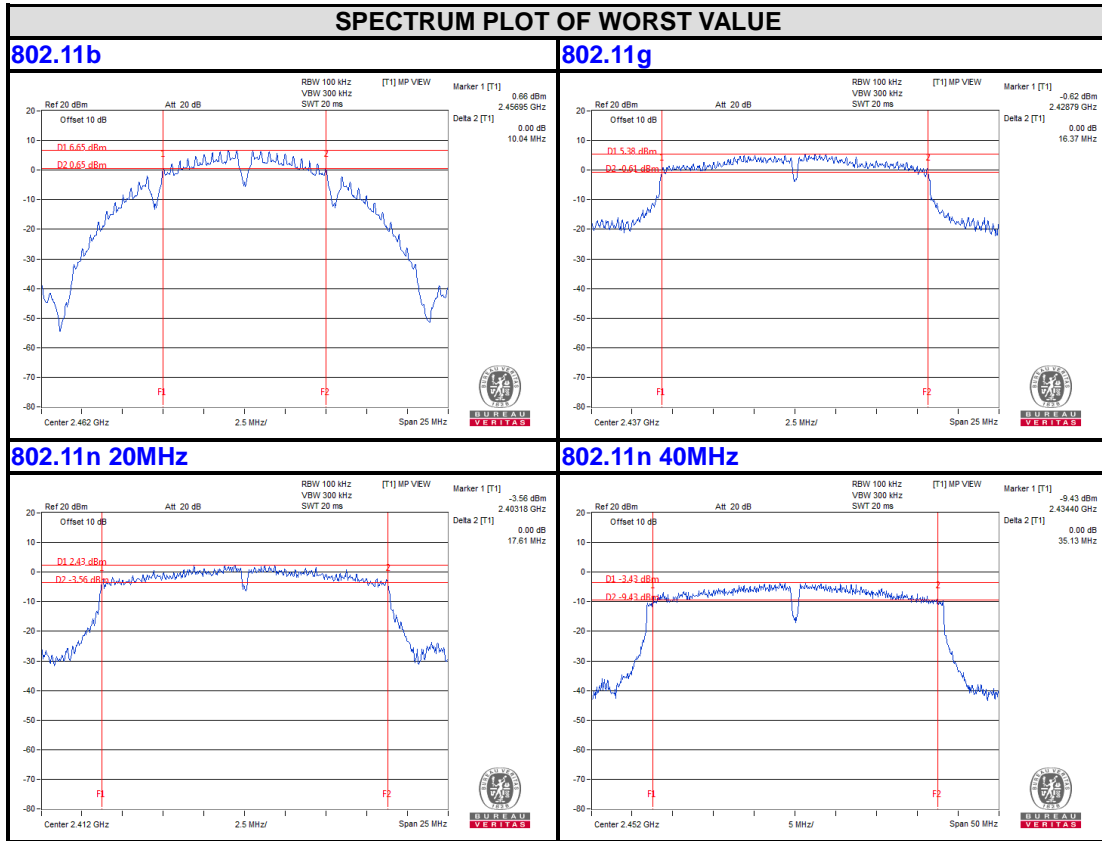

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie  
Town, Dongguan City,  
Guangdong 523942, China


Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



BUREAU  
VERITAS

Test Report No.: RF161208N040

CHAIN 1

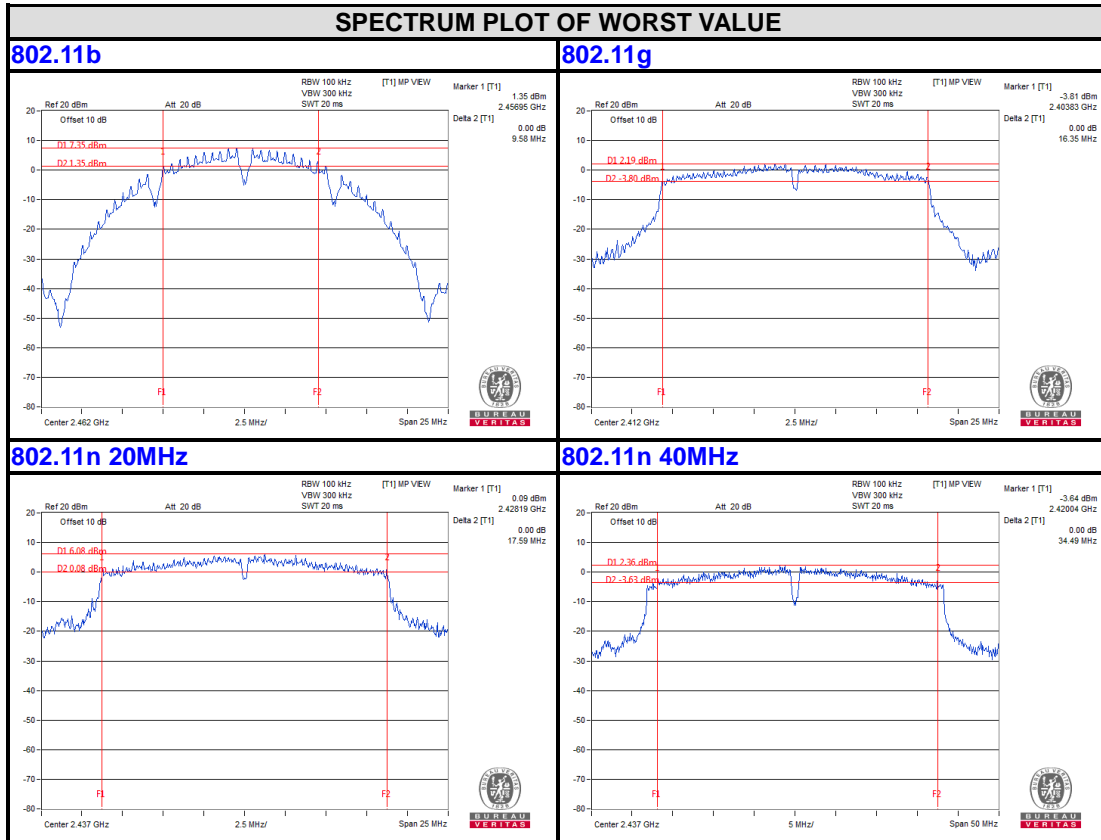

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie  
Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)




### 4.4 CONDUCTED OUTPUT POWER

#### 4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm).

#### 4.4.2 TEST SETUP

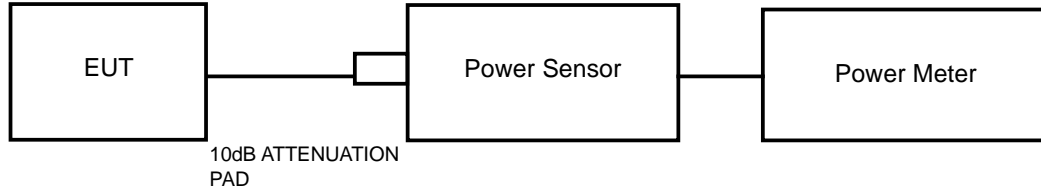

#### 4.4.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Sensor	Keysight	U2021XA	MY55060016	May 04,16	May 03,17
Power Sensor	Keysight	U2021XA	MY55060018	May 04,16	May 03,17
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 13, 16	Oct.12, 17
Humid & Temp Programmable Tester	Haida	HD-2257	110807201	Sep.05,16	Sep. 04,17
Oscilloscope	Agilent	DSO9254A	MY51260160	Nov. 04,16	Nov. 03,17
Signal Analyzer	Rohde & Schwarz	FSV7	102331	Nov. 04,16	Nov. 03,17
Signal Generator	Agilent	N5183A	MY50140980	Nov. 04,16	Nov. 03,17
Agile Signal Generator	Agilent	8645A	Agilent	Aug.08, 16	Aug.07, 17
ESG Vector Signal Generator	Agilent	E4438C	MY49072505	Apr. 22, 16	Apr. 21, 17
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	Aug.08, 16	Aug.07, 17

**NOTE:**

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



#### 4.4.4 TEST PROCEDURES

An Average power sensor was used on the output port of the EUT. An Average power meter was used to read the response of the Average power sensor. Record the Average power level.

#### 4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



#### 4.4.7 TEST RESULTS

##### 802.11b

CHAN.	FREQ (MHz)	AVG. POWER (dBm)		AVG. POWER (mW)		TOTAL POWER (mW)	TOTAL POWER (dBm)	AVG. POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1				
1	2412	17.42	17.49	55.208	56.105	111.313	20.47	30	PASS
6	2437	18.41	18.47	69.343	70.307	<b>139.650</b>	<b>21.45</b>	30	PASS
11	2462	16.32	16.43	42.855	43.954	86.809	19.39	30	PASS

##### 802.11g

CHAN.	FREQ (MHz)	AVG. POWER (dBm)		AVG. POWER (mW)		TOTAL POWER (mW)	TOTAL POWER (dBm)	AVG. POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1				
1	2412	14.74	14.65	29.785	29.174	58.959	17.71	30	PASS
6	2437	17.91	17.93	61.802	62.087	123.889	20.93	30	PASS
11	2462	14.23	14.32	26.485	27.04	53.525	17.29	30	PASS



802.11n 20MHz

CHAN.	FREQ (MHz)	AVG. POWER (dBm)		AVG. POWER (mW)		TOTAL POWER (mW)	TOTAL POWER (dBm)	AVG. POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1				
1	2412	15.21	15.44	33.189	34.995	68.184	18.34	30	PASS
6	2437	18.01	17.98	63.241	62.806	126.047	21.01	30	PASS
11	2462	14.21	14.37	26.363	27.353	53.716	17.30	30	PASS

802.11n 40MHz

CHAN.	FREQ (MHz)	AVG. POWER (dBm)		AVG. POWER (mW)		TOTAL POWER (mW)	TOTAL POWER (dBm)	AVG. POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1				
3	2422	11.46	11.72	13.996	14.859	28.855	14.60	30	PASS
6	2437	16.62	16.84	45.92	48.306	94.226	19.74	30	PASS
9	2452	11.14	11.32	13.002	13.552	26.554	14.24	30	PASS




## 4.5 POWER SPECTRAL DENSITY MEASUREMENT

### 4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

### 4.5.2 TEST SETUP



### 4.5.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

### 4.5.4 TEST PROCEDURE

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to: 3 kHz.
- d) Set VBW  $\geq 3 \times$  RBW.
- e) Detector = peak
- f) Ensure that the number of measurement points in the sweep  $\geq 2 \times$  span/RBW.
- g) Sweep time = auto couple.
- h) Use the peak marker function to determine the maximum amplitude level.

### 4.5.5 DEVIATION FROM TEST STANDARD

No deviation.



#### 4.5.6 EUT OPERATING CONDITION

Same as item 4.3.6.

#### 4.5.7 TEST RESULTS

##### 802.11b

TX chain	Channel	Freq. (MHz)	PSD (dBm/3KHz)	10 log (N=2) dB	TOTAL PSD (dBm/3KHz)	Limit (dBm/3KHz)	PASS /FAIL
0	1	2412	-6.25	3.01	-3.24	6.67	PASS
	6	2437	-4.40	3.01	-1.39	6.67	PASS
	11	2462	-6.80	3.01	-3.79	6.67	PASS
1	1	2412	-4.74	3.01	-1.73	6.67	PASS
	6	2437	-5.32	3.01	-2.31	6.67	PASS
	11	2462	-6.12	3.01	-3.11	6.67	PASS

**NOTE:**

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain =  $4.32\text{dBi} + 10\log(2) = 7.33$ , so the limit about power density need to reduce 1.33dB.

##### 802.11g

TX chain	Channel	Freq. (MHz)	PSD (dBm/3KHz)	10 log (N=2) dB	TOTAL PSD (dBm/3KHz)	Limit (dBm/3KHz)	PASS /FAIL
0	1	2412	-9.72	3.01	-6.71	6.67	PASS
	6	2437	-6.61	3.01	-3.60	6.67	PASS
	11	2462	-10.49	3.01	-7.48	6.67	PASS
1	1	2412	-10.20	3.01	-7.19	6.67	PASS
	6	2437	-5.70	3.01	-2.69	6.67	PASS
	11	2462	-10.04	3.01	-7.03	6.67	PASS

**NOTE:**

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain =  $4.32\text{dBi} + 10\log(2) = 7.33$ , so the limit about power density need to reduce 1.33dB.





802.11n 20MHz

TX chain	Channel	Freq. (MHz)	PSD (dBm/3KHz)	10 log (N=2) dB	TOTAL PSD (dBm/3KHz)	Limit (dBm/3KHz)	PASS /FAIL
0	1	2412	-10.01	3.01	-7.00	6.67	PASS
	6	2437	-6.93	3.01	-3.92	6.67	PASS
	11	2462	-10.03	3.01	-7.02	6.67	PASS
1	1	2412	-10.04	3.01	-7.03	6.67	PASS
	6	2437	-6.39	3.01	-3.38	6.67	PASS
	11	2462	-10.13	3.01	-7.12	6.67	PASS

NOTE:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain =  $4.32\text{dBi} + 10\log(2) = 7.33$ , so the limit about power density need to reduce 1.33dB.

802.11n 40MHz

TX chain	Channel	Freq. (MHz)	PSD (dBm/3KHz)	10 log (N=2) dB	TOTAL PSD (dBm/3KHz)	Limit (dBm/3KHz)	PASS /FAIL
0	3	2422	-14.27	3.01	-11.26	6.67	PASS
	6	2437	-10.58	3.01	-7.57	6.67	PASS
	9	2452	-15.46	3.01	-12.45	6.67	PASS
1	3	2422	-14.70	3.01	-11.69	6.67	PASS
	6	2437	-9.81	3.01	-6.80	6.67	PASS
	9	2452	-15.50	3.01	-12.49	6.67	PASS

NOTE:


1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain =  $4.32\text{dBi} + 10\log(2) = 7.33$ , so the limit about power density need to reduce 1.33dB.



**BUREAU  
VERITAS**

Test Report No.: RF161208N040

**CHAIN 0**

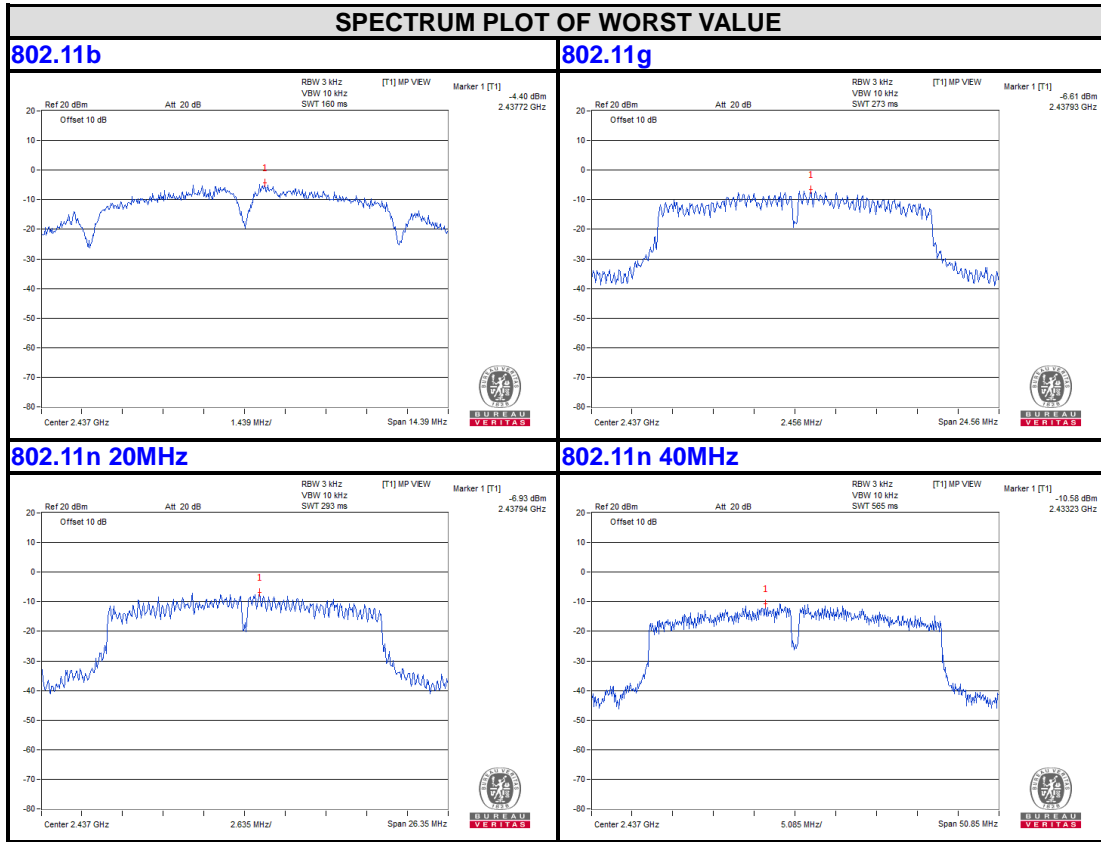

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie  
Town, Dongguan City,  
Guangdong 523942, China


Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



**BUREAU  
VERITAS**

Test Report No.: RF161208N040

**CHAIN 1**

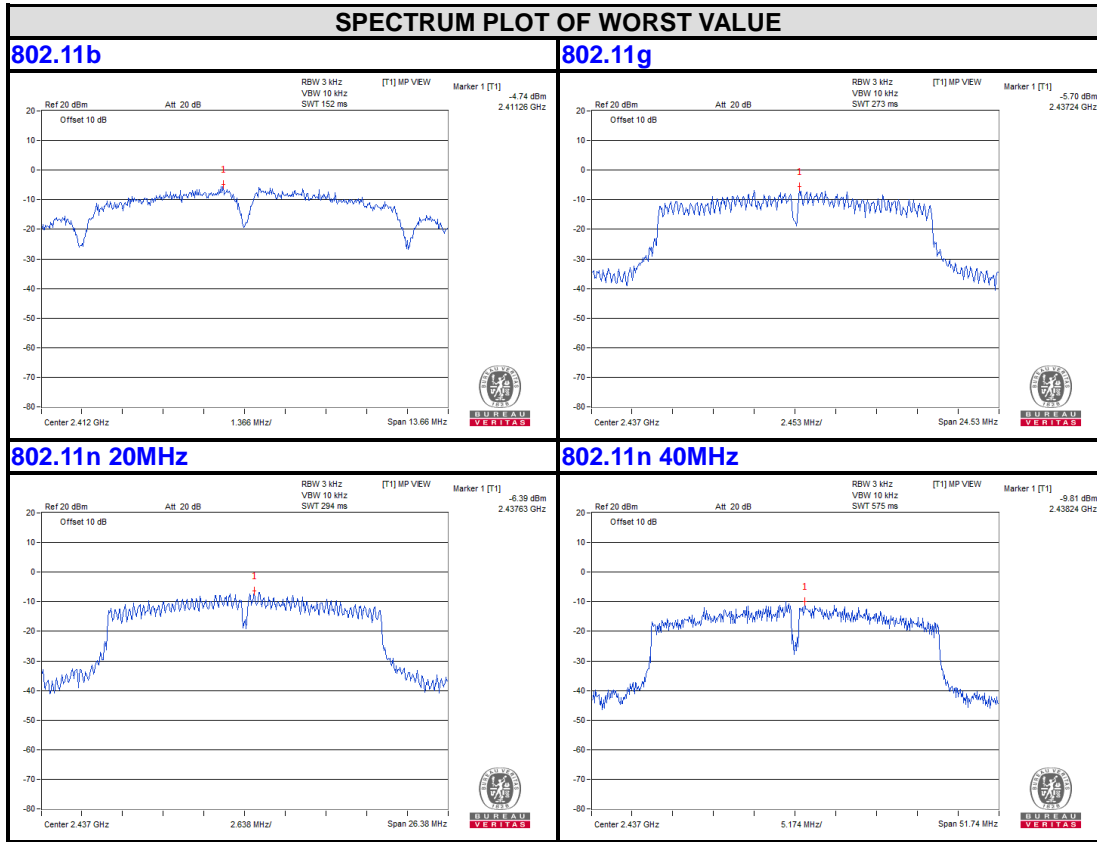




## 4.6 OUT OF BAND EMISSION MEASUREMENT

### 4.6.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below  $-30\text{dB}$  of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.6.2 TEST SETUP

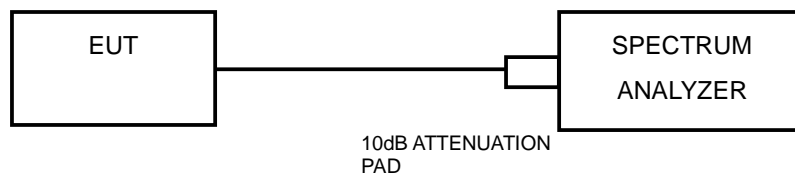

### 4.6.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

### 4.6.4 TEST PROCEDURE

#### Measurement Procedure - Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



### Measurement Procedure –Unwanted Emission Level

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

#### 4.6.5 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.6.6 EUT OPERATING CONDITION


Same as item 4.3.6



### 4.6.7 TEST RESULTS


802.11b

CHAIN 0

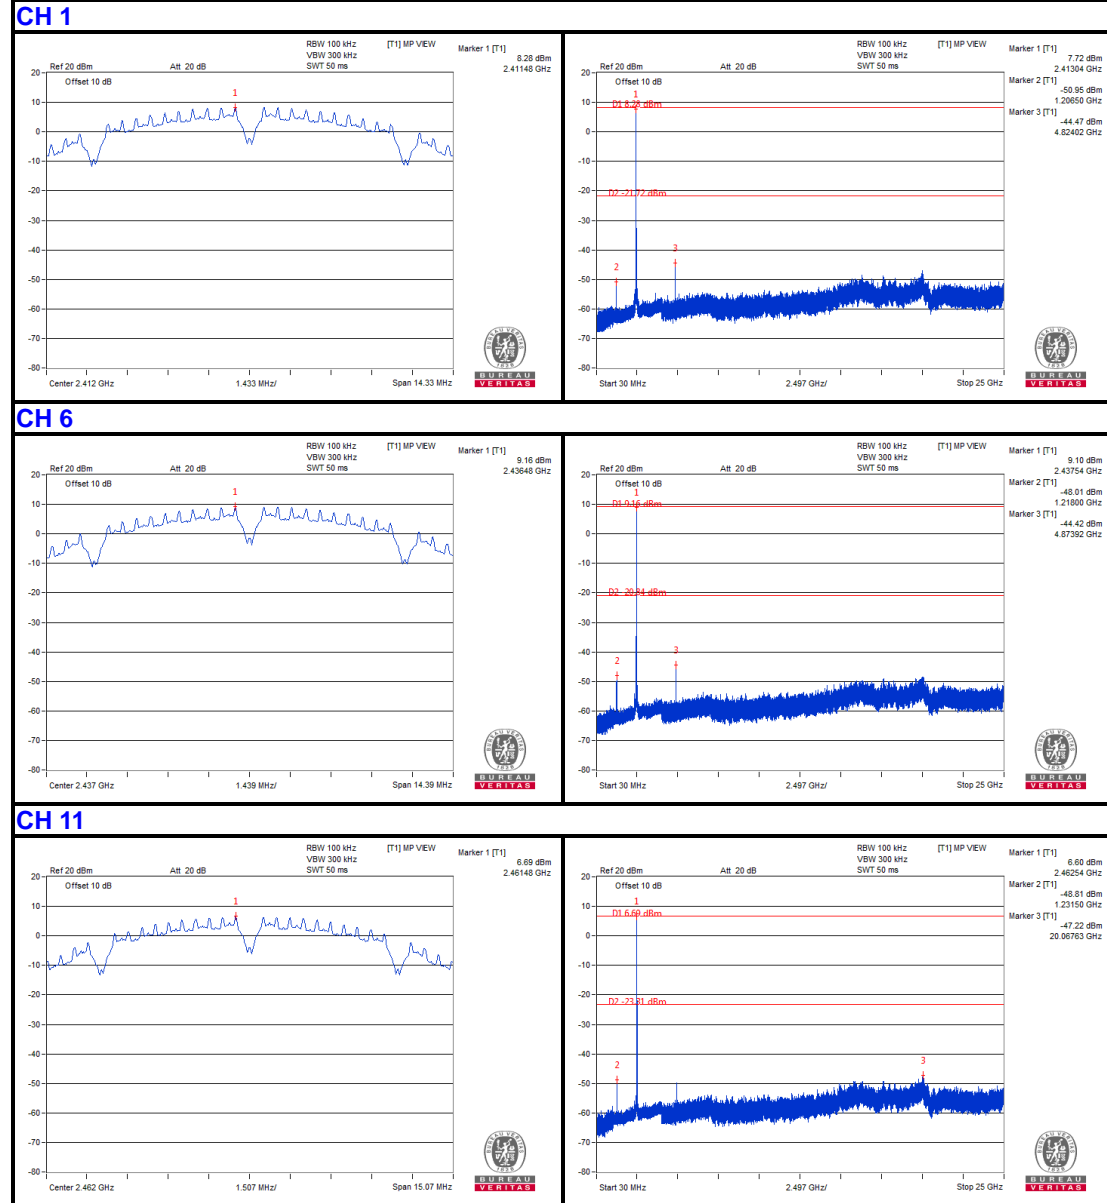





**CHAIN 1**

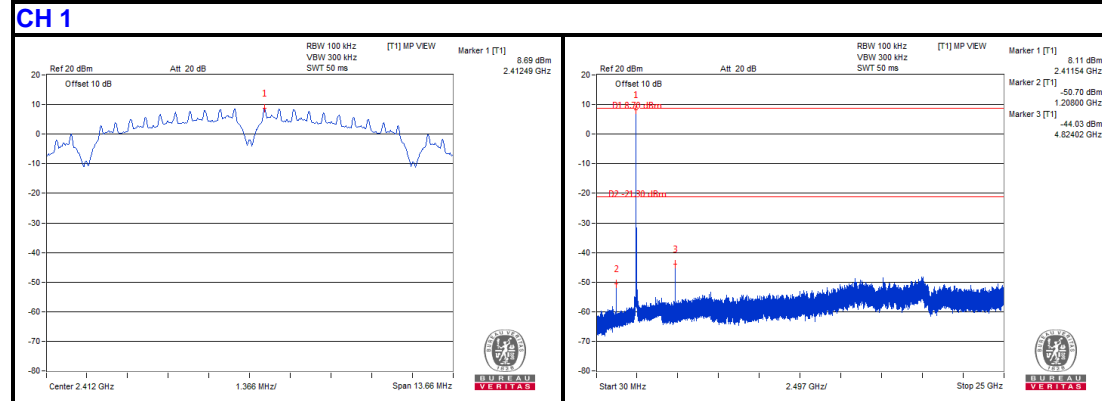

**CH 6**

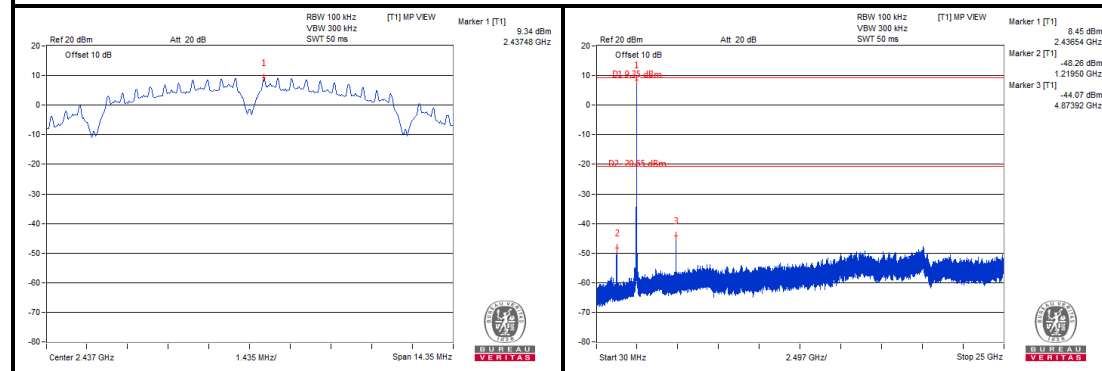

**CH 11**

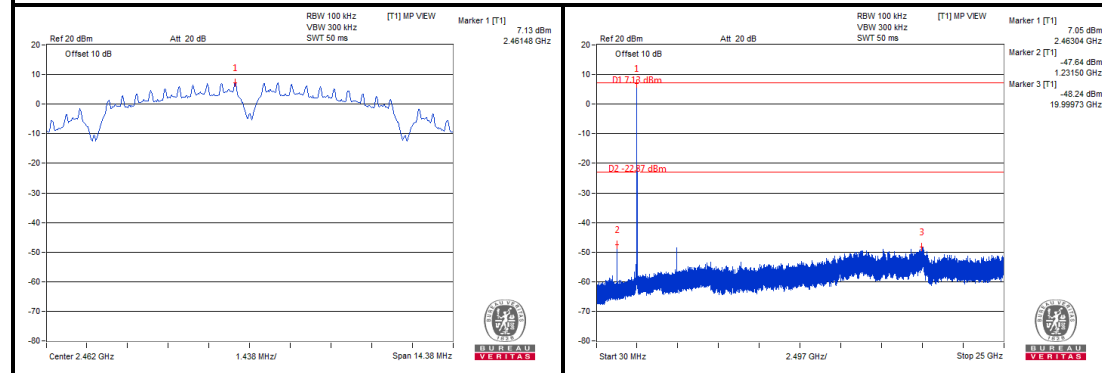





802.11g

CHAIN 0


CH 1

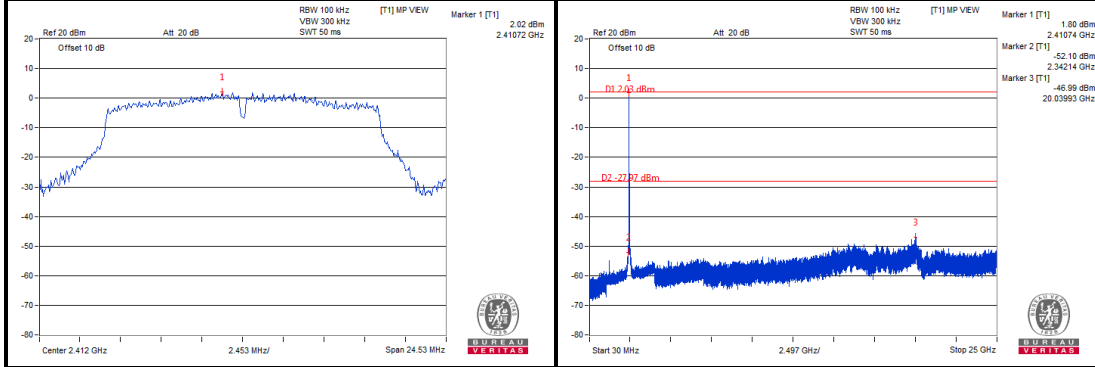

CH 6

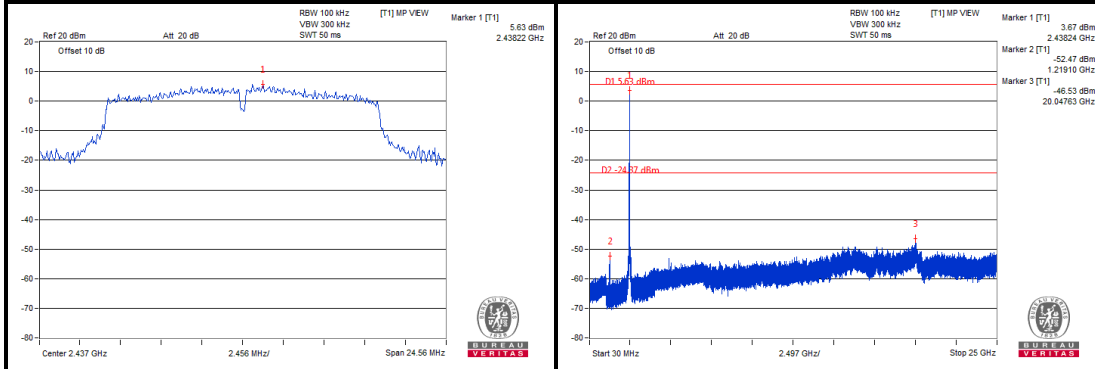

CH 11

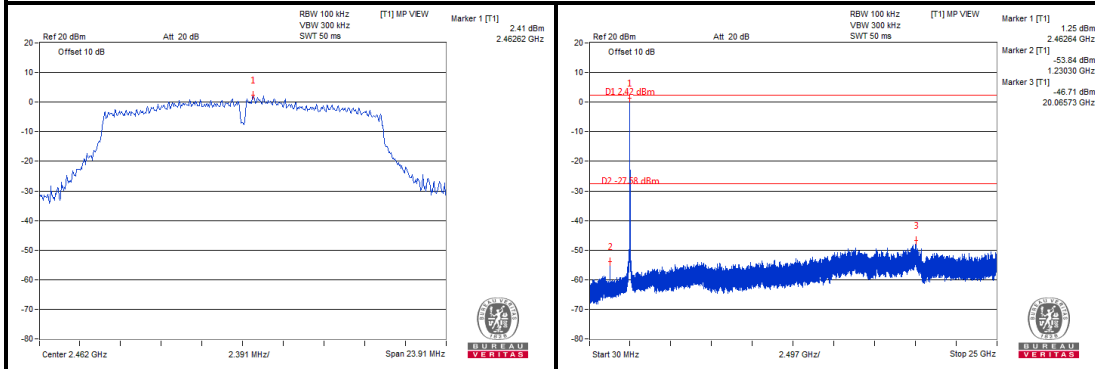







BUREAU VERITAS

Test Report No.: RF161208N040


CHAIN 1

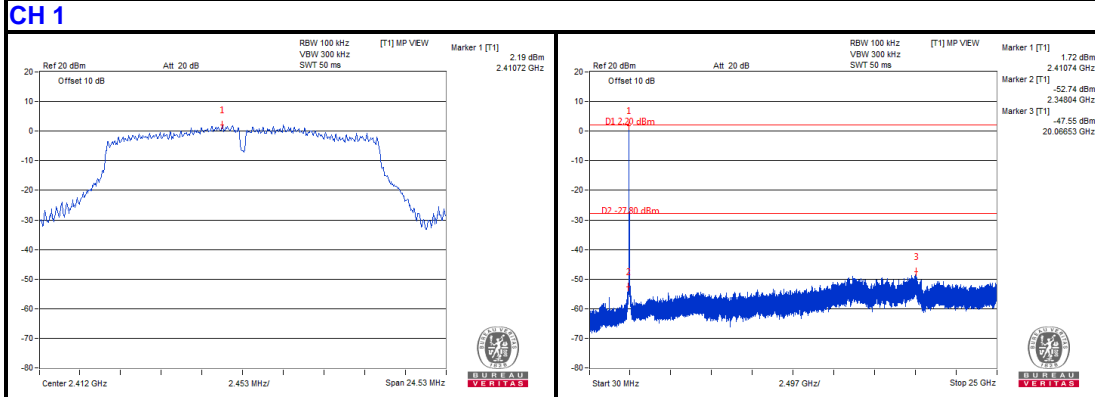

CH 6

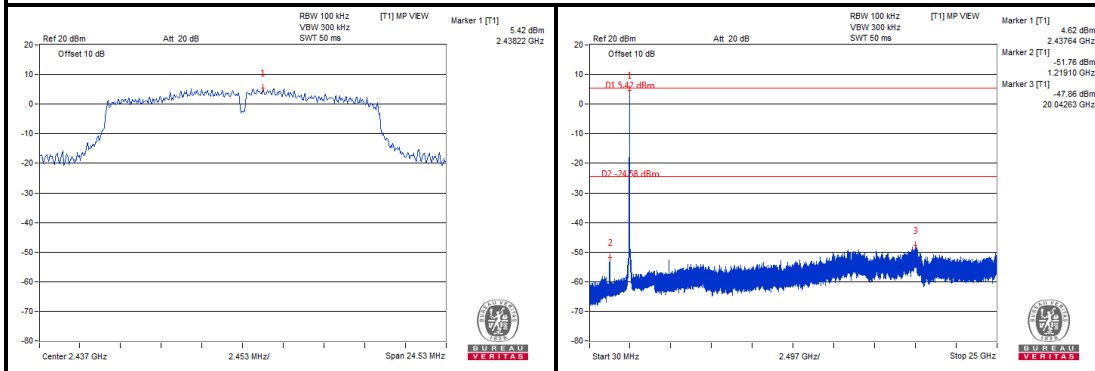

CH 11

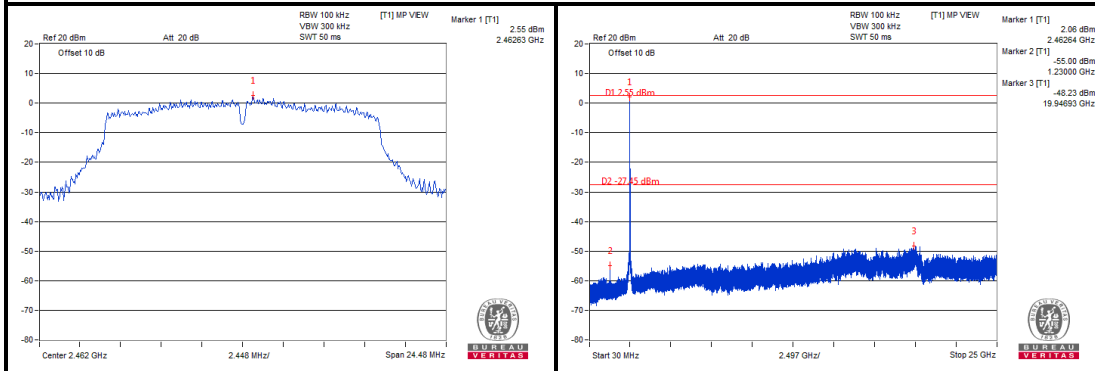

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch


No. 34, Chenwulu Section, Guantai Rd., Houjie  
Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)




**802.11n 20MHz**

**CHAIN 0**

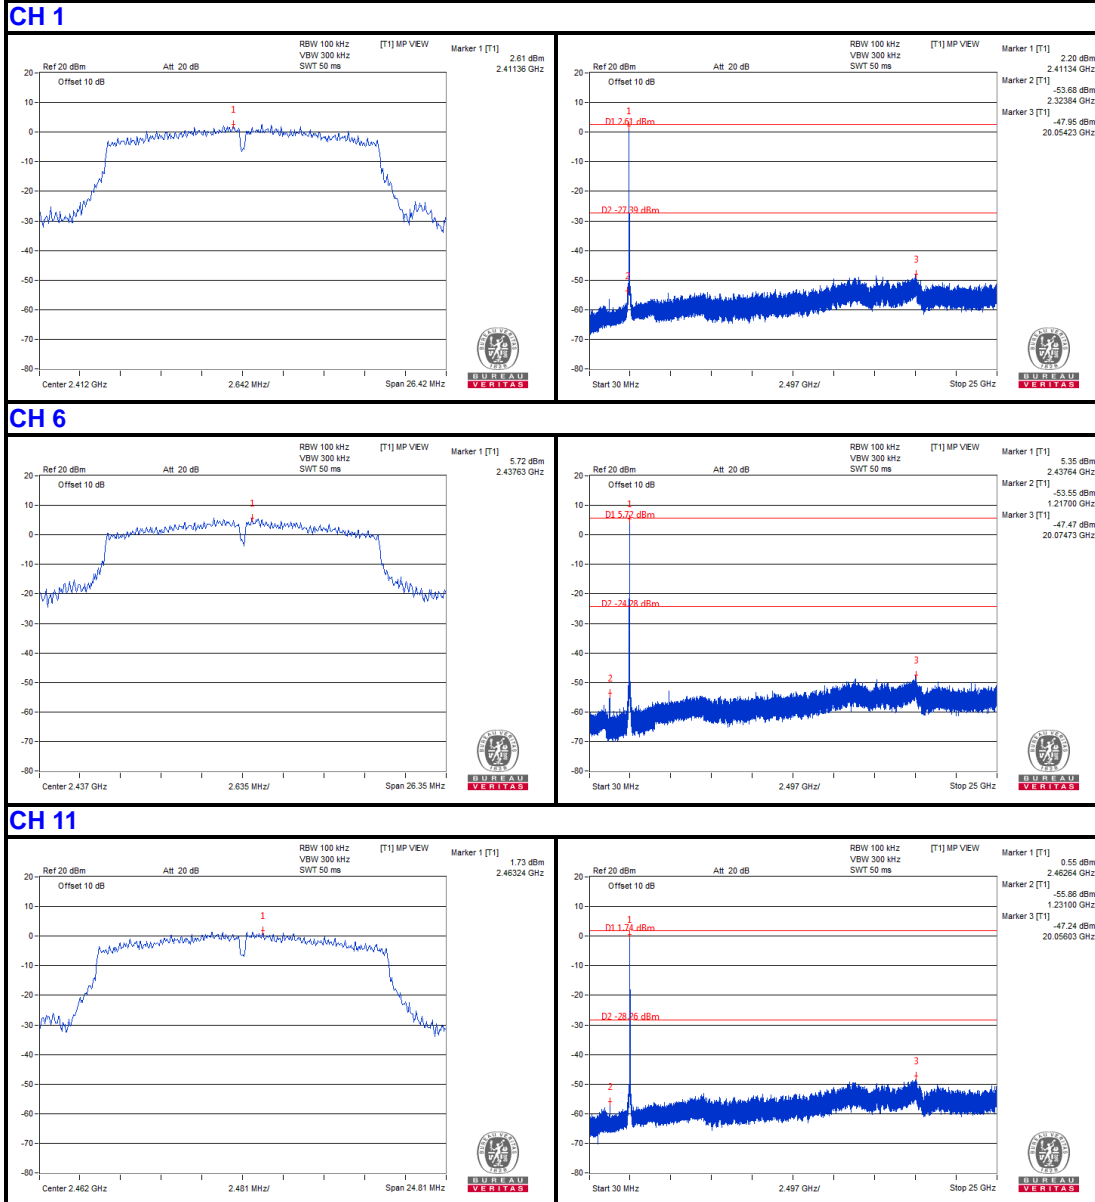





CHAIN 1

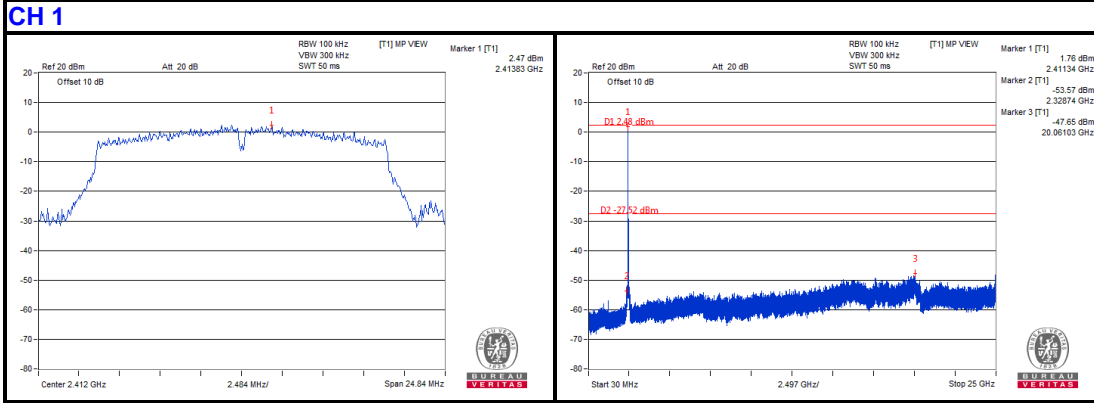

CH 6

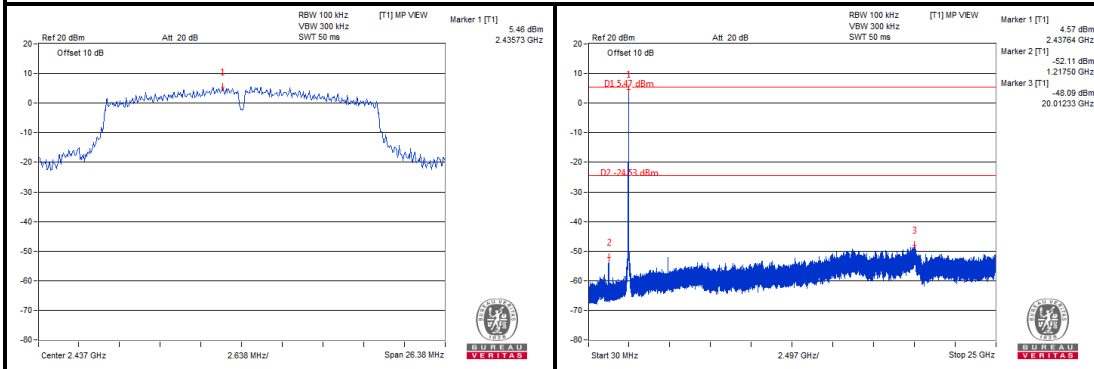

CH 11

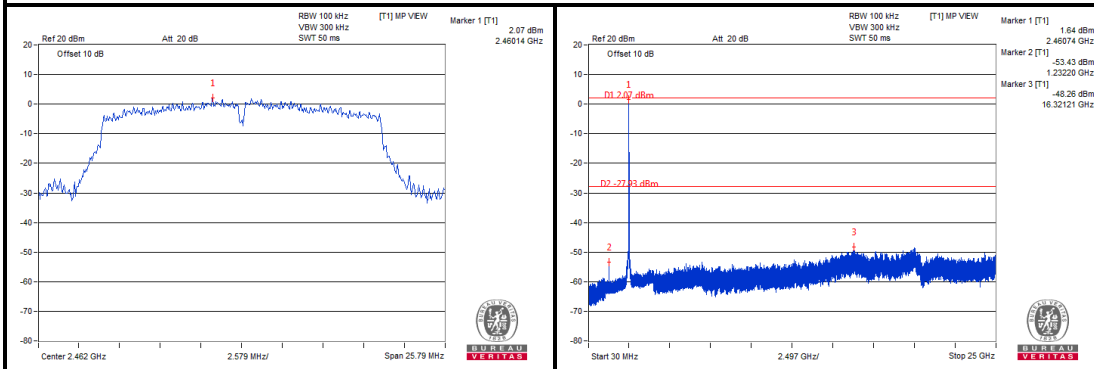





**802.11n 40MHz**

**CHAIN 0**


**CH 3**

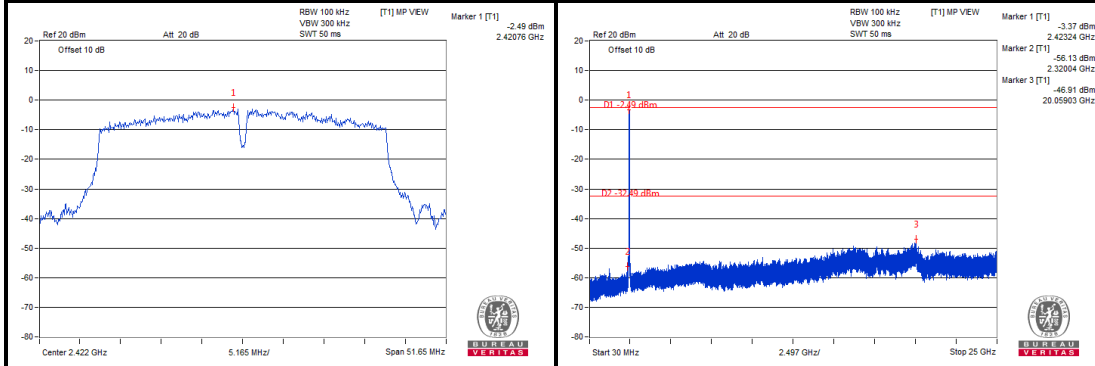

**CH 6**

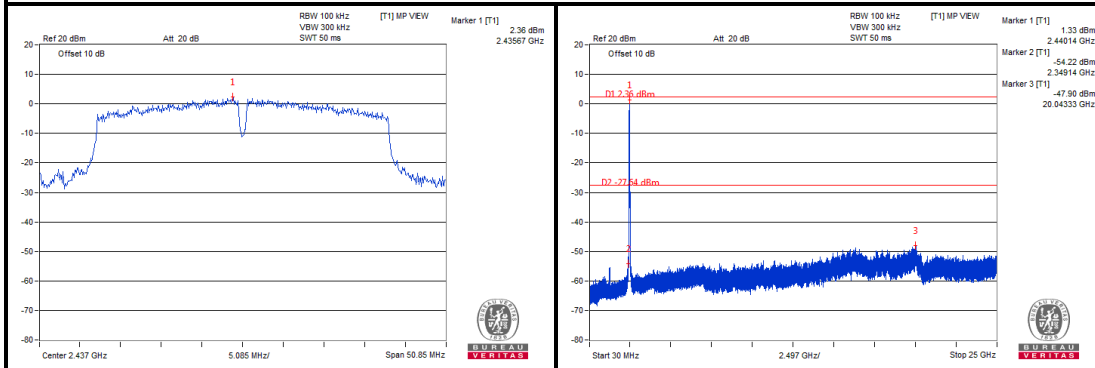


**CH 9**

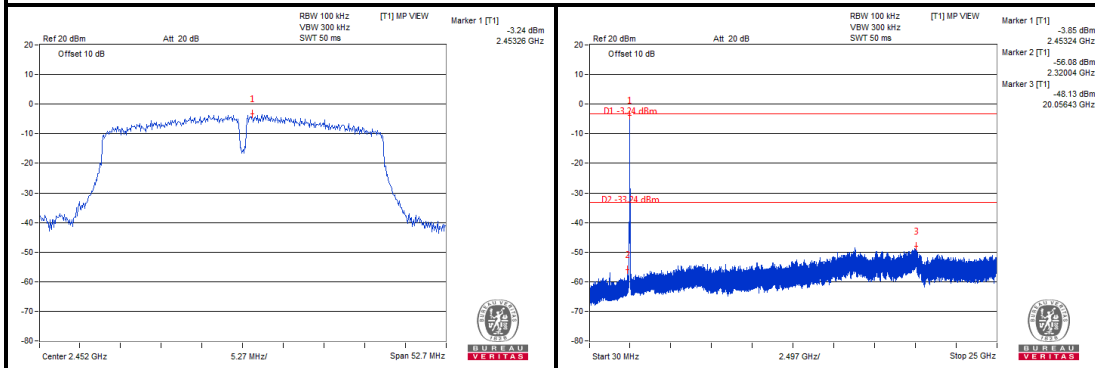




**CHAIN 1**


**CH 3**

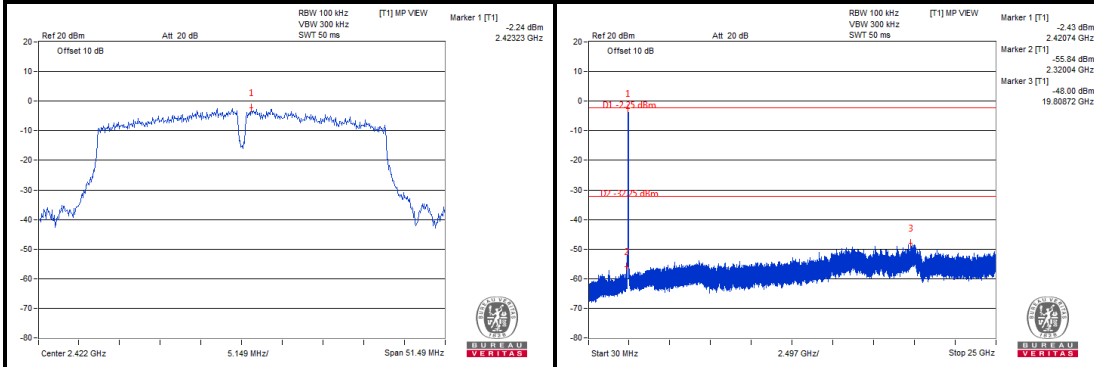

**CH 6**

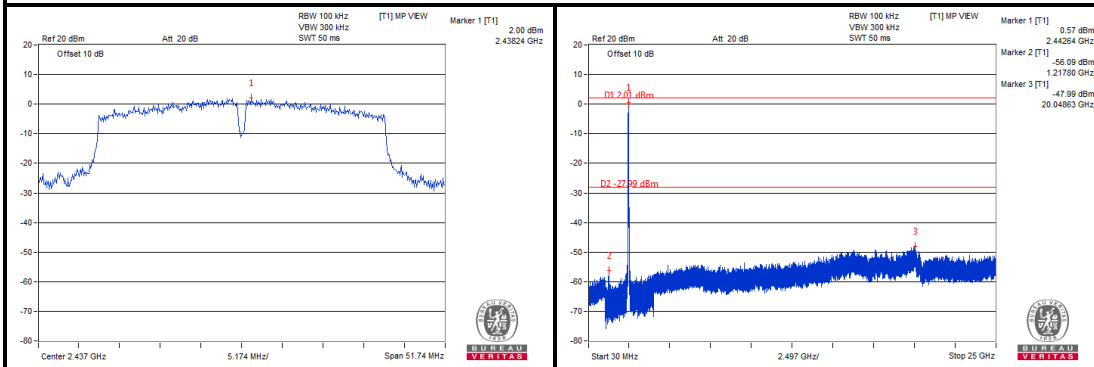


**CH 9**

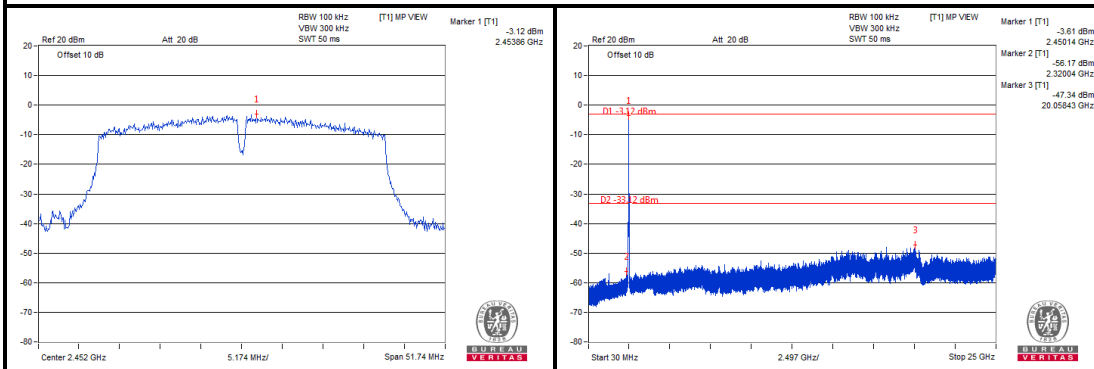




802.11b

CHAIN 0

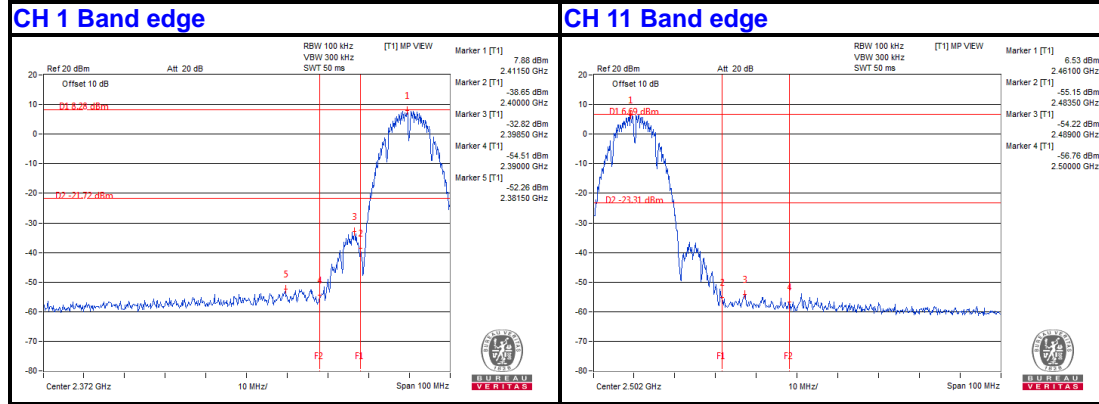

CHAIN 1

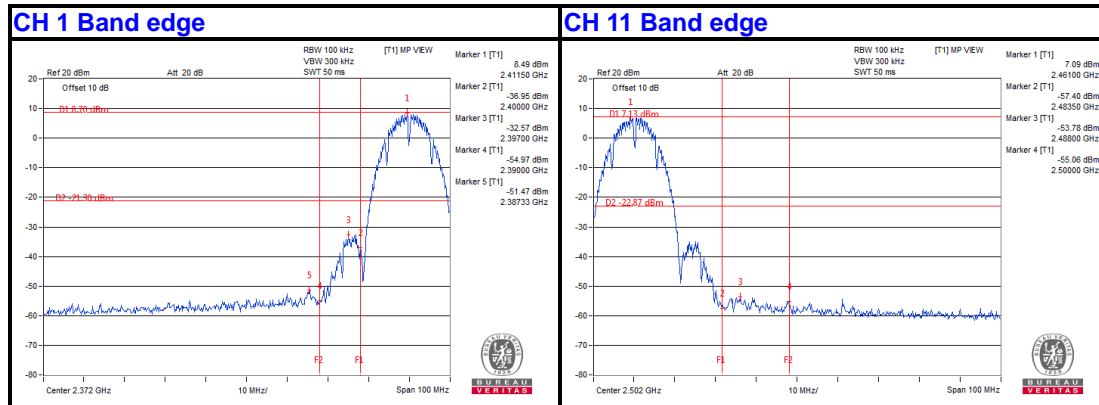




BUREAU VERITAS

Test Report No.: RF161208N040


802.11g

CHAIN 0

CH 1 Band edge

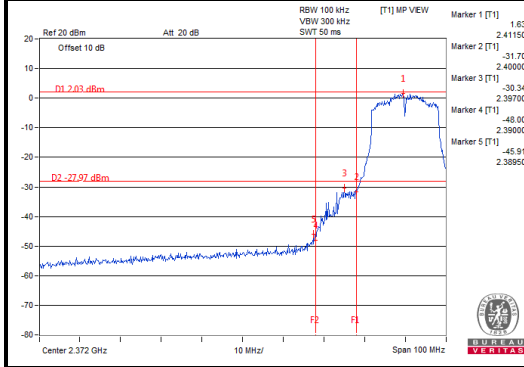


CH 11 Band edge

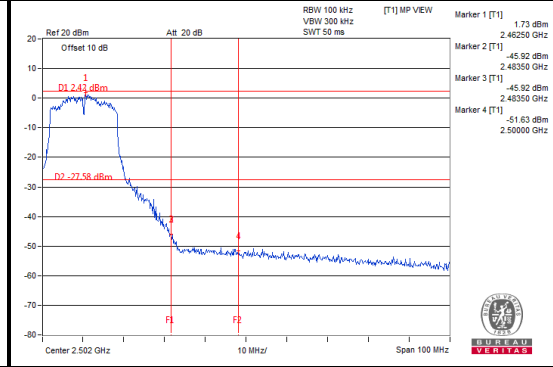


CHAIN 1

CH 1 Band edge

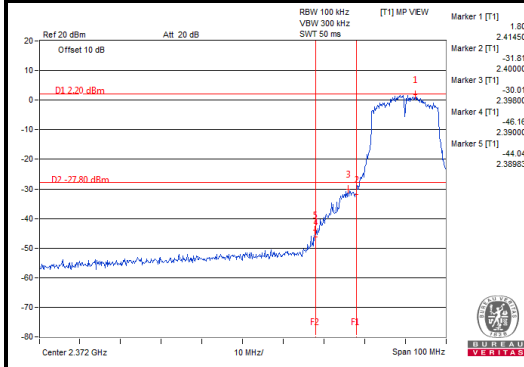

CH 11 Band edge

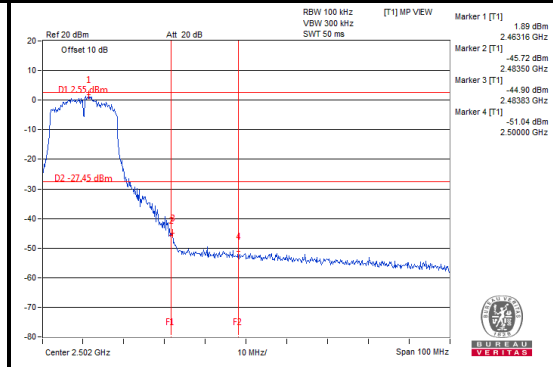

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie  
Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)




BUREAU VERITAS


Test Report No.: RF161208N040

802.11n 20MHz

CHAIN 0

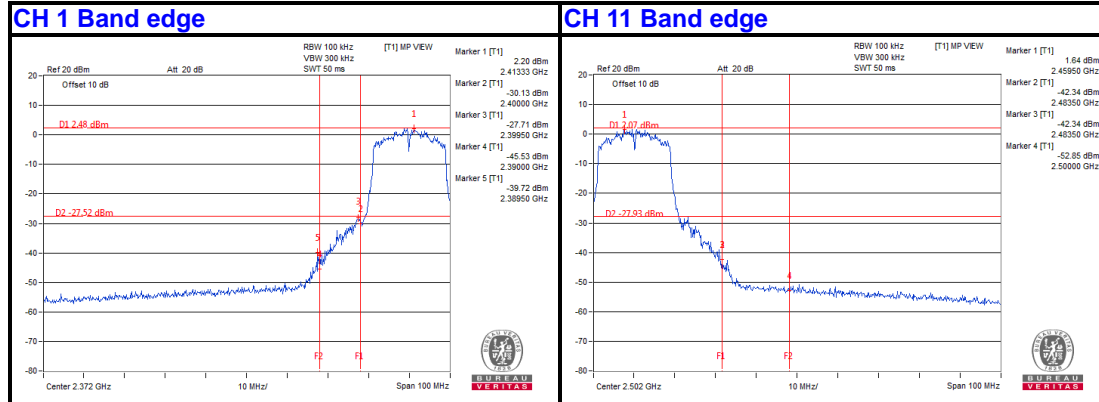

CHAIN 1

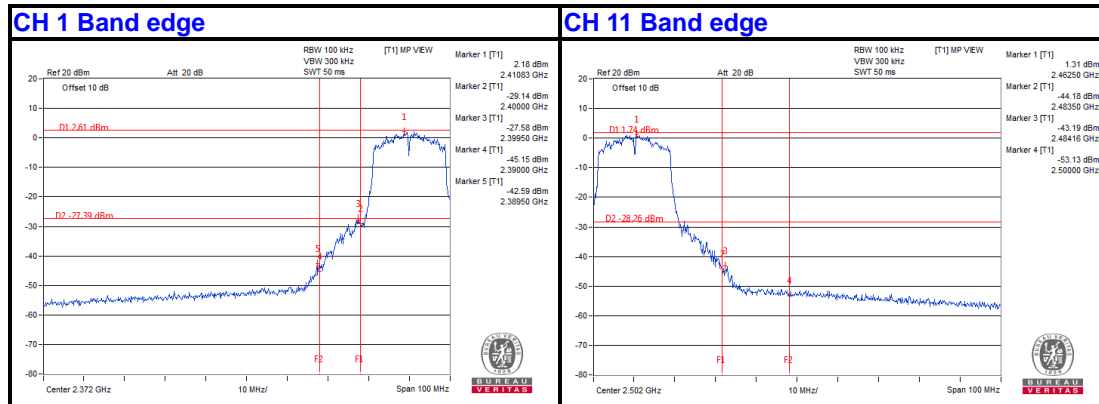






BUREAU VERITAS


Test Report No.: RF161208N040

802.11n 40MHz

CHAIN 0

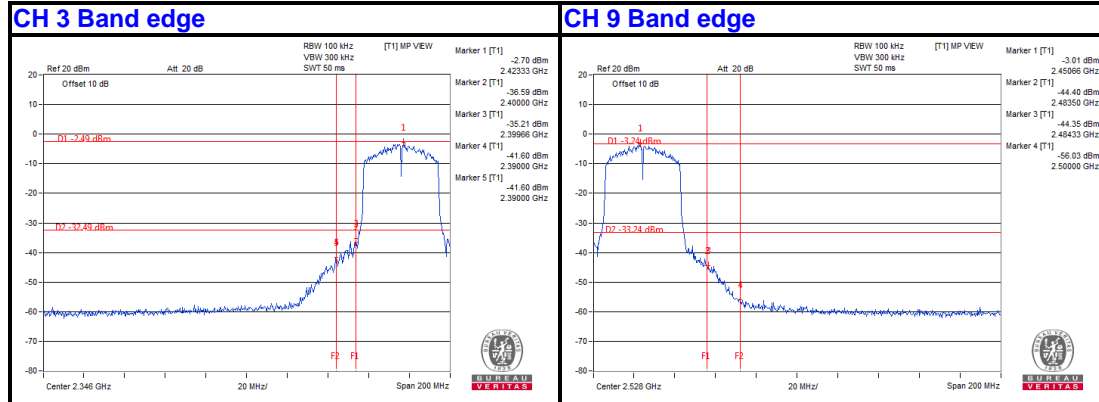

CHAIN 1

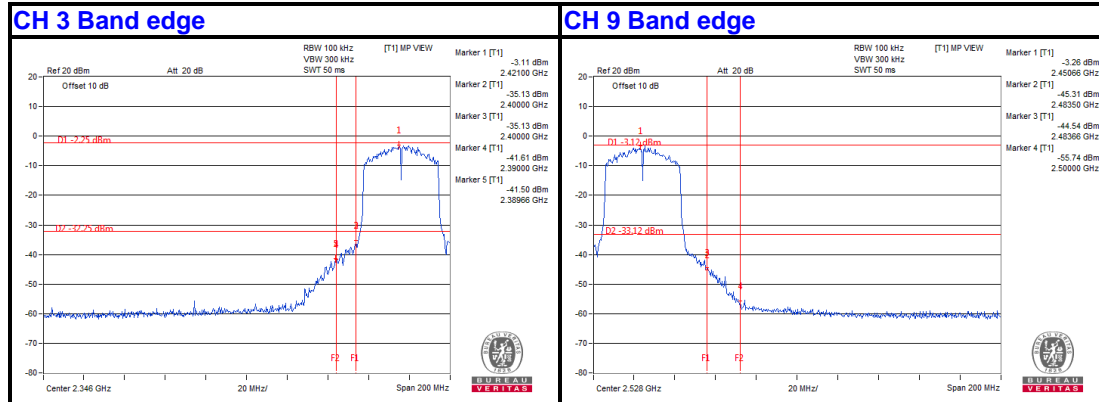



**BUREAU** Test Report No.: RF161208N040  
**VERITAS**

## 5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



**BUREAU** Test Report No.: RF161208N040  
**VERITAS**

## **6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No any modifications are made to the EUT by the lab during the test.

**---END---**