



A D T

FCC TEST REPORT (15.247)

REPORT NO.: RF120807C11
MODEL NO.: TL-WDR3600
FCC ID: TE7WDR3600
IC: 8853A-WDR3600
RECEIVED: Aug. 07, 2012
TESTED: Aug. 08 ~ Aug. 22, 2012
ISSUED: Aug. 30, 2012

APPLICANT: TP-LINK TECHNOLOGIES CO., LTD.

ADDRESS: Building 24 (floors 1, 3, 4, 5) and 28 (floors1-4)
Central Science and Technology Park, Shennan Rd,
Nanshan, Shenzhen, China

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist.,
New Taipei City, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	5
1. CERTIFICATION	6
2. SUMMARY OF TEST RESULTS	7
2.1 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	10
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	11
3.3 DESCRIPTION OF SUPPORT UNITS	15
3.3.1 CONFIGURATION OF SYSTEM UNDER TEST	16
3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS	17
4. TEST TYPES AND RESULTS (FOR 2.4GHz BAND)	18
4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT	18
4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	18
4.1.2 TEST INSTRUMENTS	19
4.1.3 TEST PROCEDURES	20
4.1.4 DEVIATION FROM TEST STANDARD	20
4.1.5 TEST SETUP	21
4.1.6 EUT OPERATING CONDITIONS	21
4.1.7 TEST RESULTS	22
4.2 CONDUCTED EMISSION MEASUREMENT	35
4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	35
4.2.2 TEST INSTRUMENTS	35
4.2.3 TEST PROCEDURES	36
4.2.4 DEVIATION FROM TEST STANDARD	36
4.2.5 TEST SETUP	36
4.2.6 EUT OPERATING CONDITIONS	36
4.2.7 TEST RESULTS	37
4.3 6dB BANDWIDTH MEASUREMENT	39
4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT	39
4.3.2 TEST SETUP	39
4.3.3 TEST INSTRUMENTS	39
4.3.4 TEST PROCEDURE	39
4.3.5 DEVIATION FROM TEST STANDARD	39
4.3.6 EUT OPERATING CONDITIONS	39
4.3.7 TEST RESULTS	40
4.4 CONDUCTED OUTPUT POWER	42
4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	44
4.4.2 TEST SETUP	44
4.4.3 TEST INSTRUMENTS	44
4.4.4 TEST PROCEDURES	44
4.4.5 DEVIATION FROM TEST STANDARD	44
4.4.6 EUT OPERATING CONDITIONS	44
4.4.7 TEST RESULTS	45
4.5 POWER SPECTRAL DENSITY MEASUREMENT	46
4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	46



A D T

4.5.2	TEST SETUP	46
4.5.3	TEST INSTRUMENTS	46
4.5.4	TEST PROCEDURE	46
4.5.5	DEVIATION FROM TEST STANDARD	46
4.5.6	EUT OPERATING CONDITION.....	46
4.5.7	TEST RESULTS	47
4.6	CONDUCTED OUT OF BAND EMISSION MEASUREMENT	49
4.6.1	LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT	49
4.6.2	TEST SETUP	49
4.6.3	TEST INSTRUMENTS	49
4.6.4	TEST PROCEDURE	49
4.6.5	DEVIATION FROM TEST STANDARD	50
4.6.6	EUT OPERATING CONDITION.....	50
4.6.7	TEST RESULTS	50
4.6.8	TEST RESULTS	51
5.	TEST TYPES AND RESULTS (FOR 5.0GHz BAND).....	60
5.1	RADIATED EMISSION MEASUREMENT	60
5.1.1	LIMITS OF RADIATED EMISSION MEASUREMENT	60
5.1.2	TEST INSTRUMENTS	61
5.1.3	TEST PROCEDURES	61
5.1.4	DEVIATION FROM TEST STANDARD	61
5.1.5	TEST SETUP	61
5.1.6	EUT OPERATING CONDITIONS	61
5.1.7	TEST RESULTS	62
5.2	CONDUCTED EMISSION MEASUREMENT	71
5.2.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	71
5.2.2	TEST INSTRUMENTS	71
5.2.3	TEST PROCEDURES	71
5.2.4	DEVIATION FROM TEST STANDARD	71
5.2.5	TEST SETUP	71
5.2.6	EUT OPERATING CONDITIONS	71
5.2.7	TEST RESULTS	72
5.3	6dB BANDWIDTH MEASUREMENT.....	74
5.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	74
5.3.2	TEST SETUP	74
5.3.3	TEST INSTRUMENTS	74
5.3.4	TEST PROCEDURE	74
5.3.5	DEVIATION FROM TEST STANDARD	74
5.3.6	EUT OPERATING CONDITIONS	74
5.3.7	TEST RESULTS	75
5.4	CONDUCTED OUTPUT POWER	76
5.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT.....	78
5.4.2	TEST SETUP	78
5.4.3	INSTRUMENTS	78
5.4.4	TEST PROCEDURES	78
5.4.5	DEVIATION FROM TEST STANDARD	78
5.4.6	EUT OPERATING CONDITIONS	78
5.4.7	TEST RESULTS	79
5.5	POWER SPECTRAL DENSITY MEASUREMENT.....	80



A D T

5.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	80
5.5.2	TEST SETUP	80
5.5.3	TEST INSTRUMENTS	80
5.5.4	TEST PROCEDURE	80
5.5.5	DEVIATION FROM TEST STANDARD	80
5.5.6	EUT OPERATING CONDITION	80
5.5.7	TEST RESULTS	81
5.6	CONDUCTED OUT OF BAND EMISSION MEASUREMENT	82
5.6.1	LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT	82
5.6.2	TEST SETUP	82
5.6.3	TEST INSTRUMENTS	82
5.6.4	TEST PROCEDURE	82
5.6.5	DEVIATION FROM TEST STANDARD	82
5.6.6	EUT OPERATING CONDITION	82
5.6.7	TEST RESULTS	82
6.	PHOTOGRAPHS OF THE TEST CONFIGURATION	86
7.	INFORMATION ON THE TESTING LABORATORIES	92
8.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	93



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF120807C11	Original release	Aug. 30, 2012



A D T

1. CERTIFICATION

PRODUCT: N600 Wireless Dual Band Gigabit Router

MODEL NO.: TL-WDR3600

BRAND: TP-LINK

APPLICANT: TP-LINK TECHNOLOGIES CO., LTD.

TESTED: Aug. 08 ~ Aug. 22, 2012

TEST SAMPLE: PROTOTYPE

STANDARDS: **FCC Part 15, Subpart C (Section 15.247)**

Canada RSS-210 Issue 8 (2010-12)

Canada RSS-Gen Issue 3 (2010-12)

ANSI C63.10-2009

The above equipment (model: TL-WDR3600) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Jemma Yang , DATE : Aug. 30, 2012
Jemma Yang / Specialist

APPROVED BY : Gary Chang , DATE : Aug. 30, 2012
Gary Chang / Technical Manager



2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C (Section 15.247); RSS-210; RSS-Gen				
Standard Section		Test Type and Limit	Result	Remark
FCC Part 15	CANADA STANDARD			
15.207	RSS-Gen 7.2.4	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -6.20dB at 0.52109MHz.
-	RSS-Gen 4.6	Occupied Bandwidth Measurement	PASS	Meet the requirement of limit.
15.247(d) 15.209	RSS-210 A8.5	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -1.0dB at 4924.00MHz and 2390.00MHz.
15.247(d)	RSS-210 A8.5	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	RSS-210 A8.2 (a)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	RSS-210 A8.4 (4)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	RSS-210 A8.2 (b)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	-	Antenna Requirement	PASS	Antenna connector is SMA Male Reverse not a standard connector.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.34 dB
	200MHz ~1000MHz	3.35 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	N600 Wireless Dual Band Gigabit Router
MODEL NO.	TL-WDR3600
POWER SUPPLY	12Vdc (Adapter)
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11.0/ 5.5/ 2.0/ 1.0Mbps 802.11g: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 300.0Mbps
OPERATING FREQUENCY	2.4GHz: 2412 ~ 2462MHz 5.0GHz: 5745 ~ 5825MHz
NUMBER OF CHANNEL	2.4GHz: 11 for 802.11b, 802.11g, 802.11n (20MHz) 7 for 802.11n (40MHz) 5.0GHz: 5 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz)
OUTPUT POWER	698.33mW for 2412 ~ 2462MHz 454.51mW for 5745 ~ 5825MHz
ANTENNA TYPE	2.4GHz: Dipole antenna with 2dBi gain 5.0GHz: Dipole antenna with 3dBi gain
ANTENNA CONNECTOR	SMA Male Reverse
DATA CABLE	N/A
I/O PORTS	Refer to user's manual
ACCESSORY DEVICES	Adapter

NOTE:

1. The frequency bands used in this EUT are listed as follows:

Frequency Band (MHz)	2412~2462	5180~5240	5745~5825
802.11b	√		
802.11g	√		
802.11a		√	√
802.11n (20MHz)	√	√	√
802.11n (40MHz)	√	√	√



A D T

2. The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers.

MODULATION MODE	TX FUNCTION
802.11b	2TX
802.11g	2TX
802.11a	2TX
802.11n (20MHz)	2TX
802.11n (40MHz)	2TX

3. The EUT consumes power from the following adapter.

ADAPTER	
BRAND:	Huntkey
MODEL:	HKA01812015-2K
INPUT:	100-240Vac, 50/60Hz, 0.5A
OUTPUT:	12Vdc, 1.5A
POWER LINE:	1.5m non-shielded cable without core

4. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.



3.2 DESCRIPTION OF TEST MODES

FOR 2.4GHz:

11 channels are provided for 802.11b, 802.11g and 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

FOR 5.0GHz (5745 ~ 5825MHz):

5 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz		

2 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
151	5755MHz	159	5795MHz

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

FOR 2.4GHz:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE \geq 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE \geq 1G**: Radiated Emission above 1GHz **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE:

The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Z-plane**.

RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	7.2
-	802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	15.0

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11g	1 to 11	6	OFDM	BPSK	6.0

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11g	1 to 11	6	OFDM	BPSK	6.0



BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
-	802.11n (20MHz)	1 to 11	1, 11	OFDM	BPSK	7.2
-	802.11n (40MHz)	3 to 9	3, 9	OFDM	BPSK	15.0

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	7.2
-	802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	15.0

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE≥1G	25deg. C, 65%RH	120Vac, 60Hz	Aska Huang
RE<1G	25deg. C, 65%RH	120Vac, 60Hz	Aska Huang
PLC	25deg. C, 65%RH	120Vac, 60Hz	Anderson Hong
APCM	22deg. C, 61%RH	120Vac, 60Hz	Felix Soong



FOR 5.0GHz (5745 ~ 5825MHz):

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE≥1G**: Radiated Emission above 1GHz **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE:
The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Z-plane**.

RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6.0
-	802.11n (20MHz)	149 to 165	149, 157, 165	OFDM	BPSK	7.2
-	802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	15.0

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11a	149 to 165	149	OFDM	BPSK	6.0

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11a	149 to 165	149	OFDM	BPSK	6.0



BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11a	149 to 165	149, 165	OFDM	BPSK	6.0
-	802.11n (20MHz)	149 to 165	149, 165	OFDM	BPSK	7.2
-	802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	15.0

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6.0
-	802.11n (20MHz)	149 to 165	149, 157, 165	OFDM	BPSK	7.2
-	802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	15.0

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE≥1G	25deg. C, 65%RH	120Vac, 60Hz	Aska Huang
	25deg. C, 65%RH	120Vac, 60Hz	Haru Yang
	25deg. C, 65%RH	120Vac, 60Hz	Chris Lin
RE<1G	25deg. C, 65%RH	120Vac, 60Hz	Aska Huang
PLC	25deg. C, 65%RH	120Vac, 60Hz	Anderson Hong
APCM	22deg. C, 61%RH	120Vac, 60Hz	Felix Soong



A D T

3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Notebook	DELL	E5420	33MKMQ1	FCC DoC Approved
2	Notebook	DELL	E5410	1HC2XM1	FCC DoC Approved
3	JetFlash V85 4GB	Transcend	V85	569992-8271	NA
4	JetFlash V85 4GB	Transcend	V85	569992-8208	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	10m non-shielded RJ45 cable.
2	10m non-shielded RJ45 cable.
3	NA
4	NA

NOTE:

1. All power cords of the above support units are non shielded (1.8m).
2. Item 1, 2 acted as communication partner to transfer data.

3.3.1 CONFIGURATION OF SYSTEM UNDER TEST

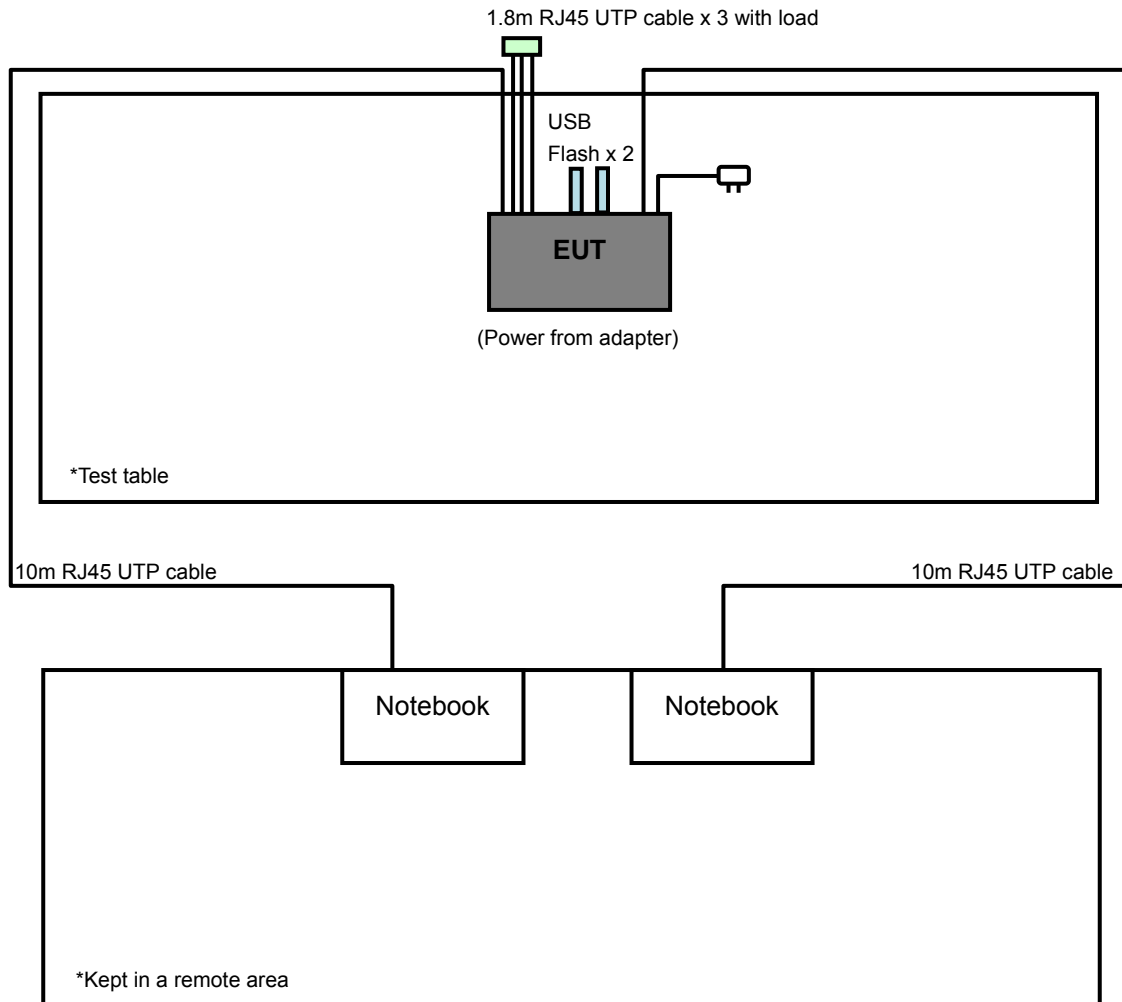



A D T

3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

558074 D01 DTS Meas Guidance v01

Canada RSS-210 Issue 8 (2010-12)

Canada RSS-Gen Issue 3 (2010-12)

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



4. TEST TYPES AND RESULTS (FOR 2.4GHz BAND)

4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



ADT

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESIB7	100212	Aug. 06, 2012	Aug. 05, 2013
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Feb. 03, 2012	Feb. 02, 2013
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Apr. 06, 2012	Apr. 05, 2013
HORN Antenna SCHWARZBECK	9120D	209	Aug. 25, 2011	Aug. 24, 2012
HORN Antenna SCHWARZBECK	BBHA 9170	148	Jul. 11, 2012	Jul. 10, 2013
Preamplifier Agilent	8447D	2944A10633	Oct. 29, 2011	Oct. 28, 2012
Preamplifier Agilent	8449B	3008A01964	Oct. 29, 2011	Oct. 28, 2012
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250723/4	Aug. 30, 2011	Aug. 29, 2012
RF signal cable HUBER+SUHNNER	SUCOFLEX 106	12738/6+309224/4	Aug. 30, 2011	Aug. 29, 2012
Software ADT.	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA	NA
Turn Table ADT.	TT100	TT93021703	NA	NA
Turn Table Controller ADT.	SC100	SC93021703	NA	NA
26GHz ~ 40GHz Amplifier	EM26400	815221	Oct. 29, 2011	Oct. 28, 2012
High Speed Peak Power Meter	ML2495A	0842014	Apr. 28, 2012	Apr. 27, 2013
Power Sensor	MA2411B	0738404	Apr. 28, 2012	Apr. 27, 2013

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The calibration interval of the loop antenna is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in HwaYa Chamber 3.
4. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
5. The FCC Site Registration No. is 988962.
6. The IC Site Registration No. is 7450F-3.



A D T

4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 100kHz and video bandwidth is 300kHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 1kHz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

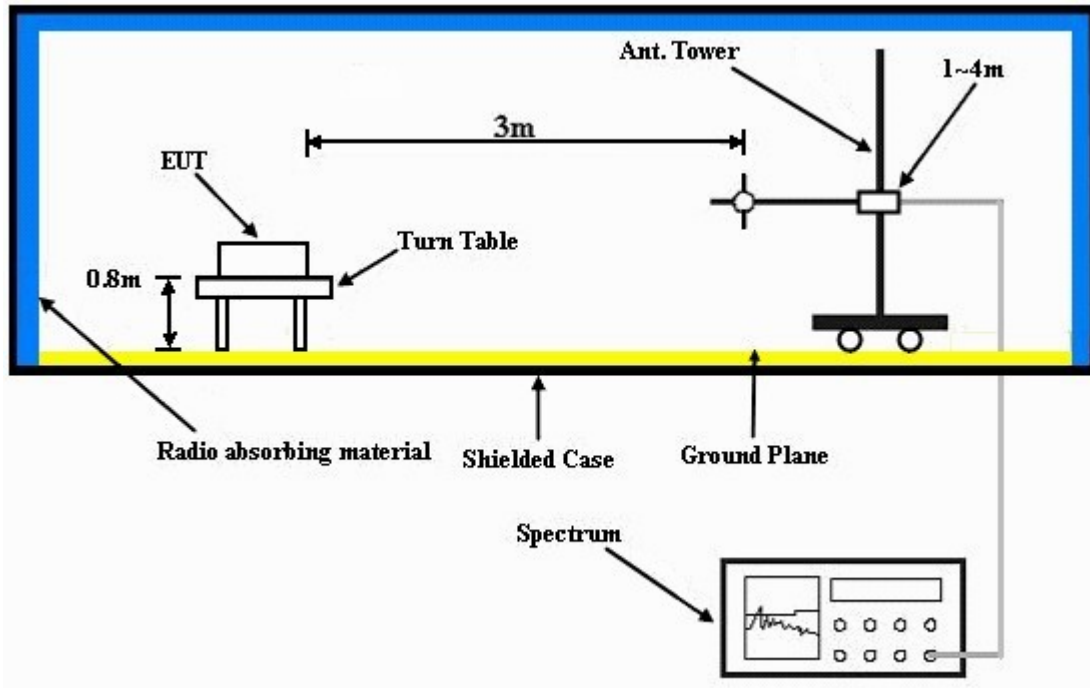

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on the testing table.
- b. Prepared notebooks to act as communication partner and placed it outside of testing area.
- c. The communication partner connected with EUT via a RJ45 cable and run a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.



A D T

4.1.7 TEST RESULT

802.11b

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Aska Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.9 PK	74.0	-18.1	1.00 H	124	24.60	31.30
2	2390.00	43.8 AV	54.0	-10.2	1.00 H	124	12.50	31.30
3	*2412.00	105.5 PK			1.00 H	124	74.10	31.40
4	*2412.00	101.3 AV			1.00 H	124	69.90	31.40
5	4824.00	50.8 PK	74.0	-23.2	1.82 H	54	13.60	37.20
6	4824.00	46.1 AV	54.0	-7.9	1.82 H	54	8.90	37.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.6 PK	74.0	-13.4	1.43 V	64	29.30	31.30
2	2390.00	46.3 AV	54.0	-7.7	1.43 V	64	15.00	31.30
3	*2412.00	109.8 PK			1.00 V	351	78.40	31.40
4	*2412.00	105.6 AV			1.00 V	351	74.20	31.40
5	4824.00	53.5 PK	74.0	-20.5	1.00 V	144	16.30	37.20
6	4824.00	50.6 AV	54.0	-3.4	1.00 V	144	13.40	37.20

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Aska Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	104.2 PK			1.00 H	213	72.70	31.50
2	*2437.00	100.1 AV			1.00 H	213	68.60	31.50
3	4874.00	51.0 PK	74.0	-23.0	1.90 H	52	13.70	37.30
4	4874.00	46.8 AV	54.0	-7.2	1.90 H	52	9.50	37.30
5	7311.00	51.6 PK	74.0	-22.4	1.00 H	25	8.10	43.50
6	7311.00	39.7 AV	54.0	-14.3	1.00 H	25	-3.80	43.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	108.3 PK			1.67 V	15	76.80	31.50
2	*2437.00	103.9 AV			1.67 V	15	72.40	31.50
3	4874.00	55.3 PK	74.0	-18.7	1.35 V	35	18.00	37.30
4	4874.00	52.8 AV	54.0	-1.2	1.35 V	35	15.50	37.30
5	7311.00	51.4 PK	74.0	-22.6	1.37 V	229	7.90	43.50
6	7311.00	40.8 AV	54.0	-13.2	1.37 V	229	-2.70	43.50

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Aska Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	104.3 PK			1.00 H	121	72.70	31.60
2	*2462.00	100.1 AV			1.00 H	121	68.50	31.60
3	2483.50	54.4 PK	74.0	-19.6	1.00 H	121	22.80	31.60
4	2483.50	42.3 AV	54.0	-11.7	1.00 H	121	10.70	31.60
5	4924.00	51.0 PK	74.0	-23.0	1.45 H	54	13.60	37.40
6	4924.00	46.0 AV	54.0	-8.0	1.45 H	54	8.60	37.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	109.1 PK			1.42 V	350	77.50	31.60
2	*2462.00	104.8 AV			1.42 V	350	73.20	31.60
3	2483.50	55.5 PK	74.0	-18.5	1.00 V	350	23.90	31.60
4	2483.50	46.2 AV	54.0	-7.8	1.00 V	350	14.60	31.60
5	4924.00	55.7 PK	74.0	-18.3	1.34 V	34	18.30	37.40
6	4924.00	53.0 AV	54.0	-1.0	1.34 V	34	15.60	37.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

802.11g

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Aska Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.1 PK	74.0	-13.9	1.00 H	123	28.80	31.30
2	2390.00	46.9 AV	54.0	-7.1	1.00 H	123	15.60	31.30
3	*2412.00	105.1 PK			1.00 H	123	73.70	31.40
4	*2412.00	95.9 AV			1.00 H	123	64.50	31.40
5	4824.00	46.6 PK	74.0	-27.4	1.48 H	53	9.40	37.20
6	4824.00	34.2 AV	54.0	-19.8	1.48 H	53	-3.00	37.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.7 PK	74.0	-5.3	1.23 V	351	37.40	31.30
2	2390.00	50.2 AV	54.0	-3.8	1.23 V	351	18.90	31.30
3	*2412.00	109.7 PK			1.00 V	333	78.30	31.40
4	*2412.00	100.0 AV			1.00 V	333	68.60	31.40
5	4824.00	47.8 PK	74.0	-26.2	1.00 V	143	10.60	37.20
6	4824.00	35.5 AV	54.0	-18.5	1.00 V	143	-1.70	37.20

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Aska Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	108.9 PK			1.00 H	124	77.40	31.50
2	*2437.00	99.7 AV			1.00 H	124	68.20	31.50
3	4874.00	53.8 PK	74.0	-20.2	1.00 H	296	16.50	37.30
4	4874.00	39.0 AV	54.0	-15.0	1.00 H	296	1.70	37.30
5	7311.00	59.1 PK	74.0	-14.9	1.36 H	168	15.60	43.50
6	7311.00	45.4 AV	54.0	-8.6	1.36 H	168	1.90	43.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	113.9 PK			1.42 V	343	82.40	31.50
2	*2437.00	104.5 AV			1.42 V	343	73.00	31.50
3	4874.00	56.1 PK	74.0	-17.9	1.21 V	38	18.80	37.30
4	4874.00	41.4 AV	54.0	-12.6	1.21 V	38	4.10	37.30
5	7311.00	59.2 PK	74.0	-14.8	1.11 V	351	15.70	43.50
6	7311.00	45.1 AV	54.0	-8.9	1.11 V	351	1.60	43.50

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Aska Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	105.3 PK			1.00 H	122	73.70	31.60
2	*2462.00	95.3 AV			1.00 H	122	63.70	31.60
3	2483.50	60.3 PK	74.0	-13.7	1.00 H	122	28.70	31.60
4	2483.50	45.8 AV	54.0	-8.2	1.00 H	122	14.20	31.60
5	4924.00	46.7 PK	74.0	-27.3	1.47 H	58	9.30	37.40
6	4924.00	34.9 AV	54.0	-19.1	1.47 H	58	-2.50	37.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	109.8 PK			1.41 V	355	78.20	31.60
2	*2462.00	100.0 AV			1.41 V	355	68.40	31.60
3	2483.50	66.5 PK	74.0	-7.5	1.41 V	355	34.90	31.60
4	2483.50	52.3 AV	54.0	-1.7	1.41 V	355	20.70	31.60
5	4924.00	51.4 PK	74.0	-22.6	1.08 V	309	14.00	37.40
6	4924.00	39.5 AV	54.0	-14.5	1.08 V	309	2.10	37.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

802.11n (20MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Aska Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.3 PK	74.0	-13.7	1.00 H	123	29.00	31.30
2	2390.00	47.2 AV	54.0	-6.8	1.00 H	123	15.90	31.30
3	*2412.00	104.9 PK			1.00 H	123	73.50	31.40
4	*2412.00	95.7 AV			1.00 H	123	64.30	31.40
5	4824.00	46.5 PK	74.0	-27.5	1.55 H	56	9.30	37.20
6	4824.00	34.1 AV	54.0	-19.9	1.55 H	56	-3.10	37.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.4 PK	74.0	-7.6	1.27 V	357	35.10	31.30
2	2390.00	51.7 AV	54.0	-2.3	1.27 V	357	20.40	31.30
3	*2412.00	109.6 PK			1.00 V	340	78.20	31.40
4	*2412.00	99.8 AV			1.00 V	340	68.40	31.40
5	4824.00	48.1 PK	74.0	-25.9	1.00 V	152	10.90	37.20
6	4824.00	35.7 AV	54.0	-18.3	1.00 V	152	-1.50	37.20

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Aska Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	108.6 PK			1.00 H	121	77.10	31.50
2	*2437.00	99.5 AV			1.00 H	121	68.00	31.50
3	4874.00	53.6 PK	74.0	-20.4	1.00 H	301	16.30	37.30
4	4874.00	39.1 AV	54.0	-14.9	1.00 H	301	1.80	37.30
5	7311.00	59.3 PK	74.0	-14.7	1.29 H	156	15.80	43.50
6	7311.00	45.3 AV	54.0	-8.7	1.29 H	156	1.80	43.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	113.7 PK			1.39 V	351	82.20	31.50
2	*2437.00	104.4 AV			1.39 V	351	72.90	31.50
3	4874.00	46.3 PK	74.0	-27.7	1.15 V	52	9.00	37.30
4	4874.00	41.2 AV	54.0	-12.8	1.15 V	52	3.90	37.30
5	7311.00	59.4 PK	74.0	-14.6	1.05 V	343	15.90	43.50
6	7311.00	45.4 AV	54.0	-8.6	1.05 V	343	1.90	43.50

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Aska Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	105.7 PK			1.00 H	125	74.10	31.60
2	*2462.00	95.8 AV			1.00 H	125	64.20	31.60
3	2483.50	60.5 PK	74.0	-13.5	1.00 H	125	28.90	31.60
4	2483.50	46.1 AV	54.0	-7.9	1.00 H	125	14.50	31.60
5	4924.00	46.9 PK	74.0	-27.1	1.50 H	51	9.50	37.40
6	4924.00	35.0 AV	54.0	-19.0	1.50 H	51	-2.40	37.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	110.3 PK			1.41 V	350	78.70	31.60
2	*2462.00	100.4 AV			1.41 V	350	68.80	31.60
3	2483.50	68.7 PK	74.0	-5.3	1.42 V	350	37.10	31.60
4	2483.50	52.7 AV	54.0	-1.3	1.42 V	350	21.10	31.60
5	4924.00	51.7 PK	74.0	-22.3	1.11 V	312	14.30	37.40
6	4924.00	39.9 AV	54.0	-14.1	1.11 V	312	2.50	37.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

802.11n (40MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 3	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Aska Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.4 PK	74.0	-12.6	1.00 H	124	30.10	31.30
2	2390.00	46.6 AV	54.0	-7.4	1.00 H	124	15.30	31.30
3	*2422.00	98.0 PK			1.00 H	124	66.60	31.40
4	*2422.00	88.9 AV			1.00 H	124	57.50	31.40
5	4844.00	45.2 PK	74.0	-28.8	1.00 H	213	7.90	37.30
6	4844.00	33.0 AV	54.0	-21.0	1.00 H	213	-4.30	37.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.0 PK	74.0	-7.0	1.00 V	322	35.70	31.30
2	2390.00	49.8 AV	54.0	-4.2	1.00 V	322	18.50	31.30
3	*2422.00	102.3 PK			1.00 V	341	70.90	31.40
4	*2422.00	93.2 AV			1.00 V	341	61.80	31.40
5	4844.00	46.2 PK	74.0	-27.8	1.00 V	163	8.90	37.30
6	4844.00	33.5 AV	54.0	-20.5	1.00 V	163	-3.80	37.30

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Aska Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.7 PK	74.0	-13.3	1.00 H	121	29.40	31.30
2	2390.00	45.2 AV	54.0	-8.8	1.00 H	121	13.90	31.30
3	*2437.00	102.5 PK			1.00 H	121	71.00	31.50
4	*2437.00	93.4 AV			1.00 H	121	61.90	31.50
5	4874.00	45.6 PK	74.0	-28.4	1.00 H	169	8.30	37.30
6	4874.00	33.5 AV	54.0	-20.5	1.00 H	169	-3.80	37.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.6 PK	74.0	-5.4	1.00 V	335	37.30	31.30
2	2390.00	53.0 AV	54.0	-1.0	1.00 V	335	21.70	31.30
3	*2437.00	108.6 PK			1.47 V	340	77.10	31.50
4	*2437.00	99.3 AV			1.47 V	340	67.80	31.50
5	4874.00	47.9 PK	74.0	-26.1	1.00 V	159	10.60	37.30
6	4874.00	35.8 AV	54.0	-18.2	1.00 V	159	-1.50	37.30

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 9	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Aska Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	99.8 PK			1.00 H	122	68.30	31.50
2	*2452.00	90.6 AV			1.00 H	122	59.10	31.50
3	2483.50	64.2 PK	74.0	-9.8	1.00 H	122	32.60	31.60
4	2483.50	46.2 AV	54.0	-7.8	1.00 H	122	14.60	31.60
5	4904.00	45.8 PK	74.0	-28.2	1.00 H	216	8.40	37.40
6	4904.00	32.7 AV	54.0	-21.3	1.00 H	216	-4.70	37.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	105.1 PK			1.43 V	342	73.60	31.50
2	*2452.00	95.4 AV			1.43 V	342	63.90	31.50
3	2483.50	69.0 PK	74.0	-5.0	1.48 V	324	37.40	31.60
4	2483.50	52.9 AV	54.0	-1.1	1.48 V	324	21.30	31.60
5	4904.00	47.4 PK	74.0	-26.6	1.00 V	164	10.00	37.40
6	4904.00	35.0 AV	54.0	-19.0	1.00 V	164	-2.40	37.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

BELOW 1GHz WORST-CASE DATA : 802.11g

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Aska Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	39.62	25.5 QP	40.0	-14.5	1.50 H	4	11.90	13.60
2	125.17	33.6 QP	43.5	-9.9	1.50 H	268	21.30	12.30
3	228.22	37.3 QP	46.0	-8.7	1.24 H	243	25.20	12.10
4	374.04	38.6 QP	46.0	-7.4	1.00 H	219	21.70	16.90
5	479.03	39.0 QP	46.0	-7.0	1.00 H	239	19.60	19.40
6	624.85	38.8 QP	46.0	-7.2	1.24 H	20	16.50	22.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	35.73	36.2 QP	40.0	-3.8	1.00 V	217	23.20	13.00
2	374.04	37.3 QP	46.0	-8.7	1.50 V	45	20.40	16.90
3	479.03	42.1 QP	46.0	-3.9	1.00 V	125	22.70	19.40
4	539.30	38.3 QP	46.0	-7.7	1.00 V	335	17.50	20.80
5	624.85	38.3 QP	46.0	-7.7	1.00 V	7	16.00	22.30
6	961.21	38.3 QP	54.0	-15.7	1.00 V	127	10.90	27.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:** 1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100289	Nov. 19, 2011	Nov. 18, 2012
RF signal cable Woken	5D-FB	Cable-HYCO2-01	Dec. 29, 2011	Dec. 28, 2012
LISN ROHDE & SCHWARZ	ESH2-Z5	100100	Dec. 30, 2011	Dec. 29, 2012
LISN ROHDE & SCHWARZ	ESH3-Z5	100312	Jul. 06, 2012	Jul. 05, 2013
Software ADT	ADT_Cond_ V7.3.7	NA	NA	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 2.
 3. The VCCI Site Registration No. is C-2047.

4.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

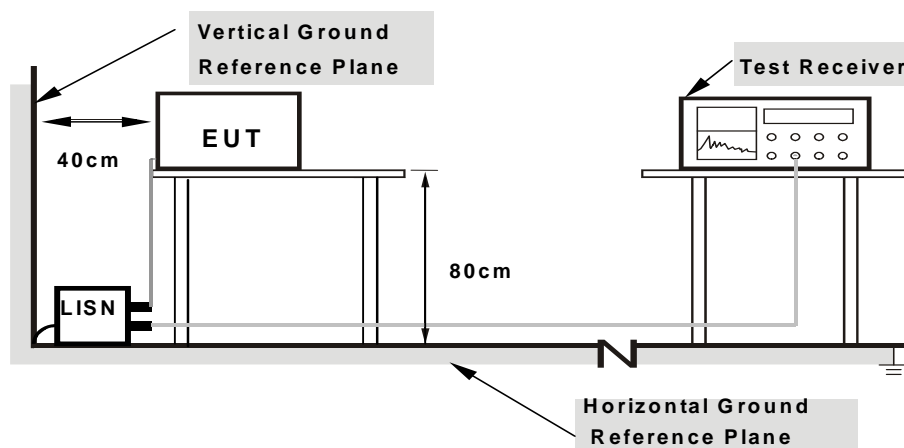

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.



A D T

4.2.7 TEST RESULTS


CONDUCTED WORST-CASE DATA : 802.11g

PHASE	Line 1	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15000	0.17	44.22	32.78	44.39	32.95	66.00
2	0.21250	0.17	39.43	29.14	39.60	29.31	63.11	53.11	-23.51	-23.80
3	0.52109	0.21	48.90	39.59	49.11	39.80	56.00	46.00	-6.89	-6.20
4	0.75547	0.22	34.32	18.45	34.54	18.67	56.00	46.00	-21.46	-27.33
5	6.95703	0.43	35.10	27.45	35.53	27.88	60.00	50.00	-24.47	-22.12
6	18.77734	0.70	32.18	26.39	32.88	27.09	60.00	50.00	-27.12	-22.91

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

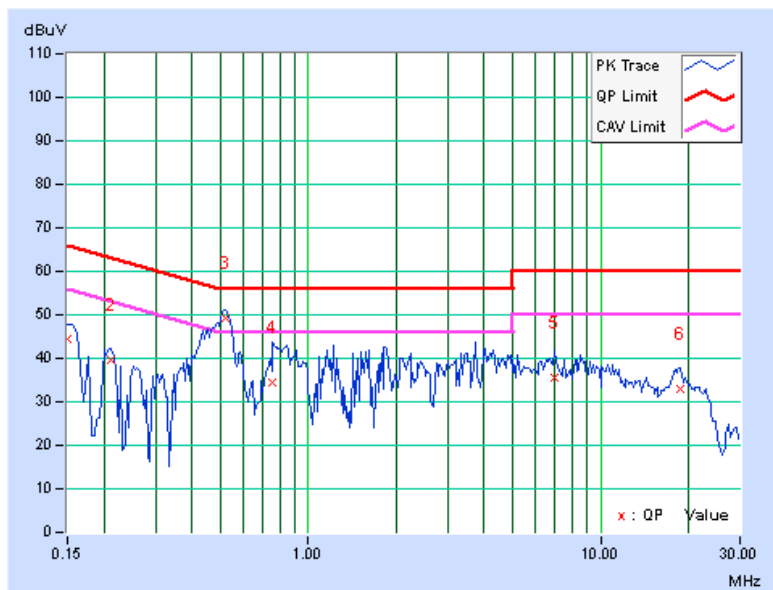


PHASE	Line 2	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16562	0.16	37.42	16.99	37.58	17.15	65.18	55.18	-27.59	-38.02
2	0.20078	0.15	40.83	25.94	40.98	26.09	63.58	53.58	-22.60	-27.49
3	0.51328	0.18	44.18	33.82	44.36	34.00	56.00	46.00	-11.64	-12.00
4	0.86875	0.19	30.09	17.12	30.28	17.31	56.00	46.00	-25.72	-28.69
5	9.08594	0.54	30.32	23.52	30.86	24.06	60.00	50.00	-29.14	-25.94
6	18.53516	0.78	32.24	26.53	33.02	27.31	60.00	50.00	-26.98	-22.69

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

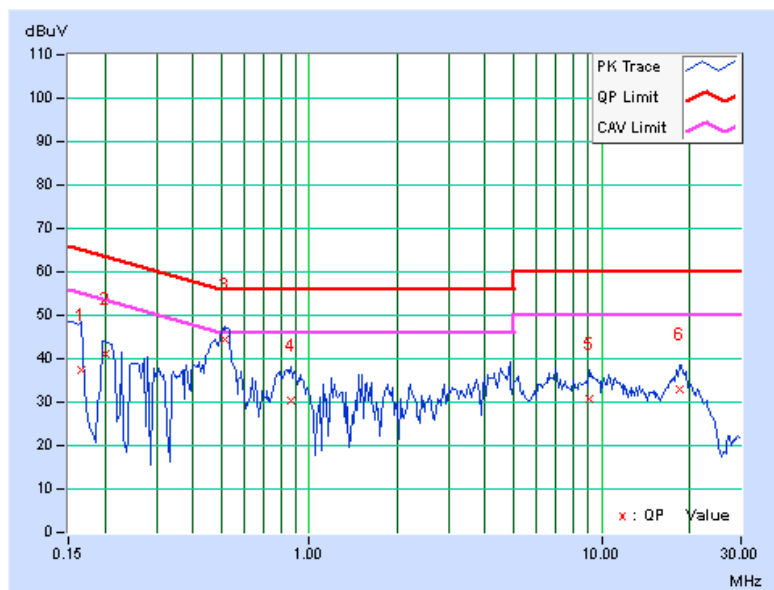


4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST SETUP

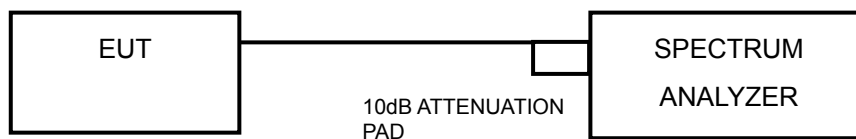

4.3.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.3.4 TEST PROCEDURE

- a. Set resolution bandwidth (RBW) = approximately 1% of the emission bandwidth
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 DEVIATION FROM TEST STANDARD

No deviation.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.3.7 TEST RESULTS

802.11b

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	10.28	10.29	0.5	PASS
6	2437	10.29	10.30	0.5	PASS
11	2462	10.28	10.29	0.5	PASS

802.11g

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	16.56	16.56	0.5	PASS
6	2437	16.54	16.52	0.5	PASS
11	2462	16.55	16.47	0.5	PASS

802.11n (20MHz)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	17.78	17.79	0.5	PASS
6	2437	17.77	17.76	0.5	PASS
11	2462	17.83	17.75	0.5	PASS




A D T

802.11n (40MHz)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
3	2422	36.88	37.55	0.5	PASS
6	2437	37.06	37.35	0.5	PASS
9	2452	37.10	37.04	0.5	PASS

4.4 OCCUPIED BANDWIDTH MEASUREMENT

4.4.1 TEST SETUP

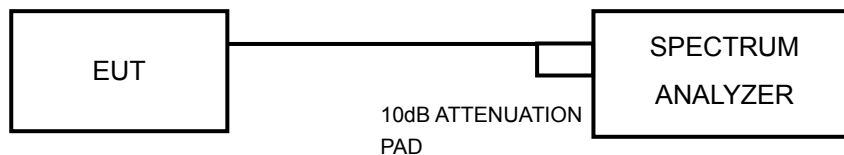

4.4.2 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.4.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 300 kHz VBW. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.4.6 TEST RESULTS

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	OCCUPIED BANDWIDTH (MHz)		PASS / FAIL
		CHAIN 0	CHAIN 1	
1	2412	13.92	13.92	PASS
6	2437	13.92	13.92	PASS
11	2462	13.92	13.92	PASS

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	OCCUPIED BANDWIDTH (MHz)		PASS / FAIL
		CHAIN 0	CHAIN 1	
1	2412	16.92	17.16	PASS
6	2437	17.10	17.28	PASS
11	2462	16.92	17.22	PASS

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	OCCUPIED BANDWIDTH (MHz)		PASS / FAIL
		CHAIN 0	CHAIN 1	
1	2412	18.12	18.18	PASS
6	2437	18.24	18.36	PASS
11	2462	18.24	18.36	PASS

802.11n (40MHz)


CHANNEL	CHANNEL FREQUENCY (MHz)	OCCUPIED BANDWIDTH (MHz)		PASS / FAIL
		CHAIN 0	CHAIN 1	
1	2412	38.40	39.52	PASS
6	2437	39.04	39.68	PASS
11	2462	38.72	39.36	PASS

4.5 CONDUCTED OUTPUT POWER

4.5.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

4.5.2 TEST SETUP

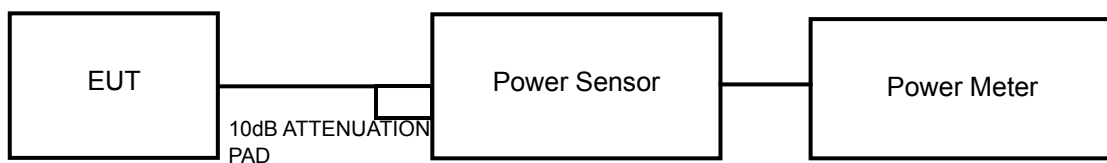

4.5.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.5.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the peak power level.

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

4.5.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.



4.5.7 TEST RESULTS

802.11b

CHAN.	FREQUE NCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	18.39	18.31	136.79	21.36	30	PASS
6	2437	17.46	17.63	113.66	20.56	30	PASS
11	2462	16.86	17.58	105.81	20.25	30	PASS

NOTE: Directional gain = $2\text{dBi} + 10\log(2) = 5.01\text{dBi} < 6\text{dBi}$, therefore the limit no need to reduced.

802.11g

CHAN.	FREQUE NCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	22.93	23.46	418.16	26.21	30	PASS
6	2437	25.63	25.11	689.93	28.39	30	PASS
11	2462	22.35	23.42	391.58	25.93	30	PASS

NOTE: Directional gain = $2\text{dBi} + 10\log(2) = 5.01\text{dBi} < 6\text{dBi}$, therefore the limit no need to reduced.

802.11n (20MHz)

CHAN.	FREQUE NCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	22.94	23.24	407.65	26.10	30	PASS
6	2437	25.21	25.64	698.33	28.44	30	PASS
11	2462	22.20	22.26	334.23	25.24	30	PASS

NOTE: Directional gain = $2\text{dBi} + 10\log(2) = 5.01\text{dBi} < 6\text{dBi}$, therefore the limit no need to reduced.

802.11n (40MHz)

CHAN.	FREQUE NCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
3	2422	20.13	19.63	194.87	22.90	30	PASS
6	2437	24.08	24.06	510.54	27.08	30	PASS
9	2452	21.12	20.64	245.30	23.90	30	PASS


NOTE: Directional gain = $2\text{dBi} + 10\log(2) = 5.01\text{dBi} < 6\text{dBi}$, therefore the limit no need to reduced.

4.6 POWER SPECTRAL DENSITY MEASUREMENT

4.6.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.6.2 TEST SETUP



4.6.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.6.4 TEST PROCEDURE

- a. Set the RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
- b. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
- c. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- d. Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(3 \text{ kHz}/100\text{kHz})$

4.6.5 DEVIATION FROM TEST STANDARD

No deviation.

4.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6



A D T

4.6.7 TEST RESULTS

802.11b

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	6.62	-8.61	3.01	-5.60	8	PASS
	6	2437	5.63	-9.60	3.01	-6.59	8	PASS
	11	2462	5.45	-9.78	3.01	-6.77	8	PASS
1	1	2412	6.44	-8.79	3.01	-5.78	8	PASS
	6	2437	6.10	-9.13	3.01	-6.12	8	PASS
	11	2462	6.14	-9.09	3.01	-6.08	8	PASS

NOTE: Directional gain = 2dBi + 10log(2) = 5.01dBi < 6dBi , therefore the limit no need to reduced.

802.11g

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	3.67	-11.56	3.01	-8.55	8	PASS
	6	2437	8.50	-6.73	3.01	-3.72	8	PASS
	11	2462	2.92	-12.31	3.01	-9.30	8	PASS
1	1	2412	3.68	-11.55	3.01	-8.54	8	PASS
	6	2437	7.46	-7.77	3.01	-4.76	8	PASS
	11	2462	3.43	-11.80	3.01	-8.79	8	PASS

NOTE: Directional gain = 2dBi + 10log(2) = 5.01dBi < 6dBi , therefore the limit no need to reduced.

802.11n (20MHz)

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	3.29	-11.94	3.01	-8.93	8	PASS
	6	2437	7.70	-7.53	3.01	-4.52	8	PASS
	11	2462	2.62	-12.61	3.01	-9.60	8	PASS
1	1	2412	3.57	-11.66	3.01	-8.65	8	PASS
	6	2437	7.77	-7.46	3.01	-4.45	8	PASS
	11	2462	2.67	-12.56	3.01	-9.55	8	PASS

NOTE: Directional gain = 2dBi + 10log(2) = 5.01dBi < 6dBi , therefore the limit no need to reduced.



A D T

802.11n (40MHz)

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	3	2422	-3.57	-18.80	3.01	-15.79	8	PASS
	6	2437	1.43	-13.80	3.01	-10.79	8	PASS
	9	2452	-2.03	-17.26	3.01	-14.25	8	PASS
1	3	2422	-2.99	-18.22	3.01	-15.21	8	PASS
	6	2437	0.79	-14.44	3.01	-11.43	8	PASS
	9	2452	-1.70	-16.93	3.01	-13.92	8	PASS


NOTE: Directional gain = $2\text{dBi} + 10\log(2) = 5.01\text{dBi} < 6\text{dBi}$, therefore the limit no need to reduced.

4.7 CONDUCTED OUT OF BAND EMISSION MEASUREMENT

4.7.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.7.2 TEST SETUP



4.7.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.7.4 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



A D T

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined.
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.7.5 DEVIATION FROM TEST STANDARD

No deviation.

4.7.6 EUT OPERATING CONDITION

Same as Item 4.3.6

4.7.7 TEST RESULTS


The conducted emission test is performed on each TX port of operating mode without summing or adding $10\log(N)$ since the limit is relative emission limit. Only worst data of each operating mode is presented.

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.


4.7.8 TEST RESULTS

802.11b


CH 1



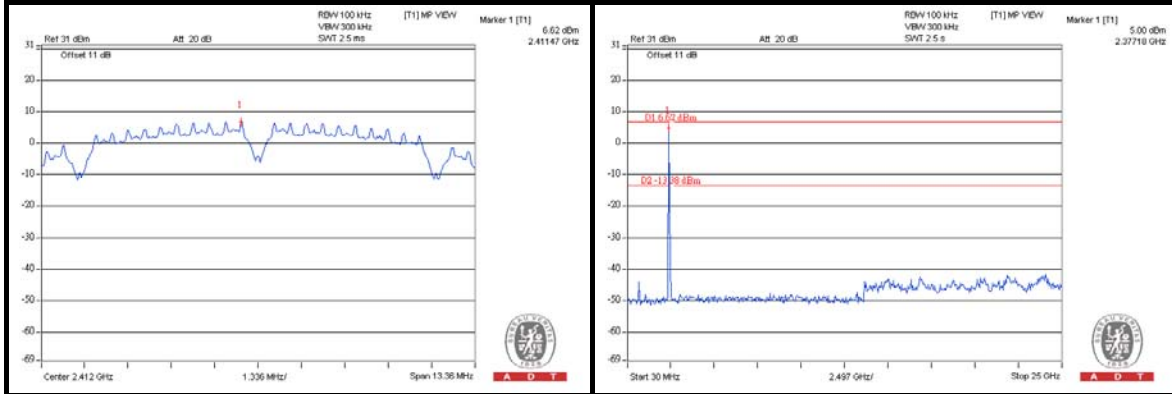


CH 6

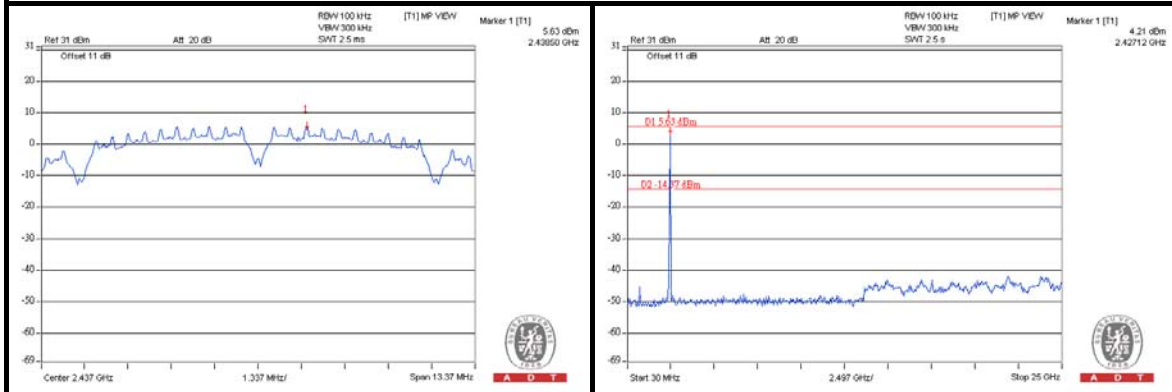

CH 11

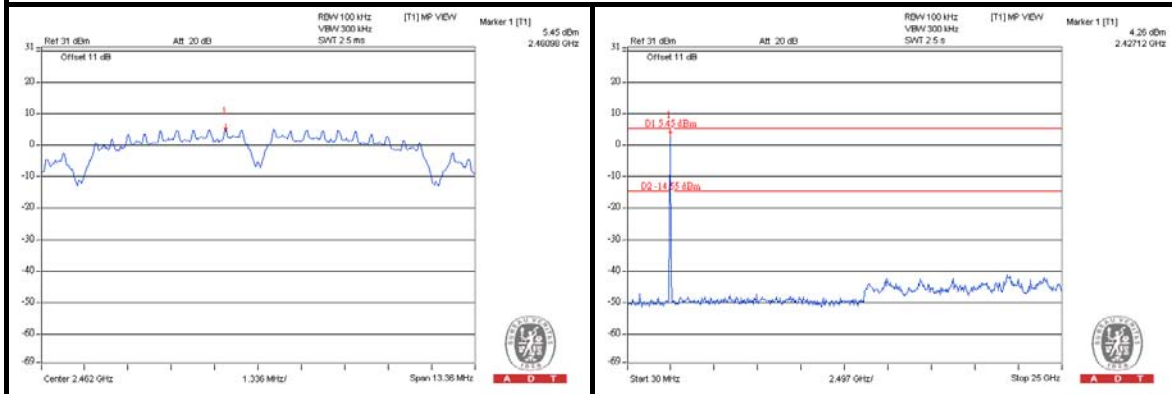

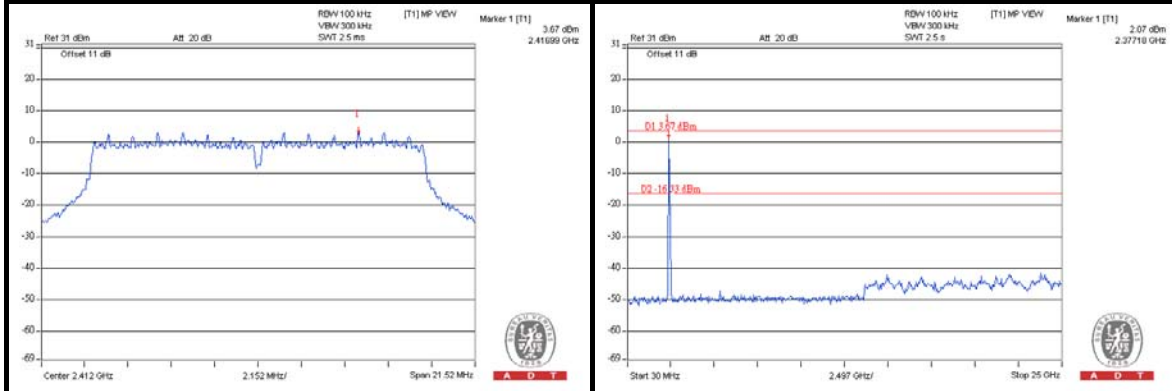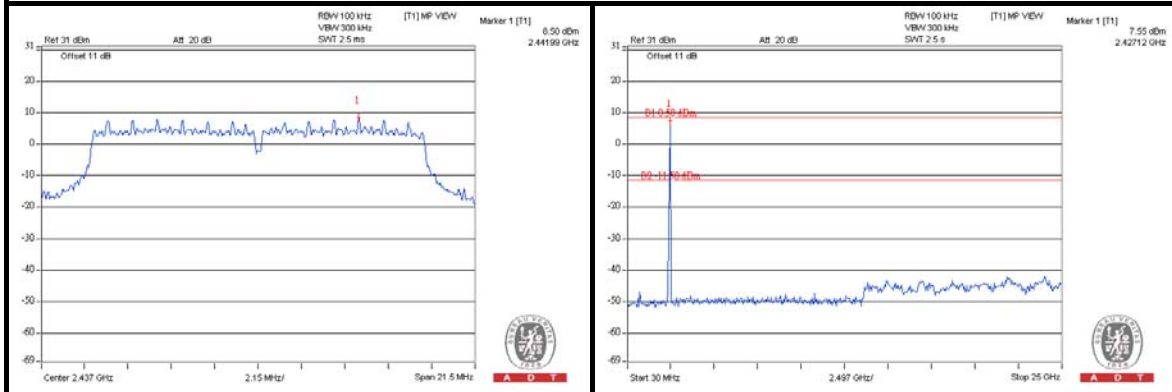
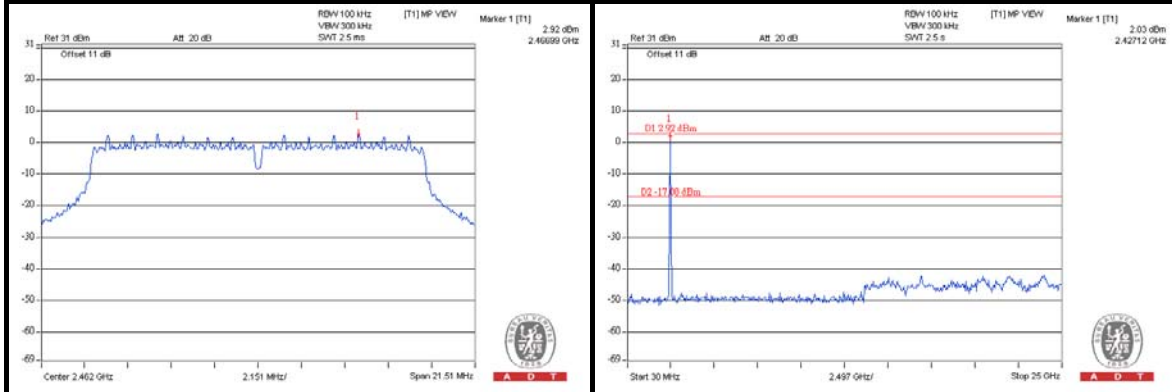
802.11g**CH 1****CH 6****CH 11**





A D T

802.11n (20MHz)



CH 1





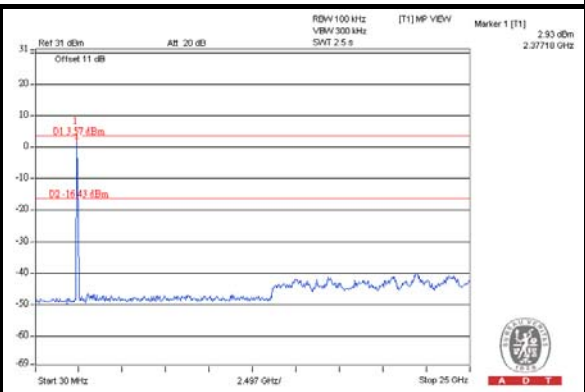
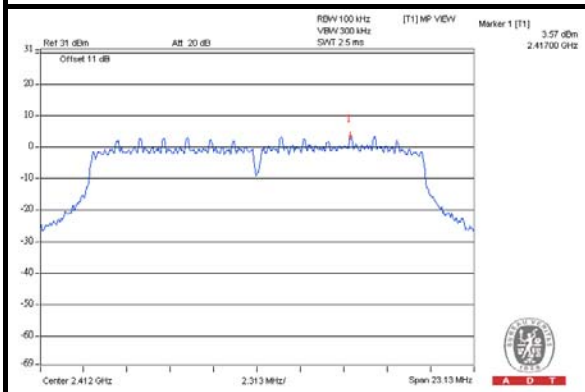


CH 6

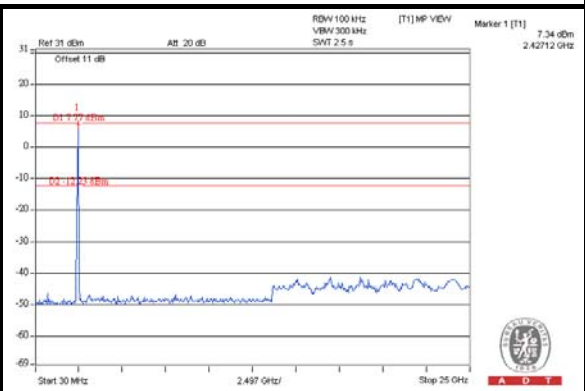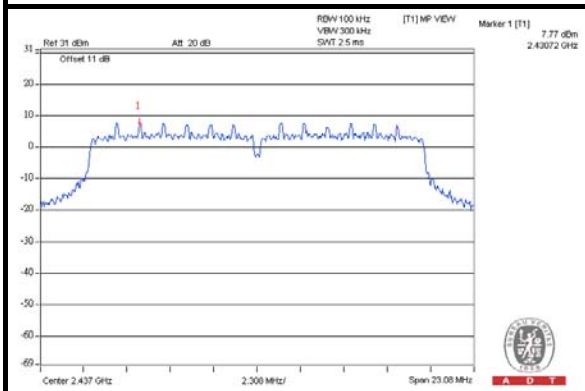

CH 11

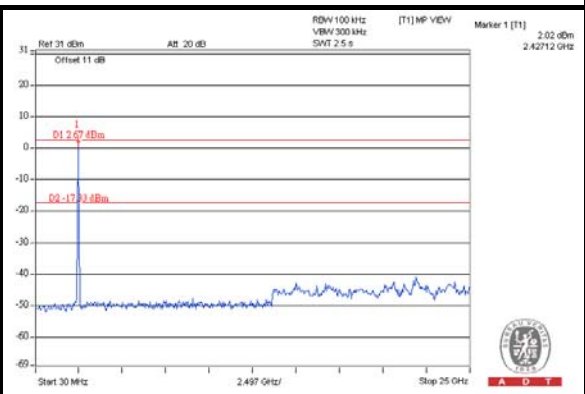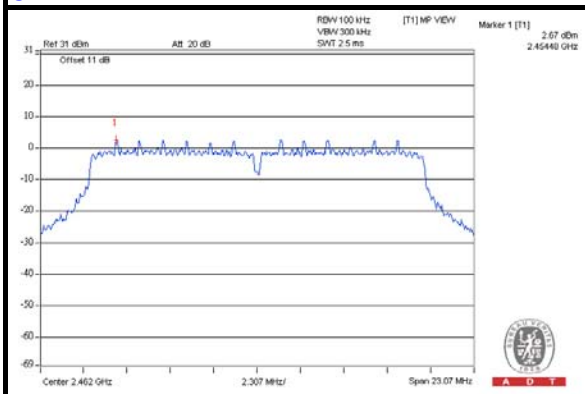

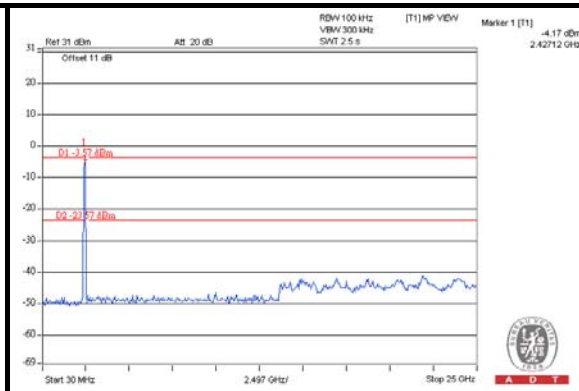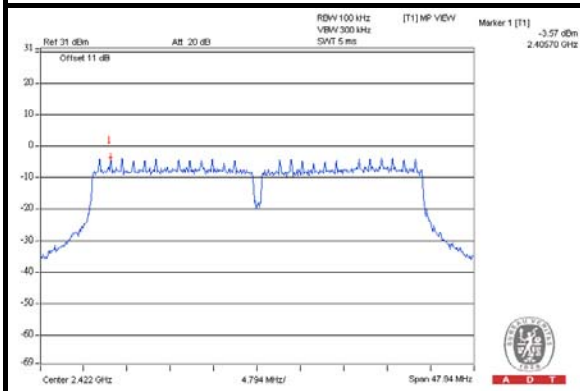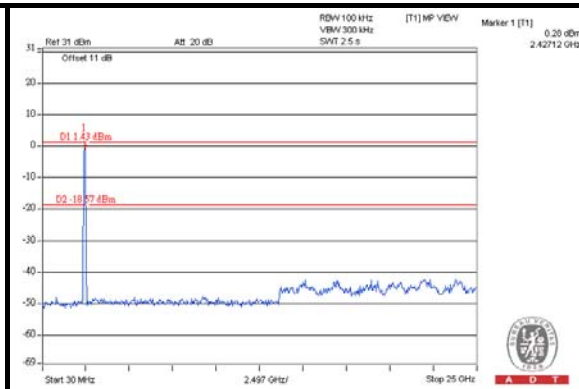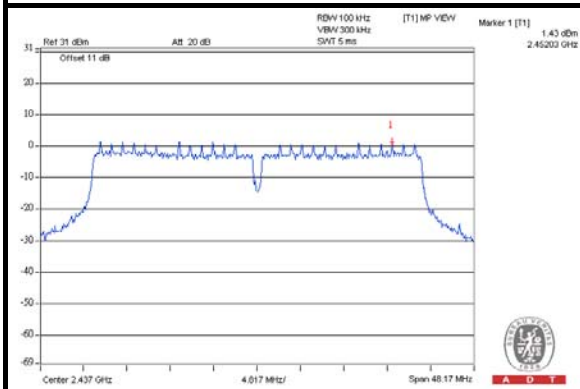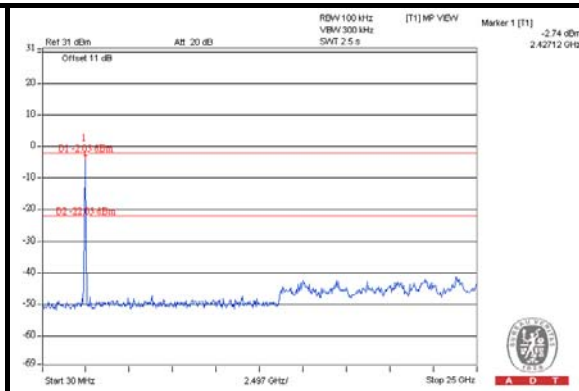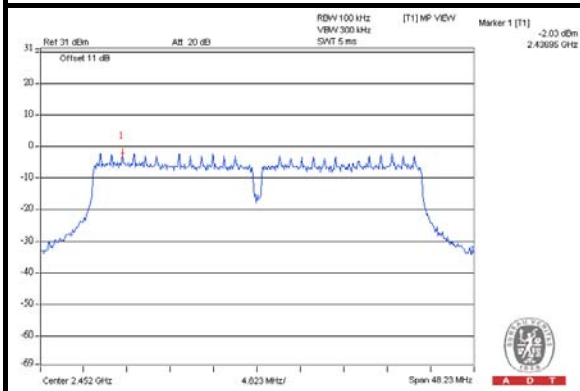802.11n (40MHz)**CH 3****CH 6****CH 9**



4.8 RECEIVER RADIATED EMISSION MEASUREMENT

4.8.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in RSS-Gen table 2 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in RSS-Gen 7.2.3, for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.8.2 TEST INSTRUMENTS

Same as 4.1.2

4.8.3 TEST PROCEDURES

Same as 4.1.3

4.8.4 DEVIATION FROM TEST STANDARD

No deviation.

4.8.5 TEST SETUP

Same as 4.1.5

4.8.6 EUT OPERATING CONDITIONS

Same as 4.1.6



A D T

4.8.7 TEST RESULTS

802.11b

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 12.5GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1125.00	38.5 PK	74.0	-35.5	1.26 H	14	10.60	27.90
2	1125.00	27.6 AV	54.0	-26.4	1.26 H	14	-0.30	27.90
3	1920.00	44.9 PK	74.0	-29.1	1.00 H	343	15.20	29.70
4	1920.00	41.3 AV	54.0	-12.7	1.00 H	343	11.60	29.70
5	3229.00	43.9 PK	74.0	-30.1	1.21 H	6	10.50	33.40
6	3229.00	31.8 AV	54.0	-22.2	1.21 H	6	-1.60	33.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1125.00	43.1 PK	74.0	-30.9	1.00 V	336	15.20	27.90
2	1125.00	34.2 AV	54.0	-19.8	1.00 V	336	6.30	27.90
3	1920.00	44.8 PK	74.0	-29.2	1.00 V	165	15.10	29.70
4	1920.00	41.0 AV	54.0	-13.0	1.00 V	165	11.30	29.70
5	3229.00	43.5 PK	74.0	-30.5	1.10 V	354	10.10	33.40
6	3229.00	31.3 AV	54.0	-22.7	1.10 V	354	-2.10	33.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 12.5GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1125.00	38.9 PK	74.0	-35.1	1.25 H	21	11.00	27.90
2	1125.00	27.4 AV	54.0	-26.6	1.25 H	21	-0.50	27.90
3	1920.00	45.3 PK	74.0	-28.7	1.00 H	338	15.60	29.70
4	1920.00	41.5 AV	54.0	-12.5	1.00 H	338	11.80	29.70
5	3229.00	43.8 PK	74.0	-30.2	1.20 H	14	10.40	33.40
6	3229.00	31.6 AV	54.0	-22.4	1.20 H	14	-1.80	33.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1125.00	43.3 PK	74.0	-30.7	1.00 V	308	15.40	27.90
2	1125.00	34.1 AV	54.0	-19.9	1.00 V	308	6.20	27.90
3	1920.00	45.6 PK	74.0	-28.4	1.00 V	172	15.90	29.70
4	1920.00	41.3 AV	54.0	-12.7	1.00 V	172	11.60	29.70
5	3229.00	43.8 PK	74.0	-30.2	1.08 V	346	10.40	33.40
6	3229.00	31.7 AV	54.0	-22.3	1.08 V	346	-1.70	33.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 12.5GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Haru Yang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1125.00	39.2 PK	74.0	-34.8	1.22 H	19	11.30	27.90
2	1125.00	27.5 AV	54.0	-26.5	1.22 H	19	-0.40	27.90
3	1920.00	45.8 PK	74.0	-28.2	1.00 H	327	16.10	29.70
4	1920.00	41.9 AV	54.0	-12.1	1.00 H	327	12.20	29.70
5	3229.00	44.5 PK	74.0	-29.5	1.20 H	8	11.10	33.40
6	3229.00	32.4 AV	54.0	-21.6	1.20 H	8	-1.00	33.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1125.00	43.7 PK	74.0	-30.3	1.00 V	311	15.80	27.90
2	1125.00	34.3 AV	54.0	-19.7	1.00 V	311	6.40	27.90
3	1920.00	45.4 PK	74.0	-28.6	1.00 V	177	15.70	29.70
4	1920.00	41.1 AV	54.0	-12.9	1.00 V	177	11.40	29.70
5	3229.00	44.2 PK	74.0	-29.8	1.12 V	351	10.80	33.40
6	3229.00	32.1 AV	54.0	-21.9	1.12 V	351	-1.30	33.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

BELOW 1GHz WORST-CASE DATA : 802.11g

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Aska Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	125.17	33.6 QP	43.5	-9.9	1.99 H	267	21.30	12.30
2	226.27	37.2 QP	46.0	-8.8	1.50 H	238	25.10	12.10
3	374.04	38.5 QP	46.0	-7.5	1.00 H	231	21.60	16.90
4	479.03	39.0 QP	46.0	-7.0	1.00 H	236	19.60	19.40
5	624.85	37.3 QP	46.0	-8.7	1.24 H	19	15.00	22.30
6	675.40	39.0 QP	46.0	-7.0	1.24 H	19	16.20	22.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	36.66	34.2 QP	40.0	-5.8	1.00 V	218	21.10	13.10
2	125.17	30.2 QP	43.5	-13.3	1.50 V	198	17.90	12.30
3	228.22	31.0 QP	46.0	-15.0	1.00 V	189	18.90	12.10
4	374.04	36.3 QP	46.0	-9.7	1.25 V	5	19.40	16.90
5	479.03	41.8 QP	46.0	-4.2	1.00 V	111	22.40	19.40
6	539.30	38.4 QP	46.0	-7.6	1.00 V	321	17.60	20.80
7	624.85	38.0 QP	46.0	-8.0	1.50 V	350	15.70	22.30

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

5. TEST TYPES AND RESULTS (FOR 5.0GHz BAND)

5.1 RADIATED EMISSION MEASUREMENT

5.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

5.1.2 TEST INSTRUMENTS

Same as item 4.1.2.

5.1.3 TEST PROCEDURES

Same as item 4.1.3.

5.1.4 DEVIATION FROM TEST STANDARD

No deviation.

5.1.5 TEST SETUP

Same as item 4.1.5.

5.1.6 EUT OPERATING CONDITIONS

Same as 4.1.6.



A D T

5.1.7 TEST RESULTS

802.11a

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 149	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	68.0 PK	86.0	-18.0	1.13 H	113	29.20	38.80
2	#5725.00	57.4 AV	75.4	-18.0	1.13 H	113	18.60	38.80
3	*5745.00	106.0 PK			1.02 H	116	67.20	38.80
4	*5745.00	95.4 AV			1.02 H	116	56.60	38.80
5	11490.00	59.6 PK	74.0	-14.4	1.17 H	158	9.50	50.10
6	11490.00	47.5 AV	54.0	-6.5	1.17 H	158	-2.60	50.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	74.4 PK	96.4	-22.0	1.00 V	87	35.60	38.80
2	#5725.00	63.9 AV	85.9	-22.0	1.00 V	87	25.10	38.80
3	*5745.00	116.4 PK			1.00 V	46	77.60	38.80
4	*5745.00	105.9 AV			1.00 V	46	67.10	38.80
5	11490.00	59.9 PK	74.0	-14.1	1.00 V	128	9.80	50.10
6	11490.00	47.1 AV	54.0	-6.9	1.00 V	128	-3.00	50.10

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 157	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	106.5 PK			1.00 H	114	67.60	38.90
2	*5785.00	95.9 AV			1.00 H	114	57.00	38.90
3	11570.00	60.4 PK	74.0	-13.6	1.07 H	185	10.40	50.00
4	11570.00	48.3 AV	54.0	-5.7	1.07 H	185	-1.70	50.00
5	#17355.00	65.9 PK	86.5	-20.6	1.10 H	147	12.80	53.10
6	#17355.00	52.8 AV	75.9	-23.1	1.10 H	147	-0.30	53.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	115.9 PK			1.00 V	51	77.00	38.90
2	*5785.00	106.6 AV			1.00 V	51	67.70	38.90
3	11570.00	60.9 PK	74.0	-13.1	1.10 V	157	10.90	50.00
4	11570.00	47.3 AV	54.0	-6.7	1.10 V	157	-2.70	50.00
5	#17355.00	66.0 PK	95.9	-29.9	1.07 V	143	12.90	53.10
6	#17355.00	52.7 AV	86.6	-33.9	1.07 V	143	-0.40	53.10

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. “#”:The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 165	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	106.1 PK			1.02 H	116	67.20	38.90
2	*5825.00	96.1 AV			1.02 H	116	57.20	38.90
3	#5850.00	61.1 PK	86.1	-25.0	1.00 H	109	22.10	39.00
4	#5850.00	51.1 AV	76.1	-25.0	1.00 H	109	12.10	39.00
5	11650.00	61.0 PK	74.0	-13.0	1.04 H	137	11.00	50.00
6	11650.00	48.1 AV	54.0	-5.9	1.04 H	137	-1.90	50.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	115.9 PK			1.15 V	111	77.00	38.90
2	*5825.00	105.7 AV			1.15 V	111	66.80	38.90
3	#5850.00	65.9 PK	95.9	-30.0	1.10 V	360	26.90	39.00
4	#5850.00	55.7 AV	85.7	-30.0	1.10 V	360	16.70	39.00
5	11650.00	61.5 PK	74.0	-12.5	1.00 V	245	11.50	50.00
6	11650.00	49.2 AV	54.0	-4.8	1.00 V	245	-0.80	50.00

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. “#”:The radiated frequency is out the restricted band.



A D T

802.11n (20MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 149	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	70.3 PK	86.3	-16.0	1.00 H	305	31.50	38.80
2	#5725.00	59.6 AV	75.6	-16.0	1.00 H	305	20.80	38.80
3	*5745.00	106.3 PK			1.04 H	116	67.50	38.80
4	*5745.00	95.6 AV			1.04 H	116	56.80	38.80
5	11490.00	60.5 PK	74.0	-13.5	1.17 H	124	10.40	50.10
6	11490.00	47.2 AV	54.0	-6.8	1.17 H	124	-2.90	50.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	78.6 PK	97.1	-18.5	1.00 V	111	39.80	38.80
2	#5725.00	67.9 AV	86.4	-18.5	1.00 V	111	29.10	38.80
3	*5745.00	117.1 PK			1.43 V	82	78.30	38.80
4	*5745.00	106.4 AV			1.43 V	82	67.60	38.80
5	11490.00	60.5 PK	74.0	-13.5	1.00 V	111	10.40	50.10
6	11490.00	47.3 AV	54.0	-6.7	1.00 V	111	-2.80	50.10

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. “#“: The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 157	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	105.8 PK			1.00 H	113	66.90	38.90
2	*5785.00	95.6 AV			1.00 H	113	56.70	38.90
3	11570.00	60.2 PK	74.0	-13.8	1.11 H	135	10.20	50.00
4	11570.00	47.1 AV	54.0	-6.9	1.11 H	135	-2.90	50.00
5	#17355.00	66.2 PK	85.8	-19.6	1.12 H	145	13.10	53.10
6	#17355.00	52.8 AV	75.6	-22.8	1.12 H	145	-0.30	53.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	116.0 PK			1.00 V	54	77.10	38.90
2	*5785.00	106.7 AV			1.00 V	54	67.80	38.90
3	11570.00	61.3 PK	74.0	-12.7	1.17 V	158	11.30	50.00
4	11570.00	47.5 AV	54.0	-6.5	1.17 V	158	-2.50	50.00
5	#17355.00	65.9 PK	96.0	-30.1	1.24 V	157	12.80	53.10
6	#17355.00	52.6 AV	86.7	-34.1	1.24 V	157	-0.50	53.10

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. “#”:The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 165	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	105.0 PK			1.00 H	112	66.10	38.90
2	*5825.00	95.2 AV			1.00 H	112	56.30	38.90
3	#5850.00	61.0 PK	85.0	-24.0	1.00 H	119	22.00	39.00
4	#5850.00	51.2 AV	75.2	-24.0	1.00 H	119	12.20	39.00
5	11650.00	59.6 PK	74.0	-14.4	1.24 H	147	9.60	50.00
6	11650.00	47.5 AV	54.0	-6.5	1.24 H	147	-2.50	50.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	116.5 PK			1.20 V	360	77.60	38.90
2	*5825.00	106.9 AV			1.20 V	360	68.00	38.90
3	#5850.00	70.5 PK	96.5	-26.0	1.00 V	108	31.50	39.00
4	#5850.00	60.9 AV	86.9	-26.0	1.00 V	108	21.90	39.00
5	11650.00	59.9 PK	74.0	-14.1	1.17 V	158	9.90	50.00
6	11650.00	47.5 AV	54.0	-6.5	1.17 V	158	-2.50	50.00

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. “#”:The radiated frequency is out the restricted band.



A D T

802.11n (40MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 151	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	70.8 PK	82.8	-12.0	1.00 H	181	32.00	38.80
2	#5725.00	60.3 AV	72.3	-12.0	1.00 H	181	21.50	38.80
3	*5755.00	102.8 PK			1.03 H	116	64.00	38.80
4	*5755.00	92.3 AV			1.03 H	116	53.50	38.80
5	11510.00	59.9 PK	74.0	-14.1	1.24 H	92	9.80	50.10
6	11510.00	47.4 AV	54.0	-6.6	1.24 H	92	-2.70	50.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	78.8 PK	92.8	-14.0	1.48 V	112	40.00	38.80
2	#5725.00	68.8 AV	82.8	-14.0	1.48 V	112	30.00	38.80
3	*5755.00	112.8 PK			1.02 V	117	74.00	38.80
4	*5755.00	102.8 AV			1.02 V	117	64.00	38.80
5	11510.00	60.9 PK	74.0	-13.1	1.48 V	112	10.80	50.10
6	11510.00	47.5 AV	54.0	-6.5	1.48 V	112	-2.60	50.10

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 159	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	102.3 PK			1.00 H	113	63.40	38.90
2	*5795.00	92.4 AV			1.00 H	113	53.50	38.90
3	#5850.00	69.3 PK	82.3	-13.0	1.17 H	226	30.30	39.00
4	#5850.00	59.4 AV	72.4	-13.0	1.17 H	226	20.40	39.00
5	11590.00	61.1 PK	74.0	-12.9	1.14 H	153	11.10	50.00
6	11590.00	47.0 AV	54.0	-7.0	1.14 H	153	-3.00	50.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	111.9 PK			1.00 V	81	73.00	38.90
2	*5795.00	102.6 AV			1.00 V	81	63.70	38.90
3	#5850.00	63.9 PK	91.9	-28.0	1.19 V	360	24.90	39.00
4	#5850.00	54.6 AV	82.6	-28.0	1.19 V	360	15.60	39.00
5	11590.00	59.0 PK	74.0	-15.0	1.47 V	128	9.00	50.00
6	11590.00	47.9 AV	54.0	-6.1	1.47 V	128	-2.10	50.00

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

BELOW 1GHz WORST-CASE DATA : 802.11a

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 149	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Aska Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	125.17	33.1 QP	43.5	-10.4	1.49 H	286	20.80	12.30
2	228.22	35.7 QP	46.0	-10.3	1.49 H	167	23.60	12.10
3	360.43	42.4 QP	46.0	-3.6	1.00 H	17	25.90	16.50
4	500.42	37.0 QP	46.0	-9.0	1.00 H	278	17.00	20.00
5	599.58	39.0 QP	46.0	-7.0	1.24 H	136	16.90	22.10
6	675.40	39.1 QP	46.0	-6.9	1.24 H	15	16.30	22.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	35.73	36.5 QP	40.0	-3.5	1.00 V	145	23.50	13.00
2	70.73	35.1 QP	40.0	-4.9	1.00 V	253	23.00	12.10
3	360.43	43.7 QP	46.0	-2.3	1.25 V	245	27.20	16.50
4	500.42	38.2 QP	46.0	-7.8	1.00 V	328	18.20	20.00
5	624.85	37.6 QP	46.0	-8.4	1.00 V	7	15.30	22.30
6	840.67	42.8 QP	46.0	-3.2	1.00 V	41	16.70	26.10

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

5.2 CONDUCTED EMISSION MEASUREMENT

5.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:** 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

5.2.2 TEST INSTRUMENTS

Same as item 4.2.2.

5.2.3 TEST PROCEDURES

Same as item 4.2.3.

5.2.4 DEVIATION FROM TEST STANDARD

No deviation.

5.2.5 TEST SETUP

Same as item 4.2.5.

5.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

5.2.7 TEST RESULTS


CONDUCTED WORST-CASE DATA : 802.11a

PHASE	Line 1	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	0.17	43.91	32.36	44.08	32.53	66.00	56.00	-21.92	-23.47
2	0.20859	0.17	39.53	31.14	39.70	31.31	63.26	53.26	-23.56	-21.95
3	0.52891	0.21	48.45	38.67	48.66	38.88	56.00	46.00	-7.34	-7.12
4	0.84531	0.22	39.63	27.76	39.85	27.98	56.00	46.00	-16.15	-18.02
5	6.56250	0.43	34.97	27.05	35.40	27.48	60.00	50.00	-24.60	-22.52
6	18.15234	0.68	32.65	26.66	33.33	27.34	60.00	50.00	-26.67	-22.66

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

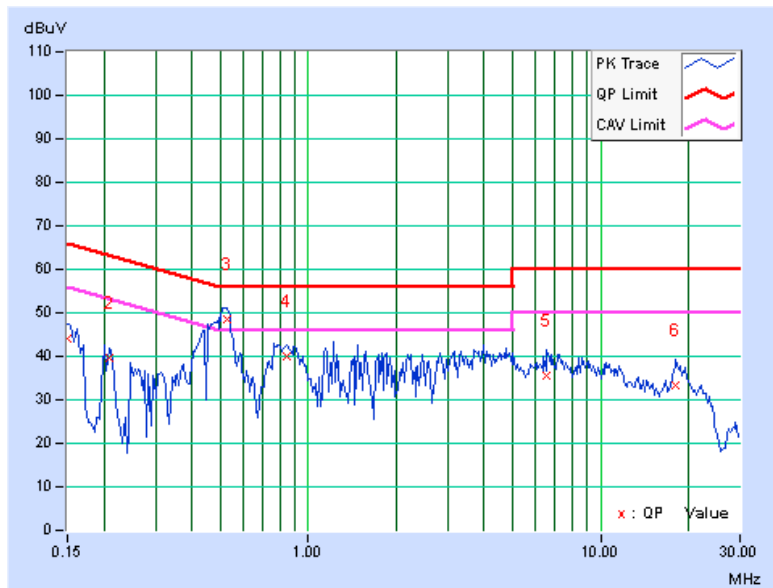


PHASE	Line 2	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	0.17	43.27	29.15	43.44	29.32	65.38	55.38	-21.94	-26.06
2	0.21250	0.15	39.27	26.52	39.42	26.67	63.11	53.11	-23.69	-26.44
3	0.52500	0.18	44.03	34.49	44.21	34.67	56.00	46.00	-11.79	-11.33
4	0.84922	0.19	33.27	20.76	33.46	20.95	56.00	46.00	-22.54	-25.05
5	6.75391	0.47	31.58	24.35	32.05	24.82	60.00	50.00	-27.95	-25.18
6	18.11719	0.77	32.27	26.23	33.04	27.00	60.00	50.00	-26.96	-23.00

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

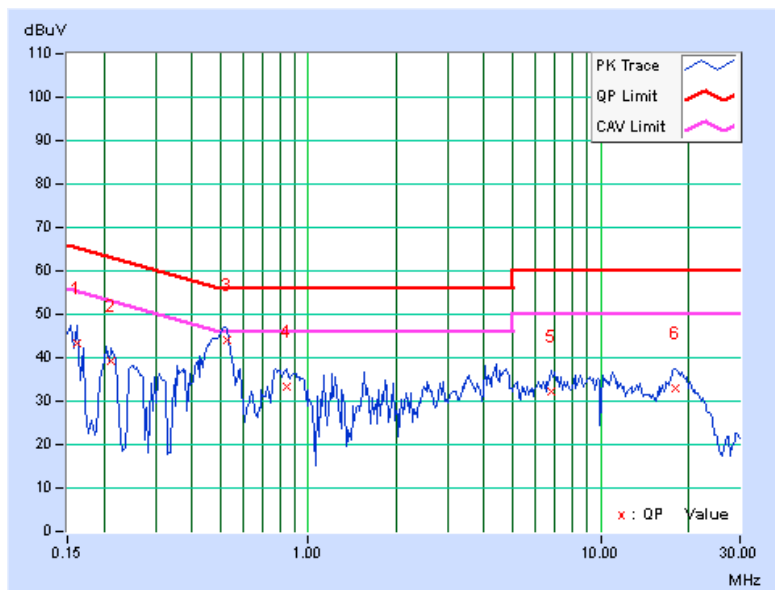



A D T

5.3 6dB BANDWIDTH MEASUREMENT

5.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

5.3.2 TEST SETUP

Same as item 4.3.2.

5.3.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

5.3.4 TEST PROCEDURE

Same as item 4.3.4.

5.3.5 DEVIATION FROM TEST STANDARD

No deviation.

5.3.6 EUT OPERATING CONDITIONS

Same as item 4.3.6.



5.3.7 TEST RESULTS

802.11a

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
149	5745	16.52	16.51	0.5	PASS
157	5785	16.51	16.54	0.5	PASS
165	5825	16.51	16.53	0.5	PASS

802.11n (20MHz)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
149	5745	17.56	17.79	0.5	PASS
157	5785	17.65	17.75	0.5	PASS
165	5825	17.62	17.71	0.5	PASS

802.11n (40MHz)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
151	5755	36.54	36.58	0.5	PASS
159	5795	36.35	36.49	0.5	PASS



A D T

5.4 OCCUPIED BANDWIDTH MEASUREMENT

5.4.1 TEST SETUP

Same as Item 4.4.2

5.4.2 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

5.4.3 TEST PROCEDURE

Same as Item 4.4.2

5.4.4 DEVIATION FROM TEST STANDARD

No deviation.

5.4.5 EUT OPERATING CONDITIONS

Same as Item 4.3.6



5.4.6 TEST RESULTS

802.11a

CHANNEL	FREQUENCY (MHz)	OCCUPIED BANDWIDTH (MHz)		PASS / FAIL
		CHAIN 0	CHAIN 1	
149	5745	17.16	16.92	PASS
157	5785	17.16	17.04	PASS
165	5825	17.16	16.92	PASS

802.11n (20MHz)

CHANNEL	FREQUENCY (MHz)	OCCUPIED BANDWIDTH (MHz)		PASS / FAIL
		CHAIN 0	CHAIN 1	
149	5745	18.12	18.06	PASS
157	5785	18.18	18.06	PASS
165	5825	18.18	18.06	PASS

802.11n (40MHz)

CHANNEL	FREQUENCY (MHz)	OCCUPIED BANDWIDTH (MHz)		PASS / FAIL
		CHAIN 0	CHAIN 1	
151	5755	38.24	37.92	PASS
159	5795	38.24	37.76	PASS



A D T

5.5 CONDUCTED OUTPUT POWER

5.5.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 5725 –5850 MHz bands: 1 Watt (30dBm)

5.5.2 TEST SETUP

Same as Item 4.4.2.

5.5.3 INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

5.5.4 TEST PROCEDURES

Same as Item 4.4.4.

5.5.5 DEVIATION FROM TEST STANDARD

No deviation.

5.5.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.



5.5.7 TEST RESULTS

802.11a

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
149	5745	23.60	23.53	454.51	26.58	30	PASS
157	5785	23.01	23.01	399.97	26.02	30	PASS
165	5825	23.29	23.29	426.61	26.30	30	PASS

NOTE: Directional gain = 3dBi + 10log(2) = 6dBi, therefore the limit no need to reduced.

802.11n (20MHz)

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
149	5745	23.18	23.33	423.25	26.27	30	PASS
157	5785	23.14	23.21	415.47	26.19	30	PASS
165	5825	22.93	22.97	394.49	25.96	30	PASS

NOTE: Directional gain = 3dBi + 10log(2) = 6dBi, therefore the limit no need to reduced.

802.11n (40MHz)

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
151	5755	23.30	23.50	437.67	26.41	30	PASS
159	5795	23.21	23.21	418.82	26.22	30	PASS

NOTE: Directional gain = 3dBi + 10log(2) = 6dBi, therefore the limit no need to reduced.



A D T

5.6 POWER SPECTRAL DENSITY MEASUREMENT

5.6.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

5.6.2 TEST SETUP

Same as item 4.5.2.

5.6.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

5.6.4 TEST PROCEDURE.

Same as item 4.5.4.

5.6.5 DEVIATION FROM TEST STANDARD

No deviation.

5.6.6 EUT OPERATING CONDITION

Same as item 4.3.6.



5.6.7 TEST RESULTS

802.11a

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	149	5745	5.94	-9.29	3.01	-6.28	8	PASS
	157	5785	5.51	-9.72	3.01	-6.71	8	PASS
	165	5825	5.27	-9.96	3.01	-6.95	8	PASS
1	149	5745	5.86	-9.37	3.01	-6.36	8	PASS
	157	5785	6.10	-9.13	3.01	-6.12	8	PASS
	165	5825	5.43	-9.80	3.01	-6.79	8	PASS

NOTE: Directional gain = 3dBi + 10log(2) = 6dBi, therefore the limit no need to reduced.

802.11n (20MHz)

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	149	5745	5.25	-9.98	3.01	-6.97	8	PASS
	157	5785	5.35	-9.88	3.01	-6.87	8	PASS
	165	5825	5.16	-10.07	3.01	-7.06	8	PASS
1	149	5745	5.05	-10.18	3.01	-7.17	8	PASS
	157	5785	4.92	-10.31	3.01	-7.30	8	PASS
	165	5825	4.81	-10.42	3.01	-7.41	8	PASS

NOTE: Directional gain = 3dBi + 10log(2) = 6dBi, therefore the limit no need to reduced.

802.11n (40MHz)

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	151	5755	2.70	-12.53	3.01	-9.52	8	PASS
	159	5795	2.66	-12.57	3.01	-9.56	8	PASS
1	151	5755	2.56	-12.67	3.01	-9.66	8	PASS
	159	5795	2.20	-13.03	3.01	-10.02	8	PASS

NOTE: Directional gain = 3dBi + 10log(2) = 6dBi, therefore the limit no need to reduced.



A D T

5.7 CONDUCTED OUT OF BAND EMISSION MEASUREMENT

5.7.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

5.7.2 TEST SETUP

Same as Item 4.6.2

5.7.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

5.7.4 TEST PROCEDURE

Same as Item 4.6.4

5.7.5 DEVIATION FROM TEST STANDARD

No deviation.




5.7.6 EUT OPERATING CONDITION




Same as Item 4.3.6

5.7.7 TEST RESULTS

The conducted emission test is performed on each TX port of operating mode without summing or adding $10\log(N)$ since the limit is relative emission limit. Only worst data of each operating mode is presented.


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

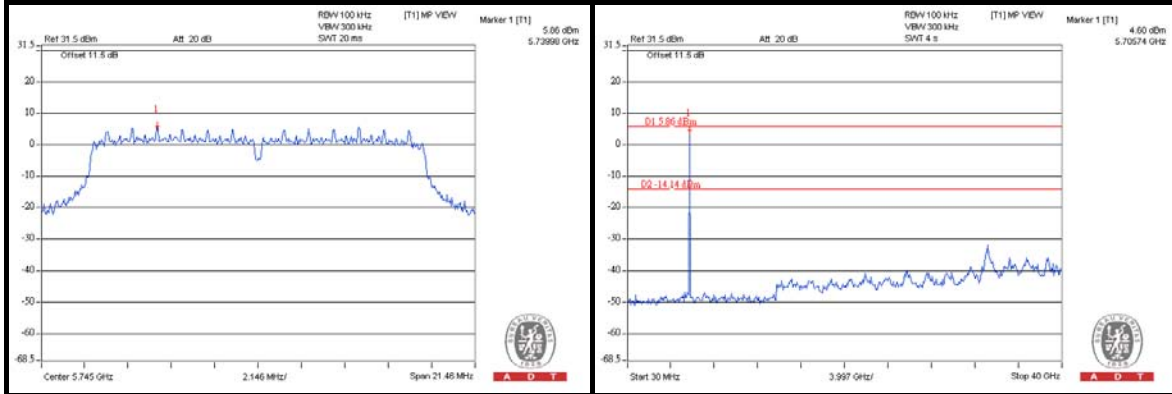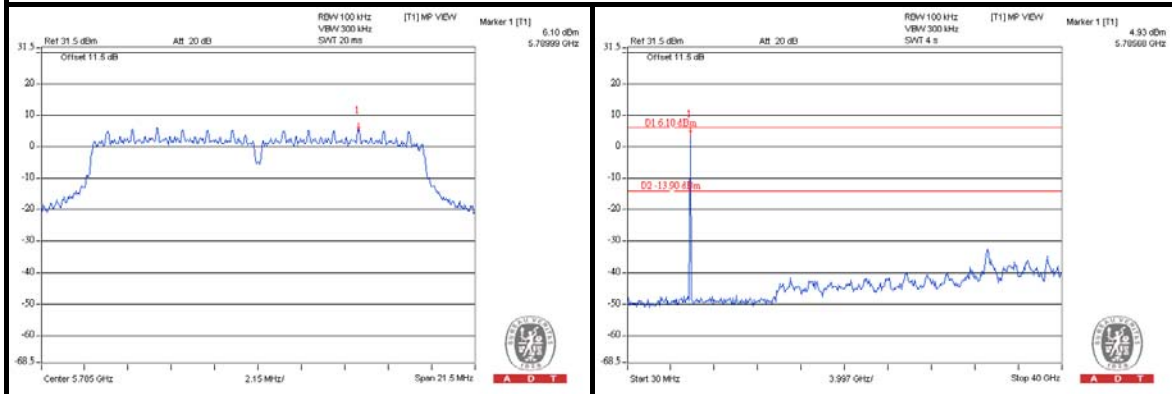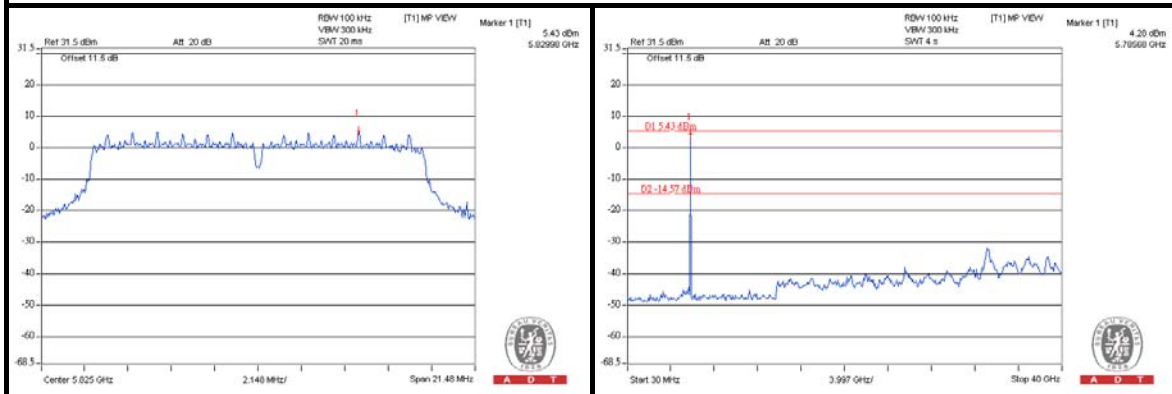802.11a**CH 149****CH 157****CH 165**

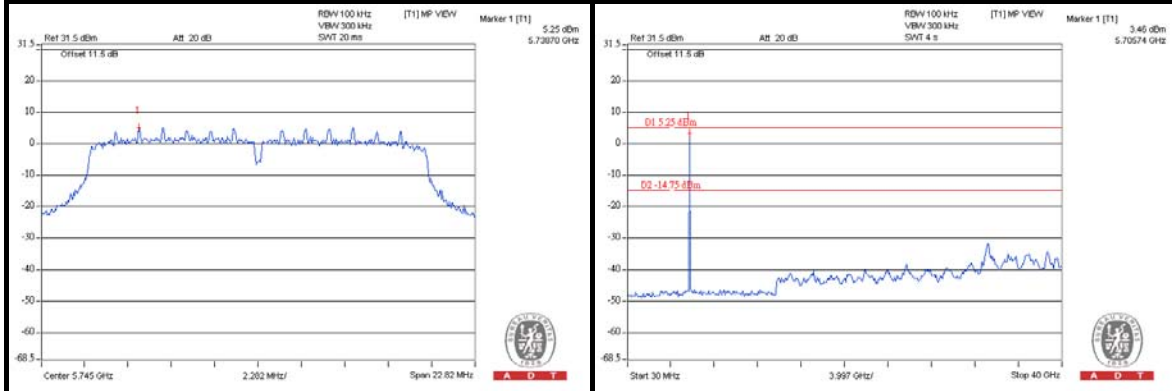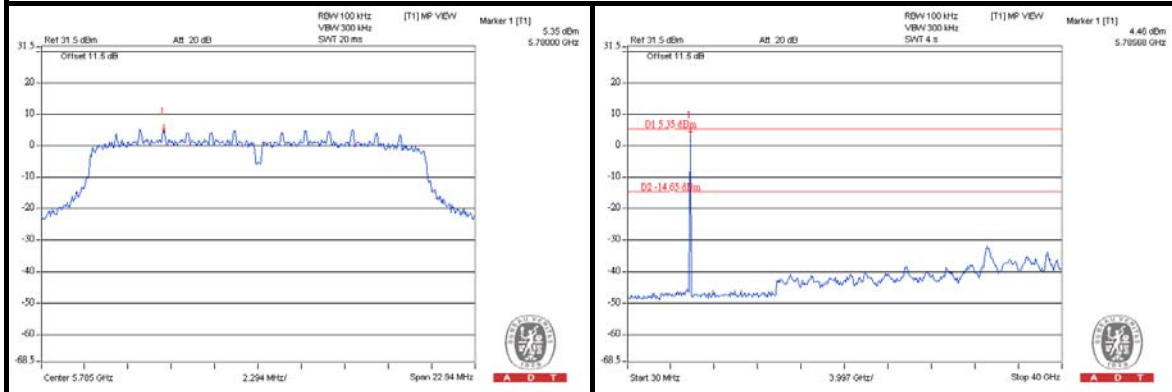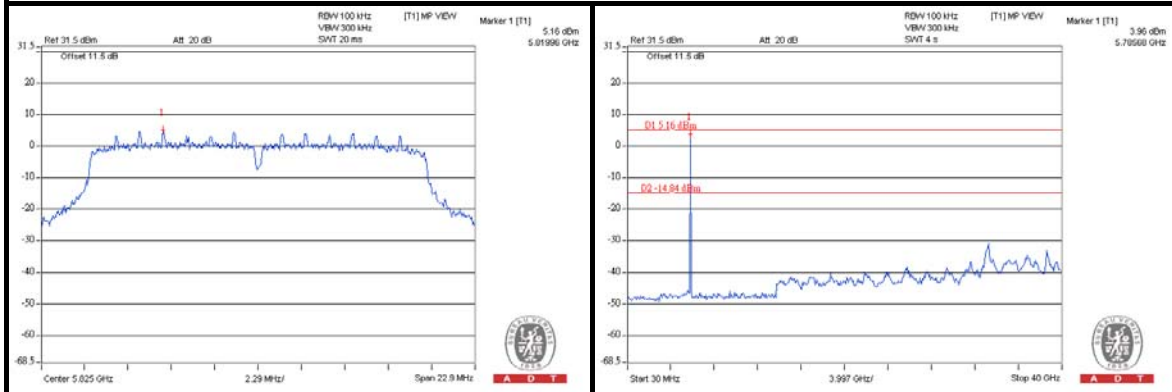
802.11n (20MHz)**CH 149****CH 157****CH 165**

802.11n (40MHz)

CH 151

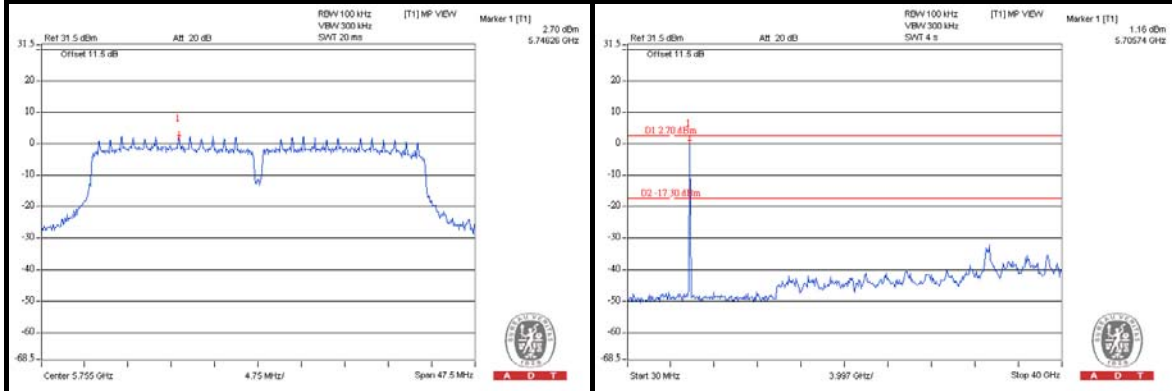

CH 159

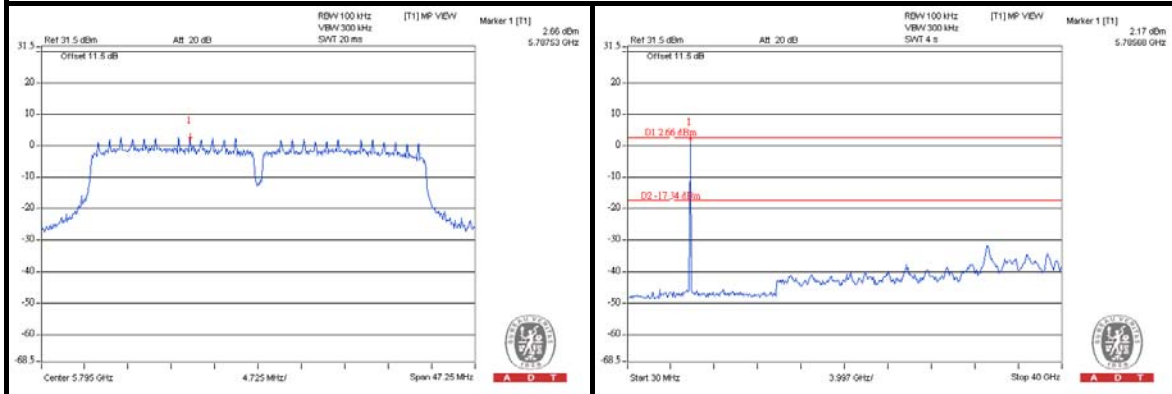

5.8 RECEIVER RADIATED EMISSION MEASUREMENT

5.8.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in RSS-Gen table 2 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in RSS-Gen 7.2.3, for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

5.8.2 TEST INSTRUMENTS

Same as 4.1.2

5.8.3 TEST PROCEDURES

Same as 4.1.3

5.8.4 DEVIATION FROM TEST STANDARD

No deviation.

5.8.5 TEST SETUP

Same as 4.1.5

5.8.6 EUT OPERATING CONDITIONS

Same as 4.1.6



A D T

5.8.7 TEST RESULTS

802.11a

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 149	FREQUENCY RANGE	1 ~ 30GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1920.00	45.7 PK	74.0	-28.3	1.11 H	128	16.00	29.70
2	1920.00	41.5 AV	54.0	-12.5	1.11 H	128	11.80	29.70
3	3260.00	46.2 PK	74.0	-27.8	1.02 H	143	12.80	33.40
4	3260.00	32.3 AV	54.0	-21.7	1.02 H	143	-1.10	33.40
5	4580.00	46.9 PK	74.0	-27.1	1.23 H	178	10.30	36.60
6	4580.00	33.4 AV	54.0	-20.6	1.23 H	178	-3.20	36.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1920.00	49.3 PK	74.0	-24.7	1.01 V	178	19.60	29.70
2	1920.00	45.5 AV	54.0	-8.5	1.01 V	178	15.80	29.70
3	3260.00	45.2 PK	74.0	-28.8	1.14 V	253	11.80	33.40
4	3260.00	32.0 AV	54.0	-22.0	1.14 V	253	-1.40	33.40
5	4580.00	47.0 PK	74.0	-27.0	1.10 V	148	10.40	36.60
6	4580.00	33.4 AV	54.0	-20.6	1.10 V	148	-3.20	36.60

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 157	FREQUENCY RANGE	1 ~ 30GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1920.00	46.2 PK	74.0	-27.8	1.07 H	159	16.50	29.70
2	1920.00	41.6 AV	54.0	-12.4	1.07 H	159	11.90	29.70
3	3260.00	45.7 PK	74.0	-28.3	1.03 H	147	12.30	33.40
4	3260.00	32.3 AV	54.0	-21.7	1.03 H	147	-1.10	33.40
5	4580.00	47.2 PK	74.0	-26.8	1.10 H	360	10.60	36.60
6	4580.00	33.3 AV	54.0	-20.7	1.10 H	360	-3.30	36.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1920.00	48.4 PK	74.0	-25.6	1.01 V	177	18.70	29.70
2	1920.00	45.4 AV	54.0	-8.6	1.01 V	177	15.70	29.70
3	3260.00	46.1 PK	74.0	-27.9	1.07 V	254	12.70	33.40
4	3260.00	32.2 AV	54.0	-21.8	1.07 V	254	-1.20	33.40
5	4580.00	44.9 PK	74.0	-29.1	1.06 V	258	8.30	36.60
6	4580.00	33.4 AV	54.0	-20.6	1.06 V	258	-3.20	36.60

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 165	FREQUENCY RANGE	1 ~ 30GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1920.00	46.5 PK	74.0	-27.5	1.00 H	147	16.80	29.70
2	1920.00	41.3 AV	54.0	-12.7	1.00 H	147	11.60	29.70
3	3260.00	45.9 PK	74.0	-28.1	1.24 H	154	12.50	33.40
4	3260.00	31.9 AV	54.0	-22.1	1.24 H	154	-1.50	33.40
5	4580.00	47.7 PK	74.0	-26.3	1.07 H	155	11.10	36.60
6	4580.00	33.4 AV	54.0	-20.6	1.07 H	155	-3.20	36.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1920.00	48.7 PK	74.0	-25.3	1.01 V	178	19.00	29.70
2	1920.00	45.5 AV	54.0	-8.5	1.01 V	178	15.80	29.70
3	3260.00	45.5 PK	74.0	-28.5	1.09 V	125	12.10	33.40
4	3260.00	32.3 AV	54.0	-21.7	1.09 V	125	-1.10	33.40
5	4580.00	46.8 PK	74.0	-27.2	1.06 V	124	10.20	36.60
6	4580.00	33.3 AV	54.0	-20.7	1.06 V	124	-3.30	36.60

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

BELOW 1GHz WORST-CASE DATA : 802.11a

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 149	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Aska Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	125.17	33.2 QP	43.5	-10.3	1.50 H	269	20.90	12.30
2	230.16	35.9 QP	46.0	-10.1	1.50 H	158	23.70	12.20
3	360.43	42.2 QP	46.0	-3.8	1.24 H	155	25.70	16.50
4	500.42	37.1 QP	46.0	-8.9	1.00 H	288	17.10	20.00
5	675.40	40.3 QP	46.0	-5.7	1.24 H	347	17.50	22.80
6	840.67	39.7 QP	46.0	-6.3	1.50 H	219	13.60	26.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	35.73	37.0 QP	40.0	-3.0	1.25 V	239	24.00	13.00
2	70.73	34.9 QP	40.0	-5.1	1.00 V	20	22.80	12.10
3	230.16	32.8 QP	46.0	-13.2	1.00 V	168	20.60	12.20
4	360.43	43.4 QP	46.0	-2.6	1.25 V	260	26.90	16.50
5	599.58	38.8 QP	46.0	-7.2	1.00 V	310	16.70	22.10
6	840.67	43.6 QP	46.0	-2.4	1.00 V	49	17.50	26.10

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

6. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



A D T

7. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



A D T

8. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

---END---