

APPLICATION FOR CERTIFICATION
On Behalf of

TP-LINK Technologies Co., Ltd.

54M Wireless USB Adapter

Model Number: TL-WN323G

FCC ID: TE7WN323G

Prepared for : TP-LINK Technologies Co., Ltd.
Building 7, Second Part, Honghualing Industrial Zone,
Xili town, Nanshan District, Shenzhen, China

Prepared By : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Ke Feng Rd., 52 Block,
Shenzhen Science & Industrial Park,
Nantou, Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F08307
Date of Test : Jun.16~20, 2008
Date of Report : Jun.26, 2008

TABLE OF CONTENTS

Description	Page
1. SUMMARY OF STANDARDS AND RESULTS.....	1-1
1.1. Description of Standards and Results	1-1
2. GENERAL INFORMATION	2-1
2.1. Description of Device (EUT)	2-1
2.2. Data rate VS power	2-2
2.3. Tested Supporting System Details	2-2
2.4. Test Facility	2-3
2.5. Measurement Uncertainty	2-3
3. POWER LINE CONDUCTED EMISSION TEST	3-1
3.1. Test Equipments.....	3-1
3.2. Block Diagram of Test Setup.....	3-1
3.3. Power Line Conducted Emission Test Limits.....	3-1
3.4. Configuration of EUT on Test	3-1
3.5. Operating Condition of EUT.....	3-2
3.6. Test Procedure.....	3-2
3.7. Power Line Conducted Emission Test Results	3-2
4. RADIATED EMISSION TEST	4-1
4.1. Test Equipment	4-1
4.2. Block Diagram of Test Setup.....	4-1
4.3. Radiated Emission Limit.....	4-2
4.4. EUT Configuration on Test.....	4-2
4.5. Operating Condition of EUT.....	4-3
4.6. Test Procedure.....	4-3
4.7. Radiated Emission Test Results	4-3
5. 6dB Bandwidth Test.....	5-1
5.1. Test Equipment	5-1
5.2. Test Information.....	5-1
5.3. Test Procedure.....	5-1
5.4. Test Results	5-1
6. OUTPUT POWER TEST.....	6-1
6.1. Test Equipment	6-1
6.2. Test Procedure.....	6-1
6.3. Test Results	6-1
7. BAND EDGE COMPLIANCE TEST	7-1
7.1. Test Equipment	7-1
7.2. Limit.....	7-1
7.3. Test Produce	7-1
7.4. Test Results	7-1
8. POWER SPECTRAL DENSITY TEST	8-1
8.1. Test Equipment	8-1
8.2. Test Procedure.....	8-1
8.3. Test Results	8-1
9. ANTENNA REQUIREMENT	9-1
10. DEVIATION TO TEST SPECIFICATIONS.....	10-1
11. PHOTOGRAPH.....	11-1

11.1. Photos of Power Line Conducted Emission Test..... 11-1
11.2. Photos of Radiated Emission Test..... 11-2

TEST REPORT CERTIFICATION

Applicant : TP-LINK Technologies Co., Ltd.
 Manufacturer : TP-LINK Technologies Co., Ltd.
 EUT Description : 54M Wireless USB Adapter
 FCC ID : TE7WN323G
 (A) MODEL NO. : TL-WN323G
 (B) SERIAL NO. : N/A
 (C) POWER SUPPLY : DC 5V From USB
 (D) TEST VOLTAGE : DC 5V From PC AC 120V/60Hz

Test Procedure Used:

FCC Rules and Regulations Part 15 Subpart C 2007

The device described above is tested by AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both radiated and conducted emissions.

The test results are contained in this test report and AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. is assumed full responsibility for the accuracy and completeness of these tests. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Date of Test : Jun.16~20, 2008

Prepared by : YoYo Wang
YoYo Wang / Assistant

Reviewer : Jamy Yu
Jamy Yu / Senior Engineer

Approved & Authorized Signer : Ken Lu
Ken Lu / Deputy Manager



1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Conducted Emission Test	FCC Part 15: 15.207 ANSI C63.4: 2003 KDB58074	PASS
Radiated Emission Test	FCC Part 15: 15.209 ANSI C63.4: 2003 KDB58074	PASS
6dB Bandwidth Test	FCC Part 15: 15.247 KDB58074	PASS
Output Power Test	FCC Part 15: 15.247 KDB58074	PASS
Band Edge Compliance Test	FCC Part 15: 15.247 KDB58074	PASS
Power Spectral Density Test	FCC Part 15: 15.247 KDB58074	PASS
Antenna requirement	FCC Part 15: 15.203	PASS

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Product name	:	54M Wireless USB Adapter
Model Number	:	TL-WN323G
FCC ID	:	TE7WN323G
Operation frequency	:	IEEE 802.11b/g: 2412MHz - - - 2462MHz
Channel Number	:	IEEE 802.11b/g: 11 Channels
Modulation Technology	:	DSSS for IEEE 802.11b and OFDM for IEEE 802.11g
Data Rate	:	IEEE 802.11b: 11/5.5/2/1Mbps. IEEE 802.11g: 54/48/36/24/18/12/9/6Mbps.
Output power	:	21.92dBm(Maximum PK measured)
Antenna Assembly Gain	:	2dBi (maximum)
Applicant	:	TP-LINK Technologies Co., Ltd. Building 7, Second Part, Honghualing Industrial Zone, Xili town, Nanshan District, Shenzhen, China
Manufacturer	:	TP-LINK Technologies Co., Ltd. Building 7, Second Part, Honghualing Industrial Zone, Xili town, Nanshan District, Shenzhen, China
Date of Test	:	Jun.16~20, 2008
Date of Receipt	:	Jun.13, 2008
Sample Type	:	Prototype production

2.2.Date rate VS power

Mode	Data rate(Mbps)	CH	Level (dBm)	Limit (dBm)
11b	1	CH6	18.73	30
	2	CH6	18.40	30
	5.5	CH6	18.32	30
	11	CH6	18.39	30
11g	6	CH6	21.92	30
	9	CH6	20.32	30
	12	CH6	19.88	30
	18	CH6	20.43	30
	24	CH6	20.34	30
	36	CH6	20.01	30
	48	CH6	20.15	30
	54	CH6	20.35	30
When IEEE 802.11b's data rate was 1Mbps; IEEE 802.11g's data rate was 6Mbps the EUT have maximum output power and all the test was performed in this data rate set.				

2.3.Tested Supporting System Details

2.3.1.NOTEBOOK

M/N : PP09S
 S/N : N/A
 Manufacturer : DELL
 Power Adaptor : Manufacturer: DELL,
 M/N: LA65NS1-00
 Cable: Unshielded, Detachable, 4.0m
 (Bond one ferrite core)

2.4. Test Facility

Site Description

Name of Firm : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Ke Feng Rd., 52 Block, Shenzhen
Science & Industrial Park, Nantou,
Shenzhen, Guangdong, China

3m Anechoic Chamber : Jun. 13, 2006 File on Federal
Communication Commission
Registration Number: 90454

3m & 10m Anechoic Chamber : Jan. 31, 2007 File on Federal
Communication Commission
Registration Number: 794232

EMC Lab. : Accredited by DATech, German
Registration Number: DAT-P-091/99-01
Dec. 20, 2007

Accredited by NVLAP, USA
NVLAP Code: 200372-0
Apr. 01, 2007

2.5. Measurement Uncertainty

No.	Item	MU	Remark
1	Uncertainty for Conducted Emission Test	2.02dB	
2	Uncertainty for Radiated Emission Test<1GHz	3.44 dB	Polarize: V
		3.96 dB	Polarize: H
3.	Uncertainty for Radiated Emission Test>1GHz	4.79dB	
4.	Uncertainty for Frequency measure	0.42×10^{-6}	
5.	Uncertainty for conducted power measure	0.112	


3. POWER LINE CONDUCTED EMISSION TEST

3.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESHS10	844077/020	Mar 07, 08	1 Year
2.	L.I.S.N.#2	Kyoritsu	KNW-407	8-1636-1	May 10,08	1 Year
3.	L.I.S.N.#3	EMCO	3825/2	9006-1660	May 10,08	1 Year
4.	Terminator	Hubersuhner	50Ω	No. 1	May 10,08	1 Year
5.	RF Cable	Fujikura	3D-2W	LISN Cable 1#	Jan 09, 08	1/2 Year
6.	Coaxial Switch	Anritsu	MP59B	M55367	Jan 09, 08	1/2 Year
7.	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100340	Jan 09, 08	1/2 Year

3.2. Block Diagram of Test Setup

3.2.1. Block diagram of connection between the EUT and simulators

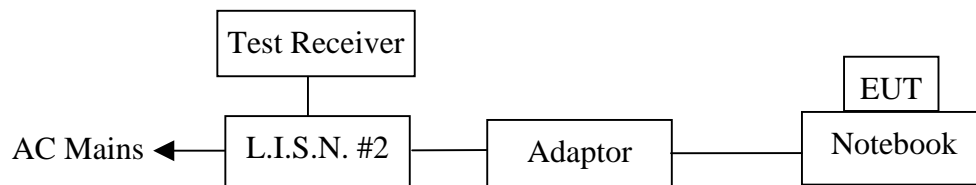

(EUT: 54M Wireless USB Adapter)

3.3. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

3.4. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

3.4.1. 54M Wireless USB Adapter (EUT)

Model Number : TL-WN323G
 Serial Number : N/A
 Manufacturer : TP-LINK Technologies Co., Ltd.

3.4.2. Support Equipment : As Tested Supporting System Detail, in Section 2.3.

3.5. Operating Condition of EUT

3.5.1. Setup the EUT and simulator as shown as Section 3.2.

3.5.2. Turn on the power of all equipment.

3.5.3. Notebook ran the Control program to control EUT Work in test mode (Tx Mode)

3.6. Test Procedure

The EUT Via Notebook is connected to the power mains through a line impedance stabilization network (L.I.S.N.#2). Power on the PC and let it work normally, we use a keyboard test soft ware, let EUT working in test mode, then test it. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2003 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESHS10) is set at 10kHz.

The frequency range from 150kHz to 30MHz is checked.

The test result are reported on Section 3.7.,


3.7. Power Line Conducted Emission Test Results

PASS. (All emissions not reported below are too low against the prescribed limits.)



NO.6 Ke Feng Road,Block 52,
Shenzhen Science&Industry Park
Nantou, Shenzhen,Guang dong, China.
Tel:+86-755-26639495
Fax:+86-755-26632877
Postcode:518057

Data: 1 File: D:\emc 002\DATA\2008 Report\T\TP-LINK\ACS8Q836.EMI (4)

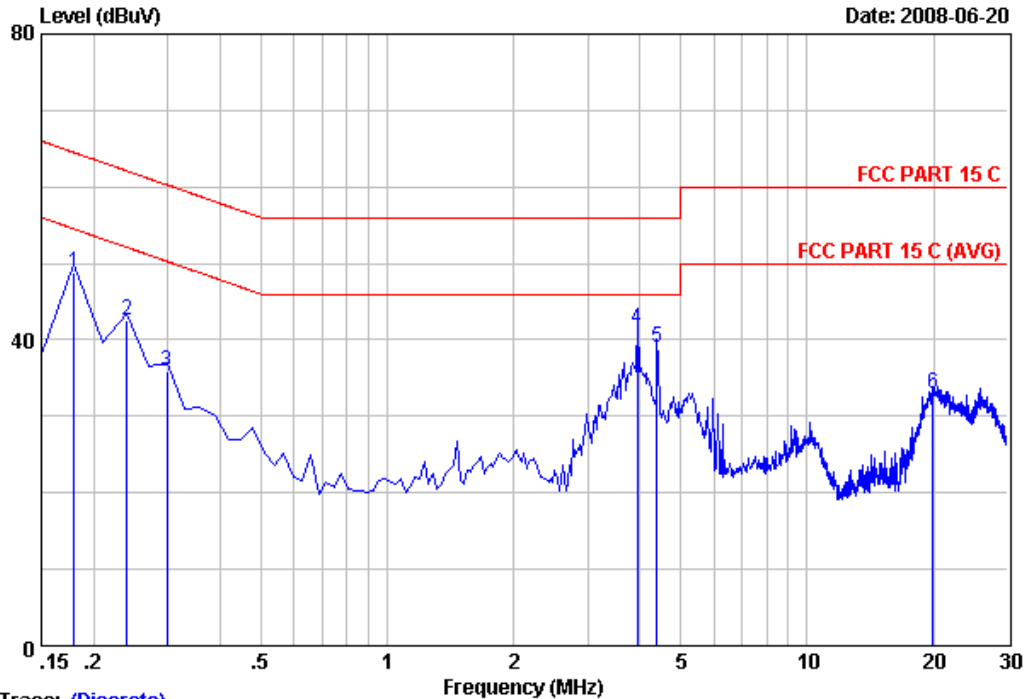

Trace: (Discrete)

Site no :Audix No.1 Conduction Data no :1
 Dis./Ant. :-- KNW407 1# VA LISN phase:
 Limit :FCC PART 15 C
 Env./Ins. :29.5*C/55% ESHS 10 Engineer :Sunny
 EUT :54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating :DC 5V From PC AC 120V/60Hz
 Test Mode :TX Mode


No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.18	0.29	10.15	38.38	48.82	64.49	15.67	QP
2	0.24	0.28	10.15	32.03	42.46	62.11	19.65	QP
3	0.30	0.26	10.15	25.57	35.98	60.26	24.28	QP
4	3.94	0.10	10.18	31.26	41.54	56.00	14.46	QP
5	4.39	0.10	10.18	28.73	39.01	56.00	16.99	QP
6	19.91	0.42	10.39	22.10	32.91	60.00	27.09	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
 2.If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.



NO.6 Ke Feng Road,Block 52,
Shenzhen Science&Industry Park
Nantou, Shenzhen,Guang dong, China.
Tel:+86-755-26639495
Fax:+86-755-26632877
Postcode:518057

Data: 2 File: D:\emc 002\DATA\2008 Report\T\TP-LINK\ACS8Q836.EMI (4)

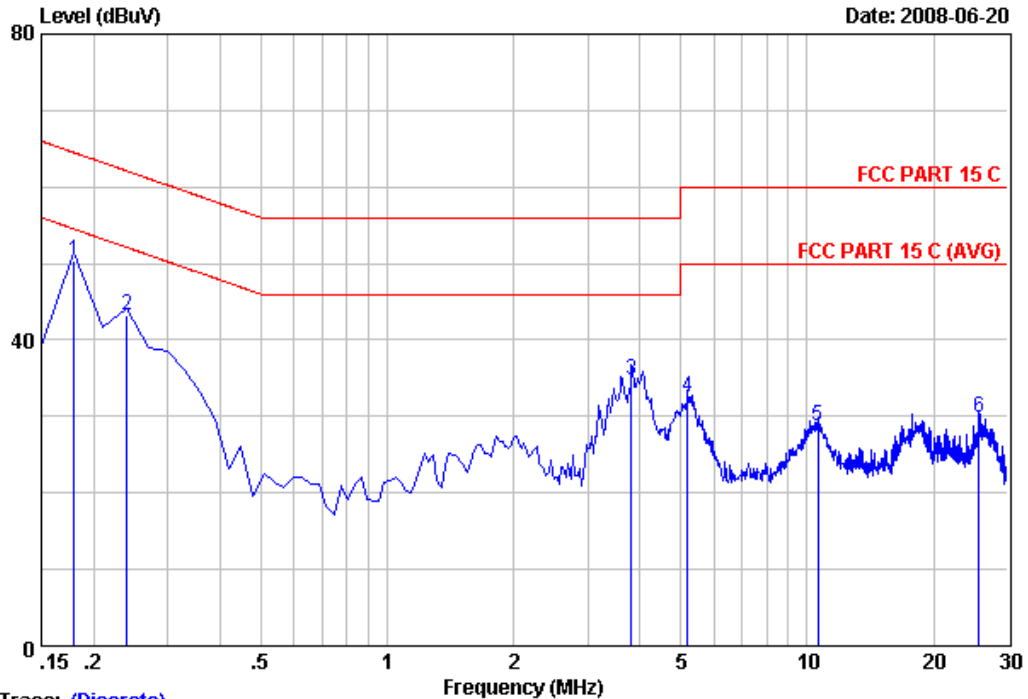

Trace: (Discrete)

Site no :Audix No.1 Conduction Data no :2
 Dis./Ant. :-- KNW407 1# VB LISN phase:
 Limit :FCC PART 15 C
 Env./Ins. :29.5*C/55% ESHS 10 Engineer :Sunny
 EUT :54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating :DC 5V From PC AC 120V/60Hz
 Test Mode :TX Mode

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.18	0.15	10.15	40.07	50.37	64.49	14.12	QP
2	0.24	0.12	10.15	32.95	43.22	62.11	18.89	QP
3	3.82	0.04	10.18	24.46	34.68	56.00	21.32	QP
4	5.19	0.05	10.19	22.29	32.53	60.00	27.47	QP
5	10.60	0.12	10.25	18.42	28.79	60.00	31.21	QP
6	25.70	0.56	10.32	18.88	29.76	60.00	30.24	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
 2.If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

4. RADIATED EMISSION TEST

4.1. Test Equipment

Frequency rang: 30~1000MHz


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3#Chamber	AUDIX	N/A	N/A	Jun 09,08	1/2 Year
2.	EMI Spectrum	Agilent	E7403A	MY42000106	May 10, 08	1 Year
3.	Test Receiver	Rohde & Schwarz	ESVS20	830350/005	May 10, 08	1 Year
4.	Amplifier	HP	8447D	2648A04738	Jan 09, 08	1/2 Year
5.	Bilog Antenna	Schaffner	CBL6112D	25237	Feb 21, 08	1 Year
6.	RF Cable	JINGCHENG	KLMR400	3# Chamber No.1	Jan 09, 08	1/2 Year
7.	RF Cable	JINGCHENG	JBV400	3# Chamber No.2	Jan 09, 08	1/2 Year
8.	RF Cable	JINGCHENG	JBV400	3# Chamber No.3	Jan 09, 08	1/2 Year
9.	RF Cable	JINGCHENG	JBV400	3# Chamber No.4	Jan 09, 08	1/2 Year
10.	Coaxial Switch	Anritsu	MP59B	M73989	Jan 09, 08	1/2 Year

Frequency rang: above 1000MHz

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	E4446A	MY41440292	May 10, 08	1 Year
2.	Amp	HP	8449B	3008A00863	May 10, 08	1 Year
3.	Antenna	EMCO	3115	9607-4877	May 27, 08	1.5 Year
4.	Antenna	EMCO	3116	00060088	May 28, 07	1.5Year
5.	HF Cable	Hubersuhne	Sucoflex104	-	May 10, 08	1 Year


4.2. Block Diagram of Test Setup

4.2.1. Block diagram of connection between the EUT and simulators



(EUT: 54M Wireless USB Adapter)

4.2.2. In Anechoic Chamber

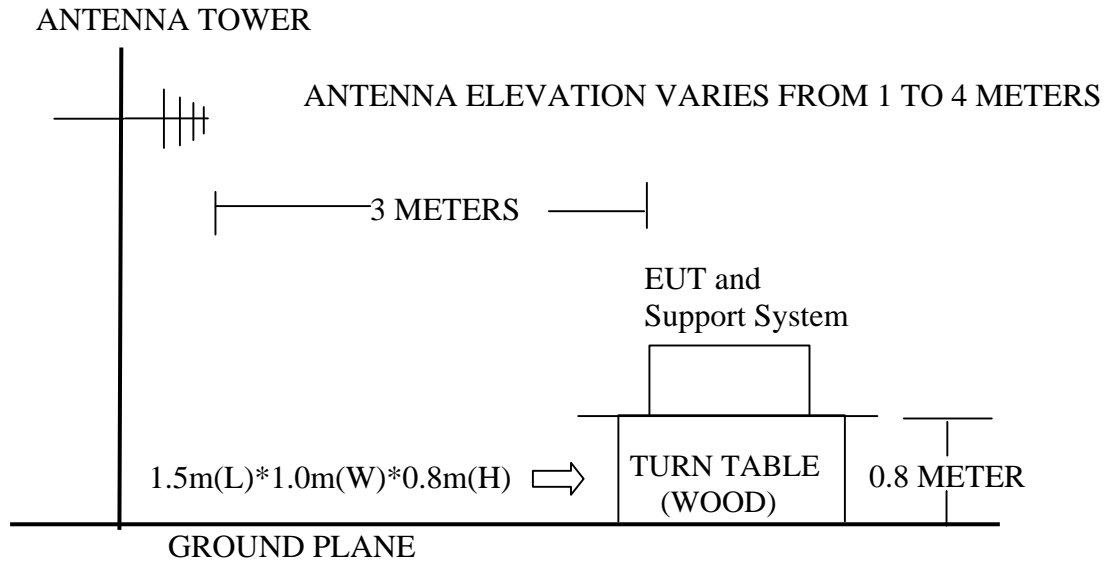

4.3. Radiated Emission Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

- Remark :
- (1) Emission level dBμV = 20 log Emission level μV/m
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

4.4. EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

4.4.1. 54M Wireless USB Adapter (EUT)

Model Number : TL-WN323G
 Serial Number : N/A
 Manufacturer : TP-LINK Technologies Co., Ltd.

4.4.2. Support Equipment : As Tested Supporting System Detail, in Section 2.3.

4.5. Operating Condition of EUT

4.5.1. Setup the EUT and simulator as shown as Section 4.2.

4.5.2. Turn on the power of all equipment.

4.5.3. Notebook ran the Control program to control EUT Work in test mode (Tx Mode)

4.6. Test Procedure

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it work normally, we use a keyboard test soft ware, let EUT working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna are set on test.

The bandwidth of the EMI test receiver (R&S ESVS20) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW 10Hz VBW for average emission above 1GHz

The frequency range from 30MHz to 10th harmonic are checked.

4.7. Radiated Emission Test Results

PASS.

The frequency range from 30MHz to 1000MHz and above 1GHz is investigated. Please see the following pages.


All the emissions 18GHz~25GHz are peak measured and comply with average limit.

Frequency: 30MHz~1GHz



No.6 Ke Feng Road,B1;ck 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen, GuangDong, China
Tel:+86-755-26639495
Fax:+86-755-26632877
Postcode:518057

Data: 2 File: D:\2008 Report Data\NTP-LINK\ACS80836.EMI (2)

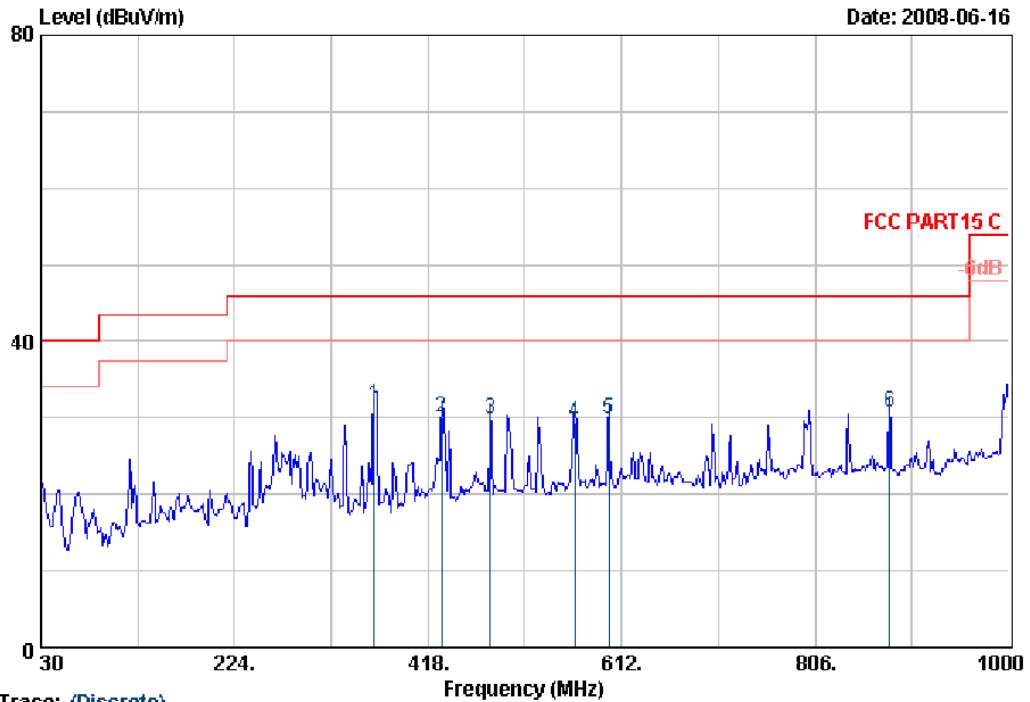

Trace: (Discrete)

Site no. : 3# Chamber Radiation Data no. : 2
 Dis. / Ant. : 3m CBL6112D Ant. pol. : HORIZONTAL
 Limit : FCC PART15 C
 Env. / Ins. : 24°C/56% ESVS20 Engineer : Jamy
 EUT : 54M Wireless USB Adapter
 Power Rating : DC 5V From PC AC 120V/60 M/N:TL-WN323G
 Test Mode : Tx Mode


	Ant.	Cable	Emission		Limits	Margin	Remark
Freq. (MHz)	Factor (dB/m)	Loss (dB)	Reading (dBuV)	Level (dBuV/m)	(dBuV/m)	(dB)	
1	14.53	1.52	15.51	31.56	46.00	14.44	QP
2	16.77	1.66	11.72	30.15	46.00	15.85	QP
3	17.60	1.75	10.48	29.83	46.00	16.17	QP
4	18.64	1.90	8.89	29.43	46.00	16.57	QP
5	18.49	2.01	9.44	29.94	46.00	16.06	QP
6	19.94	2.47	8.23	30.64	46.00	15.36	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,
Shenzhen Science & Industry Park
Noutou,Shenzhen,GuangDong,China
Tel:+86-755-26639495
Fax:+86-755-26632877
Postcode:518057

Data: 1 File: D:\2008 Report Data\TTP-LINK\ACS8Q836.EMI (2)

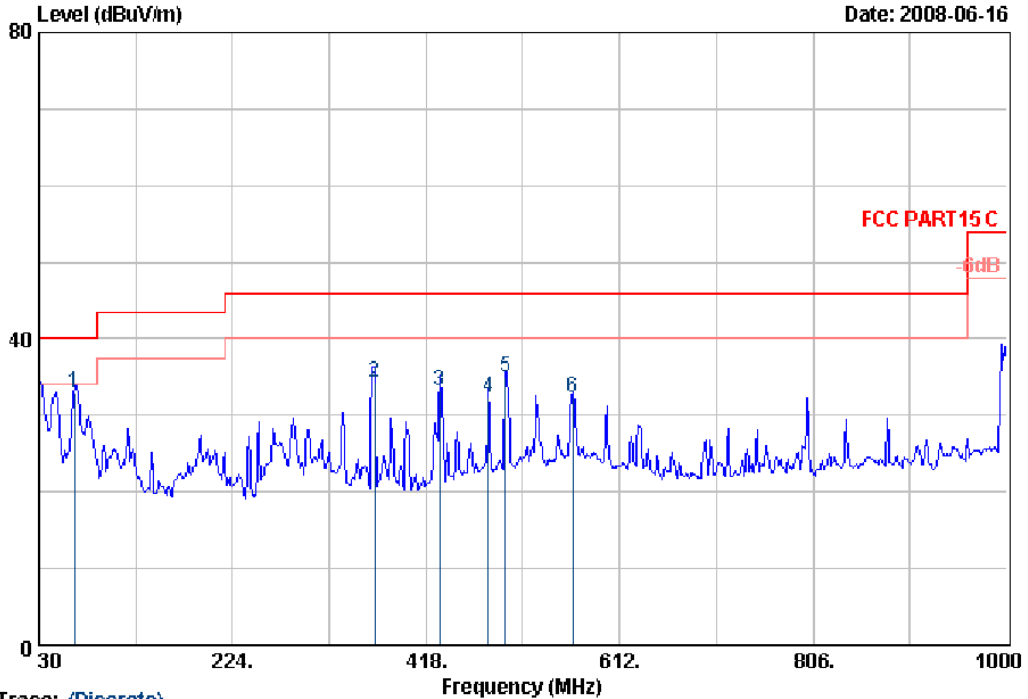

Trace: (Discrete)

Site no. : 3# Chamber Radiation Data no. : 1
 Dis. / Ant. : 3m CBL6112D Ant. pol. : VERTICAL
 Limit : FCC PART15 C
 Env. / Ins. : 24°C/56% ESVS20 Engineer : Jamy
 EUT : 54M Wireless USB Adapter
 Power Rating : DC 5V From PC AC 120V/60 M/N:TL-WN323G
 Test Mode : Tx Mode


Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission		Margin (dB)	Remark
				Level (dBuV/m)	Limits (dBuV/m)		
1	65.89	0.66	25.94	32.93	40.00	7.07	QP
2	366.59	14.55	18.33	34.38	46.00	11.62	QP
3	431.58	16.77	14.68	33.11	46.00	12.89	QP
4	480.08	17.60	13.00	32.35	46.00	13.65	QP
5	497.54	17.75	15.31	34.89	46.00	11.11	QP
6	565.44	18.64	11.73	32.27	46.00	13.73	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Frequency: 1GHz~18GHz



No.6 Ke Feng Road,B1:ck 52,
 ShenZhen Science & Industry Park
 Noutou, ShenZhen, GuangDong, China
 Tel:+86-755-26639495-7
 Fax:+86-755-26632877
 Postcode:518057

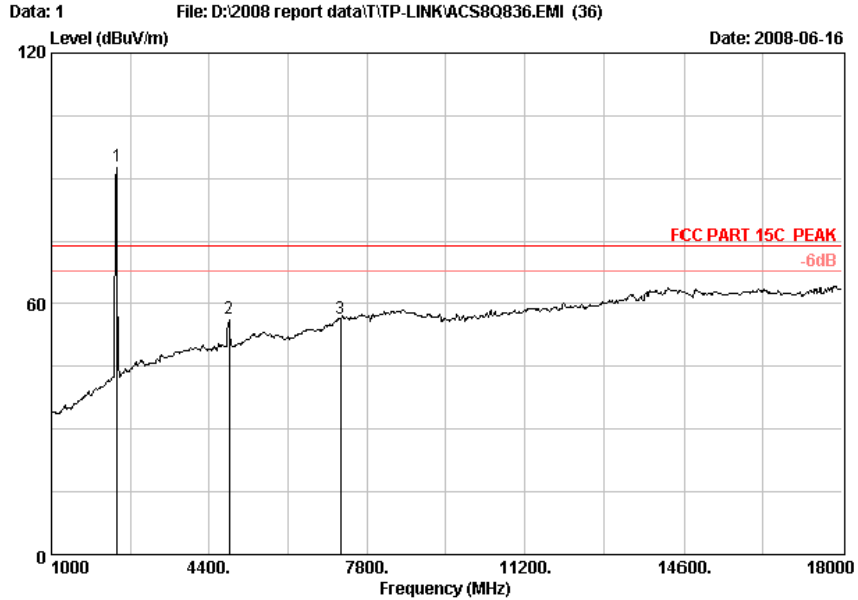


Site no. : RF Chamber Data no. : 1
 Dis. / Ant. : 3m 3115 FACTOR Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Sunny
 EUT : 54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating: DC 5V From PC AC 120V/60Hz
 Test Mode : IEEE802.11b CH1:2412MHz

	Ant.	Cable	Amp	Emission		Limits	Margin	Remark
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2412.00	29.03	6.73	35.18	92.45	93.03	74.00	-19.03 Peak
2	4824.00	34.02	10.55	34.49	46.44	56.52	74.00	17.48 Peak
3	7236.00	37.39	12.16	34.44	41.47	56.58	74.00	17.42 Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,B1;ck 52,
 ShenZhen Science & Industry Park
 Noutou,ShenZhen,GuangDong,China
 Tel:+86-755-26639495-7
 Fax:+86-755-26632877
 Postcode:518057

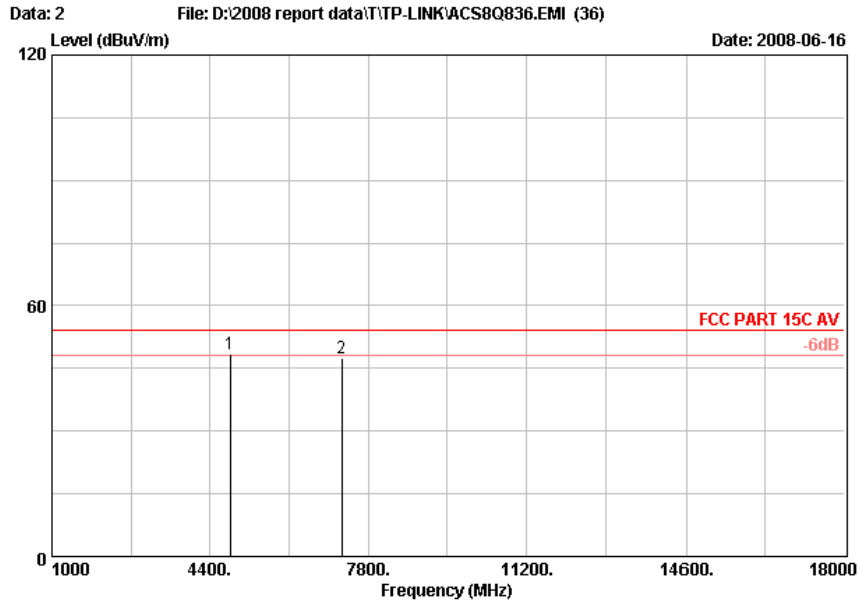


Site no. : RF Chamber Data no. : 2
 Dis. / Ant. : 3m 3115 FACTOR Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Sunny
 EUT : 54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating: DC 5V From PC AC 120V/60Hz
 Test Mode : IEEE802.11b CH1:2412MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	34.02	10.55	34.49	38.47	48.55	54.00	5.45	Average
2	7236.00	37.39	12.16	34.44	32.48	47.59	54.00	6.41	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,B1:ck 52,
 ShenZhen Science & Industry Park
 Noutou,ShenZhen,GuangDong,China
 Tel:+86-755-26639495-7
 Fax:+86-755-26632877
 Postcode:518057

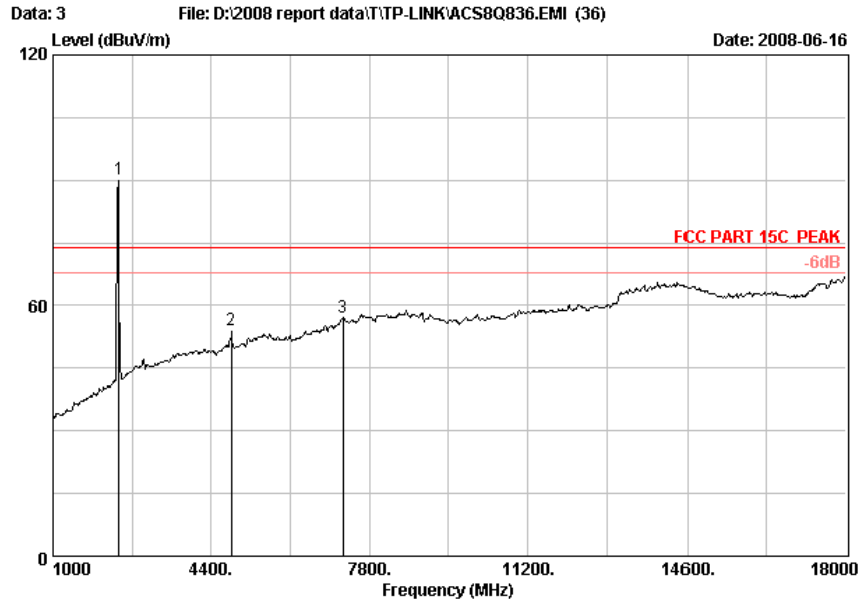


Site no. : RF Chamber Data no. : 3
 Dis. / Ant. : 3m 3115 FACTOR Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Sunny
 EUT : 54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating: DC 5V From PC AC 120V/60Hz
 Test Mode : IEEE802.11b CH1:2412MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	29.03	6.73	35.18	89.61	90.19	74.00	-16.19	Peak
2	4824.00	34.02	10.55	34.49	44.01	54.09	74.00	19.91	Peak
3	7236.00	37.39	12.16	34.44	42.20	57.31	74.00	16.69	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,B1:ck 52,
 ShenZhen Science & Industry Park
 Noutou,ShenZhen,GuangDong,China
 Tel:+86-755-26639495-7
 Fax:+86-755-26632877
 Postcode:518057

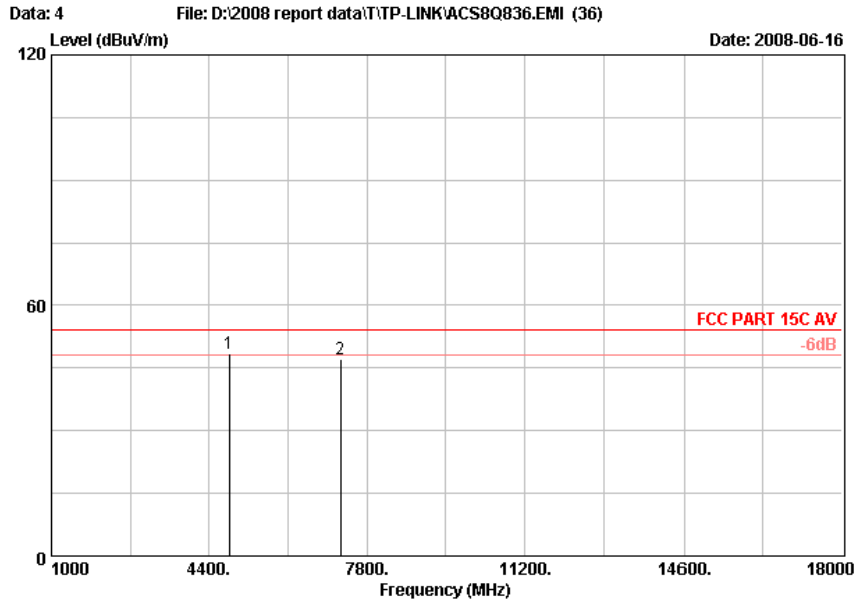


Site no. : RF Chamber Data no. : 4
 Dis. / Ant. : 3m 3115 FACTOR Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Sunny
 EUT : 54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating: DC 5V From PC AC 120V/60Hz
 Test Mode : IEEE802.11b CH1:2412MHz

	Freq.	Ant. Factor	Cable Loss	Amp Factor	Reading	Emission Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	4824.00	34.02	10.55	34.49	38.24	48.32	54.00	5.68	Average
2	7236.00	37.39	12.16	34.44	31.90	47.01	54.00	6.99	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,B1:ck 52,
 ShenZhen Science & Industry Park
 Noutou,ShenZhen,GuangDong,China
 Tel:+86-755-26639495-7
 Fax:+86-755-26632877
 Postcode:518057

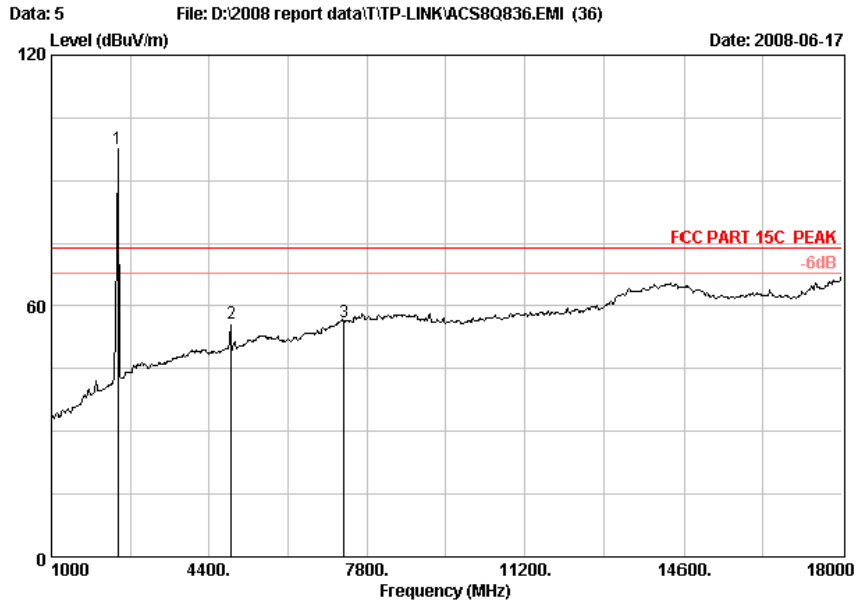


Site no. : RF Chamber Data no. : 5
 Dis. / Ant. : 3m 3115 FACTOR Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Sunny
 EUT : 54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating: DC 5V From PC AC 120V/60Hz
 Test Mode : IEEE802.11b CH6:2437MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	29.11	6.80	35.17	96.77	97.51	74.00	-23.51	Peak
2	4874.00	34.16	10.56	34.48	45.47	55.71	74.00	18.29	Peak
3	7311.00	37.50	12.17	34.46	41.10	56.31	74.00	17.69	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,B1:ck 52,
 ShenZhen Science & Industry Park
 Noutou,ShenZhen,GuangDong,China
 Tel:+86-755-26639495-7
 Fax:+86-755-26632877
 Postcode:518057

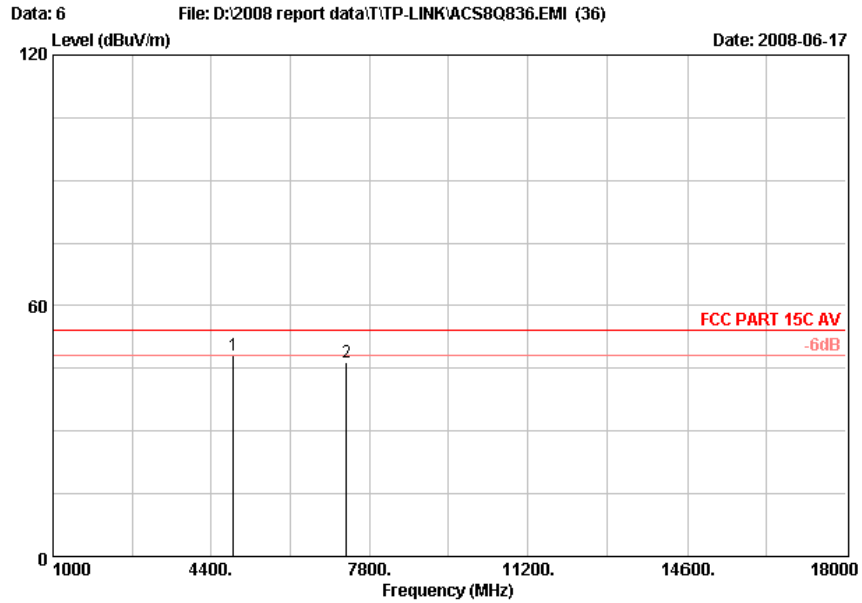


Site no. : RF Chamber Data no. : 6
 Dis. / Ant. : 3m 3115 FACTOR Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Sunny
 EUT : 54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating: DC 5V From PC AC 120V/60Hz
 Test Mode : IEEE802.11b CH6:2437MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	34.16	10.56	34.48	37.99	48.23	54.00	5.77	Average
2	7311.00	37.50	12.17	34.46	31.10	46.31	54.00	7.69	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,B1:ck 52,
 ShenZhen Science & Industry Park
 Noutou,ShenZhen,GuangDong,China
 Tel:+86-755-26639495-7
 Fax:+86-755-26632877
 Postcode:518057

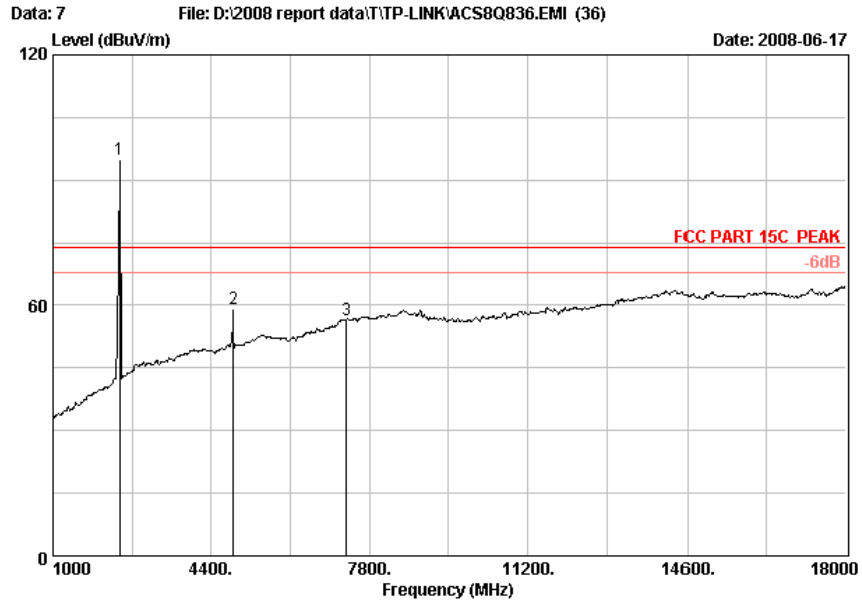


Site no. : RF Chamber Data no. : 7
 Dis. / Ant. : 3m 3115 FACTOR Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Sunny
 EUT : 54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating: DC 5V From PC AC 120V/60Hz
 Test Mode : IEEE802.11b CH6:2437MHz

	Freq.	Ant.	Cable	Amp	Emission		Limits	Margin	Remark
	(MHz)	(dB/m)	Loss	Factor	Reading	Level	(dBuV/m)	(dB)	
			(dB)	(dB)	(dBuV)	(dBuV/m)			
1	2437.00	29.11	6.80	35.17	94.19	94.93	74.00	-20.93	Peak
2	4874.00	34.16	10.56	34.48	48.97	59.21	74.00	14.79	Peak
3	7311.00	37.50	12.17	34.46	41.42	56.63	74.00	17.37	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,B1:ck 52,
 ShenZhen Science & Industry Park
 Noutou,ShenZhen,GuangDong,China
 Tel:+86-755-26639495-7
 Fax:+86-755-26632877
 Postcode:518057

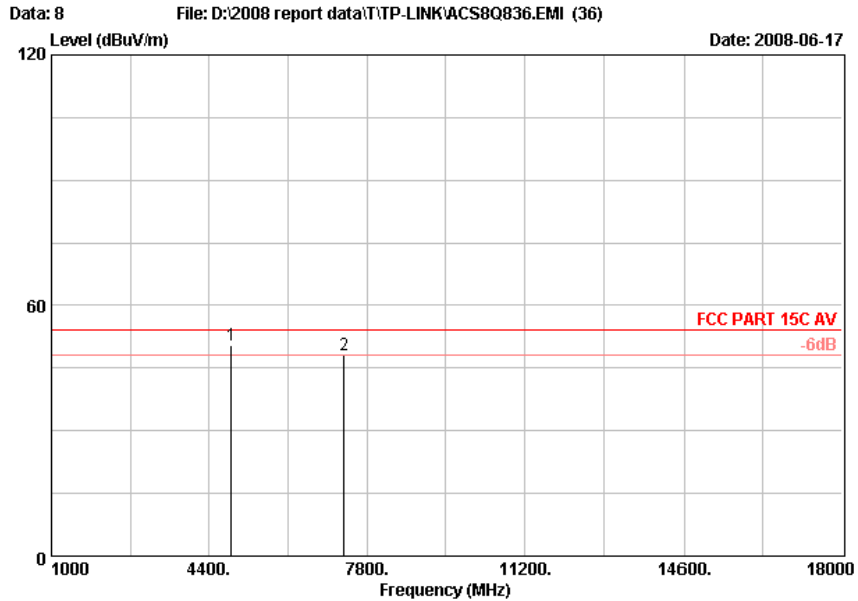


Site no. : RF Chamber Data no. : 8
 Dis. / Ant. : 3m 3115 FACTOR Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Sunny
 EUT : 54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating: DC 5V From PC AC 120V/60Hz
 Test Mode : IEEE802.11b CH6:2437MHz

	Freq.	Ant. Factor	Cable Loss	Amp Factor	Reading	Emission Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	4874.00	34.16	10.56	34.48	40.10	50.34	54.00	3.66	Average
2	7311.00	37.50	12.17	34.46	32.82	48.03	54.00	5.97	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,B1:ck 52,
 ShenZhen Science & Industry Park
 Noutou,ShenZhen,GuangDong,China
 Tel:+86-755-26639495-7
 Fax:+86-755-26632877
 Postcode:518057

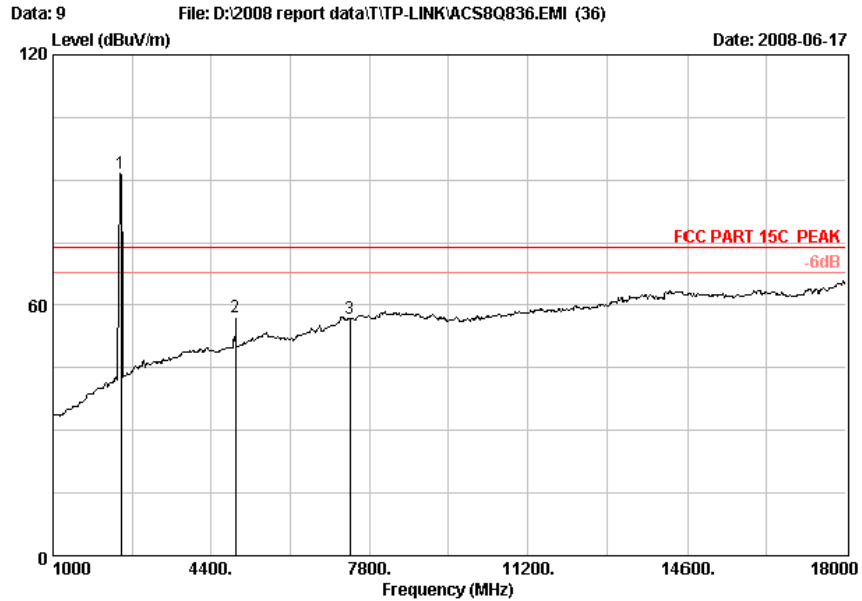


Site no. : RF Chamber Data no. : 9
 Dis. / Ant. : 3m 3115 FACTOR Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Sunny
 EUT : 54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating: DC 5V From PC AC 120V/60Hz
 Test Mode : IEEE802.11b CH11:2462MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	29.15	6.84	35.17	90.71	91.53	74.00	-17.53	Peak
2	4924.00	34.29	10.58	34.47	46.80	57.20	74.00	16.80	Peak
3	7386.00	37.63	12.31	34.47	41.46	56.93	74.00	17.07	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,B1:ck 52,
 ShenZhen Science & Industry Park
 Noutou,ShenZhen,GuangDong,China
 Tel:+86-755-26639495-7
 Fax:+86-755-26632877
 Postcode:518057

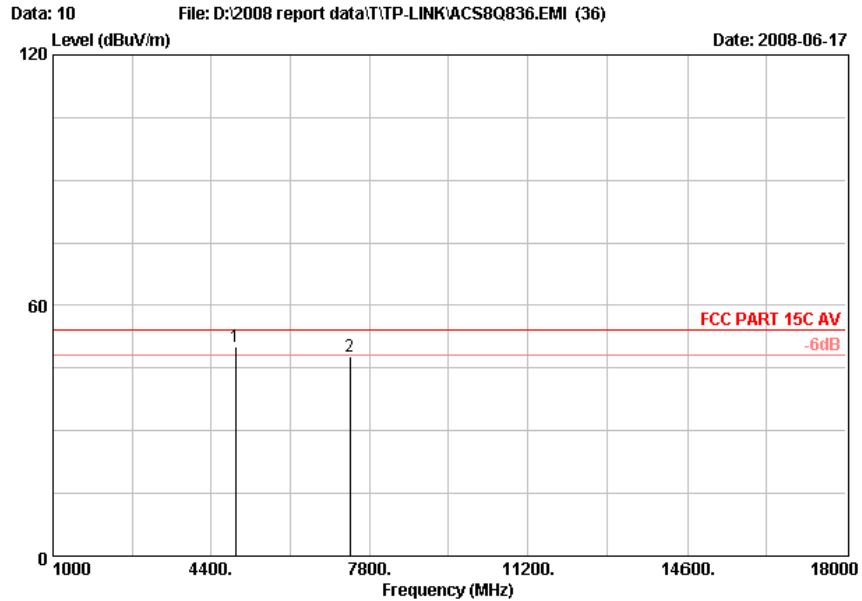


Site no. : RF Chamber Data no. : 10
 Dis. / Ant. : 3m 3115 FACTOR Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Sunny
 EUT : 54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating: DC 5V From PC AC 120V/60Hz
 Test Mode : IEEE802.11b CH11:2462MHz

	Freq.	Ant.	Cable	Amp	Emission				Remark
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	4924.00	34.29	10.58	34.47	39.75	50.15	54.00	3.85	Average
2	7386.00	37.63	12.31	34.47	32.35	47.82	54.00	6.18	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,B1:ck 52,
 ShenZhen Science & Industry Park
 Noutou,ShenZhen,GuangDong,China
 Tel:+86-755-26639495-7
 Fax:+86-755-26632877
 Postcode:518057

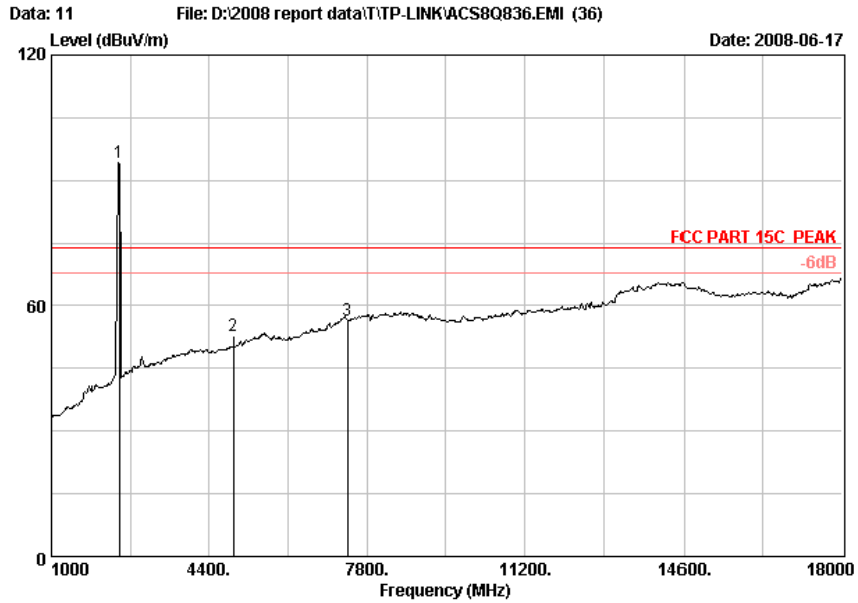


Site no. : RF Chamber Data no. : 11
 Dis. / Ant. : 3m 3115 FACTOR Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Sunny
 EUT : 54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating: DC 5V From PC AC 120V/60Hz
 Test Mode : IEEE802.11b CH11:2462MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	29.15	6.84	35.17	93.30	94.12	74.00	-20.12	Peak
2	4924.00	34.29	10.58	34.47	42.36	52.76	74.00	21.24	Peak
3	7386.00	37.63	12.31	34.47	41.08	56.55	74.00	17.45	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,B1:ck 52,
 ShenZhen Science & Industry Park
 Noutou,ShenZhen,GuangDong,China
 Tel:+86-755-26639495-7
 Fax:+86-755-26632877
 Postcode:518057

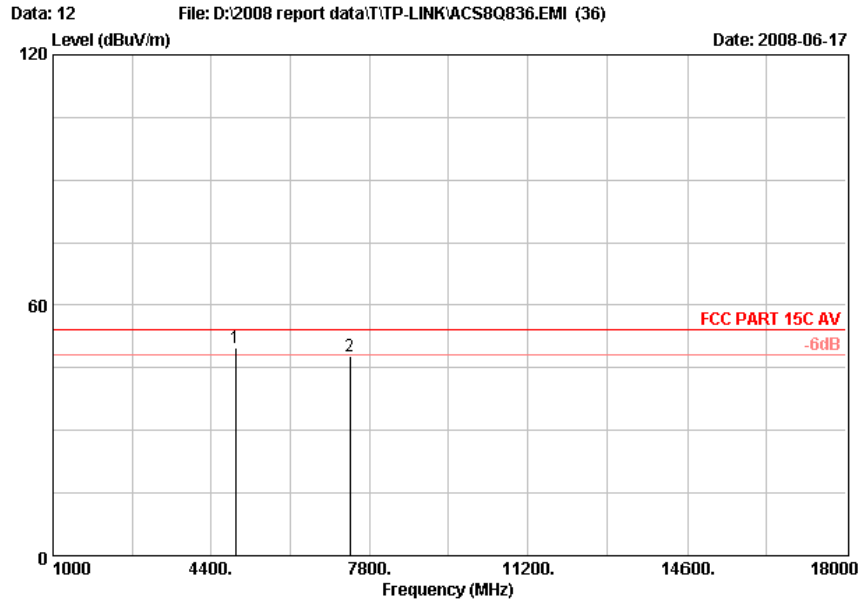


Site no. : RF Chamber Data no. : 12
 Dis. / Ant. : 3m 3115 FACTOR Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Sunny
 EUT : 54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating: DC 5V From PC AC 120V/60Hz
 Test Mode : IEEE802.11b CH11:2462MHz

	Freq.	Ant.	Cable	Amp	Emission				Remark
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	4924.00	34.29	10.58	34.47	39.54	49.94	54.00	4.06	Average
2	7386.00	37.63	12.31	34.47	32.25	47.72	54.00	6.28	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,B1;ck 52,
 ShenZhen Science & Industry Park
 Noutou,ShenZhen,GuangDong,China
 Tel:+86-755-26639495-7
 Fax:+86-755-26632877
 Postcode:518057

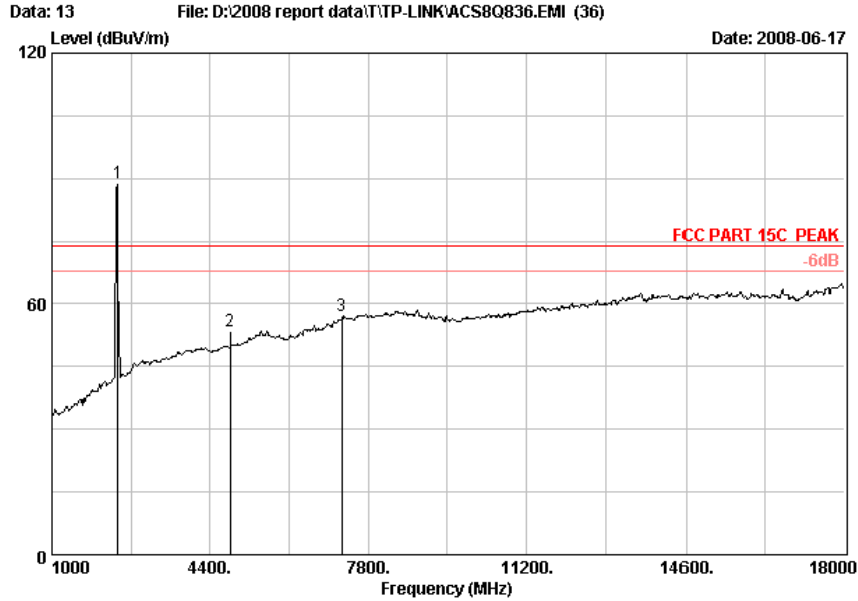


Site no. : RF Chamber Data no. : 13
 Dis. / Ant. : 3m 3115 FACTOR Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Sunny
 EUT : 54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating: DC 5V From PC AC 120V/60Hz
 Test Mode : IEEE802.11g CH1:2412MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	29.03	6.73	35.18	88.24	88.82	74.00	-14.82	Peak
2	4824.00	34.02	10.55	34.49	43.24	53.32	74.00	20.68	Peak
3	7236.00	37.39	12.16	34.44	42.17	57.28	74.00	16.72	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,B1:ck 52,
 ShenZhen Science & Industry Park
 Noutou,ShenZhen,GuangDong,China
 Tel:+86-755-26639495-7
 Fax:+86-755-26632877
 Postcode:518057

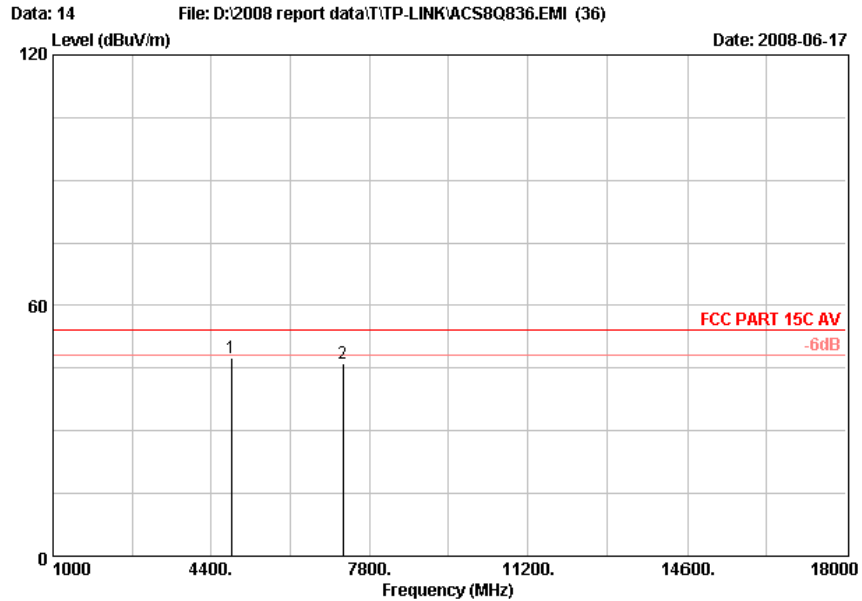


Site no. : RF Chamber Data no. : 14
 Dis. / Ant. : 3m 3115 FACTOR Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Sunny
 EUT : S4M Wireless USB Adapter M/N:TL-WN323G
 Power Rating: DC 5V From PC AC 120V/60Hz
 Test Mode : IEEE802.11g CH1:2412MHz

	Freq.	Ant.	Cable	Amp	Emission				Remark
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	4824.00	34.02	10.55	34.49	37.44	47.52	54.00	6.48	Average
2	7236.00	37.39	12.16	34.44	31.17	46.28	54.00	7.72	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,B1;ck 52,
 ShenZhen Science & Industry Park
 Noutou,ShenZhen,GuangDong,China
 Tel:+86-755-26639495-7
 Fax:+86-755-26632877
 Postcode:518057

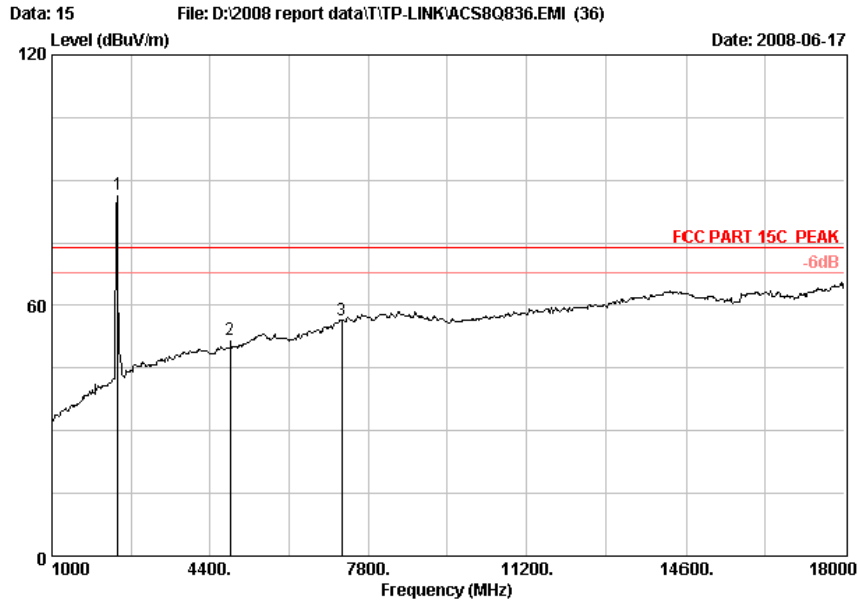


Site no. : RF Chamber Data no. : 15
 Dis. / Ant. : 3m 3115 FACTOR Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Sunny
 EUT : 54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating: DC 5V From PC AC 120V/60Hz
 Test Mode : IEE802.11g CH1:2412MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	29.03	6.73	35.18	86.02	86.60	74.00	-12.60	Peak
2	4824.00	34.02	10.55	34.49	41.63	51.71	74.00	22.29	Peak
3	7236.00	37.39	12.16	34.44	41.30	56.41	74.00	17.59	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,B1;ck 52,
 ShenZhen Science & Industry Park
 Noutou,ShenZhen,GuangDong,China
 Tel:+86-755-26639495-7
 Fax:+86-755-26632877
 Postcode:518057

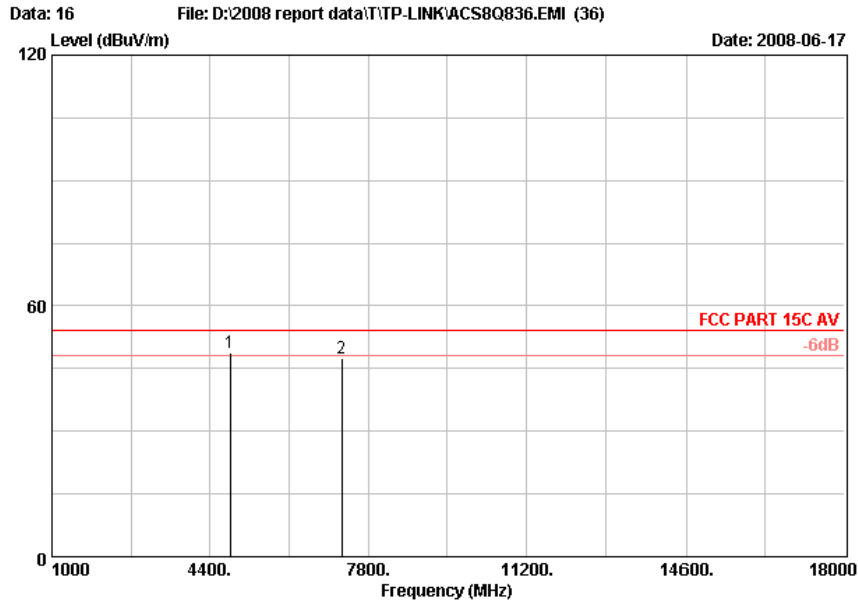


Site no. : RF Chamber Data no. : 16
 Dis. / Ant. : 3m 3115 FACTOR Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Sunny
 EUT : 54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating: DC 5V From PC AC 120V/60Hz
 Test Mode : IEEE802.11g CH1:2412MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	34.02	10.55	34.49	38.63	48.71	54.00	5.29	Average
2	7236.00	37.39	12.16	34.44	32.30	47.41	54.00	6.59	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,B1:ck 52,
 ShenZhen Science & Industry Park
 Noutou,ShenZhen,GuangDong,China
 Tel:+86-755-26639495-7
 Fax:+86-755-26632877
 Postcode:518057

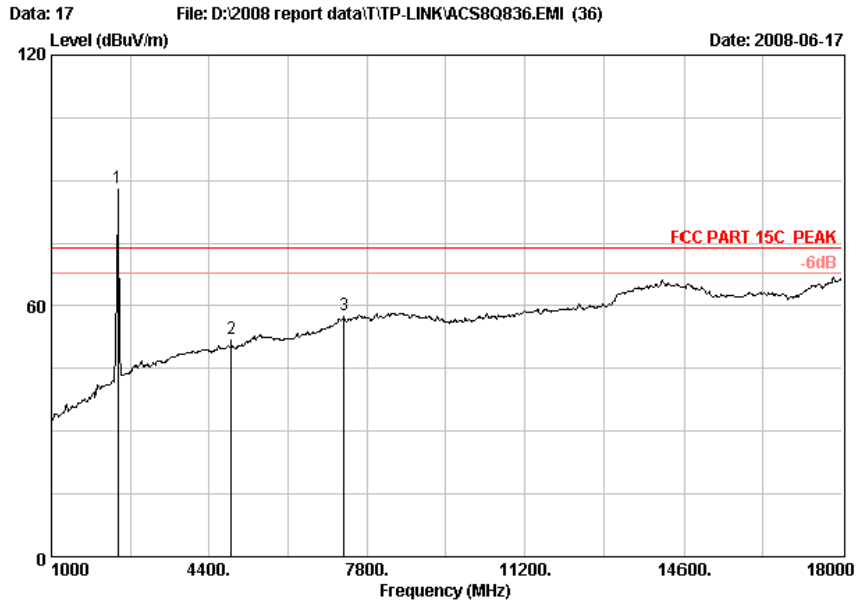


Site no. : RF Chamber Data no. : 17
 Dis. / Ant. : 3m 3115 FACTOR Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Sunny
 EUT : 54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating: DC 5V From PC AC 120V/60Hz
 Test Mode : IEEE802.11g CH6:2437MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	29.11	6.80	35.17	87.44	88.18	74.00	-14.18	Peak
2	4874.00	34.16	10.56	34.48	42.04	52.28	74.00	21.72	Peak
3	7311.00	37.50	12.17	34.46	42.63	57.84	74.00	16.16	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,B1:ck 52,
 ShenZhen Science & Industry Park
 Noutou,ShenZhen,GuangDong,China
 Tel:+86-755-26639495-7
 Fax:+86-755-26632877
 Postcode:518057

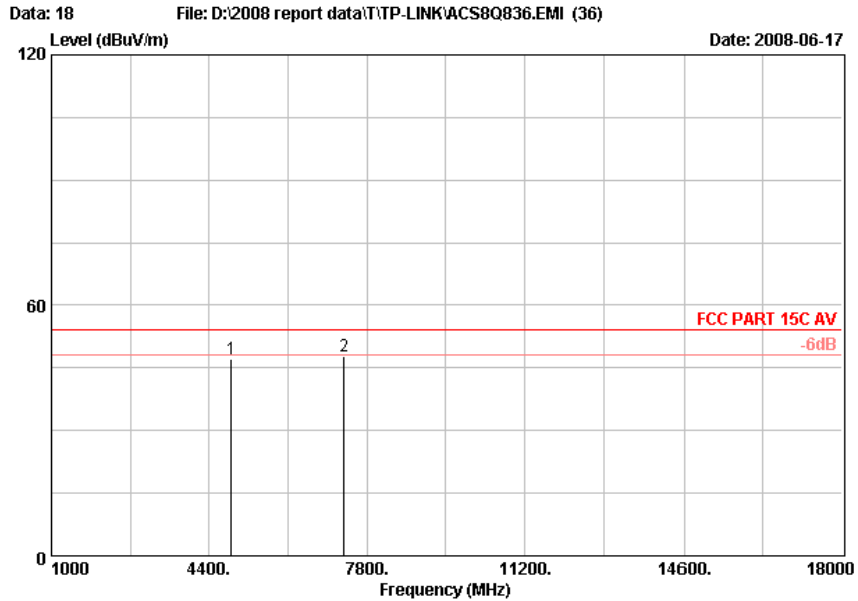


Site no. : RF Chamber Data no. : 18
 Dis. / Ant. : 3m 3115 FACTOR Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Sunny
 EUT : 54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating: DC 5V From PC AC 120V/60Hz
 Test Mode : IEEE802.11g CH6:2437MHz

	Freq.	Ant. Factor	Cable Loss	Amp Factor	Reading	Emission Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	4874.00	34.16	10.56	34.48	37.04	47.28	54.00	6.72	Average
2	7311.00	37.50	12.17	34.46	32.63	47.84	54.00	6.16	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,B1:ck 52,
 ShenZhen Science & Industry Park
 Noutou,ShenZhen,GuangDong,China
 Tel:+86-755-26639495-7
 Fax:+86-755-26632877
 Postcode:518057

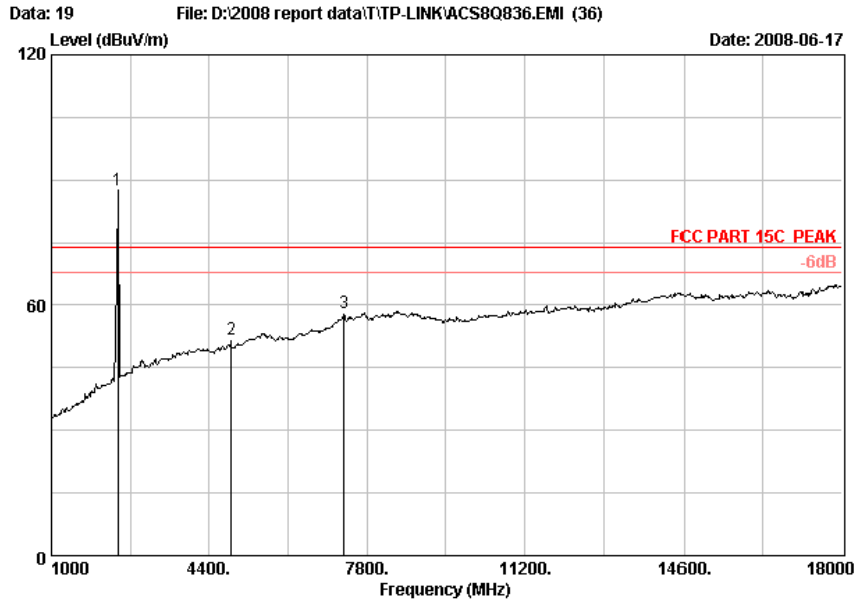


Site no. : RF Chamber Data no. : 19
 Dis. / Ant. : 3m 3115 FACTOR Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Sunny
 EUT : 54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating: DC 5V From PC AC 120V/60Hz
 Test Mode : IEEE802.11g CH6:2437MHz

	Freq.	Ant. Factor	Cable Loss	Amp Factor	Reading	Emission Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2437.00	29.11	6.80	35.17	86.72	87.46	74.00	-13.46	Peak
2	4874.00	34.16	10.56	34.48	41.70	51.94	74.00	22.06	Peak
3	7311.00	37.50	12.17	34.46	43.02	58.23	74.00	15.77	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,B1:ck 52,
 ShenZhen Science & Industry Park
 Noutou,ShenZhen,GuangDong,China
 Tel:+86-755-26639495-7
 Fax:+86-755-26632877
 Postcode:518057

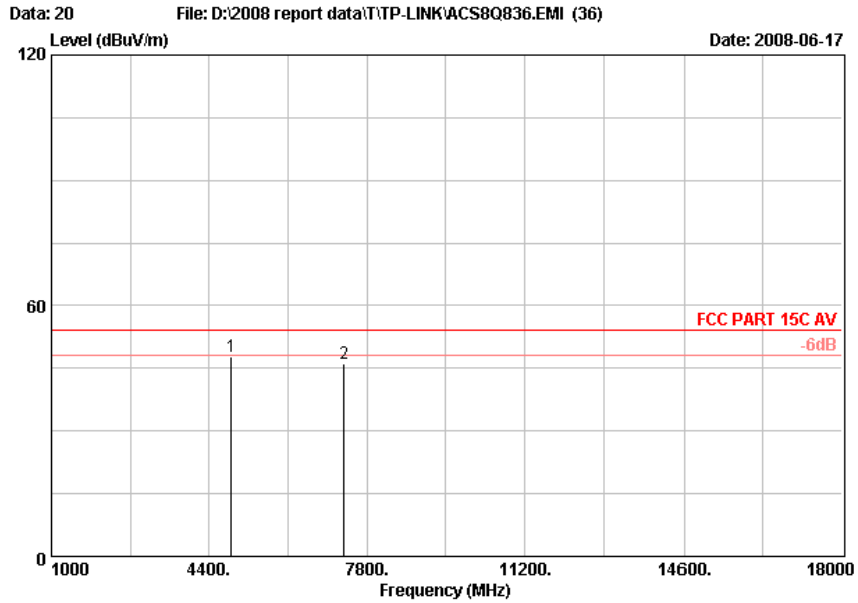


Site no. : RF Chamber Data no. : 20
 Dis. / Ant. : 3m 3115 FACTOR Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Sunny
 EUT : 54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating: DC 5V From PC AC 120V/60Hz
 Test Mode : IEEE802.11g CH6:2437MHz

	Freq.	Ant.	Cable	Amp	Emission				Remark
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	4874.00	34.16	10.56	34.48	37.70	47.94	54.00	6.06	Average
2	7311.00	37.50	12.17	34.46	31.02	46.23	54.00	7.77	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,B1:ck 52,
 ShenZhen Science & Industry Park
 Noutou,ShenZhen,GuangDong,China
 Tel:+86-755-26639495-7
 Fax:+86-755-26632877
 Postcode:518057

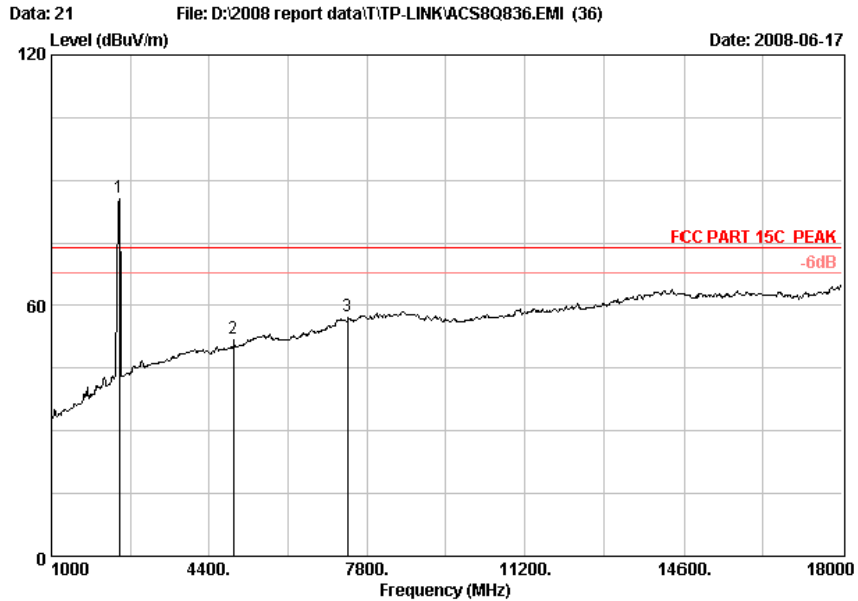


Site no. : RF Chamber Data no. : 21
 Dis. / Ant. : 3m 3115 FACTOR Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Sunny
 EUT : 54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating: DC 5V From PC AC 120V/60Hz
 Test Mode : IEEE802.11g CH11:2462MHz

	Freq.	Ant. Factor	Cable Loss	Amp Factor	Reading	Emission Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2462.00	29.15	6.84	35.17	85.16	85.98	74.00	-11.98	Peak
2	4924.00	34.29	10.58	34.47	41.81	52.21	74.00	21.79	Peak
3	7386.00	37.63	12.31	34.47	42.17	57.64	74.00	16.36	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,B1:ck 52,
 ShenZhen Science & Industry Park
 Noutou,ShenZhen,GuangDong,China
 Tel:+86-755-26639495-7
 Fax:+86-755-26632877
 Postcode:518057

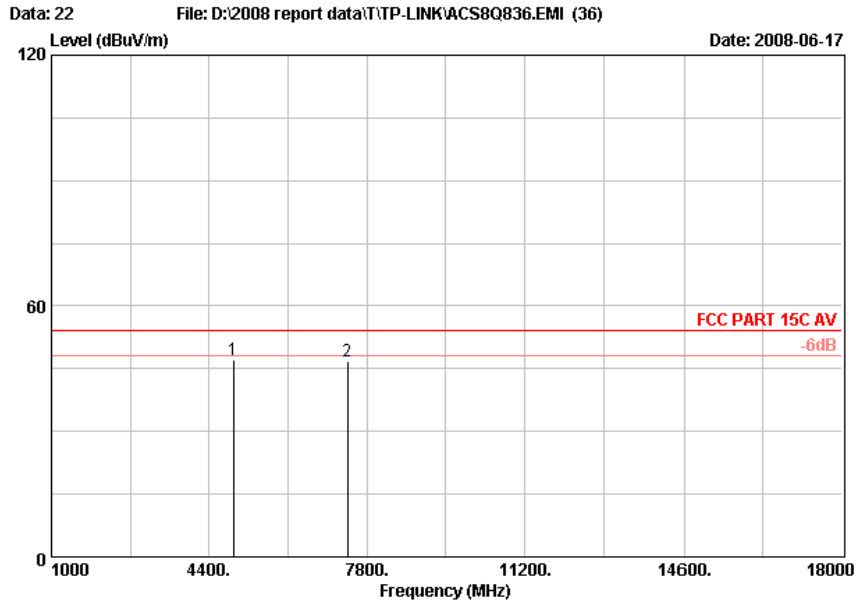


Site no. : RF Chamber Data no. : 22
 Dis. / Ant. : 3m 3115 FACTOR Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Sunny
 EUT : 54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating: DC 5V From PC AC 120V/60Hz
 Test Mode : IEEE802.11g CH11:2462MHz

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission			Margin (dB)	Remark	
				Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)			
1	4924.00	34.29	10.58	34.47	36.81	47.21	54.00	6.79	Average
2	7386.00	37.63	12.31	34.47	31.17	46.64	54.00	7.36	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,B1;ck 52,
 ShenZhen Science & Industry Park
 Noutou,ShenZhen,GuangDong,China
 Tel:+86-755-26639495-7
 Fax:+86-755-26632877
 Postcode:518057

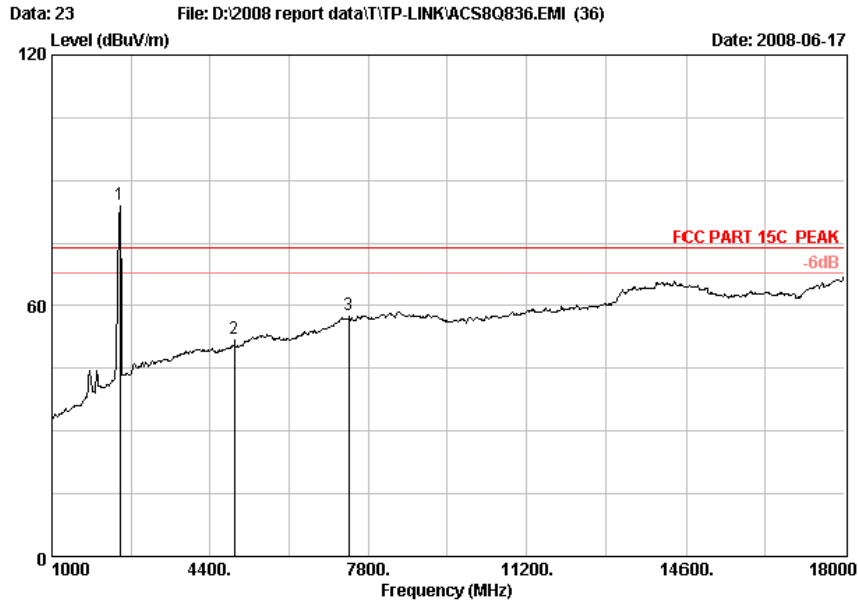


Site no. : RF Chamber Data no. : 23
 Dis. / Ant. : 3m 3115 FACTOR Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Sunny
 EUT : 54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating: DC 5V From PC AC 120V/60Hz
 Test Mode : IEE802.11g CH11:2462MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	29.15	6.84	35.17	83.36	84.18	74.00	-10.18	Peak
2	4924.00	34.29	10.58	34.47	41.81	52.21	74.00	21.79	Peak
3	7386.00	37.63	12.31	34.47	42.30	57.77	74.00	16.23	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,B1;ck 52,
 ShenZhen Science & Industry Park
 Noutou,ShenZhen,GuangDong,China
 Tel:+86-755-26639495-7
 Fax:+86-755-26632877
 Postcode:518057

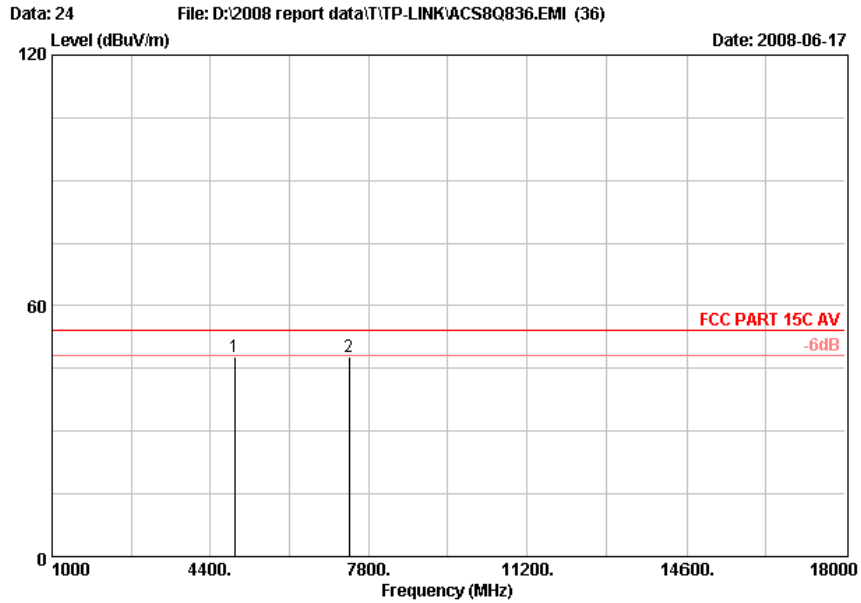

Site no. : RF Chamber Data no. : 24
 Dis. / Ant. : 3m 3115 FACTOR Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Sunny
 EUT : 54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating: DC 5V From PC AC 120V/60Hz
 Test Mode : IEEE802.11g CH11:2462MHz


Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission			Margin (dB)	Remark	
				Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)			
1	4924.00	34.29	10.58	34.47	37.47	47.87	54.00	6.13	Average
2	7386.00	37.63	12.31	34.47	32.30	47.77	54.00	6.23	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.


Frequency: 18GHz~25GHz



No.6 Ke Feng Road,B1;ck 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

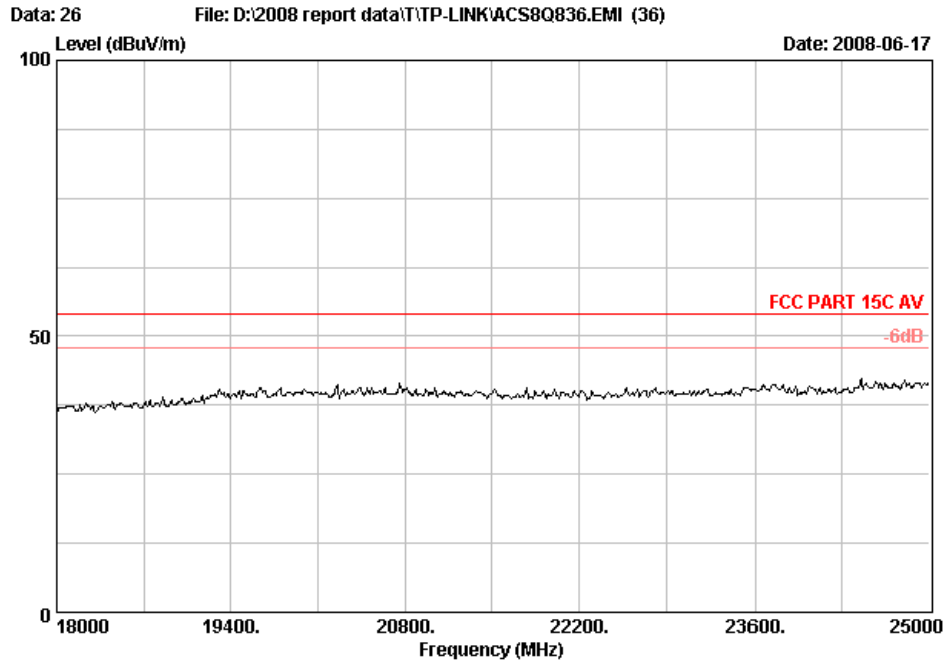


Site no. : RF Chamber Data no. : 26
Dis. / Ant. : 3m 3116 FACTOR Ant. pol. : HORIZONTAL
Limit : FCC PART 15C AV
Env. / Ins. : 23°C/54% Engineer : Sunny
EUT : 54M Wireless USB Adapter M/N:TL-WN323G
Power Rating: DC 5V From PC AC 120V/60Hz
Test Mode : IEEE802.11b CH1:2412MHz

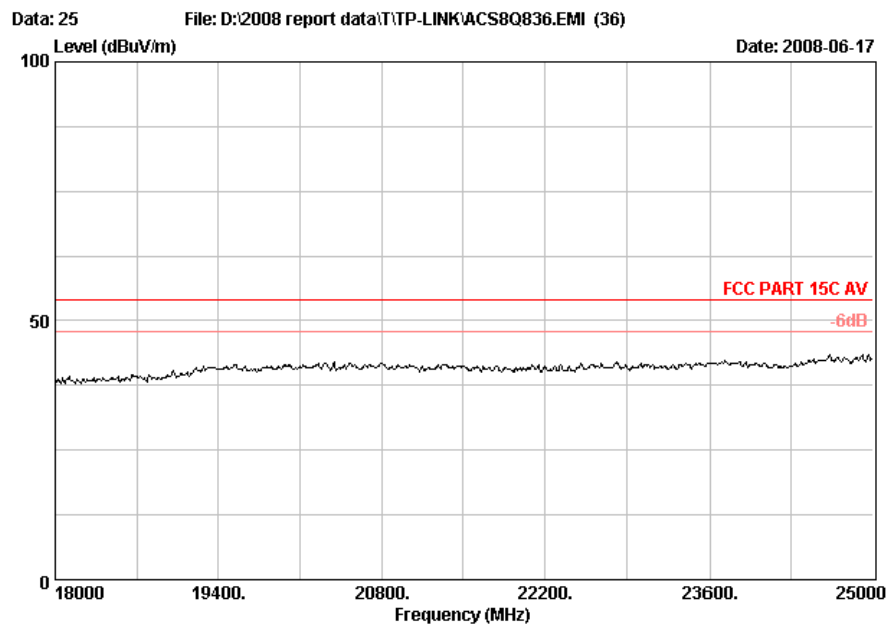


Site no. : RF Chamber Data no. : 25
Dis. / Ant. : 3m 3116 FACTOR Ant. pol. : VERTICAL
Limit : FCC PART 15C AV
Env. / Ins. : 23°C/54% Engineer : Sunny
EUT : 54M Wireless USB Adapter M/N:TL-WN323G
Power Rating: DC 5V From PC AC 120V/60Hz
Test Mode : IEEE802.11b CH1:2412MHz



No.6 Ke Feng Road,B1;ck 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

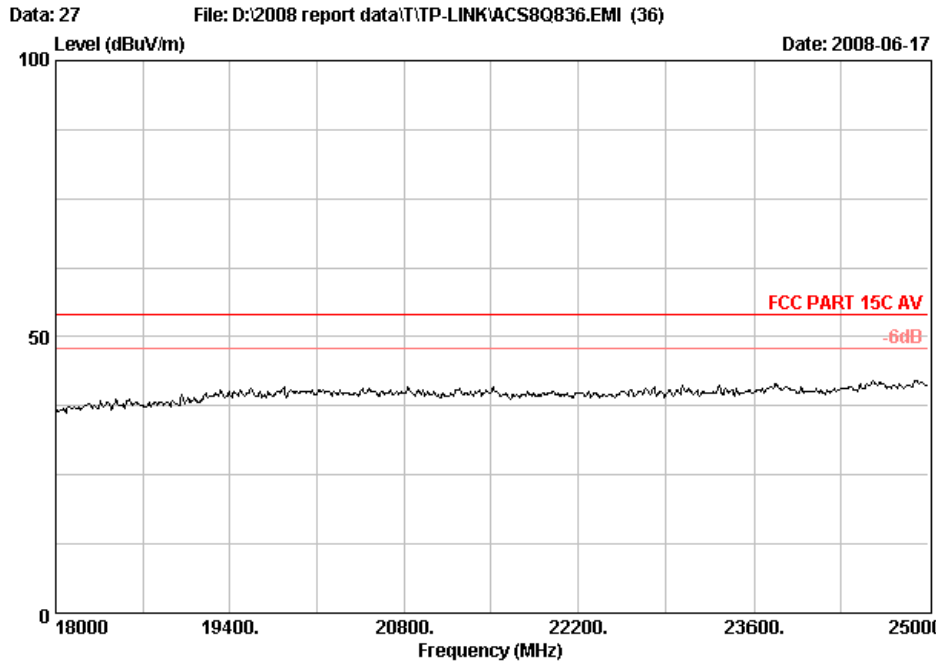


Site no. : RF Chamber Data no. : 27
Dis. / Ant. : 3m 3116 FACTOR Ant. pol. : HORIZONTAL
Limit : FCC PART 15C AV
Env. / Ins. : 23°C/54% Engineer : Sunny
EUT : 54M Wireless USB Adapter M/N:TL-WN323G
Power Rating: DC 5V From PC AC 120V/60Hz
Test Mode : IEEE802.11b CH6:2437MHz

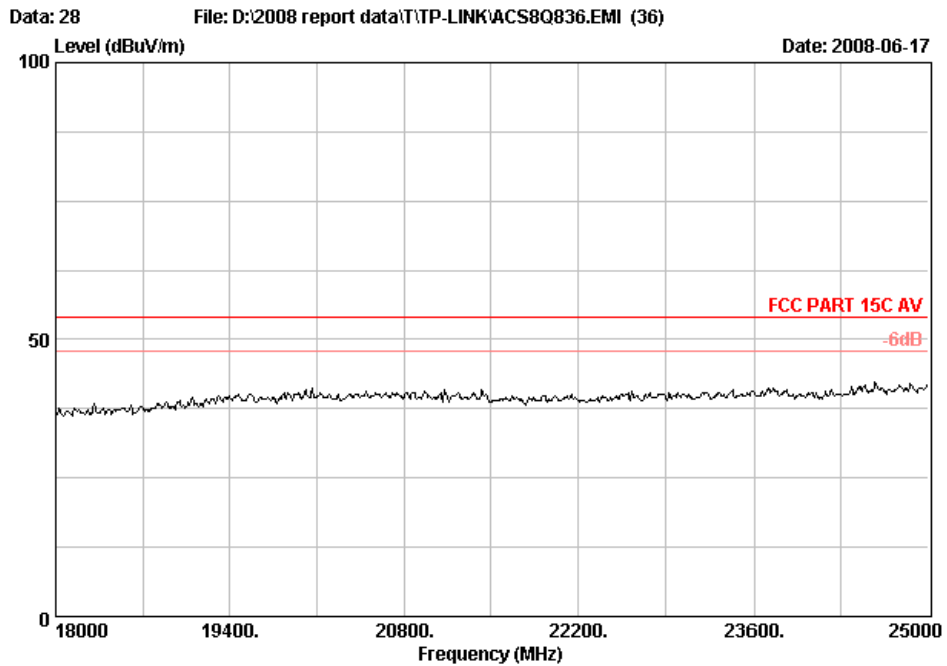


Site no. : RF Chamber Data no. : 28
Dis. / Ant. : 3m 3116 FACTOR Ant. pol. : VERTICAL
Limit : FCC PART 15C AV
Env. / Ins. : 23°C/54% Engineer : Sunny
EUT : 54M Wireless USB Adapter M/N:TL-WN323G
Power Rating: DC 5V From PC AC 120V/60Hz
Test Mode : IEEE802.11b CH6:2437MHz



No.6 Ke Feng Road,B1;ck 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

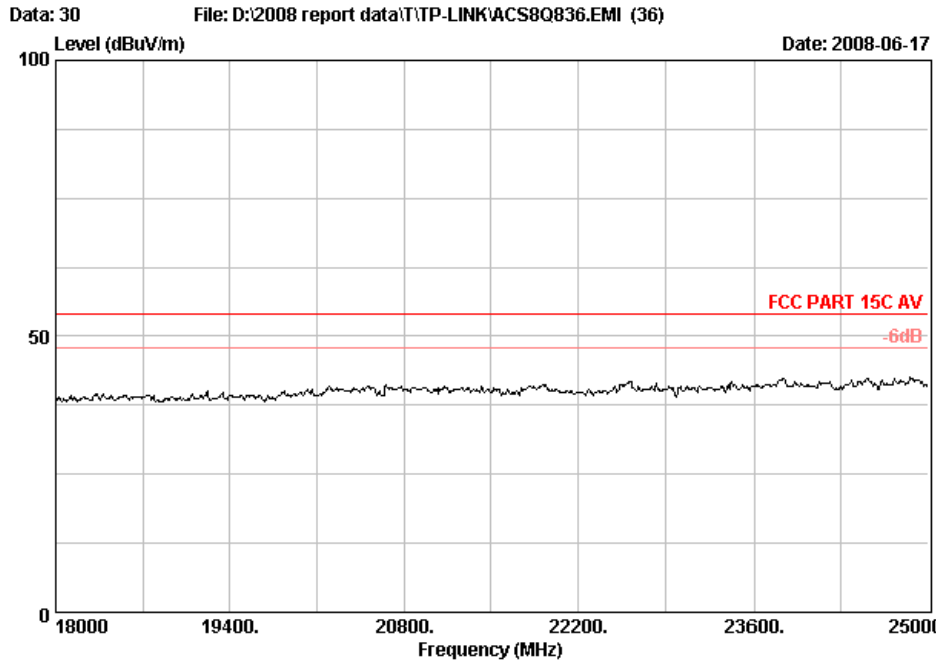


Site no. : RF Chamber Data no. : 30
Dis. / Ant. : 3m 3116 FACTOR Ant. pol. : HORIZONTAL
Limit : FCC PART 15C AV
Env. / Ins. : 23°C/54% Engineer : Sunny
EUT : 54M Wireless USB Adapter M/N:TL-WN323G
Power Rating: DC 5V From PC AC 120V/60Hz
Test Mode : IEEE802.11b CH11:2462MHz

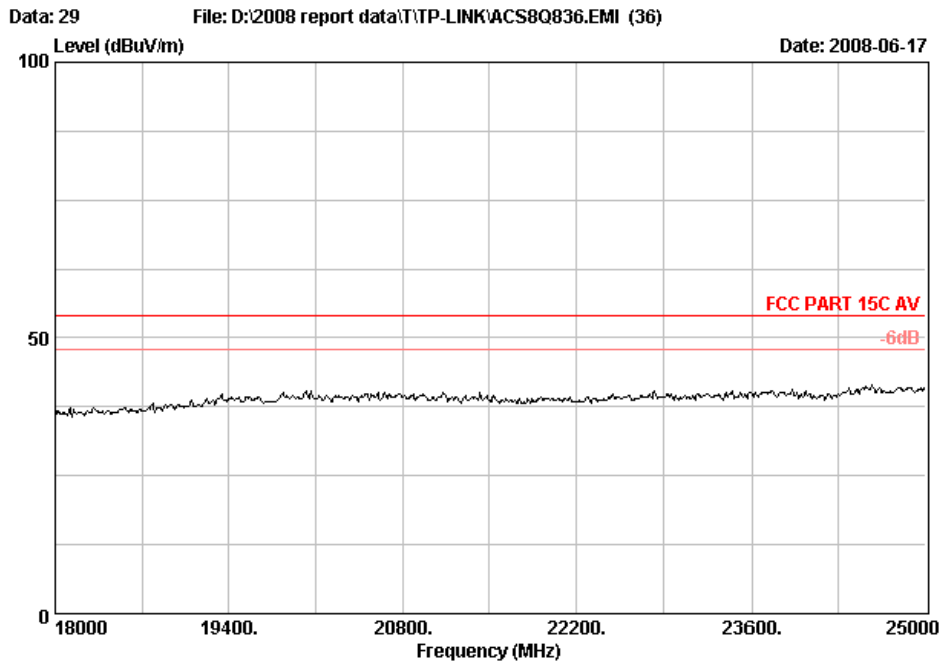


Site no. : RF Chamber Data no. : 29
Dis. / Ant. : 3m 3116 FACTOR Ant. pol. : VERTICAL
Limit : FCC PART 15C AV
Env. / Ins. : 23°C/54% Engineer : Sunny
EUT : 54M Wireless USB Adapter M/N:TL-WN323G
Power Rating: DC 5V From PC AC 120V/60Hz
Test Mode : IEEE802.11b CH11:2462MHz



No.6 Ke Feng Road,B1;ck 52,
ShenZhen Science & Industry Park
Noutou, ShenZhen, GuangDong, China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

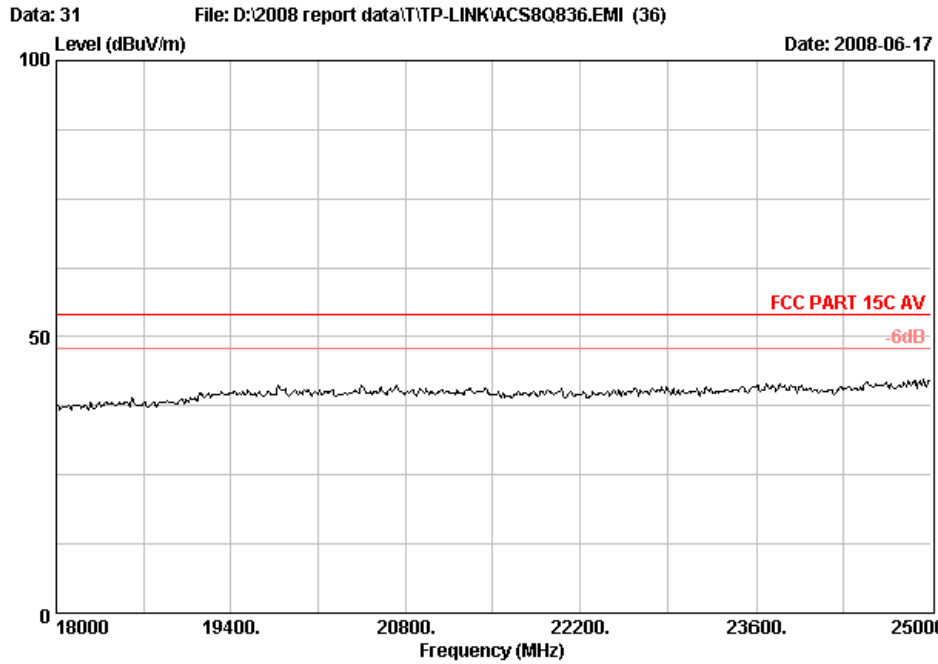


Site no. : RF Chamber Data no. : 31
 Dis. / Ant. : 3m 3116 FACTOR Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Sunny
 EUT : 54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating: DC 5V From PC AC 120V/60Hz
 Test Mode : IEEE802.11g CH1:2412MHz

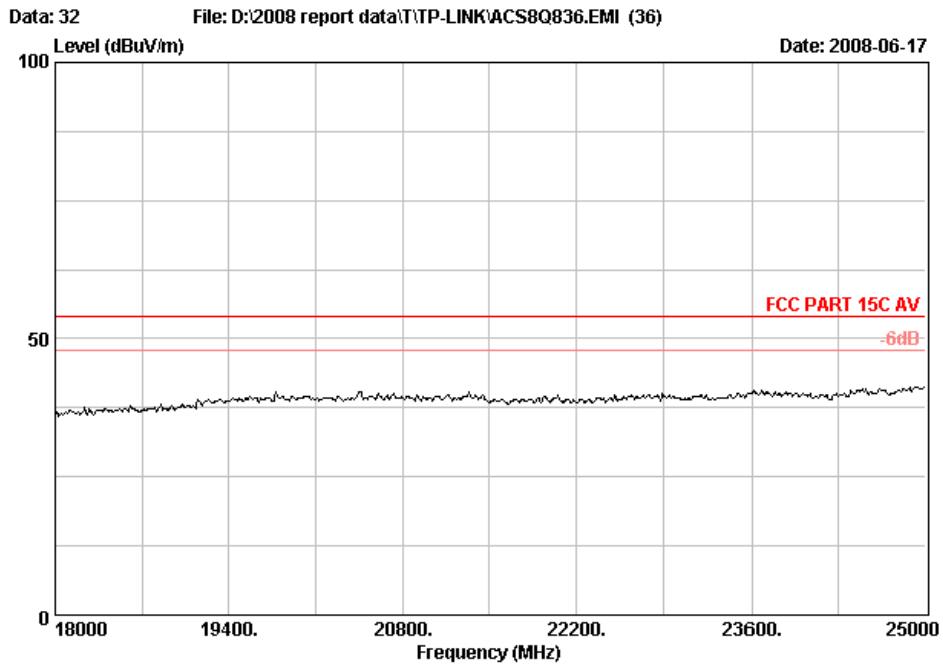


Site no. : RF Chamber Data no. : 32
 Dis. / Ant. : 3m 3116 FACTOR Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Sunny
 EUT : 54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating: DC 5V From PC AC 120V/60Hz
 Test Mode : IEEE802.11g CH1:2412MHz



No.6 Ke Feng Road,B1:ck 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

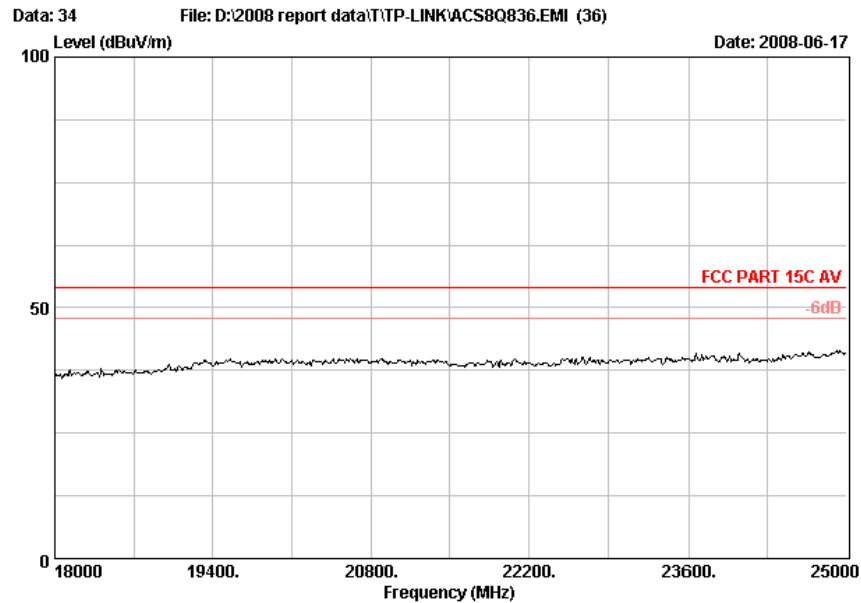


Site no. : RF Chamber Data no. : 34
Dis. / Ant. : 3m 3116 FACTOR Ant. pol. : HORIZONTAL
Limit : FCC PART 15C AV
Env. / Ins. : 23°C/54% Engineer : Sunny
EUT : 54M Wireless USB Adapter M/N:TL-WN323G
Power Rating: DC 5V From PC AC 120V/60Hz
Test Mode : IEEE802.11g CH6:2437MHz

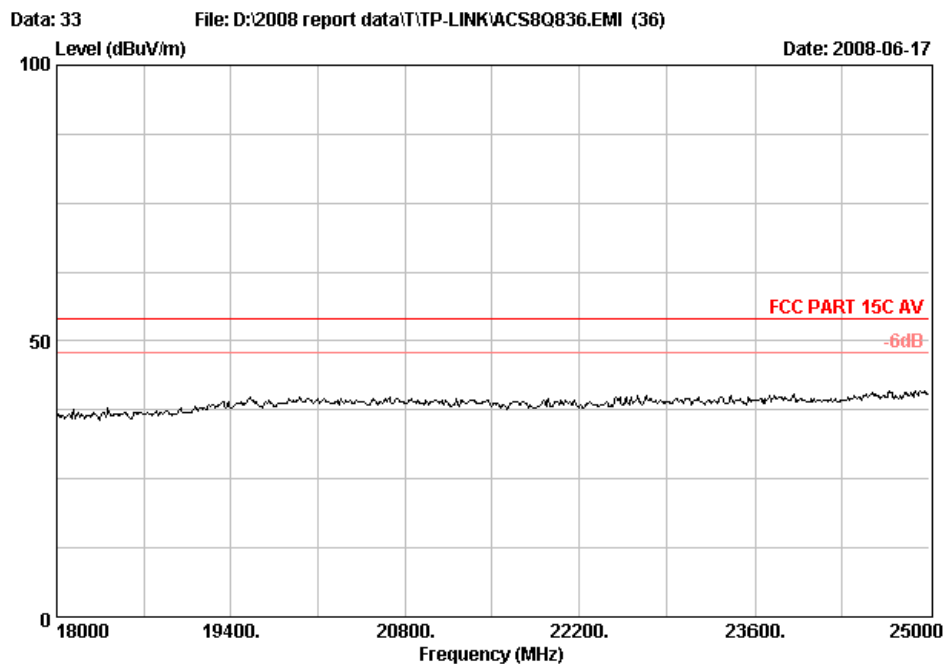


Site no. : RF Chamber Data no. : 33
Dis. / Ant. : 3m 3116 FACTOR Ant. pol. : VERTICAL
Limit : FCC PART 15C AV
Env. / Ins. : 23°C/54% Engineer : Sunny
EUT : 54M Wireless USB Adapter M/N:TL-WN323G
Power Rating: DC 5V From PC AC 120V/60Hz
Test Mode : IEEE802.11g CH6:2437MHz



No.6 Ke Feng Road,B1;ck 52,
ShenZhen Science & Industry Park
Noutou, ShenZhen, GuangDong, China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

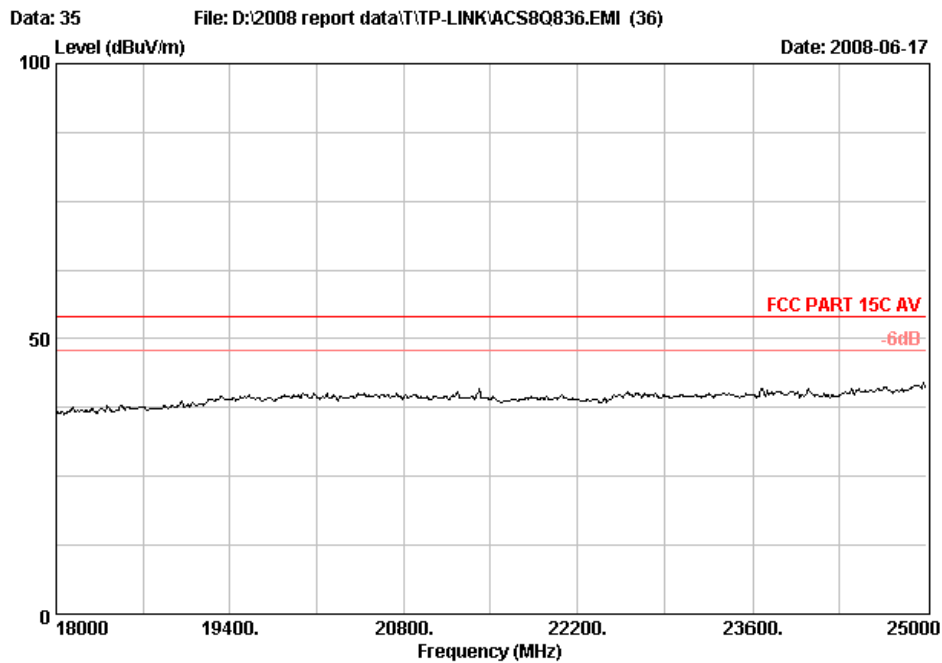

Site no. : RF Chamber Data no. : 35
Dis. / Ant. : 3m 3116 FACTOR Ant. pol. : HORIZONTAL
Limit : FCC PART 15C AV
Env. / Ins. : 23°C/54% Engineer : Sunny
EUT : 54M Wireless USB Adapter M/N:TL-WN323G
Power Rating: DC 5V From PC AC 120V/60Hz
Test Mode : IEEE802.11g CH11:2462MHz


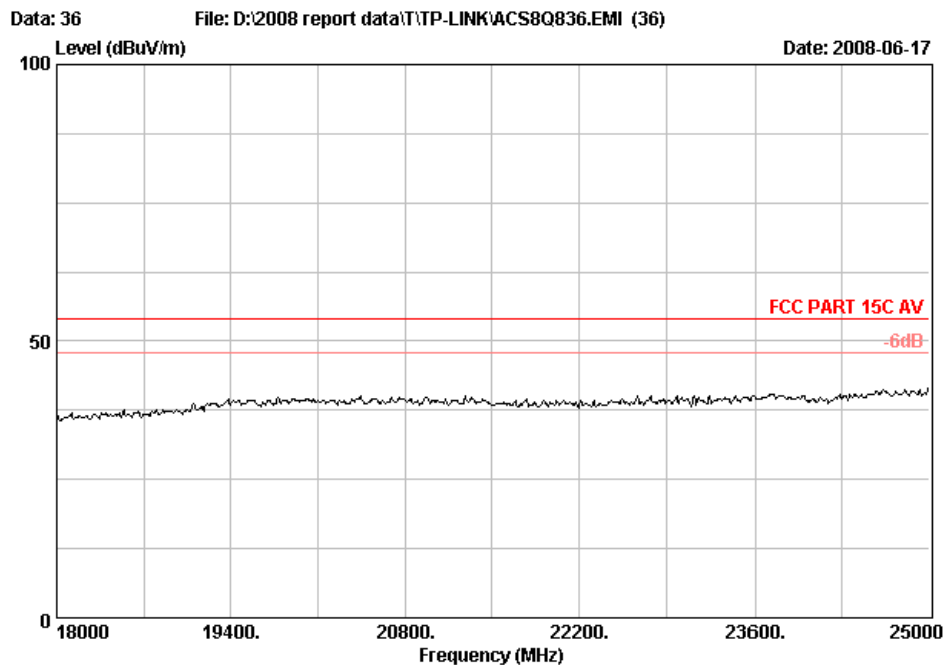


Site no. : RF Chamber Data no. : 36
Dis. / Ant. : 3m 3116 FACTOR Ant. pol. : VERTICAL
Limit : FCC PART 15C AV
Env. / Ins. : 23°C/54% Engineer : Sunny
EUT : 54M Wireless USB Adapter M/N:TL-WN323G
Power Rating: DC 5V From PC AC 120V/60Hz
Test Mode : IEEE802.11g CH11:2462MHz



Conducted emission test data:

Test Mode: IEEE 802.11b TX



Test CH1: 2412MHz

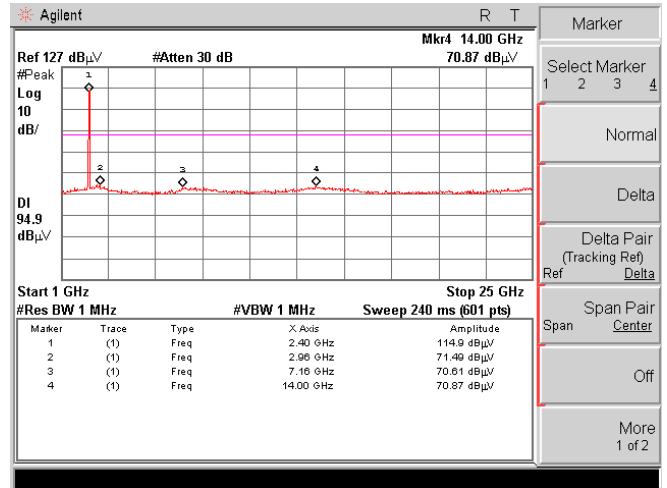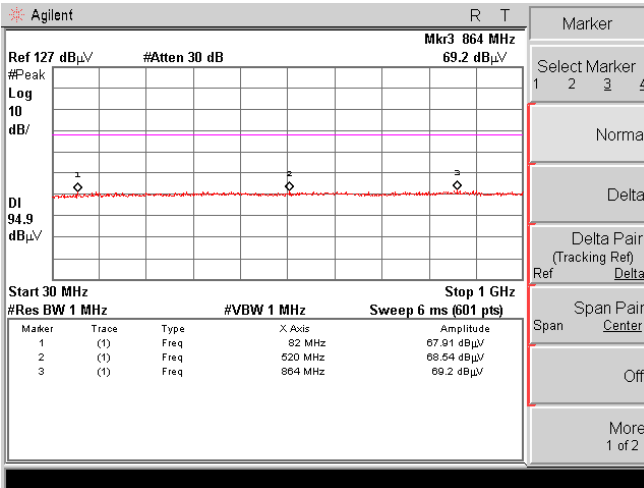



Test CH6: 2437MHz

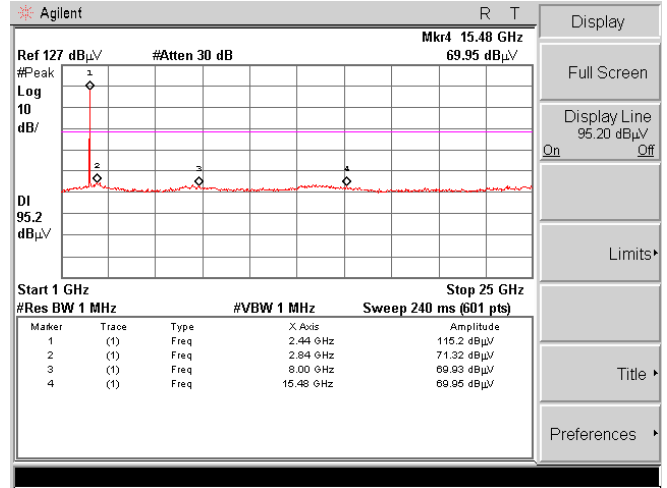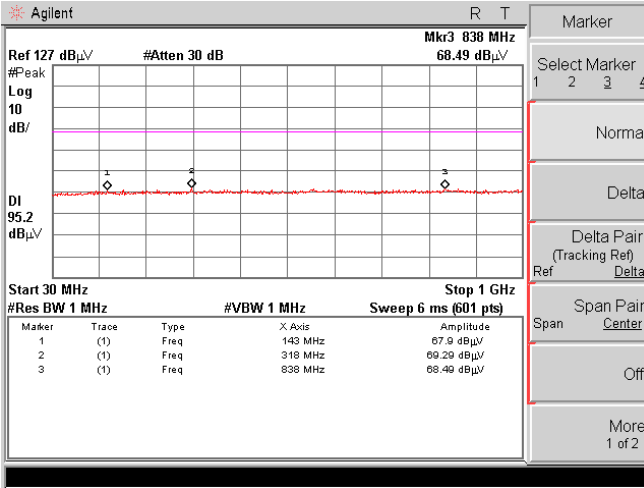



Test CH11: 2462MHz

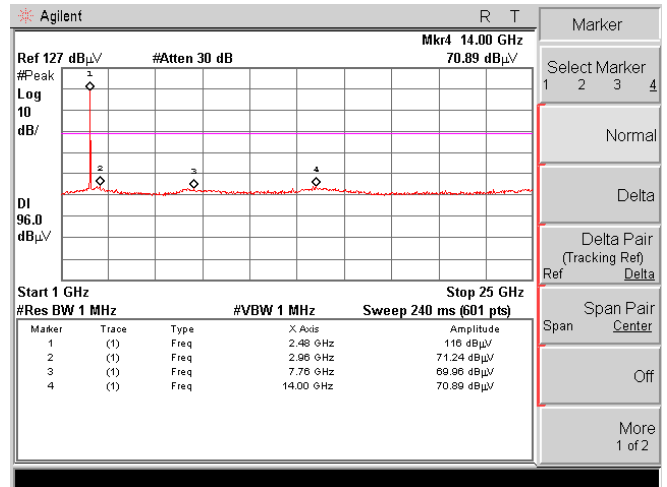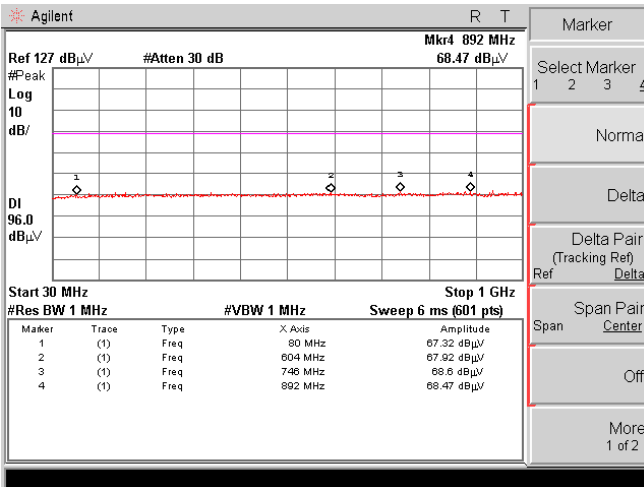



Test Mode: IEEE 802.11g TX
 Test CH1: 2412MHz

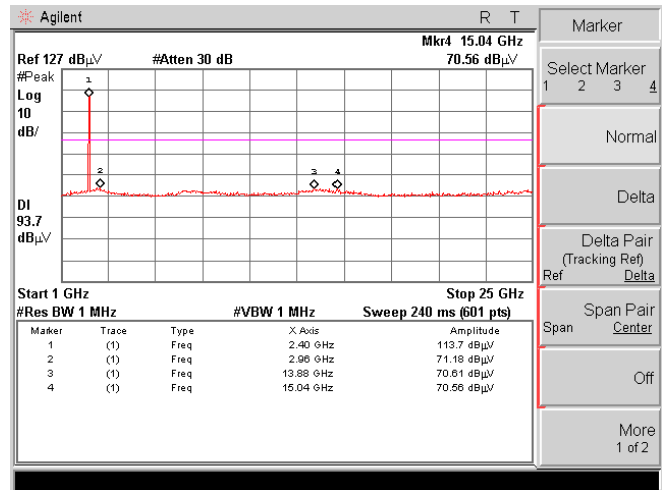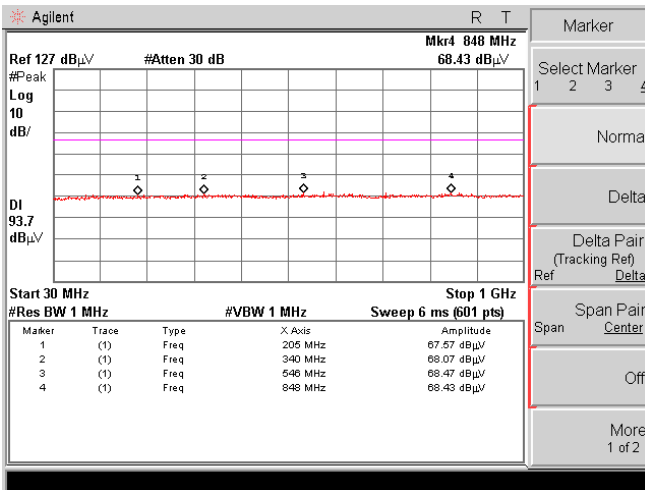

Test CH6: 2437MHz

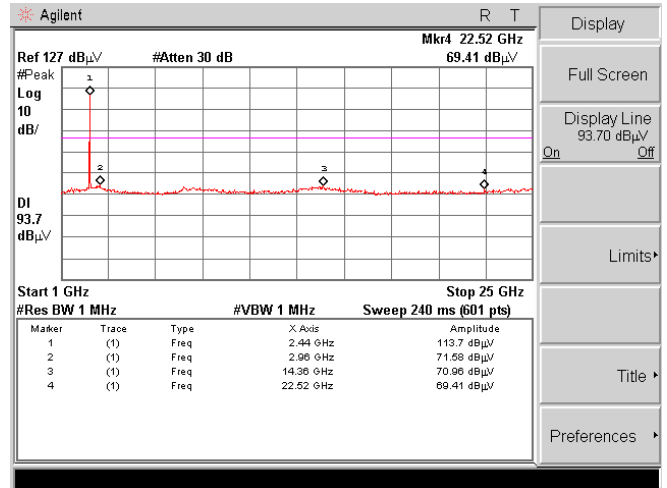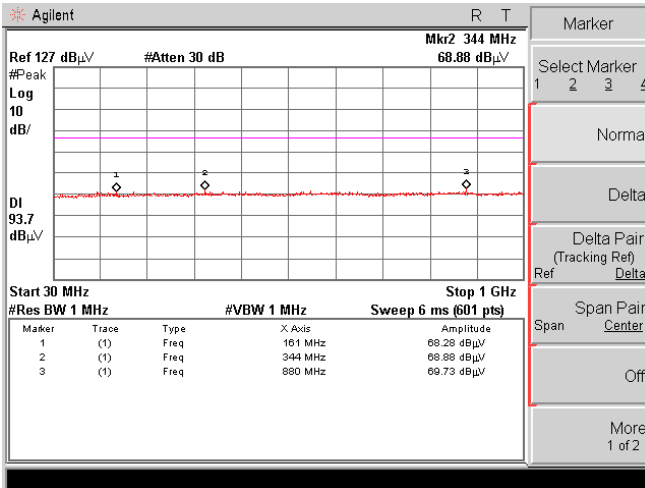

Test CH11: 2462MHz

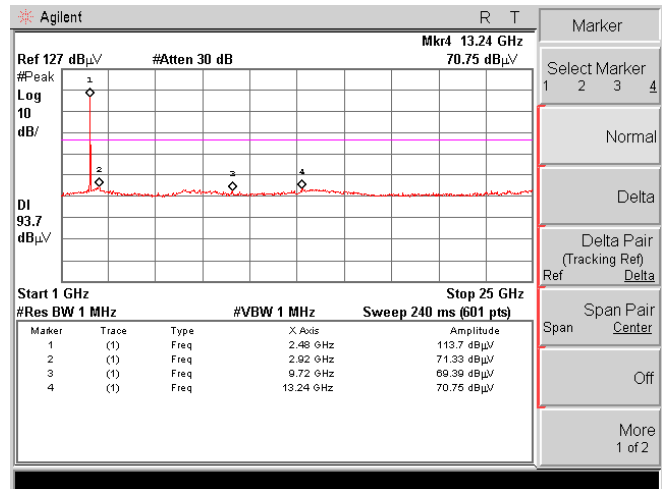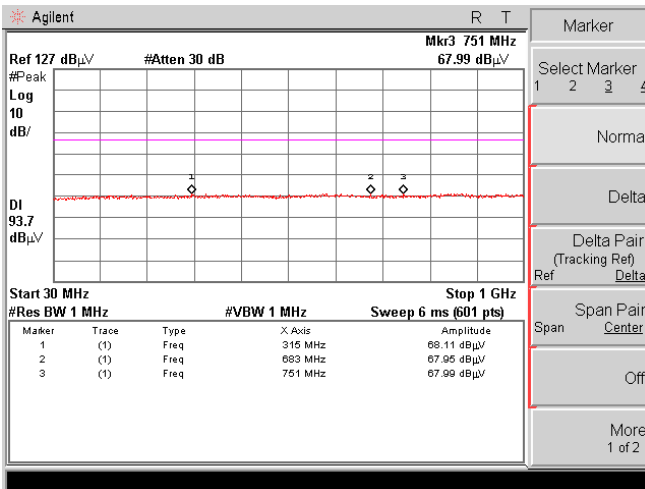

5. 6dB Bandwidth Test

5.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum Analyzer	Agilent	E4446A	US44300459	May,10, 08	1 Year
2	Attenuator	Agilent	8491B	MY39262165	May,28, 08	1 Year
3	Horn Antenna	EMCO	3115	9607-4877	May,27, 08	1.5 Year
4	RF Cable	Hubersuhner	SUCOFLEX 102	2861812	May,28, 08	1Year
5	RF Cable	Hubersuhner	SUCOFLEX 102	28862212	May,28, 08	1 Year

5.2. Test Information

EUT:	54M Wireless USB Adapter
M/N:	TL-WN323G
Test Date:	Jun.20, 2008
Ambient Temperature:	23°C
Relative Humidity:	60%
Test standard:	FCC PART 15C: 15.247
Test mode:	IEEE 802.11b TX / IEEE 802.11g TX
Test Frequency:	11b,11g: CH1: 2412MHz, CH6: 2437MHz, CH11: 2462MHz
Tested By:	Jamy

5.3. Test Procedure

The transmitter output was connected to a spectrum analyzer, The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100 kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

5.4. Test Results

Test Mode: IEEE 802.11b TX


CH	6dB Bandwidth (MHz)	Limit	Conclusion
1	10.08	>500	PASS
6	10.08	>500	PASS
11	10.08	>500	PASS

Test Mode: IEEE 802.11g TX


CH	6dB Bandwidth (MHz)	Limit	Conclusion
1	16.42	>500	PASS
6	16.42	>500	PASS
11	16.50	>500	PASS

Test Mode: IEEE 802.11b TX


Test CH1: 2412MHz

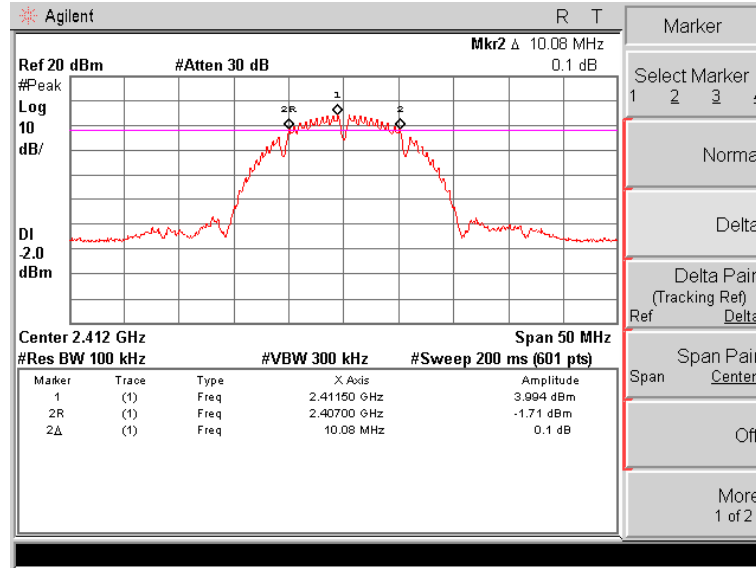

Test CH6: 2437MHz

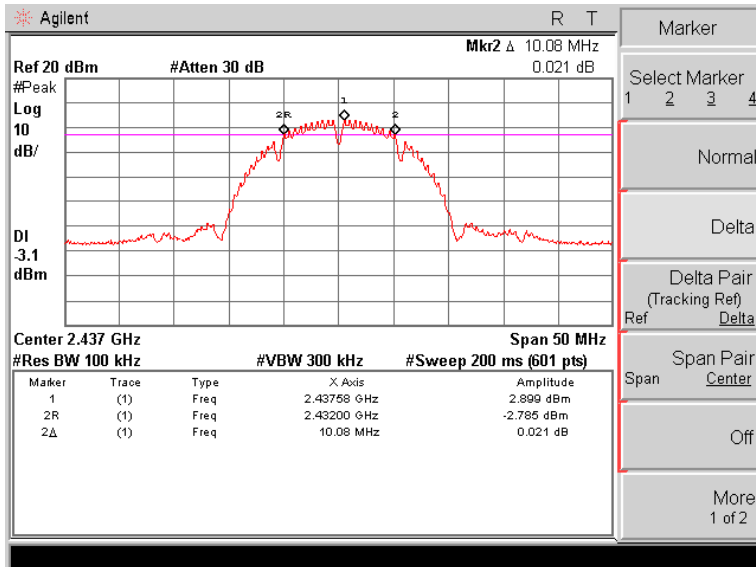


Test CH11: 2462MHz

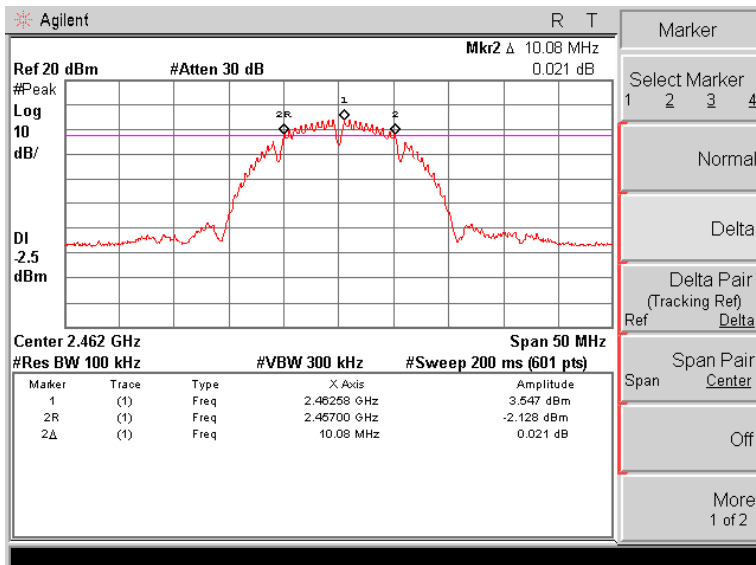


Test Mode: IEEE 802.11g TX


Test CH1: 2412MHz

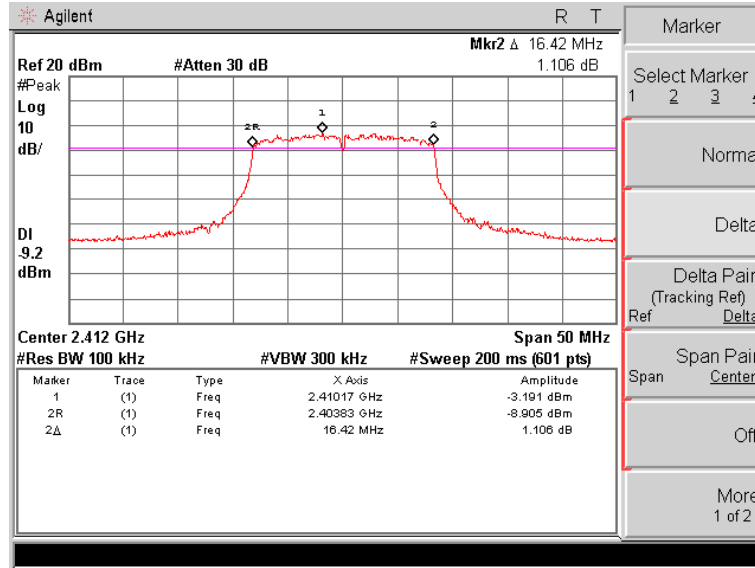

Test CH6: 2437MHz

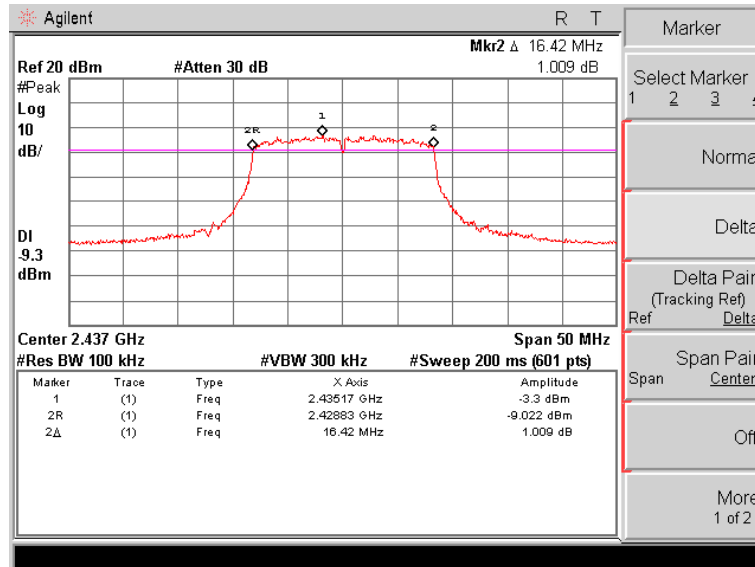

Test CH11: 2462MHz

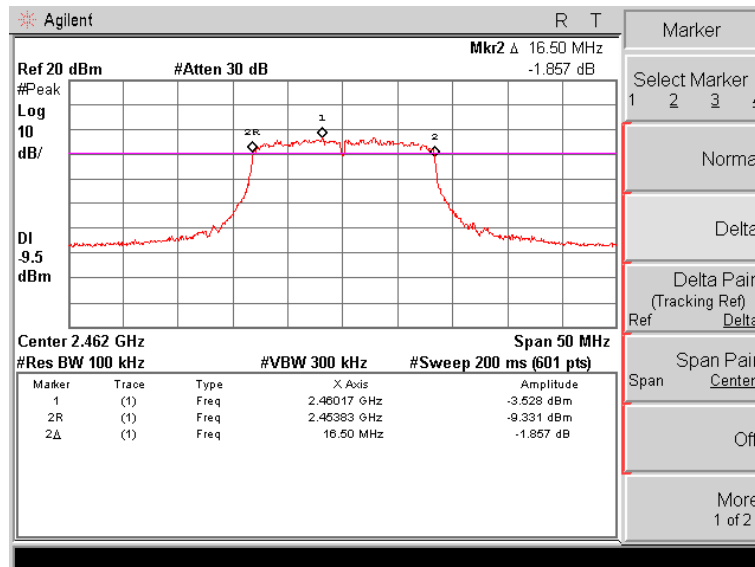

6. OUTPUT POWER TEST

6.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum Analyzer	Agilent	E4446A	US44300459	May,10, 08	1 Year
2	Attenuator	Agilent	8491B	MY39262165	May,28, 08	1 Year
3	Power sensor	Anritsu	MA2491A	032516	May,10, 08	1 Year
4	Power meter	Anritsu	ML2487A	6K00002472	May,10, 08	1 Year
5	RF Cable	Hubersuhner	SUCOFLEX 102	2861812	May,28, 08	1Year
6	RF Cable	Hubersuhner	SUCOFLEX 102	28862212	May,28, 08	1 Year

6.2. Test Procedure

The transmitter output was connected to a power meter, use the power meter to read out the peak out put power.

6.3. Test Results

EUT: 54M Wireless USB Adapter				M/N: TL-WN323G		
Power: DC 5V From PC AC 120V/60Hz						
Ambient Temperature:24°C			Relative Humidity: 59%			
Test date: 2008/06/17		Test site: RF site		Tested By: Sunny		
Test data rate: IEEE802.11b 1Mbps; IEEE802.11g: 6Mbps (see note1)						
Test CH:	CH1: 2412MHz CH6: 2437MHz CH11: 2462MHz					
Mode	CH	Peak read (dBm)	Cable loss (dBm)	Result (dBm)	Limit (dBm)	Conclusion
11b	CH1	18.92	0.6	19.52	30.0	PASS
	CH6	18.13	0.6	18.73	30.0	PASS
	CH11	18.63	0.6	19.23	30.0	PASS
11g	CH1	21.24	0.6	21.84	30.0	PASS
	CH6	21.32	0.6	21.92	30.0	PASS
	CH11	21.04	0.6	21.64	30.0	PASS
Note1: According Exploratory test, These data rate have the maximum output power						
Note2: Result=Read+ cable loss						

7. BAND EDGE COMPLIANCE TEST

7.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum Analyzer	Agilent	E4446A	US44300459	May,10, 08	1 Year
2	Horn Antenna	EMCO	3115	9607-4877	May,27, 08	1.5 Year
3	Amplifier	HP	8449B	3008A00863	May,10, 08	1 Year
4	RF Cable	Hubersuhner	SUCOFLEX	182769/4	May,28, 08	1 Year
5	RF Cable	Hubersuhner	SUCOFLEX	182768/4	May,28, 08	1 Year
6	RF Cable	Hubersuhner	SUCOFLEX	182771/4	May,28, 08	1 Year

7.2. Limit

According to §15.247(c), in any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

7.3. Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper-band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO


7.4. Test Results

Pass (The testing data was attached in the next pages.)



No.6 Ke Feng Road,Block 52,
Shenzhen Science & Industry Park
Noutou, Shenzhen, Guangdong, China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 37 File: D:\2008 report data\T\TP-LINK\ACS8Q836.EMI (52)

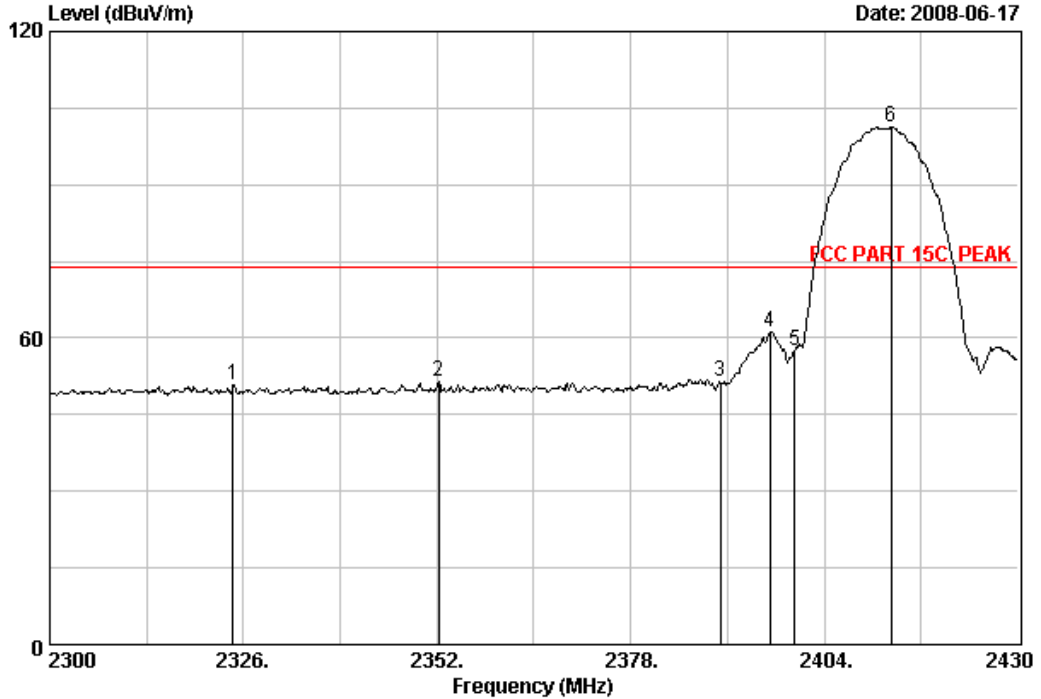

Site no. : RF Chamber Data no. : 37
 Dis. / Ant. : 3m 3115 FACTOR Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Sunny
 EUT : 54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating: DC 5V From PC AC 120V/60Hz
 Test Mode : IEEE802.11b CH1:2412MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2324.57	28.83	6.65	35.20	50.69	50.97	74.00	23.03	Peak
2	2352.26	28.91	6.67	35.19	50.92	51.31	74.00	22.69	Peak
3	2390.00	28.99	6.71	35.18	50.84	51.36	74.00	22.64	Peak
4	2396.72	28.99	6.73	35.18	60.61	61.15	74.00	12.85	Peak
5	2400.00	28.99	6.73	35.18	57.05	57.59	74.00	16.41	Peak
6	2412.97	29.03	6.77	35.17	100.69	101.32	74.00	-27.32	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou, ShenZhen, GuangDong, China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 38 File: D:\2008 report data\T\TP-LINK\ACS8Q836.EMI (52)

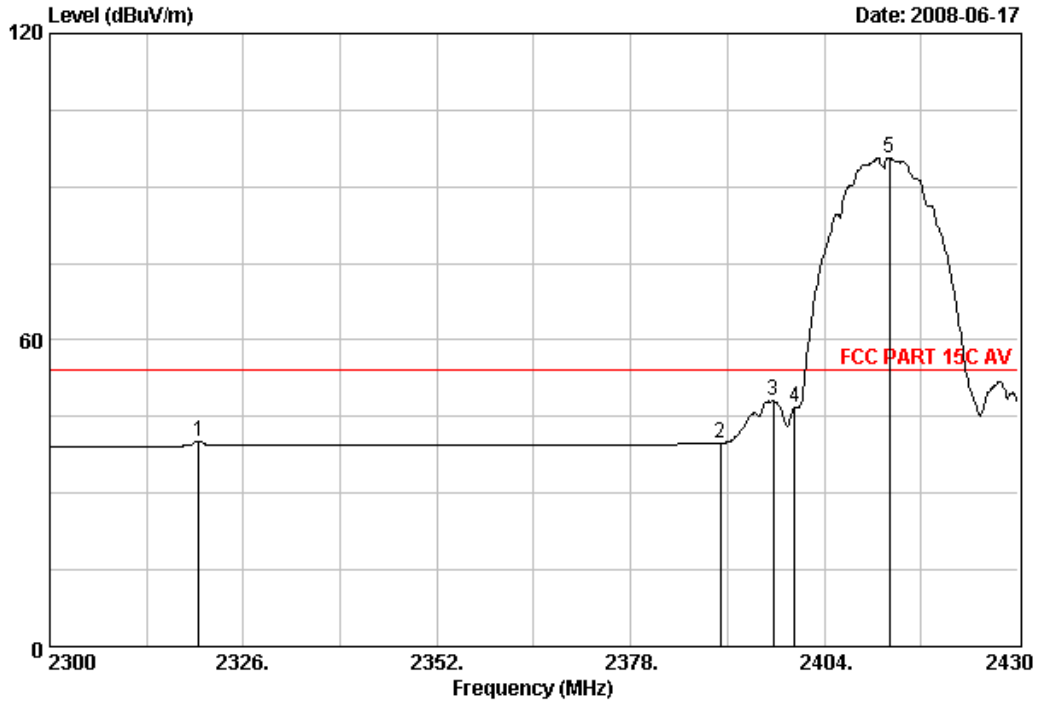

Site no. : RF Chamber Data no. : 38
 Dis. / Ant. : 3m 3115 FACTOR Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Sunny
 EUT : 54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating: DC 5V From PC AC 120V/60Hz
 Test Mode : IEEE802.11b CH1:2412MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission				
					Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2320.02	28.83	6.65	35.20	39.84	40.12	54.00	13.88	Average
2	2390.00	28.99	6.71	35.18	39.16	39.68	54.00	14.32	Average
3	2397.11	28.99	6.73	35.18	47.45	47.99	54.00	6.01	Average
4	2400.00	28.99	6.73	35.18	46.20	46.74	54.00	7.26	Average
5	2412.71	29.03	6.77	35.17	95.11	95.74	54.00	-41.74	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou, ShenZhen, GuangDong, China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 39 File: D:\2008 report data\T\TP-LINK\ACS8Q836.EMI (52)

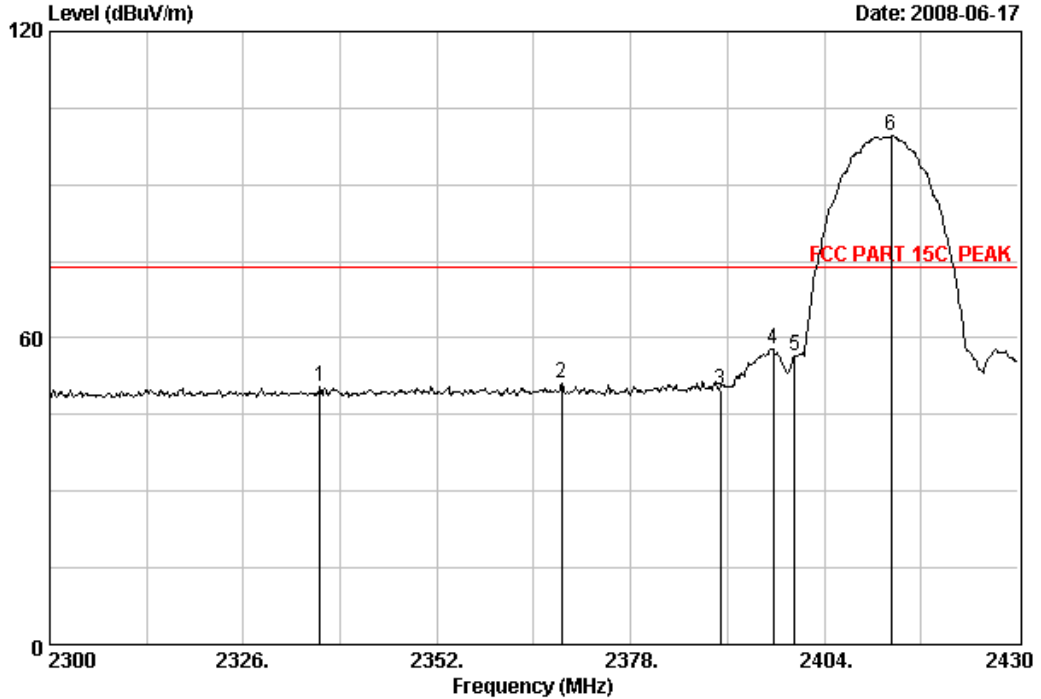

Site no. : RF Chamber Data no. : 39
 Dis. / Ant. : 3m 3115 FACTOR Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Sunny
 EUT : 54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating: DC 5V From PC AC 120V/60Hz
 Test Mode : IEEE802.11b CH1:2412MHz


Peak	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission		Limits (dBUV/m)	Margin (dB)	Remark
					Reading (dBUV)	Level (dBUV/m)			
1	2336.27	28.87	6.65	35.20	50.00	50.32	74.00	23.68	Peak
2	2368.77	28.95	6.69	35.19	50.70	51.15	74.00	22.85	Peak
3	2390.00	28.99	6.71	35.18	49.22	49.74	74.00	24.26	Peak
4	2397.11	28.99	6.73	35.18	57.17	57.71	74.00	16.29	Peak
5	2400.00	28.99	6.73	35.18	56.11	56.65	74.00	17.35	Peak
6	2412.97	29.03	6.77	35.17	98.95	99.58	74.00	-25.58	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou, ShenZhen, GuangDong, China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 40 File: D:\2008 report data\T\TP-LINK\ACS8Q836.EMI (52)

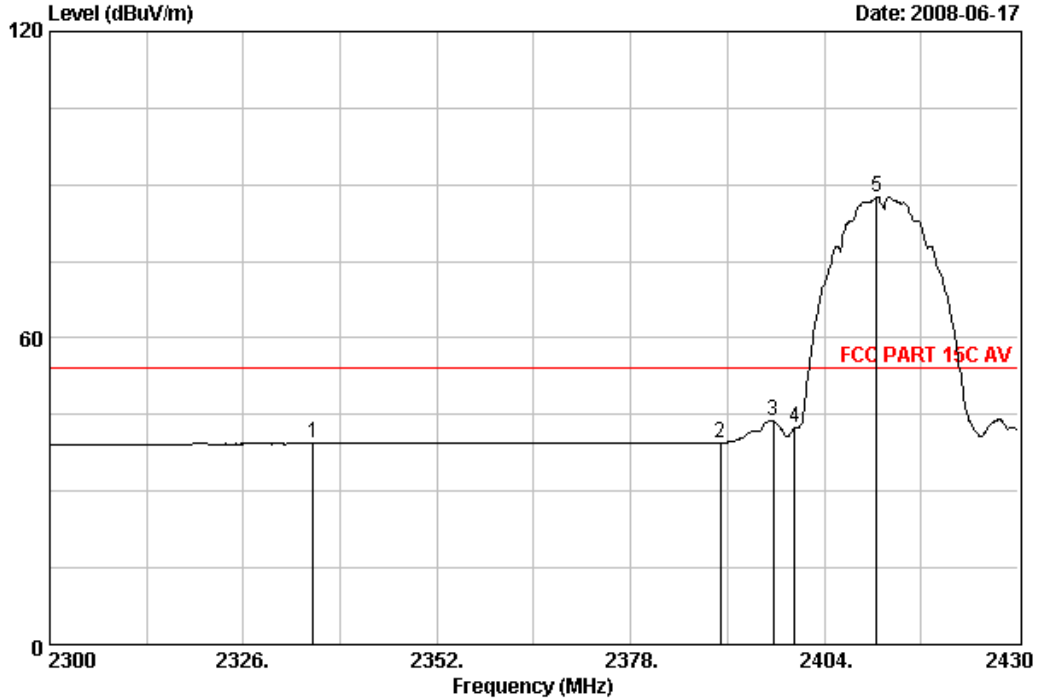

Site no. : RF Chamber Data no. : 40
 Dis. / Ant. : 3m 3115 FACTOR Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Sunny
 EUT : 54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating: DC 5V From PC AC 120V/60Hz
 Test Mode : IEEE802.11b CH1:2412MHz

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
					Reading (dBuV)	Level (dBuV/m)			
1	2335.36	28.87	6.65	35.20	39.05	39.37	54.00	14.63	Average
2	2390.00	28.99	6.71	35.18	38.96	39.48	54.00	14.52	Average
3	2397.11	28.99	6.73	35.18	43.15	43.69	54.00	10.31	Average
4	2400.00	28.99	6.73	35.18	41.92	42.46	54.00	11.54	Average
5	2411.02	29.03	6.73	35.18	87.09	87.67	54.00	-33.67	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou, ShenZhen, GuangDong, China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 41 File: D:\2008 report data\T\TP-LINK\ACS8Q836.EMI (52)

Date: 2008-06-17

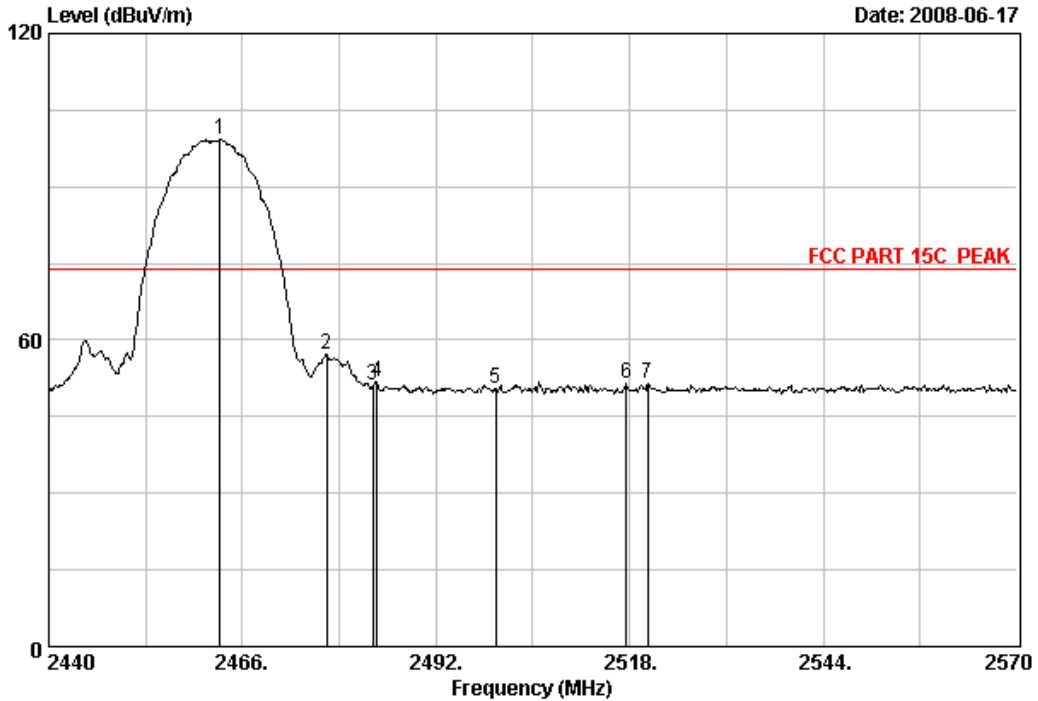

Site no. : RF Chamber Data no. : 41
 Dis. / Ant. : 3m 3115 FACTOR Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Sunny
 EUT : 54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating: DC 5V From PC AC 120V/60Hz
 Test Mode : IEEE802.11b CH11:2462MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2463.01	29.15	6.84	35.16	98.44	99.27	74.00	-25.27	Peak
2	2477.31	29.19	6.87	35.16	56.33	57.23	74.00	16.77	Peak
3	2483.50	29.19	6.87	35.16	50.26	51.16	74.00	22.84	Peak
4	2484.07	29.19	6.87	35.16	50.99	51.89	74.00	22.11	Peak
5	2500.00	29.23	6.91	35.15	49.53	50.52	74.00	23.48	Peak
6	2517.61	29.29	6.93	35.14	50.44	51.52	74.00	22.48	Peak
7	2520.47	29.29	6.93	35.14	50.44	51.52	74.00	22.48	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,B1:ck 52,
 ShenZhen Science & Industry Park
 Noutou,ShenZhen,GuangDong,China
 Tel:+86-755-26639495-7
 Fax:+86-755-26632877
 Postcode:518057

Data: 42 File: D:\2008 report data\T\TP-LINK\ACS8Q836.EMI (52)

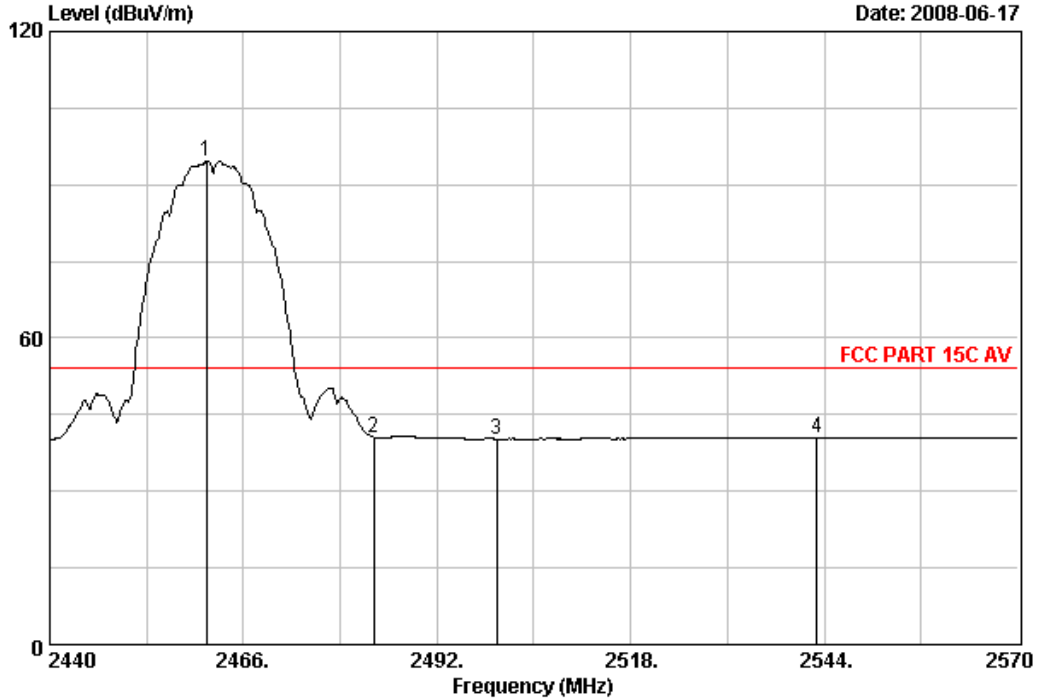

Site no. : RF Chamber Data no. : 42
 Dis. / Ant. : 3m 3115 FACTOR Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Sunny
 EUT : 54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating: DC 5V From PC AC 120V/60Hz
 Test Mode : IEEE802.11b CH11:2462MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission				
					Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2461.06	29.15	6.84	35.17	93.93	94.75	54.00	-40.75	Average
2	2483.50	29.19	6.87	35.16	39.71	40.61	54.00	13.39	Average
3	2500.00	29.23	6.91	35.15	39.27	40.26	54.00	13.74	Average
4	2542.96	29.41	6.96	35.13	39.18	40.42	54.00	13.58	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou, ShenZhen, GuangDong, China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 43 File: D:\2008 report data\T\TP-LINK\ACS8Q836.EMI (52)

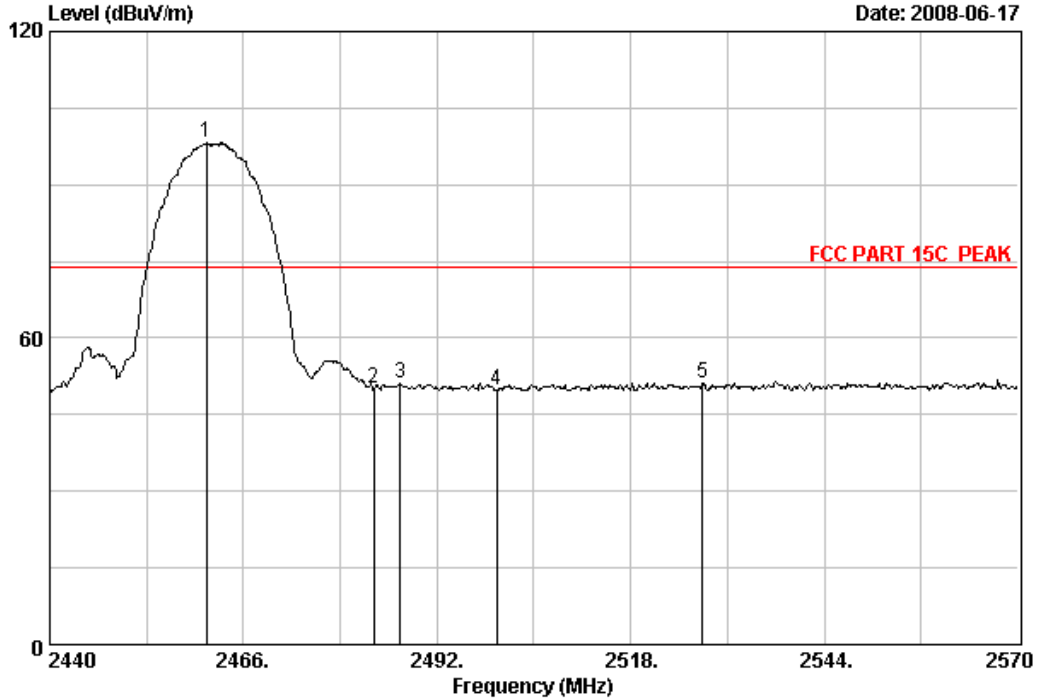

Site no. : RF Chamber Data no. : 43
 Dis. / Ant. : 3m 3115 FACTOR Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Sunny
 EUT : 54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating: DC 5V From PC AC 120V/60Hz
 Test Mode : IEEE802.11b CH11:2462MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission				
					Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2461.06	29.15	6.84	35.17	97.34	98.16	74.00	-24.16	Peak
2	2483.50	29.19	6.87	35.16	49.28	50.18	74.00	23.82	Peak
3	2487.06	29.19	6.87	35.16	50.21	51.11	74.00	22.89	Peak
4	2500.00	29.23	6.91	35.15	48.72	49.71	74.00	24.29	Peak
5	2527.62	29.35	6.96	35.14	50.08	51.25	74.00	22.75	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,B1:ck 52,
ShenZhen Science & Industry Park
Noutou,ShenZhen,GuangDong,China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 44 File: D:\2008 report data\T\TP-LINK\ACS8Q836.EMI (52)

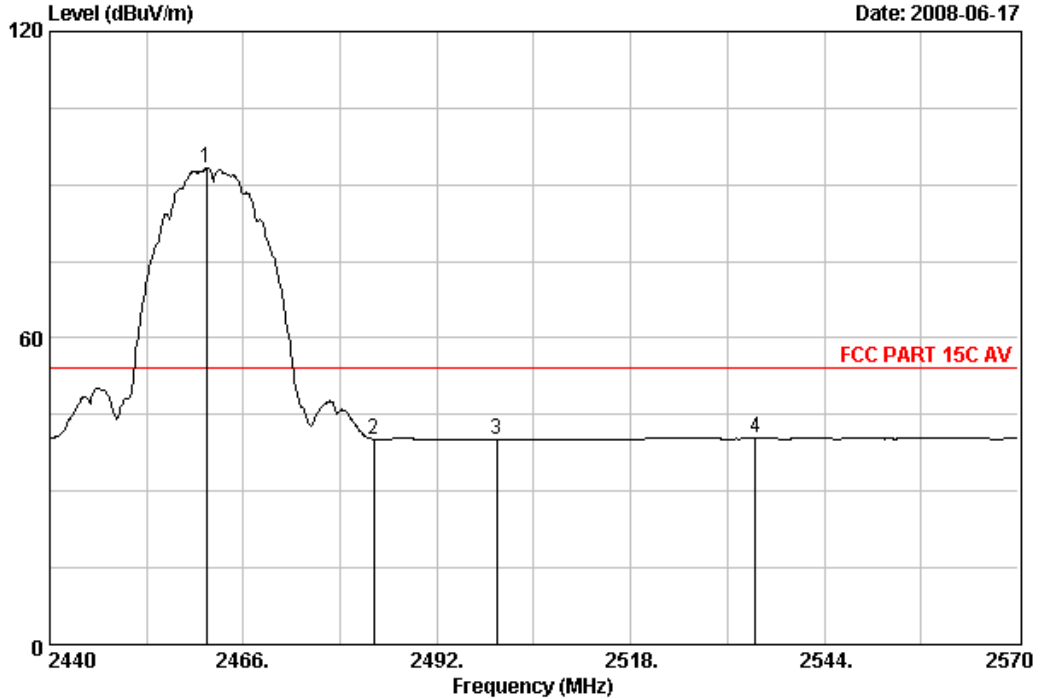

Site no. : RF Chamber Data no. : 44
 Dis. / Ant. : 3m 3115 FACTOR Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Sunny
 EUT : 54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating: DC 5V From PC AC 120V/60Hz
 Test Mode : IEEE802.11b CH11:2462MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission				
					Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2461.06	29.15	6.84	35.17	92.43	93.25	54.00	-39.25	Average
2	2483.50	29.19	6.87	35.16	39.32	40.22	54.00	13.78	Average
3	2500.00	29.23	6.91	35.15	39.16	40.15	54.00	13.85	Average
4	2534.77	29.35	6.96	35.14	39.17	40.34	54.00	13.66	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,
Shenzhen Science & Industry Park
Noutou, Shenzhen, Guangdong, China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 45 File: D:\2008 report data\T\TP-LINK\ACS8Q836.EMI (52)

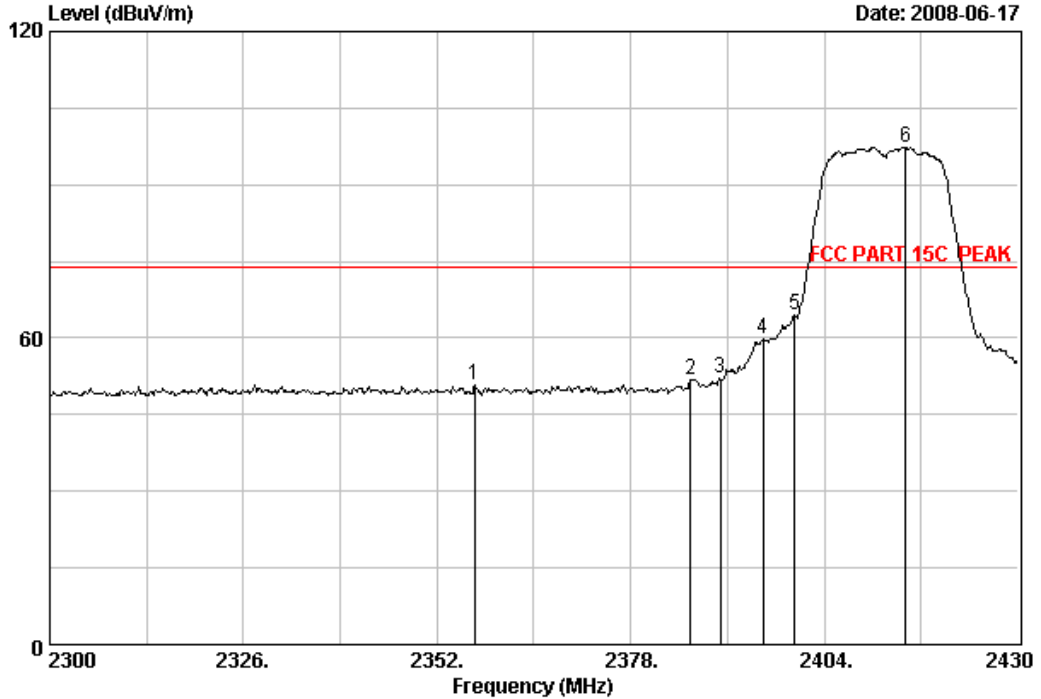

Site no. : RF Chamber Data no. : 45
 Dis. / Ant. : 3m 3115 FACTOR Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Sunny
 EUT : 54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating: DC 5V From PC AC 120V/60Hz
 Test Mode : IEEE802.11g CH1:2412MHz


Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
				Reading (dBuV)	Level (dBuV/m)			
1	28.91	6.69	35.19	50.51	50.92	74.00	23.08	Peak
2	28.99	6.71	35.19	51.46	51.97	74.00	22.03	Peak
3	28.99	6.71	35.18	51.64	52.16	74.00	21.84	Peak
4	28.99	6.73	35.18	59.26	59.80	74.00	14.20	Peak
5	28.99	6.73	35.18	64.00	64.54	74.00	9.46	Peak
6	29.03	6.77	35.17	96.77	97.40	74.00	-23.40	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou, ShenZhen, GuangDong, China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 46 File: D:\2008 report data\T\TP-LINK\ACS8Q836.EMI (52)

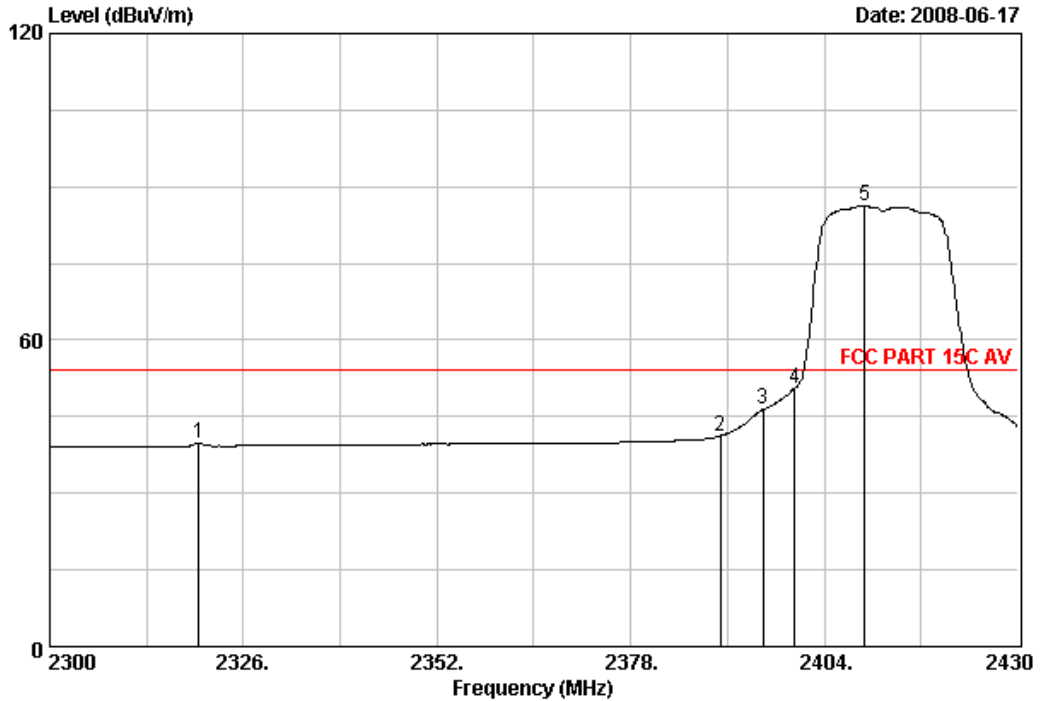

Site no. : RF Chamber Data no. : 46
 Dis. / Ant. : 3m 3115 FACTOR Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Sunny
 EUT : 54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating: DC 5V From PC AC 120V/60Hz
 Test Mode : IEEE802.11g CH1:2412MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
					Reading (dBuV)	Level (dBuV/m)			
1	2320.02	28.83	6.65	35.20	39.50	39.78	54.00	14.22	Average
2	2390.00	28.99	6.71	35.18	40.69	41.21	54.00	12.79	Average
3	2395.81	28.99	6.73	35.18	45.89	46.43	54.00	7.57	Average
4	2400.00	28.99	6.73	35.18	50.10	50.64	54.00	3.36	Average
5	2409.46	29.03	6.73	35.18	85.59	86.17	54.00	-32.17	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou, ShenZhen, GuangDong, China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 47 File: D:\2008 report data\T\TP-LINK\ACS8Q836.EMI (52)

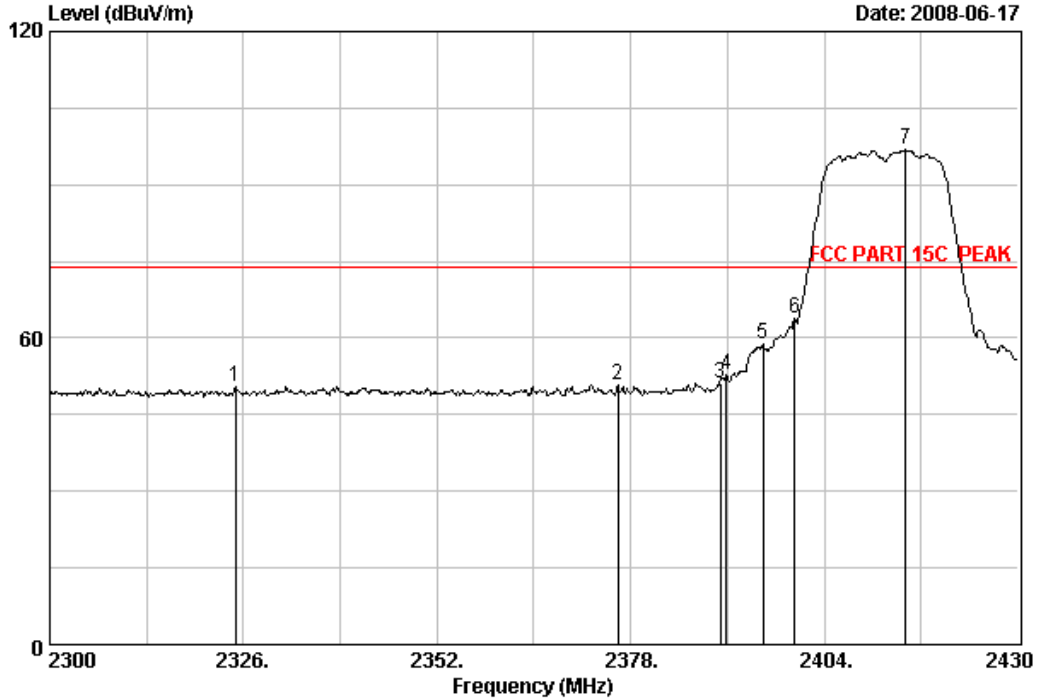

Site no. : RF Chamber Data no. : 47
 Dis. / Ant. : 3m 3115 FACTOR Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Sunny
 EUT : 54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating: DC 5V From PC AC 120V/60Hz
 Test Mode : IEEE802.11g CH1:2412MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission				
					Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2324.96	28.83	6.65	35.20	50.03	50.31	74.00	23.69	Peak
2	2376.31	28.95	6.71	35.19	50.27	50.74	74.00	23.26	Peak
3	2390.00	28.99	6.71	35.18	50.65	51.17	74.00	22.83	Peak
4	2390.87	28.99	6.71	35.18	52.34	52.86	74.00	21.14	Peak
5	2395.81	28.99	6.73	35.18	58.29	58.83	74.00	15.17	Peak
6	2400.00	28.99	6.73	35.18	63.32	63.86	74.00	10.14	Peak
7	2414.92	29.03	6.77	35.17	96.14	96.77	74.00	-22.77	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,
Shenzhen Science & Industry Park
Noutou, Shenzhen, Guangdong, China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 48 File: D:\2008 report data\T\TP-LINK\ACS8Q836.EMI (52)

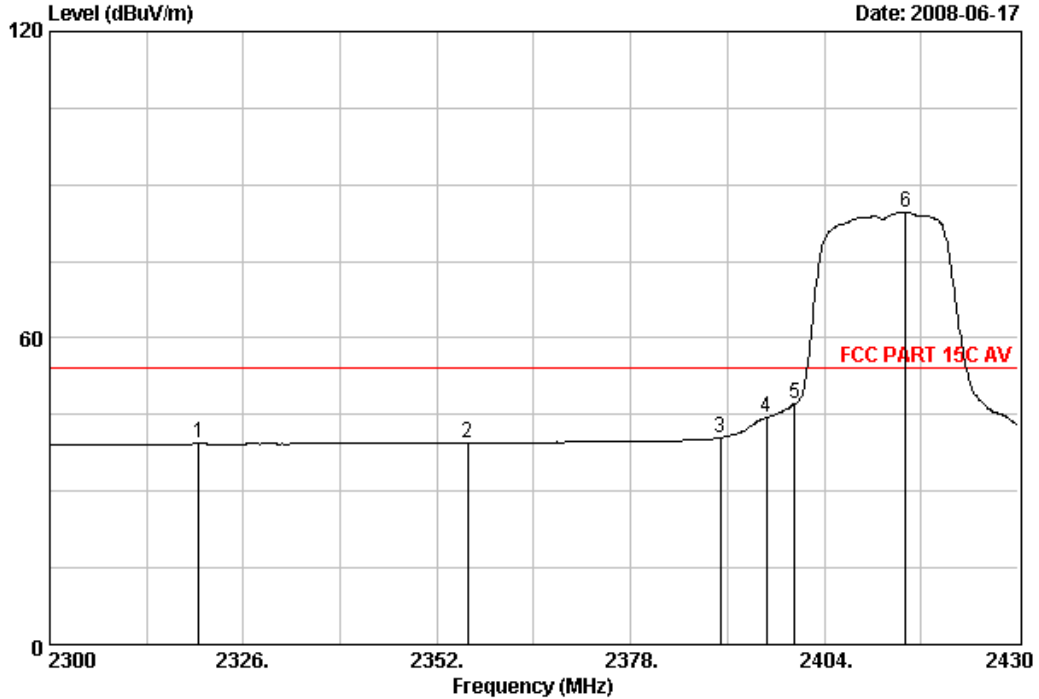

Site no. : RF Chamber Data no. : 48
 Dis. / Ant. : 3m 3115 FACTOR Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Sunny
 EUT : 54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating: DC 5V From PC AC 120V/60Hz
 Test Mode : IEEE802.11g CH1:2412MHz


Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission			Margin (dB)	Remark	
				Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)			
1	2320.02	28.83	6.65	35.20	39.18	39.46	54.00	14.54	Average
2	2356.16	28.91	6.69	35.19	39.06	39.47	54.00	14.53	Average
3	2390.00	28.99	6.71	35.18	39.97	40.49	54.00	13.51	Average
4	2396.20	28.99	6.73	35.18	43.87	44.41	54.00	9.59	Average
5	2400.00	28.99	6.73	35.18	46.61	47.15	54.00	6.85	Average
6	2414.92	29.03	6.77	35.17	83.98	84.61	54.00	-30.61	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,
ShenZhen Science & Industry Park
Noutou, ShenZhen, GuangDong, China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 49 File: D:\2008 report data\T\TP-LINK\ACS8Q836.EMI (52)

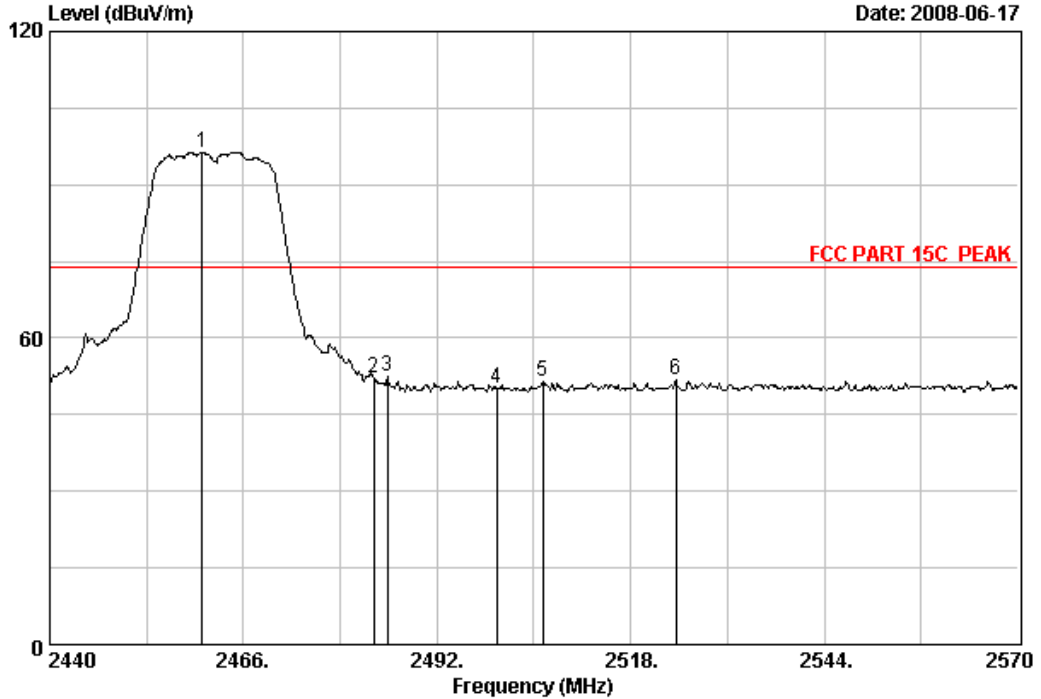

Site no. : RF Chamber Data no. : 49
 Dis. / Ant. : 3m 3115 FACTOR Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Sunny
 EUT : 54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating: DC 5V From PC AC 120V/60Hz
 Test Mode : IEEE802.11g CH11:2462MHz


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
					Reading (dBuV)	Level (dBuV/m)			
1	2460.41	29.15	6.84	35.17	95.59	96.41	74.00	-22.41	Peak
2	2483.50	29.19	6.87	35.16	51.24	52.14	74.00	21.86	Peak
3	2485.37	29.19	6.87	35.16	51.49	52.39	74.00	21.61	Peak
4	2500.00	29.23	6.91	35.15	49.13	50.12	74.00	23.88	Peak
5	2506.17	29.29	6.91	35.15	50.35	51.40	74.00	22.60	Peak
6	2524.11	29.35	6.93	35.14	50.60	51.74	74.00	22.26	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,B1:ck 52,
 ShenZhen Science & Industry Park
 Noutou,ShenZhen,GuangDong,China
 Tel:+86-755-26639495-7
 Fax:+86-755-26632877
 Postcode:518057

Data: 50 File: D:\2008 report data\T\TP-LINK\ACS8Q836.EMI (52)

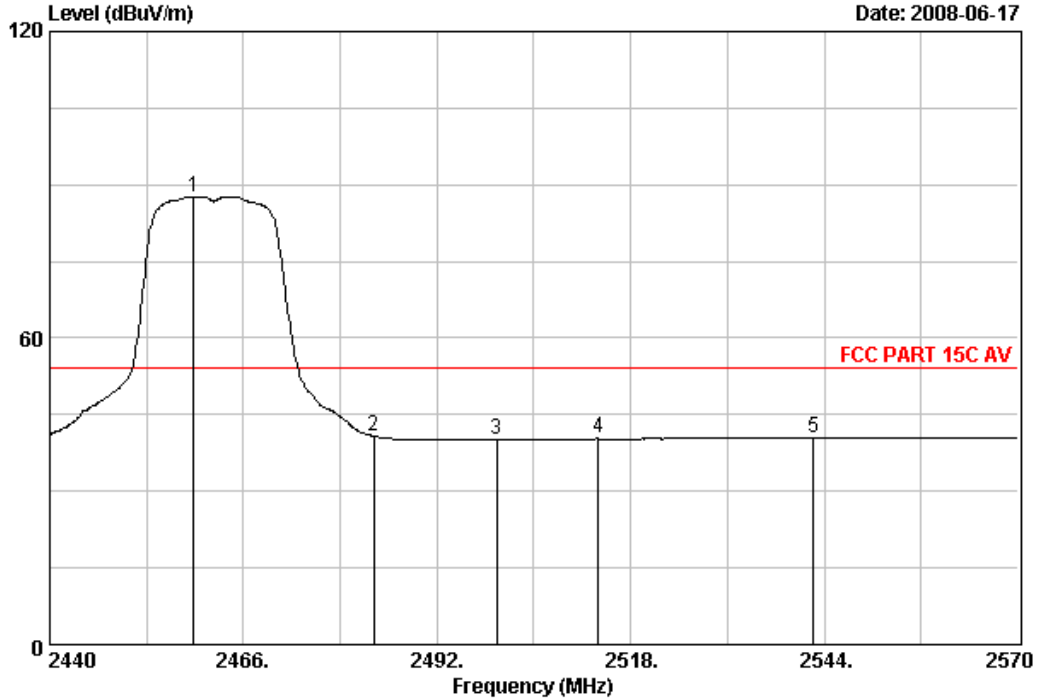

Site no. : RF Chamber Data no. : 50
 Dis. / Ant. : 3m 3115 FACTOR Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Sunny
 EUT : 54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating: DC 5V From PC AC 120V/60Hz
 Test Mode : IEEE802.11g CH11:2462MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2459.37	29.15	6.84	35.17	86.87	87.69	54.00	-33.69	Average
2	2483.50	29.19	6.87	35.16	39.87	40.77	54.00	13.23	Average
3	2500.00	29.23	6.91	35.15	39.14	40.13	54.00	13.87	Average
4	2513.71	29.29	6.93	35.14	39.22	40.30	54.00	13.70	Average
5	2542.57	29.41	6.96	35.13	39.13	40.37	54.00	13.63	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,
Shenzhen Science & Industry Park
Noutou, Shenzhen, Guangdong, China
Tel:+86-755-26639495-7
Fax:+86-755-26632877
Postcode:518057

Data: 51 File: D:\2008 report data\T\TP-LINK\ACS8Q836.EMI (52)

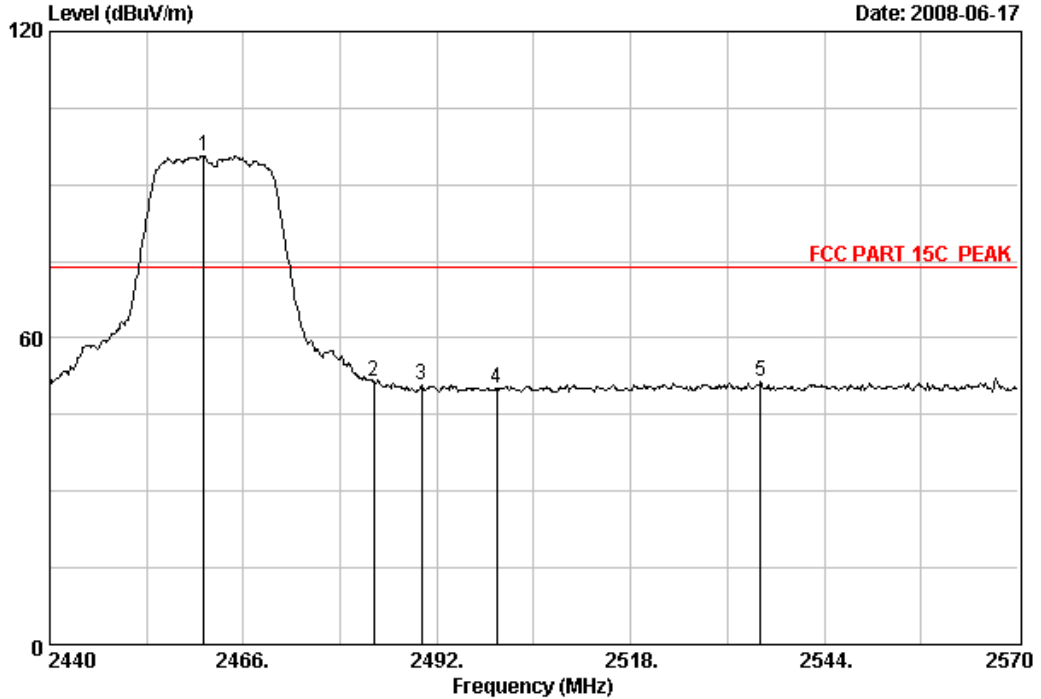

Site no. : RF Chamber Data no. : 51
 Dis. / Ant. : 3m 3115 FACTOR Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Sunny
 EUT : 54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating: DC 5V From PC AC 120V/60Hz
 Test Mode : IEEE802.11g CH11:2462MHz


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
					Reading (dBuV)	Level (dBuV/m)			
1	2460.67	29.15	6.84	35.17	94.92	95.74	74.00	-21.74	Peak
2	2483.50	29.19	6.87	35.16	50.45	51.35	74.00	22.65	Peak
3	2489.92	29.23	6.91	35.15	49.84	50.83	74.00	23.17	Peak
4	2500.00	29.23	6.91	35.15	49.06	50.05	74.00	23.95	Peak
5	2535.42	29.35	6.96	35.14	50.40	51.57	74.00	22.43	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,B1:ck 52,
 ShenZhen Science & Industry Park
 Noutou, ShenZhen, GuangDong, China
 Tel:+86-755-26639495-7
 Fax:+86-755-26632877
 Postcode:518057

Data: 52 File: D:\2008 report data\T\TP-LINK\ACS8Q836.EMI (52)

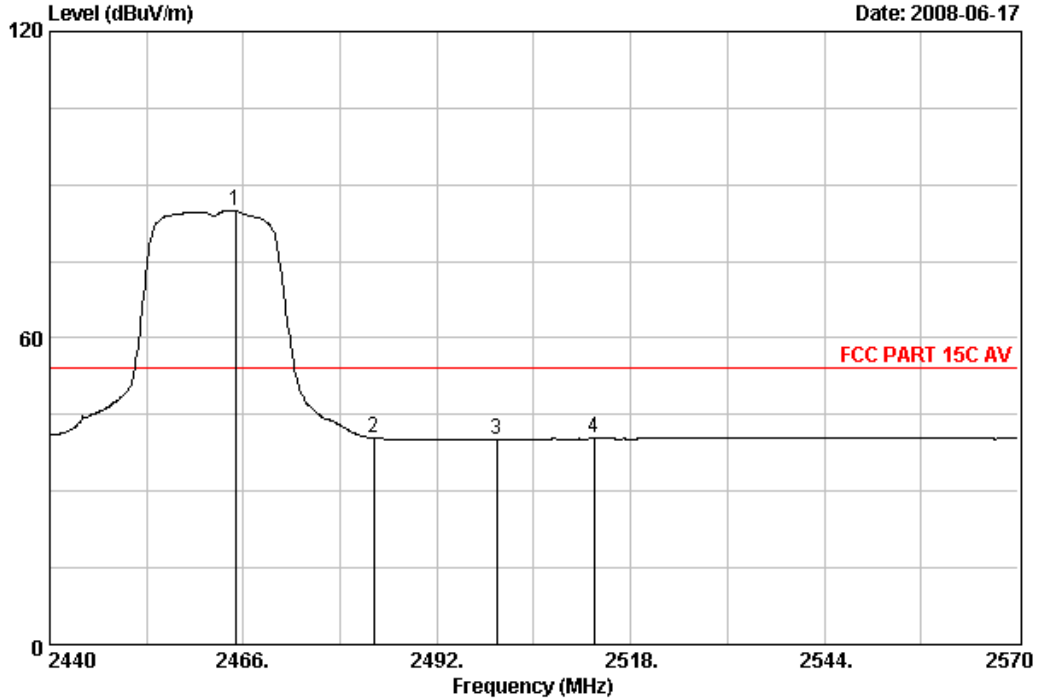

Site no. : RF Chamber Data no. : 52
 Dis. / Ant. : 3m 3115 FACTOR Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Sunny
 EUT : 54M Wireless USB Adapter M/N:TL-WN323G
 Power Rating: DC 5V From PC AC 120V/60Hz
 Test Mode : IEEE802.11g CH11:2462MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
					Reading (dBuV)	Level (dBuV/m)			
1	2464.96	29.15	6.84	35.16	84.04	84.87	54.00	-30.87	Average
2	2483.50	29.19	6.87	35.16	39.55	40.45	54.00	13.55	Average
3	2500.00	29.23	6.91	35.15	39.20	40.19	54.00	13.81	Average
4	2513.06	29.29	6.93	35.14	39.25	40.33	54.00	13.67	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

8. POWER SPECTRAL DENSITY TEST

8.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum Analyzer	Agilent	E4446A	US44300459	May,10, 08	1 Year
2	Attenuator	Agilent	8491B	MY39262165	May,28, 08	1 Year
3	RF Cable	Hubersuhner	SUCOFLEX 102	2861812	May,28, 08	1 Year
4	RF Cable	Hubersuhner	SUCOFLEX 102	28862212	May,28, 08	1 Year


8.2. Test Procedure

The transmitter output was connected to a spectrum analyzer . The power density was measured by spectrum analyzer with 3kHz RBW and 30kHz VBW, sweep time=span/3kHz.


8.3. Test Results

EUT: 54M Wireless USB Adapter M/N: TL-WN323G						
Power: DC 5V From PC AC 120V/60Hz						
Data Rate:11b: 1Mbps ; 11g : 6Mbps (Note 1)						
Ambient Temperature:23°C			Relative Humidity: 60%			
Test date: 2008/06/17			Test site: RF site		Tested By: Sunny	
Test CH: CH1: 2412MHz CH6: 2437MHz CH11: 2462MHz						
Mode	CH	Read (dBm)	Cable Loss (dB)	Result (dBm)	Limit (dBm)	Conclusion
11b	CH1	-14.42	0.6	-13.82	8.00	PASS
	CH6	-15.84	0.6	-15.24	8.00	PASS
	CH11	-14.84	0.6	-14.24	8.00	PASS
11g	CH1	-16.40	0.6	-15.80	8.00	PASS
	CH6	-16.45	0.6	-15.85	8.00	PASS
	CH11	-16.58	0.6	-15.98	8.00	PASS
Note1: According Exploratory test, These data rate have the maximum output power						
Note2: Result = Read + Cable loss						


IEEE 802.11b (ch1)

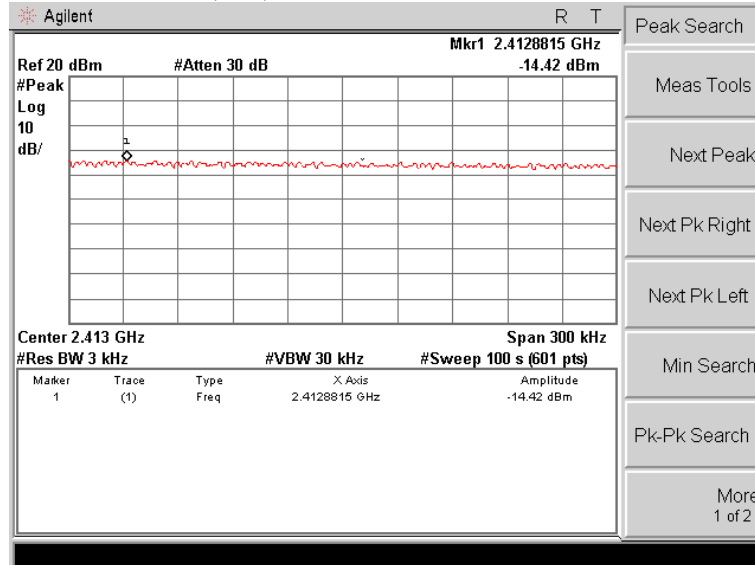


IEEE 802.11b (ch6)

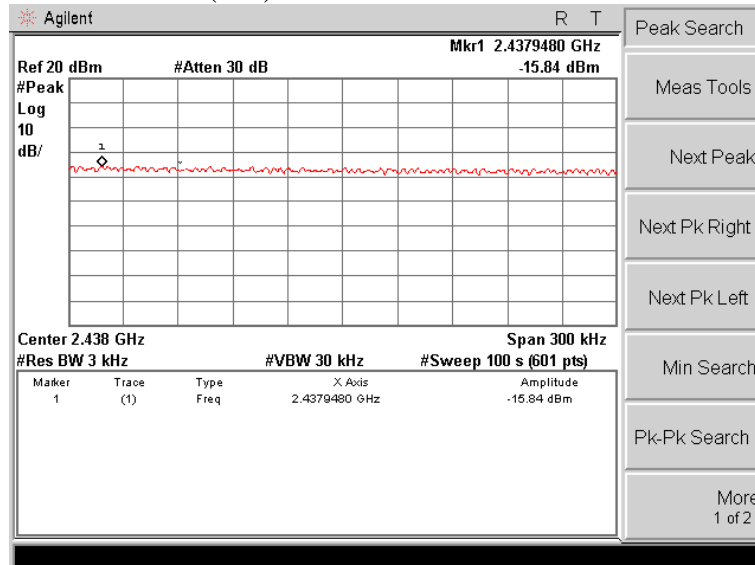


IEEE 802.11b (ch11)

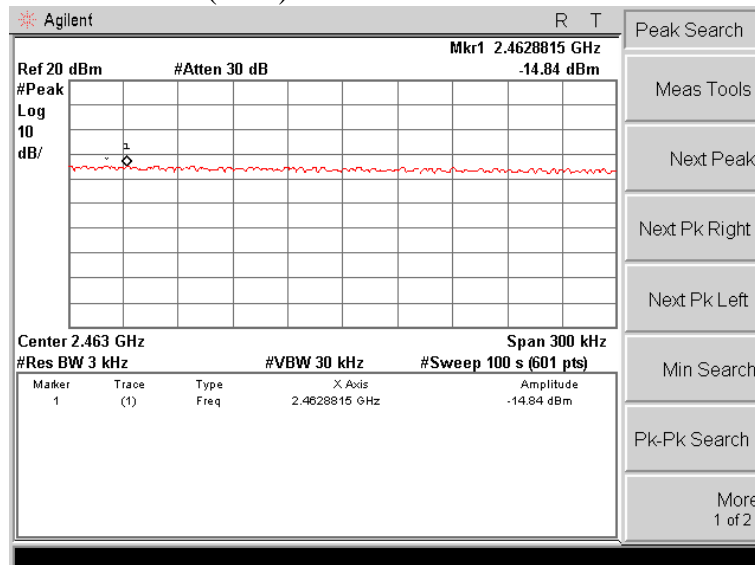


IEEE 802.11g (ch1)

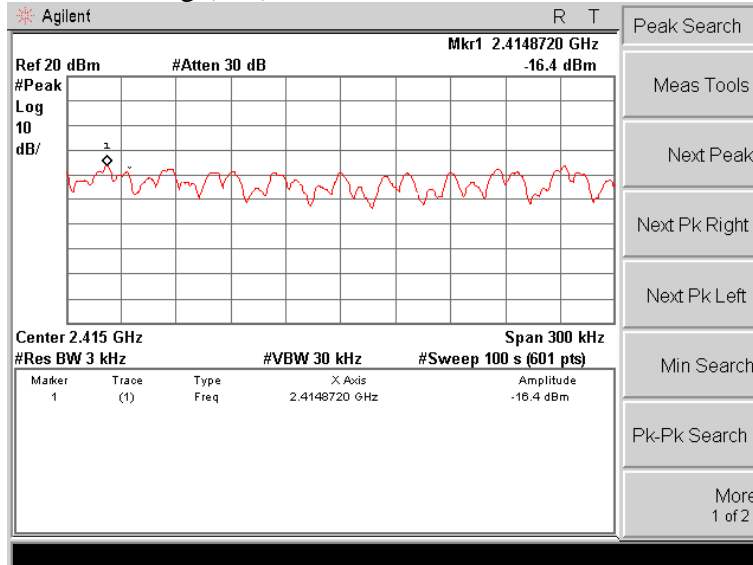

IEEE 802.11g (ch6)

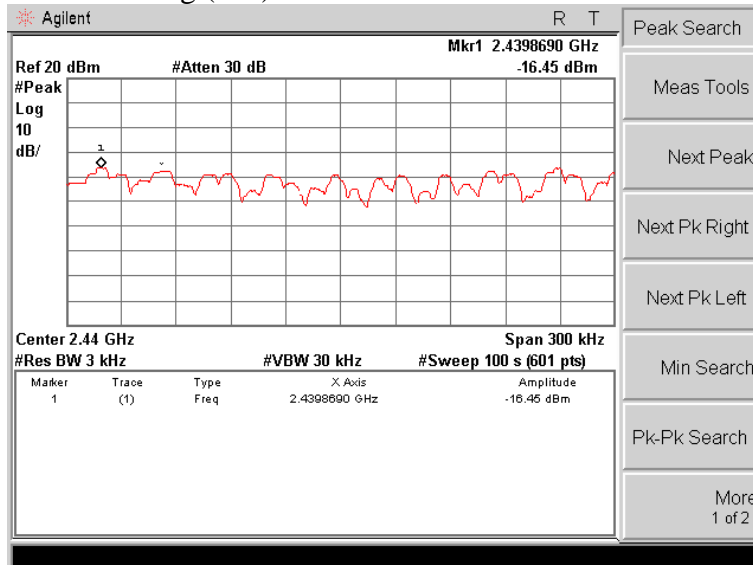

IEEE 802.11g (ch11)

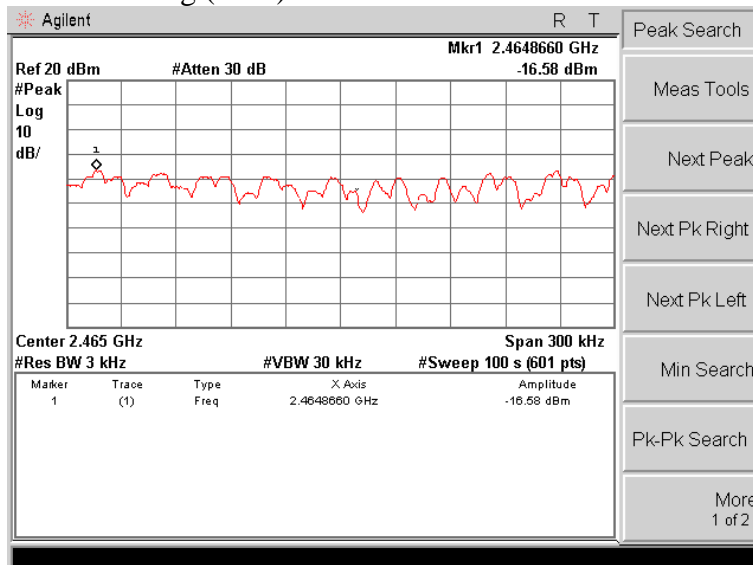

9. ANTENNA REQUIREMENT

10.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

10.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used for this product is an integral PCB antenna (see EUT photo) that no antenna other than that furnished by the responsible party shall be used with the device, The maximum peak gain of this antenna is only 2dBi.

10.DEVIATION TO TEST SPECIFICATIONS

[NONE]