

Report No.: RZA2009-1293



# OET 65 TEST REPORT

Product Name

150Mbps Wireless High Gain USB Adapter

TL-WN722N

TE7WN722N

Client

TP-LINK TECHNOLOGIES CO., LTD.

TA Technology (Shanghai) Co., Ltd. 报告专用章

# **GENERAL SUMMARY**

Product Name		Model	TL-WN722N					
Product Name	150Mbps Wireless High Gain USB Adapter	wodei	IL-VVIN/ZZIN					
FCC ID	TE7WN722N	Report No.	RZA2009-1293					
Client	TP-LINK TECHNOLOGIES CO., LTD.							
Manufacturer	TP-LINK TECHNOLOGIES CO., LTD.							
Standard(s)	ANSI/IEEE Std C95.1-1999: IEEE Standard Exposure to Radio Frequency Electromagnetic OET Bulletin 65 supplement C, publish published June 2002: Additional Information Portable Devices with FCC Limits. Transition Supplement C to OET Bulletin 65.  IEC 62209-2:2008(106/162/CDV): Human handheld and body-mounted wireless continstrumentation, and procedures —Part 2: Proceedings (SAR) for wireless communication deviced body. (frequency rang of 30MHz to 6GHz)  KDB 248227:SAR Measurement Procedures  Tracking number: 532450  Tracking number: 594683	c Fields, 3 kHz  ned June 200 n for Evaluating n Period for the  exposure to ra mmunication dedure to deterr ices used in cla	to 300 GHz.  11 including DA 02-1438, g Compliance of Mobile and e Phantom Requirements of adio frequency fields from levices — Human models, mine the Specific Absorption ose proximity to the human  Transmitters May 2007					
Conclusion	Localized Specific Absorption Rate (SAR) of measured in all cases requested by the relevance report. Maximum localized SAR is below standards cited in Clause 5.1 of this test reports. Pass	exposure limitert.  (Stamp)	ted in Clause 5.2 of this test					
Comment	The test result only responds to the measure	ed sample.						

Approved by 杨伟中

Revised by\_

夏毅宝

Performed by\_

Li Jinchang

Yang Weizhong

Ling Minbao

# **TABLE OF CONTENT**

1. G	General Information	5
1.1.	Notes of the test report	5
1.2.	Testing laboratory	5
1.1.	Applicant Information	6
1.2.	Manufacturer Information	6
1.3.	Information of EUT	7
1.4.	Test Date	7
2. O	perational Conditions during Test	8
2.1.	General description of test procedures	8
2.2.		
2.3.	Picture of host product	10
3. S	AR Measurements System Configuration	11
3.1.		
3.2.	DASY4 E-field Probe System	12
3.	.2.1. ET3DV6 Probe Specification	12
3.	.2.2. E-field Probe Calibration	13
3.3.	Other Test Equipment	13
3.	.3.1. Device Holder for Transmitters	
3.	.3.2. Phantom	
3.4.	Scanning procedure	14
3.5.	S .	
3.	.5.1. Data Storage	
3.	.5.2. Data Evaluation by SEMCAD	
3.6.	,	
3.7.	Equivalent Tissues	20
4. L	aboratory Environment	20
5. C	characteristics of the Test	21
5.1.	Applicable Limit Regulations	21
5.2.	Applicable Measurement Standards	21
6. C	Conducted Output Power Measurement	22
6.1.	Summary	22
6.2.	Conducted Power Results	22
7. Te	est Results	23
7.1.	Dielectric Performance	23
7.2.	System Check	23
7.3.	Summary of Measurement Results	24
7.	.3.1. 802.11b/g	24
7.	.3.2. 802.11n	26
7.4.	Conclusion	27
8. M	leasurement Uncertainty	28
	Agin Test Instruments	20

Report No. RZA2009-1293	Page 4of 107
ANNEX A: Test Layout	30
ANNEX B: System Check Results	31
ANNEX C: Graph Results	33
ANNEX D: Probe Calibration Certificate	81
ANNEX E: D2450V2 Dipole Calibration Certificate	90
ANNEX F: DAE4 Calibration Certificate	99
ANNEX G: The EUT Appearances and Test Configuration	104

Report No. RZA2009-1293 Page 5of 107

# 1. General Information

## 1.1. Notes of the test report

**TA Technology (Shanghai) Co., Ltd.** guarantees the reliability of the data presented in this test report, which is the results of measurements and tests performed for the items under test on the date and under the conditions stated in this test report and is based on the knowledge and technical facilities available at TA Technology (Shanghai) Co., Ltd. at the time of execution of the test.

**TA Technology (Shanghai) Co., Ltd.** is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the items under test and the results of the test. This report only refers to the item that has undergone the test.

This report standalone dose not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities. This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of **TA Technology (Shanghai) Co., Ltd.** and the Accreditation Bodies, if it applies.

# 1.2. Testing laboratory

Company: TA Technology (Shanghai) Co., Ltd.

Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

City: Shanghai

Post code: 201201

Country: P. R. China

Contact: Yang Weizhong

Telephone: +86-021-50791141/2/3

Fax: +86-021-50791141/2/3-8000

Website: http://www.ta-shanghai.com

E-mail: yangweizhong@ta-shanghai.com

Report No. RZA2009-1293 Page 6of 107

# 1.1. Applicant Information

Company: TP-LINK TECHNOLOGIES CO., LTD.

Building 7, Second Part, Honghualing Industrial Zone, Xili town, Nanshan, Shenzhen,

P. R. China

City: Shenzhen

Postal Code: 518000

Country: China

Contact: Wei Xi

Telephone: 0755-26525554

Fax: 0755-26508930

# 1.2. Manufacturer Information

Company: TP-LINK TECHNOLOGIES CO., LTD.

Building 7, Second Part, Honghualing Industrial Zone, Xili town, Nanshan, Shenzhen,

P. R. China

City: Shenzhen

Postal Code: 518000

Country: China

Telephone: 0755-26525554

Fax: 0755-26508930

### 1.3. Information of EUT

### **General information**

Device type :	portable device					
Exposure category:	uncontrolled environment / general	uncontrolled environment / general population				
Name of EUT:	150Mbps Wireless High Gain USB	Adapter				
S/N or IMEI	097UJ100455					
Device operating configurations :						
Operating mode(s):	802.11b/g; (tested) 802.11n; (tested)					
Operating frequency range (a)	Band	Tx (MHz)				
Operating frequency range(s)	802.11b/g/n	2412~2462MHz				
Test channel (Low –Middle –High)	1-6-11 (802.11b/g) 1-6-11 [802.11n (HT20)] 1-4-7 [802.11n (HT40)]					
Antenna type:	Internal antenna					
Used host products:	BenQ Joybook R55V					

Equipment Under Test (EUT) is a model of 150Mbps Wireless High Gain USB Adapter. During SAR test of the EUT, it was connected to a portable computer. SAR is tested for 802.11b, 802.11g and 802.11n. The measurements were performed in one host product (BenQ Joybook R55V). BenQ Joybook R55V laptop has vertical USB slot and horizontal USB slot.

The sample under test was selected by the Client.

Components list please refer to documents of the manufacturer.

## 1.4. Test Date

The test is performed from November 14, 2009 to November 15, 2009.

Report No. RZA2009-1293 Page 8of 107

# 2. Operational Conditions during Test

# 2.1. General description of test procedures

For the 802.11b/g SAR body tests, a communication link is set up with the test mode software for WIFI mode test. The Absolute Radio Frequency Channel Number (ARFCN) is allocated to 1, 6 and 11 respectively in the case of 2450 MHz. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode.

802.11b/g operating modes are tested independently according to the service requirements in each frequency band.802.11b/g modes are tested on channels1,6,11;however,if output power reduction is necessary for channels 1 and /or 11 to meet restricted band requirements the highest output channels closest to each of these channels must be tested instead.

SAR is not required for 802.11g channels when the maximum average output power is less than 0.25dB higher than that measured on the corresponding 802.11b channels. When the maximum average output channel in each frequency band is not included in the "default test channels", the maximum channel should be tested instead of an adjacent "default test channels", these are referred to as the "required test channels" and are illustrated in table 1.

And according to the "3 dB rule" FCC Public Notice, DA 02-1948, June 19.2002 " If the SAR measured at the middle channel for each test configuration is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s)". Then The Absolute Radio Frequency Channel Number (ARFCN) is firstly allocated to 2437 respectively in the case of 802.11b/g.

Table 1: "Default Test Channels"

			Turbo	"Default Test (		Channels"	
Mode	GHz	Channel	15,247		LINII		
		Cilaililei	802.11b	802.11g	UNII		
	2.412	1#		√	*		
802.11b/g	2.437	6	6	√	*		
	2.462	11#		√	*		

Note: #=when output power is reduced for channel 1 and /or 11to meet restricted band requirements the highest out put channels closet to each of these channels should be tested.

 $<sup>\</sup>sqrt{=}$  " default test channels"

<sup>\* =</sup>possible 802.11g channels with maximum average output 0.25dB>=the "default test channels"

Report No. RZA2009-1293 Page 9of 107

#### 2.2. Position of module in Portable devices

The measurements were performed in one host product (BenQ Joybook R55V). BenQ Joybook R55V laptop has vertical USB slot and horizontal USB slot.

A test distance of 5mm or less, according to KDB 447498, should be considered for the orientation that can satisfy such requirements.

For each channel, the EUT is tested at the following 5 test positions:

- Test Position 1: The EUT is connected to the portable computer with horizontal USB slot. The back side of the EUT towards the bottom of the flat phantom. (ANNEX G Picture 5)
- Test Position 2: The EUT is connected to the portable computer with horizontal USB slot. The front side of the EUT towards the bottom of the flat phantom. (ANNEX G Picture 6)
- Test Position 3: The EUT is connected to the portable computer through a 19cm USB cable.
   The left side of the EUT towards the bottom of the flat phantom. (ANNEX G Picture 7)
- Test Position 4: The EUT is connected to the portable computer with vertical USB slot. The right side of the EUT towards the bottom of the flat phantom. (ANNEX G Picture 8)
- Test Position 5: The EUT is connected to the portable computer with vertical USB slot. The top side of the EUT towards the bottom of the flat phantom. (ANNEX G Picture 9)

# 2.3. Picture of host product

During the test, BenQ Joybook R55V laptop was used as an assistant to help to setup communication. (See Picture 1)



Picture 1-a: BenQ Joybook R55V Close



Picture 1-b: BenQ Joybook R55V Open



Picture 1-c: BenQ Joybook R55V with horizontal USB slot



Picture 1-d: BenQ Joybook R55V with vertical USB slot



Picture 1-e: a 19cm USB cable Picture 1: Computer as a test assistant

# 3. SAR Measurements System Configuration

# 3.1. SAR Measurement Set-up

The DASY4 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY4 measurement server.
- The DASY4 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2003
- DASY4 software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System validation dipoles allowing to validate the proper functioning of the system.

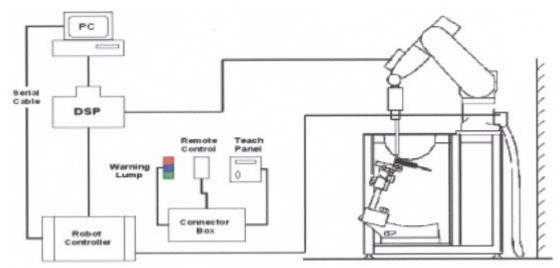


Figure 1 SAR Lab Test Measurement Set-up

# 3.2. DASY4 E-field Probe System

The SAR measurements were conducted with the dosimetric probe ET3DV6 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

### 3.2.1. ET3DV6 Probe Specification

Construction Symmetrical design with triangular core

Built-in optical fiber for surface detection System (ET3DV6 only) Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents,

e.q., glycol)

Calibration In air from 10 MHz to 3 GHz

In brain and muscle simulating tissue at frequencies of 450MHz, 900MHz, 1750

MHz, 1950MHz and 2450 MHz.

(accuracy±8%)

Calibration for other liquids and

liquids over diffuse reflecting surface

frequencies upon request

Frequency 10 MHz to 2.5 GHz; Linearity: ±0.2 dB

(30 MHz to 2.5 GHz)

Directivity ±0.2 dB in brain tissue

(rotation around probe axis)

±0.4 dB in brain tissue

(rotation around probe axis)

Dynamic Range 5u W/g to > 100mW/g; Linearity: ±0.2dB

Surface Detection ±0.2 mm repeatability in air and clear

(ET3DV6 only)

Dimensions Overall length: 330mm

Tip length: 16mm Body diameter: 12mm Tip diarneter: 6.8mm

Distance from probe tip to dipole

centers: 2.7mm

Application General dosimetry up to 2.5GHz

Compliance tests of mobile phones Fast automatic scanning in arbitrary

**Phantoms** 



Figure 2 ET3DV6 E-field Probe



Figure 3 ET3DV6 E-field probe

#### 3.2.2. E-field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than  $\pm$  10%. The spherical isotropy was evaluated and found to be better than  $\pm$  0.25dB. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies bellow 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\mathbf{SAR} = \mathbf{C} \frac{\Delta T}{\Delta t}$$

Where:  $\Delta t = \text{Exposure time (30 seconds)}$ ,

C = Heat capacity of tissue (brain or muscle),

 $\Delta T$  = Temperature increase due to RF exposure.

Or

$$SAR = \frac{|E|^2 \sigma}{\rho}$$

Where:

 $\sigma$  = Simulated tissue conductivity,

 $\rho$  = Tissue density (kg/m3).

# 3.3. Other Test Equipment

#### 3.3.1. Device Holder for Transmitters

The DASY device holder is designed to cope with the die rent positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles. The amount of dielectric material

has been reduced in the closest vicinity of the device, since measurements have suggested that the inference of the clamp on the test results could thus be lowered.



Figure 4 Device Holder

Report No. RZA2009-1293

Page 14of 107

#### 3.3.2. **Phantom**

The Generic Twin Phantom is constructed of a fiberglass shell integrated in a wooden Figure. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

Shell Thickness 2±0.1 mm Filling Volume Approx. 20 liters

Dimensions 810 x 1000 x 500 mm (H x L x W)

Aailable Special



**Figure 5 Generic Twin Phantom** 

# 3.4. Scanning procedure

The DASY4 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The "reference" and "drift" measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT's output power and should vary max. ± 5 %.
- The "surface check" measurement tests the optical surface detection system of the DASY4 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above ± 0.1mm). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within ± 30°.)

#### Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values before running a detailed measurement around the hot spot. Before starting the area scan a grid

Report No. RZA2009-1293

Page 15of 107

spacing of 10 mm x 10 mm is set. During the scan the distance of the probe to the phantom remains unchanged.

After finishing area scan, the field maxima within a range of 2 dB will be ascertained.

#### Zoom Scan

Zoom Scans are used to estimate the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default Zoom Scan is done by 7x7x7 points within a cube whose base is centered around the maxima found in the preceding area scan.

#### Spatial Peak Detection

The procedure for spatial peak SAR evaluation has been implemented and can determine values of masses of 1g and 10g, as well as for user-specific masses. The DASY4 system allows evaluations that combine measured data and robot positions, such as:

- maximum search
- extrapolation
- boundary correction
- peak search for averaged SAR

During a maximum search, global and local maxima searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard's method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation. Extrapolation routines require at least 10 measurement points in 3-D space. They are used in the Zoom Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard's method for extrapolation. For a grid using 7x7x7 measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1g and 10g cubes.

 A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube 7x7x7 scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 5mm steps. Report No. RZA2009-1293 Page 16of 107

# 3.5. Data Storage and Evaluation

#### 3.5.1. Data Storage

The DASY4 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DA4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

#### 3.5.2. Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters: - Sensitivity Normi, ai<sub>0</sub>, a<sub>i1</sub>, a<sub>i2</sub>

Conversion factor ConvF<sub>i</sub>
 Diode compression point Dcp<sub>i</sub>

Device parameters: - Frequency f

- Crest factor cf

Media parameters: - Conductivity

- Density

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY4 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot c f / d c p_i$$

With  $V_i$  = compensated signal of channel i (i = x, y, z)

 $U_i$  = input signal of channel i (i = x, y, z)

**cf** = crest factor of exciting field (DASY parameter)

**dcp**<sub>i</sub> = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:  $E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$ 

H-field probes:  $H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1} f + a_{i2} f^2) / f$ 

With  $V_i$  = compensated signal of channel i (i = x, y, z)

**Norm**<sub>i</sub> = sensor sensitivity of channel i (i = x, y, z)

[mV/(V/m)<sup>2</sup>] for E-field Probes

**ConvF** = sensitivity enhancement in solution

**a**<sub>ii</sub> = sensor sensitivity factors for H-field probes

**f** = carrier frequency [GHz]

 $\mathbf{E}_{i}$  = electric field strength of channel i in V/m

 $H_i$  = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot .) / ( \cdot 1000)$$

Report No. RZA2009-1293

Page 18of 107

with **SAR** = local specific absorption rate in mW/g

**E**<sub>tot</sub> = total field strength in V/m

- = conductivity in [mho/m] or [Siemens/m]
- = equivalent tissue density in g/cm<sup>3</sup>

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770$$
 or  $P_{pwe} = H_{tot}^2 \cdot 37.7$ 

with  $P_{pwe}$  = equivalent power density of a plane wave in mW/cm<sup>2</sup>

 $E_{tot}$  = total electric field strength in V/m

 $H_{tot}$  = total magnetic field strength in A/m

# 3.6. System check

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulates were measured every day using the dielectric probe kit and the network analyzer. A system check measurement was made following the determination of the dielectric parameters of the simulates, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The system check results (dielectric parameters and SAR values) are given in the Table 6.

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system (±10 %).

System check is performed regularly on all frequency bands where tests are performed with the DASY4 system.

3D Probe positioner

Field probe
Field probe
Field Phantom
Dipole

Signal
Generator
Att2
PM3

Att2
PM3

Figure 6 System Check Set-up

# 3.7. Equivalent Tissues

The liquid is consisted of water, salt and Glycol. The liquid has previously been proven to be suited for worst-case. The Table 2 shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the OET 65.

**Table 2: Composition of the Body Tissue Equivalent Matter** 

MIXTURE%	FREQUENCY 2450MHz		
Water	73.2		
Glycol	26.7		
Salt	0.1		
Dielectric Parameters	f=2450MH=		
Target Value	f=2450MHz ε=52.70 σ=1.95		

# 4. Laboratory Environment

**Table 3: The Ambient Conditions during Test** 

Temperature	Min. = 20°C, Max. = 25 °C			
Relative humidity	Min. = 30%, Max. = 70%			
Ground system resistance	< 0.5 Ω			
Ambient noise is checked and found very low and in compliance with requirement of standards.				
Reflection of surrounding objects is minimize	ed and in compliance with requirement of standards.			

Report No. RZA2009-1293 Page 21of 107

# 5. Characteristics of the Test

# 5.1. Applicable Limit Regulations

**ANSI/IEEE Std C95.1-1999:** IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

## 5.2. Applicable Measurement Standards

**OET Bulletin 65 supplement C, published June 2001 including DA 02-1438, published June 2002:** Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits. Transition Period for the Phantom Requirements of Supplement C to OET Bulletin 65.

**IEC 62209-2:2008(106/162/CDV)::** Human exposure to radio frequency fields from handheld and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 2: Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body. ( frequency rang of 30MHz to 6GHz )

KDB 248227:SAR Measurement Procedures for 802.11a/b/g Transmitters May 2007

Report No. RZA2009-1293

### Page 22of 107

# 6. Conducted Output Power Measurement

# 6.1. Summary

The DUT is tested using an E5515C communications tester as controller unit to set test channels and maximum output power to the DUT, as well as for measuring the conducted peak power. Conducted output power was measured using an integrated RF connector and attached RF cable. This result contains conducted output power for the EUT.

# 6.2. Conducted Power Results

**Table 4: Conducted Power Measurement Results** 

	Conducted Power				
802.11b	Channel 1	Channel 6	Channel 11		
	(2412MHz)	(2437MHz)	(2462MHz)		
Before Test (dBm)	15.5	15.5	15.5		
After Test (dBm)	15.4	15.4	15.5		
		Conducted Power			
802.11g	Channel 1	Channel 6	Channel 11		
	(2412MHz)	(2437MHz)	(2462MHz)		
Before Test (dBm)	15.5	15.5	13.5		
After Test (dBm)	15.4	15.4	13.4		
	Conducted Power				
802.11n(HT 20)	Channel 1	Channel 6	Channel 11		
	(2412MHz)	(2437MHz)	(2462MHz)		
Before Test (dBm)	11.5	15.5	11.5		
After Test (dBm)	11.4	15.4	11.4		
		Conducted Power			
802.11n(HT 40)	Channel 1	Channel 4	Channel 7		
	(2412MHz)	(2427MHz)	(2442MHz)		
Before Test (dBm)	9.0	13.0	9.5		
After Test (dBm)	8.9	12.9	9.4		

# 7. Test Results

# 7.1. Dielectric Performance

Table 5: Dielectric Performance of Body Tissue Simulating Liquid

Eroguenev	Description	Dielectric Par	Temp		
Frequency	Description	$\epsilon_{r}$ $\sigma(s/m)$		°C	
	Target value	52.70	1.95	,	
2450MHz	±10% window	50.07 — 55.34	1.85 — 2.05	1	
(body)	Measurement value 2009-11-14	51.75	2.00	21.9	

# 7.2. System Check

Table 6: System Check for Body tissue simulating liquid

Frequency	Description	SAR(W/kg)		Dielectric Parameters		Temp
		10g	1g	٤r	σ(s/m)	$^{\circ}$
	Recommended value	6.18	13.10	F2 F	2.02	,
2450MHz	±10% window	5.56—6.80	11.79 — 14.41	52.5		/
2-750WII 12	Measurement value	6.46	14.00	51.75	2.00	21.7
	2009-11-14	0.40	14.00	31.73	2.00	21.7

Note: 1. The graph results see ANNEX B.

<sup>2.</sup> Recommended Values used derive from the calibration certificate and 250 mW is used as feeding power to the calibrated dipole.

# 7.3. Summary of Measurement Results

# 7.3.1. 802.11b/g

Table 7: SAR Values (802.11b/g)

Limit of SAR (W/kg)  Test Case Of Body			1 g Average 1.6 urement t(W/kg)	Power Drift (dB) ± 0.21  Power	Graph Results	
Different Test Position	Different Antenna Toward Position	Channel	10 g Average	1 g Average	Drift (dB)	
		BenQ	Joybook R5	5V		
	Back	Middle	0.010	0.020	0.170	Figure 9
Test Position 1	Up	High	0.538	1.160	0.067	Figure 11
Test Position 1		Middle	0.392	0.834	-0.157	Figure 13
		Low	0.337	0.715	0.062	Figure 15
		High	0.439	0.938	-0.014	Figure 17
Test Position 2	Up	Middle	0.396	0.852	0.121	Figure 19
		Low	0.313	0.668	0.021	Figure 21
Test Position 3	Up	Middle	0.014	0.024	-0.038	Figure 23
		High	0.526	1.110	-0.111	Figure 25
Test Position 4	Up	Middle	0.423	0.884	0.144	Figure 27
		Low	0.339	0.707	0.035	Figure 29
Test Position 5	straight	Middle	0.137	0.264	0.177	Figure 31
	worst	case position	on of 802.11k	with 802.11g		
Test Position 1	Up	High	0.342	0.748	-0.057	Figure 33

Note: 1. The value with blue color is the maximum SAR Value of each test band.

- 2. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB (< 0.8W/kg) lower than the SAR limit, testing at the high and low channels is optional.</p>
- 3. Upper and lower frequencies were measured at the worst case.

Report No. RZA2009-1293 Page 25of 107

Table 8: SAR Values [802.11b/g, enhanced energy coupling at increased separation distances]

Different Test Position	Distance of EUT to Phantom	Channel	Measurement Result (W/kg)	50% of initial position SAR (W/kg)	125% of initial position SAR (W/kg)
Test Position 1	initial position	High	1.150	0.575	1.438
163t i OSitiOii i	5mm	riigii	0.450	0.575	1.430

- Note: 1. The probe tip location is fixed at the distance of one half the probe tip diameter from the phantom surface.
  - 2. when the device position with the highest point SAR is > 25% of that measured at the initial position, a complete 1-g SAR evaluation is required for this configuration.
  - 3. A single point SAR is measured for each of these device positions until the SAR is less than 50% of that measured at the initial position.

### 7.3.2. 802.11n

Table 9: SAR Values [802.11n (HT20/HT40)]

Limit of SAR (W/kg)			10 g 1 g Average Average 2.0 1.6  Measurement Result(W/kg)		Power Drift (dB) ± 0.21	Crank			
Different Test Position	Different Antenna Toward Position	Channel	10 g Average	1 g Average	Power Drift (dB)	Graph Results			
	BenQ Joybook R55V								
	Back	Middle	0.006	0.013	-0.069	Figure 35			
Test Position 1	Up	High	0.194	0.422	-0.040	Figure 37			
Test Position 1		Middle	0.429	0.929	0.045	Figure 39			
		Low	0.146	0.315	-0.080	Figure 41			
Test Position 2	Up	Middle	0.340	0.739	-0.072	Figure 43			
Test Position 3	Up	Middle	0.012	0.020	-0.065	Figure 45			
	Position 4 Up	High	0.231	0.480	0.088	Figure 47			
Test Position 4		Middle	0.393	0.837	-0.038	Figure 49			
		Low	0.162	0.351	-0.013	Figure 51			
Test Position 5	straight	Middle	0.143	0.276	-0.023	Figure 53			
worst case position of HT20 with HT40									
Test Position 1	Up	Middle	0.240	0.523	0.071	Figure 55			

Note: 1. The value with blue color is the maximum SAR Value of each test band.

- 2. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB (< 0.8W/kg) lower than the SAR limit, testing at the high and low channels is optional.
- 3. Upper and lower frequencies were measured at the worst case.

Different Test Position	Distance of EUT to Phantom	Channel	Measurement Result (W/kg)	50% of initial position SAR (W/kg)	125% of initial position SAR (W/kg)	
Test Position 1	initial position	Middle	0.915	0.458	1.144	
Test Fosition 1	5mm	Midule	0.365	0.436	1.144	

- Note: 1. The probe tip location is fixed at the distance of one half the probe tip diameter from the phantom surface.
  - 2. when the device position with the highest point SAR is > 25% of that measured at the initial position, a complete 1-g SAR evaluation is required for this configuration.
  - 3. A single point SAR is measured for each of these device positions until the SAR is less than 50% of that measured at the initial position.

# 7.4. Conclusion

Localized Specific Absorption Rate (SAR) of this portable wireless device has been measured in all cases requested by the relevant standards cited in Clause 5.2 of this report. Maximum localized SAR<sub>1g</sub> is 1.160 W/kg that is below exposure limits specified in the relevant standards cited in Clause 5.1 of this test report.

Report No. RZA2009-1293

# 8. Measurement Uncertainty

No.	source	Туре	Uncertaint y Value (%)	Probability Distributio n	k	Ci	Standard ncertainty $u_i^{'}(\%)$	Degree of freedom V <sub>eff</sub> or v <sub>i</sub>	
1	System repetivity	Α	0.5	N	1	1	0.5	9	
	Measurement system								
2	probe calibration	В	5.9	N	1	1	5.9	∞	
3	axial isotropy of the probe	В	4.7	R	$\sqrt{3}$	$\sqrt{0.5}$	1.9	∞	
4	Hemispherical isotropy of the probe	В	9.4	R	$\sqrt{3}$	$\sqrt{0.5}$	3.9	∞	
6	boundary effect	В	1.9	R	$\sqrt{3}$	1	1.1	∞	
7	probe linearity	В	4.7	R	$\sqrt{3}$	1	2.7	∞	
8	System detection limits	В	1.0	R	$\sqrt{3}$	1	0.6	∞	
9	readout Electronics	В	1.0	N	1	1	1.0	∞	
10	response time	В	0	R	$\sqrt{3}$	1	0	∞	
11	integration time	В	4.32	R	$\sqrt{3}$	1	2.5	∞	
12	noise	В	0	R	$\sqrt{3}$	1	0	∞	
13	RF Ambient Conditions	В	3	R	$\sqrt{3}$	1	1.73	∞	
14	Probe Positioner Mechanical Tolerance	В	0.4	R	$\sqrt{3}$	1	0.2	∞	
15	Probe Positioning with respect to Phantom Shell	В	2.9	R	$\sqrt{3}$	1	1.7	∞	
16	Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	В	3.9	R	$\sqrt{3}$	1	2.3	∞	
Test sample Related									
17	-Test Sample Positioning	Α	2.9	N	1	1	2.9	5	
18	-Device Holder Uncertainty	Α	4.1	N	1	1	4.1	5	
19	-Output Power Variation - SAR drift measurement	В	5.0	R	$\sqrt{3}$	1	2.9	∞	
	Physical parameter								

Page 28of 107

Report No. RZA2009-1293 Page 29of 107

20	-phantom	В	4.0	R	$\sqrt{3}$	1	2.3	80
21	-liquid conductivity (deviation from target)	В	5.0	R	$\sqrt{3}$	0.6 4	1.8	∞
22	-liquid conductivity (measurement uncertainty)	В	5.0	N	1	0.6 4	3.2	∞
23	-liquid permittivity (deviation from target)	В	5.0	R	$\sqrt{3}$	0.6	1.7	∞
24	-liquid permittivity (measurement uncertainty )	В	5.0	N	1	0.6	3.0	∞
Combined standard uncertainty		$u_{c}' = \sqrt{\sum_{i=1}^{21} c_{i}^{2} u_{i}^{2}}$				12.0		
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$		N	k=2		24.0	

# 9. Main Test Instruments

**Table 11: List of Main Instruments** 


No.	Name	Туре	Serial Number	Calibration Date	Valid Period
01	Network analyzer	Agilent 8753E	US37390326	September 13, 2009	One year
02	Dielectric Probe Kit	Agilent 85070E	US44020115	No Calibration Ro	equested
03	Power meter	Agilent E4417A	GB41291714	March 14, 2009	One year
04	Power sensor	Agilent 8481H	MY41091316	March 14, 2009	One year
05	Signal Generator	HP 8341B	2730A00804	September 13, 2009	One year
06	Amplifier	IXA-020	0401	No Calibration Ro	equested
07	BTS	E5515C	MY48360988	December 16, 2008	One year
08	E-field Probe	ET3DV6	1737	November 25, 2008	One year
09	DAE	DAE4	452	November 18, 2008	One year
10	Validation Kit 2450MHz	D2450V2	786	July 15, 2009	One year

\*\*\*\*\*END OF REPORT BODY\*\*\*\*\*

# **ANNEX A: Test Layout**



Picture 2: Specific Absorption Rate Test Layout

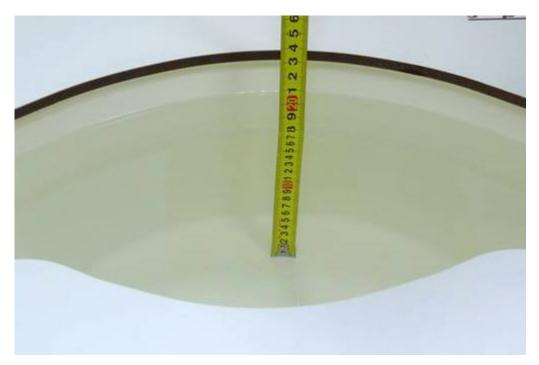

Picture 3: Liquid depth in the flat Phantom (2450 MHz)

# **ANNEX B: System Check Results**

# System Performance Check at 2450 MHz

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:786

Date/Time: 11/14/2009 2:20:36 PM

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2450 MHz;  $\sigma = 2.00 \text{ mho/m}$ ;  $\varepsilon_r = 51.75$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(3.91, 3.91, 3.91); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

#### d=10mm, Pin=250mW/Area Scan (71x71x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 21.5 mW/g


# **d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 71.0 V/m; Power Drift = 0.011 dB

Peak SAR (extrapolated) = 28.2 W/kg

# SAR(1 g) = 14.0 mW/g; SAR(10 g) = 6.46 mW/g

Maximum value of SAR (measured) = 19.8 mW/g

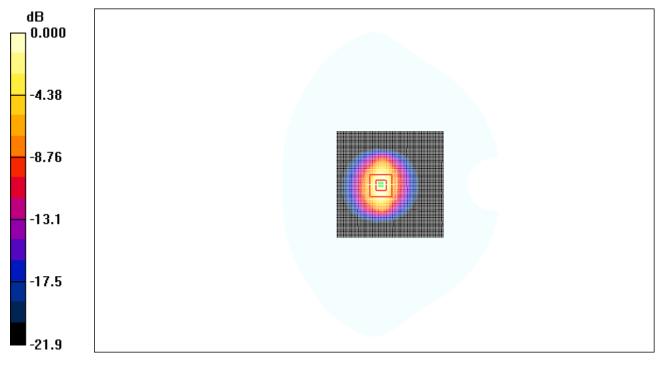

0 dB = 19.8 mW/g

Figure 7 System Performance Check 2450MHz 250mW

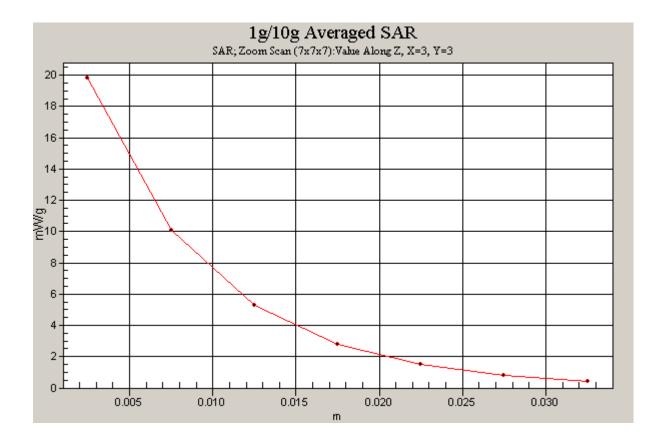


Figure 8 Z-Scan at power reference point (System Check at 2450 MHz Dipole)

Report No. RZA2009-1293 Page 33of 107

# **ANNEX C: Graph Results**

### 802.11b with BenQ Joybook R55V Test Position 1(Antenna Toward Back) Middle

Date/Time: 11/14/2009 7:07:36 PM

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): f = 2437 MHz;  $\sigma = 1.98 \text{ mho/m}$ ;  $\epsilon_r = 51.8$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Ambient Temperature: 22.3 °C Liqiud Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(3.91, 3.91, 3.91); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 1 Middle/Area Scan (61x61x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.021 mW/g

**Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.07 V/m; Power Drift = 0.170 dB

Peak SAR (extrapolated) = 0.044 W/kg

SAR(1 g) = 0.020 mW/g; SAR(10 g) = 0.010 mW/g

Maximum value of SAR (measured) = 0.021 mW/g

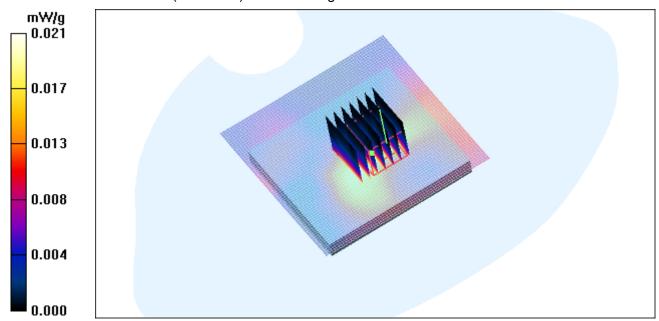


Figure 9 802.11b with BenQ Joybook R55V Test Position 1(Antenna Toward Back) Channel 6

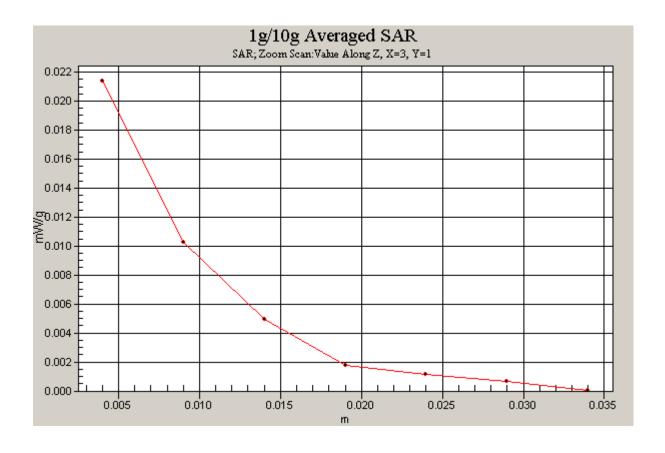


Figure 10 Z-Scan at power reference point (802.11b with BenQ Joybook R55V Test Position 1(Antenna Toward Back) Channel 6)

## 802.11b with BenQ Joybook R55V Test Position 1(Antenna Toward Up) High

Date/Time: 11/14/2009 8:44:47 PM

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2462 MHz;  $\sigma = 2.02$  mho/m;  $\varepsilon_r = 51.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 ℃ Liqiud Temperature: 21.5 ℃

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(3.91, 3.91, 3.91); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Test Position 1 High/Area Scan (61x121x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.28 mW/g

Test Position 1 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.8 V/m; Power Drift = 0.067 dB

Peak SAR (extrapolated) = 2.79 W/kg

SAR(1 g) = 1.16 mW/g; SAR(10 g) = 0.538 mW/g

Maximum value of SAR (measured) = 1.25 mW/g

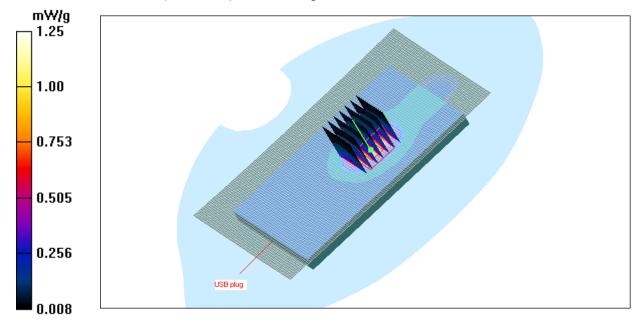


Figure 11 802.11b with BenQ Joybook R55V Test Position 1(Antenna Toward Up) Channel 11

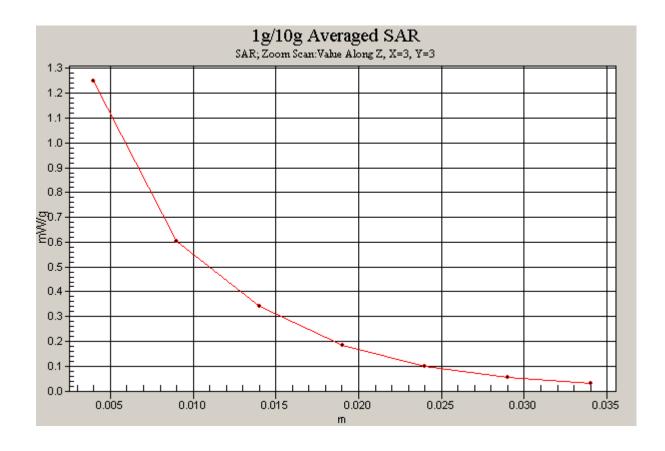


Figure 12 Z-Scan at power reference point (802.11b with BenQ Joybook R55V Test Position 1(Antenna Toward Up) Channel 11)

# 802.11b with BenQ Joybook R55V Test Position 1(Antenna Toward Up) Middle

Date/Time: 11/14/2009 9:36:09 PM

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): f = 2437 MHz;  $\sigma = 1.98$  mho/m;  $\epsilon_r = 51.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(3.91, 3.91, 3.91); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 1 Middle/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.922 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm,

dz=5mm

Reference Value = 15.1 V/m; Power Drift = -0.157 dB

Peak SAR (extrapolated) = 1.97 W/kg

SAR(1 g) = 0.834 mW/g; SAR(10 g) = 0.392 mW/g

Maximum value of SAR (measured) = 0.913 mW/g

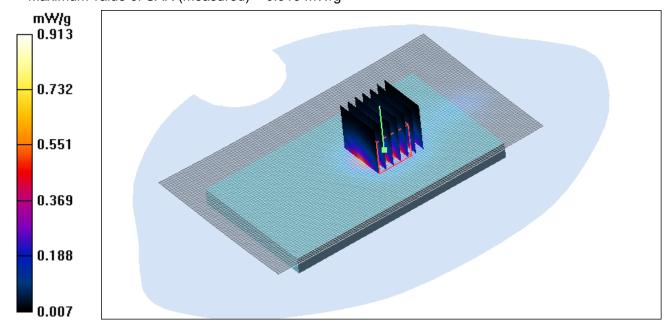


Figure 13 802.11b with BenQ Joybook R55V Test Position 1(Antenna Toward Up) Channel 6

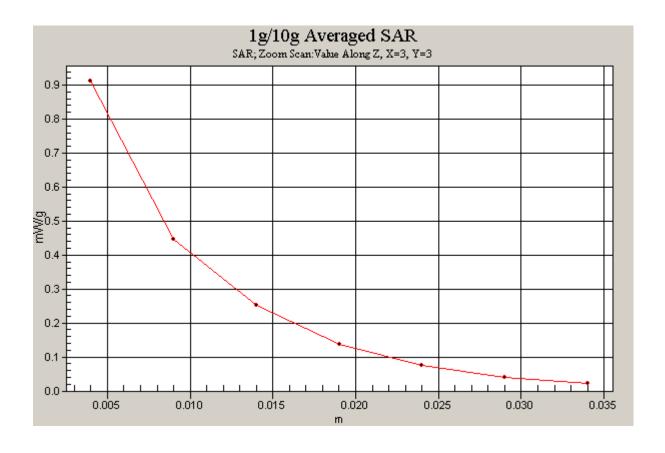


Figure 14 Z-Scan at power reference point (802.11b with BenQ Joybook R55V Test Position 1(Antenna Toward Up) Channel 6)

## 802.11b with BenQ Joybook R55V Test Position 1(Antenna Toward Up) Low

Date/Time: 11/14/2009 9:11:16 PM

Communication System: 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2412 MHz;  $\sigma = 1.95$  mho/m;  $\varepsilon_r = 51.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 ℃ Liqiud Temperature: 21.5 ℃

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(3.91, 3.91, 3.91); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 1 Low/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.867 mW/g

Test Position 1 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.1 V/m; Power Drift = 0.062 dB

Peak SAR (extrapolated) = 1.66 W/kg

SAR(1 g) = 0.715 mW/g; SAR(10 g) = 0.337 mW/g

Maximum value of SAR (measured) = 0.781 mW/g

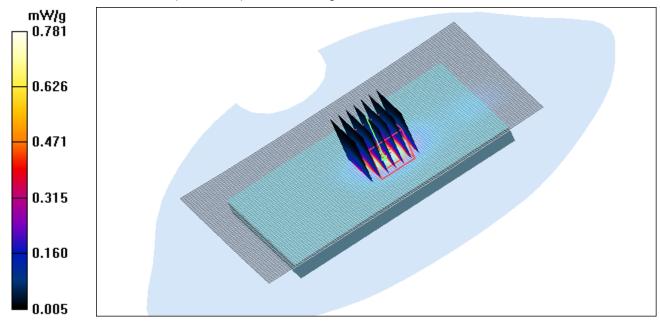


Figure 15 802.11b with BenQ Joybook R55V Test Position 1(Antenna Toward Up) Channel 1

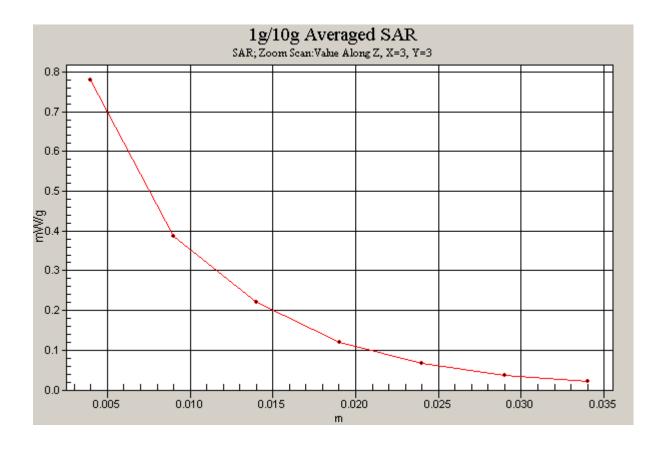


Figure 16 Z-Scan at power reference point (802.11b with BenQ Joybook R55V Test Position 1(Antenna Toward Up) Channel 1)

## 802.11b with BenQ Joybook R55V Test Position 2(Antenna Toward Up) High

Date/Time: 11/15/2009 1:02:15 AM

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2462 MHz;  $\sigma = 2.02 \text{ mho/m}$ ;  $\epsilon_r = 51.7$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Ambient Temperature: 22.3 ℃ Liqiud Temperature: 21.5 ℃

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(3.91, 3.91, 3.91); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Test Position 2 High/Area Scan (61x121x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.09 mW/g

Test Position 2 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.42 V/m; Power Drift = -0.014 dB

Peak SAR (extrapolated) = 2.26 W/kg

SAR(1 g) = 0.938 mW/g; SAR(10 g) = 0.439 mW/g

Maximum value of SAR (measured) = 1.03 mW/g

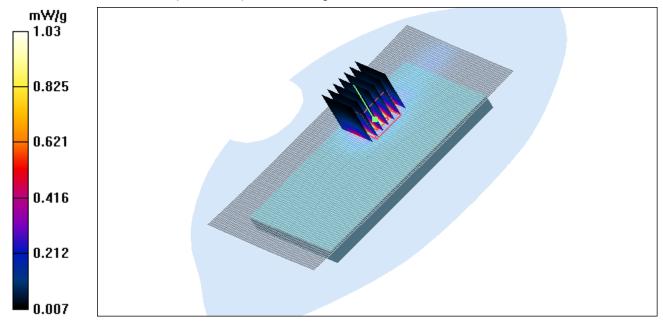


Figure 17 802.11b with BenQ Joybook R55V Test Position 2(Antenna Toward Up) Channel 11

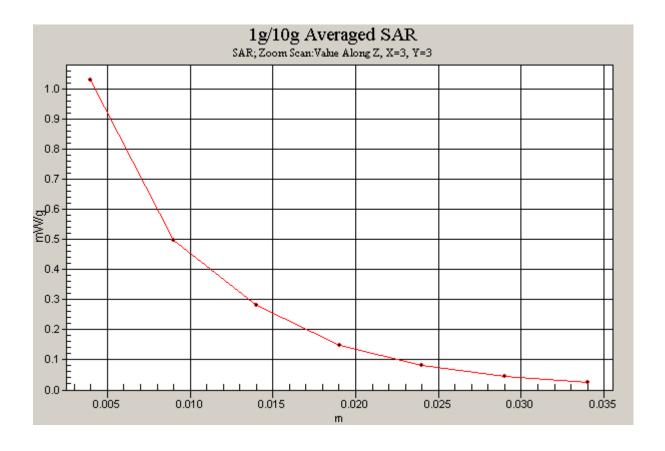


Figure 18 Z-Scan at power reference point (802.11b with BenQ Joybook R55V Test Position 2(Antenna Toward Up) Channel 11)

# 802.11b with BenQ Joybook R55V Test Position 2(Antenna Toward Up) Middle

Date/Time: 11/15/2009 12:34:38 AM

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): f = 2437 MHz;  $\sigma = 1.98$  mho/m;  $\epsilon_r = 51.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

**DASY4** Configuration:

Probe: ET3DV6 - SN1737; ConvF(3.91, 3.91, 3.91); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 2 Middle/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.905 mW/g

Test Position 2 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm,

dz=5mm

Reference Value = 5.80 V/m; Power Drift = 0.121 dB

Peak SAR (extrapolated) = 2.03 W/kg

SAR(1 g) = 0.852 mW/g; SAR(10 g) = 0.396 mW/g

Maximum value of SAR (measured) = 0.945 mW/g

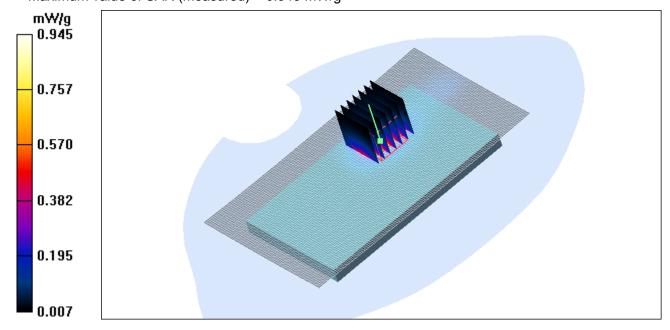


Figure 19 802.11b with BenQ Joybook R55V Test Position 2(Antenna Toward Up) Channel 6

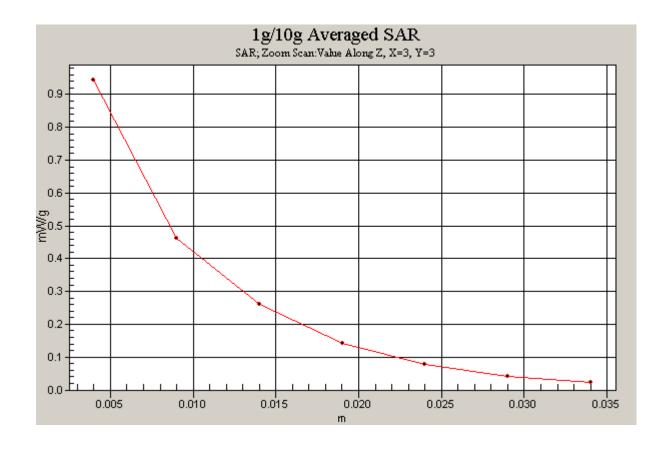


Figure 20 Z-Scan at power reference point (802.11b with BenQ Joybook R55V Test Position 2(Antenna Toward Up) Channel 6)

## 802.11b with BenQ Joybook R55V Test Position 2(Antenna Toward Up) Low

Date/Time: 11/15/2009 1:25:59 AM

Communication System: 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2412 MHz;  $\sigma = 1.95$  mho/m;  $\varepsilon_r = 51.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(3.91, 3.91, 3.91); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 2 Low/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.789 mW/g

Test Position 2 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.90 V/m; Power Drift = 0.021 dB

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.668 mW/g; SAR(10 g) = 0.313 mW/g

Maximum value of SAR (measured) = 0.736 mW/g

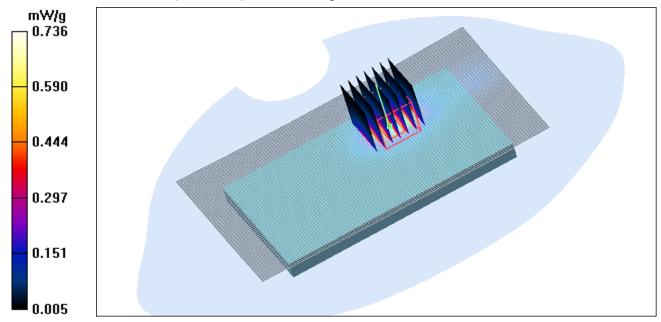


Figure 21 802.11b with BenQ Joybook R55V Test Position 2(Antenna Toward Up) Channel 1

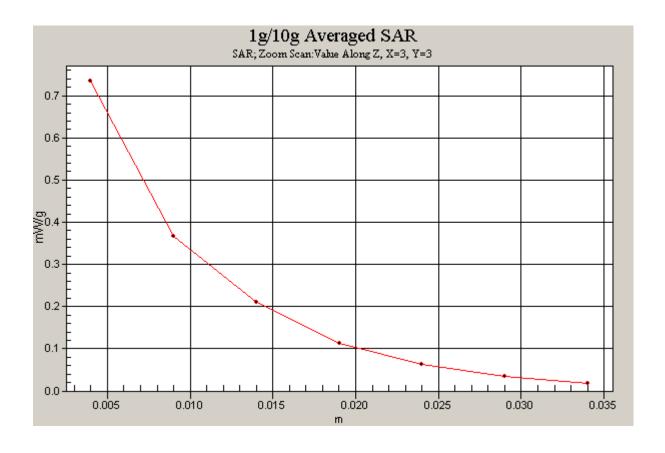


Figure 22 Z-Scan at power reference point (802.11b with BenQ Joybook R55V Test Position 2(Antenna Toward Up) Channel 1)

# 802.11b with BenQ Joybook R55V Test Position 3(Antenna Toward Up) Middle

Date/Time: 11/15/2009 1:15:47 PM

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): f = 2437 MHz;  $\sigma = 1.98$  mho/m;  $\epsilon_r = 51.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 ℃ Liqiud Temperature: 21.5 ℃

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(3.91, 3.91, 3.91); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 3 Middle/Area Scan (31x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.023 mW/g

Test Position 3 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm,

dz=5mm

Reference Value = 3.41 V/m; Power Drift = -0.038 dB

Peak SAR (extrapolated) = 0.049 W/kg

SAR(1 g) = 0.024 mW/g; SAR(10 g) = 0.014 mW/g

Maximum value of SAR (measured) = 0.025 mW/g

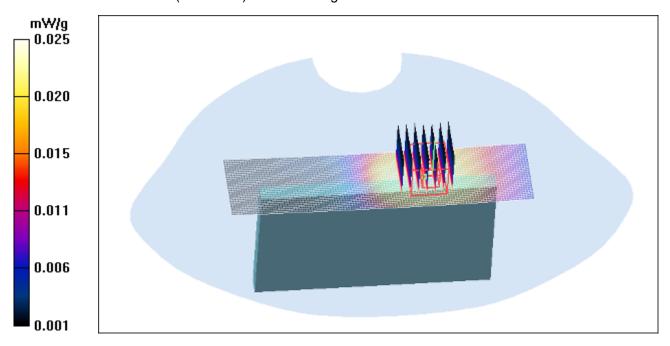


Figure 23 802.11b with BenQ Joybook R55V Test Position 3(Antenna Toward Up) Channel 6

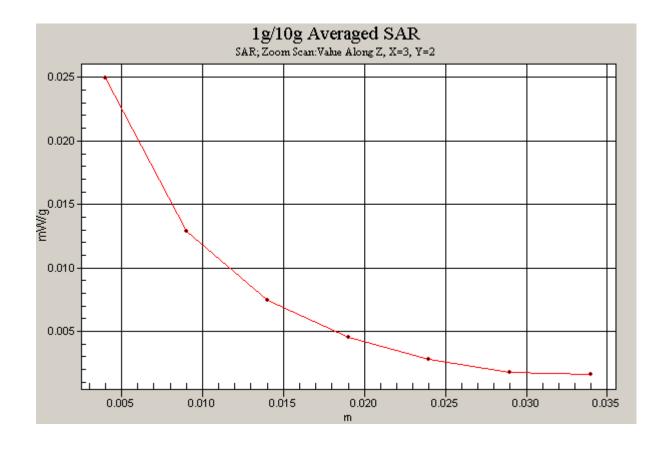


Figure 24 Z-Scan at power reference point (802.11b with BenQ Joybook R55V Test Position 3(Antenna Toward Up) Channel 6)

## 802.11b with BenQ Joybook R55V Test Position 4(Antenna Toward Up) High

Date/Time: 11/15/2009 2:13:30 AM

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2462 MHz;  $\sigma = 2.02 \text{ mho/m}$ ;  $\epsilon_r = 51.7$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Ambient Temperature: 22.3 ℃ Liqiud Temperature: 21.5 ℃

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(3.91, 3.91, 3.91); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 High/Area Scan (41x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.24 mW/g

Test Position 4 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.9 V/m; Power Drift = -0.111 dB

Peak SAR (extrapolated) = 2.69 W/kg

SAR(1 g) = 1.11 mW/g; SAR(10 g) = 0.526 mW/g

Maximum value of SAR (measured) = 1.18 mW/g

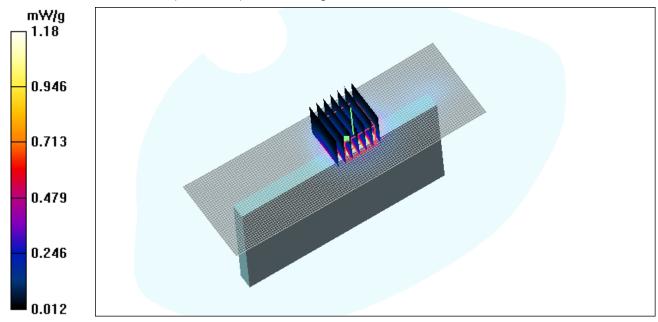


Figure 25 802.11b with BenQ Joybook R55V Test Position 4(Antenna Toward Up) Channel 11

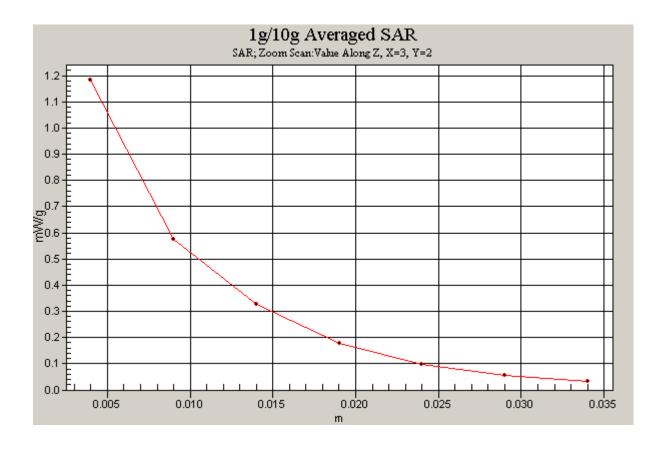


Figure 26 Z-Scan at power reference point (802.11b with BenQ Joybook R55V Test Position 4(Antenna Toward Up) Channel 11)

# 802.11b with BenQ Joybook R55V Test Position 4(Antenna Toward Up) Middle

Date/Time: 11/15/2009 1:53:05 AM

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): f = 2437 MHz;  $\sigma = 1.98$  mho/m;  $\epsilon_r = 51.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(3.91, 3.91, 3.91); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 Middle/Area Scan (41x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.902 mW/g

Test Position 4 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm,

dz=5mm

Reference Value = 16.7 V/m; Power Drift = 0.144 dB

Peak SAR (extrapolated) = 2.08 W/kg

SAR(1 g) = 0.884 mW/g; SAR(10 g) = 0.423 mW/g

Maximum value of SAR (measured) = 0.962 mW/g

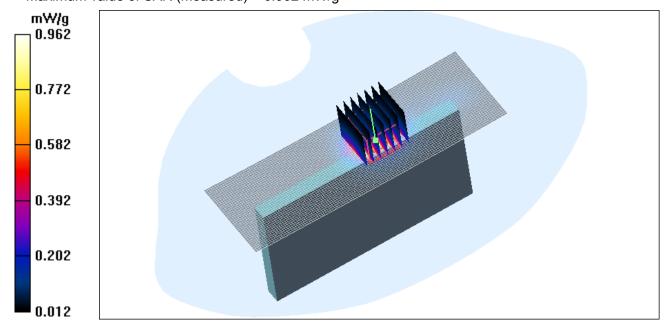


Figure 27 802.11b with BenQ Joybook R55V Test Position 4(Antenna Toward Up) Channel 6

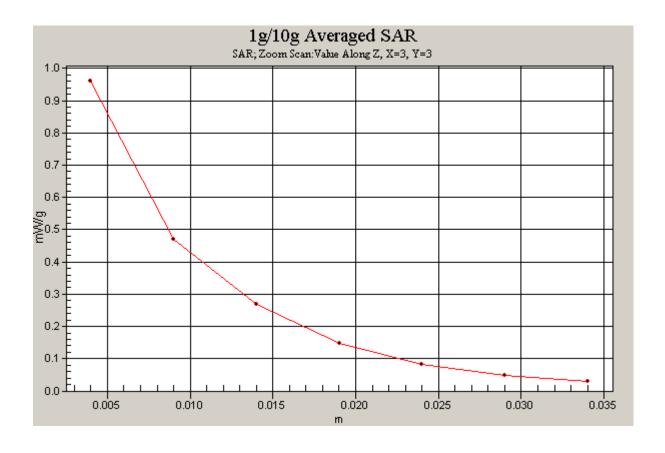


Figure 28 Z-Scan at power reference point (802.11b with BenQ Joybook R55V Test Position 4(Antenna Toward Up) Channel 6)

## 802.11b with BenQ Joybook R55V Test Position 4(Antenna Toward Up) Low

Date/Time: 11/15/2009 2:35:15 AM

Communication System: 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2412 MHz;  $\sigma = 1.95$  mho/m;  $\varepsilon_r = 51.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 ℃ Liqiud Temperature: 21.5 ℃

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(3.91, 3.91, 3.91); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 Low/Area Scan (41x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.788 mW/g

Test Position 4 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.7 V/m; Power Drift = 0.035 dB

Peak SAR (extrapolated) = 1.64 W/kg

SAR(1 g) = 0.707 mW/g; SAR(10 g) = 0.339 mW/g

Maximum value of SAR (measured) = 0.772 mW/g

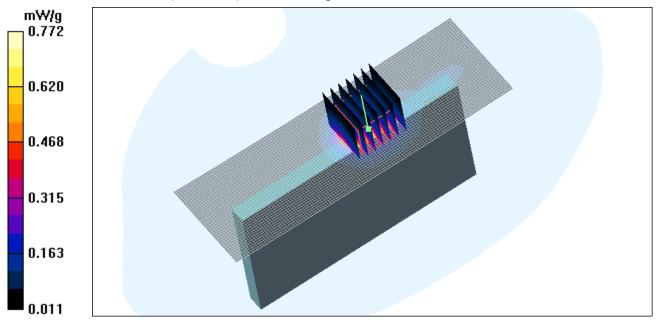


Figure 29 802.11b with BenQ Joybook R55V Test Position 4(Antenna Toward Up) Channel 1

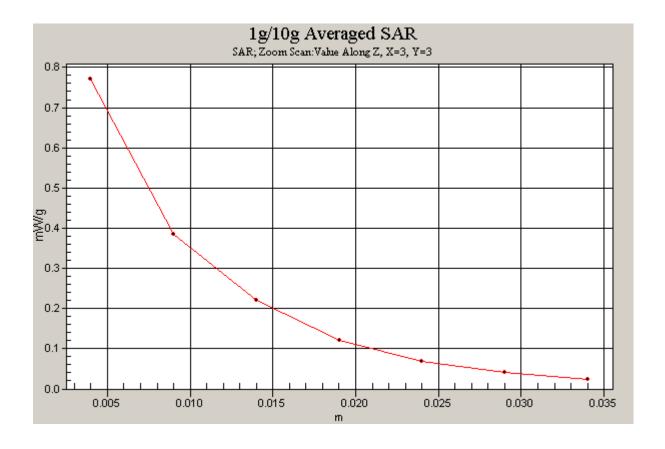


Figure 30 Z-Scan at power reference point (802.11b with BenQ Joybook R55V Test Position 4 (Antenna Toward Up) Channel 1)

#### 802.11b with BenQ Joybook R55V Test Position 5(Antenna Toward straight) Middle

Date/Time: 11/14/2009 10:58:11 AM

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): f = 2437 MHz;  $\sigma = 1.98$  mho/m;  $\epsilon_r = 51.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

**DASY4** Configuration:

Probe: ET3DV6 - SN1737; ConvF(3.91, 3.91, 3.91); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 5 Middle/Area Scan (41x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.326 mW/g

Test Position 5 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm,

dz=5mm

Reference Value = 11.4 V/m; Power Drift = 0.177 dB

Peak SAR (extrapolated) = 0.492 W/kg

SAR(1 g) = 0.264 mW/g; SAR(10 g) = 0.137 mW/g

Maximum value of SAR (measured) = 0.293 mW/g

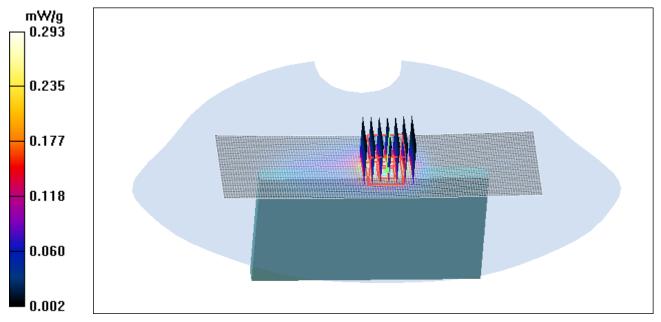


Figure 31 802.11b with BenQ Joybook R55V Test Position 5(Antenna Toward straight) Channel

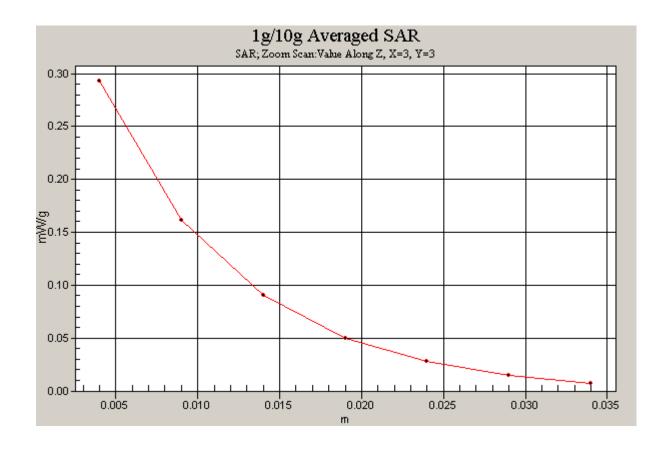


Figure 32 Z-Scan at power reference point (802.11b with BenQ Joybook R55V Test Position 5 (Antenna Toward straight) Channel 6)

## 802.11g with BenQ Joybook R55V Test Position 1(Antenna Toward Up) High

Date/Time: 11/14/2009 4:00:59 PM

Communication System: 802.11g; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2462 MHz;  $\sigma = 2.02$  mho/m;  $\varepsilon_r = 51.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 ℃ Liqiud Temperature: 21.5 ℃

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(3.91, 3.91, 3.91); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 1 High/Area Scan (71x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.810 mW/g

Test Position 1 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.48 V/m; Power Drift = -0.057 dB

Peak SAR (extrapolated) = 1.97 W/kg

SAR(1 g) = 0.748 mW/g; SAR(10 g) = 0.342 mW/g

Maximum value of SAR (measured) = 0.795 mW/g

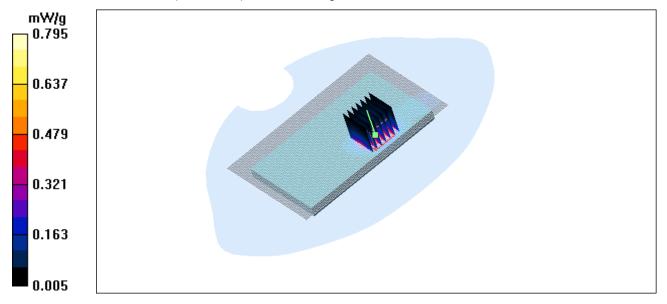


Figure 33 802.11g with BenQ Joybook R55V Test Position 1(Antenna Toward Up) Channel 11

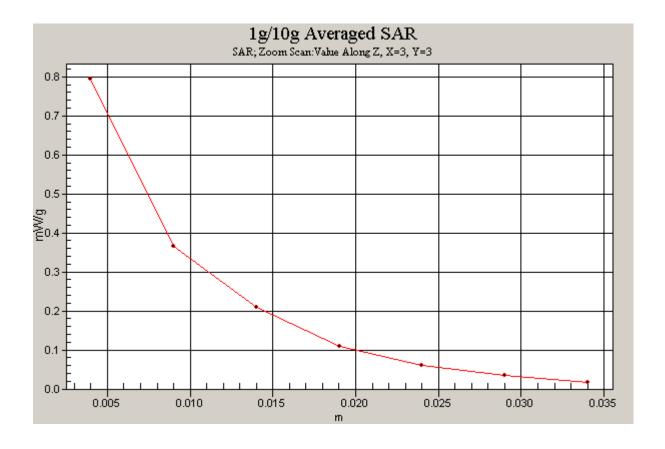


Figure 34 Z-Scan at power reference point (802.11g with BenQ Joybook R55V Test Position 1(Antenna Toward Up) Channel 11)

# 802.11n HT20 with BenQ Joybook R55V Test Position 1(Antenna Toward Back) Middle

Date/Time: 11/15/2009 2:06:47 PM

Communication System: 802.11n; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): f = 2437 MHz;  $\sigma = 1.98$  mho/m;  $\epsilon_r = 51.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(3.91, 3.91, 3.91); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 1 Middle/Area Scan (71x71x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.014 mW/g

**Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.26 V/m; Power Drift = -0.069 dB

Peak SAR (extrapolated) = 0.031 W/kg

SAR(1 g) = 0.013 mW/g; SAR(10 g) = 0.006 mW/g

Maximum value of SAR (measured) = 0.015 mW/g

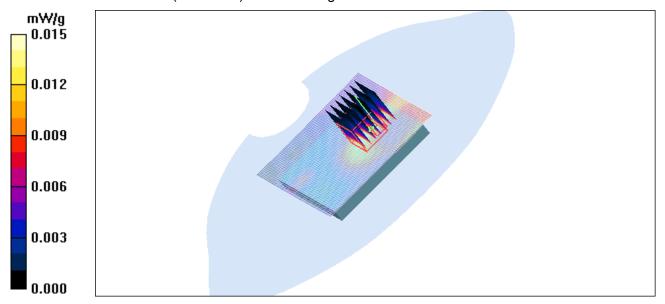


Figure 35 802.11n HT20 with BenQ Joybook R55V Test Position 1(Antenna Toward Back)
Channel 6

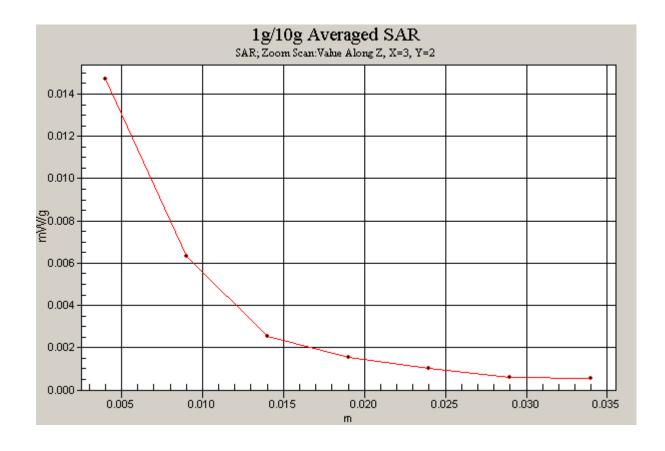


Figure 36 Z-Scan at power reference point (802.11n HT20 with BenQ Joybook R55V Test Position 1(Antenna Toward Back) Channel 6)

# 802.11n HT20 with BenQ Joybook R55V Test Position 1(Antenna Toward Up) High

Date/Time: 11/14/2009 5:04:27 PM

Communication System: 802.11g; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2462 MHz;  $\sigma = 2.02 \text{ mho/m}$ ;  $\epsilon_r = 51.7$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Ambient Temperature: 22.3 ℃ Liqiud Temperature: 21.5 ℃

Phantom section: Flat Section

**DASY4** Configuration:

Probe: ET3DV6 - SN1737; ConvF(3.91, 3.91, 3.91); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 1 High/Area Scan (71x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.499 mW/g

Test Position 1 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.44 V/m; Power Drift = -0.040 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.422 mW/g; SAR(10 g) = 0.194 mW/g

Maximum value of SAR (measured) = 0.463 mW/g

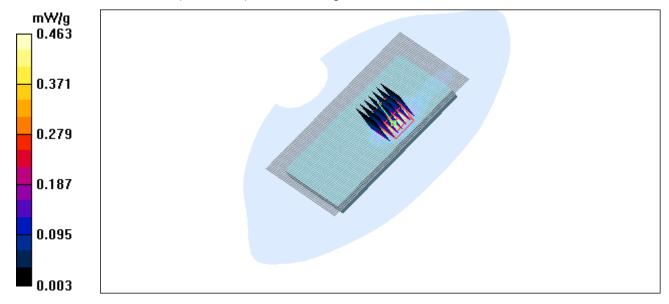


Figure 37 802.11n HT20 with BenQ Joybook R55V Test Position 1(Antenna Toward Up)
Channel 11

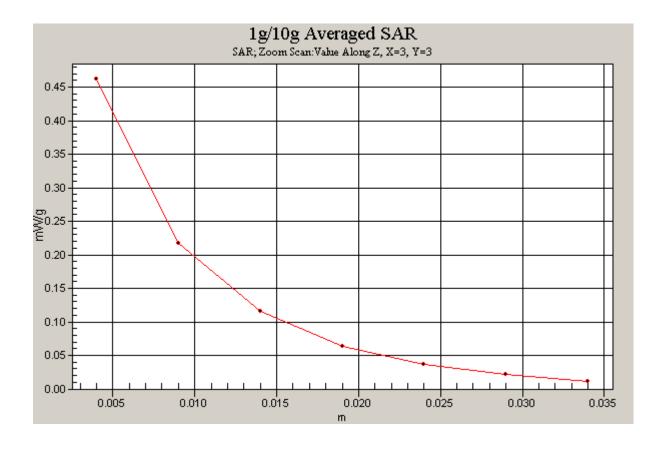


Figure 38 Z-Scan at power reference point (802.11n HT20 with BenQ Joybook R55V Test Position 1(Antenna Toward Up) Channel 11)

# 802.11n HT20 with BenQ Joybook R55V Test Position 1(Antenna Toward Up) Middle

Date/Time: 11/15/2009 2:32:03 PM

Communication System: 802.11n; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): f = 2437 MHz;  $\sigma = 1.98$  mho/m;  $\epsilon_r = 51.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(3.91, 3.91, 3.91); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 1 Middle/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.958 mW/g

**Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.1 V/m; Power Drift = 0.045 dB

Peak SAR (extrapolated) = 2.25 W/kg

SAR(1 g) = 0.929 mW/g; SAR(10 g) = 0.429 mW/g

Maximum value of SAR (measured) = 1.02 mW/g

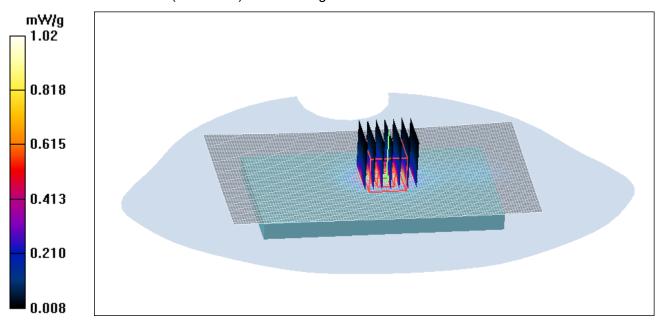


Figure 39 802.11n HT20 with BenQ Joybook R55V Test Position 1(Antenna Toward Up)

Channel 6

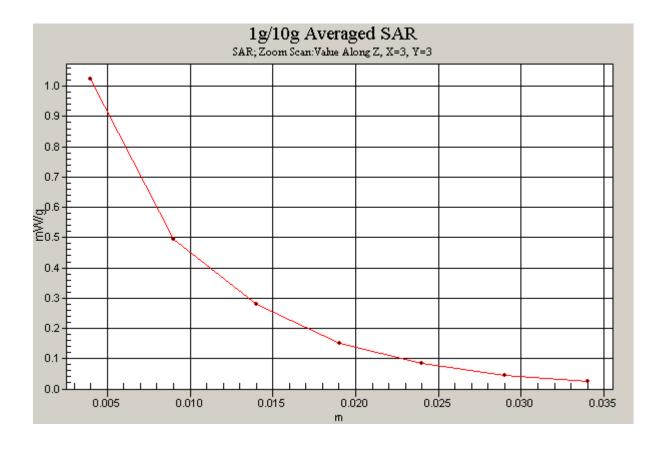


Figure 40 Z-Scan at power reference point (802.11n HT20 with BenQ Joybook R55V Test Position 1(Antenna Toward Up) Channel 6)

# 802.11n HT20 with BenQ Joybook R55V Test Position 1(Antenna Toward Up) Low

Date/Time: 11/14/2009 4:36:09 PM

Communication System: 802.11g; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2412 MHz;  $\sigma = 1.95 \text{ mho/m}$ ;  $\epsilon_r = 51.9$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Ambient Temperature: 22.3 ℃ Liqiud Temperature: 21.5 ℃

Phantom section: Flat Section

**DASY4** Configuration:

Probe: ET3DV6 - SN1737; ConvF(3.91, 3.91, 3.91); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 1/Area Scan (71x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.367 mW/g

Test Position 1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.37 V/m; Power Drift = -0.080 dB

Peak SAR (extrapolated) = 0.790 W/kg

SAR(1 g) = 0.315 mW/g; SAR(10 g) = 0.146 mW/g

Maximum value of SAR (measured) = 0.343 mW/g

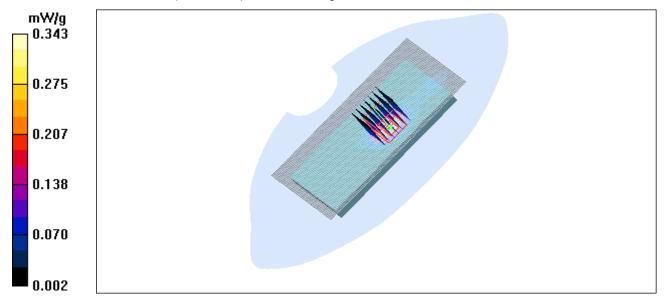


Figure 41 802.11n HT20 with BenQ Joybook R55V Test Position 1(Antenna Toward Up)

Channel 1

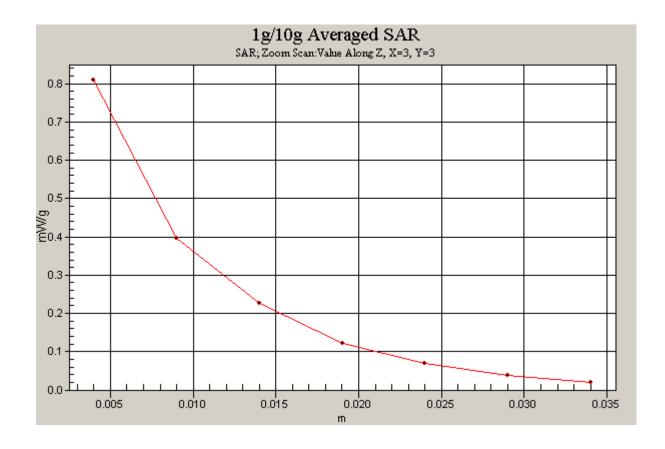


Figure 42 Z-Scan at power reference point (802.11n HT20 with BenQ Joybook R55V Test Position 1(Antenna Toward Up) Channel 1)

# 802.11n HT20 with BenQ Joybook R55V Test Position 2(Antenna Toward Up) Middle

Date/Time: 11/15/2009 10:36:01 AM

Communication System: 802.11n; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): f = 2437 MHz;  $\sigma = 1.98$  mho/m;  $\epsilon_r = 51.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liqiud Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(3.91, 3.91, 3.91); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 2 Middle/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.852 mW/g

**Test Position 2 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.32 V/m; Power Drift = -0.072 dB

Peak SAR (extrapolated) = 1.77 W/kg

SAR(1 g) = 0.739 mW/g; SAR(10 g) = 0.340 mW/g

Maximum value of SAR (measured) = 0.807 mW/g

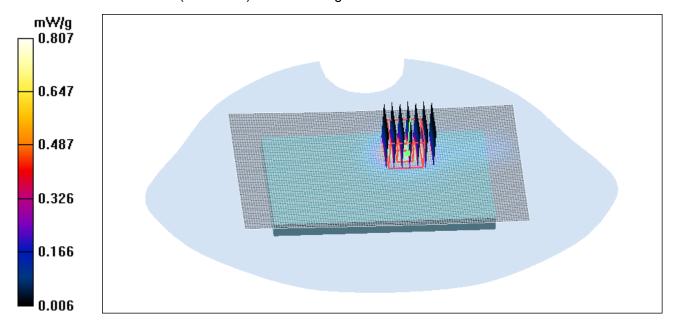


Figure 43 802.11n HT20 with BenQ Joybook R55V Test Position 2(Antenna Toward Up)

Channel 6

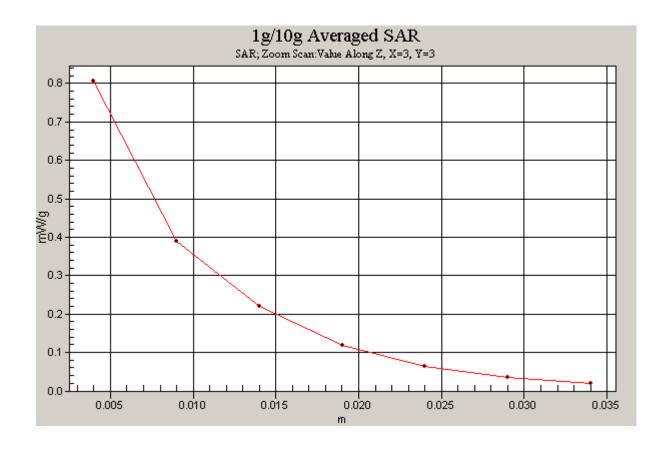


Figure 44 Z-Scan at power reference point (802.11n HT20 with BenQ Joybook R55V Test Position 2(Antenna Toward Up) Channel 6)

# 802.11n HT20 with BenQ Joybook R55V Test Position 3(Antenna Toward Up) Middle

Date/Time: 11/15/2009 12:33:00 PM

Communication System: 802.11n; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): f = 2437 MHz;  $\sigma = 1.98$  mho/m;  $\epsilon_r = 51.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(3.91, 3.91, 3.91); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 3 Middle/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.022 mW/g

**Test Position 3 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.94 V/m; Power Drift = -0.065 dB

Peak SAR (extrapolated) = 0.043 W/kg

SAR(1 g) = 0.020 mW/g; SAR(10 g) = 0.012 mW/g

Maximum value of SAR (measured) = 0.021 mW/g

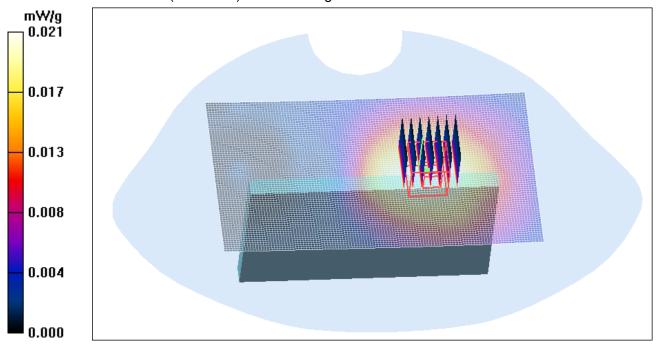


Figure 45 802.11n HT20 with BenQ Joybook R55V Test Position 3(Antenna Toward Up)

Channel 6

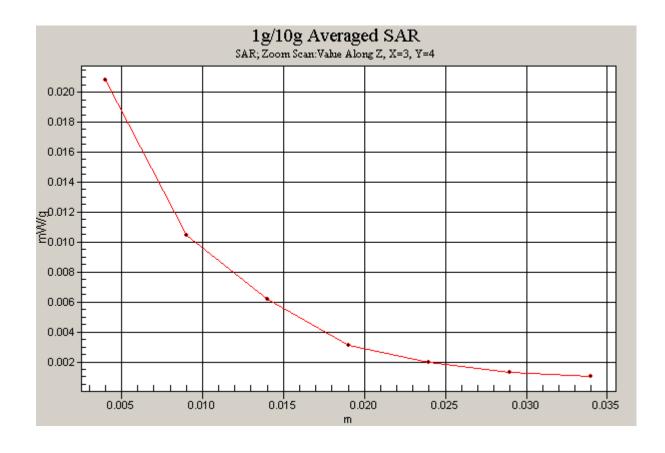


Figure 46 Z-Scan at power reference point (802.11n HT20 with BenQ Joybook R55V Test Position 3(Antenna Toward Up) Channel 6)

## 802.11n HT20 with BenQ Joybook R55V Test Position 4(Antenna Toward Up) High

Date/Time: 11/14/2009 6:59:55 PM

Communication System: 802.11n; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2462 MHz;  $\sigma = 2.02 \text{ mho/m}$ ;  $\epsilon_r = 51.7$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Ambient Temperature: 22.3 ℃ Liqiud Temperature: 21.5 ℃

Phantom section: Flat Section

**DASY4** Configuration:

Probe: ET3DV6 - SN1737; ConvF(3.91, 3.91, 3.91); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 High /Area Scan (51x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.598 mW/g

Test Position 4 High /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.85 V/m; Power Drift = 0.088 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.480 mW/g; SAR(10 g) = 0.231 mW/g

Maximum value of SAR (measured) = 0.515 mW/g

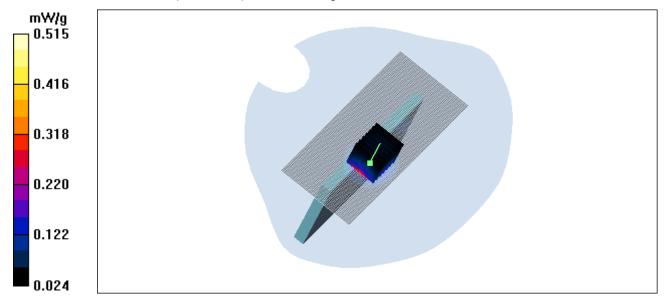


Figure 47 802.11n HT20 with BenQ Joybook R55V Test Position 4(Antenna Toward Up)
Channel 11

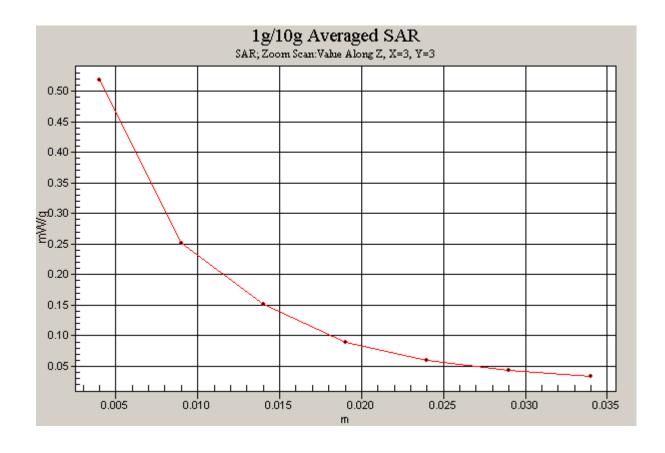


Figure 48 Z-Scan at power reference point (802.11n HT20 with BenQ Joybook R55V Test Position 4(Antenna Toward Up) Channel 11)

# 802.11n HT20 with BenQ Joybook R55V Test Position 4(Antenna Toward Up) Middle

Date/Time: 11/15/2009 11:05:25 AM

Communication System: 802.11n; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): f = 2437 MHz;  $\sigma = 1.98$  mho/m;  $\epsilon_r = 51.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liqiud Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(3.91, 3.91, 3.91); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 Middle/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.967 mW/g

**Test Position 4 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.0 V/m; Power Drift = -0.038 dB

Peak SAR (extrapolated) = 1.99 W/kg

SAR(1 g) = 0.837 mW/g; SAR(10 g) = 0.393 mW/g

Maximum value of SAR (measured) = 0.906 mW/g

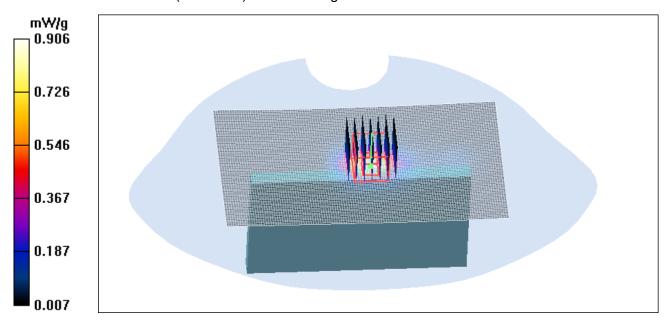


Figure 49 802.11n HT20 with BenQ Joybook R55V Test Position 4(Antenna Toward Up)

Channel 6

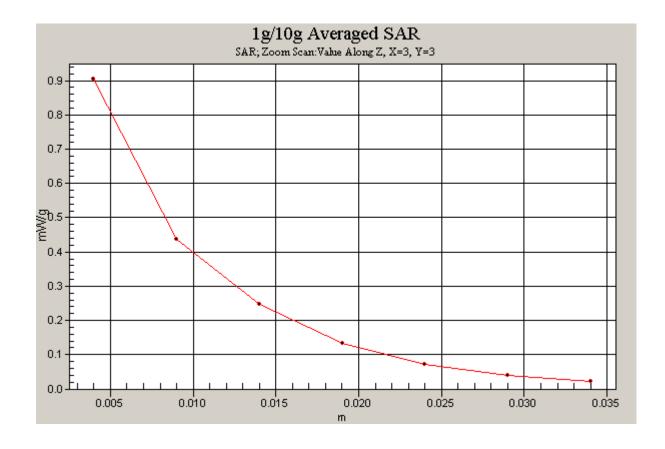


Figure 50 Z-Scan at power reference point (802.11n HT20 with BenQ Joybook R55V Test Position 4(Antenna Toward Up) Channel 6)

### 802.11n HT20 with BenQ Joybook R55V Test Position 4(Antenna Toward Up) Low

Date/Time: 11/14/2009 6:27:46 PM

Communication System: 802.11n; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2412 MHz;  $\sigma = 1.95 \text{ mho/m}$ ;  $\epsilon_r = 51.9$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

**DASY4** Configuration:

Probe: ET3DV6 - SN1737; ConvF(3.91, 3.91, 3.91); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 Low /Area Scan (51x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.409 mW/g

Test Position 4 Low /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.62 V/m; Power Drift = -0.013 dB

Peak SAR (extrapolated) = 0.889 W/kg

SAR(1 g) = 0.351 mW/g; SAR(10 g) = 0.162 mW/g

Maximum value of SAR (measured) = 0.379 mW/g

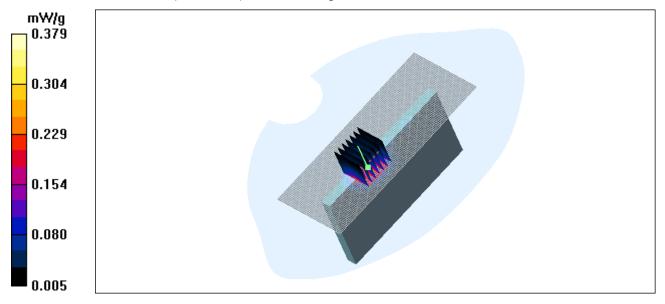


Figure 51 802.11n HT20 with BenQ Joybook R55V Test Position 4(Antenna Toward Up)

Channel 1

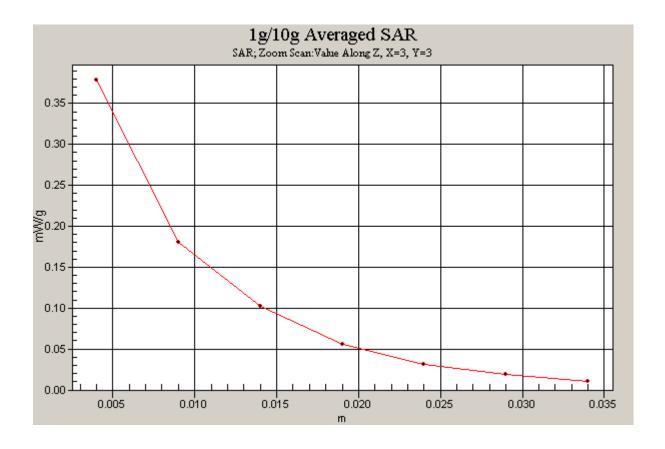


Figure 52 Z-Scan at power reference point (802.11n HT20 with BenQ Joybook R55V Test Position 4(Antenna Toward Up) Channel 1)

# 802.11n HT20 with BenQ Joybook R55V Test Position 5(Antenna Toward straight) Middle

Date/Time: 11/14/2009 11:18:57 AM

Communication System: 802.11n; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): f = 2437 MHz;  $\sigma = 1.98 \text{ mho/m}$ ;  $\epsilon_r = 51.8$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(3.91, 3.91, 3.91); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 5 Middle/Area Scan (41x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.311 mW/g

**Test Position 5 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.8 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 0.520 W/kg

SAR(1 g) = 0.276 mW/g; SAR(10 g) = 0.143 mW/g

Maximum value of SAR (measured) = 0.310 mW/g

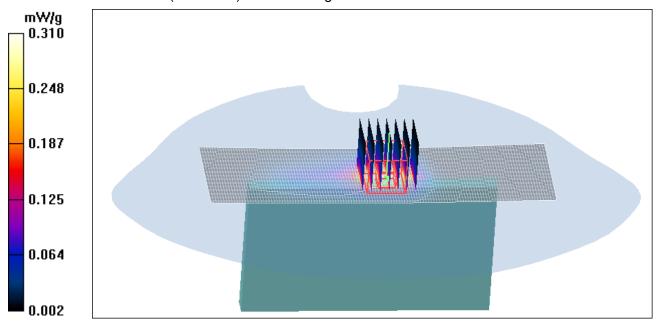


Figure 53 802.11n HT20 with BenQ Joybook R55V Test Position 5(Antenna Toward straight)

Channel 6

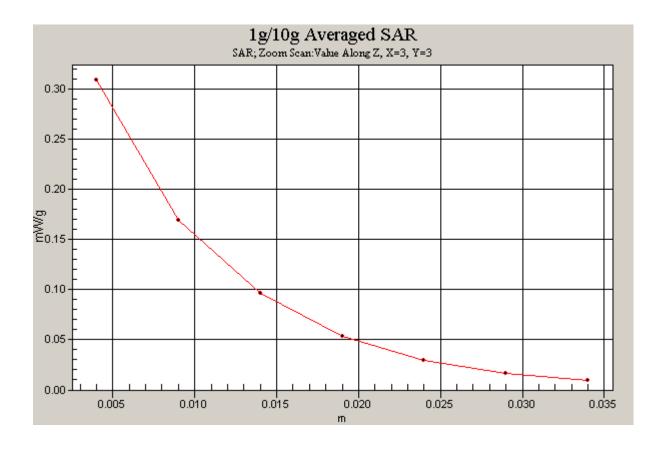


Figure 54 Z-Scan at power reference point (802.11n HT20 with BenQ Joybook R55V Test Position 5 (Antenna Toward straight) Channel 6)

# 802.11n HT40 with BenQ Joybook R55V Test Position 1(Antenna Toward Up) Middle

Date/Time: 11/14/2009 5:42:34 PM

Communication System: 802.11n(HT40); Frequency: 2427 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): f = 2427 MHz;  $\sigma = 1.97 \text{ mho/m}$ ;  $\epsilon_r = 51.8$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(3.91, 3.91, 3.91); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Test Position 1 Middle/Area Scan (71x121x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.612 mW/g

**Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.25 V/m; Power Drift = 0.071 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.523 mW/g; SAR(10 g) = 0.240 mW/g

Maximum value of SAR (measured) = 0.560 mW/g

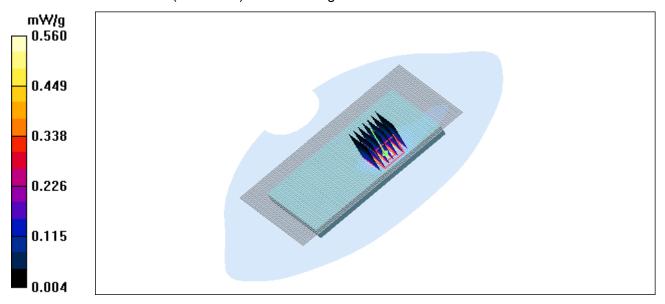


Figure 55 802.11n HT40 with BenQ Joybook R55V Test Position 1(Antenna Toward Up)

Channel 4

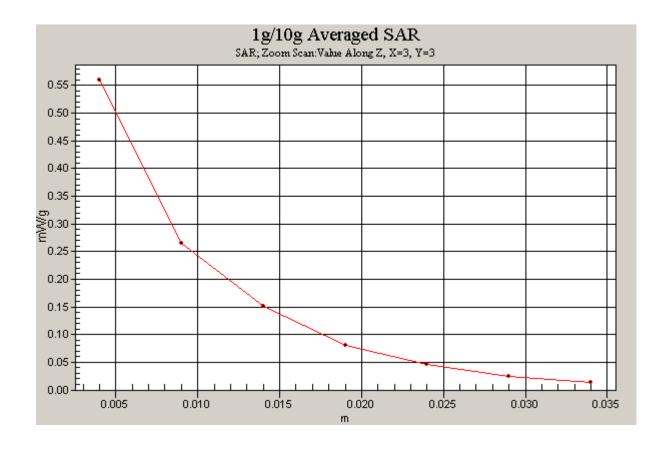


Figure 56 Z-Scan at power reference point (802.11n HT40 with BenQ Joybook R55V Test Position 1(Antenna Toward Up) Channel 4)

### **ANNEX D: Probe Calibration Certificate**

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst Service suisse d'étalonnage Servizio svizzero di taratura Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

TA Shanghai (Auden)

Certificate No: ET3-1737\_Nov08

Accreditation No.: SCS 108

### **CALIBRATION CERTIFICATE** ET3DV6 - SN:1737 Object Calibration procedure(s) QA CAL-01.v6, QA CAL-12.v5 and QA CAL-23.v3 Calibration procedure for dosimetric E-field probes Calibration date: November 25, 2008 Condition of the calibrated item In Tolerance This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate. All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%. Calibration Equipment used (M&TE critical for calibration) Primary Standards ID# Cal Date (Certificate No.) Scheduled Calibration Power meter E4419B GB41293874 1-Apr-08 (No. 217-00788) Apr-09 Power sensor E4412A MY41495277 1-Apr-08 (No. 217-00788) Apr-09 Power sensor E4412A MY41498087 1-Apr-08 (No. 217-00788) Apr-09 Reference 3 dB Attenuator SN: S5054 (3c) 1-Jul-08 (No. 217-00865) Jul-09 Reference 20 dB Attenuator SN: S5086 (20b) 31-Mar-08 (No. 217-00787) Apr-09 SN: S5129 (30b) Reference 30 dB Attenuator 1-Jul-08 (No. 217-00866) Jul-09 Reference Probe ES3DV2 SN: 3013 2-Jan-08 (No. ES3-3013\_Jan08) Jan-09 DAE4 SN: 660 9-Sep-08 (No. DAE4-660\_Sep08) Sep-09 Secondary Standards ID# Check Date (in house) Scheduled Check RF generator HP 8648C US3642U01700 4-Aug-99 (in house check Oct-07) In house check: Oct-09 Network Analyzer HP 8753E US37390585 16-Oct-01 (in house check Oct-08) In house check: Oct-09 Function Calibrated by: Katja Pokovic **Technical Manager** Approved by: Issued: November 25, 2008 This calibration certificate shall not be reproduced except in full without written approval of the laboratory

Certificate No: ET3-1737 Nov08

Page 1 of 9

### Calibration Laboratory of Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst Service suisse d'étalonnage C Servizio svizzero di taratura Swiss Calibration Service

Accreditation No.: SCS 108

Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

### Glossary:

TSL NORMx,y,z

ConvF

tissue simulating liquid sensitivity in free space sensitivity in TSL / NORMx,y,z

DCP Polarization @ Polarization 9 diode compression point φ rotation around probe axis

9 rotation around an axis that is in the plane normal to probe axis (at

measurement center), i.e., 9 = 0 is normal to probe axis

### Calibration is Performed According to the Following Standards:

a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003

b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

### Methods Applied and Interpretation of Parameters:

- NORMx,y,z: Assessed for E-field polarization 9 = 0 (f ≤ 900 MHz in TEM-cell; f > 1800 MHz: R22 waveguide). NORMx,y,z are only intermediate values, i.e., the uncertainties of NORMx,y,z does not effect the E2-field uncertainty inside TSL (see below ConvF).
- NORM(f)x,y,z = NORMx,y,z \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCPx,y,z: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for f ≤ 800 MHz) and inside waveguide using analytical field distributions based on power measurements for f > 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORMx,y,z \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm$  50 MHz to  $\pm$  100 MHz.
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

November 25, 2008

# Probe ET3DV6

SN:1737

Manufactured:

September 27, 2002

Last calibrated:

February 19, 2007

Repaired:

November 18, 2008

Recalibrated:

November 25, 2008

### Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

November 25, 2008

## DASY - Parameters of Probe: ET3DV6 SN:1737

Sensitivity in Free Space <sup>A</sup>			Diode Compression <sup>B</sup>		
No	rmX	1.42 ± 10.1%	$\mu V/(V/m)^2$	DCP X	93 mV
No	rmY	1.68 ± 10.1%	$\mu V/(V/m)^2$	DCP Y	94 mV
No	rmZ	1.63 ± 10.1%	$\mu V/(V/m)^2$	DCP Z	85 mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

### **Boundary Effect**

900 MHz Typical SAR gradient: 5 % per mm

Sensor Center to Phantom Surface Distance		3.7 mm	4.7 mm
SAR <sub>be</sub> [%]	Without Correction Algorithm	10.7	6.9
SAR <sub>be</sub> [%]	With Correction Algorithm	0.3	0.4

### TSL

1750 MHz

Typical SAR gradient: 10 % per mm

Sensor Cente	er to Phantom Surface Distance	3.7 mm	4.7 mm
SAR <sub>be</sub> [%]	Without Correction Algorithm	12.5	8.4
SAR <sub>be</sub> [%]	With Correction Algorithm	0.8	0.5

### Sensor Offset

Probe Tip to Sensor Center

2.7 mm

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.


<sup>&</sup>lt;sup>A</sup> The uncertainties of NormX,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Page 8).

Numerical linearization parameter; uncertainty not required.

November 25, 2008

## Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

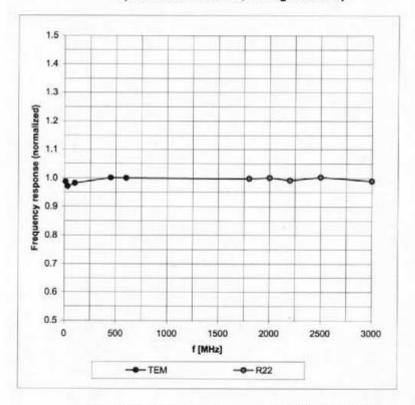



Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)

November 25, 2008

## Receiving Pattern ( $\phi$ ), $\theta = 0^{\circ}$

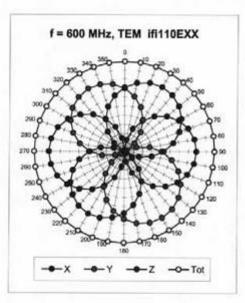

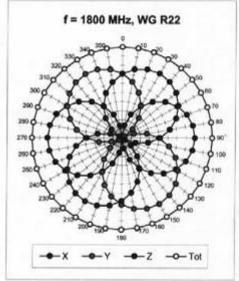

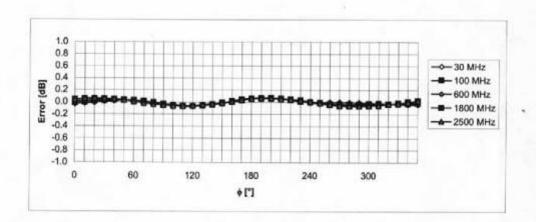



Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)

November 25, 2008

# Dynamic Range f(SAR<sub>head</sub>)

(Waveguide R22, f = 1800 MHz)

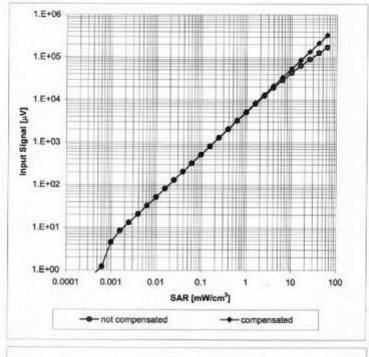


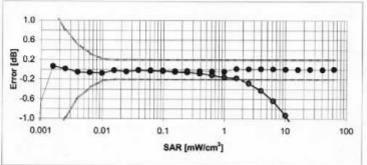


Uncertainty of Linearity Assessment: ± 0.6% (k=2)

November 25, 2008

### **Conversion Factor Assessment**

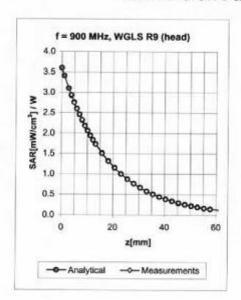

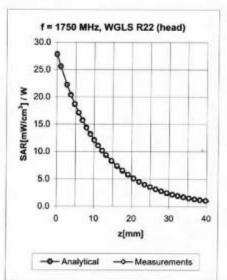

f [MHz]	Validity [MHz] <sup>c</sup>	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
450	± 50 / ± 100	Head	43.5 ± 5%	0.87 ± 5%	0.36	1.84	7.20 ± 13.3% (k=2)
835	±50/±100	Head	$41.5\pm5\%$	0.90 ± 5%	0.25	3.53	6.33 ± 11.0% (k=2)
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.27	3.53	6.14 ± 11.0% (k=2)
1750	± 50 / ± 100	Head	40.1 ± 5%	1.37 ± 5%	0.56	2.77	5.35 ± 11.0% (k=2)
1950	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.57	2.72	4.89 ± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	$1.80\pm5\%$	0.51	1.60	4.39 ± 11.0% (k=2)
450	± 50 / ± 100	Body	56.7 ± 5%	0.94 ± 5%	0.27	1.80	7.52 ± 13.3% (k=2)
835	± 50 / ± 100	Body	55.2 ± 5%	0.97 ± 5%	0.36	2.75	6.14 ± 11.0% (k=2)
900	±50/±100	Body	55.0 ± 5%	1.05 ± 5%	0.43	2.51	5.98 ± 11.0% (k=2)
1750	± 50 / ± 100	Body	53.4 ± 5%	1.49 ± 5%	0.99	1.74	4.84 ± 11.0% (k=2)
1950	± 50 / ± 100	Body	$53.3 \pm 5\%$	1.52 ± 5%	0.99	1.50	4.60 ± 11.0% (k=2)
2450	± 50 / ± 100	Body	$52.7 \pm 5\%$	1.95 ± 5%	0.98	1,42	3.91 ± 11.0% (k=2)


<sup>&</sup>lt;sup>6</sup> The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

Certificate No: ET3-1737\_Nov08

November 25, 2008

## Deviation from Isotropy in HSL

Error (¢, 3), f = 900 MHz

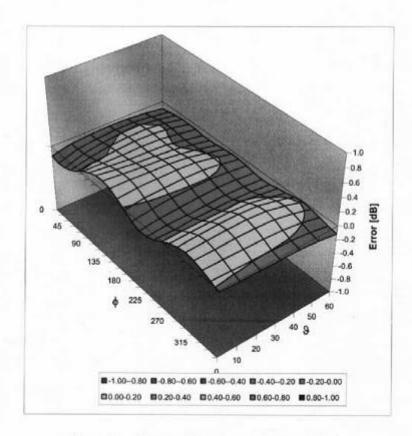

Uncertainty of Spherical Isotropy Assessment: ± 2.6% (k=2)

## **ANNEX E: D2450V2 Dipole Calibration Certificate**



CALIBRATION CERTIFICATE

Object

D2450V2 - SN: 786

Calibration Procedure(s)

TMC-XZ-01-027

Calibration procedure for dipole validation kits

Calibration date:

July 15, 2009

Condition of the calibrated item

In Tolerance

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature( $22\pm3$ ) $\mathbb{T}$  and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID#	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRVD	101253	19-Jun-09 (TMC, No. JZ09-248)	Jun-10
Power sensor NRV-Z5	100333	19-Jun-09 (TMC, No. JZ09-248)	Jun-10
Reference Probe ES3DV3	SN 3149	08-Dec-08(SPEAG, No.ES3-3149_Dec08)	Dec-09
DAE4	SN 771	21-Nov-08(SPEAG, No.DAE4-771_Nov08)	Nov-09
RF generator E4438C	MY45092	879 18-Jun-09(TMC, No.JZ09-302)	Jun-10
Network Analyzer 8753E	US384332	12 03-Aug-08(TMC, No.JZ08-056)	Aug-09

1.5000 100	Name	Function	Signature
Calibrated by:	Lin Hao	SAR Test Engineer	献若
Reviewed by:	Qi Dianyuan	SAR Project Leader	Arong.
Approved by:	Lu Bingsong	Deputy Director of the laboratory	Be wisty

Issued: July 15, 2009

This calibration certificate shall not be reproduced except in full without written approval of the laboratoty.

Certificate No: D2450V2-786\_JUL09

Page 1 of 9

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2009-1293 Page 91of 107

### Glossary:

TSL tissue simulating liquid

ConvF sensitivity in TSL / NORMx,y,z N/A not applicable or not measured

### Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) For hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

### Additional Documentation:

d) DASY System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point
  exactly below the center marking of the flat phantom section, with the arms oriented parallel to
  the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole
  positioned under the liquid filled phantom. The impedance stated is transformed from the
  measurement at the SMA connector to the feed point. The Return Loss ensures low reflected
  power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

Certificate No: D2450V2-786 JUL09 Page 2 of 9

### Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V5.0
Extrapolation	Advanced Extrapolation	
Phantom	2mm Oval Phantom ELI4	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz ± 1 MHz	

### **Head TSL parameters**

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	40.0 ± 6 %	1.78 mho/m ± 6 %
Head TSL temperature during test	(21.9 ± 0.2) °C		

### SAR result with Head TSL

SAR averaged over 1 cm3 (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.3 mW/g
SAR normalized	normalized to 1W	53.2 mW / g
SAR for nominal Head TSL parameters <sup>1</sup>	normalized to 1W	53.7 mW /g ± 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	6.22 mW/g
SAR normalized	normalized to 1W	24.9 mW/g
SAR for nominal Head TSL parameters 1	normalized to 1W	25.0 mW/g ± 16.5 % (k=2)

Certificate No: D2450V2-786\_JUL09 Page 3 of 9

è

Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

## TA Technology (Shanghai) Co., Ltd. **Test Report**

Page 93of 107

Body TSL parameters
The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	52.5 ± 6%	2.02 mho/m ± 6 %
Body TSL temperature during test	(21.8 ± 0.2) °C		

### SAR result with Body TSL

SAR averaged over 1 ${\it cm}^3$ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.1 mW/g
SAR normalized	normalized to 1W	52.4 mW / g
SAR for nominal Body TSL parameters 2	normalized to 1W	52.6 mW /g ± 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	Condition	
SAR measured	250 mW input power	6.18 mW/g
SAR normalized	normalized to 1W	24.7 mW/g
SAR for nominal Body TSL parameters 2	normalized to 1W	24.8 mW /g ± 16.5 % (k=2)

Certificate No: D2450V2-786\_JUL09 Page 4 of 9

<sup>&</sup>lt;sup>2</sup> Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2009-1293

Page 94of 107

### Appendix

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	46.8Ω + 4.0 jΩ	
Return Loss	- 26.8 dB	

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.9Ω + 7.1 jΩ	
Return Loss	- 25.4 dB	

### General Antenna Parameters and Design

000000	
1.155 ns	
	1.155 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### **Additional EUT Data**

Manufactured by	SPEAG
Manufactured on	May 06, 2005

Certificate No: D2450V2-786\_JUL09 Page 5 of 9

### **DASY5 Validation Report for Head TSL**

Date/Time: 2009 7 15 9:15:30

Test Laboratory: TMC, Beijing, China

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: SN: 786

Communication System: CW Frequency: 1800 MHz Duty Cycle: 1:1

Medium: Head 2450MHz

Medium parameters used: f = 2450 MHz;  $\sigma = 1.78 \text{ mho/m}$ ;  $\epsilon_r = 40.0$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

### DASY5 Configuration:

Probe: ES3DV3 - SN3149; ConvF(5.18, 5.18, 5.18); Calibrated: 08.12.08

Electronics: DAE4 Sn771; Calibration: 21.11.08

Phantom: 2mm Oval Phantom ELI4; Type: QDOVA001BB

Measurement SW: DASY5, V5.0 Build 119.9; Postprocessing SW: SEMCAD, V13.2 Build 87

### Pin=250mW; d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 98.1 V/m; Power Drift = -0.057 dB

Peak SAR (extrapolated) = 28.8 W/kg

SAR(1 g) = 13.3 mW/g; SAR(10 g) = 6.22 mW/g


Maximum value of SAR (measured) = 17.1 mW/g

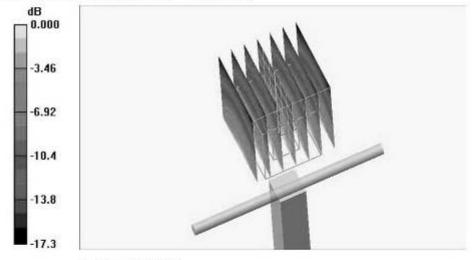

0 dB = 17.1 mW/g

Certificate No: D2450V2-786 JUL09 Page 6 of 9

### Impedance Measurement Plot for Head TSL

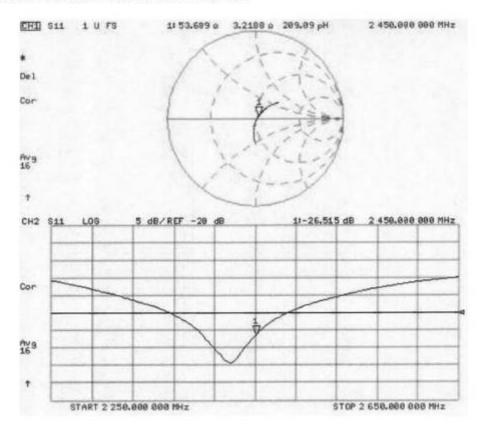

### DASY5 Validation Report for Body TSL

Date/Time: 2009-7-15 10:37:31

Test Laboratory: TMC, Beijing, China

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: SN: 786

Communication System: CW Frequency: 2450 MHz Duty Cycle: 1:1

Medium: Body 1800MHz

Medium parameters used: f = 2450 MHz;  $\sigma = 2.02 \text{ mho/m}$ ;  $\varepsilon_r = 52.5$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

### DASY5 Configuration:

Probe: ES3DV3 - SN3149; ConvF(4.97, 4.97, 4.97); Calibrated: 08.12.08

Electronics: DAE4 Sn771; Calibration: 21.11.08

Phantom: 2mm Oval Phantom ELI4; Type: QDOVA001BB

Measurement SW: DASY5, V5.0 Build 119.9; Postprocessing SW: SEMCAD, V13.2 Build 87

### Pin=250mW; d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.8 V/m; Power Drift = -0.009 dB

Peak SAR (extrapolated) =29.1 W/kg

SAR(1 g) = 13.1 mW/g; SAR(10 g) = 6.18 mW/g


Maximum value of SAR (measured) = 16.5 mW/g

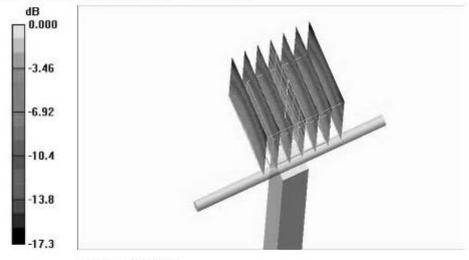

0 dB = 16.5 mW/g

Certificate No: D2450V2-786 JUL09 Page 8 of 9

### Impedance Measurement Plot for Body TSL

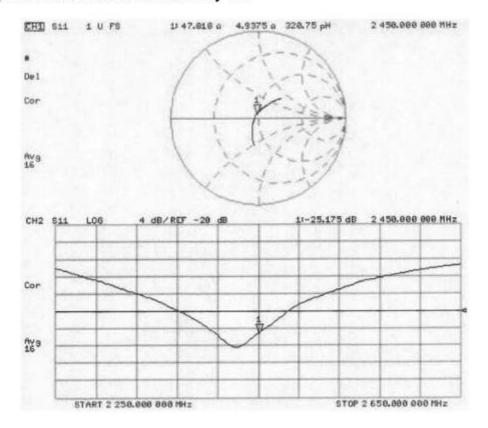

### **ANNEX F: DAE4 Calibration Certificate**

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA

Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client Auden		Certific	ate No: DAE4-452_Nov08
CALIBRATION C	ERTIFICATE		
Object	DAE4 - SD 000 D	04 BJ - SN: 452	
Calibration procedure(s)	QA CAL-06.v12 Calibration proces	dure for the data acquisition	electronics (DAE)
Calibration date:	November 18, 20	08	
Condition of the calibrated item	In Tolerance		
Calibration Equipment used (M&TE	critical for calibration)	r facility: environment temperature (22 Cal Date (Certificate No.)	Scheduled Calibration
Fluke Process Calibrator Type 702	178000 F 1787 F 1784 F 1	30-Sep-08 (No: 7673)	Sep-09
Keithley Multimeter Type 2001	SN: 0810278	30-Sep-08 (No: 7670)	Sep-09
Secondary Standards	ID#	Check Date (in house)	Scheduled Check
Calibrator Box V1.1	SE UMS 006 AB 1004	06-Jun-08 (in house check)	In house check: Jun-09
	Name	Function	Signature
Calibrated by:	Dominique Steffen	Technician	The second secon
Canada by.			
Approved by:	Fin Bornholt	R&D Director	William William
	Fin Bornholt	R&D Director	INBLUMUU Issued: November 18, 2008

Certificate No: DAE4-452\_Nov08

Page 1 of 5

Calibration Laboratory of Schmid & Partner

Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
S Swiss Calibration Service

Accreditation No.: SCS 108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA

Multilateral Agreement for the recognition of calibration certificates

Glossary

DAE

data acquisition electronics

Connector angle

information used in DASY system to align probe sensor X to the robot

coordinate system.

### Methods Applied and Interpretation of Parameters

- DC Voltage Measurement: Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- Connector angle: The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
  - DC Voltage Measurement Linearity: Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
  - Common mode sensitivity: Influence of a positive or negative common mode voltage on the differential measurement.
  - Channel separation: Influence of a voltage on the neighbor channels not subject to an input voltage.
  - AD Converter Values with inputs shorted: Values on the internal AD converter corresponding to zero input voltage
  - Input Offset Measurement: Output voltage and statistical results over a large number of zero voltage measurements.
  - Input Offset Current: Typical value for information; Maximum channel input offset current, not considering the input resistance.
  - Input resistance: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
  - Low Battery Alarm Voltage: Typical value for information. Below this voltage, a battery alarm signal is generated.
  - Power consumption: Typical value for information. Supply currents in various operating modes.

## TA Technology (Shanghai) Co., Ltd. **Test Report**

Report No. RZA2009-1293

Page 101of 107

# DC Voltage Measurement A/D - Converter Resolution nominal

full range = -100...+300 mV full range = -1......+3mV High Range: 1LSB =  $6.1 \mu V$ , 1LSB = Low Range: 61nV, DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	x	Y	z
High Range	404.585 ± 0.1% (k=2)	404.416 ± 0.1% (k=2)	404.565 ± 0.1% (k=2)
Low Range	3.97854 ± 0.7% (k=2)	3.95135 ± 0.7% (k=2)	3.98063 ± 0.7% (k=2)

### **Connector Angle**

Connector Angle to be used in DASY system	148°±1°
---	---------

Certificate No: DAE4-452\_Nov08

### **Appendix**

1. DC Voltage Linearity

High Range	Input (μV)	Reading (μV)	Error (%)
Channel X + Input	200000	200000	0.00
Channel X + Input	20000	20006.89	0.03
Channel X - Input	20000	-20003.71	0.02
Channel Y + Input	200000	200000.5	0.00
Channel Y + Input	20000	20008.05	0.04
Channel Y - Input	20000	-20006.61	0.03
Channel Z + Input	200000	199999.6	0.00
Channel Z + Input	20000	20006.84	0.03
Channel Z - Input	20000	-20004.66	0.02

Low Range	Input (μV)	Reading (µV)	Error (%)
Channel X + Input	2000	2000	0.00
Channel X + Input	200	200.19	0.09
Channel X - Input	200	-199.99	0.00
Channel Y + Input	2000	2000	0.00
Channel Y + Input	200	199.38	-0.31
Channel Y - Input	200	-200.73	0.36
Channel Z + Input	2000	2000.1	0.00
Channel Z + Input	200	199.25	-0.38
Channel Z - Input	200	-201.52	0.76

### 2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec: Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (μV)	Low Range Average Reading (μV)
Channel X	200	2.99	1.90
	- 200	-1.54	-1.85
Channel Y	200	-8.82	-8.73
	- 200	6.90	6.96
Channel Z	Channel Z 200	9.94	10.21
	- 200	-13.53	-13.21

### 3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (μV)	Channel Y (µV)	Channel Z (μV)
Channel X	200	-	1.31	-0.98
Channel Y	200	1.52	7.7	2.97
Channel Z	200	-1.16	0.18	-

### 4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	16123	16646
Channel Y	15886	16452
Channel Z	16175	16346

### 5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10MΩ

	Average (μV)	min. Offset (μV)	max. Offset (μV)	Std. Deviation (µV)
Channel X	0.53	-0.80	1.64	0.33
Channel Y	-1.51	-2.67	-0.89	0.35
Channel Z	-1.99	-3.07	-1.43	0.29

### 6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

7. Input Resistance

	Zeroing (MOhm)	Measuring (MOhm)
Channel X	0.1999	198.3
Channel Y	0.1999	200.1
Channel Z	0.1999	199.3

8. Low Battery Alarm Voltage (verified during pre test)

Typical values	Alarm Level (VDC)	
Supply (+ Vcc)	+7.9	
Supply (- Vcc)	-7.6	

9. Power Consumption (verified during pre test)


Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.0	+6	+14
Supply (- Vcc)	-0.01	-8	-9


# **ANNEX G: The EUT Appearances and Test Configuration**




Picture 4: Constituents of the EUT


Report No. RZA2009-1293



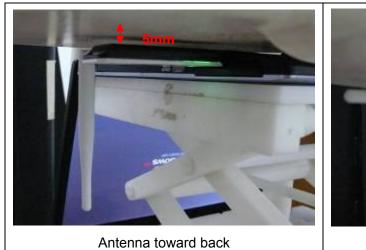


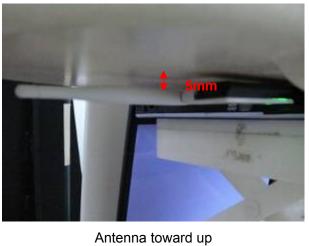

Picture 5:Test position 1

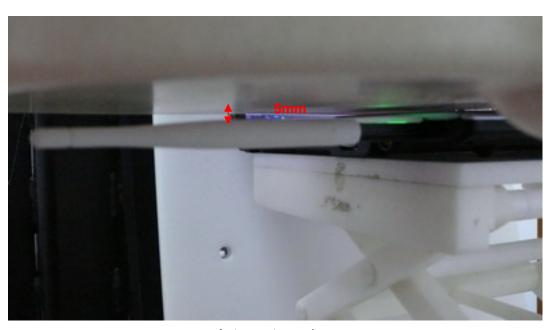


Antenna toward up Picture 6:Test position 2

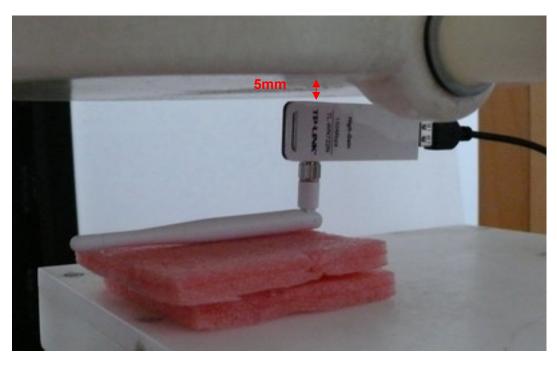

Antenna toward up Picture 7:Test position 3



Antenna toward up Picture 8: Test position 4

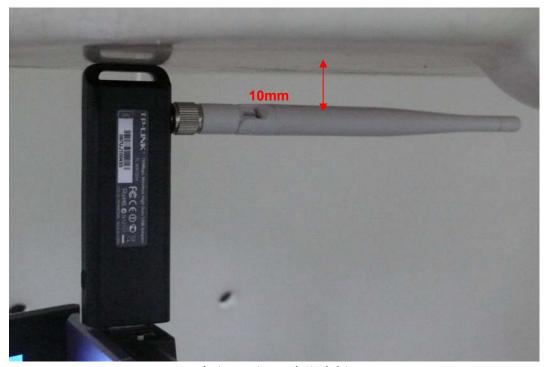

Antenna toward straight Picture 9: Test position 5