

APPLICATION FOR CERTIFICATION  
On Behalf of

TP-LINK Technologies Co., Ltd.

150Mbps Wireless High Gain USB Adapter

Model Number: TL-WN722N

FCC ID: TE7WN722N

Prepared for : TP-LINK Technologies Co., Ltd.  
Building 7, Second Part, Honghualing Industrial Zone,  
Xili town, Nanshan, Shenzhen, P.R. China

Prepared By : Audix Technology (Shenzhen) Co., Ltd.  
No. 6, Ke Feng Rd., 52 Block,  
Shenzhen Science & Industrial Park,  
Nantou, Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F09214  
Date of Test : Oct.10~13, 2009  
Date of Report : Oct.15, 2009

## TABLE OF CONTENTS

Description	Page
<b>1. SUMMARY OF STANDARDS AND RESULTS.....</b>	<b>1-1</b>
1.1. Description of Standards and Results .....	1-1
<b>2. GENERAL INFORMATION .....</b>	<b>2-1</b>
2.1. Description of Device (EUT) .....	2-1
2.2. Test information .....	2-2
2.3. Data rate VS power .....	2-3
2.4. Tested Supporting System Details .....	2-4
2.5. Test Facility .....	2-5
2.6. Measurement Uncertainty (95% confidence levels, k=2) .....	2-5
<b>3. POWER LINE CONDUCTED EMISSION TEST .....</b>	<b>3-1</b>
3.1. Test Equipments.....	3-1
3.2. Block Diagram of Test Setup.....	3-1
3.3. Power Line Conducted Emission Test Limits.....	3-1
3.4. Configuration of EUT on Test .....	3-2
3.5. Operating Condition of EUT.....	3-2
3.6. Test Procedure.....	3-2
3.7. Power Line Conducted Emission Test Results .....	3-2
<b>4. RADIATED EMISSION TEST .....</b>	<b>4-1</b>
4.1. Test Equipment .....	4-1
4.2. Block Diagram of Test Setup.....	4-1
4.3. Radiated Emission Limit.....	4-2
4.4. EUT Configuration on Test.....	4-3
4.5. Operating Condition of EUT.....	4-3
4.6. Test Procedure.....	4-3
4.7. Radiated Emission Test Results .....	4-4
<b>5. CONDUCTED SPURIOUS EMISSIONS.....</b>	<b>5-1</b>
5.1. Test Equipment .....	5-1
5.2. Limit.....	5-1
5.3. Test Procedure.....	5-1
5.4. Test result.....	5-1
<b>6. BAND EDGE COMPLIANCE TEST .....</b>	<b>6-1</b>
6.1. Test Equipment .....	6-1
6.2. Limit.....	6-1
6.3. Test Produce .....	6-1
6.4. Test Results .....	6-1
<b>7. 6dB Bandwidth Test.....</b>	<b>7-1</b>
7.1. Test Equipment .....	7-1
7.2. Limit.....	7-1
7.3. Test Procedure.....	7-1
7.4. Test Results .....	7-1
<b>8. OUTPUT POWER TEST .....</b>	<b>8-1</b>
8.1. Test Equipment .....	8-1
8.2. Limit(FCC Part 15C 15.247 b(3)).....	8-1
8.3. Test Procedure.....	8-1
8.4. Test Results .....	8-2
<b>9. POWER SPECTRAL DENSITY TEST .....</b>	<b>9-1</b>

9.1.	Test Equipment .....	9-1
9.2.	Limit.....	9-1
9.3.	Test Procedure.....	9-1
9.4.	Test Results .....	9-2
<b>10.</b>	<b>ANTENNA REQUIREMENT .....</b>	<b>10-1</b>
<b>11.</b>	<b>DEVIATION TO TEST SPECIFICATIONS.....</b>	<b>11-1</b>
<b>12.</b>	<b>PHOTOGRAPH OF TEST .....</b>	<b>12-1</b>
12.1.	Photos of Power Line Conducted Emission Test .....	12-1
12.2.	Photos of Radiated Emission Test.....	12-2
<b>13.</b>	<b>PHOTOGRAPH OF EUT .....</b>	<b>13-1</b>

## TEST REPORT CERTIFICATION

Applicant : TP-LINK Technologies Co., Ltd.  
Manufacturer : TP-LINK Technologies Co., Ltd.  
EUT Description : 150Mbps Wireless High Gain USB Adapter  
FCC ID : TE7WN722N

(A) MODEL NO. : TL-WN722N

(B) SERIAL NO. : N/A

(C) POWER SUPPLY : DC 5V From PC

(D) TEST VOLTAGE : DC 5V From PC Input AC 120V/60Hz

Test Procedure Used:

FCC Rules and Regulations Part 15 Subpart C 2008

The device described above is tested by AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both radiated and conducted emissions.

The test results are contained in this test report and AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. is assumed full responsibility for the accuracy and completeness of these tests. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Date of Test :

Oct.10~13, 2009

Prepared by :

Edie Huang / Assistant

Reviewer :

Jamy Yu / Senior Engineer

Approved & Authorized Signer :



Ken Lu / Manager

# 1. SUMMARY OF STANDARDS AND RESULTS

## 1.1.Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Power Line Conducted Emission Test	FCC Part 15: 15.207 ANSI C63.4: 2003 KDB558074	PASS
Radiated Emission Test	FCC Part 15: 15.209 ANSI C63.4: 2003 KDB558074	PASS
Band Edge Compliance Test	FCC Part 15: 15.247 KDB558074	PASS
Conducted spurious emissions test	FCC Part 15: 15.247 KDB558074	PASS
6dB Bandwidth Test	FCC Part 15: 15.247 KDB558074	PASS
Output Power Test	FCC Part 15: 15.247 KDB558074	PASS
Power Spectral Density Test	FCC Part 15: 15.247 KDB558074	PASS
Antenna requirement	FCC Part 15: 15.203	PASS
N/A is an abbreviation for Not Applicable.		

## 2. GENERAL INFORMATION

### 2.1. Description of Device (EUT)

Product Name	: 150Mbps Wireless High Gain USB Adapter
Model Number	: TL-WN722N
FCC ID	: TE7WN722N
Operation Frequency	: IEEE 802.11b/g, 802.11n HT20: 2412MHz---2462MHz IEEE802.11n HT40: 2422MHz---2452MHz
Channel Number	: IEEE 802.11b/g, 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7 Channels
Modulation Technology	: IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20, HT40: OFDM (64QAM, 16QAM, QPSK,BPSK)
Output Power	: IEEE 802.11b: 18.02dBm IEEE 802.11g: 22.34dBm IEEE 802.11n HT20: 21.98dBm IEEE 802.11n HT40: 20.80dBm
Antenna and Gain	: One PCB antenna (Only used for Receive), One Dipole Antenna (Used for Receive and Transmit), 2.12dBi gain for Dipole antenna.
Applicant	: TP-LINK Technologies Co., Ltd. Building 7, Second Part, Honghualing Industrial Zone, Xili town, Nanshan, Shenzhen, P.R. China
Manufacturer	: TP-LINK Technologies Co., Ltd. Building 7, Second Part, Honghualing Industrial Zone, Xili town, Nanshan, Shenzhen, P.R. China
Date of Test	: Oct.10~13, 2009
Date of Receipt	: Oct.09, 2009
Sample Type	: Prototype production

## 2.2.Test information

The test software “art.exe” was used to control EUT work in Continuous TX mode, and select test channel, wireless mode and data rate.

Tested mode, channel, and data rate information			
Mode	data rate (Mbps)(see Note)	Channel	Frequency (MHz)
IEEE 802.11b	1	Low :CH1	2412
	1	Middle: CH6	2437
	1	High: CH11	2462
IEEE 802.11g	6	Low :CH1	2412
	6	Middle: CH6	2437
	6	High: CH11	2462
IEEE 802.11n HT20	6.5	Low :CH1	2412
	6.5	Middle: CH6	2437
	6.5	High: CH11	2462
IEEE 802.11n HT40	13.5	Low :CH1	2422
	13.5	Middle: CH4	2437
	13.5	High: CH7	2452
Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.			

## 2.3.Date rate VS power

Mode	Data rate(Mbps)	CH	Level (dBm)	Limit (dBm)
11b	1	CH6	17.80	<b>30</b>
	2	CH6	17.45	<b>30</b>
	5.5	CH6	17.57	<b>30</b>
	11	CH6	17.46	<b>30</b>
11g	6	CH6	22.34	<b>30</b>
	9	CH6	22.11	<b>30</b>
	12	CH6	22.10	<b>30</b>
	18	CH6	22.06	<b>30</b>
	24	CH6	22.12	<b>30</b>
	36	CH6	22.21	<b>30</b>
	48	CH6	22.03	<b>30</b>
	54	CH6	22.01	<b>30</b>
11n HT20	6.5	CH6	21.98	<b>30</b>
	13	CH6	21.67	<b>30</b>
	19.5	CH6	21.21	<b>30</b>
	26	CH6	21.32	<b>30</b>
	39	CH6	21.45	<b>30</b>
	52	CH6	21.33	<b>30</b>
	58.5	CH6	21.43	<b>30</b>
	65	CH6	21.76	<b>30</b>
11n HT40	13.5	CH4	20.80	<b>30</b>
	27	CH4	20.56	<b>30</b>
	40.5	CH4	20.21	<b>30</b>
	54	CH4	20.32	<b>30</b>
	81	CH4	20.44	<b>30</b>
	108	CH4	20.32	<b>30</b>
	121.5	CH4	20.65	<b>30</b>
	135	CH4	20.37	<b>30</b>
When IEEE 802.11b's data rate was 1Mbps ; IEEE 802.11g's data rate was 6Mbps, IEEE 802.11n HT20's data rate was 6.5 Mbps; IEEE802.11n HT40's data rate was 13.5Mbps the EUT have maximum output power and all the test was performed in this data rate set.				



## 2.4. Tested Supporting System Details

### 2.4.1. NOTEBOOK

M/N	:	PP09S
S/N	:	N/A
Manufacturer	:	DELL
Power Adaptor	:	Manufacturer: DELL, M/N: LA65NS1-00 Cable: Unshielded, Detachable, 4.0m (Bond one ferrite core)

## 2.5. Test Facility

### Site Description

Name of Firm : Audix Technology (Shenzhen) Co., Ltd.  
No. 6, Ke Feng Rd., 52 Block, Shenzhen  
Science & Industrial Park, Nantou,  
Shenzhen, Guangdong, China

3m Anechoic Chamber : Mar.31, 2009 File on Federal  
Communication Commission  
Registration Number: 90454

3m & 10m Anechoic Chamber : Jan. 31, 2007 File on Federal  
Communication Commission  
Registration Number: 794232

EMC Lab. : Accredited by DATech, German  
Registration Number: DAT-P-091/99-01  
Feb. 02, 2009

Accredited by NVLAP, USA  
NVLAP Code: 200372-0  
Apr. 01, 2009

## 2.6. Measurement Uncertainty (95% confidence levels, k=2)

Test Item	Uncertainty
Uncertainty for Conduction emission test in No. 1 Conduction	2.40dB
Uncertainty for Radiation Emission test in 3m chamber	3.78 dB (Polarize: V)
	4.20 dB (Polarize: H)
Uncertainty for Radiated Spurious Emission test in RF chamber	2.70 dB (Bilog antenna 30M~1000MHz)
	2.26 dB (Horn antenna 1000M~25000MHz)
Uncertainty for Conduction Spurious emission test	2.10 dB
Uncertainty for Output power test	0.94 dB
Uncertainty for Power density test	2.10 dB
Uncertainty for Temperature and humidity test	2%
	1℃
Uncertainty for Bandwidth test	$1 \times 10^{-9}$
Uncertainty for DC power test	0.042 %
Uncertainty for test site temperature and humidity	0.6℃
	3%


### 3. POWER LINE CONDUCTED EMISSION TEST

#### 3.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Test Receiver	Rohde & Schwarz	ESHS20	836600/006	May.08, 09	1 Year
2	L.I.S.N.#2	Kyoritsu	KNW-407	8-1636-1	May.08, 09	1 Year
3	Terminator	Hubersuhner	50Ω	No. 1	May.08, 09	1 Year
4	RF Cable	Fujikura	3D-2W	LISN Cable 1#	May.08, 09	1 Year
5	Coaxial Switch	Anritsu	MP59B	M55367	May.08, 09	1 Year
6	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100341	May.08, 09	1 Year

#### 3.2. Block Diagram of Test Setup

Block diagram of connection between the EUT and simulators

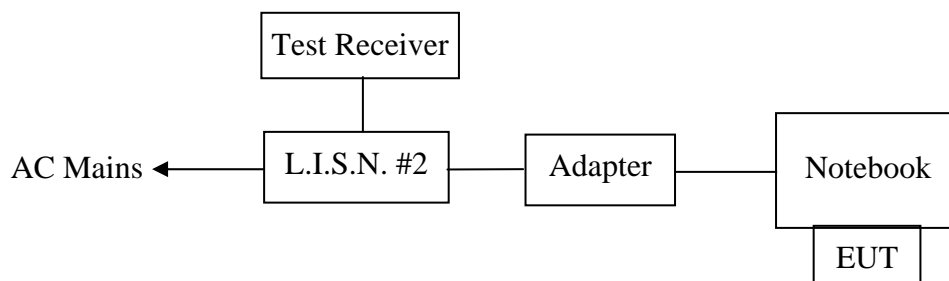

*(EUT: 150Mbps Wireless High Gain USB Adapter)*

#### 3.3. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. \* Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

### 3.4.Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

#### 3.4.1. 150Mbps Wireless High Gain USB Adapter (EUT)

Model Number : TL-WN722N  
Serial Number : N/A.

### 3.5.Operating Condition of EUT

3.5.1. Setup the EUT and simulator as shown as Section 3.2.

3.5.2. Turned on the power of all equipment.

3.5.3. PC run test software to control the EUT worked in test mode (Tx Mode) and measured it.

### 3.6.Test Procedure

The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power Via Notebook connected to the power mains through a line impedance stabilization network (L.I.S.N. 2#). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2003 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESHS20) is set at 10kHz.

The frequency range from 150kHz to 30MHz is checked.

The test result are reported on Section 3.7.,

### 3.7.Power Line Conducted Emission Test Results

**PASS.** (All emissions not reported below are too low against the prescribed limits.)




NO.6 Ke Feng Road,Block 52,  
Shenzhen Science&Industry Park  
Nantou, Shenzhen,Guang dong, China.  
Tel:+86-755-26639495  
Fax:+86-755-26632877  
Postcode:518057

Data: 1

File: D:\DATA\2009 Report\T\TP-LINK\TL-WN722N.EM6 (4)

Date: 2009-10-11

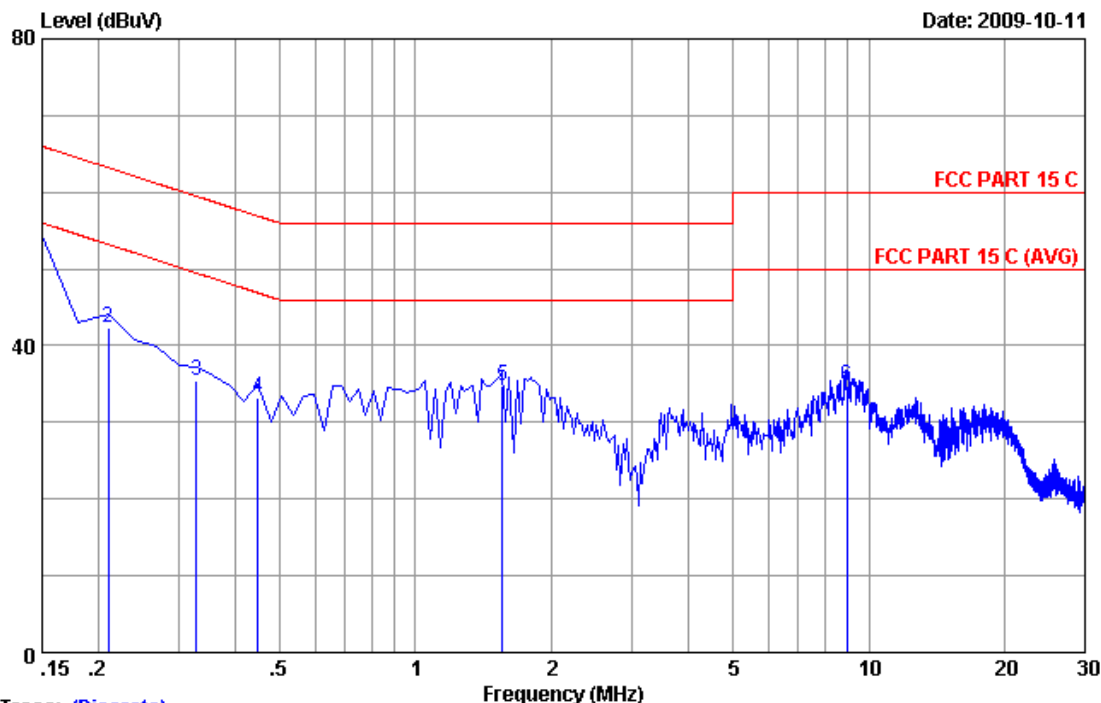

Trace: (Discrete)

Site no : Audix No.1 Conduction Data no : 1  
Dis./Ant. : \*\* 2009 KNW407 VA  
Limit : FCC PART 15 C  
Env./Ins. : Temp:23'C Humi:54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power Rating : DC 5V From PC Input AC 120V/60Hz  
Test Mode : Tx Mode  
M/N : TL-WN722N

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.15000	0.47	9.88	42.27	52.62	66.00	13.38	QP
2	0.20970	0.42	9.88	32.13	42.43	63.22	20.79	QP
3	0.32910	0.37	9.89	25.10	35.36	59.47	24.11	QP
4	0.44850	0.34	9.89	22.86	33.09	56.90	23.81	QP
5	1.553	0.35	9.89	24.43	34.67	56.00	21.33	QP
6	8.956	0.42	9.94	24.48	34.84	60.00	25.16	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss(Include 10dB pulse limit)+Reading  
2.If the average limit is met when using a quasi-peak detector.  
the EUT shall be deemed to meet both limits and measurement  
with average detector is unnecessary.




NO.6 Ke Feng Road,Block 52,  
Shenzhen Science&Industry Park  
Nantou, Shenzhen,Guang dong, China.  
Tel:+86-755-26639495  
Fax:+86-755-26632877  
Postcode:518057

Data: 2

File: D:\DATA\2009 Report\T\TP-LINK\TL-WN722N.EM6 (4)

Date: 2009-10-11

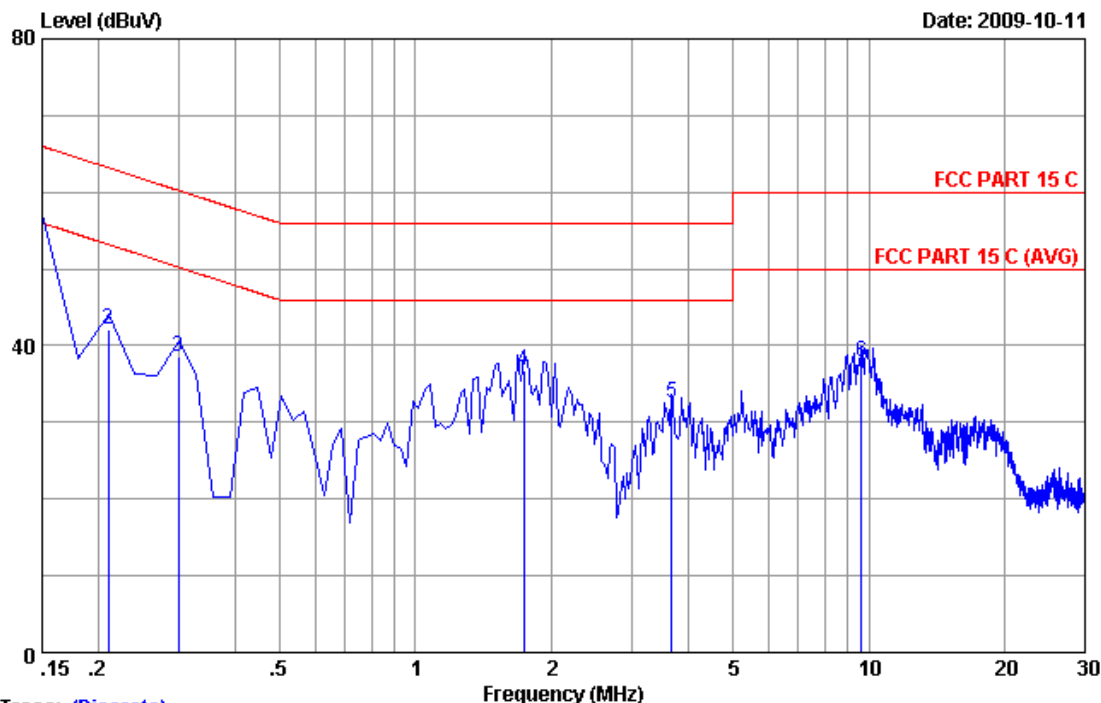

Trace: (Discrete)

Site no : Audix No.1 Conduction Data no : 2  
Dis./Ant. : \*\* 2009 KNW407 VB  
Limit : FCC PART 15 C  
Env./Ins. : Temp:23'C Humi:54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power Rating : DC 5V From PC Input AC 120V/60Hz  
Test Mode : Tx Mode  
M/N : TL-WN722N

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.15000	0.49	9.88	44.90	55.27	66.00	10.73	
2	0.20970	0.44	9.88	31.70	42.02	63.22	21.20	
3	0.29925	0.41	9.88	28.30	38.59	60.26	21.67	
4	1.732	0.36	9.89	26.48	36.73	56.00	19.27	
5	3.672	0.37	9.91	22.33	32.61	56.00	23.39	
6	9.642	0.44	9.94	27.53	37.91	60.00	22.09	

Remarks: 1.Emission Level=LISN Factor+Cable Loss(Include 10dB pulse limit)+Reading  
2.If the average limit is met when using a quasi-peak detector,  
the EUT shall be deemed to meet both limits and measurement  
with average detector is unnecessary.

## 4. RADIATED EMISSION TEST

### 4.1. Test Equipment

Frequency rang: 30~1000MHz


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	3#Chamber	AUDIX	N/A	N/A	Dec.05,08	1 Year
2	EMI Spectrum	Agilent	E4407B	MY41440292	May.08, 09	1 Year
3	Test Receiver	Rohde & Schwarz	ESVS10	834468/011	May.08, 09	1 Year
4	Amplifier	HP	8447D	2648A04738	May.08, 09	1 Year
5	Bilog Antenna	Schaffner	CBL6111C	2598	Nov.10, 08	1 Year
6	RF Cable	MIYAZAKI	8D-FB	3# Chamber No.1	May.08, 09	1 Year
7	Coaxial Switch	Anritsu	MP59B	M73989	May.08, 09	1 Year

Frequency rang: above 1000MHz

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum Analyzer	Agilent	E4446A	US44300459	May.08, 09	1 Year
2	Horn Antenna	EMCO	3115	9607-4877	May.27, 08	1.5 Year
3	Horn Antenna	EMCO	3116	00060088	May.27, 08	1.5Year
4	Amplifier	Agilent	8449B	3008A02495	Nov.24,08	1 Year
5	RF Cable	Hubersuhner	SUCOFLEX102	28620/2	May.08, 09	1 Year
6	RF Cable	Hubersuhner	SUCOFLEX102	271471/4	May.08, 09	1 Year
7	RF Cable	Hubersuhner	SUCOFLEX102	29086/2	May.08, 09	1 Year

### 4.2. Block Diagram of Test Setup


Block diagram of connection between the EUT and simulators

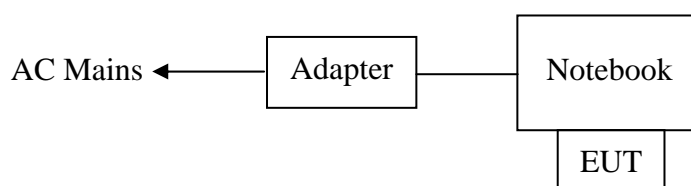

*(EUT: 150Mbps Wireless High Gain USB Adapter )*

## 4.2.1. In Anechoic Chamber

## ANTENNA TOWER

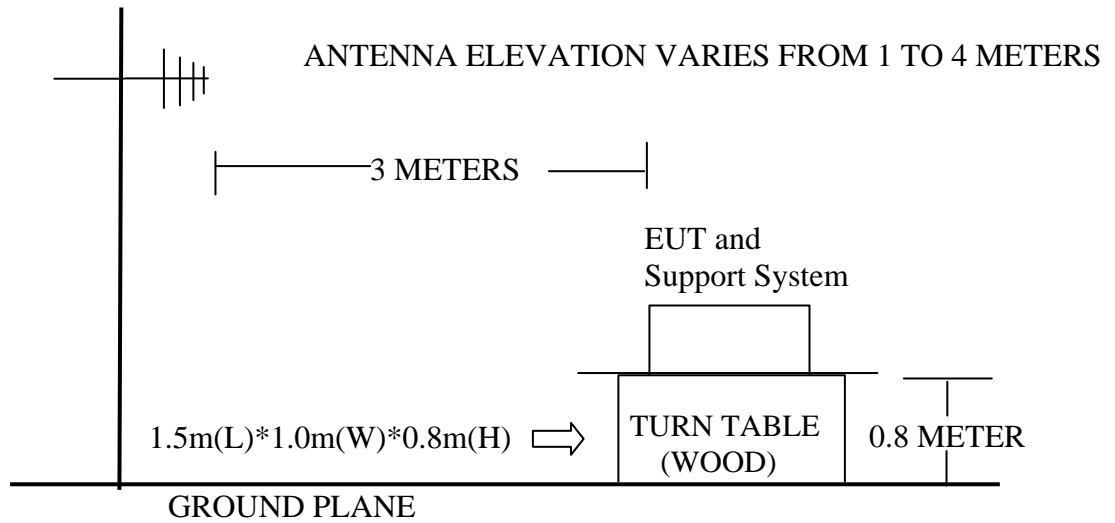

## 4.3. Radiated Emission Limit

## 4.3.1. 15.209 limits

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

- Remark :
- (1) Emission level  $\text{dB}\mu\text{V} = 20 \log$  Emission level  $\mu\text{V}/\text{m}$
  - (2) The smaller limit shall apply at the cross point between two frequency bands.
  - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.



## 4.3.2. 15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

## 4.4.EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

## 4.4.1. 150Mbps Wireless High Gain USB Adapter (EUT)

Model Number : TL-WN722N  
Serial Number : N/A

## 4.5.Operating Condition of EUT

4.5.1. Setup the EUT and simulator as shown as Section 4.2.

4.5.2. Turned on the power of all equipment.

4.5.3. Notebook run test software to control the EUT worked in test mode (Tx Mode) and measured it.

## 4.6.Test Procedure

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna are set on test.

The bandwidth of the EMI test receiver (R&S ESVS10) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 1MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz

The frequency range from 30MHz to 10<sup>th</sup> harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.

#### 4.7.Radiated Emission Test Results

**PASS.**

All the emissions from 30MHz to 25 GHz were comply with 15.209 limits.

Frequency: 30MHz~1GHz




No.6,Ke Feng Road,Block 52,  
Shenzhen Science&Industry Park  
Nantou Shenzhen,Guangdong,China  
Tel:+86-755-26639495  
Fax:+86-755-26632877  
Postcode:518057

Data: 2

File: D:\2009 Report Data\T\TP-LINK\TL-WN722N.EM6 (2)

Date: 2009-10-13

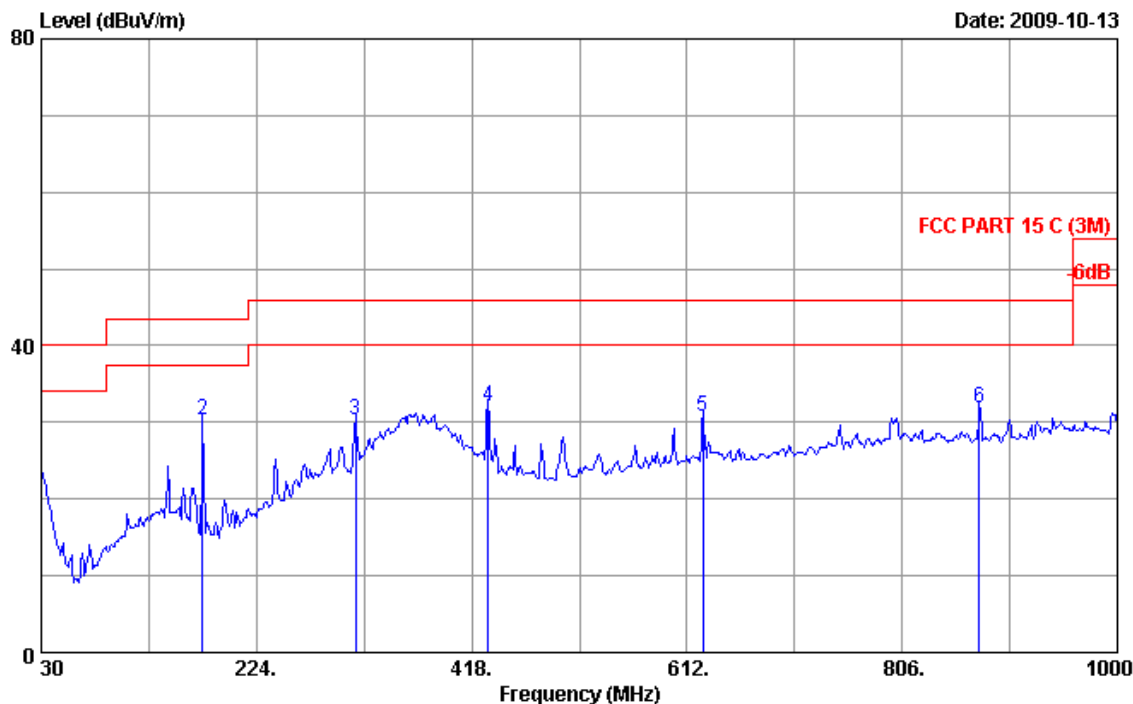

Site no. : 3m Chamber Data no. : 2  
Dis. / Ant. : 3m CBL6111C Ant. pol. : HORIZONTAL  
Limit : FCC PART 15 C (3M)  
Env. / Ins. : 24°C/56% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power Rating : DC 5V From PC input AC 120V/60Hz  
Test Mode : Tx Mode  
M/N:TL-WN722N

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.000	19.86	0.52	2.17	22.55	40.00	17.45	QP
2	175.500	9.64	1.20	19.39	30.23	43.50	13.27	QP
3	313.240	13.80	1.76	14.66	30.22	46.00	15.78	QP
4	432.550	16.90	2.03	13.10	32.03	46.00	13.97	QP
5	626.550	19.92	2.57	8.15	30.64	46.00	15.36	QP
6	875.840	22.55	3.15	6.09	31.79	46.00	14.21	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
2. The emission levels that are 20dB below the official limit are not reported.




No.6, Ke Feng Road, Block 52,  
Shenzhen Science&Industry Park  
Nantou Shenzhen, Guangdong, China  
Tel:+86-755-26639495  
Fax:+86-755-26632877  
Postcode:518057

Data: 1

File: D:\2009 Report Data\T\TP-LINK\TL-WN722N.EM6 (2)

Date: 2009-10-13

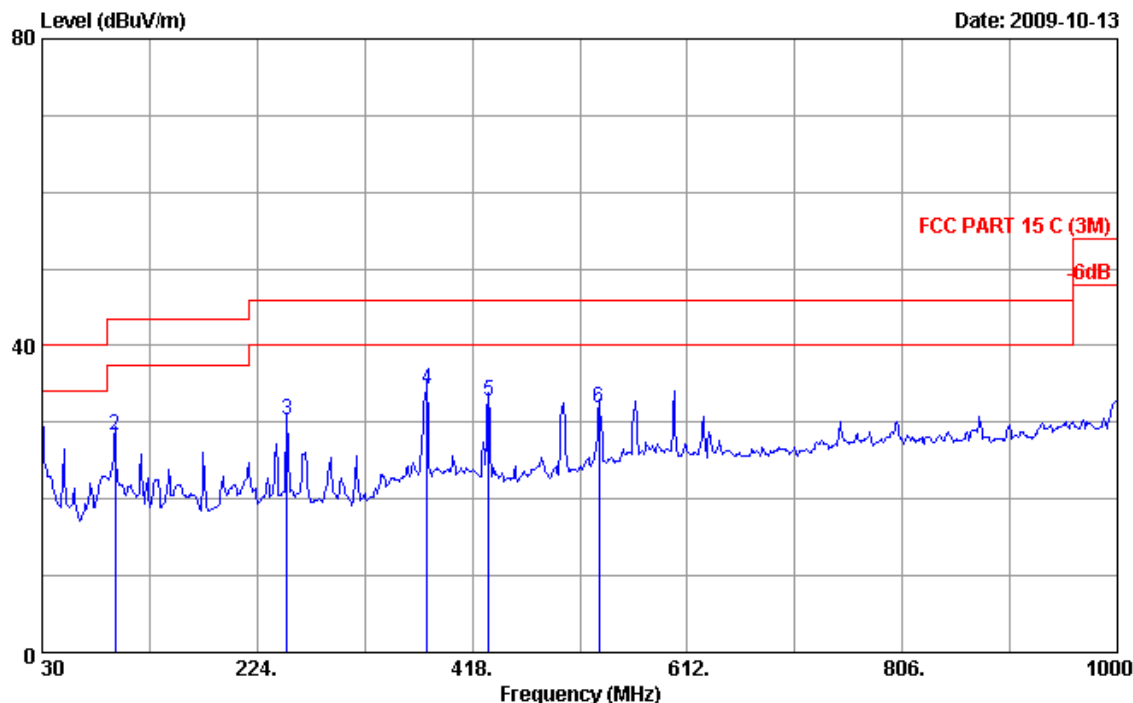

Site no. : 3m Chamber Data no. : 1  
Dis. / Ant. : 3m CBL6111C Ant. pol. : VERTICAL  
Limit : FCC PART 15 C (3M)  
Env. / Ins. : 24°C/56% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power Rating : DC 5V From PC input AC 120V/60Hz  
Test Mode : Tx Mode  
M/N:TL-WN722N

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
				Reading (dBuV)	Level (dBuV/m)			
1	30.000	19.86	0.52	36.63	30.08	40.00	9.92	QP
2	95.960	9.74	0.88	44.44	28.35	43.50	15.15	QP
3	251.160	12.75	1.64	42.76	30.22	46.00	15.78	QP
4	377.260	15.57	1.88	43.99	34.41	46.00	11.59	QP
5	432.550	16.90	2.03	40.90	32.79	46.00	13.21	QP
6	532.460	18.25	2.33	38.46	31.96	46.00	14.04	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
2. The emission levels that are 20dB below the official limit are not reported.

Frequency: 1GHz~18GHz




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 33

File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

Date: 2009-10-11

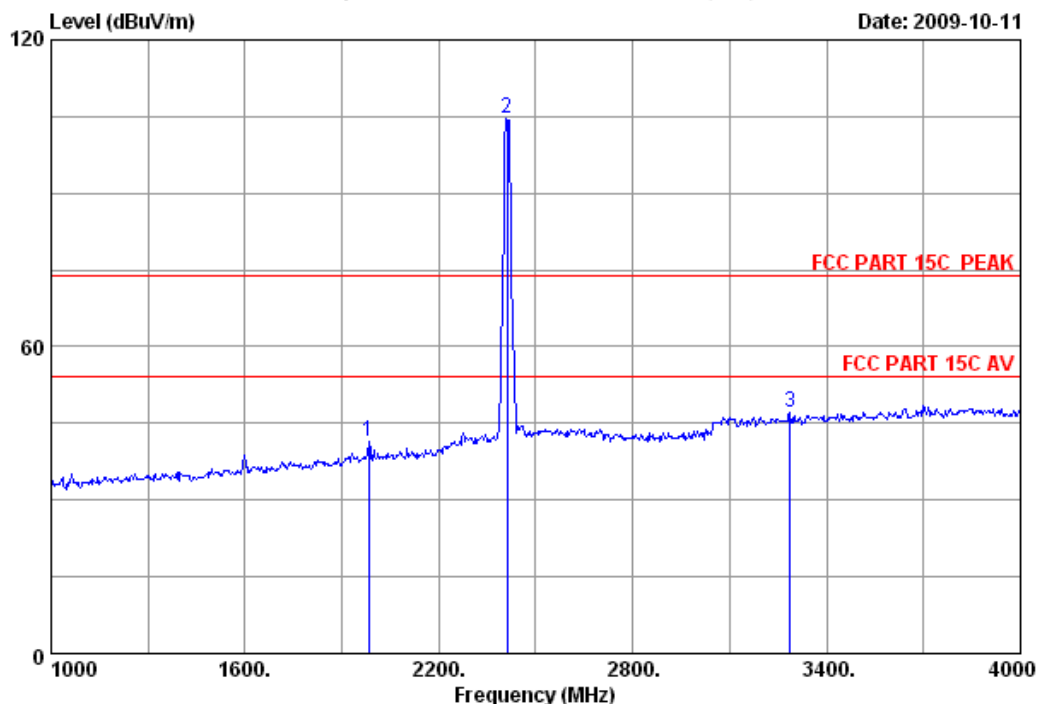

Site no. : 3m Chamber Data no. : 33  
 Dis. / Ant. : 3m 3115(0905) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 150Mbps Wireless High Gain USB Adapter  
 Power : DC 5V From PC Input AC 120V/60Hz  
 Test mode : IEEE802.11b CH1 2412MHz  
 M/N : TL-WN722N

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dbuv)	(dBUV/m)	(dBUV/m)	(dB)	
1	1984.000	27.83	7.76	36.06	41.79	41.32	74.00	32.68	Peak
2	2412.000	28.48	8.60	35.95	103.47	104.60	74.00	-30.60	Peak
3	3286.000	30.97	10.26	35.79	41.79	47.23	74.00	26.77	Peak


## Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 34 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

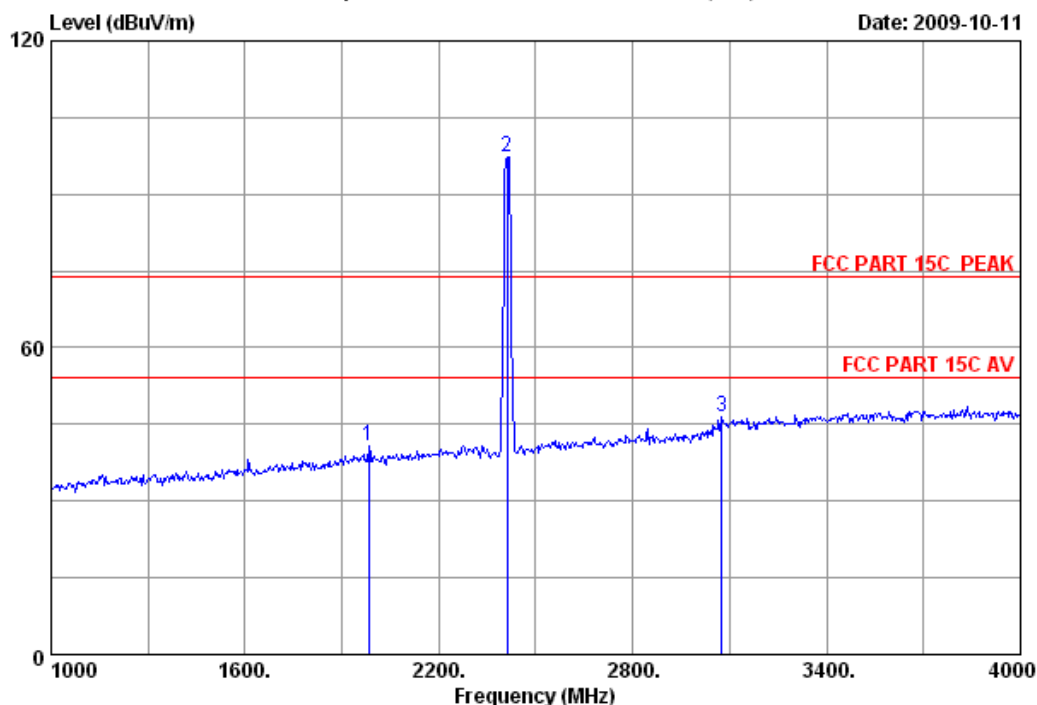

Site no. : 3m Chamber Data no. : 34  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11b CH1 2412MHz  
M/N : TL-WN722N

	Freq.	Ant.	Cable	Amp.		Emission			
	(MHz)	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dbuv)	(dBuV/m)	(dBuV/m)	(dB)	
1	1984.000	27.83	7.76	36.06	41.18	40.71	74.00	33.29	Peak
2	2412.000	28.48	8.60	35.95	96.12	97.25	74.00	-23.25	Peak
3	3076.000	30.39	9.96	35.90	41.99	46.44	74.00	27.56	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 35

File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

Date: 2009-10-11

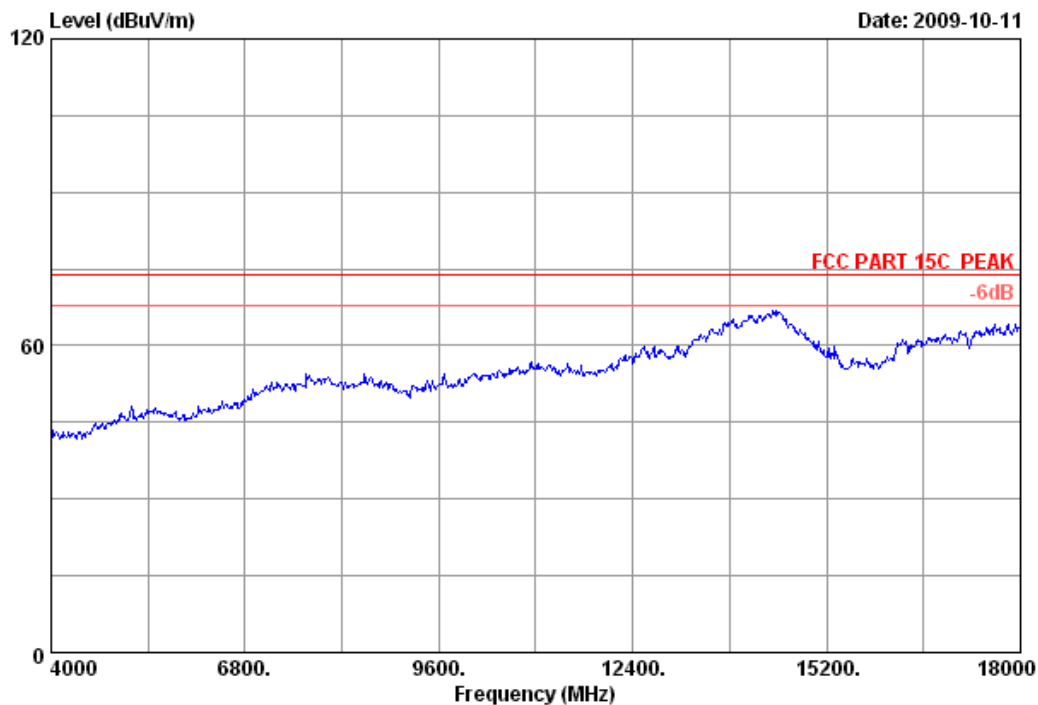


Site no.	: 3m Chamber	Data no.	: 35
Dis. / Ant.	: 3m 3115(0905)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless High Gain USB Adapter		
Power	: DC 5V From PC Input AC 120V/60Hz		
Test mode	: IEEE802.11b CH1 2412MHz		
M/N	: TL-WN722N		



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 36 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

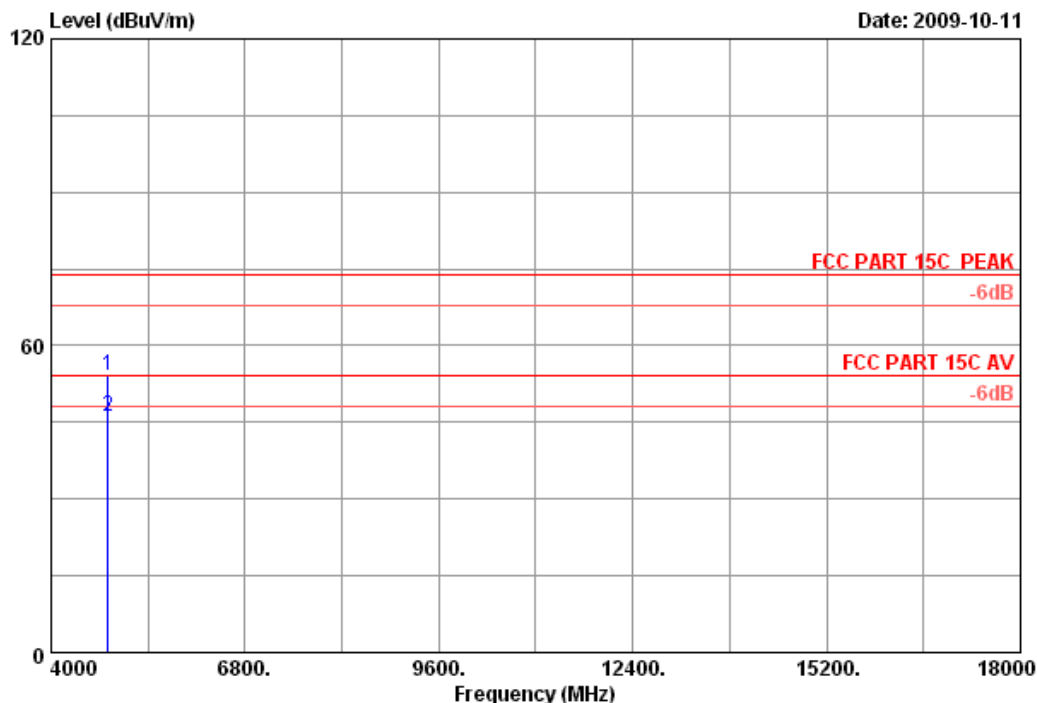

Site no. : 3m Chamber Data no. : 36  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11b CH1 2412MHz  
M/N : TL-WN722N

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dbuv)	(dBuV/m)	(dBuV/m)	(dB)	
1	4824.000	34.47	12.58	35.25	42.47	54.27	74.00	19.73	Peak
2	4824.000	34.47	12.58	35.25	34.27	46.07	54.00	7.93	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.






No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 37

File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

Date: 2009-10-11

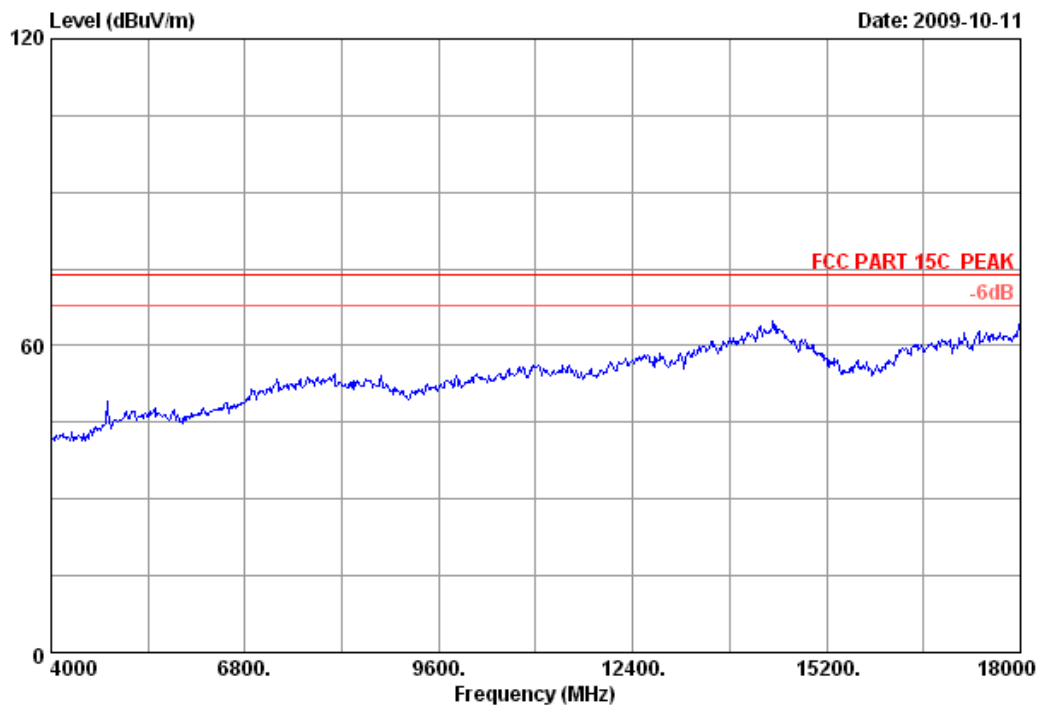


Site no.	: 3m Chamber	Data no.	: 37
Dis. / Ant.	: 3m 3115(0905)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless High Gain USB Adapter		
Power	: DC 5V From PC Input AC 120V/60Hz		
Test mode	: IEEE802.11b CH1 2412MHz		
M/N	: TL-WN722N		



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 38 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

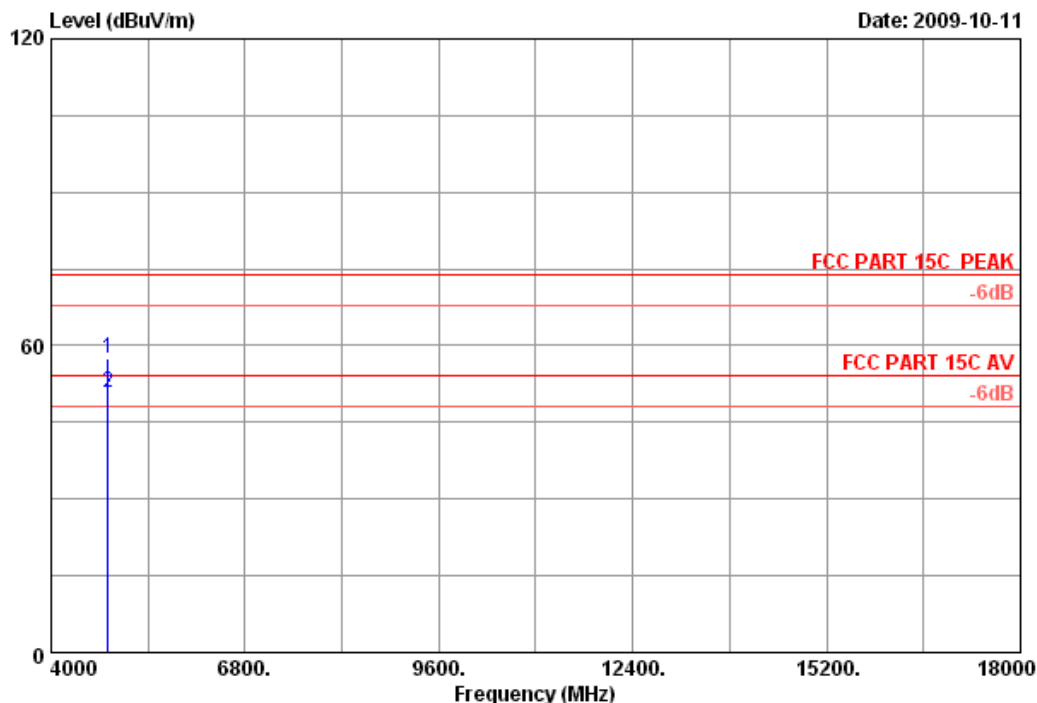

Site no. : 3m Chamber Data no. : 38  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11b CH1 2412MHz  
M/N : TL-WN722N

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dbuv)	(dBuV/m)	(dBuV/m)	(dB)	
1	4824.000	34.47	12.58	35.25	45.63	57.43	74.00	16.57	Peak
2	4824.000	34.47	12.58	35.25	38.99	50.79	54.00	3.21	Average


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 39 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

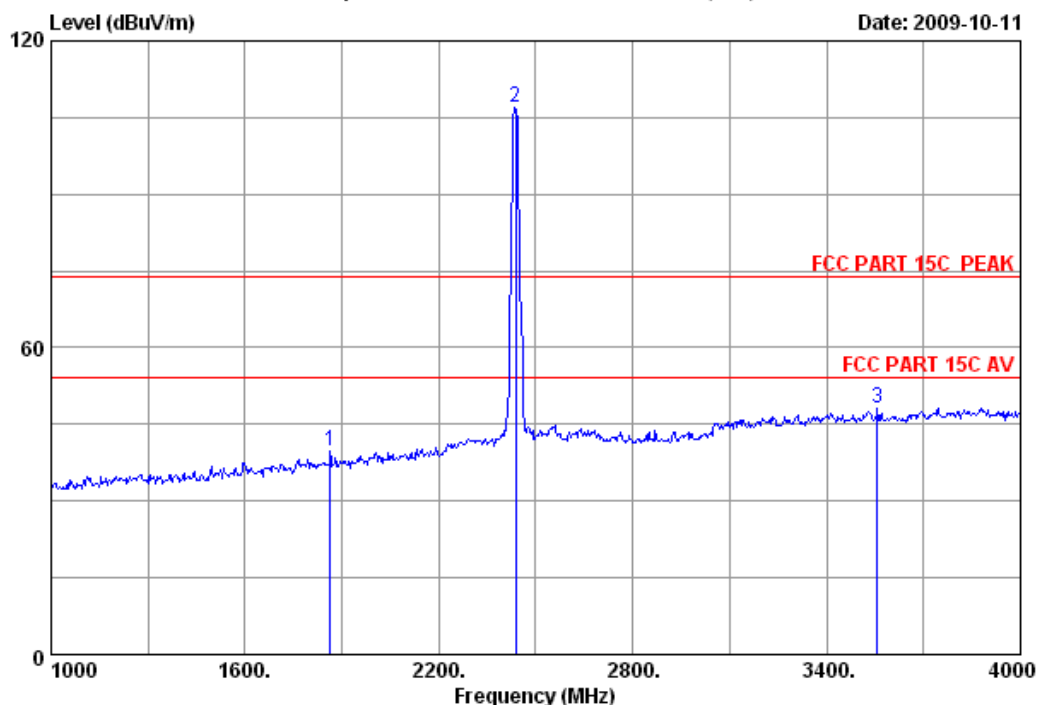

Site no. : 3m Chamber Data no. : 39  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11b CH6 2437MHz  
M/N : TL-WN722N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dbuv)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1864.000	27.37	7.57	36.22	41.16	39.88	74.00	34.12	Peak
2	2437.000	28.53	8.60	36.06	105.94	107.01	74.00	-33.01	Peak
3	3556.000	31.67	10.62	35.58	41.51	48.22	74.00	25.78	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 40

File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

Date: 2009-10-11

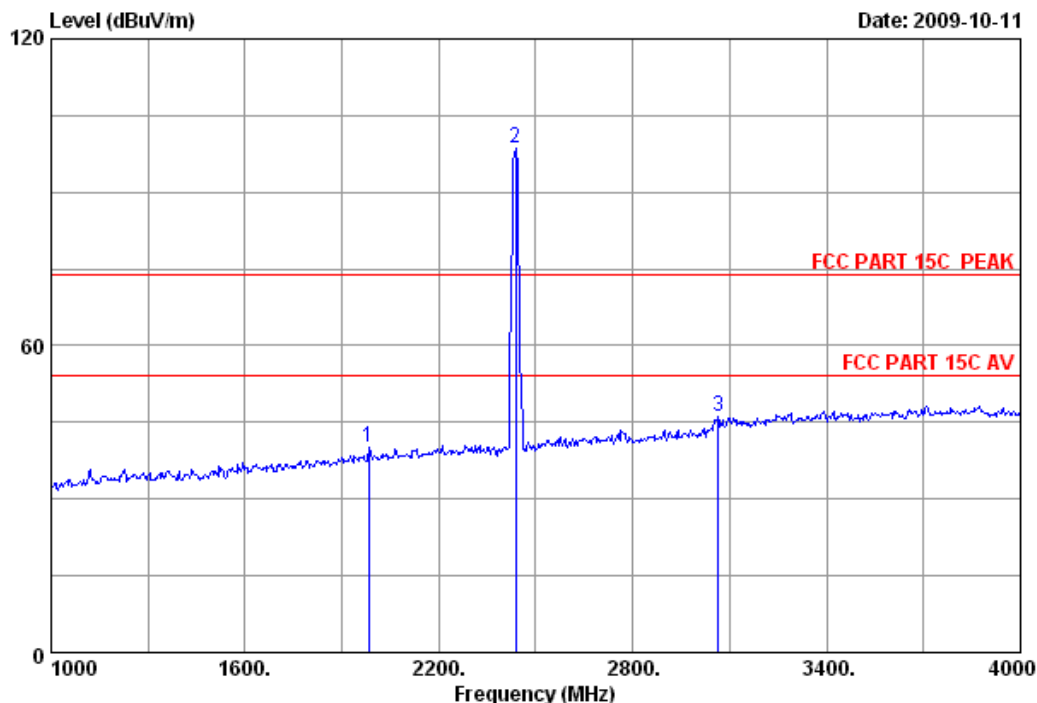

Site no. : 3m Chamber Data no. : 40  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11b CH6 2437MHz  
M/N : TL-WN722N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dbuv)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1984.000	27.83	7.76	36.06	40.59	40.12	74.00	33.88	Peak
2	2437.000	28.53	8.60	36.06	97.65	98.72	74.00	-24.72	Peak
3	3064.000	30.34	9.96	35.84	41.64	46.10	74.00	27.90	Peak

## Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 41

File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

Date: 2009-10-11

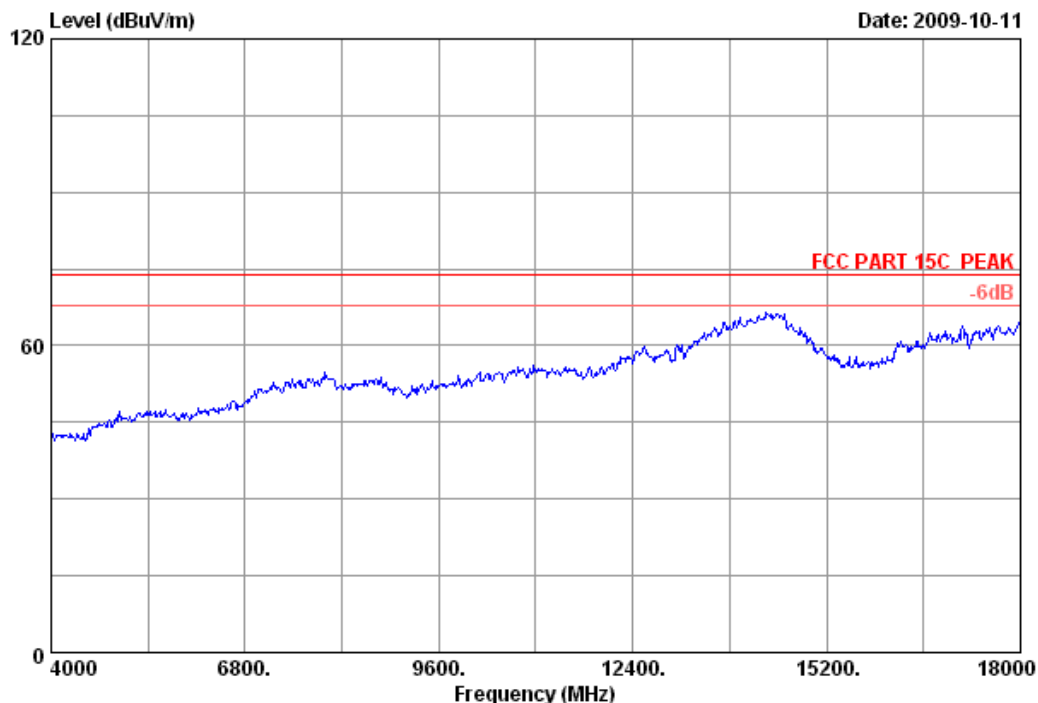


Site no.	: 3m Chamber	Data no.	: 41
Dis. / Ant.	: 3m 3115(0905)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless High Gain USB Adapter		
Power	: DC 5V From PC Input AC 120V/60Hz		
Test mode	: IEEE802.11b CH6 2437MHz		
M/N	: TL-WN722N		



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 42 File: E:\2009 report data\TP-LINK\TL-WN722N.EM6 (104)

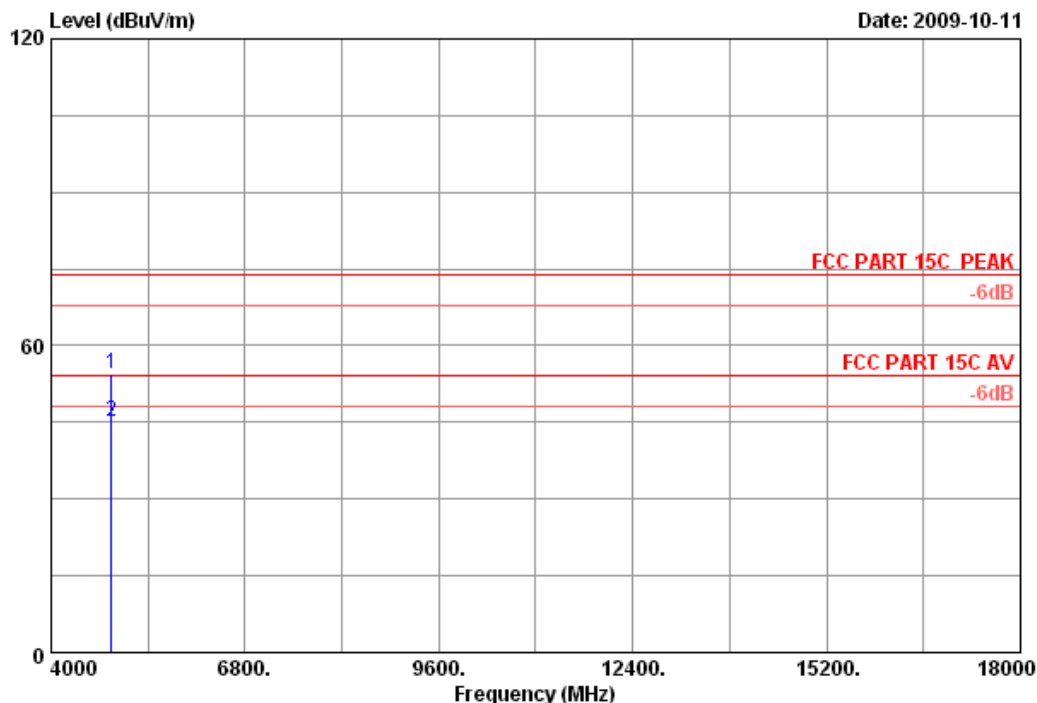

Site no. : 3m Chamber Data no. : 42  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11b CH6 2437MHz  
M/N : TL-WN722N

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dbuv)	(dBuV/m)	(dBuV/m)	(dB)	
1	4874.000	34.78	12.23	35.36	42.67	54.32	74.00	19.68	Peak
2	4874.000	34.78	12.23	35.36	33.56	45.21	54.00	8.79	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 43

File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

Date: 2009-10-11

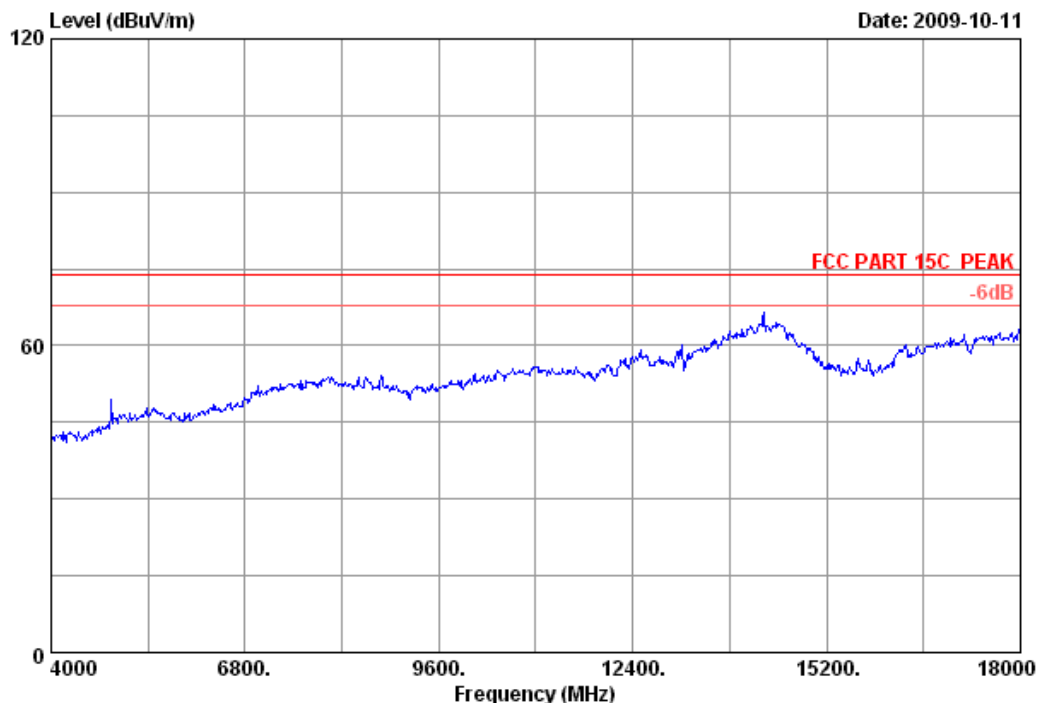


Site no.	: 3m Chamber	Data no.	: 43
Dis. / Ant.	: 3m 3115(0905)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless High Gain USB Adapter		
Power	: DC 5V From PC Input AC 120V/60Hz		
Test mode	: IEEE802.11b CH6 2437MHz		
M/N	: TL-WN722N		



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 44 File: E:\2009 report data\TP-LINK\TL-WN722N.EM6 (104)

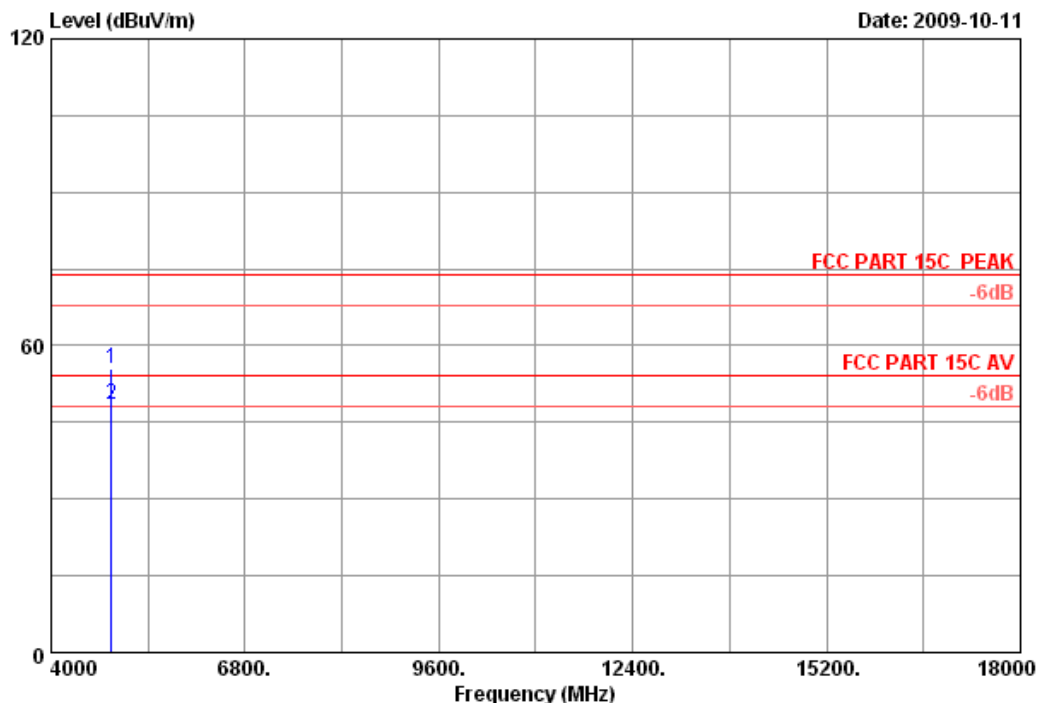

Site no. : 3m Chamber Data no. : 44  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11b CH6 2437MHz  
M/N : TL-WN722N

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dbuv)	(dBuV/m)	(dBuV/m)	(dB)	
1	4874.000	34.78	12.23	35.36	43.84	55.49	74.00	18.51	Peak
2	4874.000	34.78	12.23	35.36	36.96	48.61	54.00	5.39	Average

Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.





No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 45 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

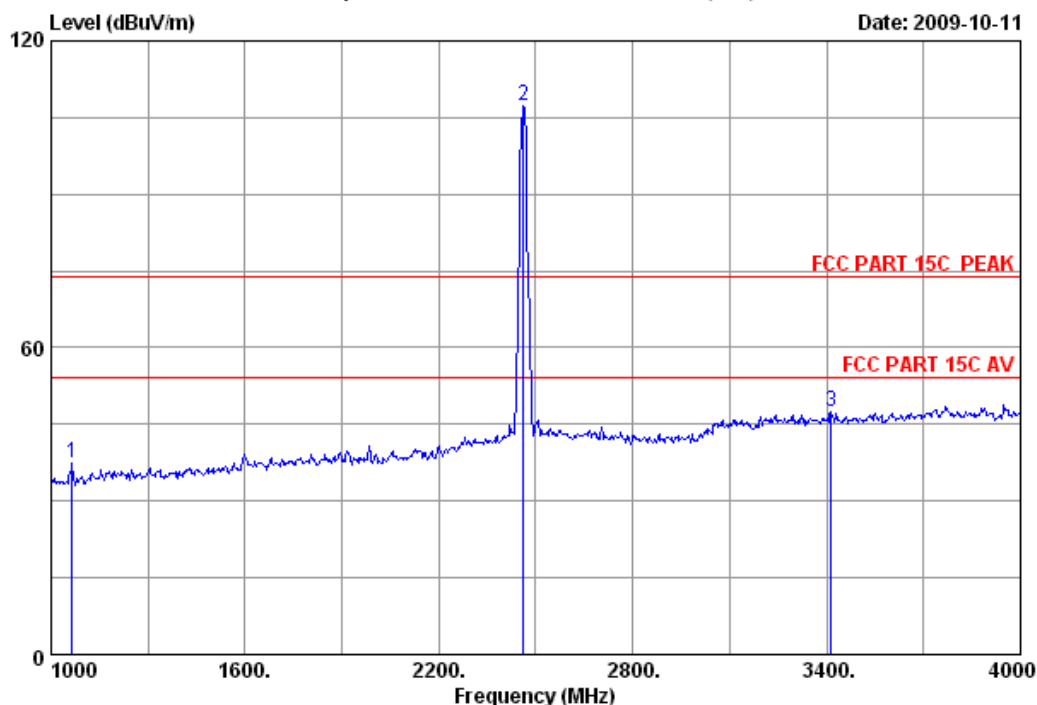

Site no. : 3m Chamber Data no. : 45  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11b CH11 2462MHz  
M/N : TL-WN722N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dbuv)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1066.000	25.30	5.74	37.26	43.80	37.58	74.00	36.42	Peak
2	2462.000	28.55	8.76	36.02	106.11	107.40	74.00	-33.40	Peak
3	3415.000	31.36	10.44	35.89	41.69	47.60	74.00	26.40	Peak


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 46 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

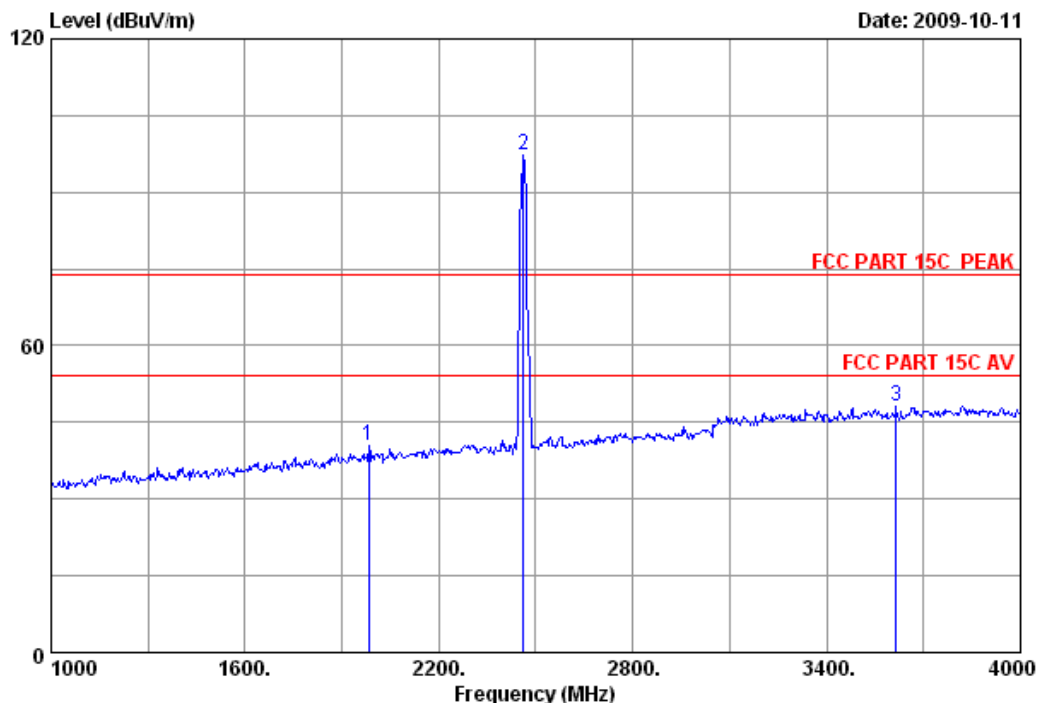

Site no. : 3m Chamber Data no. : 46  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11b CH11 2462MHz  
M/N : TL-WN722N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dbuv)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1984.000	27.83	7.76	36.06	41.07	40.60	74.00	33.40	Peak
2	2462.000	28.55	8.76	36.02	96.06	97.35	74.00	-23.35	Peak
3	3616.000	31.77	10.53	35.56	41.49	48.23	74.00	25.77	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 47

File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

Date: 2009-10-11

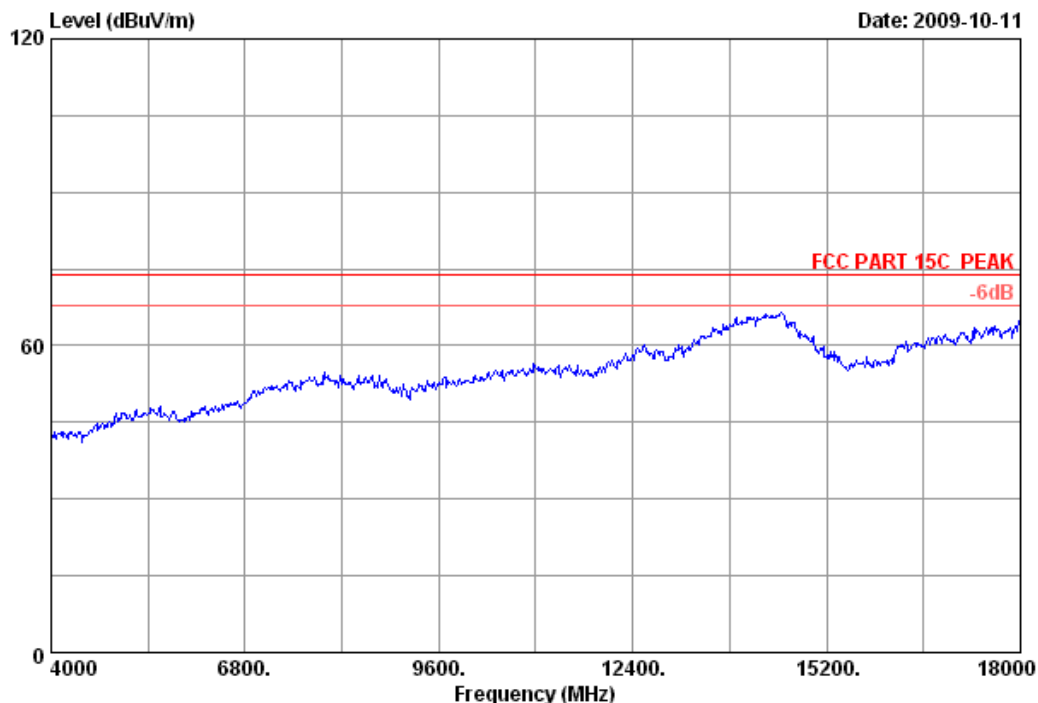

Site no.	: 3m Chamber	Data no.	: 47
Dis. / Ant.	: 3m 3115(0905)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless High Gain USB Adapter		
Power	: DC 5V From PC Input AC 120V/60Hz		
Test mode	: IEEE802.11b CH11 2462MHz		
M/N	: TL-WN722N		




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 48

File: E:\2009 report data\TP-LINK\TL-WN722N.EM6 (104)

Date: 2009-10-11

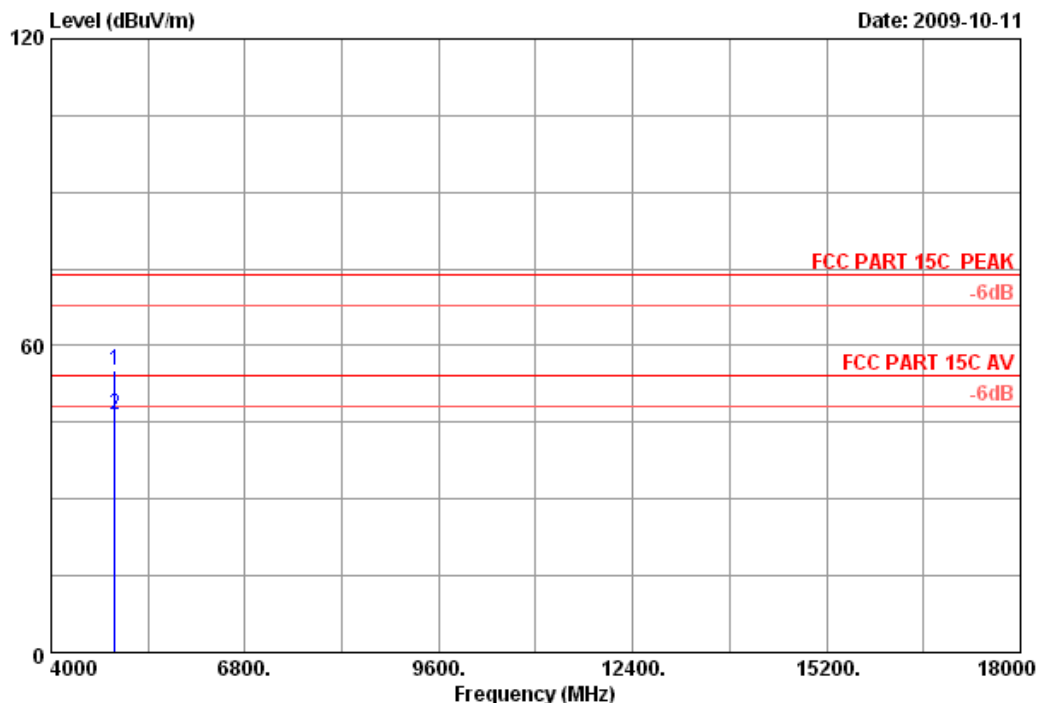

Site no. : 3m Chamber Data no. : 48  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11b CH11 2462MHz  
M/N : TL-WN722N

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dbuv)	(dBUV/m)	(dBUV/m)	(dB)	
1	4924.000	35.09	12.58	35.34	42.69	55.02	74.00	18.98	Peak
2	4924.000	35.09	12.58	35.34	33.98	46.31	54.00	7.69	Average

## Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 49

File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

Date: 2009-10-11

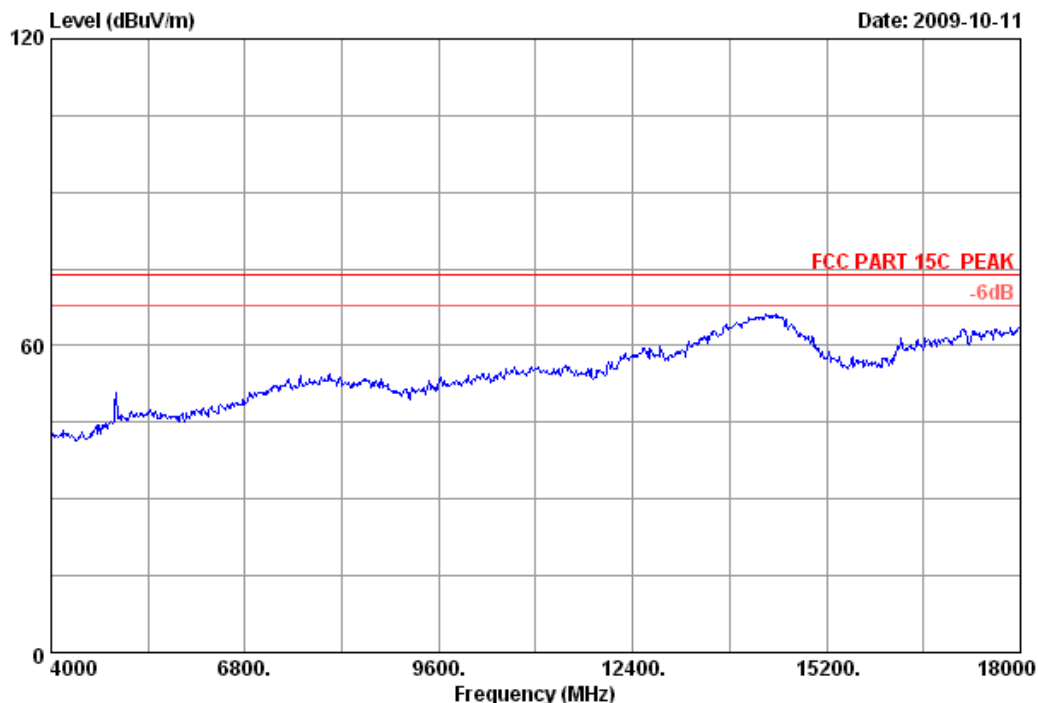


Site no.	: 3m Chamber	Data no.	: 49
Dis. / Ant.	: 3m 3115(0905)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless High Gain USB Adapter		
Power	: DC 5V From PC Input AC 120V/60Hz		
Test mode	: IEEE802.11b CH11 2462MHz		
M/N	: TL-WN722N		



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 50 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

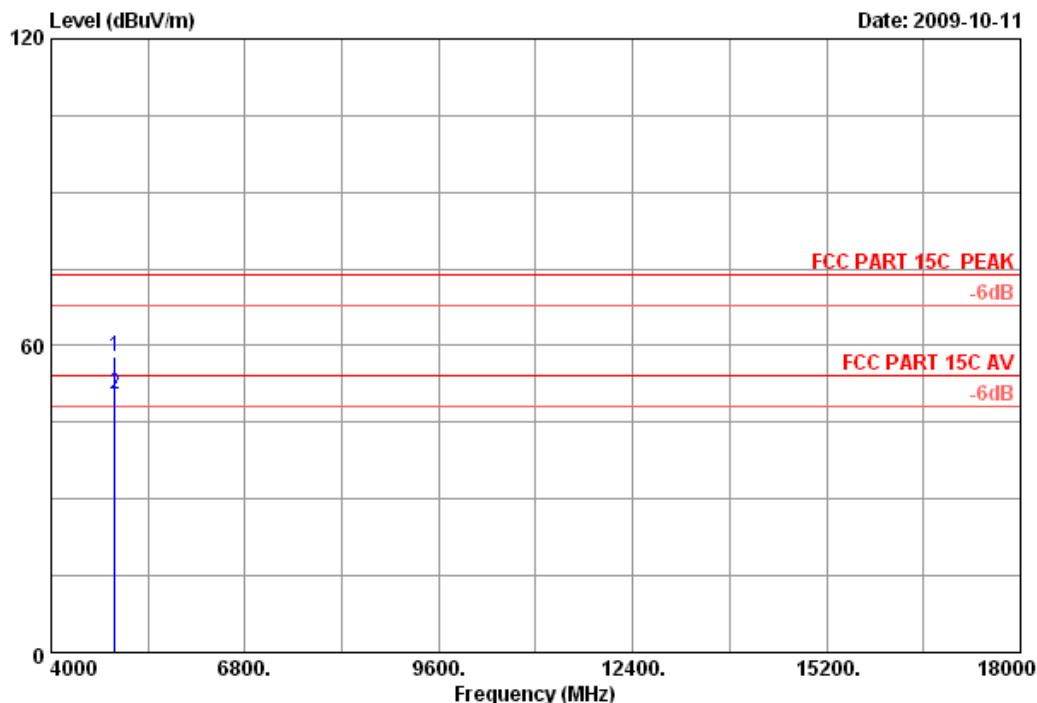

Site no. : 3m Chamber Data no. : 50  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11b CH11 2462MHz  
M/N : TL-WN722N

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dbuv)	(dBuV/m)	(dBuV/m)	(dB)	
1	4924.000	35.09	12.58	35.34	45.39	57.72	74.00	16.28	Peak
2	4924.000	35.09	12.58	35.34	38.20	50.53	54.00	3.47	Average


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 51 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

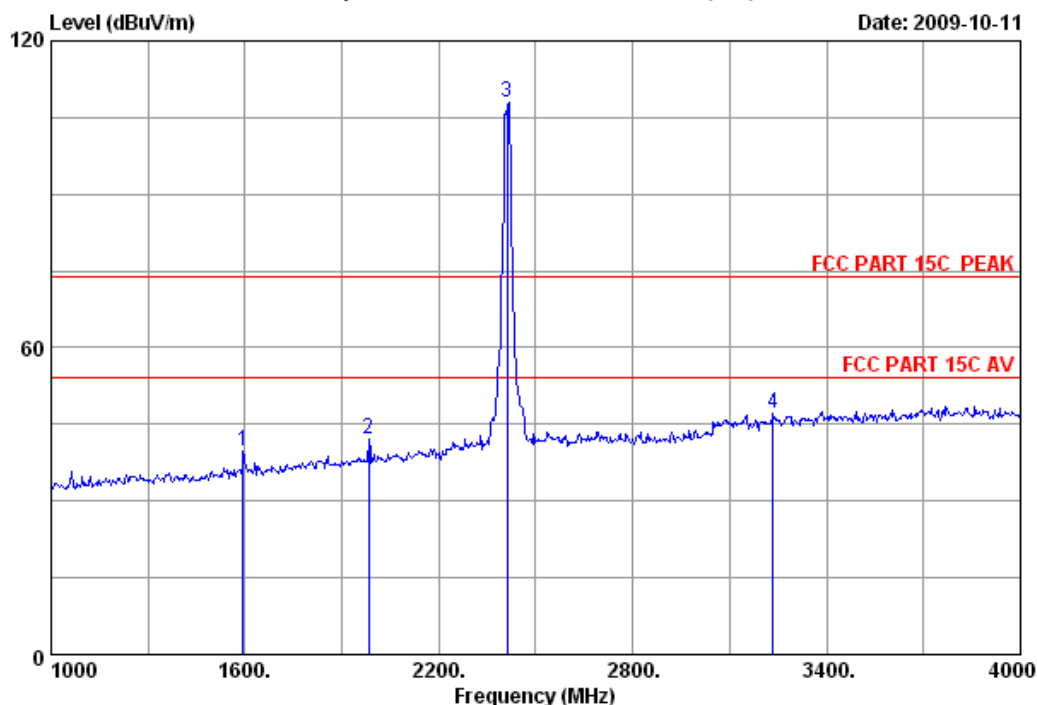

Site no. : 3m Chamber Data no. : 51  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11g CH1 2412MHz  
M/N : TL-WN722N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dbuv)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1594.000	26.30	7.09	36.43	42.70	39.66	74.00	34.34	Peak
2	1984.000	27.83	7.76	36.06	42.68	42.21	74.00	31.79	Peak
3	2412.000	28.48	8.60	35.95	106.96	108.09	74.00	-34.09	Peak
4	3235.000	30.83	10.04	35.77	42.10	47.20	74.00	26.80	Peak


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 52 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

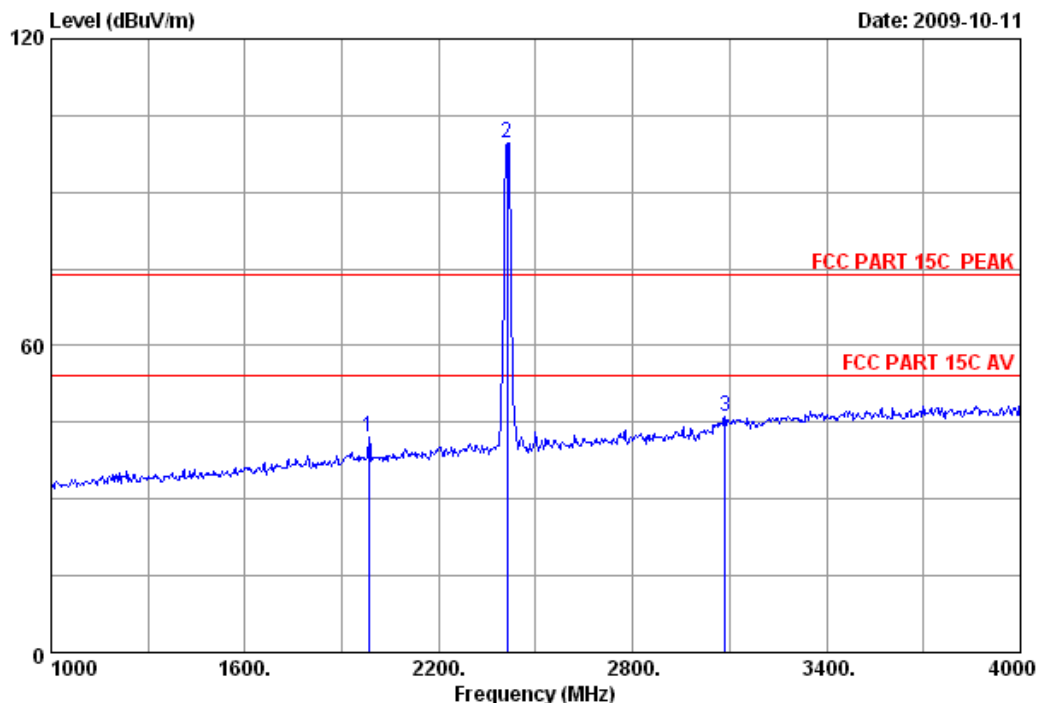

Site no. : 3m Chamber Data no. : 52  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11g CH1 2412MHz  
M/N : TL-WN722N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dbuv)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1984.000	27.83	7.76	36.06	42.64	42.17	74.00	31.83	Peak
2	2412.000	28.48	8.60	35.95	98.42	99.55	74.00	-25.55	Peak
3	3085.000	30.44	9.97	35.71	41.51	46.21	74.00	27.79	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.






No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 53

File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

Date: 2009-10-11

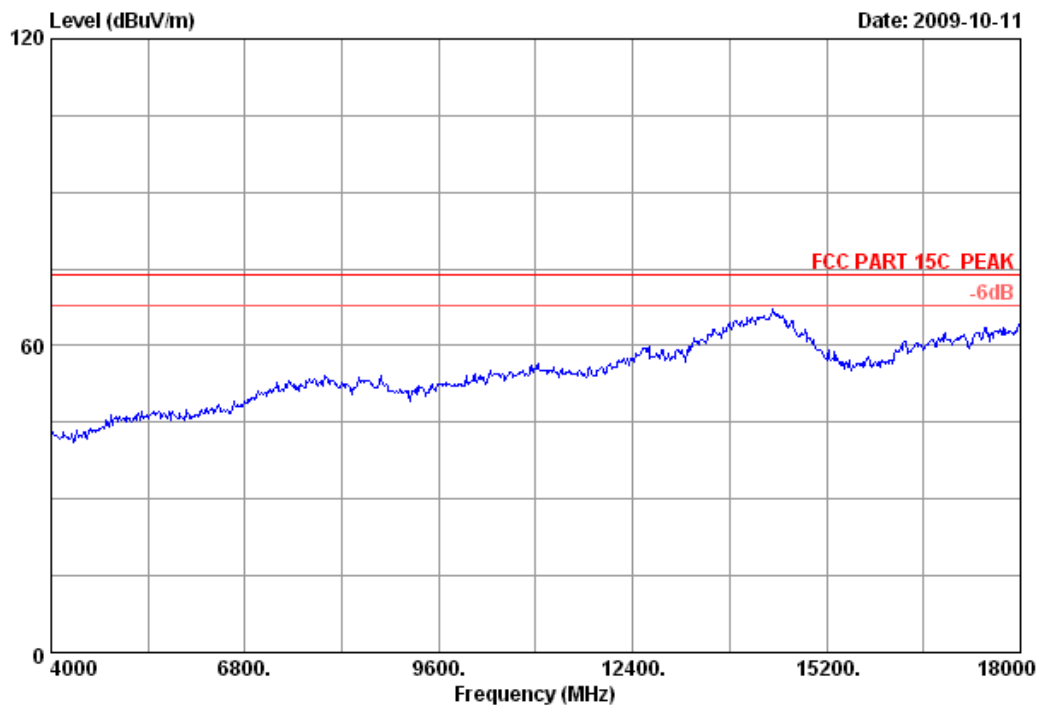


Site no.	: 3m Chamber	Data no.	: 53
Dis. / Ant.	: 3m 3115(0905)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless High Gain USB Adapter		
Power	: DC 5V From PC Input AC 120V/60Hz		
Test mode	: IEEE802.11g CH1 2412MHz		
M/N	: TL-WN722N		



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 54 File: E:\2009 report data\TP-LINK\TL-WN722N.EM6 (104)

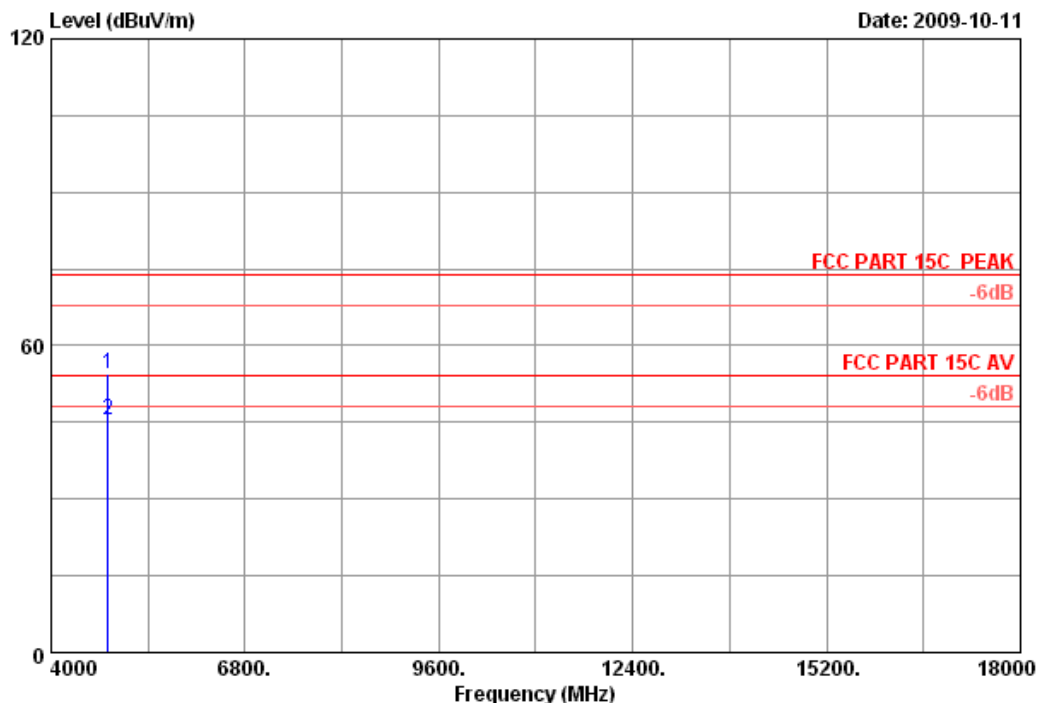

Site no. : 3m Chamber Data no. : 54  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11g CH1 2412MHz  
M/N : TL-WN722N

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dbuv)	(dBuV/m)	(dBuV/m)	(dB)	
1	4824.000	34.47	12.58	35.25	42.76	54.56	74.00	19.44	Peak
2	4824.000	34.47	12.58	35.25	33.66	45.46	54.00	8.54	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 55

File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

Date: 2009-10-11

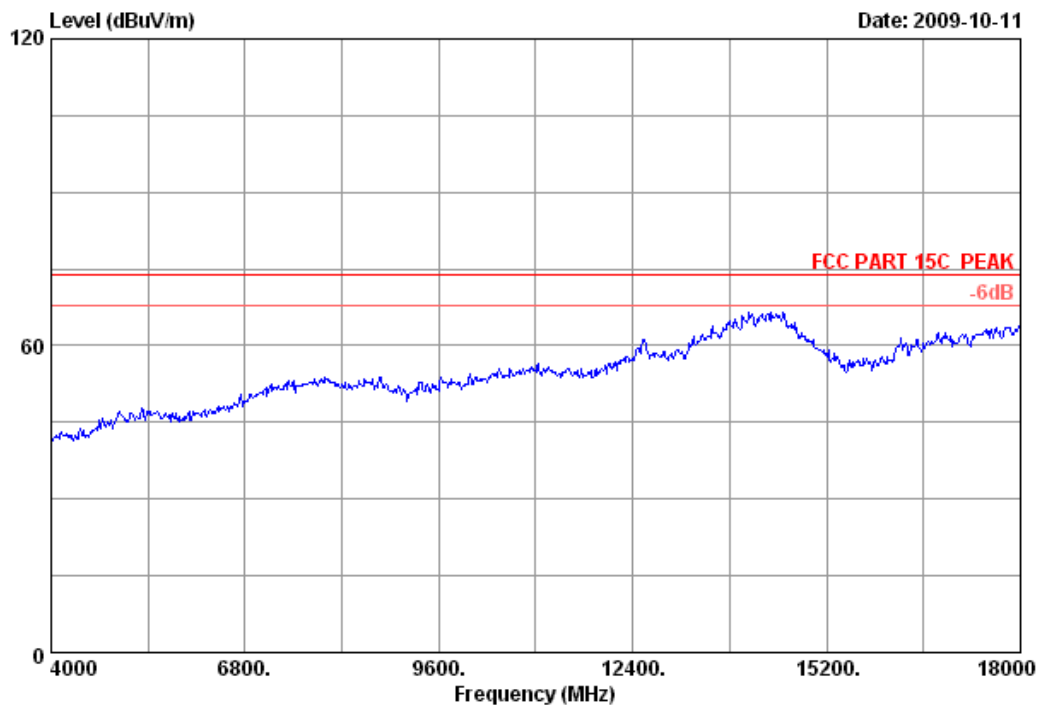


Site no.	: 3m Chamber	Data no.	: 55
Dis. / Ant.	: 3m 3115(0905)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless High Gain USB Adapter		
Power	: DC 5V From PC Input AC 120V/60Hz		
Test mode	: IEEE802.11g CH1 2412MHz		
M/N	: TL-WN722N		



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 56 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

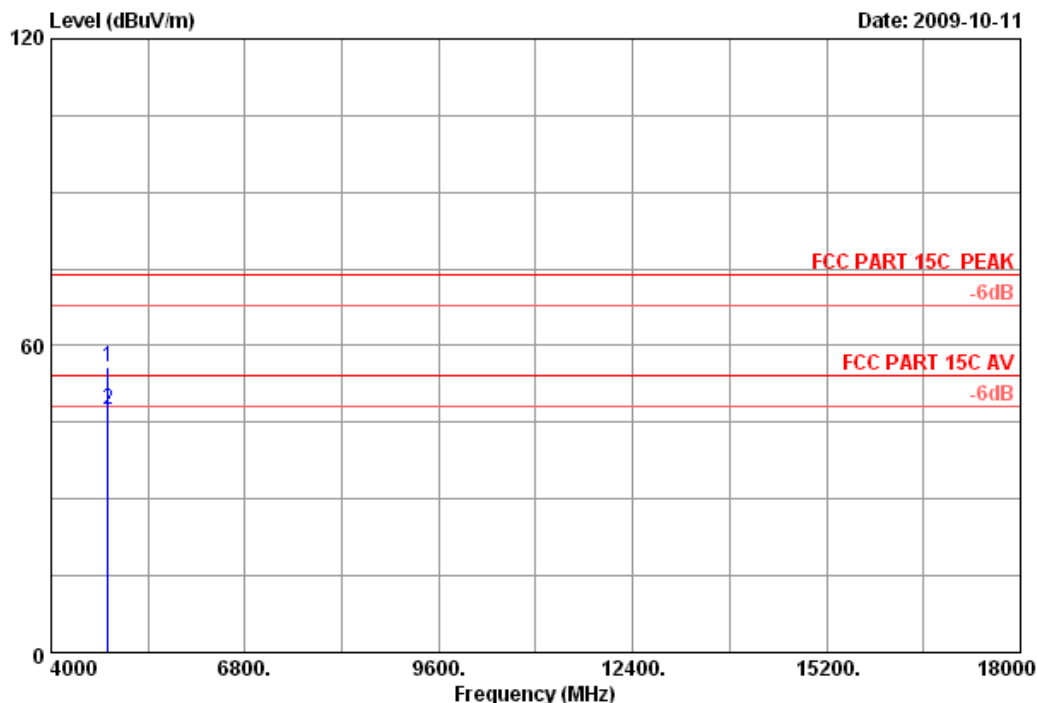

Site no. : 3m Chamber Data no. : 56  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11g CH1 2412MHz  
M/N : TL-WN722N

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dbuv)	(dBuV/m)	(dBuV/m)	(dB)	
1	4824.000	34.47	12.58	35.25	44.17	55.97	74.00	18.03	Peak
2	4824.000	34.47	12.58	35.25	35.68	47.48	54.00	6.52	Average


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 57 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

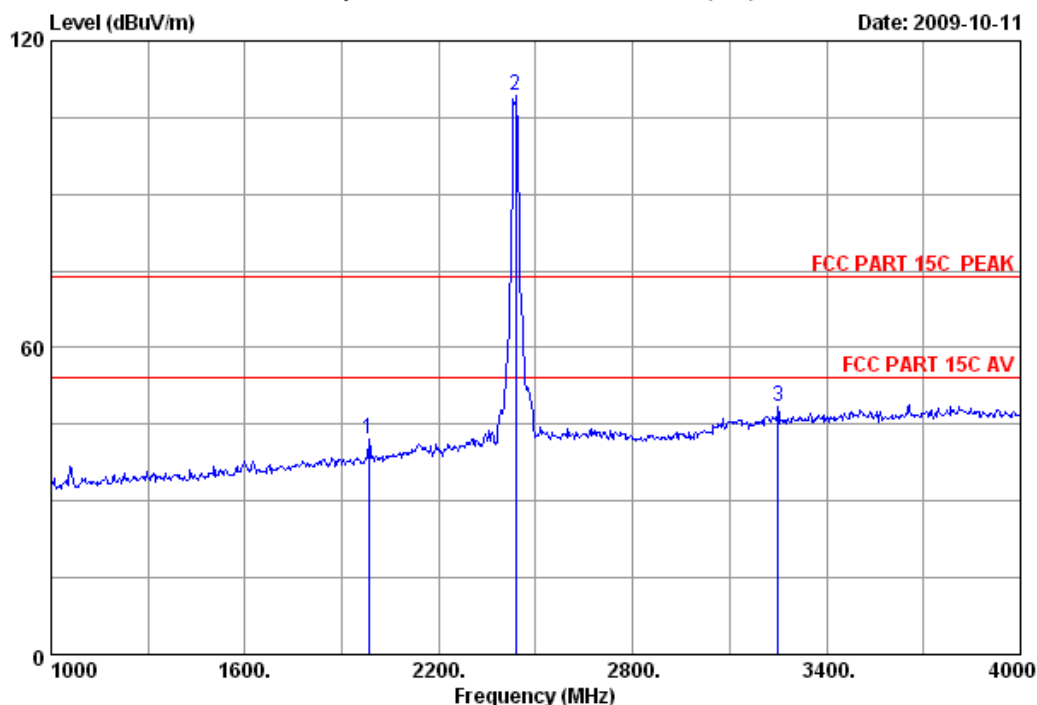

Site no. : 3m Chamber Data no. : 57  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11g CH6 2437MHz  
M/N : TL-WN722N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dbuv)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1984.000	27.83	7.76	36.06	42.51	42.04	74.00	31.96	Peak
2	2437.000	28.53	8.60	36.06	108.30	109.37	74.00	-35.37	Peak
3	3250.000	30.88	10.19	35.68	43.04	48.43	74.00	25.57	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 58

File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

Date: 2009-10-11

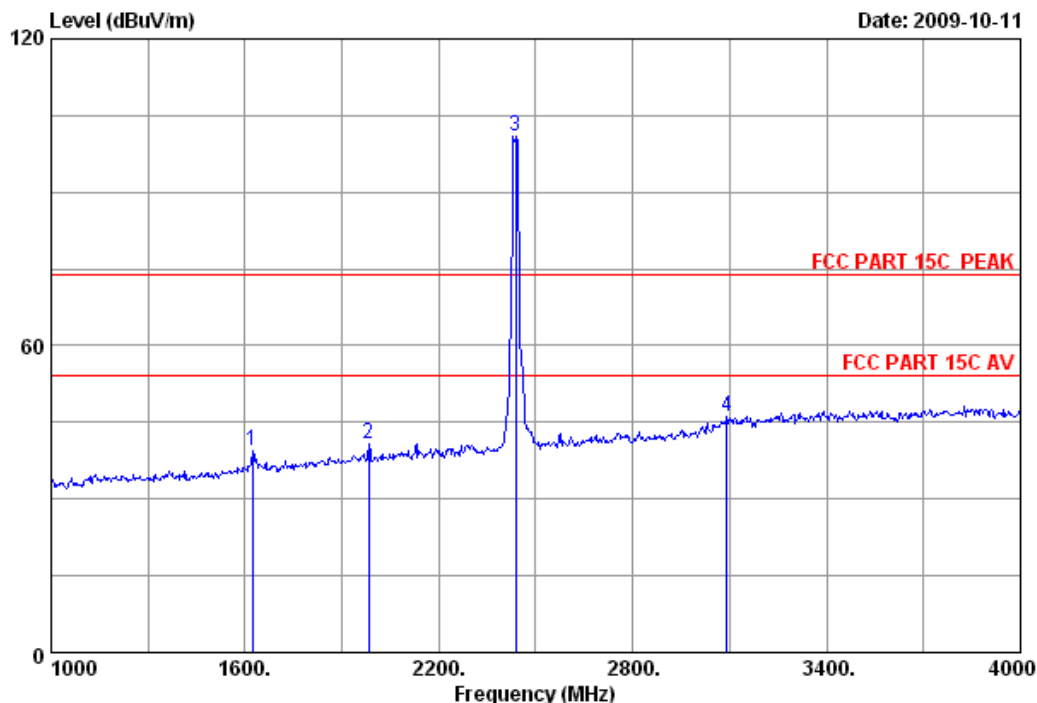

Site no. : 3m Chamber Data no. : 58  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11g CH6 2437MHz  
M/N : TL-WN722N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dbuv)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	1624.000	26.43	7.15	36.26	41.99	39.31	74.00	34.69	Peak
2	1984.000	27.83	7.76	36.06	41.24	40.77	74.00	33.23	Peak
3	2437.000	28.53	8.60	36.06	99.88	100.95	74.00	-26.95	Peak
4	3091.000	30.44	9.97	35.71	41.43	46.13	74.00	27.87	Peak

## Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 59

File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

Date: 2009-10-11

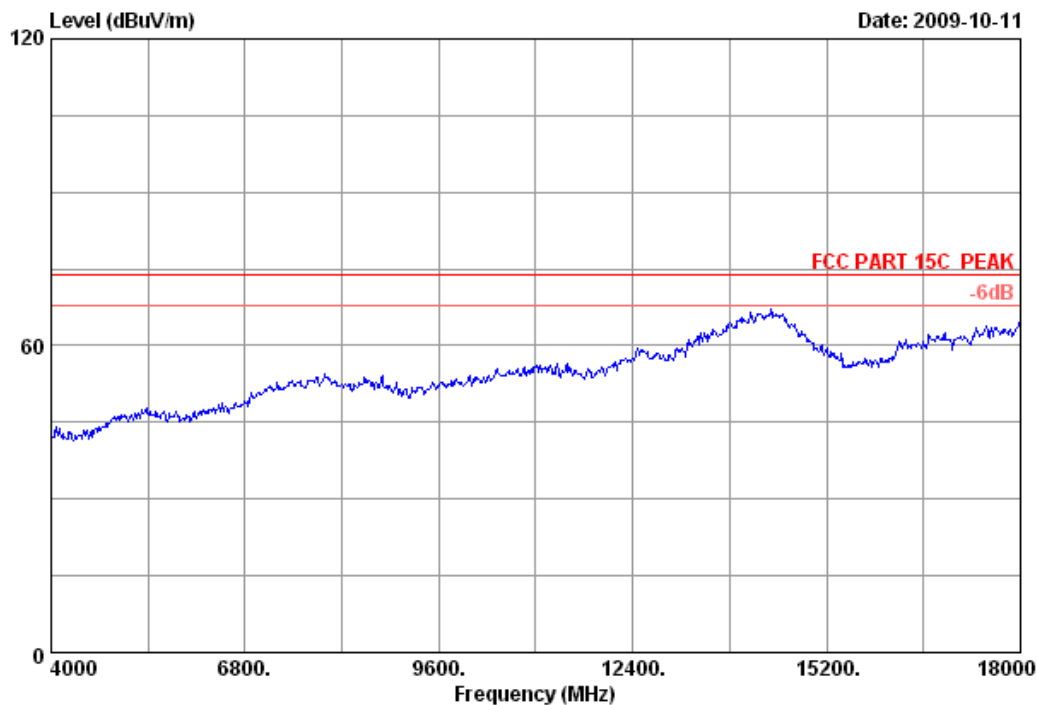


Site no.	: 3m Chamber	Data no.	: 59
Dis. / Ant.	: 3m 3115(0905)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless High Gain USB Adapter		
Power	: DC 5V From PC Input AC 120V/60Hz		
Test mode	: IEEE802.11g CH6 2437MHz		
M/N	: TL-WN722N		



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 60 File: E:\2009 report data\TP-LINK\TL-WN722N.EM6 (104)

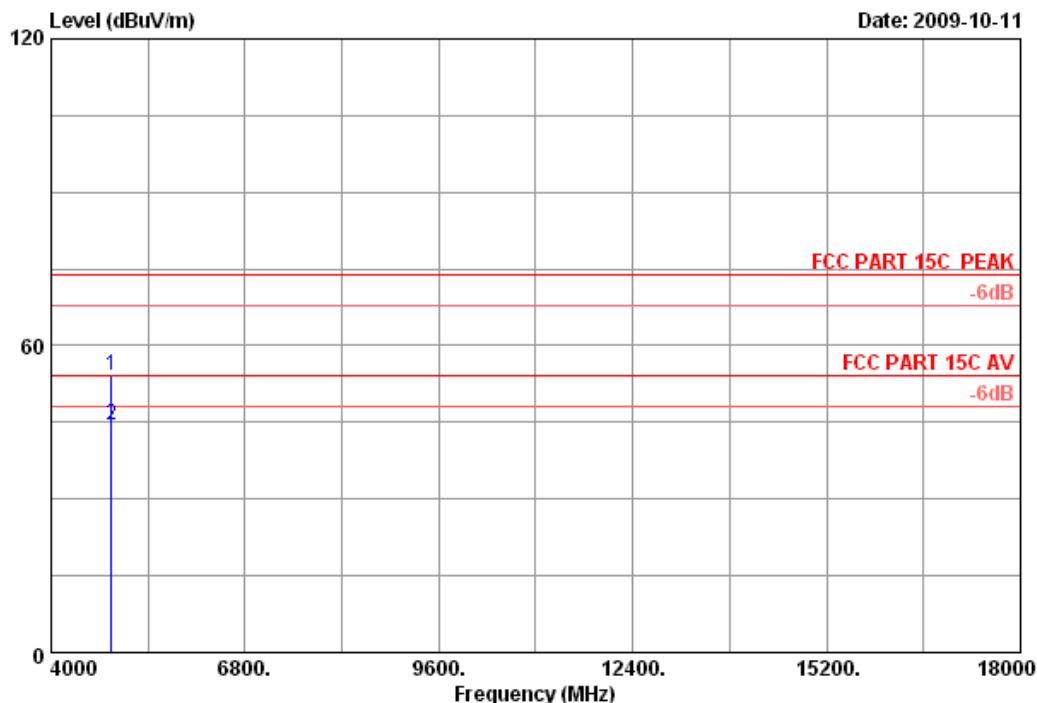

Site no. : 3m Chamber Data no. : 60  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11g CH6 2437MHz  
M/N : TL-WN722N

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dbuv)	(dBuV/m)	(dBuV/m)	(dB)	
1	4874.000	34.78	12.23	35.36	42.62	54.27	74.00	19.73	Peak
2	4874.000	34.78	12.23	35.36	32.97	44.62	54.00	9.38	Average

Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.





No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 61 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

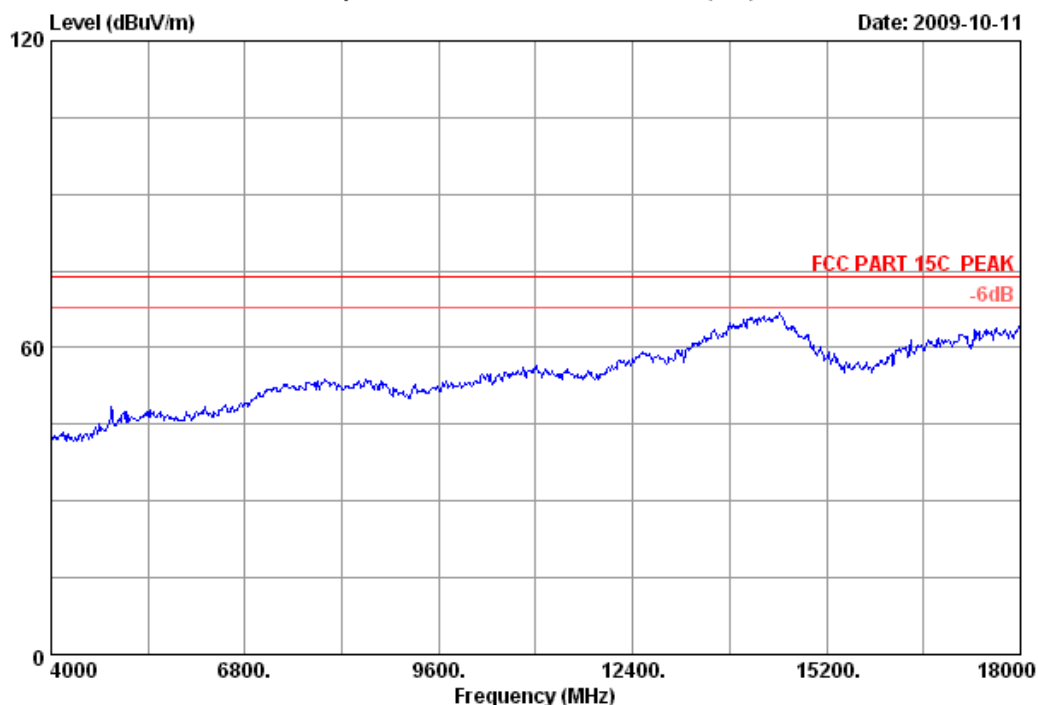


Site no.	: 3m Chamber	Data no.	: 61
Dis. / Ant.	: 3m 3115(0905)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless High Gain USB Adapter		
Power	: DC 5V From PC Input AC 120V/60Hz		
Test mode	: IEEE802.11g CH6 2437MHz		
M/N	: TL-WN722N		



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 62 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

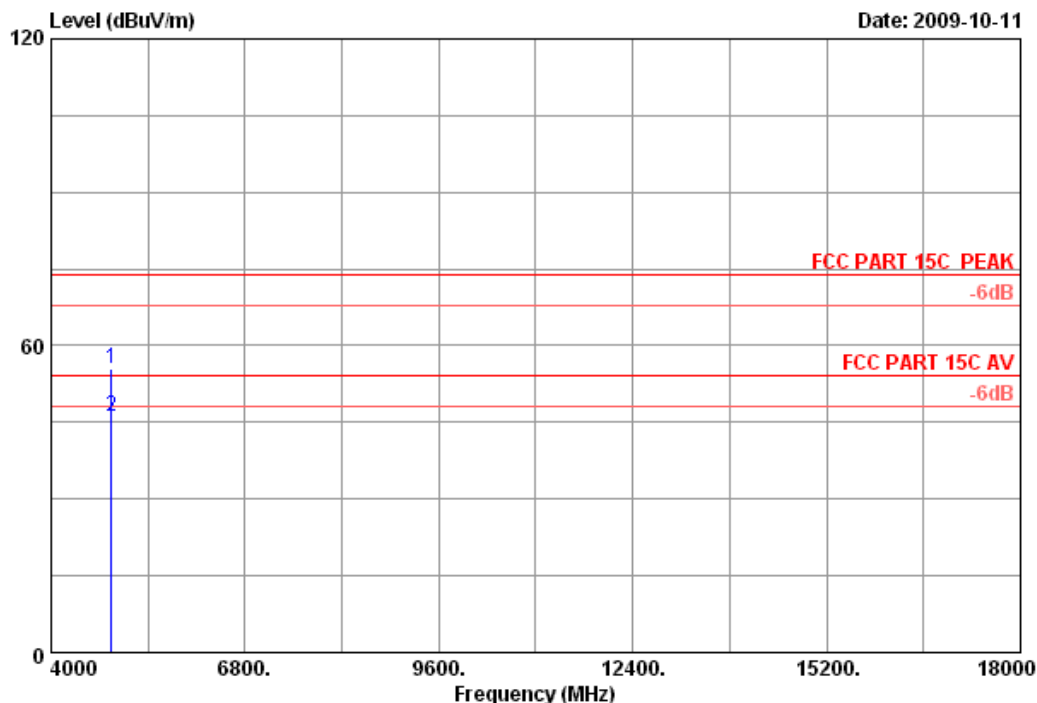

Site no. : 3m Chamber Data no. : 62  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11g CH6 2437MHz  
M/N : TL-WN722N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dbuv)	Emission			Remark
						Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	4874.000	34.78	12.23	35.36	43.82	55.47	74.00	18.53	Peak
2	4874.000	34.78	12.23	35.36	34.56	46.21	54.00	7.79	Average


Remarks:

- Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
- The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 63 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

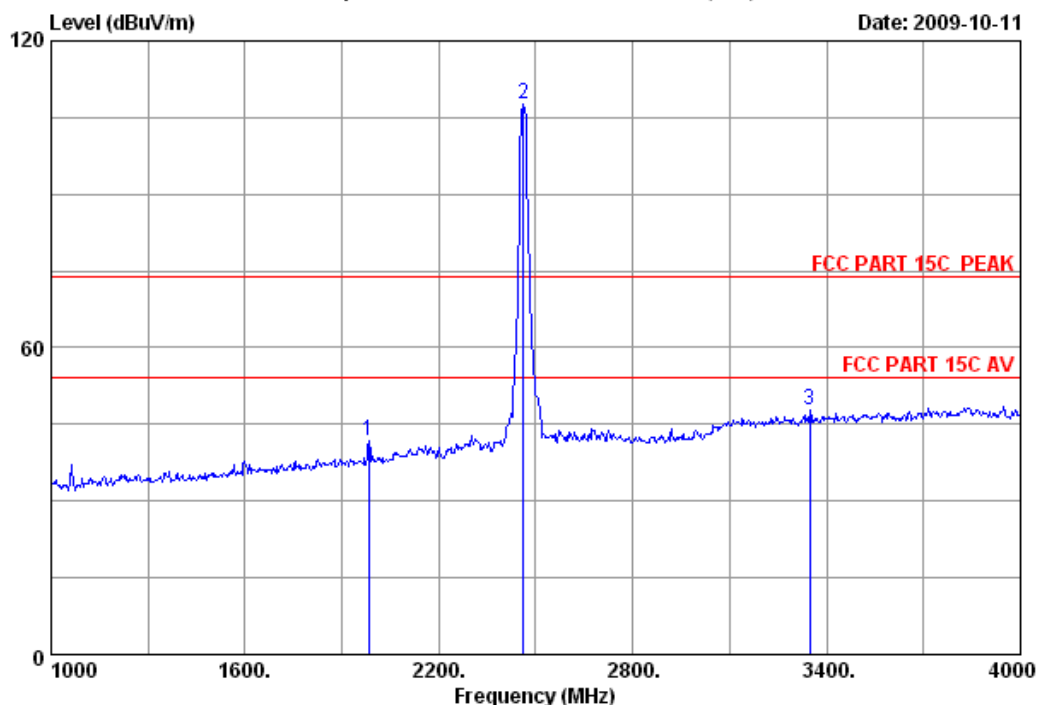

Site no. : 3m Chamber Data no. : 63  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11g CH11 2462MHz  
M/N : TL-WN722N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dbuv)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1984.000	27.83	7.76	36.06	42.23	41.76	74.00	32.24	Peak
2	2462.000	28.55	8.76	36.02	106.45	107.74	74.00	-33.74	Peak
3	3349.000	31.17	10.33	35.75	41.89	47.64	74.00	26.36	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 64

File: E:\2009 report data\TP-LINK\TL-WN722N.EM6 (104)

Date: 2009-10-11

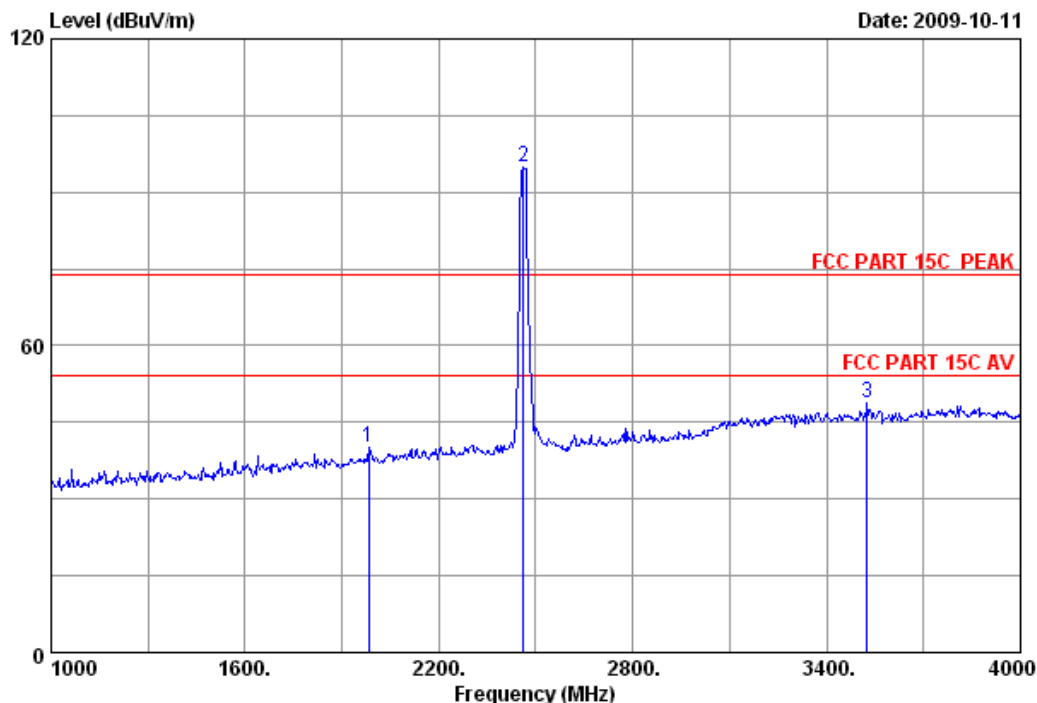

Site no. : 3m Chamber Data no. : 64  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11g CH11 2462MHz  
M/N : TL-WN722N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dbuv)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	1984.000	27.83	7.76	36.06	40.71	40.24	74.00	33.76	Peak
2	2462.000	28.55	8.76	36.02	93.72	95.01	74.00	-21.01	Peak
3	3526.000	31.65	10.56	35.63	42.30	48.88	74.00	25.12	Peak

## Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 65

File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

Date: 2009-10-11

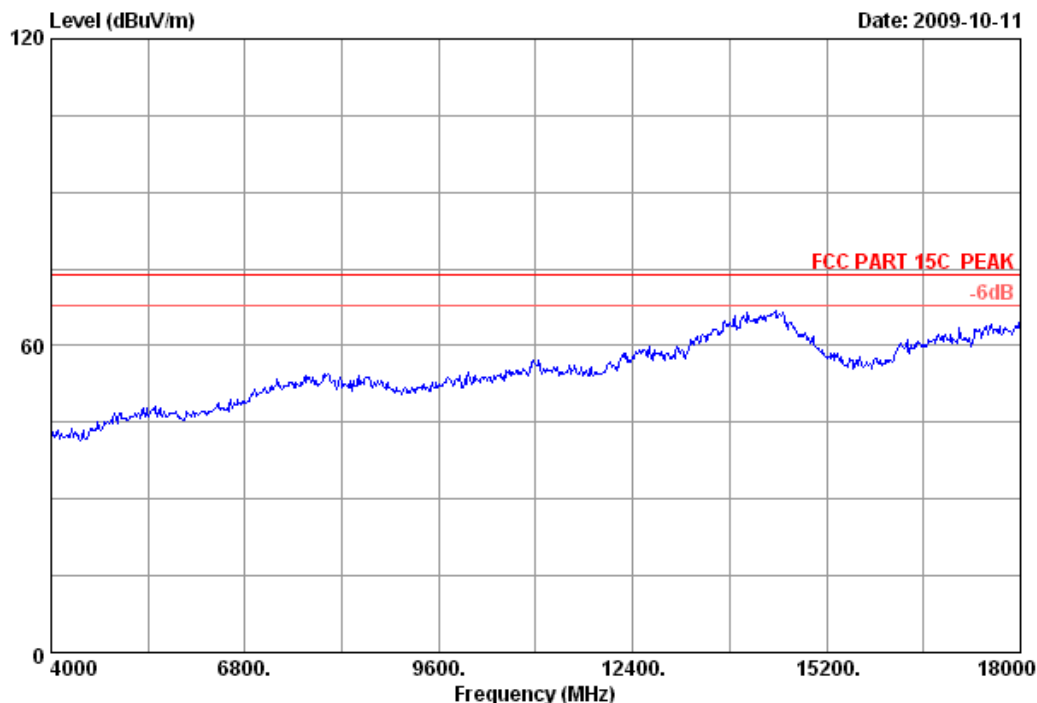


Site no.	: 3m Chamber	Data no.	: 65
Dis. / Ant.	: 3m 3115(0905)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless High Gain USB Adapter		
Power	: DC 5V From PC Input AC 120V/60Hz		
Test mode	: IEEE802.11g CH11 2462MHz		
M/N	: TL-WN722N		



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 66 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

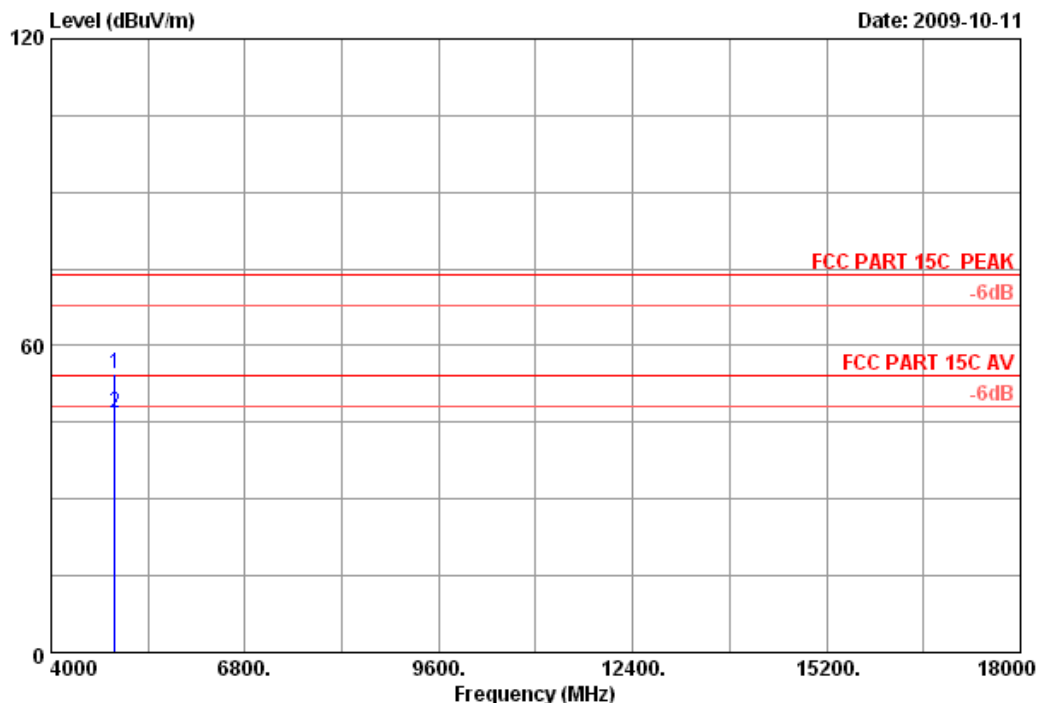

Site no. : 3m Chamber Data no. : 66  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11g CH11 2462MHz  
M/N : TL-WN722N

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dbuv)	(dBuV/m)	(dBuV/m)	(dB)	
1	4924.000	35.09	12.58	35.34	42.31	54.64	74.00	19.36	Peak
2	4924.000	35.09	12.58	35.34	34.58	46.91	54.00	7.09	Average


Remarks:

- Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
- The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 67 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

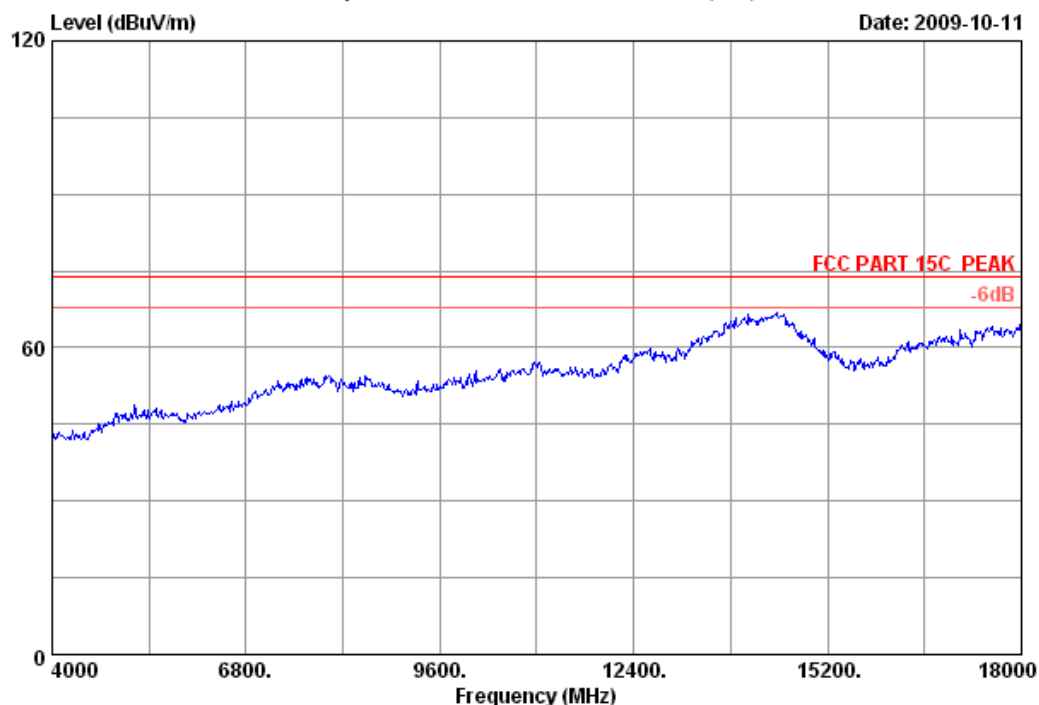


Site no.	: 3m Chamber	Data no.	: 67
Dis. / Ant.	: 3m 3115(0905)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless High Gain USB Adapter		
Power	: DC 5V From PC Input AC 120V/60Hz		
Test mode	: IEEE802.11g CH11 2462MHz		
M/N	: TL-WN722N		



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 68 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

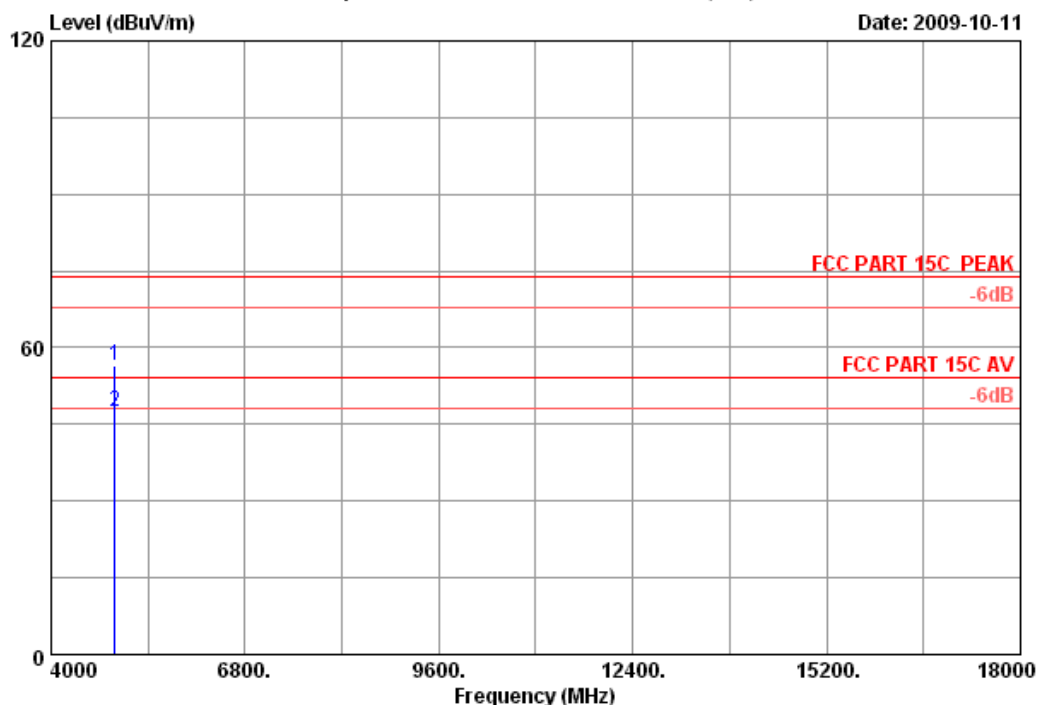

Site no. : 3m Chamber Data no. : 68  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11g CH11 2462MHz  
M/N : TL-WN722N

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dbuv)	(dBuV/m)	(dBuV/m)	(dB)	
1	4924.000	35.09	12.58	35.34	44.29	56.62	74.00	17.38	Peak
2	4924.000	35.09	12.58	35.34	35.24	47.57	54.00	6.43	Average

Remarks:


- Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
- The emission levels that are 20dB below the official limit are not reported.





No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 69 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

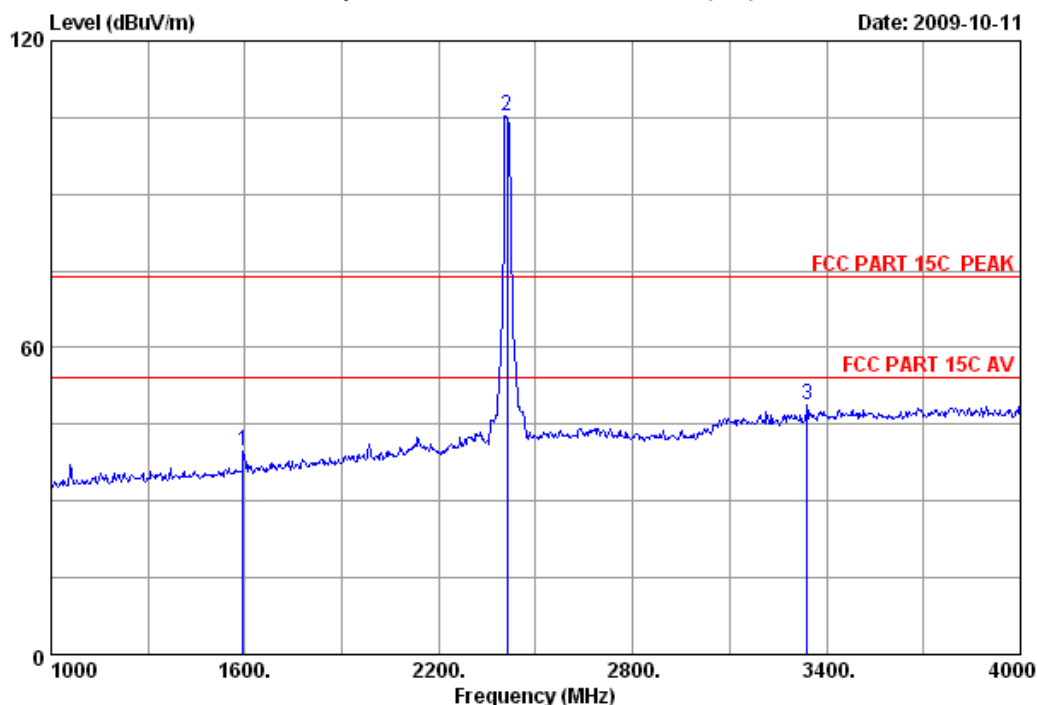

Site no. : 3m Chamber Data no. : 69  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11n HT20 CH1 2412MHz  
M/N : TL-WN722N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dbuv)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1594.000	26.30	7.09	36.43	42.68	39.64	74.00	34.36	Peak
2	2412.000	28.48	8.60	35.95	104.27	105.40	74.00	-31.40	Peak
3	3340.000	31.17	10.33	35.75	43.16	48.91	74.00	25.09	Peak


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 70 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

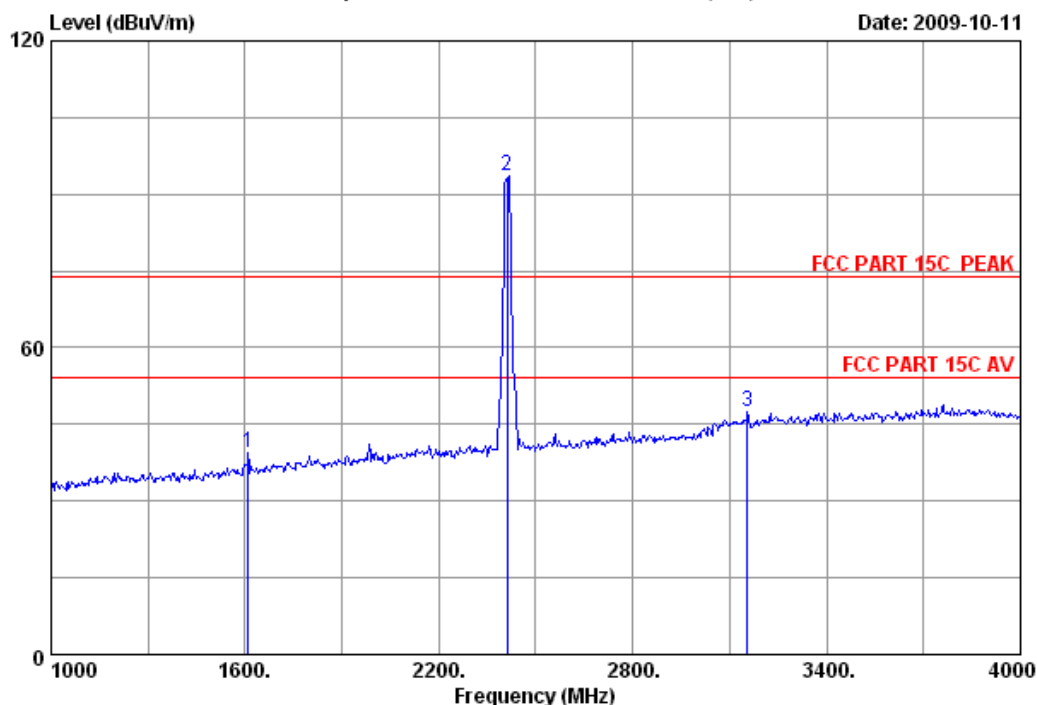

Site no. : 3m Chamber Data no. : 70  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11n HT20 CH1 2412MHz  
M/N : TL-WN722N

	Freq.	Ant.	Cable	Amp.		Emission			
	(MHz)	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dbuv)	(dBuV/m)	(dBuV/m)	(dB)	
1	1609.000	26.37	7.15	36.35	42.32	39.49	74.00	34.51	Peak
2	2412.000	28.48	8.60	35.95	92.47	93.60	74.00	-19.60	Peak
3	3154.000	30.63	10.06	35.80	42.47	47.36	74.00	26.64	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 71

File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

Date: 2009-10-11

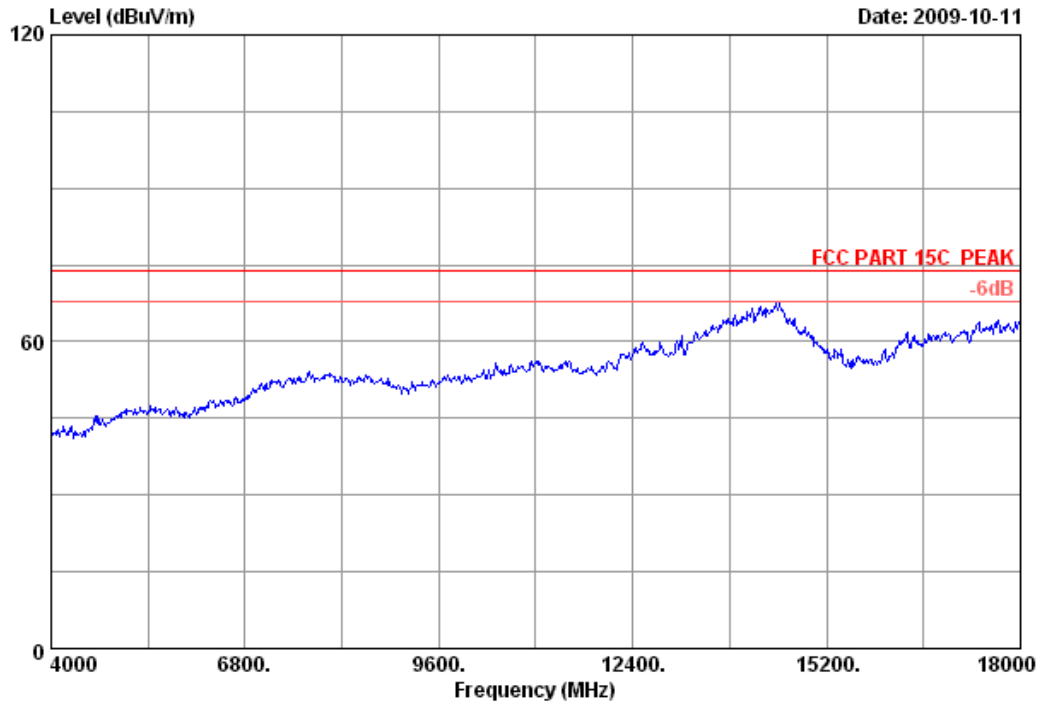


Site no.	: 3m Chamber	Data no.	: 71
Dis. / Ant.	: 3m 3115(0905)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless High Gain USB Adapter		
Power	: DC 5V From PC Input AC 120V/60Hz		
Test mode	: IEEE802.11n HT20 CH1 2412MHz		
M/N	: TL-WN722N		



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 72 File: E:\2009 report data\TP-LINK\TL-WN722N.EM6 (104)

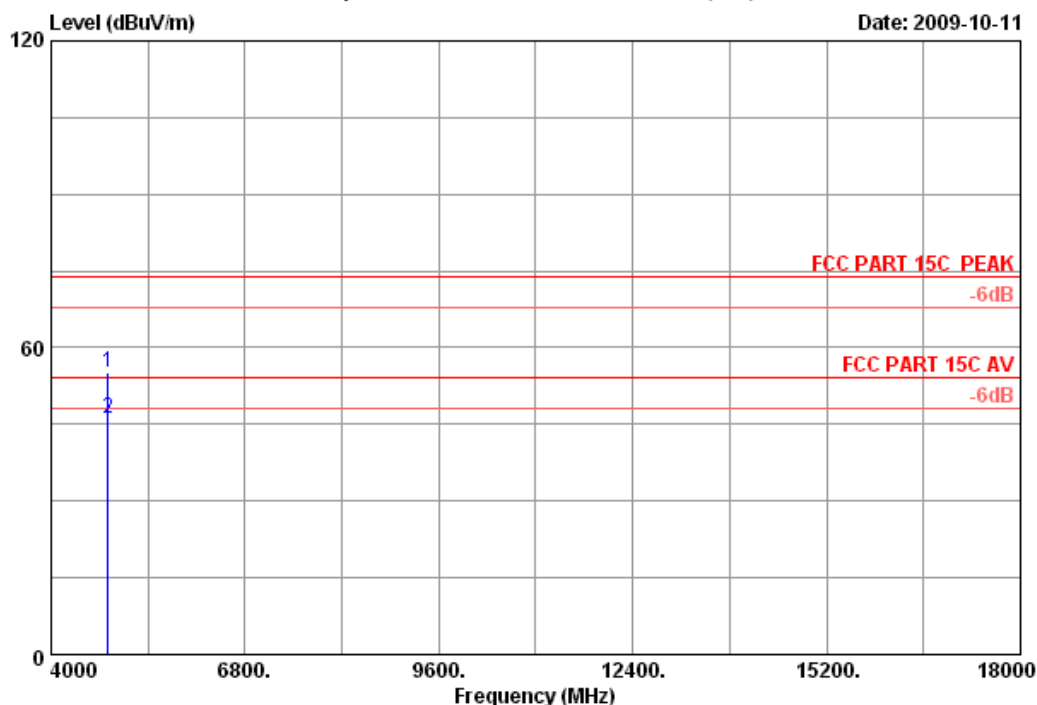

Site no. : 3m Chamber Data no. : 72  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11n HT20 CH1 2412MHz  
M/N : TL-WN722N

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dbuv)	(dBuV/m)	(dBuV/m)	(dB)	
1	4824.000	34.47	12.58	35.25	43.37	55.17	74.00	18.83	Peak
2	4824.000	34.47	12.58	35.25	34.23	46.03	54.00	7.97	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 73

File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

Date: 2009-10-11

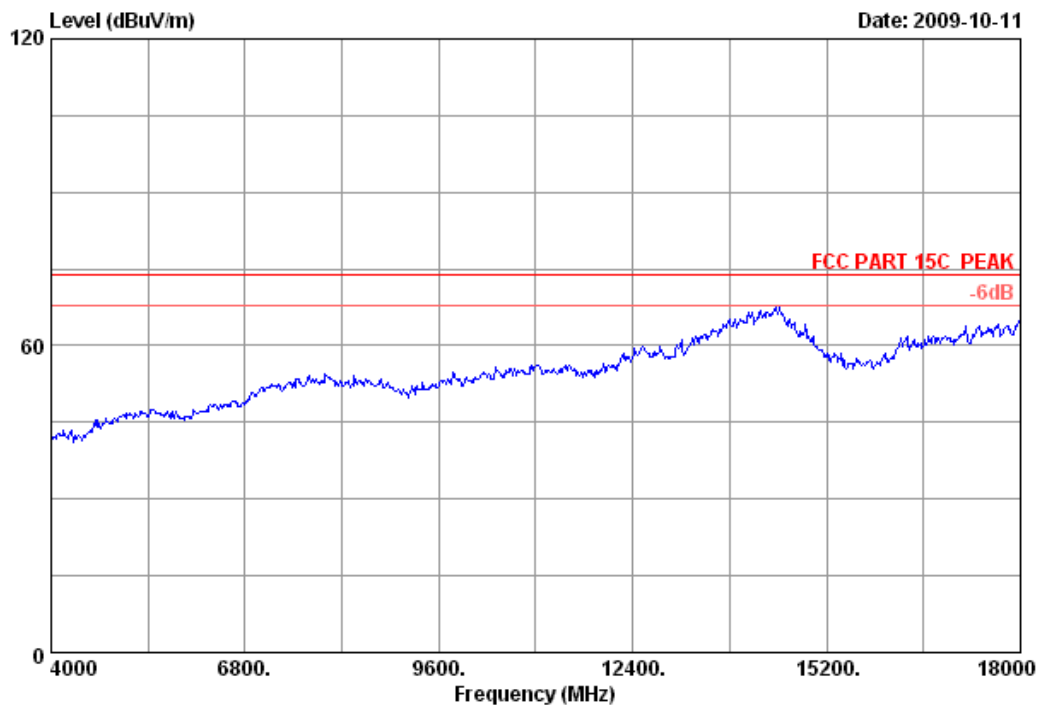


Site no.	: 3m Chamber	Data no.	: 73
Dis. / Ant.	: 3m 3115(0905)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless High Gain USB Adapter		
Power	: DC 5V From PC Input AC 120V/60Hz		
Test mode	: IEEE802.11n HT20 CH1 2412MHz		
M/N	: TL-WN722N		



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 74 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

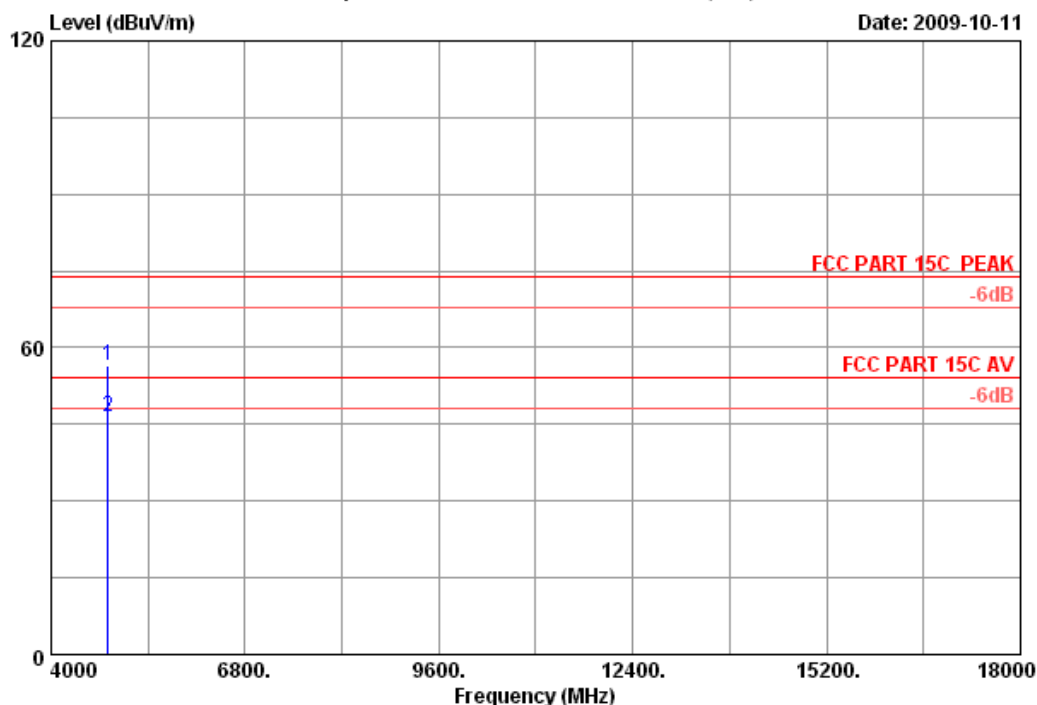

Site no. : 3m Chamber Data no. : 74  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11n HT20 CH1 2412MHz  
M/N : TL-WN722N

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dbuv)	(dBuV/m)	(dBuV/m)	(dB)	
1	4824.000	34.47	12.58	35.25	44.61	56.41	74.00	17.59	Peak
2	4824.000	34.47	12.58	35.25	34.63	46.43	54.00	7.57	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 75

File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

Date: 2009-10-11

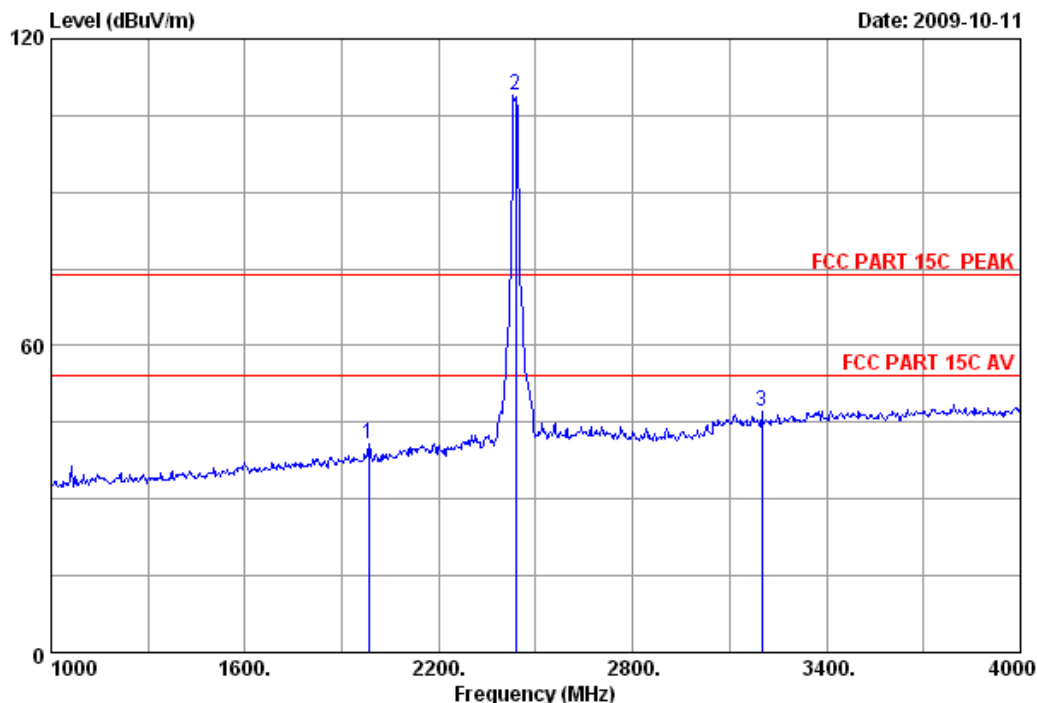

Site no. : 3m Chamber Data no. : 75  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11n HT20 CH6 2437MHz  
M/N : TL-WN722N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dbuv)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	1984.000	27.83	7.76	36.06	41.11	40.64	74.00	33.36	Peak
2	2437.000	28.53	8.60	36.06	107.80	108.87	74.00	-34.87	Peak
3	3199.000	30.73	9.88	35.93	42.37	47.05	74.00	26.95	Peak


## Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 76 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

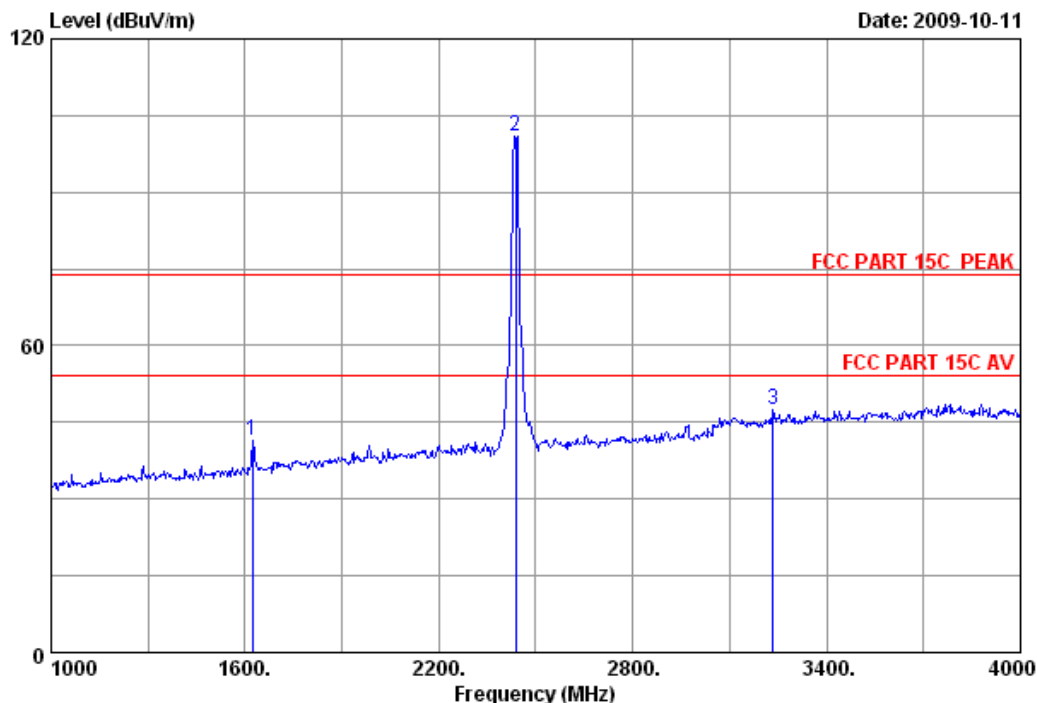

Site no. : 3m Chamber Data no. : 76  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11n HT20 CH6 2437MHz  
M/N : TL-WN722N

	Freq.	Ant.	Cable	Amp.		Emission			
	(MHz)	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dbuv)	(dBuV/m)	(dBuV/m)	(dB)	
1	1624.000	26.43	7.15	36.26	44.28	41.60	74.00	32.40	Peak
2	2437.000	28.53	8.60	36.06	99.91	100.98	74.00	-26.98	Peak
3	3235.000	30.83	10.04	35.77	42.33	47.43	74.00	26.57	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.






No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 77

File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

Date: 2009-10-11

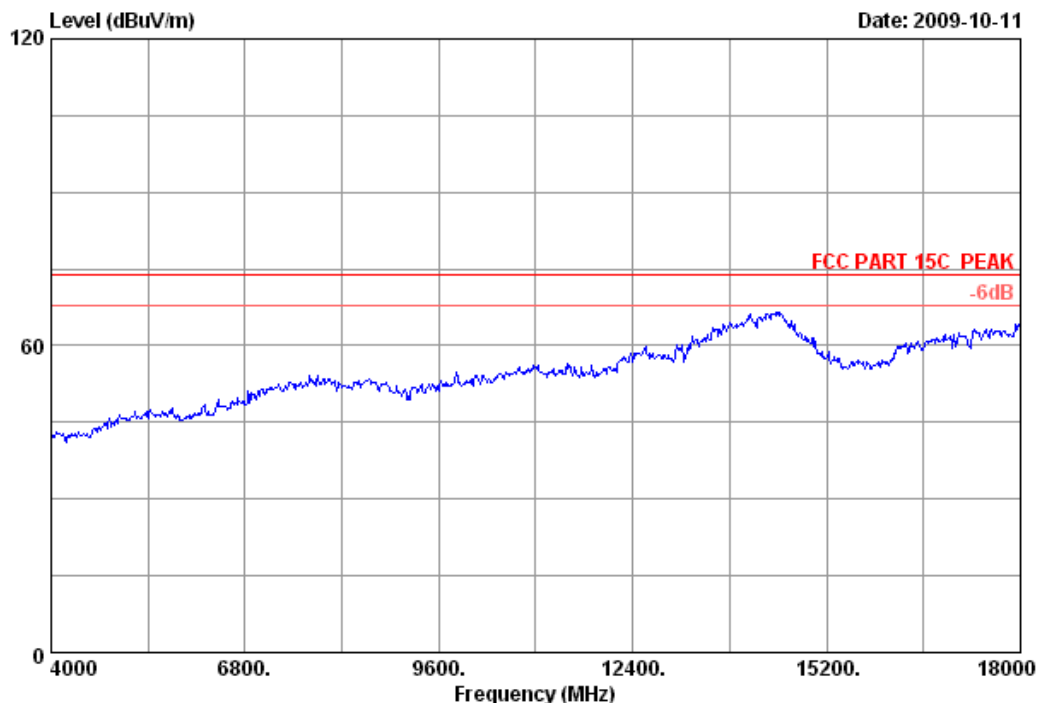


Site no.	: 3m Chamber	Data no.	: 77
Dis. / Ant.	: 3m 3115(0905)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless High Gain USB Adapter		
Power	: DC 5V From PC Input AC 120V/60Hz		
Test mode	: IEEE802.11n HT20 CH6 2437MHz		
M/N	: TL-WN722N		



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 78 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

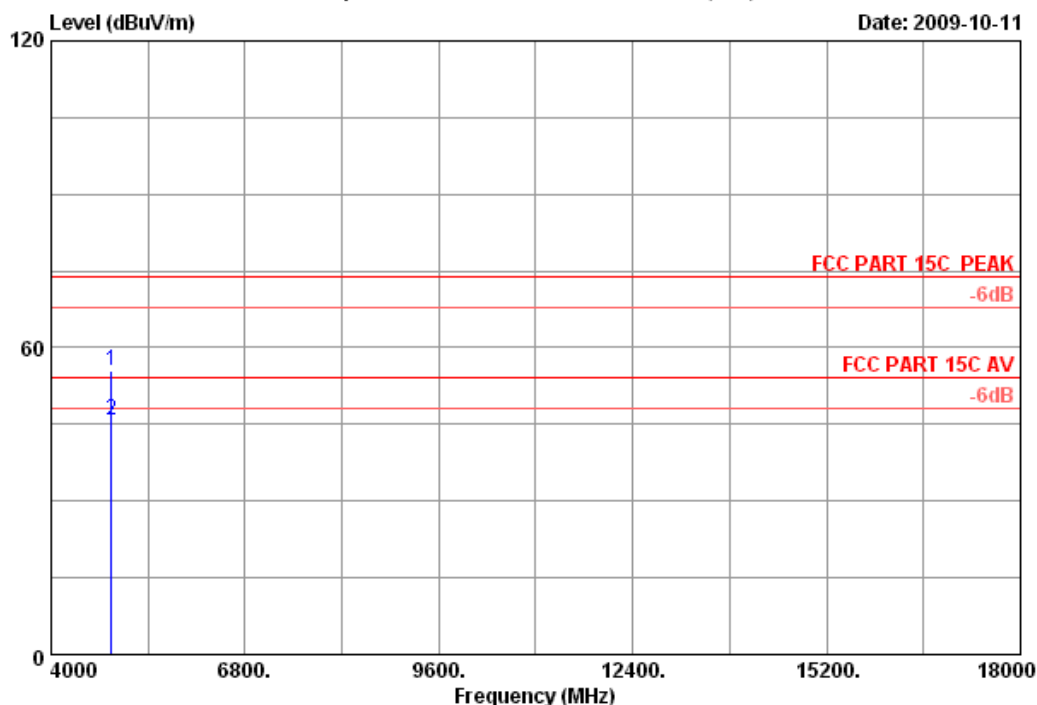

Site no. : 3m Chamber Data no. : 78  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11n HT20 CH6 2437MHz  
M/N : TL-WN722N

	Freq.	Ant.	Cable	Amp.		Emission			
	(MHz)	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dbuv)	(dBuV/m)	(dBuV/m)	(dB)	
1	4874.000	34.78	12.23	35.36	43.68	55.33	74.00	18.67	Peak
2	4874.000	34.78	12.23	35.36	34.20	45.85	54.00	8.15	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 79

File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

Date: 2009-10-11

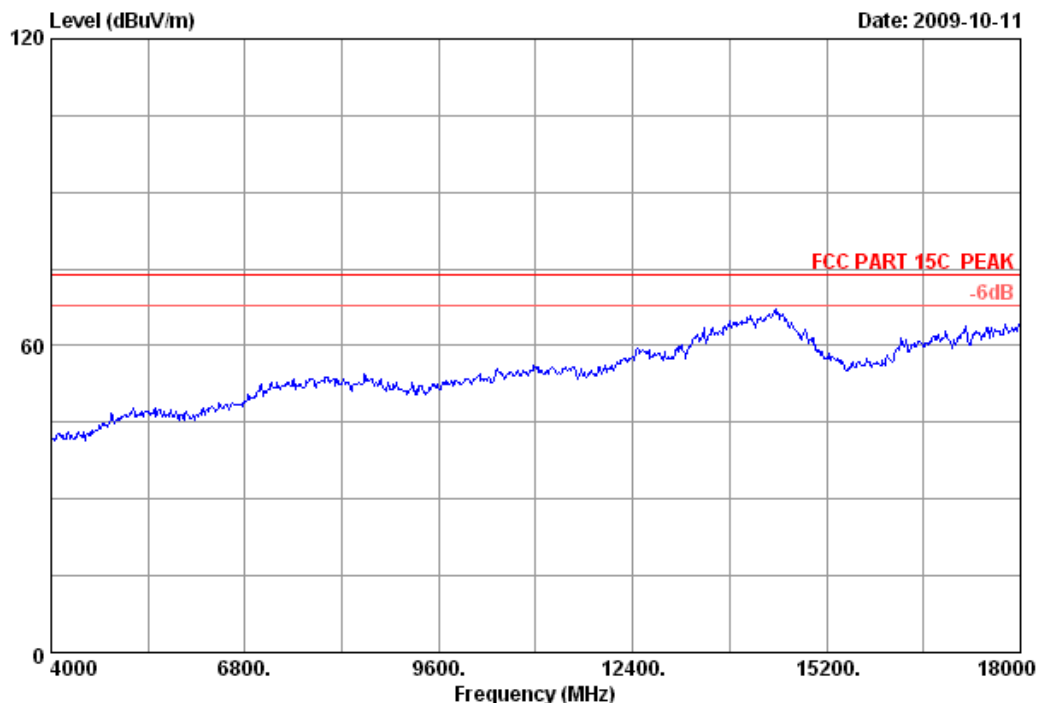


Site no.	: 3m Chamber	Data no.	: 79
Dis. / Ant.	: 3m 3115(0905)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless High Gain USB Adapter		
Power	: DC 5V From PC Input AC 120V/60Hz		
Test mode	: IEEE802.11n HT20 CH6 2437MHz		
M/N	: TL-WN722N		



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 80 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

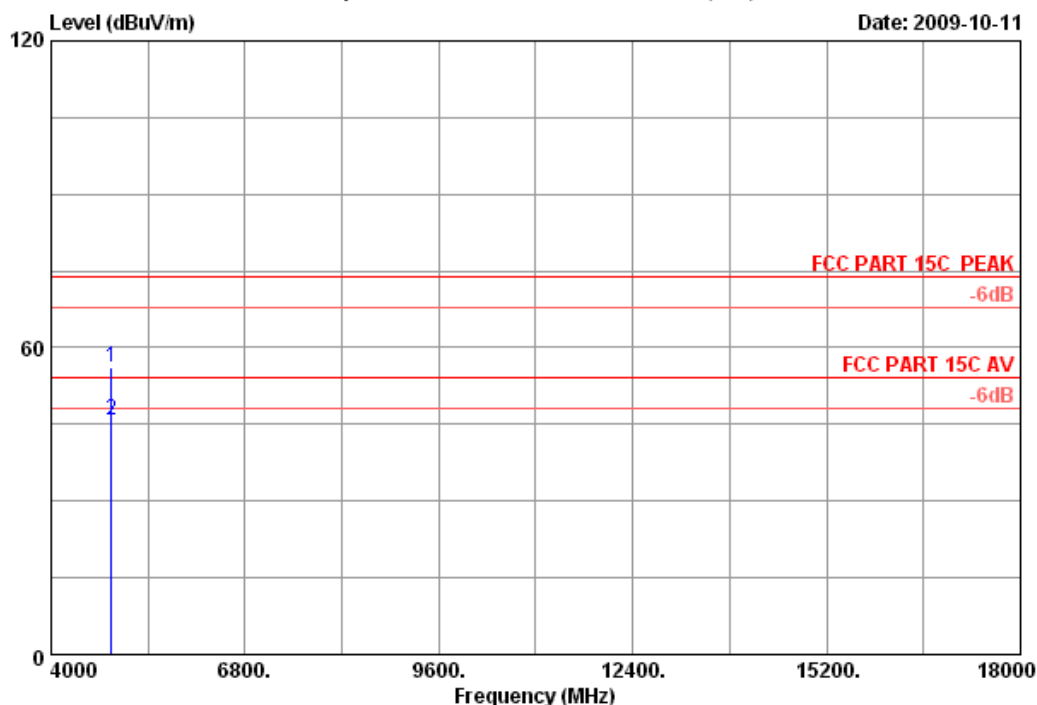

Site no. : 3m Chamber Data no. : 80  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11n HT20 CH6 2437MHz  
M/N : TL-WN722N

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dbuv)	(dBuV/m)	(dBuV/m)	(dB)	
1	4874.000	34.78	12.23	35.36	44.66	56.31	74.00	17.69	Peak
2	4874.000	34.78	12.23	35.36	34.28	45.93	54.00	8.07	Average


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 81 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

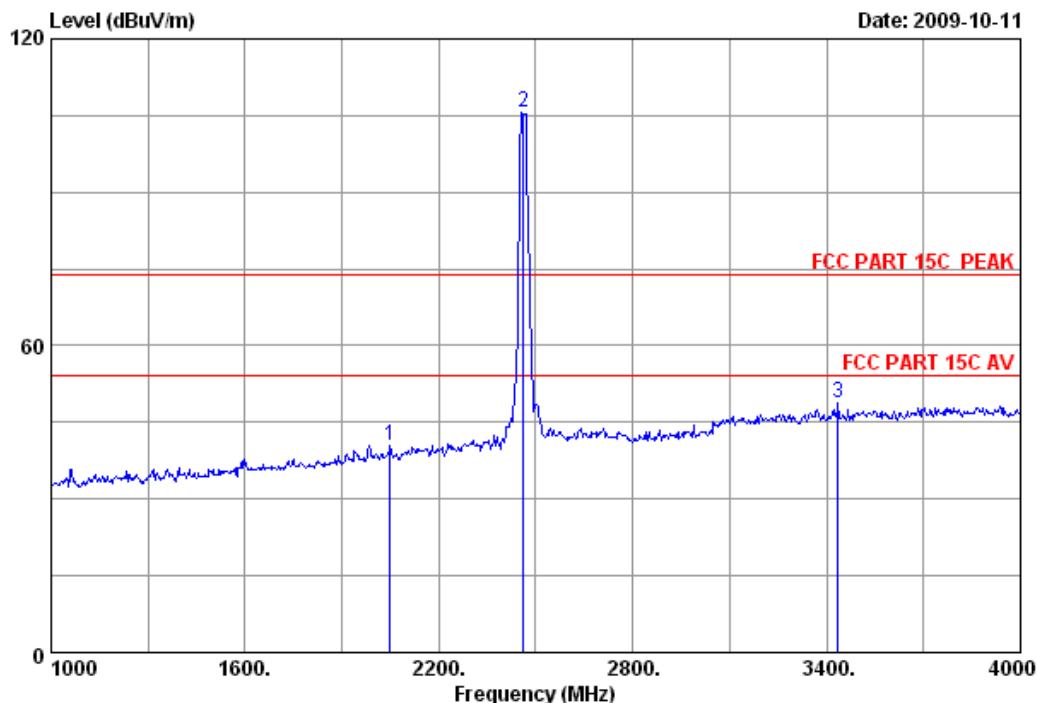

Site no. : 3m Chamber Data no. : 81  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11n HT20 CH11 2462MHz  
M/N : TL-WN722N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dbuv)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2050.000	27.97	7.97	36.06	40.64	40.52	74.00	33.48	Peak
2	2462.000	28.55	8.76	36.02	104.31	105.60	74.00	-31.60	Peak
3	3436.000	31.41	10.48	35.75	42.70	48.84	74.00	25.16	Peak


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 82 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

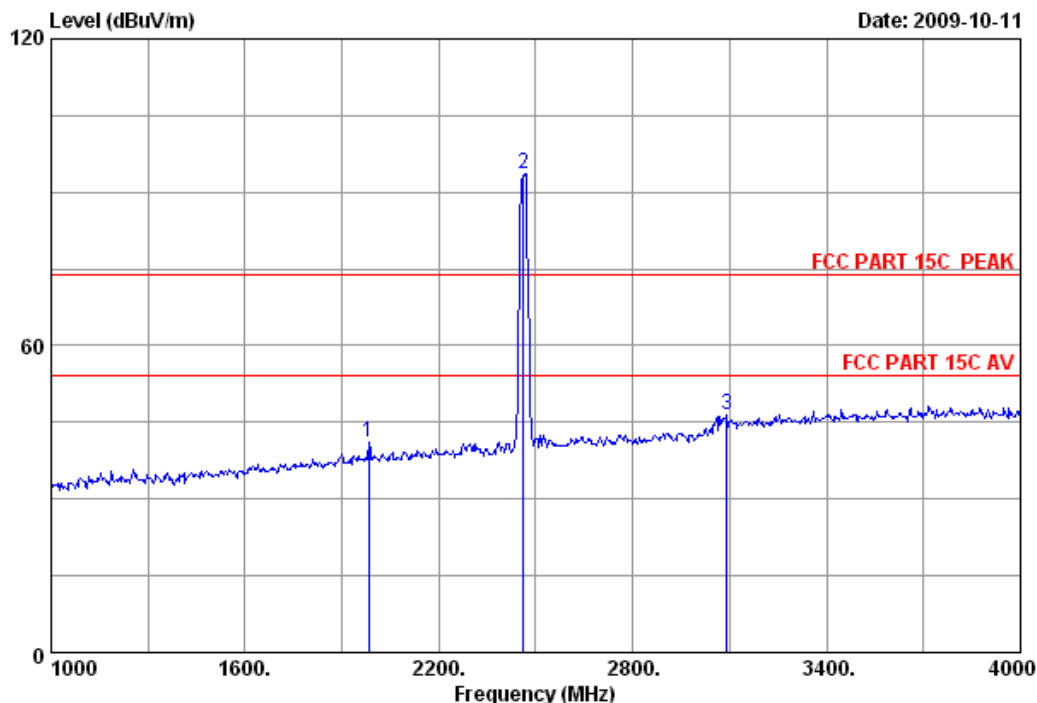

Site no. : 3m Chamber Data no. : 82  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11n HT20 CH11 2462MHz  
M/N : TL-WN722N

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dbuv)	(dBuV/m)	(dBuV/m)	(dB)	
1	1984.000	27.83	7.76	36.06	41.60	41.13	74.00	32.87	Peak
2	2462.000	28.55	8.76	36.02	92.21	93.50	74.00	-19.50	Peak
3	3091.000	30.44	9.97	35.71	41.83	46.53	74.00	27.47	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 83

File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

Date: 2009-10-11

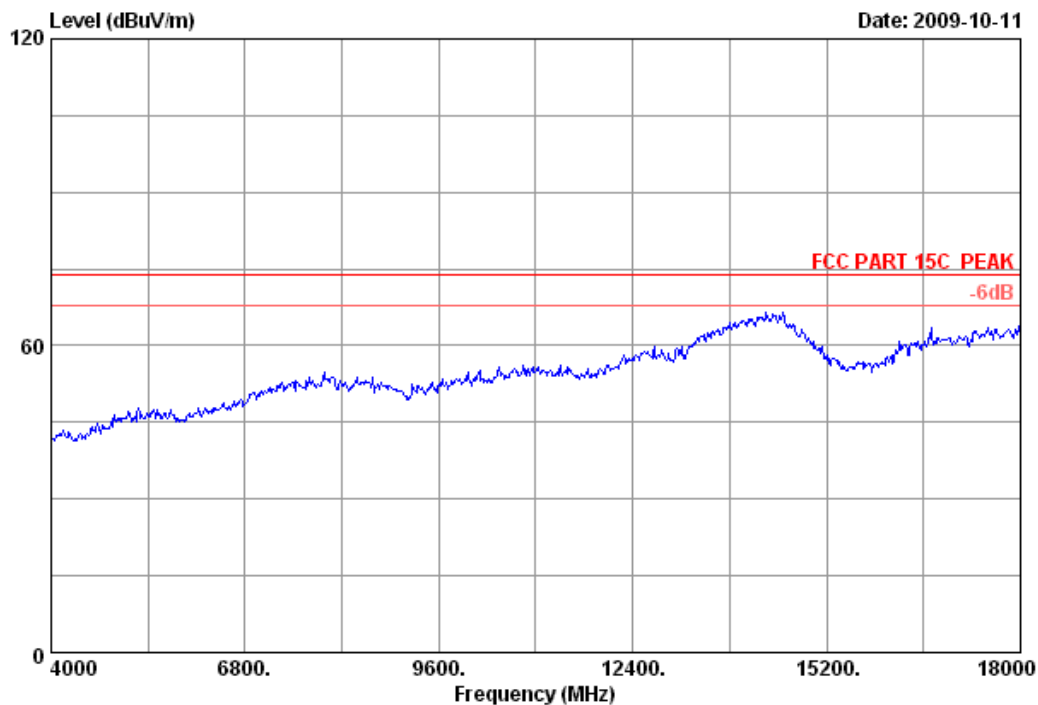


Site no.	: 3m Chamber	Data no.	: 83
Dis. / Ant.	: 3m 3115(0905)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless High Gain USB Adapter		
Power	: DC 5V From PC Input AC 120V/60Hz		
Test mode	: IEEE802.11n HT20 CH11 2462MHz		
M/N	: TL-WN722N		



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 84 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

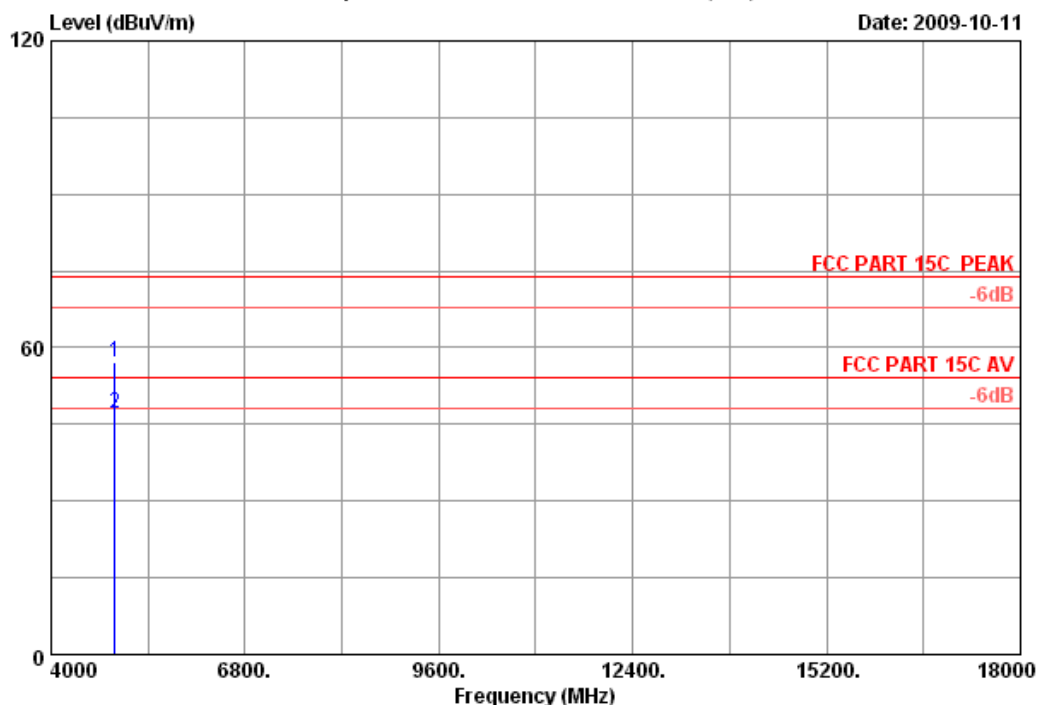

Site no. : 3m Chamber Data no. : 84  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11n HT20 CH11 2462MHz  
M/N : TL-WN722N

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dbuv)	(dBuV/m)	(dBuV/m)	(dB)	
1	4924.000	35.09	12.58	35.34	44.68	57.01	74.00	16.99	Peak
2	4924.000	35.09	12.58	35.34	34.64	46.97	54.00	7.03	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.






No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 85

File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

Date: 2009-10-11

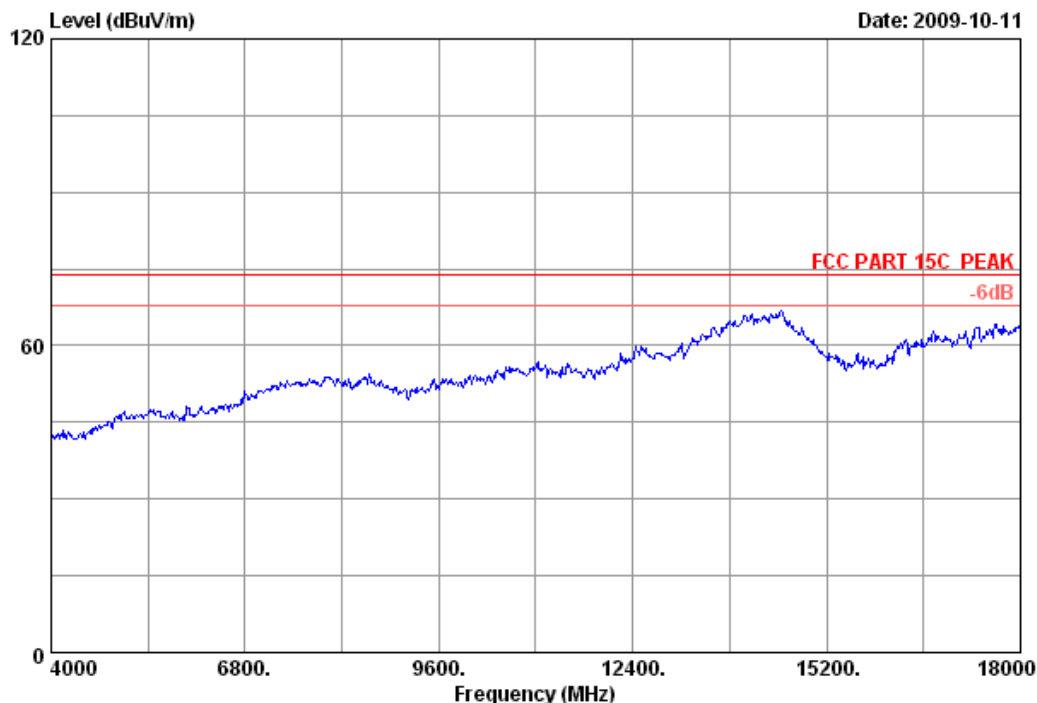


Site no.	: 3m Chamber	Data no.	: 85
Dis. / Ant.	: 3m 3115(0905)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless High Gain USB Adapter		
Power	: DC 5V From PC Input AC 120V/60Hz		
Test mode	: IEEE802.11n HT20 CH11 2462MHz		
M/N	: TL-WN722N		



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 86 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

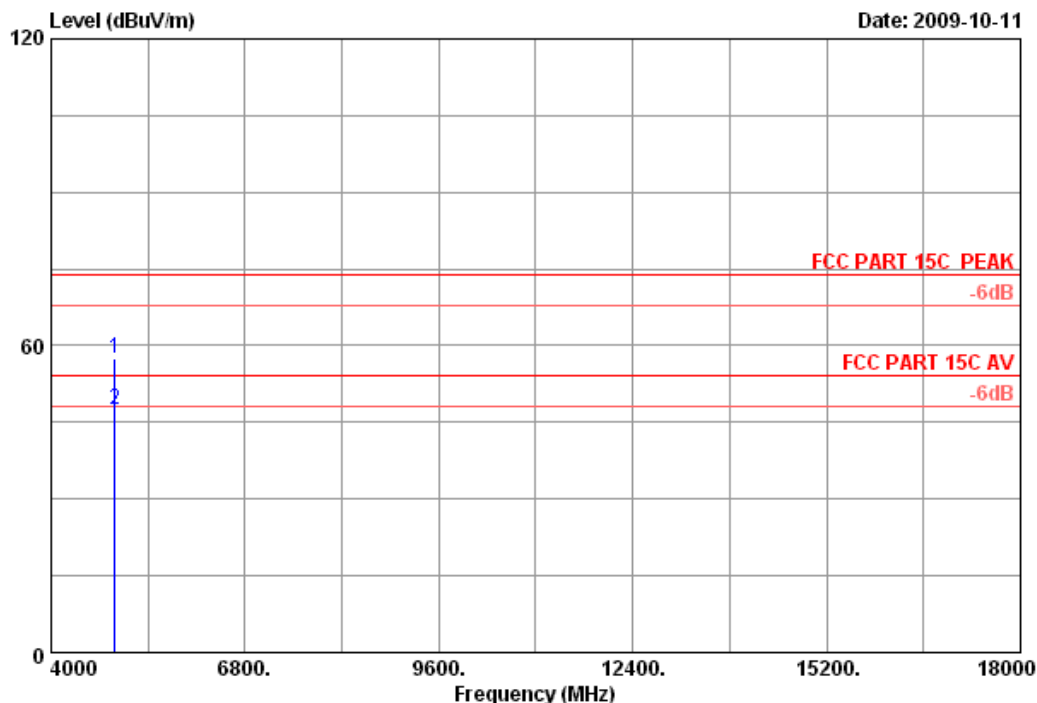

Site no. : 3m Chamber Data no. : 86  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11n HT20 CH11 2462MHz  
M/N : TL-WN722N

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dbuv)	(dBuV/m)	(dBuV/m)	(dB)	
1	4924.000	35.09	12.58	35.34	45.21	57.54	74.00	16.46	Peak
2	4924.000	35.09	12.58	35.34	35.24	47.57	54.00	6.43	Average


Remarks:

- Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
- The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 87 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

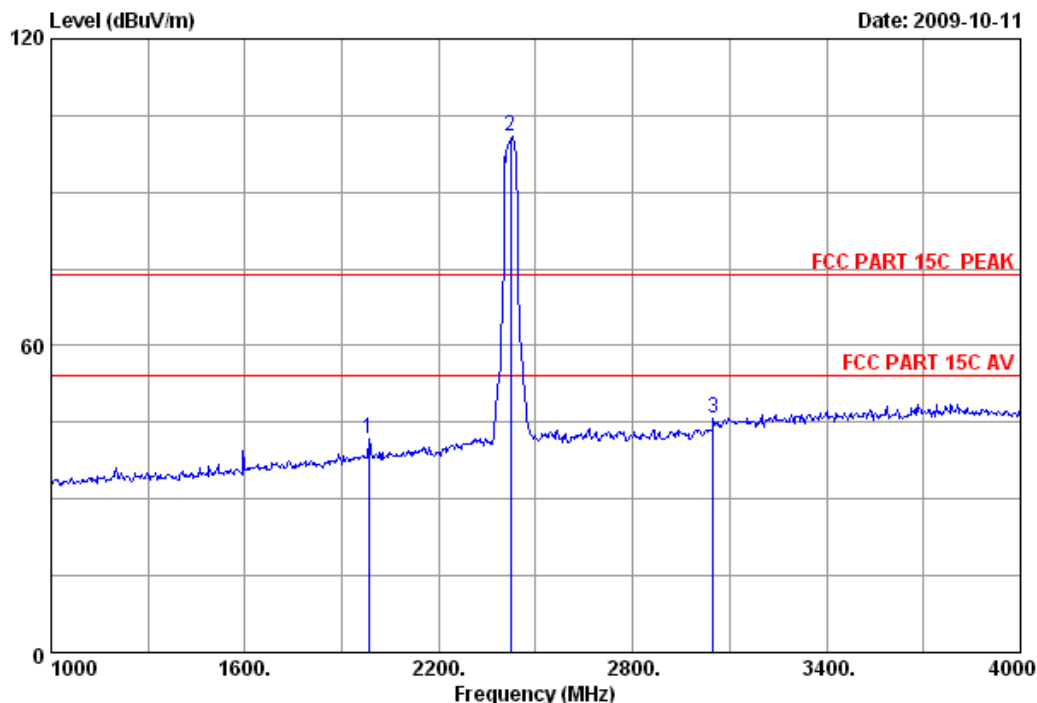

Site no. : 3m Chamber Data no. : 87  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11n HT40 CH1 2422MHz  
M/N : TL-WN722N

	Freq.	Ant.	Cable	Amp.		Emission			
	(MHz)	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dbuv)	(dBuV/m)	(dBuV/m)	(dB)	
1	1984.000	27.83	7.76	36.06	42.22	41.75	74.00	32.25	Peak
2	2422.000	28.50	8.60	36.01	99.80	100.89	74.00	-26.89	Peak
3	3049.000	30.34	9.82	35.84	41.63	45.95	74.00	28.05	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 88

File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

Date: 2009-10-11

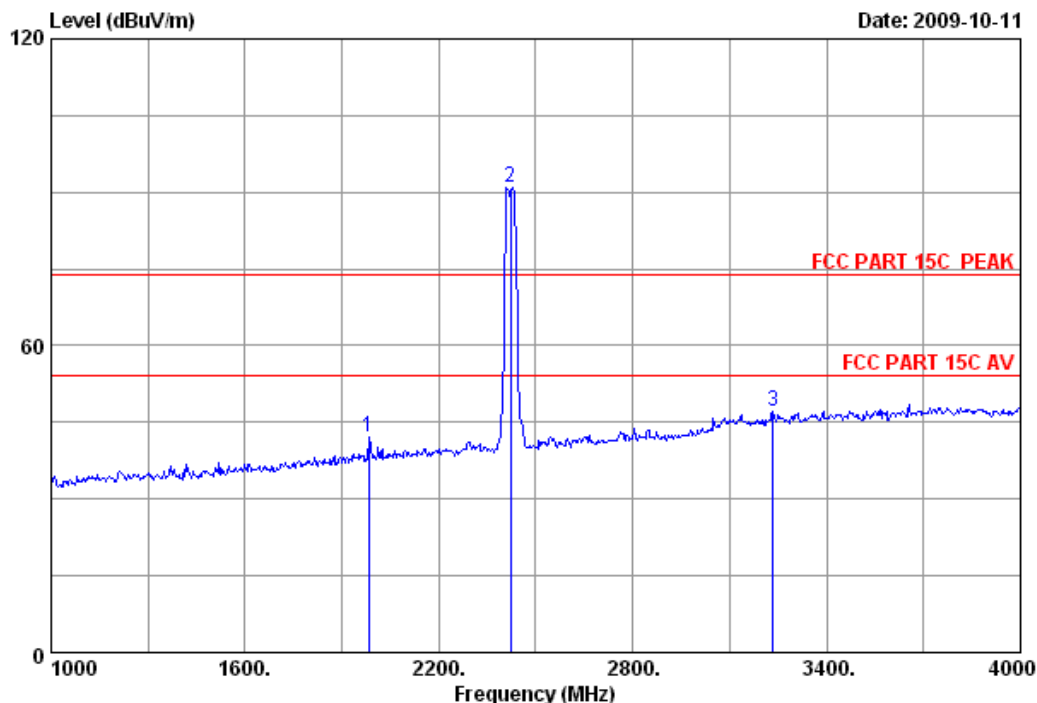

Site no. : 3m Chamber Data no. : 88  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11n HT40 CH1 2422MHz  
M/N : TL-WN722N

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dbuv)	(dBuV/m)	(dBuV/m)	(dB)	
1	1984.000	27.83	7.76	36.06	42.49	42.02	74.00	31.98	Peak
2	2422.000	28.50	8.60	36.01	89.76	90.85	74.00	-16.85	Peak
3	3235.000	30.83	10.04	35.77	41.94	47.04	74.00	26.96	Peak

## Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 89

File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

Date: 2009-10-11

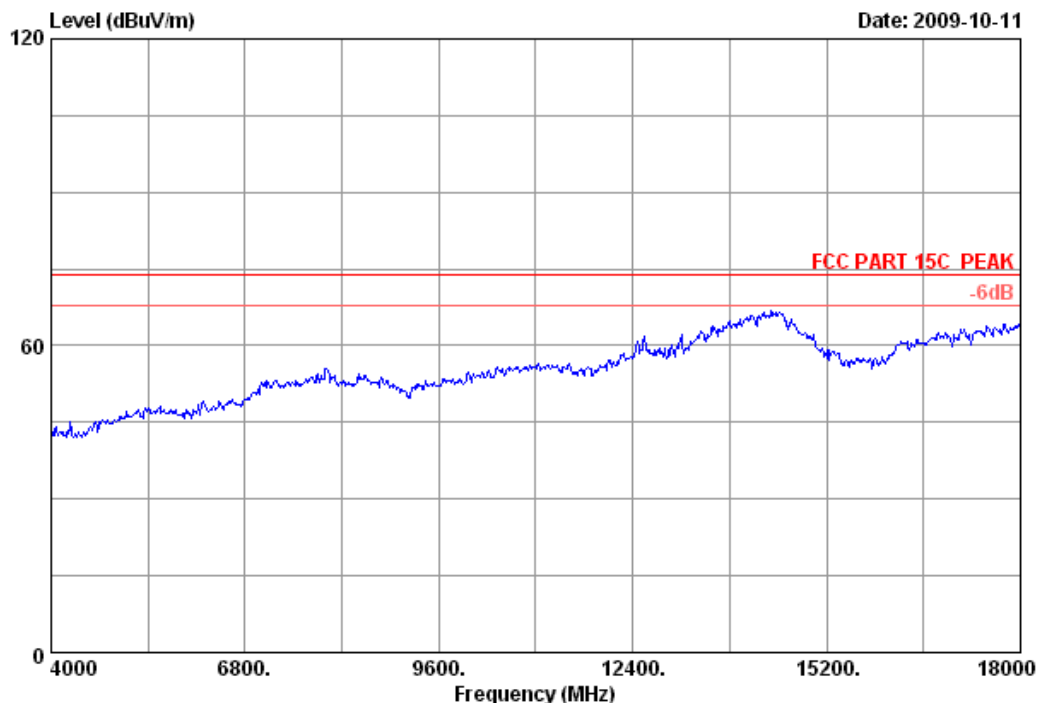

Site no.	: 3m Chamber	Data no.	: 89
Dis. / Ant.	: 3m 3115(0905)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless High Gain USB Adapter		
Power	: DC 5V From PC Input AC 120V/60Hz		
Test mode	: IEEE802.11n HT40 CH1 2422MHz		
M/N	: TL-WN722N		




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 90

File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

Date: 2009-10-11

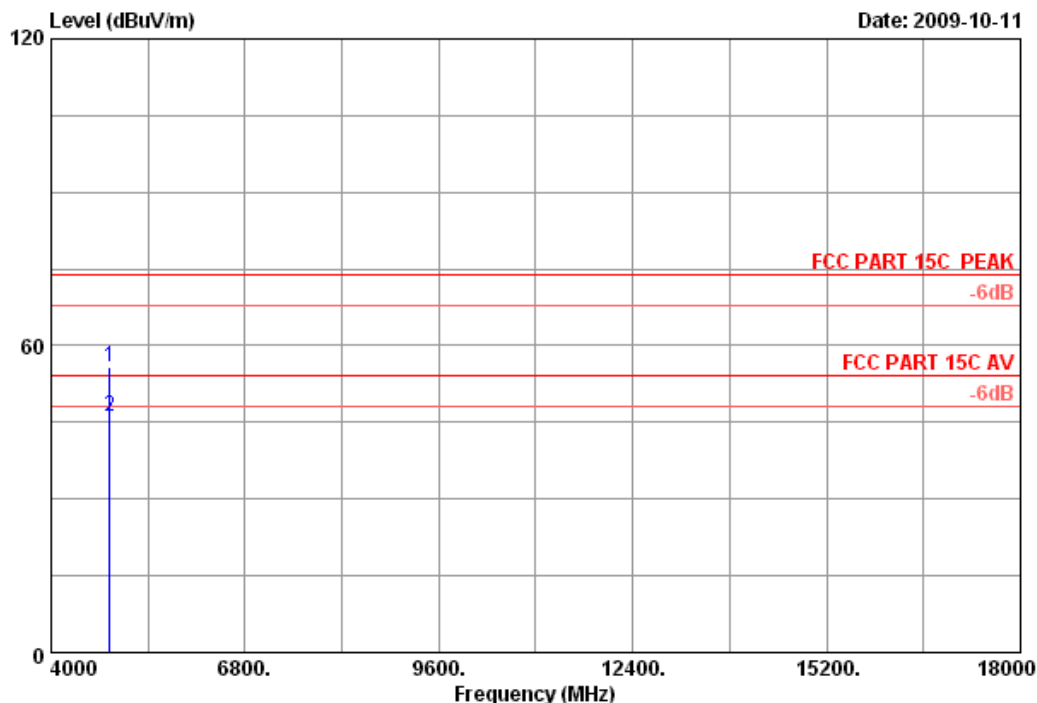

Site no. : 3m Chamber Data no. : 90  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11n HT40 CH1 2422MHz  
M/N : TL-WN722N

	Freq.	Ant.	Cable	Amp.		Emission			
	(MHz)	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dbuv)	(dBuV/m)	(dBuV/m)	(dB)	
1	4844.000	34.57	12.45	35.25	43.98	55.75	74.00	18.25	Peak
2	4844.000	34.57	12.45	35.25	34.27	46.04	54.00	7.96	Average

## Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 91

File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

Date: 2009-10-11

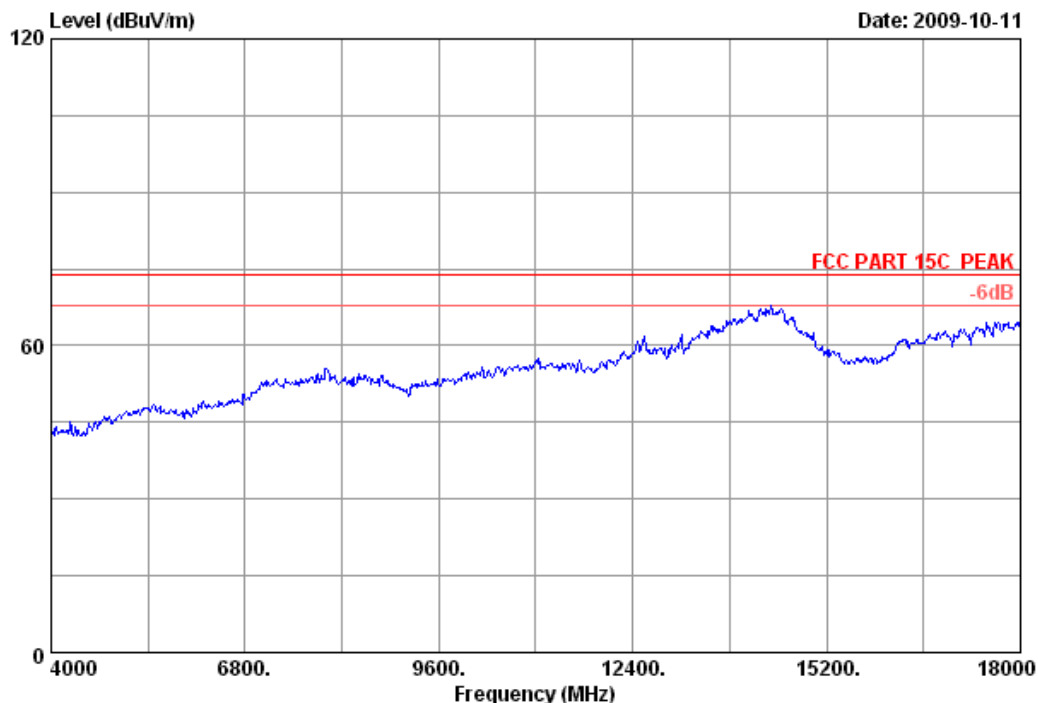


Site no.	: 3m Chamber	Data no.	: 91
Dis. / Ant.	: 3m 3115(0905)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless High Gain USB Adapter		
Power	: DC 5V From PC Input AC 120V/60Hz		
Test mode	: IEEE802.11n HT40 CH1 2422MHz		
M/N	: TL-WN722N		



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 92 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

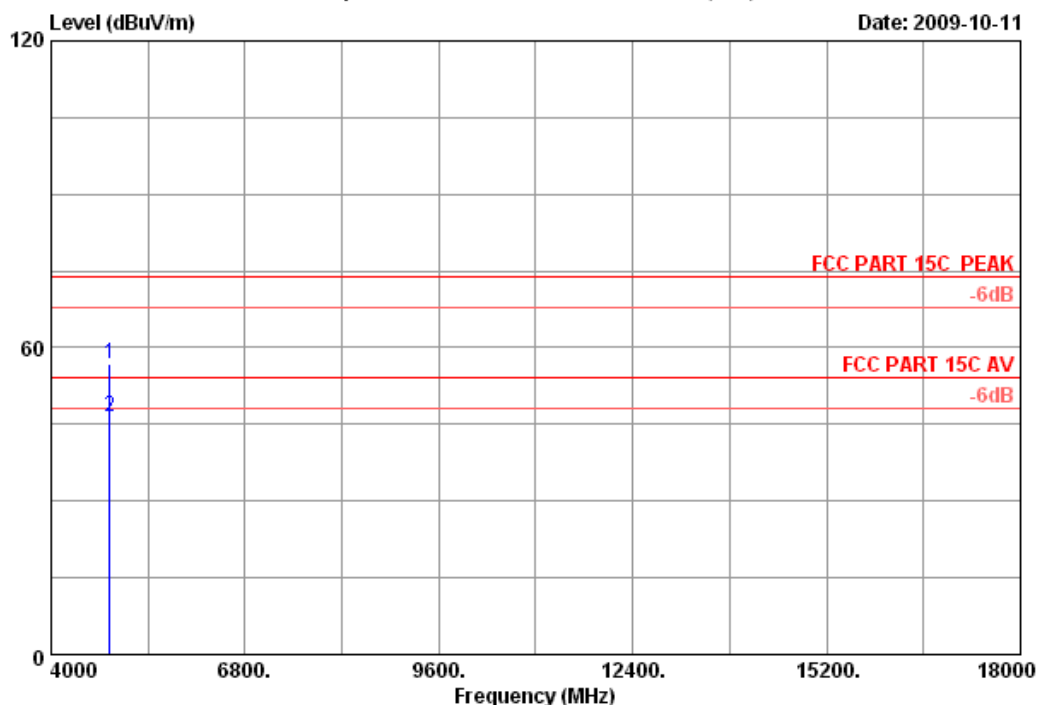

Site no. : 3m Chamber Data no. : 92  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11n HT40 CH1 2422MHz  
M/N : TL-WN722N

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dbuv)	(dBuV/m)	(dBuV/m)	(dB)	
1	4844.000	34.57	12.45	35.25	44.95	56.72	74.00	17.28	Peak
2	4844.000	34.57	12.45	35.25	34.61	46.38	54.00	7.62	Average

Remarks:

- Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
- The emission levels that are 20dB below the official limit are not reported.






No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 93

File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

Date: 2009-10-11

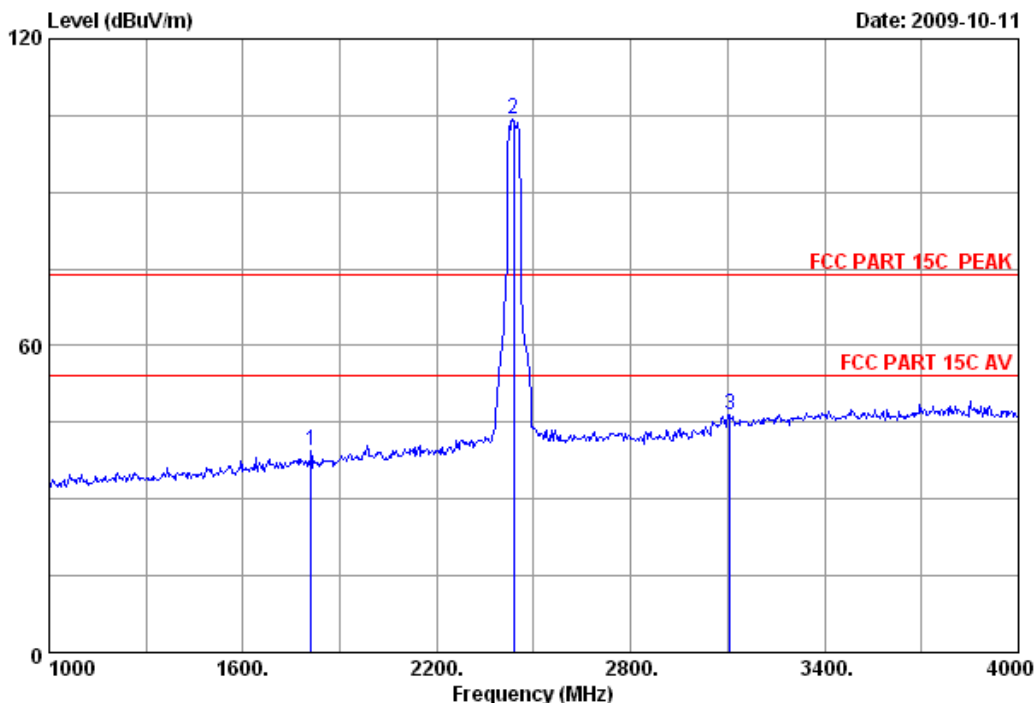

Site no. : 3m Chamber Data no. : 93  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11n HT40 CH4 2437MHz  
M/N : TL-WN722N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dbuv)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	1810.000	27.17	7.46	36.34	41.11	39.40	74.00	34.60	Peak
2	2437.000	28.53	8.60	36.06	103.13	104.20	74.00	-30.20	Peak
3	3106.000	30.49	9.98	35.73	41.69	46.43	74.00	27.57	Peak

## Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 94

File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

Date: 2009-10-11

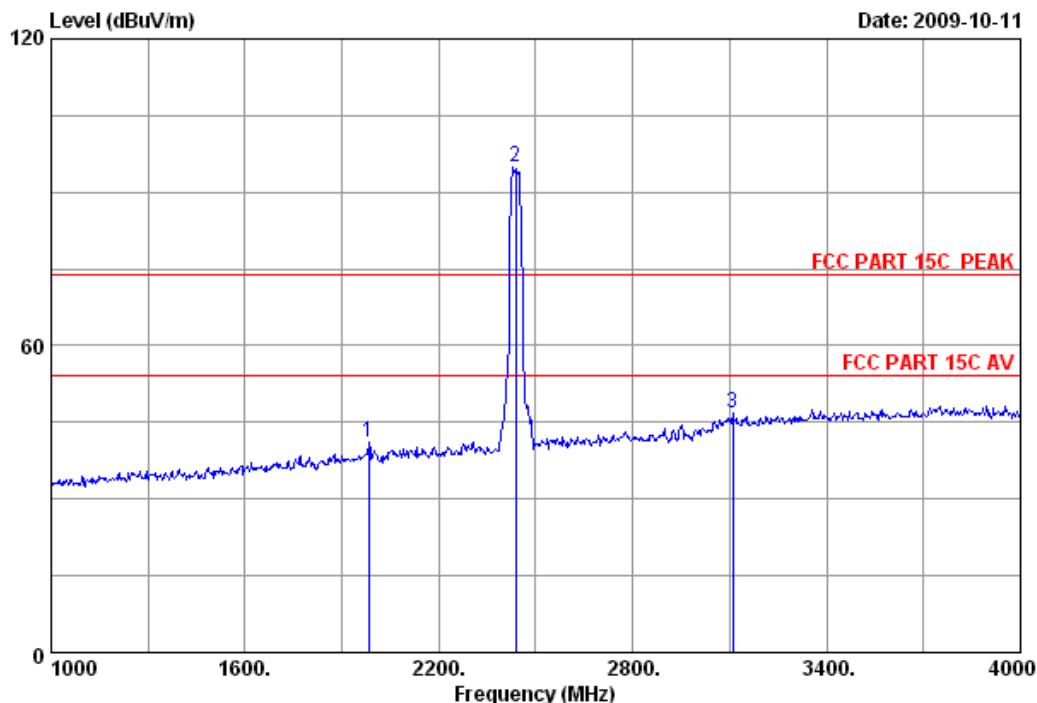

Site no. : 3m Chamber Data no. : 94  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11n HT40 CH4 2437MHz  
M/N : TL-WN722N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dbuv)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1984.000	27.83	7.76	36.06	41.70	41.23	74.00	32.77	Peak
2	2437.000	28.53	8.60	36.06	93.76	94.83	74.00	-20.83	Peak
3	3109.000	30.49	9.98	35.73	41.95	46.69	74.00	27.31	Peak

## Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 95

File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

Date: 2009-10-11

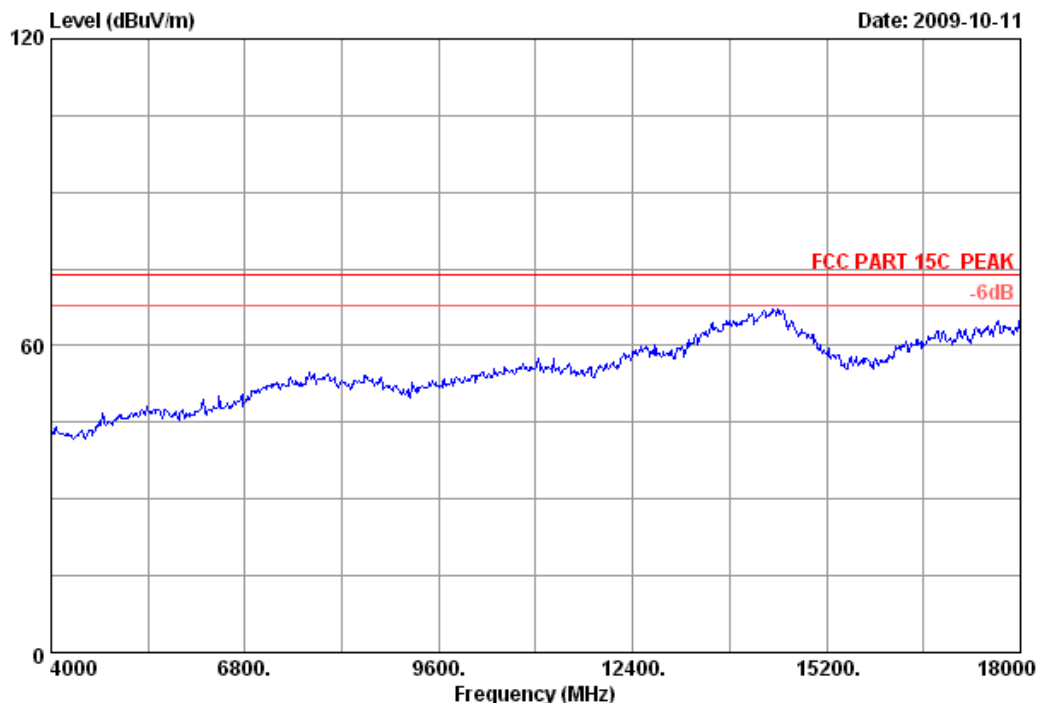

Site no.	: 3m Chamber	Data no.	: 95
Dis. / Ant.	: 3m 3115(0905)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless High Gain USB Adapter		
Power	: DC 5V From PC Input AC 120V/60Hz		
Test mode	: IEEE802.11n HT40 CH4 2437MHz		
M/N	: TL-WN722N		




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 96

File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

Date: 2009-10-11

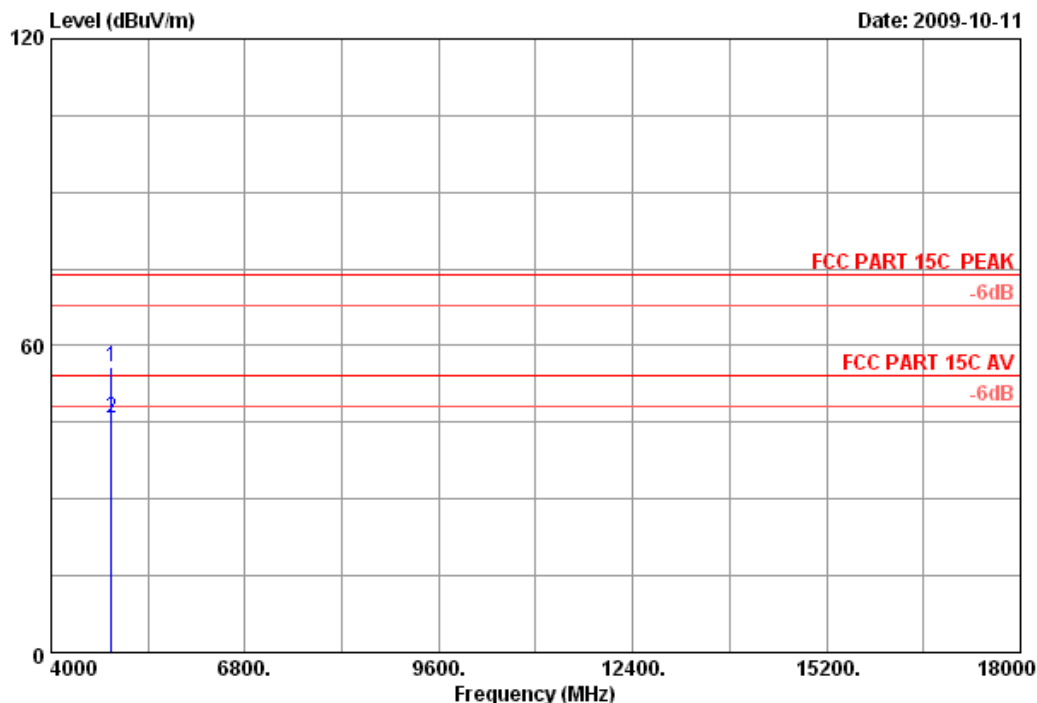

Site no. : 3m Chamber Data no. : 96  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11n HT40 CH4 2437MHz  
M/N : TL-WN722N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dbuv)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	4874.000	34.78	12.23	35.36	44.01	55.66	74.00	18.34	Peak
2	4874.000	34.78	12.23	35.36	34.04	45.69	54.00	8.31	Average

## Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 97

File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

Date: 2009-10-11

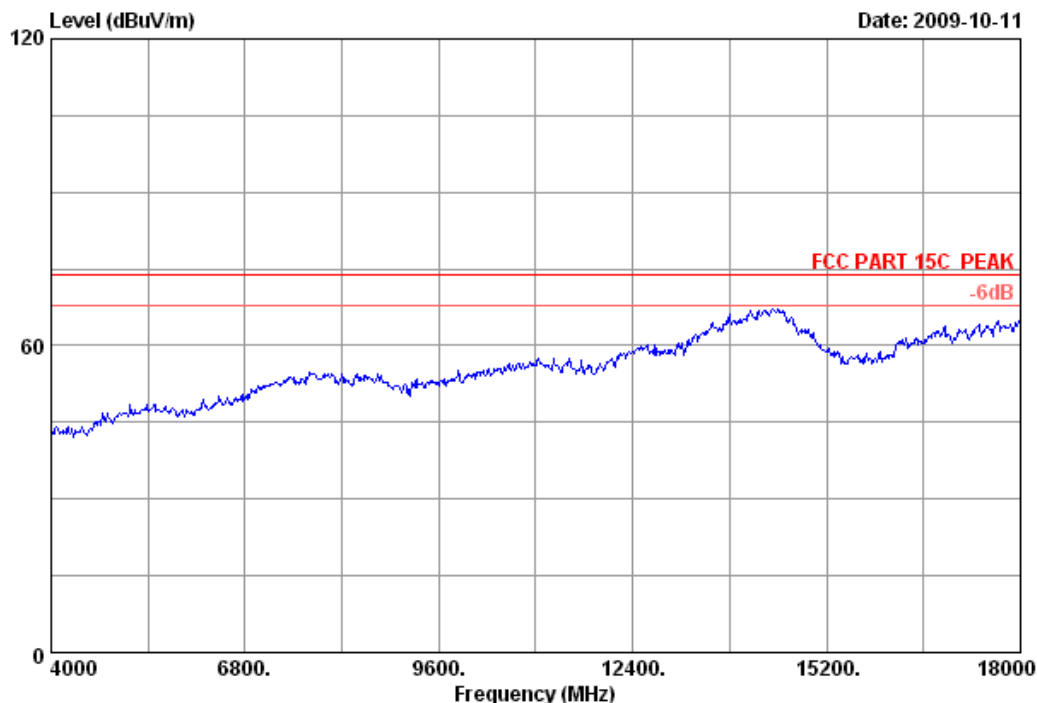


Site no.	: 3m Chamber	Data no.	: 97
Dis. / Ant.	: 3m 3115(0905)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless High Gain USB Adapter		
Power	: DC 5V From PC Input AC 120V/60Hz		
Test mode	: IEEE802.11n HT40 CH4 2437MHz		
M/N	: TL-WN722N		



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 98 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

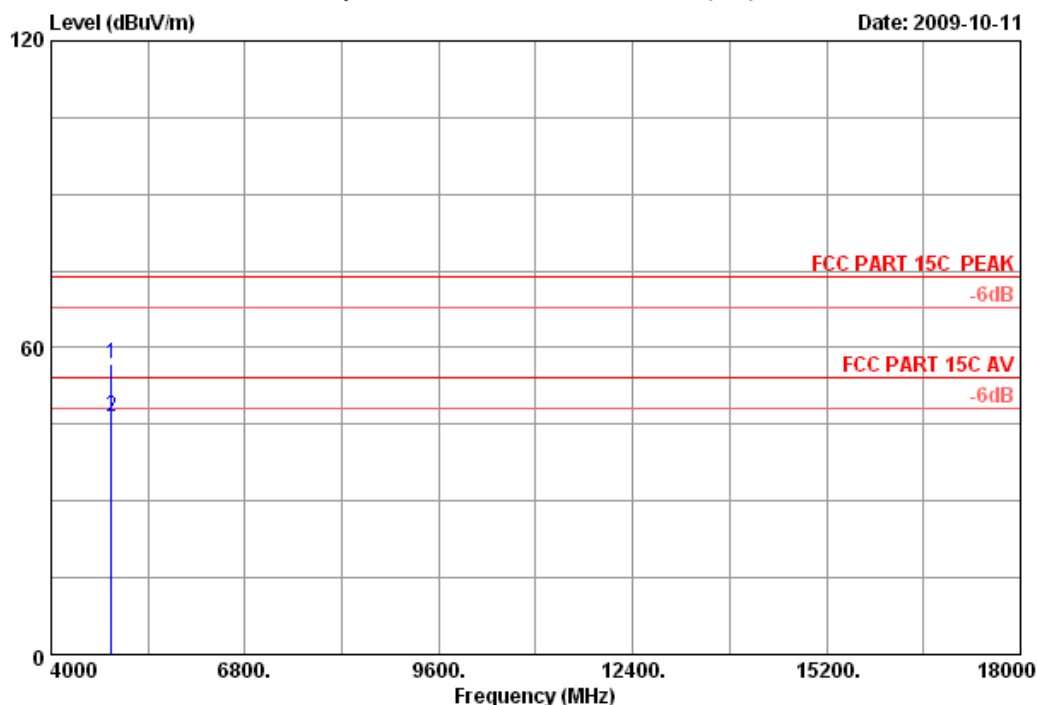

Site no. : 3m Chamber Data no. : 98  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11n HT40 CH4 2437MHz  
M/N : TL-WN722N

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dbuv)	(dBuV/m)	(dBuV/m)	(dB)	
1	4874.000	34.78	12.23	35.36	45.02	56.67	74.00	17.33	Peak
2	4874.000	34.78	12.23	35.36	34.67	46.32	54.00	7.68	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 99

File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

Date: 2009-10-11

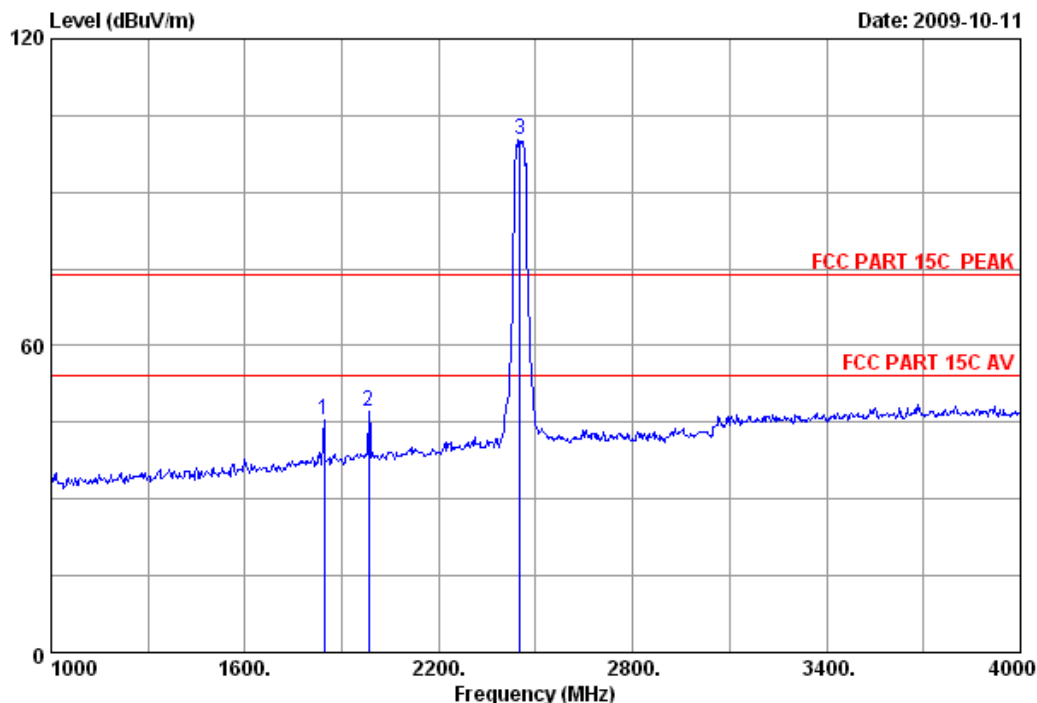

Site no. : 3m Chamber Data no. : 99  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11n HT40 CH7 2452MHz  
M/N : TL-WN722N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dbuv)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1846.000	27.30	7.52	36.23	46.79	45.38	74.00	28.62	Peak
2	1984.000	27.83	7.76	36.06	47.69	47.22	74.00	26.78	Peak
3	2452.000	28.53	8.48	36.06	99.31	100.26	74.00	-26.26	Peak


## Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 100 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

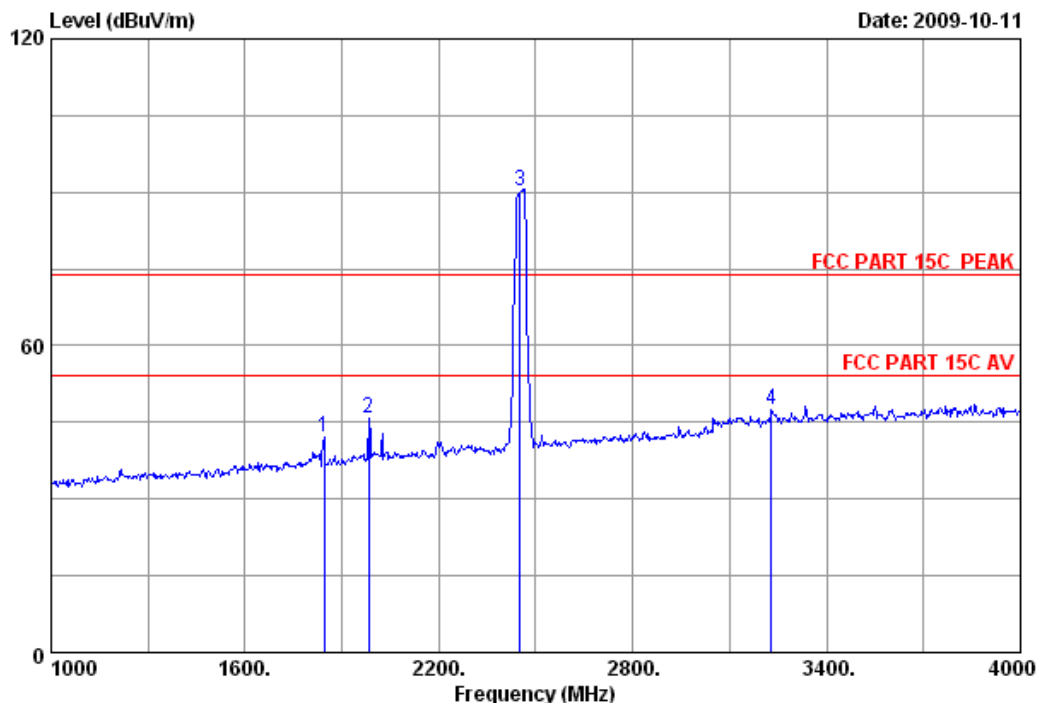

Site no. : 3m Chamber Data no. : 100  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11n HT40 CH7 2452MHz  
M/N : TL-WN722N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dbuv)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1846.000	27.30	7.52	36.23	43.45	42.04	74.00	31.96	Peak
2	1984.000	27.83	7.76	36.06	46.30	45.83	74.00	28.17	Peak
3	2452.000	28.53	8.48	36.06	89.19	90.14	74.00	-16.14	Peak
4	3229.000	30.83	10.04	35.77	42.23	47.33	74.00	26.67	Peak

Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.





No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 101 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

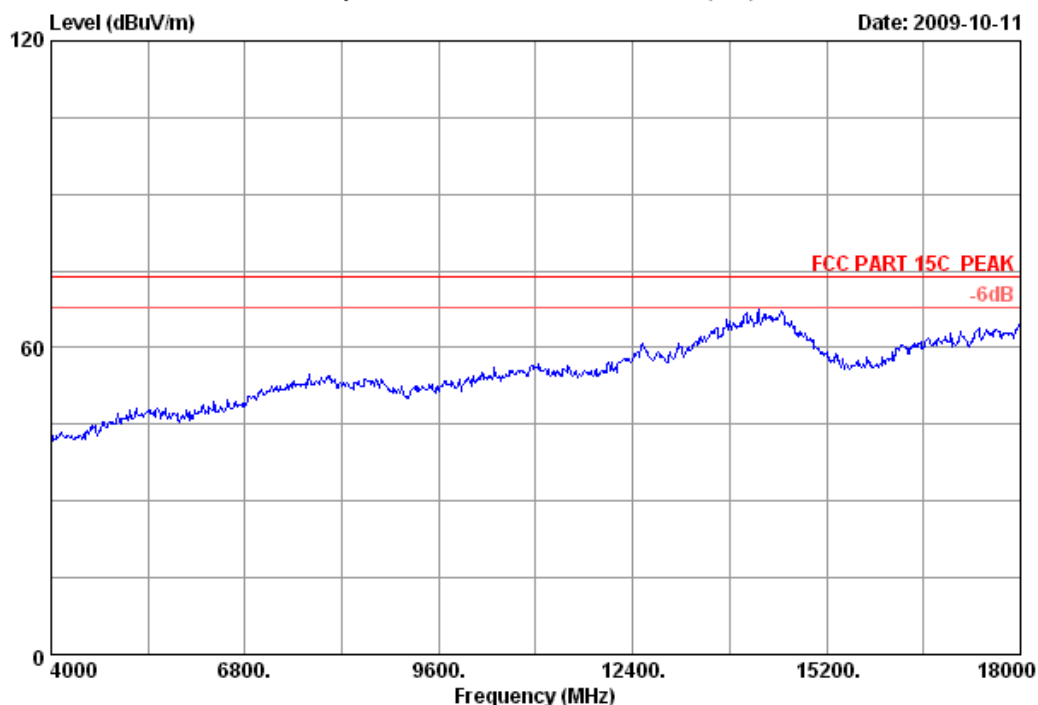


Site no.	: 3m Chamber	Data no.	: 101
Dis. / Ant.	: 3m 3115(0905)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless High Gain USB Adapter		
Power	: DC 5V From PC Input AC 120V/60Hz		
Test mode	: IEEE802.11n HT40 CH7 2452MHz		
M/N	: TL-WN722N		



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 102 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

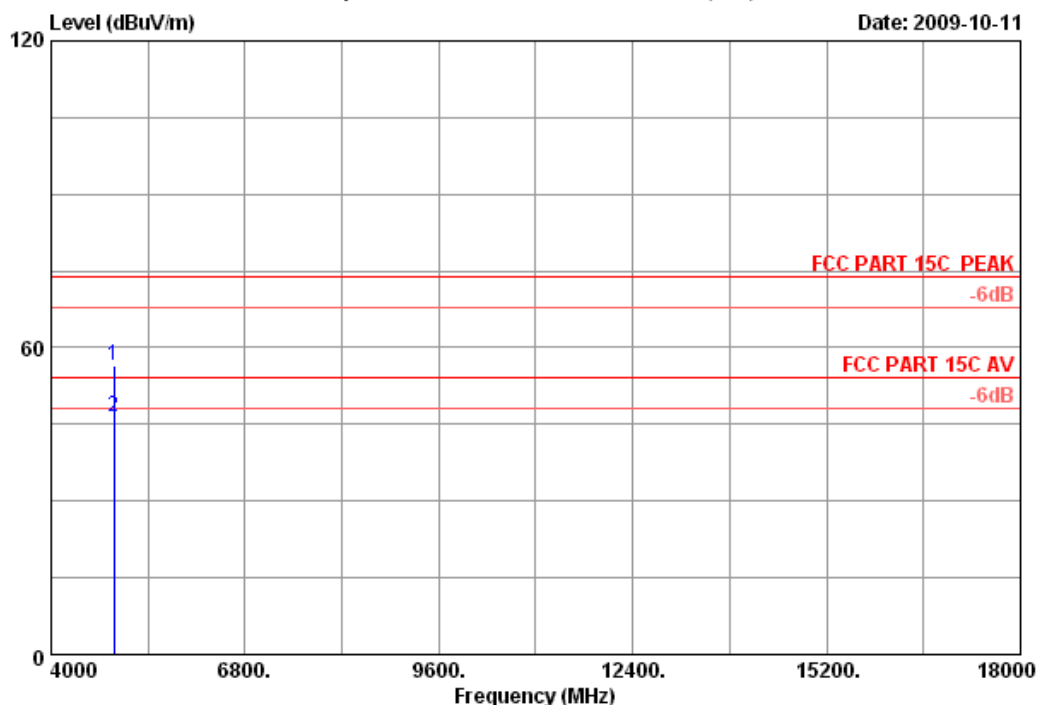

Site no. : 3m Chamber Data no. : 102  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11n HT40 CH7 2452MHz  
M/N : TL-WN722N

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dbuv)	(dBuV/m)	(dBuV/m)	(dB)	
1	4904.000	34.98	12.43	35.27	44.36	56.50	74.00	17.50	Peak
2	4904.000	34.98	12.43	35.27	34.22	46.36	54.00	7.64	Average


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 103 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

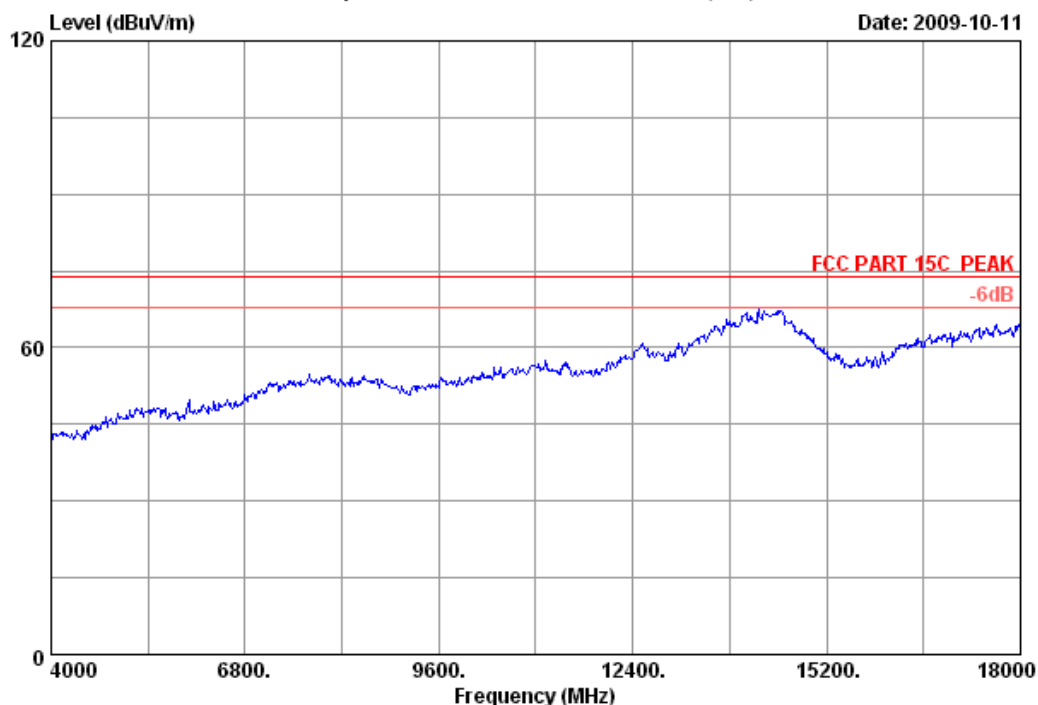


Site no.	: 3m Chamber	Data no.	: 103
Dis. / Ant.	: 3m 3115(0905)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless High Gain USB Adapter		
Power	: DC 5V From PC Input AC 120V/60Hz		
Test mode	: IEEE802.11n HT40 CH7 2452MHz		
M/N	: TL-WN722N		



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 104 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

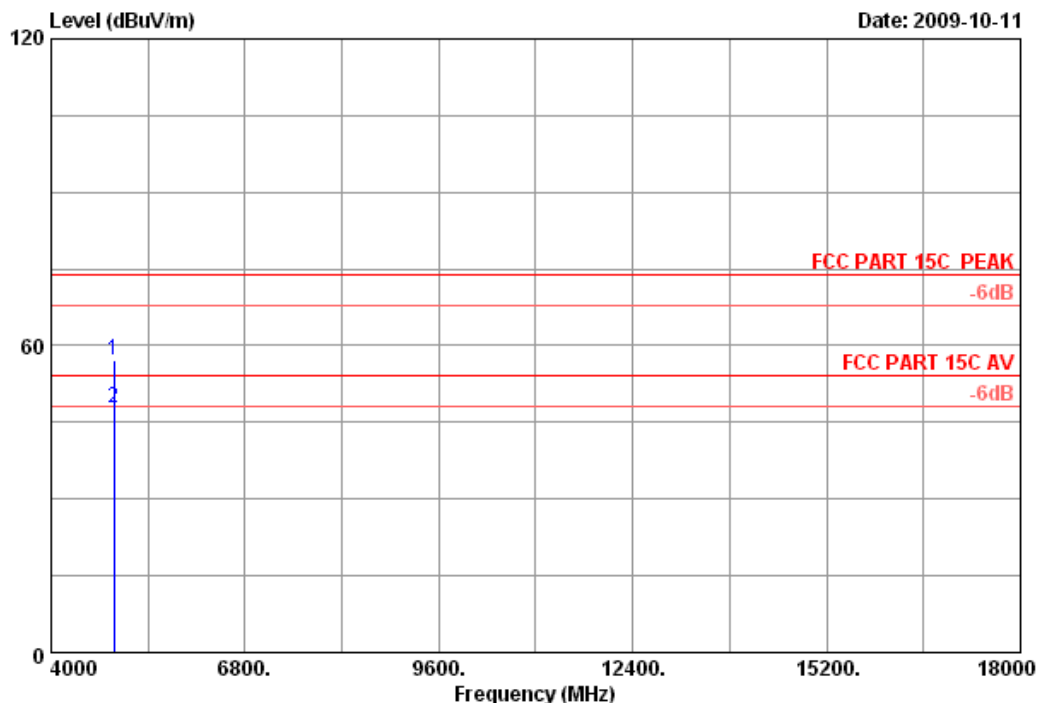

Site no. : 3m Chamber Data no. : 104  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11n HT40 CH7 2452MHz  
M/N : TL-WN722N

	Freq.	Ant.	Cable	Amp.		Emission			
	(MHz)	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dbuv)	(dBuV/m)	(dBuV/m)	(dB)	
1	4904.000	34.98	12.43	35.27	45.13	57.27	74.00	16.73	Peak
2	4904.000	34.98	12.43	35.27	35.69	47.83	54.00	6.17	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

## 5. CONDUCTED SPURIOUS EMISSIONS

### 5.1.Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	E4446A	US44300459	May.08, 09	1 Year
2.	Attenuator	Agilent	8491B	MY39262165	May.08, 09	1 Year
3.	RF Cable	Hubersuhner	SUCOFLEX 102	28618/2	May.08, 09	1 Year

### 5.2.Limit

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

### 5.3.Test Procedure

The transmitter output was connected to a spectrum analyzer, The resolution bandwidth is set to 100 kHz, The video bandwidth is set to 300 kHz.



### 5.4.Test result

**PASS** (The testing data was attached in the next pages.)


**Conducted emission test data:**

Test Mode: IEEE 802.11b TX



Test CH1: 2412MHz

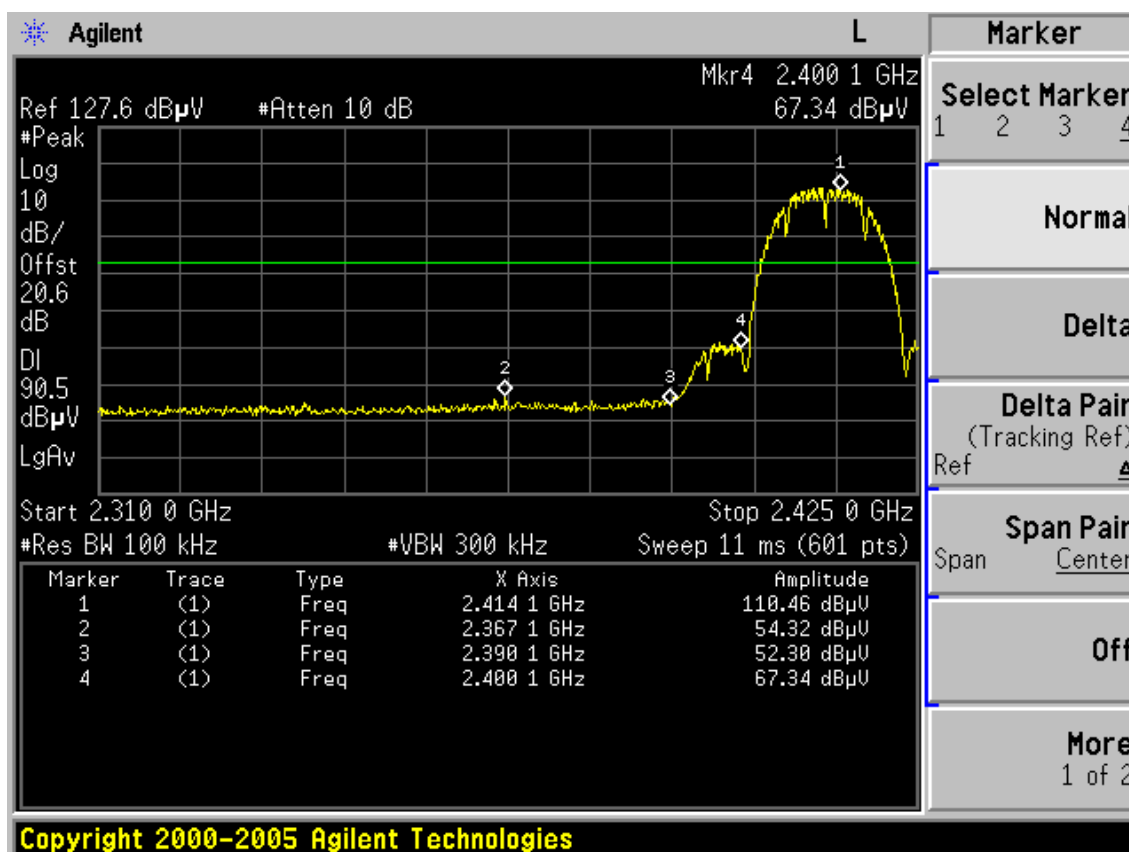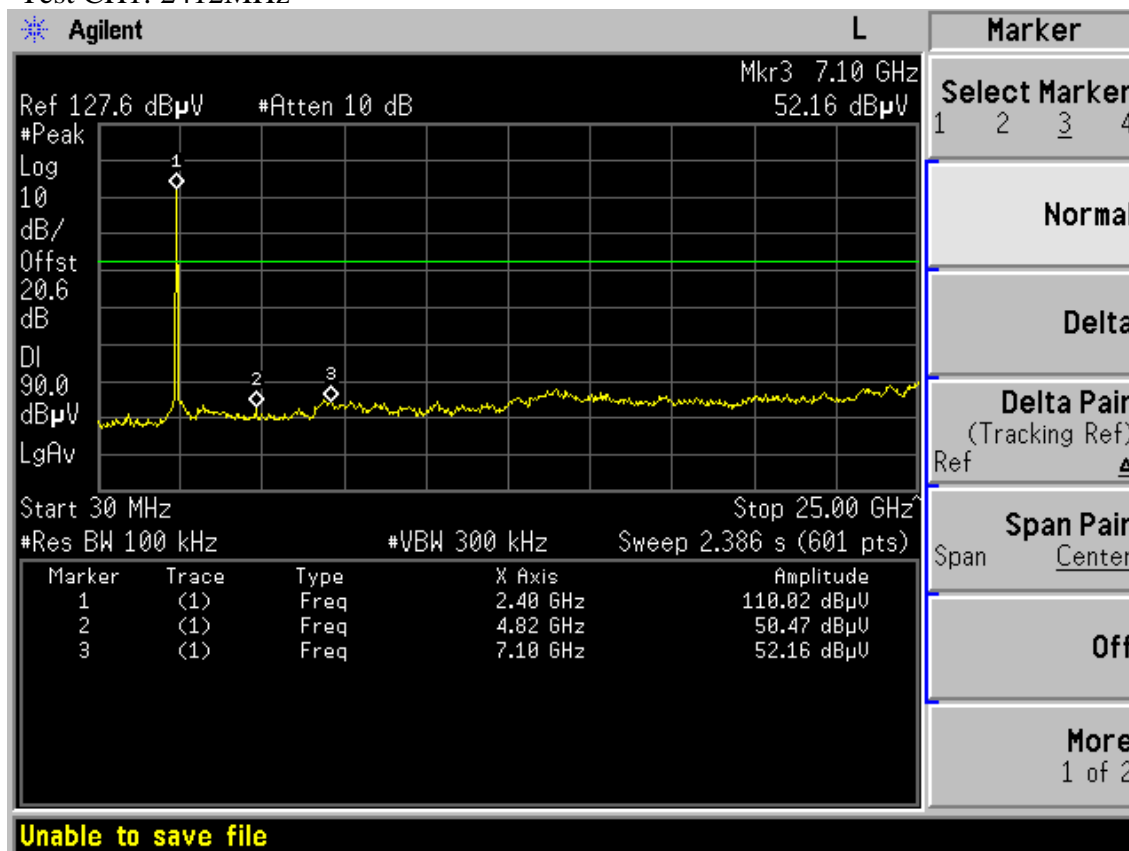

Test CH6: 2437MHz

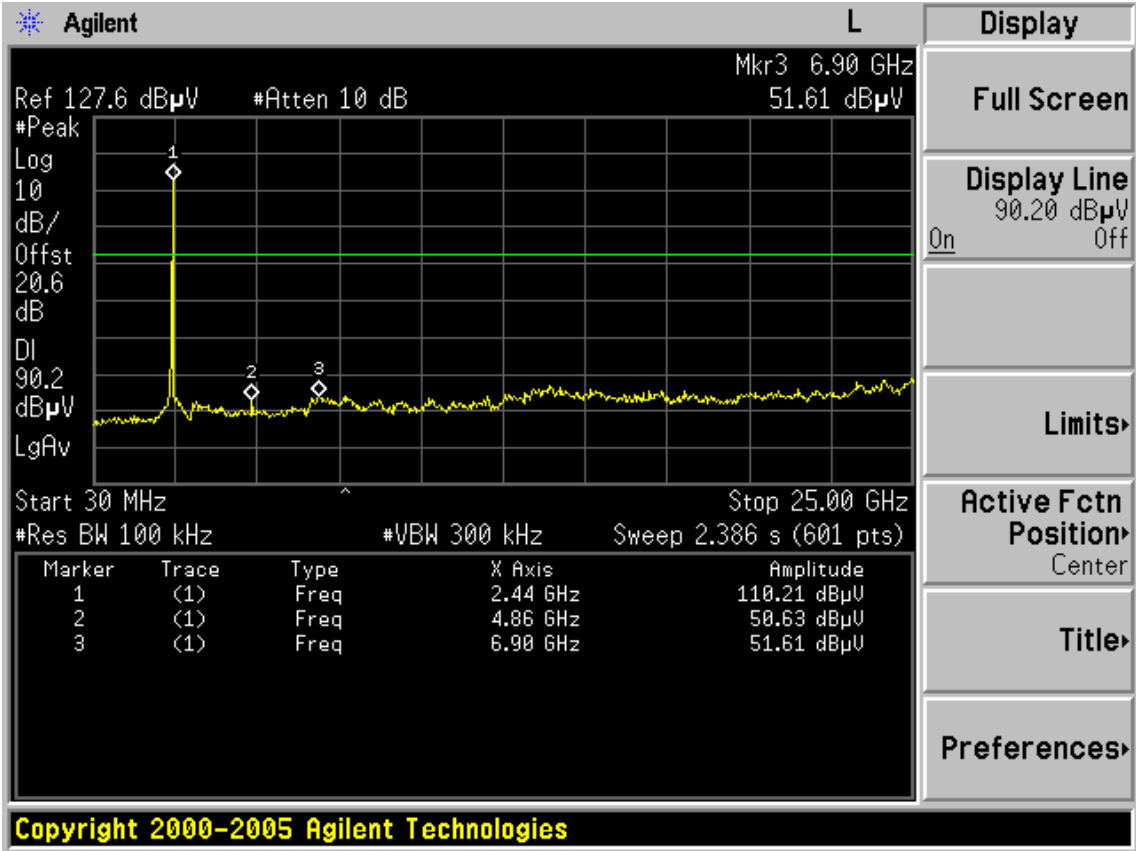



Test CH11: 2462MHz

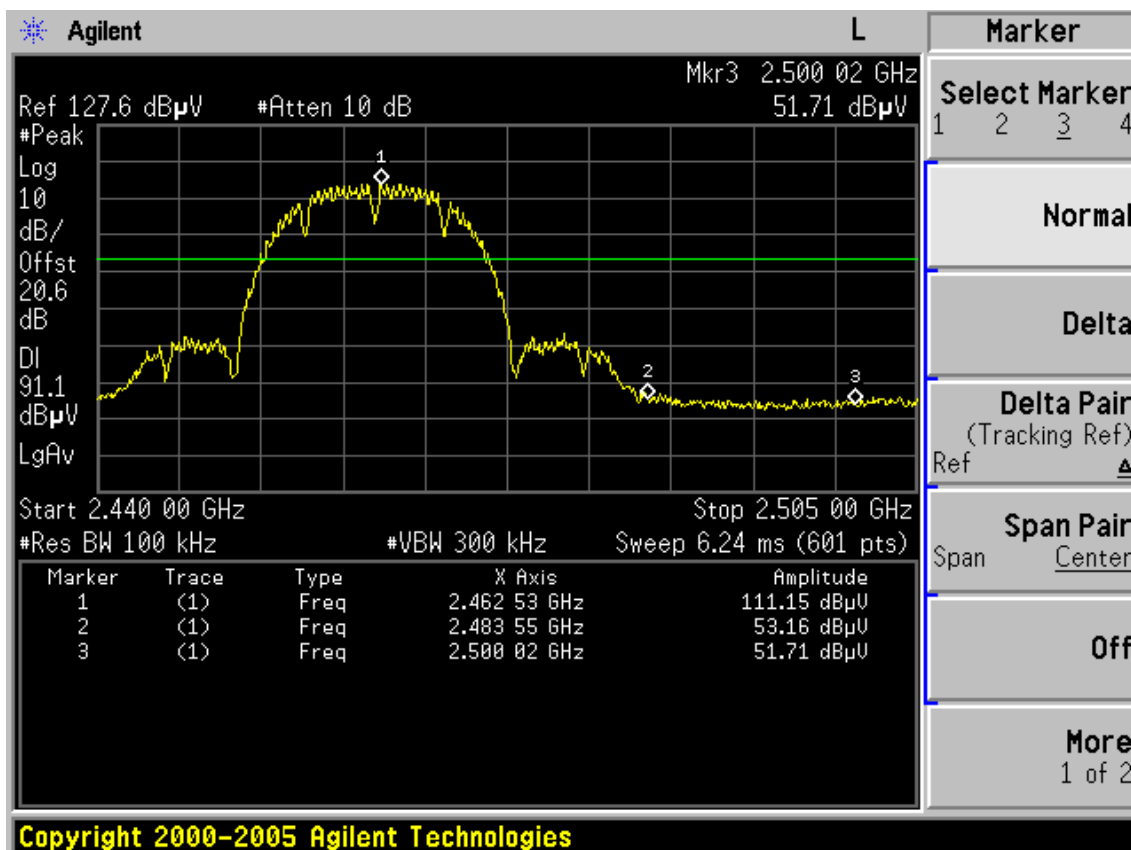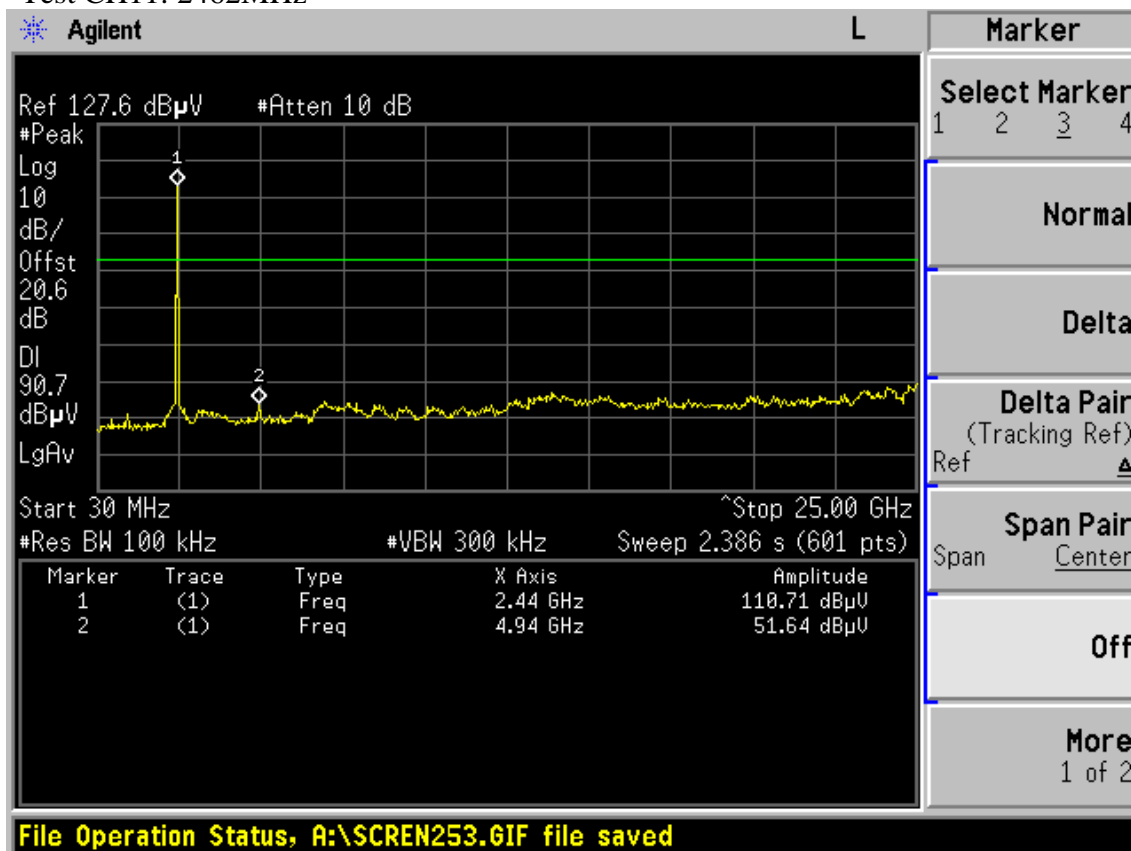




Test Mode: IEEE 802.11g TX



Test CH1: 2412MHz

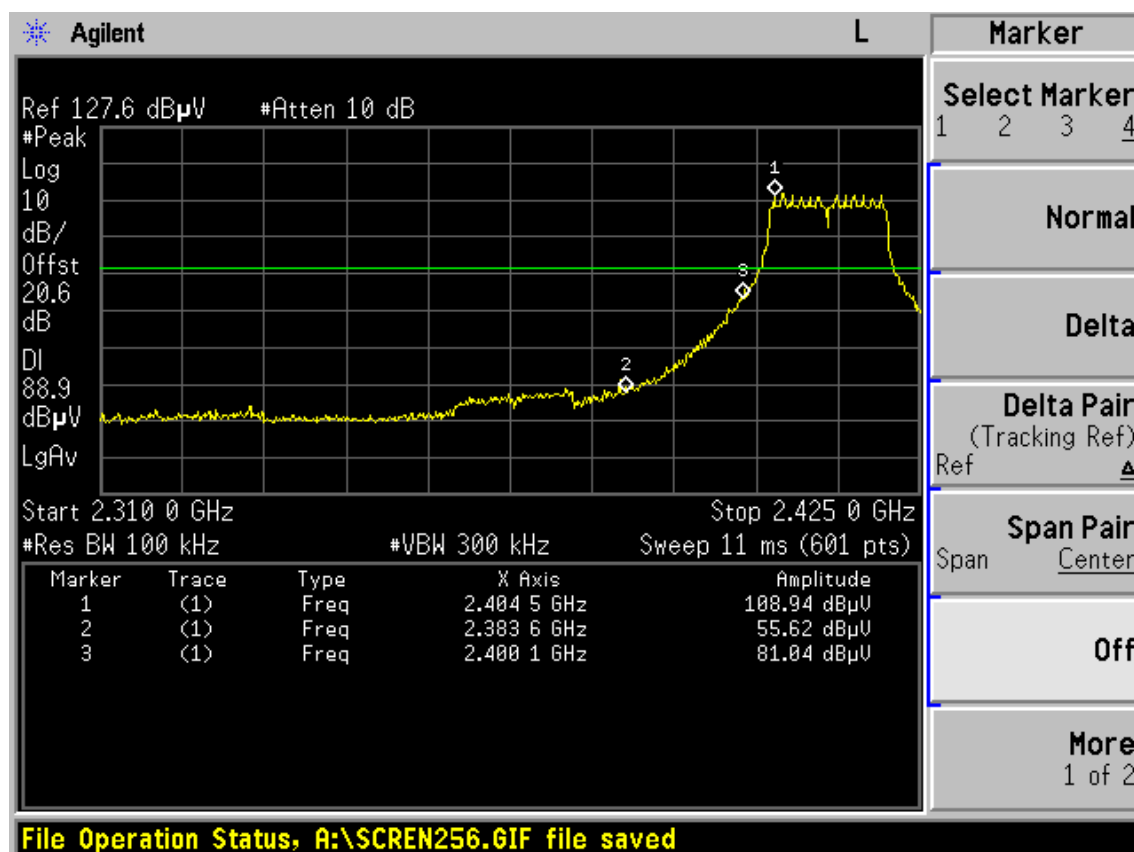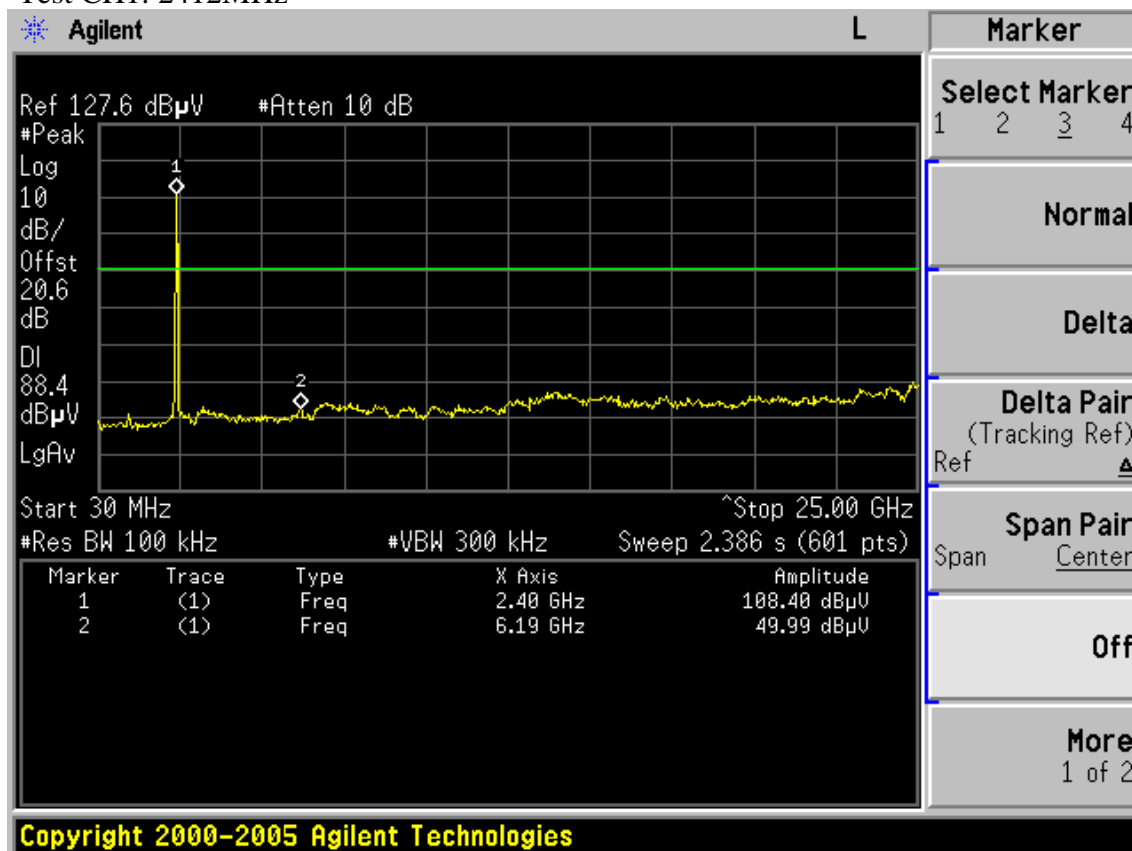

Test CH6: 2437MHz


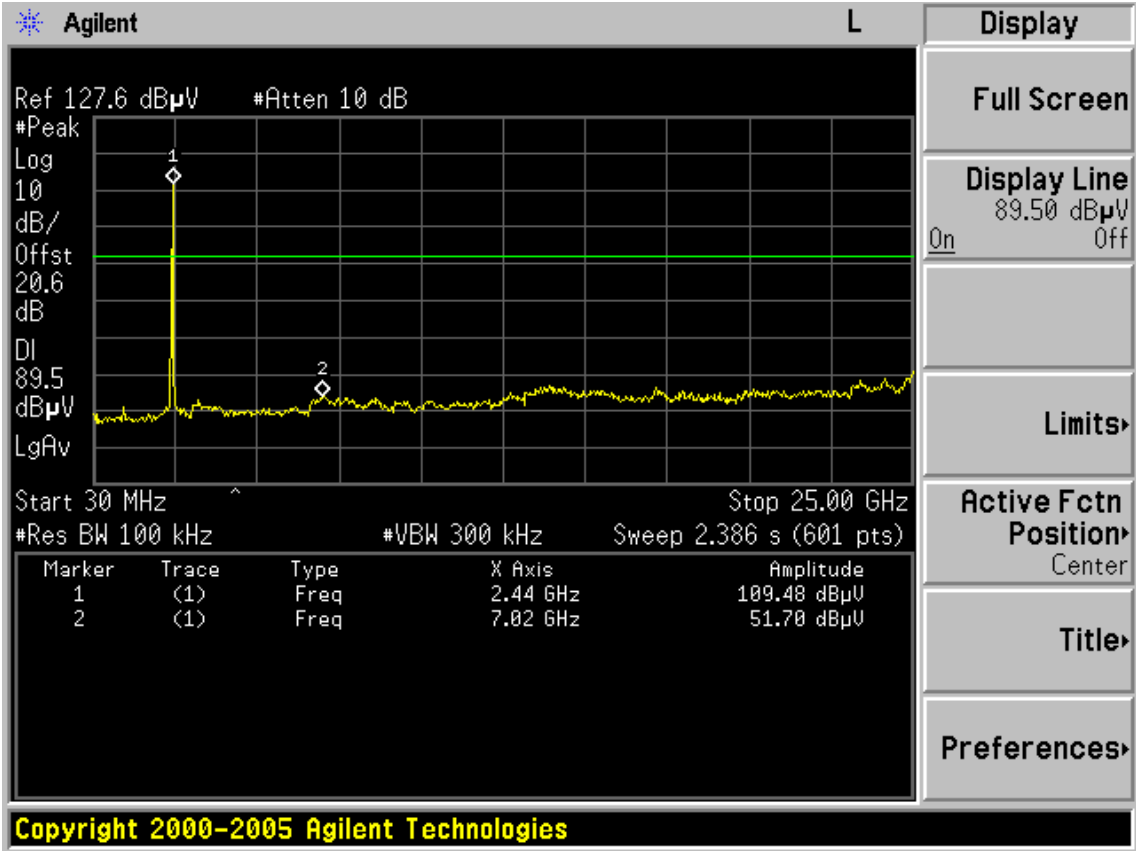


Test CH11: 2462MHz

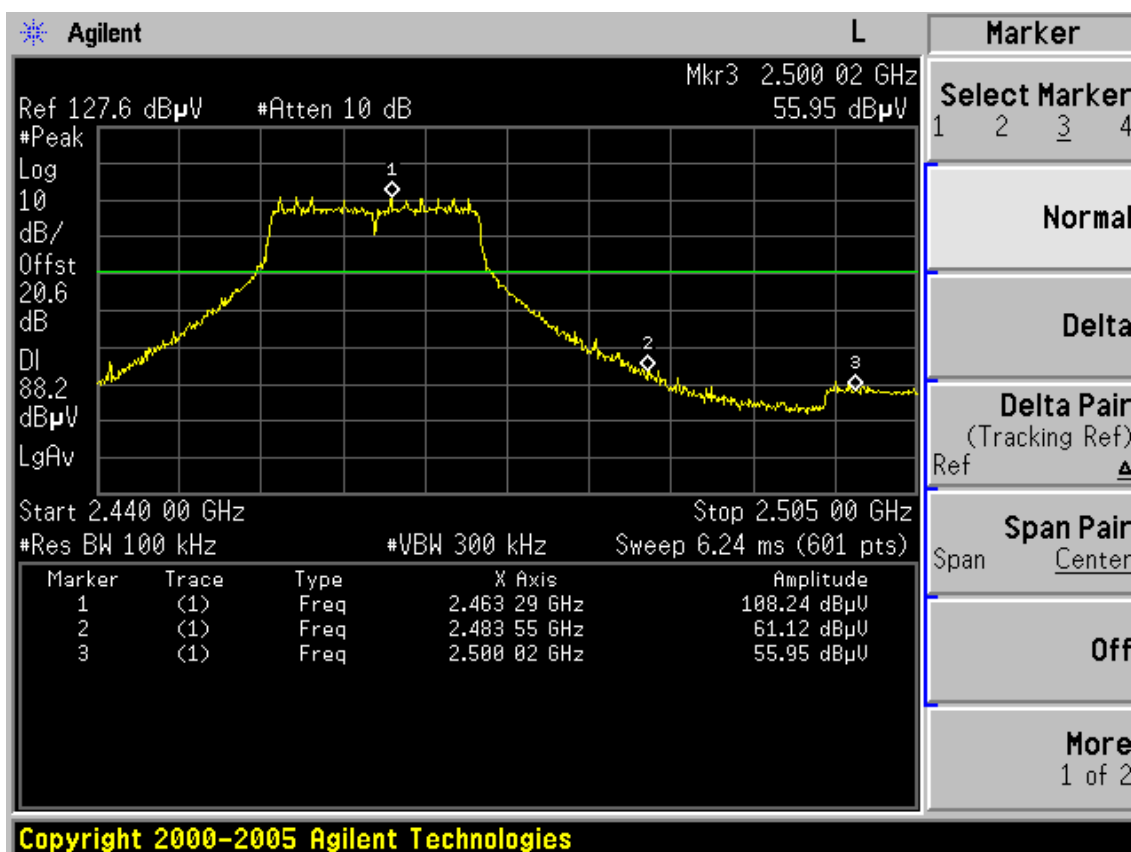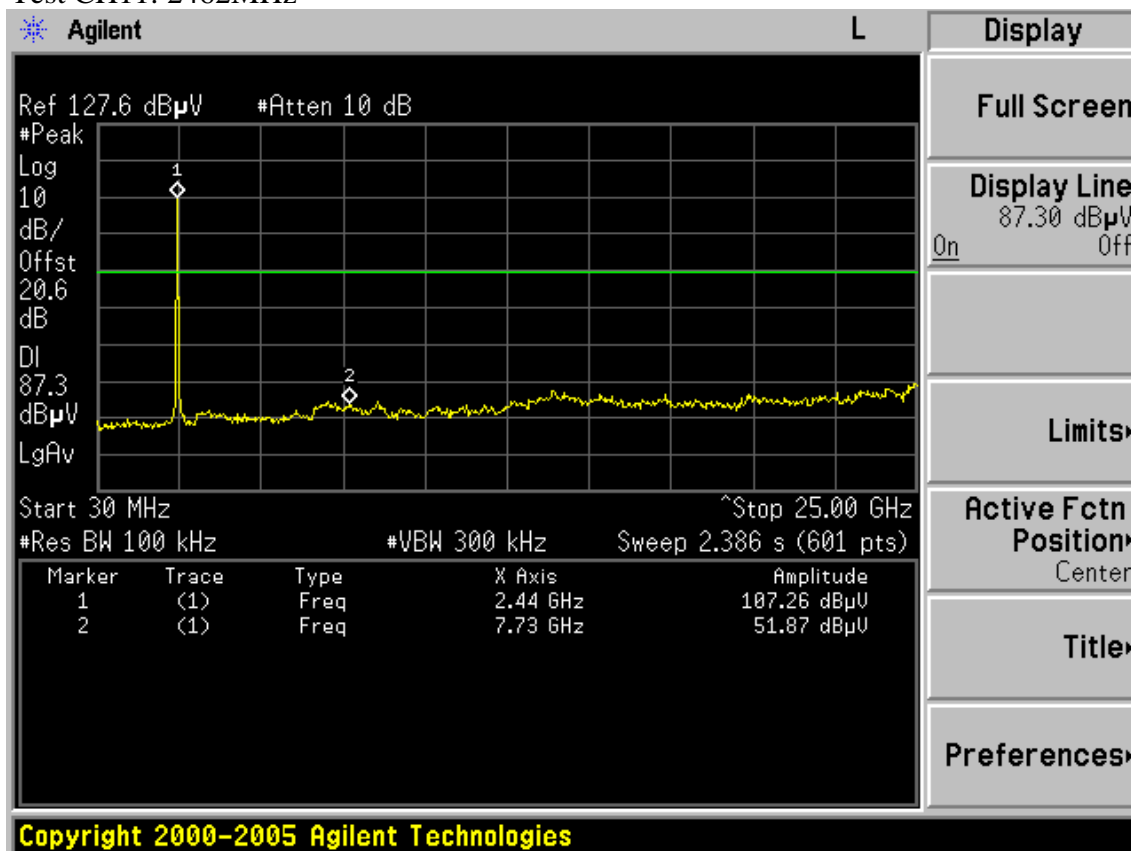


Test Mode: IEEE 802.11n HT20 TX



Test CH1: 2412MHz

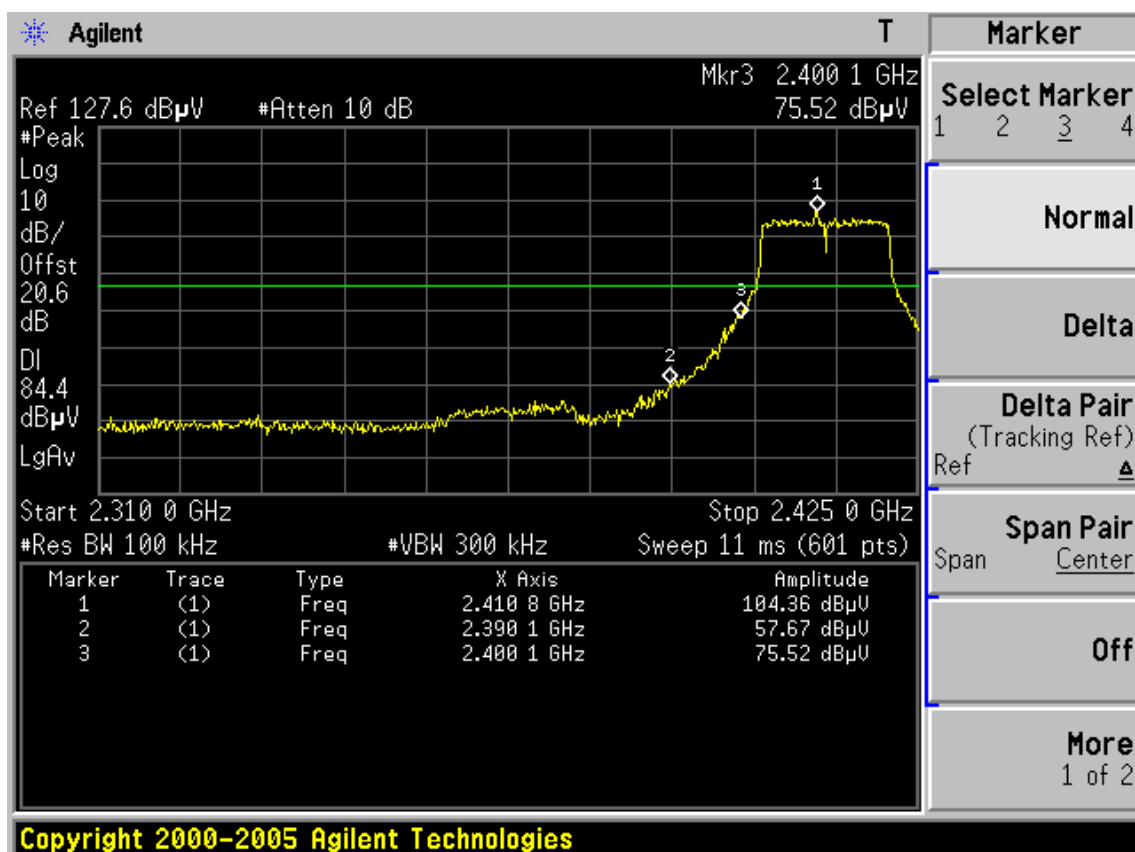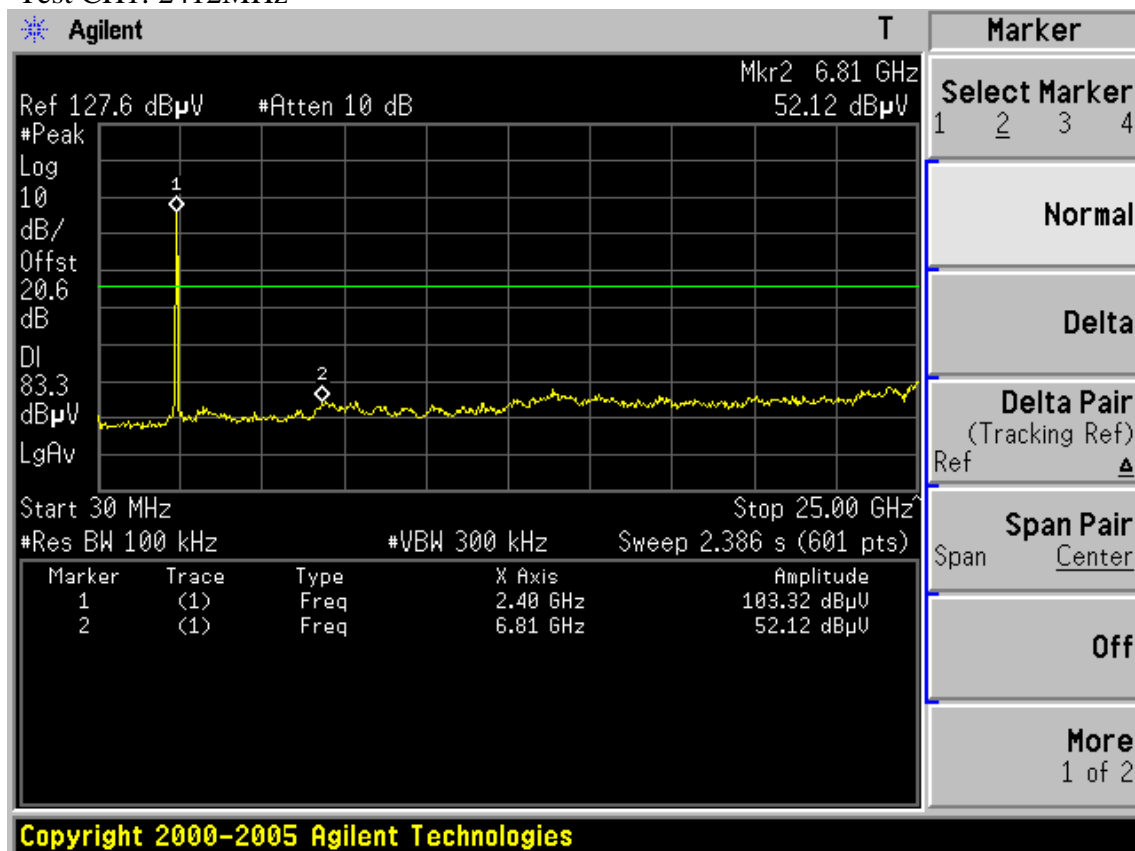

Test CH6: 2437MHz


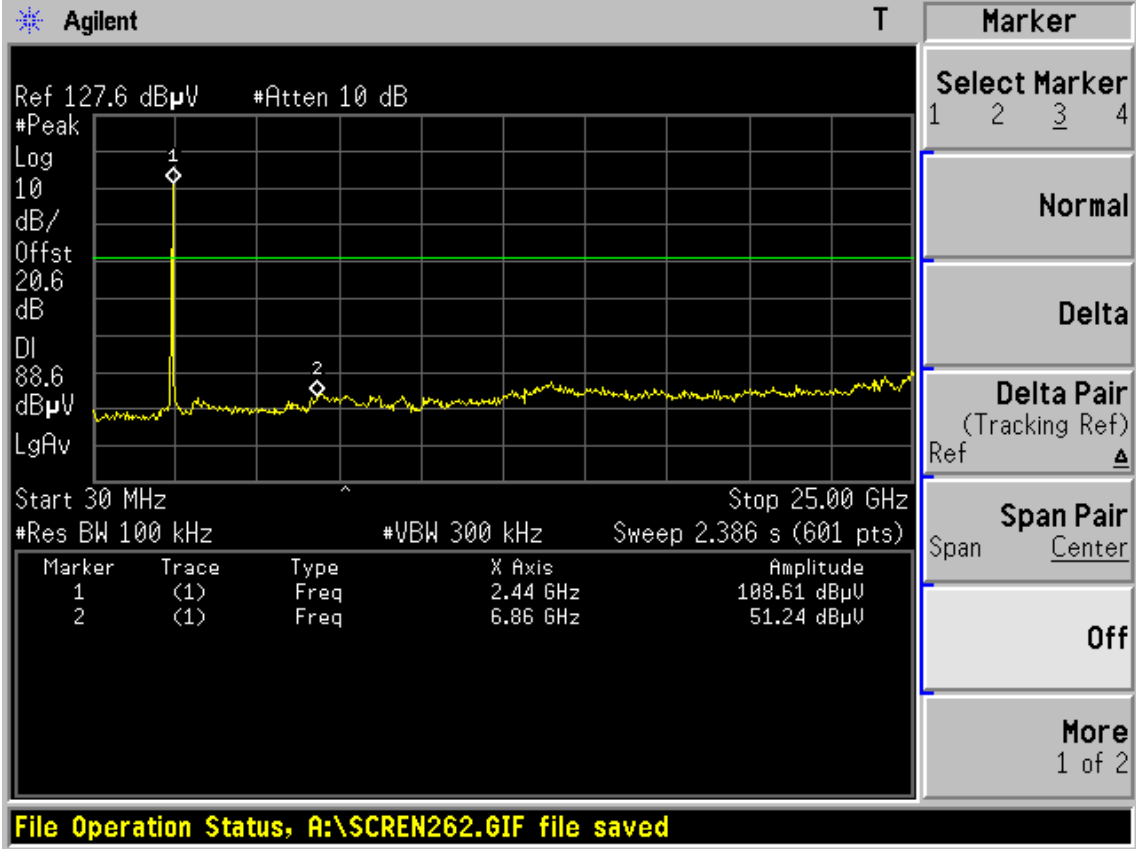


Test CH11: 2462MHz

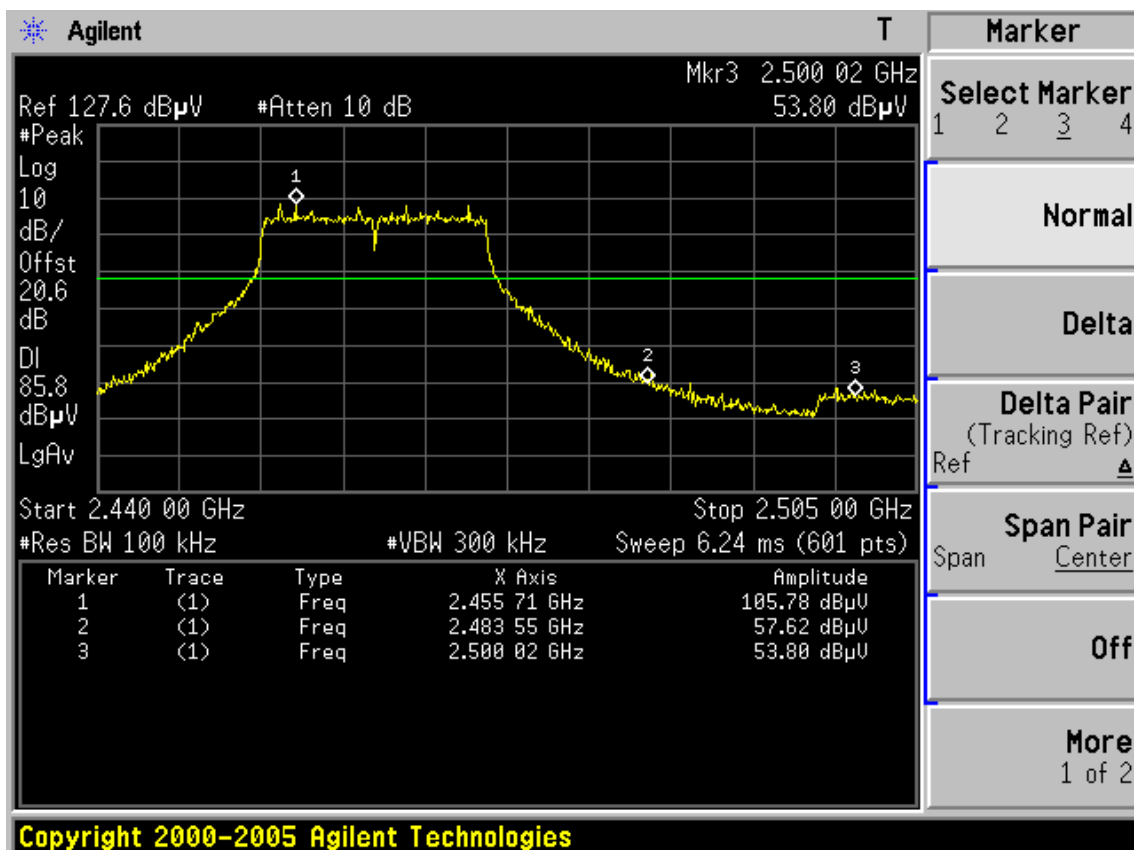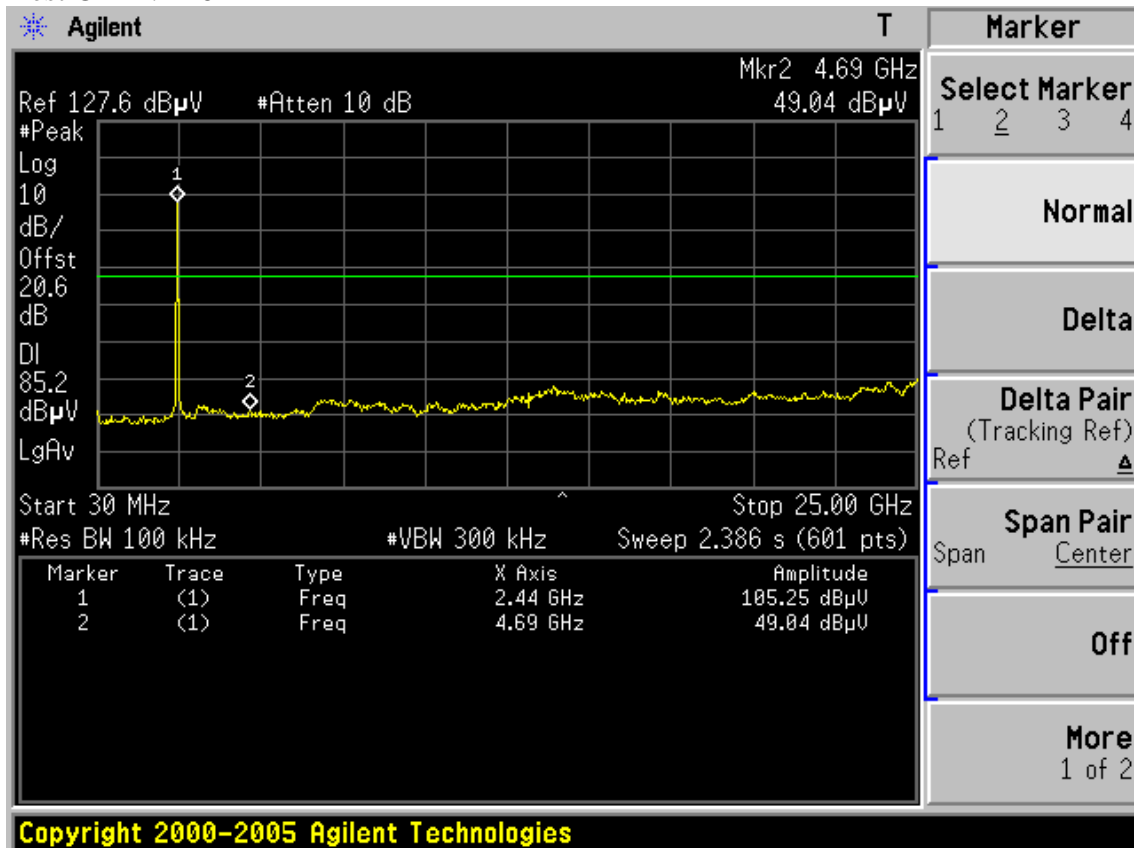


Test Mode: IEEE 802.11n HT40 TX

Test CH1: 2422MHz

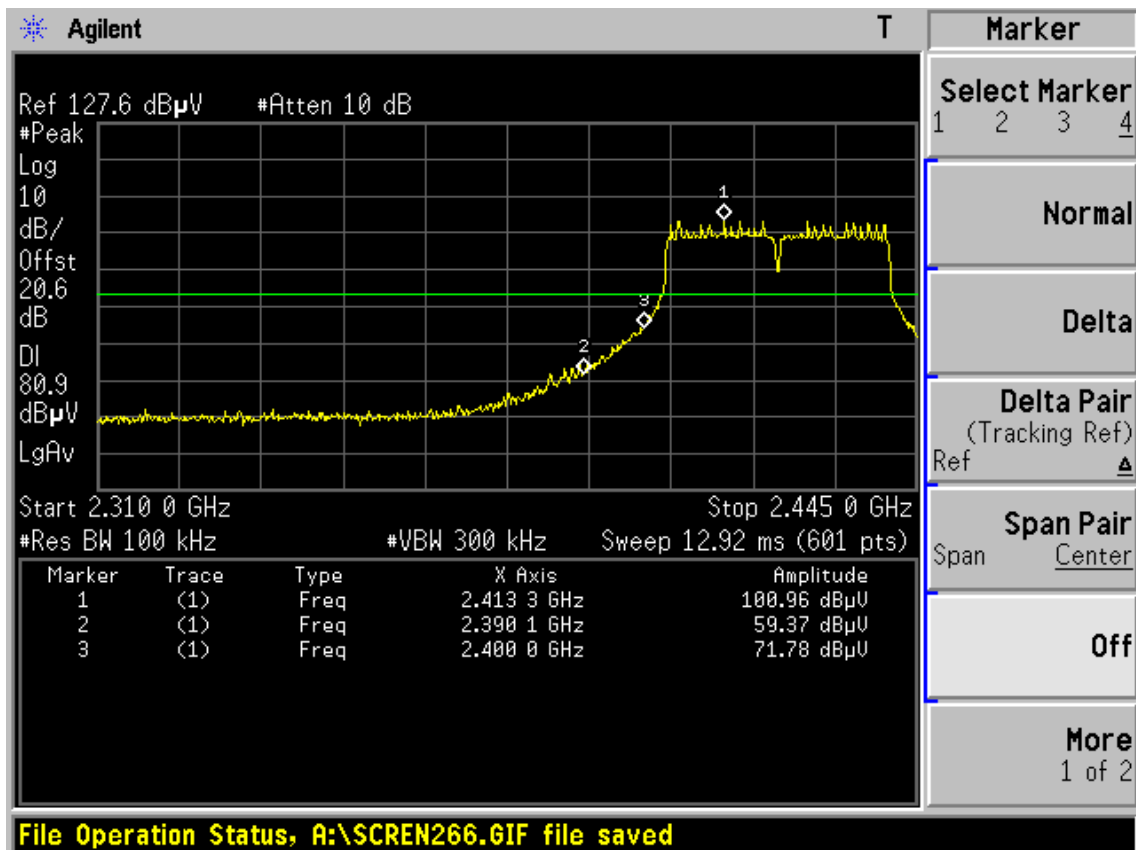
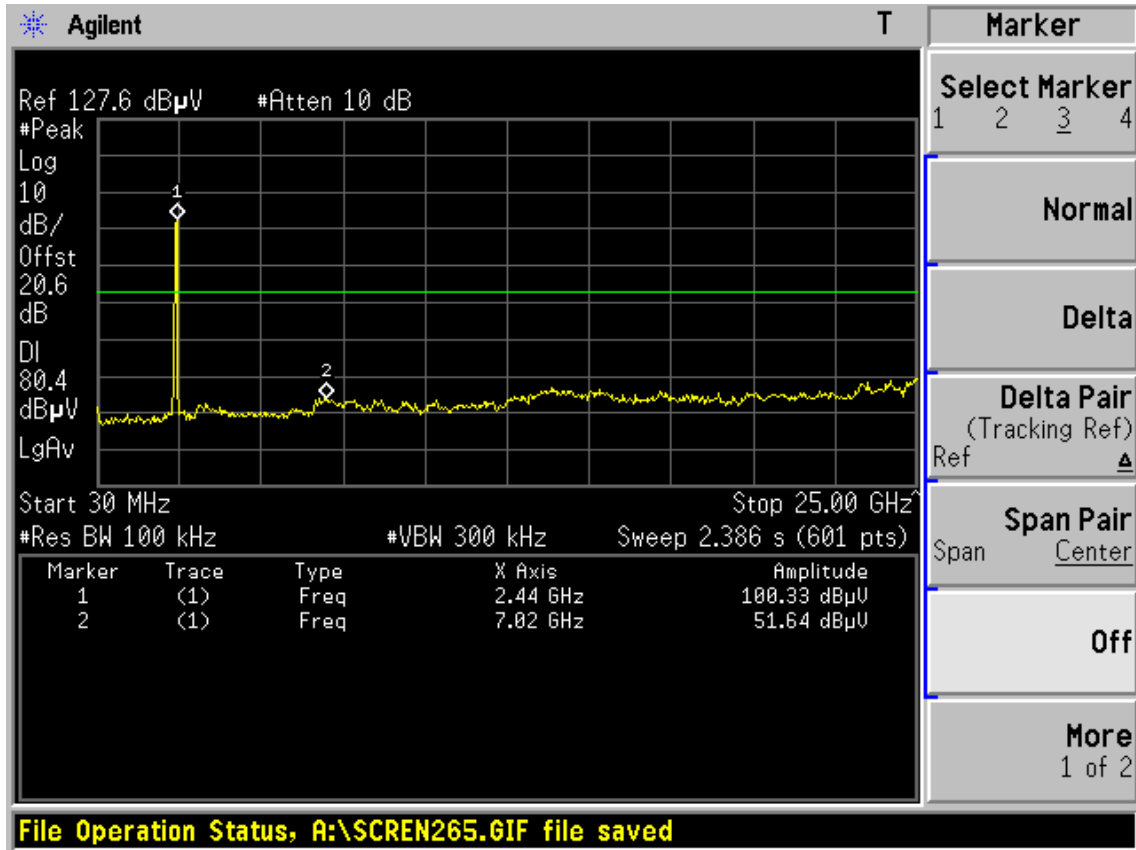


Test CH4: 2437MHz

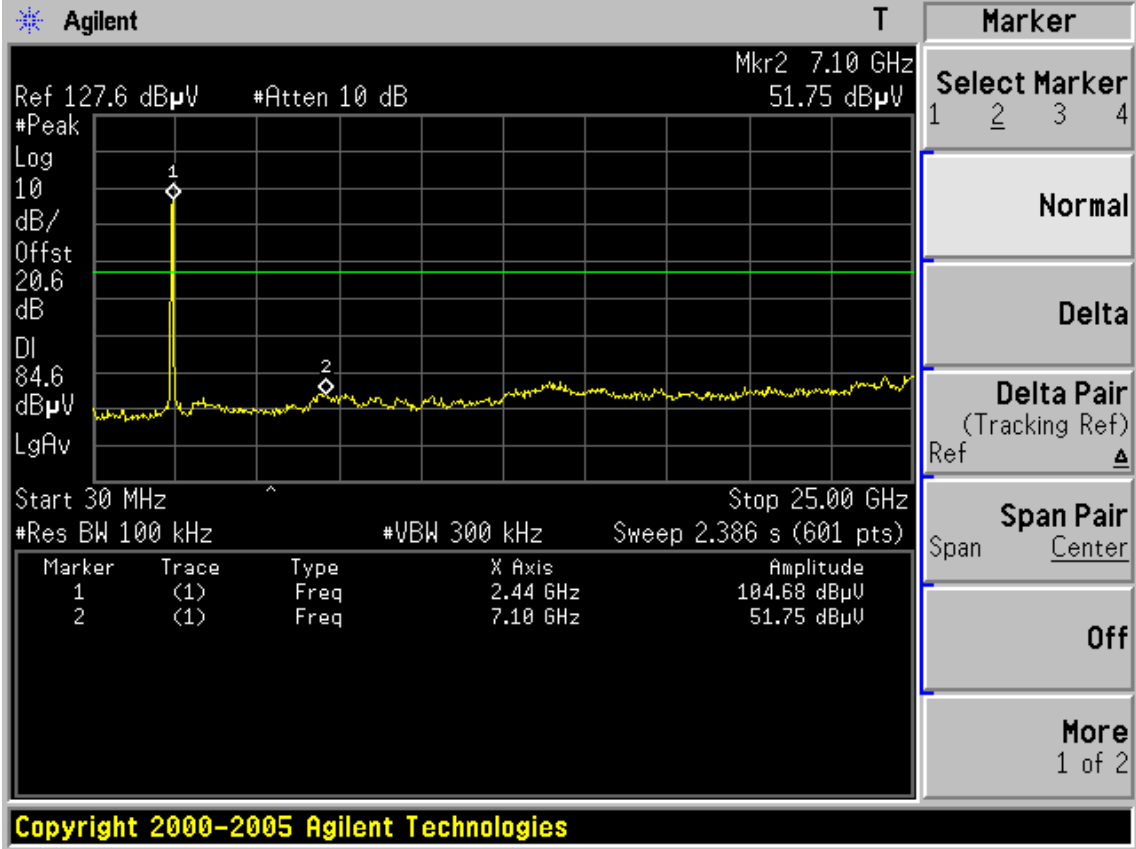



Test CH7: 2452MHz

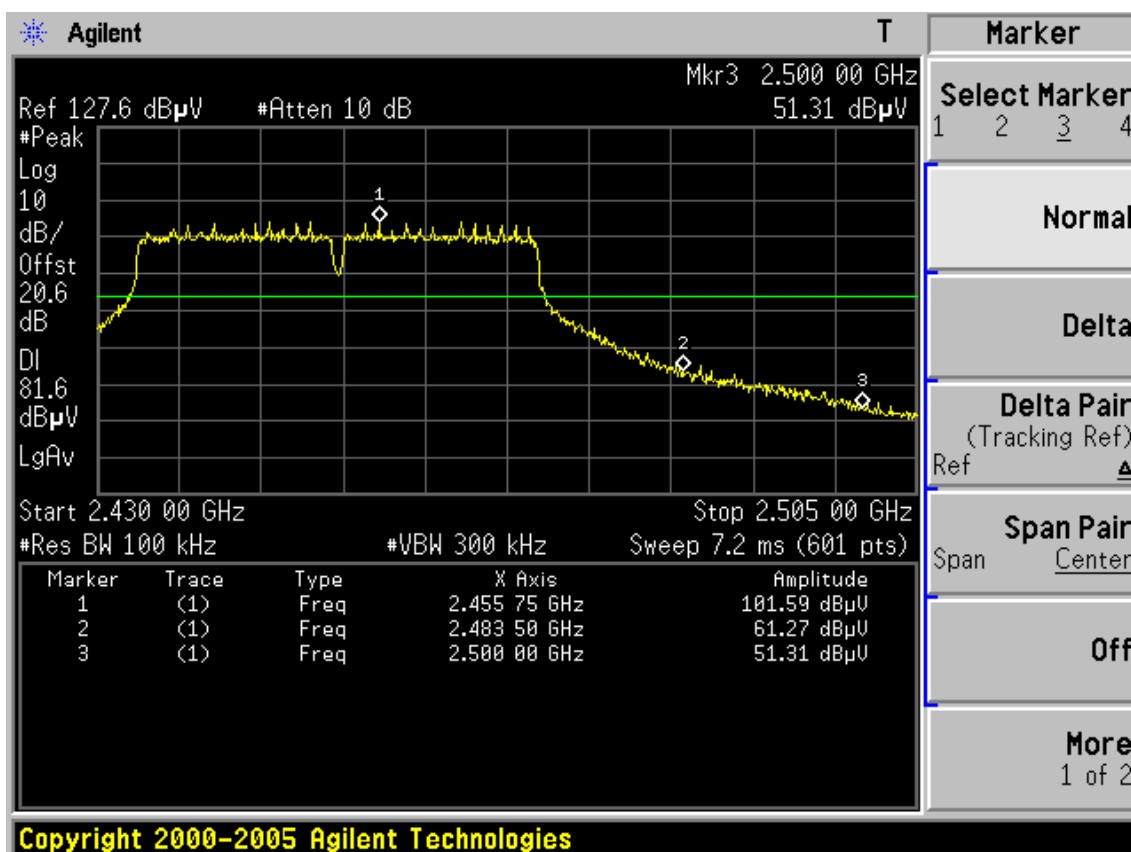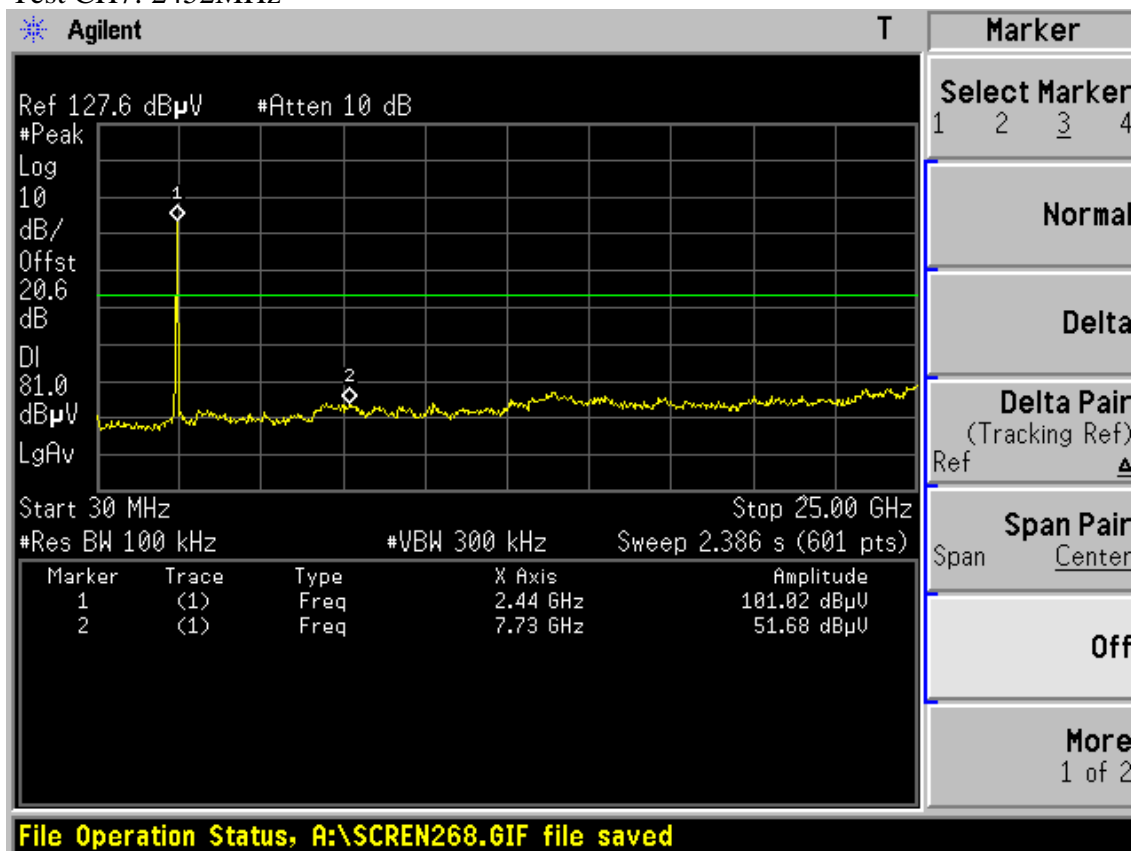

## 6. BAND EDGE COMPLIANCE TEST

### 6.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	E4446A	US44300459	May.08, 09	1 Year
2.	Horn Antenna	EMCO	3115	9607-4877	May.27, 08	1.5 Year
3.	Amplifier	Agilent	8449B	3008A02495	May.08, 09	1 Year
4.	RF Cable	Hubersuhner	SUCOFLEX 102	28620/2	May.08, 09	1 Year
5.	RF Cable	Hubersuhner	SUCOFLEX 102	271471/4	May.08, 09	1 Year
6.	RF Cable	Hubersuhner	SUCOFLEX 102	29086/2	May.08, 09	1 Year

### 6.2. Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

### 6.3. Test Produce

1. The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upperband-edges of the emission:
  - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
  - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

### 6.4. Test Results


Pass (The testing data was attached in the next pages.)

All the emissions outside operation frequency band were comply with 15.209 limit



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 1 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

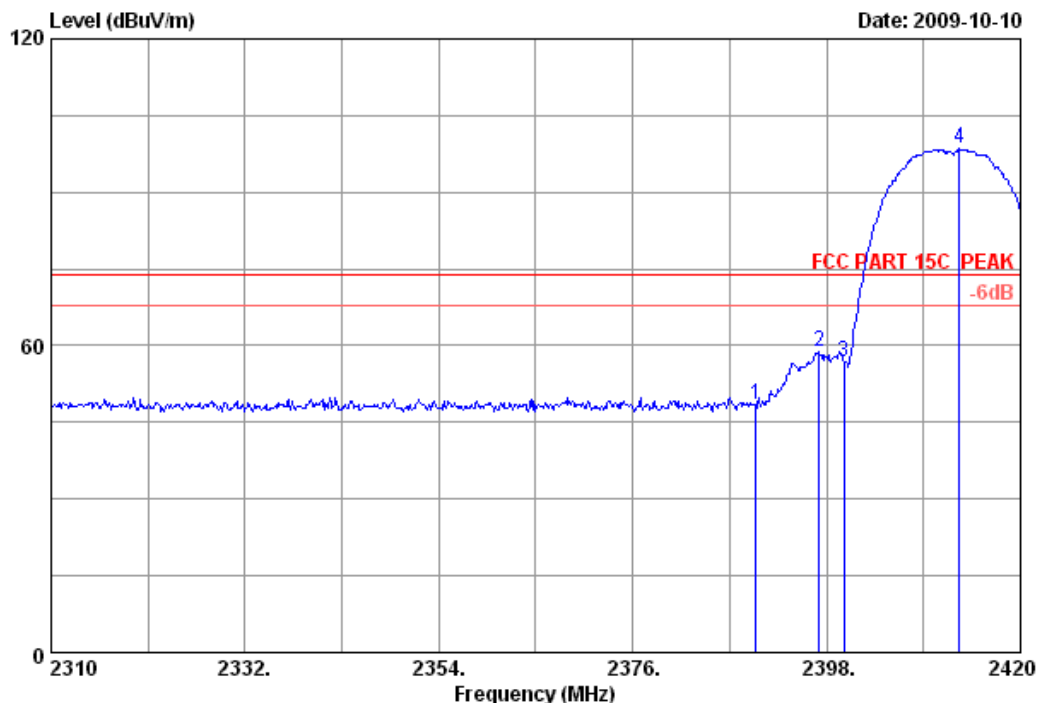

Site no. : 3m Chamber Data no. : 1  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11b CH1 2412MHz  
M/N : TL-WN722N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dbuv)	Emission			
						Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	28.46	8.41	36.09	47.75	48.53	74.00	25.47	Peak
2	2397.120	28.46	8.41	36.09	57.92	58.70	74.00	15.30	Peak
3	2400.000	28.46	8.60	36.09	55.74	56.71	74.00	17.29	Peak
4	2413.070	28.48	8.60	35.95	97.32	98.45	74.00	-24.45	Peak


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 2 File: E:\2009 report data\TP-LINK\TL-WN722N.EM6 (104)

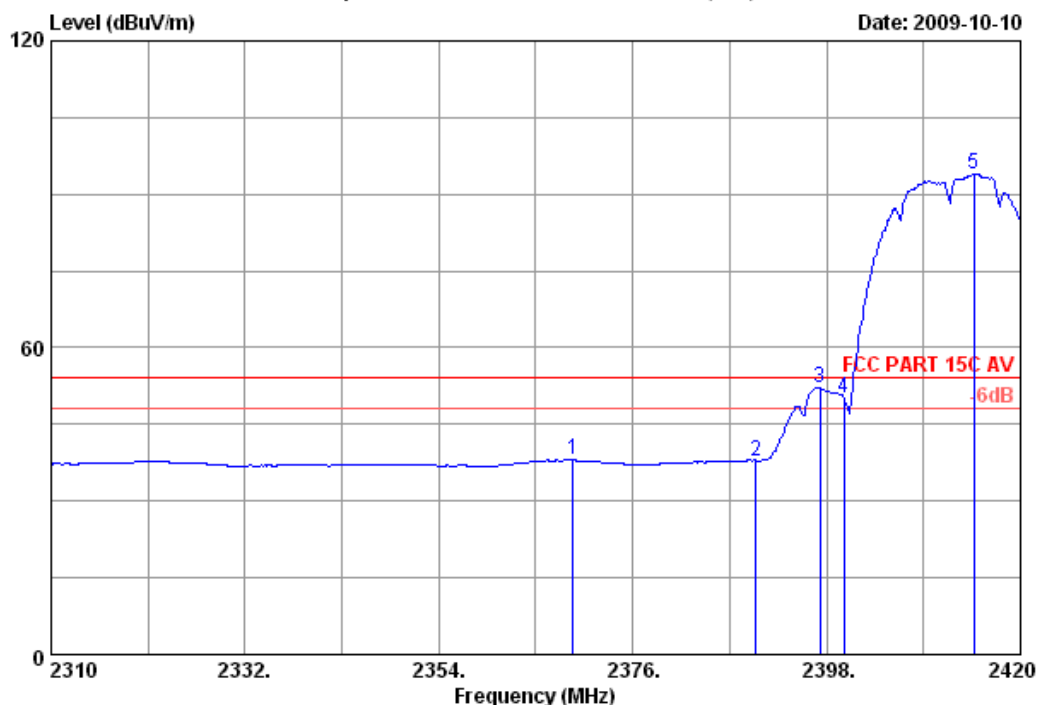

Site no. : 3m Chamber Data no. : 2  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C AV  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11b CH1 2412MHz  
M/N : TL-WN722N

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dbuv)	(dBuV/m)	(dBuV/m)	(dB)	
1	2369.180	28.43	8.44	36.00	37.15	38.02	54.00	15.98	Average
2	2390.000	28.46	8.41	36.09	37.16	37.94	54.00	16.06	Average
3	2397.230	28.46	8.41	36.09	51.29	52.07	54.00	1.93	Average
4	2400.000	28.46	8.60	36.09	49.06	50.03	54.00	3.97	Average
5	2414.720	28.48	8.60	35.95	92.79	93.92	54.00	-39.92	Average


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 3 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

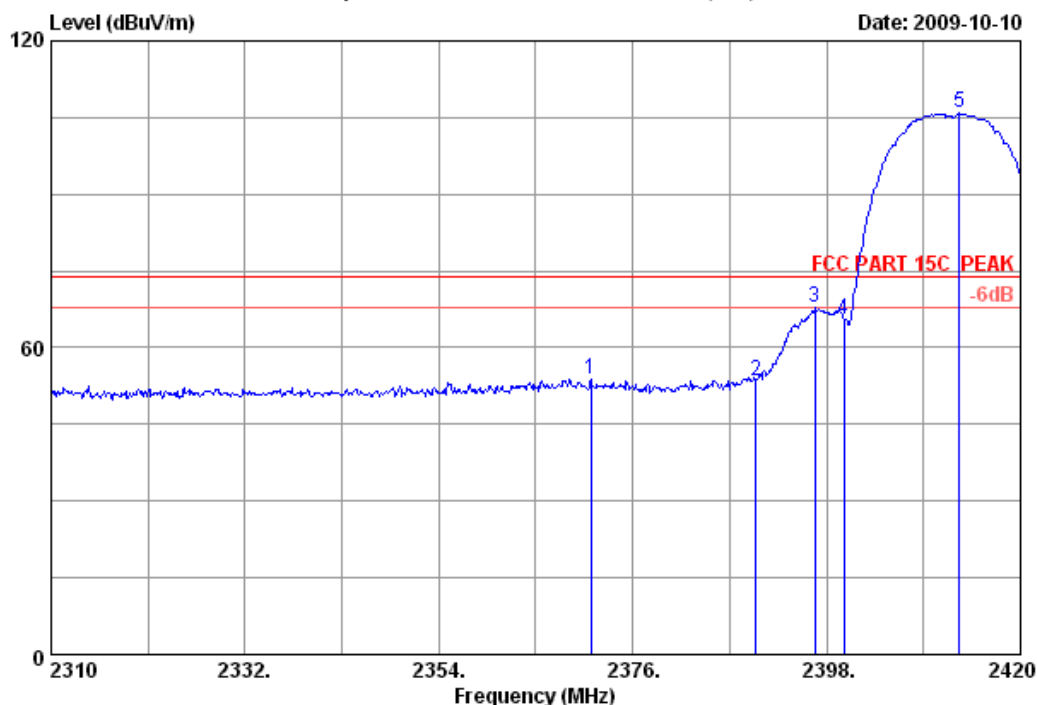

Site no. : 3m Chamber Data no. : 3  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11b CH1 2412MHz  
M/N : TL-WN722N

		Ant.	Cable	Amp.		Emission			
Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dbuv)	(dBuV/m)	(dBuV/m)	(dB)		
1	2371.270	28.43	8.44	36.00	53.09	53.96	74.00	20.04	Peak
2	2390.000	28.46	8.41	36.09	52.67	53.45	74.00	20.55	Peak
3	2396.680	28.46	8.41	36.09	67.08	67.86	74.00	6.14	Peak
4	2400.000	28.46	8.60	36.09	64.48	65.45	74.00	8.55	Peak
5	2413.070	28.48	8.60	35.95	104.71	105.84	74.00	-31.84	Peak


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 4 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

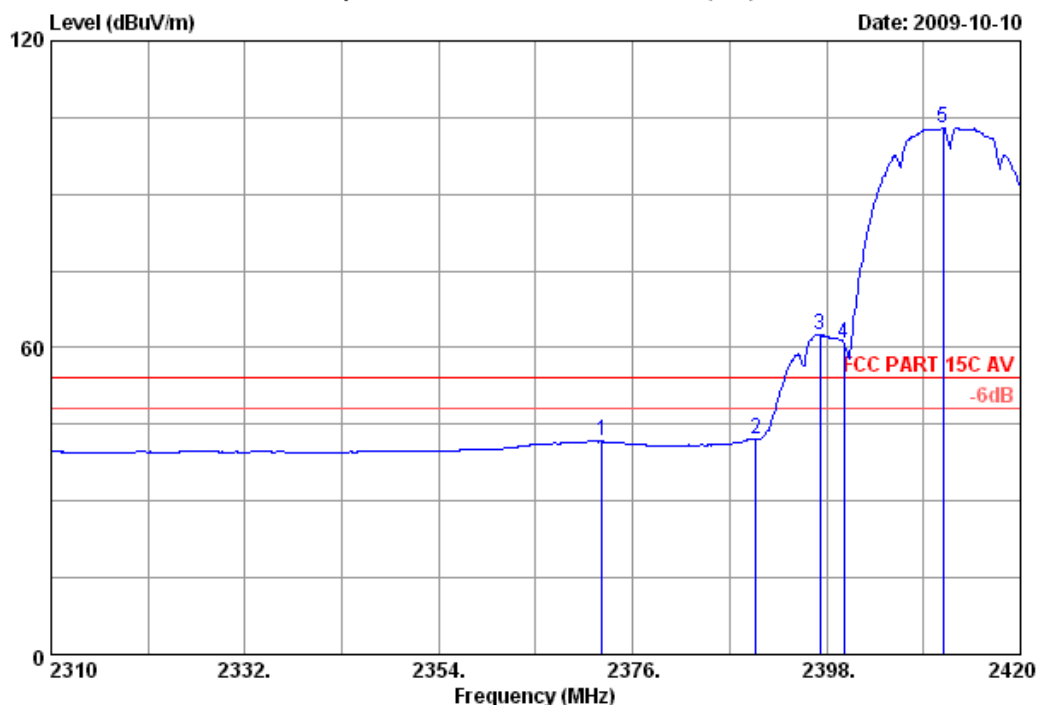

Site no. : 3m Chamber Data no. : 4  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : VERTICAL  
Limit : FCC PART 15C AV  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11b CH1 2412MHz  
M/N : TL-WN722N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dbuv)	Emission			
						Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2372.480	28.43	8.44	36.00	40.91	41.78	54.00	12.22	Average
2	2390.000	28.46	8.41	36.09	41.26	42.04	54.00	11.96	Average
3	2397.230	28.46	8.41	36.09	61.78	62.56	54.00	-8.56	Average
4	2400.000	28.46	8.60	36.09	59.93	60.90	54.00	-6.90	Average
5	2411.200	28.48	8.60	35.95	101.92	103.05	54.00	-49.05	Average


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 5 File: E:\2009 report data\TP-LINK\TL-WN722N.EM6 (104)

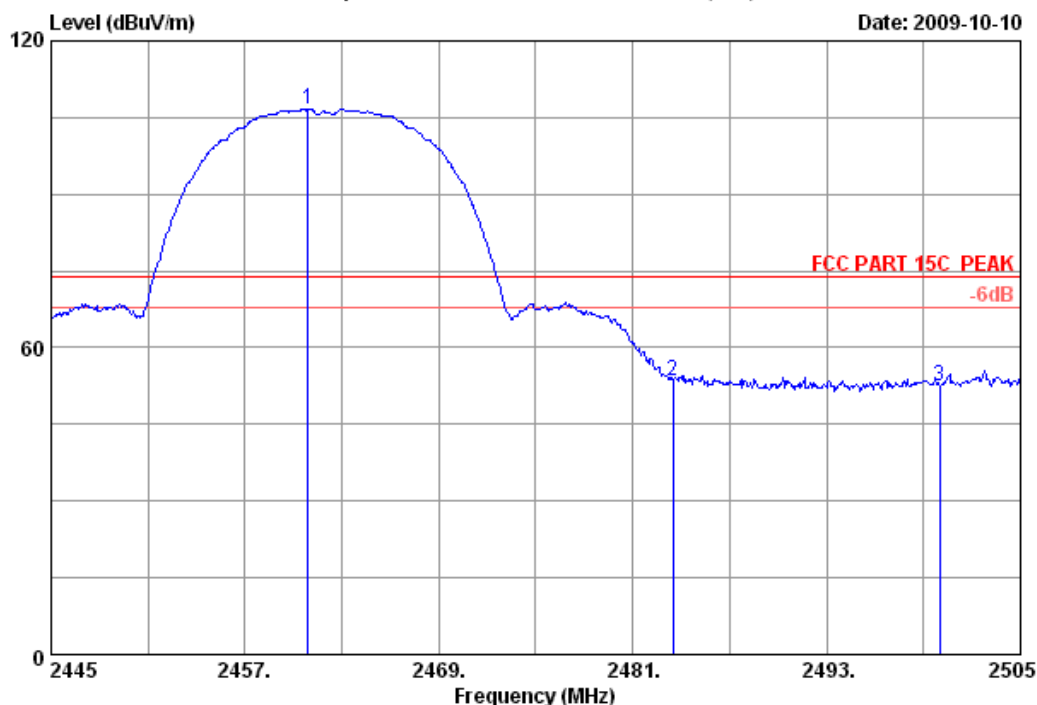

Site no.	: 3m Chamber	Data no.	: 5
Dis. / Ant.	: 3m 3115(0905)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless High Gain USB Adapter		
Power	: DC 5V From PC Input AC 120V/60Hz		
Test mode	: IEEE802.11b CH11 2462MHz		
M/N	: TL-WN722N		

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dbuv)	Emission			
						Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2460.900	28.55	8.76	36.02	105.37	106.66	74.00	-32.66	Peak
2	2483.500	28.58	8.94	35.97	51.92	53.47	74.00	20.53	Peak
3	2500.000	28.60	8.89	36.00	51.07	52.56	74.00	21.44	Peak


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 6 File: E:\2009 report data\TP-LINK\TL-WN722N.EM6 (104)

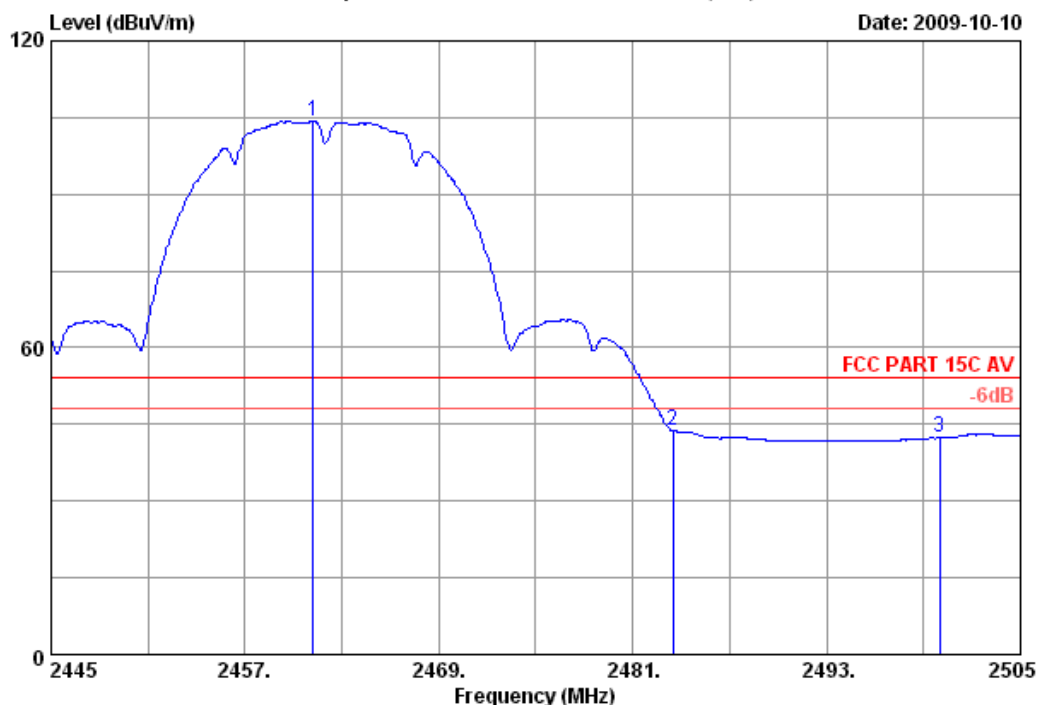

Site no. : 3m Chamber Data no. : 6  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : VERTICAL  
Limit : FCC PART 15C AV  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11b CH11 2462MHz  
M/N : TL-WN722N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dbuv)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2461.200	28.55	8.76	36.02	103.09	104.38	54.00	-50.38	Average
2	2483.500	28.58	8.94	35.97	42.12	43.67	54.00	10.33	Average
3	2500.000	28.60	8.89	36.00	40.90	42.39	54.00	11.61	Average

Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.





No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 7 File: E:\2009 report data\TP-LINK\TL-WN722N.EM6 (104)

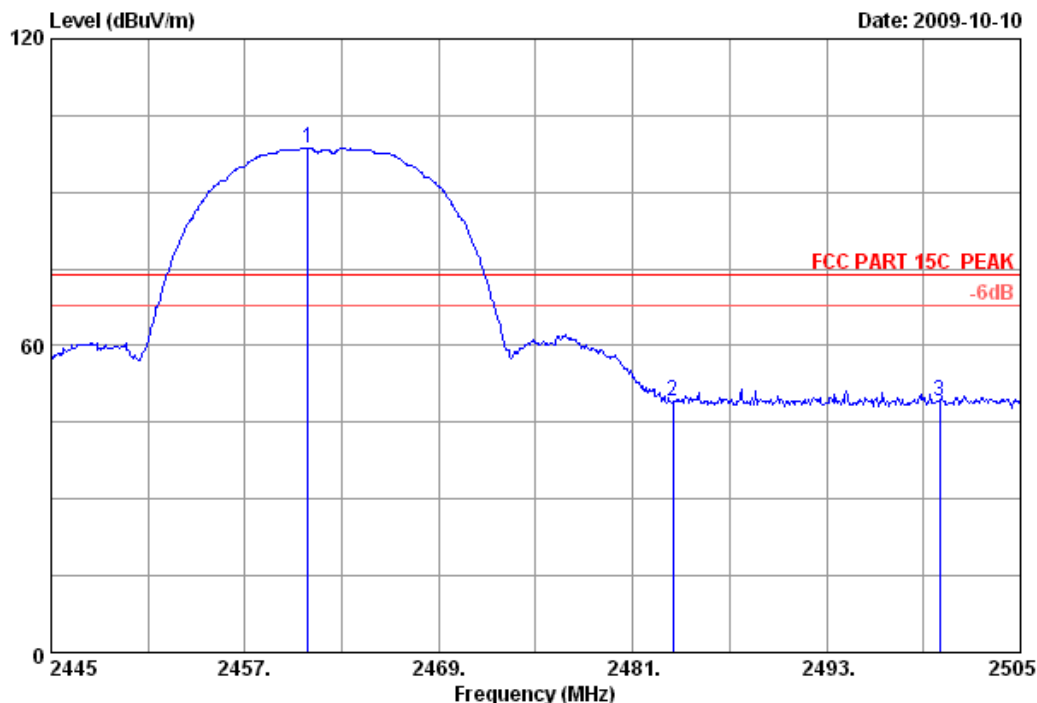

Site no. : 3m Chamber Data no. : 7  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11b CH11 2462MHz  
M/N : TL-WN722N

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dbuv)	(dBuV/m)	(dBuV/m)	(dB)	
1	2460.900	28.55	8.76	36.02	97.38	98.67	74.00	-24.67	Peak
2	2483.500	28.58	8.94	35.97	47.46	49.01	74.00	24.99	Peak
3	2500.000	28.60	8.89	36.00	47.62	49.11	74.00	24.89	Peak


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 8 File: E:\2009 report data\TP-LINK\TL-WN722N.EM6 (104)

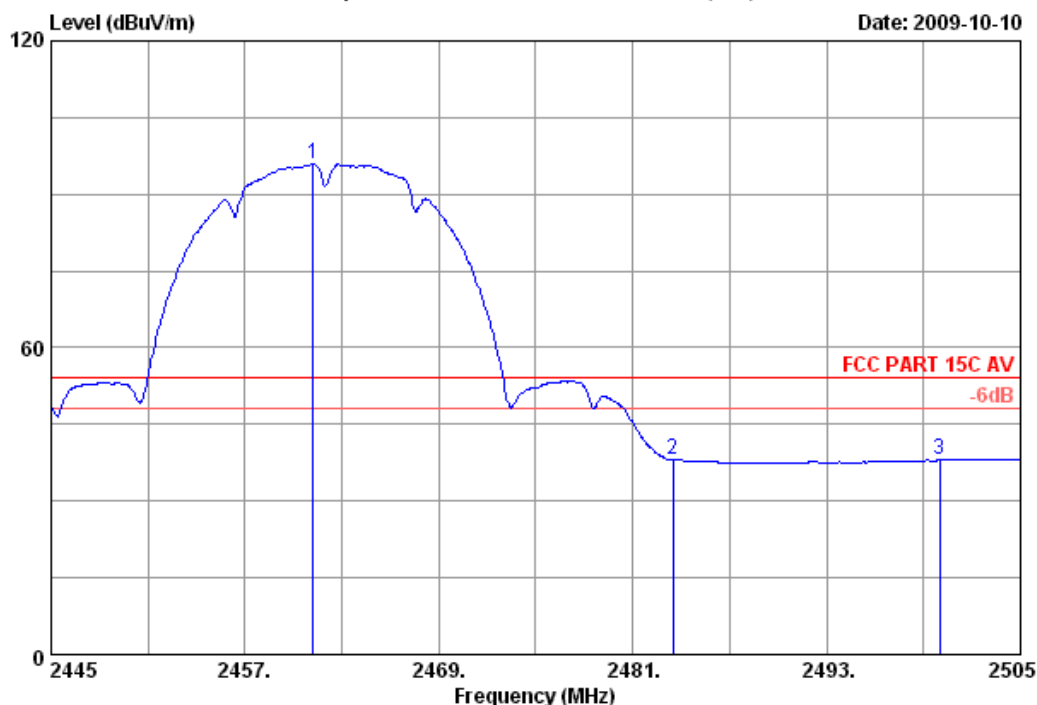

Site no. : 3m Chamber Data no. : 8  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C AV  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11b CH11 2462MHz  
M/N : TL-WN722N

	Freq.	Ant.	Cable	Amp.		Emission			
	(MHz)	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dbuv)	(dBuV/m)	(dBuV/m)	(dB)	
1	2461.200	28.55	8.76	36.02	94.64	95.93	54.00	-41.93	Average
2	2483.500	28.58	8.94	35.97	36.53	38.08	54.00	15.92	Average
3	2500.000	28.60	8.89	36.00	36.47	37.96	54.00	16.04	Average


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 9 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

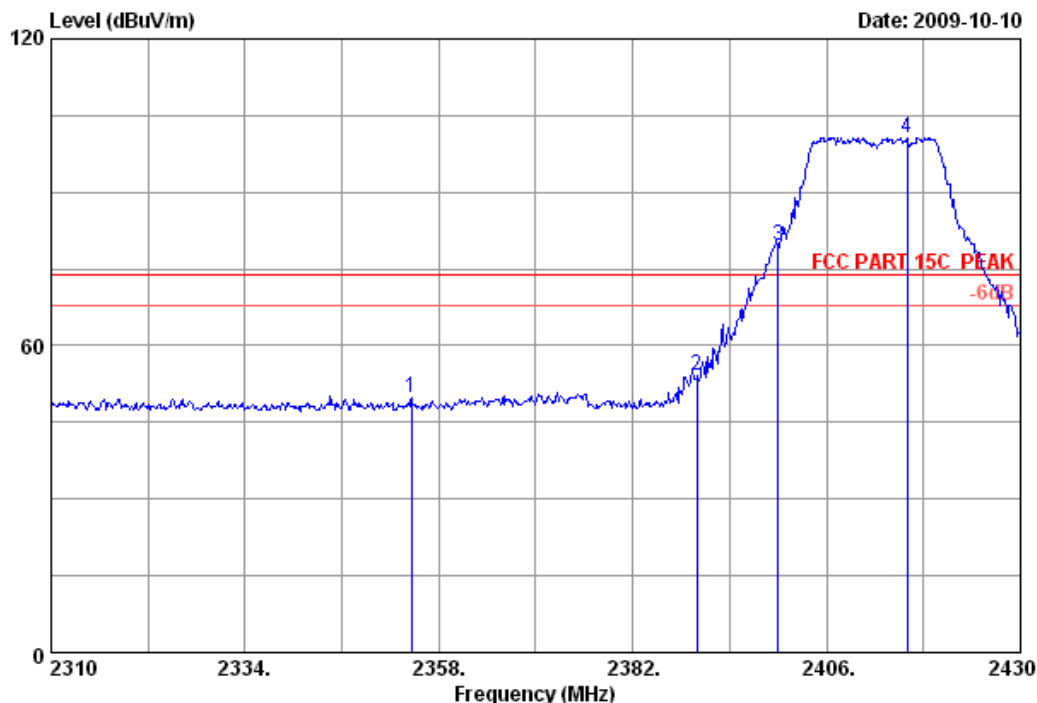

Site no. : 3m Chamber Data no. : 9  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11g CH1 2412MHz  
M/N : TL-WN722N

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dbuv)	(dBuV/m)	(dBuV/m)	(dB)	
1	2354.640	28.41	8.57	35.91	48.81	49.88	74.00	24.12	Peak
2	2390.000	28.46	8.41	36.09	53.34	54.12	74.00	19.88	Peak
3	2400.000	28.46	8.60	36.09	78.73	79.70	74.00	-5.70	Peak
4	2415.960	28.48	8.60	35.95	99.65	100.78	74.00	-26.78	Peak


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 10 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

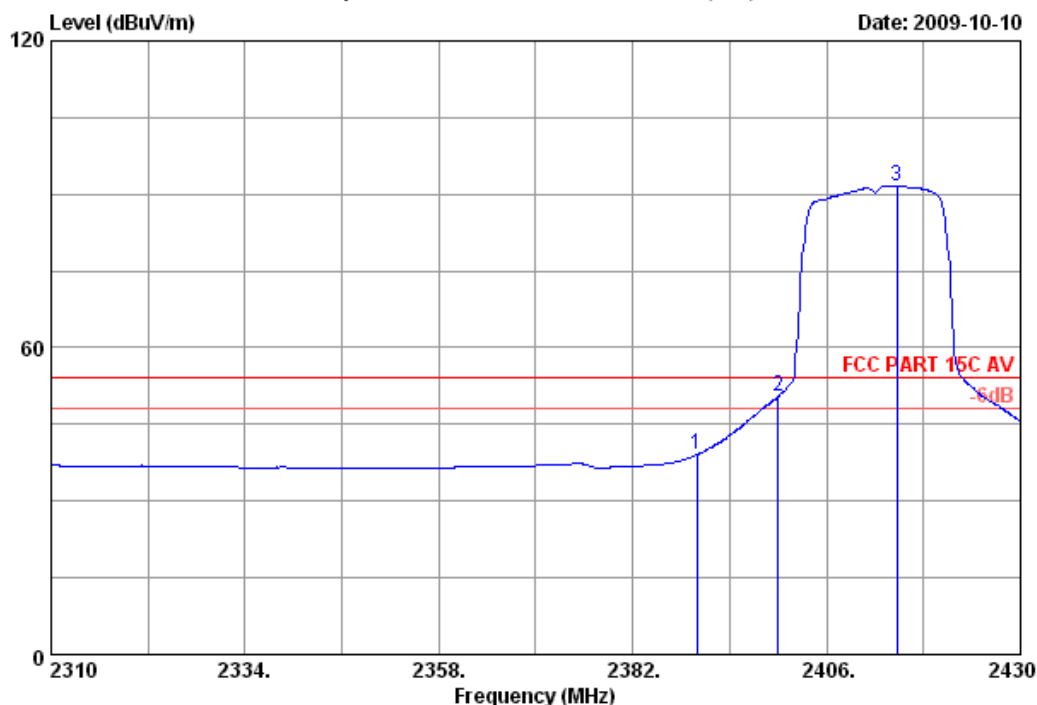

Site no. : 3m Chamber Data no. : 10  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C AV  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11g CH1 2412MHz  
M/N : TL-WN722N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dbuv)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	28.46	8.41	36.09	38.37	39.15	54.00	14.85	Average
2	2400.000	28.46	8.60	36.09	49.45	50.42	54.00	3.58	Average
3	2414.760	28.48	8.60	35.95	90.49	91.62	54.00	-37.62	Average


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 11 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

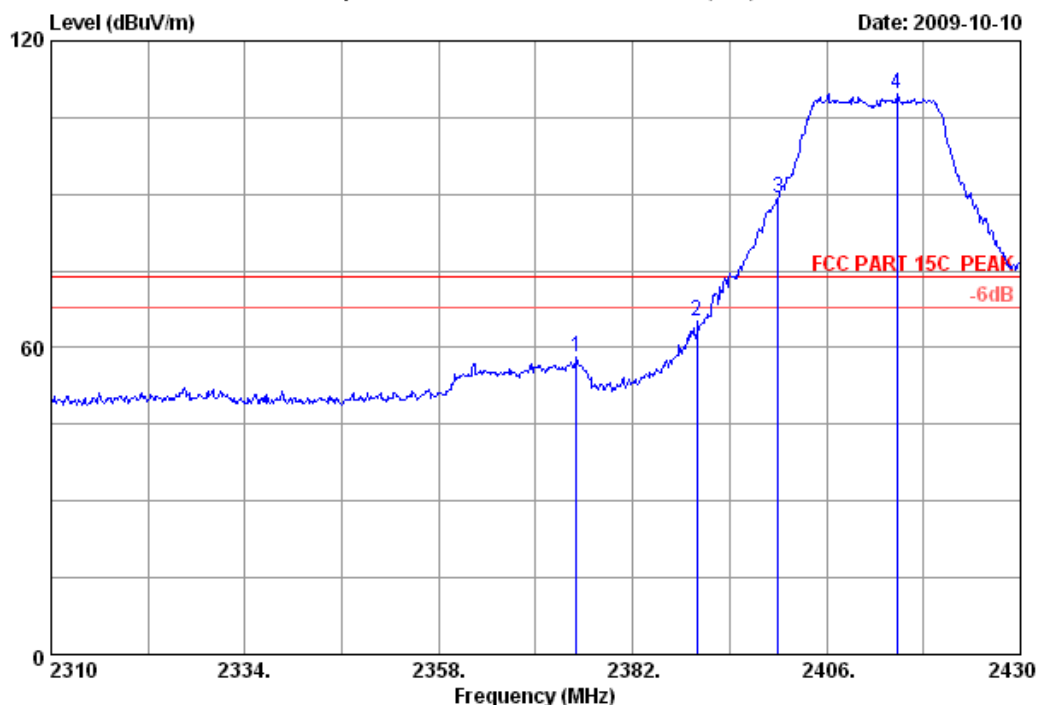

Site no. : 3m Chamber Data no. : 11  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11g CH1 2412MHz  
M/N : TL-WN722N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dbuv)	Emission			
						Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2375.040	28.43	8.44	36.00	57.19	58.06	74.00	15.94	Peak
2	2390.000	28.46	8.41	36.09	64.45	65.23	74.00	8.77	Peak
3	2400.000	28.46	8.60	36.09	88.26	89.23	74.00	-15.23	Peak
4	2414.760	28.48	8.60	35.95	108.39	109.52	74.00	-35.52	Peak


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 12 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

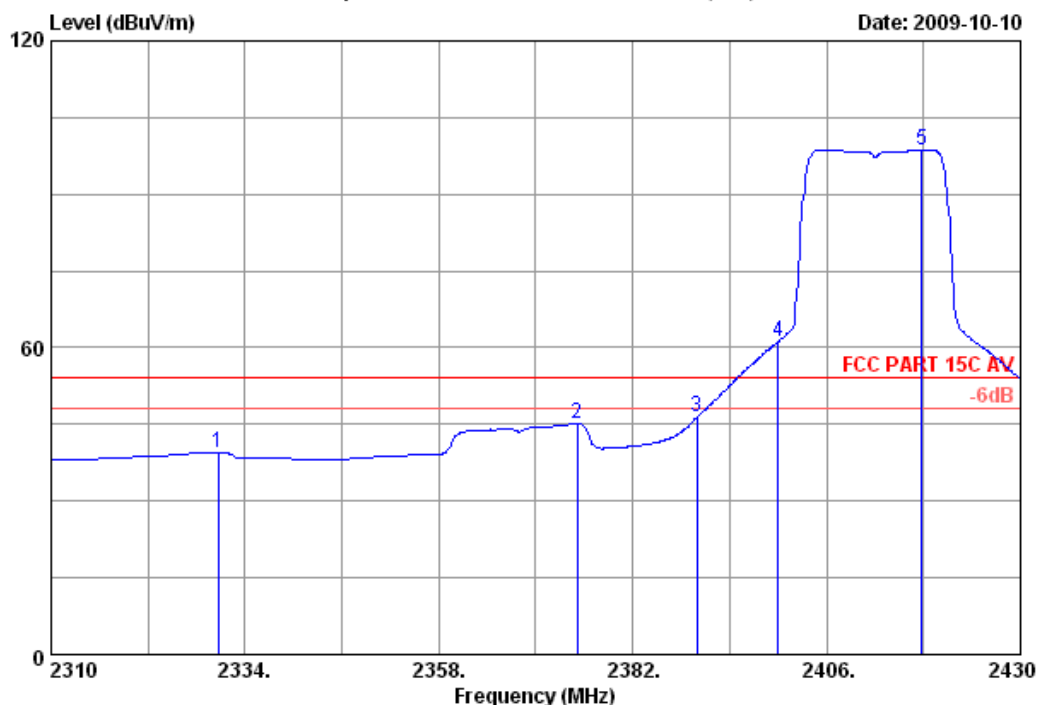

Site no. : 3m Chamber Data no. : 12  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : VERTICAL  
Limit : FCC PART 15C AV  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11g CH1 2412MHz  
M/N : TL-WN722N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dbuv)	Emission			
						Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2330.640	28.36	8.64	36.06	38.61	39.55	54.00	14.45	Average
2	2375.160	28.43	8.44	36.00	44.28	45.15	54.00	8.85	Average
3	2390.000	28.46	8.41	36.09	45.68	46.46	54.00	7.54	Average
4	2400.000	28.46	8.60	36.09	60.18	61.15	54.00	-7.15	Average
5	2417.760	28.48	8.60	35.95	97.61	98.74	54.00	-44.74	Average


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 13 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

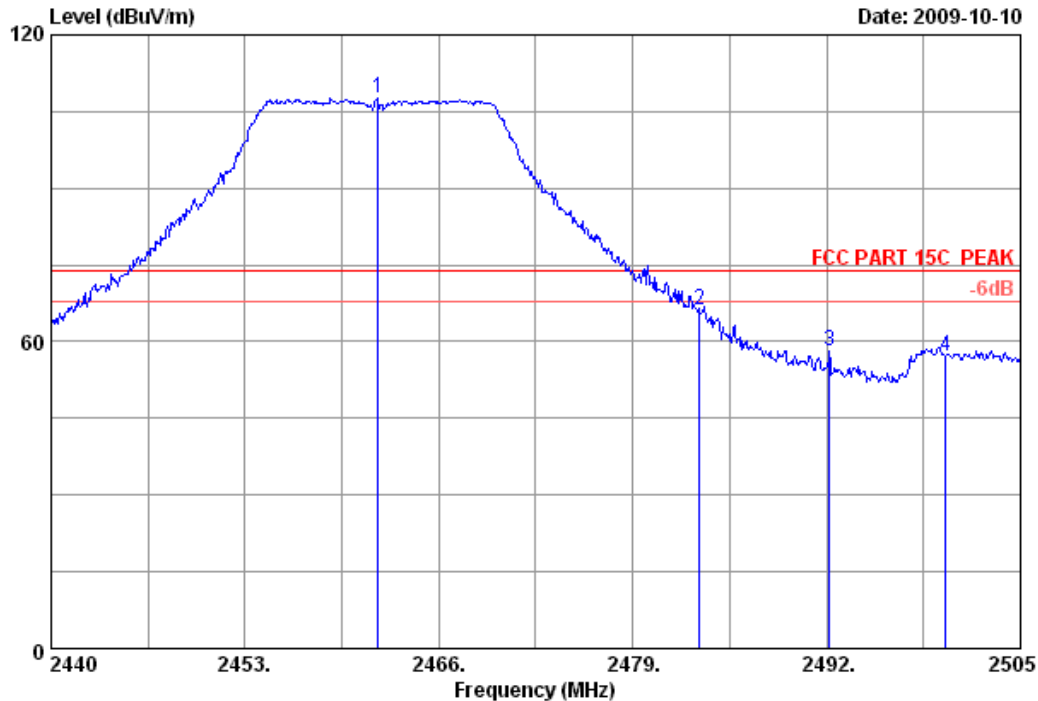

Site no. : 3m Chamber Data no. : 13  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11g CH11 2462MHz  
M/N : TL-WN722N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dbuv)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2461.905	28.55	8.76	36.02	106.33	107.62	74.00	-33.62	Peak
2	2483.500	28.58	8.94	35.97	64.53	66.08	74.00	7.92	Peak
3	2492.195	28.60	8.94	36.00	56.59	58.13	74.00	15.87	Peak
4	2500.000	28.60	8.89	36.00	55.82	57.31	74.00	16.69	Peak


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 14 File: E:\2009 report data\TP-LINK\TL-WN722N.EM6 (104)

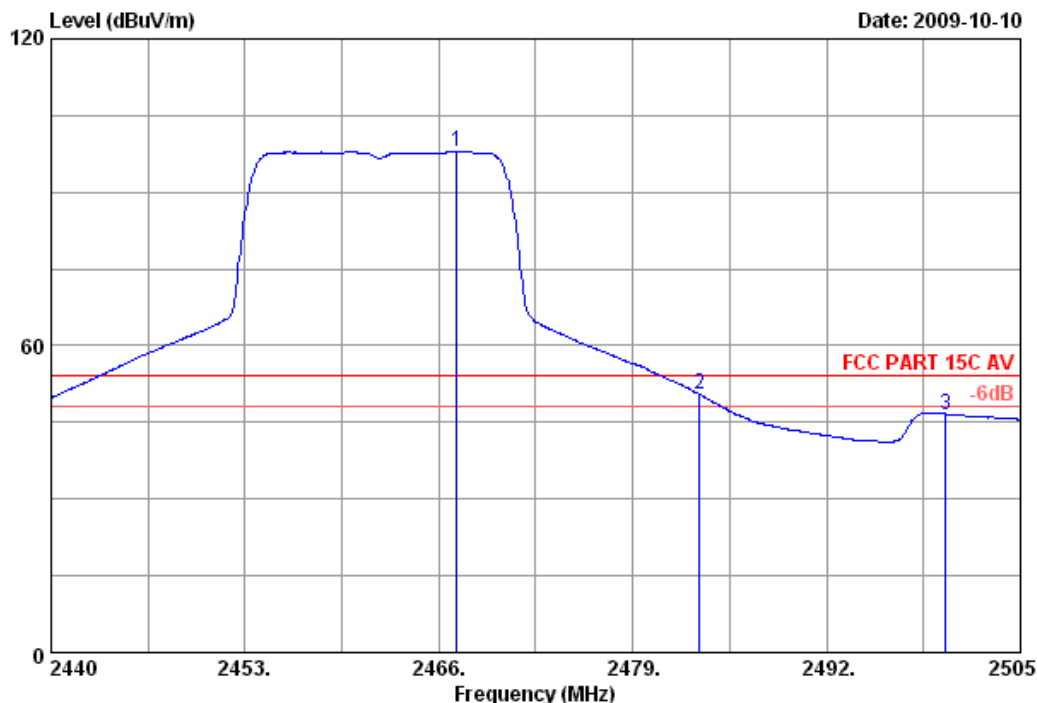

Site no. : 3m Chamber Data no. : 14  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : VERTICAL  
Limit : FCC PART 15C AV  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11g CH11 2462MHz  
M/N : TL-WN722N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dbuv)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2467.170	28.55	8.76	36.02	96.54	97.83	54.00	-43.83	Average
2	2483.500	28.58	8.94	35.97	48.93	50.48	54.00	3.52	Average
3	2500.000	28.60	8.89	36.00	45.11	46.60	54.00	7.40	Average

Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.





No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 15 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

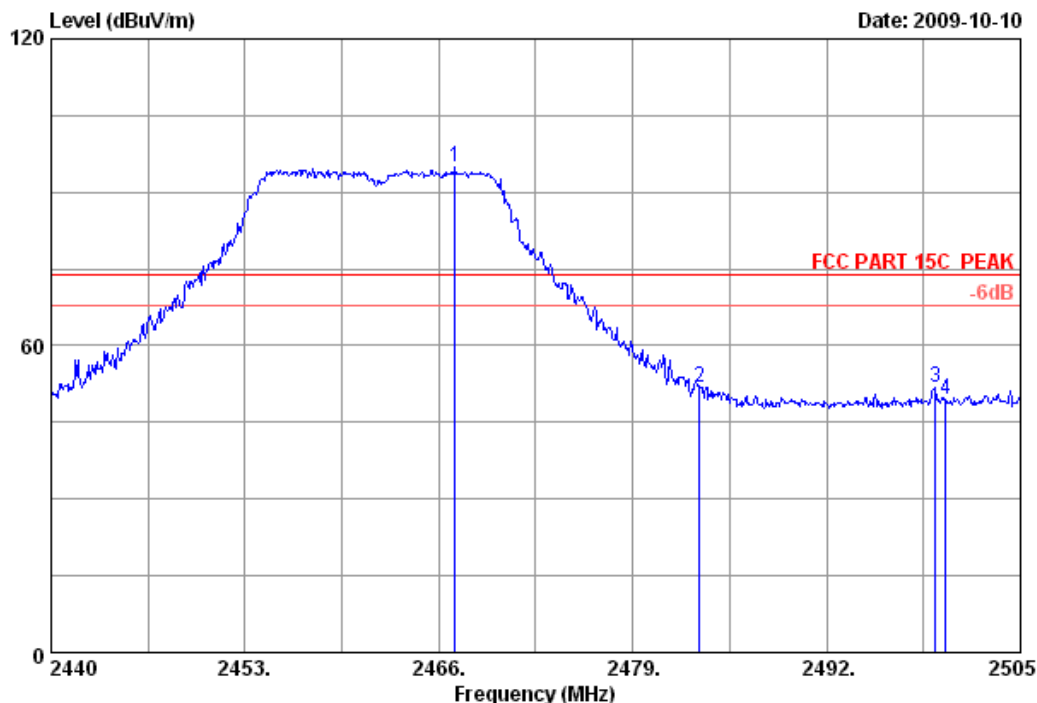

Site no. : 3m Chamber Data no. : 15  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11g CH11 2462MHz  
M/N : TL-WN722N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dbuv)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2467.105	28.55	8.76	36.02	93.52	94.81	74.00	-20.81	Peak
2	2483.500	28.58	8.94	35.97	50.41	51.96	74.00	22.04	Peak
3	2499.280	28.60	8.89	36.00	50.20	51.69	74.00	22.31	Peak
4	2500.000	28.60	8.89	36.00	47.82	49.31	74.00	24.69	Peak


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 16 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

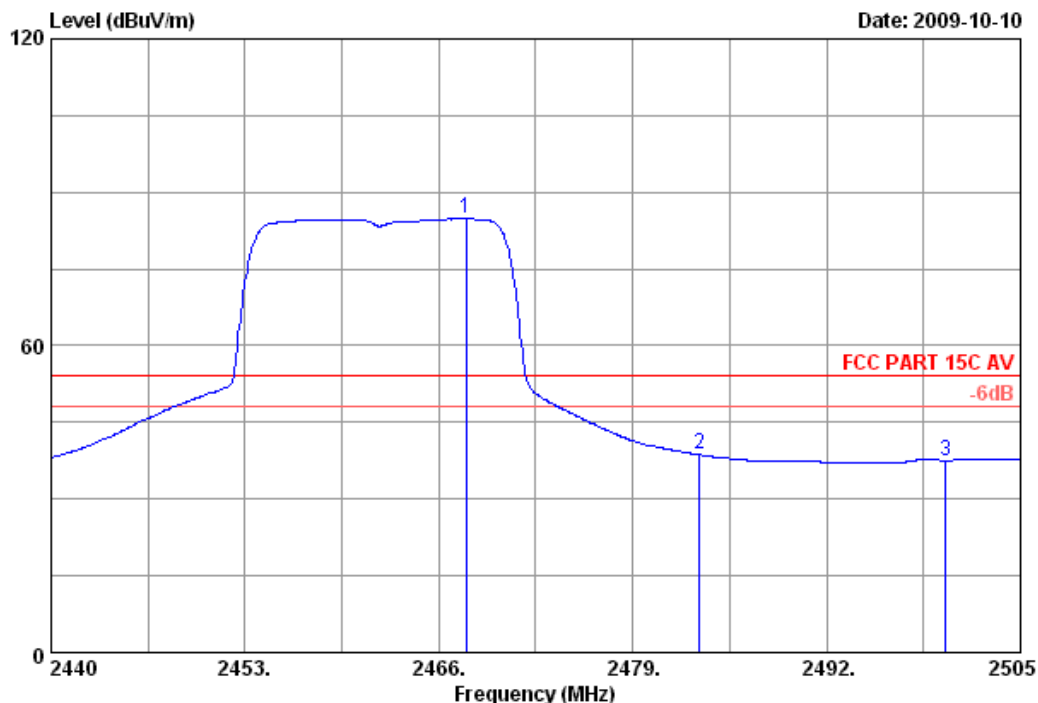

Site no. : 3m Chamber Data no. : 16  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C AV  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11g CH11 2462MHz  
M/N : TL-WN722N

	Freq.	Ant.	Cable	Amp.		Emission			
	(MHz)	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dbuv)	(dBuV/m)	(dBuV/m)	(dB)	
1	2467.820	28.55	8.76	36.02	83.52	84.81	54.00	-30.81	Average
2	2483.500	28.58	8.94	35.97	37.14	38.69	54.00	15.31	Average
3	2500.000	28.60	8.89	36.00	36.09	37.58	54.00	16.42	Average


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 17 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

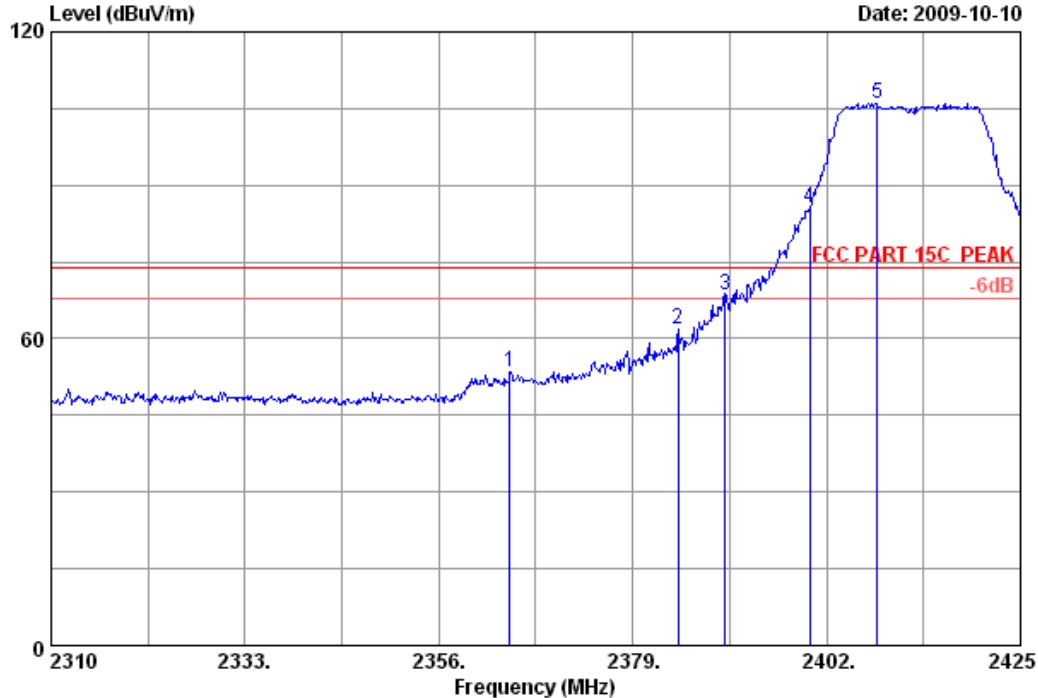

Site no. : 3m Chamber Data no. : 17  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11n HT20 CH1 2412MHz  
M/N : TL-WN722N

		Ant.	Cable	Amp.		Emission			
Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dbuv)	(dBuV/m)	(dBuV/m)	(dB)		
1	2364.395	28.41	8.44	35.91	52.67	53.61	74.00	20.39	Peak
2	2384.405	28.43	8.41	36.00	60.94	61.78	74.00	12.22	Peak
3	2390.000	28.46	8.41	36.09	67.67	68.45	74.00	5.55	Peak
4	2400.000	28.46	8.60	36.09	84.69	85.66	74.00	-11.66	Peak
5	2407.980	28.48	8.60	35.95	104.79	105.92	74.00	-31.92	Peak


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 18 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

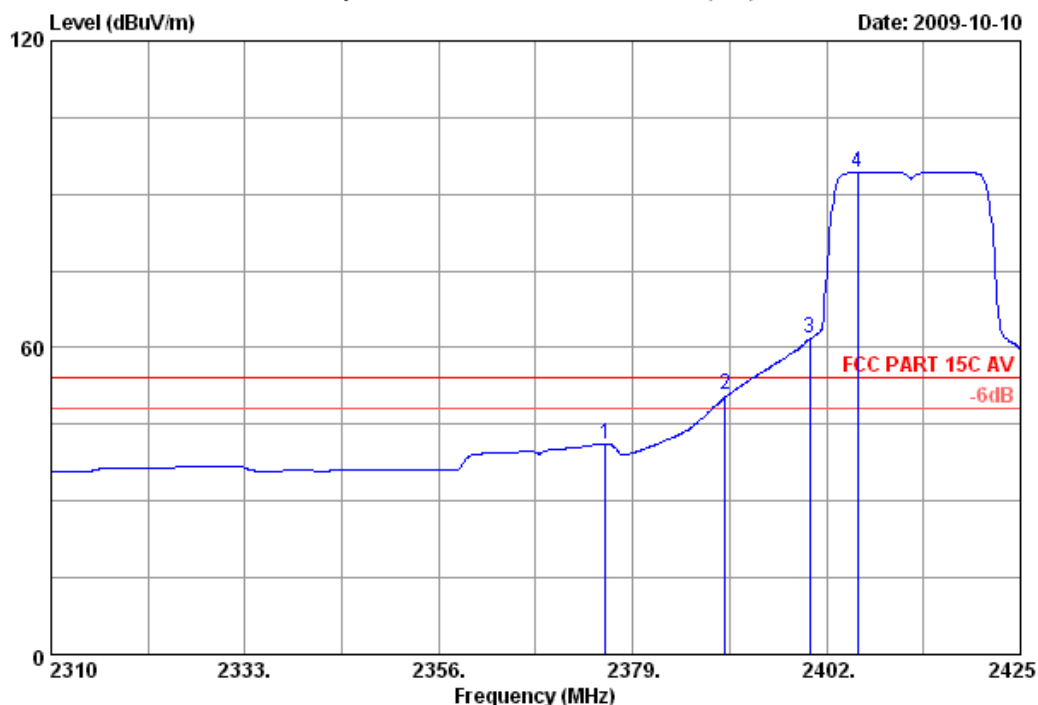

Site no. : 3m Chamber Data no. : 18  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : VERTICAL  
Limit : FCC PART 15C AV  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11n HT20 CH1 2412MHz  
M/N : TL-WN722N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dbuv)	Emission			
						Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2375.780	28.43	8.44	36.00	40.38	41.25	54.00	12.75	Average
2	2390.000	28.46	8.41	36.09	49.98	50.76	54.00	3.24	Average
3	2400.000	28.46	8.60	36.09	60.71	61.68	54.00	-7.68	Average
4	2405.680	28.48	8.60	35.95	93.25	94.38	54.00	-40.38	Average


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 19 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

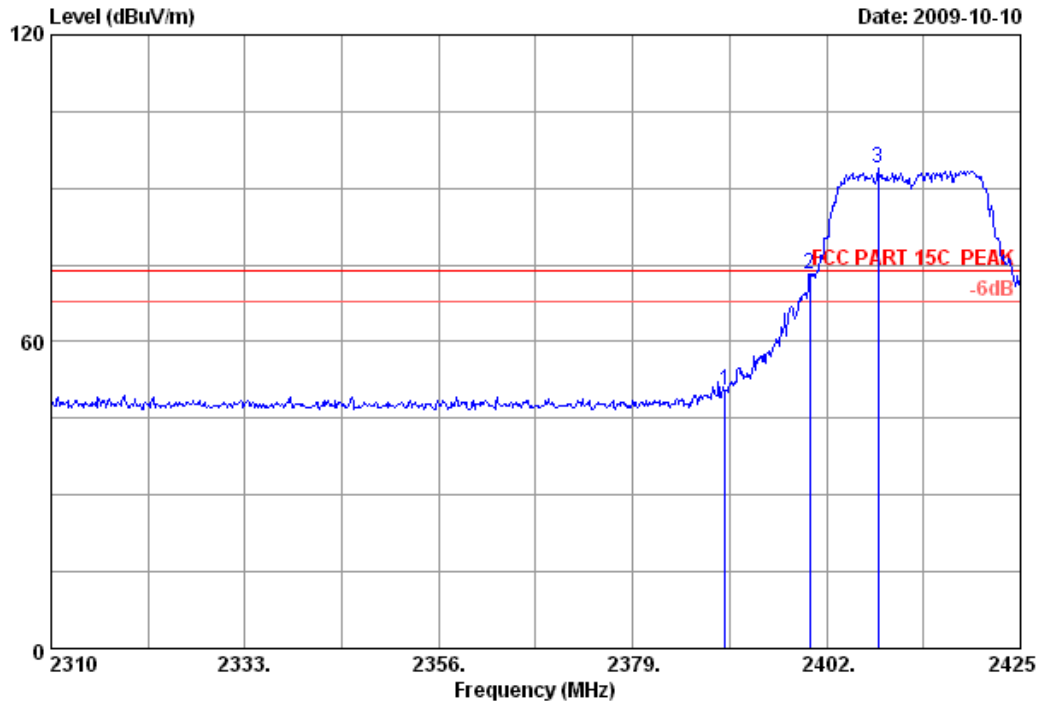

Site no.	: 3m Chamber	Data no.	: 19
Dis. / Ant.	: 3m 3115(0905)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless High Gain USB Adapter		
Power	: DC 5V From PC Input AC 120V/60Hz		
Test mode	: IEEE802.11n HT20 CH1 2412MHz		
M/N	: TL-WN722N		

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dbuv)	Emission			
						Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	28.46	8.41	36.09	49.80	50.58	74.00	23.42	Peak
2	2400.000	28.46	8.60	36.09	72.18	73.15	74.00	0.85	Peak
3	2408.095	28.48	8.60	35.95	92.76	93.89	74.00	-19.89	Peak


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 20 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

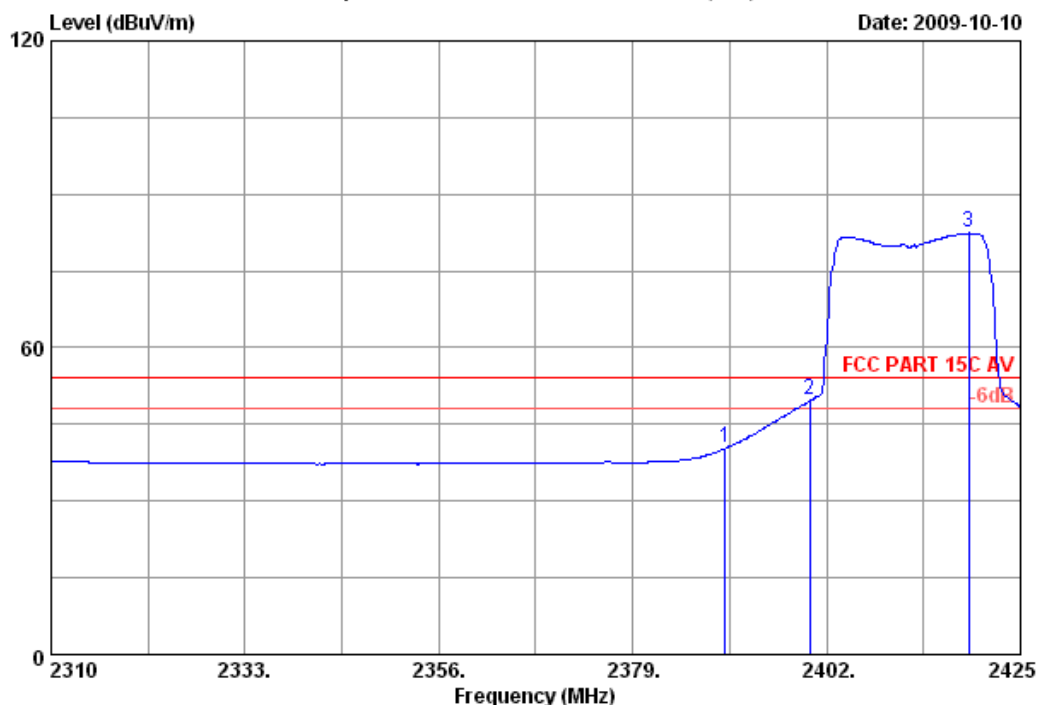

Site no. : 3m Chamber Data no. : 20  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C AV  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11n HT20 CH1 2412MHz  
M/N : TL-WN722N

	Freq.	Ant.	Cable	Amp.		Emission			
	(MHz)	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dbuv)	(dBuV/m)	(dBuV/m)	(dB)	
1	2390.000	28.46	8.41	36.09	39.58	40.36	54.00	13.64	Average
2	2400.000	28.46	8.60	36.09	48.69	49.66	54.00	4.34	Average
3	2418.905	28.48	8.60	35.95	81.27	82.40	54.00	-28.40	Average


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 21 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

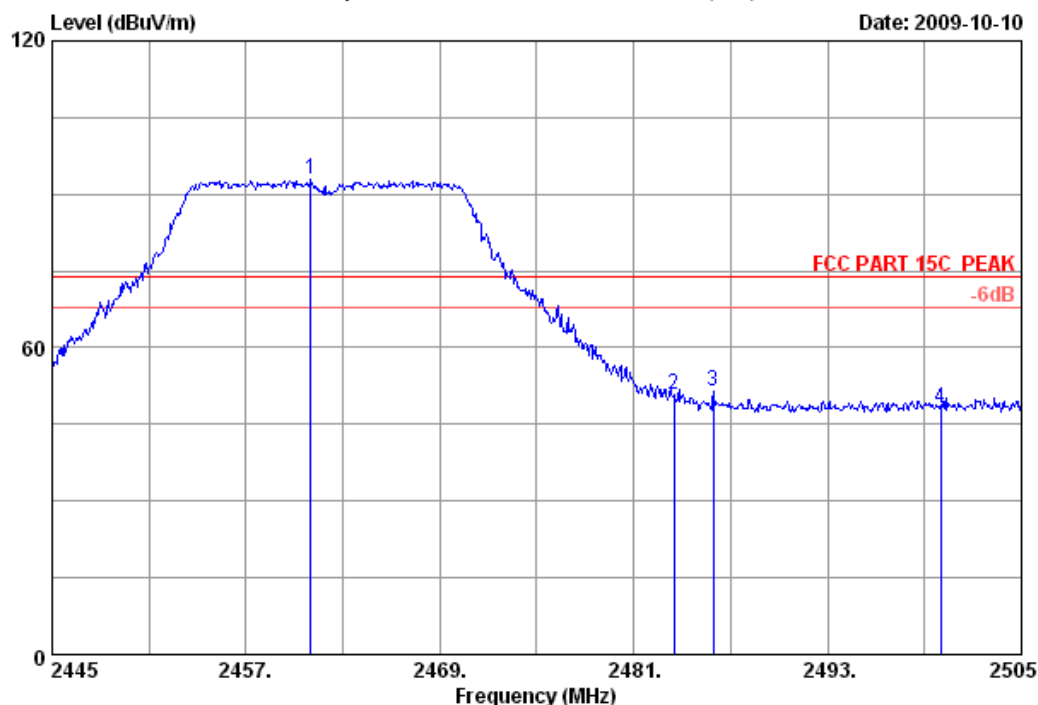

Site no. : 3m Chamber Data no. : 21  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11n HT20 CH11 2462MHz  
M/N : TL-WN722N

		Ant.	Cable	Amp.		Emission			
Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dbuv)	(dBuV/m)	(dBuV/m)	(dB)		
1	2461.020	28.55	8.76	36.02	91.52	92.81	74.00	-18.81	Peak
2	2483.500	28.58	8.94	35.97	49.16	50.71	74.00	23.29	Peak
3	2485.920	28.58	8.94	35.97	50.07	51.62	74.00	22.38	Peak
4	2500.000	28.60	8.89	36.00	46.63	48.12	74.00	25.88	Peak


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 22 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

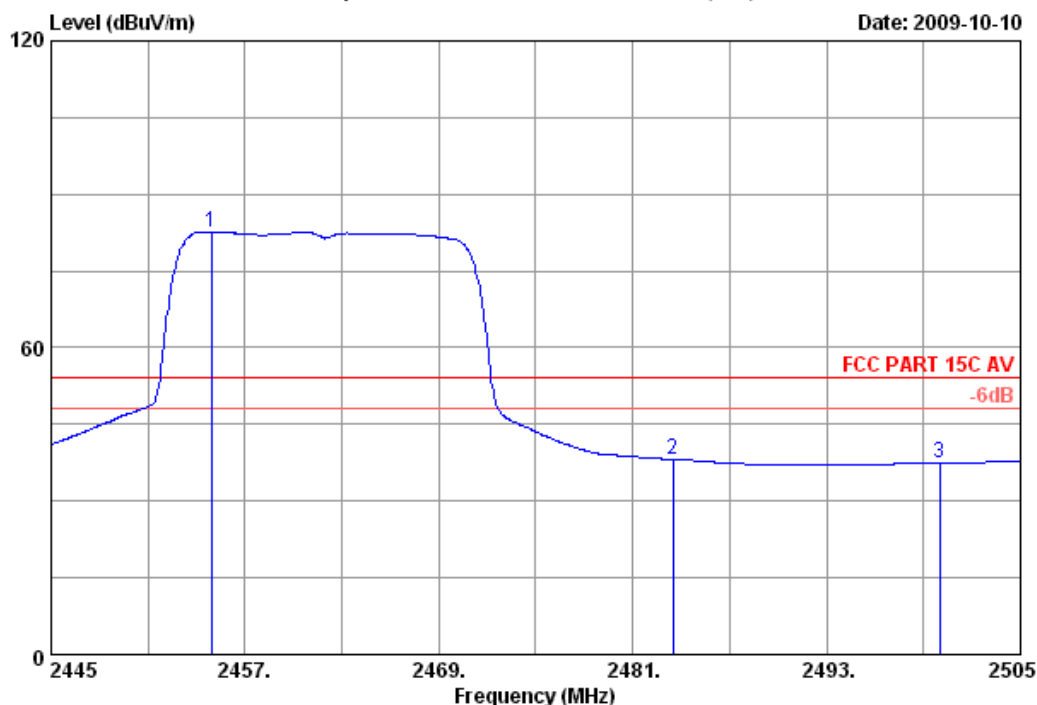

Site no. : 3m Chamber Data no. : 22  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C AV  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11n HT20 CH11 2462MHz  
M/N : TL-WN722N

	Freq.	Ant.	Cable	Amp.		Emission			
	(MHz)	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dbuv)	(dBuV/m)	(dBuV/m)	(dB)	
1	2454.900	28.55	8.48	36.02	81.62	82.63	54.00	-28.63	Average
2	2483.500	28.58	8.94	35.97	36.58	38.13	54.00	15.87	Average
3	2500.000	28.60	8.89	36.00	35.99	37.48	54.00	16.52	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.






No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 23

File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

Date: 2009-10-10

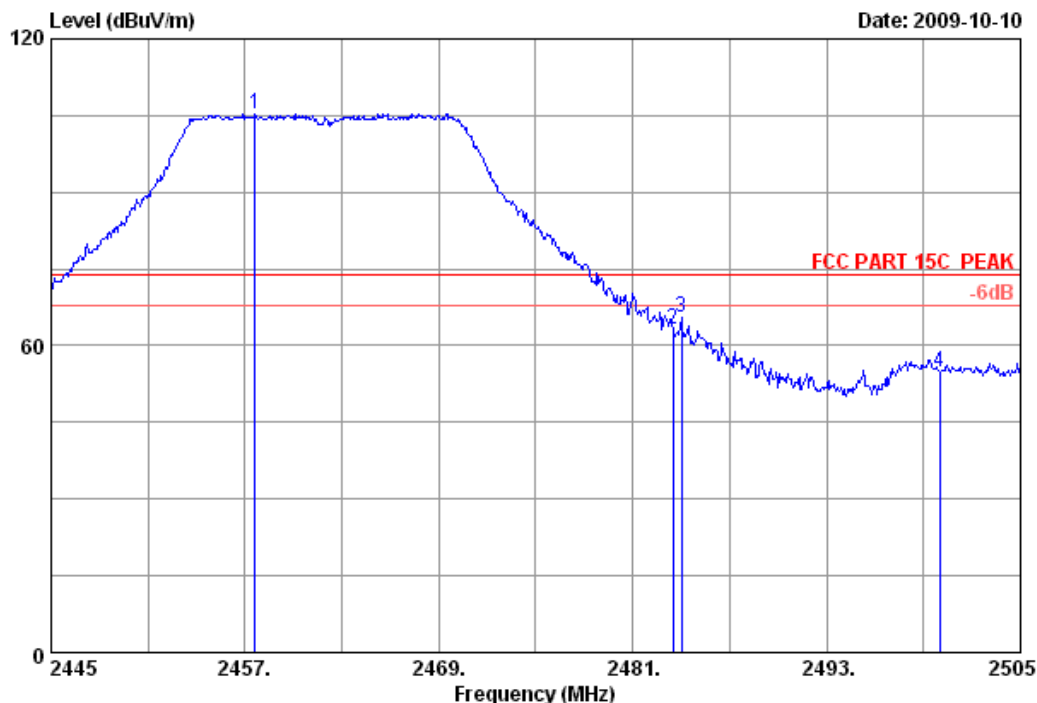

Site no. : 3m Chamber Data no. : 23  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11n HT20 CH11 2462MHz  
M/N : TL-WN722N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dbuv)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2457.600	28.55	8.48	36.02	104.38	105.39	74.00	-31.39	Peak
2	2483.500	28.58	8.94	35.97	61.75	63.30	74.00	10.70	Peak
3	2484.000	28.58	8.94	35.97	64.11	65.66	74.00	8.34	Peak
4	2500.000	28.60	8.89	36.00	53.40	54.89	74.00	19.11	Peak


## Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 24 File: E:\2009 report data\TP-LINK\TL-WN722N.EM6 (104)

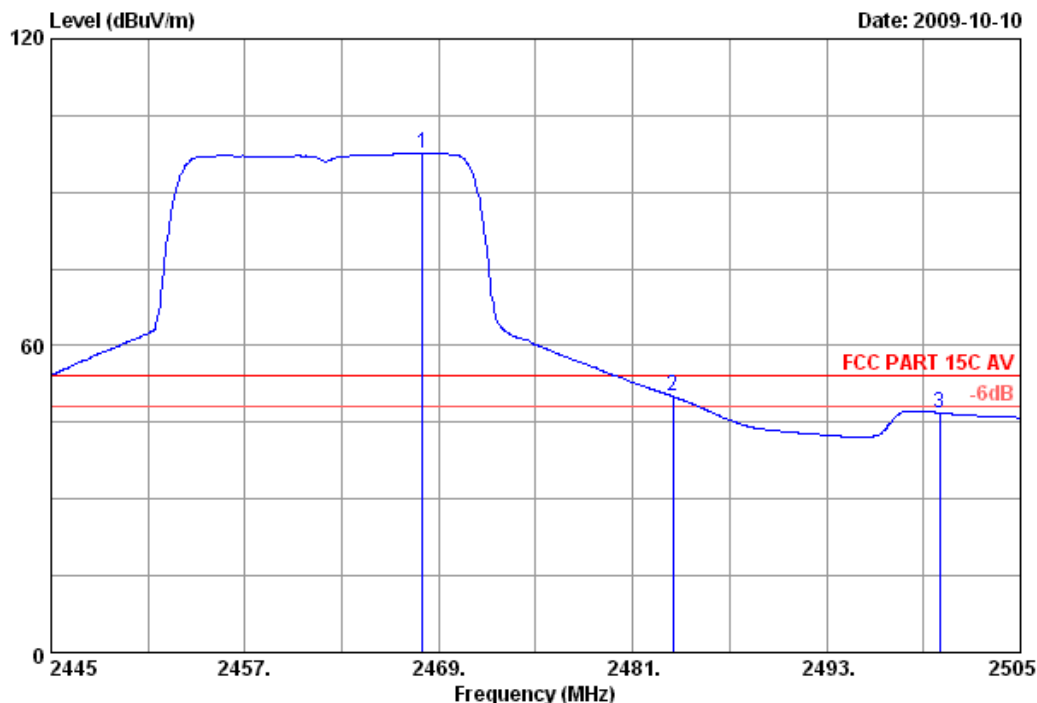

Site no.	: 3m Chamber	Data no.	: 24
Dis. / Ant.	: 3m 3115(0905)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C AV		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless High Gain USB Adapter		
Power	: DC 5V From PC Input AC 120V/60Hz		
Test mode	: IEEE802.11n HT20 CH11 2462MHz		
M/N	: TL-WN722N		

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dbuv)	Emission			
						Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2467.980	28.55	8.76	36.02	96.28	97.57	54.00	-43.57	Average
2	2483.500	28.58	8.94	35.97	48.53	50.08	54.00	3.92	Average
3	2500.000	28.60	8.89	36.00	45.34	46.83	54.00	7.17	Average


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 25 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

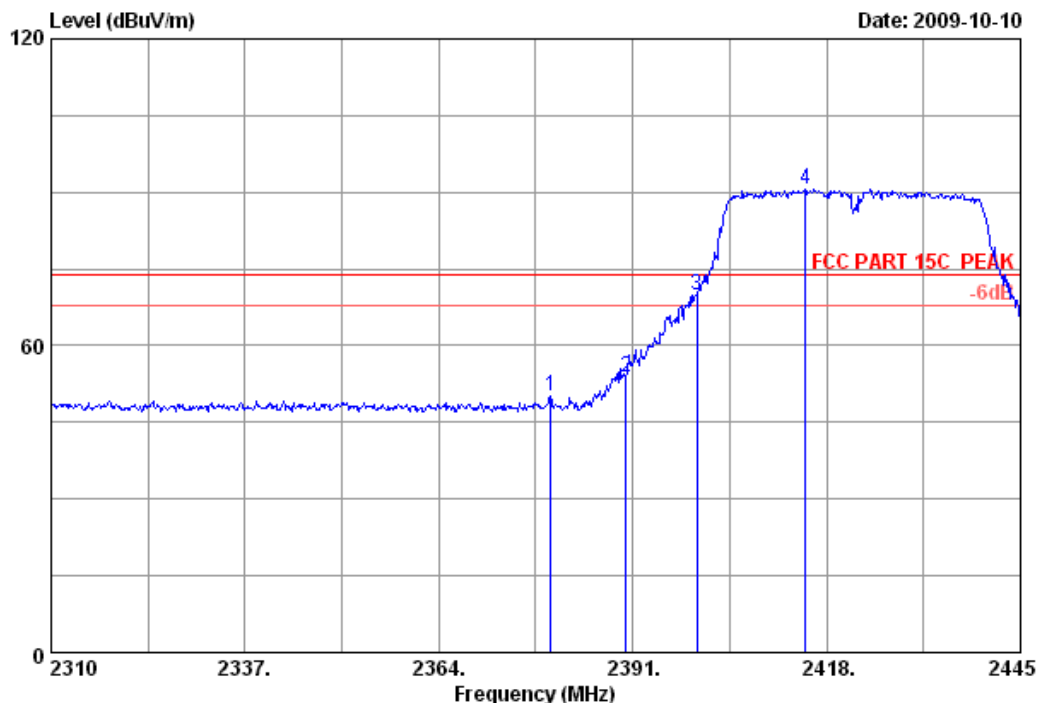

Site no. : 3m Chamber Data no. : 25  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11n HT40 CH1 2422MHz  
M/N : TL-WN722N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dbuv)	Emission			
						Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2379.525	28.43	8.41	36.00	49.45	50.29	74.00	23.71	Peak
2	2390.000	28.46	8.41	36.09	53.07	53.85	74.00	20.15	Peak
3	2400.000	28.46	8.60	36.09	68.99	69.96	74.00	4.04	Peak
4	2415.030	28.48	8.60	35.95	89.59	90.72	74.00	-16.72	Peak


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 26 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

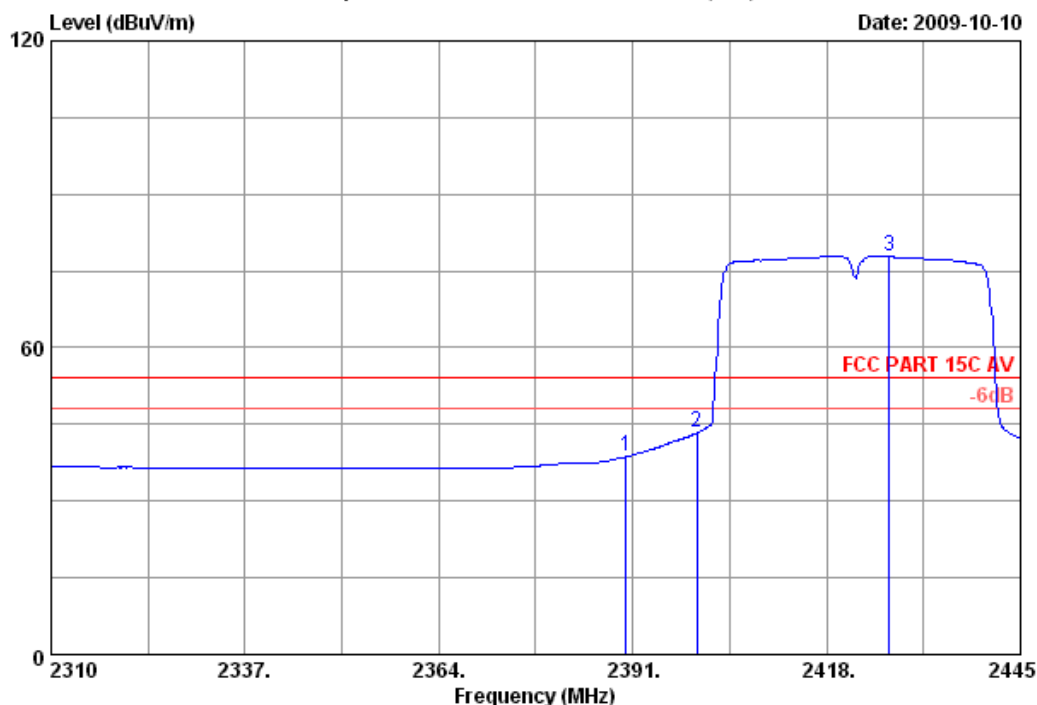

Site no. : 3m Chamber Data no. : 26  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C AV  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11n HT40 CH1 2422MHz  
M/N : TL-WN722N

	Freq.	Ant.	Cable	Amp.		Emission			
	(MHz)	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dbuv)	(dBuV/m)	(dBuV/m)	(dB)	
1	2390.000	28.46	8.41	36.09	37.89	38.67	54.00	15.33	Average
2	2400.000	28.46	8.60	36.09	42.45	43.42	54.00	10.58	Average
3	2426.775	28.50	8.60	36.01	76.85	77.94	54.00	-23.94	Average


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 27 File: E:\2009 report data\TP-LINK\TL-WN722N.EM6 (104)

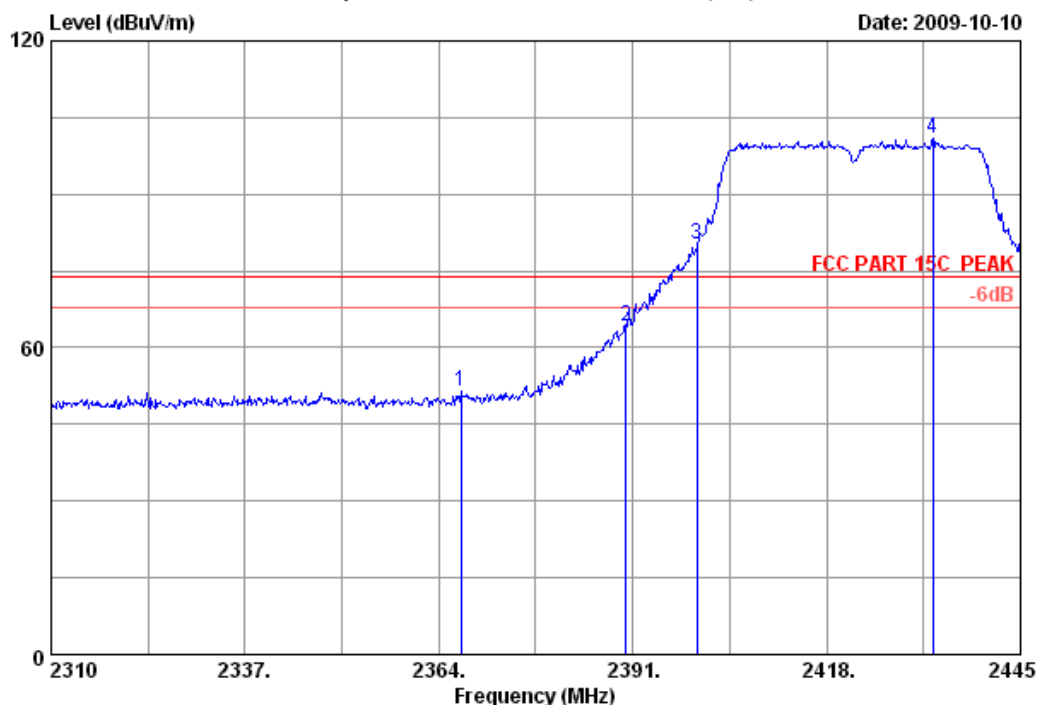

Site no. : 3m Chamber Data no. : 27  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11n HT40 CH1 2422MHz  
M/N : TL-WN722N

		Ant.	Cable	Amp.		Emission			
Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dbuv)	(dBuV/m)	(dBuV/m)	(dB)		
1	2367.105	28.41	8.44	35.91	50.69	51.63	74.00	22.37	Peak
2	2390.000	28.46	8.41	36.09	63.26	64.04	74.00	9.96	Peak
3	2400.000	28.46	8.60	36.09	79.18	80.15	74.00	-6.15	Peak
4	2432.850	28.50	8.60	36.01	99.75	100.84	74.00	-26.84	Peak


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 28 File: E:\2009 report data\T\TP-LINK\TL-WN722N.EM6 (104)

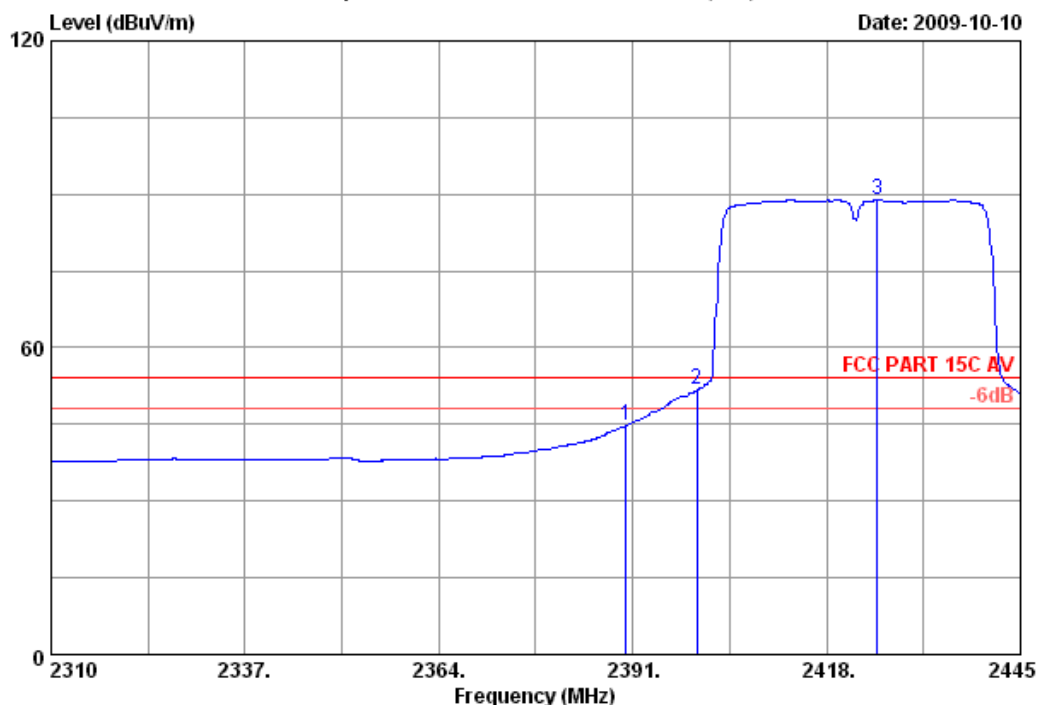

Site no. : 3m Chamber Data no. : 28  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : VERTICAL  
Limit : FCC PART 15C AV  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11n HT40 CH1 2422MHz  
M/N : TL-WN722N

	Freq.	Ant.	Cable	Amp.		Emission			
	(MHz)	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dbuv)	(dBuV/m)	(dBuV/m)	(dB)	
1	2390.000	28.46	8.41	36.09	44.03	44.81	54.00	9.19	Average
2	2400.000	28.46	8.60	36.09	50.70	51.67	54.00	2.33	Average
3	2425.020	28.50	8.60	36.01	87.99	89.08	54.00	-35.08	Average


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 29 File: E:\2009 report data\TP-LINK\TL-WN722N.EM6 (104)

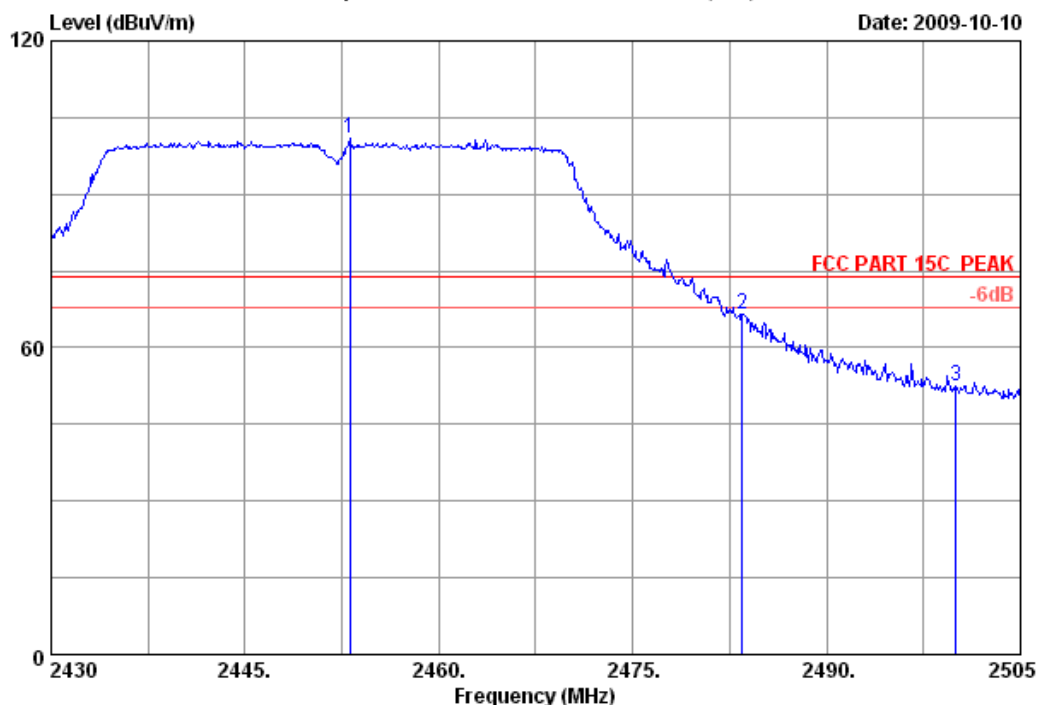

Site no. : 3m Chamber Data no. : 29  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11n HT40 CH7 2452MHz  
M/N : TL-WN722N

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dbuv)	(dBuV/m)	(dBuV/m)	(dB)	
1	2453.100	28.53	8.48	36.06	99.88	100.83	74.00	-26.83	Peak
2	2483.500	28.58	8.94	35.97	65.03	66.58	74.00	7.42	Peak
3	2500.000	28.60	8.89	36.00	50.98	52.47	74.00	21.53	Peak


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 30 File: E:\2009 report data\TP-LINK\TL-WN722N.EM6 (104)

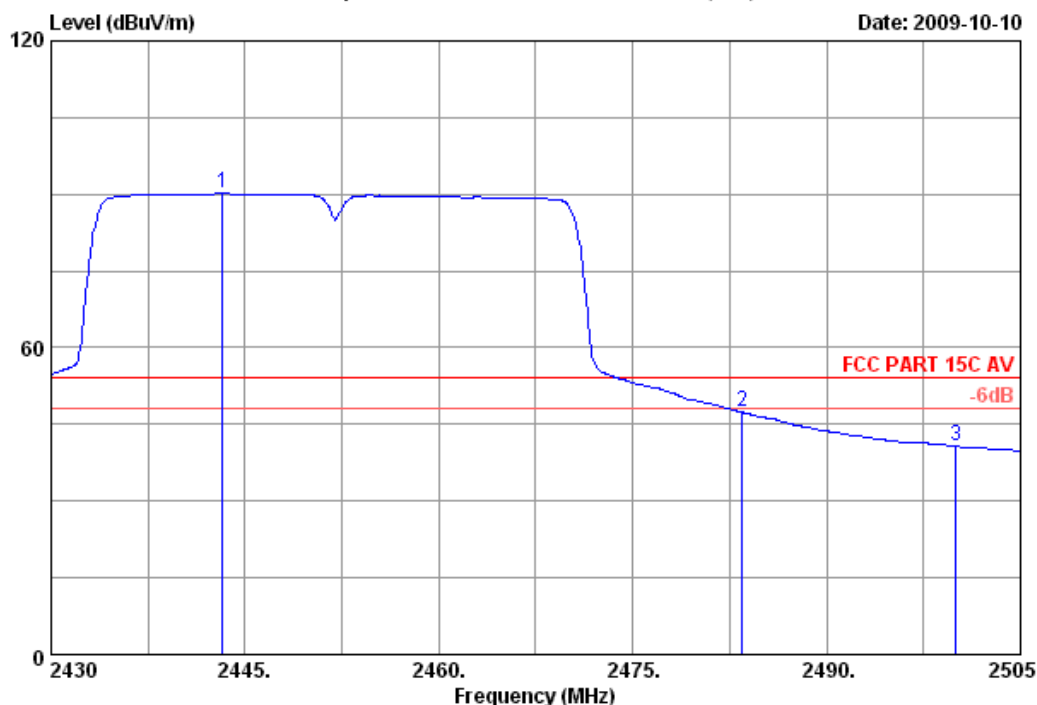

Site no. : 3m Chamber Data no. : 30  
Dis. / Ant. : 3m 3115(0905) Ant. pol. : VERTICAL  
Limit : FCC PART 15C AV  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 150Mbps Wireless High Gain USB Adapter  
Power : DC 5V From PC Input AC 120V/60Hz  
Test mode : IEEE802.11n HT40 CH7 2452MHz  
M/N : TL-WN722N

		Ant.	Cable	Amp.		Emission			
	Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dbuv)	(dBuV/m)	(dBuV/m)	(dB)	
1	2443.275	28.53	8.48	36.06	89.22	90.17	54.00	-36.17	Average
2	2483.500	28.58	8.94	35.97	45.79	47.34	54.00	6.66	Average
3	2500.000	28.60	8.89	36.00	39.23	40.72	54.00	13.28	Average

Remarks:


1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.





No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 31 File: E:\2009 report data\TP-LINK\TL-WN722N.EM6 (104)

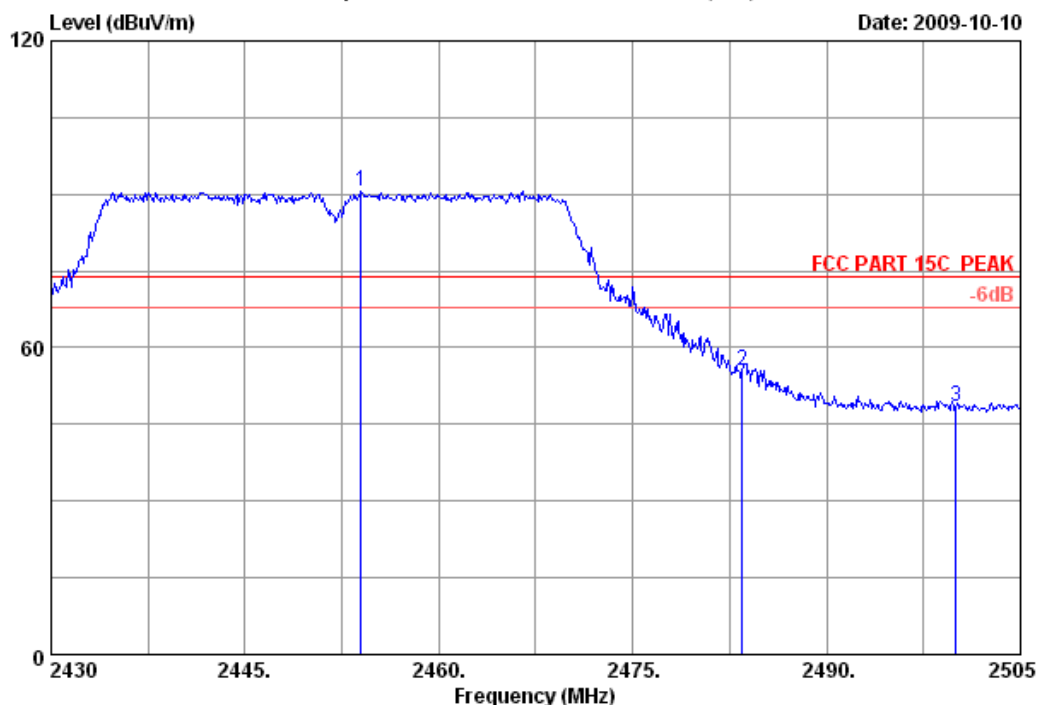

Site no.	: 3m Chamber	Data no.	: 31
Dis. / Ant.	: 3m 3115(0905)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless High Gain USB Adapter		
Power	: DC 5V From PC Input AC 120V/60Hz		
Test mode	: IEEE802.11n HT40 CH7 2452MHz		
M/N	: TL-WN722N		

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dbuv)	Emission			
						Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2454.000	28.55	8.48	36.02	89.47	90.48	74.00	-16.48	Peak
2	2483.500	28.58	8.94	35.97	53.99	55.54	74.00	18.46	Peak
3	2500.000	28.60	8.89	36.00	46.88	48.37	74.00	25.63	Peak


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 32 File: E:\2009 report data\TP-LINK\TL-WN722N.EM6 (104)

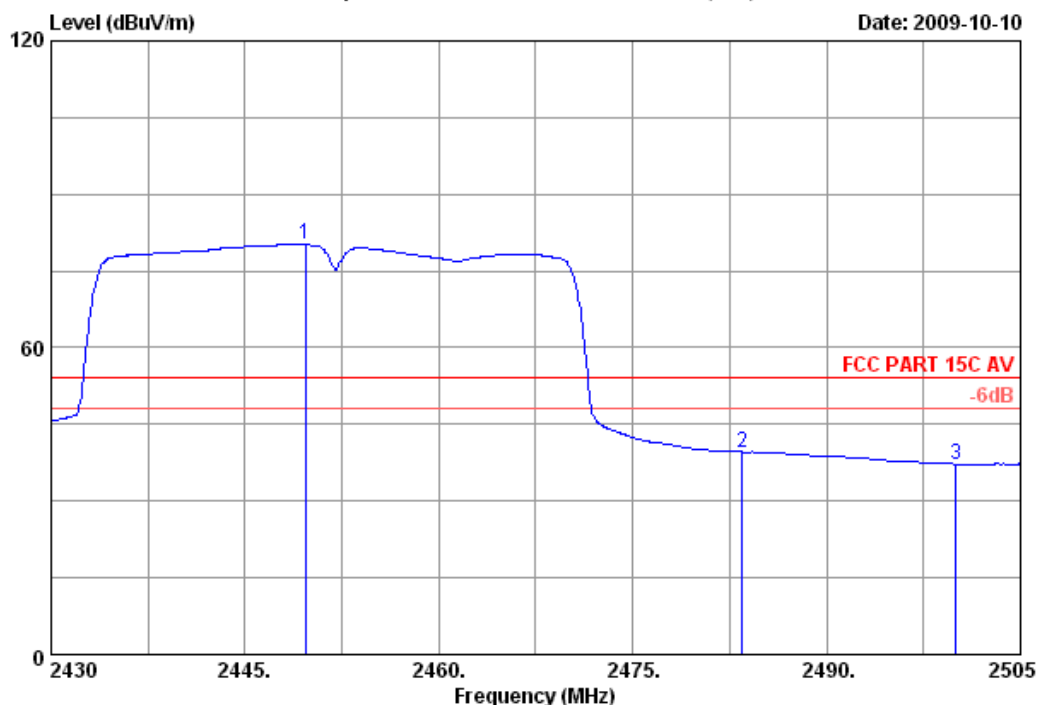

Site no.	: 3m Chamber	Data no.	: 32
Dis. / Ant.	: 3m 3115(0905)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C AV		
Env. / Ins.	: 23°C/54%	Engineer	: Sunny-lu
EUT	: 150Mbps Wireless High Gain USB Adapter		
Power	: DC 5V From PC Input AC 120V/60Hz		
Test mode	: IEEE802.11n HT40 CH7 2452MHz		
M/N	: TL-WN722N		

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dbuv)	Emission			
						Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2449.650	28.53	8.48	36.06	79.23	80.18	54.00	-26.18	Average
2	2483.500	28.58	8.94	35.97	38.05	39.60	54.00	14.40	Average
3	2500.000	28.60	8.89	36.00	35.77	37.26	54.00	16.74	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

## 7. 6dB Bandwidth Test

### 7.1.Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	E4446A	US44300459	May.08, 09	1 Year
2.	Attenuator	Agilent	8491B	MY39262165	May.08, 09	1 Year
3.	RF Cable	Hubersuhner	SUCOFLEX 102	28618/2	May.08, 09	1 Year

### 7.2.Limit

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

### 7.3.Test Procedure

The transmitter output was connected to a spectrum analyzer, The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100 kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

### 7.4.Test Results

Test Mode: IEEE 802.11b TX

CH	6dB Bandwidth (MHz)	Limit	Conclusion
1	13.00	>500	<b>PASS</b>
6	13.00	>500	<b>PASS</b>
11	13.00	>500	<b>PASS</b>

Test Mode: IEEE 802.11g TX

CH	6dB Bandwidth (MHz)	Limit	Conclusion
1	16.50	>500	<b>PASS</b>
6	16.50	>500	<b>PASS</b>
11	16.50	>500	<b>PASS</b>

Test Mode: IEEE 802.11n HT20 TX


CH	6dB Bandwidth (MHz)	Limit	Conclusion
1	17.67	>500	<b>PASS</b>
6	17.67	>500	<b>PASS</b>
11	17.67	>500	<b>PASS</b>

Test Mode: IEEE 802.11n HT40 TX


CH	6dB Bandwidth (MHz)	Limit	Conclusion
1	36.12	>500	<b>PASS</b>
4	36.48	>500	<b>PASS</b>
7	36.30	>500	<b>PASS</b>

Test Mode: IEEE 802.11b TX


Test CH1: 2412MHz

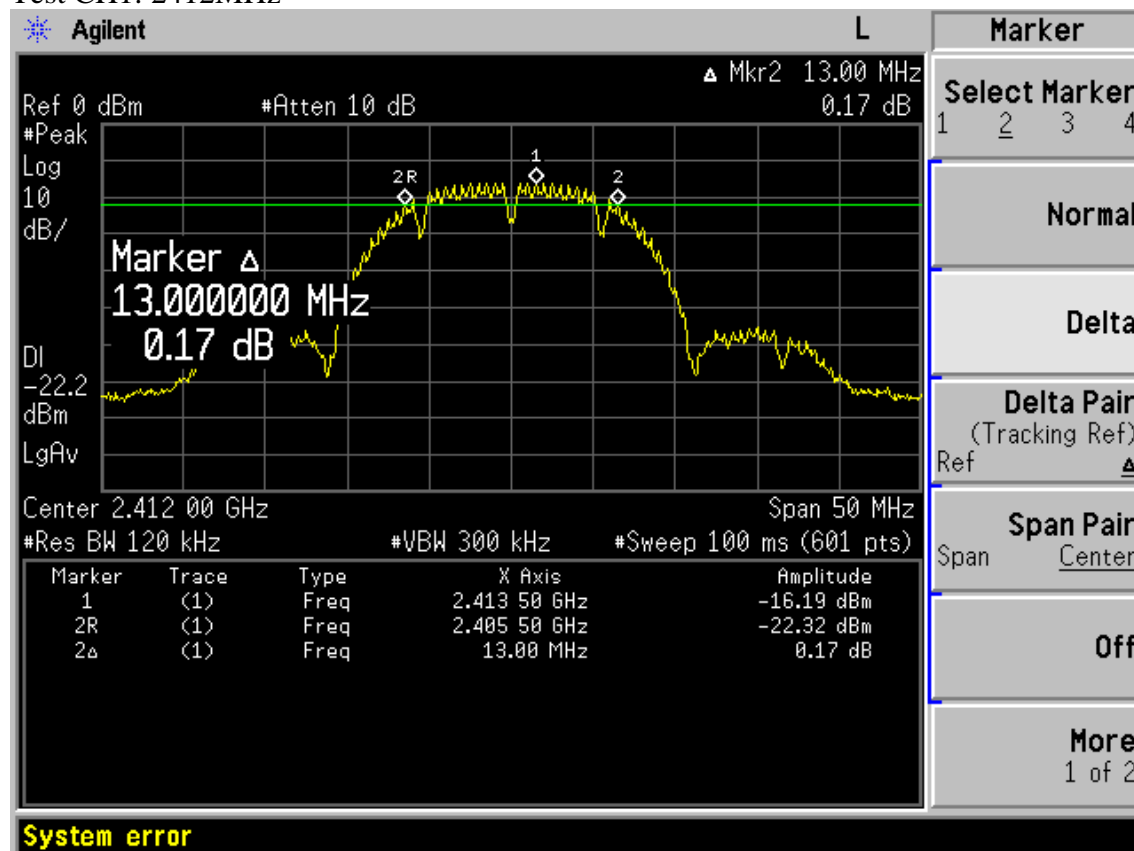

Test CH6: 2437MHz

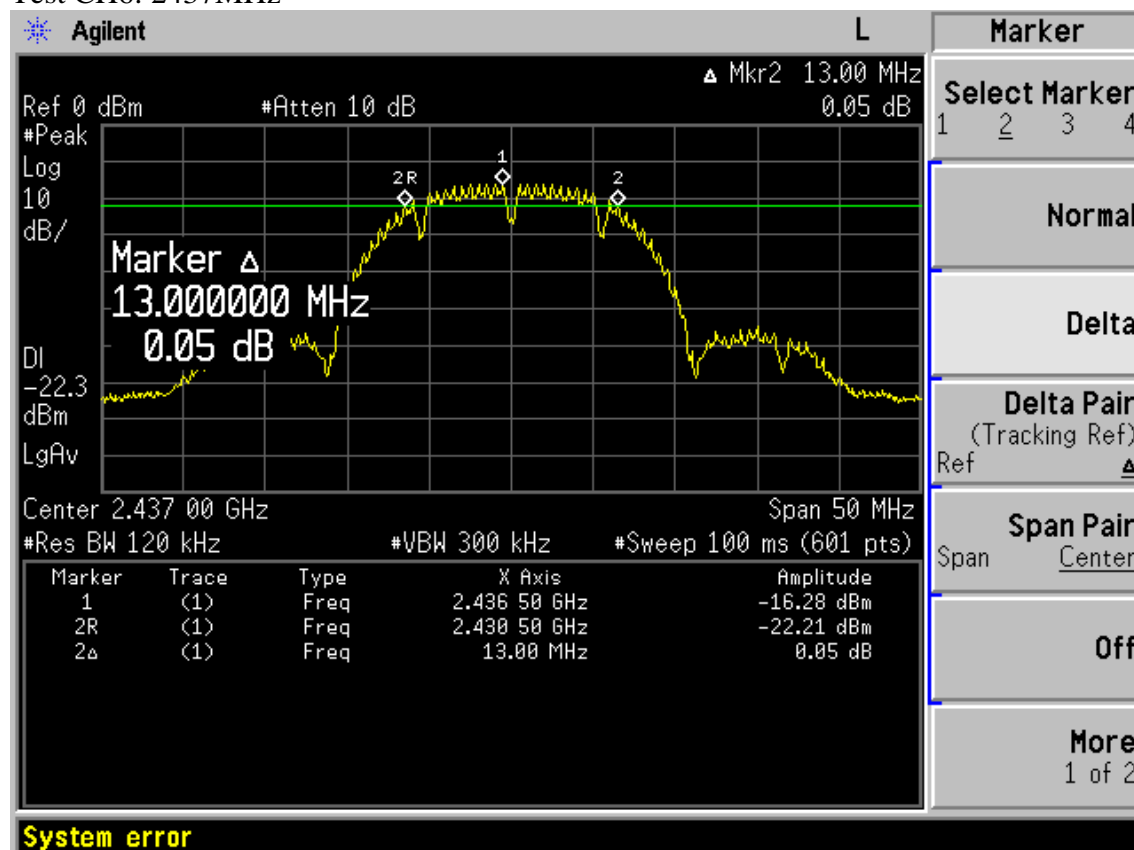


Test CH1: 2462MHz

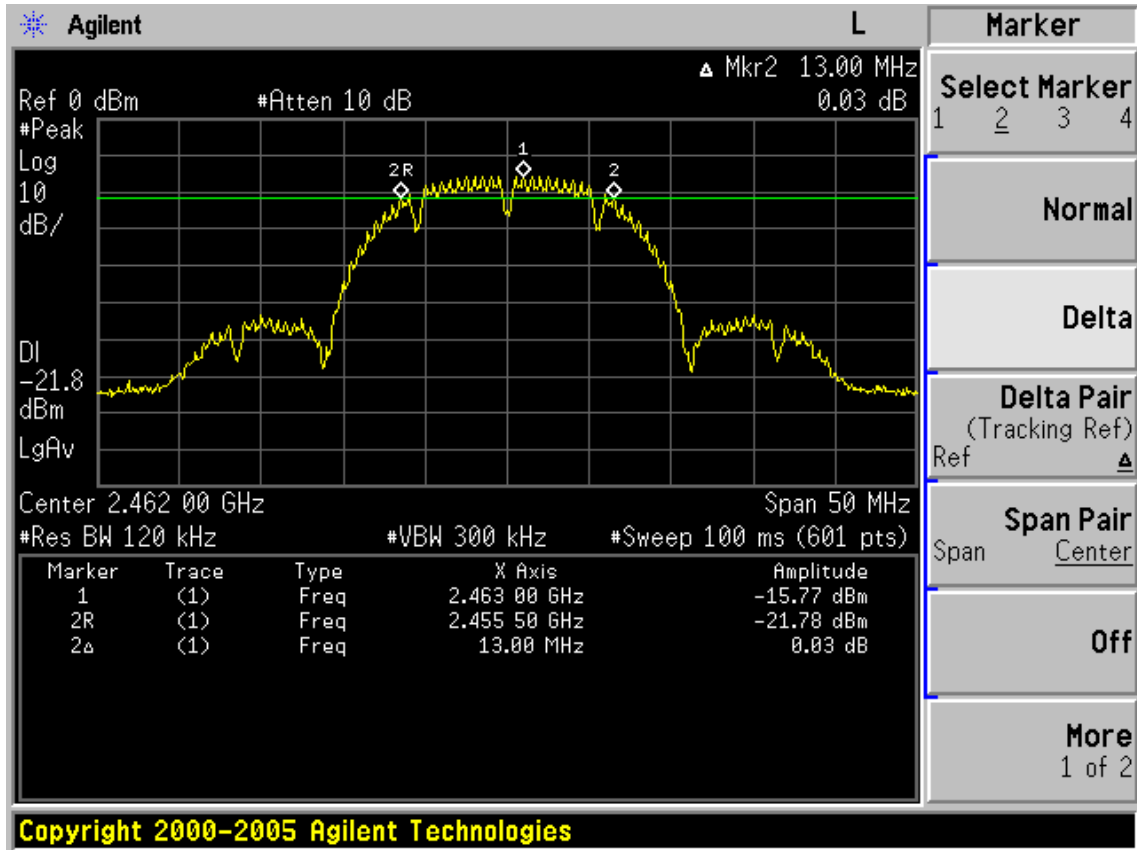


Test Mode: IEEE 802.11g TX


Test CH1: 2412MHz

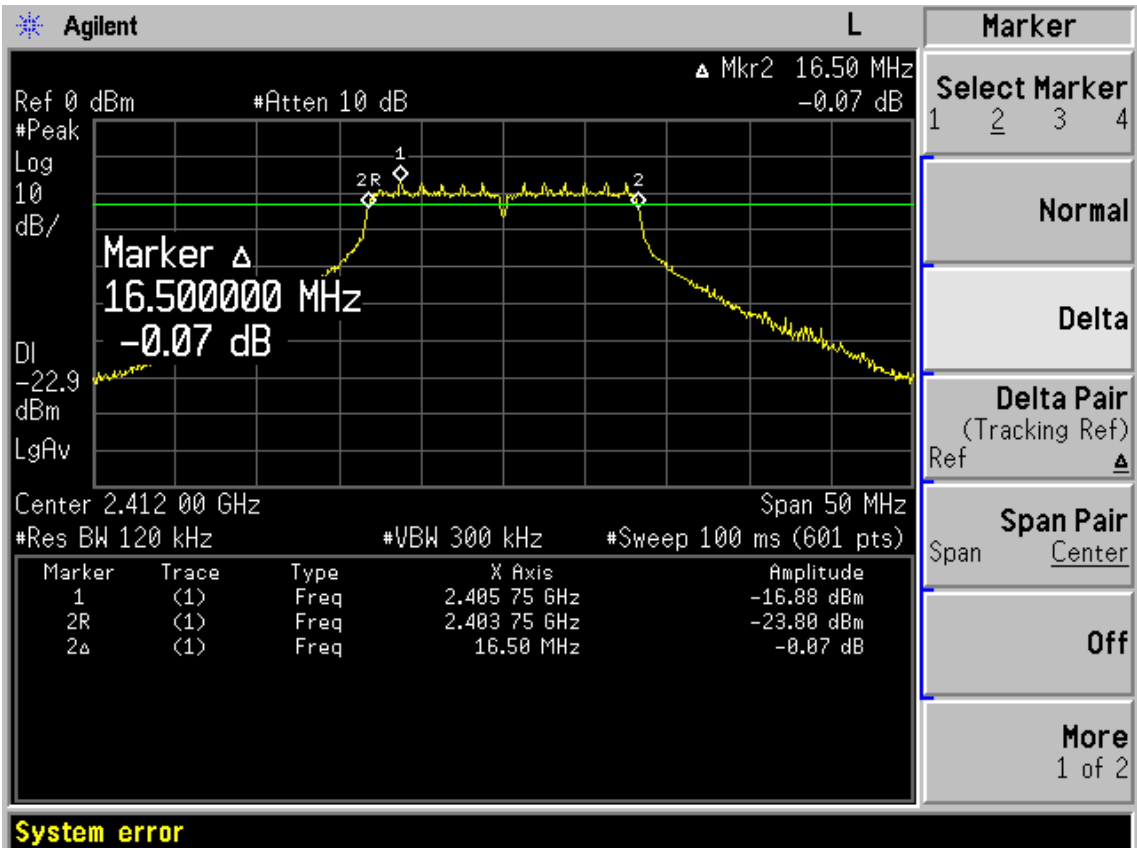

Test CH6: 2437MHz

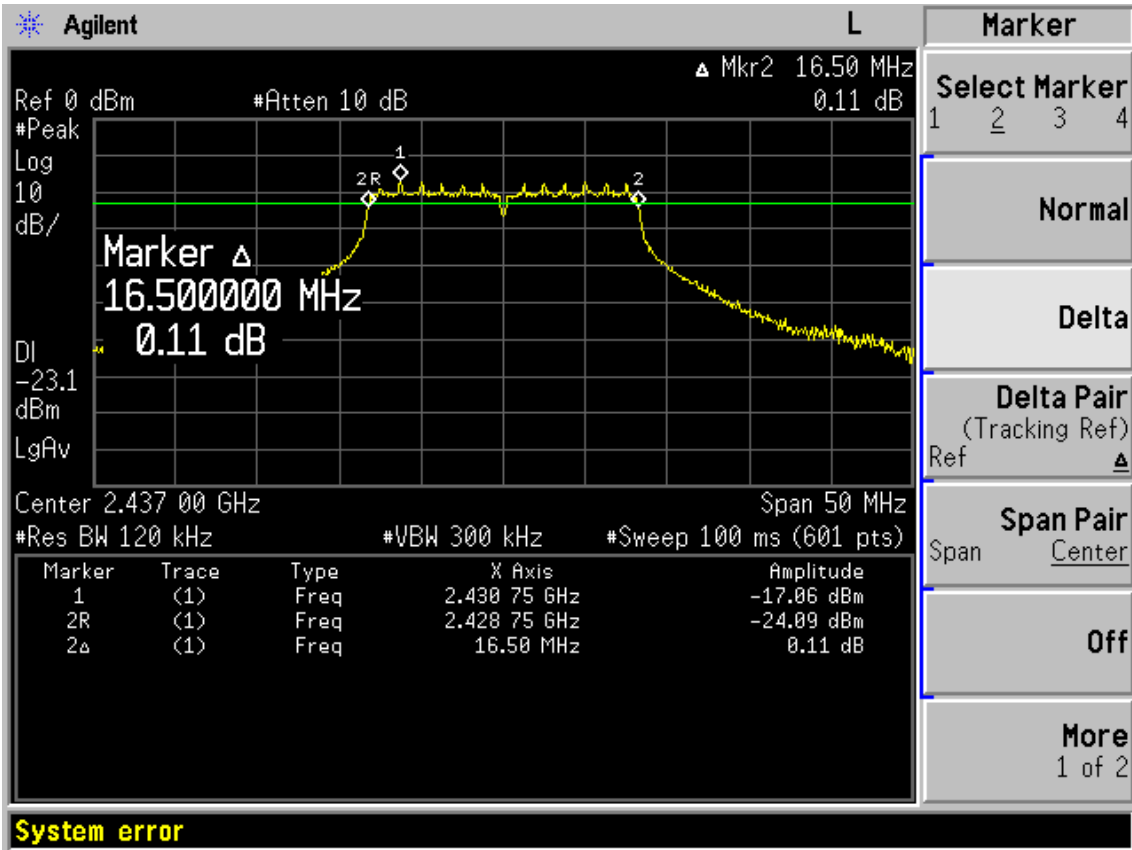


Test CH11: 2462MHz

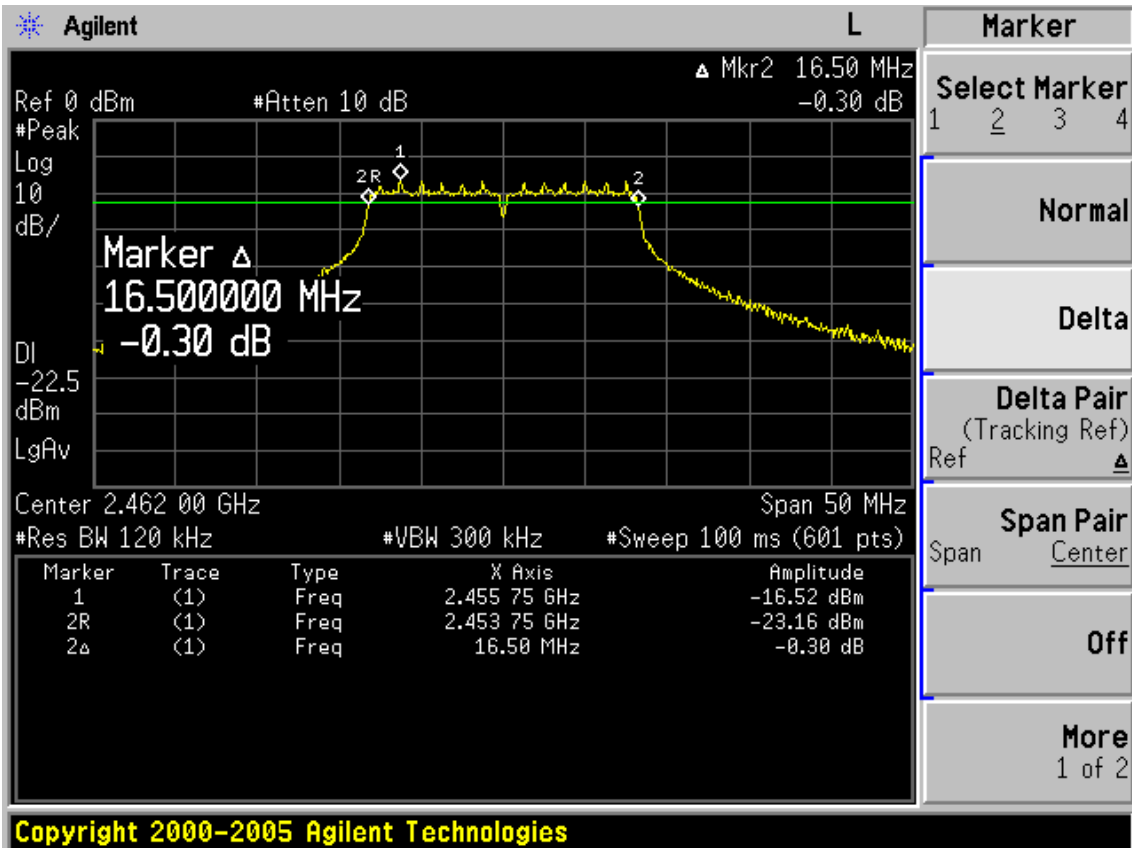


Test Mode: IEEE 802.11n HT20 TX


Test CH1: 2412MHz

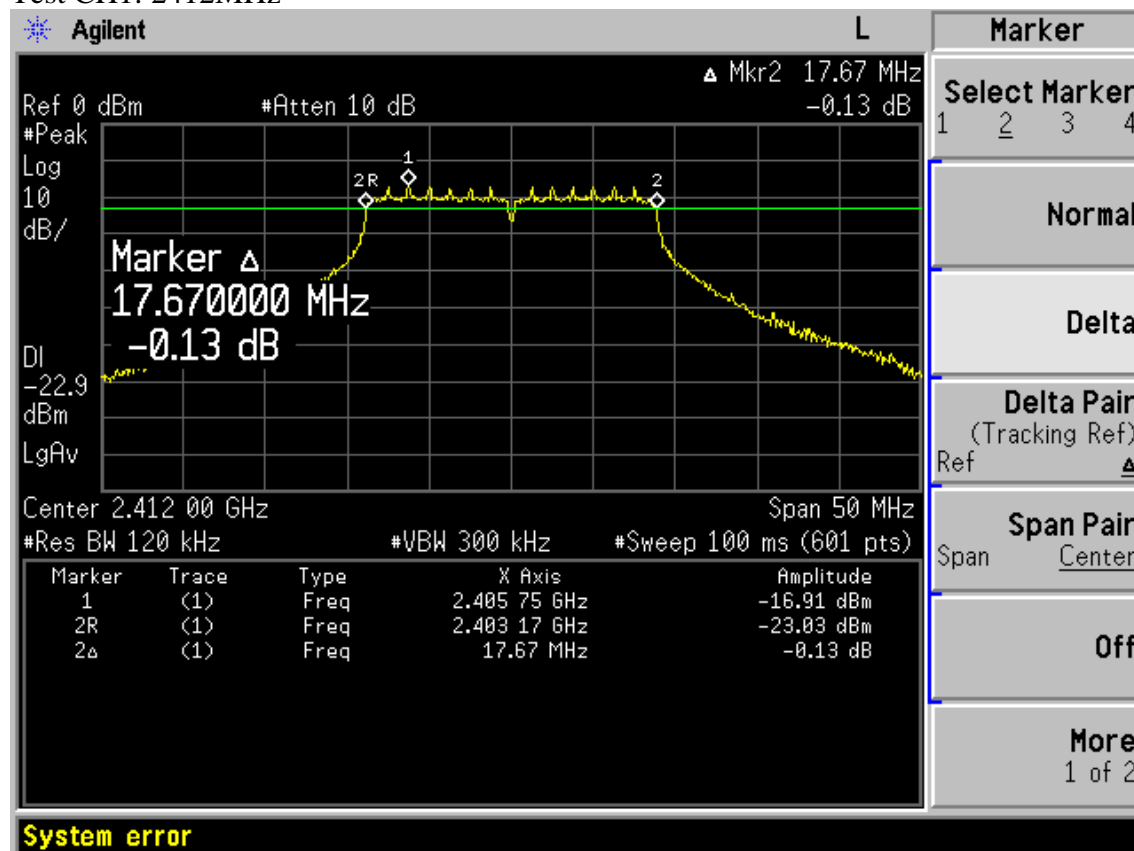

Test CH6: 2437MHz

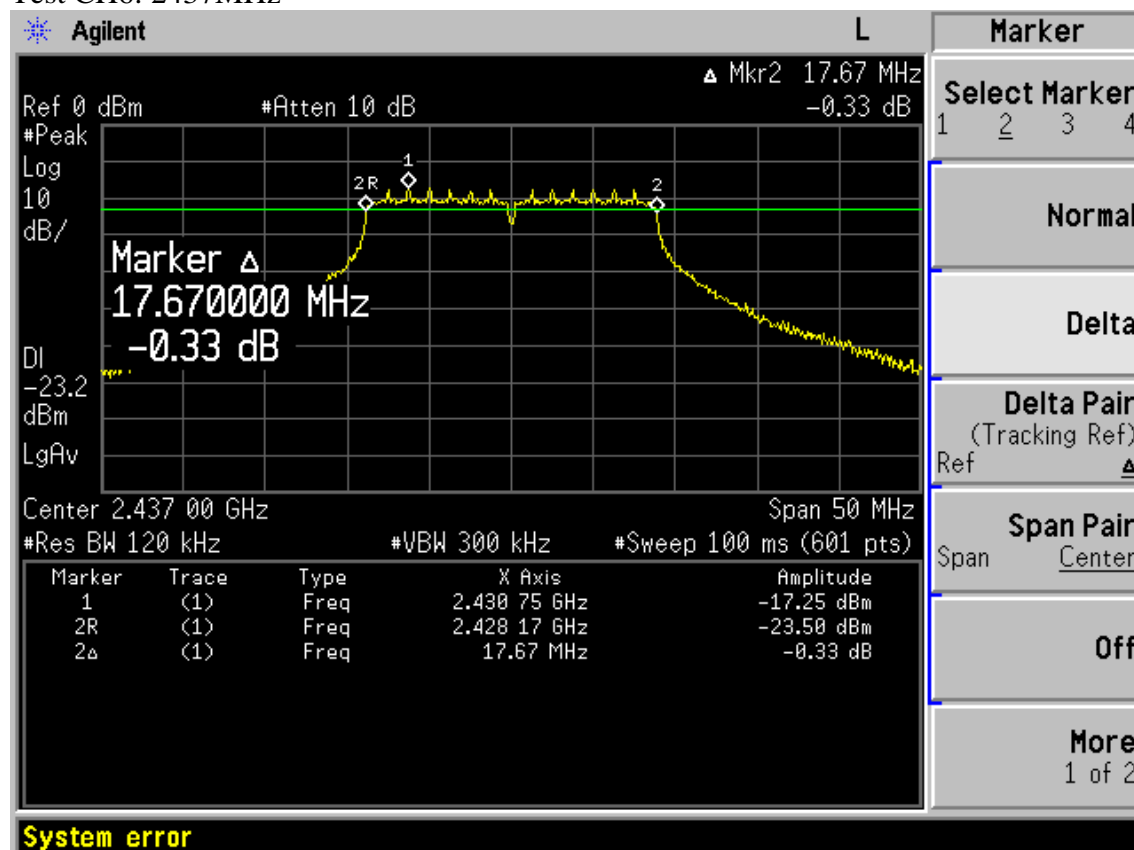


Test CH1: 2462MHz

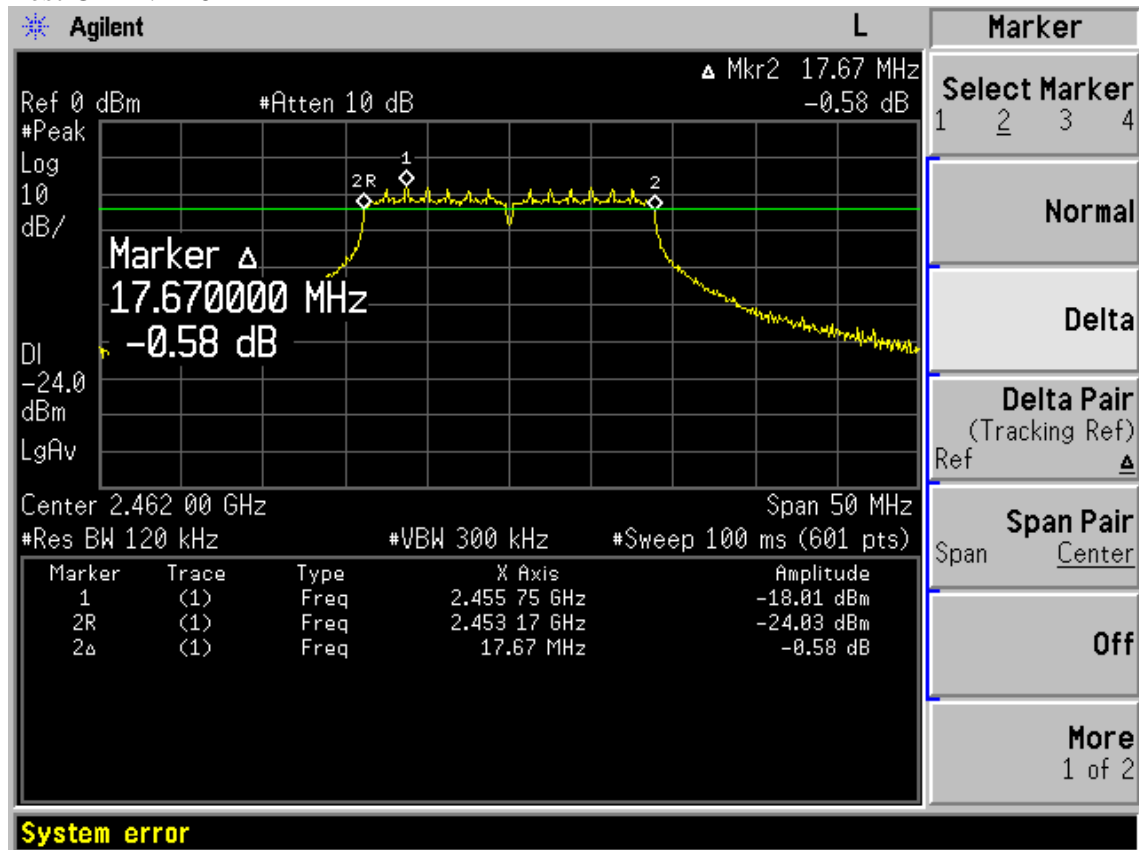


Test Mode: IEEE 802.11n HT40 TX

Test CH1: 2422MHz

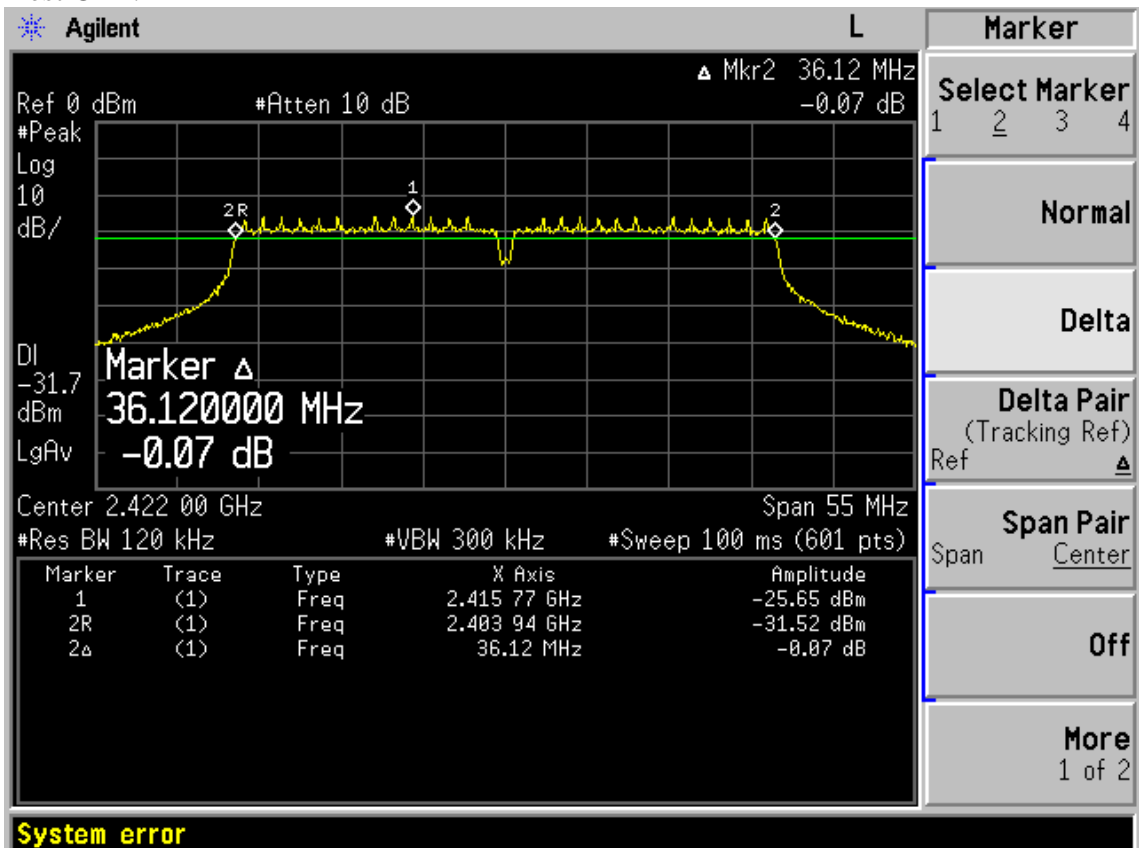




Test CH4: 2437MHz

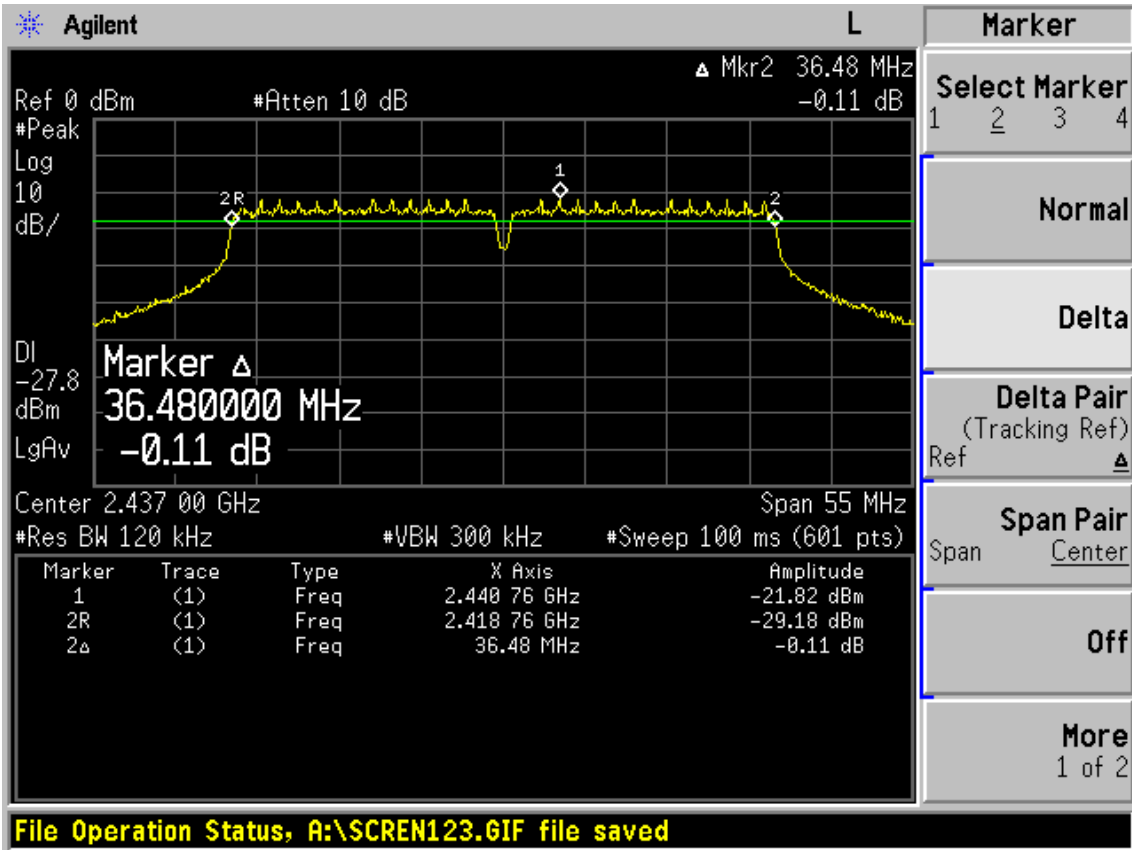

Test CH7: 2452MHz

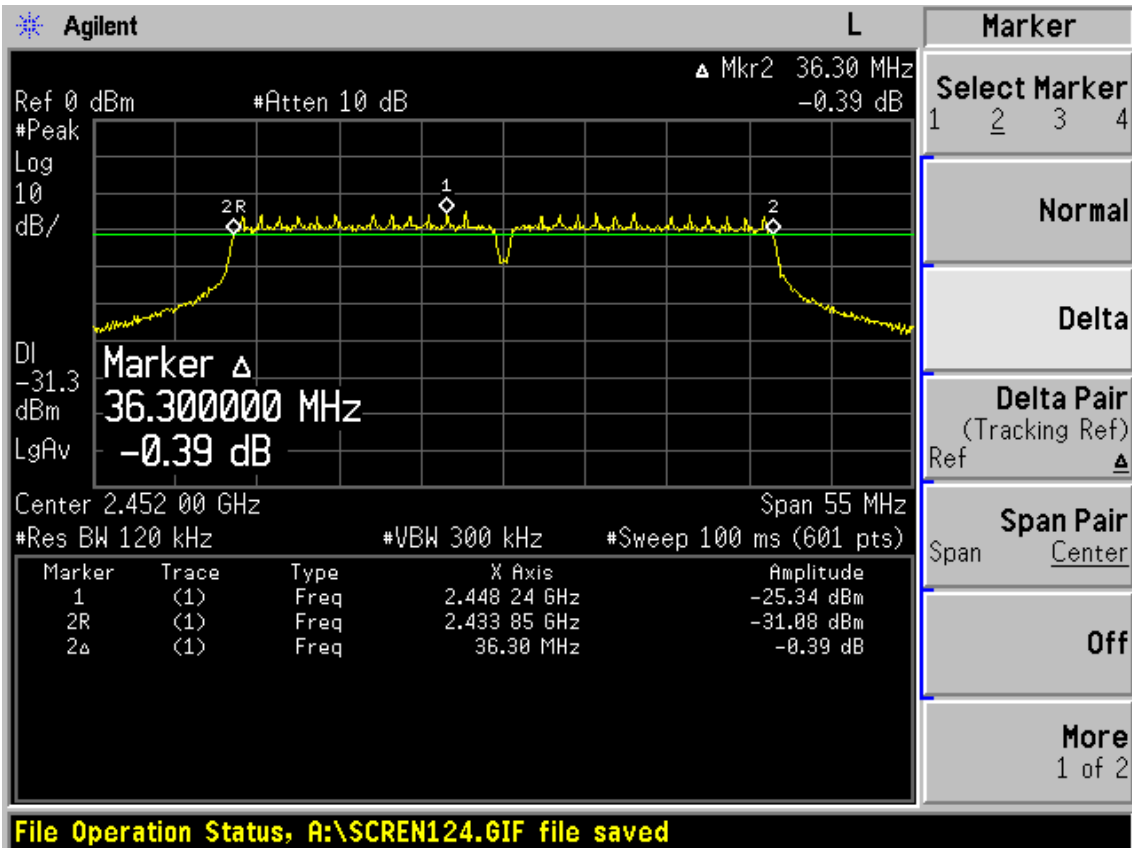

## 8. OUTPUT POWER TEST

### 8.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	E4446A	US44300459	May.08, 09	1 Year
2.	Attenuator	Agilent	8491B	MY39262165	May.08, 09	1 Year
3.	RF Cable	Hubersuhner	SUCOFLEX 102	28618/2	May.08, 09	1 Year

### 8.2. Limit(FCC Part 15C 15.247 b(3))

For systems using digital modulation in the 2400—2483.5MHz, The Peak out put Power shall not exceed 1W(30dBm)

### 8.3. Test Procedure

The transmitter output was connected to a Spectrum Analyzer through a 20dB Attenuator, and use the channel power measure function of Spectrum Analyzer to read out the peak output power of each chain's power.

## 8.4.Test Results

EUT: 150Mbps Wireless High Gain USB Adapter     M/N: TL-WN722N							
Power: DC 5V From PC input AC 120V/60Hz							
Data Rate:11b 1Mbps ; 11g    6Mbps ; 11n HT20    6.5Mbps    11n HT40 13.5Mbps (Note 1)							
Ambient Temperature:23℃			Relative Humidity: 60%				
Test date:2009/10/12			Test site: RF site		Tested by: Sunny-lu		
Test CH	11b 11g 11n HT20		CH1 2412MHz    CH6 2437MHz    CH11 2462MHz				
Test CH	11n HT40		CH1 2422MHz    CH4 2437MHz    CH7 2452MHz				
Mode	CH	PK Read (dBm)	Cable Loss (dBm)	Attenuator (dB)	Result (dBm)	Limit (dBm)	Conclusion
11b	CH1	-2.93	0.6	20.0	17.67	30.00	PASS
	CH6	-2.80	0.6	20.0	17.80	30.00	PASS
	CH11	-2.58	0.6	20.0	18.02	30.00	PASS
11g	CH1	1.65	0.6	20.0	22.25	30.00	PASS
	CH6	1.74	0.6	20.0	22.34	30.00	PASS
	CH11	0.42	0.6	20.0	21.02	30.00	PASS
11n HT20	CH1	-2.32	0.6	20.0	18.28	30.00	PASS
	CH6	1.38	0.6	20.0	21.98	30.00	PASS
	CH11	-1.93	0.6	20.0	18.67	30.00	PASS
11n HT40	CH1	-3.92	0.6	20.0	16.68	30.00	PASS
	CH4	0.20	0.6	20.0	20.80	30.00	PASS
	CH7	-3.04	0.6	20.0	17.56	30.00	PASS
Note1: According Exploratory test,These data rate have the maximum output power							
Note2: Result= PK read +cable loss+Attenuator							

## 9. POWER SPECTRAL DENSITY TEST

### 9.1.Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	E4446A	US44300459	May.08, 09	1 Year
2.	Attenuator	Agilent	8491B	MY39262165	May.08, 09	1 Year
3.	RF Cable	Hubersuhner	SUCOFLEX 102	28618/2	May.08, 09	1Year

### 9.2.Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

### 9.3.Test Procedure


The transmitter output was connected to a spectrum analyzer. Power density was measured by spectrum analyzer with 3kHz RBW and 30kHz VBW, sweep time=span/3kHz.

## 9.4.Test Results


EUT: 150Mbps Wireless High Gain USB Adapter     M/N: TL-WN722N							
Power: DC 5V From PC input AC 120V/60Hz							
Data Rate:11b: 1Mbps ; 11g : 6Mbps    11n HT20 : 6.5Mbps    11n HT40 : 13.5Mbps (Note 1)							
Ambient Temperature:23℃			Relative Humidity: 60%				
Test date:2009/10/12			Test site: RF site		Tested By: Sunny-lu		
Test CH	11b 11g 11n HT20		CH1:2412MHz    CH6:2437MHz    CH11:2462MHz				
Test CH	11n HT40		CH1:2422MHz    CH4:2437MHz    CH7:2452MHz				
Mode	CH	Read(dBm)	Cable loss (dB)	Attenuator (dB)	Result (dBm)	Limit(dBm)	Conclusion
11b	CH1	-30.43	0.6	20.0	-9.83	8.00	Pass
	CH6	-34.09	0.6	20.0	-13.49	8.00	Pass
	CH11	-32.27	0.6	20.0	-11.67	8.00	Pass
11g	CH1	-31.35	0.6	20.0	-10.75	8.00	Pass
	CH6	-32.22	0.6	20.0	-11.62	8.00	Pass
	CH11	-33.41	0.6	20.0	-12.81	8.00	Pass
11n HT20	CH1	-35.37	0.6	20.0	-14.77	8.00	Pass
	CH6	-31.16	0.6	20.0	-10.56	8.00	Pass
	CH11	-34.14	0.6	20.0	-13.54	8.00	Pass
11n HT40	CH1	-40.76	0.6	20.0	-20.16	8.00	Pass
	CH4	-34.81	0.6	20.0	-14.21	8.00	Pass
	CH7	-38.42	0.6	20.0	-17.82	8.00	Pass
Note1:According Exploratory test, These data rate have the maximum output power							
Note2:Result=Read+Cable loss+Attenuator							

Test Mode: IEEE 802.11b TX


Test CH1: 2412MHz

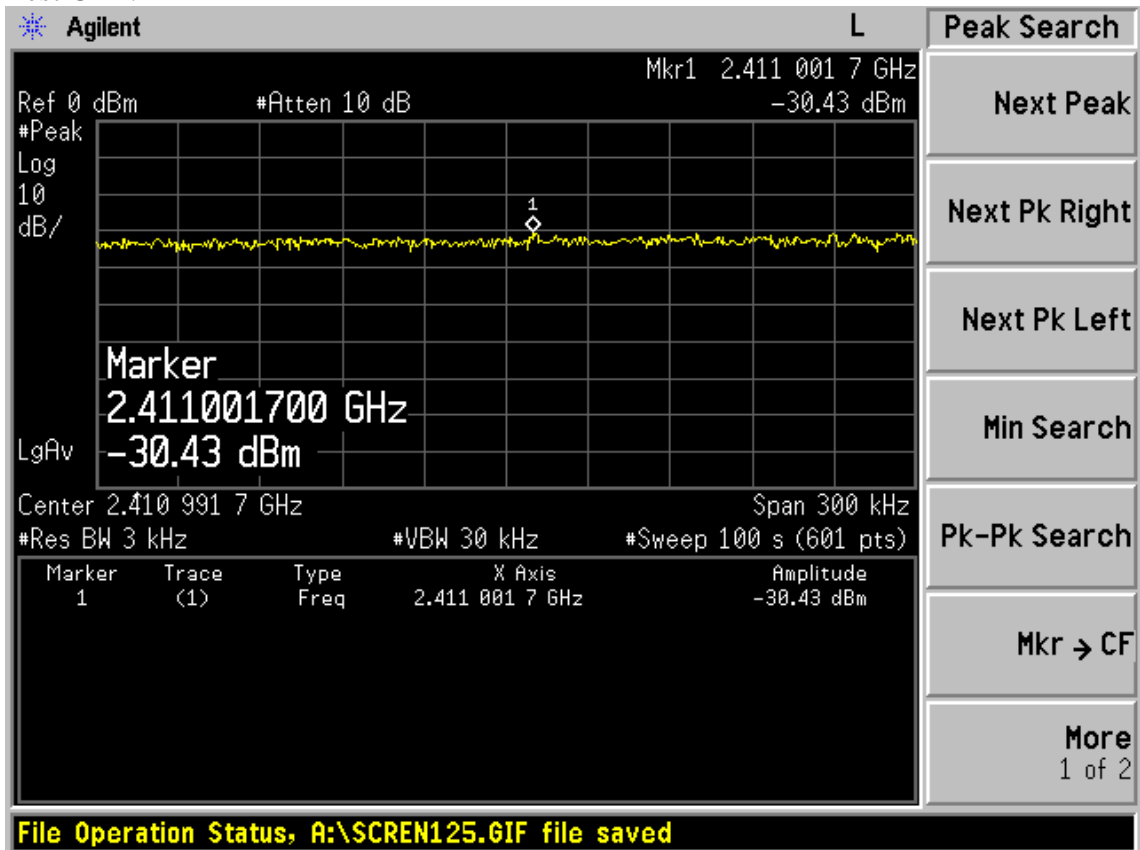

Test CH6: 2437MHz

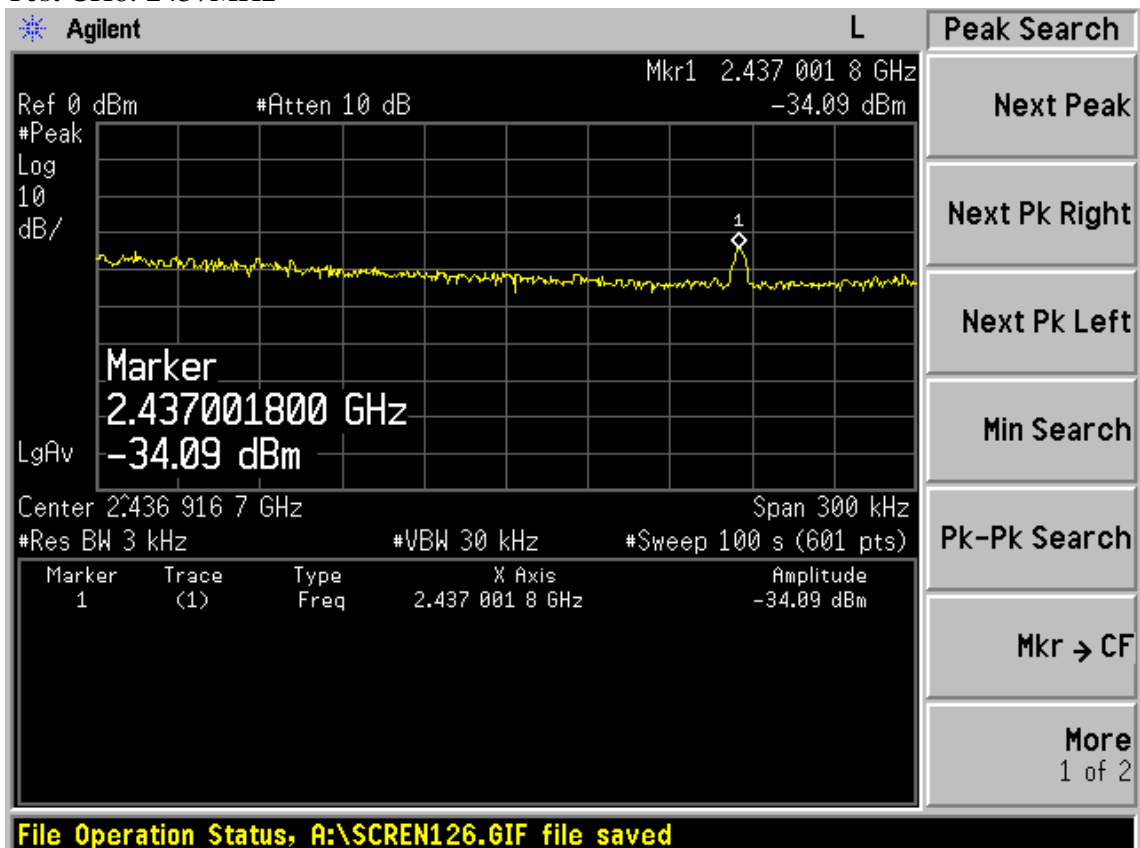


Test CH1: 2462MHz

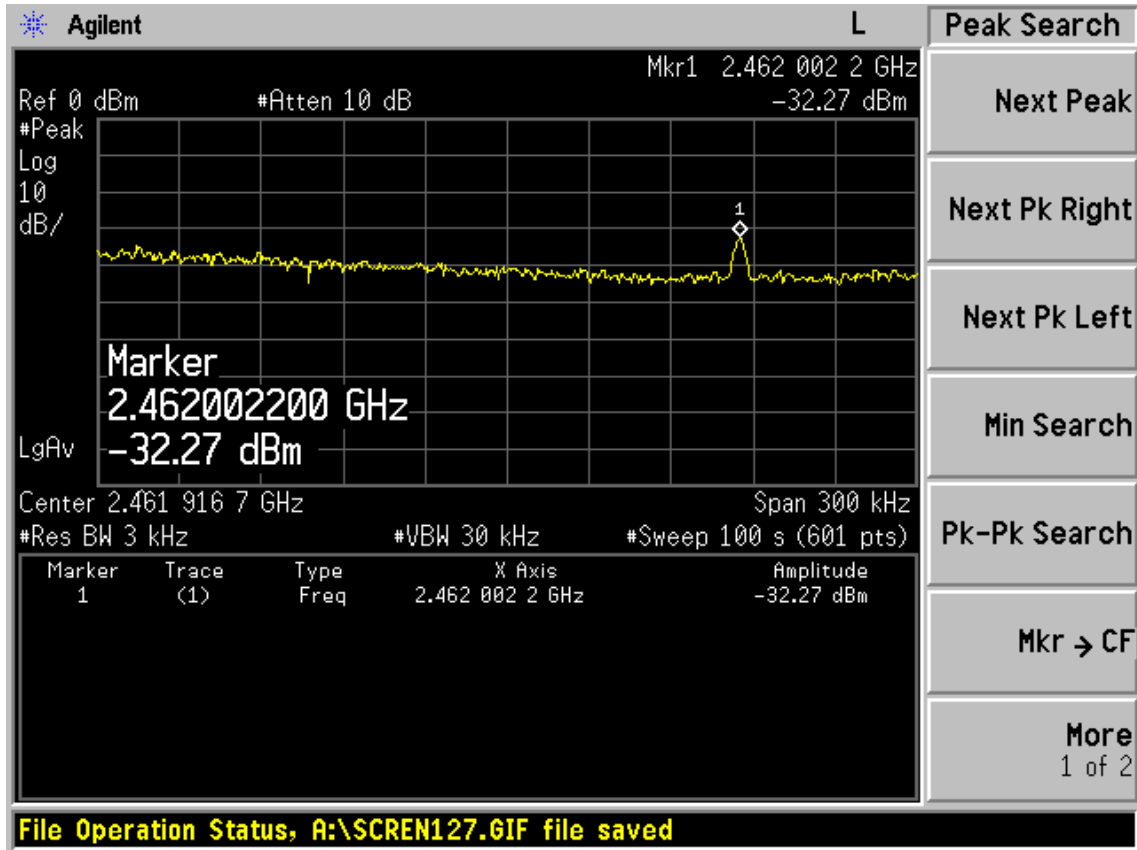


Test Mode: IEEE 802.11g TX


Test CH1: 2412MHz

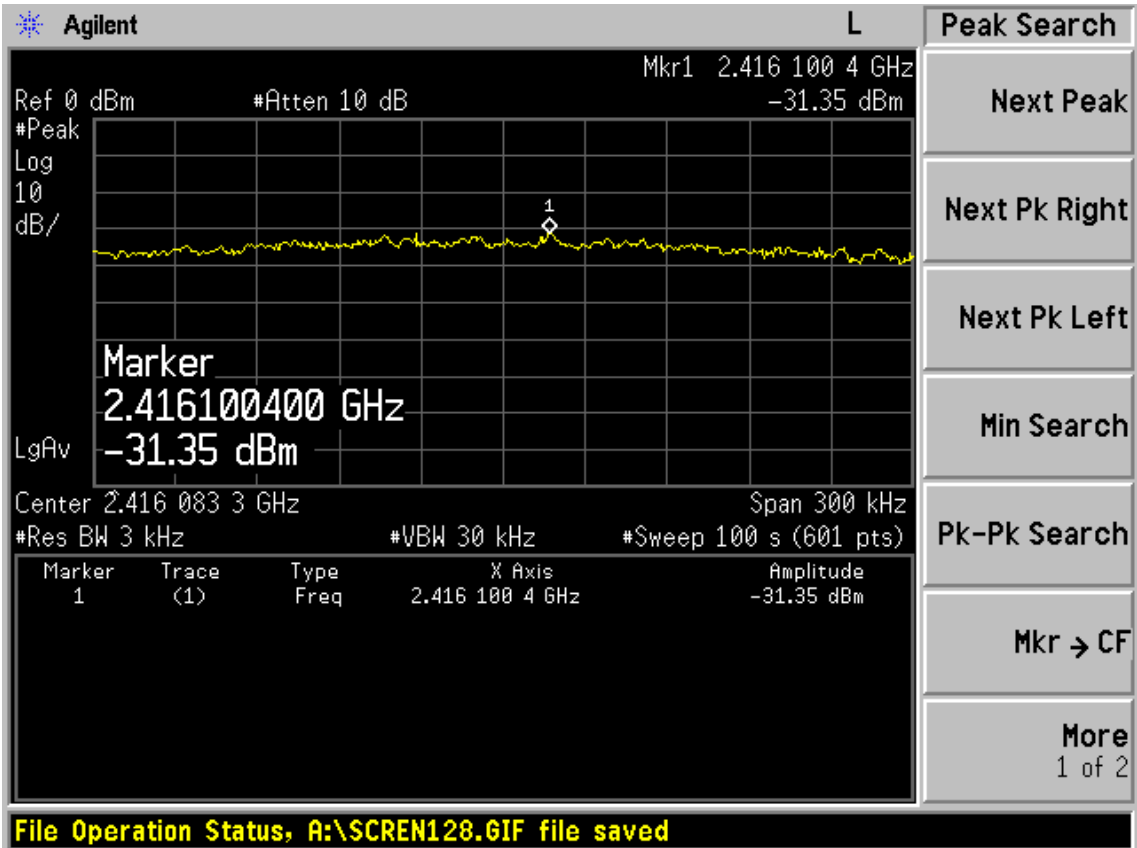

Test CH6: 2437MHz

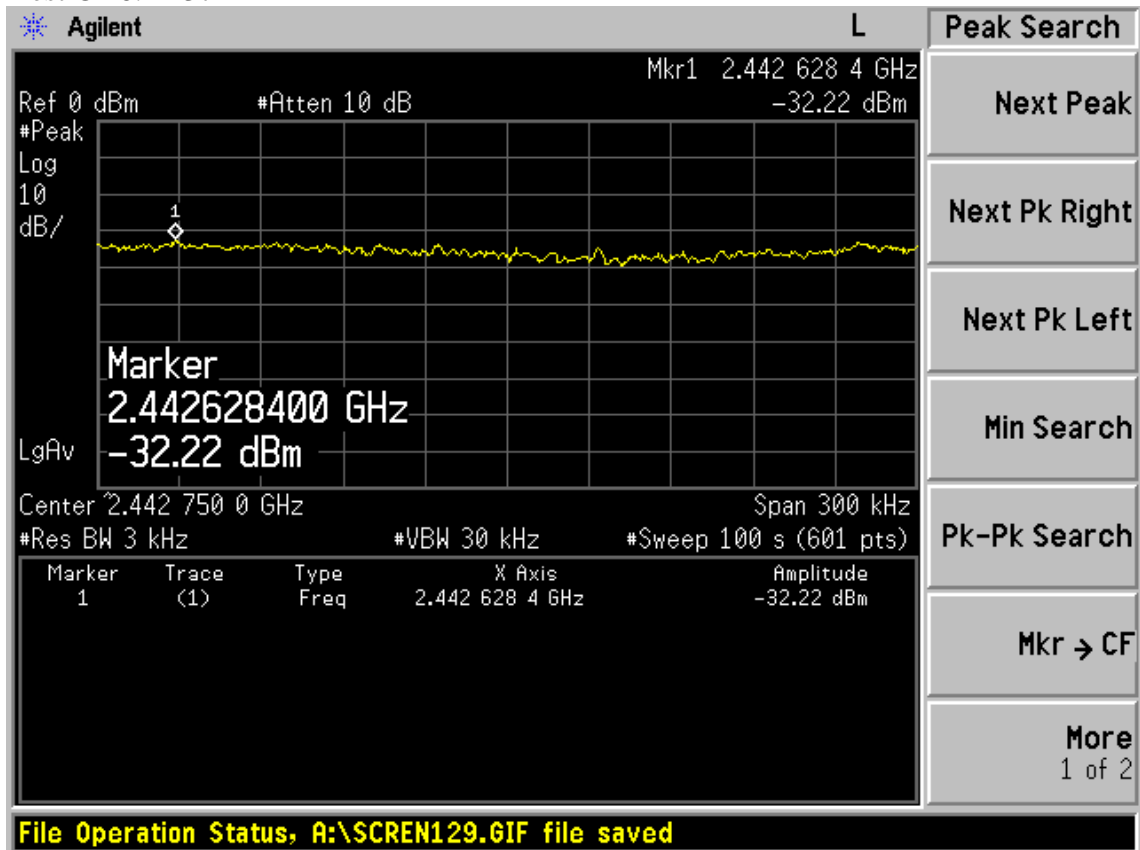


Test CH11: 2462MHz

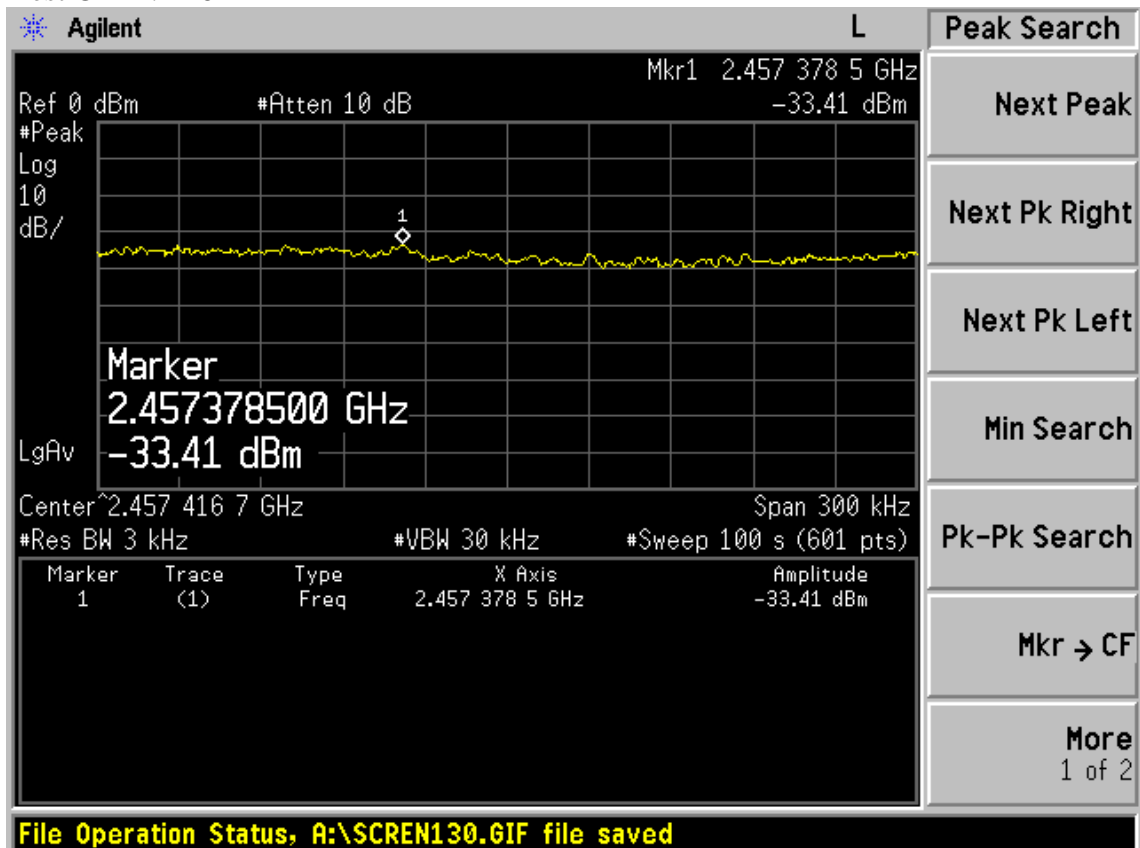




Test Mode: IEEE 802.11n HT20 TX


Test CH1: 2412MHz

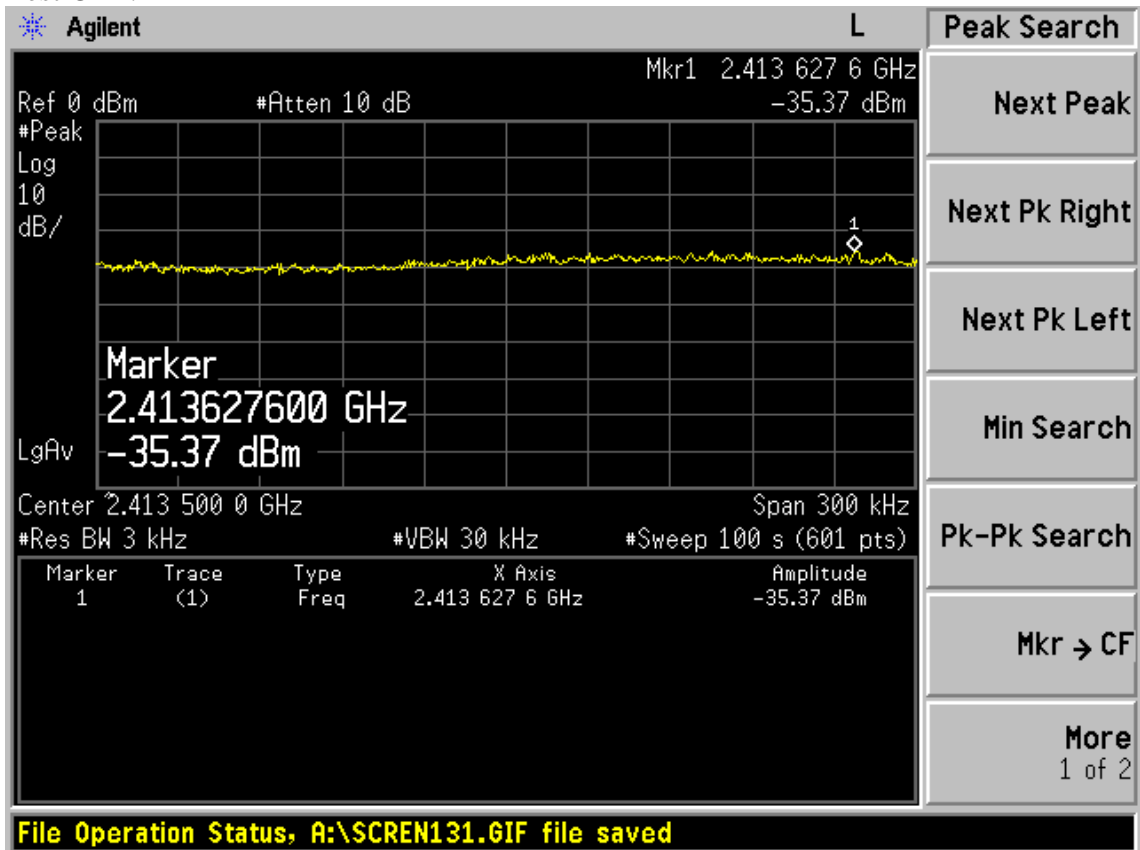

Test CH6: 2437MHz

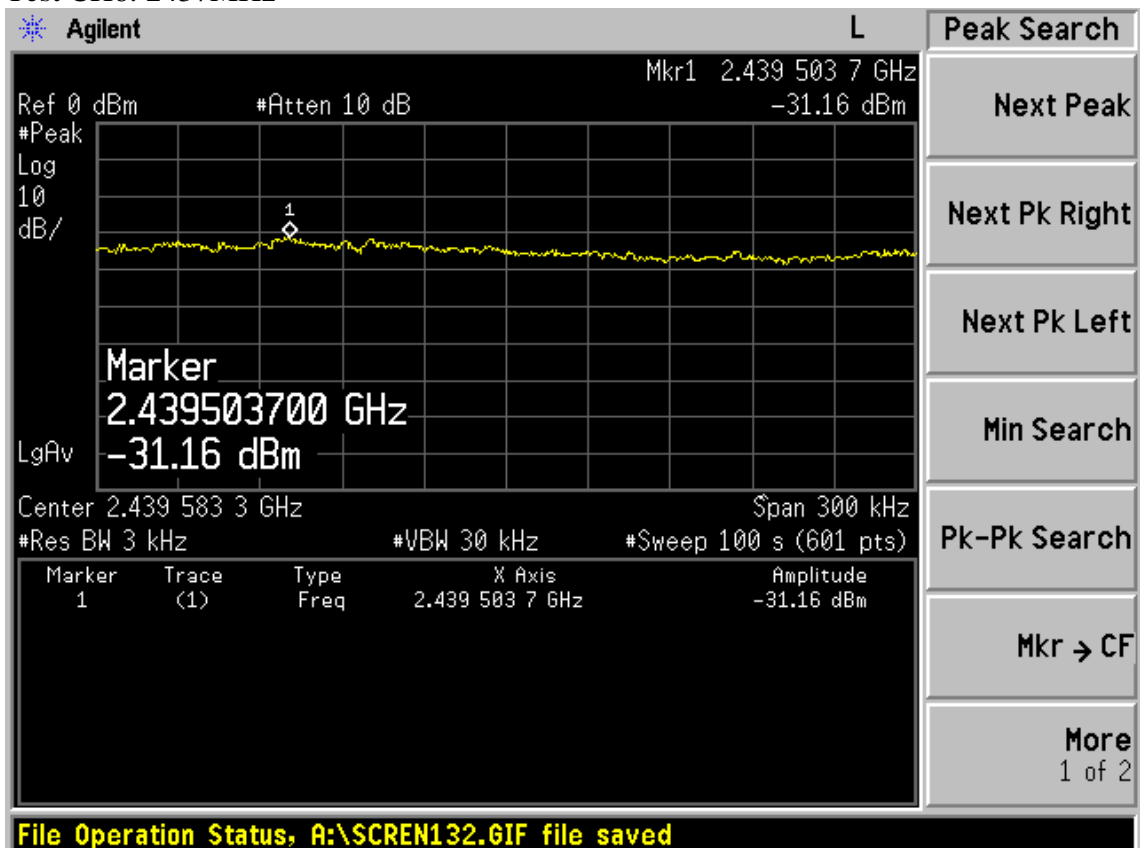


Test CH1: 2462MHz

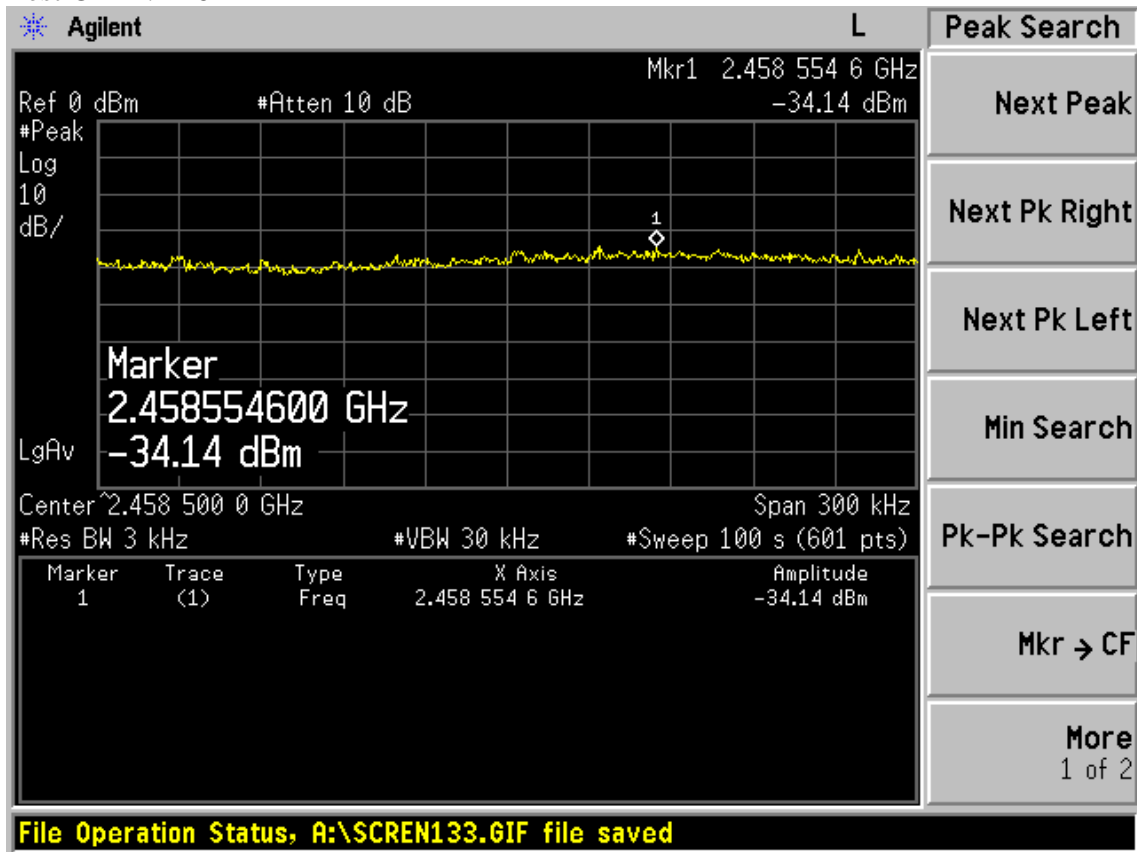


Test Mode: IEEE 802.11n HT40 TX


Test CH1: 2422MHz

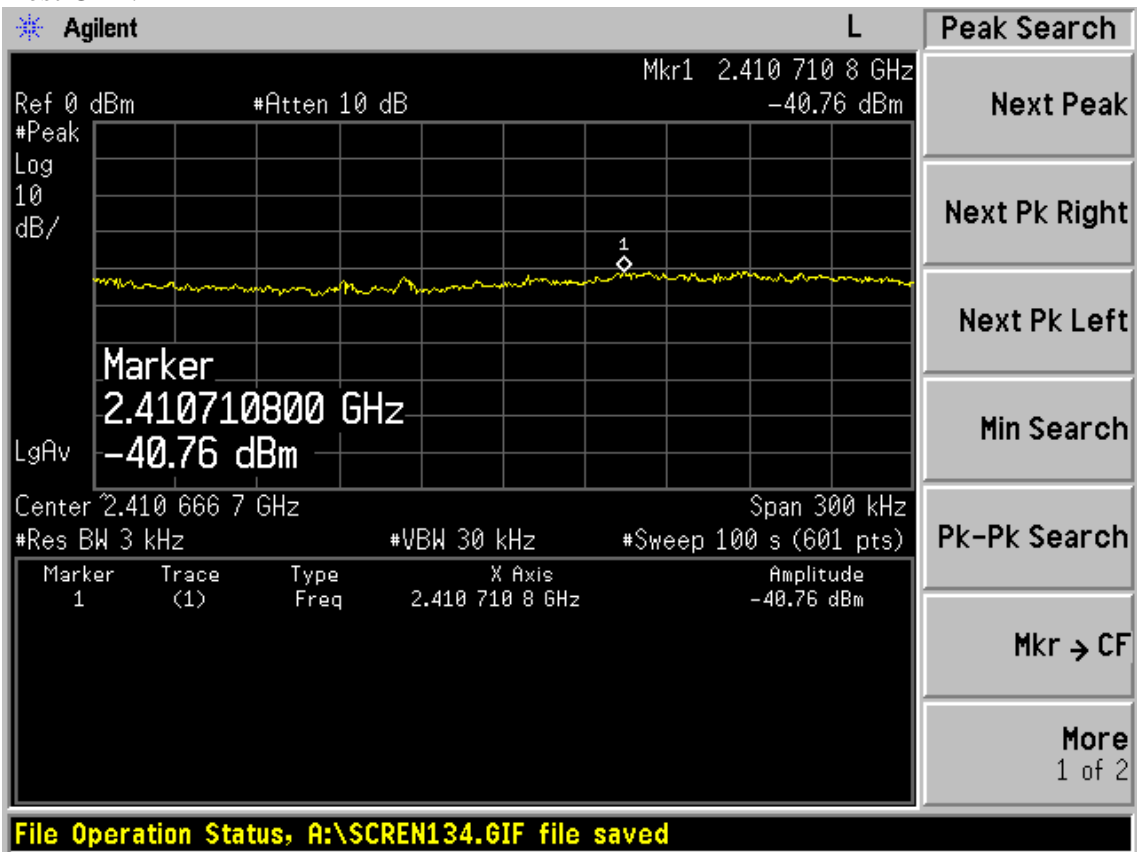

Test CH4: 2437MHz

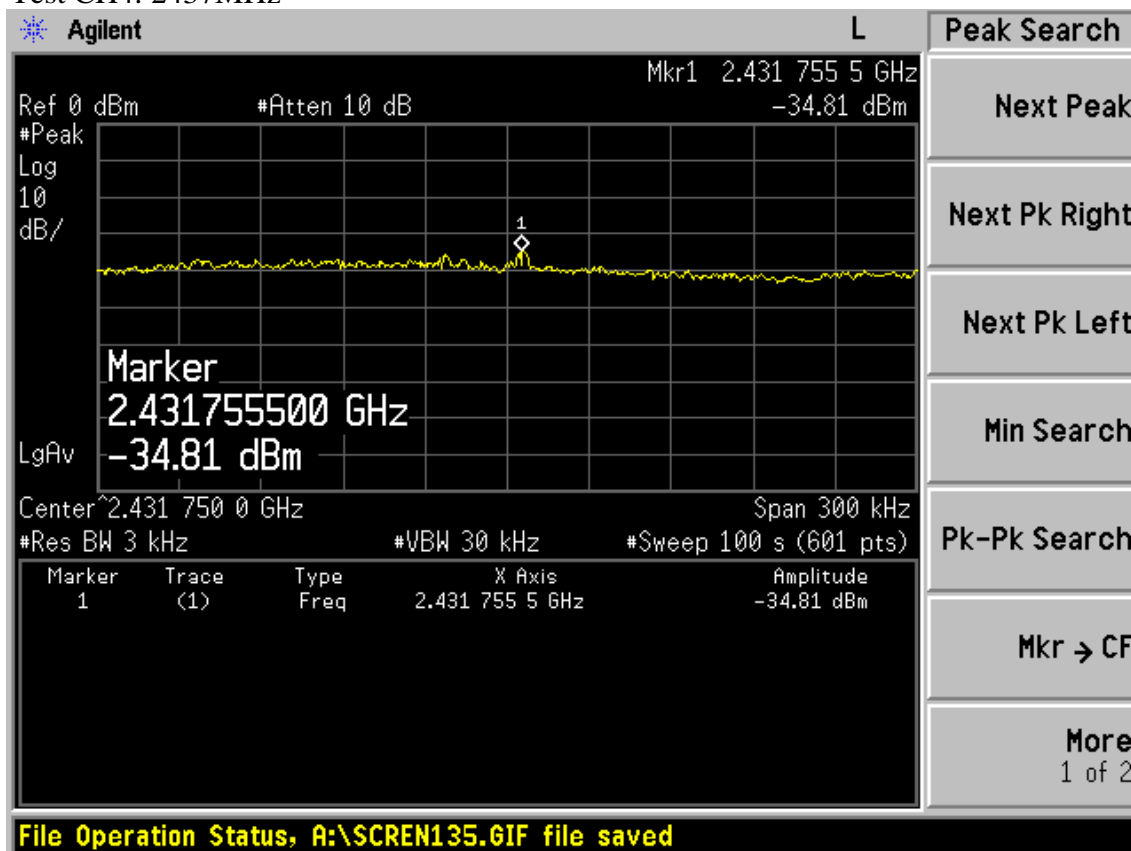

Test CH7: 2452MHz

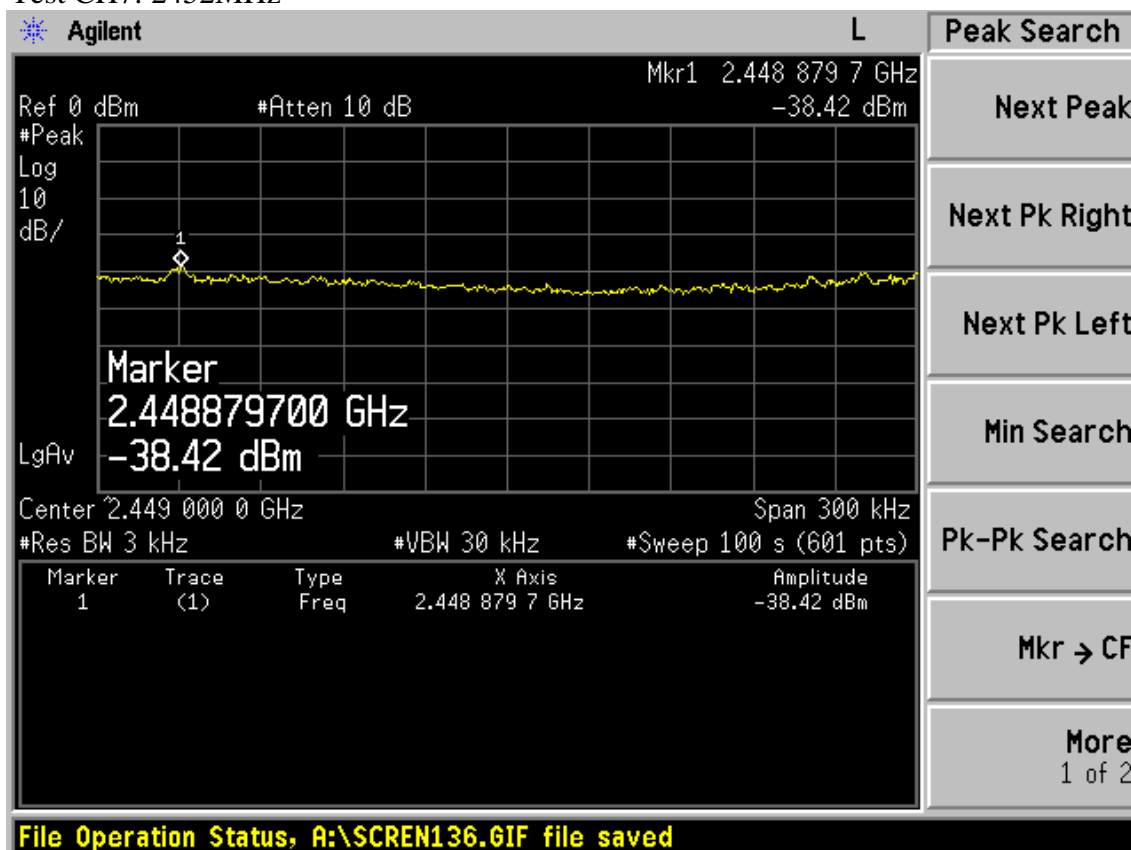

## **10. ANTENNA REQUIREMENT**

### **10.1 STANDARD APPLICABLE**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **10.2 ANTENNA CONNECTED CONSTRUCTION**

The antennas used for this product are integral PCB Antenna (Only used for receive) and a dipole antenna with SMA-B connector and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 2.12dBi

## **11.DEVIATION TO TEST SPECIFICATIONS**

[ NONE]