



A D T

RF TEST REPORT

REPORT NO.: RF120426C16

MODEL NO.: TL-WN951N

FCC ID: TE7WN951NV3

IC: 8853A-WN951NV3

RECEIVED: Apr. 26, 2012

TESTED: May 08 to 17, 2012

ISSUED: May 25, 2012

APPLICANT: TP-LINK TECHNOLOGIES CO., LTD.

ADDRESS: Building 24 (floors 1,3,4,5) and 28
(floors1-4) Central Science and Technology
Park,Shennan Rd, Nanshan,
Shenzhen,China

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS : No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

TEST LOCATION (1): No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

TEST LOCATION (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

This test report consists of 57 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





A D T

Table of Contents

RELEASE CONTROL RECORD	4
1. CERTIFICATION	5
2. SUMMARY OF TEST RESULTS	6
2.1 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	10
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	11
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	13
3.4 DESCRIPTION OF SUPPORT UNITS.....	14
3.5 CONFIGURATION OF SYSTEM UNDER TEST	14
4. TEST TYPES AND RESULTS	15
4.1 CONDUCTED EMISSION MEASUREMENT	15
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	15
4.1.2 TEST INSTRUMENTS.....	15
4.1.3 TEST PROCEDURES	16
4.1.4 DEVIATION FROM TEST STANDARD	16
4.1.5 TEST SETUP	17
4.1.6 EUT OPERATING CONDITIONS	17
4.1.7 TEST RESULTS	18
4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT	20
4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	20
4.2.2 TEST INSTRUMENTS.....	21
4.2.3 TEST PROCEDURES	23
4.2.4 DEVIATION FROM TEST STANDARD	23
4.2.5 TEST SETUP	24
4.2.6 EUT OPERATING CONDITIONS	24
4.2.7 TEST RESULTS	25
4.3 6dB BANDWIDTH MEASUREMENT	39
4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT	39
4.3.2 TEST INSTRUMENTS.....	39
4.3.3 TEST PROCEDURE.....	39
4.3.4 DEVIATION FROM TEST STANDARD	39
4.3.5 TEST SETUP	39
4.3.6 EUT OPERATING CONDITIONS	39
4.3.7 TEST RESULTS	40
4.4 OCCUPIED BANDWIDTH MEASUREMENT	41
4.4.1 TEST INSTRUMENTS.....	41
4.4.2 TEST PROCEDURE.....	41
4.4.3 DEVIATION FROM TEST STANDARD	41



A D T

4.4.4	TEST SETUP	41
4.4.5	EUT OPERATING CONDITIONS	41
4.4.6	TEST RESULTS	42
4.5	CONDUCTED OUTPUT POWER MEASUREMENT	43
4.5.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	43
4.5.2	INSTRUMENTS.....	43
4.5.3	TEST PROCEDURES	43
4.5.4	DEVIATION FROM TEST STANDARD	43
4.5.5	TEST SETUP	43
4.5.6	EUT OPERATING CONDITIONS	43
4.5.7	TEST RESULTS	44
4.6	POWER SPECTRAL DENSITY MEASUREMENT.....	46
4.6.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	46
4.6.2	TEST INSTRUMENTS.....	46
4.6.3	TEST PROCEDURE.....	46
4.6.4	DEVIATION FROM TEST STANDARD	46
4.6.5	TEST SETUP	46
4.6.6	EUT OPERATING CONDITION.....	46
4.6.7	TEST RESULTS	47
4.7	CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	49
4.7.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	49
4.7.2	TEST INSTRUMENTS.....	49
4.7.3	TEST PROCEDURE.....	49
4.7.4	DEVIATION FROM TEST STANDARD	50
4.7.5	TEST SETUP	50
4.7.6	EUT OPERATING CONDITION.....	50
4.7.7	TEST RESULTS	50
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	55
6.	INFORMATION ON THE TESTING LABORATORIES	56
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	57



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF120426C16	Original release	May 25, 2012

1. CERTIFICATION

PRODUCT: 300Mbps Wireless N PCI Adapter
BRAND NAME: TP-LINK
MODEL NO.: TL-WN951N
TEST SAMPLE: PROTOTYPE
APPLICANT: TP-LINK TECHNOLOGIES CO., LTD.
TESTED: May 08 to 17, 2012
STANDARDS: FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10-2009
Canada RSS-210 Issue 8 (2010-12)
Canada RSS-Gen Issue 3 (2010-12)

The above equipment (Model: TL-WN951N) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY :  , **DATE:** May 25, 2012
(Lori Chung, Specialist)

APPROVED BY :  , **DATE:** May 25, 2012
(May Chen, Deputy Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247); RSS-210; RSS-Gen				
STANDARD SECTION		TEST TYPE	RESULT	REMARK
FCC PART 15	CANADA STANDARD			
15.207	RSS-Gen 7.2.4	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -12.34dB at 0.70859MHz
-	RSS-Gen 4.6	Occupied Bandwidth Measurement	-	Meet the requirement.
15.247(d) 15.209	RSS-210 A8.5	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -0.7dB at 2483.5MHz
15.247(d)	RSS-210 A8.5	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	RSS-210 A8.2 (a)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	RSS-210 A8.2 (4)	Maximum Peak Output Power	PASS	Meet the requirement of limit.
15.247(e)	RSS-210 A8.2 (b)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	-	Antenna Requirement	PASS	Antenna connector is RP-SMA female not a standard connector.



A D T

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.98 dB
Radiated emissions (30MHz-1GHz)	5.69 dB
Radiated emissions (1GHz -6GHz)	4.93 dB
Radiated emissions (6GHz -18GHz)	5.32 dB
Radiated emissions (18GHz -40GHz)	5.36 dB



A D T

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	300Mbps Wireless N PCI Adapter
MODEL NO.	TL-WN951N
POWER SUPPLY	DC 3.3V from host equipment
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: up to 11Mbps 802.11g: up to 54Mbps 802.11n: up to 300Mbps
OPERATING FREQUENCY	2.412 ~ 2.462GHz
NUMBER OF CHANNEL	11 for 802.11b, 802.11g, 802.11n (20MHz) 7 for 802.11n (40MHz)
MAXIMUM OUTPUT POWER	802.11b: 91.636mW 802.11g: 381.193mW 802.11n (20MHz): 413.104mW 802.11n (40MHz): 376.954mW
ANTENNA TYPE	Please see NOTE
DATA CABLE	NA
I/O PORTS	Refer to user's manual
ASSOCIATED DEVICES	Antenna × 3



A D T

NOTE:

1. The antennas provided to the EUT, please refer to the following table:

Transmitter Circuit	Brand	Model	Antenna Type	Peak Gain (dBi)	Connector Type
Chain (0)	Cortec	AN2400-5505RS	Omni-Directional	2	RP-SMA female
Chain (1)	Cortec	AN2400-5505RS	Omni-Directional	2	RP-SMA female

2. The EUT incorporates a MIMO function.

MODULATION MODE	TX/Rx FUNCTION
802.11b	2Tx/2Rx
802.11g	2Tx/2Rx
802.11n (20MHz)	2Tx/2Rx
802.11n (40MHz)	2Tx/2Rx

3. The EUT is 2 * 2 spatial MIMO (2Tx & 2Rx) without beam forming function.

4. When the EUT operating in 802.11n, the software operation, which is defined by manufacturer, MCS (Modulation and Coding Schemes) from 0 to 15. For MCS 0~7 support the correlated signal function.

5. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



A D T

3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided for 802.11b, 802.11g, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

Seven channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		



3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO					DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	OB	
-	√	√	√	√	√	-

Where **PLC**: Power Line Conducted Emission **RE < 1G**: Radiated Emission below 1GHz
RE ≥ 1G: Radiated Emission above 1GHz **APCM**: Antenna Port Conducted Measurement
OB: Conducted Out-Band Emission Measurement

NOTE: The EUT had been pre-tested on the positioned of each 2 axis. The worst case was found when positioned on Y-plane.

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (20MHz)	1 to 11	11	OFDM	BPSK	6.5

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (20MHz)	1 to 11	11	OFDM	BPSK	6.5

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	13.5



A D T

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

CONDUCTED OUT-BAND EMISSION MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
PLC	25deg. C, 67%RH	120Vac, 60Hz	Frank Liu
RE<1G	26deg. C, 73%RH	120Vac, 60Hz	Amos Chuang
RE ³ 1G	24deg. C, 70%RH	120Vac, 60Hz	Robert Cheng
APCM	25deg. C, 60%RH	120Vac, 60Hz	Rex Huang
OB	25deg. C, 60%RH	120Vac, 60Hz	Rex Huang

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (Section 15.247)

ANSI C63.10-2009

Canada RSS-210 Issue 8 (2010-12)

Canada RSS-Gen Issue 3 (2010-12)

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	PERSONAL COMPUTER (For conducted test item)	DELL	DCSM	394QL1S	FCC DoC
	PERSONAL COMPUTER (For other test items)	DELL	DCNE	HRJB32S	FCC DoC
2	MONITOR	DELL	E2210Hc	CN-OG337R-6418 0-97S-OQ8S	FCC DoC
3	PRINTER	EPSON	LQ-300+II	G88Y074015	FCC DoC
4	MODEM	ACEEX	1414	0206026778	IFAXDM1414
5	KEYBOARD	DELL	SK-8115	MY-0DJ325-71619 -99B-0479	FCC DoC
6	MOUSE	DELL	MOC5UO	I14066PS	FCC DoC

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	VGA cable (1.8m), with 2 cores
3	Printer cable (1.8m)
4	RS-232 cable (1m)
5	USB cable (1.5m), with 1 core
6	USB cable (1.5m)

NOTE: All power cords of the above support units are non shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

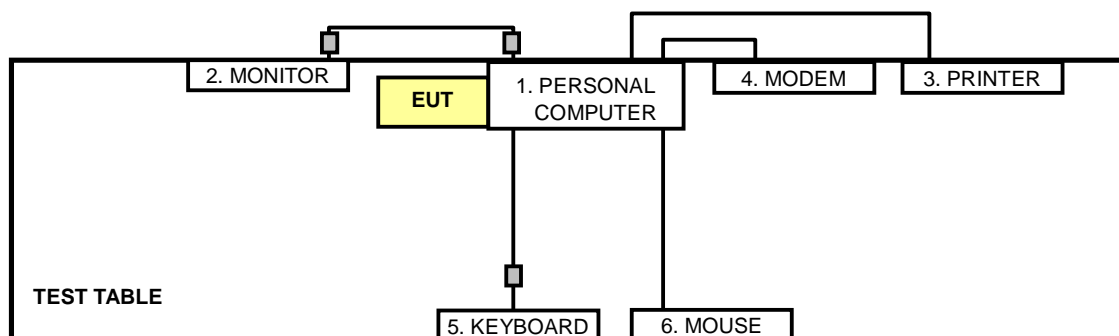



A D T

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver	ESCS 30	100375	Mar. 08, 2012	Mar. 07, 2013
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK8127	8127-522	Sep. 07, 2011	Sep. 06, 2012
Line-Impedance Stabilization Network (for Peripheral)	ESH3-Z5	848773/004	Nov. 02, 2011	Nov. 01, 2012
RF Cable (JYEBAO)	5DFB	COCCAB-001	Aug. 29, 2011	Aug. 28, 2012
50 ohms Terminator	50	3	Nov. 02, 2011	Nov. 01, 2012
Software ADT	BV ADT_Cond_V7.3.7	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.
4. Tested Date: May 17, 2012


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

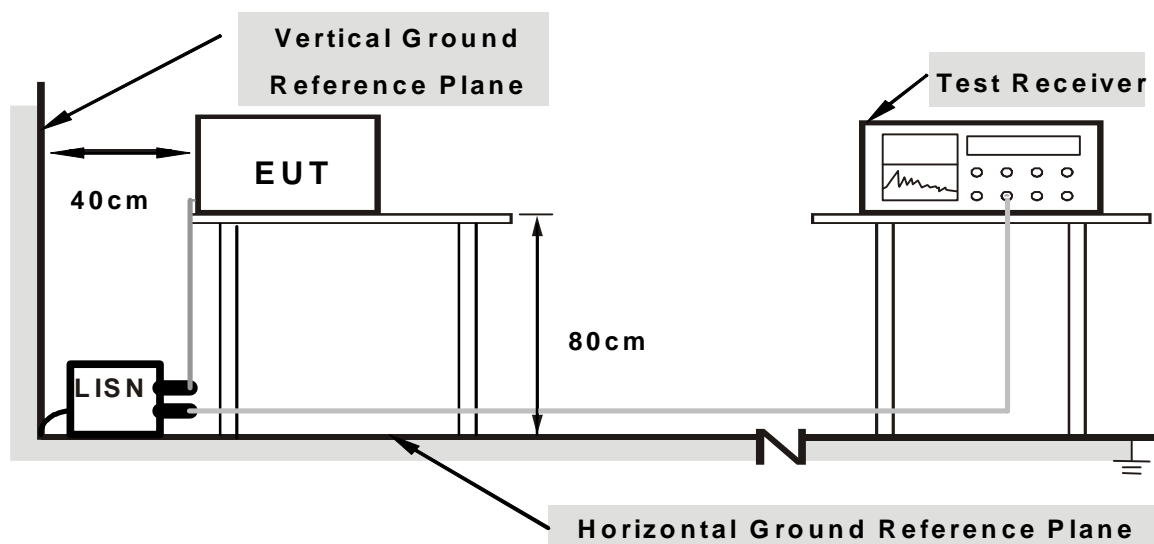

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

1. Connect the EUT with the support unit 1 (PERSONAL COMPUTER) which is placed on a testing table.
2. The communication partner run test program “art.exe” to enable EUT under transmission/receiving condition continuously at specific channel frequency.


4.1.7 TEST RESULTS

PHASE	Line (L)	6dB BANDWIDTH	9 kHz
--------------	----------	----------------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.16172	0.07	44.31	30.23	44.38	30.30	65.38	55.38	-21.00
2	0.19297	0.07	43.24	31.37	43.31	31.44	63.91	53.91	-20.60	-22.47
3	0.64219	0.09	40.63	32.44	40.72	32.53	56.00	46.00	-15.28	-13.47
4	0.70859	0.10	40.26	33.56	40.36	33.66	56.00	46.00	-15.64	-12.34
5	1.36328	0.14	35.12	28.26	35.26	28.40	56.00	46.00	-20.74	-17.60
6	4.08594	0.32	35.43	29.19	35.75	29.51	56.00	46.00	-20.25	-16.49

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

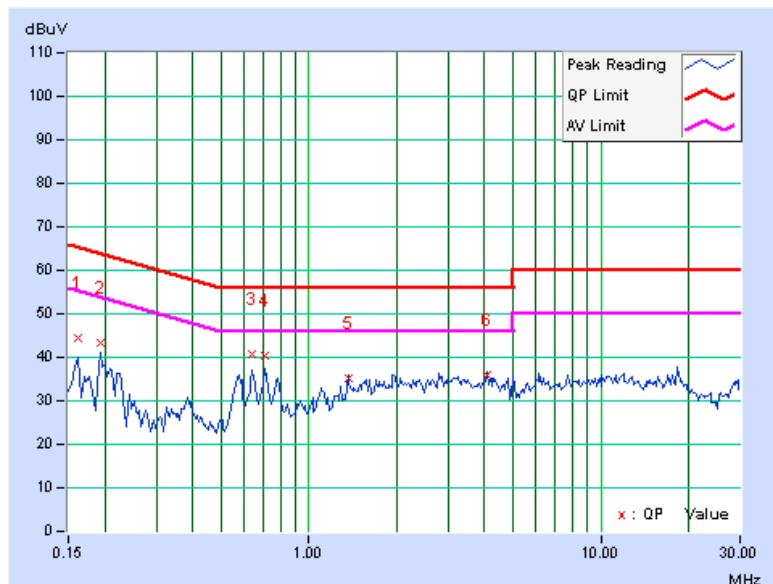


PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
--------------	-------------	----------------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.16172	0.06	48.21	39.44	48.27	39.50	65.38	55.38	-17.11
2	0.22031	0.06	42.12	27.23	42.18	27.29	62.81	52.81	-20.63	-25.52
3	0.29063	0.07	40.67	24.69	40.74	24.76	60.51	50.51	-19.77	-25.75
4	0.43906	0.08	37.53	17.68	37.61	17.76	57.08	47.08	-19.47	-29.32
5	0.60313	0.08	34.29	15.73	34.37	15.81	56.00	46.00	-21.63	-30.19
6	0.72031	0.09	30.13	20.24	30.22	20.33	56.00	46.00	-25.78	-25.67

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

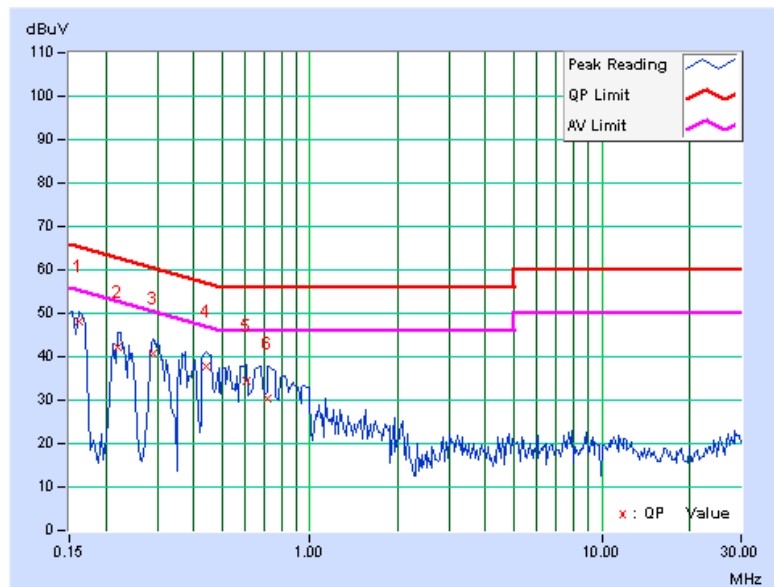

4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

4.2.2 TEST INSTRUMENTS

For below 1GHz test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250253	Aug. 29, 2011	Aug. 28, 2012
Agilent Pre-Selector	N9039A	MY46520310	Aug. 29, 2011	Aug. 28, 2012
Agilent Signal Generator	N5181A	MY49060347	July 25, 2011	July 24, 2012
Mini-Circuits Pre-Amplifier	ZFL-1000VH2B	AMP-ZFL-04	Nov. 15, 2011	Nov. 14, 2012
Agilent Pre-Amplifier	8449B	3008A02465	Feb. 27, 2012	Feb. 26, 2013
SPACEK LABS	SLKKa-48-6	9K16	Nov. 15, 2011	Nov. 14, 2012
SCHWARZBECK Trilog Broadband Antenna	VULB 9168	9168-361	Apr. 06, 2012	Apr. 05, 2013
AISI Horn_Antenna	AIH.8018	0000220091110	Nov. 23, 2011	Nov. 22, 2012
SCHWARZBECK Horn_Antenna	BBHA 9170	9170-424	Oct. 07, 2011	Oct. 06, 2012
RF CABLE	NA	RF104-205 RF104-207 RF104-202	Dec. 27, 2011	Dec. 26, 2012
RF Cable	NA	CHHCAB_001	Oct. 08, 2011	Oct. 07, 2012
Software	ADT_Radiated_V8.7.05	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in 966 Chamber No. H.
4. The FCC Site Registration No. is 797305.
5. The CANADA Site Registration No. is IC 7450H-3.
6. Tested Date: May 17, 2012



A D T

For above 1GHz test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250254	July 12, 2011	July 11, 2012
Agilent Pre-Selector	N9039A	MY46520311	July 12, 2011	July 11, 2012
Agilent Signal Generator	N5181A	MY49060517	July 12, 2011	July 11, 2012
Mini-Circuits Pre-Amplifier	ZFL-1000VH2B	AMP-ZFL-03	Nov. 15, 2011	Nov. 14, 2012
Agilent Pre-Amplifier	8449B	3008A02578	July 04, 2011	July 03, 2012
SPACEK LABS	SLKKa-48-6	9K16	Nov. 15, 2011	Nov. 14, 2012
SCHWARZBECK Trilog Broadband Antenna	VULB 9168	9168-360	Apr. 09, 2012	Apr. 08, 2013
AISI Horn_Antenna	AIH.8018	0000320091110	Nov. 14, 2011	Nov. 13, 2012
SCHWARZBECK Horn_Antenna	BBHA 9170	9170-424	Oct. 07, 2011	Oct. 06, 2012
RF CABLE	NA	RF104-201 RF104-203 RF104-204	Dec. 26, 2011	Dec. 25, 2012
RF Cable	NA	CHGCAB_001	Oct. 07, 2011	Oct. 06, 2012
Software	ADT_Radiated_V8.7.05	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
5. The VCCI Site Registration No. is G-137.
6. The CANADA Site Registration No. is IC 7450H-2.
7. Tested Date: May 08, 2012

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

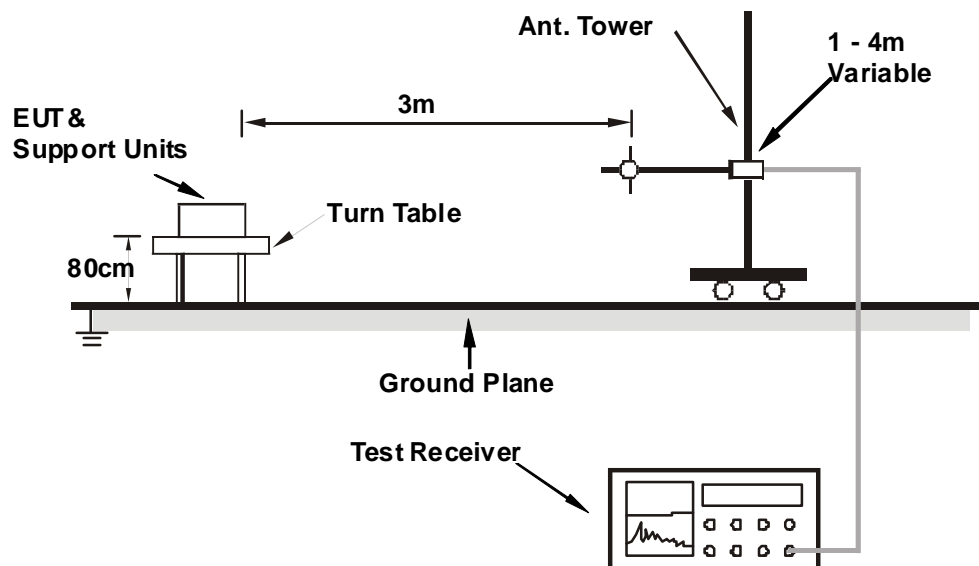

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA


802.11n (20MHz)

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	299.65	34.0 QP	46.0	-12.0	1.00 H	104	18.70	15.29
2	346.43	39.6 QP	46.0	-6.4	1.00 H	208	23.21	16.38
3	351.99	41.1 QP	46.0	-5.0	1.00 H	208	24.54	16.51
4	527.97	40.5 QP	46.0	-5.5	1.50 H	255	19.88	20.65
5	699.56	34.5 QP	46.0	-11.5	1.00 H	242	10.80	23.66
6	766.35	43.2 QP	46.0	-2.8	1.00 H	230	18.27	24.91
7	804.01	41.3 QP	46.0	-4.7	1.00 H	247	15.61	25.67
8	809.58	41.1 QP	46.0	-4.9	1.00 H	227	15.34	25.75
9	962.34	37.4 QP	54.0	-16.7	1.25 H	64	9.34	28.01

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

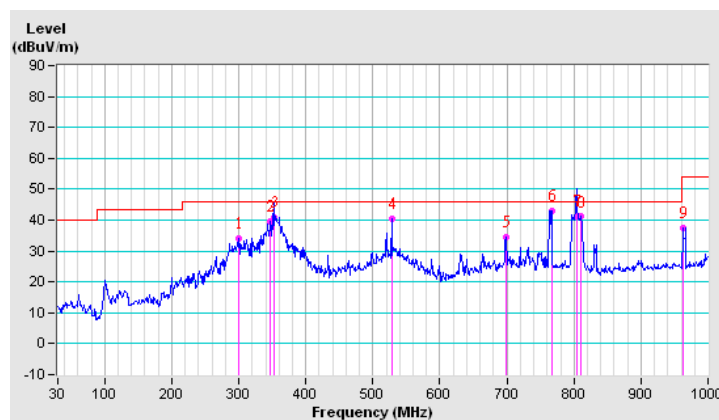


CHANNEL	TX Channel 11	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	49.54	25.5 QP	40.0	-14.6	1.00 V	239	11.49	13.96
2	351.99	42.8 QP	46.0	-3.2	2.00 V	137	26.26	16.51
3	527.97	39.2 QP	46.0	-6.8	1.25 V	152	18.52	20.65
4	698.73	36.9 QP	46.0	-9.1	1.25 V	158	13.22	23.65
5	763.27	42.7 QP	46.0	-3.3	1.75 V	217	17.88	24.84
6	804.01	41.1 QP	46.0	-5.0	1.50 V	196	15.38	25.67
7	962.34	35.8 QP	54.0	-18.2	1.50 V	93	7.77	28.01

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

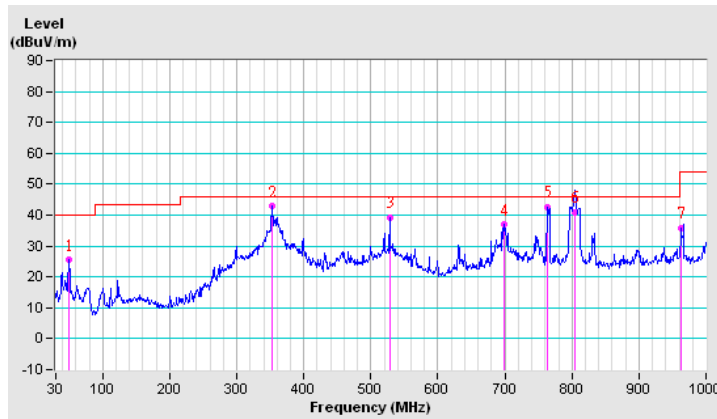



A D T

ABOVE 1GHz DATA

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.8 PK	74.0	-17.2	1.56 H	161	25.14	31.66
2	2390.00	44.9 AV	54.0	-9.1	1.56 H	161	13.24	31.66
3	*2412.00	104.9 PK			1.56 H	79	73.17	31.73
4	*2412.00	101.6 AV			1.56 H	79	69.87	31.73
5	4824.00	52.9 PK	74.0	-21.1	1.34 H	294	13.93	38.97
6	4824.00	45.6 AV	54.0	-8.4	1.34 H	294	6.63	38.97

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.6 PK	74.0	-17.4	1.73 V	106	24.94	31.66
2	2390.00	44.7 AV	54.0	-9.3	1.73 V	106	13.04	31.66
3	*2412.00	105.4 PK			1.73 V	106	73.67	31.73
4	*2412.00	102.8 AV			1.73 V	106	71.07	31.73
5	4824.00	50.6 PK	74.0	-23.4	1.09 V	342	11.63	38.97
6	4824.00	43.4 AV	54.0	-10.6	1.09 V	342	4.43	38.97

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	103.9 PK			1.56 H	76	72.09	31.81
2	*2437.00	100.8 AV			1.56 H	76	68.99	31.81
3	4874.00	52.1 PK	74.0	-21.9	1.36 H	279	12.96	39.14
4	4874.00	45.1 AV	54.0	-8.9	1.36 H	279	5.96	39.14
5	7311.00	57.2 PK	74.0	-16.8	1.15 H	15	10.57	46.63
6	7311.00	46.7 AV	54.0	-7.3	1.15 H	15	0.07	46.63

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	104.9 PK			1.71 V	104	73.09	31.81
2	*2437.00	102.0 AV			1.71 V	104	70.19	31.81
3	4874.00	50.0 PK	74.0	-24.0	1.02 V	351	10.86	39.14
4	4874.00	42.0 AV	54.0	-12.0	1.02 V	351	2.86	39.14
5	7311.00	55.0 PK	74.0	-19.0	1.11 V	344	8.37	46.63
6	7311.00	44.4 AV	54.0	-9.6	1.11 V	344	-2.23	46.63

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	103.5 PK			1.59 H	71	71.61	31.89
2	*2462.00	100.4 AV			1.59 H	71	68.51	31.89
3	2483.50	56.9 PK	74.0	-17.1	1.59 H	171	24.93	31.97
4	2483.50	45.1 AV	54.0	-8.9	1.59 H	171	13.13	31.97
5	4924.00	51.7 PK	74.0	-22.3	1.32 H	289	12.39	39.31
6	4924.00	44.6 AV	54.0	-9.4	1.32 H	289	5.29	39.31
7	7386.00	57.1 PK	74.0	-16.9	1.14 H	4	10.50	46.60
8	7386.00	46.6 AV	54.0	-7.4	1.14 H	4	0.00	46.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	105.0 PK			1.56 V	297	73.11	31.89
2	*2462.00	101.7 AV			1.56 V	297	69.81	31.89
3	2483.50	57.9 PK	74.0	-16.1	1.59 V	297	25.93	31.97
4	2483.50	45.3 AV	54.0	-8.7	1.59 V	297	13.33	31.97
5	4924.00	48.5 PK	74.0	-25.5	1.16 V	272	9.19	39.31
6	4924.00	42.4 AV	54.0	-11.6	1.16 V	272	3.09	39.31
7	7386.00	58.2 PK	74.0	-15.8	1.07 V	344	11.60	46.60
8	7386.00	50.2 AV	54.0	-3.8	1.07 V	344	3.60	46.60

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency.



A D T

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.8 PK	74.0	-15.2	1.54 H	155	27.14	31.66
2	2390.00	46.1 AV	54.0	-7.9	1.54 H	155	14.44	31.66
3	*2412.00	106.1 PK			1.62 H	87	74.37	31.73
4	*2412.00	95.9 AV			1.62 H	87	64.17	31.73
5	4824.00	53.1 PK	74.0	-20.9	1.03 H	117	14.13	38.97
6	4824.00	37.7 AV	54.0	-16.3	1.03 H	117	-1.27	38.97

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.4 PK	74.0	-7.6	1.51 V	245	34.74	31.66
2	2390.00	49.4 AV	54.0	-4.6	1.51 V	245	17.74	31.66
3	*2412.00	107.0 PK			1.51 V	245	75.27	31.73
4	*2412.00	97.0 AV			1.51 V	245	65.27	31.73
5	4824.00	54.3 PK	74.0	-19.7	1.35 V	314	15.33	38.97
6	4824.00	38.2 AV	54.0	-15.8	1.35 V	314	-0.77	38.97

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	106.3 PK			1.57 H	74	74.49	31.81
2	*2437.00	96.1 AV			1.57 H	74	64.29	31.81
3	4874.00	53.0 PK	74.0	-21.0	1.08 H	126	13.86	39.14
4	4874.00	37.6 AV	54.0	-16.4	1.08 H	126	-1.54	39.14
5	7311.00	57.5 PK	74.0	-16.5	1.07 H	135	10.87	46.63
6	7311.00	44.9 AV	54.0	-9.1	1.07 H	135	-1.73	46.63

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	107.5 PK			1.50 V	244	75.69	31.81
2	*2437.00	97.2 AV			1.50 V	244	65.39	31.81
3	4874.00	53.8 PK	74.0	-20.2	1.33 V	323	14.66	39.14
4	4874.00	37.7 AV	54.0	-16.3	1.33 V	323	-1.44	39.14
5	7311.00	57.6 PK	74.0	-16.4	1.20 V	355	10.97	46.63
6	7311.00	44.8 AV	54.0	-9.2	1.20 V	355	-1.83	46.63

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	106.0 PK			1.57 H	76	74.11	31.89
2	*2462.00	95.7 AV			1.57 H	76	63.81	31.89
3	2483.50	63.3 PK	74.0	-10.7	1.57 H	76	31.33	31.97
4	2483.50	49.8 AV	54.0	-4.2	1.57 H	76	17.83	31.97
5	4924.00	52.9 PK	74.0	-21.1	1.03 H	114	13.59	39.31
6	4924.00	37.5 AV	54.0	-16.5	1.03 H	114	-1.81	39.31
7	7386.00	57.4 PK	74.0	-16.6	1.04 H	134	10.80	46.60
8	7386.00	44.8 AV	54.0	-9.2	1.04 H	134	-1.80	46.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	107.2 PK			1.48 V	246	75.31	31.89
2	*2462.00	96.8 AV			1.48 V	246	64.91	31.89
3	2483.50	69.6 PK	74.0	-4.4	1.46 V	246	37.63	31.97
4	2483.50	52.7 AV	54.0	-1.3	1.46 V	246	20.73	31.97
5	4924.00	54.3 PK	74.0	-19.7	1.33 V	337	14.99	39.31
6	4924.00	38.0 AV	54.0	-16.0	1.33 V	337	-1.31	39.31
7	7386.00	57.3 PK	74.0	-16.7	1.24 V	343	10.70	46.60
8	7386.00	44.5 AV	54.0	-9.5	1.24 V	343	-2.10	46.60

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency.



A D T

802.11n (20MHz)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.8 PK	74.0	-14.2	1.57 H	96	28.14	31.66
2	2390.00	47.5 AV	54.0	-6.5	1.57 H	96	15.84	31.66
3	*2412.00	105.6 PK			1.57 H	96	73.87	31.73
4	*2412.00	95.4 AV			1.57 H	96	63.67	31.73
5	4824.00	52.8 PK	74.0	-21.2	1.00 H	128	13.83	38.97
6	4824.00	37.5 AV	54.0	-16.5	1.00 H	128	-1.47	38.97

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.6 PK	74.0	-13.4	1.69 V	112	28.94	31.66
2	2390.00	48.2 AV	54.0	-5.8	1.69 V	112	16.54	31.66
3	*2412.00	106.1 PK			1.71 V	115	74.37	31.73
4	*2412.00	95.9 AV			1.71 V	115	64.17	31.73
5	4824.00	53.1 PK	74.0	-20.9	1.38 V	328	14.13	38.97
6	4824.00	37.1 AV	54.0	-16.9	1.38 V	328	-1.87	38.97

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	104.9 PK			1.59 H	104	73.09	31.81
2	*2437.00	95.6 AV			1.59 H	104	63.79	31.81
3	4874.00	52.9 PK	74.0	-21.1	1.02 H	123	13.76	39.14
4	4874.00	37.8 AV	54.0	-16.2	1.02 H	123	-1.34	39.14
5	7311.00	57.3 PK	74.0	-16.7	1.10 H	130	10.67	46.63
6	7311.00	44.6 AV	54.0	-9.4	1.10 H	130	-2.03	46.63

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	106.4 PK			1.63 V	117	74.59	31.81
2	*2437.00	96.2 AV			1.63 V	117	64.39	31.81
3	4874.00	54.2 PK	74.0	-19.8	1.31 V	341	15.06	39.14
4	4874.00	37.5 AV	54.0	-16.5	1.31 V	341	-1.64	39.14
5	7311.00	57.3 PK	74.0	-16.7	1.23 V	357	10.67	46.63
6	7311.00	44.7 AV	54.0	-9.3	1.23 V	357	-1.93	46.63

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	105.2 PK			1.61 H	109	73.31	31.89
2	*2462.00	96.1 AV			1.61 H	109	64.21	31.89
3	2483.50	60.8 PK	74.0	-13.2	1.62 H	109	28.83	31.97
4	2483.50	48.2 AV	54.0	-5.8	1.62 H	109	16.23	31.97
5	4924.00	52.7 PK	74.0	-21.3	1.00 H	121	13.39	39.31
6	4924.00	37.5 AV	54.0	-16.5	1.00 H	121	-1.81	39.31
7	7386.00	57.6 PK	74.0	-16.4	1.10 H	119	11.00	46.60
8	7386.00	44.6 AV	54.0	-9.4	1.10 H	119	-2.00	46.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	107.5 PK			1.49 V	244	75.61	31.89
2	*2462.00	96.8 AV			1.49 V	244	64.91	31.89
3	2483.50	68.6 PK	74.0	-5.4	1.48 V	245	36.63	31.97
4	2483.50	52.6 AV	54.0	-1.4	1.48 V	245	20.63	31.97
5	4924.00	53.9 PK	74.0	-20.1	1.34 V	352	14.59	39.31
6	4924.00	37.4 AV	54.0	-16.6	1.34 V	352	-1.91	39.31
7	7386.00	57.0 PK	74.0	-17.0	1.26 V	342	10.40	46.60
8	7386.00	45.2 AV	54.0	-8.8	1.26 V	342	-1.40	46.60

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency.



802.11n (40MHz)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.8 PK	74.0	-9.2	1.44 H	59	33.14	31.66
2	2390.00	49.8 AV	54.0	-4.2	1.44 H	59	18.14	31.66
3	*2422.00	102.0 PK			1.49 H	76	70.24	31.76
4	*2422.00	90.1 AV			1.49 H	76	58.34	31.76
5	4844.00	51.9 PK	74.0	-22.1	1.00 H	149	12.86	39.04
6	4844.00	36.8 AV	54.0	-17.2	1.00 H	149	-2.24	39.04
7	7266.00	56.2 PK	74.0	-17.8	1.18 H	131	9.53	46.67
8	7266.00	44.0 AV	54.0	-10.0	1.18 H	131	-2.67	46.67

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.7 PK	74.0	-4.3	1.47 V	142	38.04	31.66
2	2390.00	51.4 AV	54.0	-2.6	1.47 V	142	19.74	31.66
3	*2422.00	102.9 PK			1.69 V	117	71.14	31.76
4	*2422.00	91.3 AV			1.69 V	117	59.54	31.76
5	4844.00	53.7 PK	74.0	-20.3	1.37 V	355	14.66	39.04
6	4844.00	37.7 AV	54.0	-16.3	1.37 V	355	-1.34	39.04
7	7266.00	56.9 PK	74.0	-17.1	1.21 V	342	10.23	46.67
8	7266.00	45.2 AV	54.0	-8.8	1.21 V	342	-1.47	46.67

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	102.0 PK			1.47 H	69	70.19	31.81
2	*2437.00	89.9 AV			1.47 H	69	58.09	31.81
3	4874.00	51.5 PK	74.0	-22.5	1.00 H	147	12.36	39.14
4	4874.00	36.6 AV	54.0	-17.4	1.00 H	147	-2.54	39.14
5	7311.00	56.1 PK	74.0	-17.9	1.14 H	120	9.47	46.63
6	7311.00	44.2 AV	54.0	-9.8	1.14 H	120	-2.43	46.63

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	102.9 PK			1.65 V	119	71.09	31.81
2	*2437.00	91.1 AV			1.65 V	119	59.29	31.81
3	4874.00	53.6 PK	74.0	-20.4	1.36 V	357	14.46	39.14
4	4874.00	37.5 AV	54.0	-16.5	1.36 V	357	-1.64	39.14
5	7311.00	57.2 PK	74.0	-16.8	1.23 V	338	10.57	46.63
6	7311.00	45.4 AV	54.0	-8.6	1.23 V	338	-1.23	46.63

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	102.4 PK			1.45 H	64	70.54	31.86
2	*2452.00	90.3 AV			1.45 H	64	58.44	31.86
3	2483.50	65.3 PK	74.0	-8.7	1.45 H	64	33.33	31.97
4	2483.50	50.4 AV	54.0	-3.6	1.45 H	64	18.43	31.97
5	4904.00	51.8 PK	74.0	-22.2	1.00 H	135	12.56	39.24
6	4904.00	37.1 AV	54.0	-16.9	1.00 H	135	-2.14	39.24
7	7356.00	55.4 PK	74.0	-18.6	1.15 H	120	8.79	46.61
8	7356.00	43.8 AV	54.0	-10.2	1.15 H	120	-2.81	46.61

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	103.3 PK			1.47 V	242	71.44	31.86
2	*2452.00	91.4 AV			1.47 V	242	59.54	31.86
3	2483.50	70.7 PK	74.0	-3.3	1.47 V	245	38.73	31.97
4	2483.50	53.3 AV	54.0	-0.7	1.47 V	245	21.33	31.97
5	4904.00	54.3 PK	74.0	-19.7	1.40 V	344	15.06	39.24
6	4904.00	37.9 AV	54.0	-16.1	1.40 V	344	-1.34	39.24
7	7356.00	57.3 PK	74.0	-16.7	1.25 V	335	10.69	46.61
8	7356.00	45.7 AV	54.0	-8.3	1.25 V	335	-0.91	46.61

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP 40	100060	May 09, 2012	May 08, 2013

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : May 14, 2012


4.3.3 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = approximately 1% of the emission bandwidth
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



A D T

4.3.7 TEST RESULTS

802.11b

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	12.51	12.59	0.5	PASS
6	2437	12.58	12.53	0.5	PASS
11	2462	12.37	12.52	0.5	PASS

802.11g

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	16.57	16.59	0.5	PASS
6	2437	16.57	16.54	0.5	PASS
11	2462	16.52	16.57	0.5	PASS

802.11n (20MHz)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	17.76	17.81	0.5	PASS
6	2437	17.92	17.84	0.5	PASS
11	2462	17.81	17.80	0.5	PASS

802.11n (40MHz)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
3	2422	36.59	36.77	0.5	PASS
6	2437	36.47	36.24	0.5	PASS
9	2452	36.87	36.57	0.5	PASS

4.4 OCCUPIED BANDWIDTH MEASUREMENT

4.4.1 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP 40	100060	May 09, 2012	May 08, 2013

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : May 14, 2012


4.4.2 TEST PROCEDURE

- 1) Set RBW \geq 1% of the emission bandwidth.
- 2) Set the VBW \geq 3 x RBW.
- 3) Detector = Peak.
- 4) Trace mode = max hold.
- 5) Record the 99% emission bandwidth.

4.4.3 DEVIATION FROM TEST STANDARD

No deviation

4.4.4 TEST SETUP



4.4.5 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.4.6 TEST RESULTS

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	OCCUPIED BANDWIDTH (MHz)	
		CHAIN 0	CHAIN 1
1	2412	15.50	15.60
6	2437	15.50	15.60
11	2462	15.60	15.50

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	OCCUPIED BANDWIDTH (MHz)	
		CHAIN 0	CHAIN 1
1	2412	16.90	17.00
6	2437	17.00	17.00
11	2462	17.00	17.00

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	OCCUPIED BANDWIDTH (MHz)	
		CHAIN 0	CHAIN 1
1	2412	18.10	18.30
6	2437	18.20	18.20
11	2462	18.20	18.30

802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	OCCUPIED BANDWIDTH (MHz)	
		CHAIN 0	CHAIN 1
3	2422	36.40	36.20
6	2437	36.40	36.40
9	2452	36.40	36.40



A D T

4.5 CONDUCTED OUTPUT POWER MEASUREMENT

4.5.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

4.5.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Power Meter	ML2495A	0824006	May 10, 2012	May 09, 2013
Peak Power Sensor	MA2411B	0738172	May 10, 2012	May 09, 2013

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : May 14, 2012


4.5.3 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the peak power level.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP

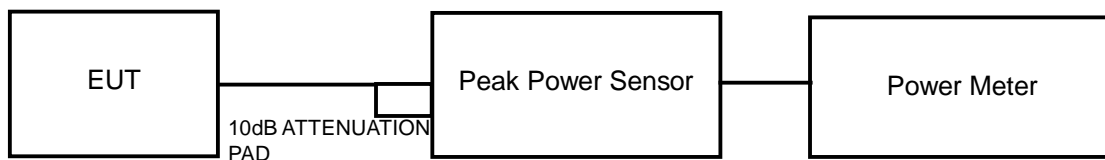

4.5.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



4.5.7 TEST RESULTS

802.11b

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	16.30	16.90	91.636	19.62	30	PASS
6	2437	16.50	16.30	87.326	19.41	30	PASS
11	2462	15.70	15.30	71.038	18.51	30	PASS

Note: Directional gain = gain of antenna element + 10 log (# of TX antenna elements)
 Effective Legacy Gain (dBi) = 5.01
 The effective legacy gain is 5.01dBi, therefore the limit doesn't reduce.

802.11g

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	22.80	22.80	381.092	25.81	30	PASS
6	2437	22.90	22.70	381.193	25.81	30	PASS
11	2462	22.10	22.10	324.362	25.11	30	PASS

Note: Directional gain = gain of antenna element + 10 log (# of TX antenna elements)
 Effective Legacy Gain (dBi) = 5.01
 The effective legacy gain is 5.01dBi, therefore the limit doesn't reduce.

802.11n (20MHz)

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	22.60	22.40	355.750	25.51	30	PASS
6	2437	22.70	23.20	395.139	25.97	30	PASS
11	2462	23.20	23.10	413.104	26.16	30	PASS

Note: Directional gain = gain of antenna element + 10 log (# of TX antenna elements)
 Effective Legacy Gain (dBi) = 5.01
 The effective legacy gain is 5.01dBi, therefore the limit doesn't reduce.



A D T

802.11n (40MHz)

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
3	2422	22.60	22.90	376.954	25.76	30	PASS
6	2437	22.50	22.40	351.608	25.46	30	PASS
9	2452	22.70	22.50	364.037	25.61	30	PASS

Note: Directional gain = gain of antenna element + 10 log (# of TX antenna elements)
Effective Legacy Gain (dBi) = 5.01
The effective legacy gain is 5.01dBi, therefore the limit doesn't reduce.

4.6 POWER SPECTRAL DENSITY MEASUREMENT

4.6.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP 40	100060	May 09, 2012	May 08, 2013

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : May 14, 2012


4.6.3 TEST PROCEDURE

1. Set the RBW = 100 kHz, VBW =300 kHz, Detector = peak.
2. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
3. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
4. Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(3 \text{ kHz}/100\text{kHz})$

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP



4.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6



A D T

4.6.7 TEST RESULTS

802.11b

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	3.21	-12.02	3.01	-9.01	8	PASS
	6	2437	3.47	-11.76	3.01	-8.75	8	PASS
	11	2462	4.22	-11.01	3.01	-8.00	8	PASS
1	1	2412	4.67	-10.56	3.01	-7.55	8	PASS
	6	2437	3.49	-11.74	3.01	-8.73	8	PASS
	11	2462	2.49	-12.74	3.01	-9.73	8	PASS

Note: Directional gain = gain of antenna element + 10 log (# of TX antenna elements)
 Effective Legacy Gain (dBi) = 5.01
 The effective legacy gain is 5.01dBi, therefore the limit doesn't reduce.

802.11g

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	2.07	-13.16	3.01	-10.15	8	PASS
	6	2437	1.98	-13.25	3.01	-10.24	8	PASS
	11	2462	1.77	-13.46	3.01	-10.45	8	PASS
1	1	2412	0.42	-14.81	3.01	-11.80	8	PASS
	6	2437	2.54	-12.69	3.01	-9.68	8	PASS
	11	2462	2.07	-13.16	3.01	-10.15	8	PASS

Note: Directional gain = gain of antenna element + 10 log (# of TX antenna elements)
 Effective Legacy Gain (dBi) = 5.01
 The effective legacy gain is 5.01dBi, therefore the limit doesn't reduce.

802.11n (20MHz)

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	0.96	-14.27	3.01	-11.26	8	PASS
	6	2437	1.51	-13.72	3.01	-10.71	8	PASS
	11	2462	1.83	-13.40	3.01	-10.39	8	PASS
1	1	2412	0.54	-14.69	3.01	-11.68	8	PASS
	6	2437	1.71	-13.52	3.01	-10.51	8	PASS
	11	2462	1.69	-13.54	3.01	-10.53	8	PASS

Note: Directional gain = gain of antenna element + 10 log (# of TX antenna elements)
 Effective Legacy Gain (dBi) = 5.01
 The effective legacy gain is 5.01dBi, therefore the limit doesn't reduce.



A D T

802.11n (40MHz)

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	3	2422	-2.08	-17.31	3.01	-14.30	8	PASS
	6	2437	-1.72	-16.95	3.01	-13.94	8	PASS
	9	2452	-1.88	-17.11	3.01	-14.10	8	PASS
1	3	2422	-2.24	-17.47	3.01	-14.46	8	PASS
	6	2437	-1.64	-16.87	3.01	-13.86	8	PASS
	9	2452	-1.81	-17.04	3.01	-14.03	8	PASS

Note: Directional gain = gain of antenna element + 10 log (# of TX antenna elements)
Effective Legacy Gain (dBi) = 5.01
The effective legacy gain is 5.01dBi, therefore the limit doesn't reduce.



A D T

4.7 CONDUCTED OUT-BAND EMISSION MEASUREMENT

4.7.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP 40	100060	May 09, 2012	May 08, 2013

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : May 14, 2012

4.7.3 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.


MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.7.4 DEVIATION FROM TEST STANDARD

No deviation

4.7.5 TEST SETUP



4.7.6 EUT OPERATING CONDITION

Same as Item 4.3.6

4.7.7 TEST RESULTS

The conducted emission test is performed on each TX port of operating mode without summing or adding $10\log(N)$ since the limit is relative emission limit. Only worst data of each operating mode is presented.


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.




A D T

802.11b

CH 1

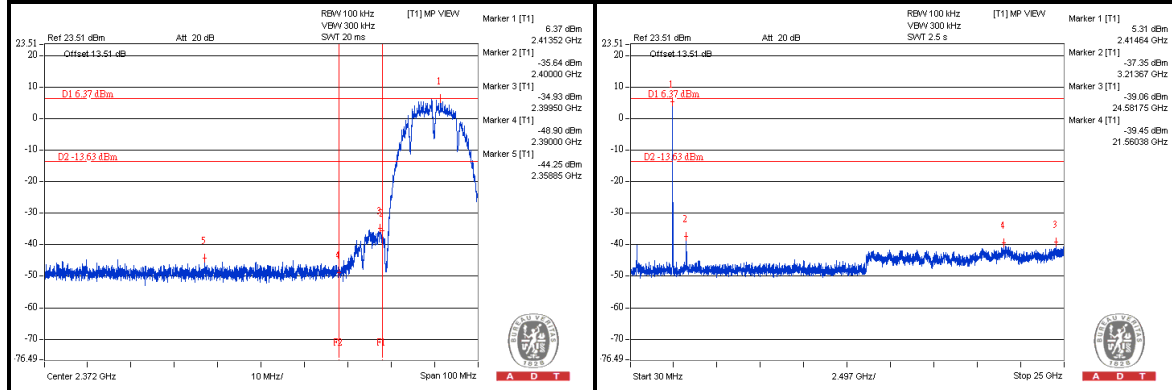

CH 11


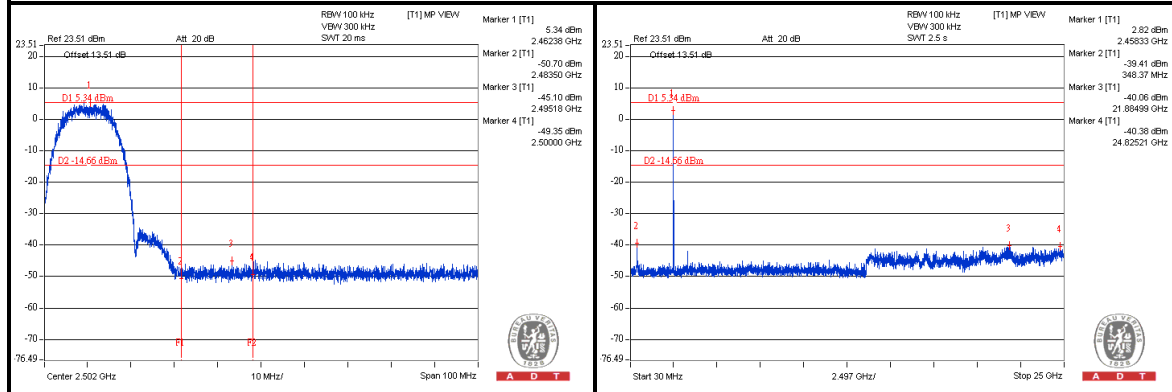






A D T

802.11g

CH 1

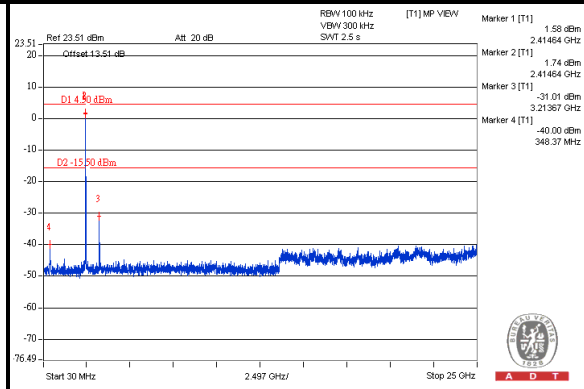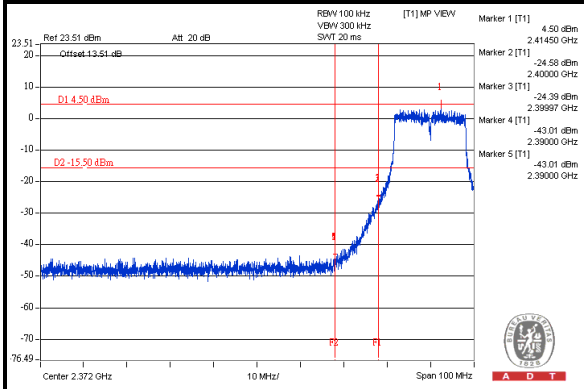

CH 11

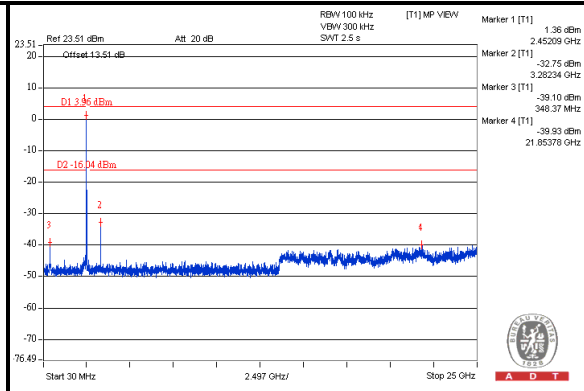
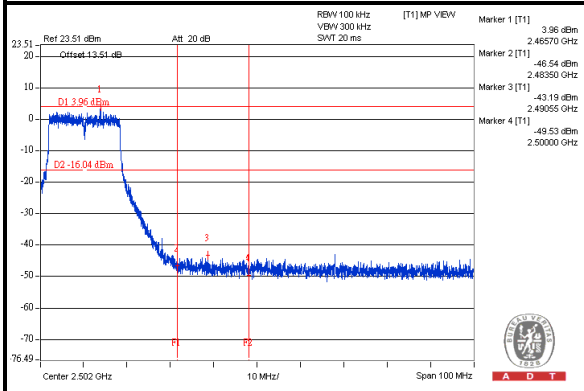






A D T

802.11n (20MHz)

CH 1

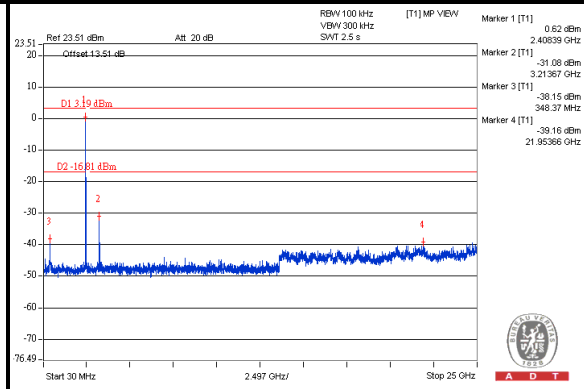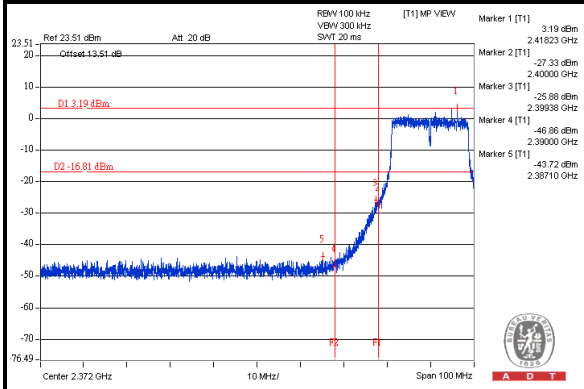

CH 11

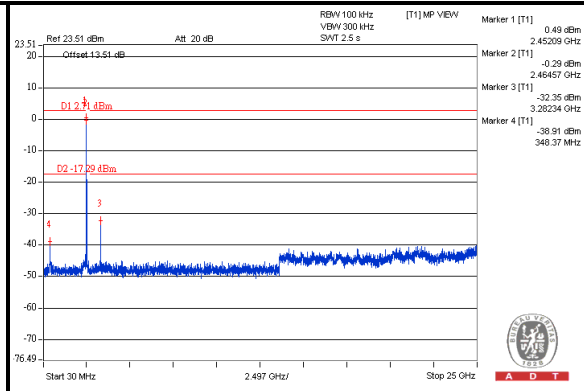
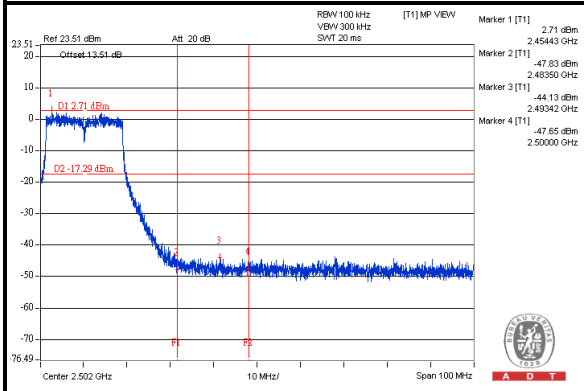






A D T

802.11n (40MHz)

CH 3

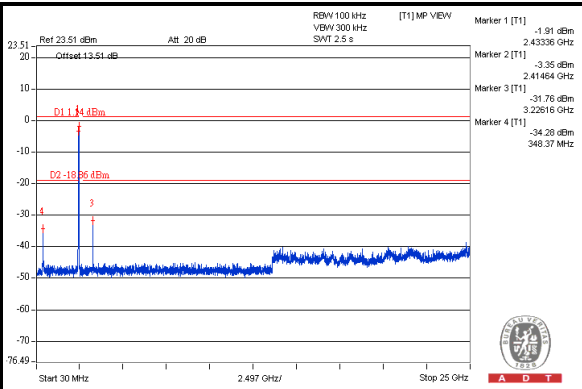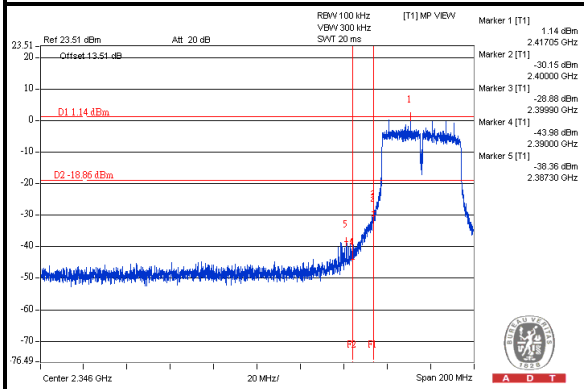

CH 9

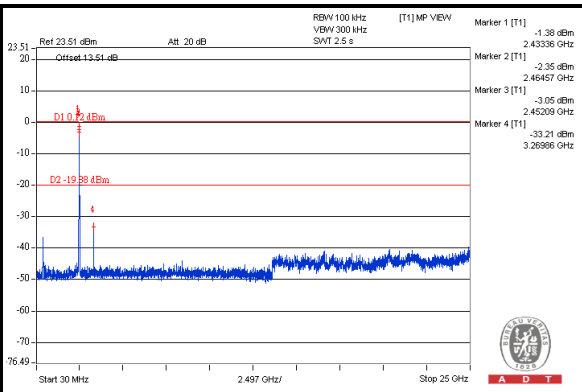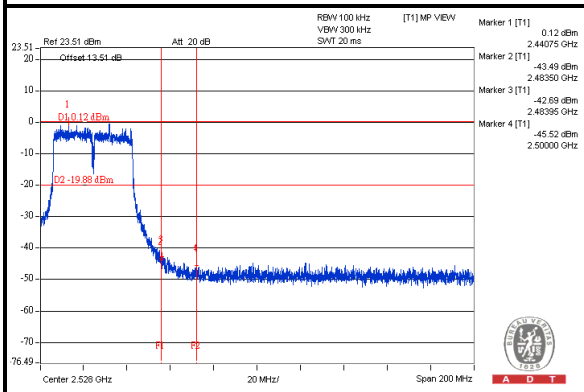



A D T

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).





6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation and authorization certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5.phtml.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



A D T

7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

--- END ---