



料号:

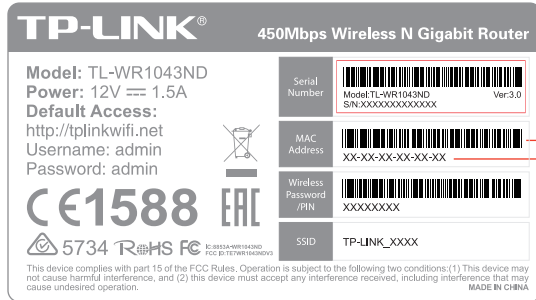


条形码由“XXXXXXXXXXXX”生成
文本写成“XX-XX-XX-XX-XX-XX”形式

70.5*39.5mm, R1.5, 公差: ±0.2mm

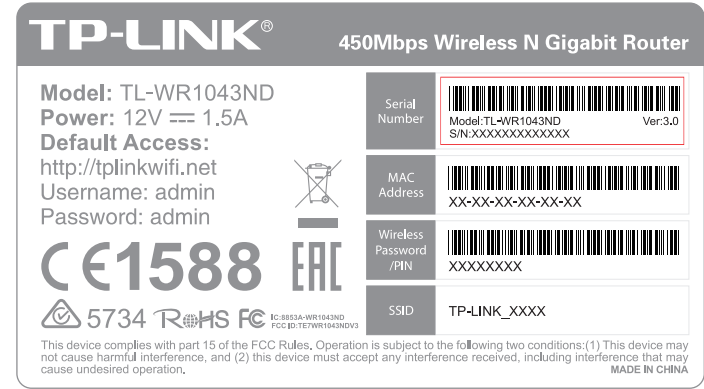

放大效果图

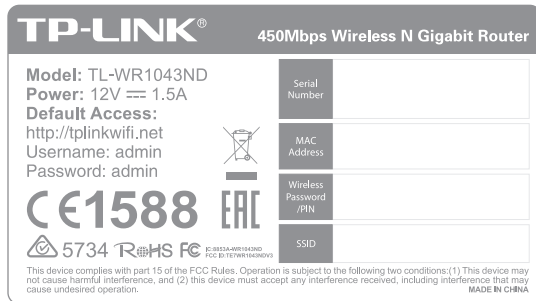


文件已转曲 (供应商来料效果图)

备注:

- 1) S/N码由工厂用25*7空白标贴 (7210500003) 打印, 贴于产品规格标贴指定位置; MAC地址和Wireless Password/PIN由工厂直接打印于产品规格标贴指定位置。
- 2) SSID编码规则: 2.4GHz为TP-LINK_XXXX, “XXXX” 表示LAN MAC地址后四位。如: LAN MAC: 123123120003 SSID: TP-LINK_0003,
- 3) 图示条码均为示意, 具体请以生产实际为准。

卷装供货
跳距: 3mm
边距: 3mm
文字正方向出纸



普联技术有限公司 TP-LINK TECHNOLOGIES CO., LTD.			
名称	TL-WR1043ND (UN) 3.0 产品规格标贴	Logo	白色
版本	A1	颜色	底色 PANTONE COOL GRAY 9G/白色 文字 PANTONE COOL GRAY 9G/白色
材质	80g艾利铜版纸+雾膜	其它	PANTONE COOL GRAY 2U
模具	美F-225	审核	结构工程师 硬件工程师 产品工程师 平面负责人
机型版本号	TL-WR1043ND (UN) 3.0	设计	罗汝婷
完成日期	2015-1-15	记录	与上一版的区别

Label location

TP-LINK® 300Mbps Wireless N Gigabit Router

Model: TL-WR1043ND
Power: 12V \approx 1.5A
Default Access:
<http://tplinklogin.net>
Username: admin
Password: admin

Serial Number	 Model: TL-WR1043ND v14.0.0 S/N: 1888800512
MAC Address	 8456B3BE 19FA
Product ID	 00229456

CE 1588 FC
RoHS 5734

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
1) This device may not cause harmful interference, and
2) This device must accept any interference received,
including interference that may cause undesired operation.

MADE IN CHINA