



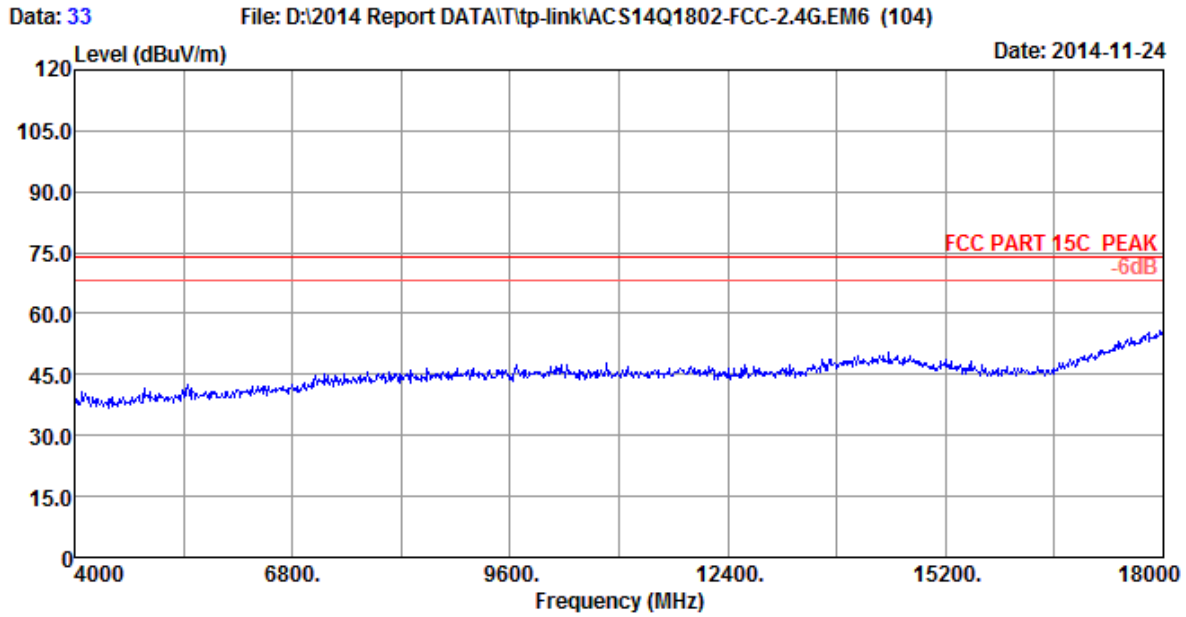


Site no.	: 3m Chamber	Data No.	: 33
Dis. / Ant.	: 3m 2014 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Leo-Li
EUT	: 150Mbps Wireless N Router		
Power Rating	: DC 5V From Adapter Input AC 120V/60Hz		
Test Mode	: IEEE802.11g 2412MHz Tx		
	: TL-WR740N		

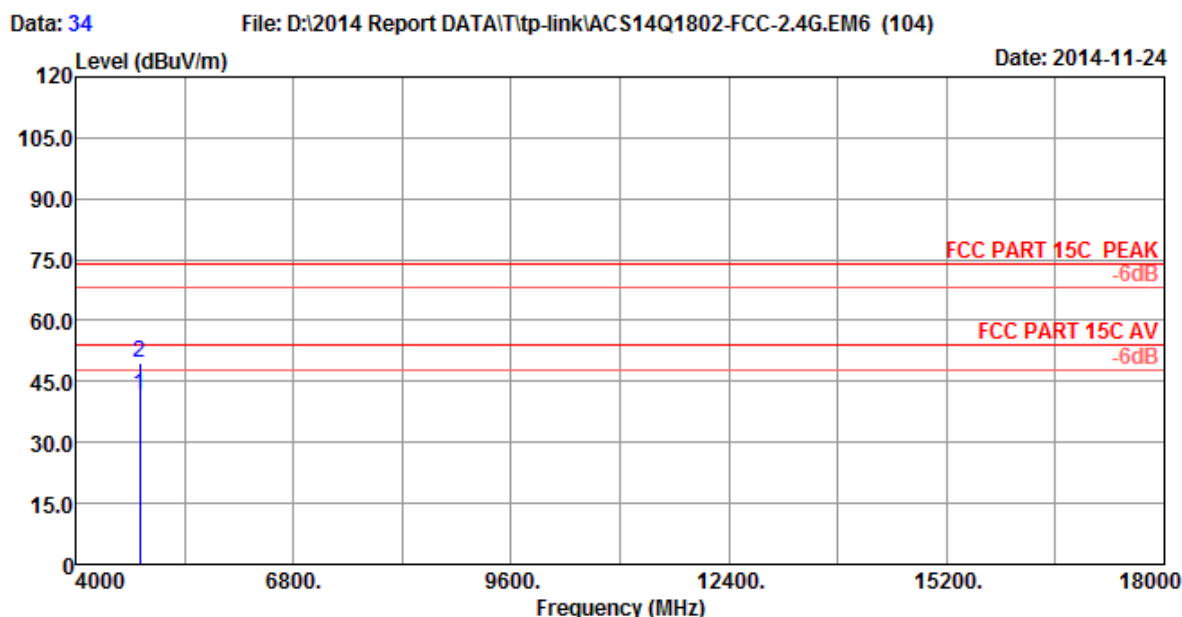


Site no. : 3m Chamber Data No. : 34
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2412MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	32.88	8.58	35.75	35.70	41.51	54.00	12.49	Average
2	4824.000	32.88	8.58	43.75	35.70	49.51	74.00	24.49	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.
 2. The emission levels that are 20dB below the official limit are not reported.

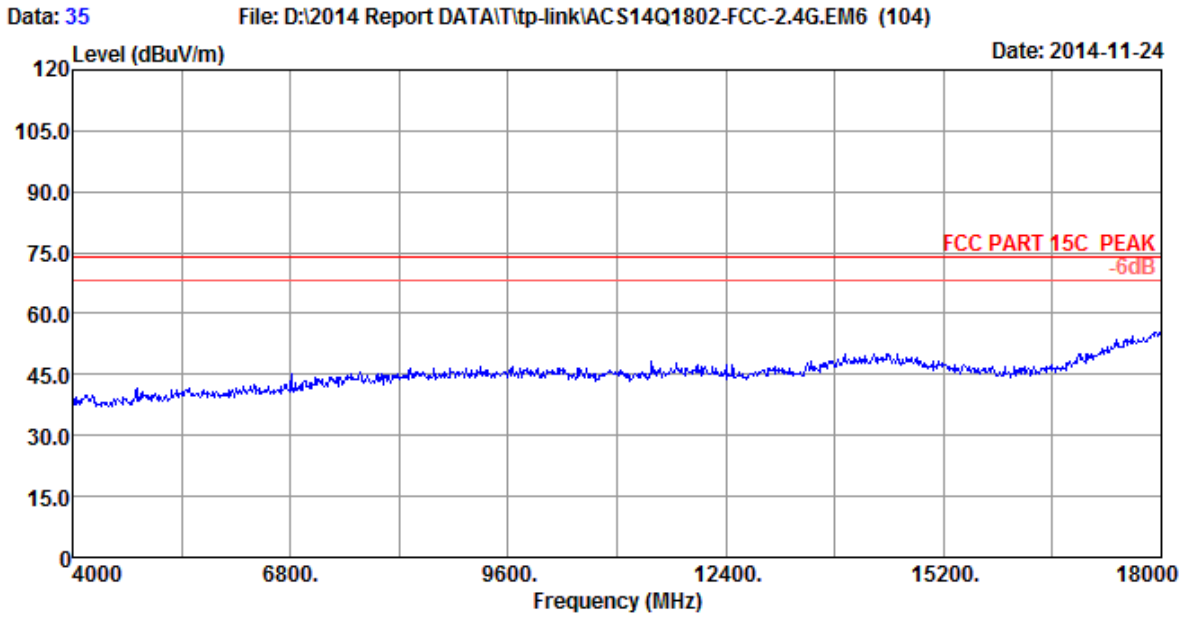


Site no.	: 3m Chamber	Data No.	: 35
Dis. / Ant.	: 3m 2014 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Leo-Li
EUT	: 150Mbps Wireless N Router		
Power Rating	: DC 5V From Adapter Input AC 120V/60Hz		
Test Mode	: IEEE802.11g 2412MHz Tx		
	TL-WR740N		

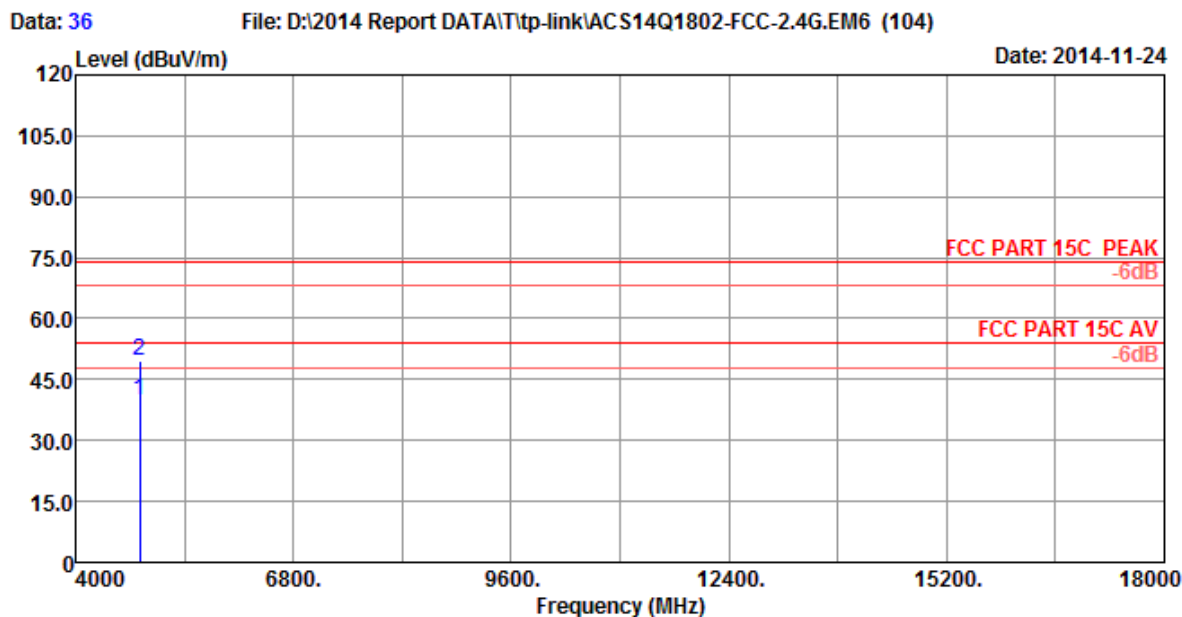


Site no. : 3m Chamber Data No. : 36
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2412MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	32.88	8.58	33.96	35.70	39.72	54.00	14.28	Average
2	4824.000	32.88	8.58	43.96	35.70	49.72	74.00	24.28	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.
 2. The emission levels that are 20dB below the official limit are not reported.

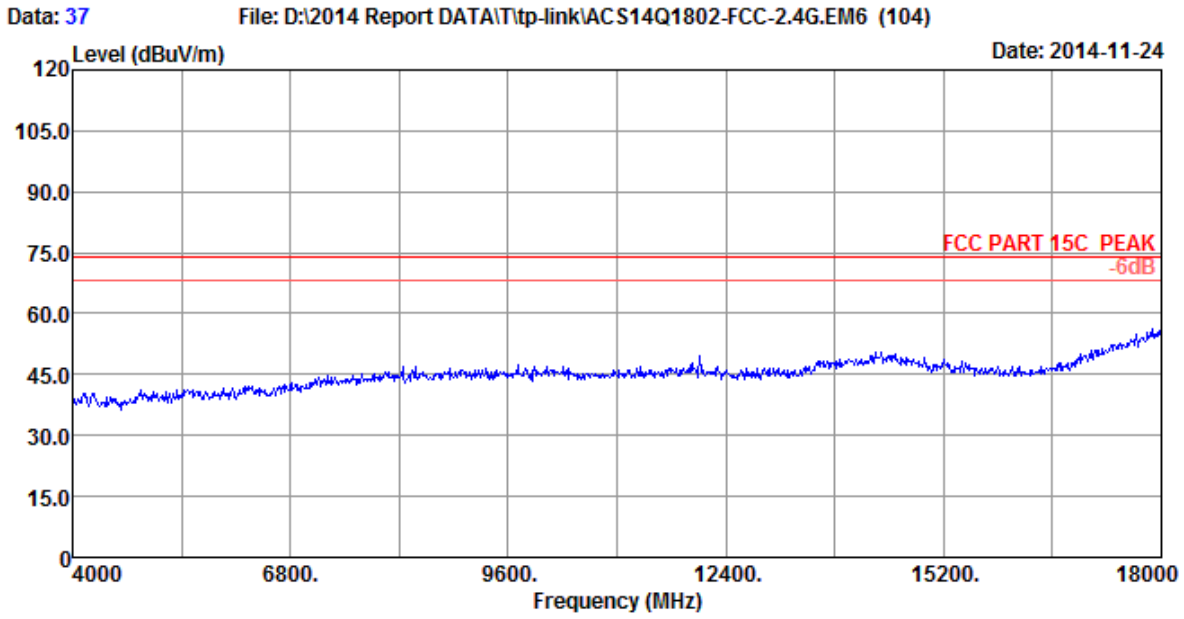


Site no.	: 3m Chamber	Data No.	: 37
Dis. / Ant.	: 3m 2014 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Leo-Li
EUT	: 150Mbps Wireless N Router		
Power Rating	: DC 5V From Adapter Input AC 120V/60Hz		
Test Mode	: IEEE802.11g 2437MHz Tx		
	TL-WR740N		

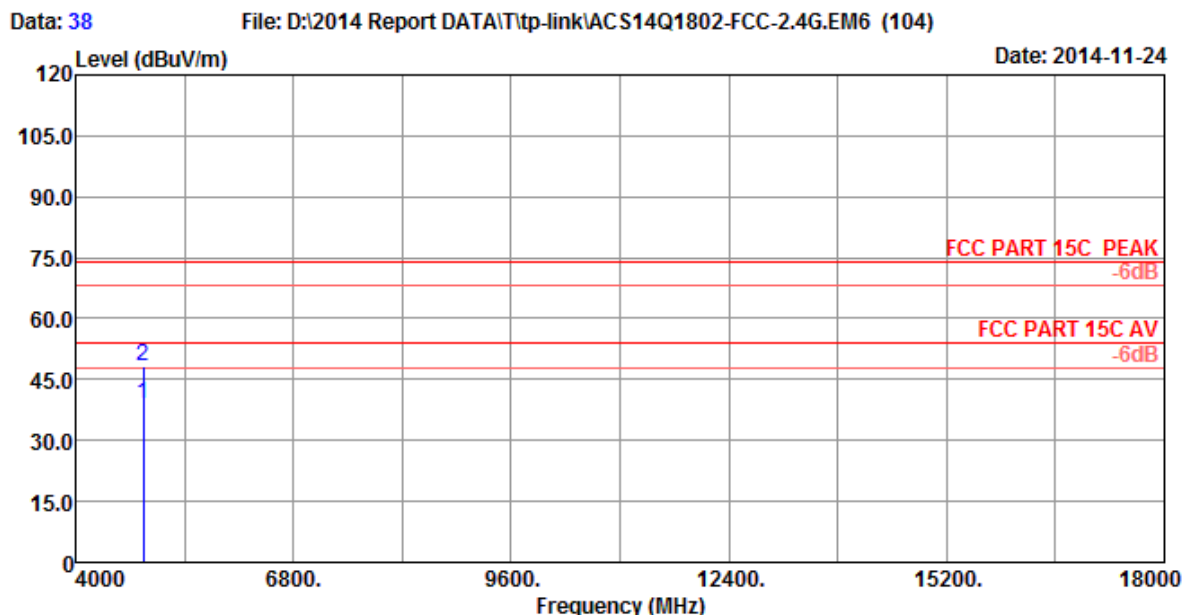


Site no. : 3m Chamber Data No. : 38
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2437MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	32.97	8.63	33.24	35.70	39.14	54.00	14.86	Average
2	4874.000	32.97	8.63	42.24	35.70	48.14	74.00	25.86	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.
 2. The emission levels that are 20dB below the official limit are not reported.

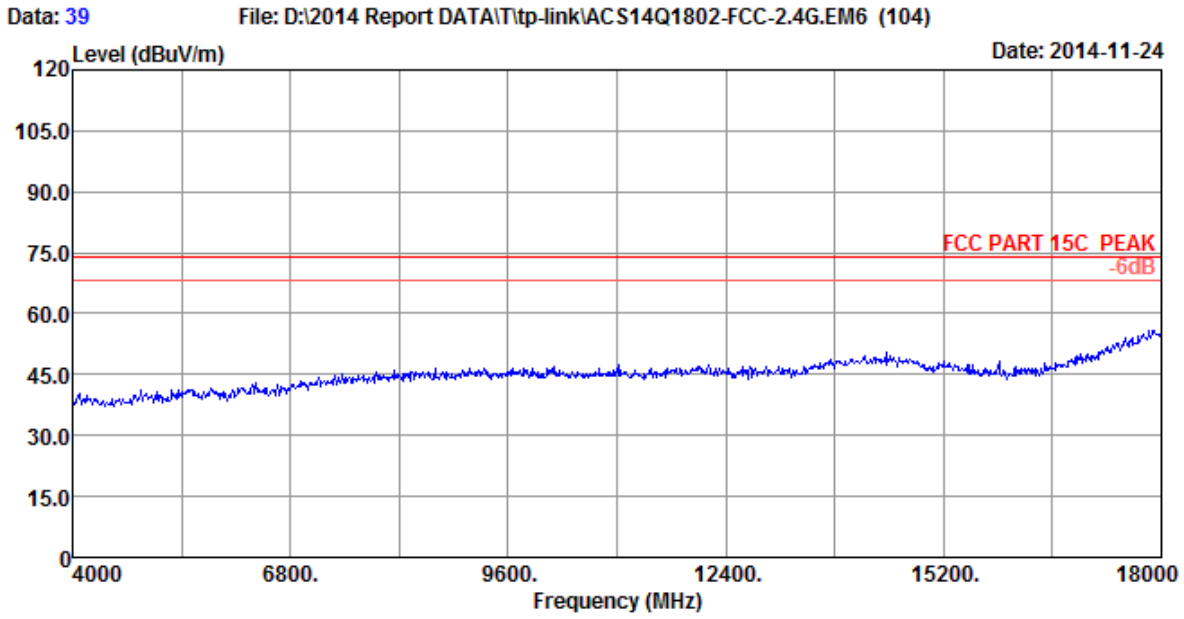


Site no.	: 3m Chamber	Data No.	: 39
Dis. / Ant.	: 3m 2014 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Leo-Li
EUT	: 150Mbps Wireless N Router		
Power Rating	: DC 5V From Adapter Input AC 120V/60Hz		
Test Mode	: IEEE802.11g 2437MHz Tx		
	TL-WR740N		

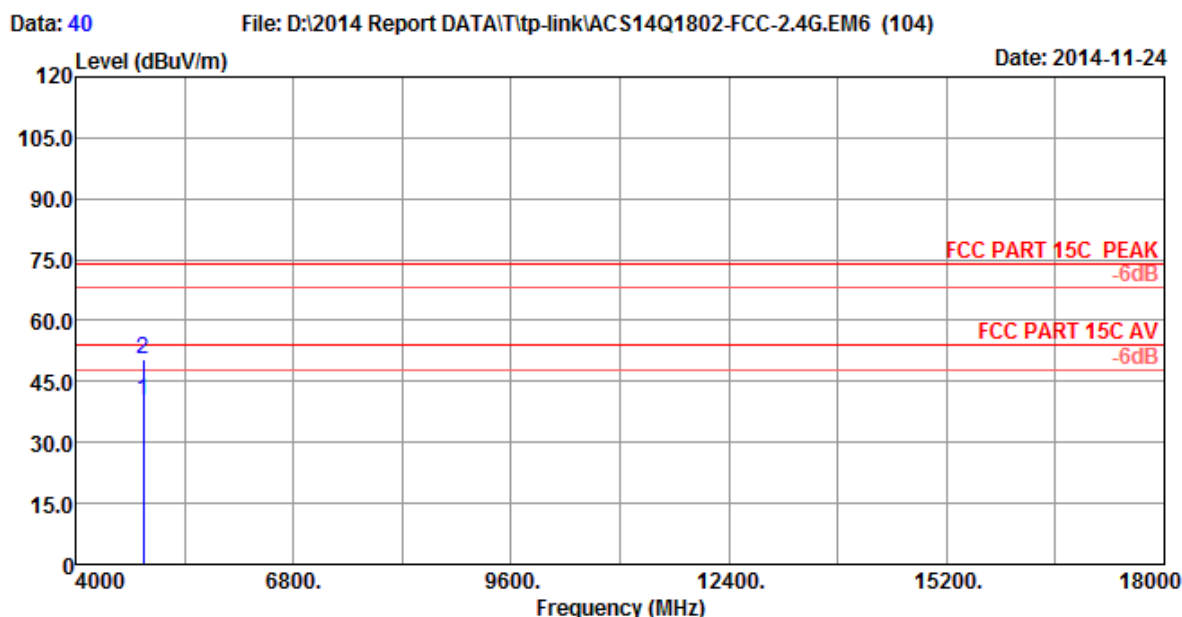

Site no. : 3m Chamber Data No. : 40
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2437MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	32.97	8.63	34.40	35.70	40.30	54.00	13.70	Average
2	4874.000	32.97	8.63	44.40	35.70	50.30	74.00	23.70	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.
 2. The emission levels that are 20dB below the official limit are not reported.

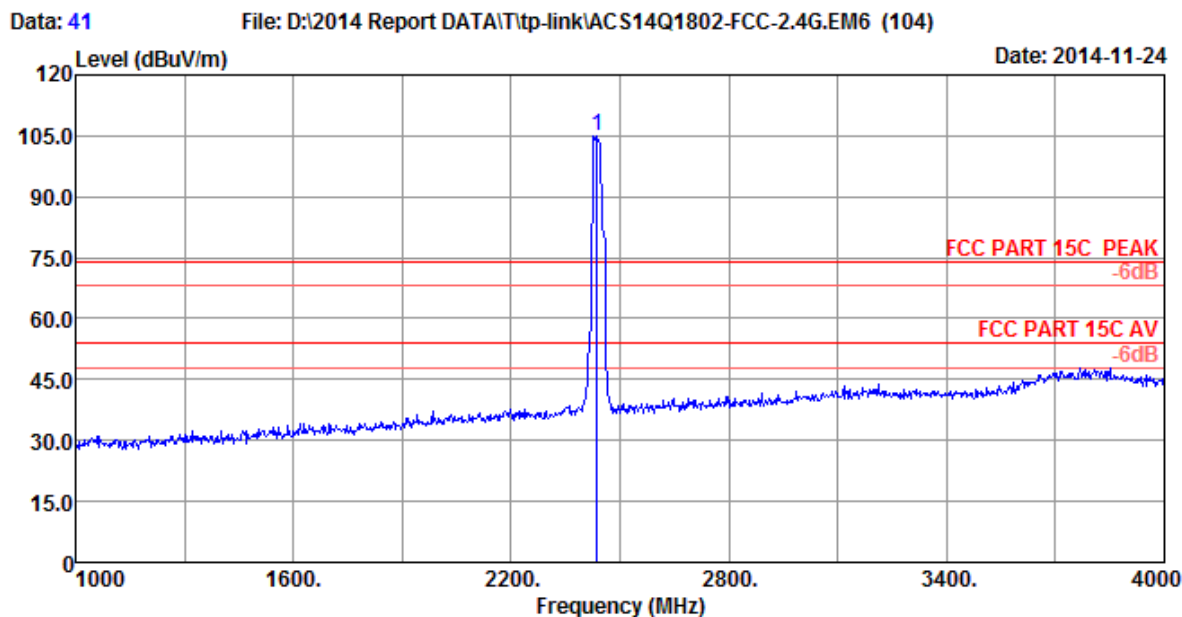


Site no. : 3m Chamber Data No. : 41
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2437MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Amp Factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2437.000	28.26	5.85	106.55	35.70	104.96	74.00	-30.96	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.


2. The emission levels that are 20dB below the official limit are not reported.

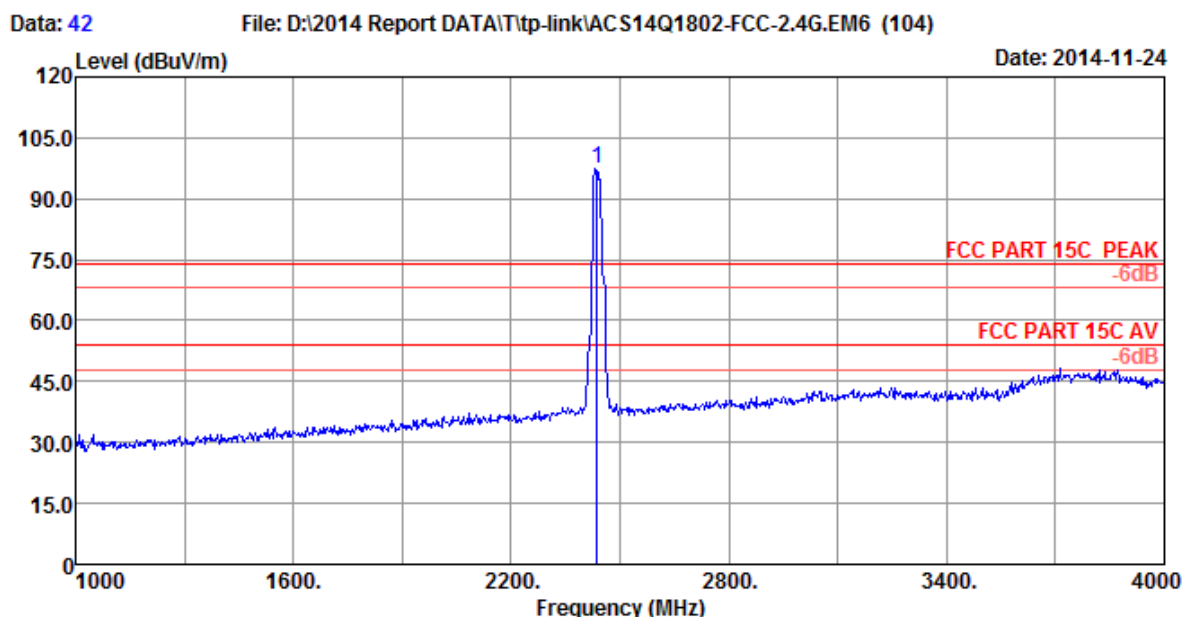

Site no. : 3m Chamber Data No. : 42
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2437MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.000	28.26	5.85	99.06	35.70	97.47	74.00	-23.47	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.
 2. The emission levels that are 20dB below the official limit are not reported.

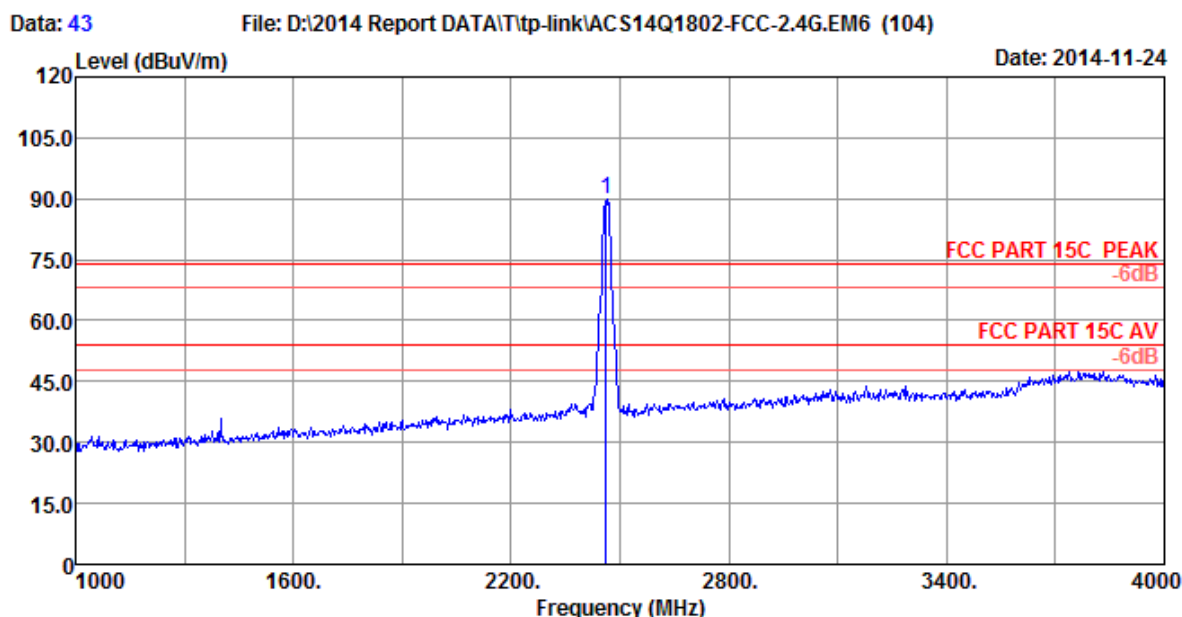


Site no. : 3m Chamber Data No. : 43
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx
 TL-WR740N

	Freq.	Ant.	Cable		Amp	Emission			
	(MHz)	Factor	Loss	Reading	Factor	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dBUV)	(dB)	(dBUV/m)	(dBUV/m)	(dB)	
1	2462.000	28.32	5.89	91.51	35.70	90.02	74.00	-16.02	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.

2. The emission levels that are 20dB below the official limit are not reported.

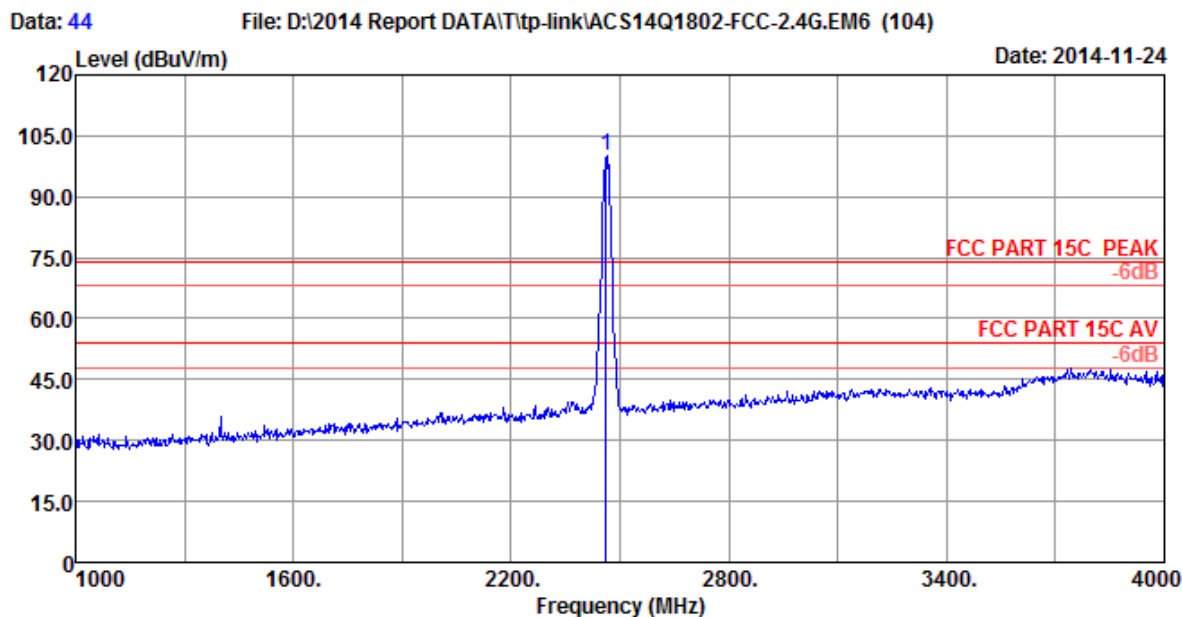


Site no. : 3m Chamber Data No. : 44
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx
 TL-WR740N


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.000	28.32	5.89	101.36	35.70	99.87	74.00	-25.87	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.

2. The emission levels that are 20dB below the official limit are not reported.

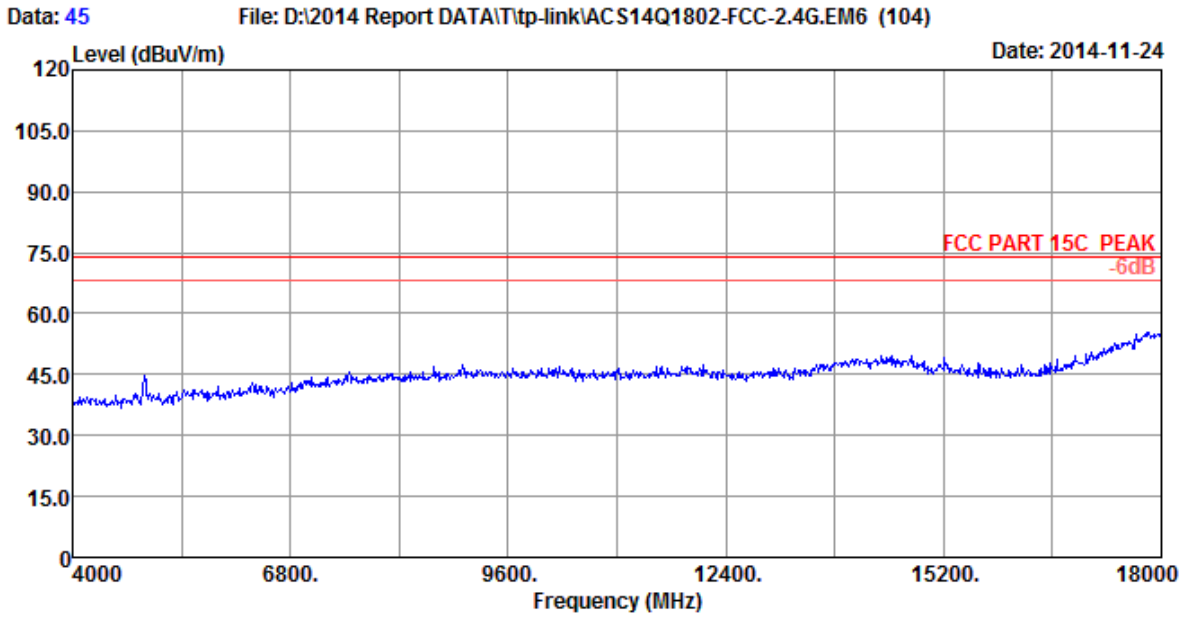


Site no.	: 3m Chamber	Data No.	: 45
Dis. / Ant.	: 3m 2014 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Leo-Li
EUT	: 150Mbps Wireless N Router		
Power Rating	: DC 5V From Adapter Input AC 120V/60Hz		
Test Mode	: IEEE802.11g 2462MHz Tx		
	TL-WR740N		

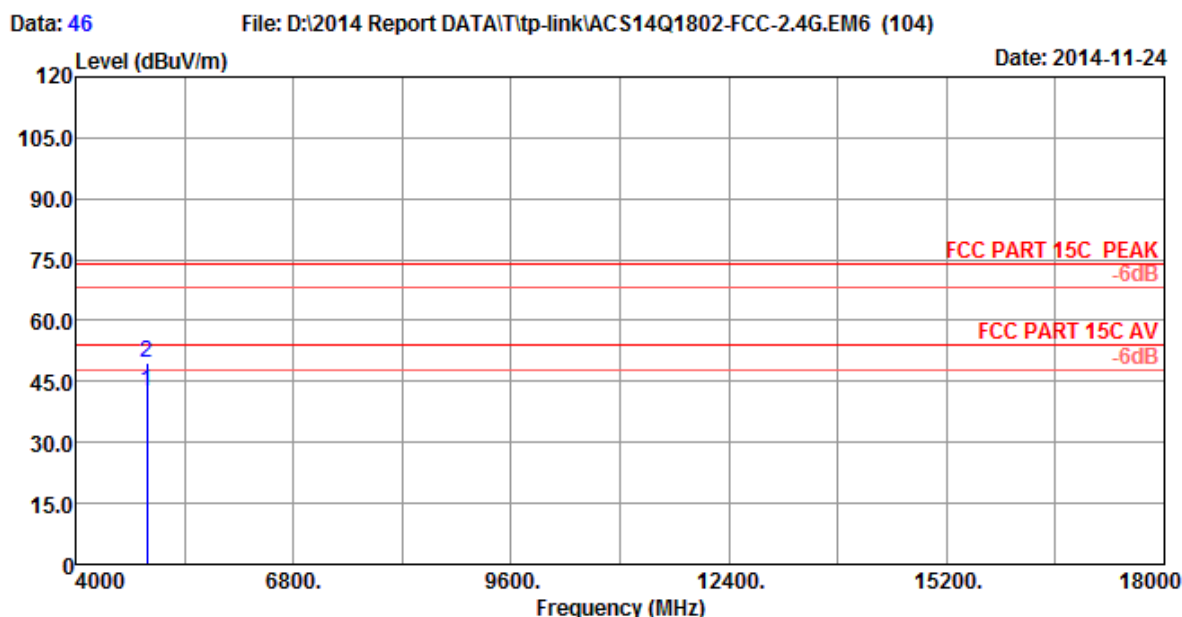


Site no. : 3m Chamber Data No. : 46
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.000	33.06	8.69	36.54	35.70	42.59	54.00	11.41	Average
2	4924.000	33.06	8.69	43.54	35.70	49.59	74.00	24.41	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.
 2. The emission levels that are 20dB below the official limit are not reported.

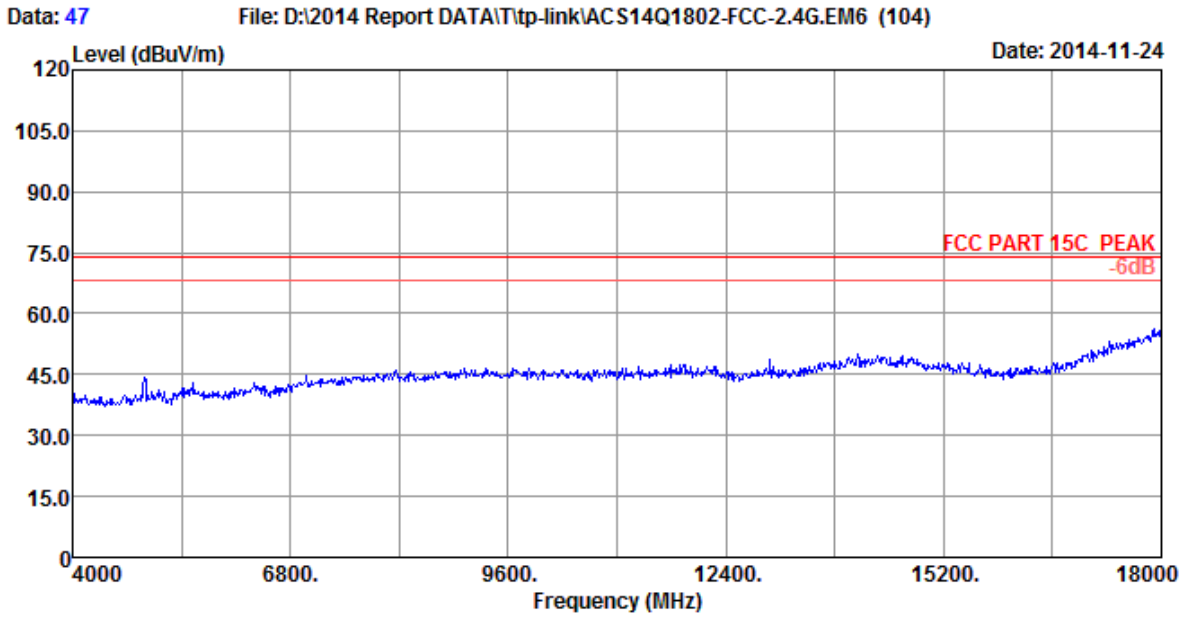


Site no.	: 3m Chamber	Data No.	: 47
Dis. / Ant.	: 3m 2014 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Leo-Li
EUT	: 150Mbps Wireless N Router		
Power Rating	: DC 5V From Adapter Input AC 120V/60Hz		
Test Mode	: IEEE802.11g 2462MHz Tx		
	TL-WR740N		

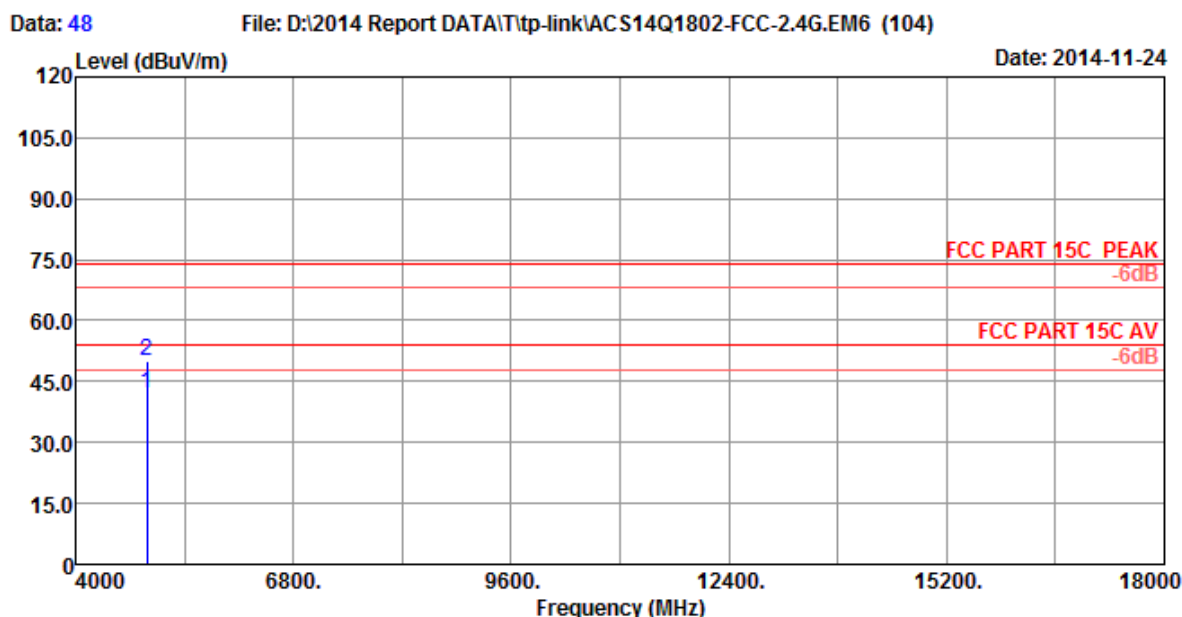

Site no. : 3m Chamber Data No. : 48
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.000	33.06	8.69	36.11	35.70	42.16	54.00	11.84	Average
2	4924.000	33.06	8.69	44.11	35.70	50.16	74.00	23.84	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.
 2. The emission levels that are 20dB below the official limit are not reported.

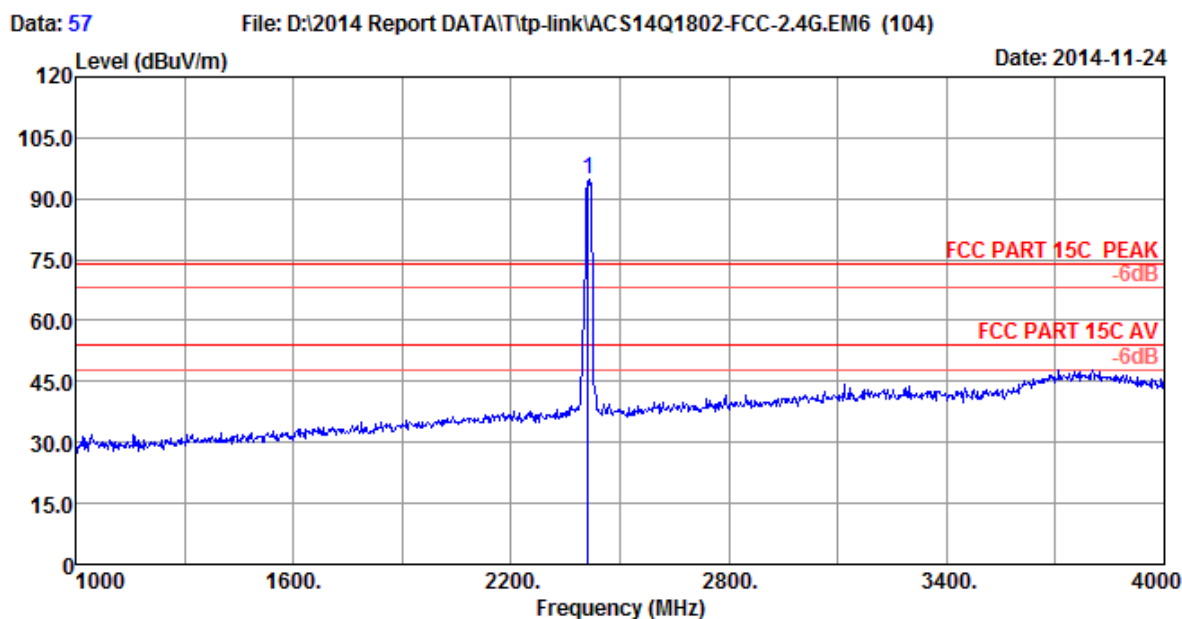

Site no. : 3m Chamber Data No. : 57
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2412MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.000	28.21	5.81	96.36	35.70	94.68	74.00	-20.68	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.
 2. The emission levels that are 20dB below the official limit are not reported.

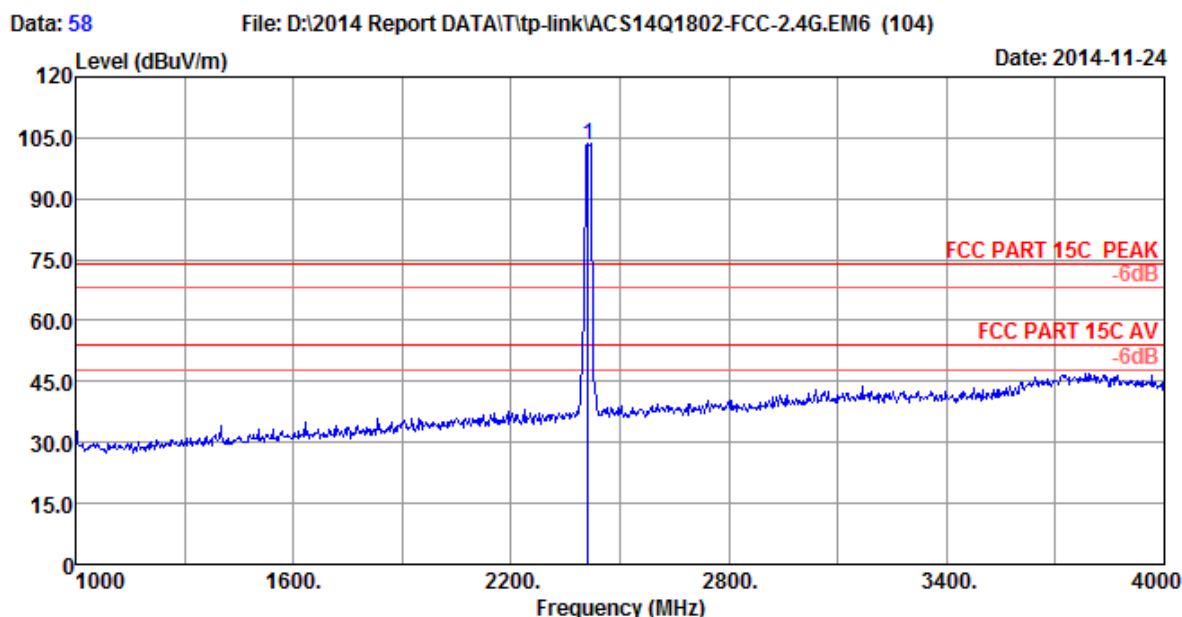


Site no. : 3m Chamber Data No. : 58
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2412MHz Tx
 TL-WR740N


Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2412.000	28.21	5.81	104.97	35.70	103.29	74.00	-29.29	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.

2. The emission levels that are 20dB below the official limit are not reported.

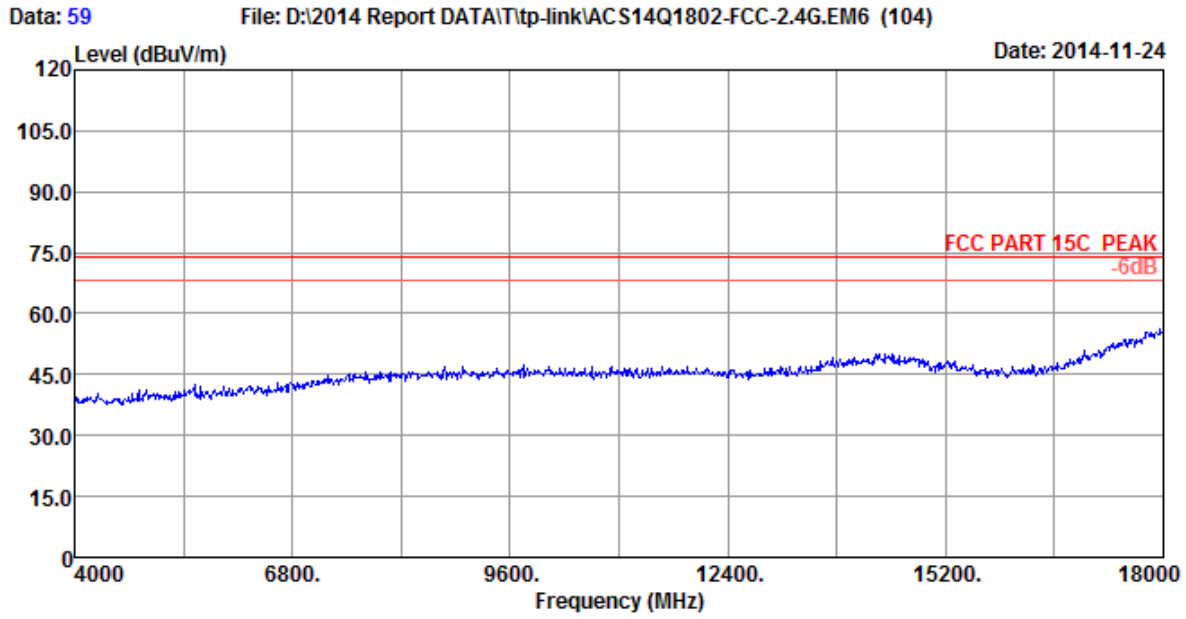


Site no.	: 3m Chamber	Data No.	: 59
Dis. / Ant.	: 3m 2014 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Leo-Li
EUT	: 150Mbps Wireless N Router		
Power Rating	: DC 5V From Adapter Input AC 120V/60Hz		
Test Mode	: IEEE802.11nHT20 2412MHz Tx		
	TL-WR740N		

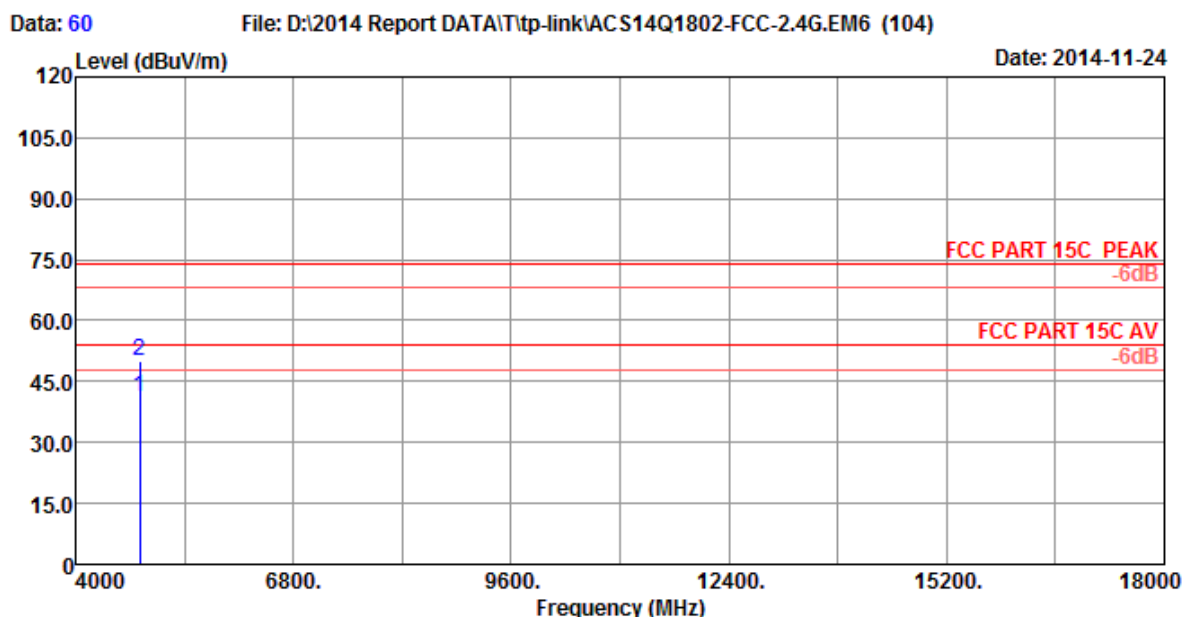


Site no. : 3m Chamber Data No. : 60
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2412MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	32.88	8.58	35.47	35.70	41.23	54.00	12.77	Average
2	4824.000	32.88	8.58	44.47	35.70	50.23	74.00	23.77	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.
 2. The emission levels that are 20dB below the official limit are not reported.

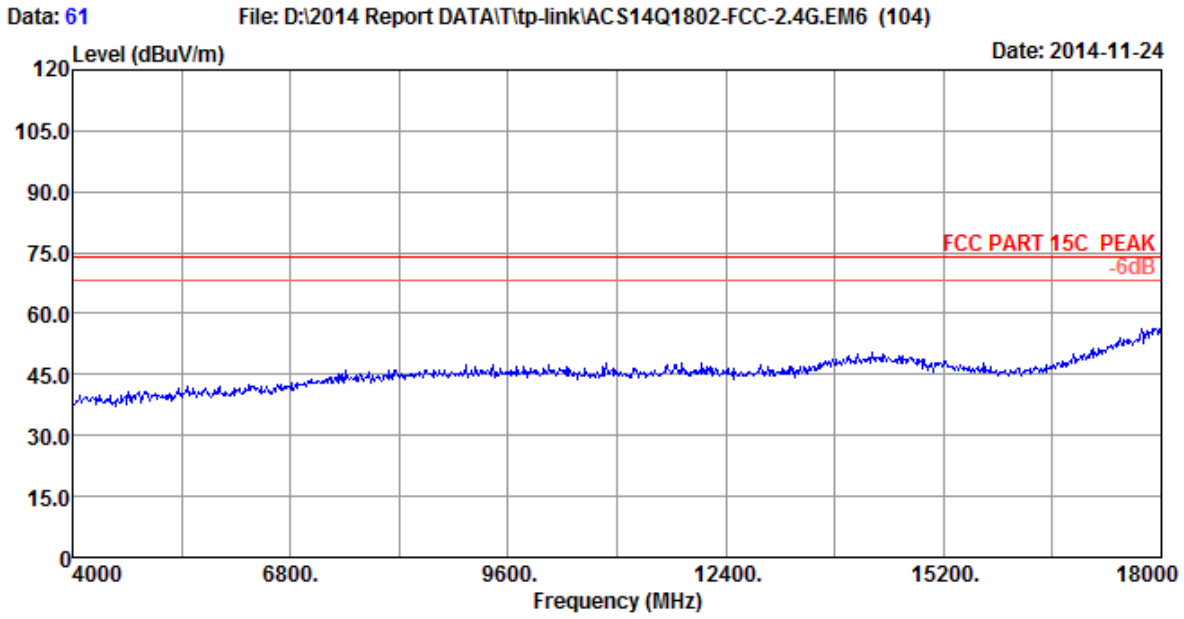


Site no.	: 3m Chamber	Data No.	: 61
Dis. / Ant.	: 3m 2014 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Leo-Li
EUT	: 150Mbps Wireless N Router		
Power Rating	: DC 5V From Adapter Input AC 120V/60Hz		
Test Mode	: IEEE802.11nHT20 2412MHz Tx		
	TL-WR740N		

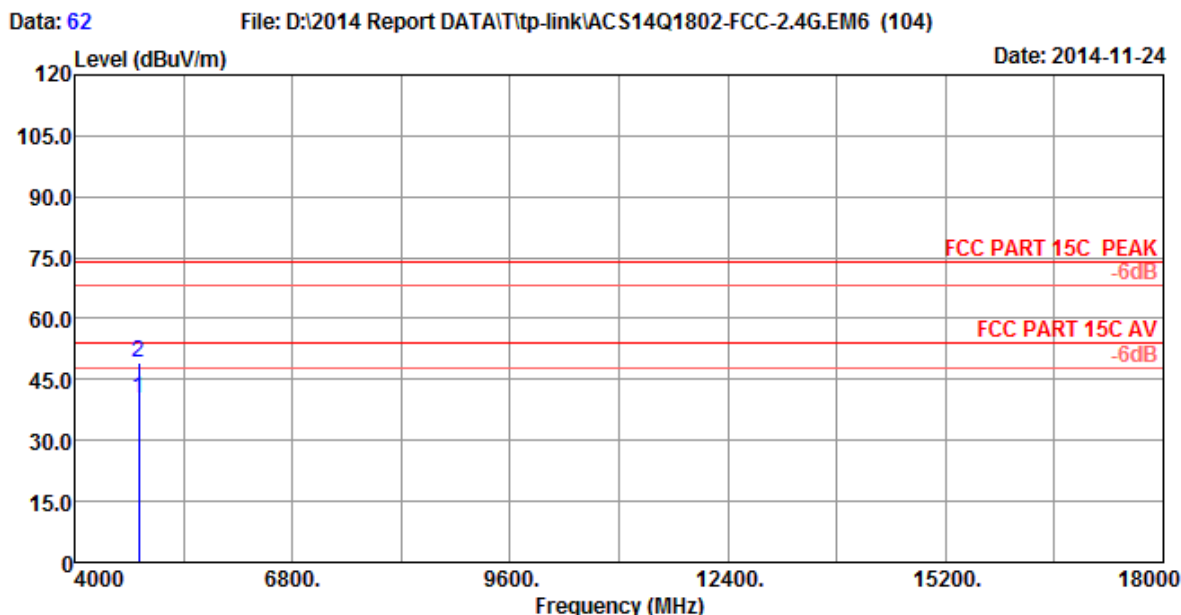


Site no. : 3m Chamber Data No. : 62
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2412MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	32.88	8.58	34.44	35.70	40.20	54.00	13.80	Average
2	4824.000	32.88	8.58	43.44	35.70	49.20	74.00	24.80	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.
 2. The emission levels that are 20dB below the official limit are not reported.

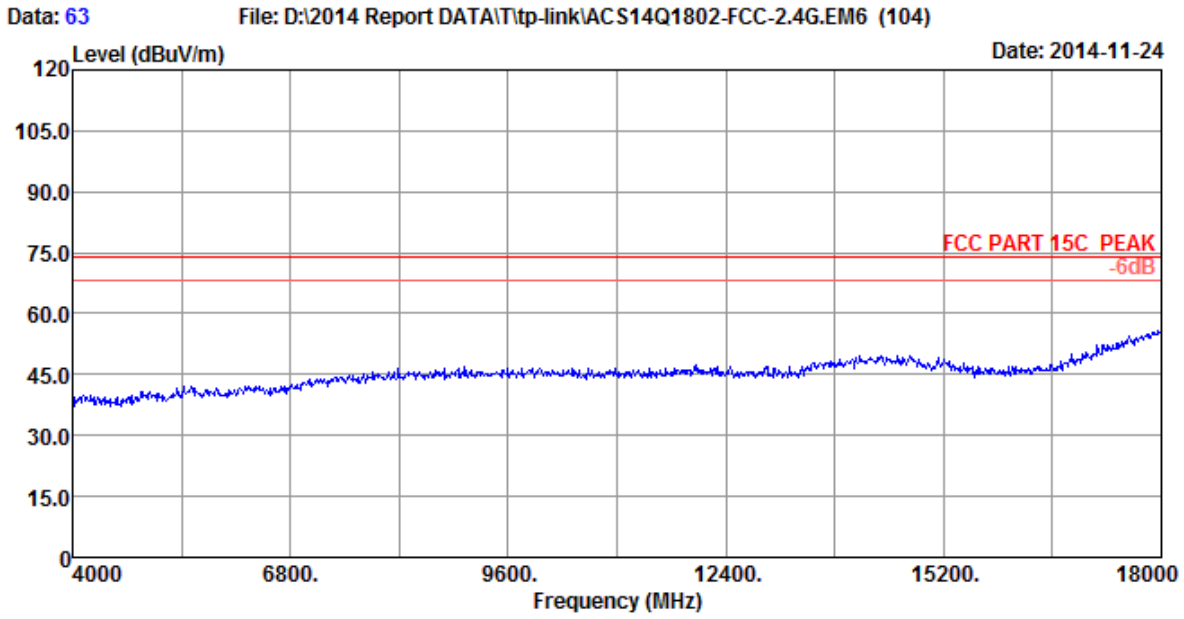


Site no.	: 3m Chamber	Data No.	: 63
Dis. / Ant.	: 3m 2014 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Leo-Li
EUT	: 150Mbps Wireless N Router		
Power Rating	: DC 5V From Adapter Input AC 120V/60Hz		
Test Mode	: IEEE802.11nHT20 2437MHz Tx		
	TL-WR740N		

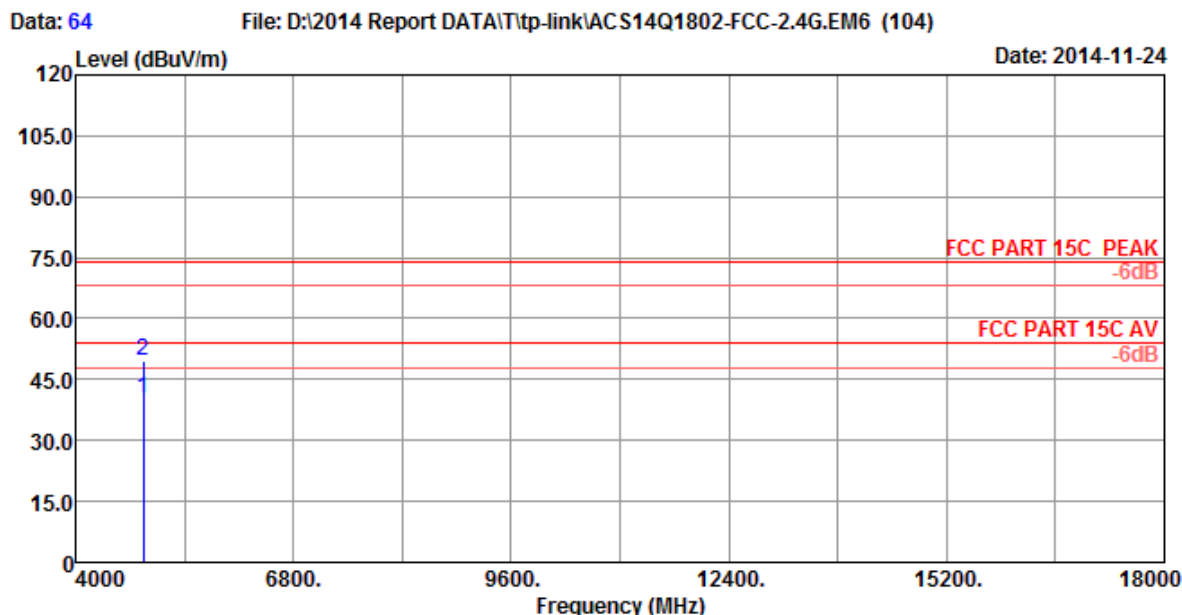


Site no. : 3m Chamber Data No. : 64
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2437MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	32.97	8.63	34.49	35.70	40.39	54.00	13.61	Average
2	4874.000	32.97	8.63	43.49	35.70	49.39	74.00	24.61	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.
 2. The emission levels that are 20dB below the official limit are not reported.

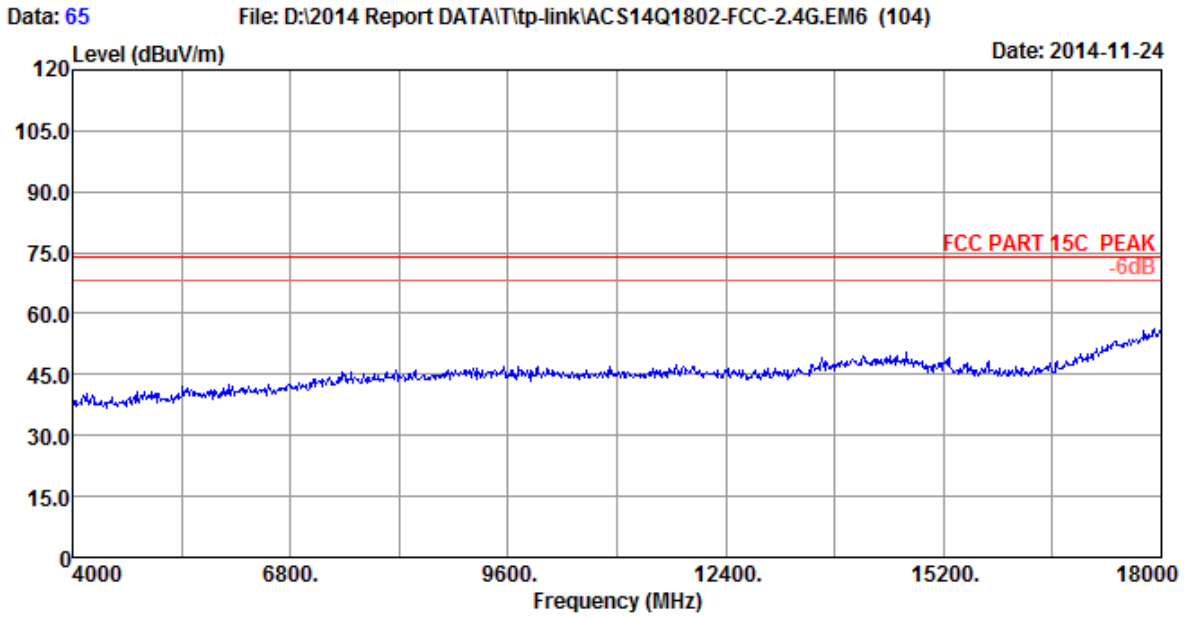


Site no.	: 3m Chamber	Data No.	: 65
Dis. / Ant.	: 3m 2014 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Leo-Li
EUT	: 150Mbps Wireless N Router		
Power Rating	: DC 5V From Adapter Input AC 120V/60Hz		
Test Mode	: IEEE802.11nHT20 2437MHz Tx		
	TL-WR740N		

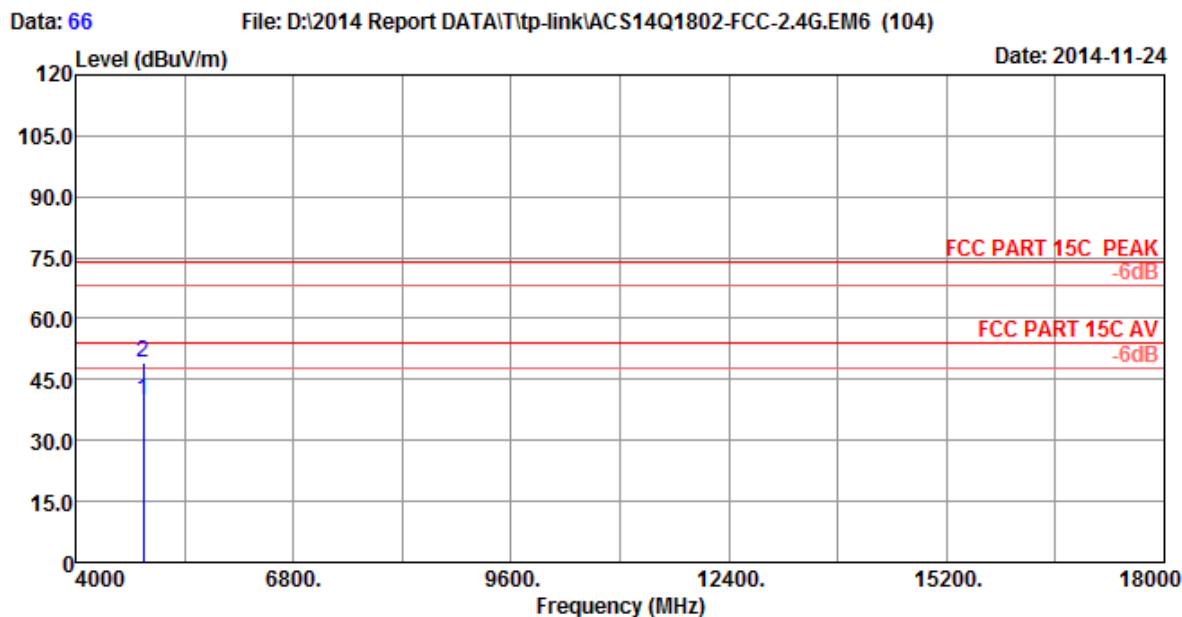

Site no. : 3m Chamber Data No. : 66
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2437MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	32.97	8.63	34.11	35.70	40.01	54.00	13.99	Average
2	4874.000	32.97	8.63	43.11	35.70	49.01	74.00	24.99	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.
 2. The emission levels that are 20dB below the official limit are not reported.

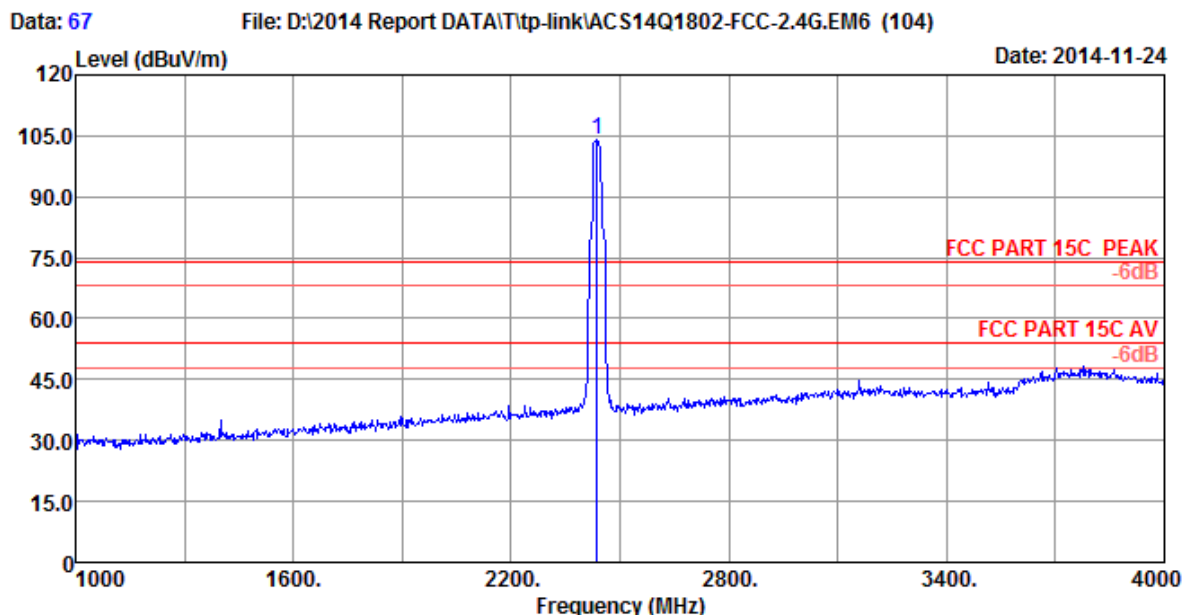


Site no. : 3m Chamber Data No. : 67
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2437MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.000	28.26	5.85	105.62	35.70	104.03	74.00	-30.03	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.

2. The emission levels that are 20dB below the official limit are not reported.

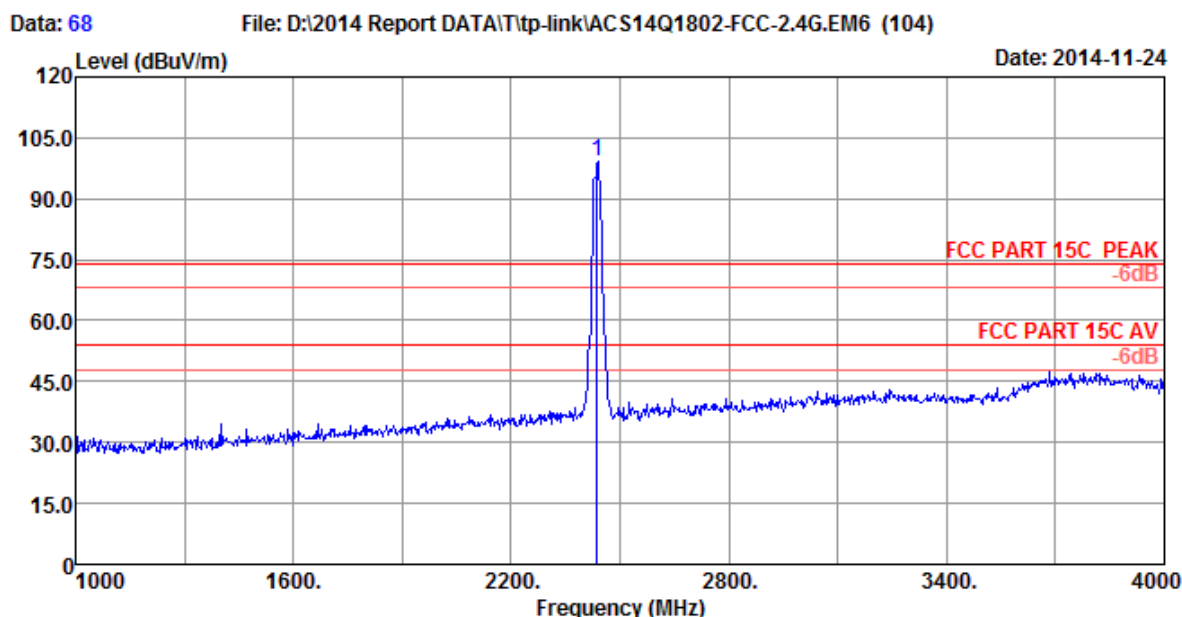


Site no. : 3m Chamber Data No. : 68
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2437MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.000	28.26	5.85	100.64	35.70	99.05	74.00	-25.05	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.

2. The emission levels that are 20dB below the official limit are not reported.

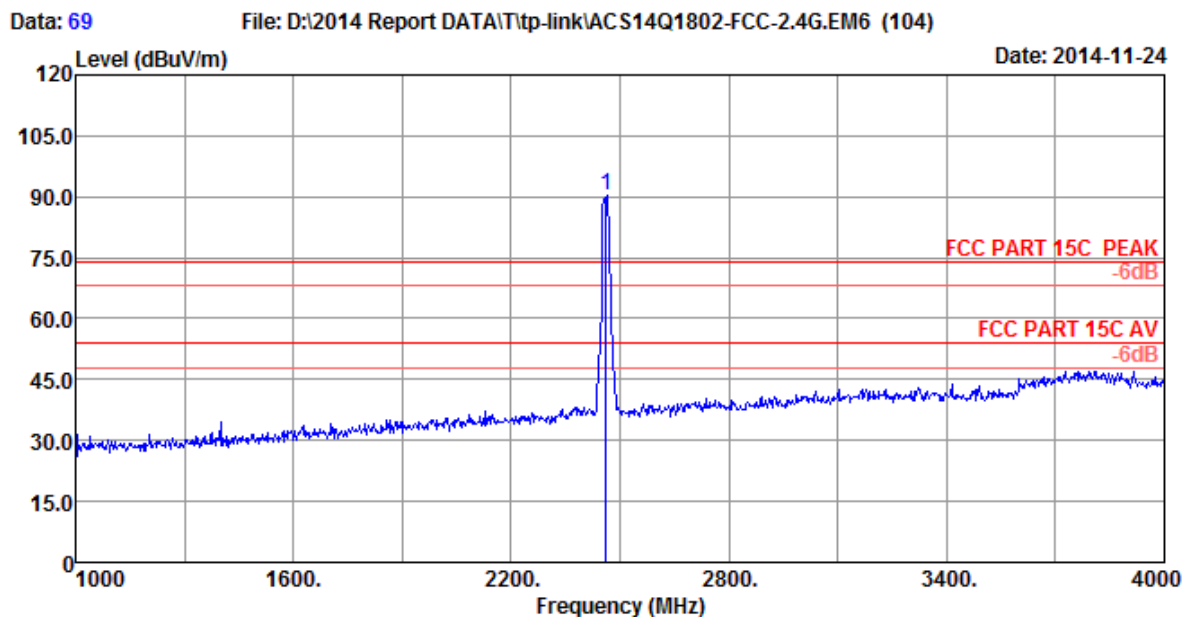


Site no. : 3m Chamber Data No. : 69
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2462MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.000	28.32	5.89	91.80	35.70	90.31	74.00	-16.31	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.


2. The emission levels that are 20dB below the official limit are not reported.

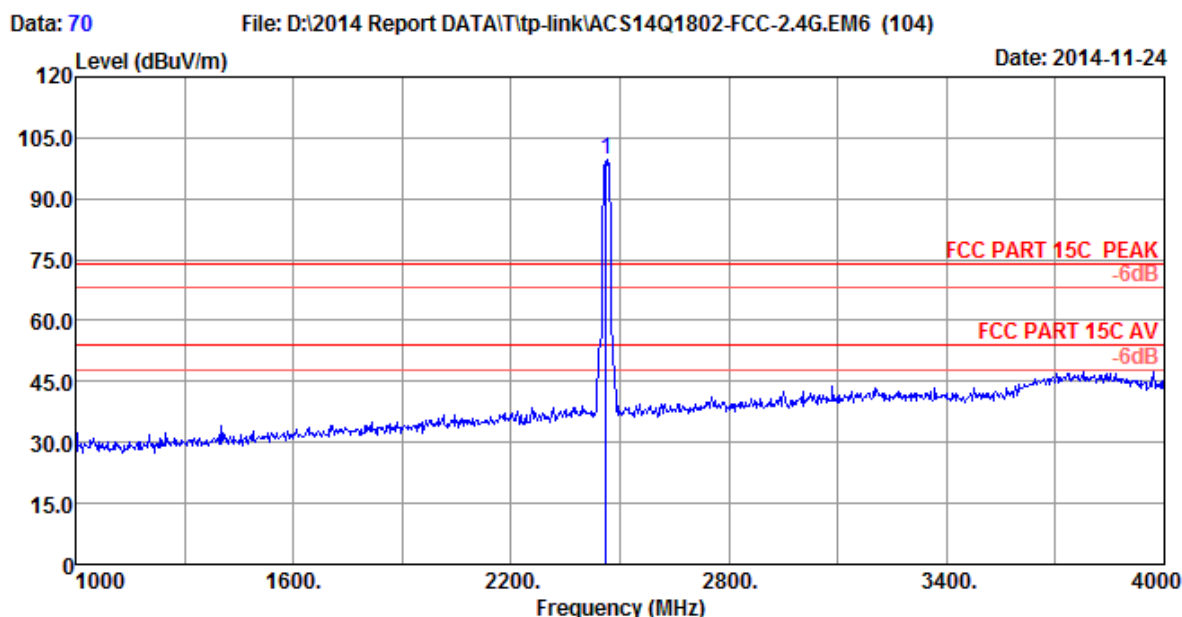


Site no. : 3m Chamber Data No. : 70
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2462MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Amp Factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2462.000	28.32	5.89	100.96	35.70	99.47	74.00	-25.47	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.
 2. The emission levels that are 20dB below the official limit are not reported.

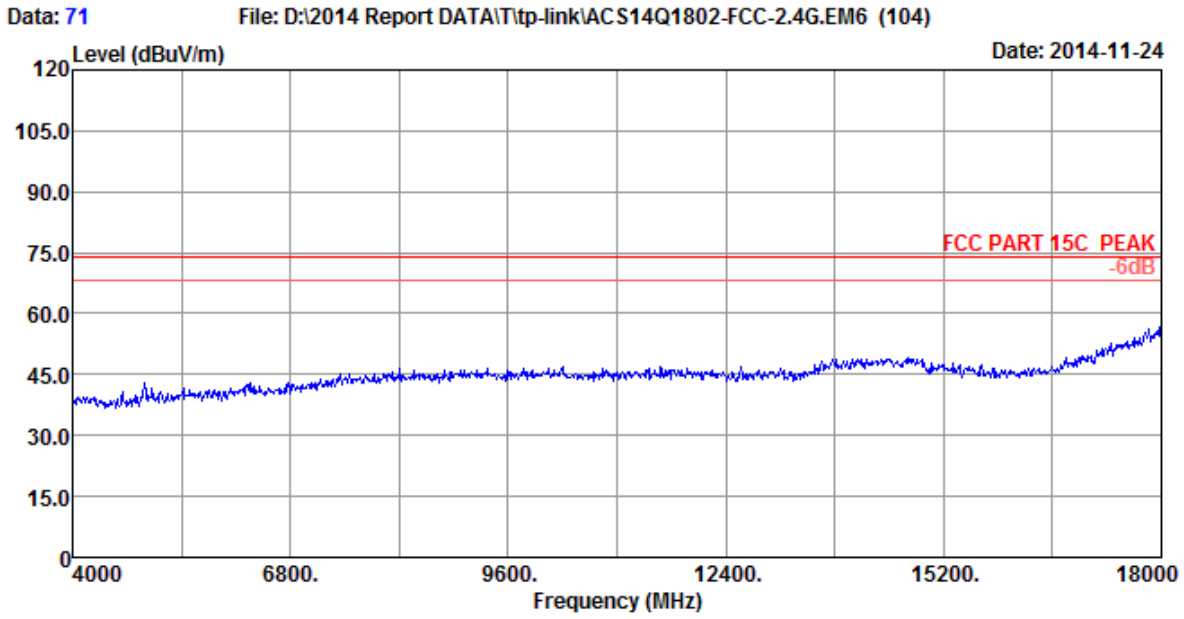


Site no.	: 3m Chamber	Data No.	: 71
Dis. / Ant.	: 3m 2014 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Leo-Li
EUT	: 150Mbps Wireless N Router		
Power Rating	: DC 5V From Adapter Input AC 120V/60Hz		
Test Mode	: IEEE802.11nHT20 2462MHz Tx		
	TL-WR740N		

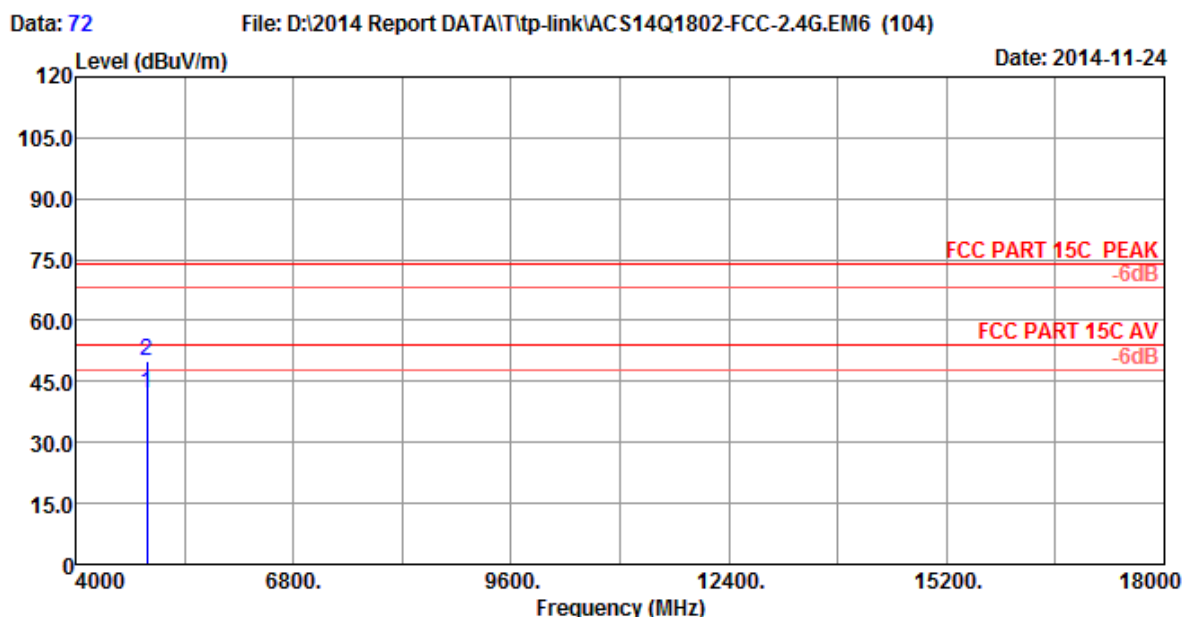


Site no. : 3m Chamber Data No. : 72
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2462MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.000	33.06	8.69	35.85	35.70	41.90	54.00	12.10	Average
2	4924.000	33.06	8.69	43.85	35.70	49.90	74.00	24.10	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.
 2. The emission levels that are 20dB below the official limit are not reported.

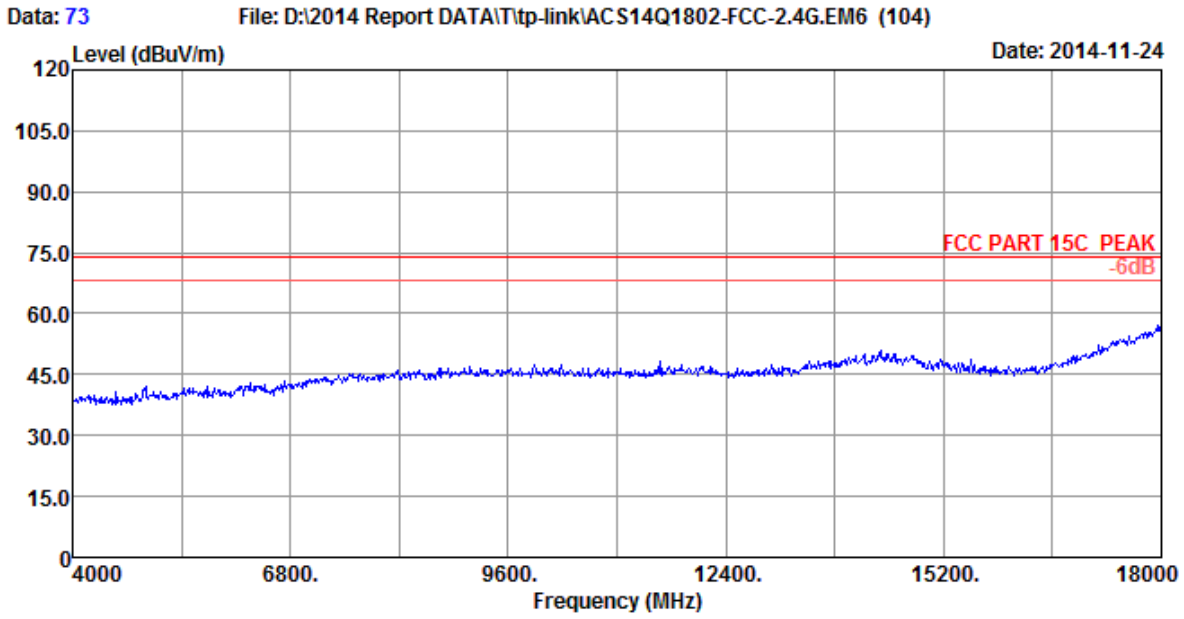


Site no.	: 3m Chamber	Data No.	: 73
Dis. / Ant.	: 3m 2014 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Leo-Li
EUT	: 150Mbps Wireless N Router		
Power Rating	: DC 5V From Adapter Input AC 120V/60Hz		
Test Mode	: IEEE802.11nHT20 2462MHz Tx		
	TL-WR740N		

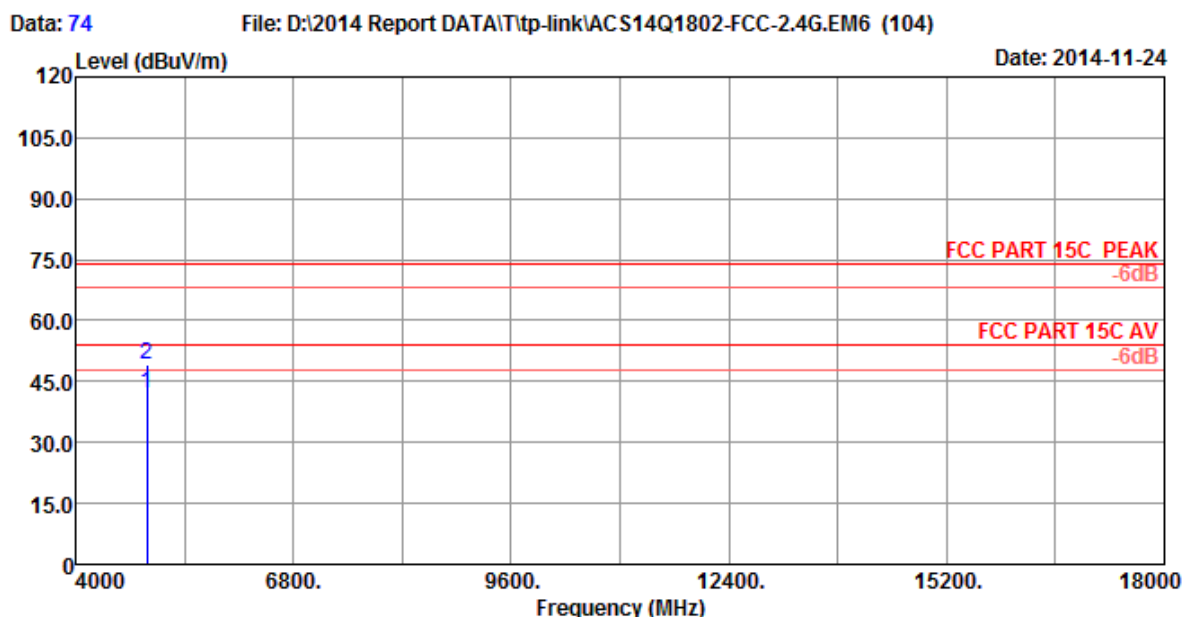

Site no. : 3m Chamber Data No. : 74
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2462MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.000	33.06	8.69	36.16	35.70	42.21	54.00	11.79	Average
2	4924.000	33.06	8.69	43.16	35.70	49.21	74.00	24.79	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.
 2. The emission levels that are 20dB below the official limit are not reported.

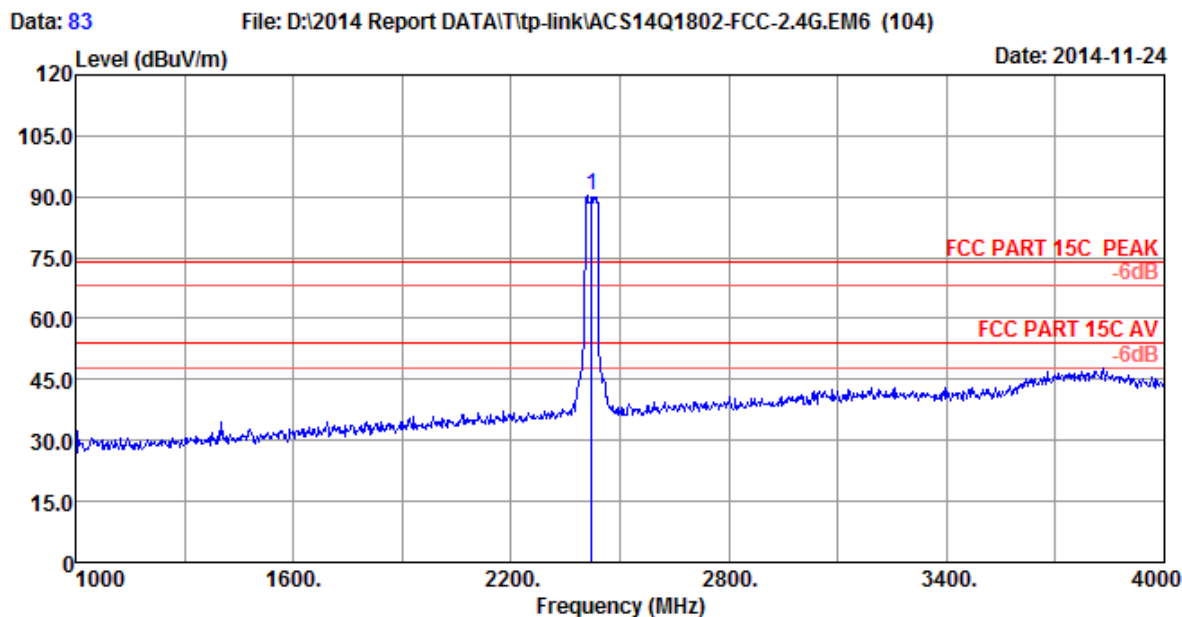

Site no. : 3m Chamber Data No. : 83
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2422MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2422.000	28.23	5.83	92.12	35.70	90.48	74.00	-16.48	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.
 2. The emission levels that are 20dB below the official limit are not reported.

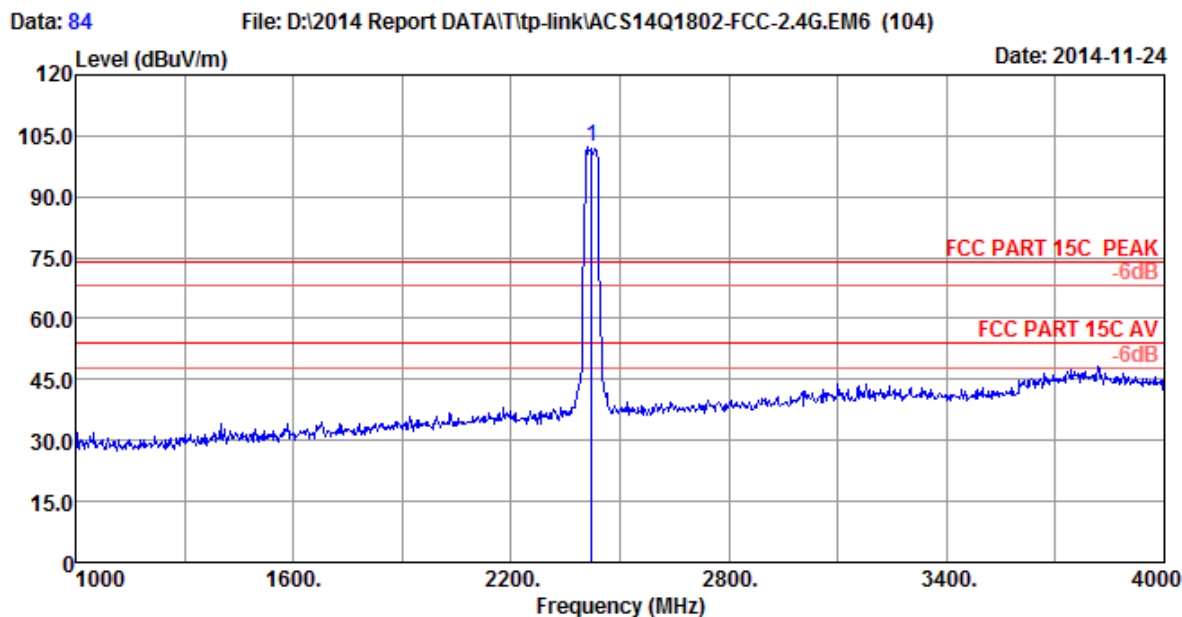


Site no. : 3m Chamber Data No. : 84
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2422MHz Tx
 TL-WR740N


	Freq.	Ant.	Cable		Amp	Emission			
	(MHz)	Factor	Loss	Reading	Factor	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2422.000	28.23	5.83	104.11	35.70	102.47	74.00	-28.47	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.

2. The emission levels that are 20dB below the official limit are not reported.

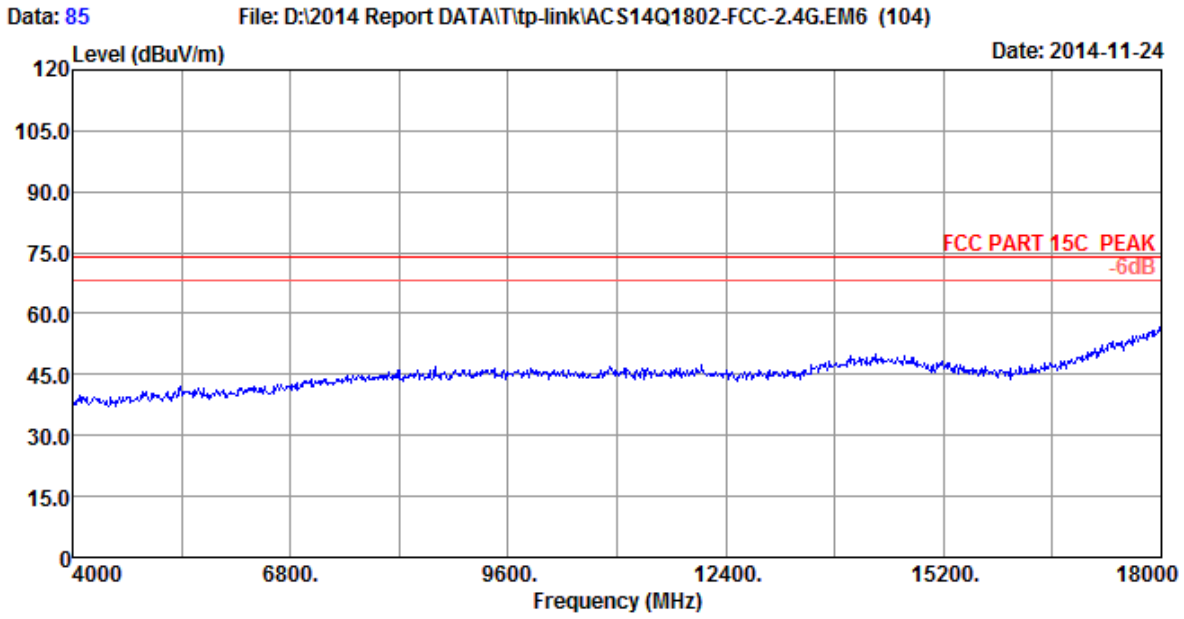


Site no.	: 3m Chamber	Data No.	: 85
Dis. / Ant.	: 3m 2014 3115 (4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Leo-Li
EUT	: 150Mbps Wireless N Router		
Power Rating	: DC 5V From Adapter Input AC 120V/60Hz		
Test Mode	: IEEE802.11nHT40 2422MHz Tx		
	: TL-WR740N		

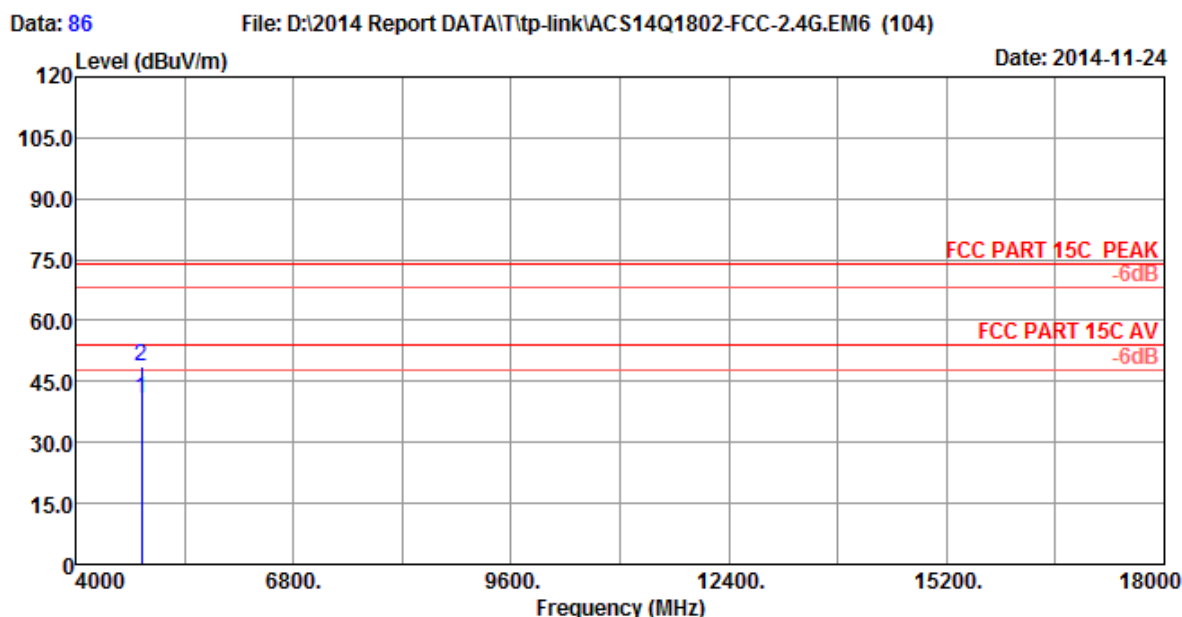


Site no. : 3m Chamber Data No. : 86
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2422MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Amp Factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	4844.000	32.92	8.60	35.11	35.70	40.93	54.00	13.07	Average
2	4844.000	32.92	8.60	43.11	35.70	48.93	74.00	25.07	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.
 2. The emission levels that are 20dB below the official limit are not reported.

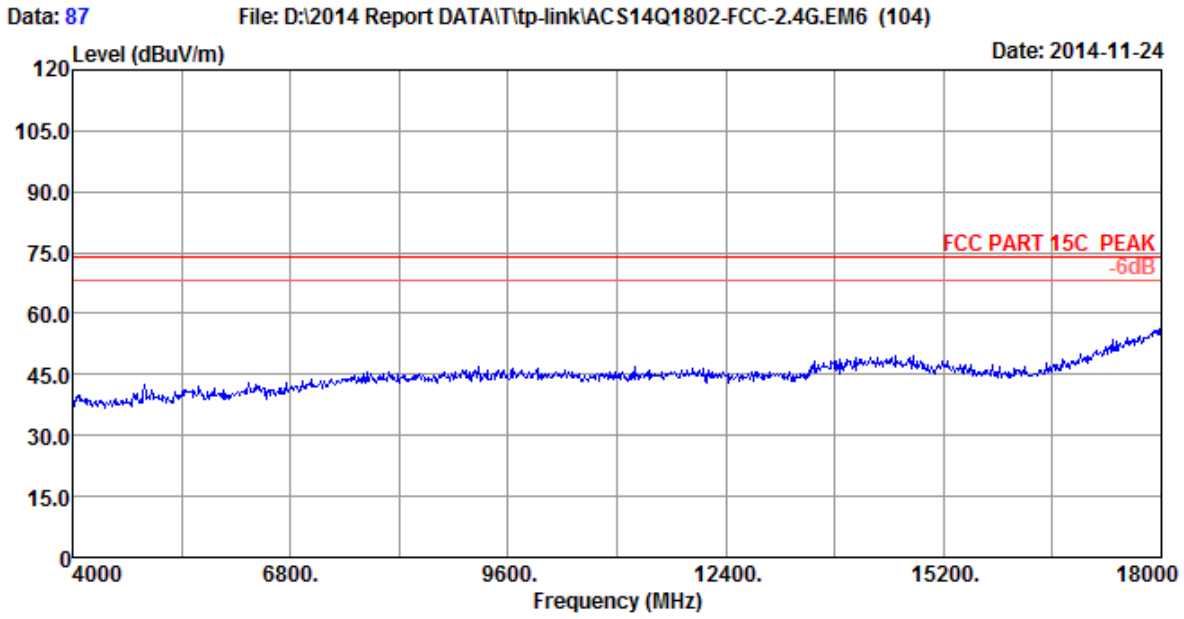

Site no.	: 3m Chamber	Data No.	: 87
Dis. / Ant.	: 3m 2014 3115 (4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer	: Leo-Li
EUT	: 150Mbps Wireless N Router		
Power Rating	: DC 5V From Adapter Input AC 120V/60Hz		
Test Mode	: IEEE802.11nHT40 2422MHz Tx		
	TL-WR740N		

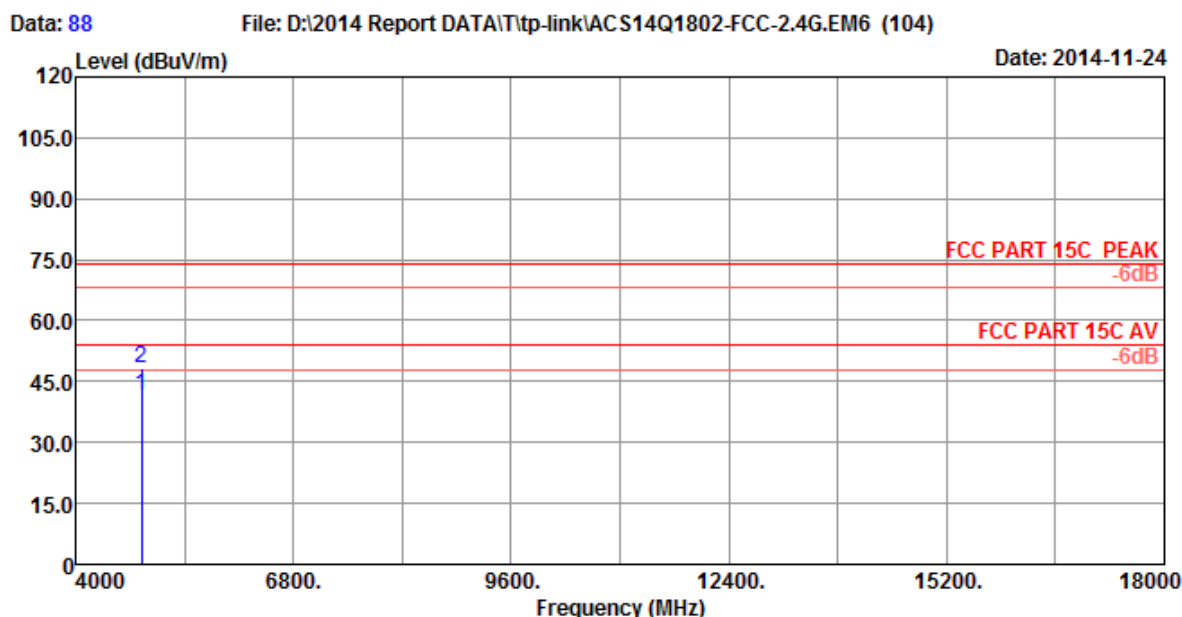

Site no. : 3m Chamber Data No. : 88
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2422MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Amp Factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	4844.000	32.92	8.60	35.63	35.70	41.45	54.00	12.55	Average
2	4844.000	32.92	8.60	42.63	35.70	48.45	74.00	25.55	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.
 2. The emission levels that are 20dB below the official limit are not reported.