



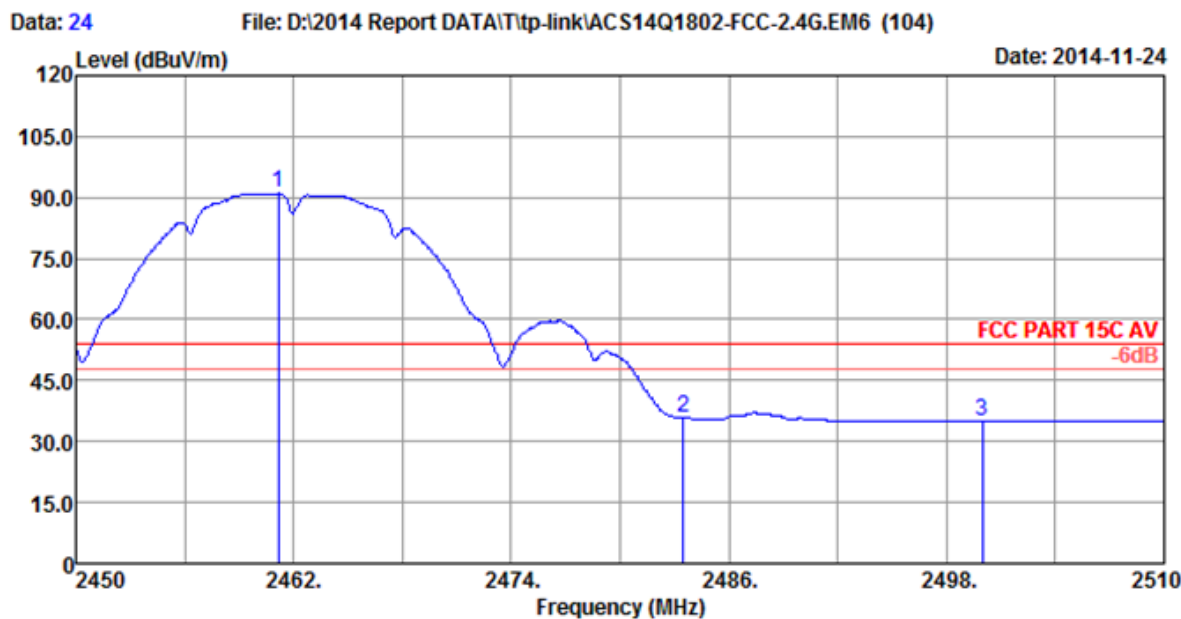

Site no. : 3m Chamber Data No. : 24
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C AV
Env. / Ins. : 23°C/54% Engineer : Leo-Li
EUT : 150Mbps Wireless N Router
Power Rating : DC 5V From Adapter Input AC 120V/60Hz
Test Mode : IEEE802.11b 2462MHz Tx
TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2461.160	28.31	5.89	92.50	35.70	91.00	54.00	-37.00	Average
2	2483.500	28.36	5.92	37.19	35.70	35.77	54.00	18.23	Average
3	2500.000	28.40	5.94	36.26	35.70	34.90	54.00	19.10	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.
2. The emission levels that are 20dB below the official limit are not reported.

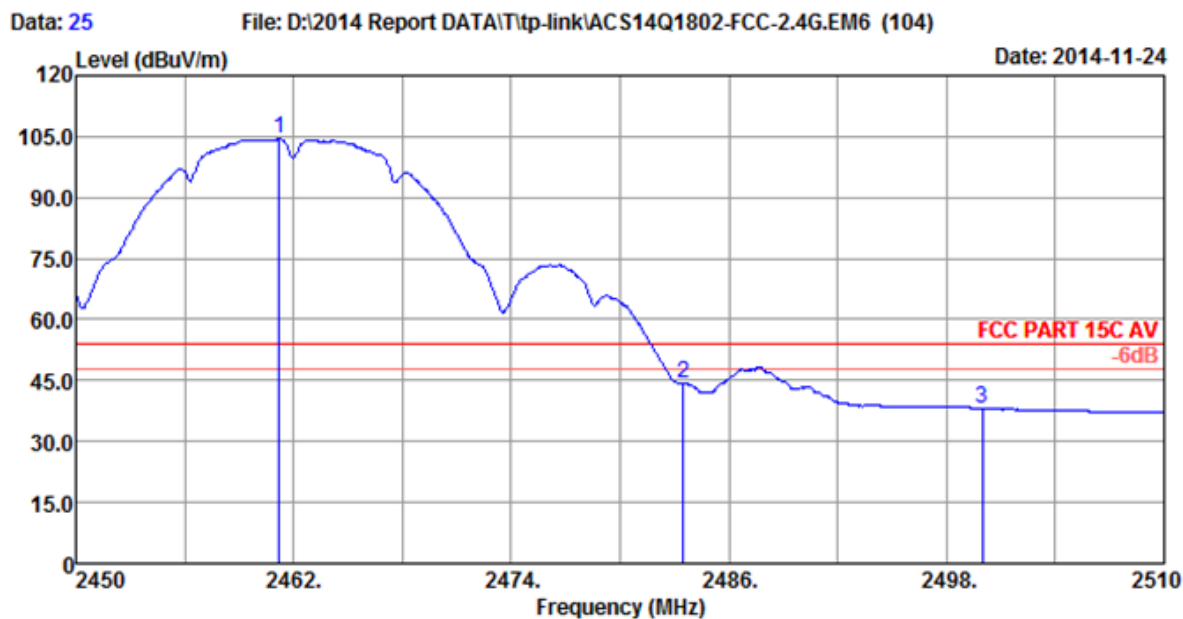


Site no. : 3m Chamber Data No. : 25
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2462MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2461.220	28.31	5.89	105.86	35.70	104.36	54.00	-50.36	Average
2	2483.500	28.36	5.92	45.81	35.70	44.39	54.00	9.61	Average
3	2500.000	28.40	5.94	39.64	35.70	38.28	54.00	15.72	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.

2. The emission levels that are 20dB below the official limit are not reported.

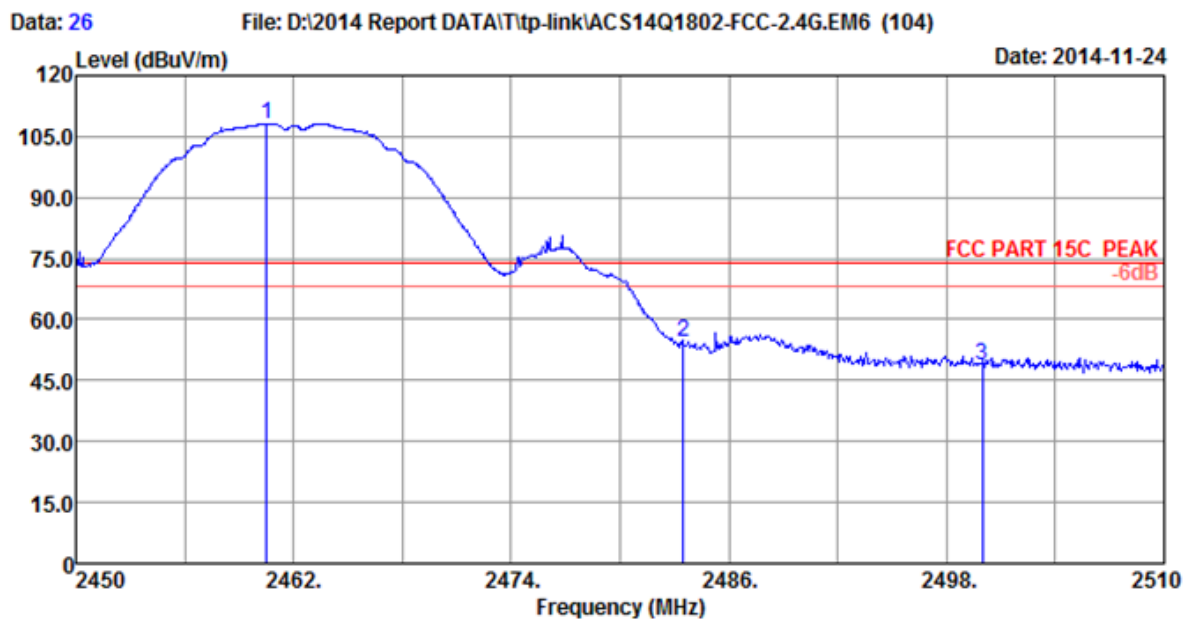


Site no. : 3m Chamber Data No. : 26
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11b 2462MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2460.500	28.31	5.89	109.72	35.70	108.22	74.00	-34.22	Peak
2	2483.500	28.36	5.92	55.97	35.70	54.55	74.00	19.45	Peak
3	2500.000	28.40	5.94	50.23	35.70	48.87	74.00	25.13	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.

2. The emission levels that are 20dB below the official limit are not reported.

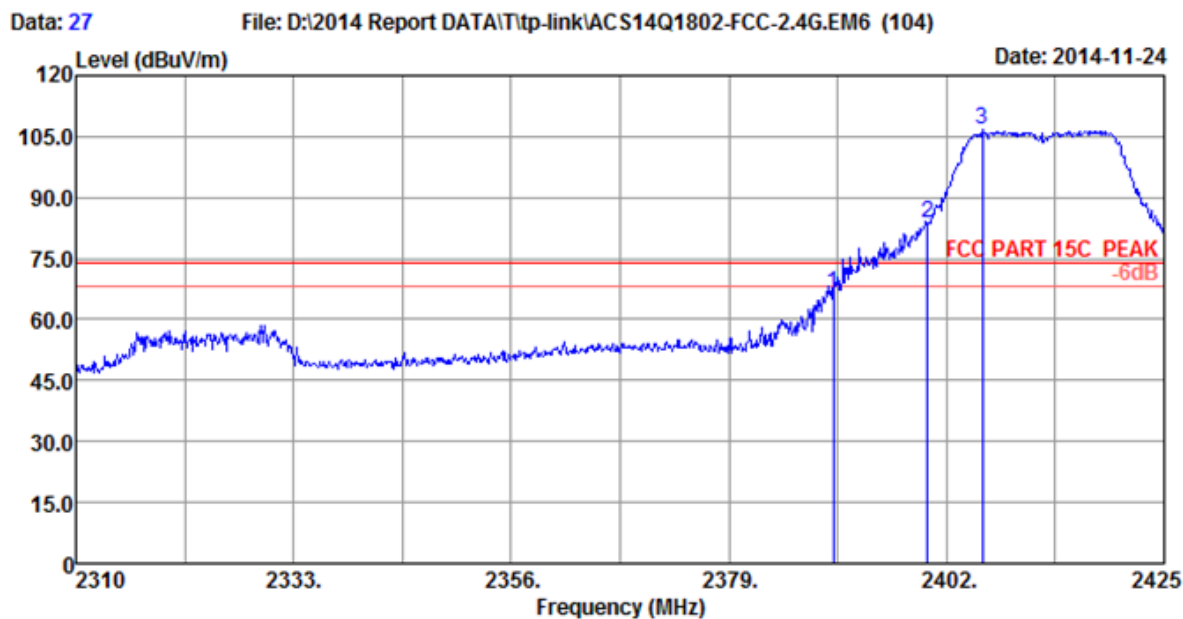


Site no. : 3m Chamber Data No. : 27
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2412MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	28.16	5.78	68.35	35.70	66.59	74.00	7.41	Peak
2	2400.000	28.18	5.80	85.54	35.70	83.82	74.00	-9.82	Peak
3	2405.795	28.19	5.81	108.27	35.70	106.57	74.00	-32.57	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.

2. The emission levels that are 20dB below the official limit are not reported.

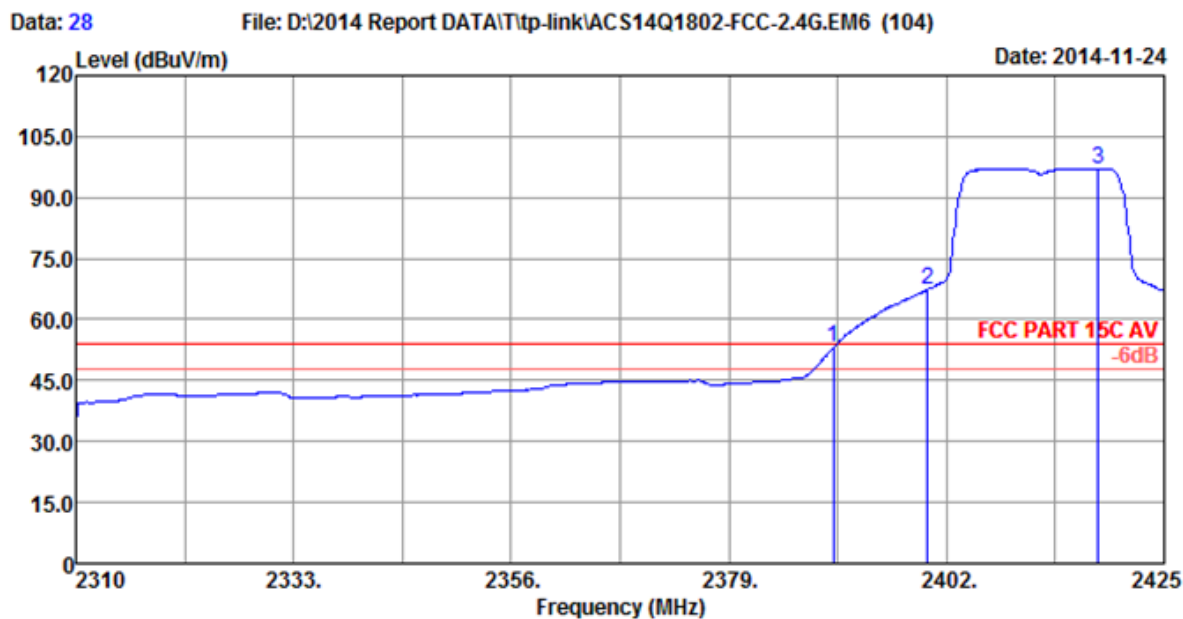


Site no. : 3m Chamber Data No. : 28
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2412MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.040	28.16	5.78	54.79	35.70	53.03	54.00	0.97	Average
2	2400.045	28.18	5.80	69.14	35.70	67.42	54.00	-13.42	Average
3	2417.985	28.22	5.82	98.83	35.70	97.17	54.00	-43.17	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.

2. The emission levels that are 20dB below the official limit are not reported.

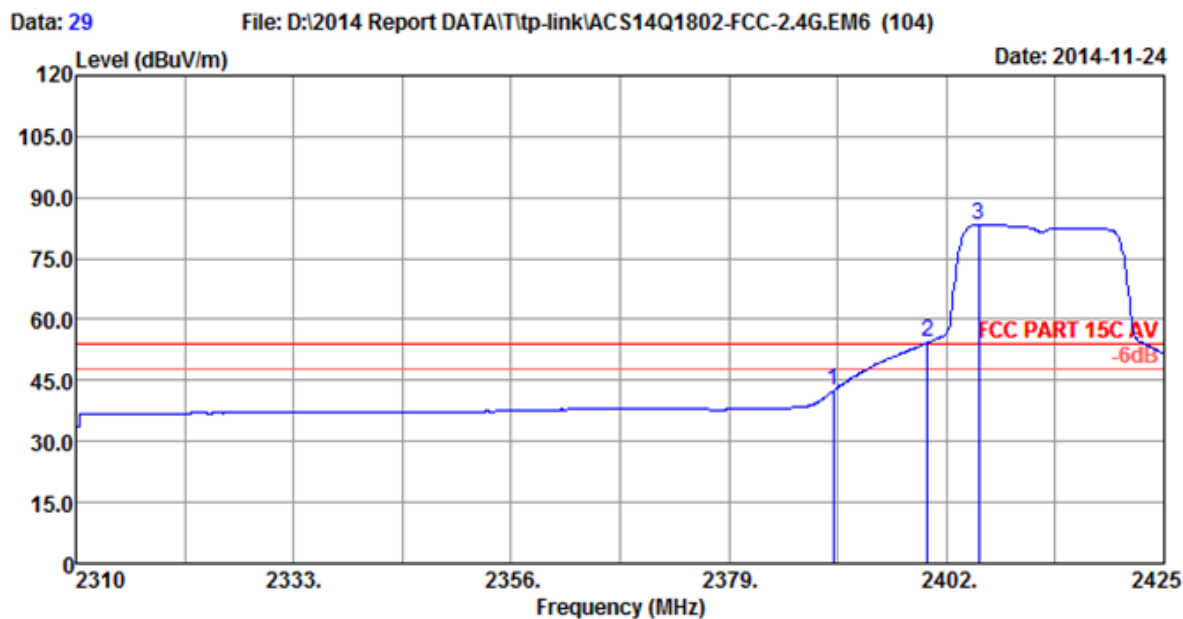


Site no. : 3m Chamber Data No. : 29
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2412MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	28.16	5.78	44.14	35.70	42.38	54.00	11.62	Average
2	2400.000	28.18	5.80	56.02	35.70	54.30	54.00	-0.30	Average
3	2405.450	28.19	5.80	85.02	35.70	83.31	54.00	-29.31	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.

2. The emission levels that are 20dB below the official limit are not reported.

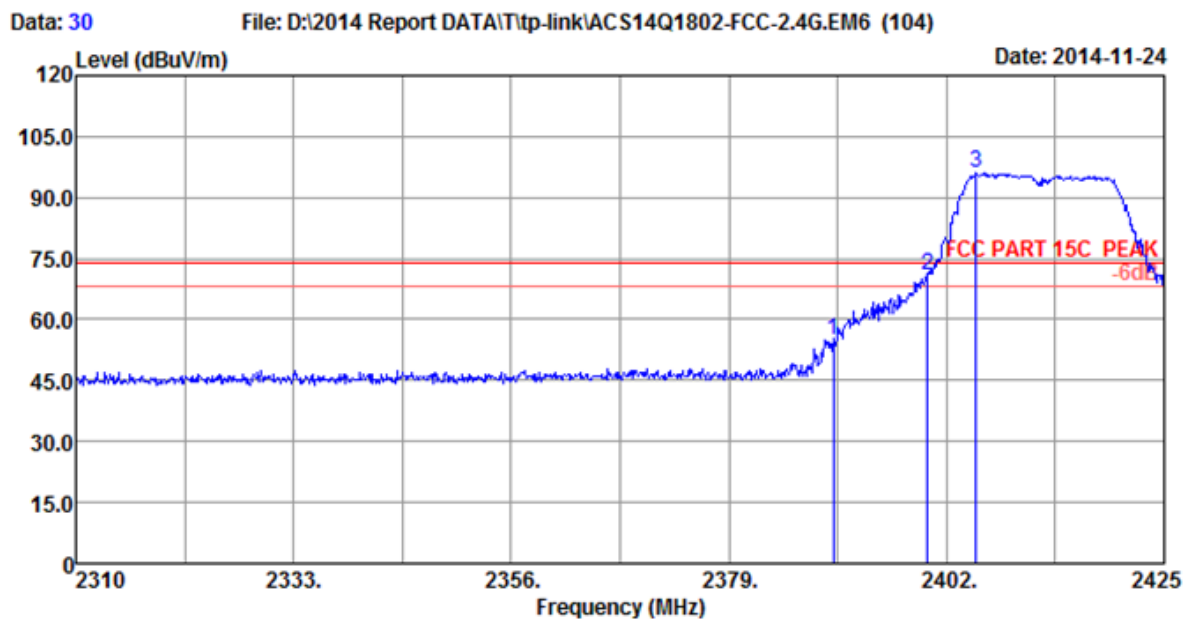


Site no. : 3m Chamber Data No. : 30
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2412MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	28.16	5.78	56.51	35.70	54.75	74.00	19.25	Peak
2	2400.000	28.18	5.80	72.76	35.70	71.04	74.00	2.96	Peak
3	2405.105	28.19	5.80	97.64	35.70	95.93	74.00	-21.93	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.

2. The emission levels that are 20dB below the official limit are not reported.

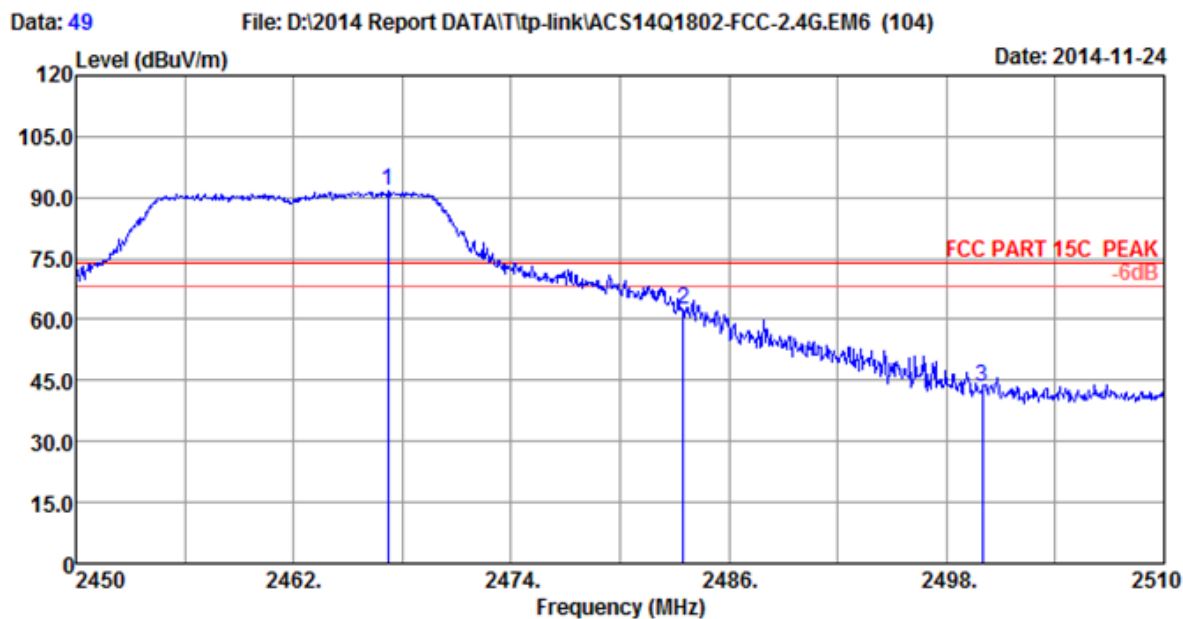


Site no. : 3m Chamber Data No. : 49
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2467.220	28.33	5.89	93.03	35.70	91.55	74.00	-17.55	Peak
2	2483.500	28.36	5.92	63.94	35.70	62.52	74.00	11.48	Peak
3	2500.000	28.40	5.94	44.88	35.70	43.52	74.00	30.48	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.

2. The emission levels that are 20dB below the official limit are not reported.

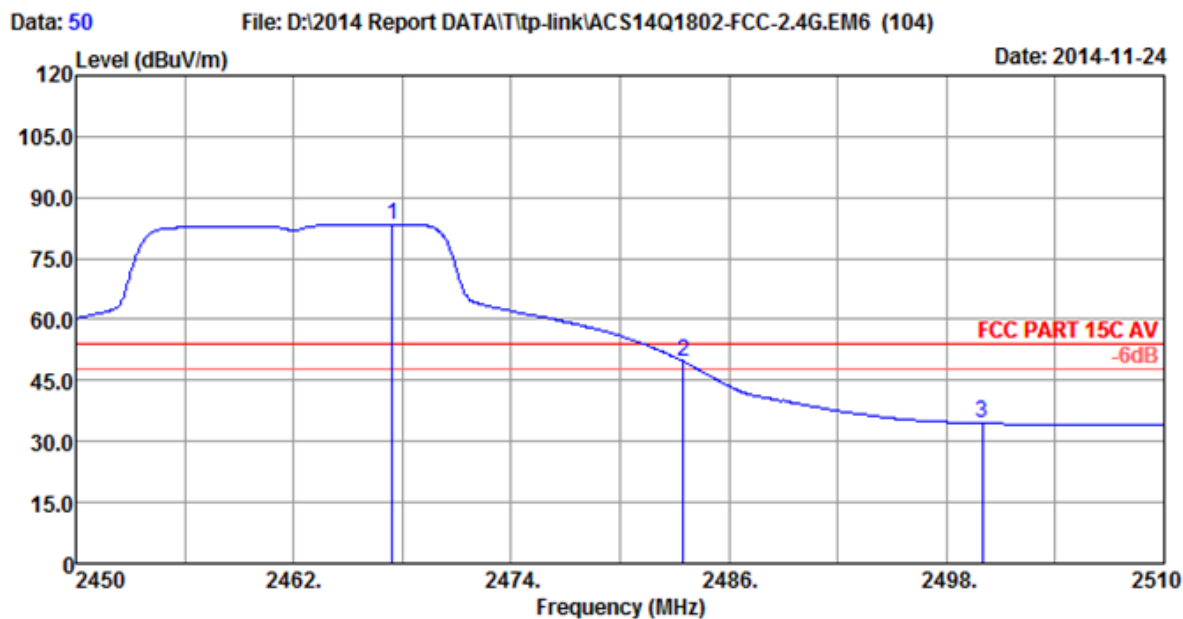


Site no. : 3m Chamber Data No. : 50
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2467.460	28.33	5.90	84.88	35.70	83.41	54.00	-29.41	Average
2	2483.500	28.36	5.92	51.12	35.70	49.70	54.00	4.30	Average
3	2500.000	28.40	5.94	35.84	35.70	34.48	54.00	19.52	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.

2. The emission levels that are 20dB below the official limit are not reported.

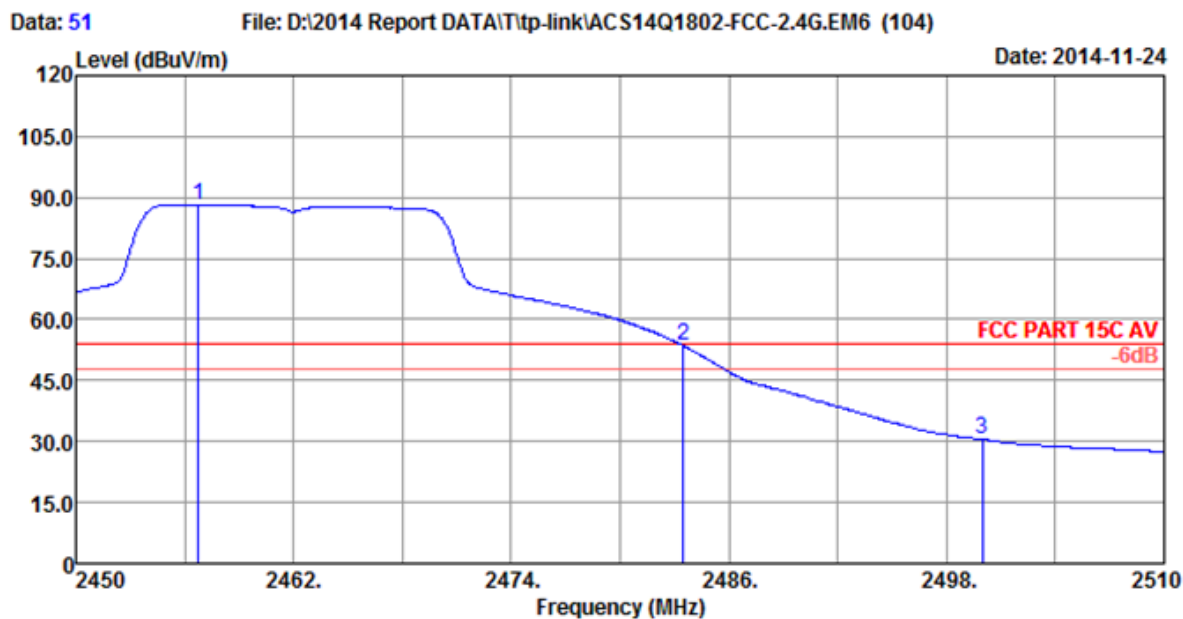


Site no. : 3m Chamber Data No. : 51
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Amp Factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2456.780	28.30	5.88	89.84	35.70	88.32	54.00	-34.32	Peak
2	2483.500	28.36	5.92	54.99	35.70	53.57	54.00	0.43	Peak
3	2500.000	28.40	5.94	31.82	35.70	30.46	54.00	23.54	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.

2. The emission levels that are 20dB below the official limit are not reported.

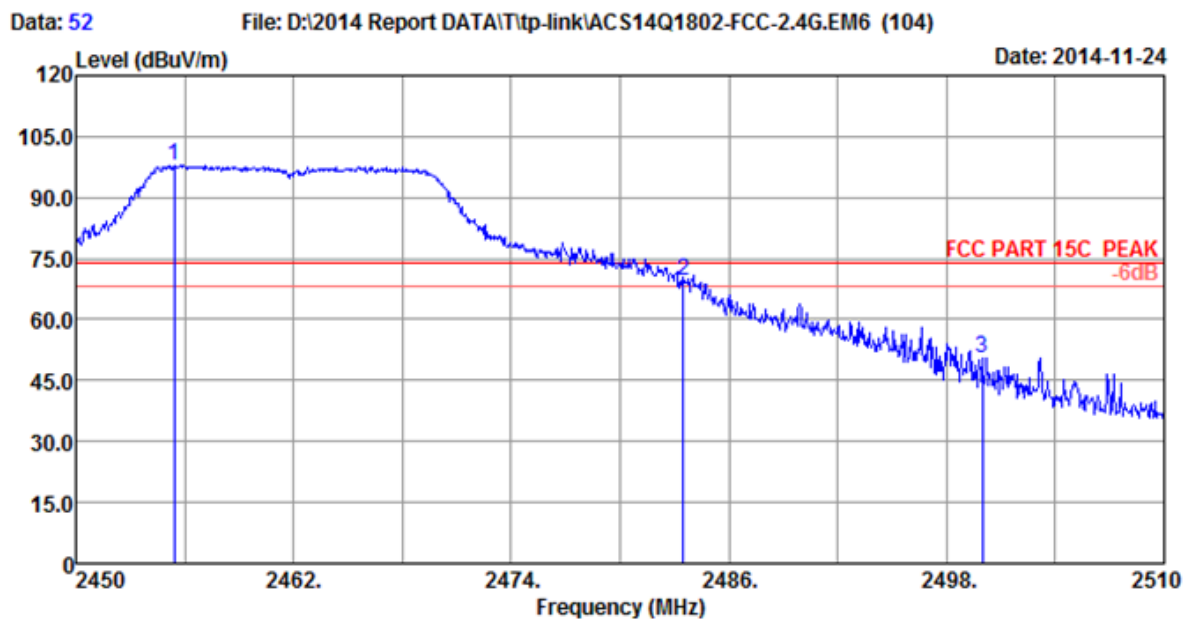


Site no. : 3m Chamber Data No. : 52
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11g 2462MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2455.400	28.30	5.88	99.39	35.70	97.87	74.00	-23.87	Peak
2	2483.480	28.36	5.92	70.73	35.70	69.31	74.00	4.69	Peak
3	2499.980	28.40	5.94	51.72	35.70	50.36	74.00	23.64	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.

2. The emission levels that are 20dB below the official limit are not reported.

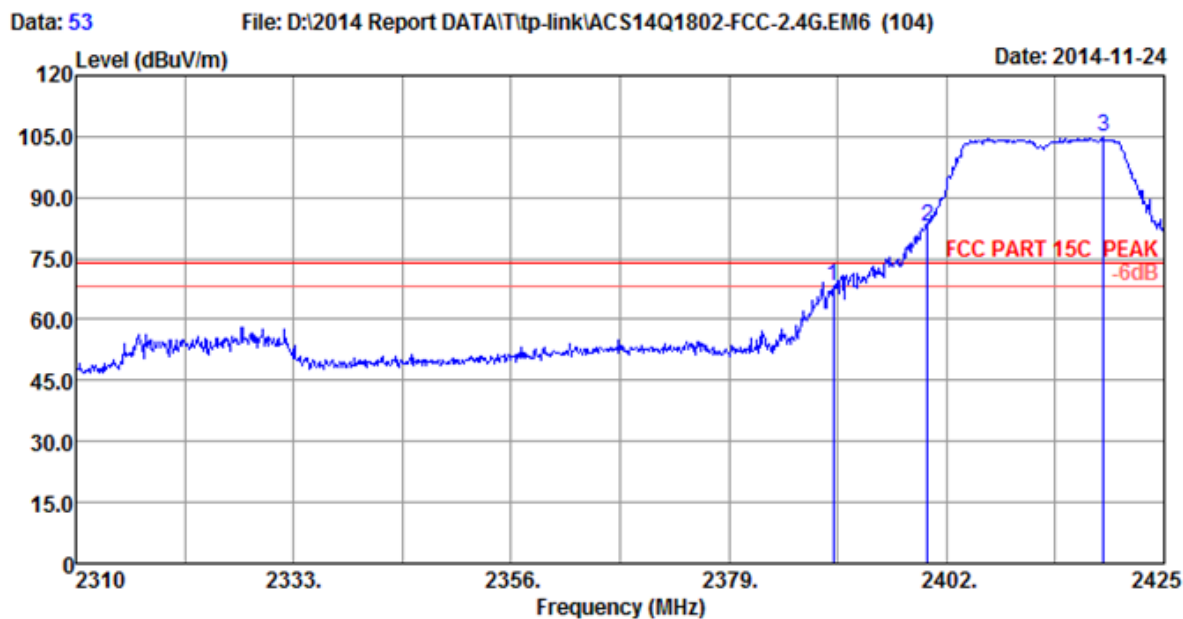


Site no. : 3m Chamber Data No. : 53
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2412MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	28.16	5.78	69.78	35.70	68.02	74.00	5.98	Peak
2	2400.000	28.18	5.80	84.33	35.70	82.61	74.00	-8.61	Peak
3	2418.560	28.22	5.82	106.56	35.70	104.90	74.00	-30.90	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.

2. The emission levels that are 20dB below the official limit are not reported.

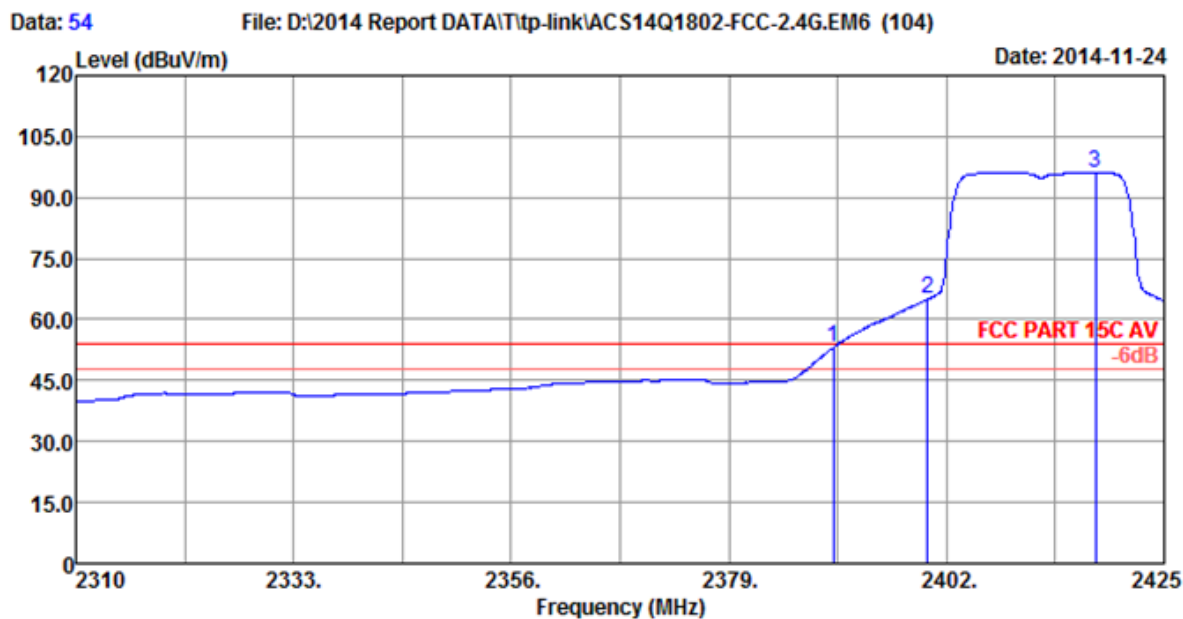


Site no. : 3m Chamber Data No. : 54
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2412MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Amp Factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2390.000	28.16	5.78	54.81	35.70	53.05	54.00	0.95	Average
2	2400.000	28.18	5.80	66.80	35.70	65.08	54.00	-11.08	Average
3	2417.755	28.22	5.82	97.88	35.70	96.22	54.00	-42.22	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.

2. The emission levels that are 20dB below the official limit are not reported.

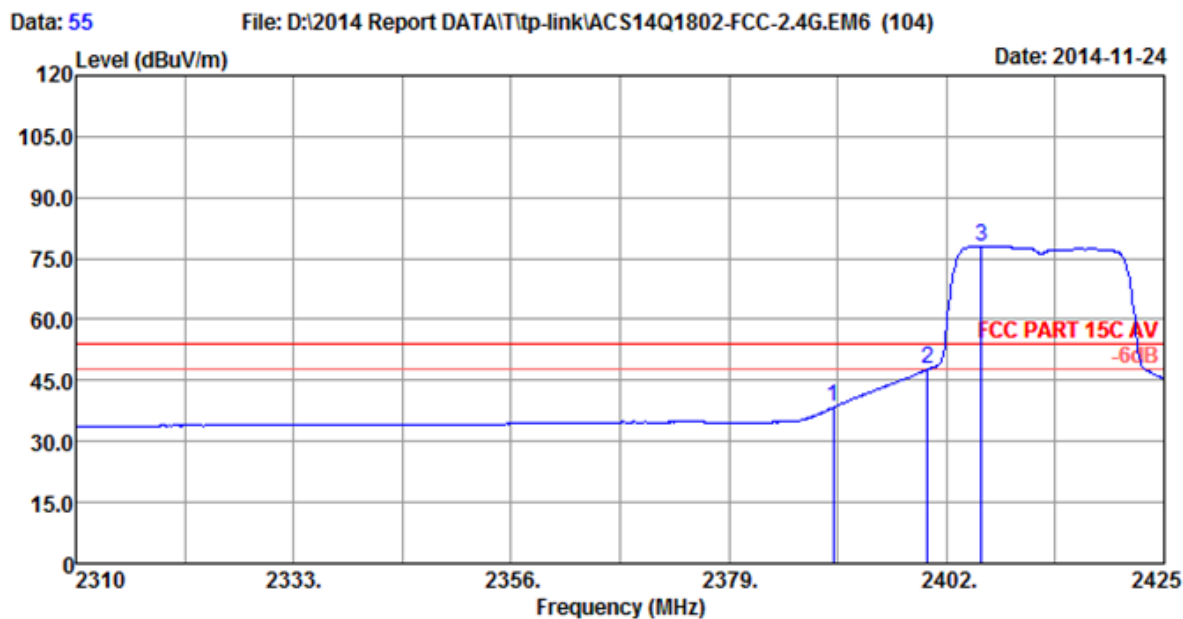


Site no. : 3m Chamber Data No. : 55
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2412MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	28.16	5.78	40.11	35.70	38.35	54.00	15.65	Average
2	2400.000	28.18	5.80	49.48	35.70	47.76	54.00	6.24	Average
3	2405.680	28.19	5.81	79.79	35.70	78.09	54.00	-24.09	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.

2. The emission levels that are 20dB below the official limit are not reported.

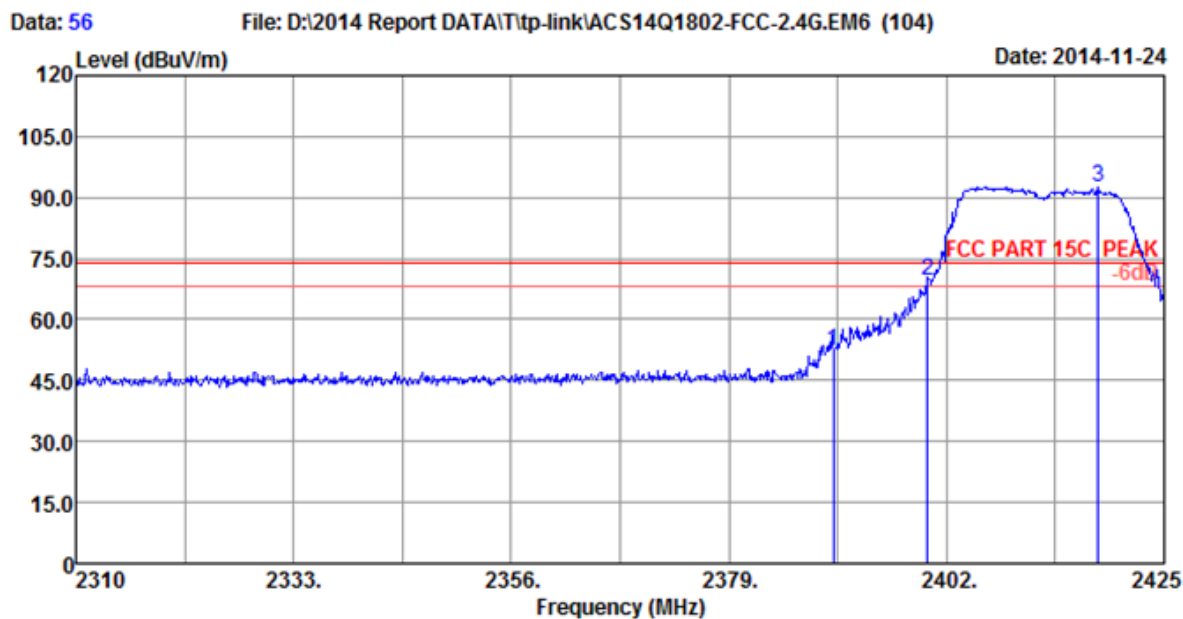


Site no. : 3m Chamber Data No. : 56
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2412MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	28.16	5.78	54.12	35.70	52.36	74.00	21.64	Peak
2	2400.000	28.18	5.80	71.13	35.70	69.41	74.00	4.59	Peak
3	2417.985	28.22	5.82	94.33	35.70	92.67	74.00	-18.67	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.

2. The emission levels that are 20dB below the official limit are not reported.

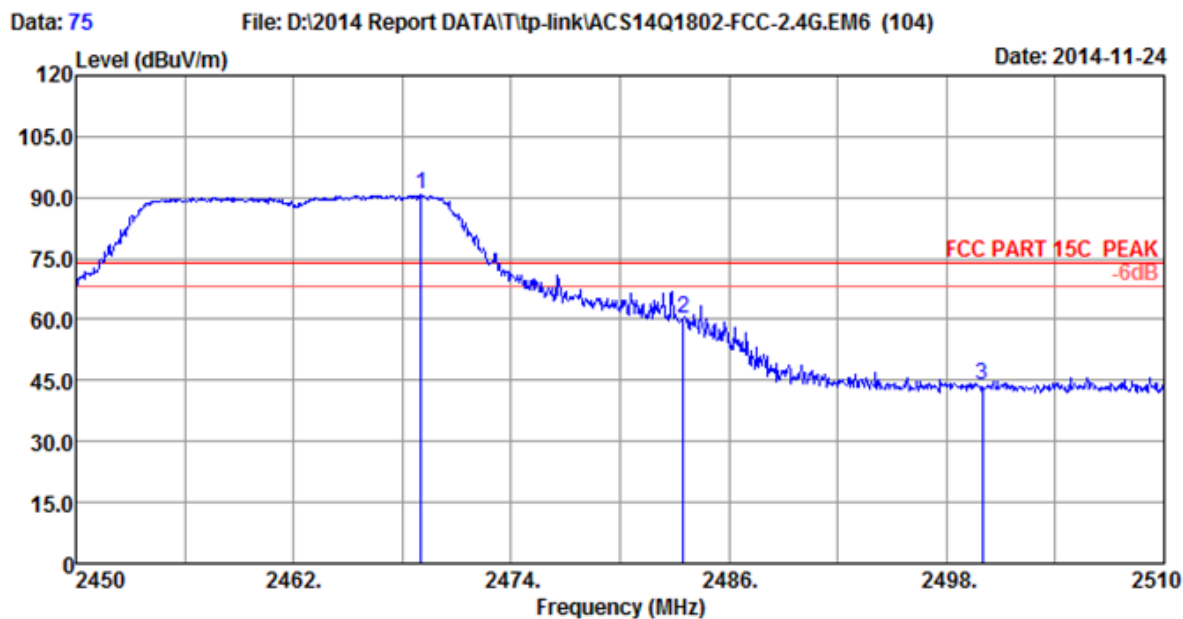


Site no. : 3m Chamber Data No. : 75
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2462MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2469.020	28.33	5.90	92.33	35.70	90.86	74.00	-16.86	Peak
2	2483.500	28.36	5.92	61.80	35.70	60.38	74.00	13.62	Peak
3	2500.000	28.40	5.94	45.12	35.70	43.76	74.00	30.24	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.

2. The emission levels that are 20dB below the official limit are not reported.

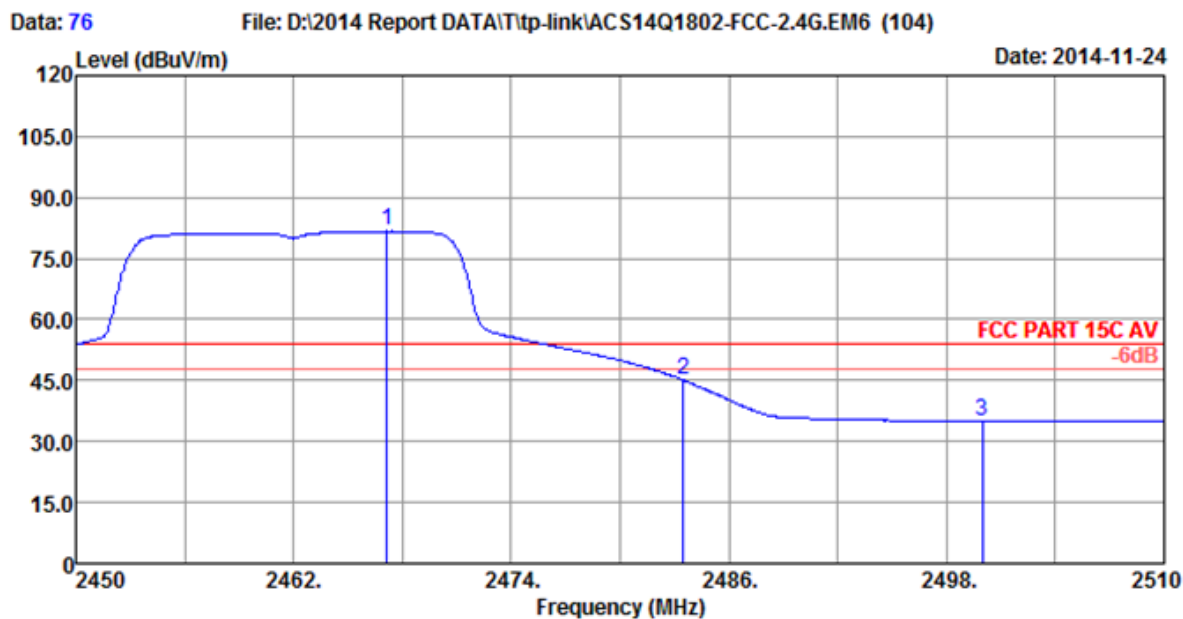


Site no. : 3m Chamber Data No. : 76
Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C AV
Env. / Ins. : 23°C/54% Engineer : Leo-Li
EUT : 150Mbps Wireless N Router
Power Rating : DC 5V From Adapter Input AC 120V/60Hz
Test Mode : IEEE802.11nHT20 2462MHz Tx
TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2467.160	28.33	5.89	83.18	35.70	81.70	54.00	-27.70	Average
2	2483.500	28.36	5.92	46.54	35.70	45.12	54.00	8.88	Average
3	2500.000	28.40	5.94	36.49	35.70	35.13	54.00	18.87	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.

2. The emission levels that are 20dB below the official limit are not reported.

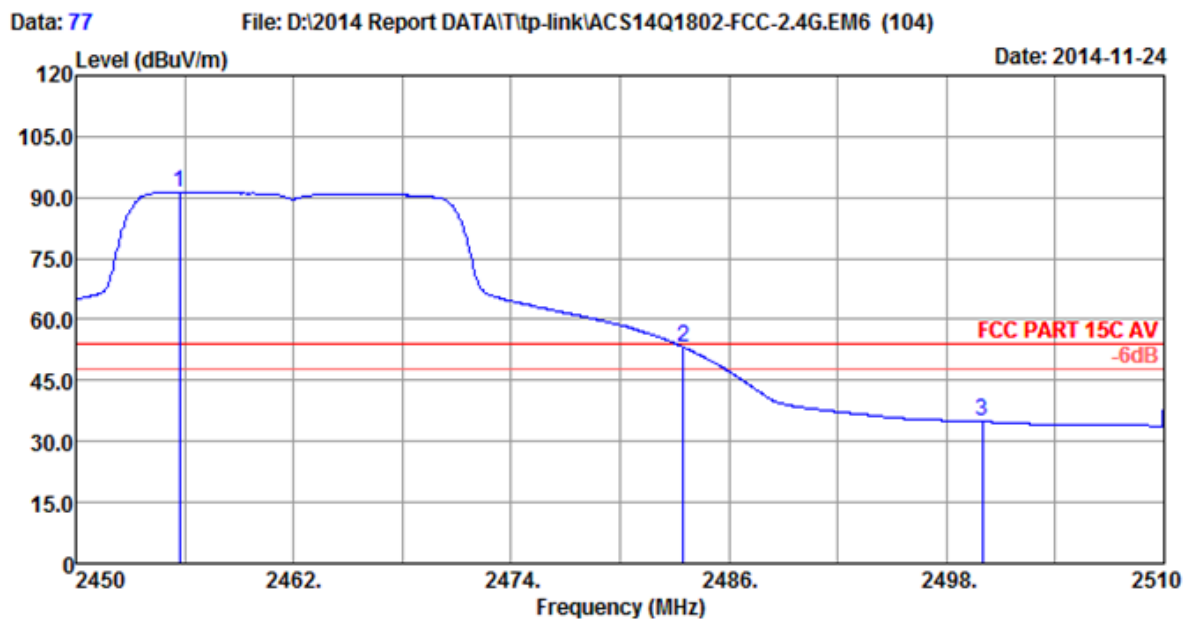


Site no. : 3m Chamber Data No. : 77
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2462MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2455.700	28.30	5.88	92.95	35.70	91.43	54.00	-37.43	Average
2	2483.500	28.36	5.92	54.65	35.70	53.23	54.00	0.77	Average
3	2500.000	28.40	5.94	36.31	35.70	34.95	54.00	19.05	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.

2. The emission levels that are 20dB below the official limit are not reported.

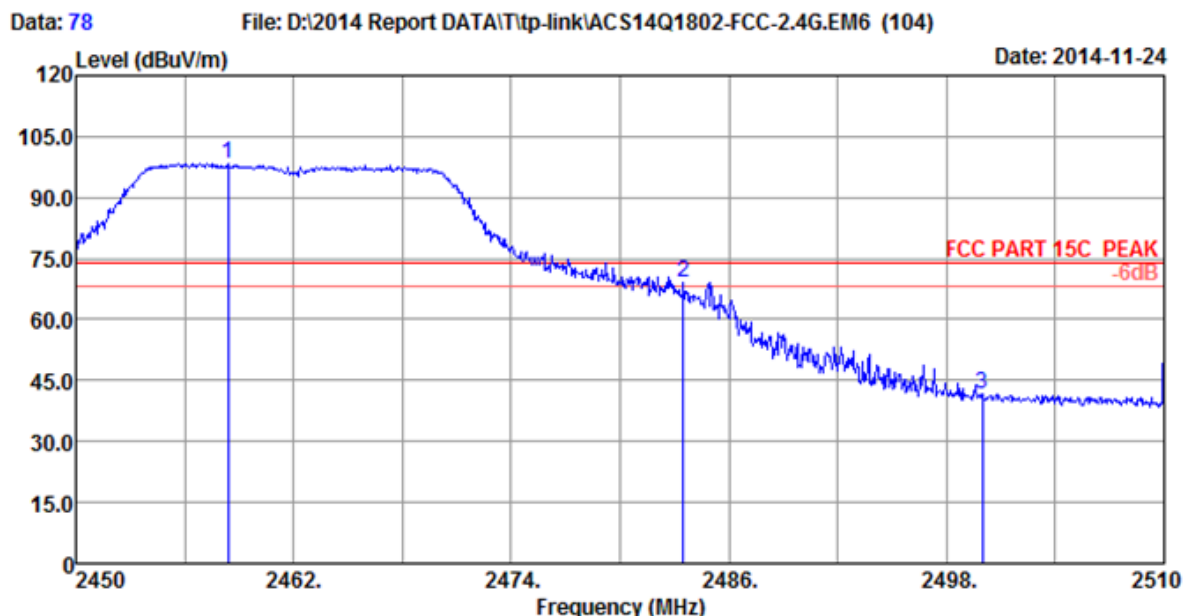


Site no. : 3m Chamber Data No. : 78
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 2462MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2458.400	28.31	5.88	99.83	35.70	98.32	74.00	-24.32	Peak
2	2483.500	28.36	5.92	70.63	35.70	69.21	74.00	4.79	Peak
3	2500.000	28.40	5.94	42.86	35.70	41.50	74.00	32.50	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.

2. The emission levels that are 20dB below the official limit are not reported.

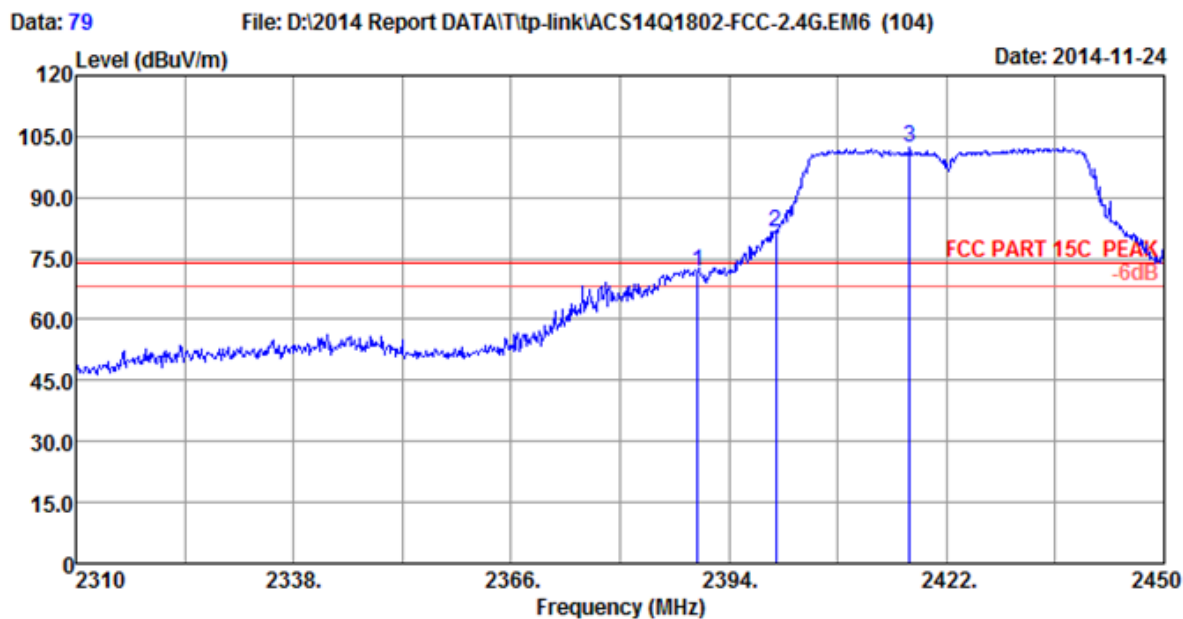


Site no. : 3m Chamber Data No. : 79
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2422MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	28.16	5.78	73.63	35.70	71.87	74.00	2.13	Peak
2	2400.000	28.18	5.80	83.31	35.70	81.59	74.00	-7.59	Peak
3	2417.240	28.22	5.82	103.99	35.70	102.33	74.00	-28.33	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.

2. The emission levels that are 20dB below the official limit are not reported.

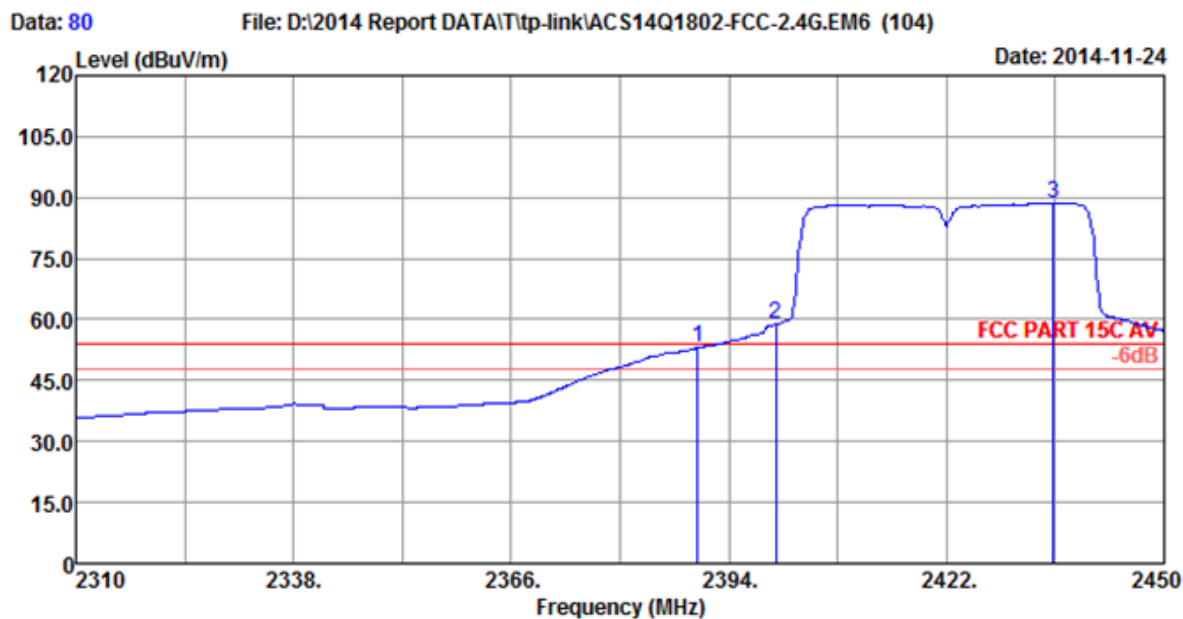


Site no. : 3m Chamber Data No. : 80
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2422MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	28.16	5.78	55.02	35.70	53.26	54.00	0.74	Average
2	2400.000	28.18	5.80	60.56	35.70	58.84	54.00	-4.84	Average
3	2435.720	28.26	5.85	90.33	35.70	88.74	54.00	-34.74	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.


2. The emission levels that are 20dB below the official limit are not reported.

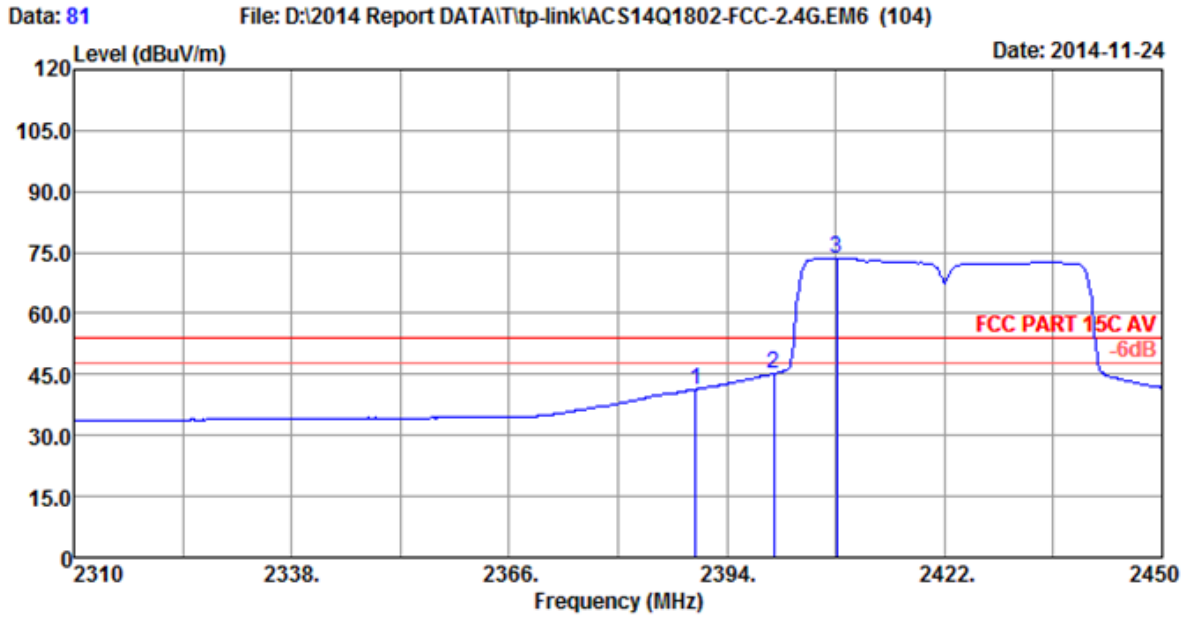

Site no. : 3m Chamber Data No. : 81
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2422MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Amp Factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2390.000	28.16	5.78	43.08	35.70	41.32	54.00	12.68	Average
2	2400.000	28.18	5.80	46.92	35.70	45.20	54.00	8.80	Average
3	2408.140	28.20	5.81	75.22	35.70	73.53	54.00	-19.53	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.
 2. The emission levels that are 20dB below the official limit are not reported.

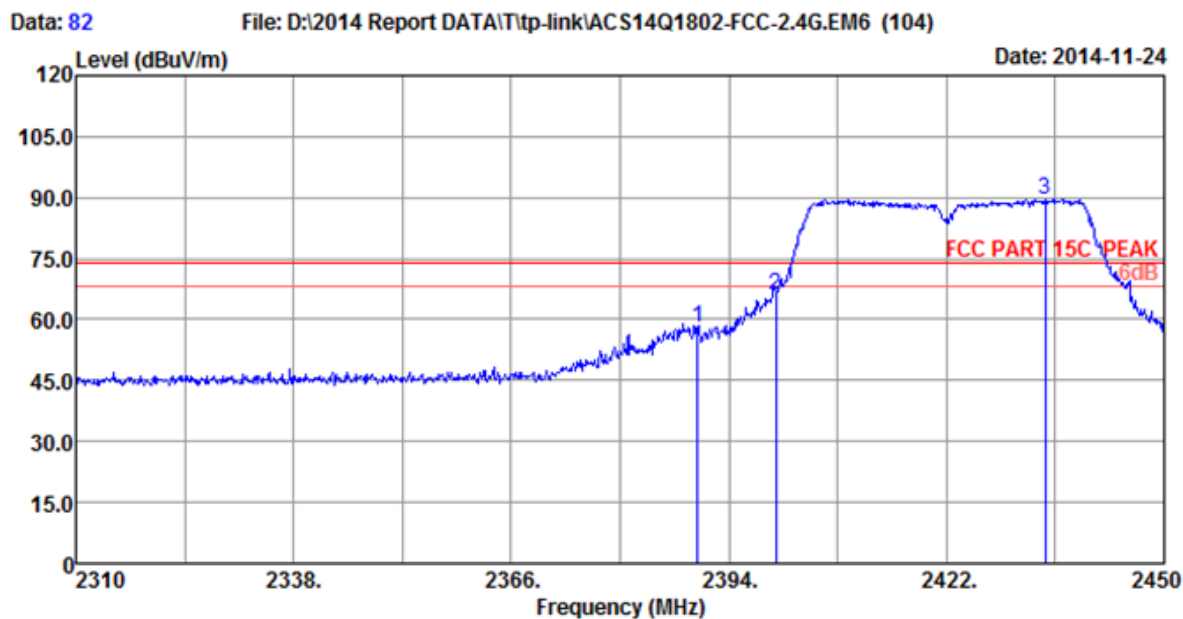


Site no. : 3m Chamber Data No. : 82
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2422MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	28.16	5.78	59.56	35.70	57.80	74.00	16.20	Peak
2	2400.000	28.18	5.80	67.88	35.70	66.16	74.00	7.84	Peak
3	2434.740	28.26	5.85	91.18	35.70	89.59	74.00	-15.59	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.

2. The emission levels that are 20dB below the official limit are not reported.

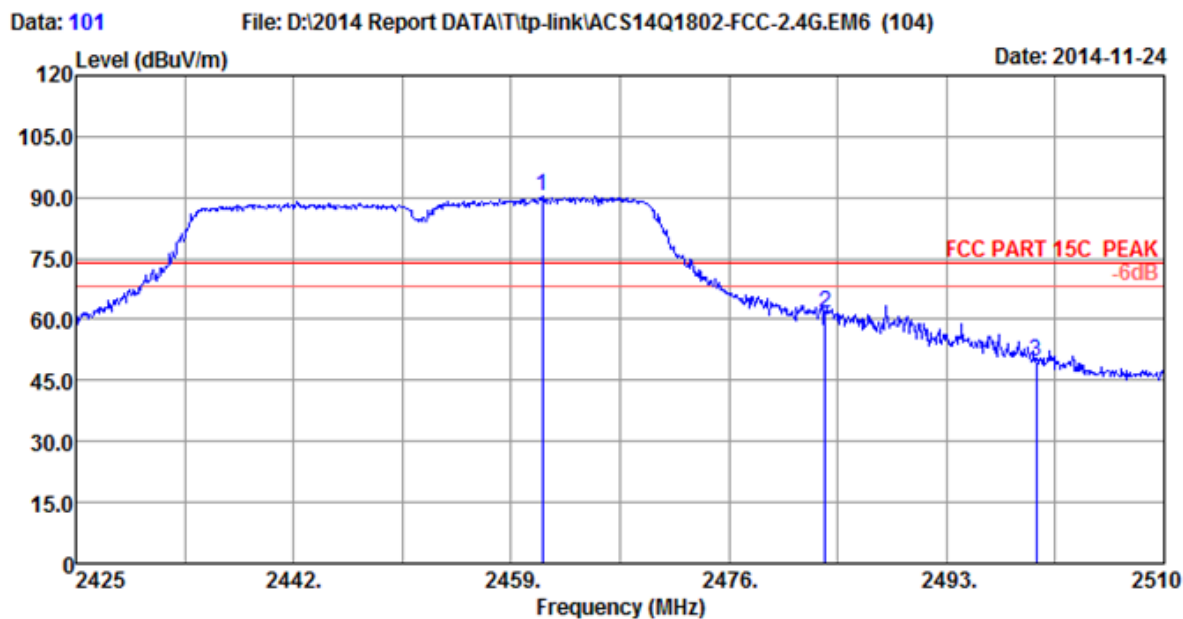


Site no. : 3m Chamber Data No. : 101
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2452MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2461.465	28.32	5.89	91.84	35.70	90.35	74.00	-16.35	Peak
2	2483.500	28.36	5.92	63.13	35.70	61.71	74.00	12.29	Peak
3	2500.000	28.40	5.94	50.98	35.70	49.62	74.00	24.38	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.

2. The emission levels that are 20dB below the official limit are not reported.

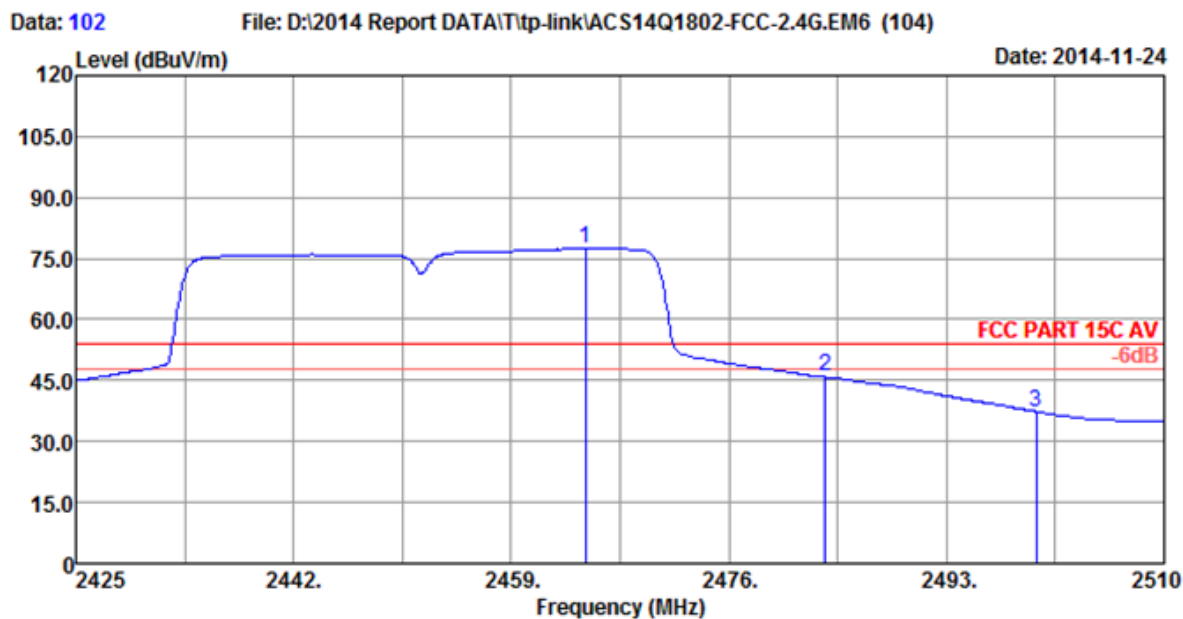


Site no. : 3m Chamber Data No. : 102
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2452MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2464.780	28.32	5.89	79.03	35.70	77.54	54.00	-23.54	Average
2	2483.500	28.36	5.92	47.29	35.70	45.87	54.00	8.13	Average
3	2500.000	28.40	5.94	38.76	35.70	37.40	54.00	16.60	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.

2. The emission levels that are 20dB below the official limit are not reported.

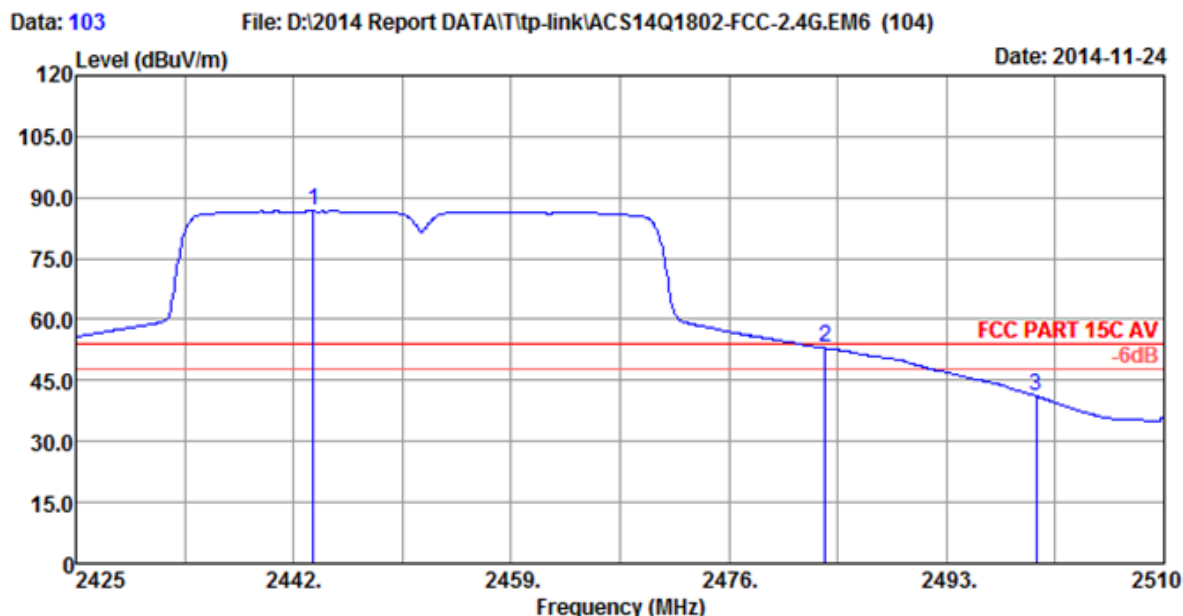


Site no. : 3m Chamber Data No. : 103
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2452MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2443.530	28.28	5.86	88.19	35.70	86.63	54.00	-32.63	Average
2	2483.500	28.36	5.92	54.68	35.70	53.26	54.00	0.74	Average
3	2500.000	28.40	5.94	42.60	35.70	41.24	54.00	12.76	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.

2. The emission levels that are 20dB below the official limit are not reported.

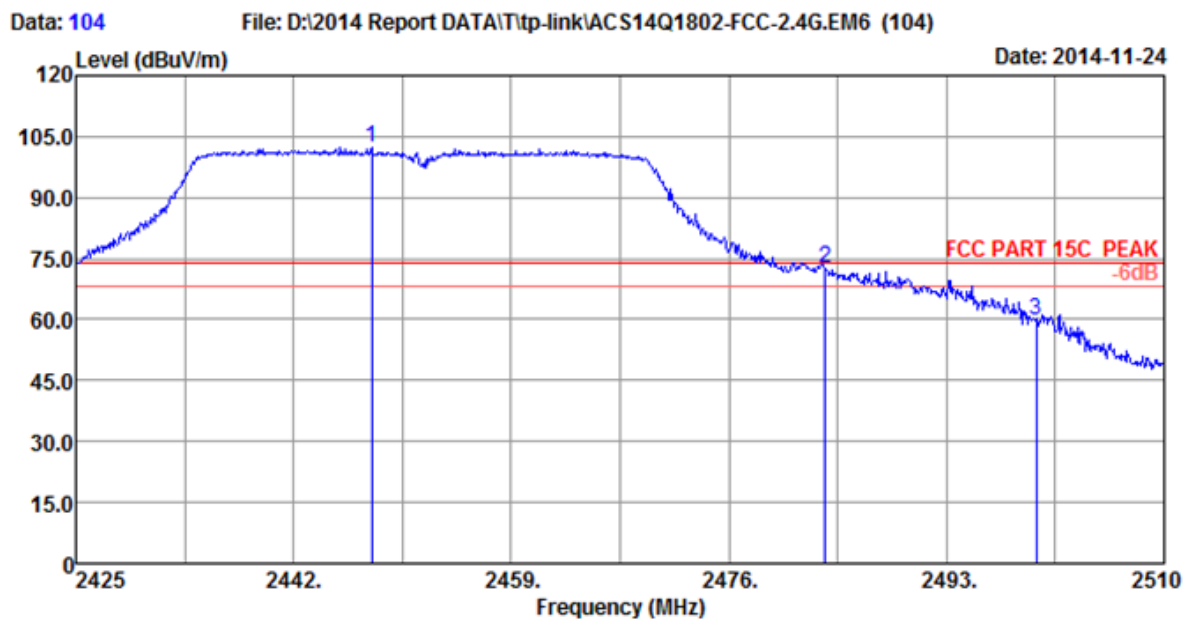

Site no. : 3m Chamber Data No. : 104
 Dis. / Ant. : 3m 2014 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54% Engineer : Leo-Li
 EUT : 150Mbps Wireless N Router
 Power Rating : DC 5V From Adapter Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 2452MHz Tx
 TL-WR740N

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2448.120	28.29	5.87	103.73	35.70	102.19	74.00	-28.19	Peak
2	2483.500	28.36	5.92	73.86	35.70	72.44	74.00	1.56	Peak
3	2500.000	28.40	5.94	61.29	35.70	59.93	74.00	14.07	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading-Amp Factor.
 2. The emission levels that are 20dB below the official limit are not reported.

7. 6dB Bandwidth Test

7.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	E4446A	US44300459	Apr. 28,14	1 Year
2.	Spectrum	Agilent	N9030A	MY51380221	Oct.29, 14	1Year
3.	Attenuator (20dB)	Agilent	8491B	MY39262165	Apr. 28,14	1 Year
4.	RF Cable	Hubersuhner	SUCOFLEX102	28620/2	Apr. 28,14	1 Year

7.2. Limit

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

7.3. Test Procedure

The transmitter output was connected to a spectrum analyzer, The bandwidth of the fundamental frequency was measured by spectrum analyzer with 300kHz RBW and 1MHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.


7.4. Test Results

EUT:150Mbps Wireless N Router		
M/N: TL-WR740N		
Test date: 2014-11-24	Pressure: 101.2±1.0 kpa	Humidity: 49.5±3.0%
Tested by: donjon_huang	Test site: RF site	Temperature:22.7±0.6 °C


Test Mode	CH	-6dB bandwidth (MHz)	Limit (KHz)
11b	CH1	10.13	>500
	CH6	10.12	>500
	CH11	10.09	>500
11g	CH1	16.93	>500
	CH6	16.35	>500
	CH11	16.12	>500
11n HT20	CH1	17.56	>500
	CH6	17.55	>500
	CH11	17.34	>500
11n HT40	CH1	36.44	>500
	CH4	36.34	>500
	CH7	36.28	>500
Conclusion : PASS			

Test Mode: IEEE 802.11b TX

Test CH1: 2412MHz

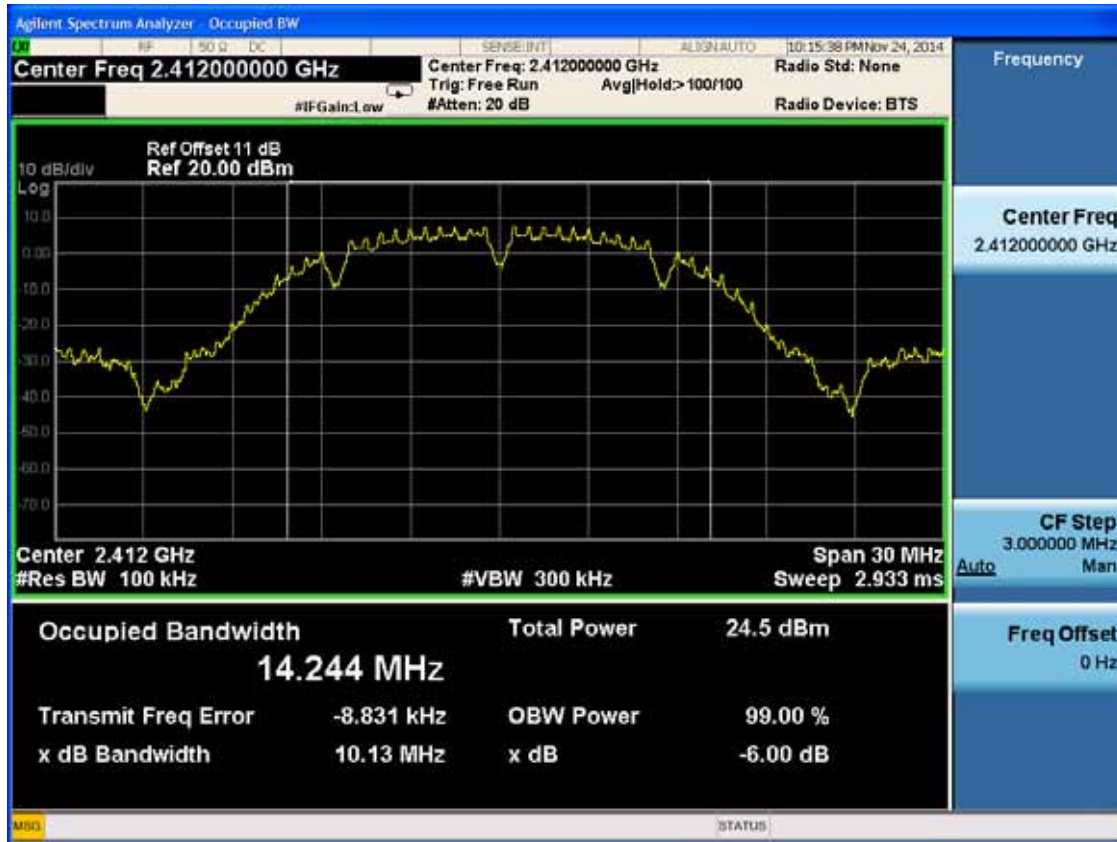

Test CH6: 2437MHz

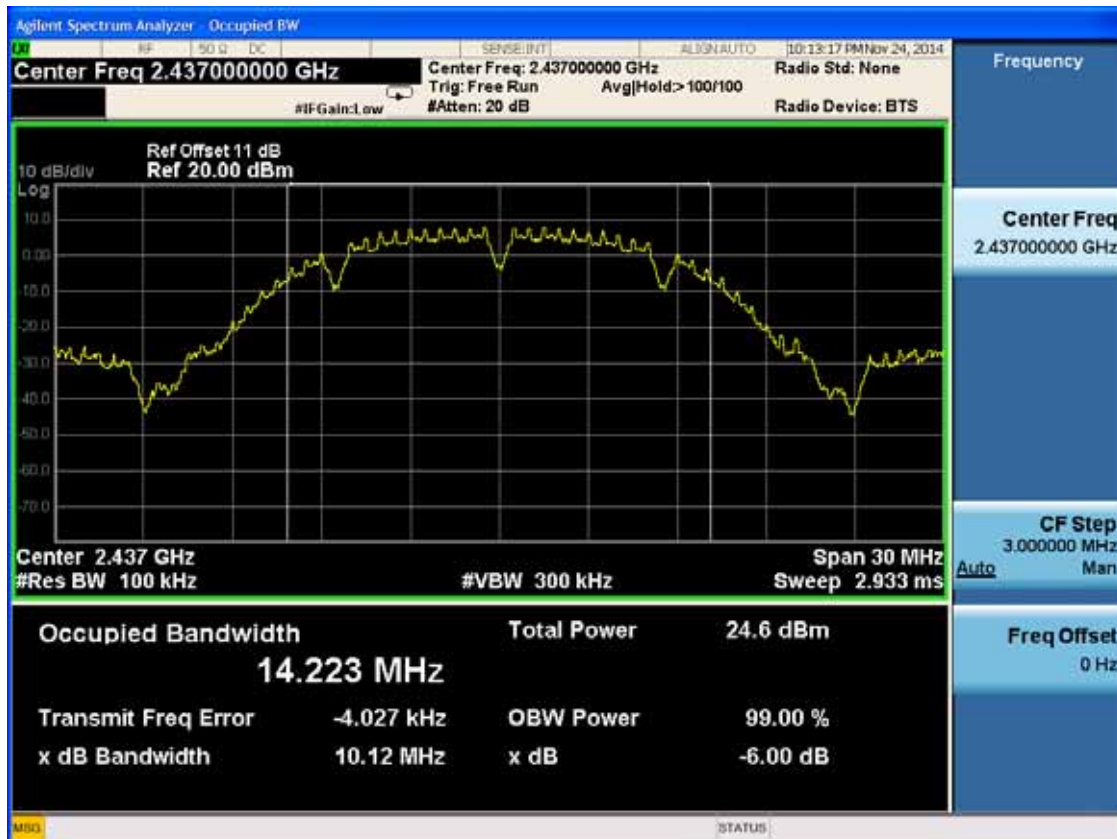


Test CH11: 2462MHz




Test Mode: IEEE 802.11g TX


Test CH1: 2412MHz

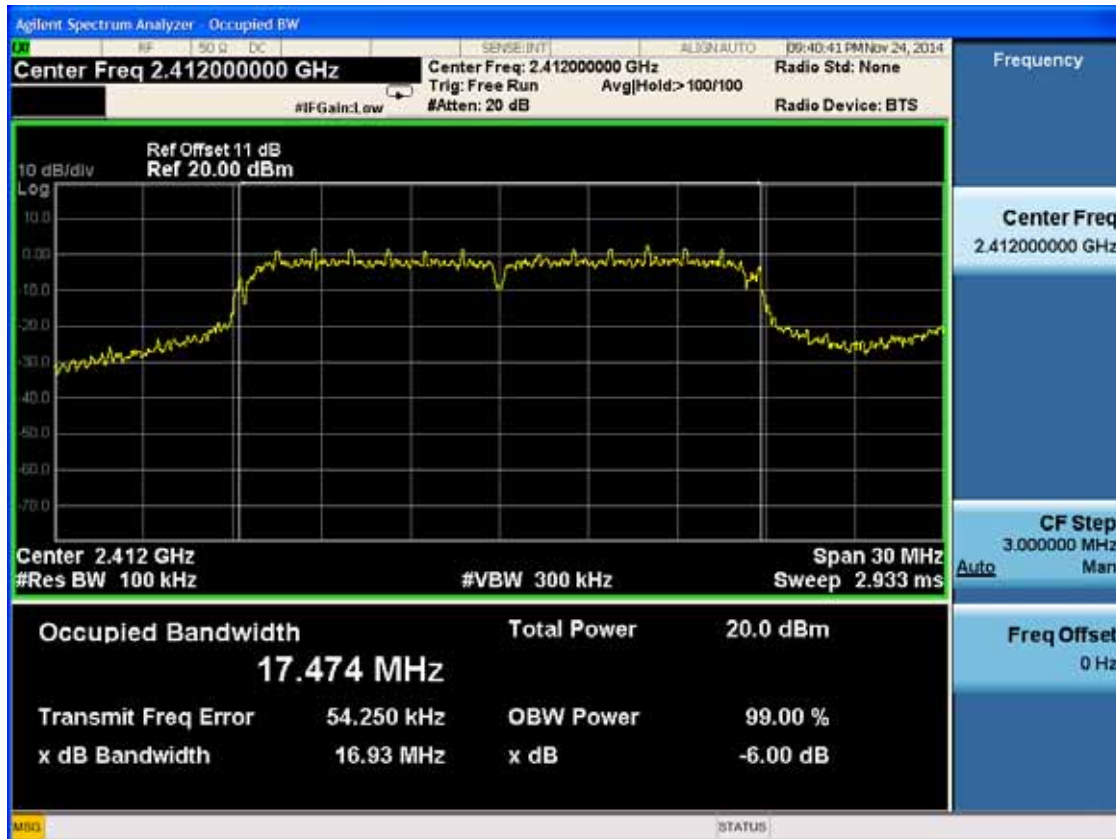


Test CH6: 2437MHz

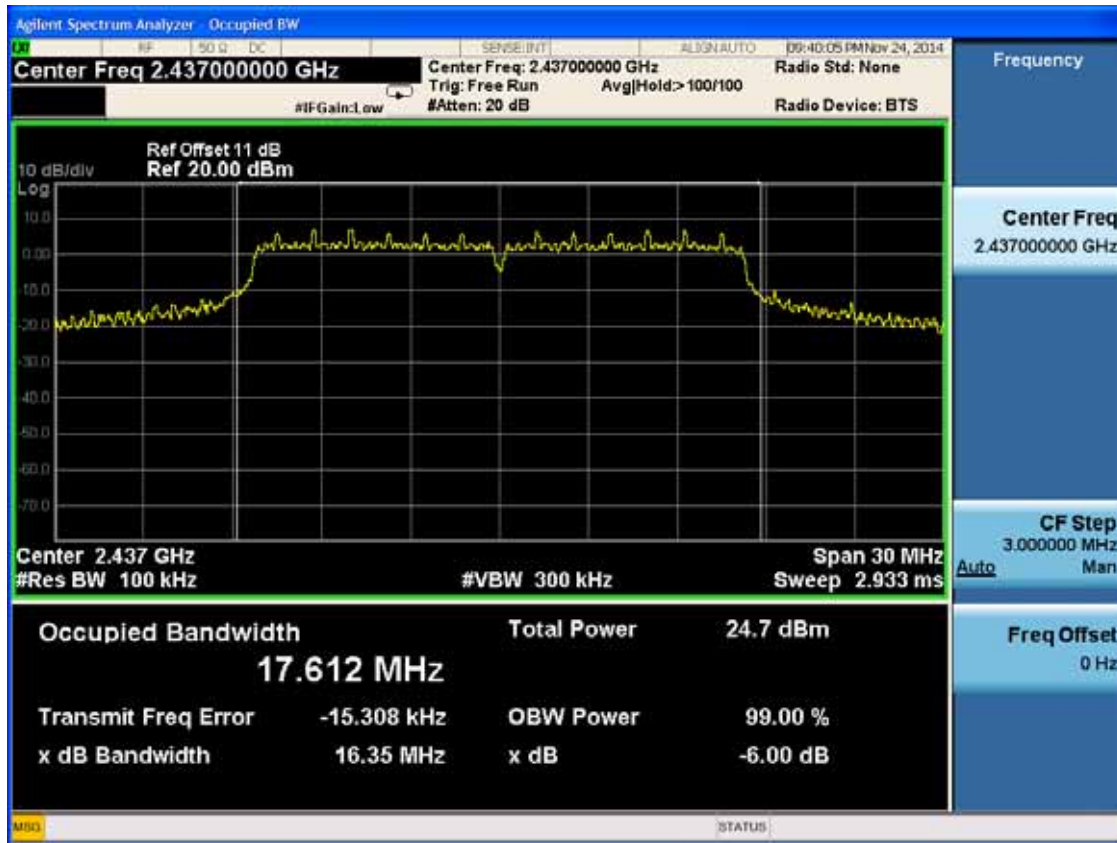


Test CH11: 2462MHz

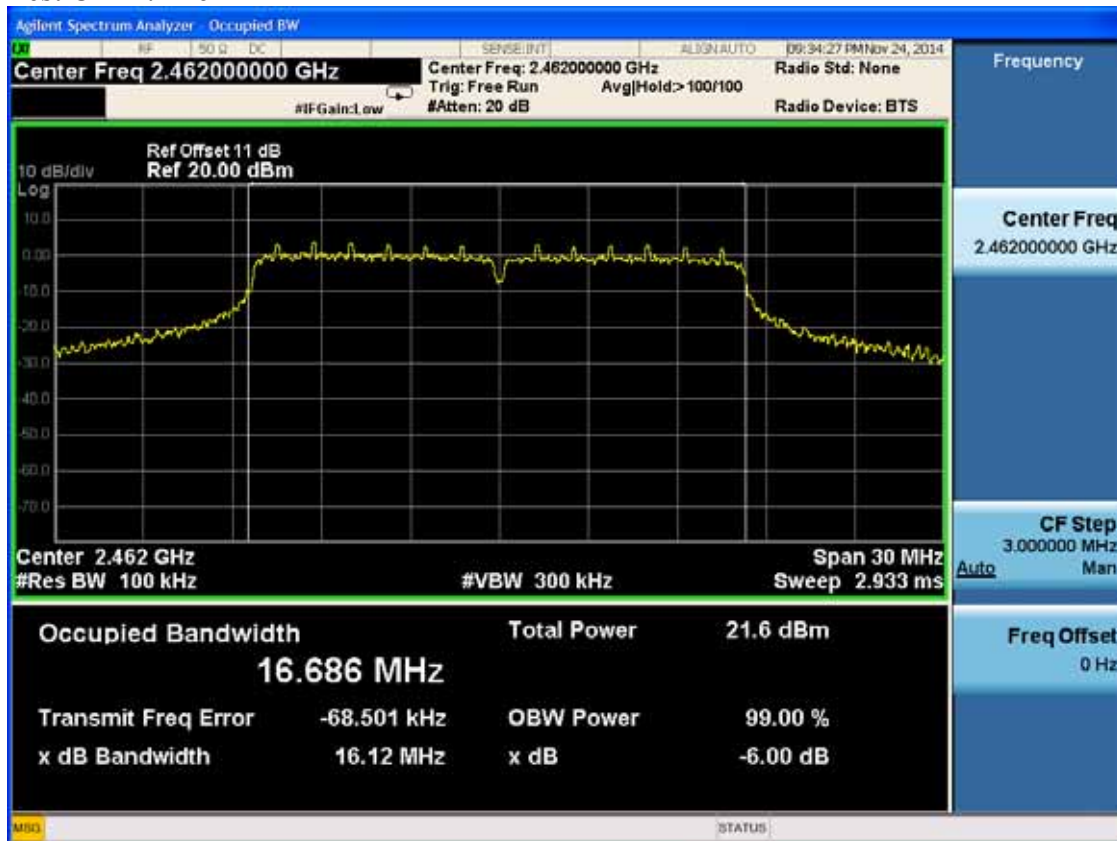


Test Mode: IEEE 802.11n HT20 TX
Test CH1: 2412MHz

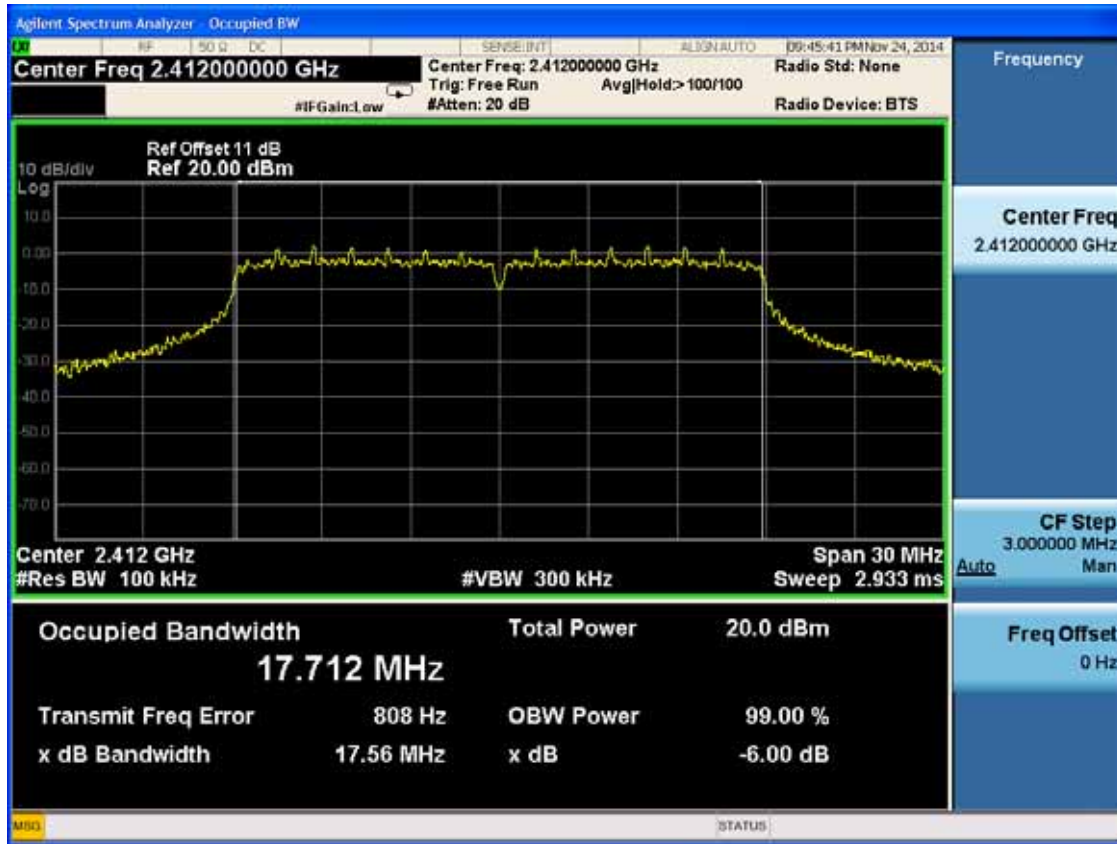

Test CH6: 2437MHz

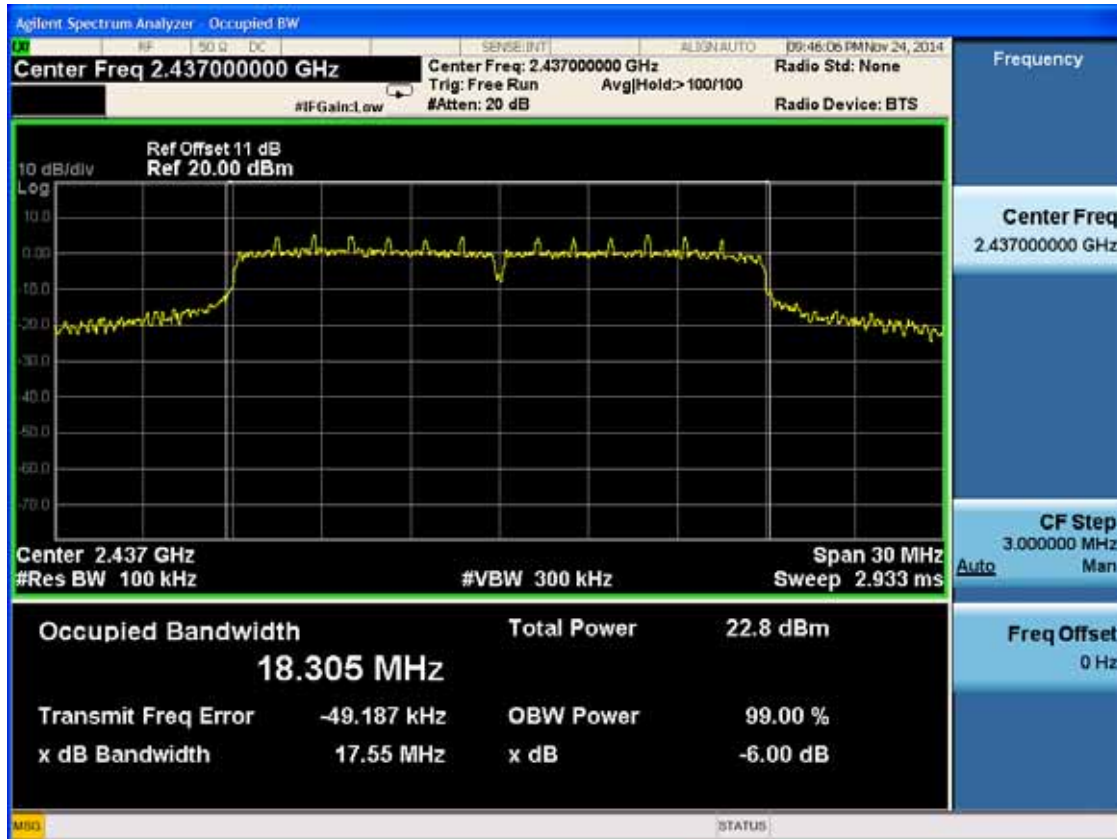


Test CH11: 2462MHz

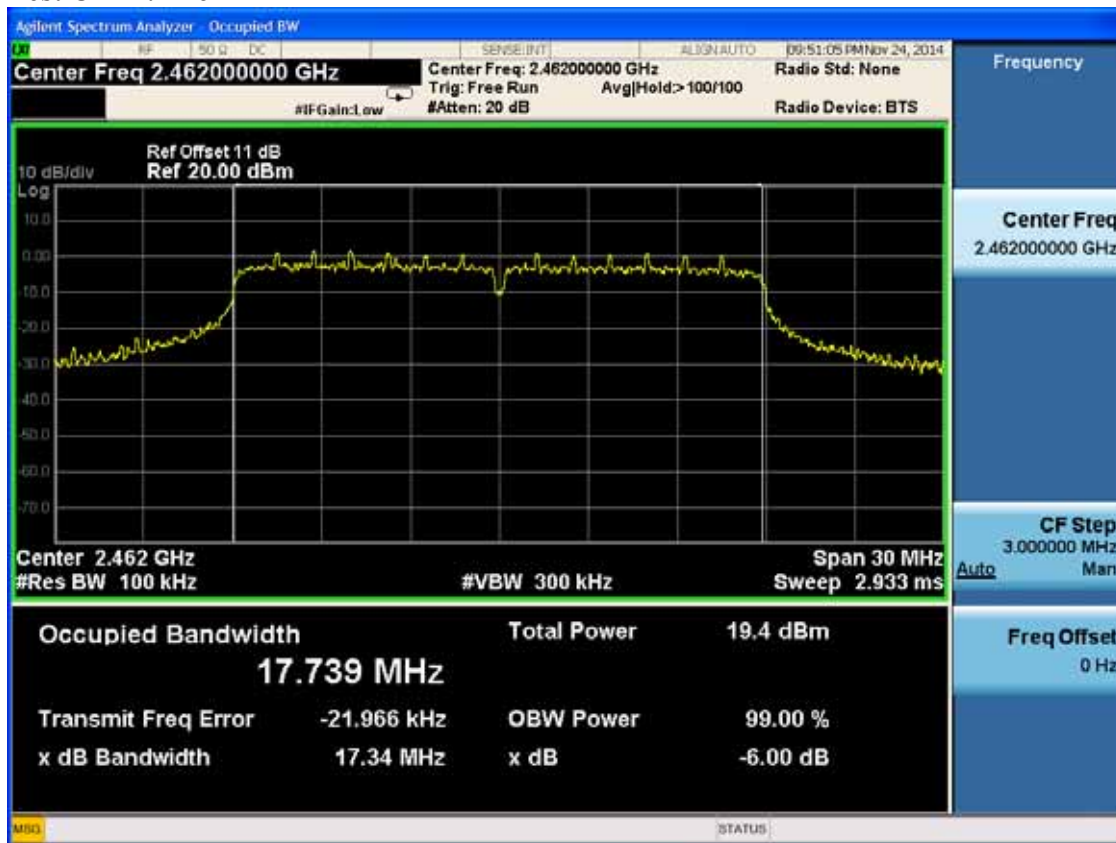

Test Mode: IEEE 802.11n HT40 TX

Test CH1: 2422MHz

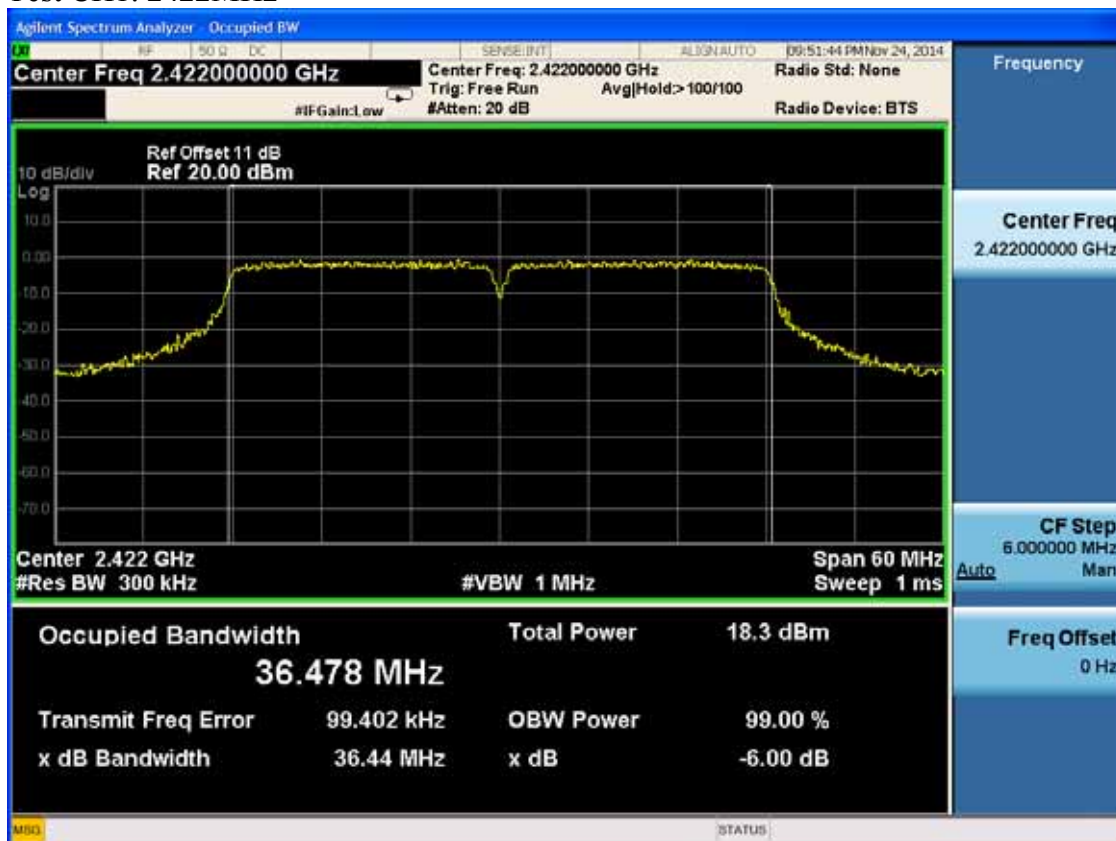

Test CH4: 2437MHz



Test CH7: 2452MHz



8. OUTPUT POWER TEST

8.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	N9030A	MY51380221	Oct.29, 14	1 Year
2.	Power meter	Anritsu	ML2487A	6K00002472	Apr. 28,14	1 Year
3.	Power sensor	Anritsu	MA2491A	0033005	Apr. 28,14	1 Year
4.	Attenuator (20dB)	Agilent	8491B	MY39262165	Apr. 28,14	1 Year
5.	RF Cable	Hubersuhner	SUCOFLEX102	28610/2	Apr. 28,14	1 Year

8.2. Limit (FCC Part 15C 15.247 b(3))

For systems using digital modulation in the 2400—2483.5MHz, The Peak out put Power shall not exceed 1W(30dBm)

8.3. Test Procedure

- 1, Connected the EUT's antenna port to measure device by 26dB attenuator.
- 2, For IEEE 802.11b/g and IEEE802.11n HT20 mode, use a PK power meter which's bandwidth is 20MHz and above 26dB bandwidth of signal to measure out each test modes' PK output power.
- 3, For IEEE802.11n HT40&802.11nVHT40&VHT80 mode, because the signal's bandwidth is about 40MHz and above 20MHz bandwidth of power sensor ML2491A. So use the test method described in KDB558074 clause 9.1.2.
 - 1) Set the RBW=1MHz and VBW =3MHz
 - 2) Set the span to a value that is 5-30% greater than EBW
 - 3) Detector = peak
 - 4) Sweep time = auto couple
 - 5) Trace Mode = max hold
 - 6) allow trace to fully stabilize
 - 7) use the spectrum analyser's integrated band power measurement function with band limits set equal to the EBW band edges.


Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

8.4. Test Results

EUT:150Mbps Wireless N Router			
M/N: TL-WR740N			
Test date: 2014-11-07		Pressure: 101.4±1.0 kpa	Humidity: 50.7±3.0%
Tested by: donjon_huang		Test site: RF site	Temperature:22.5±0.6 °C
Test Mode	CH	Peak output Power (dBm)	Limit (dBm)
11b	CH1	17.58	30
	CH6	17.61	30
	CH11	17.47	30
11g	CH1	14.25	30
	CH6	17.68	30
	CH11	16.92	30
11n HT20	CH1	12.65	30
	CH6	17.65	30
	CH11	13.21	30
11n HT40	CH1	12.73	30
	CH4	17.61	30
	CH7	12.02	30
Conclusion: PASS			

Test Mode: IEEE 802.11n HT40 TX

Test CH1: 2422MHz

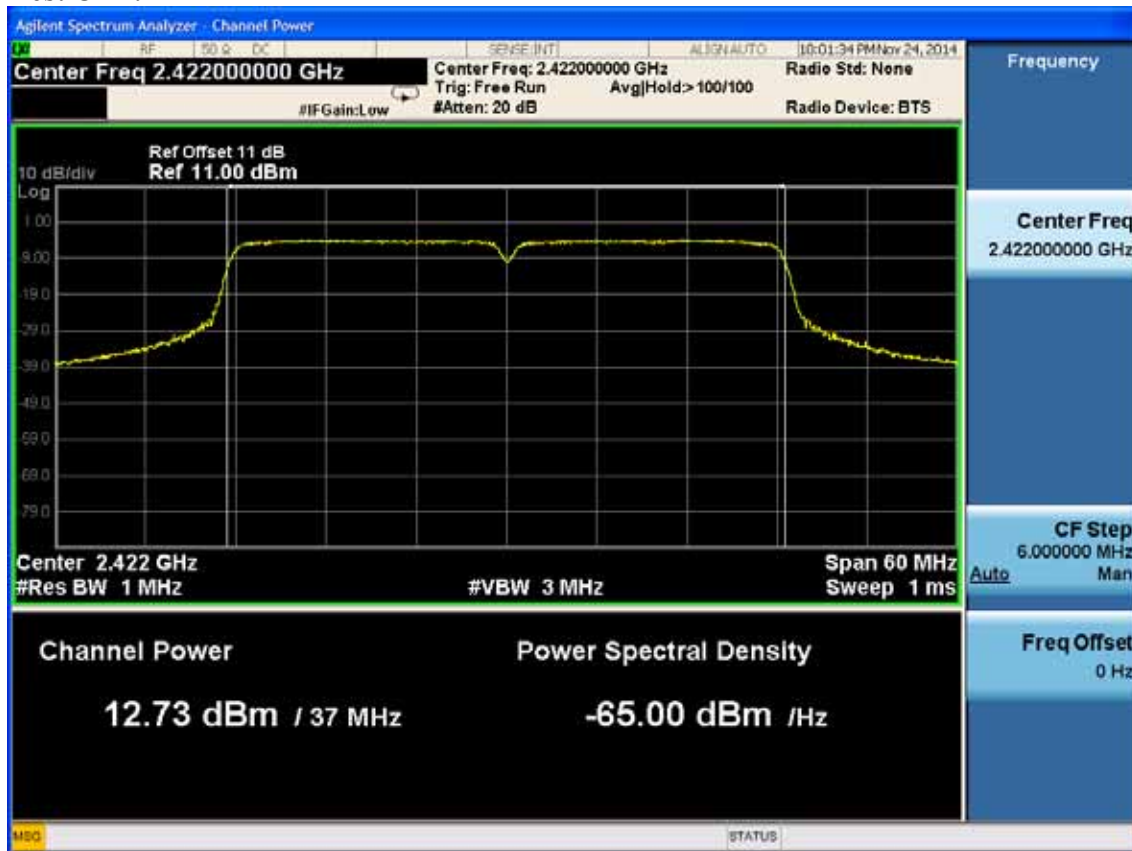

Test CH4: 2437MHz



Test CH7: 2452MHz



9. POWER SPECTRAL DENSITY TEST

9.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	N9030A	MY51380221	Oct.29, 14	1 Year
2.	Attenuator (20dB)	Agilent	8491B	MY39262165	Apr. 28,14	1 Year
3	RF Cable	Hubersuhner	SUCOFLEX102	28610/2	Apr. 28,14	1 Year

9.2. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

9.3. Test Procedure

1. Connected the EUT's antenna port to spectrum analyzer device by 20dB attenuator.
2. Set the test frequency as center frequency, Set RBW=3KHz, VBW=10KHz, Span large enough
capture the entire frequency, Read out maximum peak level frequency
3. Set the frequency read from produce 2 as center frequency, then set the span= 300KHz, Sweep
time=Span/RBW, Then Max hold, read out each mode and each ANT's Power density.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude

9.4. Test Results

EUT:150Mbps Wireless N Router		
M/N: TL-WR740N		
Test date: 2014-11-24	Pressure: 101.3±1.0 kpa	Humidity:49.5±3.0%
Tested by: donjon_huang	Test site: RF Site	Temperature:22.6±0.6℃

Test Mode	CH	Power density (dBm/3KHz)	Limit (dBm/3KHz)
11b	CH1	-6.684	8
	CH6	-7.648	8
	CH11	-6.752	8
11g	CH1	-10.452	8
	CH6	-7.965	8
	CH11	-13.057	8

11n Mode


Test Mode	CH	Power density (dBm/3KHz)	Limit (dBm/3KHz)
11n HT20	CH1	-11.432	8
	CH6	-9.745	8
	CH11	-13.076	8
11n HT40	CH3	-15.885	8
	CH6	-11.535	8
	CH9	-16.947	8

Conclusion : PASS


Note: 1. 11b/g working at CDD mode which described in KDB662911, and 11n Mode use MIMO,
so directional Gain = 2 + Array Gain = 2 + 10log3 = 6.8dBi > 6dBi

Test Mode: IEEE 802.11b TX

Test CH1: 2412MHz

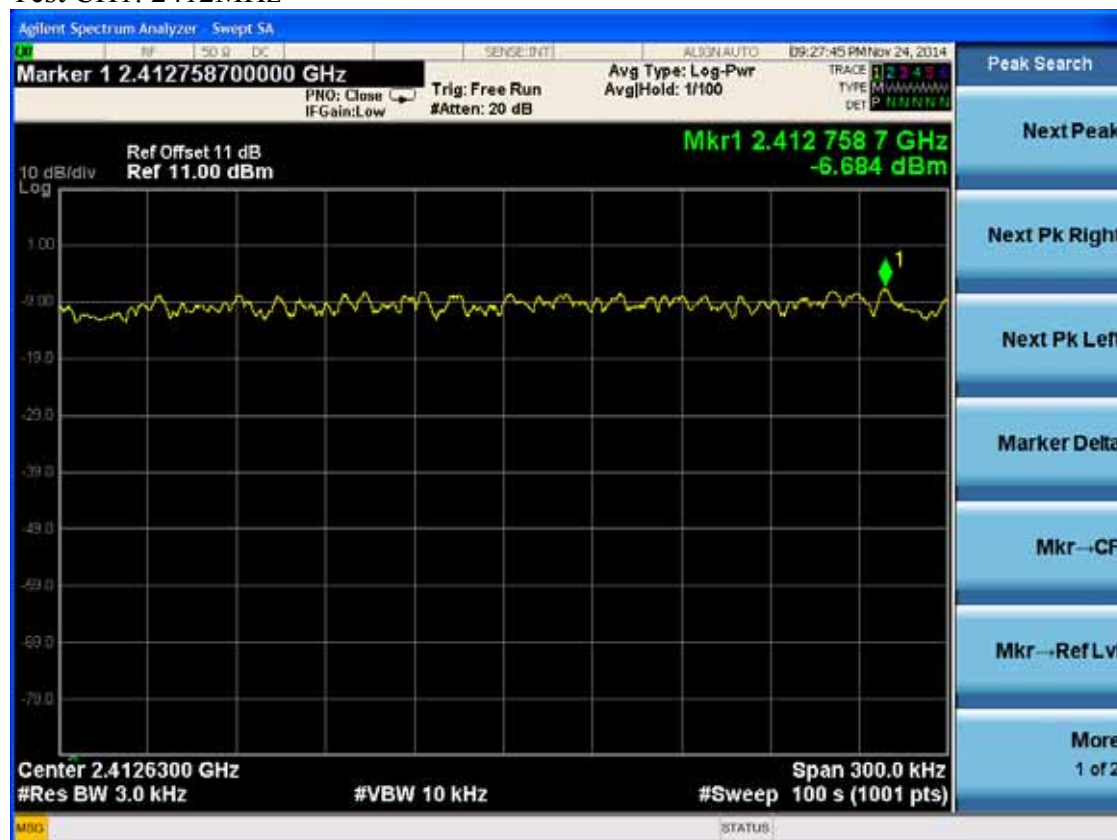

Test CH6: 2437MHz

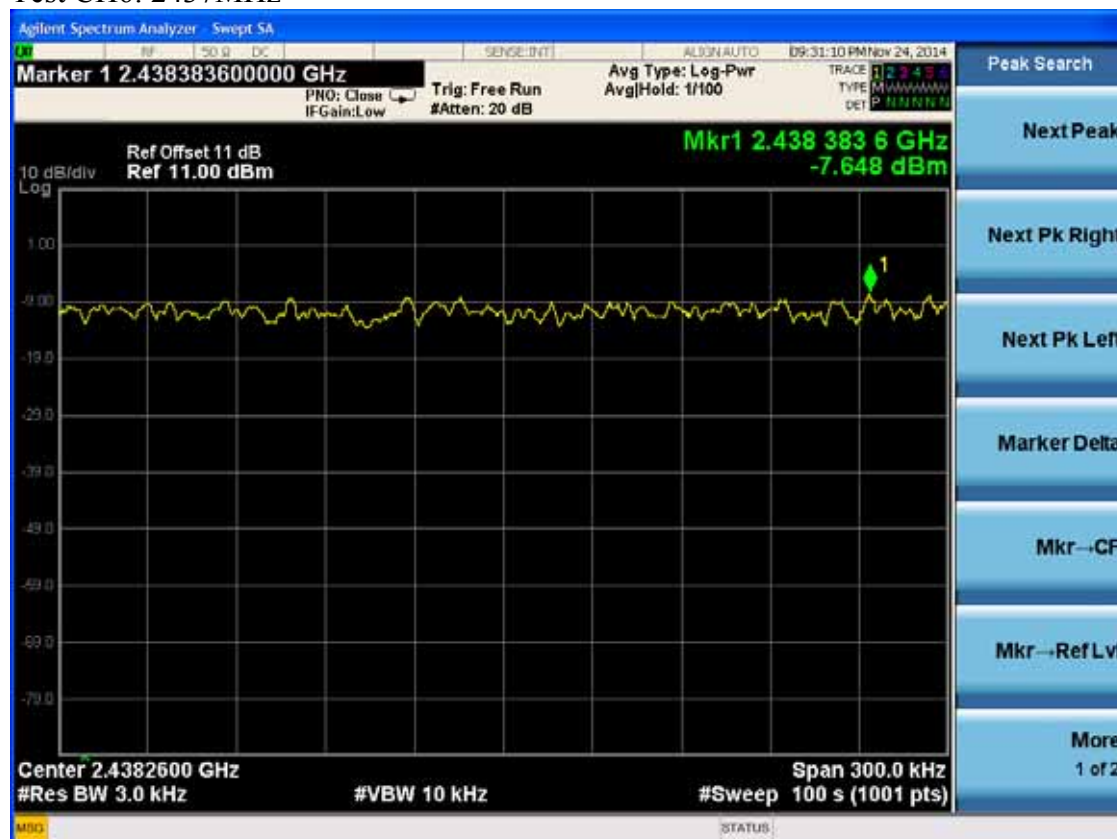

Test CH11: 2462MHz



Test Mode: IEEE 802.11g TX

Test CH1: 2412MHz



Test CH6: 2437MHz



Test CH11: 2462MHz



Test Mode: IEEE 802.11n HT20 TX

Test CH1: 2412MHz



Test CH6: 2437MHz



Test CH11: 2462MHz



Test Mode: IEEE 802.11n HT40 TX

Test CH1: 2422MHz



Test CH4: 2437MHz



Test CH7: 2452MHz



10. ANTENNA REQUIREMENT

10.1. STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

10.2. ANTENNA CONNECTED CONSTRUCTION

The antennas used for this product are dipole antenna that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 5 dBi.