

FCC 47 CFR PART 15 SUBPART C

RF Test Report

Applicant : TP-LINK TECHNOLOGIES CO., LTD.
Applicant Address : Building 24 (floors 1,3,4,5) and 28 (floors1-4) Central Science and Technology Park,Shennan Rd, Nanshan, Shenzhen,China
Product Type : 300Mbps High Power Wireless N Router
Trade Name : TP-LINK
Model Number : TL-WR841HP
Applicable Standard : FCC 47 CFR PART 15 SUBPART C: Oct., 2014
ANSI C63.10:2013
Receive Date : Jun. 08, 2015
Test Period : Jun. 22 ~ Sep. 07, 2015
Issue Date : Oct. 12, 2015

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Note: This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.

Revision History

Rev.	Issue Date	Revisions	Revised By
00	Sep. 22, 2015	Initial Issue	
01	Oct. 12, 2015	Revised report information.	Peggy Chang

Verification of Compliance

Issued Date: 10/12/2015

Applicant : TP-LINK TECHNOLOGIES CO., LTD.
Address Applicant : Building 24 (floors 1,3,4,5) and 28 (floors1-4) Central Science and Technology Park,Shennan Rd, Nanshan, Shenzhen,China
Product Type : 300Mbps High Power Wireless N Router
Trade Name : TP-LINK
Model Number : TL-WR841HP
FCC ID : TE7WR841HPV2
EUT Rated Voltage : DC 12V, 1A
Test Voltage : 120 Vac / 60 Hz
Applicable Standard : FCC 47 CFR PART 15 SUBPART C: Oct., 2014
ANSI C63.10:2013
Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330
<http://www.atl-lab.com.tw/e-index.htm>



A Test Lab Techno Corp. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by A Test Lab Techno Corp. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : Fly Lu Reviewed By : Eric Ou Yang
(Manager) (Fly Lu) (Testing Engineer) (Eric Ou Yang)

TABLE OF CONTENTS

1	General Information	6
2	EUT Description	7
3	Test Methodology	8
3.1.	Mode of Operation.....	8
3.2.	EUT Exercise Software	12
3.3.	Configuration of Test System Details	13
3.4.	Test Site Environment	14
4	Conducted Emission Measurement	15
4.1.	Limit	15
4.2.	Test Instruments	15
4.3.	Test Setup.....	15
4.4.	Test Procedure	16
4.5.	Test Result.....	17
5	Radiated Emission Measurement.....	19
5.1.	Limit	19
5.2.	Test Instruments	19
5.3.	Setup	20
5.4.	Test Procedure	22
5.5.	Test Result.....	24
6	Maximum Conducted Output Power Measurement.....	31
6.1.	Limit	31
6.2.	Test Setup.....	31
6.3.	Test Instruments	31
6.4.	Test Procedure	31
6.5.	Test Result.....	32
7	6dB RF Bandwidth Measurement.....	34
7.1.	Limit	34
7.2.	Test Setup.....	34
7.3.	Test Instruments	34
7.4.	Test Procedure	34
7.5.	Test Result.....	35
7.6.	Test Graphs	36
8	Maximum Power Density Measurement	44
8.1.	Limit	44
8.2.	Test Setup.....	44
8.3.	Test Instruments	44
8.4.	Test Procedure	45
8.5.	Test Result.....	46
8.6.	Test Graphs	47

9	Out of Band Conducted Emissions Measurement	55
9.1.	Limit	55
9.2.	Test Setup.....	55
9.3.	Test Instruments	55
9.4.	Test Procedure	55
9.5.	Test Graphs	56
10	Band Edges Measurement	80
10.1.	Limit	80
10.2.	Test Setup.....	80
10.3.	Test Instruments	80
10.4.	Test Procedure	81
10.5.	Test Result.....	82
11	Antenna Measurement.....	86
11.1.	Limit	86
11.2.	Antenna Connector Construction	86

1 General Information

1.1 Summary of Test Result

Standard	Item	Result	Remark
15.247			
15.207	AC Power Conducted Emission	PASS	-----
Standard	Item	Result	Remark
15.247			
15.247(d)	Transmitter Radiated Emissions	PASS	-----
15.247(b)(3)	Max. Output Power	PASS	-----
15.247(a)(2)	6dB RF Bandwidth	PASS	-----
15.247(e)	Power Spectral Density	PASS	-----
15.247(d)	Out of Band Conducted Spurious Emission	PASS	-----
15.247(d)	Band Edge Measurement	PASS	-----
15.203	Antenna Requirement	PASS	-----

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

1.2 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Conducted Emission	9kHz ~ 150KHz	2.7
	150kHz ~ 30MHz	2.8
Radiated Emission	30MHz ~ 1000MHz	6.300
	1000MHz ~ 18000MHz	5.474
	18000MHz ~ 26500MHz	5.630
	26500MHz ~ 40000MHz	5.054

2 EUT Description

Applicant	TP-LINK TECHNOLOGIES CO., LTD.			
Applicant Address	Building 24 (floors 1,3,4,5) and 28 (floors1-4) Central Science and Technology Park,Shennan Rd, Nanshan, Shenzhen,China			
Manufacturer	TP-LINK TECHNOLOGIES CO., LTD.			
Manufacturer Address	Building 24 (floors 1,3,4,5) and 28 (floors1-4) Central Science and Technology Park,Shennan Rd, Nanshan, Shenzhen,China			
Product Type	300Mbps High Power Wireless N Router			
Trade Name	TP-LINK			
Model Number	TL-WR841HP			
FCC ID	TE7WR841HPV2			
Operate Freq. Band	Frequency Range (MHz)	Modulation	Channel Bandwidth	Data Rate
IEEE 802.11b	2412 ~ 2462	DSSS	20MHz	Up to 11Mbps
IEEE 802.11g	2412 ~ 2462	DSSS+OFDM	20MHz	Up to 54Mbps
IEEE 802.11n 2.4GHz 20MHz	2412 ~ 2462	OFDM	20MHz	Up to 144.4Mbps
IEEE 802.11n 2.4GHz 40MHz	2422 ~ 2452	OFDM	40MHz	Up to 300Mbps
Antenna Delivery	2TX + 2RX			
Antenna Type	External dismountable Antenna			
Antenna Gain	9 dBi			

Frequency Band	Max. RF Output Power (W)
IEEE 802.11b	0.204
IEEE 802.11g	0.250
IEEE 802.11n 2.4GHz 20MHz	0.246
IEEE 802.11n 2.4GHz 40MHz	0.076

3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Normal operation mode
Mode 2: IEEE 802.11b link mode
Mode 3: IEEE 802.11g link mode
Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode
Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

Test Mode	ANT-0	ANT-1	ANT-0+1
Mode 2: IEEE 802.11b link mode	V	V	V
Mode 3: IEEE 802.11g link mode	V	V	V
Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode	V	V	V
Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode	V	V	V


Test Mode	Antenna Delivery	Test Channel	Data Rate
Mode 2: IEEE 802.11b link mode	2TX / 2RX	1, 6, 11	1
Mode 3: IEEE 802.11g link mode	2TX / 2RX	1, 6, 11	6
Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode	2TX / 2RX	1, 6, 11	13
Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode	2TX / 2RX	3, 6, 9	27

Duty cycle

Test Mode	Frequency (MHz)	on time (ms)	on+off time (ms)	Duty cycle	Duty Factor (dB)	1/T Minimum VBW (kHz)
Mode 2: IEEE 802.11b link mode	2412.0	1.000	1.000	1.000	0.000	0.010
Mode 3: IEEE 802.11g link mode	2412.0	2.050	2.075	0.988	0.053	0.010
Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode	2412.0	1.912	1.938	0.987	0.059	0.010
Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode	2422.0	0.950	0.963	0.987	0.057	0.010


Duty Cycle Graphs

Mode 2: IEEE 802.11b link mode

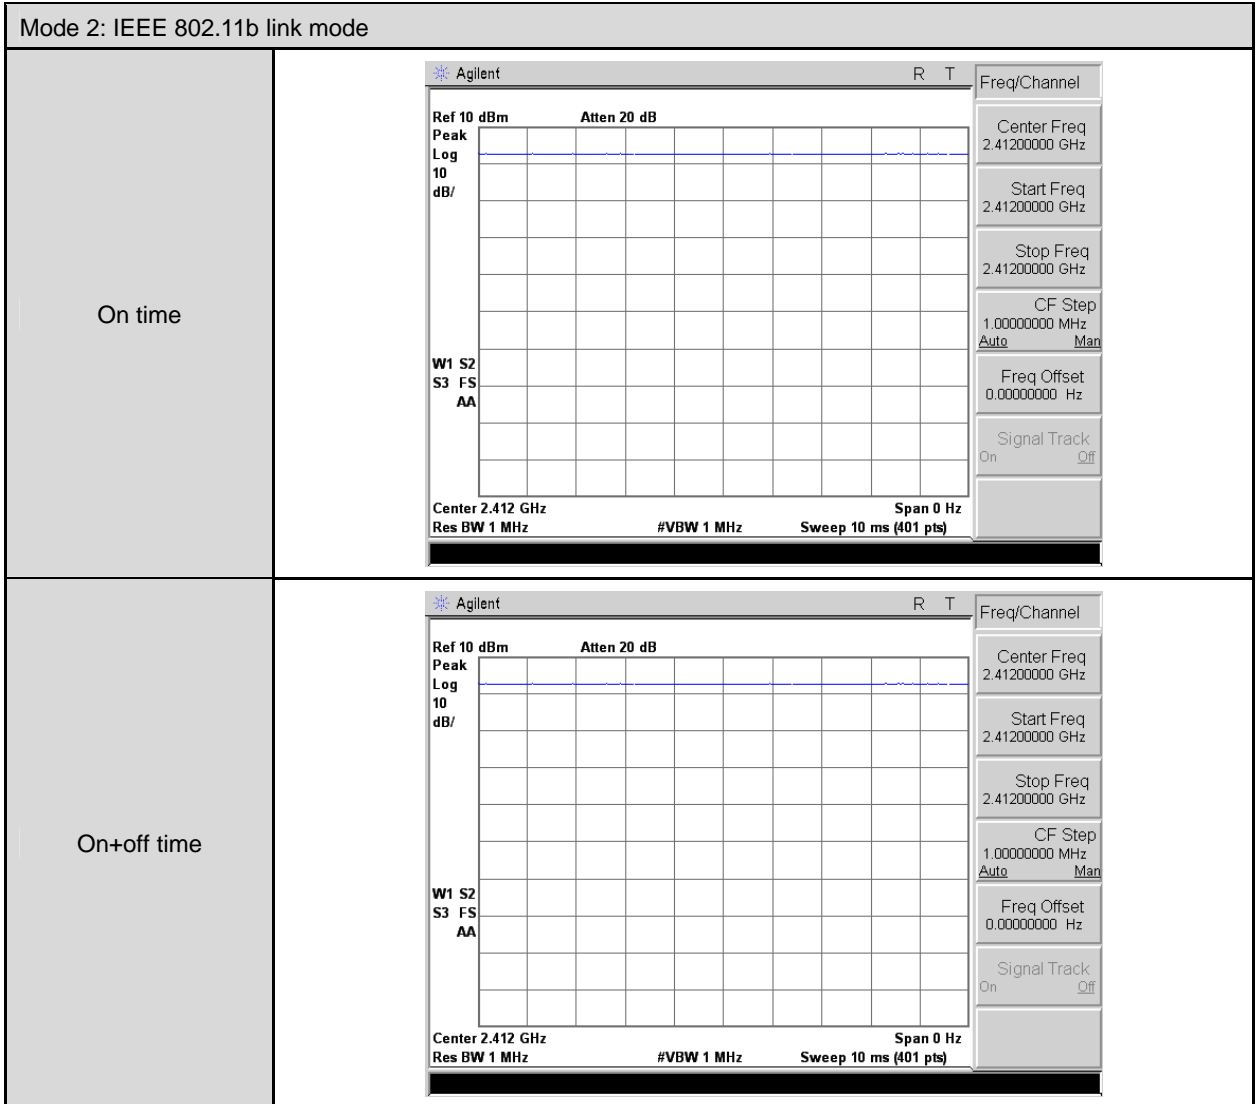


Mode 3: IEEE 802.11g Mode

On time

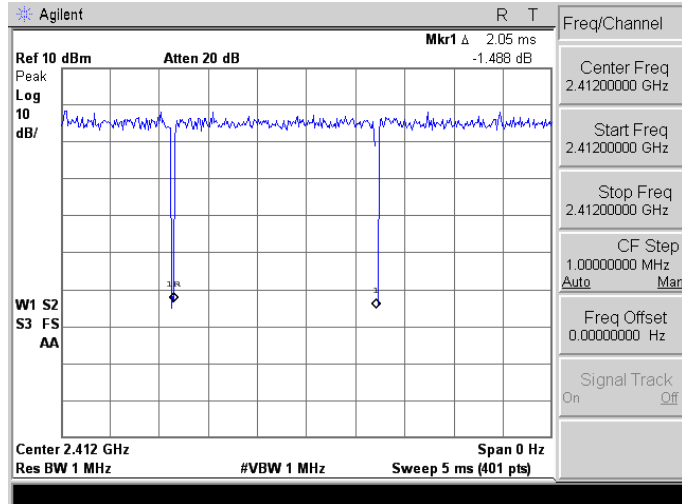


On+off time

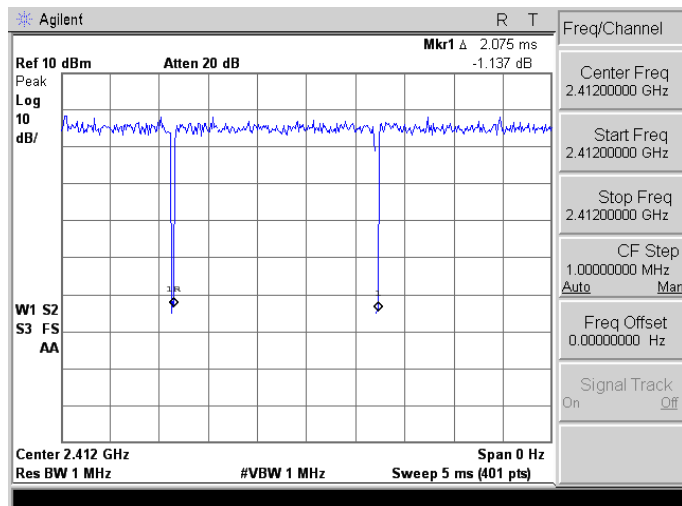


Mode 4: IEEE 802.11n 2.4GHz 20MHz Mode

On time

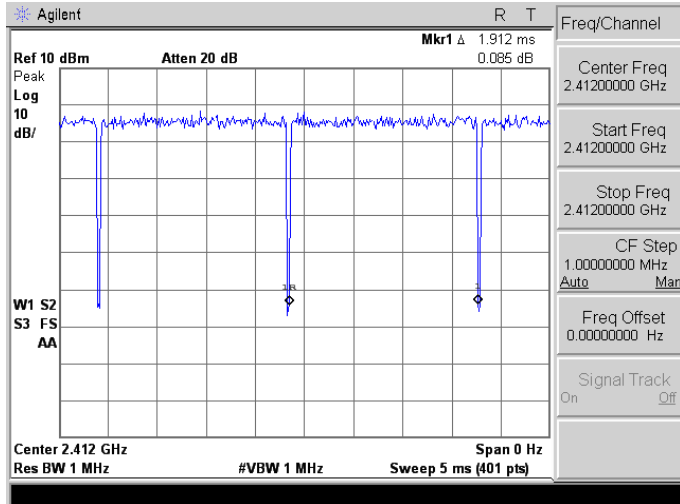

On+off time

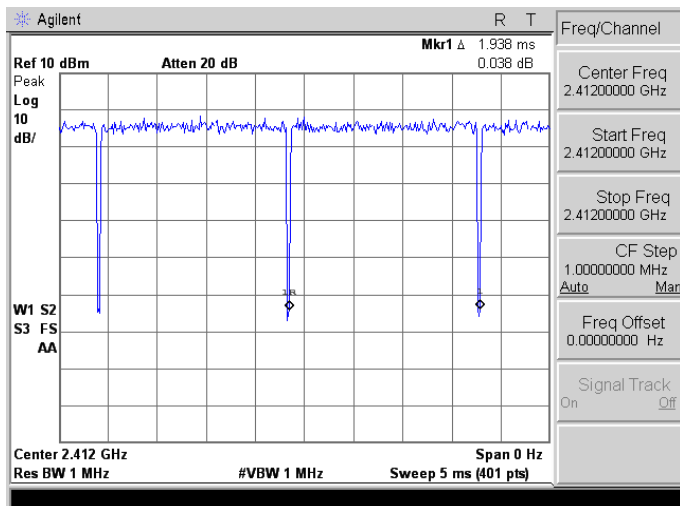




3.2. EUT Exercise Software


- | |
|--|
| 1. Setup the EUT shown on 3.3. |
| 2. Turn on the power of all equipment. |
| 3. Turn on Wi-Fi function. |
| 4. EUT run test program. |

3.3. Configuration of Test System Details

Conducted Emissions

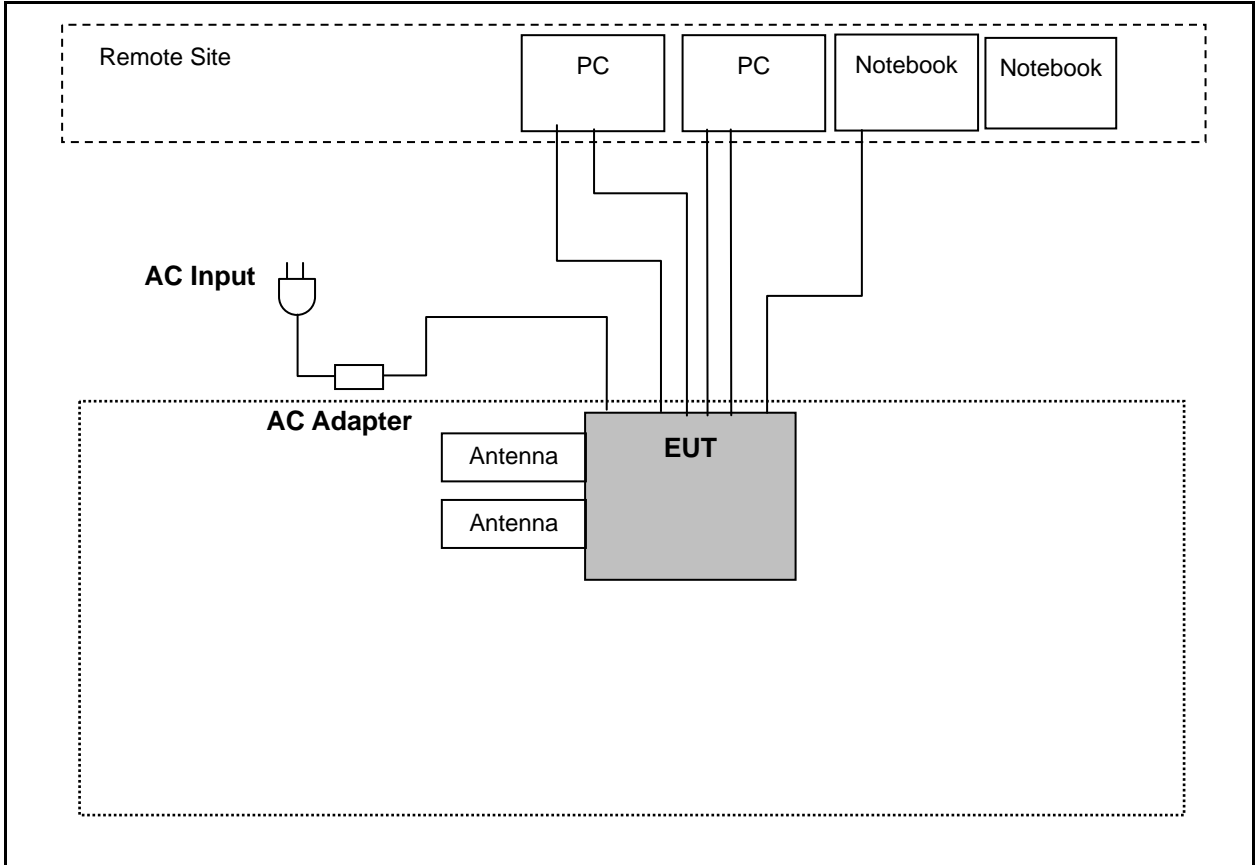

Radiated Emissions

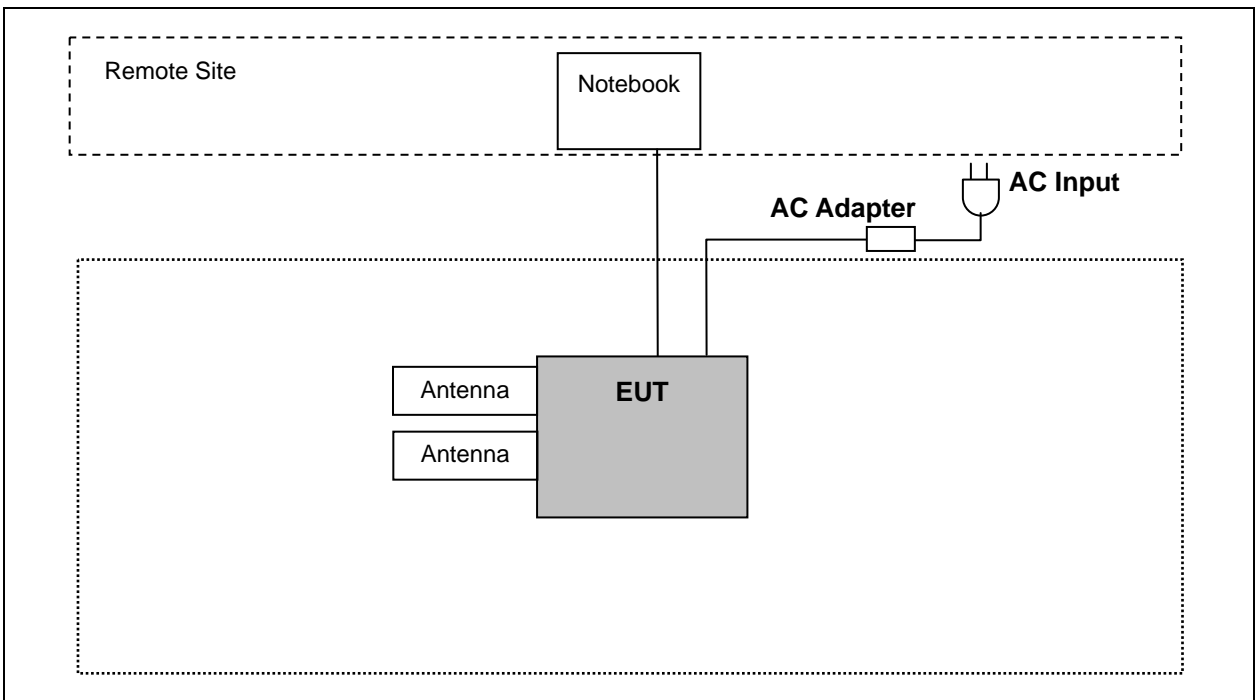

3.4. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950

4 Conducted Emission Measurement

4.1. Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50


4.2. Test Instruments

Describe	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Test Receiver	R&S	ESCI	100367	06/25/2015	(1)
LISN	R&S	ENV216	101040	03/10/2015	(1)
LISN	R&S	ENV216	101041	03/06/2015	(1)
RF Cable	Woken	00100D1380194M	TE-02-02	06/26/2015	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

4.3. Test Setup

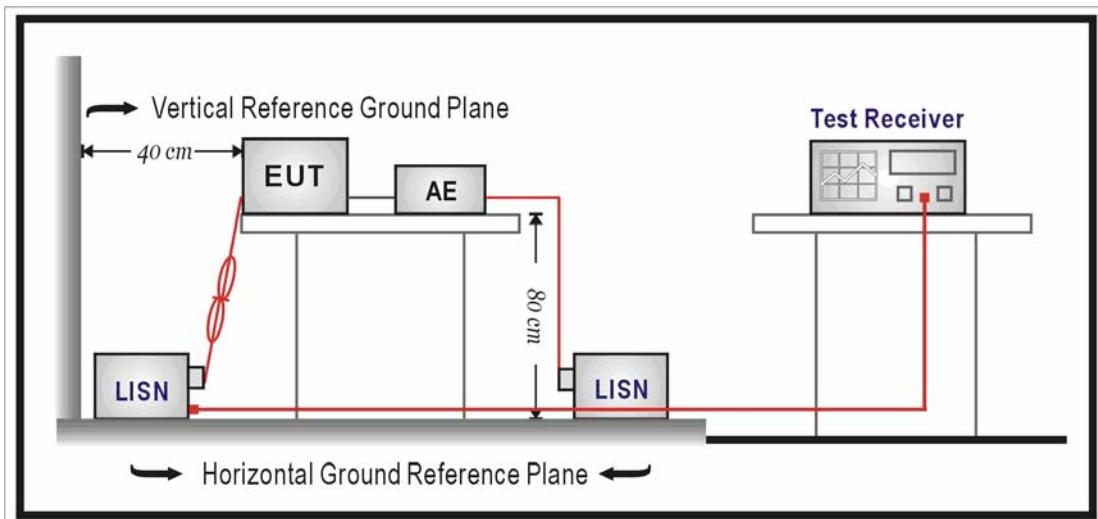

4.4. Test Procedure


The power line conducted emission measurements were performed in a shielded enclosure. The EUT was assembled on a wooden table which is 80 centimeters high, was placed 40 centimeters from the back wall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and EMCO Model 3162/2 SH Line Impedance Stabilization Networks (LISN). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.1.

4.5. Test Result

Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	TL-WR841HP	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 1	Date:	06/22/2015
		Test By:	Eric Ou Yang
Description:			

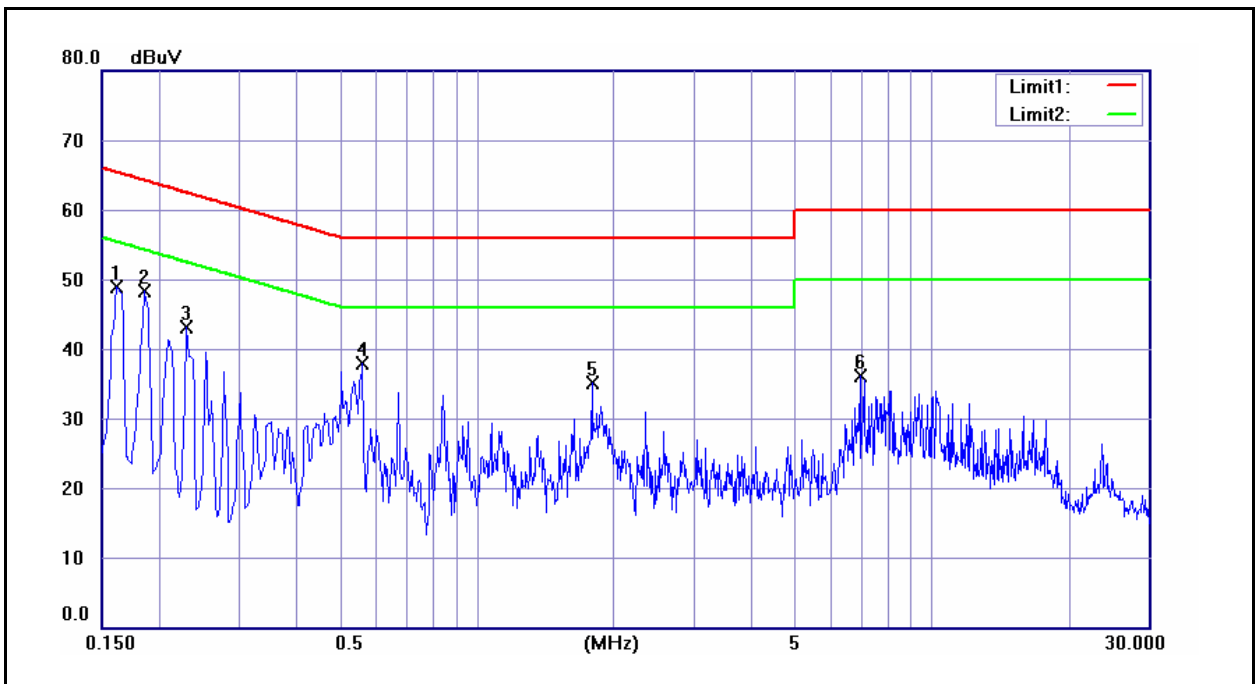


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1620	35.56	17.37	9.60	45.16	26.97	65.36	55.36	-20.20	-28.39	Pass
2	0.1860	31.14	15.60	9.60	40.74	25.20	64.21	54.21	-23.47	-29.01	Pass
3	0.2300	25.00	9.24	9.60	34.60	18.84	62.45	52.45	-27.85	-33.61	Pass
4	0.5620	24.60	11.72	9.62	34.22	21.34	56.00	46.00	-21.78	-24.66	Pass
5	1.7980	16.66	8.27	9.68	26.34	17.95	56.00	46.00	-29.66	-28.05	Pass
6	6.9820	13.08	4.69	9.85	22.93	14.54	60.00	50.00	-37.07	-35.46	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15C	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	TL-WR841HP	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 1	Date:	06/22/2015
		Test By:	Eric Ou Yang
Description:			

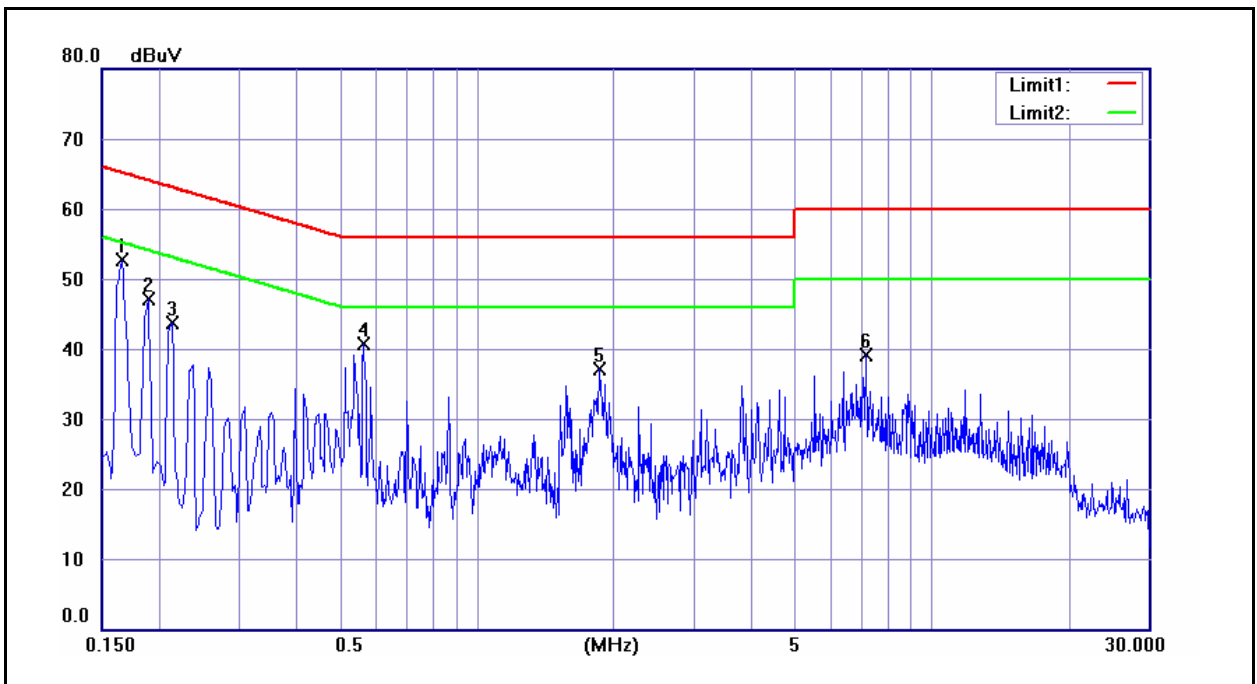

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1660	36.00	15.95	9.60	45.60	25.55	65.16	55.16	-19.56	-29.61	Pass
2	0.1900	31.82	13.17	9.60	41.42	22.77	64.04	54.04	-22.62	-31.27	Pass
3	0.2140	30.41	12.50	9.60	40.01	22.10	63.05	53.05	-23.04	-30.95	Pass
4	0.5660	23.92	7.37	9.62	33.54	16.99	56.00	46.00	-22.46	-29.01	Pass
5	1.8660	17.09	13.40	9.69	26.78	23.09	56.00	46.00	-29.22	-22.91	Pass
6	7.1940	17.07	9.05	9.88	26.95	18.93	60.00	50.00	-33.05	-31.07	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

5 Radiated Emission Measurement

5.1. Limit

According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$ at meter)	Measurement Distance (meters)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

5.2. Test Instruments


3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
RF Pre-selector	Agilent	N9039A	MY46520256	01/06/2015	(1)
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/06/2015	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/24/2015	(1)
Pre Amplifier	Agilent	8447D	2944A10961	02/24/2015	(1)
Broadband Antenna (30MHz~1GHz)	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	9163-270	08/11/2015	(1)
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/12/2015	(1)
Horn Antenna (18~40GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	07/06/2015	(1)
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	02/02/2015	(1)
Microwave Cable	EMCI	EMC-104-SM-S M-14000	140202	02/24/2015	(1)
Microwave Cable	EMCI	EMC104-SM-S M-600	140301	02/24/2015	(1)
Test Site	ATL	TE01	888001	08/28/2015	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.


Note: N.C.R. = No Calibration Request.

5.3. Setup


9kHz ~ 30MHz

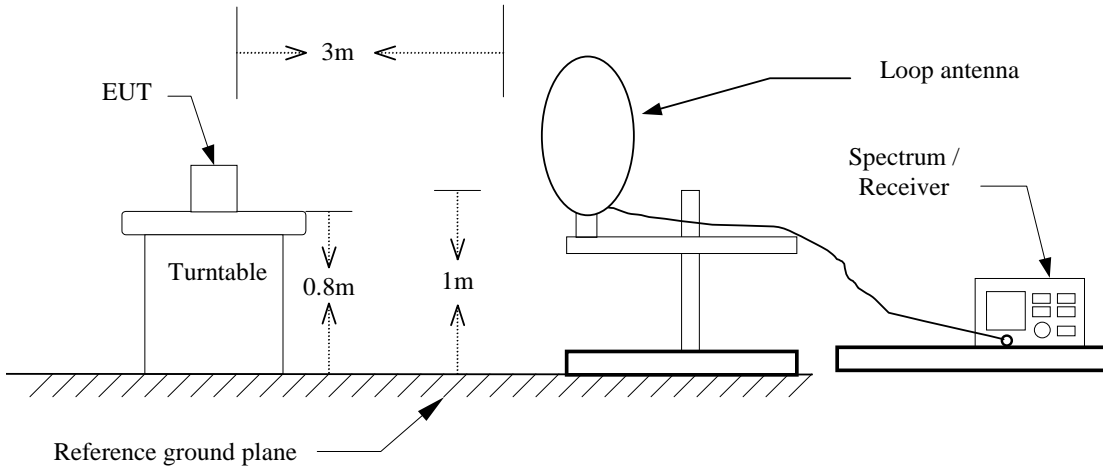

Below 1GHz

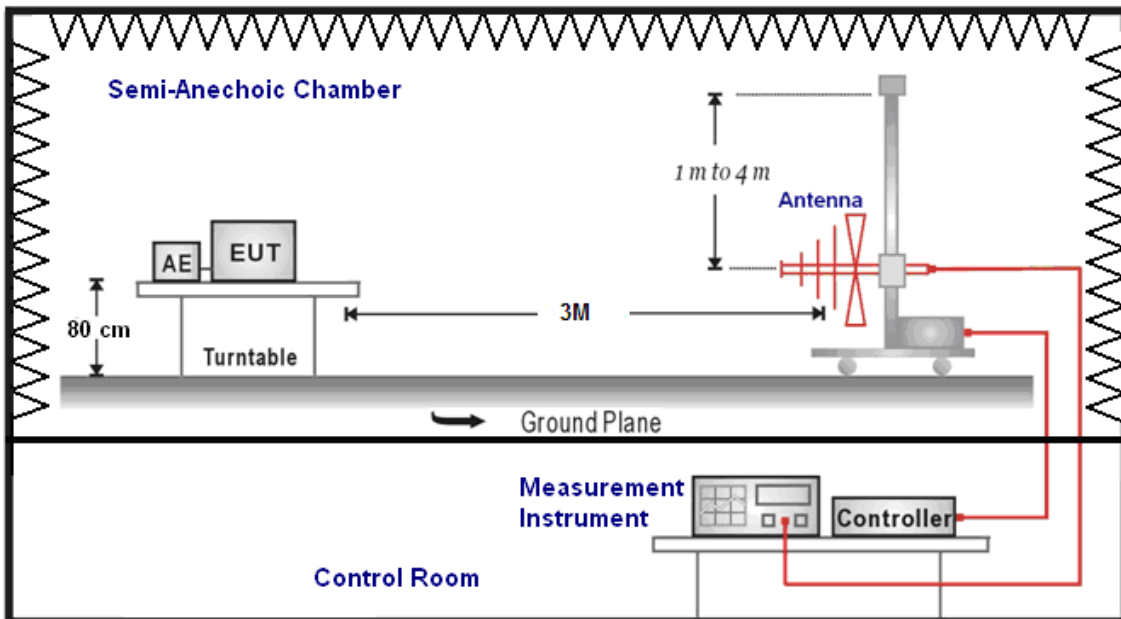

Above 1GHz

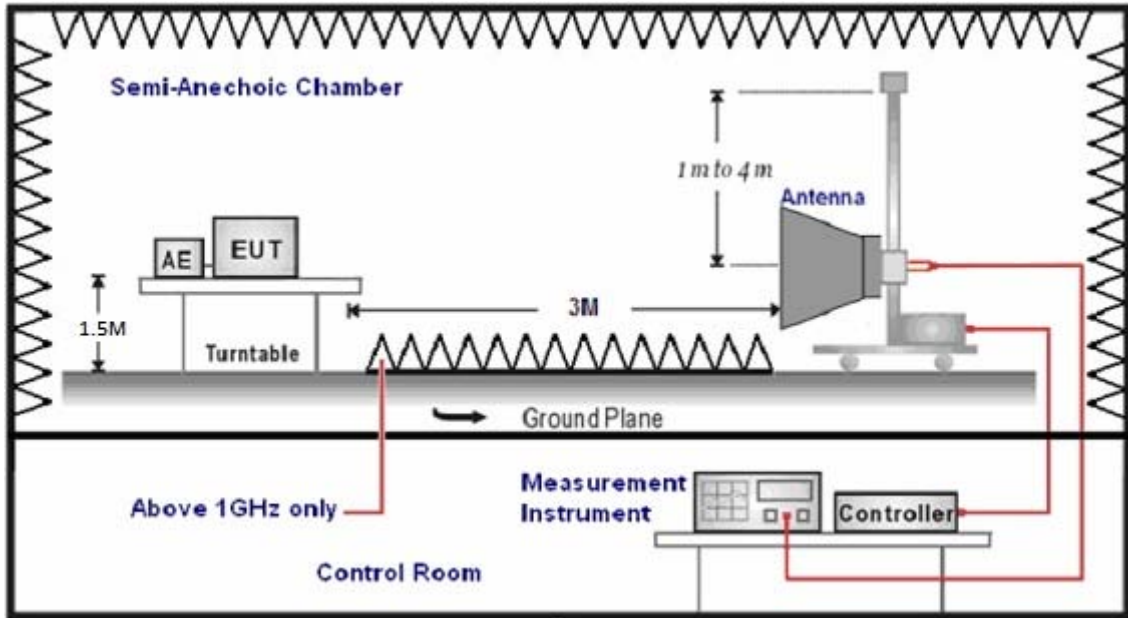

5.4. Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height (below 1GHz use 0.8m turntable / above 1GHz use 1.5m turntable), top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements when Duty cycle >0.98 / 1/T for average measurements when Duty cycle <0.98. A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna (mode VULB9163) at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna (model BBHA9120D&9170) was used in frequencies 1 – 26.5 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts pre meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

(1) $\text{Amplitude (dBuV/m)} = \text{FI (dBuV)} + \text{AF (dBuV)} + \text{CL (dBuV)} - \text{Gain (dB)}$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

(2) $\text{Actual Amplitude (dBuV/m)} = \text{Amplitude (dBuV)} - \text{Dis(dB)}$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

5.5. Test Result

Below 1GHz

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	TL-WR841HP	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 1	Date:	06/28/2015
		Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
290.0000	27.26	-9.68	17.58	46.00	-28.42	QP	H
443.5000	24.95	-6.44	18.51	46.00	-27.49	QP	H
557.0000	25.23	-4.30	20.93	46.00	-25.07	QP	H
630.0000	26.61	-2.78	23.83	46.00	-22.17	QP	H
721.0000	25.32	-0.96	24.36	46.00	-21.64	QP	H
900.0000	26.75	2.68	29.43	46.00	-16.57	QP	H
127.0000	38.80	-13.40	25.40	43.50	-18.10	QP	V
196.5000	36.32	-13.55	22.77	43.50	-20.73	QP	V
335.5000	31.73	-8.75	22.98	46.00	-23.02	QP	V
509.0000	27.15	-5.26	21.89	46.00	-24.11	QP	V
585.0000	26.45	-3.56	22.89	46.00	-23.11	QP	V
871.0000	26.94	1.88	28.82	46.00	-17.18	QP	V

Note: No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).

Above 1GHz

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	TL-WR841HP	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	08/14/2015
Frequency:	2412MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3058.000	38.35	1.97	40.32	74.00	-33.68	peak	H
4824.000	47.69	7.48	55.17	74.00	-18.83	peak	H
4824.000	44.50	7.48	51.98	54.00	-2.02	AVG	H
6656.000	34.38	11.93	46.31	74.00	-27.69	peak	H
3037.000	39.85	1.87	41.72	74.00	-32.28	peak	V
4824.000	49.90	7.48	57.38	74.00	-16.62	peak	V
4824.000	46.20	7.48	53.68	54.00	-0.32	AVG	V
6670.000	34.84	11.96	46.80	74.00	-27.20	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	TL-WR841HP	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	08/14/2015
Frequency:	2437MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3114.000	38.51	2.22	40.73	74.00	-33.27	peak	H
4874.000	48.00	7.63	55.63	74.00	-18.37	peak	H
4874.000	44.58	7.63	52.21	54.00	-1.79	AVG	H
6761.000	34.56	12.18	46.74	74.00	-27.26	peak	H
3114.000	39.43	2.22	41.65	74.00	-32.35	peak	V
4874.000	49.83	7.63	57.46	74.00	-16.54	peak	V
4874.000	45.96	7.63	53.59	54.00	-0.41	AVG	V
6789.000	34.54	12.25	46.79	74.00	-27.21	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	TL-WR841HP			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 2			Date:	08/14/2015		
Frequency:	2462MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2960.000	38.41	1.57	39.98	74.00	-34.02	peak	H
4924.000	47.29	7.79	55.08	74.00	-18.92	peak	H
4924.000	43.88	7.79	51.67	54.00	-2.33	AVG	H
6684.000	34.56	11.99	46.55	74.00	-27.45	peak	H
3100.000	38.85	2.16	41.01	74.00	-32.99	peak	V
4924.000	49.03	7.79	56.82	74.00	-17.18	peak	V
4924.000	45.65	7.79	53.44	54.00	-0.56	AVG	V
6740.000	34.73	12.13	46.86	74.00	-27.14	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	TL-WR841HP			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 3			Date:	08/14/2015		
Frequency:	2412MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3044.000	39.07	1.90	40.97	74.00	-33.03	peak	H
4549.000	35.55	6.61	42.16	74.00	-31.84	peak	H
6684.000	35.01	11.99	47.00	74.00	-27.00	peak	H
3107.000	38.39	2.19	40.58	74.00	-33.42	peak	V
4472.000	35.14	6.39	41.53	74.00	-32.47	peak	V
6740.000	34.05	12.13	46.18	74.00	-27.82	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	TL-WR841HP			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 3			Date:	08/14/2015		
Frequency:	2437MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3093.000	39.17	2.12	41.29	74.00	-32.71	peak	H
4874.000	49.43	7.63	57.06	74.00	-16.94	peak	H
4874.000	45.00	7.63	52.63	54.00	-1.37	AVG	H
6719.000	34.33	12.08	46.41	74.00	-27.59	peak	H
3030.000	39.02	1.85	40.87	74.00	-33.13	peak	V
4874.000	51.06	7.63	58.69	74.00	-15.31	peak	V
4874.000	45.94	7.63	53.57	54.00	-0.43	AVG	V
6719.000	35.22	12.08	47.30	74.00	-26.70	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	TL-WR841HP			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 3			Date:	08/14/2015		
Frequency:	2462MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2960.000	40.06	1.57	41.63	74.00	-32.37	peak	H
4591.000	35.09	6.74	41.83	74.00	-32.17	peak	H
6635.000	35.47	11.88	47.35	74.00	-26.65	peak	H
3107.000	39.26	2.19	41.45	74.00	-32.55	peak	V
4626.000	34.68	6.85	41.53	74.00	-32.47	peak	V
6719.000	34.58	12.08	46.66	74.00	-27.34	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	TL-WR841HP	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	08/14/2015
Frequency:	2412MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3163.000	38.08	2.44	40.52	74.00	-33.48	peak	H
4591.000	34.87	6.74	41.61	74.00	-32.39	peak	H
6768.000	34.31	12.20	46.51	74.00	-27.49	peak	H
3135.000	38.44	2.31	40.75	74.00	-33.25	peak	V
4521.000	34.97	6.52	41.49	74.00	-32.51	peak	V
6719.000	34.36	12.08	46.44	74.00	-27.56	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	TL-WR841HP	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	08/14/2015
Frequency:	2437MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3170.000	38.75	2.45	41.20	74.00	-32.80	peak	H
4874.000	49.39	7.63	57.02	74.00	-16.98	peak	H
4874.000	44.82	7.63	52.45	54.00	-1.55	AVG	H
6810.000	34.80	12.30	47.10	74.00	-26.90	peak	H
3051.000	38.36	1.94	40.30	74.00	-33.70	peak	V
4874.000	51.51	7.63	59.14	74.00	-14.86	peak	V
4874.000	45.93	7.63	53.56	54.00	-0.44	AVG	V
6691.000	35.51	12.02	47.53	74.00	-26.47	peak	V

Standard:	FCC Part 15C		Test Distance:	3m			
Test item:	Radiated Emission		Power:	AC 120V/60Hz			
Model Number:	TL-WR841HP		Temp.(°C)/Hum.(%RH):	26(°C)/60%RH			
Mode:	Mode 4		Date:	08/14/2015			
Frequency:	2462MHz		Test By:	Eric Ou Yang			
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3212.000	38.28	2.64	40.92	74.00	-33.08	peak	H
4654.000	34.50	6.94	41.44	74.00	-32.56	peak	H
6621.000	34.28	11.84	46.12	74.00	-27.88	peak	H
3100.000	39.28	2.16	41.44	74.00	-32.56	peak	V
4605.000	35.65	6.79	42.44	74.00	-31.56	peak	V
6600.000	35.41	11.80	47.21	74.00	-26.79	peak	V

Standard:	FCC Part 15C		Test Distance:	3m			
Test item:	Radiated Emission		Power:	AC 120V/60Hz			
Model Number:	TL-WR841HP		Temp.(°C)/Hum.(%RH):	26(°C)/60%RH			
Mode:	Mode 5		Date:	08/14/2015			
Frequency:	2422MHz		Test By:	Eric Ou Yang			
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3191.000	38.82	2.55	41.37	74.00	-32.63	peak	H
4605.000	34.66	6.79	41.45	74.00	-32.55	peak	H
6621.000	35.18	11.84	47.02	74.00	-26.98	peak	H
3107.000	38.76	2.19	40.95	74.00	-33.05	peak	V
4696.000	34.30	7.07	41.37	74.00	-32.63	peak	V
6677.000	36.72	11.97	48.69	74.00	-25.31	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	TL-WR841HP	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	08/14/2015
Frequency:	2437MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3100.000	38.97	2.16	41.13	74.00	-32.87	peak	H
4633.000	35.66	6.88	42.54	74.00	-31.46	peak	H
6691.000	34.74	12.02	46.76	74.00	-27.24	peak	H
3212.000	38.53	2.64	41.17	74.00	-32.83	peak	V
4528.000	35.66	6.55	42.21	74.00	-31.79	peak	V
6761.000	34.81	12.18	46.99	74.00	-27.01	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	TL-WR841HP	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	08/14/2015
Frequency:	2452MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3114.000	39.29	2.22	41.51	74.00	-32.49	peak	H
4836.000	34.68	7.51	42.19	74.00	-31.81	peak	H
6768.000	35.18	12.20	47.38	74.00	-26.62	peak	H
3177.000	38.27	2.49	40.76	74.00	-33.24	peak	V
4710.000	34.01	7.11	41.12	74.00	-32.88	peak	V
6691.000	34.92	12.02	46.94	74.00	-27.06	peak	V

6 Maximum Conducted Output Power Measurement


6.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for maximum output power is 30dBm.

Note: The EUT maximum gain is 9 dBi > 6 dBi.

Output power limit = $30 - (9 - 6) = 27\text{dBm}$.

6.2. Test Setup

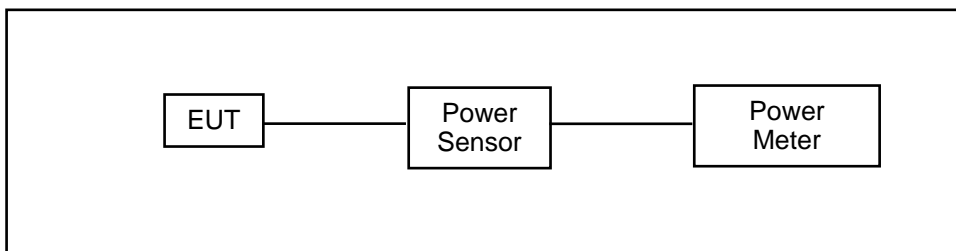

6.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Power Sensor	Anritsu	MA2411B	1126022	08/21/2014	(1)
Power Meter	Anritsu	ML2495A	1135009	08/21/2014	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

6.4. Test Procedure

The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor. The maximum output power shall not exceed 1 watt.

Use a direct connection between the antenna port of transmitter and the power sensor, for prevent the power sensor input attenuation 40-50 dB. Set the RBW Bandwidth of the emission or use a channel power meter mode.

For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt (+30 dBm). For antennas with gains greater than 6 dBi, transmitter output level must be decreased by an amount equal to $(\text{GAIN} - 6)/3$ dBm.

The antenna port of the EUT was connected to the input of a power sensor. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.

6.5. Test Result

Model Number	TL-WR841HP							
Test Item	Maximum Conducted Output Power							
Test Mode	Mode 2: IEEE 802.11b link mode							
Date of Test	06/22/2015						Test Site	TE05
Frequency (MHz)	Data Rate	Average Power						Limit (dBm)
		ANT-0		ANT-1		ANT-0+1		
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
2412	1M	19.90	0.098	20.27	0.106	23.10	0.204	< 27
2437		19.97	0.099	20.21	0.105	23.10	0.204	< 27
2462		19.76	0.095	19.72	0.094	22.75	0.188	< 27
2437	2M	19.95	0.099	20.19	0.104	23.08	0.203	< 27
2437	5.5M	19.94	0.099	20.18	0.104	23.07	0.203	< 27
2437	11M	19.93	0.098	20.16	0.104	23.06	0.202	< 27

Model Number	TL-WR841HP							
Test Item	Maximum Conducted Output Power							
Test Mode	Mode 3: IEEE 802.11g link mode							
Date of Test	06/22/2015						Test Site	TE05
Frequency (MHz)	Data Rate	Average Power						Limit (dBm)
		ANT-0		ANT-1		ANT-0+1		
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
2412	6M	15.83	0.038	16.46	0.044	19.17	0.083	< 27
2437		20.82	0.121	21.12	0.129	23.98	0.250	< 27
2462		17.01	0.050	16.91	0.049	19.97	0.099	< 27
2437	9M	20.80	0.120	21.11	0.129	23.97	0.249	< 27
2437	12M	20.79	0.120	21.09	0.129	23.95	0.248	< 27
2437	18M	20.77	0.119	21.08	0.128	23.94	0.248	< 27
2437	24M	20.74	0.119	21.06	0.128	23.91	0.246	< 27
2437	36M	20.73	0.118	21.05	0.127	23.90	0.246	< 27
2437	48M	20.71	0.118	21.02	0.126	23.88	0.244	< 27
2437	54M	20.70	0.117	20.01	0.100	23.38	0.218	< 27

Model Number	TL-WR841HP							
Test Item	Maximum Conducted Output Power							
Test Mode	Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode							
Date of Test	06/22/2015						Test Site	TE05
Frequency (MHz)	Data Rate	Average Power						Limit (dBm)
		ANT-0		ANT-1		ANT-0+1		
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
2412	13M	14.55	0.029	15.84	0.038	18.25	0.067	< 27
2437		20.74	0.119	21.06	0.128	23.91	0.246	< 27
2462		15.87	0.039	16.38	0.043	19.14	0.082	< 27
2437	26M	20.73	0.118	21.05	0.127	23.90	0.246	< 27
2437	39M	20.71	0.118	21.03	0.127	23.88	0.245	< 27
2437	52M	20.69	0.117	21.02	0.126	23.87	0.244	< 27
2437	78M	20.66	0.116	21.00	0.126	23.84	0.242	< 27
2437	104M	20.65	0.116	20.97	0.125	23.82	0.241	< 27
2437	117M	20.63	0.116	20.96	0.125	23.81	0.240	< 27
2437	130M	20.61	0.115	20.94	0.124	23.79	0.239	< 27


Model Number	TL-WR841HP							
Test Item	Maximum Conducted Output Power							
Test Mode	Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode							
Date of Test	06/22/2015						Test Site	TE05
Frequency (MHz)	Data Rate	Average Power						Limit (dBm)
		ANT-0		ANT-1		ANT-0+1		
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
2422	27M	9.69	0.009	11.09	0.013	13.46	0.022	< 27
2437		15.54	0.036	16.02	0.040	18.80	0.076	< 27
2452		9.84	0.010	10.86	0.012	13.39	0.022	< 27
2437	54M	15.53	0.036	15.99	0.040	18.78	0.075	< 27
2437	81M	15.52	0.036	15.98	0.040	18.77	0.075	< 27
2437	108M	15.50	0.035	15.96	0.039	18.75	0.075	< 27
2437	162M	15.47	0.035	15.93	0.039	18.72	0.074	< 27
2437	216M	15.46	0.035	15.92	0.039	18.71	0.074	< 27
2437	243M	15.44	0.035	15.91	0.039	18.69	0.074	< 27
2437	270M	15.41	0.035	15.89	0.039	18.67	0.074	< 27

7 6dB RF Bandwidth Measurement

7.1. Limit

6dB RF Bandwidth: Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

7.2. Test Setup

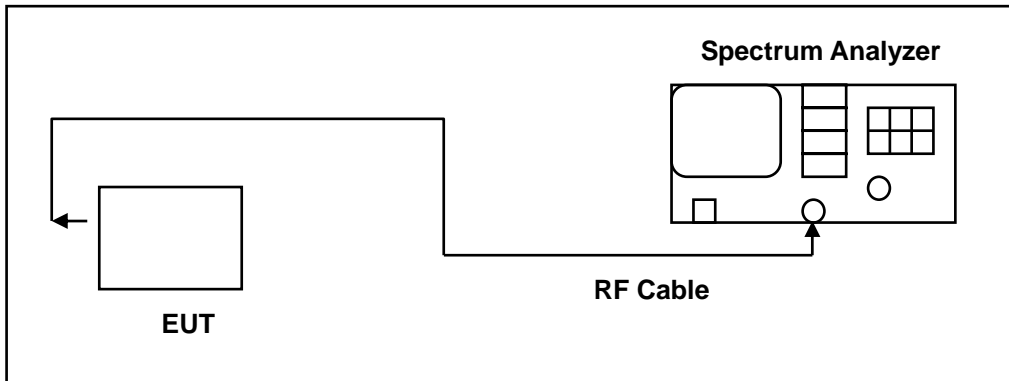

7.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/16/2014	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

dRemark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

7.4. Test Procedure

The EUT tested to DTS test procedure of KDB558074D01 for compliance to FCC 47CFR 15.247 requirements.

6dB RF Bandwidth: The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES RBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.

The test was performed at 3 channels (Channel low, middle, high)

99 % Occupied Bandwidth: The transmitter shall be operated at its maximum carrier power measured under normal test conditions.

The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual.

The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded.

7.5. Test Result

Model Number	TL-WR841HP			
Test Item	6dB RF Bandwidth			
Test Mode	Mode 2: IEEE 802.11b link mode Mode 3: IEEE 802.11g link mode Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode			
Date of Test	08/16/2015		Test Site	TE05
Test Mode	Frequency (MHz)	Measurement (kHz)		Limit (MHz)
		ANT-0	ANT-1	
Mode 2	2412	10160	10102	> 0.500
	2437	10078	10142	> 0.500
	2462	10081	10044	> 0.500
Mode 3	2412	16375	16381	> 0.500
	2437	16412	16412	> 0.500
	2462	16449	16387	> 0.500
Mode 4	2412	17579	17636	> 0.500
	2437	17563	17609	> 0.500
	2462	17622	17563	> 0.500
Mode 5	2422	36352	36382	> 0.500
	2437	36424	36419	> 0.500
	2452	36356	36448	> 0.500

7.6. Test Graphs

Mode 2: IEEE 802.11b link mode_ANT-0	
2412	<p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/Offset 10.9 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 13.8288 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 29.214 kHz</p> <p>x dB Bandwidth 10.160 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
2437	<p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/Offset 10.9 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 13.8420 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -31.901 kHz</p> <p>x dB Bandwidth 10.078 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
2462	<p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/Offset 10.9 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 13.9091 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 9.091 kHz</p> <p>x dB Bandwidth 10.081 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>

Mode 3: IEEE 802.11g link mode_ANT-0

<p>2412</p>	
<p>2437</p>	
<p>2462</p>	

Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode_ANT-0

<p>2412</p>	<p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/Offset 10.9 dB</p> <p>Center 2.412 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Occ BW % Pwr</td> <td>99.00 %</td> </tr> <tr> <td>17.6334 MHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>Transmit Freq Error</td> <td>-6.954 kHz</td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>17.579 MHz</td> <td></td> </tr> </table> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>	Occupied Bandwidth	Occ BW % Pwr	99.00 %	17.6334 MHz	x dB	-6.00 dB	Transmit Freq Error	-6.954 kHz		x dB Bandwidth	17.579 MHz	
Occupied Bandwidth	Occ BW % Pwr	99.00 %											
17.6334 MHz	x dB	-6.00 dB											
Transmit Freq Error	-6.954 kHz												
x dB Bandwidth	17.579 MHz												
<p>2437</p>	<p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/Offset 10.9 dB</p> <p>Center 2.437 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Occ BW % Pwr</td> <td>99.00 %</td> </tr> <tr> <td>17.6436 MHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>Transmit Freq Error</td> <td>-4.345 kHz</td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>17.563 MHz</td> <td></td> </tr> </table> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>	Occupied Bandwidth	Occ BW % Pwr	99.00 %	17.6436 MHz	x dB	-6.00 dB	Transmit Freq Error	-4.345 kHz		x dB Bandwidth	17.563 MHz	
Occupied Bandwidth	Occ BW % Pwr	99.00 %											
17.6436 MHz	x dB	-6.00 dB											
Transmit Freq Error	-4.345 kHz												
x dB Bandwidth	17.563 MHz												
<p>2462</p>	<p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/Offset 10.9 dB</p> <p>Center 2.462 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Occ BW % Pwr</td> <td>99.00 %</td> </tr> <tr> <td>17.6678 MHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>Transmit Freq Error</td> <td>-12.421 kHz</td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>17.622 MHz</td> <td></td> </tr> </table> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>	Occupied Bandwidth	Occ BW % Pwr	99.00 %	17.6678 MHz	x dB	-6.00 dB	Transmit Freq Error	-12.421 kHz		x dB Bandwidth	17.622 MHz	
Occupied Bandwidth	Occ BW % Pwr	99.00 %											
17.6678 MHz	x dB	-6.00 dB											
Transmit Freq Error	-12.421 kHz												
x dB Bandwidth	17.622 MHz												

Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode_ANT-0

<p>2422</p>	<p>Agilent R T</p> <p>Ch Freq 2.422 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/Offset 10.9 dB</p> <p>Center 2.422 GHz Span 50 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 5.18 ms (401 pts)</p> <p>Occupied Bandwidth 36.1875 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 8.249 kHz x dB Bandwidth 36.352 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.42200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.44700000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
<p>2437</p>	<p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/Offset 10.9 dB</p> <p>Center 2.437 GHz Span 50 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 5.18 ms (401 pts)</p> <p>Occupied Bandwidth 36.1856 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -1.980 kHz x dB Bandwidth 36.424 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.41200000 GHz</p> <p>Stop Freq 2.46200000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
<p>2452</p>	<p>Agilent R T</p> <p>Ch Freq 2.452 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/Offset 10.9 dB</p> <p>Center 2.452 GHz Span 50 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 5.18 ms (401 pts)</p> <p>Occupied Bandwidth 36.1765 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -3.493 kHz x dB Bandwidth 36.356 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.45200000 GHz</p> <p>Start Freq 2.42700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>

Mode 2: IEEE 802.11b link mode_ANT-1

<p>2412</p>	<p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/ Offset 10.9 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 13.9175 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -12.484 kHz x dB Bandwidth 10.102 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
<p>2437</p>	<p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/ Offset 10.9 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 13.8728 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -8.127 kHz x dB Bandwidth 10.142 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
<p>2462</p>	<p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/ Offset 10.9 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 13.8707 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -9.224 kHz x dB Bandwidth 10.044 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>

Mode 3: IEEE 802.11g link mode_ANT-1

<p>2412</p>	<p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/Offset 10.9 dB</p> <p>Center 2.412 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 16.4589 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -10.220 kHz x dB Bandwidth 16.381 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
<p>2437</p>	<p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/Offset 10.9 dB</p> <p>Center 2.437 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 16.4449 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -23.651 kHz x dB Bandwidth 16.412 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
<p>2462</p>	<p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/Offset 10.9 dB</p> <p>Center 2.462 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 16.4637 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -22.662 kHz x dB Bandwidth 16.387 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>

Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode_ANT-1

<p>2412</p>	<p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/Offset 10.9 dB</p> <p>Center 2.412 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 17.6403 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -4.503 kHz x dB Bandwidth 17.636 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
<p>2437</p>	<p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/Offset 10.9 dB</p> <p>Center 2.437 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 17.6869 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -10.773 kHz x dB Bandwidth 17.609 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
<p>2462</p>	<p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/Offset 10.9 dB</p> <p>Center 2.462 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 17.6463 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -20.677 kHz x dB Bandwidth 17.563 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>

Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode_ANT-1

<p>2422</p>	<p>Agilent R T</p> <p>Ch Freq 2.422 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/Offset 10.9 dB</p> <p>Center 2.422 GHz Span 50 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 5.18 ms (401 pts)</p> <p>Occupied Bandwidth 36.2138 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -14.343 kHz</p> <p>x dB Bandwidth 36.382 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.42200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.44700000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
<p>2437</p>	<p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/Offset 10.9 dB</p> <p>Center 2.437 GHz Span 50 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 5.18 ms (401 pts)</p> <p>Occupied Bandwidth 36.2212 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -17.064 kHz</p> <p>x dB Bandwidth 36.419 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.41200000 GHz</p> <p>Stop Freq 2.46200000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
<p>2452</p>	<p>Agilent R T</p> <p>Ch Freq 2.452 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/Offset 10.9 dB</p> <p>Center 2.452 GHz Span 50 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 5.18 ms (401 pts)</p> <p>Occupied Bandwidth 36.2189 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 1.277 kHz</p> <p>x dB Bandwidth 36.448 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.45200000 GHz</p> <p>Start Freq 2.42700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>

8 Maximum Power Density Measurement


8.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Note: The EUT maximum gain is 9 dBi > 6 dBi.

Output power limit = $8 - (9 - 6) = 5$ dBm/3KHz.

8.2. Test Setup

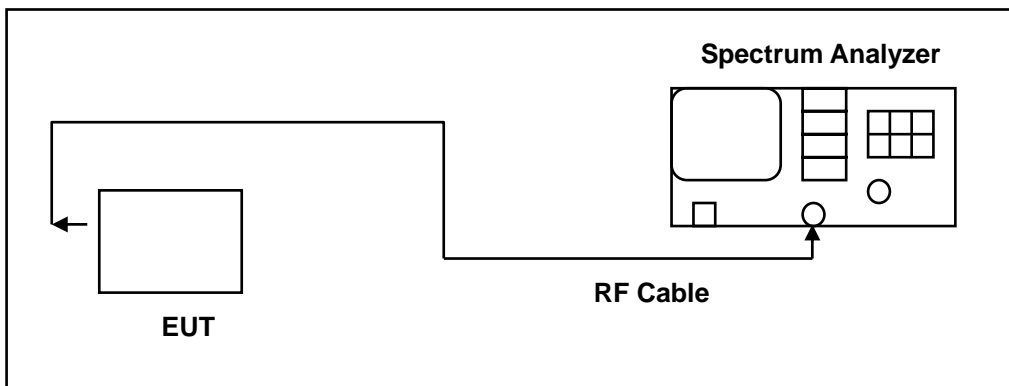

8.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/16/2014	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

8.4. Test Procedure

The EUT tested to DTS test procedure of KDB558074D01 for compliance to FCC 47CFR 15.247 requirements.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

8.5. Test Result

Model Number	TL-WR841HP				
Test Item	Maximum Power Density				
Test Mode	Mode 2: IEEE 802.11b link mode Mode 3: IEEE 802.11g link mode Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode				
Date of Test	08/16/2015			Test Site	TE05
Test Mode	Frequency (MHz)	Measurement (dBm/3KHz)			Limit (dBm/3KHz)
		ANT-0	ANT-1	ANT-0+1	
Mode 2	2412	-1.784	-3.081	0.626	< 5
	2437	-1.704	-3.054	0.684	< 5
	2462	-2.234	-2.926	0.444	< 5
Mode 3	2412	-11.830	-11.710	-8.759	< 5
	2437	-3.164	-3.215	-0.179	< 5
	2462	-9.783	-10.300	-7.024	< 5
Mode 4	2412	-9.916	-10.890	-7.365	< 5
	2437	-2.815	-2.484	0.364	< 5
	2462	-9.430	-9.597	-6.502	< 5
Mode 5	2422	-18.210	-18.190	-15.190	< 5
	2437	-13.550	-12.720	-10.105	< 5
	2452	-18.940	-16.310	-14.419	< 5




8.6. Test Graphs

Mode 2: IEEE 802.11b link mode_ANT-0	
2412	<p>Agilent R T Ref 10 dBm Atten 10 dB Mkr1 2.41100 GHz Peak Log 10 dB/Offset 10.9 dB Center 2.412 GHz Span 16 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 1.83 s (401 pts)</p>
2437	<p>Agilent R T Ref 10 dBm Atten 10 dB Mkr1 2.43800 GHz Peak Log 10 dB/Offset 10.9 dB Center 2.437 GHz Span 16 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 1.83 s (401 pts)</p>
2462	<p>Agilent R T Ref 10 dBm Atten 10 dB Mkr1 2.46100 GHz Peak Log 10 dB/Offset 10.9 dB Center 2.462 GHz Span 16 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 1.83 s (401 pts)</p>

Mode 3: IEEE 802.11g link mode_ANT-0

2412	
2437	
2462	

Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode_ANT-0
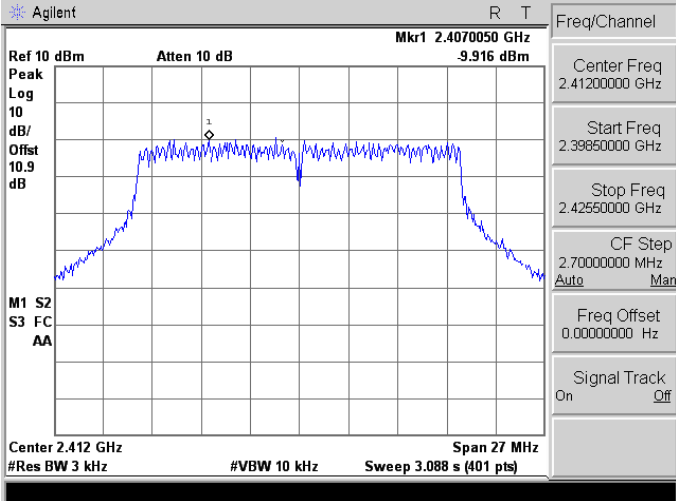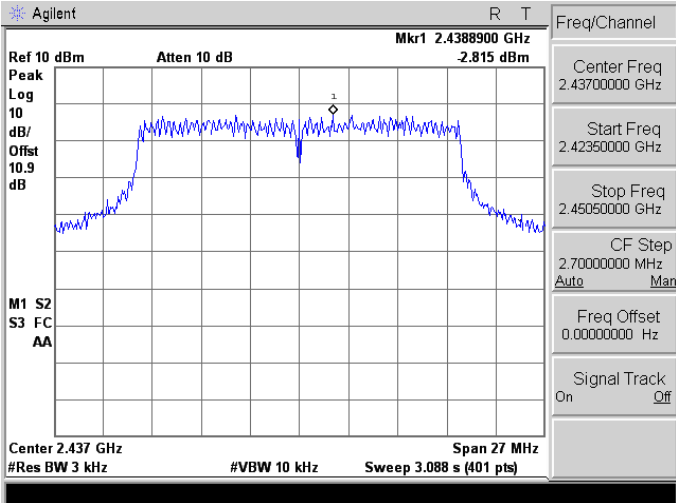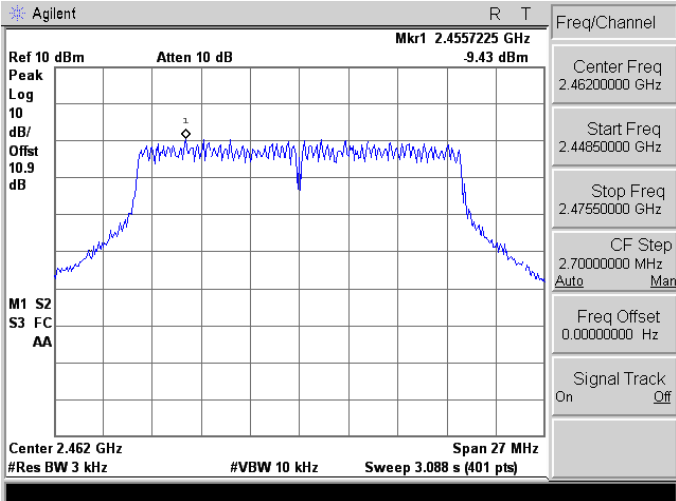
<p>2412</p>	 <p>Agilent R T</p> <p>Center Freq 2.4120000 GHz</p> <p>Start Freq 2.39850000 GHz</p> <p>Stop Freq 2.42550000 GHz</p> <p>CF Step 2.70000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Center 2.412 GHz Span 27 MHz</p> <p>#Res BW 3 kHz #VBW 10 kHz Sweep 3.088 s (401 pts)</p>
<p>2437</p>	 <p>Agilent R T</p> <p>Center Freq 2.4370000 GHz</p> <p>Start Freq 2.42350000 GHz</p> <p>Stop Freq 2.45050000 GHz</p> <p>CF Step 2.70000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Center 2.437 GHz Span 27 MHz</p> <p>#Res BW 3 kHz #VBW 10 kHz Sweep 3.088 s (401 pts)</p>
<p>2462</p>	 <p>Agilent R T</p> <p>Center Freq 2.4620000 GHz</p> <p>Start Freq 2.44850000 GHz</p> <p>Stop Freq 2.47550000 GHz</p> <p>CF Step 2.70000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Center 2.462 GHz Span 27 MHz</p> <p>#Res BW 3 kHz #VBW 10 kHz Sweep 3.088 s (401 pts)</p>

Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode_ANT-0

<p>2422</p>	<p>Agilent R T</p> <p>Ref 10 dBm Atten 10 dB Mkr1 2.43383 GHz -18.21 dBm</p> <p>Peak Log 10 dB/Offset 10.9 dB</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.422 GHz Span 55 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 6.29 s (401 pts)</p> <p>Freq/Channel</p> <p>Center Freq 2.42200000 GHz</p> <p>Start Freq 2.39450000 GHz</p> <p>Stop Freq 2.44950000 GHz</p> <p>CF Step 5.50000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
<p>2437</p>	<p>Agilent R T</p> <p>Ref 10 dBm Atten 10 dB Mkr1 2.42256 GHz -13.55 dBm</p> <p>Peak Log 10 dB/Offset 10.9 dB</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.437 GHz Span 55 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 6.29 s (401 pts)</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.40950000 GHz</p> <p>Stop Freq 2.46450000 GHz</p> <p>CF Step 5.50000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
<p>2452</p>	<p>Agilent R T</p> <p>Ref 10 dBm Atten 10 dB Mkr1 2.46823 GHz -18.94 dBm</p> <p>Peak Log 10 dB/Offset 10.9 dB</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.452 GHz Span 55 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 6.29 s (401 pts)</p> <p>Freq/Channel</p> <p>Center Freq 2.45200000 GHz</p> <p>Start Freq 2.42450000 GHz</p> <p>Stop Freq 2.47950000 GHz</p> <p>CF Step 5.50000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>




Mode 2: IEEE 802.11b link mode_ANT-1

2412	
2437	
2462	




Mode 3: IEEE 802.11g link mode_ANT-1

2412	
2437	
2462	

Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode_ANT-1
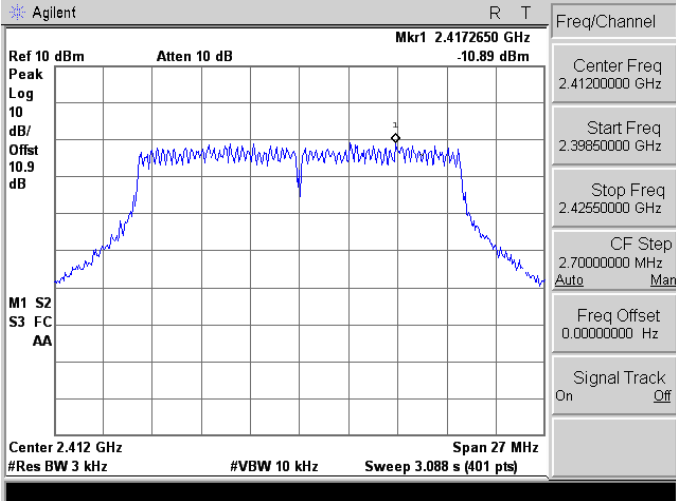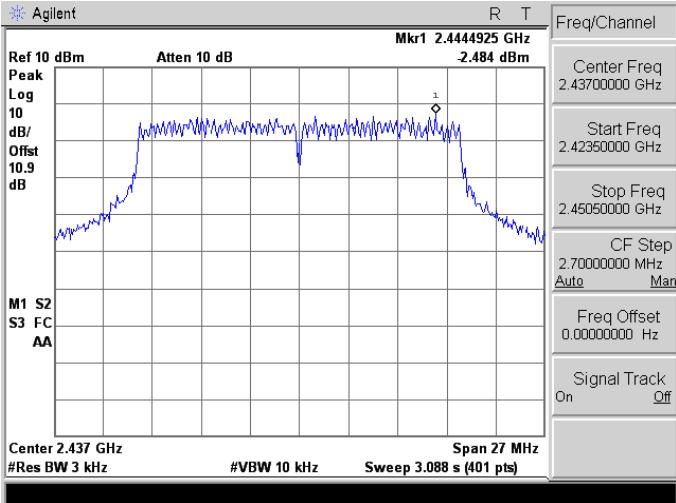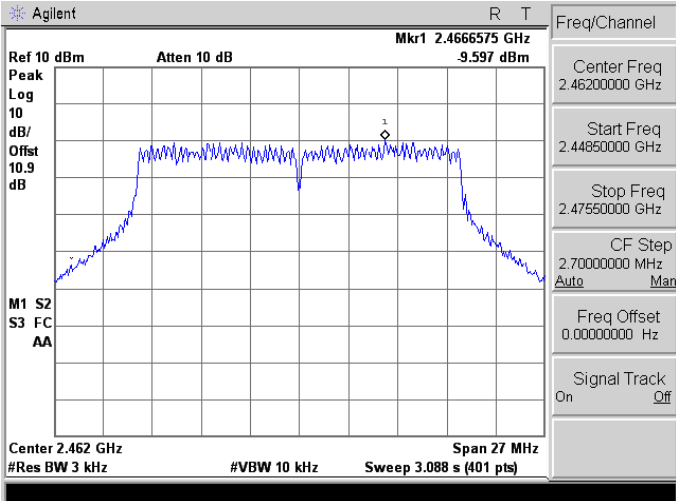
<p>2412</p>	 <p>Agilent R T</p> <p>Center Freq: 2.4120000 GHz</p> <p>Start Freq: 2.39850000 GHz</p> <p>Stop Freq: 2.42550000 GHz</p> <p>CF Step: 2.70000000 MHz</p> <p>Freq Offset: 0.00000000 Hz</p> <p>Signal Track: On</p> <p>Center 2.412 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 3.088 s (401 pts) Span 27 MHz</p>
<p>2437</p>	 <p>Agilent R T</p> <p>Center Freq: 2.4370000 GHz</p> <p>Start Freq: 2.42350000 GHz</p> <p>Stop Freq: 2.45050000 GHz</p> <p>CF Step: 2.70000000 MHz</p> <p>Freq Offset: 0.00000000 Hz</p> <p>Signal Track: On</p> <p>Center 2.437 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 3.088 s (401 pts) Span 27 MHz</p>
<p>2462</p>	 <p>Agilent R T</p> <p>Center Freq: 2.4620000 GHz</p> <p>Start Freq: 2.44850000 GHz</p> <p>Stop Freq: 2.47550000 GHz</p> <p>CF Step: 2.70000000 MHz</p> <p>Freq Offset: 0.00000000 Hz</p> <p>Signal Track: On</p> <p>Center 2.462 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 3.088 s (401 pts) Span 27 MHz</p>

Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode_ANT-1

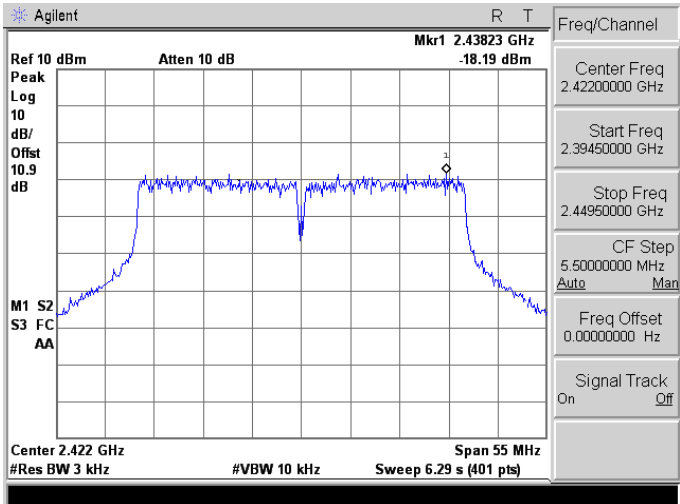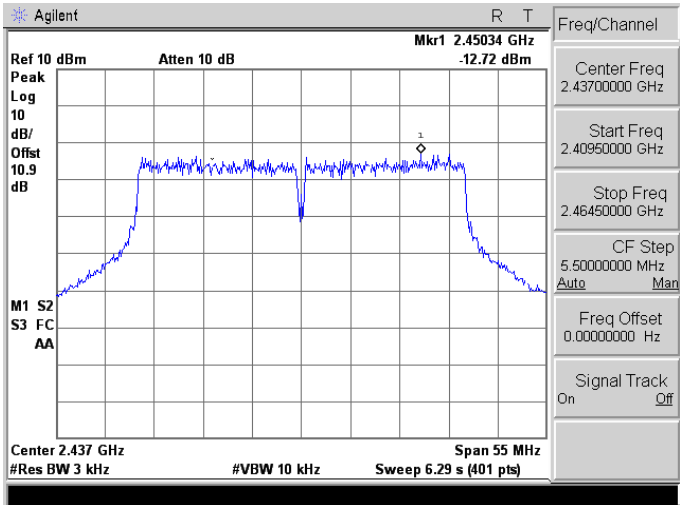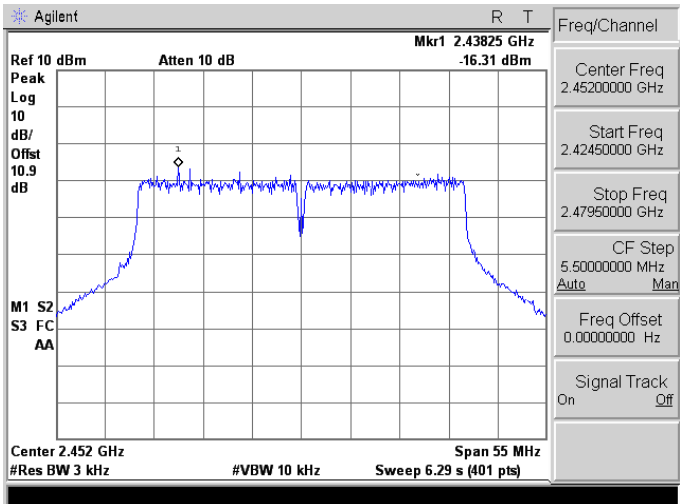
<p>2422</p>	
<p>2437</p>	
<p>2452</p>	

9 Out of Band Conducted Emissions Measurement

9.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

9.2. Test Setup

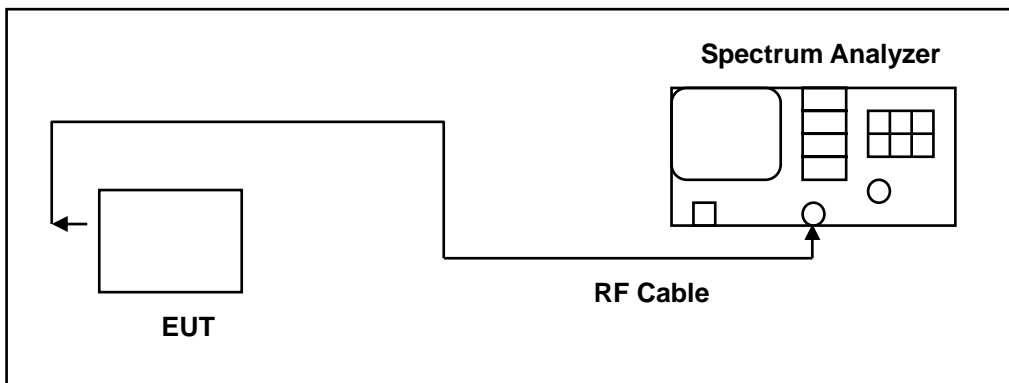

9.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/16/2014	(1)
Spectrum Analyzer	Agilent	E4408B	MY45107753	07/27/2015	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

9.4. Test Procedure

In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 30 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band.

The test was performed at 3 channels.

9.5. Test Graphs

Reference level

Mode 2: IEEE 802.11b link mode_ANT-0	
2412	
2437	
2462	

Mode 3: IEEE 802.11g link mode_ANT-0

<p>2412</p>	
<p>2437</p>	
<p>2462</p>	

Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode_ANT-0

<p>2412</p>	
<p>2437</p>	
<p>2462</p>	

Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode_ANT-0

<p>2422</p>	
<p>2437</p>	
<p>2452</p>	

Mode 2: IEEE 802.11b link mode_ANT-1

2412	<p>Agilent R T</p> <p>Ref 15 dBm Atten 15 dB Mkr1 2.41048 GHz 11.05 dBm</p> <p>Peak Log 10 dB/Offset 10.9 dB</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.412 GHz Span 16 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.40400000 GHz</p> <p>Stop Freq 2.42000000 GHz</p> <p>CF Step 1.60000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
2437	<p>Agilent R T</p> <p>Ref 15 dBm Atten 15 dB Mkr1 2.43800 GHz 10.66 dBm</p> <p>Peak Log 10 dB/Offset 10.9 dB</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.437 GHz Span 16 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42900000 GHz</p> <p>Stop Freq 2.44500000 GHz</p> <p>CF Step 1.60000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
2462	<p>Agilent R T</p> <p>Ref 15 dBm Atten 15 dB Mkr1 2.46100 GHz 11.28 dBm</p> <p>Peak Log 10 dB/Offset 10.9 dB</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.462 GHz Span 16 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.45400000 GHz</p> <p>Stop Freq 2.47000000 GHz</p> <p>CF Step 1.60000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>

Mode 3: IEEE 802.11g link mode_ANT-1

<p>2412</p>	
<p>2437</p>	
<p>2462</p>	

Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode_ANT-1

<p>2412</p>	<p>Agilent R T</p> <p>Ref 15 dBm Atten 15 dB Mkr1 2.4169950 GHz 3.597 dBm</p> <p>Peak Log 10 dB/Offset 10.9 dB</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.412 GHz Span 27 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39850000 GHz</p> <p>Stop Freq 2.42550000 GHz</p> <p>CF Step 2.70000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
<p>2437</p>	<p>Agilent R T</p> <p>Ref 15 dBm Atten 15 dB Mkr1 2.4320050 GHz 11.06 dBm</p> <p>Peak Log 10 dB/Offset 10.9 dB</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.437 GHz Span 27 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42350000 GHz</p> <p>Stop Freq 2.45050000 GHz</p> <p>CF Step 2.70000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
<p>2462</p>	<p>Agilent R T</p> <p>Ref 15 dBm Atten 15 dB Mkr1 2.4644975 GHz 4.708 dBm</p> <p>Peak Log 10 dB/Offset 10.9 dB</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.462 GHz Span 27 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44850000 GHz</p> <p>Stop Freq 2.47550000 GHz</p> <p>CF Step 2.70000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>

Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode_ANT-1

<p>2422</p>	
<p>2437</p>	
<p>2452</p>	


Out of Band Conducted Emissions

Mode 2: IEEE 802.11b link mode_ANT-0


<p>2412</p>	<p>Agilent R T</p> <p>Ref 15 dBm Atten 15 dB Mkr1 2.41 GHz 10.58 dBm</p> <p>Peak Log 10 dB/Offst 10.9 dB DI -18.2 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.5 GHz Sweep 2.742 s (401 pts)</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.41 GHz</td> <td>10.58 dBm</td> </tr> </tbody> </table> <p>Freq/Channel: Center Freq 13.2650000 GHz, Start Freq 30.0000000 MHz, Stop Freq 26.5000000 GHz, CF Step 2.64700000 GHz, Freq Offset 0.0000000 Hz, Signal Track On Off</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.41 GHz	10.58 dBm
Marker	Trace	Type	X Axis	Amplitude							
1	(1)	Freq	2.41 GHz	10.58 dBm							
<p>2437</p>	<p>Agilent R T</p> <p>Ref 15 dBm Atten 15 dB Mkr1 2.44 GHz 10.48 dBm</p> <p>Peak Log 10 dB/Offst 10.9 dB DI -18.4 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.5 GHz Sweep 2.742 s (401 pts)</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.44 GHz</td> <td>10.48 dBm</td> </tr> </tbody> </table> <p>Freq/Channel: Center Freq 13.2650000 GHz, Start Freq 30.0000000 MHz, Stop Freq 26.5000000 GHz, CF Step 2.64700000 GHz, Freq Offset 0.0000000 Hz, Signal Track On Off</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.44 GHz	10.48 dBm
Marker	Trace	Type	X Axis	Amplitude							
1	(1)	Freq	2.44 GHz	10.48 dBm							
<p>2462</p>	<p>Agilent R T</p> <p>Ref 15 dBm Atten 15 dB Mkr1 2.46 GHz 10.57 dBm</p> <p>Peak Log 10 dB/Offst 10.9 dB DI -18.4 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.5 GHz Sweep 2.742 s (401 pts)</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.46 GHz</td> <td>10.57 dBm</td> </tr> </tbody> </table> <p>Freq/Channel: Center Freq 13.2650000 GHz, Start Freq 30.0000000 MHz, Stop Freq 26.5000000 GHz, CF Step 2.64700000 GHz, Freq Offset 0.0000000 Hz, Signal Track On Off</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.46 GHz	10.57 dBm
Marker	Trace	Type	X Axis	Amplitude							
1	(1)	Freq	2.46 GHz	10.57 dBm							

Mode 3: IEEE 802.11g link mode_ANT-0


2412

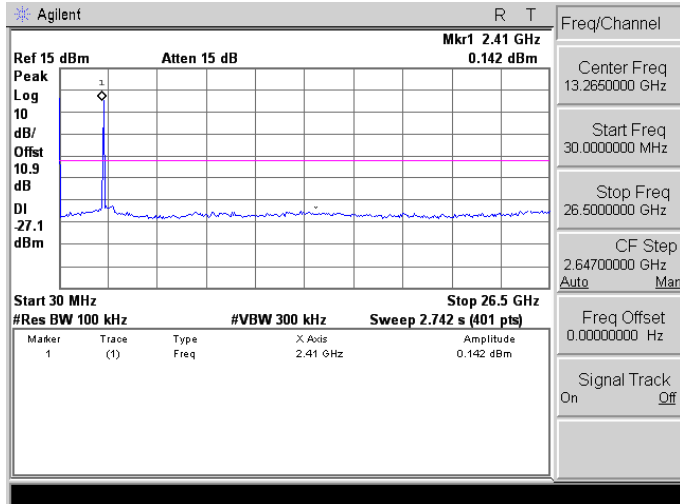

2437

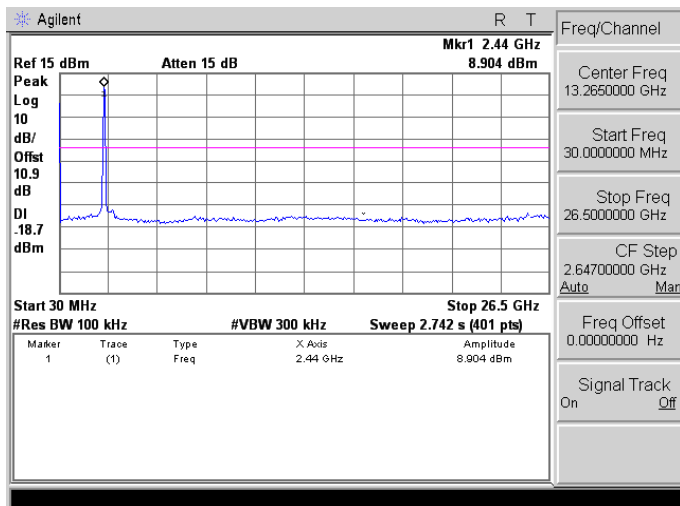


2462

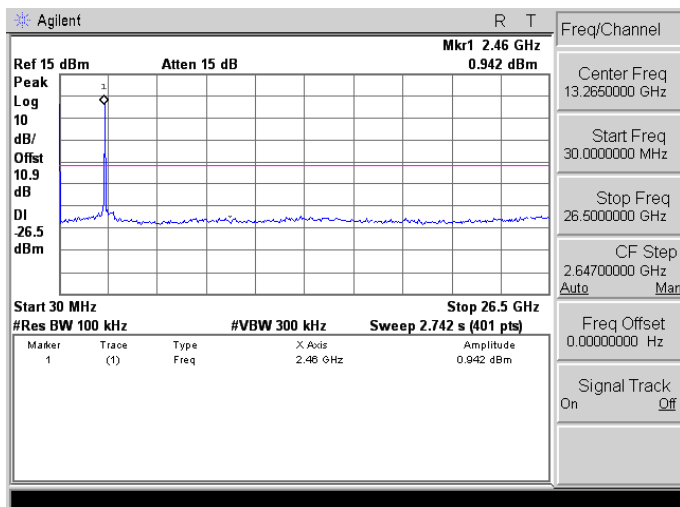


Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode_ANT-0


2412

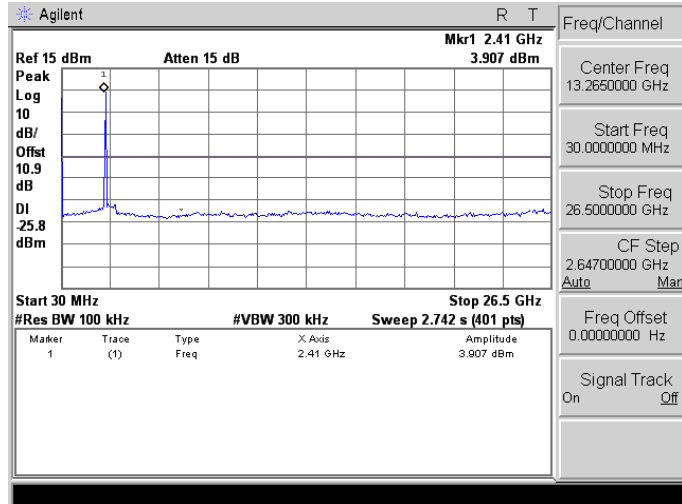

2437

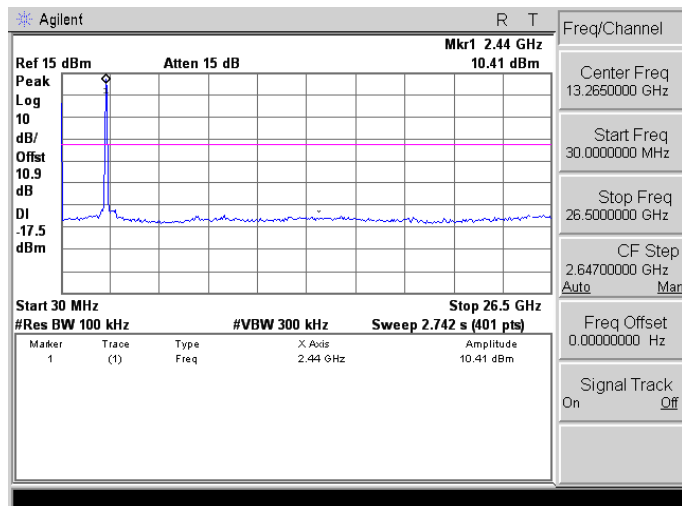

2462

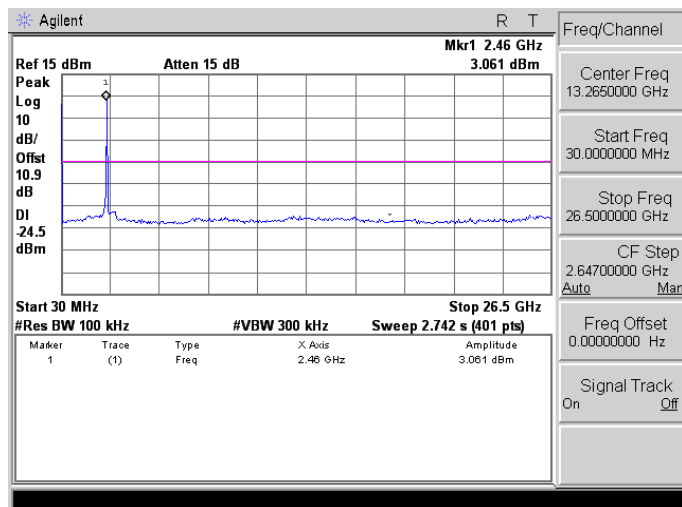


Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode_ANT-0


2422	<p>Agilent R T Ref 15 dBm Atten 15 dB Mkr1 2.42 GHz 5.779 dBm Peak Log 10 dB/ Offset 10.9 dB DI 32.9 dBm Start 30 MHz Stop 26.5 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.742 s (401 pts) <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.42 GHz</td> <td>-5.779 dBm</td> </tr> </tbody> </table> </p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.42 GHz	-5.779 dBm
Marker	Trace	Type	X Axis	Amplitude							
1	(1)	Freq	2.42 GHz	-5.779 dBm							
2437	<p>Agilent R T Ref 15 dBm Atten 15 dB Mkr1 2.44 GHz -0.634 dBm Peak Log 10 dB/ Offset 10.9 dB DI 28.2 dBm Start 30 MHz Stop 26.5 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.742 s (401 pts) <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.44 GHz</td> <td>-0.634 dBm</td> </tr> </tbody> </table> </p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.44 GHz	-0.634 dBm
Marker	Trace	Type	X Axis	Amplitude							
1	(1)	Freq	2.44 GHz	-0.634 dBm							
2452	<p>Agilent R T Ref 15 dBm Atten 15 dB Mkr1 2.45 GHz 5.513 dBm Peak Log 10 dB/ Offset 10.9 dB DI 33.3 dBm Start 30 MHz Stop 26.5 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.742 s (401 pts) <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.45 GHz</td> <td>-5.513 dBm</td> </tr> </tbody> </table> </p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.45 GHz	-5.513 dBm
Marker	Trace	Type	X Axis	Amplitude							
1	(1)	Freq	2.45 GHz	-5.513 dBm							

Mode 2: IEEE 802.11b link mode_ANT-1


2412

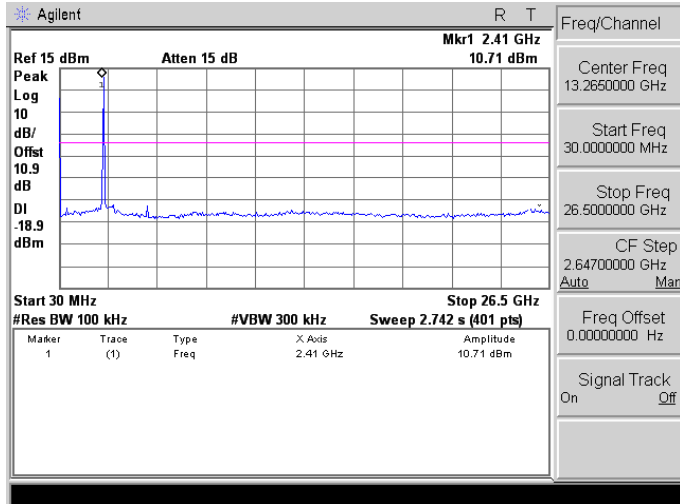

2437

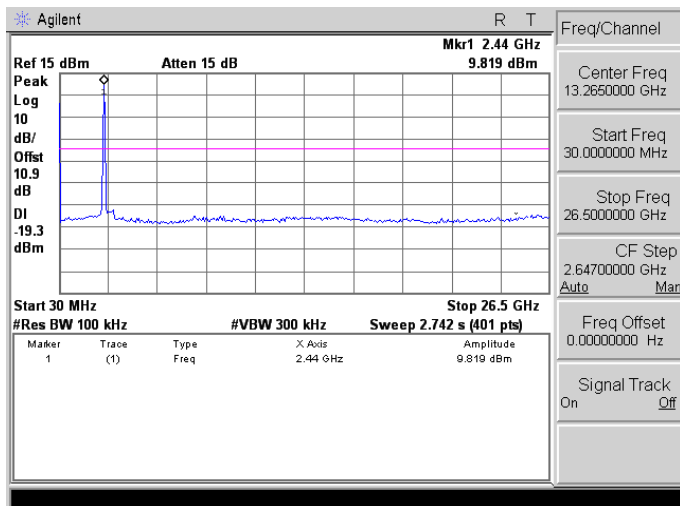


2462

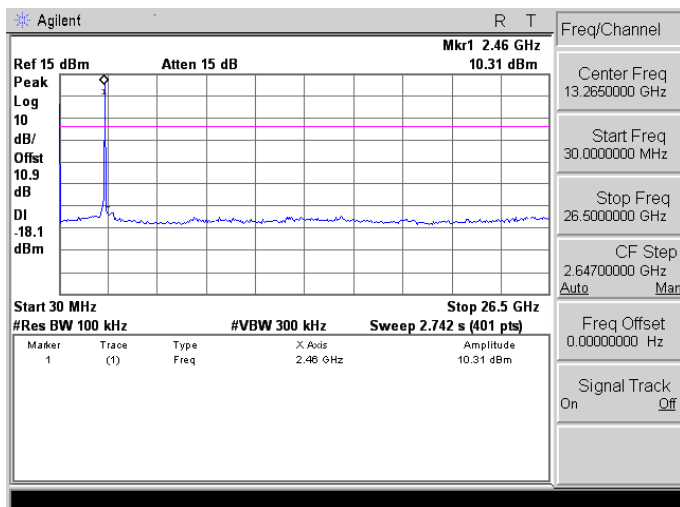


Mode 3: IEEE 802.11g link mode_ANT-1


2412

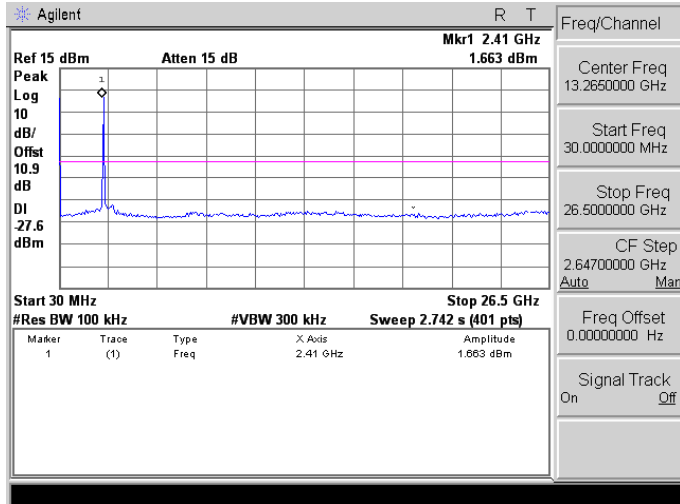

2437

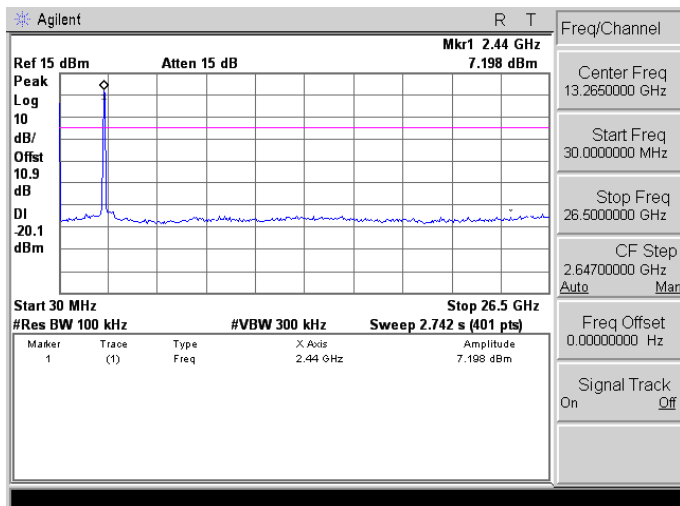

2462

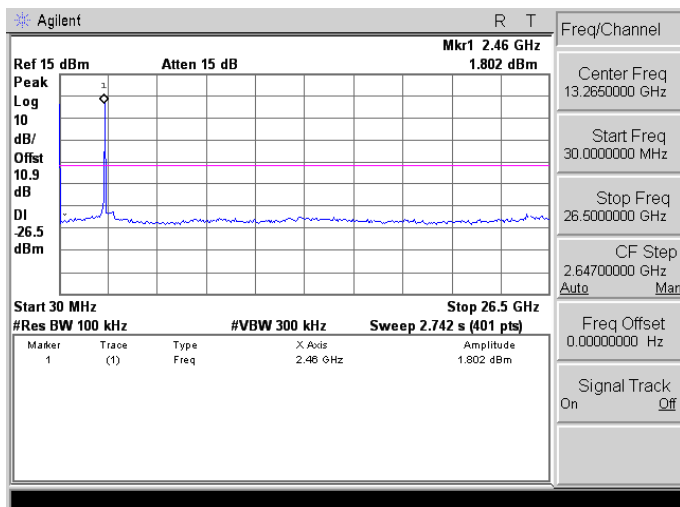

Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode_ANT-1

<p>2412</p>	<p>Agilent R T Ref 15 dBm Atten 15 dB Mkr1 2.41 GHz Peak 10.9 dB/Offset 10.9 dB DI -26.4 dBm Amplitude: -0.129 dBm Start 30 MHz Stop 26.5 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.742 s (401 pts)</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.41 GHz</td> <td>-0.129 dBm</td> </tr> </tbody> </table> <p>Freq/Channel Center Freq 13.2650000 GHz Start Freq 30.0000000 MHz Stop Freq 26.5000000 GHz CF Step 2.64700000 GHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.41 GHz	-0.129 dBm
Marker	Trace	Type	X Axis	Amplitude							
1	(1)	Freq	2.41 GHz	-0.129 dBm							
<p>2437</p>	<p>Agilent R T Ref 15 dBm Atten 15 dB Mkr1 2.44 GHz Peak 10.9 dB/Offset 10.9 dB DI -18.9 dBm Amplitude: 10.45 dBm Start 30 MHz Stop 26.5 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.742 s (401 pts)</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.44 GHz</td> <td>10.45 dBm</td> </tr> </tbody> </table> <p>Freq/Channel Center Freq 13.2650000 GHz Start Freq 30.0000000 MHz Stop Freq 26.5000000 GHz CF Step 2.64700000 GHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.44 GHz	10.45 dBm
Marker	Trace	Type	X Axis	Amplitude							
1	(1)	Freq	2.44 GHz	10.45 dBm							
<p>2462</p>	<p>Agilent R T Ref 15 dBm Atten 15 dB Mkr1 2.46 GHz Peak 10.9 dB/Offset 10.9 dB DI -25.3 dBm Amplitude: 2.313 dBm Start 30 MHz Stop 26.5 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.742 s (401 pts)</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.46 GHz</td> <td>2.313 dBm</td> </tr> </tbody> </table> <p>Freq/Channel Center Freq 13.2650000 GHz Start Freq 30.0000000 MHz Stop Freq 26.5000000 GHz CF Step 2.64700000 GHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.46 GHz	2.313 dBm
Marker	Trace	Type	X Axis	Amplitude							
1	(1)	Freq	2.46 GHz	2.313 dBm							


Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode_ANT-1

<p>2422</p>	<p>Agilent R T Ref 15 dBm Atten 15 dB Mkr1 2.42 GHz 5.733 dBm Peak Log 10 dB/Offset 10.9 dB DI -25.2 dBm Start 30 MHz Stop 26.5 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.742 s (401 pts) <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.42 GHz</td> <td>-5.733 dBm</td> </tr> </tbody> </table> Freq/Channel Center Freq 13.2650000 GHz Start Freq 30.0000000 MHz Stop Freq 26.5000000 GHz CF Step 2.64700000 GHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.42 GHz	-5.733 dBm
Marker	Trace	Type	X Axis	Amplitude							
1	(1)	Freq	2.42 GHz	-5.733 dBm							
<p>2437</p>	<p>Agilent R T Ref 15 dBm Atten 15 dB Mkr1 2.44 GHz 3.068 dBm Peak Log 10 dB/Offset 10.9 dB DI -29.3 dBm Start 30 MHz Stop 26.5 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.742 s (401 pts) <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.44 GHz</td> <td>-3.068 dBm</td> </tr> </tbody> </table> Freq/Channel Center Freq 13.2650000 GHz Start Freq 30.0000000 MHz Stop Freq 26.5000000 GHz CF Step 2.64700000 GHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.44 GHz	-3.068 dBm
Marker	Trace	Type	X Axis	Amplitude							
1	(1)	Freq	2.44 GHz	-3.068 dBm							
<p>2452</p>	<p>Agilent R T Ref 15 dBm Atten 15 dB Mkr1 2.45 GHz 7.515 dBm Peak Log 10 dB/Offset 10.9 dB DI -34.8 dBm Start 30 MHz Stop 26.5 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.742 s (401 pts) <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.45 GHz</td> <td>-7.515 dBm</td> </tr> </tbody> </table> Freq/Channel Center Freq 13.2650000 GHz Start Freq 30.0000000 MHz Stop Freq 26.5000000 GHz CF Step 2.64700000 GHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.45 GHz	-7.515 dBm
Marker	Trace	Type	X Axis	Amplitude							
1	(1)	Freq	2.45 GHz	-7.515 dBm							


Conducted Band Edge

Mode 2: IEEE 802.11b link mode_ANT-0

2412

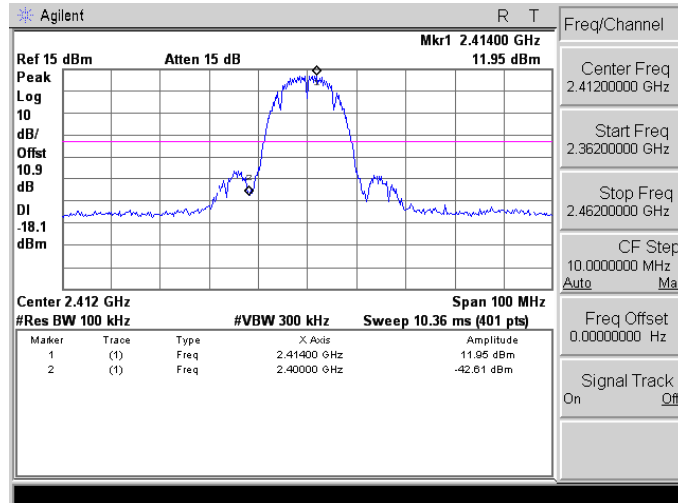


2462

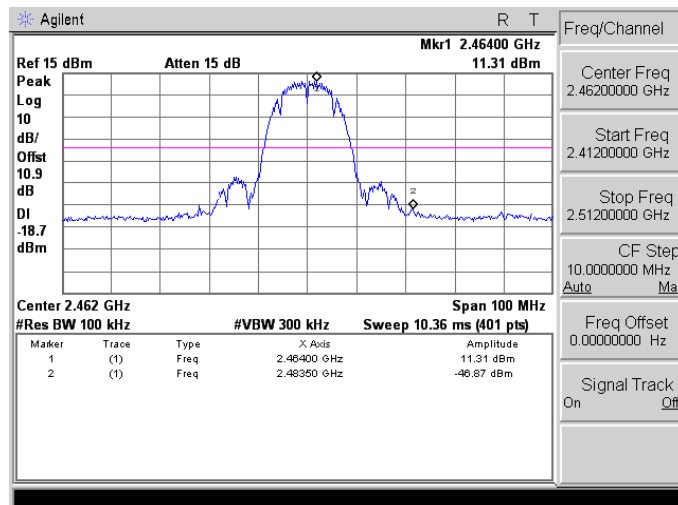


Mode 3: IEEE 802.11g link mode_ANT-0

2412

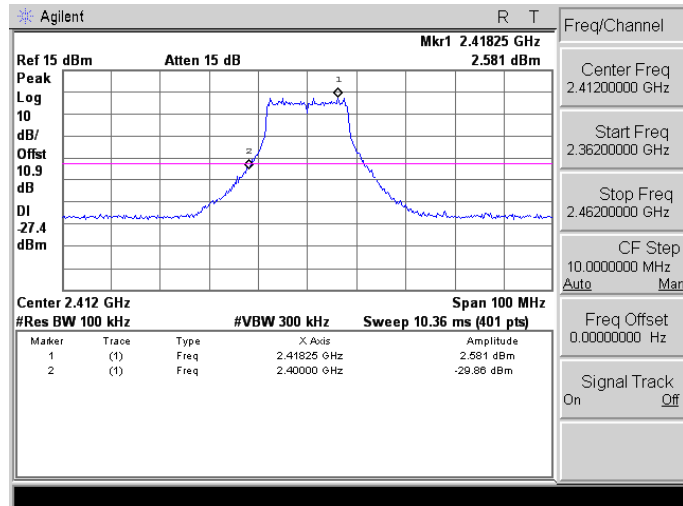


2462

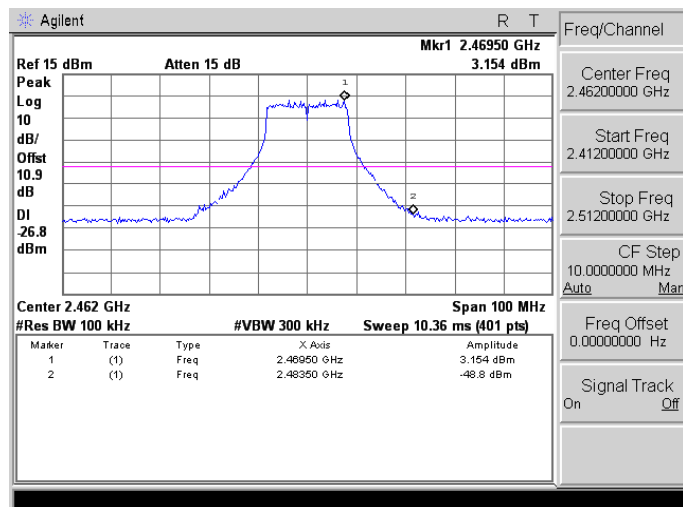


Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode_ANT-0

2412

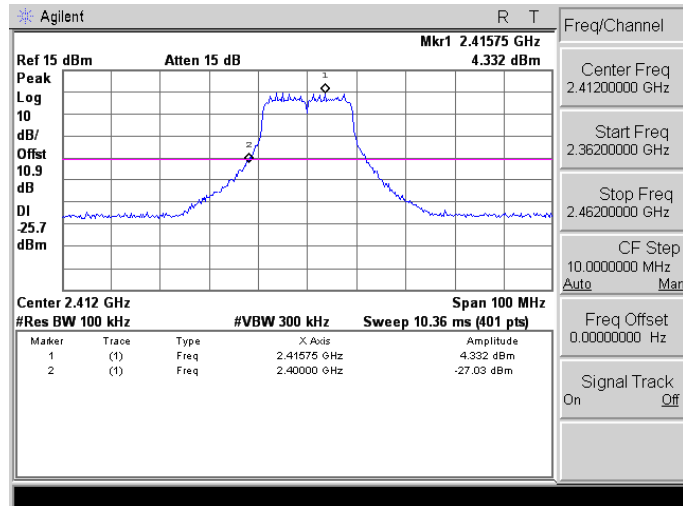


2462

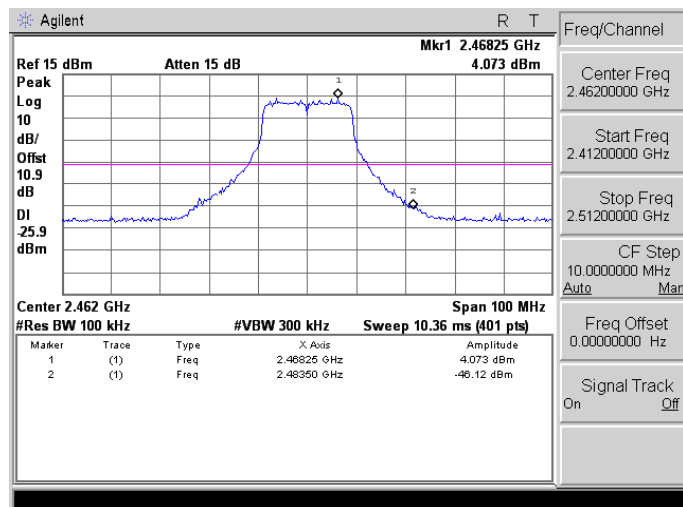


Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode_ANT-0

2422

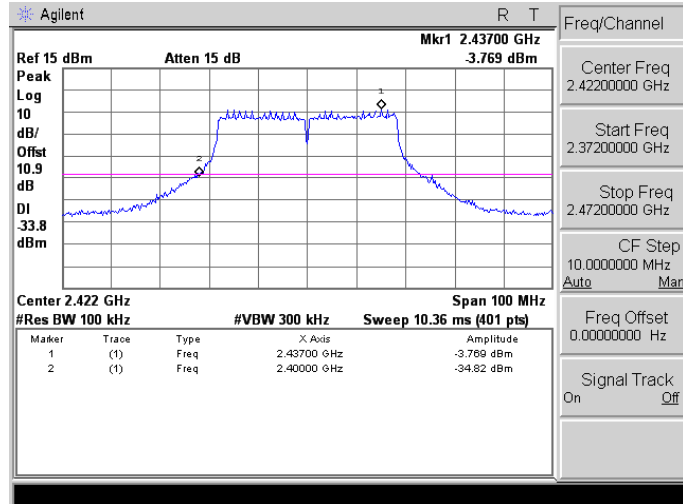


2452

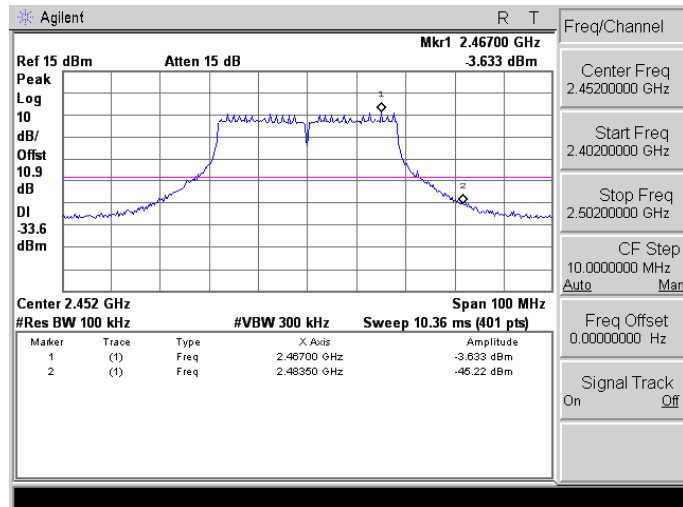


Mode 2: IEEE 802.11b link mode_ANT-1

2412

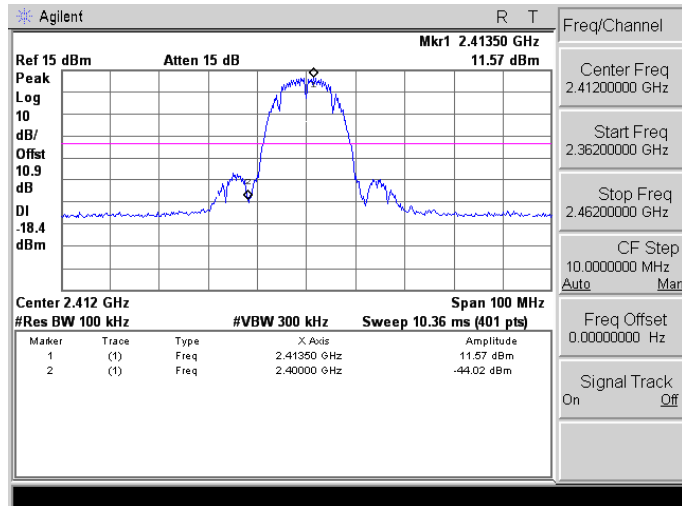


2462

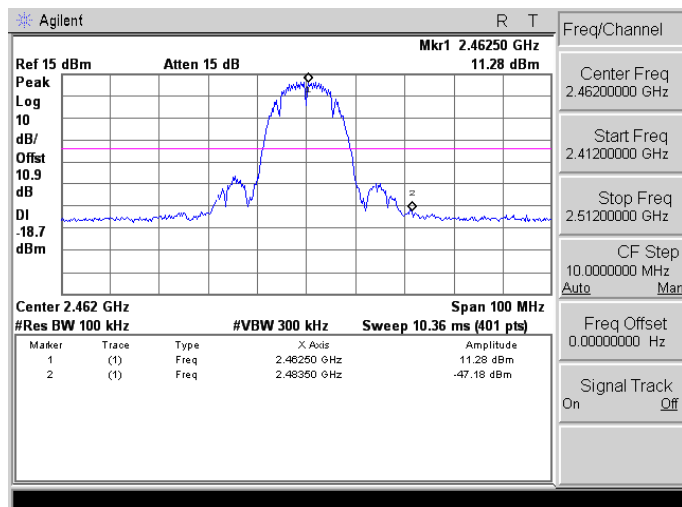


Mode 3: IEEE 802.11g link mode_ANT-1

2412

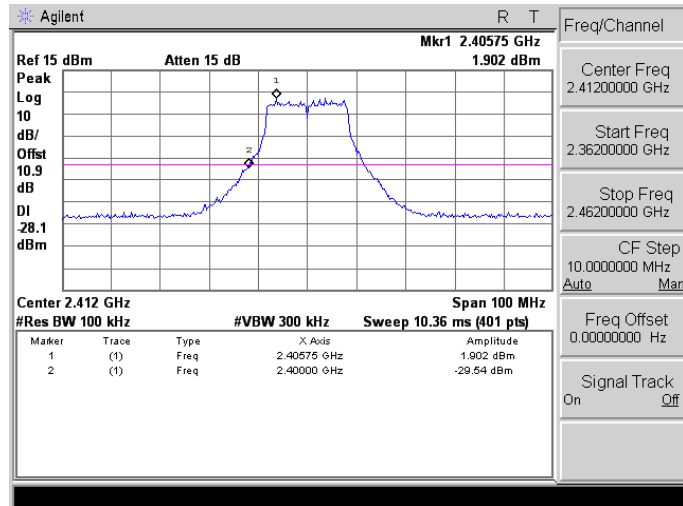


2462

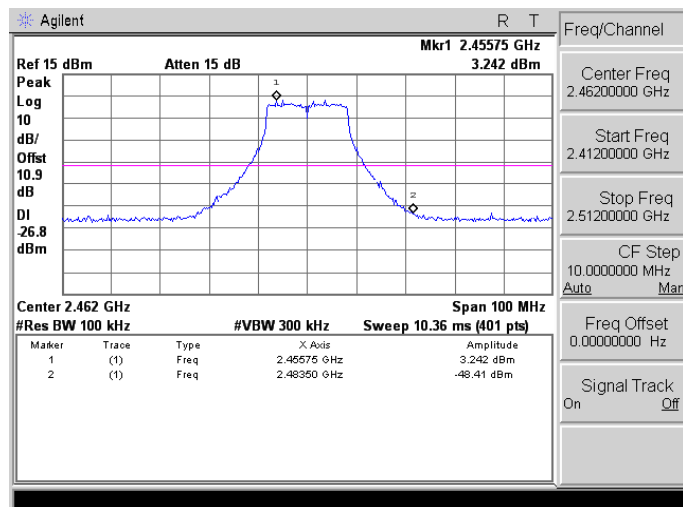


Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode_ANT-1

2412

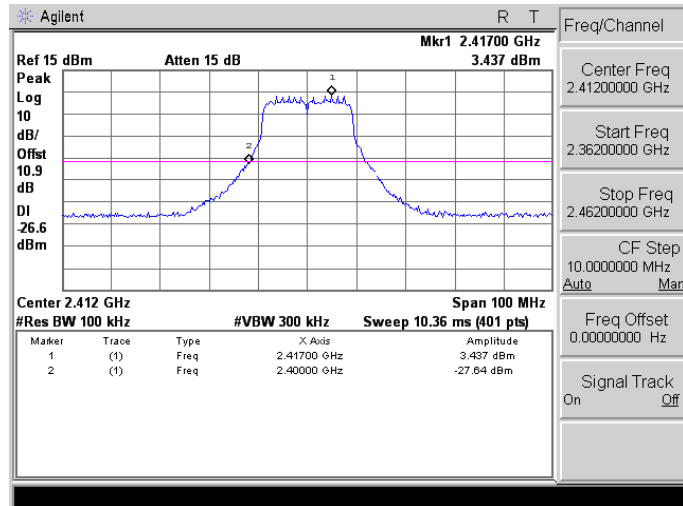


2462

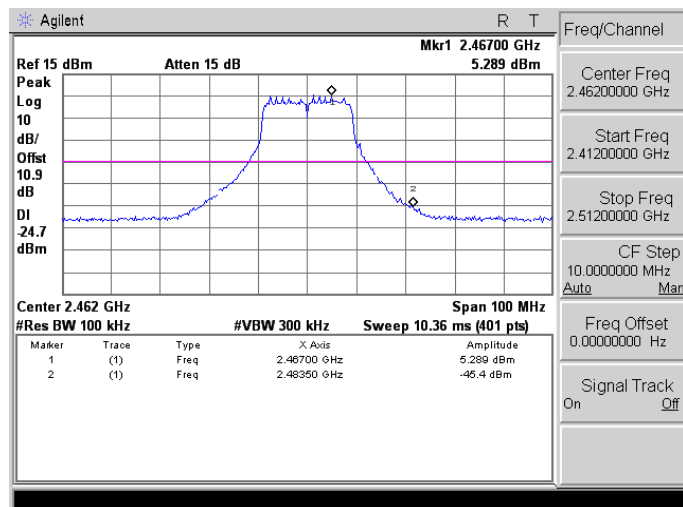


Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode_ANT-1

2422

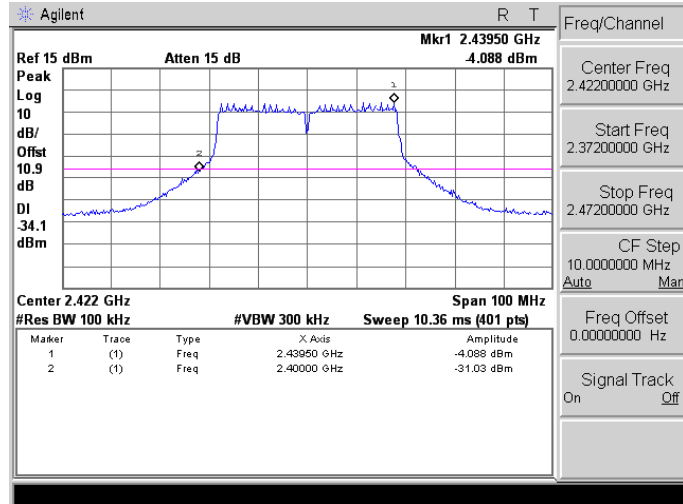

2452

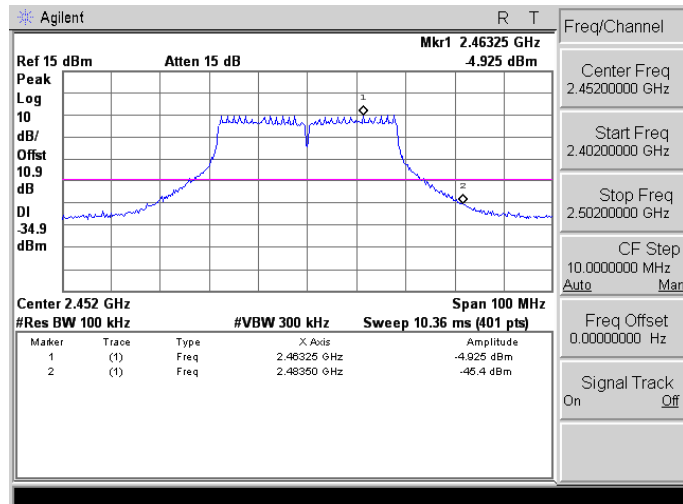


10 Band Edges Measurement

10.1.Limit

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 30 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

10.2.Test Setup

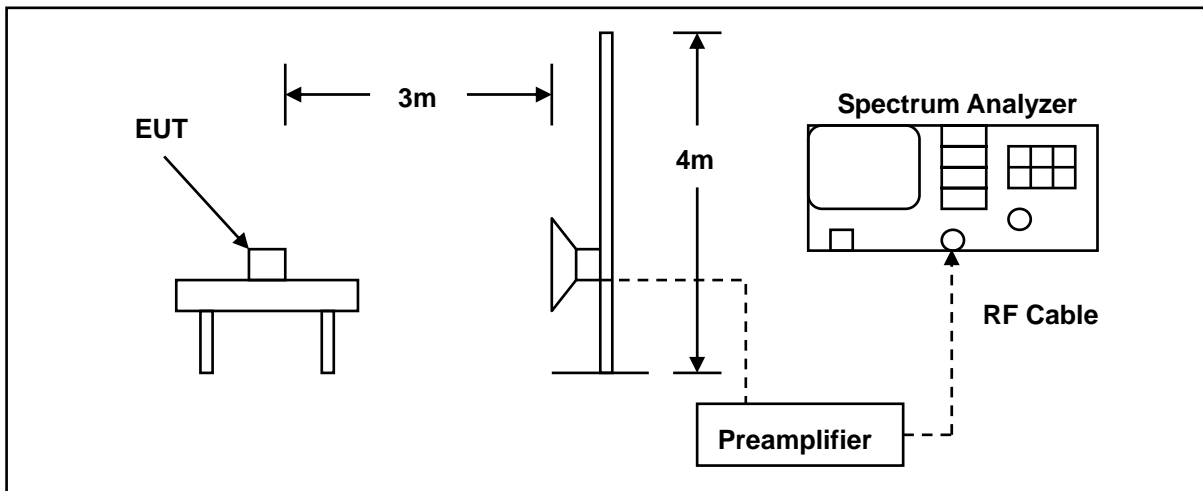

10.3.Test Instruments

3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
RF Pre-selector	Agilent	N9039A	MY46520256	01/06/2015	(1)
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/06/2015	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/24/2015	(1)
Pre Amplifier	Agilent	8447D	2944A10961	02/24/2015	(1)
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/12/2015	(1)
Microwave Cable	EMCI	EMC-104-SM-S M-14000	140202	02/24/2015	(1)
Microwave Cable	EMCI	EMC104-SM-S M-600	140301	02/24/2015	(1)
Test Site	ATL	TE01	888001	08/28/2014	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

10.4. Test Procedure

The EUT tested to DTS test procedure of KDB558074D01 for compliance to FCC 47CFR 15.247 requirements.

The emissions on the harmonics frequencies, the limits, and the margin of compliance are presented. These tests were made when the transmitter was in full radiated power. The additional test was performed to show compliance with the requirement at the band-edge frequency 2483.5 MHz and up to 2500 MHz and at 2390.0 MHz.

The transmitter was configured with the worst case antenna and setup to transmit at the highest channel. Then the field strength was measured at 2483.5 MHz.

The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel. Then the field strength was measured at 2390.0 MHz. These tests were performed at 4 different bit rates.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements when Duty cycle $>0.98 / 1/T$ for average measurements when Duty cycle <0.98 .

10.5. Test Result

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	TL-WR841HP			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 2			Date:	08/14/2015		
Frequency:	2412 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2333.100	61.21	-0.71	60.50	74.00	-13.50	peak	H
2333.100	47.22	-0.71	46.51	54.00	-7.49	AVG	H
2390.000	56.06	-0.46	55.60	74.00	-18.40	peak	H
2390.000	45.21	-0.46	44.75	54.00	-9.25	AVG	H
2331.890	70.65	-0.72	69.93	74.00	-4.07	peak	V
2331.890	54.59	-0.72	53.87	54.00	-0.13	AVG	V
2390.000	62.32	-0.46	61.86	74.00	-12.14	peak	V
2390.000	50.98	-0.46	50.52	54.00	-3.48	AVG	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	TL-WR841HP			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 2			Date:	08/14/2015		
Frequency:	2462 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	57.56	-0.06	57.50	74.00	-16.50	peak	H
2483.500	47.53	-0.06	47.47	54.00	-6.53	AVG	H
2485.240	57.87	-0.06	57.81	74.00	-16.19	peak	H
2485.240	46.30	-0.06	46.24	54.00	-7.76	AVG	H
2483.500	63.80	-0.06	63.74	74.00	-10.26	peak	V
2483.500	53.51	-0.06	53.45	54.00	-0.55	AVG	V
2485.560	66.08	-0.05	66.03	74.00	-7.97	peak	V
2485.560	51.75	-0.05	51.70	54.00	-2.30	AVG	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	TL-WR841HP			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 3			Date:	08/14/2015		
Frequency:	2412 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2335.850	58.33	-0.70	57.63	74.00	-16.37	peak	H
2335.850	45.40	-0.70	44.70	54.00	-9.30	AVG	H
2390.000	59.22	-0.46	58.76	74.00	-15.24	peak	H
2390.000	47.55	-0.46	47.09	54.00	-6.91	AVG	H
2337.610	67.74	-0.69	67.05	74.00	-6.95	peak	V
2337.610	50.54	-0.69	49.85	54.00	-4.15	AVG	V
2390.000	71.86	-0.46	71.40	74.00	-2.60	peak	V
2390.000	53.41	-0.46	52.95	54.00	-1.05	AVG	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	TL-WR841HP			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 3			Date:	08/14/2015		
Frequency:	2462 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	57.98	-0.06	57.92	74.00	-16.08	peak	H
2483.500	47.54	-0.06	47.48	54.00	-6.52	AVG	H
2483.800	60.09	-0.06	60.03	74.00	-13.97	peak	H
2483.800	47.34	-0.06	47.28	54.00	-6.72	AVG	H
2483.500	72.73	-0.06	72.67	74.00	-1.33	peak	V
2483.500	53.81	-0.06	53.75	54.00	-0.25	AVG	V
2484.120	73.39	-0.06	73.33	74.00	-0.67	peak	V
2484.120	53.29	-0.06	53.23	54.00	-0.77	AVG	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	TL-WR841HP	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	08/14/2015
Frequency:	2412 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2367.750	59.46	-0.56	58.90	74.00	-15.10	peak	H
2367.750	45.25	-0.56	44.69	54.00	-9.31	AVG	H
2390.000	61.28	-0.46	60.82	74.00	-13.18	peak	H
2390.000	47.75	-0.46	47.29	54.00	-6.71	AVG	H
2335.300	67.40	-0.71	66.69	74.00	-7.31	peak	V
2335.300	49.52	-0.71	48.81	54.00	-5.19	AVG	V
2390.000	72.38	-0.46	71.92	74.00	-2.08	peak	V
2390.000	54.18	-0.46	53.72	54.00	-0.28	AVG	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	TL-WR841HP	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	08/14/2015
Frequency:	2462 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	57.62	-0.06	57.56	74.00	-16.44	peak	H
2483.500	47.99	-0.06	47.93	54.00	-6.07	AVG	H
2483.600	60.58	-0.06	60.52	74.00	-13.48	peak	H
2483.600	47.94	-0.06	47.88	54.00	-6.12	AVG	H
2483.500	70.40	-0.06	70.34	74.00	-3.66	peak	V
2483.500	53.80	-0.06	53.74	54.00	-0.26	AVG	V
2484.560	73.62	-0.06	73.56	74.00	-0.44	peak	V
2484.560	53.08	-0.06	53.02	54.00	-0.98	AVG	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	TL-WR841HP			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 5			Date:	08/14/2015		
Frequency:	2422 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2387.520	61.24	-0.47	60.77	74.00	-13.23	peak	H
2387.520	46.91	-0.47	46.44	54.00	-7.56	AVG	H
2390.000	61.85	-0.46	61.39	74.00	-12.61	peak	H
2390.000	47.79	-0.46	47.33	54.00	-6.67	AVG	H
2387.760	72.91	-0.47	72.44	74.00	-1.56	peak	V
2387.760	53.85	-0.47	53.38	54.00	-0.62	AVG	V
2390.000	72.08	-0.46	71.62	74.00	-2.38	peak	V
2390.000	54.04	-0.46	53.58	54.00	-0.42	AVG	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	TL-WR841HP			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 5			Date:	08/14/2015		
Frequency:	2452 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	63.78	-0.06	63.72	74.00	-10.28	peak	H
2483.500	48.06	-0.06	48.00	54.00	-6.00	AVG	H
2483.800	66.07	-0.06	66.01	74.00	-7.99	peak	H
2483.800	48.07	-0.06	48.01	54.00	-5.99	AVG	H
2483.500	73.91	-0.06	73.85	74.00	-0.15	peak	V
2483.500	53.15	-0.06	53.09	54.00	-0.91	AVG	V
2484.300	73.17	-0.06	73.11	74.00	-0.89	peak	V
2484.300	52.90	-0.06	52.84	54.00	-1.16	AVG	V

11 Antenna Measurement

11.1.Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2.Antenna Connector Construction

The antenna used in this product is External dismountable Antenna. And the maximum Gain of this antenna is only 9 dBi.