

FCC

EMC

TEST REPORT


ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
X1 MAX FDD-LTE Smartphone


ISSUED TO
TP-LINK Technologies Co., Ltd.

Building 24-1F/3F/4F/5F, 28-1F/2F/3F/4F Science and Technology
Park, Shennan Road, Nanshan District, Shenzhen City, Guangdong
Province, P.R. China

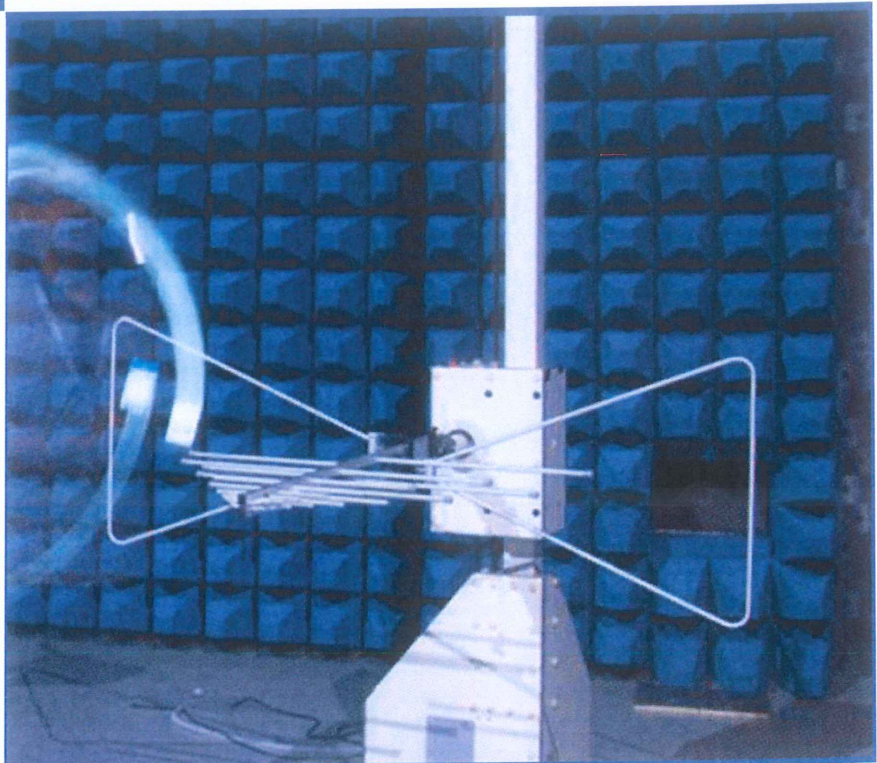

Tested by: Xia Long
Xia Long
(Engineer)
Date May 15, 2017

Approved by: [Signature]
Liao Jianming
(Technical Director)
Date May 15, 2017

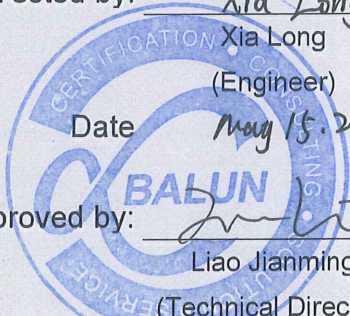

Report No.: BL-SZ1730238-401
EUT Name: X1 MAX FDD-LTE Smartphone
Model Name: TP903C
Brand Name: neffos
Test Standard: 47 CFR Part 15 Subpart B
FCC ID: TE7X1MAXV1

Test Conclusion: Pass
Test Date: Apr. 20, 2017 ~ Apr. 26, 2017
Date of Issue: May 15, 2017

NOTE: This test report can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. BALUN Laboratory. Any objections should be raised within thirty days from the date of issue. To validate the report, please visit BALUN website.

Revision History

<u>Version</u>	<u>Issue Date</u>	<u>Revisions Content</u>
<u>Rev. 01</u>	<u>May 15, 2017</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION	4
1.1	Identification of the Testing Laboratory	4
1.2	Identification of the Responsible Testing Location	4
1.3	Laboratory Condition	4
1.4	Announce	4
2	PRODUCT INFORMATION	5
2.1	Applicant Information	5
2.2	Manufacturer Information	5
2.3	Factory Information	5
2.4	General Description for Equipment under Test (EUT)	5
2.5	Ancillary Equipment	6
2.6	Technical Information	6
3	SUMMARY OF TEST RESULTS.....	7
3.1	Test Standards	7
3.2	Verdict	7
3.3	Test Uncertainty	7
4	GENERAL TEST CONFIGURATIONS.....	8
4.1	Test Environments	8
4.2	Test Equipment List	8
4.3	Test Enclosure list.....	9
4.4	Test Configurations	10
4.5	Test Setups	11
4.6	Test Conditions	13
5	TEST ITEMS.....	14
5.1	Emission Tests	14
ANNEX A	TEST RESULTS.....	16

A.1 Radiated Emission 16

A.2 Conducted Emission 22

ANNEX B TEST SETUP PHOTOS 26

ANNEX C EUT EXTERNAL PHOTOS 26

ANNEX D EUT INTERNAL PHOTOS 26

1 GENERAL INFORMATION

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	<p>The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1.</p> <p>The laboratory has been listed by US Federal Communications Commission to perform electromagnetic emission measurements. The recognition numbers of test site are 832625.</p> <p>The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.</p>
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Laboratory Condition

Ambient Temperature	20°C~25°C
Ambient Relative Humidity	45% - 55%
Ambient Pressure	100 kPa - 102 kPa

1.4 Announce

- (1) The test report reference to the report template version v6.4.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	TP-LINK Technologies Co., Ltd.
Address	Building 24-1F/3F/4F/5F, 28-1F/2F/3F/4F Science and Technology Park, Shennan Road, Nanshan District, Shenzhen City, Guangdong Province, P.R. China

2.2 Manufacturer Information

Manufacturer	TP-LINK Technologies Co., Ltd.
Address	Building 24-1F/3F/4F/5F, 28-1F/2F/3F/4F Science and Technology Park, Shennan Road, Nanshan District, Shenzhen City, Guangdong Province, P.R. China

2.3 Factory Information

Factory	N/A
Address	N/A

2.4 General Description for Equipment under Test (EUT)

EUT Name	X1 MAX FDD-LTE Smartphone
Model Name Under Test	TP903C
Series Model Name	TP903CXYZZ, TP903C
Description of Model name differentiation	The equipment model TP903C and TP903CXYZZ (X=2 or 4 (2 indicates Cloudy Grey, 4 indicates Sunrise Gold); Y= A or 6 (A indicates the memory is 4G RAM + 64G Flash, 6 indicates the memory is 3G RAM + 32G Flash); ZZ indicates different national.) are the EUT model, the electrical parameters and internal structure of circuit are same. Only the model name, colors, memory versions and shipping country are different.
Hardware Version	N/A
Software Version	N/A
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A
Random-access Memory	4G RAM + 64G Flash
Network and Wireless connectivity	2G Network GSM GPRS/EDGE 850/1900 MHz 3G Network WCDMA HSDPA/HSUPA Band 2/4/5 4G Network FDD Band 2/4/7 Bluetooth 3.0, Bluetooth 4.0 Low Energy (BLE), WIFI 802.11a, 802.11b, 802.11g, 802.11n(HT20/40) FM, GPS, GLONASS

2.5 Ancillary Equipment

Ancillary Equipment 1	Battery	
	Brand Name	neffos
	Model No.	NBL-35A3000
	Serial No.	N/A
	Capacitance	3000 mAh
	Rated Voltage	3.85 V
	Limited Voltage	4.40 V
Ancillary Equipment 2	Adapter	
	Brand Name	neffos
	Model No.	N090200-2B3 (US Plug)
	Serial No.	N/A
	Rated Input	100-240 V~, 0.3 A, 50/60 Hz
Rated Output	5 V=, 3 A or 9 V , 2 A or 12 V , 1.5 A	
Ancillary Equipment 3	USB Cable	
	Length (Approx.)	100 cm
Ancillary Equipment 4	Earphone	
	Length (Approx.)	125 cm

2.6 Technical Information

N/A

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	FCC 47 CFR Part 15 Subpart B (10-1-15 Edition)	Unintentional Radiators
2	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low- Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

3.2 Verdict

No.	Description	FCC Rule	Test Verdict	Result
1	Radiated Emission	15.109	Pass	Annex A .1
2	Conducted Emission, AC Ports	15.107	Pass	Annex A .2

3.3 Test Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Conducted emissions (9 kHz-30 MHz)	3.23 dB
Radiated emissions (30 MHz-1 GHz)	4.30 dB
Radiated emissions (1 GHz-18 GHz)	4.81 dB
Radiated emissions (18 GHz-40 GHz)	5.71 dB

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

Environment Parameter	Selected Values During Tests			
	Temperature	Voltage	Relative Humidity	Ambient Pressure
Normal Temperature, Normal Voltage (NTNV)	23°C~26°C	AC 120 V/60 Hz from Adapter or DC 3.85 V from Battery	50%-55%	100 to 102 kPa

4.2 Test Equipment List

Radiated Emission Test For Frequency Below 1 GHz						
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2016.07.05	2017.07.04	<input checked="" type="checkbox"/>
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9163	9163-977	2016.07.19	2018.07.18	<input checked="" type="checkbox"/>
Test Antenna-Horn	SCHWARZBECK	BBHA 9120D	9120D-1600	2016.07.12	2018.07.11	<input type="checkbox"/>
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	N/A	2016.08.09	2018.08.08	<input checked="" type="checkbox"/>

Radiated Emission Test For Frequency Above 1 GHz						
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2016.09.09	2017.09.08	<input checked="" type="checkbox"/>
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9163	9163-624	2015.07.22	2017.07.21	<input type="checkbox"/>
Test Antenna-Horn	SCHWARZBECK	BBHA 9120D	9120D-1148	2015.07.22	2017.07.21	<input checked="" type="checkbox"/>
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2019.02.20	<input checked="" type="checkbox"/>

Conducted Emission Test						
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2016.07.05	2017.07.04	<input checked="" type="checkbox"/>
LISN	SCHWARZBECK	NSLK 8127	8127-687	2016.07.05	2017.07.04	<input checked="" type="checkbox"/>
LISN	SCHWARZBECK	NNLK 8129	8129-462	2016.09.14	2017.09.13	<input type="checkbox"/>
AMN	SCHWARZBECK	NNBM8124	8124-509	2016.07.05	2017.07.04	<input type="checkbox"/>
AMN	SCHWARZBECK	NNBM8124	8124-510	2016.07.05	2017.07.04	<input type="checkbox"/>
ISN	TESEQ	ISN T800	34449	2016.07.05	2017.07.04	<input type="checkbox"/>
Shielded Enclosure	ChangNing	CN-130701	130703	N/A	N/A	<input checked="" type="checkbox"/>

4.3 Test Enclosure list


Description	Manufacturer	Model	Serial No.	Length	Description	Use
PC	Dell	015K3N	N/A	N/A	Special Handled	<input checked="" type="checkbox"/>
Laptop	Apple	A1465	N/A	N/A	N/A	<input type="checkbox"/>
Printer	HP	DESKJET 1000	N/A	N/A	N/A	<input checked="" type="checkbox"/>
Keyboard	Dell	N/A	N/A	N/A	N/A	<input checked="" type="checkbox"/>
Mouse	Dell	N/A	N/A	N/A	N/A	<input checked="" type="checkbox"/>
USB disk	Kingston	N/A	N/A	N/A	N/A	<input type="checkbox"/>
TF Card	Kingston	N/A	N/A	N/A	N/A	<input checked="" type="checkbox"/>
VGA Cable	N/A	N/A	N/A	1.5 m	Shielded with core	<input type="checkbox"/>
HDMI Cable	N/A	N/A	N/A	1.5 m	Shielded with core	<input type="checkbox"/>
DVI Cable	N/A	N/A	N/A	1.5 m	Shielded with core	<input type="checkbox"/>
Coaxial video cable	N/A	N/A	N/A	2.0 m	Shielded with core	<input type="checkbox"/>
iPhone	Apple	A1586	N/A	N/A	N/A	<input type="checkbox"/>
Phone	MI	M4	N/A	N/A	N/A	<input type="checkbox"/>
Bluetooth Earphone	SAMSUNG	Gear Circle	N/A	N/A	N/A	<input checked="" type="checkbox"/>
GPS/GLONASS Vector signal generator	R&S	N5172B EXG	N/A	N/A	N/A	<input checked="" type="checkbox"/>
WIFI Router	TP-LINK	TL-WDR7500	N/A	N/A	N/A	<input checked="" type="checkbox"/>
Earphone	N/A	OPPO	N/A	1.1 m	N/A	<input type="checkbox"/>
Car Battery	Camel	55530	N/A	N/A	12 V/55 Ah	<input type="checkbox"/>
Artificial load	N/A	N/A	N/A	N/A	2.5 Ω/100 W	<input type="checkbox"/>
Artificial load	N/A	N/A	N/A	N/A	5 Ω/100 W	<input type="checkbox"/>
Electronic Load	ITECH	IT8511	N/A	N/A	N/A	<input type="checkbox"/>
USB Cable	N/A	N/A	N/A	1.5 m	Shielded with core	<input type="checkbox"/>
DC Power Supply	ITECH	IT6863A	60001401068 7210006	N/A	N/A	<input type="checkbox"/>
LCD Monitor	SAMSUNG	UA32C4000P	N/A	N/A	N/A	<input type="checkbox"/>
LCD Monitor	Dell	U241HB	N/A	N/A	N/A	<input type="checkbox"/>
RJ45 Cable	N/A	N/A	N/A	1.5 m	Shielded with core	<input type="checkbox"/>

4.4 Test Configurations

Test Configurations (TC) No.	Description
Traffic Test Mode	
TC01	<u>The GSM 850 MHz Test Mode</u> GSM 850 Link + Adapter + USB Cable + Battery+ TF Card + Earphone + BT Link + WIFI Link + GPS RX
TC02	<u>The EDGE 850 MHz Test Mode</u> EDGE 850 Link + Adapter + USB Cable + Battery+ TF Card + Earphone + BT Link + WIFI Link + GLONASS RX
TC03	<u>The GSM 1900 Test Mode</u> GSM 1900 Link + Adapter + USB Cable + Battery+ TF Card + Earphone + BT Link + WIFI Link + GPS RX
TC04	<u>The EDGE 1900 MHz Test Mode</u> EDGE 1900 Link + Adapter + USB Cable + Battery+ TF Card + Earphone + BT Link + WIFI Link + GLONASS RX
TC05	<u>The WCDMA Band 2 Test Mode</u> WCDMA Band 2 Link + Adapter + USB Cable + Battery+ TF Card + Earphone + BT Link + WIFI Link + GPS RX
TC06	<u>The WCDMA Band 4 test mode</u> WCDMA Band 4 Link + Adapter + USB Cable + Battery+ TF Card + Earphone + BT Link + WIFI Link + GLONASS RX
TC07	<u>The WCDMA Band 5 test mode</u> WCDMA Band 5 Link + Adapter + USB Cable + Battery+ TF Card + Earphone + BT Link + WIFI Link + GPS RX
TC08	<u>The FDD LTE Band 2 test mode</u> LTE Band 2 Link + Adapter + USB Cable + Battery+ TF Card + Earphone + BT Link + WIFI Link + GLONASS RX
TC09	<u>The FDD LTE Band 4 test mode</u> LTE Band 4 Link + Adapter + USB Cable + Battery+ TF Card + Earphone + BT Link + WIFI Link + GPS RX
TC10	<u>The FDD LTE Band 7 test mode</u> LTE Band 7 Link + Adapter + USB Cable + Battery+ TF Card + Earphone + BT Link + WIFI Link + GLONASS RX
TC11	<u>The Idle Test Mode</u> GSM 850(Idle) + Battery + TF Card + Adapter + USB Cable + FM RX
Amusement Test Mode	
TC12	<u>The USB Test Mode</u> EUT + Battery + TF Card + Earphone + USB Cable + PC + Printer + Keyboard + Mouse
TC13	<u>The Camera Test Mode</u> EUT + Battery + TF Card + Adapter + USB Cable + Earphone
TC14	<u>The Video Play Test Mode</u> EUT + Battery + TF Card + Adapter + USB Cable + Earphone


4.5 Test Setups

Test Setup 1

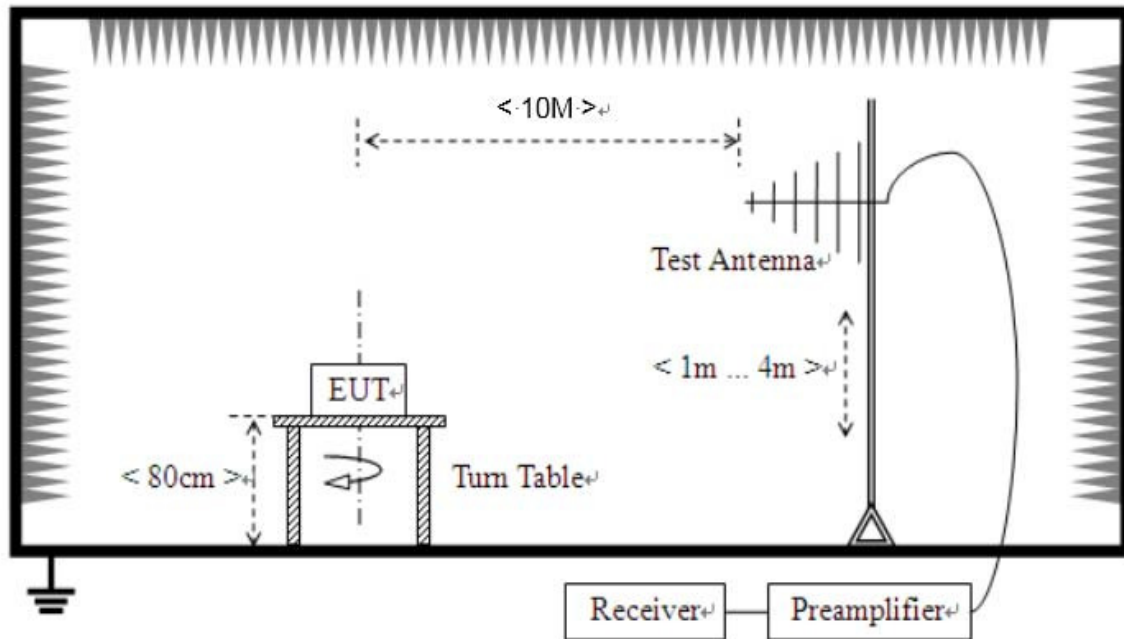


(For Radiated Emission Test (30 MHz-1 GHz))

Test Setup 2

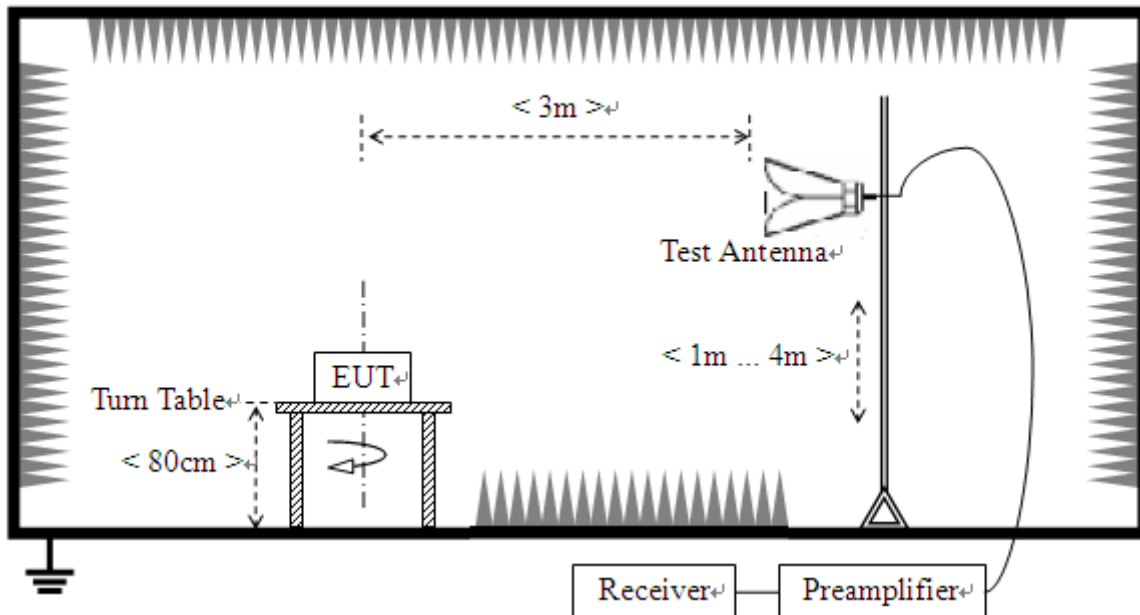

(For Radiated Emission Test (above 1 GHz))

Test Setup 3

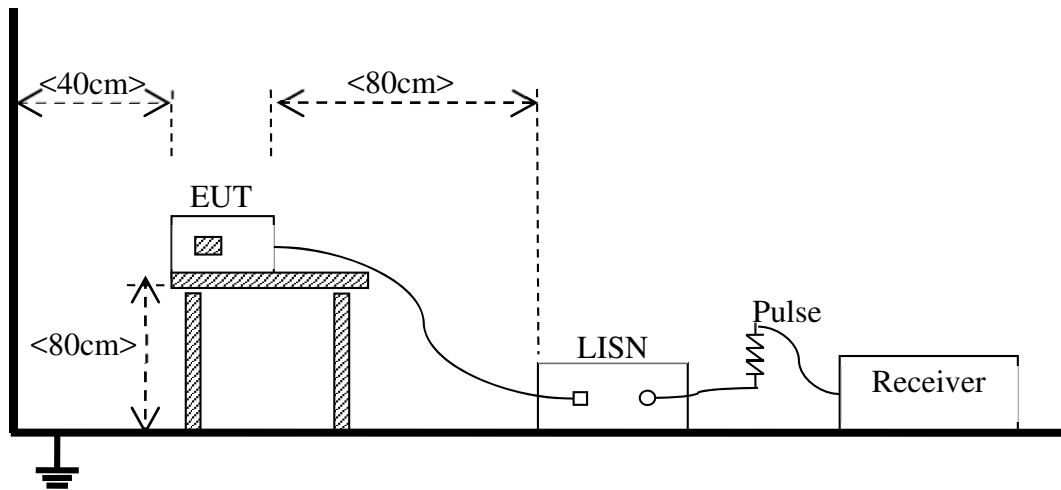

(For Conducted Emission, AC Ports Test)

4.6 Test Conditions

Test Case	Test Conditions	
Radiated Emission	Test Env.	NTNV
	Test Setup	Test Setup 1&2
	Test Configuration	TC01~TC14 ^{Note}
Conducted Emission, AC Ports	Test Env.	NTNV
	Test Setup	Test Setup 3
	Test Configuration	TC01~TC14 ^{Note}

Note: Based on client request, all normal using modes of the normal function were tested but only the worst test data of the worst mode is reported by this report. The GSM 850 MHz Test Mode is the worst mode in this report.

5 TEST ITEMS

5.1 Emission Tests

5.1.1 Radiated Emission

5.1.1.1 Limit

Frequency range (MHz)	Class B (at 3 m)		Class A (at 10 m)	
	Field Strength ($\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)	Field Strength ($\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)
30 - 88	100	40	90	39
88 - 216	150	43.5	150	43.5
216 - 960	200	46	210	46.4
Above 960	500	54	300	49.5

NOTE:

- 1) Field Strength (dB $\mu\text{V/m}$) = $20 \cdot \log$ [Field Strength ($\mu\text{V/m}$)].
- 2) In the emission tables above, the tighter limit applies at the band edges.

5.1.1.2 Test Setup

Refer to 4.5 section (test setup 1 to test setup 2) for radiated emission test, the photo of test setup please refer to ANNEX B.

5.1.1.3 Test Procedure

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

An initial pre-scan was performed in the chamber using the EMI Receiver in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by Bi-Log antenna with 2 orthogonal polarities.

5.1.1.4 Test Result

Please refer to ANNEX A.1.

5.1.2 Conducted Emission

5.1.2.1 Test Limit

Frequency range (MHz)	Class A	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	79	66
0.50 - 30	73	60

Frequency range (MHz)	Class B	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- 1) The lower limit shall apply at the band edges.
- 2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50 MHz.

5.1.2.2 Test Setup

Refer to 4.5 section test (test setup 3) for conducted emission, the photo of test setup please refer to ANNEX B.

5.1.2.3 Test Procedure

The EUT is connected to the power mains through a LISN which provides 50 Ω /50 μ H of coupling impedance for the measuring instrument. The test frequency range is from 150 kHz to 30 MHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels that are more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.1.2.4 Test Result

Please refer to ANNEX A.2.

ANNEX A TEST RESULTS

A.1 Radiated Emission

Note 1: The symbol of "--" in the table which means not application.


Note 2: For the test data above 1 GHz, according the ANSI C63.4-2014, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note 3: This frequency which remake N/A should be ignored because they are MS and SS carrier frequency, Bluetooth or WIFI carrier frequency.

Test Data and Plots


The GSM 850 MHz Test Mode

A.1.1 Test Antenna Vertical, 30 MHz – 1 GHz

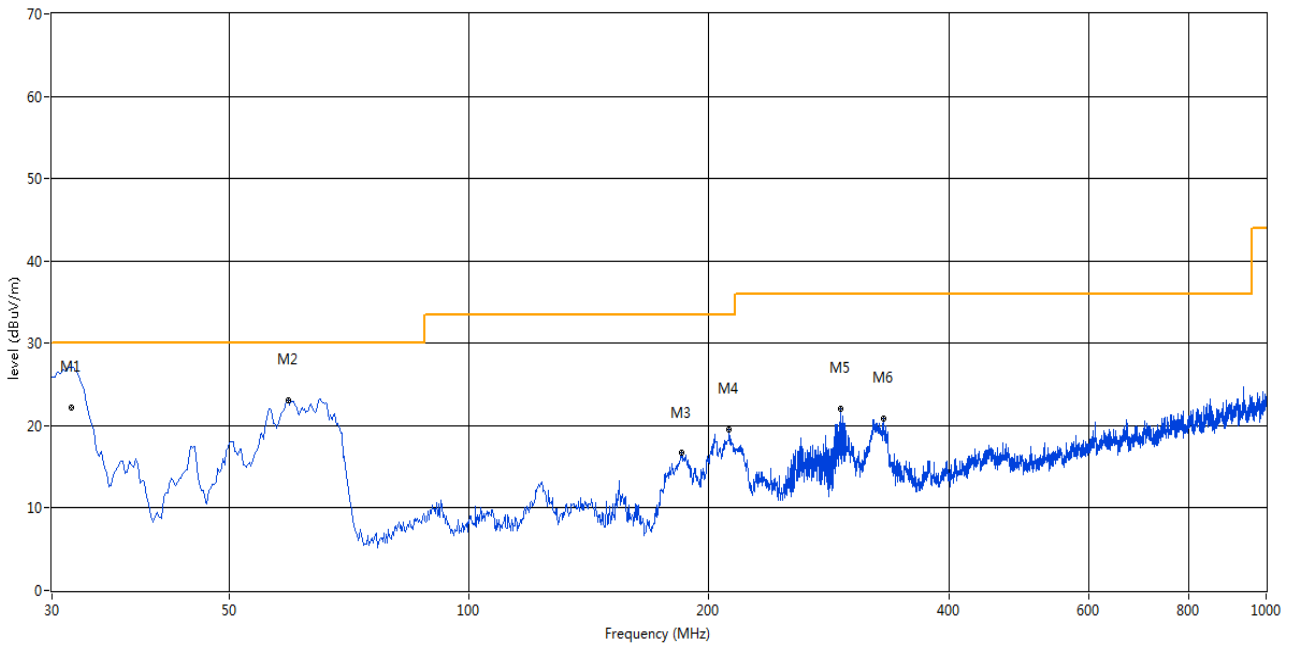


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	31.234	26.60	-16.86	30.0	3.40	Peak	278.00	103.00	Vertical	N/A
1*	31.234	22.14	-16.86	30.0	7.86	QP	278.00	103.00	Vertical	Pass
2	59.335	23.09	-14.90	30.0	6.91	Peak	104.00	300	Vertical	Pass
3	184.676	16.67	-16.57	33.5	16.83	Peak	333.00	100	Vertical	Pass
4	212.072	19.52	-15.10	33.5	13.98	Peak	39.00	100	Vertical	Pass
5	293.047	22.05	-12.41	36.0	13.95	Peak	18.00	100	Vertical	Pass
6	331.110	20.89	-11.32	36.0	15.11	Peak	230.00	100	Vertical	Pass

A.1.2 Test Antenna Horizontal, 30 MHz – 1 GHz

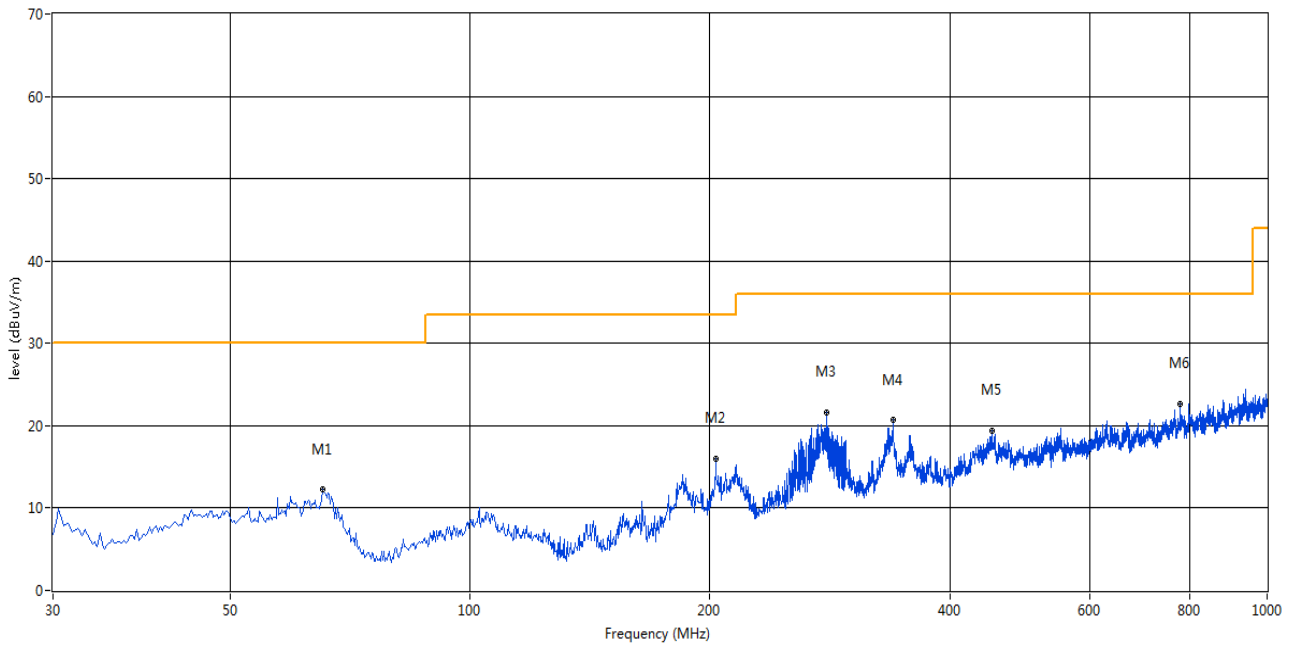


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	65.396	12.24	-15.84	30.0	17.76	Peak	0.00	400	Horizontal	Pass
2	203.587	16.03	-14.94	33.5	17.47	Peak	49.00	400	Horizontal	Pass
3	279.955	21.62	-12.84	36.0	14.38	Peak	239.00	300	Horizontal	Pass
4	339.110	20.65	-10.87	36.0	15.35	Peak	48.00	300	Horizontal	Pass
5	452.087	19.36	-8.85	36.0	16.64	Peak	229.00	300	Horizontal	Pass
6	778.168	22.68	-2.70	36.0	13.32	Peak	107.00	400	Horizontal	Pass

A.1.3 Test Antenna Vertical, 1 GHz – 6 GHz

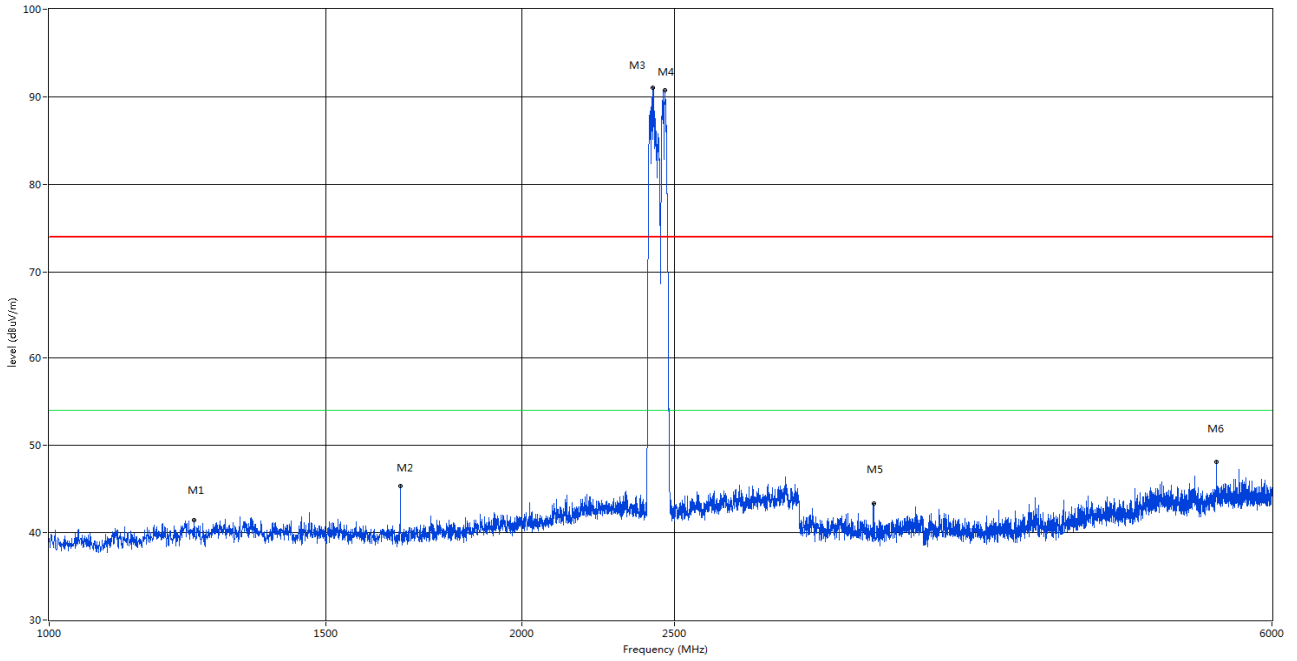

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1236.500	41.41	-6.39	74.0	32.59	Peak	291.80	100	Vertical	Pass
2	1673.000	45.34	-6.04	74.0	28.66	Peak	176.10	100	Vertical	N/A
3	2423.000	91.04	-2.24	74.0	-17.04	Peak	320.60	100	Vertical	N/A
4	2465.500	90.78	-2.83	74.0	-16.78	Peak	23.10	100	Vertical	N/A
5	3346.500	43.36	5.55	74.0	30.64	Peak	293.70	100	Vertical	Pass
6	5529.750	48.12	10.52	74.0	25.88	Peak	209.80	100	Vertical	Pass

A.1.4 Test Antenna Horizontal, 1 GHz – 6 GHz

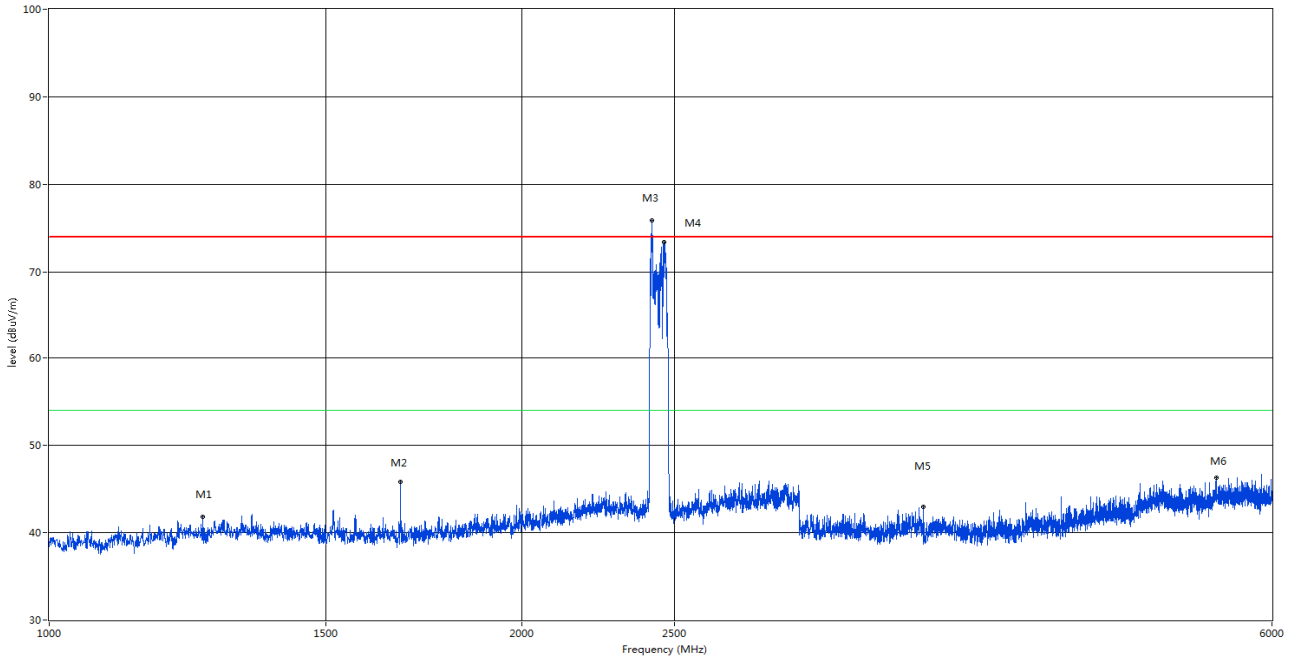


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1252.000	41.84	-6.95	74.0	32.16	Peak	312.20	100	Horizontal	Pass
2	1673.000	45.80	-6.04	74.0	28.20	Peak	181.20	100	Horizontal	N/A
3	2418.500	75.88	-1.83	74.0	-1.88	Peak	268.20	100	Horizontal	N/A
4	2461.000	73.41	-2.79	74.0	0.59	Peak	274.00	100	Horizontal	N/A
5	3598.500	42.94	5.93	74.0	31.06	Peak	312.90	100	Horizontal	Pass
6	5529.750	46.29	10.52	74.0	27.71	Peak	123.80	100	Horizontal	Pass

Test Data and Plots


The USB Test Mode

A.1.5 Test Antenna Vertical, 30 MHz – 1 GHz

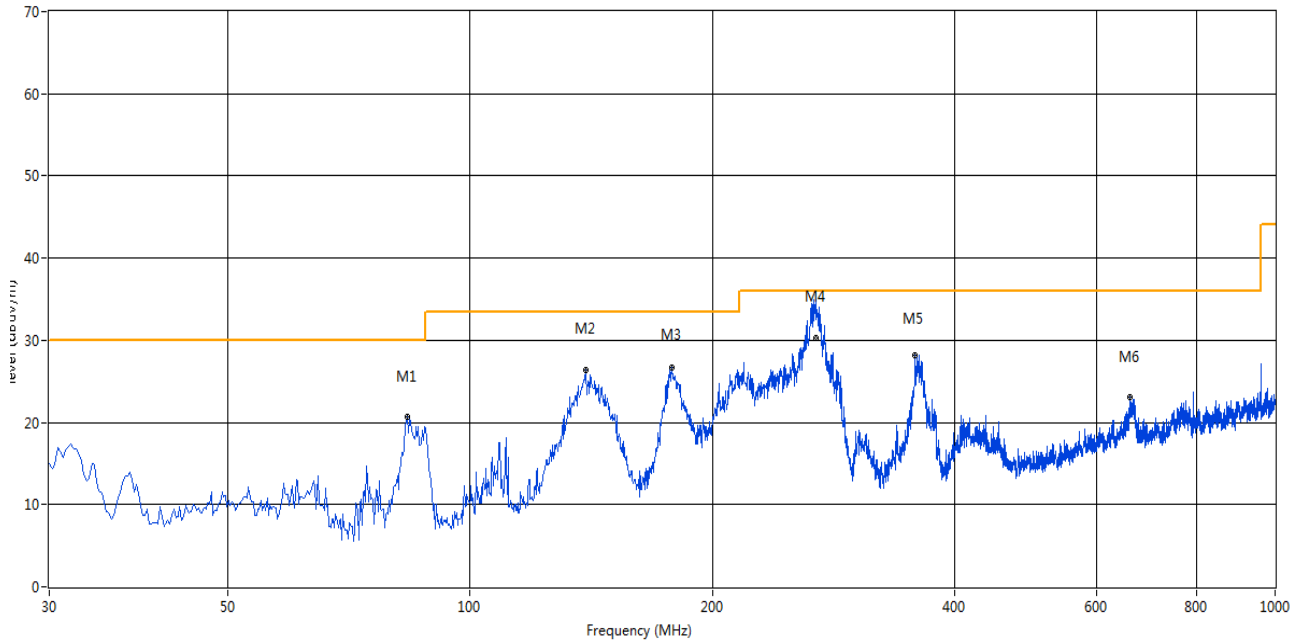

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	83.579	20.72	-18.74	30.0	9.28	Peak	3.00	200	Vertical	Pass
2	139.098	26.37	-18.82	33.5	7.13	Peak	83.00	100	Vertical	Pass
3	178.130	26.66	-17.11	33.5	6.84	Peak	213.00	100	Vertical	Pass
4	268.573	36.00	-13.09	36.0	0.00	Peak	153.00	141.00	Vertical	N/A
4*	268.573	30.35	-13.09	36.0	5.65	QP	153.00	141.00	Vertical	Pass
5	357.293	28.21	-10.57	36.0	7.79	Peak	111.00	100	Vertical	Pass
6	660.585	23.15	-4.58	36.0	12.85	Peak	35.00	100	Vertical	Pass

A.1.6 Test Antenna Horizontal, 30 MHz – 1 GHz

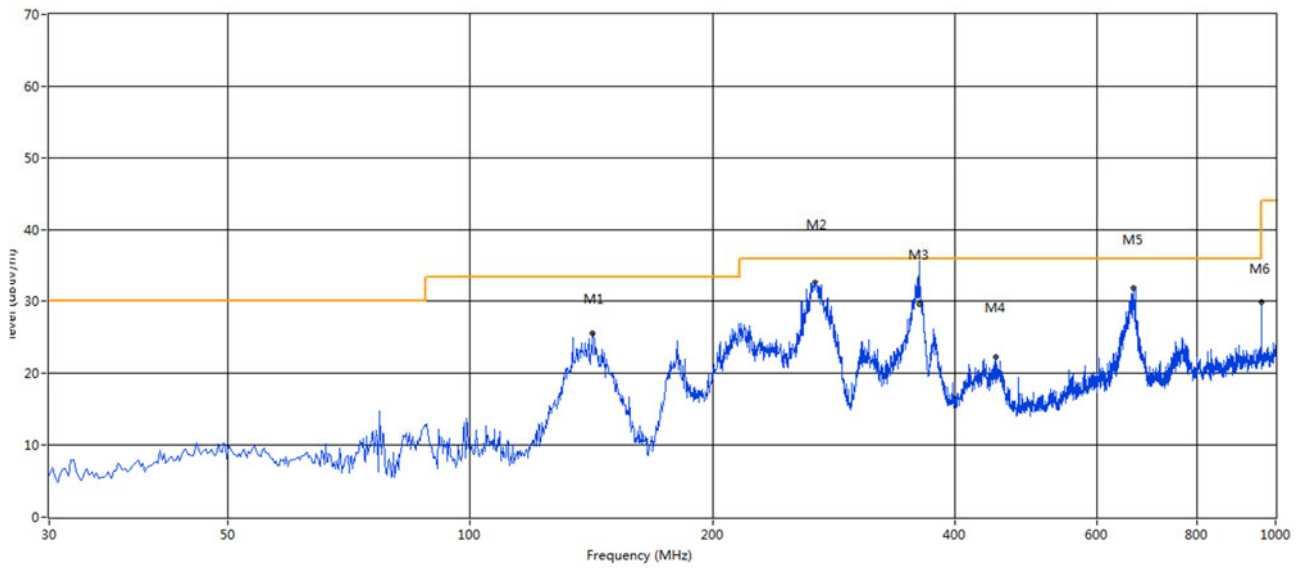

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	142.007	25.48	-18.91	33.5	8.02	Peak	205.00	400	Horizontal	Pass
2	269.773	32.80	-13.20	36.0	3.20	Peak	328.00	300	Horizontal	Pass
3	360.508	35.69	-10.55	36.0	0.31	Peak	270.00	255.00	Horizontal	N/A
3*	360.508	29.48	-10.55	36.0	6.52	QP	270.00	255.00	Horizontal	Pass
4	449.178	22.25	-8.93	36.0	13.75	Peak	130.00	300	Horizontal	Pass
5	666.888	31.76	-4.52	36.0	4.24	Peak	311.00	100	Horizontal	Pass
6	959.755	29.80	-0.58	36.0	6.20	Peak	205.00	100	Horizontal	Pass


A.2 Conducted Emission

Test Data and Plots

The GSM 850 MHz Test Mode


Note: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

A.2.1 L Phase

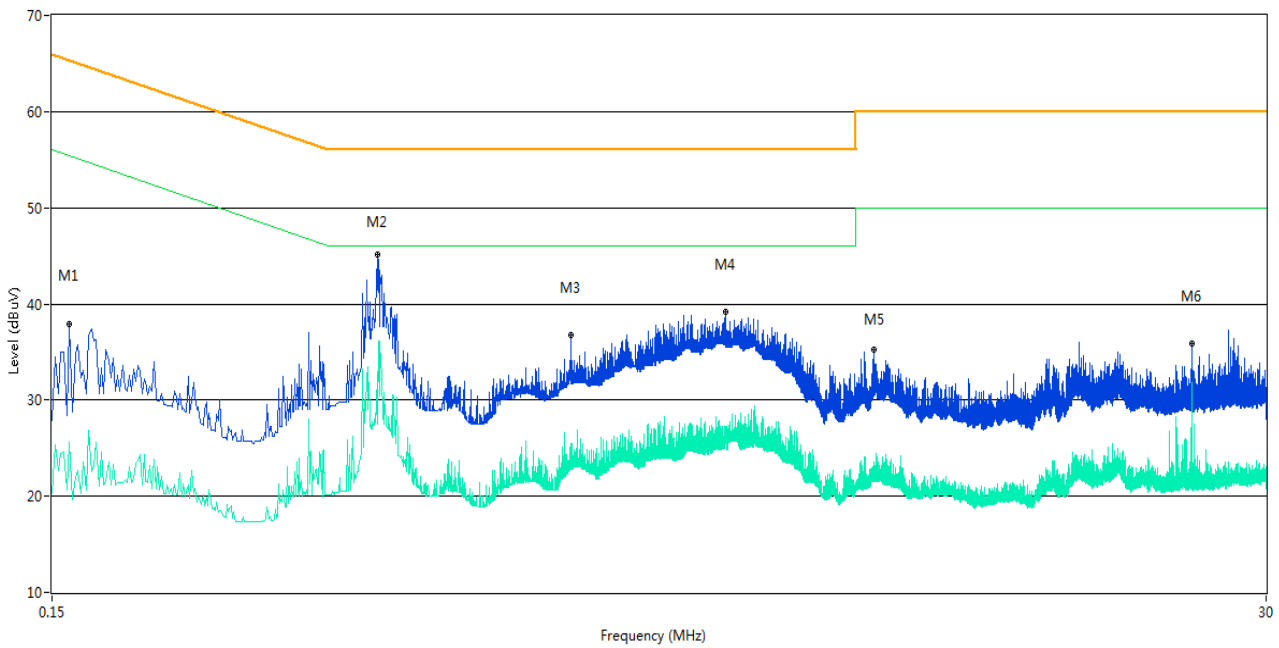

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.162	37.9	9.85	65.4	27.50	Peak	L Line	Pass
1**	0.162	25.6	9.85	55.4	29.80	AV	L Line	Pass
2	0.620	45.2	11.05	56.0	10.80	Peak	L Line	Pass
2**	0.620	32.9	11.05	46.0	13.10	AV	L Line	Pass
3	1.444	36.7	10.02	56.0	19.30	Peak	L Line	Pass
3**	1.444	25.5	10.02	46.0	20.50	AV	L Line	Pass
4	2.842	39.2	10.69	56.0	16.80	Peak	L Line	Pass
4**	2.842	26.8	10.69	46.0	19.20	AV	L Line	Pass
5	5.410	35.2	10.24	60.0	24.80	Peak	L Line	Pass
5**	5.410	22.5	10.24	50.0	27.50	AV	L Line	Pass
6	21.660	35.8	11.00	60.0	24.20	Peak	L Line	Pass
6**	21.660	31.8	11.00	50.0	18.20	AV	L Line	Pass

A.2.2 N Phase

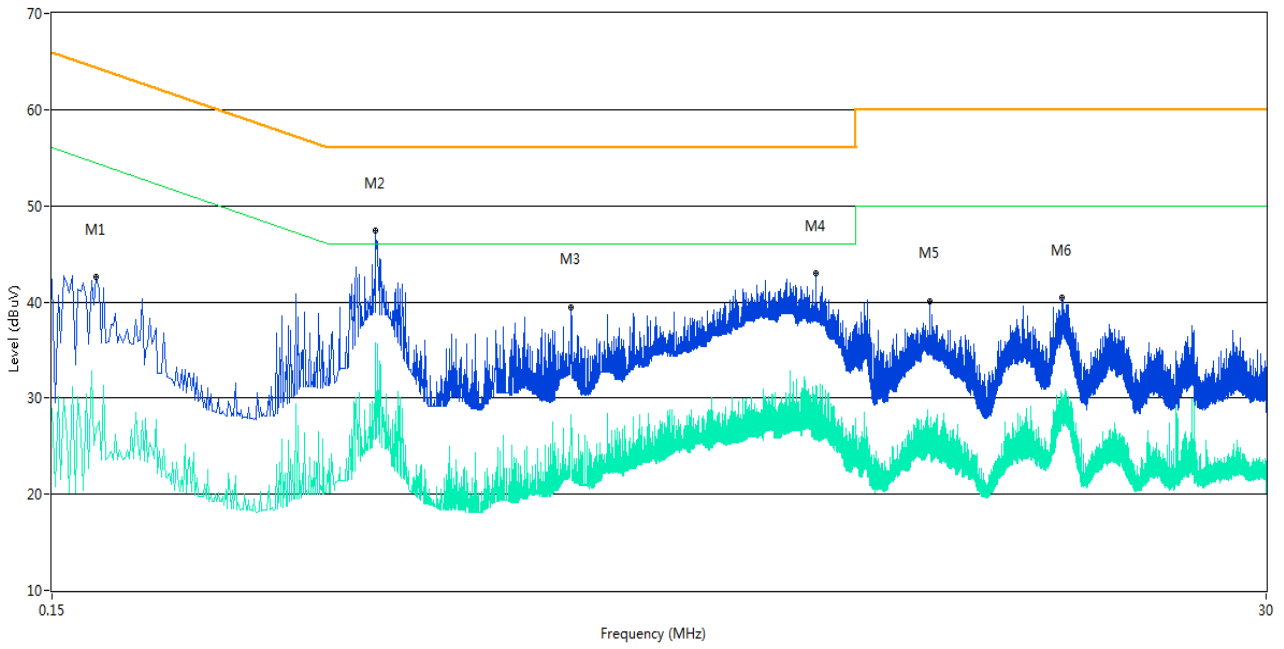


No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.182	42.6	10.46	64.4	21.80	Peak	N Line	Pass
1**	0.182	26.7	10.46	54.4	27.70	AV	N Line	Pass
2	0.616	47.4	11.40	56.0	8.60	Peak	N Line	Pass
2**	0.616	35.8	11.40	46.0	10.20	AV	N Line	Pass
3	1.444	39.5	10.02	56.0	16.50	Peak	N Line	Pass
3**	1.444	25.4	10.02	46.0	20.60	AV	N Line	Pass
4	4.204	43.0	10.59	56.0	13.00	Peak	N Line	Pass
4**	4.204	29.2	10.59	46.0	16.80	AV	N Line	Pass
5	6.914	40.0	9.99	60.0	20.00	Peak	N Line	Pass
5**	6.914	25.8	9.99	50.0	24.20	AV	N Line	Pass
6	12.316	40.5	10.74	60.0	19.50	Peak	N Line	Pass
6**	12.316	28.6	10.74	50.0	21.40	AV	N Line	Pass

Test Data and Plots

The USB Test Mode


A.2.3 L Phase

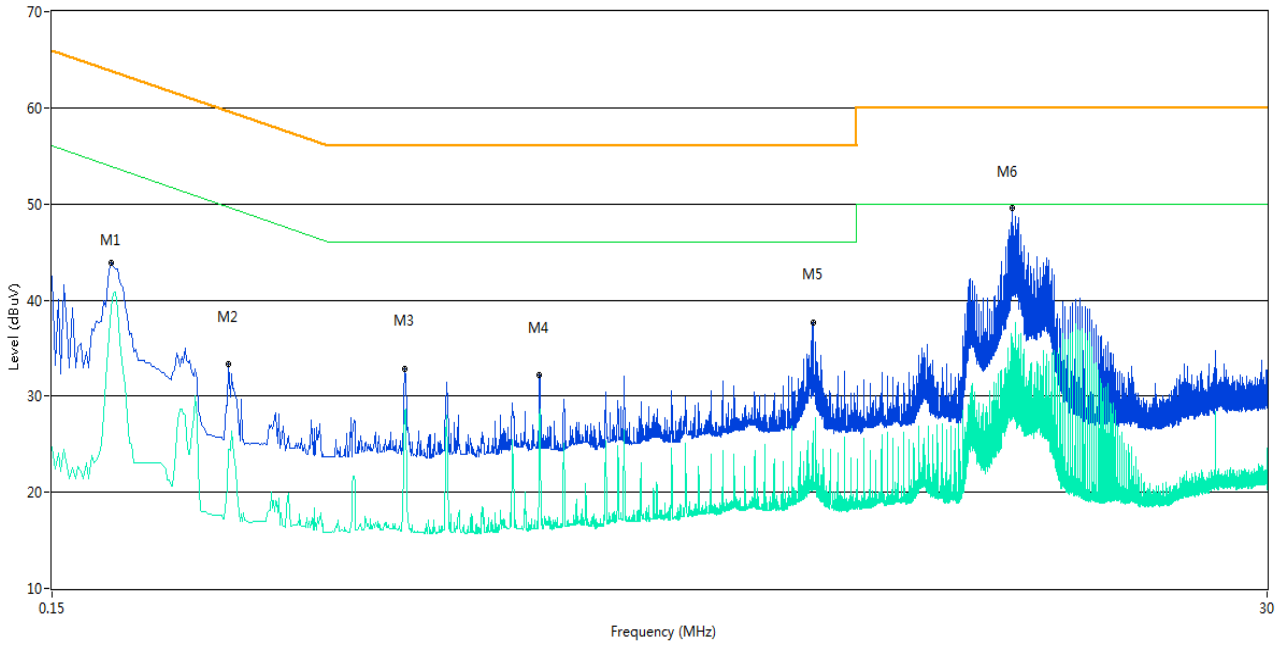

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.194	43.9	9.43	63.9	20.00	Peak	L Line	Pass
1**	0.194	39.2	9.43	53.9	14.70	AV	L Line	Pass
2	0.324	33.3	11.21	59.6	26.30	Peak	L Line	Pass
2**	0.324	24.4	11.21	49.6	25.20	AV	L Line	Pass
3	0.698	32.9	9.53	56.0	23.10	Peak	L Line	Pass
3**	0.698	28.5	9.53	46.0	17.50	AV	L Line	Pass
4	1.256	32.2	10.26	56.0	23.80	Peak	L Line	Pass
4**	1.256	27.8	10.26	46.0	18.20	AV	L Line	Pass
5	4.142	37.7	10.18	56.0	18.30	Peak	L Line	Pass
5**	4.142	26.3	10.18	46.0	19.70	AV	L Line	Pass
6	9.852	49.6	10.30	60.0	10.40	Peak	L Line	Pass
6**	9.852	34.8	10.30	50.0	15.20	AV	L Line	Pass

A.2.4 N Phase

CE Test case_FCC_CE_FCC PART 15_Class B

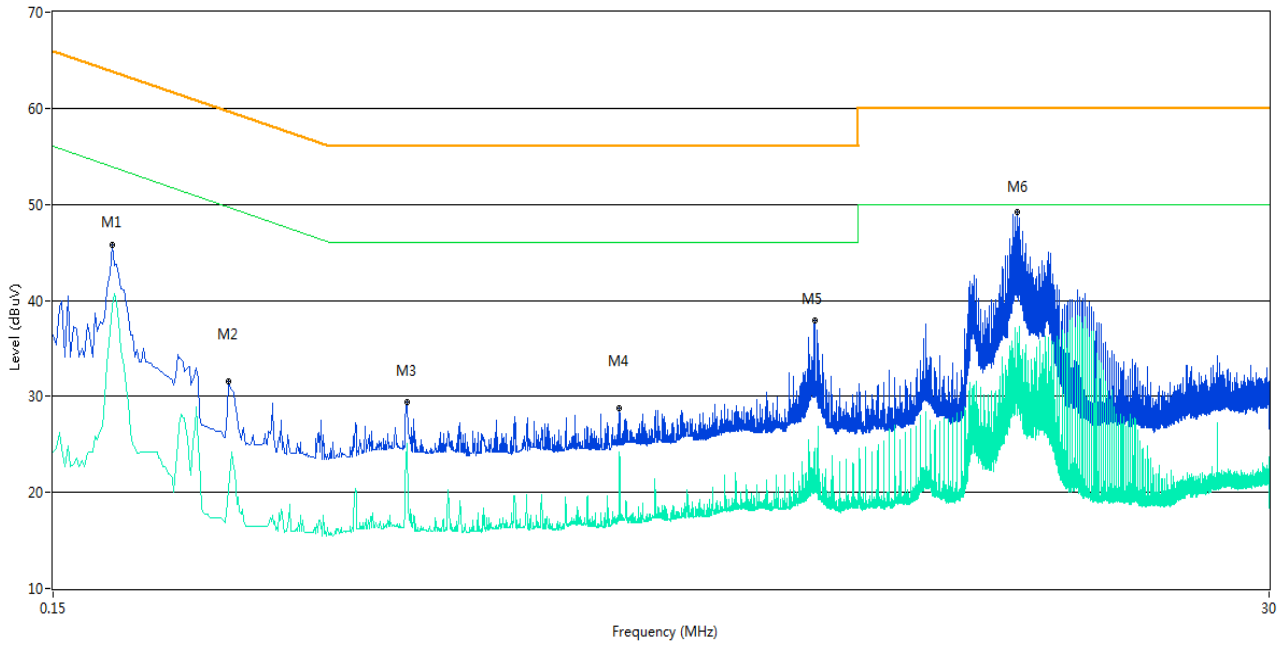

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.194	45.8	9.43	63.9	18.10	Peak	N Line	Pass
1**	0.194	39.5	9.43	53.9	14.40	AV	N Line	Pass
2	0.322	31.6	10.67	59.7	28.10	Peak	N Line	Pass
2**	0.322	20.3	10.67	49.7	29.40	AV	N Line	Pass
3	0.700	29.5	9.66	56.0	26.50	Peak	N Line	Pass
3**	0.700	25.1	9.66	46.0	20.90	AV	N Line	Pass
4	1.770	28.7	10.17	56.0	27.30	Peak	N Line	Pass
4**	1.770	24.2	10.17	46.0	21.80	AV	N Line	Pass
5	4.138	37.9	10.02	56.0	18.10	Peak	N Line	Pass
5**	4.138	24.6	10.02	46.0	21.40	AV	N Line	Pass
6	9.998	49.2	10.32	60.0	10.80	Peak	N Line	Pass
6**	9.998	36.6	10.32	50.0	13.40	AV	N Line	Pass

ANNEX B TEST SETUP PHOTOS

Please refer the document "BL-SZ1730238-AE.PDF".

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document "BL-SZ1730238-AW.PDF".

ANNEX D EUT INTERNAL PHOTOS

Please refer the document "BL-SZ1730238-AI.PDF".

--END OF REPORT--