NOTES:

- 1. DESCRIPTION: SERIALIZED BAR CODE LABEL...
- 2. MATERIAL: 2 MIL POLYMIDE, TYPE TS866.
- DIGITAL INKING SYSTEM FOR TEXT & BAR CODE TO BE PERMANENT BLACK, U.V. RESISTANT.
- ARTWORK LAYOUT TO BE LOCATED AS SHOWN, AND TO BE APPROVED BY HUNT ENGINEERING.

10 DIGIT SERIAL NO. TO BE IMPRINTED IN HUMAN READABLE FORM BELOW THE SAME INFORMATION IN CODE 128C BAR CODE AS SHOWN. THE CODE 128 CONSISTS OF A 2 DIGIT ERT TYPE (05) FOLLOWED BY AN 8 DIGIT I.D. S/N WITH NO SPACES. (BARCODE HEIGHT TO BE .150MIN). THE BAR CODE CAN RUN OFF THE BOTTOM OF THE LABEL.


FCC/IC I.D. NUMBERS TO BE LISTED ACROSS THE TOP OF THE LABEL.

- HUNT OR IT'S CONTRACTORS WILL PROVIDE SERIAL NUMBERS WITH EACH PURCHASE.
- 8. HUNT PRODUCT NAME AND REV LISTED AS SHOWN.
- LABEL MANUFACTURER: WHEN EACH PURCHASE ORDER IS COMPLETED, PROVIDE THE VERIFIED RANGE & DATE COMPLETED TO HUNT TECHNOLOGIES MANUFACTURING ENGINEER OR PURCHASING.
 - \(\) THE REVISION ALPHA CHARACTER IS THE PRODUCT TRACKING I.D. AND SHALL BE AS SHOWN ON THE LABEL IMAGE.
 - THE "/VXX" REFLECTS THE VERSION OF THE FIRMWARE LOADED ONTO THE I.C. THIS NUMERIC VERSION MUST MATCH THE LATEST VERSION FOR THE FIRM-00075.
- 12. NARROW BAR IS 10 MIL.

 REVISIONS

 DWG REV.
 ECO# IMRF#
 SFTW
 DESCRIPTION
 DRAFTER
 REVISION DATE
 APPROVED DATE

 01
 3362
 SLDW
 RELEASE FOR QUOTE / PROTOTYPE

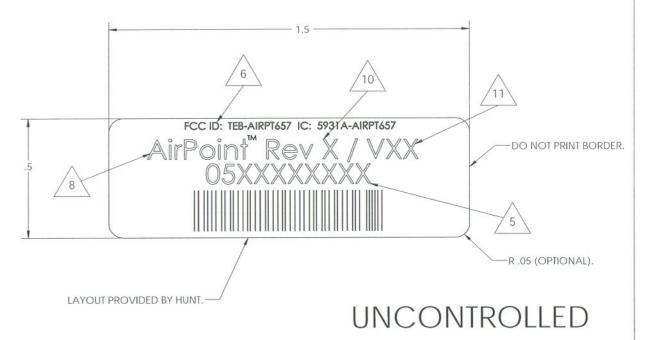

CHECKED BY DATED DO NOT SCALE DRAWING TECHNOLOGIES, INC. UNLESS OTHERWISE SPECIFIED: INITIATOR PEQUOT LAKES, MN 56472 DIMENSIONS ARE IN INCHES TOLERENCES ON: TITLE: DECIMAL FRACTION ANGLE QUALITY ASSURANCE DATED: LABEL, 0657 AirPoint BAR CODE INTERIOR 2 PL ± .03 ± 1/64 ±1* 3 PL + .15 PART NO. MANUFACTURING: LABL-00192_01 MUST BE FREE FROM FLASH AND BURRS. BREAK ALL SHARP EDGES. SCALE: SI7F SHEET DWG. NO. DATED: DATED: () DENOTES REFERENCE ONLY. S. O'BRYAN | 01/18/06 LABL-00192 01 01/18/06 В NONE 1 OF 1

NOTICE: THIS DOCUMENT CONTAINS INFORMATION PROPRIETARY TO HUNT TECHNOLOGIES INC. ANY USE OR DISCLOSURE WITHOUT WRITTEN PERMISSION IS PROHIBITED.