


NOTES:

1. DESCRIPTION: SERIALIZED BAR CODE LABEL..
2. MATERIAL: 2 MIL POLYIMIDE, TYPE TS866.
3. DIGITAL INKING SYSTEM FOR TEXT & BAR CODE TO BE PERMANENT BLACK, U.V. RESISTANT.
4. ARTWORK LAYOUT TO BE LOCATED AS SHOWN, AND TO BE APPROVED BY HUNT ENGINEERING.
5. 10 DIGIT SERIAL NO. TO BE IMPRINTED IN HUMAN READABLE FORM BELOW THE SAME INFORMATION IN CODE 128C OR CODE 39 BAR CODE AS SHOWN. THE CODE 128 OR CODE 39 CONSISTS OF A 2 DIGIT ERT TYPE (05) FOLLOWED BY AN 8 DIGIT I.D. S/N WITH NO SPACES. (BARCODE HEIGHT TO BE .150MIN). THE BAR CODE CAN RUN OFF THE BOTTOM OF THE LABEL.
6. FCC I.D. NUMBER TO BE LISTED ACROSS THE TOP OF THE LABEL.
7. HUNT PRODUCT NAME AND REV LISTED AS SHOWN.
8. LABEL MANUFACTURER: WHEN EACH PURCHASE ORDER IS COMPLETED, PROVIDE THE VERIFIED RANGE & DATE COMPLETED TO HUNT TECHNOLOGIES MANUFACTURING ENGINEER OR PURCHASING.
9. NARROW BAR IS 10 MIL.
10. THIS LABEL SHALL BE PRINTED BY LANDIS + GYR, AND GET PLACED ON THE OUTSIDE OF THE METER. I.D. WILL MATCH THE I.D. OF THE AIRPOINT MODULE THAT IS INSTALLED WITHIN.

REVISIONS						
DWG REV.	ECO# IMRF#	SFTW	DESCRIPTION	DRAFTER	REVISION DATE	APPROVED DATE
01	3899	SLDW	RELEASE FOR QUOTE/PROTOTYPE	-	-	-

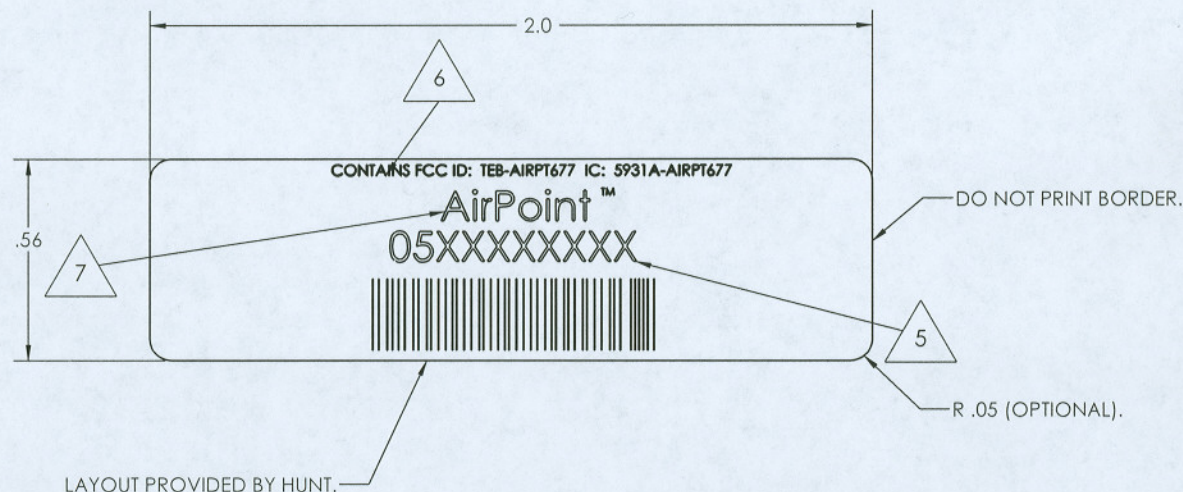

NOTICE:  
THIS DOCUMENT CONTAINS INFORMATION  
PROPRIETARY TO HUNT TECHNOLOGIES INC.  
ANY USE OR DISCLOSURE WITHOUT WRITTEN  
PERMISSION IS PROHIBITED.

DO NOT SCALE DRAWING		CHECKED BY:	DATED:	COMPANY:		
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES ON: DECIMAL FRACTION ANGLE 2 PL ± .03 ± 1/64 ± 1° 3 PL ± .15		INITIATOR:	DATED:	HUNT TECHNOLOGIES, INC.		
MUST BE FREE FROM FLASH AND BURRS. BREAK ALL SHARP EDGES. ( ) DENOTES REFERENCE ONLY.		A. KETTLEWELL	11/06/06	PEQUOT LAKES, MN 56472		
		QUALITY ASSURANCE:	DATED:	TITLE:		
		B. HEITKOTTER	11/06/06	LABEL, 0677 HIGH POWER AIRPOINT FOCUS EXTERIOR		
		MANUFACTURING:	DATED:	PART NO.		
		A. KETTLEWELL	11/06/06	LABL-00230		
		DRAWN BY:	DATED:	DWG. NO.	DATED:	SCALE:
		M. DAVIS	11/06/06	LABL-00230	11/06/06	NONE
					SIZE:	SHEET:
					B	1 OF 1