


## NOTES:

1. DESCRIPTION: SERIALIZED BAR CODE LABEL..
2. MATERIAL: 2 MIL POLYIMIDE, TYPE 15866.
3. DIGITAL INKING SYSTEM FOR TEXT & BAR CODE TO BE PERMANENT BLACK, UV, RESISTANT.
4. AIRWORK LAYOUT TO BE LOCATED AS SHOWN, AND TO BE APPROVED BY HUNT ENGINEERING.
5. 10 DIGIT SERIAL NO. TO BE IMPRINTED IN HUMAN READABLE FORM BELOW THE SAME INFORMATION IN CODE 128C OR CODE 39 BAR CODE AS SHOWN. THE CODE 128 OR CODE 39 CONSISTS OF A 2 DIGIT ERT TYPE 091 FOLLOWED BY AN 8 DIGIT I.D. SYN WITH NO SPACES. (BARCODE HEIGHT TO BE .150MIN). THE BAR CODE CAN RUN OFF THE BOTTOM OF THE LABEL.
6. FCC I.D. NUMBER TO BE LISTED ACROSS THE TOP OF THE LABEL.
7. HUNT PRODUCT NAME AND REV LISTED AS SHOWN.
8. LABEL MANUFACTURER: WHEN EACH PURCHASE ORDER IS COMPLETED, PROVIDE THE VERIFIED RANGE & DATE COMPLETED TO HUNT TECHNOLOGIES MANUFACTURING ENGINEER OR PURCHASING.
9. NARROW BAR IS 10 MIL.
10. THIS LABEL SHALL BE PRINTED BY LANDIS + GYR, AND GET PLACED ON THE OUTSIDE OF THE METER. I.D. WILL MATCH THE I.D. OF THE AIRPOINT MODULE THAT IS INSTALLED WITHIN.

## REVISIONS

DWG REV	ECOA NUMBER	STW	DESCRIPTION	DRAWN	REVISION DATE	APPROVED DATE	APPROVED
A	4424	SLDW	RELEASE FOR PRODUCTION	-	-	-	-

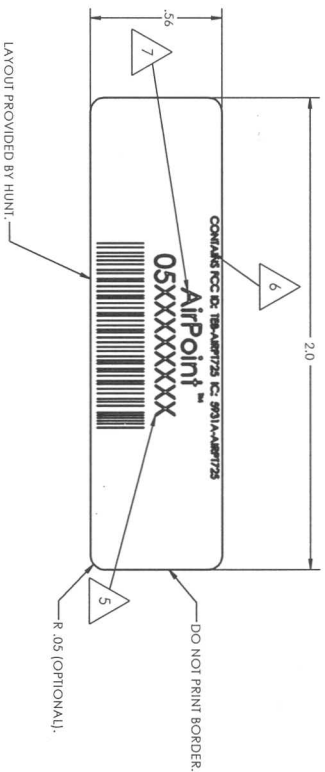

NOTICE:  
THIS DOCUMENT CONTAINS INFORMATION  
PROPRIETARY TO HUNT TECHNOLOGIES, LLC.  
ANY USE OR DISCLOSURE WITHOUT WRITTEN  
PERMISSION IS PROHIBITED.

DO NOT SCALE DRAWING		CHECKED BY:	DATE:	COMPANY:			
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES DIMENSIONS IN PARENTHESES ARE IN MILLIMETERS		DRAWN:	DATE:	HUNT TECHNOLOGIES, LLC.			
DECIMAL FRACTION ANGLE 2 PL ± .01 ± 1/64 ± 1°		QUALITY ASSURANCE:	DATE:	PEQUOT LAKES, MN 56472			
TYPICAL KEY AND NUMBER BREAK ALL SHARP EDGES		MANUFACTURING:	DATE:	TITLE: LABEL 0725 HIGH POWER AIRPOINT FOCUS EXTERIOR			
MATERIAL REFERENCE ONLY (1) DENOTES REFERENCE ONLY.		DRAWN BY:	DATE:	PART NO.	PART NO.		
		S. C. BRYAN	07/10/07	DWG. NO.	LABL-00244		
				SCALE:	SIZE: 8		
					SHEET: 1 OF 1		