

Signature

CONDUCTED EMISSIONS



Test Report #: WC703962 Run 9 Test Area: LTS

EUT Model #: Airpoint Date: 6/8/2007

EUT Serial #: 43106127 EUT Power: 240 V 60 Hz Temperature: 23.0 °C

Test Method: FCC B Air Pressure: 98.0 kPa

Customer: Hunt Technologies Rel. Humidity: 38.0 %

EUT Description: LG hipower endpoint

Notes: _____

Data File Name: 3962.dat

Page: 2 of 4

Measurement summary for limit1: EN55022 B Qp (Qp)

FREQ	LEVEL (dBuV)	CABLE / ANT / PREAMP / ATTEN (dB)	FINAL (dBuV / m)	EUT Lead	DELTA1 EN55022 B Qp
400.0 kHz	28.0 Qp	0.16 / 0.1 / 0.0 / 0.0	28.26	L1	-29.59
440.0 kHz	23.0 Qp	0.17 / 0.1 / 0.0 / 0.0	23.27	L1	-33.79
315.0 kHz	25.28 Qp	0.15 / 0.1 / 0.0 / 0.0	25.53	L2	-34.31
280.0 kHz	25.5 Qp	0.14 / 0.1 / 0.0 / 0.0	25.74	L2	-35.08
24.695 MHz	15.44 Qp	1.19 / 0.68 / 0.0 / 0.0	17.3	L1	-42.7
2.685 MHz	5.34 Qp	0.41 / 0.0 / 0.0 / 0.0	5.75	L2	-50.25

Tested by: Greg Jakubowski _____

Printed Signature

Reviewed
by: _____

Printed Signature

CONDUCTED EMISSIONS



Test Report #: WC703962 Run 9 Test Area: LTS

EUT Model #: Airpoint Date: 6/8/2007

EUT Serial #: 43106127 EUT Power: 240 V 60 Hz Temperature: 23.0 °C

Test Method: FCC B Air Pressure: 98.0 kPa

Customer: Hunt Technologies Rel. Humidity: 38.0 %

EUT Description: LG hipower endpoint

Notes: _____

Data File Name: 3962.dat

Page: 3 of 4

Measurement summary for limit2: EN55022 B Avg (Av)

FREQ	LEVEL (dBuV)	CABLE / ANT / PREAMP / ATTEN (dB)	FINAL (dBuV / m)	EUT Lead	DELTA2 EN55022 B Avg
24.695 MHz	9.14 Av	1.19 / 0.68 / 0.0 / 0.0	11.0	L1	-39.0
400.0 kHz	0.46 Av	0.16 / 0.1 / 0.0 / 0.0	0.72	L2	-47.13
440.0 kHz	-2.71 Av	0.17 / 0.1 / 0.0 / 0.0	-2.44	L1	-49.5
280.0 kHz	-1.58 Av	0.14 / 0.1 / 0.0 / 0.0	-1.34	L2	-52.16
315.0 kHz	-2.65 Av	0.15 / 0.1 / 0.0 / 0.0	-2.4	L2	-52.24
2.685 MHz	-7.13 Av	0.41 / 0.0 / 0.0 / 0.0	-6.72	L2	-52.72

Tested by: Greg Jakubowski _____

Printed Signature

Reviewed by: _____

Printed Signature

CONDUCTED EMISSIONS



Test Report #: WC703962 Run 9 Test Area: LTS

EUT Model #: Airpoint Date: 6/8/2007

EUT Serial #: 43106127 EUT Power: 240 V 60 Hz Temperature: 23.0 °C

Test Method: FCC B Air Pressure: 98.0 kPa

Customer: Hunt Technologies Rel. Humidity: 38.0 %


EUT Description: LG hipower endpoint

Notes: _____

Data File Name: 3962.dat

Page: 4 of 4

Graph:

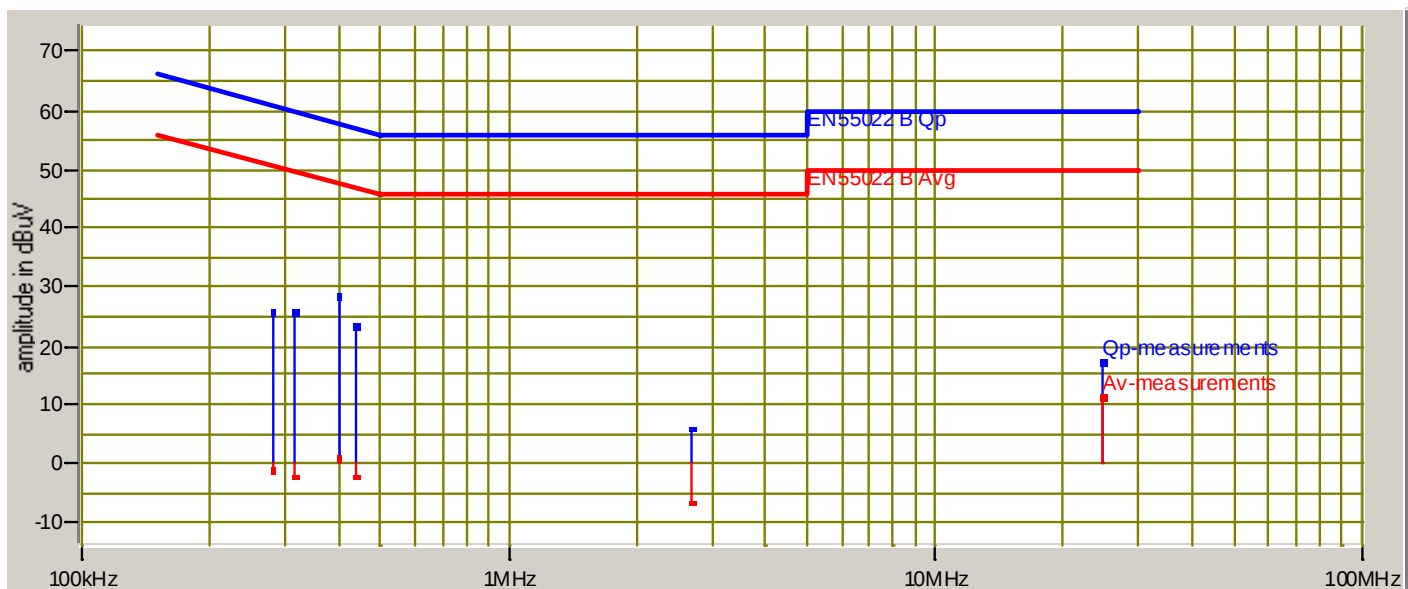

Tested by: Greg Jakubowski _____

Printed Signature

Reviewed by: _____

Printed Signature