


NOTES:

1. MATERIAL: .002 THICK POLYIMIDE WITH 3M #400 OR #7921 ACRYLIC ADHESIVE.
A. BACKING: SILICONE RELEASE LINER.
B. FACE COLOR: WHITE WITH BLACK INK.
2. ENVIRONMENTAL:
A. TEMPERATURE RANGE: -40°C TO +85°C.
B. ADHESIVE, MATERIAL AND INK SHALL BE RESISTANCE TO UV DEGRADATION.
C. LIGHT AND HUMIDITY AS SPECIFIED IN UL 969-OUTDOOR EXPOSURE TEST.
3. 10 DIGIT SERIAL # TO BE IMPRINTED IN HUMAN READABLE FORM.

REVISIONS						
DWG REV.	ECO# IMRF#	SFTW	DESCRIPTION	DRAFTER	REVISION DATE	APPROVED DATE
01	4192	SLDW	RELEASE FOR QUOTE / PROTOTYPE	-	-	-

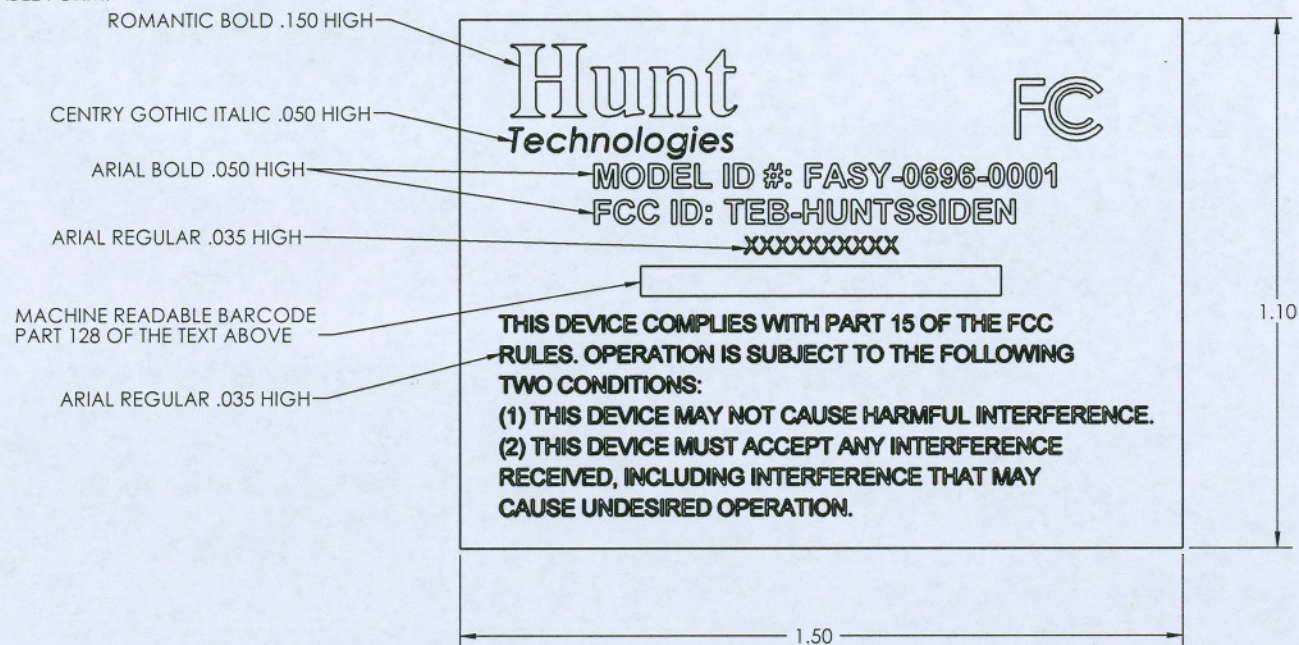

NOTICE:
THIS DOCUMENT CONTAINS INFORMATION
PROPRIETARY TO HUNT TECHNOLOGIES INC.
ANY USE OR DISCLOSURE WITHOUT WRITTEN
PERMISSION IS PROHIBITED.

DO NOT SCALE DRAWING	CHECKED BY:	DATED:	COMPANY:
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES ON: DECIMAL FRACTION ANGLE 2 PL ±.03 ± 1/64 ±1° 3 PL ±.015	INITIATOR: S. LESSER	DATED: 03/02/07	HUNT TECHNOLOGIES, INC. PEQUOT LAKES, MN 56472
MUST BE FREE FROM FLASH AND BURRS. BREAK ALL SHARP EDGES. () DENOTES REFERENCE ONLY.	QUALITY ASSURANCE:	DATED:	TITLE: LABEL, 0696 SS DATA COLLECTOR FCC IDEN
	MANUFACTURING:	DATED:	PART NO. LABL-00310
	DRAWN BY: S. O'BRYAN	DATED: 03/02/07	DWG. NO. LABL-00310
			DATED: 03/02/07
			SCALE: NONE
			SIZE: B
			SHEET: 1 OF 1

UNCONTROLLED