



FCC PART 15 SUBPART C

TEST AND MEASUREMENT REPORT

For

Everex Communications, Inc.

1045 Mission Court,
Fremont, CA 94539, USA

**FCC ID: TF7WX-31-1000
Model: WC-31**

Report Type: Original Report	Product Type: 2.4 GHz 802.15.4 I/O Wireless Controller
Prepared By: <u>Bo Li</u> 	
Report Number: <u>R1301211-247</u>	
Report Date: <u>2013-04-12</u> Quinn Jiang 	
Reviewed By: <u>Test Engineer</u>	
Bay Area Compliance Laboratories Corp. 1274 Anvilwood Avenue, Sunnyvale, CA 94089, USA Tel: (408) 732-9162 Fax: (408) 732-9164	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by A2LA*, NIST, or any agency of the Federal Government.

* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*” (Rev.2)

TABLE OF CONTENTS

1 General Description.....	5
1.1 Product Description for Equipment Under Test (EUT)	5
1.2 Mechanical Description of EUT	5
1.3 Objective.....	5
1.4 Related Submittal(s)/Grant(s)	5
1.5 Test Methodology	5
1.6 Measurement Uncertainty.....	5
1.7 Test Facility	6
2 System Test Configuration.....	7
2.1 Justification.....	7
2.2 EUT Exercise Software.....	7
2.3 Special Equipment	7
2.4 Equipment Modifications.....	7
2.5 Local Support Equipment	7
2.6 EUT Internal Configuration Details.....	7
2.7 Interface Ports and Cables	7
3 Summary of Test Results	8
4 FCC §15.247 (i) & §2.1091– RF Exposure.....	9
4.1 Applicable Standard.....	9
4.2 MPE Prediction.....	9
4.3 MPE Results	9
5 FCC §15.203 – Antenna Requirements.....	10
5.1 Applicable Standard.....	10
5.2 Antenna List.....	10
6 FCC §15.207 - AC Power Line Conducted Emissions.....	11
6.1 Applicable Standard.....	11
6.2 Test Setup	11
6.3 Test Equipment List and Details.....	11
6.4 Test Setup Block Diagram.....	12
6.5 Test Procedure	12
6.6 Test Environmental Conditions	12
6.7 Summary of Test Results	13
6.8 Conducted Emissions Test Plots and Data.....	13
7 FCC §2.1051, §15.247(d) – Spurious Emissions at Antenna Terminals.....	16
7.1 Applicable Standard.....	16
7.2 Measurement Procedure.....	16
7.3 Test Equipment List and Details.....	16
7.4 Test Environmental Conditions	16
7.5 Test Results.....	16
8 FCC §15.205, §15.209 & §15.247(d) – Spurious Radiated Emissions	20
8.1 Applicable Standard.....	20
8.2 Test Setup	21
8.3 Test Procedure	21
8.4 Corrected Amplitude & Margin Calculation.....	22
8.5 Test Equipment List and Details.....	22
8.6 Test Environmental Conditions	22
8.7 Summary of Test Results	23
8.8 Radiated Emissions Test Data and Plots.....	24
9 FCC §15.247(a)(2) – 6 dB & 99% Emission Bandwidth	29
9.1 Applicable Standard.....	29

9.2	Measurement Procedure.....	29
9.3	Test Equipment List and Details.....	29
9.4	Test Environmental Conditions	29
9.5	Test Results.....	30
10	FCC §15.247(b) – Peak Output Power Measurement	32
10.1	Applicable Standard.....	32
10.2	Measurement Procedure.....	32
10.3	Test Equipment List and Details.....	32
10.4	Test Environmental Conditions	32
10.5	Test Results.....	33
11	FCC §15.247(d) – 100 kHz Bandwidth of Band Edges.....	35
11.1	Applicable Standard.....	35
11.2	Measurement Procedure.....	35
11.3	Test Equipment List and Details.....	35
11.4	Test Environmental Conditions	35
11.5	Test Results.....	35
12	FCC §15.247(e) – Power Spectral Density.....	37
12.1	Applicable Standard.....	37
12.2	Measurement Procedure.....	37
12.3	Test Equipment List and Details.....	37
12.4	Test Environmental Conditions	37
12.5	Test Results.....	38
13	Exhibit A – FCC Equipment Labeling Requirements.....	40
13.1	FCC ID Label Requirements	40
13.2	FCC ID label Contents and Location.....	40
14	Exhibit B – Test Setup Photographs	41
14.1	AC Line Conducted Emissions - Front View	41
14.2	AC Line Conducted Emissions Side View	41
14.3	Radiated Emission below 1 GHz Front View at 3 Meters	42
14.4	Radiated Emission below 1 GHz Rear View at 3 Meters	42
14.5	Radiated Emission above 1 GHz Front View at 3 Meters	43
14.6	Radiated Emission above 1GHz Rear View at 3 Meters	43
15	Exhibit C – EUT Photographs.....	44
15.1	EUT – Top View.....	44
15.2	EUT – Bottom Side View	44
15.3	EUT – Front View	45
15.4	EUT – Rear Side View	45
15.5	EUT – Left Side View	46
15.6	EUT – Right Side View	46
15.7	EUT – 24 VAC Power Transformer (Supporting Equipment).....	47
15.8	EUT – Thermostat (Supporting Equipment).....	47
15.9	EUT – Main PCB Front View	48
15.10	EUT – Main PCB Back View.....	48

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	R1301211-247	Original Report	2013-04-12

1 General Description

1.1 Product Description for Equipment Under Test (EUT)

This test and measurement report was prepared on behalf of *Everex Communications, Inc.* and their product *FCC ID: TF7WX-31-1000*, model: *WC-31* which will henceforth be referred to as the EUT (Equipment Under Testing). The EUT is 2.4 GHz 802.15.4 I/O Wireless Controller.

1.2 Mechanical Description of EUT

The EUT measures approximately 96 cm (L) x 35 cm (W) x 73 cm (H) and weighs 0.08kg.

The test data gathered are from typical production sample provided by the manufacturer, serial number: 00063F00000104CB (assigned by the manufacturer.)

1.3 Objective

This report is prepared on behalf of *Everex Communication, Inc.* in accordance with Part 2, Subpart J, and Part 15, Subparts B and C of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15.247 for Output Power, Antenna Requirements, 6 dB Bandwidth, and power spectral density, 100 kHz Bandwidth of Band Edges Measurement, Spurious Emissions, Conducted and Radiated Spurious Emissions.

1.4 Related Submittal(s)/Grant(s)

N/A

1.5 Test Methodology

All measurements contained in this report were conducted in accordance with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz and ANSI C63.10-2009, American National Standard for Testing Unlicensed Wireless Devices.

1.6 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR16-4-2:2003, The Treatment of Uncertainty in EMC Measurements, the values ranging from ± 2.0 dB for Conducted Emissions tests and ± 4.0 dB for Radiated Emissions tests are the most accurate estimates pertaining to uncertainty of EMC measurements at BACL Corp.

1.7 Test Facility

The test site used by BACL Corp. to collect radiated and conducted emissions measurement data is located at its facility in Sunnyvale, California, USA.

The test site at BACL Corp. has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997, and Article 8 of the VCCI regulations on December 25, 1997. The test site also complies with the test methods and procedures set forth in CISPR 22:2008 §10.4 for measurements below 1 GHz and §10.6 for measurements above 1 GHz as well as ANSI C63.4-2003, ANSI C63.4-2009, TIA/EIA-603 & CISPR 24:2010.

The Federal Communications Commission and Voluntary Control Council for Interference have the reports on file and they are listed under FCC registration number: 90464 and VCCI Registration No.: A-0027. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL Corp. is an American Association for laboratory Accreditation (A2LA) accredited laboratory (Lab Code 3297-02). The current scope of accreditations can be found at

<http://www.a2la.org/scopepdf/3297-02.pdf?CFID=1132286&CFTOKEN=e42a3240dac3f6ba-6DE17DCB-1851-9E57-477422F667031258&jsessionid=8430d44f1f47cf2996124343c704b367816b>

2 System Test Configuration

2.1 Justification

The EUT was configured for testing according to ANSI C63.4-2009.

The EUT was tested in a testing mode to represent worst-case results during the final qualification test.

The worst-case data rates are determined to be as follows for each mode based upon investigation by measuring the average power, peak power and PPSD across all data rates bandwidths, and modulations.

2.2 EUT Exercise Software

The test utility used was WC31sm-fcc.hex was provided by *Everex Communications, Inc.*, and was verified by *Bo Li* to comply with the standard requirements being tested against.

2.3 Special Equipment

There were no special accessories were required, included, or intended for use with EUT during these tests.

2.4 Equipment Modifications

No modifications were made to the EUT.

2.5 Local Support Equipment

Manufacturer	Description	Model	Serial Number
-	Thermostat	-	-

2.6 EUT Internal Configuration Details

Manufacturer	Description	Model	Serial Number
Everex	PCB board	PWB-1273A1-0000 Rev.A1	-

2.7 Interface Ports and Cables

Cable Description	Length (m)	To	From
RF Cable	<1.0	PSA	EUT

3 Summary of Test Results

Results reported relate only to the product tested.

FCC Rules	Description of Test	Results
FCC §15.247(i), §2.1091	RF Exposure	Compliant
FCC §15.203	Antenna Requirement	Compliant
FCC §15.207(a)	AC Line Conducted Emissions	Compliant
FCC §15.247 (d)	Spurious Emissions at Antenna Port	Compliant
FCC §15.209, §15.247 (d) FCC §15.205	Radiated Spurious Emissions Including Restricted Band	Compliant
FCC §15.247(a)(2)	6 dB Emission Bandwidth	Compliant
FCC §15.247(b)(3)	Maximum Peak Output Power	Compliant
FCC §15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
FCC §15.247(e)	Power Spectral Density	Compliant

4 FCC §15.247 (i) & §2.1091– RF Exposure

4.1 Applicable Standard

According to FCC §15.247(i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	* (100)	30
1.34-30	824/f	2.19/f	* (180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

4.2 MPE Prediction

Predication of MPE limit at a given distance, Equation from OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

4.3 MPE Results

Maximum peak output power at antenna input terminal (dBm):	17.92
Maximum peak output power at antenna input terminal (mW):	61.94
Prediction distance (cm):	20
Prediction frequency (MHz):	2440
Maximum Antenna Gain, typical (dBi):	3.5
Maximum Antenna Gain (numeric):	2.239
Power density of prediction frequency at 20.0 cm (mW/cm ²):	0.028
MPE limit for uncontrolled exposure at prediction frequency (mW/cm ²):	1.0

The device is compliant with the requirement MPE limit for uncontrolled exposure.

5 FCC §15.203 – Antenna Requirements

5.1 Applicable Standard

According to FCC §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to FCC §15.247 (b) (4), if transmitting antennas of directional gain greater than 6 dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.2 Antenna List

Frequency Range (MHz)	External/Internal/Integral	Antenna Type/Pattern	Antenna Gain (dBi) @ 2.4 GHz
2400	Integral	Dual PCB F antennae, Diversity	3.5

The antenna consists of non-standard (UFL) connectors with less 6 dBi gain; therefore, it complies with the antenna requirement.

6 FCC §15.207 - AC Power Line Conducted Emissions

6.1 Applicable Standard

Section 15.207 Conducted limits:

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

6.2 Test Setup

The measurement was performed at shield room, using the setup per ANSI C63.4-2003 measurement procedure. The specification used was FCC Part15.207 limits.

External I/O cables were draped along the edge of the test table and bundle when necessary.

The 24VAC power transformer of the unit was connected with LISN which provided 120 V / 60 Hz AC power.


6.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Rohde & Schwarz	EMI Test Receiver	ESCI 1166.5950K03	100044	2012-04-18	1 year
Solar Electronics	LISN	9252-R-24-BNC	511205	2012-06-25	1 year
TTE	Filter, High Pass	H9962-150K-50-21378	K7133	2012-05-30	1 year

Statement of Traceability: BACL Corp. attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

6.4 Test Setup Block Diagram

Conducted Emissions

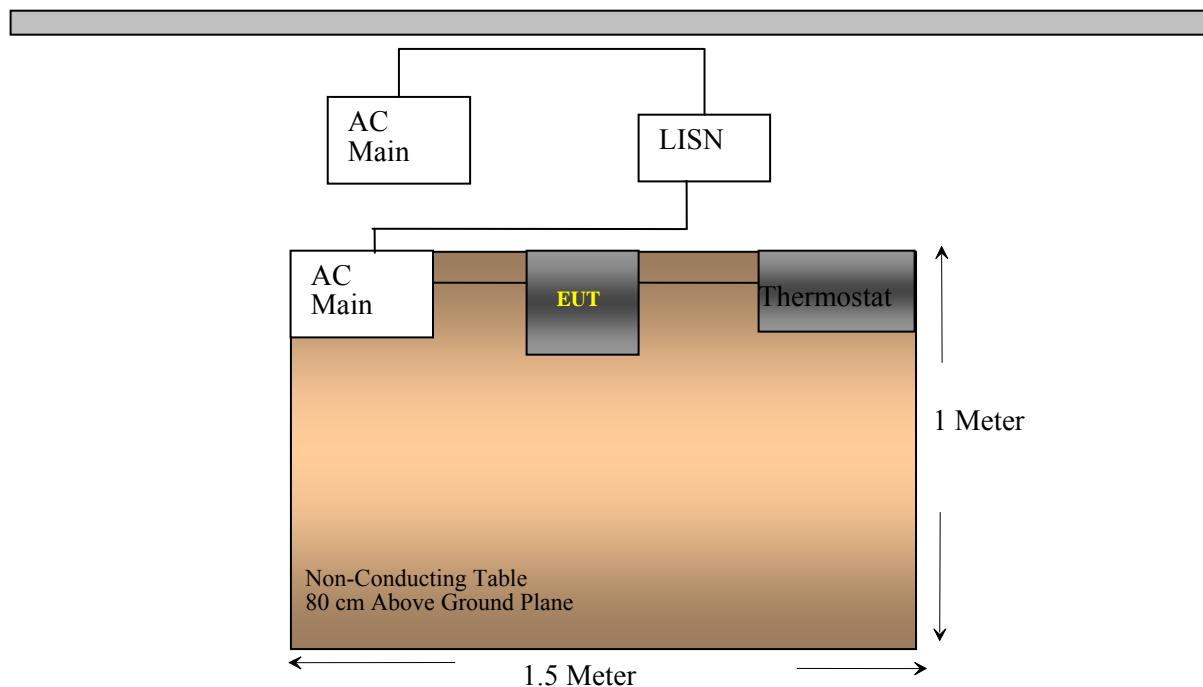

6.5 Test Procedure

During the conducted emissions test, the power cord of the EUT host system was connected to the mains outlet of the LISN-2.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the peak detection mode, quasi-peak and average. Quasi-Peak readings are distinguished with a "QP". Average readings are distinguished with an "Ave".

6.6 Test Environmental Conditions

Temperature:	22°C
Relative Humidity:	42%
ATM Pressure:	102kPa

The testing was performed by Bo Li on 2013-02-21 at 5 meter 3.


6.7 Summary of Test Results

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15C standard's conducted emissions limits, with the *worst* margin reading of:

Connection: 24VAC power transformer connected to 120 V/60 Hz AC			
Margin (dB)	Frequency (MHz)	Conductor Mode (Line/Neutral)	Range (MHz)
-13.94	0.369297	Neutral	0.15 to 30

6.8 Conducted Emissions Test Plots and Data


Please refer to the following plots and tables.

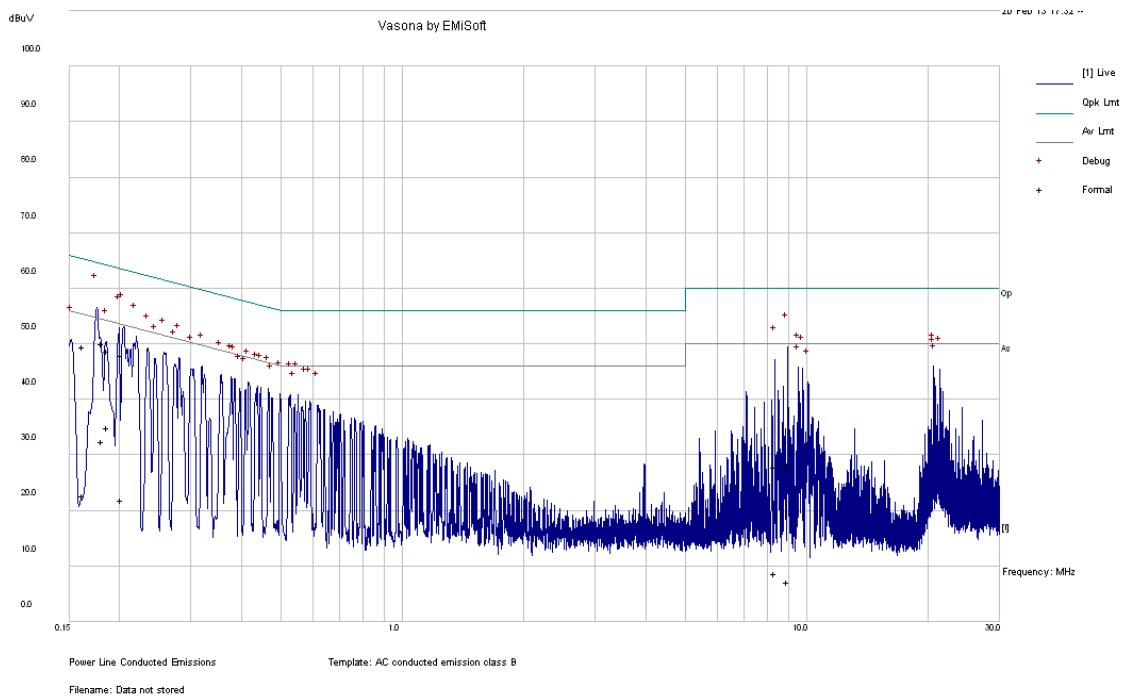Frequency: 2440 MHz (worst case)**120 V, 60 Hz – Line****Quasi-Peak Measurements**

Frequency (MHz)	Corrected Amplitude (dB μ V)	Conductor (Line/Neutral)	Limit (dB μ V)	Margin (dB)
0.181773	50.09	Line	64.4	-14.31
0.186798	48.77	Line	64.18	-15.41
0.20169	47.91	Line	63.54	-15.63
0.162195	49.46	Line	65.35	-15.90
8.959014	28.09	Line	60	-31.91
8.330494	27.94	Line	60	-32.06

Average Measurements

Frequency (MHz)	Corrected Amplitude (dB μ V)	Conductor (Line/Neutral)	Limit (dB μ V)	Margin (dB)
0.186798	34.97	Line	54.18	-19.21
0.181773	32.45	Line	54.4	-21.96
0.20169	21.91	Line	53.54	-31.63
0.162195	22.68	Line	55.35	-32.67
8.330494	8.74	Line	50	-41.26
8.959014	7.13	Line	50	-42.87

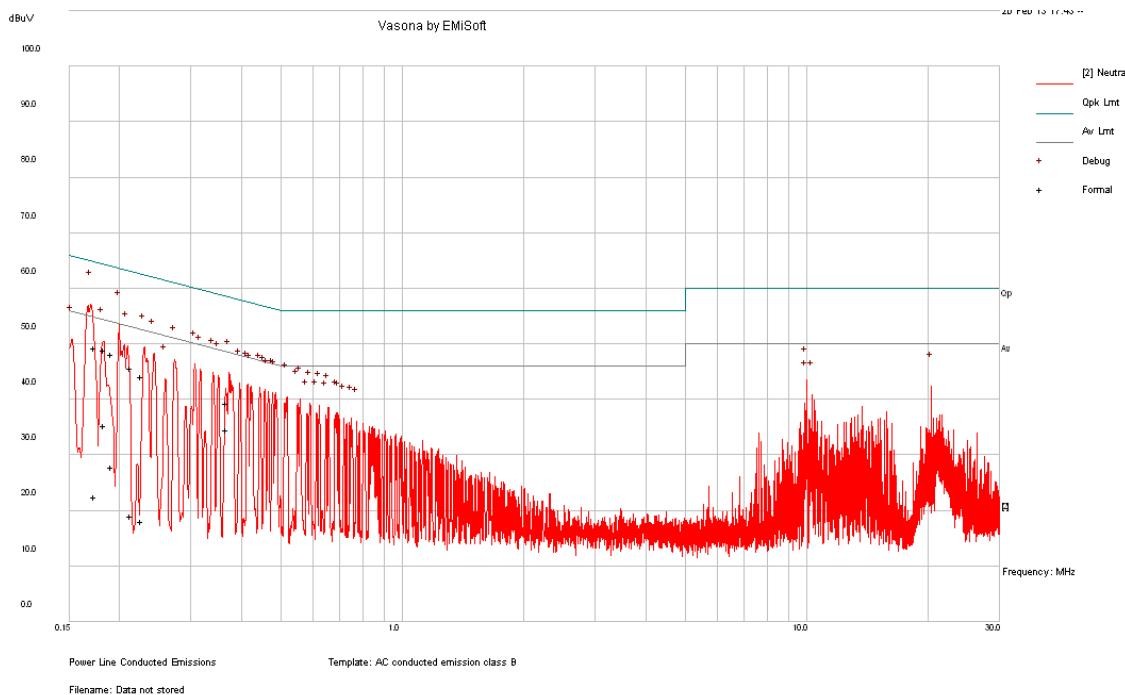120 V, 60 Hz – Neutral**Quasi-Peak Measurements**

Frequency (MHz)	Corrected Amplitude (dB μ V)	Conductor (Line/Neutral)	Limit (dB μ V)	Margin (dB)
0.183789	48.97	Neutral	64.31	-15.34
0.174219	49.35	Neutral	64.76	-15.41
0.191643	48.1	Neutral	63.97	-15.86
0.213246	45.62	Neutral	63.08	-17.46
0.226722	44.11	Neutral	62.57	-18.46
0.369297	39.35	Neutral	58.52	-19.17

Average Measurements

Frequency (MHz)	Corrected Amplitude (dB μ V)	Conductor (Line/Neutral)	Limit (dB μ V)	Margin (dB)
0.369297	34.58	Neutral	48.52	-13.94
0.183789	35.36	Neutral	54.31	-18.95
0.191643	27.91	Neutral	53.97	-26.05
0.174219	22.42	Neutral	54.76	-32.34
0.213246	19.08	Neutral	53.08	-34.00
0.226722	18.1	Neutral	52.57	-34.46

7 FCC §2.1051, §15.247(d) – Spurious Emissions at Antenna Terminals

7.1 Applicable Standard

For FCC §15.247(d) in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Requirements: CFR 47, §2.1051.

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in §2.1057.

7.2 Measurement Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

7.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Spectrum Analyzer	E4440A	US42221851	2012-02-28	1 year

Statement of Traceability: **BACL Corp.** attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

7.4 Test Environmental Conditions

Temperature:	21 °C
Relative Humidity:	42%
ATM Pressure:	102kPa


The testing was performed by Bo Li on 2013-02-19 at RF site.

7.5 Test Results


Please refer to following plots of spurious emissions.

Low Channel, 2405 MHz

30 MHz – 3 GHz

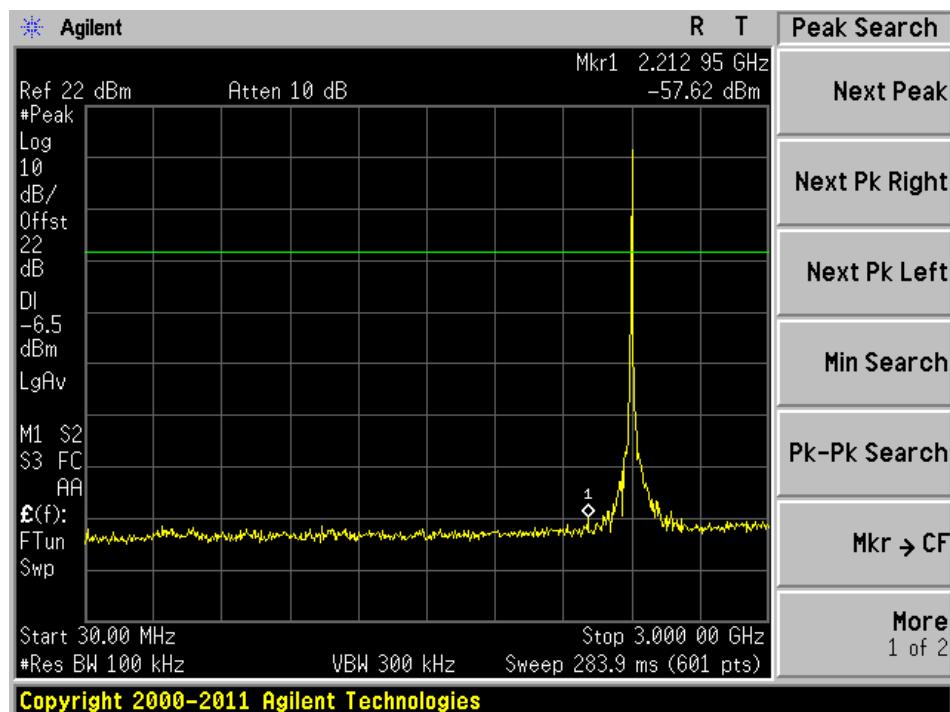


3 GHz – 25 GHz

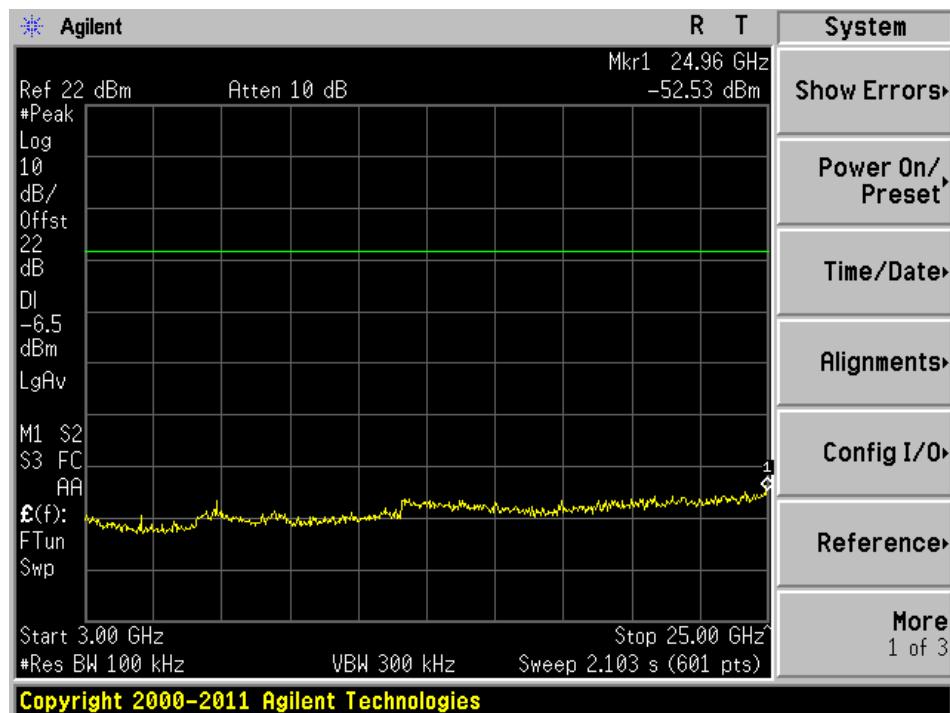


Middle Channel, 2440 MHz

30 MHz – 3 GHz

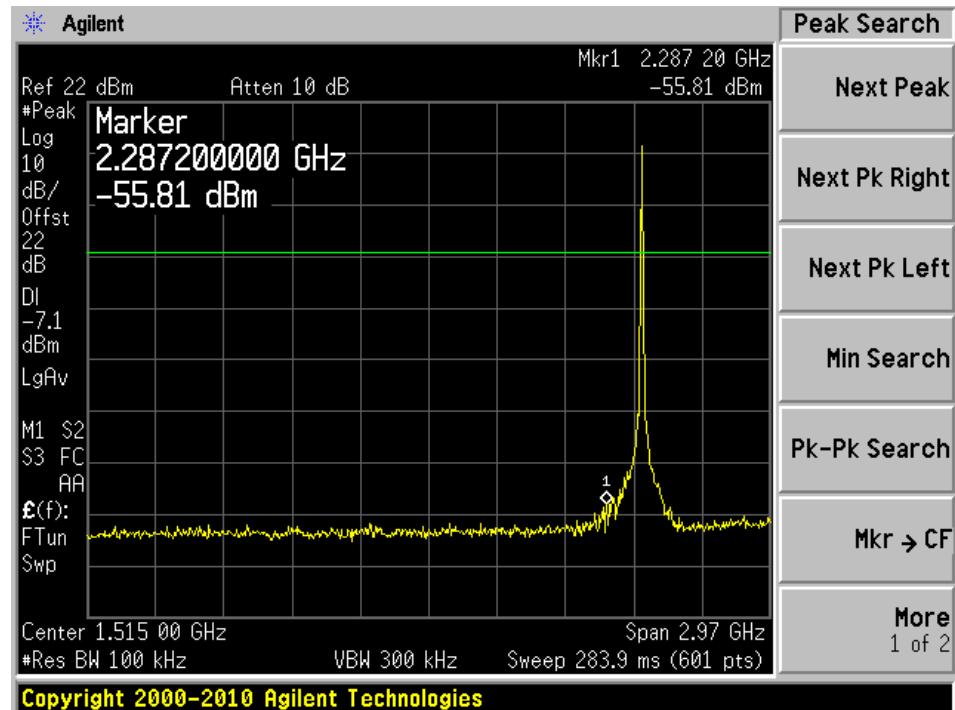


3 GHz – 25 GHz

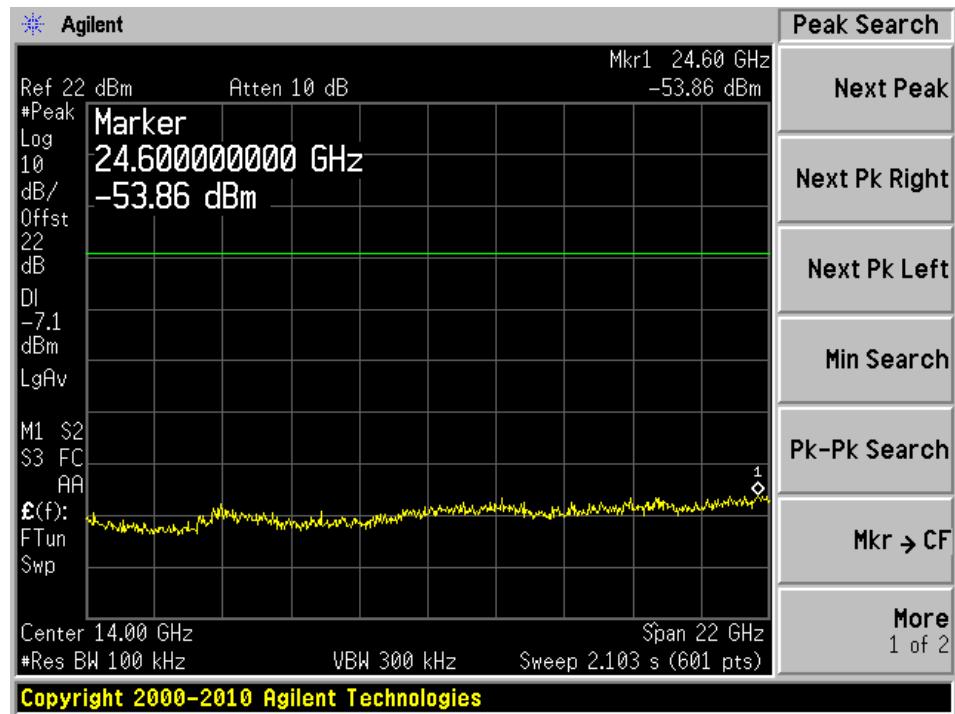


High Channel, 2475 MHz

30 MHz – 3 GHz

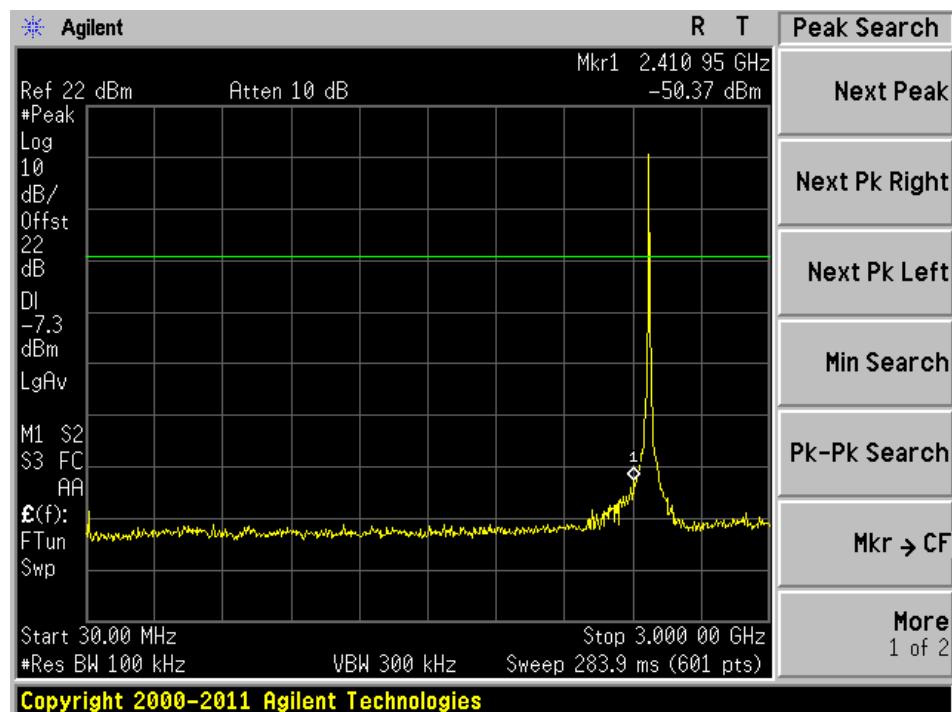

3 GHz – 25 GHz

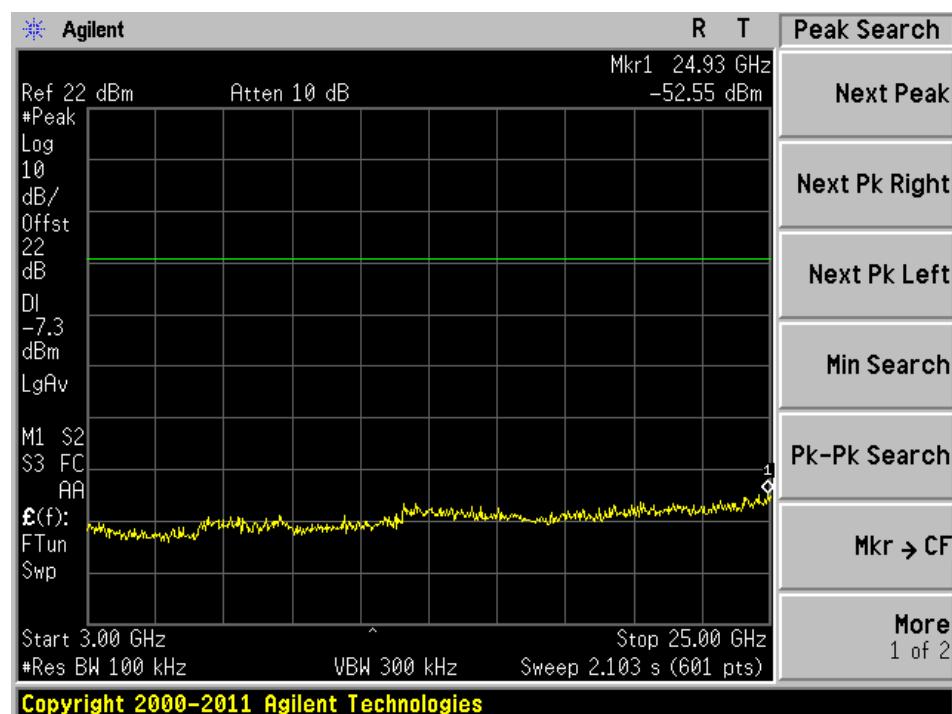

8 FCC §15.205, §15.209 & §15.247(d) – Spurious Radiated Emissions

8.1 Applicable Standard

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz.

As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As Per FCC §15.205(a) except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	960 – 1240	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	1300 – 1427	5.35 – 5.46
2.1735 – 2.1905	25.5 – 25.67	1435 – 1626.5	7.25 – 7.75
4.125 – 4.128	37.5 – 38.25	1645.5 – 1646.5	8.025 – 8.5
4.17725 – 4.17775	73 – 74.6	1660 – 1710	9.0 – 9.2
4.20725 – 4.20775	74.8 – 75.2	1718.8 – 1722.2	9.3 – 9.5
6.215 – 6.218	108 – 121.94	2200 – 2300	10.6 – 12.7
6.26775 – 6.26825	123 – 138	2310 – 2390	13.25 – 13.4
6.31175 – 6.31225	149.9 – 150.05	2483.5 – 2500	14.47 – 14.5
8.291 – 8.294	156.52475 – 156.52525	2690 – 2900	15.35 – 16.2
8.362 – 8.366	156.7 – 156.9	3260 – 3267	17.7 – 21.4
8.37625 – 8.38675	162.0125 – 167.17	3.332 – 3.339	22.01 – 23.12
8.41425 – 8.41475	167.72 – 173.2	3.3458 – 3.358	23.6 – 24.0
12.29 – 12.293	240 – 285	3.600 – 4.400	31.2 – 31.8
12.51975 – 12.52025	322 – 335.4		36.43 – 36.5
12.57675 – 12.57725	399.9 – 410		Above 38.6
13.36 – 13.41	608 – 614		

As per FCC §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.2 Test Setup

The radiated emissions tests were performed in the 5-meter Chamber, using the setup in accordance with ANSI C63.4-2003. The specification used was the FCC 15 Subpart C limits.

8.3 Test Procedure

For the radiated emissions test, the EUT host, and all support equipment power cords was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The EUT is set 3 meter away from the testing antenna, which is varied from 1-4 meter, and the EUT is placed on a turntable, which is 0.8 meter above ground plane, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna should be changed the polarization both of horizontal and vertical.

The spectrum analyzer or receiver is set as:

Below 1000 MHz:

$$\text{RBW} = 100 \text{ kHz} / \text{VBW} = 300 \text{ kHz} / \text{Sweep} = \text{Auto}$$

Above 1000 MHz:

- (1) Peak: RBW = 1MHz / VBW = 1MHz / Sweep = Auto
- (2) Average: RBW = 1MHz / VBW = 10Hz / Sweep = Auto

8.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) to indicated Amplitude (Ai) reading. The basic equation is as follows:

$$CA = Ai + AF + CL + Atten - Ga$$

For example, a corrected amplitude of 40.3 dBuV/m = Indicated Reading (32.5 dBuV) + Antenna Factor (+23.5dB) + Cable Loss (3.7 dB) + Attenuator (10 dB) - Amplifier Gain (29.4 dB)

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

8.5 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Sunol Science Corp	System Controller	SC99V	122303-1	N/R	N/R
Sunol Science Corp	Combination Antenna	JB3	A020106-2	2012-08-15	1 year
Hewlett Packard	Pre-amplifier	8447D	2944A06639	2012-06-09	1 year
Mini-Circuits	Pre-amplifier	ZVA-183-S	570400946	2012-05-09	1 year
Agilent	Spectrum Analyzer	E4440A	US42221851	2012-02-28	1 year
EMCO	Horn Antenna	3315	9511-4627	2012-10-17	1 year
Rohde & Schwarz	EMI Test Receiver	ESCI 1166.5950K03	100337	2012-03-22	1 year

Statement of Traceability: BACL attests that all calibrations have been performed per the A2LA requirements, traceable to NIST.

8.6 Test Environmental Conditions

Temperature:	22°C
Relative Humidity:	42%
ATM Pressure:	102kPa

The testing was performed by Bo Li on 2013-02-21 and 2013-02-26 at 5 meter 3.

8.7 Summary of Test Results

According to the data hereinafter, the EUT complied with the FCC Title 47, Part 15C standard's radiated emissions limits, and had the worst margin of:

30-1000 MHz:

Mode: Transmitting			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Channel
-7.41	36.305	Vertical	High Channel

1 – 25 GHz:


Mode: Transmitting			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Channel
-0.394	2390	Vertical	Low Channel

Please refer to the following table for specific test result details

8.8 Radiated Emissions Test Data and Plots


1) 30 – 1000 MHz, measured at 3 meters

Low Channel: 2405 MHz

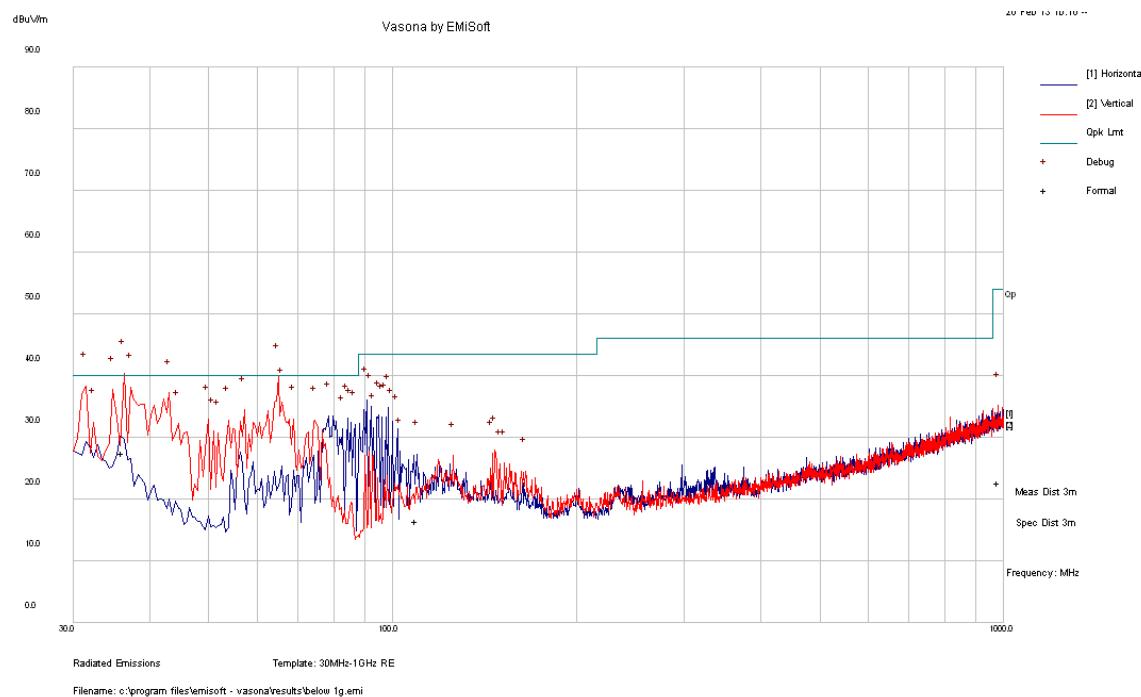


Quasi-Peak Measurements

Frequency (MHz)	Corrected Amplitude (dBuV)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBuV)	Margin (dB)
36.06425	27.56	288	V	7	40	-12.44
109.3025	16.47	142	H	332	43.5	-27.03
979.263	22.66	141	V	72	54	-31.34

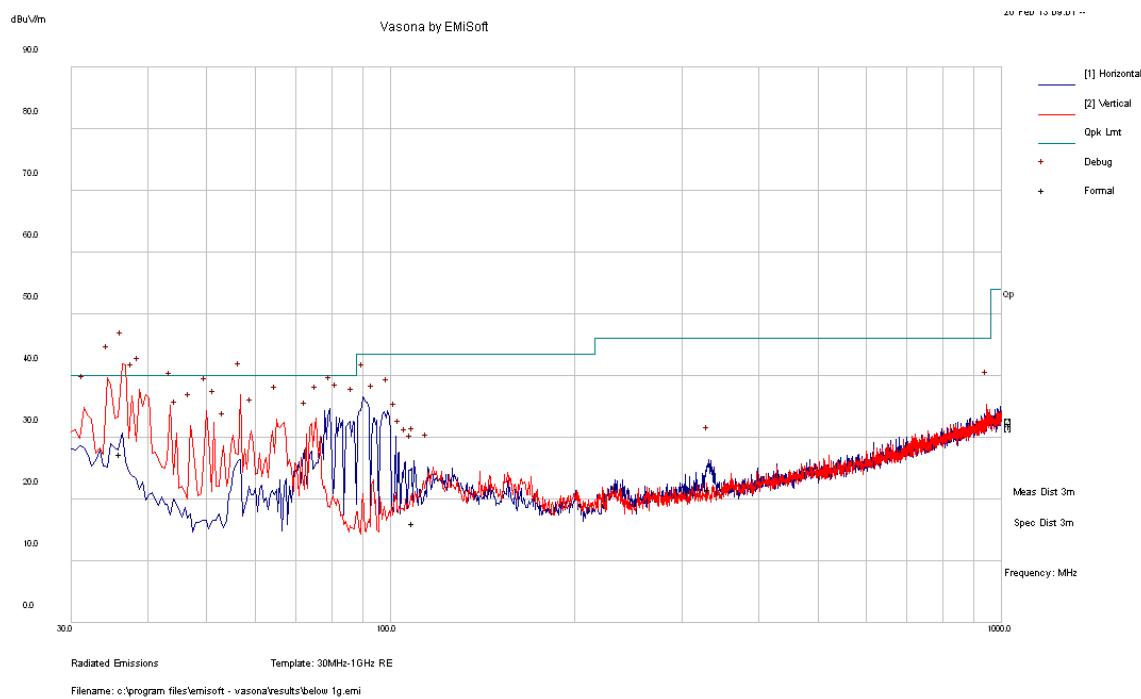Middle Channel: 2440 MHz**Quasi-Peak Measurements**

Frequency (MHz)	Corrected Amplitude (dBuV)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBuV)	Margin (dB)
36.103	27.42	313	V	174	40	-12.58
331.4035	21.62	126	H	179	46	-24.38
108.84975	16.15	297	H	84	43.5	-27.35

High Channel: 2475 MHz

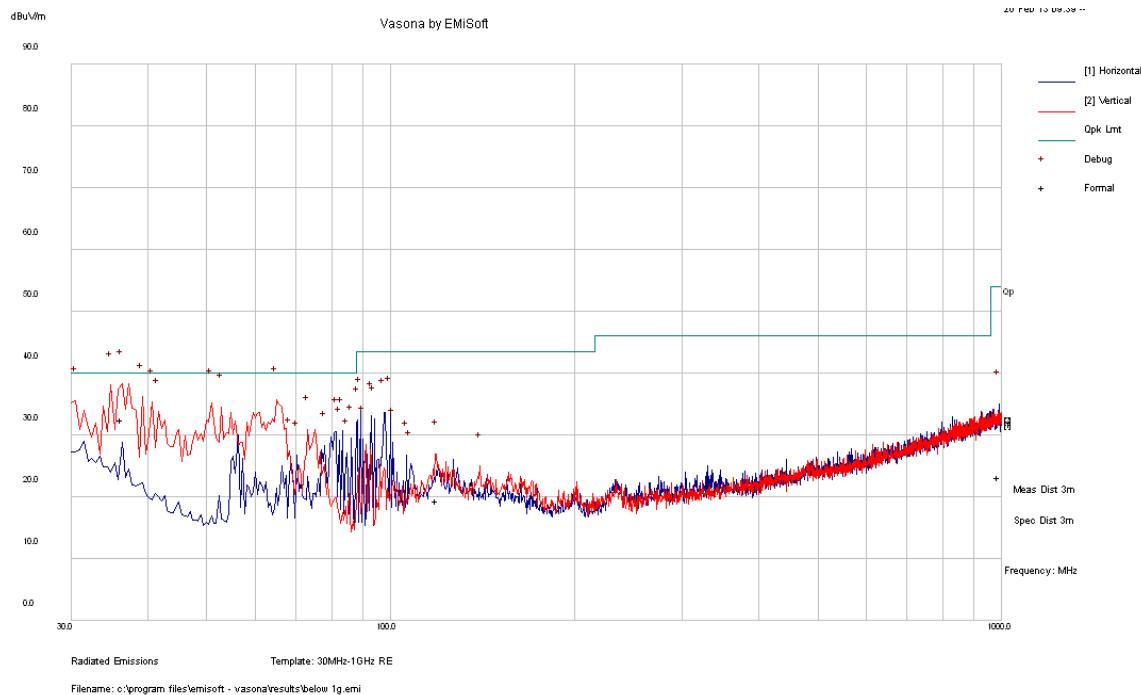

Quasi-Peak Measurements

Frequency (MHz)	Corrected Amplitude (dBuV)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBuV)	Margin (dB)
36.305	32.59	135	V	172	40	-7.41
118.89625	19.39	129	V	145	43.5	-24.11
988.67525	23.19	214	H	3	54	-30.81

2) Above 1 GHz, measured at 3 meters

Frequency (MHz)	S.A. Reading (dB μ V)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dB μ V/m)	FCC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dB μ V/m)	Margin (dB)	
Low Channel 2405 MHz, measured at 3 meters											
2405	84.76	69	100	V	28.956	3.12	0	116.836	-	-	Fun/Peak
2405	81.3	52	110	H	28.956	3.12	0	113.376	-	-	Fun/Peak
2405	51.32	69	100	V	28.956	3.12	0	83.396	-	-	Fun/Ave
2405	49.52	52	110	H	28.956	3.12	0	81.596	-	-	Fun/Ave
2390	41.53	69	100	V	28.956	3.12	0	73.606	74	-0.394	Peak
2390	38.72	52	110	H	28.956	3.12	0	70.796	74	-3.204	Peak
2390	14.13	69	100	V	28.956	3.12	0	46.206	54	-7.794	Ave
2390	12.99	52	110	H	28.956	3.12	0	45.066	54	-8.934	Ave
4810	47.23	332	105	V	33.097	4.56	27.7	57.187	74	-16.813	Peak
4810	53.79	327	112	H	33.097	4.56	27.7	63.747	74	-10.253	Peak
4810	28.81	332	105	V	33.097	4.56	27.7	38.767	54	-15.233	Ave
4810	31.77	327	112	H	33.097	4.56	27.7	41.727	54	-12.273	Ave
7215	58.3	38	100	V	35.928	5.49	27.58	72.138	96.836	-24.698	Peak
7215	59.02	61	112	H	35.928	5.49	27.58	72.858	93.376	-20.518	Peak
7215	33.82	38	100	V	35.928	5.49	27.58	47.658	63.396	-15.738	Ave
7215	34.51	61	112	H	35.928	5.49	27.58	48.348	61.596	-13.248	Ave
9620	42.81	43	100	V	37.954	6.54	27.06	60.244	96.836	-36.592	Peak
9620	43.42	294	100	H	37.954	6.54	27.06	60.854	93.376	-32.522	Peak
9620	25.85	43	100	V	37.954	6.54	27.06	43.284	63.396	-20.112	Ave
9620	25.54	294	100	H	37.954	6.54	27.06	42.974	61.596	-18.622	Ave
Middle Channel 2440 MHz, measured at 3 meters											
2440	84.27	53	100	V	28.956	3.12	0	116.346	-	-	Fun/Peak
2440	79.75	53	100	H	28.956	3.12	0	111.826	-	-	Fun/Peak
2440	50.24	53	100	V	28.956	3.12	0	82.316	-	-	Fun/Ave
2440	48.11	53	100	H	28.956	3.12	0	80.186	-	-	Fun/Ave
4880	46.07	351	100	V	33.327	4.54	27.76	56.177	74	-17.823	Peak
4880	50.67	325	117	H	33.327	4.54	27.76	60.777	74	-13.223	Peak
4880	28.48	351	100	V	33.327	4.54	27.76	38.587	54	-15.413	Ave
4880	30.91	325	117	H	33.327	4.54	27.76	41.017	54	-12.983	Ave
7320	56.67	49	100	V	36.369	5.57	27.51	71.099	74	-2.901	Peak
7320	57.17	86	155	H	36.369	5.57	27.51	71.599	74	-2.401	Peak
7320	33.44	49	100	V	36.369	5.57	27.51	47.869	54	-6.131	Ave
7320	34.56	86	155	H	36.369	5.57	27.51	48.989	54	-5.011	Ave
9760	44.17	292	100	V	38.087	6.62	26.98	61.897	96.346	-34.449	Peak
9760	44.04	48	100	H	38.087	6.62	26.98	61.767	91.826	-30.059	Peak
9760	26.72	292	100	V	38.087	6.62	26.98	44.447	62.316	-17.869	Ave
9760	26.3	48	100	H	38.087	6.62	26.98	44.027	60.186	-16.159	Ave

Frequency (MHz)	S.A. Reading (dB μ V)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dB μ V/m)	FCC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dB μ V/m)	Margin (dB)	
High Channel 2475 MHz, measured at 3 meters											
2475	83.1	82	100	V	29.155	3.25	0	115.505	-	-	Fun/Peak
2475	79.1	54	100	H	29.155	3.25	0	111.505	-	-	Fun/Peak
2475	49.77	82	100	V	29.155	3.25	0	82.175	-	-	Fun/Ave
2475	48.74	54	100	H	29.155	3.25	0	81.145	-	-	Fun/Ave
2483.5	41.1	82	100	V	29.155	3.25	0	73.505	74	-0.495	Peak
2483.5	36.32	54	100	H	29.155	3.25	0	68.725	74	-5.275	Peak
2483.5	13.97	82	100	V	29.155	3.25	0	46.375	54	-7.625	Ave
2483.5	10.86	54	100	H	29.155	3.25	0	43.265	54	-10.735	Ave
4950	46.16	239	100	V	33.327	4.52	27.75	56.257	74	-17.743	Peak
4950	49.43	322	100	H	33.327	4.52	27.75	59.527	74	-14.473	Peak
4950	28.57	239	100	V	33.327	4.52	27.75	38.667	54	-15.333	Ave
4950	30.17	322	100	H	33.327	4.52	27.75	40.267	54	-13.733	Ave
7425	55.09	214	100	V	36.565	5.62	27.51	69.765	74	-4.235	Peak
7425	57.48	64	146	H	36.565	5.62	27.51	72.155	74	-1.845	Peak
7425	33.48	214	100	V	36.565	5.62	27.51	48.155	54	-5.845	Ave
7425	34.34	64	146	H	36.565	5.62	27.51	49.015	54	-4.985	Ave
9900	43.06	40	104	V	38.287	6.55	26.98	60.917	88.225	-27.308	Peak
9900	42.49	294	105	H	38.287	6.55	26.98	60.347	90.605	-30.258	Peak
9900	25.42	40	104	V	38.287	6.55	26.98	43.277	85.235	-41.958	Ave
9900	26.07	294	105	H	38.287	6.55	26.98	43.927	87.905	-43.978	Ave

9 FCC §15.247(a)(2) – 6 dB & 99% Emission Bandwidth

9.1 Applicable Standard

According to FCC §15.247(a)(2), systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz

9.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emissions bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

9.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Spectrum Analyzer	E4440A	US42221851	2012-02-28	1 year

Statement of Traceability: BACL Corp. attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

9.4 Test Environmental Conditions

Temperature:	21 °C
Relative Humidity:	42%
ATM Pressure:	102kPa

The testing was performed by Bo Li on 2013-02-19 at RF site.

9.5 Test Results

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	99% Emission Bandwidth (MHz)	Limit (MHz)	Results
Low	2405	1.408	2.2647	> 0.5	Compliant
Middle	2440	1.515	2.4142	> 0.5	Compliant
High	2475	1.519	2.4396	> 0.5	Compliant

Please refer to the following plots for detailed test results

Low channel: 2405 MHz



Middle channel: 2440 MHz**High channel: 2475 MHz**

10 FCC §15.247(b) – Peak Output Power Measurement


10.1 Applicable Standard

FCC §15.247(b) the maximum peak output power of the intentional radiator shall not exceed the following:

FCC §15.247(b) (3) For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

10.2 Measurement Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to a spectrum analyzer.
3. Add a correction factor to the display.

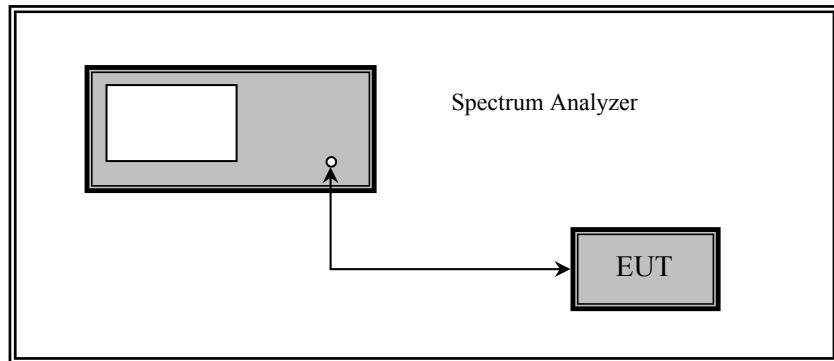

10.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Spectrum Analyzer	E4440A	US42221851	2012-02-28	1 year

Statement of Traceability: BACL Corp. attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

10.4 Test Environmental Conditions


Temperature:	21 °C
Relative Humidity:	42%
ATM Pressure:	102kPa



The testing was performed by Bo Li on 2013-02-19 at RF site.

10.5 Test Results

Channel	Frequency (MHz)	Peak Conducted Power (dBm)	FCC Limit (dBm)	Margin (dB)
Low	2405	17.77	30	-12.23
Middle	2440	17.92	30	-12.08
High	2475	17.18	30	-12.82

Low channel: 2405 MHz

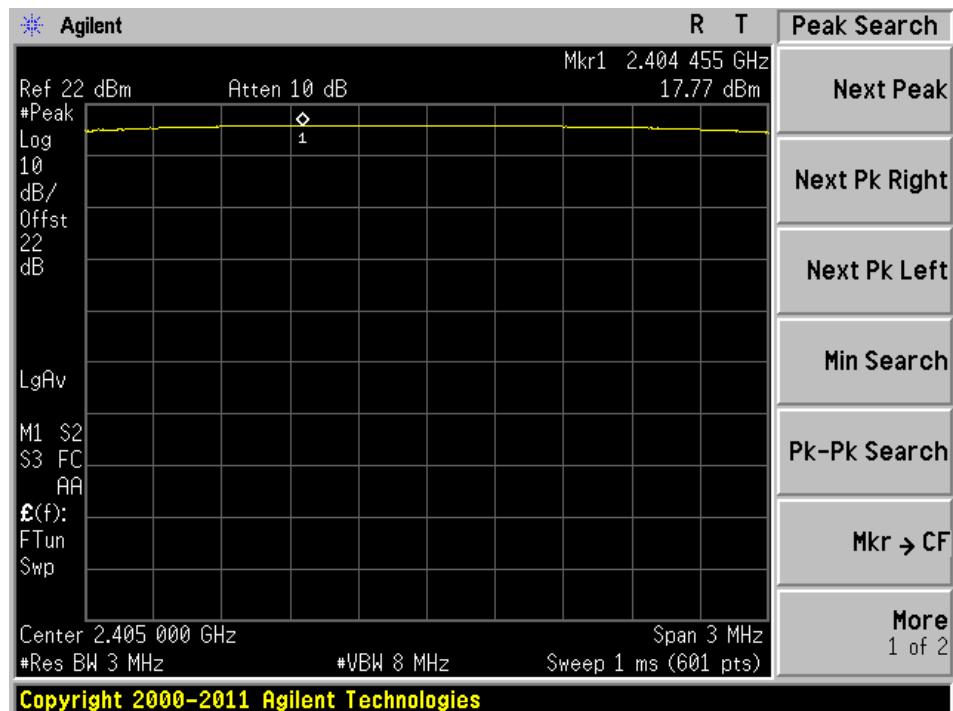

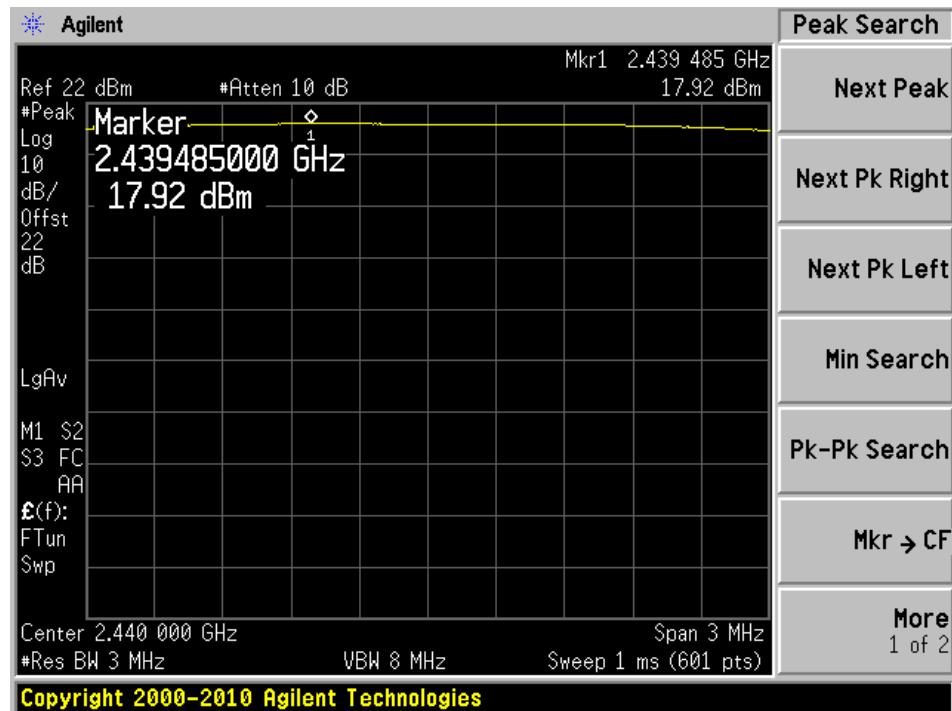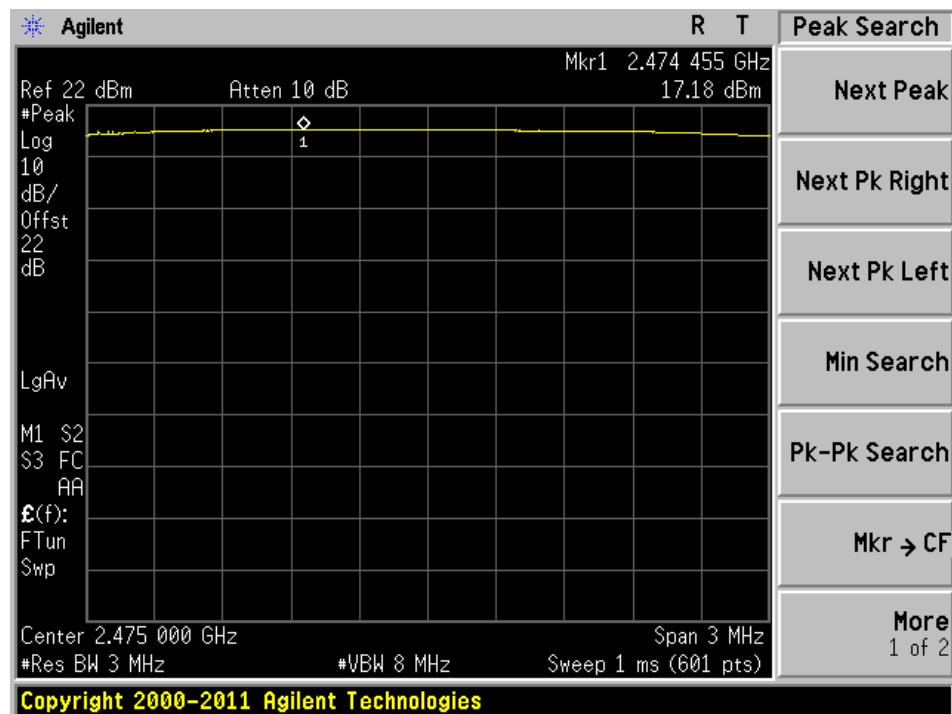Middle channel: 2440 MHz**High channel: 2475 MHz**

11 FCC §15.247(d) – 100 kHz Bandwidth of Band Edges

11.1 Applicable Standard

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emissions limits specified in §15.209(a) see §15.205(c)).

11.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

11.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Spectrum Analyzer	E4440A	US42221851	2012-02-28	1 year

Statement of Traceability: **BACL Corp.** attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

11.4 Test Environmental Conditions


Temperature:	21 °C
Relative Humidity:	42%
ATM Pressure:	102kPa

The testing was performed by Bo Li on 2013-02-19 at RF site.


11.5 Test Results

Please refer to following pages for plots of band edge.

Low Band Edge

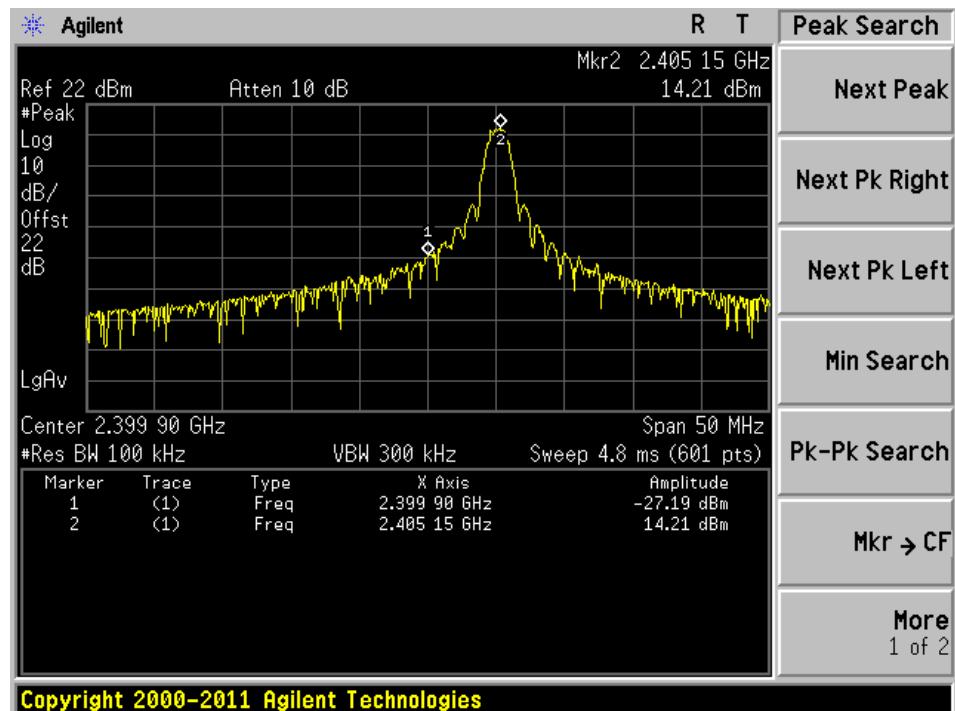

High Band Edge

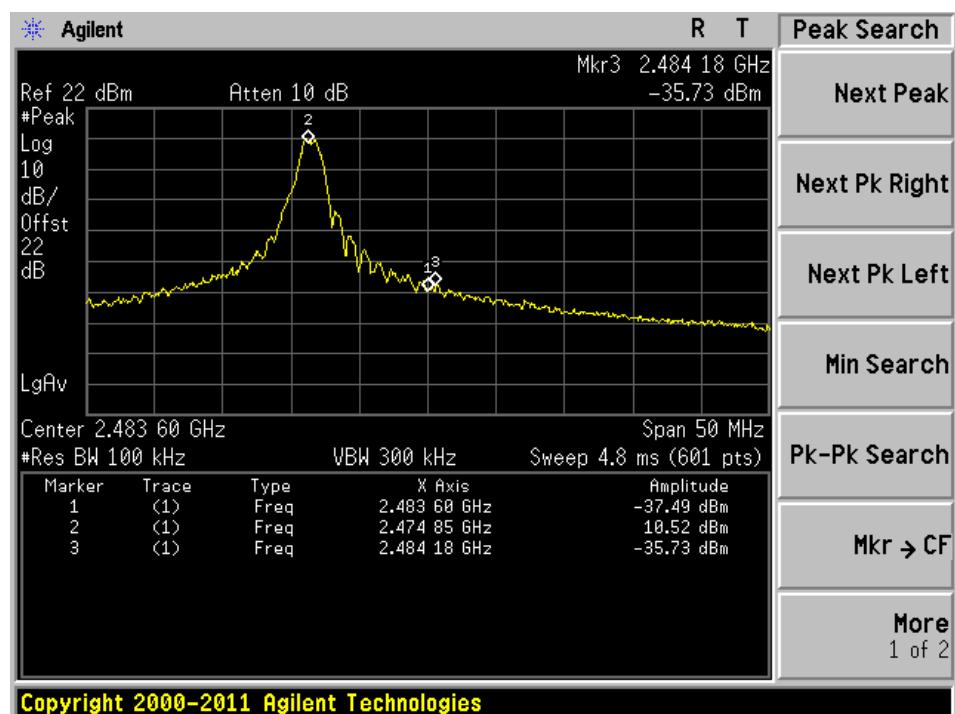

12 FCC §15.247(e) – Power Spectral Density

12.1 Applicable Standard

According to FCC §15.247 (e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

12.2 Measurement Procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW \geq 3 kHz.
4. Set the VBW \geq 3 x RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

12.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Spectrum Analyzer	E4440A	US42221851	2012-02-28	1 year

Statement of Traceability: BACL Corp. attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

12.4 Test Environmental Conditions


Temperature:	21 °C
Relative Humidity:	42%
ATM Pressure:	102kPa


The testing was performed by Bo Li on 2013-02-19 at RF site.

12.5 Test Results

Channel	Frequency (MHz)	PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Margin (dB)
Low	2405	7.05	8	-0.95
Middle	2440	6.66	8	-1.34
High	2475	5.72	8	-2.28

Please refer to the following plots for detailed test results.

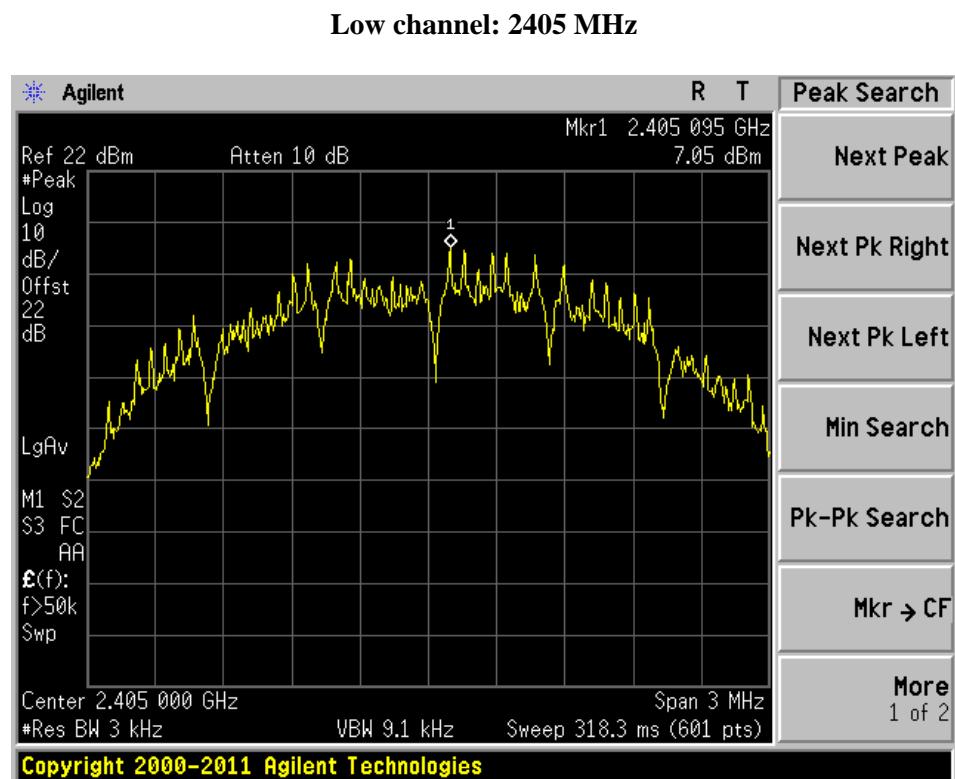

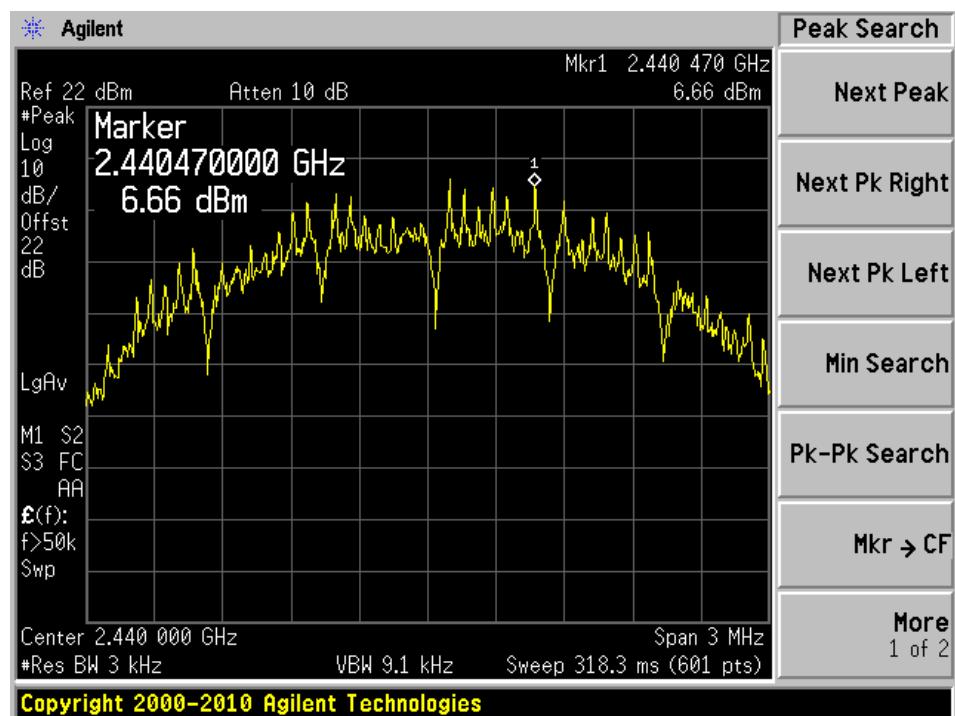Middle channel: 2440 MHz**High channel: 2475 MHz**