



LS RESEARCH, LLC

Wireless Product Development

W66 N220 Commerce Court • Cedarburg, WI 53012 USA • Phone: 262.375.4400 • Fax: 262.375.4248 • www.lsr.com

ENGINEERING TEST REPORT # 313249 B

LSR Job #: C-1808

Compliance Testing of:

TiWi-BLECA

Test Date(s):

August 7, 10 2010, September 29, 2010

August 15,21,22,23 2012, December 20, 2012

July 26, 2013

Prepared For:

LS Research

Attn: Brian Petted

W66 N220 Commerce Court

Cedarburg, WI 53012

This Test Report is issued under the Authority of:

Tom Smith, VP of EMC Test Services

Signature: Date: 9-19-13

Test Report Reviewed by:

Tom Smith, VP of EMC Test Services

Signature: Date: 9-19-13

Report by:

Adam Alger, EMC Engineer

Signature: Date: 9-19-13

This Test Report may not be reproduced, except in full, without written approval of LS Research, LLC.

Prepared For: LS Research

Report: TR 313249 B FCCICTX (FHSS)

LSR: C-1808

Name: TiWi-BLECA

Model: TiWi-BLECA

Serial: Eng. Sample

Table of Contents

i.	Title Page	1
ii.	Table of Contents	2
iii.	LS Research, LLC.....	3
1.0	Summary of Test Report.....	4
2.0	Test Facilities	4
3.0	Client Information.....	5
3.1	Equipment Under Test (EUT) Information.....	5
3.2	Product Description	5
3.3	Modifications Incorporated In the EUT for Compliance Purposes	6
4.0	Conditions of Test.....	6
5.0	Additional Information	6
6.0	Test Equipment	6
7.0	Conformance Summary	7
Appendix A – Test Equipment		8
Appendix B – Test Data.....		9
	B.1 – RF Conducted Emissions	9
	B.2 – Radiated Emissions	25
	B.3 – AC Mains Emissions.....	35
Appendix C - Uncertainty Summary		40
Appendix D - References.....		41
Appendix E – MPE Calculations		42
Appendix F – Duty Cycle Measurements.....		43

Prepared For: LS Research	Name: TiWi-BLECA
Report: TR 313249 B FCCICTX (FHSS)	Model: TiWi-BLECA
LSR: C-1808	Serial: Eng. Sample

LS Research, LLC in Review

As an EMC Testing Laboratory, our Accreditation and Assessments are recognized through the following:



TESTING CERT #1255.01

A2LA – American Association for Laboratory Accreditation

Accreditation based on ISO/IEC 17025: 2005 with Electrical (EMC) Scope of Accreditation
A2LA Certificate Number: 1255.01



Federal Communications Commission (FCC) – USA

Listing of 3 Meter Semi-Anechoic Chamber based on Title 47 CFR – Part 2.948
FCC Registration Number: 90756



Canada

Industry Canada

On file, 3 Meter Semi-Anechoic Chamber based on RSS-212 – Issue 1
File Number: IC 3088-A
On file, 3 and 10 Meter OATS based on RSS-212 – Issue 1
File Number: IC 3088



U. S. Conformity Assessment Body (CAB) Validation

Validated by the European Commission as a U. S. Competent Body operating under the U. S./EU, Mutual Recognition Agreement (MRA) operating under the European Union Electromagnetic Compatibility – Council Directive 2004/108/EC (formerly 89/336/EEC, Article 10.2).
Date of Validation: January 16, 2001

Validated by the European Commission as a U.S. Notified Body operating under the U.S. /EU, Mutual Recognition Agreement (MRA) operating under the European Union Telecommunication Equipment – Council Directive 99/5/EC, Annex V.
Date of Validation: November 20, 2002
Notified Body Identification Number: 1243

Prepared For: LS Research

Name: TiWi-BLECA

Report: TR 313249 B FCCICTX (FHSS)

Model: TiWi-BLECA

LSR: C-1808

Serial: Eng. Sample

1.0 Summary of Test Report

The TiWi-BLECA was tested and MEETS the following FHSS requirements:

Rule	Description	Procedure	Compliant	Note
FCC: 15.247(d) IC: RSS-210 A8.5	Radiated Emissions at Band-edge	ANSI C63.4-2003	Yes	1
FCC: 15.247(d) IC: RSS-210 A8.5	Radiated Harmonics	ANSI C63.4-2003	Yes	1
FCC: 15.247(d) IC: RSS-210 A8.5	Radiated Emissions	ANSI C63.4-2003	Yes	1
FCC: 15.109 IC: RSS-GEN	Receiver radiated Emissions	ANSI C63.4-2003	Yes	1
FCC: 15.247(b) IC: RSS-210 A8.4	Maximum Output Power	ANSI C63.4-2003	Yes	2
FCC: 15.247(a) (1) IC: RSS-GEN 4.6.1	20 dB and 99 % Bandwidth	ANSI C63.4-2003	Yes	2
FCC: 15.247(b) (1) IC: RSS-210 A8.1	Channel Plan and Separation	ANSI C63.4-2003	Yes	2
FCC: 15.247(d) IC: RSS-210 A8.5	Spurious Emissions at Antenna Terminals	ANSI C63.4-2003	Yes	2
FCC: 15.207 IC: RSS-GEN	AC Mains Emissions	ANSI C63.4-2003	Yes	No

Note 1: Tested in three orthogonal positions.

Note 2: RF Conducted measurement at antenna terminal.

2.0 Test Facilities

All testing was performed at:

LS Research, LLC
W66 N220 Commerce Court
Cedarburg, Wisconsin, 53012 USA

LS Research, LLC is accredited by A2LA (American Association for Laboratory Accreditation) to the requirements of ISO/IEC 17025, 2005 “General Requirements for the Competence of Calibration and Testing Laboratories”.

LS Research, LLC’s scope of accreditation includes all test methods listed herein, unless otherwise noted.

Prepared For: LS Research	Name: TiWi-BLECA
Report: TR 313249 B FCCICTX (FHSS)	Model: TiWi-BLECA
LSR: C-1808	Serial: Eng. Sample

3.0 Client Information

Manufacturer Name:	LS Research
Address:	W66 N220 Commerce Court Cedarburg, WI 53012
Contact Person:	Brian Petted

3.1 Equipment Under Test (EUT) Information

The following information has been supplied by the applicant.

Product Name:	TiWi-BLECA
Model Number:	TiWi-BLECA
Serial Number:	Eng. Sample
FCC ID	TFB-BLECA
IC Number	5969A-BLECA

3.2 Product Description

The TiWi-BLECA module is a multi-standard module with support for WLAN (802.11 b/g/n), Bluetooth V2.1 and Bluetooth 4.0.

Bluetooth (FHSS):

Frequency Range (MHz)	2402-2480 MHz
RF Power In Watts (conducted)	Max 7.1 mW; Min 5.5 mW
Max Conducted Output Power (dBm)	8.5
Occupied Bandwidth 99%	1.23 MHz
Type of Modulation	GFSK
Emission Designator	1M23FXD
Transmitter Spurious (worst case) at 3 meters	49.33 dB μ V/m @ 2.4835GHz, Avg
Stepped (Y/N)	N
Step Value	N/A
Frequency Tolerance %,Hz, ppm	Better than 100 ppm
Antenna: Detachable / Non-detachable	Non-detachable
Antenna: Type	Chip
Antenna Gain (Peak)	1.3 dBi
FCC Rule Part	Title 47 Part 15.247
Industry Canada Rule Part	RSS-210 Issue 8 2010
Modular Filing	Yes
RF Exposure Type	Mobile
Receiver Spurious (worst case) at 3 meters	33.2 dB μ V/m @ 72.1MHz, QP

Prepared For: LS Research	Name: TiWi-BLECA
Report: TR 313249 B FCCICTX (FHSS)	Model: TiWi-BLECA
LSR: C-1808	Serial: Eng. Sample

3.3 Modifications Incorporated In the EUT for Compliance Purposes

None noted at time of test

3.4 Deviations & Exclusions from Test Specifications

None noted at time of test

4.0 Conditions of Test

Environmental:

Temperature: 20-25° C
Relative Humidity: 30-60%
Atmospheric Pressure: 86-106 kPa

Mains Voltage:

3.3VDC from bench supply

5.0 Additional Information

The EUT was programmed from a laptop computer with LSR's proprietary control program. Once programmed the radio was powered from a bench supply at 3.3VDC.

6.0 Test Equipment

All test equipment is calibrated by a calibration laboratory accredited by A2LA to the requirements of ISO 17025. For a complete list of test equipment and calibration dates, see Appendix A. Unless otherwise noted, resolution bandwidth of measuring instrument used during testing for given frequency range, see below. For average measurements above 1000MHz the video bandwidth is set at 10Hz.

Frequency Range	Resolution Bandwidth
9 kHz – 150 kHz	200 Hz
150 kHz – 30 MHz	9 kHz
30 MHz – 1000 MHz	120 kHz
Above 1000 MHz	1 MHz

7.0 Conformance Summary

The EUT was found to MEET the requirements as described within the specification of FCC Title 47, CFR Part 15.247 (2011) and Industry Canada RSS-210, Issue 8 (2010)

If some emissions are seen to be within 3 dB of their respective limits:

As these levels are within the tolerances of the test equipment and site employed, there is a possibility that this unit, or a similar unit selected out of production may not meet the required limit specification if tested by another agency.

LS Research, LLC certifies that the data contained herein was taken under conditions that meet or exceed the requirements of the test specifications. The results in this Test Report apply only to the item(s) tested on the above-specified dates. Any modifications made to the EUT subsequent to the indicated test date(s) will invalidate the data herein, and void this certification.

Prepared For: LS Research	Name: TiWi-BLECA
Report: TR 313249 B FCCICTX (FHSS)	Model: TiWi-BLECA
LSR: C-1808	Serial: Eng. Sample

Appendix A – Test Equipment



Date : 13-Aug-2012 Type Test : Radiated Emissions Job # : C-1520
 Prepared By: Adam Customer : LSR Quote #: 312182

No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status
1	EE 960157	3Hz-13.2GHz Spectrum Analyzer	Agilent	E4445A	MY48250225	6/29/2012	6/29/2013	Active Calibration
2	EE 960158	RF Preselector	Agilent	N9039A	MY46520110	6/29/2012	6/29/2013	Active Calibration
3	AA 960150	Bicon Antenna	ETS	310B	0003-3346	11/15/2011	11/15/2012	Active Calibration
4	AA 960078	Log Periodic Antenna	EMCO	93146	9701-4855	11/15/2011	11/15/2012	Active Calibration
5	AA 960007	Double Ridge Horn Antenna	EMCO	3115	9311-4138	5/16/2012	5/16/2013	Active Calibration
6	EE 960156	100kHz-1GHz Analog Signal Generator	Agilent	N5181A	MY49060062	6/30/2012	6/30/2013	Active Calibration
7	EE 960147	Pre-Amp	Adv. Micro	\wLA612	123101	1/6/2012	1/6/2013	Active Calibration
8	AA 960081	Double Ridge Horn Antenna	EMCO	3115	6907	1/6/2012	1/6/2013	Active Calibration
9	AA 960144	Phaseflex	Gore	EKD01D010720	5800373	6/1/2011	6/1/2013	Active Calibration
10	EE 960161	26.5-40GHz LNA	Ducommun Tech	ALN-33144030	1103717-01	10/4/2011	10/4/2012	Active Calibration
11	AA 960154	2.4GHz High Pass Filter	KVM	HPP-L-14186	7272-02	6/28/2012	6/28/2013	Active Calibration
12	EE 960073	Spectrum Analyzer	Agilent	E4446A	US45300564	5/9/2012	5/9/2013	Active Calibration
13	EE 960146	Std. Gain Horn Ant. w/preamp	Adv. Micro	\wLA622-4	123001	11/3/2011	11/3/2012	Active Calibration

Project Engineer: Adam O'Age Quality Assurance: Hynd



Date : 25-Apr-2013 Type Test : Conducted Measurements Job # : C-1704
 Prepared By: Aidi Customer : Anritsu Quote #: 313052

No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status
1	AA 960143	Phaseflex	Gore	EKD01D01048.0	5546519	6/1/2011	6/1/2013	Active Calibration
2	EE 960073	Spectrum Analyzer	Agilent	E4446A	US45300564	5/9/2012	5/9/2013	Active Calibration

Project Engineer: Hynd Quality Assurance: Peter Fuim



Date : 28-Sep-2010 Type Test : Conducted AC Emissions Job # : C-884
 Prepared By: Peter Customer : LSR Quote #: 310117

No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status
1	AA 960008	LSN	EMCO	3816/2NM	9701-1057	12/15/2009	12/15/2010	Active Calibration
2	EE 960157	3Hz-13.2GHz Spectrum Analyzer	Agilent	E4445A	MY48250225	3/17/2009	3/17/2010	Active Calibration
3	EE 960158	RF Preselector	Agilent	N9039A	MY46520110	7/2/2009	7/2/2010	Active Calibration
4	AA 960072	Transient Limiter	HP	11947A	3107A01708	9/15/2009	10/15/2010	Active Calibration

Prepared For: LS Research	Name: TiWi-BLECA
Report: TR 313249 B FCCICTX (FHSS)	Model: TiWi-BLECA
LSR: C-1808	Serial: Eng. Sample

Appendix B – Test Data
B.1 – RF Conducted Emissions

Manufacturer	LS Research, LLC
Test Location	LS Research, LLC
Rule Part	FCC Part 15.247 / RSS-210 Annex 8
General Measurement Procedure	ANSI C63.4-2003 / FCC Public Notice DA 00-705
General Description of Measurement	A direct measurement of the transmitted signal was performed at the antenna port of the EUT via a cable connection to a spectrum analyzer. An attenuator was placed in series with the cable to protect the spectrum analyzer. The loss from the cable and the attenuator were added on the analyzer as gain offset settings there by allowing direct measurements, without the need for any further corrections. The EUT was configured to run in a continuous transmit mode, while being supplied with typical data as a modulation source.

Prepared For: LS Research	Name: TiWi-BLECA
Report: TR 313249 B FCCICTX (FHSS)	Model: TiWi-BLECA
LSR: C-1808	Serial: Eng. Sample

B.1.1 – RF Conducted Emissions – Bandwidth, Power, and Spurious

Manufacturer	LS Research
Date	12-20-12, April 26 th 2013
Operator	Adam A, Khairul Aidi Zainal
Temp. / R.H.	20 - 25° C / 30-60% R.H.
Test Voltage	3.3 VDC
Test Location	LS Research, LLC – Bench Measurements
Rule Part	15.247
Measurement Procedure	DA 00-705 March 2000
Description of Measurement	A direct measurement of the transmitted signal was performed at the antenna port of the EUT via a cable connection to a spectrum analyzer. An attenuator was placed in series with the cable to protect the spectrum analyzer. The loss from the cable and the attenuator were added on the analyzer as gain offset settings there by allowing direct measurements, without the need for any further corrections. The EUT was configured to run in a continuous transmit mode, while being supplied with typical data as a modulation source.
Additional Notes	1) None

Bandwidth

GFSK:

Frequency (MHz)	20dB BW (kHz)	99% BW (kHz)
2402.0	885.3	827.2
2440.0	886.7	831.5
2480.0	885.4	836.0

EDR2:

Frequency (MHz)	20dB BW (kHz)	99% BW (kHz)
2402.0	1381.0	1227.5
2440.0	1376.0	1223.3
2480.0	1375.0	1229.0


EDR3:

Frequency (MHz)	20dB BW (kHz)	99% BW (kHz)
2402.0	1357.0	1223.3
2440.0	1357.0	1221.7
2480.0	1357.0	1220.9


Prepared For: LS Research	Name: TiWi-BLECA
Report: TR 313249 B FCCICTX (FHSS)	Model: TiWi-BLECA
LSR: C-1808	Serial: Eng. Sample

Plots


GFSK Low Channel

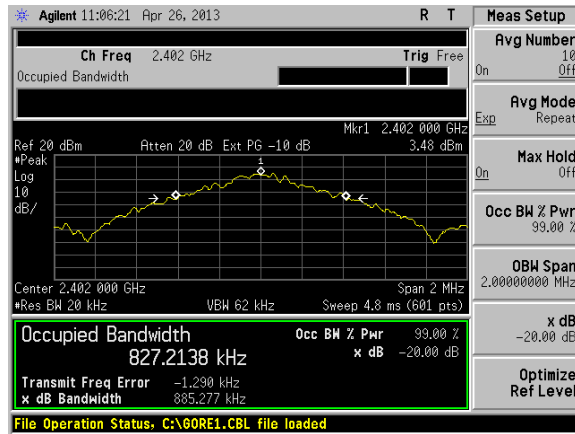

GFSK Middle Channel

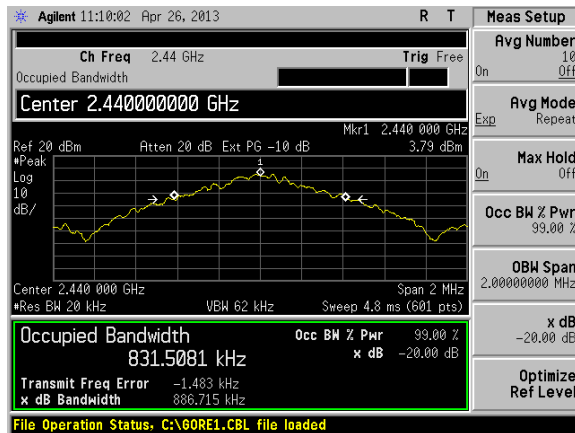


GFSK Highest Channel

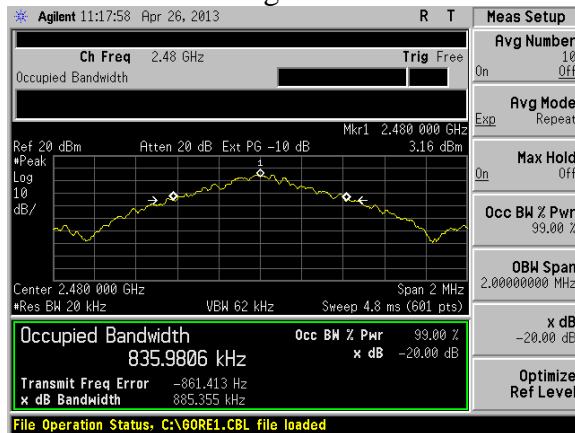

Prepared For: LS Research
 Report: TR 313249 B FCCICTX (FHSS)
 LSR: C-1808

Name: TiWi-BLECA
 Model: TiWi-BLECA
 Serial: Eng. Sample


EDR2 Low Channel

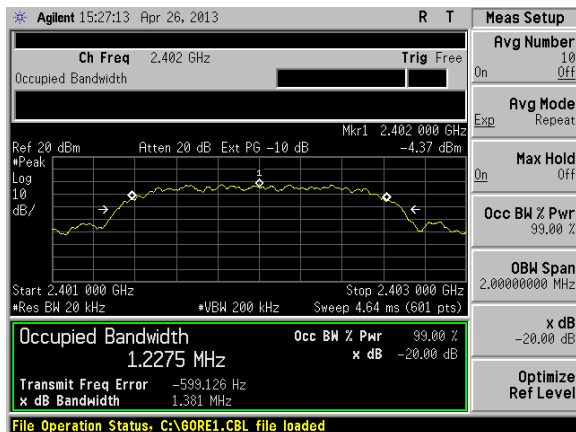

EDR2 Middle Channel



EDR2 Highest Channel

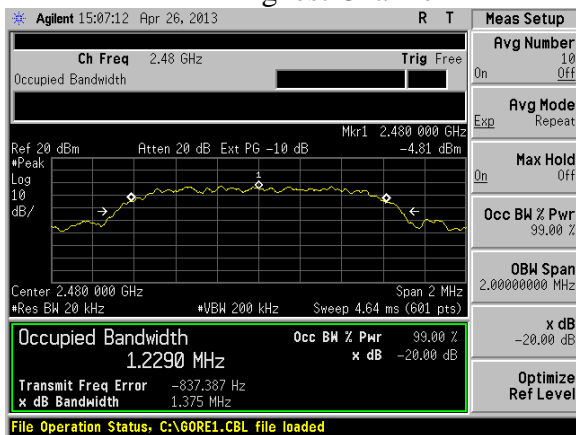

Prepared For: LS Research

Report: TR 313249 B FCCICTX (FHSS)


LSR: C-1808

Name: TiWi-BLECA


Model: TiWi-BLECA

Serial: Eng. Sample


EDR3 Low Channel

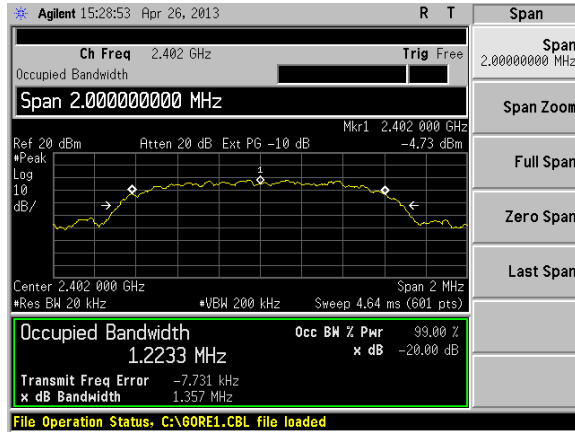

EDR3 Middle Channel

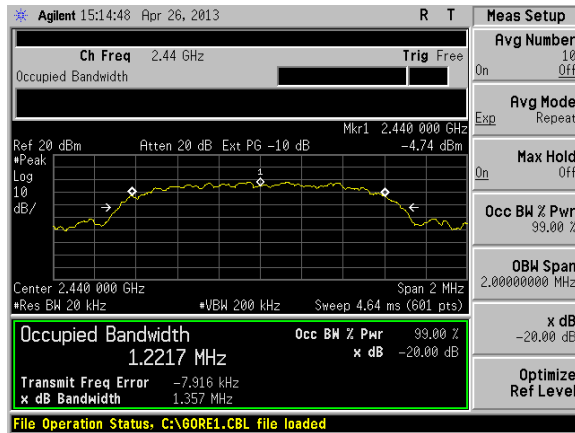

EDR3 Highest Channel

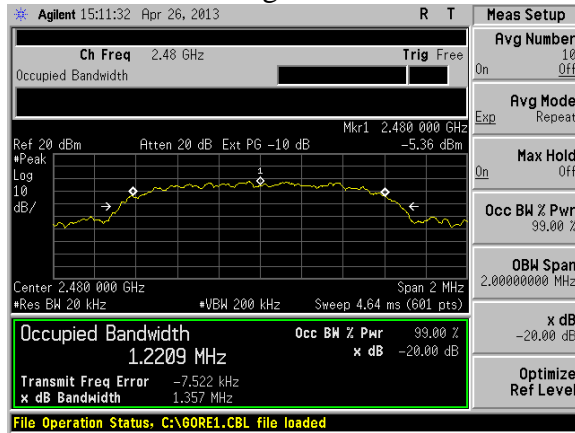

Prepared For: LS Research
 Report: TR 313249 B FCCICTX (FHSS)
 LSR: C-1808

Name: TiWi-BLECA
 Model: TiWi-BLECA
 Serial: Eng. Sample

Peak Output Power

GFSK mode:

Channel	Frequency (MHz)	Measured Power (dBm)
Lowest	2402	7.77
Middle	2441	7.61
Highest	2480	7.36

EDR2 mode:


Frequency (MHz)	Pout (dBm)	Limit (dBm)	Margin (dB)
2402.0	7.6	30.0	22.4
2440.0	7.8	30.0	22.2
2480.0	7.4	30.0	22.6

EDR3 mode:


Frequency (MHz)	Pout (dBm)	Limit (dBm)	Margin (dB)
2402.0	8.2	30.0	21.8
2440.0	8.5	30.0	21.5
2480.0	8.2	30.0	21.8

Plots


GFSK Mode Low Channel

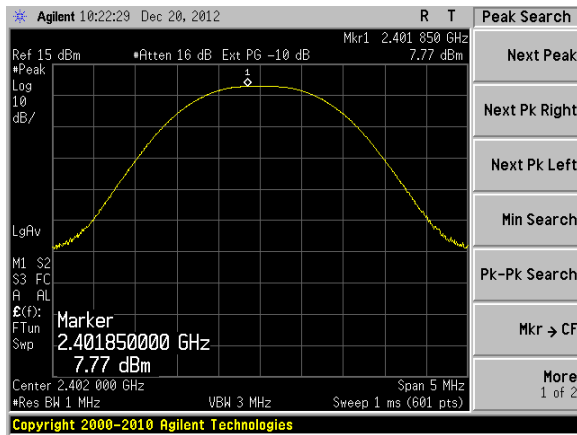

Middle Channel

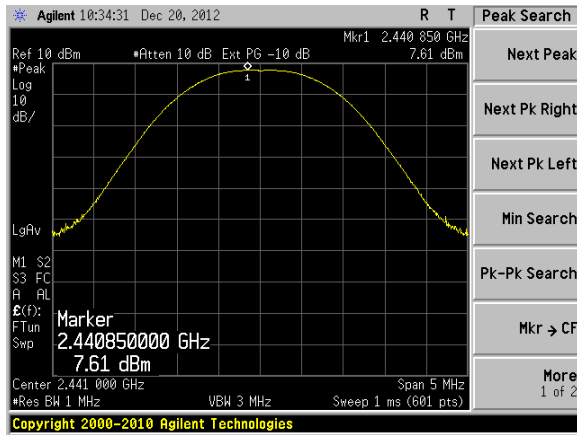

High Channel

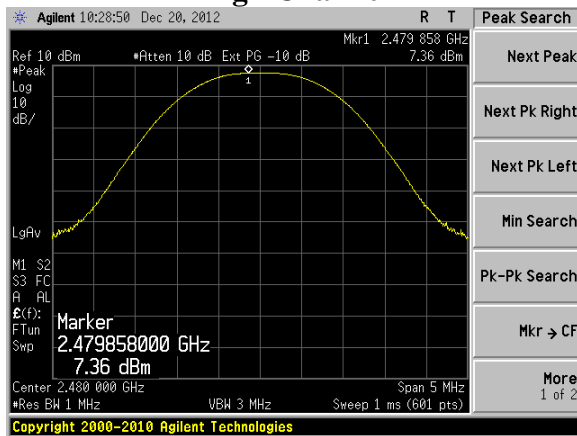

Prepared For: LS Research

Report: TR 313249 B FCCICTX (FHSS)


LSR: C-1808

Name: TiWi-BLECA


Model: TiWi-BLECA

Serial: Eng. Sample


EDR2 Mode Low Channel

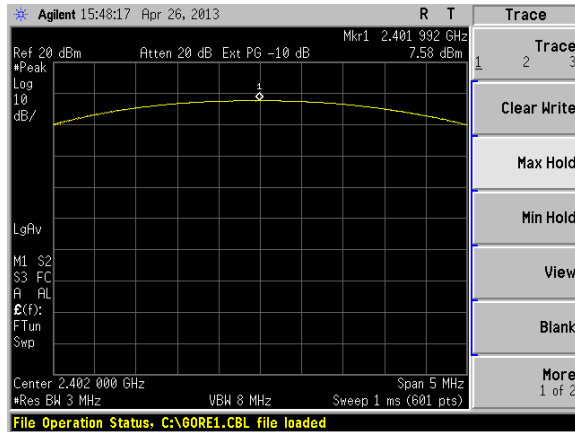

Middle Channel

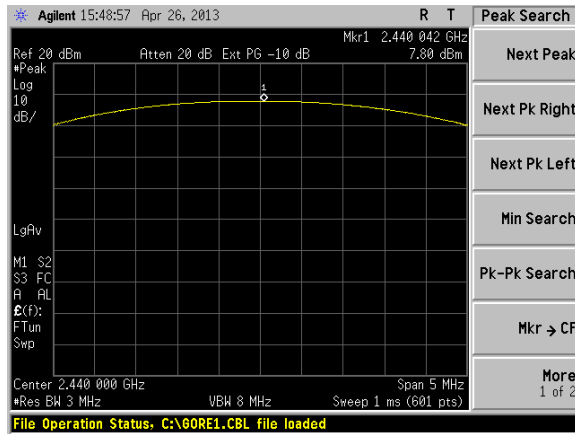

High Channel

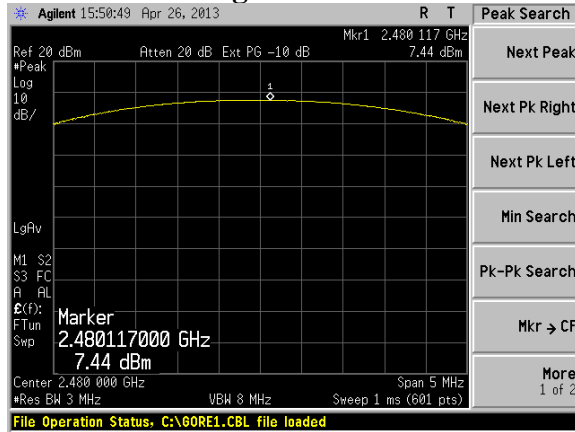

Prepared For: LS Research

Report: TR 313249 B FCCICTX (FHSS)


LSR: C-1808

Name: TiWi-BLECA


Model: TiWi-BLECA

Serial: Eng. Sample


EDR3 Mode Low Channel

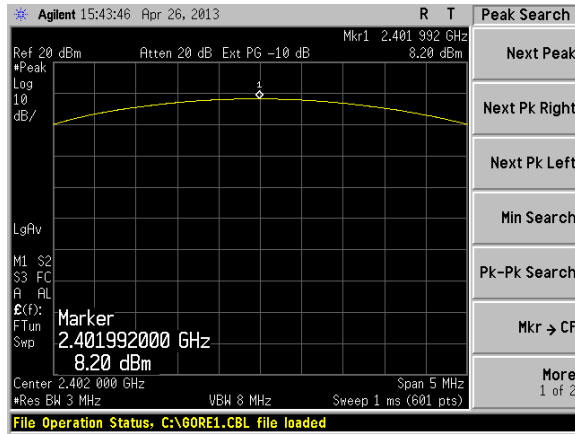

Middle Channel

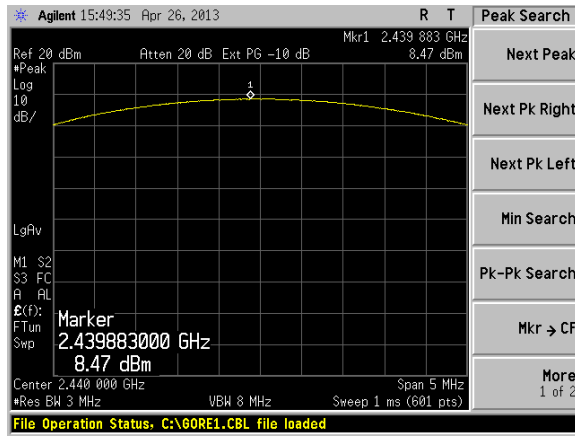

High Channel

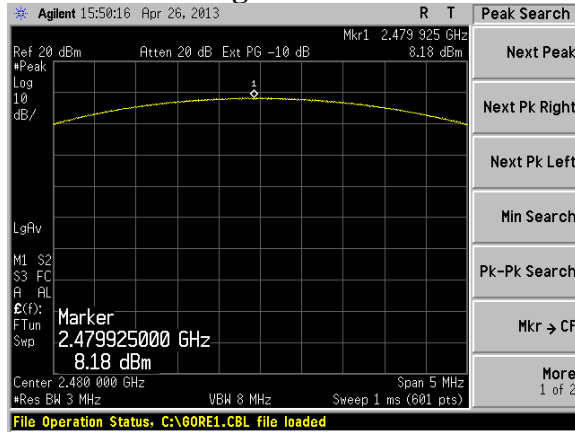

Prepared For: LS Research

Report: TR 313249 B FCCICTX (FHSS)

LSR: C-1808


Name: TiWi-BLECA

Model: TiWi-BLECA


Serial: Eng. Sample

Spurious Emissions

Channel 2402, shown from 30 MHz up to 1000 MHz

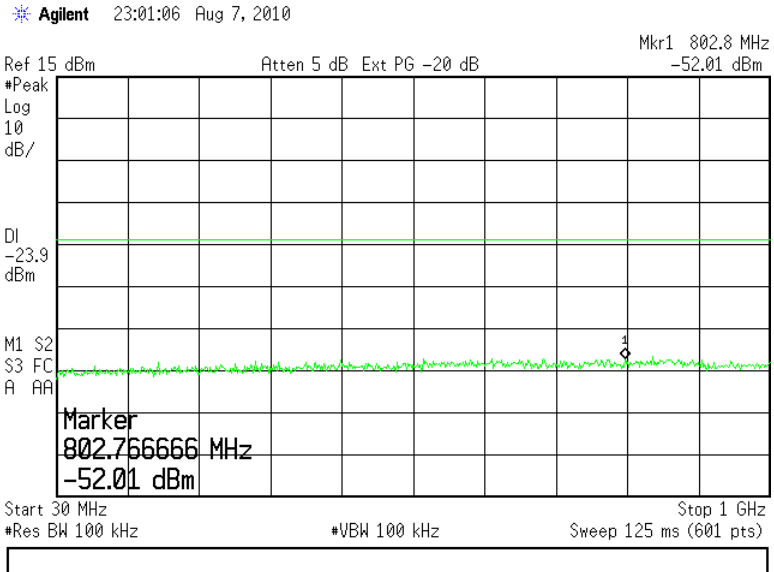


Channel 2402, shown from 1000 MHz up to 10000 MHz

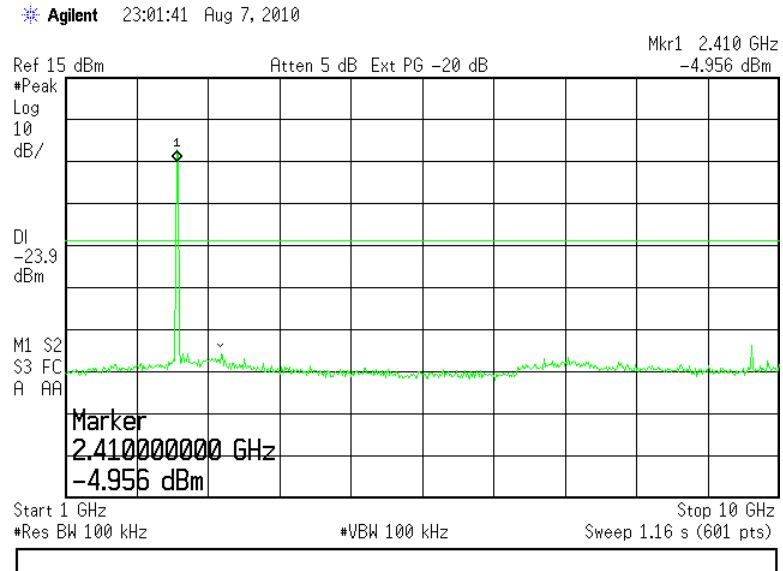

Prepared For: LS Research	Name: TiWi-BLECA
Report: TR 313249 B FCCICTX (FHSS)	Model: TiWi-BLECA
LSR: C-1808	Serial: Eng. Sample

Channel 2402, shown from 10000 MHz up to 25000 MHz

Agilent 23:02:35 Aug 7, 2010

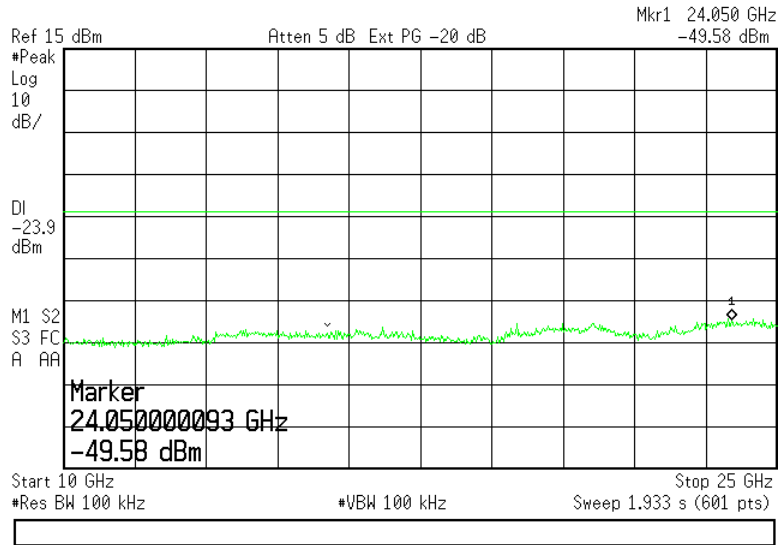

Prepared For: LS Research	Name: TiWi-BLECA
Report: TR 313249 B FCCICTX (FHSS)	Model: TiWi-BLECA
LSR: C-1808	Serial: Eng. Sample

Channel Plan and Separation

A spectrum analyzer was used with a resolution bandwidth of 30 kHz to measure the channel separation of the Bluetooth FHSS Radio on the TiWi product.

The minimum and maximum channel-separations measured for this device are 997.50 kHz and 1021.25 kHz respectively. The maximum occupied bandwidth of the device, as reported in the previous section is 875.00 kHz. The following plots describe this spacing, and also establish the channel separation and plan.

Data Table

RANGE (MHz)	# OF CHANS	Max separation (Hz)
2400 - 2410.5	9.0	997.50
2410.5 - 2420	9.5	1021.25
2420 - 2430	10.0	1000.00
2430 - 2440	10.0	1000.00
2440-2450	10.0	1000.00
2450-2460	10.0	1000.00
2460-2470	10.0	1000.00
2470-2483.5	10.5	1011.25


Summary Table

Total Chans	79
Max separation	1021.25
Min Separation	997.50

Screen Captures – Channel Separation


Channels 01 through 09

Agilent 00:30:19 Aug 10, 2010

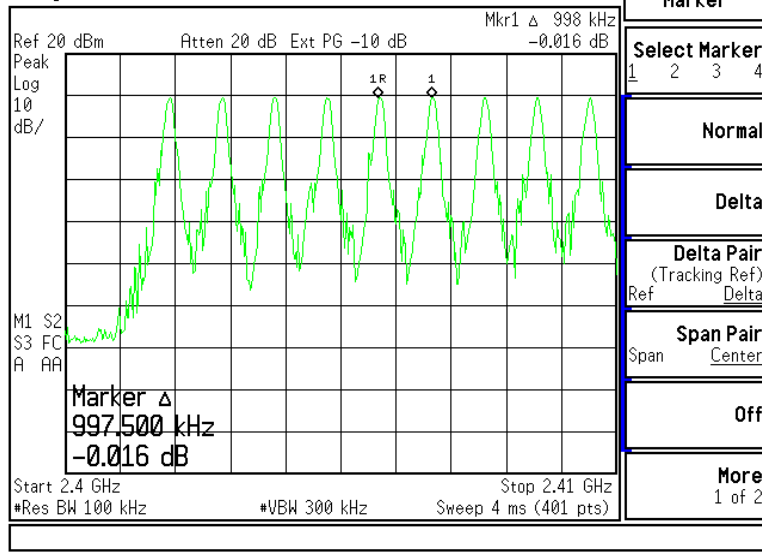

Channels 10 through 19

Agilent 00:34:04 Aug 10, 2010

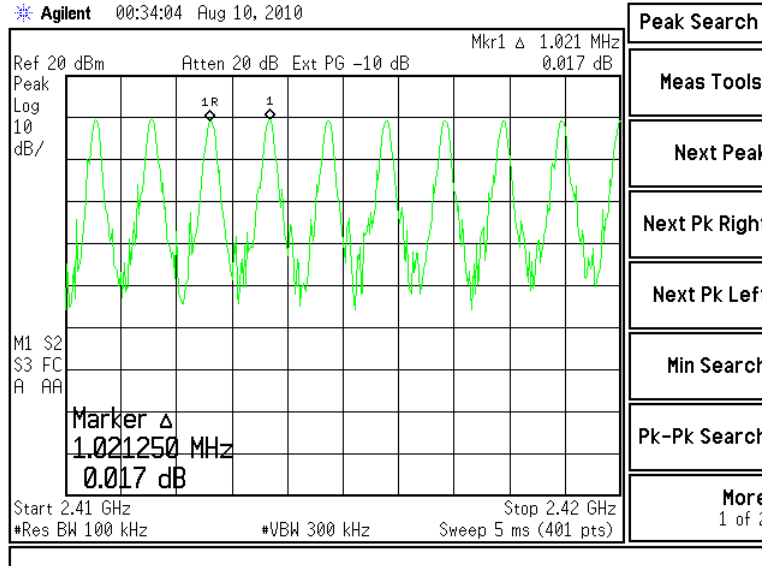

Prepared For: LS Research

Report: TR 313249 B FCCICTX (FHSS)

LSR: C-1808

Name: TiWi-BLECA


Model: TiWi-BLECA

Serial: Eng. Sample

Screen Captures – Channel Separation (continued)


Channels 19 through 29

Agilent 00:41:48 Aug 10, 2010

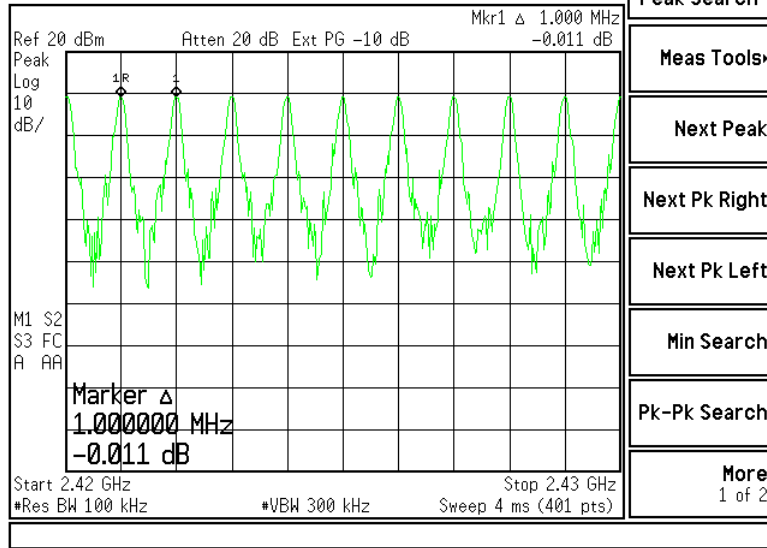

Channels 29 through 39

Agilent 00:54:54 Aug 10, 2010

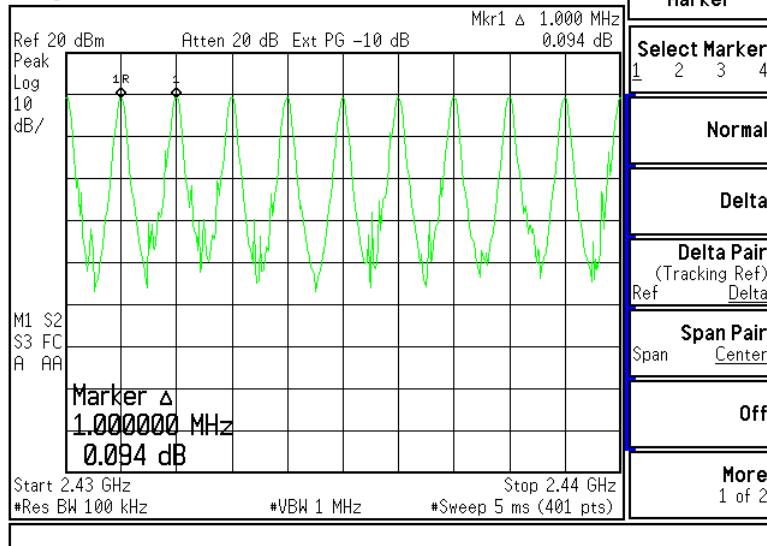

Prepared For: LS Research

Report: TR 313249 B FCCICTX (FHSS)

LSR: C-1808

Name: TiWi-BLECA


Model: TiWi-BLECA

Serial: Eng. Sample

Screen Captures – Channel Separation (continued)


Channels 39 through 49

Agilent 00:58:31 Aug 10, 2010

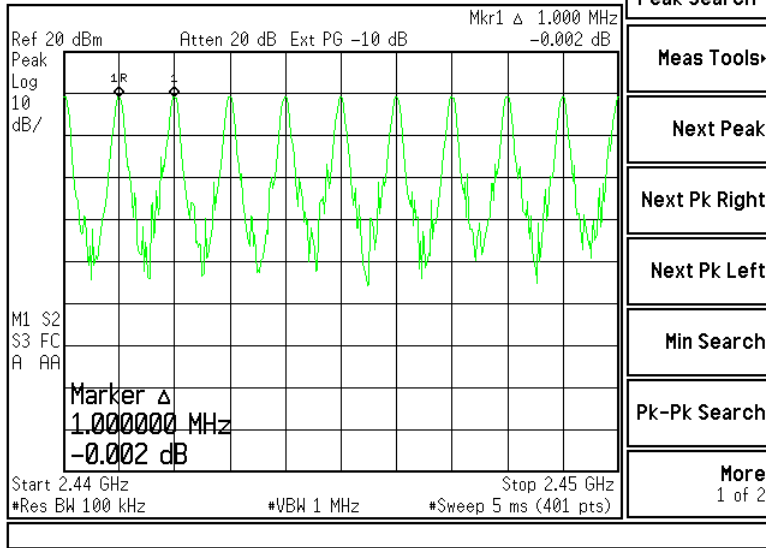

Channels 49 through 59

Agilent 01:02:11 Aug 10, 2010

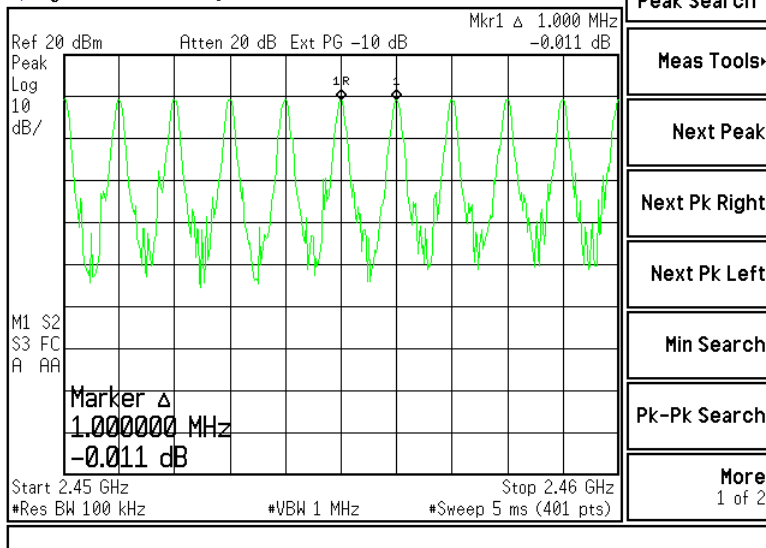

Prepared For: LS Research

Report: TR 313249 B FCCICTX (FHSS)

LSR: C-1808

Name: TiWi-BLECA


Model: TiWi-BLECA

Serial: Eng. Sample

Screen Captures – Channel Separation (continued)


Channels 59 through 69

Agilent 01:09:16 Aug 10, 2010

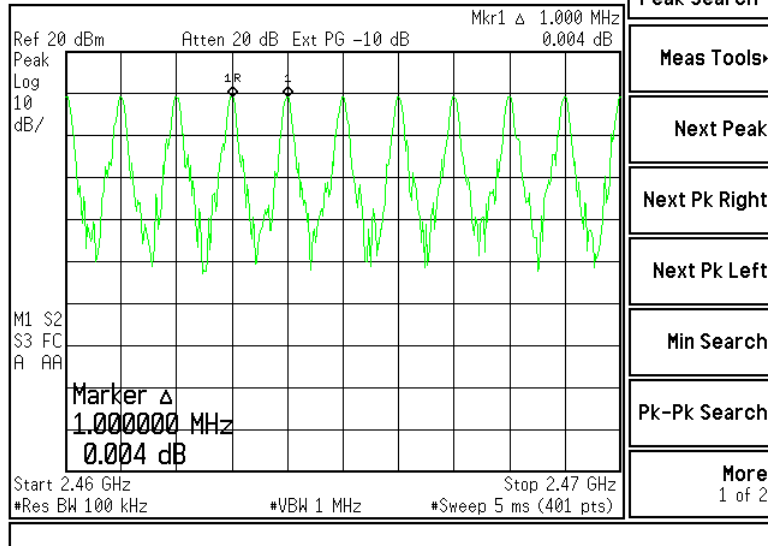

Channels 69 through 79

Agilent 01:13:33 Aug 10, 2010

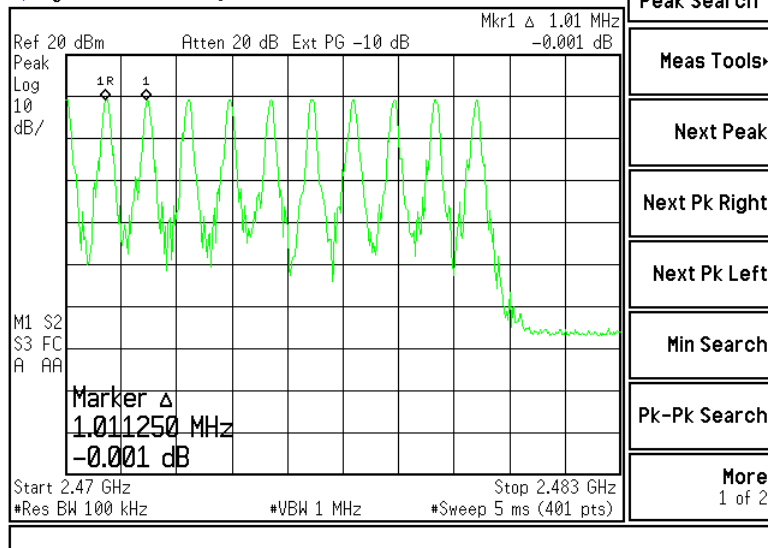

Prepared For: LS Research

Report: TR 313249 B FCCICTX (FHSS)

LSR: C-1808

Name: TiWi-BLECA

Model: TiWi-BLECA

Serial: Eng. Sample

B.2 – Radiated Emissions

Rule Part(s)	FCC: 15.247(d) / 15.205 / 15.209 / IC: RSS-210 A8.2 (b) / RSS-210 Section 2.2, 2.6, 2.7			
Measurement Procedure	ANSI C63.4 - 2003 FCC Public Notice DA00-705 March, 2000			
Test Location	LS Research, LLC - FCC Listed 3 meter Semi-Anechoic Chamber			
Test Distance	3 meters : 30 - 4000 MHz 1 meter: 4 - 25 GHz			
EUT Placement	80 cm height non-conductive table above reference ground plane			
Frequency Range of Measurement	Biconical: 30-300 MHz	Log Periodic Dipole Array: 300-1000 MHz	Double-Ridged Waveguide Horn: 1-18 GHz	Standard Gain Horn: 18-25GHz
Measurement Detectors	30-1000MHz Peak Detector RBW: 120 kHz VBW: 300 kHz		1 - 25 GHz: Peak Detector RBW : 1MHz VBW: 3MHz (Peak Measurement) VBW: 10Hz (Average Measurement)	
Description of Measurement	<p>1) The antenna, cable, pre-amp, and other necessary measurement system correction factors are loaded onto the EMI receiver / spectrum analyzer when the measurements are performed. The data is gathered and reported as the corrected values.</p> <p>2) The EUT is placed on a non-conductive pedestal centered on a turn-table in the test location with the antenna at the test distance from the EUT</p> <p>3) Maximum radiated RF emissions are determined by rotation of azimuth and scanning the sense antenna between 1 and 4 meters in height using both horizontal and vertical antenna polarities. Maximized levels are manually noted at degree values of azimuth and at sense antenna height.</p>			
Example Calculations	Reported Measurement data = Raw receiver measurement + Antenna Correction Factor + Cable factor (dB) - amplification factor (when applicable) + Additional factor (when applicable)			

FCC Part 15.209 / IC RSS-210 Section 2.7 Limits:

Frequency (MHz)	3 m Limit ($\mu\text{V/m}$)	3 m Limit (dB $\mu\text{V/m}$)	Type
30-88	100	40.0	Quasi-Peak
88-216	150	43.5	Quasi-Peak
216-960	200	46.0	Quasi-Peak
Above 960	500	54.0	Average (>1 GHz)

Prepared For: LS Research	Name: TiWi-BLECA
Report: TR 313249 B FCCICTX (FHSS)	Model: TiWi-BLECA
LSR: C-1808	Serial: Eng. Sample

B.2.1 – Radiated Harmonics in Restricted Bands above 1 GHz

Manufacturer	LS Research
Date	8-15-2012 and 8-22-12
Operator	Adam A / Mike H
Temp. / R.H.	20 - 25° C / 30-60% R.H.
Test Voltage	3.3 VDC
Test Location	LS Research, LLC - FCC Listed 3 meter Semi-Anechoic Chamber
Rule Part	15.247 / 15.205 / 15.209
Measurement Procedure	ANSI C63.4 - 2003 FCC Public Notice DA00-705 March, 2000
Test Distance	3 meter (1-4 GHz) 1 meter (4-25 GHz)
EUT Placement	80 cm height non-conductive table centered on turn-table
Detectors	RBW 1MHz; Peak (VBW 3MHz); Average (VBW 10Hz)
Additional Notes	<ol style="list-style-type: none"> 1) Tested in the worst case of continuous transmit GFSK modulated mode for radiated harmonics in restricted bands in low, mid, and high channels with EUT Antenna in three orthogonal positions. 2) Peak measurements are made and then the duty cycle correction is applied to get the calculated average. Peak measurements are compared to the peak limit and the calculated average is compared to the average limit.

Table:
Bluetooth Radiated Harmonics in restricted bands


	Frequency (MHz)	Height (m)	Azimuth (degree)	Peak Reading (dBµV/m)	Duty Cycle Correction (dB)	Avg Calculated (dBµV/m)	Avg Limit (dBµV/m)	Margin (dB)	Antenna Polarity	EUT orientation
Low	4804	1.06	248	72.22	20	52.22	63.5	11.3	Vertical	Side
	12010	1.09	350	55.95	20	35.95	63.5	27.6	Horizontal	Side
	19216	1.00	207	58.59	20	38.59	63.5	24.9	Vertical	Side
Mid	4880	1.00	66	68.21	20	48.21	63.5	15.3	Horizontal	Flat
	7320	1.18	201	56.79	20	36.79	63.5	26.7	Vertical	Side
	12200	1.05	352	57.12	20	37.12	63.5	26.4	Horizontal	Side
	19520	1.00	0	60.49	20	40.49	63.5	23.0	Vertical	Side
High	4960	1.00	171	61.57	20	41.57	63.5	21.9	Horizontal	Vertical
	7440	1.04	237	55.81	20	35.81	63.5	27.7	Horizontal	Vertical
	12400	1.02	163	54.59	20	34.59	63.5	28.9	Horizontal	Side
	19840	1.00	9	63.05	20	43.05	63.5	20.5	Vertical	Side
	22320	1.00	1.08	59.47	20	39.47	63.5	24.0	Vertical	Flat

Prepared For: LS Research	Name: TiWi-BLECA
Report: TR 313249 B FCCICTX (FHSS)	Model: TiWi-BLECA
LSR: C-1808	Serial: Eng. Sample


Plots:

Bluetooth Radiated Harmonics in restricted bands


4-18 GHz Average, Vertical, EUT Side, Channel 0, GFSK max power

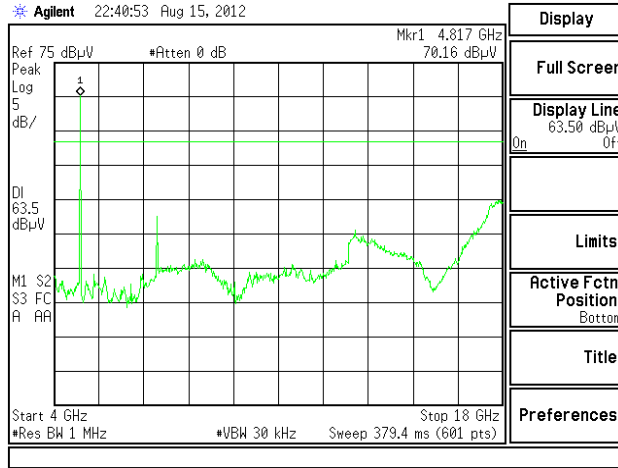

18-25 GHz, Vertical, EUT Flat, Channel 39, GFSK max power

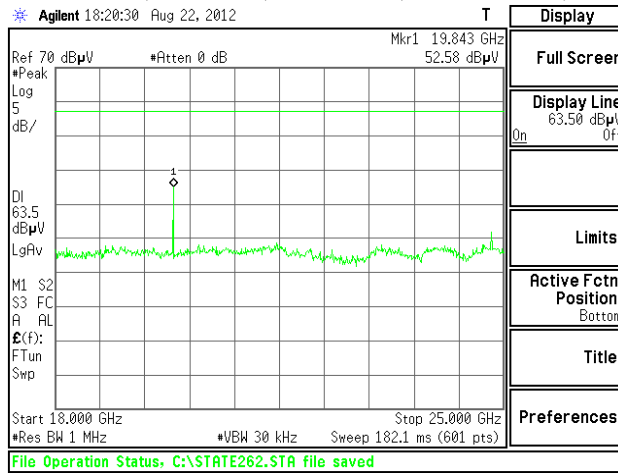

Average

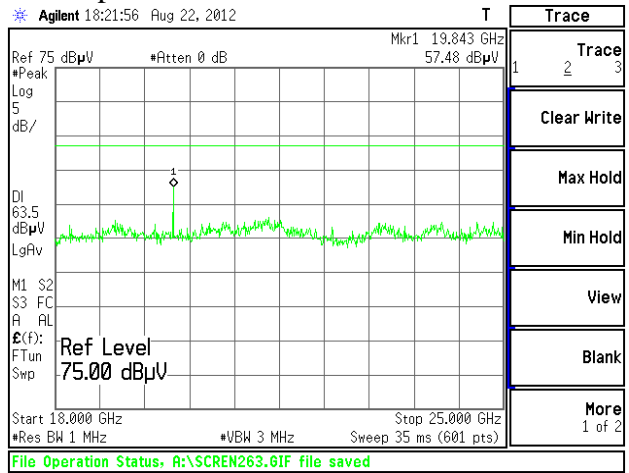

Peak

B2.2 - Radiated Band-edge into restricted bands

Manufacturer	LS Research
Date	8-21-12
Operator	Adam A
Temp. / R.H.	20 - 25° C / 30-60% R.H.
Test Voltage	3.3 VDC
Test Location	LS Research, LLC - FCC Listed 3 meter Semi-Anechoic Chamber
Rule Part	15.247 / 15.205 / 15.209
Measurement Procedure	ANSI C63.4 - 2003 FCC Public Notice DA00-705 March, 2000
Test Distance	3 meter
EUT Placement	80 cm height non-conductive table
Detectors	RBW 1MHz; Peak (VBW 3MHz); Average (VBW 10Hz)
Additional Notes	<ol style="list-style-type: none"> 1) Tested in continuous transmit modulated mode in low and high channels with EUT Antenna in three orthogonal positions. 2) Maximum levels recorded.

Example Calculation:

Peak Limit – Peak Reading = Peak Margin

Average Limit – Average Reading = Average Margin

Lower Band-edge 2310 – 2390 MHz


EUT Channel	EUT Mode	EUT Power*	Peak (dBµV/m)	Peak Limit (dBµV/m)	Peak Margin (dB)	Average (dBµV/m)	Average Limit (dBµV/m)	Average Margin (dB)
0	GFSK	Max	57.65	74	16.4	44.75	54	9.3
0	EDR3	Max	60.98	74	13.0	44.77	54	9.2

Upper Band-edge 2483.5 – 2500 MHz


EUT Channel	EUT Mode	EUT Power*	Peak (dBµV/m)	Peak Limit (dBµV/m)	Peak Margin (dB)	Average (dBµV/m)	Average Limit (dBµV/m)	Average Margin (dB)
39	GFSK	Max	59.5	74	14.5	46.55	54	7.5
39	EDR3	Max	63.63	74	10.4	49.33	54	4.7

**Plots:
Radiated Lower Band-edge into restricted bands**

GFSK

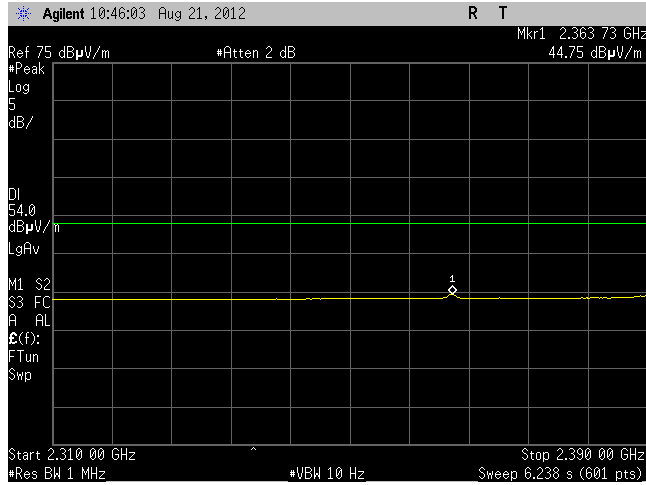


Average

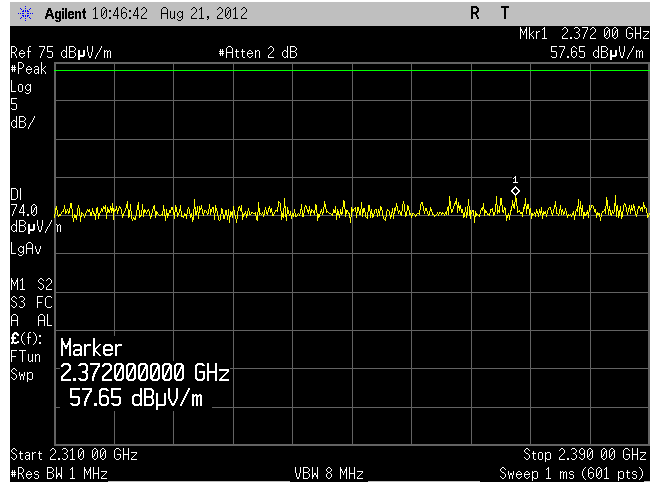


Peak

EDR3

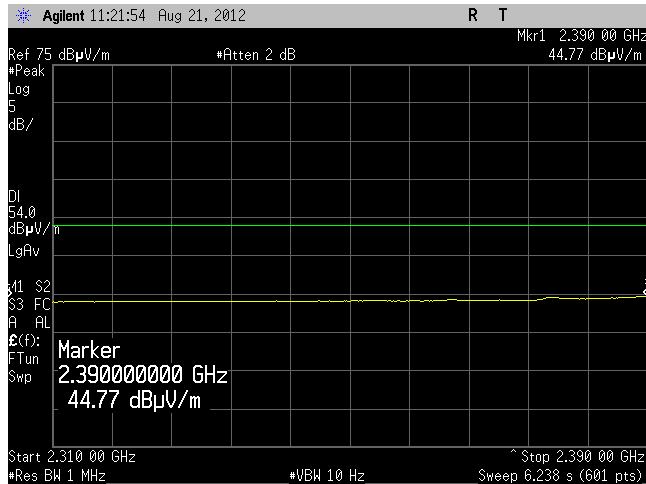

Average

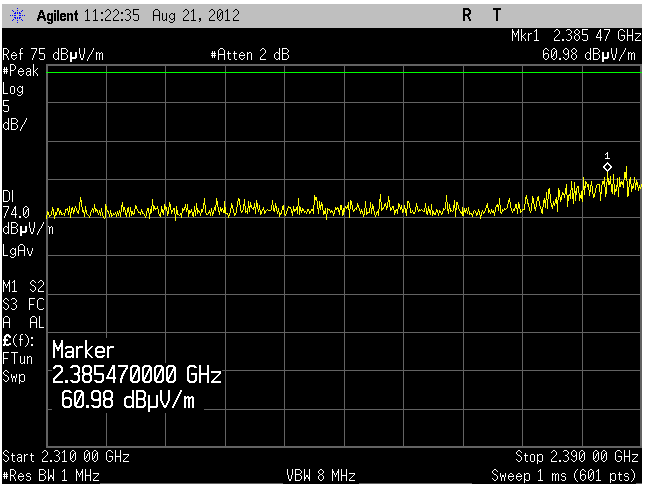


Peak


Prepared For: LS Research	Name: TiWi-BLECA
Report: TR 313249 B FCCICTX (FHSS)	Model: TiWi-BLECA
LSR: C-1808	Serial: Eng. Sample

Radiated Upper Band-edge into restricted bands

GFSK

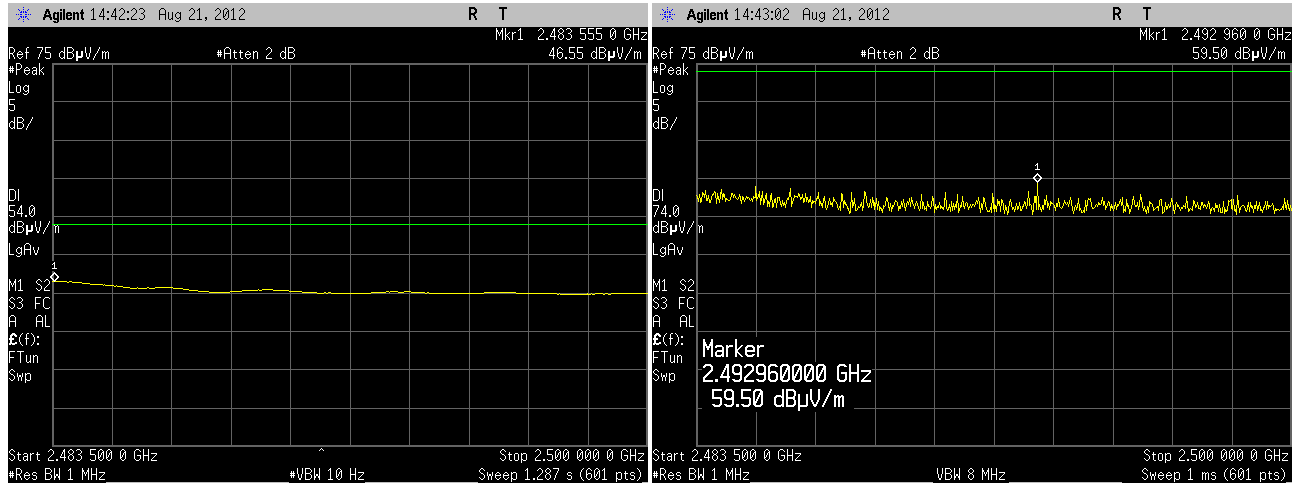

EDR3

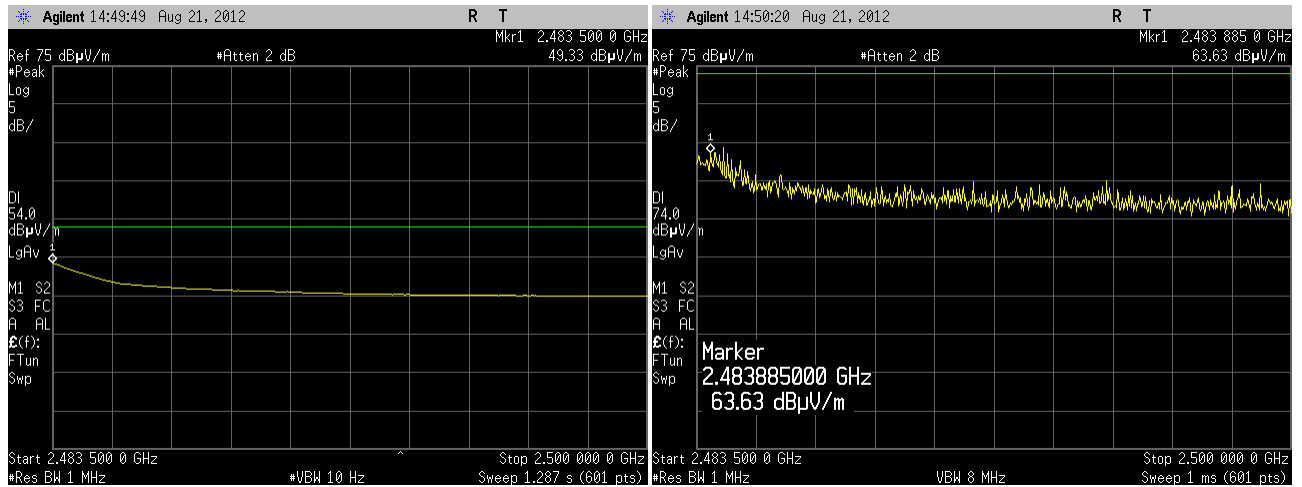

Prepared For: LS Research

Report: TR 313249 B FCCICTX (FHSS)

LSR: C-1808

Name: TiWi-BLECA

Model: TiWi-BLECA

Serial: Eng. Sample

B.2.3 – Receive Mode Radiated Emissions

Manufacturer	LS Research
Date	8-21 to 8-23 0212
Operator	Peter F / Mike H
Temperature	20 - 25° C
Humidity	30 – 60%
Test Voltage	3.3 VDC
Test Location	LS Research, LLC - FCC Listed 3 meter Semi-Anechoic Chamber
Test Distance	3 meter (30 MHz to 4 GHz) 1 meter (4 GHz to 25 GHz)
EUT Placement	80 cm height non-conductive table
Measurements	Final
Detectors	Peak, Quasi-Peak, Average (VBW 10Hz)
Additional Notes	1) Emissions 30-4000MHz tested in receive mode on low, mid, high channels in three orientations. No significant difference noted in emissions from mode or channel selection. Worst case reported. 2) Emissions 4-25 GHz tested in Bluetooth receive mode on low, mid, high channels in three orientations.

30-4000MHz

Frequency (MHz)	Height (m)	Azimuth (degree)	Quasi Peak Reading (dBµV/m)	Quasi Peak Limit (dBµV/m)	Margin (dB)	Antenna Polarity	EUT orientation	NOTES
72.1	3.93	352	33.2	40.0	6.9	H	FLAT	1
72.1	1.04	72	34.2	40.0	5.8	V	FLAT	1
72.1	3.81	0	31.0	40.0	9.0	H	V	1
72.1	1.00	0	33.1	40.0	6.9	V	V	1
984.9	1.00	0	28.0	54.0	26.0	V	V	2
998.9	1.00	0	29.1	54.0	24.9	H	V	2
966.0	1.00	0	28.5	54.0	25.5	H	SIDE	2
993.0	1.00	0	28.4	54.0	25.6	V	SIDE	2
975.5	1.00	0	27.79	54.0	26.2	V	FLAT	2
999.3	1.00	0	29.05	54.0	25.0	H	FLAT	2

Note 1: NOT A FUNCTION OF EUT CHANNEL, OR POWER LEVEL; LIKELY RELATED TO THE POWER SUPPLY

Note 2: Noise Floor

Prepared For: LS Research	Name: TiWi-BLECA
Report: TR 313249 B FCCICTX (FHSS)	Model: TiWi-BLECA
LSR: C-1808	Serial: Eng. Sample



Receive Mode 4-25 GHz

Frequency (MHz)	Height (m)	Azimuth (degree)	Peak Reading (dBμV/m)	Average Reading (dBμV/m)	Average Limit (dBμV/m)	Margin (dB)	Antenna Polarity	EUT orientation	EUT Channel
4803.0	1.12	186	51.45	40.1	63.5	23.4	H	V	0
4803.0	1.00	298	51.88	39.88	63.5	23.6	H	S	0
4803.0	1.00	348	51.68	40.14	63.5	23.4	H	F	0
19211.0	1.00	329	52.8	41.69	63.5	21.8	H	V	0
19211.0	1.00	309	52.01	41.82	63.5	21.7	H	S	0
19211.0	1.00	207	52.63	42.65	63.5	20.9	V	S	0
19211.0	1.00	46	53.5	43.41	63.5	20.1	V	F	0
19211.0	1.00	325	53.96	42.62	63.5	20.9	H	F	0
 									
4879.0	1.06	243	49.28	39.96	63.5	23.5	H	V	19
4879.0	1.25	131	48.54	35.95	63.5	27.6	H	S	19
4879.0	1.00	204	48.18	37.38	63.5	26.1	H	F	19
4879.0	1.00	341	48.92	39.41	63.5	24.1	V	F	19
19515.0	1.00	180	52.82	41.97	63.5	21.5	H	F	19
19515.0	1.00	325	53.53	42.92	63.5	20.6	V	F	19
19515.0	1.00	291	52.98	41.66	63.5	21.8	H	S	19
19515.0	1.02	227	52.92	43.44	63.5	20.1	V	S	19
19515.0	1.00	326	52.7	42.99	63.5	20.5	H	V	19
19515.0	1.00	46	52.78	42.27	63.5	21.2	V	V	19
 									
4959.0	1.06	267	49.65	38.53	63.5	25.0	H	V	39
4959.0	1.00	0	48.73	37.73	63.5	25.8	H	F	39
4959.0	1.09	166	49.31	38.66	63.5	24.8	V	F	39
19835.0	1.05	346	52.42	41.9	63.5	21.6	H	V	39
19835.0	1.00	323	52.06	41.09	63.5	22.4	V	V	39
19535.0	1.00	38	52.1	40.77	63.5	22.7	H	S	39
19835.0	1.00	11	53.28	42.65	63.5	20.9	V	S	39
19835.0	1.00	330	53.09	44.15	63.5	19.4	H	F	39
19835.0	1.00	119	52.5	41.31	63.5	22.2	V	F	39

Plots:

Tested in three orthogonal positions



300-1000MHz

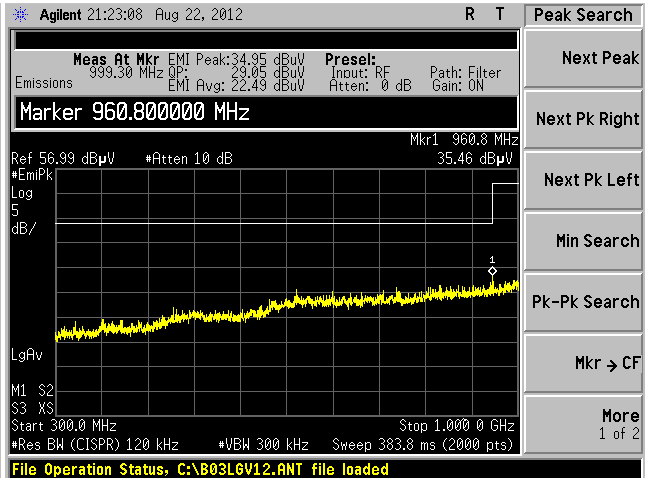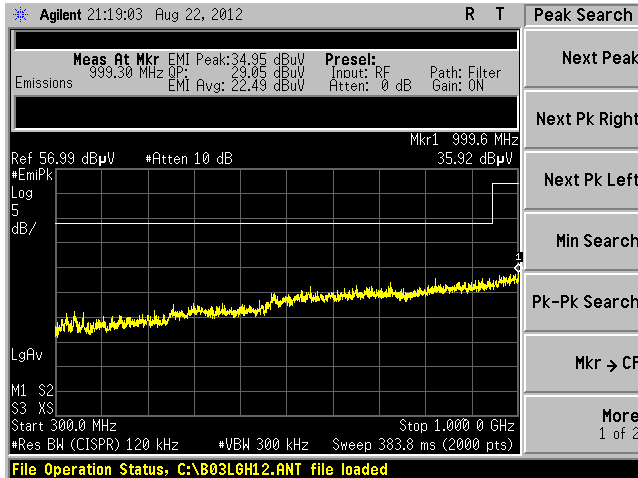

Horizontal

Vertical


30-300MHz

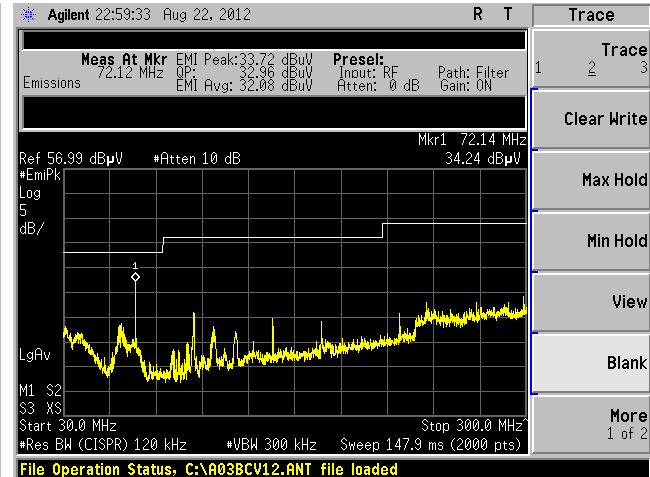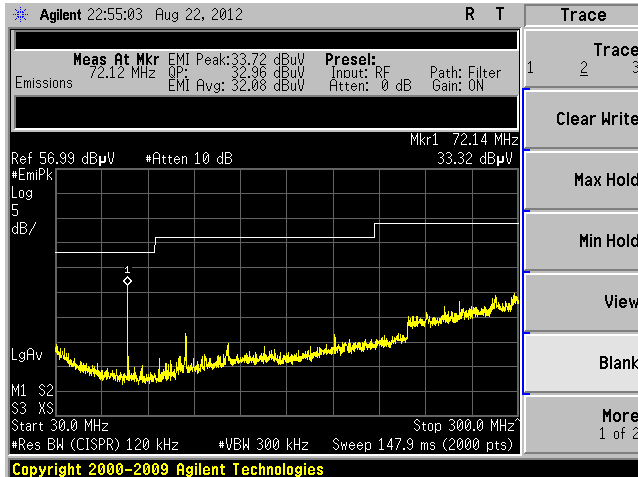

Horizontal

Vertical

1000-4000MHz

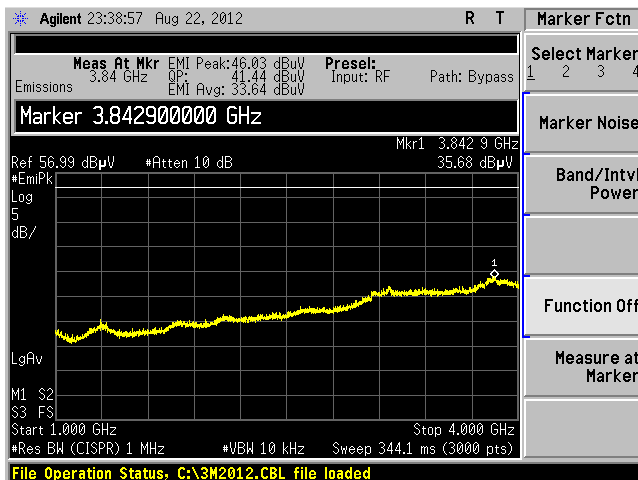


Prepared For: LS Research
Report: TR 313249 B FCCICTX (FHSS)
LSR: C-1808

Name: TiWi-BLECA
Model: TiWi-BLECA
Serial: Eng. Sample

Horizontal – Reduced VBW

Bluetooth Receive Mode 4-25 GHz


4-18 GHz Receive Mode, Vertical, EUT Flat, Channel 19

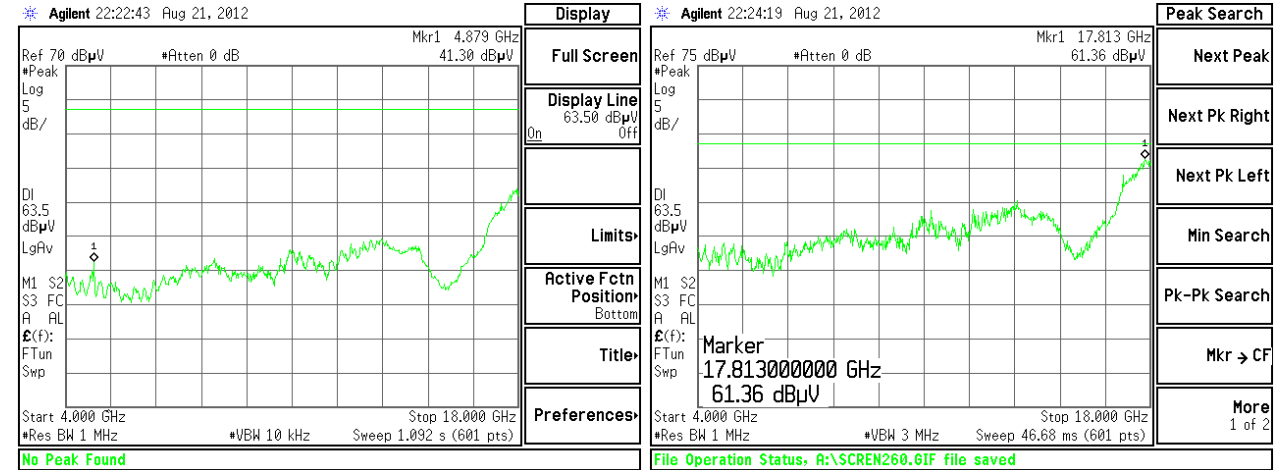

Average

Peak

18 - 25 GHz Receive Mode, Horizontal, EUT Flat, Channel 39

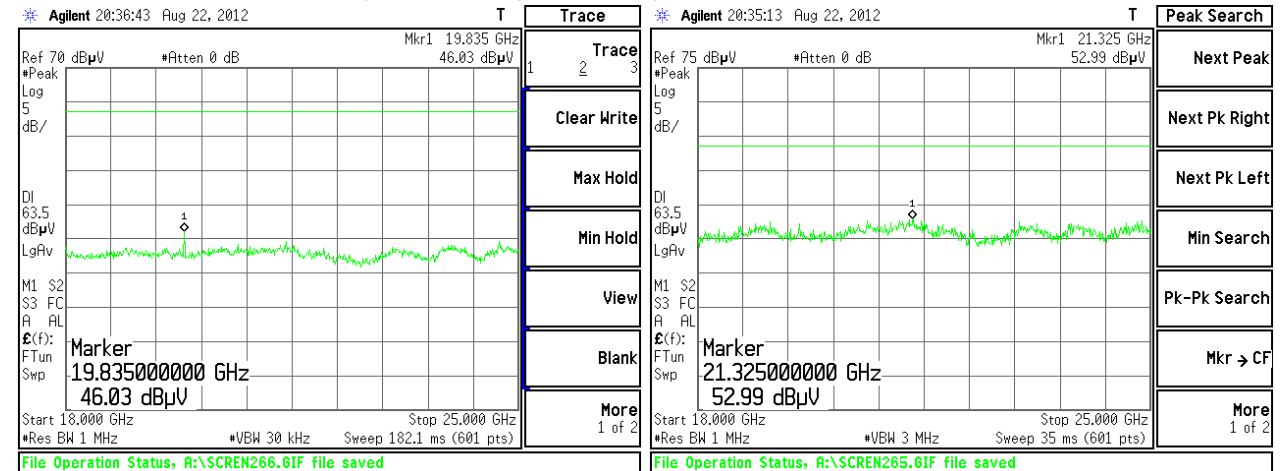

Average

Peak

Prepared For: LS Research	Name: TiWi-BLECA
Report: TR 313249 B FCCICTX (FHSS)	Model: TiWi-BLECA
LSR: C-1808	Serial: Eng. Sample

B.3 – AC Mains Emissions

Test Setup

The test area and setup are in accordance with ANSI C63.4-2003 and with Title 47 CFR, FCC Part 15, Industry Canada RSS-210 and RSS GEN. The EUT was placed on a non-conductive wooden table, with a height of 80 cm above the reference ground plane. The EUT's power cable was plugged into a 50Ω (ohm), Line Impedance Stabilization Network (LISN). The AC power supply of 120V was provided inside the 3 Meter Semi-Anechoic Chamber via an appropriate broadband EMI Filter, and then to the LISN line input. Final readings were then taken and recorded. After the EUT was setup and connected to the LISN, the RF Sampling Port of the LISN was connected to a 10 dB Attenuator-Limiter, and then to the EMI Receiver. The LISN used has the ability to terminate the unused port with a 50Ω (ohm) load when switched to either L1 (line) or L2 (neutral).

Test Procedure

The EUT was investigated in continuous modulated transmit mode for this portion of the testing. The appropriate frequency range and bandwidths were selected on the EMI Receiver, and measurements were made. The bandwidth used for these measurements is 9 kHz, as specified in CISPR 16-1, Section 1, Table 1, for Quasi-Peak and Average detectors in the frequency range of 150 kHz to 30 MHz. Final readings were then taken and recorded.

Test Equipment Utilized

A list of the test equipment and accessories utilized for the Conducted Emissions test is provided in Appendix A.

Test Results

The EUT was found to **MEET** the Conducted Emission requirements of FCC Part 15.207 and 15.107 Conducted Emissions for an Intentional Radiator as well as IC RSS 210 and RSS GEN. See the Data Charts and Graphs for more details of the test results.

Prepared For: LS Research	Name: TiWi-BLECA
Report: TR 313249 B FCCICTX (FHSS)	Model: TiWi-BLECA
LSR: C-1808	Serial: Eng. Sample

FCC Limits of Conducted Emissions at the AC Mains Ports

The follow table represents the limits for Conducted Emissions Class B taken from CFR 15.207:

Frequency Range (MHz)	Quasi-Peak Limit (dBµV)	Average Limit (dBµV)
0.150 -0.50 *	66-56	56-46
0.5 – 5.0	56	46
5.0 – 30	60	50
* The limit decreases linearly with the logarithm of the frequency in this range.		

Sample calculation for the limits in the 0.15 to 0.5 MHz:

$$\text{Limit} = -19.12 (\text{Log}_{10} (\text{F} [\text{MHz}] / 0.15 [\text{MHz}])) + 66.0 \text{ dB}\mu\text{V}$$

For a frequency of 200 kHz for example:

$$\text{Quasi-Peak Limit (F=200 kHz)} = -19.12 (\text{Log}_{10} (0.2[\text{MHz}] / 0.15 [\text{MHz}])) + 66.0 \text{ dB}\mu\text{V}$$

$$\text{Quasi-Peak Limit (F=200 kHz)} = 63.6 \text{ dB}\mu\text{V}$$

$$\text{Average Limit (F=200 kHz)} = -19.12 (\text{Log}_{10} (0.2[\text{MHz}]/0.15[\text{MHz}])) + 56.0 \text{ dB}\mu\text{V}$$

$$\text{Average Limit (F = 200 kHz)} = 53.6 \text{ dB}\mu\text{V}$$

Conducted Emissions Test Data Chart

Frequency Range inspected: 150 KHz to 30 MHz

Test Standard: FCC 15.207 Class B

IC RSS GEN 7.2.2

Manufacturer:	LS Research				
Date(s) of Test:	September 28, 2010				
Test Engineer:	Peter Feilen				
Voltage:	5VDC				
Operation Mode:	Continuous Transmit/Receive				
Environmental Conditions in the Lab:	Temperature: 20 – 25° C Relative Humidity: 30 – 60 %				
Test Location:	<input checked="" type="checkbox"/>	Other	<input type="checkbox"/>	<input type="checkbox"/>	Chamber
EUT Placed On:	<input checked="" type="checkbox"/>	40cm from Vertical Ground Plane	<input type="checkbox"/>	<input type="checkbox"/>	10cm Spacers
	<input checked="" type="checkbox"/>	80cm above Ground Plane	<input type="checkbox"/>	<input type="checkbox"/>	Other:
Measurements:	<input type="checkbox"/>	Pre-Compliance	<input type="checkbox"/>	Preliminary	<input checked="" type="checkbox"/> Final
Detector Used:	<input checked="" type="checkbox"/>	Peak	<input checked="" type="checkbox"/>	Quasi-Peak	<input checked="" type="checkbox"/> Average

			<i>QUASI-PEAK</i>			<i>AVERAGE</i>		
Frequency (MHz)	Radio	Line	Reading (dBμV)	Limit (dBμ V)	Margin (dB)	Reading (dBμV)	Limit (dBμ V)	Margin (dB)
0.157	BT	TX1	29.03	65.62	36.59	6.89	55.62	48.73
0.161	BT	TX1	29.51	65.41	35.90	6.31	55.41	49.10
0.157	BT	TX2	28.8	65.62	36.82	6.53	55.62	49.09
0.154	BT	TX2	28.84	65.78	36.94	6.61	55.78	49.17
0.165	BT	RX2	16.57	65.21	48.64	4.51	55.21	50.70
0.167	BT	RX1	21.18	65.11	43.93	5.56	55.11	49.55


Notes:

- 1) All other emissions were better than 20 dB below the limits.
- 2) The EUT exhibited similar emissions in transmit and receive modes, and across the Low, Middle and High channels tested.


Prepared For: LS Research	Name: TiWi-BLECA
Report: TR 313249 B FCCICTX (FHSS)	Model: TiWi-BLECA
LSR: C-1808	Serial: Eng. Sample

Screen Captures – Conducted Emissions Test

Bluetooth Transmit mode:

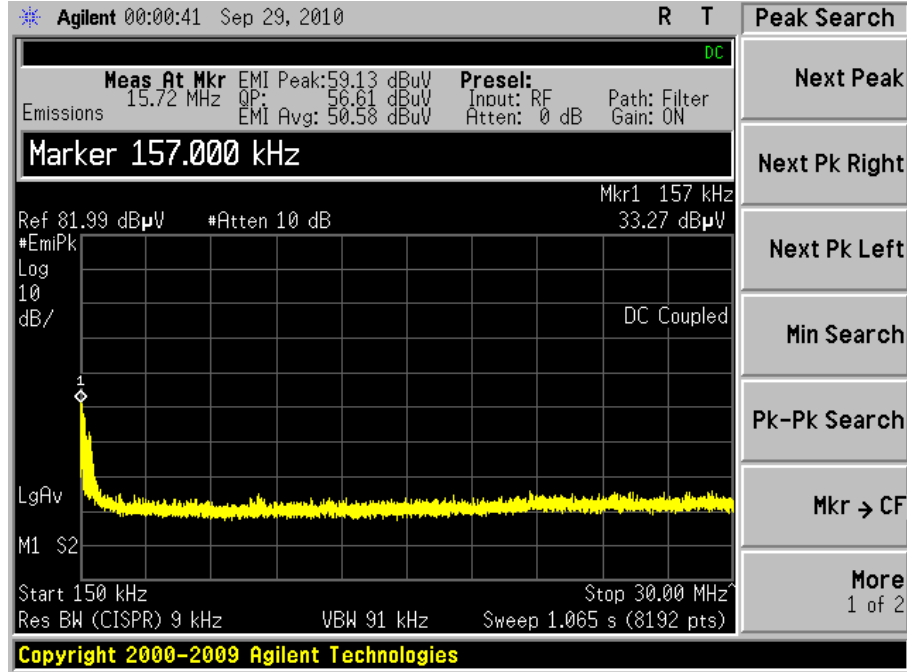


LINE 1

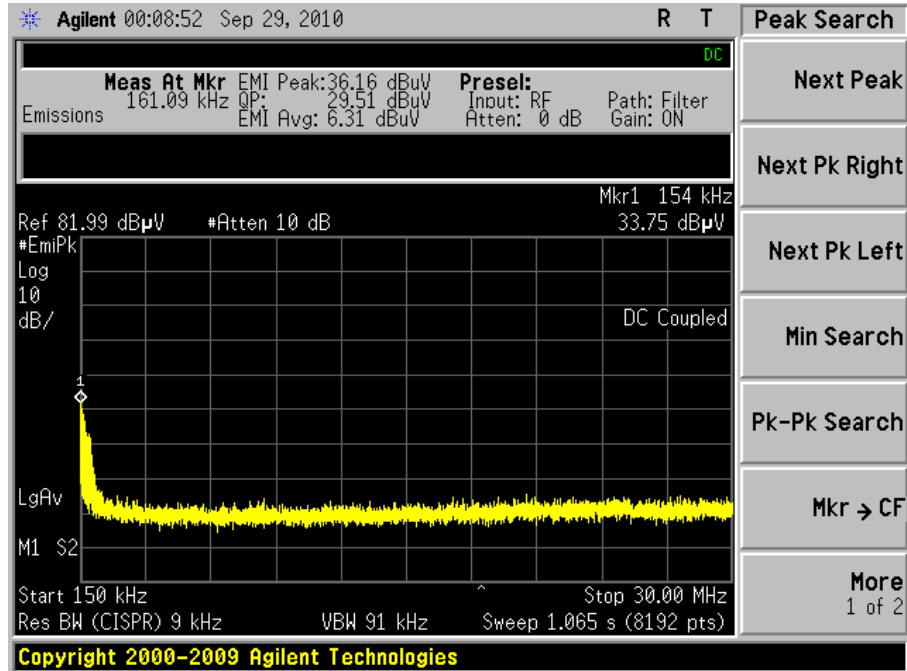


LINE 2

Prepared For: LS Research	Name: TiWi-BLECA
Report: TR 313249 B FCCICTX (FHSS)	Model: TiWi-BLECA
LSR: C-1808	Serial: Eng. Sample

Bluetooth Receive mode:

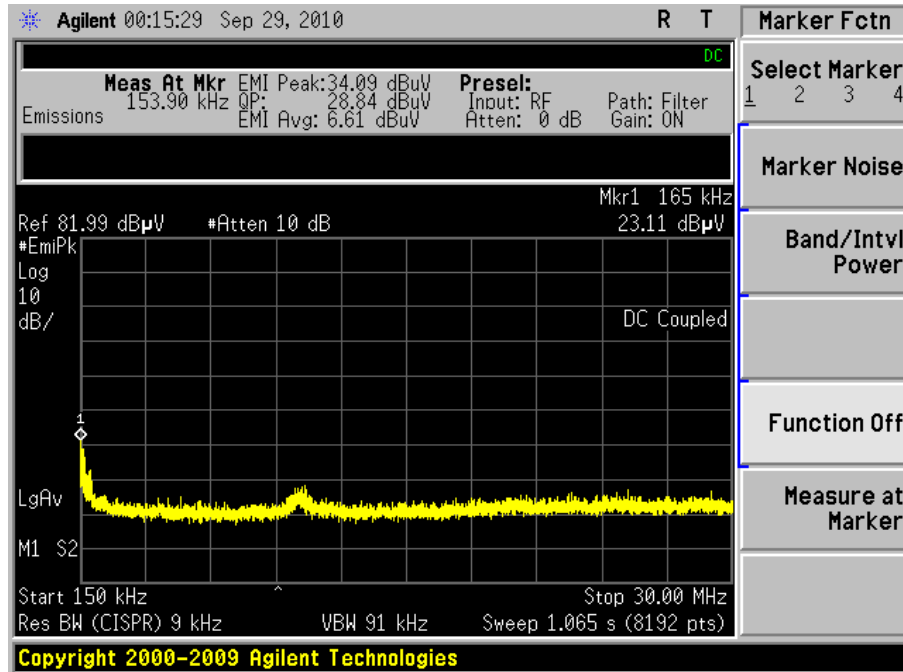

LINE 1

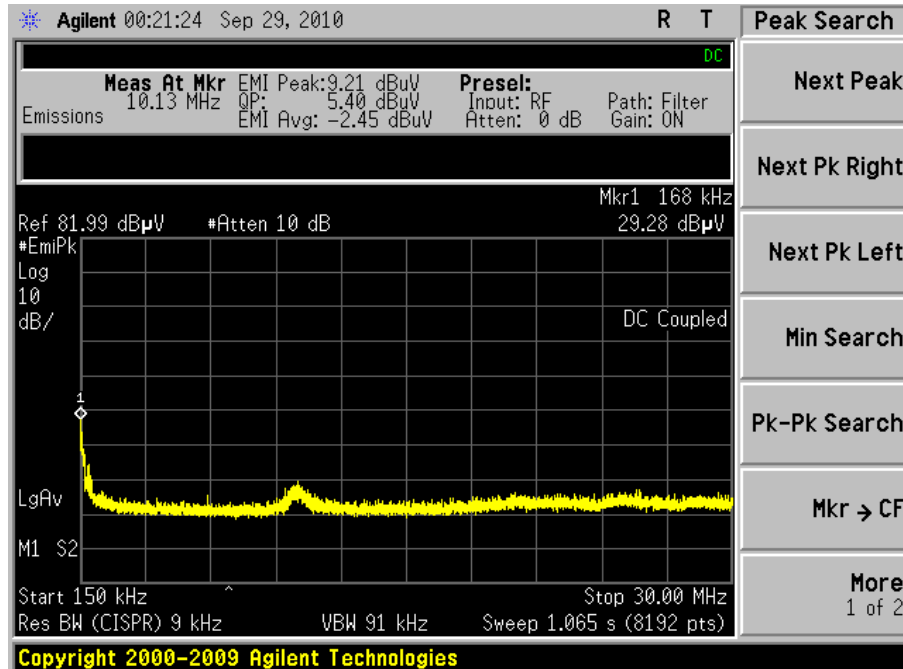

LINE 2

Prepared For: LS Research	Name: TiWi-BLECA
Report: TR 313249 B FCCICTX (FHSS)	Model: TiWi-BLECA
LSR: C-1808	Serial: Eng. Sample

Appendix C - Uncertainty Summary

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level, using a coverage factor of $k=2$.

Table of Expanded Uncertainty Values, (K=2) for Specified Measurements

Measurement Type	Particular Configuration	Uncertainty Values
Radiated Emissions	3 – Meter chamber, Biconical Antenna	4.82 dB
Radiated Emissions	3-Meter Chamber, Log Periodic Antenna	4.88 dB
Radiated Emissions	3-Meter Chamber, Horn Antenna	4.85 dB
Radiated Emissions	10-Meter OATS, Biconical Antenna	4.32 dB
Radiated Emissions	10-Meter OATS, Log Periodic Antenna	3.63 dB
Absolute Conducted Emissions	Agilent PSA/ESA Series	1.38 dB
AC Line Conducted Emissions	Shielded Room/EMCO LISN	3.20 dB
Radiated Immunity	3 Volts/Meter in 3-Meter Chamber	2.05 Volts/Meter
Conducted Immunity	3 Volts level	2.33 V
EFT Burst, Surge, VDI	230 VAC	54.4 V
ESD Immunity	Discharge at 15kV	3200 V
Temperature/Humidity	Thermo-hygrometer	0.64°/ 2.88 %RH

Appendix D - References

Publication	Year	Title
FCC CFR Parts 0-15	2013	Code of Federal Regulations – Telecommunications
ANSI C63.4	2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
RSS-210 Annex 8	2010	Low-power License-exempt Radio communication Devices (All Frequency Bands): Category I Equipment
RSS-GEN Issue 3	2010	General Requirements and Information for the Certification of Radio Apparatus
FCC Public Notice DA 00-705	2000	Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems

Prepared For: LS Research

Name: TiWi-BLECA

Report: TR 313249 B FCCICTX (FHSS)

Model: TiWi-BLECA

LSR: C-1808

Serial: Eng. Sample

Appendix E – MPE Calculations

Prediction of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = \frac{PG}{4\pi R^2}$$

where: S = power density

P = power input to the antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

Maximum peak output power at antenna input terminal:	19.42 (dBm)
Maximum peak output power at antenna input terminal:	87.498 (mW)
Antenna gain(typical):	1.3 (dBi)
Maximum antenna gain:	1.349 (numeric)
Prediction distance:	20 (cm)
Prediction frequency:	2437 (MHz)
MPE limit for uncontrolled exposure at prediction frequency:	1 (mW/cm ²)
Power density at prediction frequency:	0.023482 (mW/cm ²)
Maximum allowable antenna gain:	17.6 (dBi)
Margin of Compliance at 20 cm =	16.3 dB

Appendix F – Duty Cycle Measurements

Justifications of Average Duty Factor Calculations

BLUETOOTH RADIO


Average (Relaxation) Factor

Average Factor = $20 * \text{Log}_{10}$ (Worst Case EUT On-time over 100 ms time window)

The transmit packet occupies 0.98 ms of time, within any 100 ms window. Therefore, the relaxation factor allowance is calculated as:

$$\text{Average Factor} = 20 * \text{Log}_{10} (.98 / 100 \text{ ms}) = 40.18$$

A maximum relaxation factor of 20 dB would be allowable for this product.

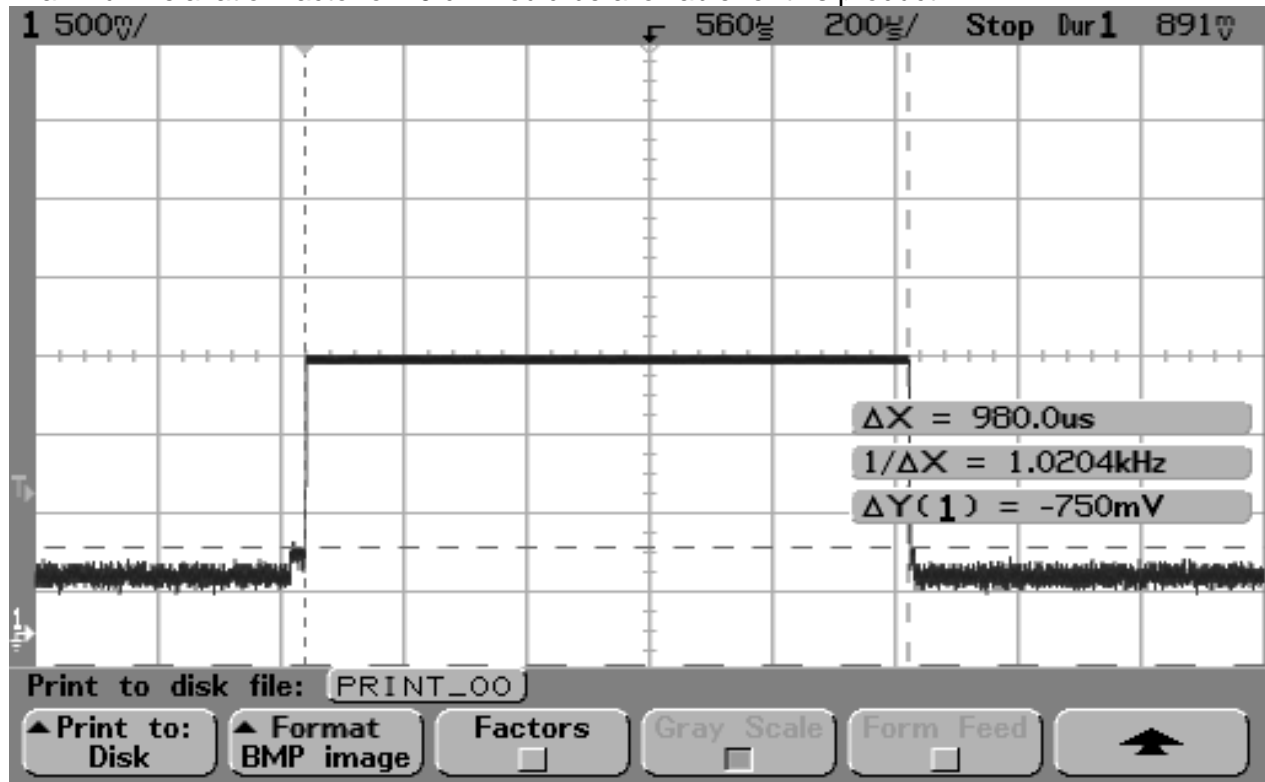

END OF REPORT

Date	Version	Comments	Person
9-19-13	V0	Draft release	Adam A

Prepared For: LS Research	Name: TiWi-BLECA
Report: TR 313249 B FCCICTX (FHSS)	Model: TiWi-BLECA
LSR: C-1808	Serial: Eng. Sample