

FCC 47 CFR PART 15 SUBPART C

Applicant : Uniform Industrial Corp.
Product Type : POS System
Trade Name : Uniform
Model Number : nPOS15
Test Specification : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013
Receive Date : Dec. 25, 2015
Test Period : Jan. 04 ~ Jan. 08, 2016
Issue Date : Jan. 12, 2016

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Note: This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.

Revision History

Rev.	Issue Date	Revisions	Revised By
00	Jan. 12, 2016	Initial Issue	

Verification of Compliance

Issued Date: 01/12/2016

Applicant : Uniform Industrial Corp.
Product Type : POS System
Trade Name : Uniform
Model Number : nPOS15
FCC ID : TFJ-NPOS15
EUT Rated Voltage : DC 12V, 5A
Test Voltage : 120 Vac / 60 Hz
Applicable Standard : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013

Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.

No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330
<http://www.atl-lab.com.tw/e-index.htm>

A Test Lab Techno Corp. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by A Test Lab Techno Corp. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By

: Fly Lu

(Manager)

(Fly Lu)

Reviewed By

: Eric Ou Yang

(Testing Engineer)

(Eric Ou Yang)

TABLE OF CONTENTS

1	General Information	6
2	EUT Description.....	7
3	Test Methodology.....	8
	3.1. Mode of Operation.....	8
	3.2. EUT Exercise Software	8
	3.3. Configuration of Test System Details.....	9
	3.4. Test Site Environment.....	10
4	Conducted Emission Measurement.....	11
	4.1. Limit.....	11
	4.2. Test Instruments	11
	4.3. Test Setup	11
	4.4. Test Procedure	12
	4.5. Test Result.....	13
5	Radiated Emission Measurement	15
	5.1. Limit.....	15
	5.2. Test Instruments	15
	5.3. Setup.....	16
	5.4. Test Procedure	18
	5.5. Test Result.....	20
6	Maximum Conducted Output Power Measurement.....	24
	6.1. Limit.....	24
	6.2. Test Setup	24
	6.3. Test Instruments	24
	6.4. Test Procedure	24
	6.5. Test Result.....	25
7	6dB RF Bandwidth Measurement.....	26
	7.1. Limit.....	26
	7.2. Test Setup	26
	7.3. Test Instruments	26
	7.4. Test Procedure	27
	7.5. Test Result.....	27
	7.6. Test Graphs	28

8	Maximum Power Density Measurement	29
8.1.	Limit.....	29
8.2.	Test Setup	29
8.3.	Test Instruments	29
8.4.	Test Procedure	29
8.5.	Test Result.....	30
8.6.	Test Graphs	31
9	Out of Band Conducted Emissions Measurement	32
9.1.	Limit.....	32
9.2.	Test Setup	32
9.3.	Test Instruments	32
9.4.	Test Procedure	32
9.5.	Test Graphs	33
10	Antenna Measurement	36
10.1.	Limit.....	36
10.2.	Antenna Connector Construction	36

1 General Information

1.1 Summary of Test Result

Standard		Item	Result	Remark
15.247	RSS-GEN			
15.207	8.8	AC Power Conducted Emission	PASS	-----
Standard		Item	Result	Remark
15.247	RSS-210			
15.247(d)	A8.5	Transmitter Radiated Emissions	PASS	-----
15.247(b)(3)	A8.4	Max. Output Power	PASS	-----
15.247(a)(2)	A8.2 (a)	6dB RF Bandwidth	PASS	-----
15.247(e)	A8.2 (b)	Power Spectral Density	PASS	-----
15.247(d)	A8.5	Out of Band Conducted Spurious Emission	PASS	-----
15.203	-	Antenna Requirement	PASS	-----

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

1.2 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Conducted Emission	9kHz ~ 150KHz	2.7
	150kHz ~ 30MHz	2.8
Radiated Emission	9kHz ~ 30MHz	1.457
	30MHz ~ 1000MHz	6.300
	1000MHz ~ 18000MHz	5.474
	18000MHz ~ 26500MHz	5.630
	26500MHz ~ 40000MHz	5.054

2 EUT Description

Applicant	Uniform Industrial Corp. 47341 Bayside Parkway, Fremont, California 94538, United States
Manufacturer	Uniform Industrial Corp. 47341 Bayside Parkway, Fremont, California 94538, United States
Product Type	POS System
Trade Name	Uniform
Model No.	nPOS15
FCC ID	TFJ-NPOS15
Frequency Range	Bluetooth LE: 2402 ~ 2480 MHz
Modulation Type	GFSK
Antenna Type	PIFA Antenna
Antenna Gain	3.5 dBi
RF Output Power	0.00324 W / 5.10 dBm

3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Normal Operation Mode
Mode 2: Bluetooth LE Link Mode

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.


3.2. EUT Exercise Software

1	Setup the EUT shown on 3.3.
2	Turn on the power of all equipment.
3	Turn Bluetooth function link to CBT.
4	EUT run test program.


Measurement Software	
1	EZ-EMC Ver. ATL-03A1-1
2	EZ-EMC Ver ATL-ITC-3A1-1

3.3. Configuration of Test System Details

AC Power Conducted Emission

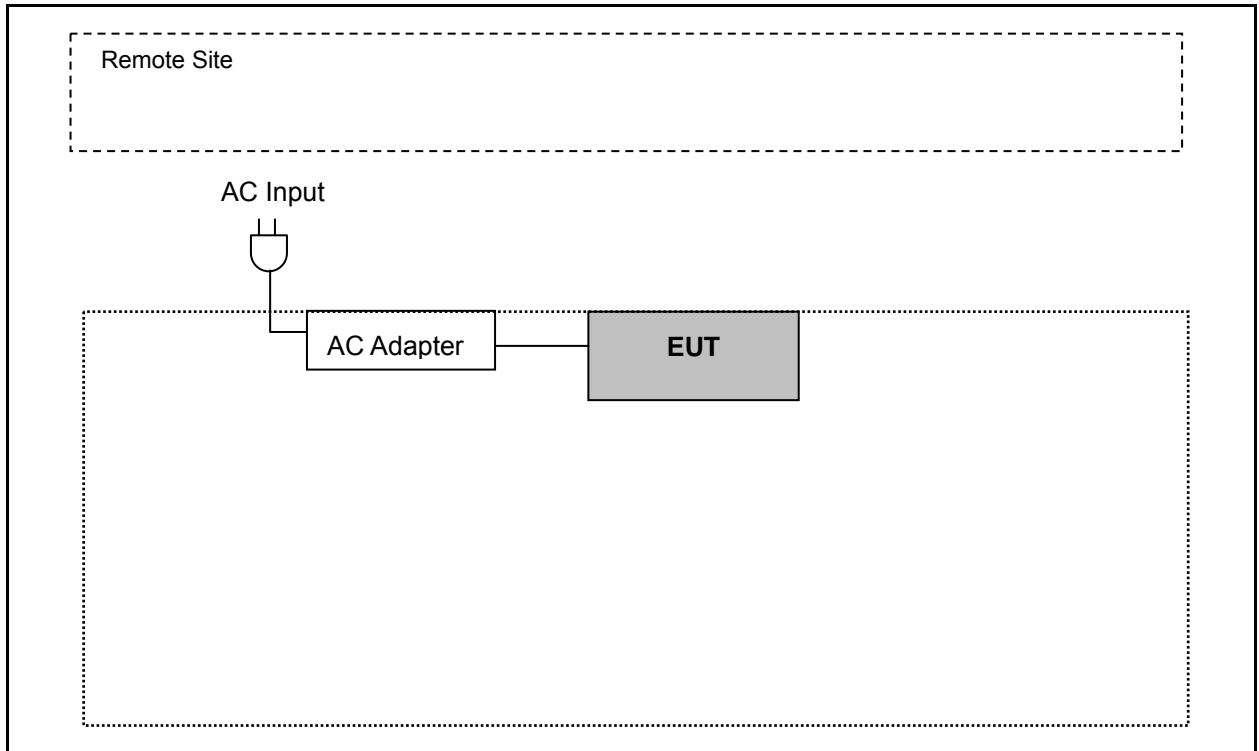

Radiated Emissions

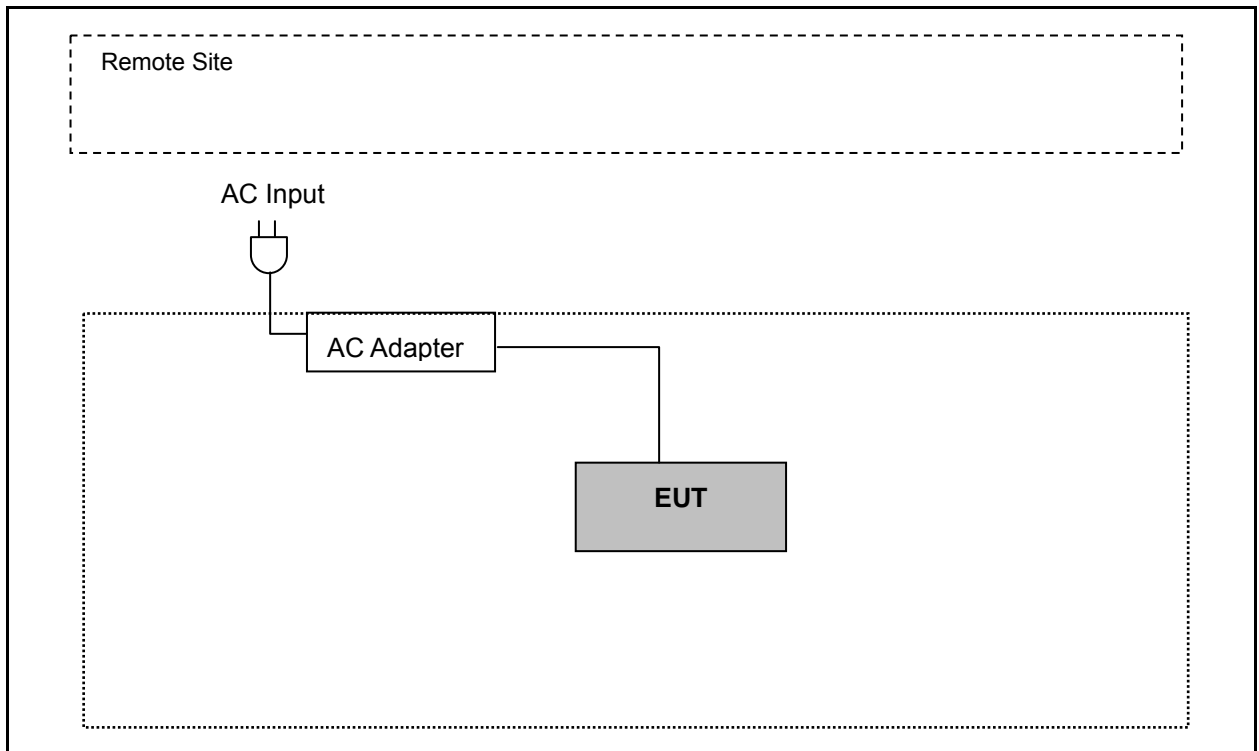

3.4. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950

4 Conducted Emission Measurement

4.1. Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50


4.2. Test Instruments

Describe	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Test Receiver	R&S	ESCI	100367	06/25/2015	(1)
LISN	R&S	ENV216	101040	03/10/2015	(1)
LISN	R&S	ENV216	101041	03/06/2015	(1)
RF Cable	Woken	00100D1380194M	TE-02-02	06/26/2015	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

4.3. Test Setup

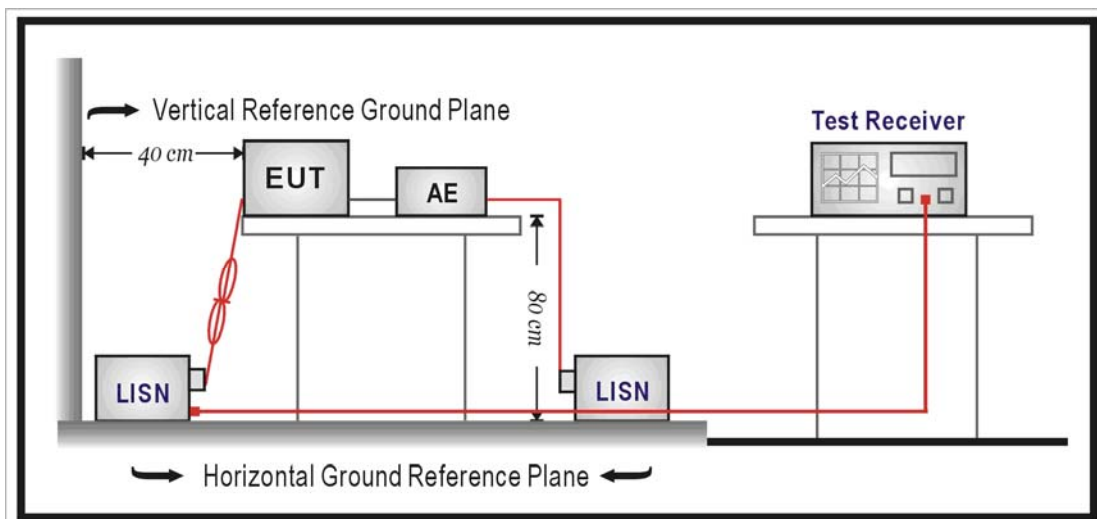

4.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination.


For A.C. mains conducted interference, measured both sides of A.C. lines and carried out using quasi-peak and average detector receivers of maximum conducted interference.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a receiver bandwidth of 9 kHz. The equipment under test (EUT) shall meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. The voltage limits shall be met. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored.

4.5. Test Result

Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	nPOS15	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	1	Date:	01/04/2016
		Test By:	Eric Ou Yang
Description:			

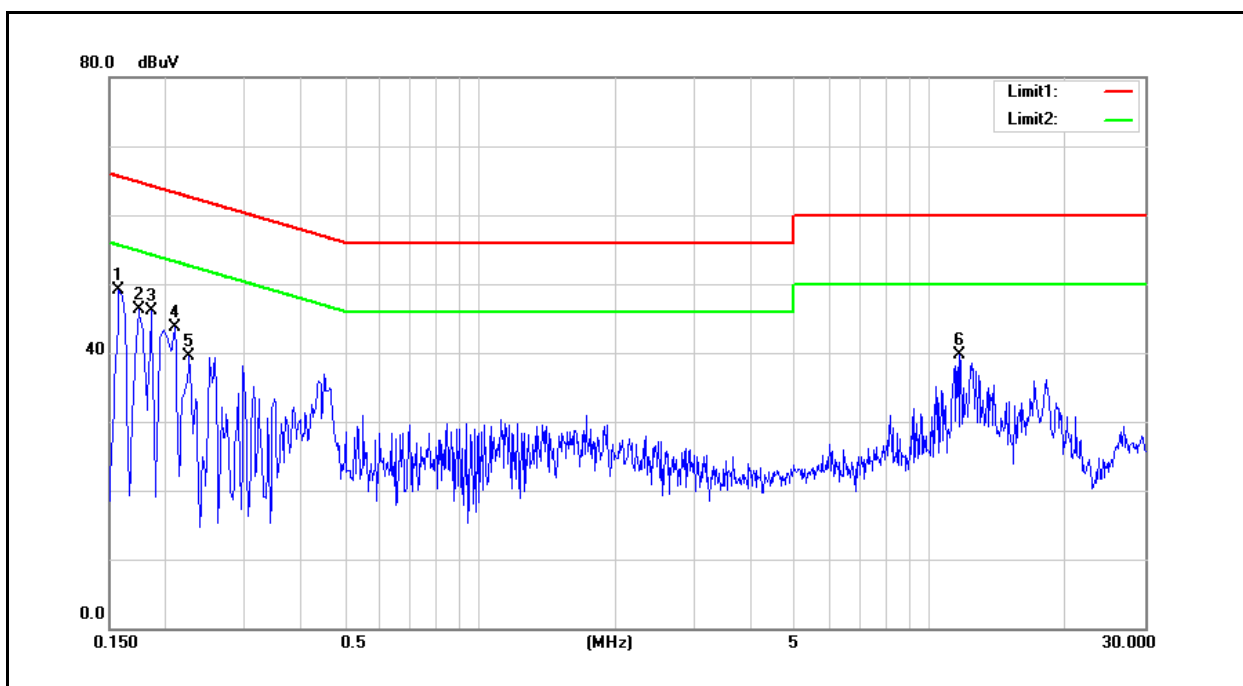


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1580	34.38	14.33	9.69	44.07	24.02	65.57	55.57	-21.50	-31.55	Pass
2	0.1740	34.68	15.97	9.69	44.37	25.66	64.77	54.77	-20.40	-29.11	Pass
3	0.1860	32.07	12.59	9.68	41.75	22.27	64.21	54.21	-22.46	-31.94	Pass
4	0.2100	28.53	10.79	9.68	38.21	20.47	63.21	53.21	-25.00	-32.74	Pass
5	0.2260	26.71	10.29	9.68	36.39	19.97	62.60	52.60	-26.21	-32.63	Pass
6	11.6420	28.65	27.66	9.99	38.64	37.65	60.00	50.00	-21.36	-12.35	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15C	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	nPOS15	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	1	Date:	01/04/2016
		Test By:	Eric Ou Yang

Description:

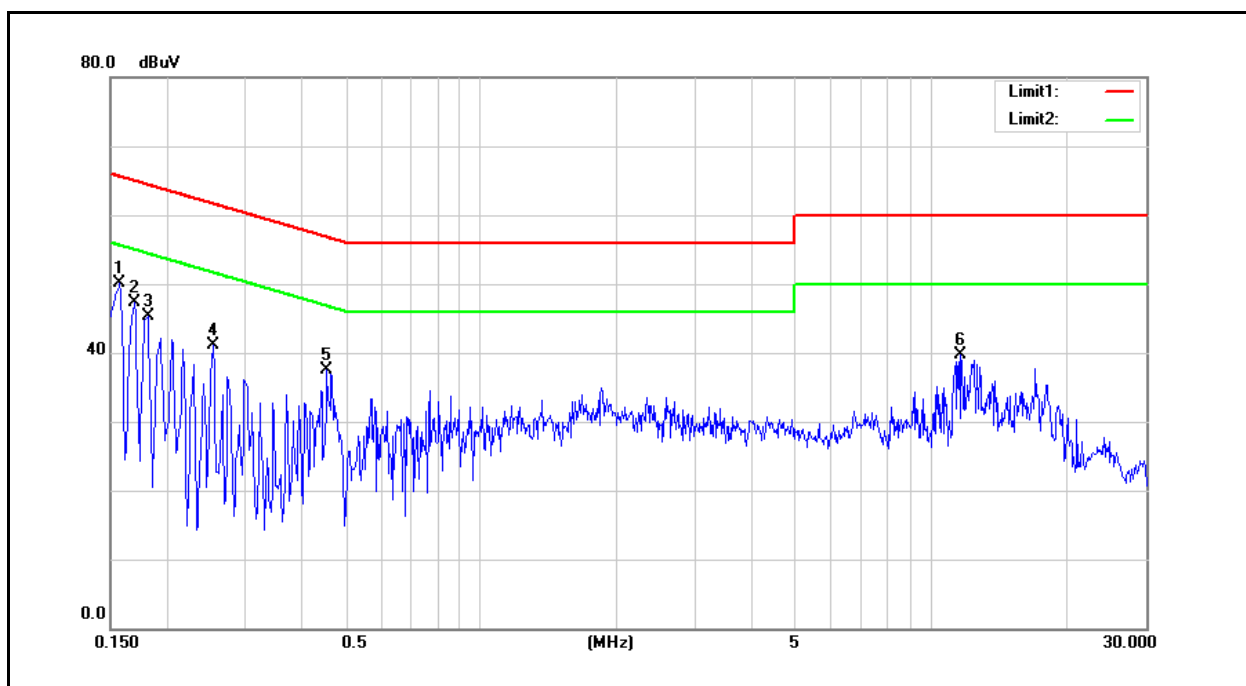

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1580	34.29	14.96	9.66	43.95	24.62	65.57	55.57	-21.62	-30.95	Pass
2	0.1700	35.09	17.79	9.66	44.75	27.45	64.96	54.96	-20.21	-27.51	Pass
3	0.1820	32.49	15.03	9.65	42.14	24.68	64.39	54.39	-22.25	-29.71	Pass
4	0.2540	24.17	10.48	9.66	33.83	20.14	61.63	51.63	-27.80	-31.49	Pass
5	0.4540	26.79	18.91	9.67	36.46	28.58	56.80	46.80	-20.34	-18.22	Pass
6	11.6420	28.92	27.98	10.01	38.93	37.99	60.00	50.00	-21.07	-12.01	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

5 Radiated Emission Measurement

5.1. Limit

According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at meter)	Measurement Distance (meters)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

5.2. Test Instruments


3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
RF Pre-selector	Agilent	N9039A	MY46520256	01/08/2016	(1)
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/08/2016	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/24/2015	(1)
Pre Amplifier	Agilent	8447D	2944A10961	02/24/2015	(1)
Broadband Antenna (30MHz~1GHz)	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	9163-270	08/11/2015	(1)
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/12/2015	(1)
Horn Antenna (18~40GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	07/06/2015	(1)
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	02/02/2015	(1)
Microwave Cable	EMCI	EMC-104-SM-S M-14000	140202	02/24/2015	(1)
Microwave Cable	EMCI	EMC104-SM-S M-600	140301	02/24/2015	(1)
Test Site	ATL	TE01	888001	08/27/2015	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.


Note: N.C.R. = No Calibration Request.

5.3. Setup


9kHz ~ 30MHz

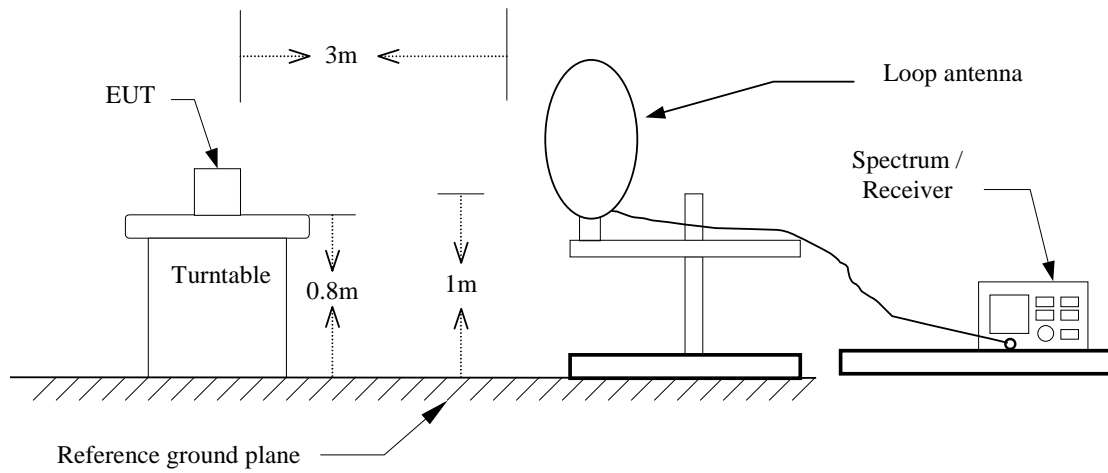

Below 1GHz

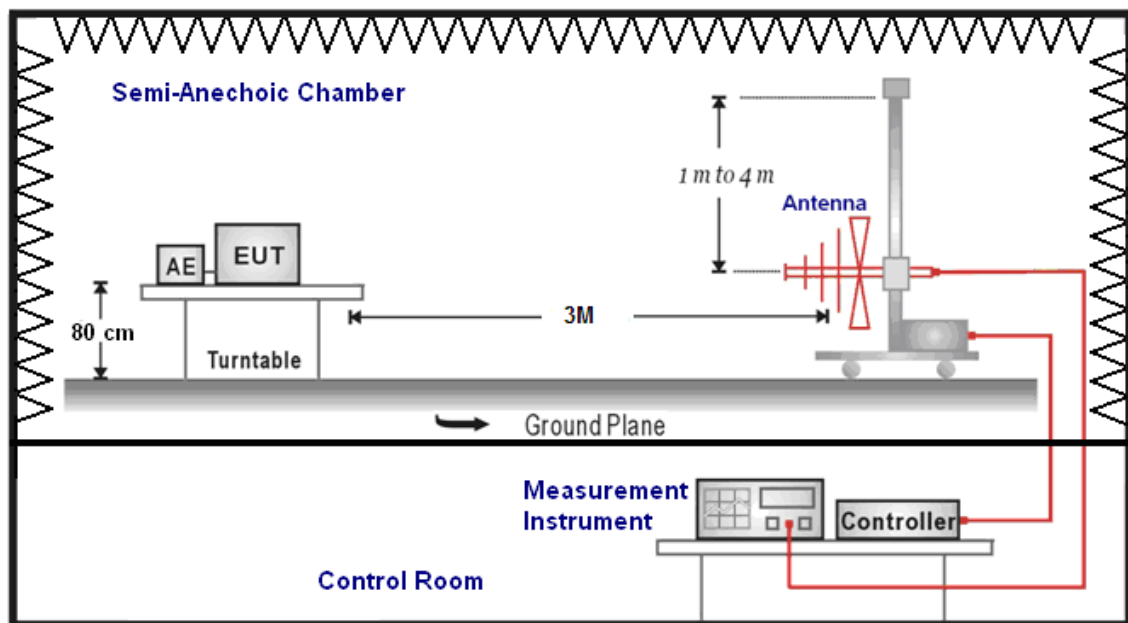

Above 1GHz

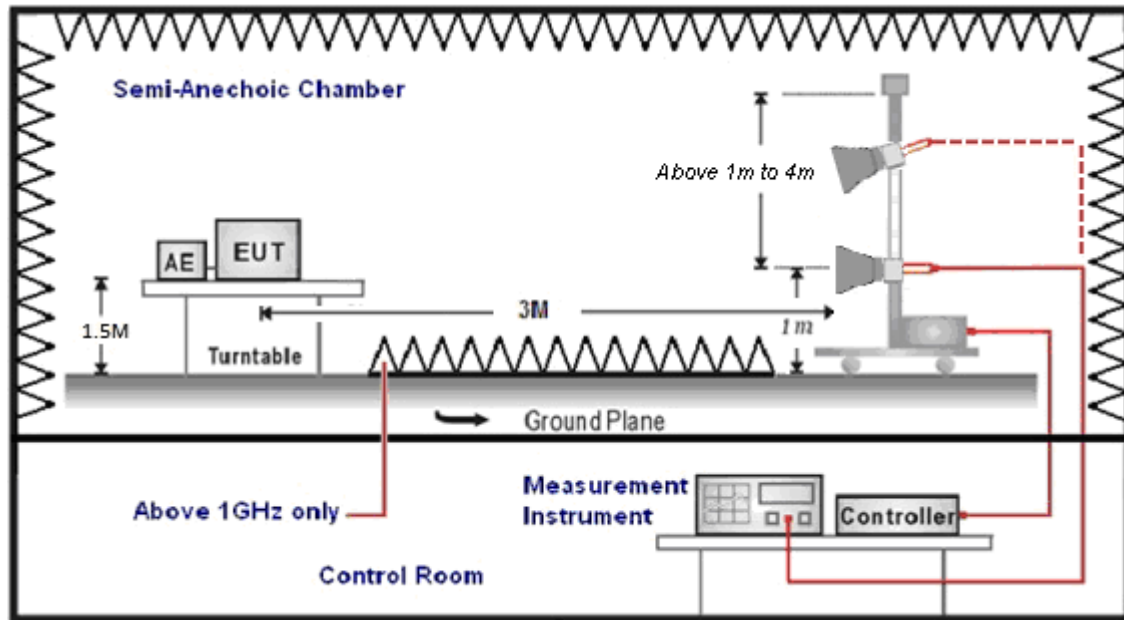

5.4. Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height (below 1GHz use 0.8m turntable / above 1GHz use 1.5m turntable), top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements when Duty cycle >98% / 1/T for average measurements when Duty cycle <98%. A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna (model VULB9163) at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna (model BBHA9120D&9170) was used in frequencies 1 – 26.5 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts per meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

(1) $\text{Amplitude (dBuV/m)} = \text{FI (dBuV)} + \text{AF (dBuV)} + \text{CL (dBuV)} - \text{Gain (dB)}$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

(2) $\text{Actual Amplitude (dBuV/m)} = \text{Amplitude (dBuV)} - \text{Dis(dB)}$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

5.5. Test Result

Below 1GHz

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		nPOS15		Temp.(℃)/Hum.(%RH):		26(℃)/60%RH	
Mode:		1		Date:		01/08/2016	
				Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
215.2700	44.93	-12.86	32.07	43.50	-11.43	QP	H
385.9900	42.34	-7.54	34.80	46.00	-11.20	QP	H
581.9300	33.96	-3.53	30.43	46.00	-15.57	QP	H
649.8300	40.56	-2.34	38.22	46.00	-7.78	QP	H
710.9400	37.48	-1.01	36.47	46.00	-9.53	QP	H
849.6500	35.10	1.60	36.70	46.00	-9.30	QP	H
203.6300	48.49	-13.58	34.91	43.50	-8.59	QP	V
549.9200	39.81	-4.19	35.62	46.00	-10.38	QP	V
649.8300	39.32	-2.34	36.98	46.00	-9.02	QP	V
775.9300	35.95	0.20	36.15	46.00	-9.85	QP	V
840.9200	33.90	1.41	35.31	46.00	-10.69	QP	V
950.5300	32.40	3.40	35.80	46.00	-10.20	QP	V

Note: No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).

Above 1GHz

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	nPOS15			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	2			Date:	01/08/2016		
Frequency:	2402MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2974.000	34.25	1.25	35.50	74.00	-38.50	peak	H
4577.000	32.43	6.59	39.02	74.00	-34.98	peak	H
6397.000	31.55	11.20	42.75	74.00	-31.25	peak	H
3009.000	33.60	1.35	34.95	74.00	-39.05	peak	V
4626.000	32.00	6.77	38.77	74.00	-35.23	peak	V
6663.000	30.50	11.93	42.43	74.00	-31.57	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	nPOS15			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	2			Date:	01/08/2016		
Frequency:	2440MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3037.000	34.57	1.48	36.05	74.00	-37.95	peak	H
4675.000	32.54	6.93	39.47	74.00	-34.53	peak	H
6453.000	30.03	11.39	41.42	74.00	-32.58	peak	H
2967.000	34.08	1.23	35.31	74.00	-38.69	peak	V
4675.000	34.45	6.93	41.38	74.00	-32.62	peak	V
6691.000	30.27	12.00	42.27	74.00	-31.73	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	nPOS15			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	2			Date:	01/08/2016		
Frequency:	2480MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3058.000	33.68	1.58	35.26	74.00	-38.74	peak	H
4577.000	32.46	6.59	39.05	74.00	-34.95	peak	H
6782.000	29.99	12.22	42.21	74.00	-31.79	peak	H
2939.000	36.33	1.16	37.49	74.00	-36.51	peak	V
4619.000	31.44	6.74	38.18	74.00	-35.82	peak	V
6579.000	30.91	11.74	42.65	74.00	-31.35	peak	V

Band Edge

Standard:	FCC Part 15C	Test Distance:	3m				
Test item:	Radiated Emission	Power:	AC 120V/60Hz				
Model Number:	nPOS15	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH				
Mode:	2	Date:	01/08/2016				
Frequency:	2402 MHz	Test By:	Eric Ou Yang				
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2373.250	41.98	-0.39	41.59	74.00	-32.41	peak	H
2390.000	41.09	-0.33	40.76	74.00	-33.24	peak	H
2373.250	45.23	-0.39	44.84	74.00	-29.16	peak	V
2390.000	43.20	-0.33	42.87	74.00	-31.13	peak	V


Standard:	FCC Part 15C	Test Distance:	3m				
Test item:	Radiated Emission	Power:	AC 120V/60Hz				
Model Number:	nPOS15	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH				
Mode:	2	Date:	01/08/2016				
Frequency:	2480 MHz	Test By:	Eric Ou Yang				
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	43.20	0.03	43.23	74.00	-30.77	peak	H
2483.620	44.90	0.03	44.93	74.00	-29.07	peak	H
2483.500	44.64	0.03	44.67	74.00	-29.33	peak	V
2483.700	45.42	0.03	45.45	74.00	-28.55	peak	V

6 Maximum Conducted Output Power Measurement

6.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm.

6.2. Test Setup

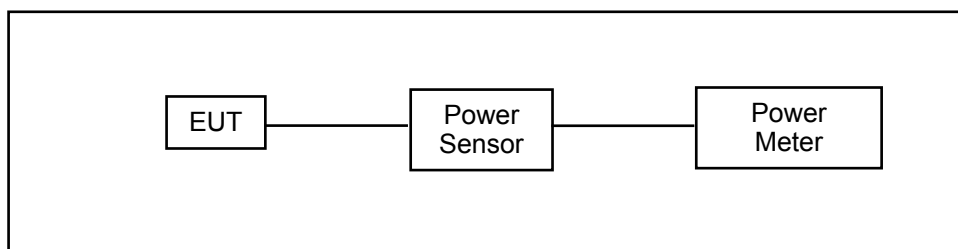

6.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Single Channel PK Power Sensor	Agilent	N1911A	MY45101619	12/11/2015	(1)
Wideband Power Meter	Agilent	N1921A	MY45241957	12/11/2015	(1)
Microwave Cable	EMCI	EMC104-SM-S M-1500	140303	02/24/2015	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

6.4. Test Procedure

The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor. The maximum peak output power shall not exceed 1 watt.

Use a direct connection between the antenna port of transmitter and the power sensor, for prevent the power sensor input attenuation 40-50 dB. Set the RBW Bandwidth of the emission or use a channel power meter mode.

For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt (+30 dBm). For antennas with gains greater than 6 dBi, transmitter output level must be decreased by an amount equal to (GAIN - 6)/3 dBm.

The antenna port of the EUT was connected to the input of a power sensor. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.

6.5. Test Result

Model Number	nPOS15					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 2: Bluetooth LE Link Mode					
Date of Test	01/04/2016			Test Site	TE05	
Frequency (MHz)	Data Rate	Average Power		Peak Power		Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	
2402	---	4.49	0.00281	5.10	0.00324	< 30
2440	---	4.43	0.00277	5.01	0.00317	< 30
2480	---	4.05	0.00254	4.68	0.00294	< 30


Note: The relevant measured result has the offset with cable loss already.

7 6dB RF Bandwidth Measurement

7.1. Limit

6dB RF Bandwidth: Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

7.2. Test Setup

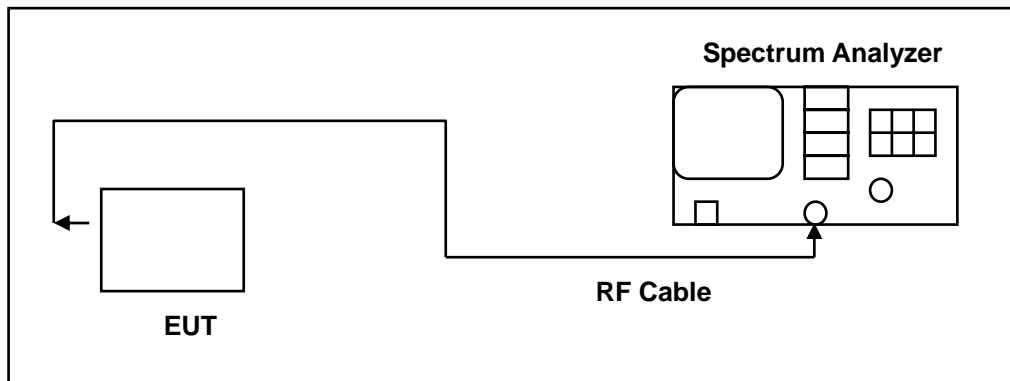

7.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/15/2015	(1)
Microwave Cable	EMCI	EMC104-SM-S M-1500	140303	02/24/2015	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

dRemark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

7.4. Test Procedure

The EUT tested to DTS test procedure of KDB558074D01 for compliance to FCC 47CFR 15.247 requirements.

6dB RF Bandwidth: The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.




The test was performed at 3 channels (Channel low, middle, high)

7.5. Test Result

Model Number	nPOS15		
Test Item	6dB RF Bandwidth & 99 % Occupied Bandwidth		
Test Mode	Mode 2: Bluetooth LE Link Mode		
Date of Test	01/04/2016	Test Site	TE05
Frequency (MHz)	6dB Bandwidth (kHz)	6dB RF Bandwidth Limit (kHz)	
2402	763.146	> 500	
2440	562.010	> 500	
2480	785.535	> 500	

7.6. Test Graphs

6dB RF Bandwidth

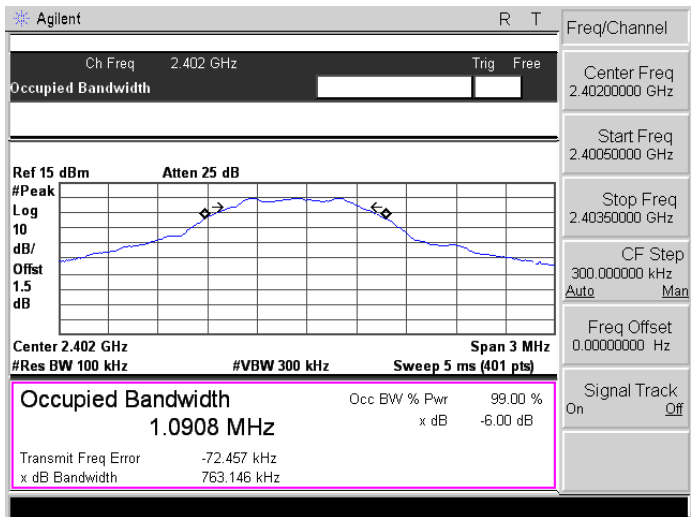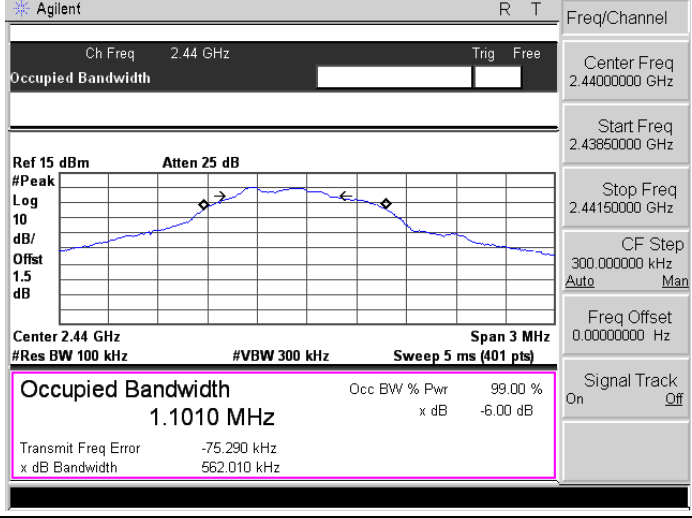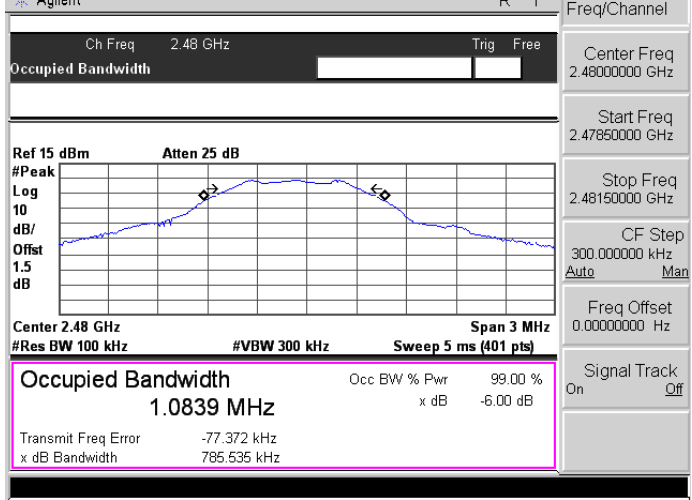
Mode 2: Bluetooth LE Link Mode	
2402	 <p>Agilent R T</p> <p>Ch Freq 2.402 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 15 dBm Atten 25 dB</p> <p>#Peak Log 10 dB/Offset 1.5 dB</p> <p>Center 2.402 GHz Span 3 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 5 ms (401 pts)</p> <p>Occupied Bandwidth 1.0908 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -72.457 kHz</p> <p>x dB Bandwidth 763.146 kHz</p> <p>Freq/Channel</p> <p>Center Freq 2.4020000 GHz</p> <p>Start Freq 2.4005000 GHz</p> <p>Stop Freq 2.4035000 GHz</p> <p>CF Step 300.000000 kHz Auto Man</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p>
2440	 <p>Agilent R T</p> <p>Ch Freq 2.44 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 15 dBm Atten 25 dB</p> <p>#Peak Log 10 dB/Offset 1.5 dB</p> <p>Center 2.44 GHz Span 3 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 5 ms (401 pts)</p> <p>Occupied Bandwidth 1.1010 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -75.290 kHz</p> <p>x dB Bandwidth 562.010 kHz</p> <p>Freq/Channel</p> <p>Center Freq 2.4400000 GHz</p> <p>Start Freq 2.4385000 GHz</p> <p>Stop Freq 2.4415000 GHz</p> <p>CF Step 300.000000 kHz Auto Man</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p>
2480	 <p>Agilent R T</p> <p>Ch Freq 2.48 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 15 dBm Atten 25 dB</p> <p>#Peak Log 10 dB/Offset 1.5 dB</p> <p>Center 2.48 GHz Span 3 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 5 ms (401 pts)</p> <p>Occupied Bandwidth 1.0839 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -77.372 kHz</p> <p>x dB Bandwidth 785.535 kHz</p> <p>Freq/Channel</p> <p>Center Freq 2.4800000 GHz</p> <p>Start Freq 2.4785000 GHz</p> <p>Stop Freq 2.4815000 GHz</p> <p>CF Step 300.000000 kHz Auto Man</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p>

8 Maximum Power Density Measurement

8.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.2. Test Setup

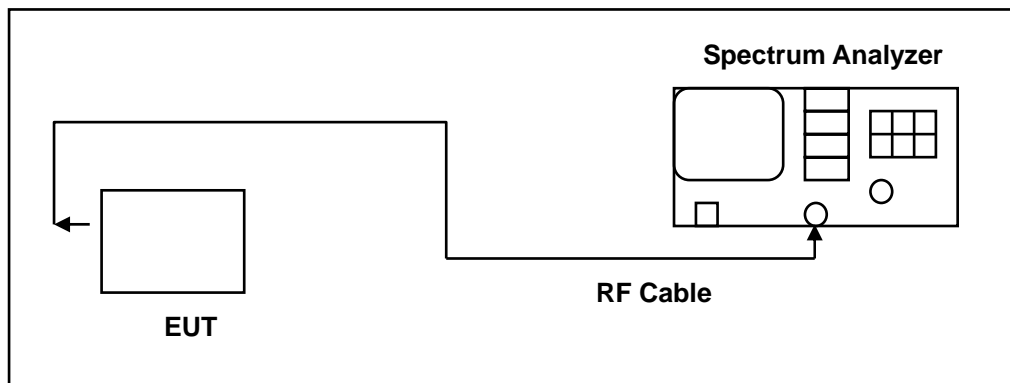

8.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/15/2015	(1)
Microwave Cable	EMCI	EMC104-SM-S M-1500	140303	02/24/2015	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

8.4. Test Procedure




The EUT tested to DTS test procedure of KDB558074D01 for compliance to FCC 47CFR 15.247 requirements.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

8.5. Test Result

Model Number	nPOS15		
Test Item	Maximum Power Density		
Test Mode	Mode 2: Bluetooth LE Link Mode		
Date of Test	01/04/2016	Test Site	TE05
Frequency (MHz)	Reading (dBm/3KHz)		Limit (dBm)
2402	-10.240		< 8
2440	-10.230		< 8
2480	-9.053		< 8

8.6. Test Graphs

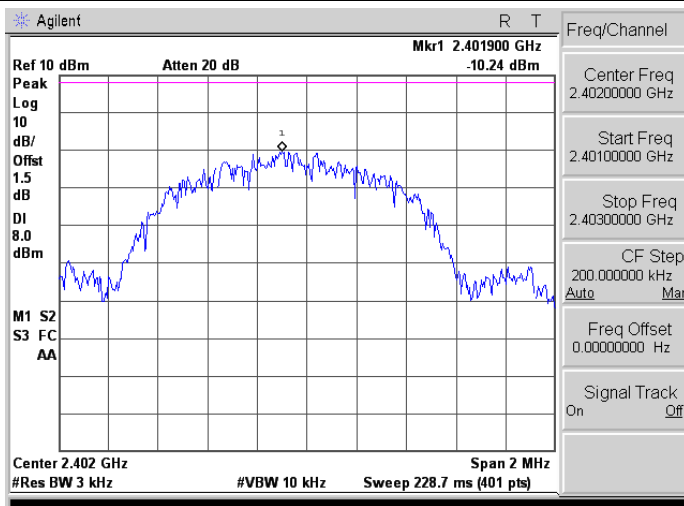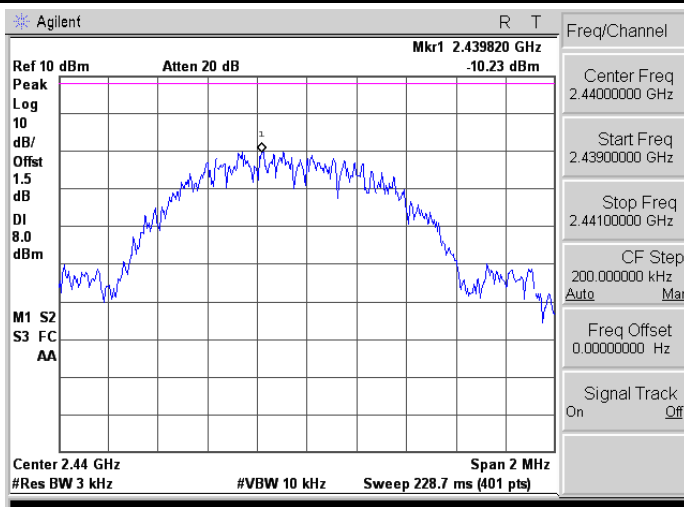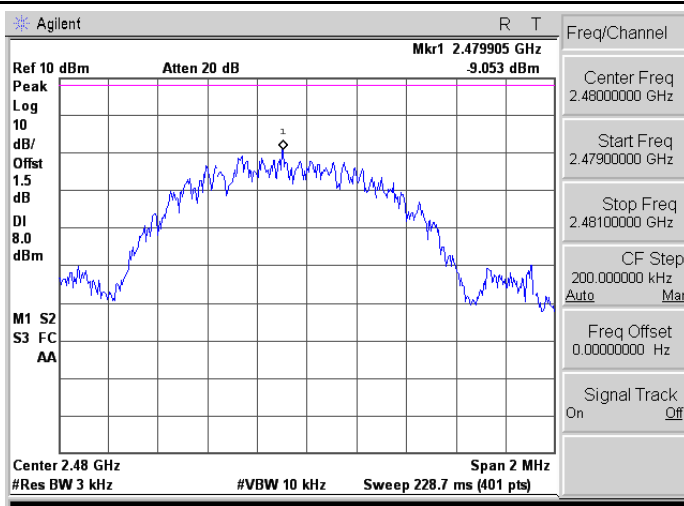
Mode 2: Bluetooth LE Link Mode	
2402	 <p>Agilent R T</p> <p>Ref 10 dBm Atten 20 dB Mkr1 2.401900 GHz -10.24 dBm</p> <p>Peak Log 10 dB/Offst 1.5 dB DI 8.0 dBm</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.402 GHz Span 2 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 228.7 ms (401 pts)</p> <p>Freq/Channel</p> <p>Center Freq 2.40200000 GHz</p> <p>Start Freq 2.40100000 GHz</p> <p>Stop Freq 2.40300000 GHz</p> <p>CF Step 200.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
2440	 <p>Agilent R T</p> <p>Ref 10 dBm Atten 20 dB Mkr1 2.439820 GHz -10.23 dBm</p> <p>Peak Log 10 dB/Offst 1.5 dB DI 8.0 dBm</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.44 GHz Span 2 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 228.7 ms (401 pts)</p> <p>Freq/Channel</p> <p>Center Freq 2.44000000 GHz</p> <p>Start Freq 2.43900000 GHz</p> <p>Stop Freq 2.44100000 GHz</p> <p>CF Step 200.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
2480	 <p>Agilent R T</p> <p>Ref 10 dBm Atten 20 dB Mkr1 2.479905 GHz -9.053 dBm</p> <p>Peak Log 10 dB/Offst 1.5 dB DI 8.0 dBm</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.48 GHz Span 2 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 228.7 ms (401 pts)</p> <p>Freq/Channel</p> <p>Center Freq 2.48000000 GHz</p> <p>Start Freq 2.47900000 GHz</p> <p>Stop Freq 2.48100000 GHz</p> <p>CF Step 200.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>

9 Out of Band Conducted Emissions Measurement

9.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

9.2. Test Setup

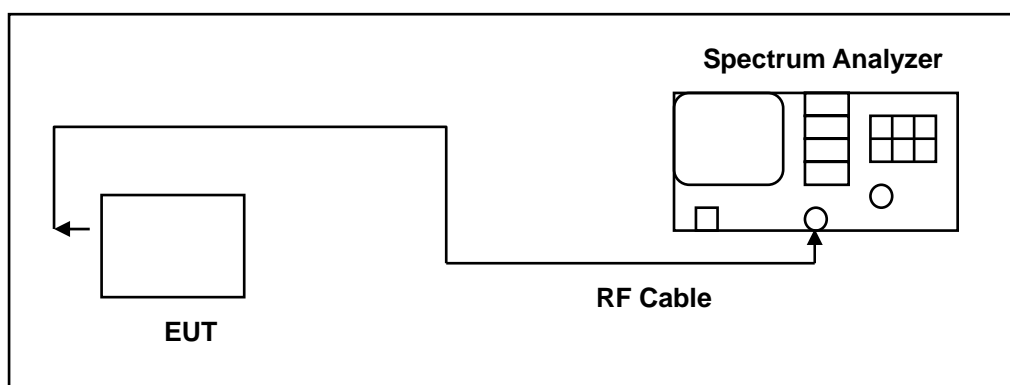

9.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/15/2015	(1)
Spectrum Analyzer	Agilent	E4408B	MY45107753	07/27/2015	(1)
Microwave Cable	EMCI	EMC104-SM-S M-1500	140303	02/24/2015	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year.

Note: N.C.R. = No Calibration Request.

9.4. Test Procedure




In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band.

The test was performed at 3 channels.




9.5. Test Graphs

Reference level

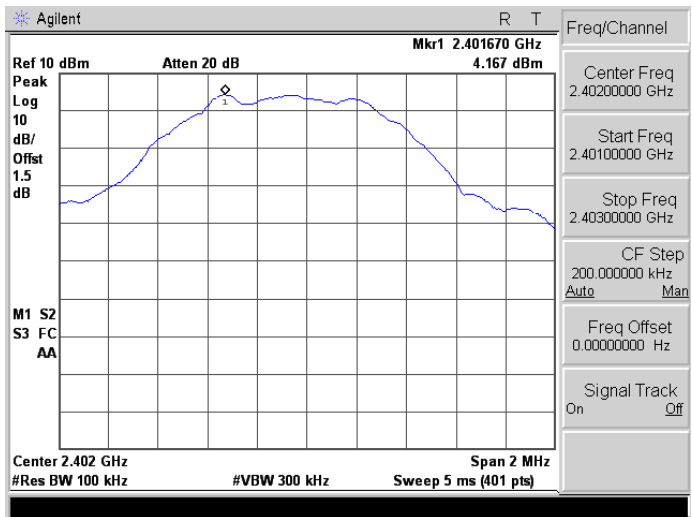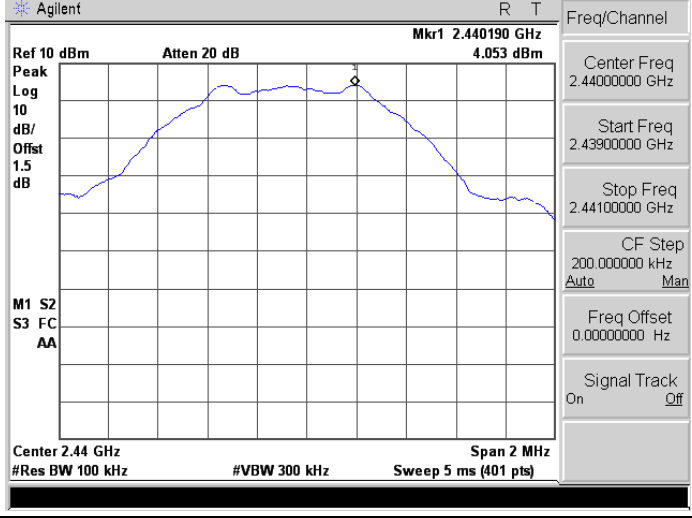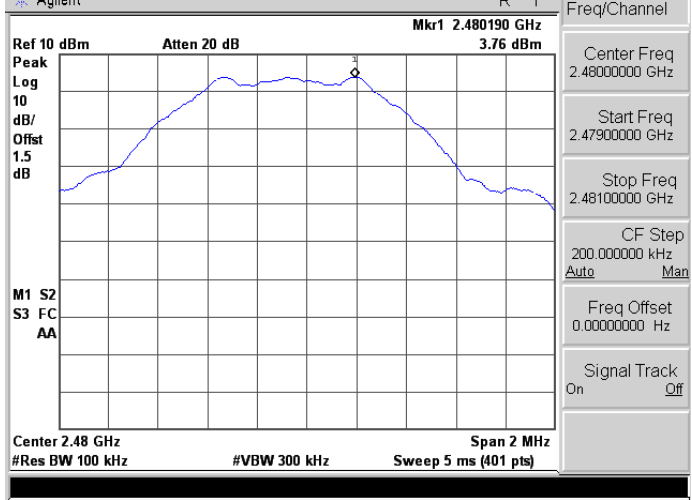Mode 2: Bluetooth LE Link Mode	
2402	 <p>Agilent R T</p> <p>Ref 10 dBm Atten 20 dB Mkr1 2.401670 GHz 4.167 dBm</p> <p>Peak Log 10 dB/Offset 1.5 dB</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.402 GHz Span 2 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 5 ms (401 pts)</p> <p>Freq/Channel</p> <p>Center Freq 2.40200000 GHz</p> <p>Start Freq 2.40100000 GHz</p> <p>Stop Freq 2.40300000 GHz</p> <p>CF Step 200.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
2440	 <p>Agilent R T</p> <p>Ref 10 dBm Atten 20 dB Mkr1 2.440190 GHz 4.053 dBm</p> <p>Peak Log 10 dB/Offset 1.5 dB</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.44 GHz Span 2 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 5 ms (401 pts)</p> <p>Freq/Channel</p> <p>Center Freq 2.44000000 GHz</p> <p>Start Freq 2.43900000 GHz</p> <p>Stop Freq 2.44100000 GHz</p> <p>CF Step 200.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
2480	 <p>Agilent R T</p> <p>Ref 10 dBm Atten 20 dB Mkr1 2.480190 GHz 3.76 dBm</p> <p>Peak Log 10 dB/Offset 1.5 dB</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.48 GHz Span 2 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 5 ms (401 pts)</p> <p>Freq/Channel</p> <p>Center Freq 2.48000000 GHz</p> <p>Start Freq 2.47900000 GHz</p> <p>Stop Freq 2.48100000 GHz</p> <p>CF Step 200.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>

Out of Band Conducted Emissions


Mode 2: Bluetooth LE Link Mode

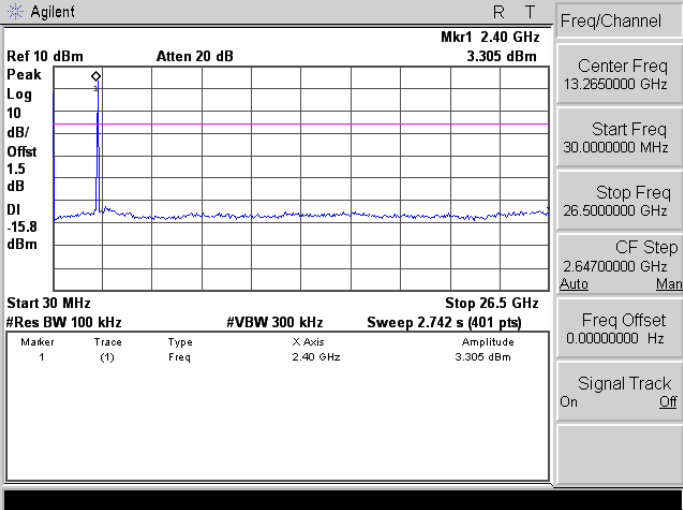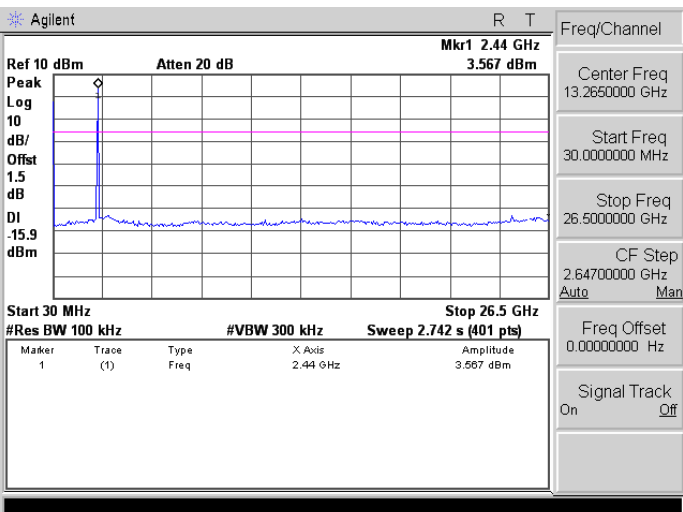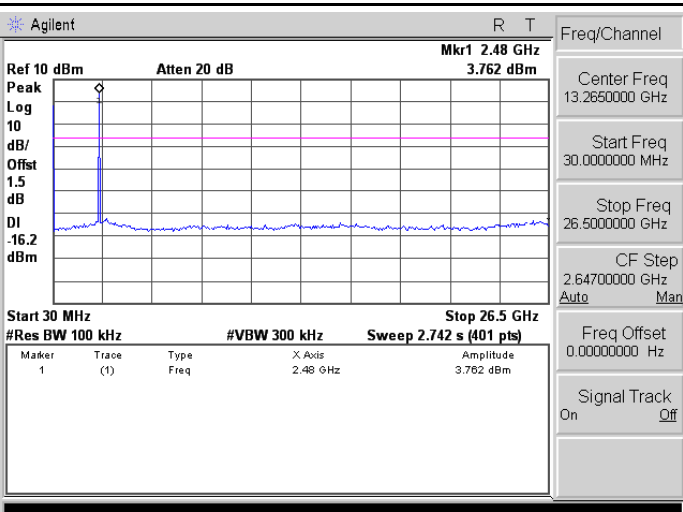2402	
2440	
2480	


Conducted Band Edge

Mode 2: Bluetooth LE Link Mode

2402

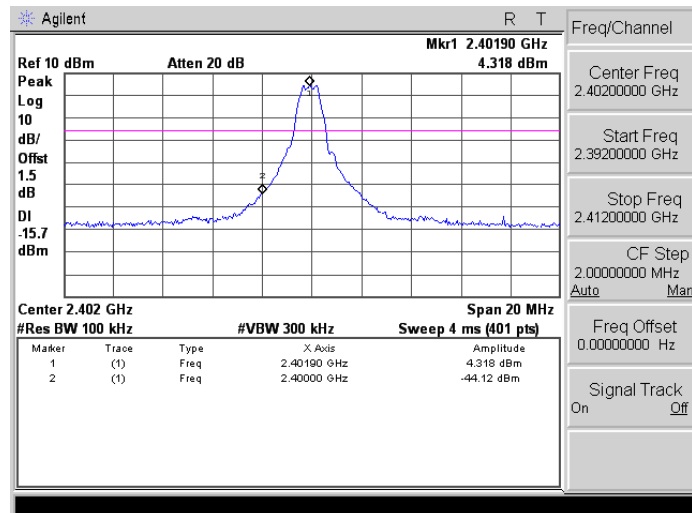

2480

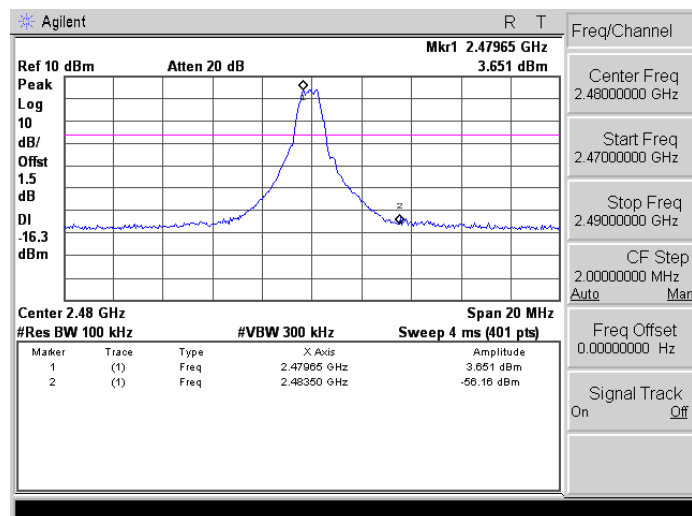

10 Antenna Measurement

10.1.Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

10.2.Antenna Connector Construction

The antenna used in this product is PIFA Antenna. And the maximum Gain of this antenna is 3.5 dBi.