



<b>Prüfbericht-Nr.:</b> <i>Test report no.:</i>	CN2310OU (P15C-BLE) 001	<b>Auftrags-Nr.:</b> <i>Order no.:</i>	48219427	Seite 1 von 24 Page 1 of 24
<b>Kunden-Referenz-Nr.:</b> <i>Client reference no.:</i>	N/A	<b>Auftragsdatum:</b> <i>Order date:</i>	2023-05-31	
<b>Auftraggeber:</b> <i>Client:</i>	Orange Electronic Co., Ltd 5F., No.29, Keya Rd., Daya Dist., Taichung City 428, Taiwan			
<b>Prüfgegenstand:</b> <i>Test item:</i>	TPMS Sensor			
<b>Bezeichnung / Typ-Nr.:</b> <i>Identification / Type no.:</i>	TS2547			
<b>Auftrags-Inhalt:</b> <i>Order content:</i>	FCC Part 15C Test report (BLE)			
<b>Prüfgrundlage:</b> <i>Test specification:</i>	FCC 47CFR Part 15: Subpart C Section 15.247			
<b>Wareneingangsdatum:</b> <i>Date of sample receipt:</i>	2023-06-13			
<b>Prüfmuster-Nr.:</b> <i>Test sample no.:</i>	A003494675-003 A003494675-001			
<b>Prüfzeitraum:</b> <i>Testing period:</i>	2023-07-03 - 2023-07-04			
<b>Ort der Prüfung:</b> <i>Place of testing:</i>	EMC/RF Taipei Testing Site			
<b>Prüflaboratorium:</b> <i>Testing laboratory:</i>	Taipei Testing Laboratories			
<b>Prüfergebnis*:</b> <i>Test result*:</i>	Pass			
<b>zusammengestellt von:</b> <i>compiled by:</i>	<b>genehmigt von:</b> <i>authorized by:</i>			
<b>Datum:</b> <i>Date:</i> 2023-07-17	 Ethan Shao		 Brenda Chen	
<b>Stellung / Position:</b>	Assistant Project Engineer		Senior Project Manager	
<b>Sonstiges / Other:</b>				
<b>Zustand des Prüfgegenstandes bei Anlieferung:</b> <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend N/A = nicht anwendbar	4 = ausreichend N/T = nicht getestet
* Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory N/A = not applicable	4 = sufficient N/T = not tested
<b>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</b> <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

## TEST SUMMARY

Report Section	FCC Clause	Test Item	Result
5.1.1	15.247(b) & 15.203	Antenna Requirement	Pass
5.1.2	15.247(b)(3)	Peak Output Power	Pass
5.1.3	15.247(a)(2)	6 dB Bandwidth	Pass
5.1.3	2.1049	99% Occupied Bandwidth	Pass
5.1.4	15.247(e)	Power Spectral Density	Pass
5.1.5	15.247(d)	Conducted Spurious Emissions and Band Edges	Pass
5.1.6	15.247(d) & 15.205 & 15.209	Radiated Spurious Emissions and Band Edges	Pass
-	15.207	Mains Conducted Emission	N/A

**Note:** Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

## Contents

<b>HISTORY OF THIS TEST REPORT .....</b>	<b>5</b>
<b>1. GENERAL REMARKS .....</b>	<b>6</b>
<b>1.1 COMPLEMENTARY MATERIALS.....</b>	<b>6</b>
<b>1.2 DECISION RULE OF CONFORMITY .....</b>	<b>6</b>
<b>2. TEST SITES .....</b>	<b>7</b>
<b>2.1 TEST LABORATORY .....</b>	<b>7</b>
<b>2.2 TEST FACILITY.....</b>	<b>7</b>
<b>2.3 TRACEABILITY .....</b>	<b>8</b>
<b>2.4 CALIBRATION .....</b>	<b>8</b>
<b>2.5 MEASUREMENT UNCERTAINTY .....</b>	<b>8</b>
<b>3. GENERAL PRODUCT INFORMATION.....</b>	<b>9</b>
<b>3.1 PRODUCT FUNCTION AND INTENDED USE .....</b>	<b>9</b>
<b>3.2 SYSTEM DETAILS AND RATINGS.....</b>	<b>9</b>
<b>3.3 NOISE GENERATING AND NOISE SUPPRESSING PARTS .....</b>	<b>10</b>
<b>3.4 SUBMITTED DOCUMENTS.....</b>	<b>10</b>
<b>4. TEST SET-UP AND OPERATION MODES.....</b>	<b>11</b>
<b>4.1 PRINCIPLE OF CONFIGURATION SELECTION .....</b>	<b>11</b>
<b>4.2 CARRIER FREQUENCY AND CHANNEL.....</b>	<b>11</b>
<b>4.3 TEST OPERATION AND TEST SOFTWARE.....</b>	<b>12</b>
<b>4.4 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT .....</b>	<b>13</b>
<b>4.5 TEST SETUP DIAGRAM .....</b>	<b>13</b>
<b>5. TEST RESULTS .....</b>	<b>14</b>
<b>5.1 TRANSMITTER REQUIREMENT &amp; TEST SUITES .....</b>	<b>14</b>
5.1.1 <i>Antenna Requirement .....</i>	<i>14</i>
5.1.2 <i>Peak Output Power .....</i>	<i>15</i>
5.1.3 <i>6 dB Bandwidth and 99% Occupied Bandwidth.....</i>	<i>17</i>
5.1.4 <i>Power Spectral Density.....</i>	<i>18</i>
5.1.5 <i>Conducted Spurious Emissions and Frequency Band Edges Measured in 100kHz Bandwidth .....</i>	<i>19</i>
5.1.6 <i>Radiated Spurious Emissions and Band Edges .....</i>	<i>20</i>

**Prüfbericht - Nr.: CN2310OU (P15C-BLE) 001**  
Test Report No.

Seite 4 von 24  
Page 4 of 24

**APPENDIX A - TEST RESULT OF CONDUCTED**

**APPENDIX B - TEST RESULT OF RADIATED EMISSIONS**

**APPENDIX SP - PHOTOGRAPHS OF TEST SETUP**

**APPENDIX EP - PHOTOGRAPHS OF EUT**

**Prüfbericht - Nr.:** CN2310OU (P15C-BLE) 001  
Test Report No.

Seite 5 von 24  
Page 5 of 24

### HISTORY OF THIS TEST REPORT

Report No.	Description	Date Issued
CN2310OU (P15C-BLE) 001	Original Release	2023-07-17

## 1. General Remarks

### 1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

**Appendix A - Test Result of Conducted**

**Appendix B - Test Result of Radiated Emissions**

**Appendix SP - Photographs of Test Setup**

**Appendix EP - Photographs of EUT**

### Applied Standard and Test Levels

Radio
FCC 47CFR Part 15: Subpart C Section 15.247
FCC 47CFR Part 2: Subpart J Section 2.1049
ANSI C63.10:2013
KDB 558074 D01 15.247 Meas Guidance v05r02

### 1.2 Decision Rule of Conformity

The decision rule of conformity of this test report is following the requirements of the requested standard in the quotation, and agreed among testing laboratory and manufacturer (applicant) to exclude the consideration of Measurement Uncertainty, unless it is required by the specific standard.

## 2. Test Sites

### 2.1 Test Laboratory

Taipei Testing Laboratories

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.  
Taipei City 105  
Taiwan (R.O.C.)

### 2.2 Test Facility

Taipei Testing Laboratories

No.458-18, Sec. 2, Fenliao Rd., Linkou Dist.,  
New Taipei City 244  
Taiwan (R.O.C.)  
FCC Registration No.: 180491  
ISED Registration No.: 25563

## 2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

## 2.4 Calibration

Equipment requiring calibration is calibrated periodically in a suitably accredited Calibration Lab. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

## 2.5 Measurement Uncertainty

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicate a 95% level of confidence.

### Emission Measurement Uncertainty

Parameter	Uncertainty
Radiated Emission (9 kHz ~ 30 MHz)	$\pm 1.15$ dB
Radiated Emission (30 MHz ~ 200 MHz)	$\pm 1.30$ dB
Radiated Emission (200 MHz ~ 1 GHz)	$\pm 1.30$ dB
Radiated Emission (1 GHz ~ 18 GHz)	$\pm 1.54$ dB
Radiated Emission (18 GHz ~ 40 GHz)	$\pm 2.52$ dB
Mains Conducted Emission	$\pm 1.65$ dB



### 3. General Product Information

#### 3.1 Product Function and Intended Use

The EUT is a TPMS Sensor. It contains a Bluetooth compatible module enabling the user to communicate data through a Wireless interface.

For details refer to the User Guide, Data Sheet and Circuit Diagram.

#### 3.2 System Details and Ratings

##### Basic Information of EUT

Item	EUT information
Kind of Equipment/Test Item	TPMS Sensor
Type Identification	TS2547
FCC ID	TH9TS2547

##### Technical Specification of EUT

Item	EUT information
Operating Frequency	2402 MHz ~ 2480 MHz
Channel Number	40
Data Rate	1Mbps
Operation Voltage	3.0 Vdc
Modulation	GFSK
Maximum Output Power (mW)	1.08
Antenna Information	Refer to 5.1.1
Accessory Device	Refer to 4.4

### **3.3 Noise Generating and Noise Suppressing Parts**

Refer to the Circuit Diagram.

### **3.4 Submitted Documents**

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

## 4. Test Set-up and Operation Modes

### 4.1 Principle of Configuration Selection

The test modes were adapted accordingly in reference to the instructions for use.

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output expected by the customer and is going to be fixed on the firmware of the final end product.

#### Table for Parameters of Test Software Setting

Frequency (MHz)	Power Setting
2402	Default
2440	Default
2480	Default

### 4.2 Carrier Frequency and Channel

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

### 4.3 Test Operation and Test Software

Setup for testing: Test samples are provided with UART interface which makes it possible to control them through a test software installed on a notebook computer.

This software was running on the laptop computer connected to the EUT. It was used to enable the operation modes listed as below.

Test Software	HciHelper_V3.0
---------------	----------------

The samples were used as follows:

A003494675-003

A003494675-001

Full test was applied on all test modes, but only worst case was shown.

EUT Configure Mode	Applicable To			Mains Conducted Emission	Description
	Antenna Port Conducted Measurement	Radiated Spurious Emissions above 1 GHz	Radiated Spurious Emissions below 1 GHz		
-	√	√	√	-	-

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when position on **Y-plane**.
2. "-" means no effect.

#### Antenna Port Conducted Measurement

Pre-Scan full test was applied on all test modes, but only worst case was shown.

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
-	2402 to 2480	2402, 2440, 2480	1

#### Radiated Spurious Emissions (Above 1 GHz)

Pre-Scan full test was applied on all test modes, but only worst case was shown.

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
-	2402 to 2480	2402, 2440, 2480	1

#### Radiated Spurious Emissions (Below 1 GHz)

Pre-Scan full test was applied on all test modes, but only worst case was shown.

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
-	2402 to 2480	2402	1

#### Test Condition

Test Item	Ambient Temperature	Relative Humidity	Tested by
Conducted Measurement	24.4-24.8 °C	55.1-57.1 %	Blake Wang
Radiated Spurious Emissions above 1 GHz	24.6-25.7 °C	54-56 %	Chuan Chu
Radiated Spurious Emissions below 1 GHz	24.6-25.7 °C	54-56 %	Chuan Chu

## 4.4 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

### Accessory of EUT


None

### Support Unit

Support Unit								
No	Description	Brand	Model	S/N	Shielded	Ferrite Core (Qty)	Length (cm)	Remark
1	NB	HP	15s-du0007TX	CND93622WV	-	-	-	--
2	USB Cable	TUV	TUV-001	N/A	NO	NO	300	--
3	Uart	TUV	CP2102	N/A	-	-	-	--

## 4.5 Test Setup Diagram

<Radiated Spurious Emissions mode>

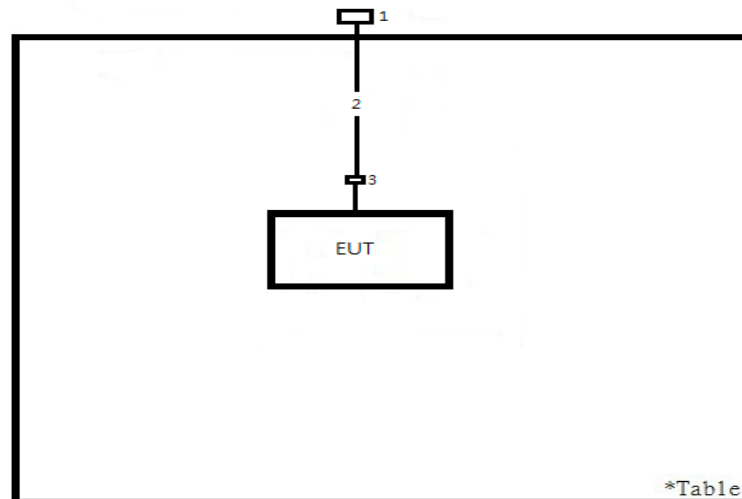

## 5. Test Results

### 5.1 Transmitter Requirement & Test Suites

#### 5.1.1 Antenna Requirement

**Requirement** Use of approved antennas only

According to the manufacturer declaration, the EUT has an antenna with a directional gain of 5 dBi. The antenna is monopole antenna with no possibility of replacement with a non-approved antenna by the end-user. Therefore, the EUT is considered to comply with this provision.


Refer to EUT photo for details.

### 5.1.2 Peak Output Power

**Limit** 1 watt (30 dBm)

**Kind of Test Site** Shielded room

**Test Setup**

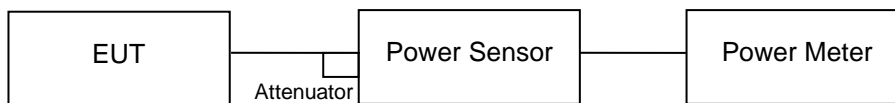

**Test Instruments**

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Power Meter	Anritsu	ML2495A	1901008	2023/3/17	2024/3/15	2023/7/4	2023/7/4
Power Sensor	Anritsu	MA2411B	1725269	2023/3/17	2024/3/15	2023/7/4	2023/7/4

**Test Procedures**

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

**Test Result**
**Peak Output Power**
**<1Mbps>**

Channel	Channel Frequency	Peak Output Power		Limit (dBm)
	(MHz)	(dBm)	(mW)	
Low Channel	2402	0.27	1.06	30
Middle Channel	2440	0.29	1.07	30
High Channel	2480	0.35	1.08	30

**Average Power (For Reference)**
**<1Mbps>**

Channel	Channel Frequency	Average Power	
	(MHz)	(dBm)	(mW)
Low Channel	2402	0.09	1.02
Middle Channel	2440	0.15	1.04
High Channel	2480	0.19	1.04




### 5.1.3 6 dB Bandwidth and 99% Occupied Bandwidth

**Limit** The minimum 6 dB bandwidth shall be at least 500 kHz.

**Kind of Test Site** Shielded room

#### Test Setup

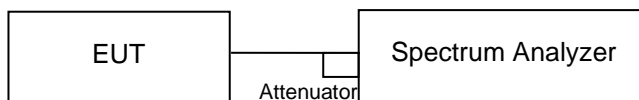

#### Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV	101512	2023/2/23	2024/2/22	2023/7/4	2023/7/4

#### Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz
- Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- For 99% occupied bandwidth measurement, the transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to PEAK. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean power of a given emission.

#### Test Results


Please refer to Appendix A.

### 5.1.4 Power Spectral Density

**Limit**

The power spectral density shall not be greater than 8 dBm in any 3 kHz band.

**Kind of Test Site**                      Shielded room

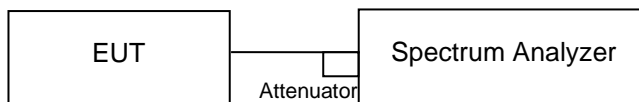**Test Setup**

**Test Instruments**

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV	101512	2023/2/23	2024/2/22	2023/7/4	2023/7/4

**Test Procedure**

- a. Set analyzer center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d. Set the VBW  $\geq 3 \times \text{RBW}$ .
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.

**Test Results**

Please refer to Appendix A.


## 5.1.5 Conducted Spurious Emissions and Frequency Band Edges Measured in 100kHz Bandwidth

### Limit

20dB (below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.)

**Kind of Test Site**                      Shielded room

### Test Setup

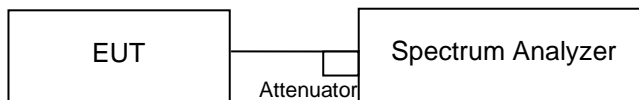

### Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV	101512	2023/2/23	2024/2/22	2023/7/4	2023/7/4

### Test Procedure

Measurement procedure REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

Measurement procedure OOBE

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

### Test Results

Please refer to Appendix A.

### 5.1.6 Radiated Spurious Emissions and Band Edges

#### Limit


Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a).

Emissions radiated outside the restricted and authorized frequency bands must either comply with the radiated emission limits specified for the restricted bands or in §15.247(d).


**Kind of Test Site**                      3m Semi-Anechoic Chamber

#### Test Setup


<Radiated Emissions below 30 MHz>

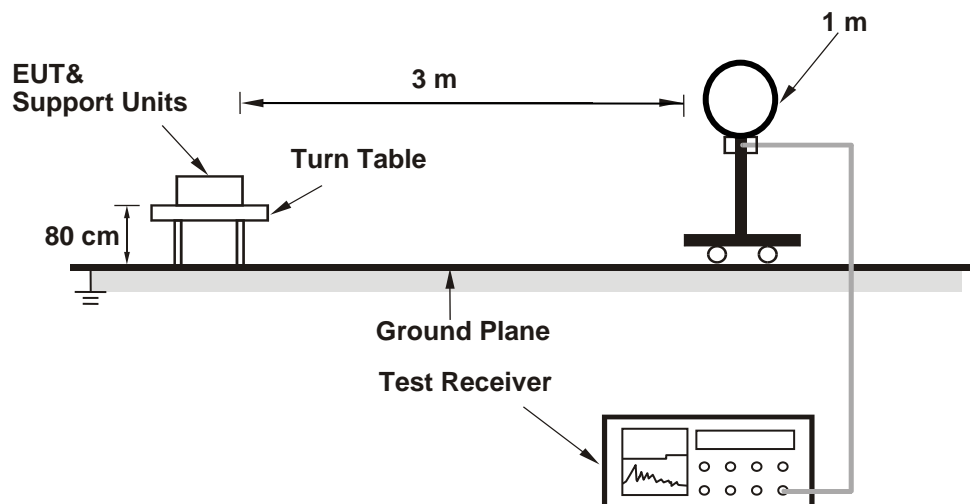

<Radiated Emissions 30 MHz to 1 GHz>

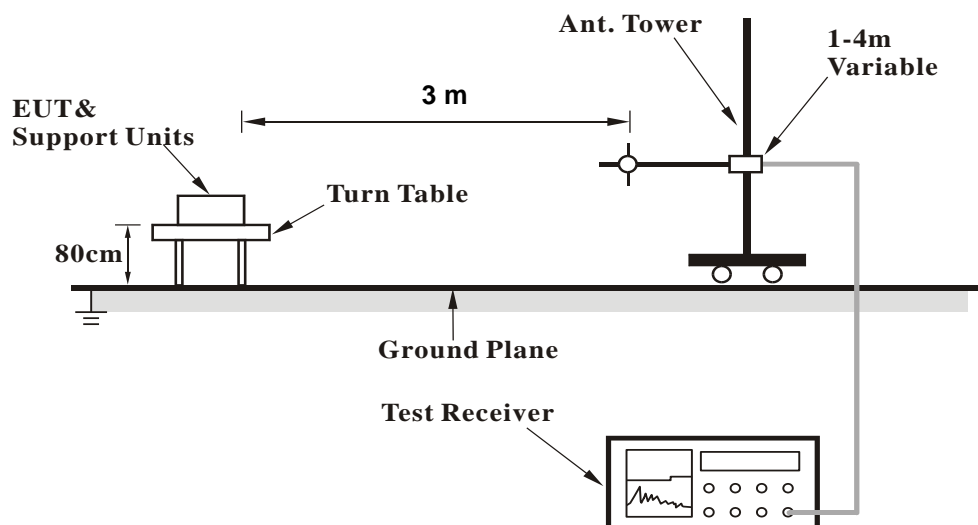

## &lt;Radiated Emissions above 1 GHz&gt;

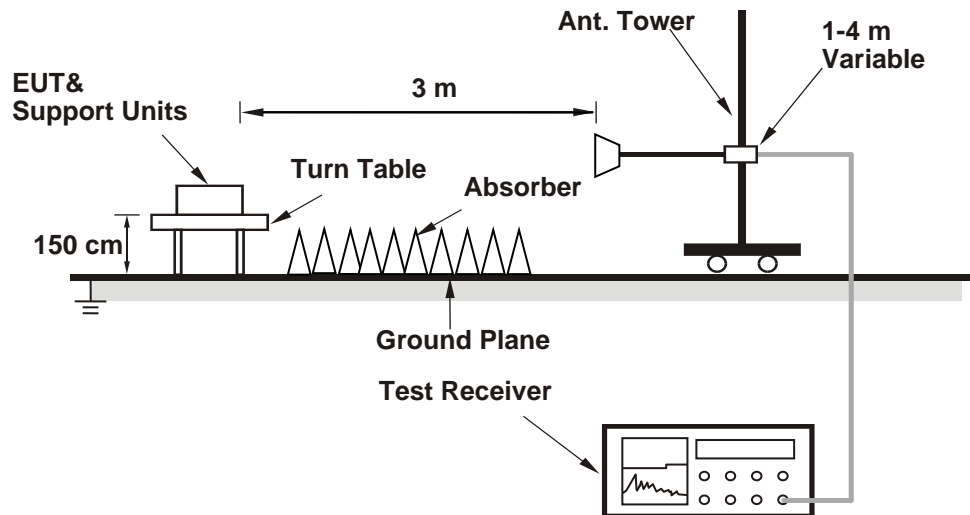

For the actual test configuration, please refer to the attached file (Test Setup Photo).

**Test Instruments**

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
<b>Above 1 GHz</b>					
Signal Analyzer	R&S	FSV40	101508	2023/4/20	2024/4/18
Horn Antenna	ETS-Lindgren	3117	00218929	2022/12/8	2023/12/7
HF-AMP + AC source	EMCI	EMC051845SE	980633	2023/2/22	2024/2/21
HF-AMP + AC source	EMCI	EMC184045SE	980657	2023/2/16	2024/2/15
Horn Antenna	SCHWARZBECK	BBHA 9170	00218930	2022/12/8	2023/12/7
Test Software	Audix E3	15914a_20191106 tuv	PK-001087	N/A	N/A
<b>30 MHz ~ 1 GHz</b>					
Receiver	R&S	ESR7	102109	2023/2/24	2024/2/23
Bilog Antenna	SCHWARZBECK	VULB9618	00951	2023/3/31	2024/3/30
LF-AMP	Agilent	8447D	2944A107722	2023/3/22	2024/3/20
Test Software	Audix E3	15914a_20191106 tuv	PK-001087	N/A	N/A
<b>Below 30 MHz</b>					
Receiver	R&S	ESR7	102109	2023/2/24	2024/2/23
Loop Antenna	SCHWARZBECK	FMZB 1519B	00215	2023/1/4	2024/1/3
Test Software	Audix E3	15914a_20191106 tuv	PK-001087	N/A	N/A

**Test Procedures****For Radiated Emissions below 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel (OPEN), perpendicular (CLOSE), and ground-parallel (GROUND) orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

## Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

**For Radiated Emissions above 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

## Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98 %) or 10 Hz (Duty cycle  $\geq 98$  %) for Average detection (AV) at frequency above 1 GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The Radiated Emissions testing was performed in the X(E1), Y(H) and Z(E2) axis orientation. The worst-case Axis orientation is recorded in this test report.
6. The emission levels of other frequencies (including the 10th harmonic of the highest fundamental frequency) are very lower than the limit and are not shown in the test report.

**Prüfbericht - Nr.:**      **CN23100U (P15C-BLE) 001**  
*Test Report No.*

**Seite 24 von 24**  
*Page 24 of 24*

**Test Results**

Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)

Level (dBuV/m) = Reading (dBuV) + Factor (dB/m)

Please refer to Appendix B.




## Appendix A: Test Results of Conducted Test

### Test Result of 6 dB Bandwidth


**BLE\_1M**

Channel	Channel Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)	Result
Low Channel	2402	0.70	> 0.5	Pass
Middle Channel	2440	0.70	> 0.5	Pass
High Channel	2480	0.68	> 0.5	Pass

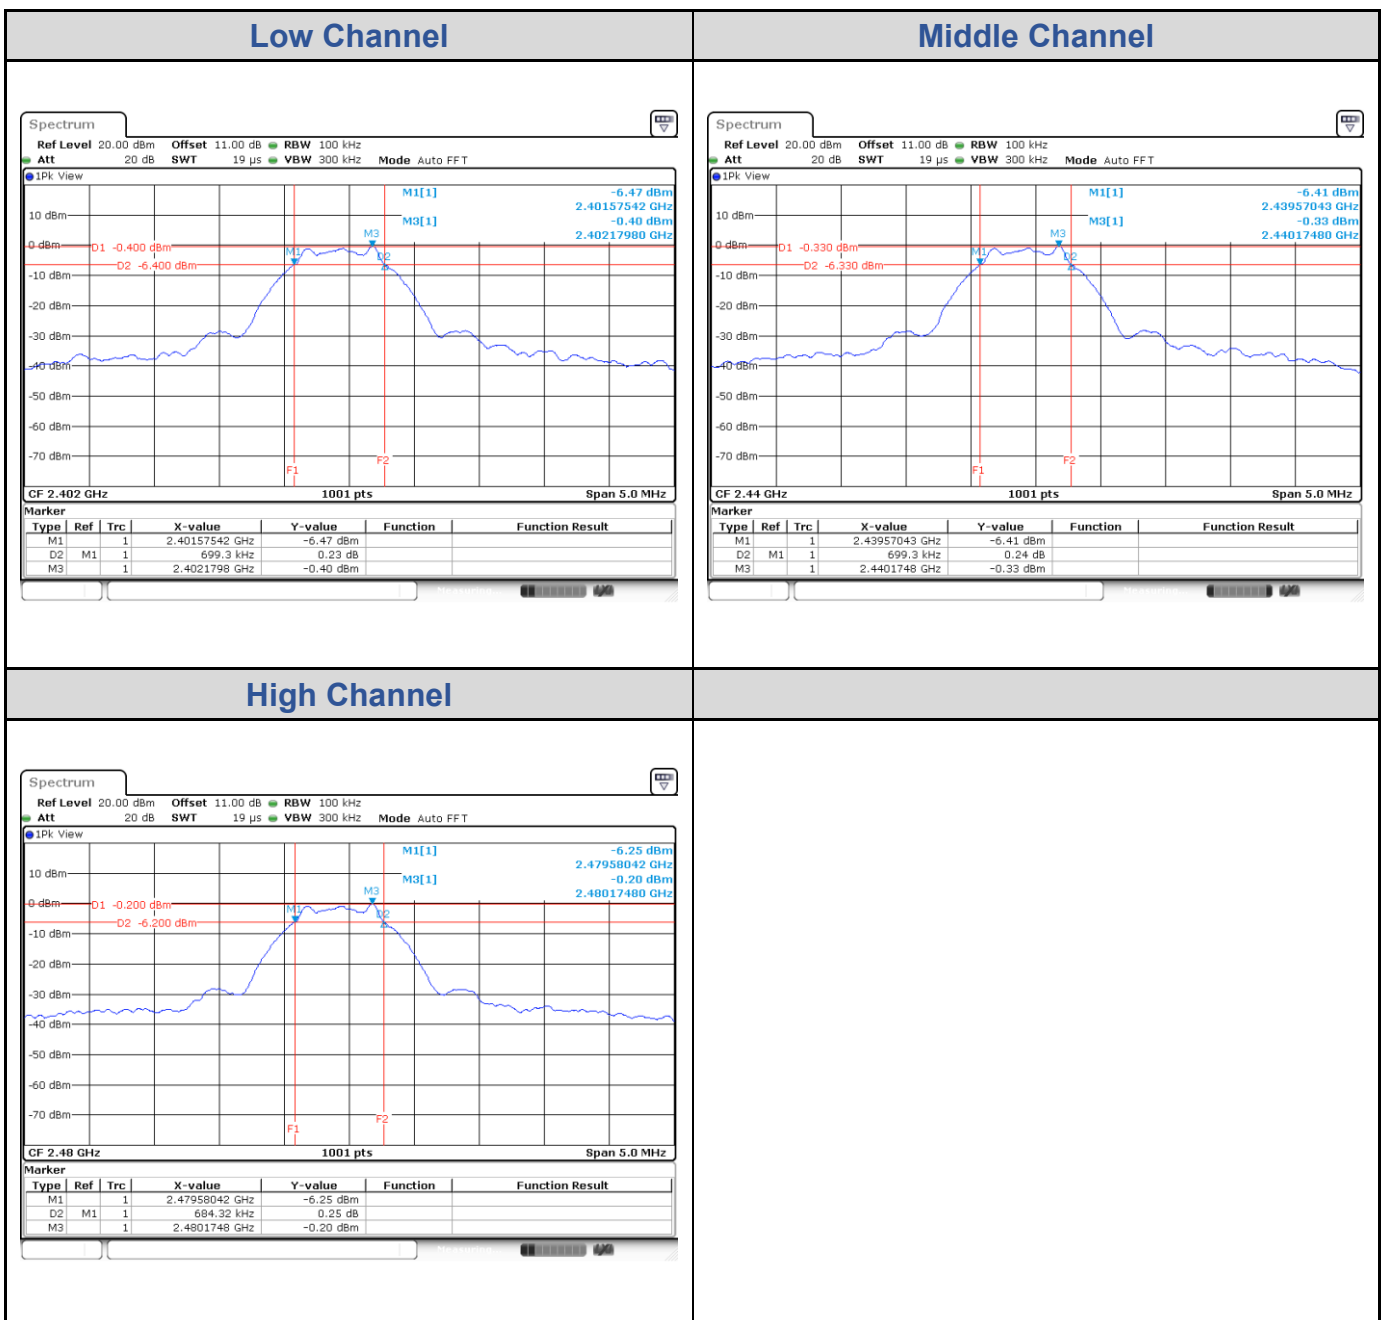

**Test Result of 99% Occupied Bandwidth**
**BLE\_1M**


Channel	Channel Frequency (MHz)	99% Bandwidth (MHz)
Low Channel	2402	1.07
Middle Channel	2440	1.07
High Channel	2480	1.08

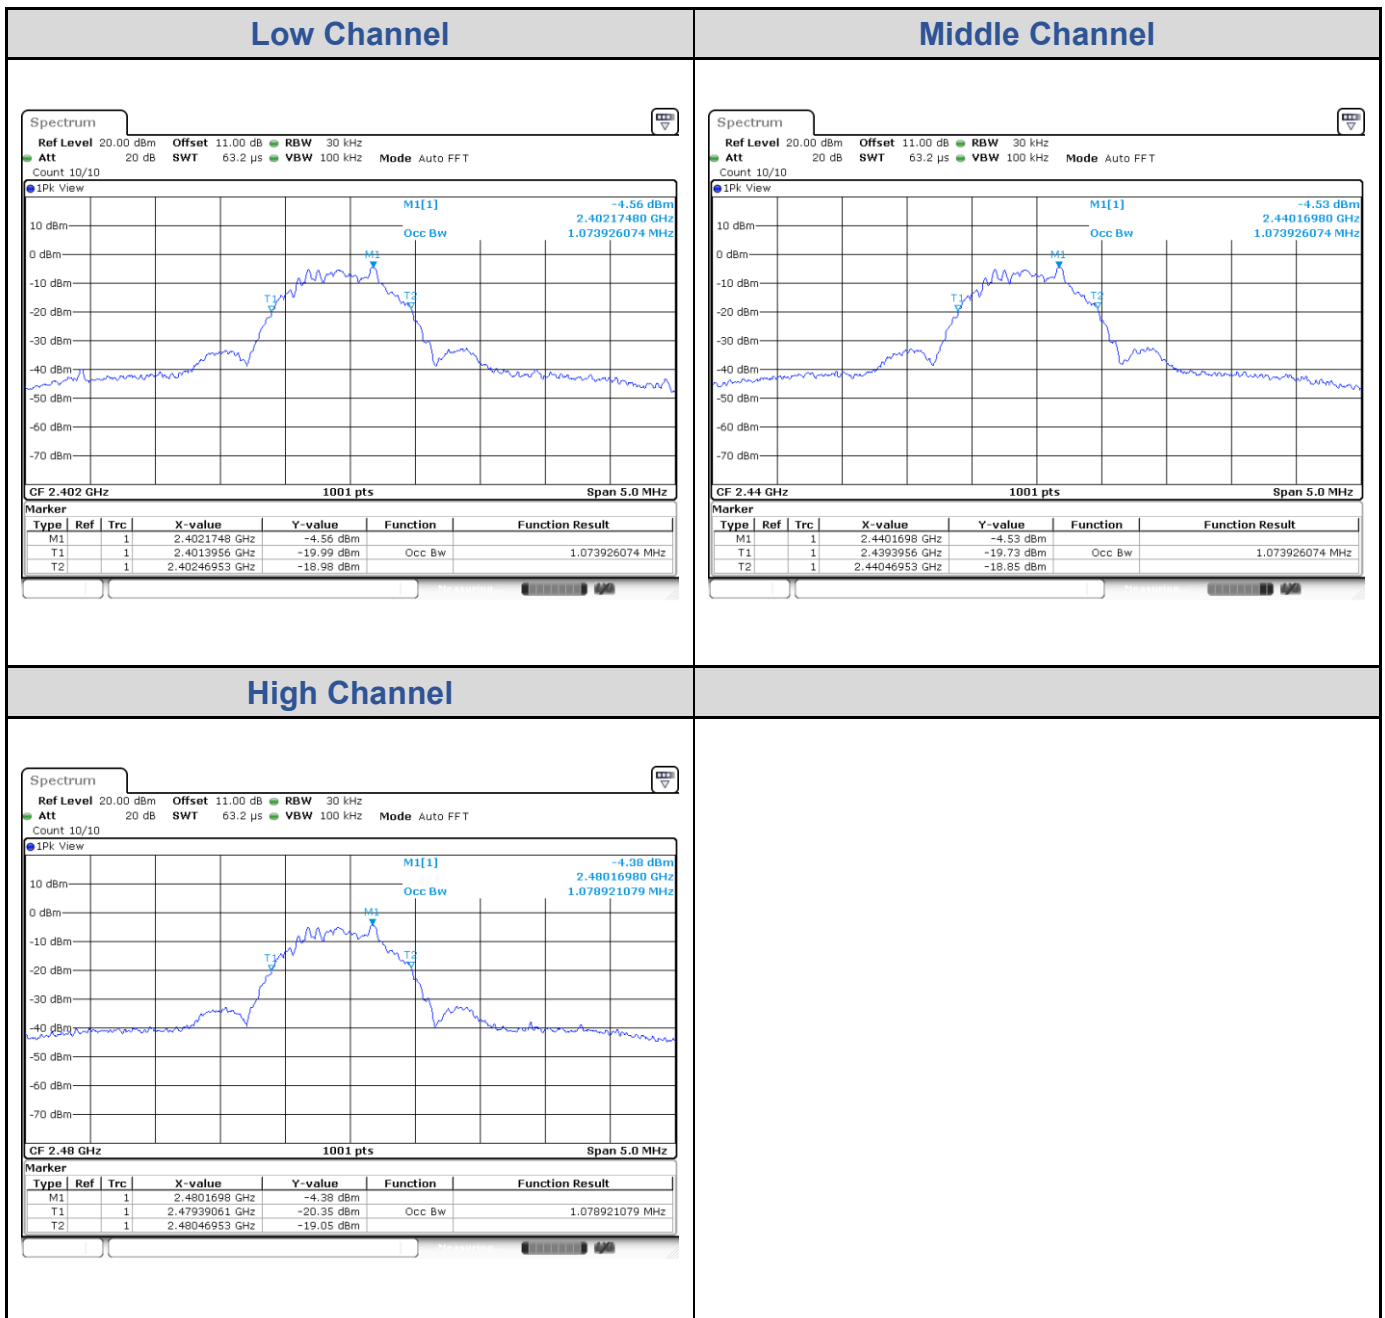


## Test Result of Power Spectral Density

### BLE\_1M


Channel	Channel Frequency (MHz)	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low Channel	2402	-17.03	8	Pass
Middle Channel	2440	-16.86	8	Pass
High Channel	2480	-16.76	8	Pass

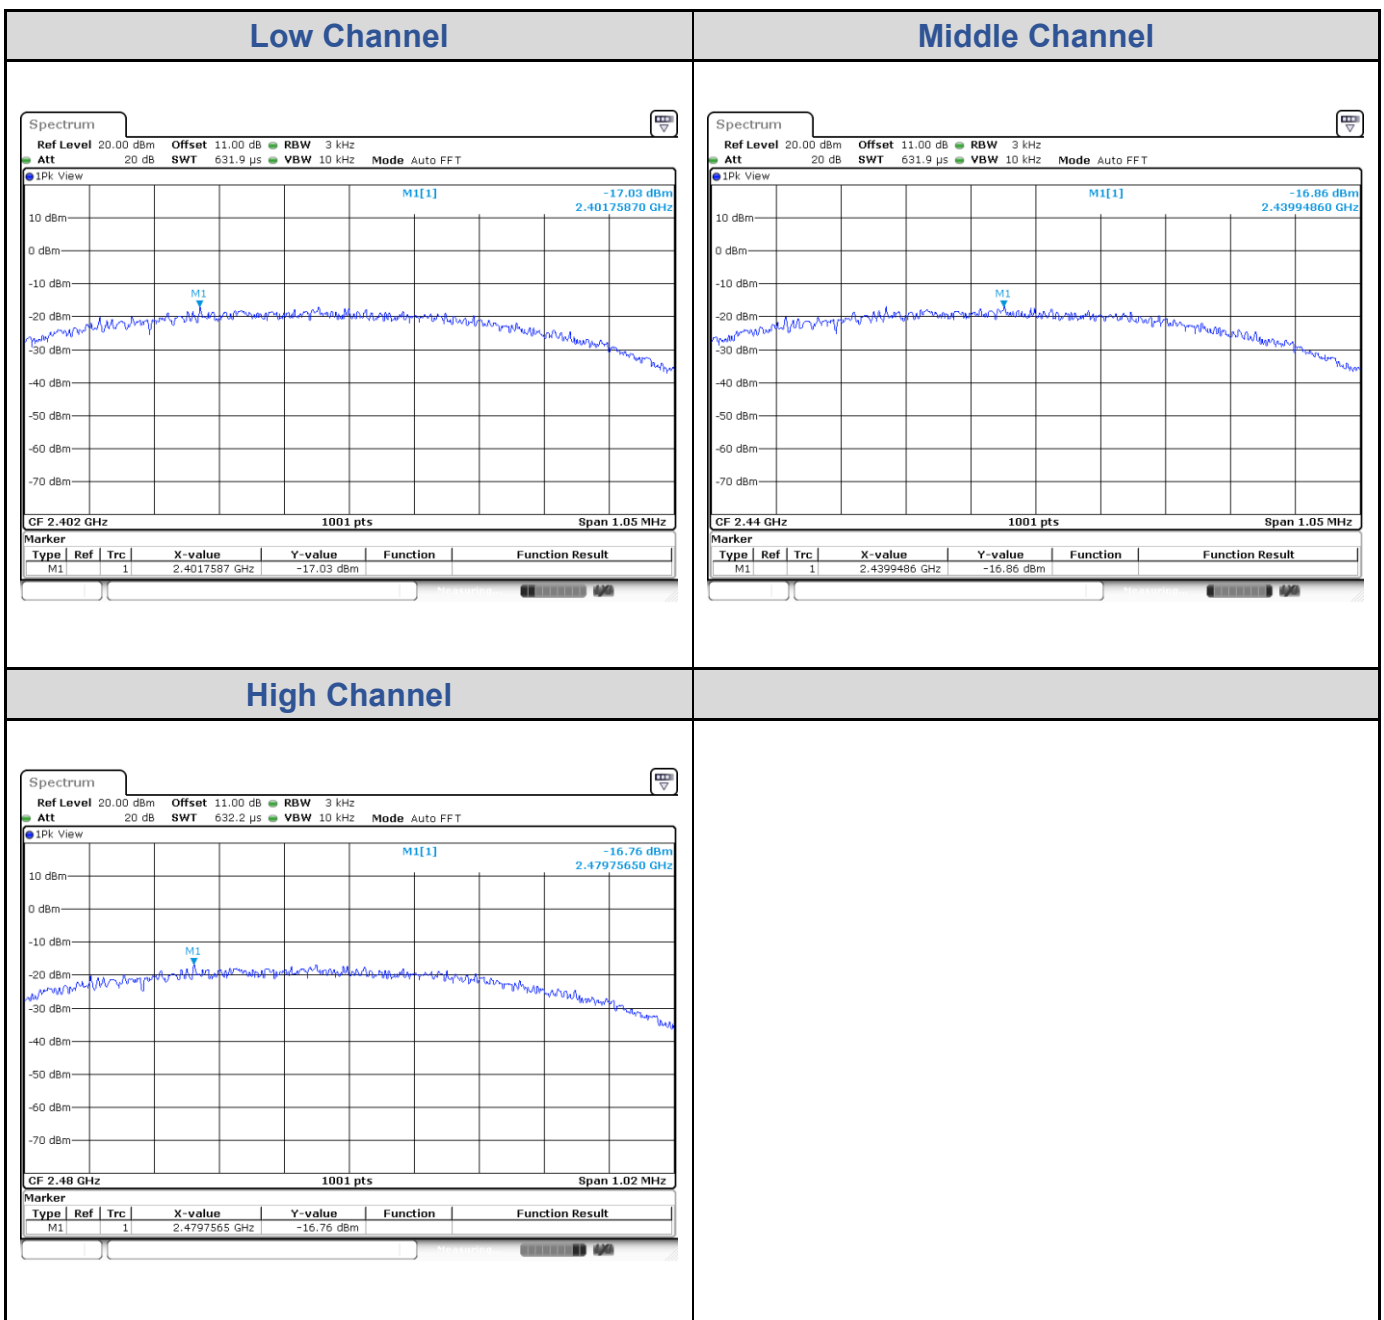

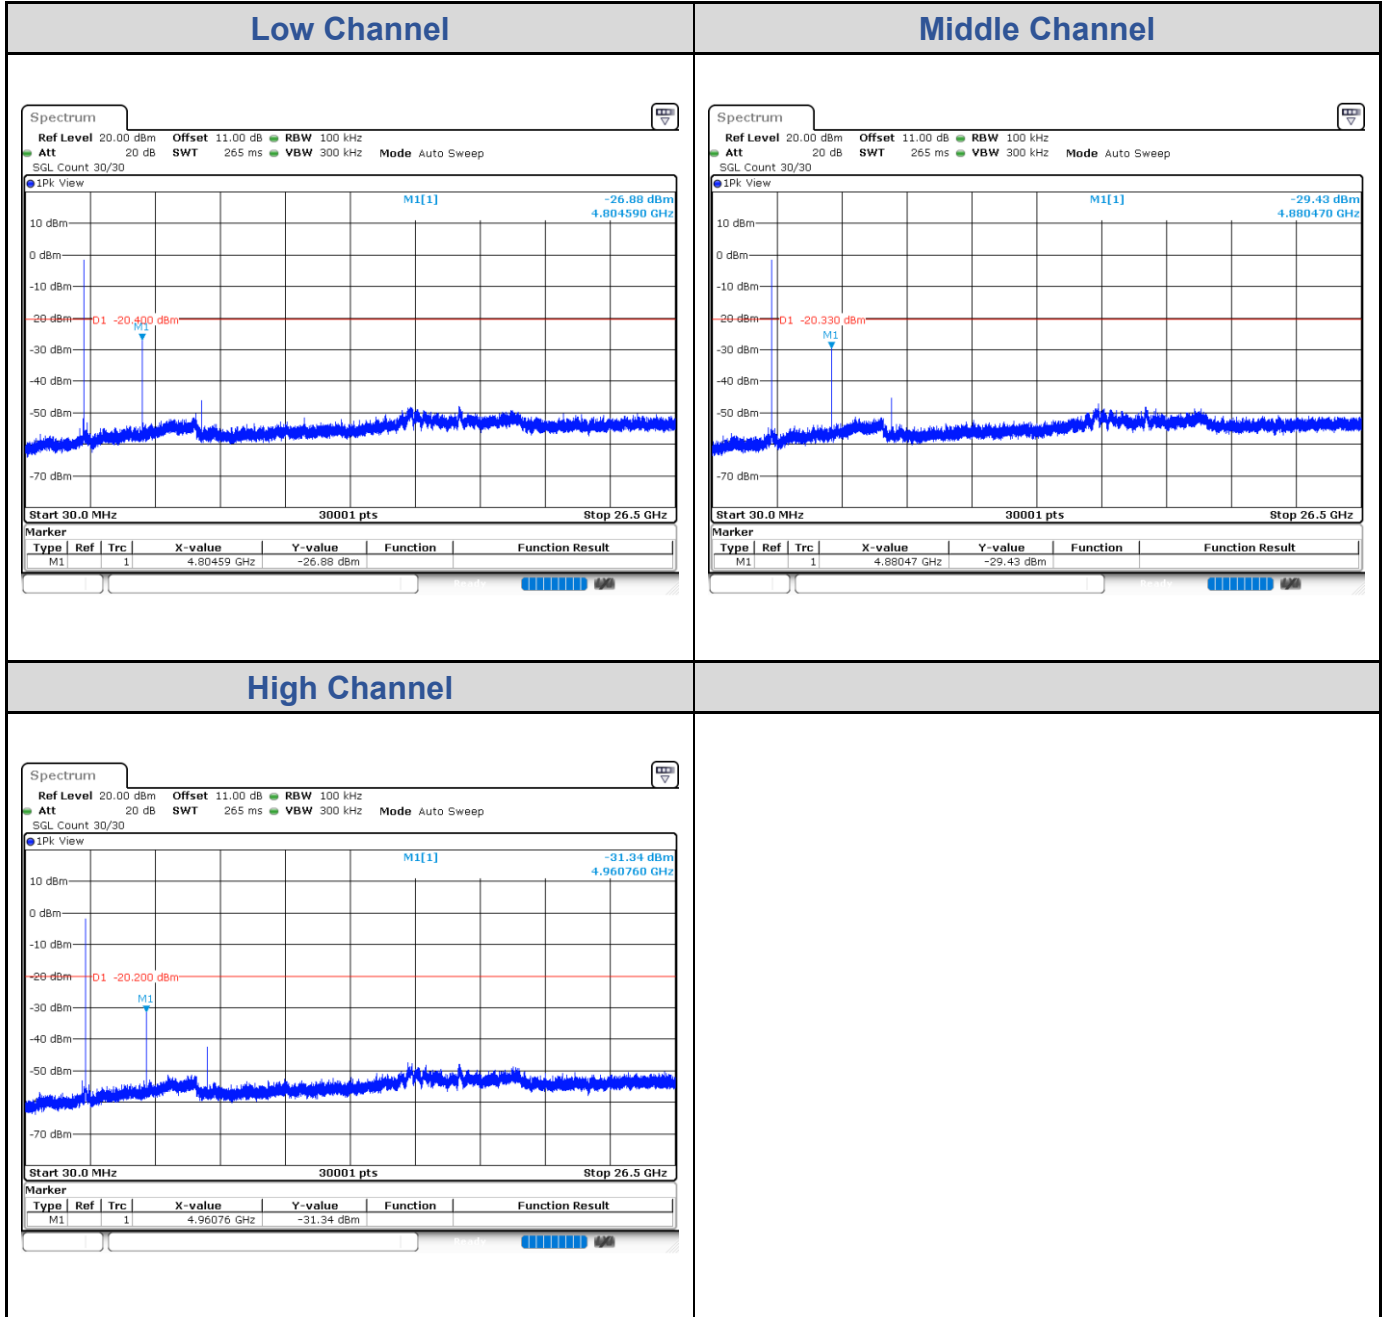**Test Result of Conducted Spurious Emissions, Tx Mode**
**BLE\_1M**


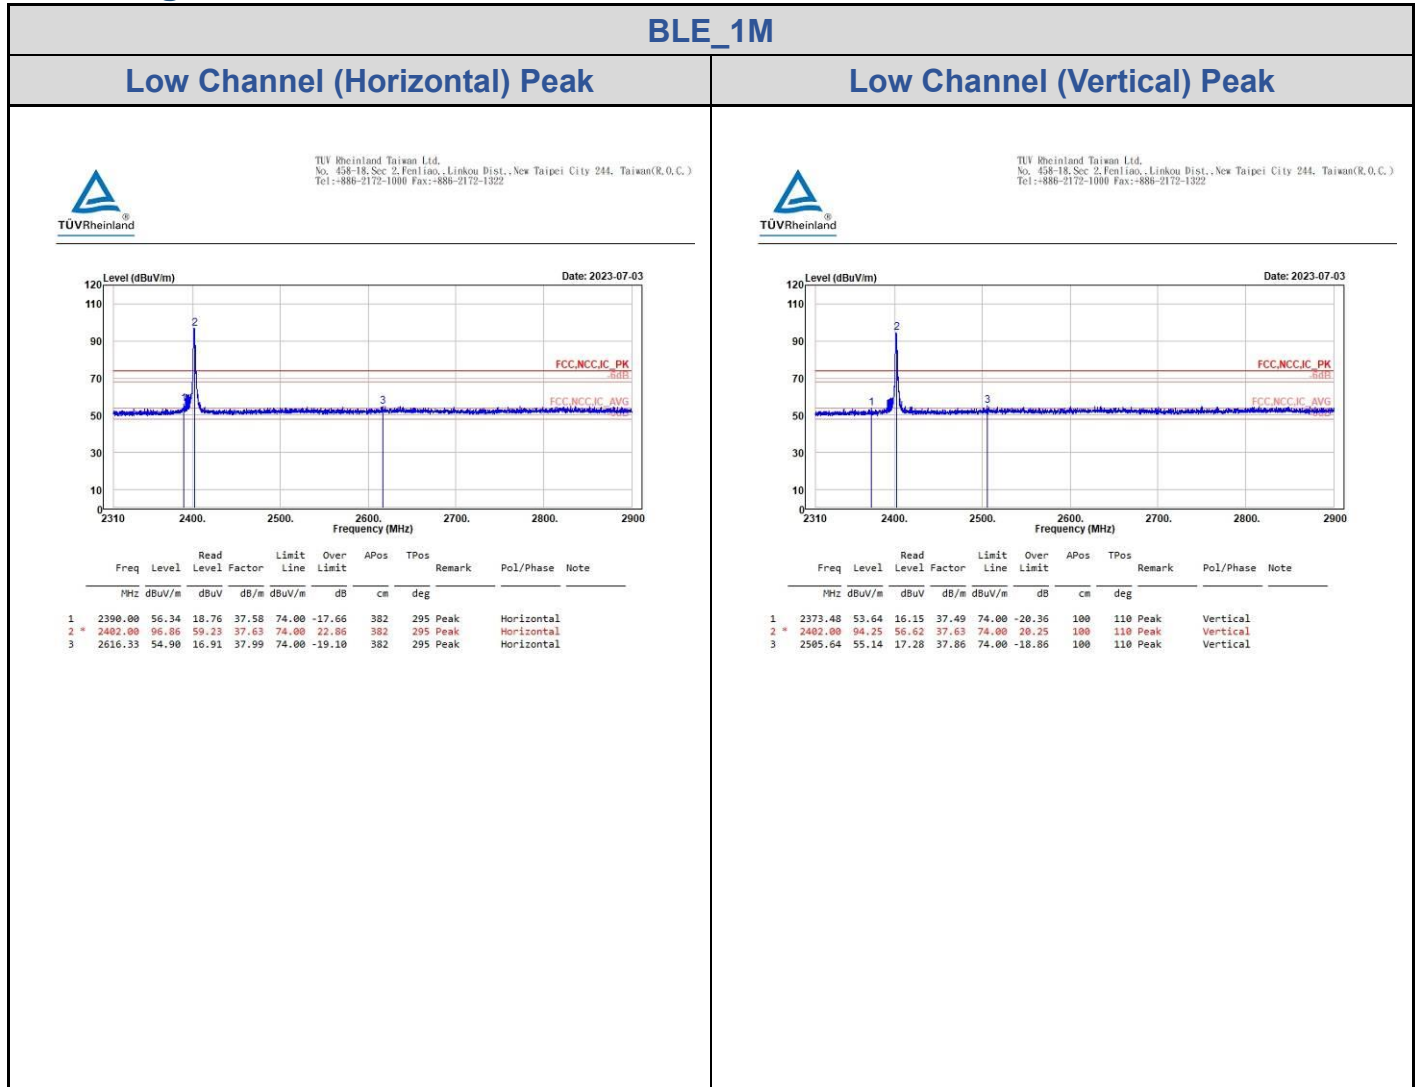
## Test Result of Conducted Band Edge, Tx Mode

### BLE\_1M

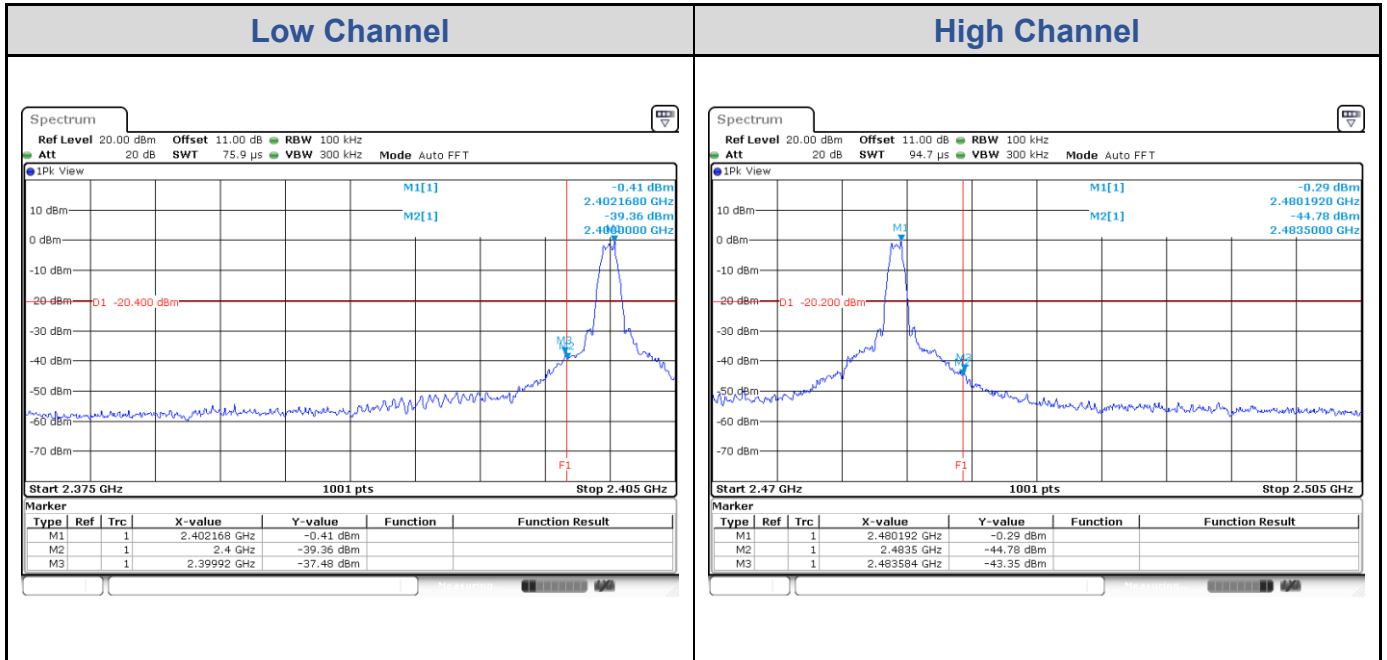

# Appendix B: Test Results of Radiated Spurious Emissions

## Band Edges, 2.31GHz ~ 2.9GHz




BLE\_1M

Low Channel (Horizontal) Average

Low Channel (Vertical) Average




TUV Rheinland Taiwan Ltd.  
No. 438-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1010 Fax: +886-2172-1322

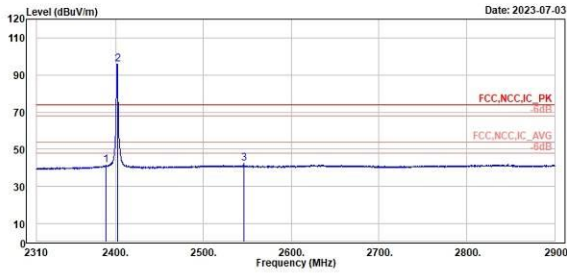

Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2380.82	41.31	3.73	37.58	54.00	-12.69	382	295 Average	Horizontal
2 *	2402.00	95.86	58.23	37.63	54.00	41.86	382	295 Average	Horizontal
3	2545.88	42.22	4.32	37.90	54.00	-11.78	382	295 Average	Horizontal




TUV Rheinland Taiwan Ltd.  
No. 438-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1010 Fax: +886-2172-1322

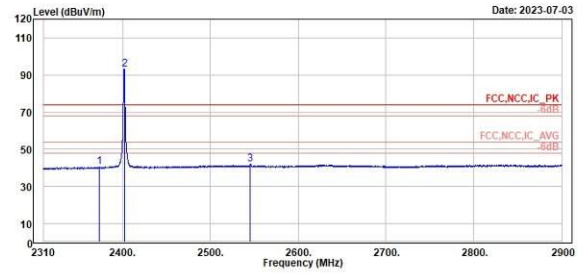

Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	2373.60	40.69	3.20	37.49	54.00	-13.31	100	110 Average	Vertical
2 *	2402.00	93.21	55.58	37.63	54.00	39.21	100	110 Average	Vertical
3	2545.65	41.92	4.02	37.90	54.00	-12.08	100	110 Average	Vertical

**BLE\_1M**
**Middle Channel (Horizontal) Peak**
**Middle Channel (Vertical) Peak**



TUV Rheinland Taiwan Ltd.  
 No. 438-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
 Tel: +886-2172-1010 Fax: +886-2172-1322

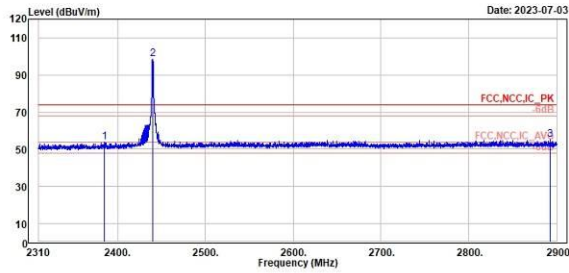

Peak	Freq (MHz)	Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit Line (dBuV/m)	Over Limit (dB)	APos (cm)	TPos (deg)	Remark	Pol/Phase	Note
1	2385.48	53.75	16.20	37.55	74.00	-20.25	328	293	Peak	Horizontal	
2 *	2440.00	98.58	60.82	37.68	74.00	24.58	328	293	Peak	Horizontal	
3	2892.92	55.15	16.77	38.38	74.00	-18.85	328	293	Peak	Horizontal	



TUV Rheinland Taiwan Ltd.  
 No. 438-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
 Tel: +886-2172-1010 Fax: +886-2172-1322

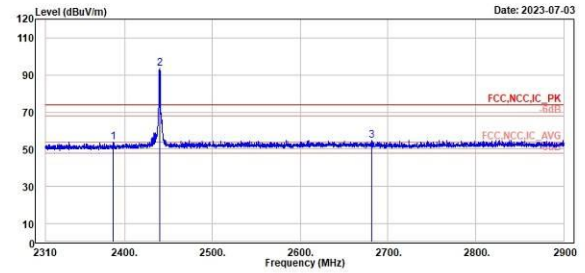


Peak	Freq (MHz)	Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit Line (dBuV/m)	Over Limit (dB)	APos (cm)	TPos (deg)	Remark	Pol/Phase	Note
1	2387.17	53.85	16.28	37.57	74.00	-20.15	100	128	Peak	Vertical	
2 *	2440.00	93.45	55.77	37.68	74.00	19.45	100	128	Peak	Vertical	
3	2681.23	54.92	16.98	37.94	74.00	-19.08	100	128	Peak	Vertical	



**BLE\_1M**
**Middle Channel (Horizontal) Average**
**Middle Channel (Vertical) Average**



TÜV Rheinland Taiwan Ltd.  
 No. 438-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
 Tel: +886-2172-1000 Fax: +886-2172-1322

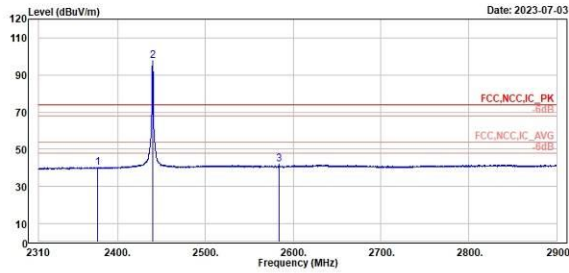

Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	2376.91	40.27	2.76	37.51	54.00	-13.73	328	293 Average	Horizontal	
2 *	2440.00	97.46	59.78	37.68	54.00	43.46	328	293 Average	Horizontal	
3	2583.64	41.87	3.92	37.95	54.00	-12.13	328	293 Average	Horizontal	



TÜV Rheinland Taiwan Ltd.  
 No. 438-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
 Tel: +886-2172-1000 Fax: +886-2172-1322


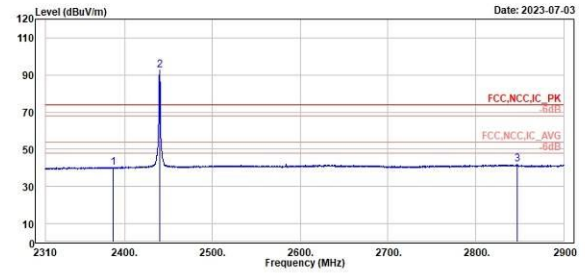


Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	2386.94	40.32	2.75	37.57	54.00	-13.68	100	128 Average	Vertical	
2 *	2440.00	92.42	54.74	37.68	54.00	38.42	100	128 Average	Vertical	
3	2846.90	41.91	3.74	38.17	54.00	-12.09	100	128 Average	Vertical	

BLE\_1M

High Channel (Horizontal) Peak

High Channel (Vertical) Peak

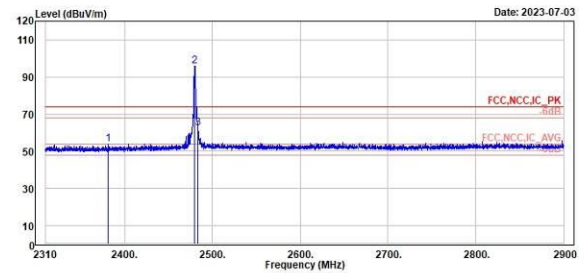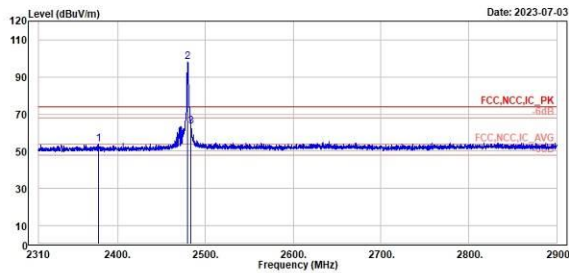

Peak	Freq (MHz)	Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit Line (dBuV/m)	Over Limit (dB)	APos (cm)	TPos (deg)	Remark	Pol/Phase	Note
1	2377.85	54.00	16.48	37.52	74.00	-20.00	314	292	Peak	Horizontal	
2 *	2480.00	97.93	60.14	37.79	74.00	23.93	314	292	Peak	Horizontal	
3	2483.46	63.32	25.52	37.80	74.00	-10.68	314	292	Peak	Horizontal	

Peak	Freq (MHz)	Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit Line (dBuV/m)	Over Limit (dB)	APos (cm)	TPos (deg)	Remark	Pol/Phase	Note
1	2381.39	53.68	16.14	37.54	74.00	-20.32	100	222	Peak	Vertical	
2 *	2480.00	95.98	58.11	37.79	74.00	21.98	100	222	Peak	Vertical	
3	2483.70	62.55	24.75	37.80	74.00	-11.45	100	222	Peak	Vertical	


BLE\_1M

High Channel (Horizontal) Average

High Channel (Vertical) Average




TUV Rheinland Taiwan Ltd.  
No. 438-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1010 Fax: +886-2172-1322

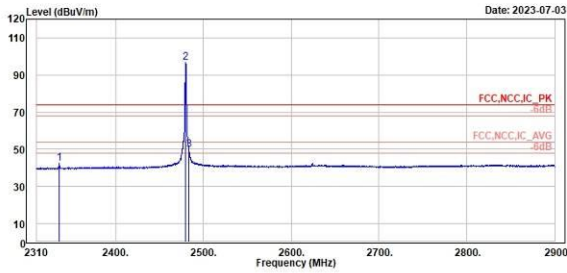

Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	2336.00	42.62	5.29	37.33	54.00	-11.38	314	292 Average	Horizontal	
2 *	2480.00	96.87	59.08	37.79	54.00	42.87	314	292 Average	Horizontal	
3 !	2483.46	49.90	12.10	37.80	54.00	-4.10	314	292 Average	Horizontal	



TUV Rheinland Taiwan Ltd.  
No. 438-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1010 Fax: +886-2172-1322

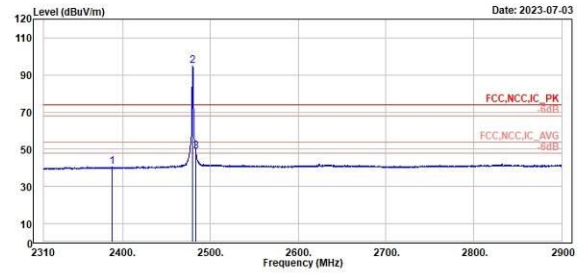

Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	2387.64	40.40	2.83	37.57	54.00	-13.60	100	222 Average	Vertical	
2 *	2480.00	94.90	57.11	37.79	54.00	40.90	100	222 Average	Vertical	
3 !	2483.46	48.61	10.81	37.80	54.00	-5.39	100	222 Average	Vertical	

Spurious Emissions, Tx Mode, 9kHz ~ 30MHz


BLE\_1M

Low Channel (Open) 9kHz~150kHz

Low Channel (Open) 150kHz~30MHz




TUV Rheinland Taiwan Ltd.  
No. 438-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1010 Fax: +886-2172-1322

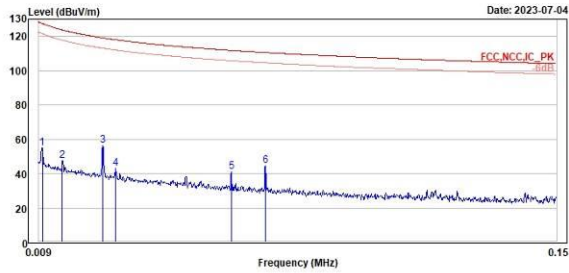

Peak	Freq (MHz)	Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit Line (dBuV/m)	Over Limit (dB)	APos (cm)	TPos (deg)	Remark	Pol/Phase	Note
1	0.01	54.71	36.99	17.72	127.60	-72.89	100	324	Peak	Open	
2	0.02	47.58	29.46	18.12	123.79	-76.21	100	201	Peak	Open	
3	0.03	56.51	37.56	18.95	119.13	-62.62	100	190	Peak	Open	
4	0.03	42.79	23.58	19.21	118.05	-75.26	100	232	Peak	Open	
5	0.06	41.15	22.30	18.85	111.82	-70.67	100	262	Peak	Open	
6	0.07	44.26	25.64	18.62	110.60	-66.34	100	169	Peak	Open	



TUV Rheinland Taiwan Ltd.  
No. 438-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1010 Fax: +886-2172-1322

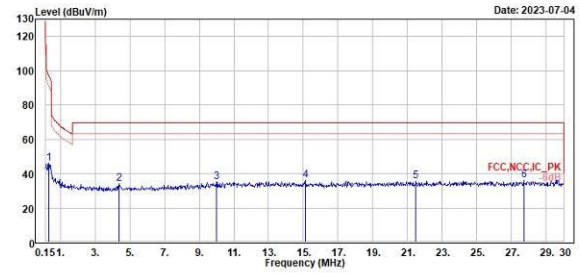

Peak	Freq (MHz)	Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit Line (dBuV/m)	Over Limit (dB)	APos (cm)	TPos (deg)	Remark	Pol/Phase	Note
1	0.33	45.73	26.98	18.75	97.26	-51.53	100	170	Peak	Open	
2	4.39	33.89	14.36	19.53	69.50	-35.61	100	73	Peak	Open	
3	10.00	35.17	13.61	21.56	69.50	-34.33	100	95	Peak	Open	
4	15.10	36.04	14.13	21.91	69.50	-33.46	100	360	Peak	Open	
5	21.49	35.36	13.11	22.25	69.50	-34.14	100	261	Peak	Open	
6	27.70	36.05	13.74	22.31	69.50	-33.45	100	258	Peak	Open	

Spurious Emissions, Tx Mode, 30MHz ~ 1GHz


BLE\_1M

Low Channel (Horizontal)

Low Channel (Vertical)




TUV Rheinland Taiwan Ltd.  
No. 438-18, Sec 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

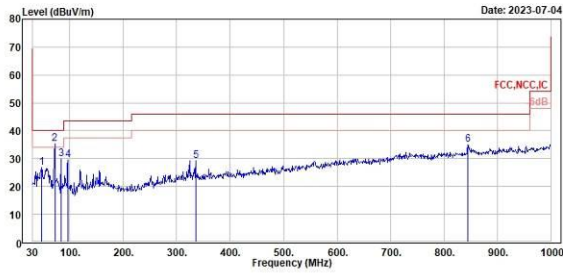

Peak	Freq (MHz)	Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit Line (dBuV/m)	Over Limit (dB)	APos (cm)	TPos (deg)	Remark	Pol/Phase	Note
1	46.49	26.62	33.74	-7.12	48.00	-13.38	200	74	Peak	Horizontal	
2	71.71	35.43	45.73	-10.30	48.00	-4.57	200	50	Peak	Horizontal	
3	83.35	29.75	42.60	-12.85	48.00	-18.25	200	50	Peak	Horizontal	
4	95.96	29.41	42.02	-12.61	43.50	-14.09	200	115	Peak	Horizontal	
5	335.55	29.19	34.69	-5.50	46.00	-16.81	100	71	Peak	Horizontal	
6	844.00	34.96	31.24	3.72	46.00	-11.04	300	215	Peak	Horizontal	



TUV Rheinland Taiwan Ltd.  
No. 438-18, Sec 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

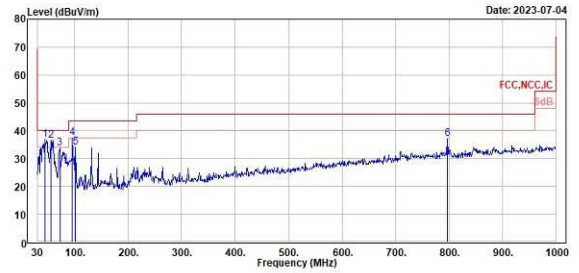

Peak	Freq (MHz)	Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit Line (dBuV/m)	Over Limit (dB)	APos (cm)	TPos (deg)	Remark	Pol/Phase	Note
1	44.55	36.70	44.07	-7.37	48.00	-3.30	100	229	Peak	Vertical	
2	55.22	36.51	43.70	-7.19	48.00	-3.49	100	24	Peak	Vertical	
3	71.71	33.62	43.92	-10.30	48.00	-6.38	200	330	Peak	Vertical	
4	94.99	37.56	50.48	-12.92	43.50	-5.94	300	54	Peak	Vertical	
5	101.78	33.96	45.74	-11.78	43.50	-9.54	100	168	Peak	Vertical	
6	797.27	37.21	34.06	3.15	46.00	-8.79	100	118	Peak	Vertical	

Spurious Emissions, Tx Mode, 1GHz ~ 26.5GHz


BLE\_1M

Low Channel (Horizontal)

Low Channel (Vertical)




TUV Rheinland Taiwan Ltd.  
No. 438-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1010 Fax: +886-2172-1322

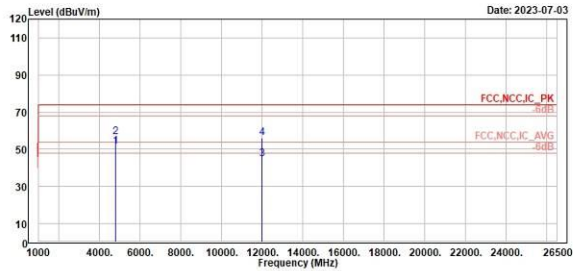

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
1	Level	Read	Level	Factor	Limit	Over	Apos	TPos	Remark	Pol/Phase	Note								
1	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg											
1	4804.00	51.54	61.94	-10.40	54.00	-2.46	100	164	Average	Horizontal									
2	4804.00	56.76	67.16	-10.40	74.00	-17.24	100	164	Peak	Horizontal									
3	12010.00	44.84	46.52	-1.68	54.00	-9.16	111	242	Average	Horizontal									
4	12010.00	55.97	57.65	-1.68	74.00	-18.03	111	242	Peak	Horizontal									



TUV Rheinland Taiwan Ltd.  
No. 438-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1010 Fax: +886-2172-1322

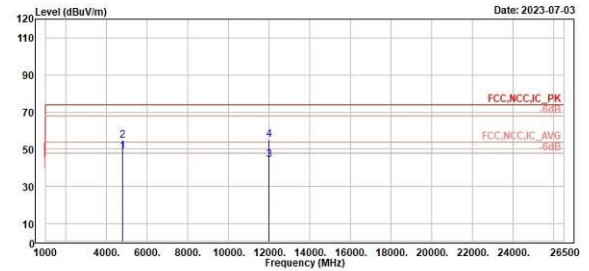

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
1	Level	Read	Level	Factor	Limit	Over	Apos	TPos	Remark	Pol/Phase	Note								
1	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg											
1	4804.00	40.94	59.34	-18.40	54.00	-5.06	100	132	Average	Vertical									
2	4804.00	54.61	65.01	-10.40	74.00	-19.39	100	132	Peak	Vertical									
3	12010.00	44.14	45.82	-1.68	54.00	-9.86	100	260	Average	Vertical									
4	12010.00	55.19	56.87	-1.68	74.00	-18.81	100	260	Peak	Vertical									


BLE\_1M

Middle Channel (Horizontal)

Middle Channel (Vertical)




TUV Rheinland Taiwan Ltd.  
No. 438-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1010 Fax: +886-2172-1322

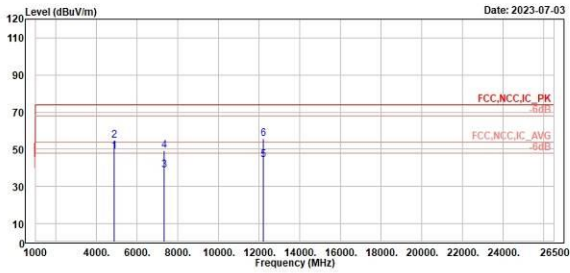

1	2	3	4	5	6				
Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
48.99	59.32	-10.33	54.00	-5.01	100	158	Average	Horizontal	
54.72	65.05	-10.33	74.00	-19.28	100	158	Peak	Horizontal	
38.59	47.09	-8.50	54.00	-15.41	100	141	Average	Horizontal	
49.07	57.57	-8.50	74.00	-24.93	100	141	Peak	Horizontal	
44.44	45.81	-1.37	54.00	-9.56	100	244	Average	Horizontal	
55.72	57.09	-1.37	74.00	-16.28	100	244	Peak	Horizontal	



TUV Rheinland Taiwan Ltd.  
No. 438-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1010 Fax: +886-2172-1322

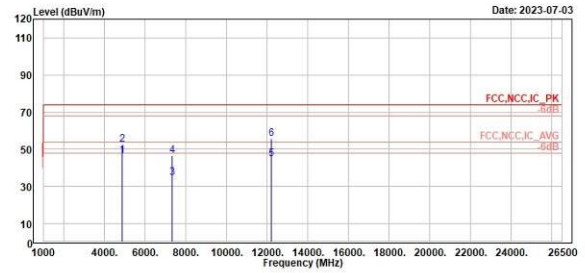

1	2	3	4	5	6				
Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
46.65	56.98	-10.33	54.00	-7.35	100	199	Average	Vertical	
52.52	62.85	-10.33	74.00	-21.48	100	199	Peak	Vertical	
34.90	43.40	-8.50	54.00	-19.10	100	18	Average	Vertical	
46.64	55.14	-8.50	74.00	-27.36	100	18	Peak	Vertical	
44.67	46.04	-1.37	54.00	-9.33	100	257	Average	Vertical	
55.76	57.13	-1.37	74.00	-16.24	100	257	Peak	Vertical	

BLE\_1M

High Channel (Horizontal)



High Channel (Vertical)



TUV Rheinland Taiwan Ltd.  
No. 438-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322



TUV Rheinland Taiwan Ltd.  
No. 438-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)  
Tel: +886-2172-1000 Fax: +886-2172-1322

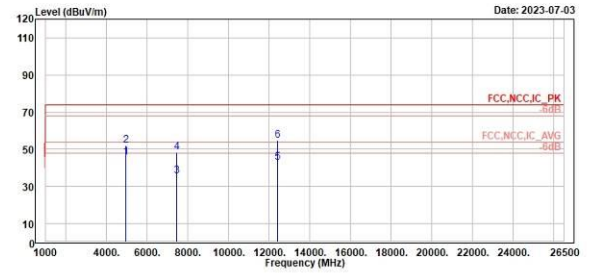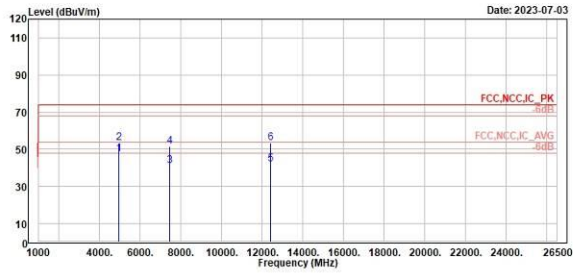

1	2	3	4	5	6				
Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
4960.00	47.61	57.83	-10.22	54.00	-6.39	100	161 Average	Horizontal	
4960.00	53.61	63.83	-10.22	74.00	-20.39	100	161 Peak	Horizontal	
7440.00	41.02	49.34	-8.32	54.00	-12.98	100	143 Average	Horizontal	
7440.00	51.38	59.70	-8.32	74.00	-22.62	100	143 Peak	Horizontal	
12400.00	41.76	43.12	-1.36	54.00	-12.24	100	250 Average	Horizontal	
12400.00	53.33	54.69	-1.36	74.00	-20.67	100	250 Peak	Horizontal	

1	2	3	4	5	6				
Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
4960.00	45.70	55.92	-10.22	54.00	-8.30	389	247 Average	Vertical	
4960.00	51.87	62.09	-10.22	74.00	-22.13	389	247 Peak	Vertical	
7440.00	35.69	44.01	-8.32	54.00	-18.31	100	139 Average	Vertical	
7440.00	48.24	56.56	-8.32	74.00	-25.76	100	139 Peak	Vertical	
12400.00	42.90	44.26	-1.36	54.00	-11.10	100	261 Average	Vertical	
12400.00	54.71	56.07	-1.36	74.00	-19.29	100	261 Peak	Vertical	