



## FCC / IC Test Report

FOR:

# Respironics, Inc.

Marketing Name: / Model No:

DreamStation Go / DSG500S11

Product Description:

Positive Airway Pressure (PAP) Device.

FCC ID: THO1116426

IC ID: 3234B-1116426

Applied Rules and Standards:

47 CFR Part 15.247 (DTS)

RSS-247 Issue 1 (DTSs)

RSS-Gen Issue 4

**REPORT #:** EMC-PHIL4-028-16001-15-247-DTS-Rev1

**DATE:** 2017-04-04



**A2LA Accredited**

**IC recognized #  
3462B-1**

**CETECOM Inc.**

411 Dixon Landing Road ♦ Milpitas, CA 95035 ♦ U.S.A.

Phone: + 1 (408) 586 6200 ♦ Fax: + 1 (408) 586 6299 ♦ E-mail: [info@cetecom.com](mailto:info@cetecom.com) ♦ <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2905571



**TABLE OF CONTENTS**

**1 ASSESSMENT..... 3**

**2 ADMINISTRATIVE DATA ..... 4**

2.1 IDENTIFICATION OF THE TESTING LABORATORY ISSUING THE EMC TEST REPORT ..... 4

2.2 IDENTIFICATION OF THE CLIENT ..... 4

2.3 IDENTIFICATION OF THE MANUFACTURER..... 4

**3 EQUIPMENT UNDER TEST (EUT)..... 5**

3.1 EUT SPECIFICATIONS ..... 5

3.2 EUT SAMPLE DETAILS ..... 6

3.3 ACCESSORY EQUIPMENT (AE) DETAILS..... 6

3.4 TEST SAMPLE CONFIGURATION ..... 6

**4 SUBJECT OF INVESTIGATION ..... 7**

**5 MEASUREMENT RESULTS SUMMARY ..... 7**

**6 MEASUREMENTS..... 8**

6.1 MEASUREMENT UNCERTAINTY ..... 8

6.2 ENVIRONMENTAL CONDITIONS DURING TESTING: ..... 8

6.3 DATES OF TESTING: ..... 8

**7 MEASUREMENT PROCEDURES ..... 9**

7.1 RADIATED MEASUREMENT..... 9

7.2 POWER LINE CONDUCTED MEASUREMENT PROCEDURE ..... 11

**8 TEST RESULT DATA ..... 12**

8.1 OUTPUT POWER VERIFICATION ..... 12

8.2 RADIATED TRANSMITTER SPURIOUS EMISSIONS ..... 16

8.3 AC POWER LINE CONDUCTED EMISSIONS ..... 30

**9 TEST SETUP PHOTOS ..... 32**

**10 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTING ..... 32**

**11 REVISION HISTORY ..... 33**



**1 Assessment**

The following device was evaluated against the applicable criteria specified in FCC rules Parts 15.247 of Title 47 of the Code of Federal Regulations and the relevant IC standard RSS-247 Issue 1, and RSS-Gen Issue 4.

No deviations were ascertained.

Company	Description	Model #
Respironics, Inc.	Positive Airway Pressure (PAP) Device	DSG500S11

**Responsible for Testing Laboratory:**

Peter Nevermann

2017-04-04 Compliance (Director Radio Communications and EMC)

Date	Section	Name	Signature
------	---------	------	-----------

**Responsible for the Report:**

James Donnellan

2017-04-04 Compliance (Sr. EMC Engineer)

Date	Section	Name	Signature
------	---------	------	-----------

The test results of this test report relate exclusively to the test item specified in Section 3. CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM Inc. USA.

## 2 Administrative Data

### 2.1 Identification of the Testing Laboratory Issuing the EMC Test Report

<b>Company Name:</b>	CETECOM Inc.
<b>Department:</b>	Compliance
<b>Street Address:</b>	411 Dixon Landing Road
<b>City/Zip Code</b>	Milpitas, CA 95035
<b>Country</b>	USA
<b>Telephone:</b>	+1 (408) 586 6200
<b>Fax:</b>	+1 (408) 586 6299
<b>Director Radio Communications and EMC</b>	Peter Nevermann
<b>Responsible Project Leader:</b>	James Donnellan

### 2.2 Identification of the Client

<b>Applicant's Name:</b>	Respironics, Inc.
<b>Street Address:</b>	1740 Golden Mile Highway
<b>City/Zip Code</b>	Monroeville, PA 15146
<b>Country</b>	USA
<b>Contact Person:</b>	Roger Strane
<b>Phone No.</b>	724-387-4813
<b>e-mail:</b>	roger.strane@philips.com

### 2.3 Identification of the Manufacturer

<b>Manufacturer's Name:</b>	Respironics, Inc.
<b>Manufacturers Address:</b>	1001 Murry Ridge Lane
<b>City/Zip Code</b>	Murrysville, PA 15668
<b>Country</b>	USA

**3 Equipment Under Test (EUT)****3.1 EUT Specifications**

<b>Model No</b>	DSG500S11
<b>HW Version</b>	EB3
<b>SW Version</b>	B0_002.001.014.0533.0574
<b>FCC-ID</b>	THO1116426
<b>IC-ID</b>	3234B-1116426
<b>HVIN</b>	DSG500S11
<b>PMN</b>	DreamStation Go
<b>Product Description</b>	Positive Airway Pressure (PAP) Device
<b>Integrated Module</b>	Leverage Phillips DreamStation BT Module approval for FCC ID:THO1116426 / ICID:3234B-1116426
<b>Frequency Range / number of channels</b>	Nominal band: 2402 – 2480; Center to center: 2402(ch 0) – 2480(ch 39), 40 channels
<b>Type(s) of Modulation</b>	Bluetooth version 4.0, Low Energy, GFSK modulation.
<b>Modes of Operation</b>	GFSK
<b>Antenna Information as declared</b>	PIFA Antenna, max gain = 1.5 dBi
<b>Max. Output Powers</b>	Peak Conducted Power 6.34 dBm Per Original Equipment
<b>Power Supply/ Rated Operating Voltage Range</b>	AC Input:100-240V, 50-60 Hz
<b>Operating Temperature Range</b>	Tlow: 5°C/ Tnom: 22°C/ Tmax: 35°C
<b>Other Radios included in the device</b>	Bluetooth 2.1
<b>Sample Revision</b>	<input type="checkbox"/> Prototype Unit <input checked="" type="checkbox"/> Production Unit <input type="checkbox"/> Pre-Production
<b>EUT Dimensions</b>	150mm x 150mm x 55mm
<b>EUT Diameter</b>	<input checked="" type="checkbox"/> < 60 cm <input type="checkbox"/> Other _____

### 3.2 EUT Sample details

EUT #	Serial Number	HW Version	SW Version	Notes/Comments
1	JTEB3200398AB	EB3	BO_002.001.014.0533.0574	Radiated Sample

### 3.3 Accessory Equipment (AE) details

AE #	Type	Model	Manufacturer	Serial Number
1	-	-	-	-

### 3.4 Test Sample Configuration

EUT Set-up #	Combination of AE used for test set up	Comments
1	EUT#1	Laptop Used to set channels

#### 4 Subject of Investigation

The objective of the measurements done by CETECOM Inc. and this test report is to support a request for an Additional equipment authorization under the FCC ID: THO1116426 and IC ID: 3234B-1116426.

According to the guidelines from FCC KDB 996369 for the product under evaluation, and the pre-certified module to be integrated (WL1831MOD) as described in Section 3, the output power has been verified to be within the specified production tolerances and measurement uncertainties, and where relevant test procedures did not change the conducted test results from module certification are re-used. Full Radiated Spurious Emissions test was conducted according to the relevant requirements specified in FCC rules Part 15.247 of Title 47 of the Code of Federal Regulations and Radio Standard Specification RSS-247 Issue 1 of Industry Canada.

The original test data can be obtained under the FCC Filing ID: THO1116426 and IC Filing: 3234B-1116426.

Testing procedures are based on 558074 D01 DTS Meas Guidance v03r05 – “GUIDANCE FOR PERFORMING COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEMS (DTS) OPERATING UNDER §15.247; April 8, 2016” by the Federal Communications Commission, Office of Engineering and Technology, Laboratory Division.

#### 5 Measurement Results Summary

Test Specification	Test Case	Temperature and Voltage Conditions	Mode	Pass	Fail	NA	NP	Result
§15.247(a)(1) RSS-247 5.2(1)	Emission Bandwidth	Nominal	BTLE	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Complies Note 3
§15.247(e) RSS-247 5.2(2)	Power Spectral Density	Nominal	BTLE	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Complies Note 3
§15.247(b)(1) RSS-247 5.4(4)	Maximum Conducted Output Power and EIRP	Nominal	BTLE	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Complies Note 2; 3
§15.247(d) RSS-247 5.5	Band edge compliance Unrestricted Band Edges	Nominal	BTLE	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Complies Note 3
§15.247; 15.209; 15.205 RSS-Gen 8.9; 8.10	Band edge compliance Restricted Band Edges	Nominal	BTLE	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Complies Note 3
§15.247(d); §15.209 RSS-Gen 6.13	TX Spurious emissions- Radiated	Nominal	BTLE	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Complies
§15.207(a) RSS Gen 8.8	AC Conducted Emissions	Nominal	BTLE	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Complies

Note 1: NA= Not Applicable; NP= Not Performed.

Note 2: Radiated RF Output Power test intended for power verification on low, mid and high channel of applicable frequency band – see section 7.1. for methods.

Note 3: Leveraged from original certification.

## 6 Measurements

### 6.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus, with 95% confidence interval (in dB delta to result), based on a coverage factor k=1.

#### Radiated measurement

9 kHz to 30MHz	±2.5 dB (Magnetic Loop Antenna)
30 MHz to 1000 MHz	±2.0 dB (Biconilog Antenna)
1 GHz to 40 GHz	±2.3 dB (Horn Antenna)

#### Conducted measurement

150 kHz to 30 MHz	±0.7 dB (LISN)
-------------------	----------------

RF conducted measurement	±0.5 dB
--------------------------	---------

### 6.2 Environmental Conditions during Testing:

The following environmental conditions were maintained during the course of testing:

- Ambient Temperature: 20-25°C
- Relative humidity: 40-60%

### 6.3 Dates of Testing:

11/07/2016 – 2/2/2017




## 7 Measurement Procedures

### 7.1 Radiated Measurement


The radiated measurement is performed according to: ANSI C63.10 (2013)

- The exploratory measurement is accomplished by running a matrix of 16 sweeps over the required frequency range with R&S Test-SW EMC32 for 4 positions of the turntable, two orthogonal positions of the EUT and both antenna polarizations. This procedure exceeds the requirement of the above standards to cover the 3 orthogonal axis of the EUT. A max peak detector is utilized during the exploratory measurement. The Test-SW creates an overall maximum trace for all 12 sweeps and saves the settings for each point of this trace. The maximum trace is part of the test report.
- The 10 highest emissions are selected with an automatic algorithm of EMC32 searching for peaks in the noise floor and ensuring that broadband signals are not selected multiple times.
- The maxima are then put through the final measurement and again maximized in a 90deg range of the turntable, fine search in frequency domain and height scan between 1m and 4m.
- The above procedure is repeated for all possible ways of power supply to EUT and for all supported modulations.
- In case there are no emissions above noise floor level only the maximum trace is reported as described above.
- The results are split up into up to 4 frequency ranges due to antenna bandwidth restrictions. A magnetic loop is used from 9 kHz to 30 MHz, a Biconilog antenna is used from 30 MHz to 1 GHz, and two different horn antennas are used to cover frequencies up to 40 GHz.


Radiated Emissions Test Setup below 30MHz Measurements

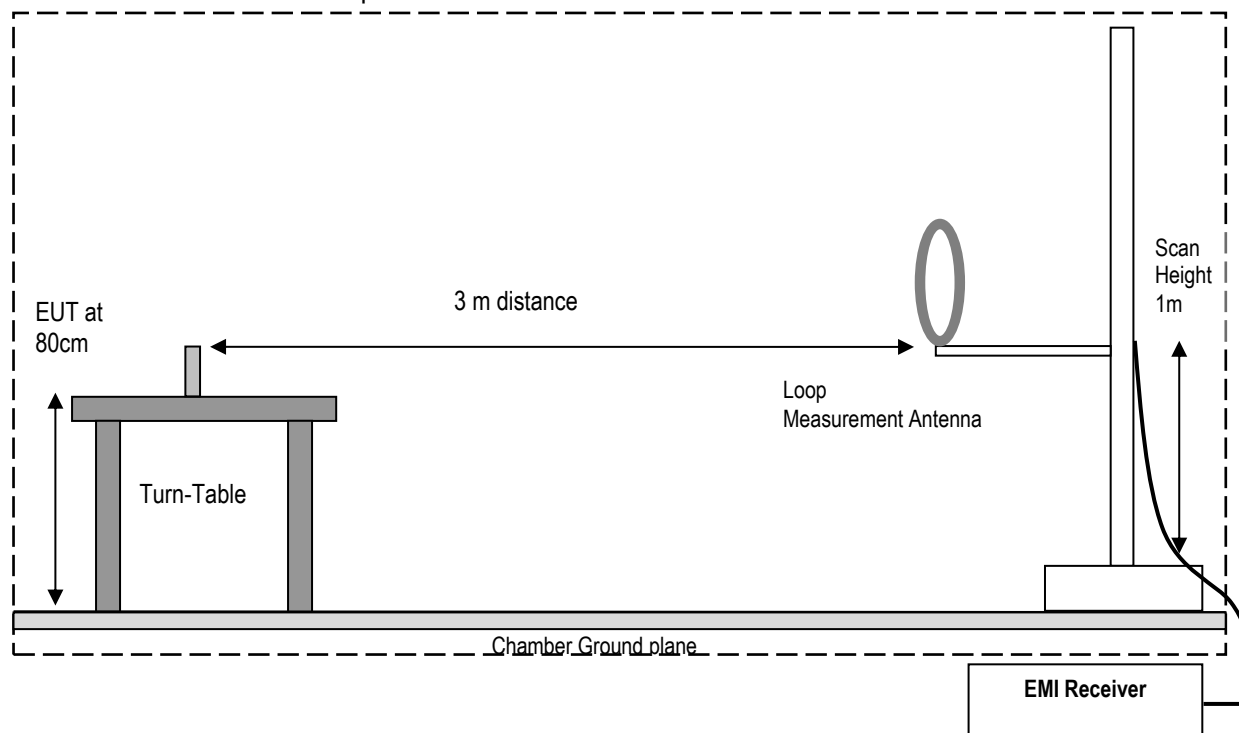

### Radiated Emissions Test Setup 30MHz-1GHz Measurements

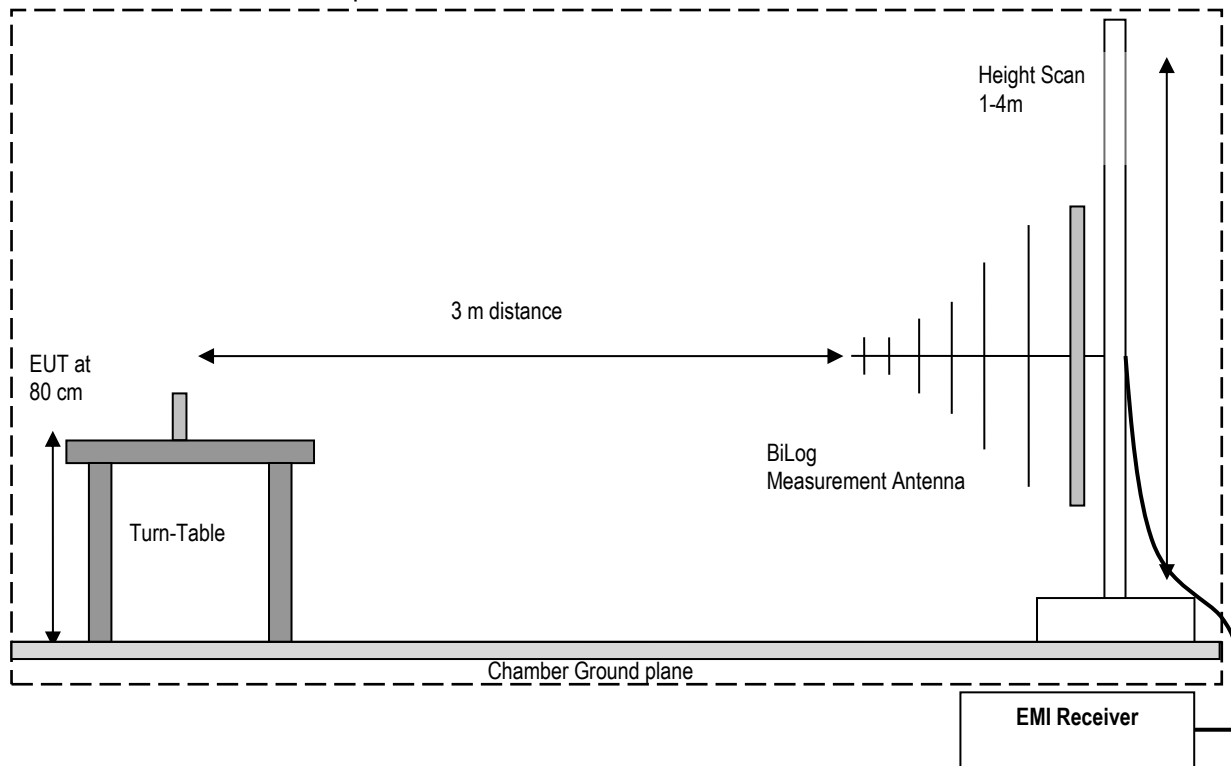

### Radiated Emissions Test Setup above 1GHz Measurements

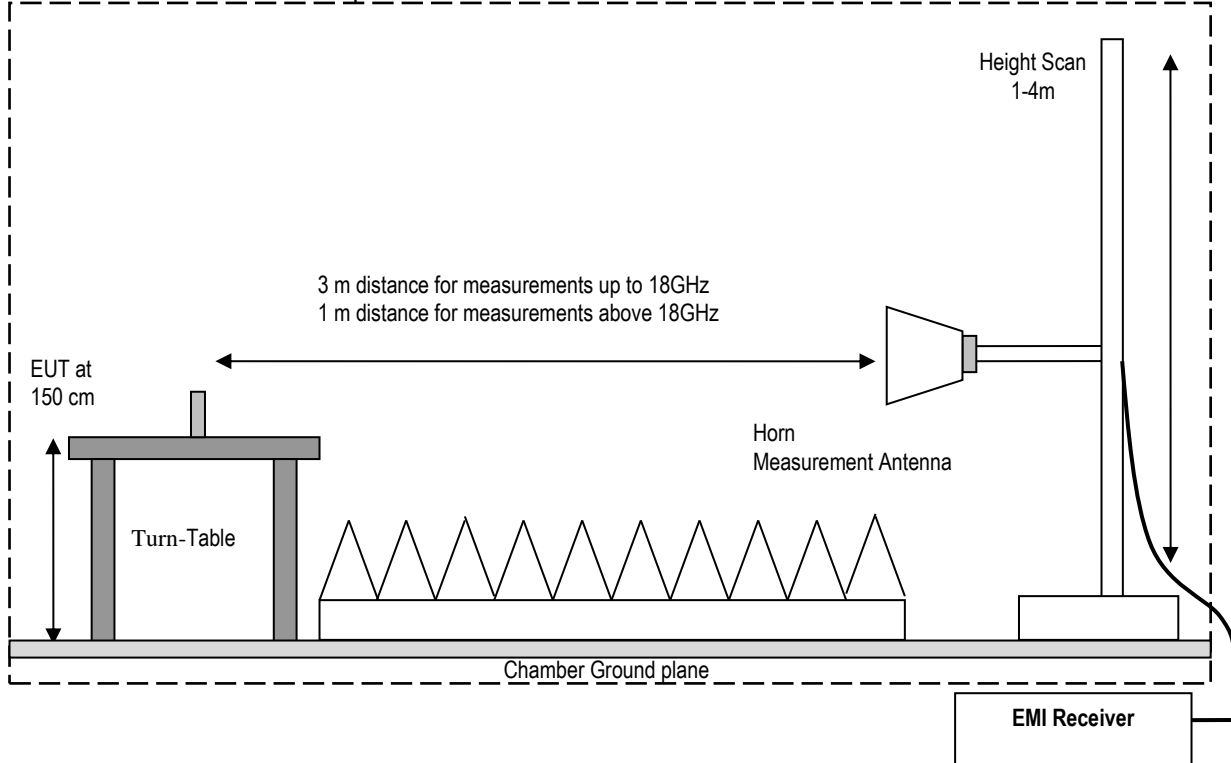

### 7.1.1 Sample Calculations for Field Strength Measurements

Field Strength is calculated from the Spectrum Analyzer/ Receiver readings, taking into account the following parameters:

1. Measured reading in dB $\mu$ V
2. Cable Loss between the receiving antenna and SA in dB and
3. Antenna Factor in dB/m

All radiated measurement plots in this report are taken from a test SW that calculates the Field Strength based on the following equation:

$$FS \text{ (dB}\mu\text{V/m)} = \text{Measured Value on SA (dB}\mu\text{V)} - \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$$

Example:

Frequency (MHz)	Measured SA (dB $\mu$ V)	Cable Loss (dB)	Antenna Factor Correction (dB)	Field Strength Result (dB $\mu$ V/m)
1000	80.5	3.5	14	98.0

### 7.2 Power Line Conducted Measurement Procedure

AC Power Line conducted emissions measurements performed according to: ANSI C63.10 (2013)

## 8 Test Result Data

### 8.1 Output Power Verification

#### 8.1.1 Channel Radiated Measurement According to ANSI C63.10 (2013) for Power Verification

##### Spectrum Analyzer settings:

- $RBW \geq OBW$
- $VBW \geq 3 \times RBW$
- $Span \geq 2 \times RBW$
- Detector = peak
- Trace mode = max hold
- Number of counts = 10000
- Sweep time = auto couple
- Allow trace to fully stabilize. Use the peak marker function to determine the peak amplitude level

#### 8.1.2 Limits:

##### Maximum Peak Output Power:

- FCC §15.247 (b): 1W
- IC RSS-247: 1W

#### 8.1.3 Test conditions and setup:


Ambient Temperature	EUT Set-Up #	EUT operating mode	Power Input	Antenna Gain (dBi)
22.5° C	1	BT LE	120V AC	1.5


#### 8.1.4 Measurement result:


Plot #	Frequency (MHz)	EIRP (dBm)	Equivalent Conducted Output Power (dBm)	Limit (dBm)	Result
1	2402	4.7	3.2	30	Pass
2	2440	5.8	4.3	30	Pass
3	2480	6.6	5.1	30	Pass

Note: Equivalent Conducted Output Power = EIRP - Antenna Gain

### 8.1.5 Measurement Plots:

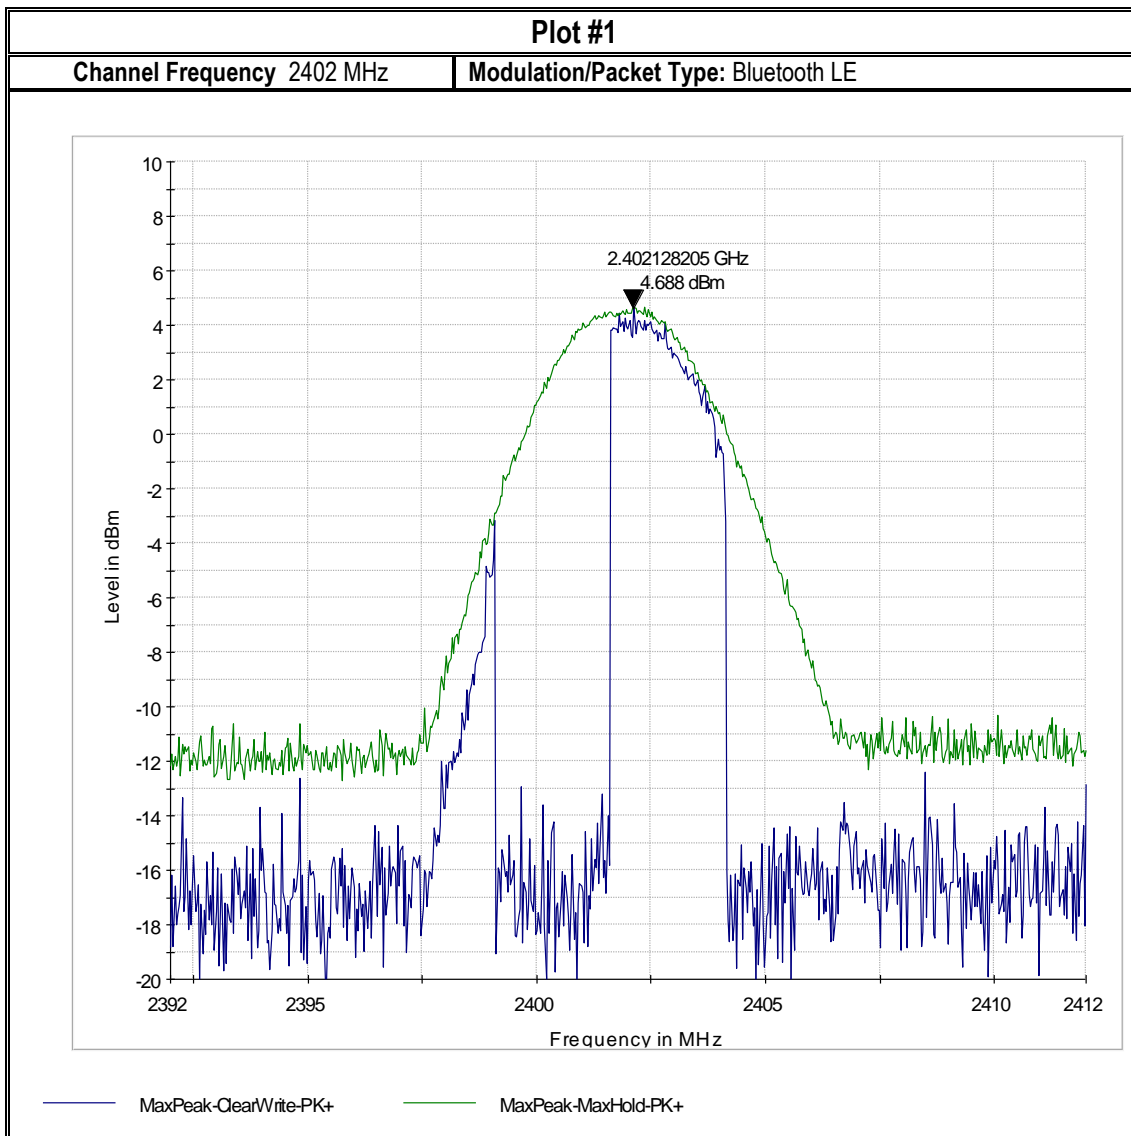

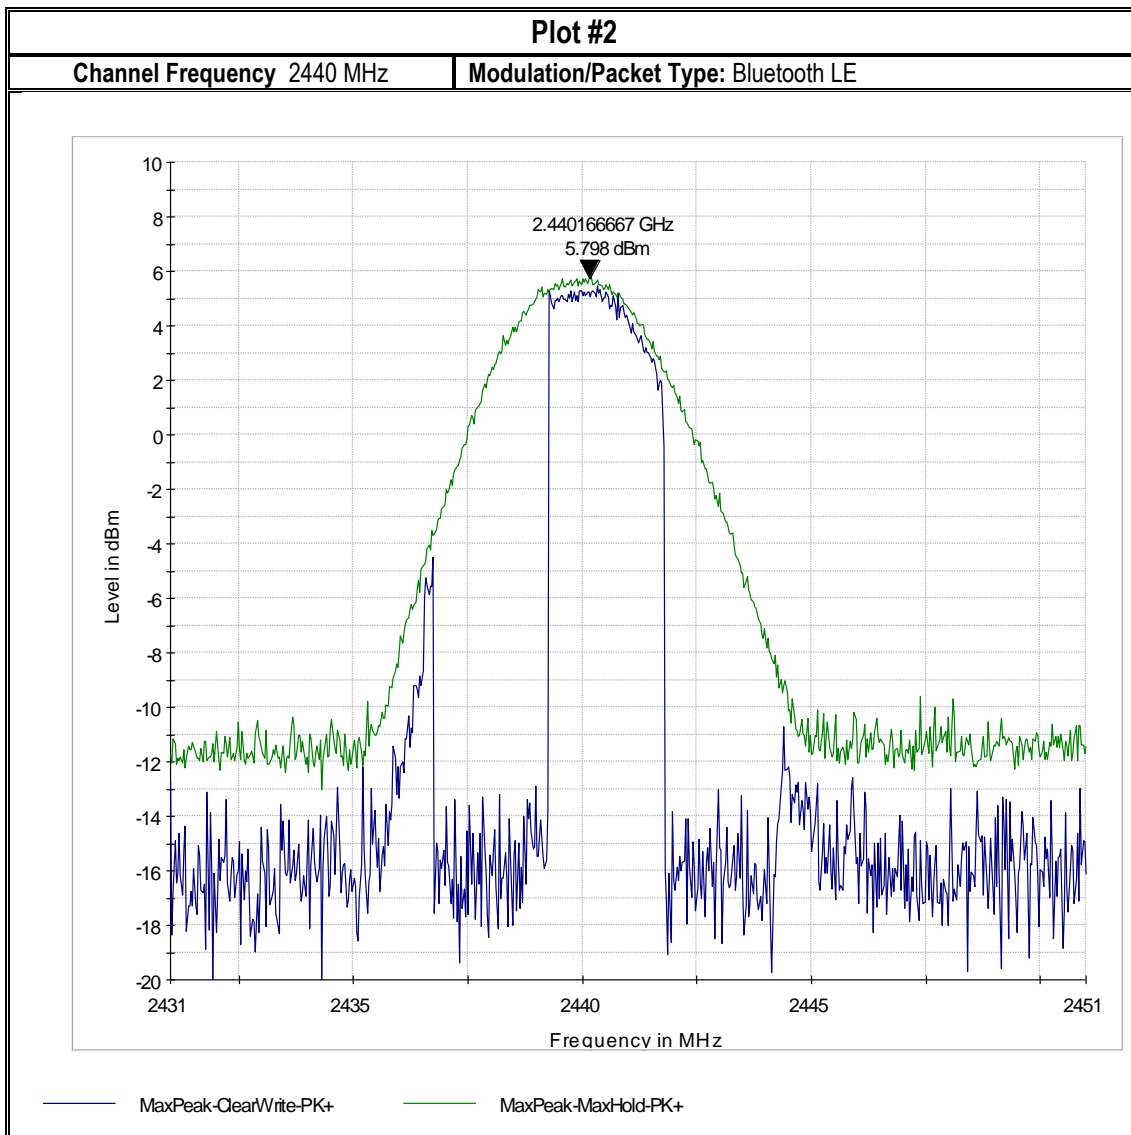

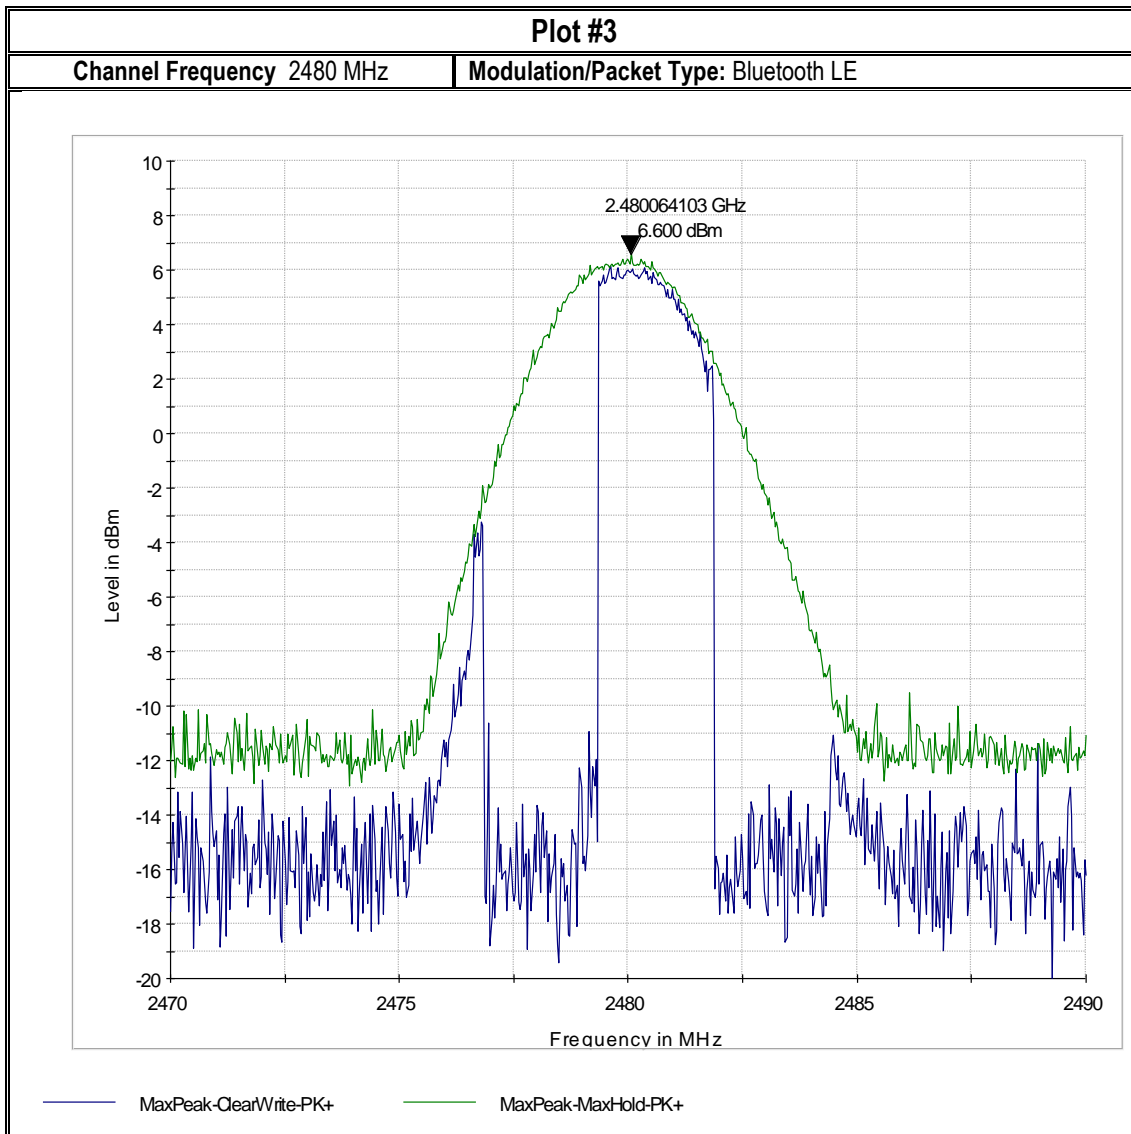

## 8.2 Radiated Transmitter Spurious Emissions

### 8.2.1 Measurement according to ANSI C63.10 (2013)

#### Spectrum Analyzer Settings:

- Frequency = 9 KHz – 30 MHz
- RBW = 9 KHz
- Detector: Peak
  
- Frequency = 30 MHz – 1 GHz
- Detector = Peak / Quasi-Peak
- RBW=120 KHz (<1GHz)
  
- Frequency > 1 GHz
- Detector = Peak / Average
- RBW= 1MHz
  
- Radiated spurious emissions shall be measured for the transmit frequencies, transmit power, and data rate for the lowest, middle and highest channel in each frequency band of operation and for the highest gain antenna for each antenna type, and using the appropriate parameters and test requirements.
- The highest (or worst-case) data rate shall be recorded for each measurement.
- For testing at distance other than the specified in the standard, the limit conversion is calculated by using 40 dB/decade extrapolation factor as follow: Conversion factor (CF) =  $40 \log (D/d) = 40 \log (300\text{m} / 3\text{m}) = 80\text{dB}$

### 8.2.2 Limits:

#### FCC §15.247

- In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).



FCC §15.209 & RSS-Gen 8.9

- Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency of emission (MHz)	Field strength (µV/m)	Measurement Distance (m)	Field strength @ 3m (dBµV/m)
0.009–0.490	2400/F(kHz) / -----	300	-
0.490–1.705	24000/F(kHz) / -----	30	-
1.705–30.0	30 / (29.5)	30	-
30–88	100	3	40dBµV/m
88–216	150	3	43.5 dBµV/m
216–960	200	3	46 dBµV/m
Above 960	500	3	54 dBµV/m

FCC §15.205 & RSS-Gen 8.10

- Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

- Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
  - \*PEAK LIMIT= 74dBµV/m
  - \*AVG. LIMIT= 54dBµV/m

### 8.2.3 Test conditions and setup:

Ambient Temperature	EUT Set-Up #	EUT operating mode	Power Input	Antenna Gain (dBi)
23° C	1	BT LE	120V AC	2.4

### 8.2.4 Measurement result:

Plot #	Channel #	Scan Frequency	Limit	Result
1-3	Low	30 MHz – 18 GHz	See section 8.2.2	Pass
4-8	Mid	9 kHz – 26 GHz	See section 8.2.2	Pass
9-11	High	30 MHz – 18 GHz	See section 8.2.2	Pass


### 8.2.5 Measurement Plots:

Plots reported here represent the worst case emissions for horizontal and vertical antenna polarizations and for three orientations of the EUT. Unless mentioned otherwise, the emissions outside the limit lines in the plots are from the transmit signal.

Plot #1 Radiated Emissions: 30 MHz – 1GHz

Modulation: BT LE

Channel: Low

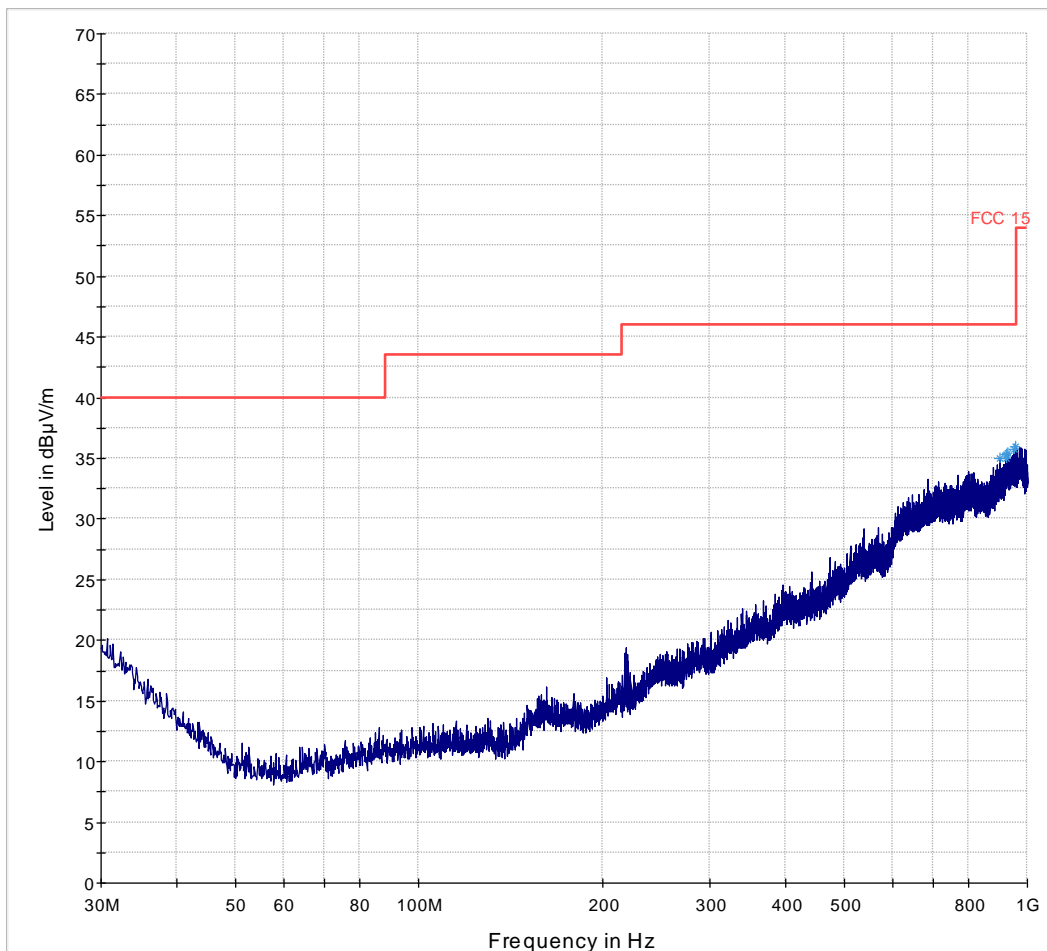


— FCC 15    — Preview Result 1-PK+    \* Data Reduction Result 1 [2]-PK+

Plot # 2 Radiated Emissions: 1-3 GHz

Modulation: BT LE

Channel: Low

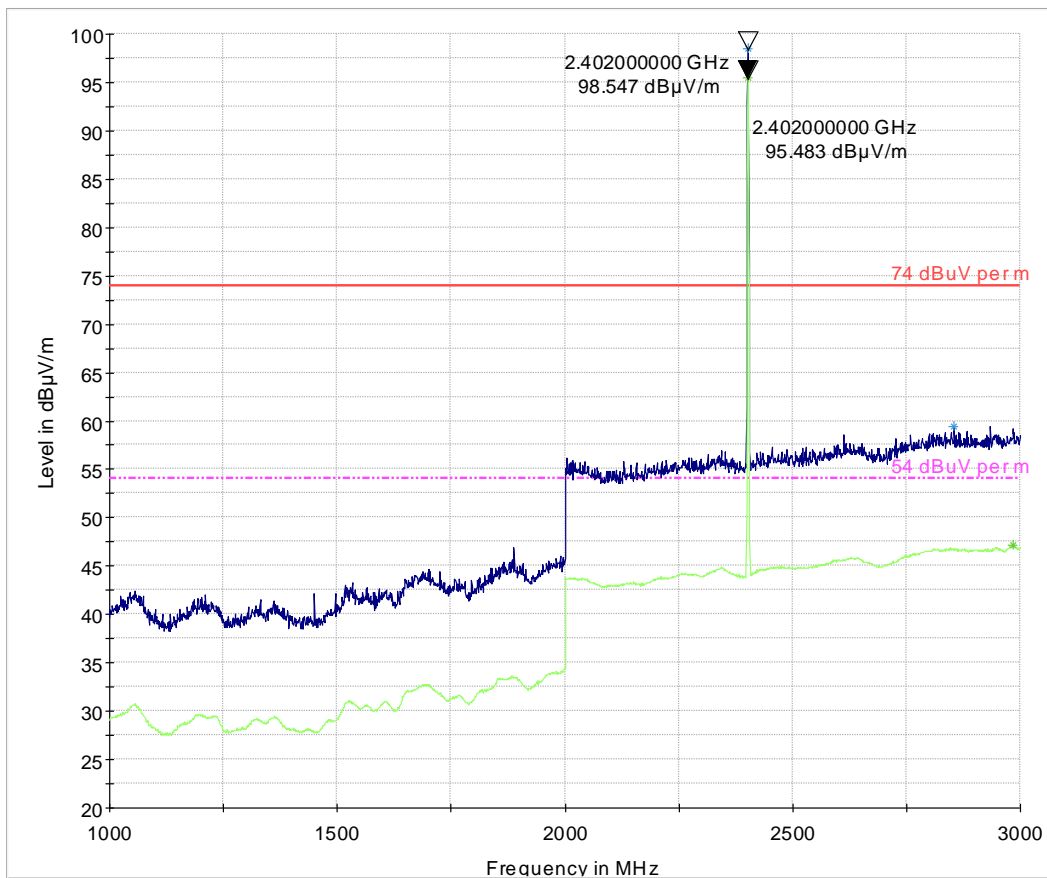


- 74 dBuV per m
- 54 dBuV per m
- Preview Result 1-PK+
- Preview Result 2-RMS
- \* Data Reduction Result 1 [4]-PK+
- \* Data Reduction Result 2 [4]-RMS

Note: Signal over the limit is the fundamental.

Plot # 3 Radiated Emissions: 3-18 GHz

Modulation: BT LE

Channel: Low

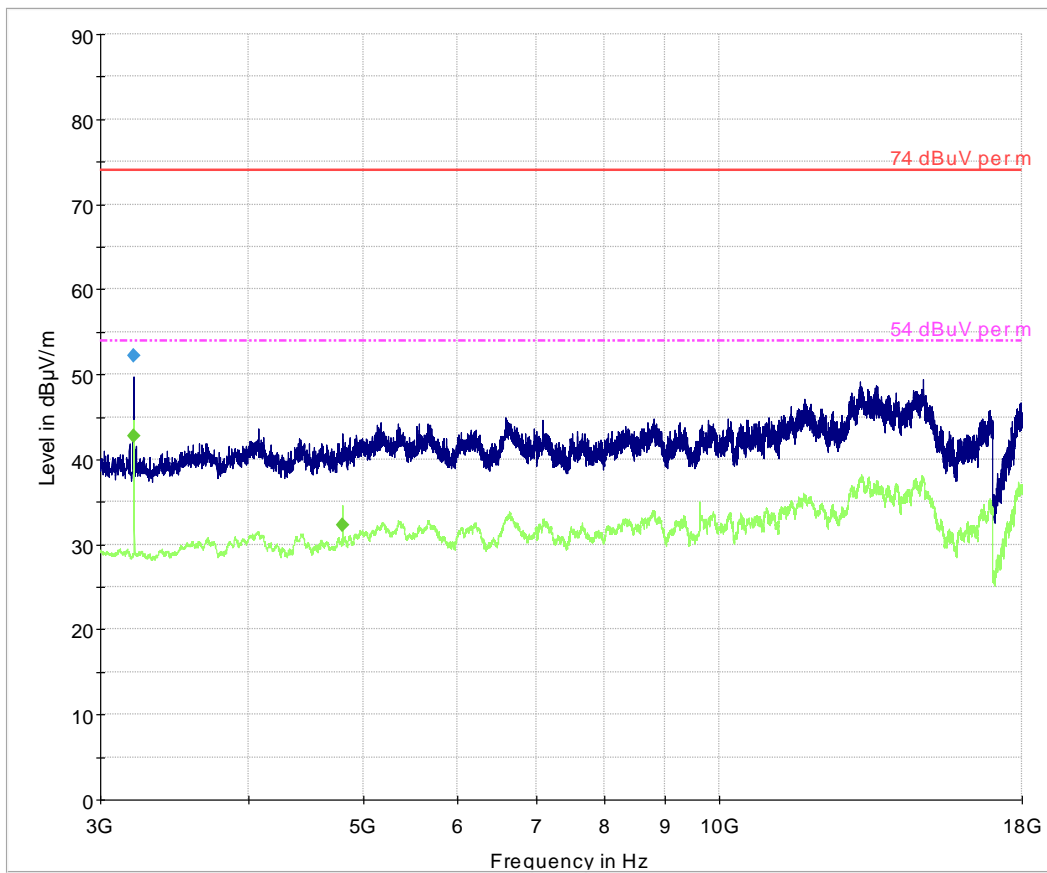


- 74 dBuV per m
- 54 dBuV per m
- Preview Result 1-PK+
- Preview Result 2-RMS
- Final Result 1-PK+
- Final Result 2-AVG

Plot # 4 Radiated Emissions: 9 KHz - 30 MHz

Modulation: BT LE

Channel: Mid

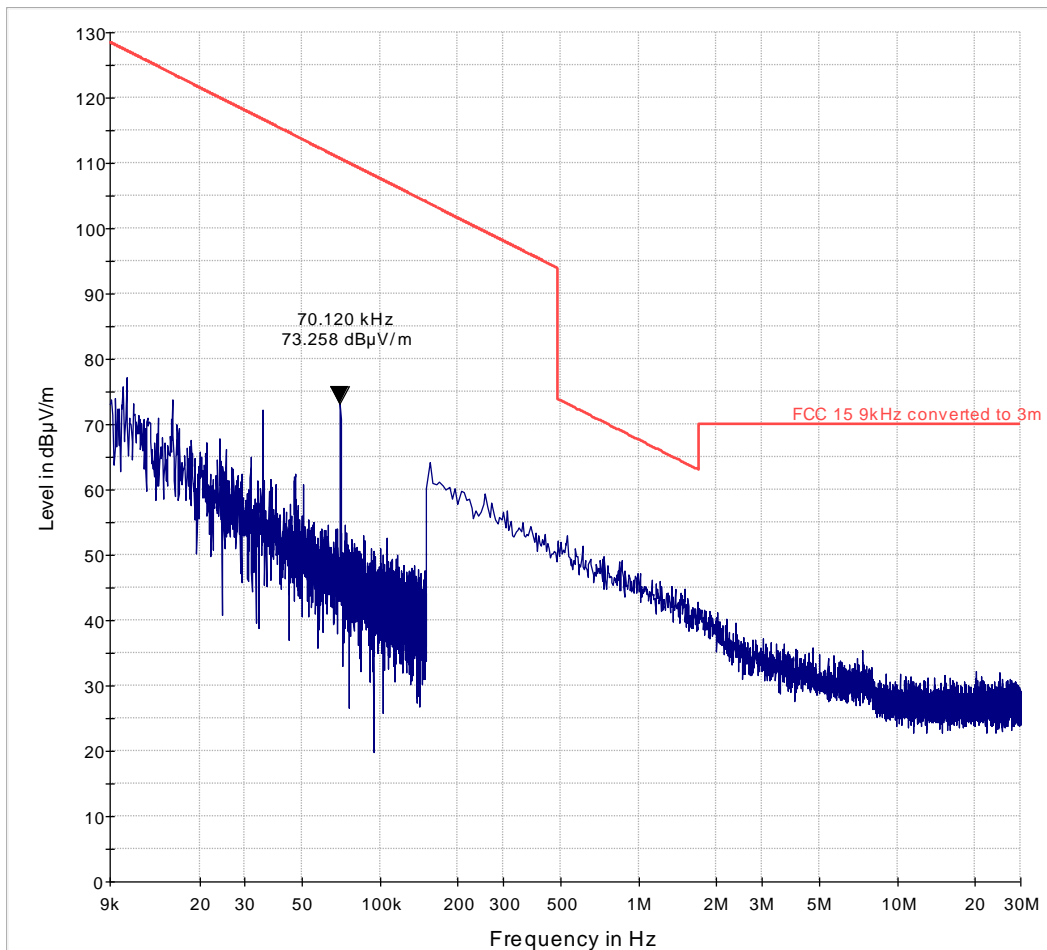


FCC 15 9kHz converted to 3m      Preview Result 1-PK+

Plot #5 Radiated Emissions: 30 MHz – 1GHz

Modulation: BT LE

Channel: Mid

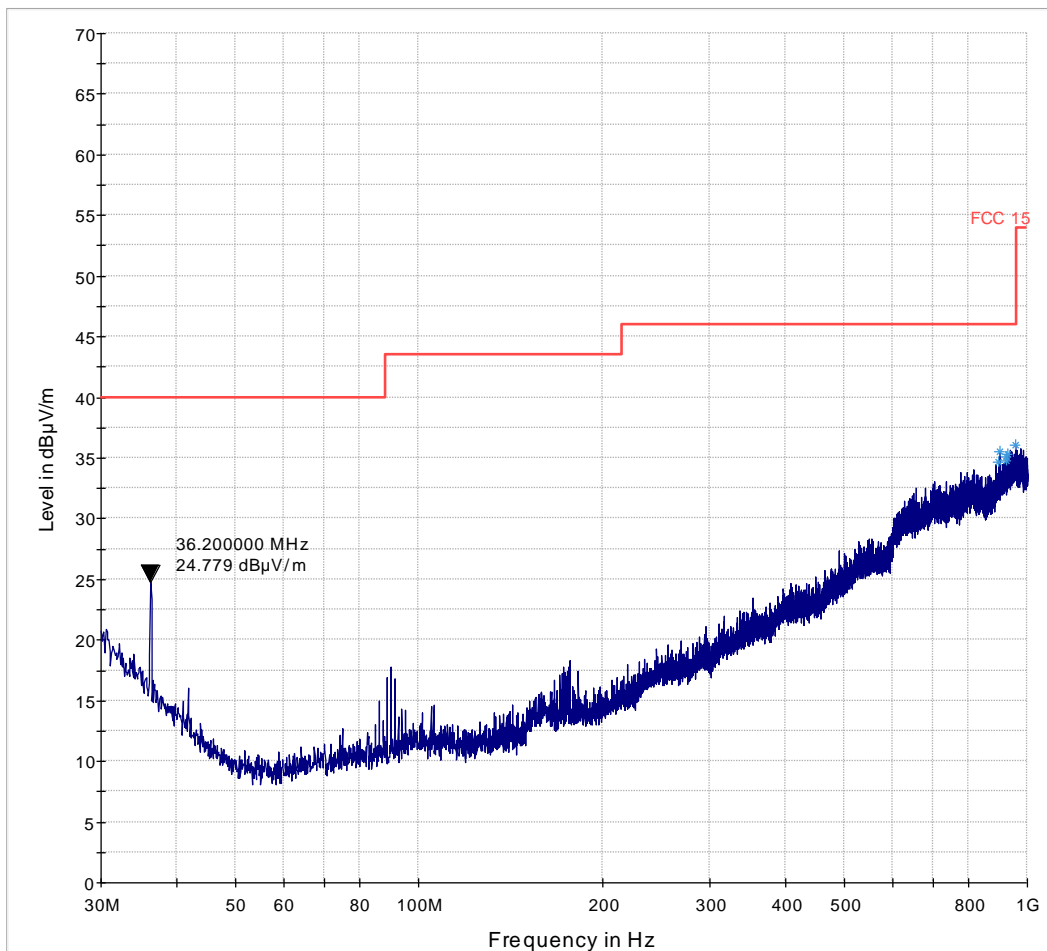


— FCC 15    — Preview Result 1-PK+    \* Data Reduction Result 1 [2]-PK+

Plot #6 Radiated Emissions: 1-3 GHz

Modulation: BT LE

Channel: Mid

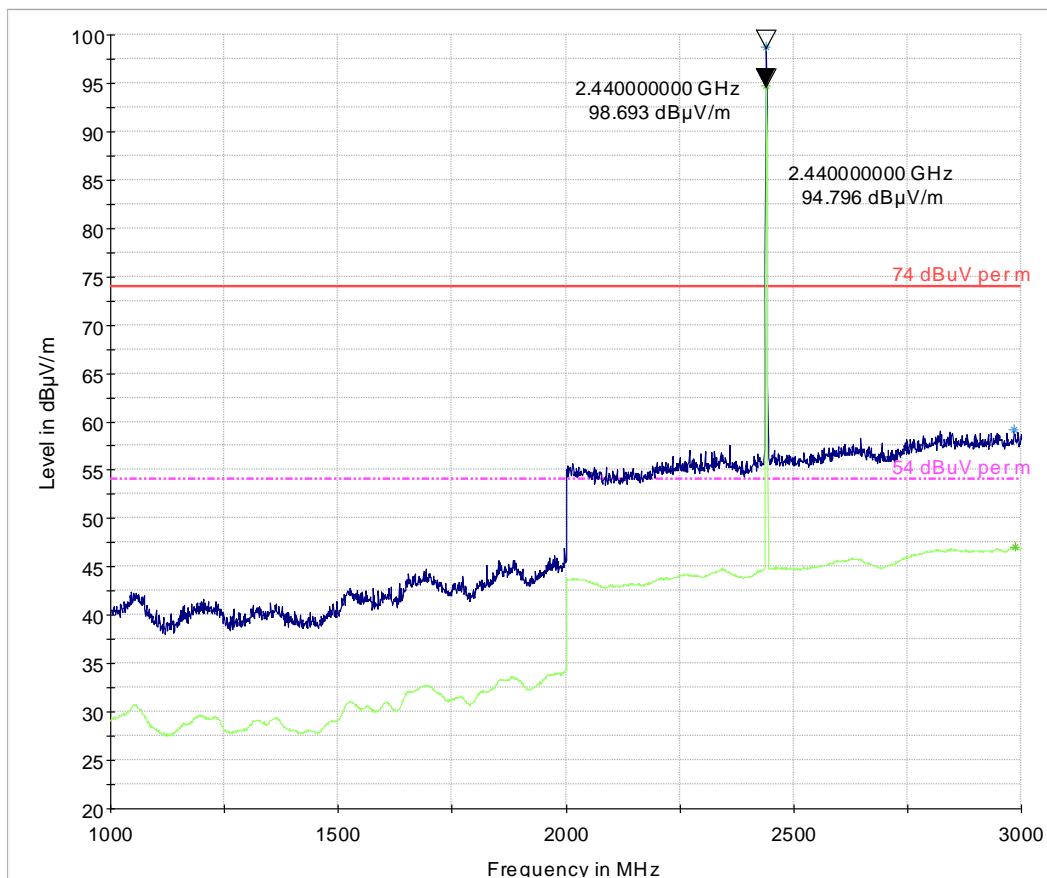

- 74 dBuV per m
- Preview Result 1-PK+
- Data Reduction Result 1 [4]-PK+
- 54 dBuV per m
- Preview Result 2-RMS
- Data Reduction Result 2 [4]-RMS


Note: Signal over the limit is the fundamental.



Plot #7 Radiated Emissions: 3-18 GHz

Modulation: BT LE

Channel: Mid

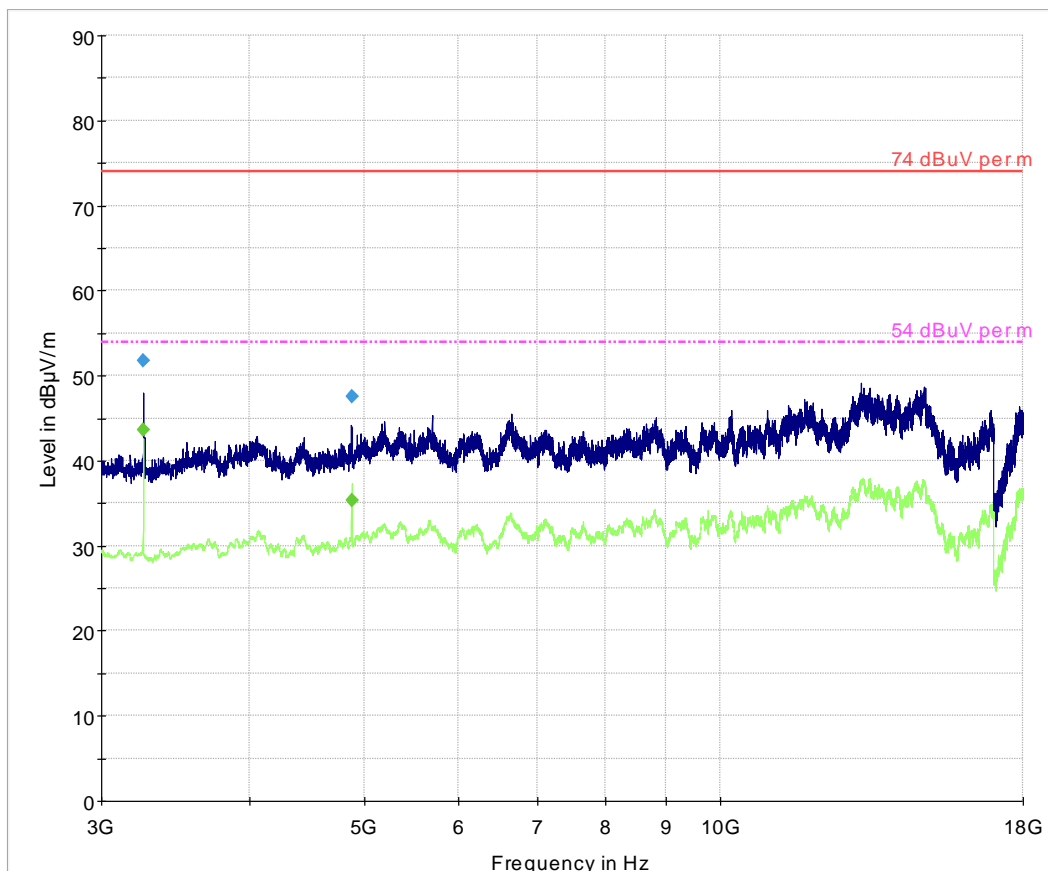


74 dBuV per m	54 dBuV per m	Preview Result 1-PK+
Preview Result 2-RMS	Final Result 1-PK+	Final Result 2-AVG

Plot #8 Radiated Emissions: 18-26 GHz

Modulation: BT LE

Channel: Mid

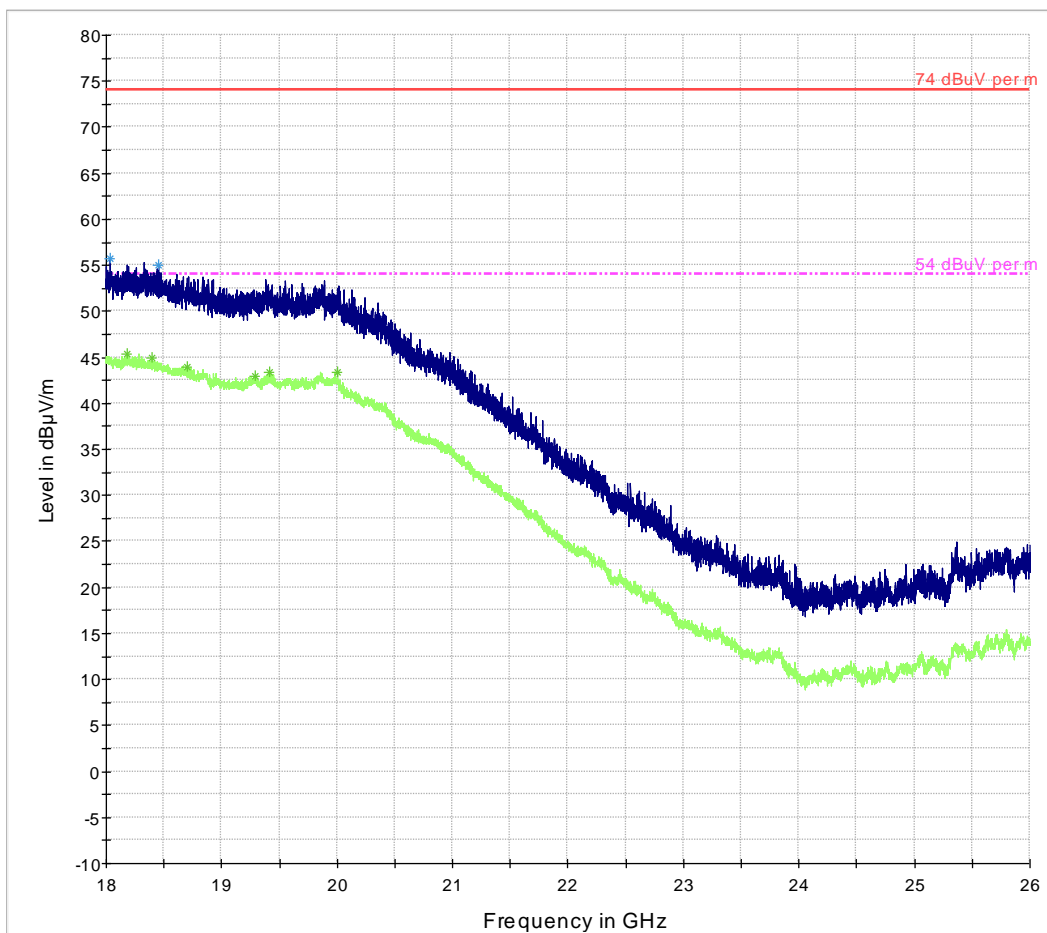


- 74 dBuV per m
- 54 dBuV per m
- Preview Result 1-PK+
- Preview Result 2-RMS
- Data Reduction Result 1 [6]-PK+
- Data Reduction Result 2 [6]-RMS

Plot #9 Radiated Emissions: 30 MHz – 1GHz

Modulation: BT LE

Channel: High

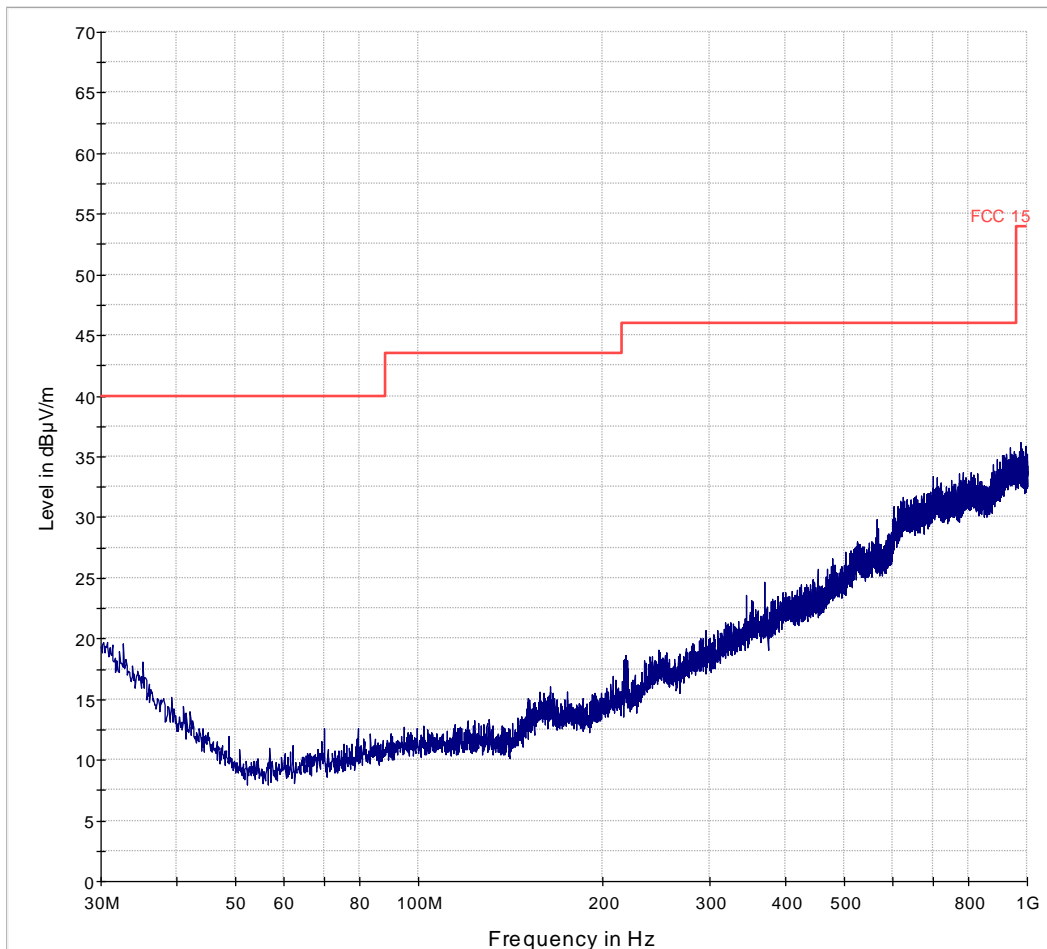


FCC 15      Preview Result 1-PK+

Plot # 10 Radiated Emissions: 1-3 GHz and Restricted Bands

Modulation: BT LE

Channel: High

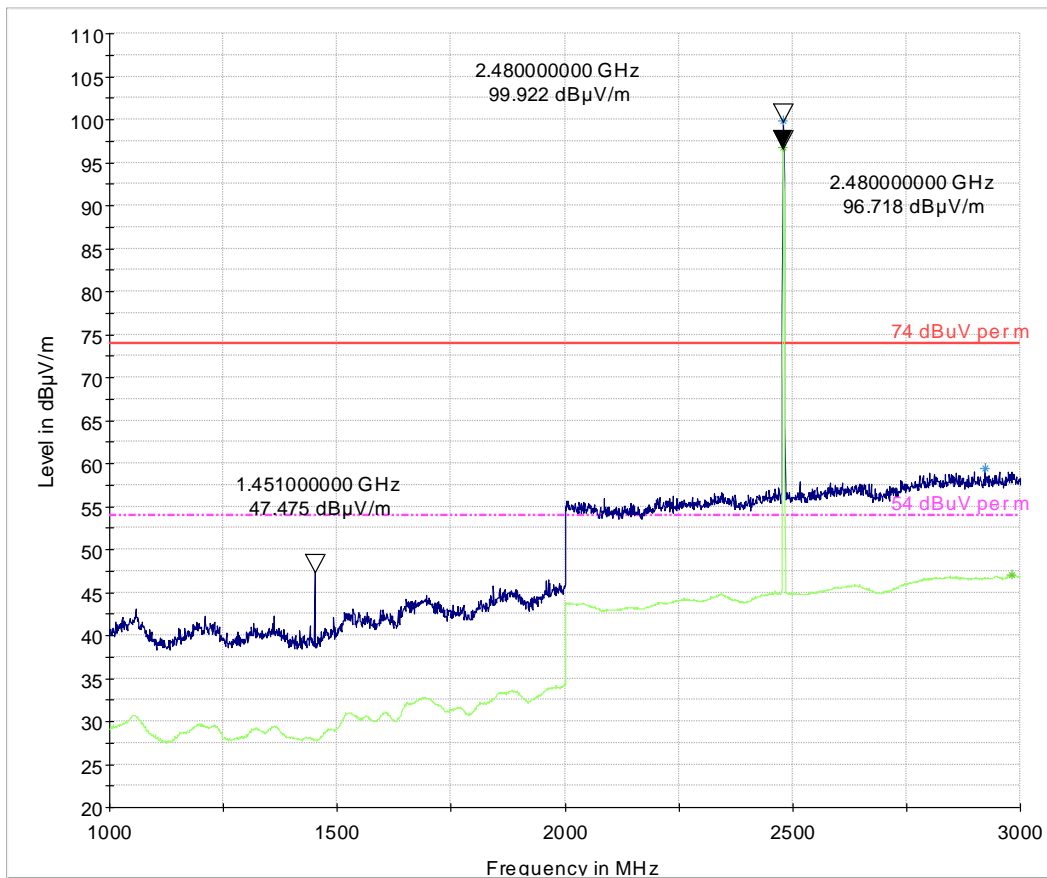


- 74 dBuV per m
- Preview Result 1-PK+
- \* Data Reduction Result 1 [4]-PK+
- - - 54 dBuV per m
- Preview Result 2-RMS
- \* Data Reduction Result 2 [4]-RMS

Note: Signal over the limit is the fundamental.

Plot #11 Radiated Emissions: 3-18 GHz

Modulation: BT LE

Channel: High

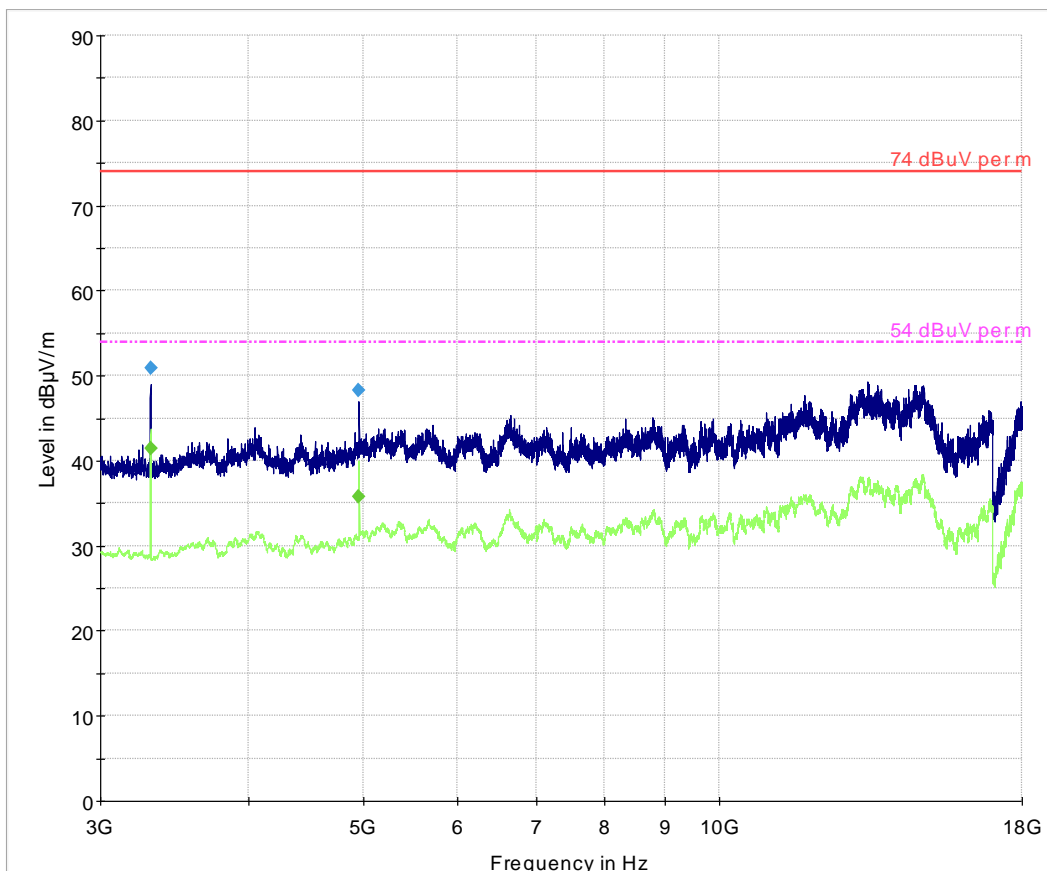

74 dBuV per m	54 dBuV per m	Preview Result 1-PK+
Preview Result 2-RMS	Final Result 1-PK+	Final Result 2-AVG

### 8.3 AC Power Line Conducted Emissions

#### 8.3.1 Measurement according to ANSI C63.10 (2013)

##### Spectrum Analyzer Settings:

- RBW = 9 KHz (CISPR Bandwidth)
- Detector: Peak / Average for Pre-scan
- Quasi-Peak/Average for Final Measurements

#### 8.3.2 Limits:

##### FCC §15.207(a) & RSS-Gen 8.8

- Except as shown in paragraphs (b) and (c) of this section of the CFR, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table (1), as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50

\*Decreases with the logarithm of the frequency.

#### 8.3.3 Test conditions and setup:

Ambient Temperature (C)	EUT Set-Up #	EUT operating mode	Power line (L1, L2, L3, N)	Power Input
22	1	BT LE	Line & Neutral	110V / 60Hz

#### 8.3.4 Measurement Result:

Plot #	Port	EUT Set-Up #	EUT operating mode	Scan Frequency	Limit	Result
1	AC Mains	1	BT LE	150 kHz – 30 MHz	See section 8.3.2	Pass


#### 8.3.5 Measurement Plots:

Plot # 1

Quasipeak Measurement Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.154000	46.3	500.0	9.000	GN	L1	8.5	19.5	65.8
0.462000	39.4	500.0	9.000	GN	L1	2.3	17.3	56.7
0.486000	40.5	500.0	9.000	GN	L1	2.1	15.7	56.2
0.510000	41.7	500.0	9.000	GN	L1	2.0	14.3	56.0
0.534000	35.0	500.0	9.000	GN	N	2.0	21.0	56.0
0.554000	43.2	500.0	9.000	GN	N	1.9	12.8	56.0

*Disclaimer: Any measurement data within 2dB from the limit line is conditional PASS/FAIL due to measurement uncertainty considerations.*

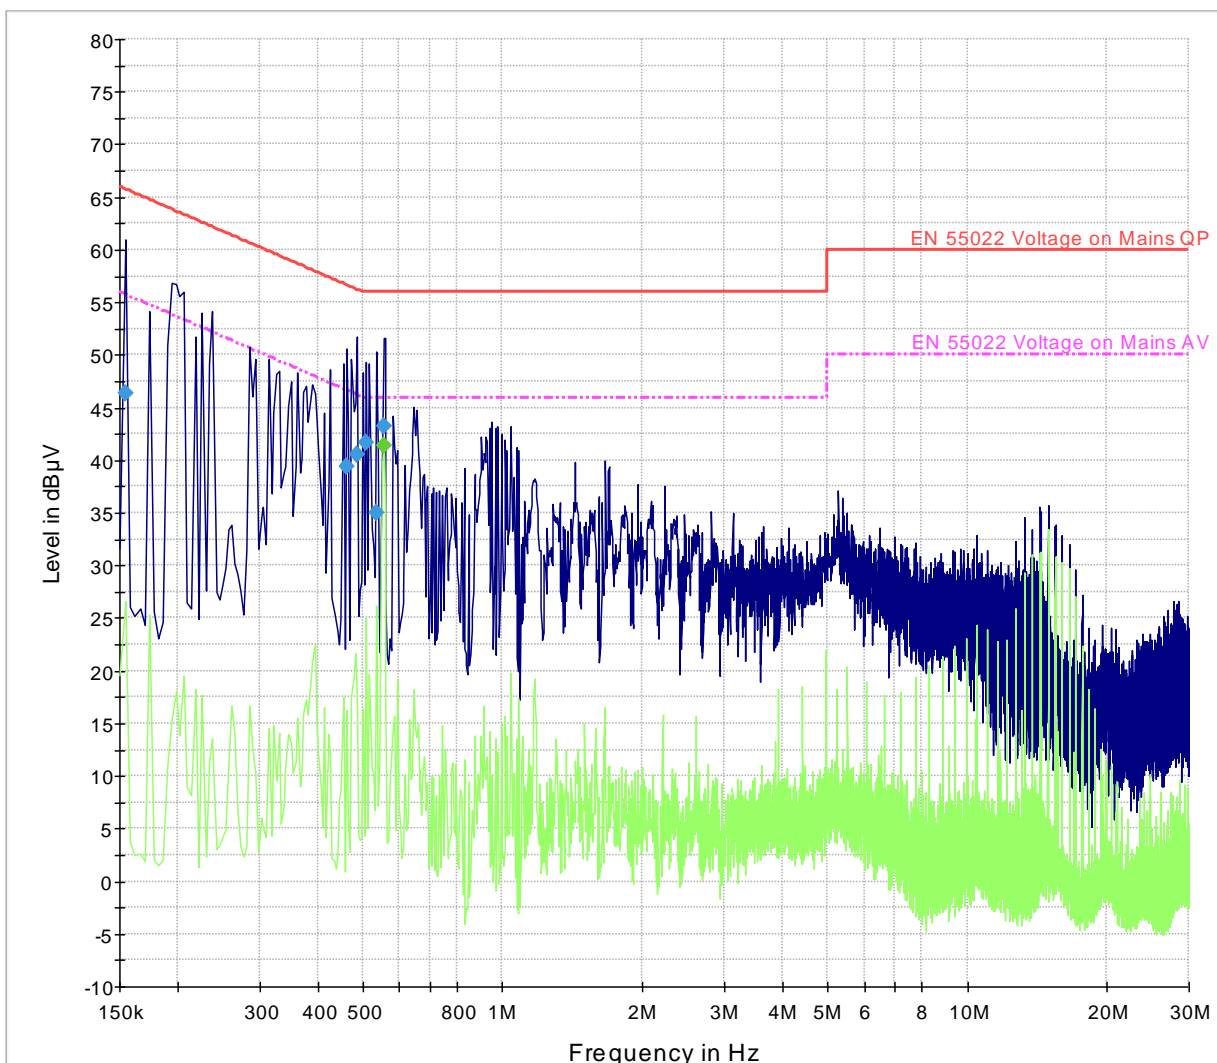

— EN 55022 Voltage on Mains QP    
 - - - EN 55022 Voltage on Mains AV    
 — Preview Result 1-PK+    
 ◆ Final Result 1-QPK    
 ◆ Final Result 2-AVG

**9 Test setup photos**

Setup photos are included in supporting file name: "EMC-PHIL4-028-16001-15-247-Setup-Photos-Rev1.pdf"

**10 Test Equipment And Ancillaries Used For Testing**

Item Name	Equipment Type	Manufacturer	Model	Serial #	Calibration Cycle	Last Calibration Date
Antenna Biconilog 3142E	Biconilog Antenna	EMCO	3142E	166067	3 years	6/14/2014
Antenna Loop 6512	Loop Antenna	ETS Lindgren	6512	49838	3 years	3/13/2014
Antenna Horn 3115 SN 35111	Horn Antenna	EMCO	3115	35111	3 years	7/24/2015
Antenna Horn 3116	Horn Antenna	ETS Lindgren	3116	70497	3 years	7/22/2015
Digital Barometer	Compact Digital Barometer	Control Company	35519-055	91119547	2 Years	4/7/2015
FSU26	Spectrum Analyzer	R&S	FSU26	200302	3 years	7/4/2015
Thermometer Humidity TM320	Thermometer Humidity	Dickson	AY1072	0528	1 Year	11/04/2016

Equipment used meets the measurement uncertainty requirements as required per applicable standards for 95% confidence levels.

Calibration due dates, unless defined specifically, falls on the last day of the month. Items indicated "N/A" for cal status either do not specifically require calibration or is internally characterized before use.



Test Report #: EMC-PHIL4-028-16001-15-247-DTS-Rev1

FCC-ID TH01116426



Date of Report 2017-04-04

IC ID: 3234B-1116426

---

## 11 Revision History

<b>Date</b>	<b>Report Name</b>	<b>Changes to report</b>	<b>Report prepared by</b>
2017-04-03	EMC-PHIL4-028-16001-15-247-DTS	Initial Version	James Donnellan
2017-04-04	EMC-PHIL4-028-16001-15-247-DTS-Rev1	Updated Company Name	James Donnellan