

# FCC RADIO TEST REPORT

according to

47 CFR FCC Part 15 Subpart E § 15.407

**Equipment** : **Wireless Access Point**  
**Model No.** : **BSAP-1800**  
**Brand Name** : **bluesocket**  
**Filing Type** : **Addational**  
**Applicant** : **Bluesocket, Incorporated**  
10 North Ave Burlington Massachusetts 01803  
United States  
**FCC ID** : **TIH-BSAP1800V2**  
**Manufacturer** : **DONG GUAN G-COM COMPUTER CO., LTD**  
1<sup>st</sup> Row Yin Shan Rd., Yin Hwu Industrial  
Area, Qingxi Town, DongGuan City, Guang  
Dong, China  
**Received Date** : Jul. 09, 2009  
**Final Test Date** : Mar. 02, 2010

## Statement

**Test result included is only for the 802.11a/n (5150~5250MHz) PIFA Antenna of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart E**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



**SPORTON International Inc.**

6F, No. 106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

**Table of Contents**

**1 SUMMARY OF THE TEST RESULT ..... 4**

**2 GENERAL INFORMATION..... 5**

2.1 Product Details ..... 5

2.2 Table for Filed Antenna ..... 5

2.3 Table for Carrier Frequencies ..... 6

2.4 Table for Test Modes ..... 7

2.5 Table for Testing Locations ..... 7

2.6 Table for Supporting Units..... 8

2.7 Table for Parameters of Test Software Setting ..... 8

2.8 EUT Operation during Test ..... 9

2.9 Test Configuration ..... 9

**3 TEST RESULT ..... 11**

3.1 AC Power Line Conducted Emissions Measurement..... 11

3.2 99% Occupied Bandwidth Measurement ..... 19

3.3 Maximum Conducted Output Power Measurement ..... 26

3.4 Power Spectral Density Measurement ..... 30

3.5 Peak Excursion Measurement ..... 37

3.6 Radiated Emissions Measurement..... 44

3.7 Band Edge and Fundamental Emissions Measurement ..... 68

3.8 Frequency Stability Measurement..... 72

3.9 Antenna Requirements..... 75

**4 LIST OF MEASURING EQUIPMENTS ..... 76**

**5 TEST LOCATION..... 78**

**6 TAF CERTIFICATE OF ACCREDITATION ..... 79**

**APPENDIX A. MAXIMUM PERMISSIBLE EXPOSURE..... A1 ~ A3**

**APPENDIX B. TEST PHOTOS ..... B1 ~ B10**

**APPENDIX C. PHOTOGRAPHS OF EUT ..... C1 ~ C24**




# CERTIFICATE OF COMPLIANCE

according to

47 CFR FCC Part 15 Subpart E § 15.407

Equipment : Wireless Access Point  
Model No. : BSAP-1800  
Brand Name : bluesocket  
Applicant : Bluesocket, Incorporated  
10 North Ave Burlington Massachusetts 01803  
United States

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jul. 09, 2009 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Wayne Hsu

**SPORTON International Inc.**

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

**1 SUMMARY OF THE TEST RESULT**

<b>Applied Standard: 47 CFR FCC Part 15 Subpart E</b>				
<b>Part</b>	<b>Rule Section</b>	<b>Description of Test</b>	<b>Result</b>	<b>Under Limit</b>
3.1	15.207	AC Power Line Conducted Emissions	Complies	1.62 dB
3.2	15.407(a)	26dB Spectrum Bandwidth	Complies	-
3.3	15.407(a)	Maximum Conducted Output Power	Complies	3.86dB
3.4	15.407(a)	Power Spectral Density	Complies	0.18 dB
3.5	15.407(a)	Peak Excursion	Complies	1.96 dB
3.6	15.407(b)	Radiated Emissions	Complies	1.02 dB
3.7	15.407(b)	Band Edge Emissions	Complies	1.32 dB
3.8	15.407(g)	Frequency Stability	Complies	-
3.9	15.203	Antenna Requirements	Complies	-

<b>Test Items</b>	<b>Uncertainty</b>	<b>Remark</b>
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Conducted Output Power	±0.5dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
Peak Excursion	±0.5dB	Confidence levels of 95%
26dB Spectrum Bandwidth / Frequency Stability	±8.5×10 <sup>-8</sup>	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

## 2 GENERAL INFORMATION

### 2.1 Product Details

Only the radio detail of IEEE 802.11a/n of PIFA Antenna is shown in the table below. For more detailed features description, please refer to the manufacturer’s specifications or user’s manual.

Items	Description
Modulation	See the below table for IEEE 802.11n
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	See the below table for IEEE 802.11n
Frequency Range	5150~5250 MHz
Channel Band Width (99%)	2TX-11a Band 1: 17.31 MHz 2TX-11n Band 1 MCS 8 (20MHz): 17.95 MHz ; MCS 8 (40MHz): 36.54 MHz
Conducted Output Power	2TX-11a Band 1: 12.21 dBm 2TX-11n Band 1 MCS 8 (20MHz): 12.47 dBm ; MCS 8 (40MHz): 13.14 dBm

### 2.2 Table for Filed Antenna

#### Antenna & Bandwidth- PIFA Antenna (TFF-Z016MPXX-361)

Antenna Mode	Single Chain		Two Chain	
	20 MHz	40 MHz	20 MHz	40 MHz
Bandwidth Mode				
802.11b	X	X	V	X
802.11g	X	X	V	X
802.11n(2.4GHz)	X	X	V	V
802.11a (5150~5250MHz)	X	X	V	X
802.11a (5725~5850MHz)	X	X	V	X
802.11n (5150~5250MHz)	X	X	V	V
802.11n (5725~5850MHz)	X	X	V	V

Ant.	Antenna Type	Model Name	Product description	Gain (dBi)	Tx/Rx mode	REMARK
4	PIFA Antenna	TFF-Z016MPXX-361	Integrated PIFA Antenna	4.98/5.08	2T3R concurrent	Main Ant. for test

#### PIFA Antenna (TFF-Z016MPXX-361)

Ant . Port	Antenna Type	Connector	Gain (dBi)		Remark
			2.4G	5G	
A	PIFA Antenna	U.FL	4.98	5.08	TX / RX
B	PIFA Antenna	U.FL	4.98	5.08	TX / RX
C	PIFA Antenna	U.FL	4.98	5.08	RX
D	PIFA Antenna	U.FL	4.98	5.08	TX / RX
E	PIFA Antenna	U.FL	4.98	5.08	TX / RX
F	PIFA Antenna	U.FL	4.98	5.08	RX

**Antenna note:** This antenna system has six antenna elements in this EUT. (3 antenna elements for 2.4GHz band and 3 antenna elements for 5GHz band) Three antenna elements used in the same band have 2T3R concurrent spatial multiplexing MIMO configuration and two of them for signal transmitting/receiving and the other antenna for signal receiving only whenever in 2.4GHz or 5GHz.

IEEE 802.11n Modulation Scheme

MCS Index	Nss	Modulation	R	NBPS	NCBPS		NDBPS		Data rate(Mbps)	
									800nsGI	
					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0
6	1	64-QAM	3/4	6	312	648	234	486	58.5	121.5
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0
8	2	BPSK	1/2	1	104	216	52	108	13.0	27.0
9	2	QPSK	1/2	2	208	432	104	216	26.0	54.0
10	2	QPSK	3/4	2	208	432	156	324	39.0	81.0
11	2	16-QAM	1/2	4	416	864	208	432	52.0	108.0
12	2	16-QAM	3/4	4	416	864	312	648	78.0	162.0
13	2	64-QAM	2/3	6	624	1296	416	864	104.0	216.0
14	2	64-QAM	3/4	6	624	1296	468	972	117.0	243.0
15	2	64-QAM	5/6	6	624	1296	520	1080	130.0	270.0

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPS	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	guard interval

2.3 Table for Carrier Frequencies

Frequency Allocation

For 802.11a, 802.11n (20MHz): Use channel 36, 40, 44, 48.

For 802.11n (40MHz): Use channel 38, 46.

Frequency Band	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz
	38	5190 MHz
	40	5200 MHz
	44	5220 MHz
	46	5230 MHz
	48	5240 MHz

**2.4 Table for Test Modes**

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible Configuration for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Conducted Emission	See the note	Auto	-	-
Max. Conducted Output Power	11a Band 1/BPSK	6Mbps	36/40/48	A/B
	11n Band 1/BPSK MCS 8 (20MHz)	13Mbps	36/40/48	A+B
	11n Band 1/BPSK MCS 8 (40MHz)	27Mbps	38/46	
26dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement Power Spectral Density Peak Excursion	11a Band 1/BPSK	6Mbps	36/40/48	A+B
	11n Band 1/BPSK MCS 8 (20MHz)	13Mbps	36/40/48	
	11n Band 1/BPSK MCS 8 (40MHz)	27Mbps	38/46	
Radiated Emission Below 1GHz	See the note	Auto	-	-
Radiated Emission Above 1GHz Band Edge Emission	11a Band 1/BPSK	6Mbps	36/40/48	A+B
	11n Band 1/BPSK MCS 8 (20MHz)	13Mbps	36/40/48	
	11n Band 1/BPSK MCS 8 (40MHz)	27Mbps	38/46	
Frequency Stability	11a Band 1/BPSK	6Mbps	40	
	11n Band 1/BPSK	6.5Mbps	40	

**Note: The following modes were tested:**

**Conducted Emissions**

Adapter Mode (DSA-15P-12 US)

Adapter Mode (DSA-20D-12 2)

POE Mode (Power Supply: POE20U-560(G) -R)

**In the Radiated (Below 1GHz) because POE Mode is performed the worst test result; it was reported as final data (30MHz~1GHz Chapter 3.6.8).**

**2.5 Table for Testing Locations**

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
CO04-HY	Conduction	Hwa Ya	643075	IC 4086B-1
TH01-HY	OVEN Room	Hwa Ya	-	-
OS04-LK	OATS	Lin Kou	93596	IC 4086C-1
03CH02-HY	SAC	Hwa Ya	643075	IC 4086B-1

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).



**2.6 Table for Supporting Units**

Support Unit	Brand	Model	FCC ID
P.C. (Remote Workstation)	COMPAQ	Evo D380mx	DoC
Notebook (Remote Workstation)	DELL	D400	DoC
Monitor (Remote Workstation)	COMPAQ	S510	DoC
Keyboard (PS2) (Remote Workstation)	COMPAQ	6511-VA	DoC
Mouse (PS2) (Remote Workstation)	COMPAQ	M-S69	JNZ211443
Switching Power Supply	PHIHONG	POE20U-560(G) -R	-

**2.7 Table for Parameters of Test Software Setting**

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

**For Two Chain:**

**Power Parameters of IEEE 802.11a Ant. A + Ant. B**

Test Software Version	ART 0.5 BUILD#25		
Frequency	5180 MHz	5200 MHz	5240 MHz
IEEE 802.11a(20MHz)	9	9	9

**Power Parameters of IEEE 802.11n Ant. A + Ant. B**

Test Software Version	ART 0.5 BUILD#25		
Frequency	5180 MHz	5200 MHz	5240 MHz
IEEE 802.11n(20MHz)	9.5	9.5	9.5
Frequency	5190 MHz	5230 MHz	-
IEEE 802.11n(40MHz)	8	10.5	-

**2.8 EUT Operation during Test**

An executive program, EMCTEST.EXE under WIN XP, which generates a complete line of continuously repeating “ H “ pattern was used as the test software.

The NB sends “ H “ messages to the panel, and the panel displays “ H “ patterns on the screen.


Executed "ping.exe" to link with the remote workstation to receive and transmit data by LAN and WLAN.

Executed “ART 0.5 BUILD#25” to keep transmitting signals at fixed frequency.


**2.9 Test Configuration**

**2.9.1 Radiation Emissions Test Configuration**

**For radiated emissions 9kHz~1GHz**

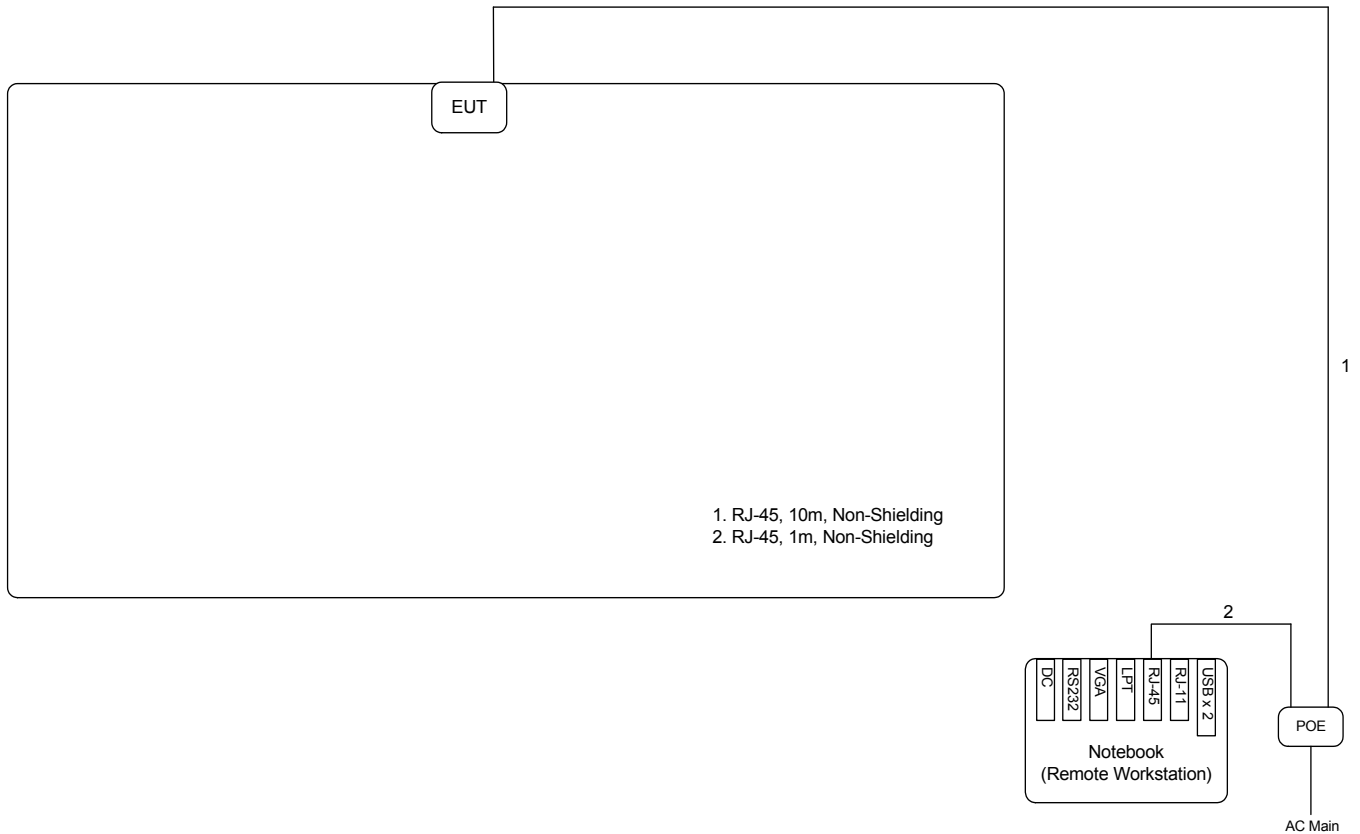

**For radiated emissions above 1GHz**

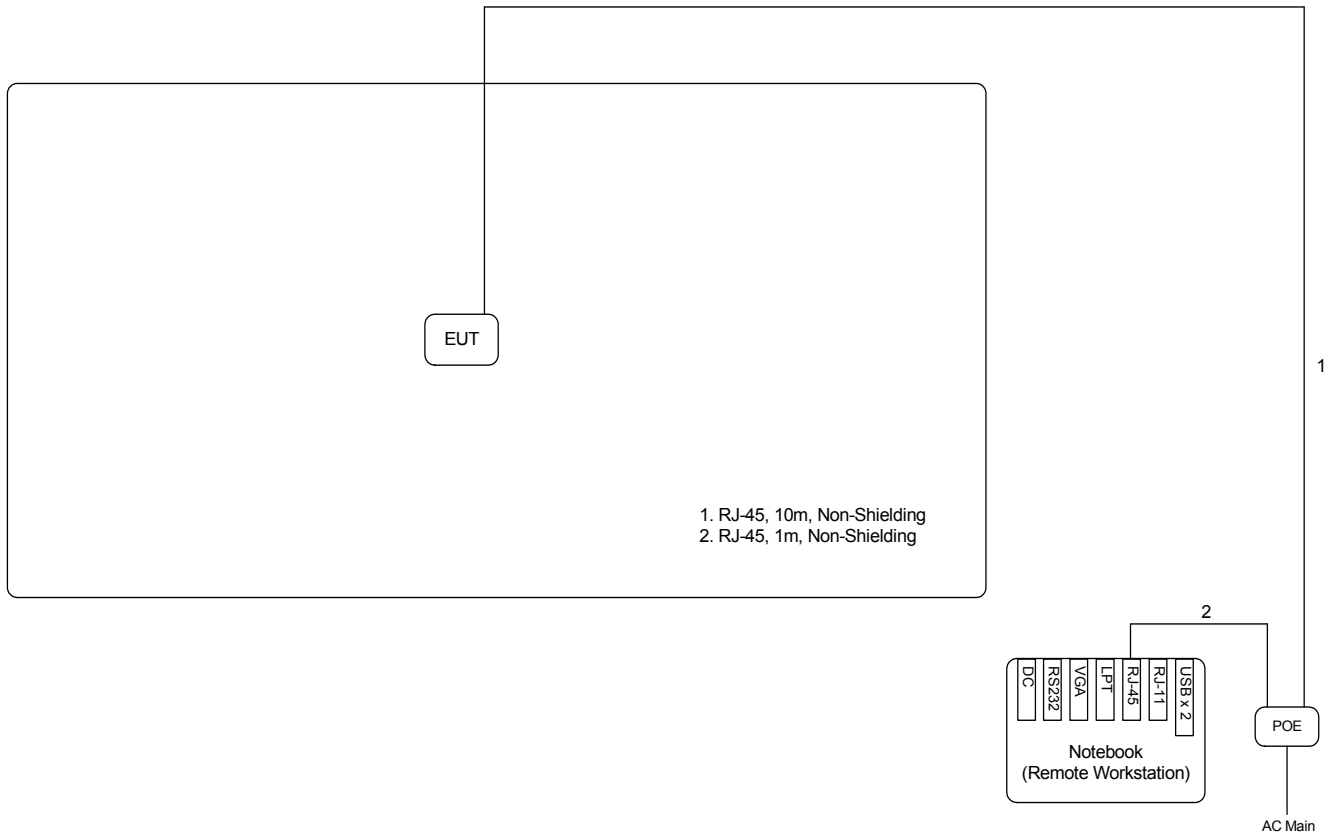

**3 TEST RESULT**

**3.1 AC Power Line Conducted Emissions Measurement**

**3.1.1 Limit**

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

**Class B**

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

**3.1.2 Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

**3.1.3 Test Procedures**

1. The EUT warm up about 15 minutes then start test.
2. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
5. The frequency range from 150 KHz to 30 MHz was searched.
6. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
7. The measurement has to be done between each power line and ground at the power terminal.

3.1.4 Test Setup Layout

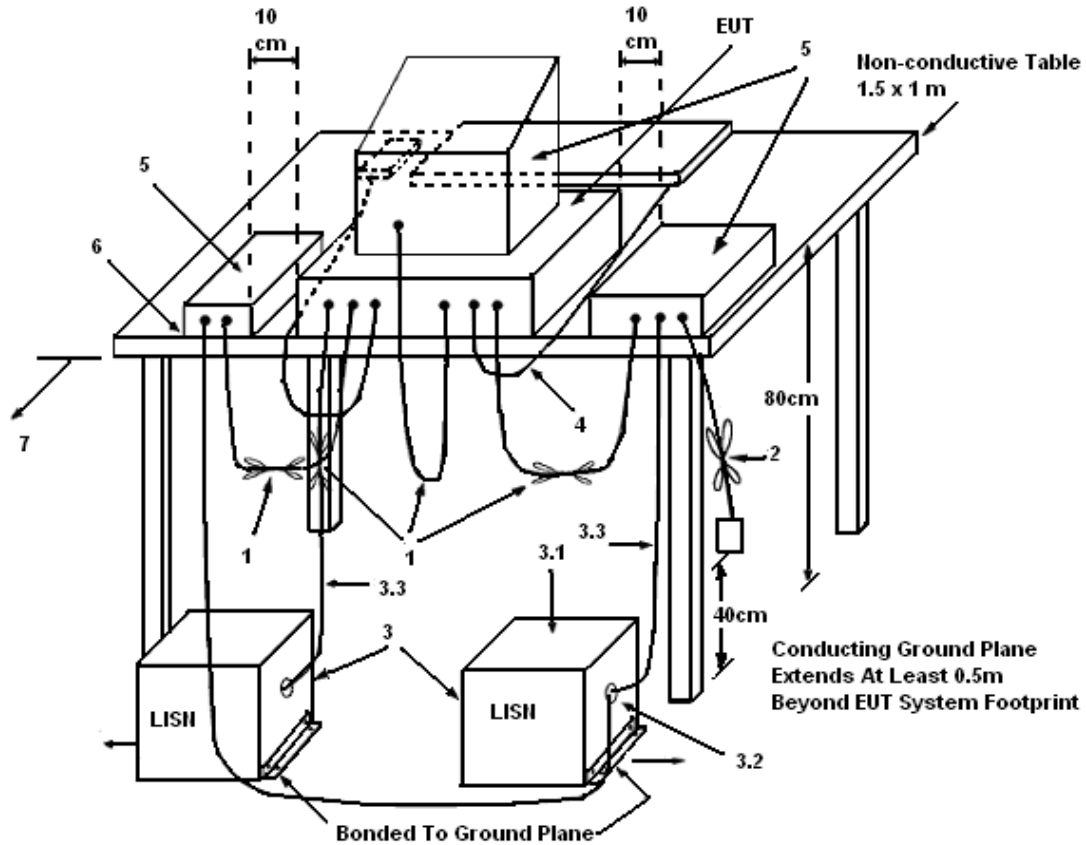

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω. LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

3.1.5 Test Deviation

There is no deviation with the original standard.


3.1.6 EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.

3.1.7 Results of AC Power Line Conducted Emissions Measurement


<b>Final Test Date</b>	Jul. 09, 2009	<b>Test Site No.</b>	CO04-HY
<b>Temperature</b>	25	<b>Humidity</b>	55%
<b>Test Engineer</b>	Chris	<b>Configuration</b>	Adapter Mode (DSA-15P-12 US)

Line

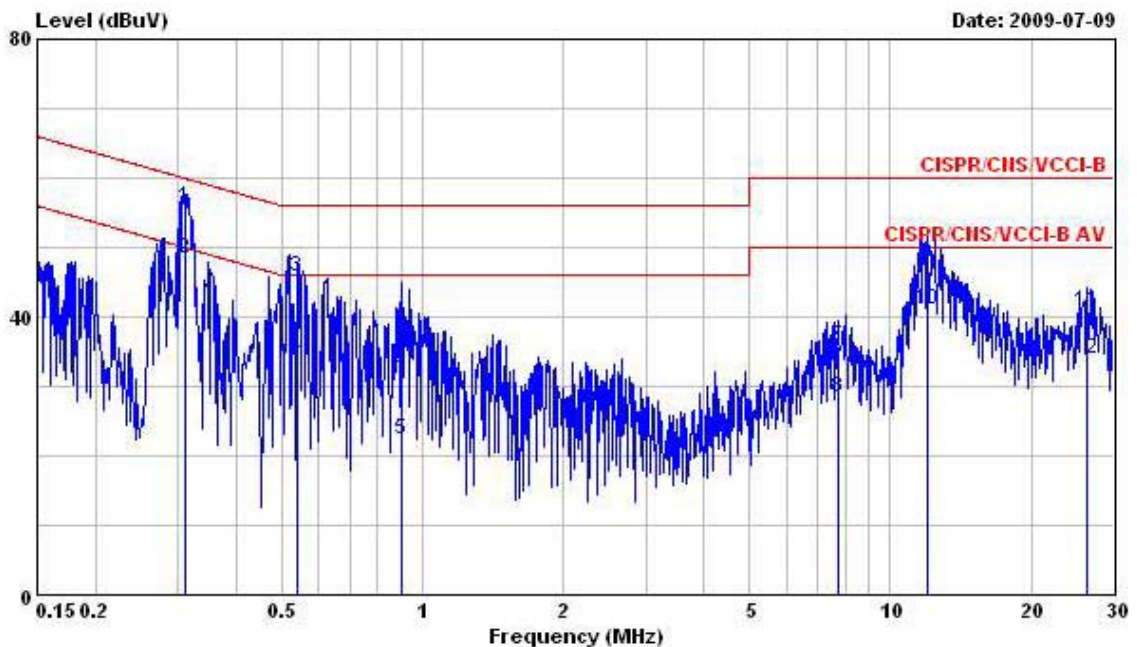

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	@0.3099790	55.87	-4.10	59.97	55.71	0.09	0.07	QP
2	@0.3099790	48.35	-1.62	49.97	48.19	0.09	0.07	Average
3	@0.5394920	45.72	-10.28	56.00	45.52	0.10	0.10	QP
4	0.5394920	34.19	-11.81	46.00	33.99	0.10	0.10	Average
5	0.8991650	22.31	-23.69	46.00	22.07	0.11	0.13	Average
6	0.8991650	32.74	-23.26	56.00	32.50	0.11	0.13	QP
7	7.730	35.80	-24.20	60.00	35.22	0.24	0.34	QP
8	7.730	28.34	-21.66	50.00	27.76	0.24	0.34	Average
9	12.000	47.54	-12.46	60.00	46.84	0.29	0.41	QP
10	@12.000	40.92	-9.08	50.00	40.22	0.29	0.41	Average
11	26.420	40.71	-19.29	60.00	39.60	0.49	0.62	QP
12	26.420	33.91	-16.09	50.00	32.80	0.49	0.62	Average

Neutral

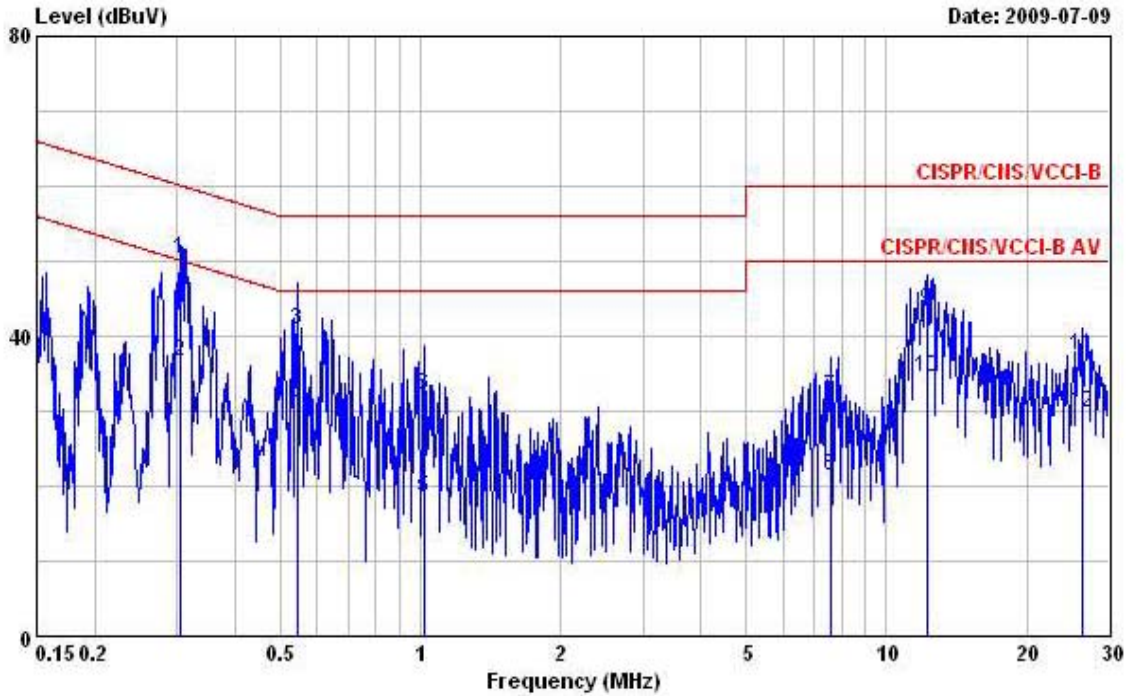


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	@0.3050910	50.23	-9.87	60.10	50.08	0.08	0.07	QP
2	0.3050910	36.58	-13.52	50.10	36.43	0.08	0.07	Average
3	0.5435530	40.81	-15.19	56.00	40.62	0.09	0.10	QP
4	0.5435530	30.61	-15.39	46.00	30.42	0.09	0.10	Average
5	1.020	18.52	-27.48	46.00	18.28	0.10	0.14	Average
6	1.020	32.11	-23.89	56.00	31.87	0.10	0.14	QP
7	7.610	31.96	-28.04	60.00	31.39	0.23	0.34	QP
8	7.610	21.37	-28.63	50.00	20.80	0.23	0.34	Average
9	12.250	43.51	-16.49	60.00	42.79	0.30	0.42	QP
10	12.250	34.39	-15.61	50.00	33.67	0.30	0.42	Average
11	26.280	37.36	-22.64	60.00	36.23	0.51	0.62	QP
12	26.280	29.75	-20.25	50.00	28.62	0.51	0.62	Average

Note:

Level = Read Level + LISN Factor + Cable Loss.

Final Test Date	Jul. 09, 2009	Test Site No.	CO04-HY
Temperature	25	Humidity	55%
Test Engineer	Chris	Configuration	Adapter Mode (DSA-20D-12 2)


Line

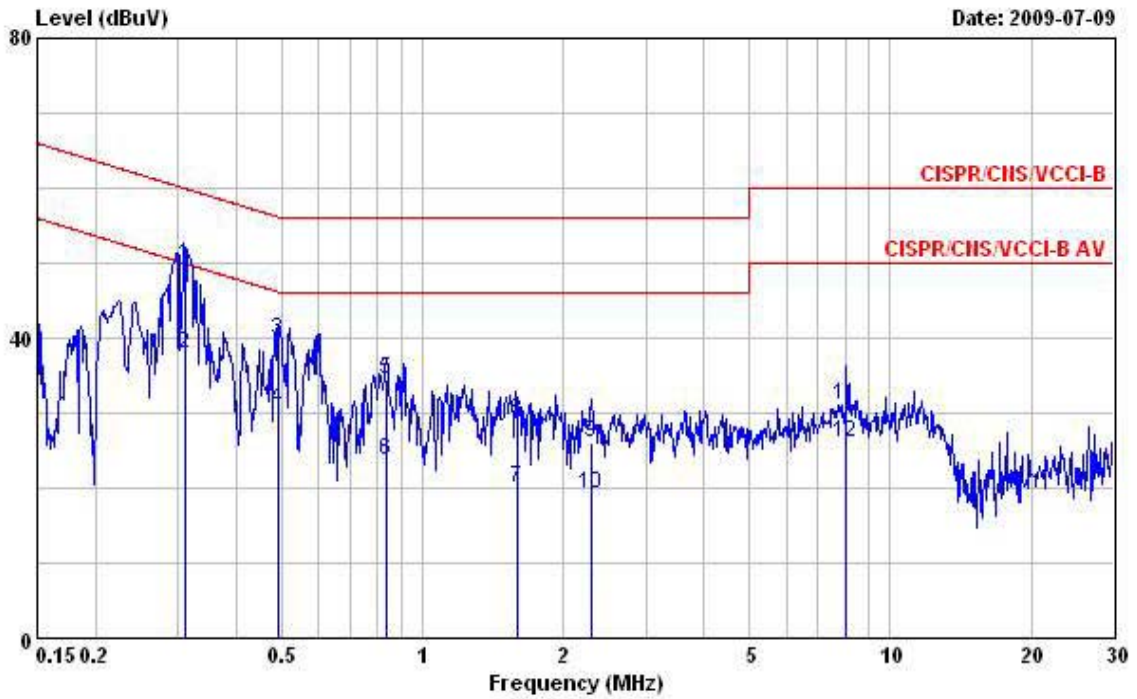

1	2	3	4	5	6	7	8	9	10	11	12
Freq	Level	Over	Limit	Read	LISN	Cable	Remark				
MHz	dBuV	Limit	Line	Level	Factor	Loss					
		dB	dBuV	dBuV	dB	dB					
1	0.3099790	49.63	-10.34	59.97	49.47	0.09	0.07	QP			
2	0.3099790	38.02	-11.95	49.97	37.86	0.09	0.07	Average			
3	0.4914980	39.67	-16.47	56.14	39.49	0.09	0.09	QP			
4	0.4914980	30.58	-15.56	46.14	30.40	0.09	0.09	Average			
5	0.8393170	34.43	-21.57	56.00	34.19	0.11	0.13	QP			
6	0.8393170	23.70	-22.30	46.00	23.46	0.11	0.13	Average			
7	1.590	19.94	-26.06	46.00	19.65	0.12	0.17	Average			
8	1.590	28.97	-27.03	56.00	28.68	0.12	0.17	QP			
9	2.300	26.05	-29.95	56.00	25.72	0.14	0.19	QP			
10	2.300	19.22	-26.78	46.00	18.89	0.14	0.19	Average			
11	8.060	31.09	-28.91	60.00	30.50	0.24	0.35	QP			
12	8.060	25.92	-24.08	50.00	25.33	0.24	0.35	Average			



Neutral

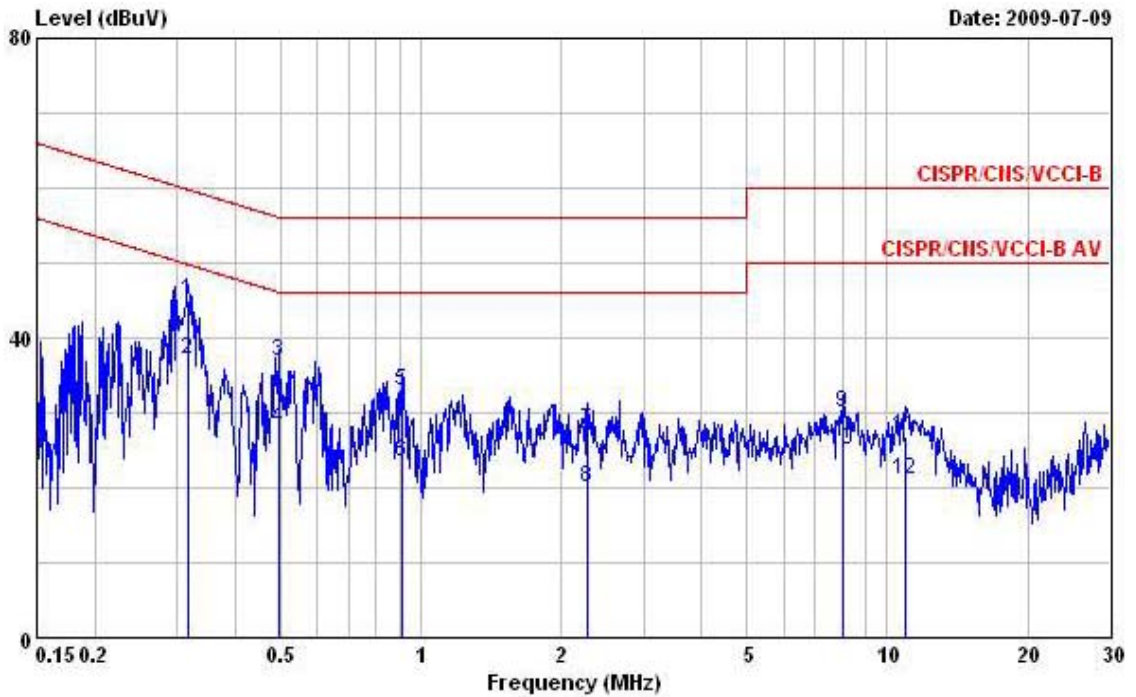


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.3166190	44.95	-14.85	59.80	44.80	0.08	0.07	QP
2	0.3166190	37.23	-12.57	49.80	37.08	0.08	0.07	Average
3	0.4941090	36.88	-19.22	56.10	36.71	0.08	0.09	QP
4	0.4941090	27.77	-18.33	46.10	27.60	0.08	0.09	Average
5	0.9135710	32.97	-23.03	56.00	32.74	0.10	0.13	QP
6	0.9135710	23.54	-22.46	46.00	23.31	0.10	0.13	Average
7	2.270	27.55	-28.45	56.00	27.24	0.12	0.19	QP
8	2.270	19.96	-26.04	46.00	19.65	0.12	0.19	Average
9	8.060	30.12	-29.88	60.00	29.54	0.23	0.35	QP
10	8.060	25.07	-24.93	50.00	24.49	0.23	0.35	Average
11	10.900	26.94	-33.06	60.00	26.26	0.28	0.40	QP
12	10.900	20.96	-29.04	50.00	20.28	0.28	0.40	Average

Note:

Level = Read Level + LISN Factor + Cable Loss.


<b>Final Test Date</b>	Jul. 09, 2009	<b>Test Site No.</b>	CO04-HY
<b>Temperature</b>	25	<b>Humidity</b>	55%
<b>Test Engineer</b>	Chris	<b>Configuration</b>	POE Mode (Power Supply: POE20U-560(G) -R)

Line

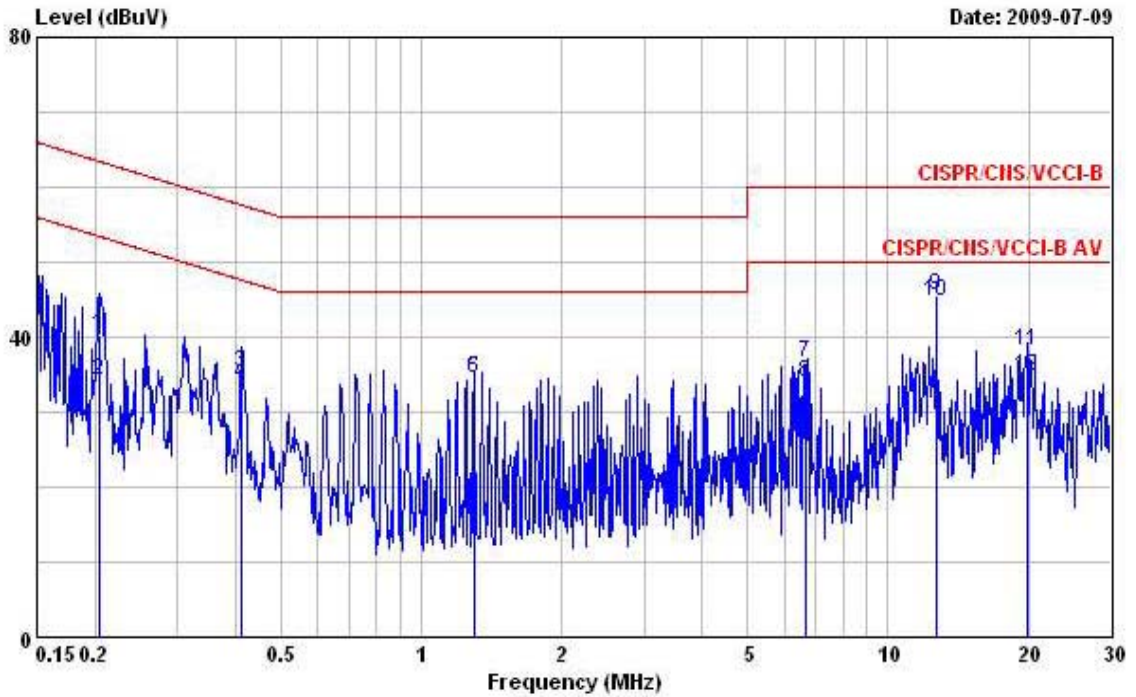

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.2050460	40.38	-23.02	63.40	40.24	0.08	0.06	QP
2	0.2050460	34.28	-19.12	53.40	34.14	0.08	0.06	Average
3	0.4126560	35.19	-22.40	57.59	35.02	0.09	0.08	QP
4	0.4126560	33.57	-14.02	47.59	33.40	0.09	0.08	Average
5	1.296	34.43	-21.57	56.00	34.16	0.12	0.15	QP
6	1.296	34.34	-11.66	46.00	34.07	0.12	0.15	Average
7	6.688	36.48	-23.52	60.00	35.94	0.22	0.32	QP
8	6.688	33.87	-16.13	50.00	33.33	0.22	0.32	Average
9	12.709	45.48	-14.52	60.00	44.76	0.30	0.42	QP
10	12.709	44.64	-5.36	50.00	43.92	0.30	0.42	Average
11	19.966	38.16	-21.84	60.00	37.23	0.40	0.53	QP
12	19.966	34.86	-15.14	50.00	33.93	0.40	0.53	Average

Neutral

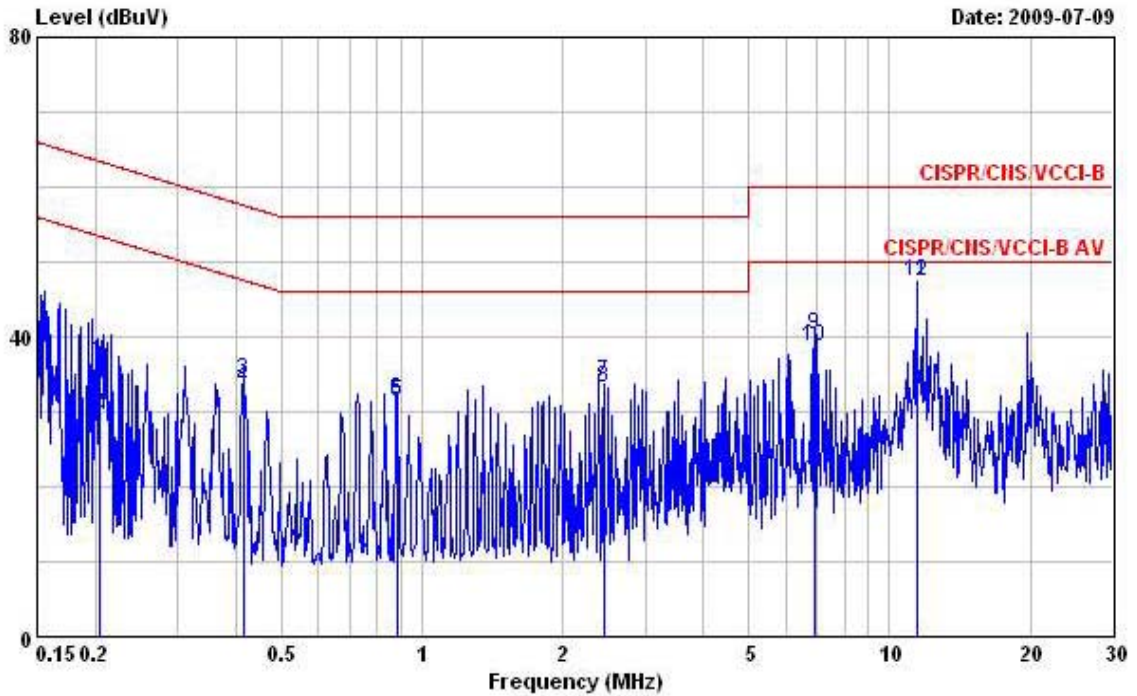

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.2040370	36.96	-26.48	63.44	36.82	0.08	0.06	QP
2	0.2040370	29.79	-23.65	53.44	29.65	0.08	0.06	Average
3	0.4148480	34.08	-23.47	57.55	33.92	0.08	0.08	QP
4	0.4148480	33.26	-14.29	47.55	33.10	0.08	0.08	Average
5	0.8836060	31.36	-14.64	46.00	31.13	0.10	0.13	Average
6	0.8836060	31.51	-24.49	56.00	31.28	0.10	0.13	QP
7	2.441	33.84	-22.16	56.00	33.52	0.12	0.20	QP
8	2.441	33.18	-12.82	46.00	32.86	0.12	0.20	Average
9	6.905	40.32	-19.68	60.00	39.78	0.22	0.32	QP
10	6.905	38.75	-11.25	50.00	38.21	0.22	0.32	Average
11	11.411	47.25	-12.75	60.00	46.57	0.28	0.40	QP
12	11.411	47.27	-2.73	50.00	46.59	0.28	0.40	Average

Note:

Level = Read Level + LISN Factor + Cable Loss.

**3.2 99% Occupied Bandwidth Measurement**

**3.2.1 Limit**

No restriction limits. But resolution bandwidth within band edge measurement is 1% of the 99% occupied bandwidth.

**3.2.2 Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RB	300 kHz
VB	1000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

**3.2.3 Test Procedures**

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 300 kHz and the video bandwidth of 1000 kHz were used.
3. Measured the spectrum width with power higher than 26dB below carrier.
4. Measuring multiple antennas, the connectors are required to link with Spectrum Analyzer through a combiner.

**3.2.4 Test Setup Layout**

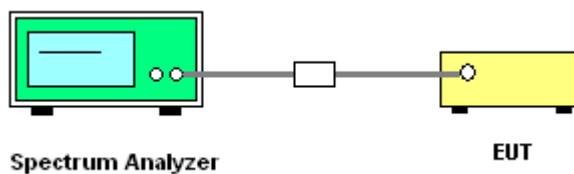

**3.2.5 Test Deviation**

There is no deviation with the original standard.

**3.2.6 EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

**3.2.7 Test Result of 99% Occupied Bandwidth**

<b>Final Test Date</b>	Mar. 02, 2010	<b>Test Site No.</b>	TH01-HY
<b>Temperature</b>	24	<b>Humidity</b>	55%
<b>Test Engineer</b>	Duncan	<b>Configuration</b>	802.11a/n

**For Two Chain:**

**Configuration of IEEE 802.11a Ant. A + Ant. B**

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	21.55	16.11
40	5200 MHz	21.63	16.11
48	5240 MHz	23.00	17.31

**Configuration IEEE 802.11n Ant. A + Ant. B (20MHz)**


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	23.24	17.87
40	5200 MHz	23.40	17.95
48	5240 MHz	23.72	17.95

**Configuration IEEE 802.11n Ant. A + Ant. B (40MHz)**

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
38	5190 MHz	44.39	36.54
46	5230 MHz	43.75	36.54


For Two Chain:

26 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5180 MHz

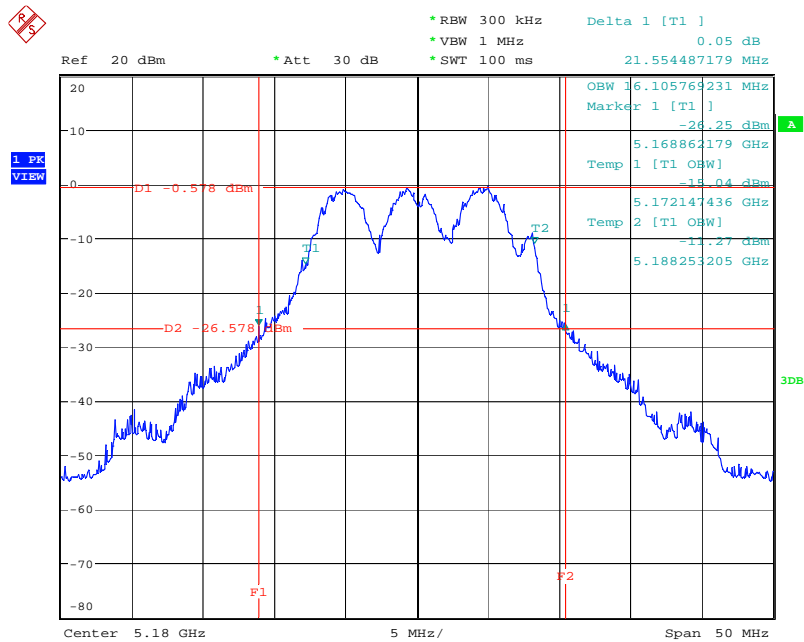


Date: 2.MAR.2010 15:40:41

26 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5200 MHz

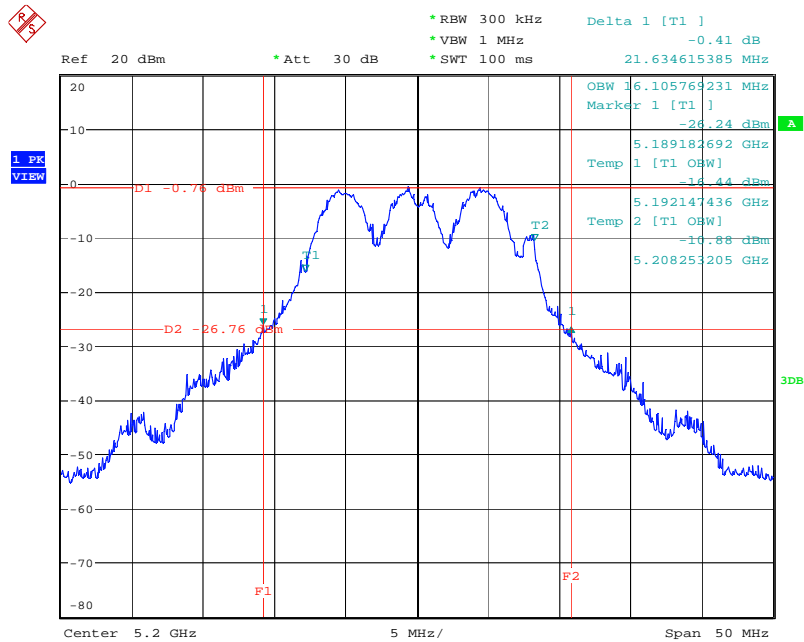


Date: 2.MAR.2010 15:42:15

26 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5240 MHz

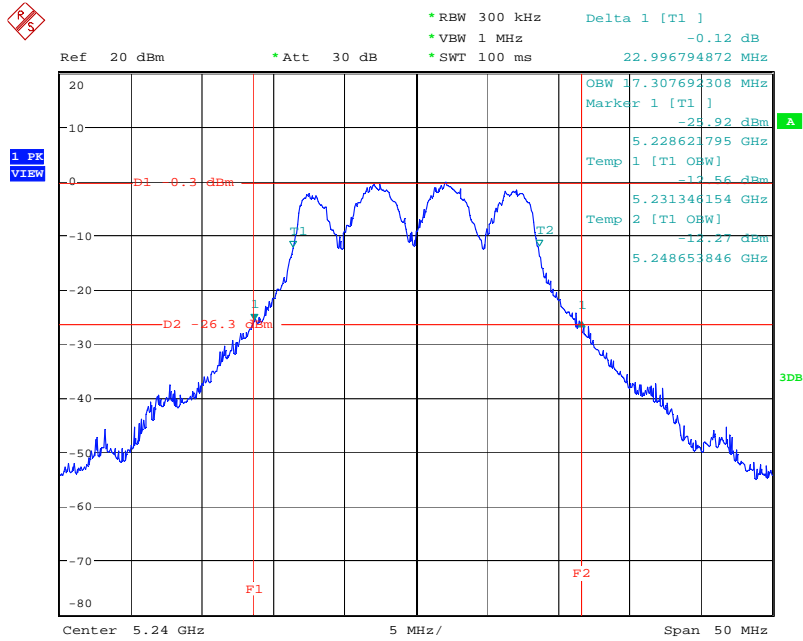


Date: 2.MAR.2010 15:43:28

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. A + Ant. B (20MHz)/ 5180 MHz

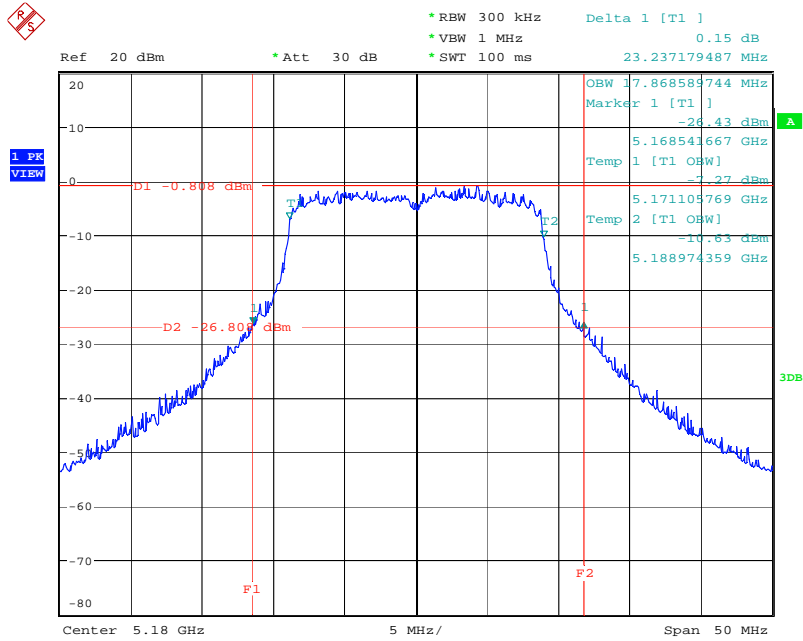

Date: 2.MAR.2010 16:09:06


26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. A + Ant. B (20MHz) / 5200 MHz

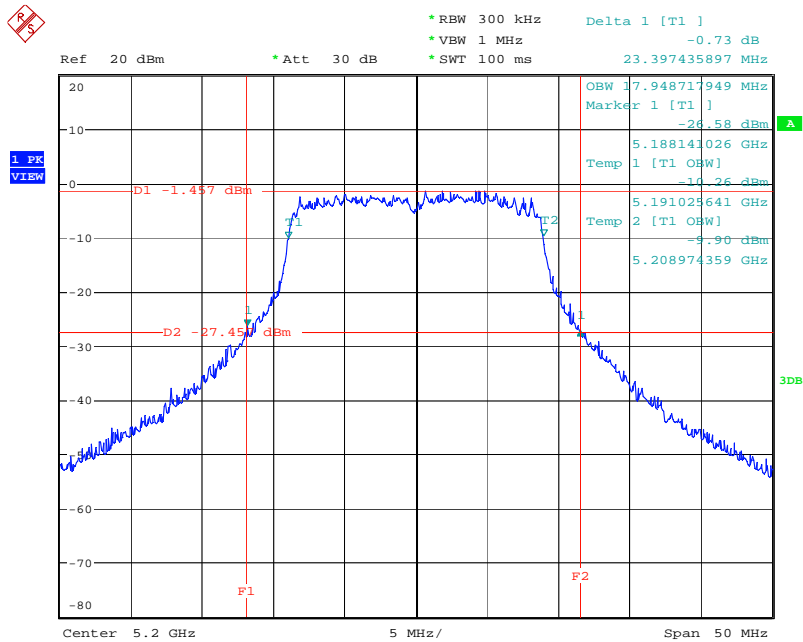

Date: 2.MAR.2010 16:10:44




26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. A + Ant. B (20MHz)/ 5240 MHz

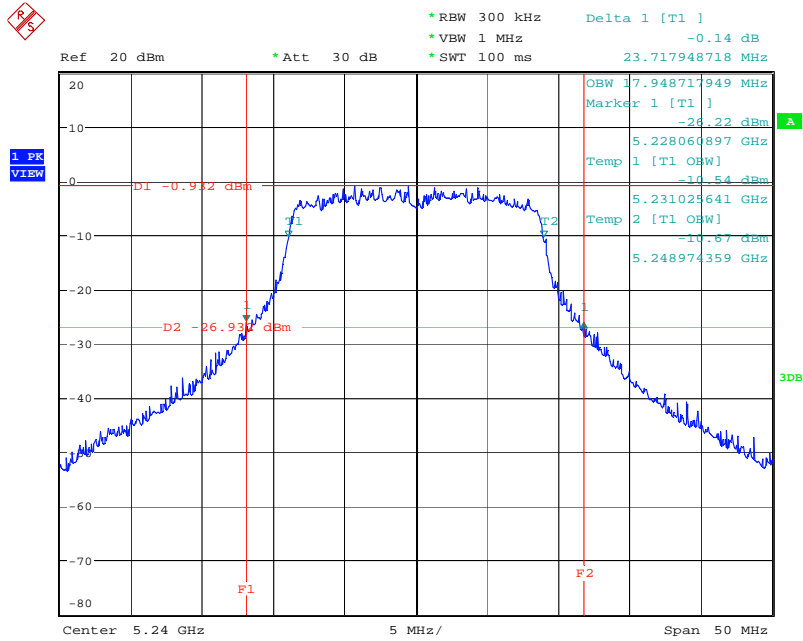


Date: 2.MAR.2010 16:11:58

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. A + Ant. B (40MHz)/ 5190 MHz

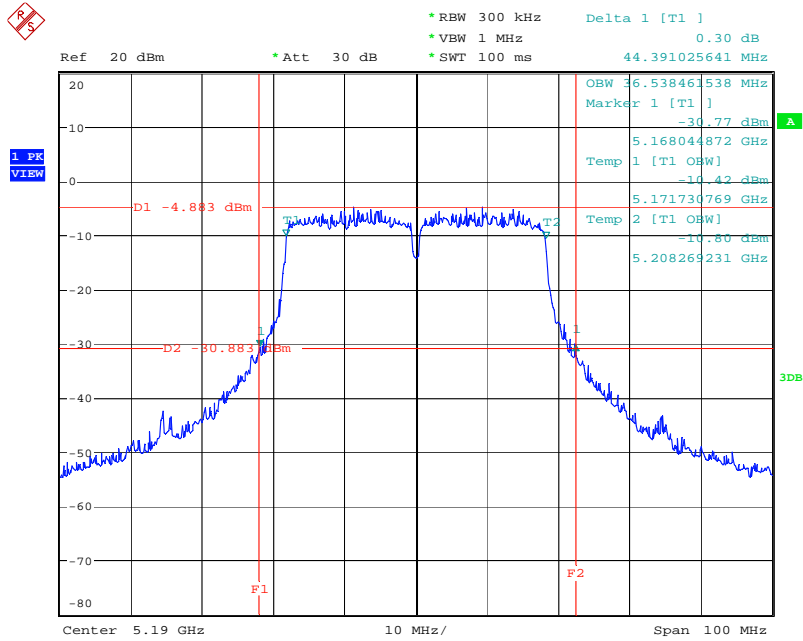

Date: 2.MAR.2010 16:21:09

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. A + Ant. B (40MHz) / 5230 MHz

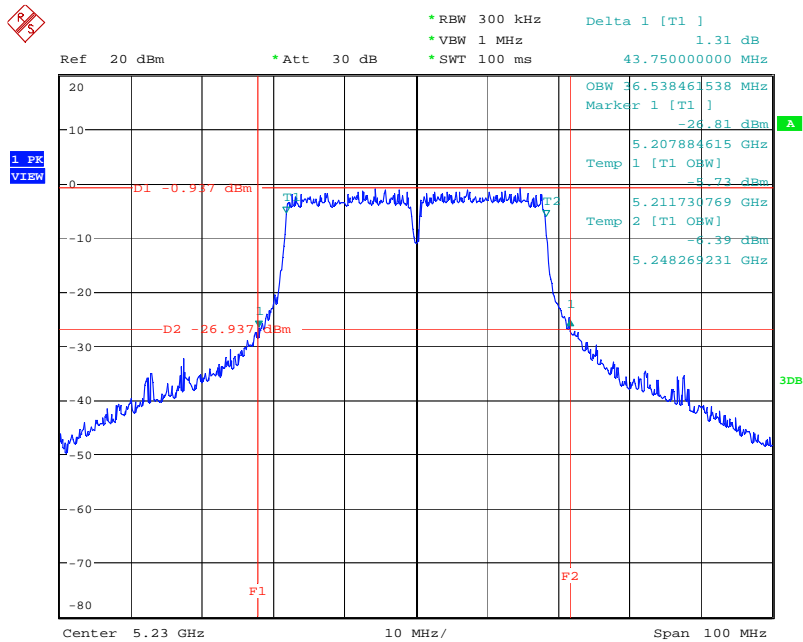

Date: 2.MAR.2010 16:23:12

**3.3 Maximum Conducted Output Power Measurement**

**3.3.1 Limit**

For the band 5.15~5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW (17dBm) or 4 dBm + 10log B, where B is the 26 dB emissions bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power and power density from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**3.3.2 Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	300 kHz
Detector	Sample
Trace	Max Hold
Sweep Time	60s

**3.3.3 Test Procedures**

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Test was performed in accordance with method #3 of FCC Public Notice DA-02-2138.
3. When measuring maximum conducted output power within multiple antenna systems, add every result of the values by mathematic formula.

**3.3.4 Test Setup Layout**

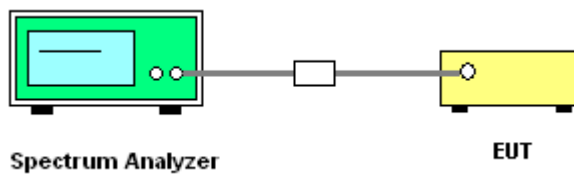

**3.3.5 Test Deviation**

There is no deviation with the original standard.

**3.3.6 EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

**3.3.7 Test Result of Maximum Conducted Output Power**

<b>Final Test Date</b>	Mar. 02, 2010	<b>Test Site No.</b>	TH01-HY
<b>Temperature</b>	24	<b>Humidity</b>	55%
<b>Test Engineer</b>	Duncan	<b>Configuration</b>	802.11a/n

**For Two Chain:**

**Configuration of IEEE 802.11a Ant. A**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	9.37	17.00	<b>Complies</b>
40	5200 MHz	9.84	17.00	<b>Complies</b>
48	5240 MHz	9.55	17.00	<b>Complies</b>

**Configuration IEEE 802.11a Ant. B**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	8.31	17.00	<b>Complies</b>
40	5200 MHz	8.45	17.00	<b>Complies</b>
48	5240 MHz	8.65	17.00	<b>Complies</b>

**Configuration IEEE 802.11a Ant. A + Ant. B**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	11.88	17.00	<b>Complies</b>
40	5200 MHz	12.21	17.00	<b>Complies</b>
48	5240 MHz	12.13	17.00	<b>Complies</b>

**Configuration IEEE 802.11n Ant. A (20MHz)**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	10.02	17.00	<b>Complies</b>
40	5200 MHz	9.96	17.00	<b>Complies</b>
48	5240 MHz	9.85	17.00	<b>Complies</b>

**Configuration IEEE 802.11n Ant. B (20MHz)**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	8.82	17.00	<b>Complies</b>
40	5200 MHz	8.64	17.00	<b>Complies</b>
48	5240 MHz	8.96	17.00	<b>Complies</b>

**Configuration IEEE 802.11n Ant. A + Ant. B (20MHz)**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	12.47	17.00	<b>Complies</b>
40	5200 MHz	12.36	17.00	<b>Complies</b>
48	5240 MHz	12.44	17.00	<b>Complies</b>

**Configuration IEEE 802.11n Ant. A (40MHz)**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
38	5190 MHz	8.48	17.00	Complies
46	5230 MHz	10.33	17.00	Complies

**Configuration IEEE 802.11n Ant. B (40MHz)**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
38	5190 MHz	7.57	17.00	Complies
46	5230 MHz	9.93	17.00	Complies

**Configuration IEEE 802.11n Ant. A + Ant. B (40MHz)**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
38	5190 MHz	11.06	17.00	Complies
46	5230 MHz	13.14	17.00	Complies

**3.4 Power Spectral Density Measurement**

**3.4.1 Limit**

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits and decrease power density limit rule refer to section 3.3.1.

Frequency Range	Power Spectral Density limit (dBm/MHz)
5.15~5.25 GHz	4
5.25-5.35 GHz	11
5.725-5.825	17

**3.4.2 Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	3000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

**3.4.3 Test Procedures**

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 3000kHz. Set Detector to Peak, Trace to Max Hold. Mark the frequency with maximum peak power as the center of the display of the spectrum.
3. Measuring multiple antennas, the connectors are required to link with Spectrum Analyzer through a combiner.

**3.4.4 Test Setup Layout**

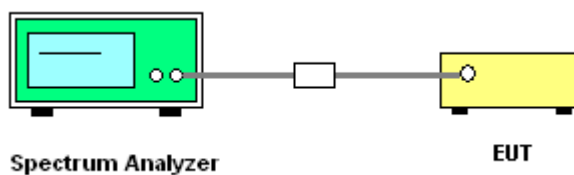

**3.4.5 Test Deviation**

There is no deviation with the original standard.

**3.4.6 EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

**3.4.7 Test Result of Power Spectral Density**

<b>Final Test Date</b>	Mar. 02, 2010	<b>Test Site No.</b>	TH01-HY
<b>Temperature</b>	24	<b>Humidity</b>	55%
<b>Test Engineer</b>	Duncan	<b>Configuration</b>	802.11a/n

**For Two Chain:**

**Configuration of IEEE 802.11a Ant. A + Ant. B**

Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
5180 MHz	3.75	4.00	<b>Complies</b>
5200 MHz	3.47	4.00	<b>Complies</b>
5240 MHz	3.82	4.00	<b>Complies</b>

**Configuration IEEE 802.11n Ant. A + Ant. B (20MHz)**

Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
5180 MHz	3.29	4.00	<b>Complies</b>
5200 MHz	3.50	4.00	<b>Complies</b>
5240 MHz	3.57	4.00	<b>Complies</b>


**Configuration IEEE 802.11n Ant. A + Ant. B (40MHz)**

Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
5190 MHz	-0.51	4.00	<b>Complies</b>
5230 MHz	3.77	4.00	<b>Complies</b>




For Two Chain:

Power Density Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5180 MHz

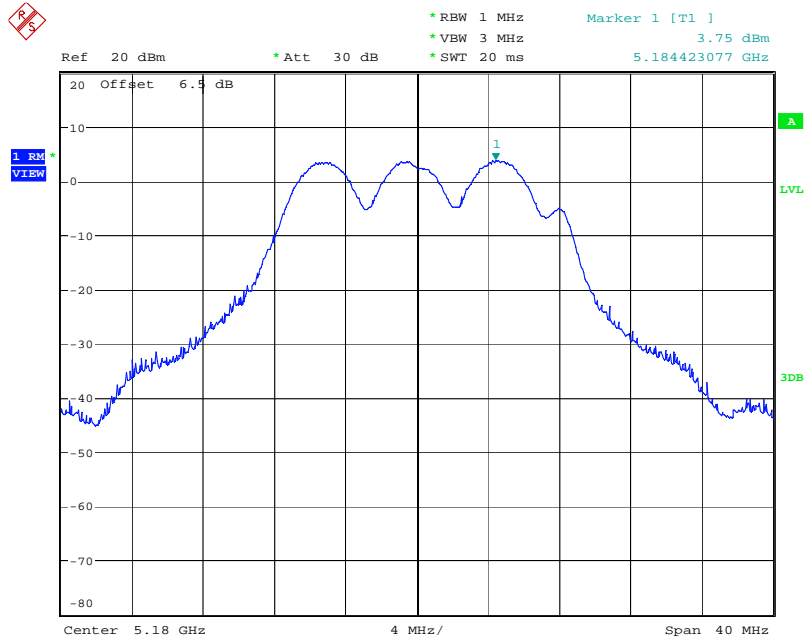

Date: 2.MAR.2010 15:40:30


Power Density Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5200 MHz

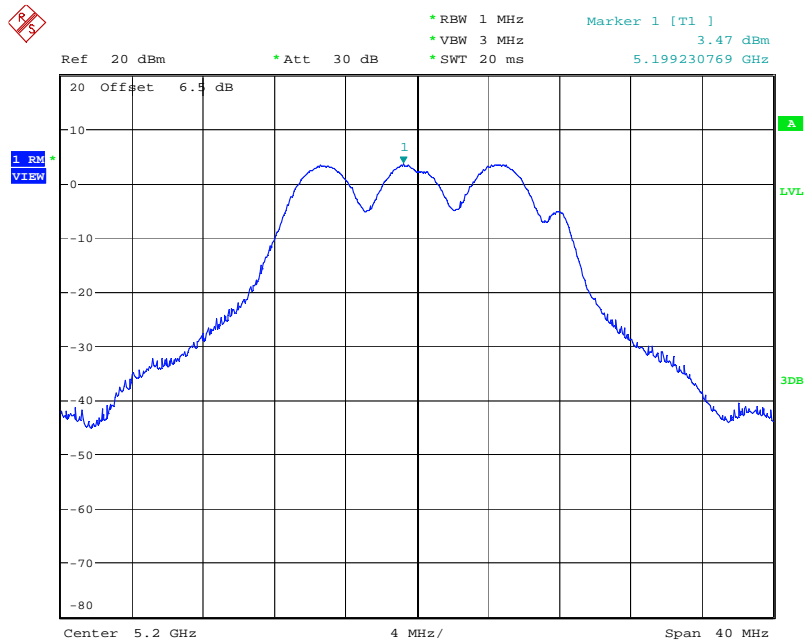

Date: 2.MAR.2010 15:42:05




Power Density Plot on Configuration IEEE 802.11n Ant. A + Ant. B (20MHz) / 5180 MHz

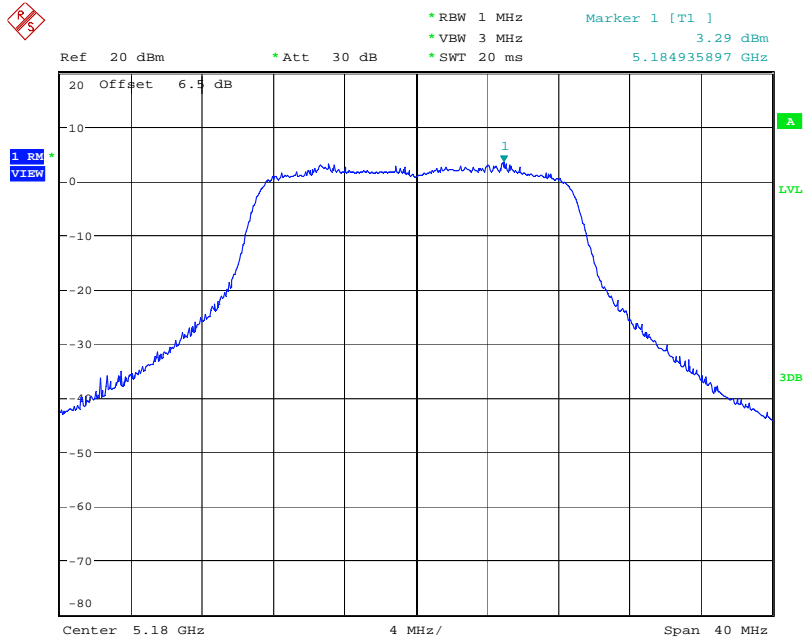


Date: 2.MAR.2010 16:08:55

Power Density Plot on Configuration IEEE 802.11n Ant. A + Ant. B (20MHz) / 5200 MHz

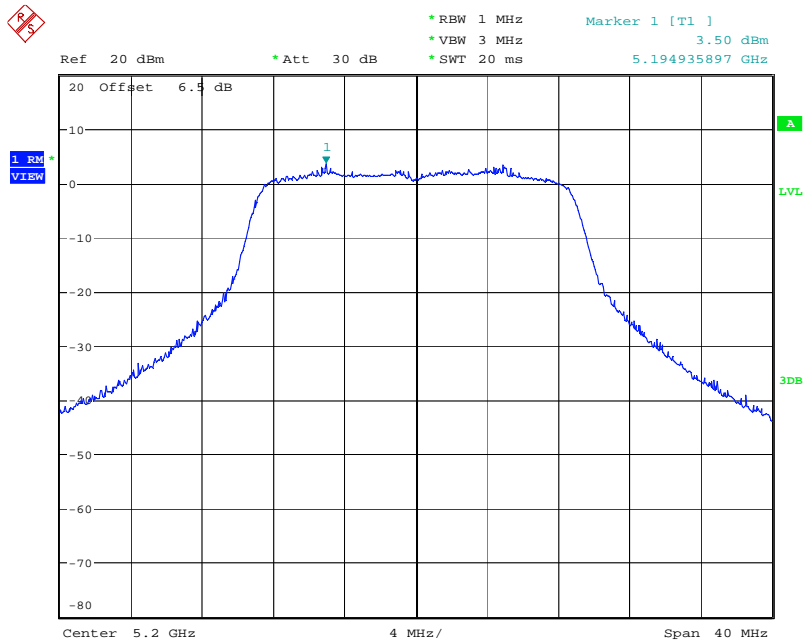


Date: 2.MAR.2010 16:10:34

Power Density Plot on Configuration IEEE 802.11n Ant. A + Ant. B (20MHz) / 5240 MHz

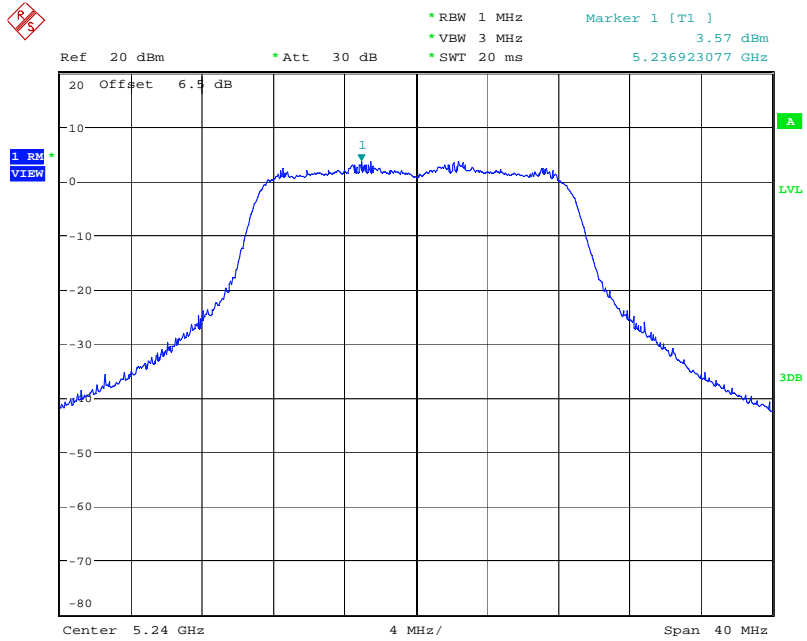


Date: 2.MAR.2010 16:11:47

Power Density Plot on Configuration IEEE 802.11n Ant. A + Ant. B (40MHz) / 5190 MHz

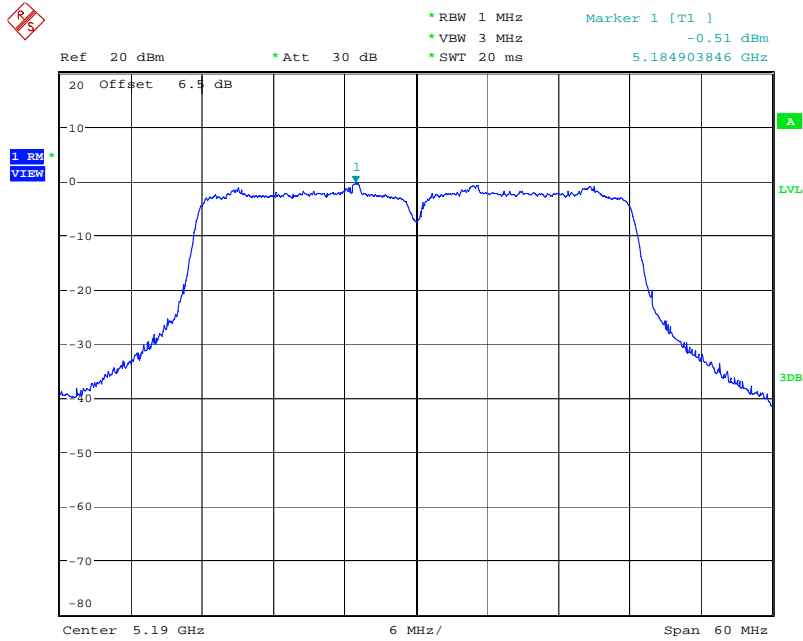

Date: 2.MAR.2010 16:20:59

Power Density Plot on Configuration IEEE 802.11n Ant. A + Ant. B (40MHz) / 5230 MHz

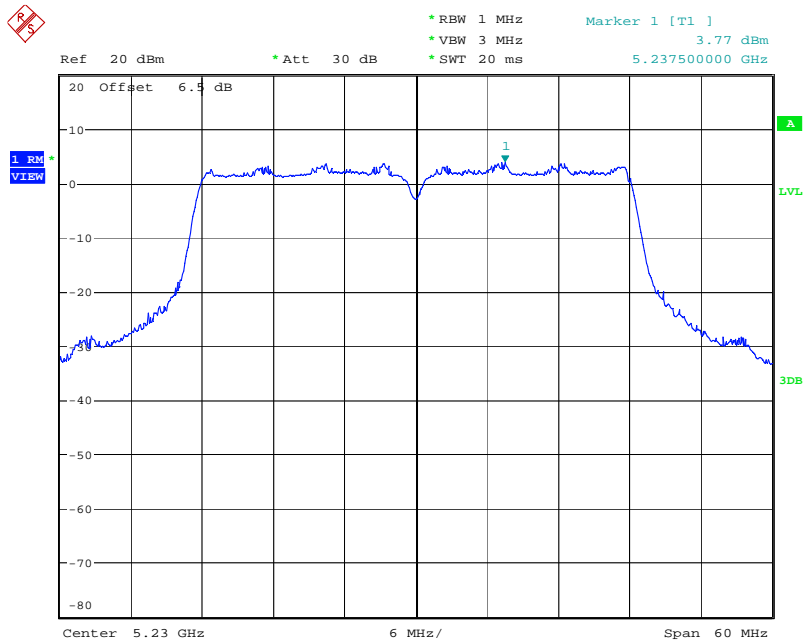

Date: 2.MAR.2010 16:23:02

**3.5 Peak Excursion Measurement**

**3.5.1 Limit**

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.

**3.5.2 Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz (Peak Trace) / 1000 kHz (Average Trace)
VB	3000 kHz (Peak Trace) / 300 kHz (Average Trace)
Detector	Peak (Peak Trace) / Sample (Average Trace)
Trace	Max Hold
Sweep Time	60s

**3.5.3 Test Procedures**

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set the spectrum analyzer span to view the entire emissions bandwidth. The largest difference between the following two traces (Peak Trace and Average Trace) must be  $\leq 13$  dB for all frequencies across the emissions bandwidth. Submit a plot.
3. Peak Trace: Set RBW = 1 MHz, VBW  $\geq 3$  MHz with peak detector and max-hold settings.
4. Average Trace: Method #3—video averaging with max hold—and sum power across the band. Set span to encompass the entire emissions bandwidth (EBW) of the signal. Set sweep trigger to “free run”. Set RBW = 1 MHz. Set VBW  $\geq 1/T$  (IEEE 802.11a VBW = 300kHz  $\geq 1/4\mu$ s). Use sample detector mode if bin width (i.e., span/number of points in spectrum)  $< 0.5$  RBW. Otherwise use peak detector mode. Set max hold. Allow max hold to run for 60 seconds.
5. Measuring multiple antennas, the connectors are required to link with Spectrum Analyzer through a combiner.

**3.5.4 Test Setup Layout**

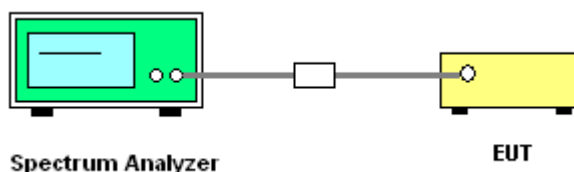

**3.5.5 Test Deviation**

There is no deviation with the original standard.

**3.5.6 EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

**3.5.7 Test Result of Peak Excursion**

<b>Final Test Date</b>	Mar. 02, 2010	<b>Test Site No.</b>	TH01-HY
<b>Temperature</b>	24	<b>Humidity</b>	55%
<b>Test Engineer</b>	Duncan	<b>Configuration</b>	802.11a/n

**For Two Chain:**

**Configuration of IEEE 802.11a Ant. A + Ant. B**

Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
5180 MHz	8.41	13	<b>Complies</b>
5200 MHz	8.53	13	<b>Complies</b>
5240 MHz	8.52	13	<b>Complies</b>

**Configuration IEEE 802.11n Ant. A + Ant. B (20MHz)**


Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
5180 MHz	10.15	13	<b>Complies</b>
5200 MHz	9.87	13	<b>Complies</b>
5240 MHz	10.10	13	<b>Complies</b>

**Configuration IEEE 802.11n Ant. A + Ant. B (40MHz)**

Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
5190 MHz	10.05	13	<b>Complies</b>
5230 MHz	11.04	13	<b>Complies</b>


For Two Chain:

Peak Excursion Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5180 MHz

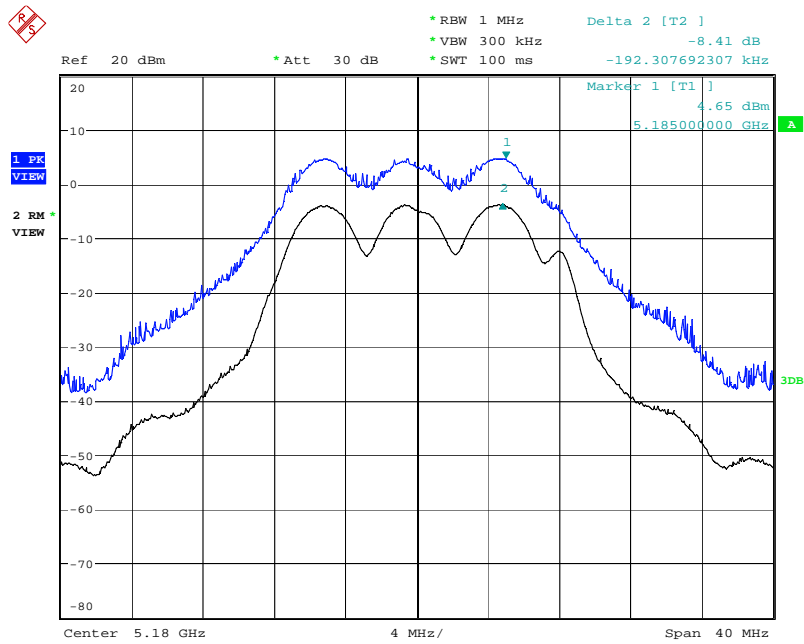

Date: 2.MAR.2010 15:40:56


Peak Excursion Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5200 MHz

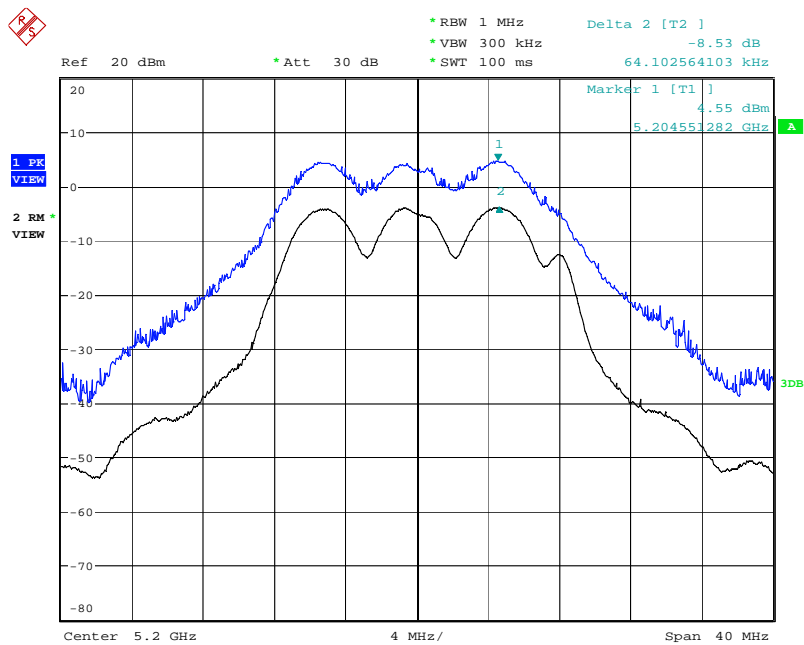

Date: 2.MAR.2010 15:42:30




Peak Excursion Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5240 MHz

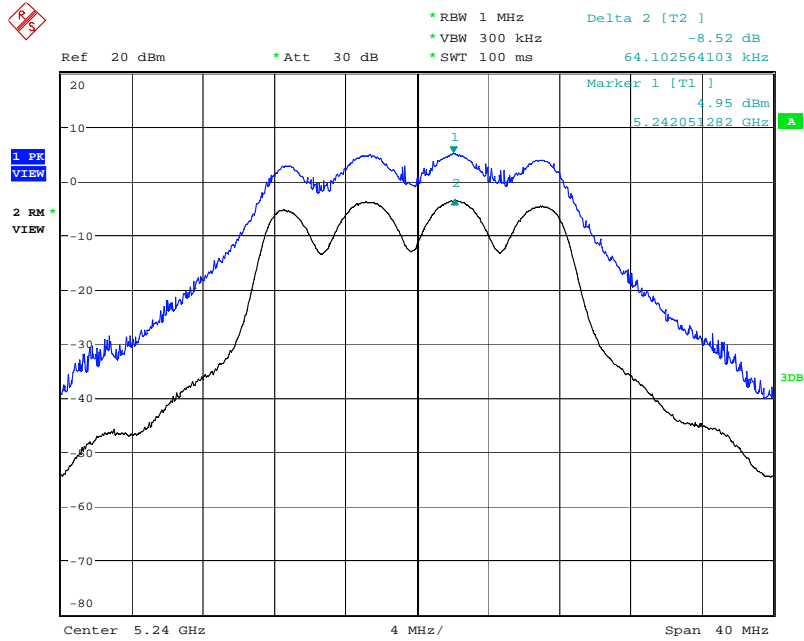


Date: 2.MAR.2010 15:43:43

Peak Excursion Plot on Configuration IEEE 802.11n Ant. A + Ant. B (20MHz) / 5180 MHz

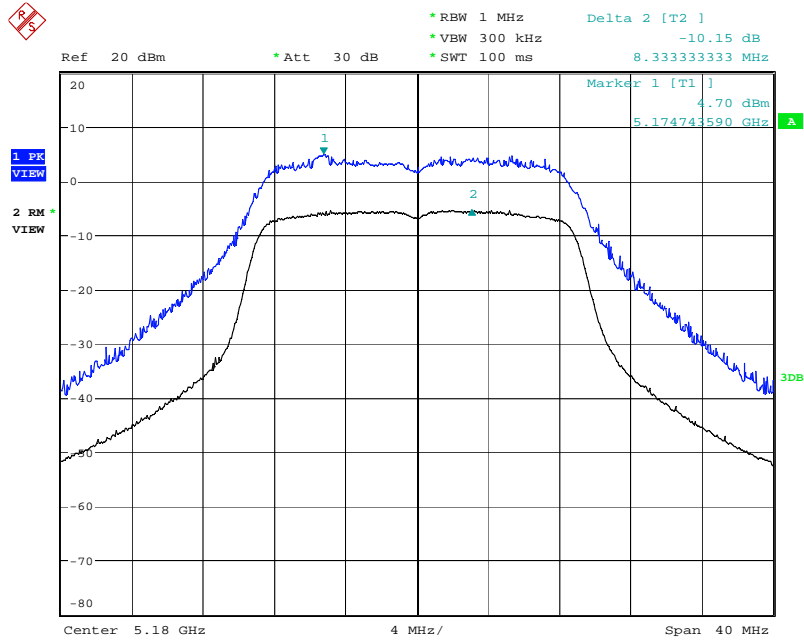


Date: 2.MAR.2010 16:09:21

Peak Excursion Plot on Configuration IEEE 802.11n Ant. A + Ant. B (20MHz) / 5200 MHz

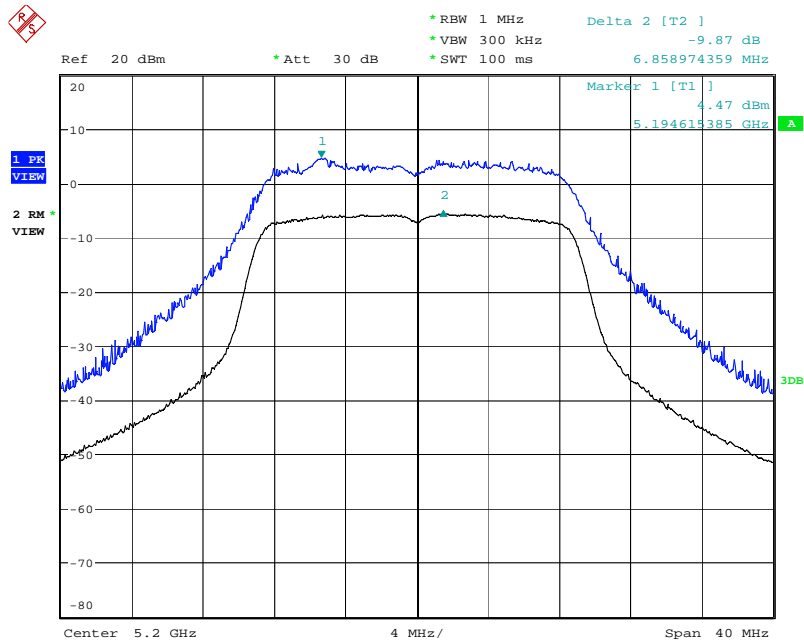


Date: 2.MAR.2010 16:10:59

Peak Excursion Plot on Configuration IEEE 802.11n Ant. A + Ant. B (20MHz) / 5240 MHz

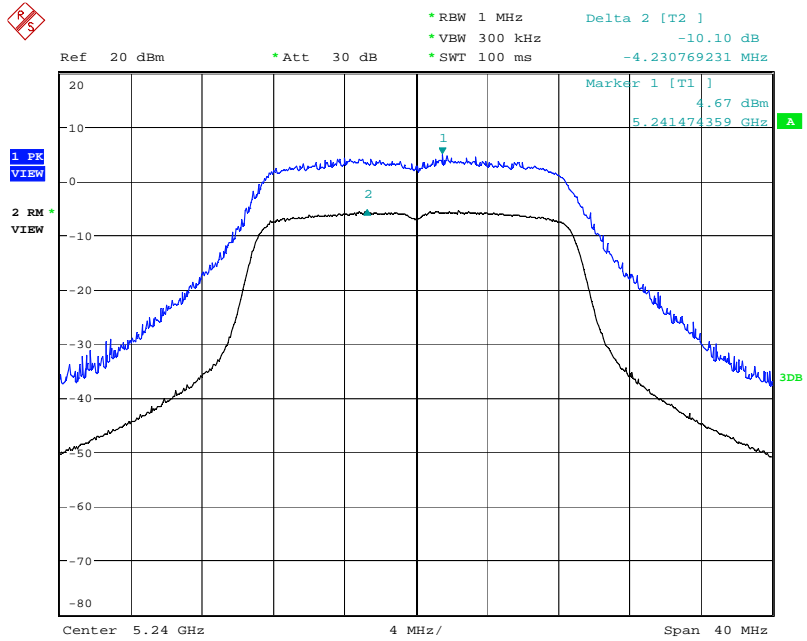


Peak Excursion Plot on Configuration IEEE 802.11n Ant. A + Ant. B (40MHz) / 5190 MHz

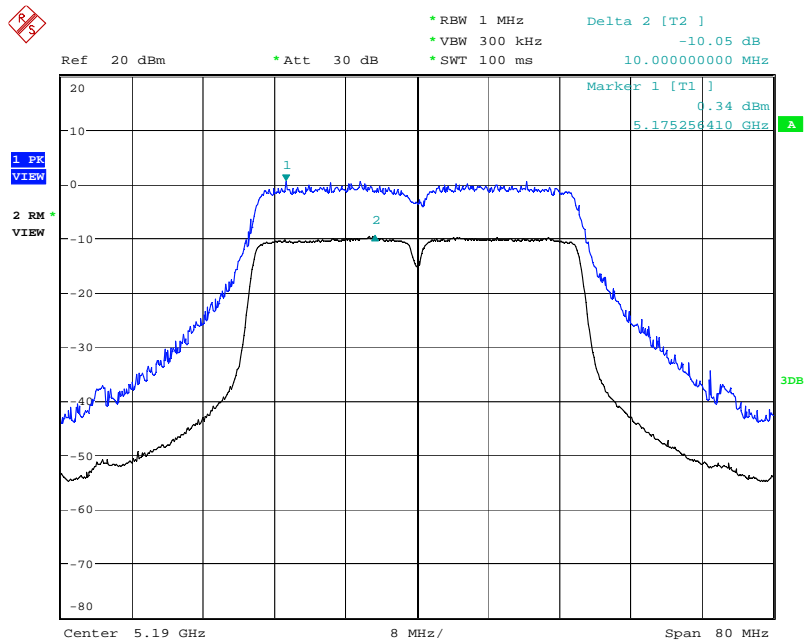

Date: 2.MAR.2010 16:21:24

Peak Excursion Plot on Configuration IEEE 802.11n Ant. A + Ant. B (40MHz) / 5230 MHz

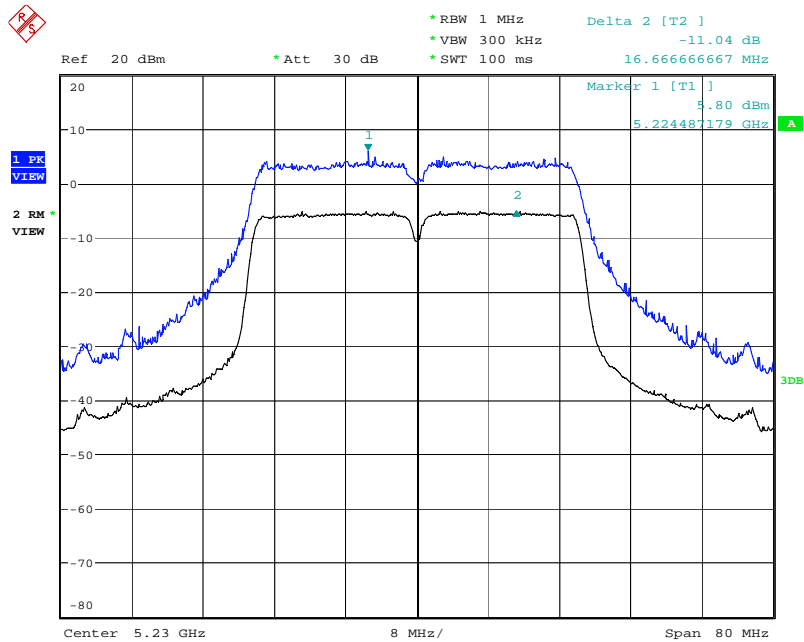

Date: 2.MAR.2010 16:23:28

**3.6 Radiated Emissions Measurement**

**3.6.1 Limit**

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz (78.3dBuV/m at 3m); for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

<b>Frequencies (MHz)</b>	<b>Field Strength (micorvolts/meter)</b>	<b>Measurement Distance (meters)</b>
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

**3.6.2 Measuring Instruments and Setting**

Please refer to section 4 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

<b>Spectrum Parameter</b>	<b>Setting</b>
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for peak


<b>Receiver Parameter</b>	<b>Setting</b>
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

**3.6.3 Test Procedures**


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

3.6.4 Test Setup Layout

For radiated emissions below 30MHz

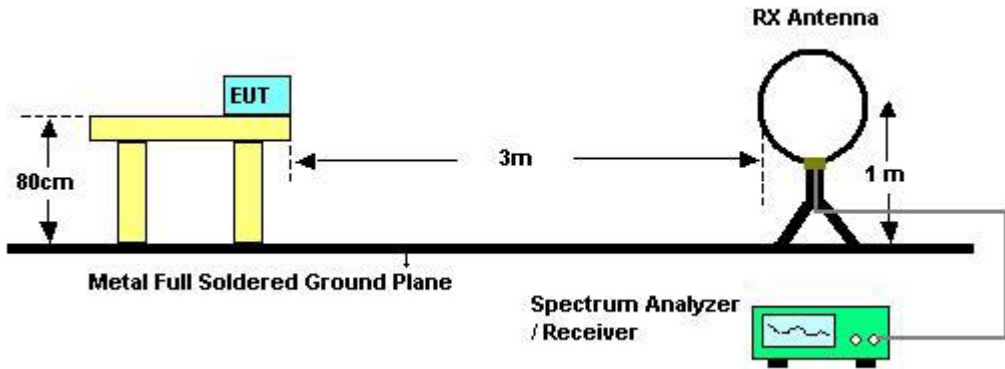

For radiated emissions above 30MHz

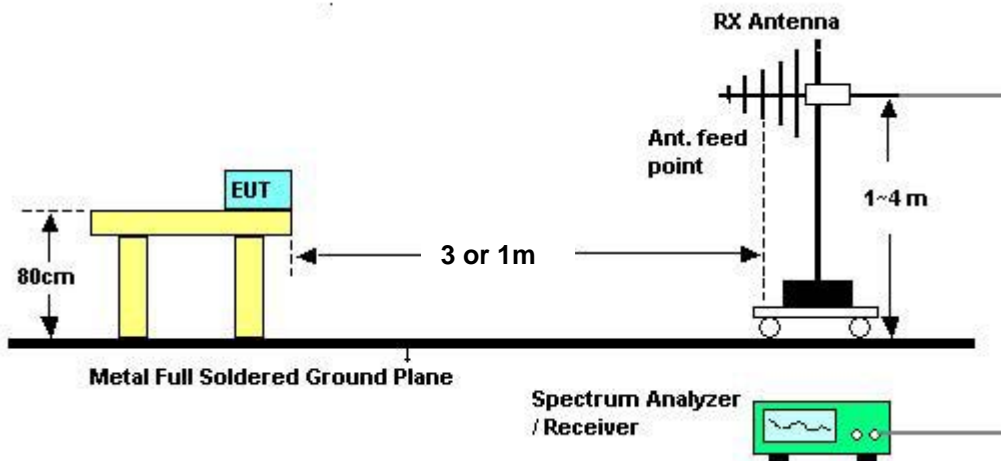

Above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

3.6.5 Test Deviation

There is no deviation with the original standard.

3.6.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

**3.6.7 Results of Radiated Emissions (9kHz~30MHz)**

<b>Final Test Date</b>	Feb. 23 2010	<b>Test Site No.</b>	OS04-LK
<b>Temperature</b>	24	<b>Humidity</b>	56%
<b>Test Engineer</b>	Benny		

<b>Freq. (MHz)</b>	<b>Level (dBuV)</b>	<b>Over Limit (dB)</b>	<b>Limit Line (dBuV)</b>	<b>Remark</b>
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);


Limit line = specific limits (dBuV) + distance extrapolation factor.




**3.6.8 Results of Radiated Emissions (30MHz~1GHz)**

<b>Final Test Date</b>	Feb. 23 2010	<b>Test Site No.</b>	OS04-LK
<b>Temperature</b>	24	<b>Humidity</b>	56%
<b>Test Engineer</b>	Benny	<b>Configuration</b>	POE Mode (Power Supply: POE20U-560(G) -R)

**Horizontal**

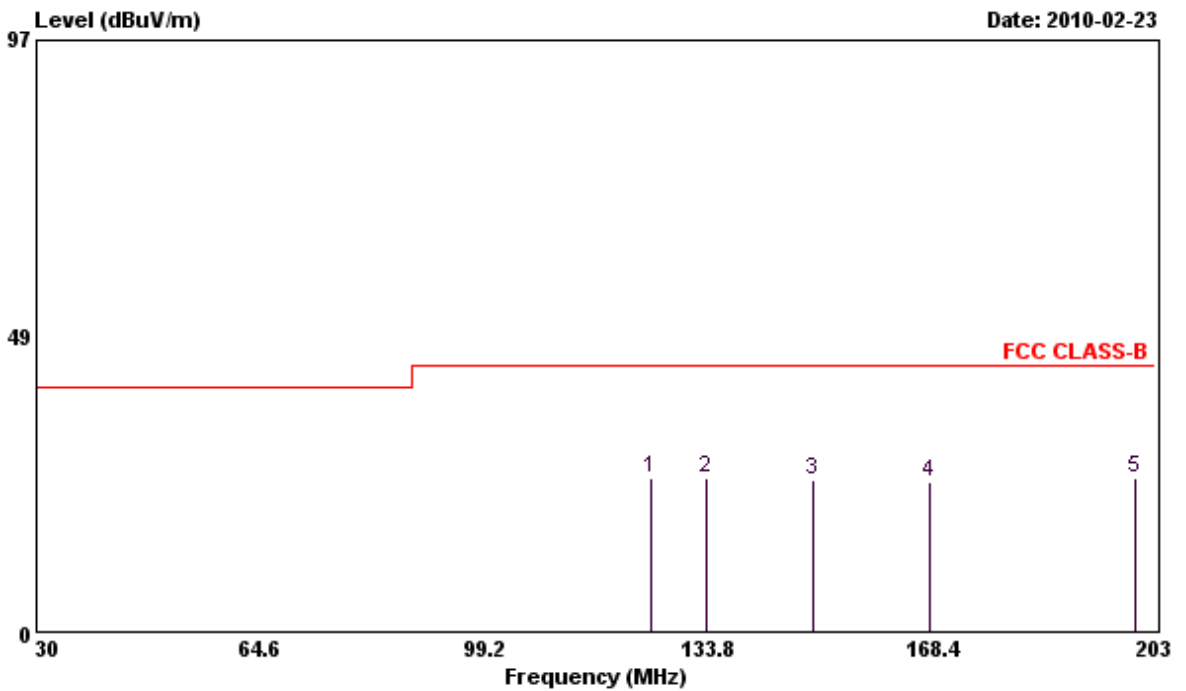


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	125.000	25.33	-18.17	43.50	37.34	11.41	1.58	25.00	Peak	---	---
2	133.630	25.12	-18.38	43.50	37.16	11.29	1.67	25.00	Peak	---	---
3	150.000	24.89	-18.61	43.50	37.10	11.05	1.74	25.00	Peak	---	---
4	168.050	24.64	-18.86	43.50	38.77	9.01	1.86	25.00	Peak	---	---
5	200.000	25.20	-18.30	43.50	39.22	8.95	2.03	25.00	Peak	---	---

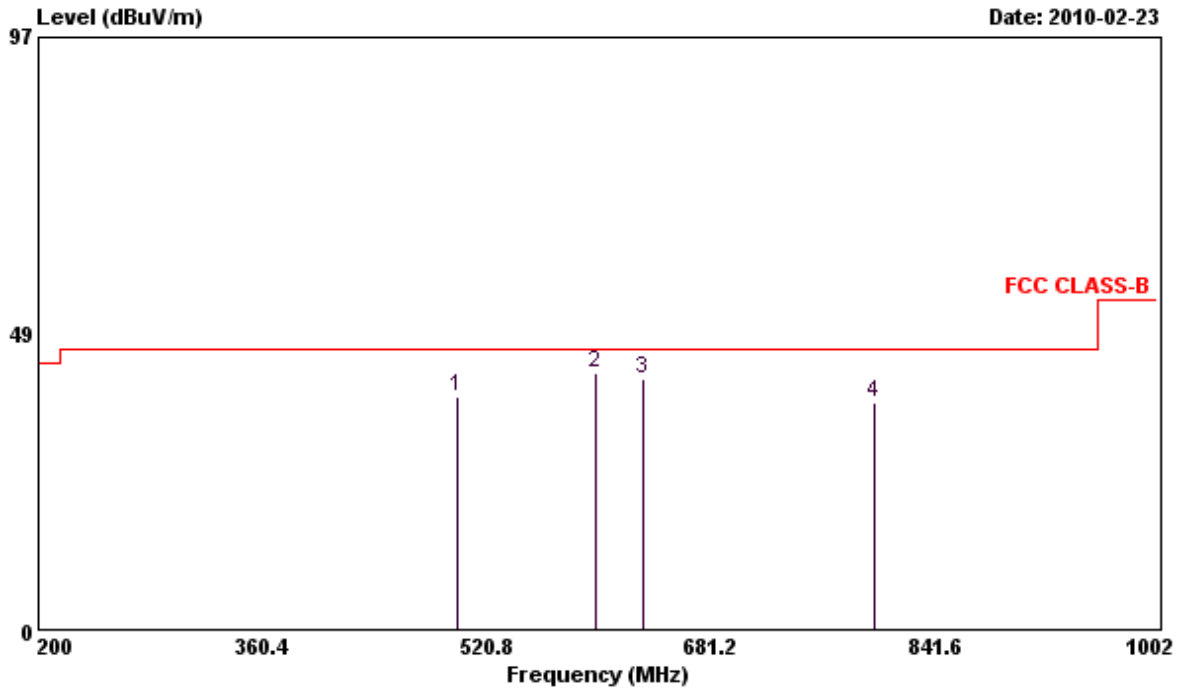


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	500.000	38.18	-7.82	46.00	43.38	16.43	3.37	25.00	Peak	---	---
2	600.000	42.15	-3.85	46.00	45.67	17.72	3.86	25.10	QP	---	---
3	633.300	41.10	-4.90	46.00	44.37	17.88	3.95	25.10	Peak	---	---
4	800.000	37.27	-8.73	46.00	38.80	19.07	4.60	25.20	Peak	---	---

Vertical

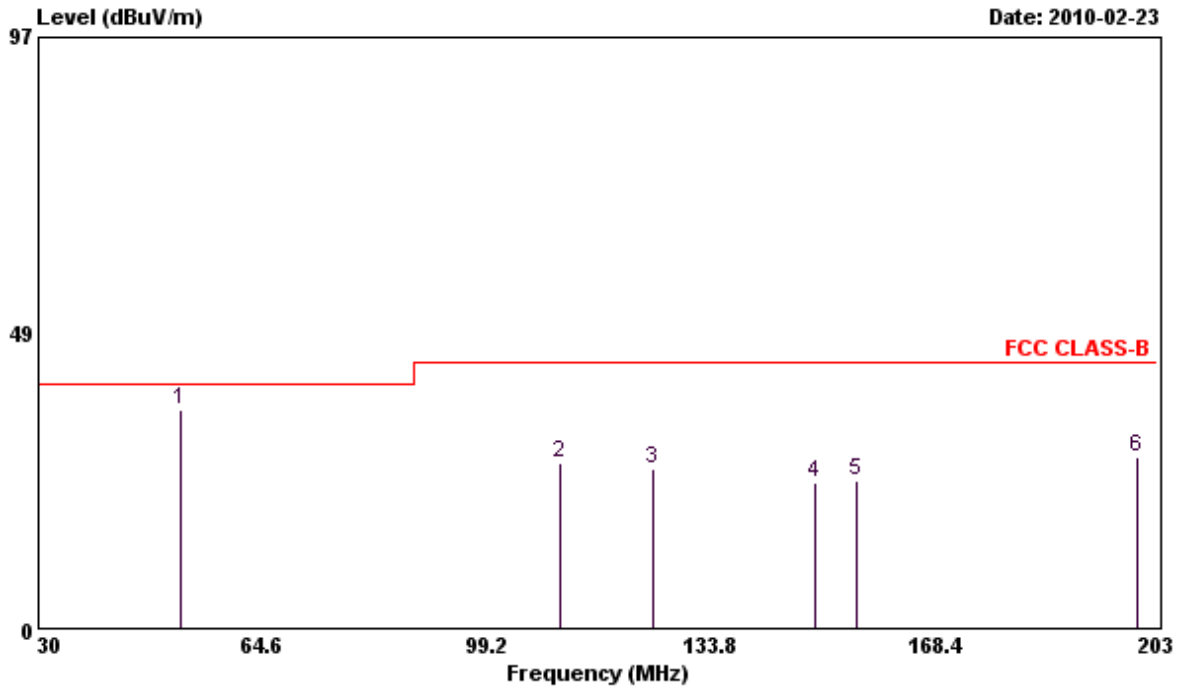

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	52.000	35.94	-4.06	40.00	51.99	7.92	0.93	24.90	Peak	---	---
2	110.620	27.21	-16.29	43.50	39.83	10.90	1.48	25.00	Peak	---	---
3	125.000	26.26	-17.24	43.50	38.27	11.41	1.58	25.00	Peak	---	---
4	150.000	23.89	-19.61	43.50	36.10	11.05	1.74	25.00	Peak	---	---
5	156.600	24.29	-19.21	43.50	37.79	9.71	1.79	25.00	Peak	---	---
6	200.000	28.08	-15.42	43.50	42.10	8.95	2.03	25.00	Peak	---	---

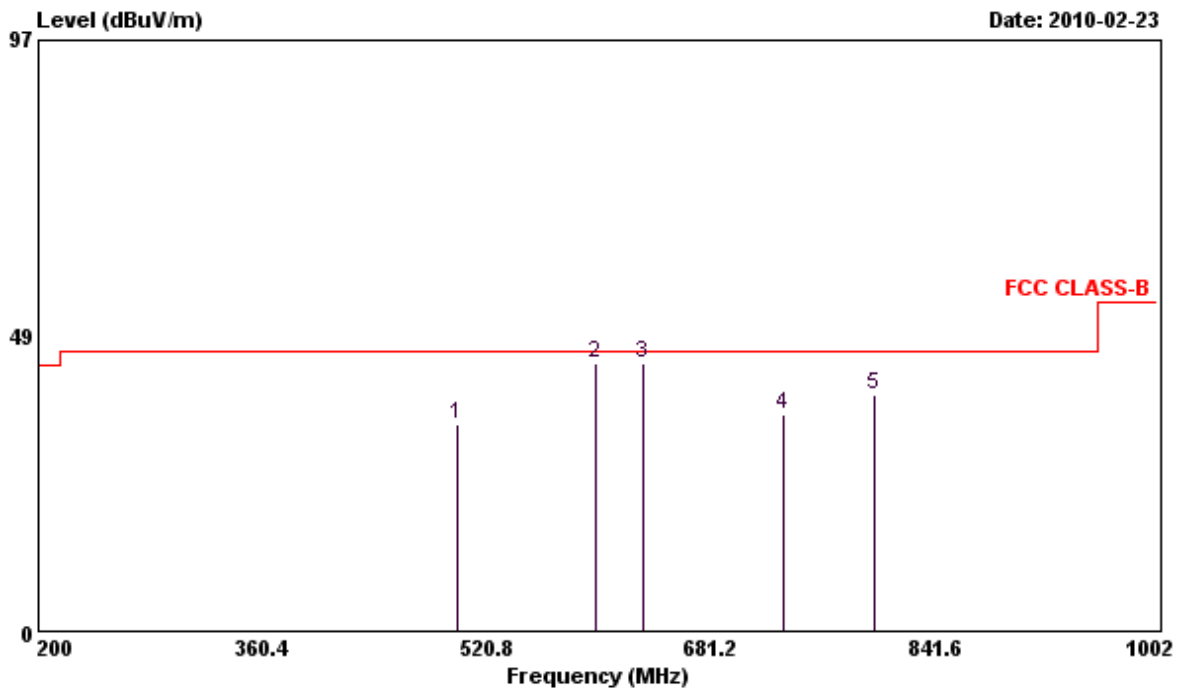

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable	Preamp	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB		cm	deg
1	500.000	33.98	-12.02	46.00	39.18	16.43	3.37	25.00 Peak	---	---
2 @	600.000	44.06	-1.94	46.00	47.58	17.72	3.86	25.10 QP	140	360
3	633.300	43.98	-2.02	46.00	47.25	17.88	3.95	25.10 QP	---	---
4	734.000	35.67	-10.33	46.00	37.99	18.49	4.32	25.13 Peak	---	---
5	800.000	38.72	-7.28	46.00	40.25	19.07	4.60	25.20 Peak	---	---

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

3.6.9 Results for Radiated Emissions (1GHz~40GHz)

For Two Chain:


Final Test Date	Feb. 02, 2010	Test Site No.	03CH02-HY
Temperature	24	Humidity	58%
Test Engineer	Billy	Configuration	802.11a CH 36

Horizontal

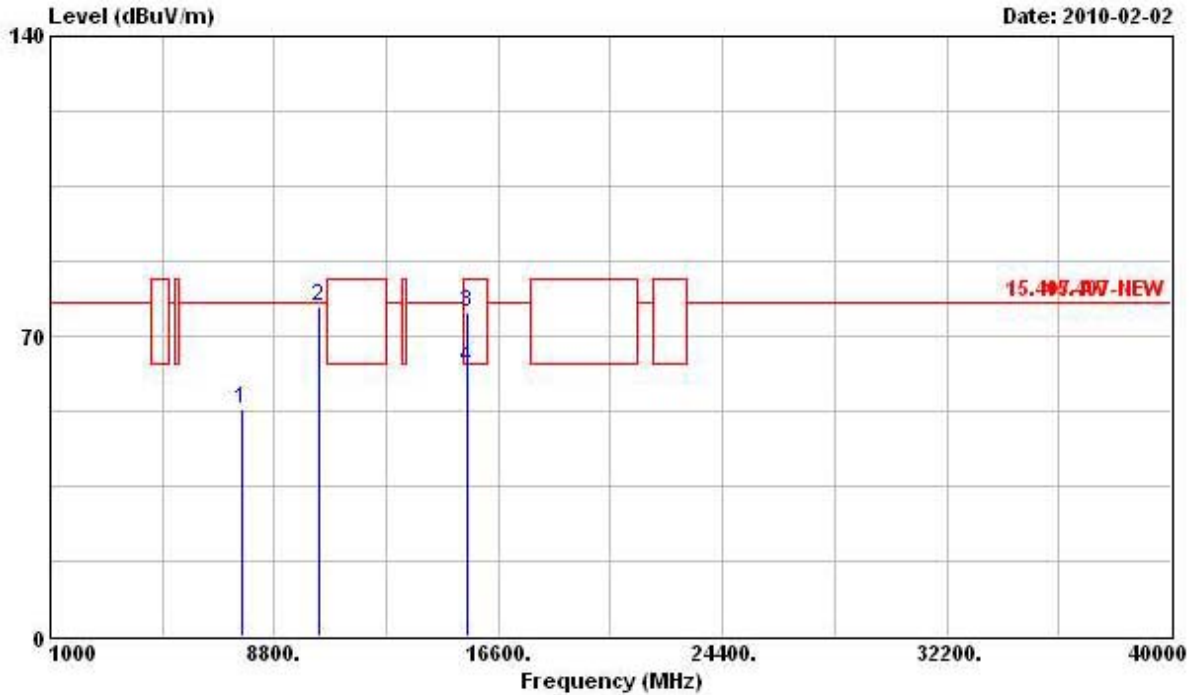

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7650.000	53.18	-24.66	77.84	43.80	37.99	5.71	34.32	Peak
2	10360.000	76.71	-1.13	77.84	64.12	40.02	6.71	34.14	Peak
3	15540.000	75.61	-7.93	83.54	57.19	42.81	8.45	32.84	Peak
4	@15540.000	62.52	-1.02	63.54	44.10	42.81	8.45	32.84	Average


Vertical

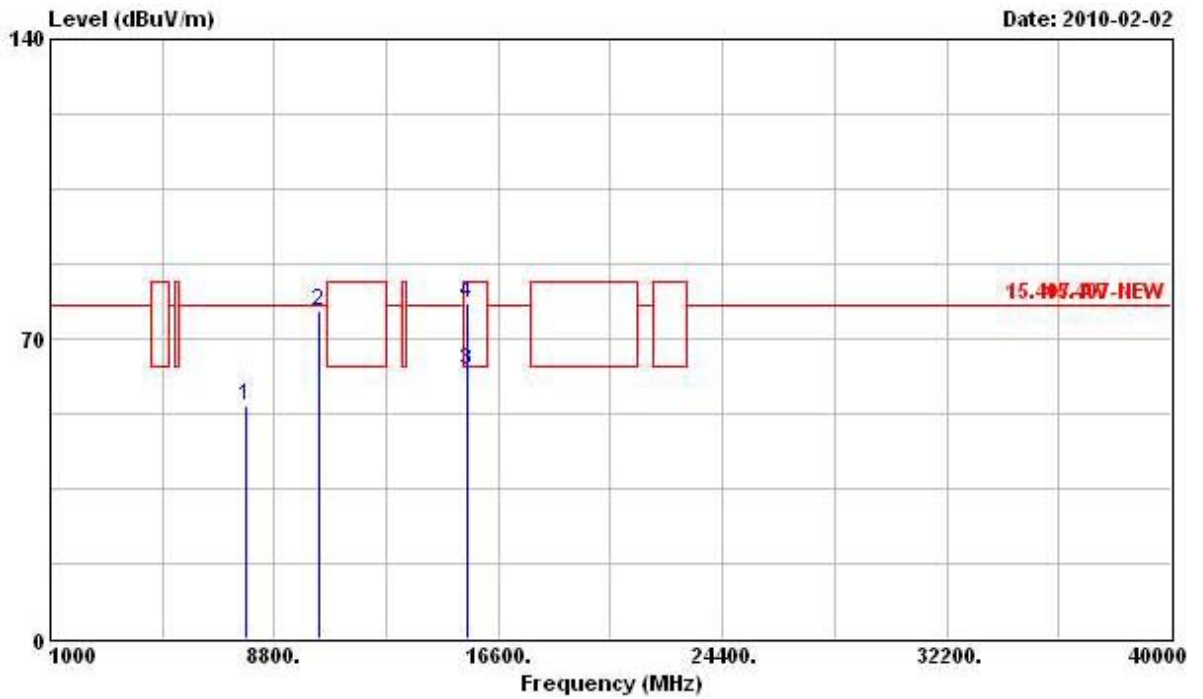

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7776.000	54.41	-23.43	77.84	44.94	38.07	5.74	34.34	Peak
2	10360.000	76.28	-1.56	77.84	63.69	40.02	6.71	34.14	Peak
3	@15540.000	62.42	-1.12	63.54	44.00	42.81	8.45	32.84	Average
4	15540.000	78.09	-5.45	83.54	59.67	42.81	8.45	32.84	Peak


<b>Final Test Date</b>	Feb. 02, 2010	<b>Test Site No.</b>	03CH02-HY
<b>Temperature</b>	24	<b>Humidity</b>	58%
<b>Test Engineer</b>	Billy	<b>Configuration</b>	802.11a CH 40

**Horizontal**

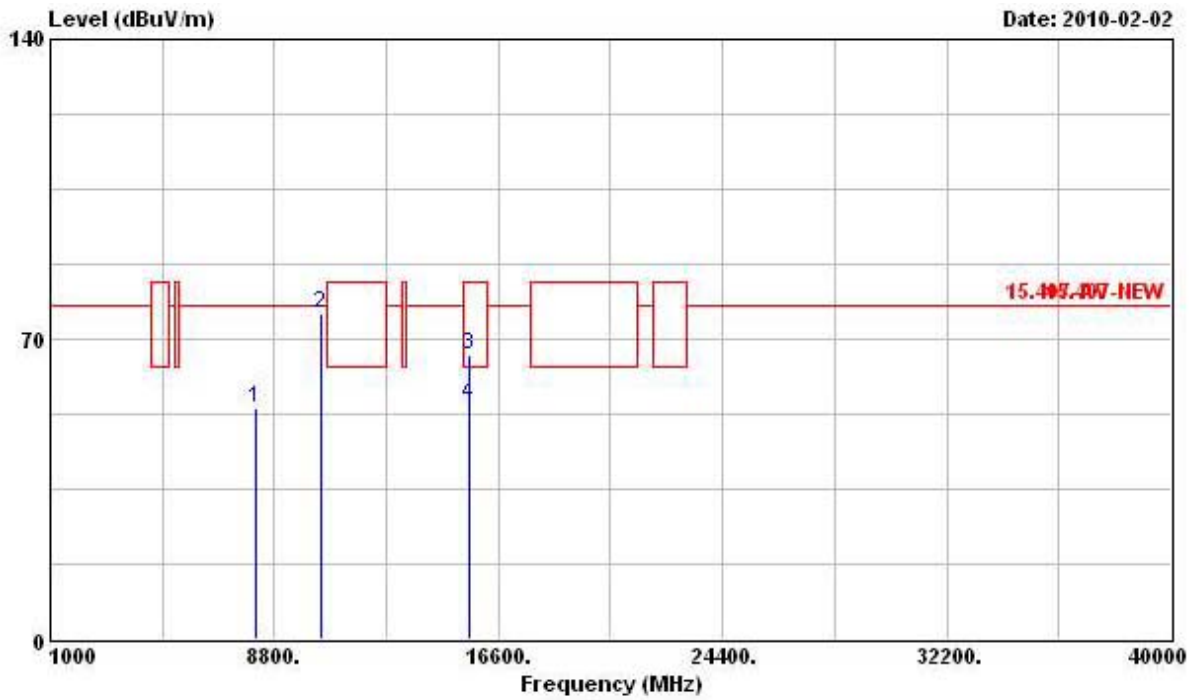

Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB	
1 @ 8177.000	54.02	-23.82	77.84	44.19	38.30	5.85	34.32	Peak
2 @ 10400.000	76.05	-1.79	77.84	63.36	40.04	6.75	34.10	Peak
3 @ 15602.000	66.49	-17.05	83.54	48.14	42.82	8.45	32.92	Peak
4 @ 15602.000	54.61	-8.93	63.54	36.26	42.82	8.45	32.92	Average

Vertical

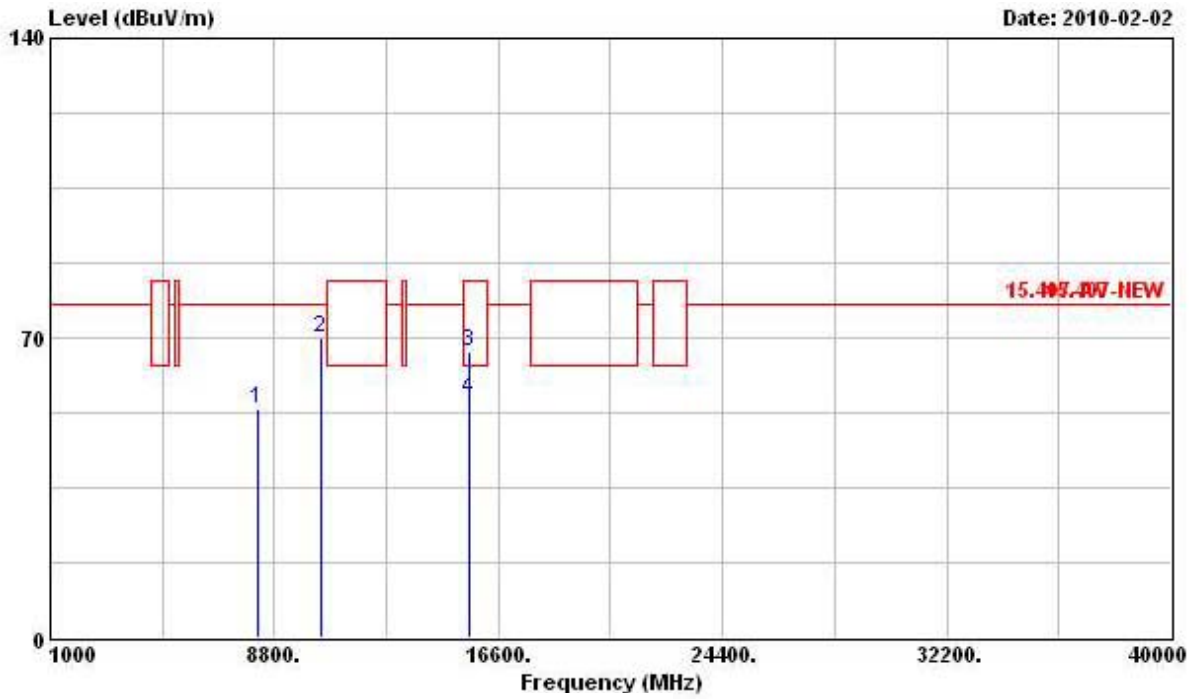


Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @ 8254.000	53.37	-24.47	77.84	43.42	38.36	5.88	34.29	Peak
2 @ 10400.000	70.02	-7.82	77.84	57.33	40.04	6.75	34.10	Peak
3 @ 15600.000	66.68	-16.86	83.54	48.33	42.82	8.45	32.92	Peak
4 @ 15600.000	55.72	-7.82	63.54	37.37	42.82	8.45	32.92	Average




<b>Final Test Date</b>	Feb. 02, 2010	<b>Test Site No.</b>	03CH02-HY
<b>Temperature</b>	24	<b>Humidity</b>	58%
<b>Test Engineer</b>	Billy	<b>Configuration</b>	802.11a CH 48

**Horizontal**

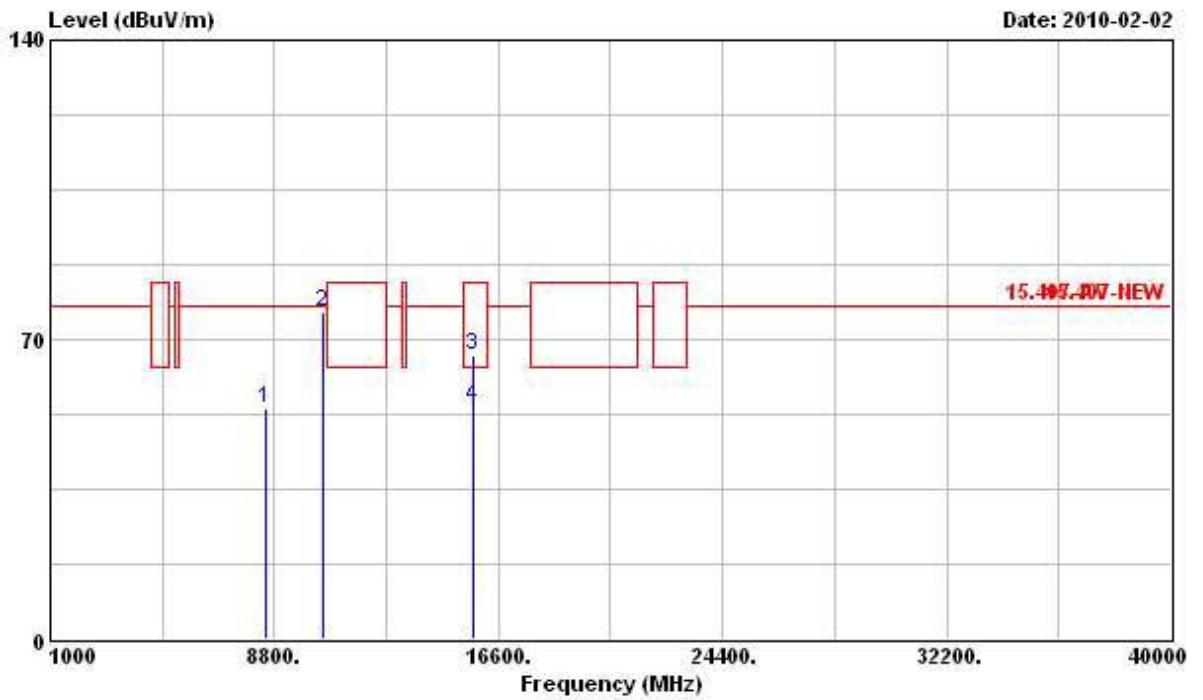

Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @ 8529.000	53.88	-23.96	77.84	43.68	38.47	5.96	34.23	Peak
2 @ 10480.000	76.43	-1.41	77.84	63.55	40.09	6.82	34.03	Peak
3 @ 15720.000	66.35	-17.19	83.54	48.08	42.84	8.46	33.03	Peak
4 @ 15720.000	54.25	-9.29	63.54	35.98	42.84	8.46	33.03	Average


Vertical

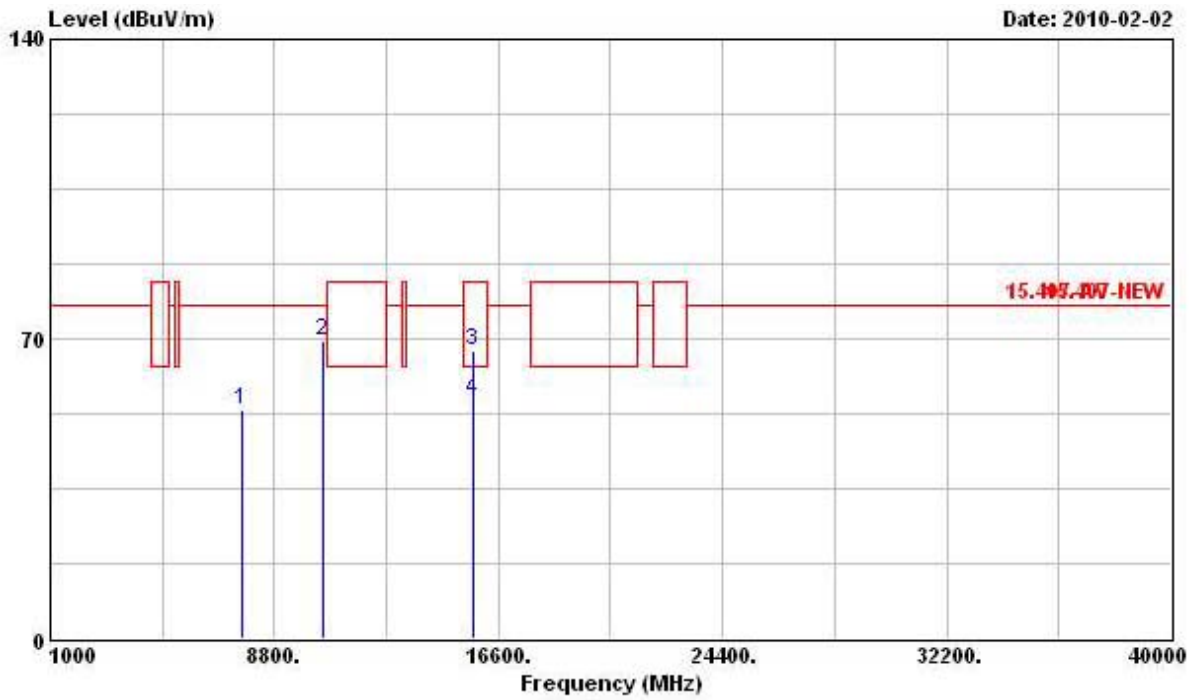

Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @ 7649.000	53.64	-24.20	77.84	44.28	37.99	5.69	34.32	Peak
2 @ 10480.000	69.50	-8.34	77.84	56.62	40.09	6.82	34.03	Peak
3 @ 15720.000	67.04	-16.50	83.54	48.77	42.84	8.46	33.03	Peak
4 @ 15720.000	55.74	-7.80	63.54	37.47	42.84	8.46	33.03	Average


Final Test Date	Feb. 02, 2010	Test Site No.	03CH02-HY
Temperature	24	Humidity	58%
Test Engineer	Billy	Configuration	802.11n CH 36 (20MHz)

Horizontal

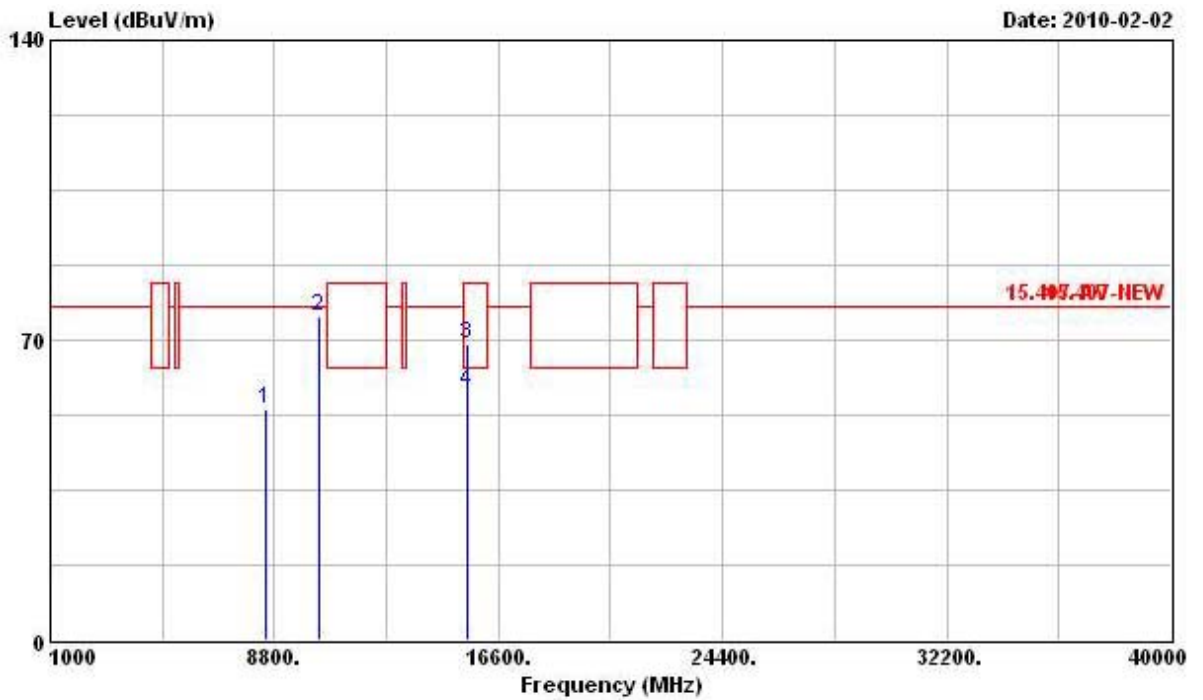

Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @ 8518.000	54.02	-23.82	77.84	43.80	38.49	5.96	34.23	Peak
2 @ 10360.000	75.49	-2.35	77.84	62.90	40.02	6.71	34.14	Peak
3 @ 15540.000	69.02	-14.52	83.54	50.60	42.81	8.45	32.84	Peak
4 @ 15540.000	57.91	-5.63	63.54	39.49	42.81	8.45	32.84	Average


Vertical

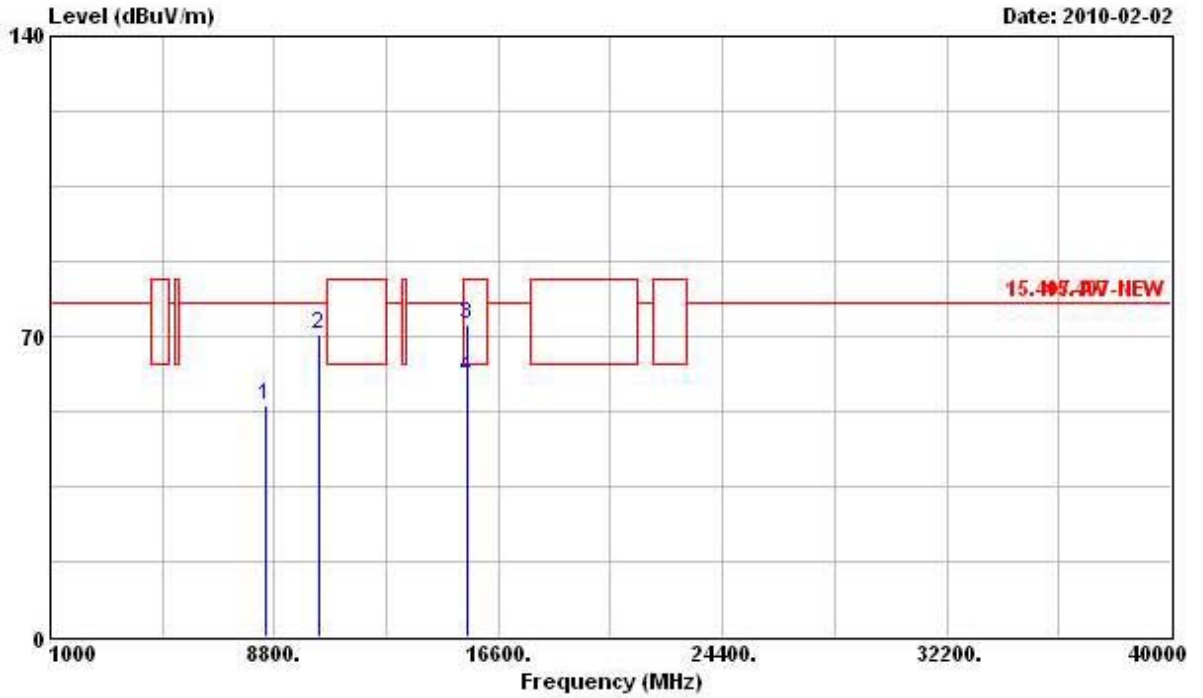

Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @ 8485.000	53.74	-24.10	77.84	43.51	38.49	5.94	34.20	Peak
2 @ 10360.000	70.60	-7.24	77.84	58.01	40.02	6.71	34.14	Peak
3 @ 15540.000	72.87	-10.67	83.54	54.45	42.81	8.45	32.84	Peak
4 @ 15540.000	60.19	-3.35	63.54	41.77	42.81	8.45	32.84	Average


<b>Final Test Date</b>	Feb. 02, 2010	<b>Test Site No.</b>	03CH02-HY
<b>Temperature</b>	24	<b>Humidity</b>	58%
<b>Test Engineer</b>	Billy	<b>Configuration</b>	802.11n CH 40 (20MHz)

**Horizontal**

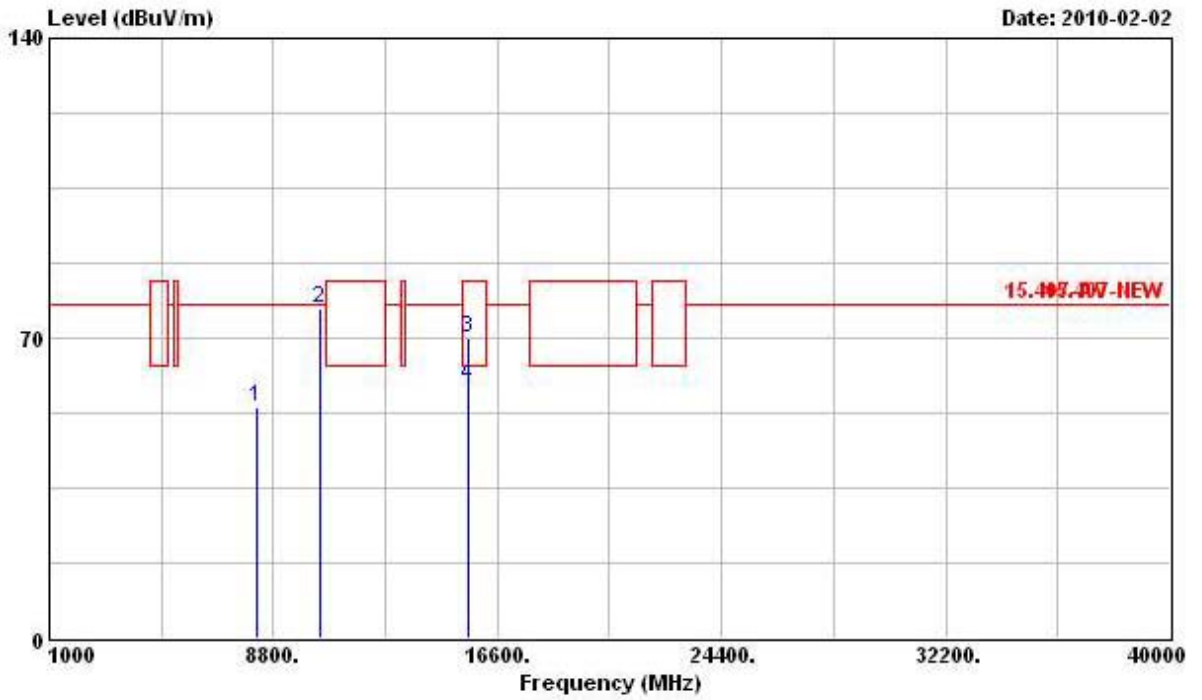

Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB	
1 @ 8210.000	53.80	-24.04	77.84	43.92	38.32	5.86	34.30	Peak
2 @ 10400.000	76.74	-1.10	77.84	64.05	40.04	6.75	34.10	Peak
3 @ 15600.000	69.88	-13.66	83.54	51.53	42.82	8.45	32.92	Peak
4 @ 15600.000	59.13	-4.41	63.54	40.78	42.82	8.45	32.92	Average


Vertical

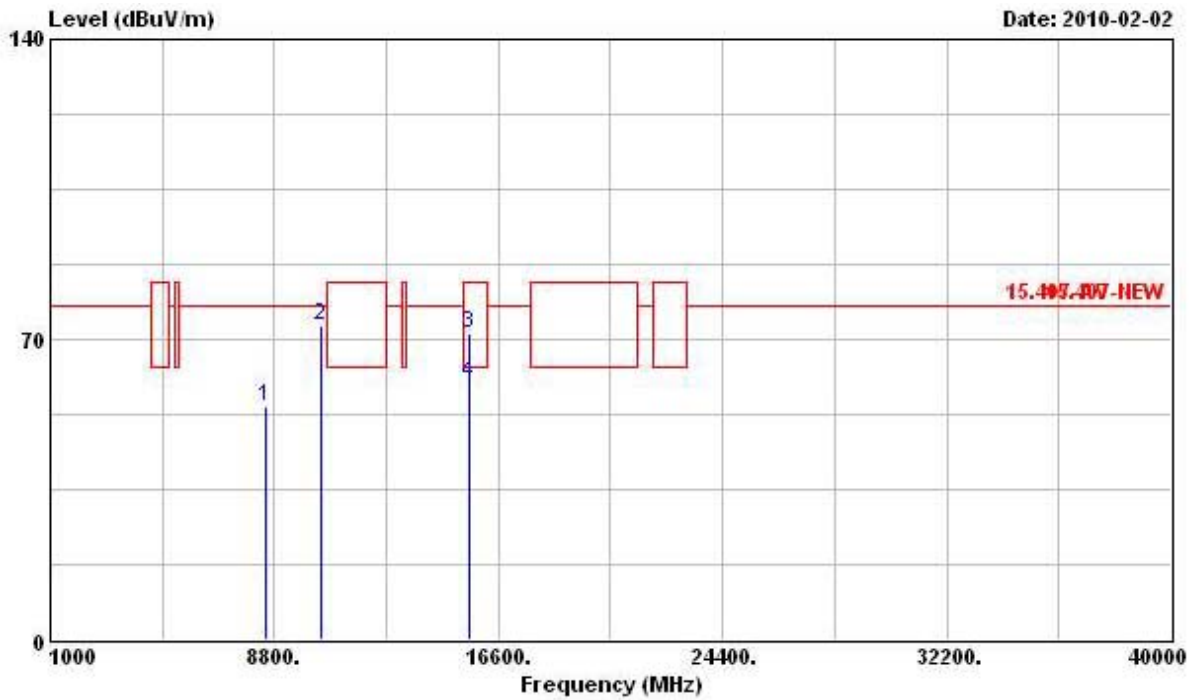

Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @ 8518.000	54.50	-23.34	77.84	44.28	38.49	5.96	34.23	Peak
2 @ 10400.000	73.10	-4.74	77.84	60.41	40.04	6.75	34.10	Peak
3 @ 15600.000	71.36	-12.18	83.54	53.01	42.82	8.45	32.92	Peak
4 @ 15600.000	59.84	-3.70	63.54	41.49	42.82	8.45	32.92	Average


<b>Final Test Date</b>	Feb. 02, 2010	<b>Test Site No.</b>	03CH02-HY
<b>Temperature</b>	24	<b>Humidity</b>	58%
<b>Test Engineer</b>	Billy	<b>Configuration</b>	802.11n CH 48 (20MHz)

**Horizontal**

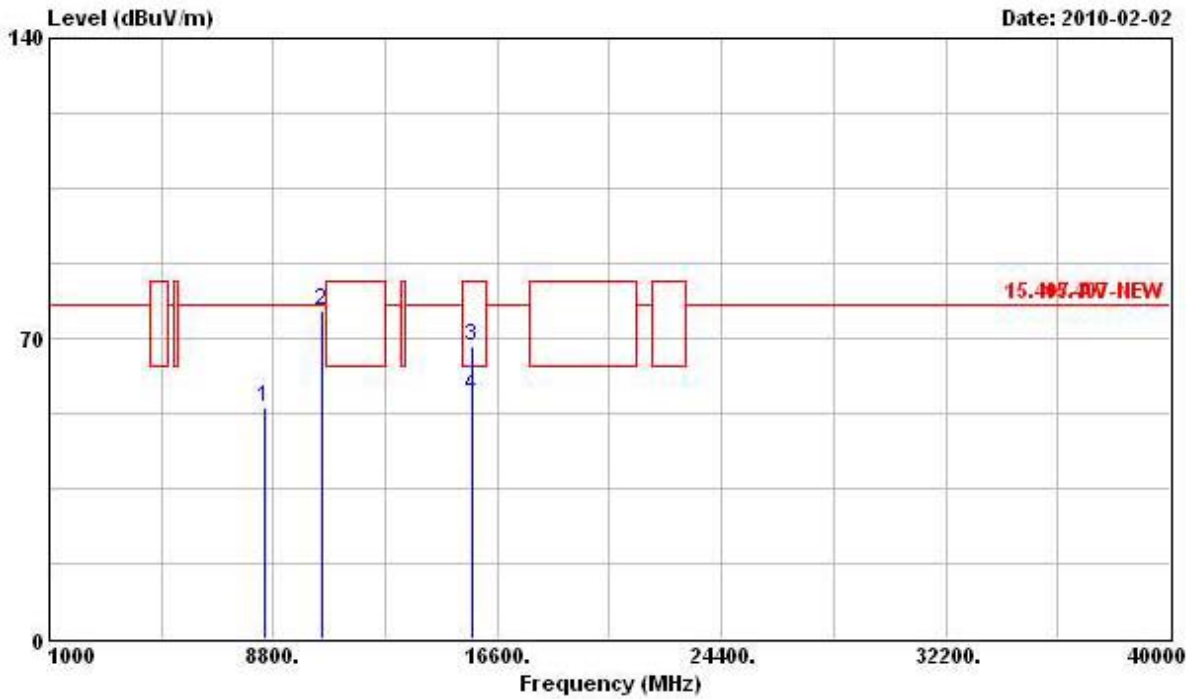

Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @ 8485.000	53.92	-23.92	77.84	43.69	38.49	5.94	34.20	Peak
2 @ 10480.000	76.56	-1.28	77.84	63.68	40.09	6.82	34.03	Peak
3 @ 15720.000	68.21	-15.33	83.54	49.94	42.84	8.46	33.03	Peak
4 @ 15720.000	56.56	-6.98	63.54	38.29	42.84	8.46	33.03	Average

Vertical

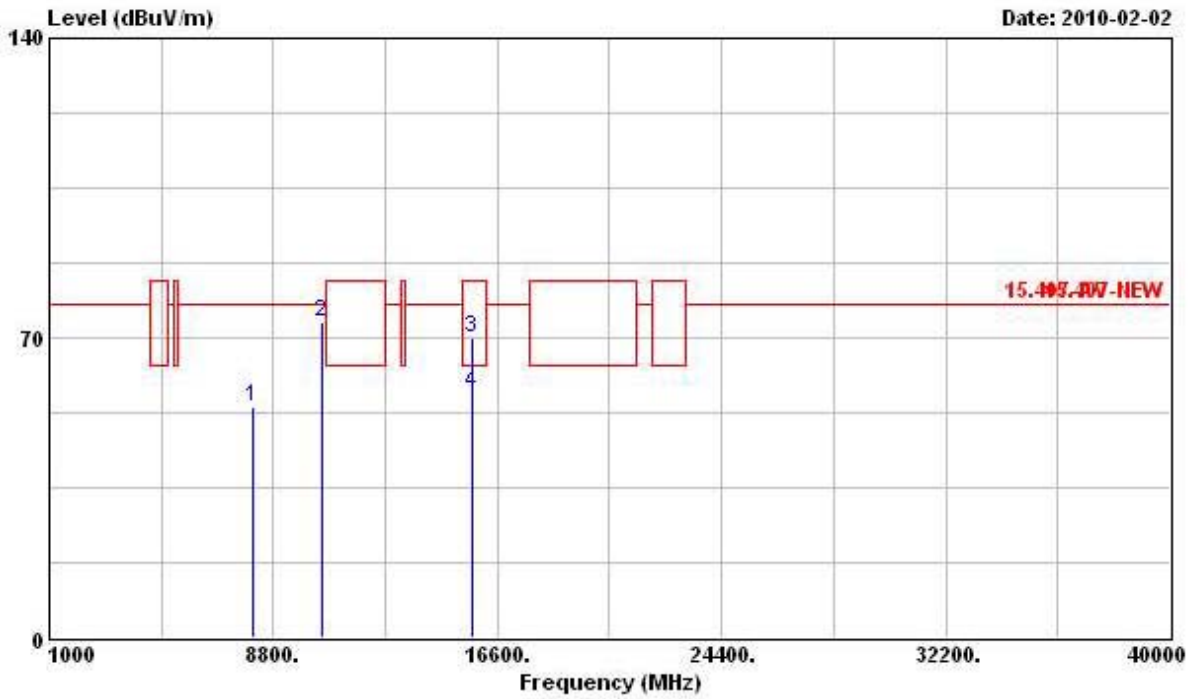


Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @ 8089.000	53.73	-24.11	77.84	43.99	38.25	5.83	34.34	Peak
2 @ 10480.000	73.81	-4.03	77.84	60.93	40.09	6.82	34.03	Peak
3 @ 15720.000	70.04	-13.50	83.54	51.77	42.84	8.46	33.03	Peak
4 @ 15720.000	57.16	-6.38	63.54	38.89	42.84	8.46	33.03	Average




Final Test Date	Feb. 02, 2010	Test Site No.	03CH02-HY
Temperature	24	Humidity	58%
Test Engineer	Billy	Configuration	802.11n CH 38 (40MHz)

Horizontal

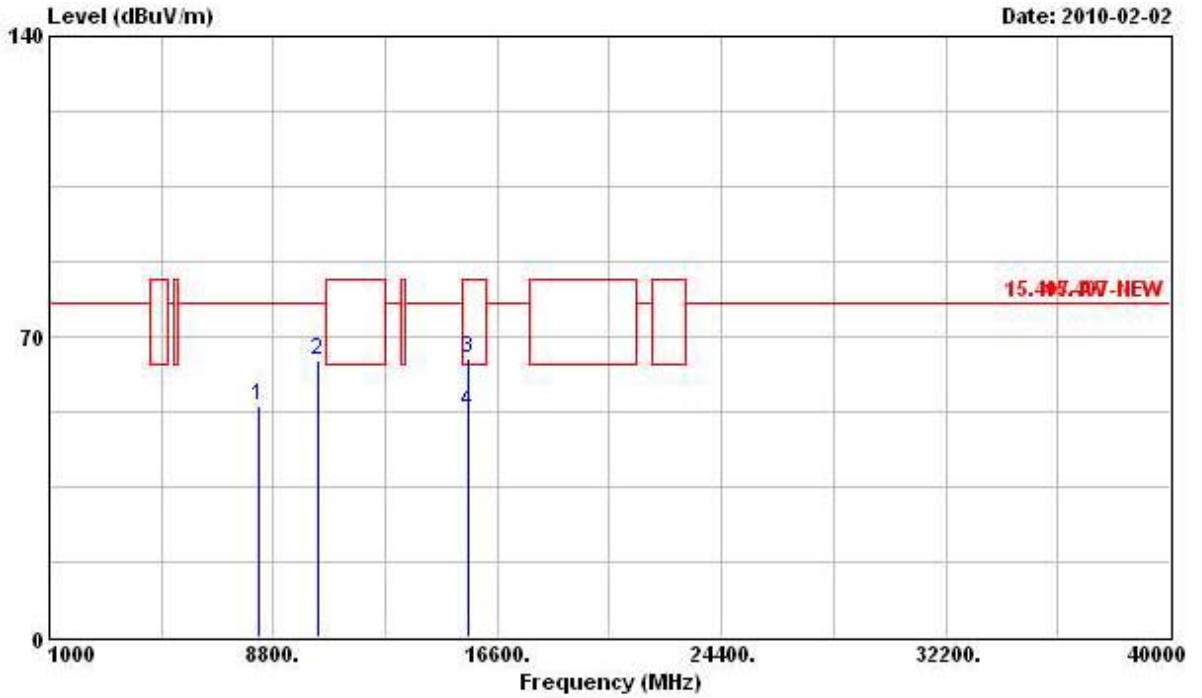

Freq	Level	Over Limit	Limit	ReadAntenna	Cable	Preamp	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1 @ 8309.000	53.79	-24.05	77.84	43.77	38.39	5.89	34.26 PK
2 @ 10380.000	64.32	-13.52	77.84	51.66	40.03	6.75	34.12 Peak
3 @ 15570.000	64.99	-18.55	83.54	46.60	42.81	8.45	32.87 Peak
4 @ 15570.000	52.38	-11.16	63.54	33.99	42.81	8.45	32.87 Average


Vertical

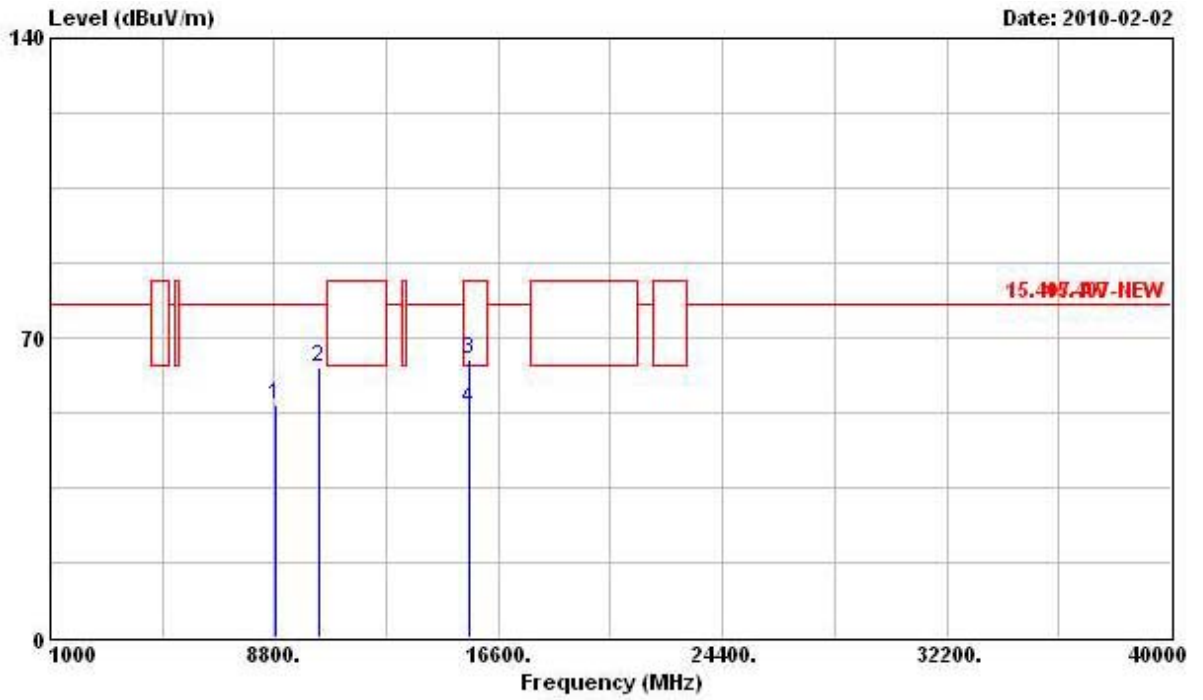

Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable	Preamp	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1 @ 8870.000	54.15	-23.69	77.84	44.43	38.21	6.11	34.60 Peak
2 @ 10380.000	62.95	-14.89	77.84	50.29	40.03	6.75	34.12 Peak
3 @ 15570.000	64.99	-18.55	83.54	46.60	42.81	8.45	32.87 Peak
4 @ 15570.000	53.24	-10.30	63.54	34.85	42.81	8.45	32.87 Average


Final Test Date	Feb. 24, 2010	Test Site No.	03CH02-HY
Temperature	24	Humidity	58%
Test Engineer	Billy	Configuration	802.11n CH 46 (40MHz)

Horizontal

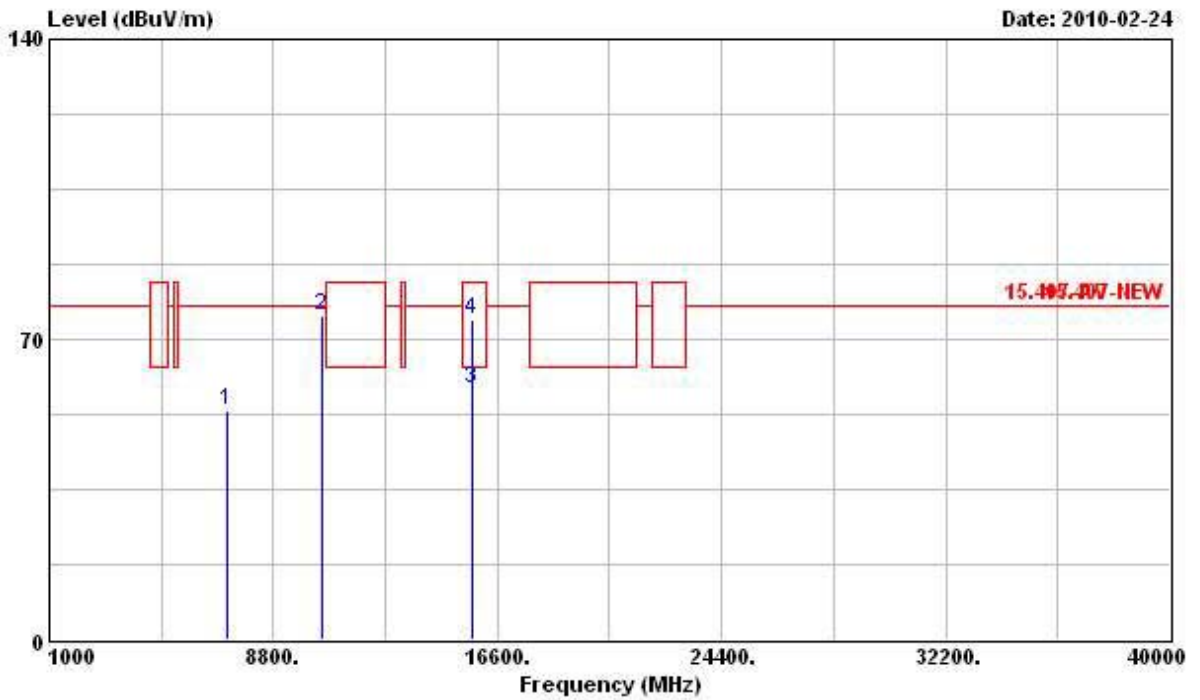

Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB	
1 7198.000	53.58	-24.26	77.84	44.41	37.84	5.62	34.29	Peak
2 @10460.000	75.62	-2.22	77.84	62.78	40.07	6.82	34.05	Peak
3 @15690.000	58.49	-5.05	63.54	40.19	42.84	8.46	33.00	Average
4 15690.000	74.51	-9.03	83.54	56.21	42.84	8.46	33.00	Peak

Vertical

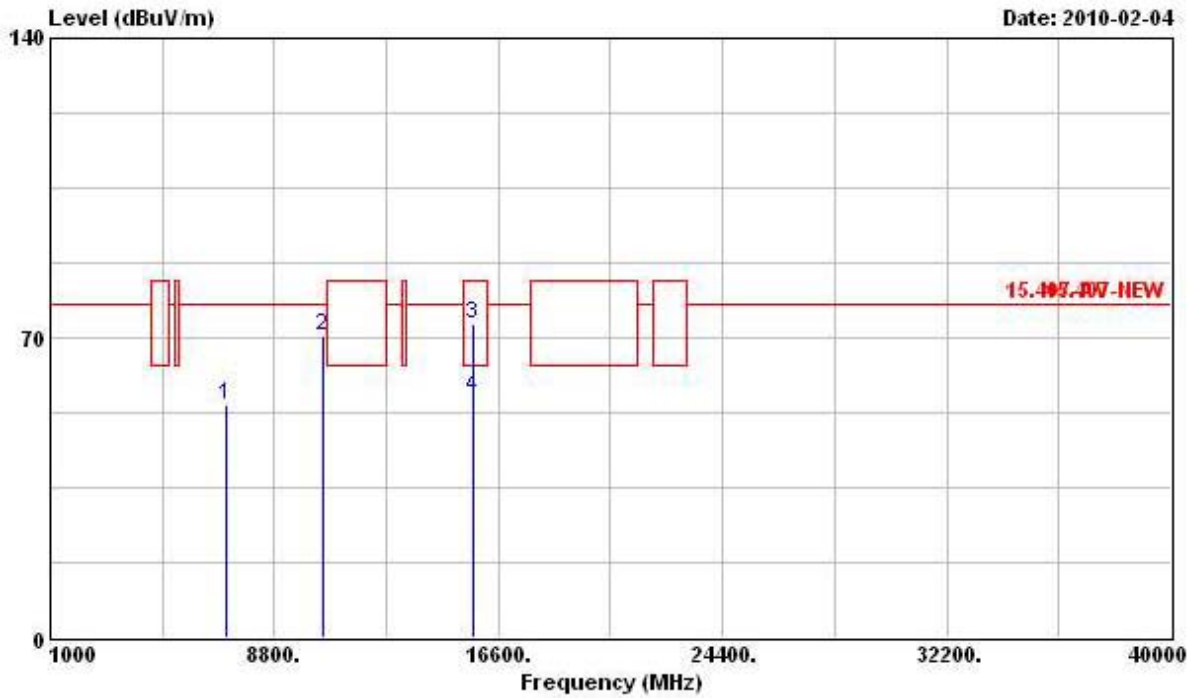

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7132.000	54.22	-23.62	77.84	45.06	37.83	5.61	34.28	Peak
2	@10460.000	70.49	-7.35	77.84	57.65	40.07	6.82	34.05	Peak
3	15690.000	73.20	-10.34	83.54	54.90	42.84	8.46	33.00	Peak
4	15690.000	55.99	-7.55	63.54	37.69	42.84	8.46	33.00	Average

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade form 3m to 1m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

**3.7 Band Edge and Fundamental Emissions Measurement**

**3.7.1 Limit**

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz (78.3dBuV/m at 3m); for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

<b>Frequencies (MHz)</b>	<b>Field Strength (micorvolts/meter)</b>	<b>Measurement Distance (meters)</b>
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

**3.7.2 Measuring Instruments and Setting**

Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

<b>Spectrum Parameter</b>	<b>Setting</b>
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak

**3.7.3 Test Procedures**

1. The test procedure is the same as section 3.6.3, only the frequency range investigated is limited to 100MHz around band edges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

**3.7.4 Test Setup Layout**

This test setup layout is the same as that shown in section 3.6.4.

**3.7.5 Test Deviation**

There is no deviation with the original standard.

**3.7.6 EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

**3.7.7 Test Result of Band Edge and Fundamental Emissions**

<b>Final Test Date</b>	Feb. 03, 2010	<b>Test Site No.</b>	03CH02-HY
<b>Temperature</b>	24	<b>Humidity</b>	58%
<b>Test Engineer</b>	Billy	<b>Configuration</b>	802.11a CH 36, 40, 48

For Two Chain:

**Chanel 36**

	<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>ReadAntenna Level</b>	<b>Antenna Factor</b>	<b>Cable Loss</b>	<b>Preamp Factor</b>	<b>Remark</b>
	<b>MHz</b>	<b>dBuV/m</b>	<b>dB</b>	<b>dBuV/m</b>	<b>dBuV</b>	<b>dB/m</b>	<b>dB</b>	<b>dB</b>	
1 @	5149.240	82.22	-1.32	83.54	41.23	36.21	4.78	0.00	Peak
2 @	5177.620	123.38			82.32	36.26	4.80	0.00	Peak
1 @	5149.900	62.14	-1.40	63.54	21.15	36.21	4.78	0.00	Average
2 @	5178.280	112.21			71.15	36.26	4.80	0.00	Average

An item 2 is Fundamental Emissions.

**Channel 40**

	<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>ReadAntenna Level</b>	<b>Antenna Factor</b>	<b>Cable Loss</b>	<b>Preamp Factor</b>	<b>Remark</b>
	<b>MHz</b>	<b>dBuV/m</b>	<b>dB</b>	<b>dBuV/m</b>	<b>dBuV</b>	<b>dB/m</b>	<b>dB</b>	<b>dB</b>	
1 @	5140.440	72.25	-11.29	83.54	31.26	36.21	4.78	0.00	Peak
2 @	5197.640	119.51			78.42	36.28	4.81	0.00	Peak
1 @	5146.820	59.01	-4.53	63.54	18.02	36.21	4.78	0.00	Average
2 @	5198.520	108.80			67.71	36.28	4.81	0.00	Average

An item 2 is Fundamental Emissions.

**Channel 48**

	<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>ReadAntenna Level</b>	<b>Antenna Factor</b>	<b>Cable Loss</b>	<b>Preamp Factor</b>	<b>Remark</b>
	<b>MHz</b>	<b>dBuV/m</b>	<b>dB</b>	<b>dBuV/m</b>	<b>dBuV</b>	<b>dB/m</b>	<b>dB</b>	<b>dB</b>	
1 @	5243.620	119.85			78.68	36.35	4.82	0.00	Peak
2 @	5359.560	72.41	-11.13	83.54	31.05	36.49	4.87	0.00	Peak
1 @	5236.360	108.46			67.31	36.33	4.82	0.00	Average
2 @	5357.140	59.38	-4.16	63.54	18.02	36.49	4.87	0.00	Average

An item 1 is Fundamental Emissions.

<b>Final Test Date</b>	Feb. 04, 2010	<b>Test Site No.</b>	03CH02-HY
<b>Temperature</b>	24	<b>Humidity</b>	58%
<b>Test Engineer</b>	Billy	<b>Configuration</b>	802.11n CH 36, 40, 48 (20MHz)

**Channel 36**

	<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>ReadAntenna Level</b>	<b>Antenna Factor</b>	<b>Cable Loss</b>	<b>Preamp Factor</b>	<b>Remark</b>
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @	5243.620	119.85			78.68	36.35	4.82	0.00	Peak
2 @	5359.560	72.41	-11.13	83.54	31.05	36.49	4.87	0.00	Peak
1 @	5236.360	108.46			67.31	36.33	4.82	0.00	Average
2 @	5357.140	59.38	-4.16	63.54	18.02	36.49	4.87	0.00	Average

An item 1 is Fundamental Emissions.

**Channel 40**

	<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>ReadAntenna Level</b>	<b>Antenna Factor</b>	<b>Cable Loss</b>	<b>Preamp Factor</b>	<b>Remark</b>
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @	5149.240	72.95	-10.59	83.54	31.96	36.21	4.78	0.00	Peak
2 @	5201.380	108.62			67.53	36.28	4.81	0.00	Peak
1 @	5146.600	59.81	-3.73	63.54	18.82	36.21	4.78	0.00	Average
2 @	5201.380	96.07			54.98	36.28	4.81	0.00	Average

An item 2 is Fundamental Emissions.

**Channel 48**

	<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>ReadAntenna Level</b>	<b>Antenna Factor</b>	<b>Cable Loss</b>	<b>Preamp Factor</b>	<b>Remark</b>
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @	5145.940	72.63	-10.91	83.54	31.64	36.21	4.78	0.00	Peak
2 @	5243.620	107.78			66.61	36.35	4.82	0.00	Peak
1 @	5140.000	59.79	-3.75	63.54	18.80	36.21	4.78	0.00	Average
2 @	5241.860	96.26			55.09	36.35	4.82	0.00	Average

An item 2 is Fundamental Emissions.

<b>Final Test Date</b>	Feb. 04, 2010	<b>Test Site No.</b>	03CH02-HY
<b>Temperature</b>	24	<b>Humidity</b>	58%
<b>Test Engineer</b>	Billy	<b>Configuration</b>	802.11n CH 38, 46 (40MHz)

**Channel 38**

	<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>ReadAntenna Level</b>	<b>Antenna Factor</b>	<b>Cable Loss</b>	<b>Preamp Factor</b>	<b>Remark</b>
	<b>MHz</b>	<b>dBuV/m</b>	<b>dB</b>	<b>dBuV/m</b>	<b>dBuV</b>	<b>dB/m</b>	<b>dB</b>	<b>dB</b>	
1 @	5142.420	72.76	-10.78	83.54	31.77	36.21	4.78	0.00	Peak
2 @	5206.440	100.46			59.37	36.28	4.81	0.00	Peak
1 @	5143.080	59.82	-3.72	63.54	18.83	36.21	4.78	0.00	Average
2 @	5181.800	88.59			47.53	36.26	4.80	0.00	Average

An item 2 is Fundamental Emissions.

**Channel 46**

	<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>ReadAntenna Level</b>	<b>Antenna Factor</b>	<b>Cable Loss</b>	<b>Preamp Factor</b>	<b>Remark</b>
	<b>MHz</b>	<b>dBuV/m</b>	<b>dB</b>	<b>dBuV/m</b>	<b>dBuV</b>	<b>dB/m</b>	<b>dB</b>	<b>dB</b>	
1 @	5149.240	73.40	-10.14	83.54	32.41	36.21	4.78	0.00	Peak
2 @	5215.240	106.15			65.04	36.30	4.81	0.00	Peak
1 @	5147.700	59.80	-3.74	63.54	18.81	36.21	4.78	0.00	Average
2 @	5222.500	93.74			52.63	36.30	4.81	0.00	Average

An item 2 is Fundamental Emissions.

**Note:**

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade form 3m to 1m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].



**3.8 Frequency Stability Measurement**

**3.8.1 Limit**

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emissions is maintained within the band of operation under all conditions of normal operation as specified in the user’s manual or ±20ppm (IEEE 802.11a specification).

**3.8.2 Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RB	10 kHz
VB	10 kHz
Sweep Time	Auto

**3.8.3 Test Procedures**

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. fc is declaring of channel frequency. Then the frequency error formula is  $(f_c - f) / f_c \times 10^6$  ppm and the limit is less than ±20ppm (IEEE 802.11a specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature rule is -30°C~50°C.

**3.8.4 Test Setup Layout**

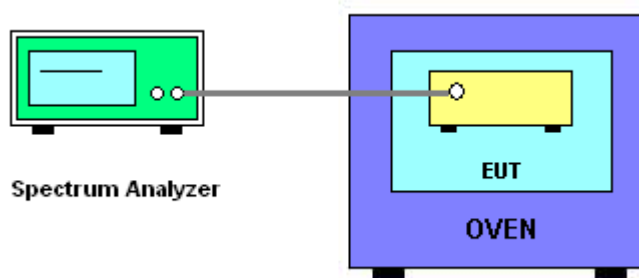

**3.8.5 Test Deviation**

There is no deviation with the original standard.

**3.8.6 EUT Operation during Test**

The EUT was programmed to be in continuously un-modulation transmitting mode.

**3.8.7 Test Result of Frequency Stability**

**Voltage vs. Frequency Stability**

**For Two Chain**

<b>Voltage</b>	<b>Measurement Frequency (MHz)</b>
<b>(V)</b>	<b>IEEE 802.11a 5180</b>
<b>126.5</b>	5180.051700
<b>110</b>	5180.053320
<b>93.5</b>	5180.058763
<b>Max. Deviation (MHz)</b>	0.058763
<b>Max. Deviation (ppm)</b>	11.34

**Temperature vs. Frequency Stability**

<b>Temperature</b>	<b>Measurement Frequency (MHz)</b>
<b>( )</b>	<b>IEEE 802.11a 5180</b>
<b>-20</b>	5180.048944
<b>-10</b>	5180.034895
<b>0</b>	5180.023540
<b>10</b>	5180.043430
<b>20</b>	5180.053320
<b>30</b>	5180.053776
<b>40</b>	5180.044232
<b>50</b>	5180.044162
<b>Max. Deviation (MHz)</b>	0.053776
<b>Max. Deviation (ppm)</b>	10.38

<b>Voltage</b>	<b>Measurement Frequency (MHz)</b>
<b>(V)</b>	<b>IEEE 802.11n 5190 (40MHz)</b>
<b>126.5</b>	5189.999819
<b>110</b>	5189.999996
<b>93.5</b>	5189.999832
<b>Max. Deviation (MHz)</b>	0.000181
<b>Max. Deviation (ppm)</b>	0.03

**Temperature vs. Frequency Stability**

<b>Temperature</b>	<b>Measurement Frequency (MHz)</b>
<b>( )</b>	<b>IEEE 802.11n 5190 (40MHz)</b>
<b>-20</b>	5189.999413
<b>-10</b>	5189.999157
<b>0</b>	5189.999543
<b>10</b>	5189.999313
<b>20</b>	5189.999996
<b>30</b>	5189.999370
<b>40</b>	5189.998744
<b>50</b>	5189.998159
<b>Max. Deviation (MHz)</b>	0.001841
<b>Max. Deviation (ppm)</b>	0.35

### **3.9 Antenna Requirements**

#### **3.9.1 Limit**

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

#### **3.9.2 Antenna Connector Construction**

Please refer to section 2.2 in this test report; antenna connector complied with the requirements.

**4 LIST OF MEASURING EQUIPMENTS**

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Apr. 15, 2009	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99079	9kHz – 30MHz	Mar. 23, 2009	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz – 30MHz	Mar. 22, 2009	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz – 30MHz	Apr. 20, 2009	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSU26.5	100015	20Hz ~ 26.5GHz	Oct. 29, 2009	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100444	DC ~ 40GHz	Jul. 31, 2009	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100666	DC ~ 30GHz	Aug. 05, 2009	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jul. 31, 2009	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Mar. 13, 2009	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-S	MAB0103-001	N/A	Aug. 06, 2009	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 02, 2009	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 02, 2009	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Jul. 12, 2009*	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is two year.

**Radiated Emissions (9kHz~30MHz)**

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	Jul. 28, 2008*	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is two year.

**Radiated Emissions (30MHz~1GHz)**

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Open Area Test Site	SPORTON	OATS-10	OS04-LK	30 MHz - 1 GHz 10m, 3m	Jul. 31, 2009	Radiation (OS04-LK)
Amplifier	HP	87405A	3207A01437	10 MHz - 3 GHz	Oct. 30, 2009	Radiation (OS04-LK)
Spectrum Analyzer	Advantest	R3261C	71720606	9 kHz - 2.6GHz	Feb. 04, 2010	Radiation (OS04-LK)
Receiver	R&S	ESCS 30	100168	9 kHz - 2.75 GHz	Oct. 21, 2009	Radiation (OS04-LK)
Bilog Antenna	SCHAFFNER	CBL6112B	2672B	30 MHz - 2 GHz	Jul. 11, 2009	Radiation (OS04-LK)
Turn Table	EMCO	2080	9711-2021	0 - 360 degree	N/A	Radiation (OS04-LK)
Antenna Mast	EMCO	2075	9711-2115	1 m - 4 m	N/A	Radiation (OS04-LK)
RF Cable-R03m	BELDEN	RG8/U	CB012	30 MHz - 1 GHz	Jan. 05, 2010	Radiation (OS04-LK)

Note: Calibration Interval of instruments listed above is one year.

**Radiated Emissions (1GHz~5th harmonic of highest frequency)**

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP40	100305/040	9 kHz - 40GHz	Feb. 02, 2010	Radiation (03CH02-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30 MHz - 1 GHz 3m	May 11, 2009	Radiation (03CH02-HY)
Amplifier	Agilent	8447D	2944A11146	100 kHz - 1.3 GHz	Jul. 07, 2009	Radiation (03CH02-HY)
Amplifier	Agilent	8449B	3008A02373	1GHz - 26.5 GHz	Jul. 16, 2009	Radiation (03CH02-HY)
Horn Antenna	ETS-LINDGREN	3117	00091920	1GHz~18GHz	Oct. 22, 2009	Radiation (03CH02-HY)
RF Cable-R03m	WOKEN	SMS-MF141-SMS-12M-12	03CH02-HY	30 MHz - 1 GHz	Feb. 25, 2010	Radiation (03CH02-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX106	03CH02-HY	1GHz~40GHz	Feb. 25, 2010	Radiation (03CH02-HY)
Bilog Antenna	SCHAFFNER	CBL61128	2723	30 MHz - 2 GHz	Nov. 30, 2009	Radiation (03CH02-HY)
Turn Table	HD	DS 420	420/649/00	0 - 360 degree	N/A	Radiation (03CH02-HY)
Antenna Mast	HD	MA 240	240/559/00	1 m - 4 m	N/A	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is one year.

**5 TEST LOCATION**

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 728, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

6 TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-100107

**財團法人全國認證基金會**  
**Taiwan Accreditation Foundation**

## Certificate of Accreditation

This is to certify that

**Sporton International Inc.**  
**EMC & Wireless Communications Laboratory**  
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,  
Taiwan, R.O.C.

**is accredited in respect of laboratory**

<b>Accreditation Criteria</b>	: ISO/IEC 17025:2005
<b>Accreditation Number</b>	: 1190
<b>Originally Accredited</b>	: December 15, 2003
<b>Effective Period</b>	: January 10, 2010 to January 09, 2013
<b>Accredited Scope</b>	: Testing Field, see described in the Appendix
<b>Specific Accreditation Program</b>	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities



Jay-San Chen  
President, Taiwan Accreditation Foundation  
Date : January 07, 2010

P1, total 21 pages