
FCC Test Report

Report No.: AGC00042150601FE03

FCC ID : TJ7VALOREBTK-C5

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION : Bluetooth Headset

BRAND NAME : KISS , BTK, Valore

MODEL NAME : ValoreBTK-C5 ,C5,BTK-M5,M5,M15,M13,M11,M3,C1,
BTK-M3,BTK-M6,M6,BTK-C1,C8,M8,M9,M10,M12,M14,
M15,M16,M18

CLIENT : SHENZHEN SHI KISB ELECTRONIC CO., LTD

DATE OF ISSUE : July 07,2015

STANDARD(S) : FCC Part 15 Rules

TEST PROCEDURE(S) :

REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	July 07,2015	Valid	Original Report

TABLE OF CONTENTS

- 1. VERIFICATION OF CONFORMITY 4**
- 2. GENERAL INFORMATION 5**
 - 2.1. PRODUCT DESCRIPTION 5
 - 2.2. TABLE OF CARRIER FREQUENCYS 5
- 3. MEASUREMENT UNCERTAINTY..... 7**
- 4. DESCRIPTION OF TEST MODES..... 7**
- 5. SYSTEM TEST CONFIGURATION 8**
 - 5.1. CONFIGURATION OF EUT SYSTEM..... 8
 - 5.2. EQUIPMENT USED IN EUT SYSTEM..... 8
 - 5.3. SUMMARY OF TEST RESULTS..... 8
- 6. TEST FACILITY 9**
- 7 ALL TEST EQUIPMENT LIST 9**
- 8. RADIATED EMISSION 10**
 - 8.1TEST LIMIT..... 10
 - 8.2. MEASUREMENT PROCEDURE.....11
 - 8.3. TEST SETUP..... 13
 - 8.4. TEST RESULT(Worst modulation:GFSK)..... 15
- 9. BAND EDGE EMISSION 41**
 - 9.1. MEASUREMENT PROCEDURE..... 41
 - 9.2 TEST SETUP..... 41
 - 9.3 RADIATED TEST RESULT(Worst modulation:GFSK) 42
- 10. 20DB BANDWIDTH..... 50**
 - 10.1. MEASUREMENT PROCEDURE..... 50
 - 10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 50
 - 10.3. LIMITS AND MEASUREMENT RESULTS..... 50
- 11. FCC LINE CONDUCTED EMISSION TEST 59**
 - 11.1. LIMITS OF LINE CONDUCTED EMISSION TEST 59
 - 11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST 59
 - 11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST 60
 - 11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST 60
 - 11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST 61
- APPENDIX A: PHOTOGRAPHS OF TEST SETUP 65**
- APPENDIX B: PHOTOGRAPHS OF EUT 67**

1. VERIFICATION OF CONFORMITY

Applicant	SHENZHEN SHI KISB ELECTRONIC CO., LTD
Address	3-5/F, A Building, Shanghe Industrial Park, Nanchang Road, Xixiang Town, Bao'an District, Shenzhen, Guangdong, 518103 P.R.China
Manufacturer	SHENZHEN SHI KISB ELECTRONIC CO., LTD
Address	3-5/F, A Building, Shanghe Industrial Park, Nanchang Road, Xixiang Town, Bao'an District, Shenzhen, Guangdong, 518103 P.R.China
Product Designation	Bluetooth Headset
Brand Name	KISS ,BTK,Valore
Test Model	Valore BTK-C5
Series Model	C5,BTK-M5,M5,M15,M13,M11,M3,C1,BTK-M3,BTK-M6,M6,BTK-C1,C8,M8,M9,M10,M12,M14, M15,M16,M18
Different Description	All the same except for the color and shape of appearance
Date of test	July 01,2015 to July 04,2015
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Compliance Certification Service(Shenzhen) Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.249.

Prepared By

Time Huang

Time Huang July 07,2015

Checked By

Forrest Lei

Forrest Lei July 07,2015

Authorized By

Solger Zhang

Solger Zhang July 07,2015

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
RF Output Power	3.46dBm(Max)
Bluetooth Version	V4.0
Modulation	GFSK, $\pi/4$ -DQPSK, 8DPSK
Number of channels	79 for traditional BT 40 for BLE
Hardware Version	V1.0
Software Version	V02
Antenna Designation	PCB Antenna (Met 15.203 Antenna requirement)
Antenna Gain	0.5dBi
Power Supply	DC 3.7V by battery
Note: The USB port only used for charging and can't be used to transfer data with PC.	

2.2. TABLE OF CARRIER FREQUENCIES

Traditional Bluetooth channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	0	2402MHZ
	1	2403MHZ
	:	:
	38	2440 MHZ
	39	2441 MHZ
	40	2442 MHZ
	:	:
	77	2479 MHZ
	78	2480 MHZ

BLE Channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	0	2402MHZ
	1	2404MHZ
	:	:
	38	2478 MHZ
	39	2480 MHZ

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	± 3.18 dB
2	All emissions, radiated	± 3.91 dB
3	Temperature	± 0.5 °C
4	Humidity	± 2 %

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel $\pi/4$ -DQPSK
5	Middle channel $\pi/4$ -DQPSK
6	High channel $\pi/4$ -DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	Normal operation (BT)


Note:

1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.


5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)

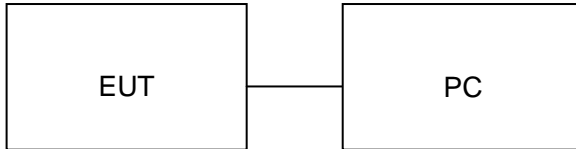

Configure 2: (Control continuous TX)

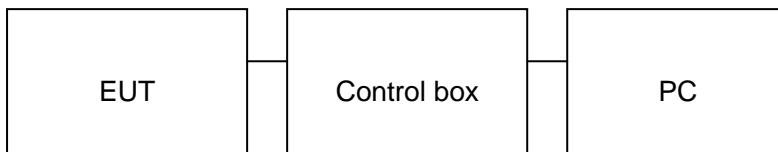

5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	Bluetooth Headset	KISS ,BTK, Valore	TJ7VALOREBTK-C5	EUT
2	PC	Dell	A1465	A.E
3	Control box	N/A	N/A	A.E
4	USB Cable 1	N/A	1.5m, unshielded	A.E
5	USB Cable 2	N/A	1.5m, unshielded	A.E

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249	Radiated Emission	Compliant
§15.249	Band Edges	Compliant
§15.207	Conduction Emission	Compliant
N/A	BANDWIDTH	Compliant

6. TEST FACILITY

Site	Compliance Certification Service(Shenzhen) Inc.
Location	No.10-1 Mingkeda Logistics Park, No.18 Huanguan South RD. Guan lan Town,Baoan Distr
FCC Registration No.	441872
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009.

7 ALL TEST EQUIPMENT LIST

Radiated Emission Test Site 966(2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2015	03/01/2016
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2015	03/08/2016
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2015	03/17/2016
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2015	03/17/2016
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	07/10/2014	07/09/2015
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/01/2015	03/01/2016
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/01/2015	03/01/2016
Loop Antenna	COM-POWER	AL-130	121044	09/27/2014	09/26/2015
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/28/2015	02/27/2016
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2015	03/08/2016
LISN(EUT)	ROHDE&SCHWARZ	ENV216	101543-WX	03/09/2015	03/08/2016
LISN	EMCO	3825/2	8901-1459	03/09/2015	03/08/2016
Temp. / Humidity Meter	VICTOR	HTC-1	N/A	03/04/2015	03/03/2016
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE			

8. RADIATED EMISSION

8.1 TEST LIMIT

Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

Standard FCC 15.209

Frequency (MHz)	Distance Meters	Field Strengths Limit	
		μ V/m	dB(μ V)/m
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	---
1.705 ~ 30	30	30	---
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other:74.0 dB(μ V)/m (Peak) 54.0 dB(μ V)/m (Average)	

Remark: (1) Emission level $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$
(2) The smaller limit shall apply at the cross point between two frequency bands.
(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

8.2. MEASUREMENT PROCEDURE

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1.5MHz VBW and RBW for peak reading. Then 1.5MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.


The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1.5MHz/1.5MHz for Peak, 1.5MHz/10Hz for Average


Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

8.3. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

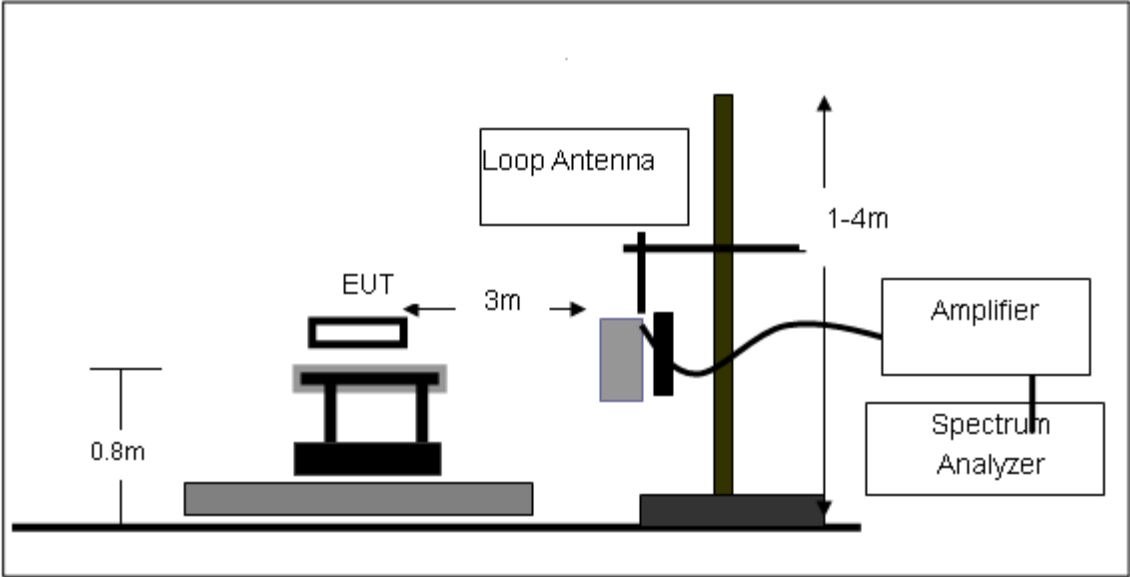

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

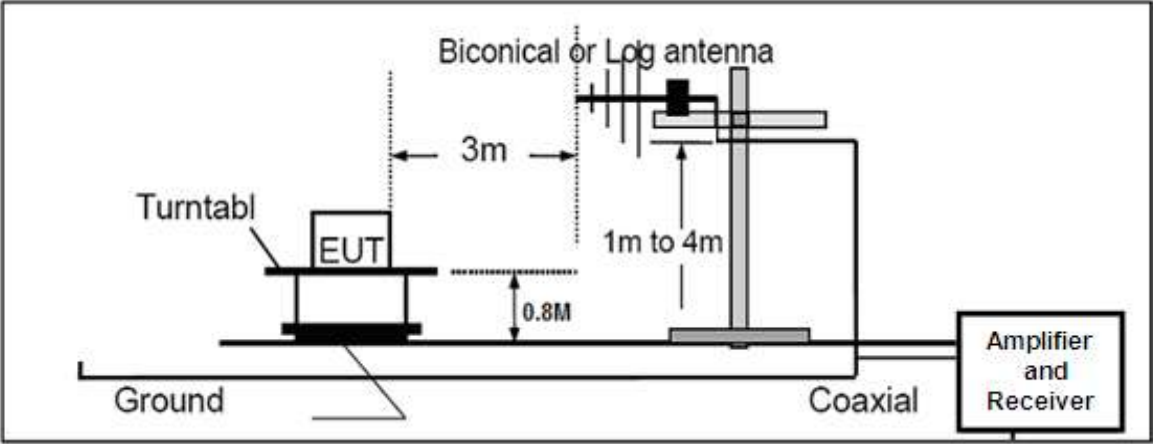

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

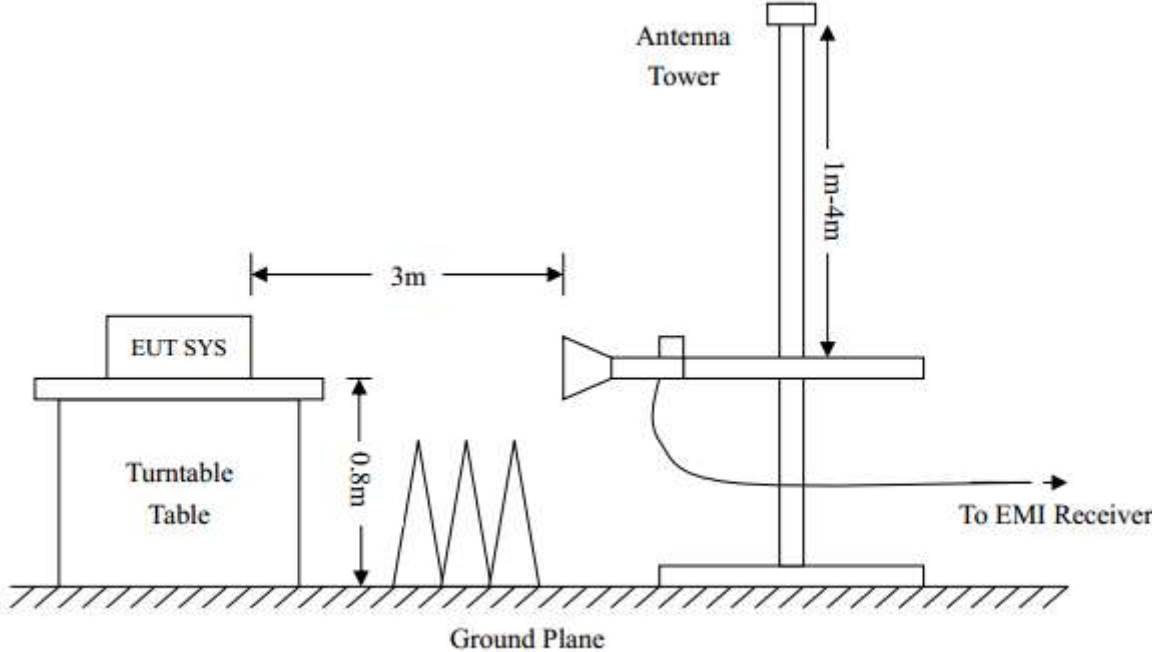


**8.4. TEST RESULT(Worst modulation:GFSK)
 FOR TRADITIONAL BLUETOOTH**

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHZ

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL

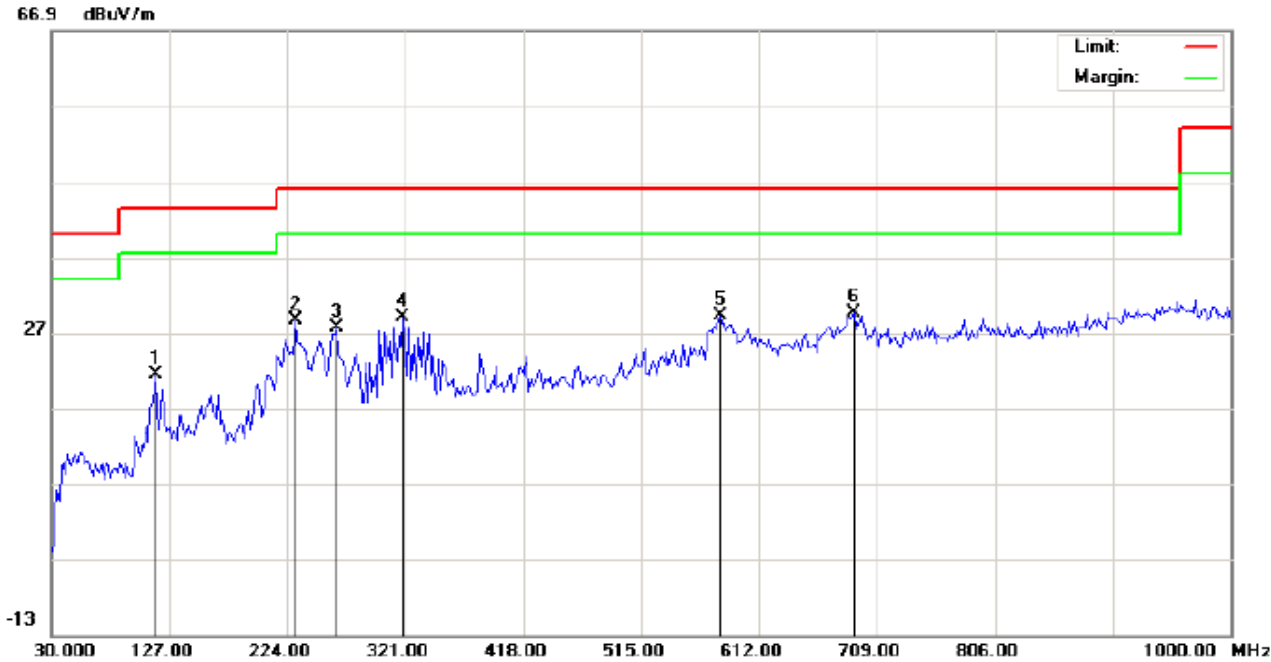

Site: site #1
 Limit: FCC Class B 3M Radiation
 EUT: Bluetooth Headset
 M/N: Valorb BTK-C5
 Mode: Low Channel TX
 Note:


Polarization: *Horizontal*
 Power:
 Distance: 3m

Temperature: 25.3
 Humidity: 58.7 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		115.6833	9.92	11.56	21.48	43.50	-22.02	peak			
2		230.4667	15.42	13.16	28.58	46.00	-17.42	peak			
3		264.4167	13.27	14.34	27.61	46.00	-18.39	peak			
4		319.3833	12.38	16.70	29.08	46.00	-16.92	peak			
5		579.6667	5.92	23.22	29.14	46.00	-16.86	peak			
6	*	689.6000	4.72	24.91	29.63	46.00	-16.37	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

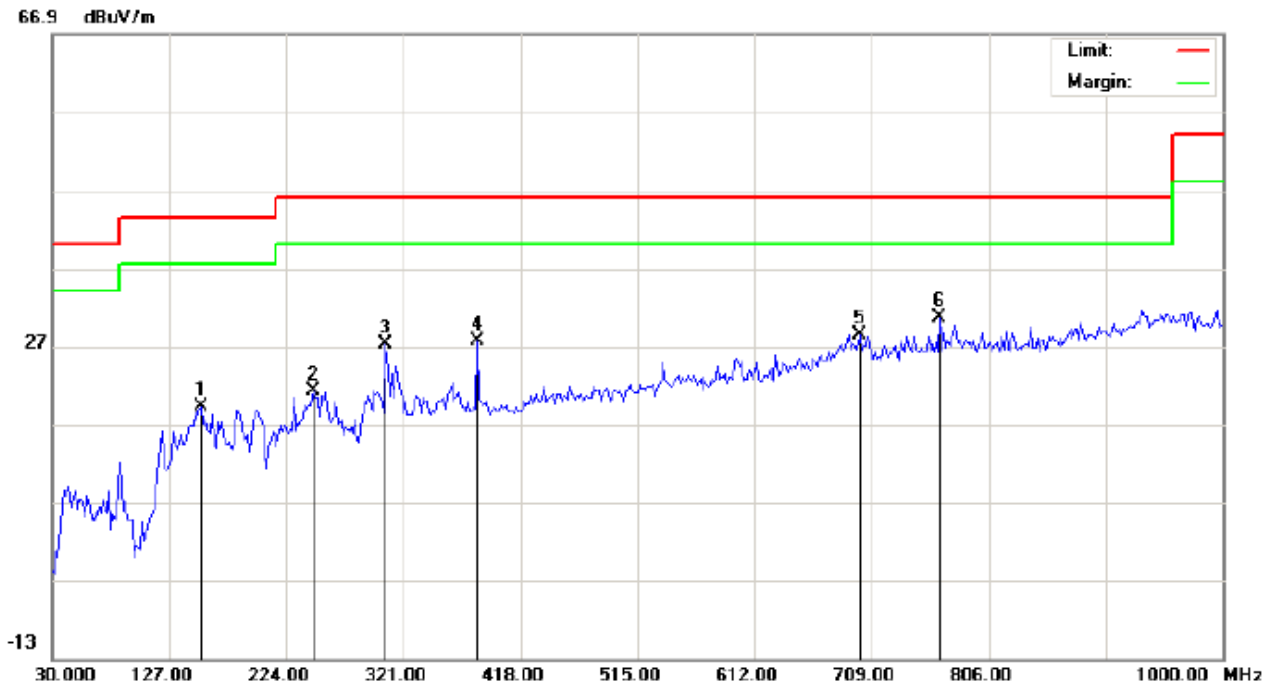

Site: site #1
Limit: FCC Class B 3M Radiation
EUT: Bluetooth Headset
M/N: Valorb BTK-C5
Mode: Low Channel TX
Note:

Polarization: *Vertical*
Power:
Distance: 3m

Temperature: 25.3
Humidity: 58.7 %


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		152.8667	3.93	15.28	19.21	43.50	-24.29	peak			
2		246.6333	7.59	13.57	21.16	46.00	-24.84	peak			
3		306.4500	11.30	15.84	27.14	46.00	-18.86	peak			
4		382.4333	8.59	18.95	27.54	46.00	-18.46	peak			
5		699.3000	3.28	25.17	28.45	46.00	-17.55	peak			
6	*	765.5833	3.68	26.85	30.53	46.00	-15.47	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

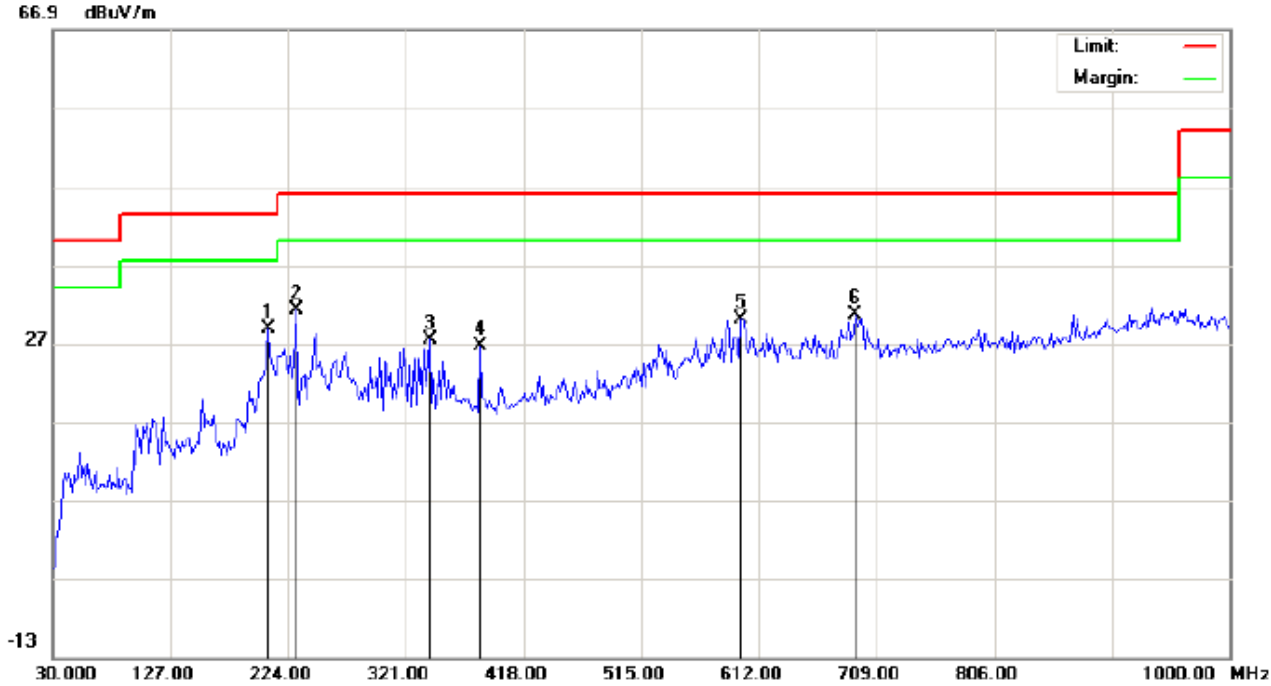

Site: site #1
 Limit: FCC Class B 3M Radiation
 EUT: Bluetooth Headset
 M/N: Valorb BTK-C5
 Mode: Middle Channel TX
 Note:


Polarization: *Horizontal*
 Power:
 Distance: 3m

Temperature: 25.3
 Humidity: 58.7 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	207.8333	16.47	12.30	28.77	43.50	-14.73	peak			
2		230.4667	18.11	13.16	31.27	46.00	-14.73	peak			
3		340.4000	9.38	18.10	27.48	46.00	-18.52	peak			
4		382.4333	7.63	18.95	26.58	46.00	-19.42	peak			
5		597.4500	6.24	23.67	29.91	46.00	-16.09	peak			
6		691.2167	5.67	24.95	30.62	46.00	-15.38	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

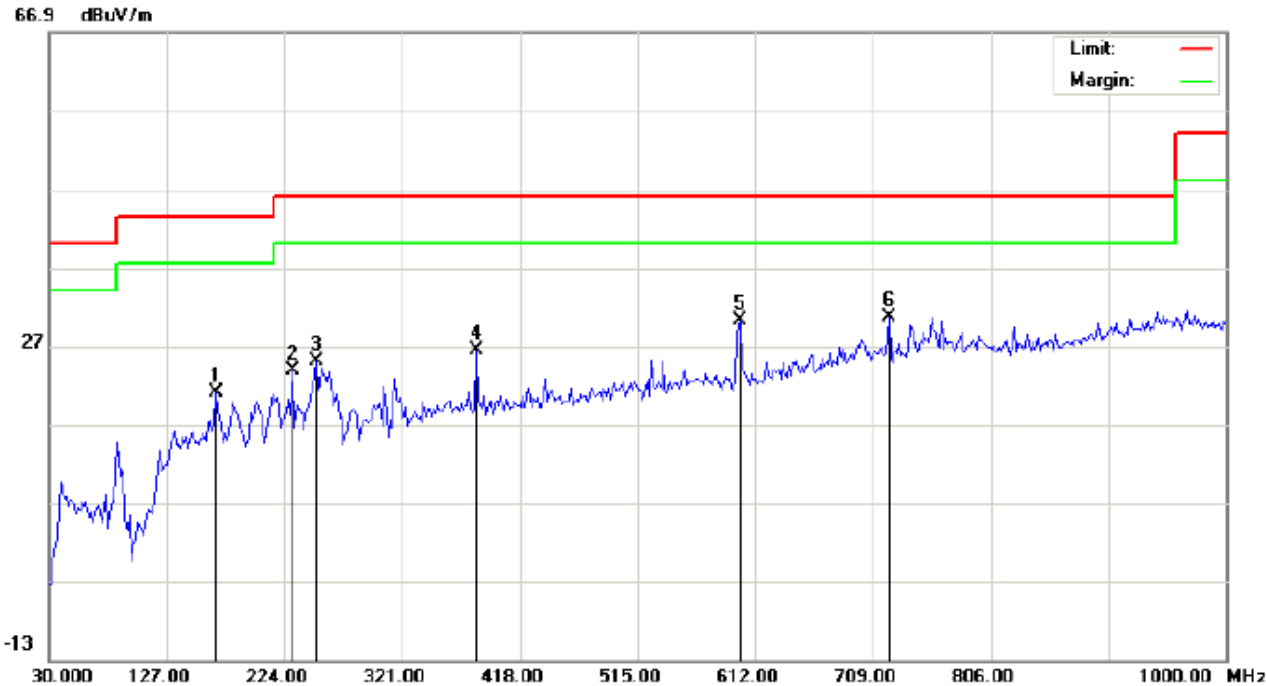

Site: site #1
 Limit: FCC Class B 3M Radiation
 EUT: Bluetooth Headset
 M/N: Valorb BTK-C5
 Mode: Middle Channel TX
 Note:

Polarization: *Vertical*
 Power:
 Distance: 3m

Temperature: 25.3
 Humidity: 58.7 %


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		167.4167	6.15	14.86	21.01	43.50	-22.49	peak			
2		230.4667	11.80	11.99	23.79	46.00	-22.21	peak			
3		249.8667	11.10	13.89	24.99	46.00	-21.01	peak			
4		382.4333	7.47	18.95	26.42	46.00	-19.58	peak			
5		599.0667	7.54	22.73	30.27	46.00	-15.73	peak			
6	*	721.9333	4.72	25.82	30.54	46.00	-15.46	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

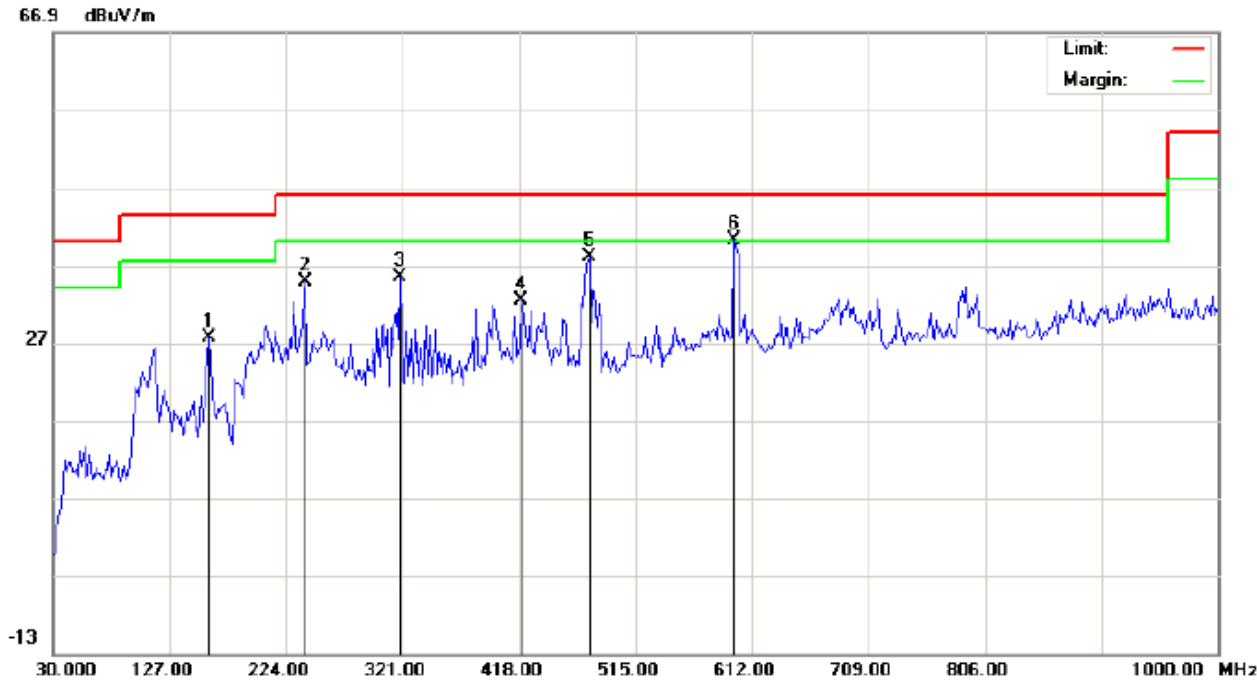

Site: site #1
 Limit: FCC Class B 3M Radiation
 EUT: Bluetooth Headset
 M/N: Valorb BTK-C5
 Mode: High Channel TX
 Note:


Polarization: *Horizontal*
 Power:
 Distance: 3m

Temperature: 25.3
 Humidity: 58.7 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		159.3333	12.36	15.33	27.69	43.50	-15.81	peak			
2		240.1667	21.33	13.53	34.86	46.00	-11.14	peak			
3		319.3833	18.80	16.70	35.50	46.00	-10.50	peak			
4		419.6167	12.79	19.67	32.46	46.00	-13.54	peak			
5		476.2000	17.12	20.87	37.99	46.00	-8.01	peak			
6	*	597.4500	16.46	23.67	40.13	46.00	-5.87	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

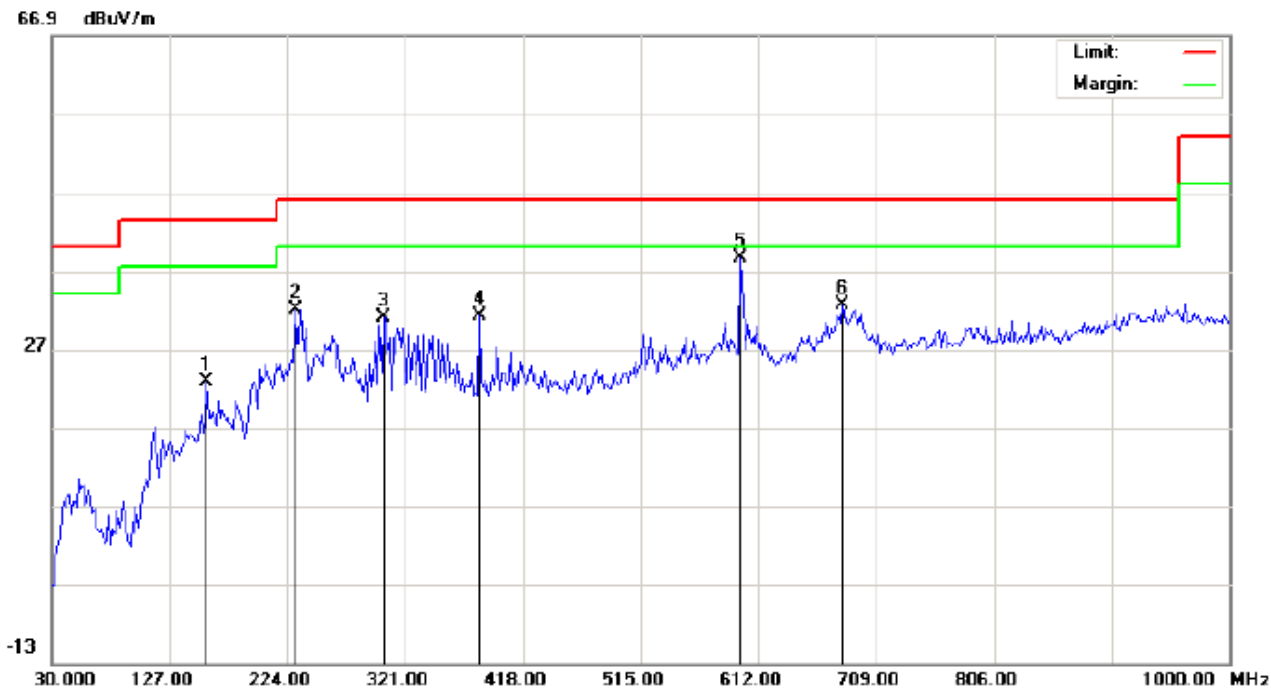

Site: site #1	Polarization: <i>Vertical</i>	Temperature: 25.3
Limit: FCC Class B 3M Radiation	Power:	Humidity: 58.7 %
EUT: Bluetooth Headset	Distance: 3m	
M/N: Valorb BTK-C5		
Mode: High Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		157.7167	7.54	15.32	22.86	43.50	-20.64	peak			
2		230.4667	20.04	11.99	32.03	46.00	-13.97	peak			
3		303.2167	15.39	15.62	31.01	46.00	-14.99	peak			
4		382.4333	12.31	18.95	31.26	46.00	-14.74	peak			
5	*	597.4500	15.89	22.72	38.61	46.00	-7.39	peak			
6		681.5167	7.92	24.69	32.61	46.00	-13.39	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.
 2. The “Factor” value can be calculated automatically by software of measurement system.


FOR BLE

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHZ

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL

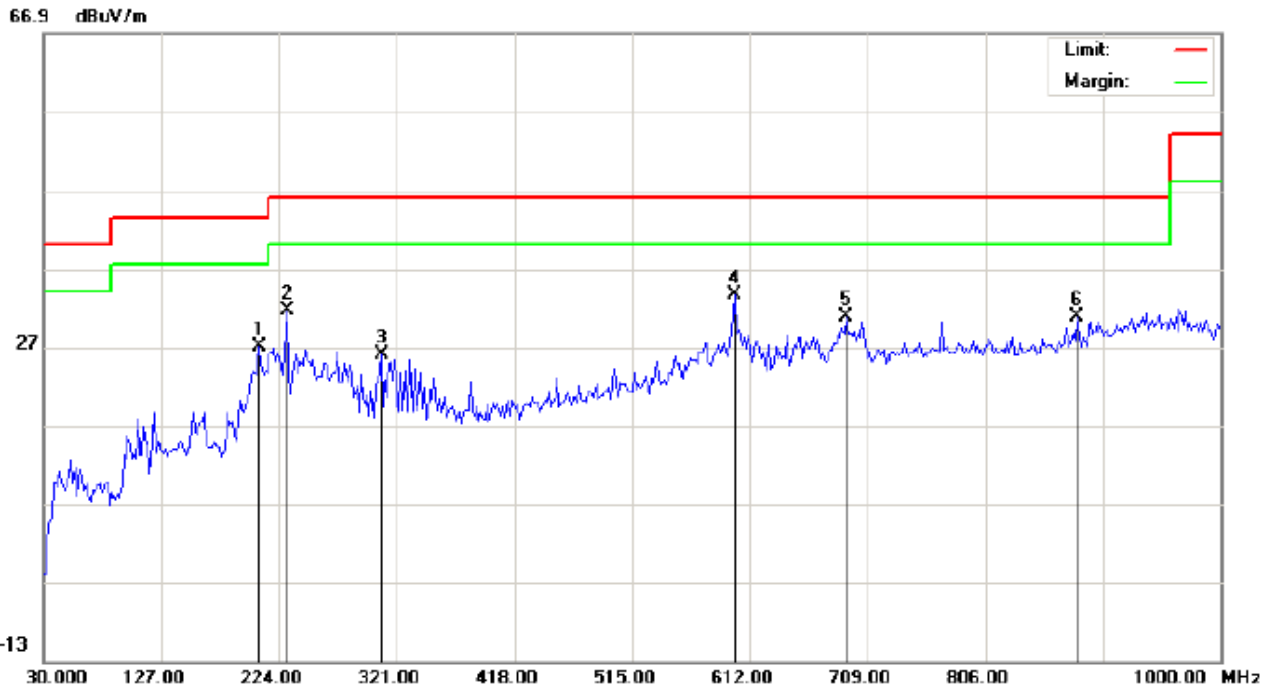

Site: site #1
Limit: FCC Class B 3M Radiation
EUT: Bluetooth Headset
M/N: Valorb BTK-C5
Mode: Low Channel TX
Note:


Polarization: *Horizontal*
Power:
Distance: 3m

Temperature: 25.3
Humidity: 58.7 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		207.8333	14.66	12.30	26.96	43.50	-16.54	peak			
2		230.4667	18.51	13.16	31.67	46.00	-14.33	peak			
3		308.0667	10.14	15.95	26.09	46.00	-19.91	peak			
4	*	599.0667	9.91	23.71	33.62	46.00	-12.38	peak			
5		691.2167	5.78	24.95	30.73	46.00	-15.27	peak			
6		881.9833	2.71	28.14	30.85	46.00	-15.15	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

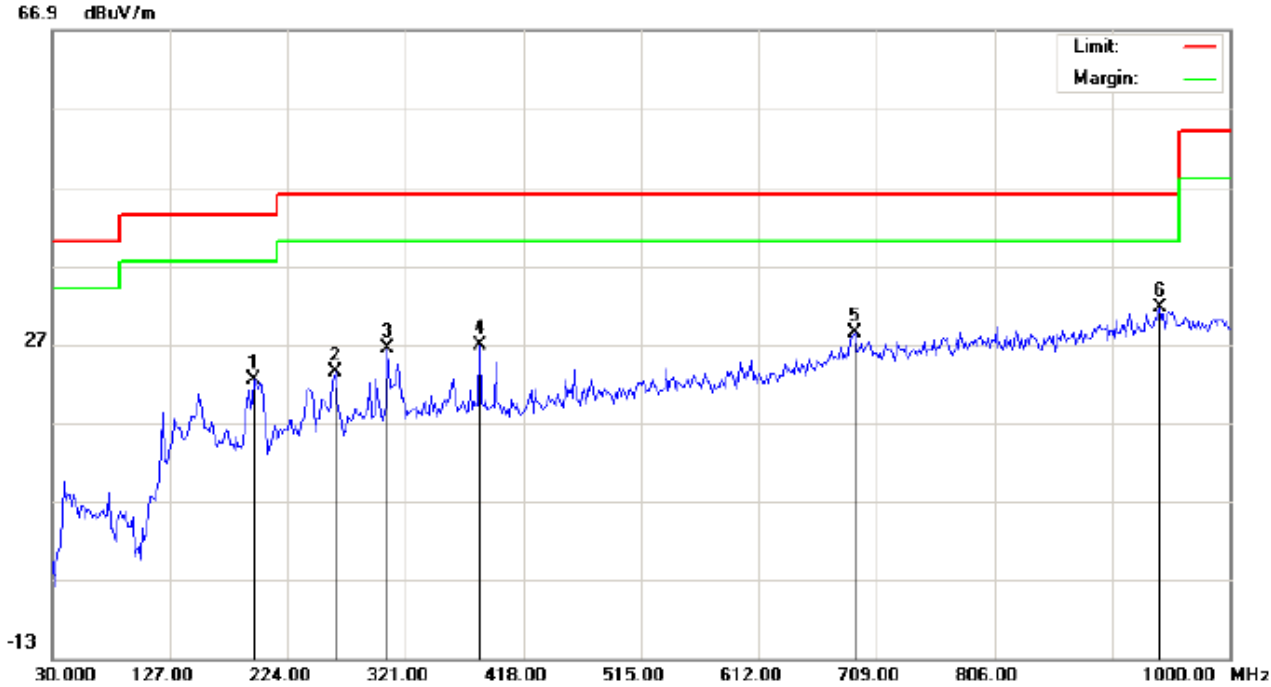

Site: site #1
 Limit: FCC Class B 3M Radiation
 EUT: Bluetooth Headset
 M/N: Valorb BTK-C5
 Mode: Low Channel TX
 Note:

Polarization: *Vertical*
 Power:
 Distance: 3m


Temperature: 25.3
 Humidity: 58.7 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		196.5167	12.61	9.88	22.49	43.50	-21.01	peak			
2		262.8000	9.10	14.29	23.39	46.00	-22.61	peak			
3		306.4500	10.57	15.84	26.41	46.00	-19.59	peak			
4		382.4333	7.82	18.95	26.77	46.00	-19.23	peak			
5		691.2167	3.46	24.95	28.41	46.00	-17.59	peak			
6	*	941.8000	1.77	29.77	31.54	46.00	-14.46	peak			

RESULT: PASS

- Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.
 2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

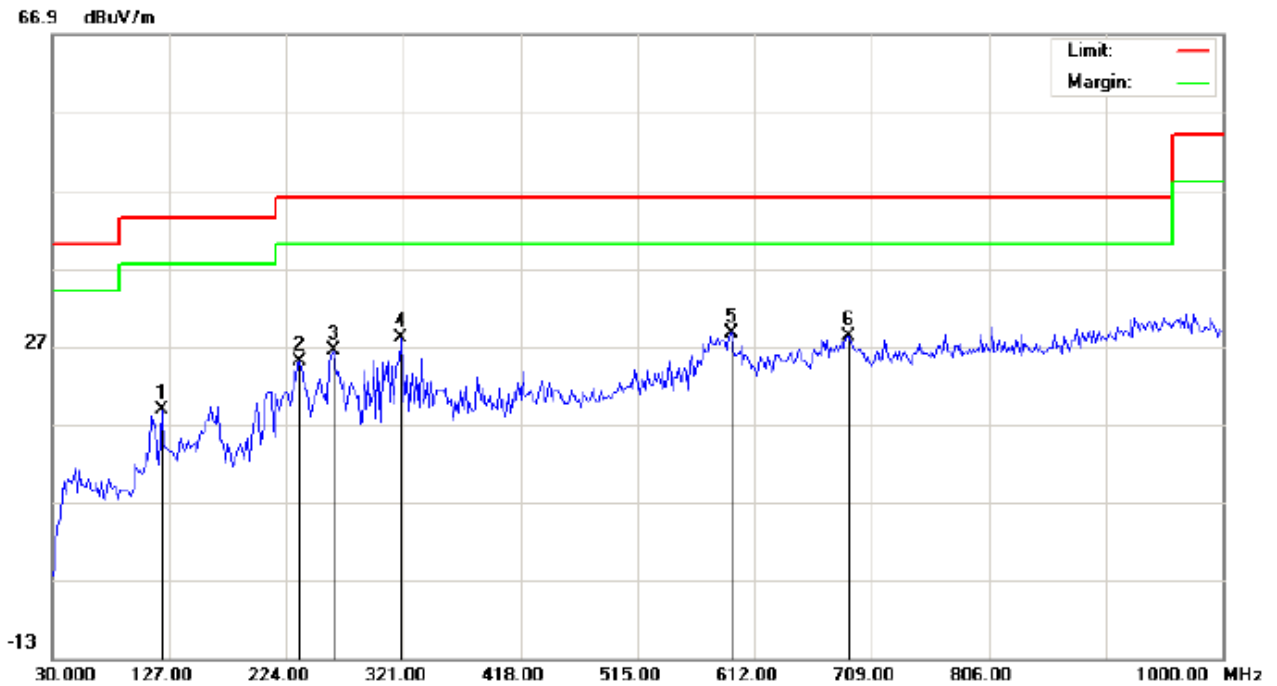

Site: site #1
 Limit: FCC Class B 3M Radiation
 EUT: Bluetooth Headset
 M/N: Valorb BTK-C5
 Mode: Middle Channel TX
 Note:


Polarization: *Horizontal*
 Power:
 Distance: 3m

Temperature: 25.3
 Humidity: 58.7 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		120.5333	6.86	11.95	18.81	43.50	-24.69	peak			
2		235.3167	11.66	13.34	25.00	46.00	-21.00	peak			
3		262.8000	12.21	14.29	26.50	46.00	-19.50	peak			
4		319.3833	11.30	16.70	28.00	46.00	-18.00	peak			
5	*	592.6000	5.15	23.55	28.70	46.00	-17.30	peak			
6		689.6000	3.28	24.91	28.19	46.00	-17.81	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

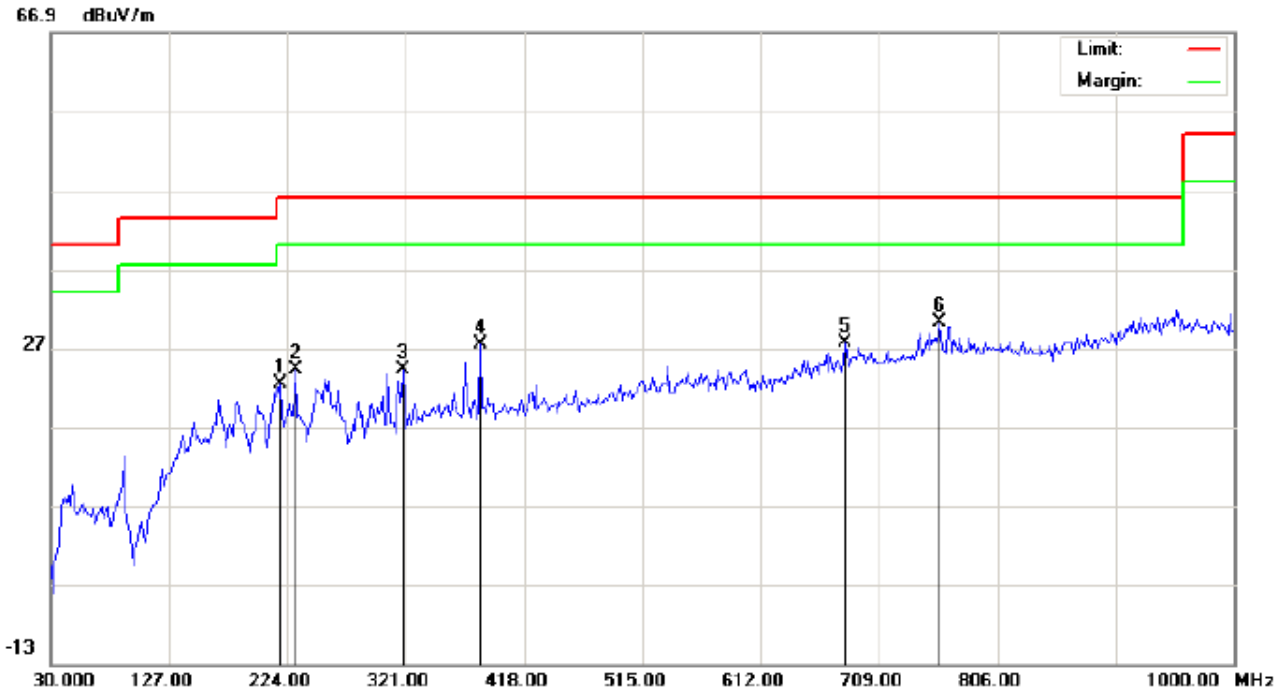

Site: site #1	Polarization: <i>Vertical</i>	Temperature: 25.3
Limit: FCC Class B 3M Radiation	Power:	Humidity: 58.7 %
EUT: Bluetooth Headset	Distance: 3m	
M/N: Valorb BTK-C5		
Mode: Middle Channel TX		
Note:		


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		217.5333	11.60	10.72	22.32	46.00	-23.68	peak			
2		230.4667	12.26	11.99	24.25	46.00	-21.75	peak			
3		319.3833	7.49	16.70	24.19	46.00	-21.81	peak			
4		382.4333	8.52	18.95	27.47	46.00	-18.53	peak			
5		681.5167	2.99	24.69	27.68	46.00	-18.32	peak			
6	*	759.1167	3.51	26.76	30.27	46.00	-15.73	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

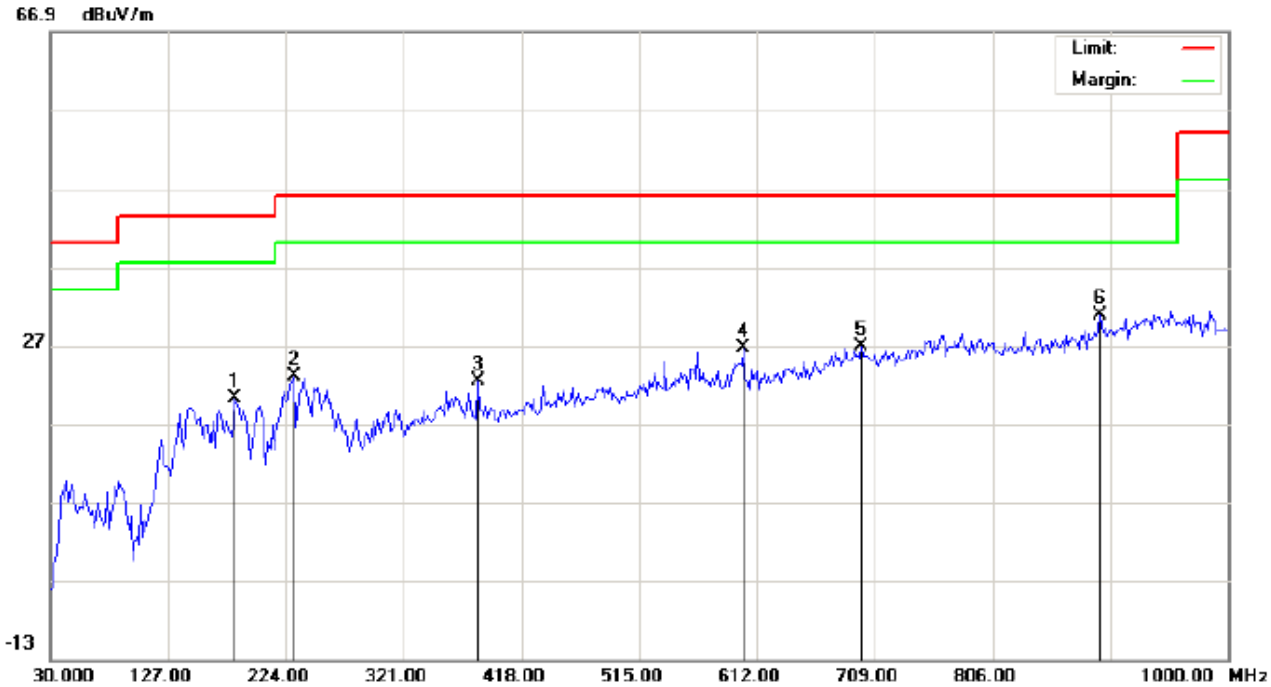

Site: site #1
 Limit: FCC Class B 3M Radiation
 EUT: Bluetooth Headset
 M/N: Valorb BTK-C5
 Mode: High Channel TX
 Note:

Polarization: *Vertical*
 Power:
 Distance: 3m


Temperature: 25.3
 Humidity: 58.7 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		181.9667	6.71	13.57	20.28	43.50	-23.22	peak			
2		230.4667	11.10	11.99	23.09	46.00	-22.91	peak			
3		382.4333	3.50	18.95	22.45	46.00	-23.55	peak			
4		600.6833	3.85	22.75	26.60	46.00	-19.40	peak			
5		697.6833	1.75	25.13	26.88	46.00	-19.12	peak			
6	*	894.9167	2.40	28.48	30.88	46.00	-15.12	peak			

RESULT: PASS

- Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.
 2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

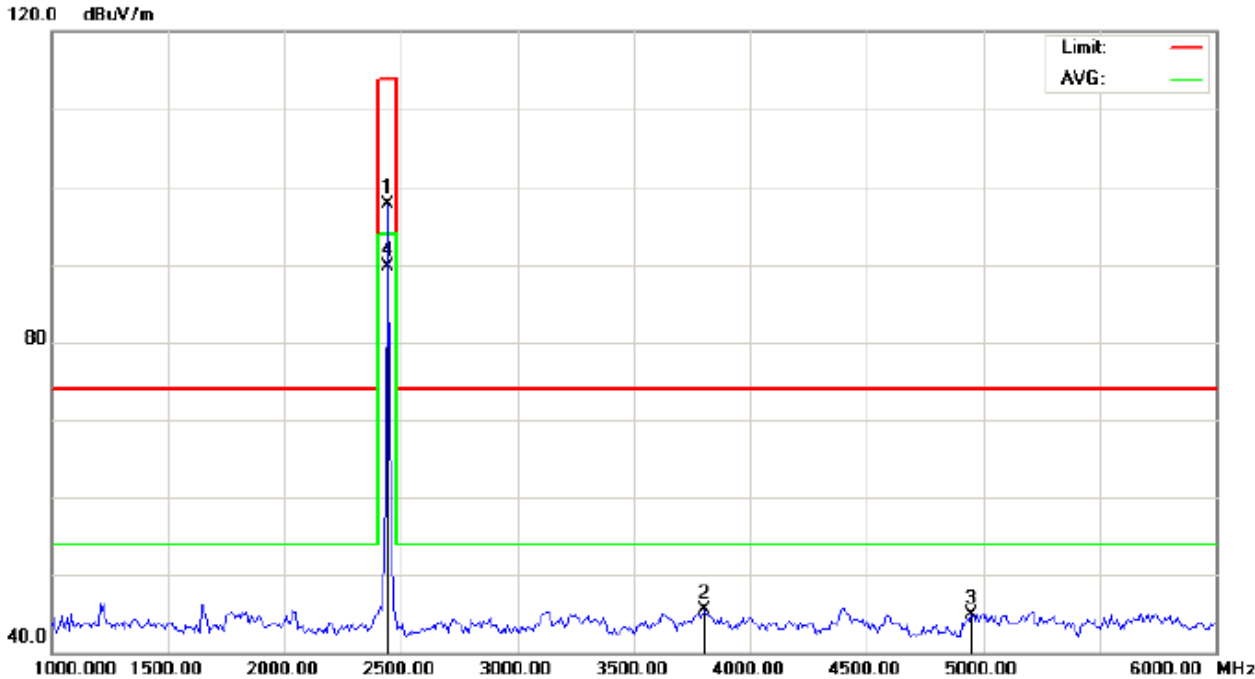

Site: site #1
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)-
 EUT: Bluetooth Headset
 M/N: Valorb BTK-C5
 Mode: Middle Channel TX
 Note:

Polarization: *Horizontal*
 Power:
 Distance: 3m

Temperature: 26
 Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2441.000	107.29	-9.63	97.66	114.00	-16.34	peak			
2		3800.000	51.55	-6.04	45.51	74.00	-28.49	peak			
3		4950.000	46.82	-1.93	44.89	74.00	-29.11	peak			
4	*	2441.000	99.41	-9.63	89.78	94.00	-4.22	AVG	150	251	

RESULT: PASS

Field strength of the fundamental signal

Peak value


Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	105.65	-9.68	95.97	114	-18.03	Horizontal
2402	105.35	-9.68	95.67	114	-18.33	Vertical
2441	107.29	-9.63	97.66	114	-16.33	Horizontal
2441	107.23	-9.63	97.60	114	-16.40	Vertical
2480	106.87	-9.59	97.28	114	-16.72	Horizontal
2480	106.72	-9.59	97.13	114	-16.87	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	99.26	-9.68	89.58	94	-4.42	Horizontal
2402	99.21	-9.68	89.53	94	-4.47	Vertical
2441	99.41	-9.63	89.78	94	-4.22	Horizontal
2441	98.90	-9.63	89.27	94	-4.73	Vertical
2480	99.22	-9.59	89.63	94	-4.37	Horizontal
2480	99.41	-9.59	89.82	94	-4.18	Vertical

FOR BLE

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL

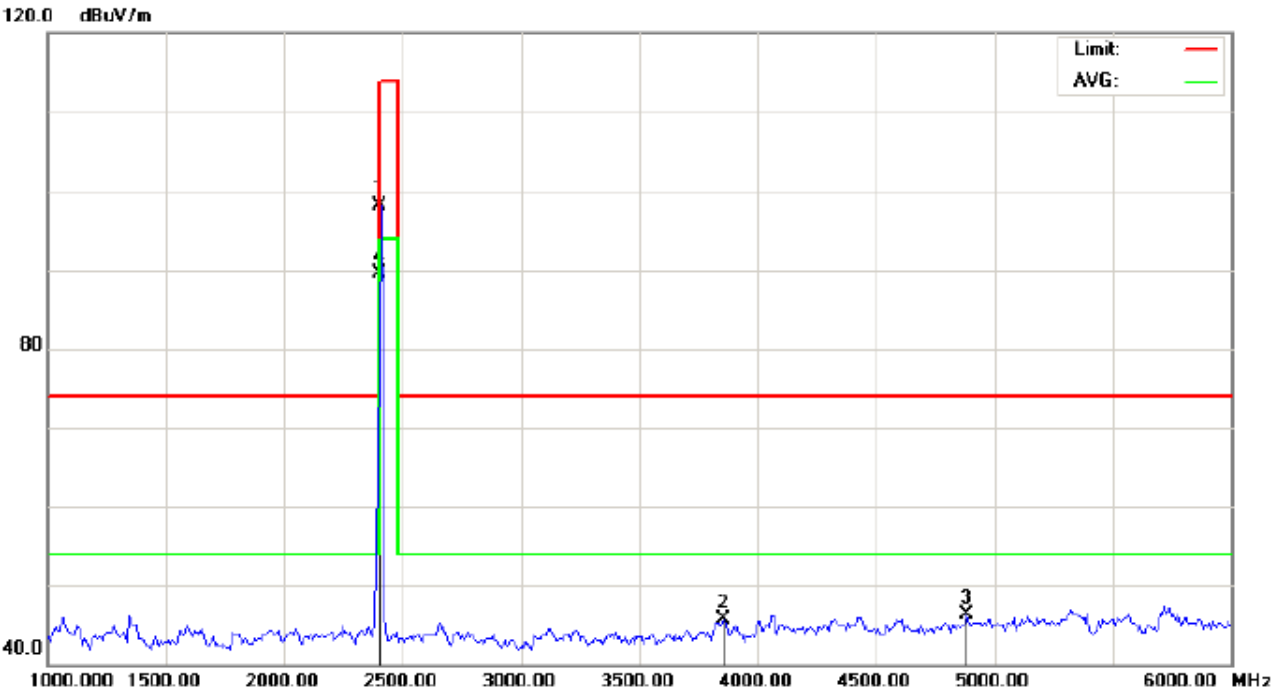

Site: site #1
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)-
 EUT: Bluetooth Headset
 M/N: Valorb BTK-C5
 Mode: Low Channel TX
 Note:


Polarization: *Horizontal*
 Power:
 Distance: 3m

Temperature: 26
 Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	107.73	-9.68	98.05	114.00	-15.95	peak			
2		3858.333	51.31	-5.68	45.63	74.00	-28.37	peak			
3		4883.333	48.34	-2.11	46.23	74.00	-27.77	peak			
4	*	2402.000	99.13	-9.68	89.45	94.00	-4.55	AVG	150	291	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL- VERTICAL

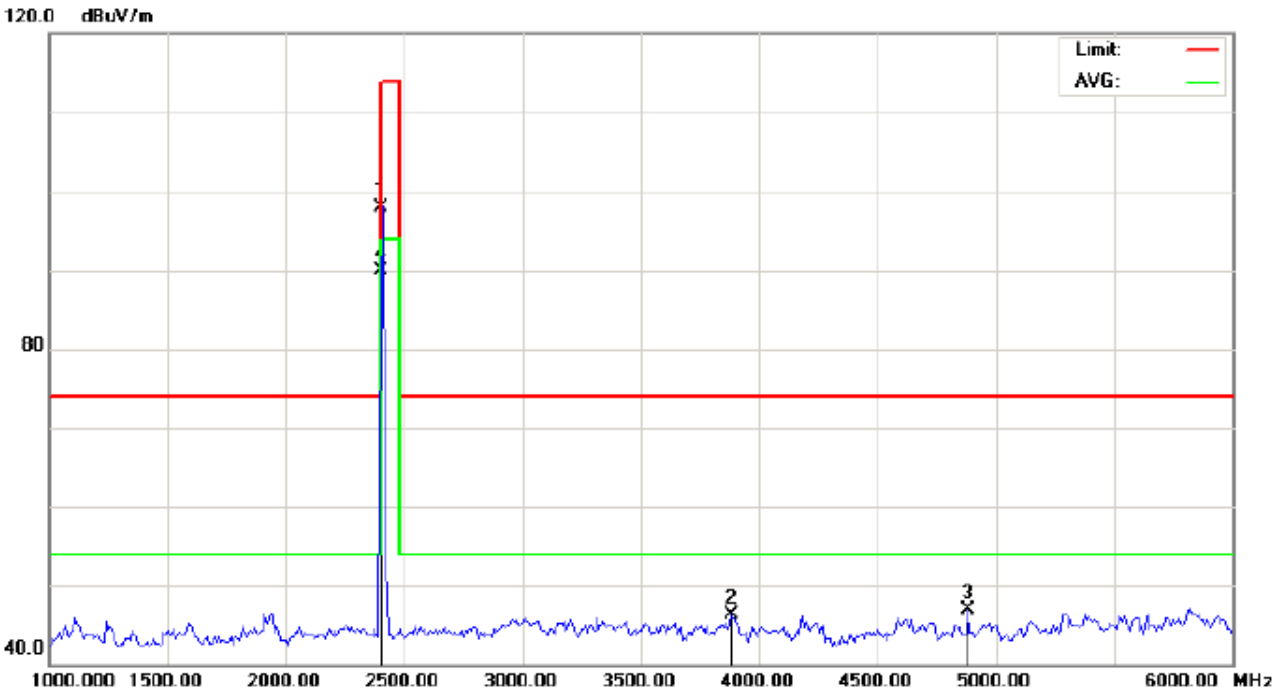

Site: site #1
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)-
 EUT: Bluetooth Headset
 M/N: Valorb BTK-C5
 Mode: Low Channel TX
 Note:


Polarization: **Vertical**
 Power:
 Distance: 3m

Temperature: 26
 Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1		2402.000	107.64	-9.68	97.96	114.00	-16.04	peak			
2		3883.333	51.85	-5.53	46.32	74.00	-27.68	peak			
3		4883.333	48.96	-2.11	46.85	74.00	-27.15	peak			
4	*	2402.000	99.51	-9.68	89.83	94.00	-4.17	AVG	150	51	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

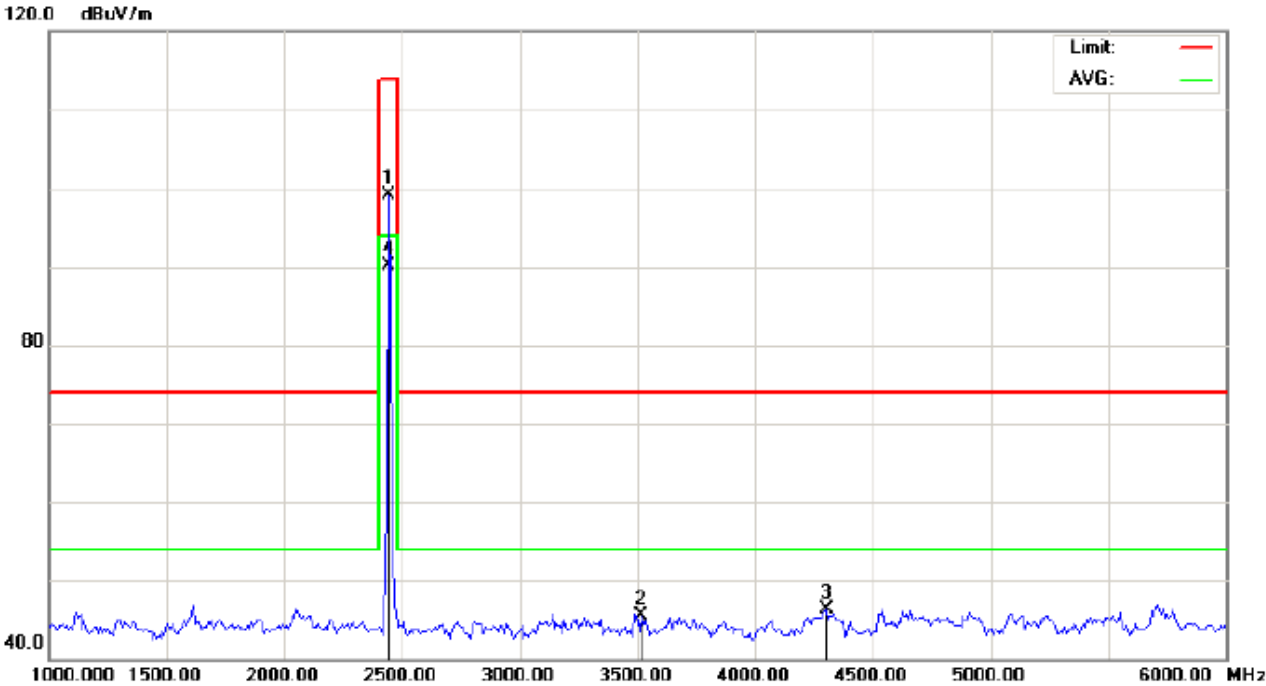

Site: site #1
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)-
 EUT: Bluetooth Headset
 M/N: Valorb BTK-C5
 Mode: Middle Channel TX
 Note:


Polarization: *Horizontal*
 Power:
 Distance: 3m

Temperature: 26
 Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2440.000	108.79	-9.63	99.16	114.00	-14.84	peak			
2		3516.667	53.27	-7.79	45.48	74.00	-28.52	peak			
3		4300.000	50.05	-3.79	46.26	74.00	-27.74	peak			
4	*	2440.000	99.76	-9.63	90.13	94.00	-3.87	AVG	150	57	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL- VERTICAL

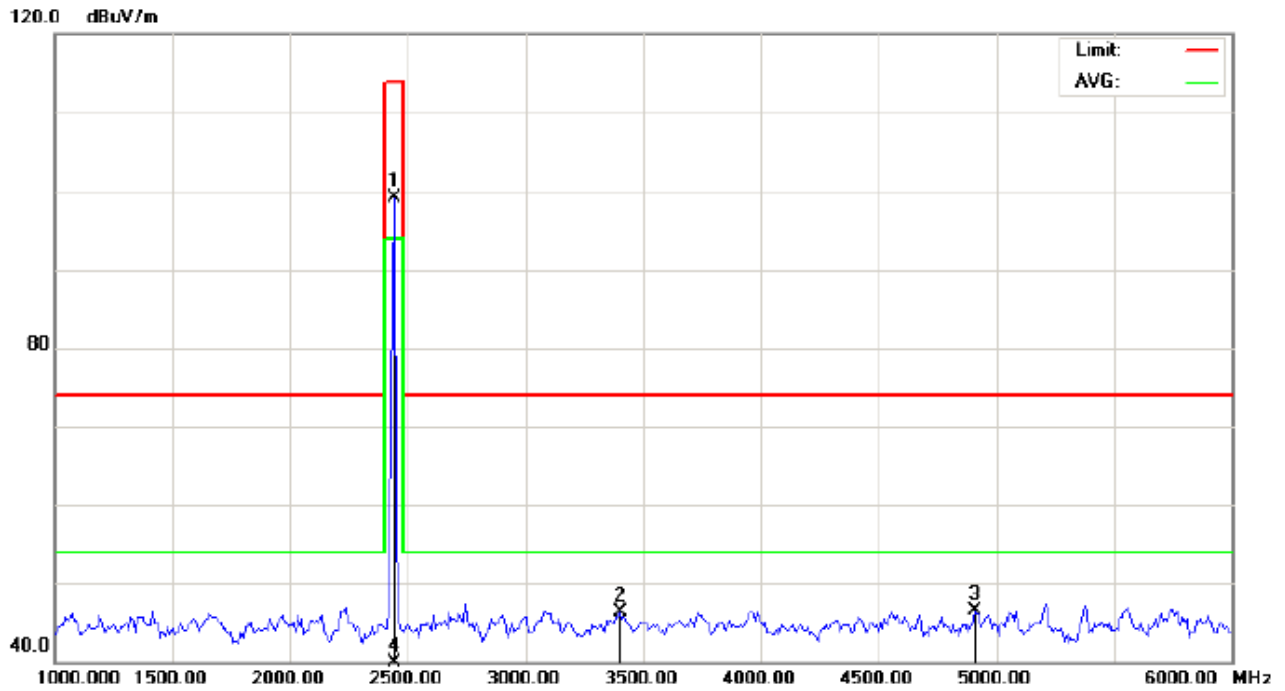

Site: site #1
Limit: FCC Class B 3M Radiation above 1GHZ(PK)-
EUT: Bluetooth Headset
M/N: Valorb BTK-C5
Mode: Middle Channel TX
Note:


Polarization: *Vertical*
Power:
Distance: 3m

Temperature: 26
Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2440.000	108.73	-9.63	99.10	114.00	-14.90	peak			
2		3400.000	54.21	-7.98	46.23	74.00	-27.77	peak			
3		4908.333	48.58	-2.04	46.54	74.00	-27.46	peak			
4		2440.000	98.94	-9.63	89.31	94.00	4.69	AVG	150	229	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

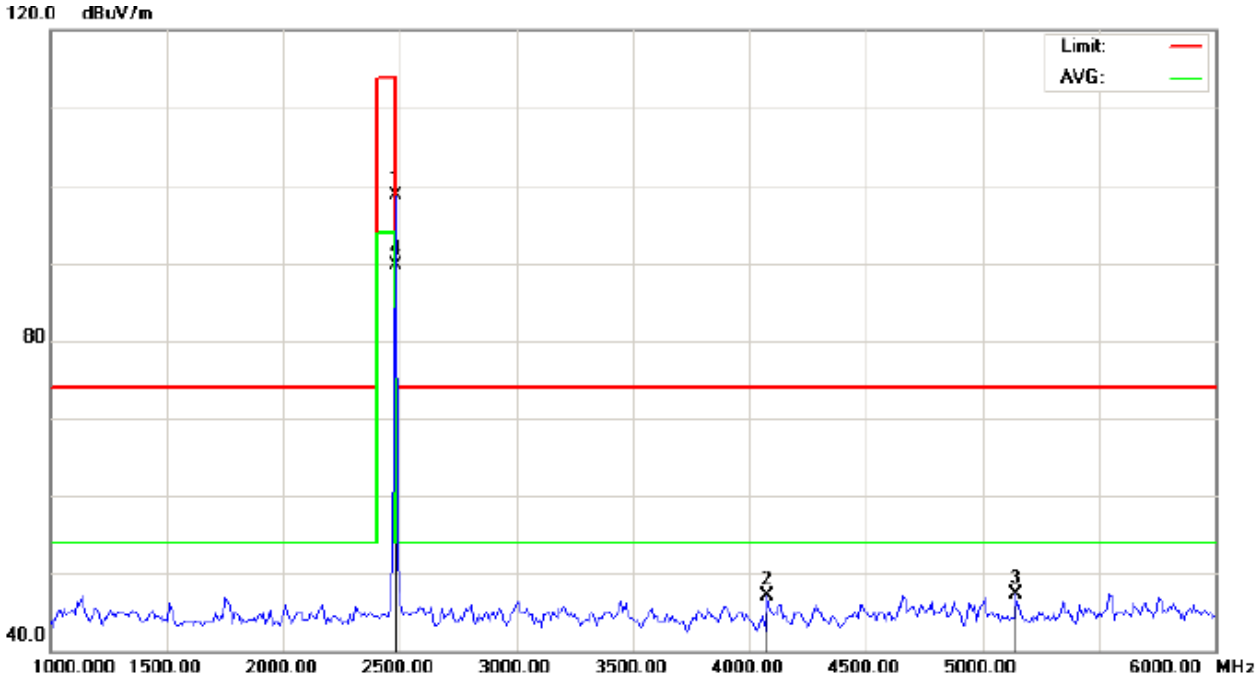


Site: site #1 Polarization: *Horizontal* Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
 EUT: Bluetooth Headset Distance: 3m
 M/N: Valorb BTK-C5
 Mode: High Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	108.36	-9.59	98.77	114.00	-15.23	peak			
2		4075.000	51.69	-4.55	47.14	74.00	-26.86	peak			
3		5141.667	49.10	-1.80	47.30	74.00	-26.70	peak			
4	*	2480.000	99.32	-9.59	89.73	94.00	-4.27	AVG	150	249	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL- VERTICAL

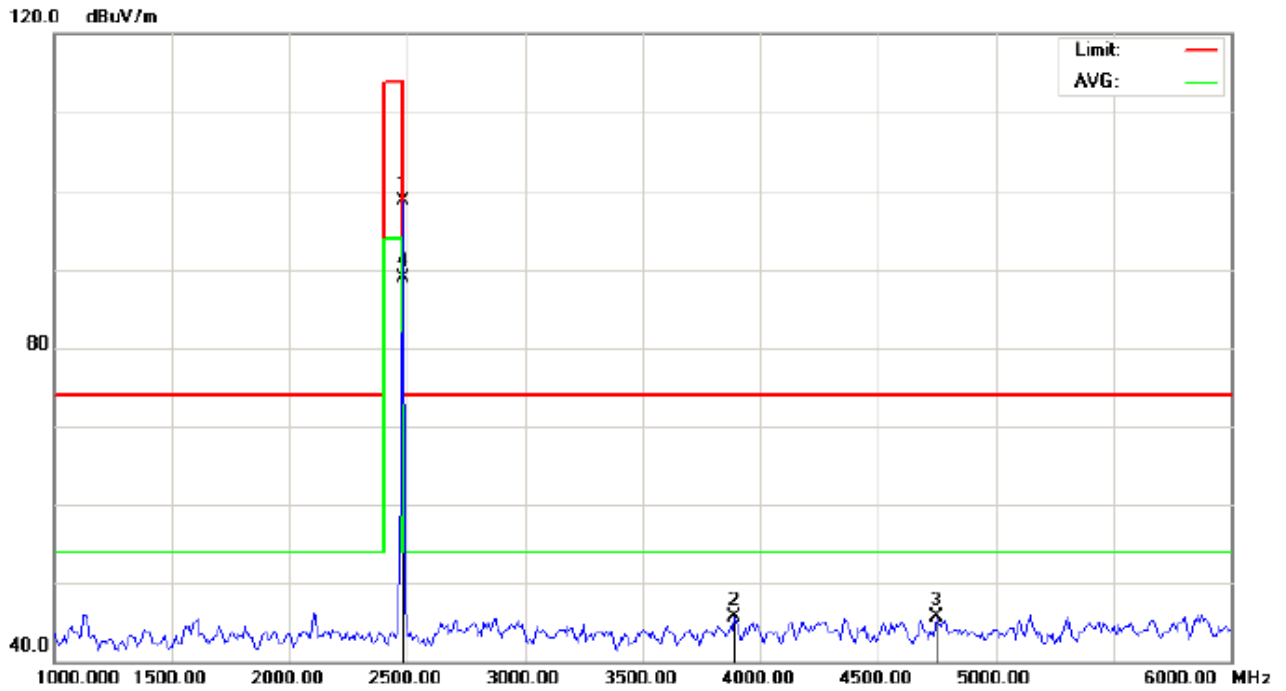

Site: site #1 Polarization: **Vertical** Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %
 EUT: Bluetooth Headset Distance: 3m
 M/N: Valorb BTK-C5
 Mode: High Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	108.28	-9.59	98.69	114.00	-15.31	peak			
2		3891.667	51.21	-5.48	45.73	74.00	-28.27	peak			
3		4750.000	48.13	-2.45	45.68	74.00	-28.32	peak			
4	*	2480.000	98.57	-9.59	88.98	94.00	-5.02	AVG	150	59	

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Field strength of the fundamental signal

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	107.73	-9.68	98.05	114	-15.95	Horizontal
2402	107.64	-9.68	97.96	114	-16.04	Vertical
2440	108.79	-9.63	99.16	114	-14.84	Horizontal
2440	108.73	-9.63	99.10	114	-14.90	Vertical
2480	108.36	-9.59	98.77	114	-15.23	Horizontal
2480	108.28	-9.59	98.69	114	-15.31	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	99.13	-9.68	89.45	94	-4.55	Horizontal
2402	99.51	-9.68	89.83	94	-4.17	Vertical
2440	99.76	-9.63	90.13	94	-3.87	Horizontal
2440	98.94	-9.63	89.31	94	-4.69	Vertical
2480	99.32	-9.59	89.73	94	-4.27	Horizontal
2480	98.57	-9.59	88.98	94	-5.02	Vertical

9. BAND EDGE EMISSION

9.1. MEASUREMENT PROCEDURE


1The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.

2Max hold the trace of the setp 1,and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.


3Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission: (a) PEAK: RBW=VBW=1.5MHz / Sweep=AUTO

9.2 TEST SETUP

RADIATED EMISSION TEST SETUP

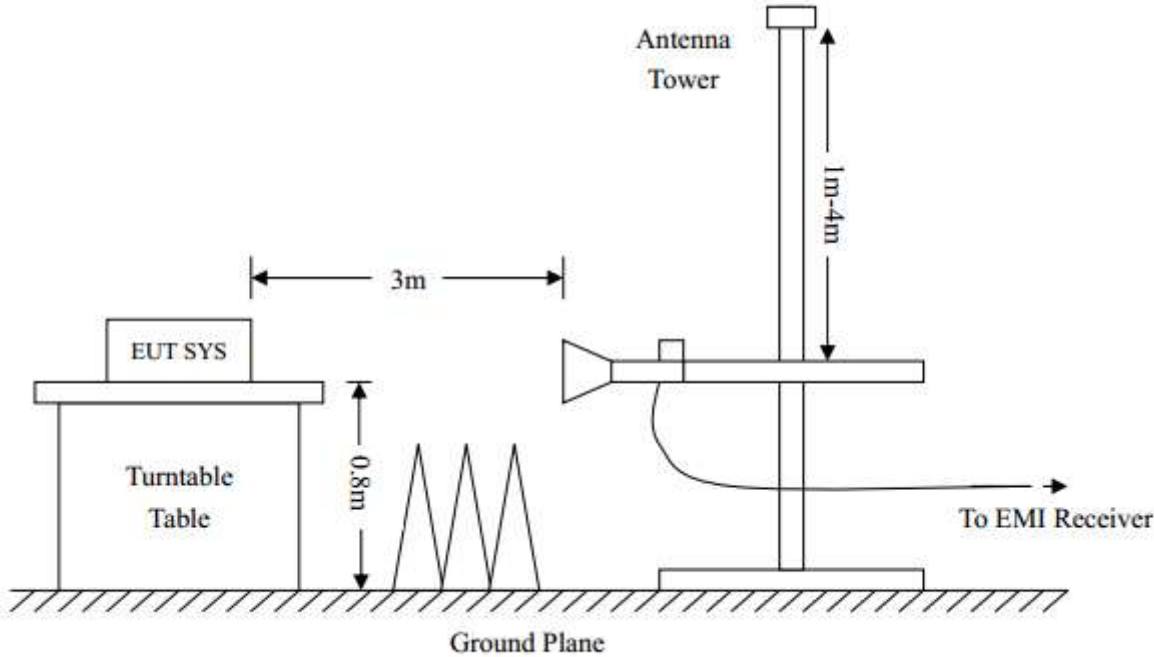


CONDUCTED TEST SETUP

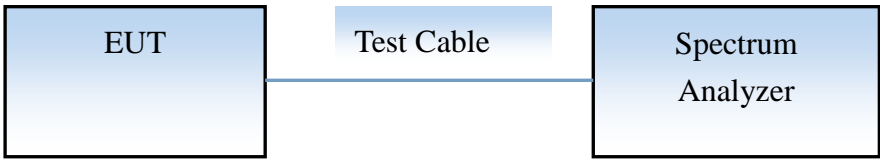

**9.3 RADIATED TEST RESULT(Worst modulation:GFSK)
 FOR TRADITIONAL BLEUTOOTH**

TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

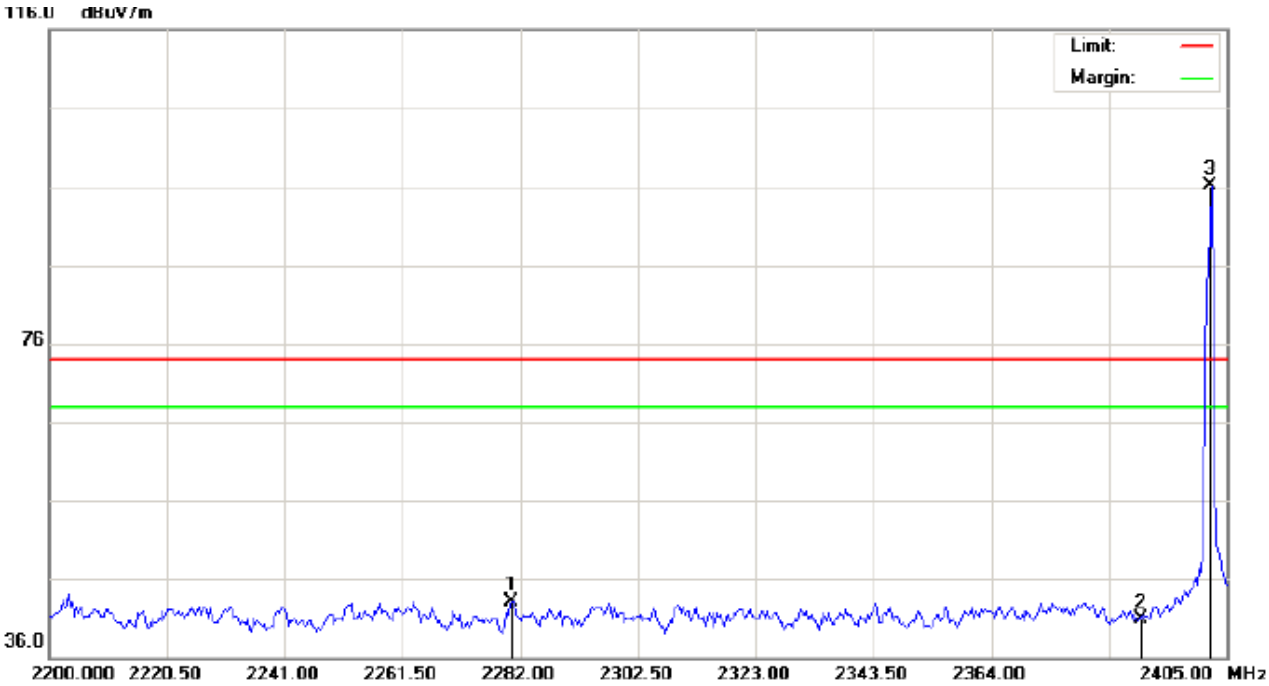


Site: site #1
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)
 EUT: Bluetooth Headset
 M/N: Valorb BTK-C5
 Mode: Low Channel TX
 Note:

Polarization: *Horizontal*
 Power:
 Distance:

Temperature: 26
 Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2280.633	32.91	10.19	43.10	74.00	-30.90	peak			
2		2390.000	30.50	10.31	40.81	74.00	-33.19	peak			
3	*	2402.000	85.72	10.32	96.04	74.00	22.04	peak			


TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

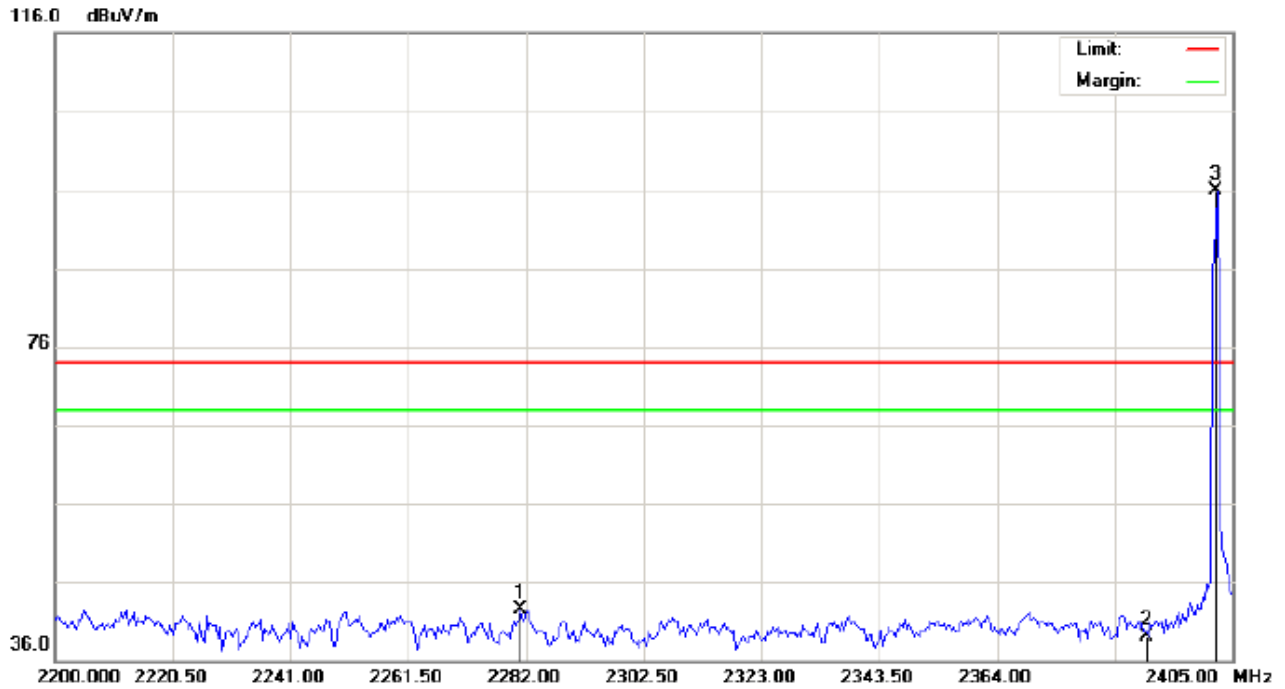

Site: site #1 Polarization: *Vertical* Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
 EUT: Bluetooth Headset Distance:
 M/N: Valorb BTK-C5
 Mode: Low Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2280.975	32.24	10.19	42.43	74.00	-31.57	peak			
2		2390.000	28.71	10.31	39.02	74.00	-34.98	peak			
3	*	2402.000	85.59	10.32	95.91	74.00	21.91	peak			


TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

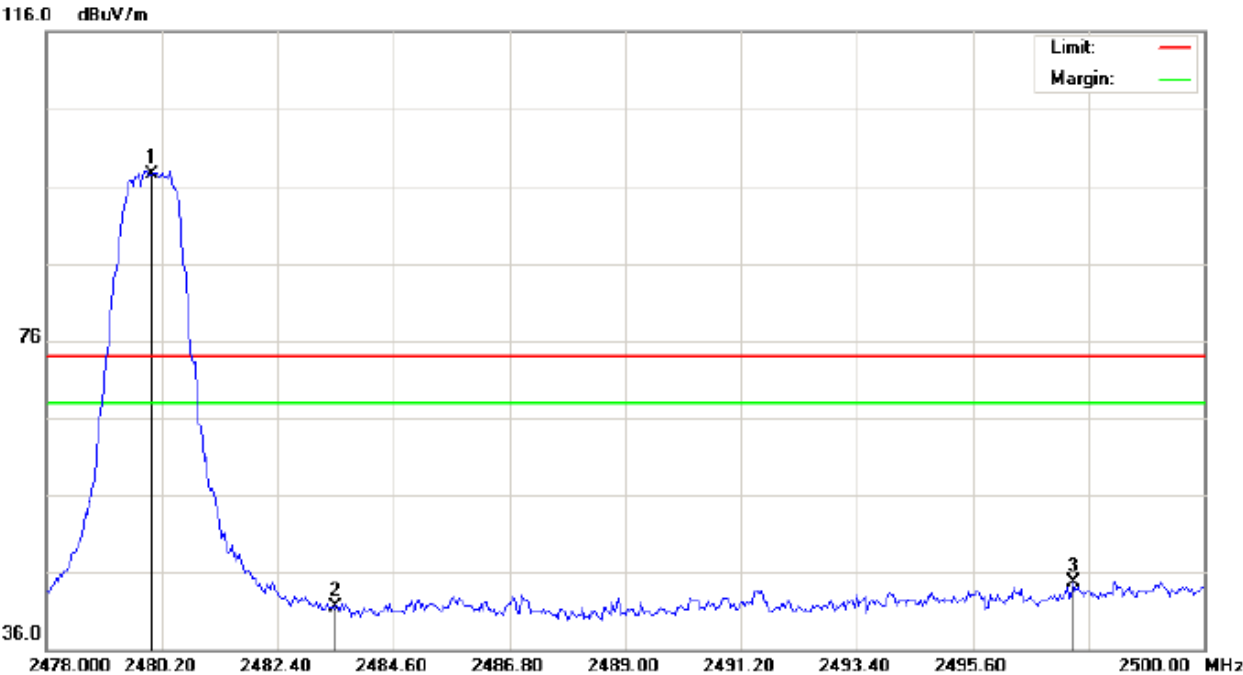

Site: site #1 Polarization: *Horizontal* Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
 EUT: Bluetooth Headset Distance:
 M/N: Valorb BTK-C5
 Mode: High Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	87.05	10.41	97.46	74.00	23.46	peak			
2		2483.500	31.19	10.41	41.60	74.00	-32.40	peak			
3		2497.507	34.26	10.43	44.69	74.00	-29.31	peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

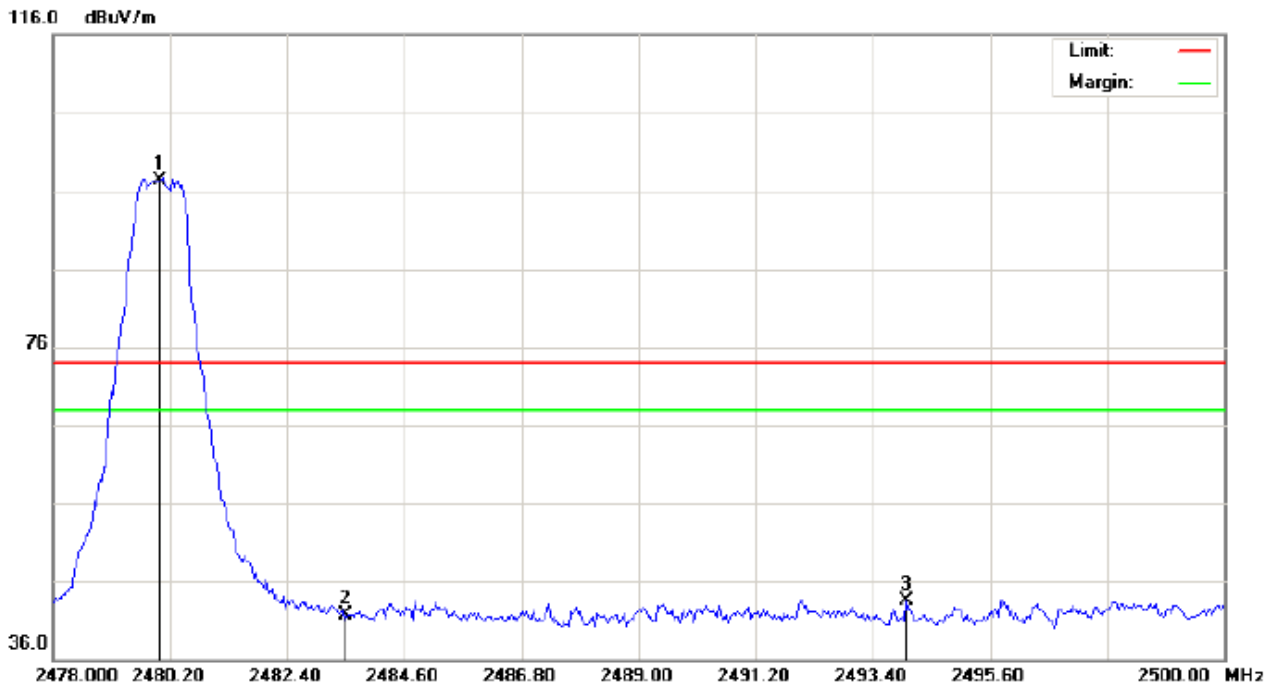

Site: site #1
Limit: FCC Class B 3M Radiation above 1GHZ(PK)
EUT: Bluetooth Headset
M/N: Valorb BTK-C5
Mode: High Channel TX
Note:

Polarization: *Vertical*
Power:
Distance:

Temperature: 26
Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	86.82	10.41	97.23	74.00	23.23	peak			
2		2483.500	31.26	10.41	41.67	74.00	-32.33	peak			
3		2494.023	33.12	10.42	43.54	74.00	-30.46	peak			

RESULT: PASS


Note: The other modes radiation emission have enough 20dB margin.

Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

FOR BLE


TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

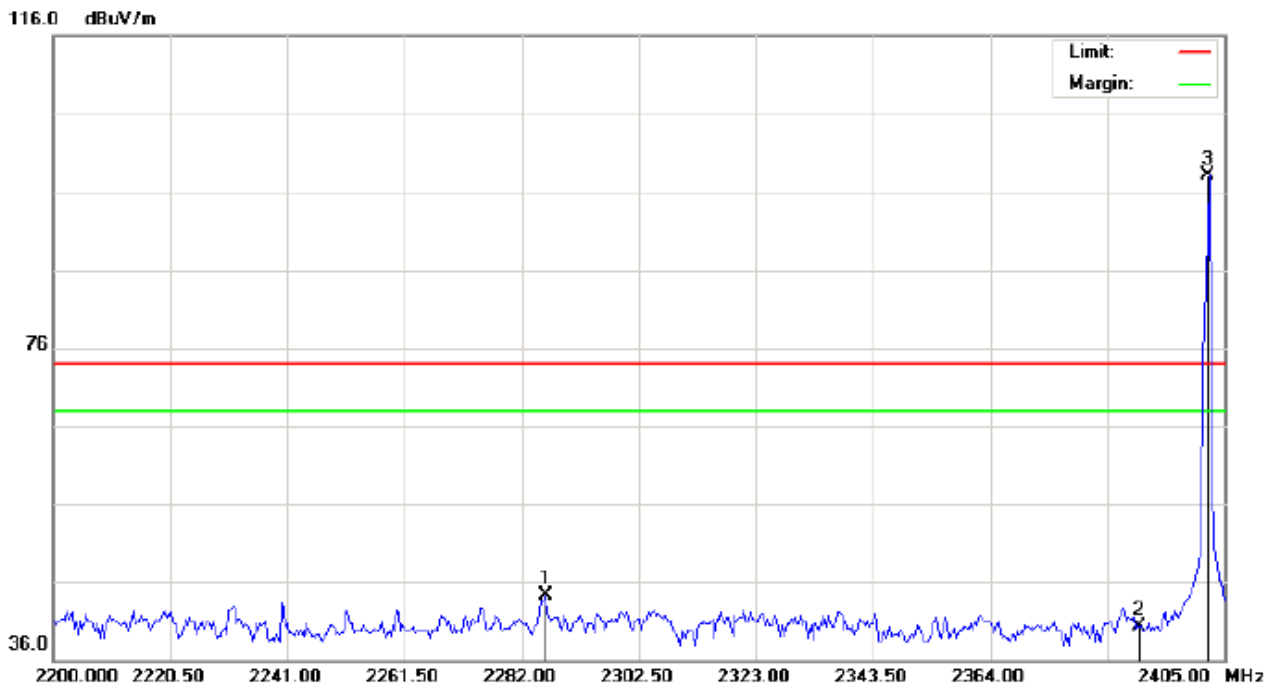

Site: site #1 Polarization: **Horizontal** Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
 EUT: Bluetooth Headset Distance:
 M/N: Valorb BTK-C5
 Mode: Low Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2286.100	34.07	10.19	44.26	74.00	-29.74	peak			
2		2390.000	30.00	10.31	40.31	74.00	-33.69	peak			
3	*	2402.000	87.72	10.32	98.04	74.00	24.04	peak			


TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

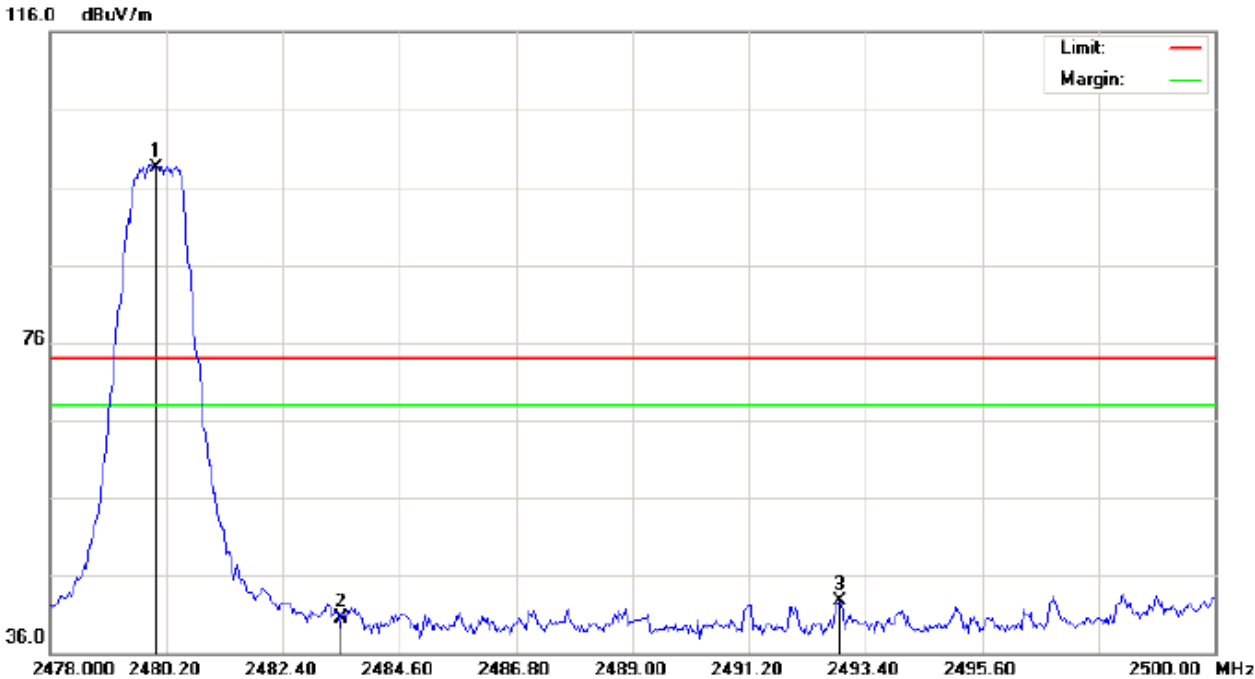

Site: site #1 Polarization: *Horizontal* Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
 EUT: Bluetooth Headset Distance:
 M/N: Valorb BTK-C5
 Mode: High Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	88.05	10.41	98.46	74.00	24.46	peak			
2		2483.500	30.19	10.41	40.60	74.00	-33.40	peak			
3		2492.923	32.33	10.42	42.75	74.00	-31.25	peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

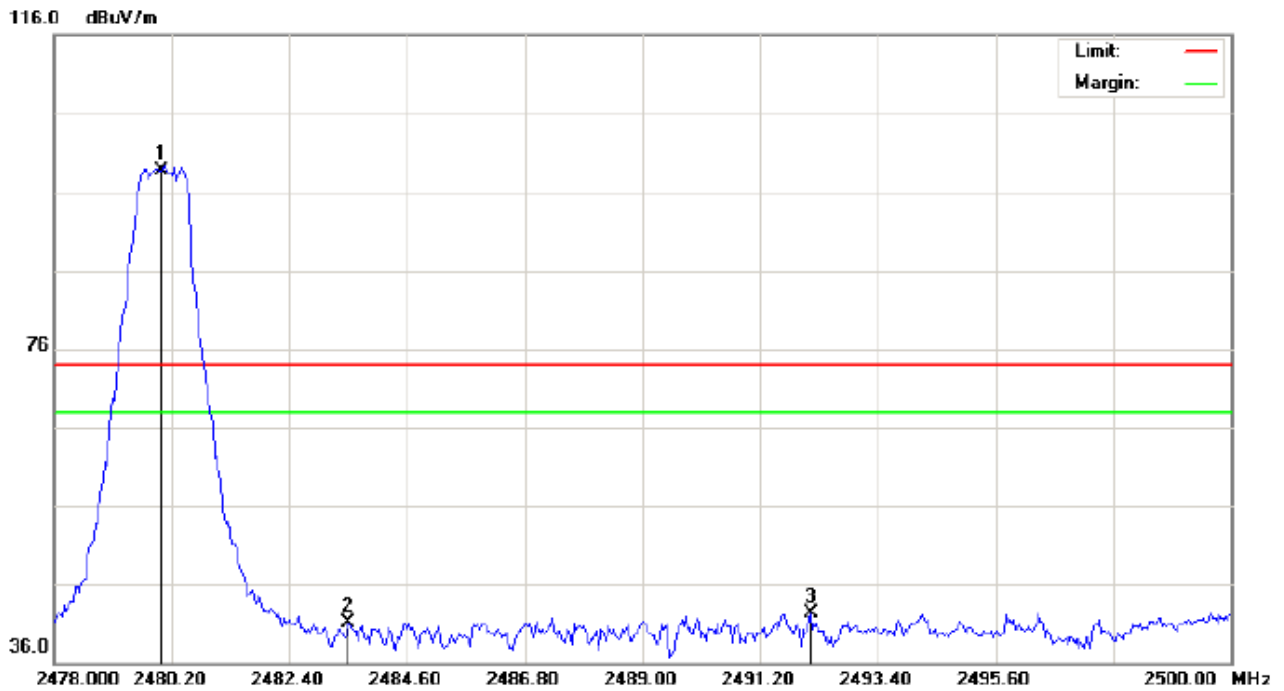

Site: site #1 Polarization: *Vertical* Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
 EUT: Bluetooth Headset Distance:
 M/N: Valorb BTK-C5
 Mode: High Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	88.32	10.41	98.73	74.00	24.73	peak			
2		2483.500	30.76	10.41	41.17	74.00	-32.83	peak			
3		2492.153	31.95	10.42	42.37	74.00	-31.63	peak			

RESULT: PASS

Note: The other modes radiation emission have enough 20dB margin.

Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.


The "Factor" value can be calculated automatically by software of measurement system.

10. 20DB BANDWIDTH

10.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
 RBW ≥ 1% of the 20 dB bandwidth, VBW ≥ RBW; Sweep = auto; Detector function = peak
4. Set SPA Trace 1 Max hold, then View.

10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

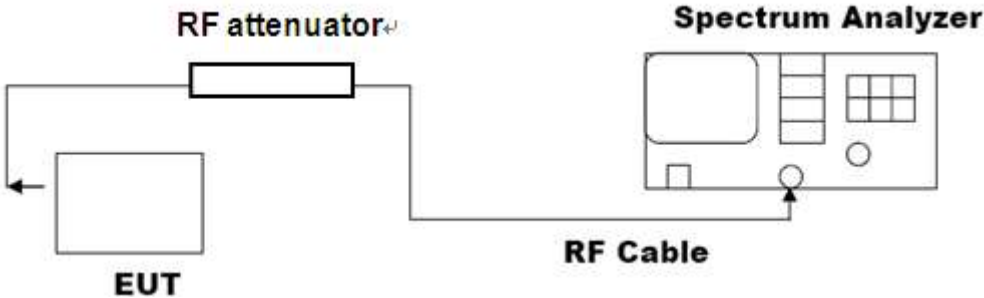


10.3. LIMITS AND MEASUREMENT RESULTS


FOR TRADITIONAL BLUETOOTH

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	0.869	PASS
	Middle Channel	0.820	PASS
	High Channel	0.893	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

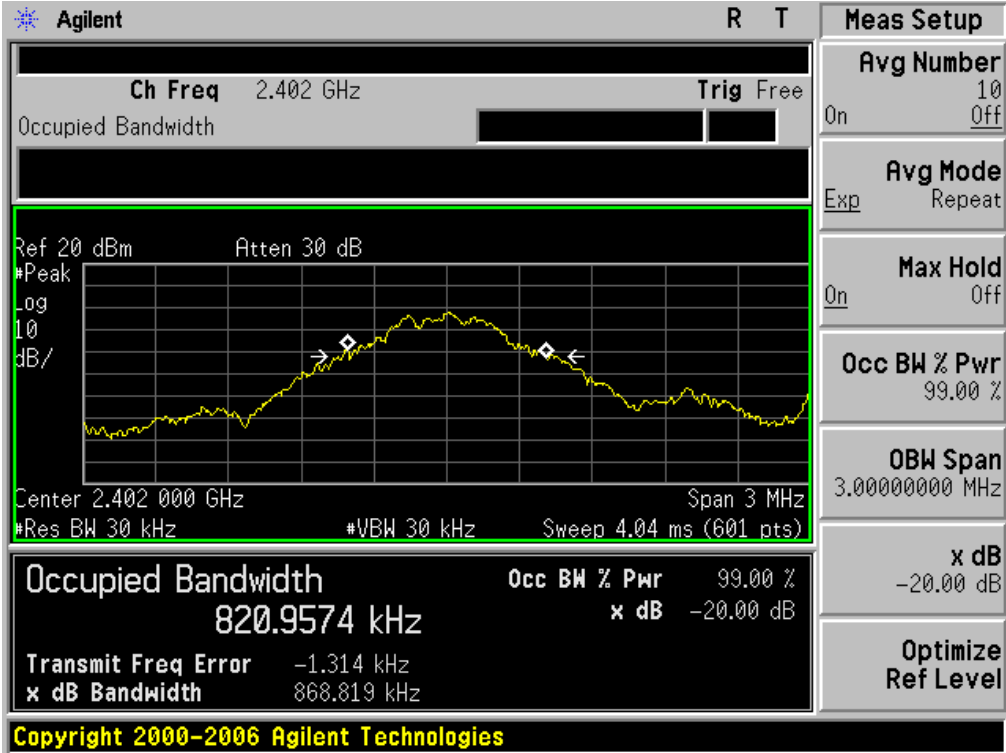

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

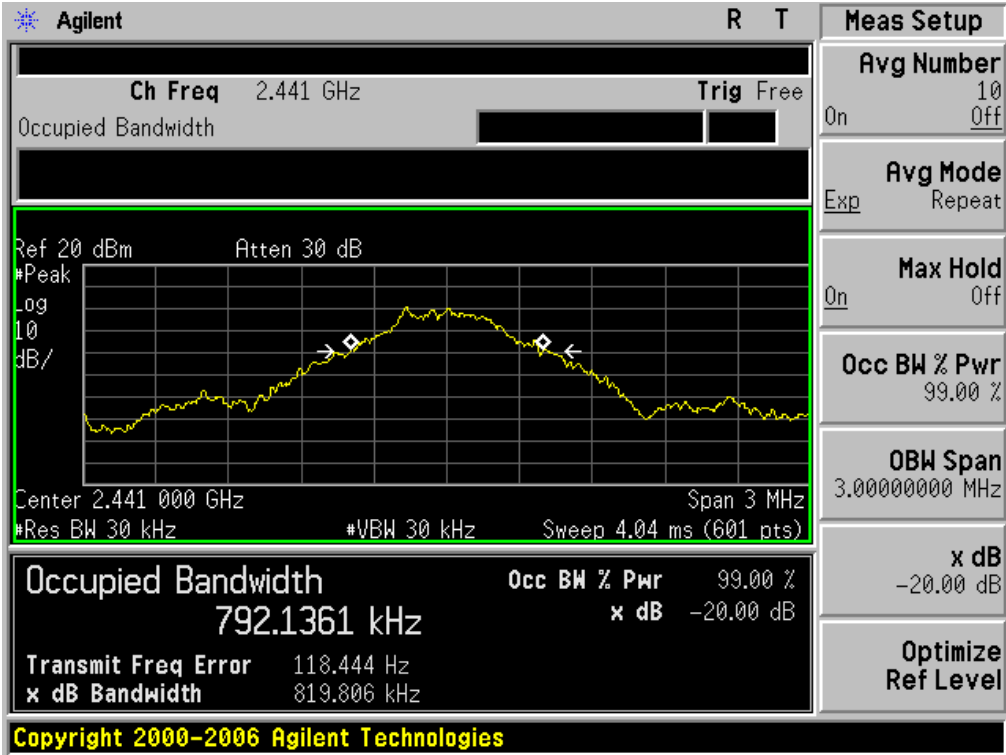


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

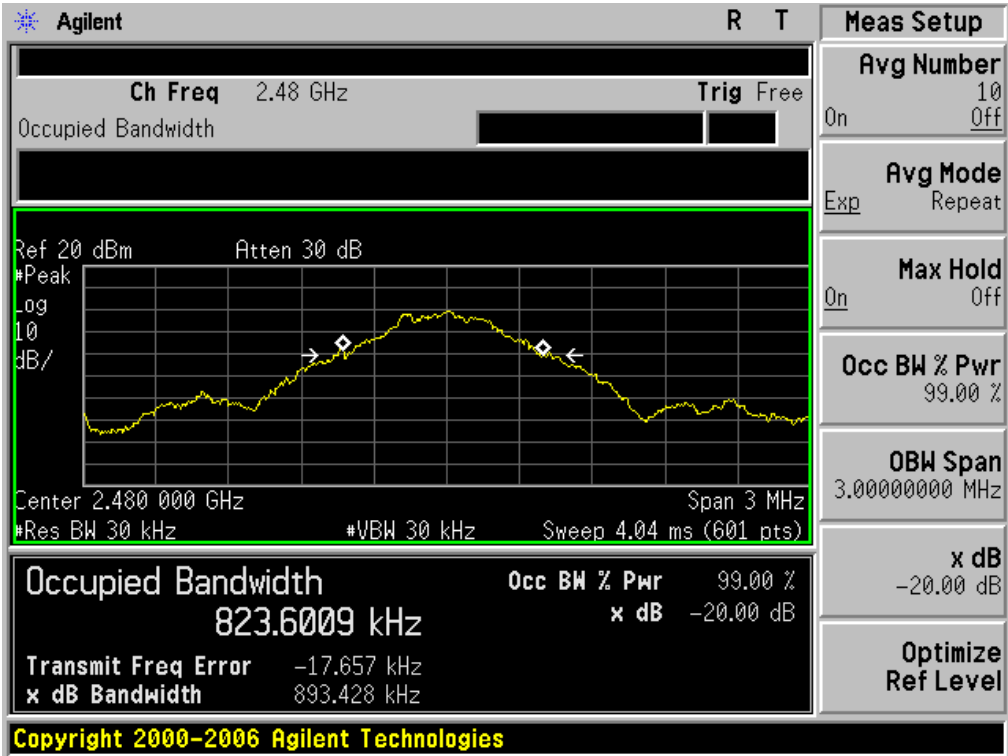


BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.247	PASS
	Middle Channel	1.264	PASS
	High Channel	1.244	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

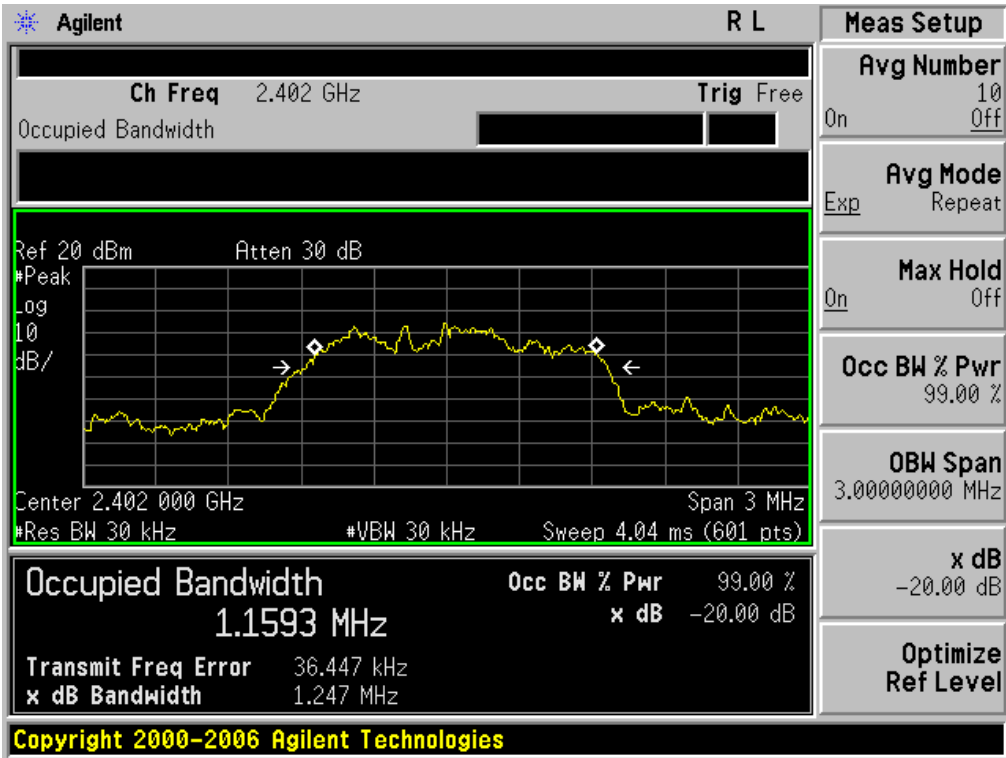

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

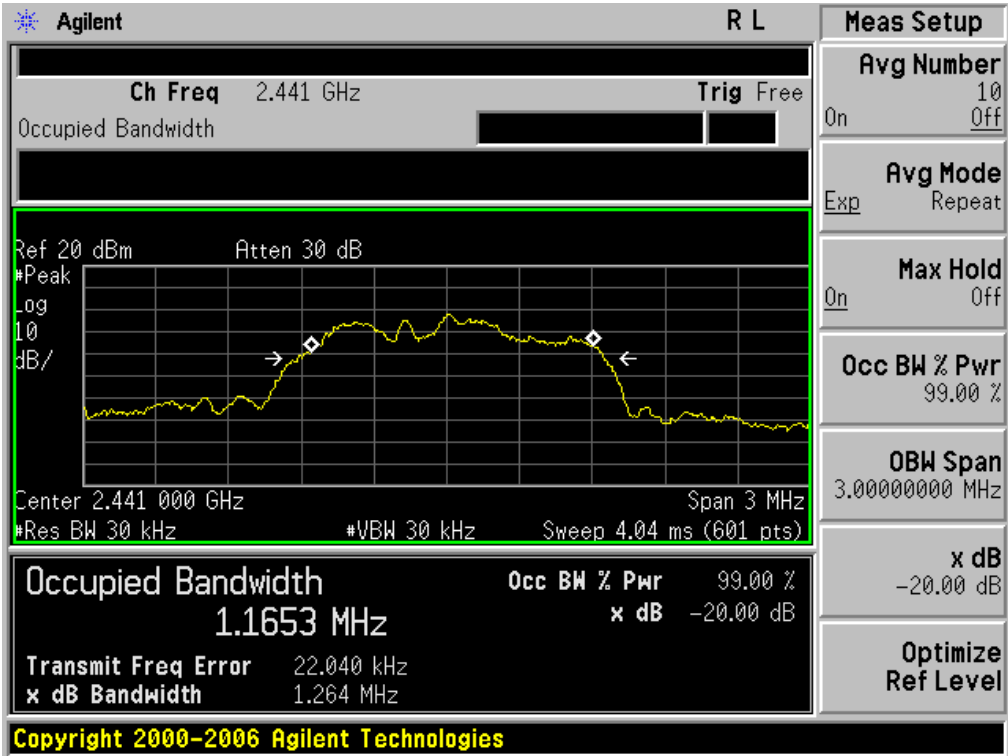


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

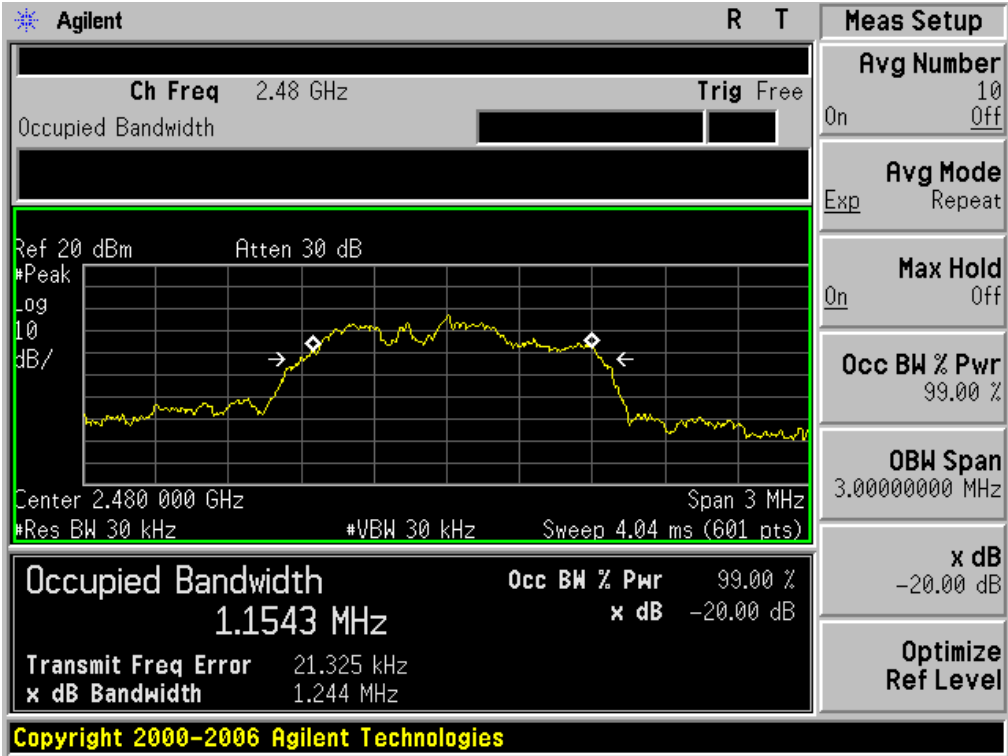


BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.236	PASS
	Middle Channel	1.272	PASS
	High Channel	1.226	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

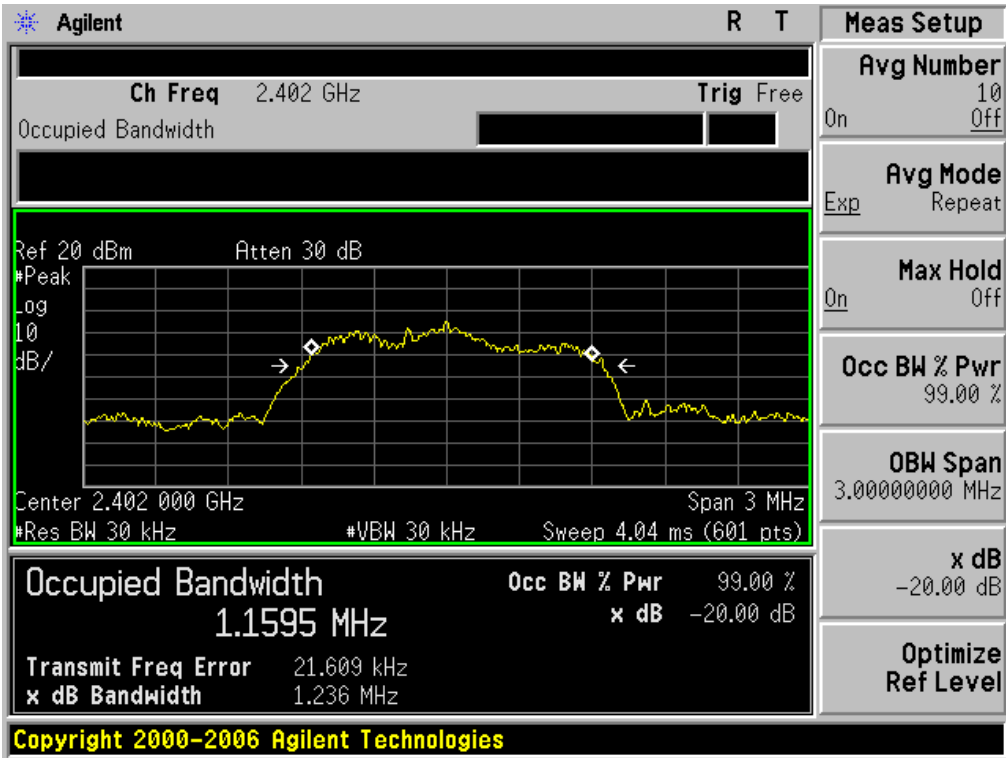


Copyright 2000-2006 Agilent Technologies

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

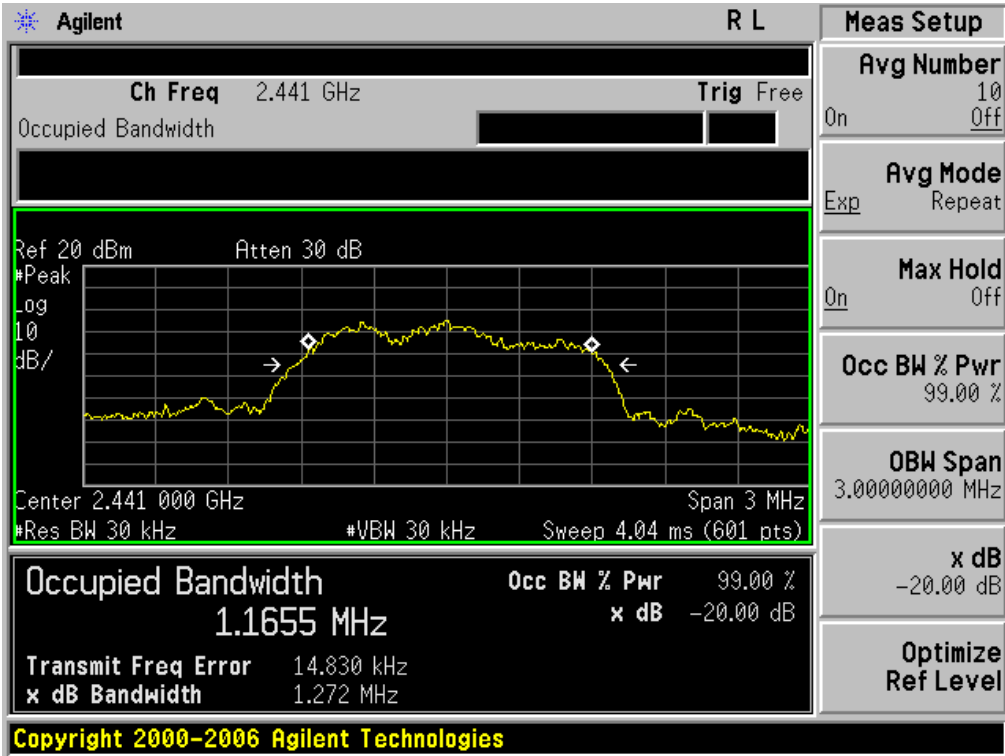


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

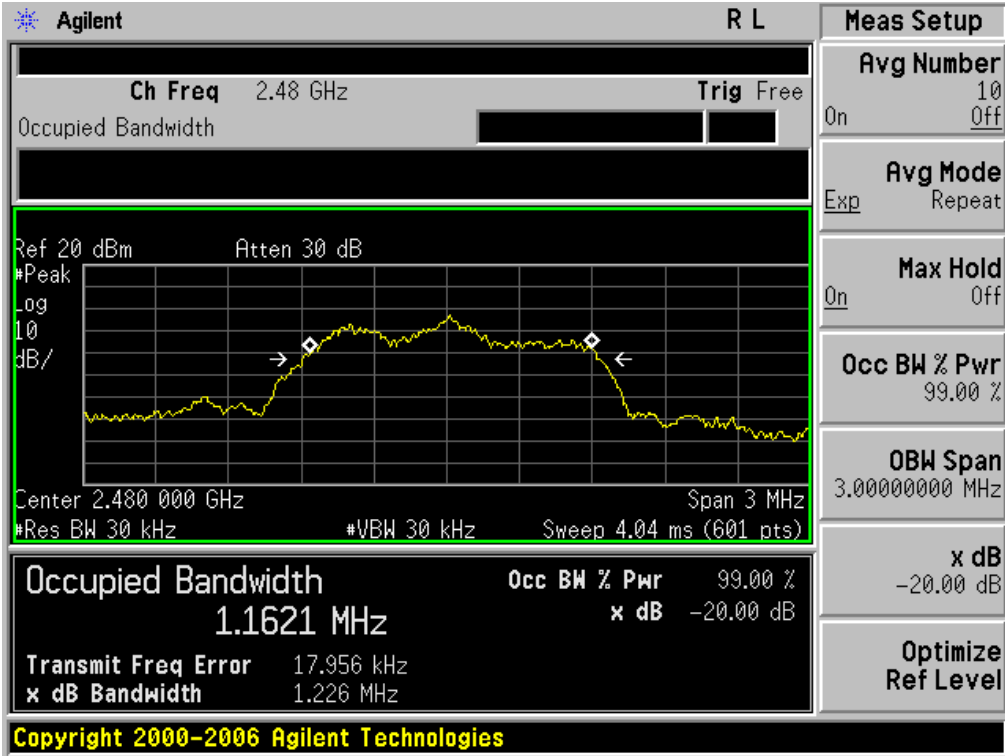


FOR BLE

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.202	PASS
	Middle Channel	1.217	PASS
	High Channel	1.212	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

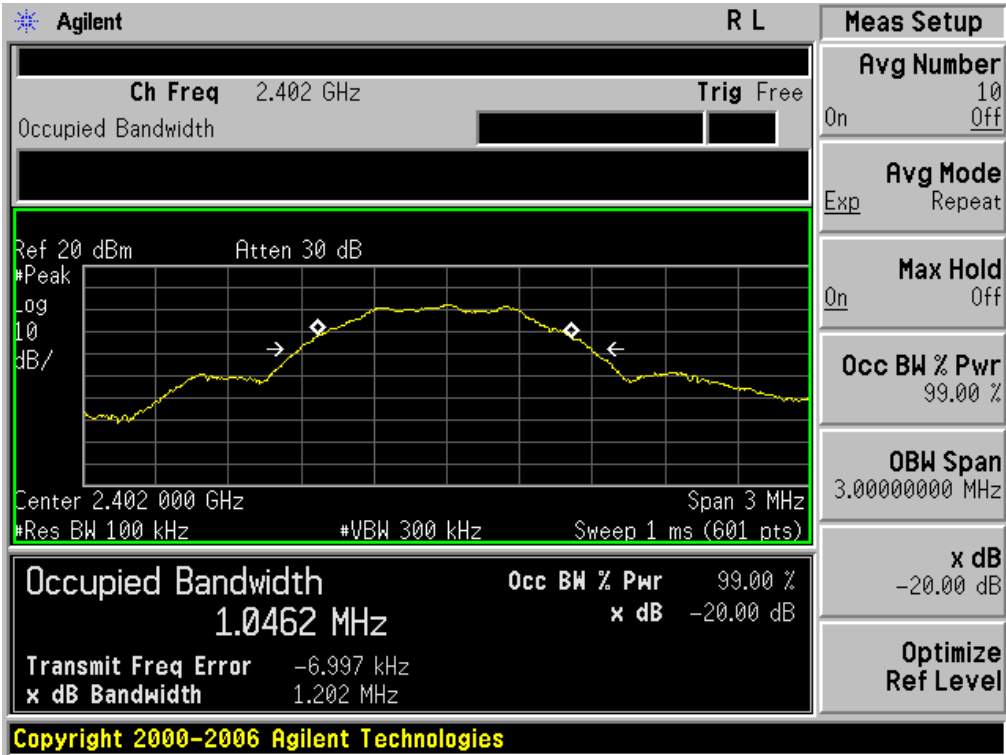

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

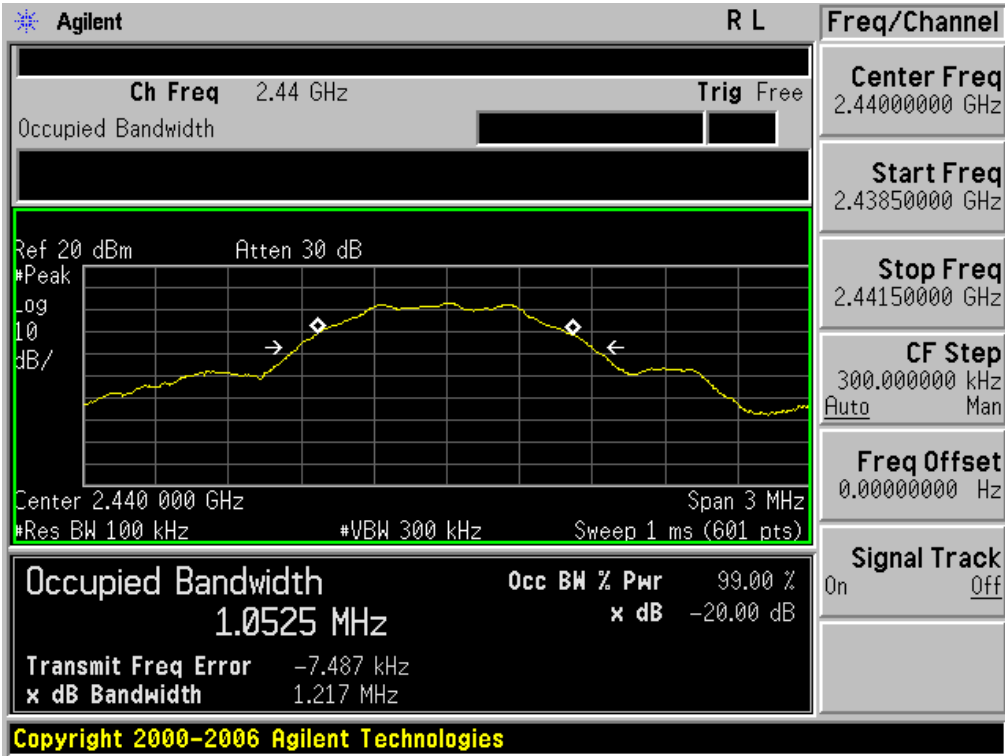

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

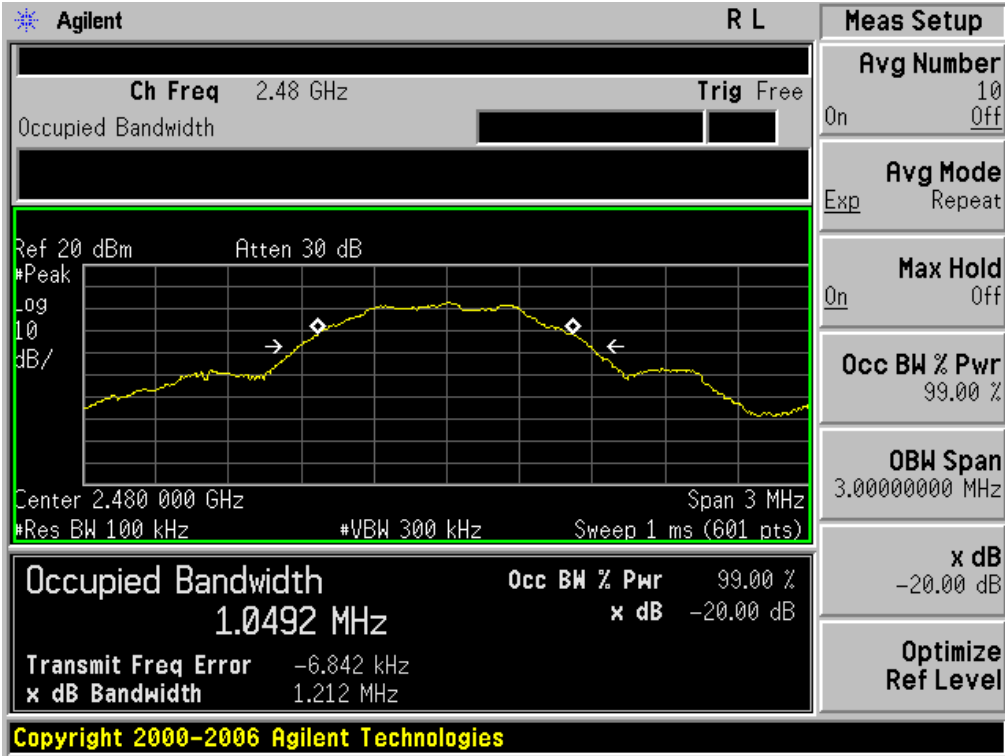

11. FCC LINE CONDUCTED EMISSION TEST


11.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

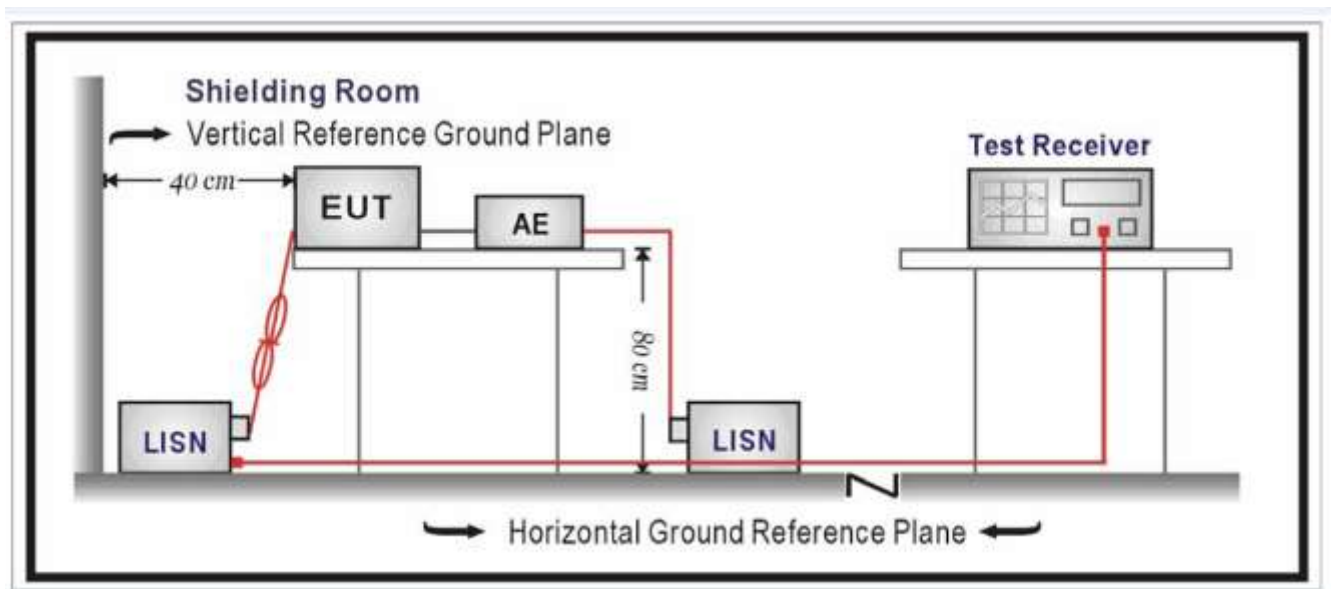

11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.4.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received DC charging voltage by PC which received 120V/60Hz power by a LISN..
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.

**11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST
FOR TRADITIONAL BLUETOOTH**


Line Conducted Emission Test Line 1-L

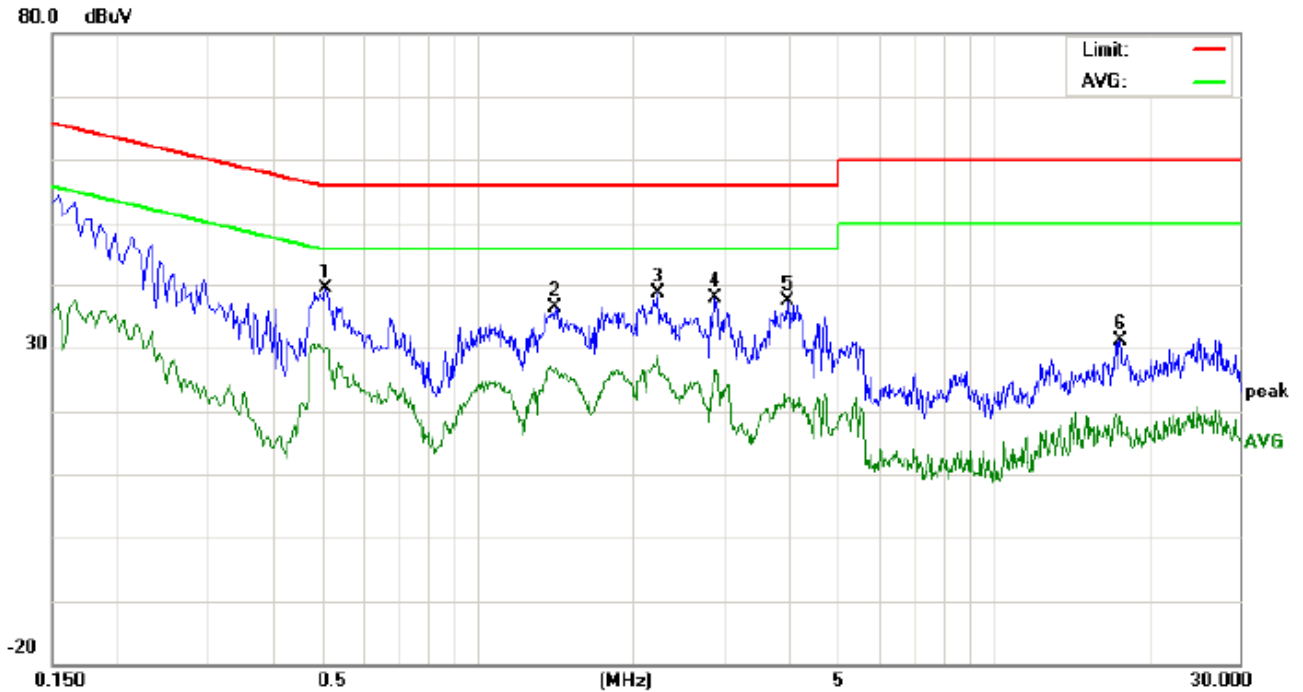

Site: Conduction Phase: **L1** Temperature: 25.6
 Limit: FCC Class B Conduction(QP) Power: Humidity: 52.5 %
 EUT: Bluetooth Headset
 M/N: Valorb BTK-C5
 Mode: Normal operation with charging
 Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor (dB)	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.5100	28.91		19.66	10.39	39.30		30.05	56.00	46.00	-16.70	-15.95	P	
2	1.4180	25.95		16.43	10.38	36.33		26.81	56.00	46.00	-19.67	-19.19	P	
3	2.2380	28.20		18.51	10.32	38.52		28.83	56.00	46.00	-17.48	-17.17	P	
4	2.8980	27.44		16.22	10.53	37.97		26.75	56.00	46.00	-18.03	-19.25	P	
5	3.9940	26.84		11.74	10.43	37.27		22.17	56.00	46.00	-18.73	-23.83	P	
6	17.6140	21.12		9.07	10.12	31.24		19.19	60.00	50.00	-28.76	-30.81	P	

Line Conducted Emission Test Line 2-N

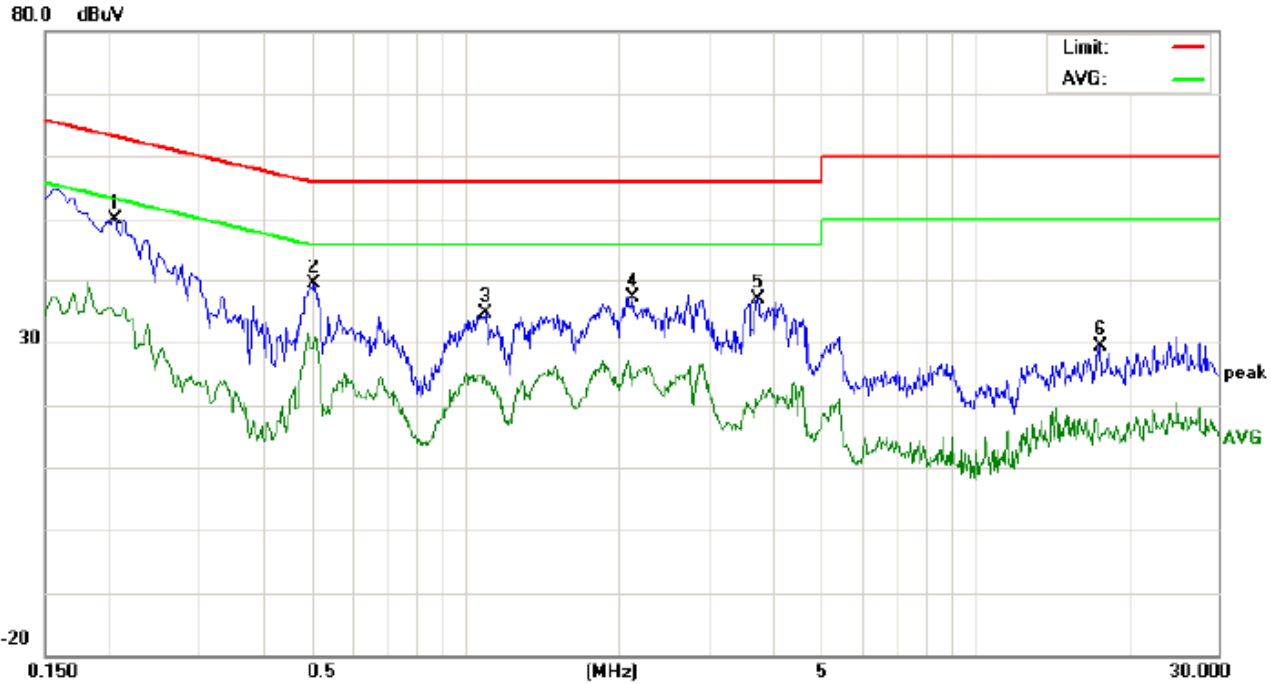


Site: Conduction Phase: **N** Temperature: 25.6
 Limit: FCC Class B Conduction(QP) Power: Humidity: 52.5 %
 EUT: Bluetooth Headset
 M/N: Valorb BTK-C5
 Mode: Normal operation with charging
 Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor (dB)	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.2060	42.92		24.21	10.22	53.14		34.43	63.36	53.36	-10.22	-18.93	P	
2	0.5060	28.92		18.88	10.39	39.31		29.27	56.00	46.00	-16.69	-16.73	P	
3	1.0940	24.32		13.07	10.37	34.69		23.44	56.00	46.00	-21.31	-22.56	P	
4	2.1380	26.73		13.84	10.28	37.01		24.12	56.00	46.00	-18.99	-21.88	P	
5	3.7540	26.46		9.77	10.47	36.93		20.24	56.00	46.00	-19.07	-25.76	P	
6	17.6180	19.16		4.30	10.12	29.28		14.42	60.00	50.00	-30.72	-35.58	P	

FOR BLE


Line Conducted Emission Test Line 1-L

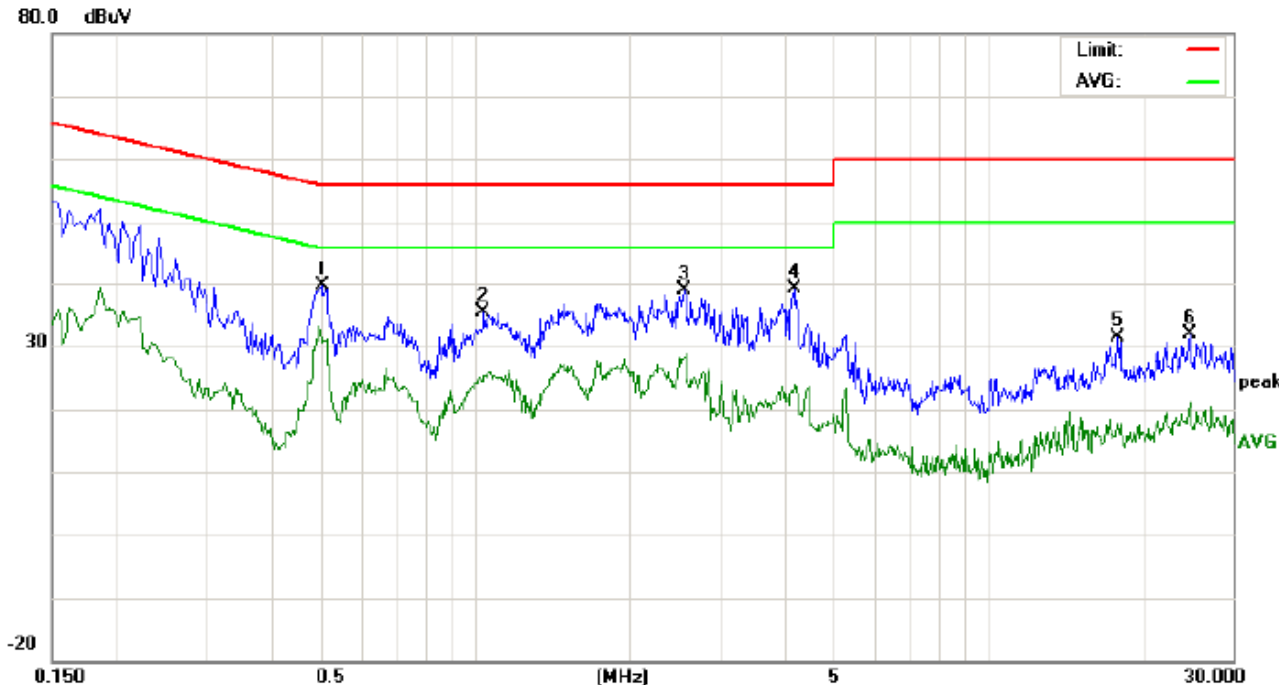

Site: Conduction Phase: **L1** Temperature: 25.6
 Limit: FCC Class B Conduction(QP) Power: Humidity: 52.5 %
 EUT: Bluetooth Headset
 M/N: Valorb BTK-C5
 Mode: Normal operation with charging
 Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor (dB)	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.5020	29.28		20.45	10.40	39.68		30.85	56.00	46.00	-16.32	-15.15	P	
2	1.0380	24.95		15.06	10.37	35.32		25.43	56.00	46.00	-20.68	-20.57	P	
3	2.5540	28.36		17.66	10.44	38.80		28.10	56.00	46.00	-17.20	-17.90	P	
4	4.1900	28.76		13.53	10.35	39.11		23.88	56.00	46.00	-16.89	-22.12	P	
5	17.8779	21.15		7.42	10.12	31.27		17.54	60.00	50.00	-28.73	-32.46	P	
6	24.7900	21.76		10.90	10.12	31.88		21.02	60.00	50.00	-28.12	-28.98	P	

Line Conducted Emission Test Line 2-N

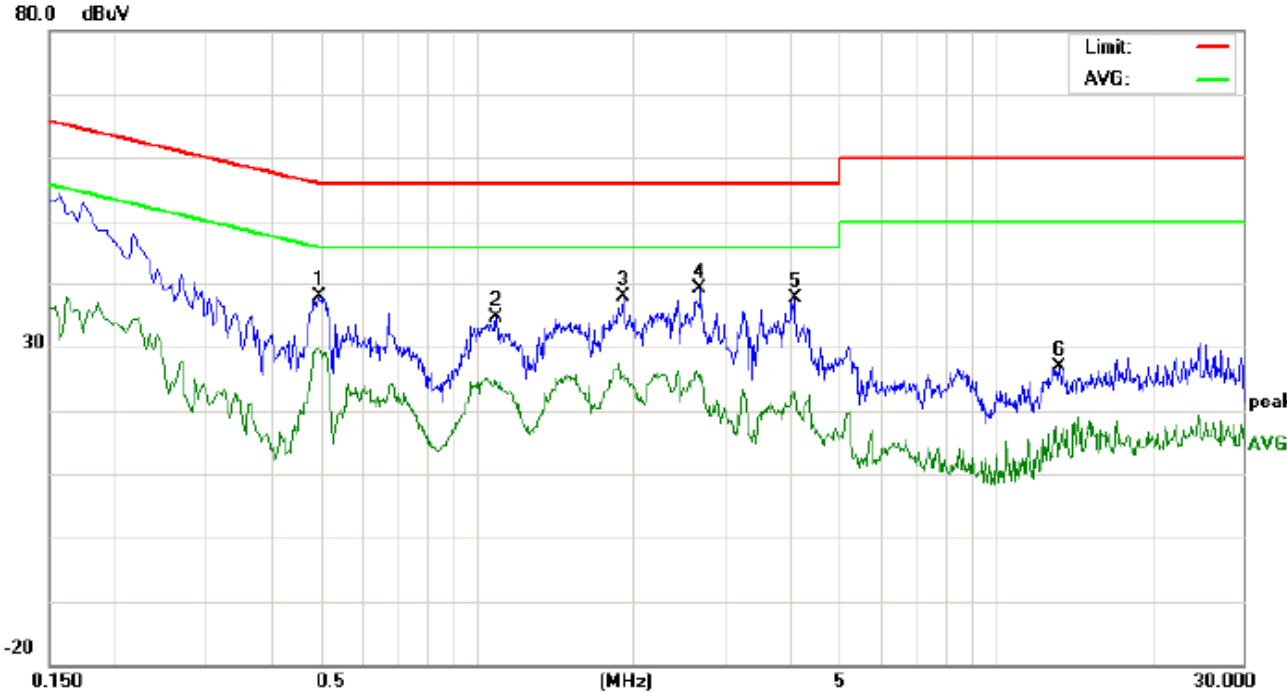

Site: Conduction Phase: **N** Temperature: 25.6
 Limit: FCC Class B Conduction(QP) Power: Humidity: 52.5 %
 EUT: Bluetooth Headset
 M/N: Valorb BTK-C5
 Mode: Normal operation with charging
 Note:


No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		dB	Peak	QP	AVG	QP	AVG	QP		
1	0.4980	27.59		19.14	10.40	37.99		29.54	56.03	46.03	-18.04	-16.49	P	
2	1.0900	24.14		13.73	10.37	34.51		24.10	56.00	46.00	-21.49	-21.90	P	
3	1.9100	27.59		14.90	10.25	37.84		25.15	56.00	46.00	-18.16	-20.85	P	
4	2.6980	28.54		14.65	10.48	39.02		25.13	56.00	46.00	-16.98	-20.87	P	
5	4.1020	27.16		12.00	10.39	37.55		22.39	56.00	46.00	-18.45	-23.61	P	
6	13.3100	16.69		4.21	10.13	26.82		14.34	60.00	50.00	-33.18	-35.66	P	

APPENDIX A: PHOTOGRAPHS OF TEST SETUP
FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP



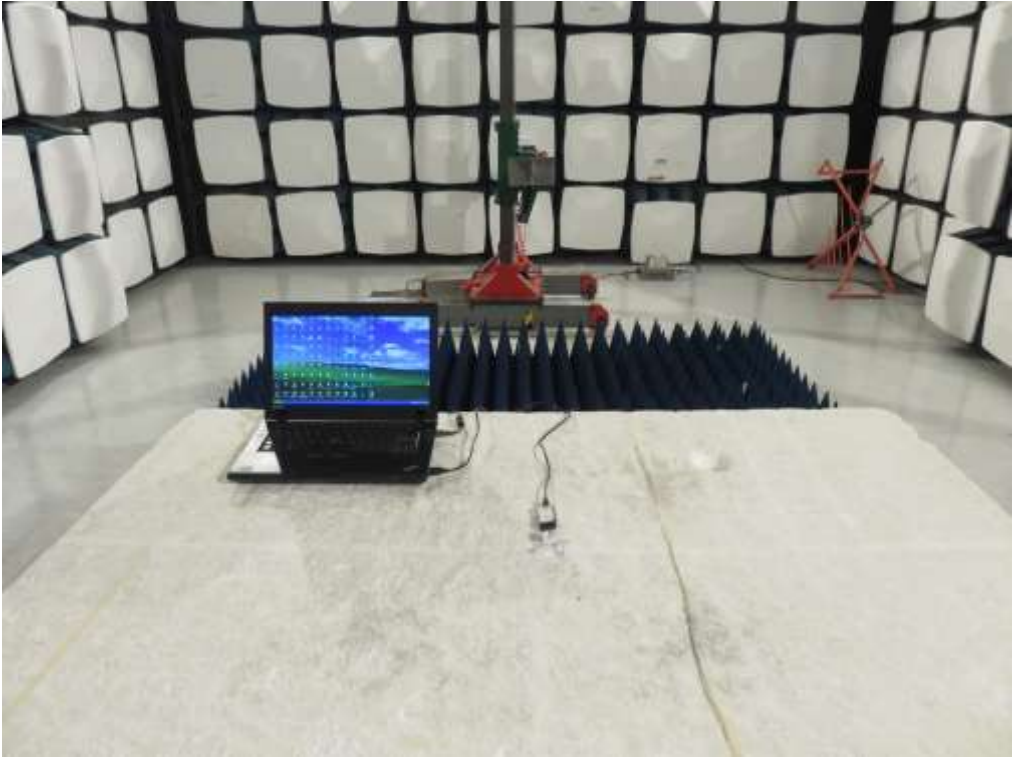

APPENDIX B: PHOTOGRAPHS OF EUT
TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



BACK VIEW OF EUT



LEFT VIEW OF EUT



RIGHT VIEW OF EUT




VIEW OF EUT (PORT)




OPEN VIEW OF EUT



INTERNAL VIEW OF EUT-1

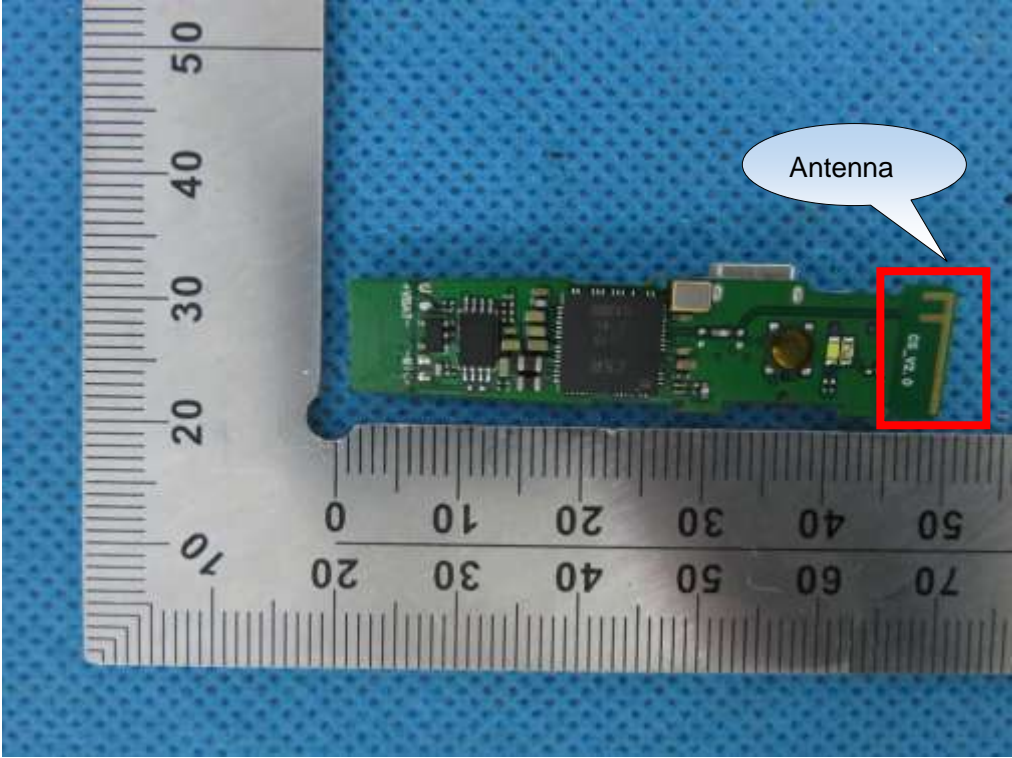

INTERNAL VIEW OF EUT-2

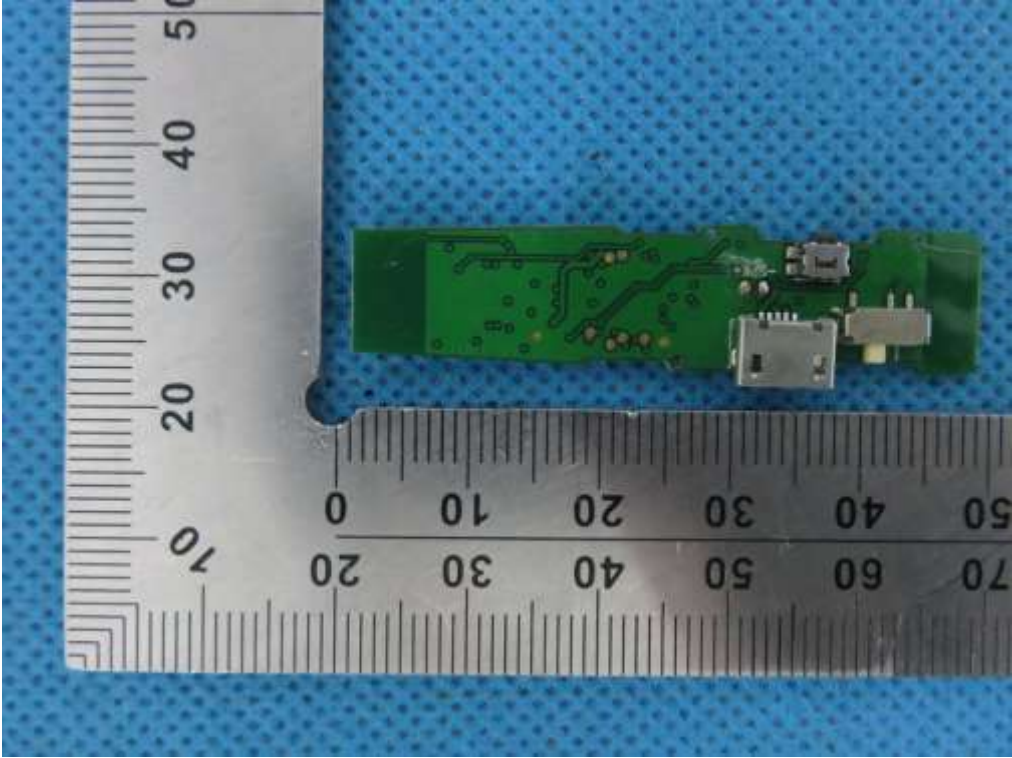

INTERNAL VIEW OF EUT-3



----END OF REPORT----